



Hewlett-Packard Company

TPC Benchmark™ C
Full Disclosure Report
for
HP ProLiant DL585G5/2.7 GHz
using
Microsoft SQL Server 2005 Enterprise x64 Edition SP2
and
Windows Server 2003 R2 Enterprise x64 Edition SP2

First Edition
Submitted for Review
November 17, 2008

First Edition –November 2008

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2008 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2008

HP ProLiant DL585G5, and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows 2003, Windows Server R2 2003 x64 and SQL Server 2005 x64 are registered trademarks of Microsoft Corporation.

Xeon is a registered trademark of Intel.

Opteron is a registered trademark of AMD.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Table of Contents

TABLE OF CONTENTS	3
PREFACE	5
TPC BENCHMARK C OVERVIEW.....	5
ABSTRACT	6
OVERVIEW.....	6
TPC BENCHMARK C METRICS.....	6
STANDARD AND EXECUTIVE SUMMARY STATEMENTS	6
AUDITOR	6
GENERAL ITEMS.....	10
TEST SPONSOR.....	10
APPLICATION CODE AND DEFINITION STATEMENTS.....	10
PARAMETER SETTINGS	10
CONFIGURATION ITEMS	10
CLAUSE 1 RELATED ITEMS	12
TABLE DEFINITIONS	12
PHYSICAL ORGANIZATION OF DATABASE	12
<i>Benchmarked Configuration:</i>	12
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:.....	14
INSERT AND DELETE OPERATIONS.....	14
PARTITIONING	14
REPLICATION, DUPLICATION OR ADDITIONS	14
CLAUSE 2 RELATED ITEMS	15
RANDOM NUMBER GENERATION.....	15
INPUT/OUTPUT SCREEN LAYOUT.....	15
PRICED TERMINAL FEATURE VERIFICATION.....	15
PRESENTATION MANAGER OR INTELLIGENT TERMINAL	15
TRANSACTION STATISTICS	16
QUEUEING MECHANISM	16
CLAUSE 3 RELATED ITEMS	17
TRANSACTION SYSTEM PROPERTIES (ACID)	17
ATOMICITY	17
<i>Completed Transactions</i>	17
<i>Aborted Transactions</i>	17
CONSISTENCY	17
ISOLATION	17
DURABILITY	18
<i>Durable Media Failure</i>	18
<i>Instantaneous Interruption and Loss of Memory</i>	19
CLAUSE 4 RELATED ITEMS	20
INITIAL CARDINALITY OF TABLES	20
DATABASE LAYOUT	20
TYPE OF DATABASE.....	20

DATABASE MAPPING	21
60 DAY SPACE.....	21
CLAUSE 5 RELATED ITEMS.....	22
THROUGHPUT	22
KEYING AND THINK TIMES.....	22
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS	23
STEADY STATE DETERMINATION	28
WORK PERFORMED DURING STEADY STATE.....	28
MEASUREMENT PERIOD DURATION.....	28
REGULATION OF TRANSACTION MIX.....	29
TRANSACTION STATISTICS	29
CHECKPOINT COUNT AND LOCATION	30
CHECKPOINT DURATION.....	30
CLAUSE 6 RELATED ITEMS.....	31
RTE DESCRIPTIONS	31
EMULATED COMPONENTS	31
FUNCTIONAL DIAGRAMS	31
NETWORKS	31
OPERATOR INTERVENTION	31
CLAUSE 7 RELATED ITEMS.....	32
SYSTEM PRICING	32
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE.....	32
COUNTRY SPECIFIC PRICING.....	32
USAGE PRICING	32
CLAUSE 9 RELATED ITEMS.....	33
AUDITOR'S REPORT.....	33
AVAILABILITY OF THE FULL DISCLOSURE REPORT.....	33
APPENDIX A: SOURCE CODE	A-1 - A-111
APPENDIX B: DATABASE DESIGN	B-1 - B-57
APPENDIX C: TUNABLE PARAMETERS	C-1 - C-79
APPENDIX D: 60-DAY SPACE	D-1 - D-3
APPENDIX E: THIRD PARTY QUOTES	E-1 - E-4
APPENDIX F: PRICE VERIFICATION.....	F-1

Preface

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.9.

TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant DL585G5. The operating system used for the benchmark was Windows Server R2 2003, Enterprise x64 Edition SP2. The DBMS used was Microsoft SQL Server 2005 Enterprise x64 Edition SP2.

TPC Benchmark C Metrics

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

579,814tpmC
USD \$0.96 per tpmC


The availability date is November 17, 2008.

Standard and Executive Summary Statements

The following pages contain executive summary of results for this benchmark.

Auditor

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

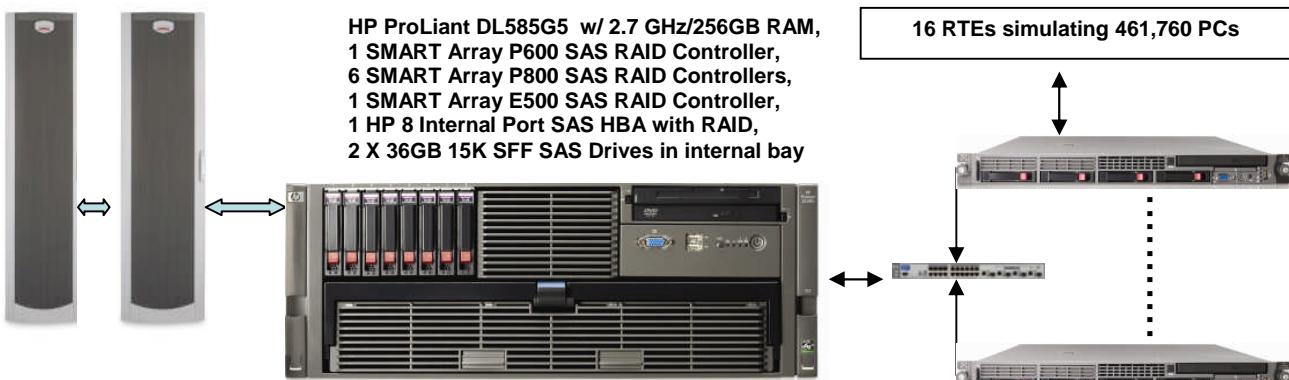Hewlett-Packard Company		HP ProLiant DL585 G5 2.7GHz/2MB		TPC-C Rev. 5.9
		C/S with 16 HP ProLiant DL360 G5		Report Date: Nov 17, 2008
Total System Cost		TPC-C Throughput		Price/Performance
USD \$551,984		579,814		USD \$0.96
Database Server Processors /Cores/Threads	Database Manager	Operating System	Other Software	Number of Users
4/16/16 AMD 8384 2.7 GHz QC	Microsoft SQL Server 2005 Enterprise x64 Edition SP2	Windows Server 2003 R2 Enterprise x64 Edition SP2	Microsoft Visual C++ Microsoft COM+	461,760
 <p>HP ProLiant DL585G5 w/ 2.7 GHz/256GB RAM, 1 SMART Array P600 SAS RAID Controller, 6 SMART Array P800 SAS RAID Controllers, 1 SMART Array E500 SAS RAID Controller, 1 HP 8 Internal Port SAS HBA with RAID, 2 X 36GB 15K SFF SAS Drives in internal bay</p> <p>16 RTEs simulating 461,760 PCs</p> <p>2 HP 5642 Racks containing: 28 X MSA 70 StorageWorks Enclosures with 25 X 36 GB 15K SFF SAS Drives each and 2 X MSA 70 StorageWorks Enclosure with 15 X 146GB 10K SFF SAS Drives each</p> <p>HP ProCurve Switch 3400cl-48G 16 HP ProLiant DL360 G5</p>				
System Components		Server	Each Client	
Processors/Cores/Threads		Quantity 4/16/16 Description AMD 8384 2.7 GHz 2MB L2 cache 6MB L3	Quantity 1/2/2 Description 2.83 GHz Intel Xeon w/ 4MB cache	
Memory		256GB (32x 8GB) GB DDR2	1GB 1GB PC2-5300 FBD	
Disk Controllers		1 Smart P600 Controller 6 Smart P800 Controller 1 Smart E500 Controller 1 8 Internal Port SAS HBA	1 Integrated Smart Array P400i Controller	
Disk Drives		30 146GB 10K SFF SAS 700 36 GB 15K SFF SAS 2 36 GB 15K SFF SAS	2 36 GB SAS Drive	
Total Storage		27,828.60 GB	36 GB	

Hewlett-Packard Company	HP ProLiant DL585G5				TPC-C Rev. 5.9	
				Report Date	17-Nov-08	
Description	Part Number	Brand	Unit Price	Qty	Extended Price	3 yr. Maint. Price
Server Hardware						
HP ProLiant DL585 G5 Rack 2.7GHz 4P/8GB dual port NIC	500924-001	1	16,849	1	16,849	
16GB PC2-5300 2 x 8GB Kit	408855-B21	1	2,399	16	38,384	
HP Smart Array P800/512MB SAS Controller	381513-B21	1	949	6	5,694	
HP SA Cache Battery Kit	435129-B21	1	109	1	109	
HP Smart Array E500/256 SAS Controller	383280-B21	1	499	1	499	
HP 8 Internal Port SAS HBA with RAID	347786-B21	1	199	1	199	
HP SMART Array P600 3G SAS/SATA RAID Controller	337972-B21	1	729	1	729	
HP L1506 LCD Monitor	PX848AA#ABA	1	209	1	209	
HP PS/2 Keyboard And Mouse Bundle	RC464AA#ABA	1	39	1	39	
HP 5642 Pallet Unassembled Rack	358254-B21	1	865	2	1,730	
HP R1.5 kVA 1U NA UPS	AF419A	1	739	1	739	
HP 36GB 15k 2.5 Single Port HP SAS Drive	431933-B21	1	349	700	244,300	
HP 36GB 15k 2.5 Single Port HP SAS Drive (10% Spares)	431933-B21	1	349	70		24,430
HP 146 GB 3G SAS 10K SFF SP HDD	431958-B21	1	319	30	9,570	
HP 146 GB 3G SAS 10K SFF SP HDD (10% Spares)	431958-B21	1	319	3		957
HP 36GB 15k 2.5 Single Port HP SAS Drive	431933-B21	1	349	2	698	
HP StorageWorks MSA-70 Storage	418800-B21	1	3,199	30	95,970	
HP StorageWorks MSA-70 Storage (10% Spares)	418408-B21	1	3,199	3		9,597
HP 3y 4h 24x7 ProLiant D58x HW Support ,Proliant Server DL58x	U4608E	1	1,575	1		1,575
				Subtotal	415,718	36,559
Server Software						
Microsoft SQL Server 2005 Enterprise X64 Edition(per processor)	810-03134	2	23,432	4	93,728	Incl Below
Visual Studio Standard 2005	127-0012	2	250	1	250	Incl Below
Microsoft Windows 2003 Server R2 Enterprise X64 Edition	P72-01684	2	2,334	1	2,334	Incl Below
Microsoft Problem Resolution Services		2	245	1		245
				Subtotal	96,312	245
Client Hardware						
HP DL360R05 E5440 2G US Svr	457923-001	1	2,799	16	44,784	
Dual Integrated Gigabit NIC, HP Smart Array P400i/256MB Controller						
HP 36GB 15k 2.5 Single Port HP SAS Drive	431933-B21	1	349	32	11,168	
HP L1506 LCD Monitor	PX848AA#ABA	1	209	1	209	
HP PS/2 Keyboard And Mouse Bundle	RC464AA#ABA	1	39	1	39	
HP CAT5 0x2x16 KVM Server Console Switch	336045-B21	1	1,099	1	1,099	
HP IP Console 8 pack Interface Adapter	262587-B21	1	709	2	1,418	
HP CP 3Y 4H 24x7 HW Entry300 4-Hour 24 Hour x 7 Day Coverage 3 Years	U4497E	1	596	16		9,536
				Subtotal	58,717	9,536
Client Software						
Windows Server 2003 R2 Standard Edition	P73-01972	2	719	16	11,504	Incl. Above
				Subtotal	11,504	0
User Connectivity						
HP ProCurve Switch 3400cl-48G	J4906A#ABA	1	6,899	1	6,899	
HP CP for HP ProCurve Networking products 3 Yr 4 hr/24x7	H2893E	1	1,700	1		1,700
CAT 6 7 Foot Gray Patch Cable	CB242-7G	3	2	34	68	
CAT 6 7 Foot Gray Patch Cable	CB242-7G	3	2	2		4
				Subtotal	6,967	1,704
Large Purchase and Net 30 discount (See Note 1)	16.0%	1			(\$77,013)	(\$7,647)
				Total	\$512,205	\$40,397
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.						
Three-Year Cost of Ownership: USD \$552,602						
tpmC Rating: 579,814						
\$ / tpmC: USD \$0.96						
Pricing: 1=HP Direct 800-203-6748 2= Microsoft 3= deepsurplus.com						
Note 1 = Discount based on HP Direct guidance applies to all lines where pricing = 1						
Note 2 = The benchmark results were audited by Lorna Livingtree of Performance Metrics						

Numerical Quantities Summary

MQTH, Computed Maximum Qualified Throughput

579,814 tpmC

Response Times (in seconds)	Average	90%	Maximum
New-Order	0.31	0.57	8.56
Payment	0.28	0.54	5.09
Order-Status	0.32	0.57	9.43
Delivery (interactive portion)	0.12	0.14	3.48
Delivery (deferred portion)	0.14	0.19	5.00
Stock-Level	0.33	0.59	4.66
Menu	0.13	0.15	3.50
Transaction Mix, in percent of total transaction			
New-Order			44.95%
Payment			43.02%
Order-Status			4.01%
Delivery			4.01%
Stock-Level			4.01%
Emulation Delay (in seconds)			
New-Order	0.10	0.10	0.10
Payment	0.10	0.10	0.10
Order-Status	0.10	0.10	0.10
Delivery (interactive)	0.10	0.10	0.10
Stock-Level	0.10	0.10	0.10
Keying/Think Times (in seconds)			
New-Order	18.02/0.00	18.03/12.05	18.60/120.33
Payment	3.02/0.00	3.03/12.04	3.60/120.34
Order-Status	2.02/0.00	2.03/10.04	2.47/100.33
Delivery (interactive)	2.02/0.00	2.03/5.05	2.54/50.33
Stock-Level	2.02/0.00	2.03/5.05	2.59/50.33
Test Duration			
Ramp-up time			98 minutes
Measurement interval			120 minutes
Transactions (all types) completed during measurement interval			160,999,603
Ramp down time			2 minutes
Checkpointing			
Number of checkpoints			4
Checkpoint interval			30 minutes

General Items

Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

Application Code and Definition Statements

The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.

Appendix A contains all source code implemented in this benchmark.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

This requirement can be satisfied by providing a full list of all parameters.

Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagram for both the tested and priced systems are included on the following page.

Figure 1. Benchmarked Configuration


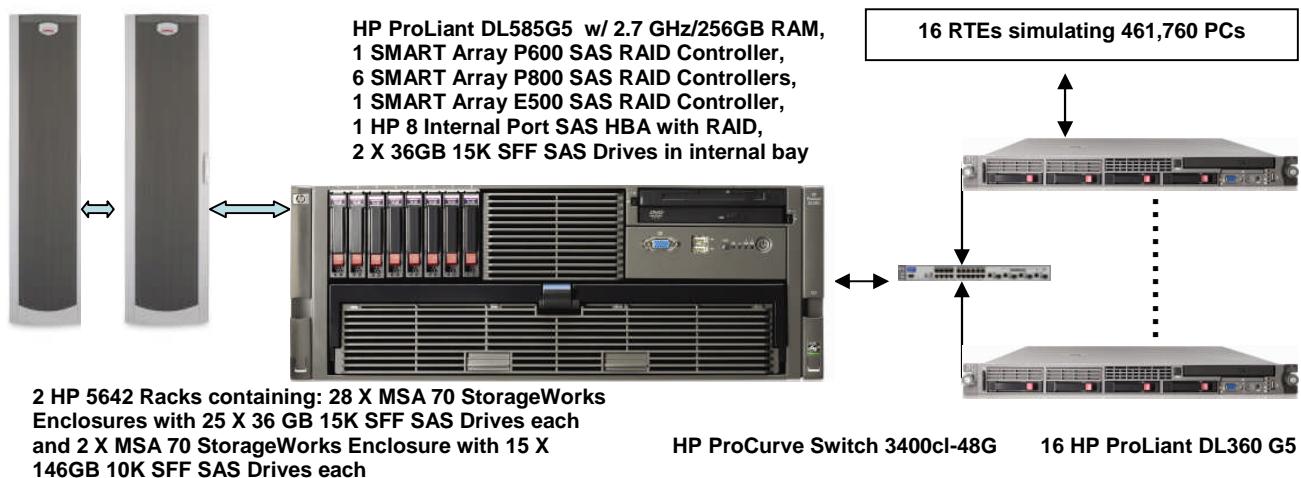


Figure 1. Priced Configuration

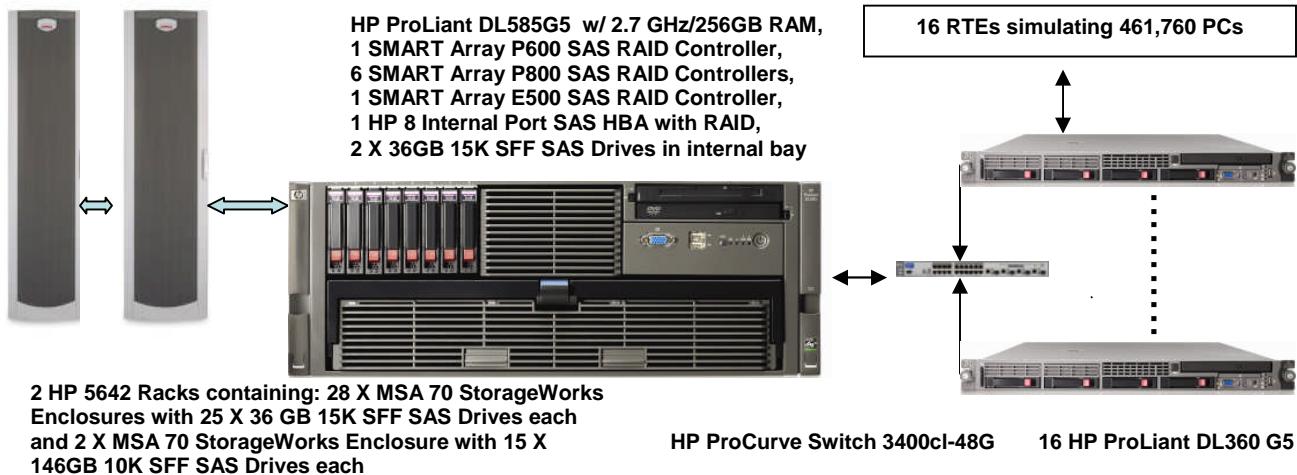

Clause 1 Related Items

Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of 700 drives at 36GB for database data, two 36GB drives for the operating system, and 30 drives at 146GB for database log. There were 600 X 36GB drives for database data on 6 SMART P800 controllers, 100 X 36GB drives for database data on 1 SMART E500 controller, 30 X 146 GB drives on the SMART P600 controller for database log, and 2 X 36GB drives on the 8 Internal Port SAS HBA for the operating system.

Benchmarked Configuration:

8 Internal Port SAS HBA, Slot 1, Array A

<u>LOGICAL DRIVE C:</u>	<u>Total Capacity = 33.51 GB</u>	<u>RAID 0</u>
Microsoft Windows Server R2 2003 Enterprise X64 Edition		

SMART- P600 Controller, Slot 2, Array A

<u>LOGICAL DRIVE E:</u>	<u>Total Capacity = 1953.12 GB</u>	<u>RAID 0+1</u>
MSSQL_tpcc_log_1		

<u>LOGICAL DRIVE F:</u>	<u>Total Capacity = 97.39 GB</u>	<u>RAID 0+1</u>
MSSQL_tpcc_log_2		

SMART-P800 Controller, Slot 3A, Array A

<u>LOGICAL DRIVE C:\stk\stk1:</u>	<u>Total Capacity = 273.43GB</u>	<u>RAID 0</u>
stk_fg		
<u>LOGICAL DRIVE C:\cs\cs1:</u>	<u>Total Capacity = 205.08GB</u>	<u>RAID 0</u>
cs_fg		
<u>LOGICAL DRIVE C:\ol\ol1:</u>	<u>Total Capacity = 224.60GB</u>	<u>RAID 0</u>
ol_fg		
<u>LOGICAL DRIVE C:\misc\misc1:</u>	<u>Total Capacity = 58.59GB</u>	<u>RAID 0</u>
Misc_fg		
<u>LOGICAL DRIVE U:</u>	<u>Total Capacity = 1313.47GB</u>	<u>RAID 0+1</u>
Tpccback1		

SMART-P800 Controller, Slot 4A, Array A

<u>LOGICAL DRIVE C:\stk\stk2:</u>	<u>Total Capacity = 273.43GB</u>	<u>RAID 0</u>
stk_fg		
<u>LOGICAL DRIVE C:\cs\cs2:</u>	<u>Total Capacity = 205.08GB</u>	<u>RAID 0</u>
cs_fg		
<u>LOGICAL DRIVE C:\ol\ol2:</u>	<u>Total Capacity = 224.60GB</u>	<u>RAID 0</u>
ol_fg		
<u>LOGICAL DRIVE C:\misc\misc2:</u>	<u>Total Capacity = 58.59GB</u>	<u>RAID 0</u>
Misc_fg		
<u>LOGICAL DRIVE V:</u>	<u>Total Capacity = 1313.47GB</u>	<u>RAID 0+1</u>
Tpccback2		

SMART-P800 Controller, Slot 5A, Array A

<u>LOGICAL DRIVE C:\stk\stk3:</u> stk_fg	<u>Total Capacity = 273.43GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cs\cs3:</u> cs_fg	<u>Total Capacity = 205.08GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol3:</u> ol_fg	<u>Total Capacity = 224.60GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc3:</u> Misc_fg	<u>Total Capacity = 58.59GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE W:</u> Tpccback3	<u>Total Capacity = 1313.47GB</u>	<u>RAID 0+1</u>

SMART-P800 Controller, Slot 6A, Array A

<u>LOGICAL DRIVE C:\stk\stk4:</u> stk_fg	<u>Total Capacity = 273.43GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cs\cs4:</u> cs_fg	<u>Total Capacity = 205.08GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol4:</u> ol_fg	<u>Total Capacity = 224.60GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc4:</u> Misc_fg	<u>Total Capacity = 58.59GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE X:</u> Tpccback4	<u>Total Capacity = 1313.47GB</u>	<u>RAID 0+1</u>

SMART-P800 Controller, Slot 7A, Array A

<u>LOGICAL DRIVE C:\stk\stk5:</u> stk_fg	<u>Total Capacity = 273.43GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cs\cs5:</u> cs_fg	<u>Total Capacity = 205.08GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol5:</u> ol_fg	<u>Total Capacity = 224.60GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc5:</u> Misc_fg	<u>Total Capacity = 58.59GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE Y:</u> Tpccback5	<u>Total Capacity = 1313.47GB</u>	<u>RAID 0+1</u>

SMART-P800 Controller, Slot 8A, Array A

<u>LOGICAL DRIVE C:\stk\stk6:</u> stk_fg	<u>Total Capacity = 273.43GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\cs\cs6:</u> cs_fg	<u>Total Capacity = 205.08GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\ol\ol6:</u> ol_fg	<u>Total Capacity = 224.60GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\misc\misc6:</u> Misc_fg	<u>Total Capacity = 58.59GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE Z:</u> Tpccback6	<u>Total Capacity = 1313.47GB</u>	<u>RAID 0+1</u>

SMART-E500 Controller, Slot 9, Array A

<u>LOGICAL DRIVE C:\stk\stk7:</u>	<u>Total Capacity = 273.43GB</u>	<u>RAID 0</u>
stk_fg		
<u>LOGICAL DRIVE C:\cs\cs7:</u>	<u>Total Capacity = 205.08GB</u>	<u>RAID 0</u>
cs_fg		
<u>LOGICAL DRIVE C:\ol\ol7:</u>	<u>Total Capacity = 224.60GB</u>	<u>RAID 0</u>
ol_fg		
<u>LOGICAL DRIVE C:\misc\misc7:</u>	<u>Total Capacity = 58.59GB</u>	<u>RAID 0</u>
Misc_fg		

Priced Configuration vs. Measured Configuration:

The benchmarked configuration and priced configuration were the same.

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.

All insert and delete functions were fully operational during the entire benchmark.

Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

No partitioning was used in this benchmark.

Replication, Duplication or Additions

Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.

No replications, duplications or additional attributes were used in this benchmark.

Clause 2 Related Items

Random Number Generation

The method of verification for the random number generation must be described.

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none was found.

Input/Output Screen Layout

The actual layout of the terminal input/output screens must be disclosed.

All screen layouts followed the specifications exactly.

Priced Terminal Feature Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

Presentation Manager or Intelligent Terminal

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.

Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

Table 2.1 Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.00%
Order Status	Accessed by last name	60.05%
Transaction Mix	New Order	44.95%
	Payment	43.02%
	Order status	4.01%
	Delivery	4.01%
	Stock level	4.01%

Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

Clause 3 Related Items

Transaction System Properties (ACID)

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

All ACID property tests were successful. The executions are described below.

Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

Consistency

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included a checkpoint.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

Durable Media Failure

Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed. This test was executed on a fully scaled database of 46176 warehouses of which 4620 were used under a load of 46200 users.

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTEs were started with 46200 users.
- The test was allowed to run for a minimum of 5 minutes.
- One disk was removed from one of the MSA 70 cabinets containing the log disks.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the user's status on the RTE.
- One of the data disks was removed from one MSA 70 data drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down, and a database transaction log dump was taken.
- Microsoft SQL Server was shutdown, and the system rebooted after replacing the pulled drives with new drives.
- After the RAID recovery process finished Microsoft SQL Server was started.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in steps 12 and 13 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Instantaneous Interruption and Loss of Memory

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 46176 warehouses under a full load of 461760 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 461760 users.
- The test was allowed to run for a minimum of 5 minutes.
- Pulling the power cords from the SUT induced system crash and loss of memory. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was paused then stopped.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 9 and 10 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Clause 4 Related Items

Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

Table 4.1 Number of Rows for Server

Table	Cardinality as built
Warehouse	46,176
District	461,760
Customer	1,385,280,000
History	1,385,280,000
Orders	1,385,280,000
New Order	415,584,000
Order Line	13,852,756,594
Stock	4,617,600,000
Item	100,000
Unused Warehouses	0

Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 700 SAS drives at 36GB for database data, two 36GB SAS drive for the operating system, and 30 SAS drives at 146GB for database log. Six SMART P800 controllers connected to 2 MSA70 drive boxes for each of two ports. Each MSA70 contained (25) 36GB SAS drives. Both ports were configured as one array. The array was configured with 4 RAID 0 logical drives for data and a RAID 0+1 logical drive for database backup files. One SMART E500 controller was connected to 2 MSA70 drive boxes for each of two ports configured as one array. The array was configured with 4 RAID 0 logical drives for data. The SMART P600 controller was connected to 2 MSA70 drive boxes which contained 15 X 146GB SAS drives each with both configured as a RAID 0+1 logical drive. The Array Accelerators on the data controllers were disabled. The SMART P600 controller had cache disabled for the transaction log. All RAID volumes used hardware RAID. The 8 Internal Port SAS HBA was connected to the internal drive cage with 2 X 36GB drives for the operating system.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the file groups and tables is included in Appendix B.

Type of Database

A statement must be provided that describes:

- *The data model implemented by DBMS used (e.g. relational, network, hierarchical).*
- *The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/1, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2005 Enterprise x64 Edition is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

Database Mapping

The mapping of database partitions/replications must be explicitly described.

The database was not replicated.

60 Day Space

Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using *dbcc sqlperf(logspace)*.
- Transactions were run against the database with a full load of users.
- The free space was again queried using *dbcc sqlperf(logspace)*.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the sum(d_next_o_id) taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

Details of both the 8-hour transaction log space requirements and the 60-day space requirements are shown in Appendix D.

Clause 5 Related Items

Throughput

Measured tpmC must be reported

Measured tpmC 579,814tpmC
Price per tpmC USD \$0.96

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.

Table 5.2: Response Times

Type	Average	90 th %	Maximum
New-Order	0.31	0.57	8.56
Payment	0.28	0.54	5.09
Order-Status	0.32	0.57	9.43
Interactive Delivery	0.12	0.14	3.48
Deferred Delivery	0.14	0.19	5.00
Stock-Level	0.33	0.59	4.66
Menu	0.13	0.15	3.50

Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 5.3: Keying Times

Type	Minimum	Average	Maximum
New-Order	18.02	18.03	18.60
Payment	3.02	3.03	3.60
Order-Status	2.02	2.03	2.47
Interactive Delivery	2.02	2.03	2.54
Stock-Level	2.02	2.03	2.59

Table 5.4: Think Times

Type	Minimum	Average	Maximum
New-Order	0.00	12.05	120.33
Payment	0.00	12.04	120.34
Order-Status	0.00	10.04	100.33
Interactive Delivery	0.00	5.05	50.33
Stock-Level	0.00	5.05	50.33

Response Time Frequency Distribution Curves and Other Graphs

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.

Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 3. New Order Response Time Distribution

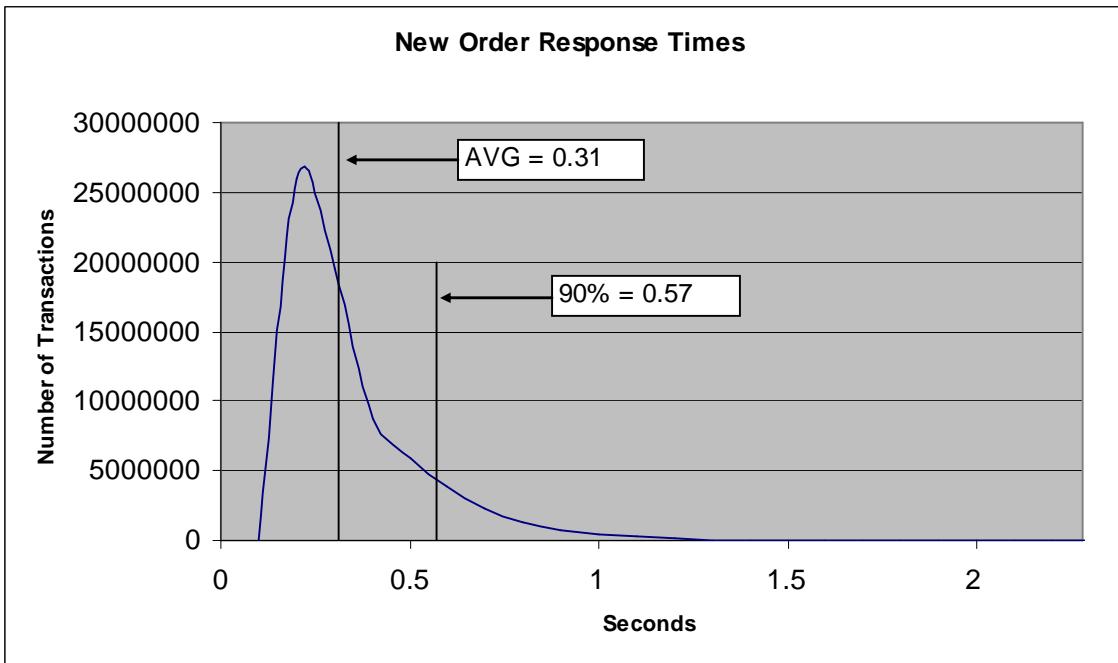


Figure 4. Payment Response Time Distribution

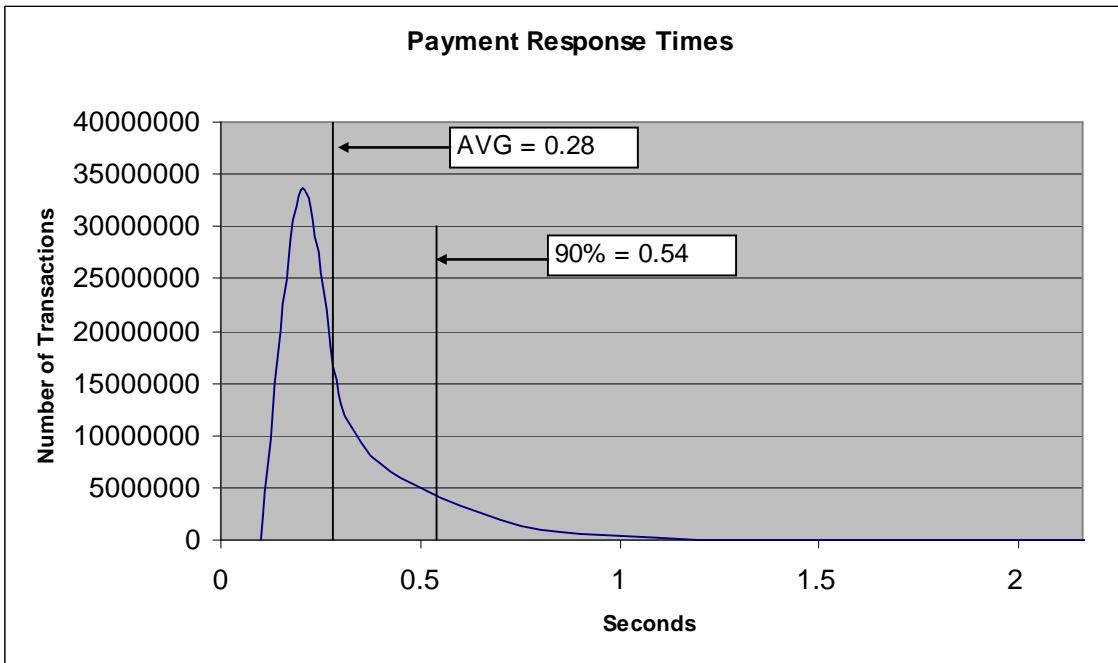


Figure 5. Order Status Response Time Distribution

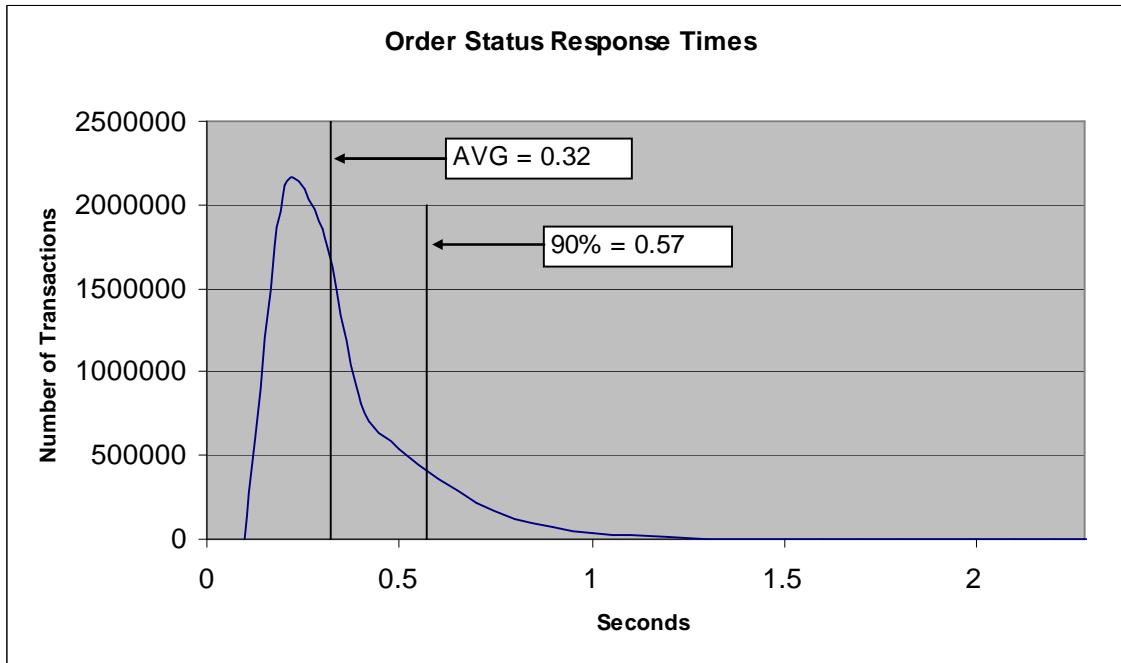


Figure 6. Delivery Response Time Distribution



Figure 7. Stock Level Response Time Distribution

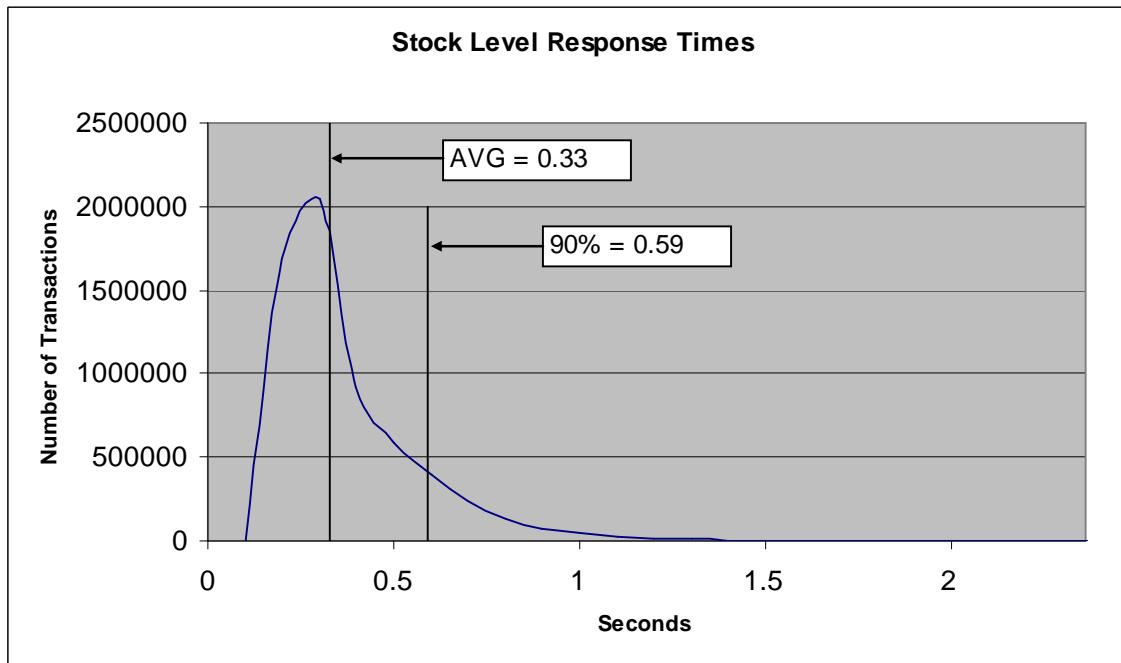


Figure 8. Response Time vs. Throughput

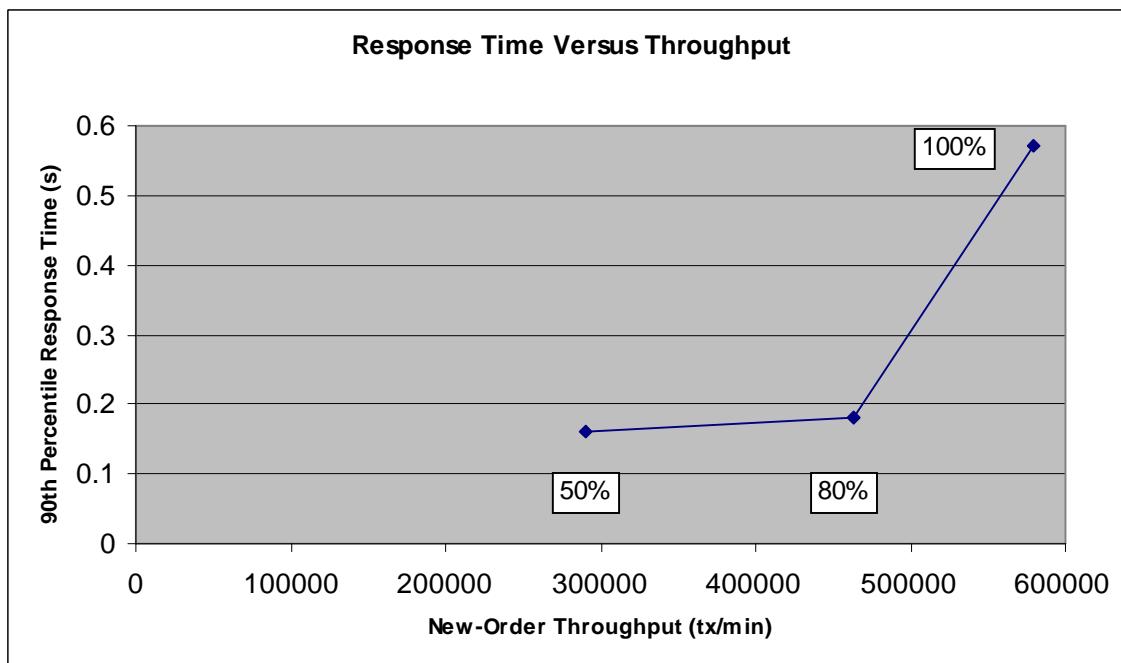


Figure 9. New Order Think Time Distribution


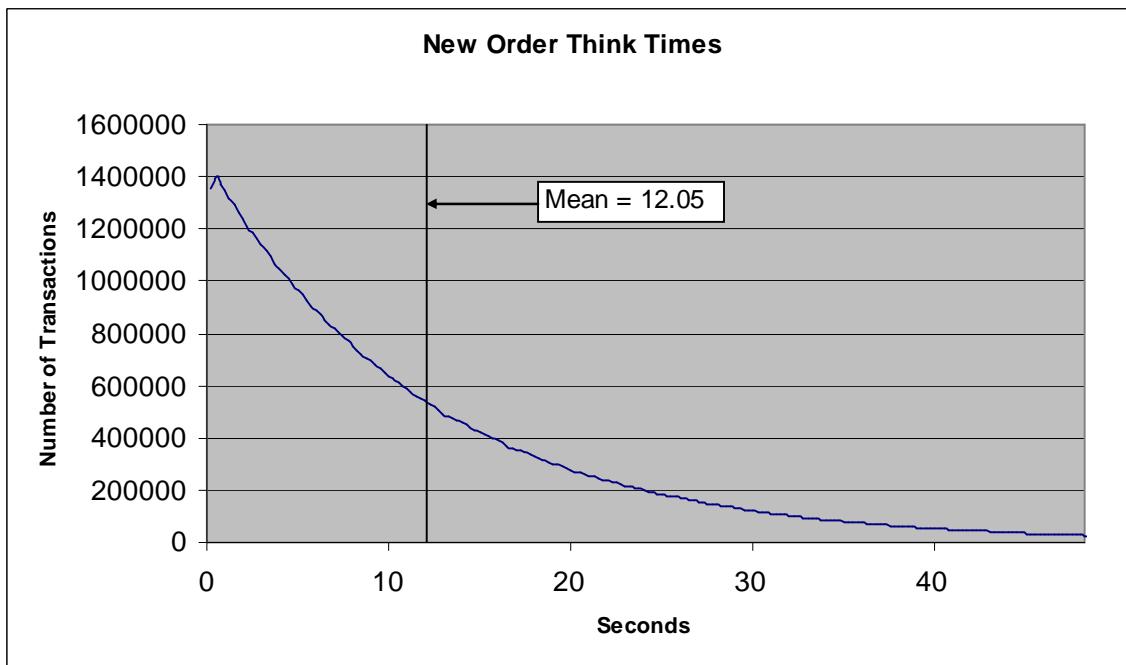


Figure 10. Throughput vs. Time Distribution

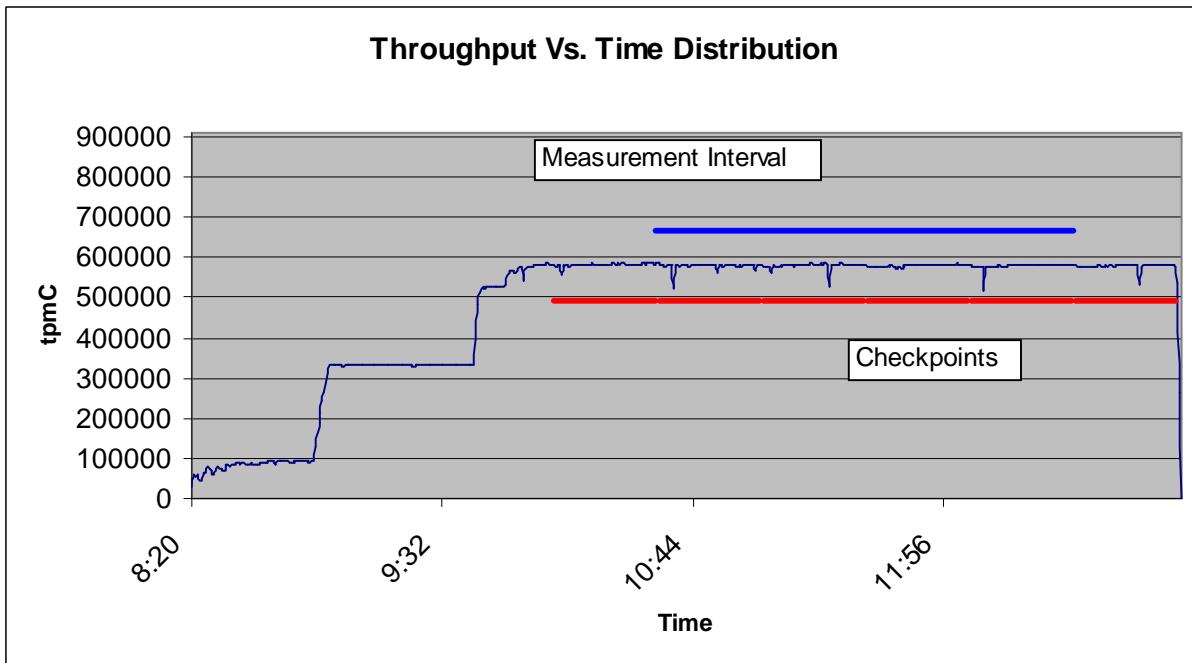

Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The input screen for the requested transaction was returned and timestamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over gigabit Ethernet LANs using ODBC and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 32767 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes. The measurement interval was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 9.

Measurement Period Duration

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The reported measured interval was exactly 120 minutes long.

Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution, which was not adjusted during the run.

Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

Table 5.5: Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.00%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	60.05%
Transaction Mix	New Order	44.95%
	Payment	43.02%
	Order status	4.01%
	Delivery	4.01%
	Stock level	4.01%

Checkpoint Count and Location

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

The initial checkpoint was started 104 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. Each checkpoint in the measurement interval lasted 28 minutes and 45 seconds. The measurement interval contains four checkpoints.

Checkpoint Duration

The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.

Checkpoint Start Time	Duration
10:34:17 AM	28 minutes, 45 seconds
11:04:14 AM	28 minutes, 45 seconds
11:34:11 AM	28 minutes, 45 seconds
12:04:08 PM	28 minutes, 45 seconds

Clause 6 Related Items

RTE Descriptions

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input is listed in Appendix A.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

The driver system consisted of 16 HP ProLiant servers. These driver machines emulated the users' web browsers.

Functional Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

Networks

The network configuration of both the tested services and proposed (target) services that are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.

The bandwidth of the networks used in the tested/priced configuration must be disclosed.

In the tested configuration, the driver (RTE) machines were connected through a gigabit Ethernet switch to the client machines at 1Gbps, thus providing the path from the RTEs to the clients. The server (SUT) was connected to the clients through a gigabit Ethernet switch on a separate LAN.

The priced configuration was connected in the same manner as the tested configuration.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 Related Items

System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

• Maximum Qualified Throughput	579,814tpmC
• Price per tpmC	USD \$0.96 per tpmC
• Availability	November 17, 2008

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 16 Microsoft Windows Server R2 2003 Standard Edition SP2
- 1 Microsoft Windows Server R2 2003 Enterprise x64 Edition SP2
- 1 Microsoft SQL Server 2005 Enterprise x64 Edition (per processor) SP2
- 1 Microsoft Visual C++
- HP Servers include 3 years of support.

Clause 9 Related Items

Auditor's Report

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.
PO Box 984
Klamath CA 95548
(phone) 707-482-0523
(fax) 707-482-0575
e-mail: lornaL@perfmetrics.com

Availability of the Full Disclosure Report

The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

TPC
Presidio of San Francisco
Building 572B Ruger St. (surface)
P.O. Box 29920 (mail)
San Francisco, CA 94129-0920

or

Hewlett-Packard Company
Database Performance Engineering
P.O. Box 692000
Houston, TX 77269-2000



PERFORMANCE METRICS INC. TPC Certified Auditors

Mr. David Adams
Database Performance Engineer
Hewlett-Packard Company
20555 SH 249
Houston, TX 77070

October 30, 2008

I have verified by remote the TPC Benchmark™ C for the following configuration:

Platform: HP ProLiant DL585 G5
Database Manager: Microsoft SQL Server 2005 Enterprise X64 Edition
Operating System: Microsoft Windows 2003 Server R2 Enterprise X64 Edition
Transaction Monitor: Microsoft COM+

System Under Test:				
CPU's	Memory	Disks (total)	90% Response	TpmC
4 AMD 4 core @ 2.71 Ghz	Main: 256 GB	702 @ 36 GB 30 @ 146 GB	0.57	579,814
Clients: 16 DL360 G5				
1 Intel quad core @ 2.83 Ghz	1 GB	2 @ 36 GB	NA	NA

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized.
- The database was properly scaled with 46,176 warehouses, all of which were active during the measured interval.
- The ACID properties were successfully demonstrated.
- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 days space calculation was verified.
- The steady state portion of the test was 120 minutes.
- There was one complete checkpoint in steady state before the measured interval.
- There were 4 checkpoints started and completed inside the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.

Auditor Notes: None

Sincerely,

A handwritten signature in black ink that reads "Lorna Livingtree".

Lorna Livingtree, Certified Auditor

Appendix A: Source Code

The client source code is listed below.

dlldata.c

```
*****  
Dlldata file -- generated by MIDL compiler  
  
DO NOT ALTER THIS FILE  
  
This file is regenerated by MIDL on every IDL file  
compile.  
  
To completely reconstruct this file, delete it and  
rerun MIDL  
on all the IDL files in this DLL, specifying this  
file for the  
/dlldata command line option  
*****  
*****  
  
#include <rpcproxy.h>  
  
#ifdef __cplusplus  
extern "C" {  
#endif  
  
EXTERN_PROXY_FILE( tpcc_com_ps )  
  
PROXYFILE_LIST_START  
/* Start of list */  
REFERENCE_PROXY_FILE( tpcc_com_ps ),  
/* End of list */  
PROXYFILE_LIST_END  
  
DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )  
  
#ifdef __cplusplus  
} /*extern "C" */  
#endif  
  
/* end of generated dlldata file */
```

error.h

```
/* FILE: ERROR.H Microsoft  
TPC-C Kit Ver. 4.20.000 Copyright  
Microsoft, 1999  
* All Rights Reserved  
* Version  
4.10.000 audited by Richard Gimarc, Performance  
Metrics, 3/17/99  
*  
* PURPOSE: Header file for error exception  
classes.  
*  
* Change history:  
* 4.20.000 - updated rev number to  
match kit  
* 4.21.000 - fixed bug: ~CBaseErr  
needed to be declared virtual  
*/  
  
#pragma once  
  
#ifndef _INC_STRING  
#include <string.h>  
#endif  
  
const int m_szMsg_size = 512;  
const int m_szApp_size = 64;  
const int m_szLoc_size = 64;  
  
//error message structure used in ErrorText routines  
typedef struct _SERRORMSG  
{  
    int iError;  
    //error id of message  
    char szMsg[256];  
    //message to sent to browser  
} SERRORMSG;  
  
typedef enum _ErrorLevel  
{  
    ERR_FATAL_LEVEL = 1,  
    ERR_WARNING_LEVEL = 2,  
    ERR_INFORMATION_LEVEL = 3  
} ErrorLevel;  
  
#define ERR_TYPE_LOGIC -1  
//logic error in program; internal error  
#define ERR_SUCCESS 0  
//success (a non-error error)  
#define ERR_BAD_ITEM_ID 1  
//expected abort record in txnRecord
```

```
#define ERR_TYPE_DELIVERY_POST 2  
//expected delivery post failed  
#define ERR_TYPE_WEBDLL 3  
//tpcc web generated error  
#define ERR_TYPE_SQL 4  
//sql server generated error  
#define ERR_TYPE_DBLIB 5  
//dblib generated error  
#define ERR_TYPE_ODBC 6  
//odbc generated error  
#define ERR_TYPE_SOCKET 7  
//error on communication socket client rte  
only  
#define ERR_TYPE_DEADLOCK 8  
//dblib and odbc only deadlock condition  
#define ERR_TYPE_COM 9  
//error from COM call  
#define ERR_TYPE_TUXEDO 10  
//tuxedo error  
#define ERR_TYPE_OS 11  
//operating system error  
#define ERR_TYPE_MEMORY 12  
//memory allocation error  
#define ERR_TYPE_TPCC_ODBC 13  
//error from tpcc odbc txn module  
#define ERR_TYPE_TPCC_DBLIB 14  
//error from tpcc dblib txn module  
#define ERR_TYPE_DELISRV 15  
//delivery server error  
#define ERR_TYPE_TXNLOG 16  
//txn log error  
#define ERR_TYPE_BCCONN 17  
//Benchcraft connection class  
#define ERR_TYPE_TPCC_CONN 18  
//Benchcraft connection class  
#define ERR_TYPE_ENCINA 19  
//Encina error  
#define ERR_TYPE_COMPONENT 20  
//error from COM component  
#define ERR_TYPE_RTE 21  
//Benchcraft rte
```

```

#define ERR_TYPE_AUTOMATION          22
    //Benchcraft automation errors
#define ERR_TYPE_DRIVER              23
    //Driver engine errors
#define ERR_TYPE_RTE_BASE             24
    //Framework errors
#define ERR_BUF_OVERFLOW               25
    //Buffer overflow during receive
#define ERR_TYPE_SOAP_HTTP              26
    //HTTP/SOAP dll generated error
#define ERR_TYPE_OLEDB                  27
    //OLE-DB generated error
#define ERR_TYPE_TPCC_OLEDB                28
    //error from tpcc ole-db txn module
// TPC-W error types
#define ERR_TYPE_TPCW_CONN                 50
    //Benchcraft connection class
#define ERR_TYPE_TPCW_HTML                  51
    //error from TpcwHtml dll
#define ERR_TYPE_TPCW_USER                  52
    //error from TPC-W user class
#define ERR_TYPE_TPCW_ENG_BASE                53
#define ERR_TYPE_TPCW_ENG_OS                  54
#define ERR_TYPE_HTML_RESP                  55
#define ERR_TYPE_TPCW_ODBC                  56
#define ERR_TYPE_SCHANNEL                  57
#define ERR_TYPE_THINK_LIST                  58
//----- end TPC-W -----
#define ERR_TYPE_XML_PROFILE                 59
// TPC-E error types
#define ERR_TYPE_TPCE_CONN                  60
    //TPC-E pipe connection errors
#define ERR_TYPE_TPCE RTE                  61
    //TPC-E Rte errors
#define ERR_TYPE_TPCE_ENG_BASE                62
    //Tpce Driver engine errors
#define ERR_TYPE_TPCE_ENG_OS                  63
    //Tpce Driver
engine system errors
//#define ERR_TYPE_TPCE_MEE_ENG_BASE            64
    //Tpce MEE
Driver engine errors

```

```

##define ERR_TYPE_TPCE_MEE_ENG_OS          65
    //Tpce MEE
Driver engine system errors

#define ERR_INS_MEMORY
    "Insufficient Memory to continue."
#define ERR_UNKNOWN
    "Unknown error."
#define ERR_MSG_BUF_SIZE                  512
#define INV_ERROR_CODE                   -1
#define ERR_INS_BUF_OVERFLOW      "Insufficient Buffer
size to receive HTML pages."

class CBaseErr
{
public:
    enum Action
    {
        eNone = 0
    };

    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg = GetLastErrorMessage(); //take the error code
immediately before it is reset by other functions

        if (szLoc)
        {
            m_szLoc = new char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
    }

    m_szApp = new char[m_szApp_size];
    GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
}

CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
{
    m_idMsg = idMsg;

    if (szLoc)
    {
        m_szLoc = new char[strlen(szLoc)+1/*m_szLoc_size*/];
        strcpy(m_szLoc, szLoc);
    }
    else
        m_szLoc = NULL;
}


```

```

m_szApp = new
char[m_szApp_size];
GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
}

virtual ~CBaseErr(void)
{
    if (m_szApp)
        delete [] m_szApp;
    if (m_szLoc)
        delete [] m_szLoc;
}

virtual void Draw(HWND hwnd, LPCTSTR szStr
= NULL)
{
    int j = 0;
    char szTmp[512];
    if (szStr)
        j = wsprintf(szTmp,
"%s\n", szStr);
    if (ErrorNum() != INV_ERROR_CODE)
        j += wsprintf(szTmp+j,
"Error = %d\n", ErrorNum());
    if (m_szLoc)
        j += wsprintf(szTmp+j,
"Location = %s\n", GetLocation());
    j += wsprintf(szTmp+j, "%s\n",
ErrorText());
    MessageBox(hwnd, szTmp, m_szApp,
MB_OK);
}

char *GetApp(void) { return m_szApp; }
char *GetLocation(void) { return m_szLoc; }
virtual int ErrorNum() { return m_idMsg; }

virtual int ErrorType() = 0; // a value
which distinguishes the kind of error that occurred
virtual char *ErrorTypeStr() = 0; // text
representation of the error type
virtual char *ErrorText() = 0; // a string
(i.e., human readable) representation of the error
virtual int ErrorAction() { return eNone; }
// the function call that caused the error

protected:
    char *m_szApp;
    char *m_szLoc; // code location where
the error occurred
    int m_idMsg;
    //short m_errType;
};


```

```

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eSend,
        eSocket,
        eBind,
        eConnect,
        eListen,
        eHost,
        eRecv,
        eGetHostByName,
        eWSACreateEvent,
        eWSASend,
        eWSAGetOverlappedResult,
        eWSARecv,
        eWSAWaitForMultipleEvents,
        eWSAStartup,
        eWSAResetEvent,
        eWSAEnumNetworkEvents,
        eWSAEventSelect,
        eSelect,
        eAccept,
        eNonRetryable
    };
};

CSocketErr(Action eAction, LPCTSTR
szLocation = NULL);

~CSocketErr()
{
    if (m_szErrorText != NULL)
        delete []
}

m_szErrorText;
};

Action m_eAction;
char *m_szErrorText;

int ErrorType() { return
ERR_TYPE_SOCKET; };
char* ErrorTypeStr() { return "SOCKET";
}

char* ErrorText(void);
int ErrorAction() { return
(int)m_eAction; }

class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadfile = 10,
        eWritefile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        ebeginthread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
        eRegisterClassEx,
        eCreateWindow,
        eCreateSemaphore,
        eReleaseSemaphore,
        eFSSeek,
        eFRead,
        eFWrite,
        eTmpFile,
        eSetFilePointer,
        eNew,
        eCloseHandle,
        eGetOverlappedResult
    };
};

CSystemErr(Action
eAction, LPCTSTR szLocation);
CSystemErr(int iError,
Action eAction, LPCTSTR szLocation);
int ErrorType() { return
ERR_TYPE_OS; };
char* ErrorTypeStr() { return "SYSTEM";
}

char* ErrorText(void);
int ErrorAction() { return
(int)m_eAction; }
void Draw(HWND hwnd, LPCTSTR szStr =
NULL);

Action m_eAction;

private:
    char m_szMsg[ERR_MSG_BUF_SIZE];
};

class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr();
    int ErrorType() { return
ERR_TYPE_MEMORY; };
    char* ErrorTypeStr() { return "OUT OF
MEMORY"; }
};

char* ErrorText() { return
ERR_INS_MEMORY; }

class CBufferOverflowErr : public CBaseErr
{
public:
    CBufferOverflowErr(int,LPTSTR);

    int ErrorType() { return
ERR_BUF_OVERFLOW; };
    char* ErrorTypeStr() { return "BUFFER
OVERFLOW"; };
    char* ErrorText() { return
ERR_INS_BUF_OVERFLOW; }

// Exception type for XML profiles
class CXMLProfileErr : public CBaseErr
{
public:
    enum Action
    {
        LoadProfile = 1,
        LoadSchema,
        ValidateProfile,
        SaveProfile,
        LoadFromXML,
        SaveToXML,
        ApplyProcessingInstruction,
        ApplyAttribute,
        ApplyNode
    };

    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        m_bOverload = true;
    };
    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation, char * szMsg)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        strcpy(m_szMsg, szMsg);
        m_bOverload = false;
    };

    virtual int
    ErrorType() { return
ERR_TYPE_XML_PROFILE; };
    virtual char
    *ErrorTypeStr() { return "XML PROFILE"; };
    virtual char
    *ErrorText();

    virtual int
    ErrorCode() { return m_eCode; };
    int
    ErrorAction() { return (int)m_eAction; }
};

```

```

        //virtual void      Draw(HWND
hwnd, LPCTSTR szStr = NULL)
        //{
        //      ::MessageBox(hwnd,
szStr, m_szLoc, MB_OK);
        //}

private:
    char
m_szMsg[ERR_MSG_BUF_SIZE];
    LPCTSTR m_szLoc;
    int          m_eCode;
    bool         m_bOverload;
    Action       m_eAction;
};


```

install.c

```

/*      FILE:           INSTALL.C
*      Microsoft
TPC-C Kit Ver. 4.51.000
*      Copyright
Microsoft, 2003
*          All Rights Reserved
*
*          not audited
*
*      PURPOSE: Automated installation
application for TPC-C Web Kit
*      Contact: Charles Levine
(clevine@microsoft.com)
*
*      Change history:
*          4.20.000 - added COM installation
steps
*          4.50.000 - added IIS6 configuration options
*          4.51.000 - added routines to copy
Visual Studio runtime module (MSVCR70.DLL)
*
SystemRoot\System32
*/
#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <tchar.h>
#include <stdio.h>
#include <commctrl.h>
#include "...\\common\\src\\ReadRegistry.h"
#include <process.h>

#include "resource.h"

#define WM_INITTEXT           WM_USER+100
HICON                  hIcon;
HINSTANCE   hInst;
DWORD                 versionExeMS;
DWORD                 versionExeLS;

```

```

DWORD             versionExeMM;
DWORD             versionDllMS;
DWORD             versionDllLS;

// TPC-C registry settings
TPCCREGISTRYDATA Reg;

static  int          iPoolThreadLimit;
static  int          iMaxPoolThreads;
static  int          iThreadTimeout;
static  int          iListenBackLog;
static  int          iAcceptExOutstanding;
static  int          iUriEnableCache;
static  int          iUriScavengerPeriod;
static  int          iMaxConnections;

static  int          iIISMajorVersion;
static  int          iNumberOfProcessors;

static  int          iMaxPhysicalMemory;
//max physical memory in MB
static  char         szLastFileName[64];           // last file we worked on (for error reporting)

BOOL     CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL     CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL     CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL     CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
static void          ProcessOK(HWND hwnd, char *szDllPath, char *szWindowsPath);
static void          ReadRegistrySettings(void);
static void          WriteRegistrySettings(char *szDllPath);
static BOOL          RegisterDLL(char *szFileName);
static int           CopyFiles(HWND hDlg, char *szDllPath, char *szWindowsPath);
static BOOL          GetInstallPath(char *szDllPath);
static BOOL          GetWindowsInstallPath(char *szWindowsPath);
static void          GetVersionInfo(char *szDLLPath, char *szExePath);
static BOOL          CheckWWWWebService(void);
static BOOL          StartWWWWebService(void);
static BOOL          StopWWWWebService(void);
static void          UpdateDialog(HWND hDlg);
static void          ConfigureIIS6(HWND hwnd, HWND hDlg);
SYSTEM_INFO siSysInfo;
BOOL install_com(char *szDllPath);

```

```

#include "...\\common\\src\\ReadRegistry.cpp"

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE hPrevInstance, LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;
    HInst = hInstance;
    InitCommonControls();
    hIcon = LoadIcon(hInstance, MAKEINTRESOURCE(IDI_ICON1));
    iRc = DialogBox(hInstance, MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(), LicensedDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance, MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(), MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance, MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(), UpdatedDlgProc, (LPARAM)iRc);
        }
        DestroyIcon(hIcon);
        return 0;
    }

    BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
    {
        HGLOBAL          hRes;
        HRSRC            hResInfo;
        BYTE             *pSrc, *pDst;
        DWORD            dwSize;
        static HFONT      hFont;
        switch(uMsg)
        {
            case WM_INITDIALOG:
                hFont = CreateFont(-12, 0, 0, 400, 0, 0, 0, 0, 0, 0, 0, 0, "Arial");
                SendMessage(
GetDlgItem(hwnd, IDR_LICENSE1), WM_SETFONT, (WPARAM)hFont, MAKELPARAM(0, 0));
                PostMessage(hwnd, WM_INITTEXT, (WPARAM)0, (LPARAM)0);
                return TRUE;
            case WM_INITTEXT:
                hResInfo =
FindResource(hInst, MAKEINTRESOURCE(IDR_LICENSE1),
"LICENSE");
                dwSize =
SizeofResource(hInst, hResInfo);

```

```

        hRes =
LoadResource(hInst, hResInfo );
        pSrc = (BYTE
*)LockResource(hRes);
        pDst = (unsigned char
*)malloc(dwSize+1);
        if ( pDst )
{
            memcpy(pDst,
pSrc, dwSize);
            pDst[dwSize]
= 0;

            SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pDst);
            free(pDst);
}
        else

            SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
        return TRUE;
    case WM_DESTROY:
        DeleteObject(hFont);
        return TRUE;
    case WM_COMMAND:
        if ( wParam == IDOK )
EndDialog(hwnd, TRUE);
        if ( wParam == IDCANCEL
)
}
        EndDialog(hwnd, FALSE);
        default:
            break;
}
        return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
{
    case WM_INITDIALOG:
        switch(lParam)
{
            case 1:
            case 2:

                SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C
Web Client Installed");
                break;
}
        return TRUE;
    case WM_COMMAND:
        if ( wParam == IDOK )
EndDialog(hwnd, TRUE);
        break;
    default:
        break;
}
}

```

```

        }
        return FALSE;
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFO VI;
    char szTmp[256];
    static char szDllPath[256];
    static char szWindowsPath[256];
    static char szExePath[256];
    switch(uMsg)
{
    case WM_INITDIALOG:
        GlobalMemoryStatus(&memoryStatus);
        iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);
        if (
GetWindowsInstallPath(szWindowsPath) )
{
            MessageBox(hwnd, "Error: Cannot determine
Windows System Root.", NULL, MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, FALSE);
            return TRUE;
}
        if (
GetInstallPath(szDllPath) )
{
            MessageBox(hwnd, "Error internet service
inetsrv is not installed.", NULL, MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, FALSE);
            return TRUE;
}
        // set default values
        ZeroMemory( &Reg,
sizeof(Reg) );
        Reg.dwNumberOfDeliveryThreads = 4;
        Reg.dwMaxConnections =
100;
        Reg.dwMaxPendingDeliveries =
100;
        Reg.eDB_Protocol =
ODBC;
        Reg.eTxnMon = None;
        strcpy(Reg.szDbServer,
"");
}
}

```

```

        strcpy(Reg.szDbName,
"tpcc");
        strcpy(Reg.szDbUser,
"sa");
        strcpy(Reg.szDbPassword, "");
        iPoolThreadLimit =
iMaxPhysicalMemory * 2;
        iThreadTimeout = 86400;
        iListenBackLog = 15;
        iAcceptExOutstanding =
40;

        ReadTPCCRegistrySettings( &Reg );
        ReadRegistrySettings();

        // copy the hardware
information to the SYSTEM_INFO structure

        GetSystemInfo(&siSysInfo);
        // store the number of
processors on this system
        siSysInfo.dwNumberOfProcessors =
siSysInfo.dwNumberOfProcessors;

        GetModuleFileName(hInst, szExePath,
sizeof(szExePath));
        GetVersionInfo(szDllPath, szExePath);

        wsprintf(szTmp,
"Version %d.%2.2d.%3.3d", versionExeMS, versionExeMM,
versionExeLS);
        SetDlgItemText(hwnd,
IDC_VERSION, szTmp);
        SetDlgItemText(hwnd,
IDC_PATH, szDllPath);
        SetDlgItemText(hwnd,
ED_DB_SERVER, Reg.szDbServer);
        SetDlgItemText(hwnd,
ED_DB_USER_ID, Reg.szDbUser);
        SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);
        SetDlgItemText(hwnd,
ED_DB_NAME, Reg.szDbName);
        SetDlgItemInt(hwnd,
ED_THREADS, Reg.dwNumberOfDeliveryThreads, FALSE);
        SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);
        SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);
        SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit,
FALSE);
        SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);
}

```

```

SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);
SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);

        // check OS version
level for COM. Must be at least Windows 2000
VI.dwOSVersionInfoSize
= sizeof(VI);
GetVersionEx( &VI );
if (VI.dwMajorVersion <
5)
{
    HWND hDlg =
GetDlgItem( hwnd, IDC_TM_MTS );
    EnableWindow(
hDlg, 0 ); // disable COM option
if
(Reg.eTxnMon == COM)

    Reg.eTxnMon = None;
}

CheckDlgButton(hwnd,
IDC_TM_NONE, 0);
CheckDlgButton(hwnd,
IDC_TM_MTS, 0);
switch (Reg.eTxnMon)
{
case None:
    CheckDlgButton(hwnd, IDC_TM_NONE, 1);
    case COM:
        break;

    CheckDlgButton(hwnd, IDC_TM_MTS, 1);
    break;
}
return TRUE;
case WM_PAINT:
    if ( IsIconic(hwnd) )
    {
        BeginPaint(hwnd, &ps);
        DrawIcon(ps.hdc, 0, 0, hIcon);
        EndPaint(hwnd, &ps);
        return TRUE;
    }
    break;
case WM_COMMAND:
    if ( HIWORD(wParam) ==
BN_CLICKED )
    {
        switch(
LOWORD(wParam) )
        {
case IDOK:

```

```

ProcessOK(hwnd, szDllPath, szWindowsPath);
return TRUE;
case IDCANCEL:
EndDialog(hwnd, FALSE);
return TRUE;
default:
return FALSE;
}
break;
default:
break;
}
return FALSE;
}

static void ProcessOK(HWND hwnd, char *szDllPath,
char *szWindowsPath)
{
    int d;
    HWND hDlg;
    int rc;
    BOOL bSvcRunning;
    char szFullName[256];
    char szErrTxt[128];

    // Check whether Service Pack 1 has been
installed if
// running on Windows Server 2003. The RTM
version has
// a limitation on the number of concurrent
HTTP connections.
// OSVERSIONINFOEX VersionInfo;
VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
if
(GetVersionEx((LPOSVERSIONINFO)&VersionInfo))
{
    if (VersionInfo.dwMajorVersion ==
5 && // Windows 2000/2003 Server?
        VersionInfo.dwMinorVersion == 2 && // Windows
2003 Server?
        VersionInfo.wServicePackMajor == 0) // Service
Pack installed?
    {
        TCHAR szMsg[256];
        _snprintf(szMsg,
sizeof(szMsg),

```

```

"Warning:
running on Windows Server 2003 without at least
Service Pack 1\n"
"limits the
number of concurrent HTTP connections to around
8000.");
MessageBox(hwnd, szMsg,
_T("Service Pack not Installed"), MB_ICONEXCLAMATION
| MB_OK);
}

// read settings from dialog
Reg.dwNumberOfDeliveryThreads =
GetDlgItemInt(hwnd, ED_THREADS, &d, FALSE);
Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
Reg.dwMaxPendingDeliveries =
GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d, FALSE);

GetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer, sizeof(Reg.szDbServer));
GetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser, sizeof(Reg.szDbUser));
GetDlgItemText(hwnd, ED_DB_PASSWORD,
Reg.szDbPassword, sizeof(Reg.szDbPassword));
GetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName, sizeof(Reg.szDbName));

if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE)
)
    Reg.eTxnMon = None;
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_MTS) )
    Reg.eTxnMon = COM;

iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);

ShowWindow(hwnd, SW_HIDE);
hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
ShowWindow(hDlg, SW_SHOWNA);
UpdateDialog(hDlg);

// check to see if the web services are
running
bSvcRunning = CheckWWWWebService();
if ( bSvcRunning )
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Stopping Web Service.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
}

```

```

        StopWWWebService();
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }

    // write binaries to inetpub\wwwroot
    rc = CopyFiles(hDlg, szDllPath,
szWindowsPath);
    if ( !rc )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "Error(s)
occured when creating " );
        strcat( szErrTxt, szLastFileName );
    }
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// while we have the web services shutdown,
check to see if this
// is IIS6. If it is, then call
ConfigureIIS6
if ( iIISMajorVersion == 6 )
{
    ConfigureIIS6(hwnd, hDlg);
}

//if we stopped service restart it.
if ( bSvcRunning )
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Starting Web Service.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    StartWWWebService();
}

// update registry
SetDlgItemText(hDlg, IDC_STATUS, "Updating
Registry.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
WriteRegistrySettings(szDllPath);

// register com proxy stub
strcpy(szFullName, szDllPath);
strcat(szFullName, "tpcc_com_ps.dll");
if (!RegisterDLL(szFullName))
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error occurred
when registering " );
    strcat( szErrTxt, szFullName );
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
}

```

```

        EndDialog(hwnd, 0);
        return;
    }

    // if using COM
    if (Reg.eTxnMon == COM)
    {
        SetDlgItemText(hDlg, IDC_STATUS,
"Configuring COM.");
        SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        if (install_com(szDllPath))
        {
            ShowWindow(hwnd,
SW_SHOWNA);
            DestroyWindow(hDlg);
            strcpy( szErrTxt,
"Error occured when configuring COM settings.");
            MessageBox(hwnd,
szErrTxt, NULL, MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, 0);
            return;
        }
        Sleep(100);

        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);

        EndDialog(hwnd, rc);
        return;
    }

    static void ReadRegistrySettings(void)
    {
        HKEY      hKey;
        DWORD     size;
        DWORD     type;

        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\InetStp", 0, KEY_READ, &hKey)
== ERROR_SUCCESS )
        {
            size = sizeof(iIISMajorVersion);
            if ( RegQueryValueEx(hKey,
"MajorVersion", 0, &type, (char *)&iIISMajorVersion,
&size) == ERROR_SUCCESS )
                if ( !iIISMajorVersion
)
                    iIISMajorVersion = 5;
            if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param
eters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
                if ( iIISMajorVersion == 6 )
                {

```

```

                    // since IIS6 handles
the pool thread parameters differently, we need to
fill in the dialog
                    // with the
MaxPoolThreads rather than PoolThreadLimit
                    // for ease of coding,
we are just going to stuff the value into
iPoolThreadLimit
                    size = sizeof(iPoolThreadLimit);
                    if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
                        if ( !iPoolThreadLimit
)

                    iPoolThreadLimit = iMaxPhysicalMemory * 2;
                }
                else
                {
                    size =
sizeof(iPoolThreadLimit);
                    if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
                        if ( !iPoolThreadLimit
)

                    iPoolThreadLimit = iMaxPhysicalMemory * 2;
                }
                size = sizeof(iThreadTimeout);
                if ( RegQueryValueEx(hKey,
"ThreadTimeout", 0, &type, (char *)&iThreadTimeout,
&size) == ERROR_SUCCESS )
                    if ( !iThreadTimeout
)

                    iThreadTimeout = 86400;
                size = sizeof(iListenBackLog);
                if ( RegQueryValueEx(hKey,
"ListenBackLog", 0, &type, (char *)&iListenBackLog,
&size) == ERROR_SUCCESS )
                    if ( !iListenBackLog
)

                    iListenBackLog = 15;
                RegCloseKey(hKey);
            }
            if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
            {
                size =
sizeof(iAcceptExOutstanding);
                if ( RegQueryValueEx(hKey,
"AcceptExOutstanding", 0, &type, (char
*)&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
                    if (
!iAcceptExOutstanding
)

                    iAcceptExOutstanding = 40;

```

```

        RegCloseKey(hKey);

    } if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\\Services\HTTP\Parameter
s", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size = sizeof(iUriEnableCache);
        if ( RegQueryValueEx(hKey,
"UriEnableCache", 0, &type, (char *)&iUriEnableCache,
&size) == ERROR_SUCCESS )
            if ( !iUriEnableCache )

        iUriEnableCache = 0;

        size =
sizeof(iUriScavengerPeriod);
        if ( RegQueryValueEx(hKey,
"UriScavengerPeriod", 0, &type, (char *)
&iUriScavengerPeriod, &size) == ERROR_SUCCESS )
            if (
!iUriScavengerPeriod )

        iUriScavengerPeriod = 10800;

        size = sizeof(iMaxConnections);
        if ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (char *)&iMaxConnections,
&size) == ERROR_SUCCESS )
            if ( !iMaxConnections )

        iMaxConnections = 100000;

        RegCloseKey(hKey);
    }

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY hKey;
    DWORD dwDisposition;
    char szTmp[256];
    char *ptr;
    int iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\TPCC", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0,
REG_SZ, szTmp, strlen(szTmp)+1);

        RegSetValueEx(hKey,
"NumberOfDeliveryThreads", 0, REG_DWORD, (char *)
&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));

```

```

        RegSetValueEx(hKey,
"MaxConnections", 0, REG_DWORD, (char *)
&Reg.dwMaxConnections,
sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hKey,
"MaxPendingDeliveries", 0, REG_DWORD, (char *)
&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hKey,
"DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol],
strlen(szDBNames[Reg.eDB_Protocol])+1);
        RegSetValueEx(hKey, "TxnMonitor",
0, REG_SZ, szTxnMonNames[Reg.eTxnMon],
strlen(szTxnMonNames[Reg.eTxnMon])+1);

        RegSetValueEx(hKey, "DbServer",
0, REG_SZ, Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0,
REG_SZ, Reg.szDbName, strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0,
REG_SZ, Reg.szDbUser, strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword",
0, REG_SZ, Reg.szDbPassword,
strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey,
"COM_SinglePool", 0, REG_SZ, szTmp, strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\\Services\Inetinfo\Parameters",
0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        // if this is IIS6, then we need
        // to treat the PoolThreadLimit differently
        // if IIS6, then PoolThreadLimit
        // is the maximum number of threads for the entire
        // system.
        // IIS6 added MaxPoolThreads
        // which controls the number of threads per processor.
        For IIS6
            // we will set MaxPoolThreads to
            the value the user provided in the dialog and then
            set
                // PoolThreadLimit to
                MaxPoolThreads * number of processors on this system
                if ( iIISMajorVersion == 6 )
                {
                    iMaxPoolThreads =
iPoolThreadLimit;
                    iPoolThreadLimit =
iMaxPoolThreads * iNumberOfProcessors;

```

```

        RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char *)
&iPoolThreadLimit, sizeof(iPoolThreadLimit));
        RegSetValueEx(hKey,
"MaxPoolThreads", 0, REG_DWORD, (char *)
&iMaxPoolThreads, sizeof(iMaxPoolThreads));
    }
    else
    {
        RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char *)
&iPoolThreadLimit, sizeof(iPoolThreadLimit));
    }

    RegSetValueEx(hKey,
"ThreadTimeout", 0, REG_DWORD, (char *)
&iThreadTimeout, sizeof(iThreadTimeout));
    RegSetValueEx(hKey,
"ListenBackLog", 0, REG_DWORD, (char *)
&iListenBackLog, sizeof(iListenBackLog));

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\\Services\W3SVC\Parameters",
0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
{
    RegSetValueEx(hKey,
"AcceptExOutstanding", 0, REG_DWORD, (char *)
&iAcceptExOutstanding,
sizeof(iAcceptExOutstanding));

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETRANGE, 0, MAKELPARAM(0, 13));
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC lpDllEntryPoint;

```

```

hLib = LoadLibrary(szFileName);
if ( hLib == NULL )
    return FALSE;
// Find the entry point.
lpDllEntryPoint = GetProcAddress(hLib,
"DllRegisterServer");
if (lpDllEntryPoint != NULL)
{
    return ((*lpDllEntryPoint)() ==
S_OK);
}
else
    return FALSE;      //unable to
locate entry point
}

BOOL FileFromResource( char *szResourceName, int
iResourceId, char *szDllPath, char *szFileName )
{
    HGLOBAL          hDLL;
    HRSRC            hResInfo;
    HANDLE           hFile;
    DWORD            dwSize;
    BYTE             *pSrc;
    DWORD            d;
    char             szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !(hFile = CreateFile(szFullName,
GENERIC_WRITE, 0, NULL, CREATE_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d,
NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath)
{
    SetDlgItemText(hDlg, IDC_STATUS, "Copying
Files... ");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
}

```

```

// install TPCC.DLL
strcpy( szLastFileName, "tpcc.dll" );
if (!FileFromResource( "TPCCDLL",
IDR_TPCCDLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install MSVCR71.DLL
strcpy( szLastFileName, "msvcr71.dll" );
if (!FileFromResource( "MSVCR71",
IDR_MSVC71, szWindowsPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_odbc.dll
strcpy( szLastFileName, "tpcc_odbc.dll" );
if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com.dll
strcpy( szLastFileName, "tpcc_com.dll" );
if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.tlb
strcpy( szLastFileName, "tpcc_com_all.tlb" );
if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_ps.dll
strcpy( szLastFileName, "tpcc_com_ps.dll" );
if (!FileFromResource( "COM_PS_DLL",
IDR_COMPSPS_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.dll
strcpy( szLastFileName, "tpcc_com_all.dll" );
if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))
    return 0;

```

```

    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY  hKey;
    BYTE   szData[256];
    DWORD  sv;
    BOOL   bRc;
    int    len;
    int    iRc;

    // Registry key
    HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\InetStp\PathWWW
Root is used to find the
    // IIS default web site directory and
determine that IIS is installed.

szDllPath[0] = 0;
bRc = TRUE;
if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\InetStp", 0, KEY_ALL_ACCESS,
&hKey) == ERROR_SUCCESS )
{
    sv = sizeof(szData);
    iRc = RegQueryValueEx( hKey,
"PathWWWRoot", NULL, NULL, szData, &sv ); // used by
IIS 5.0 & 6.0
    if (iRc == ERROR_SUCCESS)
    {
        bRc = FALSE;
        strcpy(szDllPath,
szData);
        len =
strlen(szDllPath);
        if ( szDllPath[len-1]
!= '\\' )
        {
            szDllPath[len] = '\\';
            szDllPath[len+1] = 0;
        }
        RegCloseKey(hKey);
    }
    return bRc;
}

static BOOL GetWindowsInstallPath(char
*szWindowsPath)

```

```

{
    HKEY hKey;
    BYTE    szData[256];
    DWORD   sv;
    BOOL    bRc;
    int     len;
    int     iRc;

    // Registry key
    HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows
    NT\CurrentVersion\SystemRoot is used to find the
    // system root to install the VC70 DLL.

    szWindowsPath[0] = 0;
    bRc = TRUE;
    if (RegOpenKeyEx(HKEY_LOCAL_MACHINE,
        "SOFTWARE\Microsoft\Windows NT\CurrentVersion", 0,
        KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS)
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx(hKey,
            "SystemRoot", NULL, NULL, szData, &sv);
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szWindowsPath,
                szData);
            len =
            strlen(szWindowsPath);
            if (szWindowsPath[len - 1] != '\\')
            {
                szWindowsPath[len] = '\\';
                szWindowsPath[len + 1] = 0;
            }
            // now append the path
            to SYSTEM32
                strcat(szWindowsPath,
                    "SYSTEM32\\");
            }
            RegCloseKey(hKey);
        }
        return bRc;
    }
    static void GetVersionInfo(char *szDLLPath, char
    *szExePath)
    {
        DWORD          d;
        DWORD          dwSize;
        dwSize;
        DWORD          dwBytes;
        char          *ptr;
        VS_FIXEDFILEINFO  *vs;
        versionDllMS = 0;
        versionDllLS = 0;

```

```

        if (_access(szDLLPath, 0) == 0)
        {
            dwSize =
            GetFileVersionInfoSize(szDLLPath, &d);
            if (dwSize)
            {
                ptr = (char
                *)malloc(dwSize);

                GetFileVersionInfo(szDLLPath, 0, dwSize,
                ptr);
                VerQueryValue(ptr,
                "\\", &vs, &dwBytes);
                >dwProductVersionMS;
                >dwProductVersionLS;
                free(ptr);
            }
            versionExeMS = 0xFFFF;
            versionExeLS = 0xFFFF;
            dwSize = GetFileVersionInfoSize(szExePath,
            &d);
            if (dwSize)
            {
                ptr = (char *)malloc(dwSize);
                GetFileVersionInfo(szExePath, 0,
                dwSize, ptr);
                VerQueryValue(ptr, "\\", &vs,
                &dwBytes);

                versionExeMS = vs-
                >dwProductVersionMS;
                versionExeLS = LOWORD(vs-
                >dwProductVersionLS);
                versionExeMM = HIWORD(vs-
                >dwProductVersionLS);
                free(ptr);
            }
            return;
        }
        static BOOL CheckWWWService(void)
        {
            SC_HANDLE      schSCManager;
            SC_HANDLE      schService;
            SERVICE_STATUS ssStatus;

            schSCManager = OpenSCManager(NULL, NULL,
            SC_MANAGER_ALL_ACCESS);
            schService = OpenService(schSCManager,
            TEXT("W3SVC"), SERVICE_ALL_ACCESS);
            if (schService == NULL)
                return FALSE;

            if (!QueryServiceStatus(schService,
            &ssStatus))
                goto ServiceNotRunning;
            if (!ControlService(schService,
            SERVICE_CONTROL_STOP, &ssStatus))

```

```

                goto ServiceNotRunning;
                //start Service pending, Check the status
                until the service is running.
                if (!QueryServiceStatus(schService,
                &ssStatus))
                    goto ServiceNotRunning;

                CloseServiceHandle(schService);
                return TRUE;

            ServiceNotRunning:
                CloseServiceHandle(schService);
                return FALSE;
            }

            static BOOL StartWWWService(void)
            {
                SC_HANDLE      schSCManager;
                SC_HANDLE      schService;
                SERVICE_STATUS ssStatus;
                DWORD          dwOldCheckPoint;

                schSCManager = OpenSCManager(NULL, NULL,
                SC_MANAGER_ALL_ACCESS);
                schService = OpenService(schSCManager,
                TEXT("W3SVC"), SERVICE_ALL_ACCESS);
                if (schService == NULL)
                    return FALSE;

                if (!StartService(schService, 0, NULL))
                    goto StartWWWErr;
                //start Service pending, Check the status
                until the service is running.
                if (!QueryServiceStatus(schService,
                &ssStatus))
                    goto StartWWWErr;
                while( ssStatus.dwCurrentState !=
                SERVICE_RUNNING)
                {
                    dwOldCheckPoint =
                    ssStatus.dwCheckPoint;
                    //Save the current checkpoint.
                    Sleep(ssStatus.dwWaitHint);

                    //Wait for the specified interval.
                    if (
                    !QueryServiceStatus(schService, &ssStatus))
                        //Check the status again.
                        break;
                    if (dwOldCheckPoint >=
                    ssStatus.dwCheckPoint) //Break if
                    the checkpoint has not been incremented.
                        break;
                }
                if (ssStatus.dwCurrentState ==
                SERVICE_RUNNING)
                    goto StartWWWErr;
                CloseServiceHandle(schService);

```

```

        return TRUE;

StartWWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWWebService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
        SC_MANAGER_ALL_ACCESS);
    //schService = OpenService(schSCManager,
    TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    schService = OpenService(schSCManager,
    TEXT("IISADMIN"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWWebErr;

    if ( !ControlService(schService,
    SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWWebErr;
    //start Service pending, Check the status
    until the service is running.
    if (!QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWWebErr;
    while( ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
    {

        dwOldCheckPoint =
    ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
    ssStatus.dwCheckPoint)          //Break if
the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
        goto StopWWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;
}

```

```

StopWWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0,
    PM_REMOVE) )
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

static void ConfigureIIS6(HWND hwnd, HWND hDlg)
{
    int irc;
    char szErrTxt[128];
    FILE *fErrorFile;

    SetDlgItemText(hDlg, IDC_STATUS,
    "Configuring IIS6... ");
    //SendDlgItemMessage(hDlg, IDC_PROGRESS1,
    PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    irc = system("IIS6_CONFIG.CMD");

    // since the return code from the command
    file is always 1,
    // check to see if the file iis6_config.err
    exists
    // if it does, then something hosed
    fErrorFile = fopen("IIS6_CONFIG.err", "r");
    if (fErrorFile != NULL)
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "IIS6
configuration error." );
        strcat( szErrTxt, "Check
iis6_config.err" );
        MessageBox(hwnd, szErrTxt, NULL,
        MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
}

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//

```

install.h

#define IDD_DIALOG1	101
#define IDI_ICON1	102
#define IDR_TPCCDLL	103
#define IDD_DIALOG2	105
#define IDI_ICON2	106
#define IDR_DELIVERY	107
#define IDD_DIALOG3	108
#define BN_LOG	1001
#define ED_KEEP	1002
#define ED_THREADS	1003
#define ED_THREADS2	1004
#define IDC_PATH	1007
#define IDC_VERSION	1009
#define IDC_RESULTS	1010
#define IDC_PROGRESS1	1011
#define IDC_STATUS	1012
#define IDC_BUTTON1	1013
#define ED_MAXCONNECTION	1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT	1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE	1017
#define ED_IIS_THREAD_TIMEOUT	1018
#define ED_IIS_LISTEN_BACKLOG	1019
#define IDC_ODBC	1022
#define IDC_CONNECT_POOL	1023
#define ED_USER_CONNECT_DELAY_TIME	1024
 // Next default values for new objects	
//	

install.rc

```

// Microsoft Visual C++ generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
/////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

EDITTEXT
ED_IIS_LISTEN_BACKLOG,164,268,34,12,ES_RIGHT |
ES_NUMBER,
WS_EX_RTLREADING
DEFPUSHBUTTON "OK",IDOK,53,296,50,14
PUSHBUTTON "Cancel",IDCANCEL,119,296,50,14
EDITTEXT
IDC_PATH,106,26,91,13,ES_AUTOHSCROLL | ES_READONLY
LTEXT "Number of Delivery
Threads:",IDC_STATIC,35,45,115,12
LTEXT "Max Number of
Connections:",IDC_STATIC,35,73,115,12
RTEXT "Version
4.11",IDC_VERSION,120,4,89,9
LTEXT "IIS Max Thread Pool
Limit:",IDC_STATIC,36,226,115,12
LTEXT "Web Service Backlog Queue
Size:",IDC_STATIC,36,240,115,
12
LTEXT "IIS Thread Timeout
(seconds):",IDC_STATIC,36,254,115,12
LTEXT "IIS Listen
Backlog:",IDC_STATIC,36,270,115,10
LTEXT "Installation
directory:",IDC_STATIC,35,29,71,10
GROUPBOX "Transaction
Monitor",IDC_STATIC,33,90,165,33
LTEXT "Server
Name:",IDC_STATIC,35,148,56,8
LTEXT "User ID:",IDC_STATIC,35,161,60,8
LTEXT "User
Password:",IDC_STATIC,35,174,83,8
LTEXT "Database
Name:",IDC_STATIC,35,187,54,8
GROUPBOX "SQL Server Connection
Properties",IDC_STATIC,22,132,187,
74
GROUPBOX "Web Client
Properties",IDC_STATIC,22,15,187,113
GROUPBOX "IIS
Settings",IDC_STATIC,22,210,187,79
LTEXT "Max Pending
Deliveries:",IDC_STATIC,35,59,115,12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFONT | DS_SETFOREGROUND | DS_3DLOOK |
DS_CENTER | WS_POPUP |
WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON "OK",IDOK,33,45,50,9
    CTEXT "HTML TPC-C Installation
Successful",IDC_RESULTS,7,22,
102,18,0,WS_EX_CLIENTEDGE
    ICON
IDI_ICON2, IDC_STATIC,50,7,18,20,SS_REALSIZEIMAGE,
WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG 0, 0, 91, 40

```

```

STYLE DS_SYSMODAL | DS_SETFONT | DS_MODALFRAME |
DS_3DLOOK | DS_CENTER |
WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL
"Progress1",IDC_PROGRESS1,"msctls_progress32",WS_BORD
ER,
    7,20,77,13
    CTEXT
"Static",IDC_STATUS,7,7,77,12,SS_SUNKEN
END

IDD_DIALOG4 DIALOG 0, 0, 291, 202
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT
IDC_LICENSE,7,7,271,167,ES_MULTILINE | ES_AUTOVSCROLL
| ES_AUTOHSCROLL | ES_READONLY |
WS_VSCROLL | WS_HSCROLL
    DEFPUSHBUTTON "I &Agree",IDOK,87,181,50,14
    PUSHBUTTON "&Cancel",IDCANCEL,153,181,50,14
END

////////////////////////////////////////////////////////////////
// DESIGNINFO
// 

#ifndef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 318
    END
    IDD_DIALOG2, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 109
        TOPMARGIN, 7
        BOTTOMMARGIN, 54
    END
    IDD_DIALOG3, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 84
        TOPMARGIN, 7
    END

```

```

BOTMARGIN, 33
END

IDD_DIALOG4, DIALOG
BEGIN
    LEFTMARGIN, 7
    RIGHTMARGIN, 278
    TOPMARGIN, 7
    BOTMARGIN, 195
END
END
#endif // APSTUDIO_INVOKED

#ifndef APSTUDIO_INVOKED
/////////////////////////////////////////////////////////////////
// TEXTINCLUDE
// TEXTINCLUDE
1 TEXTINCLUDE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE
BEGIN
    "#include ""afxres.h""\r\n"
    "\0"
END

3 TEXTINCLUDE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED
/////////////////////////////////////////////////////////////////
// Icon
// Icon with lowest ID value placed first to ensure
application icon
// remains consistent on all systems.
IDI_ICON1           ICON
"icon1.ico"
IDI_ICON2           ICON
"icon2.ico"
/////////////////////////////////////////////////////////////////
// TPCCDLL
// TPCCDLL
IDR_TPCCDLL          TPCCDLL
"..\..\isapi_dll\bin\tpcc.dll"

```

install_com.cpp

```
/*      FILE:          INSTALL_COM.CPP
*           Microsoft
TPC-C Kit Ver. 4.51.000          Microsoft
*                                     Copyright
Microsoft, 1999
*                                     All Rights Reserved
*
*                                     not audited
*
* PURPOSE:  installation code for COM
application for TPC-C Web Kit
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
*        4.20.000 - first version
*/
#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp
= NULL;
    ICatalogCollection* pCatalogCollectionCo
= NULL;
    ICatalogCollection* pCatalogCollectionItf
= NULL;
    ICatalogCollection* pCatalogCollectionMethod
= NULL;

    ICatalogObject* pCatalogObjectApp
= NULL;
    ICatalogObject* pCatalogObjectCo
= NULL;
    ICatalogObject* pCatalogObjectItf
= NULL;
    ICatalogObject* pCatalogObjectMethod
= NULL;

    _bstr_t
bstrTemp, bstrTemp2, bstrTemp3, bstrTemp4;
    _bstr_t
bstrDllPath = szDllPath;
    _variant_t
vTmp, vKey;
    long
lActProp, lCount, lCountCo, lCountItf,
lCountMethod;
```

```
    bool
bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);

    HRESULT hr =
CoCreateInstance(CLSID_COMAdminCatalog,
NULL,
CLSCCTX_INPROC_SERVER,
IID_IComAdminCatalog,
(void**) &pCOMAdminCat);

    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "Applications";

    // Attempt to connect to "Applications" in
the Catalog
    hr = pCOMAdminCat->GetCollection(bstrTemp,
(IDispatch**) &pCatalogCollectionApp);
    if (!SUCCEEDED(hr)) goto Error;

    // Attempt to load the "Applications"
collection
    hr = pCatalogCollectionApp->Populate();
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionApp-
>get_Count(&lCount);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through applications to delete
existing "TPC-C" application (if any)
    while (lCount > 0)
    {
        hr = pCatalogCollectionApp-
>get_Item(lCount - 1, (IDispatch**) &pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogObjectApp-
>get_Name(&vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        if (wcscmp(vTmp.bstrVal, L"TPC-
C"))
        {
            lCount--;
            continue;
        }
        else
        {
            hr = pCatalogCollectionApp->Remove(lCount - 1);
            if (!SUCCEEDED(hr))
                goto Error;
        }
    }

    hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

    // add the new application
    hr = pCatalogCollectionApp-
>Add((IDispatch**) &pCatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

    // set properties
    bstrTemp = "Name";
    vTmp = "TPC-C";
    hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // set as a library (in process)
    application
    bstrTemp = "Activation";
    lActProp = COMAdminActivationInproc;
    vTmp = lActProp;
    hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // set security level to process
    bstrTemp = "AccessChecksLevel";
    lActProp =
COMAdminAccessChecksApplicationLevel;
    vTmp = lActProp;
    hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // save key to get the Components
collection later
    hr = pCatalogObjectApp->get_Key(&vKey);
    if (!SUCCEEDED(hr)) goto Error;

    // save changes (app creation) so component
installation will work
    hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

    pCatalogObjectApp->Release();
    pCatalogObjectApp = NULL;

    bstrTemp = "TPC-C";
    // app name
    bstrTemp2 = bstrDllPath +
"tpcc_com_all.dll";
    // DLL
    bstrTemp3 = bstrDllPath +
"tpcc_com_all.tlb";
    // type library (TLB)
```

```

        bstrTemp4 =
"tpcc_com_ps.dll";           bstrDllPath +
                                // proxy/stub dll

        hr = pCOMAdminCat-
>InstallComponent(bstrTemp,

        bstrTemp2,
        bstrTemp3,
        bstrTemp4);
if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "Components";
        hr = pCatalogCollectionApp-
>GetCollection(bstrTemp, vKey, (IDispatch**)&pCatalogCollectionCo);
if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo->Populate();
if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo-
>get_Count(&lCountCo);
if (!SUCCEEDED(hr)) goto Error;

        // iterate through components in
application and set the properties
        while (lCountCo > 0)
        {
            hr = pCatalogCollectionCo-
>get_Item(lCountCo - 1, (IDispatch**)&pCatalogObjectCo);
            if (!SUCCEEDED(hr)) goto Error;

            // used for debugging (view the
name)
            hr = pCatalogObjectCo-
>get_Name(&vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructionEnabled";
            bTmp = TRUE;
            vTmp = bTmp;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructorString";
            bstrTemp2 = "dummy string (do not
remove)";
            vTmp = bstrTemp2;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp =
"JustInTimeActivation";
            bTmp = TRUE;

```

```

        vTmp = bTmp;
        hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "MaxPoolSize";
        vTmp.Clear();           // clear
variant so it isn't stored as a bool (_variant_t
feature)
        vTmp = (long)30;
        hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp =
"ObjectPoolingEnabled";
        bTmp = TRUE;
        vTmp = bTmp;
        hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // save key to get the
InterfacesForComponent collection
        hr = pCatalogObjectCo-
>get_Key(&vKey);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp =
"InterfacesForComponent";
        hr = pCatalogCollectionCo-
>GetCollection(bstrTemp, vKey, (IDispatch**)&pCatalogCollectionItf);
if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionItf-
>Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionItf-
>get_Count(&lCountItf);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through interfaces in
component
        while (lCountItf > 0)
        {
            hr =
pCatalogCollectionItf->get_Item(lCountItf - 1,
(IDispatch**)&pCatalogObjectItf);
            if (!SUCCEEDED(hr))
goto Error;

            // save key to get the
MethodsForInterface collection
            hr = pCatalogObjectItf-
>get_Key(&vKey);
            if (!SUCCEEDED(hr))
goto Error;

```

```

        bstrTemp =
"MethodsForInterface";
        hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey,
(IDispatch**)&pCatalogCollectionMethod);
        if (!SUCCEEDED(hr))
goto Error;

        hr =
pCatalogCollectionMethod->Populate();
        if (!SUCCEEDED(hr))
goto Error;

        hr =
pCatalogCollectionMethod->get_Count(&lCountMethod);
        if (!SUCCEEDED(hr))
goto Error;

        // iterate through
methods of interface
        while (lCountMethod >
0)
        {
            hr =
pCatalogCollectionMethod->get_Item(lCountMethod - 1,
(IDispatch**)&pCatalogObjectMethod);
            if
(!SUCCEEDED(hr)) goto Error;

            bstrTemp =
"AutoComplete";
            bTmp = TRUE;
            vTmp = bTmp;
            hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
            if
(!SUCCEEDED(hr)) goto Error;

            pCatalogObjectMethod->Release();
            pCatalogObjectMethod = NULL;
            lCountMethod-
-;
        }
        // save changes
        hr =
pCatalogCollectionMethod->SaveChanges(&lActProp);
        if (!SUCCEEDED(hr))
goto Error;

        pCatalogObjectItf-
>Release();
        pCatalogObjectItf =
NULL;
        lCountItf--;
    }
}

```

```

        pCatalogObjectCo->Release();
        pCatalogObjectCo = NULL;

    }

    // save changes
    hr = pCatalogCollectionCo-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

    pCatalogCollectionApp->Release();
    pCatalogCollectionApp = NULL;

    pCatalogCollectionCo->Release();
    pCatalogCollectionCo = NULL;

    pCatalogCollectionItf->Release();
    pCatalogCollectionItf = NULL;

    pCatalogCollectionMethod->Release();
    pCatalogCollectionMethod = NULL;

Error:
    CoUninitialize();

    if (!SUCCEEDED(hr))
    {
        LPTSTR lpBuf;
        DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER |
FORMAT_MESSAGE_FROM_SYSTEM,
                NULL,
                hr,
                MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),
                (LPTSTR)
&lpBuf,
                0,
                NULL);
//           _tprintf(_T("Error adding
components. HRESULT: 0x%08X\n"), hr, lpBuf);
        return TRUE;
    }
    else
        return FALSE;
}

```

license.txt

END-USER LICENSE AGREEMENT FOR
MICROSOFT TPC-C BENCHMARK KIT

IMPORTANT READ CAREFULLY: This Microsoft End-

User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and Microsoft Corporation for the Microsoft software product identified above, which includes computer software and may include associated media, printed materials, and online or electronic documentation (SOFTWARE PRODUCT). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this Agreement, you are not authorized to use the SOFTWARE PRODUCT.

The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE. This EULA grants you the following rights:

Use. Microsoft grants to you the right to install and use copies of the SOFTWARE PRODUCT only in conjunction with validly licensed copies of Microsoft SQL Server and/or Microsoft Windows NT Server software. You may also make copies of the SOFTWARE PRODUCT for backup and archival purposes.

2. RESTRICTIONS.

-- You must maintain all copyright notices on all copies of the SOFTWARE PRODUCT.
-- You may not distribute copies of the SOFTWARE PRODUCT to third parties.
-- You may not rent, lease or lend the SOFTWARE PRODUCT.
-- You may not use the SOFTWARE PRODUCT or any derivative works thereof to internally test database management system software other than Microsoft SQL Server and/or operating system software other than Microsoft Windows NT.
-- You may not disclose the results of any benchmark tests using the SOFTWARE PRODUCT to any third party without Microsoft's prior written approval.
-- You may not disclose or provide the SOFTWARE PRODUCT or any derivative works thereof, or any information relating to the SOFTWARE PRODUCT (including the existence of the SOFTWARE PRODUCT or the results of use and testing or benchmark testing), to any third party without Microsoft's written permission.

3. TERMINATION. Without prejudice to any other rights,

Microsoft may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT.

4. COPYRIGHT. All title and copyrights in and to the SOFTWARE PRODUCT and any copies thereof are owned by Microsoft or its suppliers. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT is the property of the respective content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants you no rights to use such content.

5. UPGRADES. If the SOFTWARE PRODUCT is labeled as an upgrade, you must be properly licensed to use a product identified by Microsoft as being eligible for the upgrade in order to use the SOFTWARE PRODUCT. A SOFTWARE PRODUCT labeled as an upgrade replaces and/or supplements the product that formed the basis for your eligibility for the upgrade. You may use the resulting upgraded product only in accordance with the terms of this EULA.

6. U.S. GOVERNMENT RESTRICTED RIGHTS.

The SOFTWARE PRODUCT is provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, WA 98052-6399.

7. EXPORT RESTRICTIONS.

You agree that you will not export or re-export the SOFTWARE PRODUCT to any country, person, entity or end user subject to U.S.A. export restrictions. Restricted countries currently include, but are not necessarily limited to Cuba, Iran, Iraq, Libya, North Korea, Syria, and the Federal Republic of Yugoslavia (Serbia and Montenegro, U.N. Protected Areas and areas of Republic of Bosnia and Herzegovina under the

control of Bosnian Serb forces). You warrant and represent that neither the U.S.A. Bureau of Export Administration nor any other federal agency has suspended, revoked or denied your export privileges.

8. NO WARRANTY. ANY USE OF THE SOFTWARE PRODUCT IS AT YOUR OWN RISK. THE SOFTWARE PRODUCT IS PROVIDED FOR USE ONLY WITH MICROSOFT SQL SERVER AND/OR MICROSOFT WINDOWS NT SERVER SOFTWARE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MICROSOFT AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT.

9. NO LIABILITY FOR CONSEQUENTIAL DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL MICROSOFT OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT, EVEN IF MICROSOFT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

10. LIMITATION OF LIABILITY. MICROSOFT'S ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY UNDER THIS EULA SHALL NOT EXCEED FIVE DOLLARS (US\$5.00).

11. MISCELLANEOUS
This EULA is governed by the laws of the State of Washington, U.S.A.
Should you have any questions concerning this EULA, or if you desire to contact Microsoft for any reason, please contact the Microsoft subsidiary serving your country, or write:
Microsoft Sales Information Center/One Microsoft Way/Redmond, WA 98052-6399.

Si vous avez acquis votre produit Microsoft au CANADA, la garantie limitée suivante vous concerne:

EXCLUSION DE GARANTIES. Microsoft renonce entièrement à toute garantie pour le LOGICIEL. Le

LOGICIEL et toute autre documentation s'y rapportant sont fournis "comme tels" sans aucune garantie quelle qu'elle soit, expresse ou implicite, y compris, mais ne se limitant pas aux garanties implicites de la qualité, marchandise ou un usage particulier. Le risque total d'écoulement de l'utilisation ou de la performance du LOGICIEL est entre vos mains.

RESPONSABILITÉ LIMITÉE. La seule obligation de Microsoft et votre recours exclusif concernant ce contrat n'excéderont pas cinq dollars (US\$5.00).

ABSENCE DE RESPONSABILITÉ POUR LES DOMMAGES INDIRECTS.
Microsoft ou ses fournisseurs ne pourront être tenus responsables en aucune circonstance de tout dommage quel qu'il soit (y compris mais non de façon limitative les dommages directs ou indirects causés par la perte de bannières commerciales, l'interruption des affaires, la perte d'information commerciale ou toute autre perte préjudiciable résultant de l'utilisation ou de l'impossibilité d'utilisation de ce produit, et ce, même si la société, Microsoft a fait, avisé de l'éventualité, de tels dommages. Certains états/juridictions ne permettent pas l'exclusion ou la limitation de responsabilité relative aux dommages indirects ou consécutifs, et la limitation ci-dessus peut ne pas s'appliquer à votre gard. La présente Convention est régie par les lois de la province d'Ontario, Canada. Chacune des parties à la présente reconnaît irrévocablement la compétence des tribunaux de la province d'Ontario et consent à instituer tout litige qui pourrait découler de la présente auparès des tribunaux situés dans le district judiciaire de York, province d'Ontario. Au cas où vous auriez des questions concernant cette licence ou que vous désiriez nous mettre en rapport avec Microsoft pour quelque raison que ce soit, veuillez contacter la succursale Microsoft desservant votre pays, dont l'adresse est fournie dans ce produit, ou écrire à:

Microsoft Customer Sales and Service, One Microsoft Way,
Redmond, Washington 98052 6399.

Methods.h

```
/*
 * FILE: METHODS.H
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * not yet
 * audited
 *
 * PURPOSE: Header file for COM components.
 *
 * Change history:
 * 4.20.000 - first version
 */

enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL,
    ERR_MEM_ALLOC_FAILED
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    }

    CCOMPONENT_ERR(COMPONENT_ERROR Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail, szTextDetail );
        m_SystemErr = dwSystemErr;
        m_szErrorText = NULL;
    }

    ~CCOMPONENT_ERR()
    {
        if (m_szTextDetail != NULL)
    }
}
```

```

        delete []
m_szTextDetail;
        if (m_szErrorText != NULL)
            delete []
m_szErrorText;
    };

    COMPONENT_ERROR m_Error;
    char *m_szTextDetail;
    char *m_szErrorText;
    DWORD m_SystemErr;

    int ErrorType() {return
ERR_TYPE_COMPONENT;};
    char *ErrorTypeStr() { return
"COMPONENT"; }
    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

static void WriteMessageToEventLog(LPTSTR lpszMsg);

/////////////////////////////////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
public ITPCC,
public IObjectControl,
public IObjectConstruct,
public CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
    COM_INTERFACE_ENTRY(ITPCC)
    COM_INTERFACE_ENTRY(IObjectControl)
    COM_INTERFACE_ENTRY(IObjectConstruct)
END_COM_MAP()

    CTPCC_Common();
    ~CTPCC_Common();

    // ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Delivery(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
        txn_in, VARIANT* txn_out);
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall CallSetComplete();
};

```

```

        // IObjectControl
        STDMETHODIMP_(BOOL) CanBePooled() { return
m_bCanBePooled; }
        STDMETHODIMP Activate() { return S_OK; }
        // we don't support COM Services
transactions (no enlistment)
        STDMETHODIMP_(void) Deactivate() { /* nothing to do */ }

        // IObjectConstruct
        STDMETHODIMP Construct(IDispatch * pUnk);

        // helper methods
private:
    BOOL m_bCanBePooled;
    CTPCC_BASE *m_pTxn;

    struct COM_DATA
    {
        int retval;
        int error;
        union
        {
            NEW_ORDER_DATA
            PAYMENT_DATA
            DELIVERY_DATA
            STOCK_LEVEL_DATA
            ORDER_STATUS_DATA
        } u;
    };
};

/////////////////////////////////////////////////////////////////
// CTPCC
class CTPCC :
public CTPCC_Common,
public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
    //COM_INTERFACE_ENTRY2(IUnknown,
    CComObjectRootEx<CComSingleThreadModel>)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

    // CNewOrder
class CNewOrder :

```

```

        public CTPCC_Common,
        public CComCoClass<CNewOrder,
        &CLSID_NewOrder>
    {
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

BEGIN_COM_MAP(CNewOrder)
    COM_INTERFACE_ENTRY2(IUnknown,
    CComObjectRootEx)
        COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
        COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

        // ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
        txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

/////////////////////////////////////////////////////////////////
// COrderStatus
class COrderStatus :
public CTPCC_Common,
public CComCoClass<COrderStatus,
&CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
    //COM_INTERFACE_ENTRY2(IUnknown,
    CComObjectRootEx)
        COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
        COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

        // ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
        txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    //HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

```

////////// CPayment
// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment,
&CLSID_Payment>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
//    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    //    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
}

////////// CStockLevel
// CStockLevel
class CStockLevel :
    public CTPCC_Common,
    public CComCoClass<CStockLevel,
&CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
//    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}

```

```

    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
}



---



## ReadRegistry. cpp



---



```

/* FILE: READREGISTRY.CPP
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Implementation for TPC-C class.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/
/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE: This function reads the NT
registry for startup parameters. There parameters are
under the TPCC key.
*
* RETURNS FALSE = no errors
* TRUE = error reading
registry
*/
BOOL ReadTPCCRegistrySettings(TPCCREGISTRYDATA *pReg)
{
 HKEY hKey;
 DWORD size;
 DWORD type;
 DWORD dwTmp;
 char szTmp[256];

 if (RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS)
 return TRUE;

 // determine database protocol to use;
always has to be ODBC
 pReg->eDB_Protocol = ODBC;
 size = sizeof(szTmp);
 //if (RegQueryValueEx(hKey, "DB_Protocol",
0, &type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS)
 //{
 //if (!strcmp(szTmp,
szDBNames[ODBC]))

```


```

```

        //      pReg->eDB_Protocol =
ODBC;
    //}

    pReg->eTxnMon = None;
    // determine txn monitor to use; may be
either COM, or blank
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "TxnMonitor", 0,
&type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
    {
        if ( !strcmp(szTmp,
szTxnMonNames[COM]) )
            pReg->eTxnMon = COM;
    }

    pReg->bCOM_SinglePool = FALSE;
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey,
"COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
    {
        if ( !strcmp(szTmp, "YES") )
            pReg->bCOM_SinglePool =
TRUE;
    }

    pReg->dwMaxConnections = 0;
    size = sizeof(dwTmp);
    if ( ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
        && (type == REG_DWORD) )
        pReg->dwMaxConnections = dwTmp;

    pReg->dwMaxPendingDeliveries = 0;
    size = sizeof(dwTmp);
    if ( ( RegQueryValueEx(hKey,
"MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
        && (type == REG_DWORD) )
        pReg->dwMaxPendingDeliveries =
dwTmp;

    pReg->dwNumberOfDeliveryThreads = 0;
    size = sizeof(dwTmp);
    if ( ( RegQueryValueEx(hKey,
"NumberOfDeliveryThreads", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
        && (type == REG_DWORD) )
        pReg->dwNumberOfDeliveryThreads =
dwTmp;

    size = sizeof( pReg->szPath );
    if ( RegQueryValueEx(hKey, "Path", 0,
&type, (BYTE *)&pReg->szPath, &size) != ERROR_SUCCESS
)
        pReg->szPath[0] = 0;

    size = sizeof( pReg->szDbServer );
    if ( RegQueryValueEx(hKey, "DbServer", 0,
&type, (BYTE *)&pReg->szDbServer, &size) !=
ERROR_SUCCESS )

```

```

        pReg->szDbServer[0] = 0;

        size = sizeof( pReg->szDbName );
        if ( RegQueryValueEx(hKey, "DbName", 0,
&type, (BYTE *)&pReg->szDbName, &size ) != ERROR_SUCCESS )
            pReg->szDbName[0] = 0;

        size = sizeof( pReg->szDbUser );
        if ( RegQueryValueEx(hKey, "DbUser", 0,
&type, (BYTE *)&pReg->szDbUser, &size ) != ERROR_SUCCESS )
            pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0,
&type, (BYTE *)&pReg->szDbPassword, &size ) != ERROR_SUCCESS )
            pReg->szDbPassword[0] = 0;

        size = sizeof( pReg->szSPPrefix );
        if ( RegQueryValueExW(hKey, L"SPPrefix", 0,
&type, (BYTE *)&pReg->szSPPrefix, &size ) != ERROR_SUCCESS )
            pReg->szSPPrefix[0] = L'\0';

        pReg->dwConnectDelay = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"ConnectDelay", 0, &type, (LPBYTE)&dwTmp, &size ) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwConnectDelay = dwTmp;

        pReg->bCallNoDuplicatesNewOrder = FALSE;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"CallNoDuplicatesNewOrder", 0, &type, (LPBYTE)&dwTmp,
&size ) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->bCallNoDuplicatesNewOrder =
dwTmp;

        RegCloseKey(hKey);

        return FALSE;
    }

```

ReadRegistry.h

```

/*      FILE:          ReadRegistry.h
 *                           Microsoft
TPC-C Kit Ver. 4.20.00
*                           Copyright
Microsoft, 1999
*           All Rights Reserved
*
*                           not audited
*
* PURPOSE: Header for registry related code.
*
* Change history:

```

```

        *                               4.20.000 - first version
        *

enum DBPROTOCOL { Unspecified, ODBC };
const char *szDBNames[] = { "Unspecified", "ODBC" };

enum TXNMON { None, COM };
const char *szTxnMonNames[] = { "NONE", "COM" };

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbServer[32];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
    wchar_t szSPPrefix[32];
    //tpcc_odbcl.dll stored procedures prefix
    DWORD dwConnectDelay;           // delay in
ms to use in pacing connection open and close
    BOOL bCallNoDuplicatesNewOrder; // whether to check for non-duplicate item ids and call
a different New Order SP
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
);

```

RESOURCE.H

```

//{{NO_DEPENDENCIES}}
// Microsoft Visual C++ generated include file.
// Used by install.rc
//
#define IDD_DIALOG1          101
#define IDR_ICON1             102
#define IDR_TPCCDLL           103
#define IDD_DIALOG2           105
#define IDR_ICON2             106
#define IDR_DELIVERY          107
#define IDD_DIALOG3           108
#define IDR_LICENSE1          112
#define IDD_DIALOG4           113
#define IDR_TPCCOBJ1          117
#define IDR_TPCCSTUB1          118
#define IDR_ODBC_DLL           123
#define IDR_COM_DLL            126
#define IDR_COMPS_DLL          127
#define IDR_COMALL_DLL         128
#define IDR_COMTYPLIB_DLL       129
#define IDR_MSVC71              130
#define BN_LOG                  1001
#define ED_KEEP                 1002
#define ED_THREADS               1003

```

#define ED_THREADS2	1004
#define IDC_PATH	1007
#define IDC_VERSION	1009
#define IDC_RESULTS	1010
#define IDC_PROGRESS1	1011
#define IDC_STATUS	1012
#define IDC_BUTTON1	1013
#define ED_MAXCONNECTION	1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT	1015
#define ED_MAXDELIVERIES	1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE	1017
#define ED_IIS_THREAD_TIMEOUT	1018
#define ED_IIS_LISTEN_BACKLOG	1019
#define IDC_DBLIB	1021
#define IDC_LICENSE	1022
#define IDC_ODBC	1022
#define IDC_CONNECT_POOL	1023
#define ED_DB_SERVER	1023
#define ED_USER_CONNECT_DELAY_TIME	1024
#define ED_DB_USER_ID	1024
#define IDC_MTS	1025
#define IDC_TM_MTS	1025
#define IDC_TM_TUXEDO	1026
#define IDC_TM_NONE	1027
#define ED_DB_PASSWORD	1028
#define ED_DB_NAME	1029
#define IDC_TM_ENCINA	1030
// Next default values for new objects	
//	
#ifndef APSTUDIO_INVOKED	
#ifndef APSTUDIO_READONLY_SYMBOLS	
#define _APS_NEXT_RESOURCE_VALUE	131
#define _APS_NEXT_COMMAND_VALUE	40001
#define _APS_NEXT_CONTROL_VALUE	1031
#define _APS_NEXT_SYMED_VALUE	101
#endif	
#endif	

tpcc.cpp

```

/*      FILE:          TPCC.C
 *                           Microsoft
TPC-C Kit Ver. 4.20.00
*                           Copyright
Microsoft, 1999
*           All Rights Reserved
*
*                           Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Main module for TPCC.DLL which is
an ISAPI service dll.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
*           4.20.000 - reworked error
handling; added options for COM and Encina txn
monitors
*/

```

```

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys/timeb.h>
#include <iо.h>
#include <assert.h>

#include <sqatypes.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

#include "../common\src\trans.h"
    //tpkit transaction header contains
definitions of structures specific to TPC-C
#include "../common\src\error.h"
#include "../common\src\txns_base.h"
#include "../common\src\ReadRegistry.h"

#include "....\common\txnlog\include\ratetime.h"
#include "....\common\txnlog\include\spinlock.h"
#include "....\common\txnlog\include\txnlog.h"

// Database layer includes
#include "../db_odbс_dll\src\tpcc_odbс.h"
    // ODBC implementation of TPC-C txns

// Txn monitor layer includes
#include "../tm_com_dll\src\tpcc_com.h"
    // COM Services implementation on
TPC-C txns

#include "httpext.h"
    //ISAPI DLL information header
#include "tpcc.h"
    //this dlls specific structure, value e.t.
header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish
input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];
;

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version
level of this web client interface.

```

```

// The RTE must be synchronized with the interface
level on login, otherwise the login
// will fail. This is a sanity check to catch
problems resulting from mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "420"

static CRITICAL_SECTION
TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog
{
    *txnDelilog = NULL;
        //used to log delivery transaction
information

HANDLE
{
    hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE
{
    hDoneEvent
        =
INVALID_HANDLE_VALUE;
HANDLE
{
    *pDeliHandles
        =
NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD
{
    dwNumDeliveryThreads = 4;
CRITICAL_SECTION
{
    DelBuffCriticalSection;
        //critical section for delivery
transactions cache
DELIVERY_TRANSACTION *pDelBuff
        =
NULL;
DWORD
{
    dwDelBuffSize
        =
100;
        // size of circular buffer for delivery
txns
DWORD
{
    dwDelBuffFreeCount;
        // number of buffers free
DWORD
{
    dwDelBuffBusyIndex
        =
0;
        // index position of entry waiting to be delivered
DWORD
{
    dwDelBuffFreeIndex
        =
0;
        // index position of unused entry
// Critical section to synchronize connection open
and close.
//
CRITICAL_SECTION hConnectCriticalSection;
#include "...\\common\\src\\ReadRegistry.cpp"

```

```

/* FUNCTION: DllMain
*
* PURPOSE:      This function is the entry point
for the DLL. This implementation is based on the
*               fact that
DLL_PROCESS_ATTACH is only called from the inet
service once.
*
* ARGUMENTS:    HANDLE hModule
*               module handle
*               DWORD ul_reason_for_call reason for call
*               LPVOID lpReserved
*               reserved for future use
*
* RETURNS:      BOOL FALSE
*               errors occurred in
initialization
*
*               TRUE
* successfully initialized
*/
DLL
BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    DWORD i;
    char szEvent[LEN_ERR_STRING] = "\0";
    char szLogFile[128];
    char szDilName[128];

// debugging...
// DebugBreak();

try
{
    switch( ul_reason_for_call )
    {
        case
DLL_PROCESS_ATTACH:
{
        {
            DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
            GetComputerName(szMyComputerName, &dwSize);
            szMyComputerName[dwSize] = 0;
        }
        DisableThreadLibraryCalls((HMODULE)hModule);
        InitializeCriticalSection(&TermCriticalSection);
        if (
ReadTPCCRegistrySettings( &Reg ) )
            throw new CWEBCNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );
    }
}

```

```

        dwDelBuffSize
= min( Reg.dwMaxPendingDeliveries, 10000 ); // min
with 10000 as a sanity constraint

        dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with
100 as a sanity constraint

                TermInit();

                if
(Reg.eTxnMon == COM)
{
    strcpy( szDllName, Reg.szPath );
    strcat( szDllName, "tpcc_com.dll");

    hLibInstanceTm = LoadLibrary( szDllName );
if
(hLibInstanceTm == NULL)

    throw new CWEBCLNTRR( ERR_GETPROCADDR_FAILED,
szDllName, GetLastError() );

                // get function pointer to wrapper for class constructor

    pCTPCC_COM_new = (TYPE_CTPCC_COM*)
GetProcAddress(hLibInstanceTm, "CTPCC_COM_new");
if
(pCTPCC_COM_new == NULL)

    throw new CWEBCLNTRR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
}

                // load DLL
for database connection
                if
((Reg.eTxnMon == None) || (dwNumDeliveryThreads > 0))
{
                if
(Reg.eDB_Protocol == ODBC)
{
    strcpy( szDllName, Reg.szPath );
    strcat( szDllName, "tpcc_odbc.dll");

    hLibInstanceDb = LoadLibrary( szDllName );
if
(hLibInstanceDb == NULL)

    throw new CWEBCLNTRR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                // get function pointer to wrapper for
class constructor

    pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
}

```

```

        if (pCTPCC_ODBC_new == NULL)
            throw new CWEBCLNTRR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );

        }

                // Check
whether Service Pack 1 has been installed if
Windows Server 2003. The RTM version has
a
limitation on concurrent HTTP connections.
// a

OSVERSIONINFOEX VersionInfo;
VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
if
(GetVersionEx((LPOSVERSIONINFO)&VersionInfo))
{
    if
(VersionInfo.dwMajorVersion == 5 && // Windows
2000/2003 Server?
        VersionInfo.dwMinorVersion == 2 && // Windows
2003 Server?
        VersionInfo.wServicePackMajor == 0) // Service Pack installed?
{
    TCHAR szMsg[256];
    _snprintf(szMsg, sizeof(szMsg),
"\nRunning on
Windows Server 2003 without at least Service Pack
1\n"
"limits the
number of concurrent HTTP connections to around
8000");
    // Use event logging to log the error.
    //
HANDLE hEventSource =
RegisterEventSource(NULL, TEXT("TPCC.DLL"));
    LPTSTR lpszStrings[1] = { szMsg };
    if (hEventSource != NULL)
}
}

```

```

        {
            ReportEvent(hEventSource, // handle of event source
EVENTLOG_WARNING_TYPE,
0,
// event category
0,
// event ID
NULL,
// current user's SID
1,
// strings in lpszStrings
0,
// no bytes of raw data
(LPCTSTR *)lpszStrings,
// array of error strings
NULL);

                (VOID)
DeregisterEventSource(hEventSource);
}

}

if
(dwNumDeliveryThreads)
{
    // Initialize delivery delay critical section
    //
InitializeCriticalSection(&hConnectCriticalSection);

    // for deferred delivery txns:
    hDoneEvent = CreateEvent( NULL, TRUE /* manual reset */, FALSE /* initially not signalled */ ,
NULL );
    InitializeCriticalSection(&DelBuffCriticalSection);

    hWorkerSemaphore = CreateSemaphore( NULL,
0, dwDelBuffSize, NULL );
}

```

```

dwDelBuffFreeCount = dwDelBuffSize;

InitJulianTime(NULL);

// create unique log file name based on delilog-yymmdd-
hhmm.log

SYSTEMTIME Time;
GetLocalTime( &Time );
wsprintf( szLogFile, "%sdelivery-
%2.2d%2.2d%2.2d-%2.2d%2.2d%2.2dms.log",
Reg.szPath, Time.wYear % 100, Time.wMonth,
Time.wDay, Time.wHour, Time.wMinute, Time.wSecond,
Time.wMilliseconds );

txnDelilog = new CTxnLog(szLogFile,
TXN_LOG_WRITE);

// write event into txn log for START

txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName,
sizeof(szMyComputerName));

// allocate structures for delivery buffers and thread
mgmt

pDeliHandles = new
HANDLE[dwNumDeliveryThreads];
pDelBuff = new
DELIVERY_TRANSACTION[dwDelBuffSize];
// launch DeliveryWorkerThread to perform actual
delivery txns

for(i=0; i<dwNumDeliveryThreads; i++)
{
    pDeliHandles[i] = (HANDLE) _beginthread(
DeliveryWorkerThread, 0, NULL );
    if (pDeliHandles[i] ==
INVALID_HANDLE_VALUE)
        throw new CWEBCNLT_ERR(
ERR_DELIVERY_THREAD_FAILED );
}

break;

case DLL_PROCESS_DETACH:

```

```

(dwNumDeliveryThreads)
{
    if
(txnDelilog != NULL)
    {
        //write event into txn log for STOP
        txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName,
sizeof(szMyComputerName));

        // This will do a clean shutdown of the
        delivery log file

        CTxnLog *txnDelilogLocal = txnDelilog;
        txnDelilog= NULL;
        delete txnDelilogLocal;
    }

    delete [] pDeliHandles;
    delete [] pDelBuff;

    CloseHandle( hWorkerSemaphore );
    CloseHandle( hDoneEvent );
    DeleteCriticalSection(&DelBuffCriticalSection);
    Delete delivery delay critical section
    DeleteCriticalSection(&hConnectCriticalSection);
    DeleteCriticalSection(&TermCriticalSection);

    if
(hLibInstanceTm != NULL)
        FreeLibrary( hLibInstanceTm );
    hLibInstanceTm = NULL;
    if
(hLibInstanceDb != NULL)
        FreeLibrary( hLibInstanceDb );
    hLibInstanceDb = NULL;

```

```

Sleep(500);
break;

default:
/* nothing
 */
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _snprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );
    delete e;
    TerminateExtension(0);
    return FALSE;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception. DLL could not load."));
    TerminateExtension(0);
    return FALSE;
}
return TRUE;
}

/* FUNCTION: GetExtensionVersion
*
* PURPOSE: This function is called by the
inet service when the DLL is first loaded.
*
* ARGUMENTS: HSE_VERSION_INFO *pVer
passed in structure in which to place
expected version number.
*
* RETURNS: TRUE inet service
expected return value.
*/
BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO
*pVer)
{
    pVer->dwExtensionVersion =
MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpyn(pVer->lpszExtensionDesc, "TPC-C
Server.", HSE_MAX_EXT_DLL_NAME_LEN);
    return TRUE;
}

/* FUNCTION: TerminateExtension
*
* PURPOSE: This function is called by the
inet service when the DLL is about to be unloaded.
*/

```

```

/*
 *          Release all resources
in anticipation of being unloaded.
*
* RETURNS:      TRUE      inet service
expected return value.
*/
BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(WORD i=0;
i<dwNumDeliveryThreads; i++)
            WaitForSingleObject(
pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
*
* PURPOSE:      This function is the main entry
point for the TPCC DLL. The internet service
*                  calls this function
passing in the http string.
*
* ARGUMENTS:      EXTENSION_CONTROL_BLOCK
*                  *pECB      structure pointer to passed in
internet
*
*                  service information.
*
* RETURNS:      DWORD
*                  HSE_STATUS_SUCCESS
connection can be dropped if
error
*
*                  HSE_STATUS_SUCCESS_AND_KEEP_CONN
keep connect valid comment sent
*
* COMMENTS:      None
*
*/
DWORD WINAPI
HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int                      TermId,
iSyncId;
    char                     szBuffer[4096];
    int                      lpbSize;
    static char              szHeader[] = "200 Ok";
    DWORD                   dwSize = 6;
// initial value is strlen(szHeader)
    char                     szHeader1[4096];
    DWORD                   dwAddr; // used to
store Win32 exception address

```

```

LPEXCEPTION_POINTERS
pExceptionInfo; // pointer to Win32
exception info

#ifndef ICECAP
StartCAP();
#endif

// Use structured exception handling for
Win32 exceptions
//
try
{
    ProcessCommand(pECB, szBuffer,
TermId, iSyncId);
}
except (
    pExceptionInfo =
GetExceptionInformation(), // can call
GetExceptionInformation only in filter (not handler)
dwAddr =
(DWORD)pExceptionInfo->ExceptionRecord-
>ExceptionAddress, // save the address
EXCEPTION_EXECUTE_HANDLER) // handle all
exceptions
{
    char
szMsg[512];
    int
iLen;

    MEMORY_BASIC_INFORMATION mbi ;
VirtualQuery( (void*)dwAddr,
&mbi, sizeof( mbi ) );
    DWORD hInstance =
(DWORD)mbi.AllocationBase ;

    iLen = wsprintf(szMsg,
TEXT("Unhandled exception (%#x) in Web Client's
HttpExtensionProc. "
"Occured at
address %#x, base %#x, tpcc_com.dll at %#x, tpcc.dll
at %#x, tpcc_com_all.dll at %#x"),
GetExceptionCode(), dwAddr, hInstance,
GetModuleHandle("tpcc_com.dll"),
GetModuleHandle("tpcc.dll"),
GetModuleHandle("tpcc_com_all.dll"));

    if (txnDelilog != NULL)
    {
        txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_WARNING, szMsg, iLen +
1);

    }
    ErrorForm( pECB, ERR_TYPE_WEBDLL,
GetExceptionCode(), TermId, iSyncId, szMsg, szBuffer
);
}

```

```

#endif ICECAP
StopCAP();
#endif

lpbSize = strlen(szBuffer);
dwSize += lpbSize;
dwSize += wsprintf(szHeader1,
"Content-Type:
text/html\r\n"
"Content-Length:
%d\r\n"
"Connection: Keep-
Alive\r\n\r\n" , lpbSize);
strcat( szHeader1, szBuffer );

(*pECB->ServerSupportFunction)(pECB-
>ConnID, HSE_REQ_SEND_RESPONSE_HEADER, szHeader,
(LPDWORD) &dwSize, (LPDWORD)szHeader1);

//finish up and keep connection
pECB->dwHttpStatusCodes = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

/* FUNCTION: ProcessCommand
*
* PURPOSE:      This function parses the commands
from the driver and executes corresponding
transactions.
*
* ARGUMENTS:      *pECB      EXTENSION_CONTROL_BLOCK
structure pointer to passed in
internet
*
*                  service information.
*
* RETURNS:      None (outputs into the
szBuffer parameter).
*
* COMMENTS:      Separated from HttpExtensionProc
to be able to use structured exception handling in
*
*                  HttpExtensionProc (cannot mix C++ and Win32
exceptions in one functions).
*
*/
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId)
{
    int                      iCmd, FormId;
    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd,
&FormId, &TermId, &iSyncId);

        if (TermId != 0)
        {
            if (TermId < 0 ||
TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )

```

```

        {
                //
                debugging...;
                char
szTmp[128];
                wsprintf(
szTmp, "Invalid term ID; TermId = %d", TermId );
                WriteMessageToEventLog( szTmp );
                throw new
CWEBCLNT_ERR( ERR_INVALID_TERMID );
        }

                //must have a valid
syncid here since termid is valid
                if (iSyncId !=
Term.pClientData[TermId].iSyncId)
                throw new
CWEBCLNT_ERR( ERR_INVALID_SYNC_CONNECTION );

                //set use time
Term.pClientData[TermId].iTickCount =
GetTickCount();
        }

switch(iCmd)
{
    case 0:
        WelcomeForm(pECB,
szBuffer);
        break;
    case 1:
        switch( FormId )
        {
            case WELCOME_FORM:
            case MAIN_MENU_FORM:
                break;
            case NEW_ORDER_FORM:
                ProcessNewOrderForm(pECB, TermId,
szBuffer);
                break;
            case PAYMENT_FORM:
                ProcessPaymentForm(pECB, TermId, szBuffer)
                break;
            case DELIVERY_FORM:
                ProcessDeliveryForm(pECB, TermId,
szBuffer);
                break;
            case ORDER_STATUS_FORM:
                ProcessOrderStatusForm(pECB, TermId,
szBuffer);
                break;
            case STOCK_LEVEL_FORM:
                ProcessStockLevelForm(pECB, TermId,
szBuffer);
                break;
        }
}

```

```

        }
        break;
    case 2:           // new-order selected
from menu; display new-order input form
        MakeNewOrderForm(TermId, NULL, INPUT_FORM,
szBuffer);
        break;
    case 3:           // payment selected
from menu; display payment input form
        MakePaymentForm(TermId,
NULL, INPUT_FORM, szBuffer);
        break;
    case 4:           // delivery selected
from menu; display delivery input form
        MakeDeliveryForm(TermId, NULL, INPUT_FORM,
szBuffer);
        break;
    case 5:           // order-status
selected from menu; display order-status input form
        MakeOrderStatusForm(TermId, NULL,
INPUT_FORM, szBuffer);
        break;
    case 6:           // stock-level selected
from menu; display stock-level input form
        MakeStockLevelForm(TermId, NULL,
INPUT_FORM, szBuffer);
        break;
    case 7:           // ExitCmd
TermDelete(TermId);
WelcomeForm(pECB,
szBuffer);
        break;
    case 8:           SubmitCmd(pECB,
szBuffer);
        break;
    case 9:           // menu
        MakeMainMenuForm(TermId,
Term.pClientData[TermId].iSyncId, szBuffer);
        break;
    case 10:          // CMD=Clear
// resets all
connections; should only be used when no other
connections are active
        TermDeleteAll();
TermInit();
WelcomeForm(pECB,
szBuffer);
        break;
}

```

```

        case 11: // CMD=Stats
            StatsCmd(pECB,
szBuffer);
                                break;
                }
            }
        catch (CBaseErr *e)
        {
            ErrorForm( pECB, e->ErrorType(),
e->ErrorNum(), TermId, iSyncId, e->ErrorText(),
szBuffer );
            delete e;
        }
    }

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR     szMsg[256];
    HANDLE   hEventSource;
    LPTSTR   lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("TPCC.DLL"));

    _stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
                     EVENTLOG_ERROR_TYPE, // event type
                     0, // event category
                     0, // event ID
                     NULL, // current user's
SID
                     2, // strings in
lpszStrings
                     0, // no bytes of raw
data
                     (LPCTSTR *)lpszStrings, // array of
error strings
                     NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

/* FUNCTION: DeliveryWorkerThread
*
* PURPOSE:          This function processes deferred
delivery txns.  There are typically several
*                   threads running this
routine.  The number of threads is determined by an
entry
*                   read from the registry.
The thread waits for work by waiting on semaphore.
*                   When a delivery txn is
posted, the semaphore is released.  After processing

```

```

/*
   the delivery txn,
information is logged to record the txn status and
execution
   time.
*/
/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE           *pTxn = NULL;

    DELIVERY_TRANSACTION delivery;
    PDELIVERY_DATA       pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF  txnDeliRec;

    DWORD index;
    HANDLE handles[2];

    SYSTEMTIME           trans_end;
    //delivery transaction finished
    time                trans_start;
    //delivery transaction start time

    assert(txnDeliLog != NULL);

    try
    {
        if (Reg.eDB_Protocol == ODBC)
        {
            if (Reg.dwConnectDelay
> 0)
            {
                // Synchronize connect (for VIA)
                //

                EnterCriticalSection(&hConnectCriticalSection);

                Sleep(Reg.dwConnectDelay);

                LeaveCriticalSection(&hConnectCriticalSection);
            }

            pTxn = pCTPCC_ODBC_new(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
szMyComputerName, Reg.szDbName,
Reg.szSPPrefix,
Reg.bCallNoDuplicatesNewOrder );
        }
        pDeliveryData = pTxn->BuffAddr_Delivery();
    }
}

```

```

    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in
Delivery Txn thread. Could not connect to database.
"
        "%s.
Server=%s, User=%s, Password=%s, Database=%s",
        e-
>ErrorText(), Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
        WriteMessageToEventLog( szTmp );
        delete e;
        goto ErrorExit;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
        goto ErrorExit;
    }

    while (TRUE)
    {
        try
        {
            //while delivery thread
running, i.e. user has not requested termination
            while (TRUE)
            {
                // need to
wait for multiple objects: program exit or worker
semaphore;
                handles[0] =
hDoneEvent;
                handles[1] =
hWorkerSemaphore;
                index =
WaitForMultipleObjects( 2, &handles[0], FALSE,
INFINITE );
                if (index ==
WAIT_OBJECT_0)

                    goto ErrorExit;

                ZeroMemory(&txnDeliRec,
sizeof(txnDeliRec));
                txnDeliRec.TxnType =
TXN_REC_TYPE_TPCC_DELIV_DEF;
                // make a
local copy of current entry from delivery buffer and
increment buffer index
                EnterCriticalSection(&DelBuffCriticalSection);
                delivery =
*(pDelBuff+dwDelBuffBusyIndex);
                dwDelBuffFreeCount++;
}
}

```

```

        dwDelBuffBusyIndex++;
        if
(dwDelBuffBusyIndex == dwDelBuffSize) // wrap-
around if at end of buffer

        dwDelBuffBusyIndex = 0;

        LeaveCriticalSection(&DelBuffCriticalSection);

        pDeliveryData->w_id = delivery.w_id;
        pDeliveryData->o_carrier_id =
delivery.o_carrier_id;

        txnDeliRec.w_id = pDeliveryData->w_id;
        txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;

        txnDeliRec.TxnStartT0 =
Get64BitTime(&delivery.queue);

        GetLocalTime(
&trans_start );
        pTxn-
>Delivery();
        GetLocalTime(
&trans_end );

        //log txn
        txnDeliRec.TxnStatus = ERR_SUCCESS;
        for (int i=0;
i<10; i++)
        txnDeliRec.o_id[i] = pDeliveryData-
>o_id[i];

        txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) -
txnDeliRec.TxnStartT0);

        txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) -
Get64BitTime(&trans_start));

        if
(txnDeliLog != NULL)
        txnDeliLog->WriteToLog(&txnDeliRec);
    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "%s
Error (code %d) in Delivery Txn thread. %s",

```

```

e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText() );
        WriteMessageToEventLog(
szTmp );

                // log the error txn
txnDeliRec.TxnStatus =
e->ErrorType();
                if (txnDeliog != NULL)
                        txnDeliog-
>WriteToLog(&txnDeliRec);

                delete e;
            }
            catch (...)
            {
                // unhandled exception;
shouldn't happen; not much we can do...

                WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
            }
}

ErrorExit:
    if (Reg.dwConnectDelay > 0)
    {
        // Synchronize disconnect (for
VIA)
        //

        EnterCriticalSection(&hConnectCriticalSecti
on);

        Sleep(Reg.dwConnectDelay);
    }

    delete pTxn;

    if (Reg.dwConnectDelay > 0)
    {
        // Synchronize disconnect (for
VIA)
        //

        LeaveCriticalSection(&hConnectCriticalSecti
on);
    }

    _endthread();
}

/* FUNCTION: PostDeliveryInfo
*
* PURPOSE:      This function enters the delivery
txn into the deferred delivery buffer.
*
* RETURNS:      BOOL      FALSE
*                  delivery information posted successfully
*
*                  TRUE      error cannot post delivery info
*/

```

```

BOOL PostDeliveryInfo(long w_id, short o_carrier_id)
{
    BOOL bError;

    EnterCriticalSection(&DelBuffCriticalSection);
    if (dwDelBuffFreeCount > 0)
    {
        bError = FALSE;
        (pDelBuff+dwDelBuffFreeIndex)->w_id =
        (pDelBuff+dwDelBuffFreeIndex)->o_carrier_id =
        o_carrier_id;

        GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)
->queue);

        dwDelBuffFreeCount--;
        dwDelBuffFreeIndex++;
        if (dwDelBuffFreeIndex == dwDelBuffSize)
            dwDelBuffFreeIndex = 0;
        // wrap-around if at end of
        buffer
    }
    else
        // No free buffers.  Return an
error, which indicates that the delivery buffer is
full.
        // Most likely, the number of
delivery worker threads needs to be increased to keep
up
        // with the txn rate.
        bError = TRUE;
    LeaveCriticalSection(&DelBuffCriticalSection);

    if (!bError)
        // increment worker semaphore to
wake up a worker thread
        ReleaseSemaphore(
hWorkerSemaphore, 1, NULL );

    return bError;
}

/* FUNCTION: ProcessQueryString
*
* PURPOSE:      This function extracts the
relevant information out of the http command passed
in from
*                  the browser.
*
* COMMENTS:      If this is the initial connection
i.e. client is at welcome screen then
*                  there will
not be a terminal id or current form id.  If this is
the case
*                  then the
pTermid and pFormid return values are undefined.
*/

```

```

void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermid, int
*pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e.
CMD=command
    static char *szCmds[] =
    {
        "Process", "..NewOrder..",
        "..Payment..", "..Delivery..", "..Order-Status..",
        "..Stock-Level..", "...Exit..", "Submit", "Menu",
        "Clear", "Stats", ""
    };

    *pCmd = 0; // default is
the login screen
    *pTermid = 0;

    // if no params (i.e., empty query string),
then return login screen
    if (strlen(pECB->lpszQueryString) == 0)
        return;

    // parse FORMID, TERMID, and SYNCID
    *pFormId = GetIntKeyValue(&ptr, "FORMID",
NO_ERR, NO_ERR);
    *pTermId = GetIntKeyValue(&ptr, "TERMID",
NO_ERR, NO_ERR);
    *pSyncId = GetIntKeyValue(&ptr, "SYNCID",
NO_ERR, NO_ERR);

    // parse CMD
    GetKeyValue(&ptr, "CMD", szBuffer,
sizeof(szBuffer), ERR_COMMAND_UNDEFINED);

    // see which command it matches
    for(i=0; i++) {
        if (szCmds[i][0] == 0)
            // no more; no match;
        return error
        throw new CWEBCNT_ERR(
ERR_COMMAND_UNDEFINED );
        if ( !strcmp(szCmds[i], szBuffer)
)
        {
            *pCmd = i+1;
            break;
        }
    }

    /* FUNCTION: void WelcomeForm
*
*/
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuf)

```

```

{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this
is first form client sees.
    strcpy( szBuffer,
    "<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"

        "<B><BIG>Microsoft TPC-C Web Client (ver
4.20)</BIG></B> <BR> <BR>

        "<font face=\\"Courier New\\><PRE>"

        "Compiled: __DATE__ , __TIME__ <BR>
        "Source: __FILE__ ( __TIMESTAMP__ )
<BR>

        "</PRE></font>

        "<FORM ACTION=\\"tpcc.dll\\" METHOD=\\"GET\\">

        "<INPUT TYPE=\\"hidden\\" NAME=\\"STATUSID\\"
VALUE=\\"0\\">>

        "<INPUT TYPE=\\"hidden\\" NAME=\\"ERROR\\"
VALUE=\\"0\\">>

        "<INPUT TYPE=\\"hidden\\" NAME=\\"FORMID\\"
VALUE=\\"1\\">>

        "<INPUT TYPE=\\"hidden\\" NAME=\\"TERMID\\"
VALUE=\\"0\\">>

        "<INPUT TYPE=\\"hidden\\" NAME=\\"SYNCID\\"
VALUE=\\"0\\">>

        "<INPUT TYPE=\\"hidden\\" NAME=\\"VERSION\\"
VALUE=\\" WEBCLIENT_VERSION \\\">>
    );

    sprintf( szTmp, "Configuration
Settings: <BR><font face=\\"Courier New\\"
color=\\"blue\\"><PRE>

        "Txn Monitor      = <B>%s</B><BR>
        "Database protocol = <B>%s</B><BR>
        "Max Connections   = <B>%d</B><BR>
of Delivery Threads = <B>%d</B><BR>" "#

        "Max Pending Deliveries = <B>%d</B><BR>
szTnxMonNames[Reg.eTnxMon],
szDBNames[Reg.eDB_Protocol],
        Reg.dwMaxConnections,
dwNumDeliveryThreads, dwDelBuffSize );
    strcat( szBuffer, szTmp);

    if (Reg.eTnxMon == COM)

```

```

{
    sprintf( szTmp, "COM Single
Pool      = <B>%s</B><BR>", Reg.bCOM_SinglePool ?
"YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>");

if (Reg.eTnxMon == None)
    // connection options may be
specified when not using a txn monitor
    sprintf( szTmp, "Please enter
your database options for this connection:<BR>

        "<font face=\\"Courier New\\"
color=\\"blue\\"><PRE>

        "DB Server      = <INPUT NAME=\\"db_server\\"
SIZE=20 VALUE=\\"%s\\">><BR>
        "DB User ID     = <INPUT NAME=\\"db_user\\"
SIZE=20 VALUE=\\"%s\\">><BR>
        "DB Password    = <INPUT NAME=\\"db_passwd\\"
SIZE=20 VALUE=\\"%s\\">><BR>
        "DB Name        = <INPUT NAME=\\"db_name\\"
SIZE=20 VALUE=\\"%s\\">><BR>
    "</PRE></font>

Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
else
    // if using a txn monitor,
connection options are determined from registry;
can't
    // set per user. show options
fyi
    sprintf( szTmp, "Database
options which will be used by the transaction
monitor:<BR>

        "<font face=\\"Courier New\\"
color=\\"blue\\"><PRE>

        "DB Server      = <B>%s</B><BR>
        "DB User ID     = <B>%s</B><BR>
        "DB Password    = <B>%s</B><BR>
        "DB Name        = <B>%s</B><BR>
    "</PRE></font>

Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
    strcat( szBuffer, szTmp);

    sprintf( szTmp, "Please enter your
Warehouse and District for this session:<BR>"

```

```

        "<font face=\\"Courier New\\"
color=\\"blue\\"><PRE>
        strcat( szBuffer, szTmp);
        strcat( szBuffer, "Warehouse ID = <INPUT
NAME=\\"w_id\\" SIZE=6<BR>
        "District ID   = <INPUT NAME=\\"d_id\\"
SIZE=2><BR>" "</PRE></font><HR>
        "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"Submit\\">>

    "</FORM></BODY></HTML>"

/* FUNCTION: SubmitCmd
*
* PURPOSE: This function allocated a new
terminal id in the Term structure array.
*/
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int             iNewTerm;
    char            *ptr = pECB->lpszQueryString;
    char            szVersion[32]      = { 0 };
    char            szServer[32]       = { 0 };
    char            szUser[32]         = "sa";
    char            szPassword[32]     = { 0 };
    char            szDatabase[32]    = "tpcc";

    // validate version field; the version
field ensures that the RTE is synchronized with the
web client
    GetKeyValue(&ptr, "VERSION", szVersion,
sizeof(szVersion), ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCNT_ERR(
ERR_VERSION_MISMATCH );

    if (Reg.eTnxMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server",
szServer, sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user",
szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd",
szPassword, sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name",
szDatabase, sizeof(szDatabase), NO_ERR);
    }
}

```

```

    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_W_ID_INVALID );

    // parse district ID
    int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
    if ( d_id < 1 || d_id > 10 )
        throw new CWEBCLNT_ERR(
ERR_D_ID_INVALID );

    iNewTerm = TermAdd();

    Term.pClientData[iNewTerm].w_id = w_id;
    Term.pClientData[iNewTerm].d_id = d_id;

    try
    {
        if (Reg.eTxnMon == COM)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
            else if (Reg.eDB_Protocol ==
ODBC)

                Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword,
szMyComputerName,

                szDatabase, Reg.szSPPrefix,

                Reg.bCallNoDuplicatesNewOrder );
    }
    catch (...)
    {
        TermDelete(iNewTerm);
        throw; // pass
exception upward
    }

    MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
}

/* FUNCTION: StatsCmd
*
* PURPOSE: This function returns to the
browser the total number of active terminal ids.
*          This routine is for
development/debugging purposes.
*/

```

```

void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int i;
    int iTotal;

    EnterCriticalSection(&TermCriticalSection);

    iTotal = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)
            iTotal++;
    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,
    "<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>" "<><BODY><B><BIG> Total
Active Connections: %d </BIG></B><BR></BODY></HTML>" , iTotal );
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        {ERR_COMMAND_UNDEFINED,
        "Command undefined."},
        {ERR_D_ID_INVALID,
        "Invalid District ID Must be 1 to 10."},
        {ERR_DELIVERY_CARRIER_ID_RANGE,
        "Delivery Carrier ID out of range
must be 1 - 10."},
        {ERR_DELIVERY_CARRIER_INVALID,
        "Delivery Carrier ID invalid must be
numeric 1 - 10."},
        {ERR_DELIVERY_MISSING_OCD_KEY,
        "Delivery missing Carrier ID key \"OCD*\"."},
        {ERR_DELIVERY_THREAD_FAILED,
        "Could not start delivery worker
thread."},
        {ERR_GETPROCADDR_FAILED,
        "Could not map proc in DLL. GetProcAddress
error. DLL="},
        {ERR_INVALID_SYNC_CONNECTION,
        "Invalid Terminal Sync ID."},
        {ERR_INVALID_TERMID,
        "Invalid Terminal ID."},
        {ERR_LOADDLL_FAILED,
        "Load of DLL failed. DLL="},
        {ERR_MAX_CONNECTIONS_EXCEEDED,
        "No connections available. Max Connections
is probably too low."},
        {ERR_MISSING_REGISTRY_ENTRIES,
        "Required registry entries are missing.
Rerun INSTALL to correct."},
        {ERR_NEWORDER_CUSTOMER_INVALID,
        "New Order customer id invalid
data type, range = 1 to 3000."},
        {ERR_NEWORDER_CUSTOMER_KEY,
        "New Order missing Customer key
\"CID*\"."},
        {ERR_NEWORDER_DISTRICT_INVALID,
        "New Order District ID Invalid
range 1 - 10."},
        {ERR_NEWORDER_FORM_MISSING_DID,
        "New Order missing District key
\"DID*\"."},
        {ERR_NEWORDER_ITEMID_INVALID,
        "New Order Item Id is wrong data type, must
be numeric."},
        {ERR_NEWORDER_ITEMID_RANGE,
        "New Order Item Id is out of
range. Range = 1 to 999999."},
        {ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
        "New Order Item_Id field entered without a
corresponding Supp_W."},
        {ERR_NEWORDER_MISSING_IID_KEY,
        "New Order missing Item Id key \"IID*\"."}
    };
}
```

```

    "Required key field is missing from HTML
string."
    {
        "Could not map proc in DLL. GetProcAddress
error. DLL="
        {
            ERR_HTML_ILL_FORMED,
            "Required key field is missing from HTML
string."
        },
        {
            ERR_INVALID_SYNC_CONNECTION,
            "Invalid Terminal Sync ID."
        },
        {
            ERR_INVALID_TERMID,
            "Invalid Terminal ID."
        },
        {
            ERR_LOADDLL_FAILED,
            "Load of DLL failed. DLL="
        },
        {
            ERR_MAX_CONNECTIONS_EXCEEDED,
            "No connections available. Max Connections
is probably too low."
        },
        {
            ERR_MISSING_REGISTRY_ENTRIES,
            "Required registry entries are missing.
Rerun INSTALL to correct."
        },
        {
            ERR_NEWORDER_CUSTOMER_INVALID,
            "New Order customer id invalid
data type, range = 1 to 3000."
        },
        {
            ERR_NEWORDER_CUSTOMER_KEY,
            "New Order missing Customer key
\"CID*\"."
        },
        {
            ERR_NEWORDER_DISTRICT_INVALID,
            "New Order District ID Invalid
range 1 - 10."
        },
        {
            ERR_NEWORDER_FORM_MISSING_DID,
            "New Order missing District key
\"DID*\"."
        },
        {
            ERR_NEWORDER_ITEMID_INVALID,
            "New Order Item Id is wrong data type, must
be numeric."
        },
        {
            ERR_NEWORDER_ITEMID_RANGE,
            "New Order Item Id is out of
range. Range = 1 to 999999."
        },
        {
            ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
            "New Order Item_Id field entered without a
corresponding Supp_W."
        },
        {
            ERR_NEWORDER_MISSING_IID_KEY,
            "New Order missing Item Id key \"IID*\"."
        }
    };
}
```

```

        },
        {
    ERR_NEORDER_MISSING_QTY_KEY,
    "New Order Missing Qty key \\"Qty##\\\"."
        },
        {
    ERR_NEORDER_MISSING_SUPPW_KEY,
    "New Order missing Supp_W key
\\\"SP##\\\"."
        },
        {
    ERR_NEORDER_NOITEMS_ENTERED,
    "New Order No order lines entered."
        },
        {
    ERR_NEORDER_QTY_INVALID,
    "New Order Qty invalid must be
numeric range 1 - 99."
        },
        {
            ERR_NEORDER_QTY_RANGE,
    "New Order Qty is out of range. Range = 1
to 99."
        },
        {
    ERR_NEORDER_QTY_WITHOUT_SUPPW,
    "New Order Qty field entered
without a corresponding Supp_W."
        },
        {
    ERR_NEORDER_SUPPW_INVALID,
    "New Order Supp_W invalid data
type must be numeric."
        },
        {
    ERR_NO_SERVER_SPECIFIED,
    "No Server name specified."
        },
        {
    ERR_ORDERSTATUS_CID_AND_CLT,
    "Order Status Only Customer ID or Last Name
may be entered, not both."
        },
        {
    ERR_ORDERSTATUS_CID_INVALID,
    "Order Status Customer ID invalid, range
must be numeric 1 - 3000."
        },
        {
    ERR_ORDERSTATUS_CLT_RANGE,
    "Order Status Customer last name
longer than 16 characters."
        },
        {
    ERR_ORDERSTATUS_DID_INVALID,
    "Order Status District invalid, value must
be numeric 1 - 10."
        },
        {
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    "Order Status Either Customer ID or Last
Name must be entered."
        },
        {
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    "Order Status missing Customer key

```

```

\\\"CID*\\\"."
        },
        {
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    "Order Status missing Customer Last Name
key \\\"CLT*\\\"."
        },
        {
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    "Order Status missing District key
\\\"DID*\\\"."
        },
        {
    ERR_PAYMENT_CDI_INVALID,
    "Payment Customer district
invalid must be numeric."
        },
        {
    ERR_PAYMENT_CID_AND_CLT,
    "Payment Only Customer ID or Last
Name may be entered, not both."
        },
        {
    ERR_PAYMENT_CUSTOMER_INVALID,
    "Payment Customer data type invalid, must
be numeric."
        },
        {
    ERR_PAYMENT_CWI_INVALID,
    "Payment Customer Warehouse
invalid, must be numeric."
        },
        {
    ERR_PAYMENT_DISTRICT_INVALID,
    "Payment District ID is invalid, must be 1
- 10."
        },
        {
    ERR_PAYMENT_HAM_INVALID,
    "Payment Amount invalid data type
must be numeric."
        },
        {
            ERR_PAYMENT_HAM_RANGE,
    "Payment Amount out of range, 0 - 9999.99."
        },
        {
    ERR_PAYMENT_LAST_NAME_TO_LONG,
    "Payment Customer last name
longer than 16 characters."
        },
        {
    ERR_PAYMENT_MISSING_CDI_KEY,
    "Payment missing Customer district key
\\\"CDI*\\\"."
        },
        {
    ERR_PAYMENT_MISSING_CID_CLT,
    "Payment Either Customer ID or Last Name
must be entered."
        },
        {
    ERR_PAYMENT_MISSING_CID_KEY,
    "Payment missing Customer Key \\\"CID*\\\"."
        },

```

```

    {
    ERR_PAYMENT_MISSING_CLT_KEY,
    "Payment missing Customer Last Name key
\\\"CLT*\\\"."
    },
    {
    ERR_PAYMENT_MISSING_CWI_KEY,
    "Payment missing Customer Warehouse key
\\\"CWI*\\\"."
    },
    {
    ERR_PAYMENT_MISSING_DID_KEY,
    "Payment missing District Key \\\"DID*\\\"."
    },
    {
    ERR_PAYMENT_MISSING_HAM_KEY,
    "Payment missing Amount key \\\"HAM*\\\"."
    },
    {
    ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
    "Stock Level; missing Threshold key
\\\"TT*\\\"."
    },
    {
    ERR_STOCKLEVEL_THRESHOLD_INVALID,
    "Stock Level; Threshold value must be in
the range = 1 - 99."
    },
    {
    ERR_STOCKLEVEL_THRESHOLD_RANGE,
    "Stock Level Threshold out of
range, range must be 1 - 99."
    },
    {
        ERR_VERSION_MISMATCH,
    "Invalid version field. RTE and Web Client
are probably out of sync."
    },
    {
        ERR_W_ID_INVALID,
    "Invalid Warehouse ID."
    },
    {
        0,
    }
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number." );
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {

```

```

errorMsgs[i].szMsg );
                strcpy( szTmp,
                break;
            }
            i++;
        }

        if (m_szTextDetail)
            strcat( szTmp, m_szTextDetail );
        if (m_SystemErr)
            wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

        m_szErrorText = new char[strlen(szTmp)+1];
        strcpy( m_szErrorText, szTmp );
        return m_szErrorText;
    }

/* FUNCTION: GetKeyValue
*
* PURPOSE:      This function parses a http
formatted string for specific key values.
*
* ARGUMENTS:    char
*               *pQueryString      http string from client
*               browser
*               char
*               *pKey              key
*               value to look for
*               char
*               *pValue             character array into which to place key's
value
*               int
*               iMax               maximum length of key value array.
*               WEBERROR           err
*               error value to throw
*
* RETURNS:     nothing.
*
* ERROR:       if (the pKey value is not found)
then
*               if
(err == 0)
*
*               return (empty string)
*
*               else
*
*               throw CWECLNT_ERR(err)
*
* COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*               TPC-C input
fields in such a manner that the keys can be
extracted in the
*               above manner.
*/

```

```

void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;
    iMax--; // one position is for terminating
null
    while( *ptr && *ptr != '&' && iMax)
    {
        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null
    *pQueryString = ptr;
    return;

ErrorExit:
    if (err != NO_ERR)
        throw new CWECLNT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
*
* PURPOSE:      This function parses a http
formatted string for a specific key value.
*
* ARGUMENTS:    char
*               *pQueryString      http string from client
*               browser
*               char
*               *pKey              key
*               value to look for
*               WEBERROR           NoKeyErr
*               error value to throw if
key not found
*               WEBERROR           NotIntErr
*               error value to throw if
value not numeric
*
* RETURNS:     integer
*
* ERROR:       if (the pKey value is not found)
then
*               if
(NoKeyErr != NO_ERR)
*
*               throw CWECLNT_ERR(err)
*
*               else
*
*               return 0
*
*               else if (non-
numeric char found) then
*
* COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*               TPC-C input
fields in such a manner that the keys can be
extracted in the
*               above manner.
*/
if
(NotIntErr != NO_ERR) then
*
    throw CWECLNT_ERR(err)
*
    else
*
    return 0
*
* COMMENTS:      http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*               TPC-C input
fields in such a manner that the keys can be
extracted in the
*
above manner.

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;
    ptr0 = ptr; // remember
starting point
// scan string until a terminator (null or
&) or a non-digit
while( *ptr && *ptr != '&' && isdigit(*ptr)
)
    ptr++;

// make sure we stopped scanning for the
right reason
if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
{
    if (NotIntErr != NO_ERR)
        throw new CWECLNT_ERR(
NoKeyErr );
    return 0;
}

*pQueryString = ptr;
return atoi(ptr0);

ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWECLNT_ERR( NoKeyErr
);
    return 0;
}

/* FUNCTION: TermInit
*
* PURPOSE:      This function initializes the
client terminal structure; it is called when the
TPCC.DLL
*/

```

```

/*
   is first loaded by the
   *
*/
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries =
Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {

        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNTERR(
ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData,
Term.iNumEntries * sizeof(CLIENTDATA) );

    Term.iFreeList =
Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets
set to -1, which marks it as "in use".
    // This is intentional, as the zero
entry is used as an anchor and never
    // allocated as an actual
terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree =
i-1;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
*
* PURPOSE: This function frees allocated
resources associated with the terminal structure.
*
* ARGUMENTS: none
*
* RETURNS: None
*
* COMMENTS: This function is called only when
the inet service unloads the TPCC.DLL
*/
void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)

```

```

    {
        if (Term.pClientData[i].iNextFree
== -1)
            delete
Term.pClientData[i].pTxn;
        }

        Term.iFreeList =
0;
        Term.iNumEntries =
0;
        if ( Term.pClientData )
            free(Term.pClientData);
        Term.pClientData = NULL;

        LeaveCriticalSection(&TermCriticalSection);
    }

/* FUNCTION: TermAdd
*
* PURPOSE: This function assigns a terminal
id which is used to identify a client browser.
*
* RETURNS: int
*           assigned terminal id
*/
int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;

        Term.pClientData[iNewTerm].iNextFree = -1;
        // indicates this position is in use
    }
    else
    {
        // no open slots, so find the
slot that hasn't been used in the longest time and
reuse it
        for(iNewTerm=1, i=1,
iTICKCOUNT=0x7FFFFFFF; i<Reg.dwMaxConnections; i++)
        {
            if (iTICKCOUNT >
Term.pClientData[i].iTICKCOUNT)
                iTICKCOUNT =
Term.pClientData[i].iTICKCOUNT;
            iTICKCOUNT = i;
        }
        // if oldest term is less than
one minute old, it probably means that more
connections
    }
}

```

```

        // are being attempted than were
specified as "Max Connections" at install. In this
case,
        // do not bump existing
connection; instead, return error to requestor.
        if ((GetTickCount() - iTickCount)
< 60000)
    {

        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNTERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
    }

    Term.pClientData[iNewTerm].iTICKCOUNT =
GetTickCount();
    Term.pClientData[iNewTerm].iSyncId =
Term.iMasterSyncId++;
    Term.pClientData[iNewTerm].pTxn = NULL;

    LeaveCriticalSection(&TermCriticalSection);
    return iNewTerm;
}

/* FUNCTION: TermDelete
*
* PURPOSE: This function makes a terminal
entry in the Term array available for reuse.
*
* ARGUMENTS: int
*           id
*           Terminal id of client exiting
*/
void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;

        // put onto free list
        EnterCriticalSection(&TermCriticalSection);
        Term.pClientData[id].iNextFree =
Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
*/
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer )
{

```

```

wsprintf(szBuffer,
        "<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\""
METHOD= \"GET\" >"           "<INPUT TYPE=\"hidden\""
NAME= \"STATUSID\" VALUE= \"%d\" >"           "<INPUT TYPE=\"hidden\""
NAME= \"ERROR\" VALUE= \"%d\" >"           "<INPUT TYPE=\"hidden\""
NAME= \"FORMID\" VALUE= \"%d\" >"           "<INPUT TYPE=\"hidden\""
NAME= \"TERMINID\" VALUE= \"%d\" >"           "<INPUT TYPE=\"hidden\""
NAME= \"SYNCID\" VALUE= \"%d\" >"           "<INPUT TYPE=\"hidden\""
        "<BOLD>An Error
Occurred</BOLD><BR><BR>
        "%s"
        "<BR><HR>"           "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".NewOrder..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Payment..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Delivery..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Order-Status..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Stock-Level..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Exit..\\\""
        "<INPUT TYPE=\"submit\""
        "</FORM></BODY></HTML>"
        , iType, iErrNum,
MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
 */
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm)
{
    wsprintf(szForm,
            "<HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
            "Select Desired
Transaction.<BR><HR>"           "<FORM ACTION=\"tpcc.dll\""
METHOD= \"GET\" >"           "<INPUT TYPE=\"hidden\""
NAME= \"STATUSID\" VALUE= \"0\\\""
        "<INPUT TYPE=\"hidden\""
NAME= \"ERROR\" VALUE= \"0\\\""
        "<INPUT TYPE=\"hidden\""
NAME= \"FORMID\" VALUE= \"%d\" >"           "<INPUT TYPE=\"hidden\""
NAME= \"TERMINID\" VALUE= \"%d\" >"           "<INPUT TYPE=\"hidden\""
NAME= \"SYNCID\" VALUE= \"%d\" >"           "<INPUT TYPE=\"hidden\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".NewOrder..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Payment..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Delivery..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Order-Status..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Stock-Level..\\\""
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \".Exit..\\\""
        "<INPUT TYPE=\"submit\""
        "</FORM></BODY></HTML>"
        , iType, iErrNum,
MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
}

```

```

        "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Delivery..\\">"           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Order_Status..\\">"          "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Stock_Level..\\">"          "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Exit..\\">"                  "</FORM></BODY></HTML>"      , MAIN_MENU_FORM, iTermId,
iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*
* PURPOSE: This function constructs the Stock Level HTML page.
*
* COMMENTS: The internal client buffer is created when the terminal id is assigned and should not
*           be freed except when the client terminal id is no longer needed.
*/
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm)
{
    int c;

    c = wsprintf(szForm,
                 "<HTML><HEAD><TITLE>TPC-C Stock
Level</TITLE></HEAD><FORM ACTION=\\"tpcc.dll\\"
METHOD=\\"GET\\\">"                                "<INPUT TYPE=\\"hidden\\"
NAME=\\"STATUSID\\\" VALUE=\\"0\\\">"                "<INPUT TYPE=\\"hidden\\"
NAME=\\"ERROR\\\" VALUE=\\"0\\\">"                   "<INPUT TYPE=\\"hidden\\"
NAME=\\"FORMID\\\" VALUE=\\"%d\\\">"                 "<INPUT TYPE=\\"hidden\\"
NAME=\\"TERMID\\\" VALUE=\\"%d\\\">"                 "<INPUT TYPE=\\"hidden\\"
NAME=\\"SYNCID\\\" VALUE=\\"%d\\\">"                 "<PRE><font face=\\"Courier\\>
Stock-Level<BR>"                                "Warehouse: %6.6d District:
%2.2d<BR> <BR> ,                      STOCK_LEVEL_FORM, iTermId,
Term.pClientData[iTermId].iSyncid,
Term.pClientData[iTermId].w_id,
Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
               "Stock Level Threshold:
<INPUT NAME=\\"TT*\\\" SIZE=2><BR> <BR>"
               "low stock:
</font><BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> "

```

```

<BR> <BR> <BR></PRE><HR>
NAME=\ "CMD\" VALUE=\ "Process\ ">
NAME=\ "CMD\" VALUE=\ "Menu\ ">
}
else
{
    wsprintf(szForm+c,
        "Stock Level Threshold:
%2.2d<BR> <BR>"                                " low stock:
%3.3d</font> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>"                                              " <BR> <BR> <BR> <BR>
<BR> <BR> <BR></PRE><HR>
<BR> <BR> <BR></PRE><HR>
NAME=\ "CMD\" VALUE=\ "..NewOrder..\">
NAME=\ "CMD\" VALUE=\ "..Payment..\">
NAME=\ "CMD\" VALUE=\ "..Delivery..\">
NAME=\ "CMD\" VALUE=\ "..Order_Status..\">
NAME=\ "CMD\" VALUE=\ "..Stock_Level..\">
NAME=\ "CMD\" VALUE=\ "..Exit..\">
                                                "</FORM></HTML>"
                                                , pStockLevelData-
>threshold, pStockLevelData->low_stock);
}

/* FUNCTION: MakeNewOrderForm
 *
 * COMMENTS:          The internal client buffer is
created when the terminal id is assigned and should
not
 *                                     be freed
except when the client terminal id is no longer
needed.
 */

void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm)
{
    int                               i, c;
    BOOL                             bValid;
    static   char szBR[] = " <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> ";
    if (!bInput)
        assert( pNewOrderData-
>exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem );

    bValid = (bInput || (pNewOrderData-
>exec_status_code == eOK));

```

```

c = wsprintf(szForm,
    "<HTML><HEAD><TITLE>TPC-C New
Order</TITLE></HEAD><BODY>" 
    "<FORM ACTION=\\"tpcc.dll\\"
METHOD=\\"GET\\\" >" 
        "<INPUT TYPE=\\"hidden\\"
NAME=\\"STATUSID\\\" VALUE=\\"%d\\\" >" 
        "<INPUT TYPE=\\"hidden\\"
NAME=\\"ERROR\\\" VALUE=\\"0\\\" >" 
        "<INPUT TYPE=\\"hidden\\"
NAME=\\"FORMID\\\" VALUE=\\"%d\\\" >" 
        "<INPUT TYPE=\\"hidden\\"
NAME=\\"TERMID\\\" VALUE=\\"%d\\\" >" 
        "<INPUT TYPE=\\"hidden\\"
NAME=\\"SYNCID\\\" VALUE=\\"%d\\\" >" 
        "<PRE><font face=\\"Courier\\\">
New Order<BR>" 
            , bValid ? 0 : ERR_BAD_ITEM_ID,
NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermid].iSyncId);

if ( bInput )
{
    c += wsprintf(szForm+c,
"Warehouse: %6.6d ", Term.pClientData[iTermid].w_id
);

    strcpy( szForm+c,
            "District: <INPUT
NAME=\\"DID*\\\" SIZE=1>
Date:<BR\\\" >" 
                "Customer: <INPUT
NAME=\\"CID*\\\" SIZE=4> Name:
Credit: %Disc:<BR>" 
                    "Order Number:
Number of Lines: W_tax: D_tax:<BR>
<BR\\\" >" 
                " Supp_W Item_Id Item
Name Qty Stock B/G Price
Amount<BR\\\" >" 
                    " <INPUT
NAME=\\"SP00*\\\" SIZE=4> <INPUT NAME=\\"IID00*\\\"
SIZE=6> <INPUT
NAME=\\"Qty00*\\\" SIZE=1><BR\\\" >" 
                    " <INPUT
NAME=\\"SP01*\\\" SIZE=4> <INPUT NAME=\\"IID01*\\\"
SIZE=6> <INPUT
NAME=\\"Qty01*\\\" SIZE=1><BR\\\" >" 
                    " <INPUT
NAME=\\"SP02*\\\" SIZE=4> <INPUT NAME=\\"IID02*\\\"
SIZE=6> <INPUT
NAME=\\"Qty02*\\\" SIZE=1><BR\\\" >" 
                    " <INPUT
NAME=\\"SP03*\\\" SIZE=4> <INPUT NAME=\\"IID03*\\\"
SIZE=6> <INPUT
NAME=\\"Qty03*\\\" SIZE=1><BR\\\" >" 
                    " <INPUT
NAME=\\"SP04*\\\" SIZE=4> <INPUT NAME=\\"IID04*\\\"
SIZE=6> <INPUT
NAME=\\"Qty04*\\\" SIZE=1><BR\\\" >" 
                    " <INPUT
NAME=\\"SP05*\\\" SIZE=4> <INPUT NAME=\\"IID05*\\\""

```

```

SIZE=6> <INPUT
NAME=\\"Qty05*\\\" SIZE=1><BR>" 
                    " <INPUT
NAME=\\"SP06*\\\" SIZE=4> <INPUT NAME=\\"IID06*\\\"
SIZE=6> <INPUT
NAME=\\"Qty06*\\\" SIZE=1><BR>" 
                    " <INPUT
NAME=\\"SP07*\\\" SIZE=4> <INPUT NAME=\\"IID07*\\\"
SIZE=6> <INPUT
NAME=\\"Qty07*\\\" SIZE=1><BR>" 
                    " <INPUT
NAME=\\"SP08*\\\" SIZE=4> <INPUT NAME=\\"IID08*\\\"
SIZE=6> <INPUT
NAME=\\"Qty08*\\\" SIZE=1><BR>" 
                    " <INPUT
NAME=\\"SP09*\\\" SIZE=4> <INPUT NAME=\\"IID09*\\\"
SIZE=6> <INPUT
NAME=\\"Qty09*\\\" SIZE=1><BR>" 
                    " <INPUT
NAME=\\"SP10*\\\" SIZE=4> <INPUT NAME=\\"IID10*\\\"
SIZE=6> <INPUT
NAME=\\"Qty10*\\\" SIZE=1><BR>" 
                    " <INPUT
NAME=\\"SP11*\\\" SIZE=4> <INPUT NAME=\\"IID11*\\\"
SIZE=6> <INPUT
NAME=\\"Qty11*\\\" SIZE=1><BR>" 
                    " <INPUT
NAME=\\"SP12*\\\" SIZE=4> <INPUT NAME=\\"IID12*\\\"
SIZE=6> <INPUT
NAME=\\"Qty12*\\\" SIZE=1><BR>" 
                    " <INPUT
NAME=\\"SP13*\\\" SIZE=4> <INPUT NAME=\\"IID13*\\\"
SIZE=6> <INPUT
NAME=\\"Qty13*\\\" SIZE=1><BR>" 
                    " <INPUT
NAME=\\"SP14*\\\" SIZE=4> <INPUT NAME=\\"IID14*\\\"
SIZE=6> <INPUT
NAME=\\"Qty14*\\\" SIZE=1><BR>" 
                    " Execution Status:
Total:<BR\\\" >" 
                    " </font><PRE><HR>
                    " <INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"Process\\\" >" 
                    " <INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"Menu\\\" >" 
                    " </FORM></HTML>
);
}
else
{
    c += wsprintf(szForm+c,
"Warehouse: %6.6d District: %2.2d
Date: ", 
                    pNewOrderData->w_id,
                    pNewOrderData->d_id);

    if ( bValid )
    {
        c += wsprintf(szForm+c,
"%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
                    pNewOrderData->o_entry_d.day,

```

```

pNewOrderData->o_entry_d.month,
pNewOrderData->o_entry_d.year,
pNewOrderData->o_entry_d.hour,
pNewOrderData->o_entry_d.minute,
pNewOrderData->o_entry_d.second);
}

c += wsprintf(szForm+c,
"<BR>Customer: %4.4d Name: %-16s Credit: %-2s",
                    pNewOrderData->c_id,
pNewOrderData->c_last, pNewOrderData->c_credit);

if ( bValid )
{
    c += sprintf(szForm+c,
"%%Disc: %5.2f <BR\\\" >" 
                    "Order Number: %8.8d Number of Lines:
%2.2d W_tax: %5.2f D_tax: %5.2f <BR> <BR>" 
                    " Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>",
                    100.0*pNewOrderData->c_discount,
                    pNewOrderData->o_id,
                    pNewOrderData->o_ol_cnt,
                    100.0 *
pNewOrderData->w_tax,
                    100.0 *
pNewOrderData->d_tax);

for(i=0;
i<pNewOrderData->o_ol_cnt; i++)
{
    c +=
sprintf(szForm+c, "%6.6d %6.6d %-24s %2.2d
%3.3d %1.1s $%6.2f $%7.2f <BR>",
                    pNewOrderData->OL[i].ol_supply_w_id,
                    pNewOrderData->OL[i].ol_i_id,
                    pNewOrderData->OL[i].ol_i_name,
                    pNewOrderData->OL[i].ol_quantity,
                    pNewOrderData->OL[i].ol_stock,
                    pNewOrderData->OL[i].ol_brand_generic,
                    pNewOrderData->OL[i].ol_i_price,
                    pNewOrderData->OL[i].ol_amount );
}
}

```

```

        }
    else
    {
        c += wsprintf(szForm+c,
                      "%Disc:<BR>"           "Order
Number: %8.8d Number of Lines:          W_tax:
D_tax:<BR> <BR>"                                " Supp_W
Item_Id Item Name          Qty Stock B/G
Price   Amount<BR>"                                     ,
pNewOrderData->o_id);

                i = 0;
            }

            strncpy( szForm+c, szBR, (15-i)*5
);
            c += (15-i)*5;

            if ( bValid )
                c += sprintf(szForm+c,
"Execution Status: Transaction committed.
Total: $%8.2f ",

pNewOrderData->total_amount);
            else
                c += wsprintf(szForm+c,
"Execution Status: Item number is not valid.
Total:");

            strcpy(szForm+c,
"
<BR></font></PRE><HR>"                               "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..NewOrder..\">"                  "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Payment..\">"                   "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Delivery..\">"                  "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Order_Status..\">"               "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Stock_Level..\">"                "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Exit..\">"                      "</FORM></HTML>"
);
        }
    }

/* FUNCTION: MakePaymentForm
*
* COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
*                           be freed
except when the client terminal id is no longer
needed.
*/

```

```

void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm)
{
    int c;

    c = wsprintf(szForm,
                  "<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"           "Order
METHOD="GET"">"                         "<INPUT TYPE=\"hidden\""
NAME="STATUSID" VALUE="0"">"           "<INPUT TYPE=\"hidden\""
NAME="ERROR" VALUE="0"">"                 "<INPUT TYPE=\"hidden\""
NAME="FORMID" VALUE="%d"">"             "<INPUT TYPE=\"hidden\""
NAME="TERMID" VALUE="%d"">"             "<INPUT TYPE=\"hidden\""
NAME="SYNCID" VALUE="%d"">"             "<PRE><font face="Courier">
Payment<BR>"                               "Date: "
                                            , PAYMENT_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

    if ( !bInput )
    {
        c += wsprintf(szForm+c, "%2.2d-
%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
pPaymentData->h_date.day,
pPaymentData->h_date.month,
pPaymentData->h_date.year,
pPaymentData->h_date.hour,
pPaymentData->h_date.minute,
pPaymentData->h_date.second);
    }

    if ( bInput )
    {
        c += wsprintf(szForm+c,
                      "<BR> <BR>Warehouse:
%6.6d"                                         "Customer: <INPUT
NAME="CID*" SIZE=4>"                     "Cust-Warehouse: <INPUT
NAME="CWI*" SIZE=4>"                      "Cust-District: <INPUT
NAME="CDI*" SIZE=1><BR>"                  "Name:
<INPUT NAME="CLT*" SIZE=16>
Since:<BR>"                                 "
Credit:<BR>"                                "

```

```

Disc:<BR>"                                "
Phone:<BR> <BR>"                         "Amount Paid:
$<INPUT NAME="HAM*" SIZE=7>           New Cust-
Balance:<BR>"                                "Credit Limit:<BR>
<BR>Cust-Data: <BR> <BR> <BR> <BR>
<BR></font></PRE><HR>"                  "<INPUT TYPE=\"submit\""
NAME="CMD" VALUE="Process"><INPUT TYPE="submit""
NAME="CMD" VALUE="Menu">"              "</BODY></FORM></HTML>

Term.pClientData[iTermId].w_id);
}
else
{
    c += wsprintf(szForm+c,
                  "<BR> <BR>Warehouse:
%6.6d"                                         District: %2.2d<BR>
"%-20s"                                         "%-20s
%-20s<BR>"                                    "%-20s
%-20s<BR>"                                    "%-20s
%-20s %-2s %5.5s-%4.4s<BR>"               "%-20s %-2s %5.5s-%4.4s
%-20s %-2s %5.5s-%4.4s<BR>"               "Customer: %4.4d Cust-
Warehouse: %6.6d Cust-District: %2.2d<BR>"   "Name: %16s %-2s %-
16s Since: %2.2d-%2.2d-%4.4d<BR>"         "%-20s
Credit: %-2s<BR>"                          "%-20s

Term.pClientData[iTermId].w_id, pPaymentData->d_id
, pPaymentData->w_street_1, pPaymentData->d_street_1
, pPaymentData->w_street_2, pPaymentData->d_street_2
, pPaymentData->w_state, pPaymentData->w_city,
pPaymentData->w_zip5
, pPaymentData->d_city,
pPaymentData->d_state, pPaymentData->d_zip,
pPaymentData->d_zip5
, pPaymentData->c_id,
pPaymentData->c_w_id, pPaymentData->c_d_id
, pPaymentData->c_first, pPaymentData->c_middle, pPaymentData-
>c_last
, pPaymentData->c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
, pPaymentData->c_street_1, pPaymentData->c_credit
);

c += sprintf(szForm+c,
                  "%Disc: %5.2f<BR>",           "%-20s
%%Disc: %5.2f<BR>"
```

```

    " <HR><INPUT
TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\\"Process\\" ><INPUT
TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\\"Menu\\" >""
    "</BODY></FORM></HTML>"
```

);
 }
 else
 {
 c += wsprintf(szForm+c,
 "District: %2.2d
"
 "Customer: %4.4d
Name: %-16s %2s %-16s
",
pOrderStatusData->d_id,
pOrderStatusData-
>c_first, pOrderStatusData->c_middle,
pOrderStatusData->c_last);

 c += sprintf(szForm+c, "Cust-
Balance: \$%9.2f

",
pOrderStatusData-
>c_balance);

 c += wsprintf(szForm+c,
 "Order-Number: %8.8d
Entry-Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d
Carrier-Number: %2.2d
"
 "Supply-W Item-Id
Qty Amount Delivery-Date=
",
pOrderStatusData->o_id,
pOrderStatusData-
>o_entry_d.day,
pOrderStatusData-
>o_entry_d.month,
pOrderStatusData-
>o_entry_d.year,
pOrderStatusData-
>o_entry_d.hour,
pOrderStatusData-
>o_entry_d.minute,
pOrderStatusData-
>o_entry_d.second,
pOrderStatusData-
>o_carrier_id);

 for(i=0; i< pOrderStatusData-
>o.ol_cnt; i++)
 {
 c += sprintf(szForm+c,
 "%6.6d %6.6d %2.2d \$%8.2f %2.2d-
\$2.2d-%4.4d
",
pOrderStatusData->OL[i].ol_supply_w_id,
pOrderStatusData->OL[i].ol_i_id,
pOrderStatusData->OL[i].ol_quantity,
pOrderStatusData->OL[i].ol_amount,
pOrderStatusData->OL[i].ol_delivery_d.day,

```

    pOrderStatusData-
>OL[i].ol_delivery_d.month,
    pOrderStatusData-
>OL[i].ol_delivery_d.year);
}

        strncpy( szForm+c, szBR, (15-i)*5
);

        c += (15-i)*5;

        strcpy(szForm+c,
"
</font></PRE><HR><INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..NewOrder..\\">
        "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Payment..\\">
        "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Delivery..\\">
        "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Order-Status..\\">
        "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Stock-Level..\\">
        "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Exit..\\">
        "</BODY></FORM></HTML>"
```

);
}
}

/* FUNCTION: MakeDeliveryForm
 *
 * COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
 *
 be freed
except when the client terminal id is no longer
needed.
 */
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm)
{
 int c;

 c = wsprintf(szForm,
 "<HTML><HEAD><TITLE>TPC-C
Delivery</TITLE></HEAD><BODY>"
 "<FORM ACTION=\\"tpcc.dll\\"
METHOD=\\"GET\\\">
 "<INPUT TYPE=\\"hidden\\"
NAME=\\"STATUSID\\\" VALUE=%d\\\">
 "<INPUT TYPE=\\"hidden\\"
NAME=\\"ERROR\\\" VALUE=\\"0\\\">
 "<INPUT TYPE=\\"hidden\\"
NAME=\\"FORMID\\\" VALUE=%d\\\">
 "<INPUT TYPE=\\"hidden\\"
NAME=\\"TERMID\\\" VALUE=%d\\\">
 "<INPUT TYPE=\\"hidden\\"
NAME=\\"SYNCID\\\" VALUE=%d\\\">
 "<PRE>
Delivery
"

```

    "Warehouse: $6.6d<BR> <BR>" ,
    (!bInput && (pDeliveryData-
>exec_status_code != eOK) ) ? ERR_TYPE_DELIVERY_POST :
0,
                DELIVERY_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);

        if ( bInput )
        {
            strcpy( szForm+c,
                    "Carrier Number: <INPUT
NAME=\\"OCD*\\\" SIZE=1><BR> <BR>
                    "Execution Status: <BR>
<BR> <BR> <BR> <BR> <BR> <BR>
                    "<BR> <BR> <BR> <BR> </font></PRE><HR>
                    "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"Process\\\">"
                    "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"Menu\\\">
                    "</BODY></FORM></HTML>" );
        }
        else
        {
            wsprintf( szForm+c,
                    "Carrier Number:
%2.2d<BR> <BR>
                    "Execution Status: %s
<BR> <BR> <BR> <BR> <BR> <BR> <BR>
                    "<BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE>
                    "<HR><INPUT
TYPE=\\"submit\\" NAME=\\"CMD\\\" VALUE=\\"..NewOrder..\\\">
                    "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Payment..\\\">
                    "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Delivery..\\\">
                    "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Order-Status..\\\">
                    "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Stock-Level..\\\">
                    "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Exit..\\\">
                    "</BODY></FORM></HTML>" );
        }
    }

/* FUNCTION: ProcessNewOrderForm
 *
 * PURPOSE:          This function gets and validates
the input data from the new order form
 *                      filling in the required
input variables. it then calls the SQLNewOrder

```

```

*                                     transaction, constructs
the output form and writes it back to client
*                                     browser.
*/

void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
    *pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA pNewOrder;

    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();

    ZeroMemory(pNewOrder,
sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id =
Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString,
pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder,
OUTPUT_FORM, szBuffer );
}

/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE: This function gets and validates
the input data from the payment form
*                                     filling in the required
input variables. It then calls the SQLPayment
*                                     transaction, constructs
the output form and writes it back to client
*                                     browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
    *pECB     passed in structure pointer from
inetsrv.
*
*                                     int
    iTermId   client browser terminal id
*/
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA pPayment;

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id =
Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString,
pPayment);
}

```

```

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE: This function gets and validates
the input data from the Order Status
*           form filling in the
required input variables. It then calls the
*           SQLOrderStatus
transaction, constructs the output form and writes it
*           back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*           *pECB passed in structure pointer from
inetsrv.
*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus,
sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id =
Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString,
pOrderStatus);

    Term.pClientData[iTermId].pTxn-
>OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE: This function gets and validates
the input data from the delivery form
*           filling in the required
input variables. It then calls the PostDeliveryInfo
*           Api, The client is then
informed that the transaction has been posted.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*           *pECB passed in structure pointer from
inetsrv.

```

```

*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB->lpszQueryString;
    PDELIVERY_DATA pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    ZeroMemory(pDelivery,
sizeof(DELIVERY_DATA));
    pDelivery->w_id =
Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id =
GetIntKeyValue(&ptr, "OCD",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALIDID);
    if ( pDelivery->o_carrier_id > 10 || 
pDelivery->o_carrier_id < 1 )
        throw new CWEBCNLT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if ( dwNumDeliveryThreads )
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery-
>w_id, pDelivery->o_carrier_id) )
            pDelivery-
>exec_status_code = eDeliveryFailed;
        else
            pDelivery-
>exec_status_code = eOK;
    }
    else // delivery is done synchronously if
no delivery threads configured
    Term.pClientData[iTermId].pTxn-
>Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
*
* PURPOSE: This function gets and validates
the input data from the Stock Level
*           form filling in the
required input variables. It then calls the
*           SQLStockLevel
transaction, constructs the output form and writes it
*           back to client browser.
*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB-
>lpszQueryString;
    PSTOCK_LEVEL_DATA pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory(pStockLevel,
sizeof(STOCK_LEVEL_DATA) );
    pStockLevel->w_id =
Term.pClientData[iTermId].w_id;
    pStockLevel->d_id =
Term.pClientData[iTermId].d_id;
    pStockLevel->threshold =
GetIntKeyValue(&ptr, "TT",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALIDID);
    if ( pStockLevel->threshold >= 100 ||
pStockLevel->threshold < 0 )
        throw new CWEBCNLT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn-
>StockLevel();

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
*
* PURPOSE: This function extracts and
validates the new order form data from an http
command string.
*
* ARGUMENTS: LPSTR
*           lpszQueryString           client
browser http command string
*
*           NEW_ORDER_DATA *pNewOrderData
pointer to new order data structure
*
*           int
*
*           iTermId client browser terminal id
*/

```

```

void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData)
{
    char     szTmp[26];
    int         i;
    short    items;
    int         ol_i_id, ol_quantity;
    char     *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6]
= {
        { "SP00*", "SP01*", "SP02*",
"SP03*", "SP04*", "SP05*", "SP06*", "SP07*",
"SP08*", "SP09*", "SP10*", "SP11*", "SP12*",
"SP13*", "SP14*" };
        static char
szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "IID00*", "IID01*", "IID02*",
"IID03*", "IID04*", "IID05*", "IID06*", "IID07*",
"IID08*", "IID09*", "IID10*", "IID11*", "IID12*",
"IID13*", "IID14*" };
        static char
szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "Qty00*", "Qty01*", "Qty02*",
"Qty03*", "Qty04*", "Qty05*", "Qty06*", "Qty07*",
"Qty08*", "Qty09*", "Qty10*", "Qty11*", "Qty12*",
"Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_NEORDER_FORM_MISSING_DID,
ERR_NEORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr,
"CID*", ERR_NEORDER_CUSTOMER_KEY,
ERR_NEORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS;
i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp,
sizeof(szTmp), ERR_NEORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp) )
                throw new
CWEBCLNT_ERR( ERR_NEORDER_SUPPW_INVALID );
            pNewOrderData-
>OL[items].ol_supply_w_id = atoi(szTmp);
            ol_i_id =
pNewOrderData->OL[items].ol_i_id =
GetIntKeyValue(&ptr, szIID[i],
ERR_NEORDER_MISSING_IID_KEY,
ERR_NEORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999
|| ol_i_id < 1 )

```

```

            throw new
CWEBCLNT_ERR( ERR_NEORDER_ITEMID_RANGE );
            ol_quantity =
pNewOrderData->OL[items].ol_quantity =
GetIntKeyValue(&ptr, szQty[i],
ERR_NEORDER_MISSING_QTY_KEY,
ERR_NEORDER_QTY_INVALID);
            if ( ol_quantity > 99
|| ol_quantity < 1 )
                throw new
CWEBCLNT_ERR( ERR_NEORDER_QTY_RANGE );
            items++;
        }
        else
        {
            // nothing entered for
supply warehouse, so item id and qty must also be
blank
            GetKeyValue(&ptr,
szIID[i], szTmp, sizeof(szTmp),
ERR_NEORDER_MISSING_IID_KEY);
            if ( szTmp[0] )
                throw new
CWEBCLNT_ERR( ERR_NEORDER_ITEMID_WITHOUT_SUPPW );
            GetKeyValue(&ptr,
szQty[i], szTmp, sizeof(szTmp),
ERR_NEORDER_MISSING_QTY_KEY);
            if ( szTmp[0] )
                throw new
CWEBCLNT_ERR( ERR_NEORDER_QTY_WITHOUT_SUPPW );
        }
        if ( items == 0 )
            throw new CWEBCLNT_ERR(
ERR_NEORDER_NOITEMS_ENTERED );
        pNewOrderData->o.ol_cnt = items;
    }

/* FUNCTION: GetPaymentData
*
* PURPOSE: This function extracts and
validates the payment form data from an http command
string.
*
* ARGUMENTS: LPSTR
lpszQueryString           client
browser http command string
*          *pPaymentData           PAYMENT_DATA
payment data structure
*/
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData)
{
    char     szTmp[26];
    char     *ptr = lpszQueryString;
    BOOL    bCustIdBlank;
    int         iLen;

```

```

    pPaymentData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        bCustIdBlank = TRUE;
        pPaymentData->c_id = 0;
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        bCustIdBlank = FALSE;
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
        pPaymentData->c_id = atoi(szTmp);
    }

    pPaymentData->c_w_id = GetIntKeyValue(&ptr,
"CWI*", ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
    pPaymentData->c_d_id = GetIntKeyValue(&ptr,
"CDI*", ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_CDI_INVALID);

    if ( bCustIdBlank )
    {
        // customer id is blank, so last
name must be entered
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );
        _strupr( szTmp );
        if ( strlen(szTmp) >
LAST_NAME_LEN )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );
        strcpy(pPaymentData->c_last,
szTmp);
        // pad with spaces so that the
client layer doesn't have to do it
        // before passing parameters to
stored procedure
        iLen = strlen(pPaymentData-
>c_last);
        memset(pPaymentData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
        pPaymentData-
>c_last[LAST_NAME_LEN] = 0;
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )

```

```

        throw new CWEBCNT_ERR(
ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
    if ( !IsDecimal(szTmp) )
        throw new CWEBCNT_ERR(
ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
        throw new CWEBCNT_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
*
* PURPOSE: This function extracts and
validates the payment form data from an http command
string.
*/
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData)
{
    char      szTmp[26];
    char      *ptr = lpszQueryString;
    int       iLen;

    pOrderStatusData->d_id =
GetIntKeyValue(&ptr, "DID",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last
name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(szTmp) >
LAST_NAME_LEN )
            throw new CWEBCNT_ERR(
ERR_ORDERSTATUS_CLT_RANGE );

        strcpy(pOrderStatusData->c_last,
szTmp);
        // pad with spaces so that the
client layer doesn't have to do it
        // before passing parameters to
stored procedure
        iLen = strlen(pOrderStatusData-
>c_last);
        memset(pOrderStatusData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
    }
}

```

```

        pOrderStatusData-
>c_last[LAST_NAME_LEN] = 0;
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWEBCNT_ERR(
ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id =
atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCNT_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }

/* FUNCTION: BOOL IsNumeric(char *ptr)
*
* PURPOSE: This function determines if a
string is numeric. It fails if any characters other
than numeric and null
terminator are present.
*
* ARGUMENTS:     char
*                  *ptr     pointer to string to check.
*
* RETURNS:        BOOL     FALSE     if
string is not all numeric
*
*                  TRUE     if string contains only numeric
characters i.e. '0' - '9'
*/
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
*
* PURPOSE: This function determines if a
string is a non-negative decimal value.
*
* It fails if any characters other than a
series of numbers followed by
        a decimal point,
another series of numbers, and a null terminator are
present.
*
* ARGUMENTS:     char
*                  *ptr     pointer to string to check.
*
* RETURNS:        BOOL     FALSE     if
string is not a valid non-negative decimal value
*/

```

```

*          TRUE     if string is OK
*/
BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if ( dotptr == NULL )
        // no decimal point, so just
check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace
decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if ( *(dotptr+1) == 0 )
        return FALSE; // nothing but a
decimal point is bad
    else
        bValid = TRUE;

    if ( *(dotptr+1) != 0 )
        // check text after decimal point
        bValid &= IsNumeric(dotptr+1);

    *dotptr = '.'; // replace decimal point
    return bValid;
}

```

tpcc.def

LIBRARY TPCC.DLL

EXPORTS

```

GetExtensionVersion @1
HttpExtensionProc @2
TerminateExtension @3

```

tpcc.h

```

/* FILE:           TPCC.H
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99

```

```

/*
 * PURPOSE: Header file for ISAPI TPCC.DLL,
 defines structures and functions used in the isapi
 tpcc.dll.
 */
//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE 101
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#define TP_MAX_RETRIES 50

//note that the welcome form must be processed first
as terminal ids assigned here, once the
//terminal id is assigned then the forms can be
processed in any order.
#define WELCOME_FORM
    1
        //beginning form no term id assigned, form
id
#define MAIN_MENU_FORM
    2
        //term id assigned main menu form id
#define NEW_ORDER_FORM
    3
        //new order form id
#define PAYMENT_FORM
    4
        //payment form id
#define DELIVERY_FORM
    5
        //delivery form id
#define ORDER_STATUS_FORM
    6
        //order
status id
#define STOCK_LEVEL_FORM
    7
        //stock level
form id

//This macro is used to prevent the compiler error
unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _CLIENTDATA
{
    int
        iNextFree;
        //index of
next free element or -1 if this entry in use.
    int
        w_id;
        //warehouse
id assigned at welcome form

```

```

        int
            d_id;
            //district id
assigned at welcome form

        int
            iSyncId;
            //synchronization id
        int
            iTickCount;
            //time of
last access;

        CTPCC_BASE
            *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational
interface for terminal id support
typedef struct _TERM
{
    int
        iNumEntries;
        //total allocated terminal array entries
    int
        iFreeList;
        //next available terminal array element or
-1 if none
    int
        iMasterSyncId;
        //synchronization id
    CLIENTDATA
        *pClientData;
        //pointer to
allocated client data
} TERM;

typedef TERM *PTERM;
                    //pointer to
terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADDLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,
    ERR_NEWORDER_CUSTOMER_INVALID,
    ERR_NEWORDER_CUSTOMER_KEY,
    ERR_NEWORDER_DISTRICT_INVALID,
    ERR_NEWORDER_FORM_MISSING_DID,
    ERR_NEWORDER_ITEMID_INVALID,
    ERR_NEWORDER_ITEMID_RANGE,

```

```

ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CID_INVALID,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNTErr : public CBaseErr
{
public:
    CWEBCLNTErr(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    }

    CWEBCLNTErr(WEBERROR Err, char
*szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
szTextDetail );
    }
}
```

```

dwSystemErr;
{
    m_SystemErr =
        m_szErrorText = NULL;
};

~CWEBCLNT_ERR()
{
    if (m_szTextDetail != NULL)
        delete [];

m_szTextDetail;
    if (m_szErrorText != NULL)
        delete [];

m_szErrorText;
};

WEBERROR m_Error;
char *m_szTextDetail; // char
*m_szErrorText;
DWORD m_SystemErr;

int ErrorType() { return
ERR_TYPE_WEBDLL; }
char *ErrorTypeStr() { return
"WEBCLIENT"; }
int ErrorNum() { return m_Error; }
char *ErrorText();
};

//These constants have already been defined in
engstut.h, but since we do
// not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6
//used to record a warning into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncid);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int
iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err);

```

```

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(long w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);
// Separate function to be able to use Win32
exception handling in
// HttpExtensionProc.
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId);

```

tpcc.rc

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
///////////////////////////////
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

///////////////////////////////
//undef APSTUDIO_READONLY_SYMBOLS
///////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#define _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifndef _MAC
///////////////////////////////
///////////////////////////////
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904b0"
BEGIN
VALUE "Comments", "TPC-C HTML DLL"
Server\0
VALUE "CompanyName", "Microsoft\0"
VALUE "FileDescription", "TPC-C HTML DLL"
Server\0
VALUE "FileVersion", "0, 4, 0, 0\0"
VALUE "InternalName", "tpcc\0"
VALUE "LegalCopyright", "Copyright ©
1997\0"
VALUE "OriginalFilename", "tpcc.dll\0"
VALUE "ProductName", "Microsoft tpcc\0"
VALUE "ProductVersion", "0, 4, 0, 0\0"
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200
END
END
#endif // !_MAC

```

```

#ifndef APSTUDIO_INVOKED
///////////////
// TEXTINCLUDE
// TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"afxres.h\"\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

///////////////
// Dialog
//

IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON "OK",IDOK,129,7,50,14
    PUSHBUTTON "Cancel",IDCANCEL,129,24,50,14
END

///////////////
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
#endif // APSTUDIO_INVOKED

```

```

#endif // English (U.S.) resources
///////////////

#ifndef APSTUDIO_INVOKED
///////////////
// Generated from the TEXTINCLUDE 3 resource.
//



///////////////
//endif // not APSTUDIO_INVOKED



---



tpcc_com.cpp



---



```

/* FILE: TPCC_COM.CPP
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * not yet
audited
*
* PURPOSE: Source file for TPC-C COM+ class
implementation.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/
/*
needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec(dllexport)

#include "...\\common\\src\\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "...\\common\\src\\error.h"
#include "...\\common\\src\\txm_base.h"
#include "...\\common\\src\\tpcc_com_errorcode.h"
#include "tpcc_com.h"

#include "...\\tpcc_com_ps\\src\\tpcc_com_ps_i.c"
#include "...\\tpcc_com_all\\src\\tpcc_com_all_i.c"
// wrapper routine for class constructor
__declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL
bSinglePool)

```


```

```

{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray =
SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray-
>pvData,0,ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL,
COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC,
NULL, CLSCTX_SERVER, IID_ITPCC, (void
**)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same
component
        m_pPayment = m_pNewOrder;
        m_pStockLevel = m_pNewOrder;
        m_pOrderStatus = m_pNewOrder;
    }
    else
    {
        // use different components for
each txn
        hr =
CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

```

```

        hr =
CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
if (FAILED(hr))
    throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_StockLevel, NULL,
CLSCXTX_SERVER, IID_ITPCC, (void **)&m_pStockLevel);
if (FAILED(hr))
    throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCXTX_SERVER, IID_ITPCC, (void **)&m_pOrderStatus);
if (FAILED(hr))
    throw new CCOMERR(hr);
}

// call setcomplete to release each
component back into pool
hr = m_pNewOrder->CallSetComplete();
if (FAILED(hr))
    throw new CCOMERR(hr);

if (!m_bSinglePool)
{
    hr = m_pPayment-
>CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    hr = m_pStockLevel-
>CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    hr = m_pOrderStatus-
>CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);
}

CTPCC_COM::~CTPCC_COM()
{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

void CTPCC_COM::NewOrder()
{
    VARIANT             vTxn_out;

```

```

        HRESULT hr = m_pNewOrder->NewOrder(m_vTxn,
&vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::Payment()
{
    VARIANT             vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn,
&vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::StockLevel()
{
    VARIANT             vTxn_out;

    HRESULT hr = m_pStockLevel-
>StockLevel(m_vTxn, &vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-

```

```

        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::OrderStatus()
{
    VARIANT             vTxn_out;

    HRESULT hr = m_pOrderStatus-
>OrderStatus(m_vTxn, &vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}



---



## tpcc_com.h



```

/* FILE: TPCC_COM.H
 * Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Header file for TPC-C COM+ class
implementation.
*
* Change history:
* 4.20.000 - first version
*/
#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec(dllexport)
#endif

class CCOMERR : public CBaseErr
{
 private:
 char m_szErrorText[64];

```


```

```

public:
    // use this interface for genuine
COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to
    // impersonate a non-COM error type
    CCOMERR( int iErrorType, int
iError )
    {
        m_iErrorType =
iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int             m_hr;
    int             m_iErrorType;
    int             m_iError;

    // A CCOMERR class can
    // impersonate another class, which happens if the error
    // was not actually a COM
Services error, but was simply transmitted back via
COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return
ERR_TYPE_COM;
        else
            return
m_iErrorType;
    }

    char *ErrorTypeStr() { return
"COM"; }

    int ErrorNum()
    {
        if (m_iErrorType == 0)
            return m_hr;
        // return COM error
        else
            return
m_iError; // return impersonated error
    }

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf(
m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
        else
            sprintf(
m_szErrorText, "Error: COM HRESULT %x", m_hr );
    }

```

```

    return m_szErrorText;
}

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC* m_pNewOrder;
    ITPCC* m_pPayment;
    ITPCC* m_pStockLevel;
    ITPCC* m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
    };

    NEW_ORDER_DATA           NewOrder;
    PAYMENT_DATA             Payment;
    DELIVERY_DATA            Delivery;

    STOCK_LEVEL_DATA         StockLevel;

    ORDER_STATUS_DATA        OrderStatus;
} u;
} *m_pTxn;
VARIANT m_vTxn;

public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_pTxn->u.NewOrder; }

    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_pTxn->u.Payment; }

    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_pTxn->u.Delivery; }

    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_pTxn->u.StockLevel; }

    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_pTxn->u.OrderStatus; }

    void NewOrder          ();
    void Payment           ();
    void StockLevel        ();
    void OrderStatus       ();

```

```

    void Delivery          ();
    { throw new CCOMERR(E_NOTIMPL); } // not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM*
CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);



---



## tpcc_com_all. cpp



---


/* FILE: TPCC_COM_ALL.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 * PURPOSE: Implementation for TPC-C class.
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - updated rev number to
match kit
 */

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADS

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it
if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>

```

```

//##include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"           //tpckit transaction
header contains definitions of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\common\src\tpcc_com_errorcode.h"
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
    OBJECT_ENTRY(CLSID_TPCC, CTPCC)
    OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
    OBJECT_ENTRY(CLSID_OrderStatus,
COrderStatus)
    OBJECT_ENTRY(CLSID_Payment, CPayment)
    OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

static HINSTANCE hLibInstanceDb = NULL;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

// Critical section to synchronize connection open
and close.
// CRITICAL_SECTION hConnectCriticalSection;

///////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID *lpReserved*)
{
    char szDllName[128];

```

```

        try
        {
            if (dwReason ==
DLL_PROCESS_ATTACH)
            {
                _Module.Init(ObjectMap,
hInstance);

                DisableThreadLibraryCalls(hInstance);

                DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;

                GetComputerName(szMyComputerName, &dwSize);

                szMyComputerName[dwSize] = 0;

                if (
ReadTPCCRegistrySettings( &Reg ) )
                    throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );
                if (Reg.eDB_Protocol ==
ODBC)
                {
                    strcpy(
szDllName, Reg.szPath );
                    strcat(
szDllName, "tpcc_odbc.dll");
                    hLibInstanceDb = LoadLibrary( szDllName );
                    if
(hLibInstanceDb == NULL)
                        throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
                    // get
function pointer to wrapper for class constructor
                    pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
                    if
(pCTPCC_ODBC_new == NULL)
                        throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                    else
                        throw new
CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL );
                    if (Reg.dwConnectDelay
> 0)
                    {
                        InitializeCriticalSection(&hConnectCriticalSection);
                    }
                }
                else if (dwReason ==
DLL_PROCESS_DETACH)

```

```

                _Module.Term();
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _snprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );

    delete e;
    return FALSE;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in object DllMain"));
    return FALSE;
}

return TRUE; // OK
}

///////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE
STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
S_FALSE;
}

///////////////////////////////
// Returns a class factory to create an object of the
requested type
STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}

///////////////////////////////
// DllRegisterServer - Adds entries to the system
registry
STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

```

```

////////// DllUnregisterServer - Removes entries from the
// system registry
STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
    TEXT("tpcc_com_all.dll"));

    _sprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
                    EVENTLOG_ERROR_TYPE, // event type
                    0, // event category
                    0, // event ID
                    NULL, // current user's
SID
                    2, // strings in
lpszStrings
                    0, // no bytes of raw
data
                    (LPCTSTR *)lpszStrings, // array of
error strings
                    NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*/
char* CCOMPONENT_ERR::ErrorText(void)

```

```

{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
        "Required entries missing from registry." },
        { ERR_LOADDLL_FAILED,
        "Load of DLL failed. DLL=" },
        { ERR_GETPROCADDR_FAILED,
        "Could not map proc in DLL. GetProcAddress
error. DLL=" },
        { ERR_UNKNOWN_DB_PROTOCOL,
        "Unknown database protocol specified in
registry." },
        { 0, "" }
    };

    char szTmp[256];
    int i = 0;
    while (TRUE)
    {
        if (errorMsgs[i].szMsg[0] == 0)
        {
            strcpy( szTmp, "Unknown
error number." );
            break;
        }
        if (m_Error ==
errorMsgs[i].iError)
        {
            strcpy( szTmp,
errorMsgs[i].szMsg );
            break;
        }
        i++;
    }

    if (m_szTextDetail)
        strcat( szTmp, m_szTextDetail );
    if (m_SystemErr)
        wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

    m_szErrorText = new char[strlen(szTmp)+1];
    strcpy( m_szErrorText, szTmp );
    return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{

```

```

    // Pace connection close for VIA.
    //
    if (Reg.dwConnectDelay > 0)
    {
        EnterCriticalSection(&hConnectCriticalSection);
        Sleep(Reg.dwConnectDelay);

        LeaveCriticalSection(&hConnectCriticalSection);
    }

    if (m_pTxn)
    {
        delete m_pTxn;
    }

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;
    // get our object context
    HRESULT hr = CoGetObjectContext(
    IID_IObjectContext, (void **)&pObjectContext);
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

//
// called by the ctor activator
//
STDMETHODIMP CTPCC_Common::Construct(IDispatch *
pUnk)
{
    // Code to access construction string, if
needed later...
    // if (!pUnk)
    // return E_UNEXPECTED;
    // IObjectConstructString * pString
    = NULL;
    // HRESULT hr = pUnk-
    >QueryInterface(IID_IObjectContextString, (void
**)&pString);
    // pString->Release();

    try
    {
        // Pace connection creation for
VIA.
        //
        if (Reg.dwConnectDelay > 0)
        {
            EnterCriticalSection(&hConnectCriticalSection);
            Sleep(Reg.dwConnectDelay);
        }
    }
}
```

```

        LeaveCriticalSection(&hConnectCriticalSection);
    }

    if (Reg.eDB_Protocol == ODBC)
        m_pTxn = pCTPCC_ODBC_new(Reg.szDbServer, Reg.szDbUser,
        Reg.szDbPassword, szMyComputerName, Reg.szDbName,
        Reg.szSPPrefix,
        Reg.bCallNoDuplicatesNewOrder );
    }
    catch (CBaseErr *e)
    {
        TCHAR szMsg[256];
        _snprintf(szMsg, sizeof(szMsg),
        "%s error in CTPCC_Common::Construct, code %d: %s",
        e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
        WriteMessageToEventLog( szMsg );
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in object ::Construct"));
        return E_FAIL;
    }
    return S_OK;
}

HRESULT CTPCC_Common::NewOrder(VARIANT txn_in,
VARIANT* txn_out)
{
    PNEW_ORDER_DATA      pNewOrder;
    COM_DATA             *pData;
    COM_DATA             *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
        txn_in.parray->rgsabound-
>cElements,
        txn_in.parray->rgsabound-
>cElements);

```

```

        if (txn_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*)txn_out-
>parray->pvData;
        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pNewOrder = m_pTxn-
>BuffAddr_NewOrder();
        memcpy(pNewOrder, &pData-
>u.NewOrder, sizeof(NEW_ORDER_DATA));
        m_pTxn->NewOrder(); // do the actual txn
        memcpy( &pOutData->u.NewOrder,
pNewOrder, sizeof(NEW_ORDER_DATA));
        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection: if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
m_bCanBePooled = FALSE;
        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::NewOrder."));
        pOutData->retval =
ERR_TYPE_LOGIC;
        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCOM;
    }
}

HRESULT CTPCC_Common::Payment(VARIANT txn_in,
VARIANT* txn_out)
{
    PPAYMENT_DATA      pPayment;
    COM_DATA             *pData;
    COM_DATA             *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
        txn_in.parray->rgsabound-
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*)txn_out-
>parray->pvData;
        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pPayment = m_pTxn-
>BuffAddr_Payment();
        memcpy(pPayment, &pData-
>u.Payment, sizeof(PAYMENT_DATA));
        m_pTxn->Payment(); // do the actual txn
        memcpy( &pOutData->u.Payment,
pPayment, sizeof(PAYMENT_DATA));
        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection: if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
m_bCanBePooled = FALSE;
        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::Payment."));
        pOutData->retval =
ERR_TYPE_LOGIC;
    }
}

```

```

        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in,
VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA pStockLevel;
    COM_DATA          *pData;
    COM_DATA          *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
                     txin.in.parray->rgsabound-
>cElements,
                     txin.in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pStockLevel = m_pTxn-
>BuffAddr_StockLevel();

        memcpy(pStockLevel, &pData-
>u.StockLevel, sizeof(STOCK_LEVEL_DATA));

        m_pTxn->StockLevel();

        memcpy( &pOutData->u.StockLevel,
pStockLevel, sizeof(STOCK_LEVEL_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
    }
}

```

```

>ErrorType();
{
    pOutData->retval = e-
    pOutData->error = e->ErrorNum();
    delete e;
    return E_TPCCCOM;
}

catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::StockLevel."));
    pOutData->retval =
ERR_TYPE_LOGIC;
    pOutData->error = 0;
    m_bCanBePooled = FALSE;
    return E_TPCCCOM;
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txn_in,
VARIANT* txn_out)
{
    PORDER_STATUS_DATA pOrderStatus;
    COM_DATA          *pData;
    COM_DATA          *pOutData;
    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
                     txin.in.parray->rgsabound-
>cElements,
                     txin.in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pOrderStatus = m_pTxn-
>BuffAddr_OrderStatus();

        memcpy(pOrderStatus, &pData-
>u.OrderStatus, sizeof(ORDER_STATUS_DATA));

        m_pTxn->OrderStatus();

        memcpy( &pOutData->u.OrderStatus,
pOrderStatus, sizeof(ORDER_STATUS_DATA));
    }
}

```

```

pOutData->retval = ERR_SUCCESS;
pOutData->error = 0;
return S_OK;
}

catch (CBaseErr *e)
{
    // check for lost database
    connection; if yes, component is toast
    if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
        m_bCanBePooled = FALSE;
}

pOutData->retval = e-
pOutData->error = e->ErrorNum();
delete e;
return E_TPCCCOM;
}

catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::OrderStatus."));
    pOutData->retval =
ERR_TYPE_LOGIC;
    pOutData->error = 0;
    m_bCanBePooled = FALSE;
    return E_TPCCCOM;
}

```

tpcc_com_all.def

```

; tpcc_com_all.def : Declares the module parameters.

LIBRARY      "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow      PRIVATE
    DllGetClassObject     PRIVATE
    DllRegisterServer     PRIVATE
    DllUnregisterServer   PRIVATE

```

tpcc_com_all.h

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oifc, W1, Zp8, env:Win32 (32b run)
protocol : dce , ms_ext, c_ext, robust

```

```

    error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
        __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 475
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__

#ifndef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

```

```

#ifndef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifndef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

#ifndef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifndef __cplusplus
extern "C" {
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#endif /* __TPCCLib_LIBRARY_DEFINED__ */

```

```

#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;
EXTERN_C const CLSID CLSID_TPCC;

#ifndef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-
00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifndef __cplusplus
class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-
00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifndef __cplusplus
class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-
00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifndef __cplusplus
class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-
00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifndef __cplusplus
class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-
00C04FBFE08B")
StockLevel;
#endif

#endif /* __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

#ifndef __cplusplus
}
#endif

#endif

```

tpcc_com_all.i. c

```
/* this ALWAYS GENERATED file contains the IIDs and  
CLSIDs */  
  
/* link this file in with the server and any clients  
*/  
  
/* File created by MIDL compiler version 6.00.0361  
*/  
/* at Thu Mar 16 18:21:15 2006  
*/  
/* Compiler settings for .\src\tpcc_com_all.idl:  
    Oicf, W1, Zp8, env=Win32 (32b run)  
    protocol : dce , ms_ext, c_ext, robust  
    error checks: allocation ref bounds_check enum  
stub_data  
    VC __declspec() decoration level:  
        __declspec(uuid()), __declspec(selectany),  
        __declspec(novtable)  
        DECLSPEC_UUID(), MIDL_INTERFACE()  
*/  
//@@@MIDL_FILE_HEADING( )  
  
#if !defined(_M_IA64) && !defined(_M_AMD64)  
  
#pragma warning( disable: 4049 ) /* more than 64k  
source lines */  
  
#ifdef __cplusplus  
extern "C"  
#endif  
  
#include <rpc.h>  
#include <rpcndr.h>  
  
#ifdef _MIDL_USE_GUIDDEF_  
  
#ifndef INITGUID  
#define INITGUID  
#include <guiddef.h>  
#undef INITGUID  
#else  
#include <guiddef.h>  
#endif  
  
#define  
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,  
b7,b8) \
```

```
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)  
  
#else // !_MIDL_USE_GUIDDEF_  
#ifndef __IID_DEFINED__  
#define __IID_DEFINED__  
  
typedef struct _IID  
{  
    unsigned long x;  
    unsigned short s1;  
    unsigned short s2;  
    unsigned char c[8];  
} IID;  
  
#endif // __IID_DEFINED__  
  
#ifndef CLSID_DEFINED  
#define CLSID_DEFINED  
typedef IID CLSID;  
#endif // CLSID_DEFINED  
  
#define  
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,  
b7,b8) \  
    const type name =  
{l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}  
#endif !_MIDL_USE_GUIDDEF_  
  
MIDL_DEFINE_GUID(IID,  
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00  
,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x  
C0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0  
0,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,  
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x0  
0,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0  
x00,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
#undef MIDL_DEFINE_GUID  
  
#ifdef __cplusplus
```

```

#else // !_MIDL_USE_GUIDDEF_
#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8} }

#endif ! _MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E
,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x0
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
#endif

```

```

#endif /* defined(_M_IA64) || defined(_M_AMD64) */



---



## tpcc_com_errorcode.h



---



```

/* FILE: TPCC_COM_ERRORCODE_H
 * * Microsoft
TPC-C Kit Ver. 4.20.000
 * * Copyright
Microsoft, 1999
 * * All Rights Reserved
 *
 * * not yet
audited
*
* PURPOSE: Header file defining the error
code returned from ITPCC COM interface.
*
* Change history:
* * 4.20.000 - first version
*/
/*
// Error return value for methods in ITPCC interface.
// Define as 0x80042345 (decimal -2147212475).
//
const HRESULT E_TPCCCOM = MAKE_HRESULT
(SEVERITY_ERROR, FACILITY_ITF, 0x2345);

```


```

tpcc_com_ps.def

LIBRARY	"tpcc_com_ps"
EXPORTS	
	DllGetClassObject PRIVATE
	DllCanUnloadNow PRIVATE
	GetProxyDllInfo PRIVATE
	DllRegisterServer PRIVATE
	DllUnregisterServer PRIVATE

tpcc_com_ps.h

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0361
 */
/* at Thu Mar 16 18:21:12 2006

```

```

*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
/*@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );
/* interface __MIDL_itf_tpcc_com_ps_0000 */


```

```

/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object]
*/
EXTERN_C const IID IID_ITPCC;
#endif /* defined(_cplusplus) & !defined(CINTERFACE)

MIDL_INTERFACE("FEEE6AA2-84B1-11d2-BA47-
00C04FBFE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT __stdcall NewOrder(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall Payment(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall Delivery(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall StockLevel(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall OrderStatus(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall CallSetComplete(
void) = 0;
};

#endif /* C style interface */

typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT (STDMETHODCALLTYPE *QueryInterface)(This, riid,ppvObject);

    ITPCC * This,
    /* [in] */ REFIID riid,
    /* [iid_is][out] */ void **ppvObject);
}

```

```

ULONG (STDMETHODCALLTYPE *AddRef)(
    ITPCC * This);

ULONG (STDMETHODCALLTYPE *Release)(
    ITPCC * This);

HRESULT ( STDMETHODCALLTYPE *NewOrder)(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

HRESULT ( STDMETHODCALLTYPE *Payment)(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

HRESULT ( STDMETHODCALLTYPE *Delivery)(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

HRESULT ( STDMETHODCALLTYPE *StockLevel)(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

HRESULT ( STDMETHODCALLTYPE *OrderStatus)(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

HRESULT ( STDMETHODCALLTYPE *CallSetComplete)(
    ITPCC * This);

END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl *lpVtbl;
};

#endif /* COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl->QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lpVtbl->AddRef(This)

#define ITPCC_Release(This) \
    (This)->lpVtbl->Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lpVtbl->NewOrder(This,txn_in,txn_out)

#define ITPCC_Payment(This,txn_in,txn_out) \
    (This)->lpVtbl->Payment(This,txn_in,txn_out)

```

```

(This)->lpVtbl -> Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lpVtbl -> Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lpVtbl -> StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lpVtbl -> OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl -> CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);


```

```

/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long      __RPC_USER
VARIANT_UserSize(   unsigned long *, unsigned long
, VARIANT * );
unsigned char * __RPC_USER VARIANT_UserMarshal(
unsigned long *, unsigned char *, VARIANT * );
unsigned char * __RPC_USER
VARIANT_UserUnmarshal(unsigned long *, unsigned char
*, VARIANT * );
void              __RPC_USER
VARIANT_UserFree(   unsigned long *, VARIANT * );

/* end of Additional Prototypes */

#ifndef __cplusplus
}
#endif
#endif

```

tpcc_com_ps.idl

```

/*      FILE:          ITPCC.IDL
*           Microsoft
TPC-C Kit Ver. 4.20.000
*           Copyright
Microsoft, 1999
*           All Rights Reserved
*
*           not yet
audited
*
*           PURPOSE: Defines the interface used by
TPCC. This interface can be implemented by C++
components.
*
*           Change history:
*           4.20.000 - first version
*/
// Forward declare all types defined
interface ITPCC;
import "oaidl.idl";
import "ocidl.idl";

{
    object,
    oleautomation,
    uuid(FEEE6AA2-84B1-11d2-BA47-
00C04FBF0E08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
}
interface ITPCC : IUnknown
{
    HRESULT __stdcall NewOrder
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
    HRESULT __stdcall Payment
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
    HRESULT __stdcall Delivery
    (

```

```

[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
HRESULT __stdcall StockLevel
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall OrderStatus
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall CallSetComplete
(
);
}; // interface ITPCC

```

tpcc_com_ps_i.c

```

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:

```

```

    __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_
#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif // __IID_DEFINED__
#endif // !_MIDL_USE_GUIDDEF_
#endif // __cplusplus
#endif

```

```

#endif !__MIDL_USE_GUIDDEF__

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);

#ifndef MIDL_DEFINE_GUID
#ifdef __cplusplus
}
#endif
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64) */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win64 (32b run, appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#endif

```

```

#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}};

#ifndef _MIDL_USE_GUIDDEF_
MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);

#endif // __IID_DEFINED__
#ifndef MIDL_DEFINE_GUID
#ifdef __cplusplus
}
#endif
#endif

```

tpcc_com_ps ***p.c***

/* this ALWAYS GENERATED file contains the proxy stub
code */

```

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf, W1, Zp8, env=Win32 (32b run)
   protocol : dce , ms_ext, c_ext
   error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()

*/
//@@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif
#pragma warning( disable: 4100 ) /* unreferenced
arguments in x86 call */
#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity*/
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REQD_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1023
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{

```

```

short Pad;
unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04, 0x1CEB, 0x11C9, {0x9F, 0xE8, 0x08, 0x00, 0x2B,
0x10, 0x48, 0x60}}, {2, 0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this
stub because it uses these features:
#error -Oif or -Oicf, [wire_marshall] or
[user_marshall] attribute.
#error However, your C/C++ compilation flags indicate
you intend to run this app on earlier systems.
#error This app will die there with the
RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
        /* 8 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
        /* 10 */ NdrFcShort( 0x0 ), /* 0 */
        /* 12 */ NdrFcShort( 0x8 ), /* 8 */
        /* 14 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */

```

```

0x3, /* Parameter txn_in */

/* 16 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 18 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 20 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 24 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 26 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 30 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 32 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Payment */

/* 34 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 36 */ NdrFcLong( 0x0 ), /* 0 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* 3 */

/* Parameter txn_in */

/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 54 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 56 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */

```

```

/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 60 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 66 */ 0x8, /* FC_LONG */
0x0, /* */
0 */

/* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */
Old Flags: object, Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */
3 */

/* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 88 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 94 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 100 */ 0x8, /* FC_LONG */
0x0, /* */
0 */

/* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */

```

```

0x6c, /* */
Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */
3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 122 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 128 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 134 */ 0x8, /* FC_LONG */
0x0, /* */
0 */

/* Procedure OrderStatus */

/* 136 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */
Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
/* 144 */ N/rfcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 146 */ N/rfcShort( 0x0 ), /* 0 */
/* 148 */ N/rfcShort( 0x8 ), /* 8 */
/* 150 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */
3 */

/* Parameter txn_in */

/* 152 */ N/rfcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 154 */ N/rfcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 156 */ N/rfcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 158 */ N/rfcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 160 */ N/rfcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 162 */ N/rfcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 164 */ N/rfcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 166 */ N/rfcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 168 */ 0x8, /* FC_LONG */
0x0, /* */
0 */

/* Procedure CallSetComplete */

/* 170 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */
Old Flags: object, Oi2 */
/* 172 */ N/rfcLong( 0x0 ), /* 0 */
/* 176 */ N/rfcShort( 0x8 ), /* 8 */
/* 178 */ N/rfcShort( 0x8 ), /* x86 Stack
size/offset = 8 */
/* 180 */ N/rfcShort( 0x0 ), /* 0 */
/* 182 */ N/rfcShort( 0x8 ), /* 8 */
/* 184 */ 0x4, /* Oi2 Flags: has
return, */
0x1, /* */
1 */

/* Return value */

/* 186 */ N/rfcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 188 */ N/rfcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 190 */ 0x8, /* FC_LONG */
0x0, /* */
0 */

0x0
};

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        N/rfcShort( 0x0 ), /* */
        0 */
    }
    /* 2 */
};

```

```

0x12, 0x0,          /* FC_UP */
/* 4 */ NdrFcShort( 0x3ca ),      /* Offset= 970 (974) */
/* 6 */
0x2b,              /* FC_NON_ENCAPSULATED_UNION */
0x9,               /* FC ULONG */
/* 8 */ 0x7,           /* Corr desc: FC USHORT */
/* */
0x0,               /* FC */
/* 10 */ NdrFcShort( 0xffff8 ),    /* -8 */
/* 12 */ NdrFcShort( 0x2 ),       /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ),      /* 16 */
/* 16 */ NdrFcShort( 0x2f ),      /* 47 */
/* 18 */ NdrFcLong( 0x14 ),       /* 20 */
/* 22 */ NdrFcShort( 0x800b ),    /* Simple arm
type: FC_HYPER */
/* 24 */ NdrFcLong( 0x3 ),        /* 3 */
/* 28 */ NdrFcShort( 0x8008 ),    /* Simple arm
type: FC_LONG */
/* 30 */ NdrFcLong( 0x11 ),       /* 17 */
/* 34 */ NdrFcShort( 0x8001 ),    /* Simple arm
type: FC_BYTE */
/* 36 */ NdrFcLong( 0x2 ),        /* 2 */
/* 40 */ NdrFcShort( 0x8006 ),    /* Simple arm
type: FC_SHORT */
/* 42 */ NdrFcLong( 0x4 ),        /* 4 */
/* 46 */ NdrFcShort( 0x800a ),    /* Simple arm
type: FC_FLOAT */
/* 48 */ NdrFcLong( 0x5 ),        /* 5 */
/* 52 */ NdrFcShort( 0x800c ),    /* Simple arm
type: FC_DOUBLE */
/* 54 */ NdrFcLong( 0xb ),        /* 11 */
/* 58 */ NdrFcShort( 0x8006 ),    /* Simple arm
type: FC_SHORT */
/* 60 */ NdrFcLong( 0xa ),        /* 10 */
/* 64 */ NdrFcShort( 0x8008 ),    /* Simple arm
type: FC_LONG */
/* 66 */ NdrFcLong( 0x6 ),        /* 6 */
/* 70 */ NdrFcShort( 0xe8 ),      /* Offset= 232 (302) */
/* 72 */ NdrFcLong( 0x7 ),        /* 7 */
/* 76 */ NdrFcShort( 0x800c ),    /* Simple arm
type: FC_DOUBLE */
/* 78 */ NdrFcLong( 0x8 ),        /* 8 */
/* 82 */ NdrFcShort( 0xe2 ),      /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0xd ),        /* 13 */
/* 88 */ NdrFcShort( 0xf4 ),      /* Offset= 244 (332) */
/* 90 */ NdrFcLong( 0x9 ),        /* 9 */
/* 94 */ NdrFcShort( 0x100 ),     /* Offset= 256 (350) */
/* 96 */ NdrFcLong( 0x2000 ),     /* 8192 */
/* 100 */ NdrFcShort( 0x10c ),    /* Offset= 268 (368) */
/* 102 */ NdrFcLong( 0x24 ),      /* 36 */
/* 106 */ NdrFcShort( 0x31a ),    /* Offset= 794 (900) */
/* 108 */ NdrFcLong( 0x4024 ),    /* 16420 */
/* 112 */ NdrFcShort( 0x314 ),    /* Offset= 788 (900) */
/* 114 */ NdrFcLong( 0x4011 ),    /* 16401 */
/* 118 */ NdrFcShort( 0x312 ),    /* Offset= 786 (904) */
/* 120 */ NdrFcLong( 0x4002 ),    /* 16386 */
/* 124 */ NdrFcShort( 0x310 ),    /* Offset= 784 (908) */
/* 126 */ NdrFcLong( 0x4003 ),    /* 16387 */
/* 130 */ NdrFcShort( 0x30e ),    /* Offset= 782 (912) */
/* 132 */ NdrFcLong( 0x4014 ),    /* 16404 */
/* 136 */ NdrFcShort( 0x30c ),    /* Offset= 780 (916) */
/* 138 */ NdrFcLong( 0x4004 ),    /* 16388 */
/* 142 */ NdrFcShort( 0x30a ),    /* Offset= 778 (920) */
/* 144 */ NdrFcLong( 0x4005 ),    /* 16389 */
/* 148 */ NdrFcShort( 0x308 ),    /* Offset= 776 (924) */
/* 150 */ NdrFcLong( 0x400b ),    /* 16395 */
/* 154 */ NdrFcShort( 0x2f2 ),    /* Offset= 754 (908) */
/* 156 */ NdrFcLong( 0x400a ),    /* 16394 */
/* 160 */ NdrFcShort( 0x2f0 ),    /* Offset= 752 (912) */
/* 162 */ NdrFcLong( 0x4006 ),    /* 16390 */
/* 166 */ NdrFcShort( 0x2fa ),    /* Offset= 762 (928) */
/* 168 */ NdrFcLong( 0x4007 ),    /* 16391 */
/* 172 */ NdrFcShort( 0x2f0 ),    /* Offset= 752 (924) */
/* 174 */ NdrFcLong( 0x4008 ),    /* 16392 */
/* 178 */ NdrFcShort( 0x2f2 ),    /* Offset= 754 (932) */
/* 180 */ NdrFcLong( 0x400d ),    /* 16397 */
/* 184 */ NdrFcShort( 0x2f0 ),    /* Offset= 752 (936) */
/* 186 */ NdrFcLong( 0x4009 ),    /* 16393 */
/* 190 */ NdrFcShort( 0x2ee ),    /* Offset= 750 (940) */
/* 192 */ NdrFcLong( 0x6000 ),    /* 24576 */
/* 196 */ NdrFcShort( 0x2ec ),    /* Offset= 748 (944) */
/* 198 */ NdrFcLong( 0x400c ),    /* 16396 */
/* 202 */ NdrFcShort( 0x2ea ),    /* Offset= 746 (948) */
/* 204 */ NdrFcLong( 0x10 ),      /* 16 */
/* 208 */ NdrFcShort( 0x8002 ),    /* Simple arm
type: FC_CHAR */
/* 210 */ NdrFcLong( 0x12 ),      /* 18 */
/* 214 */ NdrFcShort( 0x8006 ),    /* Simple arm
type: FC_SHORT */
/* 216 */ NdrFcLong( 0x13 ),      /* 19 */
/* 220 */ NdrFcShort( 0x8008 ),    /* Simple arm
type: FC_LONG */
/* 222 */ NdrFcLong( 0x15 ),      /* 21 */
/* 226 */ NdrFcShort( 0x800b ),    /* Simple arm
type: FC_HYPER */
/* 228 */ NdrFcLong( 0x16 ),      /* 22 */
/* 232 */ NdrFcShort( 0x8008 ),    /* Simple arm
type: FC_LONG */
/* 234 */ NdrFcLong( 0x17 ),      /* 23 */
/* 238 */ NdrFcShort( 0x8008 ),    /* Simple arm
type: FC_LONG */
/* 240 */ NdrFcLong( 0xe ),       /* 14 */
/* 244 */ NdrFcShort( 0x2c8 ),    /* Offset= 712 (956) */
/* 246 */ NdrFcLong( 0x400e ),    /* 16398 */
/* 250 */ NdrFcShort( 0x2cc ),    /* Offset= 716 (966) */
/* 252 */ NdrFcLong( 0x4010 ),    /* 16400 */
/* 256 */ NdrFcShort( 0x2ca ),    /* Offset= 714 (970) */
/* 258 */ NdrFcLong( 0x4012 ),    /* 16402 */
/* 262 */ NdrFcShort( 0x286 ),    /* Offset= 646 (908) */
/* 264 */ NdrFcLong( 0x4013 ),    /* 16403 */
/* 268 */ NdrFcShort( 0x284 ),    /* Offset= 644 (912) */
/* 270 */ NdrFcLong( 0x4015 ),    /* 16405 */
/* 274 */ NdrFcShort( 0x282 ),    /* Offset= 642 (916) */
/* 276 */ NdrFcLong( 0x4016 ),    /* 16406 */
/* 280 */ NdrFcShort( 0x278 ),    /* Offset= 626 (912) */
/* 282 */ NdrFcLong( 0x4017 ),    /* 16407 */
/* 286 */ NdrFcShort( 0x272 ),    /* Offset= 628 (914) */
/* 288 */ NdrFcLong( 0x0 ),       /* 0 */
/* 292 */ NdrFcShort( 0x0 ),       /* Offset= 0 (292) */
/* 294 */ NdrFcLong( 0x1 ),       /* 1 */
/* 298 */ NdrFcShort( 0x0 ),       /* Offset= 0 (298) */
/* 300 */ NdrFcShort( 0xffff ),    /* Offset= -1 (299) */
/* 302 */ NdrFcShort( 0x0 ),       /* Offset= 0x15, */
/* FC_STRUCT */
/* 308 */ NdrFcShort( 0x0 ),       /* 0x7, */
/* 310 */ NdrFcShort( 0xc ),       /* 8 */
/* 306 */ NdrFcShort( 0xb ),       /* FC_HYPER */
/* 312 */ NdrFcShort( 0x5b ),     /* 0x5b, */
/* FC_END */
/* 308 */ NdrFcShort( 0x0 ),       /* 0x12, 0x0, */
/* FC_UP */
/* 310 */ NdrFcShort( 0xc ),       /* Offset= 12 (322) */
/* 312 */ NdrFcShort( 0x1b ),     /* 0x1b, */
/* FC_CARRAY */
/* 301 */ NdrFcShort( 0x0 ),       /* 0x1, */
/* 314 */ NdrFcShort( 0x2 ),       /* 2 */
/* 316 */ NdrFcShort( 0x9 ),       /* Corr desc: FC ULONG */
/* 318 */ NdrFcShort( 0x0 ),       /* 0x0, */
/* 320 */ NdrFcShort( 0x6 ),       /* FC_SHORT */
/* 322 */ NdrFcShort( 0x5b ),     /* 0x5b, */
/* FC_END */
/* 322 */ NdrFcShort( 0x0 ),       /* 0x17, */
/* FC_CSTRUCT */
/* 303 */ NdrFcShort( 0x3 ),       /* 0x3, */
/* 324 */ NdrFcShort( 0x8 ),       /* 8 */

```

```

/* 326 */ NdrFcShort( 0xffff2 ), /* Offset= -14 (312) */
/* 328 */ 0x8, /* FC_LONG */
0x8, /* FC_END */
/* 330 */ 0x5c, /* FC_PAD */
0x5b, /* FC_IP */
0x2f, /* FC_CONSTANT_IID */
/* 334 */ NdrFcLong( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ NdrFcShort( 0x0 ), /* 0 */
/* 342 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 344 */ 0x0, /* 0 */
0x0, /* 0 */
/* 346 */ 0x0, /* 0 */
0x0, /* 0 */
/* 348 */ 0x0, /* 0 */
0x46, /* 70 */
/* 350 */ 0x2f, /* FC_IP */
0x5a, /* FC_CONSTANT_IID */
/* 352 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 356 */ NdrFcShort( 0x0 ), /* 0 */
/* 358 */ NdrFcShort( 0x0 ), /* 0 */
/* 360 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 362 */ 0x0, /* 0 */
0x0, /* 0 */
/* 364 */ 0x0, /* 0 */
0x0, /* 0 */
/* 366 */ 0x0, /* 0 */
0x46, /* 70 */
/* 368 */ 0x12, 0x10, /* FC_UP [pointer_deref] */
/* 370 */ NdrFcShort( 0x2 ), /* Offset= 2 (372) */
/* 372 */ 0x12, 0x0, /* FC_UP */
/* 374 */ NdrFcShort( 0x1fc ), /* Offset= 508 (882) */
/* 376 */ 0x2a, /* FC_ENCAPSULATED_UNION */
0x49, /* 73 */
/* 378 */ NdrFcShort( 0x18 ), /* 24 */

/* 380 */ NdrFcShort( 0xa ), /* 10 */
/* 382 */ NdrFcLong( 0x8 ), /* 8 */
/* 386 */ NdrFcShort( 0x58 ), /* Offset= 88 (474) */
/* 388 */ NdrFcLong( 0xd ), /* 13 */
/* 392 */ NdrFcShort( 0x78 ), /* Offset= 120 (512) */
/* 394 */ NdrFcLong( 0x9 ), /* 9 */
/* 398 */ NdrFcShort( 0x94 ), /* Offset= 148 (546) */
/* 400 */ NdrFcLong( 0xc ), /* 12 */
/* 404 */ NdrFcShort( 0xbc ), /* Offset= 188 (592) */
/* 406 */ NdrFcLong( 0x24 ), /* 36 */
/* 410 */ NdrFcShort( 0x114 ), /* Offset= 276 (686) */
/* 412 */ NdrFcLong( 0x800d ), /* 32781 */
/* 416 */ NdrFcShort( 0x130 ), /* Offset= 304 (720) */
/* 418 */ NdrFcLong( 0x10 ), /* 16 */
/* 422 */ NdrFcShort( 0x148 ), /* Offset= 328 (750) */
/* 424 */ NdrFcLong( 0x2 ), /* 2 */
/* 428 */ NdrFcShort( 0x160 ), /* Offset= 352 (780) */
/* 430 */ NdrFcLong( 0x3 ), /* 3 */
/* 434 */ NdrFcShort( 0x178 ), /* Offset= 376 (810) */
/* 436 */ NdrFcLong( 0x14 ), /* 20 */
/* 440 */ NdrFcShort( 0x190 ), /* Offset= 400 (840) */
/* 442 */ NdrFcShort( 0xffff ), /* Offset= -1 (441) */
/* 444 */ 0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 446 */ NdrFcShort( 0x4 ), /* 4 */
/* 448 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ 0x4b, /* FC_PP */
0x5c, /* FC_PAD */
/* 454 */ 0x48, /* FC_VARIABLE_REPEAT */
0x49, /* FC_FIXED_OFFSET */
/* 456 */ NdrFcShort( 0x4 ), /* 4 */
/* 458 */ NdrFcShort( 0x0 ), /* 0 */
/* 460 */ NdrFcShort( 0x1 ), /* 1 */
/* 462 */ NdrFcShort( 0x0 ), /* 0 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x12, 0x0, /* FC_UP */
/* 468 */ NdrFcShort( 0xffe6 ), /* Offset= -146 (322) */
/* 470 */ 0x5b, /* FC_END */
0x8, /* FC_LONG */
/* 472 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 474 */ 0x16, /* FC_PSTRUCT */
0x3, /* 3 */
/* 476 */ NdrFcShort( 0x8 ), /* 8 */
/* 478 */ 0x4b, /* FC_PP */
0x5c, /* FC_PAD */
/* 480 */ 0x46, /* FC_NO_REPEAT */
0x5c, /* FC_PAD */
/* 482 */ NdrFcShort( 0x4 ), /* 4 */
/* 484 */ NdrFcShort( 0x4 ), /* 4 */
/* 486 */ 0x11, 0x0, /* FC_RP */
/* 488 */ NdrFcShort( 0xffd4 ), /* Offset= -44 (444) */
/* 490 */ 0x5b, /* FC_END */
0x8, /* FC_LONG */
/* 492 */ 0x8, /* FC_LONG */
0x5b, /* FC_END */
/* 494 */ 0x21, /* FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 496 */ NdrFcShort( 0x0 ), /* 0 */
/* 498 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* 500 */ NdrFcShort( 0x0 ), /* 0 */
/* 502 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 506 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 508 */ NdrFcShort( 0xff50 ), /* Offset= -176 (332) */
/* 510 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 512 */ 0x1a, /* FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 514 */ NdrFcShort( 0x8 ), /* 8 */
/* 516 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 518 */ NdrFcShort( 0x6 ), /* Offset= 6 (524) */
/* 520 */ 0x8,
          /* FC_LONG */
          0x36,
          /* */
FC_POINTER */
/* 522 */ 0x5c,
          /* FC_PAD */
          0x5b,
          /* */
FC_END */
/* 524 */
          0x11, 0x0,
          /* */
FC_RP */
/* 526 */ NdrFcShort( 0xffe0 ), /* Offset= -32 (494) */
/* 528 */
          0x21,
          /* */
FC_BOGUS_ARRAY */
          0x3,
          /* */
3 */
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ 0x19,
          /* Corr desc: field
pointer, FC ULONG */
          0x0,
          /* */
/* 534 */ NdrFcShort( 0x0 ), /* 0 */
/* 536 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 540 */ 0x4c,
          /* FC_EMBEDDED_COMPLEX */
*/
          0x0,
          /* */
0 */
/* 542 */ NdrFcShort( 0xff40 ), /* Offset= -192 (350) */
/* 544 */ 0x5c,
          /* FC_PAD */
          0x5b,
          /* */
FC_END */
/* 546 */
          0x1a,
          /* */
FC_BOGUS_STRUCT */
          0x3,
          /* */
3 */
/* 548 */ NdrFcShort( 0x8 ), /* 8 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8,
          /* FC_LONG */
          0x36,
          /* */
FC_POINTER */
/* 556 */ 0x5c,
          /* FC_PAD */
          0x5b,
          /* */
FC_END */
/* 558 */
          0x11, 0x0,
          /* */
FC_RP */
/* 560 */ NdrFcShort( 0xffe0 ), /* Offset= -32 (528) */
/* 562 */
          0x1b,
          /* */
FC_CARRAY */
          0x3,
          /* */
3 */
/* 564 */ NdrFcShort( 0x4 ), /* 4 */
/* 566 */ 0x19,
          /* Corr desc: field
pointer, FC ULONG */
          0x0,
          /* */
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
          /*
/* 570 */ NdrFcShort( 0x6 ), /* Offset= 6 (524) */
/* 572 */ 0x5c,
          /* FC_PAD */
          0x48,
          /* */
FC_VARIABLE_REPEAT */
          0x49,
          /* */
FC_FIXED_OFFSET */
/* 574 */ NdrFcShort( 0x4 ), /* 4 */
/* 576 */ NdrFcShort( 0x0 ), /* 0 */
/* 578 */ NdrFcShort( 0x1 ), /* 1 */
/* 580 */ NdrFcShort( 0x0 ), /* 0 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ 0x12, 0x0,
          /* FC_UP */
/* 586 */ NdrFcShort( 0x184 ), /* Offset= 388 (974) */
/* 588 */
          0x5b,
          /* */
FC_END */
          0x8,
          /* */
FC_LONG */
/* 590 */ 0x5c,
          /* FC_PAD */
          0x5b,
          /* */
FC_END */
/* 592 */
          0x1a,
          /* */
FC_BOGUS_STRUCT */
          0x3,
          /* */
3 */
/* 594 */ NdrFcShort( 0x8 ), /* 8 */
/* 596 */ NdrFcShort( 0x0 ), /* 0 */
/* 598 */ NdrFcShort( 0x6 ), /* Offset= 6 (604) */
/* 600 */ 0x8,
          /* FC_LONG */
          0x36,
          /* */
FC_POINTER */
/* 602 */ 0x5c,
          /* FC_PAD */
          0x5b,
          /* */
FC_END */
/* 604 */
          0x11, 0x0,
          /* */
FC_RP */
/* 606 */ NdrFcShort( 0xffd4 ), /* Offset= -44 (562) */
/* 608 */
          0x2f,
          /* */
FC_IP */
          0x5a,
          /* */
FC_CONSTANT_IID */
/* 610 */ NdrFcLong( 0x2f ), /* 47 */
/* 614 */ NdrFcShort( 0x0 ), /* 0 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ 0xc0,
          /* 192 */
          0x0,
          /* */
0 */
/* 620 */ 0x0,
          /* 0 */
          0x0,
          /* */
0 */
/* 622 */ 0x0,
          /* 0 */
          0x0,
          /* */
0 */
/* 624 */ 0x0,
          /* 0 */
          0x46,
          /* */
70 */
/* 626 */
          0x1b,
          /* */
FC_CARRAY */
          0x0,
          /* */
0 */
/* 628 */ NdrFcShort( 0x1 ), /* 1 */
/* 630 */ 0x19,
          /* Corr desc: field
pointer, FC ULONG */
          0x0,
          /* */
/* 632 */ NdrFcShort( 0x4 ), /* 4 */
/* 634 */ 0x1,
          /* FC_BYT */
          0x5b,
          /* */
FC_END */
/* 636 */
          0x1a,
          /* */
FC_BOGUS_STRUCT */
          0x3,
          /* */
3 */
/* 638 */ NdrFcShort( 0x10 ), /* 16 */
/* 640 */ NdrFcShort( 0x0 ), /* 0 */
/* 642 */ NdrFcShort( 0xa ), /* Offset= 10 (652) */
/* 644 */ 0x8,
          /* FC_LONG */
          0x8,
          /* */
FC_LONG */
/* 646 */ 0x4c,
          /* FC_EMBEDDED_COMPLEX */
*/
          0x0,
          /* */
0 */
/* 648 */ NdrFcShort( 0xffd8 ), /* Offset= -40 (608) */
/* 650 */ 0x36,
          /* FC_POINTER */
          0x5b,
          /* */
FC_END */
/* 652 */
          0x12, 0x0,
          /* */
FC_UP */
/* 654 */ NdrFcShort( 0xffe4 ), /* Offset= -28 (626) */
/* 656 */
          0x1b,
          /* */
FC_CARRAY */
          0x3,
          /* */
3 */
/* 658 */ NdrFcShort( 0x4 ), /* 4 */
/* 660 */ 0x19,
          /* Corr desc: field
pointer, FC ULONG */
          0x0,
          /* */
/* 662 */ NdrFcShort( 0x0 ), /* 0 */
/* 664 */
          0x4b,
          /* */
FC_PP */
          0x5c,
          /* */
FC_PAD */
/* 666 */
          0x48,
          /* */
FC_VARIABLE_REPEAT */
          0x49,
          /* */
FC_FIXED_OFFSET */
          /*

```

```

/* 668 */ NdrFcShort( 0x4 ), /* 4 */
/* 670 */ NdrFcShort( 0x0 ), /* 0 */
/* 672 */ NdrFcShort( 0x1 ), /* 1 */
/* 674 */ NdrFcShort( 0x0 ), /* 0 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ 0x12, 0x0, /* FC_UP */
/* 680 */ NdrFcShort( 0xffffd4 ), /* Offset= -44 (636) */
/* 682 */ 0x5b, /* */
FC_END /* */

0x8, /* */
FC_LONG /* */
/* 684 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END /* */
/* 686 */ 0x1a, /* */
FC_BOGUS_STRUCT /* */
0x3, /* */
3 /*
/* 722 */ NdrFcShort( 0x18 ), /* 24 */
/* 724 */ NdrFcShort( 0x0 ), /* 0 */
/* 726 */ NdrFcShort( 0xa ), /* Offset= 10 (736) */
/* 728 */ 0x8, /* FC_LONG */
0x36, /* */
FC_POINTER /* */
/* 730 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
/*
0 /*
/* 732 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (708) */
/* 734 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END /* */
/* 736 */ /*
0x11, 0x0, /* */
FC_RP /* */
/* 738 */ NdrFcShort( 0xff0c ), /* Offset= -244 (494) */
/* 740 */ /*
0x1b, /* */
FC_CARRAY /* */
0x0, /* */
0 /*
/* 742 */ NdrFcShort( 0x1 ), /* 1 */
/* 744 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* */
/*
/* 746 */ NdrFcShort( 0x0 ), /* 0 */
/* 748 */ 0x1, /* FC_BYTE */
0x5b, /* */
FC_END /* */
/* 750 */ /*
0x16, /* */
FC_PSTRUCT /* */
0x3, /* */
3 /*
/* 752 */ NdrFcShort( 0x8 ), /* 8 */
/* 754 */ /*
0x4b, /* */
FC_PP /* */
0x5c, /* */
FC_PAD /* */
/* 756 */ /*
0x46, /* */
FC_NO_REPEAT /* */
0x5c, /* */
FC_PAD /* */
/* 758 */ NdrFcShort( 0x4 ), /* 4 */
/* 760 */ NdrFcShort( 0x4 ), /* 4 */
/* 762 */ 0x12, 0x0, /* FC_UP */
/* 764 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (740) */
/* 766 */ /*
0x5b, /* */
FC_END /* */

0x8, /* */
FC_LONG /* */
/* 768 */ 0x8, /* FC_LONG */
0x5b, /* */
FC_END /* */
/* 770 */ /*
0x1b, /* */
FC_CARRAY /* */
0x1, /* */
1 /*
/* 772 */ NdrFcShort( 0x2 ), /* 2 */
/* 774 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* */
/*
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ 0x6, /* FC_SHORT */
0x5b, /* */
FC_END /* */
/* 780 */ /*
0x16, /* */
FC_PSTRUCT /* */
0x3, /* */
3 /*
/* 782 */ NdrFcShort( 0x8 ), /* 8 */
/* 784 */ /*
0x4b, /* */
FC_PP /* */
0x5c, /* */
FC_PAD /* */
/* 786 */ /*
0x46, /* */
FC_NO_REPEAT /* */
0x5c, /* */
FC_PAD /* */
/* 788 */ NdrFcShort( 0x4 ), /* 4 */
/* 790 */ NdrFcShort( 0x4 ), /* 4 */
/* 792 */ 0x12, 0x0, /* FC_UP */
/* 794 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (770) */
/* 796 */ /*
0x5b, /* */
FC_END /* */

0x8, /* */
FC_LONG /* */
/* 798 */ 0x8, /* FC_LONG */
0x5b, /* */
FC_END /* */
/* 800 */ /*
0x1b, /* */
FC_CARRAY /* */
0x3, /* */
3 /*
/* 802 */ NdrFcShort( 0x4 ), /* 4 */
/* 804 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* */
/*
/* 806 */ NdrFcShort( 0x0 ), /* 0 */
/* 808 */ 0x8, /* FC_LONG */
0x5b, /* */
FC_END /* */

```

```

/* 810 */           0x16,          /*      */
FC_PSTRUCT */       0x3,           /*      */
3 */               /*      */
/* 812 */ NdrFcShort( 0x8 ), /* 8 */ 
/* 814 */           0x4b,          /*      */
FC_PP */           0x5c,          /*      */
FC_PAD */          /*      */
/* 816 */           0x46,          /*      */
FC_NO_REPEAT */    0x5c,          /*      */
FC_PAD */          /*      */
/* 818 */ NdrFcShort( 0x4 ), /* 4 */ 
/* 820 */ NdrFcShort( 0x4 ), /* 4 */ 
/* 822 */ 0x12, 0x0,        /* FC_UP */ 
/* 824 */ NdrFcShort( 0xffe8 ), /* Offset= - 
24 (800) */ 
/* 826 */           0x5b,          /*      */
FC_END */          /*      */
FC_LONG */         0x8,           /*      */
/* 828 */ 0x8,           /* FC_LONG */ 
FC_END */          0x5b,          /*      */
/* 830 */           0x1b,          /*      */
FC_CARRAY */       0x7,           /*      */
7 */               /*      */
/* 832 */ NdrFcShort( 0x8 ), /* 8 */ 
/* 834 */ 0x19,          /* Corr desc: field 
pointer, FC ULONG */ 
0x0,               /*      */
/* 836 */ NdrFcShort( 0x0 ), /* 0 */ 
/* 838 */ 0xb,           /* FC_HYPER */ 
FC_END */          0x5b,          /*      */
/* 840 */           0x16,          /*      */
FC_PSTRUCT */     0x3,           /*      */
3 */               /*      */
/* 842 */ NdrFcShort( 0x8 ), /* 8 */ 
/* 844 */           0x4b,          /*      */
FC_PP */           0x5c,          /*      */
FC_PAD */          /*      */
/* 846 */           0x46,          /*      */
FC_NO_REPEAT */    0x5c,          /*      */
FC_PAD */          /*      */
/* 848 */ NdrFcShort( 0x4 ), /* 4 */ 
/* 850 */ NdrFcShort( 0x4 ), /* 4 */ 
/* 852 */ 0x12, 0x0,        /* FC_UP */ 
/* 854 */ NdrFcShort( 0xffe8 ), /*      */
24 (830) */ 
/* 856 */           0x5b,          /*      */
FC_END */          /*      */
FC_LONG */         0x8,           /*      */
/* 858 */ 0x8,           /* FC_LONG */ 
FC_END */          0x5b,          /*      */
/* 860 */           0x15,          /*      */
FC_STRUCT */       0x3,           /*      */
3 */               /*      */
/* 862 */ NdrFcShort( 0x8 ), /* 8 */ 
/* 864 */ 0x8,           /* FC_LONG */ 
FC_LONG */         0x8,           /*      */
/* 866 */ 0x5c,          /* FC_PAD */ 
FC_END */          0x5b,          /*      */
/* 868 */           0x1b,          /*      */
FC_CARRAY */       0x3,           /*      */
3 */               /*      */
/* 870 */ NdrFcShort( 0x8 ), /* 8 */ 
/* 872 */ 0x7,           /* Corr desc: FC USHORT 
*/ 
0x0,               /*      */
/* 874 */ NdrFcShort( 0ffd8 ), /* -40 */ 
/* 876 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */ 
0x0,               /*      */
0 */               /*      */
/* 878 */ NdrFcShort( 0ffee ), /* Offset= - 
18 (860) */ 
/* 880 */ 0x5c,          /* FC_PAD */ 
FC_END */          0x5b,          /*      */
/* 882 */           0x1a,          /*      */
FC_BOGUS_STRUCT */ 0x3,           /*      */
3 */               /*      */
/* 884 */ NdrFcShort( 0x28 ), /* 40 */ 
/* 886 */ NdrFcShort( 0ffee ), /*      */
18 (868) */ 
/* 888 */ NdrFcShort( 0x0 ), /* Offset= 0 (888) */ 
/* 890 */ 0x6,           /* FC_SHORT */ 
FC_SHORT */        0x6,           /*      */
/* 892 */ 0x8,           /* FC_LONG */ 
FC_LONG */         0x8,           /*      */
/* 894 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */ 
0 */               /*      */
0 */               /*      */
/* 896 */ NdrFcShort( 0fdf8 ), /*      */
520 (376) */ 
/* 898 */ 0x5c,          /* FC_PAD */ 
0x5b,               /*      */
FC_END */          /*      */
/* 900 */           0x12, 0x0,        /*      */
FC_UP */           /* simple_pointer */ 
/* 902 */ NdrFcShort( 0fef6 ), /*      */
266 (636) */ 
/* 904 */           0x12, 0x8,        /*      */
FC_UP */           /* simple_pointer */ 
/* 906 */ 0x1,           /* FC_BYTE */ 
FC_PAD */          /*      */
/* 908 */           0x12, 0x8,        /*      */
FC_UP */           /* simple_pointer */ 
/* 910 */ 0x6,           /* FC_SHORT */ 
0x5c,               /*      */
FC_PAD */          /*      */
/* 912 */           0x12, 0x8,        /*      */
FC_UP */           /* simple_pointer */ 
/* 914 */ 0x8,           /* FC_LONG */ 
0x5c,               /*      */
FC_PAD */          /*      */
/* 916 */           0x12, 0x8,        /*      */
FC_UP */           /* simple_pointer */ 
/* 918 */ 0xb,           /* FC_HYPER */ 
0x5c,               /*      */
FC_PAD */          /*      */
/* 920 */           0x12, 0x8,        /*      */
FC_UP */           /* simple_pointer */ 
/* 922 */ 0xa,           /* FC_FLOAT */ 
0x5c,               /*      */
FC_PAD */          /*      */
/* 924 */           0x12, 0x8,        /*      */
FC_UP */           /* simple_pointer */ 
/* 926 */ 0xc,           /* FC_DOUBLE */ 
0x5c,               /*      */
FC_PAD */          /*      */
/* 928 */           0x12, 0x0,        /*      */
FC_UP */           /* pointer_deref */ 
/* 930 */ NdrFcShort( 0fd8c ), /*      */
628 (302) */ 
/* 932 */           0x12, 0x10,        /*      */
FC_UP */           /* pointer_deref */ 
/* 934 */ NdrFcShort( 0fd8e ), /*      */
626 (308) */ 
/* 936 */           0x12, 0x10,        /*      */
FC_UP */           /* pointer_deref */ 
/* 938 */ NdrFcShort( 0fda2 ), /*      */
606 (332) */ 
/* 940 */           0x12, 0x10,        /*      */

```

```

0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 942 */ NdrFcShort( 0xfdbo ),           /* Offset= - 592 (350) */
/* 944 */
0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 946 */ NdrFcShort( 0xfdbe ),           /* Offset= - 578 (368) */
/* 948 */
0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 950 */ NdrFcShort( 0x2 ),   /* Offset= 2 (952) */
/* 952 */
0x12, 0x0,       /*
FC_UP */
/* 954 */ NdrFcShort( 0x14 ), /* Offset= 20 (974) */
/* 956 */
0x15,            /*
FC_STRUCT */
0x7,             /*
7 */
/* 958 */ NdrFcShort( 0x10 ), /* 16 */
/* 960 */ 0x6,          /* FC_SHORT */
0x1,             /*
FC_BYTE */
/* 962 */ 0x1,          /* FC_BYTE */
0x8,             /*
FC_LONG */
/* 964 */ 0xb,          /* FC_HYPER */
0x5b,            /*
FC_END */
/* 966 */
0x12, 0x0,       /*
FC_UP */
/* 968 */ NdrFcShort( 0xffff4 ), /* Offset= - 12 (956) */
/* 970 */
0x12, 0x8,       /*
FC_UP [simple_pointer] */
/* 972 */ 0x2,          /* FC_CHAR */
0x5c,            /*
FC_PAD */
/* 974 */
0x1a,            /*
FC_BOGUS_STRUCT */
0x7,             /*
7 */
/* 976 */ NdrFcShort( 0x20 ), /* 32 */
/* 978 */ NdrFcShort( 0x0 ), /* 0 */
/* 980 */ NdrFcShort( 0x0 ), /* Offset= 0 (980) */
/* 982 */ 0x8,          /* FC_LONG */
0x8,             /*
FC_LONG */
/* 984 */ 0x6,          /* FC_SHORT */
0x6,             /*
FC_SHORT */
/* 986 */ 0x6,          /* FC_SHORT */
0x6,             /*
FC_SHORT */
/* 988 */ 0x4c,         /* FC_EMBEDDED_COMPLEX */
*/
0x0,             /*
0 */
/* 990 */ NdrFcShort( 0xfc28 ), /* Offset= - 984 (6) */
/* 992 */ 0x5c,          /* FC_PAD */
0x5b,            /*
FC_END */
/* 994 */ 0xb4,          /* FC_USER_MARSHAL */
0x83,            /*
131 */
/* 996 */ NdrFcShort( 0x0 ), /* 0 */
/* 998 */ NdrFcShort( 0x10 ), /* 16 */
/* 1000 */ NdrFcShort( 0x0 ), /* 0 */
/* 1002 */ NdrFcShort( 0xfc18 ), /* */
Offset= -1000 (2)
/* 1004 */
0x11, 0x4,       /*
FC_RP [allocated_on_stack] */
/* 1006 */ NdrFcShort( 0x6 ), /* Offset= 6 (1012) */
/* 1008 */
0x13, 0x0,       /*
FC_OP */
/* 1010 */ NdrFcShort( 0xffdc ), /* Offset= -36 (974) */
/* 1012 */ 0xb4,          /*
FC_USER_MARSHAL */
0x83,            /*
131 */
/* 1014 */ NdrFcShort( 0x0 ), /* 0 */
/* 1016 */ NdrFcShort( 0x10 ), /* 16 */
/* 1018 */ NdrFcShort( 0x0 ), /* 0 */
/* 1020 */ NdrFcShort( 0xffff4 ), /* */
Offset= -12 (1008)
*/
0x0
}
}

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
{
VARIANT_UserSize
,VARIANT_UserMarshal
,VARIANT_UserUnmarshal
,VARIANT_UserFree
}
};

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFFFFE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0
x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
0,
34,
68,
102,
136,
170
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
&Object_StubDesc,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
&Object_StubDesc,
0,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0,
0
};

CINTERFACE_PROXYVtbl(_ITPCCProxyVtbl =
{
&ITPCC_ProxyInfo,
&IID_ITPCC,
IUnknown_QueryInterface_Proxy,
IUnknown_AddRef_Proxy,
IUnknown_Release_Proxy ,
(void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
(void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
(void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
(void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
(void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
(void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
*/ );
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
&IID_ITPCC,

```

```

    &_ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    0,
    _MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x20000, /* Ndr library version */
    0,
    0x6000169, /* MIDL Version 6.0.361 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* cs routines */
    0, /* proxy/server info */
    0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl * ) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl * ) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(! _tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
    }
}

```

```

        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,
    (const PCIInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};
#endif _MSC_VER >= 1200
#pragma warning(push)
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64) */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf, Wl, Zp8, env=Win64 (32b run, appending)
   protocol : dce , ms_ext, c_ext, robust
   error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
        __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
        DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif
#endif

```

```

#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity */
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef _REDQ_RPCPROXY_H_VERSION_
#define _REQUIRED_RPCPROXY_H_VERSION_ 475
#endif

#include "rpcproxy.h"
#ifndef _RPCPROXY_H_VERSION_
#error this stub requires an updated version of
<rpcproxy.h>
#endif // _RPCPROXY_H_VERSION_

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE    1003
#define PROC_FORMAT_STRING_SIZE   253
#define TRANSMIT_AS_TABLE_SIZE    0
#define WIRE_MARSHAL_TABLE_SIZE   1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short          Pad;
    unsigned char  Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short          Pad;
    unsigned char  Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}}, {2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

```

```

/* Procedure Payment */

/* 44 */ 0x33, /* FC_AUTO_HANDLE */
          /* 0x6c, */ /* */

Old Flags: object, Oi2 /*
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
/* 52 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
                           /* 0x3, */ /* */
3 */
/* 60 */ 0xa, /* 10 */
                           /* 0x7, */ /* */
Ext Flags: new corr desc, clt corr check, srv corr
check, /*
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 70 */ NdrFcShort( 0xb8 ), /* Flags: must size,
must free, in, by val, */
/* 72 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 74 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */

/* 76 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 78 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 80 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */

/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 84 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 86 */ 0x8, /* FC_LONG */
                           /* 0x0, */ /* */
0 */

/* Procedure Delivery */

/* 88 */ 0x33, /* FC_AUTO_HANDLE */
          /* 0x6c, */ /* */

Old Flags: object, Oi2 /*
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
/* 96 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */

```

```

/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47, /* O12 Flags: srv must
size, clt must size, has return, has ext, */
                                         /* 0x3, */ /* */
3 */
/* 104 */ 0xa, /* 10 */
                                         /* 0x7, */ /* */
Ext Flags: new corr desc, clt corr check, srv corr
check, /* */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 116 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 118 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */

/* 120 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 122 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 124 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */

/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 128 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 130 */ 0x8, /* FC_LONG */
                                         /* 0x0, */ /* */
0 */

/* Procedure StockLevel */

/* 132 */ 0x33, /* FC_AUTO_HANDLE */
                                         /* 0x6c, */ /* */
Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
/* 140 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47, /* O12 Flags: srv must
size, clt must size, has return, has ext, */
                                         /* 0x3, */ /* */
3 */
/* 148 */ 0xa, /* 10 */
                                         /* 0x7, */ /* */
Ext Flags: new corr desc, clt corr check, srv corr
check, /* */

```

```

/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 160 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 162 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 166 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 168 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 172 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 174 */ 0x8, /* FC_LONG */
0x0, /* */
0 /*

/* Procedure OrderStatus */

/* 176 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */
Old Flags: object, Oi2 /*
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
/* 184 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* */
3 /* */
/* 192 */ 0xa, /* 10 */
0x7, /* */
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 204 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 206 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 210 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 212 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 216 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 218 */ 0x8, /* FC_LONG */
0x0, /* */
0 /*

/* Procedure CallSetComplete */

/* 220 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */
Old Flags: object, Oi2 /*
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44, /* Oi2 Flags: has
return, has ext, */
0x1, /* */
1 /* */
/* 236 */ 0xa, /* 10 */
0x1, /* */
Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

/* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 250 */ 0x8, /* FC_LONG */
0x0, /* */
0 /*

0x0
};

}

```

```

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
0,
{
NdrFcShort( 0x0 ), /* */
0 /* */
2 /* */
0x12, 0x0, /* */
FC_UP /* */
4 /* */
950 (54) /* */
6 /* */
0x2b, /* */
FC_NON_ENCAPSULATED_UNION /* */
0x9, /* */
FC ULONG /* */
8 /* */
0x7, /* */
FC USHORT /* */
0x0, /* */
10 /* */
NdrFcShort( 0xffff8 ), /* -8 */
12 /* */
NdrFcShort( 0x1 ), /* Corr flags: early, */
/* */
14 /* */
NdrFcShort( 0x2 ), /* Offset= 2 (16) */
16 /* */
NdrFcShort( 0x10 ), /* 16 */
18 /* */
NdrFcShort( 0x2f ), /* 47 */
20 /* */
NdrFcLong( 0x14 ), /* 20 */
24 /* */
NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
26 /* */
NdrFcLong( 0x3 ), /* 3 */
30 /* */
NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
32 /* */
NdrFcLong( 0x11 ), /* 17 */
36 /* */
NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYT */
38 /* */
NdrFcLong( 0x2 ), /* 2 */
42 /* */
NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
44 /* */
NdrFcLong( 0x4 ), /* 4 */
48 /* */
NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
50 /* */
NdrFcLong( 0x5 ), /* 5 */
54 /* */
NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
56 /* */
NdrFcLong( 0xb ), /* 11 */
60 /* */
NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
62 /* */
NdrFcLong( 0xa ), /* 10 */
66 /* */
NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
68 /* */
NdrFcLong( 0x6 ), /* 6 */
72 /* */
NdrFcShort( 0xe8 ), /* Offset= 232 (304) */
74 /* */
NdrFcLong( 0x7 ), /* 7 */
78 /* */
NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
80 /* */
NdrFcLong( 0x8 ), /* 8 */
84 /* */
NdrFcShort( 0xe2 ), /* Offset= 226 (310) */
86 /* */
NdrFcLong( 0xd ), /* 13 */
90 /* */
NdrFcShort( 0xf6 ), /* Offset= 246 (336) */
92 /* */
NdrFcLong( 0x9 ), /* 9 */
96 /* */
NdrFcShort( 0x102 ), /* Offset=
258 (354) */

```

```

/* 98 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 102 */ NdrFcShort( 0x10e ), /* Offset=
270 (372) */
/* 104 */ NdrFcLong( 0x24 ), /* 36 */
/* 108 */ NdrFcShort( 0x304 ), /* Offset=
772 (880) */
/* 110 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 114 */ NdrFcShort( 0x2fe ), /* Offset=
766 (880) */
/* 116 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 120 */ NdrFcShort( 0x2fc ), /* Offset=
764 (884) */
/* 122 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 126 */ NdrFcShort( 0x2fa ), /* Offset=
762 (888) */
/* 128 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 132 */ NdrFcShort( 0x2f8 ), /* Offset=
760 (892) */
/* 134 */ NdrFcLong( 0x4014 ), /* 16404 */
/* 138 */ NdrFcShort( 0x2f6 ), /* Offset=
758 (896) */
/* 140 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 144 */ NdrFcShort( 0x2f4 ), /* Offset=
756 (900) */
/* 146 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 150 */ NdrFcShort( 0x2f2 ), /* Offset=
754 (904) */
/* 152 */ NdrFcLong( 0x400b ), /* 16395 */
/* 156 */ NdrFcShort( 0x2dc ), /* Offset=
732 (888) */
/* 158 */ NdrFcLong( 0x400a ), /* 16394 */
/* 162 */ NdrFcShort( 0x2da ), /* Offset=
730 (892) */
/* 164 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 168 */ NdrFcShort( 0x2e4 ), /* Offset=
740 (908) */
/* 170 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 174 */ NdrFcShort( 0x2da ), /* Offset=
730 (904) */
/* 176 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 180 */ NdrFcShort( 0x2dc ), /* Offset=
732 (912) */
/* 182 */ NdrFcLong( 0x400d ), /* 16397 */
/* 186 */ NdrFcShort( 0x2da ), /* Offset=
730 (916) */
/* 188 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 192 */ NdrFcShort( 0x2d8 ), /* Offset=
728 (920) */
/* 194 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 198 */ NdrFcShort( 0x2d6 ), /* Offset=
726 (924) */
/* 200 */ NdrFcLong( 0x400c ), /* 16396 */
/* 204 */ NdrFcShort( 0x2d4 ), /* Offset=
724 (928) */
/* 206 */ NdrFcLong( 0x10 ), /* 16 */
/* 210 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 212 */ NdrFcLong( 0x12 ), /* 18 */
/* 216 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 218 */ NdrFcLong( 0x13 ), /* 19 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */

```

```

/* 224 */ NdrFcLong( 0x15 ), /* 21 */
/* 228 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 230 */ NdrFcLong( 0x16 ), /* 22 */
/* 234 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 236 */ NdrFcLong( 0x17 ), /* 23 */
/* 240 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 242 */ NdrFcLong( 0xe ), /* 14 */
/* 246 */ NdrFcShort( 0x2b2 ), /* Offset=
690 (936) */
/* 248 */ NdrFcLong( 0x400e ), /* 16398 */
/* 252 */ NdrFcShort( 0x2b6 ), /* Offset=
694 (946) */
/* 254 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 258 */ NdrFcShort( 0x2b4 ), /* Offset=
692 (950) */
/* 260 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 264 */ NdrFcShort( 0x270 ), /* Offset=
624 (888) */
/* 266 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 270 */ NdrFcShort( 0x26e ), /* Offset=
622 (892) */
/* 272 */ NdrFcLong( 0x4015 ), /* 16405 */
/* 276 */ NdrFcShort( 0x26c ), /* Offset=
620 (896) */
/* 278 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 282 */ NdrFcShort( 0x262 ), /* Offset=
610 (892) */
/* 284 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 288 */ NdrFcShort( 0x25c ), /* Offset=
604 (892) */
/* 290 */ NdrFcLong( 0x0 ), /* 0 */
/* 294 */ NdrFcShort( 0x0 ), /* Offset= 0 (294) */
/* 296 */ NdrFcLong( 0x1 ), /* 1 */
/* 300 */ NdrFcShort( 0x0 ), /* Offset= 0 (300) */
/* 302 */ NdrFcShort( 0xffff ), /* Offset= -1
(301) */
/* 304 */ /* 0x15, */
/* FC_STRUCT */
/* 306 */ NdrFcShort( 0x8 ), /* 8 */
/* 308 */ 0xb, /* FC_HYPER */
/* 310 */ /* 0x7, */
/* FC_END */
/* 312 */ NdrFcShort( 0xe ), /* Offset= 14 (326) */
/* 314 */ /* 0x1b, */
/* FC_CARRAY */
/* 316 */ NdrFcShort( 0x2 ), /* 2 */
/* 318 */ 0x9, /* Corr desc: FC ULONG */
/* 320 */ /* 0x0, */
/* 322 */ NdrFcShort( 0xffffc ), /* -4 */

```

```

/* 324 */ 0x6, /* FC_SHORT */
/* 326 */ /* 0x5b, */
/* FC_END */
/* 326 */ /* 0x17, */
/* FC_CSTRUCT */
/* 328 */ NdrFcShort( 0x8 ), /* 8 */
/* 330 */ NdrFcShort( 0xffff0 ), /* Offset= -
16 (314) */
/* 332 */ /* 0x8, */
/* FC_LONG */
/* 334 */ /* 0x5c, */
/* FC_PAD */
/* 336 */ /* 0x5b, */
/* FC_END */
/* 336 */ /* 0x2f, */
/* FC_IP */
/* 338 */ NdrFcLong( 0x0 ), /* 0 */
/* 342 */ NdrFcShort( 0x0 ), /* 0 */
/* 344 */ NdrFcShort( 0x0 ), /* 0 */
/* 346 */ /* 0xc0, */
/* 348 */ /* 0x0, */
/* 350 */ /* 0x0, */
/* 352 */ /* 0x0, */
/* 354 */ /* 0x2f, */
/* FC_IP */
/* 356 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 360 */ NdrFcShort( 0x0 ), /* 0 */
/* 362 */ NdrFcShort( 0x0 ), /* 0 */
/* 364 */ /* 0xc0, */
/* 366 */ /* 0x0, */
/* 368 */ /* 0x0, */
/* 370 */ /* 0x0, */
/* 372 */ /* 0x12, 0x10, */
/* FC_UP [pointer_deref] */
/* 374 */ NdrFcShort( 0x2 ), /* Offset= 2 (376) */

```

```

/* 376 */
0x12, 0x0,      /*
FC_UP */
/* 378 */ NdrFcShort( 0x1e4 ),      /* Offset=
484 (862) */
/* 380 */
0x2a,           /*
FC_EMBEDDED_COMPLEX */
0x89,           /*
137 */
/* 382 */ NdrFcShort( 0x20 ), /* 32 */
/* 384 */ NdrFcShort( 0xa ), /* 10 */
/* 386 */ NdrFcLong( 0x8 ), /* 8 */
/* 390 */ NdrFcShort( 0x50 ), /* Offset= 80 (470) */
/* 392 */ NdrFcLong( 0xd ), /* 13 */
/* 396 */ NdrFcShort( 0x70 ), /* Offset= 112 (508) */
/* 398 */ NdrFcLong( 0x9 ), /* 9 */
/* 402 */ NdrFcShort( 0x90 ), /* Offset= 144 (546) */
/* 404 */ NdrFcLong( 0xc ), /* 12 */
/* 408 */ NdrFcShort( 0xb0 ), /* Offset= 176 (584) */
/* 410 */ NdrFcLong( 0x24 ), /* 36 */
/* 414 */ NdrFcShort( 0x102 ), /* Offset=
258 (672) */
/* 416 */ NdrFcLong( 0x800d ), /* 32781 */
/* 420 */ NdrFcShort( 0x11e ), /* Offset=
286 (706) */
/* 422 */ NdrFcLong( 0x10 ), /* 16 */
/* 426 */ NdrFcShort( 0x138 ), /* Offset=
312 (738) */
/* 428 */ NdrFcLong( 0x2 ), /* 2 */
/* 432 */ NdrFcShort( 0x14e ), /* Offset=
334 (766) */
/* 434 */ NdrFcLong( 0x3 ), /* 3 */
/* 438 */ NdrFcShort( 0x164 ), /* Offset=
356 (794) */
/* 440 */ NdrFcLong( 0x14 ), /* 20 */
/* 444 */ NdrFcShort( 0x17a ), /* Offset=
378 (822) */
/* 446 */ NdrFcShort( 0xfffff ), /* Offset= -1
(445) */
/* 448 */
0x21,           /*
FC_BOOGUS_ARRAY */
0x3,            /*
3 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ 0x19,          /* Corr desc: field
pointer, FC ULONG */
0x0,             /*
*/
/* 454 */ NdrFcShort( 0x0 ), /* 0 */
/* 456 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 458 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 462 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 464 */
0x12, 0x0,      /*
FC_UP */
/* 466 */ NdrFcShort( 0xff74 ), /* Offset= -
140 (326) */
/* 468 */ 0x5c,          /* FC_PAD */
0x5b,           /*
FC_END */
/*
/* 470 */
0x1a,           /*
FC_BOOGUS_STRUCT */
0x3,            /*
3 */
/* 472 */ NdrFcShort( 0x10 ), /* 16 */
/* 474 */ NdrFcShort( 0x0 ), /* 0 */
/* 476 */ NdrFcShort( 0x6 ), /* Offset= 6 (482) */
/* 478 */ 0x8,           /* FC_LONG */
0x40,           /*
FC_STRUCTPAD4 */
/* 480 */ 0x36,           /* FC_POINTER */
0x5b,           /*
FC_END */
/* 482 */
0x11, 0x0,      /*
FC_RP */
/* 484 */ NdrFcShort( 0xffffdc ), /* Offset= -
36 (448) */
/* 486 */
0x21,           /*
FC_BOOGUS_ARRAY */
0x3,            /*
3 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ 0x19,          /* Corr desc: field
pointer, FC ULONG */
0x0,             /*
*/
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 496 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 500 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 502 */ 0x4c,           /* FC_EMBEDDED_COMPLEX */
0x0,             /*
0 */
/* 504 */ NdrFcShort( 0xffff58 ), /* Offset= -
168 (336) */
/* 506 */ 0x5c,           /* FC_PAD */
0x5b,           /*
FC_END */
/* 508 */
0x1a,           /*
FC_BOOGUS_STRUCT */
0x3,            /*
3 */
/* 510 */ NdrFcShort( 0x10 ), /* 16 */
/* 512 */ NdrFcShort( 0x0 ), /* 0 */
/* 514 */ NdrFcShort( 0x6 ), /* Offset= 6 (520) */
/* 516 */ 0x8,           /* FC_LONG */
0x40,           /*
FC_STRUCTPAD4 */
/* 518 */ 0x36,           /* FC_POINTER */
0x5b,           /*
FC_END */
/* 520 */
0x11, 0x0,      /*
FC_RP */
/* 522 */ NdrFcShort( 0xffffdc ), /* Offset= -
36 (486) */
/* 524 */
0x21,           /*
FC_BOOGUS_ARRAY */
0x3,            /*
3 */
/* 546 */ NdrFcShort( 0x0 ), /* 0 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8,           /* FC_LONG */
0x40,           /*
FC_STRUCTPAD4 */
/* 556 */ 0x36,           /* FC_POINTER */
0x5b,           /*
FC_END */
/* 558 */
0x11, 0x0,      /*
FC_RP */
/* 560 */ NdrFcShort( 0xffffdc ), /* Offset= -
36 (524) */
/* 562 */
0x21,           /*
FC_BOOGUS_ARRAY */
0x3,            /*
3 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ 0x19,          /* Corr desc: field
pointer, FC ULONG */
0x0,             /*
*/
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
/* 570 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 572 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 576 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 578 */
0x12, 0x0,      /*
FC_UP */
/* 580 */ NdrFcShort( 0x176 ), /* Offset=
374 (954) */
/* 582 */ 0x5c,          /* FC_PAD */
0x5b,           /*
FC_END */
/*

```

```

FC_END */
/* 584 */
0x5b,           /* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 588 */ NdrFcShort( 0xa ), /* Offset= 10 (646) */
/* 588 */ 0x8,          /* FC_LONG */
/* 590 */ NdrFcShort( 0x6 ), /* Offset= 6 (596) */
/* 592 */ 0x8,          /* FC_LONG */
0x40,           /* 640 */ /* 0x4c,      /* FC_EMBEDDED_COMPLEX
/* 594 */ 0x36,         /* 640 */ /* 0x8,      /* 0
/* 596 */ 0x5b,         /* 640 */ /* 0x4c,      /* FC_POINTER
/* 596 */ 0x11, 0x0,     /* 640 */ /* 0x8,      /* FC_END
/* 598 */ NdrFcShort( 0xffffdc ), /* Offset= -36 (562) */
/* 600 */ 0x2f,         /* 640 */ /* 0x8,      /* FC_UP
/* 602 */ 0x5a,         /* 640 */ /* 0x8,      /* FC_CONSTANT_IID
/* 606 */ NdrFcShort( 0x0 ), /* 0 */
/* 608 */ NdrFcShort( 0x0 ), /* 0 */
/* 610 */ 0xc0,         /* 640 */ /* 0x8,      /* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 612 */ 0x0,          /* 640 */ /* 0x8,      /* 654 */ 0x19,          /* Corr desc: field
/* 614 */ 0x0,          /* 640 */ /* 0x8,      /* pointer, FC ULONG */
0x0,             /* 656 */ NdrFcShort( 0x0 ), /* 0 */
/* 658 */ NdrFcShort( 0x1 ), /* Corr flags: early,
/* 660 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 664 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 666 */ 0x46,         /* 668 */ NdrFcShort( 0xffffda ), /* Offset= -38 (630) */
/* 670 */ 0x5c,         /* 670 */ /* 0x5c,      /* FC_PAD
/* 672 */ 0x1b,         /* 672 */ /* 0x5b,      /* FC_END
/* 674 */ 0x0,          /* 674 */ /* 0x1a,      /* FC_BOGUS_STRUCT
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ NdrFcShort( 0x6 ), /* Offset= 6 (684) */
/* 680 */ 0x8,          /* 680 */ /* 0x8,      /* FC_LONG
0x40,           /* 682 */ /* 0x36,      /* FC_STRUCTPAD4
/* 684 */ 0x5b,         /* 682 */ /* 0x5b,      /* FC_POINTER
/* 684 */ 0x0,          /* 684 */ /* 0x11,      /* FC_END
/* 686 */ NdrFcShort( 0xffffdc ), /* Offset= -36 (650) */
/* 688 */ 0x3,          /* 686 */ /* 0x11,      /* FC_UP
/* 690 */ NdrFcShort( 0x8 ), /* 8 */
/* 692 */ 0x1,          /* 692 */ /* 0x15,      /* FC_BYTE
/* 694 */ 0x5b,         /* 694 */ /* 0x15,      /* FC_END
/* 696 */ NdrFcShort( 0x10 ), /* 16 */
/* 698 */ 0x8,          /* 698 */ /* 0x15,      /* FC_SHORT
/* 700 */ 0x6,          /* 700 */ /* 0x15,      /* FC_EMBEDDED_COMPLEX
/* 702 */ 0x0,          /* 702 */ /* 0x15,      /* 702 */ /* 0x15,      /* 0
/* 704 */ NdrFcShort( 0xfffff1 ), /* Offset= -15 (688) */
0x5b,           /* 706 */ /* 0x1a,      /* FC_END
/* 708 */ NdrFcShort( 0x20 ), /* 32 */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0xa ), /* Offset= 10 (722) */
/* 714 */ 0x8,          /* 714 */ /* 0x15,      /* FC_LONG
0x40,           /* 716 */ /* 0x1a,      /* FC_UP
/* 718 */ 0x0,          /* 718 */ /* 0x15,      /* FC_EMBEDDED_COMPLEX
/* 720 */ NdrFcShort( 0xffffe7 ), /* Offset= -25 (694) */
0x5b,           /* 722 */ /* 0x11,      /* FC_END
/* 724 */ NdrFcShort( 0xffff12 ), /* Offset= -238 (486) */
/* 726 */ 0x1b,         /* 726 */ /* 0x11,      /* FC_CARRAY
/* 728 */ 0x0,          /* 728 */ /* 0x11,      /* FC_UP
/* 730 */ 0x19,         /* 730 */ /* 0x11,      /* Corr desc: field
pointer, FC ULONG */
0x0,             /* 732 */ /* 0x11,      /* 0
/* 734 */ NdrFcShort( 0x0 ), /* 0 */
/* 734 */ NdrFcShort( 0x1 ), /* Corr flags: early,
/* 736 */ 0x1,          /* 736 */ /* 0x11,      /* FC_BYTE

```

```

        0x5b,          /* */
FC_END */          /* 738 */
/* FC_BOGUS_STRUCT */
        0x1a,          /* */
        0x3,           /* */
3 */
/* 740 */ NdrFcShort( 0x10 ), /* 16 */
/* 742 */ NdrFcShort( 0x0 ), /* 0 */
/* 744 */ NdrFcShort( 0x6 ), /* Offset= 6 (750) */
/* 746 */ 0x8,          /* FC_LONG */
        0x40,          /* */
FC_STRUCTPAD4 */
/* 748 */ 0x36,          /* FC_POINTER */
        0x5b,          /* */
FC_END */
/* 750 */
        0x12, 0x0,      /* */
FC_UP */
/* 752 */ NdrFcShort( 0xffe6 ), /* Offset= -26 (726) */
/* 754 */
        0x1b,          /* */
FC_CARRAY */
        0x1,           /* */
1 */
/* 756 */ NdrFcShort( 0x2 ), /* 2 */
/* 758 */ 0x19,          /* Corr desc: field
pointer, FC ULONG */
        0x0,           /* */
/* 760 */ NdrFcShort( 0x0 ), /* 0 */
/* 762 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 764 */ 0x6,          /* FC_SHORT */
        0x5b,          /* */
FC_END */
/* 766 */
        0x1a,          /* */
        0x3,           /* */
3 */
/* 768 */ NdrFcShort( 0x10 ), /* 16 */
/* 770 */ NdrFcShort( 0x0 ), /* 0 */
/* 772 */ NdrFcShort( 0x6 ), /* Offset= 6 (778) */
/* 774 */ 0x8,
        0x40,          /* */
FC_STRUCTPAD4 */
/* 776 */ 0x36,          /* FC_POINTER */
        0x5b,          /* */
FC_END */
/* 778 */
        0x12, 0x0,      /* */
FC_UP */
/* 780 */ NdrFcShort( 0xffe6 ), /* Offset= -26 (754) */
/* 782 */
        0x1b,          /* */
FC_CARRAY */
        0x3,           /* */
3 */
/* 784 */ NdrFcShort( 0x4 ), /* 4 */
        0x5b,          /* */
pointer, FC ULONG */
        0x0,           /* */
/* 786 */ 0x19,          /* Corr desc: field
pointer, FC ULONG */
        0x0,           /* */
/* */
/* 788 */ NdrFcShort( 0x0 ), /* 0 */
/* 790 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* */
/* 792 */ 0x8,           /* FC_LONG */
        0x5b,          /* */
FC_END */
/* 794 */
        0x1a,          /* */
FC_BOGUS_STRUCT */
        0x3,           /* */
3 */
/* 796 */ NdrFcShort( 0x10 ), /* 16 */
/* 798 */ NdrFcShort( 0x0 ), /* 0 */
/* 800 */ NdrFcShort( 0x6 ), /* Offset= 6 (806) */
/* 802 */ 0x8,
        0x40,          /* */
FC_STRUCTPAD4 */
/* 804 */ 0x36,          /* FC_POINTER */
        0x5b,          /* */
FC_END */
/* 806 */
        0x12, 0x0,      /* */
FC_UP */
/* 808 */ NdrFcShort( 0xffe6 ), /* Offset= -26 (782) */
/* 810 */
        0x1b,          /* */
FC_CARRAY */
        0x7,           /* */
7 */
/* 812 */ NdrFcShort( 0x8 ), /* 8 */
/* 814 */ 0x19,          /* Corr desc: field
pointer, FC ULONG */
        0x0,           /* */
/* */
/* 816 */ NdrFcShort( 0x0 ), /* 0 */
/* 818 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* */
/* 820 */ 0xb,
        0x5b,          /* */
FC_END */
/* 822 */
        0x1a,          /* */
FC_BOGUS_STRUCT */
        0x3,           /* */
3 */
/* 824 */ NdrFcShort( 0x10 ), /* 16 */
/* 826 */ NdrFcShort( 0x0 ), /* 0 */
/* 828 */ NdrFcShort( 0x6 ), /* Offset= 6 (834) */
/* 830 */ 0x8,
        0x40,          /* */
FC_STRUCTPAD4 */
/* 832 */ 0x36,          /* FC_POINTER */
        0x5b,          /* */
FC_END */
/* 834 */
        0x12, 0x0,      /* */
FC_UP */
        0x5b,          /* */
/* 836 */ NdrFcShort( 0xfe0f ), /* Offset= -497 (380) */
        0x5b,          /* */
FC_END */
/* 880 */
        0x12, 0x0,      /* */
FC_UP */
        0x15,          /* */
/* 838 */
        0x3,           /* */
3 */
/* 840 */ NdrFcShort( 0x8 ), /* 8 */
/* 842 */ 0x8,
        0x8,           /* */
FC_LONG */
/* 844 */ 0x5c,          /* FC_PAD */
        0x5b,          /* */
FC_END */
/* 846 */
        0x1b,          /* */
FC_CARRAY */
        0x3,           /* */
3 */
/* 848 */ NdrFcShort( 0x8 ), /* 8 */
/* 850 */ 0x7,
        0x0,           /* */
/* Corr desc: FC USHORT */
        0x0,           /* */
/* */
/* 852 */ NdrFcShort( 0xffc8 ), /* -56 */
/* 854 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* */
/* 856 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */
        0x0,           /* */
0 */
/* 858 */ NdrFcShort( 0xffec ), /* Offset= -20 (838) */
/* 860 */ 0x5c,
        0x5b,          /* */
/* FC_PAD */
        0x1a,          /* */
FC_END */
/* 862 */
        0x3,           /* */
3 */
/* 864 */ NdrFcShort( 0x38 ), /* 56 */
/* 866 */ NdrFcShort( 0xffec ), /* Offset= -20 (846) */
/* */
/* 868 */ NdrFcShort( 0x0 ), /* Offset= 0 (868) */
/* 870 */ 0x6,
        0x6,           /* */
/* FC_SHORT */
/* 872 */ 0x8,
        0x8,           /* */
FC_LONG */
/* 874 */ 0x40,
        0x4c,          /* */
/* FC_STRUCTPAD4 */
/* 876 */ 0x0,
        0x0,           /* */
/* 0 */
/* NdrFcShort( 0xfe0f ), */
/* */
/* 880 */
        0x12, 0x0,      /* */
FC_UP */

```

```

/* 882 */ NdrFcShort( 0xff04 ),           /* Offset= -252 (630) */
/* 884 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 886 */ 0x1,           /* FC_BYTE */
FC_PAD */
/* 888 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 890 */ 0x6,           /* FC_SHORT */
FC_PAD */
/* 892 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 894 */ 0x8,           /* FC_LONG */
FC_PAD */
/* 896 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 898 */ 0xb,           /* FC_HYPER */
FC_PAD */
/* 900 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 902 */ 0xa,           /* FC_FLOAT */
FC_PAD */
/* 904 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 906 */ 0xc,           /* FC_DOUBLE */
FC_PAD */
/* 908 */
0x12, 0x0,          /* FC_UP */
/* 910 */ NdrFcShort( 0xfd2a ),           /* Offset= -606 (304) */
/* 912 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfd4 ),            /* Offset= -604 (310) */
/* 916 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0fdb ),             /* Offset= -582 (336) */
/* 920 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0fdc8 ),             /* Offset= -568 (354) */
/* 924 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 926 */ NdrFcShort( 0fd6 ),              /* Offset= -554 (372) */

/* 928 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 930 */ NdrFcShort( 0x2 ),               /* Offset= 2 (932) */
/* 932 */
0x12, 0x0,          /* FC_UP */
/* 934 */ NdrFcShort( 0x14 ),               /* Offset= 20 (954) */
/* 936 */
0x15,                /* FC_STRUCT */
0x7,
/* 938 */ NdrFcShort( 0x10 ),               /* Offset= 16 */
/* 940 */ 0x6,           /* FC_SHORT */
0x1,
/* FC_BYTE */
/* 942 */ 0x1,           /* FC_BYTE */
0x8,
/* FC_LONG */
/* 944 */ 0xb,           /* FC_HYPER */
0x5b,
/* FC_END */
/* 946 */
0x12, 0x0,          /* FC_UP */
/* 948 */ NdrFcShort( 0xffff4 ),            /* Offset= -12 (988) */
/* 950 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 952 */ 0x2,           /* FC_CHAR */
0x5c,
/* FC_PAD */
/* 954 */
0x1a,
/* FC_BOGUS_STRUCT */
0x7,
/* 956 */ NdrFcShort( 0x20 ),               /* Offset= 32 */
/* 958 */ NdrFcShort( 0x0 ),                /* 0 */
/* 960 */ NdrFcShort( 0x0 ),               /* Offset= 0 (960) */
/* 962 */ 0x8,           /* FC_LONG */
0x8,
/* FC_LONG */
/* 964 */ 0x6,           /* FC_SHORT */
0x6,
/* FC_SHORT */
/* 966 */ 0x6,           /* FC_SHORT */
0x6,
/* FC_SHORT */
/* 968 */ 0x4c,           /* FC_EMBEDDED_COMPLEX */
0x0,
/* 970 */ NdrFcShort( 0xfc3c ),             /* Offset= -964 (6) */
/* 972 */ 0x5c,           /* FC_PAD */
0x5b,
/* FC_END */
/* 974 */ 0xb4,           /* FC_USER_MARSHAL */
0x83,
/* 976 */ NdrFcShort( 0x0 ),               /* 0 */
/* 978 */ NdrFcShort( 0x18 ),               /* 24 */
/* 980 */ NdrFcShort( 0x0 ),               /* 0 */
/* 982 */ NdrFcShort( 0xfc2c ),             /* Offset= -980 (2) */
/* 984 */
0x11, 0x4,          /* FC_RP [alloced_on_stack] */
/* 986 */ NdrFcShort( 0x6 ),               /* Offset= 6 (992) */
/* 988 */
0x13, 0x0,          /* FC_OP */
/* 990 */ NdrFcShort( 0xffdc ),             /* Offset= -36 (954) */
/* 992 */ 0xb4,           /* FC_USER_MARSHAL */
0x83,
/* 994 */ NdrFcShort( 0x0 ),               /* 0 */
/* 996 */ NdrFcShort( 0x18 ),               /* 24 */
/* 998 */ NdrFcShort( 0x0 ),               /* 0 */
/* 1000 */ NdrFcShort( 0xffff4 ),             /* Offset= -12 (988) */
0x0
};

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize,
        VARIANT_UserMarshal,
        VARIANT_UserUnmarshal,
        VARIANT_UserFree
    }
};

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFFFFE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =

```

```

{
0,
44,
88,
132,
176,
220
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
&Object_StubDesc,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
&Object_StubDesc,
0,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0,
0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
0,
NdrOleAllocate,
NdrOleFree,
0,
0
};

```

```

0,
0,
0,
__MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x50002, /* Ndr library version */
0,
0x6000169, /* MIDL Version 6.0.361 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* cs routines */
0, /* proxy/server info */
0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    (CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    (CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define __tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall __tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(!__tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,

```

```

    (const PCInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
0, // no delegation
& _tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uuid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0 /* Filler3 */
};

#endif /* _MSC_VER >= 1200
#pragma warning(pop)
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64) */

```

tpcc_dblib.cpp

```

/*      FILE:          TPCC_DBLIB.CPP
*           Microsoft
TPC-C Kit Ver. 4.42.000
*           Copyright
Microsoft, 2002
*                           All Rights Reserved
*
*                           Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*      PURPOSE:  Implements dblib calls for TPC-C
txns.
*      Contact: Charles Levine
(clevine@microsoft.com)
*
*      Change history:
*          4.42.000 - changed w_id fields
from short to long to support >32K warehouses
*          4.20.000 - updated rev number to
match kit
*          4.10.001 - not deleting error
class in catch handler on deadlock retry;
*                           not a
functional bug, but a memory leak
*                           - had to
tweak some declarations to compile with latest SDK;
no functional change
*/
#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

```

```

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "../common/src/error.h"
#include "../common/src/trans.h"
#include "../common/src/txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE
4096

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const int iMaxRetries = 10;
// how many retries on deadlock
static long iConnectionCount = 0; // number
of current dblib connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit(); // initialize dblib
            break;

        case DLL_PROCESS_DETACH:
            dbexit(); // close all dblib structures/connections
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity,
dberr, oserr, dberrstr, oserrstr );
    }
}

```

```

        return INT_CANCEL;
    }

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT
msgno, int msgstate, int severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library
SQL Server error messages
*
* ARGUMENTS: DBPROCESS          *dbproc
           DBPROCESS id pointer
*           DBINT
*           msgno
           message number
*           int
*           msgstate
           message state
*           int
*           severity
           message severity
*           char
*           *msgtext
           printable
message description
*
* RETURNS:      int
               INT_CONTINUE   continue if
error is SQLETIME else INT_CANCEL action
*
               INT_CANCEL
cancel operation
*
* COMMENTS: This function also sets the dead
lock dbproc variable if necessary.
*/
// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS,
DBINT, INT, INT, LPCSTR, LPCSTR, LPCSTR,
DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity,
LPCSTR
msgtext, LPCSTR srvname, LPCSTR procname, DBUSMALLINT
line)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno,
msgstate, severity, msgtext );
    }
    return 0;
}

```

```

/* FUNCTION: void UtilStrCpy(char * pDest, char *
pSrc, int n)
*
* PURPOSE: This function copies n characters
from string pSrc to pDst and places a
null character at the
end of the destination string.
*
* ARGUMENTS: char
*             *pDest destination string pointer
*             char
*             *pSrc source string pointer
*             int
*             n
           number of characters to copy
*
* RETURNS: None
*
* COMMENTS: Unlike strncpy this function
ensures that the result string is
terminated. always null
*/
inline static void UtilStrCpy(char * pDest, const
BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*/
char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id.name." },
        { ERR_NO SUCH ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { 0, "" }
    };
}

```

```

static char szNotFound[] = "Unknown error
number.";

for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_errno ==
errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer, // name of
SQL server
    LPCSTR szUser, // user name for login
    LPCSTR szPassword, // password
for login
    LPCSTR szHost, // workstation name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase ) // name of
database to use
{
    return new CTPCC_DBLIB( szServer, szUser,
szPassword, szHost, szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer, // name of
SQL server
    LPCSTR szUser, // user name for login
    LPCSTR szPassword, // password
for login
    LPCSTR szHost, // workstation name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase ) // name of
database to use
{
    LOGINREC *login;
    const BYTE *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

    m_MaxRetries = 10; // how many
retries on deadlock

    // increase max number of connections if
getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5)
)
    {

```

```

        if (
dbsetmaxprocs(iConnectionCount+10) == FAIL )
            ThrowError(CDBLIBERR::eDbSetMaxProcs);
        }

        // allocate a login structure
        login = dblogin();
        if (login == NULL)
            ThrowError(CDBLIBERR::eLogin);
        InterlockedIncrement( &iConnectionCount );

        // register error and message handler
functions
        if (dbprocerrhandle(login, err_handler) ==
NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        if (dbprocmsgshandle(login, msg_handler) ==
NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        DBSETLUSER(login, szUser);
        DBSETLPWD(login, szPassword);
        DBSETLHOST(login, szHost);
        DBSETLPACKET(login, (unsigned
short)DEFCLPACKSIZE);
        DBSETLVERSION(login, DBVER60);
        // use dblib ver 6.0 client behavior

        // set time to wait for login
        if (dbsetlogintime(60) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        // set time to wait for statement execution
        if (dbsettime(180) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        m_dbproc = dbopen(login, szServer);
        // deallocate login structure before
        // checking for success
        dbfreelogin( login );

        if (m_dbproc == NULL)
            ThrowError(CDBLIBERR::eDbOpen);

        // save address of class instance so that
        // the message and error handler
        // can get to data.
        dbsetuserdata(m_dbproc, (LPVOID)this);

        // Use the the right database
        if (dbuse(m_dbproc, szDatabase) == FAIL)
            ThrowError(CDBLIBERR::eDbUse);

        dbcmd(m_dbproc, "set nocount on ");
        // do not return row counts
        dbcmd(m_dbproc, "set XACT_ABORT ON ");
        // rollback transaction on abort

```

```

        if (dbsqlexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbSqlExec);
        DiscardNextResults(2);

        // verify that version of stored procs on
server is correct
        dbrpcinit(m_dbproc, "tpcc_version", 0);

        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        char szSrvVersion[16];
        pData=dbdata(m_dbproc, 1);
        if (pData)
            UtilStrCpy(szSrvVersion, pData,
dbdatlen(m_dbproc, 1));
        else
            szSrvVersion[0]=0;
        if (strcmp(szSrvVersion,sVersion))
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

        DiscardNextRows(0);
        DiscardNextResults(0);
    }

    CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate
    // resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new
CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

    if (dberrstr != NULL)
    {

```

```

        m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
strcpy( m_DbLibErr->m_dberrstr,
dberrstr );
}

if (oserrstr != NULL)
{
    m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
strcpy( m_DbLibErr->m_oserrstr,
oserrstr );
}
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno,
int msgstate, int severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[
strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext,
msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first;  if
yes, throw it and ignore any DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLERR *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our
pointer to instance; catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to
happen, since it means that an error was returned
        // but the error handlers were
not called.
        pDbLibErr = new
CDBLIBERR(eAction);
    else

```

```

    {
        pDbLibErr = m_DbLibErr;
        pDbLibErr->m_eAction = eAction;
        m_DbLibErr = NULL; // clear our
pointer to instance; catch handler will delete
    }

    throw pDbLibErr;
}

// Read and discard rows until no more. Throw an
exception if number of rows read doesn't
// match number of rows expected. The row count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int             iRowsRead = 0;
    RETCODE         rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }

    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iRowsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

// Read and discard results until no more. Throw an
exception if number of result sets read doesn't
// match number expected. The result set count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int iExpectedCount)
{
    int             iResultsRead = 0;
    RETCODE         rc;

    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)

```

```

            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbResults);
            else
                break;
        }
        DiscardNextRows(-1);
        iResultsRead++;
    }

    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iResultsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

void CTPCC_DBLIB::StockLevel()
{
    int             iTryCount =
0;
    const BYTE      *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_stocklevel", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *) &m_txn.StockLevel.w_id); // @w_id int
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *) &m_txn.StockLevel.d_id); // @d_id
            tinyint
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *) &m_txn.StockLevel.threshold); // @threshhold
            smallint
            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);
        }
    }
}

```

```

if
(pData=dbdata(m_dbproc, 1))

    m_txn.StockLevel.low_stock = *((long *)
pData);

    DiscardNextRows(0);
DiscardNextResults(0);

m_txn.StockLevel.exec_status_code = eOK;
return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
||

== iErrOleDbProvider &&
strstr(e->m_sgtext, sErrTimeoutExpired) != NULL) &&
<= iMaxRetries)
{
    // hit
deadlock; backoff for increasingly longer period
    delete e;
    Sleep(10 *
iTryCount);
}
else
    throw;
}
// while (TRUE)

//if (iTryCount)
//    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                                i;
    DBINT                               commit_flag;
    DBDATETIME                          datetime;
    DBDATEREC                           daterec;

    int                                iTryCount =
0;
    const BYTE                          *pData;
    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_neworder", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o.ol_cnt);
            // check whether any
order lines are for a remote warehouse
            m_txn.NewOrder.o_all_local = 1;
            for (i = 0; i <
m_txn.NewOrder.o.ol_cnt; i++)
            {
                if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                    break;
                }
            }
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_all_local);
            for (i = 0; i <
m_txn.NewOrder.o.ol_cnt; i++)
            {
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
            }
            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            // Get order line
            results
            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
i < m_txn.NewOrder.o.ol_cnt; i++)
            {
                // get remaining values
for w_tax, d_tax, o_id, c_last, c_discount, c_credit,
o_entry_d, commit_flag
                if
(dbresults(m_dbproc) != SUCCEED)
                    ThrowError(CDBLIBERR::eDbResults);
                if
(dbnumcols(m_dbproc) != 5)
                    ThrowError(CDBLIBERR::eWrongNumCols);
                if
(dbnextrow(m_dbproc) != REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);
                if(pData=dbdata(m_dbproc, 1))
                    UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name,
pData, dbdatlen(m_dbproc, 1));
                if(pData=dbdata(m_dbproc, 2))
                    m_txn.NewOrder.OL[i].ol_stock =
(*DBSMALLINT *) pData;
                if(pData=dbdata(m_dbproc, 3))
                    UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_ge-
neric, pData, dbdatlen(m_dbproc, 3));
                if(pData=dbdata(m_dbproc, 4))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);
                if(pData=dbdata(m_dbproc, 5))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amout, 8);
                m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount +
m_txn.NewOrder.OL[i].ol_amout;
            }
            DiscardNextRows(0);
        }
    }
}

```

```

        if (dbresults(m_dbproc)
!= SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);
    if (dbnextrow(m_dbproc)
!= REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);
    if (dbnumcols(m_dbproc)
!= 8)
    ThrowError(CDBLIBERR::eWrongNumCols);
    if
(pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);
        if
(pData=dbdata(m_dbproc, 2))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);
        if
(pData=dbdata(m_dbproc, 3))

        m_txn.NewOrder.o_id = (*DBINT * ) pData;
        if
(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))
        {
            datetime =
*((DBDATETIME * ) pData);

            dbdatecrack(m_dbproc, &daterec, &datetime);
            m_txn.NewOrder.o_entry_d.year =
daterec.year;

```



```

        m_txn.NewOrder.o_entry_d.month =
daterec.month;

        m_txn.NewOrder.o_entry_d.day =
daterec.day;

        m_txn.NewOrder.o_entry_d.hour =
daterec.hour;

        m_txn.NewOrder.o_entry_d.minute =
daterec.minute;

        m_txn.NewOrder.o_entry_d.second =
daterec.second;
    }
    if
(pData=dbdata(m_dbproc, 8))
        commit_flag =
(*DBTINYINT * ) pData;

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (commit_flag == 1)
    {
        m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

        m_txn.NewOrder.exec_status_code = eOK;
    }
    else
        m_txn.NewOrder.exec_status_code =
eInvalidItem;

        return;
    }
    catch (CSQLErr *e)
    {
        if ((e->m_msgno == 1205
|| (e->m_msgno
== iErrOleDbProvider &&
strstr(e-
>m_msgrtext, sErrTimeoutExpired) != NULL)) &&
<= iMaxRetries)
        {
            // hit
deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
}
// while (TRUE)

```



```

//     if (iTryCount)
//         throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME           datetime;
    DBDATEREC daterec;
    int                  iTryCount =
0;
    const BYTE            *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_payment", 0);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLFLT8, -1, -1, (BYTE *)
&m_txn.Payment.h_amount);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.c_d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_id);
            // if customer id is
zero, then payment is by name
            if (m_txn.Payment.c_id
== 0)

                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char
*)m_txn.Payment.c_last);
            if (dbrpcexec(m_dbproc
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            if (dbresults(m_dbproc
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

```

```

!= REG_ROW)                                if (dbnextrow(m_dbproc)
                                         ThrowError(CDBLIBERR::eDbNextRow);
                                         if (dbnumcols(m_dbproc)
!= 27)
                                         ThrowError(CDBLIBERR::eWrongNumCols);
                                         if
(pData=dbdata(m_dbproc, 1))
                                         m_txn.Payment.c_id = *((DBINT *) pData);
                                         if
(pData=dbdata(m_dbproc, 2))
                                         UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));
                                         if
(pData=dbdata(m_dbproc, 3))
                                         {
                                         datetime =
*((DBDATETIME *) pData);
                                         dbdatecrack(m_dbproc, &daterec, &datetime);
                                         m_txn.Payment.h_date.year = daterec.year;
                                         m_txn.Payment.h_date.month =
daterec.month;
                                         m_txn.Payment.h_date.day = daterec.day;
                                         m_txn.Payment.h_date.hour = daterec.hour;
                                         m_txn.Payment.h_date.minute =
daterec.minute;
                                         m_txn.Payment.h_date.second =
daterec.second;
                                         }
                                         if
(pData=dbdata(m_dbproc, 4))
                                         UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
                                         if
(pData=dbdata(m_dbproc, 5))
                                         UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
                                         if
(pData=dbdata(m_dbproc, 6))
                                         UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
                                         if
(pData=dbdata(m_dbproc, 7))
                                         UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));
                                         if
(dbnextrow(m_dbproc)
                                         ThrowError(CDBLIBERR::eDbNextRow);
                                         if (dbnumcols(m_dbproc)
!= 27)
                                         ThrowError(CDBLIBERR::eWrongNumCols);
                                         if
(pData=dbdata(m_dbproc, 8))
                                         UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
                                         if
(pData=dbdata(m_dbproc, 9))
                                         UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
                                         if
(pData=dbdata(m_dbproc, 10))
                                         UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
                                         if
(pData=dbdata(m_dbproc, 11))
                                         UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
                                         if
(pData=dbdata(m_dbproc, 12))
                                         UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
                                         if
(pData=dbdata(m_dbproc, 13))
                                         UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
                                         if
(pData=dbdata(m_dbproc, 14))
                                         UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));
                                         if
(pData=dbdata(m_dbproc, 15))
                                         UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
                                         if
(pData=dbdata(m_dbproc, 16))
                                         UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
                                         if
(pData=dbdata(m_dbproc, 17))
                                         UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
                                         if
(pData=dbdata(m_dbproc, 18))
                                         UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
                                         if
(pData=dbdata(m_dbproc, 19))
                                         UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
                                         if
(pData=dbdata(m_dbproc, 20))
                                         UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
                                         if
UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
                                         if
(pData=dbdata(m_dbproc, 21))
                                         UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
                                         if
(pData=dbdata(m_dbproc, 22))
                                         {
                                         datetime =
*((DBDATETIME *) pData);
                                         dbdatecrack(m_dbproc, &daterec, &datetime);
                                         m_txn.Payment.c_since.year =
daterec.year;
                                         m_txn.Payment.c_since.month =
daterec.month;
                                         m_txn.Payment.c_since.day = daterec.day;
                                         m_txn.Payment.c_since.hour = daterec.hour;
                                         m_txn.Payment.c_since.minute =
daterec.minute;
                                         m_txn.Payment.c_since.second =
daterec.second;
                                         }
                                         if(pData=dbdata(m_dbproc, 23))
                                         UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
                                         if(pData=dbdata(m_dbproc, 24))
                                         dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 24), SQLFLT8, (BYTE *)&m_txn.Payment.c_credit_lim, 8);
                                         if(pData=dbdata(m_dbproc, 25))
                                         dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 25), SQLFLT8, (BYTE *)&m_txn.Payment.c_discount, 8);
                                         if(pData=dbdata(m_dbproc, 26))
                                         dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 26), SQLFLT8, (BYTE *)&m_txn.Payment.c_balance, 8);
                                         if(pData=dbdata(m_dbproc, 27))
                                         UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));
                                         DiscardNextRows(0);

```

```

        DiscardNextResults(0);

        if (m_txn.Payment.c_id
== 0)
            throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else
            m_txn.Payment.exec_status_code = eOK;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
|| iErrOleDbProvider &&
        strstr(e->m_sgtext, sErrTimeoutExpired) != NULL) &&
        (<= iMaxRetries))
        {
            // hit
deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)

//     if (iTryCount)
//         throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int i;
    DBDATETIME datetime;
    DBDATEREC daterec;

    int iTryCount =
0;
    RETCODE rc;
    const BYTE *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_orderstatus", 0);

```

```

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.OrderStatus.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.c_id);

            // if customer id is
zero, then order status is by name
            if
(m_txn.OrderStatus.c_id == 0)

                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            // Get order lines
            if (dbresults(m_dbproc)
!= SUCCEED)
                {
                    if
((m_DbLibErr == NULL) && (m_SqlErr == NULL))

                        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO SUCH ORDER );
                    else
                        ThrowError(CDBLIBERR::eDbResults);
                }
            if (dbnumcols(m_dbproc)
!= 5)
                ThrowError(CDBLIBERR::eWrongNumCols);

            i = 0;
            while (TRUE)
            {
                rc =
dbnextrow(m_dbproc);
                if (rc ==
NO_MORE_ROWS)
                    break;
                if (rc !=
REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);

                if(pData=dbdata(m_dbproc, 1))
                    m_txn.OrderStatus.OL[i].ol_supply_w_id =
(*DBSMALLINT *) pData);

```

```

                if(pData=dbdata(m_dbproc, 2))
                    m_txn.OrderStatus.OL[i].ol_i_id = (*(DBINT
*) pData);

                if(pData=dbdata(m_dbproc, 3))
                    m_txn.OrderStatus.OL[i].ol_quantity =
(*DBSMALLINT *) pData);

                if(pData=dbdata(m_dbproc, 4))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.OL[i].ol_amount, 8);

                if(pData=dbdata(m_dbproc, 5))
                {
                    datetime = *((DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.OrderStatus.OL[i].ol_delivery_d.year =
daterec.year;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.month =
daterec.month;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.day =
daterec.day;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.hour =
daterec.hour;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.minute =
daterec.minute;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.second =
daterec.second;
                }
                i++;
            }
            m_txn.OrderStatus.o.ol_cnt = i;

            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);
            if (dbnumcols(m_dbproc)
!= 8)

```

```

ThrowErrorHandler(CDBLIBERR::eWrongNumCols);

if(pData=dbdata(m_dbproc, 1))
    m_txn.OrderStatus.c_id = (*DBINT *)pData;

if(pData=dbdata(m_dbproc, 2))
    UtilStrCpy(m_txn.OrderStatus.c_last, pData,
    dbdatlen(m_dbproc,2));

if(pData=dbdata(m_dbproc, 3))
    UtilStrCpy(m_txn.OrderStatus.c_first,
    pData, dbdatlen(m_dbproc,3));

if(pData=dbdata(m_dbproc, 4))
    UtilStrCpy(m_txn.OrderStatus.c_middle,
    pData, dbdatlen(m_dbproc, 4));

if(pData=dbdata(m_dbproc, 5))
{
    datetime =
*((DBDATETIME *) pData);

    dbdatecrack(m_dbproc, &daterec, &datetime);

    m_txn.OrderStatus.o_entry_d.year =
daterec.year;

    m_txn.OrderStatus.o_entry_d.month =
daterec.month;

    m_txn.OrderStatus.o_entry_d.day =
daterec.day;

    m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;

    m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;

    m_txn.OrderStatus.o_entry_d.second =
daterec.second;
}

if(pData=dbdata(m_dbproc, 6))
    m_txn.OrderStatus.o_carrier_id =
(*DBSMALLINT *)pData;

if(pData=dbdata(m_dbproc, 7))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,7),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.c_balance);

```

```

if(pData=dbdata(m_dbproc, 8))
    m_txn.OrderStatus.o_id = (*DBINT *)pData;

DiscardNextRows(0);
DiscardNextResults(0);

if
(m_txn.OrderStatus.o.ol_cnt == 0)           throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER
);
else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c.last[0] == 0)           throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
else

m_txn.OrderStatus.exec_status_code = eOK;
return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
||          (e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_msgrtext, sErrTimeoutExpired) != NULL)) &&
(iTryCount
<= iMaxRetries))
    {
        // hit
deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)
}
// if (iTryCount)
//     throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int
    int
    i;
    iTryCount =
0;
    const BYTE
    *pData;
    ResetError();
}

```

```

while (TRUE)
{
    try
    {
        dbrpcinit(m_dbproc,
"tpcc_delivery", 0);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.o_carrier_id);
        if (dbrpcexec(m_dbproc)
== FAIL)
            ThrowErrorHandler(CDBLIBERR::eDbRpcExec);
        if (dbresults(m_dbproc)
!= SUCCEED)
            ThrowErrorHandler(CDBLIBERR::eDbResults);
        if (dbnextrow(m_dbproc)
!= REG_ROW)
            ThrowErrorHandler(CDBLIBERR::eDbNextRow);
        if (dbnumcols(m_dbproc)
!= 10)
            ThrowErrorHandler(CDBLIBERR::eWrongNumCols);
        for (i=0; i<10; i++)
        {
            if (pData =
dbdata(m_dbproc, i+1))
                m_txn.Delivery.o_id[i] = *((DBINT *)pData);
            DiscardNextRows(0);
            DiscardNextResults(0);

            m_txn.Delivery.exec_status_code = eOK;
            return;
        }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno == 1205
||          (e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_msgrtext, sErrTimeoutExpired) != NULL)) &&
(iTryCount
<= iMaxRetries))
            {
                // hit
deadlock; backoff for increasingly longer period
            }
}
}

```

```

        delete e;
        Sleep(10 *
iTtryCount);
    }
    else
        throw;
}
} // while (TRUE)

// if (iTtryCount)
//     throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTtryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }
    return;
}

```

tpcc_odbc.cpp

```

/*      FILE:          TPCC_ODBC.CPP
 *      Microsoft
TPC-C Kit Ver. 4.42.000
 *      Copyright
Microsoft, 2002
 *          All Rights Reserved
 *
 *          Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 *      PURPOSE: Implements ODBC calls for TPC-C
txns.
 *      Contact: Charles Levine
(clevine@microsoft.com)
 *
 *      Change history:
 *          4.42.000 - changed w_id fields
from short to long to support >32K warehouses
 *          4.20.000 - updated rev number to
match kit
 *          4.10.001 - not deleting error
class in catch handler on deadlock retry;
 *          not a
functional bug, but a memory leak
 */
#include <windows.h>
#include <stdio.h>

```

```

#include <assert.h>

#define DBNTWIN32
#include <sqatypes.h>
#include <sql.h>
#include <sqlext.h>

//define COMPILE_FOR_SNAC // define that to
compile for SQL Native Client; comment out to use
MDAC

#ifndef COMPILE_FOR_SNAC
#include <odbcss.h>
#else
// Compile for SNAC
#include <sqlncli.h>
#endif

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl _declspec( dllexport )

#include "...\\common\\src\\error.h"
#include "...\\common\\src\\trans.h"
#include "...\\common\\src\\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from
tpcc_version stored proc
const char           sVersion[] = "4.20.000";

const iMaxRetries = 3;           // how many
retries on deadlock
//const iMaxRetries = 0;           // for
debugging

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV;           // ODBC environment handle

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv) != SQL_SUCCESS )
                return FALSE;
            break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)
                SQLFreeEnv(henv);
    }
}

```

```

break;

default: /* nothing */
}

return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
 */
char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { ERR_INVALID_NEW_ORDER_PARAM,
        "New Order parameter invalid." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer,           // name of
SQL server
LPCSTR szUser,             // user name for login
LPCSTR szPassword,         // password
for login

```

```

LPCSTR szHost,           //  

not used    LPCSTR szDatabase,      // name of  

database to use    LPCSTR szSPPrefix,     // prefix to  

append to the stored procedure names    BOOL bCallNoDuplicatesNewOrder ) // whether  

to check for non-duplicate items in NewOrder and call  

a new SP  

{  

    return new CTPCC_ODBC( szServer, szUser,  

szPassword, szHost, szDatabase, szSPPrefix,  

bCallNoDuplicatesNewOrder );  

}  

CTPCC_ODBC::CTPCC_ODBC (  

    LPCSTR szServer,  

// name of SQL server  

    LPCSTR szUser,  

// user name for login  

    LPCSTR szPassword,  

// password for login  

    LPCSTR szHost,  

// not used  

    LPCSTR szDatabase,  

// name of database to use  

    LPCSTR szSPPrefix,  

// prefix to append to the stored procedure  

names    BOOL        bCallNoDuplicatesNewOrder //  

whether to check for non-duplicate items in NewOrder  

and call a new SP  

)  

:  

m_bCallNoDuplicatesNewOrder(bCallNoDuplicatesNewOrder  

)  

{  

    RETCODE          rc;  

// initialization  

m_hdbc = SQL_NULL_HDBC;  

m_hstmt = SQL_NULL_HSTMT;  

m_hstmtNewOrder = SQL_NULL_HSTMT;  

m_hstmtPayment = SQL_NULL_HSTMT;  

m_hstmtDelivery = SQL_NULL_HSTMT;  

m_hstmtOrderStatus = SQL_NULL_HSTMT;  

m_hstmtStockLevel = SQL_NULL_HSTMT;  

m_descNewOrderCols1 = SQL_NULL_HDESC;  

m_descNewOrderCols2 = SQL_NULL_HDESC;  

m_descOrderStatusCols1 = SQL_NULL_HDESC;  

m_descOrderStatusCols2 = SQL_NULL_HDESC;  

wcscpy(m_szSPPrefix, szSPPrefix,  

sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));  

if ( SQLAllocHandle(SQL_HANDLE_DBC, henv,  

&m_hdbc) != SQL_SUCCESS )  

    ThrowError(CODBCERR::eAllocHandle);
}

```

```

    if ( SQLSetConnectOption(m_hdbc,  

SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )  

        ThrowError(CODBCERR::eConnOption);  

{  

    char szConnectStr[256];  

    char szOutStr[1024];  

    SQLSMALLINT iOutStrLen;  

#ifndef COMPILE_FOR_SNAC  

    sprintf( szConnectStr,  

"DRIVER=SQL  

Server:SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",  

szServer, szUser,  

szPassword, szDatabase );  

#else  

    // Compile for SNAC  

    sprintf( szConnectStr,  

"DRIVER=SQL Native  

Client:SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",  

szServer, szUser,  

szPassword, szDatabase );  

#endif  

    rc = SQLDriverConnect(m_hdbc,  

NULL, (SQLCHAR*)szConnectStr, sizeof(szConnectStr),  

(SQLCHAR*)szOutStr,  

sizeof(szOutStr), &iOutStrLen, SQL_DRIVER_NOPROMPT );  

    if ( rc != SQL_SUCCESS && rc !=  

SQL_SUCCESS_WITH_INFO )  

        ThrowError(CODBCERR::eConnect);  

    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,  

&m_hstmt) != SQL_SUCCESS )  

        ThrowError(CODBCERR::eAllocHandle);  

{  

    char buffer[128];  

// set some options affecting  

connection behavior  

    strcpy(buffer, "set nocount on  

set XACT_ABORT ON");  

    rc = SQLExecDirect(m_hstmt,  

(unsigned char *)buffer, SQL_NTS);  

    if ( rc != SQL_SUCCESS && rc !=  

SQL_SUCCESS_WITH_INFO )  

        ThrowError(CODBCERR::eExecDirect);  

// verify that version of stored  

procs on server is correct  

    char db_sp_version[10];  

    strcpy(buffer, "{call  

tpcc_version}");  

}

```

```

    rc = SQLExecDirect(m_hstmt,  

(unsigned char *)buffer, SQL_NTS);  

    if ( rc != SQL_SUCCESS && rc !=  

SQL_SUCCESS_WITH_INFO )  

        ThrowError(CODBCERR::eExecDirect);  

    if ( SQLBindCol(m_hstmt, 1,  

SQL_C_CHAR, &db_sp_version, sizeof(db_sp_version),  

NULL) != SQL_SUCCESS )  

        ThrowError(CODBCERR::eBindCol);  

    if ( SQLFetch(m_hstmt) ==  

SQL_ERROR )  

        ThrowError(CODBCERR::eFetch);  

    if (strcmp(db_sp_version,sVersion))  

        throw new  

CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION  

);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmt);  

// Bind parameters for each of the  

transactions  

    InitNewOrderParams();  

    InitPaymentParams();  

    InitOrderStatusParams();  

    InitDeliveryParams();  

    InitStockLevelParams();  

}  

CTPCC_ODBC::~CTPCC_ODBC( void )  

{  

    // note: descriptors are automatically  

released when the connection is dropped  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtNewOrder);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtPayment);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtDelivery);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtOrderStatus);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtStockLevel);  

    SQLDisconnect(m_hdbc);  

    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);  

}  

//void CTPCC_ODBC::ThrowError( CODBCERR::ACTION  

eAction )  

void CTPCC_ODBC::ThrowError( RETCODE eAction )  

{  

    RETCODE          rc;  

    SDWORD          lNativeError;  

    char            szState[6];  

    char            szMsg[SQL_MAX_MESSAGE_LENGTH];
}

```

```

char
szTmp[6*SQL_MAX_MESSAGE_LENGTH];
CODOBCERR *pODBCErr;
// not allocated until needed (maybe never)

pODBCErr = new CODOBCERR();

pODBCErr->m_NativeError = 0;
//pODBCErr->m_eAction = eAction;
pODBCErr->m_eAction =
(CODOBCERR::ACTION)eAction;
pODBCErr->m_bDeadLock = FALSE;

szTmp[0] = 0;
szMsg[0] = 0;
while (TRUE)
{
    rc = SQLAllocHandle(henv, m_hdrc,
m_hstmt, (BYTE *)&szState, &lNativeError,
(BYTE *)&szMsg, sizeof(szMsg), NULL);
    if (rc == SQL_NO_DATA)
    {
        break;
    }

    if (rc != SQL_SUCCESS)
    {
        break;
    }

    // check for deadlock
    if (lNativeError == 1205 ||
(lNativeError == iErrOleDbProvider &
strstr(szMsg,
sErrTimeoutExpired) != NULL))
        pODBCErr->m_bDeadLock =
TRUE;

    // capture the (first) database
error
    if (pODBCErr->m_NativeError == 0
&& lNativeError != 0)
        pODBCErr->m_NativeError
= lNativeError;

    // quit if there isn't enough
room to concatenate error text
    if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
        break;

    // include line break after first
error msg
    if (szTmp[0] != 0)
        strcat( szTmp, "\n");
    strcat( szTmp, szMsg );
}

if (pODBCErr->m_odbccerrstr != NULL)
{
    delete [] pODBCErr->m_odbccerrstr;
    pODBCErr->m_odbccerrstr = NULL;
}

```

```

    }

    if (strlen(szTmp) > 0)
    {
        pODBCErr->m_odbccerrstr = new
char[ strlen(szTmp)+1 ];
strcpy( pODBCErr->m_odbccerrstr,
szTmp );
    }

    SQLFreeStmt(m_hstmt, SQL_CLOSE);
    throw pODBCErr;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdrc, &m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(CODOBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODOBCERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODOBCERR::eBindCol);

    //Compose Stock Level statement
    _snwprintf(m_szStockLevelCommand,
sizeof(m_szStockLevelCommand)/sizeof(m_szStockLevelCommand[0]),
L"(call %stpcc_stocklevel
(?, ?, ?))", m_szSPPrefix);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE rc;
    int iTryCount = 0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {

```

```

            rc =
SQLExecDirectW(m_hstmt, m_szStockLevelCommand,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODOBCERR::eExecDirect);
            if ( SQLFetch(m_hstmt)
== SQL_ERROR )
                ThrowError(CODOBCERR::eFetch);
            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            m_txn.StockLevel.exec_status_code = eOK;
            break;
        }
        catch (CODOBCERR *e)
        {
            if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;
            // hit deadlock;
backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdrc, &m_hstmtNewOrder) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_STMT, m_hdrc,
&m_hstmtNewOrderNoDuplicates) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderCols1) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderCols2) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderNoDuplicatesCols1) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderNoDuplicatesCols2) != SQL_SUCCESS
)
        ThrowError(CODOBCERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;
}

```

```

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o.ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX_DL_NEW_ORDER_ITEMS;
j++)
{
    if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
    ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
    ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
    )
}

        ThrowError(CODBCERR::eBindParam);
}

// set the bind offset pointer
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_BindOffset,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the
second result set
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

        //Compose the New Order statement
        _snprintf(m_szNewOrderCommand,
sizeof(m_szNewOrderCommand)/sizeof(m_szNewOrderCommand
d[0]),
                // 0           1           2
012345678901234567890123456789
L"%call
%stpcc_neworder(%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,
%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%?
,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,
,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,
,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? ,%? );
"
        ThrowError(CODBCERR::eBindCol);

```

```

        m_iBeginNewOrderVariablePart = 29 +
wcslen(m_szSPPrefix);           // fixed part + prefix
part

////////////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////////////
// Now initialize New Order that
works on no duplicate (w_id,i_id) pairs
// and returns one result set for
lineitem details.
//
m_hstmt = m_hstmtNewOrderNoDuplicates;

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o.ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX_DL_NEW_ORDER_ITEMS;
j++)
{
    if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);
}

```

```

// set row-wise binding
if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.NewOrder.OL[0]),
SQL_IS_UINTINTEGER) != SQL_SUCCESS
    || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) != SQL_SUCCESS )
{
    ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SHORT,
&m_txn.NewOrder.OL[0].ol_i_stock, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    // associate the column bindings for the
second result set
    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
{
        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE,
&m_txn.NewOrder.w_tax, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE,
&m_txn.NewOrder.d_tax, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
SQL_C_LONG,
&m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR,
&m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE,
&m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR,
&m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP,
&m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
    }
}

```

```

|| SQLBindCol(m_hstmt, ++i,
&m_no_commit_flag, 0, NULL) != SQL_SUCCESS
)
ThrowError(CODBCERR::eBindCol);

//Compose the New Order statement
_snprintf(m_szNewOrderNoDuplicatesCommand,
sizeof(m_szNewOrderNoDuplicatesCommand)/sizeof(m_szNewOrderNoDuplicatesCommand[0]),
L"{call
%tpcc_neworder_new(?,?,?,?,?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,?)",
m_szSPPrefix);

_m_iBeginNewOrderNoDuplicatesVariablePart =
33 + wcslen(m_szSPPrefix); // fixed part + prefix
part
}

//
// Returns true if there are duplicate
//(warehouse_id, item_id)
// lineitem pairs in New Order input
parameters.
//
bool CTPCC_ODBC::DuplicatesInNewOrder()
{
    int i, j;

    for (i = 0; i < m_txn.NewOrder.o.ol_cnt;
++i)
    {
        for (j = i+1; j <
m_txn.NewOrder.o.ol_cnt; ++j)
        {
            if
(m_txn.NewOrder.OL[i].ol_i_id ==
m_txn.NewOrder.OL[j].ol_i_id)
            {
                return true;
            }
        }
    }
    return false;
}

void CTPCC_ODBC::NewOrder()
{
    if (_m_bCallNoDuplicatesNewOrder)
    {
        if (DuplicatesInNewOrder())
        {
            NewOrderDuplicates();
        }
        else
        {
            NewOrderNoDuplicates();
        }
    }
}

```

```

else
{
    NewOrderDuplicates();
}

void CTPCC_ODBC::NewOrderDuplicates()
{
    int
i;
RETCODE
int
iTryCount = 0;
rc;
0           1           2
012345678901234567890123456789
wchar_t
szSqlTemplate[iMAX_SP_NAME_LEN];
// L"{call
tpcc_neworder(?,?,?,?,?,?
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?,?",
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?",
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?",?
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?,?,?)";
m_hstmt = m_hstmtNewOrder;
// associate the parameter and column
bindings for this transaction
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
{
    ThrowError(CODBCERR::eSetStmtAttr);

    // clip statement buffer based on number of
parameters
    // fixed part is 29 chars and variable part
is 6 chars per line item
    wcscpy(szSqlTemplate, m_szNewOrderCommand);
    i = _m_iBeginNewOrderVariablePart +
m_txn.NewOrder.o.ol_cnt*6;
    wcscpy( &szSqlTemplate[i], L")" );
    // check whether any order lines are for a
remote warehouse
    m_txn.NewOrder.o.all_local = 1;
    for (i = 0; i < m_txn.NewOrder.o.ol_cnt;
i++)
    {
        if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
        {
}
}
}
}

```

```

        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                                break;
    }

    while (TRUE)
    {
        try
        {
            m_BindOffset = 0;
            rc =
SQLExecDirectW(m_hstmt, szSqlTemplate, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

                                // Get order line
results

            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
i < m_txn.NewOrder.o.ol_cnt; i++)
            {
                // set the
bind offset value...
m_BindOffset

= i * sizeof(m_txn.NewOrder.OL[0]);
                if (
SQLFetch(m_hstmt) == SQL_ERROR)

                    ThrowError(CODBCERR::eFetch);

                                // move to
the next resultset
                if (
SQLMoreResults(m_hstmt) == SQL_ERROR )

                    ThrowError(CODBCERR::eMoreResults);

m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
            }

                                // associate the column
bindings for the second result set
            if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

                ThrowError(CODBCERR::eSetStmtAttr);

                if ( SQLFetch(m_hstmt)
== SQL_ERROR )

                    ThrowError(CODBCERR::eFetch);

SQLFreeStmt(m_hstmt,
SQL_CLOSE);

```

```

        ThrowError(CODBCERR::eExecDirect);

        // configure block
cursor
        if
(SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OI_NEW_ORDER_ITEMS, 0) !=

SQL_SUCCESS)

        ThrowError(CODBCERR::eSetStmtAttr);

        // Get order line
results
        if ( SQLFetch(m_hstmt)

== SQL_ERROR)

        ThrowError(CODBCERR::eFetch);

        m_txn.NewOrder.total_amount = 0;
        for ( i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)
        {

            m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
        }

        // associate the column
bindings for the second result set
        if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=

SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        // move to the next
resultset
        if (
SQLMoreResults(m_hstmt) == SQL_ERROR )

        ThrowError(CODBCERR::eMoreResults);

        if ( (rc =
SQLFetch(m_hstmt)) == SQL_ERROR)

        ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

        // Check Fetch return
code for no rows returned.      // It means customer id
or warehouse id were invalid.
        if ( (rc == SQL_NO_DATA)

```

```

                throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_INVALID_NEW_ORDER_
PARAM);

                if (m_no_commit_flag ==
1)

                {

                    m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

                    m_txn.NewOrder.exec_status_code = eOK;
                }
                else

                    m_txn.NewOrder.exec_status_code =
eInvalidItem;

                break;
            }
            catch ( CODBCERR *e )
            {
                if ( (!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                    throw;

                // hit deadlock;
backoff for increasingly longer period
                delete e;
                Sleep(10 * iTryCount);
            }
        }

        if (iTryCount)
        throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
    }

void CTPCC_ODBC::InitPaymentParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtPayment) != SQL_SUCCESS )

        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtPayment;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
&m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_C_CHAR, SQL_CHAR, sizeof(m_txn.Payment.c_last),
&m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindParam);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.Payment.c_id, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_1,
sizeof(m_txn.Payment.w_street_1), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_2,
sizeof(m_txn.Payment.w_street_2), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_city,
sizeof(m_txn.Payment.w_city), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_state,
sizeof(m_txn.Payment.w_state), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_zip,
sizeof(m_txn.Payment.w_zip), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_1,
sizeof(m_txn.Payment.d_street_1), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_2,
sizeof(m_txn.Payment.d_street_2), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_city,
sizeof(m_txn.Payment.d_city), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_state,
sizeof(m_txn.Payment.d_state), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_zip,

```

```

        sizeof(m_txn.Payment.d_zip), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_first,
sizeof(m_txn.Payment.c_first), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_middle,
sizeof(m_txn.Payment.c_middle), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_1,
sizeof(m_txn.Payment.c_street_1), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_2,
sizeof(m_txn.Payment.c_street_2), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_city,
sizeof(m_txn.Payment.c_city), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_state,
sizeof(m_txn.Payment.c_state), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_zip,
sizeof(m_txn.Payment.c_zip), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_phone,
sizeof(m_txn.Payment.c_phone), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_credit,
sizeof(m_txn.Payment.c_credit), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_credit_lim, 0, NULL)
!= SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_discount, 0,
NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_balance,
0, NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_data,
sizeof(m_txn.Payment.c_data), NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

        //Compose Payment statement
        _snprintf(m_szPaymentCommand,
sizeof(m_szPaymentCommand)/sizeof(m_szPaymentCommand[0]),
L"(call %stpc_payment
(?,?,?,?,?,?))", m_szSPPrefix);

```

```

    }

void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount = 0;

    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szPaymentCommand, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            if (m_txn.Payment.c_id == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code = eOK;
        }
        break;
    }
    catch (CODBCERR *e)
    {
        if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

//      if (iTryCount)
//          throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{

```

```

    if (SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtOrderStatus;

    if (SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
    ThrowError(CODBCERR::eSetStmtAttr);

    int i = 0;
    if (SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);

    // configure block cursor
    if (SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) != SQL_SUCCESS
|| SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if (SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_supply_w_id,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_i_id, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.OL[0].ol_quantity,
0, NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.OL[0].ol_delivery_d, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_first,
sizeof(m_txn.OrderStatus.c_first), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_middle,
sizeof(m_txn.OrderStatus.c_middle), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.o_carrier_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.c_balance, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.o_id, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    //Compose Order Status statement
    _snprintf(m_szOrderStatusCommand,
sizeof(m_szOrderStatusCommand)/sizeof(m_szOrderStatus
Command[0]),
    L"(call %stpcc_orderstatus
(?, ?, ?, ?))", m_szSPPrefix);
}

void CTPCC_ODBC::OrderStatus()
{
    int             iTryCount = 0;
    RETCODE         rc;

```

```

    m_hstmt = m_hstmtOrderStatus;

    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

            cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )

                ThrowError(CODBCERR::eSetStmtAttr);

            rc =
SQLExecDirectW(m_hstmt, m_szOrderStatusCommand,
SQL_NTS);
                if (rc != SQL_SUCCESS_WITH_INFO)
                    ThrowError(CODBCERR::eExecDirect);

            cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OI_ORDER_STATUS_ITEMS, 0) != SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

            rc = SQLFetchScroll(
m_hstmt, SQL_FETCH_NEXT, 0 );
                if ( !(rc == SQL_SUCCESS) || ((rc == SQL_SUCCESS_WITH_INFO) &&
(m_RowsFetched != 0)) )
                    if ( (rc != SQL_SUCCESS) )
                        ThrowError(CODBCERR::eFetchScroll);

                m_txn.OrderStatus.o_ol_cnt =
(short)m_RowsFetched;
                if
(m_txn.OrderStatus.o_ol_cnt != 0)
                    if (
SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) != SQL_SUCCESS )

```

```

            ThrowError(CODBCERR::eSetStmtAttr);

        // SQLMoreResults(m_hstmt) == SQL_ERROR )
            if ( (rc = SQLMoreResults(m_hstmt)) != SQL_SUCCESS )
            {
                ThrowError(CODBCERR::eMoreResults);
            }

        // SQLFetch(m_hstmt) == SQL_ERROR )
            if ( (rc = SQLFetch(m_hstmt)) != SQL_SUCCESS )
            {
                ThrowError(CODBCERR::eFetch);
            }

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);
            if
(m_txn.OrderStatus.o_ol_cnt == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO SUCH ORDER );
            else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.OrderStatus.exec_status_code = eOK;
                break;
        }
        catch (CODBCERR *e)
        {
            if ( (!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;
            // hit deadlock;
            backoff for increasingly longer period
                delete e;
                Sleep(10 * iTryCount);
        }
        // if (iTryCount)
        //     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
    }

    void CTPCC_ODBC::InitDeliveryParams()
    {
        if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS )

```

```

ThrowErrorHandler(CODBCERR::eAllocHandle);

m_hstmt = m_hstmtDelivery;

int i = 0;
if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
)
    ThrowErrorHandler(CODBCERR::eBindParam);

for (i=0;i<10;i++)
{
    if ( SQLBindCol(m_hstmt,
(UWORD)(i+1), SQL_C_SLONG, &m_txn.Delivery.o_id[i],
0, NULL) != SQL_SUCCESS )

        ThrowErrorHandler(CODBCERR::eBindCol);
}

//Compose Delivery statement
_snwprintf(m_szDeliveryCommand,
sizeof(m_szDeliveryCommand)/sizeof(m_szDeliveryCommand
d[0]),
L"{call %stpcc_delivery (?,?)",
m_szSPPrefix);
}

void CTPCC_ODBC::Delivery()
{
    RETCODE          rc;
    int              iTryCount = 0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szDeliveryCommand,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowErrorHandler(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR )

                ThrowErrorHandler(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);
            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
    }
}

```

```

        catch (CODBCERR *e)
        {
            if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
    throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

```

tpcc_odbc.h

```

/*      FILE:           TPCC_ODBC.H
*                                         Microsoft
TPC-C Kit Ver. 4.20.000
*                                         Microsoft, 1999
*                                         Copyright
*                                         All Rights Reserved
*                                         Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Header file for TPC-C txn class
implementation.
*
* Change history:
*                 4.20.000 - updated rev number to
match kit
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

#define iMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        // error from SQLAllocConnect
        eAllocHandle,
        // error from SQLAllocHandle
    }
}

```

```

eConnOption,
// error from SQLSetConnectOption
eConnect,
// error from SQLConnect
eAllocStmt,
// error from SQLAllocStmt
eExecDirect,
// error from SQLExecDirect
eBindParam,
// error from SQLBindParameter
eBindCol,
// error from SQLBindCol
eFetch,
// error from SQLFetch
eFetchScroll,
// error from SQLFetchScroll
eMoreResults,
// error from SQLMoreResults
ePrepare,
// error from SQLPrepare
eExecute,
// error from SQLExecute
eSetEnvAttr,
// error from SQLSetEnvAttr
eSetStmtAttr
// error from SQLSetStmtAttr
};

CODBCERR(void)
{
    m_eAction = eNone;
    m_NativeError = 0;
    m_bDeadLock = FALSE;
    m_odbcerrstr = NULL;
};

~CODBCERR()
{
    if (m_odbcerrstr != NULL)
        delete [];
    m_odbcerrstr = NULL;
}

ACTION    m_eAction;
int      m_NativeError;
BOOL    m_bDeadLock;
char   *m_odbcerrstr;

int      ErrorType();
{return ERR_TYPE_ODBC;};
char*   ErrorTypeStr() { return
"ODBC"; }
int      ErrorNum();
{return m_NativeError;};
char*   ErrorText() { return
m_odbcerrstr; }
int      ErrorAction();
{return (int)m_eAction; }

class CTPCC_ODBC_ERR : public CBaseErr
{
}

```

```

{
    public:
        enum TPCC_ODBC_ERRS
        {
            ERR_WRONG_SP_VERSION =
1,           // "Wrong version of stored procs on
database server"
            ERR_INVALID_CUST,
            // "Invalid Customer id,name."
            ERR_NO SUCH_ORDER,
            // "No orders found for
customer."
            ERR_RETRYED_TRANS,
            // "Retries before transaction
succeeded."
            ERR_INVALID_NEW_ORDER_PARAM // "New Order
parameter invalid."
        };

        CTPCC_ODBC_ERR( int iErr ) {
            m_errno = iErr; m_iTryCount = 0; };

            CTPCC_ODBC_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

            int             m_errno;
            int             m_iTryCount;
            int             ErrorType();
{ return ERR_TYPE_TPCC_ODBC; };
            char*          ErrorTypeStr() { return
"TPCC ODBC"; };
            int             ErrorNum()
{ return m_errno; };

            char*          ErrorText();
};

class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
    private:
        // declare variables and private
functions here...
        BOOL            m_bDeadlock;
        // transaction was selected as
deadlock victim
        int             m_MaxRetries;
        // retry
count on deadlock

        SQLHENV         m_henv;
        // ODBC environment
handle
        SQLHDBC         m_hdbe;
        SQLHSTMT        m_hstmt;
        // the current hstmt

        SQLHSTMT        m_hstmtNewOrder;
        SQLHSTMT        m_hstmtNewOrderNoDuplicates; // NewOrder
with one result set for lineitem details

```

```

SQLHSTMT        m_hstmtPayment;
SQLHSTMT        m_hstmtDelivery;
SQLHSTMT        m_hstmtOrderStatus;
SQLHSTMT        m_hstmtStockLevel;

SQLHDESC        m_descNewOrderCols1;
SQLHDESC        m_descNewOrderCols2;
SQLHDESC        m_descNewOrderNoDuplicatesCols1; // NewOrder with one result set for lineitem details
SQLHDESC        m_descNewOrderNoDuplicatesCols2; // NewOrder with one result set for lineitem details
SQLHDESC        m_descOrderStatusCols1;
SQLHDESC        m_descOrderStatusCols2;

wchar_t          m_szSPPrefix[32]; // stored procedures
prefix

wchar_t          m_szNewOrderCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szNewOrderNoDuplicatesCommand[iMAX_SP_NAME_LEN];
int             m_iBeginNewOrderVariablePart; // begining
of the variable part in NewOrder statement
int             m_iBeginNewOrderNoDuplicatesVariablePart;
// begining of the variable part in
NewOrder statement
wchar_t          m_szPaymentCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szDeliveryCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szOrderStatusCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szStockLevelCommand[iMAX_SP_NAME_LEN];

// new-order specific fields
SQLINTEGER       m_BindOffset;
SQLINTEGER       m_BindCount;
m_RowsFetched;
int             m_no_commit_flag;

// tpcc_neworder_new flag
BOOL            m_bCallNoDuplicatesNewOrder;

//void ThrowError(
CDBCERR::ACTION eAction );
void ThrowError( RETCODE eAction
);

void InitNewOrderParams();
void InitPaymentParams();
void InitDeliveryParams();
void InitStockLevelParams();
void InitOrderStatusParams();

```

```

union
{
    NEW_ORDER_DATA
NewOrder;
    PAYMENT_DATA
Payment;
    DELIVERY_DATA
Delivery;
    STOCK_LEVEL_DATA
StockLevel;
    ORDER_STATUS_DATA
OrderStatus;
};

m_txn;

bool DuplicatesInNewOrder();
void NewOrderDuplicates();
void NewOrderNoDuplicates();

public:
    CTPCC_ODBC( LPCSTR
szServer, LPCSTR szUser, LPCSTR szPassword,
LPCSTR szHost, LPCSTR szDatabase,
LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );
~CTPCC_ODBC(void);

    inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
    inline PPAYMENT_DATA
BuffAddr_Payment() { return
&m_txn.Payment; };
    inline PDELIVERY_DATA
BuffAddr_Delivery() { return
&m_txn.Delivery; };
    inline PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
    inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

    void NewOrder();
    void Payment();
    void Delivery();
    void StockLevel();
    void OrderStatus();
};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
(
    LPCSTR szServer, LPCSTR szUser,
    LPCSTR szHost, LPCSTR szDatabase,
    LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );

```

```
typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCWSTR, BOOL);
```

tpcc_oledb.cpp

```
/* FILE: TPCC_OLEDB.CPP
 * Microsoft
TPC-C Kit Ver. 4.42.000
 * Copyright
Microsoft, 2004
 * Written by
Sergey Vasilevskiy
 * All Rights Reserved
 *
 *
PURPOSE: Implements OLEDB calls for TPC-C
txns.
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 */
#include <windows.h>
#include <stdio.h>
#include <assert.h>
#include <stddef.h>

#define DBINITCONSTANTS
#include <oledb.h>
//#include <sqloledb.h> // Use MDAC
#include <sqlncli.h> // Use SNAC
#include <oledberr.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_oledb.h"

#ifndef SQL_MAX_MESSAGE_LENGTH
#define SQL_MAX_MESSAGE_LENGTH 512
#endif

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const int iMaxRetries = 10; // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";
```

```
// this needs to be the same as the max length of
machine/database/user/password in Benchcraft
(engstut.h)
const static int iMaxNameLen = 32;

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            break;

        case DLL_PROCESS_DETACH:
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

/* FUNCTION: CTPCC_OLEDB_ERR::ErrorText
 */
char* CTPCC_OLEDB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { 0, "" }
    };
    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
}
```

```
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_OLEDB* CTPCC_OLEDB_new(
    LPCSTR szServer, // name of
SQL server
    LPCSTR szUser, // user name for login
    LPCSTR szPassword, // password
for login
    LPCSTR szHost, // not used
    LPCSTR szDatabase, // name of
database to use
    LPCWSTR szSPPrefix ) // prefix to append to the stored procedure names
{
    return new CTPCC_OLEDB( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix );
}

CTPCC_OLEDB::CTPCC_OLEDB (
    LPCSTR szServer, // name of SQL server
    LPCSTR szUser, // user name for login
    LPCSTR szPassword, // password for login
    LPCSTR szHost, // not used
    LPCSTR szDatabase, // name of database to use
    LPCWSTR szSPPrefix // prefix to append to the stored procedure
names
)
: m_pIMalloc(NULL)
{
    int iRc;
    int i;
    i;
    HRESULT hr;
    IDBInitialize* pIDBInitialize = NULL; // data source interface
    IDBProperties* pIDBProperties = NULL;
    ICommandText* pICommandText;
    // SQL command without parameters
    wchar_t szwServer[iMaxNameLen];
    Unicode string used to convert to BSTR
}
```

```

wchar_t
szwDatabase[iMaxNameLen];      // Unicode
string used to convert to BSTR
wchar_t
szwUser[iMaxNameLen];          // Unicode
string used to convert to BSTR
wchar_t
szwPassword[iMaxNameLen];      // Unicode
string used to convert to BSTR

// Copy stored procedures prefix
wcscpy(m_szSPPrefix, szSPPrefix,
sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));

// Convert single byte ANSI strings to
Unicode (for later conversion to BSTR)
iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szServer, (int)strlen(szServer)+1,
szwServer, iMaxNameLen);
iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szDatabase,
(int)strlen(szDatabase)+1, szwDatabase, iMaxNameLen);
iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szUser, (int)strlen(szUser)+1,
szwUser, iMaxNameLen);
iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szPassword,
(int)strlen(szPassword)+1, szwPassword, iMaxNameLen);

// Initialize COM library to be able to use
OLE-DB interfaces
CoInitialize(NULL);

// Initialization - create SQLOLEDB
component
//hr = CoCreateInstance(CLSID_SQLOLEDB, //GUID of SQLOLEDB component
//                      // Compile for SNAC
//                      hr = CoCreateInstance(CLSID_SQLNCLI, //GUID of SQLNCLI component
//                                         NULL,
//                                         // not defining an aggregate
component, so NULL
                                         CLSCTX_INPROC_SERVER, // run the component in our process
                                         IID_IDBInitialize,
                                         (void **) &pIDBInitialize);
/*
Initialize the property values needed
to establish the connection.
*/
for(i = 0; i < 4; i++)
    VariantInit(&m_InitProperties[i].vValue);
//Server name.
m_InitProperties[0].dwPropertyID =
DBPROP_INIT_DATASOURCE;
m_InitProperties[0].vValue.vt      = VT_BSTR;
m_InitProperties[0].vValue.bstrVal=
SysAllocString(szwServer);
m_InitProperties[0].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[0].colid        = DB_NULLID;
//Database.

```

```

m_InitProperties[1].dwPropertyID =
DBPROP_INIT_CATALOG;
m_InitProperties[1].vValue.vt      = VT_BSTR;
m_InitProperties[1].vValue.bstrVal=
SysAllocString(szwDatabase);
m_InitProperties[1].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[1].colid        = DB_NULLID;
//Username (login).
m_InitProperties[2].dwPropertyID =
DBPROP_AUTH_USERID;
m_InitProperties[2].vValue.vt      = VT_BSTR;
m_InitProperties[2].vValue.bstrVal=
SysAllocString(szwUser);
m_InitProperties[2].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[2].colid        = DB_NULLID;
//Password.
m_InitProperties[3].dwPropertyID =
DBPROP_AUTH_PASSWORD;
m_InitProperties[3].vValue.vt      = VT_BSTR;
m_InitProperties[3].vValue.bstrVal=
SysAllocString(szwPassword);
m_InitProperties[3].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[3].colid        = DB_NULLID;
/*
Construct the DBPROPSET
structure(m_rgInitPropSet). The
DBPROPSET structure is used to pass an array of
DBPROP
structures (m_InitProperties) to the
SetProperties method.
*/
m_rgInitPropSet.guidPropertySet =
DBPROPSET_DBINIT;
m_rgInitPropSet.cProperties     = 4;
m_rgInitPropSet.rgProperties   =
m_InitProperties;
//Set initialization properties.
if (FAILED(hr = pIDBInitialize-
>QueryInterface(IID_IDBProperties,
                                         (void **)&pIDBProperties)))
{
    ThrowError(pIDBInitialize,
COLEDBERR::eQueryInterface, "CTPCC_OLEDB()");
}

hr = pIDBProperties->SetProperties(1,
&m_rgInitPropSet);
pIDBProperties->Release();
//Now establish the connection to the data
source.
hr = pIDBInitialize->Initialize();

// Free BSTR property strings
for(i = 0; i < 4; i++)
{

```

```

SysFreeString(m_InitProperties[i].vValue.bstrVal);
}

hr = pIDBInitialize-
>QueryInterface(IID_IDBCreateSession, (void
**) &m_pIDBCreateSession);

// Releasing this has no effect on the SQL
Server connection
// of the data source object because of the
reference maintained by
// m_pIDBCreateSession.
pIDBInitialize->Release();
pIDBInitialize = NULL;

hr = m_pIDBCreateSession-
>CreateSession(NULL, IID_IDBCreateCommand, (IUnknown
**) &m_pIDBCreateCommand);
if (FAILED(hr))
{
    ThrowError(m_pIDBCreateSession,
COLEDBERR::eCreateSession, "CTPCC_OLEDB()");
}

hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**) &pICommandText);
if (FAILED(hr))
{
    ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CTPCC_OLEDB()");
}

hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"set nocount on set
XACT_ABORT ON");
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CTPCC_OLEDB()");
}

hr = pICommandText->Execute(NULL, IID_NULL,
NULL, NULL, NULL);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eExecute, "CTPCC_OLEDB()");
}

pICommandText->Release();

// verify that version of stored procs on
server is correct
CheckSPVersion();

// Get IMalloc interface
hr = CoGetMalloc(1, (LPMALLOC
*) &m_pIMalloc);

```

```

// Bind parameters for each of the
transactions
    InitNewOrderParams();
    InitPaymentParams();
    InitOrderStatusParams();
    InitDeliveryParams();
    InitStockLevelParams();
}

CTPCC_OLEDB::~CTPCC_OLEDB( void )
{
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc->Release();
    }
    m_pIPaymentCommand->Release();
    m_pIDBCreateCommand->Release();
    m_pIDBCreateSession->Release();

    CoUninitialize(); // uninitialized COM
library
}

/*
 *      Check stored procedures version on the
server.
*/
void CTPCC_OLEDB::CheckSPVersion()
{
    HRESULT hr;
    char db_sp_version[10];
    ICommandText* pICommandText;
    IAccessor* piAccessor;
    IRowset* pRowset;
    const ULONG nOutputParams = 1;
    // output 1st result set columns
    HACCESSOR hTpccVersionOutputAccessor;
    // Structure to bind in accessor
    DBBINDING acOutputDBBind[nOutputParams];
    DBBINDSTATUS acOutputDBBindStatus[nOutputParams];
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG cRowsObtained;
    HROW rghRow;
    //returned row handles
    HROW* prghRow = &rghRow;

    hr = m_pIDBCreateCommand->CreateCommand(NULL, IID_ICommandText, (IUnknown**)&pICommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CheckSPVersion()");
    }

    hr = pICommandText->SetCommandText(DBGUID_SQL, L"call tpcc_version");
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CheckSPVersion()");
    }

    hr = pICommandText->QueryInterface(IID_IAccessor, (void **)&piAccessor);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eQueryInterface, "CheckSPVersion()");
    }

    // Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBind[0],
nOutputParams, eOutputColumn);

    // Binding for a rowset
    SetBinding(&acOutputDBBind[0], 0,
sizeof(db_sp_version), DBTYPE_STR);

    hr = piAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA,
        nOutputParams,
        acOutputDBBind,
        sizeof(db_sp_version),
        &hTpccVersionOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "CheckSPVersion()");
    }

    hr = pICommandText->Execute(NULL,
        IID_IRowset, NULL, NULL, (IUnknown **)&pRowset);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eExecute, "CheckSPVersion()");
    }

    // Fetch the result row handle(s)
    hr = pRowset->GetNextRows(DB_NULL_HCHAPTER,
        0, cRows, &cRowsObtained, &prghRow);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eGetNextRows, "CheckSPVersion()");
    }

    // Fetch the actual row data by handle
    hr = pRowset->GetData(rghRow,
        hTpccVersionOutputAccessor, &db_sp_version);
    if (FAILED(hr))
    {
        ThrowError(pICommandText,
COLEDBERR::eGetData, "CheckSPVersion()");
    }

    // Release row(s)
    hr = pRowset->Release();
    pICommandText->Release();

    // Check the retrieved version
    if (strcmp(db_sp_version,sVersion))
        throw new
CTPCC_OLEDB_ERR(
CTPCC_OLEDB_ERR::ERR_WRONG_SP_VERSION );
}

void CTPCC_OLEDB::ThrowError( IUnknown* pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR szLocation)
{
    HRESULT hr;
    //char szState[6];
    char szMsg[SQL_MAX_MESSAGE_LENGTH];
    char szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    COLEDBERR *pOLEDBErr;
    // not allocated until needed (maybe never)
    int iLen;
    // Interfaces
    IErrorInfo* pIErrInfoAll
= NULL;
    IErrorInfo* pIErrInfoRecord
= NULL;
    IErrorRecords* pIErrRecords
= NULL;
    ISupportErrorInfo* pISuppErrorInfo
= NULL;
    ISQLServerErrorInfo* pISQLServerErrorInfo
= NULL;
    ISQLServerErrorInfo* pISQLServerErrorInfo
= NULL;
    ISQLErrorInfo* pISQLErrorInfo
= NULL;

    // Information used when cannot get custom
error object
    ERRORINFO
    BasicErrorInfo;
    BSTR
    bstrDescription;
    // Number of error records.
    ULONG nRecs;
    ULONG nRec;

    // SQL Server error information from
ISQLServerErrorInfo.
    SSERRORINFO* pSSSErrorInfo =
NULL;
    OLECHAR* pSSSErrorStrings =
NULL;
    assert(pObjectWithError != NULL);
}

```

```

pOLEDBErr = new COLEDBERR(szLocation);

pOLEDBErr->m_NativeError = 0;
pOLEDBErr->m_eAction = eAction;
pOLEDBErr->m_bDeadLock = FALSE;

szTmp[0] = 0;

// Only ask for error information if the
interface supports it.
// Note: SQLOLEDB provider supports error
interface, so this check is
// for good style only.
hr = pObjectWithError-
>QueryInterface(IID_ISupportErrorInfo, (void**)&pISupportErrorInfo);
if (FAILED(hr))
{
    _snprintf(szMsg, sizeof(szMsg),
"SupportErrorInfo interface not supported (hr=0x%X)", hr);
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
    throw POLEDBErr;
}
/*if (FAILED(pISupportErrorInfo-
>InterfaceSupportsErrorInfo(IID_InterfaceWithError)))
{
    _snprintf(szMsg, sizeof(szMsg),
"InterfaceWithError interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
    return;
}*/
// Do not test the return of GetErrorInfo.
It can succeed and return
// a NULL pointer in pIErrInfoAll. Simply
test the pointer.
GetErrorInfo(0, &pIErrInfoAll);

if (pIErrInfoAll != NULL)
{
    // Test to see if it's a valid
OLE DB IErrorInfo interface
    // exposing a list of records.
    if (SUCCEEDED(pIErrInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)&pIErrRecords)))
    {
        pIErrRecords-
>GetRecordCount(&nRecs);

        // Within each record,
retrieve information from each
        // of the defined
interfaces.

```

```

for (nRec = 0; nRec <
nRecs; nRec++)
{
    // Request
the generic SQL error interface.

pIErrRecords->GetCustomErrorObject(nRec,
IID_ISQLErrorInfo, // generic SQL error
interface
(IUnknown**)&pISQLErrorInfo);

if
(pISQLErrorInfo != NULL)
{
    // Request SQL Server-specific error interface, not the
generic SQL error interface.

pISQLErrorInfo->QueryInterface(
IID_ISQLServerErrorInfo, // SQL Server
error interface

(void**)&pISQLServerErrorInfo);
}

// Test to
ensure the reference is valid, then
// get error
information from ISQLServerErrorInfo.
if
(pISQLServerErrorInfo != NULL)
{
    pISQLServerErrorInfo-
>GetErrorInfo(&pSSErrorInfo, &pSSErrorStrings);
}

// ISQLServerErrorInfo::GetErrorInfo succeeds
// even when it has nothing to return. Test the
// pointers before using.
if
(pSSErrorInfo)
{
    // First, add the error message.

    // Convert Unicode error string to ANSI.
WideCharToMultiByte(CP_THREAD_ACP, 0,
>pwszProcedure, -1,
&szMsg[iLen],
sizeof(szMsg) - iLen,
NULL, NULL);

    // Check if have space to add the
line number.
    // Assume the line number takes
no more than 3 digits.

    if ((strlen(szMsg) + 4) <
sizeof(szMsg))
    {

```

```

        _snprintf(&szMsg[strlen(szMsg)],
        sizeof(szMsg),
                ":%d",
                pSSSErrorInfo->wLineNumber);
        }

        // quit if there isn't enough
        room to concatenate error text

        if ( (strlen(szMsg) + 2) >
        (sizeof(szTmp) - strlen(szTmp)) )
        {
            break;

            // concatenate the error record
            to the overall error message

            strcat( szTmp, szMsg );

            // copy the overall error string
            to the exception

            POLEDBErr->m_OLEDBErrStr = new
            char[strlen(szTmp)+1];
            strcpy(pOLEDBErr->m_OLEDBErrStr,
            szTmp);
        }

        // Third, capture the (first) database
        error

        if (pOLEDBErr->m_NativeError == 0 &&
        pSSSErrorInfo->lNative != 0)
        {
            pOLEDBErr->m_NativeError =
            pSSSErrorInfo->lNative;

            // Check for deadlock error code
            and set the deadlock flag

            if (pSSSErrorInfo->lNative ==
            1205)
            {
                pOLEDBErr->m_bDeadLock
                = TRUE;
            }
        }
    }
}

```

```

        }

        // IMalloc::Free needed to release
        references

        // on returned values.

        if (m_pIMalloc != NULL)
        {
            m_pIMalloc-
            >Free(pSSSErrorStrings);

            m_pIMalloc->Free(pSSSErrorInfo);
        }
    }

    pISQLServerErrorInfo->Release();
}
else
{
    // Custom error object is not supported.
    // Use general OLE-DB error interface.

    // Get the numeric error code

    pIErrorRecords->GetBasicErrorInfo(nRec,
    &BasicErrorInfo);

    if
    (pOLEDBErr->m_NativeError == 0)
    {
        // Get the failed call HRESULT code, which
        is not really the native error

        pOLEDBErr->m_NativeError =
        BasicErrorInfo.hrError;
    }

    Try to get the string description of the error.

    pIErrorRecords->GetErrorInfo(nRec,
    LOCALE_USER_DEFAULT,
    (IErrorInfo**)&pIErrorInfoRecord);

    if
    (pIErrorInfoRecord)
    {
        pIErrorInfoRecord-
        >GetDescription(&bstrDescription);
    }
}

```

```

// Convert Unicode error string to ANSI.

WideCharToMultiByte(CP_THREAD_ACP, 0,
                    bstrDescription, -1,
                    szMsg, sizeof(szMsg),
                    NULL, NULL);

pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
strcpy(pOLEDBErr->m_OLEDBErrStr, szMsg);

}

}

// for()

}

// if

(SUCCEEDED(pIErrorInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)&pIErrorRecords)))
{
    // No IErrorRecords
    // interface supported. Use default IErrorInfo.
    // Note: SQLOLEDB
    // supports IErrorRecords, so this check is for good
    // style only.

    _snprintf(szMsg,
    sizeof(szMsg), "IErrorRecords interface not
    supported");

    pOLEDBErr-
    >m_OLEDBErrStr = new char[strlen(szMsg)+1];
    strcpy(pOLEDBErr-
    >m_OLEDBErrStr, szMsg);
}

pIErrorInfoAll->Release();

}

// if (pIErrorInfoAll != NULL)

{
    // No IErrorInfo interface
    // supported.

    // Note: SQLOLEDB supports
    // IErrorInfo, so this check is for good style only.

    _snprintf(szMsg, sizeof(szMsg),
    "IErrorInfo interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
    char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
    szMsg);
}

throw pOLEDBErr;

/*
*/

```

```

*      Create a new command object from the SQL
text passed in.
*/
void CTPCC_OLEDB::CreateCommand(wchar_t*
szSQLCommand,                                // I: SQL
query for the command

    ICommandText**  

ppICommandText      // O: returned command object
)
{
    HRESULT hr;
    // Create a new command object
    hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**)ppICommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand,
"CTPCC_OLEDB::CreateCommand");
    }

    // Set command text
    hr = (*ppICommandText)->SetCommandText(DBGUID_SQL, szSQLCommand);
    if (FAILED(hr))
    {
        ThrowError(*ppICommandText,
COLEDBERR::eSetCommandText,
"CTPCC_OLEDB::CreateCommand");
    }

    // Prepare the command
    PrepareCommand(*ppICommandText);
}

/*
 *      QueryInterface and Prepare in one function
for simplicity.
*      DEFERRED PREPARE property is set to off to
prepare immediately.
*/
void CTPCC_OLEDB::PrepareCommand(ICommandText*
pICommandText)
{
    HRESULT hr;
    ICommandPrepare* pICommandPrepare;
    ICommandProperties* pICommandProperties;
    DBPROPSET
    rowSetPropSet;
    DBPROP
    rowSetProp;

    // Set the deferred prepare property to
false.
    rowSetProp.dwPropertyID =
SSPROP_DEFERPREPARE;
    memset(&rowSetProp.vValue, 0,
sizeof(rowSetProp.vValue));
}

```

```

rowSetProp.dwOptions =
DBPROPOPTIONS_REQUIRED;
rowSetProp.colid = DB_NULLID;

rowSetPropSet.cProperties = 1;
rowSetPropSet.guidPropertySet =
DBPROPSET_SQLSERVERROWSET;
rowSetPropSet.rgProperties = &rowSetProp;

// Query interface for setting properties
hr = pICommandText->QueryInterface(IID_ICommandProperties, (void
**)&pICommandProperties);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Set the property set
hr = pICommandProperties->SetProperties(1,
&rowSetPropSet);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Get interface for preparing commands
hr = pICommandText->QueryInterface(IID_ICommandPrepare, (void
**)&pICommandPrepare);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Prepare Payment command
hr = pICommandPrepare->Prepare(0xFFFFFFFF);
if (FAILED(hr))
{
    ThrowError(pICommandPrepare,
COLEDBERR::ePrepare, "CTPCC_OLEDB::PrepareCommand");
}

/*
 *      Initialize fields of an array of bindings
structures.
*      Needs to be called before setting
individual parameter/column bindings.
*/
void CTPCC_OLEDB::InitBindings(DBBINDING*
pDBBindings,                                // IO: array of bindings
int iCount,                                    // I: number of
elements in the array

```

```

eBindingType BindingType)      //  

I: what the bindings will be used for
(parameters/columns)
{
    int i;
    for(i = 0; i < iCount; i++)
    {
        pDBBindings[i].iOrdinal = i + 1;
        pDBBindings[i].obLength = 0;
        pDBBindings[i].obStatus = 0;
        pDBBindings[i].pTypeInfo = NULL;
        pDBBindings[i].pObject = NULL;
        pDBBindings[i].pBindExt = NULL;
        pDBBindings[i].dwPart = DBPART_VALUE;

        switch (BindingType)
        {
            case eInputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT;
                break;
            case eOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_OUTPUT;
                break;
            case eInputOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT | DBPARAMIO_OUTPUT;
                break;
            case eOutputColumn:
                pDBBindings[i].eParamIO
= DBPARAMIO_NOTPARAM;
                break;
            default:
                assert(false);      //
this should never happen
        }

        pDBBindings[i].dwMemOwner =
DBMEMOWNER_CLIENTOWNED;
        pDBBindings[i].dwFlags = 0;
        pDBBindings[i].bPrecision = 0;
        pDBBindings[i].bScale = 0;
    }

    /*
     *      Perform binding for one parameter or output
column.
     */
    void CTPCC_OLEDB::SetBinding(DBBINDING* pDBBinding,
// I: binding row structure
size_t obValue,
// I: parameter (column) offset in the user
buffer
size_t cbMaxLen,                            //
I: parameter (column) length

```

```

        DBTYPE wType
    // I: parameter (column) type
    }

    pDBBinding->obValue = (ULONG)obValue;
    pDBBinding->cbMaxLen = (ULONG)cbMaxLen;
    pDBBinding->wType = wType;
}

void CTPCC_OLEDB::InitStockLevelParams()
{
    int i;
    HRESULT hr;
    wchar_t szName[iMAX_SP_NAME_LEN];
    IAccessor* pIAccessor;
    const ULONG nInputParams = 3; // input parameters
    const ULONG nOutputParams = 1; // output 1st result
    set columns
        // Structure to bind in accessor
        DBBINDING acInputDBBinding[nInputParams];
        DBBINDSTATUS acInputDBBindStatus[nInputParams];
        DBBINDING acOutputDBBinding[nOutputParams];
        DBBINDSTATUS acOutputDBBindStatus[nOutputParams];

        // Set command text
        _snwprintf(szName,
        sizeof(szName)/sizeof(szName[0]),
        L"{call
%stpcc_stocklevel (?, ?, ?)}", m_szSPPrefix);

        // Create and Prepare a new command object
        for StockLevel.
        CreateCommand(szName,
        &m_pIStockLevelCommand);

        // Describe the consumer buffer by filling
        in the array
        // of DBBINDING structures. Each binding
        associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
        nInputParams, eInputParameter);

        i = 0;
        // StockLevel parameter 1
        SetBinding(&acInputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, w_id),
        sizeof(m_txn.StockLevel.w_id), DBTYPE_I4);

        // StockLevel parameter 2

```

```

        SetBinding(&acInputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, d_id),
        sizeof(m_txn.StockLevel.d_id), DBTYPE_UI1);

        // StockLevel parameter 3
        SetBinding(&acInputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, threshold),
        sizeof(m_txn.StockLevel.threshold), DBTYPE_I2);

        hr = m_pIStockLevelCommand-
        >QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
            COLEDBERR::eQueryInterface,
            "InitStockLevelParams()");
        }

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_PARAMETERDATA,
            nInputParams,
            acInputDBBinding,
            sizeof(STOCK_LEVEL_DATA),
            &m_hStockLevelInputAccessor,
            acInputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor,
            "InitStockLevelParams()");
        }

        m_StockLevelExecuteParams.cParamSets = 1;
        m_StockLevelExecuteParams.hAccessor =
        m_hStockLevelInputAccessor;
        m_StockLevelExecuteParams.pData =
        &m_txn.StockLevel;

        // Now fill the binding information for
        result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
        nOutputParams, eOutputColumn);

        // Binding for a rowset that may return
        more than one row.
        i = 0;
        // StockLevel output column 1
        SetBinding(&acOutputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, low_stock),
        sizeof(m_txn.StockLevel.low_stock), DBTYPE_I4);

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_OPTIMIZED,
            DBACCESSOR_ROWDATA |
            DBACCESSOR_OPTIMIZED,
            nOutputParams,
            acOutputDBBinding,
            sizeof(STOCK_LEVEL_DATA),
            &m_hStockLevelOutputAccessor,
            acOutputDBBindStatus);
        if (FAILED(hr))
        {

```

```

            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor,
            "InitStockLevelParams()");
        }

        void CTPCC_OLEDB::StockLevel()
        {
            HRESULT hr;
            int iTryCount = 0;
            IRowset* pRowset;
            LONG cRows = 1;
            // number of rows returned in the rowset
            ULONG cRowsObtained;
            HROW rghRow;
            HROW* prghRow = &rgRow;

            while (TRUE)
            {
                try
                {
                    // Execute the prepared
                    command
                    hr =
                    m_pIStockLevelCommand->Execute(NULL, IID_IRowset,
                    &m_StockLevelExecuteParams, NULL,
                    (IUnknown **)&pRowset);
                    if (FAILED(hr))
                    {
                        ThrowError(m_pIStockLevelCommand,
                        COLEDBERR::eExecute, "StockLevel()");
                    }
                }
                // Fetch the result row
                handle(s)
                hr = pRowset-
                >GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
                &cRowsObtained, &prghRow);
                if (FAILED(hr))
                {
                    ThrowError(m_pIStockLevelCommand,
                    COLEDBERR::eGetNextRows, "StockLevel()");
                }
            }
            // Fetch the actual row
            data by handle
            hr = pRowset-
            >GetData(rgRow, m_hStockLevelOutputAccessor,
            &m_txn.StockLevel);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
                COLEDBERR::eGetData, "StockLevel()");
            }
        }

```

```

        // Release row(s)
        hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
        // Release rowset
        hr = pRowset-
>Release();

m_txn.StockLevel.exec_status_code = eOK;

        break;
    }
    catch (COLEDBERR *e)
    {
        if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    if (iTryCount)
//           throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitNewOrderParams()
{
    int
        i, j, iOlCount;
    HRESULT
    hr;
    wchar_t
szName[iMAX_SP_NAME_LEN];
    IAccessor*
    pIAccessor;
    const ULONG
    nInputParams = 5 +
3*MAX_OL_NEW_ORDER_ITEMS;      // input parameters
    const ULONG
    nOutputParams = 5; // output 1st result
set columns
    const ULONG
    nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBinding[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];
    DBBINDING
    acOutputDBBinding2[nOutputParams2];
}

```

```

        DBBINDSTATUS
        acOutputDBBindStatus2[nOutputParams2];

        // Describe the consumer buffer by filling
in the array
        // of DBBINDING structures. Each binding
associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

        i = 0;
        // NewOrder parameter 1
        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, w_id),
sizeof(m_txn.NewOrder.w_id), DBTYPE_I4);

        // NewOrder parameter 2
        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, d_id),
sizeof(m_txn.NewOrder.d_id), DBTYPE_UI1);

        // NewOrder parameter 3
        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, c_id),
sizeof(m_txn.NewOrder.c_id), DBTYPE_I4);

        // NewOrder parameter 4
        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o.ol_cnt),
sizeof(m_txn.NewOrder.o.ol_cnt), DBTYPE_UI1);

        // NewOrder parameter 5
        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o.all_local),
sizeof(m_txn.NewOrder.o.all_local), DBTYPE_UI1);

        for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
{
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_i_id),
sizeof(m_txn.NewOrder.OL[j].ol_i_id), DBTYPE_I4);

    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_supply_w_id),
sizeof(m_txn.NewOrder.OL[j].ol_supply_w_id),
DBTYPE_I4);

    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_quantity),
sizeof(m_txn.NewOrder.OL[j].ol_quantity), DBTYPE_I2);
}

        // Now fill the binding information for
result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        // Binding for the order line rowsets (each
consist of one row).

```

```

        // Bind to offsets of the OL_NEW_ORDER_DATA
structure instead of NEW_ORDER_DATA.
        // IRowset::GetData() will be passed
individual array slots OL[i] to fetch the data
        // from the row set.

        i = 0;
        // NewOrder output column 1
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_name),
sizeof(m_txn.NewOrder.OL[0].ol_i_name), DBTYPE_STR);

        // NewOrder output column 2
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_stock),
sizeof(m_txn.NewOrder.OL[0].ol_stock), DBTYPE_I2);

        // NewOrder output column 3
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_brand_generic),
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic),
DBTYPE_STR);

        // NewOrder output column 4
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_price),
sizeof(m_txn.NewOrder.OL[0].ol_i_price), DBTYPE_R8);

        // NewOrder output column 5
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_amount),
sizeof(m_txn.NewOrder.OL[0].ol_amount), DBTYPE_R8);

        // Now fill the binding information for
result set 2 output columns
        InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

        i = 0;
        // NewOrder output column 1
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, w_tax),
sizeof(m_txn.NewOrder.w_tax), DBTYPE_R8);

        // NewOrder output column 2
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, d_tax),
sizeof(m_txn.NewOrder.d_tax), DBTYPE_R8);

        // NewOrder output column 3
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_id),
sizeof(m_txn.NewOrder.o_id), DBTYPE_I4);

        // NewOrder output column 4
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_last),
sizeof(m_txn.NewOrder.c_last), DBTYPE_STR);

        // NewOrder output column 5

```

```

        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, c_discount),
        sizeof(m_txn.NewOrder.c_discount), DBTYPE_R8);

        // NewOrder output column 6
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, c_credit),
        sizeof(m_txn.NewOrder.c_credit), DBTYPE_STR);

        // NewOrder output column 7
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, o_entry_d),
        sizeof(m_txn.NewOrder.o_entry_d),
        DBTYPE_DBTIMESTAMP);

        // NewOrder output column 8
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, o_commit_flag),
        sizeof(m_txn.NewOrder.o_commit_flag), DBTYPE_I2);

        for (j=0; j<MAX_OI_NEW_ORDER_ITEMS; j++)
        {
            // Set command text first

            // Print the fixed first portion
            // of parameters
            i = _snprintf(szName,
            sizeof(szName)/sizeof(szName[0]),
            L"(call %stpc neworder (? ,? ,? ,? ,? ,",
            m_szSPPrefix);

            // Now print the variable portion
            depending on the number of order line parameters
            for (iOLCount = 0; iOLCount <= j;
            ++iOLCount)
            {
                i +=

                _snprintf(&szName[i],
                sizeof(szName)/sizeof(szName[0]) - i, L",? ,? ,? ,");

                }

                // Print the fixed end
                if (j != MAX_OI_NEW_ORDER_ITEMS -
                1)
                    { // append 'default' for
                    the parameters that are not used
                    i +=

                    _snprintf(&szName[i],
                    sizeof(szName)/sizeof(szName[0]) - i, L",default)");
                    }

                    else // using all 15 order
                    line parameters
                    {
                        i +=
                        _snprintf(&szName[i],
                        sizeof(szName)/sizeof(szName[0]) - i, L")");
                    }

                    // Create and Prepare a new
                    command object for NewOrder.
    
```

```

        CreateCommand(szName,
        &m_pINewOrderCommand[j]);

        // Now create the input accessor
        for this prepared command
        hr = m_pINewOrderCommand[j]->QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {

            ThrowError(m_pINewOrderCommand[j],
            COLEDBERR::eQueryInterface, "InitNewOrderParams()");
        }

        hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        5 +
        3 * (j + 1),
        acInputDBBinding,
        sizeof(NEW_ORDER_DATA),
        &m_hNewOrderInputAccessor[j],
        acInputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        m_NewOrderExecuteParams[j].cParamSets = 1;
        // m_NewOrderExecuteParams.hAccessor is set dynamically
        at run-time
        // based on the number of new
        order items for the particular transaction call.

        m_NewOrderExecuteParams[j].hAccessor =
        m_hNewOrderInputAccessor[j];
        m_NewOrderExecuteParams[j].pData
        = &m_txn.NewOrder;

        // Create accessor for the first
        rowset
        hr = pIAccessor->CreateAccessor(
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(OL_NEW_ORDER_DATA),
    
```

```

        &m_hNewOrderOutputAccessor[j],
        acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        // Create accessor for the second
        rowset
        hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA, //
        cannot be optimized too because #1 accessor is
        nOutputParams2,
        acOutputDBBinding2,
        sizeof(NEW_ORDER_DATA),
        &m_hNewOrderOutputAccessor2[j],
        acOutputDBBindStatus2);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        pIAccessor->Release();
    }

    void CTPCC_OLEDB::NewOrder()
    {
        HRESULT hr;
        int iTryCount = 0;
        IMultipleResults* pMultipleResults;
        IRowset* pRowset;
        IRowset* pRowset2;
        LONG cRows = 1; // number of rows
        returned in the 1st rowset
        ULONG cRowsObtained;
        HROW rghRows; //returned row handles
        for the 1st result set
        HROW* prghRows = &rghRows;
        LONG cRows2 = 1; // number of rows
        returned in the 2nd rowset
        ULONG cRowsObtained2;
        HROW rghRows2; //returned row handle
        for the 2nd result set
        HROW* prghRows2 = &rghRows2;
        int i;
        long lRowsAffected; // the number of
        affected rows for a rowset
    }
}

```

```

int
iHandleIndex; // index into the
handle arrays based on the orders count

// check whether any order lines are for a
remote warehouse
m_txn.NewOrder.o_all_local = 1;
for (i = 0; i < m_txn.NewOrder.o.ol_cnt;
i++)
{
    if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
    {

        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
            break;
    }
}

iHandleIndex = m_txn.NewOrder.o.ol_cnt - 1;
// for convenience

while (TRUE)
{
    try
    {
        // Execute the prepared
command (according to the number of new orders)
        // Ask for
IMultipleResults because it returns 2 rowsets.
        hr =
m_pINewOrderCommand[iHandleIndex]->Execute(
NULL, IID_IMultipleResults,
&m_NewOrderExecuteParams[iHandleIndex],
NULL,
(IUnknown **)&pMultipleResults);
        if (FAILED(hr))
        {

ThrowError(m_pINewOrderCommand[iHandleIndex],
COLEDBERR::eExecute, "NewOrder()");
        }
    }

    //////////////////////////////////////////////////////////////////
    // Get order line
results
    //////////////////////////////////////////////////////////////////

    m_txn.NewOrder.total_amount = 0;
        for (i = 0; i <
m_txn.NewOrder.o.ol_cnt; ++i)

```

```

    {
        // Get the
first rowset object
        hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset);
        if
(FAILED(hr))
        {

            char szTmp[256];

            _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=0x%X", i, hr);

            ThrowError(m_pINewOrderCommand[m_txn.NewOrd
er.o.ol_cnt - 1], COLEDBERR::eGetResult, szTmp);
        }

        // Fetch the
result row handle(s)
        hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
        if
(FAILED(hr))
        {

            ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
        }

        // Fetch the
actual row data by handle
        hr = pRowset-
>GetData(rghRows,
m_hNewOrderOutputAccessor[iHandleIndex],
&m_txn.NewOrder.OL[i]);
        if
(FAILED(hr))
        {

            ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
        }

        m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;

        // Release
row(s)
        hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
        // Release
rowset
        hr = pRowset-
>Release();
    }

```

```

    //////////////////////////////////////////////////////////////////
    // Get the second
rowset object
    //////////////////////////////////////////////////////////////////
    hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset2);
    if (FAILED(hr))
    {
        char
szTmp[256];

        _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=%d", i, hr);

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetResult, szTmp);
    }

    // Fetch the result row
handle(s)
    hr = pRowset2-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
    if (FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
    }

    // Fetch the actual row
data by handle
    hr = pRowset2-
>GetData(rghRows2,
m_hNewOrderOutputAccessor2[iHandleIndex],
&m_txn.NewOrder);
    if (FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
    }

    // Release row(s)
    hr = pRowset2-
>ReleaseRows(cRowsObtained2, prghRows2, NULL, NULL,
NULL);
    // Release rowset
    hr = pRowset2-
>Release();
    // Release the common
MultipleResults interface
    hr = pMultipleResults-
>Release();
    if
(m_txn.NewOrder.o_all_local == 1)

```

```

    {
        m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

        m_txn.NewOrder.exec_status_code = eOK;
    }
    else
    {
        m_txn.NewOrder.exec_status_code =
eInvalidItem;
    }
    break;
}

catch (COLEDBERR *e)
{
    if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
        throw;

    // hit deadlock;
    backoff for increasingly longer period
    delete e;
    Sleep(10 * iTryCount);
}

if (iTryCount)
//      throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitPaymentParams()
{
    int
        i;
    HRESULT
        hr;
    wchar_t
        szName[iMAX_SP_NAME_LEN];
    IAccessor*
        pIAccessor;
    const ULONG
        nInputParams = 7; // input parameters
    const ULONG
        nOutputParams = 27; // output result set
    columns
        // Structure to bind in accessor
        DBBINDING
        acInputDBBinding[nInputParams];
        DBBINDSTATUS
        acInputDBBindStatus[nInputParams];
        DBBINDING
        acOutputDBBinding[nOutputParams];
        DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];
    }

    // Set command text

```

```

        _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]), L"{call
%stpcc_payment(?, ?, ?, ?, ?, ?)}", m_szSPPrefix);

        // Create and Prepare a new command object
        for Payment.
            CreateCommand(szName, &m_pIPaymentCommand);

        // Describe the consumer buffer by filling
        in the array
        // of DBBINDING structures. Each binding
        associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

        i = 0;
        // Payment parameter 1
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, w_id),
sizeof(m_txn.Payment.w_id), DBTYPE_I4);

        // Payment parameter 2
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_w_id),
sizeof(m_txn.Payment.c_w_id), DBTYPE_I4);

        // Payment parameter 3
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, h_amount),
sizeof(m_txn.Payment.h_amount), DBTYPE_R8);

        // Payment parameter 4
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, d_id),
sizeof(m_txn.Payment.d_id), DBTYPE_UI1);

        // Payment parameter 5
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_d_id),
sizeof(m_txn.Payment.c_d_id), DBTYPE_UI1);

        // Payment parameter 6
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment parameter 7
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        hr = m_pIPaymentCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIPaymentCommand,
COLEDBERR::eQueryInterface, "InitPaymentParams()");
        }

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_PARAMETERDATA,

```

```

            nInputParams,
            acInputDBBinding,
            sizeof(PAYMENT_DATA),
            &m_hPaymentInputAccessor,
            acInputDBBindStatus);

        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
        }

        m_PaymentExecuteParams.cParamSets = 1;
        m_PaymentExecuteParams.hAccessor =
m_hPaymentInputAccessor;
        m_PaymentExecuteParams.pData =
&m_txn.Payment;

        // Now fill the binding information for
        output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        i = 0;
        // Payment output column 1
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment output column 2
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        // Payment output column 3
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, h_date),
sizeof(m_txn.Payment.h_date), DBTYPE_DBTIMESTAMP);

        // Payment output column 4
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_1),
sizeof(m_txn.Payment.w_street_1), DBTYPE_STR);

        // Payment output column 5
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_2),
sizeof(m_txn.Payment.w_street_2), DBTYPE_STR);

        // Payment output column 6
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_city),
sizeof(m_txn.Payment.w_city), DBTYPE_STR);

        // Payment output column 7
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_state),
sizeof(m_txn.Payment.w_state), DBTYPE_STR);

        // Payment output column 8
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_zip),
sizeof(m_txn.Payment.w_zip), DBTYPE_STR);

```

```

// Payment output column 9
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

// Payment output column 10
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 11
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 12
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 13
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 14
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_first),
sizeof(m_txn.Payment.c_first), DBTYPE_STR);

// Payment output column 15
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_middle),
sizeof(m_txn.Payment.c_middle), DBTYPE_STR);

// Payment output column 16
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

// Payment output column 17
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 18
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 19
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 20
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 21

```

```

SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_phone),
sizeof(m_txn.Payment.c_phone), DBTYPE_STR);

// Payment output column 22
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_since),
sizeof(m_txn.Payment.c_since), DBTYPE_DBTIMESTAMP);

// Payment output column 23
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit),
sizeof(m_txn.Payment.c_credit), DBTYPE_STR);

// Payment output column 24
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit_lim),
sizeof(m_txn.Payment.c_credit_lim), DBTYPE_R8);

// Payment output column 25
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_discount),
sizeof(m_txn.Payment.c_discount), DBTYPE_R8);

// Payment output column 26
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_balance),
sizeof(m_txn.Payment.c_balance), DBTYPE_R8);

// Payment output column 27
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_data),
sizeof(m_txn.Payment.c_data), DBTYPE_STR);

hr = pIAccessor->CreateAccessor(
DBACCESSOR_OPTIMIZED,
nOutputParams,
acOutputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentOutputAccessor,
acOutputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
}

void CTPCC_OLEDB::Payment()
{
    HRESULT hr;
    int iTryCount = 0;
    IRowset* pRowset;
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG cRowsObtained;
    HROW rghRow;
    //returned row handles

```

```

HROW* prghRow =
&rghRow;

if (m_txn.Payment.c_id != 0)
    m_txn.Payment.c_last[0] = 0;

while (TRUE)
{
    try
    {
        // Execute the prepared command
        hr =
m_pIPaymentCommand->Execute(NULL, IID_IRowset,
&m_PaymentExecuteParams, NULL,
(IUnknown **)&pRowset);
        if (FAILED(hr))
        {
            ThrowError(m_pIPaymentCommand,
COLEDBERR::eExecute, "Payment()");
        }
    }
    // Fetch the result row handle(s)
    hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
    if (FAILED(hr))
    {
        ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetNextRows, "Payment()");
    }
    // Fetch the actual row data by handle
    hr = pRowset-
>GetData(rghRow, m_hPaymentOutputAccessor,
&m_txn.Payment);
    if (FAILED(hr))
    {
        ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetData, "Payment()");
    }
}

// Release row(s)
hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
// Release rowset
hr = pRowset-
>Release();
if (m_txn.Payment.c_id
== 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else

```

```

m_txn.Payment.exec_status_code = eOK;

        break;
    }
    catch (COLEDBERR *e)
    {
        if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

//     if (iTryCount)
//         throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitOrderStatusParams()
{
    int             i;
    HRESULT          hr;
    wchar_t          szName[iMAX_SP_NAME_LEN];
    IAccessor*       pIAccessor;
    const ULONG      nInputParams = 4;    // input parameters
    const ULONG      nOutputParams = 5;   // output 1st result
set columns
    const ULONG      nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING      acInputDBBinding[nInputParams];
    DBBINDSTATUS    acInputDBBindStatus[nInputParams];
    DBBINDING      acOutputDBBinding[nOutputParams];
    DBBINDSTATUS    acOutputDBBindStatus[nOutputParams];
    DBBINDING      acOutputDBBind2[nOutputParams2];
    DBBINDSTATUS    acOutputDBBindStatus2[nOutputParams2];

    // Set command text
    _snprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"\{call
%stpcc_orderstatus (?,?,?,?,?)\}", m_szSPPrefix);
}

```

```

        // Create and Prepare a new command object
        for OrderStatus.
        CreateCommand(szName,
&m_pIOOrderStatusCommand);

        // Describe the consumer buffer by filling
        in the array
        // of DBBINDING structures.  Each binding
        associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

        i = 0;
        // OrderStatus parameter 1
        SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, w_id),
sizeof(m_txn.OrderStatus.w_id), DBTYPE_I4);

        // OrderStatus parameter 2
        SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, d_id),
sizeof(m_txn.OrderStatus.d_id), DBTYPE_UI1);

        // OrderStatus parameter 3
        SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

        // OrderStatus parameter 4
        SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

        hr = m_pIOOrderStatusCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {

            ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eQueryInterface,
"InitOrderStatusParams()");
        }

        hr = pIAccessor->CreateAccessor(
                                DBACCESSOR_PARAMETERDATA,
                                nInputParams,
                                acInputDBBinding,
                                sizeof(ORDER_STATUS_DATA),
                                &m_hOrderStatusInputAccessor,
                                acInputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
        }

        m_OrderStatusExecuteParams.cParamSets = 1;
        m_OrderStatusExecuteParams.hAccessor =
m_hOrderStatusInputAccessor;

```

```

        m_OrderStatusExecuteParams.pData =
&m_txn.OrderStatus;

        // Now fill the binding information for
        result set 1 output columns
        InitBindings(&acOutputDBBind[0],
nOutputParams, eOutputColumn);

        // Binding for a rowset that may return
        more than one row.
        // Bind to offsets of the
        OL_ORDER_STATUS_DATA structure instead of
        ORDER_STATUS_DATA.
        // IRowset::GetData() will be passed
        individual array slots OL[i] to fetch the data
        // from the row set.

        i = 0;
        // OrderStatus output column 1
        SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_supply_w_id),
sizeof(m_txn.OrderStatus.OL[0].ol_supply_w_id),
DBTYPE_I4);

        // OrderStatus output column 2
        SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_i_id),
sizeof(m_txn.OrderStatus.OL[0].ol_i_id), DBTYPE_I4);

        // OrderStatus output column 3
        SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_quantity),
sizeof(m_txn.OrderStatus.OL[0].ol_quantity),
DBTYPE_I2);

        // OrderStatus output column 4
        SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_amount),
sizeof(m_txn.OrderStatus.OL[0].ol_amount),
DBTYPE_R8);

        // OrderStatus output column 5
        SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_delivery_d),
sizeof(m_txn.OrderStatus.OL[0].ol_delivery_d),
DBTYPE_DBTIMESTAMP);

        hr = pIAccessor->CreateAccessor(
                                DBACCESSOR_ROWDATA |
                                DBACCESSOR_OPTIMIZED,
                                nOutputParams,
                                acOutputDBBind,
                                sizeof(OL_ORDER_STATUS_DATA),
                                &m_hOrderStatusOutputAccessor,
                                acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
        }

```

```

        // Now fill the binding information for
result set 2 output columns
    InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

    i = 0;
    // OrderStatus output column 1
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

    // OrderStatus output column 2
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

    // OrderStatus output column 3
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_first),
sizeof(m_txn.OrderStatus.c_first), DBTYPE_STR);

    // OrderStatus output column 4
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_middle),
sizeof(m_txn.OrderStatus.c_middle), DBTYPE_STR);

    // OrderStatus output column 5
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_entry_d),
sizeof(m_txn.OrderStatus.o_entry_d),
DBTYPE_DBTIMESTAMP);

    // OrderStatus output column 7
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_carrier_id),
sizeof(m_txn.OrderStatus.o_carrier_id), DBTYPE_I2);

    // OrderStatus output column 8
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_balance),
sizeof(m_txn.OrderStatus.c_balance), DBTYPE_R8);

    // OrderStatus output column 9
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_id),
sizeof(m_txn.OrderStatus.o_id), DBTYPE_I4);

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA, // /
cannot be optimized too because #1 accessor is
        nOutputParams2,
        acOutputDBBinding2,
        sizeof(NEW_ORDER_DATA),
&m_hOrderStatusOutputAccessor2,
        acOutputDBBindStatus2);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
    }

```

```

    }

void CTPCC_OLEDB::OrderStatus()
{
    HRESULT hr;
    int iTryCount = 0;
    IMultipleResults* pMultipleResults;
    IRowset* pRowset;
    IRowset* pRowset2;
    LONG cRows = MAX_OI_ORDER_STATUS_ITEMS; // number of rows returned in the 1st rowset
    ULONG cRowsObtained;
    HROW rghRows[MAX_OI_ORDER_STATUS_ITEMS];
    //returned row handles for the 1st result set
    HROW* prghRows = &rghRows[0];
    LONG cRows2 = 1; // number of rows returned in the 2nd rowset
    ULONG cRowsObtained2;
    HROW rghRows2; //returned row handle for the 2nd result set
    HROW* prghRows2 = &rghRows2;
    int i;
    long lRowsAffected; // the number of affected rows for a rowset
    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            // Execute the prepared command
            // Ask for IMultipleResults because it returns 2 rowsets.
            hr =
m_pIOOrderStatusCommand->Execute(NULL,
IID_IMultipleResults, &m_OrderStatusExecuteParams,
NULL,
(IUnknown **)&pMultipleResults);
            if (FAILED(hr))
            {
                ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eExecute, "OrderStatus()");
            }
        }

```

```

        //////////////////////////////// // Get order line results ///////////////////////////////
object
        // Get the first rowset object
        hr = pMultipleResults->GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset);
        if (FAILED(hr))
        {
            ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
        }
        // Fetch the result row handle(s)
        hr = pRowset->GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
        if (FAILED(hr))
        {
            ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
        }
        m_txn.OrderStatus.o_ol_cnt =
(cshort)cRowsObtained;
        // Get the data from multiple rows in this rowset
        for (i = 0; i < m_txn.OrderStatus.o_ol_cnt; ++i)
        {
            // Fetch the actual row data by handle
            hr = pRowset->GetData(rghRows[i], m_hOrderStatusOutputAccessor,
&m_txn.OrderStatus.OL[i]);
            if (FAILED(hr))
            {
                ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
            }
            // Release row(s)
            hr = pRowset->ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
            // Release rowset
            hr = pRowset->Release();
        }

```

```

////////////////////////////// // Get the second
rowset object

////////////////////////////// if
(m_txn.OrderStatus.o.ol_cnt > 0)
{
    hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset2); if
(FAILED(hr))
{
    ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
}

// Fetch the
result row handle(s) hr =
pRowset2->GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2); if
(FAILED(hr))
{
    ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
}

// Fetch the
actual row data by handle hr =
pRowset2->GetData(rghRows2,
m_hOrderStatusOutputAccessor2, &m_txn.OrderStatus); if
(FAILED(hr))
{
    ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
}

// Release
row(s) hr =
pRowset2->Release(); }

// Release the common
MultipleResults interface hr = pMultipleResults-
>Release();

if
(m_txn.OrderStatus.o.ol_cnt == 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_NO_SUCH_ORDER );

```

```

else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else

    m_txn.OrderStatus.exec_status_code = eOK;

    break;
}
catch (COLEDBERR *e)
{
    if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
        throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    if (iTryCount)
    // throw new
    CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitDeliveryParams()
{
    int
        i;
    HRESULT
    hr;
    wchar_t
    szName[iMAX_SP_NAME_LEN];
    IAccessor*
    pIAccessor;
    const
    ULONG
    nInputParams = 2; // input parameters
    const
    ULONG
    nOutputParams = 10; // output 1st result
set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBindBinding[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBindBinding[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];

    // Set command text
    _snprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"{call %stpcc_delivery
(?,?)}", m_szSPPrefix);

```

```

// Create and Prepare a new command object
for Delivery.
CreateCommand(szName,
&m_pIDeliveryCommand);

// Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
InitBindings(&acInputDBBindBinding[0],
nInputParams, eInputParameter);

i = 0;
// Delivery parameter 1
SetBinding(&acInputDBBindBinding[i++],
offsetof(DELIVERY_DATA, w_id),
sizeof(m_txn.Delivery.w_id), DBTYPE_I4);

// Delivery parameter 2
SetBinding(&acInputDBBindBinding[i++],
offsetof(DELIVERY_DATA, o_carrier_id),
sizeof(m_txn.Delivery.o_carrier_id), DBTYPE_I2);

hr = m_pIDeliveryCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
if (FAILED(hr))
{
    ThrowError(m_pIDeliveryCommand,
COLEDBERR::eQueryInterface, "InitDeliveryParams()");
}

hr = pIAccessor->CreateAccessor(
    DBACCESSOR_PARAMETERDATA,
    nInputParams,
    acInputDBBindBinding,
    sizeof(DELIVERY_DATA),
    &m_hDeliveryInputAccessor,
    acInputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
}

m_DeliveryExecuteParams.cParamSets = 1;
m_DeliveryExecuteParams.hAccessor =
m_hDeliveryInputAccessor;
m_DeliveryExecuteParams.pData =
&m_txn.Delivery;

// Now fill the binding information for
result set 1 output columns
InitBindings(&acOutputDBBindBinding[0],
nOutputParams, eOutputColumn);

// Binding for a rowset that may return
more than one row.
for (i = 0; i < 10; ++i)
{
    // Delivery output column 1
}

```

```

        SetBinding(&acOutputDBBinding[i],
        offsetof(DELIVERY_DATA, o_id[i]),
        sizeof(m_txn.Delivery.o_id[i]), DBTYPE_I4);
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(DELIVERY_DATA),
        &m_hDeliveryOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
        COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
    }

void CTPCC_OLEDB::Delivery()
{
    HRESULT hr;
    int iTryCount = 0;
    IRowset* pRowset;
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG cRowsObtained;
    HROW rghRow;
    //returned row handles
    HROW* prghRow =
    &rghRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
            command
            hr =
m_pIDeliveryCommand->Execute(NULL, IID_IRowset,
&m_DeliveryExecuteParams, NULL,
(IUnknown **)&pRowset);
            if (FAILED(hr))
            {

                ThrowError(m_pIDeliveryCommand,
                COLEDBERR::eExecute, "Delivery()");
            }
        }

        // Fetch the result row
        handle(s)
        hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained);
        if (FAILED(hr))
        {

```

```

        ThrowError(m_pIDeliveryCommand,
        COLEDBERR::eGetNextRows, "Delivery()");
    }

    // Fetch the actual row
    data by handle
    hr = pRowset-
>GetData(rghRow, m_hDeliveryOutputAccessor,
&m_txn.Delivery);
    if (FAILED(hr))
    {

        ThrowError(m_pIDeliveryCommand,
        COLEDBERR::eGetData, "Delivery()");
    }

    // Release row(s)
    hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
    // Release rowset
    hr = pRowset-
>Release();

    m_txn.Delivery.exec_status_code = eOK;
    break;
}
catch (COLEDBERR *e)
{
    if (((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
        throw;
}

// hit deadlock;
backoff for increasingly longer period
delete e;
Sleep(10 * iTryCount);
}

// if (iTryCount)
//     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

```

tpcc_oledb.h

```

/*
 *      FILE:          TPCC_OLEDB.H
 *                      Microsoft
 *      TPC-C Kit Ver. 4.20.000
 *      Copyright
 *      Microsoft, 1999-2004
 *      Written by
 *      Sergey Vasilevskiy
 *          All Rights Reserved
 *
 *
 */

```

```

/*
 *      PURPOSE: Header file for TPC-C txn class
 *      OLE DB implementation.
 *
 */
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

#define iMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

// Type of parameter and result set column bindings.
enum eBindingType
{
    eInputParameter,
    eOutputParameter,
    eInputOutputParameter,
    eOutputColumn
};

class COLEDBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eQueryInterface,
        // error from QueryInterface
        eCreateSession,
        eCreateCommand,
        eSetCommandText,
        eExecute,
        eCreateAccessor,
        ePrepare,
        eGetNextRows,
        eGetData,
        eGetResult
    };
    COLEDBERR(LPCTSTR szLoc)
        : CBaseErr(szLoc)
    {
        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_OLEDBErrStr = NULL;
    };
    ~COLEDBERR()
    {
        if (m_OLEDBErrStr !=
NULL)
            delete []
        m_OLEDBErrStr;
    }

```

```

        };

        ACTION     m_eAction;
        int       m_NativeError;
        BOOL      m_bDeadLock;
        char     *m_OLEDBErrStr;

        int           ErrorType();
{return ERR_TYPE_OLEDB; }    char*   ErrorTypeStr() { return
"OLEDB"; }
        int           ErrorNum();
{return m_NativeError; }    char*   ErrorText() { return
m_OLEDBErrStr; }
        int           ErrorAction();
{ return (int)m_eAction; }

};

class CTPCC_OLEDB_ERR : public CBaseErr
{
public:
    enum TPCC_OLEDB_ERRS
    {
        ERR_WRONG_SP_VERSION =
1,          // "Wrong version of stored procs on
database server"
        ERR_INVALID_CUST,
        // "Invalid Customer id.name."
        ERR_NO SUCH_ORDER,
        // "No orders found for
customer."
        ERR_RETRYED_TRANS,
        // "Retries before transaction
succeeded."
    };

    CTPCC_OLEDB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; }

    CTPCC_OLEDB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; }

    int           m_errno;
    int           m_iTryCount;
    int           ErrorType();
{return ERR_TYPE_TPCC_OLEDB; }    char*   ErrorTypeStr() { return
"TPCC OLEDB"; }
    int           ErrorNum();
{return m_errno; }
    char*   ErrorText();
};

class DllDecl CTPCC_OLEDB : public CTPCC_BASE
{
private:

```

```

        // declare variables and private
functions here...
        BOOL
        m_bDeadlock;                      // transaction was selected as deadlock victim
        int
                                         m_MaxRetries;
                                         // retry count on deadlock

        DBPROPSET
        m_rgInitPropSet;                  // initialization property set used to establish a
connection
        DBPROP
        m_InitProperties[4];              // individual initialization properties

        IDBCreateSession*
        m_pIDBCreateSession;             // session
(connection) interface
        IDBCreateCommand*
        m_pIDBCreateCommand;             // SQL
command creation interface

        IMalloc*
        m_pIMalloc;
        // Needed to release error strings.

        // StockLevel
        ICommandText*
        m_piStockLevelCommand;
        HACCESSOR
        m_hStockLevelInputAccessor;      // accessor
to bind input parameters
        HACCESSOR
        m_hStockLevelOutputAccessor;     // accessor
to bind output columns
        DBPARAMS
        m_StockLevelExecuteParams;       // parameter structure for Execute

        // NewOrder
        // One prepared command for each
possible number of new order line items
        ICommandText*
        m_pINewOrderCommand[MAX_OI_NEW_ORDER_ITEMS];
        // accessors to bind input
parameters
        // one for each possible number
of new order line items
        HACCESSOR
        m_hNewOrderInputAccessor[MAX_OI_NEW_ORDER_I
TEMS];
        // accessor to bind output
columns of the first rowset
        HACCESSOR
        m_hNewOrderOutputAccessor[MAX_OI_NEW_ORDER_
ITEMS];
        // accessor to bind output
columns of the second rowset

```

```

        HACCESSOR
        m_hNewOrderOutputAccessor2[MAX_OI_NEW_ORDER
 ITEMS];
        // parameter structure for
Execute
        DBPARAMS
        m_NewOrderExecuteParams[MAX_OI_NEW_ORDER_IT
EMS];

        // Payment
        ICommandText*
        m_piPaymentCommand;
        HACCESSOR
        m_hPaymentInputAccessor;          // accessor
to bind input parameters
        HACCESSOR
        m_hPaymentOutputAccessor;         // accessor
to bind output columns
        DBPARAMS
        m_PaymentExecuteParams;          // parameter structure for Execute

        // OrderStatus
        ICommandText*
        m_piOrderStatusCommand;
        HACCESSOR
        m_hOrderStatusInputAccessor;      // accessor
to bind input parameters
        HACCESSOR
        m_hOrderStatusOutputAccessor;     // accessor
to bind output columns
        HACCESSOR
        m_hOrderStatusOutputAccessor2;    // accessor
accessor to bind output columns
        DBPARAMS
        m_OrderStatusExecuteParams;       // parameter structure for Execute

        // Delivery
        ICommandText*
        m_piDeliveryCommand;
        HACCESSOR
        m_hDeliveryInputAccessor;         // accessor
to bind input parameters
        HACCESSOR
        m_hDeliveryOutputAccessor;        // accessor
to bind output columns
        DBPARAMS
        m_DeliveryExecuteParams;          // parameter
structure for Execute

        wchar_t
        m_szSPPrefix[32];               // stored
procedures prefix
                                         // new-order specific fields
        int
                                         m_no_commit_flag;

void ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation );

```

```

        void CheckSPVersion();
        void InitNewOrderParams();
        void InitPaymentParams();
        void InitDeliveryParams();
        void InitStockLevelParams();
        void InitOrderStatusParams();

        // Helper function to create and
        prepare a command
        void CreateCommand(wchar_t*
szSQLCommand, ICommandText** ppICommandText);
        // Helper function to prepare a
        command
        void PrepareCommand(ICommandText*
pICommand);

        // Helper function to fill one
        binding
        // Used for both input parameter
        and output column bindings
        void SetBinding(DBBINDING*
pDBBinding, size_t obValue, size_t cbMaxLen, DBTYPE
wType);

        // Helper function to initialize
        an array of bindings
        void InitBindings(DBBINDING*
pDBBindings, int iCount, eBindingType BindingType);

        union
        {
            NEW_ORDER_DATA
            PAYMENT_DATA
            DELIVERY_DATA
            STOCK_LEVEL_DATA
            ORDER_STATUS_DATA
        };
        m_txn;

        public:
            CTPCC_OLEDB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase, LPCWSTR szSPPrefix);
            ~CTPCC_OLEDB(void);

            inline PNEW_ORDER_DATA
            BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
            inline PPAYMENT_DATA
            BuffAddr_Payment() { return
&m_txn.Payment; };
            inline PDELIVERY_DATA
            BuffAddr_Delivery() { return
&m_txn.Delivery; };

```

```

        inline PSTOCK_LEVEL_DATA
        BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
        inline PORDER_STATUS_DATA
        BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

        void NewOrder(); void Payment(); void Delivery(); void StockLevel(); void OrderStatus();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_OLEDB* CTPCC_OLEDB_new
    ( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase, LPCWSTR
szSPPrefix );

typedef CTPCC_OLEDB* (TYPE_CTPCC_OLEDB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCWSTR);

```

trans.h

```

/*      FILE:          TRANS.H
*      *          Microsoft
TPC-C Kit Ver. 4.42.000
*          Copyright
Microsoft, 2002
*          All Rights Reserved
*
*          Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*          PURPOSE: Header file for TPC-C structure
templates.
*
*          Change history:
*          4.42.000 - changed w_id fields
from short to long to support >32K warehouses
*          4.20.000 - updated rev number to
match kit
*/
#pragma once

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2

```

```

#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define DATETIME_LEN 30
#define CREDIT_LEN 2
#define C_DATA_LEN 250
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_DL_NEW_ORDER_ITEMS 15
#define MAX_DL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24

// TIMESTAMP_STRUCT is provided by the ODBC header
file sqatypes.h, but is not available
// when compiling with dblib, so redefined here.
Note: we are using the symbol "__SQLTYPES"
// (declared in sqatypes.h) as a way to determine if
TIMESTAMP_STRUCT has been declared.
#ifndef __SQLTYPES
typedef struct
{
    /* SQLSMALLINT */ short
    year; unsigned short /* */
    SQLUSMALLINT */ month; unsigned short /* */
    SQLUSMALLINT */ day; unsigned short /* */
    SQLUSMALLINT */ hour; unsigned short /* */
    SQLUSMALLINT */ minute; unsigned short /* */
    SQLUSMALLINT */ second; unsigned short /* */
    SQLUInteger */ fraction; unsigned long /* */
} TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after
transaction completes
enum EXEC_STATUS
{
    eOK, // 0
    "Transaction committed."
    eInvalidItem, // 1 "Item number
is not valid."
    eDeliveryFailed // 2 "Delivery
Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    long ol_supply_w_id;
    long ol_i_id;
}

```

```

short
ol_quantity;

// output params
char
ol_i_name[I_NAME_LEN+1];
char
ol_brand_generic[BRAND_LEN+1];
double
ol_i_price;
double
ol_amount;
short
ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    long      w_id;
    short     d_id;
    long      c_id;
    short     o.ol_cnt;

    // output params
    EXEC_STATUS
    exec_status_code;
    char
    c_last[LAST_NAME_LEN+1];
    char      c_credit[CREDIT_LEN+1];
    double   c_discount;
    double   w_tax;
    double   d_tax;
    long     o_id;
    short    o_commit_flag;
    TIMESTAMP_STRUCT  o_entry_d;
    short    o_all_local;
    double   total_amount;
    OL_NEW_ORDER_DATA
    OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    long
    w_id;
    short
    d_id;
    long
    c_id;
    short
    c_d_id;
    long
    c_w_id;
    double
    h_amount;
    char
    c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS
    exec_status_code;
}

TIMESTAMP_STRUCT      h_date;
char
w_street_1[ADDRESS_LEN+1];
char
w_street_2[ADDRESS_LEN+1];
char
w_city[ADDRESS_LEN+1];
char
w_state[STATE_LEN+1];
char
w_zip[ZIP_LEN+1];
char
d_street_1[ADDRESS_LEN+1];
char
d_street_2[ADDRESS_LEN+1];
char
d_city[ADDRESS_LEN+1];
char
d_state[STATE_LEN+1];
char
d_zip[ZIP_LEN+1];
char
c_first[FIRST_NAME_LEN+1];
char
c_middle[MIDDLE_NAME_LEN+1];
char
c_street_1[ADDRESS_LEN+1];
char
c_street_2[ADDRESS_LEN+1];
char
c_city[ADDRESS_LEN+1];
char
c_state[STATE_LEN+1];
char
c_zip[ZIP_LEN+1];
char
c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT      c_since;
char
c_credit[CREDIT_LEN+1];
double
c_credit_lim;
double
c_discount;
double
c_balance;
char
c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long
    ol_i_id;
    long
    ol_supply_w_id;
    short
    ol_quantity;
    double
    ol_amount;
    TIMESTAMP_STRUCT  ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    // input params
    long      w_id;
    short     d_id;
    long      c_id;
    char
    c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS
    exec_status_code;
    char
    c_first[FIRST_NAME_LEN+1];
    char
    c_middle[MIDDLE_NAME_LEN+1];
    double
    long
    TIMESTAMP_STRUCT
    OL_ORDER_STATUS_DATA
    OL[MAX_OL_ORDER_STATUS_ITEMS];
    short
    o.ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    long      w_id;
    short     o_carrier_id;

    // output params
    EXEC_STATUS
    exec_status_code;
    SYSTEMTIME
    queue_time;
    long
    o_id[10];           // id's of delivered
orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery
transactions and for writing them to the delivery
server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME
    queue;
    //time delivery transaction queued
    long
    w_id;
    //delivery warehouse
    short
    o_carrier_id;
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    long
    w_id;
    short
    d_id;
    short
    threshold;
} output params

```

```

    EXEC_STATUS
exec_status_code;
long
low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

txn_base.h

```

/*      FILE:          TXN_BASE.H
 *
 *      Microsoft
TPC-C Kit Ver. 4.20.000
 *
Copyright
Microsoft, 1999
*           All Rights Reserved
*
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
PURPOSE: Header file for TPC-C txn class
implementation.
*
* Change history:
*           4.20.000 - updated rev number to
match kit
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
BuffAddr_OrderStatus() = 0;

    virtual void NewOrder
() = 0;
    virtual void Payment
() = 0;
    virtual void Delivery
() = 0;
    virtual void StockLevel
() = 0;

```

```

    virtual void OrderStatus () = 0;
}

```

resource.h

```

{{NO_DEPENDENCIES}}
// Microsoft Developer
Studio generated
include file.
// Used by
tpcc_com_all.rc
//
#define IDS_PROJNAME
100
#define IDR_TPCC
101
#define IDR_NEWORDER
102
#define IDR_ORDERSTATUS
103
#define IDR_PAYMENT
104
#define IDR_STOCKLEVEL
105

// Next default values
for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE
E 202
#define _APS_NEXT_COMMAND_VALUE
32768
#define _APS_NEXT_CONTROL_VALUE
201
#define _APS_NEXT_SYMED_VALUE
106
#endif
#endif

{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1 101

// Next default values for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102

```

```

#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

Appendix B: *Database Design*

The TPC-C database was created with the following Transact-SQL scripts:

createdb.sql

```
-- File:      CREATEDB.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.68
--          Copyright Microsoft, 2005
--

SET ANSI_NULL_DFLT_OFF ON
GO

USE master
GO

----- Create temporary table for timing -----
IF EXISTS( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
    DROP TABLE tpcc_timer
GO

CREATE TABLE tpcc_timer
    (start_date  CHAR(30),
     end_date    CHAR(30))
GO

INSERT INTO tpcc_timer VALUES(0,0)
GO

----- Store starting time -----
UPDATE tpcc_timer
SET start_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))
GO

----- create main database files -----
```

```
----- CREATE DATABASE tpcc
ON PRIMARY
(
    NAME           = MSSQL_tpcc_root,
    FILENAME      = 'c:\MSSQL_tpcc_root.mdf',
    SIZE          = 8MB,
    FILEGROWTH   = 0),

FILEGROUP MSSQL_stk_fg
(
    NAME           = MSSQL_stk1,
    FILENAME      = 'c:\stk\stk1',
    SIZE          = 279500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_stk2,
    FILENAME      = 'c:\stk\stk2',
    SIZE          = 279500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_stk3,
    FILENAME      = 'c:\stk\stk3',
    SIZE          = 279500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_stk4,
    FILENAME      = 'c:\stk\stk4',
    SIZE          = 279500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_stk5,
    FILENAME      = 'c:\stk\stk5',
    SIZE          = 279500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_stk6,
    FILENAME      = 'c:\stk\stk6',
    SIZE          = 279500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_stk7,
    FILENAME      = 'c:\stk\stk7',
    SIZE          = 279500MB,
    FILEGROWTH   = 0),

FILEGROUP MSSQL_cust_fg
(
    NAME           = MSSQL_cust1,
    FILENAME      = 'c:\cust\cust1\' ,
    SIZE          = 209500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_cust2,
    FILENAME      = 'c:\cust\cust2\' ,
    SIZE          = 209500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_cust3,
    FILENAME      = 'c:\cust\cust3\' ,
    SIZE          = 209500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_cust4,
    FILENAME      = 'c:\cust\cust4\' ,
    SIZE          = 209500MB,
    FILEGROWTH   = 0),
(
    NAME           = MSSQL_cust5,
```

```

FILENAME  = 'c:\cust\cust5\',          SIZE           = 209500MB,
SIZE      = 0),                         FILEGROWTH    = 0),
( NAME     = MSSQL_cust6,              FILENAME     = 'c:\cust\cust6\' ,
SIZE      = 209500MB,                   SIZE           = 209500MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_cust7,              FILENAME     = 'c:\cust\cust7\' ,
SIZE      = 209500MB,                   SIZE           = 209500MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),

FILEGROUP MSSQL_ol_fg
( NAME     = MSSQL_ol1,                FILENAME     = 'c:\ol\ol1\' ,
SIZE      = 229990MB,                  SIZE           = 229990MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_ol2,                FILENAME     = 'c:\ol\ol2\' ,
SIZE      = 229990MB,                  SIZE           = 229990MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_ol3,                FILENAME     = 'c:\ol\ol3\' ,
SIZE      = 229990MB,                  SIZE           = 229990MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_ol4,                FILENAME     = 'c:\ol\ol4\' ,
SIZE      = 229990MB,                  SIZE           = 229990MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_ol5,                FILENAME     = 'c:\ol\ol5\' ,
SIZE      = 229990MB,                  SIZE           = 229990MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_ol6,                FILENAME     = 'c:\ol\ol6\' ,
SIZE      = 229990MB,                  SIZE           = 229990MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_ol7,                FILENAME     = 'c:\ol\ol7\' ,
SIZE      = 229990MB,                  SIZE           = 229990MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),

FILEGROUP MSSQL_misc_fg
( NAME     = MSSQL_misc1,              FILENAME     = 'c:\misc\misc1\' ,
SIZE      = 59900MB,                   SIZE           = 59900MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_misc2,              FILENAME     = 'c:\misc\misc2\' ,
SIZE      = 59900MB,                   SIZE           = 59900MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_misc3,              FILENAME     = 'c:\misc\misc3\' ,
SIZE      = 59900MB,                   SIZE           = 59900MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_misc4,              FILENAME     = 'c:\misc\misc4\' ,
SIZE      = 59900MB,                   SIZE           = 59900MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0)

```

```

SIZE           = 59900MB,
FILEGROWTH   = 0),
( NAME     = MSSQL_misc5,              FILENAME     = 'c:\misc\misc5\' ,
SIZE      = 59900MB,                   SIZE           = 59900MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_misc6,              FILENAME     = 'c:\misc\misc6\' ,
SIZE      = 59900MB,                   SIZE           = 59900MB,
FILEGROWTH = 0),                         FILEGROWTH   = 0),
( NAME     = MSSQL_misc7,              FILENAME     = 'c:\misc\misc7\' ,
SIZE      = 59900MB,                   SIZE           = 59900MB,
FILEGROWTH = 0)

LOG ON
( NAME     = MSSQL_tpcc_log_1,          FILENAME     = 'E:' ,
SIZE      = 1999900MB,                  SIZE           = 1999900MB,
FILEGROWTH = 0),
( NAME     = MSSQL_tpcc_log_2,          FILENAME     = 'F:' ,
SIZE      = 74169MB,                   SIZE           = 74169MB,
FILEGROWTH = 0)
COLLATE Latin1_General_BIN
GO

-----
-- Store ending time
-----
UPDATE tpcc_timer
SET end_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))
GO

SELECT DATEDIFF(second,(SELECT start_date FROM tpcc_timer),(SELECT end_date FROM tpcc_timer))
GO

-----
-- remove temporary table
-----
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
DROP TABLE tpcc_timer
GO



---



## backupdev.sql



---



```

-- File: BACKUPDEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2005
--

USE master

```


```

```

GO

-----
-- create backup devices
-----
EXEC sp_addumpdevice 'disk','tpccback7','U:\tpccback7.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback8','V:\tpccback8.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback9','W:\tpccback9.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback10','X:\tpccback10.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback11','Y:\tpccback11.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback12','Z:\tpccback12.dmp'
GO

```

backup.sql

```

-- File: BACKUP.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
--

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
        CONVERT(VARCHAR(30),@startdate, 21)

DUMP DATABASE tpcc TO tpccback7, tpccback8, tpccback9, tpccback10, tpccback11,
tpccback12 WITH init, stats = 1

SELECT @enddate = GETDATE()
SELECT 'End date: ', 
        CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ', 
        DATEDIFF(second, @startdate, @enddate)
GO

```

restore.sql

```

-- File: RESTORE.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
--

DECLARE @startdate DATETIME,

```

```

        @enddate     DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
        CONVERT(VARCHAR(30),@startdate, 21)

LOAD DATABASE tpcc FROM tpccback7, tpccback8, tpccback9, tpccback10, tpccback11,
tpccback12 WITH stats = 1, replace

SELECT @enddate = GETDATE()
SELECT 'End date: ', 
        CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ', 
        DATEDIFF(second, @startdate, @enddate)
GO

```

removedb.sql

```

-- File: REMOVEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
--

USE master
GO

----- remove any existing database and backup files -----
EXEC sp_dbremove tpcc, dropdev
GO

EXEC sp_dropdevice 'tpccback7'
GO
EXEC sp_dropdevice 'tpccback8'
GO
EXEC sp_dropdevice 'tpccback9'
GO
EXEC sp_dropdevice 'tpccback10'
GO
EXEC sp_dropdevice 'tpccback11'
GO
EXEC sp_dropdevice 'tpccback12'
GO

```

idxcuscl.sql

```

-- File: IDXCUSCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
```

```
--      Creates clustered index on customer table      --
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_c1' )
    DROP INDEX customer.customer_c1

CREATE UNIQUE CLUSTERED INDEX customer_c1 ON customer(c_w_id, c_d_id, c_id)
    ON MSSQL_cust_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxcusnc.sql

```
--      Creates non-clustered index on customer table      --
-----
-- File: IDXCUSNC.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates non-clustered index on customer table
-- USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_nc1' )
    DROP INDEX customer.customer_nc1

CREATE UNIQUE NONCLUSTERED INDEX customer_nc1 ON customer(c_w_id, c_d_id, c_last,
c_first, c_id)
    ON MSSQL_cust_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
       DATEDIFF(second, @startdate, @enddate)
```

GO

idxdiscl.sql

```
-----
-- File: IDXDISCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on district table
-- USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'district_c1' )
    DROP INDEX district.district_c1

CREATE UNIQUE CLUSTERED INDEX district_c1 ON district(d_w_id, d_id)
    WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxitmcl.sql

```
-----
-- File: IDXITMCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on item table
-- USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
       CONVERT(VARCHAR(30),@startdate,21)
```

```

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'item_c1' )
DROP INDEX item.item_c1

CREATE UNIQUE CLUSTERED INDEX item_c1 ON item(i_id)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxhiscl.sql

```

-- File: IDXHISCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on history table
-- CAUTION: This index is only beneficial for systems
-- CAUTION: with 8 or more processors.
-- CAUTION: It may negatively impact performance on
-- CAUTION: systems with less than 8 processors.

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'history_c1' )
DROP INDEX history.history_c1

CREATE UNIQUE CLUSTERED INDEX history_c1 ON history(h_c_w_id, h_date, h_c_d_id,
h_c_id, h_amount)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxnodcl.sql

HP TPC-C FULL DISCLOSURE REPORT
©2008 Hewlett-Packard Company. All rights reserved.

```

-- File: IDNXNODCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on new-order table
-- -----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'new_order_c1' )
DROP INDEX new_order.new_order_c1

CREATE UNIQUE CLUSTERED INDEX new_order_c1 ON new_order(no_w_id, no_d_id, no_o_id)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxodlcl.sql

```

-- File: IDXODLCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on order-line table
-- -----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'order_line_c1' )
DROP INDEX order_line.order_line_c1

```

```

CREATE UNIQUE CLUSTERED INDEX order_line_c1 ON order_line(o1_w_id, o1_d_id, o1_o_id,
o1_number)
ON MSSQL_o1_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxordcl.sql

```

-- File: IDXORDCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on orders table

-----  

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'orders_c1' )
    DROP INDEX orders.orders_c1

CREATE UNIQUE CLUSTERED INDEX orders_c1 ON orders(o_w_id, o_d_id, o_id)
ON MSSQL_msc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxstkcl.sql

```

-- File: IDXSTKCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on stock table

-----  


```

```

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'stock_c1' )
    DROP INDEX stock.stock_c1

CREATE UNIQUE CLUSTERED INDEX stock_c1 ON stock(s_i_id, s_w_id)
ON MSSQL_stk_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxwarcl.sql

```

-- File: IDXWARCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on warehouse table

-----  

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'warehouse_c1' )
    DROP INDEX warehouse.warehouse_c1

CREATE UNIQUE CLUSTERED INDEX warehouse_c1 ON warehouse(w_id)
WITH FILLFACTOR=100 ON MSSQL_msc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

tables.sql

```
-- File: TABLES.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates TPC-C tables

SET ANSI_NULL_DFLT_OFF ON
GO

USE tpcc
GO

----- Remove all existing TPC-C tables -----
if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
if exists ( select name from sysobjects where name = 'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )
    drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
    drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
    drop table stock
go

----- Create new tables -----
create table warehouse
(
    w_id          int,
    w_ytd         money,
    w_tax         smallmoney,
    w_name        char(10),
)
```

```
w_street_1           char(20),
w_street_2           char(20),
w_city               char(20),
w_state              char(2),
w_zip                char(9)
) on MSSQL_misc_fg
go

create table district
(
    d_id               tinyint,
    d_w_id              int,
    d_ytd               money,
    d_next_o_id         int,
    d_tax               smallmoney,
    d_name              char(10),
    d_street_1           char(20),
    d_street_2           char(20),
    d_city               char(20),
    d_state              char(2),
    d_zip                char(9)
) on MSSQL_misc_fg
go

create table customer
(
    c_id               int,
    c_d_id              tinyint,
    c_w_id              int,
    c_discount           smallmoney,
    c_credit_limit       money,
    c_last               char(16),
    c_first              char(16),
    c_credit              char(2),
    c_balance             money,
    c_ytd_payment        money,
    c_payment_cnt        smallint,
    c_delivery_cnt       smallint,
    c_street_1           char(20),
    c_street_2           char(20),
    c_city               char(20),
    c_state              char(2),
    c_zip                char(9),
    c_phone              char(16),
    c_since              datetime,
    c_middle              char(2),
    c_data                char(500)
) on MSSQL_cust_fg
go

-- Use the following table option if using c_data varchar(max)
-- sp_tableoption 'customer','large value types out of row','1'
-- go

create table history
(
    h_c_id               int,
    h_c_d_id              tinyint,
```

```

h_c_w_id      int,
h_d_id        tinyint,
h_w_id        int,
h_date        datetime,
h_amount      smallmoney,
h_data        char(24)
) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id      int,
    no_d_id      tinyint,
    no_w_id      int
) on MSSQL_misc_fg
go

create table orders
(
    o_id          int,
    o_d_id        tinyint,
    o_w_id        int,
    o_c_id        int,
    o_carrier_id tinyint,
    o.ol_cnt      tinyint,
    o.all_local   tinyint,
    o_entry_d     datetime
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id      int,
    ol_d_id      tinyint,
    ol_w_id      int,
    ol_number    tinyint,
    ol_i_id      int,
    ol_delivery_d datetime,
    ol_amount    smallmoney,
    ol_supply_w_id int,
    ol_quantity  smallint,
    ol_dist_info char(24)
) on MSSQL.ol_fg
go

create table item
(
    i_id          int,
    i_name        char(24),
    i_price       smallmoney,
    i_data        char(50),
    i_im_id       int
) on MSSQL_misc_fg
go

create table stock
(
    s_i_id        int,

```

```

s_w_id          int,
s_quantity     smallint,
s_ytd          int,
s_order_cnt   smallint,
s_remote_cnt  smallint,
s_data         char(50),
s_dist_01      char(24),
s_dist_02      char(24),
s_dist_03      char(24),
s_dist_04      char(24),
s_dist_05      char(24),
s_dist_06      char(24),
s_dist_07      char(24),
s_dist_08      char(24),
s_dist_09      char(24),
s_dist_10      char(24)
) on MSSQL_stk_fg
go

```

neword.sql

```

-- File: NEWORD.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates neworder stored procedure
-- Interface Level: 4.20.000
--
-----SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS ON
GO
USE tpcc
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO
CREATE PROCEDURE tpcc_neworder
    @w_id          int,
    @d_id          tinyint,
    @c_id          int,
    @o.ol_cnt      tinyint,
    @o.all_local   tinyint,
    @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
    @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,

```

```

@i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
@i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
@i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
@i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
@i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
@i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
@i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
@i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
@i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
DECLARE @w_tax      smallmoney,
        @d_tax      smallmoney,
        @c_last     char(16),
        @c_credit   char(2),
        @c_discount smallmoney,
        @i_price    smallmoney,
        @i_name     char(24),
        @i_data     char(50),
        @o_entry_d  datetime,
        @remote_flag int,
        @s_quantity smallint,
        @s_data     char(50),
        @s_dist     char(24),
        @li_no      int,
        @_id        int,
        @commit_flag tinyint,
        @li_id      int,
        @li_s_w_id  int,
        @li_qty    smallint,
        @ol_number  int,
        @c_id_local int

BEGIN
BEGIN TRANSACTION n
-----+
-- get district tax and next available order id and update
-- plus initialize local variables
-----+
UPDATE district
SET      @d_tax      = d_tax,
        @_id        = d_next_o_id,
        d_next_o_id = d_next_o_id + 1,
        @o_entry_d  = GETDATE(),
        @li_no      = 0,
        @commit_flag = 1
WHERE    d_w_id      = @w_id AND
        d_id       = @_id

-----+
-- process orderlines
-----+
WHILE (@li_no < @o.ol_cnt)
BEGIN
    SELECT @li_no = @li_no + 1

```

```

-----+
-- set i_id, s_w_id, and qty for this lineitem
-----+
SELECT @li_id = CASE @li_no
    WHEN 1 THEN @i_id1
    WHEN 2 THEN @i_id2
    WHEN 3 THEN @i_id3
    WHEN 4 THEN @i_id4
    WHEN 5 THEN @i_id5
    WHEN 6 THEN @i_id6
    WHEN 7 THEN @i_id7
    WHEN 8 THEN @i_id8
    WHEN 9 THEN @i_id9
    WHEN 10 THEN @i_id10
    WHEN 11 THEN @i_id11
    WHEN 12 THEN @i_id12
    WHEN 13 THEN @i_id13
    WHEN 14 THEN @i_id14
    WHEN 15 THEN @i_id15
END,
@li_s_w_id = CASE @li_no
    WHEN 1 THEN @s_w_id1
    WHEN 2 THEN @s_w_id2
    WHEN 3 THEN @s_w_id3
    WHEN 4 THEN @s_w_id4
    WHEN 5 THEN @s_w_id5
    WHEN 6 THEN @s_w_id6
    WHEN 7 THEN @s_w_id7
    WHEN 8 THEN @s_w_id8
    WHEN 9 THEN @s_w_id9
    WHEN 10 THEN @s_w_id10
    WHEN 11 THEN @s_w_id11
    WHEN 12 THEN @s_w_id12
    WHEN 13 THEN @s_w_id13
    WHEN 14 THEN @s_w_id14
    WHEN 15 THEN @s_w_id15
END,
@li_qty = CASE @li_no
    WHEN 1 THEN @ol_qty1
    WHEN 2 THEN @ol_qty2
    WHEN 3 THEN @ol_qty3
    WHEN 4 THEN @ol_qty4
    WHEN 5 THEN @ol_qty5
    WHEN 6 THEN @ol_qty6
    WHEN 7 THEN @ol_qty7
    WHEN 8 THEN @ol_qty8
    WHEN 9 THEN @ol_qty9
    WHEN 10 THEN @ol_qty10
    WHEN 11 THEN @ol_qty11
    WHEN 12 THEN @ol_qty12
    WHEN 13 THEN @ol_qty13
    WHEN 14 THEN @ol_qty14
    WHEN 15 THEN @ol_qty15
END

```

```

-----  

-- get item data (no one updates item)  

-----  

SELECT @i_price = i_price,  

       @i_name = i_name,  

       @i_data = i_data  

FROM   item WITH (repeatableread)  

WHERE  i_id = @li_id  

-----  

-- update stock values  

-----  

UPDATE stock  

SET   s_ytd = s_ytd + @li_qty,  

     @s_quantity = s_quantity - @li_qty +  

                   CASE WHEN (s_quantity - @li_qty < 10) THEN 91  

ELSE 0 END,  

     s_order_cnt = s_order_cnt + 1,  

     s_remote_cnt = s_remote_cnt +  

                   CASE WHEN (@li_s_w_id = @w_id) THEN 0 ELSE 1  

END,  

     @s_data = s_data,  

     @s_dist = CASE @d_id  

          WHEN 1 THEN s_dist_01  

          WHEN 2 THEN s_dist_02  

          WHEN 3 THEN s_dist_03  

          WHEN 4 THEN s_dist_04  

          WHEN 5 THEN s_dist_05  

          WHEN 6 THEN s_dist_06  

          WHEN 7 THEN s_dist_07  

          WHEN 8 THEN s_dist_08  

          WHEN 9 THEN s_dist_09  

          WHEN 10 THEN s_dist_10  

          END  

WHERE  s_i_id = @li_id AND  

       s_w_id = @li_s_w_id  

-----  

-- if there actually is a stock (and item) with these ids, go to work  

-----  

IF (@@rowcount > 0)
BEGIN  

-----  

-- insert order_line data (using data from item and stock)  

-----  

INSERT INTO order_line VALUES( @o_id,
                               @d_id,
                               @w_id,
                               @li_no,
                               @li_id,
                               'dec 31, 1899',
                               @i_price * @li_qty,
                               @li_s_w_id,
                               @li_qty,
                               @s_dist)  

-----  

-- send line-item data to client

```

```

-----  

SELECT @i_name,
       @s_quantity,
       b_g = CASE WHEN ( (patindex('%ORIGINAL%',@i_data) > 0) AND  

                         (patindex('%ORIGINAL%',@s_data) > 0) )  

                         THEN 'B' ELSE 'G' END,  

       @i_price,
       @i_price * @li_qty
      END
      ELSE
      BEGIN  

-----  

-- no item (or stock) found - triggers rollback condition  

-----  

SELECT '',0,0
SELECT @commit_flag = 0
END
-----  

-- get customer last name, discount, and credit rating  

-----  

SELECT @c_last = c_last,
       @c_discount = c_discount,
       @c_credit = c_credit,
       @c_id_local = c_id
FROM   customer WITH (repeatableread)
WHERE  c_id = @c_id AND
       c_w_id = @w_id AND
       c_d_id = @d_id  

-----  

-- insert fresh row into orders table  

-----  

INSERT INTO orders VALUES ( @o_id,
                            @d_id,
                            @w_id,
                            @c_id_local,
                            0,
                            @o.ol_cnt,
                            @o.all_local,
                            @o_entry_d)  

-----  

-- insert corresponding row into new_order table  

-----  

INSERT INTO new_order VALUES ( @o_id,
                               @d_id,
                               @w_id)  

-----  

-- select warehouse tax  

-----  

SELECT @w_tax = w_tax
FROM   warehouse WITH (repeatableread)
WHERE  w_id = @w_id  

IF (@commit_flag = 1)

```

```

        COMMIT TRANSACTION n
    ELSE
-----
-- all that work for nuthin!!!
-----
        ROLLBACK TRANSACTION n
-----
-- return order data to client
-----
        SELECT  @w_tax,
                @d_tax,
                @o_id,
                @c_last,
                @c_discount,
                @c_credit,
                @o_entry_d,
                @commit_flag
END
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

tpcc_neworder_new.sql

```

-- File: TPCC_NEWORDER_NEW.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- This acid stored procedure implements the neworder
-- transaction. It outputs timestamps at the
-- beginning of the transaction, before the commit
-- delay, and after the commit.
--

SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS OFF
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder_new' )
    DROP PROCEDURE tpcc_neworder_new
GO

-- neworder_new v2.5 6/23/05 PeterCa
-- 1q stock/order_line/client. upd district & ins neworder.
-- cust/warehouse select together, ins order separate
-- uses rownumber to distinct w any transform

```

```

-- uses in-memory sort for distinct on iid,wid
-- uses charindex
-- will rollback if (@i_idx,@s_w_idx pairs not unique) OR (@i_idx not unique).

CREATE PROCEDURE tpcc_neworder_new
    @w_id          int,
    @d_id          tinyint,
    @o_id          int,
    @o.ol_cnt     tinyint,
    @o.all_local   tinyint,
    @i_id1         int = 0, @s_w_id1  int = 0, @ol_qty1 smallint = 0,
    @i_id2         int = 0, @s_w_id2  int = 0, @ol_qty2 smallint = 0,
    @i_id3         int = 0, @s_w_id3  int = 0, @ol_qty3 smallint = 0,
    @i_id4         int = 0, @s_w_id4  int = 0, @ol_qty4 smallint = 0,
    @i_id5         int = 0, @s_w_id5  int = 0, @ol_qty5 smallint = 0,
    @i_id6         int = 0, @s_w_id6  int = 0, @ol_qty6 smallint = 0,
    @i_id7         int = 0, @s_w_id7  int = 0, @ol_qty7 smallint = 0,
    @i_id8         int = 0, @s_w_id8  int = 0, @ol_qty8 smallint = 0,
    @i_id9         int = 0, @s_w_id9  int = 0, @ol_qty9 smallint = 0,
    @i_id10        int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i_id11        int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i_id12        int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
    @i_id13        int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
    @i_id14        int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
    @i_id15        int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

```

```

AS
BEGIN
DECLARE @o_id          int,
        @d_tax          smallmoney,
        @o_entry_d      datetime,
        @commit_flag    tinyint

BEGIN TRANSACTION n
    -- get district tax and next available order id and update
    -- insert corresponding row into new-order table
    -- plus initialize local variables

    UPDATE district
    SET    @d_tax       = d_tax,
           @o_id        = d_next_o_id,
           d_next_o_id  = d_next_o_id + 1,
           @o_entry_d   = GETDATE(),
           @commit_flag = 1
    OUTPUT deleted.d_next_o_id,
           @d_id,
           @w_id

    INTO new_order
    WHERE d_w_id       = @w_id AND
          d_id        = @d_id

    -- update stock from stock join (item join (params))
    -- output to orderline, output to client
    -- NOTE: @@rowcount != @ol_o_cnt
    --       if (@i_idx,@s_w_idx pairs not unique) OR (@i_idx not unique).

    UPDATE stock

```

```

SET      s_ytd      = s_ytd + info.ol_qty,
        s_quantity = s_quantity - info.ol_qty +
                      CASE WHEN (s_quantity - info.ol_qty < 10) THEN 91 ELSE
0 END,
        s_order_cnt = s_order_cnt + 1,
        s_remote_cnt = s_remote_cnt +
                      CASE WHEN (info.w_id = @w_id) THEN 0
ELSE 1 END

OUTPUT  @o_id,
        @d_id,
        @w_id,
        info.lino,
        info.i_id,
        "dec 31, 1899",
        info.i_price * info.ol_qty,
        info.w_id,
        info.ol_qty,
CASE    @d_id WHEN 1 THEN inserted.s_dist_01
        WHEN 2 THEN inserted.s_dist_02
        WHEN 3 THEN inserted.s_dist_03
        WHEN 4 THEN inserted.s_dist_04
        WHEN 5 THEN inserted.s_dist_05
        WHEN 6 THEN inserted.s_dist_06
        WHEN 7 THEN inserted.s_dist_07
        WHEN 8 THEN inserted.s_dist_08
        WHEN 9 THEN inserted.s_dist_09
        WHEN 10 THEN inserted.s_dist_10
END
INTO   order_line

OUTPUT  info.i_name,inserted.s_quantity,
CASE WHEN ((charindex("ORIGINAL",info.i_data) > 0) AND
           (charindex("ORIGINAL",inserted.s_data) > 0) )
      THEN "B" ELSE "G" END,
        info.i_price,
        info.i_price*info.ol_qty
FROM   stock INNER JOIN
       (SELECT iid,
              wid,
              lino,
              ol_qty,
              i_price,
              i_name,
              i_data
       FROM   (SELECT iid,
                     wid,
                     lino,
                     qty,
                     row_number() OVER (PARTITION BY iid,wid
ORDER BY iid,wid)
       FROM   (SELECT @i_id1,@s_w_id1,1,@ol_qty1      UNION ALL
              SELECT @i_id2,@s_w_id2,2,@ol_qty2      UNION ALL
              SELECT @i_id3,@s_w_id3,3,@ol_qty3      UNION ALL
              SELECT @i_id4,@s_w_id4,4,@ol_qty4      UNION ALL
              SELECT @i_id5,@s_w_id5,5,@ol_qty5      UNION ALL
              SELECT @i_id6,@s_w_id6,6,@ol_qty6      UNION ALL
              SELECT @i_id7,@s_w_id7,7,@ol_qty7      UNION ALL

```

```

SELECT @i_id8,@s_w_id8,8,@ol_qty8      UNION ALL
SELECT @i_id9,@s_w_id9,9,@ol_qty9      UNION ALL
SELECT @i_id10,@s_w_id10,10,@ol_qty10     UNION ALL
SELECT @i_id11,@s_w_id11,11,@ol_qty11     UNION ALL
SELECT @i_id12,@s_w_id12,12,@ol_qty12     UNION ALL
SELECT @i_id13,@s_w_id13,13,@ol_qty13     UNION ALL
SELECT @i_id14,@s_w_id14,14,@ol_qty14     UNION ALL
SELECT @i_id15,@s_w_id15,15,@ol_qty15) AS
uol(iid,wid,lino,qty)
) AS ol(iid,wid,lino,ol_qty,rownum)
INNER JOIN
item (repeatableread) ON i_id = iid AND -- filters
out invalid items
                                              rownum = 1
) AS info(i_id,w_id,lino,ol_qty,i_price,i_name,i_data)
ON s_i_id = info.i_id AND
s_w_id = info.w_id

IF (@@rowcount <> @o_qty) -- must have an invalid item
SELECT @commit_flag = 0 -- 2.4.2.3 requires rest to proceed

-- insert fresh row into orders table
INSERT INTO orders VALUES ( @o_id,
                            @d_id,
                            @w_id,
                            @c_id,
                            0,
                            @o_qty,
                            @o_all_local,
                            @o_entry_d)

-- get customer last name, discount, and credit rating
-- get warehouse tax
-- return order_data to client
SELECT w_tax,
       @d_tax,
       @o_id,
       c_last,
       c_discount,
       c_credit,
       @o_entry_d,
       @commit_flag
FROM   warehouse(repeatableread),
       customer(repeatableread)
WHERE  w_id = @w_id AND
       c_id = @c_id AND
       c_w_id = @w_id AND
       c_d_id = @d_id

-- @@rowcount checks that previous select found a valid customer
IF (@@rowcount = 0)
BEGIN
      RAISERROR( 'Invalid Customer ID', 11, 1 )
      ROLLBACK TRANSACTION n
END
      ELSE IF (@commit_flag = 1)
      COMMIT TRANSACTION n
      ELSE -- all that work for nothing.

```

```

ROLLBACK TRANSACTION n
END
GO

```

delivery.sql

```

-- File: DELIVERY.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates delivery stored procedure
-- Interface Level: 4.20.000
-- 

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO

CREATE PROC tpcc_delivery
    @w_id      int,
    @o_carrier_id smallint

AS
DECLARE @d_id      tinyint,
        @o_id      int,
        @c_id      int,
        @total     money,
        @oid1      int,
        @oid2      int,
        @oid3      int,
        @oid4      int,
        @oid5      int,
        @oid6      int,
        @oid7      int,
        @oid8      int,
        @oid9      int,
        @oid10     int

SELECT @d_id = 0
BEGIN TRANSACTION d
    WHILE (@d_id < 10)

```

```

        BEGIN
            SELECT @d_id = @d_id + 1,
                   @total = 0,
                   @o_id = 0

            SELECT TOP 1
                   @o_id = no_o_id
            FROM new_order WITH (serializable updlock)
            WHERE no_w_id = @w_id AND
                  no_d_id = @d_id
            ORDER BY no_o_id ASC

            IF (@@rowcount <> 0)
                BEGIN
                    -- claim the order for this district
                    DELETE new_order
                    WHERE no_w_id = @w_id AND
                          no_d_id = @d_id AND
                          no_o_id = @o_id

                    -- set carrier_id on this order (and get customer id)
                    UPDATE orders
                    SET o_carrier_id = @o_carrier_id,
                        @c_id = o_c_id
                    WHERE o_w_id = @w_id AND
                          o_d_id = @d_id AND
                          o_id = @o_id

                    -- set date in all lineitems for this order (and sum amounts)
                    UPDATE order_line
                    SET ol_delivery_d = GETDATE(),
                        @total = @total + ol_amount
                    WHERE ol_w_id = @w_id AND
                          ol_d_id = @d_id AND
                          ol_o_id = @o_id

                    -- accumulate lineitem amounts for this order into customer
                    UPDATE customer
                    SET c_balance = c_balance + @total,
                        c_delivery_cnt = c_delivery_cnt + 1
                    WHERE c_w_id = @w_id AND
                          c_d_id = @d_id AND
                          c_id = @c_id
                END
            END

            SELECT @oid1 = CASE @d_id WHEN 1 THEN @o_id ELSE @oid1 END,
                   @oid2 = CASE @d_id WHEN 2 THEN @o_id ELSE @oid2 END,
                   @oid3 = CASE @d_id WHEN 3 THEN @o_id ELSE @oid3 END,
                   @oid4 = CASE @d_id WHEN 4 THEN @o_id ELSE @oid4 END,
                   @oid5 = CASE @d_id WHEN 5 THEN @o_id ELSE @oid5 END,
                   @oid6 = CASE @d_id WHEN 6 THEN @o_id ELSE @oid6 END,
                   @oid7 = CASE @d_id WHEN 7 THEN @o_id ELSE @oid7 END,
                   @oid8 = CASE @d_id WHEN 8 THEN @o_id ELSE @oid8 END,
                   @oid9 = CASE @d_id WHEN 9 THEN @o_id ELSE @oid9 END,
                   @oid10 = CASE @d_id WHEN 10 THEN @o_id ELSE @oid10 END
        END
    COMMIT TRANSACTION d

```

```

-- return delivery data to client

SELECT @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

null-txns.sql

```

-- File: NULL-TXNS.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- This script will create stored procs which
-- accept the same parameters and return correctly
-- formed results sets to match the standard TPC-C
-- stored procs. Of course, the advantage is that
-- these stored procs place almost no load on
-- SQL Server and do not require a database.
--
-- Interface Level: 4.10.000
--

-----  

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
    DROP PROCEDURE tpcc_payment
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
    DROP PROCEDURE tpcc_stocklevel
GO

```

```

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_version' )
    DROP PROCEDURE tpcc_version
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'order_line_null' )
    DROP PROCEDURE order_line_null
GO

CREATE PROCEDURE tpcc_delivery
    @w_id          int,
    @o_carrier_id smallint
AS
DECLARE @d_id      tinyint,
        @o_id      int,
        @c_id      int,
        @total     numeric(12,2),
        @oid1     int,
        @oid2     int,
        @oid3     int,
        @oid4     int,
        @oid5     int,
        @oid6     int,
        @oid7     int,
        @oid8     int,
        @oid9     int,
        @oid10    int,
        @delaytime varchar(30)

-----  

-- uniform random delay of 0 - 1 second; avg = 0.50
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND())*1.00) AS decimal(4,3)) AS char(5)
WAITFOR delay @delaytime

SELECT 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001
GO

CREATE PROCEDURE tpcc_neworder
    @w_id          int,
    @d_id          tinyint,
    @c_id          int,
    @o.ol_cnt     tinyint,
    @o.all_local  tinyint,
    @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
    @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
    @i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
    @i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
    @i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
    @i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,

```

```

@i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
@i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
@i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
DECLARE @w_tax      numeric(4,4),
        @d_tax      numeric(4,4),
        @c_last     char(16),
        @c_credit   char(2),
        @c_discount numeric(4,4),
        @i_price    numeric(5,2),
        @i_name     char(24),
        @o_entry_d  datetime,
        @li_no      int,
        @o_id       int,
        @commit_flag tinyint,
        @li_id      int,
        @li_qty     smallint,
        @delaytime  varchar(30)

BEGIN
-----  

-- uniform random delay of 0 - 0.6 second; avg = 0.3
-----  

SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.60) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

-----  

-- process orderlines
-----  

SELECT @commit_flag = 1,
       @li_no      = 0

WHILE (@li_no < @o.ol_cnt)
BEGIN
  SELECT @li_id = CASE @li_no
    WHEN 1 THEN @i_id1
    WHEN 2 THEN @i_id2
    WHEN 3 THEN @i_id3
    WHEN 4 THEN @i_id4
    WHEN 5 THEN @i_id5
    WHEN 6 THEN @i_id6
    WHEN 7 THEN @i_id7
    WHEN 8 THEN @i_id8
    WHEN 9 THEN @i_id9
    WHEN 10 THEN @i_id10
    WHEN 11 THEN @i_id11
    WHEN 12 THEN @i_id12
    WHEN 13 THEN @i_id13
    WHEN 14 THEN @i_id14
    WHEN 15 THEN @i_id15
  END
  SELECT @li_no = @li_no + 1

```

```

SELECT @i_price     = 23.45, @li_qty = @li_no
IF (@li_id = 999999)
BEGIN
  SELECT '' ,0 ,'' ,0 ,0
  SELECT @commit_flag = 0
END
ELSE
BEGIN
  SELECT 'Item Name blah',
         17,
         'G',
         @i_price,
         @i_price * @li_qty
END
-----  

-- return order data to client
-----  

SELECT @w_tax      = 0.1234,
       @d_tax      = 0.0987,
       @o_id       = 3001,
       @c_last     = 'BAROUGHTABLE',
       @c_discount = 0.2198,
       @c_credit   = 'GC',
       @o_entry_d  = GETDATE()

SELECT @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag
END
GO

CREATE PROCEDURE tpcc_orderstatus
  @w_id      int,
  @d_id      tinyint,
  @c_id      int,
  @c_last    char(16) = ''

AS
DECLARE @c_balance  numeric(12,2),
        @c_first    char(16),
        @c_middle   char(2),
        @o_id       int,
        @o_entry_d  datetime,
        @o_carrier_id smallint,
        @ol_cnt     smallint,
        @delaytime  varchar(30)
```

```

-----
-- uniform random delay of 0 - 0.2 second; avg = 0.1
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS char(5))

WAITFOR delay @delaytime

SELECT @c_id      = 113,
@c_balance   = -10.00,
@c_first     = '8YCodgytqCj8',
@c_middle    = 'OE',
@c_last      = 'OUGHTTOUGHTABLE',
@o_id        = 3456,
@o_entry_d   = GETDATE(),
@o_carrier_id = 1

SELECT @ol_cnt = (RAND() * 11) + 5

SET ROWCOUNT @ol_cnt

SELECT ol_supply_w_id,
ol_i_id,
ol_quantity,
ol_amount,
ol_delivery_d
FROM order_line_null

SELECT @c_id,
@c_last,
@c_first,
@c_middle,
@o_entry_d,
@o_carrier_id,
@c_balance,
@o_id
GO

CREATE PROCEDURE tpcc_payment
    @w_id      int,
    @c_w_id    int,
    @h_amount  numeric(6,2),
    @d_id      tinyint,
    @c_d_id    tinyint,
    @c_id      int,
    @c_last    char(16) = ''
AS
DECLARE @w_street_1  char(20),
@w_street_2  char(20),
@w_city     char(20),
@w_state    char(2),
@w_zip      char(9),
@w_name     char(10),
@d_street_1 char(20),
@d_street_2 char(20),
@d_city     char(20),
@d_state    char(2),

```

```

@d_zip      char(9),
@d_name    char(10),
@c_first   char(16),
@c_middle  char(2),
@c_street_1 char(20),
@c_street_2 char(20),
@c_city    char(20),
@c_state   char(2),
@c_zip     char(9),
@c_phone   char(16),
@c_since   datetime,
@c_credit  char(2),
@c_credit_lim numeric(12,2),
@c_balance  numeric(12,2),
@c_discount numeric(4,4),
@data      char(500),
@c_data    char(500),
@datetime  datetime,
@w_ytd     numeric(12,2),
@d_ytd     numeric(12,2),
@cnt       smallint,
@val       smallint,
@screen_data char(200),
@d_id_local tinyint,
@w_id_local int,
@c_id_local int,
@delaytime varchar(30)

-----
-- uniform random delay of 0 - 0.3 second; avg = 0.15
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS char(5))

WAITFOR delay @delaytime

SELECT @screen_data = ''

-----
-- get customer info and update balances
-----
SELECT @d_street_1 = 'rqSHHakqyV',
@d_street_2 = 'zZ98nW3BR2s',
@d_city     = 'ArNr4GNFV9',
@d_state    = 'aV',
@d_zip      = '453511111'

-----
-- get warehouse data and update year-to-date
-----
SELECT @w_street_1 = 'rqSHHakqyV',
@w_street_2 = 'zZ98nW3BR2s',
@w_city     = 'ArNr4GNFV9',
@w_state    = 'aV',
@w_zip      = '453511111'

SELECT @c_id      = 123,
@c_balance   = -10000.00,

```

```

@c_first      = 'KmR03Xureb',
@c_middle     = 'OE',
@c_last       = 'BAROUGHTBAR',
@c_street_1   = 'QpGdOhjv8mR9vNI8V',
@c_street_2   = 'dzKoCobBqbC3yu',
@c_city        = 'zAKZXdc037FQxq',
@c_state       = 'QA',
@c_zip         = '700311111',
@c_phone       = '2967264064528555',
@c_credit      = 'GC',
@c_credit_lim = 50000.00,
@c_discount    = 0.3069,
@c_since       = GETDATE(),
@datetime     = GETDATE()

-----
-- return data to client
-----

SELECT @c_id,
@c_last,
@datetime,
@w_street_1,
@w_street_2,
@w_city,
@w_state,
@w_zip,
@d_street_1,
@d_street_2,
@d_city,
@d_state,
@d_zip,
@c_first,
@c_middle,
@c_street_1,
@c_street_2,
@c_city,
@c_state,
@c_zip,
@c_phone,
@c_since,
@c_credit,
@c_credit_lim,
@c_discount,
@c_balance,
@screen_data
GO

CREATE PROCEDURE tpcc_stocklevel
    @w_id          int,
    @d_id          tinyint,
    @threshold     smallint
AS
DECLARE @delaytime varchar(30)

-----
-- uniform random delay of 0 - 3.6 second; avg = 1.8
-----

```

```

SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT 49
GO

CREATE PROCEDURE tpcc_version

AS
DECLARE @version char(8)

BEGIN
    SELECT @version = '4.10.000'

    SELECT @version AS 'Version'
END
GO

CREATE TABLE order_line_null (
    [ol_i_id] [int] NOT NULL ,
    [ol_supply_w_id] [int] NOT NULL ,
    [ol_delivery_d] [datetime] NOT NULL ,
    [ol_quantity] [smallint] NOT NULL ,
    [ol_amount] [numeric](6, 2) NOT NULL
) ON [PRIMARY]
GO

INSERT INTO order_line_null VALUES ( 101, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 102, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 103, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 104, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 105, 1, GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 106, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 107, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 108, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 109, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 110, 1, GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 111, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 112, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 113, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 114, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 115, 1, GETDATE(), 5, 123.45 )
GO

```

ordstat.sql

```

--
-- File: ORDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates order status stored procedure
--
-- Interface Level: 4.20.000
--
```

```

-- --
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO

CREATE PROCEDURE tpcc_orderstatus
    @w_id      int,
    @d_id      tinyint,
    @c_id      int,
    @c_last    char(16) = ''

AS
DECLARE @c_balance money,
        @c_first   char(16),
        @c_middle  char(2),
        @o_id      int,
        @o_entry_d datetime,
        @o_carrier_id smallint,
        @cnt       smallint

BEGIN TRANSACTION o
IF (@c_id = 0)
BEGIN
    -----
    -- get customer id and info using last name
    -----
    SELECT @cnt = (count(*)+1)/2
    FROM customer WITH (repeatableread)
    WHERE c_last = @c_last AND
          c_w_id = @w_id AND
          c_d_id = @d_id

    SET rowcount @cnt

    SELECT @c_id = c_id,
           @c_balance = c_balance,
           @c_first = c_first,
           @c_last = c_last,
           @c_middle = c_middle
    FROM customer WITH (repeatableread)
    WHERE c_last = @c_last AND
          c_w_id = @w_id AND
          c_d_id = @d_id
    ORDER BY c_w_id, c_d_id, c_last, c_first

    SET rowcount 0
END
ELSE
BEGIN
    -----
    -- get customer info if by id
    -----
    SELECT @c_balance = c_balance,
           @c_first = c_first,
           @c_middle = c_middle,
           @c_last = c_last
    FROM customer WITH (repeatableread)
    WHERE c_id = @c_id AND
          c_d_id = @d_id AND
          c_w_id = @w_id

    SELECT @cnt = @@rowcount
END
-----
-- if no such customer
-----
IF (@cnt = 0)
BEGIN
    RAISERROR('Customer not found',18,1)
    GOTO custnotfound
END
-----
-- get order info
-----
SELECT @o_id = o_id,
       @o_entry_d = o_entry_d,
       @o_carrier_id = o_carrier_id
FROM orders WITH (serializable)
WHERE o_c_id = @c_id AND
      o_d_id = @d_id AND
      o_w_id = @w_id
ORDER BY o_id ASC

-----
-- select order lines for the current order
-----
SELECT ol_supply_w_id,
       ol_i_id,
       ol_quantity,
       ol_amount,
       ol_delivery_d
FROM order_line WITH (repeatableread)
WHERE ol_o_id = @o_id AND
      ol_d_id = @d_id AND
      ol_w_id = @w_id

custnotfound:
COMMIT TRANSACTION o
-----
-- return data to client
-----

```

```

SELECT  @c_id,
        @c_last,
        @c_first,
        @c_middle,
        @o_entry_d,
        @o_carrier_id,
        @c_balance,
        @o_id
GO

```

payment.sql

```

-- File: PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates payment stored procedure
-- Interface Level: 4.20.000
-- -----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
    DROP PROCEDURE tpcc_payment
GO

CREATE PROCEDURE tpcc_payment
    @w_id      int,
    @c_w_id    int,
    @h_amount  smallmoney,
    @d_id      tinyint,
    @c_d_id    tinyint,
    @c_id      int,
    @c_last    char(16) = ""

AS
DECLARE @w_street_1    char(20),
        @w_street_2    char(20),
        @w_city       char(20),
        @w_state      char(2),
        @w_zip        char(9),
        @w_name       char(10),
        @d_street_1   char(20),
        @d_street_2   char(20),
        @d_city       char(20),
        @d_state      char(2),
        @d_zip        char(9),

```

```

        @d_name      char(10),
        @c_first     char(16),
        @c_middle    char(2),
        @c_street_1  char(20),
        @c_street_2  char(20),
        @c_city      char(20),
        @c_state     char(2),
        @c_zip       char(9),
        @c_phone     char(16),
        @c_since     datetime,
        @c_credit    char(2),
        @c_credit_lim money,
        @c_balance   money,
        @c_discount  smallmoney,
        @c_data      char(42),
        @datetime    datetime,
        @w_ytd      money,
        @d_ytd      money,
        @cnt        smallint,
        @val        smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local  int,
        @c_id_local  int

SELECT  @screen_data = ""

BEGIN TRANSACTION p
    -- get payment date
    SELECT  @datetime = GETDATE()

    IF (@c_id = 0)
        BEGIN
            -- get customer id and info using last name
            SELECT  @cnt = COUNT(*)
            FROM    customer WITH (repeatableread)
            WHERE   c_last = @c_last AND
                    c_w_id = @c_w_id AND
                    c_d_id = @c_d_id

            SELECT  @val = (@cnt + 1) / 2
            SET    rowcount @val

            SELECT  @c_id = c_id
            FROM    customer WITH (repeatableread)
            WHERE   c_last = @c_last AND
                    c_w_id = @c_w_id AND
                    c_d_id = @c_d_id
            ORDER BY c_last, c_first

            SET    rowcount 0
        END
    -- get customer info and update balances
    UPDATE  customer
    SET    @c_balance = c_balance - @h_amount,

```

```

c_payment_cnt = c_payment_cnt + 1,
c_ytd_payment = c_ytd_payment + @h_amount,
@c_first = c_first,
@c_middle = c_middle,
@c_last = c_last,
@c_street_1 = c_street_1,
@c_street_2 = c_street_2,
@c_city = c_city,
@c_state = c_state,
@c_zip = c_zip,
@c_phone = c_phone,
@c_credit = c_credit,
@c_credit_lim = c_credit_lim,
@c_discount = c_discount,
@c_since = c_since,
@c_id_local = c_id
WHERE c_id = @c_id AND
c_w_id = @c_w_id AND
c_d_id = @c_d_id

-- if customer has bad credit get some more info
IF (@c_credit = "BC")
BEGIN
    -- compute new info
    SELECT @c_data = convert(char(5),@c_id) +
    convert(char(4),@c_d_id) +
    convert(char(5),@c_w_id) +
    convert(char(4),@d_id) +
    convert(char(5),@w_id) +
    convert(char(19),@h_amount)

    -- update customer info
    UPDATE customer
    SET c_data = @c_data + substring(c_data, 1, 458),
        @screen_data = @c_data + substring(c_data, 1, 158)

    WHERE c_id = @c_id AND
        c_w_id = @c_w_id AND
        c_d_id = @c_d_id
END

-- get district data and update year-to-date
UPDATE district
SET d_ytd = d_ytd + @h_amount,
    @d_street_1 = d_street_1,
    @d_street_2 = d_street_2,
    @d_city = d_city,
    @d_state = d_state,
    @d_zip = d_zip,
    @d_name = d_name,
    @d_id_local = d_id
WHERE d_w_id = @w_id AND
    d_id = @d_id

-- get warehouse data and update year-to-date
UPDATE warehouse
SET w_ytd = w_ytd + @h_amount,
    @w_street_1 = w_street_1,

```

```

    @w_street_2 = w_street_2,
    @w_city = w_city,
    @w_state = w_state,
    @w_zip = w_zip,
    @w_name = w_name,
    @w_id_local = w_id
WHERE w_id = @w_id

-- create history record
    INSERT INTO history VALUES (@c_id_local,
        @c_d_id,
        @c_w_id,
        @d_id_local,
        @w_id_local,
        @datetime,
        @h_amount,
        @w_name + ' ' + @d_name)

COMMIT TRANSACTION p

-- return data to client
SELECT @c_id,
    @c_last,
    @datetime,
    @w_street_1,
    @w_street_2,
    @w_city,
    @w_state,
    @w_zip,
    @d_street_1,
    @d_street_2,
    @d_city,
    @d_state,
    @d_zip,
    @c_first,
    @c_middle,
    @c_street_1,
    @c_street_2,
    @c_city,
    @c_state,
    @c_zip,
    @c_phone,
    @c_since,
    @c_credit,
    @c_credit_lim,
    @c_discount,
    @c_balance,
    @screen_data
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

stocklev.sql

```
-- File: STOCKLEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates stock level stored procedure
--
-- Interface Level: 4.20.000
--
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
    DROP PROCEDURE tpcc_stocklevel
GO

CREATE PROCEDURE tpcc_stocklevel
    @w_id          int,
    @d_id          tinyint,
    @threshold     smallint

AS
DECLARE @o_id_low  int,
        @o_id_high int

SELECT @o_id_low  = (d_next_o_id - 20),
       @o_id_high = (d_next_o_id - 1)
FROM   district
WHERE  d_w_id      = @w_id AND
       d_id        = @d_id

SELECT COUNT(DISTINCT(s_i_id))
FROM   stock,
       order_line
WHERE  ol_w_id      = @w_id AND
       ol_d_id      = @d_id AND
       ol_o_id      BETWEEN @o_id_low AND
                         @o_id_high AND
       s_w_id        = ol_w_id AND
       s_i_id        = ol_i_id AND
       s_quantity    < @threshold
OPTION(ORDER GROUP)
GO

SET QUOTED_IDENTIFIER OFF
GO
```

```
SET ANSI_NULLS ON
GO
```

dbopt1.sql

```
-- File: DBOPT1.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Sets database options for load
--

USE master
GO

ALTER DATABASE tpcc SET RECOVERY BULK_LOGGED
GO

EXEC sp_dboption tpcc,'trunc. log on chkpt.',TRUE
GO

ALTER DATABASE tpcc SET TORN_PAGE_DETECTION OFF
GO

ALTER DATABASE tpcc SET PAGE_VERIFY NONE
GO

USE tpcc
GO

CHECKPOINT
GO
```

dbopt2.sql

```
-- File: DBOPT2.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Sets database options after load
--

ALTER DATABASE tpcc SET RECOVERY FULL
GO

USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates',1
```

```

GO

RECONFIGURE WITH OVERRIDE
GO

DECLARE @msg      varchar(50)

-----  

--    OPTIONS FOR SQL SERVER 2000      --
-- Set option values for user-defined indexes --
-----  

SET @msg = ''
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ''
PRINT @msg

EXEC sp_indexoption 'customer',      'DisallowPageLocks',   TRUE
EXEC sp_indexoption 'district',      'DisallowPageLocks',   TRUE
EXEC sp_indexoption 'warehouse',     'DisallowPageLocks',   TRUE
EXEC sp_indexoption 'stock',         'DisallowPageLocks',   TRUE
EXEC sp_indexoption 'order_line',    'DisallowRowLocks',    TRUE
EXEC sp_indexoption 'orders',        'DisallowRowLocks',    TRUE
EXEC sp_indexoption 'new_order',     'DisallowRowLocks',    TRUE
EXEC sp_indexoption 'item',          'DisallowRowLocks',    TRUE
EXEC sp_indexoption 'item',          'DisallowPageLocks',   False
GO

Print ''
Print *****
Print 'Pre-specified Locking Hierarchy:'
Print '  Lockflag = 0 ==> No pre-specified hierarchy'
Print '  Lockflag = 1 ==> Lock at Page-level then Table-level'
Print '  Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '  Lockflag = 3 ==> Lock at Table-level'
Print ''

SELECT name,
       lockflags
  FROM sysindexes
 WHERE object_id('warehouse') = id OR
       object_id('district') = id OR
       object_id('customer') = id OR
       object_id('stock') = id OR
       object_id('orders') = id OR
       object_id('order_line') = id OR
       object_id('history') = id OR
       object_id('new_order') = id OR
       object_id('item') = id
 ORDER BY lockflags asc
GO

sp_configure 'allow updates',0
GO

RECONFIGURE WITH OVERRIDE

```

```

GO

EXEC sp_dboption tpcc,           'auto update statistics', FALSE
EXEC sp_dboption tpcc,           'auto create statistics', FALSE
GO

DECLARE @db_id int,
        @tbl_id int

SET @db_id = DB_ID('tpcc')
SET @tbl_id = OBJECT_ID('tpcc..warehouse')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..district')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..new_order')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..item')
DBCC PINTABLE (@db_id, @tbl_id)
GO

```

version.sql

```

-- File: VERSION.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Extracts current version of SQL Server
-- -----
USE master
GO

SELECT CONVERT(char(20), SERVERPROPERTY('ProductVersion')),
       CONVERT(char(20), SERVERPROPERTY('ProductLevel')),
       CONVERT(char(29), SERVERPROPERTY('Edition'))
GO

SELECT CONVERT(char(30), GETDATE(), 21)
GO

```

RunSQLCfg.sql

```

-- File: RUNSQLCFG.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Sets suggested runtime server configuration
-- parameters
-- 

```

```

-----  

EXEC sp_configure 'show advanced option', 1  

GO  
  

RECONFIGURE WITH OVERRIDE  

GO  
  

--- change this value to approximately the number of connected users  

-----  

EXEC sp_configure 'max worker threads',255  
  

--- increase priority of user threads  

-----  

EXEC sp_configure 'priority boost',1  
  

--- disable automatic checkpointing  

-----  

EXEC sp_configure 'recovery interval',32767  
  

--- change to a mask appropriate for the number of processors on the server  

-----  

EXEC sp_configure 'affinity mask',0xf  
  

--- enable fibers  

-----  

EXEC sp_configure 'lightweight pooling',1  

GO  
  

RECONFIGURE WITH OVERRIDE  

GO

```

VerifyTpccLoad.sql

```

-- File: VerifyTPCCLoad.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--  

--  

SET NOCOUNT ON
PRINT ''
SELECT CONVERT(CHAR(30), GETDATE(), 21)
PRINT ''  

USE tpcc
GO  

IF EXISTS (SELECT name
           FROM sysobjects
          WHERE name = 'TPCC_INFO' AND
                type = 'U')

```

```

DROP TABLE TPCC_INFO
GO
PRINT 'WAREHOUSE TABLE'
SELECT count_big(*)
FROM warehouse
GO  

PRINT 'DISTRICT TABLE = (10 * No of warehouses)'
SELECT count_big(*)
FROM district
GO  

PRINT 'ITEM TABLE = 100,000'
SELECT count_big(*)
FROM item
GO  

PRINT 'CUSTOMER TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM customer
GO  

PRINT 'ORDERS TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM orders
GO  

PRINT 'HISTORY TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM history
GO  

PRINT 'STOCK TABLE = (100,000 * No of warehouses)'
SELECT count_big(*)
FROM stock
GO  

PRINT 'ORDER_LINE TABLE = (300,000 * No of warehouses + some change)'
SELECT count_big(*)
FROM order_line
GO  

PRINT 'NEW_ORDER TABLE = (9000 * No of warehouses)'
SELECT count_big(*)
FROM new_order
GO  

CREATE TABLE TPCC_INFO
(
    INFO_DATE              datetime,
    NUM_WAREHOUSE          bigint,
    WAREHOUSE_TARGET        bigint,
    NUM_DISTRICT            bigint,
    DISTRICT_TARGET         bigint,
    NUM_ITEM                bigint,
    ITEM_TARGET             bigint,
    NUM_CUSTOMER            bigint,
    CUSTOMER_TARGET         bigint,
    NUM_ORDERS              bigint,
    ...
)

```

```

ORDERS_TARGET          bigint,
ORDERS_TARGET_LOW      bigint,
ORDERS_TARGET_HIGH     bigint,
NUM_ORDER_LINE         bigint,
ORDER_LINE_TARGET      bigint,
ORDER_LINE_TARGET_LOW  bigint,
ORDER_LINE_TARGET_HIGH bigint,
NUM_NEW_ORDER          bigint,
NEW_ORDER_TARGET       bigint,
NEW_ORDER_TARGET_LOW   bigint,
NEW_ORDER_TARGET_HIGH  bigint,
NUM_HISTORY            bigint,
HISTORY_TARGET         bigint,
NUM_STOCK              bigint,
STOCK_TARGET           bigint)

GO

DECLARE @NUM_WAREHOUSE          bigint,
        @WAREHOUSE_TARGET      bigint,
        @NUM_DISTRICT          bigint,
        @DISTRICT_TARGET        bigint,
        @NUM_ITEM               bigint,
        @ITEM_TARGET             bigint,
        @NUM_CUSTOMER            bigint,
        @CUSTOMER_TARGET         bigint,
        @NUM_ORDERS              bigint,
        @ORDERS_TARGET           bigint,
        @ORDERS_TARGET_LOW       bigint,
        @ORDERS_TARGET_HIGH      bigint,
        @NUM_ORDER_LINE          bigint,
        @ORDER_LINE_TARGET        bigint,
        @ORDER_LINE_TARGET_LOW   bigint,
        @ORDER_LINE_TARGET_HIGH  bigint,
        @NUM_NEW_ORDER            bigint,
        @NEW_ORDER_TARGET         bigint,
        @NEW_ORDER_TARGET_LOW     bigint,
        @NEW_ORDER_TARGET_HIGH    bigint,
        @NUM_HISTORY              bigint,
        @HISTORY_TARGET            bigint,
        @NUM_STOCK                bigint,
        @STOCK_TARGET              bigint

-- set the local variables prior to inserting them into the TPCC_INFO table
SELECT @NUM_WAREHOUSE      = COUNT_BIG(*)
FROM   warehouse

SELECT @NUM_DISTRICT        = COUNT_BIG(*)
FROM   district

SELECT @NUM_ITEM              = COUNT_BIG(*)
FROM   item

SELECT @NUM_CUSTOMER          = COUNT_BIG(*)
FROM   customer

SELECT @NUM_ORDERS            = COUNT_BIG(*)
FROM   orders

```

```

SELECT @NUM_ORDER_LINE      = COUNT_BIG(*)
FROM   order_line

SELECT @NUM_NEW_ORDER        = COUNT_BIG(*)
FROM   new_order

SELECT @NUM_HISTORY           = COUNT_BIG(*)
FROM   history

SELECT @NUM_STOCK              = COUNT_BIG(*)
FROM   stock

--- now calculate and set the target values
SELECT @WAREHOUSE_TARGET      = @NUM_WAREHOUSE,
       @DISTRICT_TARGET        = @NUM_WAREHOUSE * 10,
       @ITEM_TARGET              = 100000,
       @CUSTOMER_TARGET          = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET             = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET_LOW         = @ORDERS_TARGET - FLOOR(@ORDERS_TARGET * .01),
       @ORDERS_TARGET_HIGH        = @ORDERS_TARGET + FLOOR(@ORDERS_TARGET * .01),
       @ORDER_LINE_TARGET          = @NUM_WAREHOUSE * 300000,
       @ORDER_LINE_TARGET_LOW     = @ORDER_LINE_TARGET - FLOOR(@ORDER_LINE_TARGET * .01),
       @ORDER_LINE_TARGET_HIGH    = @ORDER_LINE_TARGET + FLOOR(@ORDER_LINE_TARGET * .01),
       @NEW_ORDER_TARGET           = @NUM_WAREHOUSE * 9000,
       @NEW_ORDER_TARGET_LOW       = @NEW_ORDER_TARGET - FLOOR(@NEW_ORDER_TARGET * .01),
       @NEW_ORDER_TARGET_HIGH      = @NEW_ORDER_TARGET + FLOOR(@NEW_ORDER_TARGET * .01),
       @HISTORY_TARGET              = @NUM_WAREHOUSE * 30000,
       @STOCK_TARGET                = @NUM_WAREHOUSE * 100000

--- insert the values into TPCC_INFO
INSERT INTO TPCC_INFO VALUES
  (GETDATE(),
   @NUM_WAREHOUSE,
   @WAREHOUSE_TARGET,
   @NUM_DISTRICT,
   @DISTRICT_TARGET,
   @NUM_ITEM,
   @ITEM_TARGET,
   @NUM_CUSTOMER,
   @CUSTOMER_TARGET,
   @NUM_ORDERS,
   @ORDERS_TARGET,
   @ORDERS_TARGET_LOW,
   @ORDERS_TARGET_HIGH,
   @NUM_ORDER_LINE,
   @ORDER_LINE_TARGET,
   @ORDER_LINE_TARGET_LOW,
   @ORDER_LINE_TARGET_HIGH,
   @NUM_NEW_ORDER,
   @NEW_ORDER_TARGET,
   @NEW_ORDER_TARGET_LOW,
   @NEW_ORDER_TARGET_HIGH,
   @NUM_HISTORY,
   @HISTORY_TARGET,
   @NUM_STOCK,

```

```

@STOCK_TARGET)
GO

--- output the row counts from the build
PRINT ''
PRINT '-----'
PRINT '| WAREHOUSE TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_WAREHOUSE AS 'Warehouse Rows',
    WAREHOUSE_TARGET AS 'Warehouse Target',
    CASE WHEN (NUM_WAREHOUSE = WAREHOUSE_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!'
    END AS 'Warehouse Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| DISTRICT TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_DISTRICT AS 'District Rows',
    DISTRICT_TARGET AS 'District Target',
    CASE WHEN (NUM_DISTRICT = DISTRICT_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!'
    END AS 'District Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ITEM TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_ITEM AS 'Item Rows',
    ITEM_TARGET AS 'Item Target',
    CASE WHEN (NUM_ITEM = ITEM_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!'
    END AS 'Item Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| CUSTOMER TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_CUSTOMER AS 'Customer Rows',
    CUSTOMER_TARGET AS 'Customer Target',
    CASE WHEN (NUM_CUSTOMER = CUSTOMER_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!'
    END AS 'Customer Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDERS TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_ORDERS AS 'Orders Rows',
    ORDERS_TARGET AS 'Orders Target',
    CASE WHEN (NUM_ORDERS = ORDERS_TARGET)
        THEN 'OK!'
        WHEN (NUM_ORDERS BETWEEN ORDERS_TARGET_LOW AND ORDERS_TARGET_HIGH)
            THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!'
    END AS 'Orders Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDER LINE TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_ORDER_LINE AS 'Order Line Rows',
    ORDER_LINE_TARGET AS 'Order Line Target',
    CASE WHEN (NUM_ORDER_LINE = ORDER_LINE_TARGET)
        THEN 'OK!'
        WHEN (NUM_ORDER_LINE BETWEEN ORDER_LINE_TARGET_LOW AND
ORDER_LINE_TARGET_HIGH)
            THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!'
    END AS 'Order Line Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| NEW ORDER TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_NEW_ORDER AS 'New Order Rows',
    NEW_ORDER_TARGET AS 'New Order Target',
    CASE WHEN (NUM_NEW_ORDER = NEW_ORDER_TARGET)
        THEN 'OK!'

```

```

        WHEN (NUM_NEW_ORDER BETWEEN NEW_ORDER_TARGET_LOW AND
NEW_ORDER_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!!'
    END
    AS 'New Order Message'
FROM   TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '|      HISTORY TABLE      |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21)  AS 'Date',
NUM_HISTORY                   AS 'History Rows',
HISTORY_TARGET                 AS 'History Target',
CASE WHEN (NUM_HISTORY = HISTORY_TARGET)
      THEN 'OK!'
      ELSE 'ERROR!!!!'
    END
    AS 'History Message'
FROM   TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '|      STOCK TABLE      |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21)  AS 'Date',
NUM_STOCK                      AS 'Stock Rows',
STOCK_TARGET                    AS 'Stock Target',
CASE WHEN (NUM_STOCK = STOCK_TARGET)
      THEN 'OK!'
      ELSE 'ERROR!!!!'
    END
    AS 'Stock Message'
FROM   TPCC_INFO
GO

-----
-- Check Indexes
-----

USE tpcc
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '|      TPC-C INDEXES      |'
PRINT '-----'
EXEC sp_helpindex  warehouse
EXEC sp_helpindex  district
EXEC sp_helpindex  item
EXEC sp_helpindex  customer
EXEC sp_helpindex  orders
EXEC sp_helpindex  order_line
EXEC sp_helpindex  new_order

```

```

EXEC  sp_helpindex  history
EXEC  sp_helpindex  stock
GO

```

sqlshutdown.sql

```

-- File: SQLSHUTDOWN.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Checkpoints tpcc database and issues a shutdown
--

USE tpcc
GO

CHECKPOINT
GO

SHUTDOWN
GO

```

getargs.c

```

// File:          GETARGS.C
//                                     Microsoft TPC-C Kit Ver. 4.51
//                                     Copyright Microsoft, 1996, 1997, 1998, 1999,
//                                     2000, 2001, 2002, 2003
//                                     Purpose: Source file for command line processing

// Includes
#include "tpcc.h"

//=====================================================================
//
// Function name: GetArgsLoader
//
//=====================================================================

void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{
    int             i;
    char  *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int)GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server           = SERVER;
    pargs->user              = USER;
    pargs->password          = PASSWORD;
    pargs->database          = DATABASE;

```

```

pargs->batch = BATCH;
pargs->num_warehouses = UNDEF;
    pargs->tables_all = TRUE;
    pargs->table_item = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer = FALSE;
    pargs->table_orders = FALSE;
    pargs->loader_res_file = LOADER_RES_FILE;
    pargs->log_path = LOADER_LOG_PATH;
    pargs->pack_size = DEFLDPACKSIZE;
pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
pargs->build_index = BUILD_INDEX;
pargs->index_order = INDEX_ORDER;
pargs->index_script_path = INDEX_SCRIPT_PATH;
pargs->scale_down = SCALE_DOWN;

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for ( i = 1; i < argc; ++i )
{
    if ( argv[i][0] != '-' && argv[i][0] != '/' )
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];

    switch (ptr[1])
    {
        case '?': /* Fall through */
            GetArgsLoaderUsage();
            break;

        case 'D':
            pargs->database = ptr+2;
            break;

        case 'P':
            pargs->password = ptr+2;
            break;

        case 'S':
            pargs->server = ptr+2;
            break;

        case 'U':
            pargs->user = ptr+2;
            break;

        case 'b':
            pargs->batch = atol(ptr+2);
            break;

        case 'W':
    }
}

pargs->num_warehouses = atol(ptr+2);
break;

case 's':
pargs->starting_warehouse = atol(ptr+2);
break;

case 't':
{
    pargs->tables_all = FALSE;
    if (strcmp(ptr+2,"item") == 0)
        pargs->table_item =
    else if (strcmp(ptr+2,"warehouse"))
        pargs->table_warehouse =
    else if (strcmp(ptr+2,"customer"))
        pargs->table_customer =
    else if (strcmp(ptr+2,"orders"))
        pargs->table_orders =
    else
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }
}
break;

case 'f':
pargs->loader_res_file = ptr+2;
break;

case 'L':
pargs->log_path = ptr+2;
break;

case 'p':
pargs->pack_size = atol(ptr+2);
break;

case 'i':
pargs->build_index = atol(ptr+2);
break;

case 'o':
pargs->index_order = atol(ptr+2);
break;

case 'c':
pargs->scale_down = atol(ptr+2);
break;
}

```

```

        case 'd':
            pargs->index_script_path = ptr+2;
            break;

        default:
            GetArgsLoaderUsage();
            exit(-1);
            break;
    }

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
    printf("Number of Warehouses is required\n");
    exit(-2);
}

return;
}

//=====
// Function name: GetArgsLoaderUsage
//=====
void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

    printf("TPCCCLDR:\n");
    printf("Parameter                               Default\n");
    printf("\n");
    printf("-W Number of Warehouses to Load          Required\n");
    printf("-S Server                                %s\n", SERVER);
    printf("-U Username                               %s\n", USER);
    printf("-P Password                               %s\n", PASSWORD);
    printf("-D Database                               %s\n", DATABASE);
    printf("-b Batch Size                            %ld\n", BATCH);
    printf("-p TDS packet size                      %ld\n", DEF_LDPACKSIZE);
    printf("-L Loader BCP Log Path                  %s\n", LOADER_LOG_PATH);
    printf("-f Loader Results Output Filename       %s\n", LOADER_RES_FILE);
    printf("-s Starting Warehouse                   %ld\n", DEF_STARTING_WAREHOUSE);
    printf("-i Build Option (data = 0, data and index = 1) %ld\n", BUILD_INDEX);
}

```

```

        printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n",
(long) INDEX_ORDER);
        printf("-c Build Scaled Database (normal = 0, tiny = 1)      %ld\n",
(long) SCALE_DOWN);
        printf("-d Index Script Path                                     %s\n",
INDEX_SCRIPT_PATH);
        printf("-t Table to Load                                       all tables
\n");
        printf("  [item|warehouse|customer|orders]\n");
        printf("  Notes: \n");
        printf("    - the '-t' parameter may be included multiple times to \n");
        printf("      specify multiple tables to be loaded \n");
        printf("    - 'item' loads ITEM table \n");
        printf("    - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n");
        printf("    - 'customer' loads CUSTOMER and HISTORY tables \n");
        printf("    - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \n");
        printf("\nNote: Command line switches are case sensitive.\n");

exit(0);
}

```

random.c

```

// File:           RANDOM.C
//                 Microsoft TPC-C Kit Ver. 4.62
//                 Copyright Microsoft, 1996, 1997, 1998, 1999,
//                 2000, 2001, 2002, 2005
//                 Purpose: Random number generation routines for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A          16807
#define M          2147483647
#define Q          127773    /* M div A */
#define R          2836     /* M mod A */
#define Thread     __declspec(thread)

// Globals
long   Thread Seed = 0;    /* thread local seed */

***** *
* random -
* Implements a GOOD pseudo random number generator. This generator
* will/should? run the complete period before repeating.
*
* Copied from:
*   Random Numbers Generators: Good Ones Are Hard to Find.
*   Communications of the ACM - October 1988 Volume 31 Number 10
*

```

```

* Machine Dependencies:
*     long must be 2 ^ 31 - 1 or greater.
*
*****/
```

```

/* seed - load the Seed value used in irand and drand. Should be used before
 * first call to irand or drand.
*****/
```

```

void seed(long val)
{
    #ifdef DEBUG
        printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
        printf("Old Seed %ld New Seed %ld\n", Seed, val);
    #endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}
```

```

/*
* irand - returns a 32 bit integer pseudo random number with a period of
*         1 to 2 ^ 32 - 1.
*
* parameters:
*     none.
*
* returns:
*     32 bit integer - defined as long ( see above ).
*
* side effects:
*     seed get recomputed.
*****/
```

```

long irand()
{
    register long s;      /* copy of seed */
    register long test;   /* test flag */
    register long hi;     /* tmp value for speed */
    register long lo;     /* tmp value for speed */

    #ifdef DEBUG
        printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
    #endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )
```

```

        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

/*
* drand - returns a double pseudo random number between 0.0 and 1.0.
*          See irand.
*****/
```

```

double drand()
{
    #ifdef DEBUG
        printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
    #endif

    return( (double)irand() / 2147483647.0 );
}

//=====
// Function : RandomNumber
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

    #ifdef DEBUG
        printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
    #endif

    if ( upper == lower )           /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96
perf enhancement */

    #ifdef DEBUG
        printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
               (int) GetCurrentThreadId(), lower, upper,
               rand_num);
    #endif

    return rand_num;
}
```

```

#ifndef 0
//Orginal code pgd 08/13/96
long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper - lower :
upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld == %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

    return rand_num;
}
#endif

//=====================================================================
// Function      : NURand
//
// Description:
//=====================================================================
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int) GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1))+x;

#ifdef DEBUG
    printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(), rand_num);
#endif

    return rand_num;
}

```

}

strings.c

```

//      File:          STRINGS.C
//                                         Microsoft TPC-C Kit Ver. 4.51
//                                         Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003
//      Purpose:  Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====================================================================
// Function name: MakeAddress
//
//=====================================================================
void MakeAddress(char *street_1,
                 char *street_2,
                 char *city,
                 char *state,
                 char *zip)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString (2, 2, STATE_LEN, state);
    MakeZipNumberString(9, 9, ZIP_LEN, zip);

#ifdef DEBUG
    printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state: %s,
zip: %s\n",
           (int) GetCurrentThreadId(), street_1, street_2, city,
state, zip);
#endif

    return;
}

//=====================================================================
// Function name: LastName
//
//=====================================================================

```

```

//=====
void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT" , "ABLE" , "PRI" , "PRES",
        "ESE" , "ANTI" , "CALLY" , "ATION" , "EING"
    };

#ifndef DEBUG
    printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
        exit(-1);
    }

#ifndef DEBUG
    printf("[%ld]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
           (int) GetCurrentThreadId(), num, num/100, (num/10)%10,
           num%10);
    printf("[%ld]DBG: LastName: String = %s\n", (int) GetCurrentThreadId(),
           name);
#endif

    return;
}

//=====
// Function name: MakeAlphaString
//=====

//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]

```

```

//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
// -CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifndef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    str[len] = 0;

    return len;
}

int MakeAlphaStringPadded( int minLen, int maxLen, int padLen, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifndef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaStringPadded()\n", (int)
GetCurrentThreadId());
#endif

    len= RandomNumber(minLen, maxLen);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    if (len < padLen)
        memset(str+len, ' ', padLen - len);
    str[padLen] = 0;

    return padLen;
}

//=====
// 

```

```

// Function name: MakeOriginalAlphaString
// =====
int MakeOriginalAlphaString(int x,
                           int y,
                           int z,
                           char *str,
                           int percent)
{
    int len;
    int val;
    int start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)GetCurrentThreadId());
#endif

    // verify prercentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOrigianlAlphaString: Invalid percentage: %d\n",
               percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if (x < 8)
    {
        printf("MakeOriginalAlphaString: string length must be >= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
           (int) GetCurrentThreadId(), str);
#endif

    return len;
}

// =====
// Function name: MakeNumberString
// =====

```

```

//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16, 16,
    string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

//=====
// Function name: MakeZipNumberString
// =====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9, 9,
    string)

    strcpy(str, "00001111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
// Function name: InitString
// =====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

```

```

//=====
// Function name: InitAddress
//
// Description:
//
//=====

void InitAddress(char *street_1, char *street_2, char *city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

//=====
// Function name: PaddString
//
//=====

void PaddString(int max, char *name)
{
    int len;

    len = strlen(name);
    if (len < max)
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

time.c

```

// File:          TIME.C
//               Microsoft TPC-C Kit Ver. 4.62
//               Copyright Microsoft, 1996, 1997, 1998, 1999,
//               2000, 2001, 2002, 2003, 2005
// Purpose:       Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

```

```

//=====
// Function name: TimeNow
//
//=====

long TimeNow()
{
    long time_now;
    struct _timeb el_time;

#ifndef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

tpcc.h

```

// File:          TPCC.H
//               Microsoft TPC-C Kit Ver. 4.51
//               Copyright Microsoft, 1996, 1997, 1998, 1999,
//               2000, 2001, 2002, 2003, 2005
// Purpose:       Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.51"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>
#include <math.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

```

```

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"
#define USER "sa"
#define PASSWORD ""

// Default loader arguments
#define BATCH 10000
#define DEFLDPACKSIZE 32768
#define LOADER_RES_FILE "C:\\MSTPCC.450\\SETUP\\LOGS\\load.out"
#define LOADER_LOG_PATH "C:\\MSTPCC.450\\SETUP\\LOGS\\"
#define LOADER_NURAND_C 123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX 1 // build both
data and indexes
#define INDEX_ORDER 1 // build
indexes before load
#define SCALE_DOWN 0 // build a normal
scale database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all;
    // set if loading all tables
    BOOL table_item;
    // set if loading ITEM table specifically
    BOOL table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL table_customer; // set if
set if loading CUSTOMER and HISTORY
    BOOL table_orders; // set if
set if loading NEW-ORDER, ORDERS, ORDER-LINE
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    *loader_res_file;
    *log_path;
    *synch_servername;
    case_sensitivity;
    starting_warehouse;
    build_index;
    index_order;
}

```

```

long scale_down;
char *index_script_path;
} TPCCLDR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeAlphaStringPadded();

```

```

int    MakeOriginalAlphaString();
int    MakeNumberString();
int    MakeZipNumberString();
void   InitString();
void   InitAddress();
void   PaddString();

```

tpccldr.c

```

===== File: TPCCLDR.C =====
// Microsoft TPC-C Kit Ver. 4.51
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2003
// Purpose: Source file for TPC-C database loader
=====

// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS           100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4
#define MAX_SQL_ERRORS      10

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);
long NURand();
void LoadItem();
void LoadWarehouse();
void Stock();
void District();
void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();
void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void CheckForCommit_Big();
void OpenConnections();
void BuildIndex();
void FormatDate ();

```

```

// Shared memory structures
typedef struct
{
    double          ol;
    long            ol_i_id;
    long            ol_supply_w_id;
    short           ol_quantity;
    double          ol_amount;
    char            ol_dist_info[DIST_INFO_LEN+1];
    char            ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long            o_id;
    short           o_d_id;
    long            o_w_id;
    long            o_c_id;
    short           o_carrier_id;
    short           o.ol_cnt;
    short           o.all_local;
    ORDER_LINE_STRUCT o.ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long            c_id;
    short           c_d_id;
    long            c_w_id;
    char            c_first[FIRST_NAME_LEN+1];
    char            c_middle[MIDDLE_NAME_LEN+1];
    char            c_last[LAST_NAME_LEN+1];
    char            c_street_1[ADDRESS_LEN+1];
    char            c_street_2[ADDRESS_LEN+1];
    char            c_city[ADDRESS_LEN+1];
    char            c_state[STATE_LEN+1];
    char            c_zip[ZIP_LEN+1];
    char            c_phone[PHONE_LEN+1];
    char            c_credit[CREDIT_LEN+1];
    double          c_credit_lim;
    double          c_discount;
    double          c_balance[6];
    double          c_ytd_payment;
    short           c_payment_cnt;
    short           c_delivery_cnt;
    char            c_data[C_DATA_LEN+1];
    double          h_amount;
    h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char            c_last[LAST_NAME_LEN+1];
    char            c_first[FIRST_NAME_LEN+1];
    char            c_id;
    long            c_id;
} CUSTOMER_SORT_STRUCT;

```

```

typedef struct
{
    long           time_start;
} LOADER_TIME_STRUCT;

// Global variables
char      szLastError[300];

HENV      henv;                                // for SQL

HDBC      v_hdbc;                             // for SQL
Server version verification
HDBC      i_hdbc1;                            // for ITEM table
HDBC      w_hdbc1;                            // for WAREHOUSE,
DISTRICT, STOCK
HDBC      c_hdbc1;                            // for CUSTOMER
HDBC      c_hdbc2;                            // for HISTORY
HDBC      o_hdbc1;                            // for ORDERS
HDBC      o_hdbc2;                            // for NEW-ORDER

HDBC      o_hdbc3;                            // for ORDER-LINE

HSTMT     v_hstmt;                           // for SQL Server
version verification
HSTMT     i_hstmt1;
HSTMT     w_hstmt1;
HSTMT     c_hstmt1, c_hstmt2;
HSTMT     o_hstmt1, o_hstmt2, o_hstmt3;

int       total_db_errors;

ORDERS_STRUCT   orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long          orders_rows_loaded;
double        new_order_rows_loaded;
double        order_line_rows_loaded;
long          history_rows_loaded;
long          customer_rows_loaded;
double        stock_rows_loaded;
long          district_rows_loaded;
long          item_rows_loaded;
long          warehouse_rows_loaded;
long          main_time_start;
long          main_time_end;
long          max_items;
long          customers_per_district;
long          orders_per_district;
long          first_new_order;
long          last_new_order;

TPCCLDR_ARGS   *aptr, args;
//=====================================================================
// Function name: main
//

```

```

//=====================================================================
int main(int argc, char **argv)
{
    DWORD          dwThreadID[MAX_MAIN_THREADS];
    HANDLE         hThread[MAX_MAIN_THREADS];
    FILE          *fLoader;
    char          buffer[255];
    int           i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****\n");
    printf("  Microsoft SQL Server\n");
    printf("  TPC-C BENCHMARK KIT: Database loader\n");
    printf("  Version %s\n", TPCKIT_VER);
    printf("\n*****\n");

    // process command line arguments
    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    printf("Build interface is ODBC.\n");
    if (aptr->build_index == 0)
        printf("Data load only - no index creation.\n");
    else
        printf("Data load and index creation.\n");

    if (aptr->index_order == 0)
        printf("Clustered indexes will be created after bulk load.\n");
    else
        printf("Clustered indexes will be created before bulk load.\n");

    // set database scale values
    if (aptr->scale_down == 1)
    {
        printf("**** Scaled Down Database ***\n");
        max_items = MAXITEMS_SCALE_DOWN;
        customers_per_district = CUSTOMERS_SCALE_DOWN;
        orders_per_district = ORDERS_SCALE_DOWN;
        first_new_order = 0;
        last_new_order = 30;
    }
    else
    {
        max_items = MAXITEMS;
        customers_per_district = CUSTOMERS_PER_DISTRICT;
        orders_per_district = ORDERS_PER_DISTRICT;
        first_new_order = 2100;
        last_new_order = 3000;
    }

    // open connections to SQL Server

```

```

OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// start loading data
sprintf(buffer,"TPC-C load started for %ld warehouses.\n",aptr->num_warehouses);
if      (aptr->scale_down == 1)
{
    sprintf(buffer,"SCALED DOWN DATABASE.\n");
}

printf("%s",buffer);
fprintf(fLoader,"%s",buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads
if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting loader threads for: item\n");

    hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadItem,
NULL,
0,
&dwThreadID[0]);
}

if (hThread[0] == NULL)
{
    printf("Error, failed in creating creating thread =
0.\n");
    exit(-1);
}

if (aptr->tables_all || aptr->table_warehouse)
{
    fprintf(fLoader, "Starting loader threads for: warehouse\n");

    hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadWarehouse,
NULL,
0,

```



```

&dwThreadID[1]);

if (hThread[1] == NULL)
{
    printf("Error, failed in creating creating thread =
1.\n");
    exit(-1);
}

if (aptr->tables_all || aptr->table_customer)
{
    fprintf(fLoader, "Starting loader threads for: customer\n");

    hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomer,
NULL,
0,
&dwThreadID[2]);
}

if (hThread[2] == NULL)
{
    printf("Error, failed in creating creating main thread
= 2.\n");
    exit(-1);
}

if (aptr->tables_all || aptr->table_orders)
{
    fprintf(fLoader, "Starting loader threads for: orders\n");

    hThread[3] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrders,
NULL,
0,
&dwThreadID[3]);
}

if (hThread[3] == NULL)
{
    printf("Error, failed in creating creating main thread
= 3.\n");
    exit(-1);
}

// Wait for threads to finish...
for (i=0; i<MAX_MAIN_THREADS; i++)
{

```

```

        if (hThread[i] != NULL)
        {
            WaitForSingleObject( hThread[i], INFINITE );
            CloseHandle(hThread[i]);
            hThread[i] = NULL;
        }
    }

    main_time_end = (TimeNow() / MILLI);

    sprintf(buffer,"nTPC-C load completed successfully in %ld minutes.\n",
            (main_time_end - main_time_start)/60);

    printf("%s",buffer);
    fprintf(fLoader, "%s", buffer);

    fclose(fLoader);

    SQLFreeEnv(henv);

    exit(0);

    return 0;
}

//=====
// Function name: LoadItem
//=====
void LoadItem()
{
    int             i;
    long            i_id;
    long            i_im_id;
    char            i_name[I_NAME_LEN+1];
    double          i_price;
    char            i_data[I_DATA_LEN+1];
    char            name[20];
    long            time_start;
    RETCODE         rc;
    DBINT           rcount;
    char            bcphint[128];
    char            err_log_path[256];

    // Seed with unique number
    seed(11);

    printf("Loading item table...\n");

    //if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitmcl");

    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);

    sprintf(name, "%s..%s", aptr->database, "item");

    strcpy(err_log_path,aptr->log_path);
    strcat(err_log_path,"item.err");
    rc = bcp_init(i_hdbc1, name, NULL, err_log_path , DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (i_id), ROWS_PER_BATCH =
100000");
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
    }

    i = 0;
    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    time_start = (TimeNow() / MILLI);

    item_rows_loaded = 0;

    for (i_id = 1; i_id <= max_items; i_id++)
    {
        i_im_id = RandomNumber(1L, 10000L);

        MakeAlphaStringPadded(14, 24, I_NAME_LEN, i_name);
        i_price = ((float) RandomNumber(100L, 10000L))/100.0;
        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
    }
}

```

```

        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
    }

    rcount = bcp_done(i_hdbc1);
    if (rcnt < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmcl");
}

//=====
// Function : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are created
// =====
void LoadWarehouse()
{
    int             i;
    long            w_id;
    char  w_name[W_NAME_LEN+1];
    char  w_street_1[ADDRESS_LEN+1];
    char  w_street_2[ADDRESS_LEN+1];
    char  w_city[ADDRESS_LEN+1];
    char  w_state[STATE_LEN+1];
    char  w_zip[ZIP_LEN+1];
    double          w_tax;
    double          w_ytd;
    char   name[20];
    long   time_start;
    RETCODE         rc;
    DBINT           rcount;
    char  bcphint[128];
    char   err_log_path[256];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxwarcl");

    InitString(w_name, W_NAME_LEN+1);
    InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);
}

```

```

sprintf(name, "%s..%s", aptr->database, "warehouse");

strcpy(err_log_path,aptr->log_path);
strcat(err_log_path,"whouse.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcpint, "tablock, order (w_id), ROWS_PER_BATCH = %d",
aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcpint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)

```

```

{
    MakeAlphaStringPadded(6,10, W_NAME_LEN, w_name);
    MakeAddress(w_street_1, w_street_2, w_city, w_state, w_zip);
    w_tax = ((float) RandomNumber(0L,2000L))/10000.00;
    w_ytd = 300000.00;

    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded,
"warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxwarcl");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();
}

//=====
// Function : District
//=====
void District()
{
    int          i;
    short         d_id;
    long          d_w_id;
    char          d_name[D_NAME_LEN+1];
    char          d_street_1[ADDRESS_LEN+1];
    char          d_street_2[ADDRESS_LEN+1];
    char          d_city[ADDRESS_LEN+1];
    char          d_state[STATE_LEN+1];
    char          d_zip[ZIP_LEN+1];
    double        d_tax;
    double        d_ytd;
    char          name[20];
    long          d_next_o_id;
    long          time_start;
    long          w_id;
    RETCODE       rc;
}

```

```

DBINT      rcint;
char       bcphint[128];
char       err_log_path[256];

// Seed with unique number
seed(4);

printf("Loading district table...\n");

// build index before load
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxdsc1");

InitString(d_name, D_NAME_LEN+1);
InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
sprintf(name, "%s..%s", aptr->database, "district");

strcpy(err_log_path,aptr->log_path);
strcat(err_log_path,"district.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (d_w_id, d_id), ROWS_PER_BATCH
= %u", (aptr->num_warehouses * 10));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);

```

```

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

d_ytd = 30000.0;

d_next_o_id = orders_per_district+1;

time_start = (TimeNow() / MILLI);

for (w_id = aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    d_w_id = w_id;

    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        MakeAlphaStringPadded(6,10,D_NAME_LEN, d_name);

        MakeAddress(d_street_1, d_street_2, d_city, d_state,
d_zip);

        d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstml1,
district_rows_loaded, "district", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading district table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxdisc1");
}

return;
}

```

```

//=====
// Function  : Stock
//=====
void Stock()
{
    int i;
    long s_i_id;
    long s_w_id;
    short s_quantity;
    char s_dist_01[S_DIST_LEN+1];
    char s_dist_02[S_DIST_LEN+1];
    char s_dist_03[S_DIST_LEN+1];
    char s_dist_04[S_DIST_LEN+1];
    char s_dist_05[S_DIST_LEN+1];
    char s_dist_06[S_DIST_LEN+1];
    char s_dist_07[S_DIST_LEN+1];
    char s_dist_08[S_DIST_LEN+1];
    char s_dist_09[S_DIST_LEN+1];
    char s_dist_10[S_DIST_LEN+1];
    long s_ytd;
    short s_order_cnt;
    short s_remote_cnt;
    char s_data[S_DATA_LEN+1];
    short len;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcint;
    char bcphint[128];
    char err_log_path[256];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxstkcl");

    sprintf(name, "%s..%s", aptr->database, "stock");

    strcpy(err_log_path,aptr->log_path);
    strcat(err_log_path,"stock.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }
}

```

```

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;
time_start = (TimeNow() / MILLI);
printf("...Loading stock table\n");
for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (long)aptr->starting_warehouse; s_w_id <= aptr->num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);
        len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        stock_rows_loaded++;
        CheckForCommit_Big(w_hdbc1, w_hstmt1,
stock_rows_loaded, "stock", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading stock table.\n");
SQLFreeStmt(w_hstmt1, SQL_DROP);

```

```

SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");

return;
}

//=====
// Function : LoadCustomer
//=====
void LoadCustomer()
{
    LOADER_TIME_STRUCT      customer_time_start;
    LOADER_TIME_STRUCT      history_time_start;
    long                     w_id;
    short                   d_id;
    DWORD                   dwThreadId[MAX_CUSTOMER_THREADS];
    HANDLE                  hThread[MAX_CUSTOMER_THREADS];
    char                    name[20];
    RETCODE                 rc;
    DBINT                  rcount;
    bcpHint[128];
    cmd[256];
    int                     num_procs;
    err_log_path_cust[256];
    err_log_path_hist[256];

    // Seed with unique number
    seed(5);

    printf("Loading customer and history tables...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxcuscl");
        // check the number of processors on this system
        // if 8 or more processors, then build index on History.
        // if less than 8 processors, do not build the index
        num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
        if ( num_procs >= 8 )
            BuildIndex("idxhiscl");
    }

    // Initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "customer");

    strcpy(err_log_path_cust,aptr->log_path);
    strcat(err_log_path_cust,"customer.err");
    rc = bcp_init(c_hdbc1, name, NULL, err_log_path_cust, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
}

```

```

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    sprintf(name, "%s..%s", aptr->database, "history");

    rc = bcp_init(c_hdbc2, name, NULL, "logs\history.err", DB_IN);
    strcpy(err_log_path_hist,aptr->log_path);
    strcat(err_log_path_hist,"history.err");
    rc = bcp_init(c_hdbc2, name, NULL, err_log_path_hist, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    sprintf(bcphint, "tablock");
    rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    customer_rows_loaded = 0;
    history_rows_loaded = 0;

    CustomerBufInit();

    customer_time_start.time_start = (TimeNow() / MILLI);
    history_time_start.time_start = (TimeNow() / MILLI);

    for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
    {
        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {
            CustomerBufLoad(d_id, w_id);

            // Start parallel loading threads here...
            // Start customer table thread
            printf("...Loading customer table for: d_id = %d, w_id
= %d\n", d_id, w_id);

            hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
0,
&dwThreadId[0]);
            if (hThread[0] == NULL)
            {

```

```

thread = 0.\n");
                printf("Error, failed in creating creating
                       exit(-1);
}
// Start History table thread
printf(..Loading history table for: d_id = %d, w_id
      = %d\n", d_id, w_id);

hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
0,
&dwThreadId[1]);

if (hThread[1] == NULL)
{
    printf("Error, failed in creating creating
thread = 1.\n");
           exit(-1);
}

WaitForSingleObject( hThread[0], INFINITE );
WaitForSingleObject( hThread[1], INFINITE );

if (CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
}
}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))

```

```

{
    BuildIndex("idxcuscl");
    // check the number of processors on this system
    // if 8 or more processors, then build index on History.
    // if less than 8 processors, do not build the index
    num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
    if (num_procs >= 8)
        BuildIndex("idxhiscl");
}

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID = 1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "osql -S% -U% -P% -d% -e -Q\"update customer set c_first
= 'C_LOAD' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" > %snurand_load.log",
aptr->server,
aptr->user,
aptr->password,
aptr->database,
LOADER_NURAND_C,
aptr->log_path);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
// Function : CustomerBufInit
//=====
void CustomerBufInit()
{
    long i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");

```

```

        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount = (float) 0;

        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment = 0;
        customer_buf[i].c_payment_cnt = 0;
        customer_buf[i].c_delivery_cnt = 0;

        strcpy(customer_buf[i].c_data,"");

        customer_buf[i].h_amount = 0;

        strcpy(customer_buf[i].h_data,"");
    }

}

//=====
// Function : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====
void CustomerBufLoad(int d_id, long w_id)
{
    long                                     i;
    CUSTOMER_SORT_STRUCT      c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

        MakeAlphaStringPadded(8,16,FIRST_NAME_LEN, c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;
        customer_buf[i].c_ytd_payment = 10.0;
        customer_buf[i].c_payment_cnt = 1;
        customer_buf[i].c_delivery_cnt = 0;
    }
}

```

```

customer_buf[i].c_id = c[i].c_id;
strcpy(customer_buf[i].c_first, c[i].c_first);
strcpy(customer_buf[i].c_last, c[i].c_last);
customer_buf[i].c_middle[0] = 'O';
customer_buf[i].c_middle[1] = 'E';
MakeAddress(customer_buf[i].c_street_1,
            customer_buf[i].c_street_2,
            customer_buf[i].c_city,
            customer_buf[i].c_state,
            customer_buf[i].c_zip);
MakeNumberString(16, 16, PHONE_LEN, customer_buf[i].c_phone);

if (RandomNumber(1L, 100L) > 10)
    customer_buf[i].c_credit[0] = 'G';
else
    customer_buf[i].c_credit[0] = 'B';
customer_buf[i].c_credit[1] = 'C';
customer_buf[i].c_credit_lim = 50000.0;
customer_buf[i].c_discount = ((float) RandomNumber(0L, 5000L)) /
10000.0;
strcpy(customer_buf[i].c_balance,"-10.0");
MakeAlphaStringPadded(300, 500, C_DATA_LEN,
customer_buf[i].c_data);

// Generate HISTORY data
MakeAlphaStringPadded(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
}

//=====
// Function : LoadCustomerTable
//
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    long                                     i;
    long                                     c_id;
    short                                    c_d_id;
    long                                     c_w_id;
    char                                     c_first[FIRST_NAME_LEN+1];
    char                                     c_middle[MIDDLE_NAME_LEN+1];
    char                                     c_last[LAST_NAME_LEN+1];
    char                                     c_street_1[ADDRESS_LEN+1];
    char                                     c_street_2[ADDRESS_LEN+1];
    char                                     c_city[ADDRESS_LEN+1];
    char                                     c_state[STATE_LEN+1];
    char                                     c_zip[ZIP_LEN+1];
    char                                     c_phone[PHONE_LEN+1];
    char                                     c_credit[CREDIT_LEN+1];
    double                                    c_credit_lim;
    double                                    c_discount;
    char                                     c_balance[6];
    double                                    c_ytd_payment;
    short                                    c_payment_cnt;
    short                                    c_delivery_cnt;
    char                                     c_data[C_DATA_LEN+1];
}

```

```

char          c_since[C_SINCE_LEN+1];
RETCODE        rc;

i = 0;
rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

```

```

rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0, SQLCHARACTER, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, C_DATA_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;

    strcpy(c_first, customer_buf[i].c_first);
    strcpy(c_middle, customer_buf[i].c_middle);
    strcpy(c_last, customer_buf[i].c_last);
    strcpy(c_street_1, customer_buf[i].c_street_1);
    strcpy(c_street_2, customer_buf[i].c_street_2);
    strcpy(c_city, customer_buf[i].c_city);
    strcpy(c_state, customer_buf[i].c_state);
    strcpy(c_zip, customer_buf[i].c_zip);
    strcpy(c_phone, customer_buf[i].c_phone);
    strcpy(c_credit, customer_buf[i].c_credit);

    FormatDate(&c_since);

    c_credit_lim = customer_buf[i].c_credit_lim;
    c_discount = customer_buf[i].c_discount;
    strcpy(c_balance, customer_buf[i].c_balance);
    c_ytd_payment = customer_buf[i].c_ytd_payment;
    c_payment_cnt = customer_buf[i].c_payment_cnt;
    c_delivery_cnt = customer_buf[i].c_delivery_cnt;
    strcpy(c_data, customer_buf[i].c_data);

    // Send data to server
    rc = bcp_sendrow(c_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    customer_rows_loaded++;
    CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
}

```

```

}

//=====
// Function : LoadHistoryTable
//=====
void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    long i;
    long c_id;
    short c_d_id;
    long c_w_id;
    double h_amount;
    char h_data[H_DATE_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    i = 0;
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);
    }
}

```

```

FormatDate(&h_date);

// send to server
rc = bcp_sendrow(c_hdbc2);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

history_rows_loaded++;
CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
}

//=====
// Function : LoadOrders
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT orders_time_start;
    LOADER_TIME_STRUCT new_order_time_start;
    LOADER_TIME_STRUCT order_line_time_start;
    long w_id;
    short d_id;
    DWORD dwThreadID[MAX_ORDER_THREADS];
    HANDLE hThread[MAX_ORDER_THREADS];
    char name[20];
    RETCODE rc;
    bcpHint[128];
    err_log_path_ord[256];
    err_log_path_nord[256];
    err_log_path_ordl[256];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordcl");
        BuildIndex("idxnordcl");
        BuildIndex("idxodlc1");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    strcpy(err_log_path_ord, aptr->log_path);
    strcat(err_log_path_ord, "orders.err");
    rc = bcp_init(o_hdbc1, name, NULL, err_log_path_ord, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
}

```

```

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
}

sprintf(name, "%s..%s", aptr->database, "new_order");

rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword,err", DB_IN);
strcpy(err_log_path_nord,aptr->log_path);
strcat(err_log_path_nord,"neword,err");
rc = bcp_init(o_hdbc2, name, NULL, err_log_path_nord, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (no_w_id, no_d_id, no_o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
    rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
}

sprintf(name, "%s..%s", aptr->database, "order_line");

rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline,err", DB_IN);
strcpy(err_log_path_ordl,aptr->log_path);
strcat(err_log_path_ordl,"ordline,err");
rc = bcp_init(o_hdbc3, name, NULL, err_log_path_ordl, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id, ol_o_id,
ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

orders_rows_loaded      = 0;
new_order_rows_loaded  = 0;
order_line_rows_loaded = 0;

OrdersBufInit();

orders_time_start.time_start = (TimeNow() / MILLI);
new_order_time_start.time_start = (TimeNow() / MILLI);
order_line_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{

```

```

for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
{
    OrdersBufLoad(d_id, w_id);
    // start parallel loading threads here...
    // start Orders table thread
    printf("...Loading Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);

    hThread[0] = CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadOrdersTable,
        &orders_time_start,
        0,
        &dwThreadID[0]);
    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating
thread = 0.\n");
        exit(-1);
    }

    // start NewOrder table thread
    printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

    hThread[1] = CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadNewOrderTable,
        &new_order_time_start,
        0,
        &dwThreadID[1]);
    if (hThread[1] == NULL)
    {
        printf("Error, failed in creating creating
thread = 1.\n");
        exit(-1);
    }

    // start Order-Line table thread
    printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

    hThread[2] = CreateThread(NULL,

```

```

0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadID[2]);

    if (hThread[2] == NULL)
    {
        printf("Error, failed in creating creating
thread = 2.\n");
        exit(-1);
    }

    WaitForSingleObject( hThread[0], INFINITE );
    WaitForSingleObject( hThread[1], INFINITE );
    WaitForSingleObject( hThread[2], INFINITE );

    if (CloseHandle(hThread[0]) == FALSE)
    {
        printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
    }

    if (CloseHandle(hThread[1]) == FALSE)
    {
        printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
    }

    if (CloseHandle(hThread[2]) == FALSE)
    {
        printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
    }
}

printf("Finished loading orders.\n");

return;
}

//=====
// Function : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
void OrdersBufInit()
{
    int      i;
    int      j;
}

```

```

for (i=0;i<orders_per_district;i++)
{
    orders_buf[i].o_id = 0;
    orders_buf[i].o_d_id = 0;
    orders_buf[i].o_w_id = 0;
    orders_buf[i].o_c_id = 0;
    orders_buf[i].o_carrier_id = 0;
    orders_buf[i].o.ol_cnt = 0;
    orders_buf[i].o.all_local = 0;

    for (j=0;j<14;j++)
    {
        orders_buf[i].o.ol[j].ol = 0;
        orders_buf[i].o.ol[j].ol_i_id = 0;
        orders_buf[i].o.ol[j].ol_supply_w_id = 0;
        orders_buf[i].o.ol[j].ol_quantity = 0;
        orders_buf[i].o.ol[j].ol_amount = 0;
        strcpy(orders_buf[i].o.ol[j].ol_dist_info,"");
    }
}

//=====
// Function : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
void OrdersBufLoad(short d_id, long w_id)
{
    int      cust[ORDERS_PER_DISTRICT+1];
    long     o_id;
    long     ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data
        orders_buf[o_id].o.d_id = d_id;
        orders_buf[o_id].o.w_id = w_id;
        orders_buf[o_id].o.id = o_id+1;
        orders_buf[o_id].o.c_id = cust[o_id+1];
        orders_buf[o_id].o.ol_cnt = (short)RandomNumber(5L, 15L);

        if (o_id < first_new_order)
        {
            orders_buf[o_id].o.carrier_id =
                (short)RandomNumber(1L, 10L);
            orders_buf[o_id].o.all_local = 1;
        }
        else

```

```

{
    orders_buf[o_id].o_carrier_id = 0;
    orders_buf[o_id].o_all_local = 1;
}

for (ol=0; ol<orders_buf[o_id].o.ol_cnt; ol++)
{
    orders_buf[o_id].o.ol[ol].ol = ol+1;
    orders_buf[o_id].o.ol[ol].ol_i_id = RandomNumber(1L,
max_items);
    orders_buf[o_id].o.ol[ol].ol_supply_w_id = w_id;
    orders_buf[o_id].o.ol[ol].ol_quantity = 5;
    MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o.ol[ol].ol_dist_info);

    // Generate ORDER-LINE data
    if (o_id < first_new_order)
    {
        orders_buf[o_id].o.ol[ol].ol_amount = 0;
        // Added to insure ol_delivery_d set
properly during load

        FormatDate(&orders_buf[o_id].o.ol[ol].ol_delivery_d);

    }
    else
    {
        orders_buf[o_id].o.ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
        // Added to insure ol_delivery_d set
properly during load
        // odbc datetime format

        strcpy(orders_buf[o_id].o.ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
    }
}
}

//=====
// Function : LoadOrdersTable
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int i;
    long o_id;
    short o_d_id;
    long o_w_id;
    long o_c_id;
    short o_carrier_id;
    short o.ol_cnt;
    short o_all_local;
    char o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc;
    DBINT rcint;
}

```

```

// bind ORDER data
i = 0;
rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN, NULL, 0,
SQLCHARACTER, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

for (i = 0; i < orders_per_district; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;
    o_c_id    = orders_buf[i].o_c_id;
    o_carrier_id = orders_buf[i].o_carrier_id;
    o.ol_cnt  = orders_buf[i].o.ol_cnt;
    o_all_local = orders_buf[i].o.all_local;

    FormatDate(&o_entry_d);

    // send data to server
    rc = bcp_sendrow(o_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    orders_rows_loaded++;
    CheckForCommit(o_hdbc1, o_hstml, orders_rows_loaded, "orders",
&orders_time_start->time_start);
}

```

```

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxordcl");

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxordncl");
}

//=====
// Function : LoadNewOrderTable
//=====
void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    long          i;
    long          o_id;
    short         o_d_id;
    long          o_w_id;
    RETCODE       rc;
    DBINT        rcint;

    // Bind NEW-ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);
    }
}

new_order_rows_loaded++;
CheckForCommit_Big(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
}

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc2);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc2);

    SQLFreeStmt(o_hstmt2, SQL_DROP);
    SQLDisconnect(o_hdbc2);
    SQLFreeConnect(o_hdbc2);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxnordcl");
}

//=====
// Function : LoadOrderLineTable
//=====
void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    long          i;
    long          j;
    long          o_id;
    short         o_d_id;
    long          o_w_id;
    double        ol;
    long          ol_i_id;
    long          ol_supply_w_id;
    short         ol_quantity;
    double        ol_amount;
    char          ol_dist_info[DIST_INFO_LEN+1];
    char          ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE       rc;
    DBINT        rcint;

    // bind ORDER-LINE data
    i = 0;
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

```

```

rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0, OL_DELIVERY_D_LEN,
NULL, 0, SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

for (i = 0; i < orders_per_district; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;

    for (j=0; j < orders_buf[i].o.ol_cnt; j++)
    {
        ol          = orders_buf[i].o.ol[j].ol;
        ol_i_id     = orders_buf[i].o.ol[j].ol_i_id;
        ol_supply_w_id = orders_buf[i].o.ol[j].ol_supply_w_id;
        ol_quantity   = orders_buf[i].o.ol[j].ol_quantity;
        ol_amount     = orders_buf[i].o.ol[j].ol_amount;

        strcpy(ol_delivery_d,orders_buf[i].o.ol[j].ol_delivery_d);

        strcpy(ol_dist_info,orders_buf[i].o.ol[j].ol_dist_info);

        rc = bcp_sendrow(o_hdbc3);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        order_line_rows_loaded++;

        CheckForCommit_Big(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
    }
}

```

```

}

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcount = bcp_done(o_hdbc3);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc3);

    SQLFreeStmt(o_hstmt3, SQL_DROP);
    SQLDisconnect(o_hdbc3);
    SQLFreeConnect(o_hdbc3);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxodlc1");
}

//=====
// Function : GetPermutation
//=====
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
// Function : CheckForCommit
//=====
void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    long rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long time_end, time_diff;

    if ( !(rows_loaded % aptr->batch) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;
    }
}

```

```

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d (%.2f
rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff
: 1L));
               *time_start = time_end;
}
return;
}

//=====
// Function : CheckForCommit_Big
//
//=====
void CheckForCommit_Big(HDBC hdbc,
                       HSTMT hstmt,
                       double rows_loaded,
                       char *table_name,
                       long *time_start)
{
    long time_end, time_diff;
    if ( !(fmod(rows_loaded,aptr->batch) ) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;
        printf("-> Loaded %ld rows into %s in %ld sec - Total = %.0f
%.2f rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff
: 1L));
               *time_start = time_end;
}
return;
}

//=====
// Function : OpenConnections
//
//=====
void OpenConnections()
{
    RETCODE rc;

```

```

char szDriverString[300];
char szDriverStringOut[1024];
SQLSMALLINT cbDriverStringOut;

SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

// Open connections to SQL Server
// Connection 1
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption ( i_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = SQLDriverConnect ( i_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
```

```

        (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(i_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 2
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = SQLDriverConnect ( w_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(w_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 3
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = SQLDriverConnect ( c_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 4
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 5
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

```

```

rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 6
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}
}

// Connection 7
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
                        NULL,
                        (SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
                        (SQLCHAR*)&szDriverStringOut[0],
                        sizeof(szDriverStringOut),
                        &cbDriverStringOut,
                        SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc3);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

//=====================================================================
// Function name: BuildIndex
//=====================================================================
void BuildIndex(char          *index_script)
{
    char      cmd[256];

    printf("Starting index creation:  %s\n",index_script);

    sprintf(cmd, "osql -S%s -U%s -P%s -e -i%s\\%s.sql > %s%.log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->index_script_path,
            index_script,
            aptr->log_path,
            index_script);

    system(cmd);

    printf("Finished index creation:  %s\n",index_script);
}
}

```

```

//=====
// Function name: HandleErrorDBC
//
//=====
void HandleErrorDBC (SQLHDBC  hdbc1)
{
    SQLCHAR      SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN       NativeError;
    SQLSMALLINT  i, MsgLen;
    SQLRETURN    rc2;
    char         timebuf[128];
    char         datebuf[128];
    char         err_log_path[256];
    FILE        *fpl;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
    &NativeError,
                           Msg, sizeof(Msg) , &MsgLen )) != SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );
        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n==>SQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fpl = fopen(err_log_path,"a+");
        if (fpl == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fpl, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
            fclose(fpl);
        }
        i++;
    }

    //=====
    // Function   : HandleErrorSTMT
    //
    //=====
    void HandleErrorSTMT (HSTMT  hstmt1)
    {
        SQLCHAR      SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
        SQLLEN       NativeError;
        SQLSMALLINT  i, MsgLen;

```

```

        SQLRETURN    rc2;
        char         timebuf[128];
        char         datebuf[128];
        char         err_log_path[256];
        FILE        *fpl;

        i = 1;
        while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
    &NativeError,
                           Msg, sizeof(Msg) , &MsgLen )) != SQL_NO_DATA )
        {
            if (total_db_errors >= MAX_SQL_ERRORS)
            {
                printf(">>>> Maximum SQL errors of %d exceeded.
Terminating TPCCLDR.<<<<\n",total_db_errors);
                exit(9);
            }
            total_db_errors++;

            sprintf( szLastError , "%s" , Msg );

            _strtime(timebuf);
            _strdate(datebuf);

            printf( "[%s : %s] %s\nSQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);

            strcpy(err_log_path,aptr->log_path);
            strcat(err_log_path,"tpccldr.err");
            fpl = fopen(err_log_path,"a+");
            if (fpl == NULL)
                printf("ERROR: Unable to open errorlog file.\n");
            else
            {
                fprintf(fpl, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
                fclose(fpl);
            }
            i++;
        }

        //=====
        // Function   : FormatDate
        //
        //=====
        void FormatDate ( char* szTimeCOutput )
        {
            struct tm when;
            time_t now;

            time( &now );
            when = *localtime( &now );
            mktime( &when );

```

```
// odbc datetime format  
strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000" , &when );  
  
return;  
}
```

Appendix C: Tunable Parameters

Microsoft SQL Server 2003 Installation Procedures

Microsoft SQL Server 2005 Enterprise x64 Edition SP2
 Installation Procedures
 Type of installation: custom
 During the custom installation, use the default settings for all except the following two areas:
 Services accounts:
 SQL Server - local system account
 SQL Server Agent - local system account
 Set the sort order/collation as Latin1_General / BIN

Microsoft SQL Server Configuration Parameters

```
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11> 12> -----
-----
-- File: VERSION.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
-- Copyright Microsoft, 2005
-- 
-- Extracts current version of SQL Server
-- 
-----
```

```
USE master
1> 2> 3> 4> 5>
```

```
SELECT CONVERT(char(20),
 SERVERPROPERTY('ProductVersion')),
        CONVERT(char(20),
 SERVERPROPERTY('ProductLevel')),
        CONVERT(char(29), SERVERPROPERTY('Edition'))
-----
9.00.3042.00      SP2          Enterprise
Edition (64-bit)
(1 row affected)
1> 2> 3>
SELECT CONVERT(char(30), GETDATE(), 21)
-----
2008-10-20 13:43:18.530
(1 row affected)
1>
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11> 12> 13> 14>
-----
-- 
-- File: CONFIG.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
-- Copyright Microsoft, 2005
-- 
-- - Collects SQL Server configuration
parameters      --
-- 
-----
```

```
PRINT ''
SELECT CONVERT(char(30), GETDATE(), 21)
PRINT ''
```

```
2008-10-20 13:43:18.730
(1 row affected)
1> 2> 3> Configuration option 'show advanced options' changed from 1 to 1. Run the RECONFIGURE statement to install.
sp_configure 'show advanced',1
1> 2> 3>
RECONFIGURE WITH OVERRIDE
1> 2> 3>
sp_configure
    name           minimum
maximum         config_value run_value
-----
```

	Ad Hoc Distributed Queries	0
1	0	0
affinity I/O mask	-2147483648	
2147483647	0	0
affinity mask	-2147483648	
2147483647	65535	65535
affinity64 I/O mask	-2147483648	
2147483647	0	0
affinity64 mask	-2147483648	
2147483647	0	0
Agent XPs	0	
1	0	0
allow updates	0	
1	0	0
awe enabled	0	
1	0	0
blocked process threshold	0	
86400	0	0
c2 audit mode	0	
1	0	0
clr enabled	0	
1	0	0
common criteria compliance enabled	0	
1	0	0
cost threshold for parallelism	0	
32767	5	5
cross db ownership chaining	0	
1	0	0
cursor threshold	-1	
2147483647	-1	-1
Database Mail XPs	0	
1	0	0
default full-text language	0	
2147483647	1033	1033
default language	0	
9999	0	0
default trace enabled	0	
1	1	1
Disallow results from triggers	0	
1	0	0
fill factor (%)	0	
100	0	0
ft crawl bandwidth (max)	0	
32767	100	100
ft crawl bandwidth (min)	0	
32767	0	0
ft notify bandwidth (max)	0	
32767	100	100
ft notify bandwidth (min)	0	
32767	0	0
in-doubt xact resolution	0	
2	0	0
index create memory (KB)	704	704
2147483647	0	0
lightweight pooling	0	
1	1	1
locks	5000	
2147483647	0	0
max degree of parallelism	0	
64	1	1
max full-text crawl range	0	
256	4	4

max server memory (MB)			16
2147483647	253600	253600	
max text repl size (B)			0
2147483647	65536	65536	
max worker threads			128
32767	1350	1350	
media retention			0
365	0	0	
min memory per query (KB)			512
2147483647	512	512	
min server memory (MB)			0
2147483647	0	0	
nested triggers			0
1	1	1	
network packet size (B)			512
32767	2048	2048	
Ole Automation Procedures			0
1	0	0	
open objects			0
2147483647	0	0	
PH timeout (s)			1
3600	60	60	
precompute rank			0
1	0	0	
priority boost			0
1	1	1	
query governor cost limit			0
2147483647	0	0	
query wait (s)			-1
2147483647	-1	-1	
recovery interval (min)			0
32767	32767	32767	
remote access			0
1	1	1	
remote admin connections			0
1	0	0	
remote login timeout (s)			0
2147483647	20	20	
remote proc trans			0
1	0	0	
remote query timeout (s)			0
2147483647	600	600	
Replication XPs			0
1	0	0	
scan for startup procs			0
1	0	0	
server trigger recursion			0
1	1	1	
set working set size			0
1	0	0	
show advanced options			0
1	1	1	
SMO and DMO XPs			0
1	1	1	
SQL Mail XPs			0
1	0	0	
transform noise words			0
1	0	0	
two digit year cutoff			1753
9999	2049	2049	
user connections			0
32767	0	0	

user options	0	0	0
32767	0	0	0
Web Assistant Procedures	0	0	0
1	0	0	0
xp_cmdshell	0	0	0
1	0	0	0

Microsoft SQL Server Node Configuration Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration
Class Name: <NO CLASS>
Last Write Time: 2/19/2008 - 3:34 PM

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node0
Class Name: <NO CLASS>
Last Write Time: 9/18/2007 - 6:33 AM

Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xf0

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node1
Class Name: <NO CLASS>
Last Write Time: 9/30/2008 - 11:08 AM

Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xf0

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node2
Class Name: <NO CLASS>
Last Write Time: 10/16/2008 - 2:29 PM

Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xf

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node3
Class Name: <NO CLASS>

Last Write Time: 10/16/2008 - 2:29 PM

Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xf

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node3
Class Name: <NO CLASS>
Last Write Time: 2/19/2008 - 3:34 PM

Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xf000

Microsoft SQL Server Super Socket Configuration Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp
Class Name: <NO CLASS>
Last Write Time: 9/18/2007 - 6:39 AM

Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: ListenOnAllIPs
Type: REG_DWORD
Data: 0x1

Value 2
Name: NoDelay
Type: REG_DWORD
Data: 0

Value 3
Name: KeepAlive
Type: REG_DWORD
Data: 0x7530

Value 4
Name: DisplayName
Type: REG_SZ
Data: TCP/IP

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP1
Class Name: <NO CLASS>
Last Write Time: 9/18/2007 - 6:44 AM

Value 0	Name: Enabled Type: REG_DWORD Data: 0x1	Name: IpAddress Type: REG_SZ Data: 130.168.208.10	Name: TcpDynamicPorts Type: REG_SZ Data:
Value 1	Name: Active Type: REG_DWORD Data: 0x1	Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP3 Class Name: <NO CLASS> Last Write Time: 9/18/2007 - 6:41 AM	Value 4 Name: DisplayName Type: REG_SZ Data: Specific IP Address
Value 2	Name: TcpPort Type: REG_SZ Data: 2002	Value 0 Name: Enabled Type: REG_DWORD Data: 0x1	Value 5 Name: IpAddress Type: REG_SZ Data: 130.122.208.10
Value 3	Name: TcpDynamicPorts Type: REG_SZ Data:	Value 1 Name: Active Type: REG_DWORD Data: 0x1	Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IPAll Class Name: <NO CLASS> Last Write Time: 9/18/2007 - 6:33 AM
Value 4	Name: DisplayName Type: REG_SZ Data: Specific IP Address	Value 2 Name: TcpPort Type: REG_SZ Data: 2001	Value 0 Name: TcpPort Type: REG_SZ Data: 2001[0x1],2002[0x2],2003[0x4],2004[0x8]
Value 5	Name: IpAddress Type: REG_SZ Data: 130.120.208.10	Value 3 Name: TcpDynamicPorts Type: REG_SZ Data:	Value 1 Name: TcpDynamicPorts Type: REG_SZ Data:
Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP2 Class Name: <NO CLASS> Last Write Time: 9/18/2007 - 6:44 AM		Value 4 Name: DisplayName Type: REG_SZ Data: Specific IP Address	Value 2 Name: DisplayName Type: REG_SZ Data: Any IP Address
Value 0	Name: Enabled Type: REG_DWORD Data: 0x1	Value 5 Name: IpAddress Type: REG_SZ Data: 130.121.208.10	
Value 1	Name: Active Type: REG_DWORD Data: 0x1	Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP4 Class Name: <NO CLASS> Last Write Time: 9/18/2007 - 6:41 AM	
Value 2	Name: TcpPort Type: REG_SZ Data: 2004	Value 0 Name: Enabled Type: REG_DWORD Data: 0x1	
Value 3	Name: TcpDynamicPorts Type: REG_SZ Data:	Value 1 Name: Active Type: REG_DWORD Data: 0x1	
Value 4	Name: DisplayName Type: REG_SZ Data: Specific IP Address	Value 2 Name: TcpPort Type: REG_SZ Data: 2003	
Value 5		Value 3	

Database Server System Configuration

System Information report written at: 10/21/08

15:58:29

System Name: B2
[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003 Enterprise x64 Edition
Version	5.2.3790 Service Pack 2 Build 3790
Other OS Description	R2
OS Manufacturer	Microsoft Corporation
System Name	B2
System Manufacturer	HP
System Model	ProLiant DL585 G5

System Type x64-based PC
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 Processor AMD64 Family 16 Model 4 Stepping 2
 AuthenticAMD ~2713 Mhz
 BIOS Version/Date HP A07, 9/27/2008
 SMBIOS Version 2.4
 Windows Directory C:\WINDOWS
 System Directory C:\WINDOWS\system32
 Boot Device \Device\HarddiskVolume37
 Locale United States
 Hardware Abstraction Layer Version = "5.2.3790.3959 (srv03_sp2_rtm.070216-1710)"
 User Name Not Available
 Time Zone Central Daylight Time
 Total Physical Memory 262,141.62 MB
 Available Physical Memory 250.08 GB
 Total Virtual Memory 252.51 GB
 Available Virtual Memory 252.11 GB
 Page File Space 2.00 GB
 Page File C:\pagefile.sys

 [Hardware Resources]

 [Conflicts/Sharing]
 Resource Device
 I/O Port 0x0000A000-0x0000AFFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x0000A000-0x0000AFFF Smart Array
 P800 Controller (Non-Miniport)

I/O Port 0x00000000-0x000003AF	PCI bus	I/O Port 0x00004000-0x00004FFF	PCI standard
I/O Port 0x00000000-0x000003AF	Direct memory access controller	PCI-to-PCI bridge	Smart Array
I/O Port 0x00003C0-0x000003DF	PCI bus	I/O Port 0x00004000-0x00004FFF	P800 Controller (Non-Miniport)
I/O Port 0x00003C0-0x000003DF	ATI ES1000	PCI-to-PCI bridge	Smart Array
IRQ 10 Base System Device		I/O Port 0x00008000-0x00008FFF	P800 Controller (Non-Miniport)
IRQ 10 PCI Device		PCI-to-PCI bridge	Smart Array
Memory Address 0xDA000000-0xDDFFFFFF	PCI standard	[DMA]	
PCI-to-PCI bridge		Resource Device Status	
Memory Address 0xDA000000-0xDDFFFFFF	HP NC371i	Channel 7 Direct memory access controller	OK
Virtual Bus Device			
I/O Port 0x00009000-0x00009FFF	PCI standard	[Forced Hardware]	
PCI-to-PCI bridge		Device PNP Device ID	
I/O Port 0x00009000-0x00009FFF	Smart Array	[I/O]	
P800 Controller (Non-Miniport)		Resource Device Status	
I/O Port 0x00006000-0x0000FFFF	PCI bus	0x00000000-0x000003AF	PCI bus OK
I/O Port 0x00006000-0x0000FFFF	PCI standard	0x00000000-0x000003AF	Direct memory access
PCI-to-PCI bridge		controller OK	
I/O Port 0x00006000-0x0000FFFF	LSI Adapter,	0x000003B0-0x000003BB	PCI bus OK
SAS 3000 series, 8-port with 1068 -StorPort		ATI ES1000	OK
I/O Port 0x00003000-0x00003FFF	PCI standard	0x000003C0-0x000003DF	PCI bus OK
PCI-to-PCI bridge		ATI ES1000	OK
I/O Port 0x00003000-0x00003FFF	Smart Array	0x000003C0-0x000003DF	PCI bus OK
P800 Controller (Non-Miniport)		0x000003B0-0x000003BB	ATI ES1000
I/O Port 0x00005000-0x00005FFF	PCI standard	0x000003E0-0x00000CF7	PCI bus OK
PCI-to-PCI bridge		0x00001000-0x00005FFF	PCI bus OK
I/O Port 0x00005000-0x00005FFF	Smart Array	0x00001000-0x00005FFF	ATI ES1000 OK
E500 Controller (Non-Miniport)		0x00000070-0x00000079	Motherboard resources
Memory Address 0xD0000000-0xD9EFFFFF	PCI bus	0x00000408-0x0000040F	Motherboard resources
Memory Address 0xD0000000-0xD9EFFFFF	ATI ES1000	0x000004D0-0x000004D1	Motherboard resources
IRQ 18 ATI ES1000		0x00000020-0x0000003F	Motherboard resources
IRQ 18 Smart Array P800 Controller (Non-Miniport)		0x000000A0-0x000000BF	Motherboard resources
Memory Address 0xA0000-0xBFFFF	PCI bus	0x00000090-0x0000009F	Motherboard resources
Memory Address 0xA0000-0xBFFFF	ATI ES1000	0x00000050-0x00000053	Motherboard resources
I/O Port 0x00007000-0x00007FFF	PCI standard	0x00000700-0x0000073F	Motherboard resources
PCI-to-PCI bridge		0x00000800-0x000008FE	Motherboard resources
I/O Port 0x00007000-0x00007FFF	Smart Array	0x00000900-0x000009FE	Motherboard resources
P800 Controller (Non-Miniport)		0x000009FF-0x000009FF	Motherboard resources
I/O Port 0x00001000-0x00005FFF	PCI bus	0x00000A00-0x00000AFE	Motherboard resources
I/O Port 0x00001000-0x00005FFF	ATI ES1000	0x00000090-0x000009F	Motherboard resources
I/O Port 0x00003B0-0x000003BB	PCI bus	0x00000A00-0x00000AFE	Motherboard resources
I/O Port 0x00003B0-0x000003BB	ATI ES1000	OK	

0x000000AFF-0x000000AFF OK	Motherboard resources	0x00001400-0x000014FF	Base System Device OK	IRQ 16	Smart Array E500 Controller (Non-Miniport) OK
0x00000B00-0x00000BFE OK	Motherboard resources	0x00001800-0x0000181F to USB Host Controller	Standard Universal PCI OK	IRQ 19	Smart Array P800 Controller (Non-Miniport) OK
0x00000BFF-0x00000BFF OK	Motherboard resources	0x00005000-0x00005FFF bridge OK	PCI standard PCI-to-PCI	IRQ 55	Smart Array P800 Controller (Non-Miniport) OK
0x00000010-0x0000001F OK	Motherboard resources	0x00005000-0x00005FFF Controller (Non-Miniport)	Smart Array E500 OK	IRQ 54	Smart Array P800 Controller (Non-Miniport) OK
0x00000C80-0x00000C83 OK	Motherboard resources	0x00004000-0x00004FFF bridge OK	PCI standard PCI-to-PCI	IRQ 57	Smart Array P800 Controller (Non-Miniport) OK
0x00000CD4-0x00000CD7 OK	Motherboard resources	0x00004000-0x00004FFF Controller (Non-Miniport)	Smart Array P800 OK	IRQ 56	Smart Array P800 Controller (Non-Miniport) OK
0x00000CF9-0x00000CF9 OK	Motherboard resources	0x00003000-0x00003FFF bridge OK	PCI standard PCI-to-PCI	IRQ 31	HP NC371i Virtual Bus Device OK
0x00000F50-0x00000F58 OK	Motherboard resources	0x00003000-0x00003FFF Controller (Non-Miniport)	Smart Array P800 OK	IRQ 32	HP NC371i Virtual Bus Device OK
0x000000F0-0x000000F0 OK	Motherboard resources	0x00006000-0x0000FFFF bridge OK	PCI bus OK	IRQ 24	LSI Adapter, SAS 3000 series, 8-port with 1068 -StorPort OK
0x00000CA0-0x00000CA1 OK	Motherboard resources	0x00006000-0x0000FFFF series, 8-port with 1068 -StorPort	LSI Adapter, SAS 3000 OK	IRQ 26	Smart Array P600 Controller (Non-Miniport) OK
0x00000CA4-0x00000CA5 OK	Motherboard resources	0x0000A000-0x0000AFFF bridge OK	PCI standard PCI-to-PCI		[Memory]
0x00000C00-0x00000C03 OK	Motherboard resources	0x0000A000-0x0000AFFF Controller (Non-Miniport)	Smart Array P800 OK	Resource	Device Status
0x00000CA2-0x00000CA3 OK	System timer OK	0x00009000-0x00009FFF bridge OK	PCI standard PCI-to-PCI	0xA0000-0xBFFF	PCI bus OK
0x00000040-0x00000043	System timer OK	0x00009000-0x00009FFF Controller (Non-Miniport)	Smart Array P800 OK	0xA0000-0xBFFF	ATI ES1000 OK
0x00000080-0x0000008F controller OK	Direct memory access	0x00009000-0x00009FFF bridge OK	PCI standard PCI-to-PCI	0xD0000000-0xD9EFFFF	PCI bus OK
0x000000C0-0x000000DF controller OK	Direct memory access	0x00008000-0x00008FFF bridge OK	Smart Array P800 OK	0xD0000000-0xD9EFFFF	ATI ES1000 OK
0x00000061-0x00000061	System speaker OK	0x00008000-0x00008FFF Controller (Non-Miniport)	PCI standard PCI-to-PCI	0xE0000000-0xE3FFFFFF	PCI bus OK
0x00000060-0x00000060 Standard Microsoft Natural PS/2 Keyboard	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	0x00007000-0x00007FFF bridge OK	PCI standard PCI-to-PCI	0xFED00000-0xFED003FF	High precision event
0x00000064-0x00000064 Standard Microsoft Natural PS/2 Keyboard	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	0x00007000-0x00007FFF Controller (Non-Miniport)	Smart Array P800 OK	0xD96E0000-0xD96E0FFF	Standard OpenHCD USB
0x0000002E-0x0000002F	Extended IO Bus	0x00006400-0x000064FF Controller (Non-Miniport)	Smart Array P600 OK	0xD96D0000-0xD96D00FF	Standard Enhanced PCI
0x00000620-0x0000065F	Extended IO Bus	0x00008000-0x00008FFF Controller (Non-Miniport)	Smart Array P800 OK	0xD98F0000-0xD98FFFFF	to USB Host Controller OK
0x00000680-0x0000069F	Extended IO Bus			0xD98E0000-0xD98E01FF	ATI ES1000 OK
0x00000600-0x0000061F	Extended IO Bus			0xD98D0000-0xD98D07FF	Base System Device OK
0x00000660-0x0000067F	Extended IO Bus			0xD98C0000-0xD98C1FFF	Base System Device OK
0x00000300-0x0000030F	Extended IO Bus			0xD9800000-0xD987FFFF	Base System Device OK
0x00000500-0x0000050F PCI IDE Controller OK	Standard Dual Channel			0xD97F0000-0xD97F00FF	PCI Device OK
0x000001F0-0x000001F7	Primary IDE Channel OK			0xD9D00000-0xD9EFFFFF	PCI standard PCI-to-PCI
0x000003F6-0x000003F6	Primary IDE Channel OK	IRQ 0 System timer OK		0xD9E00000-0xD9EFFFFF	bridge OK
0x00000170-0x00000177 OK	Secondary IDE Channel	IRQ 1 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK		0xD9F00000-0xD9DFOFFF	Smart Array E500 Controller (Non-Miniport) OK
0x00000376-0x00000376 OK	Secondary IDE Channel	IRQ 12 PS/2 Compatible Mouse OK		0xD9DFO000-0xD9DFOFFF	Smart Array E500 Controller (Non-Miniport) OK
0x000002800-0x0000028FF	Base System Device OK	IRQ 22 Standard OpenHCD USB Host Controller OK		0xD9800000-0xD9CFFFFF	PCI standard PCI-to-PCI
		IRQ 23 Standard Enhanced PCI to USB Host Controller OK		0xD9C00000-0xD9CFFFFF	Smart Array P800 Controller (Non-Miniport) OK
		IRQ 14 Primary IDE Channel OK		0xD9BF0000-0xD9BF0FFF	Smart Array P800 Controller (Non-Miniport) OK
		IRQ 18 ATI ES1000 OK		0xD9900000-0xD9AFFFFF	PCI standard PCI-to-PCI
		IRQ 18 Smart Array P800 Controller (Non-Miniport) OK		0xD9A00000-0xD9AFFFFF	Smart Array P800 Controller (Non-Miniport) OK
		IRQ 10 Base System Device OK		0xD9A00000-0xD9AFFFFF	Smart Array P800 Controller (Non-Miniport) OK
		IRQ 10 PCI Device OK			
		IRQ 11 Base System Device OK			
		IRQ 17 Standard Universal PCI to USB Host Controller OK			

```

0xD99F0000-0xD99F0FFF Smart Array P800
Controller (Non-Miniport) OK
0xD96F0000-0xD96F0FFF Advanced programmable
interrupt controller OK
0xD9F00000-0xD9FFFFFF PCI bus OK
0xE4000000-0xE7FFFFFF PCI bus OK
0xDPD00000-0xDPEFFFFFF PCI standard PCI-to-PCI
bridge OK
0xDPF00000-0xDPEFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xDPDF0000-0xDPEP0FFF Smart Array P800
Controller (Non-Miniport) OK
0xDPB00000-0xDPCFFFFFF PCI standard PCI-to-PCI
bridge OK
0xDPF00000-0xDPCFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xDPBF0000-0xDPEP0FFF Smart Array P800
Controller (Non-Miniport) OK
0xDPF00000-0xDFAFFFFFF PCI standard PCI-to-PCI
bridge OK
0xDPF00000-0xDFAFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xDPF90000-0xD9F00FFF Smart Array P800
Controller (Non-Miniport) OK
0xDP7F0000-0xDPE8FFFFFF PCI standard PCI-to-PCI
bridge OK
0xDPF80000-0xDPE8FFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xDP7F0000-0xDPE70FFF Smart Array P800
Controller (Non-Miniport) OK
0xDA000000-0xDPEFFFFFF PCI standard PCI-to-PCI
bridge OK
0xDA000000-0xDDFFFFFF HP NC371i Virtual Bus
Device OK
0xDC000000-0xDDFFFFFF HP NC371i Virtual Bus
Device OK
0xDPF60000-0xDPE6FFFFFF PCI standard PCI-to-PCI
bridge OK
0xDPF6F0000-0xDPE6F3FFF LSI Adapter, SAS 3000
series, 8-port with 1068 -StorPort OK
0xDPF6E0000-0xDPE6EFFFFF LSI Adapter, SAS 3000
series, 8-port with 1068 -StorPort OK
0xDPF6D0000-0xDPE6D1FFF Smart Array P600
Controller (Non-Miniport) OK
0xDPF680000-0xDPE6BFFFF Smart Array P600
Controller (Non-Miniport) OK
0xDP9FD0000-0xD9FD0FFF Advanced programmable
interrupt controller OK
0xDP9FE0000-0xD9F00FFF Advanced programmable
interrupt controller OK
0xDFF00000-0xD9FF0FFF Advanced programmable
interrupt controller OK

```

[Components]

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description		
	Status	File	Version	Size
c:\windows\system32\imaadp32.acm	Microsoft Corporation	C:\WINDOWS\system32\IMAADP32.ACM	OK	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
				24.00 KB (24,576 bytes)
				11/30/2005 6:00 AM
c:\windows\system32\tssoft32.acm	DSP GROUP, INC.	C:\WINDOWS\system32\TSSOFT32.ACM	OK	1.01 13.50 KB (13,824 bytes)
				11/30/2005 6:00 AM
c:\windows\system32\msgsm32.acm	Microsoft Corporation	C:\WINDOWS\system32\MSGSM32.ACM	OK	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
				34.50 KB (35,328 bytes)
				11/30/2005 6:00 AM
c:\windows\system32\msadp32.acm	Microsoft Corporation	C:\WINDOWS\system32\MSADP32.ACM	OK	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
				23.50 KB (24,064 bytes)
				11/30/2005 6:00 AM
c:\windows\system32\msg711.acm	Microsoft Corporation	C:\WINDOWS\system32\MSG711.ACM	OK	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
				13.50 KB (13,824 bytes)
				11/30/2005 6:00 AM
[Video Codecs]				
CODEC	Manufacturer	Description		
	Status	File	Version	Size
c:\windows\system32\msrle32.dll	Microsoft Corporation	C:\WINDOWS\system32\MSRLE32.DLL	OK	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
				15.50 KB (15,872 bytes)
				11/30/2005 6:00 AM
c:\windows\system32\msvidc32.dll	Microsoft Corporation	C:\WINDOWS\system32\MSVIDC32.DLL	OK	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
				43.00 KB (44,032 bytes)
				11/30/2005 6:00 AM
c:\windows\system32\iyuv_32.dll	Microsoft Corporation	C:\WINDOWS\system32\IYUV_32.DLL	OK	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
				52.50 KB (53,760 bytes)
				3/24/2005 11:19 AM
c:\windows\system32\msyuv.dll	Microsoft Corporation	C:\WINDOWS\system32\MSYUV.DLL	OK	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
				21.00 KB (21,504 bytes)
				3/24/2005 11:21 AM

Item	Value
Corporation	OK
	C:\WINDOWS\system32\TSBYUV.DLL
	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
	12.50 KB (12,800 bytes)
	3/24/2005 11:34 AM
[CD-ROM]	
Item	Value
Drive	D:
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	TEAC DW-224E-V
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROMTEAC_DW-224E-V
	C.CA_\5&2270D2F8&0&0.0.
0	
Driver	c:\windows\system32\drivers\cdrom.sys
	(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 75.50 KB
	(77,312 bytes), 11/30/2005 6:00 AM)
[Sound Device]	
Item	Value
[Display]	
Item	Value
Name	ATI ES1000
PNP Device ID	PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
2\4&21887AE0&1848	
Adapter Type	ATI ES1000 (0x515E), ATI Technologies Inc. compatible
Adapter Description	ATI ES1000
Adapter RAM	32.00 MB (33,554,432 bytes)
Installed Drivers	ati2vag.dll
Driver Version	6.14.10.6606
INF File	oem15.inf (ati2mtag_RN50 section)
Color Planes	1
Color Table Entries	4294967296
Resolution	1024 x 768 x 60 hertz
Bits/Pixel	32
Memory Address	0xD0000000-0xD9FFFFFF
I/O Port	0x00001000-0x00005FFF
Memory Address	0xD98F0000-0xD98FFFFFF
IRQ Channel	IRQ 18
I/O Port	0x000003B0-0x000003BB
I/O Port	0x000003C0-0x000003DF
Memory Address	0xA0000-0xBFFFF
Driver	c:\windows\system32\drivers\ati2mtag.sys
	(6.14.10.6606, 2.11 MB (2,210,304 bytes), 9/11/2007
	10:53 AM)
[Infrared]	
Item	Value

[Input]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&142B453B&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 91.00 KB (93,184 bytes), 11/30/2005 6:00 AM)
Description	USB Human Interface Device
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	USB\VID_03F0&PID_1027&MI_00\7&3B124F76&0&00
00	
Number of Function Keys	12
Driver	c:\windows\system32\drivers\hidusb.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 18.50 KB (18,944 bytes), 11/30/2005 6:00 AM)

[Pointing Device]

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	5
Status	OK
PNP Device ID	ACPI\PNP0F13\4&142B453B&0
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
IRQ Channel	IRQ 12
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 91.00 KB (93,184 bytes), 11/30/2005 6:00 AM)
Hardware Type	USB Human Interface Device
Number of Buttons	5
Status	OK
PNP Device ID	USB\VID_03F0&PID_1027&MI_01\7&3B124F76&0&00
01	
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
Driver	c:\windows\system32\drivers\hidusb.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 18.50 KB (18,944 bytes), 11/30/2005 6:00 AM)

[Modem]

Item Value

[Network]

[Adapter]

Item	Value
Name	[00000001] RAS Async Adapter
Adapter Type	Not Available
Product Type	RAS Async Adapter
Installed Yes	
PNP Device ID	Not Available
Last Reset	10/21/2008 2:19 PM
Index	1
Service Name	AsyncMac
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000002] WAN Miniport (L2TP)
Adapter Type	Not Available
Product Type	WAN Miniport (L2TP)
Installed Yes	
PNP Device ID	ROOT\MS_L2TPMINIPORT\0000
Last Reset	10/21/2008 2:19 PM
Index	2
Service Name	Rasl2tp
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\rasl2tp.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 132.00 KB (135,168 bytes), 11/30/2005 6:00 AM)
Name	[00000003] WAN Miniport (PPTP)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPTP)
Installed Yes	
PNP Device ID	ROOT\MS_PPTPMINIPORT\0000
Last Reset	10/21/2008 2:19 PM
Index	3
Service Name	PptpMiniport
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	50:50:54:50:30:30

Driver	c:\windows\system32\drivers\raspppt.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 117.50 KB (120,320 bytes), 11/30/2005 6:00 AM)
--------	--

Name	[00000004] WAN Miniport (PPPOE)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPPOE)
Installed Yes	

PNP Device ID	ROOT\MS_PPPOEMINIPORT\0000
Last Reset	10/21/2008 2:19 PM

Index	4
-------	---

Service Name	Rasppoe
--------------	---------

IP Address	Not Available
------------	---------------

IP Subnet Not Available	
-------------------------	--

Default IP Gateway	Not Available
--------------------	---------------

DHCP Enabled	No
--------------	----

DHCP Server	Not Available
-------------	---------------

DHCP Lease Expires	Not Available
--------------------	---------------

DHCP Lease Obtained	Not Available
---------------------	---------------

MAC Address	33:50:6F:45:30:30
-------------	-------------------

Driver	c:\windows\system32\drivers\rasppoe.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 67.50 KB (69,120 bytes), 11/30/2005 6:00 AM)
--------	--

Name	[00000005] Direct Parallel
------	----------------------------

Adapter Type	Not Available
--------------	---------------

Product Type	Direct Parallel
--------------	-----------------

Installed Yes	
---------------	--

PNP Device ID	ROOT\MS_PTIMINIPORT\0000
---------------	--------------------------

Last Reset	10/21/2008 2:19 PM
------------	--------------------

Index	5
-------	---

Service Name	Raspti
--------------	--------

IP Address	Not Available
------------	---------------

IP Subnet Not Available	
-------------------------	--

Default IP Gateway	Not Available
--------------------	---------------

DHCP Enabled	No
--------------	----

DHCP Server	Not Available
-------------	---------------

DHCP Lease Expires	Not Available
--------------------	---------------

DHCP Lease Obtained	Not Available
---------------------	---------------

MAC Address	Not Available
-------------	---------------

Driver	c:\windows\system32\drivers\raspti.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 30.50 KB (31,232 bytes), 11/30/2005 6:00 AM)
--------	---

Name	[00000006] WAN Miniport (IP)
------	------------------------------

Adapter Type	Not Available
--------------	---------------

Product Type	WAN Miniport (IP)
--------------	-------------------

Installed Yes	
---------------	--

PNP Device ID	ROOT\MS_NDISWANIP\0000
---------------	------------------------

Last Reset	10/21/2008 2:19 PM
------------	--------------------

Index	6
-------	---

Service Name	NdisWan
--------------	---------

IP Address	Not Available
------------	---------------

IP Subnet Not Available	
-------------------------	--

Default IP Gateway	Not Available
--------------------	---------------

DHCP Enabled	No
--------------	----

DHCP Server	Not Available
-------------	---------------

DHCP Lease Expires	Not Available
--------------------	---------------

DHCP Lease Obtained	Not Available
---------------------	---------------

MAC Address	Not Available
-------------	---------------

Driver c:\windows\system32\drivers\ndiswan.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710)), 157.50 KB
(161,280 bytes), 11/30/2005 6:00 AM)

Name [00000007] HP NC371i Multifunction Gigabit
Server Adapter
Adapter Type Ethernet 802.3
Product Type HP NC371i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID
B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
EV_02\5&B64F98D&0&20054101
Last Reset 10/21/2008 2:19 PM
Index 7
Service Name 12nd
IP Address 130.168.208.10, 130.122.208.10

IP Subnet 255.255.0.0, 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:1E:0B:BA:D6:D0
Driver c:\windows\system32\drivers\bxnd52a.sys
(4.5.4.0 built by: WinDDK, 68.00 KB (69,632 bytes),
9/10/2007 5:30 PM)

Name [00000008] HP NC371i Multifunction Gigabit
Server Adapter
Adapter Type Ethernet 802.3
Product Type HP NC371i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID
B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
EV_02\5&2945E16&0&20054102
Last Reset 10/21/2008 2:19 PM
Index 8
Service Name 12nd
IP Address 130.120.208.10, 130.121.208.10

IP Subnet 255.255.0.0, 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:1E:0B:BA:D6:D2
Driver c:\windows\system32\drivers\bxnd52a.sys
(4.5.4.0 built by: WinDDK, 68.00 KB (69,632 bytes),
9/10/2007 5:30 PM)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes

Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name MSAFD Tcpip [UDP/IP]
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name RSVP UDP Service Provider
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name RSVP TCP Service Provider
Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting No
Supports Connect Data No

Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

[WinSock]

Item	Value
File	c:\windows\system32\wsock32.dll
Size	24.50 KB (25,088 bytes)
Version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)

[Ports]

[Serial]

Item	Value
------	-------

[Parallel]

Item	Value
------	-------

[Storage]

[Drives]

Item	Value
Drive	C:
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	33.51 GB (35,985,563,648 bytes)
Free Space	20.35 GB (21,847,879,680 bytes)
Volume Name	
Volume Serial Number	683092C4
Drive	D:
Description	CD-ROM Disc
Drive	E:
Description	Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available
Drive	F:
Description	Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available

```

Volume Name      Not Available
Volume Serial Number  Not Available

Drive       U:
Description   Local Fixed Disk
Compressed    No
File System   NTFS
Size        1.28 TB (1,410,331,148,288 bytes)
Free Space   96.68 GB (103,808,303,104 bytes)

Volume Name      back1
Volume Serial Number  D4FE9FF7

Drive       V:
Description   Local Fixed Disk
Compressed    No
File System   NTFS
Size        1.28 TB (1,410,331,148,288 bytes)
Free Space   96.69 GB (103,817,334,784 bytes)

Volume Name      back2
Volume Serial Number  C00993AA

Drive       W:
Description   Local Fixed Disk
Compressed    No
File System   NTFS
Size        1.28 TB (1,410,331,148,288 bytes)
Free Space   96.69 GB (103,817,355,264 bytes)

Volume Name      back3
Volume Serial Number  741AE674

Drive       X:
Description   Local Fixed Disk
Compressed    No
File System   NTFS
Size        1.28 TB (1,410,331,148,288 bytes)
Free Space   96.69 GB (103,817,355,264 bytes)

Volume Name      back4
Volume Serial Number  442628B9

Drive       Y:
Description   Local Fixed Disk
Compressed    No
File System   NTFS
Size        1.28 TB (1,410,331,148,288 bytes)
Free Space   96.69 GB (103,817,355,264 bytes)

Volume Name      back5
Volume Serial Number  E03DA367

Drive       Z:
Description   Local Fixed Disk
Compressed    No
File System   NTFS
Size        1.28 TB (1,410,331,148,288 bytes)
Free Space   96.69 GB (103,817,355,264 bytes)

Volume Name      back6
Volume Serial Number  EC86D980

```

```

[Disks]

Item      Value
Description  \\.\PHYSICALDRIVE29
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type   Fixed hard disk
Partitions   1
SCSI Bus  Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size        273.44 GB (293,601,369,600 bytes)
Total Cylinders 35,695
Total Sectors 573,440,175
Total Tracks 9,102,225
Tracks/Cylinder 255
Partition Disk #29, Partition #0
Partition Size 273.43 GB (293,593,112,064 bytes)

Partition Starting Offset 32,256 bytes

Description  \\.\PHYSICALDRIVE30
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type   Fixed hard disk
Partitions   1
SCSI Bus  Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size        58.59 GB (62,915,166,720 bytes)
Total Cylinders 7,649
Total Sectors 122,881,185
Total Tracks 1,950,495
Tracks/Cylinder 255
Partition Disk #32, Partition #0
Partition Size 58.59 GB (62,906,909,184 bytes)

Partition Starting Offset 32,256 bytes

Description  \\.\PHYSICALDRIVE31
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type   Fixed hard disk
Partitions   1
SCSI Bus  Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size        205.08 GB (220,198,970,880 bytes)
Total Cylinders 26,771
Total Sectors 430,076,115
Total Tracks 6,826,605
Tracks/Cylinder 255
Partition Disk #30, Partition #0
Partition Size 205.08 GB (220,198,938,624 bytes)

Partition Starting Offset 32,256 bytes

Description  \\.\PHYSICALDRIVE31
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type   Fixed hard disk
Partitions   1
SCSI Bus  Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size        1.28 TB (1,410,331,184,640 bytes)
Total Cylinders 171,463
Total Sectors 2,754,553,095
Total Tracks 43,723,065
Tracks/Cylinder 255
Partition Disk #33, Partition #0
Partition Size 1.28 TB (1,410,331,152,384 bytes)

Partition Starting Offset 32,256 bytes

Description  \\.\PHYSICALDRIVE14
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type   Fixed hard disk
Partitions   1
SCSI Bus  Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

```

```

Total Sectors 471,025,800
Total Tracks 7,476,600
Tracks/Cylinder 255
Partition Disk #31, Partition #0
Partition Size 224.60 GB (241,165,177,344 bytes)

Partition Starting Offset 32,256 bytes

Description  \\.\PHYSICALDRIVE32
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type   Fixed hard disk
Partitions   1
SCSI Bus  Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size        58.59 GB (62,915,166,720 bytes)
Total Cylinders 7,649
Total Sectors 122,881,185
Total Tracks 1,950,495
Tracks/Cylinder 255
Partition Disk #32, Partition #0
Partition Size 58.59 GB (62,906,909,184 bytes)

Partition Starting Offset 32,256 bytes

Description  \\.\PHYSICALDRIVE33
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type   Fixed hard disk
Partitions   1
SCSI Bus  Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size        1.28 TB (1,410,331,184,640 bytes)
Total Cylinders 171,463
Total Sectors 2,754,553,095
Total Tracks 43,723,065
Tracks/Cylinder 255
Partition Disk #33, Partition #0
Partition Size 1.28 TB (1,410,331,152,384 bytes)

Partition Starting Offset 32,256 bytes

Description  \\.\PHYSICALDRIVE14
Manufacturer Not Available
Model      Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type   Fixed hard disk
Partitions   1
SCSI Bus  Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

```

SCSI Target ID Not Available
 Sectors/Track 63
 Size 273.44 GB (293,601,369,600 bytes)
 Total Cylinders 35,695
 Total Sectors 573,440,175
 Total Tracks 9,102,225
 Tracks/Cylinder 255
 Partition Disk #14, Partition #0
 Partition Size 273.43 GB (293,593,112,064 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE15
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 205.08 GB (220,198,970,880 bytes)
 Total Cylinders 26,771
 Total Sectors 430,076,115
 Total Tracks 6,826,605
 Tracks/Cylinder 255
 Partition Disk #15, Partition #0
 Partition Size 205.08 GB (220,198,938,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE16
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 224.60 GB (241,165,209,600 bytes)
 Total Cylinders 29,320
 Total Sectors 471,025,800
 Total Tracks 7,476,600
 Tracks/Cylinder 255
 Partition Disk #16, Partition #0
 Partition Size 224.60 GB (241,165,177,344 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE17
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk

Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)
 Total Cylinders 7,649
 Total Sectors 122,881,185
 Total Tracks 1,950,495
 Tracks/Cylinder 255
 Partition Disk #17, Partition #0
 Partition Size 58.59 GB (62,906,909,184 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE18
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 1.28 TB (1,410,331,184,640 bytes)
 Total Cylinders 171,463
 Total Sectors 2,754,553,095
 Total Tracks 43,723,065
 Tracks/Cylinder 255
 Partition Disk #18, Partition #0
 Partition Size 1.28 TB (1,410,331,152,384 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE0
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 273.44 GB (293,601,369,600 bytes)
 Total Cylinders 35,695
 Total Sectors 573,440,175
 Total Tracks 9,102,225
 Tracks/Cylinder 255
 Partition Disk #0, Partition #0
 Partition Size 273.43 GB (293,593,112,064 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE1
 Manufacturer Not Available

Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 205.08 GB (220,198,970,880 bytes)
 Total Cylinders 26,771
 Total Sectors 430,076,115
 Total Tracks 6,826,605
 Tracks/Cylinder 255
 Partition Disk #1, Partition #0
 Partition Size 205.08 GB (220,198,938,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE2
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 224.60 GB (241,165,209,600 bytes)
 Total Cylinders 29,320
 Total Sectors 471,025,800
 Total Tracks 7,476,600
 Tracks/Cylinder 255
 Partition Disk #2, Partition #0
 Partition Size 224.60 GB (241,165,177,344 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE3
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)
 Total Cylinders 7,649
 Total Sectors 122,881,185
 Total Tracks 1,950,495
 Tracks/Cylinder 255
 Partition Disk #3, Partition #0
 Partition Size 58.59 GB (62,906,909,184 bytes)

Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE4
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 273.44 GB (293,601,369,600 bytes)
 Total Cylinders 35,695
 Total Sectors 573,440,175
 Total Tracks 9,102,225
 Tracks/Cylinder 255
 Partition Disk #4, Partition #0
 Partition Size 273.43 GB (293,593,112,064 bytes)

Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE5
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 205.08 GB (220,198,970,880 bytes)
 Total Cylinders 26,771
 Total Sectors 430,076,115
 Total Tracks 6,826,605
 Tracks/Cylinder 255
 Partition Disk #5, Partition #0
 Partition Size 205.08 GB (220,198,938,624 bytes)

Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE6
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 224.60 GB (241,165,209,600 bytes)
 Total Cylinders 29,320
 Total Sectors 471,025,800
 Total Tracks 7,476,600

Tracks/Cylinder 255
 Partition Disk #6, Partition #0
 Partition Size 224.60 GB (241,165,177,344 bytes)

Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE7
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)
 Total Cylinders 7,649
 Total Sectors 122,881,185
 Total Tracks 1,950,495
 Tracks/Cylinder 255
 Partition Disk #7, Partition #0
 Partition Size 58.59 GB (62,906,909,184 bytes)

Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE8
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 1.28 TB (1,410,331,184,640 bytes)
 Total Cylinders 171,463
 Total Sectors 2,754,553,095
 Total Tracks 43,723,065
 Tracks/Cylinder 255
 Partition Disk #8, Partition #0
 Partition Size 1.28 TB (1,410,331,152,384 bytes)

Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE19
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63

Size 273.44 GB (293,601,369,600 bytes)
 Total Cylinders 35,695
 Total Sectors 573,440,175
 Total Tracks 9,102,225
 Tracks/Cylinder 255
 Partition Disk #19, Partition #0
 Partition Size 273.43 GB (293,593,112,064 bytes)

Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE20
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 205.08 GB (220,198,970,880 bytes)
 Total Cylinders 26,771
 Total Sectors 430,076,115
 Total Tracks 6,826,605
 Tracks/Cylinder 255
 Partition Disk #20, Partition #0
 Partition Size 205.08 GB (220,198,938,624 bytes)

Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE21
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 224.60 GB (241,165,209,600 bytes)
 Total Cylinders 29,320
 Total Sectors 471,025,800
 Total Tracks 7,476,600
 Tracks/Cylinder 255
 Partition Disk #21, Partition #0
 Partition Size 224.60 GB (241,165,177,344 bytes)

Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE22
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available

SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)
 Total Cylinders 7,649
 Total Sectors 122,881,185
 Total Tracks 1,950,495
 Tracks/Cylinder 255
 Partition Disk #22, Partition #0
 Partition Size 58.59 GB (62,906,909,184 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE23
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 1.28 TB (1,410,331,184,640 bytes)
 Total Cylinders 171,463
 Total Sectors 2,754,553,095
 Total Tracks 43,723,065
 Tracks/Cylinder 255
 Partition Disk #23, Partition #0
 Partition Size 1.28 TB (1,410,331,152,384 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE24
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 273.44 GB (293,601,369,600 bytes)
 Total Cylinders 35,695
 Total Sectors 573,440,175
 Total Tracks 9,102,225
 Tracks/Cylinder 255
 Partition Disk #24, Partition #0
 Partition Size 273.43 GB (293,593,112,064 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE25
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512

Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 205.08 GB (220,198,970,880 bytes)
 Total Cylinders 26,771
 Total Sectors 430,076,115
 Total Tracks 6,826,605
 Tracks/Cylinder 255
 Partition Disk #25, Partition #0
 Partition Size 205.08 GB (220,198,938,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE26
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 224.60 GB (241,165,209,600 bytes)
 Total Cylinders 29,320
 Total Sectors 471,025,800
 Total Tracks 7,476,600
 Tracks/Cylinder 255
 Partition Disk #26, Partition #0
 Partition Size 224.60 GB (241,165,177,344 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE27
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)
 Total Cylinders 7,649
 Total Sectors 122,881,185
 Total Tracks 1,950,495
 Tracks/Cylinder 255
 Partition Disk #27, Partition #0
 Partition Size 58.59 GB (62,906,909,184 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE28
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 1.28 TB (1,410,331,184,640 bytes)
 Total Cylinders 171,463
 Total Sectors 2,754,553,095
 Total Tracks 43,723,065
 Tracks/Cylinder 255
 Partition Disk #28, Partition #0
 Partition Size 1.28 TB (1,410,331,152,384 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE34
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 1.91 TB (2,097,150,289,920 bytes)
 Total Cylinders 254,964
 Total Sectors 4,095,996,660
 Total Tracks 65,015,820
 Tracks/Cylinder 255
 Partition Disk #34, Partition #0
 Partition Size 1.91 TB (2,097,150,257,664 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE35
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 97.39 GB (104,567,984,640 bytes)
 Total Cylinders 12,713
 Total Sectors 204,234,345
 Total Tracks 3,241,815
 Tracks/Cylinder 255
 Partition Disk #35, Partition #0

Partition Size 97.39 GB (104,567,952,384 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE9
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 273.44 GB (293,601,369,600 bytes)
 Total Cylinders 35,695
 Total Sectors 573,440,175
 Total Tracks 9,102,225
 Tracks/Cylinder 255
 Partition Disk #9, Partition #0
 Partition Size 273.43 GB (293,593,112,064 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE10
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 205.08 GB (220,198,970,880 bytes)
 Total Cylinders 26,771
 Total Sectors 430,076,115
 Total Tracks 6,826,605
 Tracks/Cylinder 255
 Partition Disk #10, Partition #0
 Partition Size 205.08 GB (220,198,938,624 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE11
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 224.60 GB (241,165,209,600 bytes)
 Total Cylinders 29,320

Total Sectors 471,025,800
 Total Tracks 7,476,600
 Tracks/Cylinder 255
 Partition Disk #11, Partition #0
 Partition Size 224.60 GB (241,165,177,344 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE12
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)
 Total Cylinders 7,649
 Total Sectors 122,881,185
 Total Tracks 1,950,495
 Tracks/Cylinder 255
 Partition Disk #12, Partition #0
 Partition Size 58.59 GB (62,906,909,184 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE13
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 1.28 TB (1,410,331,184,640 bytes)
 Total Cylinders 171,463
 Total Sectors 2,754,553,095
 Total Tracks 43,723,065
 Tracks/Cylinder 255
 Partition Disk #13, Partition #0
 Partition Size 1.28 TB (1,410,331,152,384 bytes)
 Partition Starting Offset 32,256 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model LSILOGIC Logical Volume SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0

SCSI Port 2
 SCSI Target ID 1
 Sectors/Track 63
 Size 33.52 GB (35,993,825,280 bytes)
 Total Cylinders 4,376
 Total Sectors 70,300,440
 Total Tracks 1,115,880
 Tracks/Cylinder 255
 Partition Disk #36, Partition #0
 Partition Size 33.51 GB (35,985,567,744 bytes)
 Partition Starting Offset 32,256 bytes
 [SCSI]
 Item Value
 Name Smart Array E500 Controller (Non-Miniport)
 Manufacturer Hewlett-Packard
 Status OK
 PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_0
 3\4&22FEBB0D&0&0060
 Memory Address 0xD9E00000-0xD9EFFFFF
 I/O Port 0x00005000-0x00005FFF
 Memory Address 0xD9DF0000-0xD9DF0FFF
 IRQ Channel IRQ 16
 Driver c:\windows\system32\drivers\hpqcissb.sys
 (6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26
 KB (61,704 bytes), 9/11/2007 10:25 AM)
 Name Smart Array P800 Controller (Non-Miniport)
 Manufacturer Hewlett-Packard
 Status OK
 PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 3\4&B98F5C4&0&0068
 Memory Address 0xD9C00000-0xD9CFFFFF
 I/O Port 0x00004000-0x00004FFF
 Memory Address 0xD9BF0000-0xD9BF0FFF
 IRQ Channel IRQ 19
 Driver c:\windows\system32\drivers\hpqcissb.sys
 (6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26
 KB (61,704 bytes), 9/11/2007 10:25 AM)
 Name Smart Array P800 Controller (Non-Miniport)
 Manufacturer Hewlett-Packard
 Status OK
 PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 3\4&13700CED&0&0070
 Memory Address 0xD9A00000-0xD9AFFFFF
 I/O Port 0x00003000-0x00003FFF
 Memory Address 0xD99F0000-0xD99F0FFF
 IRQ Channel IRQ 18
 Driver c:\windows\system32\drivers\hpqcissb.sys
 (6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26
 KB (61,704 bytes), 9/11/2007 10:25 AM)

Name	Smart Array P800 Controller (Non-Miniport)
Manufacturer	Hewlett-Packard
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
	3\4&300C8240&0&0058
Memory Address	0x0FE00000-0xDFFFFFFF
I/O Port	0x0000A000-0x0000AFFF
Memory Address	0x0DFD0000-0x0DFD0FFF
IRQ Channel	IRQ 55
Driver	c:\windows\system32\drivers\hpqcissb.sys (6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 9/11/2007 10:25 AM)
Name	Smart Array P800 Controller (Non-Miniport)
Manufacturer	Hewlett-Packard
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
	3\4&137ABEAA&0&0060
Memory Address	0x0FC00000-0x0DFCFFFF
I/O Port	0x00009000-0x00009FFF
Memory Address	0x0FBF0000-0x0DFBF0FFF
IRQ Channel	IRQ 54
Driver	c:\windows\system32\drivers\hpqcissb.sys (6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 9/11/2007 10:25 AM)
Name	Smart Array P800 Controller (Non-Miniport)
Manufacturer	Hewlett-Packard
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
	3\4&1B1CF5E760&0068
Memory Address	0x0DFA00000-0x0DFAFFFF
I/O Port	0x00008000-0x00008FFF
Memory Address	0x0DF9F0000-0x0DF9F0FFF
IRQ Channel	IRQ 57
Driver	c:\windows\system32\drivers\hpqcissb.sys (6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 9/11/2007 10:25 AM)
Name	Smart Array P800 Controller (Non-Miniport)
Manufacturer	Hewlett-Packard
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
	3\4&3EC0CCA&0&0070
Memory Address	0x0DF800000-0x0DF8FFFF
I/O Port	0x00007000-0x00007FFF
Memory Address	0x0DF7F0000-0x0DF7F0FFF
IRQ Channel	IRQ 56
Driver	c:\windows\system32\drivers\hpqcissb.sys (6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 9/11/2007 10:25 AM)
Name	LSI Adapter, SAS 3000 series, 8-port with 1068 -StorPort

Manufacturer	LSI Logic
Status	OK
PNP Device ID	PCI\VEN_1000&DEV_0054&SUBSYS_3228103C&REV_0
	0\4&24CF26E8&0&0888
I/O Port	0x00006000-0x0000FFFF
Memory Address	0x0DF6F0000-0x0DF6F3FFF
Memory Address	0x0DF6E0000-0x0DF6EFFFF
IRQ Channel	IRQ 24
Driver	c:\windows\system32\drivers\lsi_sas.sys (1.24.04.00 built by: WinDDK, 125.00 KB (128,000 bytes), 9/10/2007 10:42 AM)
Name	Smart Array P600 Controller (Non-Miniport)
Manufacturer	Hewlett-Packard
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
	0\4&24CF26E8&0&1088
Memory Address	0x0DF6D0000-0x0DF6D1FFF
I/O Port	0x00006400-0x000064FF
Memory Address	0x0DF680000-0x0DF6BFFFF
IRQ Channel	IRQ 26
Driver	c:\windows\system32\drivers\hpqcissb.sys (6.21.64.64 Build x2 (AMD64) built by: phiwong, 60.26 KB (61,704 bytes), 9/11/2007 10:25 AM)
[IDE]	
Item	Value
Name	Standard Dual Channel PCI IDE Controller
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCI\VEN_10DE&DEV_0053&SUBSYS_31F8103C&REV_A
	3\3&20FEA912&0&30
I/O Port	0x00000500-0x0000050F
Driver	c:\windows\system32\drivers\pciiide.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 6.00 KB (6,144 bytes), 11/30/2005 6:00 AM)
Name	Primary IDE Channel
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCIIDE\IDECHANNEL\4&23A0739C&0&0
I/O Port	0x000001F0-0x000001F7
I/O Port	0x000003F6-0x000003F6
IRQ Channel	IRQ 14
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 146.50 KB (150,016 bytes), 11/30/2005 6:00 AM)
Name	Secondary IDE Channel
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK

PNP Device ID	PCIIDE\IDECHANNEL\4&23A0739C&0&1		
I/O Port	0x00000170-0x00000177		
I/O Port	0x00000376-0x00000376		
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 146.50 KB (150,016 bytes), 11/30/2005 6:00 AM)		
[Printing]			
Name	Driver	Port Name	Server Name
[Problem Devices]			
Device	PNP Device ID	Error Code	
Not Available	ACPI\IPI0001\0	The drivers for this device are not installed.	
Base System Device	PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0		
	3\4&21887AE&0&2048	The drivers for this device are not installed.	
Base System Device	PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0		
	3\4&21887AE&0&2248	The drivers for this device are not installed.	
PCI Device	PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0		
	0\4&21887AE&0&2648	The drivers for this device are not installed.	
System Interrupt Controller	PCI\VEN_1022&DEV_7459&SUBSYS_74591022&REV_1		
	2\3&33B859B7&0&81	The drivers for this device are not installed.	
System Interrupt Controller	PCI\VEN_1022&DEV_7459&SUBSYS_74591022&REV_1		
	2\3&33B859B7&0&89	The drivers for this device are not installed.	
[USB]			
Device	PNP Device ID		
Standard OpenHCD USB Host Controller	PCI\VEN_10DE&DEV_005A&SUBSYS_31F8103C&REV_A		
	2\3&20FEA912&0&10		
Standard Enhanced PCI to USB Host Controller	PCI\VEN_10DE&DEV_005B&SUBSYS_31F8103C&REV_A		
	4\3&20FEA912&0&11		
Standard Universal PCI to USB Host Controller	PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0		
	0\4&21887AE&0&2448		
[Software Environment]			
[System Drivers]			
Name	Description	File	Type
Started	Start Mode		State
Status	Error Control		Accept Pause
Accept Stop			

abiosdsk	Abiosdsk	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Ignore	No	No
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
adpu160m	adpu160m	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
adpu320	adpu320	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
afd	AFD	c:\windows\system32\drivers\afd.sys	
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
aic78u2	aic78u2	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
aic78xx	aic78xx	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
aliide	AliIDE	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
amdiide	AmdIde	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
arc	arc	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
asyncmac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asyncmac.sys	
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
atapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys	
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
atdisk	Atdisk	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Ignore	No	No
ati2mtag	ati2mtag	c:\windows\system32\drivers\ati2mtag.sys	
	Kernel Driver	Yes	Manual
	Running	OK	Ignore No Yes
atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys	
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
	audstub	Audio Stub Driver	
	c:\windows\system32\drivers\audstub.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
	b06bdrv	HP Virtual Bus Device	
	c:\windows\system32\drivers\bxvbd.a.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
	beep	Beep	
	c:\windows\system32\drivers\beep.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
	cdac15ba	CdaC15BA	
	c:\windows\system32\drivers\cdac15ba.sys		
	Kernel Driver	Yes	Auto
	Running	OK	Normal No Yes
	cdad10ba	CdaD10BA	
	c:\windows\system32\drivers\cdad10ba.sys		
	Kernel Driver	Yes	Auto
	Running	OK	Normal No Yes
	cdfs	Cdfs	
	c:\windows\system32\drivers\cdfs.sys		
	File System Driver	Yes	Disabled
	Running	OK	Normal No Yes
	cdrom	CD-ROM Driver	
	c:\windows\system32\drivers\cdrom.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
	changer	Changer	Not Available
	No	System	Stopped OK
	Ignore	No	No
	clusdisk	Cluster Disk Driver	
	c:\windows\system32\drivers\clusdisk.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
	cmdide	CmddIde	Not Available
	No	Disabled	Stopped OK
	Normal	No	No
	cpqcissm	cpqcissm	Not Available
	No	Disabled	Stopped OK
	Normal	No	No
	cpqteam	HP Network Configuration Utility	
	c:\windows\system32\drivers\cpqteam.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
	cpuspy3	CpuSpy3 Driver	
	\?c:\windows\system32\drivers\cpuspy3.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
	crcdisk	CRC Disk Filter Driver	
	c:\windows\system32\drivers\crcdisk.sys		
	Kernel Driver	Yes	Boot
	debugexec	DebugExec	Driver
	\??\c:\windows\system32\drivers\debugexec.s		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
	dfsdriver	DfsDriver	
	c:\windows\system32\drivers\dfs.sys		
	File System Driver	Yes	Boot
	Running	OK	Normal No Yes
	disk	Disk Driver	
	c:\windows\system32\drivers\disk.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
	dmboot	dmboot	
	c:\windows\system32\drivers\dmboot.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
	dmio	Logical Disk Manager Driver	
	c:\windows\system32\drivers\dmio.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
	dmload	dmload	
	c:\windows\system32\drivers\dmload.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
	dpti2o	dpti2o	Not Available
	No	Disabled	Stopped OK
	Normal	No	No
	elxstor	elxstor	Not Available
	No	Disabled	Stopped OK
	Normal	No	No
	fastfat	Fastfat	
	c:\windows\system32\drivers\fastfat.sys		
	File System Driver	No	Disabled
	Stopped	OK	Normal No No
	fdc	Fdc	
	c:\windows\system32\drivers\fdc.sys		
	Kernel Driver	No	System
	Stopped	OK	Ignore No No
	fips	Fips	
	c:\windows\system32\drivers\fips.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
	flpydisk	Flpydisk	
	c:\windows\system32\drivers\flpydisk.sys		
	Kernel Driver	No	System
	Stopped	OK	Ignore No No
	fltmgr	FltMgr	
	c:\windows\system32\drivers\fltmgr.sys		
	File System Driver	Yes	Boot

		Running	OK	Normal	No	Yes
ftdisk	Volume Manager Driver c:\windows\system32\drivers\ftdisk.sys	Kernel Driver Yes	Boot	Running	OK	Normal No Yes
gpc	Generic Packet Classifier c:\windows\system32\drivers\msgpc.sys	Kernel Driver Yes	Manual	Running	OK	Normal No Yes
hidusb	Microsoft HID Class Driver c:\windows\system32\drivers\hidusb.sys	Kernel Driver Yes	Manual	Running	OK	Ignore No Yes
hpciss	hpciss c:\windows\system32\drivers\hpciss.sys	Kernel Driver Yes	Boot	Running	OK	Normal No Yes
hpciss2	HpCISs2 c:\windows\system32\drivers\hpciss2.sys	Kernel Driver Yes	Boot	Running	OK	Normal No Yes
hpqcissb	Smart Array Controllers Non-Miniport Bus Driver c:\windows\system32\drivers\hpqcissb.sys	Kernel Driver Yes	Boot	Running	OK	Normal No Yes
hpqcissd	Smart Array Controllers Non-Miniport Disk Driver c:\windows\system32\drivers\hpqcissd.sys	Kernel Driver Yes	Boot	Running	OK	Normal No Yes
http	HTTP c:\windows\system32\drivers\http.sys	Kernel Driver No	Manual	Stopped	OK	Normal No No
i20mgmt	i20mgmt Not Available Kernel Driver No System Stopped OK Normal No No					
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver c:\windows\system32\drivers\i8042prt.sys	Kernel Driver Yes	System	Running	OK	Normal No Yes
iirsp	iirsp Not Available Kernel Driver No Disabled Stopped OK Normal No No					
imapi	CD-Burning Filter Driver c:\windows\system32\drivers\imapi.sys	Kernel Driver Yes	System	Running	OK	Normal No Yes
intelide	IntelIDE Not Available Kernel Driver No Disabled Stopped OK Normal No No					
		ip6fw	IPv6 Windows Firewall Driver c:\windows\system32\drivers\ip6fw.sys	Kernel Driver No	Manual	Stopped OK Normal No No
		ipfilterdriver	IP Traffic Filter Driver c:\windows\system32\drivers\ipfltdrv.sys	Kernel Driver No	Manual	Stopped OK Normal No No
		ipinip	IP in IP Tunnel Driver c:\windows\system32\drivers\ipinip.sys	Kernel Driver No	Manual	Stopped OK Normal No No
		ipnat	IP Network Address Translator c:\windows\system32\drivers\ipnat.sys	Kernel Driver No	Manual	Stopped OK Normal No No
		ipsec	IPSEC driver c:\windows\system32\drivers\ipsec.sys	Kernel Driver Yes	System	Running OK Normal No Yes
		isapnp	PnP ISA/EISA Bus Driver c:\windows\system32\drivers\isapnp.sys	Kernel Driver Yes	Boot	Running OK Critical No Yes
		kbdclass	Keyboard Class Driver c:\windows\system32\drivers\kbdclass.sys	Kernel Driver Yes	System	Running OK Normal No Yes
		kbdhid	Keyboard HID Driver c:\windows\system32\drivers\kbdhid.sys	Kernel Driver Yes	System	Running OK Normal No Yes
		ksecdd	KSecDD c:\windows\system32\drivers\ksecdd.sys	Kernel Driver Yes	Boot	Running OK Normal No Yes
		ksthunk	Kernel Streaming WOW64 Thunk Service c:\windows\system32\drivers\ksthunk.sys	Kernel Driver Yes	Manual	Running OK Normal No Yes
		l2nd Adapter	HP NC370 Multifunction Gigabit Server c:\windows\system32\drivers\bxnd52a.sys	Kernel Driver Yes	Manual	Running OK Normal No Yes
		lp6nds35	lp6nds35 Not Available Kernel Driver No Disabled Stopped OK Normal No No			
		lsi_sas	lsi_sas c:\windows\system32\drivers\lsi_sas.sys	Kernel Driver Yes	Boot	
		mnmdd	mnmdd c:\windows\system32\drivers\mnmdd.sys	Kernel Driver Yes	System	Running OK Ignore No Yes
		modem	Modem c:\windows\system32\drivers\modem.sys	Kernel Driver No	Manual	Stopped OK Ignore No No
		mouclass	Mouse Class Driver c:\windows\system32\drivers\mouclass.sys	Kernel Driver Yes	System	Running OK Normal No Yes
		mouhid	Mouse HID Driver c:\windows\system32\drivers\mouhid.sys	Kernel Driver Yes	Manual	Running OK Ignore No Yes
		mountmgr	Mount Point Manager c:\windows\system32\drivers\mountmgr.sys	Kernel Driver Yes	Boot	Running OK Normal No Yes
		mraid35x	mraid35x Not Available Kernel Driver No Disabled Stopped OK Normal No No			
		mrxdav	WebDav Client Redirector c:\windows\system32\drivers\mrxdav.sys	File System Driver No	Manual	Stopped OK Normal No No
		mrxsmb	MRXSMB c:\windows\system32\drivers\mrxsmb.sys	File System Driver Yes	System	Running OK Normal No Yes
		msfs	Msfs c:\windows\system32\drivers\msfs.sys	File System Driver Yes	System	Running OK Normal No Yes
		mssmbios	Microsoft System Management BIOS Driver c:\windows\system32\drivers\mssmbios.sys	Kernel Driver Yes	Manual	Running OK Normal No Yes
		multevent iver.sys	MultEvent Driver ?\?\c:\windows\system32\drivers\multeventdr	Kernel Driver No	Manual	Stopped OK Normal No No
		mup	Mup c:\windows\system32\drivers\mup.sys	File System Driver Yes	Boot	Running OK Normal No Yes
		ndis	NDIS System Driver c:\windows\system32\drivers\ndis.sys			

ndistapi	Kernel Driver Running OK	Yes Normal	Boot No	Yes	pci	PCI Bus Driver c:\windows\system32\drivers\pci.sys	Kernel Driver Running OK	Yes Critical	Boot No	Yes	raspti	Direct Parallel c:\windows\system32\drivers\raspti.sys
ndisui0	Remote Access NDIS TAPI Driver c:\windows\system32\drivers\ndistapi.sys	Kernel Driver Running OK	Yes Normal	Manual No	pcide	PCIide c:\windows\system32\drivers\pcide.sys	Kernel Driver Running OK	Yes Normal	Boot No	Yes	rdbss	Rdbss c:\windows\system32\drivers\rdbss.sys
ndiswan	NDIS Usermode I/O Protocol c:\windows\system32\drivers\ndisui0.sys	Kernel Driver Stopped OK	No Normal	Manual No	pcmcia	Pcmcia c:\windows\system32\drivers\pcmcia.sys	Kernel Driver Stopped OK	No	Disabled Normal	No	rdpcdd	RDP CDD c:\windows\system32\drivers\rdpcdd.sys
ndiproxy	NDIS Proxy c:\windows\system32\drivers\ndproxy.sys	Kernel Driver Running OK	Yes Normal	Manual No	pdcomp	PDCOMP Not Available No Manual	Kernel Driver Stopped OK	Ignore No	OK	Yes	rdpdr	Terminal Server Device Redirector Driver c:\windows\system32\drivers\rdpdr.sys
netbios	NetBIOS Interface c:\windows\system32\drivers\netbios.sys	File System Driver Running OK	Yes Normal	System No	pdframe	PDFRAME Not Available No Manual	Kernel Driver Stopped OK	Ignore No	OK	Yes	rdpwd	RDPWD c:\windows\system32\drivers\rdpwd.sys
netbt	NetBios over Tcpip c:\windows\system32\drivers\netbt.sys	Kernel Driver Running OK	Yes Normal	System No	pdreli	PDR ELI Not Available No Manual	Kernel Driver Stopped OK	Ignore No	OK	Yes	redbook	Digital CD Audio Playback Filter Driver c:\windows\system32\drivers\redbook.sys
nfrd960	nfrd960 Not Available No Normal	Kernel Driver Disabled No	OK	Processor Driver c:\windows\system32\drivers\processor.sys	pptpminiport	WAN Miniport (PPTP) c:\windows\system32\drivers\raspptp.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes	secdrv	Security Driver c:\windows\system32\drivers\secdrv.sys
npfs	Npfs c:\windows\system32\drivers\npfs.sys	File System Driver Running OK	Yes Normal	System No	ptilink	Direct Parallel Link Driver c:\windows\system32\drivers\ptilink.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes	serenum	Serenum Filter Driver c:\windows\system32\drivers\serenum.sys
ntfs	Ntfs c:\windows\system32\drivers\ntfs.sys	File System Driver Running OK	Yes Normal	Disabled No	ql2300	QLogic Fibre Channel STOR Miniport Driver (wx64 IP) c:\windows\system32\drivers\ql2300.sys	Kernel Driver Running OK	Yes Normal	Boot No	Yes	serial	Serial port driver c:\windows\system32\drivers\serial.sys
null	Null c:\windows\system32\drivers\null.sys	Kernel Driver Running OK	Yes Normal	System No	rasacd	Remote Access Auto Connection Driver c:\windows\system32\drivers\rasacd.sys	Kernel Driver Running OK	Yes Normal	System No	Yes	sfloppy	High-Capacity Floppy Disk Drive c:\windows\system32\drivers\sfloppy.sys
parport	Parport c:\windows\system32\drivers\parport.sys	Kernel Driver Stopped OK	No Ignore	Manual No	rasl2tp	WAN Miniport (L2TP) c:\windows\system32\drivers\rasl2tp.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes	simbad	Simbad Not Available No Disabled Normal
partmgr	Partition Manager c:\windows\system32\drivers\partmgr.sys	Kernel Driver Running OK	Yes Normal	Boot No	rasppoe	Remote Access PPPOE Driver c:\windows\system32\drivers\rasppoe.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes	smarttrigger	SmartTrigger Driver \?\?\c:\windows\system32\drivers\smarttrigge
											r.sys	Kernel Driver Stopped OK
											srv	Srv c:\windows\system32\drivers\srv.sys
												File System Driver Yes
												Manual

	Running	OK	Normal	No	Yes
swenum	Software Bus Driver c:\windows\system32\drivers\swenum.sys				
	Kernel Driver Yes Manual				
	Running OK Normal No Yes				
symc8xx	symc8xx Not Available Kernel Driver No Disabled Stopped OK				
	Normal No No				
sympipi	sympipi Not Available Kernel Driver No Disabled Stopped OK				
	Normal No No				
sym_hi	sym_hi Not Available Kernel Driver No Disabled Stopped OK				
	Normal No No				
sym_u3	sym_u3 Not Available Kernel Driver No Disabled Stopped OK				
	Normal No No				
tcpip	TCP/IP Protocol Driver c:\windows\system32\drivers\tcpip.sys				
	Kernel Driver Yes System				
	Running OK Normal No Yes				
tdpipe	TDPIPE c:\windows\system32\drivers\tdpipe.sys				
	Kernel Driver No Manual				
	Stopped OK Ignore No No				
tdtcp	TDTCP c:\windows\system32\drivers\tdtcp.sys				
	Kernel Driver Yes Manual				
	Running OK Ignore No Yes				
termdd	Terminal Device Driver c:\windows\system32\drivers\termdd.sys				
	Kernel Driver Yes System				
	Running OK Normal No Yes				
toside	TosIde Not Available Kernel Driver No Disabled Stopped OK				
	Normal No No				
udfs	Udfs c:\windows\system32\drivers\udfs.sys				
	File System Driver No Disabled				
	Stopped OK Normal No No				
ultra	ultra Not Available Kernel Driver No Disabled Stopped OK				
	Normal No No				
update	Microcode Update Driver c:\windows\system32\drivers\update.sys				
	Kernel Driver Yes Manual				
	Running OK Normal No Yes				
usbccgp	Microsoft USB Generic Parent Driver c:\windows\system32\drivers\usbccgp.sys				
	Kernel Driver Yes Manual				
	Running OK Normal No Yes				
usbehci	Microsoft USB 2.0 Enhanced Host Controller Miniport Driver				

	c:\windows\system32\drivers\usbehci.sys				
	Kernel Driver Yes Manual				
	Running OK Normal No Yes				
usbhub	Microsoft USB Standard Hub Driver c:\windows\system32\drivers\usbhub.sys				
	Kernel Driver Yes Manual				
	Running OK Normal No Yes				
usbohci	Microsoft USB Open Host Controller Miniport Driver c:\windows\system32\drivers\usbohci.sys				
	Kernel Driver Yes Manual				
	Running OK Normal No Yes				
usbstor	USB Mass Storage Driver c:\windows\system32\drivers\usbstor.sys				
	Kernel Driver No Manual				
	Stopped OK Normal No No				
usbuhci	Microsoft USB Universal Host Controller Miniport Driver c:\windows\system32\drivers\usbuhci.sys				
	Kernel Driver Yes Manual				
	Running OK Normal No Yes				
vga	vga c:\windows\system32\drivers\vgapnp.sys				
	Kernel Driver No Manual				
	Stopped OK Ignore No No				
vgasave	VGA Display Controller. c:\windows\system32\drivers\vga.sys				
	Kernel Driver Yes System				
	Running OK Ignore No Yes				
viaide	ViaIde Not Available Kernel Driver No Disabled Stopped OK				
	Normal No No				
volsnap	Storage volumes c:\windows\system32\drivers\volsnap.sys				
	Kernel Driver Yes Boot				
	Running OK Normal No Yes				
wanarp	Remote Access IP ARP Driver c:\windows\system32\drivers\wanarp.sys				
	Kernel Driver Yes Manual				
	Running OK Normal No Yes				
wdf01000	Wdf01000 c:\windows\system32\drivers\wdf01000.sys				
	Kernel Driver Yes Boot				
	Running OK Normal No Yes				
wdica	WDICA Not Available Kernel Driver No Manual Stopped OK				
	Ignore No No				
wlbs	Network Load Balancing c:\windows\system32\drivers\wlbs.sys				
	Kernel Driver No Manual				
	Stopped OK Normal No No				

[Signed Drivers]

Device Name	Signed	Device Class
Driver Version	Driver Date	
Manufacturer	INF Name	Driver Name
Device ID		
Microsoft System Management BIOS Driver	Yes	
SYSTEM 5.2.3790.1830	10/1/2002	
(Standard system devices)	machine.inf	
Not Available	ROOT\SYSTEM\0002	
Microcode Update Device	Yes	SYSTEM
5.2.3790.1830	10/1/2002	(Standard
system devices)	machine.inf	Not Available
ROOT\SYSTEM\0001		
Plug and Play Software Device Enumerator	Yes	
SYSTEM 5.2.3790.1830	10/1/2002	
(Standard system devices)	machine.inf	
Not Available	ROOT\SYSTEM\0000	
Terminal Server Mouse Driver	Yes	SYSTEM
5.2.3790.1830	10/1/2002	(Standard
system devices)	machine.inf	Not Available
ROOT\RDP_MOU\0000		
Terminal Server Keyboard Driver	Yes	
SYSTEM 5.2.3790.1830	10/1/2002	
(Standard system devices)	machine.inf	
Not Available	ROOT\RDP_KBD\0000	
Terminal Server Device Redirector	Yes	
SYSTEM 5.2.3790.1830	10/1/2002	
(Standard system devices)	machine.inf	
Not Available	ROOT\RDPDR\0000	
Direct Parallel	NET 5.2.3790.1830	
10/1/2002 Microsoft netrasa.inf	Not	
Available ROOT\MS_PTMINIPORT\0000		
WAN Miniport (PPTP)	Yes NET 5.2.3790.1830	
10/1/2002 Microsoft netrasa.inf	Not	
Available ROOT\MS_PPTPMINIPORT\0000		
WAN Miniport (PPPOE)	Yes NET 5.2.3790.1830	
5.2.3790.1830	10/1/2002 Microsoft	
netrasa.inf	Not Available	
ROOT\MS_PPPOEMINIPORT\0000		
WAN Miniport (IP)	Yes NET 5.2.3790.1830	
10/1/2002 Microsoft netrasa.inf	Not	
Available ROOT\MS_NDISWANIP\0000		
WAN Miniport (L2TP)	Yes NET 5.2.3790.1830	
10/1/2002 Microsoft netrasa.inf	Not	
Available ROOT\MS_L2TPMINIPORT\0000		
Video Codecs	Yes MEDIA 5.2.3790.1830	
10/1/2002 (Standard system devices)		
wave.inf	Not Available	
ROOT\MEDIA\MS_MMVID		
Legacy Video Capture Devices	Yes MEDIA	
5.2.3790.1830	10/1/2002	(Standard
system devices)	wave.inf	Not Available
ROOT\MEDIA\MS_MMVCD		
Media Control Devices	Yes MEDIA	
5.2.3790.1830	10/1/2002	(Standard
system devices)	wave.inf	Not Available
ROOT\MEDIA\MS_MMCI		
Legacy Audio Drivers	Yes MEDIA	
5.2.3790.1830	10/1/2002	(Standard
system devices)	wave.inf	Not Available
ROOT\MEDIA\MS_MMDRV		

Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 07OFFSET7E00LENGTHA58B4200	Storage\VOLUME\1&30A96598&0&SIGNATUREB026B3 0BOFFSET7E00LENGTH3344E12800
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 13OFFSET7E00LENGTHH445B835E00	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 00OFFSET7E00LENGTH3826909200	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 34OFFSET7E00LENGTHH445B835E00
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 1COFFSET7E00LENGTH1485E499000	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 01OFFSET7E00LENGTH3344E12800	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 35OFFSET7E00LENGTHA58B4200
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 1DOFFSET7E00LENGTHTHEA58B4200	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 02OFFSET7E00LENGTHH445B835E00	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 36OFFSET7E00LENGTH3826909200
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 1EOFSET7E00LENGTH3826909200	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 03OFFSET7E00LENGTH1485E499000	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 37OFFSET7E00LENGTH3344E12800
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 1FOFFSET7E00LENGTH3344E12800	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 0COFFSET7E00LENGTHA58B4200	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 38OFFSET7E00LENGTHH445B835E00
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 18OFFSET7E00LENGTHH445B835E00	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Volume Manager Yes SYSTEM 5.2.3790.1830 10/1/2002 (Standard system devices) machine.inf Not Available
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 0DOFFSET7E00LENGTH3826909200	Logical Disk Manager Yes SYSTEM 5.2.3790.1830 10/1/2002 (Standard system devices) machine.inf Not Available
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 19OFFSET7E00LENGTH1485E499000	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	ROOT\FTDISK\0000
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 0EOFSET7E00LENGTH3344E12800	ACPI Fixed Feature Button Yes SYSTEM 5.2.3790.1830 10/1/2002 (Standard system devices) machine.inf Not Available
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 1AOFFSET7E00LENGTHA58B4200	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	ACPI\FIXEDBUTTON\2&DABA3FF&0
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 0FOFFSET7E00LENGTHH445B835E00	Advanced programmable interrupt controller Yes
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 1BOFFSET7E00LENGTH3826909200	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	SYSTEM 5.2.3790.1830 10/1/2002 (Standard system devices) machine.inf
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 08OFFSET7E00LENGTH1485E499000	Not Available ACPI\PNP0003\4
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 04OFFSET7E00LENGTH3344E12800	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Advanced programmable interrupt controller Yes
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 09OFFSET7E00LENGTHA58B4200	SYSTEM 5.2.3790.1830 10/1/2002 (Standard system devices) machine.inf
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 05OFFSET7E00LENGTHH445B835E00	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Not Available ACPI\PNP0003\3
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 0AOFFSET7E00LENGTH3826909200	Advanced programmable interrupt controller Yes
Available STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 06OFFSET7E00LENGTH1485E499000	Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	SYSTEM 5.2.3790.1830 10/1/2002 (Standard system devices) machine.inf
Generic volume Yes VOLUME 5.2.3790.1830 10/1/2002 Microsoft volume.inf Not	Available	Not Available ACPI\PNP0003\2
STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 2\3&33B859B7&0&89	STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 6.9.58.64 1/18/2008 Hewlett-Packard	System Interrupt Controller Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 6.9.58.64 1/18/2008 Hewlett-Packard	oem30.inf Not Available	UNKNOWN Not Available Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREB026B3 8D3C3A&0&0100004000000000	HPQCISSV.DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&6	Not Available Not Available Not Available

```

Smart Array Logical Volume      No          DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HPQCSV\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&6
8D3C3A&0&0000004000000000
Smart Array P600 Controller (Non-Miniport)      NO
SCSIADAPTER      6.21.64.64
1/18/2008 Hewlett-Packard      oem29.inf Not Available
Available      PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
0\4&24CF26E8&0&1088
Disk drive      Yes          DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_LSILOGIC&PROD_LOGICAL_VOLUME&
REV_3000\5&1AC6146F&0&000100
LSI Adapter, SAS 3000 series, 8-port with 1068 -
StorPort      Yes      SCSIADAPTER      1.24.4.0
2/9/2007 LSI Logic oem0.inf Not Available
PCI\VEN_1000&DEV_0054&SUBSYS_3228103C&REV_0
0\4&24CF26E8&0&0888
PCI standard PCI-to-PCI bridge      Yes
SYSTEM      5.2.3790.1830      10/1/2002
(Standard system devices)      machine.inf
Not Available
PCI\VEN_1022&DEV_7458&SUBSYS_00000000&REV_1
2\3&33B859B7&0&88
System Interrupt Controller      Not Available
UNKNOWN      Not Available      Not Available
Not Available      Not Available      Not Available
Available      PCI\VEN_1022&DEV_7459&SUBSYS_74591022&REV_1
2\3&33B859B7&0&81
HP NC371i Multifunction Gigabit Server Adapter      Yes
NET      4.5.4.0      8/12/2008 Hewlett-
Packard Company      oem32.inf Not Available
B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
EV_02\5&24945E16&0&20054102
HP NC371i Virtual Bus Device      Yes      SYSTEM
4.4.24.0      8/12/2008 Hewlett-Packard Company
oem33.inf Not Available
PCI\VEN_14E4&DEV_164A&SUBSYS_1709103C&REV_0
2\4&9C889E9&0&1080
HP NC371i Multifunction Gigabit Server Adapter      Yes
NET      4.5.4.0      8/12/2008 Hewlett-
Packard Company      oem32.inf Not Available
B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
EV_02\5&B64F98D&0&20054101
HP NC371i Virtual Bus Device      Yes      SYSTEM
4.4.24.0      8/12/2008 Hewlett-Packard Company
oem33.inf Not Available
PCI\VEN_14E4&DEV_164A&SUBSYS_1709103C&REV_0
2\4&9C889E9&0&0880
PCI standard PCI-to-PCI bridge      Yes
SYSTEM      5.2.3790.1830      10/1/2002
(Standard system devices)      machine.inf
Not Available
PCI\VEN_1022&DEV_7458&SUBSYS_00000000&REV_1
2\3&33B859B7&0&80
Smart Array Logical Volume      No          DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available

```

HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
0FC6F5E&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
0FC6F5E&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
0FC6F5E&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
0FC6F5E&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
0FC6F5E&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem29.inf Not Available
Available PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&3EC0CCA0&00070
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
3\3&33B859B7&0&70
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&6
352F4D&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&6
352F4D&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&6
352F4D&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&6
352F4D&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
6.9.58.64 1/18/2008 Hewlett-Packard
oem30.inf Not Available
HQPCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&6
352F4D&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 6.21.64.64
1/18/2008 Hewlett-Packard oem29.inf Not Available

Available PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&1B1CF5E7&0&0068
PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
3\3&33B859B7&0&68
Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
CC70BE&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
CC70BE&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
CC70BE&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
CC70BE&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
CC70BE&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
 SCSIADAPTER 6.21.64.64
 1/18/2008 Hewlett-Packard oem29.inf Not
Available PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&137ABAEA&0&0060
PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
3\3&33B859B7&0&60
Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
167F8B&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
167F8B&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
167F8B&0&0200004000000000

Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
 167F8B&0&0100004000000000
 Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
 167F8B&0&000004000000000
 Smart Array P800 Controller (Non-Miniport) No
 SCSIADAPTER 6.21.64.64
 1/18/2008 Hewlett-Packard oem29.inf Not Available
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 3\4&300C8240&0&0058
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
 3\3&3B859B7&0&58
 NVIDIA nForce4 Low Pin Count Controller Yes
 SYSTEM 5.2.3790.3959 10/1/2002
 NVIDIA machine.inf Not Available
 PCI\VEN_10DE&DEV_00D3&SUBSYS_CB8410DE&REV_B
 1\3&3B859B7&0&08
 NVIDIA nForce4 HyperTransport Bridge Yes
 SYSTEM 5.2.3790.3959 10/1/2002
 NVIDIA machine.inf Not Available
 PCI\VEN_10DE&DEV_005E&SUBSYS_00000000&REV_A
 4\3&3B859B7&0&00
 PCI bus Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0A03\8
 Advanced programmable interrupt controller Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 ACPI\PNP0003\1
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1204&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&DC
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1203&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&DB
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1202&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&DA
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1201&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&D9
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard

system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1200&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&D8
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1204&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&D4
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1203&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&D3
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1202&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&D2
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1201&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&D1
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1200&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&D0
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1204&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&CC
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1203&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&CB
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1202&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&CA
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1201&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&C9
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1200&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&C8
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1204&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&C4
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available

PCI\VEN_1022&DEV_1203&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&C3
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1202&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&C2
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1201&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&C1
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1022&DEV_1200&SUBSYS_00000000&REV_0
 0\3&20FEA912&0&C0
 Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
 B705FB&0&0400004000000000
 Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
 B705FB&0&0300004000000000
 Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
 B705FB&0&0200004000000000
 Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
 B705FB&0&0100004000000000
 Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
 B705FB&0&0000004000000000
 Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&8
 B705FB&0&0100004000000000
 Smart Array P800 Controller (Non-Miniport) No
 SCSIADAPTER 6.21.64.64
 1/18/2008 Hewlett-Packard oem29.inf Not Available
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 3\4&13700CED&0&0070
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
 3\3&20FEA912&0&70
 Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
 9F386C&0&0400004000000000
 Smart Array Logical Volume No DISKDRIVE
 6.9.58.64 1/18/2008 Hewlett-Packard
 oem30.inf Not Available

HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	PCI Device	Not Available	UNKNOWN	Not Available	ATI ES1000	Yes	DISPLAY	8.24.3.0
9F386C&0&03000400000000				4/5/2006	ATI Technologies Inc.			
Smart Array Logical Volume	No	DISKDRIVE	oem30.inf	Not Available	oem15.inf	Not Available		
6.9.58.64	1/18/2008	Hewlett-Packard	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0	PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0			
0\4&21887AE&0&2648					2\4&21887AE&0&1848			
Generic USB Hub	Yes	USB	10/1/2002	(Generic USB Hub)	PCI standard PCI-to-PCI bridge	Yes		
6.9.58.64	1/18/2008	Hewlett-Packard	oem30.inf	Not Available	SYSTEM	5.2.3790.1830	10/1/2002	
oem30.inf	Not Available	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	usb.inf	(Standard system devices)	Not Available	machine.inf	
9F386C&0&02000400000000				Not Available	PCI\VEN_10DE&DEV_005C&SUBSYS_00000000&REV_A			
Smart Array Logical Volume	No	DISKDRIVE	oem30.inf	Not Available	2\3&20FEA912&0&48			
6.9.58.64	1/18/2008	Hewlett-Packard	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	USB Human Interface Device	Secondary IDE Channel	Yes	HDC	
oem30.inf	Not Available	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	5.2.3790.1830	5.2.3790.1830	10/1/2002	(Standard IDE	
9F386C&0&00000400000000				system devices)	ATA/ATAPI controllers)	Not Available	ATA/ATAPI controllers)	
Smart Array P800 Controller (Non-Miniport)	No	SCSIADAPTER	1/18/2008	Hewlett-Packard	PCIIDE\IDECHANNEL\4&23A0739C&0&1			
6.21.64.64	oem29.inf	oem29.inf	oem30.inf	Not Available	CD-ROM Drive	Yes	CDROM	5.2.3790.1830
Available	PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A			01	10/1/2002	(Standard CD-ROM drives)	cdrom.inf	Not Available
3\4&B98F5C4&0&0068				HID Keyboard Device	IDE\CDROMTEAC_DW-224E-			
Smart Array Logical Volume	No	DISKDRIVE	6.9.58.64	1/18/2008	V_____C.CA____\5&2270D2F8&0&0.0.			
oem30.inf	Not Available	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	USB\VID_03F0&PID_1027&MI_01\8&AACF5F7&0&000	00	0			
7A88D94&0&03000400000000			USB Human Interface Device	USB\VID_03F0&PID_1027&MI_01\7&3B124F76&0&00	Primary IDE Channel	Yes	HDC	5.2.3790.1830
Smart Array Logical Volume	No	DISKDRIVE	oem30.inf	Not Available	10/1/2002	(Standard IDE	10/1/2002	
6.9.58.64	1/18/2008	Hewlett-Packard	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	USB\VID_03F0&PID_1027&MI_00\8&2270823C&0&00	controllers)	ATA/ATAPI controllers)	mshdc.inf	Not Available
7A88D94&0&02000400000000			USB Composite Device	USB\VID_03F0&PID_1027&MI_00\7&3B124F76&0&00	PCIIDE\IDECHANNEL\4&23A0739C&0&0			
Smart Array Logical Volume	No	DISKDRIVE	oem30.inf	Not Available	00	Standard Dual Channel PCI IDE Controller	Yes	
6.9.58.64	1/18/2008	Hewlett-Packard	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	USB\VID_03F0&PID_1027&MI_00\5&246EA08&0	HDC	5.2.3790.1830	10/1/2002	
7A88D94&0&01000400000000			USB Host Controller	USB\VID_03F0&PID_1027&MI_00\5&246EA08&01	(Standard IDE ATA/ATAPI controllers)	mshdc.inf	Not Available	
Smart Array Logical Volume	No	DISKDRIVE	oem30.inf	Not Available	USB Composite Device	PCI\VEN_10DE&DEV_0053&SUBSYS_31F8103C&REV_A		
6.9.58.64	1/18/2008	Hewlett-Packard	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	USB\VID_03F0&PID_1027&MI_00\5&246EA08&02	3\3&20FEA912&0&68			
7A88D94&0&00000400000000			USB Root Hub	USB\VID_04B4&PID_6560\5&2941608A&0&6	Generic USB Hub	Yes	USB	5.2.3790.1830
Smart Array Logical Volume	No	DISKDRIVE	oem30.inf	Not Available	10/1/2002	(Generic USB Hub)	usb.inf	Not Available
6.9.58.64	1/18/2008	Hewlett-Packard	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	USB\ROOT_HUB\5&246EA08&0	Available USB Root Hub	Yes	USB	5.2.3790.1830
7A88D94&0&00000400000000			USB Host Controller	USB\ROOT_HUB\5&246EA08&01	10/1/2002	(Standard USB Host Controller)	usbport.inf	Not Available
Smart Array Logical Volume	No	DISKDRIVE	oem30.inf	Not Available	Standard Universal PCI to USB Host Controller	Yes	USB	5.2.3790.1830
6.9.58.64	1/18/2008	Hewlett-Packard	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	USB\VID_03F0&PID_1027&MI_00\5&246EA08&02	(Standard USB Host Controller)	usbport.inf	Not Available	
7A88D94&0&01000400000000			USB Host Controller	USB\VID_03F0&PID_1027&MI_00\5&246EA08&03	Standard Enhanced PCI to USB Host Controller	Yes	USB	5.2.3790.1830
Smart Array Logical Volume	No	DISKDRIVE	oem30.inf	Not Available	USB\VID_03F0&PID_1027&MI_00\5&246EA08&04	(Standard USB Host Controller)	usbport.inf	Not Available
6.9.58.64	1/18/2008	Hewlett-Packard	HPQCIS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1	USB\VID_03F0&PID_1027&MI_00\5&246EA08&05	Standard OpenHCD USB Host Controller	Yes	USB	5.2.3790.1830
7A88D94&0&00000400000000			USB Host Controller	USB\VID_03F0&PID_1027&MI_00\5&246EA08&06	10/1/2002	(Standard USB Host Controller)	usbport.inf	Not Available
Smart Array E500 Controller (Non-Miniport)	No	SCSIADAPTER	1/18/2008	Hewlett-Packard	PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0	PCI\VEN_10DE&DEV_005B&SUBSYS_31F8103C&REV_A		
6.21.64.64	oem29.inf	oem29.inf	Available	3\4&21887AE&0&2248	4\3&20FEA912&0&6011			
Available	PCI\VEN_103C&DEV_3230&SUBSYS_3237103C&REV_0			Base System Device	USB Root Hub	Yes	USB	5.2.3790.1830
3\4&22FEBBD0&0&0060				Not Available	10/1/2002	(Standard USB Host Controller)	usbport.inf	Not Available
PCI standard PCI-to-PCI bridge	Yes			Available Not Available	usbport.inf	Not Available	USB\ROOT_HUB\4&1EFC638D&0	
SYSTEM	5.2.3790.1830	10/1/2002		Available Not Available	USB\ROOT_HUB20\4&26DB321C&0			
(Standard system devices)	machine.inf			Available Not Available	Standard Enhanced PCI to USB Host Controller	Yes	USB	5.2.3790.1830
Not Available				Available Not Available	(Standard USB Host Controller)	usbport.inf	Not Available	
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A				Available Not Available	usbport.inf	Not Available	PCI\VEN_10DE&DEV_005B&SUBSYS_31F8103C&REV_A	
3\3&20FEA912&0&60				Available Not Available	PCI\VEN_10DE&DEV_005B&SUBSYS_31F8103C&REV_A			
Plug and Play Monitor	Yes	MONITOR	5.2.3790.1830	10/1/2002	4\3&20FEA912&0&2048			
monitor types)	monitor.inf	Not Available	10/1/2002	(Standard monitor types)	Extended IO Bus	Yes	SYSTEM	5.2.3790.1830
monitor types)	monitor.inf	Not Available	(Standard monitor types)	10/1/2002	10/1/2002	(Standard system devices)	machine.inf	Not Available
DISPLAY\AV00000\5&292E0C71&0&10000080&01&03			DISPLAY\AV00000\5&292E0C71&0&10000080&01&03	Available Not Available	ACPI\PNP0A06\4&142B453B&0			
Default Monitor	Yes	MONITOR	5.2.3790.1830	10/1/2002	PS/2 Compatible Mouse	Yes	MOUSE	
monitor.inf	Not Available	Not Available	10/1/2002	(Standard monitor types)	5.2.3790.1830	10/1/2002	Microsoft	
DISPLAY\DEFAULT_MONITOR\5&292E0C71&0&100000			DISPLAY\DEFAULT_MONITOR\5&292E0C71&0&100000	01&01&03	msmouse.inf	Not Available		
01&01&03					ACPI\PNP0F13\4&142B453B&0			

```

Standard 101/102-Key or Microsoft Natural PS/2
Keyboard Yes KEYBOARD 5.2.3790.1830
          10/1/2002 (Standard keyboards)
          keyboard.inf Not Available
          ACPI\PNP0303\4&142B453B&0
System speaker Yes SYSTEM 5.2.3790.1830
          10/1/2002 (Standard system devices)
          machine.inf Not Available
          ACPI\PNP0800\4&142B453B&0
Direct memory access controller Yes
          SYSTEM 5.2.3790.1830 10/1/2002
          (Standard system devices) machine.inf
          Not Available
          ACPI\PNP0200\4&142B453B&0
High precision event timer Yes SYSTEM
          5.2.3790.3959 10/1/2002 (Standard
          system devices) machine.inf Not Available
          ACPI\PNP0103\0
System timer Yes SYSTEM 5.2.3790.1830
          10/1/2002 (Standard system devices)
          machine.inf Not Available
          ACPI\PNP0100\4&142B453B&0
Not Available Not Available Not Available
          Not Available Not Available Not Available
Available Not Available Not Available
          ACPI\IPI0001\0
Motherboard resources Yes SYSTEM
          5.2.3790.1830 10/1/2002 (Standard
          system devices) machine.inf Not Available
          ACPI\PNP0C02\0
PCI standard ISA bridge Yes SYSTEM
          5.2.3790.1830 10/1/2002 (Standard
          system devices) machine.inf Not Available
          PCI\VEN_10DE&DEV_0051&SUBSYS_00000000&REV_B
1\3&20FEA912&0&08
NVIDIA nForce4 HyperTransport Bridge Yes
          SYSTEM 5.2.3790.3959 10/1/2002
          NVIDIA machine.inf Not Available
          PCI\VEN_10DE&DEV_005E&SUBSYS_00000000&REV_A
4\3&20FEA912&0&00
PCI bus Yes SYSTEM 5.2.3790.1830
          10/1/2002 (Standard system devices)
          machine.inf Not Available
          ACPI\PNP0A03\7
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\15
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\14
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\13
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available

```

```

          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\12
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\11
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\10
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\9
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\8
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\7
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\6
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\5
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\4
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\3
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\2
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\1
Processor Yes PROCESSOR 5.2.3790.1830
          10/1/2002 (Standard processor types)
          cpu.inf Not Available
          ACPI\AUTHENTICAMD_-
          _AMD64_FAMILY_16_MODEL_4\0

```

```

Microsoft ACPI-Compliant System Yes
          SYSTEM 5.2.3790.1830 10/1/2002
          Microsoft acpi.inf Not Available
          ACPI_HAL\PNPOC08\0
ACPI Multiprocessor x64-based PC Yes
          COMPUTER 5.2.3790.1830 10/1/2002
          (Standard computers) hal.inf Not
Available ROOT\ACPI_HAL\0000
Not Available Not Available Not Available
          Not Available Not Available Not Available
Available Not Available Not Available
          HTREE\ROOT\0

[Environment Variables]

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path C:\Program
Files\HP\NCU;%SystemRoot%\system32;%SystemRoot%&%;Syst
emRoot%\System32\Wbem;C:\Program Files
(x86)\Microsoft SQL Server\80\Tools\Binn\;C:\Program
Files\Microsoft SQL Server\90\Tools\binn\;C:\Program
Files (x86)\Microsoft SQL
Server\90\Tools\binn\;C:\Program Files
(x86)\Microsoft SQL Server\90\DTs\Binn\;C:\Program
Files (x86)\Microsoft SQL
Server\90\Tools\Binn\VSShell\Common7\IDE\;C:\Program
Files (x86)\Microsoft Visual Studio
8\Common7\IDE\PrivateAssemblies\;C:\Program
Files\Microsoft SQL Server\90\DTs\Binn\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
FP_NO_HOST_CHECK NO <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE AMD64 <SYSTEM>
PROCESSOR_LEVEL 16 <SYSTEM>
PROCESSOR_IDENTIFIER AMD64 Family 16 Model 4
Stepping 2, AuthenticAMD <SYSTEM>
PROCESSOR_REVISION 0402 <SYSTEM>
NUMBER_OF_PROCESSORS 16 <SYSTEM>
ClusterLog C:\WINDOWS\Cluster\cluster.log
<SYSTEM>
PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
; .WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\
<SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
B2\Administrator

```

TMP	%USERPROFILE%\Local Settings\Temp				
	B2\Administrator				
[Print Jobs]					
Document	Size	Owner	Notify	Status	
Time Submitted		Start Time			
Until Time		Elapsed Time			
Pages Printed		Job ID		Priority	
Parameters		Driver		Print	
Processor Host	Print Queue	Data Type	Name		
[Network Connections]					
Local Name	Remote Name	Type			
Status	User Name				
[Running Tasks]					
Name	Path	Process ID	Priority	Min	
Working Set	Max Working Set	Start Time			
Version	Size	File Date			
system idle process	Not Available	0	0		
Not Available	Not Available	Not Available			
Available	Not Available	Not Available	Not Available		
system	Not Available	4	8	0	
1380	Not Available	Not Available	Not Available		
Not Available	Not Available	Not Available			
smss.exe	Not Available	356	11	200	
1380	10/21/2008 2:24 PM	Not Available			
Not Available	Not Available	Not Available			
csrss.exe	Not Available	404	13	Not Available	
Available	Not Available	10/21/2008 2:24 PM	Not Available		
Available	Not Available	Not Available	Not Available		
winlogon.exe	c:\windows\system32\winlogon.exe				
432	13	200	1380		
10/21/2008 2:24 PM	5.2.3790.3959				
(srv03_sp2_rtm.070216-1710)	922.00 KB (944,128 bytes)				
services.exe	c:\windows\system32\services.exe				
480	9	200	1380		
10/21/2008 2:24 PM	5.2.3790.3959				
(srv03_sp2_rtm.070216-1710)	219.00 KB (224,256 bytes)				
11/30/2005 6:00 AM					
lsass.exe	c:\windows\system32\lsass.exe	492	9		
200	1380	10/21/2008 2:24 PM			
5.2.3790.1830	(srv03_sp1_rtm.050324-1447)				
14.00 KB (14,336 bytes)	11/30/2005				
6:00 AM					
svchost.exe	c:\windows\system32\svchost.exe				
648	8	200	1380		
10/21/2008 2:24 PM	5.2.3790.3959				
(srv03_sp2_rtm.070216-1710)	25.00 KB (25,600 bytes)				
8/11/2008 8:50 AM					
svchost.exe	Not Available	740	8		
Not Available	Not Available	Not Available	Not Available		
10/21/2008 2:24 PM	Not Available	Not Available	Not Available		
Available	Not Available	Not Available	Not Available		
svchost.exe	c:\windows\system32\svchost.exe				
800	8	200	1380		
10/21/2008 2:24 PM	5.2.3790.3959				

(srv03_sp2_rtm.070216-1710)	25.00 KB (25,600 bytes)				
8/11/2008 8:50 AM					
msdtc.exe	Not Available	872	8	Not Available	
Available	Not Available	10/21/2008 2:24 PM	Not Available		
Available	Not Available	Not Available	Not Available		
svchost.exe	c:\windows\system32\svchost.exe				
988	8	200	1380		
10/21/2008 2:24 PM	5.2.3790.3959				
(srv03_sp2_rtm.070216-1710)	25.00 KB (25,600 bytes)				
8/11/2008 8:50 AM					
svchost.exe	Not Available	1084	8	Not Available	
Not Available	Not Available	10/21/2008 2:24 PM	Not Available	Not Available	
Available	Not Available	Not Available	Not Available		
svchost.exe	c:\windows\system32\svchost.exe				
1324	8	200	1380		
10/21/2008 2:24 PM	5.2.3790.3959				
(srv03_sp2_rtm.070216-1710)	25.00 KB (25,600 bytes)				
8/11/2008 8:50 AM					
wmiprvse.exe	Not Available	1480	8	Not Available	
Not Available	Not Available	10/21/2008 2:25 PM	Not Available	Not Available	
Available	Not Available	Not Available	Not Available		
logon.scr	Not Available	1644	4	Not Available	
Available	Not Available	10/21/2008 2:34 PM	Not Available		
Available	Not Available	Not Available	Not Available		
csrss.exe	Not Available	2036	13	Not Available	
Available	Not Available	10/21/2008 3:55 PM	Not Available		
Available	Not Available	Not Available	Not Available		
winlogon.exe	c:\windows\system32\winlogon.exe				
268	13	200	1380		
10/21/2008 3:55 PM	5.2.3790.3959				
(srv03_sp2_rtm.070216-1710)	922.00 KB (944,128 bytes)				
8/11/2008 8:50 AM					
rdpclip.exe	c:\windows\system32\rdpclip.exe				
656	8	200	1380		
10/21/2008 3:55 PM	5.2.3790.3959				
(srv03_sp2_rtm.070216-1710)	99.00 KB (101,376 bytes)				
8/11/2008 8:50 AM					
explorer.exe	c:\windows\explorer.exe	560			
8	200	1380	10/21/2008 3:55 PM		
6.00.3790.3959	(srv03_sp2_rtm.070216-1710)				
1.30 MB (1,364,480 bytes)	8/11/2008				
8:51 AM					
cpqteam.exe	c:\program files\hp\ncu\cpqteam.exe	1312	8	200	
1380	10/21/2008 3:55 PM	8.70.0.15			
81.50 KB (83,456 bytes)	6/28/2007				
1:10 PM					
helpctr.exe	c:\windows\pchealth\helpctr\binaries\helpctr.r.exe				
260	8	200	1380		
10/21/2008 3:57 PM	5.2.3790.3959				
(srv03_sp2_rtm.070216-1710)	1.30 MB (1,363,456 bytes)				
9/10/2007 5:00 PM					
wmiprvse.exe	Not Available	1060	8	Not Available	
Not Available	Not Available	10/21/2008 3:57 PM	Not Available	Not Available	
Available	Not Available	Not Available	Not Available		
helpsvc.exe	c:\windows\pchealth\helpctr\binaries\helpsv				
c.exe	1064	8	200	1380	

10/21/2008 3:57 PM	5.2.3790.3959				
(srv03_sp2_rtm.070216-1710)	1.52 MB (1,591,296 bytes)				
9/10/2007 5:00 PM					
[Loaded Modules]					
Name	Version	Size	Date	File Manufacturer	Path
winlogon	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	922.00 KB (944,128 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\winlogon.exe			
ntdll	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	1.20 MB (1,254,400 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\ntdll.dll			
kernel32	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	1.43 MB (1,503,232 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\kernel32.dll			
advapi32	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	1.00 MB (1,051,648 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\advapi32.dll			
rpcrt4	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	1.58 MB (1,653,248 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\rpcrt4.dll			
secur32	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	120.00 KB (122,880 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\secur32.dll			
crypt32	5.131.3790.3959	(srv03_sp2_rtm.070216-1710)	1.36 MB (1,429,504 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\crypt32.dll			
msvcrt	7.0.3790.3959	(srv03_sp2_rtm.070216-1710)	508.00 KB (520,192 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\msvcrt.dll			
user32	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	1.04 MB (1,086,976 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\user32.dll			
gdi32	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	603.50 KB (617,984 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\gdi32.dll			
msasn1	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	152.50 KB (156,160 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\msasn1.dll			
nddeapi	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	25.00 KB (25,600 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\nddeapi.dll			
profmap	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	36.00 KB (36,864 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\profmap.dll			
netapi32	5.2.3790.3959	(srv03_sp2_rtm.070216-1710)	589.00 KB (603,136 bytes)	8/11/2008	

8:50 AM	Microsoft Corporation	
	c:\windows\system32\netapi32.dll	
userenv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.02 MB (1,071,104 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\userenv.dll	
psapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	29.00 KB (29,696 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\psapi.dll	
regapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	108.50 KB (111,104 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\regapi.dll	
setupapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.45 MB (1,524,224 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\setupapi.dll	
version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	28.00 KB (28,672 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\version.dll	
winsta	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	89.00 KB (91,136 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\winsta.dll	
ws2_32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	174.50 KB (178,688 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\ws2_32.dll	
ws2help	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	30.50 KB (31,232 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\ws2help.dll	
msgina	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.14 MB (1,193,472 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\msgina.dll	
shsvcs	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)	
	194.00 KB (198,656 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\shsvcs.dll	
shlwapi	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)	
	607.00 KB (621,568 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\shlwapi.dll	
sfc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	6.00 KB (6,144 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\sfc.dll	
sfc_os	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	183.50 KB (187,904 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\sfc_os.dll	
wintrust	5.131.3790.3959 (srv03_sp2_rtm.070216-1710)	
	297.50 KB (304,640 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\wintrust.dll	
imagehlp	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	57.50 KB (58,880 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\imagehlp.dll	

ole32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	2.50 MB (2,622,976 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\ole32.dll	
comctl32	6.0 (srv03_sp2_rtm.070216-1710)	
	1.51 MB (1,584,640 bytes)	2/18/2007
10:24 AM	Microsoft Corporation	
	c:\windows\system32\comctl32.dll	
common-controls	6.595b64144ccf1df_6.0.3790.3959_x-	
	ww_ab06deb0\comctl32.dll	
uxtheme	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)	
	494.50 KB (506,368 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\uxtheme.dll	
clbcatq	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)	
	862.50 KB (883,200 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\clbcatq.dll	
comres	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)	
	779.50 KB (798,208 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\comres.dll	
wbemprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	38.00 KB (38,912 bytes)	9/10/2007
4:57 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemprox.dll	
wbemcomn	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	518.00 KB (530,432 bytes)	8/11/2008
8:51 AM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcomn.dll	
xpssp2res	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	2.77 MB (2,899,456 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\xpssp2res.dll	
wbemsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	58.00 KB (59,392 bytes)	9/10/2007
4:57 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemsvc.dll	
fastprox	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	866.50 KB (887,296 bytes)	8/11/2008
8:51 AM	Microsoft Corporation	
	c:\windows\system32\fastprox.dll	
msvcp60	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	
	191.50 KB (941,568 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\msvcp60.dll	
ntdsapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	127.50 KB (130,560 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\ntdsapi.dll	
dnsapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	298.50 KB (305,664 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\dnsapi.dll	
services	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	219.00 KB (224,256 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\services.exe	
scesrv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	595.00 KB (609,280 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\scesrv.dll	
authz	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	171.00 KB (175,104 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\authz.dll	
oleaut32	5.2.3790.3959 1.07 MB (1,121,792 bytes)	
	11/30/2005 6:00 AM Microsoft Corporation	
bytes)	c:\windows\system32\oleaut32.dll	

comctl32	5.82 (srv03_sp2_rtm.070216-1710)	
	935.00 KB (957,440 bytes)	2/18/2007
10:24 AM	Microsoft Corporation	
	c:\windows\winsxs\amd64_microsoft.windows.common-controls_6595b64144ccf1df_5.82.3790.3959_x-	
ww_ab06deb0\comctl32.dll	494.50 KB (506,368 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\uxtheme.dll	
clbcatq	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)	
	862.50 KB (883,200 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\clbcatq.dll	
comres	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)	
	779.50 KB (798,208 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\comres.dll	
wbemprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	38.00 KB (38,912 bytes)	9/10/2007
4:57 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemprox.dll	
wbemcomn	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	518.00 KB (530,432 bytes)	8/11/2008
8:51 AM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcomn.dll	
xpssp2res	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	2.77 MB (2,899,456 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\xpssp2res.dll	
wbemsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	58.00 KB (59,392 bytes)	9/10/2007
4:57 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemsvc.dll	
fastprox	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	866.50 KB (887,296 bytes)	8/11/2008
8:51 AM	Microsoft Corporation	
	c:\windows\system32\fastprox.dll	
msvcp60	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	
	191.50 KB (941,568 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\msvcp60.dll	
ntdsapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	127.50 KB (130,560 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\ntdsapi.dll	
dnsapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	298.50 KB (305,664 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\dnsapi.dll	
services	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	219.00 KB (224,256 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\services.exe	
scesrv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	595.00 KB (609,280 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\scesrv.dll	
authz	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	171.00 KB (175,104 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\authz.dll	

umpnpgmgr	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	205.00 KB (209,920 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\umpnpgmgr.dll	
ncobjapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	77.50 KB (79,360 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\ncobjapi.dll	
eventlog	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	127.50 KB (130,560 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\eventlog.dll	
lsass	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	14.00 KB (14,336 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\lsass.exe	
lsasrv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.49 MB (1,566,720 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\lsasrv.dll	
samsrv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.01 MB (1,059,328 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\samsrv.dll	
cryptdll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	47.00 KB (48,128 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\cryptdll.dll	
samlib	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	69.50 KB (71,168 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\samlib.dll	
msprivs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	47.50 KB (48,640 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\msprivs.dll	
kerberos	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	706.00 KB (722,944 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\kerberos.dll	
msv1_0	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	253.00 KB (259,072 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\msv1_0.dll	
iphlpapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	178.50 KB (182,784 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\iphlpapi.dll	
netlogon	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	665.50 KB (681,472 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\netlogon.dll	
w32time	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	398.00 KB (407,552 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\w32time.dll	
schannel	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	248.00 KB (253,952 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\schannel.dll	
wdigest	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	131.00 KB (134,144 bytes)	8/11/2008

8:50 AM	Microsoft Corporation	
	c:\windows\system32\wdigest.dll	
rassfm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	36.00 KB (36,864 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\rassfm.dll	
kdcsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	410.00 KB (419,840 bytes)	8/11/2008
8:51 AM	Microsoft Corporation	
	c:\windows\system32\kdcsvc.dll	
ntdsa	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	2.83 MB (2,967,040 bytes)	8/11/2008
8:51 AM	Microsoft Corporation	
	c:\windows\system32\ntds.dll	
ntdsatq	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	51.00 KB (52,224 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\ntdsatq.dll	
mswsock	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	480.50 KB (492,032 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\mswsock.dll	
esent	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	2.26 MB (2,367,488 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\esent.dll	
scecli	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	308.00 KB (315,392 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\scecli.dll	
ws03res	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	794.00 KB (813,056 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\ws03res.dll	
hnetcfg	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	568.00 KB (581,632 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\hnetcfg.dll	
wshtcpip	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	29.00 KB (29,696 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\wshtcpip.dll	
pstorsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	36.00 KB (36,864 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\pstorsvc.dll	
psbase	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	124.00 KB (126,976 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\psbase.dll	
dssenh	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	231.34 KB (236,888 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\dssenh.dll	
svchost	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	25.00 KB (25,600 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\svchost.exe	
rpcss	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	819.00 KB (838,656 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\rpcss.dll	

ntmarta	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	222.50 KB (227,840 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\ntmarta.dll	
wkssvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	221.00 KB (226,304 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wkssvc.dll	
wiarpcl	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	57.00 KB (58,368 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\wiarpcl.dll	
aelupsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	31.50 KB (32,256 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\aelupsvc.dll	
apphelp	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	241.00 KB (246,784 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\apphelp.dll	
dmserver	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	36.50 KB (37,376 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\dmserver.dll	
es	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)	
	357.00 KB (365,568 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\es.dll	
pchsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	75.50 KB (77,312 bytes)	8/11/2008
8:51 AM	Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\pchsvc.dll	
srvsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	156.50 KB (160,256 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\srvsvc.dll	
cryptsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	114.00 KB (116,736 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\cryptsvc.dll	
certcli	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	371.50 KB (380,416 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\certcli.dll	
atl	3.05.2284.96.50 KB (98,816 bytes)	
	11/30/2005 6:00 AM Microsoft Corporation	
	c:\windows\system32\atl.dll	
vssapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.26 MB (1,320,960 bytes)	8/11/2008
8:51 AM	Microsoft Corporation	
	c:\windows\system32\vssapi.dll	
wmisvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	227.50 KB (232,960 bytes)	8/11/2008
8:51 AM	Microsoft Corporation	
	c:\windows\system32\wbem\wmisvc.dll	
sens	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	63.50 KB (65,024 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\sens.dll	
comsvcs	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)	
	2.13 MB (2,234,880 bytes)	8/11/2008

8:50 AM	Microsoft Corporation	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
browser	c:\windows\system32\comsvcs.dll	127.00 KB (130,048 bytes)	8/11/2008
	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	125.50 KB (128,512 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	c:\windows\system32\browser.dll	
netrap	c:\windows\system32\browser.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	26.00 KB (26,624 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\netrap.dll	
wbemcore	c:\windows\system32\wbemcore.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.22 MB (1,282,560 bytes)	8/11/2008	
8:51 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemcore.dll	
esscli	c:\windows\system32\wbem\wbemcore.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	626.50 KB (641,536 bytes)	8/11/2008	
8:51 AM	Microsoft Corporation	c:\windows\system32\wbem\esscli.dll	
wmiutils	c:\windows\system32\wbem\wmiutils.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	171.00 KB (175,104 bytes)	8/11/2008	
8:51 AM	Microsoft Corporation	c:\windows\system32\wbem\wmiutils.dll	
repdrvfs	c:\windows\system32\wbem\repdrvfs.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	353.50 KB (361,984 bytes)	8/11/2008	
8:51 AM	Microsoft Corporation	c:\windows\system32\wbem\repdrvfs.dll	
wmiprvsd	c:\windows\system32\wmiprvsd.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	743.00 KB (760,832 bytes)	8/11/2008	
8:51 AM	Microsoft Corporation	c:\windows\system32\wmiprvsd.dll	
wbemess	c:\windows\system32\wmiprvsd.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	532.50 KB (545,280 bytes)	8/11/2008	
8:51 AM	Microsoft Corporation	c:\windows\system32\wmiprvsd.dll	
ncprov	c:\windows\system32\wmiprvsd.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	73.00 KB (74,752 bytes)	9/10/2007	
4:57 PM	Microsoft Corporation	c:\windows\system32\ncprov.dll	
ntlsapi	c:\windows\system32\wbem\ntlsapi.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	11.00 KB (11,264 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\ntlsapi.dll	
actxprxy	c:\windows\system32\actxprxy.dll	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)	
	220.50 KB (225,792 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\actxprxy.dll	
netman	c:\windows\system32\actxprxy.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	454.50 KB (465,408 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\actxprxy.dll	
netshell	c:\windows\system32\actxprxy.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	2.33 MB (2,438,656 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\actxprxy.dll	
rtutils	c:\windows\system32\actxprxy.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	66.00 KB (67,584 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\rtutils.dll	
credui	c:\windows\system32\rtutils.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	202.00 KB (206,848 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\rtutils.dll	
	c:\windows\system32\credui.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	859.50 KB (880,128 bytes)	11/30/2005	
	clusapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
8:50 AM	Microsoft Corporation	127.00 KB (130,048 bytes)	8/11/2008
mpapi	c:\windows\system32\clusapi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	154.50 KB (158,208 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\mpapi.dll	
activeds	c:\windows\system32\mpapi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	348.50 KB (356,864 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\activeds.dll	
adsldpc	c:\windows\system32\activeds.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	240.50 KB (246,272 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\adsldpc.dll	
rasapi32	c:\windows\system32\adsldpc.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	410.00 KB (419,840 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\rasapi32.dll	
rasman	c:\windows\system32\rasapi32.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	95.50 KB (97,792 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\rasman.dll	
tapi32	c:\windows\system32\rasman.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	332.00 KB (340,480 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\tapi32.dll	
wzcsvc	c:\windows\system32\tapi32.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	644.50 KB (659,968 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\wzcsvc.dll	
wmi	c:\windows\system32\wzcsvc.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	5.50 KB (5,632 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\wmi.dll	
dhcpcsvc	c:\windows\system32\wmi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	220.50 KB (225,792 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\dhpcsvc.dll	
wininet	c:\windows\system32\dhpcsvc.dll	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.14 MB (1,190,912 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\wininet.dll	
wzcsapi	c:\windows\system32\wininet.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	50.50 KB (51,712 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\wzcsapi.dll	
netcfgx	c:\windows\system32\wzcsapi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.29 MB (1,354,752 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\netcfgx.dll	
winipsec	c:\windows\system32\netcfgx.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	52.50 KB (53,760 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\winipsec.dll	
wbemcons	c:\windows\system32\winipsec.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	65.50 KB (67,072 bytes)	9/10/2007	
4:57 PM	Microsoft Corporation	c:\windows\system32\wbemcons.dll	
rasdlg	c:\windows\system32\wbemcons.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	859.50 KB (880,128 bytes)	11/30/2005	
	ersvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
6:00 AM	Microsoft Corporation	31.00 KB (31,744 bytes)	11/30/2005
termsrv	c:\windows\system32\ersvc.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	355.50 KB (364,032 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\termsrv.dll	
icaapi	c:\windows\system32\termsrv.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	27.50 KB (28,160 bytes)	9/10/2007	
4:58 PM	Microsoft Corporation	c:\windows\system32\icaapi.dll	
mstlsapi	c:\windows\system32\icaapi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	188.00 KB (192,512 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\mstlsapi.dll	
rdpwsx	c:\windows\system32\mstlsapi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	170.13 KB (174,216 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\rdpwsx.dll	
rdpsnd	c:\windows\system32\rdpwsx.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	25.00 KB (25,600 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\rdpsnd.dll	
scredir	c:\windows\system32\rdpsnd.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	38.50 KB (39,424 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\scredir.dll	
cscui	c:\windows\system32\scredir.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	441.00 KB (451,584 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\scsui.dll	
msacm32	c:\windows\system32\scsui.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	31.00 KB (31,744 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\msacm32.drv	
msacm32	c:\windows\system32\msacm32.drv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	112.00 KB (114,688 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation	c:\windows\system32\msacm32.dll	
imaadp32	c:\windows\system32\msacm32.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	24.00 KB (24,576 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\imaadp32.acm	
msadp32	c:\windows\system32\imaadp32.acm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	23.50 KB (24,064 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\msadp32.acm	
msg711	c:\windows\system32\msadp32.acm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	13.50 KB (13,824 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\msg711.acm	
msgsm32	c:\windows\system32\msg711.acm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	34.50 KB (35,328 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation	c:\windows\system32\msgsm32.acm	
tssoft32	c:\windows\system32\msgsm32.acm	1.01 13.50 KB (13,824 bytes)	
	11/30/2005 6:00 AM DSP GROUP, INC.	c:\windows\system32\tssoft32.acm	

tsd32	1.03	24.50 KB (25,088 bytes)	
	11/30/2005 6:00 AM	DSP GROUP, INC.	
	c:\windows\system32\tsd32.dll		
rdpclip	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	99.00 KB (101,376 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\rdpclip.exe		
wsock32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	24.50 KB (25,088 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation		
	c:\windows\system32\wsock32.dll		
urlmon	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	1.04 MB (1,088,000 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\urlmon.dll		
explorer	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	1.30 MB (1,364,480 bytes)	8/11/2008	
8:51 AM	Microsoft Corporation		
	c:\windows\explorer.exe		
browseui	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	1.53 MB (1,605,120 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\browseui.dll		
shdocvw	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	2.33 MB (2,438,144 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\shdocvw.dll		
cryptui	5.131.3790.3959 (srv03_sp2_rtm.070216-1710)		
	705.50 KB (722,432 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\cryptui.dll		
themeui	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	531.50 KB (544,256 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\themeui.dll		
msimg32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	6.50 KB (6,656 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation		
	c:\windows\system32\msimg32.dll		
linkinfo	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	31.00 KB (31,744 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\linkinfo.dll		
ntshruui	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	184.00 KB (188,416 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\ntshruui.dll		
webcheck	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	438.50 KB (449,024 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\webcheck.dll		
stobject	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	142.50 KB (145,920 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\stobject.dll		
batmeter	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	41.50 KB (42,496 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\batmeter.dll		
powrprof	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	32.50 KB (33,280 bytes)	11/30/2005	

6:00 AM	Microsoft Corporation	
	c:\windows\system32\powrprof.dll	
drprov	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	24.00 KB (24,576 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\drprov.dll	
ntlanman	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	72.00 KB (73,728 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\ntlanman.dll	
netui0	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	130.00 KB (133,120 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\netui0.dll	
netuil	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	338.50 KB (346,624 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\netuil.dll	
davclnt	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	39.50 KB (40,448 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\davclnt.dll	
cpqteam	6/28/2005 1:10 PM Hewlett-Packard Company	
	c:\program files\hp\ncu\cpqteam.exe	
helpctr	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	1.30 MB (1,363,456 bytes)	9/10/2007
5:00 PM	Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\helpct	
r.exe	hcappres	
	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	7.50 KB (7,680 bytes)	9/10/2007
5:00 PM	Microsoft Corporation	
	c:\windows\pchealth\hcappres\hcappre	
es.dll	itss	
	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	208.50 KB (213,504 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\itss.dll	
msxml3	8.80.1185.0	
	2.04 MB (2,144,256 bytes)	11/30/2005 6:00 AM Microsoft Corporation
	c:\windows\system32\msxml3.dll	
pchshell	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	155.00 KB (158,720 bytes)	9/10/2007
5:00 PM	Microsoft Corporation	
	c:\windows\pchealth\pchshell\binaries\pchshe	
ll.dll	mlang	
	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)	
	686.00 KB (702,464 bytes)	8/11/2008
8:50 AM	Microsoft Corporation	
	c:\windows\system32\mlang.dll	
mshtml	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)	
	5.72 MB (5,999,616 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\mshtml.dll	
msls31	3.10.349.0	
	357.00 KB (365,568 bytes)	11/30/2005 6:00 AM Microsoft Corporation
	c:\windows\system32\msls31.dll	
msimtf	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	380.50 KB (389,632 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\msimtf.dll	

msctf	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	617.50 KB (632,320 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation		
	c:\windows\system32\msctf.dll		
shdoclc	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	589.50 KB (603,648 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation		
	c:\windows\system32\shdoclc.dll		
jscript	5.6.0.8832		
	976.00 KB (999,424 bytes)	11/30/2005 6:00 AM Microsoft Corporation	
	c:\windows\system32\jscript.dll		
imm32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	208.00 KB (212,992 bytes)	8/11/2008	
8:50 AM	Microsoft Corporation		
	c:\windows\system32\imm32.dll		
mshthtml	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	905.50 KB (927,232 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation		
	c:\windows\system32\mshthtml.dll		
vbscript	5.6.0.8832		
	647.00 KB (662,528 bytes)	11/30/2005 6:00 AM Microsoft Corporation	
	c:\windows\system32\vbscript.dll		
msinfo	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	635.50 KB (650,752 bytes)	9/10/2007	
5:00 PM	Microsoft Corporation		
	c:\windows\pchealth\helpctr\binaries\msinfo		
.dll	mfc42u		
	6.50.9146.0	1.39 MB (1,460,992 bytes)	
	11/30/2005 6:00 AM Microsoft Corporation		
	c:\windows\system32\mfc42u.dll		
comdlg32	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	447.00 KB (457,728 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation		
	c:\windows\system32\comdlg32.dll		
riched32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	7.00 KB (7,168 bytes)	11/30/2005	
6:00 AM	Microsoft Corporation		
	c:\windows\system32\riched32.dll		
riched20	5.31.23.1225		
	1.11 MB (1,160,192 bytes)	11/30/2005 6:00 AM Microsoft Corporation	
	c:\windows\system32\riched20.dll		
helpsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	1.52 MB (1,591,296 bytes)	9/10/2007	
5:00 PM	Microsoft Corporation		
	c:\windows\pchealth\helpctr\binaries\helpsv		
c.exe	[Services]		
Display Name	Name	State	Start Mode
	Service Type	Path	Error Control
	Start Name	Tag ID	
	Application Experience	Lookup Service	AeLookupSvc
	Running	Auto	Share Process
	c:\windows\system32\svchost.exe	-k netsvcs	
	Normal	LocalSystem	0
Alerter	Alerter	Stopped	Disabled Share Process
	c:\windows\system32\svchost.exe	-k	
localservice	localservice	Normal	NT
	AUTHORITY\LocalService	0	
Application Layer Gateway Service	ALG	Stopped	Manual Own Process

```

c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
    Manual Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
ASP.NET State Service aspnet_state
    Stopped Manual Own Process
    c:\windows\microsoft.net\framework64\v2.0.5
0727\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0
Windows Audio AudioSrv Stopped Disabled
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
Background Intelligent Transfer Service BITS
    Stopped Manual Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
Computer Browser Browser Running Auto
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
Indexing Service Cisvc Stopped Disabled
    Share Process
    c:\windows\system32\cisvc.exe Normal
    LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
    c:\windows\system32\clipsrv.exe
    Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
    clr_optimization_v2.0.50727_32
    Stopped Manual Own Process
    c:\windows\microsoft.net\framework\v2.0.507
27\mscorsvw.exe Ignore LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_x64
    clr_optimization_v2.0.50727_64
    Stopped Manual Own Process
    c:\windows\microsoft.net\framework64\v2.0.5
0727\mscorsvuw.exe Ignore LocalSystem 0
COM+ System Application COMSysApp Stopped
    Manual Own Process
    c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
    Normal LocalSystem 0
Cryptographic Services CryptSvc Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
DCOM Server Process Launcher DcomLaunch
    Running Auto Share Process
    c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0
Distributed File System Dfs Stopped
    Manual Own Process
    c:\windows\system32\dfssvc.exe
    Normal LocalSystem 0
DHCP Client Dhcp Stopped Disabled
    Share Process

```

```

c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
    dmadmin Stopped Manual Share Process
    c:\windows\system32\dmadmin.exe /com
    Normal LocalSystem 0
Logical Disk Manager dmserver Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
DNS Client Dnscache Stopped Disabled
    Share Process
    c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k winerr
    Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
    c:\windows\system32\services.exe
    Normal LocalSystem 0
COM+ Event System EventSystem Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
Help and Support helpsvc Running Auto
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
    Disabled Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
HTTP SSL HTTPFilter Stopped Manual
    Share Process
    c:\windows\system32\lsass.exe Normal
    LocalSystem 0
IAS Jet Database Access IASjet Stopped
    Manual Share Process
    c:\windows\syswow64\svchost.exe -k iasjet
    Normal LocalSystem 0
IMAPI CD-Burning COM Service ImapiService
    Stopped Disabled Own Process
    c:\windows\system32\imapி.exe Normal
    LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process c:\windows\system32\ismserv.exe
    Normal LocalSystem 0
Kerberos Key Distribution Center kdc
    Stopped Disabled Share Process
    c:\windows\system32\lsass.exe Normal
    LocalSystem 0
Server lanmanserver Running Auto
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
Workstation lanmanworkstation Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0

```

```

License Logging LicenseService Stopped
    Disabled Own Process
    c:\windows\system32\llssrv.exe
    Normal NT AUTHORITY\NetworkService 0
TCP/IP NetBIOS Helper LmHosts Stopped
    Disabled Share Process
    c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvrc
    Stopped Disabled Own Process
    c:\windows\system32\mnmsrvrc.exe
    Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
    Running Auto Own Process
    c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 0
SQL Server FullText Search (MSSQLSERVER)
    msftesql Stopped Disabled Own Process
    "c:\program files\microsoft sql
server\mssql.1\mssql\binn\msftesql.exe" -smssql.1 -
f:mssqlserver Normal LocalSystem 0
Windows Installer MSIServer Stopped Manual
    Share Process
    c:\windows\system32\msiexec.exe /v
    Normal LocalSystem 0
SQL Server (MSSQLSERVER) MSSQLSERVER
    Stopped Manual Own Process
    "c:\program files\microsoft sql
server\mssql.1\mssql\binn\sqlservr.exe" -smssqlserver
    Normal LocalSystem 0
SQL Server Active Directory Helper
    MSSQLServerADHelper Stopped Disabled Own
Process "c:\program files\microsoft sql
server\90\shared\sqladhl90.exe" Normal NT
AUTHORITY\NetworkService 0
Network DDE NetDDE Stopped Disabled
    Share Process
    c:\windows\system32\netdde.exe
    Normal LocalSystem 0
Network DDE DSDM NetDDEdsm Stopped
    Disabled Share Process
    c:\windows\system32\netdde.exe
    Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
    c:\windows\system32\lsass.exe Normal
    LocalSystem 0
Network Connections Netman Running Manual
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0
Network Location Awareness (NLA) Nla
    Stopped Disabled Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal LocalSystem 0

```

```

File Replication NtFrs Stopped Manual Own
Process c:\windows\system32\ntfrs.exe Ignore
  LocalSystem 0
NT LM Security Support Provider NtLmSsp
  Stopped Manual Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Office Source Engine ose Stopped
  Manual Own Process "c:\program
files (x86)\common files\microsoft shared\source
engine\ose.exe"
  Normal LocalSystem 0
Plug and Play PlugPlay Running Auto
  Share Process
  c:\windows\system32\services.exe
  Normal LocalSystem 0
IPSEC Services PolicyAgent Stopped
  Disabled Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Protected Storage ProtectedStorage Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Remote Access Auto Connection Manager RasAuto
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Access Connection Manager RasMan
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Desktop Help Session Manager RDSSessMgr
  Stopped Manual Own Process
  c:\windows\system32\sessmgr.exe
  Normal LocalSystem 0
Routing and Remote Access RemoteAccess
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Registry RemoteRegistry Stopped
  Disabled Share Process
  c:\windows\system32\svchost.exe -k regsvc
  Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
  Stopped Manual Own Process
  c:\windows\system32\locator.exe
  Normal NT AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k rpcss
  Normal NT AUTHORITY\NetworkService 0
Resultant Set of Policy Provider RSoPProv
  Stopped Manual Share Process

```

```

c:\windows\system32\rspoprov.exe
  Normal LocalSystem 0
Special Administration Console Helper sacsvr
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Security Accounts Manager SamSs Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem 0
Smart Card SCardSrv Stopped Manual
  Share Process
  c:\windows\system32\scardsrv.exe
  Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Stopped Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Secondary Logon seclogon Stopped Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore LocalSystem 0
System Event Notification SENS Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
  SharedAccess Stopped Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
  Running Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore LocalSystem 0
Print Spooler Spooler Stopped Disabled Own
Process c:\windows\system32\spoolsrv.exe
  Normal LocalSystem 0
SQL Server Browser SQLBrowser Stopped
  Disabled Own Process "c:\program
files (x86)\microsoft sql
server\90\shared\sqlbrowser.exe"
  Normal LocalSystem 0
SQL Server Agent (MSSQLSERVER)
  SQLSERVERAGENT Stopped Manual Own
Process "c:\program files\microsoft sql
server\mssql.1\mssql\binn\sqlagent90.exe" -i
  Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k imgsvc
  Normal NT AUTHORITY\LocalService 0
Microsoft Software Shadow Copy Provider swprv
  Stopped Manual Own Process

```

```

c:\windows\system32\svchost.exe -k swprv
  Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
  Auto Own Process
  c:\windows\system32\smlogsvc.exe
  Normal NT AUTHORITY\NetworkService 0
Telephony TapiSrv Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k tapisrv
  Normal LocalSystem 0
Terminal Services TermService Running
  Manual Share Process
  c:\windows\system32\svchost.exe -k termsvcs
  Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
  c:\windows\system32\tlntsvr.exe
  Normal NT AUTHORITY\LocalService 0
Distributed Link Tracking Server TrkSvr
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Terminal Services Session Directory Tssdis
  Stopped Disabled Own Process
  c:\windows\system32\tssdis.exe
  Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
  Stopped Manual Own Process
  c:\windows\system32\wdfmgr.exe
  Normal NT AUTHORITY\LocalService 0
Uninterruptible Power Supply UPS Stopped
  Manual Own Process
  c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
  Manual Own Process
  c:\windows\system32\vds.exe Normal
  LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vvssvc.exe Normal
  LocalSystem 0
Windows Time W32Time Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WebClient WebClient Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
  WinHttpAutoProxySvc Stopped Manual
  Share Process
  c:\windows\system32\svchost.exe -k

```

```

localservice      Normal      NT
AUTHORITY\LocalService      0
Windows Management Instrumentation      winmgmt
    Running      Auto      Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Ignore      LocalSystem      0
Portable Media Serial Number Service      WmdmPmSN
    Stopped      Manual      Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal      LocalSystem      0
Windows Management Instrumentation Driver Extensions
    Wmi      Stopped      Manual      Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal      LocalSystem      0
WMI Performance Adapter      WmiApSrv      Stopped
    Manual      Own Process
    c:\windows\system32\wbem\wmiapsrv.exe
    Normal      LocalSystem      0
Automatic Updates      wuauserv      Stopped      Disabled
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal      LocalSystem      0
Wireless Configuration      WZCSVc      Stopped
    Disabled      Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal      LocalSystem      0
Network Provisioning Service      xmlprov      Stopped
    Manual      Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal      LocalSystem      0

[Program Groups]

Group Name      Name      User Name
Accessories      Default User:Accessories
    Default User
Accessories\Accessibility      Default
User:Accessories\Accessibility      Default User
Accessories\Entertainment      Default
User:Accessories\Entertainment      Default User
Startup      Default User:Startup      Default User
Accessories      All Users:Accessories      All
Users
Accessories\Accessibility      All
Users:Accessories\Accessibility      All Users
Accessories\Communications      All
Users:Accessories\Communications      All Users
Accessories\Entertainment      All
Users:Accessories\Entertainment      All Users
Accessories\System Tools      All
Users:Accessories\System Tools      All Users
Administrative Tools      All
Users:Administrative Tools      All Users
HP System Tools      All Users:HP System Tools      All
Users
HP System Tools\HP Array Configuration Utility      All
Users:HP System Tools\HP Array Configuration Utility      All Users

```

```

HP System Tools\HP Array Configuration Utility CLI
    All Users:HP System Tools\HP Array
Configuration Utility CLI      All Users
HP System Tools\HP Array Diagnostic Utility      All
Users:HP System Tools\HP Array Diagnostic Utility All
Users
Microsoft SQL Server 2005      All Users:Microsoft SQL
Server 2005      All Users
Microsoft SQL Server 2005\Analysis Services      All
Users:Microsoft SQL Server 2005\Analysis Services All
Users
Microsoft SQL Server 2005\Configuration Tools      All
Users:Microsoft SQL Server 2005\Configuration Tools
    All Users
Microsoft SQL Server 2005\Documentation and Tutorials
    All Users:Microsoft SQL Server
2005\Documentation and Tutorials      All Users
Microsoft SQL Server 2005\Documentation and
Tutorials\Tutorials All Users:Microsoft SQL Server
2005\Documentation and Tutorials\Tutorials      All
Users
Microsoft SQL Server 2005\Performance Tools      All
Users:Microsoft SQL Server 2005\Performance Tools All
Users
Microsoft Visual Studio 2005      All Users:Microsoft
Visual Studio 2005 All Users
Microsoft Visual Studio 2005\Visual Studio Tools      All
Users:Microsoft Visual Studio 2005\Visual Studio
Tools      All Users
Startup      All Users:Startup      All Users
Accessories      NT AUTHORITY\SYSTEM:Accessories
    NT AUTHORITY\SYSTEM
Accessories\Accessibility      NT
AUTHORITY\SYSTEM:Accessories\Accessibility      NT
AUTHORITY\SYSTEM
Accessories\Entertainment      NT
AUTHORITY\SYSTEM:Accessories\Entertainment      NT
AUTHORITY\SYSTEM
Startup      NT AUTHORITY\SYSTEM:Startup      NT
AUTHORITY\SYSTEM
Accessories      B2\Administrator:Accessories
    B2\Administrator
Accessories\Accessibility      B2\Administrator:Accessories\Accessibility
    B2\Administrator
Accessories\Entertainment      B2\Administrator:Accessories\Entertainment
    B2\Administrator
Administrative Tools      B2\Administrator:Administrative Tools
    B2\Administrator
AMD System Analysis Tools      B2\Administrator:AMD
System Analysis Tools      B2\Administrator
AMD System Analysis Tools\CpuSpy
    B2\Administrator:AMD System Analysis
Tools\CpuSpy      B2\Administrator
AMD System Analysis Tools\DebugExec
    B2\Administrator:AMD System Analysis
Tools\DebugExec      B2\Administrator
AMD System Analysis Tools\HotkeyEvent
    B2\Administrator:AMD System Analysis
Tools\HotkeyEvent      B2\Administrator

```

```

AMD System Analysis Tools\mreport
    B2\Administrator:AMD System Analysis
Tools\mreport      B2\Administrator
AMD System Analysis Tools\MultEvent
    B2\Administrator:AMD System Analysis
Tools\MultEvent      B2\Administrator
AMD System Analysis Tools\MultiProbe
    B2\Administrator:AMD System Analysis
Tools\MultiProbe      B2\Administrator
AMD System Analysis Tools\SmartTrigger
    B2\Administrator:AMD System Analysis
Tools\SmartTrigger      B2\Administrator
Iometer 2006.07.27      B2\Administrator:Iometer
2006.07.27      B2\Administrator
KrView      B2\Administrator:KrView
    B2\Administrator
Startup      B2\Administrator:Startup
    B2\Administrator

[Startup Programs]

Program      Command      User Name Location
desktop      desktop.ini      NT AUTHORITY\SYSTEM
Startup
desktop      desktop.ini      B2\Administrator
Startup
desktop      desktop.ini      .DEFAULT Startup
desktop      desktop.ini      All Users Common
Startup
CPQTEAM      "c:\program files\hp\ncu\cpqteam.exe"      All
Users
HKLM\SOFTWARE\Microsoft\Windows\CurrentVers
ion\Run

[OLE Registration]

Object      Local Server
Sound (OLE2)      sndrec32.exe
Media Clip      mplay32.exe
Video Clip      mplay32.exe /avi
MIDI Sequence      mplay32.exe /mid
Sound      Not Available
Media Clip      Not Available
WordPad Document      "%programfiles%\windows
nt\accessories\wordpad.exe"
Bitmap Image      mspaint.exe

[Windows Error Reporting]

Time      Type      Details

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category
]
[Summary]

Item      Value

```

```

Version 6.0.3790.3959
Build 63790.3959
Application Path C:\Program Files\Internet
Explorer
Language English (United States)
Active Printer Not Available

Cipher Strength 128-bit
Content Advisor Disabled
IEAK Install No

[File Versions]

File Version Size Date Path
Company
actxprxy.dll 6.0.3790.3959 221 KB
2/17/2007 12:02:52 AM
C:\WINDOWS\system32 Microsoft Corporation

advpack.dll 6.0.3790.3959 146 KB
2/17/2007 12:03:10 AM
C:\WINDOWS\system32 Microsoft Corporation

asctrcls.ocx 6.0.3790.1830 147 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

browselc.dll 6.0.3790.1830 63 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

browseui.dll 6.0.3790.3959 1,568 KB
2/17/2007 12:05:24 AM
C:\WINDOWS\system32 Microsoft Corporation

cdfview.dll 6.0.3790.3959 216 KB
2/17/2007 12:05:40 AM
C:\WINDOWS\system32 Microsoft Corporation

comctl32.dll 5.82.3790.3959 935 KB
2/17/2007 12:09:08 AM
C:\WINDOWS\system32 Microsoft Corporation

dxtrans.dll 6.3.3790.3959 325 KB
2/17/2007 12:18:34 AM
C:\WINDOWS\system32 Microsoft Corporation

dxtmsft.dll 6.3.3790.3959 549 KB
2/17/2007 12:18:32 AM
C:\WINDOWS\system32 Microsoft Corporation

iecont.dll <File Missing> Not Available
Not Available Not Available Not Available
Available
iecontlc.dll <File Missing> Not Available
Not Available Not Available Not Available
Available
iedkcs32.dll 16.0.3790.3959 417 KB
2/17/2007 12:29:36 AM
C:\WINDOWS\system32 Microsoft Corporation

```

```

iepeers.dll 6.0.3790.3959 362 KB
2/17/2007 12:29:38 AM
C:\WINDOWS\system32 Microsoft Corporation

iesetup.dll 6.0.3790.1830 71 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

ieuinit.inf Not Available 24 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Not Available

iexplore.exe 6.0.3790.1830 94 KB
11/30/2005 7:00:00 AM
C:\Program
Files\Internet Explorer Microsoft Corporation

imgutil.dll 6.0.3790.3959 61 KB
2/17/2007 12:30:36 AM
C:\WINDOWS\system32 Microsoft Corporation

inetcpl.cpl 6.0.3790.3959 431 KB
2/17/2007 12:30:40 AM
C:\WINDOWS\system32 Microsoft Corporation

inetcplc.dll 6.0.3790.1830 110 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

inseng.dll 6.0.3790.3959 147 KB
2/17/2007 12:30:52 AM
C:\WINDOWS\system32 Microsoft Corporation

mlang.dll 6.0.3790.3959 686 KB 2/17/2007
12:36:42 AM
C:\WINDOWS\system32 Microsoft
Corporation

msencode.dll <File Missing> Not Available
Not Available Not Available Not Available
Available
mshta.exe 6.0.3790.1830 38 KB 11/30/2005
7:00:00 AM
C:\WINDOWS\system32 Microsoft
Corporation

mshtml.dll 6.0.3790.3959 5,859 KB
2/17/2007 12:38:38 AM
C:\WINDOWS\system32 Microsoft Corporation

mshtml.tlb 6.0.3790.1830 1,320 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mshtimed.dll 6.0.3790.3959 906 KB
2/17/2007 12:38:42 AM
C:\WINDOWS\system32 Microsoft Corporation

mshtmller.dll 6.0.3790.1830 56 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msident.dll 6.0.3790.1830 69 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msidntld.dll 6.0.3790.1830 16 KB
11/30/2005 7:00:00 AM

```

```

C:\WINDOWS\system32 Microsoft Corporation

msieftp.dll 6.0.3790.3959 369 KB
2/17/2007 12:38:50 AM
C:\WINDOWS\system32 Microsoft Corporation

msrating.dll 6.0.3790.3959 240 KB
2/17/2007 12:39:20 AM
C:\WINDOWS\system32 Microsoft Corporation

mstime.dll 6.0.3790.3959 880 KB
2/17/2007 12:39:26 AM
C:\WINDOWS\system32 Microsoft Corporation

occache.dll 6.0.3790.3959 126 KB
2/17/2007 12:41:48 AM
C:\WINDOWS\system32 Microsoft Corporation

proctexe.ocx <File Missing> Not Available
Not Available Not Available Not Available
Available
sendmail.dll 6.0.3790.3959 64 KB
2/17/2007 12:54:24 AM
C:\WINDOWS\system32 Microsoft Corporation

shdoclc.dll 6.0.3790.1830 590 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

shdocvw.dll 6.0.3790.3959 2,381 KB
2/17/2007 12:54:58 AM
C:\WINDOWS\system32 Microsoft Corporation

shfolder.dll 6.0.3790.1830 34 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

shlwapi.dll 6.0.3790.3959 607 KB
2/17/2007 12:55:32 AM
C:\WINDOWS\system32 Microsoft Corporation

tdc.ocx 1.3.0.3130 91 KB 11/30/2005
7:00:00 AM
C:\WINDOWS\system32 Microsoft
Corporation

url.dll 6.0.3790.1830 40 KB 11/30/2005
7:00:00 AM
C:\WINDOWS\system32 Microsoft
Corporation

urlmon.dll 6.0.3790.3959 1,063 KB
2/17/2007 1:00:44 AM
C:\WINDOWS\system32 Microsoft Corporation

webcheck.dll 6.0.3790.3959 439 KB
2/17/2007 1:02:26 AM
C:\WINDOWS\system32 Microsoft Corporation

wininet.dll 6.0.3790.3959 1,163 KB
2/17/2007 1:02:54 AM
C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]

```

Item	Value		
Connection Preference	Never dial		
LAN Settings			
AutoConfigProxy	wininet.dll		
AutoProxyDetectMode	Disabled		
AutoConfigURL			
Proxy	Disabled		
ProxyServer			
ProxyOverride			
[Cache]			
[Following are sub-categories of this main category]			
[Summary]			
Item	Value		
Page Refresh Type	Automatic		
Temporary Internet Files Folder	C:\Documents and Settings\Administrator\Local Settings\Temporary Internet Files		
Total Disk Space	Not Available		
Available Disk Space	Not Available		
Maximum Cache Size	Not Available		
Available Cache Size	Not Available		
[List of Objects]			
Program File	Status	CodeBase	
No cached object information available			
[Content]			
[Following are sub-categories of this main category]			
[Summary]			
Item	Value		
Content Advisor	Disabled		
[Personal Certificates]			
Issued To	Issued By	Validity	Signature Algorithm
No personal certificate information available			
[Other People Certificates]			
Issued To	Issued By	Validity	Signature Algorithm
No other people certificate information available			
[Publishers]			
Name			
No publisher information available			
[Security]			

Zone	Security Level
My Computer	Custom
Local intranet	Custom
Trusted sites	Custom
Internet	Custom
Restricted sites	Custom

Server Bus Performance Driver Registry Parameters

Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters
 Class Name: <NO CLASS>
 Last Write Time: 10/28/2008 - 9:42 AM
 Value 0
 Name: CompletionMode
 Type: REG_DWORD
 Data: 0x2

Value 1
 Name: CosTimerRate
 Type: REG_DWORD
 Data: 0x2

Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters\Controller
 Class Name: <NO CLASS>
 Last Write Time: 2/25/2008 - 9:44 AM
 Value 0
 Name: CompletionMode
 Type: REG_DWORD
 Data: 0x1

Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Security
 Class Name: <NO CLASS>
 Last Write Time: 9/13/2007 - 9:30 AM
 Value 0
 Name: Security
 Type: REG_BINARY
 Data:
 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
 00 00 00Ä.....
 00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
 80 14 00 0.....
 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
 00 00 00 Ÿ.....
 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
 01 02 00Ÿ...
 00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
 00 18 00
 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
 00 00 00 Ÿ.....
 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
 01 00 00
 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
 01 02 00
 00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
 00 14 00
 00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
 00 00 00
 000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
 00 00 05Ÿ.....
 000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
 00 00 05#.....
 000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
 00 00 00

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Enum
 Class Name: <NO CLASS>
 Last Write Time: 10/28/2008 - 9:46 AM
 Value 0
 Name: Count
 Type: REG_DWORD
 Data: 0x8

 Value 1
 Name: NextInstance
 Type: REG_DWORD
 Data: 0x8

 Value 2
 Name: 0
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&22febb
 0d&0&0060

 Value 3
 Name: 1
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&b98f5c
 4&0&0068

 Value 4
 Name: 2
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&13700c
 ed&0&0070

 Value 5
 Name: 3
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&300c82
 40&0&0058

 Value 6
 Name: 4
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&137aba
 ea&0&0060

 Value 7
 Name: 5
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&1b1cf5
 e7&0&0068

 Value 8
 Name: 6

Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&3ec0cc
 a&0&0070

 Value 9
 Name: 7
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_00\4&24cf26
 e8&0&01088

Data: Smart Array Controllers Non-Miniport Disk Driver

 Value 6
 Name: Group
 Type: REG_SZ
 Data: Primary Disk

 Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd\Security
 Class Name: <NO CLASS>
 Last Write Time: 9/13/2007 - 9:31 AM
 Value 0
 Name: Security
 Type: REG_BINARY
 Data:
 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
 00 00 00Ä.....
 00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
 80 14 00 0.....
 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
 00 00 00 Ÿ.....
 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
 01 02 00ŷ...
 00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
 00 18 00
 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
 00 00 00 Ÿ.....
 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
 01 00 00
 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
 01 02 00
 00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
 00 14 00
 00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
 00 00 00
 000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
 00 00 05ŷ.....
 000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
 00 00 05 ...#.
 000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
 00 00 00

 Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd\Enum
 Class Name: <NO CLASS>
 Last Write Time: 10/28/2008 - 9:47 AM
 Value 0
 Name: Count
 Type: REG_DWORD
 Data: 0x24

 Value 1
 Name: NextInstance
 Type: REG_DWORD
 Data: 0x24

Value 2 Name: 1 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&17a88d94&0& 000004000000000	Value 11 Name: 10 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8b705fb&0&0 000004000000000	Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1167f8b&0&0 300004000000000
Value 3 Name: 2 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&17a88d94&0& 010000400000000	Value 12 Name: 11 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8b705fb&0&0 100004000000000	Value 20 Name: 19 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1167f8b&0&0 400004000000000
Value 4 Name: 3 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&17a88d94&0& 020000400000000	Value 13 Name: 12 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8b705fb&0&0 200004000000000	Value 21 Name: 20 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1cc70be&0&0 000004000000000
Value 5 Name: 4 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&17a88d94&0& 030000400000000	Value 14 Name: 13 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8b705fb&0&0 300004000000000	Value 22 Name: 21 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1cc70be&0&0 100004000000000
Value 6 Name: 5 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&19f386c&0&0 000004000000000	Value 15 Name: 14 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&8b705fb&0&0 400004000000000	Value 23 Name: 22 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1cc70be&0&0 200004000000000
Value 7 Name: 6 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&19f386c&0&0 100004000000000	Value 16 Name: 15 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1167f8b&0&0 000004000000000	Value 24 Name: 23 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1cc70be&0&0 300004000000000
Value 8 Name: 7 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&19f386c&0&0 200004000000000	Value 17 Name: 16 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1167f8b&0&0 100004000000000	Value 25 Name: 24 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1cc70be&0&0 400004000000000
Value 9 Name: 8 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&19f386c&0&0 300004000000000	Value 18 Name: 17 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1167f8b&0&0 200004000000000	Value 26 Name: 25 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&6352f4d&0&0 000004000000000
Value 10 Name: 9 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&19f386c&0&0 400004000000000	Value 19 Name: 18 Type: REG_SZ	Value 27 Name: 26 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&6352f4d&0&0 100004000000000
		Value 28 Name: 27

Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&6352f4d&0&0 200004000000000
Value 29	
Name:	28
Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&6352f4d&0&0 300004000000000
Value 30	
Name:	29
Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&6352f4d&0&0 400004000000000
Value 31	
Name:	30
Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&10fc6f5e&0& 000004000000000
Value 32	
Name:	31
Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&10fc6f5e&0& 010004000000000
Value 33	
Name:	32
Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&10fc6f5e&0& 020004000000000
Value 34	
Name:	33
Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&10fc6f5e&0& 030004000000000
Value 35	
Name:	34
Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&10fc6f5e&0& 040004000000000
Value 36	
Name:	35
Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&68d3c3a&0&0 000004000000000
Value 37	

Name:	0
Type:	REG_SZ
Data:	HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&68d3c3a&0&0 100004000000000

Server Network Driver Registry Parameters (NIC 1)

Key Name:	HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class \{4D36E97D-E325-11CE-BFC1-08002BE10318}\0056
Class Name:	<NO CLASS>
Last Write Time:	10/17/2008 - 1:47 PM
Value 0	
Name:	create_pdo_flag
Type:	REG_SZ
Data:	4
Value 1	
Name:	mtu
Type:	REG_SZ
Data:	1500
Value 2	
Name:	InfPath
Type:	REG_SZ
Data:	oem33.inf
Value 3	
Name:	InfSection
Type:	REG_SZ
Data:	NC37li_inst_amd64
Value 4	
Name:	ProviderName
Type:	REG_SZ
Data:	Hewlett-Packard Company
Value 5	
Name:	DriverDateData
Type:	REG_BINARY
Data:	00 c0 fe 5c 0e fc c8 01 - .Ãþ\.Ã‰.
Value 6	
Name:	DriverDate
Type:	REG_SZ
Data:	8-12-2008

Value 7	
Name:	DriverVersion
Type:	REG_SZ
Data:	4.4.24.0
Value 8	
Name:	MatchingDeviceId
Type:	REG_SZ
Data:	pci\ven_14e4&dev_164a&subsys_1709103c
Value 9	
Name:	DriverDesc
Type:	REG_SZ
Data:	HP NC37li Virtual Bus Device
Value 10	
Name:	target_ip
Type:	REG_SZ
Data:	1500
Value 11	
Name:	optimize_ip
Type:	REG_SZ
Data:	0
Value 12	
Name:	enable_fir
Type:	REG_SZ
Data:	0
Value 13	
Name:	wol_cap
Type:	REG_SZ
Data:	3
Value 14	
Name:	*SpeedDuplex
Type:	REG_SZ
Data:	0
Value 15	
Name:	CoInstallers32
Type:	REG_MULTI_SZ
Data:	wdfcoinstaller01007.dll, WdfCoInstaller
Key Name:	HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class \{4D36E97D-E325-11CE-BFC1-08002BE10318}\0056\ndi
Class Name:	<NO CLASS>
Last Write Time:	9/10/2007 - 4:30 PM
Key Name:	HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class \{4D36E97D-E325-11CE-BFC1-08002BE10318}\0056\ndi\params
Class Name:	<NO CLASS>
Last Write Time:	9/11/2007 - 9:57 AM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-
08002BE10318\}0056\ndi\params*SpeedDuplex
Class Name: <NO CLASS>
Last Write Time: 9/11/2007 - 9:57 AM

Value 0
Name: paramDesc
Type: REG_SZ
Data: Speed & Duplex

Value 1
Name: default
Type: REG_SZ
Data: 0

Value 2
Name: type
Type: REG_SZ
Data: enum

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-
08002BE10318\}0056\ndi\params*SpeedDuplex\enum
Class Name: <NO CLASS>
Last Write Time: 9/11/2007 - 9:57 AM

Value 0
Name: 0
Type: REG_SZ
Data: Auto

Value 1
Name: 1
Type: REG_SZ
Data: 10 Mb Half

Value 2
Name: 2
Type: REG_SZ
Data: 10 Mb Full

Value 3
Name: 3
Type: REG_SZ
Data: 100 Mb Half

Value 4
Name: 4
Type: REG_SZ
Data: 100 Mb Full

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-
08002BE10318\}0056\ndi\params\mtu
Class Name: <NO CLASS>
Last Write Time: 10/17/2008 - 1:47 PM

Value 0
Name: paramdesc

Type: REG_SZ
Data: JumboPacket

Value 1
Name: default
Type: REG_SZ
Data: 1500

Value 2
Name: type
Type: REG_SZ
Data: dword

Value 3
Name: min
Type: REG_SZ
Data: 1500

Value 4
Name: max
Type: REG_SZ
Data: 9000

Value 5
Name: step
Type: REG_SZ
Data: 500

Value 6
Name: base
Type: REG_SZ
Data: 10

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-
08002BE10318\}0056\ndi\params\wol_cap
Class Name: <NO CLASS>
Last Write Time: 9/11/2007 - 9:57 AM

Value 0
Name: paramDesc
Type: REG_SZ
Data: Wake Up Capabilities

Value 1
Name: default
Type: REG_SZ
Data: 3

Value 2
Name: type
Type: REG_SZ
Data: enum

Value 3
Name: control
Type: REG_SZ
Data: 1

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-
08002BE10318\}0056\ndi\params\wol_cap\enum
Class Name: <NO CLASS>
Last Write Time: 9/11/2007 - 9:57 AM

Value 0
Name: 0
Type: REG_SZ
Data: None

Value 1
Name: 1
Type: REG_SZ
Data: Magic Packet

Value 2
Name: 2
Type: REG_SZ
Data: Wake Up Frame

Value 3
Name: 3
Type: REG_SZ
Data: Both

Server Network Driver Registry Parameters (NIC 2)

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-08002BE10318\}0057
Class Name: <NO CLASS>
Last Write Time: 10/17/2008 - 1:47 PM

Value 0
Name: create_pdo_flag
Type: REG_SZ
Data: 4

Value 1
Name: mtu
Type: REG_SZ
Data: 1500

Value 2
Name: InfPath
Type: REG_SZ
Data: oem33.inf

Value 3
Name: InfSection

Type: REG_SZ Data: NC371i_inst_amd64	Name: Coinstallers32 Type: REG_MULTI_SZ Data: wdfcoinstaller01007.dll, WdfCoInstaller	Value 3 Name: 3 Type: REG_SZ Data: 100 Mb Half
Value 4 Name: ProviderName Type: REG_SZ Data: Hewlett-Packard Company	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class \{4D36E97D-E325-11CE-BFC1-08002BE10318}\0057\ndi	Value 4 Name: 4 Type: REG_SZ Data: 100 Mb Full
Value 5 Name: DriverDateData Type: REG_BINARY Data: 00 c0 fe 5c 0e fc c8 01 - .Ap\.üE.	Class Name: <NO CLASS> Last Write Time: 9/10/2007 - 4:30 PM	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class \{4D36E97D-E325-11CE-BFC1- 08002BE10318}\0057\ndi\params\mtu
Value 6 Name: DriverDate Type: REG_SZ Data: 8-12-2008	Class Name: <NO CLASS> Last Write Time: 9/11/2007 - 9:57 AM	Class Name: <NO CLASS> Last Write Time: 10/17/2008 - 1:47 PM
Value 7 Name: DriverVersion Type: REG_SZ Data: 4.4.24.0	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class \{4D36E97D-E325-11CE-BFC1- 08002BE10318}\0057\ndi\params*SpeedDuplex	Value 0 Name: paramdesc Type: REG_SZ Data: JumboPacket
Value 8 Name: MatchingDeviceId Type: REG_SZ Data: pci\ven_14e4&dev_164a&subsys_1709103c	Class Name: <NO CLASS> Last Write Time: 9/11/2007 - 9:57 AM	Value 1 Name: default Type: REG_SZ Data: 1500
Value 9 Name: DriverDesc Type: REG_SZ Data: HP NC371i Virtual Bus Device	Value 0 Name: paramDesc Type: REG_SZ Data: Speed & Duplex	Value 2 Name: type Type: REG_SZ Data: dword
Value 10 Name: target_ips Type: REG_SZ Data: 1500	Value 1 Name: default Type: REG_SZ Data: 0	Value 3 Name: min Type: REG_SZ Data: 1500
Value 11 Name: optimize_ips Type: REG_SZ Data: 0	Value 2 Name: type Type: REG_SZ Data: enum	Value 4 Name: max Type: REG_SZ Data: 9000
Value 12 Name: enable_fir Type: REG_SZ Data: 0	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class \{4D36E97D-E325-11CE-BFC1- 08002BE10318}\0057\ndi\params*SpeedDuplex\enum	Value 5 Name: step Type: REG_SZ Data: 500
Value 13 Name: wol_cap Type: REG_SZ Data: 3	Class Name: <NO CLASS> Last Write Time: 9/11/2007 - 9:57 AM	Value 6 Name: base Type: REG_SZ Data: 10
Value 14 Name: *SpeedDuplex Type: REG_SZ Data: 0	Value 0 Name: 0 Type: REG_SZ Data: Auto	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class \{4D36E97D-E325-11CE-BFC1- 08002BE10318}\0057\ndi\params\wol_cap
Value 15	Value 1 Name: 1 Type: REG_SZ Data: 10 Mb Half	Class Name: <NO CLASS> Last Write Time: 9/11/2007 - 9:57 AM
	Value 2 Name: 2 Type: REG_SZ Data: 10 Mb Full	Value 0 Name: paramDesc Type: REG_SZ

Data: Wake Up Capabilities

Value 1
Name: default
Type: REG_SZ
Data: 3

Value 2
Name: type
Type: REG_SZ
Data: enum

Value 3
Name: control
Type: REG_SZ
Data: 1

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-
08002B10318}\0057\ndi\params\wol_cap\enum
Class Name: <NO CLASS>
Last Write Time: 9/11/2007 - 9:57 AM

Value 0
Name: 0
Type: REG_SZ
Data: None

Value 1
Name: 1
Type: REG_SZ
Data: Magic Packet

Value 2
Name: 2
Type: REG_SZ
Data: Wake Up Frame

Value 3
Name: 3
Type: REG_SZ
Data: Both

Web Client Hardware Configuration

System Information report written at: 10/21/08

15:00:06

System Name: CL121

[System Summary]

Item Value

OS Name Microsoft(R) Windows(R) Server 2003,
Standard Edition
Version 5.2.3790 Service Pack 2 Build 3790
Other OS Description R2
OS Manufacturer Microsoft Corporation
System Name CL121
System Manufacturer HP
System Model ProLiant DL360 G5
System Type X86-based PC
Processor x86 Family 6 Model 23 Stepping 6
GenuineIntel ~2833 Mhz
Processor x86 Family 6 Model 23 Stepping 6
GenuineIntel ~2833 Mhz
Processor x86 Family 6 Model 23 Stepping 6
GenuineIntel ~2833 Mhz
Processor x86 Family 6 Model 23 Stepping 6
GenuineIntel ~2833 Mhz
BIOS Version/Date HP P58, 1/24/2008
SMBIOS Version 2.4
Windows Directory C:\WINDOWS
System Directory C:\WINDOWS\system32
Boot Device \Device\HarddiskVolume1
Locale United States
Hardware Abstraction Layer Version =
"5.2.3790.3959 (srv03_sp2_rtm.070216-1710)"
User Name Not Available
Time Zone Central Daylight Time
Total Physical Memory 1,021.86 MB
Available Physical Memory 815.68 MB
Total Virtual Memory 2.91 GB
Available Virtual Memory 2.81 GB
Page File Space 2.00 GB
Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device Status
I/O Port 0x00000000-0x00000CF7 PCI bus
I/O Port 0x00000000-0x00000CF7 Direct memory access controller

I/O Port 0x000002F8-0x000002FF Motherboard resources
I/O Port 0x000002F8-0x000002FF Communications Port (COM2)

IRQ 22 HP iLO Management Channel Interface Driver

IRQ 22 Standard Universal PCI to USB Host Controller

IRQ 16 PCI standard PCI-to-PCI bridge
IRQ 16 Smart Array P400I Controller
IRQ 16 Standard Universal PCI to USB Host Controller
IRQ 16 Standard Enhanced PCI to USB Host Controller

IRQ 17 PCI standard PCI-to-PCI bridge
IRQ 17 Standard Universal PCI to USB Host Controller

IRQ 18 PCI standard PCI-to-PCI bridge
IRQ 18 HP NC373i Virtual Bus Device
IRQ 18 Standard Universal PCI to USB Host Controller

IRQ 19 HP NC373i Virtual Bus Device
IRQ 19 Standard Universal PCI to USB Host Controller

Memory Address 0xA0000-0xBFFFF PCI bus
Memory Address 0xA0000-0xBFFFF ATI ES1000

Memory Address 0xFA000000-0xFBFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xFA000000-0xFBFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xFA000000-0xFBFFFF HP NC373i
Virtual Bus Device

Memory Address 0xF8000000-0xF9FFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xF8000000-0xF9FFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xF8000000-0xF9FFFFFF HP NC373i
Virtual Bus Device

I/O Port 0x00004000-0x00004FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00004000-0x00004FFF Smart Array P400I Controller

[DMA]

Resource Device Status
Channel 7 Direct memory access controller OK

[Forced Hardware]

Device PNP Device ID

[I/O]

Resource Device Status
0x00000000-0x00000CF7 PCI bus OK
0x00000000-0x00000CF7 Direct memory access controller OK
0x00000D00-0x0000FFFF PCI bus OK
0x00004000-0x00004FFF PCI standard PCI-to-PCI bridge OK
0x00004000-0x00004FFF Smart Array P400I Controller OK
0x00001000-0x0000101F Standard Universal PCI to USB Host Controller OK
0x00001020-0x0000103F Standard Universal PCI to USB Host Controller OK

0x000001040-0x0000105F to USB Host Controller OK	Standard Universal PCI	0x00000040-0x00000043	System timer	OK	IRQ 19 Standard Universal PCI to USB Host Controller OK
0x000001060-0x0000107F to USB Host Controller OK	Standard Universal PCI	0x00000080-0x0000008F controller OK	Direct memory access		IRQ 23 ATI ES1000 OK
0x000003000-0x000030FF ATI ES1000 OK	ATI ES1000	0x000000C0-0x000000DF controller OK	Direct memory access		IRQ 5 HP ProLiant iLO 2 Legacy Support Function OK
0x0000003B0-0x000003BB ATI ES1000 OK	ATI ES1000	0x00000061-0x00000061	System speaker	OK	IRQ 22 HP iLO Management Channel Interface Driver OK
0x0000003C0-0x000003DF ATI ES1000 OK	ATI ES1000	0x00000060-0x00000060 Microsoft Natural PS/2 Keyboard OK	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK	IRQ 22 Standard Universal PCI to USB Host Controller OK
0x000002800-0x000028FF Legacy Support Function OK	HP ProLiant iLO 2	0x00000064-0x00000064 Microsoft Natural PS/2 Keyboard OK	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK	IRQ 21 HP ProLiant iLO 2 Management Controller Driver OK
0x000003400-0x000034FF Channel Interface Driver OK	HP iLO Management	0x0000002E-0x0000002F OK	Extended IO Bus	OK	IRQ 0 System timer OK
0x000003800-0x0000381F to USB Host Controller OK	Standard Universal PCI	0x0000004E-0x0000004F ISAPNP Read Data Port OK	Extended IO Bus	OK	IRQ 1 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK
0x00000A790-0x00000A79 OK	ISAPNP Read Data Port	0x00000620-0x0000065F OK	Extended IO Bus	OK	IRQ 12 PS/2 Compatible Mouse OK
0x000002790-0x00000279 OK	ISAPNP Read Data Port	0x00000680-0x0000069F OK	Extended IO Bus	OK	IRQ 4 Communications Port (COM1) OK
0x000002740-0x00000277 OK	ISAPNP Read Data Port	0x00000600-0x0000061F OK	Extended IO Bus	OK	IRQ 3 Communications Port (COM2) OK
0x000000700-0x00000077 OK	Motherboard resources	0x00000660-0x0000067F OK	Extended IO Bus	OK	[Memory]
0x0000004080-0x0000040F OK	Motherboard resources	0x00000300-0x0000030F OK	Extended IO Bus	OK	Resource Device Status 0xA0000-0xBFFFF PCI bus OK
0x0000004D00-0x000004D1 OK	Motherboard resources	0x000003F8-0x000003FF (COM1) OK	Communications Port		0xA0000-0xBFFFF ATI ES1000 OK
0x000000200-0x0000003F OK	Motherboard resources	0x00000500-0x0000050F PCI IDE Controller OK	Standard Dual Channel		0x40000000-0xDFFFFFF PCI bus OK
0x000000A00-0x000000BF OK	Motherboard resources	0x000001F0-0x000001F7 OK	Primary IDE Channel	OK	0xF0000000-0xFEFFFFFF PCI bus OK
0x000000900-0x0000009F OK	Motherboard resources	0x000003F6-0x000003F6 OK	Primary IDE Channel	OK	0xFDF00000-0xFDFFFFFF PCI standard PCI-to-PCI bridge OK
0x000000500-0x00000053 OK	Motherboard resources	0x00000170-0x00000177 OK	Secondary IDE Channel		0xFDD00000-0xFDEFFFFFF PCI standard PCI-to-PCI bridge OK
0x000000700-0x0000071F OK	Motherboard resources	0x00000376-0x00000376 OK	Secondary IDE Channel		0xFDE00000-0xFDEFFFFFF Smart Array P400I Controller OK
0x000000800-0x0000083F OK	Motherboard resources	[IRQs]			0xFDE00000-0xFDEFFFFFF Smart Array P400I Controller OK
0x000000900-0x0000097F OK	Motherboard resources	Resource Device Status IRQ 9 Microsoft ACPI-Compliant System OK			0xF8000000-0xF9FFFFFF PCI standard PCI-to-PCI bridge OK
0x000000100-0x0000001F OK	Motherboard resources	IRQ 16 PCI standard PCI-to-PCI bridge	OK		0xF8000000-0xF9FFFFFF PCI standard PCI-to-PCI bridge OK
0x00000C800-0x00000C83 OK	Motherboard resources	IRQ 16 Smart Array P400I Controller OK			0xFA000000-0xFBFFFFFF PCI standard PCI-to-PCI bridge OK
0x00000CD40-0x00000CD7 OK	Motherboard resources	IRQ 16 Standard Universal PCI to USB Host Controller OK			0xF7DF0000-0xF7DF03FF Standard Enhanced PCI to USB Host Controller OK
0x00000F500-0x00000F58 OK	Motherboard resources	Controller OK			0xD8000000-0xDFFFFFF ATI ES1000 OK
0x000000F00-0x000000F0 OK	Motherboard resources	IRQ 16 Standard Enhanced PCI to USB Host Controller OK			0xF7FFF0000-0xF7FFFFFF ATI ES1000 OK
0x00000CA00-0x00000CA1 OK	Motherboard resources	IRQ 17 PCI standard PCI-to-PCI bridge	OK		0xF7FE0000-0xF7FE01FF HP ProLiant iLO 2 Legacy Support Function OK
0x00000CA40-0x00000CA5 OK	Motherboard resources	IRQ 17 Standard Universal PCI to USB Host Controller OK			0xF7FD0000-0xF7FD07FF HP iLO Management Channel Interface Driver OK
0x000002F80-0x000002FF OK	Motherboard resources	IRQ 18 PCI standard PCI-to-PCI bridge	OK		0xF7FC0000-0xF7FC1FFF HP iLO Management Channel Interface Driver OK
0x000002F80-0x000002FF (COM2) OK	Communications Port	IRQ 18 HP NC373i Virtual Bus Device OK			0xF7F00000-0xF7F7FFFF HP iLO Management Channel Interface Driver OK
0x00000CA20-0x00000CA3 OK	HP NULL IPMI Controller	IRQ 18 Standard Universal PCI to USB Host Controller OK			0xF7EF0000-0xF7EF00FF HP ProLiant iLO 2 Management Controller Driver OK
		IRQ 19 HP NC373i Virtual Bus Device OK			

0x0E000000-0xFFFFFFFF	Motherboard resources
OK	
0xFE000000-0xFFFFFFFF	Motherboard resources
OK	
0xFED00000-0xFED003FF	High precision event
timer OK	
[Components]	

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description	
Status	File	Version	Size
c:\windows\system32\tssoft32.acm	DSP GROUP, INC.	OK	
C:\WINDOWS\system32\TSSOFT32.ACM			
1.01	9.50 KB (9,728 bytes)		
11/30/2005 6:00 AM			
c:\windows\system32\msgsm32.acm	Microsoft Corporation	OK	
C:\WINDOWS\system32\MSGSM32.ACM			
5.2.3790.0 (srv03_rtm.030324-2048)			
20.50 KB (20,992 bytes)		11/30/2005	
6:00 AM			
c:\windows\system32\msg711.acm	Microsoft Corporation	OK	
C:\WINDOWS\system32\MSG711.ACM			
5.2.3790.0 (srv03_rtm.030324-2048)			
10.00 KB (10,240 bytes)		11/30/2005	
6:00 AM			
c:\windows\system32\msadp32.acm	Microsoft Corporation	OK	
C:\WINDOWS\system32\MSADP32.ACM			
5.2.3790.0 (srv03_rtm.030324-2048)			
14.50 KB (14,848 bytes)		11/30/2005	
6:00 AM			
c:\windows\system32\imaadp32.acm	Microsoft Corporation	OK	
C:\WINDOWS\system32\IMAADP32.ACM			
5.2.3790.0 (srv03_rtm.030324-2048)			
15.50 KB (15,872 bytes)		11/30/2005	
6:00 AM			
c:\windows\system32\msg723.acm	Microsoft Corporation	OK	
C:\WINDOWS\system32\MSG723.ACM			
5.2.3790.3959	120.00 KB (122,880 bytes)		
4/8/2008 9:05 AM			
c:\windows\system32\msaud32.acm	Microsoft Corporation	Windows Media Audio Codec OK	
C:\WINDOWS\system32\MSAUD32.ACM			
8.00.00.4487	288.00 KB (294,912 bytes)		
11/30/2005 6:00 AM			
c:\windows\system32\sl_anet.acm	Sipro Lab Telecom Inc.	Sipro Lab Telecom Audio Codec OK	
C:\WINDOWS\system32\SL_ANET.ACM			

3.02	84.00 KB (86,016 bytes)
11/30/2005 6:00 AM	
c:\windows\system32\l3codeca.acm	Fraunhofer Institut Integrierte Schaltungen IIS
IIS MPEG Layer-3 Codec	OK
C:\WINDOWS\system32\L3CODECA.ACM	1, 9, 0, 0305
284.00 KB (290,816 bytes)	
11/30/2005 6:00 AM	

[Video Codecs]

CODEC	Manufacturer	Description	
Status	File	Version	Size
c:\windows\system32\msh263.drv	Microsoft Corporation	OK	
C:\WINDOWS\system32\MSH263.DRV			
5.2.3790.3959	288.00 KB (294,912 bytes)		
3/24/2005 1:07 PM			
c:\windows\system32\msvidc32.dll	Microsoft Corporation	OK	
C:\WINDOWS\system32\MSVIDC32.DLL			
5.2.3790.0 (srv03_rtm.030324-2048)			
26.50 KB (27,136 bytes)		11/30/2005 6:00 AM	
c:\windows\system32\tsbyuv.dll	Microsoft Corporation	OK	
C:\WINDOWS\system32\TSBYUV.DLL			
5.2.3790.0 (srv03_rtm.030324-2048)			
8.00 KB (8,192 bytes)		3/24/2003 8:50 PM	
c:\windows\system32\msrle32.dll	Microsoft Corporation	OK	
C:\WINDOWS\system32\MSRLE32.DLL			
5.2.3790.0 (srv03_rtm.030324-2048)			
10.50 KB (10,752 bytes)		11/30/2005 6:00 AM	
c:\windows\system32\msyuv.dll	Microsoft Corporation	OK	
C:\WINDOWS\system32\MSYUV.DLL			
(srv03_rtm.030324-2048)			
16.50 KB (16,896 bytes)		3/24/2003 8:49 PM	
c:\windows\system32\iyuv_32.dll	Microsoft Corporation	OK	
C:\WINDOWS\system32\IYUV_32.DLL			
5.2.3790.3959 (srv03_sp2_rtm.070216-1710)			
46.50 KB (47,616 bytes)		3/24/2005 1:05 PM	
c:\windows\system32\msh261.drv	Microsoft Corporation	OK	
C:\WINDOWS\system32\MSH261.DRV			
5.2.3790.3959	184.00 KB (188,416 bytes)		
8/7/2007 2:52 PM			

[CD-ROM]

Item	Value
------	-------

[Sound Device]

Item	Value
------	-------

[Display]

Item	Value
Name	ATI ES1000
PNP Device ID	PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_02\4&2014205D&0x18F0
Adapter Type	ATI ES1000 (0x515E), ATI Technologies Inc. compatible
Adapter Description	ATI ES1000
Adapter RAM	32.00 MB (33,554,432 bytes)
Installed Drivers	ati2dvg.dll
Driver Version	6.14.10.6606
INF File	oem1.inf (ati2mtag_RN50 section)
Color Planes	1
Color Table Entries	4294967296
Resolution	1024 x 768 x 60 hertz
Bits/Pixel	32
Memory Address	0xD8000000-0xFFFFFFFF
I/O Port	0x00003000-0x000030FF
Memory Address	0xF7F0000-0xF7FFFFFF
IRQ Channel	IRQ 23
I/O Port	0x00003B0-0x00003BB
I/O Port	0x00003C0-0x00003DF
Memory Address	0xA0000-0xBFFF
Driver	c:\windows\system32\drivers\ati2mtag.sys (6.14.10.6606, 1.36 MB (1,431,040 bytes), 8/13/2007 1:53 PM)

[Infrared]

Item	Value
------	-------

[Input]

[Keyboard]

Item	Value
Description	USB Human Interface Device
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00
Number of Function Keys	12
Driver	c:\windows\system32\drivers\hidusb.sys (5.2.3790.0 (srv03_rtm.030324-2048), 11.50 KB (11,776 bytes), 11/30/2005 6:00 AM)
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&2AA4AD3D&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1

Driver c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 54.50 KB
(55,808 bytes), 11/30/2005 6:00 AM)

[Pointing Device]

Item	Value
Hardware Type	USB Human Interface Device
Number of Buttons	3
Status	OK
PNP Device ID	USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00001
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
Driver	c:\windows\system32\drivers\hidusb.sys (5.2.3790.0 (srv03_rtm.030324-2048), 11.50 KB (11,776 bytes), 11/30/2005 6:00 AM)

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	3
Status	Error
PNP Device ID	ACPI\PNP0F13\4&2AA4AD3D&0
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
IRQ Channel	IRQ 12
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 54.50 KB (55,808 bytes), 11/30/2005 6:00 AM)

[Modem]

Item	Value
------	-------

[Network]

[Adapter]

Item	Value
Name	[00000001] RAS Async Adapter
Adapter Type	Not Available
Product Type	RAS Async Adapter
Installed Yes	
PNP Device ID	Not Available
Last Reset	10/21/2008 8:09 AM
Index	1
Service Name	AsyncMac
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000002] WAN Miniport (L2TP)
Adapter Type	Not Available

Product Type	WAN Miniport (L2TP)
Installed Yes	
PNP Device ID	ROOT\MS_L2TPMINIPORT\0000
Last Reset	10/21/2008 8:09 AM
Index	2
Service Name	Rasl2tp
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\rasl2tp.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 64.00 KB (65,536 bytes), 11/30/2005 6:00 AM)

Name	[00000003] WAN Miniport (PPTP)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPTP)
Installed Yes	
PNP Device ID	ROOT\MS_PPTPMINIPORT\0000
Last Reset	10/21/2008 8:09 AM
Index	3
Service Name	PptpMiniport
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	50:50:54:50:30:30
Driver	c:\windows\system32\drivers\raspppt.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 58.50 KB (59,904 bytes), 11/30/2005 6:00 AM)

Name	[00000004] WAN Miniport (PPPOE)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPPOE)
Installed Yes	
PNP Device ID	ROOT\MS_PPPOEMINIPORT\0000
Last Reset	10/21/2008 8:09 AM
Index	4
Service Name	RasPppoe
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	33:50:6F:45:30:30
Driver	c:\windows\system32\drivers\raspppoe.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 40.00 KB (40,960 bytes), 11/30/2005 6:00 AM)

Name	[00000005] Direct Parallel
Adapter Type	Not Available
Product Type	Direct Parallel
Installed Yes	

PNP Device ID	ROOT\MS_PTIMINIPORT\0000
Last Reset	10/21/2008 8:09 AM
Index	5
Service Name	Raspti
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\raspti.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 19.50 KB (19,968 bytes), 11/30/2005 6:00 AM)

Name	[00000006] WAN Miniport (IP)
Adapter Type	Not Available
Product Type	WAN Miniport (IP)
Installed Yes	
PNP Device ID	ROOT\MS_NDISWANIP\0000
Last Reset	10/21/2008 8:09 AM
Index	6
Service Name	NdisWan
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\ndiswan.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 87.50 KB (89,600 bytes), 11/30/2005 6:00 AM)

Name	[00000007] HP NC373i Multifunction Gigabit Server Adapter
Adapter Type	Ethernet 802.3
Product Type	HP NC373i Multifunction Gigabit Server Adapter
Installed Yes	
PNP Device ID	B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R_EV_12\6&30C5FC0&0&20050300
Last Reset	10/21/2008 8:09 AM
Index	7
Service Name	12nd
IP Address	130.172.11.121
IP Subnet	255.255.0.0
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:21:5A:4C:29:0A
Driver	c:\windows\system32\drivers\bxnd52x.sys (4.5.4.0 built by: WinDDK, 54.50 KB (55,808 bytes), 8/10/2007 9:49 AM)
Name	[00000008] HP NC373i Multifunction Gigabit Server Adapter

Adapter Type	Ethernet 802.3
Product Type	HP NC373i Multifunction Gigabit
Server Adapter	
Installed Yes	
PNP Device ID	B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&29511DBC&0&20050500	
Last Reset	10/21/2008 8:09 AM
Index	8
Service Name	12nd
IP Address	130.168.40.121, 130.121.208.121
IP Subnet	255.255.0.0, 255.255.0.0
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:21:5A:4C:29:0E
Driver	c:\windows\system32\drivers\bxnd52x.sys (4.5.4.0 built by: WinDDK, 54.50 KB (55,808 bytes), 8/10/2007 9:49 AM)
[Protocol]	
Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes
Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD NetBIOS [\Device\NetBT_Tcpip_{337E4A0F-1A8B-4B0D-8AB9-98DB7B9EC7AB}] SEQPACKET 3
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD NetBIOS [\Device\NetBT_Tcpip_{337E4A0F-1A8B-4B0D-8AB9-98DB7B9EC7AB}] DATAGRAM 3

Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD NetBIOS [\Device\NetBT_Tcpip_{8DB86463-9958-424F-A4C2-FB3B07FD6B39}] SEQPACKET 0
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD NetBIOS [\Device\NetBT_Tcpip_{8DB86463-9958-424F-A4C2-FB3B07FD6B39}] DATAGRAM 0
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD NetBIOS [\Device\NetBT_Tcpip_{337E4A0F-1A8B-4B0D-8AB9-98DB7B9EC7AB}] DATAGRAM 0

Name	MSAFD NetBIOS
[\\Device\\NetBT_Tcpip_{9F95CA4D-45AE-4E2B-8D26-D0A991E9DD9}]	SEQPACKET 1
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD NetBIOS
[\\Device\\NetBT_Tcpip_{9F95CA4D-45AE-4E2B-8D26-D0A991E9DD9}]	DATAGRAM 1
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD NetBIOS
[\\Device\\NetBT_Tcpip_{D746FA27-DFC0-4D82-B5DF-26123541D6A3}]	SEQPACKET 2
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
[\\Device\\NetBT_Tcpip_{D746FA27-DFC0-4D82-B5DF-26123541D6A3}]	DATAGRAM 2
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
[WinSock]	
Item	Value
File	c:\\windows\\system32\\winsock.dll
Size	2.80 KB (2,864 bytes)
Version	3.10
File	c:\\windows\\system32\\wsock32.dll
Size	22.00 KB (22,528 bytes)
Version	5.2.3790.0 (srv03_rtm.030324-2048)
[Ports]	
[Serial]	
Item	Value
Name	Communications Port (COM2)
Status	OK
PNP Device ID	ROOT*PNP0501\\1_0_17_1_0_0
Maximum Input Buffer Size	0
Maximum Output Buffer Size	No
Settable Baud Rate	Yes
Settable Data Bits	Yes
Settable Flow Control	Yes
Settable Parity	Yes
Settable Parity Check	Yes
Settable Stop Bits	Yes
Settable RLS	Yes
Supports RLS	Yes
Supports 16 Bit Mode	No
Supports Special Characters	No
Baud Rate	9600
Bits/Byte	8
Stop Bits	1
Parity	None
Busy	No
Abort Read/Write on Error	No
Binary Mode Enabled	Yes
Continue XMit on XOff	No
CTS Outflow Control	No
DSR Outflow Control	0
DSR Sensitivity	0
DTR Flow Control Type	Enable
EOF Character	0
Error Replace Character	0
Error Replacement Enabled	No
Event Character	0
Parity Check Enabled	No
RTS Flow Control Type	Enable
XOff Character	19
XOffXmit Threshold	512
XOn Character	17
XOnXmit Threshold	2048
Driver	c:\\windows\\system32\\drivers\\serial.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 64.00 KB (65,536 bytes), 11/30/2005 6:00 AM)

Continue XMit on XOff	No
CTS Outflow Control	No
Discard NULL Bytes	No
DSR Outflow Control	0
DSR Sensitivity	0
DTR Flow Control Type	Enable
EOF Character	0
Error Replace Character	0
Error Replacement Enabled	No
Event Character	0
Parity Check Enabled	No
RTS Flow Control Type	Enable
XOff Character	19
XOffXmit Threshold	512
XOn Character	17
XOnXmit Threshold	2048

```

XOnOff InFlow Control      0
XOnOff OutFlow Control     0
IRQ Channel          IRQ 4
I/O Port   0x000003F8-0x000003FF
Driver    c:\windows\system32\drivers\serial.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 64.00 KB
(65,536 bytes), 11/30/2005 6:00 AM)

```

[Parallel]

Item	Value
------	-------

[Storage]

[Drives]

Item	Value
Drive C:	Local Fixed Disk
Compressed	No
File System	NTFS
Size	33.88 GB (36,381,306,880 bytes)
Free Space	24.04 GB (25,811,660,800 bytes)

Volume Name	
Volume Serial Number	8C06AC55

[Disks]

Item	Value
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 2	
SCSI Target ID	4
Sectors/Track	32
Size	33.88 GB (36,385,505,280 bytes)
Total Cylinders	8,709
Total Sectors	71,065,440
Total Tracks	2,220,795
Tracks/Cylinder	255
Partition Disk #0, Partition #0	
Partition Size	33.88 GB (36,381,310,976 bytes)
Partition Starting Offset	16,384 bytes

[SCSI]

Item	Value
Name	Smart Array P400I Controller
Manufacturer	Hewlett-Packard Company
Status	OK

```

PNP Device ID           PCI\VEN_103C&DEV_3230&SUBSYS_3235103C&REV_0
3\4&EFC3E79&0x0018
Memory Address        0xFDE00000-0xFDEFFFFF
I/O Port   0x00004000-0x00004FFF
Memory Address        0xFDDFO000-0xFDDFOFFF
IRQ Channel          IRQ 16
Driver    c:\windows\system32\drivers\hpcisss2.sys
(6.6.0.32 Build 5 (x86) built by: buildsrv, 53.30 KB
(54,584 bytes), 12/31/1979 6:00 PM)

```

[IDE]

Item	Value
Name	Standard Dual Channel PCI IDE Controller
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0 9\3&61AA01&0xE9 I/O Port 0x00000500-0x0000050F Driver c:\windows\system32\drivers\pciide.sys (5.2.3790.0 (srv03_rtm.030324-2048), 5.50 KB (5,632 bytes), 11/30/2005 6:00 AM)

Name	Primary IDE Channel
------	---------------------

Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCIIDE\IDECHANNEL\4&56E2F28&0&0

I/O Port	0x000001F0-0x000001F7
I/O Port	0x000003F6-0x000003F6
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 94.50 KB (96,768 bytes), 11/30/2005 6:00 AM)

Name	Secondary IDE Channel
------	-----------------------

Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCIIDE\IDECHANNEL\4&56E2F28&0&1

I/O Port	0x00000170-0x00000177
I/O Port	0x00000376-0x00000376
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 94.50 KB (96,768 bytes), 11/30/2005 6:00 AM)

[Printing]

Name	Driver	Port Name	Server Name
------	--------	-----------	-------------

[Problem Devices]

Device	PNP Device ID	Error Code
	Standard 101/102-Key or Microsoft Natural PS/2	
Keyboard	ACPI\PNP0303\4&2AA4AD3D&0	This device is not present, is not working properly, or does not have all its drivers installed.

PS/2 Compatible Mouse

ACPI\PNP0F13\4&2AA4AD3D&0	This device is not present, is not working properly, or does not have all its drivers installed.
---------------------------	--

[USB]

Device	PNP Device ID
Standard Universal PCI to USB Host Controller	PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0 9\3&61AA01&0xE8 Standard Universal PCI to USB Host Controller PCI\VEN_8086&DEV_2689&SUBSYS_31FE103C&REV_0 9\3&61AA01&0xE9 Standard Universal PCI to USB Host Controller PCI\VEN_8086&DEV_268A&SUBSYS_31FE103C&REV_0 9\3&61AA01&0xEA Standard Universal PCI to USB Host Controller PCI\VEN_8086&DEV_268B&SUBSYS_31FE103C&REV_0 9\3&61AA01&0xEB Standard Enhanced PCI to USB Host Controller PCI\VEN_8086&DEV_268C&SUBSYS_31FE103C&REV_0 9\3&61AA01&0xEF Standard Universal PCI to USB Host Controller PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0 0\4&2014205D&0&24F0

[Software Environment]

[System Drivers]

Name	Description	File	Type		
	Started	Start Mode	State		
	Status	Error Control	Accept Pause		
	Accept Stop				
abiosdsk	Abiosdsk	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys			
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
acpied	ACPIEC	c:\windows\system32\drivers\acpied.sys			
	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No
adpu160m	adpu160m	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
adpu320	adpu320	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
afcnt	afcnt	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	
afd	AFD	c:\windows\system32\drivers\afd.sys			
	Kernel Driver	Yes	System		

		Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes
aic78u2	aic78u2	Not Available No Normal	Disabled No No	Stopped Stopped	Kernel Driver OK	Kernel Driver OK	cbidf2k	cbidf2k c:\windows\system32\drivers\cbidf2k.sys	Kernel Driver No Normal	Normal No Normal	No No No	Yes	disk	Disk Driver c:\windows\system32\drivers\disk.sys	Kernel Driver Yes Normal	Normal No	Yes	
aic78xx	aic78xx	Not Available No Normal	Disabled No No	Stopped Stopped	Kernel Driver OK	Kernel Driver OK	cd20xrnt	cd20xrnt c:\windows\system32\drivers\cd20xrnt.sys	Not Available No Normal	Kernel Driver Normal No	Normal No Normal	No No No	dmboot	dmboot c:\windows\system32\drivers\dmboot.sys	Kernel Driver No Normal	Disabled Normal	No	
aliide	AliIde	Not Available No Normal	Disabled No No	Stopped Stopped	Kernel Driver OK	Kernel Driver OK	cdfs	Cdfs c:\windows\system32\drivers\cdfs.sys	File System Driver No Normal	Normal No Normal	Disabled No No	No No No	dmio	Logical Disk Manager Driver c:\windows\system32\drivers\dmio.sys	Kernel Driver Yes Normal	Boot Normal	Yes	
alkernel	Altiris Kernel Driver c:\windows\system32\drivers\alkernel.sys	Kernel Driver Yes Running	Manual OK	Normal Normal	No No	Yes Yes	cdrom	CD-ROM Driver c:\windows\system32\drivers\cdrom.sys	Kernel Driver No Normal	System Normal	No No	No No	dmload	dmload c:\windows\system32\drivers\dmload.sys	Kernel Driver Yes Normal	Boot Normal	Yes	
amdide	AmdIde c:\windows\system32\drivers\amdide.sys	Kernel Driver No Stopped	Disabled OK	Normal Normal	No No	No	changer	Changer No Ignore	Not Available System No	Kernel Driver Normal Stopped	Normal No OK	Yes	dpti2o	dpti2o c:\windows\system32\drivers\dpti2o.sys	Kernel Driver No Normal	Normal No	OK	
arc	arc c:\windows\system32\drivers\arc.sys	Kernel Driver No Stopped	Disabled OK	Normal Normal	No No	No	clusdisk	Cluster Disk Driver c:\windows\system32\drivers\clusdisk.sys	Kernel Driver No Normal	Normal Normal	Disabled No No	No No No	elxstor	elxstor c:\windows\system32\drivers\elxstor.sys	Kernel Driver No Normal	Normal No	OK	
asyncmac	RAS Asynchronous Media Driver c:\windows\system32\drivers\asyncmac.sys	Kernel Driver No Stopped	Manual OK	Normal Normal	No No	No	cmdide	Cmddide No Normal	Not Available Disabled No	Kernel Driver Normal Normal	Normal No No	fastfat	Fastfat c:\windows\system32\drivers\fastfat.sys	File System Driver No Normal	Normal No	No		
atapi	Standard IDE/ESDI Hard Disk Controller c:\windows\system32\drivers\atapi.sys	Kernel Driver Yes Running	Boot OK	Normal Normal	No No	Yes	cpqarray	Cpqarray No Normal	Not Available Disabled No	Kernel Driver Normal Normal	Normal No No	fdc	Fdc c:\windows\system32\drivers\fdc.sys	Kernel Driver No Normal	System Ignore	No		
atdisk	Atdisk No Ignore	Not Available Disabled No	Kernel Driver Stopped	Normal Normal	No No	OK	cpqarry2	Cpqarry2 No Normal	Not Available Disabled No	Kernel Driver Normal Normal	Normal No No	fips	Fips c:\windows\system32\drivers\fips.sys	Kernel Driver Yes Normal	System Normal	No		
ati2mtag	ati2mtag c:\windows\system32\drivers\ati2mtag.sys	Kernel Driver Yes Running	Manual OK	Normal Ignore	No No	Yes	cpqcdrv	HP iLO Management Channel Interface Driver c:\windows\system32\drivers\cpqcdrv.sys	Kernel Driver Yes Normal	Normal Normal	Manual No No	No Yes	flpydisk	Flpydisk c:\windows\system32\drivers\flpydisk.sys	Kernel Driver No Normal	System Ignore	No	
atmarpc	ATM ARP Client Protocol c:\windows\system32\drivers\atmarpc.sys	Kernel Driver No Stopped	Manual OK	Normal Normal	No No	No	cpqcissm	Cpqcissm No Normal	Not Available Disabled No	Kernel Driver Normal Normal	Normal No No	fltmgr	FltMgr c:\windows\system32\drivers\fltmgr.sys	File System Driver Yes Normal	Boot Normal	Yes		
audstub	Audio Stub Driver c:\windows\system32\drivers\audstub.sys	Kernel Driver Yes Running	Manual OK	Normal Normal	No No	Yes	crcdisk	Crc Disk Filter Driver c:\windows\system32\drivers\crcdisk.sys	Kernel Driver Yes Normal	Normal Normal	No No	Yes	ftdisk	Volume Manager Driver c:\windows\system32\drivers\ftdisk.sys	Kernel Driver Yes Normal	Boot Normal	Yes	
b06bdrv	HP Virtual Bus Device c:\windows\system32\drivers\bxvwdx.sys	Kernel Driver Yes Running	Boot OK	Normal Normal	No No	Yes	dac960nt	dac960nt No Normal	Not Available Disabled No	Kernel Driver Normal Normal	Normal No No	gpc	Generic Packet Classifier c:\windows\system32\drivers\msgpc.sys	Kernel Driver Yes Normal	Manual	Yes		
beep	Beep c:\windows\system32\drivers\beep.sys	Kernel Driver Yes	System				dellerc	dellerc No Normal	Not Available Disabled No	Kernel Driver Normal Normal	Normal No No							
							dfsdriver	DfsDriver c:\windows\system32\drivers\dfs.sys	File System Driver Yes	Normal	No							

		Running	OK	Normal	No	Yes			Kernel Driver Stopped	Normal	Manual	No	No			Running	OK	Ignore	No	Yes	
hidusb	Microsoft HID Class Driver c:\windows\system32\drivers\hidusb.sys	Kernel Driver Running	Yes OK	Normal Ignore	No	Yes		ipfilterdriver	IP Traffic Filter Driver c:\windows\system32\drivers\ipfltdrv.sys	Kernel Driver Stopped	Normal	Manual	No	No		modem	Modem c:\windows\system32\drivers\modem.sys	Kernel Driver Stopped	No OK	Manual Ignore	Yes No
hpcisss	hpcisss c:\windows\system32\drivers\hpcisss.sys	Kernel Driver Stopped	No OK	Disabled Normal	No	No		ipinip	IP in IP Tunnel Driver c:\windows\system32\drivers\ipinip.sys	Kernel Driver Stopped	Normal	Manual	No	No		mouclass	Mouse Class Driver c:\windows\system32\drivers\mouclass.sys	Kernel Driver Running	Yes OK	System Normal	No Yes
hpcisss2	HpCISs2 c:\windows\system32\drivers\hpcisss2.sys	Kernel Driver Running	Yes OK	Boot Normal	No	Yes		ipnat	IP Network Address Translator c:\windows\system32\drivers\ipnat.sys	Kernel Driver Stopped	Normal	Manual	No	No		mouhid	Mouse HID Driver c:\windows\system32\drivers\mouhid.sys	Kernel Driver Running	Yes OK	Manual Ignore	Yes No
hpn	hpn Not Available	Kernel Driver No	Kernel Disabled	Stopped Normal	OK No	OK		ipsec	IPSEC driver c:\windows\system32\drivers\ipsec.sys	Kernel Driver Running	Yes OK	System Normal	No	Yes		mountmgr	Mount Point Manager c:\windows\system32\drivers\mountmgr.sys	Kernel Driver Running	Yes OK	Boot Normal	Yes No
hpqilo2	hpqilo2 c:\windows\system32\drivers\hpqilo2.sys	Kernel Driver Running	Yes OK	Manual Normal	No	Yes		ipsraiden	ipsraiden Not Available	Kernel Driver No	Kernel Disabled	Driver Stopped	OK Normal	No		mraid35x	mraid35x Not Available	Kernel Driver No	Kernel Disabled	Driver Stopped	OK Normal
hpt3xx	hpt3xx Not Available	Kernel Driver No	Kernel Disabled	Stopped Normal	OK No	OK		irenum	IR Enumerator Service c:\windows\system32\drivers\irenum.sys	Kernel Driver Stopped	No OK	Manual Normal	No	No		mrxdav	WebDav Client Redirector c:\windows\system32\drivers\mrxdav.sys	File System Driver Stopped	No OK	Manual Normal	Yes No
http	HTTP c:\windows\system32\drivers\http.sys	Kernel Driver Running	Yes OK	Manual Normal	No	Yes		isapnp	PnP ISA/EISA Bus Driver c:\windows\system32\drivers\isapnp.sys	Kernel Driver Running	Yes OK	Boot Critical	No	Yes		mrxsmb	MRXSMB c:\windows\system32\drivers\mrxsmb.sys	File System Driver Running	Yes OK	System Normal	No Yes
i2omgmt	i2omgmt Not Available	Kernel Driver No	Kernel System	Stopped Normal	OK No	OK		kbdclass	Keyboard Class Driver c:\windows\system32\drivers\kbdclass.sys	Kernel Driver Running	Yes OK	System Normal	No	Yes		msfs	Msfs c:\windows\system32\drivers\msfs.sys	File System Driver Running	Yes OK	System Normal	No Yes
i2omp	i2omp Not Available	Kernel Driver No	Kernel Disabled	Stopped Normal	OK No	OK		kbddhid	Keyboard HID Driver c:\windows\system32\drivers\kbddhid.sys	Kernel Driver Running	Yes OK	System Normal	No	Yes		mssmbios	Microsoft System Management BIOS Driver c:\windows\system32\drivers\mssmbios.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver c:\windows\system32\drivers\i8042prt.sys	Kernel Driver Running	Yes OK	System Normal	No	Yes		ksecd2	KSecDD c:\windows\system32\drivers\ksecd2.sys	Kernel Driver Running	Yes OK	Boot Normal	No	Yes		mup	Mup c:\windows\system32\drivers\mup.sys	File System Driver Running	Yes OK	Boot Normal	Yes No
iirsp	iirsp Not Available	Kernel Driver No	Kernel Disabled	Stopped Normal	OK No	OK		lp6nds35	lp6nds35 Not Available	Kernel Driver No	Kernel Disabled	Driver Stopped	OK Normal	No		ndis	NDIS System Driver c:\windows\system32\drivers\ndis.sys	Kernel Driver Running	Yes OK	Boot Normal	Yes No
imapi	CD-Burning Filter Driver c:\windows\system32\drivers\imapi.sys	Kernel Driver Stopped	No OK	System Normal	No	No		mnmd2	mnmd2 c:\windows\system32\drivers\mnmd2.sys	Kernel Driver Running	Yes OK	Manual Normal	No	Yes		ndistapi	Remote Access NDIS TAPI Driver c:\windows\system32\drivers\ndistapi.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No
intelide	IntelIDE Not Available	Kernel Driver No	Kernel Disabled	Stopped Normal	OK No	OK		12nd Adapter	HP NC370 Multifunction Gigabit Server c:\windows\system32\drivers\bxnd52x.sys	Kernel Driver Running	Yes OK	Manual Normal	No	Yes		ndisui0	NDIS Usermode I/O Protocol c:\windows\system32\drivers\ndisui0.sys	Kernel Driver Running	Yes OK	System Normal	Yes No
intelpmm	Intel Processor Driver c:\windows\system32\drivers\intelpmm.sys	Kernel Driver Running	Yes OK	Manual Normal	No	Yes															
ip6fw	IPv6 Windows Firewall Driver c:\windows\system32\drivers\ip6fw.sys																				

	Kernel Driver Stopped OK	No Normal	Manual No	No	pcmcia	Pcmcia c:\windows\system32\drivers\pcmcia.sys	Kernel Driver Stopped OK	No Normal	Disabled No	No	rasl2tp	WAN Miniport (L2TP) c:\windows\system32\drivers\rasl2tp.sys
ndiswan	Remote Access NDIS WAN Driver c:\windows\system32\drivers\ndiswan.sys	Kernel Driver Running OK	Yes Normal	Manual No	pdcomp	PDCOMP No Ignore	Not Available No No	Kernel Driver Stopped OK	Yes No	Manual No	rasppoe	Remote Access PPPOE Driver c:\windows\system32\drivers\rasppoe.sys
ndproxy	NDIS Proxy c:\windows\system32\drivers\ndproxy.sys	Kernel Driver Running OK	Yes Normal	Manual No	pdframe	PDFRAME No Ignore	Not Available No No	Kernel Driver Stopped OK	Yes No	Manual No	raspti	Direct Parallel c:\windows\system32\drivers\raspti.sys
netbios	NetBIOS Interface c:\windows\system32\drivers\netbios.sys	File System Driver Running OK	Yes Normal	System No	pdreli	PDRFLI No Ignore	Not Available No No	Kernel Driver Stopped OK	Yes No	Manual No	rdbs	Rdbss c:\windows\system32\drivers\rdbs.sys
netbt	NetBios over Tcpip c:\windows\system32\drivers\netbt.sys	Kernel Driver Running OK	Yes Normal	System No	pdrframe	PDRFRAME No Ignore	Not Available No No	Kernel Driver Stopped OK	Yes No	System No	rdpcdd	RDP CDD c:\windows\system32\drivers\rdpcdd.sys
nfrd960	nfrd960 Not Available No Normal	Kernel Driver Disabled No	Kernel Driver Yes Normal	Kernel Driver System No	perc2	perc2 No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	Manual No	rdpdr	Terminal Server Device Redirector Driver c:\windows\system32\drivers\rdpdr.sys
npfs	Npfs c:\windows\system32\drivers\npfs.sys	File System Driver Running OK	Yes Normal	System No	perc2hib	perc2hib No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	System No	rdpwd	RDPWD c:\windows\system32\drivers\rdpwd.sys
ntfs	Ntfs c:\windows\system32\drivers\ntfs.sys	File System Driver Running OK	Yes Normal	Disabled No	pptpminiport	PPTP Miniport (PPTP) c:\windows\system32\drivers\raspppt.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes	redbook	Digital CD Audio Playback Filter Driver c:\windows\system32\drivers\redbook.sys
null	Null c:\windows\system32\drivers\null.sys	Kernel Driver Running OK	Yes Normal	System No	ptilink	PTILINK c:\windows\system32\drivers\ptilink.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes	secdrv	Secdrv c:\windows\system32\drivers\secdrv.sys
parport	Parport c:\windows\system32\drivers\parport.sys	Kernel Driver Stopped OK	No Ignore	Manual No	ql1080	ql1080 No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	Manual No	serenum	Serenum Filter Driver c:\windows\system32\drivers\serenum.sys
partmgr	Partition Manager c:\windows\system32\drivers\partmgr.sys	Kernel Driver Running OK	Yes Normal	Boot No	ql10wnt	ql10wnt No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	Manual No	serial	Serial port driver c:\windows\system32\drivers\serial.sys
pci	PCI Bus Driver c:\windows\system32\drivers\pci.sys	Kernel Driver Running OK	Yes Critical	Boot No	ql12160	ql12160 No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	Manual No	sfloppy	Sfloppy c:\windows\system32\drivers\sfloppy.sys
pcide	PCI IDE c:\windows\system32\drivers\pcide.sys	Kernel Driver Running OK	Yes Normal	Boot No	ql1240	ql1240 No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	System No		
					ql1280	ql1280 No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	System No		
					ql2100	ql2100 No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	System No		
					ql2200	ql2200 No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	System No		
					ql2300	ql2300 No Normal	Not Available No No	Kernel Driver Stopped OK	Yes No	System No		
					rasacd	RASACD c:\windows\system32\drivers\rasacd.sys	Kernel Driver Running OK	Yes Normal	System No	Yes		

simbad	Simbad	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
srv	Srv	c:\windows\system32\drivers\srv.sys	
	File System Driver	Yes	Manual
	Running	OK	Normal No Yes
startdss	HP ProLiant Virtual Install Disk Support		
Driver	c:\windows\system32\drivers\startdss.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
swenum	Software Bus Driver		
	c:\windows\system32\drivers\swenum.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
symc810	symc810	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
symc8xx	symc8xx	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
sympmi	sympmi	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
sym_hi	sym_hi	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
sym_u3	sym_u3	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
tcpip	TCP/IP Protocol Driver		
	c:\windows\system32\drivers\tcpip.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
tdpipe	TDPIPE		
	c:\windows\system32\drivers\tdpipe.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Ignore No No
tdtcp	TDTCP		
	c:\windows\system32\drivers\tdtcp.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Ignore No Yes
termdd	Terminal Device Driver		
	c:\windows\system32\drivers\termdd.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
toside	TosIde	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
udfs	Udfs	c:\windows\system32\drivers\udfs.sys	
	File System Driver	No	Disabled
	Stopped	OK	Normal No No
ultra	ultra	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
update	Microcode Update Driver		
	c:\windows\system32\drivers\update.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
usbccgp	Microsoft USB Generic Parent Driver		
	c:\windows\system32\drivers\usbccgp.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
usbehci	Microsoft USB 2.0 Enhanced Host Controller		
Miniport	Driver		
	c:\windows\system32\drivers\usbehci.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
usbhub	Microsoft USB Standard Hub Driver		
	c:\windows\system32\drivers\usbhub.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
usbstor	USB Mass Storage Driver		
	c:\windows\system32\drivers\usbstor.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
usbuhci	Microsoft USB Universal Host Controller		
Miniport	Driver		
	c:\windows\system32\drivers\usbuhci.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
vga	vga		
	c:\windows\system32\drivers\vgapnp.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Ignore No No
vgasave	VGA Display Controller.		
	c:\windows\system32\drivers\vga.sys		
	Kernel Driver	Yes	System
	Running	OK	Ignore No Yes
viaide	ViaIde	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	
volsnap	Storage volumes		
	c:\windows\system32\drivers\volsnap.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
wanarp	Remote Access IP ARP Driver		
	c:\windows\system32\drivers\wanarp.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
wdf01000	Wdf01000		
	c:\windows\system32\drivers\wdf01000.sys		
	Kernel Driver	Yes	Boot
wdica	WDICA	Not Available	Kernel Driver
	No	Manual	Stopped OK
	Ignore	No	No
wlbs	Network Load Balancing		
	c:\windows\system32\drivers\wlbs.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
[Signed Drivers]			
Device Name Signed Device Class			
Driver Version Driver Date			
Manufacturer INF Name Driver Name			
Device ID			
Communications Port Yes PORTS 5.2.3790.0			
10/1/2002 (Standard port types)			
msports.inf Not Available			
ROOT*PNP0501\1_0_17_1_0_0			
Microsoft System Management BIOS Driver Yes			
SYSTEM 5.2.3790.1830 10/1/2002			
(Standard system devices) machine.inf			
Not Available ROOT\SYSTEM\0002			
Microcode Update Device Yes SYSTEM			
5.2.3790.1830 10/1/2002 (Standard			
system devices) machine.inf Not Available			
ROOT\SYSTEM\0001			
Plug and Play Software Device Enumerator Yes			
SYSTEM 5.2.3790.1830 10/1/2002			
(Standard system devices) machine.inf			
Not Available ROOT\SYSTEM\0000			
Terminal Server Mouse Driver Yes SYSTEM			
5.2.3790.1830 10/1/2002 (Standard			
system devices) machine.inf Not Available			
ROOT\RDP_MOU\0000			
Terminal Server Keyboard Driver Yes			
SYSTEM 5.2.3790.1830 10/1/2002			
(Standard system devices) machine.inf			
Not Available ROOT\RDP_KBD\0000			
Terminal Server Device Redirector Yes			
SYSTEM 5.2.3790.1830 10/1/2002			
(Standard system devices) machine.inf			
Not Available ROOT\RDPDR\0000			
Direct Parallel Yes NET 5.2.3790.1830			
10/1/2002 Microsoft netrasa.inf Not			
Available ROOT\MS_PTMINIPORT\0000			
WAN Miniport (PTP) Yes NET 5.2.3790.1830			
10/1/2002 Microsoft netrasa.inf Not			
Available ROOT\MS_PPTPMINIPORT\0000			
WAN Miniport (PPPOE) Yes NET			
5.2.3790.1830 10/1/2002 Microsoft			
netrasa.inf Not Available			
ROOT\MS_PPPOEMINIPORT\0000			
WAN Miniport (IP) Yes NET 5.2.3790.1830			
10/1/2002 Microsoft netrasa.inf Not			
Available ROOT\MS_NDISWANIP\0000			
WAN Miniport (L2TP) Yes NET 5.2.3790.1830			
10/1/2002 Microsoft netrasa.inf Not			
Available ROOT\MS_L2TPMINIPORT\0000			

Video Codecs	Yes	MEDIA	5.2.3790.0		Available	Not Available	Not Available	dmboot	Not Available	LEGACYDRIVER	Not
	10/1/2002 (Standard system devices)	wave.inf	Not Available			ROOT\LEGACY_PARTMGR\0000		Available	Not Available	Not Available	Not
		ROOT\MEDIA\MS_MMVID			Null	Not Available	LEGACYDRIVER	Not	Available	Not Available	ROOT\LEGACY_DMBOOT\0000
Legacy Video Capture Devices	Yes	MEDIA	5.2.3790.0	10/1/2002 (Standard system devices)	wave.inf	Not Available	Not Available	CRC Disk Filter Driver	Not Available	LEGACYDRIVER	Not
		ROOT\MEDIA\MS_MMVCD			Available	Not Available	Not Available	LEGACYDRIVER	Not Available	Not Available	Not
Media Control Devices	Yes	MEDIA	5.2.3790.0	10/1/2002 (Standard system devices)	wave.inf	Not Available	Not Available	Available	Not Available	Not Available	Not
		ROOT\MEDIA\MS_MMCI			NDProxy	Not Available	LEGACYDRIVER	Not	Available	Not Available	ROOT\LEGACY_CRCDISK\0000
Legacy Audio Drivers	Yes	MEDIA	5.2.3790.0	10/1/2002 (Standard system devices)	wave.inf	Not Available	Not Available	Beep	Not Available	LEGACYDRIVER	Not
		ROOT\MEDIA\MS_MMDRV			Available	Not Available	Not Available	Available	Not Available	Not Available	Not
Audio Codecs	Yes	MEDIA	5.2.3790.0	10/1/2002 (Standard system devices)	wave.inf	Not Available	Not Available	Available	Not Available	ROOT\LEGACY_BEEP\0000	
		ROOT\MEDIA\MS_MMACM			Remote Access NDIS TAPI Driver	Not Available	Not Available	Altiris Kernel Driver	Not Available	LEGACYDRIVER	Not
Wdf01000	Not Available	LEGACYDRIVER	Not Available		LEGACYDRIVER	Not Available	Not	Available	Not Available	Not Available	Not
		Available	Not Available		Available	Not Available	Not Available	Available	Not Available	Not Available	Not
		Available	Not Available	ROOT\LEGACY_WDF01000\0000	NDIS Usermode I/O Protocol	Not Available	Not Available	AFD	Not Available	LEGACYDRIVER	Not
Remote Access IP ARP Driver	Not Available	LEGACYDRIVER	Not Available		LEGACYDRIVER	Not Available	Not	Available	Not Available	Not Available	Not
		Available	Not Available	ROOT\LEGACY_WANARP\0000	Available	Not Available	Not Available	Available	Not Available	Not Available	Not
volsnap	Not Available	LEGACYDRIVER	Not Available		NDIS System Driver	Not Available	LEGACYDRIVER	Available	Not Available	ROOT\LEGACY_AFDF\0000	
		Available	Not Available	ROOT\LEGACY_VOLSNAP\0000	Not Available	Not Available	Not	Generic volume	Yes	VOLUME	5.2.3790.1830
VGA Display Controller.	Not Available	LEGACYDRIVER	Not Available		LEGACYDRIVER	Not Available	Not		10/1/2002 Microsoft	volume.inf	Not
		Available	Not Available	ROOT\LEGACY_VGASAVE\0000	Available	Not Available	Not Available	Available		STORAGE\VOLUME\1&30A96598&0&SIGNATUREC8F5C8	
TDTCP	Not Available	LEGACYDRIVER	Not Available		ROOT\LEGACY_NDIS\0000	Not Available	Not	F5OFFSET4000LENGTH8787EC000			
		Available	Not Available	ROOT\LEGACY_TDTCP\0000	mountmgr	Not Available	LEGACYDRIVER	Volume Manager	Yes	SYSTEM	5.2.3790.1830
RDPWD	Not Available	LEGACYDRIVER	Not Available		Not Available	LEGACYDRIVER	Not		10/1/2002 (Standard system devices)		
		Available	Not Available	ROOT\LEGACY_RDPWD\0000	Available	Not Available	Not Available	machine.inf	Not Available		
TCP/IP Protocol Driver	Not Available	LEGACYDRIVER	Not Available		ROOT\LEGACY_IPSEC\0000	Not Available	Not	ROOT\FTFDISK\0000			
		Available	Not Available	ROOT\LEGACY_TCPIP\0000	IPSEC driver	Not Available	LEGACYDRIVER	Logical Disk Manager	Yes	SYSTEM	
HP ProLiant Virtual Install Disk Support Driver	Not Available	LEGACYDRIVER	Not Available		Not Available	Not Available	Not	5.2.3790.1830	10/1/2002 (Standard		
		Available	Not Available	ROOT\LEGACY_STARTDSS\0000	Available	Not Available	LEGACYDRIVER	system devices)	machine.inf		
		Available	Not Available	ROOT\LEGACY_RDPWD\0000	IP Network Address Translator	Not Available	Not	ROOT\DMIO\0000	Not Available		
RDPCDD	Not Available	LEGACYDRIVER	Not Available		LEGACYDRIVER	Not Available	Not	ACPI Fixed Feature Button	Yes	SYSTEM	
		Available	Not Available	ROOT\LEGACY_RDPWD\0000	Not Available	Not Available	Not	5.2.3790.1830	10/1/2002 (Standard		
Remote Access Auto Connection Driver	Not Available	LEGACYDRIVER	Not Available		ROOT\LEGACY_IPNAT\0000	Not Available	Not	system devices)	machine.inf		
		Available	Not Available	ROOT\LEGACY_RASACD\0000	HTTP	Not Available	LEGACYDRIVER	ACPI\FIXEDBUTTON\2&DAB3FF&0	Not Available		
Partition Manager	Not Available	LEGACYDRIVER	Not Available		Not Available	Not Available	Not	ACPI Thermal Zone	Yes	SYSTEM	5.2.3790.1830
		Not Available	Not Available	ROOT\LEGACY_RDPWD\0000	Available	Not Available	ROOT\LEGACY_HTTP\0000	10/1/2002 (Standard system devices)	Not Available		
					Generic Packet Classifier	Not Available	LEGACYDRIVER	machine.inf	Not Available		
					LEGACYDRIVER	Not Available	Not	ACPI\THERMALZONE\THMO			
					Available	Not Available	Not Available	Secondary IDE Channel	Yes	HDC	
					Available	Not Available	Not Available	5.2.3790.1830	10/1/2002 (Standard IDE		
					Available	Not Available	Not Available	ATA\ATAPI controllers)	mshdc.inf	Not Available	
					Available	Not Available	Not Available	PCIIDE\IDECHANNEL\4&56E2F28&0&1			
					Available	Not Available	Not Available	Primary IDE Channel	Yes	HDC	5.2.3790.1830
					Available	Not Available	Not Available	10/1/2002 (Standard IDE ATA\ATAPI	mshdc.inf	Not Available	
					Available	Not Available	Not Available	controllers)			
					Available	Not Available	Not Available	PCIIDE\IDECHANNEL\4&56E2F28&0&0			
					Available	Not Available	Not Available	Standard Dual Channel PCI IDE Controller	Yes		
					Available	Not Available	LEGACYDRIVER	HDC	5.2.3790.1830	10/1/2002	
					Available	Not Available	Not Available	(Standard IDE ATA\ATAPI controllers)			
					Available	Not Available	Not Available	mshdc.inf	Not Available		
					Available	Not Available	Not Available	PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0			
					Available	Not Available	Not Available	9\3&61AAA01&0&F9			
					dmload	Not Available	LEGACYDRIVER	Communications Port	Yes	PORTS	5.2.3790.0
					Available	Not Available	Not Available	10/1/2002 (Standard port types)			
					Available	Not Available	Not Available	msports.inf	Not Available		
					Available	Not Available	Not Available	ACPI\PNP0501\0			
					Available	Not Available	Not Available	Extended IO Bus	Yes	SYSTEM	5.2.3790.1830
					Available	Not Available	ROOT\LEGACY_DMLOAD\0000	10/1/2002 (Standard system devices)			

PS/2 Compatible Mouse	Yes	MOUSE	USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&0001	Standard Enhanced PCI to USB Host Controller	Yes
			5.2.3790.1830 10/1/2002 Microsoft	USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	
msmouse.inf	Not Available		keyboard.inf Not Available	usbport.inf Not Available	
ACPI\PNP0F13\4&2AA4AD3D&0			HID\VID_03F0&PID_1027&MI_00\8&DED77A1&0&0000	PCI\VEN_8086&DEV_268C&SUBSYS_31FE103C&REV_0	
Standard Keyboard	Yes	KEYBOARD	USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&0000	9\3&61AAA01&0&EF	
			5.2.3790.0 10/1/2002 (Standard keyboards)	USB Root Hub Yes USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	
keybd.inf	Not Available		5.2.3790.0 10/1/2002 (Standard keyboards)	usbport.inf Not Available	
ACPI\PNP0303\4&2AA4AD3D&0			USB\ROOT_HUB\4&41C0314&0	USB\ROOT_HUB\4&41C0314&0	
System speaker	Yes	SYSTEM	USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&0000	Standard Universal PCI to USB Host Controller	Yes
			5.2.3790.1830 10/1/2002 (Standard system devices)	USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	
machine.inf	Not Available		usbport.inf Not Available	usbport.inf Not Available	
ACPI\PNP0800\4&2AA4AD3D&0			PCI\VEN_8086&DEV_268B&SUBSYS_31FE103C&REV_0	PCI\VEN_8086&DEV_268B&SUBSYS_31FE103C&REV_0	
Direct memory access controller	Yes		9\3&61AAA01&0&EB	9\3&61AAA01&0&EB	
			SYSTEM 5.2.3790.1830 10/1/2002 (Standard system devices)	USB Root Hub Yes USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	
			machine.inf Not Available	usbport.inf Not Available	
			USB\ROOT_HUB\5&26BC3420&0	USB\ROOT_HUB\4&A54F890&0	
High precision event timer	Yes	SYSTEM	Standard Universal PCI to USB Host Controller Yes	Standard Universal PCI to USB Host Controller Yes	
			5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	
system devices	machine.inf	Not Available	usbport.inf Not Available	usbport.inf Not Available	
ACPI\PNP0103\0			PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0	PCI\VEN_8086&DEV_268A&SUBSYS_31FE103C&REV_0	
System timer	Yes	SYSTEM	0\4&2014205D&0&24F0	9\3&61AAA01&0&EA	
			HP iLO Management Channel Interface Driver Yes	USB Root Hub Yes USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	
			MULTIFUNCTION 1.12.0.0 6/22/2007 Hewlett-Packard Company oem4.inf Not Available	usbport.inf Not Available	
HP NULL IPMI Controller	Yes	SYSTEM	Available PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0	USB\ROOT_HUB\4&37897620&0	
			1.0.0.0 1/1/2004 Hewlett-Packard Company oem12.inf Not Available	Standard Universal PCI to USB Host Controller Yes	
			ACPI\IP10001\0	USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	
Motherboard resources	Yes	SYSTEM	HP ProLiant iLO 2 Legacy Support Function Yes	usbport.inf Not Available	
			5.2.3790.1830 10/1/2002 (Standard SYSTEM 1.3.0.0 3/30/2007 Hewlett-Packard Company oem9.inf Not Available	PCI\VEN_8086&DEV_2689&SUBSYS_31FE103C&REV_0	
system devices	machine.inf	Not Available	PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0	9\3&61AAA01&0&E9	
ACPI\PNP0C02\0			3\4&2014205D&0&22F0	USB Root Hub Yes USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	
ISAPNP Read Data Port	Yes	SYSTEM	Default Monitor Yes MONITOR 5.1.2001.0	10/1/2002 (Standard USB Host Controller)	
			5.2.3790.1830 10/1/2002 (Standard machine.inf Not Available)	usbport.inf Not Available	
system devices	ISAPNP\READDATAPORT\0		6/6/2001 (Standard monitor types) monitor.inf Not Available	USB\ROOT_HUB\4&7353027&0	
PCI standard ISA bridge	Yes	SYSTEM	DISPLAY\DEFAULT_MONITOR\5&E64F3B&0&10000000	Standard Universal PCI to USB Host Controller Yes	
			5.2.3790.1830 10/1/2002 (Standard DISPLAY\DEFAULT_MONITOR\5&E64F3B&0&10000000	USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	
system devices	machine.inf	Not Available	&01&03 Default Monitor Yes MONITOR 5.1.2001.0	usbport.inf Not Available	
PCI\VEN_8086&DEV_2670&SUBSYS_00000000&REV_0			6/6/2001 (Standard monitor types) monitor.inf Not Available	PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0	
9\3&61AAA01&0&F8			DISPLAY\DEFAULT_MONITOR\5&E64F3B&0&10000001	9\3&61AAA01&0&E8	
HP ProLiant iLO 2 Management Controller Driver	Yes		&01&03 Default Monitor Yes MONITOR 5.1.2001.0	PCI standard host CPU bridge Yes SYSTEM	
			1.3.0.0 3/30/2007 Hewlett-Packard Company oem9.inf Not Available	5.2.3790.1830 10/1/2002 (Standard system devices)	
			PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0	PCI\VEN_8086&DEV_25F6&SUBSYS_00000000&REV_B	
0\4&2014205D&0&26F0			0\4&2014205D&0&26F0	1\3&61AAA01&0&B0	
Generic USB Hub	Yes	USB	Intel(R) 82801 PCI Bridge - 244E Yes	PCI standard host CPU bridge Yes SYSTEM	
			5.2.3790.1830 10/1/2002 (Generic USB Hub) usb.inf Not Available	5.2.3790.1830 10/1/2002 (Standard system devices)	
Available USB\VID_03F0&PID_1327\6&18FFBC52&0&2			SYSTEM 5.2.3790.3959 10/1/2002 Intel machine.inf Not Available	PCI\VEN_8086&DEV_25F6&SUBSYS_00000000&REV_B	
HID-compliant mouse	Yes	MOUSE	PCI\VEN_8086&DEV_244E&SUBSYS_00000000&REV_D	1\3&61AAA01&0&A8	
			5.2.3790.1830 10/1/2002 Microsoft msmouse.inf Not Available	PCI standard host CPU bridge Yes SYSTEM	
Available			9\3&61AAA01&0&F0	5.2.3790.1830 10/1/2002 (Standard system devices)	
			USB Root Hub Yes USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller)	PCI\VEN_8086&DEV_25F3&SUBSYS_00000000&REV_B	
HID\VID_03F0&PID_1027&MI_01\8&25B103E6&0&0000			usbport.inf Not Available	1\3&61AAA01&0&98	
USB Human Interface Device	Yes	HIDCLASS	USB\ROOT_HUB20\4&392538C3&0	PCI standard host CPU bridge Yes SYSTEM	
			5.2.3790.0 10/1/2002 (Standard input.inf Not Available)	5.2.3790.1830 10/1/2002 (Standard system devices)	

PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F1&SUBSYS_00000000&REV_B
 1\3&61AAA01&0x88

PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
 1\3&61AAA01&0x82

PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
 1\3&61AAA01&0x81

PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
 1\3&61AAA01&0x80

HP NC373i Multifunction Gigabit Server Adapter Yes
 NET 4.5.4.0 8/12/2008 Hewlett-
 Packard Company oem16.inf Not Available
 B06DRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
 EV_12\&29511DBC0&20050500

HP NC373i Virtual Bus Device Yes SYSTEM
 4.4.24.0 8/12/2008 Hewlett-Packard Company
 oem19.inf Not Available
 PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
 2\5&3687280D&0&000038

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
 3\4&8C20058&0x0038

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_25E7&SUBSYS_00000000&REV_B
 1\3&61AAA01&0x38

HP NC373i Multifunction Gigabit Server Adapter Yes
 NET 4.5.4.0 8/12/2008 Hewlett-
 Packard Company oem16.inf Not Available
 B06DRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
 EV_12\6&30C55FC0&20050300

HP NC373i Virtual Bus Device Yes SYSTEM
 4.4.24.0 8/12/2008 Hewlett-Packard Company
 oem19.inf Not Available
 PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
 2\5&20B00FFE&0&000030

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
 3\4&79C23&0&0030

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available

PCI\VEN_8086&DEV_25E6&SUBSYS_00000000&REV_B
 1\3&61AAA01&0x30

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_25E5&SUBSYS_00000000&REV_B
 1\3&61AAA01&0x28

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_25F8&SUBSYS_00000000&REV_B
 1\3&61AAA01&0x20

Disk drive Yes DISKDRIVE 5.2.3790.0
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_4.
 12\5&526D07C0&0&000400

HP Virtual LUN Yes SYSTEM 5.2.3790.3959
 10/1/2002 Compaq scsiedev.inf Not Available

Available SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
 &REV_CIS2\5&526D07C0&0&000000

Smart Array P400 Controller Yes SCSIADAPTER
 6.6.0.32 3/20/2007 Hewlett-Packard Company
 oem10.inf Not Available
 PCI\VEN_103C&DEV_3230&SUBSYS_3235103C&REV_0
 3\4&EFC3E79&0&0018

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_25E3&SUBSYS_00000000&REV_B
 1\3&61AAA01&0x18

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_350C&SUBSYS_00000000&REV_0
 1\4&641DA44&0&0310

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_3518&SUBSYS_00000000&REV_0
 1\5&38BD847A&0&100010

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_3514&SUBSYS_00000000&REV_0
 1\5&38BD847A&0&080010

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_3510&SUBSYS_00000000&REV_0
 1\5&38BD847A&0&000010

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf

Not Available
 PCI\VEN_8086&DEV_3500&SUBSYS_00000000&REV_0
 1\4&641DA44&0&0010

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_25E2&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&10

PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25D8&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&00

PCI bus Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0A03\2&DABA3PF&0

Intel Processor Yes PROCESSOR 5.2.3790.3959
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-_X86_FAMILY_6_MODEL_23__3

Intel Processor Yes PROCESSOR 5.2.3790.3959
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-_X86_FAMILY_6_MODEL_23__2

Intel Processor Yes PROCESSOR 5.2.3790.3959
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-_X86_FAMILY_6_MODEL_23__1

Intel Processor Yes PROCESSOR 5.2.3790.3959
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-_X86_FAMILY_6_MODEL_23__0

Microsoft ACPI-Compliant System Yes
 SYSTEM 5.2.3790.0 10/1/2002
 Microsoft acpi.inf Not Available
 ACPI_HAL\PNPC0C8\0

ACPI Multiprocessor PC Yes COMPUTER
 5.2.3790.1830 10/1/2002 (Standard
 computers) hal.inf Not Available
 ROOT\ACPI_HAL\0000

Not Available Not Available Not Available
 Not Available Not Available Not Available
 Available Not Available Not Available
 HTREE\ROOT\0

[Environment Variables]

Variable Value User Name
 ClusterLog C:\WINDOWS\Cluster\cluster.log
 <SYSTEM>
 ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
 FP_NO_HOST_CHECK NO <SYSTEM>
 lib C:\Program Files\SQLXML 4.0\bin\<SYSTEM>
 NUMBER_OF_PROCESSORS 4 <SYSTEM>
 OS Windows_NT <SYSTEM>
 Path %SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\WBem;C:\Program Files\Microsoft SQL Server\80\Tools\Binn\;C:\Program Files\Microsoft SQL

```

Server\90\Tools\binn\;C:\Program Files\Microsoft SQL
Server\90\DTs\Binn\;C:\Program Files\Microsoft SQL
Server\90\Tools\Binn\VSShell\Common7\IDE\;C:\Program
Files\Microsoft Visual Studio
8\Common7\IDE\PrivateAssemblies\;C:\Inetpub\AdminScri
pts <SYSTEM>
PATHEXT
.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
;.WSH <SYSTEM>
PROCESSOR_ARCHITECTURE x86 <SYSTEM>
PROCESSOR_IDENTIFIER x86 Family 6 Model 23
Stepping 6, GenuineIntel <SYSTEM>
PROCESSOR_LEVEL 6 <SYSTEM>
PROCESSOR_REVISION 1706 <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
windir %SystemRoot% <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE

[Print Jobs]

Document Size Owner Notify Status
Time Submitted Start Time
Until Time Elapsed Time
Pages Printed Job ID Priority
Parameters Driver Print
Processor Host Print Queue Data Type Name

[Network Connections]

Local Name Remote Name Type
Status User Name

[Running Tasks]

Name Path Process ID Priority Min
Working Set Max Working Set Start Time
Version Size File Date
system idle process Not Available 0 0
Not Available Not Available Not
Available Not Available Not Available Not
Available
system Not Available 4 8 0
1380 Not Available Not Available
Not Available Not Available
smss.exe Not Available 332 11 200
1380 10/21/2008 8:09 AM Not Available
Not Available Not Available
csrss.exe Not Available 380 13 Not
Available Not Available 10/21/2008 8:09 AM Not
Available Not Available

```

```

winlogon.exe c:\windows\system32\winlogon.exe
408 13 200 1380
10/21/2008 8:09 AM 5.2.3790.3959
(srvo3_sp2_rtm.070216-1710) 516.00 KB (528,384
bytes) 4/8/2008 9:04 AM
services.exe c:\windows\system32\services.exe
456 9 200 1380
10/21/2008 8:09 AM 5.2.3790.3959
(srvo3_sp2_rtm.070216-1710) 108.50 KB (111,104
bytes) 11/30/2005 6:00 AM
lsass.exe c:\windows\system32\lsass.exe 468 9
200 1380 10/21/2008 8:09 AM
5.2.3790.0 (srvo3_rtm.030324-2048)
13.00 KB (13,312 bytes) 11/30/2005
6:00 AM
svchost.exe c:\windows\system32\svchost.exe
644 8 200 1380
10/21/2008 8:09 AM 5.2.3790.3959
(srvo3_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/8/2008 9:04 AM
svchost.exe Not Available 712 8
Not Available Not Available
10/21/2008 8:09 AM Not Available Not
Available Not Available
svchost.exe Not Available 772 8
Not Available Not Available
10/21/2008 8:09 AM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
796 8 200 1380
10/21/2008 8:09 AM 5.2.3790.3959
(srvo3_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/8/2008 9:04 AM
msdtc.exe Not Available 900 8 Not
Available Not Available 10/21/2008 8:09 AM Not
Available Not Available
aclclient.exe c:\program
files\altiris\aclclient\aclclient.exe 1004 8
200 1380 10/21/2008 8:09 AM
6.9.164 5.10 MB (5,349,452 bytes)
8/13/2007 3:16 PM
svchost.exe c:\windows\system32\svchost.exe
1084 8 200 1380
10/21/2008 8:09 AM 5.2.3790.3959
(srvo3_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/8/2008 9:04 AM
inetinfo.exe
c:\windows\system32\inetsrv\inetinfo.exe
1172 8 200 1380
10/21/2008 8:09 AM 6.0.3790.3959
(srvo3_sp2_rtm.070216-1710) 14.00 KB (14,336 bytes)
4/8/2008 9:06 AM
svchost.exe Not Available 1224 8
Not Available Not Available
10/21/2008 8:09 AM Not Available Not
Available Not Available
sysdown.exe c:\windows\system32\sysdown.exe
1256 8 200 1380
10/21/2008 8:09 AM 1.1.0.0 built by:
buildsrv 6.50 KB (6,656 bytes) 8/13/2007
1:52 PM

```

```

svchost.exe c:\windows\system32\svchost.exe
1304 8 200 1380
10/21/2008 8:09 AM 5.2.3790.3959
(srvo3_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/8/2008 9:04 AM
svchost.exe Not Available 1328 8
Not Available Not Available
10/21/2008 8:09 AM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
1676 8 200 1380
10/21/2008 8:10 AM 5.2.3790.3959
(srvo3_sp2_rtm.070216-1710) 14.50 KB (14,848 bytes)
4/8/2008 9:04 AM
wmiprvse.exe Not Available 1908 8
Not Available Not Available
10/21/2008 8:11 AM Not Available Not
Available Not Available
dllhost.exe c:\windows\system32\dllhost.exe
780 8 200 1380
10/21/2008 8:16 AM 5.2.3790.3959
(srvo3_sp2_rtm.070216-1710) 5.50 KB (5,632 bytes)
4/8/2008 9:05 AM
logon.scr Not Available 708 4 Not
Available Not Available 10/21/2008 8:19 AM Not
Available Not Available Not Available
msinfo32.exe c:\program
files\microsoft shared\msinfo\msinfo32.exe
5480 8 200 1380
10/21/2008 2:58 PM 5.2.3790.3959
(srvo3_sp2_rtm.070216-1710) 42.00 KB (43,008 bytes)
8/7/2007 2:52 PM
wmiprvse.exe Not Available 6120 8
Not Available Not Available
10/21/2008 2:58 PM Not Available Not
Available Not Available

[Loaded Modules]

Name Version Size File Date Manufacturer
Path
winlogon 5.2.3790.3959 (srvo3_sp2_rtm.070216-1710)
516.00 KB (528,384 bytes) 4/8/2008 9:04
AM Microsoft Corporation
c:\windows\system32\winlogon.exe
ntdll 5.2.3790.3959 (srvo3_sp2_rtm.070216-1710)
747.50 KB (765,440 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntdll.dll
kernel32 5.2.3790.3959 (srvo3_sp2_rtm.070216-1710)
1,013.00 KB (1,037,312 bytes) 4/8/2008 9:05
AM Microsoft Corporation
c:\windows\system32\kernel32.dll
advapi32 5.2.3790.3959 (srvo3_sp2_rtm.070216-1710)
604.00 KB (618,496 bytes) 11/30/2005
6:00 AM Microsoft Corporation
c:\windows\system32\advapi32.dll
rpcrt4 5.2.3790.3959 (srvo3_sp2_rtm.070216-1710)
627.00 KB (642,048 bytes) 4/8/2008 9:05
AM Microsoft Corporation
c:\windows\system32\rpcrt4.dll

```

secur32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 63.50 KB (65,024 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\secur32.dll	
crypt32	5.131.3790.3959 (srv03_sp2_rtm.070216-1710) 581.50 KB (595,456 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\crypt32.dll	
msvcrt	7.0.3790.3959 (srv03_sp2_rtm.070216-1710) 340.50 KB (348,672 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\msvcrt.dll	
user32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 570.00 KB (583,680 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\user32.dll	
gdi32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 276.00 KB (282,624 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\gdi32.dll	
msasn1	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 56.00 KB (57,344 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\msasn1.dll	
nddeapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 17.50 KB (17,920 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\nddeapi.dll	
profmap	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 22.00 KB (22,528 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\profmap.dll	
netapi32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 337.00 KB (345,088 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\netapi32.dll	
userenv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 762.50 KB (780,800 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\userenv.dll	
psapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 20.00 KB (20,480 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\psapi.dll	
regapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 55.00 KB (56,320 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\regapi.dll	
setupapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 1.02 MB (1,069,568 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\setupapi.dll	
version	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 18.00 KB (18,432 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\version.dll	
winsta	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 55.00 KB (56,320 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\winsta.dll	
ws2_32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 81.50 KB (83,456 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\ws2_32.dll	
ws2help	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 19.00 KB (19,456 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\ws2help.dll	
msgina	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 1.15 MB (1,208,320 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\msgina.dll	
shsvcs	6.00.3790.3959 (srv03_sp2_rtm.070216-1710) 132.00 KB (135,168 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\shsvcs.dll	
shlwapi	6.00.3790.3959 (srv03_sp2_rtm.070216-1710) 312.50 KB (320,000 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\shlwapi.dll	
sfc	5.2.3790.0 (srv03_rtm.030324-2048) 4.50 KB (4,608 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\sfc.dll	
sfc_os	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 138.00 KB (141,312 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\sfc_os.dll	
wintrust	5.131.3790.3959 (srv03_sp2_rtm.070216-1710) 162.00 KB (165,888 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\wintrust.dll	
imagehlp	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 144.50 KB (147,968 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\imagehlp.dll	
ole32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 1.21 MB (1,267,200 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\ole32.dll	
comctl32	6.0 (srv03_sp2_rtm.070216-1710) 1.00 MB (1,051,648 bytes)	2/18/2007
12:01 AM	Microsoft Corporation c:\windows\system32\comctl32.dll	
winscard	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 97.00 KB (99,328 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\winscard.dll	
wtsapi32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 19.00 KB (19,456 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\wtsapi32.dll	
sxs	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 744.50 KB (762,368 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\sxs.dll	
winmm	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 170.00 KB (174,080 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\winmm.dll	
shell32	6.00.3790.3959 (srv03_sp2_rtm.070216-1710) 7.97 MB (8,359,936 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\shell32.dll	
rsaenh	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 208.34 KB (213,336 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\rsaenh.dll	
wldap32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 175.50 KB (179,712 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\wldap32.dll	
cscdll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 99.50 KB (101,888 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\cscdll.dll	
dimsntfy	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 19.00 KB (19,456 bytes)	4/8/2008 9:08
AM	Microsoft Corporation c:\windows\system32\dimsnfny.dll	
wlnotify	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 94.50 KB (96,768 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\wlnotify.dll	
winspool	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 147.00 KB (150,528 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\winspool.drv	
mpc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 56.50 KB (57,856 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\mpc.dll	
oleaut32	5.2.3790.3959 bytes) 540.00 KB (552,960	
	11/30/2005 6:00 AM Microsoft Corporation c:\windows\system32\oleaut32.dll	
comctl32	5.82 (srv03_sp2_rtm.070216-1710) 585.00 KB (599,040 bytes)	2/18/2007
12:01 AM	Microsoft Corporation c:\windows\winsxs\x86_microsoft.windows.com mon-controls_6595b64144ccf1df_5.82.3790.3959_x- ww_d8713e59\comctl32.dll	
uxtheme	6.00.3790.3959 (srv03_sp2_rtm.070216-1710) 202.00 KB (206,848 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\uxtheme.dll	
clbcatq	2001.12.4720.3959 (srv03_sp2_rtm.070216- 1710) 499.00 KB (510,976 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\clbcatq.dll	
comres	2001.12.4720.3959 (srv03_sp2_rtm.070216- 1710) 778.50 KB (797,184 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\comres.dll	
wbemprox	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 20.50 KB (20,992 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\wbemprox.dll	
wbemcomn	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 220.50 KB (225,792 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\wbemcomn.dll	
xpssp2res	5.2.3790.3959 (srv03_sp2_rtm.070216-1710) 2.76 MB (2,897,920 bytes)	4/8/2008 9:08

AM	Microsoft Corporation c:\windows\system32\xpsp2res.dll	5.2.3790.0 (srv03_rtm.030324-2048)	42.50 KB (43,520 bytes)	8/7/2007 2:50
PM	Microsoft Corporation c:\windows\system32\wbem\wbemserv.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	471.50 KB (482,816 bytes)	4/8/2008 9:05
fastprox	Microsoft Corporation c:\windows\system32\wbem\fastprox.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	471.50 KB (482,816 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\wbem\msvcp60.dll	7.0.3790.3959 (srv03_sp2_rtm.070216-1710)	393.50 KB (402,944 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\msvcp60.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	393.50 KB (402,944 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\ntdsapi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	156.50 KB (160,256 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\services.exe	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	327.00 KB (334,848 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\scserv.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	69.00 KB (70,656 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\authz.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	125.00 KB (128,000 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\umppnpmgr.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	36.00 KB (36,864 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\ncobjapi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	67.00 KB (68,608 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\eventlog.dll	5.2.3790.0 (srv03_rtm.030324-2048)	13.00 KB (13,312 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\lsass.exe	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	796.00 KB (815,104 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\lsasrv.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	444.00 KB (454,656 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\samsrv.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	32.50 KB (33,280 bytes)	4/8/2008 9:05
cryptdll	Microsoft Corporation c:\windows\system32\cryptdll.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	6.00 KB (6,656 bytes)	4/8/2008 9:05
samlib	Microsoft Corporation c:\windows\system32\samlib.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	46.00 KB (47,104 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\msprivs.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	46.50 KB (47,616 bytes)	11/30/2005
kerberos	Microsoft Corporation c:\windows\system32\kerberos.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	342.50 KB (350,720 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\msv1_0.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	140.00 KB (143,360 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\iphlpapi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	93.00 KB (95,232 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\netlogon.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	420.50 KB (430,592 bytes)	4/8/2008 9:05
w3sssl	Microsoft Corporation c:\windows\system32\w3sssl.dll	6.0.3790.0 (srv03_rtm.030324-2048)	15.00 KB (15,360 bytes)	11/30/2005
6:00 AM	Microsoft Corporation c:\windows\system32\strmfilt.dll	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)	84.00 KB (86,016 bytes)	4/8/2008 9:05
httpapi	Microsoft Corporation c:\windows\system32\httpapi.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	24.00 KB (24,576 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\hnetcfg.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	347.00 KB (355,328 bytes)	4/8/2008 9:05
wshtcpip	Microsoft Corporation c:\windows\system32\wshtcpip.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	18.50 KB (18,944 bytes)	4/8/2008 9:04
AM	Microsoft Corporation c:\windows\system32\dssenh.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	143.84 KB (147,288 bytes)	4/8/2008 9:05
svchost	Microsoft Corporation c:\windows\system32\svchost.exe	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	14.50 KB (14,848 bytes)	4/8/2008 9:04
rpcss	Microsoft Corporation c:\windows\system32\rpcss.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	470.50 KB (481,792 bytes)	4/8/2008 9:05
AM	Microsoft Corporation c:\windows\system32\ntmarta.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	119.00 KB (121,856 bytes)	4/8/2008 9:05
schedsvc	Microsoft Corporation c:\windows\system32\schedsvc.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	197.50 KB (202,240 bytes)	4/8/2008 9:04
wiarpco	Microsoft Corporation c:\windows\system32\wiarpco.dll	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	32.50 KB (33,280 bytes)	4/8/2008 9:04
msidle	Microsoft Corporation c:\windows\system32\msidle.dll	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)	6.50 KB (6,656 bytes)	4/8/2008 9:05

audiosrv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	40.50 KB (41,472 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\audiosrv.dll	
wkssvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	130.00 KB (133,120 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wkssvc.dll	
aelupsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	26.00 KB (26,624 bytes)	4/8/2008 9:08
AM	Microsoft Corporation	
	c:\windows\system32\aelupsvc.dll	
apphelp	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	145.50 KB (148,992 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\apphelp.dll	
cryptsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	55.00 KB (56,320 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\cryptsvc.dll	
certcli	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	228.50 KB (233,984 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\certcli.dll	
atl	3.05.2283 83.00 KB (84,992 bytes)	
	11/30/2005 6:00 AM Microsoft Corporation	
	c:\windows\system32\atl.dll	
vssapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	548.50 KB (561,664 bytes)	4/8/2008 9:04
AM	Microsoft Corporation	
	c:\windows\system32\vssapi.dll	
dmserver	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	25.50 KB (26,112 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\dmserver.dll	
es	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)	
	233.00 KB (238,592 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\es.dll	
pchsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	39.00 KB (39,936 bytes)	4/8/2008 9:06
AM	Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\pchsvc.dll	
srvsvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	93.00 KB (95,232 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\srvsvc.dll	
seclogon	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	18.00 KB (18,432 bytes)	4/8/2008 9:04
AM	Microsoft Corporation	
	c:\windows\system32\seclogon.dll	
sens	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	36.50 KB (37,376 bytes)	4/8/2008 9:04
AM	Microsoft Corporation	
	c:\windows\system32\sens.dll	
trkwks	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	84.50 KB (86,528 bytes)	4/8/2008 9:04
AM	Microsoft Corporation	
	c:\windows\system32\trkwks.dll	
wmisvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	140.00 KB (143,360 bytes)	4/8/2008 9:05

AM	Microsoft Corporation	
	c:\windows\system32\wbem\wmisvc.dll	
comsvcs	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)	
	1.24 MB (1,295,872 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\comsvcs.dll	
browser	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	76.50 KB (78,336 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\browser.dll	
wbemcore	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	498.50 KB (510,464 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\wbemcore.dll	
esscli	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	250.00 KB (256,000 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\wbem\esscli.dll	
wmiutils	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	93.50 KB (95,744 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\wbem\wmiutils.dll	
repdrvfs	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	172.50 KB (176,640 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\wbem\repdrvfs.dll	
wmiprvsd	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	404.00 KB (413,696 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\wbem\wmiprvsd.dll	
wbemess	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	271.50 KB (278,016 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemess.dll	
netrap	5.2.3790.3959 (srv03_rtm.030324-2048)	
	11.50 KB (11,776 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\netrap.dll	
ncprov	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	46.50 KB (47,616 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\wbem\ncprov.dll	
ntlsapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	8.00 KB (8,192 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\ntlsapi.dll	
wbemcons	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	45.50 KB (46,592 bytes)	8/7/2007 2:49
PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcons.dll	
aclient	6.9.164 5.10 MB (5,349,452 bytes)	
	8/13/2007 3:16 PM Altiris, Inc.	
	c:\program	
files\altiris\aclient\aclient.exe		
comdlg32	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)	
	267.00 KB (273,408 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\comdlg32.dll	
wsock32	5.2.3790.0 (srv03_rtm.030324-2048)	
	22.00 KB (22,528 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wsock32.dll	

riched32	5.2.3790.0 (srv03_rtm.030324-2048)	
	3.50 KB (3,584 bytes)	11/30/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\riched32.dll	
riched20	5.31.23.1225 433.00 KB (443,392 bytes)	
	4/8/2008 9:05 AM Microsoft Corporation	
	c:\windows\system32\riched20.dll	
activeds	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	195.50 KB (200,192 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\activeds.dll	
adslpdc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	149.50 KB (153,088 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\adslpdc.dll	
credui	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	162.00 KB (165,888 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\credui.dll	
mprapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	88.50 KB (90,624 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\mprapi.dll	
rtutil	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	34.00 KB (34,816 bytes)	4/8/2008 9:04
AM	Microsoft Corporation	
	c:\windows\system32\rtutil.dll	
ersvc	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)	
	24.00 KB (24,576 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\ersvc.dll	
inetinfo	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)	
	14.00 KB (14,336 bytes)	4/8/2008 9:06
AM	Microsoft Corporation	
	c:\windows\system32\inetsrv\inetinfo.exe	
iisutil	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)	
	164.00 KB (167,936 bytes)	4/8/2008 9:06
AM	Microsoft Corporation	
	c:\windows\system32\inetsrv\iisutil.dll	
rpcref	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)	
	4.00 KB (4,096 bytes)	4/8/2008 9:06
AM	Microsoft Corporation	
	c:\windows\system32\rpcref.dll	
iisrtl	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)	
	138.50 KB (141,824 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\iisrtl.dll	
iisadmin	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)	
	21.00 KB (21,504 bytes)	4/8/2008 9:06
AM	Microsoft Corporation	
	c:\windows\system32\inetsrv\iisadmin.dll	
coadmin	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)	
	62.50 KB (64,000 bytes)	4/8/2008 9:06
AM	Microsoft Corporation	
	c:\windows\system32\inetsrv\coadmin.dll	
admwpox	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)	
	47.00 KB (48,128 bytes)	4/8/2008 9:05
AM	Microsoft Corporation	
	c:\windows\system32\admwpox.dll	

iiscfg	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)		
	1.08 MB (1,133,056 bytes)	4/8/2008 9:06	
AM	Microsoft Corporation		
	c:\windows\system32\inetsrv\iiscfg.dll		
metadata	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)		
	229.00 KB (234,496 bytes)	4/8/2008 9:06	
AM	Microsoft Corporation		
	c:\windows\system32\inetsrv\metadata.dll		
msxml3	8.80.1185.0 1.08 MB (1,131,520 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\msxml3.dll		
svcext	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)		
	43.50 KB (44,544 bytes)	4/8/2008 9:06	AM Microsoft Corporation
	c:\windows\system32\inetsrv\svcext.dll		
security	5.2.3790.0 (srv03_rtm.030324-2048)		
	5.50 KB (5,632 bytes)	11/30/2005	AM Microsoft Corporation
6:00 AM	c:\windows\system32\security.dll		
iismap	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)		
	58.50 KB (59,904 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\iismap.dll		
wamreg	6.0.3790.3959 (srv03_sp2_rtm.070216-1710)		
	54.50 KB (55,808 bytes)	4/8/2008 9:06	AM Microsoft Corporation
	c:\windows\system32\inetsrv\wamreg.dll		
sysdown	1.1.0.0 built by: buildsrv 6.50 KB (6,656 bytes)	8/13/2007 1:52 PM	Hewlett-Packard Company c:\windows\system32\sysdown.exe
tapisrv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	249.00 KB (254,976 bytes)	4/8/2008 9:04	AM Microsoft Corporation
	c:\windows\system32\tapisrv.dll		
termsrv	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	240.00 KB (245,760 bytes)	4/8/2008 9:04	AM Microsoft Corporation
	c:\windows\system32\termsrv.dll		
icaapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	12.50 KB (12,800 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\icaapi.dll		
mstlsapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	117.00 KB (119,808 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\mstlsapi.dll		
rdpwsx	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	102.13 KB (104,584 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\rdpwsx.dll		
dllhost	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	5.50 KB (5,632 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\dllhost.exe		
txfllog	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)		
	96.00 KB (98,304 bytes)	4/8/2008 9:04	AM Microsoft Corporation
	c:\windows\system32\txfllog.dll		
xolehlp	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)		
	10.50 KB (10,752 bytes)	4/8/2008 9:04	

AM	Microsoft Corporation		
	c:\windows\system32\xolehlp.dll		
msdtcprx	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)		
	458.00 KB (468,992 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\msdtcprx.dll		
mtxclu	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)		
	77.50 KB (79,360 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\mtxclu.dll		
clusapi	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	59.50 KB (60,928 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\clusapi.dll		
resutils	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	62.00 KB (63,488 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\resutils.dll		
winrnr	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	17.00 KB (17,408 bytes)	4/8/2008 9:04	AM Microsoft Corporation
	c:\windows\system32\winrnr.dll		
rasadhlp	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	7.50 KB (7,680 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\rasadhlp.dll		
catsrv	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)		
	266.50 KB (272,896 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\catsrv.dll		
clbcatex	2001.12.4720.3959 (srv03_sp2_rtm.070216-1710)		
	102.00 KB (104,448 bytes)	4/8/2008 9:05	AM Microsoft Corporation
	c:\windows\system32\clbcatex.dll		
msinfo32	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	42.00 KB (43,008 bytes)	8/7/2007 2:52	PM Microsoft Corporation c:\program files\common_files\microsoft\shared\msinfo\msinfo32.exe
	c:\windows\system32\msinfo32.dll		
mfc42u	6.06.8063.0 1.11 MB (1,163,776 bytes)	11/30/2005 6:00 AM	Microsoft Corporation
	c:\windows\system32\mfcc42u.dll		
wininet	6.00.3790.3959 (srv03_sp2_rtm.070216-1710)		
	655.00 KB (670,720 bytes)	4/8/2008 9:04	AM Microsoft Corporation
	c:\windows\system32\wininet.dll		
odbc32	3.526.3959.0 (srv03_sp2_rtm.070216-1710)		
	240.00 KB (245,760 bytes)	11/30/2005	6:00 AM Microsoft Corporation
	c:\windows\system32\odbc32.dll		
odbcint	3.526.3959.0 (srv03_sp2_rtm.070216-1710)		
	92.00 KB (94,208 bytes)	11/30/2005	6:00 AM Microsoft Corporation
	c:\windows\system32\odbcint.dll		
msinfo	5.2.3790.3959 (srv03_sp2_rtm.070216-1710)		
	376.00 KB (385,024 bytes)	8/7/2007 2:52	PM Microsoft Corporation
	c:\windows\pchealth\helpctr\binaries\msinfo.dll		
	[Services]		

Display Name	Name	State	Start Mode
	Service Type	Path	Error Control
	Start Name	Tag ID	
Altiris Client Service	AClient	Running	
	Auto	Own Process	c:\program files\altiris\aclient\aclient.exe -service
	Normal	LocalSystem	0
Application Experience Lookup Service	AeLookupSvc	Running	Auto Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem
Alerter	Alerter	Stopped	Disabled Share Process
	c:\windows\system32\svchost.exe -k	Normal	LocalSystem
localservice	LocalService	Normal	NT
AUTHORITY\LocalService		0	
Application Layer Gateway Service	ALG	Stopped	Manual Own Process
	c:\windows\system32\alg.exe	Normal	NT
AUTHORITY\LocalService		0	
Application Management	AppMgmt	Stopped	Manual Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem
ASP.NET State Service	aspnet_state	Running	
	Stopped	Manual Own Process	
	c:\windows\microsoft.net\framework\v2.0.507	Normal	LocalSystem
27\aspnet_state.exe	Normal	NT	
AUTHORITY\NetworkService		0	
Windows Audio	AudioSrv	Running	Auto Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem
Background Intelligent Transfer Service	BITS	Stopped	Manual Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem
Computer Browser	Browser	Running	Auto Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem
Indexing Service	CiSvc	Stopped	Disabled Share Process
	c:\windows\system32\ciscv.exe	Normal	LocalSystem
ClipBook	ClipSrv	Stopped	Disabled Own Process
	c:\windows\system32\clipsrv.exe	Normal	LocalSystem
.NET Runtime Optimization Service	clr_optimization_v2.0.50727_x86	Running	
	Stopped	Manual Own Process	
	c:\windows\microsoft.net\framework\v2.0.507	Normal	LocalSystem
27\mscorsvv.exe	Ignore	LocalSystem	0
COM+ System Application	COMSysApp	Running	
	Manual Own Process		
	c:\windows\system32\dlldhost.exe	Normal	LocalSystem
	/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}	Normal	LocalSystem
Cryptographic Services	CryptSvc	Running	Auto Share Process
	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem

```

DCOM Server Process Launcher DcomLaunch
    Running Auto Share Process
    c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0

Distributed File System Dfs Stopped
    Manual Own Process
    c:\windows\system32\dfssvc.exe
Normal LocalSystem 0

DHCP Client Dhcp Stopped Disabled
    Share Process
    c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0

Logical Disk Manager Administrative Service
    dmadmin Stopped Manual Share Process
    c:\windows\system32\dmadmin.exe /com
Normal LocalSystem 0

Logical Disk Manager dmserver Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

DNS Client DnsCache Running Auto
    Share Process
    c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0

Error Reporting Service ERSvc Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0

Event Log Eventlog Running Auto Share Process
    c:\windows\system32\services.exe
Normal LocalSystem 0

COM+ Event System EventSystem Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Help and Support helpsvc Running Auto
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Human Interface Device Access HidServ Stopped
    Disabled Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

HTTP SSL HTTPFilter Running Manual
    Share Process
    c:\windows\system32\lsass.exe Normal
LocalSystem 0

IIS Admin Service IISADMIN Running Auto
    Share Process
    c:\windows\system32\inetsrv\inetinfo.exe
Normal LocalSystem 0

IMAPI CD-Burning COM Service ImapIService
    Stopped Disabled Own Process
    c:\windows\system32\imapi.exe Normal
LocalSystem 0

Intersite Messaging IsmServ Stopped Disabled Own
Process c:\windows\system32\ismserv.exe
Normal LocalSystem 0

```

```

Kerberos Key Distribution Center kdc
    Stopped Disabled Share Process
    c:\windows\system32\lsass.exe Normal
LocalSystem 0

Server lanmanserver Running Auto
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Workstation lanmanworkstation Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

License Logging LicenseService Stopped
    Disabled Own Process
    c:\windows\system32\llssrv.exe
Normal NT AUTHORITY\NetworkService 0

TCP/IP NetBIOS Helper lmhosts Stopped
    Disabled Share Process
    c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0

Messenger Messenger Stopped Disabled Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

NetMeeting Remote Desktop Sharing mnmsrvc
    Stopped Disabled Own Process
    c:\windows\system32\mnmsrvc.exe
Normal LocalSystem 0

Distributed Transaction Coordinator MSDTC
    Running Auto Own Process
    c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 0

Windows Installer MSIServer Stopped Manual
    Share Process
    c:\windows\system32\msiexec.exe /v
Normal LocalSystem 0

Visual Studio 2005 Remote Debugger msvsmon80
    Stopped Disabled Own Process
    "c:\program files\microsoft visual studio
8\common7\ide\remote debugger\x86\msvsmon.exe"
/service msvsmon80 Ignore LocalSystem 0

Network DDE NetDDE Stopped Disabled
    Share Process
    c:\windows\system32\netdde.exe
Normal LocalSystem 0

Network DDE DSDM NetDDEdsm Stopped
    Disabled Share Process
    c:\windows\system32\netdde.exe
Normal LocalSystem 0

Net Logon Netlogon Stopped Manual Share Process
    c:\windows\system32\lsass.exe Normal
LocalSystem 0

Network Connections Netman Stopped Manual
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Network Location Awareness (NLA) Nla
    Stopped Manual Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

File Replication NtFrs Stopped Manual Own
Process c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0

NT LM Security Support Provider NtLmSsp
    Stopped Manual Share Process
    c:\windows\system32\lsass.exe Normal
LocalSystem 0

Removable Storage NtmsSvc Stopped Manual
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Office Source Engine ose Stopped
    Manual Own Process "c:\program
files\common files\microsoft shared\source
engine\ose.exe" Normal LocalSystem 0

Plug and Play PlugPlay Running Auto
    Share Process
    c:\windows\system32\services.exe
Normal LocalSystem 0

IPSEC Services PolicyAgent Stopped
    Disabled Share Process
    c:\windows\system32\lsass.exe Normal
LocalSystem 0

Protected Storage ProtectedStorage Running
    Auto Share Process
    c:\windows\system32\lsass.exe Normal
LocalSystem 0

Remote Access Auto Connection Manager RasAuto
    Stopped Manual Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Remote Access Connection Manager RasMan
    Stopped Manual Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Remote Desktop Help Session Manager RDSSessMgr
    Stopped Manual Own Process
    c:\windows\system32\sessmgr.exe
Normal LocalSystem 0

Routing and Remote Access RemoteAccess
    Stopped Disabled Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Remote Registry RemoteRegistry Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k regsvc
Normal NT AUTHORITY\LocalService 0

Remote Procedure Call (RPC) Locator RpcLocator
    Stopped Manual Own Process
    c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0

Remote Procedure Call (RPC) RpcSs Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k rpcss
Normal NT Authority\NetworkService 0

Resultant Set of Policy Provider RSOPProv
    Stopped Manual Share Process

```

```

c:\windows\system32\rsopprov.exe
Normal LocalSystem 0
Special Administration Console Helper sacsvr
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Smart Card SCardSrv Stopped Manual
Share Process
c:\windows\system32\scardsvr.exe
Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Secondary Logon seclogon Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
SharedAccess Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Stopped Disabled Own
Process c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0
Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
HP ProLiant System Shutdown Service sysdown
Running Auto Own Process
c:\windows\system32\sysdown.exe
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Auto Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0
Telephony TapiSrv Running Auto Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Manual Share Process

```

```

c:\windows\system32\svchost.exe -k termsvcs
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0
Distributed Link Tracking Server TrkSrv
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process
c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
Stopped Manual Own Process
c:\windows\system32\wdfmgr.exe
Normal NT AUTHORITY\LocalService 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
Manual Own Process
c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vssvc.exe Normal
LocalSystem 0
Windows Time W32Time Running Auto
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
World Wide Web Publishing Service W3SVC
Stopped Auto Share Process
c:\windows\system32\svchost.exe -k iissvcs
Normal LocalSystem 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Portable Media Serial Number Service WmdmPmsN
Stopped Manual Share Process

```

```

c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped
Manual Own Process
c:\windows\system32\wbem\wmiapsrv.exe
Normal LocalSystem 0
Automatic Updates wuauserv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Wireless Configuration WZCSVC Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Provisioning Service xmlprov Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
[Program Groups]
Group Name Name User Name
Accessories Default User:Accessories
Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Startup Default User:Startup Default User
Accessories All Users:Accessories All
Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
HP System Tools All Users:HP System Tools All
Users
HP System Tools\HP Array Diagnostic Utility All
Users:HP System Tools\HP Array Diagnostic Utility All
Users
Microsoft SQL Server 2005 All Users:Microsoft SQL
Server 2005 All Users
Microsoft SQL Server 2005\Analysis Services All
Users:Microsoft SQL Server 2005\Analysis Services All
Users
Microsoft SQL Server 2005\Configuration Tools All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users

```

```

Microsoft SQL Server 2005\Documentation and Tutorials
All Users:Microsoft SQL Server
2005\Documentation and Tutorials All Users
Microsoft SQL Server 2005\Documentation and
Tutorials\Tutorials All Users:Microsoft SQL Server
2005\Documentation and Tutorials\Tutorials All
Users
Microsoft SQL Server 2005\Performance Tools All
Users:Microsoft SQL Server 2005\Performance Tools All
Users
Microsoft Visual Studio 2005 All Users:Microsoft
Visual Studio 2005 All Users
Microsoft Visual Studio 2005\Visual Studio Tools All
Users:Microsoft Visual Studio 2005\Visual Studio
Tools All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories
    NT AUTHORITY\SYSTEM\SYSTEM:Accessories
Accessories\Accessibility NT
AUTHORITY\SYSTEM:Accessories\Accessibility NT
AUTHORITY\SYSTEM
Accessories\Entertainment NT
AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM

[Startup Programs]

Program Command User Name Location
desktop desktop.ini NT AUTHORITY\SYSTEM
Startup
desktop desktop.ini .DEFAULT Startup
desktop desktop.ini All Users Common
Startup
AClntUsr c:\program
files\altiris\client\aclntusr.exe All Users
HKLM\SOFTWARE\Microsoft\Windows\CurrentVers
ion\Run

[OLE Registration]

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available
WordPad Document "%programfiles%\windows
nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object Not
Available
Bitmap Image mspaint.exe

[Windows Error Reporting]

Time Type Details

[Internet Settings]

```

[Internet Explorer]				
[Following are sub-categories of this main category]				
[Summary]				
Item	Value			
Version	6.0.3790.3959			
Build	63790.3959			
Application Path	C:\Program Files\Internet Explorer			
Language	English (United States)			
Active Printer	Not Available			
Cipher Strength	128-bit			
Content Advisor	Disabled			
IEAK Install	No			
[File Versions]				
File	Version	Size	Date	Path
actxprxy.dll	6.0.3790.3959	97 KB	2/17/2007 2:16:16 AM	C:\WINDOWS\system32 Microsoft Corporation
advpack.dll	6.0.3790.3959	98 KB	2/17/2007 2:16:46 AM	C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx	6.0.3790.0	90 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browselc.dll	6.0.3790.0	62 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browseui.dll	6.0.3790.3959	1,009 KB	2/17/2007 2:22:54 AM	C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll	6.0.3790.3959	148 KB	2/17/2007 2:23:26 AM	C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll	5.82.3790.3959	585 KB	2/17/2007 2:31:40 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtrans.dll	6.3.3790.3959	205 KB	2/17/2007 2:52:40 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll	6.3.3790.3959	353 KB	2/17/2007 2:52:36 AM	C:\WINDOWS\system32 Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available

iecontlc.dll <File Missing> Not Available				
Not Available	Not Available	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3790.3959	324 KB	2/17/2007 3:18:24 AM	C:\WINDOWS\system32 Microsoft Corporation
ipeers.dll	6.0.3790.3959	248 KB	2/17/2007 3:18:36 AM	C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll	6.0.3790.3959	61 KB	2/17/2007 3:18:36 AM	C:\WINDOWS\system32 Microsoft Corporation
ieuinit.inf	Not Available	24 KB	2/17/2007 3:18:36 AM	C:\WINDOWS\system32 Not Available
iexplore.exe	6.0.3790.3959	92 KB	2/17/2007 3:18:36 AM	C:\Program Files\Internet Explorer Microsoft Corporation
imgutil.dll	6.0.3790.3959	38 KB	2/17/2007 3:19:34 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcpl.cpl	6.0.3790.3959	361 KB	2/17/2007 3:19:44 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcplc.dll	6.0.3790.0	109 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inseng.dll	6.0.3790.3959	94 KB	2/17/2007 3:19:54 AM	C:\WINDOWS\system32 Microsoft Corporation
mlang.dll	6.0.3790.3959	576 KB	2/17/2007 3:32:54 AM	C:\WINDOWS\system32 Microsoft Corporation
msencode.dll	2002.10.4.0	112 KB	11/30/2005 7:00:00 AM	C:\WINDOWS\system32 ????????
mshta.exe	6.0.3790.3959	30 KB	2/17/2007 3:35:08 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll	6.0.3790.3959	3,058 KB	2/17/2007 3:35:20 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.tlb	6.0.3790.3959	1,320 KB	2/17/2007 3:35:20 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmled.dll	6.0.3790.3959	447 KB	2/17/2007 3:35:22 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmler.dll	6.0.3790.3959	56 KB	2/17/2007 3:35:24 AM	

```
C:\WINDOWS\system32 Microsoft Corporation
msident.dll      6.0.3790.3959      48 KB
2/17/2007 3:35:30 AM
C:\WINDOWS\system32 Microsoft Corporation

msidntld.dll     6.0.3790.0       15 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msieftp.dll      6.0.3790.3959     244 KB
2/17/2007 3:35:30 AM
C:\WINDOWS\system32 Microsoft Corporation

msrating.dll     6.0.3790.3959     144 KB
2/17/2007 3:36:24 AM
C:\WINDOWS\system32 Microsoft Corporation

mstime.dll      6.0.3790.3959     525 KB
2/17/2007 3:36:40 AM
C:\WINDOWS\system32 Microsoft Corporation

occache.dll      6.0.3790.3959      94 KB
2/17/2007 3:42:52 AM
C:\WINDOWS\system32 Microsoft Corporation

proctexe.ocx     6.3.3790.3959      83 KB
2/17/2007 3:52:42 AM
C:\WINDOWS\system32 Intel Corporation

sendmail.dll     6.0.3790.3959      56 KB
2/17/2007 3:58:56 AM
C:\WINDOWS\system32 Microsoft Corporation

shdoclc.dll     6.0.3790.0       589 KB
11/30/2005 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

shdocvw.dll     6.0.3790.3959    1,473 KB
2/17/2007 3:59:20 AM
C:\WINDOWS\system32 Microsoft Corporation

shfolder.dll     6.0.3790.3959      25 KB
2/17/2007 3:59:28 AM
C:\WINDOWS\system32 Microsoft Corporation

shlwapi.dll      6.0.3790.3959      313 KB
2/17/2007 3:59:42 AM
C:\WINDOWS\system32 Microsoft Corporation

tdc.ocx         1.3.0.3130      58 KB      11/30/2005
7:00:00 AM
C:\WINDOWS\system32 Microsoft
Corporation

url.dll         6.0.3790.3959      37 KB      2/17/2007
4:07:34 AM
C:\WINDOWS\system32 Microsoft
Corporation

urlmon.dll      6.0.3790.3959     682 KB
2/17/2007 4:07:36 AM
C:\WINDOWS\system32 Microsoft Corporation

webcheck.dll     6.0.3790.3959     271 KB
2/17/2007 4:08:42 AM
```

```
C:\WINDOWS\system32 Microsoft Corporation
wininet.dll      6.0.3790.3959     655 KB
2/17/2007 4:09:04 AM
C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]
Item          Value
Connection Preference    Never dial

LAN Settings
AutoConfigProxy  Not Available
AutoProxyDetectMode Enabled
AutoConfigURL
Proxy           Disabled
ProxyServer
ProxyOverride

[Cache]
[ Following are sub-categories of this main category
]

[Summary]
Item          Value
Page Refresh Type  Automatic
Temporary Internet Files Folder  C:\Documents
and Settings\Default User\Local Settings\Temporary
Internet Files
Total Disk Space  Not Available
Available Disk Space  Not Available
Maximum Cache Size Not Available
Available Cache Size Not Available

[List of Objects]
Program File    Status   CodeBase
No cached object information available

[Content]
[ Following are sub-categories of this main category
]

[Summary]
Item          Value
Content Advisor  Disabled

[Personal Certificates]
Issued To Issued By Validity Signature Algorithm
No personal certificate information available

[Other People Certificates]
Issued To Issued By Validity Signature Algorithm
```

No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Medium-low
Trusted sites	Low
Internet	Medium
Restricted sites	High

Microsoft COM Component Configuration Parameters

The component services tool in Windows 2003 was used to change the queue settings for the TPCC COM+ queue components. All tpcc queue components were set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The construction string was Server = myserver; UID= sa; pwd= DATABASE= tpcc; The single queue TpccAllTxn object was used, with the Min and Max both being set to 70 queues. Delivery threads were set under the TPCC key in the registry.

Internet Information Server Registry Parameters

Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo
Class Name: <NO CLASS>
Last Write Time: 10/18/2007 - 3:19 PM

Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters
Class Name: <NO CLASS>
Last Write Time: 10/18/2007 - 3:41 PM

Value 0	Name: ListenBackLog Type: REG_DWORD Data: 0x19
Value 1	Name: PoolThreadLimit Type: REG_DWORD Data: 0xff4
Value 2	Name: MaxPoolThreads Type: REG_DWORD Data: 0x7fa
Value 3	Name: ThreadTimeout Type: REG_DWORD Data: 0x15180
<p>Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\ InetInfo\Performance Class Name: <NO CLASS> Last Write Time: 10/18/2007 - 3:19 PM</p>	
Value 0	Name: Library Type: REG_SZ Data: infoctr.dll
Value 1	Name: Open Type: REG_SZ Data: OpenINFOPerformanceData
Value 2	Name: Close Type: REG_SZ Data: CloseINFOPerformanceData
Value 3	Name: Collect Type: REG_SZ Data: CollectINFOPerformanceData
Value 4	Name: PerfIniFile Type: REG_SZ Data: infoctr.ini
Value 5	Name: Last Counter Type: REG_DWORD Data: 0xc30
Value 6	Name: Last Help Type: REG_DWORD Data: 0xc31
Value 7	

Name: First Counter Type: REG_DWORD Data: 0xbff0	
Value 8 Name: First Help Type: REG_DWORD Data: 0xbff1	
Value 9 Name: Object List Type: REG_SZ Data: 3056	
Value 10 Name: Library Validation Code Type: REG_BINARY Data: 00000000 00 b3 47 24 c4 11 c8 01 - 00 20 00 00 00 00 00 00 . ³ G\$Ã.È.....	
<hr/> <h2 style="text-align: center;">World Wide Web Service Registry Parameters</h2> <hr/>	
<p>Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\ W3SVC Class Name: <NO CLASS> Last Write Time: 10/23/2008 - 8:08 AM</p>	
Value 0	Name: Type Type: REG_DWORD Data: 0x20
Value 1	Name: Start Type: REG_DWORD Data: 0x2
Value 2	Name: ErrorControl Type: REG_DWORD Data: 0x1
Value 3	Name: ImagePath Type: REG_EXPAND_SZ Data: %SystemRoot%\System32\svchost.exe -k iissvcs

Value 4 Name: DisplayName Type: REG_SZ Data: World Wide Web Publishing Service
Value 5 Name: DependOnService Type: REG_MULTI_SZ Data: RPCSS HTTPFilter IISADMIN
Value 6 Name: DependOnGroup Type: REG_MULTI_SZ Data:
Value 7 Name: ObjectName Type: REG_SZ Data: LocalSystem
Value 8 Name: Description Type: REG_SZ Data: Provides Web connectivity and administration through the Internet Information Services Manager
Value 9 Name: FailureActions Type: REG_BINARY Data: 00000000 80 51 01 00 01 00 00 - 00 00 00 00 03 00 00 00 .Q..... 00000010 43 00 4c 00 01 00 00 00 - 01 00 00 00 01 00 00 00 C.L..... 01 00 00 00 01 00 00 00 - 01 00 00 00
Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\ W3SVC\Parameters Class Name: <NO CLASS> Last Write Time: 10/18/2007 - 3:41 PM
Value 0 Name: MajorVersion Type: REG_DWORD Data: 0x6
Value 1 Name: MinorVersion Type: REG_DWORD Data: 0
Value 2 Name: InstallPath Type: REG_SZ Data: C:\WINDOWS\system32\inetsrv
Value 3

Name: AccessDeniedMessage	Type: REG_SZ	Data: Error: Access is Denied.	Type: REG_SZ	Data: w3ctrsl.ini	00000080 01 01 00 00 00 00 00 05 - 06 00 00 00 00 00 14 00 00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b 00 00 00 000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00 00 00 05 000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00 00 00 05 000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12 00 00 00
Value 4			Value 5	Name: Last Counter	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Enum
Name: ServiceDll	Type: REG_EXPAND_SZ	Data:	Type: REG_DWORD	Type: REG_DWORD	Class Name: <NO CLASS> Last Write Time: 10/23/2008 - 8:08 AM
C:\WINDOWS\system32\inetsrv\iisw3adm.dll			Data: 0xd28	Data: 0xd29	Value 0 Name: 0 Type: REG_SZ Data: Root\LEGACY_W3SVC\0000
Value 5			Value 6	Name: Last Help	Value 1 Name: Count Type: REG_DWORD Data: 0x1
Name: AcceptExOutstanding	Type: REG_DWORD	Data: 0x28	Type: REG_DWORD	Type: REG_DWORD	Value 2 Name: NextInstance Type: REG_DWORD Data: 0x1
C:\WINDOWS\system32\inetsrv\iisw3adm.dll			Data: 0xc32	Data: 0xc33	
Key Name:			Value 7	Name: First Counter	
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch			Type: REG_DWORD	Type: REG_DWORD	
Class Name: <NO CLASS>			Data: 0xc32	Data: 0xc33	
Last Write Time: 10/18/2007 - 3:19 PM			Value 8	Name: First Help	
Key Name:			Type: REG_DWORD	Type: REG_DWORD	
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory			Data: 0xc33	Data: 0xc33	
Class Name: <NO CLASS>			Value 9	Name: Object List	
Last Write Time: 10/18/2007 - 3:19 PM			Type: REG_SZ	Type: REG_SZ	
Key Name:			Data: 3122 3296	Data: 3122 3296	
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDServer.DataFactory			Value 10	Name: Library Validation Code	
Class Name: <NO CLASS>			Type: REG_BINARY	Type: REG_BINARY	
Last Write Time: 10/18/2007 - 3:19 PM			Data: 00000000 00 e0 78 25 c4 11 c8 01 - 00 5e 00 00 00 00 00 00 .àx\$Å.È..^.....	Data: 00000000 00 e0 78 25 c4 11 c8 01 - 00 5e 00 00 00 00 00 00 .àx\$Å.È..^.....	
Key Name:			Value 0	Name: Security	
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security			Type: REG_BINARY	Type: REG_BINARY	
Class Name: <NO CLASS>			Data: 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14 00 00 00À.....	Data: 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14 00 00 00À.....	
Last Write Time: 10/18/2007 - 3:19 PM			Value 1	Name: Security	
Value 0			Type: REG_BINARY	Type: REG_BINARY	
Name: Library	Type: REG_SZ	Data:	Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	
C:\WINDOWS\system32\inetsrv\w3ctrsl.dll			Value 2	Name: Security	
Value 1			Type: REG_BINARY	Type: REG_BINARY	
Name: Open	Type: REG_SZ	Data: OpenW3PerformanceData	Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	
Value 2			Value 3	Name: Collect	
Name: Close	Type: REG_SZ	Data: CloseW3PerformanceData	Type: REG_SZ	Type: REG_SZ	
C:\WINDOWS\system32\inetsrv\w3ctrsl.dll			Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	
Value 3			Name: Collect	Type: REG_SZ	
Name: Collect	Type: REG_SZ	Data: CollectW3PerformanceData	Type: REG_SZ	Type: REG_SZ	
C:\WINDOWS\system32\inetsrv\w3ctrsl.dll			Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	
Value 4			Name: PerfIniFile	Type: REG_SZ	
Name: PerfIniFile	Type: REG_SZ	Data:	Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	Data: 00000000 00000010 30 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd 01 02 00ý... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d 01 02 00	

Name:	MaxConnections
Type:	REG_DWORD
Data:	0xc350
Value 3	
Name:	MaxPendingDeliveries
Type:	REG_DWORD
Data:	0x7d0
Value 4	
Name:	DB_Protocol
Type:	REG_SZ
Data:	ODBC
Value 5	
Name:	TxnMonitor
Type:	REG_SZ
Data:	COM
Value 6	
Name:	DbServer
Type:	REG_SZ
Data:	b2
Value 7	
Name:	DbName
Type:	REG_SZ
Data:	tpcc
Value 8	
Name:	DbUser
Type:	REG_SZ
Data:	sa
Value 9	
Name:	DbPassword
Type:	REG_SZ
Data:	
Value 10	
Name:	COM_SinglePool
Type:	REG_SZ
Data:	YES
Value 11	
Name:	CallNoDuplicatesNewOrder
Type:	REG_DWORD
Data:	0x1
Value 12	
Name:	ConnectDelay
Type:	REG_DWORD
Data:	0x1

Profile: b2_46176_16c1
File Path: C:\Program
Files\BenchCraft\b2_46176_16c1.xml
Version: 5
Number of Engines: 48
Name: d2
Description:
Directory: c:\blog\rte2.log
Machine: n31
Parameter Set: 2.2
Index: 1600000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER53164609
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:
Name: d3
Description:
Directory: c:\blog\rte3.log
Machine: n31
Parameter Set: 2.2
Index: 750000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER44265281
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:
Name: d4
Description:
Directory: c:\blog\rte4.log
Machine: n32
Parameter Set: 2.2
Index: 400000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER5346413218
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:
Name: d5
Description:
Directory: c:\blog\rte5.log
Machine: n32
Parameter Set: 2.2
Index: 500000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER62226046
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:
Name: d6
Description:
Directory: c:\blog\rte6.log
Machine: n32
Parameter Set: 2.2
Index: 600000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER72289718
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Parameter Set: 2.2
Index: 300000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER4439706187
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:
Name: d7
Description:
Directory: c:\blog\rte7.log
Machine: n33
Parameter Set: 2.2
Index: 4678
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER72289718
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0

Benchcraft Profile

Additional Options:
Name: d8
Description:
Directory: c:\blog\rte8.log
Machine: n33
Parameter Set: 2.2
Index: 220000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER82325578
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:
Name: d9
Description:
Directory: c:\blog\rte9.log
Machine: n33
Parameter Set: 2.2
Index: 800000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER92360187
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:
Name: d10
Description:
Directory: c:\blog\rte10.log
Machine: n34
Parameter Set: 2.2
Index: 900000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER102399796
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:
Name: d11
Description:
Directory: c:\blog\rte11.log
Machine: n34
Parameter Set: 2.2
Index: 1000000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER1122682203

Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:
Name: d12
Description:
Directory: c:\blog\rte12.log
Machine: n34
Parameter Set: 2.2
Index: 1100000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER1222731546
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:
Name: d13
Description:
Directory: c:\blog\rte13.log
Machine: n35
Parameter Set: 2.2
Index: 1200000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER13-1439076421
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:
Name: d14
Description:
Directory: c:\blog\rte14.log
Machine: n35
Parameter Set: 2.2
Index: 1300000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER14-1438943656
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:
Name: d15
Description:
Directory: c:\blog\rte15.log

Machine: n35
Parameter Set: 2.2
Index: 1400000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER15-1438852265
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:
Name: d16
Description:
Directory: c:\blog\rte16.log
Machine: n36
Parameter Set: 2.2
Index: 1500000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER16-1438790906
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:
Name: d17
Description:
Directory: c:\blog\rte17.log
Machine: n36
Parameter Set: 2.2
Index: 215000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER17-57150250
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:
Name: d18
Description:
Directory: c:\blog\rte18.log
Machine: n36
Parameter Set: 2.2
Index: 1700000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER18-57076468
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25

```

CPU: 2
Additional Options:

Name: d19
Description:
Directory: c:\blog\rte19.log
Machine: n37
Parameter Set: 2.2
Index: 180000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER19-57030562
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: d20
Description:
Directory: c:\blog\rte20.log
Machine: n37
Parameter Set: 2.2
Index: 190000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER20-56992625
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d21
Description:
Directory: c:\blog\rte21.log
Machine: n37
Parameter Set: 2.2
Index: 2700000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER2191781
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Name: d22
Description:
Directory: c:\blog\rte22.log
Machine: n38
Parameter Set: 2.2
Index: 210000000
Seed: 4678
Configured Users: 9620

```

```

Pipe Name: DRIVER221814250
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: d23
Description:
Directory: c:\blog\rte23.log
Machine: n38
Parameter Set: 2.2
Index: 30000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER231877968
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d24
Description:
Directory: c:\blog\rte24.log
Machine: n38
Parameter Set: 2.2
Index: 40000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER242206343
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Name: d25
Description:
Directory: c:\blog\rte25.log
Machine: n39
Parameter Set: 2.2
Index: 50000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER252251500
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: d26
Description:

```

```

Directory: c:\blog\rte26.log
Machine: n39
Parameter Set: 2.2
Index: 60000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER262289250
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d27
Description:
Directory: c:\blog\rte27.log
Machine: n39
Parameter Set: 2.2
Index: 70000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER272340437
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Name: d28
Description:
Directory: c:\blog\rte28.log
Machine: n41
Parameter Set: 2.2
Index: 80000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER282382234
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: d29
Description:
Directory: c:\blog\rte29.log
Machine: n41
Parameter Set: 2.2
Index: 90000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER292416328
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0

```

```

CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d30
Description:
Directory: c:\blog\rte30.log
Machine: n41
Parameter Set: 2.2
Index: 100000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER302463687
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Name: d31
Description:
Directory: c:\blog\rte31.log
Machine: n42
Parameter Set: 2.2
Index: 25500000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER3155814328
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: d32
Description:
Directory: c:\blog\rte32.log
Machine: n42
Parameter Set: 2.2
Index: 35500000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER3255892765
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d33
Description:
Directory: c:\blog\rte33.log
Machine: n42
Parameter Set: 2.2
Index: 45500000
Seed: 4678

```

```

Configured Users: 9620
Pipe Name: DRIVER3355948500
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Name: d34
Description:
Directory: c:\blog\rte34.log
Machine: n43
Parameter Set: 2.2
Index: 55500000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER3455990593
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: d35
Description:
Directory: c:\blog\rte35.log
Machine: n43
Parameter Set: 2.2
Index: 65500000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER3556027390
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d36
Description:
Directory: c:\blog\rte36.log
Machine: n43
Parameter Set: 2.2
Index: 75500000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER3656077062
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Name: d37

```

```

Description:
Directory: c:\blog\rte37.log
Machine: n27
Parameter Set: 2.2
Index: 2105000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER37766536203
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: d38
Description:
Directory: c:\blog\rte38.log
Machine: n27
Parameter Set: 2.2
Index: 2050000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER38766654375
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d39
Description:
Directory: c:\blog\rte39.log
Machine: n27
Parameter Set: 2.2
Index: 1905000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER39766760968
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Name: d40
Description:
Directory: c:\blog\rte40.log
Machine: n28
Parameter Set: 2.2
Index: 705000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER40766820328
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0

```

```

Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d41
Description:
Directory: c:\blog\rte38.log
Machine: n28
Parameter Set: 2.2
Index: 1805000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER41766909890
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d42
Description:
Directory: c:\blog\rte42.log
Machine: n28
Parameter Set: 2.2
Index: 1705000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER42766941343
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Name: d43
Description:
Directory: c:\blog\rte43.log
Machine: n29
Parameter Set: 2.2
Index: 1605000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER43766990906
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: d44
Description:
Directory: c:\blog\rte44.log
Machine: n29
Parameter Set: 2.2
Index: 1505000000

```

```

Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER44767023437
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: d45
Description:
Directory: c:\blog\rte45.log
Machine: n29
Parameter Set: 2.2
Index: 1105000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER45767085000
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Name: d46
Description:
Directory: c:\blog\rte46.log
Machine: n30
Parameter Set: 2.2
Index: 1050000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER46767120687
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: d47
Description:
Directory: c:\blog\rte47.log
Machine: n30
Parameter Set: 2.2
Index: 905000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER47767168296
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

```

```

Name: d48
Description:
Directory: c:\blog\rte48.log
Machine: n30
Parameter Set: 2.2
Index: 805000000
Seed: 4678
Configured Users: 9620
Pipe Name: DRIVER48767212015
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 2
Additional Options:

Number of User groups: 48
Driver Engine: d1
IIS Server: cr121
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1 - 962
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d2
IIS Server: cr121
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 963 - 1924
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d3
IIS Server: cr121
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1925 - 2886
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d4

```

```
IIS Server: cr122
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2887 - 3848
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d5
IIS Server: cr122
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3849 - 4810
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d6
IIS Server: cr122
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 4811 - 5772
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d7
IIS Server: cr123
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 5773 - 6734
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d8
IIS Server: cr123
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 6735 - 7696
```

```
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d9
IIS Server: cr123
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 7697 - 8658
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d10
IIS Server: cr124
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 8659 - 9620
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d11
IIS Server: cr124
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 9621 - 10582
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d12
IIS Server: cr124
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 10583 - 11544
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No
```

```
Driver Engine: d13
IIS Server: cr125
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 11545 - 12506
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d14
IIS Server: cr125
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 12507 - 13468
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d15
IIS Server: cr125
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 13469 - 14430
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d16
IIS Server: cr126
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 14431 - 15392
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d17
IIS Server: cr126
SQL Server: b2
Database: tpcc
User: sa
```

Protocol: HTML
w_id Range: 15393 - 16354
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d18
IIS Server: cr126
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 16355 - 17316
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d19
IIS Server: cr127
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 17317 - 18278
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d20
IIS Server: cr127
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 18279 - 19240
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d21
IIS Server: cr127
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 19241 - 20202
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620

District id: 1
Scale Down: No

Driver Engine: d22
IIS Server: cr128
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 20203 - 21164
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d23
IIS Server: cr128
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 21165 - 22126
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d24
IIS Server: cr128
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 22127 - 23088
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d25
IIS Server: cr129
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 23089 - 24050
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d26
IIS Server: cr129
SQL Server: b2

Database: tpcc
User: sa
Protocol: HTML
w_id Range: 24051 - 25012
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d27
IIS Server: cr129
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 25013 - 25974
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d28
IIS Server: cr130
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 25975 - 26936
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d29
IIS Server: cr130
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 26937 - 27898
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d30
IIS Server: cr130
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 27899 - 28860
w_id Min Warehouse: 1
w_id Max Warehouse: 46176

```

Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d31
IIS Server: cr131
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 28861 - 29822
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d32
IIS Server: cr131
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 29823 - 30784
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d33
IIS Server: cr131
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 30785 - 31746
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d34
IIS Server: cr132
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 31747 - 32708
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d35

```

```

IIS Server: cr132
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 32709 - 33670
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d36
IIS Server: cr132
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 33671 - 34632
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d37
IIS Server: cr77
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 34633 - 35594
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d38
IIS Server: cr77
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 35595 - 36556
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d39
IIS Server: cr77
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 36557 - 37518

```

```

w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d40
IIS Server: cr78
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 37519 - 38480
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d41
IIS Server: cr78
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 38481 - 39442
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d42
IIS Server: cr78
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 39443 - 40404
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

Driver Engine: d43
IIS Server: cr79
SQL Server: b2
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 40405 - 41366
w_id Min Warehouse: 1
w_id Max Warehouse: 46176
Scale: Normal
User Count: 9620
District id: 1
Scale Down: No

```

Driver Engine: d44 IIS Server: cr79 SQL Server: b2 Database: tpcc User: sa Protocol: HTML w_id Range: 41367 - 42328 w_id Min Warehouse: 1 w_id Max Warehouse: 46176 Scale: Normal User Count: 9620 District id: 1 Scale Down: No	Protocol: HTML w_id Range: 45215 - 46176 w_id Min Warehouse: 1 w_id Max Warehouse: 46176 Scale: Normal User Count: 9620 District id: 1 Scale Down: No										95%									
	Number of Parameter Sets: 67										Txn Think									
	~Default Default Parameter Set										Key RT RT Menu Weight Time									
	Txn Think										Time Delay Fence Delay New Order Weight Time									
	13.00	18.01	0.10	5.00	44.75						13.00	3.01	0.10	5.00	43.10					
	13.00	3.01	0.10	5.00	0.10						6.00	2.01	0.10	5.00	0.10					
	6.00	2.01	0.10	5.00	4.05						6.00	2.01	0.10	20.00	0.10					
	6.00	2.01	0.10	5.00	4.05						11.00	2.01	0.10	5.00	0.10					
	90%										Txn Think									
	Key RT RT Menu Weight Time										Time Delay Fence Delay New Order Weight Time									
Driver Engine: d45 IIS Server: cr79 SQL Server: b2 Database: tpcc User: sa Protocol: HTML w_id Range: 42329 - 43290 w_id Min Warehouse: 1 w_id Max Warehouse: 46176 Scale: Normal User Count: 9620 District id: 1 Scale Down: No	12.05 18.01 0.10 5.00 10.00										12.05 3.01 0.10 5.00 0.10									
	12.05 3.01 0.10 5.00 10.00										5.05 2.01 0.10 5.00 0.10									
	5.05 2.01 0.10 5.00 0.10										5.05 2.01 0.10 20.00 0.10									
	5.05 2.01 0.10 20.00 0.10										10.05 2.01 0.10 5.00 0.10									
	Tuned Distribution										Key RT RT Menu Weight Time									
	9.00 2.01 0.10 5.00 0.10										9.00 2.01 0.10 20.00 0.10									
	9.00 2.01 0.10 20.00 0.10										14.00 2.01 0.10 5.00 0.10									
	3.0										Key RT RT Menu Weight Time									
	Time Delay Fence Delay New Order Weight Time										Time Delay Fence Delay New Order Weight Time									
Driver Engine: d46 IIS Server: cr80 SQL Server: b2 Database: tpcc User: sa Protocol: HTML w_id Range: 43291 - 44252 w_id Min Warehouse: 1 w_id Max Warehouse: 46176 Scale: Normal User Count: 9620 District id: 1 Scale Down: No	12.05 18.01 0.10 5.00 44.75										12.05 3.01 0.10 5.00 0.10									
	12.05 3.01 0.10 5.00 0.10										5.05 2.01 0.10 5.00 0.10									
	5.05 2.01 0.10 5.00 0.10										5.05 2.01 0.10 20.00 0.10									
	5.05 2.01 0.10 20.00 0.10										10.05 2.01 0.10 5.00 0.10									
	No Think										Key RT RT Menu Weight Time									
	15.15 0.00 0.10 5.00 0.10										15.15 0.00 0.10 20.00 0.10									
	15.15 0.00 0.10 20.00 0.10										30.15 0.00 0.10 5.00 0.10									
	4.0										Key RT RT Menu Weight Time									
	4.0 tt										Time Delay Fence Delay New Order Weight Time									
Driver Engine: d48 IIS Server: cr80 SQL Server: b2 Database: tpcc User: sa Protocol: HTML w_id Range: 44253 - 45214 w_id Min Warehouse: 1 w_id Max Warehouse: 46176 Scale: Normal User Count: 9620 District id: 1 Scale Down: No	0.00 0.00 0.00 5.00 10.00										0.00 0.00 0.00 5.00 10.00									
	0.00 0.00 0.00 5.00 0.00										0.00 0.00 0.00 5.00 0.00									
	0.00 0.00 0.00 5.00 0.00										0.00 0.00 0.00 5.00 0.00									
	0.00 0.00 0.00 5.00 0.00										48.20 18.01 0.10 5.00 0.10									
C73										48.20 3.01 0.10 5.00 0.10										

				Delivery		4.05				Order Status		4.05			
Key	RT	RT	Menu	Weight	Time	Time	Delay	Fence	Delay	Weight	Time	Time	Delay	Fence	Delay
20.20	2.01	0.10	5.00	0.10		38.50	18.01	0.10	5.00	0.10		24.10	2.01	0.10	5.00
20.20	2.01	0.10	20.00	0.10		38.50	3.01	0.10	5.00	0.10			2.2		
40.20	2.01	0.10	5.00	0.10		16.10	2.01	0.10	5.00	0.10			2.2 tt		
		3.8				16.10	2.01	0.10	20.00	0.10			Txn		Think
		3.8 tt				16.10	2.01	0.10	5.00	0.10					
			Txn		Think	32.10	2.01	0.10	5.00	0.10					
				Weight	Time										
Time	Delay	Fence	Delay												
				New Order	44.75										
45.70	18.01	0.10	5.00	0.10											
				Payment	43.10										
45.70	3.01	0.10	5.00	0.10											
				Delivery	4.05										
19.10	2.01	0.10	5.00	0.10											
				Stock Level	4.05										
19.10	2.01	0.10	20.00	0.10											
				Order Status	4.05										
38.10	2.01	0.10	5.00	0.10											
		3.6													
		3.6 tt													
			Txn		Think										
				Weight	Time										
Key	RT	RT	Menu												
Time	Delay	Fence	Delay												
				New Order	44.75										
43.30	18.01	0.10	5.00	0.10											
				Payment	43.10										
43.30	3.01	0.10	5.00	0.10											
				Delivery	4.05										
18.10	2.01	0.10	5.00	0.10											
				Stock Level	4.05										
18.10	2.01	0.10	20.00	0.10											
				Order Status	4.05										
36.18	2.01	0.10	5.00	0.10											
		3.4													
		3.4 tt													
			Txn		Think										
				Weight	Time										
Key	RT	RT	Menu												
Time	Delay	Fence	Delay												
				New Order	44.75										
40.90	18.01	0.10	5.00	0.10											
				Payment	43.10										
40.90	3.01	0.10	5.00	0.10											
				Delivery	4.05										
17.10	2.01	0.10	5.00	0.10											
				Stock Level	4.05										
17.10	2.01	0.10	20.00	0.10											
				Order Status	4.05										
17.10	2.01	0.10	5.00	0.10											
		3.2													
		3.2 tt													
			Txn		Think										
				Weight	Time										
Key	RT	RT	Menu												
Time	Delay	Fence	Delay												
				New Order	44.75										
54.20	18.01	0.10	5.00	0.10											

Weight Time				Order Status 4.04				Payment 43.05					
Time	Delay	Fence	Delay	10.15	2.01	0.10	5.00	0.10	12.11	3.01	0.10	5.00	0.10
12.53	18.01	0.10	5.00	44.83					5.07	2.01	0.10	5.00	4.01
		Payment		43.05					5.07	2.01	0.10	5.00	0.10
12.53	3.01	0.10	5.00	0.10					5.07	2.01	0.10	20.00	4.03
	Delivery			4.04					10.10	2.01	0.10	5.00	0.10
5.25	2.01	0.10	5.00	0.10									
	Stock Level			4.04									
5.25	2.01	0.10	20.00	0.10									
	Order Status			4.04									
10.45	2.01	0.10	5.00	0.10									
				1.03									
				1.03 tt									
					Txn	Think							
Key	RT	RT	Menu										
					Weight	Time							
Time	Delay	Fence	Delay	New Order	44.83								
12.41	18.01	0.10	5.00	0.10									
		Payment		43.05									
12.41	3.01	0.10	5.00	0.10									
	Delivery			4.04									
5.20	2.01	0.10	5.00	0.10									
	Stock Level			4.04									
5.20	2.01	0.10	20.00	0.10									
	Order Status			4.04									
10.35	2.01	0.10	5.00	0.10									
				1.02									
				1.02 tt									
					Txn	Think							
Key	RT	RT	Menu										
					Weight	Time							
Time	Delay	Fence	Delay	New Order	44.83								
12.29	18.01	0.10	5.00	0.10									
		Payment		43.05									
12.29	3.01	0.10	5.00	0.10									
	Delivery			4.04									
5.15	2.01	0.10	5.00	0.10									
	Stock Level			4.04									
5.15	2.01	0.10	20.00	0.10									
	Order Status			4.04									
10.25	2.01	0.10	5.00	0.10									
				1.01									
				1.01 tt									
					Txn	Think							
Key	RT	RT	Menu										
					Weight	Time							
Time	Delay	Fence	Delay	New Order	44.83								
12.17	18.01	0.10	5.00	0.10									
		Payment		43.05									
12.17	3.01	0.10	5.00	0.10									
	Delivery			4.04									
5.10	2.01	0.10	5.00	0.10									
	Stock Level			4.04									
5.10	2.01	0.10	20.00	0.10									
	Order Status			4.04									
				1.01									
				1.01 tt									
					Txn	Think							
Key	RT	RT	Menu										
					Weight	Time							
Time	Delay	Fence	Delay	New Order	44.83								
12.11	18.01	0.10	5.00	0.10									
		Payment		43.05									
				1.005 best									
				1.005 tt best									
					Txn	Think							
Key	RT	RT	Menu										
					Weight	Time							
Time	Delay	Fence	Delay	New Order	44.88								
12.11	18.01	0.10	5.00	0.10									
		Payment		43.02									
12.11	3.01	0.10	5.00	0.10									
	Delivery			4.03									
5.07	2.01	0.10	5.00	0.10									
	Stock Level			4.03									
5.07	2.01	0.10	20.00	0.10									
	Order Status			4.03									
				1.02 better									
				1.02 tt more aggressive									
					Txn	Think							
Key	RT	RT	Menu										
					Weight	Time							
Time	Delay	Fence	Delay	New Order	44.92								
12.29	18.01	0.10	5.00	0.10									
		Payment		43.01									
12.29	3.01	0.10	5.00	0.10									
	Delivery			4.02									
5.15	2.01	0.10	5.00	0.10									
	Stock Level			4.02									
5.15	2.01	0.10	20.00	0.10									
	Order Status			4.02									
				1.01 best									
				1.01 tt best									
					Txn	Think							
Key	RT	RT	Menu										
					Weight	Time							
Time	Delay	Fence	Delay	New Order	44.90								
12.17	18.01	0.10	5.00	0.10									
		Payment		43.05									
12.17	3.01	0.10	5.00	0.10									
	Delivery			4.01									
5.10	2.01	0.10	5.00	0.10									
	Stock Level			4.01									
5.10	2.01	0.10	20.00	0.10									
	Order Status			4.01									
				1.03 best									
				1.03 tt best									
					Txn	Think							
Key	RT	RT	Menu										
					Weight	Time							
Time	Delay	Fence	Delay	New Order	44.96								
12.29	18.01	0.00	5.00	0.00									
		Payment		43.00									
12.29	3.01	0.00	5.00	0.00									
	Delivery			4.00									
5.15	2.01	0.00	5.00	0.00									
	Stock Level			4.03									
5.15	2.01	0.00	20.00	0.00									
	Order Status			4.01									
				1.03 best									
				1.03 tt best									
					Txn	Think							
Key	RT	RT	Menu										
					Weight	Time							
Time	Delay	Fence	Delay	New Order	44.90								
12.11	18.01	0.10	5.00	0.10									
		Payment		43.00									
12.11	3.01	0.10	5.00	0.10									
	Delivery			4.00									
5.10	2.01	0.10	20.00	0.10									
	Stock Level			4.00									
5.10	2.01	0.10	5.00	0.10									
	Order Status			4.00									
				1.03 best									
				1.03 tt best									
					Txn	Think							

Key	RT	RT	Menu	Txn	Think	Stock Level	4.04	New Order	44.83	
				Weight	Time			Order Status		0.10
Time	Delay	Fence	Delay	New Order	44.96	66.33	2.01	0.10	5.00	0.10
12.41	18.01	0.10	5.00	0.10	44.96	33.33	2.01	0.10	20.00	0.10
				Payment	43.01	66.33	2.01	0.10	5.00	0.10
12.41	3.01	0.10	5.00	0.10				7.0		
				Delivery	4.01			7.0 tt		
5.20	2.01	0.10	5.00	0.10						
				Stock Level	4.01					
5.20	2.01	0.10	20.00	0.10						
				Order Status	4.01					
10.35	2.01	0.10	5.00	0.10						
					5.5					
					5.5 tt					
Key	RT	RT	Menu	Txn	Think	Stock Level	4.04	New Order	44.83	
				Weight	Time			Order Status		0.10
Time	Delay	Fence	Delay	New Order	44.83	84.35	18.01	0.10	5.00	0.10
66.28	18.01	0.10	5.00	0.10	44.83	84.35	3.01	0.10	5.00	0.10
				Payment	43.05	84.35	3.01	0.10	20.00	0.10
66.28	3.01	0.10	5.00	0.10						
				Delivery	4.04					
27.77	2.01	0.10	5.00	0.10						
				Stock Level	4.04					
27.77	2.01	0.10	20.00	0.10						
				Order Status	4.04					
55.27	2.01	0.10	5.00	0.10						
					6.0					
					6.0 tt					
Key	RT	RT	Menu	Txn	Think	Stock Level	4.04	New Order	44.83	
				Weight	Time			Order Status		0.10
Time	Delay	Fence	Delay	New Order	44.83	70.35	2.01	0.10	5.00	0.10
72.30	18.01	0.10	5.00	0.10	44.83	70.35				
				Payment	43.05					
72.30	3.01	0.10	5.00	0.10						
				Delivery	4.04					
30.30	2.01	0.10	5.00	0.10						
				Stock Level	4.04					
30.30	2.01	0.10	20.00	0.10						
				Order Status	4.04					
60.30	2.01	0.10	5.00	0.10						
					6.5					
					6.5 tt					
Key	RT	RT	Menu	Txn	Think	Stock Level	4.04	New Order	44.83	
				Weight	Time			Order Status		0.10
Time	Delay	Fence	Delay	New Order	44.83	90.38	18.01	0.10	5.00	0.10
79.53	18.01	0.10	5.00	0.10	44.83	90.38				
				Payment	43.05					
79.53	3.01	0.10	5.00	0.10						
				Delivery	4.04					
33.33	2.01	0.10	5.00	0.10						
Key	RT	RT	Menu	Txn	Think	Stock Level	4.04	New Order	44.83	
				Weight	Time			Order Status		0.10
Time	Delay	Fence	Delay	New Order	44.83	80.40	2.01	0.10	5.00	0.10
120.50	18.01	0.10	5.00	0.10	44.83	80.40				
				Payment	43.05					
				Delivery	4.04					
				Stock Level	4.04					
				Order Status	4.04					
Key	RT	RT	Menu	Txn	Think	Stock Level	4.04	New Order	44.83	
				Weight	Time			Order Status		0.10
Time	Delay	Fence	Delay	New Order	44.83	50.50	2.01	0.10	5.00	0.10
192.43	3.01	0.10	5.00	0.10	44.83	50.50				
				Payment	43.05					
				Delivery	4.04					
				Stock Level	4.04					
				Order Status	4.04					
Key	RT	RT	Menu	Txn	Think	Stock Level	4.04	New Order	44.83	
				Weight	Time			Order Status		0.10
Time	Delay	Fence	Delay	New Order	44.83	100.50	2.01	0.10	5.00	0.10
102.43	18.01	0.10	5.00	0.10	44.83	100.50				
				Payment	43.05					
				Delivery	4.04					
				Stock Level	4.04					
				Order Status	4.04					

1.02 better								
1.02 more aggressive								
Key	RT	RT	Menu	Txn		Think		
				Weight	Time	Weight	Time	
Time	Delay	Fence	Delay					
			New Order	44.92				
12.05	18.01	0.10	5.00	0.10				
			Payment	43.01				
12.05	3.01	0.10	5.00	0.10				
			Delivery	4.02				
5.05	2.01	0.10	5.00	0.10				
			Stock Level	4.03				
5.05	2.01	0.10	20.00	0.10				
			Order Status	4.02				
10.05	2.01	0.10	5.00	0.10				
			1.01 better					
			1.01 more aggressive					
Key	RT	RT	Menu	Txn		Think		
				Weight	Time	Weight	Time	
Time	Delay	Fence	Delay					
			New Order	44.92				
12.17	18.01	0.10	5.00	0.10				
			Payment	43.01				
12.17	3.01	0.10	5.00	0.10				
			Delivery	4.02				
5.10	2.01	0.10	5.00	0.10				
			Stock Level	4.03				
5.10	2.01	0.10	20.00	0.10				
			Order Status	4.02				
10.15	2.01	0.10	5.00	0.10				
			1.001 better					
			1.001 more aggressive					
Key	RT	RT	Menu	Txn		Think		
				Weight	Time	Weight	Time	
Time	Delay	Fence	Delay					
			New Order	44.92				
12.06	18.01	0.10	5.00	0.10				
			Payment	43.01				
12.06	3.01	0.10	5.00	0.10				
			Delivery	4.02				
5.06	2.01	0.10	5.00	0.10				
			Stock Level	4.03				
5.06	2.01	0.10	20.00	0.10				
			Order Status	4.02				
10.06	2.01	0.10	5.00	0.10				
			FullSpeed					
			1.000 tt					
Key	RT	RT	Menu	Txn		Think		
				Weight	Time	Weight	Time	
Time	Delay	Fence	Delay					
			New Order	44.91				
12.05	18.01	0.10	5.00	0.10				
			Payment	43.03				
12.05	3.01	0.10	5.00	0.10				

Delivery 4.02								
5.05	2.01	0.10	5.00	0.10				
			Stock Level	4.02				
5.05	2.01	0.10	20.00	0.10				
			Order Status	4.02				
10.05	2.01	0.10	5.00	0.10				
1.003 best								
1.003 best								
Key	RT	RT	Menu	Txn		Think		
				Weight	Time	Weight	Time	
Time	Delay	Fence	Delay					
			New Order	44.90				
12.09	18.01	0.10	5.00	0.10				
			Payment	43.05				
12.09	3.01	0.10	5.00	0.10				
			Delivery	4.01				
5.07	2.01	0.10	5.00	0.10				
			Stock Level	4.03				
5.07	2.01	0.10	20.00	0.10				
			Order Status	4.01				
10.08	2.01	0.10	5.00	0.10				
ExtraKick								
FullSpeedKick								
Key	RT	RT	Menu	Txn		Think		
				Weight	Time	Weight	Time	
Time	Delay	Fence	Delay					
			New Order	44.93				
12.03	18.01	0.10	5.00	0.10				
			Payment	43.01				
12.03	3.01	0.10	5.00	0.10				
			Delivery	4.02				
5.03	2.01	0.10	5.00	0.10				
			Stock Level	4.02				
5.03	2.01	0.10	20.00	0.10				
			Order Status	4.02				
10.03	2.01	0.10	5.00	0.10				

HP Specific Drivers

The following Microsoft Windows 2003 Server x64 device drivers were replaced with HP-specific device drivers:
The Microsoft HP Smart Array SAS Controller Controller default device driver (hpciss.SYS) was replaced with the HP Smart Array SAS Controller Non-miniport Performance Drivers for Microsoft Windows 2003 Server x64 (hpqciisb.sys and hpqciissd.sys).

Appendix D: 60-Day Space

TPC-C 60 Day Space Requirements						
Warehouses	46,176			TpmC	579,814	
Table	Rows	Data KB	Index KB	Extra 5% KB	8hr Space	Total Space KB
Warehouse	46,176	4,928	64	250		5,242
District	461,760	51,312	160	2,574		54,046
Customer	1,385,280,000	1,007,476,368	62,857,088	53,516,673		1,123,850,129
History	1,385,280,000	80,892,264	302,072		17,744,162	81,194,336
New_order	415,584,000	7,404,616	16,824	371,072		7,792,512
Orders	1,385,280,000	45,233,640	101,264		23,203,626	45,334,904
Order_line	13,852,756,594	908,377,488	2,139,168		326,260,040	910,516,656
Item	100,000	9,416	80	475		9,971
Stock	4,617,600,000	1,477,632,000	3,113,736	74,037,287		1,554,783,023
Total		3,527,082,032	68,530,456	127,928,330	367,207,829	3,723,540,818
		MB				
Dynamic Space	1,010,257	Sum of Data for Order, Orderline and History				
Static Space	2,626,013	Sum of Data+Index+5%+Dynamic Space				
Free Space	na	Total Allocated Spac - (Dynamic + Static Space)				
Daily Growth	202,966	(Dynamic Space/(W*62.5))*tpmc				
Daily Spread	-	(Free Space -1.5*Daily Growth) Zero Assumed				
60 Day Space MB	14,804,002	MB				
60 Day Space GB	14,457.03	GB				
Log Size	2,074,069.00	MB				
KB Per New Order	6.48	KB				
8 hr log MB	1,760,859	MB				
8 hr log GB	1,719.59	GB				
Space Usage	GB Needed	Disks Measured	GB Priced	Disk Size	Formatted Size	
60 Day Space DB	14,457	700	23,660.00	36GB	33.80	
			0.00			
			0.00			
Total DB			23,660.00			
8-hr log + mirror	3,439	30	4,101.00	146GB	136.70	
OS, Swap	3	2	67.60			
Total Storage	17,899.21	GB	27,828.60	GB		

MSSQL_stk_fg	MSSQL_cust_fg	MSSQL.ol_fg	MSSQL.misc_fg
			5,242
			54,046
	1,123,850,129		98,938,498
			7,792,512
			68,538,530
		1,236,776,696	9,971
	1,554,783,023		
1,554,783,023	1,123,850,129	1,236,776,696	175,338,799
files=	7	7	7
size=	35,776,000	26,816,000	29,438,720
Total=	250,432,000	187,712,000	206,071,040
8K blocks	2,003,456,000	1,501,696,000	1,648,568,320
	OK	OK	OK
			429,363,200
			OK

tpmC	579,814										
	Data Before KB	Index Before KB	Data After KB	Index After KB	Data Grow KB	Index Grow KB	Total Grow KB	KB/New-Order	8-Hr Growth KB	8-Hr Growth MB	
History	80,892,264	302,072	89,083,408	605,144	8,191,144	303,072	8,494,216	0.0638	17,744,162.01	17,328.28	
Order	45,233,640	101,264	56,240,080	202,512	11,006,440	101,248	11,107,688	0.0834	23,203,626.49	22,659.79	
Order-Line	908,377,488	2,139,168	1,062,417,032	4,281,880	154,039,544	2,142,712	156,182,256	1.1723	326,260,040.16	318,613.32	
										358,601.40	
	sum(*) Before		sum(*) After		Num New-Order						
d_next_o_id	1,385,741,760		1,518,970,445		133,228,685						
	Before MB		After MB		Grow MB			KB/New-Order	8-Hr Growth MB	8-Hr Growth GB	
Log	18,453.25		861,385.12		842,931.87			6.4788	1,760,859.35	1,719.59	
	2,074,069.00	0.88971245		41.53117				6,634.2930	bytes		
Database tpcc log used (%)											

Appendix E: Third Party Letters

7ft Gray Cat 6 Patch Cable, Molded
As low as 1.79 - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Refresh Search Favorites Home Mail Print Address http://www.deepsurplus.com/Network-Structured-Wiring/7-Foot-CAT-6-Patch-Cables/7ft-Gray-Cat-6-Patch-Cable-Molded&brfont-colorblackAs-low-as-1.75-font Go Links Sign Out

DeepSurplus

Surplus, Closeout & Overstocked Cabling Supplies

HOME Network Cabling & Structured Wiring Home Theater (Audio/Video) Computer Cabling & Accessories Speaker Parts, Amplifier Building Electronic Components / Hardware Shopping Cart My Account Checkout Company Info

Welcome Hewlett Packard
If you are not Hewlett Packard, click here to log in.

Network Cabling & Structured Wiring > Network Patch Cables > Ethernet CAT6 Network Patch Cables > Ethernet CAT 6 Patch Cables, 7ft >

Shopping Cart

- 0 Items in Cart 1
- 0 Current Total \$1.57
- [Estimate Shipping](#)
- [View Cart](#)

Search Go

Rated As One Of The Fastest-Growing Private Companies In America!

7ft Gray Cat 6 Patch Cable, Molded As low as 1.79



As low as 1.79" border=0>

P/N: CB242-7GY [Tell a Friend](#)

Condition: New
Mfg: Abergerry
P/N: CB242-7G

Other items you might enjoy:

Quantity Price

1 - 499	\$2.01
500 - 749	\$1.91
750 - 999	\$1.85
1000 +	\$1.79

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>



October 24, 2008

Hewlett-Packard Company
David Adams
20555 SH 249
MS 150402
Houston, TX 77040

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-03134	SQL Server 2005 Enterprise x64 Edition <i>Per Processor License</i> <i>Discount Schedule: Open Program - Level C</i> <i>Unit Price reflects a 6% discount from the retail unit price of \$24,999.</i>	\$23,432	4	\$93,728
P73-01972	Windows Server 2003 R2 Standard Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 28% discount from the retail unit price of \$999.</i>	\$719	16	\$11,504
P72-01684	Windows Server 2003 R2 Enterprise x64 Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 42% discount from the retail unit price of \$3,999.</i>	\$2,334	1	\$2,334
127-00012	Visual Studio Standard 2005 <i>Full License</i> <i>No Discount Applied</i>	\$250	1	\$250
N/A	Microsoft Problem Resolution Services <i>Professional Support (1 Incident)</i>	\$245	1	\$245

Windows Server 2008 and Windows Server 2003 are currently orderable through Microsoft's normal distribution channels. A list of Microsoft's resellers can be found at <http://www.microsoft.com/products/info/render.aspx?view=22&type=mnp&content=22/licensing>

SQL Server 2008 will be orderable and available by August 30, 2008.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PCdaad0810240000003985.

Please include this Reference ID in any correspondence regarding this price quote.

Appendix F: Price Verification

All components available at time of publication.

HP Direct: 800-203-6748

For price verification before order date: e-mail hp.pricing.desk@hp.com