

**TPC Benchmark™ C**  
**Full Disclosure Report**  
**for**  
**IBM® @server™ xSeries™ 360**  
**using**  
**Microsoft® SQL Server 2000, Enterprise Edition**  
**and**  
**Microsoft Windows® Server 2003, Enterprise Server**

**TPC-C Version 5.1**

**Submitted for Review**  
**February 28, 2003**



## **First Edition - February 2003**

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESSED OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by IBM for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

In this document, any references made to an IBM licensed program are not intended to state or imply that only IBM's licensed program may be used; any functionally equivalent program may be used.

This publication was produced in the United States. IBM may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change without notice. Consult your local IBM representative for information on products and services available in your area.

© Copyright International Business Machines Corporation 2003. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

U.S. Government Users - Documentation related to restricted rights: Use, duplication, or disclosure is subject to restrictions set forth in GSA ADP Schedule Contract with IBM Corp.

### ***Trademarks***

IBM, xSeries, and the e-business logo are trademarks or registered trademarks of International Business Machines Corporation.

The following terms used in this publication are trademarks of other companies as follows: TPC Benchmark, tpmC, and \$/tpmC trademark of Transaction Processing Performance Council; Intel and Pentium are registered trademarks of Intel Corporation; Microsoft, Windows and BenchCraft are trademarks or registered trademarks of Microsoft Corporation. Other company, product, or service names, which may be denoted by two asterisks (\*\*), may be trademarks or service marks of others.

### ***Notes***

<sup>1</sup> GHz only measures microprocessor internal clock speed, not application performance. Many factors affect application performance.

<sup>2</sup> When referring to hard disk capacity, GB, or gigabyte, means one thousand million bytes. Total user-accessible capacity may be less.

---

## Abstract

IBM Corporation conducted the TPC Benchmark™ C on the IBM @server xSeries 360 configured as a client/server system. This report documents the full disclosure information required by the TPC Benchmark™ C Standard Specification, Revision 5.1, including the methodology used to achieve the reported results. All testing fully complied with this revision level.

The software used on the xSeries 360 system includes Microsoft Windows Server 2003 Enterprise Server operating system and Microsoft SQL Server 2000 Enterprise Edition database.

Two standard metrics, transactions per minute-C (tpmC) and price per tpmC (\$/tpmC), are reported as required by the TPC Benchmark C Standard Specification.

The benchmark results are summarized in the following table.

Hardware	Software	Total System Cost	tpmC	\$/tpmC	Total Solution Availability Date
IBM @server xSeries 360	Microsoft SQL Server 2000 Enterprise Edition  Microsoft Windows Server 2003 Enterprise Server	\$226,504	52,587.46	\$4.31	April 30, 2003

The results of the benchmark and test methodology used were audited by Bradley J. Askins of InfoSizing, Inc. The auditor's attestation letter is contained in Section 9 of this report.




**IBM® @server™ xSeries™ 360 c/s**  
**with**  
**Microsoft® SQL Server 2000**

TPC-C Rev. 5.1

Report Date: Feb. 28, 2003

Total System Cost	TPC-C Throughput	Price/Performance	Availability Date
<b>\$226,504</b>	<b>52,587.46 tpmC</b>	<b>\$4.31 / tpmC</b>	<b>April 30, 2003</b>

Processors	Database Manager	Operating System	Other Software	Number of Users
Server: 4 Intel® Xeon™ Processor MP 2.0GHz Clients: 2 Intel Xeon DP 2.4GHz	Microsoft SQL Server 2000 Enterprise Edition	Microsoft Windows® Server 2003 Enterprise Server	Microsoft Visual C++ 6.0 Win32 Microsoft COM+	42,240

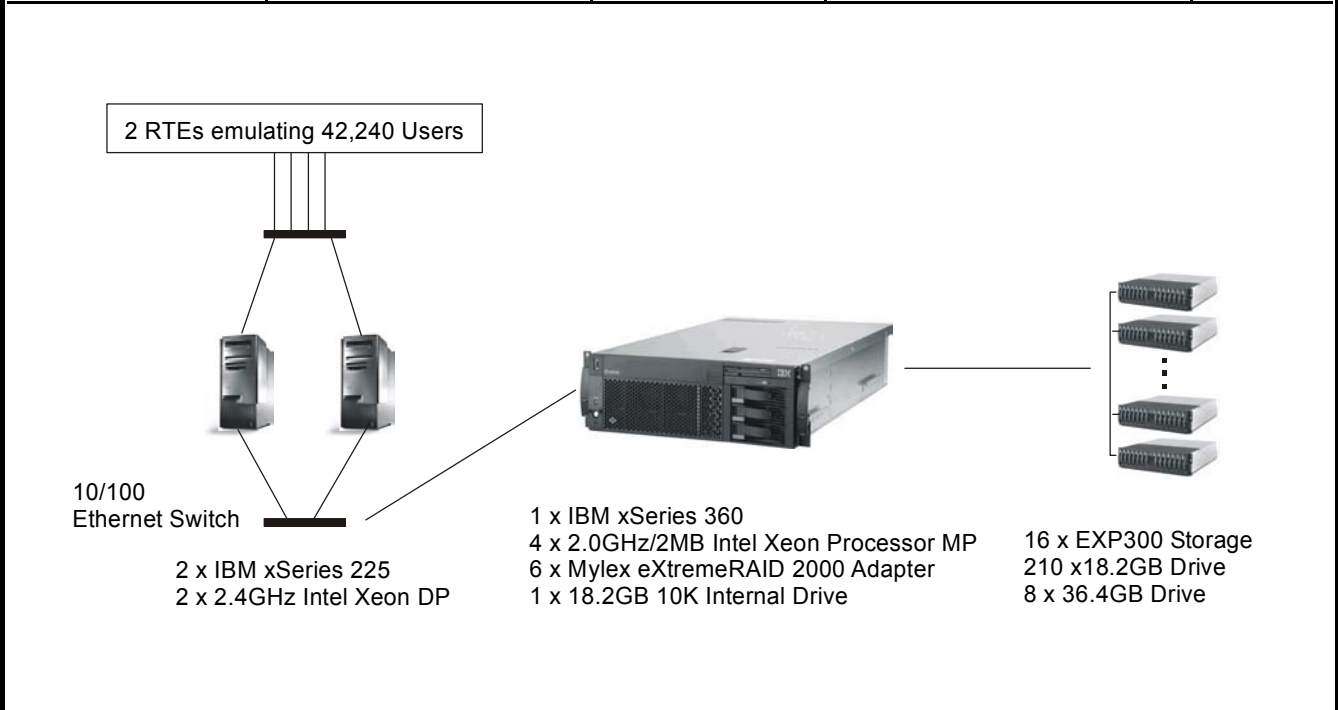

System Components	Qty	Server:	Qty	Each of Two Clients:
Processors / Cache	4	2.0GHz Xeon Processor MP w/2MB L3 Cache	1	2.4GHz Xeon Processor DP w/512KB L2 Cache
Memory	8	1GB ECC SDRAM	4	256MB
Disk Controllers	6	Mylex eXtremeRAID 2000 Adapter	1	Dual-Channel Ultra320 SCSI Interface
Disk Drives	210	18.2GB (10000 rpm)	1	18.2GB (10000 rpm)
Total GB of Storage	8	36.4GB (10000 rpm)		
Tape Drive	1	3843GB 20/40GB SCSI Tape Drive		

IBM Corporation	IBM @server xSeries 360 c/s with Microsoft SQL Server 2000			TPC-C Rev. 5.1				
	Report Date: Feb. 28, 2003							
Description	Order Number	Third-Party Brand	Pricing	Unit Price	Qty	Ext. Price	3-Yr. Maint.*	
<b>Server Hardware</b>								
xSeries 360* Two 2.0GHz/2MB Xeon MP Processor Embedded 10/100 Ethernet Interface	8686-9RX	IBM	1	\$15,799	1	\$15,799		
ServicePac for 24x7x4	30L9186						1,495	
1GB ECC DDR SDRAM RDIMM	33L3285	IBM	1	685	8	5,480	0	
2.0GHz/2MB Xeon Processor MP	19K4647	IBM	1	6,199	2	12,398	0	
Mylex eXtremeRAID 2000 Adapter***	08P3834	Mylex	2	1,217	8	9,736	0	
18.2GB 10K Ultra160 SCSI Drive	06P5754	IBM	1	275	1	275	0	
Netfinity 4.2M Ultra2 SCSI Cable	03K9311	IBM	1	105	19	1,995	0	
IBM UPS 500	33L3477	IBM	1	99	1	99	0	
E54 15" (13.8" Viewable) Color Monitor*	633147N	IBM	1	139	1	139	90	
20/40GB Internal SCSI Tape Drive	00N7991	IBM	1	769	1	769	0	
NetBAY11 Rack Cabinet	9306110	IBM	1	519	1	519	300	
NetBAY42 Standard Rack Cabinet	9306421	IBM	1	1,439	1	1,439	300	
<b>Storage Hardware</b>								
EXP300 Rack Storage Enclosure*	35311RU	IBM	1	3,179	16	50,864	3,200	
18.2GB 10K Ultra160 SCSI Drive	06P5754	IBM	1	275	210	57,750	0	
36.4GB 10K Ultra160 SCSI Drive	06P5755	IBM	1	299	8	2,392	0	
						<b>Subtotal</b>	<b>\$159,654</b>	<b>\$5,385</b>
<b>Server Software</b>								
Microsoft SQL Server 2000 EE	810-00846	Microsoft	3	16,541	4	\$66,164	\$0	
Microsoft Windows Server 2003 ES	N/A	Microsoft	3	2,699	1	2,699	0	
Database Server Support Package - 1 Year	PROPRORS16U01	Microsoft	3	1,950	3		5,850	
						<b>Subtotal</b>	<b>\$68,863</b>	<b>\$5,850</b>
<b>Client Hardware</b>								
xSeries 225* w/2.4GHz Xeon Processor DP Two 256MB ECC SDRAM RDIMM Embedded Gigabit Ethernet Interface	8647-3AX	IBM	1	1,269	2	\$2,538	\$1,496	
256MB ECC SDRAM RDIMM	33L5037	IBM	1	195	4	780	0	
18.2GB 10K Ultra160 SCSI Drive	06P5754	IBM	1	275	2	550	0	
IBM 10/100 Dual-Port Server Adapter	22P4901	IBM	1	209	4	836	0	
E54 15" (13.8" Viewable) Color Monitor*	633147N	IBM	1	139	2	278	180	
						<b>Subtotal</b>	<b>\$4,982</b>	<b>\$1,676</b>
<b>Client Software</b>								
Microsoft Windows 2000 Server with COM+	C11-00821	Microsoft	3	738	2	1,476	0	
Microsoft Visual C++ Professional 6.0 Win32	254-00170	Microsoft	3	109	1	109	0	
						<b>Subtotal</b>	<b>\$1,585</b>	<b>\$0</b>
<b>Network Components</b>								
10/100 Ethernet 8-Port Switch***	FS108NA		2	65	3	195	0	
						<b>Subtotal</b>	<b>\$195</b>	<b>\$0</b>
<b>See Microsoft quote for discount details.</b>								
<b>Large volume discount of 14% on IBM Hardware; prices will vary if purchased separately.</b>			1			(21,686)	\$0	
Notes: * The standard 3-year warranties on IBM hardware have been upgraded to 7x24, 4-hour response time coverage. *** 10% or minimum 2 spares are added in place of on-site service (products have a 5-year return-to-vendor-warranty). Pricing: 1 - IBM Corp.; 2 - Computer Giants; 3 - Microsoft Corp. Audited by Bradley J. Askins of InfoSizing, Inc.				<b>Three-Year Cost of Ownership:</b>		\$226,504		
				<b>tpmC Rating:</b>		52,587.46		
				<b>\$/tpmC:</b>		\$4.31		
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specification. If you find that stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.								

<b>Numerical Quantities Summary</b>			
<b>MQTh, Computed Maximum Qualified Throughput:</b> 52,587.46 tpmC			
<b>Response Times (in seconds)</b>	<b>90th Percentile</b>	<b>Average</b>	<b>Maximum</b>
New-Order	0.64	0.43	7.74
Payment	0.47	0.28	5.33
Order-Status	0.54	0.34	8.38
Delivery (Interactive)	0.38	0.20	0.85
Delivery (Deferred)	0.74	0.50	1.81
Stock-Level	3.50	1.82	5.21
Menu	0.38	0.20	1.52
<b>Response time delay added for emulated components:</b> 0.1 Seconds			
<b>Transaction Mix (in percent of total transactions)</b>			<b>Percent</b>
New-Order			44.86
Payment			43.02
Order-Status			4.03
Delivery			4.05
Stock-Level			4.04
<b>Keying/Think Times (in seconds)</b>	<b>Minimum</b>	<b>Average</b>	<b>Maximum</b>
New-Order	18.001 / 0.00	18.01 / 12.04	18.04 / 120.51
Payment	3.00 / 0.00	3.01 / 12.03	3.04 / 120.51
Order-Status	2.00 / 0.00	2.01 / 10.02	2.04 / 100.51
Delivery	2.00 / 0.00	2.01 / 5.04	2.03 / 50.51
Stock-Level	2.00 / 0.00	2.01 / 5.03	2.04 / 50.50
<b>Test Duration</b>			
Ramp-up time			29 minutes
Measurement interval			120 minutes
Number of checkpoints			4
Checkpoint interval			30 minutes
Number of transactions (all types) completed in measurement interval			14,636,124

## Table of Contents

<b>Abstract</b>	3
<b>Numerical Quantities Summary</b>	6
<b>Preface</b>	11
<b>General Items</b>	12
Application Code Disclosure and Definition Statements	12
Benchmark Sponsor	12
Parameter Settings	12
Configuration Diagrams	12
<b>Clause 1: Logical Database Design Related Items</b>	14
Table Definitions	14
Physical Organization of the Database	14
Insert and Delete Operations	14
Horizontal or Vertical Partitioning	14
Replication	14
Table Attributes	14
<b>Clause 2: Transaction and Terminal Profiles Related Items</b>	15
Random Number Generation	15
Screen Layout	15
Terminal Verification	15
Intelligent Terminals	15
Transaction Profiles	15
Deferred Delivery Mechanism	16
<b>Clause 3: Transaction and System Properties Related Items</b>	17
Atomicity Requirements	17
Consistency Requirements	17
Isolation Requirements	18
Durability Requirements	18
<b>Clause 4: Scaling and Database Population Related Items</b>	20
Cardinality of Tables	20
Distribution of Tables and Logs	20
Database Model Implemented	21
Partitions/Replications Mapping	21
60-Day Space Requirement	21
<b>Clause 5: Performance Metrics and Response Time Related Items</b>	22
Measured tpmC	22
Response Times	22
Keying/Think Times	22
Response Time Frequency Distribution Curves	23
Performance Curve for Response Time vs. Throughput	25
New Order Think Time Distribution	26
Throughput vs. Elapsed Time	26
Steady State Methodology	27
Work Performed during Steady State	27
Checkpoints	27
Measurement Interval	27
Transaction Mix	27
Percentage of Total Mix	28
Number of Checkpoints	28
<b>Clause 6: SUT, Driver and Communication Definition Related Items</b>	30
Description of RTE	30
Emulated Components	30
Benchmarked and Targeted System Configuration Diagrams	30
Network Configuration	30

Network Bandwidth .....	30
Operator Intervention .....	30
<b>Clause 7: Pricing Related Items</b> .....	31
Hardware and Software Components .....	31
Availability Date .....	31
Measured tpmC .....	31
Country-Specific Pricing .....	31
Usage Pricing .....	31
System Pricing .....	32
<b>Clause 9: Audit Related Items</b> .....	33
Auditor .....	33
Availability of the Full Disclosure Report .....	33
<i>Attestation letter</i> .....	34
<b>Appendix A: Source Code</b> .....	36
<i>client_utils.c</i> .....	36
<i>client_utils.h</i> .....	37
<i>dlldata.c</i> .....	38
<i>error.h</i> .....	38
<i>install.c</i> .....	40
<i>install.h</i> .....	48
<i>install.rc</i> .....	48
<i>install_com.cpp</i> .....	51
<i>license.txt</i> .....	53
<i>mon_client.c</i> .....	55
<i>mon_client.h</i> .....	58
<i>readregistry.cpp</i> .....	58
<i>readregistry.h</i> .....	59
<i>resource.h</i> .....	59
<i>resource_tpcc_rc.h</i> .....	60
<i>rtetime.h</i> .....	60
<i>spinlock.h</i> .....	60
<i>tpcc.cpp</i> .....	61
<i>tpcc.def</i> .....	84
<i>tpcc.h</i> .....	84
<i>tpcc.rc</i> .....	86
<i>tpcc_com.cpp</i> .....	87
<i>tpcc_com.h</i> .....	88
<i>tpcc_com_all.dsp</i> .....	89
<i>tpcc_com_ps.def</i> .....	91
<i>tpcc_com_ps.h</i> .....	91
<i>tpcc_com_ps.idl</i> .....	93
<i>tpcc_com_ps_i.c</i> .....	94
<i>tpcc_com_ps_p.c</i> .....	95
<i>tpcc_dblib.cpp</i> .....	115
<i>tpcc_dblib.h</i> .....	125
<i>tpcc_enc.cpp</i> .....	126
<i>tpcc_enc.h</i> .....	127
<i>tpcc_odbc.cpp</i> .....	128
<i>tpcc_odbc.h</i> .....	136
<i>tpcc_tux.cpp</i> .....	138
<i>tpcc_tux.h</i> .....	140
<i>trans.h</i> .....	141
<i>tuxapp.cpp</i> .....	142
<i>tuxapp.h</i> .....	146
<i>tuxmain.c</i> .....	146



<i>txn_base.h</i>	147
<i>txnlog.h</i>	147
<i>webclnt.dsp</i>	150
<i>webclnt.dsw</i>	151
Stored Procedures	152
<i>neword.sql</i>	152
<i>payment.sql</i>	155
<i>ordstat.sql</i>	156
<i>delivery.sql</i>	157
<i>stocklev.sql</i>	158
<i>version.sql</i>	158
<i>null-txn.sql</i>	159
<b>Appendix B: Database Design</b>	166
Database Build	166
<i>backup.sql</i>	166
<i>backupdev.sql</i>	166
<i>createdb.sql</i>	166
<i>dbopt1.sql</i>	167
<i>dbopt2.sql</i>	167
<i>idxcuscl.sql</i>	167
<i>idxcusnc.sql</i>	168
<i>idxdiscl.sql</i>	168
<i>idxitmcl.sql</i>	168
<i>idxnodcl.sql</i>	168
<i>idxodlcl.sql</i>	168
<i>idxordcl.sql</i>	169
<i>idxordnc.sql</i>	169
<i>idxstkcl.sql</i>	169
<i>idxwarcl.sql</i>	169
<i>removedb.sql</i>	170
<i>restore.sql</i>	170
<i>runsqlcfg.sql</i>	170
<i>sqlshutdown.sql</i>	170
<i>tables.sql</i>	170
<i>verify_tpccLoad.sql</i>	172
<i>version.sql</i>	173
Load Source Code	173
<i>getargs.c</i>	173
<i>random.c</i>	175
<i>strings.c</i>	176
<i>time.c</i>	179
<i>tpcc.h</i>	179
<i>tpccldr.c</i>	180
<i>tpccldr.mak</i>	204
<b>Appendix C: Tunable Parameters</b>	208
Microsoft Windows Server 2003 Enterprise Server	208
Microsoft SQL Server 2000 Startup Parameters	243
Microsoft SQL Server 2000 Configuration Parameters	243
Disk Controller Configuration Parameters	245
<i>Mylex eXtremeRAID 2000 Controller 0</i>	245
<i>Mylex eXtremeRAID 2000 Controller 1</i>	245
<i>Mylex eXtremeRAID 2000 Controller 2</i>	248
<i>Mylex eXtremeRAID 2000 Controller 3</i>	250
<i>Mylex eXtremeRAID 2000 Controller 4</i>	253
<i>Mylex eXtremeRAID 2000 Controller 5</i>	255

Microsoft Windows 2000 Server .....	257
<i>System Information Report for Client 1</i> .....	257
<i>Client Configuration Parameters</i> .....	278
RTE Input Parameters .....	279
<b>Appendix D: 60-Day Space</b> .....	287
<b>Appendix E: Third-Party Quotations</b> .....	288

---

## Preface

The TPC Benchmark™ C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specification Version 5.1.

The TPC describes this benchmark in Clause 0.1 of the specification as follows:

TPC Benchmark C is an On Line Transaction Processing (OLTP) workload. It is a mixture of read-only and update-intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a “business throughput” measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

---

## General Items

### Benchmark Sponsor

*A statement identifying the benchmark sponsor(s) and other participating companies must be provided.*

This benchmark was sponsored by International Business Machines Corporation.

### Application Code Disclosure and Definition Statements

*The application program (as defined in Clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input and output functions.*

Appendix A contains all source code implemented in this benchmark.

### Parameter Settings

*Settings must be provided for all customer-tunable parameters and options that have been changed from the defaults found in actual products, including but not limited to:*

- *Database tuning options*
- *Recovery/commit options*
- *Consistency/locking options*
- *Operating system and application configuration parameters.*
- *Compilation and linkage options and run-time optimizations used to create/install applications, OS, and/or databases.*

*This requirement can be satisfied by providing a full list of all parameters and options.*

Appendix C contains the tunable parameters for the database, the operating system, and the transaction monitor.

### Configuration Diagrams


*Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.*

The configuration diagrams for the tested and priced systems are provided on the following pages.

The Remote Terminal Emulator (RTE) used for these TPC Benchmark C tests is the Microsoft BenchCraft RTE. Under Version 5.1, the components of the configuration being emulated by the RTE are the workstations and the Ethernet hubs. Appendix C contains a listing of the RTE scripts and inputs used in the benchmark testing.

The measured configuration used two IBM xSeries 225 systems, each configured with one 2.4GHz Pentium III processor, as clients, which executed the terminal I/O and submitted transactions to COM+ servers, which were also running on the clients. These COM+ servers forwarded the transaction requests to the server, and returned the results to the RTE. Microsoft SQL Server 2000 Enterprise Edition was the DBMS executing on the server.

## Measured and Priced Configurations

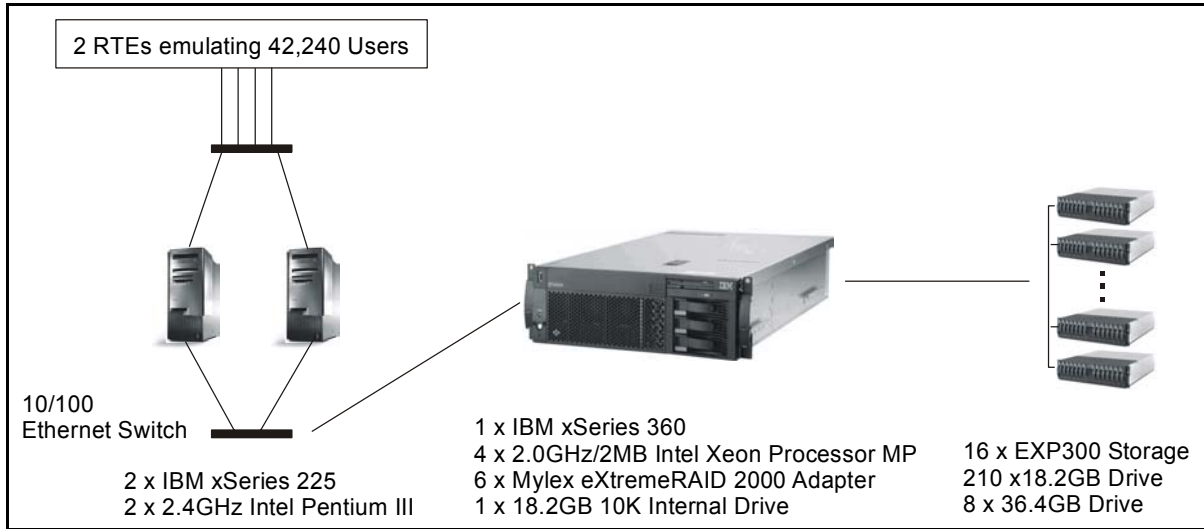

The measured and priced configurations were identical.

---

## Clause 1: Logical Database Design Related Items

### Table Definitions

*Listings must be provided for all table definition statements and all other statements used to set up the database. Appendix B contains the code used to define and load the database tables.*

### Physical Organization of the Database

*The physical organization of tables and indexes within the database must be disclosed. Physical space was allocated to Microsoft SQL Server on the server disks as detailed in Figure 4-2.*

### Insert and Delete Operations

*It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restriction in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the maximum key value for these new rows.*

All insert and delete functions were fully operational during the running of the benchmark. The space required for an additional 5 percent of the initial table cardinality was allocated to Microsoft SQL Server 2000 and priced as static space.

### Horizontal or Vertical Partitioning

*While there are few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark (see Clause 1.6), any such partitioning must be disclosed. Partitioning was not used in this benchmark.*

### Replication

*Replication tables, if used, must be disclosed (see Clause 1.4.6). Replication was not used in this benchmark.*

### Table Attributes

*Additional and/or duplicated attributes in any table must be disclosed, along with a statement on the impact on performance (see Clause 1.4.7). No additional attributes were used in this benchmark.*

---

## Clause 2: Transaction and Terminal Profiles Related Items

### Random Number Generation

*The method of verification for the random number generation must be disclosed.*

The seeds and offsets for the random number generator were collected and verified to be different for each driver. The auditor selected samples of the generated numbers from the database. The samples were verified to have no discernible patterns.

### Screen Layout

*The actual layouts of the terminal input/out screens must be disclosed.*

All screen layouts followed the TPC Benchmark C Standard Specification.

### Terminal Verification

*The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used must for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).*

The auditor verified terminal features by direct experimentation. The benchmarked configuration uses Microsoft Internet Explorer 5.0 and HTML scripts as the terminal interface.

### Intelligent Terminals

*Any usage of presentation managers or intelligent terminals must be explained.*

The terminals emulated in the priced configuration are IBM PC desktop computer systems. All processing of the input/output screens was handled by the xSeries 225 clients. The screen input/output was managed via HTML strings that comply with the HTML Version 2.0 specification. A listing of the code used to implement the intelligent terminals is provided in Appendix A. All data manipulation was handled by the xSeries 360 database server.

### Transaction Profiles

*The percentage of home and remote order-lines in the New-Order transactions must be disclosed.*

*The percentage of New-Order transactions that were rolled back as a result of an unused item number must be disclosed.*

*The number of items per orders entered by New-Order transactions must be disclosed. The percentage of home and remote Payment transactions must be disclosed. The percentage of Payment and Order-Status transactions that used non-primary key (C\_LAST) access to the database must be disclosed.*

*The percentage of Delivery transactions that were skipped as a result of an insufficient number of rows in the NEW-ORDER table must be disclosed.*

*The mix (i.e., percentages) of transaction types seen by the SUT must be disclosed.*

**Table 2-1. Transaction Statistics**

<b>New Order</b>	<b>Value (%)</b>
Home warehouse order lines	99.00
Remote warehouse order lines	1.00
Rolled back transactions	1.00
Average number of items per order	10.00
<b>Payment</b>	
Home warehouse payment transactions	85.06
Remote warehouse payment transactions	14.94
<b>Non-Primary Key Access</b>	
Payment transactions using C_LAST	60.00
Order-Status transactions using C_LAST	60.10
<b>Delivery</b>	
Delivery transactions skipped	0
<b>Transaction Mix</b>	
New-Order	44.86
Payment	43.02
Delivery	4.05
Stock Level	4.04
Order Status	4.03

## Deferred Delivery Mechanism

*The queuing mechanism used to defer execution of the Delivery transaction must be disclosed.*

The deferred delivery operation is queued by making an entry in an array within the application process (tpcc.dll) running on the client. Background threads within the application asynchronously process the queued delivery transactions.

The source code is listed in Appendix A.



---

## Clause 3: Transaction and System Properties Related Items

*The results of the ACID test must be disclosed, along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.*

### Atomicity Requirements

*The system under test must guarantee that database transactions are atomic; the system will either perform all individual operations on the data, or will assure that no partially completed operations leave any effects on the data.*

All ACID tests were conducted according to specification.

### Completed Transactions

The following steps were performed to verify the Atomicity of completed transactions.

1. The balance was retrieved from the CUSTOMER table for a random Customer, District and Warehouse, giving BALANCE\_1.
2. The Payment transaction was executed for the Customer, District and Warehouse used in step 1.
3. The balance was retrieved again for the Customer used in step 1 and step 2, giving BALANCE\_2. It was verified that BALANCE\_1 was greater than BALANCE\_2 by AMT.

### Aborted Transactions

The following steps were performed to verify the Atomicity of the aborted Payment transaction:

1. The Payment application code was changed to execute a rollback of the transaction instead of performing the commit.
2. Using the balance, BALANCE\_2, from the CUSTOMER table retrieved for the completed transaction, the Payment transaction was executed for the Customer, District and Warehouse used in step 1 of section 3.1.1. The transaction rolled back due to the change in the application code from step 1.
3. The balance was retrieved again for the Customer used for step 2, giving BALANCE\_3. It was verified that BALANCE\_2 was equal to BALANCE\_3.

### Consistency Requirements

*Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.*

Consistency conditions one through four were tested using a bat file to issue queries to the database. The results of the queries demonstrated that the database was consistent for all four tests.

## Isolation Requirements

*Sufficient conditions must be enabled at either the system or the application level to ensure that the required isolation defined in Clause 3.4.1 is obtained.*

Isolation tests one through seven were run using the bat files to issue queries to the database. Each file included timestamps to demonstrate the concurrency of operations. The results of the queries were captured and placed in files. The auditor reviewed the results and verified that the isolation requirements had been met.

In addition, the phantom tests and the stock-level tests were run and verified.

Case A was followed for Isolation test seven.

## Durability Requirements

*The tested system must guarantee durability: the ability to preserve the effects of committed transactions and ensure database consistency after recovery from any one of the failures listed in Clause 3.5.3.*

- *Permanent irrecoverable failure of any single durable medium containing TPC-C database tables or recovery log data (this test includes failure of all or part of memory)*
- *Instantaneous interruption (system crash/system hang) in processing that requires system reboot to recover*
- *Failure of all or part of memory (loss of contents)*

## Loss of Data Test

The following steps were successfully performed to pass the Durability test of failure of a disk unit with database tables:

1. The contents of the database were backed up to several database dump devices during the initial database load. There were no dump devices on the disk array from which a drive was removed as part of this test.
2. The current count of the total number of orders was determined by the sum of D\_NEXT\_O\_ID for all rows in the district table giving SUM1.
3. A test was started with 10 percent of the total users submitting transactions.
4. A disk containing a portion of each of the tables in the tpcc database was removed causing SQL Server to report errors accessing that device.
5. The run was aborted and SQL Server was restarted. Upon restart, the database tpcc reported numerous errors relating to the failed database device.
6. The transaction log was dumped to disk and the failed disk was replaced with a spare disk and was recovered.
7. The database was recovered and restored from the backup dump devices. Afterwards, the transaction log was applied to the database.
8. Step 2 was repeated to obtain the current count of the total number of orders giving SUM2.
9. It was verified that the sum of D\_NEXT\_O\_ID after the database is recovered is greater than or equal to the sum of D\_NEXT\_O\_ID before the run, plus all new order transactions completed during the run minus any rollback transactions.
10. Consistency Condition 3 was verified.

### ***Combined Loss of Log and Loss of System Test (Instantaneous Interruption and Loss of Memory)***

1. The current count of the total number of orders was determined by the sum of D\_NEXT\_O\_ID for all rows in the district table giving SUM1.
2. The test started with a full load with all users submitting transactions. A checkpoint was issued, and the system continued to run for another 5 minutes.
3. One of the log disk drives was removed. Since the log disk was mirrored, SQL Server continued to process transactions without interruption.
4. The test continued for another 3 minutes.
5. The server under test was powered off, which removed power from the system and the memory.
6. The server was powered on again.
7. SQL Server was started to initiate automatic recovery from its log.
8. Step 1 was repeated to obtain the current count of the total number of orders giving SUM2.
9. It was verified that the sum of D\_NEXT\_O\_ID after the database is recovered is greater than or equal to the sum of D\_NEXT\_O\_ID before the run, plus all new order transactions completed during the run minus any rollback transactions.

---

## Clause 4: Scaling and Database Population Related Items

### Cardinality of Tables

*The cardinality (e.g., the number of rows) of each table, as it existed at the start of the benchmark run (see Clause 4.2), must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted (see Clause 4.2.2), the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.*

The database was built with 4,224 warehouses and the audited run used all 4,224 warehouses.

**Table 4-1. Initial Cardinality of Tables**

Table Name	Rows
Warehouse	4,224
District	42,240
Item	100,000
New Order	38,016,000
History	126,720,000
Orders	126,720,000
Customer	126,720,000
Order Line	1,267,202,941
Stock	422,400,000
Inactive Warehouses	0

### Distribution of Tables and Logs

*The distribution of tables and logs across all media must be explicitly depicted for the tested and priced systems. )*

Figure 4-2 depicts the database configuration of the tested system to meet the 8-hour steady state requirement.

**Figure 4-2. Data Distribution for the Benchmarked Configuration**

Controller	Drives	Partition	Size	Use
0	8 - 36.4GB	E:	120000MB	Logfile
1	49 - 18.2GB	G: Y:	75000MB 200000MB (NTFS)	Customer and Stock Backup 1 of 2
2	35 - 18.2GB	H:	55000MB	Customer and Stock
3	49 - 18.2GB	I: Z:	75000MB 200000MB (NTFS)	Customer and Stock Backup 2 of 2
4	35 - 18.2GB	J:	55000MB	Customer and Stock
5	42 - 18.2GB	F:	130000MB	Miscellaneous

## Database Model Implemented

*A statement must be provided that describes:*

- 1. The database model implemented by the DBMS used (e.g., relational, network, hierarchical)*
- 2. The database interface (e.g., embedded, call level) and access language (e.g., SQL, DL/I, COBOL, read/write) used to implement the TPC-C transactions. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2000 Enterprise Edition is a relational database. The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code using the Microsoft ODBC interface.

## Partitions/Replications Mapping

*The mapping of database partitions/replications must be explicitly described.*

The database was neither partitioned nor replicated.

## 60-Day Space Requirement

*Details of the 60-day space computations, along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed (see Clause 4.2.3).*

See Appendix D for details about how the 60-day space requirements were calculated.

---

## Clause 5: Performance Metrics and Response Time Related Items

### Measured tpmC

*Measured tpmC must be reported.*

Measured tpmC: 52,587.46 tpmC

Price per tpmC: \$4.31 per tpmC

### Response Times

*Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the Menu response time.*

The TPC-C requirements for the average response time and the 90th percentile were met. Table 5-1 provides the response times for each of the transaction types and the menu for the measured system.

**Table 5-1. Response Times in Seconds**

Transaction Type	Average	Maximum	90 %-tile
New-Order	0.43	7.74	0.64
Payment	0.28	5.33	0.47
Delivery	0.20	0.85	0.38
Stock Level	1.82	5.21	3.50
Order Status	0.34	8.38	0.54
Delivery (Deferred)	0.50	1.81	0.74
Menu	0.20	1.52	0.38

### Keying/Think Times

*The minimum, the average, and the maximum keying and think times must be reported for each transaction type. )*

Table 5-2 lists the keying/think times for the measured system.


**Table 5-2. Keying/Think Times**

Transaction Type	Average	Minimum	Maximum
New-Order	18.01 / 12.04	18.00 / 0.00	18.04 / 120.51
Payment	3.01 / 12.03	3.00 / 0.00	3.04 / 120.51
Delivery	2.01 / 5.04	2.00 / 0.00	2.03 / 50.51
Stock Level	2.01 / 5.03	2.00 / 0.00	2.04 / 50.50
Order Status	2.01 / 10.02	2.00 / 0.00	2.04 / 100.51


## Response Time Frequency Distribution Curves

Response time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.


**Figure 5-1. New-Order Transaction - Response Time Frequency Distribution**

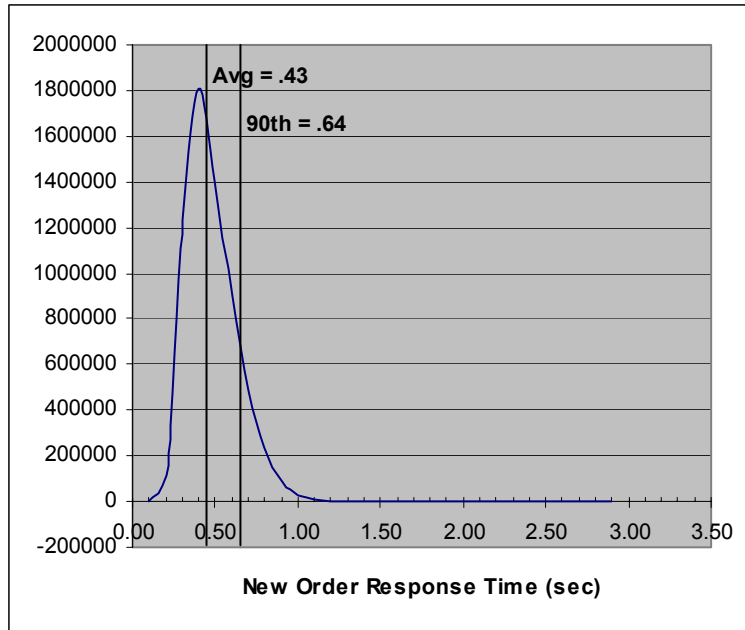

**Figure 5-2. Payment Transaction - Response Time Frequency Distribution**

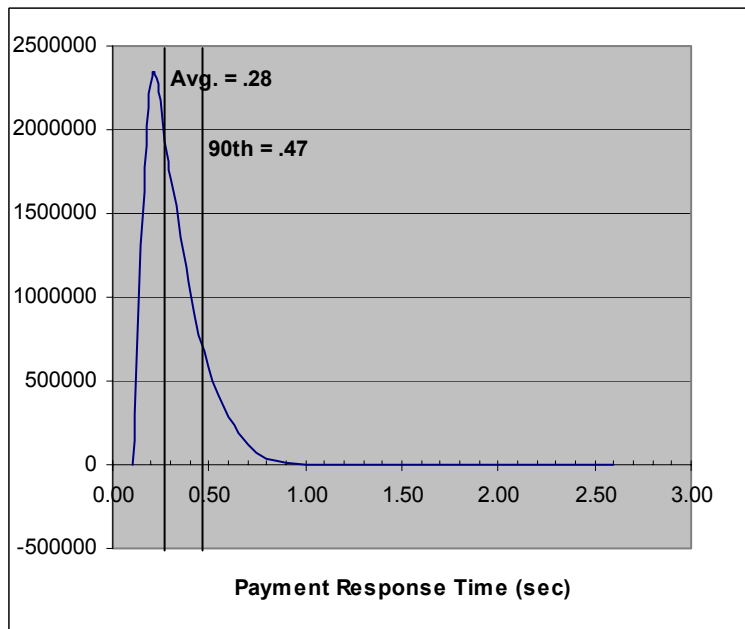

**Figure 5-3. Order-Status Transaction - Response Time Frequency Distribution**

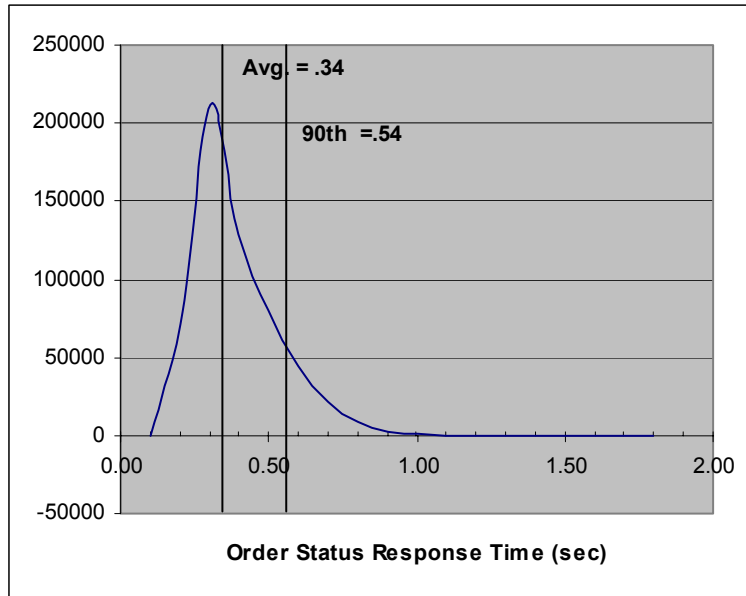


**Figure 5-4. Delivery Transaction - Response Time Frequency Distribution**






**Figure 5-5. Stock-Level Transaction - Response Time Frequency Distribution**

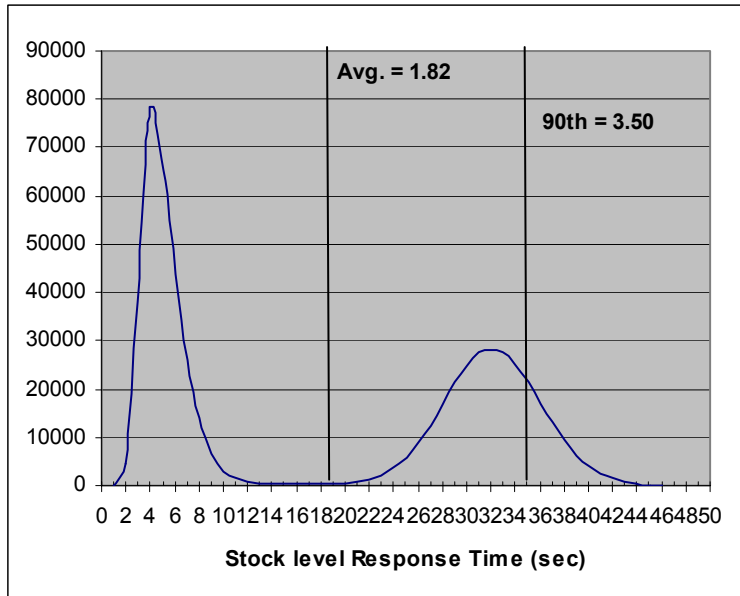

### Performance Curve for Response Time vs. Throughput


The performance curve for response time vs. throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

**Figure 5-6. New-Order Response Time vs. Throughput**

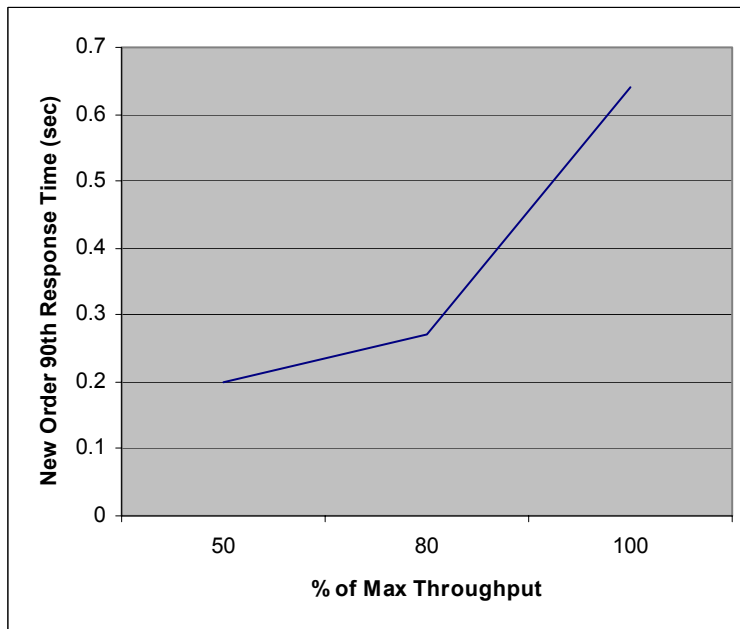

## New Order Think Time Distribution


Figure 5-7. New-Order Think Time Distribution

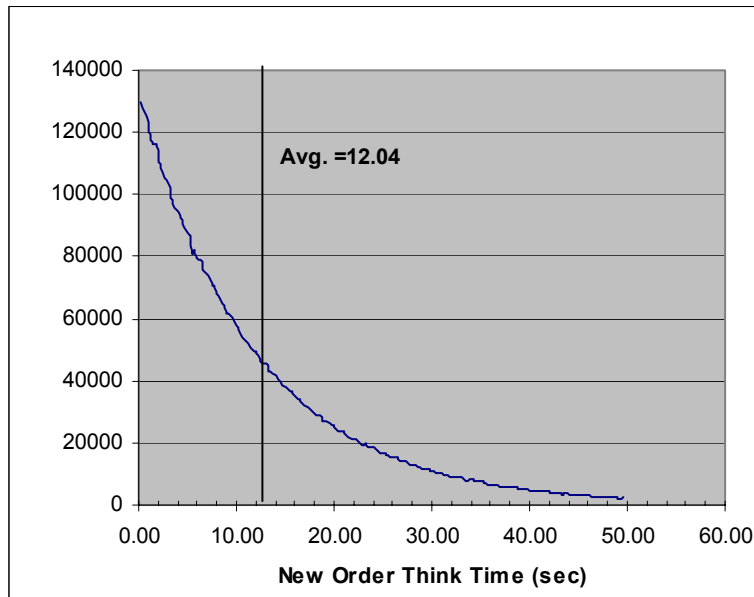

## Throughput vs. Elapsed Time

A graph of throughput vs. elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 5-8. New-Order Throughput vs. Elapsed Time

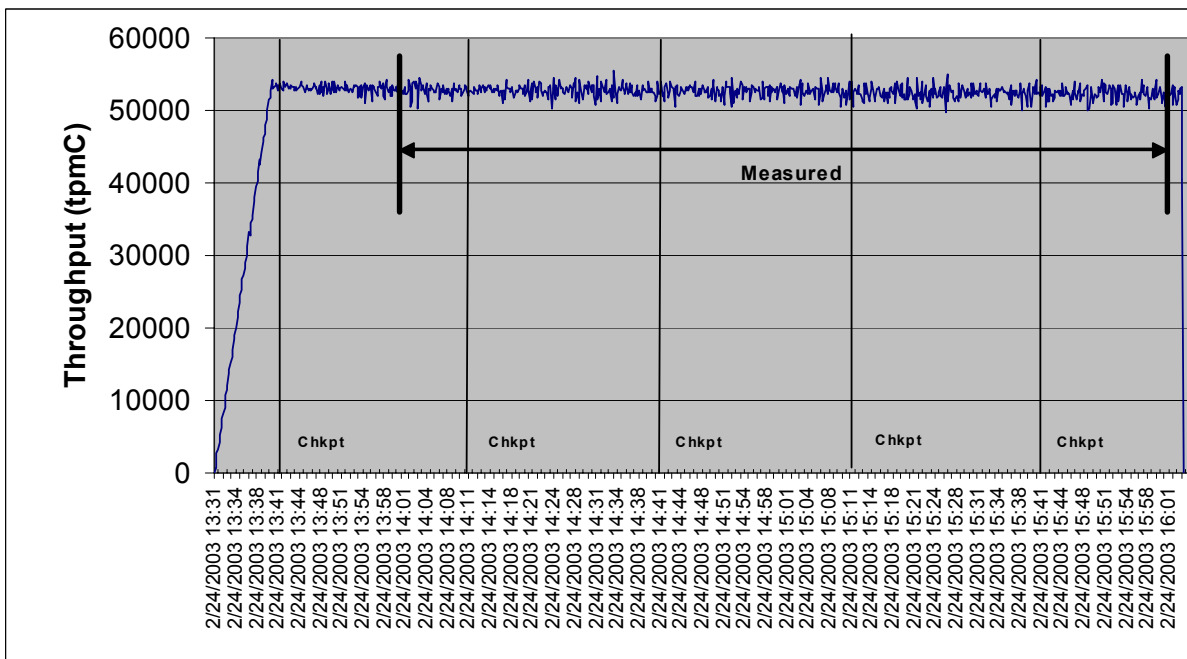

## Steady State Methodology

*The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval (see Clause 5.5) must be described.*

Figure 5-8 shows that the system was in steady state at the beginning of the measurement interval.

## Work Performed during Steady State

*A description of how the work normally performed during a sustained test (e.g., checkpointing, writing redo/undo log records) actually occurred during the measurement interval must be reported.*

### Transaction Flow

The RTE generated the required input data to choose a transaction from the menu. This data was time-stamped. The response for the requested transaction was verified and time-stamped in the RTE log files.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was time-stamped. The return of the screen with the required response data was time-stamped. The difference between these two time-stamps was the response time for that transaction and was logged in the RTE log. The RTE then waited the required think time interval before repeating the process starting at selecting another transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over a 10/100 Ethernet LAN using Microsoft SQL Server ODBC library and RPC calls.

## Checkpoints

Checkpoints were executed on the server during the ramp-up phase and at 30-minute intervals. The measured run contained four checkpoints. SQL Server was started with trace flag 3502, which caused it to log the occurrence of the checkpoint. This information was used to verify that the checkpoints occurred at the appropriate times during the test run.

During a checkpoint, SQL Server flushes all dirty pages from its cache to disk. It places a record in the database transaction log indicating that the checkpoint has completed and that all transactions, which were committed prior to the checkpoint have been written to disk.

## Measurement Interval

*A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.*

The measurement interval was 120 minutes.

## Transaction Mix

*The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed. (8.1.6.13)*

See Table 5-3.

The RTE was given a weighted random distribution, which was not adjusted during the run.

## Percentage of Total Mix

*The percentage of the total mix for each transaction type must be disclosed.*

See Table 5-3.

**Table 5-3. Transaction Statistics and Transaction Mix**

<b>New Order</b>	<b>Value (%)</b>
Home warehouse order lines	99.00
Remote warehouse order lines	1.00
Rolled back transactions	1.00
Average number of items per order	10.00
<b>Payment</b>	
Home warehouse payment transactions	85.06
Remote warehouse payment transactions	14.94
<b>Non-Primary Key Access</b>	
Payment transactions using C_LAST	60.00
Order-Status transactions using C_LAST	60.10
<b>Delivery</b>	
Delivery transactions skipped	0
<b>Transaction Mix</b>	
New-Order	44.86
Payment	43.02
Delivery	4.05
Stock Level	4.04
Order-Status	4.03

## Number of Checkpoints

*The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.*

Checkpoints were performed during the ramp-up period and during each measured run interval. The first measurement interval checkpoint started 10 minutes and 50 seconds after the start of the measurement interval. The four checkpoints in the measured interval are shown in Table 5-4.

**Table 5-4. Checkpoint Start Time and Duration**

<b>Checkpoint</b>	<b>Start Time</b>	<b>Duration</b>
1	14:11:20	16 minutes 42 Seconds
2	14:41:18	16 minutes 32 Seconds
3	15:11:16	17 minutes 37 Seconds
4	15:41:14	18 minutes 58 Seconds

The checkpoint interval was 30 minutes.

---

## Clause 6: SUT, Driver and Communication Definition Related Items

### Description of RTE

*The RTE input parameters, code fragments, functions, etc., used to generate each transaction input field must be disclosed.*

The RTE used was Microsoft BenchCraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE input is listed in Appendix C.

### Emulated Components

*It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to that of the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.*

No components were emulated.

### Benchmarked and Targeted System Configuration Diagrams

*A complete functional diagram of both the benchmarked configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all software and hardware functionality being performed on the Driver System, and its interface to the SUT must be disclosed (see Clause 6.6.3.6).*

The driver RTE generated the transaction input data and transmitted it to the client in HTML format. The driver RTE received the output from the System under Test, time-stamped it, and forwarded it to the Master RTE for post-test processing. No other functionality was included on the driver RTE.

Detailed diagrams of the benchmarked and priced configurations are provided in the section called “General Items” at the beginning of this document.

### Network Configuration

*The network configurations of both the tested services and the proposed (target) services which are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed (see Clause 6.6.4).*

See the measured and priced configuration diagrams for details about the network configuration.

### Network Bandwidth

*The bandwidth of the network(s) used in the tested/priced configuration must be disclosed.*

The 10Mbps Ethernet LAN used to connect the clients and driver RTEs complies with the IEEE.802.3 standard. A 10/100 Ethernet switch was used to connect the clients to the server.

### Operator Intervention

*If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.*

The configuration did not require any operator intervention to sustain the reported throughput.

---

## Clause 7: Pricing Related Items

### Hardware and Software Components

*A detailed list of the hardware and software used in the priced system must be reported. Each separately orderable item must have a vendor part number, description and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed.*

*Pricing source(s) and effective date(s) must also be reported.*

*The total 3-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.*

A detailed list of all hardware and software, including the 3-year price, is provided in the Executive Summary at the front of this report. All third-party quotations are included in Appendix E at the end of this document.

### Availability Date

*The committed delivery date for general availability (availability date) of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the reported availability for the priced system must be the date at which all components are committed to be available.*

The priced configuration is planned to be available April 30, 2003.

### Measured tpmC

*A statement of the measured tpmC, as well as the respective calculations for the 3-year pricing, price/performance (price/tpmC) and the availability date must be included.*

- ◆ Maximum Qualified Throughput: 52,587.46 tpmC
- ◆ Price per tpmC: \$4.31 tpmC
- ◆ Three-year cost of ownership: \$226,504

### Country-Specific Pricing

*Additional Clause 7 related items may be included in the Full Disclosure Report for each country-specific priced configuration. Country-specific pricing is subject to Clause 7.1.7.*

The configuration is priced for the United States of America.

### Usage Pricing

*For any usage pricing, the sponsor must disclose:*

- *Usage level at which the component was priced.*
- *A statement of the company policy allowing such pricing.*

The component pricing based on usage is shown below:

- 1 Microsoft Windows Server 2003 Enterprise Server
- 2 Microsoft Windows 2000 Server
- 4 Microsoft SQL Server 2000 Enterprise Edition (based on per-processor price)

- 3-year support for hardware components (except for components for which 10 percent spares are provided)

## **System Pricing**

*System pricing should include subtotals for the following components: Server Hardware, Server Software, Client Hardware, Client Software, and Network Components used for terminal connection (see Clause 7.2.2.3). System pricing must include line item indication where non-sponsoring companies' brands are used. System pricing must also include line item indication of third-party pricing.*

A detailed list of all hardware and software, including the 3-year price, is provided in the Executive Summary at the front of this report. All third-party quotations are included in Appendix E at the end of this document.



---

## Clause 9: Audit Related Items

### Auditor

*The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.*

This implementation of the TPC-C benchmark was audited by Bradley J. Askins of InfoSizing, Inc. The auditor's attestation letter is provided in this section.

### Availability of the Full Disclosure Report

*The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark<sup>TM</sup>C," the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.*

The TPC Benchmark C Full Disclosure Report is available at [www.tpc.org](http://www.tpc.org).

Benchmark Sponsor: William D. Hall  
 Manager, xSeries Performance  
 IBM Systems Group  
 3039 Cornwallis Road  
 Research Triangle Park, NC 27709

February 27, 2003

I verified the TPC Benchmark™ C performance for the following Client/Server configuration:

Platform: **IBM @server xSeries 360 c/s**  
 Operating system: **Microsoft Windows Server 2003 Enterprise Server**  
 Database Manager: **Microsoft SQL Server 2000 Enterprise Edition**  
 Transaction Manager: **Microsoft COM+**

The results were:

CPU's Speed	Memory	Disks	NewOrder 90% Response Time	tpmC
<b>Server: IBM @server xSeries 360</b>				
4 x Xeon MP (2.0GHz)	8 GB Main (2 MB L3 Cache per processor)	210 x 18.2 GB  8 x 36.4 GB	0.64 Seconds	<b>52,587.46</b>
<b>Clients: Two (2) IBM @server xSeries 225 (Specification for each)</b>				
1 x Xeon DP (2.4 GHz)	1 GB Main (512 KB L2 Cache per processor)	1 x 18.2 GB	n/a	n/a

In my opinion, these performance results were produced in compliance with the TPC's requirements for the benchmark. The following verification items were given special attention:

- The database records were the proper size

- The database was properly scaled and populated
- The required ACID properties were met
- The transactions were correctly implemented
- Input data was generated according to the specified percentages
- The transaction cycle times included the required keying and think times
- The reported response times were correctly measured.
- All 90% response times were under the specified maximums
- At least 90% of all delivery transactions met the 80 Second completion time limit
- The reported measurement interval was 120 minutes (7200 seconds)
- The reported measurement interval was representative of steady state conditions
- Four checkpoints were taken during the reported measurement interval
- The 60 day storage requirement was correctly computed
- The system pricing was verified for major components and maintenance

Additional Audit Notes:

None.

Respectfully Yours,



François Raab, President



Bradley J. Askins, Auditor

# Appendix A: Source Code

## client\_utils.c

```
/* client_utils.c
*/

#include <stdio.h>
#include <time.h>
#include <windows.h>
#include <winperf.h>
#include <winsock.h>
#include "client_utils.h"

#define Li2Double(x) ((double)((x).HighPart) * 4.294967296E9 +
(double)((x).LowPart))

static LARGE_INTEGER pFreq;
static double sFreq;
static int print_thread_id = 1;
static int user_id = 0;
static char *user_code = "C";

/*
 * get_thread_id
 * A function that returns the thread ID of the current thread
 */
static int get_thread_id()
{
    return(GetCurrentThreadId());
}

/*
 * get_prefix
 * Format the output prefix for printing:
 * It contains the user_id, 'C' or 'T' depending on whether it
 * is a terminal or a client and optional a thread identifier
 * The prefix is written in the buffer passed in by the caller.
 */
static void get_prefix(char *buffer)
{
    if (print_thread_id) {
        int thread_id = get_thread_id();
        sprintf(buffer, "%s(%d-%s-%d)%s",
            user_id < 10 ? " " : user_id < 100 ? " " : "",
            user_id,
            user_code,
            thread_id,
            thread_id < 10 ? " " : "");
    } else {
        sprintf(buffer, "%s(%2d-%s)",
            user_id < 10 ? " " : "", user_id, user_code);
    }
}

/*
 * err_printf
 * A var-arg function that appends the current time and
 * other data to the print request and sends it to stderr
 * if it is not a web client, to a file if it is
 */
void err_printf(char *format, ...)
{
    time_t cur_time;
    char time_str[30];
```

```
char line_prefix[50];
va_list ap;

va_start(ap, format);

cur_time = time(&cur_time);
strftime(time_str, 29, "%X", localtime(&cur_time));

get_prefix(line_prefix);

fprintf(ERROROUT, "%s %s - ", line_prefix, time_str);
vfprintf(ERROROUT, format, ap);
fflush(ERROROUT);

va_end(ap);
}

/*
 * encina_error_message
 * Report an encina error message by interpreting it and writing
 * it to both the logfile (if any) and to standard error
 */
void encina_error_message(char *msg, unsigned long n)
{
    char errorMsg[ENCINA_MAX_STATUS_STRING_SIZE];
    encina_StatusToString(n, ENCINA_MAX_STATUS_STRING_SIZE,
errorMsg);
    err_printf("ERROR: %s. Error code = %s (%d 0x%x) \n", msg, errorMsg, n,
n);
}

int get_time_init()
{
    QueryPerformanceFrequency(&pFreq);
    sFreq=Li2Double(pFreq);
    return 0;
}

int get_local_time(time_type *timeP)
{
    double cur_t;
    LARGE_INTEGER counter;

    QueryPerformanceCounter(&counter);
    cur_t = Li2Double(counter) / sFreq;
    timeP->sec = (long)cur_t;
    /* timeP->usec = ((long)cur_t - timeP->sec) * 1000000;*/
    timeP->usec = (long)((cur_t - timeP->sec) * 1000000);
    return 0;
}

/*
 * time_diff_ms
 * Return the difference in milliseconds between two times
 */
int time_diff_ms(struct timeval *t2, struct timeval *t1)
{
    int t_diff;

    t_diff = (t2->tv_usec + 1000000 - t1->tv_usec + 500) / 1000 +
(t2->tv_sec - t1->tv_sec - 1) * 1000;

    return(t_diff);
}

/*
```

```

* perfClntDataInit:
* Initialization for the shared file mapping.
*
* return: pointer to the shared memory space
*
* This routine creates a named mapped memory section that is used
* to communicate the TPCC performance data to the extensible
* counter DLL for NT perfmon.
*/
total_tran_count_t *perfClntDataInit()
{
    HANDLE hMappedObject;
    total_tran_count_t *pClntInfo = NULL;
    TCHAR szMappedObjectName[] =
TEXT("TPCC_CLNT_COUNTER_BLOCK");

    /* create named section for the performance data */
    hMappedObject = CreateFileMapping((HANDLE)0xFFFFFFFF,
        NULL,
        PAGE_READWRITE,
        0,
        sizeof(total_tran_count_t),
        szMappedObjectName);
    if (hMappedObject == NULL) {
        err_printf("perfClntDataInit: CreateFileMapping failed %x\n",
            GetLastError());
        pClntInfo = NULL;
    } else {
        /* map the section and assign the counter block pointer
        * to this section of memory
        */
        pClntInfo = (total_tran_count_t *) MapViewOfFile(hMappedObject,
            FILE_MAP_ALL_ACCESS,
            0,
            0,
            0);
        if (pClntInfo == NULL) {
            err_printf("perfClntDataInit: MapViewOfFile failed %x\n",
                GetLastError());
        } else {
            err_printf("perfClntDataInit: MapViewOfFile success\n");
        }
    }

    return(pClntInfo);
}

```

## client\_utils.h

```

#ifndef TPCC_CLIENT_UTILS_H
#define TPCC_CLIENT_UTILS_H

```

```

#include <stdio.h>
#include <time.h>
#include <dce/tpc.h>
#include <dce/dce_error.h>
#include <encina/encina.h>
#include <stdlib.h>
#include <utils/trace.h>
#include <winsock.h>
#include "mon_client.h"
#include "../include/tpcc_type.h"

```

```

extern FILE * errtpcc;
extern FILE * logtpcc;
extern int debug;

```

```

extern char log_file_name[];
extern void logprintf( char *format, ...);
extern void err_printf( char *format, ...);
extern void encina_error_message(char *msg, unsigned long n);
extern int time_diff_ms(struct timeval *t2, struct timeval *t1);

```

```

typedef struct {
    int num;
    int errs;
    double RTtotal[2]; // 1 for server RT and 0 for client RT
    int RTcount;
} tran_info_t;

```

```

/*
* total_tran_count_t
*
* structure that holds the total count of transaction of each type
* as well as the reposne times.
*/

```

```

typedef struct {
    tran_info_t tran[MAX_TRAN_TYPE + 1];
    int errors;
    double time;
} total_tran_count_t;

```

```

/* enc_status_t
* structure that holds error information
*/

```

```

typedef struct {
    int status;
    int line;
    char file[268];
    unsigned long encinaError;
    char errorMsg[ENCINA_MAX_STATUS_STRING_SIZE];
} enc_status_t;

```

```

#define FALSE 0
#define TRUE 1

```

```

#define DPRINT(args) if (0) err_printf args

```

```

#define CHECK_ENVIRON(str,var) if (str == NULL) { fprintf(ERROROUT, \
    "%s environment variable is not defined.\n",var); }

```

```

#define CHK_STATUS(st, val, _errMsg) \
    if(st) { \
        enc_status.status=val; \
        strcpy(enc_status.file, __FILE__); \
        enc_status.line=__LINE__; \
        enc_status.encinaError = st; \
        if(_errMsg)strcpy(enc_status.errorMsg, _errMsg); \
        if(st!=1) return; \
    }

```

```

#define UTIL_IDENT(a) a

```

```

#if ENCINA_C_ANSI_STRING_TOKEN_SUPPORT
#define UTIL_STRING(a) #a
#define UTIL_CONCAT(a, b) a ## b
#else /* ENCINA_C_ANSI_STRING_TOKEN_SUPPORT */
#define UTIL_STRING(a) "a"
#define UTIL_CONCAT(a, b) UTIL_IDENT(a)b
#endif /* ENCINA_C_ANSI_STRING_TOKEN_SUPPORT */

```

```

/* ENCINA_CALL: Make fail-fast calls on the various services. */
#define ENCINA_CALL(proc_name,call) \

```

```

{
    unsigned long _status;
    ENCINA_CALL_RC(proc_name,call,_status);
    if (_status) exit_program(_status);
}

#define ENCINA_CALL_RC(proc_name,call,rc)
{
    char _errorMsg[ENCINA_MAX_STATUS_STRING_SIZE];
    DPRINT(("ENCINA_CALL_RC: before call %s\n", proc_name));

    rc = (call);
    DPRINT(("ENCINA_CALL_RC: after call %s\n", proc_name));

    if (rc) {
        encina_StatusToString(rc, ENCINA_MAX_STATUS_STRING_SIZE,
            _errorMsg);
        err_printf( "%x\n", rc);
        err_printf( "%s\n", _errorMsg);
        err_printf( "%s\n", proc_name);
    }
}

void err_printf(char *format, ...);
void encina_error_message(char *msg, unsigned long n);
int get_time_init();
int get_local_time(time_type *timeP);
int time_diff_ms(struct timeval *t2, struct timeval *t1);

#endif /* TPCC_CLIENT_UTILS_H */

```

## dlldata.c

```

/*****
DllData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file compile.

To completely reconstruct this file, delete it and rerun MIDL
on all the IDL files in this DLL, specifying this file for the
/dlldata command line option

*****/

#include <rpcproxy.h>

#ifdef __cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
    REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

```

```

#ifdef __cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */

error.h

/* FILE: ERROR.H
 * Microsoft TPC-C Kit Ver.
4.20.000
 * Copyright Microsoft, 1999
 * All Rights Reserved
 *
 * Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for error exception classes.
 *
 * Change history:
 * 4.20.000 - updated rev number to match kit
 * 4.21.000 - fixed bug: ~CBaseErr needed to be declared
virtual
*/

#pragma once

#ifdef _INC_STRING
#include <string.h>
#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int iError;
//error id of message
    char szMsg[256]; //message to
sent to browser
} SERRORMSG;

#define ERR_FATAL_LEVEL 1
#define ERR_WARNING_LEVEL 2
#define ERR_INFORMATION_LEVEL 3

#define ERR_TYPE_LOGIC -1 //logic error in program; internal error
#define ERR_SUCCESS 0 //success (a non-error error)
#define ERR_BAD_ITEM_ID 1 //expected abort record in txnRecord
#define ERR_TYPE_DELIVERY_POST 2 //expected delivery post failed
#define ERR_TYPE_WEBDLL 3 //tpcc web generated error
#define ERR_TYPE_SQL 4 //sql server generated error
#define ERR_TYPE_DBLIB 5 //dblib generated error
#define ERR_TYPE_ODBC 6 //odbc generated error

```

```

#define ERR_TYPE_SOCKET
7 //error on communication socket client rte
only
#define ERR_TYPE_DEADLOCK
8 //dblib and odbc only deadlock condition
#define ERR_TYPE_COM
9 //error from COM call
#define ERR_TYPE_TUXEDO
10 //tuxedo error
#define ERR_TYPE_OS
11 //operating system error
#define ERR_TYPE_MEMORY
12 //memory allocation error
#define ERR_TYPE_TPCC_ODBC
13 //error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB
14 //error from tpcc dblib txn module
#define ERR_TYPE_DELISRV
15 //delivery server error
#define ERR_TYPE_TXNLOG
16 //txn log error
#define ERR_TYPE_BCCONN
17 //Benchcraft connection class
#define ERR_TYPE_TPCC_CONN
18 //Benchcraft connection class
#define ERR_TYPE_ENCINA
19 //Encina error
#define ERR_TYPE_COMPONENT
20 //error from COM component
#define ERR_TYPE_RTE
21 //Benchcraft rte
#define ERR_TYPE_AUTOMATION
22 //Benchcraft automation errors

```

```

class CBaseErr
{
public:
char *m_szApp;
char *m_szMsg;
char *m_szLoc; // code location where the error occurred
int m_idMsg;

CBaseErr(void)
{
m_idMsg = 0;
m_szMsg = new char[m_szMsg_size];
m_szApp = new char[m_szApp_size];
m_szLoc = NULL;

m_szMsg[0] = 0;
m_szApp[0] = 0;

GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
}

virtual ~CBaseErr(void)
{
if (m_szMsg) delete [] m_szMsg;
if (m_szApp) delete [] m_szApp;
if (m_szLoc) delete [] m_szLoc;
};

CBaseErr(int idMsg)

```

```

{
m_idMsg = idMsg;
m_szApp = new char[m_szApp_size];
m_szMsg = new char[m_szMsg_size];
m_szLoc = NULL;

GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
LoadString(GetModuleHandle(NULL), idMsg,
m_szMsg, m_szMsg_size);
}

CBaseErr(LPCTSTR szMsg)
{
m_idMsg = 0;
m_szApp = new char[m_szApp_size];
m_szMsg = new char[m_szMsg_size];
m_szLoc = NULL;

GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
strcpy(m_szMsg, szMsg);
}

void SetError(char *szMsg, LPCTSTR szLocation)
{
if (szMsg != NULL)
strcpy(m_szMsg, szMsg);
else
m_szMsg[0] = 0;

if (szLocation != NULL)
{
delete [] m_szLoc;
m_szLoc = new char[strlen(szLocation)+1];
strcpy(m_szLoc, szLocation);
}
else
{
delete [] m_szLoc;
m_szLoc = NULL;
}
}

virtual void Draw(HWND hwnd, LPCTSTR szStr = NULL)
{
int j;
char szTmp[512];

if (szStr)
j = wprintf(szTmp, "%s\n", szStr);
if (m_szLoc)
j += wprintf(szTmp+j,
"Location=%s\n", m_szLoc);
if (m_szMsg)
j += wprintf(szTmp+j, "%s\n", m_szMsg);

::MessageBox(hwnd, szTmp, m_szApp, MB_OK);
}

char *GetApp(void) { return m_szApp; }
char *GetMsg(void) { return m_szMsg; }
char *GetLocation(void) { return m_szLoc; }

virtual int ErrorType() = 0; // a value which distinguishes the
kind of error that occurred
virtual int ErrorNum() = 0; // an error value
specific to the error type

```

```

        virtual char *ErrorText() = 0;    // a string (i.e., human readable)
        representation of the error
};

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone,
        eSend,
        eSocket,
        eConnect
    };

    CSocketErr(Action eAction, LPCTSTR szLocation);
    CSocketErr(int iError) { m_errId = iError; };
    int          m_errId;
    Action       m_eAction;

    int ErrorType() { return ERR_TYPE_SOCKET; };
    int ErrorNum() { return m_errId; };
    char *ErrorText(void);
};

class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx,
    };

    CSystemErr(Action eAction, LPCTSTR szLocation);

    void Draw(HWND hwnd, LPCTSTR szStr = NULL);

    int          m_errId;
    Action       m_eAction;

    int ErrorType() { return ERR_TYPE_OS; };
    int ErrorNum() { return m_errId; };
    char *ErrorText() { return m_szMsg; };
};

class CMemoryErr : public CBaseErr
{

```

```

public:
    CMemoryErr(void);

    int ErrorType() { return ERR_TYPE_MEMORY; };
    int ErrorNum() { return 0; };
    char *ErrorText() { return "Insufficient Memory to continue."; };
};

install.c

/*      FILE:          INSTALL.C
 *
 *      Microsoft TPC-C Kit Ver.
4.20.000
 *
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      not audited
 *
 *      PURPOSE:       Automated installation application for TPC-C
Web Kit
 *      Contact:      Charles Levine (clevine@microsoft.com)
 *
 *      Change history:
 *
 *          4.20.000 - added COM installation steps
 */

#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <stdio.h>
#include <commctrl.h>
#include "..\..\common\src\ReadRegistry.h"

#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON          hIcon;
HINSTANCE      hInst;

DWORD          versionExeMS;
DWORD          versionExeLS;
DWORD          versionExeMM;
DWORD          versionDIIMS;
DWORD          versionDIILS;

// TPC-C registry settings
TPCCREGISTRYDATA Reg;

static int     iPoolThreadLimit;
static int     iThreadTimeout;
static int     iListenBackLog;
static int     iAcceptExOutstanding;

static int     iMaxPhysicalMemory;
//max physical memory in MB
static char    szLastFileName[64];    // last file we worked
on (for error reporting)

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);

```



```

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
static void ProcessOK(HWND hwnd, char *szDllPath);
static void ReadRegistrySettings(void);
static void WriteRegistrySettings(char *szDllPath);
static BOOL RegisterDLL(char *szFileName);
static int CopyFiles(HWND hDlg, char
*szDllPath);
static BOOL GetInstallPath(char *szDllPath);
static void GetVersionInfo(char *szDllPath, char
*szExePath);
static BOOL CheckWWWebService(void);
static BOOL StartWWWebService(void);
static BOOL StopWWWebService(void);
static void UpdateDialog(HWND hDlg);

BOOL install_com(char *szDllPath);

#include "..\..\common\src\ReadRegistry.cpp"

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE hPrevInstance,
LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;

    InitCommonControls();

    hIcon = LoadIcon(hInstance,
MAKEINTRESOURCE(IDI_ICON1));

    iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(),
LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(),
MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(),
UpdatedDlgProc, (LPARAM)iRc);
        }
    }

    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM
wParam, LPARAM lParam)
{
    HGLOBAL hRes;
    HRSRC hResInfo;
    BYTE *pSrc, *pDst;
    DWORD dwSize;
    static HFONT hFont;

    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12, 0, 0, 0, 400, 0, 0, 0,
0, 0, 0, 0, "Arial");

```

```

        SendMessage( GetDlgItem(hwnd,
IDR_LICENSE1), WM_SETFONT, (WPARAM)hFont, MAKELPARAM(0, 0)
);
        PostMessage(hwnd, WM_INITTEXT,
(WPARAM)0, (LPARAM)0);
        return TRUE;
        case WM_INITTEXT:
            hResInfo = FindResource(hInst,
MAKEINTRESOURCE(IDR_LICENSE1), "LICENSE");
            dwSize = SizeofResource(hInst, hResInfo);
            hRes = LoadResource(hInst, hResInfo);
            pSrc = (BYTE *)LockResource(hRes);
            pDst = (unsigned char *)malloc(dwSize+1);
            if ( pDst )
            {
                memcpy(pDst, pSrc, dwSize);
                pDst[dwSize] = 0;
                SetDlgItemText(hwnd,
IDC_LICENSE, (const char *)pDst);
                free(pDst);
            }
            else
                SetDlgItemText(hwnd,
IDC_LICENSE, (const char *)pSrc);
            return TRUE;
        case WM_DESTROY:
            DeleteObject(hFont);
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            if ( wParam == IDCANCEL )
                EndDialog(hwnd, FALSE);
            default:
                break;
    }
    return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM
wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:
                    SetDlgItemText(hwnd,
IDC_RESULTS, "TPC-C Web Client Installed");
                    break;
            }
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            break;
        default:
            break;
    }
    return FALSE;
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM
wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;

```

```

MEMORYSTATUS memoryStatus;
OSVERSIONINFO VI;
char          szTmp[256];
static char   szDllPath[256];
static char   szExePath[256];

switch(uMsg)
{
    case WM_INITDIALOG:
        GlobalMemoryStatus(&memoryStatus);
        iMaxPhysicalMemory=
(memoryStatus.dwTotalPhys/ 1048576);

        if ( GetInstallPath(szDllPath) )
        {
            MessageBox(hwnd, "Error internet
service inetsrv is not installed.", NULL, MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, FALSE);
            return TRUE;
        }

        // set default values
        ZeroMemory( &Reg, sizeof(Reg) );
        Reg.dwNumberOfDeliveryThreads = 4;
        Reg.dwMaxConnections = 100;
        Reg.dwMaxPendingDeliveries = 100;
        Reg.eDB_Protocol = DBLIB;
        Reg.eTxnMon = None;
        strcpy(Reg.szDbServer,
""");
        strcpy(Reg.szDbName,
"tpcc");

        strcpy(Reg.szDbUser,      "sa");
        strcpy(Reg.szDbPassword,  "");

        iPoolThreadLimit = iMaxPhysicalMemory *
2;

        iThreadTimeout = 86400;
        iListenBackLog = 15;
        iAcceptExOutstanding = 40;

        ReadTPCCRegistrySettings( &Reg );
        ReadRegistrySettings();

        GetModuleFileName(hInst, szExePath,
sizeof(szExePath));

        GetVersionInfo(szDllPath, szExePath);

        wsprintf(szTmp, "Version %d.%2d.%3d",
versionExeMS, versionExeMM, versionExeLS);
        SetDlgItemText(hwnd, IDC_VERSION,
szTmp);

        SetDlgItemText(hwnd, IDC_PATH,
szDllPath);

        SetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer);

        SetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser);

        SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);

        SetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName);

        SetDlgItemInt(hwnd, ED_THREADS,
Reg.dwNumberOfDeliveryThreads, FALSE);

        SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);

        SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);

        SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit, FALSE);

        SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);

        SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);

        SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, iAcceptExOutstanding,
FALSE);

        CheckDlgButton(hwnd, IDC_DBLIB, 0);
        CheckDlgButton(hwnd, IDC_ODBC, 0);
        if ( Reg.eDB_Protocol == DBLIB )
            CheckDlgButton(hwnd,
IDC_DBLIB, 1);

        else
            CheckDlgButton(hwnd,
IDC_ODBC, 1);

        // check OS version level for COM. Must be
at least Windows 2000

        VI.dwOSVersionInfoSize = sizeof(VI);
        GetVersionEx( &VI );
        if (VI.dwMajorVersion < 5)
        {
            HWND hDlg = GetDlgItem(
hwnd, IDC_TM_MTS );

            EnableWindow( hDlg, 0 ); //
disable COM option

            if (Reg.eTxnMon == COM)
                Reg.eTxnMon = None;
        }

        CheckDlgButton(hwnd, IDC_TM_NONE,
0);

        CheckDlgButton(hwnd, IDC_TM_TUXEDO,
0);

        CheckDlgButton(hwnd, IDC_TM_MTS, 0);
        CheckDlgButton(hwnd, IDC_TM_ENCINA,
0);

        switch (Reg.eTxnMon)
        {
            case None:
                CheckDlgButton(hwnd,
IDC_TM_NONE, 1);

                break;

            case TUXEDO:
                CheckDlgButton(hwnd,
IDC_TM_TUXEDO, 1);

                break;

            case ENCINA:
                CheckDlgButton(hwnd,
IDC_TM_ENCINA, 1);

                break;

            case COM:
                CheckDlgButton(hwnd,
IDC_TM_MTS, 1);

                break;
        }

        return TRUE;

    case WM_PAINT:
        if ( !IsIconic(hwnd) )
        {

```

```

        BeginPaint(hwnd, &ps);
        DrawIcon(ps.hdc, 0, 0, hIcon);
        EndPaint(hwnd, &ps);
        return TRUE;
    }
    break;
case WM_COMMAND:
    if ( HIWORD(wParam) == BN_CLICKED )
    {
        switch( LOWORD(wParam) )
        {
            case IDC_DBLIB:
                return
TRUE;

            case IDC_ODBC:
                return
TRUE;

            case IDOK:
                ProcessOK(hwnd, szDllPath);
                return
TRUE;

            case IDCANCEL:
                EndDialog(hwnd, FALSE);
                return
TRUE;

            default:
                return
FALSE;
        }
    }
    break;
default:
    break;
}
return FALSE;
}

static void ProcessOK(HWND hwnd, char *szDllPath)
{
    int    d;
    HWND  hDlg;
    int    rc;

    char    szFullName[256];
    char    szErrMsg[128];

    // read settings from dialog
    Reg.dwNumberOfDeliveryThreads = GetDlgItemInt(hwnd,
ED_THREADS, &d, FALSE);
    Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
    Reg.dwMaxPendingDeliveries = GetDlgItemInt(hwnd,
ED_MAXDELIVERIES, &d, FALSE);

    GetDlgItemText(hwnd, ED_DB_SERVER, Reg.szDbServer,
sizeof(Reg.szDbServer));
    GetDlgItemText(hwnd, ED_DB_USER_ID, Reg.szDbUser,
sizeof(Reg.szDbUser));
    GetDlgItemText(hwnd, ED_DB_PASSWORD, Reg.szDbPassword,
sizeof(Reg.szDbPassword));
    GetDlgItemText(hwnd, ED_DB_NAME, Reg.szDbName,
sizeof(Reg.szDbName));

    if ( IsDlgButtonChecked(hwnd, IDC_DBLIB) )
    {
        Reg.eDB_Protocol = DBLIB;

        rc = 1;
    }
    else if ( IsDlgButtonChecked(hwnd, IDC_ODBC) )
    {
        Reg.eDB_Protocol = ODBC;
        rc = 2;
    }

    if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE) )
        Reg.eTxnMon = None;
    else if ( IsDlgButtonChecked(hwnd, IDC_TM_TUXEDO) )
        Reg.eTxnMon = TUXEDO;
    else if ( IsDlgButtonChecked(hwnd, IDC_TM_MTS) )
        Reg.eTxnMon = COM;
    else if ( IsDlgButtonChecked(hwnd, IDC_TM_ENCINA) )
        Reg.eTxnMon = ENCINA;

    iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
    iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
    iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
    iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);

    ShowWindow(hwnd, SW_HIDE);
    hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
    ShowWindow(hDlg, SW_SHOWNA);
    UpdateDialog(hDlg);

    // write binaries to inetpub\wwwroot
    rc = CopyFiles(hDlg, szDllPath);
    if ( !rc )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrMsg, "Error(s) occured when creating " );
        strcat( szErrMsg, szLastFileName );
        MessageBox(hwnd, szErrMsg, NULL, MB_ICONSTOP |
MB_OK);

        EndDialog(hwnd, 0);
        return;
    }

    // update registry
    SetDlgItemText(hDlg, IDC_STATUS, "Updating Registry.");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
    UpdateDialog(hDlg);
    WriteRegistrySettings(szDllPath);

    // register com proxy stub
    strcpy(szFullName, szDllPath);
    strcat(szFullName, "tpcc_com_ps.dll");
    if (!RegisterDLL(szFullName))
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrMsg, "Error occured when registering " );
        strcat( szErrMsg, szFullName );
        MessageBox(hwnd, szErrMsg, NULL, MB_ICONSTOP |
MB_OK);

        EndDialog(hwnd, 0);
        return;
    }
}

```

```

    }

    // if using COM
    if (Reg.eTxnMon == COM)
    {
        SetDlgItemText(hDlg, IDC_STATUS, "Configuring
COM.");
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        if (install_com(szDllPath))
        {
            ShowWindow(hwnd, SW_SHOWNA);
            DestroyWindow(hDlg);
            strcpy( szErrTxt, "Error occured when
configuring COM settings.");
            MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, 0);
            return;
        }

        Sleep(100);

        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);

        EndDialog(hwnd, rc);
        return;
    }

static void ReadRegistrySettings(void)
{
    HKEY    hKey;
    DWORD   size;
    DWORD   type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Parameters", 0,
KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size = sizeof(iPoolThreadLimit);
        if ( RegQueryValueEx(hKey, "PoolThreadLimit", 0,
&type, (char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
            if ( !iPoolThreadLimit )
                iPoolThreadLimit =
iMaxPhysicalMemory * 2;

        size = sizeof(iThreadTimeout);
        if ( RegQueryValueEx(hKey, "ThreadTimeout", 0,
&type, (char *)&iThreadTimeout, &size) == ERROR_SUCCESS )
            if ( !iThreadTimeout )
                iThreadTimeout = 86400;

        size = sizeof(iListenBackLog);
        if ( RegQueryValueEx(hKey, "ListenBackLog", 0,
&type, (char *)&iListenBackLog, &size) == ERROR_SUCCESS )
            if ( !iListenBackLog )
                iListenBackLog = 15;

        RegCloseKey(hKey);
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters", 0,
KEY_READ, &hKey) == ERROR_SUCCESS )

```

```

    {
        size = sizeof(iAcceptExOutstanding);
        if ( RegQueryValueEx(hKey, "AcceptExOutstanding", 0,
&type, (char *)&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
            if ( !iAcceptExOutstanding )
                iAcceptExOutstanding = 40;

        RegCloseKey(hKey);
    }
}

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY    hKey;
    DWORD   dwDisposition;
    char    szTmp[256];
    char    *ptr;
    int     iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0, REG_SZ, szTmp,
strlen(szTmp)+1);

        RegSetValueEx(hKey, "NumberOfDeliveryThreads", 0,
REG_DWORD, (char *)&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));
        RegSetValueEx(hKey, "MaxConnections", 0,
REG_DWORD, (char *)&Reg.dwMaxConnections,
sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hKey, "MaxPendingDeliveries", 0,
REG_DWORD, (char *)&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hKey, "DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol], strlen(szDBNames[Reg.eDB_Protocol])+1);
        RegSetValueEx(hKey, "TxnMonitor", 0, REG_SZ,
szTxnMonNames[Reg.eTxnMon], strlen(szTxnMonNames[Reg.eTxnMon])+1);

        RegSetValueEx(hKey, "DbServer", 0, REG_SZ,
Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0, REG_SZ,
Reg.szDbName, strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0, REG_SZ,
Reg.szDbUser, strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword", 0, REG_SZ,
Reg.szDbPassword, strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey, "COM_SinglePool", 0, REG_SZ,
szTmp, strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if ( (iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition)) == ERROR_SUCCESS )

```

```

    {
        RegSetValueEx(hKey, "PoolThreadLimit", 0,
REG_DWORD, (char *)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
        RegSetValueEx(hKey, "ThreadTimeout", 0,
REG_DWORD, (char *)&iThreadTimeout, sizeof(iThreadTimeout));
        RegSetValueEx(hKey, "ListenBackLog", 0,
REG_DWORD, (char *)&iListenBackLog, sizeof(iListenBackLog));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if ( (iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition)) == ERROR_SUCCESS )
    {
        RegSetValueEx(hKey, "AcceptExOutstanding", 0,
REG_DWORD, (char *)&iAcceptExOutstanding,
sizeof(iAcceptExOutstanding));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg, WPARAM
wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd, IDC_PROGRESS1,
PBM_SETRANGE, 0, MAKELPARAM(0, 16));
        SendDlgItemMessage(hwnd, IDC_PROGRESS1,
PBM_SETSTEP, (WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE      hLib;
    FARPROC        lpDllEntryPoint;

    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib, "DllRegisterServer");
    if (lpDllEntryPoint != NULL)
    {
        return ((*lpDllEntryPoint)() == S_OK);
    }
    else
        return FALSE; //unable to locate entry point
}

BOOL FileFromResource( char *szResourceName, int iResourceId, char
*szDllPath, char *szFileName )
{
    HGLOBAL          hDLL;
    HRSRC            hResInfo;
    HANDLE           hFile;
    DWORD            dwSize;
    BYTE             *pSrc;

```

```

    DWORD            d;
    char             szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !(hFile = CreateFile(szFullName, GENERIC_WRITE, 0, NULL,
CREATE_ALWAYS, FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d, NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath)
{
    BOOL            bSvcRunning;

    bSvcRunning = CheckWWWebService();
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS, "Stopping Web
Service.");
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        StopWWWebService();
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }

    SetDlgItemText(hDlg, IDC_STATUS, "Copying Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
    UpdateDialog(hDlg);

    // install TPCC.DLL
    strcpy( szLastFileName, "tpcc.dll" );
    if ( !FileFromResource( "TPCCDLL", IDR_TPCCDLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
    UpdateDialog(hDlg);

    // install tpcc_dblib.dll
    strcpy( szLastFileName, "tpcc_dblib.dll" );
    if ( !FileFromResource( "DBLIB_DLL", IDR_DBLIB_DLL,
szDllPath, szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);

```

```

UpdateDialog(hDlg);

// install tpcc_odbc.dll
strcpy( szLastFileName, "tpcc_odbc.dll" );
if (!FileFromResource( "ODBC_DLL", IDR_ODBC_DLL,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tuxapp.exe
strcpy( szLastFileName, "tuxapp.exe" );
if (!FileFromResource( "TUXEDO_APP", IDR_TUXEDO_APP,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_tuxedo.dll
strcpy( szLastFileName, "tpcc_tuxedo.dll" );
if (!FileFromResource( "TUXEDO_DLL", IDR_TUXEDO_DLL,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_com.dll
strcpy( szLastFileName, "tpcc_com.dll" );
if (!FileFromResource( "COM_DLL", IDR_COM_DLL, szDllPath,
szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_com_all.tlb
strcpy( szLastFileName, "tpcc_com_all.tlb" );
if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_com_ps.dll
strcpy( szLastFileName, "tpcc_com_ps.dll" );
if (!FileFromResource( "COM_PS_DLL", IDR_COMPS_DLL,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_com_all.dll
strcpy( szLastFileName, "tpcc_com_all.dll" );
if (!FileFromResource( "COM_ALL_DLL", IDR_COMALL_DLL,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

//if we stopped service restart it.
if ( bSvcRunning )
{

```

```

SetDlgItemText(hDlg, IDC_STATUS, "Starting Web
Service.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
StartWWWService();
}

SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    char *ptr;
    int iRc;

    szDllPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters\\Virtual Roots",
0, KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey, "/", NULL, NULL,
szData, &sv ); // used by IIS 3.0
        if (iRc == ERROR_FILE_NOT_FOUND)
            iRc = RegQueryValueEx( hKey, "/", NULL,
NULL, szData, &sv ); // used by IIS 4.0
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szDllPath, szData);
            if ( (ptr = strchr(szDllPath, ','))
                *ptr = 0;

            len = strlen(szDllPath);
            if ( szDllPath[len-1] != '\\')
            {
                szDllPath[len] = '\\';
                szDllPath[len+1] = 0;
            }
        }
        RegCloseKey(hKey);
    }

    return bRc;
}

static void GetVersionInfo(char *szDLLPath, char *szExePath)
{
    DWORD d;
    DWORD dwSize;
    DWORD dwBytes;
    char *ptr;
    VS_FIXEDFILEINFO *vs;

    versionDIIMS = 0;
    versionDIILS = 0;

```

```

if ( _access(szDLLPath, 0) == 0 )
{
    dwSize = GetFileVersionInfoSize(szDLLPath, &d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
        VerQueryValue(ptr, "\\",&vs, &dwBytes);
        GetFileVersionInfo(szDLLPath, 0, dwSize,
        VerQueryValue(ptr, "\\",&vs, &dwBytes);
        versionDllMS = vs->dwProductVersionMS;
        versionDllLS = vs->dwProductVersionLS;
        free(ptr);
    }
}

versionExeMS = 0x7FFF;
versionExeLS = 0x7FFF;
dwSize = GetFileVersionInfoSize(szExePath, &d);
if ( dwSize )
{
    ptr = (char *)malloc(dwSize);
    GetFileVersionInfo(szExePath, 0, dwSize, ptr);
    VerQueryValue(ptr, "\\",&vs, &dwBytes);

    versionExeMS = vs->dwProductVersionMS;
    versionExeLS = LOWORD(vs->dwProductVersionLS);
    versionExeMM = HIWORD(vs->dwProductVersionLS);
    free(ptr);
}
return;
}

static BOOL CheckWWWebService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS    ssStatus;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("W3SVC"),
SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService, &ssStatus) )
        goto ServiceNotRunning;

    if ( !ControlService(schService, SERVICE_CONTROL_STOP,
&ssStatus) )
        goto ServiceNotRunning;
    //start Service pending, Check the status until the service is running.
    if (! QueryServiceStatus(schService, &ssStatus) )
        goto ServiceNotRunning;

    CloseServiceHandle(schService);
    return TRUE;

ServiceNotRunning:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StartWWWebService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;

```

```

SERVICE_STATUS    ssStatus;
DWORD              dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("W3SVC"),
SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! StartService(schService, 0, NULL) )
        goto StartWWWebErr;
    //start Service pending, Check the status until the service is running.
    if (! QueryServiceStatus(schService, &ssStatus) )
        goto StartWWWebErr;
    while( ssStatus.dwCurrentState != SERVICE_RUNNING)
    {
        dwOldCheckPoint = ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);
        //Wait for the specified interval.
        if ( !QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
                break;
        if (dwOldCheckPoint >= ssStatus.dwCheckPoint)
            //Break if the checkpoint has not been incremented.
                break;
    }

    if (ssStatus.dwCurrentState == SERVICE_RUNNING)
        goto StartWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;

StartWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWebService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS    ssStatus;
    DWORD              dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("W3SVC"),
SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService, &ssStatus) )
        goto StopWWWebErr;

    if ( !ControlService(schService, SERVICE_CONTROL_STOP,
&ssStatus) )
        goto StopWWWebErr;
    //start Service pending, Check the status until the service is running.
    if (! QueryServiceStatus(schService, &ssStatus) )
        goto StopWWWebErr;
    while( ssStatus.dwCurrentState == SERVICE_RUNNING)
    {

```

```

        dwOldCheckPoint = ssStatus.dwCheckPoint;
//Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);
        //Wait for the specified interval.
        if ( !QueryServiceStatus(schService, &ssStatus) )
//Check the status again.
            break;
        if (dwOldCheckPoint >= ssStatus.dwCheckPoint)
//Break if the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState == SERVICE_RUNNING)
        goto StopWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;

StopWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0, PM_REMOVE) )
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

```

## install.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//

#define IDD_DIALOG1          101
#define IDI_ICON1           102
#define IDR_TPCCDLL         103
#define IDD_DIALOG2        105
#define IDI_ICON2           106
#define IDR_DELIVERY        107
#define IDD_DIALOG3        108

#define BN_LOG              1001
#define ED_KEEP             1002
#define ED_THREADS         1003
#define ED_THREADS2        1004
#define IDC_PATH           1007
#define IDC_VERSION        1009
#define IDC_RESULTS        1010
#define IDC_PROGRESS1      1011
#define IDC_STATUS         1012
#define IDC_BUTTON1        1013
#define ED_MAXCONNECTION   1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019

```

```

#define IDC_DBLIB          1021
#define IDC_ODBC          1022
#define IDC_CONNECT_POOL 1023
#define ED_USER_CONNECT_DELAY_TIME 1024

```

```

// Next default values for new objects
//

```

## install.rc

```

//Microsoft Developer Studio generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

//
// English (U.S.) resources
//

#ifndef _AFX_RESOURCE_DLL || defined(AFX_TARG_ENU)
#ifndef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif
#endif

//
// Dialog
//

IDD_DIALOG1 DIALOGEX 0, 0, 219, 351
STYLE DS_MODALFRAME | DS_CENTER | WS_MINIMIZEBOX |
WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT    ED_THREADS,164,45,34,12,ES_RIGHT | ES_NUMBER,
                WS_EX_RTLREADING
    EDITTEXT    ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT |
ES_NUMBER,
                WS_EX_RTLREADING
    EDITTEXT    ED_MAXCONNECTION,164,73,34,12,ES_RIGHT |
ES_NUMBER,
                WS_EX_RTLREADING
    CONTROL    "None",IDC_TM_NONE,"Button",BS_AUTORADIOBUTTON |
                WS_GROUP | WS_TABSTOP,43,100,33,10
    CONTROL    "COM",IDC_TM_MTS,"Button",BS_AUTORADIOBUTTON |
                WS_TABSTOP,43,113,32,10
    CONTROL    "TUXEDO",IDC_TM_TUXEDO,"Button",BS_AUTORADIOBUTTON |
                WS_TABSTOP,106,100,46,10
    CONTROL    "ENCINA",IDC_TM_ENCINA,"Button",BS_AUTORADIOBUTTON |

```



```

        WS_DISABLED | WS_TABSTOP,106,113,43,10
    EDITTEXT    ED_DB_SERVER,131,152,67,12,ES_AUTOHSCROLL
    EDITTEXT    ED_DB_USER_ID,131,165,67,12,ES_AUTOHSCROLL
    EDITTEXT    ED_DB_PASSWORD,131,178,67,12,ES_AUTOHSCROLL
    EDITTEXT    ED_DB_NAME,131,191,67,12,ES_AUTOHSCROLL
    CONTROL
"DBLIB",IDC_DBLIB,"Button",BS_AUTORADIOBUTTON | WS_GROUP |
    WS_TABSTOP,45,219,39,12
    CONTROL
"ODBC",IDC_ODBC,"Button",BS_AUTORADIOBUTTON | WS_TABSTOP,
    91,219,39,12
    EDITTEXT
ED_IIS_MAX_THREAD_POOL_LIMIT,164,263,34,12,ES_RIGHT |
    ES_NUMBER,WS_EX_RTREADING
    EDITTEXT
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,164,277,34,12,ES_RIGHT |
    ES_NUMBER,WS_EX_RTREADING
    EDITTEXT    ED_IIS_THREAD_TIMEOUT,164,291,34,12,ES_RIGHT |
ES_NUMBER,
    WS_EX_RTREADING
    EDITTEXT    ED_IIS_LISTEN_BACKLOG,164,305,34,12,ES_RIGHT |
ES_NUMBER,
    WS_EX_RTREADING
    DEFPUSHBUTTON "OK",IDOK,53,331,50,14
    PUSHBUTTON   "Cancel",IDCANCEL,119,331,50,14
    EDITTEXT    IDC_PATH,106,26,91,13,ES_AUTOHSCROLL |
ES_READONLY
    LTEXT       "Number of Delivery Threads:",IDC_STATIC,35,45,115,12
    LTEXT       "Max Number of Connections:",IDC_STATIC,35,73,115,12
    RTEXT       "Version 4.11",IDC_VERSION,120,4,89,9
    LTEXT       "IIS Max Thread Pool Limit:",IDC_STATIC,36,263,115,12
    LTEXT       "Web Service Backlog Queue
Size:",IDC_STATIC,36,277,115,
    12
    LTEXT       "IIS Thread Timeout (seconds):",IDC_STATIC,36,291,115,12
    LTEXT       "IIS Listen Backlog:",IDC_STATIC,36,307,115,10
    GROUPBOX   "Database
Interface",IDC_STATIC,35,208,163,27,WS_GROUP
    LTEXT       "Installation directory:",IDC_STATIC,35,29,71,10
    GROUPBOX   "Transaction Monitor",IDC_STATIC,33,90,165,37
    LTEXT       "Server Name:",IDC_STATIC,35,155,56,8
    LTEXT       "User ID:",IDC_STATIC,35,168,60,8
    LTEXT       "User Password:",IDC_STATIC,35,181,83,8
    LTEXT       "Database Name:",IDC_STATIC,35,194,54,8
    GROUPBOX   "SQL Server Connection
Properties",IDC_STATIC,22,139,187,
    102
    GROUPBOX   "Web Client Properties",IDC_STATIC,22,15,187,118
    GROUPBOX   "IIS Settings",IDC_STATIC,22,247,187,79
    LTEXT       "Max Pending Deliveries:",IDC_STATIC,35,59,115,12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFOREGROUND | DS_3DLOOK | DS_CENTER |
WS_POPUP | WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON "OK",IDOK,33,45,50,9
    CTEXT       "HTML TPC-C Installation
Successful",IDC_RESULTS,7,22,
    102,18,0,WS_EX_CLIENTEDGE
    ICON        IDI_ICON2,IDC_STATIC,50,7,18,20,SS_REALSIZEIMAGE,
WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG DISCARDABLE 0, 0, 91, 40

```

```

STYLE DS_SYSMODAL | DS_MODALFRAME | DS_3DLOOK |
DS_CENTER | WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL
    "Progress1",IDC_PROGRESS1,"msctls_progress32",WS_BORDER,
    7,20,77,13
    CTEXT       "Static",IDC_STATUS,7,7,77,12,SS_SUNKEN
END

IDD_DIALOG4 DIALOG DISCARDABLE 0, 0, 291, 202
STYLE DS_MODALFRAME | DS_CENTER | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT    IDC_LICENSE,7,7,271,167,ES_MULTILINE |
ES_AUTOVSCROLL |
    ES_AUTOHSCROLL | ES_READONLY | WS_VSCROLL |
WS_HSCROLL
    DEFPUSHBUTTON "I &Agree",IDOK,87,181,50,14
    PUSHBUTTON   "&Cancel",IDCANCEL,153,181,50,14
END

////////////////////////////////////
//
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 345
    END

    IDD_DIALOG2, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 109
        TOPMARGIN, 7
        BOTTOMMARGIN, 54
    END

    IDD_DIALOG3, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 84
        TOPMARGIN, 7
        BOTTOMMARGIN, 33
    END

    IDD_DIALOG4, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 278
        TOPMARGIN, 7
        BOTTOMMARGIN, 195
    END
END

```

```

#endif // APSTUDIO_INVOKED

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
//
// TEXTINCLUDE
//

1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include ""afxres.h""\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

////////////////////////////////////
//
// Icon
//

// Icon with lowest ID value placed first to ensure application icon
// remains consistent on all systems.
IDI_ICON1     ICON DISCARDABLE "icon1.ico"
IDI_ICON2     ICON DISCARDABLE "icon2.ico"

////////////////////////////////////
//
// TPCCDLL
//

IDR_TPCCDLL   TPCCDLL DISCARDABLE
"..\\..\\visapi_dll\\bin\\tpcc.dll"

#ifdef _MAC
////////////////////////////////////
//
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,20,0
PRODUCTVERSION 0,4,20,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN

```

```

BLOCK "040904b0"
BEGIN
    VALUE "Comments", "TPC-C Web Client Installer\0"
    VALUE "CompanyName", "Microsoft\0"
    VALUE "FileDescription", "install\0"
    VALUE "FileVersion", "0, 4, 20, 0\0"
    VALUE "InternalName", "install\0"
    VALUE "LegalCopyright", "Copyright © 1999\0"
    VALUE "OriginalFilename", "install.exe\0"
    VALUE "ProductName", "Microsoft install\0"
    VALUE "ProductVersion", "0, 4, 20, 0\0"
END
END
BLOCK "VarFileInfo"
BEGIN
    VALUE "Translation", 0x409, 1200
END
END

#endif // !_MAC

////////////////////////////////////
//
// LICENSE
//

IDR_LICENSE1   LICENSE DISCARDABLE "license.txt"

////////////////////////////////////
//
// DBLIB_DLL
//

IDR_DBLIB_DLL   DBLIB_DLL DISCARDABLE
"..\\..\\db_dblib_dll\\bin\\tpcc_dblib.dll"

////////////////////////////////////
//
// ODBC_DLL
//

IDR_ODBC_DLL   ODBC_DLL DISCARDABLE
"..\\..\\db_odbc_dll\\bin\\tpcc_odbc.dll"

////////////////////////////////////
//
// TUXEDO_APP
//

IDR_TUXEDO_APP   TUXEDO_APP DISCARDABLE
"..\\..\\tuxapp\\bin\\tuxapp.exe"

////////////////////////////////////
//
// TUXEDO_DLL
//

IDR_TUXEDO_DLL   TUXEDO_DLL DISCARDABLE
"..\\..\\tm_tuxedo_dll\\bin\\tpcc_tuxedo.dll"

////////////////////////////////////
//
// COM_DLL
//

IDR_COM_DLL   COM_DLL DISCARDABLE
"..\\..\\tm_com_dll\\bin\\tpcc_com.dll"

```

```

////////////////////////////////////
//
// COM_PS_DLL
//
IDR_COMPS_DLL      COM_PS_DLL DISCARDABLE
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.dll"

////////////////////////////////////
//
// COM_ALL_DLL
//
IDR_COMALL_DLL     COM_ALL_DLL DISCARDABLE
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.dll"

////////////////////////////////////
//
// COM_TYPLIB
//
IDR_COMTYPLIB_DLL  COM_TYPLIB DISCARDABLE
"..\\..\\tpcc_com_all\\src\\tpcc_com_all.tlb"

#endif // English (U.S.) resources
////////////////////////////////////

#ifndef APSTUDIO_INVOKED
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////
#endif // not APSTUDIO_INVOKED

```

## **install\_com.cpp**

```

/*      FILE:          INSTALL_COM.CPP
*
*      4.20.000
*
*      All Rights Reserved
*
*      Copyright Microsoft, 1999
*
*      not audited
*
*      PURPOSE:       installation code for COM application for
TPC-C Web Kit
*      Contact:      Charles Levine (clevine@microsoft.com)
*
*      Change history:
*      4.20.000 - first version
*/

#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{

```

```

}
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp = NULL;
    ICatalogCollection* pCatalogCollectionCo = NULL;
    ICatalogCollection* pCatalogCollectionItf = NULL;
    ICatalogCollection* pCatalogCollectionMethod = NULL;

    ICatalogObject* pCatalogObjectApp = NULL;
    ICatalogObject* pCatalogObjectCo = NULL;
    ICatalogObject* pCatalogObjectItf = NULL;
    ICatalogObject* pCatalogObjectMethod = NULL;

    _bstr_t bstrTemp, bstrTemp2,
    bstrTemp3, bstrTemp4;
    _bstr_t bstrDllPath =
szDllPath;
    _variant_t vTmp, vKey;
    long lActProp, lCount,
    lCountCo, lCountItf, lCountMethod;
    bool bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);

    HRESULT hr = CoCreateInstance(CLSID_COMAdminCatalog,
    NULL,
    CLSCTX_INPROC_SERVER,
    IID_ICOMAdminCatalog,
    (void**) &pCOMAdminCat);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "Applications";

    // Attempt to connect to "Applications" in the Catalog
    hr = pCOMAdminCat->GetCollection(bstrTemp,
    (IDispatch**) &pCatalogCollectionApp);
    if (!SUCCEEDED(hr)) goto Error;

    // Attempt to load the "Applications" collection
    hr = pCatalogCollectionApp->Populate();
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionApp->get_Count(&lCount);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through applications to delete existing "TPC-C" application
    (if any)
    while (lCount > 0)
    {
        hr = pCatalogCollectionApp->get_Item(lCount - 1,
        (IDispatch**) &pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogObjectApp->get_Name(&vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        if (wcsncmp(vTmp.bstrVal, L"TPC-C"))
        {

```

```

        lCount--;
        continue;
    }
    else
    {
        hr = pCatalogCollectionApp->Remove(lCount
- 1);
        if (!SUCCEEDED(hr)) goto Error;
        break;
    }
}

hr = pCatalogCollectionApp->SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

// add the new application
hr = pCatalogCollectionApp->Add((IDispatch**)
&pCatalogObjectApp);
if (!SUCCEEDED(hr)) goto Error;

// set properties
bstrTemp = "Name";
vTmp = "TPC-C";
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set as a library (in process) application
bstrTemp = "Activation";
lActProp = COMAdminActivationInproc;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set security level to process
bstrTemp = "AccessChecksLevel";
lActProp = COMAdminAccessChecksApplicationLevel;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// save key to get the Components collection later
hr = pCatalogObjectApp->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

// save changes (app creation) so component installation will work
hr = pCatalogCollectionApp->SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectApp->Release();
pCatalogObjectApp = NULL;

bstrTemp = "TPC-C";
app name
bstrTemp2 = bstrDllPath + "tpcc_com_all.dll";
DLL
bstrTemp3 = bstrDllPath + "tpcc_com_all.tlb";
type library (TLB)
bstrTemp4 = bstrDllPath + "tpcc_com_ps.dll";
proxy/stub dll

hr = pCOMAdminCat->InstallComponent(bstrTemp,
bstrTemp2,
bstrTemp3,
bstrTemp4);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Components";
hr = pCatalogCollectionApp->GetCollection(bstrTemp, vKey,
(IDispatch**) &pCatalogCollectionCo);
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->get_Count(&lCountCo);
if (!SUCCEEDED(hr)) goto Error;

// iterate through components in application and set the properties
while (lCountCo > 0)
{
    hr = pCatalogCollectionCo->get_Item(lCountCo - 1,
(IDispatch**) &pCatalogObjectCo);
    if (!SUCCEEDED(hr)) goto Error;

    // used for debugging (view the name)
    hr = pCatalogObjectCo->get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructionEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructorString";
    bstrTemp2 = "dummy string (do not remove)";
    vTmp = bstrTemp2;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "JustInTimeActivation";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "MaxPoolSize";
    vTmp.Clear(); // clear variant so it isn't stored as a
bool (_variant_t feature)
    vTmp = (long)30;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ObjectPoolingEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // save key to get the InterfacesForComponent collection
    hr = pCatalogObjectCo->get_Key(&vKey);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "InterfacesForComponent";
    hr = pCatalogCollectionCo->GetCollection(bstrTemp,
vKey, (IDispatch**) &pCatalogCollectionItf);
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionItf->Populate();
    if (!SUCCEEDED(hr)) goto Error;
}

```

```

        hr = pCatalogCollectionItf->get_Count(&ICountItf);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through interfaces in component
        while (ICountItf > 0)
        {
            hr =
pCatalogCollectionItf->get_Item(ICountItf - 1, (IDispatch**)
&pCatalogObjectItf);
                if (!SUCCEEDED(hr)) goto Error;

                // save key to get the MethodsForInterface
collection
                hr = pCatalogObjectItf->get_Key(&vKey);
                if (!SUCCEEDED(hr)) goto Error;

                bstrTemp = "MethodsForInterface";
                hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionMethod);
                if (!SUCCEEDED(hr)) goto Error;

                hr = pCatalogCollectionMethod->Populate();
                if (!SUCCEEDED(hr)) goto Error;

                hr =
pCatalogCollectionMethod->get_Count(&ICountMethod);
                if (!SUCCEEDED(hr)) goto Error;

                // iterate through methods of interface
                while (ICountMethod > 0)
                {
                    hr =
pCatalogCollectionMethod->get_Item(ICountMethod - 1, (IDispatch**)
&pCatalogObjectMethod);
                            if (!SUCCEEDED(hr)) goto Error;

                            bstrTemp = "AutoComplete";
                            bTmp = TRUE;
                            vTmp = bTmp;
                            hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
                                    if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectMethod->Release();
                            pCatalogObjectMethod = NULL;

                            ICountMethod--;
                }

                // save changes
                hr =
pCatalogCollectionMethod->SaveChanges(&IActProp);
                if (!SUCCEEDED(hr)) goto Error;

                pCatalogObjectItf->Release();
                pCatalogObjectItf = NULL;

                ICountItf--;
        }

        pCatalogObjectCo->Release();
        pCatalogObjectCo = NULL;

```

```

        ICountCo--;
    }

    // save changes
    hr = pCatalogCollectionCo->SaveChanges(&IActProp);
    if (!SUCCEEDED(hr)) goto Error;

    pCatalogCollectionApp->Release();
    pCatalogCollectionApp = NULL;

    pCatalogCollectionCo->Release();
    pCatalogCollectionCo = NULL;

    pCatalogCollectionItf->Release();
    pCatalogCollectionItf = NULL;

    pCatalogCollectionMethod->Release();
    pCatalogCollectionMethod = NULL;

Error:
    CoUninitialize();

    if (!SUCCEEDED(hr))
    {
        LPTSTR lpBuf;
        DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER |
FORMAT_MESSAGE_FROM_SYSTEM,
        NULL,
        hr,
        MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),
        (LPTSTR) &lpBuf,
        0,
        NULL);
        // _tprintf(_T("Error adding components. HRESULT:
0x%x\n%s"), hr, lpBuf);
        return TRUE;
    }
    else
        return FALSE;
}

```

### **license.txt**

#### END-USER LICENSE AGREEMENT FOR MICROSOFT TPC-C BENCHMARK KIT

IMPORTANT READ CAREFULLY: This Microsoft End-User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and Microsoft Corporation for the Microsoft software product identified above, which includes computer software and may include associated media, printed materials, and online or electronic documentation (SOFTWARE PRODUCT). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this Agreement, you are not authorized to use the SOFTWARE PRODUCT.

The SOFTWARE PRODUCT is protected by copyright laws

and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE. This EULA grants you the following rights:

Use. Microsoft grants to you the right to install and use copies of the SOFTWARE PRODUCT only in conjunction with validly licensed copies of Microsoft SQL Server and/or Microsoft Windows NT Server software. You may also make copies of the SOFTWARE PRODUCT for backup and archival purposes.

2. RESTRICTIONS.

--You must maintain all copyright notices on all copies of the SOFTWARE PRODUCT.

--You may not distribute copies of the SOFTWARE PRODUCT to third parties.

--You may not rent, lease or lend the SOFTWARE PRODUCT.

--You may not use the SOFTWARE PRODUCT or any derivative works thereof to internally test database management system software other than Microsoft SQL Server and/or operating system software other than Microsoft Windows NT.

-- You may not disclose the results of any benchmark tests using the SOFTWARE PRODUCT to any third party without Microsoft's prior written approval.

-- You may not disclose or provide the SOFTWARE PRODUCT or any derivative works thereof, or any information relating to the SOFTWARE PRODUCT (including the existence of the SOFTWARE PRODUCT or the results of use and testing or benchmark testing), to any third party without Microsoft's written permission.

3. TERMINATION. Without prejudice to any other rights, Microsoft may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT.

4. COPYRIGHT. All title and copyrights in and to the SOFTWARE PRODUCT and any copies thereof are owned by Microsoft or its suppliers. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT is the property of the respective content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants you no rights to use such content.

5. UPGRADES. If the SOFTWARE PRODUCT is labeled as an upgrade, you must be properly licensed to use a product identified by Microsoft as being eligible for the upgrade in order to use the SOFTWARE PRODUCT. A SOFTWARE PRODUCT labeled as an upgrade replaces and/or supplements the product that formed the basis for your eligibility for the upgrade. You may use the resulting upgraded product only in accordance with the terms of this EULA.

6. U.S. GOVERNMENT RESTRICTED RIGHTS.

The SOFTWARE PRODUCT is provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, WA 98052-6399.

7. EXPORT RESTRICTIONS.

You agree that you will not export or re-export the SOFTWARE PRODUCT to any country, person, entity or end user subject to U.S.A. export restrictions. Restricted countries currently include, but are not necessarily limited to Cuba, Iran, Iraq, Libya, North Korea, Syria, and the Federal Republic of Yugoslavia (Serbia and Montenegro, U.N. Protected Areas and areas of Republic of Bosnia and Herzegovina under the control of Bosnian Serb forces). You warrant and represent that neither the U.S.A. Bureau of Export Administration nor any other federal agency has suspended, revoked or denied your export privileges.

8. NO WARRANTY. ANY USE OF THE SOFTWARE PRODUCT IS AT YOUR OWN RISK. THE SOFTWARE PRODUCT IS PROVIDED FOR USE ONLY WITH MICROSOFT SQL SERVER AND/OR MICROSOFT WINDOWS NT SERVER SOFTWARE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MICROSOFT AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT.

9. NO LIABILITY FOR CONSEQUENTIAL DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL MICROSOFT OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT, EVEN IF MICROSOFT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

10. LIMITATION OF LIABILITY. MICROSOFT'S ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY UNDER THIS EULA SHALL NOT EXCEED FIVE DOLLARS (US\$5.00).

11. MISCELLANEOUS

This EULA is governed by the laws of the State of Washington, U.S.A.

Should you have any questions concerning this EULA, or if you desire to contact Microsoft for any reason, please contact the Microsoft subsidiary serving your country, or write:

Microsoft Sales Information Center/One Microsoft Way/Redmond, WA 98052-6399.

Si vous avez acquis votre produit Microsoft au CANADA, la garantie limitée suivante vous concerne:

EXCLUSION DE GARANTIES. Microsoft renonce entièrement ... toute garantie pour le LOGICIEL. Le LOGICIEL et toute autre documentation s'y rapportant sont fournis ® comme tels - sans aucune garantie quelle qu'elle soit, expresse ou implicite, y compris, mais ne se limitant pas aux garanties implicites de la qualité, marchande ou un usage particulier. Le risque total d'écoulement de l'utilisation ou de la

performance du LOGICIEL est entre vos mains.

RESPONSABILITÉ LIMITÉE. La seule obligation de Microsoft et votre recours exclusif concernant ce contrat n'excluront pas cinq dollars (US\$5.00).

#### ABSENCE DE RESPONSABILITÉ POUR LES DOMMAGES INDIRECTS.

Microsoft ou ses fournisseurs ne pourront être tenus responsables en aucune circonstance de tout dommage quel qu'il soit (y compris mais non de façon limitative les dommages directs ou indirects causés par la perte de bénéfices commerciaux, l'interruption des affaires, la perte d'information commerciale ou toute autre perte pécuniaire) résultant de l'utilisation ou de l'impossibilité d'utilisation de ce produit, et ce, même si la société, Microsoft a, à l'avance, avisé de l'éventualité de tels dommages. Certains États/juridictions ne permettent pas l'exclusion ou la limitation de responsabilité relative aux dommages indirects ou consécutifs, et la limitation ci-dessus peut ne pas s'appliquer à votre regard. La présente Convention est régie par les lois de la province d'Ontario, Canada. Chacune des parties ... la présente reconnaît irrévocablement la compétence des tribunaux de la province d'Ontario et consent ... instituer tout litige qui pourrait découler de la présente auprès des tribunaux situés dans le district judiciaire de York, province d'Ontario. Au cas où vous auriez des questions concernant cette licence ou que vous désiriez vous mettre en rapport avec Microsoft pour quelque raison que ce soit, veuillez contacter la succursale Microsoft desservant votre pays, dont l'adresse est fournie dans ce produit, ou écrire ... : Microsoft Customer Sales and Service, One Microsoft Way, Redmond, Washington 98052 6399.

### mon\_client.c

```
/*
 *      mon_client.c
 *
 */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <stdarg.h>
#include <time.h>
#include <pthread.h>
#include <tpm/mon/mon.h>
#include <utils/trace.h>
#include "../include/delivery.h"
#include "../include/neworder.h"
#include "../include/payment.h"
#include "../include/stocklevel.h"
#include "../include/orderstatus.h"
#include "../include/tpcc_type.h"
#include "mon_client.h"
#include "client_utils.h"

extern total_tran_count_t *perfCntDataInit();
static void read_mon_environment(void);

static char *cellName;
static int envRetrieval = 0;
static int useSecurity = FALSE;
static CRITICAL_SECTION init_lock;
static total_tran_count_t *pClientInfo=NULL; /* keep stats for the client process */
static num_active_threads = 0;
```

```
static int iStatsFrequency = 1;
FILE *errtpcc;
char *errFile = "C:/temp/tpcc_encina.out";
enc_status_t enc_status;

#define NewOrder_code NEWO_TRANS
#define Payment_code PAYMENT_TRANS
#define OrderStatus_code ORDER_STAT_TRANS
#define Delivery_code DELIVERY_TRANS
#define StockLevel_code STOCK_TRANS

#define INT_ENV_VALUE(var, default) \
    (var = getenv(#var) ? atoi(getenv(#var)) : default)

#define PRE_RPC_WORK(headerP, tran, sub_tran) \
    if (iStatsFrequency > 0) \
        pre_rpc(headerP, tran, sub_tran); \
    else \
        (headerP)->stats = 0;
#define POST_RPC_WORK(headerP, tran) \
    if (iStatsFrequency > 0) \
        post_rpc(headerP, tran)

/* CALTPCC
 * Macro to sends 1 RPC and then handles any errors.
 *
 * The macro takes the name of the RPC (e.g., NewOrder)
 * and makes the RPC by calling the appropriate function
 * (e.g., impTPCCNewOrder).
 */
#define CALLTPCC(name,length,dataP,header,trpcStatusP) \
{ \
    UTIL_CONCAT(impTPCC,name)(length,dataP,&header,trpcStatusP); \
    if (*(trpcStatusP)) { \
        char msg[100]; \
        sprintf(msg, "TRPC error during impTPCC%s", UTIL_STRING(name)); \
        header.returncode = TRPC_ERROR; \
        encina_error_message(msg, *(trpcStatusP)); \
    } else if ((header.returncode != TPCC_SUCCESS) && \
        (header.returncode != INVALID_NEWO)) { \
        char msg[100]; \
        sprintf(msg, "App error during impTPCC%s: ", UTIL_STRING(name)); \
        encina_error_message(msg, header.returncode); \
    } \
}

/*
 * pre_rpc -- For debug purposes
 *
 * Called before an RPC is made.
 * Set the state of the thread and keep track of the time the RPC is sent.
 * This is used by the Background thread to report the state of the client.
 */
static void pre_rpc(data_header *headerP,
                    int tran_type,
                    int sub_tran_type)
{
    if (iStatsFrequency < 1) {
        headerP->stats = 0;
    } else {
        int num;
        num = ++(pClientInfo->tran[tran_type].num);
        headerP->stats = (num % iStatsFrequency == 0) ? 1 : 0;
        if (headerP->stats)
            { /* measure the time for RT */
                get_local_time(&headerP->clnt_start);
            }
    }
}
```

```

        headerP->srv_start.sec = 0; /* initialize the server time
*/
        headerP->srv_start.usec = 0;
        headerP->srv_end.sec = 0;
        headerP->srv_end.usec = 0;
    }
}

/*
 * post_rpc
 *
 * Called when the RPC returns from the server
 *
 * Keeps track of the client response time and the server response time
 * as well as the state of the thread. This is used by the background
 * debug thread to report the state of the client
 */
static void post_rpc(data_header *headerP,
                    int tran_type)
{
    double time_diff;
    int tran_failed;
    struct timeval start_time, end_time;

    if (headerP->stats)
        get_local_time(&headerP->clnt_end);
    else
        return;

    /* Store the info for each client.
     * Note: Since we don't use mutex for performance reason, pClientInfo
     * may not be accurate if more than one thread work on the same
     * data at a same time. But this should give us reasonable info.
     */
    if ((headerP->returncode == TPCC_SUCCESS) ||
        (headerP->returncode == INVALID_NEWO)) {
        tran_failed = 0;
    } else {
        pClientInfo->tran[tran_type].errs ++;
        pClientInfo->errors ++;
        tran_failed = 1;
    }
    if (headerP->stats && tran_type <= MAX_TRAN_TYPE && tran_type > 0
        && !tran_failed) {
        /* update total server round trip response time */
        start_time.tv_sec = headerP->srv_start.sec;
        start_time.tv_usec = headerP->srv_start.usec;
        end_time.tv_sec = headerP->srv_end.sec;
        end_time.tv_usec = headerP->srv_end.usec;
        time_diff = time_diff_ms(&end_time, &start_time);
        pClientInfo->tran[tran_type].RTtotal[1] += time_diff;
        DPRINT(("srv start_time %d.%d, end_time %d.%d, time_diff
%f\n",
                start_time.tv_sec, start_time.tv_usec,
                end_time.tv_sec, end_time.tv_usec,
                time_diff));

        /* update total client round trip response time */
        start_time.tv_sec = headerP->clnt_start.sec;
        start_time.tv_usec = headerP->clnt_start.usec;
        end_time.tv_sec = headerP->clnt_end.sec;
        end_time.tv_usec = headerP->clnt_end.usec;
        time_diff = time_diff_ms(&end_time, &start_time);
        pClientInfo->tran[tran_type].RTtotal[0] += time_diff;
        DPRINT(("clnt start_time %d.%d, end_time %d.%d, time_diff
%f\n",
                start_time.tv_sec, start_time.tv_usec,
                end_time.tv_sec, end_time.tv_usec,
                time_diff));
    }
}

/* update num for the number of trans which have RT measured */
pClientInfo->tran[tran_type].RTcount ++;
}

/*
 * The following send_*** functions are called from CTPCC_ENCINA class.
 */

/*
 * send_new_order
 *
 * Send a new order request to the server
 */
int send_new_order(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, NEWO_TRANS, 0);
    CALLTPCC(NewOrder,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, NEWO_TRANS);
    if (header.returncode == INVALID_NEWO)
        return TPCC_SUCCESS;
    else
        return header.returncode;
}

/*
 * send_payment
 *
 * Send a payment request to the server
 */
int send_payment(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, PAYMENT_TRANS, 0);
    CALLTPCC(Payment,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, PAYMENT_TRANS);
    return header.returncode;
}

/*
 * send_order_status
 *
 * Send a order status request to the server
 */
int send_order_status(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, ORDER_STAT_TRANS, 0);
    CALLTPCC(OrderStatus,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, ORDER_STAT_TRANS);
    return header.returncode;
}

/*
 * send_delivery
 *
 * Send a delivery request to the server
 */
int send_delivery(long length, unsigned char *dataP)
{

```



```

trpc_status_t trpcStatus;
data_header header;

PRE_RPC_WORK(&header, DELIVERY_TRANS, 0);
CALLTPCC(Delivery,length,dataP,header,&trpcStatus);
POST_RPC_WORK(&header, DELIVERY_TRANS);
return header.returncode;
}

/*
 * send_stock_level
 *      Send a stock level request to the server
 */
int send_stock_level(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, STOCK_TRANS, 0);
    CALLTPCC(StockLevel,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, STOCK_TRANS);
    return header.returncode;
}

/*
 * Enroll the client:
 *      get the necessary handles.
 * This function should be called only once. Use static var client_enrolled to
 * control it.
 */
void enroll_client()
{
    static char *clientName="tpcc_client";
    unsigned long status ;
    static int client_enrolled = 0;
    unsigned32    client_authnLevel;
    unsigned32    client_authzSvc;
    time_type a_time;
    char err_msg[100];

    MUTEX_INIT(&init_lock);
    get_local_time(&a_time);
    srand(a_time.sec ^ a_time.usec);

    MUTEX_LOCK(&init_lock);
    if (client_enrolled) {
        MUTEX_UNLOCK(&init_lock);
        return;
    }

    /* open output file for tracing */
    errtpcc = fopen(errFile, "w");
    if(!errtpcc)
    {
        sprintf(err_msg, "Cannot open file %s", errFile);
        CHK_STATUS(1,
        ERROUT_FILE_NOT_FOUND,err_msg);
    }

    get_time_init();
    // initialize the space for perfmon
    pClientInfo = perfCntDataInit();
    if (pClientInfo == NULL) // in case something wrong
        pClientInfo = malloc(sizeof(total_tran_count_t));
    memset(pClientInfo, 0, sizeof(total_tran_count_t));

```

```

read_mon_environment();

if(!cellName)
    CHK_STATUS(30, CELL_NAME_UNAVAILABLE,
    "ENCINA_TPM_CELL is not set!");

if (useSecurity) {
    client_authnLevel = rpc_c_protect_level_connect;
    client_authzSvc = rpc_c_authz_dce;
} else {
    client_authnLevel = rpc_c_protect_level_none;
    client_authzSvc = rpc_c_authz_none;
}

if (envRetrieval == 0) {
ENCINA_CALL_RC("mon_RetrieveEnable",mon_RetrieveEnable(FALSE),sta
tus);
    CHK_STATUS(status, MON_RETRIEVEENABLE_FAILED,
    "mon_RetrieveEnable failed");
}

err_printf("enroll_client: calling mon_InitClient\n");

ENCINA_CALL_RC("mon_InitClient",mon_InitClient(clientName,cellName),
status);
    CHK_STATUS(status, MON_INITCLIENT_FAILED,
    "mon_InitClient failed");

DPRINT(("mon_SecuritySetDefaults-> authn %d, authz %d\n",
    client_authnLevel, client_authzSvc));
ENCINA_CALL_RC("mon_SecuritySetDefaults",

mon_SecuritySetDefaults(client_authnLevel,client_authzSvc),
status);
    CHK_STATUS(status, MON_SECURITYSET_FAILED,
    "mon_SecuritySetDefaults failed");

ENCINA_CALL_RC("mon_SetHandleCacheRefreshInterval",
    mon_SetHandleCacheRefreshInterval(300), status);
    CHK_STATUS(status, MON_SETREFRESHINTERVAL_FAILED,
    "mon_SetHandleCacheRefreshInterval failed");

{
    dbInfo_data_t data;
    trpc_status_t trpcStatus;
    /* Get DB Info -- currently id does not do anything
    but it will tell us if there is a server out there.
    Better to know instead of when all the terminals
    are up and ready
    */
    impTPCCNOInfo(&data, &trpcStatus);
    if (trpcStatus) {
        char msg[100];
        sprintf(msg, "TRPC error during db info at init.");
        encina_error_message(msg, trpcStatus);
        CHK_STATUS(33,NOINFO_TRPC_ERROR,
        "TRPC error during db info at init");
    }
}

client_enrolled = 1;
MUTEX_UNLOCK(&init_lock);
err_printf("end of enroll_client\n");
}

/*-----*/

```

```

/* Read environment paramaters and registry entries */
/*-----*/
static void read_mon_environment()
{
    char *env_str;
    char *registryKey = "SOFTWARE\\TransarcCorporation\\TxTpc";
    HKEY hKey;
    DWORD size;
    DWORD type;
    char szTmp[256];

    cellName = getenv("ENCINA_TPM_CELL");
    CHECK_ENVIRON(cellName, "ENCINA_TPM_CELL");

    if (env_str = getenv("TPCC_ENV_RETRIEVE")) {
        envRetrieval = atoi(env_str);
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE, registryKey, 0,
KEY_READ, &hKey) != ERROR_SUCCESS )
        return;

    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "StatsFrequency", 0, &type, szTmp,
&size)==ERROR_SUCCESS)
        iStatsFrequency = atoi(szTmp);

    RegCloseKey(hKey);
}

```

## mon\_client.h

```

/*
 * mon_client.h
 */

#ifndef MON_CLIENT_H
#define MON_CLIENT_H

#define MUTEX_T CRITICAL_SECTION
#define MUTEX_LOCK(a) EnterCriticalSection(a)
#define MUTEX_UNLOCK(a) LeaveCriticalSection(a)
#define MUTEX_INIT(mut) InitializeCriticalSection(mut)
#define MUTEX_DESTROY(mut) DeleteCriticalSection(mut)
#define ERROUT errtpcc

/*initialization status */
#define INIT_SUCCESS 0
#define INIT_FAILED 1
#define CELL_NAME_UNAVAILABLE 2
#define MON_RETRIEVEENABLE_FAILED 3
#define MON_INITCLIENT_FAILED 4
#define MON_SECURITYSET_FAILED 5
#define MON_SETREFRESHINTERVAL_FAILED 6
#define NOINFO_TRPC_ERROR 7
#define ENROLL_CLIENT_EXCEPTION 8
#define ERROUT_FILE_NOT_FOUND 9
#define LOG_FILE_NOT_FOUND 10
#define TPCC_KEY_NOT_FOUND 11
#define TERM_ALLOC_FAILED 12

/*
 * Routines and declarations that are common to all clients
 */
#ifdef __cplusplus
extern "C" {

```

```

#endif
int send_new_order(long, unsigned char *);
int send_payment(long, unsigned char *);
int send_order_status(long, unsigned char *);
int send_delivery(long, unsigned char *);
int send_stock_level(long, unsigned char *);
void enroll_client();
#ifdef __cplusplus
}
#endif

```

```
#endif /* MON_CLIENT_H */
```

## ReadRegistry.cpp

```

/* FILE: READREGISTRY.CPP
 * Microsoft TPC-C Kit Ver.
 * 4.20.000
 * Copyright Microsoft, 1999
 * All Rights Reserved
 *
 * not yet audited
 *
 * PURPOSE: Implementation for TPC-C Tuxedo class.
 * Contact: Charles Levine (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - first version
 */

```

```
/* FUNCTION: ReadTPCCRegistrySettings
```

```

 *
 * PURPOSE: This function reads the NT registry for startup
parameters. There parameters are
 *
 * under the TPCC key.
 *

```

```

 * RETURNS FALSE = no errors
 * TRUE = error reading registry
 */

```

```

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg )
{

```

```

    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

```

```

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
        return TRUE;

```

```

    // determine database protocol to use; may be either ODBC or

```

```

    DBLIB

```

```

    pReg->eDB_Protocol = Unspecified;
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "DB_Protocol", 0, &type, (BYTE
*)&szTmp, &size) == ERROR_SUCCESS )
    {

```

```

        if ( !strcmp(szTmp, szDBNames[ODBC]) )
            pReg->eDB_Protocol = ODBC;
        else if ( !strcmp(szTmp, szDBNames[DBLIB]) )
            pReg->eDB_Protocol = DBLIB;
    }

```

```

    pReg->eTxnMon = None;

```

```

// determine txn monitor to use; may be either TUXEDO, or blank
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "TxnMonitor", 0, &type, (BYTE
*)&szTmp, &size) == ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, szTxnMonNames[TUXEDO]) )
        pReg->eTxnMon = TUXEDO;
    else if ( !strcmp(szTmp, szTxnMonNames[ENCINA]) )
        pReg->eTxnMon = ENCINA;
    else if ( !strcmp(szTmp, szTxnMonNames[COM]) )
        pReg->eTxnMon = COM;
}

pReg->bCOM_SinglePool = FALSE;
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "COM_SinglePool", 0, &type, (BYTE
*)&szTmp, &size) == ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, "YES") )
        pReg->bCOM_SinglePool = TRUE;
}

pReg->dwMaxConnections = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "MaxConnections", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxConnections = dwTmp;

pReg->dwMaxPendingDeliveries = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "MaxPendingDeliveries", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxPendingDeliveries = dwTmp;

pReg->dwNumberOfDeliveryThreads = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "NumberOfDeliveryThreads", 0,
&type, (LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwNumberOfDeliveryThreads = dwTmp;

size = sizeof( pReg->szPath );
if ( RegQueryValueEx(hKey, "Path", 0, &type, (BYTE
*)&pReg->szPath, &size) != ERROR_SUCCESS )
    pReg->szPath[0] = 0;

size = sizeof( pReg->szDbServer );
if ( RegQueryValueEx(hKey, "DbServer", 0, &type, (BYTE
*)&pReg->szDbServer, &size) != ERROR_SUCCESS )
    pReg->szDbServer[0] = 0;

size = sizeof( pReg->szDbName );
if ( RegQueryValueEx(hKey, "DbName", 0, &type, (BYTE
*)&pReg->szDbName, &size) != ERROR_SUCCESS )
    pReg->szDbName[0] = 0;

size = sizeof( pReg->szDbUser );
if ( RegQueryValueEx(hKey, "DbUser", 0, &type, (BYTE
*)&pReg->szDbUser, &size) != ERROR_SUCCESS )
    pReg->szDbUser[0] = 0;

size = sizeof( pReg->szDbPassword );
if ( RegQueryValueEx(hKey, "DbPassword", 0, &type, (BYTE
*)&pReg->szDbPassword, &size) != ERROR_SUCCESS )
    pReg->szDbPassword[0] = 0;

```

```
RegCloseKey(hKey);
```

```
return FALSE;
```

## ReadRegistry.h

```

/* FILE: ReadRegistry.h
Microsoft TPC-C Kit Ver.
4.20.000
Copyright Microsoft, 1999
All Rights Reserved
not audited
PURPOSE: Header for registry related code.
Change history:
4.20.000 - first version
*/

enum DBPROTOCOL { Unspecified, ODBC, DBLIB };
const char *szDBNames[] = { "Unspecified", "ODBC", "DBLIB" };

enum TXNMON { None, TUXEDO, ENCINA, COM };
const char *szTxnMonNames[] = { "NONE", "TUXEDO", "ENCINA", "COM"
};

//This structure defines the data necessary to keep distinct for each terminal or
client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbServer[32];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg );

Resource.h

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//
#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TPCCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108
#define IDR_LICENSE1 112
#define IDD_DIALOG4 113
#define IDR_TPCCOBJ1 117
#define IDR_TPCCSTUB1 118

```

```

#define IDR_DBLIB_DLL          122
#define IDR_ODBC_DLL          123
#define IDR_TUXEDO_APP        124
#define IDR_TUXEDO_DLL        125
#define IDR_COM_DLL           126
#define IDR_COMPS_DLL         127
#define IDR_COMALL_DLL        128
#define IDR_COMTYPLIB_DLL     129
#define BN_LOG                 1001
#define ED_KEEP                1002
#define ED_THREADS             1003
#define ED_THREADS2            1004
#define IDC_PATH               1007
#define IDC_VERSION            1009
#define IDC_RESULTS            1010
#define IDC_PROGRESS1          1011
#define IDC_STATUS             1012
#define IDC_BUTTON1            1013
#define ED_MAXCONNECTION      1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_MAXDELIVERIES      1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB              1021
#define IDC_LICENSE             1022
#define IDC_ODBC                1022
#define IDC_CONNECT_POOL       1023
#define ED_DB_SERVER            1023
#define ED_USER_CONNECT_DELAY_TIME 1024
#define ED_DB_USER_ID          1024
#define IDC_MTS                 1025
#define IDC_TM_MTS              1025
#define IDC_TM_TUXEDO          1026
#define IDC_TM_NONE             1027
#define ED_DB_PASSWORD         1028
#define ED_DB_NAME              1029
#define IDC_TM_ENCINA          1030

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 130
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1031
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif
#endif

```

## Resource\_tpcrc.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcrc
//
#define IDD_DIALOG1            101

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

```
#endif
```

## rtetime.h

```

/* FILE: rtetime.h : header file
 * Copyright 1997 Microsoft Corp., All rights reserved.
 *
 * Authors: Charles Levine, Philip Durr
 *
 * Microsoft Corp.
 */

#define MAX_JULIAN_TIME
0x7FFFFFFF
#define JULIAN_TIME          _int64
#define TC_TIME              DWORD
extern "C"
{
    BOOL          InitJulianTime(LPSYSTEMTIME lpInitTime);
    JULIAN_TIME   GetJulianTime(void);
    DWORD         MyTickCount(void);
    void          GetJulianAndTC(JULIAN_TIME *pJulian, DWORD
    *pTC);
    JULIAN_TIME   ConvertTo64BitTime(int iYear, int iMonth, int iDay, int
    iHour, int iMinute, int iSecond);
    JULIAN_TIME   Get64BitTime(LPSYSTEMTIME lpInitTime);
    int           JulianDay( int yr, int mm, int dd );
    void          JulianToTime(JULIAN_TIME julianTS, int* yr, int*
    mm, int* dd, int *hh, int *mi, int *ss );
    void          JulianToCalendar( int day, int* yr, int* mm, int* dd );
}

```

## spinlock.h

```

/* FILE: SPINLOCK.H
 *
 * Copyright 1997 Microsoft Corp., All rights reserved.
 *
 * Authors: Mike Parkes, Charles Levine, Philip Durr
 *
 * Microsoft Corp.
 */

#ifdef _INC_Spinlock

    const LONG LockClosed      = 1;
    const LONG LockOpen       = 0;

/*****
 *
 * Spinlock and Semaphore locking.
 *
 * This class provides a very conservative locking scheme.
 * The assumption behind the code is that locks will be
 * held for a very short time. When a lock is taken a memory
 * location is exchanged. All other threads that want this
 * lock wait by spinning and sometimes sleeping on a semaphore
 * until it becomes free again. The only other choice is not
 * to wait at all and move on to do something else. This
 * module should normally be used in conjunction with cache
 * aligned memory in minimize cache line misses.
 *
 *****/

class Spinlock
{

```

```

// Private data.
HANDLE Semaphore;
volatile LONG m_Spinlock;
volatile LONG Waiting;

#ifdef _DEBUG
// Counters for debugging builds.
volatile LONG TotalLocks;
volatile LONG TotalSleeps;
volatile LONG TotalSpins;
volatile LONG TotalWaits;
#endif

public:
// Public functions.

Spinlock( void );

inline BOOL ClaimLock( BOOL Wait =
TRUE );

inline void ReleaseLock( void );
~Spinlock( void );
// Disabled operations.
Spinlock( const Spinlock & Copy );
void operator=( const Spinlock & Copy );

private:
// Private functions.
inline BOOL ClaimSpinlock( volatile LONG
*sl );

void WaitForLock( void );
void WakeAllSleepers( void );

};

/*****
*
* A guaranteed atomic exchange.
*
* An attempt is made to claim the Spinlock. This action is
* guaranteed to be atomic.
*
*****/

inline BOOL Spinlock::ClaimSpinlock( volatile LONG *Spinlock )
{
#ifdef _DEBUG
InterlockedIncrement( (LPLONG) &
TotalLocks );
#endif
return ( (*Spinlock) == LockOpen ) &&
( InterlockedExchange( (LPLONG)Spinlock, LockClosed ) == LockOpen );
}

/*****
*
* Claim the Spinlock.
*
* Claim the lock if available else wait or exit.
*
*****/

inline BOOL Spinlock::ClaimLock( BOOL Wait )
{
if ( ! ClaimSpinlock( (volatile LONG*) & m_Spinlock ) )
{
if ( Wait )

```

```

WaitForLock();
return Wait;
}
return TRUE;
}

/*****
*
* Release the Spinlock.
*
* Release the lock and if needed wakeup any sleepers.
*
*****/

inline void Spinlock::ReleaseLock( void )
{
m_Spinlock = LockOpen;
if ( Waiting > 0 )
WakeAllSleepers();
}

#define _INC_Spinlock
#endif

tpcc.cpp

/* FILE: TPCC.C
* Microsoft TPC-C Kit Ver.
4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
*
* Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
* PURPOSE: Main module for TPCC.DLL which is an
ISAPI service dll.
* Contact: Charles Levine (clevine@microsoft.com)
*
* Change history:
* 4.20.000 - reworked error handling; added options for
COM and Encina txn monitors
*/

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

```

```

#include "..\..\common\src\trans.h" //tpckit transaction
header contains definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"

#include "..\..\common\txnlog\include\rtetime.h"
#include "..\..\common\txnlog\include\spinlock.h"
#include "..\..\common\txnlog\include\txnlog.h"

// Database layer includes
#include "..\..\db_dblib_dll\src\tpcc_dblib.h" // DBLIB
implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h" // ODBC
implementation of TPC-C txns

// Txn monitor layer includes
#include "..\..\tm_com_dll\src\tpcc_com.h" // COM
Services implementation on TPC-C txns
#include "..\..\tm_tuxedo_dll\src\tpcc_tux.h" // interface to Tuxedo
libraries
#include "..\..\tm_encina_dll\src\tpcc_enc.h" // interface to Encina
libraries

#include "httpext.h" //ISAPI DLL
information header
#include "tpcc.h" //this dlls
specific structure, value e.t. header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char
szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version level of this web
client interface.
// The RTE must be synchronized with the interface level on login, otherwise
the login
// will fail. This is a sanity check to catch problems resulting from mismatched
versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "410"

static CRITICAL_SECTION TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_TUXEDO *pCTPCC_TUXEDO_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_post_init;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog *txnDelilog = NULL;
//used to log delivery transaction information

HANDLE hWorkerSemaphore =
INVALID_HANDLE_VALUE;
HANDLE hDoneEvent
= INVALID_HANDLE_VALUE;
HANDLE *pDeliHandles
= NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD
dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection;
//critical section for delivery transactions cache
DELIVERY_TRANSACTION *pDelBuff = NULL;
DWORD dwDelBuffSize
= 100; // size of circular buffer for delivery txns
DWORD dwDelBuffFreeCount;
// number of buffers free
DWORD dwDelBuffBusyIndex =
0; // index position of entry waiting to be delivered
DWORD dwDelBuffFreeIndex =
0; // index position of unused entry

#include "..\..\common\src\ReadRegistry.cpp"

/* FUNCTION: DIIMain
*
* PURPOSE: This function is the entry point for the DLL. This
implementation is based on the
* fact that DLL_PROCESS_ATTACH is only
called from the inet service once.
*
* ARGUMENTS: HANDLE hModule
module handle
DWORD ul_reason_for_call
reason for call
LPVOID lpReserved
reserved for future use
*
* RETURNS: BOOL FALSE
errors occurred in initialization
TRUE
DLL successfully initialized
*/

BOOL APIENTRY DIIMain(HANDLE hModule, DWORD ul_reason_for_call,
LPVOID lpReserved)
{
DWORD i;
char szEvent[LEN_ERR_STRING] = "\0";
char szLogFile[128];
char szDllName[128];

// debugging...
// DebugBreak();

try
{
switch(ul_reason_for_call)
{
case DLL_PROCESS_ATTACH:
DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;
GetComputerName(szMyComputerName, &dwSize);

```

```

szMyComputerName[dwSize] = 0;
    }

DisableThreadLibraryCalls((HMODULE)hModule);

InitializeCriticalSection(&TermCriticalSection);

    if ( ReadTPCCRegistrySettings(
&Reg ) )
        throw new
CWEBCLNT_ERR( ERR_MISSING_REGISTRY_ENTRIES );

        dwDelBuffSize = min(
Reg.dwMaxPendingDeliveries, 10000 ); // min with 10000 as a sanity
constraint
        dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with 100 as a sanity constraint

        TermInit();

        // load DLL for txn monitor
        if (Reg.eTxnMon == TUXEDO)
        {
            strcpy( szDllName,
Reg.szPath );
            strcat( szDllName,
"tpcc_tuxedo.dll");
            LoadLibrary( szDllName );
            if (hLibInstanceTm ==
NULL)
                throw new
CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );

            // get function pointer
to wrapper for class constructor

pCTPCC_TUXEDO_new = (TYPE_CTPCC_TUXEDO*)
GetProcAddress(hLibInstanceTm,"CTPCC_TUXEDO_new");
            if
(pCTPCC_TUXEDO_new == NULL)
                throw new
CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
GetLastError() );
        }
        else if (Reg.eTxnMon ==
ENCINA)
        {
            strcpy( szDllName,
Reg.szPath );
            strcat( szDllName,
"tpcc_encina.dll");
            LoadLibrary( szDllName );
            if (hLibInstanceTm ==
NULL)
                throw new
CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );

            // get function pointer
to wrapper for class constructor

pCTPCC_ENCINA_new = (TYPE_CTPCC_ENCINA*)
GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_new");

pCTPCC_ENCINA_post_init = (TYPE_CTPCC_ENCINA*)
GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_post_init");

```

```

            if
(pCTPCC_ENCINA_new == NULL)
                throw new
CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
GetLastError() );
        }
        else if (Reg.eTxnMon == COM)
        {
            strcpy( szDllName,
Reg.szPath );
            strcat( szDllName,
"tpcc_com.dll");
            LoadLibrary( szDllName );
            if (hLibInstanceTm ==
NULL)
                throw new
CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );

            // get function pointer
to wrapper for class constructor

pCTPCC_COM_new =
(TYPE_CTPCC_COM*)
GetProcAddress(hLibInstanceTm,"CTPCC_COM_new");
            if
(pCTPCC_COM_new == NULL)
                throw new
CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
GetLastError() );
        }

        // load DLL for database
connection
        if ((Reg.eTxnMon == None) ||
(dwNumDeliveryThreads > 0))
        {
            if (Reg.eDB_Protocol
== DBLIB)
            {
                strcpy(
szDllName, Reg.szPath );
                strcat(
szDllName, "tpcc_dblib.dll");
                hLibInstanceDb = LoadLibrary( szDllName );
                if
(hLibInstanceDb == NULL)
                    throw new CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName,
GetLastError() );

                // get
function pointer to wrapper for class constructor

pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
GetProcAddress(hLibInstanceDb,"CTPCC_DBLIB_new");
                if
(pCTPCC_DBLIB_new == NULL)
                    throw new CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
GetLastError() );
            }
            else if
{
                strcpy(
szDllName, Reg.szPath );

```

<pre> szDllName, "tpcc_odbc.dll"); hLibInstanceDb = LoadLibrary( szDllName ); (hLibInstanceDb == NULL) throw new CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );  function pointer to wrapper for class constructor pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*) GetProcAddress(hLibInstanceDb,"CTPCC_ODBC_new"); (pCTPCC_ODBC_new == NULL) throw new CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName, GetLastError() ); } if (dwNumDeliveryThreads) { // for deferred delivery txns: hDoneEvent = CreateEvent( NULL, TRUE /* manual reset */, FALSE /* initially not signalled */, NULL ); InitializeCriticalSection(&amp;DelBuffCriticalSection); hWorkerSemaphore = CreateSemaphore( NULL, 0, dwDelBuffSize, NULL ); dwDelBuffFreeCount = dwDelBuffSize; InitJulianTime(NULL); // create unique log file name based on delilog-yymmdd-hhmm.log SYSTEMTIME Time; GetLocalTime( &amp;Time ); wsprintf( szLogFile, "%sdelivery-%2.2d%2.2d%2.2d-%2.2d%2.2d.log", Reg.szPath, Time.wYear % 100, Time.wMonth, Time.wDay, Time.wHour, Time.wMinute ); txxDelilog = new CTxnLog(szLogFile, TXN_LOG_WRITE); //write event into txn log for START txxDelilog-&gt;WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName, sizeof(szMyComputerName)); // allocate structures for delivery buffers and thread mgmt pDeliHandles = new HANDLE[dwNumDeliveryThreads]; pDelBuff = new DELIVERY_TRANSACTION[dwDelBuffSize]; // launch DeliveryWorkerThread to perform actual delivery txns for(i=0; i&lt;dwNumDeliveryThreads; i++) </pre>	<pre> strcat( { pDeliHandles[i] = (HANDLE) _beginthread( DeliveryWorkerThread, 0, NULL ); if if (pDeliHandles[i] == INVALID_HANDLE_VALUE) throw new CWEBCLNT_ERR( ERR_DELIVERY_THREAD_FAILED ); } } break; case DLL_PROCESS_DETACH: if (dwNumDeliveryThreads) { if (txxDelilog != NULL) { //write event into txn log for STOP txxDelilog-&gt;WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName, sizeof(szMyComputerName)); // This will do a clean shutdown of the delivery log file CTxnLog *txxDelilogLocal = txxDelilog; txxDelilog= NULL; delete txxDelilogLocal; } delete [] pDeliHandles; delete [] pDelBuff; CloseHandle( CloseHandle( DeleteCriticalSection(&amp;DelBuffCriticalSection); } DeleteCriticalSection(&amp;TermCriticalSection); if (hLibInstanceTm != NULL) FreeLibrary( hLibInstanceTm ); hLibInstanceTm = NULL; if (hLibInstanceDb != NULL) FreeLibrary( hLibInstanceDb ); hLibInstanceDb = NULL; Sleep(500); break; default: /* nothing */; } } catch (CBaseErr *e) { </pre>
--	---



```

        WriteMessageToEventLog( e->ErrorText() );
        delete e;
        TerminateExtension(0);
        return FALSE;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception. DLL could not load.));
        TerminateExtension(0);
        return FALSE;
    }

    return TRUE;
}

/* FUNCTION: GetExtensionVersion
*
* PURPOSE:      This function is called by the inet service when the DLL
is first loaded.
*
* ARGUMENTS:   HSE_VERSION_INFO      *pVer    passed in
structure in which to place expected version number.
*
* RETURNS:     TRUE      inet service expected return value.
*/

BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO *pVer)
{
    pVer->dwExtensionVersion =
    MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpy(pVer->lpszExtensionDesc, "TPC-C Server.",
HSE_MAX_EXT_DLL_NAME_LEN);

    // TODO: why do we need this here instead of in the DLL attach?
    if (Reg.eTxnMon == ENCINA)
        pCTPCC_ENCINA_post_init();

    return TRUE;
}

/* FUNCTION: TerminateExtension
*
* PURPOSE:      This function is called by the inet service when the DLL
is about to be unloaded.
*
*               Release all resources in anticipation of being
unloaded.
*
* RETURNS:     TRUE      inet service expected return value.
*/

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0; i<dwNumDeliveryThreads; i++)
            WaitForSingleObject( pDeliHandles[i],
INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc

```

```

*
* PURPOSE:      This function is the main entry point for the TPCC DLL.
The internet service
                calls this function passing in the http string.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK      *pECB
structure pointer to passed in internet
                service information.
*
* RETURNS:     DWORD HSE_STATUS_SUCCESS
connection can be dropped if error
*
HSE_STATUS_SUCCESS_AND_KEEP_CONN      keep connect valid
comment sent
*
* COMMENTS:    None
*/

DWORD WINAPI HttpExtensionProc(EXTENSION_CONTROL_BLOCK
*pECB)
{
    int                iCmd, FormId, TermId, iSyncId;
    char               szBuffer[4096];

    int                lpbSize;
    static char        szHeader[] = "200 Ok";
    DWORD              dwSize = 6;                // initial
value is strlen(szHeader)
    char               szHeader1[4096];

#ifdef ICECAP
    StartCAP();
#endif

    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd, &FormId, &TermId,
&iSyncId);

        if (TermId != 0)
        {
            if ( TermId < 0 || TermId >=
Term.iNumEntries || Term.pClientData[TermId].iNextFree != -1 )
            {
                // debugging...
                char szTmp[128];
                sprintf( szTmp, "Invalid term ID;
TermId = %d", TermId );
                WriteMessageToEventLog( szTmp

                throw new CWEBCLNT_ERR(
ERR_INVALID_TERMID );
            }

            //must have a valid syncid here since termid is
valid
            if (iSyncId !=
Term.pClientData[TermId].iSyncId)
                throw new CWEBCLNT_ERR(
ERR_INVALID_SYNC_CONNECTION );

            //set use time

```

```

        Term.pClientData[TermId].iTickCount =
GetTickCount();
    }

    switch(iCmd)
    {
    case 0:
        WelcomeForm(pECB, szBuffer);
        break;
    case 1:
        switch( FormId )
        {
            case WELCOME_FORM:
            case MAIN_MENU_FORM:
                break;
            case NEW_ORDER_FORM:
                ProcessNewOrderForm(pECB, TermId, szBuffer);
                break;
            case PAYMENT_FORM:
                ProcessPaymentForm(pECB, TermId, szBuffer);
                break;
            case DELIVERY_FORM:
                ProcessDeliveryForm(pECB, TermId, szBuffer);
                break;
            case ORDER_STATUS_FORM:
                ProcessOrderStatusForm(pECB, TermId, szBuffer);
                break;
            case STOCK_LEVEL_FORM:
                ProcessStockLevelForm(pECB, TermId, szBuffer);
                break;
        }
        break;
    case 2:
        // new-order selected from menu; display
        new-order input form
        INPUT_FORM, szBuffer);
        MakeNewOrderForm(TermId, NULL,
        break;
    case 3:
        // payment selected from menu; display
        payment input form
        INPUT_FORM, szBuffer);
        MakePaymentForm(TermId, NULL,
        break;
    case 4:
        // delivery selected from menu; display
        delivery input form
        INPUT_FORM, szBuffer);
        MakeDeliveryForm(TermId, NULL,
        break;
    case 5:
        // order-status selected from menu; display
        order-status input form
        INPUT_FORM, szBuffer);
        MakeOrderStatusForm(TermId, NULL,
        break;
    case 6:
        // stock-level selected from menu; display
        stock-level input form
        INPUT_FORM, szBuffer);
        MakeStockLevelForm(TermId, NULL,
        break;
    case 7:
        // ExitCmd
        TermDelete(TermId);
        WelcomeForm(pECB, szBuffer);
        break;
    case 8:
        SubmitCmd(pECB, szBuffer);
        break;
    case 9:
        // menu
        MakeMainMenuForm(TermId,
        Term.pClientData[TermId].iSyncId, szBuffer);
        break;
    case 10:
        // CMD=Clear
        // resets all connections; should only be used
        when no other connections are active
        TermDeleteAll();
        TermInit();
        WelcomeForm(pECB, szBuffer);
        break;
    case 11:
        // CMD=Stats
        StatsCmd(pECB, szBuffer);
        break;
    }
    catch (CBaseErr *e)
    {
        ErrorForm( pECB, e->ErrorType(), e->ErrorNum(),
        TermId, iSyncId, e->ErrorText(), szBuffer );
        delete e;
    }
    catch (...)
    {
        ErrorForm( pECB, ERR_TYPE_WEBDLL, 0, TermId,
        iSyncId, "Error: Unhandled exception in Web Client.", szBuffer );
    }
}

#ifdef ICECAP
    StopCAP();
#endif

    lpbSize = strlen(szBuffer);
    wsprintf(szHeader1,
        "Content-Type: text/html\r\n"
        "Content-Length: %d\r\n"
        "Connection: Keep-Alive\r\n\r\n", lpbSize);
    strcat( szHeader1, szBuffer );

    (*pECB->ServerSupportFunction)(pECB->ConnID,
    HSE_REQ_SEND_RESPONSE_HEADER, szHeader, (LPDWORD) &dwSize,
    (LPDWORD)szHeader1);

    //finish up and keep connection
    pECB->dwHttpStatusCode = 200;
    return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //

```

```

hEventSource = RegisterEventSource(NULL, TEXT("TPCC.DLL"));

_stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
lpszStrings[0] = szMsg;
lpszStrings[1] = lpszMsg;

if (hEventSource != NULL)
{
    ReportEvent(hEventSource, // handle of event source
    EVENTLOG_ERROR_TYPE, // event type
    0, // event category
    0, // event ID
    NULL, // current user's SID
    2, // strings in lpszStrings
    0, // no bytes of raw data
    (LPCTSTR *)lpszStrings, // array of error strings
    NULL); // no raw data

    (VOID) DeregisterEventSource(hEventSource);
}
}

/* FUNCTION: DeliveryWorkerThread
*
* PURPOSE: This function processes deferred delivery txns. There are
typically several
* threads running this routine. The number of
threads is determined by an entry
* read from the registry. The thread waits for
work by waiting on semaphore.
* When a delivery txn is posted, the semaphore
is released. After processing
* the delivery txn, information is logged to
record the txn status and execution
* time.
*/

/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE *pTxn = NULL;

    DELIVERY_TRANSACTION delivery;
    PDELIVERY_DATA
pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF txnDeliRec;

    DWORD index;
    HANDLE handles[2];

    SYSTEMTIME trans_end; //delivery
transaction finished time
    SYSTEMTIME trans_start; //delivery transaction
start time

    assert(txnDeliRec != NULL);

    try
    {
        if (Reg.eDB_Protocol == ODBC)
            pTxn = pCTPCC_ODBC_new(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword, szMyComputerName,
Reg.szDbName);
        else if (Reg.eDB_Protocol == DBLIB)
            pTxn = pCTPCC_DBLIB_new(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword, szMyComputerName,
Reg.szDbName);
        pDeliveryData = pTxn->BuffAddr_Delivery();

```

```

}
catch (CBaseErr *e)
{
    char szTmp[1024];
    wsprintf( szTmp, "Error in Delivery Txn thread. Could
not connect to database. "
"%s. Server=%s, User=%s,
Password=%s, Database=%s",
e->ErrorText(), Reg.szDbServer,
Reg.szDbUser, Reg.szDbPassword, Reg.szDbName);
    WriteMessageToEventLog( szTmp);
    delete e;
    goto ErrorExit;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled exception
caught in DeliveryWorkerThread.));
    goto ErrorExit;
}

while (TRUE)
{
    try
    {
        //while delivery thread running, i.e. user has
not requested termination
        while (TRUE)
        {
            // need to wait for multiple objects:
            handles[0] = hDoneEvent;
            handles[1] = hWorkerSemaphore;
            index = WaitForMultipleObjects(
2, &handles[0], FALSE, INFINITE);
            if (index == WAIT_OBJECT_0)
                goto ErrorExit;

            ZeroMemory(&txnDeliRec,
sizeof(txnDeliRec));
            txnDeliRec.TxnType =
TXN_REC_TYPE_TPCC_DELIV_DEF;

            // make a local copy of current
entry from delivery buffer and increment buffer index
            EnterCriticalSection(&DelBuffCriticalSection);
            delivery =
*(pDelBuff+dwDelBuffBusyIndex);
            dwDelBuffFreeCount++;
            dwDelBuffBusyIndex++;
            if (dwDelBuffBusyIndex ==
dwDelBuffSize) // wrap-around if at end of buffer
                dwDelBuffBusyIndex =
0;

            LeaveCriticalSection(&DelBuffCriticalSection);

            pDeliveryData->w_id =
delivery.w_id;
            pDeliveryData->o_carrier_id =
delivery.o_carrier_id;
            txnDeliRec.w_id =
pDeliveryData->w_id;
            txnDeliRec.o_carrier_id =
pDeliveryData->o_carrier_id;

```

```

Get64BitTime(&delivery.queue);          txnDeliRec.TxnStartT0 =

                                        GetLocalTime( &trans_start );
                                        pTxn->Delivery();
                                        GetLocalTime( &trans_end );

                                        //log txn
                                        txnDeliRec.TxnStatus =

ERR_SUCCESS;                            for (int i=0; i<10; i++)
                                        txnDeliRec.o_id[i] =

pDeliveryData->o_id[i];                  txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) - txnDeliRec.TxnStartT0);
                                        txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) - Get64BitTime(&trans_start));

                                        if (txnDelilog != NULL)

txnDelilog->WriteToLog(&txnDeliRec);
                                        }
                                        catch (CBaseErr *e)
                                        {
                                        char szTmp[1024];
                                        wsprintf( szTmp, "Error in Delivery Txn
thread. %s", e->ErrorText() );
                                        WriteMessageToEventLog( szTmp );

                                        // log the error txn
                                        txnDeliRec.TxnStatus = e->ErrorType();
                                        if (txnDelilog != NULL)

txnDelilog->WriteToLog(&txnDeliRec);

                                        delete e;
                                        }
                                        catch (...)
                                        {
                                        // unhandled exception; shouldn't happen; not
much we can do...

WriteMessageToEventLog(TEXT("Unhandled exception caught in
DeliveryWorkerThread. "));
                                        }
                                        }

ErrorExit:
                                        delete pTxn;
                                        _endthread();
                                        }

/* FUNCTION: PostDeliveryInfo
*
* PURPOSE:          This function enters the delivery txn into the deferred
delivery buffer.
*
* RETURNS:          BOOL    FALSE    delivery information
posted successfully
*
*                   TRUE
error cannot post delivery info
*/

BOOL PostDeliveryInfo(short w_id, short o_carrier_id)
{
    BOOL bError;

```

```

EnterCriticalSection(&DelBuffCriticalSection);
if (dwDelBuffFreeCount > 0)
{
    bError = FALSE;
    (pDelBuff+dwDelBuffFreeIndex)->w_id
= w_id;
    (pDelBuff+dwDelBuffFreeIndex)->o_carrier_id
=
o_carrier_id;
GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)->queue);

    dwDelBuffFreeCount--;
    dwDelBuffFreeIndex++;
    if (dwDelBuffFreeIndex == dwDelBuffSize)
        dwDelBuffFreeIndex = 0;
//
wrap-around if at end of buffer
}
else
// No free buffers. Return an error, which indicates that
the delivery buffer is full.
// Most likely, the number of delivery worker threads
needs to be increased to keep up
// with the txn rate.
bError = TRUE;
LeaveCriticalSection(&DelBuffCriticalSection);

if (!bError)
// increment worker semaphore to wake up a worker
thread
    ReleaseSemaphore( hWorkerSemaphore, 1, NULL );

return bError;
}

/* FUNCTION: ProcessQueryString
*
* PURPOSE:          This function extracts the relevent information out of the
http command passed in from
the browser.
*
* COMMENTS:        If this is the initial connection i.e. client is at welcome
screen then
there will not be a terminal id or
current form id. If this is the case
then the pTermid and pFormid
return values are undefined.
*/

void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int
*pCmd, int *pFormId, int *pTermId, int *pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

//allowable client command strings i.e. CMD=command
static char *szCmds[] =
{
    "Process", "..NewOrder..", "..Payment..", "..Delivery..",
"..Order-Status..", "..Stock-Level..",
    "..Exit..", "Submit", "Menu", "Clear", "Stats", ""
};

    *pCmd = 0;
    *pTermId = 0;
// default is the login screen
// if no params (i.e., empty query string), then return login screen
if (strlen(pECB->lpszQueryString) == 0)

```



```

        sprintf( szTmp, "Please enter your Warehouse and District for
this session:<BR>"
                " <font face='Courier
New' color='blue'><PRE>" );
        strcat( szBuffer, szTmp);
        strcat( szBuffer, "Warehouse ID = <INPUT NAME='w_id'
SIZE=4><BR>"
                "District ID
= <INPUT NAME='d_id' SIZE=2><BR>"
                "</PRE></font><HR>"
                "<INPUT
TYPE='submit' NAME='CMD' VALUE='Submit'>"
                "</FORM></BODY></HTML>");
}
/* FUNCTION: SubmitCmd
*
* PURPOSE: This function allocated a new terminal id in the Term
structure array.
*
*/
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int iNewTerm;
    char *ptr = pECB->lpszQueryString;

    char szVersion[32] = { 0 };
    char szServer[32] = { 0 };
    char szUser[32] = "sa";
    char szPassword[32] = { 0 };
    char szDatabase[32] = "tpcc";

    // validate version field; the version field ensures that the RTE is
synchronized with the web client
    GetKeyValue(&ptr, "VERSION", szVersion, sizeof(szVersion),
ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCLNT_ERR(
ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server", szServer,
sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user", szUser, sizeof(szUser),
NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd", szPassword,
sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name", szDatabase,
sizeof(szDatabase), NO_ERR);
    }

    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCLNT_ERR( ERR_W_ID_INVALID
);

    // parse district ID

```

```

        int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
        if ( d_id < 1 || d_id > 10 )
            throw new CWEBCLNT_ERR( ERR_D_ID_INVALID
);

        iNewTerm = TermAdd();

        Term.pClientData[iNewTerm].w_id = w_id;
        Term.pClientData[iNewTerm].d_id = d_id;

        try
        {
            if (Reg.eTxnMon == TUXEDO)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_TUXEDO_new();
            else if (Reg.eTxnMon == ENCINA)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_ENCINA_new();
            else if (Reg.eTxnMon == COM)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
            else if (Reg.eDB_Protocol == ODBC)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword, szMyComputerName,
szDatabase );
            else if (Reg.eDB_Protocol == DBLIB)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_DBLIB_new( szServer, szUser, szPassword, szMyComputerName,
szDatabase );
        }
        catch (...)
        {
            TermDelete(iNewTerm);
            throw; // pass exception upward
        }

        MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
}
/* FUNCTION: StatsCmd
*
* PURPOSE: This function returns to the browser the total number of
active terminal ids.
*
* This routine is for development/debugging
purposes.
*
*/
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int i;
    int iTot;

    EnterCriticalSection(&TermCriticalSection);

    iTot = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            iTot++;
    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,

```

```

" <HTML><HEAD><TITLE>TPC-C Web
Client Stats</TITLE></HEAD>"
" <BODY><B><BIG> Total Active
Connections: %d </BIG></B><BR></BODY></HTML>"
, iTot);
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        {
            ERR_COMMAND_UNDEFINED,
            "Command undefined."
        },
        {
            ERR_D_ID_INVALID,
            "Invalid District ID Must be 1 to 10."
        },
        {
            ERR_DELIVERY_CARRIER_ID_RANGE,
            "Delivery Carrier ID out of range must be 1 - 10."
        },
        {
            ERR_DELIVERY_CARRIER_INVALID,
            "Delivery Carrier ID invalid must be numeric 1 - 10."
        },
        {
            ERR_DELIVERY_MISSING_OCD_KEY,
            "Delivery missing Carrier ID key \"OCD*\"."
        },
        {
            ERR_DELIVERY_THREAD_FAILED,
            "Could not start delivery worker thread."
        },
        {
            ERR_GETPROCADDR_FAILED,
            "Could not map proc in DLL. GetProcAddr
error. DLL="
        },
        {
            ERR_HTML_ILL_FORMED,
            "Required key field is missing from HTML string."
        },
        {
            ERR_INVALID_SYNC_CONNECTION,
            "Invalid Terminal Sync ID."
        },
        {
            ERR_INVALID_TERMID,
            "Invalid Terminal ID."
        },
        {
            ERR_LOADDLL_FAILED,
            "Load of DLL failed. DLL="
        },
        {
            ERR_MAX_CONNECTIONS_EXCEEDED,
            "No connections available. Max Connections is probably
too low."
        },
        {
            ERR_MISSING_REGISTRY_ENTRIES,
            "Required registry entries are missing. Rerun INSTALL to correct."
        },
        {
            ERR_NEWORDER_CUSTOMER_INVALID,
            "New Order customer id invalid data type, range = 1 to 3000."
        },
        {
            ERR_NEWORDER_CUSTOMER_KEY,
            "New Order missing Customer key \"CID*\"."
        },
        {
            ERR_NEWORDER_DISTRICT_INVALID,
            "New Order District ID Invalid range 1 - 10."
        },
        {
            ERR_NEWORDER_FORM_MISSING_DID,
            "New Order missing District key \"DID*\"."
        }
    }
}

```

```

{
    ERR_NEWORDER_ITEMID_INVALID,
    "New Order Item Id is wrong data type, must be numeric."
},
{
    ERR_NEWORDER_ITEMID_RANGE,
    "New Order Item Id is out of range. Range = 1 to
999999."
},
{
    ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
    "New Order
Item_Id field entered without a corresponding Supp_W."
},
{
    ERR_NEWORDER_MISSING_IID_KEY,
    "New Order missing Item Id key \"IID*\"."
},
{
    ERR_NEWORDER_MISSING_QTY_KEY,
    "New Order Missing Qty key \"Qty##*\"."
},
{
    ERR_NEWORDER_MISSING_SUPPW_KEY,
    "New Order missing Supp_W key \"SP##*\"."
},
{
    ERR_NEWORDER_NOITEMS_ENTERED,
    "New Order No order lines entered."
},
{
    ERR_NEWORDER_QTY_INVALID,
    "New Order Qty invalid must be numeric range 1 - 99."
},
{
    ERR_NEWORDER_QTY_RANGE,
    "New Order Qty is out of range. Range = 1 to
99."
},
{
    ERR_NEWORDER_QTY_WITHOUT_SUPPW,
    "New Order Qty field entered without a corresponding Supp_W."
},
{
    ERR_NEWORDER_SUPPW_INVALID,
    "New Order Supp_W invalid data type must be numeric."
},
{
    ERR_NO_SERVER_SPECIFIED,
    "No Server name specified."
},
{
    ERR_ORDERSTATUS_CID_AND_CLT,
    "Order Status Only Customer ID or Last Name may be entered, not
both."
},
{
    ERR_ORDERSTATUS_CID_INVALID,
    "Order Status Customer ID invalid, range must be numeric 1 -
3000."
},
{
    ERR_ORDERSTATUS_CLT_RANGE,
    "Order Status Customer last name longer than 16
characters."
},
{
    ERR_ORDERSTATUS_DID_INVALID,
    "Order Status District invalid, value must be numeric 1 - 10."
},
{
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    "Order
Status Either Customer ID or Last Name must be entered."
},
{
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    "Order
Status missing Customer key \"CID*\"."
},
{
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    "Order
Status missing Customer Last Name key \"CLT*\"."
},
{
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    "Order
Status missing District key \"DID*\"."
}
}

```

```

        {
            ERR_PAYMENT_CDI_INVALID,
            "Payment Customer district invalid must be numeric."
        },
        {
            ERR_PAYMENT_CID_AND_CLT,
            "Payment Only Customer ID or Last Name may be
entered, not both."
        },
        {
            ERR_PAYMENT_CUSTOMER_INVALID,
            "Payment Customer data type invalid, must be numeric."
        },
        {
            ERR_PAYMENT_CWI_INVALID,
            "Payment Customer Warehouse invalid, must be
numeric."
        },
        {
            ERR_PAYMENT_DISTRICT_INVALID,
            "Payment District ID is invalid, must be 1 - 10."
        },
        {
            ERR_PAYMENT_HAM_INVALID,
            "Payment Amount invalid data type must be numeric."
        },
        {
            ERR_PAYMENT_HAM_RANGE,
            "Payment Amount out of range, 0 - 9999.99."
        },
        {
            ERR_PAYMENT_LAST_NAME_TO_LONG,
            "Payment Customer last name longer than 16 characters."
        },
        {
            ERR_PAYMENT_MISSING_CDI_KEY,
            "Payment missing Customer district key \"CDI*\"."
        },
        {
            ERR_PAYMENT_MISSING_CID_CLT,
            "Payment Either Customer ID or Last Name must be entered."
        },
        {
            ERR_PAYMENT_MISSING_CID_KEY,
            "Payment missing Customer Key \"CID*\"."
        },
        {
            ERR_PAYMENT_MISSING_CLT_KEY,
            "Payment missing Customer Last Name key \"CLT*\"."
        },
        {
            ERR_PAYMENT_MISSING_CWI_KEY,
            "Payment missing Customer Warehouse key \"CWI*\"."
        },
        {
            ERR_PAYMENT_MISSING_DID_KEY,
            "Payment missing District Key \"DID*\"."
        },
        {
            ERR_PAYMENT_MISSING_HAM_KEY,
            "Payment missing Amount key \"HAM*\"."
        },
        {
            ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
            "Stock Level; missing Threshold key \"TT*\"."
        },
        {
            ERR_STOCKLEVEL_THRESHOLD_INVALID,
            "Stock Level; Threshold value must be in the range = 1 - 99."
        },
        {
            ERR_STOCKLEVEL_THRESHOLD_RANGE,
            "Stock Level Threshold out of range, range must be 1 - 99."
        },
        {
            ERR_VERSION_MISMATCH,
            "Invalid version field. RTE and Web Client are probably
out of sync."
        },
        {
            ERR_W_ID_INVALID,
            "Invalid Warehouse ID."
        },
        {
            0,
            ""
        }
    }

```

```

    };
    char szTmp[256];
    int i = 0;
    while (TRUE)
    {
        if (errorMsgs[i].szMsg[0] == 0)
        {
            strcpy( szTmp, "Unknown error number." );
            break;
        }
        if (m_Error == errorMsgs[i].iError)
        {
            strcpy( szTmp, errorMsgs[i].szMsg );
            break;
        }
        i++;
    }
    if (m_szTextDetail)
        strcat( szTmp, m_szTextDetail );
    if (m_SystemErr)
        sprintf( szTmp+strlen(szTmp), " Error=%d",
m_SystemErr );

    m_szErrorText = new char[strlen(szTmp)+1];
    strcpy( m_szErrorText, szTmp );
    return m_szErrorText;
}

/* FUNCTION: GetKeyValue
*
* PURPOSE:      This function parses a http formatted string for specific
key values.
*
* ARGUMENTS:   char                *pQueryString
http string from client browser
*
* pKey          char                key value to look for
*
* pValue        char                character array into which to place key's value
*
* iMax          int                maximum length of key value array.
*
* err           WEBERROR           error value to throw
*
* RETURNS:     nothing.
*
* ERROR:       if (the pKey value is not found) then
if (err == 0)
return
(empty string)
else
throw
CWEBCLNT_ERR(err)
*
* COMMENTS:    http keys are formatted either KEY=value& or
KEY=value\0. This DLL formats
TPC-C input fields in such a
manner that the keys can be extracted in the
above manner.
*/

void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax,
WEBERROR err)
{
    char *ptr;

```



```

if ( !(ptr=strstr(*pQueryString, pKey)) )
    goto ErrorExit;
ptr += strlen(pKey);
if ( *ptr != '=' )
    goto ErrorExit;
ptr++;

iMax--; // one position is for terminating null
while( *ptr && *ptr != '&' && iMax )
{
    *pValue++ = *ptr++;
    iMax--;
}
*pValue = 0; // terminating null

*pQueryString = ptr;
return;

ErrorExit:
if (err != NO_ERR)
    throw new CWEBCLNT_ERR( err );
*pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
*
* PURPOSE:      This function parses a http formatted string for a specific
key value.
*
* ARGUMENTS:   char                *pQueryString
http string from client browser
*
* pKey         char
key value to look for
*
* NoKeyErr     WEBERROR
error value to throw if key not found
*
* NotIntErr    WEBERROR
error value to throw if value not numeric
*
* RETURNS:    integer
*
* ERROR:      if (the pKey value is not found) then
if (NoKeyErr !=
NO_ERR)
throw
CWEBCLNT_ERR(err)
*
* else
return 0
*
* else if (non-numeric char found)
then
*
* if (NotIntErr !=
NO_ERR) then
throw
CWEBCLNT_ERR(err)
*
* else
return 0
*
* COMMENTS:   http keys are formatted either KEY=value& or
KEY=value0. This DLL formats
*
* TPC-C input fields in such a
manner that the keys can be extracted in the
*
* above manner.
*/

int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR
NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;

```

```

char *ptr;

if ( !(ptr=strstr(*pQueryString, pKey)) )
    goto ErrorNoKey;
ptr += strlen(pKey);
if ( *ptr != '=' )
    goto ErrorNoKey;
ptr++;

ptr0 = ptr; // remember starting point
// scan string until a terminator (null or &) or a non-digit
while( *ptr && *ptr != '&' && isdigit(*ptr) )
    ptr++;

// make sure we stopped scanning for the right reason
if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
{
    if (NotIntErr != NO_ERR)
        throw new CWEBCLNT_ERR( NoKeyErr );
    return 0;
}

*pQueryString = ptr;
return atoi(ptr0);

ErrorNoKey:
if (NoKeyErr != NO_ERR)
    throw new CWEBCLNT_ERR( NoKeyErr );
return 0;
}

/* FUNCTION: TermInit
*
* PURPOSE:      This function initializes the client terminal structure; it is
called when the TPC.C.DLL
*
* is first loaded by the inet service.
*
*/

void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries = Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries * sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR(
ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData, Term.iNumEntries *
sizeof(CLIENTDATA) );

    Term.iFreeList = Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets set to -1, which marks it
as "in use".
    // This is intentional, as the zero entry is used as an anchor and
never
    // allocated as an actual terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree = i-1;

```

```

        LeaveCriticalSection(&TermCriticalSection);
    }

/* FUNCTION: TermDeleteAll
 *
 * PURPOSE:      This function frees allocated resources associated with
the terminal structure.
 *
 * ARGUMENTS:   none
 *
 * RETURNS:     None
 *
 * COMMENTS:    This function is called only when the inet service unloads
the TPCC.DLL
 *
 */

void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            delete Term.pClientData[i].pTxn;
    }

    Term.iFreeList          = 0;
    Term.iNumEntries       = 0;
    if ( Term.pClientData )
        free(Term.pClientData);
    Term.pClientData       = NULL;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermAdd
 *
 * PURPOSE:      This function assigns a terminal id which is used to
identify a client browser.
 *
 * RETURNS:     int          assigned terminal id
 *
 */

int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;
        Term.pClientData[iNewTerm].iNextFree = -1; //
indicates this position is in use
    }
    else
    {
        // no open slots, so find the slot that hasn't been used in
the longest time and reuse it
        for(iNewTerm=1, i=1, iTickCount=0x7FFFFFFF;
i<Reg.dwMaxConnections; i++)

```

```

        {
            if (iTickCount >
Term.pClientData[i].iTickCount)
            {
                iTickCount =
Term.pClientData[i].iTickCount;
                iNewTerm = i;
            }
            // if oldest term is less than one minute old, it probably
means that more connections
// are being attempted than were specified as "Max
Connections" at install. In this case,
// do not bump existing connection; instead, return error
to requestor.
            if ((GetTickCount() - iTickCount) < 60000)
            {
                LeaveCriticalSection(&TermCriticalSection);
                throw new CWEBCLNT_ERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
            }

            Term.pClientData[iNewTerm].iTickCount = GetTickCount();
            Term.pClientData[iNewTerm].iSyncId = Term.iMasterSyncId++;
            Term.pClientData[iNewTerm].pTxn = NULL;

            LeaveCriticalSection(&TermCriticalSection);
            return iNewTerm;
        }
    }

/* FUNCTION: TermDelete
 *
 * PURPOSE:      This function makes a terminal entry in the Term array
available for reuse.
 *
 * ARGUMENTS:   int
id          Terminal id of client exiting
 *
 */

void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;

        // put onto free list
        EnterCriticalSection(&TermCriticalSection);

        Term.pClientData[id].iNextFree = Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
 */

void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int
iErrorNum, int iTermId, int iSyncId, char *szErrorText, char *szBuffer )
{
    wsprintf(szBuffer,
"<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
"<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"

```

```

VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="STATUSID\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="ERROR\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="FORMID\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="TERMIN\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="SYNCID\
VALUE="%d\ ">
" <BOLD>An Error Occurred</BOLD><BR><BR>
"%s"
"<BR><BR><HR>"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..NewOrder..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Payment..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Delivery..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Order-Status..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Stock-Level..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Exit..\">"
" </FORM></BODY></HTML>"
, iType, iErrorNum, MAIN_MENU_FORM, iTermId,
iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
*/

void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm)
{
    wsprintf(szForm,
" <HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
"Select Desired Transaction.<BR><HR>"
" <FORM ACTION="tpcc.dll" METHOD="GET">"
" <INPUT TYPE="hidden" NAME="STATUSID\
VALUE="0\ ">"
" <INPUT TYPE="hidden" NAME="ERROR\
VALUE="0\ ">"
" <INPUT TYPE="hidden" NAME="FORMID\
VALUE="%d\ ">"
" <INPUT TYPE="hidden" NAME="TERMIN\
VALUE="%d\ ">"
" <INPUT TYPE="hidden" NAME="SYNCID\
VALUE="%d\ ">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..NewOrder..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Payment..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Delivery..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Order-Status..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Stock-Level..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Exit..\">"
" </FORM></BODY></HTML>"
, MAIN_MENU_FORM, iTermId, iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*

```

```

* PURPOSE: This function constructs the Stock Level HTML page.
*
* COMMENTS: The internal client buffer is created when the terminal id
is assigned and should not
be freed except when the client
terminal id is no longer needed.
*/

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm)
{
    int c;

    c = wsprintf(szForm,
" <HTML><HEAD><TITLE>TPC-C Stock
Level</TITLE></HEAD><FORM ACTION="tpcc.dll"
METHOD="GET">"
" <INPUT TYPE="hidden" NAME="STATUSID\
VALUE="0\ ">"
" <INPUT TYPE="hidden" NAME="ERROR\
VALUE="0\ ">"
" <INPUT TYPE="hidden" NAME="FORMID\
VALUE="%d\ ">"
" <INPUT TYPE="hidden" NAME="TERMIN\
VALUE="%d\ ">"
" <INPUT TYPE="hidden" NAME="SYNCID\
VALUE="%d\ ">"
" <PRE><font face="Courier">
Stock-Level<BR>"
"Warehouse: %4.4d District: %2.2d<BR> <BR>",
STOCK_LEVEL_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id,
Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
"Stock Level Threshold: <INPUT
NAME="TT*" SIZE=2><BR> <BR>"
"low stock: </font><BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR>"
" <BR> <BR> <BR> <BR> <BR> <BR>
<BR></PRE><HR>"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="Process\ ">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="Menu\ ">"
" </FORM></HTML>" );
    }
    else
    {
        wsprintf(szForm+c,
"Stock Level Threshold: %2.2d<BR> <BR>"
"low stock: %3.3d</font> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR>"
" <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR></PRE><HR>"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..NewOrder..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Payment..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Delivery..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Order-Status..\">"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Stock-Level..\">"

```



```

pNewOrderData->o_entry_d.minute,
pNewOrderData->o_entry_d.second);
    }

    c += sprintf(szForm+c, "<BR>Customer: %4.4d
Name: %-16s Credit: %2s ",
                pNewOrderData->c_id,
pNewOrderData->c_last, pNewOrderData->c_credit);

    if ( bValid )
    {
        c += sprintf(szForm+c,
                    "%5.2f <BR>"
                    "Order
Number: %8.8d Number of Lines: %2.2d W_tax: %5.2f D_tax: %5.2f
<BR> <BR>"
                    " Supp_W
Item_Id Item Name Qty Stock B/G Price Amount<BR>",
                    100.0*pNewOrderData->c_discount,
                    pNewOrderData->o_id,
                    pNewOrderData->o_ol_cnt,
                    100.0 * pNewOrderData->w_tax,
                    100.0 * pNewOrderData->d_tax);

        for(i=0; i<pNewOrderData->o_ol_cnt; i++)
        {
            c += sprintf(szForm+c, " %4.4d
%6.6d %-24s %2.2d %3.3d %1.1s $%6.2f $%7.2f <BR>",
                pNewOrderData->OL[i].ol_supply_w_id,
                pNewOrderData->OL[i].ol_i_id,
                pNewOrderData->OL[i].ol_i_name,
                pNewOrderData->OL[i].ol_quantity,
                pNewOrderData->OL[i].ol_stock,
                pNewOrderData->OL[i].ol_brand_generic,
                pNewOrderData->OL[i].ol_i_price,
                pNewOrderData->OL[i].ol_amount );
        }
        else
        {
            c += sprintf(szForm+c,
                        "%Disc:<BR>"
                        "Order Number: %8.8d Number
of Lines: W_tax: D_tax:<BR> <BR>"
                        " Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>"
                        , pNewOrderData->o_id);

            i = 0;
        }

        strcpy( szForm+c, szBR, (15-i)*5 );
        c += (15-i)*5;

        if ( bValid )

```

```

Transaction committed.
        c += sprintf(szForm+c, "Execution Status:
Total: $%8.2f ",
                    pNewOrderData->total_amount);
    else
        c += sprintf(szForm+c, "Execution Status:
Total:");

        strcpy(szForm+c,
                "<BR></font></PRE><HR>"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..NewOrder..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Payment..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Delivery..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Order-Status..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Stock-Level..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Exit..\">"
                "</FORM></HTML>"
                );
    }
}

/* FUNCTION: MakePaymentForm
*
* COMMENTS: The internal client buffer is created when the terminal id
is assigned and should not
* be freed except when the client
terminal id is no longer needed.
*/

void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData,
                    BOOL blnInput, char *szForm)
{
    int c;

    c = sprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"
                "<FORM ACTION='\"tpcc.dll\" METHOD='\"GET\"'"
                "<INPUT TYPE='hidden' NAME='\"STATUSID\"'"
                VALUE='\"0\">"
                "<INPUT TYPE='hidden' NAME='\"ERROR\"'"
                VALUE='\"0\">"
                "<INPUT TYPE='hidden' NAME='\"FORMID\"'"
                VALUE='\"%d\">"
                "<INPUT TYPE='hidden' NAME='\"TERMINID\"'"
                VALUE='\"%d\">"
                "<INPUT TYPE='hidden' NAME='\"SYNCID\"'"
                VALUE='\"%d\">"
                "<PRE><font face='\"Courier\"'"
                Payment<BR>"
                "Date: "
                , PAYMENT_FORM, iTermId,
                Term.pClientData[iTermId].iSyncId);

    if ( !blnInput )
    {
        c += sprintf(szForm+c, "%2.2d-%2.2d-%4.4d
%2.2d:%2.2d:%2.2d",
                    pPaymentData->h_date.day,
                    pPaymentData->h_date.month,
                    pPaymentData->h_date.year,
                    pPaymentData->h_date.hour,
                    pPaymentData->h_date.minute,

```

```

        pPaymentData->h_date.second);
    }
    if ( bInput )
    {
        c += sprintf(szForm+c,
            "<BR> <BR>Warehouse: %4.4d"
            "          District: <INPUT
NAME=\"DID*\" SIZE=1><BR> <BR> <BR> <BR> <BR>"
            "Customer: <INPUT NAME=\"CID*\"
SIZE=4>"
            "Cust-Warehouse: <INPUT NAME=\"CWI*\"
SIZE=4> "
            "Cust-District: <INPUT NAME=\"CDI*\"
SIZE=1><BR>"
            "Name:          <INPUT
NAME=\"CLT*\" SIZE=16> Since:<BR>"
            "          Credit:<BR>"
            "          Disc:<BR>"
            "          Phone:<BR>"
            "<BR>"
            "Amount Paid:    $<INPUT
NAME=\"HAM*\" SIZE=7> New Cust-Balance:<BR>"
            "Credit Limit:<BR> <BR>Cust-Data: <BR>
<BR> <BR> <BR> <BR></font></PRE><HR>"
            " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Process\"><INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Menu\">"
            "</BODY></FORM></HTML>"
            , Term.pClientData[iTermId].w_id);
    }
    else
    {
        c += sprintf(szForm+c,
            "<BR> <BR>Warehouse: %4.4d
District: %2.2d<BR>"
            "%-20s          %-20s<BR>"
            "%-20s          %-20s<BR>"
            "%-20s %-2s %-5.5s-%4.4s    %-20s %-2s
%5.5s-%4.4s<BR> <BR>"
            "Customer: %4.4d Cust-Warehouse: %4.4d
Cust-District: %2.2d<BR>"
            "Name:  %-16s %-2s %-16s  Since:
%-2.2d-%2.2d-%4.4d<BR>"
            "          %-20s          Credit: %-2s<BR>"
            , Term.pClientData[iTermId].w_id,
            pPaymentData->d_id,
            pPaymentData->w_street_1,
            pPaymentData->w_street_2,
            pPaymentData->d_street_2,
            pPaymentData->w_city,
            pPaymentData->w_state, pPaymentData->w_zip, pPaymentData->w_zip+5,
            pPaymentData->d_city,
            pPaymentData->d_state, pPaymentData->d_zip, pPaymentData->d_zip+5,
            pPaymentData->c_id,
            pPaymentData->c_d_id,
            pPaymentData->c_first,
            pPaymentData->c_middle, pPaymentData->c_last,
            pPaymentData->c_since.day,
            pPaymentData->c_since.month, pPaymentData->c_since.year,
            pPaymentData->c_street_1,
            pPaymentData->c_credit
        );
        c += sprintf(szForm+c,

```

```

            "          %-20s          %%Disc:
%5.2f<BR>",
            pPaymentData->c_street_2,
            100.0*pPaymentData->c_discount);
        c += sprintf(szForm+c,
            "          %-20s %-2s %-5.5s-%4.4s    Phone:
%6.6s-%3.3s-%3.3s-%4.4s<BR> <BR>",
            pPaymentData->c_city,
            pPaymentData->c_state, pPaymentData->c_zip, pPaymentData->c_zip+5,
            pPaymentData->c_phone,
            pPaymentData->c_phone+6, pPaymentData->c_phone+9,
            pPaymentData->c_phone+12 );
        c += sprintf(szForm+c,
            "Amount Paid:    $%7.2f  New
Cust-Balance: $%14.2f<BR>"
            "Credit Limit:  $%13.2f<BR> <BR>"
            , pPaymentData->h_amount,
            pPaymentData->c_balance,
            pPaymentData->c_credit_lim
        );
        if ( pPaymentData->c_credit[0] == 'B' &&
            pPaymentData->c_credit[1] == 'C' )
            c += sprintf(szForm+c,
                "Cust-Data:
%-50.50s<BR>    %-50.50s<BR>    %-50.50s<BR>
%-50.50s<BR>",
                pPaymentData->c_data,
                pPaymentData->c_data+50, pPaymentData->c_data+100,
                pPaymentData->c_data+150 );
            else
                strcpy(szForm+c, "Cust-Data: <BR> <BR>
<BR> <BR>");
        strcat(szForm,
            " <BR></font></PRE><HR>"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Payment..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Delivery..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-Status..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">"
            "</BODY></FORM></HTML>");
    }
}
/* FUNCTION: MakeOrderStatusForm
*
* COMMENTS:   The internal client buffer is created when the terminal id
is assigned and should not
*             be freed except when the client
terminal id is no longer needed.
*/
void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA
*pOrderStatusData, BOOL bInput, char *szForm)
{
    int          i, c;

```



```

VALUE="%">"
    "<INPUT TYPE="hidden" NAME="SYNCID"
Delivery<BR>"
    "<PRE><font face="Courier">
        "Warehouse: %4.4d<BR> <BR>",
        (!bInput && (pDeliveryData->exec_status_code !=
eOK)) ? ERR_TYPE_DELIVERY_POST : 0,
        DELIVERY_FORM, iTermId,
Term.pClientData[iTermId].iSyncId, Term.pClientData[iTermId].w_id);

    if ( bInput )
    {
        strcpy( szForm+c,
                "Carrier Number: <INPUT NAME="OCD*"
SIZE=1><BR> <BR>"
                "Execution Status: <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR>"
                " <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> </font></PRE><HR>"
                "<INPUT TYPE="submit" NAME="CMD\"
VALUE="Process">"
                "<INPUT TYPE="submit" NAME="CMD\"
VALUE="Menu">"
                "</BODY></FORM></HTML>");
    }
    else
    {
        sprintf( szForm+c,
                "Carrier Number: %2.2d<BR> <BR>"
                "Execution Status: %s <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR>"
                " <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> </font></PRE>"
                "<HR><INPUT TYPE="submit"
NAME="CMD\" VALUE="..NewOrder..">"
                "<INPUT TYPE="submit" NAME="CMD\"
VALUE="..Payment..">"
                "<INPUT TYPE="submit" NAME="CMD\"
VALUE="..Delivery..">"
                "<INPUT TYPE="submit" NAME="CMD\"
VALUE="..Order-Status..">"
                "<INPUT TYPE="submit" NAME="CMD\"
VALUE="..Stock-Level..">"
                "<INPUT TYPE="submit" NAME="CMD\"
VALUE="..Exit..">"
                "</BODY></FORM></HTML>"
                , pDeliveryData->o_carrier_id,
                (pDeliveryData->exec_status_code == eOK) ?
"Delivery has been queued." : "Delivery Post Failed "
                );
    }
}

/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE:      This function gets and validates the input data from the
new order form
*
*               filling in the required input variables. it then
calls the SQLNewOrder
*               transaction, constructs the output form and
writes it back to client
*               browser.
*/

void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{

```

```

PNEW_ORDER_DATA          pNewOrder;

    pNewOrder =
Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();

    ZeroMemory(pNewOrder, sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id = Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString, pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder =
Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE:      This function gets and validates the input data from the
payment form
*               filling in the required input variables. It then
calls the SQLPayment
*               transaction, constructs the output form and
writes it back to client
*               browser.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK      *pECB
passed in structure pointer from inetsrv.
*               int
*               iTermId      client browser terminal id
*/

void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{
    PPAYMENT_DATA pPayment;

    pPayment =
Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id = Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString, pPayment);

    Term.pClientData[iTermId].pTxn->Payment();

    pPayment =
Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE:      This function gets and validates the input data from the
Order Status
*               form filling in the required input variables. It
then calls the
*               SQLOrderStatus transaction, constructs the
output form and writes it
*               back to client browser.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK      *pECB
passed in structure pointer from inetsrv.
*               int
*               iTermId      client browser terminal id
*/

```



```

*/
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA    pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn->BuffAddr_OrderStatus();
ZeroMemory(pOrderStatus, sizeof(ORDER_STATUS_DATA));
pOrderStatus->w_id = Term.pClientData[iTermId].w_id;
GetOrderStatusData(pECB->lpszQueryString, pOrderStatus);

    Term.pClientData[iTermId].pTxn->OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn->BuffAddr_OrderStatus();
MakeOrderStatusForm(iTermId, pOrderStatus, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE:      This function gets and validates the input data from the
delivery form
*
*               filling in the required input variables. It then
calls the PostDeliveryInfo
*
*               Api, The client is then informed that the
transaction has been posted.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK    *pECB
passed in structure pointer from inetsrv.
*
*               int
iTermId    client browser terminal id
*/

void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{
    char    *ptr = pECB->lpszQueryString;

    PDELIVERY_DATA pDelivery;

    pDelivery =
Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
ZeroMemory(pDelivery, sizeof(DELIVERY_DATA));
pDelivery->w_id = Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id    = GetIntKeyValue(&ptr, "OCD*",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALID);
    if ( pDelivery->o_carrier_id > 10 || pDelivery->o_carrier_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery->w_id,
pDelivery->o_carrier_id )
            pDelivery->exec_status_code =
eDeliveryFailed;
        else
            pDelivery->exec_status_code = eOK;
    }
    else // delivery is done synchronously if no delivery threads
configured

```

```

Term.pClientData[iTermId].pTxn->Delivery();

    pDelivery =
Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
MakeDeliveryForm(iTermId, pDelivery, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
*
* PURPOSE:      This function gets and validates the input data from the
Stock Level
*
*               form filling in the required input variables. It
then calls the
*
*               SQLStockLevel transaction, constructs the
output form and writes it
*
*               back to client browser.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK    *pECB
passed in structure pointer from inetsrv.
*
*               int
iTermId    client browser terminal id
*/

void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{
    char    *ptr = pECB->lpszQueryString;

    PSTOCK_LEVEL_DATA    pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn->BuffAddr_StockLevel();
ZeroMemory( pStockLevel, sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id = Term.pClientData[iTermId].w_id;
pStockLevel->d_id = Term.pClientData[iTermId].d_id;

    pStockLevel->threshold = GetIntKeyValue(&ptr, "TT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ( pStockLevel->threshold >= 100 || pStockLevel->threshold < 0 )
        throw new CWEBCLNT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn->StockLevel();

    pStockLevel =
Term.pClientData[iTermId].pTxn->BuffAddr_StockLevel();
MakeStockLevelForm(iTermId, pStockLevel, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: GetNewOrderData
*
* PURPOSE:      This function extracts and validates the new order form
data from an http command string.
*
* ARGUMENTS:   LPSTR                                lpszQueryString
client browser http command string
*
*               NEW_ORDER_DATA
*pNewOrderData    pointer to new order data structure
*
*/

void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA
*pNewOrderData)

```

```

{
    char    szTmp[26];
    int     i;
    short   items;
    int     ol_i_id, ol_quantity;
    char    *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6] =
        { "SP00*", "SP01*", "SP02*", "SP03*", "SP04*",
          "SP05*", "SP06*", "SP07*", "SP08*", "SP09*",
          "SP10*", "SP11*", "SP12*", "SP13*", "SP14*" };
    static char szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "IID00*", "IID01*", "IID02*", "IID03*", "IID04*",
          "IID05*", "IID06*", "IID07*", "IID08*", "IID09*",
          "IID10*", "IID11*", "IID12*", "IID13*", "IID14*" };
    static char szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "Qty00*", "Qty01*", "Qty02*", "Qty03*", "Qty04*",
          "Qty05*", "Qty06*", "Qty07*", "Qty08*", "Qty09*",
          "Qty10*", "Qty11*", "Qty12*", "Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr, "CID*",
ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS; i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp) )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData->OL[items].ol_supply_w_id
= (short)atoi(szTmp);

            ol_i_id = pNewOrderData->OL[items].ol_i_id
=
                GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999 || ol_i_id < 1 )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_ITEMID_RANGE );

            ol_quantity =
pNewOrderData->OL[items].ol_quantity =
                GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_QTY_INVALID);
            if ( ol_quantity > 99 || ol_quantity < 1 )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_QTY_RANGE );

            items++;
        }
        else
        {
            // nothing entered for supply warehouse, so
            item id and qty must also be blank
            GetKeyValue(&ptr, szIID[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_IID_KEY);
            if ( szTmp[0] )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );

```

```

                GetKeyValue(&ptr, szQty[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_QTY_KEY);
                if ( szTmp[0] )
                    throw new CWEBCLNT_ERR(
ERR_NEWORDER_QTY_WITHOUT_SUPPW );
            }
        }
        if ( items == 0 )
            throw new CWEBCLNT_ERR(
ERR_NEWORDER_NOITEMS_ENTERED );

        pNewOrderData->o_ol_cnt = items;
    }

/* FUNCTION: GetPaymentData
*
* PURPOSE:      This function extracts and validates the payment form
data from an http command string.
*
* ARGUMENTS:   LPSTR                lpszQueryString
client browser http command string
                PAYMENT_DATA
*pPaymentData  pointer to payment data structure
*/

void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA
*pPaymentData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;
    BOOL    bCustIdBlank;

    pPaymentData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        bCustIdBlank = TRUE;
        pPaymentData->c_id = 0;
    }
    else
    {
        // parse customer id and verify that last name was NOT
entered
        bCustIdBlank = FALSE;
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
        pPaymentData->c_id = atoi(szTmp);
    }

    pPaymentData->c_w_id = GetIntKeyValue(&ptr, "CWI*",
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
    pPaymentData->c_d_id = GetIntKeyValue(&ptr, "CDI*",
ERR_PAYMENT_MISSING_CDI_KEY, ERR_PAYMENT_CDI_INVALID);

    if ( bCustIdBlank )
    {
        // customer id is blank, so last name must be entered
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );

        _strupr( szTmp );

```

```

        if ( strlen(pPaymentData->c_last) > LAST_NAME_LEN
)
        throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );
        strcpy(pPaymentData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was NOT
entered
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_HAM_KEY);
    if (!IsDecimal(szTmp))
        throw new CWEBCLNT_ERR(
ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
        throw new CWEBCLNT_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
*
* PURPOSE:      This function extracts and validates the payment form
data from an http command string.
*
*/
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA
*pOrderStatusData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;

    pOrderStatusData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(pOrderStatusData->c_last) >
LAST_NAME_LEN )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_CLT_RANGE );
        strcpy(pOrderStatusData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was NOT
entered

        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_CID_INVALID );

```

```

        pOrderStatusData->c_id = atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
*
* PURPOSE:      This function determines if a string is numeric. It fails if
any characters other
*
*               than numeric and null terminator are present.
*
* ARGUMENTS:   char                *ptr    pointer to
string to check.
*
* RETURNS:     BOOL    FALSE    if string is not all
numeric
*               TRUE    if
string contains only numeric characters i.e. '0' - '9'
*/

BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
*
* PURPOSE:      This function determines if a string is a non-negative
decimal value.
*
*               It fails if any characters other than a series of numbers followed by
*
*               a decimal point, another series of numbers,
and a null terminator are present.
*
* ARGUMENTS:   char                *ptr    pointer to
string to check.
*
* RETURNS:     BOOL    FALSE    if string is not a valid
non-negative decimal value
*               TRUE    if
string is OK
*/

BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if (dotptr == NULL)
        // no decimal point, so just check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace decimal with a terminator

    if ( *ptr != 0 )

```

```

        bValid = IsNumeric(ptr);
// string starts with decimal point
else if (*(dotptr+1) == 0)
    return FALSE; // nothing but a decimal point is bad
else
    bValid = TRUE;

if (*(dotptr+1) != 0)
    // check text after decimal point
    bValid &= IsNumeric(dotptr+1);

*dotptr = '!'; // replace decimal point
return bValid;
}

```

## tpcc.def

LIBRARY TPCC.DLL

EXPORTS

```

GetExtensionVersion @1
HttpExtensionProc @2
TerminateExtension @3

```

## tpcc.h

```

/* FILE: TPCC.H Microsoft TPC-C Kit Ver.
 * 4.20.000 Copyright Microsoft, 1999
 * All Rights Reserved
 * Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for ISAPI TPCC.DLL, defines
structures and functions used in the isapi tpcc.dll.
 */

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE
101
#define _APS_NEXT_COMMAND_VALUE
40001
#define _APS_NEXT_CONTROL_VALUE
1000
#define _APS_NEXT_SYMED_VALUE
101

#define TP_MAX_RETRIES
50

//note that the welcome form must be processed first as terminal ids assigned
here, once the
//terminal id is assigned then the forms can be processed in any order.
#define WELCOME_FORM
1 //beginning form no term id assigned, form id
#define MAIN_MENU_FORM
2 //term id assigned main menu form id
#define NEW_ORDER_FORM
3 //new order form id

```

```

#define PAYMENT_FORM
4 //payment form id
#define DELIVERY_FORM
5 //delivery form id
#define ORDER_STATUS_FORM
6 //order status id
#define STOCK_LEVEL_FORM
7 //stock level form id

//This macro is used to prevent the compiler error unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep distinct for each terminal or
client connection.
typedef struct _CLIENTDATA
{
    int iNextFree;
//index of next free element or -1 if this entry in use.
    int w_id;
//warehouse id assigned at welcome form
    int d_id;
//district id assigned at welcome form

    int iSyncId;
//synchronization id
    int iTickCount;
//time of last access;

    CTPCC_BASE *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational interface for terminal id support
typedef struct _TERM
{
    int iNumEntries;
//total allocated terminal array entries
    int iFreeList;
//next available terminal array element or -1 if none
    int iMasterSyncId;
//synchronization id
    CLIENTDATA *pClientData;
//pointer to allocated client data
} TERM;

typedef TERM *PTERM;
//pointer to terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADDLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,

```

```

ERR_NEWORDER_CUSTOMER_INVALID,
ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_DISTRICT_INVALID,
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_ITEMID_INVALID,
ERR_NEWORDER_ITEMID_RANGE,
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CDI_INVALID,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNT_ERR : public CBaseErr
{
public:
    CWEBCLNT_ERR(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CWEBCLNT_ERR(WEBERROR Err, char
    *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail, szTextDetail );
        m_SystemErr = dwSystemErr;
        m_szErrorText = NULL;
    };
};

};

//These constants have already been defined in engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6 //used to
record a warning into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call,
LPVOID lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int
*pCmd, int *pFormId, int *pTermId, int *pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int
iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int
iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int iError, int
iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax,
WEBERROR err);
int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR
NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int
iErrorNum, int iTermId, int iSyncId, char *szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData,
BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA
*pOrderStatusData, BOOL bInput, char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData,
BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);
};

```

```

void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA
*pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA
*pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA
*pOrderStatusData);
BOOL PostDeliveryInfo(short w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);

```

## tpcc.rc

```

//Microsoft Developer Studio generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

//
//undef APSTUDIO_READONLY_SYMBOLS

//
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef _MAC
//
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN

```

```

        VALUE "Comments", "TPC-C HTML DLL Server (DBLIB)0"
        VALUE "CompanyName", "Microsoft0"
        VALUE "FileDescription", "TPC-C HTML DLL Server (DBLIB)0"
        VALUE "FileVersion", "0, 4, 0, 0\0"
        VALUE "InternalName", "tpcc0"
        VALUE "LegalCopyright", "Copyright © 1997\0"
        VALUE "OriginalFilename", "tpcc.dll\0"
        VALUE "ProductName", "Microsoft tpcc\0"
        VALUE "ProductVersion", "0, 4, 0, 0\0"
    END
END
BLOCK "VarFileInfo"
BEGIN
    VALUE "Translation", 0x409, 1200
END
END

#endif // !_MAC

#ifdef APSTUDIO_INVOKED
//
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"\"afxres.h\"\"\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

//
// Dialog
//

IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON "OK",IDOK,129,7,50,14
    PUSHBUTTON "Cancel",IDCANCEL,129,24,50,14
END

//
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED

```



```

        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    // call setcomplete to release each component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pStockLevel->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

```

```
CTPCC_COM::~CTPCC_COM()
```

```

{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

```

```
void CTPCC_COM::NewOrder()
```

```

{
    VARIANT vTxn_out;

    HRESULT hr = m_pNewOrder->NewOrder(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void
*)vTxn_out.parray->pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType,
m_pTxn->error );
}

```

```
void CTPCC_COM::Payment()
```

```

{
    VARIANT vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void
*)vTxn_out.parray->pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )

```

```

        throw new CCOMERR( m_pTxn->ErrorType,
m_pTxn->error );
    }

    void CTPCC_COM::StockLevel()
    {
        VARIANT vTxn_out;

        HRESULT hr = m_pStockLevel->StockLevel(m_vTxn,
&vTxn_out);
        if (FAILED(hr))
            throw new CCOMERR( hr );
        memcpy(m_pTxn, (void
*)vTxn_out.parray->pvData,vTxn_out.parray->rgsabound[0].cElements);
        SafeArrayDestroy(vTxn_out.parray);

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn->ErrorType,
m_pTxn->error );
    }

```

```
void CTPCC_COM::OrderStatus()
```

```

{
    VARIANT vTxn_out;

    HRESULT hr = m_pOrderStatus->OrderStatus(m_vTxn,
&vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void
*)vTxn_out.parray->pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType,
m_pTxn->error );
}

```

## tpcc\_com.h

```

/*      FILE:          TPCC_COM.H
*                               Microsoft TPC-C Kit Ver.
4.20.000
*                               Copyright Microsoft, 1999
*
*      All Rights Reserved
*
*                               not yet audited
*
*      PURPOSE:       Header file for TPC-C COM+ class
implementation.
*
*      Change history:
*                               4.20.000 - first version
*/

#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CCOMERR : public CBaseErr

```



```

{
private:
    char m_szErrorText[64];

public:
    // use this interface for genuine COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to impersonate a non-COM error type
    CCOMERR( int iErrorType, int iError )
    {
        m_iErrorType = iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int m_hr;
    int m_iErrorType;
    int m_iError;

    // A CCOMERR class can impersonate another class,
    // which happens if the error
    // was not actually a COM Services error, but was simply
    // transmitted back via COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return ERR_TYPE_COM;
        else
            return m_iErrorType;
    }

    int ErrorNum() {return m_hr;}

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf( m_szErrorText, "Error:
Class %d, error # %d", m_iErrorType, m_iError );
        else
            sprintf( m_szErrorText, "Error:
COM HRESULT %x", m_hr );
        return m_szErrorText;
    }
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC* m_pNewOrder;
    ITPCC* m_pPayment;
    ITPCC* m_pStockLevel;
    ITPCC* m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA
            PAYMENT_DATA
            DELIVERY_DATA
            STOCK_LEVEL_DATA
            ORDER_STATUS_DATA
        } u;
    } *m_pTxn;

public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return &m_pTxn->u.NewOrder;
};
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return &m_pTxn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return &m_pTxn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
    { return &m_pTxn->u.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return &m_pTxn->u.OrderStatus; };

    void NewOrder ();
    void Payment ();
    void StockLevel ();
    void OrderStatus ();
    void Delivery () { throw new
CCOMERR(E_NOTIMPL); } // not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

tpcc_com_all.dsp

# Microsoft Developer Studio Project File - Name="tpcc_com_all" - Package
Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=tpcc_com_all - Win32 Debug
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE

```

```

!MESSAGE NMAKE /f "tpcc_com_all.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_all.mak" CFG="tpcc_com_all - Win32
Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc_com_all - Win32 Release" (based on "Win32 (x86)
Dynamic-Link Library")
!MESSAGE "tpcc_com_all - Win32 Debug" (based on "Win32 (x86)
Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "tpcc_com_all - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
" _WINDOWS" /YX /FD /c
# ADD CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
" _WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /1 0x409 /d "NDEBUG"
# ADD RSC /1 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbccp32.lib /nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 .\db_dblib_dll\bin\tpcc_dblib.lib
.\db_odbc_dll\bin\tpcc_odbc.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbccp32.lib /nologo /subsystem:windows /dll /machine:I386

!ELSEIF "$(CFG)" == "tpcc_com_all - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"

# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /ZI /Od /D "WIN32" /D
" _DEBUG" /D " _WINDOWS" /YX /FD /c
# ADD CPP /nologo /MTd /W3 /Gm /GX /ZI /Od /D "WIN32" /D " _DEBUG"
/D " _WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D " _DEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D " _DEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /1 0x409 /d " _DEBUG"
# ADD RSC /1 0x409 /d " _DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386
/pdbtype:sept

!ENDIF

# Begin Target

# Name "tpcc_com_all - Win32 Release"
# Name "tpcc_com_all - Win32 Debug"
# Begin Group "Source"

# PROP Default_Filter "*.cpp, *.c"
# Begin Source File

SOURCE=\src\tpcc_com_all.cpp
# SUBTRACT CPP /YX
# End Source File
# Begin Source File

SOURCE=\src\tpcc_com_all.def
# End Source File
# Begin Source File

SOURCE=\src\tpcc_com_all.idl

!IF "$(CFG)" == "tpcc_com_all - Win32 Release"

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=\src\tpcc_com_all.idl

BuildCmds= \
midl /Oicf /h "tpcc_com_all.h" /iid "tpcc_com_all_i.c"
"\src\tpcc_com_all.idl" /out ".\src"

"\src\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

"\src\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

"\src\tpcc_com_all_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_all - Win32 Debug"

```

```

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\src\tpcc_com_all.idl

BuildCmds= \
    midl /Oicf /h "tpcc_com_all.h" /iid "tpcc_com_all_i.c"
"\src\tpcc_com_all.idl" /out ".\src"

"\src\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

"\src\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

"\src\tpcc_com_all_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
# End Custom Build

!ENDIF

# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*"
# Begin Source File

SOURCE=.\src\Methods.h
# End Source File
# Begin Source File

SOURCE=.\src\resource.h
# End Source File
# End Group
# Begin Source File

SOURCE=.\src\tpcc_com_all.rc
# End Source File
# End Target
# End Project

```

## tpcc\_com\_ps.def

```

LIBRARY "tpcc_com_ps"

DESCRIPTION 'Proxy/Stub DLL'

EXPORTS
    DllGetClassObject @1 PRIVATE
    DllCanUnloadNow @2 PRIVATE
    GetProxyDllInfo @3 PRIVATE
    DllRegisterServer @4 PRIVATE
    DllUnregisterServer @5 PRIVATE

```

## tpcc\_com\_ps.h

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the definitions for the interfaces
*/

```

```

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of <rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef tpcc_com_ps_h_
#define tpcc_com_ps_h_

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef _cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR *);

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

```

```

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

MIDL_INTERFACE("FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B")
ITPCC : public IUnknown
{
public:
virtual HRESULT __stdcall NewOrder(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall Payment(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall Delivery(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall StockLevel(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall OrderStatus(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall CallSetComplete( void) = 0;

};

#else    /* C style interface */

typedef struct ITPCCVtbl
{
BEGIN_INTERFACE

HRESULT ( STDMETHODCALLTYPE __RPC_FAR *QueryInterface )(
    ITPCC __RPC_FAR * This,
    /* [in] */ REFIID riid,
    /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject);

ULONG ( STDMETHODCALLTYPE __RPC_FAR *AddRef )(
    ITPCC __RPC_FAR * This);

ULONG ( STDMETHODCALLTYPE __RPC_FAR *Release )(
    ITPCC __RPC_FAR * This);

HRESULT ( __stdcall __RPC_FAR *NewOrder )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( __stdcall __RPC_FAR *Payment )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( __stdcall __RPC_FAR *Delivery )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( __stdcall __RPC_FAR *StockLevel )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

};

#endif

#endif

HRESULT ( __stdcall __RPC_FAR *OrderStatus )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( __stdcall __RPC_FAR *CallSetComplete )(
    ITPCC __RPC_FAR * This);

END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
};

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This->lpVtbl->QueryInterface(This,riid,ppvObject))

#define ITPCC_AddRef(This) \
    (This->lpVtbl->AddRef(This))

#define ITPCC_Release(This) \
    (This->lpVtbl->Release(This))

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This->lpVtbl->NewOrder(This,txn_in,txn_out))

#define ITPCC_Payment(This,txn_in,txn_out) \
    (This->lpVtbl->Payment(This,txn_in,txn_out))

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This->lpVtbl->Delivery(This,txn_in,txn_out))

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This->lpVtbl->StockLevel(This,txn_in,txn_out))

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This->lpVtbl->OrderStatus(This,txn_in,txn_out))

#define ITPCC_CallSetComplete(This) \
    (This->lpVtbl->CallSetComplete(This))

#endif /* COBJMACROS */

#endif    /* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

```

```
HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);
```

```
void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);
```

```
void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);
```

```
void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);
```

```
void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC_RPC_FAR * This);
```

```
void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
#endif /* __ITPCC_INTERFACE_DEFINED__ */
```

```
/* Additional Prototypes for ALL interfaces */
```

```
unsigned long __RPC_USER VARIANT_UserSize( unsigned long
__RPC_FAR *, unsigned long , VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserMarshal(
unsigned long __RPC_FAR *, unsigned char __RPC_FAR *, VARIANT
__RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER
VARIANT_UserUnmarshal(unsigned long __RPC_FAR *, unsigned char
__RPC_FAR *, VARIANT __RPC_FAR * );
void __RPC_USER VARIANT_UserFree( unsigned long
__RPC_FAR *, VARIANT __RPC_FAR * );
```

```
/* end of Additional Prototypes */
```

```
#ifdef __cplusplus
}
#endif

#endif
```

### **tpcc\_com\_ps.idl**

```
/* FILE: ITPCC.IDL
* Microsoft TPC-C Kit Ver.
4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
*
* not yet audited
*
* PURPOSE: Defines the interface used by TPCC. This
interface can be implemented by C++ components.
*
* Change history:
* 4.20.000 - first version
*/
```

```
// Forward declare all types defined
interface ITPCC;
import "oidl.idl";
import "ocidl.idl";
```

```
[
    object,
    oleautomation,
    uuid(FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
```

```
interface ITPCC : IUnknown
{
```

```
    HRESULT __stdcall NewOrder
```

```
        (
            [in]
            VARIANT txn_in,
            [out]
            VARIANT *txn_out
        );
```

```
    HRESULT __stdcall Payment
```

```
        (
            [in]
            VARIANT txn_in,
```



```

DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,
0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64)*/

```

## **tpcc\_com\_ps\_p.c**

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the proxy stub code */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high enough to compile this file*/
#ifndef _REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef _RPCPROXY_H_VERSION__
#error this stub requires an updated version of <rpcproxy.h>
#endif // _RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 997
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x00,
0x46}} */

```

```

/* Object interface: ITPCC, ver. 0.0,

GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *)-1 /* ITPCC::NewOrder */,
    (void *)-1 /* ITPCC::Payment */,
    (void *)-1 /* ITPCC::Delivery */,
    (void *)-1 /* ITPCC::StockLevel */,
    (void *)-1 /* ITPCC::OrderStatus */,
    (void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

```

```

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x20000, /* Ndr library version */
    0,
    0x5030118, /* MIDL Version 5.3.280 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* Reserved3 */
    0, /* Reserved4 */
    0 /* Reserved5 */
};

#pragma data_seg(".rdata")

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this stub because it uses
these features:
#error -Oif or -Oicf, [wire_marshall] or [user_marshall] attribute.
#error However, your C/C++ compilation flags indicate you intend to run this
app on earlier systems.
#error This app will die there with the RPC_X_WRONG_STUB_VERSION
error.
#endif

static const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString =
{
    {
        0,
        {
            /* Procedure NewOrder */
            0x33, /*
FC_AUTO_HANDLE */

```



<pre> Oi2 */ /* 2 */ NdrFcLong( 0x0 ), /* 0 */ /* 6 */ NdrFcShort( 0x3 ), /* 3 */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined( _MIPS_ ) /* 8 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */ #else NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */ #endif #else NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */ #endif #else NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */ #endif /* 10 */ NdrFcShort( 0x0 ), /* 0 */ /* 12 */ NdrFcShort( 0x8 ), /* 8 */ /* 14 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has return, */ 0x3, /* 3 */ /* Parameter txn_in */ /* 16 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined( _MIPS_ ) /* 18 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */ #else NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */ #endif #else NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */ #endif #else NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */ #endif /* 20 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */ /* Parameter txn_out */ /* 22 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple ref, srv alloc size=16 */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined( _MIPS_ ) /* 24 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */ #else NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */ #endif #else NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */ #endif #else NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */ #endif /* 26 */ NdrFcShort( 0x3da ), /* Type Offset=986 */ </pre>	<pre> /* Return value */ /* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined( _MIPS_ ) /* 30 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */ #else NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */ #endif #else NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */ #endif #else NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */ #endif /* 32 */ 0x8, /* FC_LONG */ 0x0, /* 0 */ /* Procedure Payment */ /* 34 */ 0x33, /* FC_AUTO_HANDLE */ 0x6c, /* Old Flags: object, Oi2 */ /* 36 */ NdrFcLong( 0x0 ), /* 0 */ /* 40 */ NdrFcShort( 0x4 ), /* 4 */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined( _MIPS_ ) /* 42 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */ #else NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */ #endif #else NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */ #endif #else NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */ #endif /* 44 */ NdrFcShort( 0x0 ), /* 0 */ /* 46 */ NdrFcShort( 0x8 ), /* 8 */ /* 48 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has return, */ 0x3, /* 3 */ /* Parameter txn_in */ /* 50 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined( _MIPS_ ) /* 52 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */ #else NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */ #endif #else NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */ #endif #else NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */ #endif </pre>
---	---

```

                NdrFcShort( 0x8 ), /* Alpha Stack
size/offset = 8 */
#endif
/* 54 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

        /* Parameter txn_out */

/* 56 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
                NdrFcShort( 0x18 ), /* MIPS Stack
size/offset = 24 */
#endif
#else
                NdrFcShort( 0x18 ), /* PPC Stack size/offset
= 24 */
#endif
#else
                NdrFcShort( 0x18 ), /* Alpha Stack
size/offset = 24 */
#endif
/* 60 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

        /* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
                NdrFcShort( 0x1c ), /* MIPS Stack
size/offset = 28 */
#endif
#else
                NdrFcShort( 0x1c ), /* PPC Stack size/offset
= 28 */
#endif
#else
                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 32 */
#endif
/* 66 */ 0x8, /* FC_LONG */
                0x0, /* 0 */

        /* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
                0x6c, /* Old Flags: object,
Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
                NdrFcShort( 0x20 ), /* MIPS Stack
size/offset = 32 */
#endif
#else
                NdrFcShort( 0x20 ), /* PPC Stack size/offset
= 32 */
#endif
#else
                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 40 */
#endif
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has
return, */
                0x3, /* 3 */

        /* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
                NdrFcShort( 0x8 ), /* MIPS Stack
size/offset = 8 */
#endif
#else
                NdrFcShort( 0x8 ), /* PPC Stack size/offset
= 8 */
#endif
#else
                NdrFcShort( 0x8 ), /* Alpha Stack
size/offset = 8 */
#endif
/* 88 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

        /* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
                NdrFcShort( 0x18 ), /* MIPS Stack
size/offset = 24 */
#endif
#else
                NdrFcShort( 0x18 ), /* PPC Stack size/offset
= 24 */
#endif
#else
                NdrFcShort( 0x18 ), /* Alpha Stack
size/offset = 24 */
#endif
/* 94 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

        /* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
                NdrFcShort( 0x1c ), /* MIPS Stack
size/offset = 28 */
#endif
#else
                NdrFcShort( 0x1c ), /* PPC Stack size/offset
= 28 */
#endif
#else
                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 28 */
#endif

```

```

#else
                                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 32 */
#endif
/* 100 */ 0x8,                /* FC_LONG */
                                0x0,                /* 0 */

                                /* Procedure StockLevel */

/* 102 */ 0x33,                /* FC_AUTO_HANDLE */
                                0x6c,                /* Old Flags: object,
Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
                                NdrFcShort( 0x20 ), /* MIPS Stack
size/offset = 32 */
#endif
#else
                                NdrFcShort( 0x20 ), /* PPC Stack size/offset
= 32 */
#endif
#else
                                NdrFcShort( 0x28 ), /* Alpha Stack
size/offset = 40 */
#endif
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7,                /* Oi2 Flags: srv must size, clt must size, has
return, */
                                0x3,                /* 3 */

                                /* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
                                NdrFcShort( 0x8 ), /* MIPS Stack
size/offset = 8 */
#endif
#else
                                NdrFcShort( 0x8 ), /* PPC Stack size/offset
= 8 */
#endif
#else
                                NdrFcShort( 0x8 ), /* Alpha Stack
size/offset = 8 */
#endif
/* 122 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

                                /* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
                                NdrFcShort( 0x18 ), /* MIPS Stack
size/offset = 24 */
#endif
#endif
#endif
#endif
                                NdrFcShort( 0x18 ), /* PPC Stack size/offset
= 24 */
#endif
#else
                                NdrFcShort( 0x18 ), /* Alpha Stack
size/offset = 24 */
#endif
/* 128 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

                                /* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
                                NdrFcShort( 0x1c ), /* MIPS Stack
size/offset = 28 */
#endif
#else
                                NdrFcShort( 0x1c ), /* PPC Stack size/offset
= 28 */
#endif
#else
                                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 32 */
#endif
/* 134 */ 0x8,                /* FC_LONG */
                                0x0,                /* 0 */

                                /* Procedure OrderStatus */

/* 136 */ 0x33,                /* FC_AUTO_HANDLE */
                                0x6c,                /* Old Flags: object,
Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
                                NdrFcShort( 0x20 ), /* MIPS Stack
size/offset = 32 */
#endif
#else
                                NdrFcShort( 0x20 ), /* PPC Stack size/offset
= 32 */
#endif
#else
                                NdrFcShort( 0x28 ), /* Alpha Stack
size/offset = 40 */
#endif
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7,                /* Oi2 Flags: srv must size, clt must size, has
return, */
                                0x3,                /* 3 */

                                /* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)

```



```

/* 88 */ NdrFcShort( 0xee ), /* Offset= 238 (326) */
/* 90 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 94 */ NdrFcShort( 0xfa ), /* Offset= 250 (344) */
/* 96 */ NdrFcLong( 0x24 ), /* 36 */
/* 100 */ NdrFcShort( 0x308 ), /* Offset= 776 (876) */
/* 102 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 106 */ NdrFcShort( 0x302 ), /* Offset= 770 (876) */
/* 108 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 112 */ NdrFcShort( 0x300 ), /* Offset= 768 (880) */
/* 114 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 118 */ NdrFcShort( 0x2fe ), /* Offset= 766 (884) */
/* 120 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 124 */ NdrFcShort( 0x2fc ), /* Offset= 764 (888) */
/* 126 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 130 */ NdrFcShort( 0x2fa ), /* Offset= 762 (892) */
/* 132 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 136 */ NdrFcShort( 0x2f8 ), /* Offset= 760 (896) */
/* 138 */ NdrFcLong( 0x400b ), /* 16395 */
/* 142 */ NdrFcShort( 0x2e6 ), /* Offset= 742 (884) */
/* 144 */ NdrFcLong( 0x400a ), /* 16394 */
/* 148 */ NdrFcShort( 0x2e4 ), /* Offset= 740 (888) */
/* 150 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 154 */ NdrFcShort( 0x2ea ), /* Offset= 746 (900) */
/* 156 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 160 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (896) */
/* 162 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 166 */ NdrFcShort( 0x2e2 ), /* Offset= 738 (904) */
/* 168 */ NdrFcLong( 0x400d ), /* 16397 */
/* 172 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (908) */
/* 174 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 178 */ NdrFcShort( 0x2de ), /* Offset= 734 (912) */
/* 180 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 184 */ NdrFcShort( 0x2dc ), /* Offset= 732 (916) */
/* 186 */ NdrFcLong( 0x400c ), /* 16396 */
/* 190 */ NdrFcShort( 0x2da ), /* Offset= 730 (920) */
/* 192 */ NdrFcLong( 0x10 ), /* 16 */
/* 196 */ NdrFcShort( 0x8002 ), /* Simple arm type: FC_CHAR */
/* 198 */ NdrFcLong( 0x12 ), /* 18 */
/* 202 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 204 */ NdrFcLong( 0x13 ), /* 19 */
/* 208 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 210 */ NdrFcLong( 0x16 ), /* 22 */
/* 214 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 216 */ NdrFcLong( 0x17 ), /* 23 */
/* 220 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 222 */ NdrFcLong( 0xe ), /* 14 */
/* 226 */ NdrFcShort( 0x2be ), /* Offset= 702 (928) */
/* 228 */ NdrFcLong( 0x400e ), /* 16398 */
/* 232 */ NdrFcShort( 0x2c4 ), /* Offset= 708 (940) */
/* 234 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 238 */ NdrFcShort( 0x2c2 ), /* Offset= 706 (944) */
/* 240 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 244 */ NdrFcShort( 0x280 ), /* Offset= 640 (884) */
/* 246 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 250 */ NdrFcShort( 0x27e ), /* Offset= 638 (888) */
/* 252 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 256 */ NdrFcShort( 0x278 ), /* Offset= 632 (888) */
/* 258 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 262 */ NdrFcShort( 0x272 ), /* Offset= 626 (888) */
/* 264 */ NdrFcLong( 0x0 ), /* 0 */
/* 268 */ NdrFcShort( 0x0 ), /* Offset= 0 (268) */
/* 270 */ NdrFcLong( 0x1 ), /* 1 */
/* 274 */ NdrFcShort( 0x0 ), /* Offset= 0 (274) */
/* 276 */ NdrFcShort( 0xfffffff ), /* Offset= -1 (275) */
/* 278 */
0x15, /* FC_STRUCT */
0x7, /* 7 */
/* 280 */ NdrFcShort( 0x8 ), /* 8 */
/* 282 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 284 */
0x12, 0x0, /* FC_UP */
/* 286 */ NdrFcShort( 0xc ), /* Offset= 12 (298) */
/* 288 */
0x1b, /* FC_CARRAY */
0x1, /* 1 */
/* 290 */ NdrFcShort( 0x2 ), /* 2 */
/* 292 */ 0x9, /* Corr desc: FC_ULONG */
0x0, /* */
/* 294 */ NdrFcShort( 0xfffc ), /* -4 */
/* 296 */ 0x6, /* FC_SHORT */
0x5b, /* FC_END */
/* 298 */
0x17, /* FC_CSTRUCT */
0x3, /* 3 */
/* 300 */ NdrFcShort( 0x8 ), /* 8 */
/* 302 */ NdrFcShort( 0xfffff2 ), /* Offset= -14 (288) */
/* 304 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 306 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 308 */
0x2f, /* FC_IP */
0x5a, /* */
FC_CONSTANT_IID */
/* 310 */ NdrFcLong( 0x0 ), /* 0 */
/* 314 */ NdrFcShort( 0x0 ), /* 0 */
/* 316 */ NdrFcShort( 0x0 ), /* 0 */
/* 318 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 320 */ 0x0, /* 0 */
0x0, /* 0 */
/* 322 */ 0x0, /* 0 */
0x0, /* 0 */
/* 324 */ 0x0, /* 0 */
0x46, /* 70 */
/* 326 */
0x2f, /* FC_IP */
0x5a, /* */
FC_CONSTANT_IID */
/* 328 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 332 */ NdrFcShort( 0x0 ), /* 0 */
/* 334 */ NdrFcShort( 0x0 ), /* 0 */
/* 336 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 338 */ 0x0, /* 0 */
0x0, /* 0 */
/* 340 */ 0x0, /* 0 */
0x0, /* 0 */
/* 342 */ 0x0, /* 0 */
0x46, /* 70 */
/* 344 */
0x12, 0x10, /* FC_UP */
[pointer_deref] */
/* 346 */ NdrFcShort( 0x2 ), /* Offset= 2 (348) */
/* 348 */
0x12, 0x0, /* FC_UP */
/* 350 */ NdrFcShort( 0x1fc ), /* Offset= 508 (858) */
/* 352 */
0x2a, /* */
FC_ENCAPSULATED_UNION */
0x49, /* 73 */
/* 354 */ NdrFcShort( 0x18 ), /* 24 */
/* 356 */ NdrFcShort( 0xa ), /* 10 */
/* 358 */ NdrFcLong( 0x8 ), /* 8 */
/* 362 */ NdrFcShort( 0x58 ), /* Offset= 88 (450) */

```

```

/* 364 */ NdrFcLong( 0xd ), /* 13 */
/* 368 */ NdrFcShort( 0x78 ), /* Offset= 120 (488) */
/* 370 */ NdrFcLong( 0x9 ), /* 9 */
/* 374 */ NdrFcShort( 0x94 ), /* Offset= 148 (522) */
/* 376 */ NdrFcLong( 0xc ), /* 12 */
/* 380 */ NdrFcShort( 0xbc ), /* Offset= 188 (568) */
/* 382 */ NdrFcLong( 0x24 ), /* 36 */
/* 386 */ NdrFcShort( 0x114 ), /* Offset= 276 (662) */
/* 388 */ NdrFcLong( 0x800d ), /* 32781 */
/* 392 */ NdrFcShort( 0x130 ), /* Offset= 304 (696) */
/* 394 */ NdrFcLong( 0x10 ), /* 16 */
/* 398 */ NdrFcShort( 0x148 ), /* Offset= 328 (726) */
/* 400 */ NdrFcLong( 0x2 ), /* 2 */
/* 404 */ NdrFcShort( 0x160 ), /* Offset= 352 (756) */
/* 406 */ NdrFcLong( 0x3 ), /* 3 */
/* 410 */ NdrFcShort( 0x178 ), /* Offset= 376 (786) */
/* 412 */ NdrFcLong( 0x14 ), /* 20 */
/* 416 */ NdrFcShort( 0x190 ), /* Offset= 400 (816) */
/* 418 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (417) */
/* 420 */
0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 422 */ NdrFcShort( 0x4 ), /* 4 */
/* 424 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 426 */ NdrFcShort( 0x0 ), /* 0 */
/* 428 */
0x4b, /* FC_PP */
0x5c, /* FC_PAD */
/* 430 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 432 */ NdrFcShort( 0x4 ), /* 4 */
/* 434 */ NdrFcShort( 0x0 ), /* 0 */
/* 436 */ NdrFcShort( 0x1 ), /* 1 */
/* 438 */ NdrFcShort( 0x0 ), /* 0 */
/* 440 */ NdrFcShort( 0x0 ), /* 0 */
/* 442 */ 0x12, 0x0, /* FC_UP */
/* 444 */ NdrFcShort( 0xffffffff6e ), /* Offset= -146 (298) */
/* 446 */
0x5b, /* FC_END */
0x8, /* FC_LONG */
/* 448 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 450 */
0x16, /* FC_PSTRUCT */
0x3, /* 3 */
/* 452 */ NdrFcShort( 0x8 ), /* 8 */
/* 454 */
0x4b, /* FC_PP */
0x5c, /* FC_PAD */
/* 456 */
0x46, /* FC_NO_REPEAT */
0x5c, /* FC_PAD */
/* 458 */ NdrFcShort( 0x4 ), /* 4 */
/* 460 */ NdrFcShort( 0x4 ), /* 4 */
/* 462 */ 0x11, 0x0, /* FC_RP */
/* 464 */ NdrFcShort( 0xffffffffd4 ), /* Offset= -44 (420) */
/* 466 */
0x5b, /* FC_END */
0x8, /* FC_LONG */
/* 468 */ 0x8, /* FC_LONG */
0x5b, /* FC_END */
/* 470 */
FC_BOGUS_ARRAY */
0x21, /*
0x3, /* 3 */
/* 472 */ NdrFcShort( 0x0 ), /* 0 */
/* 474 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 476 */ NdrFcShort( 0x0 ), /* 0 */
/* 478 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 482 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 484 */ NdrFcShort( 0xffffffff50 ), /* Offset= -176 (308) */
/* 486 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 488 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 490 */ NdrFcShort( 0x8 ), /* 8 */
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x6 ), /* Offset= 6 (500) */
/* 496 */ 0x8, /* FC_LONG */
0x36, /* FC_POINTER */
/* 498 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 500 */
0x11, 0x0, /* FC_RP */
/* 502 */ NdrFcShort( 0xffffffffe0 ), /* Offset= -32 (470) */
/* 504 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 510 */ NdrFcShort( 0x0 ), /* 0 */
/* 512 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 518 */ NdrFcShort( 0xffffffff40 ), /* Offset= -192 (326) */
/* 520 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 522 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 524 */ NdrFcShort( 0x8 ), /* 8 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8, /* FC_LONG */
0x36, /* FC_POINTER */
/* 532 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 534 */
0x11, 0x0, /* FC_RP */
/* 536 */ NdrFcShort( 0xffffffffe0 ), /* Offset= -32 (504) */
/* 538 */
0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 540 */ NdrFcShort( 0x4 ), /* 4 */
/* 542 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */
0x4b, /* FC_PP */
0x5c, /* FC_PAD */
/* 548 */
0x48, /*
FC_VARIABLE_REPEAT */

```

	0x49,	/*		0x12, 0x0, /* FC_UP */	
FC_FIXED_OFFSET */				/* 630 */ NdrFcShort( 0xfffffe4 ),	/* Offset= -28 (602) */
/* 550 */	NdrFcShort( 0x4 ),	/* 4 */		/* 632 */	
/* 552 */	NdrFcShort( 0x0 ),	/* 0 */			0x1b,
/* 554 */	NdrFcShort( 0x1 ),	/* 1 */			0x3,
/* 556 */	NdrFcShort( 0x0 ),	/* 0 */		/* 634 */ NdrFcShort( 0x4 ),	/* 4 */
/* 558 */	NdrFcShort( 0x0 ),	/* 0 */		/* 636 */ 0x19,	/* Corr desc: field pointer, FC_ULONG */
/* 560 */	0x12, 0x0, /* FC_UP */				0x0,
/* 562 */	NdrFcShort( 0x182 ),	/* Offset= 386 (948) */		/* 638 */ NdrFcShort( 0x0 ),	/* 0 */
/* 564 */				/* 640 */	
	0x5b,	/* FC_END */			0x4b,
					0x5c,
/* 566 */	0x5c,	/* FC_PAD */		/* 642 */	
	0x5b,	/* FC_END */			0x48,
/* 568 */				FC_VARIABLE_REPEAT */	
	0x1a,	/*			0x49,
FC_BOGUS_STRUCT */				FC_FIXED_OFFSET */	
	0x3,	/* 3 */		/* 644 */ NdrFcShort( 0x4 ),	/* 4 */
/* 570 */	NdrFcShort( 0x8 ),	/* 8 */		/* 646 */ NdrFcShort( 0x0 ),	/* 0 */
/* 572 */	NdrFcShort( 0x0 ),	/* 0 */		/* 648 */ NdrFcShort( 0x1 ),	/* 1 */
/* 574 */	NdrFcShort( 0x6 ),	/* Offset= 6 (580) */		/* 650 */ NdrFcShort( 0x0 ),	/* 0 */
/* 576 */	0x8,	/* FC_LONG */		/* 652 */ NdrFcShort( 0x0 ),	/* 0 */
	0x36,	/* FC_POINTER */		/* 654 */ 0x12, 0x0, /* FC_UP */	
/* 578 */	0x5c,	/* FC_PAD */		/* 656 */ NdrFcShort( 0xfffffd4 ),	/* Offset= -44 (612) */
/* 580 */		/* FC_END */		/* 658 */	
	0x11, 0x0, /* FC_RP */				0x5b,
/* 582 */	NdrFcShort( 0xfffffd4 ),	/* Offset= -44 (538) */		/* 660 */ 0x5c,	/* FC_LONG */
/* 584 */					0x5b,
	0x2f,	/* FC_IP */		/* 662 */	
	0x5a,	/*			0x1a,
FC_CONSTANT_IID */				FC_BOGUS_STRUCT */	
/* 586 */	NdrFcLong( 0x2f ),	/* 47 */			0x3,
/* 590 */	NdrFcShort( 0x0 ),	/* 0 */		/* 664 */ NdrFcShort( 0x8 ),	/* 8 */
/* 592 */	NdrFcShort( 0x0 ),	/* 0 */		/* 666 */ NdrFcShort( 0x0 ),	/* 0 */
/* 594 */	0xc0,	/* 192 */		/* 668 */ NdrFcShort( 0x6 ),	/* Offset= 6 (674) */
	0x0,	/* 0 */		/* 670 */ 0x8,	/* FC_LONG */
/* 596 */	0x0,	/* 0 */			0x36,
	0x0,	/* 0 */		/* 672 */ 0x5c,	/* FC_PAD */
/* 598 */	0x0,	/* 0 */			0x5b,
/* 600 */	0x0,	/* 0 */		/* 674 */	
	0x46,	/* 70 */			0x11, 0x0, /* FC_RP */
/* 602 */				/* 676 */ NdrFcShort( 0xfffffd4 ),	/* Offset= -44 (632) */
	0x1b,	/* FC_CARRAY */		/* 678 */	
	0x0,	/* 0 */			0x1d,
/* 604 */	NdrFcShort( 0x1 ),	/* 1 */		/* 680 */ NdrFcShort( 0x8 ),	/* 8 */
/* 606 */	0x19,	/* Corr desc: field pointer, FC_ULONG */		/* 682 */ 0x2,	/* FC_CHAR */
	0x0,	/*			0x5b,
/* 608 */	NdrFcShort( 0x4 ),	/* 4 */		/* 684 */	/* FC_END */
/* 610 */	0x1,	/* FC_BYTE */			0x15,
/* 612 */		/* FC_END */			0x3,
	0x1a,	/*		/* 686 */ NdrFcShort( 0x10 ),	/* 16 */
FC_BOGUS_STRUCT */				/* 688 */ 0x8,	/* FC_LONG */
	0x3,	/* 3 */			0x6,
/* 614 */	NdrFcShort( 0x10 ),	/* 16 */		/* 690 */ 0x6,	/* FC_SHORT */
/* 616 */	NdrFcShort( 0x0 ),	/* 0 */			0x4c,
/* 618 */	NdrFcShort( 0xa ),	/* Offset= 10 (628) */		FC_EMBEDDED_COMPLEX */	
/* 620 */	0x8,	/* FC_LONG */		/* 692 */ 0x0,	/* 0 */
	0x8,	/* FC_LONG */			NdrFcShort( 0xfffff1 ),
/* 622 */	0x4c,	/* FC_EMBEDDED_COMPLEX */		-15 (678) */	/* Offset=
	0x0,	/* 0 */		/* 696 */	
/* 624 */	NdrFcShort( 0xfffffd8 ),	/* Offset= -40 (584) */			0x5b,
/* 626 */	0x36,	/* FC_POINTER */			0x1a,
/* 628 */		/* FC_END */		FC_BOGUS_STRUCT */	
	0x5b,	/* FC_END */			0x3,
				/* 698 */ NdrFcShort( 0x18 ),	/* 24 */

/* 700 */	NdrFcShort( 0x0 ),	/* 0 */	/* 774 */	0x8,	/* FC_LONG */
/* 702 */	NdrFcShort( 0xa ),	/* Offset= 10 (712) */	/* 776 */		0x5b, /* FC_END */
/* 704 */	0x8,	/* FC_LONG */	/* 778 */	NdrFcShort( 0x4 ),	/* FC_CARRY */
/* 706 */	0x4c,	0x36, /* FC_POINTER */	/* 780 */	0x19,	/* 3 */
/* 708 */	NdrFcShort( 0xfffffe8 ),	/* FC_EMBEDDED_COMPLEX */	/* 782 */	NdrFcShort( 0x0 ),	/* 4 */
/* 710 */	0x5c,	0x0, /* 0 */	/* 784 */	0x8,	/* Corr desc: field pointer, FC_ULONG */
/* 712 */		/* FC_PAD */	/* 786 */		/* 0 */
/* 714 */	NdrFcShort( 0xfffff0c ),	0x5b, /* FC_END */	/* 788 */	NdrFcShort( 0x8 ),	/* FC_LONG */
/* 716 */		0x11, 0x0, /* FC_RP */	/* 790 */		0x5b, /* FC_END */
/* 718 */	NdrFcShort( 0x1 ),	/* Offset= -244 (470) */	/* 792 */		0x16, /* FC_PSTRUCT */
/* 720 */	0x19,	0x1b, /* FC_CARRY */	/* 794 */	NdrFcShort( 0x4 ),	/* 3 */
/* 722 */	NdrFcShort( 0x0 ),	0x0, /* 0 */	/* 796 */	NdrFcShort( 0x4 ),	/* 4 */
/* 724 */	0x1,	/* Corr desc: field pointer, FC_ULONG */	/* 798 */	0x12, 0x0, /* FC_UP */	/* 8 */
/* 726 */		0x0, /* 0 */	/* 800 */	NdrFcShort( 0xfffffe8 ),	/* Offset= -24 (776) */
/* 728 */	NdrFcShort( 0x8 ),	/* FC_BYTE */	/* 802 */		0x5b, /* FC_END */
/* 730 */		0x5b, /* FC_END */	/* 804 */	0x8,	/* FC_LONG */
/* 732 */		0x16, /* FC_PSTRUCT */	/* 806 */		0x5b, /* FC_END */
/* 734 */	NdrFcShort( 0x4 ),	0x3, /* 3 */	/* 808 */	NdrFcShort( 0x8 ),	/* FC_CARRY */
/* 736 */	NdrFcShort( 0x4 ),	/* FC_PP */	/* 810 */	0x19,	/* 7 */
/* 738 */	0x12, 0x0, /* FC_UP */	/* FC_PAD */	/* 812 */	NdrFcShort( 0x0 ),	/* 8 */
/* 740 */	NdrFcShort( 0xfffffe8 ),	/* FC_NO_REPEAT */	/* 814 */	0xb,	/* Corr desc: field pointer, FC_ULONG */
/* 742 */		0x46, /* FC_NO_REPEAT */	/* 816 */		/* 0 */
/* 744 */	0x8,	0x5c, /* FC_PAD */	/* 818 */	NdrFcShort( 0x8 ),	/* FC_HYPER */
/* 746 */		0x46, /* FC_NO_REPEAT */	/* 820 */		0x5b, /* FC_END */
/* 748 */	NdrFcShort( 0x2 ),	0x5c, /* FC_PAD */	/* 822 */		0x16, /* FC_PSTRUCT */
/* 750 */	0x19,	0x5c, /* FC_PAD */	/* 824 */	NdrFcShort( 0x4 ),	/* 3 */
/* 752 */	NdrFcShort( 0x0 ),	0x1b, /* FC_CARRY */	/* 826 */	NdrFcShort( 0x4 ),	/* 4 */
/* 754 */	0x6,	0x1, /* 1 */	/* 828 */	0x12, 0x0, /* FC_UP */	/* 8 */
/* 756 */		0x0, /* 0 */	/* 830 */	NdrFcShort( 0xfffffe8 ),	/* Offset= -24 (806) */
/* 758 */	NdrFcShort( 0x8 ),	/* FC_SHORT */	/* 832 */		0x5b, /* FC_END */
/* 760 */		0x5b, /* FC_END */	/* 834 */	0x8,	/* FC_LONG */
/* 762 */		0x16, /* FC_PSTRUCT */	/* 836 */		0x5b, /* FC_END */
/* 764 */	NdrFcShort( 0x4 ),	0x3, /* 3 */	/* 838 */	NdrFcShort( 0x8 ),	/* FC_STRUCT */
/* 766 */	NdrFcShort( 0x4 ),	/* FC_NO_REPEAT */	/* 840 */	0x8,	/* 3 */
/* 768 */	0x12, 0x0, /* FC_UP */	0x5c, /* FC_PAD */	/* 842 */	0x5c,	/* FC_LONG */
/* 770 */	NdrFcShort( 0xfffffe8 ),	0x4b, /* FC_PP */	/* 844 */		/* FC_LONG */
/* 772 */		0x5c, /* FC_PAD */	/* 846 */		0x5b, /* FC_END */
/* 774 */		0x46, /* FC_NO_REPEAT */	/* 848 */		0x8, /* FC_LONG */
/* 776 */	NdrFcShort( 0x4 ),	0x5c, /* FC_PAD */	/* 850 */		0x15, /* FC_STRUCT */
/* 778 */	NdrFcShort( 0x4 ),	0x1b, /* FC_CARRY */	/* 852 */		0x3, /* 3 */
/* 780 */	0x12, 0x0, /* FC_UP */	0x0, /* 0 */	/* 854 */	NdrFcShort( 0x8 ),	/* 8 */
/* 782 */	NdrFcShort( 0x0 ),	/* FC_END */	/* 856 */	0x8,	/* FC_LONG */
/* 784 */	0x8,	/* FC_LONG */	/* 858 */		0x8, /* FC_LONG */
/* 786 */		0x8, /* FC_LONG */	/* 860 */	0x5c,	/* FC_PAD */
/* 788 */	NdrFcShort( 0x8 ),	0x5b, /* FC_END */	/* 862 */		0x5b, /* FC_END */
/* 790 */		0x16, /* FC_PSTRUCT */	/* 864 */		0x8, /* FC_LONG */
/* 792 */		0x3, /* 3 */	/* 866 */		0x8, /* FC_LONG */
/* 794 */	NdrFcShort( 0x4 ),	/* FC_CARRY */	/* 868 */		0x5b, /* FC_END */
/* 796 */	NdrFcShort( 0x4 ),	/* 1 */	/* 870 */		0x8, /* FC_LONG */
/* 798 */	0x12, 0x0, /* FC_UP */	/* Corr desc: field pointer, FC_ULONG */	/* 872 */		0x8, /* FC_LONG */
/* 800 */	NdrFcShort( 0xfffffe8 ),	/* 0 */	/* 874 */		0x5c, /* FC_PAD */
/* 802 */		/* FC_END */	/* 876 */		0x5b, /* FC_END */
/* 804 */	0x8,	/* FC_LONG */	/* 878 */		0x8, /* FC_LONG */
/* 806 */		0x5b, /* FC_END */	/* 880 */		0x5b, /* FC_END */
/* 808 */	NdrFcShort( 0x8 ),	/* FC_CARRY */	/* 882 */		0x15, /* FC_STRUCT */
/* 810 */	0x19,	/* 7 */	/* 884 */		0x3, /* 3 */
/* 812 */	NdrFcShort( 0x0 ),	/* FC_NO_REPEAT */	/* 886 */	NdrFcShort( 0x8 ),	/* 8 */
/* 814 */	0xb,	/* FC_PAD */	/* 888 */	0x8,	/* FC_LONG */
/* 816 */		0x46, /* FC_NO_REPEAT */	/* 890 */		0x8, /* FC_LONG */
/* 818 */	NdrFcShort( 0x8 ),	0x5c, /* FC_PAD */	/* 892 */	0x5c,	/* FC_PAD */
/* 820 */		0x46, /* FC_NO_REPEAT */	/* 894 */		0x5b, /* FC_END */
/* 822 */		0x5c, /* FC_PAD */	/* 896 */		0x8, /* FC_LONG */
/* 824 */	NdrFcShort( 0x4 ),	0x1b, /* FC_CARRY */	/* 898 */		0x8, /* FC_LONG */
/* 826 */	NdrFcShort( 0x4 ),	0x1, /* 1 */	/* 900 */		0x5c, /* FC_PAD */
/* 828 */	0x12, 0x0, /* FC_UP */	0x0, /* 0 */	/* 902 */		0x5b, /* FC_END */
/* 830 */	NdrFcShort( 0xfffffe8 ),	/* FC_END */	/* 904 */		0x8, /* FC_LONG */
/* 832 */		/* FC_LONG */	/* 906 */		0x8, /* FC_LONG */
/* 834 */	0x8,	/* FC_LONG */	/* 908 */		0x5c, /* FC_PAD */
/* 836 */		0x5b, /* FC_END */	/* 910 */		0x5b, /* FC_END */
/* 838 */	NdrFcShort( 0x8 ),	0x16, /* FC_PSTRUCT */	/* 912 */		0x8, /* FC_LONG */
/* 840 */	0x8,	0x3, /* 3 */	/* 914 */		0x8, /* FC_LONG */
/* 842 */		/* FC_CARRY */	/* 916 */		0x5c, /* FC_PAD */
/* 844 */		/* 1 */	/* 918 */		0x5b, /* FC_END */
/* 846 */	0x5c,	/* Corr desc: field pointer, FC_ULONG */	/* 920 */		0x8, /* FC_LONG */
/* 848 */		/* 0 */	/* 922 */		0x8, /* FC_LONG */
/* 850 */		/* FC_SHORT */	/* 924 */		0x5c, /* FC_PAD */
/* 852 */		0x5b, /* FC_END */	/* 926 */		0x5b, /* FC_END */
/* 854 */		0x16, /* FC_PSTRUCT */	/* 928 */		0x8, /* FC_LONG */
/* 856 */		0x3, /* 3 */	/* 930 */		0x8, /* FC_LONG */
/* 858 */		/* FC_CARRY */	/* 932 */		0x5c, /* FC_PAD */
/* 860 */		/* 1 */	/* 934 */		0x5b, /* FC_END */
/* 862 */	0x5c,	/* Corr desc: field pointer, FC_ULONG */	/* 936 */		0x8, /* FC_LONG */
/* 864 */		/* 0 */	/* 938 */		0x8, /* FC_LONG */
/* 866 */		/* FC_END */	/* 940 */		0x5c, /* FC_PAD */
/* 868 */		/* FC_LONG */	/* 942 */		0x5b, /* FC_END */
/* 870 */		0x5b, /* FC_END */	/* 944 */		0x8, /* FC_LONG */
/* 872 */		0x8, /* FC_LONG */	/* 946 */		0x8, /* FC_LONG */
/* 874 */		0x8, /* FC_LONG */	/* 948 */		0x5c, /* FC_PAD */
/* 876 */		0x5b, /* FC_END */	/* 950 */		0x5b, /* FC_END */
/* 878 */		0x8, /* FC_LONG */	/* 952 */		0x8, /* FC_LONG */
/* 880 */		0x8, /* FC_LONG */	/* 954 */		0x8, /* FC_LONG */
/* 882 */		0x5c, /* FC_PAD */	/* 956 */		0x5c, /* FC_PAD */
/* 884 */		0x5b, /* FC_END */	/* 958 */		0x5b, /* FC_END */
/* 886 */		0x8, /* FC_LONG */	/* 960 */		0x8, /* FC_LONG */
/* 888 */		0x8, /* FC_LONG */	/* 962 */		0x8, /* FC_LONG */
/* 890 */		0x5c, /* FC_PAD */	/* 964 */		0x5c, /* FC_PAD */
/* 892 */		0x5b, /* FC_END */	/* 966 */		0x5b, /* FC_END */
/* 894 */		0x8, /* FC_LONG */	/* 968 */		0x8, /* FC_LONG */
/* 896 */		0x8, /* FC_LONG */	/* 970 */		0x8, /* FC_LONG */
/* 898 */		0x5c, /* FC_PAD */	/* 972 */		0x5c, /* FC_PAD */
/* 900 */		0x5b, /* FC_END */	/* 974 */		0x5b, /* FC_END */
/* 902 */		0x8, /* FC_LONG */	/* 976 */		0x8, /* FC_LONG */
/* 904 */		0x8, /* FC_LONG */	/* 978 */		0x8, /* FC_LONG */
/* 906 */		0x5c, /* FC_PAD */	/* 980 */		0x5c, /* FC_PAD */
/* 908 */		0x5b, /* FC_END */	/* 982 */		0x5b, /* FC_END */
/* 910 */		0x8, /* FC_LONG */	/* 984 */		0x8, /* FC_LONG */
/* 912 */		0x8, /* FC_LONG */	/* 986 */		0x8, /* FC_LONG */
/* 914 */		0x5c, /* FC_PAD */	/* 988 */		0x5c, /* FC_PAD */
/* 916 */		0x5b, /* FC_END */	/* 990 */		0x5b, /* FC_END */
/* 918 */		0x8, /* FC_LONG */	/* 992 */		0x8, /* FC_LONG */
/* 920 */		0x8, /* FC_LONG */	/* 994 */		0x8, /* FC_LONG */
/* 922 */		0x5c, /* FC_PAD */	/* 996 */		0x5c, /* FC_PAD */
/* 924 */		0x5b, /* FC_END */	/* 998 */		0x5b, /* FC_END */
/* 926 */		0x8, /* FC_LONG */	/* 1000 */		0x8, /* FC_LONG */
/* 928 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 930 */		0x5c, /* FC_PAD */			0x5c, /* FC_PAD */
/* 932 */		0x5b, /* FC_END */			0x5b, /* FC_END */
/* 934 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 936 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 938 */		0x5c, /* FC_PAD */			0x5c, /* FC_PAD */
/* 940 */		0x5b, /* FC_END */			0x5b, /* FC_END */
/* 942 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 944 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 946 */		0x5c, /* FC_PAD */			0x5c, /* FC_PAD */
/* 948 */		0x5b, /* FC_END */			0x5b, /* FC_END */
/* 950 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 952 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 954 */		0x5c, /* FC_PAD */			0x5c, /* FC_PAD */
/* 956 */		0x5b, /* FC_END */			0x5b, /* FC_END */
/* 958 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 960 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 962 */		0x5c, /* FC_PAD */			0x5c, /* FC_PAD */
/* 964 */		0x5b, /* FC_END */			0x5b, /* FC_END */
/* 966 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 968 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 970 */		0x5c, /* FC_PAD */			0x5c, /* FC_PAD */
/* 972 */		0x5b, /* FC_END */			0x5b, /* FC_END */
/* 974 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 976 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 978 */		0x5c, /* FC_PAD */			0x5c, /* FC_PAD */
/* 980 */		0x5b, /* FC_END */			0x5b, /* FC_END */
/* 982 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 984 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 986 */		0x5c, /* FC_PAD */			0x5c, /* FC_PAD */
/* 988 */		0x5b, /* FC_END */			0x5b, /* FC_END */
/* 990 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 992 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 994 */		0x5c, /* FC_PAD */			0x5c, /* FC_PAD */
/* 996 */		0x5b, /* FC_END */			0x5b, /* FC_END */
/* 998 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */
/* 1000 */		0x8, /* FC_LONG */			0x8, /* FC_LONG */



```

/* 844 */
                                0x1b,          /* FC_CARRAY */
                                0x3,           /* 3 */
/* 846 */ NdrFcShort( 0x8 ), /* 8 */
/* 848 */ 0x7,              /* Corr desc: FC_USHORT */
                                0x0,         /* */
/* 850 */ NdrFcShort( 0xffd8 ), /* -40 */
/* 852 */ 0x4c,            /* FC_EMBEDDED_COMPLEX */
                                0x0,         /* 0 */
/* 854 */ NdrFcShort( 0xfffffee ), /* Offset= -18 (836) */
/* 856 */ 0x5c,            /* FC_PAD */
                                0x5b,         /* FC_END */
/* 858 */
                                0x1a,         /*
FC_BOGUS_STRUCT */
                                0x3,         /* 3 */
/* 860 */ NdrFcShort( 0x28 ), /* 40 */
/* 862 */ NdrFcShort( 0xfffffee ), /* Offset= -18 (844) */
/* 864 */ NdrFcShort( 0x0 ), /* Offset= 0 (864) */
/* 866 */ 0x6,             /* FC_SHORT */
                                0x6,         /* FC_SHORT */
/* 868 */ 0x38,           /* FC_ALIGNM4 */
                                0x8,         /* FC_LONG */
/* 870 */ 0x8,            /* FC_LONG */
                                0x4c,         /*
FC_EMBEDDED_COMPLEX */
/* 872 */ 0x0,            /* 0 */
                                NdrFcShort( 0xffffdf7 ), /* Offset=
-521 (352) */
                                0x5b,         /* FC_END */
/* 876 */
                                0x12, 0x0, /* FC_UP */
/* 878 */ NdrFcShort( 0xfffffe6 ), /* Offset= -266 (612) */
/* 880 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 882 */ 0x1,            /* FC_BYTE */
                                0x5c,         /* FC_PAD */
/* 884 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 886 */ 0x6,            /* FC_SHORT */
                                0x5c,         /* FC_PAD */
/* 888 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 890 */ 0x8,            /* FC_LONG */
                                0x5c,         /* FC_PAD */
/* 892 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 894 */ 0xa,            /* FC_FLOAT */
                                0x5c,         /* FC_PAD */
/* 896 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 898 */ 0xc,            /* FC_DOUBLE */
                                0x5c,         /* FC_PAD */
/* 900 */
                                0x12, 0x0, /* FC_UP */
/* 902 */ NdrFcShort( 0xffffd90 ), /* Offset= -624 (278) */
/* 904 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 906 */ NdrFcShort( 0xffffd92 ), /* Offset= -622 (284) */
/* 908 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 910 */ NdrFcShort( 0xffffda6 ), /* Offset= -602 (308) */
/* 912 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 914 */ NdrFcShort( 0xffffdb4 ), /* Offset= -588 (326) */

/* 916 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 918 */ NdrFcShort( 0xffffdc2 ), /* Offset= -574 (344) */
/* 920 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 922 */ NdrFcShort( 0x2 ), /* Offset= 2 (924) */
/* 924 */
                                0x12, 0x0, /* FC_UP */
/* 926 */ NdrFcShort( 0x16 ), /* Offset= 22 (948) */
/* 928 */
                                0x15,         /* FC_STRUCT */
                                0x7,         /* 7 */
/* 930 */ NdrFcShort( 0x10 ), /* 16 */
/* 932 */ 0x6,            /* FC_SHORT */
                                0x1,         /* FC_BYTE */
/* 934 */ 0x1,            /* FC_BYTE */
                                0x38,         /* FC_ALIGNM4 */
/* 936 */ 0x8,            /* FC_LONG */
                                0x39,         /* FC_ALIGNM8 */
/* 938 */ 0xb,            /* FC_HYPER */
                                0x5b,         /* FC_END */
/* 940 */
                                0x12, 0x0, /* FC_UP */
/* 942 */ NdrFcShort( 0xfffff12 ), /* Offset= -14 (928) */
/* 944 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 946 */ 0x2,            /* FC_CHAR */
                                0x5c,         /* FC_PAD */
/* 948 */
                                0x1a,         /*
FC_BOGUS_STRUCT */
                                0x7,         /* 7 */
/* 950 */ NdrFcShort( 0x20 ), /* 32 */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x0 ), /* Offset= 0 (954) */
/* 956 */ 0x8,            /* FC_LONG */
                                0x8,         /* FC_LONG */
/* 958 */ 0x6,            /* FC_SHORT */
                                0x6,         /* FC_SHORT */
/* 960 */ 0x6,            /* FC_SHORT */
                                0x6,         /* FC_SHORT */
/* 962 */ 0x4c,           /* FC_EMBEDDED_COMPLEX */
                                0x0,         /* 0 */
/* 964 */ NdrFcShort( 0xffffc42 ), /* Offset= -958 (6) */
/* 966 */ 0x5c,           /* FC_PAD */
                                0x5b,         /* FC_END */
/* 968 */ 0xb4,           /* FC_USER_MARSHAL */
                                0x83,         /* 131 */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x10 ), /* 16 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xffffc32 ), /* Offset= -974 (2) */
/* 978 */
                                0x11, 0x4, /* FC_RP [allocated_on_stack] */
/* 980 */ NdrFcShort( 0x6 ), /* Offset= 6 (986) */
/* 982 */
                                0x13, 0x0, /* FC_OP */
/* 984 */ NdrFcShort( 0xfffffdc ), /* Offset= -36 (948) */
/* 986 */ 0xb4,           /* FC_USER_MARSHAL */
                                0x83,         /* 131 */
/* 988 */ NdrFcShort( 0x0 ), /* 0 */
/* 990 */ NdrFcShort( 0x10 ), /* 16 */
/* 992 */ NdrFcShort( 0x0 ), /* 0 */
/* 994 */ NdrFcShort( 0xffffff4 ), /* Offset= -12 (982) */
                                0x0

```

```

    }
};

const CInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
    (CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
    (CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)    IID_GENERIC_CHECK_IID(
    _tpcc_com_ps, pIID, n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName *) &_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    &_tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* !defined(_M_IA64) && !defined(_M_AXP64)*/

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the proxy stub code */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for \src\tpcc_com_ps.idl:
    Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run,appending), ms_ext, c_ext,
    robust
    error checks: allocation ref bounds_check enum stub_data

```

```

VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#ifdef _M_IA64 || defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high enough to compile this file*/
#ifndef _REDQ_RPCPROXY_H_VERSION_
#define _REQUIRED_RPCPROXY_H_VERSION_ 475
#endif

#include "rpcproxy.h"
#ifndef _RPCPROXY_H_VERSION_
#error this stub requires an updated version of <rpcproxy.h>
#endif // _RPCPROXY_H_VERSION_

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 979
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,
x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,
0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,
0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

```

```

#pragma code_seg(".orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    44,
    88,
    132,
    176,
    220
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    _MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    _MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *)-1 /* ITPCC::NewOrder */,
    (void *)-1 /* ITPCC::Payment */,
    (void *)-1 /* ITPCC::Delivery */,
    (void *)-1 /* ITPCC::StockLevel */,
    (void *)-1 /* ITPCC::OrderStatus */,
    (void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
}

```

```

0,
0,
0,
_MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x50002, /* Ndr library version */
0,
0x5030118, /* MIDL Version 5.3.280 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* Reserved3 */
0, /* Reserved4 */
0 /* Reserved5 */
};

#pragma data_seg(".rdata")

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

#ifdef __RPC_WIN64__
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        FC_AUTO_HANDLE /*
        Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
#ifdef _ALPHA_
        /* 8 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /* axp64 Stack
        size/offset = 48 */
#endif
        /* 10 */ NdrFcShort( 0x0 ), /* 0 */
        /* 12 */ NdrFcShort( 0x8 ), /* 8 */
        /* 14 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
        return, has ext, */
        /* 16 */ 0xa, /* 10 */
        /* 18 */ NdrFcShort( 0x20 ), /* 32 */
        /* 20 */ NdrFcShort( 0x20 ), /* 32 */
        /* 22 */ NdrFcShort( 0x0 ), /* 0 */
        /* 24 */ NdrFcShort( 0x0 ), /* 0 */
        /* Ext Flags: new corr
        desc, clt corr check, srv corr check, */
}
}

```

```

/* Parameter txn_in */
/* 26 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 28 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 30 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 32 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 34 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 36 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 40 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack
size/offset = 40 */
#endif
/* 42 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Payment */

/* 44 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object,
Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
#ifdef _ALPHA_
/* 52 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack
size/offset = 48 */
#endif
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
0x3, /* 3 */
/* 60 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr
desc, clt corr check, srv corr check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 70 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 72 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else

```

```

NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 74 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 76 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 78 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 80 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 84 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack
size/offset = 40 */
#endif
/* 86 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Delivery */

/* 88 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object,
Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
#ifdef _ALPHA_
/* 96 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack
size/offset = 48 */
#endif
/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
0x3, /* 3 */
/* 104 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr
desc, clt corr check, srv corr check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 116 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 118 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

```

```

/* 120 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 122 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 124 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 128 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack
size/offset = 40 */
#endif
/* 130 */ 0x8, /* FC_LONG */
/* 0 */

/* Procedure StockLevel */

/* 132 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object,
Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
#ifdef _ALPHA_
/* 140 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack
size/offset = 48 */
#endif
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
/* 148 */ 0xa, /* 3 */
/* 10 */
0x7, /* Ext Flags: new corr
desc, clt corr check, srv corr check, */
/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 160 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 206 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 210 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 212 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 168 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 172 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack
size/offset = 40 */
#endif
/* 174 */ 0x8, /* FC_LONG */
/* 0 */

/* Procedure OrderStatus */

/* 176 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object,
Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
#ifdef _ALPHA_
/* 184 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack
size/offset = 48 */
#endif
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
/* 192 */ 0xa, /* 3 */
/* 10 */
0x7, /* Ext Flags: new corr
desc, clt corr check, srv corr check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 204 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 206 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 210 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 212 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_

```

```

/* 216 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
                                NdrFcShort( 0x28 ), /* xpp64 Stack
size/offset = 40 */
#endif
/* 218 */ 0x8, /* FC_LONG */
                                0x0, /* 0 */

/* Procedure CallSetComplete */

/* 220 */ 0x33, /* FC_AUTO_HANDLE */
                                0x6c, /* Old Flags: object,
Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64, xpp64 Stack size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44, /* Oi2 Flags: has return, has ext, */
                                0x1, /* 1 */

/* 236 */ 0xa, /* 10 */
                                0x1, /* Ext Flags: new corr
desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

/* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64, xpp64 Stack size/offset = 8 */
/* 250 */ 0x8, /* FC_LONG */
                                0x0, /* 0 */

                                0x0

}
};

static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /* 0 */

/* 2 */
                                0x12, 0x0, /* FC_UP */
/* 4 */ NdrFcShort( 0x39e ), /* Offset= 926 (930) */
/* 6 */
                                0x2b, /*
FC_NON_ENCAPSULATED_UNION */
                                0x9, /* FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT */
                                0x0, /* */
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 14 */ NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */ NdrFcShort( 0x10 ), /* 16 */
/* 18 */ NdrFcShort( 0x2b ), /* 43 */
/* 20 */ NdrFcLong( 0x3 ), /* 3 */
/* 24 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 26 */ NdrFcLong( 0x11 ), /* 17 */
/* 30 */ NdrFcShort( 0x8001 ), /* Simple arm type: FC_BYTE */
/* 32 */ NdrFcLong( 0x2 ), /* 2 */
/* 36 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 38 */ NdrFcLong( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x800a ), /* Simple arm type: FC_FLOAT */
/* 44 */ NdrFcLong( 0x5 ), /* 5 */

/* 48 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE
*/
/* 50 */ NdrFcLong( 0xb ), /* 11 */
/* 54 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 56 */ NdrFcLong( 0xa ), /* 10 */
/* 60 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 62 */ NdrFcLong( 0x6 ), /* 6 */
/* 66 */ NdrFcShort( 0xd6 ), /* Offset= 214 (280) */
/* 68 */ NdrFcLong( 0x7 ), /* 7 */
/* 72 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE
*/
/* 74 */ NdrFcLong( 0x8 ), /* 8 */
/* 78 */ NdrFcShort( 0xd0 ), /* Offset= 208 (286) */
/* 80 */ NdrFcLong( 0xd ), /* 13 */
/* 84 */ NdrFcShort( 0xe4 ), /* Offset= 228 (312) */
/* 86 */ NdrFcLong( 0x9 ), /* 9 */
/* 90 */ NdrFcShort( 0xf0 ), /* Offset= 240 (330) */
/* 92 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 96 */ NdrFcShort( 0xfc ), /* Offset= 252 (348) */
/* 98 */ NdrFcLong( 0x24 ), /* 36 */
/* 102 */ NdrFcShort( 0x2f4 ), /* Offset= 756 (858) */
/* 104 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 108 */ NdrFcShort( 0x2ee ), /* Offset= 750 (858) */
/* 110 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 114 */ NdrFcShort( 0x2ec ), /* Offset= 748 (862) */
/* 116 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 120 */ NdrFcShort( 0x2ea ), /* Offset= 746 (866) */
/* 122 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 126 */ NdrFcShort( 0x2e8 ), /* Offset= 744 (870) */
/* 128 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 132 */ NdrFcShort( 0x2e6 ), /* Offset= 742 (874) */
/* 134 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 138 */ NdrFcShort( 0x2e4 ), /* Offset= 740 (878) */
/* 140 */ NdrFcLong( 0x400b ), /* 16395 */
/* 144 */ NdrFcShort( 0x2d2 ), /* Offset= 722 (866) */
/* 146 */ NdrFcLong( 0x400a ), /* 16394 */
/* 150 */ NdrFcShort( 0x2d0 ), /* Offset= 720 (870) */
/* 152 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 156 */ NdrFcShort( 0x2d6 ), /* Offset= 726 (882) */
/* 158 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 162 */ NdrFcShort( 0x2cc ), /* Offset= 716 (878) */
/* 164 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 168 */ NdrFcShort( 0x2ce ), /* Offset= 718 (886) */
/* 170 */ NdrFcLong( 0x400d ), /* 16397 */
/* 174 */ NdrFcShort( 0x2cc ), /* Offset= 716 (890) */
/* 176 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 180 */ NdrFcShort( 0x2ca ), /* Offset= 714 (894) */
/* 182 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 186 */ NdrFcShort( 0x2c8 ), /* Offset= 712 (898) */
/* 188 */ NdrFcLong( 0x400c ), /* 16396 */
/* 192 */ NdrFcShort( 0x2c6 ), /* Offset= 710 (902) */
/* 194 */ NdrFcLong( 0x10 ), /* 16 */
/* 198 */ NdrFcShort( 0x8002 ), /* Simple arm type: FC_CHAR */
/* 200 */ NdrFcLong( 0x12 ), /* 18 */
/* 204 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 206 */ NdrFcLong( 0x13 ), /* 19 */
/* 210 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 212 */ NdrFcLong( 0x16 ), /* 22 */
/* 216 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 218 */ NdrFcLong( 0x17 ), /* 23 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 224 */ NdrFcLong( 0xe ), /* 14 */
/* 228 */ NdrFcShort( 0x2aa ), /* Offset= 682 (910) */
/* 230 */ NdrFcLong( 0x400e ), /* 16398 */
/* 234 */ NdrFcShort( 0x2b0 ), /* Offset= 688 (922) */
/* 236 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 240 */ NdrFcShort( 0x2ae ), /* Offset= 686 (926) */
/* 242 */ NdrFcLong( 0x4012 ), /* 16402 */

```

```

/* 246 */ NdrFcShort( 0x26c ), /* Offset= 620 (866) */
/* 248 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 252 */ NdrFcShort( 0x26a ), /* Offset= 618 (870) */
/* 254 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 258 */ NdrFcShort( 0x264 ), /* Offset= 612 (870) */
/* 260 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 264 */ NdrFcShort( 0x25e ), /* Offset= 606 (870) */
/* 266 */ NdrFcLong( 0x0 ), /* 0 */
/* 270 */ NdrFcShort( 0x0 ), /* Offset= 0 (270) */
/* 272 */ NdrFcLong( 0x1 ), /* 1 */
/* 276 */ NdrFcShort( 0x0 ), /* Offset= 0 (276) */
/* 278 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (277) */
/* 280 */
0x15, /* FC_STRUCT */
0x7, /* 7 */
/* 282 */ NdrFcShort( 0x8 ), /* 8 */
/* 284 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 286 */
0x12, 0x0, /* FC_UP */
/* 288 */ NdrFcShort( 0xe ), /* Offset= 14 (302) */
/* 290 */
0x1b, /* FC_CARRAY */
0x1, /* 1 */
/* 292 */ NdrFcShort( 0x2 ), /* 2 */
/* 294 */ 0x9, /* Corr desc: FC_ULONG */
0x0, /* */
/* 296 */ NdrFcShort( 0xfffc ), /* -4 */
/* 298 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 300 */ 0x6, /* FC_SHORT */
0x5b, /* FC_END */
/* 302 */
0x17, /* FC_CSTRUCT */
0x3, /* 3 */
/* 304 */ NdrFcShort( 0x8 ), /* 8 */
/* 306 */ NdrFcShort( 0xffffffff ), /* Offset= -16 (290) */
/* 308 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 310 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 312 */
0x2f, /* FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 314 */ NdrFcLong( 0x0 ), /* 0 */
/* 318 */ NdrFcShort( 0x0 ), /* 0 */
/* 320 */ NdrFcShort( 0x0 ), /* 0 */
/* 322 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 324 */ 0x0, /* 0 */
0x0, /* 0 */
/* 326 */ 0x0, /* 0 */
0x0, /* 0 */
/* 328 */ 0x0, /* 0 */
0x46, /* 70 */
/* 330 */
0x2f, /* FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 332 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 336 */ NdrFcShort( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 342 */ 0x0, /* 0 */
0x0, /* 0 */
/* 344 */ 0x0, /* 0 */
0x0, /* 0 */
/* 346 */ 0x0, /* 0 */
0x46, /* 70 */
/* 348 */
[pointer_deref] */
/* 350 */ NdrFcShort( 0x2 ), /* Offset= 2 (352) */
/* 352 */
0x12, 0x0, /* FC_UP */
/* 354 */ NdrFcShort( 0x1e6 ), /* Offset= 486 (840) */
/* 356 */
0x2a, /*
FC_ENCAPSULATED_UNION */
0x89, /* 137 */
/* 358 */ NdrFcShort( 0x20 ), /* 32 */
/* 360 */ NdrFcShort( 0xa ), /* 10 */
/* 362 */ NdrFcLong( 0x8 ), /* 8 */
/* 366 */ NdrFcShort( 0x50 ), /* Offset= 80 (446) */
/* 368 */ NdrFcLong( 0xd ), /* 13 */
/* 372 */ NdrFcShort( 0x70 ), /* Offset= 112 (484) */
/* 374 */ NdrFcLong( 0x9 ), /* 9 */
/* 378 */ NdrFcShort( 0x90 ), /* Offset= 144 (522) */
/* 380 */ NdrFcLong( 0xc ), /* 12 */
/* 384 */ NdrFcShort( 0xb0 ), /* Offset= 176 (560) */
/* 386 */ NdrFcLong( 0x24 ), /* 36 */
/* 390 */ NdrFcShort( 0x104 ), /* Offset= 260 (650) */
/* 392 */ NdrFcLong( 0x800d ), /* 32781 */
/* 396 */ NdrFcShort( 0x120 ), /* Offset= 288 (684) */
/* 398 */ NdrFcLong( 0x10 ), /* 16 */
/* 402 */ NdrFcShort( 0x13a ), /* Offset= 314 (716) */
/* 404 */ NdrFcLong( 0x2 ), /* 2 */
/* 408 */ NdrFcShort( 0x150 ), /* Offset= 336 (744) */
/* 410 */ NdrFcLong( 0x3 ), /* 3 */
/* 414 */ NdrFcShort( 0x166 ), /* Offset= 358 (772) */
/* 416 */ NdrFcLong( 0x14 ), /* 20 */
/* 420 */ NdrFcShort( 0x17c ), /* Offset= 380 (800) */
/* 422 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (421) */
/* 424 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 426 */ NdrFcShort( 0x0 ), /* 0 */
/* 428 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 430 */ NdrFcShort( 0x0 ), /* 0 */
/* 432 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 434 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 438 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 440 */
0x12, 0x0, /* FC_UP */
/* 442 */ NdrFcShort( 0xffffffff74 ), /* Offset= -140 (302) */
/* 444 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 446 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 448 */ NdrFcShort( 0x10 ), /* 16 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ NdrFcShort( 0x6 ), /* Offset= 6 (458) */
/* 454 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 456 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 458 */
0x11, 0x0, /* FC_RP */
/* 460 */ NdrFcShort( 0xfffffdc ), /* Offset= -36 (424) */
/* 462 */

```

```

0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 468 */ NdrFcShort( 0x0 ), /* 0 */
/* 470 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 472 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 476 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 478 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 480 */ NdrFcShort( 0xfffff58 ), /* Offset= -168 (312) */
/* 482 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 484 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 486 */ NdrFcShort( 0x10 ), /* 16 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ NdrFcShort( 0x6 ), /* Offset= 6 (496) */
/* 492 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 494 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 496 */
0x11, 0x0, /* FC_RP */
/* 498 */ NdrFcShort( 0xfffff4c ), /* Offset= -36 (462) */
/* 500 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 502 */ NdrFcShort( 0x0 ), /* 0 */
/* 504 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 510 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 514 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 518 */ NdrFcShort( 0xfffff44 ), /* Offset= -188 (330) */
/* 520 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 522 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 524 */ NdrFcShort( 0x10 ), /* 16 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 532 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 534 */
0x11, 0x0, /* FC_RP */
/* 536 */ NdrFcShort( 0xfffff4c ), /* Offset= -36 (500) */
/* 538 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 540 */ NdrFcShort( 0x0 ), /* 0 */
/* 542 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 548 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 552 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 554 */
0x12, 0x0, /* FC_UP */
/* 556 */ NdrFcShort( 0x176 ), /* Offset= 374 (930) */
/* 558 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 560 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 562 */ NdrFcShort( 0x10 ), /* 16 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ NdrFcShort( 0x6 ), /* Offset= 6 (572) */
/* 568 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 570 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 572 */
0x11, 0x0, /* FC_RP */
/* 574 */ NdrFcShort( 0xfffff4c ), /* Offset= -36 (538) */
/* 576 */
0x2f, /* FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 578 */ NdrFcLong( 0x2f ), /* 47 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ NdrFcShort( 0x0 ), /* 0 */
/* 586 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 588 */ 0x0, /* 0 */
0x0, /* 0 */
/* 590 */ 0x0, /* 0 */
0x0, /* 0 */
/* 592 */ 0x0, /* 0 */
0x46, /* 70 */
/* 594 */
0x1b, /* FC_CARRAY */
0x0, /* 0 */
/* 596 */ NdrFcShort( 0x1 ), /* 1 */
/* 598 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 600 */ NdrFcShort( 0x4 ), /* 4 */
/* 602 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 604 */ 0x1, /* FC_BYTE */
0x5b, /* FC_END */
/* 606 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 608 */ NdrFcShort( 0x18 ), /* 24 */
/* 610 */ NdrFcShort( 0x0 ), /* 0 */
/* 612 */ NdrFcShort( 0xc ), /* Offset= 12 (624) */
/* 614 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 616 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 618 */ NdrFcShort( 0xfffff46 ), /* Offset= -42 (576) */
/* 620 */ 0x39, /* FC_ALIGNM8 */
0x36, /* FC_POINTER */
/* 622 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 624 */
0x12, 0x0, /* FC_UP */
/* 626 */ NdrFcShort( 0xfffff40 ), /* Offset= -32 (594) */
/* 628 */
0x21, /*
FC_BOGUS_ARRAY */

```



```

0x3, /* 3 */
/* 630 */ NdrFcShort( 0x0 ), /* 0 */
/* 632 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
/* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 636 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 638 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 642 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 644 */
0x12, 0x0, /* FC_UP */
/* 646 */ NdrFcShort( 0xfffffd8 ), /* Offset= -40 (606) */
/* 648 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 650 */
0x1a, /*
FC_BOGUS_STRUCT */
/* 652 */ NdrFcShort( 0x10 ), /* 16 */
/* 654 */ NdrFcShort( 0x0 ), /* 0 */
/* 656 */ NdrFcShort( 0x6 ), /* Offset= 6 (662) */
/* 658 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 660 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 662 */
0x11, 0x0, /* FC_RP */
/* 664 */ NdrFcShort( 0xfffffdc ), /* Offset= -36 (628) */
/* 666 */
0x1d, /* FC_SMFARRAY */
0x0, /* 0 */
/* 668 */ NdrFcShort( 0x8 ), /* 8 */
/* 670 */ 0x2, /* FC_CHAR */
0x5b, /* FC_END */
/* 672 */
0x15, /* FC_STRUCT */
0x3, /* 3 */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ 0x8, /* FC_LONG */
0x6, /* FC_SHORT */
/* 678 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 680 */ 0x0, /* 0 */
NdrFcShort( 0xfffff1 ), /* Offset=
-15 (666) */
0x5b, /* FC_END */
/* 684 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 686 */ NdrFcShort( 0x20 ), /* 32 */
/* 688 */ NdrFcShort( 0x0 ), /* 0 */
/* 690 */ NdrFcShort( 0xa ), /* Offset= 10 (700) */
/* 692 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 694 */ 0x36, /* FC_POINTER */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 696 */ 0x0, /* 0 */
NdrFcShort( 0xfffff7 ), /* Offset=
-25 (672) */
0x5b, /* FC_END */
/* 700 */
0x11, 0x0, /* FC_RP */
/* 702 */ NdrFcShort( 0xfffff10 ), /* Offset= -240 (462) */
/* 704 */
0x1b, /* FC_CARRAY */
0x0, /* 0 */
/* 706 */ NdrFcShort( 0x1 ), /* 1 */
/* 708 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 714 */ 0x1, /* FC_BYTE */
0x5b, /* FC_END */
/* 716 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 718 */ NdrFcShort( 0x10 ), /* 16 */
/* 720 */ NdrFcShort( 0x0 ), /* 0 */
/* 722 */ NdrFcShort( 0x6 ), /* Offset= 6 (728) */
/* 724 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 726 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 728 */
0x12, 0x0, /* FC_UP */
/* 730 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (704) */
/* 732 */
0x1b, /* FC_CARRAY */
0x1, /* 1 */
/* 734 */ NdrFcShort( 0x2 ), /* 2 */
/* 736 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
/* 738 */ NdrFcShort( 0x0 ), /* 0 */
/* 740 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 742 */ 0x6, /* FC_SHORT */
0x5b, /* FC_END */
/* 744 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 746 */ NdrFcShort( 0x10 ), /* 16 */
/* 748 */ NdrFcShort( 0x0 ), /* 0 */
/* 750 */ NdrFcShort( 0x6 ), /* Offset= 6 (756) */
/* 752 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 754 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 756 */
0x12, 0x0, /* FC_UP */
/* 758 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (732) */
/* 760 */
0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 762 */ NdrFcShort( 0x4 ), /* 4 */
/* 764 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
/* 766 */ NdrFcShort( 0x0 ), /* 0 */
/* 768 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 770 */ 0x8, /* FC_LONG */
0x5b, /* FC_END */
/* 772 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 774 */ NdrFcShort( 0x10 ), /* 16 */
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ NdrFcShort( 0x6 ), /* Offset= 6 (784) */
/* 780 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 782 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 784 */
0x12, 0x0, /* FC_UP */

```

```

/* 786 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (760) */
/* 788 */
0x1b, /* FC_CARRAY */
0x7, /* 7 */
/* 790 */ NdrFcShort( 0x8 ), /* 8 */
/* 792 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 794 */ NdrFcShort( 0x0 ), /* 0 */
/* 796 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 798 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 800 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 802 */ NdrFcShort( 0x10 ), /* 16 */
/* 804 */ NdrFcShort( 0x0 ), /* 0 */
/* 806 */ NdrFcShort( 0x6 ), /* Offset= 6 (812) */
/* 808 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 810 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 812 */
0x12, 0x0, /* FC_UP */
/* 814 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (788) */
/* 816 */
0x15, /* FC_STRUCT */
0x3, /* 3 */
/* 818 */ NdrFcShort( 0x8 ), /* 8 */
/* 820 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 822 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 824 */
0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 826 */ NdrFcShort( 0x8 ), /* 8 */
/* 828 */ 0x7, /* Corr desc: FC_USHORT */
0x0, /* */
/* 830 */ NdrFcShort( 0xffc8 ), /* -56 */
/* 832 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 834 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 836 */ NdrFcShort( 0xfffffec ), /* Offset= -20 (816) */
/* 838 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 840 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 842 */ NdrFcShort( 0x38 ), /* 56 */
/* 844 */ NdrFcShort( 0xfffffec ), /* Offset= -20 (824) */
/* 846 */ NdrFcShort( 0x0 ), /* Offset= 0 (846) */
/* 848 */ 0x6, /* FC_SHORT */
0x6, /* FC_SHORT */
/* 850 */ 0x38, /* FC_ALIGNM4 */
0x8, /* FC_LONG */
/* 852 */ 0x8, /* FC_LONG */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 854 */ 0x4, /* 4 */
NdrFcShort( 0xffffe0d ), /* Offset=
-499 (356) */
0x5b, /* FC_END */
/* 858 */
0x12, 0x0, /* FC_UP */
/* 860 */ NdrFcShort( 0xfffff02 ), /* Offset= -254 (606) */
/* 862 */
0x1, /* FC_UP [simple_pointer] */
/* FC_BYTE */
0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_SHORT */
0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_LONG */
0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_FLOAT */
0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_DOUBLE */
0x5c, /* FC_PAD */
0x12, 0x0, /* FC_UP */
/* 884 */ NdrFcShort( 0xffffda4 ), /* Offset= -604 (280) */
/* 886 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 888 */ NdrFcShort( 0xffffda6 ), /* Offset= -602 (286) */
/* 890 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 892 */ NdrFcShort( 0xffffdbc ), /* Offset= -580 (312) */
/* 894 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 896 */ NdrFcShort( 0xffffdca ), /* Offset= -566 (330) */
/* 898 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 900 */ NdrFcShort( 0xffffdd8 ), /* Offset= -552 (348) */
/* 902 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 904 */ NdrFcShort( 0x2 ), /* Offset= 2 (906) */
/* 906 */
0x12, 0x0, /* FC_UP */
/* 908 */ NdrFcShort( 0x16 ), /* Offset= 22 (930) */
/* 910 */
0x15, /* FC_STRUCT */
0x7, /* 7 */
/* 912 */ NdrFcShort( 0x10 ), /* 16 */
/* 914 */ 0x6, /* FC_SHORT */
0x1, /* FC_BYTE */
/* 916 */ 0x1, /* FC_BYTE */
0x38, /* FC_ALIGNM4 */
/* 918 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 920 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 922 */
0x12, 0x0, /* FC_UP */
/* 924 */ NdrFcShort( 0xfffff2 ), /* Offset= -14 (910) */
/* 926 */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_CHAR */
0x5c, /* FC_PAD */
0x1a, /*
FC_BOGUS_STRUCT */
0x7, /* 7 */

```

```

/* 932 */ NdrFcShort( 0x20 ), /* 32 */
/* 934 */ NdrFcShort( 0x0 ), /* 0 */
/* 936 */ NdrFcShort( 0x0 ), /* Offset= 0 (936) */
/* 938 */ 0x8, /* FC_LONG */
/* 940 */ 0x6, /* FC_SHORT */
/* 942 */ 0x6, /* FC_SHORT */
/* 944 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
/* 946 */ NdrFcShort( 0xffffc54 ), /* Offset= -940 (6) */
/* 948 */ 0x5c, /* FC_PAD */
/* 950 */ 0xb4, /* FC_USER_MARSHAL */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x18 ), /* 24 */
/* 956 */ NdrFcShort( 0x0 ), /* 0 */
/* 958 */ NdrFcShort( 0xffffc44 ), /* Offset= -956 (2) */
/* 960 */
/* 962 */ NdrFcShort( 0x6 ), /* Offset= 6 (968) */
/* 964 */
/* 966 */ NdrFcShort( 0xfffffdc ), /* Offset= -36 (930) */
/* 968 */ 0xb4, /* FC_USER_MARSHAL */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x18 ), /* 24 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffff4 ), /* Offset= -12 (964) */

0x0
}
};

const CInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
( CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
0
};

const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
( CInterfaceStubVtbl *) &_ITPCCStubVtbl,
0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
"ITPCC",
0
};

#define _tpcc_com_ps_CHECK_IID(n) IID_GENERIC_CHECK_IID(
_tpcc_com_ps, pIID, n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
if(!_tpcc_com_ps_CHECK_IID(0))
{
*pIndex = 0;
return 1;
}
}

```

```

return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
(PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
(PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
(const PCInterfaceName *) &_tpcc_com_ps_InterfaceNamesList,
0, // no delegation
&_tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uuid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0 /* Filler3 */
};

#endif /* defined(_M_IA64) || defined(_M_AXP64) */

```

## tpcc\_dblib.cpp

```

/* FILE: TPCC_DBLIB.CPP
* Microsoft TPC-C Kit Ver.
4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
* Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
* PURPOSE: Implements dblib calls for TPC-C txns.
* Contact: Charles Levine (clevine@microsoft.com)
*
* Change history:
* 4.20.000 - updated rev number to match kit
* 4.10.001 - not deleting error class in catch handler on
deadlock retry;
* not a functional bug, but a
memory leak
* - had to tweak some declarations
to compile with latest SDK; no functional change
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqlldb.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DIIDDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE 4096

```

```

// version string; must match return value from tpcc_version stored proc
const char sVersion[] = "4.10.000";

const          iMaxRetries = 10;          // how many
retries on deadlock
static long    iConnectionCount = 0; // number of current dblink
connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL WINAPI DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit();          // initialize dblink
            break;

        case DLL_PROCESS_DETACH:
            dbexit();         // close all dblink
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB          *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity, dberr, oserr, dberrstr,
oserrstr );
    }
    return INT_CANCEL;
}

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity, char *msgtext)
*
* PURPOSE:      This function handles DB-Library SQL Server error
messages
*
* ARGUMENTS:   DBPROCESS          *dbproc
DBPROCESS id pointer
*
*              DBINT
msgno          message number
*              int
msgstate      message state
*              int
severity      message severity
*              char
*msgtext      printable message description
*

```

```

* RETURNS:      int
INT_CONTINUE   continue if error is SQLETIME else INT_CANCEL
action
*
INT_CANCEL     cancel operation
*
* COMMENTS:    This function also sets the dead lock dbproc variable if
necessary.
*
*/

// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS, DBINT,
INT, INT, LPCSTR, LPCSTR, LPCSTR, DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity,
LPCSTR msgtext, LPCSTR
srvname, LPCSTR procname, DBUSMALLINT line)
{
    CTPCC_DBLIB          *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno, msgstate, severity, msgtext
);
    }

    return 0;
}

/* FUNCTION: void UtilStrCpy(char * pDest, char * pSrc, int n)
*
* PURPOSE:      This function copies n characters from string pSrc to pDst
and places a
*
*              null character at the end of the destination
string.
*
* ARGUMENTS:   char          *pDest  destination
string pointer
*              char
*pSrc          source string pointer
*              int
n              number of characters to copy
*
* RETURNS:      None
*
* COMMENTS:    Unlike strncpy this function ensures that the result string
is
*
*              always null terminated.
*
*/

inline static void UtilStrCpy(char * pDest, const BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*
*
*/

char* CTPCC_DBLIB_ERR::ErrorText(void)

```

```

{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRIED_TRANS,
        "Retries before transaction succeeded." },
        { 0,
        "" }
    };

    static char szNotFound[] = "Unknown error number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_erno == errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer,          // name of SQL server
    LPCSTR szUser,           // user name for login
    LPCSTR szPassword,       // password for login
    LPCSTR szHost,           // workstation name;
    LPCSTR szDatabase )      // name of database to use
shows up in sp_who; max 30 chars, only first 10 kept by SQL Server
{
    return new CTPCC_DBLIB( szServer, szUser, szPassword, szHost,
szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer,          // name of SQL server
    LPCSTR szUser,           // user name for login
    LPCSTR szPassword,       // password for login
    LPCSTR szHost,           // workstation name;
    LPCSTR szDatabase )      // name of database to use
shows up in sp_who; max 30 chars, only first 10 kept by SQL Server
{
    LOGINREC *login;
    const BYTE *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

    m_MaxRetries = 10;          // how many retries on deadlock

    // increase max number of connections if getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5) )
    {
        if ( dbsetmaxprocs(iConnectionCount+10) == FAIL )
            ThrowError(CDBLIBERR::eDbSetMaxProcs);
        }

        // allocate a login structure
        login = dblogin();
        if (login == NULL)
            ThrowError(CDBLIBERR::eLogin);
        InterlockedIncrement( &iConnectionCount );

        // register error and message handler functions
        if (dbproccerrhandle(login, err_handler) == NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);
        if (dbprocmsghandle(login, msg_handler) == NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        DBSETLUSER(login, szUser);
        DBSETLPWD(login, szPassword);
        DBSETLHOST(login, szHost);
        DBSETLPACKET(login, (unsigned short)DEFCLPCKSIZE);
        DBSETLVERSION(login, DBVER60);          // use dblib
        ver 6.0 client behavior

        // set time to wait for login
        if (dbsetlogintime(60) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        // set time to wait for statement execution
        if (dbsettime(180) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        m_dbproc = dbopen(login, szServer);

        // deallocate login structure before checking for success
        dbfreelogin( login );

        if (m_dbproc == NULL)
            ThrowError(CDBLIBERR::eDbOpen);

        // save address of class instance so that the message and error
        handler
        // can get to data.
        dbsetuserdata(m_dbproc, (LPVOID)this);

        // Use the the right database
        if (dbuse(m_dbproc, szDatabase) == FAIL)
            ThrowError(CDBLIBERR::eDbUse);

        dbcmd(m_dbproc, "set nocount on ");          //
        // do not return row counts
        dbcmd(m_dbproc, "set XACT_ABORT ON");          //
        // rollback transaction on abort

        if (dbsqlexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbSqlExec);

        DiscardNextResults(2);

        // verify that version of stored procs on server is correct
        dbrpcinit(m_dbproc, "tpcc_version", 0);

        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc) != SUCCEED)

```

```

        ThrowError(CDBLIBERR::eDbResults);

    if (dbnextrow(m_dbproc) != REG_ROW)
        ThrowError(CDBLIBERR::eDbNextRow);

    char szSrvVersion[16];
    pData=dbdata(m_dbproc, 1);
    if (pData)
        UtilStrCpy(szSrvVersion, pData, dbdatlen(m_dbproc,
1));
    else
        szSrvVersion[0]=0;
    if (strcmp(szSrvVersion,sVersion))
        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

    DiscardNextRows(0);
    DiscardNextResults(0);
}

CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int dberr, int oserr, LPCSTR
dberrstr, LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new CDBLIBERR(CDBLIBERR::eUnknown,
severity, dberr, oserr);

    if (dberrstr != NULL)
    {
        m_DbLibErr->m_dberrstr = new char[ strlen(dberrstr)+1
];
        strcpy( m_DbLibErr->m_dberrstr, dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new char[ strlen(oserrstr)+1
];
        strcpy( m_DbLibErr->m_oserrstr, oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno, int msgstate, int
severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)

```

```

    {
        m_SqlErr->m_msgtext = new char[ strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext, msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if yes, throw it and ignore any
DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLERR *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our pointer to instance;
        catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to happen, since it means that an
error was returned
        // but the error handlers were not called.
        pDbLibErr = new CDBLIBERR(eAction);
    else
    {
        pDbLibErr = m_DbLibErr;
        pDbLibErr->m_eAction = eAction;
        m_DbLibErr = NULL; // clear our
        pointer to instance; catch handler will delete
    }

    throw pDbLibErr;
}

// Read and discard rows until no more. Throw an exception if number of rows
read doesn't
// match number of rows expected. The row count will be ignored if the
expected count value
// passed in is negative. A typical use of this routine is to verify that there are
no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int iRowsRead = 0;
    RETCODE rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >= 0)

                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }
}

```

```

        if ((iExpectedCount >= 0) &&
            (iExpectedCount != iRowsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

    // Read and discard results until no more. Throw an exception if number of
    // result sets read doesn't
    // match number expected. The result set count will be ignored if the expected
    // count value
    // passed in is negative. A typical use of this routine is to verify that there are
    // no more
    // result sets to be read.
    void CTPCC_DBLIB::DiscardNextResults(int iExpectedCount)
    {
        int                iResultsRead = 0;
        RETCODE            rc;

        while (TRUE)
        {
            rc = dbresults(m_dbproc);
            if (rc == NO_MORE_RESULTS)
                break;
            if (rc == FAIL)
            {
                if (iExpectedCount >= 0)

                    ThrowError(CDBLIBERR::eDbResults);
                else
                    break;
            }

            DiscardNextRows(-1);
            iResultsRead++;
        }

        if ((iExpectedCount >= 0) &&
            (iExpectedCount != iResultsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

    void CTPCC_DBLIB::StockLevel()
    {
        int                iTryCount = 0;
        const BYTE         *pData;

        ResetError();

        while (TRUE)
        {
            try
            {
                dbrpcinit(m_dbproc, "tpcc_stocklevel", 0);

                dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
                    -1, -1, (BYTE *) &m_txn.StockLevel.w_id); // @w_id smallint
                dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
                    -1, -1, (BYTE *) &m_txn.StockLevel.d_id); // @d_id tinyint
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
                    -1, -1, (BYTE *) &m_txn.StockLevel.threshold); // @threshold smallint

                if (dbrpcexec(m_dbproc) == FAIL)

                    ThrowError(CDBLIBERR::eDbRpcExec);

                if (dbresults(m_dbproc) != SUCCEEDED)

                    ThrowError(CDBLIBERR::eDbResults);
            }
        }
    }

```

```

        if (dbnextrow(m_dbproc) != REG_ROW)

            ThrowError(CDBLIBERR::eDbNextRow);

        if (pData=dbdata(m_dbproc, 1))
            m_txn.StockLevel.low_stock =

                *((long *) pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.StockLevel.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
            (e->m_msgno ==

                iErrOleDbProvider &&
                sErrTimeoutExpired) != NULL)) &&
            (e->m_msgtext,
                (++iTryCount <= iMaxRetries))
            {
                // hit deadlock; backoff for
                increasingly longer period

                delete e;
                Sleep(10 * iTryCount);
            }
            else
                throw;
        }
    } // while (TRUE)

    //if (iTryCount)
    //    throw new
    CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
        iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                i;
    DBINT              commit_flag;
    DBDATE TIME        datetime;
    DBDATE REC         daterec;

    int                iTryCount = 0;
    const BYTE         *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_neworder", 0);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
                -1, -1, (BYTE *) &m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
                -1, -1, (BYTE *) &m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4,
                -1, -1, (BYTE *) &m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
                -1, -1, (BYTE *) &m_txn.NewOrder.o_ol_cnt);
        }
    }
}

```

```

// check whether any order lines are for a
remote warehouse
    m_txn.NewOrder.o_all_local = 1;
    for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
    {
        if
(m_txn.NewOrder.OL[i].ol_supply_w_id != m_txn.NewOrder.w_id)
        {
m_txn.NewOrder.o_all_local = 0; // at least one remote warehouse
                                break;
        }
    }
    dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.NewOrder.o_all_local);

    for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
    {
        dbrpcparam(m_dbproc, NULL, 0,
SQLINT4, -1, -1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);
        dbrpcparam(m_dbproc, NULL, 0,
SQLINT2, -1, -1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);
        dbrpcparam(m_dbproc, NULL, 0,
SQLINT2, -1, -1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
    }

    if (dbrpcexec(m_dbproc) == FAIL)

ThrowError(CDBLIBERR::eDbRpcExec);

// Get order line results
m_txn.NewOrder.total_amount = 0;

    for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
    {
        if (dbresults(m_dbproc) !=
SUCCEED)

ThrowError(CDBLIBERR::eDbResults);

        if (dbnumcols(m_dbproc) != 5)

ThrowError(CDBLIBERR::eWrongNumCols);

        if (dbnextrow(m_dbproc) !=
REG_ROW)

ThrowError(CDBLIBERR::eDbNextRow);

        if (pData=dbdata(m_dbproc, 1))

UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name, pData, dbdatlen(m_dbproc, 1));
        if (pData=dbdata(m_dbproc, 2))

m_txn.NewOrder.OL[i].ol_stock = (*(DBSMALLINT *) pData);
        if (pData=dbdata(m_dbproc, 3))

UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_generic, pData,
dbdatlen(m_dbproc, 3));
        if (pData=dbdata(m_dbproc, 4))
            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);
        if (pData=dbdata(m_dbproc, 5))

```

```

            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

        m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount + m_txn.NewOrder.OL[i].ol_amount;

        DiscardNextRows(0);
    }

// get remaining values for w_tax, d_tax, o_id,
c_last, c_discount, c_credit, o_entry_d, commit_flag
    if (dbresults(m_dbproc) != SUCCEED)

ThrowError(CDBLIBERR::eDbResults);

    if (dbnextrow(m_dbproc) != REG_ROW)

ThrowError(CDBLIBERR::eDbNextRow);

    if (dbnumcols(m_dbproc) != 8)

ThrowError(CDBLIBERR::eWrongNumCols);

    if (pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);
        if (pData=dbdata(m_dbproc, 2))

        dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);
        if (pData=dbdata(m_dbproc, 3))
            m_txn.NewOrder.o_id =
(*(DBINT *) pData);
        if (pData=dbdata(m_dbproc, 4))

UtilStrCpy(m_txn.NewOrder.c_last, pData, dbdatlen(m_dbproc, 4));
        if (pData=dbdata(m_dbproc, 5))
            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
        if (pData=dbdata(m_dbproc, 6))

UtilStrCpy(m_txn.NewOrder.c_credit, pData, dbdatlen(m_dbproc, 6));
        if (pData=dbdata(m_dbproc, 7))
        {
            datetime = *((DBDATETIME *)
pData);
            dbdatecrack(m_dbproc, &daterec,
&datetime);
            m_txn.NewOrder.o_entry_d.year
= daterec.year;
            m_txn.NewOrder.o_entry_d.month
= daterec.month;
            m_txn.NewOrder.o_entry_d.day
= daterec.day;
            m_txn.NewOrder.o_entry_d.hour
= daterec.hour;
            m_txn.NewOrder.o_entry_d.minute = daterec.minute;
            m_txn.NewOrder.o_entry_d.second = daterec.second;

```



```

    }
    if (pData=dbdata(m_dbproc, 8))
        commit_flag = *(DBTINYINT *)
pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (commit_flag == 1)
        {
            m_txn.NewOrder.total_amount *=
((1 + m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

m_txn.NewOrder.exec_status_code = eOK;
        }
        else

m_txn.NewOrder.exec_status_code = eInvalidItem;

            return;
        }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno == 1205 ||
(e->m_msgno ==
iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)) &&
                strstr(e->m_msgtext,
                    (++iTryCount <= iMaxRetries))
                {
                    // hit deadlock; backoff for
                    delete e;
                    Sleep(10 * iTryCount);
                }
                else
                    throw;
            }
        } // while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME    datetime;
    DBDATEREC    daterec;

    int            iTryCount = 0;
    const BYTE    *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_payment", 0);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
-1, -1, (BYTE *) &m_txn.Payment.w_id);

            dbrpcparam(m_dbproc, NULL, 0, SQLFLT8,
-1, -1, (BYTE *) &m_txn.Payment.h_amount);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.Payment.d_id);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.Payment.c_d_id);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT4,
-1, -1, (BYTE *) &m_txn.Payment.c_id);

            // if customer id is zero, then payment is by
            name
            if (m_txn.Payment.c_id == 0)
                dbrpcparam(m_dbproc, NULL, 0,
SQLCHAR, -1, strlen(m_txn.Payment.c_last), (unsigned char
*)m_txn.Payment.c_last);

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc) != 27)
                ThrowError(CDBLIBERR::eWrongNumCols);

            if (pData=dbdata(m_dbproc, 1))
                m_txn.Payment.c_id = *((DBINT
*) pData);

            if (pData=dbdata(m_dbproc, 2))
                UtilStrCpy(m_txn.Payment.c_last,
pData, dbdatlen(m_dbproc, 2));

            if (pData=dbdata(m_dbproc, 3))
            {
                datetime = *((DBDATETIME *)
pData);
                dbdatecrack(m_dbproc, &daterec,
&datetime);
                m_txn.Payment.h_date.year =
daterec.year;
                m_txn.Payment.h_date.month =
daterec.month;
                m_txn.Payment.h_date.day =
daterec.day;
                m_txn.Payment.h_date.hour =
daterec.hour;
                m_txn.Payment.h_date.minute =
daterec.minute;
                m_txn.Payment.h_date.second =
daterec.second;
            }

            if (pData=dbdata(m_dbproc, 4))
                UtilStrCpy(m_txn.Payment.w_street_1, pData, dbdatlen(m_dbproc, 4));

            if (pData=dbdata(m_dbproc, 5))
                UtilStrCpy(m_txn.Payment.w_street_2, pData, dbdatlen(m_dbproc, 5));

            if (pData=dbdata(m_dbproc, 6))
                UtilStrCpy(m_txn.Payment.w_city, pData, dbdatlen(m_dbproc, 6));
        }
    }
}

```

```

        if (pData=dbdata(m_dbproc, 7))
UtilStrCpy(m_txn.Payment.w_state, pData, dbdatlen(m_dbproc, 7));
        if (pData=dbdata(m_dbproc, 8))
            UtilStrCpy(m_txn.Payment.w_zip,
pData, dbdatlen(m_dbproc, 8));
        if (pData=dbdata(m_dbproc, 9))
UtilStrCpy(m_txn.Payment.d_street_1, pData, dbdatlen(m_dbproc, 9));
        if (pData=dbdata(m_dbproc, 10))
UtilStrCpy(m_txn.Payment.d_street_2, pData, dbdatlen(m_dbproc, 10));
        if (pData=dbdata(m_dbproc, 11))
            UtilStrCpy(m_txn.Payment.d_city,
pData, dbdatlen(m_dbproc, 11));
        if (pData=dbdata(m_dbproc, 12))
UtilStrCpy(m_txn.Payment.d_state, pData, dbdatlen(m_dbproc, 12));
        if (pData=dbdata(m_dbproc, 13))
            UtilStrCpy(m_txn.Payment.d_zip,
pData, dbdatlen(m_dbproc, 13));
        if (pData=dbdata(m_dbproc, 14))
            UtilStrCpy(m_txn.Payment.c_first,
pData, dbdatlen(m_dbproc, 14));
        if (pData=dbdata(m_dbproc, 15))
UtilStrCpy(m_txn.Payment.c_middle, pData, dbdatlen(m_dbproc, 15));
        if (pData=dbdata(m_dbproc, 16))
UtilStrCpy(m_txn.Payment.c_street_1, pData, dbdatlen(m_dbproc, 16));
        if (pData=dbdata(m_dbproc, 17))
UtilStrCpy(m_txn.Payment.c_street_2, pData, dbdatlen(m_dbproc, 17));
        if (pData=dbdata(m_dbproc, 18))
            UtilStrCpy(m_txn.Payment.c_city,
pData, dbdatlen(m_dbproc, 18));
        if (pData=dbdata(m_dbproc, 19))
UtilStrCpy(m_txn.Payment.c_state, pData, dbdatlen(m_dbproc, 19));
        if (pData=dbdata(m_dbproc, 20))
            UtilStrCpy(m_txn.Payment.c_zip,
pData, dbdatlen(m_dbproc, 20));
        if (pData=dbdata(m_dbproc, 21))
UtilStrCpy(m_txn.Payment.c_phone, pData, dbdatlen(m_dbproc, 21));
        if (pData=dbdata(m_dbproc, 22))
        {
            datetime = *((DBDATETIME *)
pData);
            dbdatecrack(m_dbproc, &daterec,
&datetime);
            m_txn.Payment.c_since.year =
daterec.year;
            m_txn.Payment.c_since.month =
daterec.month;
            m_txn.Payment.c_since.day =
daterec.day;
            m_txn.Payment.c_since.hour =
daterec.hour;
            m_txn.Payment.c_since.minute =
daterec.minute;
            m_txn.Payment.c_since.second =
daterec.second;
        }
        if (pData=dbdata(m_dbproc, 23))
UtilStrCpy(m_txn.Payment.c_credit, pData, dbdatlen(m_dbproc, 23));
        if (pData=dbdata(m_dbproc, 24))
            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,24), SQLFLT8,
(BYTE *)&m_txn.Payment.c_credit_lim, 8);
            if (pData=dbdata(m_dbproc, 25))
                dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,25), SQLFLT8,
(BYTE *)&m_txn.Payment.c_discount, 8);
            if (pData=dbdata(m_dbproc, 26))
                dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,26), SQLFLT8,
(BYTE *)&m_txn.Payment.c_balance, 8);
            if (pData=dbdata(m_dbproc, 27))
                UtilStrCpy(m_txn.Payment.c_data,
pData, dbdatlen(m_dbproc, 27));
                DiscardNextRows(0);
                DiscardNextResults(0);
                if (m_txn.Payment.c_id == 0)
                    throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
                else
                    m_txn.Payment.exec_status_code
= eOK;
                return;
            }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno == 1205 ||
(e->m_msgno ==
iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)) &&
                strstr(e->m_msgtext,
(++iTryCount <= iMaxRetries))
                {
                    // hit deadlock; backoff for
                    increasingly longer period
                    delete e;
                    Sleep(10 * iTryCount);
                }
            else
                throw;
        }
    } // while (TRUE)
    // if (iTryCount)
    // throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}
void CTPCC_DBLIB::OrderStatus()
{
    int i;
    DBDATETIME datetime;
    DBDATEREC daterec;
    int iTryCount = 0;
    RETCODE rc;
    const BYTE *pData;
    ResetError();
    while (TRUE)

```

```

{
    try
    {
        dbrpcinit(m_dbproc, "tpcc_orderstatus", 0);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
-1, -1, (BYTE *) &m_txn.OrderStatus.w_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.OrderStatus.d_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT4,
-1, -1, (BYTE *) &m_txn.OrderStatus.c_id);

        // if customer id is zero, then order status is by
name
        if (m_txn.OrderStatus.c_id == 0)
            dbrpcparam(m_dbproc, NULL, 0,
SQLCHAR, -1, strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);

        if (dbrpcexec(m_dbproc) == FAIL)
ThrowError(CDBLIBERR::eDbRpcExec);

        // Get order lines
        if (dbresults(m_dbproc) != SUCCEED)
        {
            if ((m_DbLibErr == NULL) &&
(m_SqlErr == NULL))
                throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
            else
ThrowError(CDBLIBERR::eDbResults);
        }

        if (dbnumcols(m_dbproc) != 5)
ThrowError(CDBLIBERR::eWrongNumCols);

        i = 0;
        while (TRUE)
        {
            rc = dbnextrow(m_dbproc);
            if (rc == NO_MORE_ROWS)
                break;
            if (rc != REG_ROW)

ThrowError(CDBLIBERR::eDbNextRow);

            if(pData=dbdata(m_dbproc, 1))

m_txn.OrderStatus.OL[i].ol_supply_w_id = (*(DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc, 2))

m_txn.OrderStatus.OL[i].ol_i_id = (*(DBINT *) pData);
            if(pData=dbdata(m_dbproc, 3))

m_txn.OrderStatus.OL[i].ol_quantity = (*(DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc, 4))
                dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE *)&m_txn.OrderStatus.OL[i].ol_amount, 8);
            if(pData=dbdata(m_dbproc, 5))
            {
                datetime =
*(DBDATETIME *) pData);
                dbdatecrack(m_dbproc,
&daterec, &datetime);
                m_txn.OrderStatus.OL[i].ol_delivery_d.year = daterec.year;
                m_txn.OrderStatus.OL[i].ol_delivery_d.month = daterec.month;
                m_txn.OrderStatus.OL[i].ol_delivery_d.day = daterec.day;
                m_txn.OrderStatus.OL[i].ol_delivery_d.hour = daterec.hour;
                m_txn.OrderStatus.OL[i].ol_delivery_d.minute = daterec.minute;
                m_txn.OrderStatus.OL[i].ol_delivery_d.second = daterec.second;
            }
            i++;
        }
        m_txn.OrderStatus.o_ol_cnt = i;

        if (dbresults(m_dbproc) != SUCCEED)
ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc) != 8)
ThrowError(CDBLIBERR::eWrongNumCols);

        if(pData=dbdata(m_dbproc, 1))
            m_txn.OrderStatus.c_id =
*(DBINT *) pData);
        if(pData=dbdata(m_dbproc, 2))
UtilStrCpy(m_txn.OrderStatus.c_last, pData, dbdatlen(m_dbproc,2));
        if(pData=dbdata(m_dbproc, 3))
UtilStrCpy(m_txn.OrderStatus.c_first, pData, dbdatlen(m_dbproc,3));
        if(pData=dbdata(m_dbproc, 4))
UtilStrCpy(m_txn.OrderStatus.c_middle, pData, dbdatlen(m_dbproc, 4));

        if(pData=dbdata(m_dbproc, 5))
        {
            datetime = *(DBDATETIME *)
                dbdatecrack(m_dbproc, &daterec,
                m_txn.OrderStatus.o_entry_d.year
                = daterec.year;
                m_txn.OrderStatus.o_entry_d.month = daterec.month;
                m_txn.OrderStatus.o_entry_d.day
                = daterec.day;
                m_txn.OrderStatus.o_entry_d.hour
                = daterec.hour;
                m_txn.OrderStatus.o_entry_d.minute = daterec.minute;
                m_txn.OrderStatus.o_entry_d.second = daterec.second;
        }
        if(pData=dbdata(m_dbproc, 6))
            m_txn.OrderStatus.o_carrier_id =
*(DBSMALLINT *) pData);
    }
}

```

```

                if(pData=dbdata(m_dbproc, 7))
                    dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,7),
                                SQLFLT8,
                                (BYTE *)&m_txn.OrderStatus.c_balance, 8);
                if(pData=dbdata(m_dbproc, 8))
                    m_txn.OrderStatus.o_id =
*(DBINT *) pData);

                DiscardNextRows(0);
                DiscardNextResults(0);

                if (m_txn.OrderStatus.o_ol_cnt == 0)
                    throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
                else if (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
                    throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
                else
                    m_txn.OrderStatus.exec_status_code = eOK;

                return;
            }
            catch (CSQLERR *e)
            {
                if ((e->m_msgno == 1205 ||
e->m_msgno ==
iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)) &&
                {
                    if (e->m_msgtext,
                    (++iTryCount <= iMaxRetries))
                    {
                        // hit deadlock; backoff for
                        delete e;
                        Sleep(10 * iTryCount);
                    }
                    else
                        throw;
                }
            }
            // while (TRUE)
        }

        // if (iTryCount)
        // throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
    }

void CTPCC_DBLIB::Delivery()
{
    int i;
    int iTryCount = 0;
    const BYTE *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_delivery", 0);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
-1, -1, (BYTE *)&m_txn.Delivery.w_id);

```

```

            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.Delivery.o_carrier_id);

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc) != 10)
                ThrowError(CDBLIBERR::eWrongNumCols);

            for (i=0; i<10; i++)
            {
                if (pData = dbdata(m_dbproc, i+1))
                    m_txn.Delivery.o_id[i]
= *((DBINT *)pData);
            }

            DiscardNextRows(0);
            DiscardNextResults(0);

            m_txn.Delivery.exec_status_code = eOK;
            return;
        }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno == 1205 ||
e->m_msgno ==
iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)) &&
            {
                if (e->m_msgtext,
                (++iTryCount <= iMaxRetries))
                {
                    // hit deadlock; backoff for
                    delete e;
                    Sleep(10 * iTryCount);
                }
                else
                    throw;
            }
        }
        // while (TRUE)
    }

    // if (iTryCount)
    // throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;

```

```

        m_SqlErr = (CSQLERR*)NULL;
    }
    return;
}

tpcc_dblib.h

/* FILE:          TPCC_DBLIB.H
 *                Microsoft TPC-C Kit Ver.
4.20.000
 *                Copyright Microsoft, 1999
 *                All Rights Reserved
 *
 *                Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 * PURPOSE:       Header file for TPC-C txn class
implementation.
 *
 * Change history:
 *                4.20.000 - updated rev number to match kit
 */
#pragma once

#ifndef PDBPROCESS
#define DBPROCESS void // dbprocess structure type
typedef DBPROCESS * PDBPROCESS;
#endif

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CSQLERR : public CBaseErr
{
public:

    CSQLERR(void)
    {
        m_msgno = 0;
        m_msgstate = 0;
        m_severity = 0;
        m_msgtext = NULL;
    };

    ~CSQLERR()
    {
        delete [] m_msgtext;
    };

    int          m_msgno;
    int          m_msgstate;
    int          m_severity;
    char *m_msgtext;

    int ErrorType() {return ERR_TYPE_SQL;};
    int ErrorNum() {return m_msgno;};
    char *ErrorText() {return m_msgtext;};
};

class CDBLIBERR : public CBaseErr
{
public:
    enum ACTION

```

```

    {
        eNone,
        eUnknown,
        eLogin, //
        error from dblogin
        eDbOpen, // error from
        dbopen
        eDbUse, //
        error from dbuse
        eDbSqlExec, //
        error from dbsqlexec
        eDbSet, //
        error from one of the dbset* routines
        eDbNextRow, //
        error from dbnextrow
        eWrongRowCount, // more or
        less rows returned than expected
        eWrongNumCols, // more or
        less columns returned than expected
        eDbResults, //
        error from dbresults
        eDbRpcExec, //
        error from dbrpcexec
        eDbSetMaxProcs, // error from
        dbsetmaxprocs
        eDbProcHandler // error from
        either dbprocerrhandle or dbprocmshandle
    };

    CDBLIBERR(ACTION eAction, int severity = 0, int
    dberror = 0, int oserr = 0)
    {
        m_eAction = eAction;
        m_severity = severity;
        m_dberror = dberror;
        m_oserr = oserr;

        m_dberrstr = NULL;
        m_oserrstr = NULL;
    };

    ~CDBLIBERR()
    {
        delete [] m_dberrstr;
        delete [] m_oserrstr;
    };

    ACTION m_eAction;
    int m_severity;
    int m_dberror;
    int m_oserr;
    char *m_dberrstr;
    char *m_oserrstr;

    int ErrorType() {return ERR_TYPE_DBLIB;};
    int ErrorNum() {return m_dberror;};
    char *ErrorText() {return m_dberrstr;};
};

class CTPCC_DBLIB_ERR : public CBaseErr
{
public:
    enum CTPCC_DBLIB_ERRS
    {
        ERR_WRONG_SP_VERSION = 1, //
        "Wrong version of stored procs on database server"
    };
};

```

```

ERR_INVALID_CUST,
// "Invalid Customer id,name."
ERR_NO_SUCH_ORDER,
// "No orders found for customer."
ERR_RETRIED_TRANS,
// "Retries before transaction succeeded."
};

CTPCC_DBLIB_ERR( int iErr ) { m_erno = iErr;
m_iTryCount = 0; };

CTPCC_DBLIB_ERR( int iErr, int iTryCount ) {
m_erno = iErr; m_iTryCount = iTryCount; };

int m_erno;
int m_iTryCount;

int ErrorType() {return ERR_TYPE_TPCC_DBLIB;};
int ErrorNum() {return m_erno;};

char *ErrorText();
};

class DllDecl CTPCC_DBLIB : public CTPCC_BASE
{
private:
// declare variables and private functions here...
PDBPROCESS m_dbproc;
CDBLIBERR *m_DbLibErr;
not allocated until needed (maybe never)
CSQLERR *m_SqlErr;
// not allocated until needed (maybe never)
int m_MaxRetries;
// retry count on deadlock

void DiscardNextRows(int iExpectedCount);
void DiscardNextResults(int iExpectedCount);
void ThrowError( CDBLIBERR::ACTION eAction );
void ResetError();

union
{
NEW_ORDER_DATA
NewOrder;
PAYMENT_DATA Payment;
DELIVERY_DATA Delivery;
STOCK_LEVEL_DATA StockLevel;
ORDER_STATUS_DATA OrderStatus;
} m_txn;

public:
CTPCC_DBLIB(LPCSTR szServer, LPCSTR szUser,
LPCSTR szPassword, LPCSTR szHost, LPCSTR szDatabase );
~CTPCC_DBLIB(void);

inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return &m_txn.NewOrder; };
inline PPAYMENT_DATA
BuffAddr_Payment() { return &m_txn.Payment; };
inline PDELIVERY_DATA
BuffAddr_Delivery() { return &m_txn.Delivery; };
inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
{ return &m_txn.StockLevel; };
inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return &m_txn.OrderStatus; };

void NewOrder ();
void Payment ();

```

```

void Delivery ();
void StockLevel ();
void OrderStatus ();

// these are public because they must be called from the
dblib err_handler and msg_handler
// outside of the class
void SetDbLibError(int severity, int dberr, int oserr,
LPCSTR dberrstr, LPCSTR oserrstr);
void SetSqlError( int msgno, int msgstate, int severity,
LPCSTR msgtext );
};

extern "C" DllDecl CTPCC_DBLIB* CTPCC_DBLIB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword,
LPCSTR szHost, LPCSTR szDatabase );

typedef CTPCC_DBLIB* (TYPE_CTPCC_DBLIB)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR);

```

### tpcc\_enc.cpp

```

// tpcc_enc.cpp: implementation of the CTPCC_ENCINA class.
//
////////////////////////////////////////////////////////////////////
#include <windows.h>
#include <process.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h" //tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_enc.h"
#include "..\include\tpcc_type.h"
#include "mon_client.h"
#include "client_utils.h"

static CRITICAL_SECTION TpCriticalSection;
extern "C" char *errFile;

BOOL WINAPI DllMain(HANDLE hModule, DWORD ul_reason_for_call,
LPVOID lpReserved)
{
switch( ul_reason_for_call )
{
case DLL_PROCESS_ATTACH:

```

```

        DisableThreadLibraryCalls(hModule);
        InitializeCriticalSection(&TpCriticalSection);
        break;

    case DLL_PROCESS_DETACH:
        DeleteCriticalSection(&TpCriticalSection);
        break;

    default:
        /* nothing */;
    }
    return TRUE;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ENCINA* CTPCC_ENCINA_new()
{
    return new CTPCC_ENCINA();
}

// wrapper routine for enroll_client
__declspec(dllexport) CTPCC_ENCINA* CTPCC_ENCINA_post_init()
{
    enroll_client();
    return NULL;
}

// constructor and destructor
CTPCC_ENCINA::CTPCC_ENCINA()
{
    // Add initialization of ENCINA Structures if any
    m_txn = (ENC_DATA *)malloc(sizeof(ENC_DATA));
    if (m_txn == NULL)
        throw new CENCERR(ERR_TYPE_MEMORY,
ERR_FATAL_LEVEL);
}

CTPCC_ENCINA::~CTPCC_ENCINA()
{
    // free the data structure allocated with tmalloc
    free((char *)m_txn);
}

void CTPCC_ENCINA::NewOrder()
{
    // question: if we need to prepare the data?
    if (send_new_order(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_ENCINA::Payment()
{
    if (send_payment(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_ENCINA::Delivery()

```

```

{
    // Note: Delivery txn code in the tuxedo server does not implement
logging of the delivery
    // txn results, so cannot be used as is to run an auditable TPC-C
result. For that
    // reason, delivery txns should not be done via Tuxedo.
    // The code is included for completeness.
    //m_txn->u.Delivery.exec_status_code = eDeliveryFailed;
    //return;

    // Note: If we use the delivery thread in tpcc.dll, it is not possible to
get to this
    // point for delivery txns. But if we use Encina delivery server,
the code is
    // needed. It is suggested using the delivery thread in tpcc.dll
since it is
    // convenient and provides best performance.
    GetLocalTime(&m_txn->u.Delivery.queue_time);

    if (send_delivery(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        m_txn->u.Delivery.exec_status_code = eDeliveryFailed;
    else
        m_txn->u.Delivery.exec_status_code = eOK;
}

void CTPCC_ENCINA::StockLevel()
{
    if (send_stock_level(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_ENCINA::OrderStatus()
{
    if (send_order_status(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn->ErrorType, m_txn->error
);
}

char *CENCERR::ErrorText()
{
    if (m_iErrorType == TRPC_ERROR)
    {
        sprintf( m_szErrorText, "Error: ENCINA TRPC error
(see log file %s for details)", errFile);
    }
    else
        sprintf( m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
    return m_szErrorText;
};

tpcc_enc.h
/* FILE: TPCC_ENCINA.H

```

```

*                               Microsoft TPC-C Kit Ver.
4.10.000
*                               not yet audited
*
*   PURPOSE:                     Header file for TPC-C Encina class
implementation.
*                               Copyright Microsoft, 1999
*   All Rights Reserved
*/

#ifndef _TPCC_ENCINA_H_
#define _TPCC_ENCINA_H_

#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CTPCC_ENCINA : public CTPCC_BASE
{
private:
    struct ENC_DATA
    {
        int
        ErrorType;
        int
        error;
        union
        {
            NEW_ORDER_DATA
            PAYMENT_DATA
            DELIVERY_DATA
            STOCK_LEVEL_DATA
            ORDER_STATUS_DATA
        } u;
        *m_txn;
    };

public:
    CTPCC_ENCINA();
    virtual ~CTPCC_ENCINA();

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return &m_txn->u.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return &m_txn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return &m_txn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
    { return &m_txn->u.StockLevel; };
    inline PORORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return &m_txn->u.OrderStatus; };

    void NewOrder      ();
    void Payment       ();
    void Delivery      ();
    void StockLevel    ();

```

```

};

void OrderStatus      ();

class CENCERR : public CBaseErr
{
private:
    char    m_szErrorText[64];
public:
    int     m_erno; //
    int     m_iErrorType; // match
    ErrorType in CTPCC_ENCINA
    int     m_iError; // machine
    error in CTPCC_ENCINA

    // use this interface for genuine Encina errors
    CENCERR( int iErr )
    {
        m_erno = iErr; // ENCINA error
        m_iErrorType = ERR_TYPE_ENCINA;
        m_iError = 0; // only meaningful if
    }

m_erno == TPEOS
};

// use this interface to impersonate a non-Encina error
type
CENCERR( int iErrorType, int iError )
{
    m_iErrorType = iErrorType;
    m_iError = iError;
    m_erno = iError; // ???
}

// A CENCERR class can impersonate another class,
which happens if the error
// was not actually a Tuxedo error, but was simply
transmitted back via Tuxedo.
int ErrorType()
{
    return m_iErrorType;
}

int ErrorNum() {return m_erno;};
char *ErrorText();
};

// wrapper routine for class constructor:
extern "C" __declspec(dllexport) CTPCC_ENCINA* CTPCC_ENCINA_new();
extern "C" __declspec(dllexport) CTPCC_ENCINA*
CTPCC_ENCINA_post_init();

typedef CTPCC_ENCINA* (TYPE_CTPCC_ENCINA)();

#endif // !defined(_TPCC_ENCINA_H_)

tpcc_odbc.cpp

/*   FILE:                     TPCC_ODBC.CPP
*                               Microsoft TPC-C Kit Ver.
4.20.000
*                               Copyright Microsoft, 1999
*   All Rights Reserved
*
*                               Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*/

```



```

*      PURPOSE:      Implements ODBC calls for TPC-C txns.
*      Contact:    Charles Levine (clevine@microsoft.com)
*
* Change history:
*      4.20.000 - updated rev number to match kit
*      4.10.001 - not deleting error class in catch handler on
deadlock retry;
*
memory leak
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>
#include <odbss.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from tpcc_version stored proc
const char sVersion[] = "4.10.000";

const iMaxRetries = 10;          // how many retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV;
// ODBC environment handle

BOOL WINAPI DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch(ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv)
!= SQL_SUCCESS )
                return FALSE;
                break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)
                SQLFreeEnv(henv);
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

```

```

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
*/
char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name."
},
        { ERR_NO_SUCH_ORDER,
"No orders
found for customer."
},
        { ERR_RETRIED_TRANS,
"Retries
before transaction succeeded."
},
        { 0,
}
    };

    static char szNotFound[] = "Unknown error number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno == errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer,          // name of SQL server
LPCSTR szUser,           // user name for login
LPCSTR szPassword,       // password for login
LPCSTR szHost,           // not used
LPCSTR szDatabase )      // name of database to use
{
    return new CTPCC_ODBC( szServer, szUser, szPassword, szHost,
szDatabase );
}

CTPCC_ODBC::CTPCC_ODBC (
LPCSTR szServer,          // name of
SQL server
LPCSTR szUser,           //
user name for login
LPCSTR szPassword,       // password
for login
LPCSTR szHost,           //
not used
LPCSTR szDatabase        // name of
database to use
)
{
    RETCODE rc;

    // initialization
    m_hdbc = SQL_NULL_HDBC;
}

```

```

m_hstmt = SQL_NULL_HSTMT;

m_hstmtNewOrder = SQL_NULL_HSTMT;
m_hstmtPayment = SQL_NULL_HSTMT;
m_hstmtDelivery = SQL_NULL_HSTMT;
m_hstmtOrderStatus = SQL_NULL_HSTMT;
m_hstmtStockLevel = SQL_NULL_HSTMT;

m_descNewOrderCols1 = SQL_NULL_HDESC;
m_descNewOrderCols2 = SQL_NULL_HDESC;
m_descOrderStatusCols1 = SQL_NULL_HDESC;
m_descOrderStatusCols2 = SQL_NULL_HDESC;

if ( SQLAllocHandle(SQL_HANDLE_DBC, henv, &m_hdbc) !=
SQL_SUCCESS )
    ThrowError(CODBCERR::eAllocHandle);

if ( SQLSetConnectOption(m_hdbc, SQL_PACKET_SIZE, 4096) !=
SQL_SUCCESS )
    ThrowError(CODBCERR::eConnOption);

{
    char                szConnectStr[256];
    char                szOutStr[1024];
    SQLSMALLINT        iOutStrLen;

    sprintf( szConnectStr, "DRIVER=SQL
Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
            szServer, szUser, szPassword, szDatabase );

    rc = SQLDriverConnect(m_hdbc, NULL,
(SQLCHAR*)szConnectStr, sizeof(szConnectStr),
            (SQLCHAR*)szOutStr, sizeof(szOutStr),
            &iOutStrLen, SQL_DRIVER_NOPROMPT );

    if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
        ThrowError(CODBCERR::eConnect);
}

if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmt)
!= SQL_SUCCESS)
    ThrowError(CODBCERR::eAllocHandle);

{
    char                buffer[128];

    // set some options affecting connection behavior
strcpy(buffer, "set nocount on set XACT_ABORT ON");
    rc = SQLExecDirect(m_hstmt, (unsigned char *)buffer,
SQL_NTS);

    if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
        ThrowError(CODBCERR::eExecDirect);

    // verify that version of stored procs on server is correct
char db_sp_version[10];
strcpy(buffer, "{call tpcc_version}");
    rc = SQLExecDirect(m_hstmt, (unsigned char *)buffer,
SQL_NTS);

    if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
        ThrowError(CODBCERR::eExecDirect);
    if ( SQLBindCol(m_hstmt, 1, SQL_C_CHAR,
&db_sp_version, sizeof(db_sp_version), NULL) != SQL_SUCCESS )
        ThrowError(CODBCERR::eBindCol);
    if ( SQLFetch(m_hstmt) == SQL_ERROR )

```

```

        ThrowError(CODBCERR::eFetch);
        if (strcmp(db_sp_version,sVersion)
            throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION );

        SQLFreeHandle(SQL_HANDLE_STMT, m_hstmt);
    }

    // Bind parameters for each of the transactions
    InitNewOrderParams();
    InitPaymentParams();
    InitOrderStatusParams();
    InitDeliveryParams();
    InitStockLevelParams();
}

CTPCC_ODBC::~CTPCC_ODBC( void )
{
    // note: descriptors are automatically released when the connection is
dropped
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtNewOrder);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtPayment);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtDelivery);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtOrderStatus);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtStockLevel);

    SQLDisconnect(m_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);
}

void CTPCC_ODBC::ThrowError( CODBCERR::ACTION eAction )
{
    RETCODE            rc;
    SDWORD             INativeError;
    char               szState[6];
    char               szMsg[SQL_MAX_MESSAGE_LENGTH];
    char
szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    CODBCERR          *pODBCErr;           // not
allocated until needed (maybe never)

    pODBCErr = new CODBCERR();

    pODBCErr->m_NativeError = 0;
    pODBCErr->m_eAction = eAction;
    pODBCErr->m_bDeadLock = FALSE;

    szTmp[0] = 0;
    while (TRUE)
    {
        rc = SQLError(henv, m_hdbc, m_hstmt, (BYTE
*)&szState, &INativeError,
            (BYTE *)&szMsg,
sizeof(szMsg), NULL);
        if (rc == SQL_NO_DATA)
            break;

        // check for deadlock
        if (INativeError == 1205 || (INativeError ==
iErrOleDbProvider &&
            strstr(szMsg, sErrTimeoutExpired) != NULL))
            pODBCErr->m_bDeadLock = TRUE;

        // capture the (first) database error
        if (pODBCErr->m_NativeError == 0 && INativeError !=
0)
            pODBCErr->m_NativeError = INativeError;

```

```

// quit if there isn't enough room to concatenate error text
if ( ( strlen(szMsg) + 2 ) > ( sizeof(szTmp) - strlen(szTmp))
)
    break;

// include line break after first error msg
if (szTmp[0] != 0)
    strcat( szTmp, "\n");
strcat( szTmp, szMsg );
}

if (pODBCErr->m_odbcerrstr != NULL)
{
    delete [] pODBCErr->m_odbcerrstr;
    pODBCErr->m_odbcerrstr = NULL;
}

if (strlen(szTmp) > 0)
{
    pODBCErr->m_odbcerrstr = new char[ strlen(szTmp)+1
];
    strcpy( pODBCErr->m_odbcerrstr, szTmp );
}

SQLFreeStmt(m_hstmt, SQL_CLOSE);
throw pODBCErr;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.StockLevel.w_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS )
        ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE          rc;
    int              iTryCount = 0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {
            rc = SQExecDirectW(m_hstmt,
(SQLWCHAR*)"L" {call tpcc_stocklevel(?,?,?)}, SQL_NTS);

```

```

if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
    ThrowError(CODBCERR::eExecDirect);

if ( SQLFetch(m_hstmt) == SQL_ERROR )
    ThrowError(CODBCERR::eFetch);

SQLFreeStmt(m_hstmt, SQL_CLOSE);

m_txn.StockLevel.exec_status_code = eOK;
break;
}
catch (CODBCERR *e)
{
    if (!(e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
        throw;

    // hit deadlock; backoff for increasingly longer
    // period
    delete e;
    Sleep(10 * iTryCount);
}
}

// if (iTryCount)
// throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtNewOrder) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols1) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols2) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.NewOrder.w_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);
}

```

```

        for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
        {
            if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) != SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);
        }

        // set the bind offset pointer
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_BindOffset,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.NewOrder.OL[0].ol_stock, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.OL[0].ol_i_price, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.OL[0].ol_amount, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the second result set
        if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.w_tax, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.d_tax, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.c_last, sizeof(m_txn.NewOrder.c_last), NULL) !=
SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.c_discount, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.c_credit, sizeof(m_txn.NewOrder.c_credit), NULL) !=
SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0, NULL) !=
SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_no_commit_flag, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);
    }

void CTPCC_ODBC::NewOrder()

```

```

    {
        int i;
        RETCODE rc;
        int iTryCount =
0;

        // 0 1 2
        // 012345678901234567890123456789
        wchar_t szSqlTemplate[] =
L"{call tpcc_neworder(?,?,?,?,"
L"?,?,?,?,?,?,?,?,?,?,?,?,?,"
L"?,?,?,?,?,?,?,?,?,?,?,?,?,"
L"?,?,?,?,?,?,?,?,?,?,?,?,?)}";

        m_hstmt = m_hstmtNewOrder;

        // associate the parameter and column bindings for this transaction
        if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        // clip statement buffer based on number of parameters
        // fixed part is 29 chars and variable part is 6 chars per line item
        i = 29 + m_txn.NewOrder.o_ol_cnt*6;
        wcsncpy( &szSqlTemplate[i], L"");

        // check whether any order lines are for a remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
        {
            if (m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {
                m_txn.NewOrder.o_all_local = 0; // at least
                one remote warehouse
                break;
            }
        }

        while (TRUE)
        {
            try
            {
                m_BindOffset = 0;
                rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)szSqlTemplate, SQL_NTS);
                if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
                    ThrowError(CODBCERR::eExecDirect);

                // Get order line results
                m_txn.NewOrder.total_amount = 0;
                for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
                {
                    // set the bind offset value...
                    m_BindOffset = i *
sizeof(m_txn.NewOrder.OL[0]);

                    if ( SQLFetch(m_hstmt) ==
SQL_ERROR)
                        ThrowError(CODBCERR::eFetch);
                }
            }
        }
    }

```

```

// move to the next resultset
if ( SQLMoreResults(m_hstmt) ==
SQL_ERROR )
ThrowError(CODBCERR::eMoreResults);
m_txn.NewOrder.OL[i].ol_amount;
}
// associate the column bindings for the
second result set
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2, SQL_IS_POINTER
) != SQL_SUCCESS )
ThrowError(CODBCERR::eSetStmtAttr);
if ( SQLFetch(m_hstmt) == SQL_ERROR )
ThrowError(CODBCERR::eFetch);
SQLFreeStmt(m_hstmt, SQL_CLOSE);
if (m_no_commit_flag == 1)
{
m_txn.NewOrder.total_amount +=
((1 + m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));
m_txn.NewOrder.exec_status_code = eOK;
}
else
m_txn.NewOrder.exec_status_code = eInvalidItem;
break;
}
catch (CODBCERR *e)
{
if ((!e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
throw;
// hit deadlock; backoff for increasingly longer
period
delete e;
Sleep(10 * iTryCount);
}
}
// if (iTryCount)
// throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}
void CTPCC_ODBC::InitPaymentParams()
{
if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtPayment) != SQL_SUCCESS )
ThrowError(CODBCERR::eAllocHandle);
m_hstmt = m_hstmtPayment;
int i = 0;
if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.Payment.w_id, 0, NULL)
!= SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
&m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.Payment.c_last), 0, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), NULL) != SQL_SUCCESS
)
ThrowError(CODBCERR::eBindParam);
i = 0;
if ( SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_street_1, sizeof(m_txn.Payment.w_street_1), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_street_2, sizeof(m_txn.Payment.w_street_2), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_city, sizeof(m_txn.Payment.w_city),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_state, sizeof(m_txn.Payment.w_state),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_zip, sizeof(m_txn.Payment.w_zip),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_street_1, sizeof(m_txn.Payment.d_street_1), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_street_2, sizeof(m_txn.Payment.d_street_2), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_city, sizeof(m_txn.Payment.d_city),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_state, sizeof(m_txn.Payment.d_state),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_zip, sizeof(m_txn.Payment.d_zip),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_first, sizeof(m_txn.Payment.c_first),
NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_middle, sizeof(m_txn.Payment.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_street_1, sizeof(m_txn.Payment.c_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_street_2, sizeof(m_txn.Payment.c_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_city, sizeof(m_txn.Payment.c_city),
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_state, sizeof(m_txn.Payment.c_state),
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_zip, sizeof(m_txn.Payment.c_zip),
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_phone, sizeof(m_txn.Payment.c_phone),
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_credit, sizeof(m_txn.Payment.c_credit), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_credit_lim, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_discount, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_balance, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_data, sizeof(m_txn.Payment.c_data),
NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::Payment()
{
    RETCODE          rc;
    int              iTryCount = 0;

    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)"L" {call tpcc_payment(?,?,?,?,?,?)}", SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);

            if (m_txn.Payment.c_id == 0)

```

```

                throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code
= eOK;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!(e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
                throw;

            // hit deadlock; backoff for increasingly longer
            period
                delete e;
                Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtOrderStatus) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.OrderStatus.w_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    // configure block cursor
    if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) != SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS

```

```

    )
    ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.OrderStatus.OL[0].ol_supply_w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.OrderStatus.OL[0].ol_i_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.OrderStatus.OL[0].ol_quantity, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.OrderStatus.OL[0].ol_amount, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.OL[0].ol_delivery_d, 0,
NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.OrderStatus.c_last, sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.OrderStatus.c_first, sizeof(m_txn.OrderStatus.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.OrderStatus.c_middle, sizeof(m_txn.OrderStatus.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.OrderStatus.o_carrier_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.OrderStatus.c_balance, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.OrderStatus.o_id, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::OrderStatus()
{
    int
iTryCount = 0;
    RETCODE
rc;

    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {

```

```

// configure block cursor
if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_ARRAY_SIZE, (SQLPOINTER)1, 0) != SQL_SUCCESS )
    ThrowError(CODBCERR::eSetStmtAttr);

    rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)"L"{call tpcc_orderstatus(?,?,?)}", SQL_NTS);
    if ( ((rc == SQL_SUCCESS_WITH_INFO)
&& (m_RowsFetched != 0)) || (rc == SQL_ERROR) )
        ThrowError(CODBCERR::eExecDirect);

// configure block cursor
if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OL_ORDER_STATUS_ITEMS, 0) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eSetStmtAttr);

    rc = SQLFetchScroll( m_hstmt,
SQL_FETCH_NEXT, 0 );
    if ( ((rc == SQL_SUCCESS_WITH_INFO)
&& (m_RowsFetched != 0)) || (rc == SQL_ERROR) )
        ThrowError(CODBCERR::eFetchScroll);

    m_txn.OrderStatus.o_ol_cnt =
(short)m_RowsFetched;

    if (m_txn.OrderStatus.o_ol_cnt != 0)
    {
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        if ( SQLMoreResults(m_hstmt) ==
SQL_ERROR )
            ThrowError(CODBCERR::eMoreResults);

        if ( (rc = SQLFetch(m_hstmt)) ==
SQL_ERROR )
            ThrowError(CODBCERR::eFetch);
    }

    SQLFreeStmt(m_hstmt, SQL_CLOSE);

    if (m_txn.OrderStatus.o_ol_cnt == 0)
        throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
    else if (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
        throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_INVALID_CUST );
    else
        m_txn.OrderStatus.exec_status_code = eOK;

        break;
    }
    catch (CODBCERR *e)
    {

```

```

        if ((!e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
            throw;

        // hit deadlock; backoff for increasingly longer
        period

        delete e;
        Sleep(10 * iTryCount);
    }

    //
    // if (iTryCount)
    //     throw new
    CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtDelivery) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtDelivery;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.Delivery.w_id, 0, NULL)
!= SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    for (i=0; i<10; i++)
    {
        if ( SQLBindCol(m_hstmt, (UWORD)(i+1),
SQL_C_SLONG, &m_txn.Delivery.o_id[i], 0, NULL) != SQL_SUCCESS )
            ThrowError(CODBCERR::eBindCol);
    }
}

void CTPCC_ODBC::Delivery()
{
    RETCODE          rc;
    int              iTryCount = 0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)L"{call tpcc_delivery(?,?)}", SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt) == SQL_ERROR )
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);
            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
    }
}

```

```

    }
    catch (CODBCERR *e)
    {
        if ((!e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
            throw;

        // hit deadlock; backoff for increasingly longer
        period

        delete e;
        Sleep(10 * iTryCount);
    }

    //
    // if (iTryCount)
    //     throw new
    CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

```

### tpcc\_odbc.h

```

/*      FILE:          TPCC_ODBC.H
 *
 *      Microsoft TPC-C Kit Ver.
4.20.000
 *
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *
 *      Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 *      PURPOSE:      Header file for TPC-C txn class
implementation.
 *
 *      Change history:
 *
 *          4.20.000 - updated rev number to match kit
 */
#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        error from SQLAllocConnect,
        eAllocHandle,
        SQLAllocHandle,
        eConnOption,
        SQLSetConnectOption,
        eConnect,
        SQLConnect,
        eAllocStmt,
        error from SQLAllocStmt,
        eExecDirect,
        SQLExecDirect,
        eBindParam,
        error from SQLBindParameter
    };
};

```



```

SQLBindCol          eBindCol,          // error from
error from SQLFetch eFetch,          //
SQLFetchScroll     eFetchScroll,      // error from
SQLMoreResults     eMoreResults,      // error from
SQLPrepare         ePrepare,          // error from
SQLExecute         eExecute,          // error from
SQLSetEnvAttr      eSetEnvAttr,       // error from
SQLSetStmtAttr     eSetStmtAttr       // error from
};
CODBCERR(void)
{
    m_eAction = eNone;
    m_NativeError = 0;
    m_bDeadLock = FALSE;
    m_odbcerrstr = NULL;
};
~CODBCERR()
{
    if(m_odbcerrstr != NULL)
        delete [] m_odbcerrstr;
};
ACTION m_eAction;
int m_NativeError;
BOOL m_bDeadLock;
char *m_odbcerrstr;

int ErrorType() {return ERR_TYPE_ODBC;};
int ErrorNum() {return m_NativeError;};
char *ErrorText() {return m_odbcerrstr;};

};

class CTPCC_ODBC_ERR : public CBaseErr
{
public:
    enum TPCC_ODBC_ERRS
    {
        ERR_WRONG_SP_VERSION = 1, //
        "Wrong version of stored procs on database server"
        ERR_INVALID_CUST,
        // "Invalid Customer id,name."
        ERR_NO_SUCH_ORDER,
        // "No orders found for customer."
        ERR_RETRIED_TRANS,
        // "Retries before transaction succeeded."
    };

    CTPCC_ODBC_ERR( int iErr ) { m_erno = iErr;
m_iTryCount = 0; };

    CTPCC_ODBC_ERR( int iErr, int iTryCount ) {
m_erno = iErr; m_iTryCount = iTryCount; };

    int m_erno;
    int m_iTryCount;

    int ErrorType() {return ERR_TYPE_TPCC_ODBC;};
};

int ErrorNum() {return m_erno;};
char *ErrorText();
};

class DIIDecl CTPCC_ODBC : public CTPCC_BASE
{
private:
    // declare variables and private functions here...
    BOOL m_bDeadlock; //
    transaction was selected as deadlock victim
    int m_MaxRetries; // retry count on deadlock

    SQLHENV m_henv; // ODBC environment handle
    SQLHDBC m_hdbc;
    SQLHSTMT m_hstmt; // the current hstmt

    SQLHSTMT m_hstmtNewOrder;
    SQLHSTMT m_hstmtPayment;
    SQLHSTMT m_hstmtDelivery;
    SQLHSTMT m_hstmtOrderStatus;
    SQLHSTMT m_hstmtStockLevel;

    SQLHDESC m_descNewOrderCols1;
    SQLHDESC m_descNewOrderCols2;
    SQLHDESC m_descOrderStatusCols1;
    SQLHDESC m_descOrderStatusCols2;

    // new-order specific fields
    SQLUIINTEGER m_BindOffset;
    SQLUIINTEGER m_RowsFetched;
    int m_no_commit_flag;

    void ThrowError( CODBCERR::ACTION eAction );

    void InitNewOrderParams();
    void InitPaymentParams();
    void InitDeliveryParams();
    void InitStockLevelParams();
    void InitOrderStatusParams();

    union
    {
        NEW_ORDER_DATA
        NewOrder;
        PAYMENT_DATA Payment;
        DELIVERY_DATA Delivery;
        STOCK_LEVEL_DATA StockLevel;
        ORDER_STATUS_DATA OrderStatus;
    } m_txn;

public:
    CTPCC_ODBC(LPCSTR szServer, LPCSTR szUser,
LPCSTR szPassword, LPCSTR szHost, LPCSTR szDatabase);
~CTPCC_ODBC(void);

    inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return &m_txn.NewOrder; };
    inline PPAYMENT_DATA
BuffAddr_Payment() { return &m_txn.Payment; };
    inline PDELIVERY_DATA
BuffAddr_Delivery() { return &m_txn.Delivery; };
    inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
{ return &m_txn.StockLevel; };
};

```

```

        inline PORDER_STATUS_DATA
BuffAddr_OrderStatus()    { return &m_txn.OrderStatus; };

        void NewOrder          ();
        void Payment           ();
        void Delivery          ();
        void StockLevel        ();
        void OrderStatus       ();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
    ( LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword,
      LPCSTR szHost, LPCSTR szDatabase );

typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR);

tpcc_tux.cpp

/*      FILE:          TPCC_TUX.CPP
 *          Microsoft TPC-C Kit Ver.
4.20.000
 *          Copyright Microsoft, 1999
 *          All Rights Reserved
 *
 *          Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 *      PURPOSE:      Implementation for TPC-C Tuxedo class.
 *      Contact:     Charles Levine (clevine@microsoft.com)
 *
 *      Change history:
 *          4.20.000 - updated rev number to match kit
 */

#include <windows.h>
#include <process.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <tmenv.h>
#include <xa.h>
#include <atmi.h>

#ifdef ICECAP
// for IceCAP profiling
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h" //tpckit transaction
header contains definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"

```

```

#include "tpcc_tux.h" // interface
to Tuxedo libraries

static TPINIT          *tpinf;
static DWORD           TLSIsTpInitedKey;
static CRITICAL_SECTION TpCriticalSection;

BOOL WINAPIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);

            // create thread local storage to determine
            Tuxedo initialization per thread.
            // it really should be possible to do this in the
            DLL_THREAD_ATTACH call, but
            // Ed says he could not get it to work.
            // assumption: value init'd to 0
            TLSIsTpInitedKey = TlsAlloc();

            if ((tpinf = (TPINIT *)tpalloc("TPINIT",
            NULL, sizeof(TPINIT))) == NULL)
            {
                // int TpRc = tperrno;
                return FALSE;
            }
            tpinf->flags |= TPMULTICONTEXTS;

            InitializeCriticalSection(&TpCriticalSection);
            break;

        case DLL_PROCESS_DETACH:
            TlsFree(TLSIsTpInitedKey);
            DeleteCriticalSection(&TpCriticalSection);
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

static void ThrTpInit()
{
    static int num_tpinit=0;
    int iRc, TpRc;

    // has this thread been initialized? check thread local storage
    if(!TlsGetValue(TLSIsTpInitedKey))
    {
        EnterCriticalSection(&TpCriticalSection);
        itoa(++num_tpinit, tpinf->cltname, 10);

        iRc = tpinit(tpinf);
        TpRc = tperrno;
        LeaveCriticalSection(&TpCriticalSection);

        if (iRc < 0)
            throw new CTUXERR( tperrno );

        int value = 1;
        TlsSetValue(TLSIsTpInitedKey,&value);
    }
}

```

```

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_TUXEDO* CTPCC_TUXEDO_new()
{
    return new CTPCC_TUXEDO();
}

CTPCC_TUXEDO::CTPCC_TUXEDO()
{
    // Add initialization of Tuxedo Structures
    m_txn = (TUX_DATA *)tpalloc("CARRAY", NULL,
sizeof(TUX_DATA));
    if (m_txn == NULL)
        throw new CTUXERR( tperno );
}

CTPCC_TUXEDO::~~CTPCC_TUXEDO()
{
    // free the data structure allocated with tpalloc
    tpfree((char *)m_txn);
}

void CTPCC_TUXEDO::NewOrder()
{
    long    ilen, *olen;

    ThrTpInit();

    ilen = sizeof(TUX_DATA);
    olen = &ilen;

    if (tpcall("NEWORDER", (char *)m_txn, ilen, (char **)&m_txn,
(long *)olen, TPSIGRSTRT) == -1)
        throw new CTUXERR( tperno );

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CTUXERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_TUXEDO::Payment()
{
    long    ilen, *olen;

    ThrTpInit();

    ilen = sizeof(TUX_DATA);
    olen = &ilen;

    if (tpcall("PAYMENT", (char *)m_txn, ilen, (char **)&m_txn, (long
*)olen, TPSIGRSTRT) == -1)
        throw new CTUXERR( tperno );

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CTUXERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_TUXEDO::Delivery()
{
    int     iRc;
    long    ilen, *olen;

    // Note: Delivery txn code in the tuxedo server does not implement
logging of the delivery
    // txn results, so cannot be used as is to run an auditable TPC-C
result. For that
    // reason, delivery txns should not be done via tuxedo.

```

```

// The code is included for completeness.
m_txn->u.Delivery.exec_status_code = eDeliveryFailed;
return;

// normal path...

ThrTpInit();

GetLocalTime(&m_txn->u.Delivery.queue_time);

ilen = sizeof(TUX_DATA);
olen = &ilen;

if ((iRc = tpacall("DELIVERY", (char *)m_txn, ilen,
TPNOREPLY)) == -1)
{
    int TpRc = tperno;
    m_txn->u.Delivery.exec_status_code = eDeliveryFailed;
}
else
    m_txn->u.Delivery.exec_status_code = eOK;
}

void CTPCC_TUXEDO::StockLevel()
{
    long    ilen, *olen;

    ThrTpInit();

    ilen = sizeof(TUX_DATA);
    olen = &ilen;

    if (tpcall("STOCKLEVEL", (char *)m_txn, ilen, (char **)&m_txn,
(long *)olen, TPSIGRSTRT) == -1)
        throw new CTUXERR( tperno );

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CTUXERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_TUXEDO::OrderStatus()
{
    long    ilen, *olen;

    ThrTpInit();

    ilen = sizeof(TUX_DATA);
    olen = &ilen;

    if (tpcall("ORDERSTATUS", (char *)m_txn, ilen, (char **)&m_txn,
(long *)olen, TPSIGRSTRT) == -1)
        throw new CTUXERR( tperno );

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CTUXERR( m_txn->ErrorType, m_txn->error
);
}

char *CTUXERR::ErrorText()
{
    if (m_iErrorType == 0)
    {
        if (m_erno == TPEOS)
            sprintf( m_szErrorText, "Error: TUXEDO
error # %d, OS error # %d", m_erno, m_iError );
        else

```

```

        sprintf( m_szErrorText, "Error: TUXEDO
error # %d", m_erno );
    }
    else
        sprintf( m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
    return m_szErrorText;
};

```

## tpcc\_tux.h

```

/*      FILE:          TPCC_TUX.H
*          Microsoft TPC-C Kit Ver.
4.20.000
*          Copyright Microsoft, 1999
*          All Rights Reserved
*
*          Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
*      PURPOSE:      Header file for TPC-C Tuxedo class
implementation.
*
*      Change history:
*          4.20.000 - updated rev number to match kit
*/

#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_TUXEDO : public CTPCC_BASE
{
private:
    struct TUX_DATA
    {
        int
ErrorType;
        int
error;
        union
        {
            NEW_ORDER_DATA
NewOrder;
            PAYMENT_DATA
Payment;
            DELIVERY_DATA
Delivery;
            STOCK_LEVEL_DATA
StockLevel;
            ORDER_STATUS_DATA
OrderStatus;
        } u;
        *m_txn;
    };

public:
    CTPCC_TUXEDO();
    ~CTPCC_TUXEDO(void);

    inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return &m_txn->u.NewOrder;
};

```

```

    inline PPAYMENT_DATA
BuffAddr_Payment() { return &m_txn->u.Payment; };
    inline PDELIVERY_DATA
BuffAddr_Delivery() { return &m_txn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
{ return &m_txn->u.StockLevel; };
    inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return &m_txn->u.OrderStatus; };

    void NewOrder      ();
    void Payment       ();
    void Delivery      ();
    void StockLevel    ();
    void OrderStatus   ();
};

class CTUXERR : public CBaseErr
{
private:
    // TODO: should use the sz_Msg field of the base class
instead
    char m_szErrorText[64];

public:
    // use this interface for genuine Tuxedo errors
CTUXERR( int iErr )
    {
        m_erno = iErr;
        m_iErrorType = 0;
        m_iError = GetLastError(); // only
meaningful if m_erno == TPEOS
    };

    // use this interface to impersonate a non-Tuxedo error
type
CTUXERR( int iErrorType, int iError )
    {
        m_iErrorType = iErrorType;
        m_iError = iError;
        m_erno = 0;
    }

    int m_erno;
    int m_iErrorType;
    int m_iError;

    // A CTUXERR class can impersonate another class,
which happens if the error
// was not actually a Tuxedo error, but was simply
transmitted back via Tuxedo.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return ERR_TYPE_TUXEDO;
        else
            return m_iErrorType;
    }

    int ErrorNum() {return m_erno;};
    char *ErrorText();
};

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_TUXEDO*
CTPCC_TUXEDO_new();

```

```
typedef CTPCC_TUXEDO* (TYPE_CTPCC_TUXEDO)();
```

## trans.h

```

/*      FILE:          TRANS.H
 *
 *      Microsoft TPC-C Kit Ver.
4.20.000
 *
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *
 *      Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 *      PURPOSE:       Header file for TPC-C structure templates.
 *
 *      Change history:
 *      4.20.000 - updated rev number to match kit
 */
#pragma once

// String length constants
#define SERVER_NAME_LEN      20
#define DATABASE_NAME_LEN   20
#define USER_NAME_LEN       20
#define PASSWORD_LEN        20
#define TABLE_NAME_LEN     20
#define I_DATA_LEN          50
#define I_NAME_LEN          24
#define BRAND_LEN           1
#define LAST_NAME_LEN       16
#define W_NAME_LEN          10
#define ADDRESS_LEN         20
#define STATE_LEN           2
#define ZIP_LEN              9
#define S_DIST_LEN          24
#define S_DATA_LEN          50
#define D_NAME_LEN          10
#define FIRST_NAME_LEN      16
#define MIDDLE_NAME_LEN     2
#define PHONE_LEN           16
#define DATETIME_LEN        30
#define CREDIT_LEN          2
#define C_DATA_LEN          250
#define H_DATA_LEN          24
#define DIST_INFO_LEN       24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN          25
#define OL_DIST_INFO_LEN    24

// TIMESTAMP_STRUCT is provided by the ODBC header file sqltypes.h, but
// is not available
// when compiling with dblink, so redefined here. Note: we are using the symbol
// "_SQLTYPES"
// (declared in sqltypes.h) as a way to determine if TIMESTAMP_STRUCT has
// been declared.
#ifdef __SQLTYPES
typedef struct
{
    short
SQLSMALLINT */ year;
    unsigned short
    /* SQLUSMALLINT
 */ month;
    unsigned short
    /* SQLUSMALLINT
 */ day;

```

```

    unsigned short
    /* SQLUSMALLINT
 */ hour;
    unsigned short
    /* SQLUSMALLINT
 */ minute;
    unsigned short
    /* SQLUSMALLINT
 */ second;
    unsigned long
    /* SQLINTEGER */
fraction;
} TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after transaction completes
enum EXEC_STATUS
{
    eOK, // 0 "Transaction
committed."
    eInvalidItem, // 1 "Item number is not valid."
    eDeliveryFailed // 2 "Delivery Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    short ol_supply_w_id;
    long ol_i_id;
    short ol_quantity;

    // output params
    char ol_i_name[I_NAME_LEN+1];
    char ol_brand_generic[BRAND_LEN+1];
    double ol_i_price;
    double ol_amount;
    short ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    short w_id;
    short d_id;
    long c_id;
    short o_ol_cnt;

    // output params
    EXEC_STATUS exec_status_code;
    char c_last[LAST_NAME_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_discount;
    double w_tax;
    double d_tax;
    long o_id;
    short o_commit_flag;
    TIMESTAMP_STRUCT o_entry_d;
    short o_all_local;
    double total_amount;
    OL_NEW_ORDER_DATA
OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    short w_id;
    short d_id;
    long c_id;
    short c_d_id;

```

```

short                c_w_id;
double              h_amount;
char                c_last[LAST_NAME_LEN+1];

// output params
EXEC_STATUS          exec_status_code;
TIMESTAMP_STRUCT    h_date;
char                 w_street_1[ADDRESS_LEN+1];
char                 w_street_2[ADDRESS_LEN+1];
char                 w_city[ADDRESS_LEN+1];
char                 w_state[STATE_LEN+1];
char                 w_zip[ZIP_LEN+1];
char                 d_street_1[ADDRESS_LEN+1];
char                 d_street_2[ADDRESS_LEN+1];
char                 d_city[ADDRESS_LEN+1];
char                 d_state[STATE_LEN+1];
char                 d_zip[ZIP_LEN+1];
char                 c_first[FIRST_NAME_LEN+1];
char                 c_middle[MIDDLE_NAME_LEN
+ 1];
char                 c_street_1[ADDRESS_LEN+1];
char                 c_street_2[ADDRESS_LEN+1];
char                 c_city[ADDRESS_LEN+1];
char                 c_state[STATE_LEN+1];
char                 c_zip[ZIP_LEN+1];
char                 c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT    c_since;
char                 c_credit[CREDIT_LEN+1];
double              c_credit_lim;
double              c_discount;
double              c_balance;
char                 c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long                ol_i_id;
    short               ol_supply_w_id;
    short               ol_quantity;
    double              ol_amount;
    TIMESTAMP_STRUCT    ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    // input params
    short               w_id;
    short               d_id;
    long                c_id;
    char                c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS          exec_status_code;
    char                 c_first[FIRST_NAME_LEN+1];
    char                 c_middle[MIDDLE_NAME_LEN+1];
    double              c_balance;
    long                o_id;
    TIMESTAMP_STRUCT    o_entry_d;
    short               o_carrier_id;
    OL_ORDER_STATUS_DATA
OL[MAX_OL_ORDER_STATUS_ITEMS];
    short               o_ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    short               w_id;
    short               o_carrier_id;

```

```

// output params
EXEC_STATUS          exec_status_code;
SYSTEMTIME           queue_time;
long                 o_id[10];
//
id's of delivered orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery transactions and for writing them to
the delivery server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME          queue; //time
    delivery transaction queued
    short               w_id; //delivery
    warehouse
    short               o_carrier_id; //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    short               w_id;
    short               d_id;
    short               threshold;

    // output params
    EXEC_STATUS          exec_status_code;
    long                 low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

### tuxapp.cpp

```

/*      FILE:          TUXAPP.CPP
 *
 *      Microsoft TPC-C Kit Ver.
4.20.000
 *
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *
 *      Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 *      PURPOSE:      Implementation for TPC-C Tuxedo server.
 *      Contact:     Charles Levine (clevine@microsoft.com)
 *
 *      Change history:
 *
 *      4.20.000 - updated rev number to match kit
 */

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <iostream.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include <tmenv.h>

```

```

#include <xa.h>
#include <atmi.h>

#include "..\..\common\src\trans.h" //tpckit transaction
header contains definations of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\db_dblib_dll\src\tpcc_dblib.h" // DBLIB
implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h" // ODBC
implementation of TPC-C txns
#include "tuxapp.h"

char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

// configuration settings from registry
TPCCREGISTRYDATA Reg;

CTPCC_BASE *pTxn = NULL;

#include "..\..\common\src\ReadRegistry.cpp"

/* FUNCTION: tpsvrinit ( int argc, char *argv[] )
 *
 * PURPOSE: Initialize the Server to Database connection.
 *
 * RETURNS: int 0 Success
 *          int -1 Failure
 */

int tpsvrinit ( int argc, char *argv[] )
{
    try
    {
        DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;
        GetComputerName(szMyComputerName, &dwSize);
        szMyComputerName[dwSize] = 0;

        if ( ReadTPCCRegistrySettings( &Reg ) )
            throw new CTUXAPP_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

        GetParameters(argc, argv);

        switch (Reg.eDB_Protocol)
        {
            case ODBC:
                pTxn = new CTPCC_ODBC(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword, szMyComputerName,
Reg.szDbName );
                break;
            case DBLIB:
                pTxn = new CTPCC_DBLIB(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword, szMyComputerName,
Reg.szDbName );
                break;
        }
    }
    catch (CBaseErr *e)
    {
        WriteMessageToEventLog(e->ErrorText());
        delete e;
    }
    catch (...)
    {

```

```

        WriteMessageToEventLog(TEXT("Unhandled
exception."));
    }
    return 0;
}

/* FUNCTION: tpsvrdone ( void )
 *
 */
void tpsvrdone ( void )
{
    delete pTxn;
    pTxn = NULL;
}

/* FUNCTION: BOOL GetParameters(int argc, char *argv[])
 *
 * PURPOSE: This function parses the command line passed in to the
delivery executable, initializing
and filling in global variable parameters.
 *
 * ARGUMENTS: int argc number of command
line arguments passed to delivery
char *argv[] array of
command line argument pointers
 */

static void GetParameters(int argc, char *argv[])
{
    // advance through args until "--" is found
    for(int j=0; j<argc; j++)
    {
        if (strcmp(argv[j], "--") == 0)
            break;
    }

    for(int i=j+1; i<argc; i++)
    {
        if ( argv[i][0] == '-' || argv[i][0] == '/' )
        {
            switch(argv[i][1])
            {
                case 'S':
                    strcpy(Reg.szDbServer,
argv[i+2]);
                    break;
                case 'D':
                    strcpy(Reg.szDbName,
argv[i+2]);
                    break;
                case 'P':
                    strcpy(Reg.szDbPassword, argv[i+2]);
                    break;
                case 'U':
                    strcpy(Reg.szDbUser,
argv[i+2]);
                    break;
                default:
                    cout << "Microsoft
TPC-C Kit" << endl;
                    cout << "Tuxedo
Server" << endl << endl;
                    cout << "Usage:" <<
endl;

```

```

        cout << " tuxapp
[<tuxedo-args>] -- -S<sql-server> [-D<database>] [-U<user>] [-P<password>]"
<< endl << endl;
        cout << "All parameters
default to values in registry." << endl;
        throw new
CTUXAPP_ERR( ERR_BAD_SYNTAX );
    }
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL, TEXT("TUXAPP.EXE"));

    _stprintf(szMsg, TEXT("Error in TUXAPP.EXE: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event source
            EVENTLOG_ERROR_TYPE, // event type
            0, // event category
            0, // event ID
            NULL, // current user's SID
            2, // strings in lpszStrings
            0, // no bytes of raw data
            (LPCTSTR *)lpszStrings, // array of error strings
            NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

void NEWORDER( TPSVCINFO *rqst )
{
    PNEW_ORDER_DATA pNewOrder;
    TUX_DATA *pData;
    const int iSize = sizeof(pData->u.NewOrder);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pNewOrder = pTxn->BuffAddr_NewOrder();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pNewOrder, &pData->u.NewOrder, iSize );

        pTxn->NewOrder();
        memcpy( &pData->u.NewOrder, pNewOrder, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.NewOrder, pNewOrder, iSize );
    }
}

// Note: Delivery txn code below does not implement logging of the delivery
// txn results, so cannot be used as is to run an auditable TPC-C result.
// The code is included for completeness.
void DELIVERY( TPSVCINFO *rqst )
{
    PDELIVERY_DATA pDelivery;
    TUX_DATA *pData;
    const int iSize = sizeof(pData->u.Delivery);

    try
    {
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception.));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.Payment, pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

void PAYMENT( TPSVCINFO *rqst )
{
    PPAYMENT_DATA pPayment;
    TUX_DATA *pData;
    const int iSize = sizeof(pData->u.Payment);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pPayment = pTxn->BuffAddr_Payment();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pPayment, &pData->u.Payment, iSize );

        pTxn->Payment();
        memcpy( &pData->u.Payment, pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.Payment, pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception.));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.Payment, pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

```



```

    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pDelivery = pTxn->BuffAddr_Delivery();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pDelivery, &pData->u.Delivery, iSize );

        pTxn->Delivery();

        memcpy( &pData->u.Delivery, pDelivery, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.Delivery, pDelivery, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception.));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.Delivery, pDelivery, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

void STOCKLEVEL( TPSVCINFO *rqst )
{
    PSTOCK_LEVEL_DATA    pStockLevel;
    TUX_DATA              *pData;
    const int             iSize =
sizeof(pData->u.StockLevel);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pStockLevel = pTxn->BuffAddr_StockLevel();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pStockLevel, &pData->u.StockLevel, iSize );

        pTxn->StockLevel();
        memcpy( &pData->u.StockLevel, pStockLevel, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.StockLevel, pStockLevel, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)

```

```

    {
        WriteMessageToEventLog(TEXT("Unhandled
exception.));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.StockLevel, pStockLevel, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

void ORDERSTATUS( TPSVCINFO *rqst )
{
    PORDER_STATUS_DATA    pOrderStatus;
    TUX_DATA              *pData;
    const int             iSize = sizeof(pData->u.OrderStatus);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pOrderStatus = pTxn->BuffAddr_OrderStatus();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pOrderStatus, &pData->u.OrderStatus, iSize );

        pTxn->OrderStatus();
        memcpy( &pData->u.OrderStatus, pOrderStatus, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.OrderStatus, pOrderStatus, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception.));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.OrderStatus, pOrderStatus, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

/* FUNCTION: CTUXAPP_ERR::ErrorText
 *
 */

char* CTUXAPP_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES, "Required
entries missing from registry." },
        { ERR_BAD_SYNTAX,
"Syntax error in input parameters."
},
    },

```

```

        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in registry." },
        { 0,
        ""
    };
};

static char szNotFound[] = "Unknown error number.";

for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_Error == errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

```

## tuxapp.h

```

/*      FILE:          TUXAPP.H
*
*          Microsoft TPC-C Kit Ver.
4.20.000
*
*          Copyright Microsoft, 1999
*
*          All Rights Reserved
*
*
*          Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
*      PURPOSE:      Header file for TPC-C Tuxedo server.
*
*      Change history:
*
*          4.20.000 - updated rev number to match kit
*/

```

```

enum TUXERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_BAD_SYNTAX,
    ERR_UNKNOWN_DB_PROTOCOL
};

class CTUXAPP_ERR : public CBaseErr
{
public:
    TUXERROR m_Error;

    CTUXAPP_ERR(TUXERROR Err) { m_Error =
Err; };

    ~CTUXAPP_ERR() {};

    int ErrorType() {return ERR_TYPE_TUXEDO;};
    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

struct TUX_DATA
{
    int          retval;
    int          error;

    union
    {
        NEW_ORDER_DATA          NewOrder;
        PAYMENT_DATA            Payment;
    }
};

```

```

        DELIVERY_DATA          Delivery;
        STOCK_LEVEL_DATA       StockLevel;
        ORDER_STATUS_DATA      OrderStatus;
    };
};

```

```

static void GetParameters(int argc, char *argv[]);
static void WriteMessageToEventLog(LPTSTR lpszMsg);

```

```

#ifdef __cplusplus
extern "C" {
#endif

void NEWORDER( TPSVCINFO *rqst );
void PAYMENT( TPSVCINFO *rqst );
void DELIVERY( TPSVCINFO *rqst );
void STOCKLEVEL( TPSVCINFO *rqst );
void ORDERSTATUS( TPSVCINFO *rqst );

```

```

#ifdef __cplusplus
}
#endif

```

## tuxmain.c

```

/*      FILE:          TUXMAIN.C
*
*          Microsoft TPC-C Kit Ver.
4.20.000
*
*          Copyright Microsoft, 1999
*
*          All Rights Reserved
*
*
*          Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
*      PURPOSE:      Implementation for TPC-C Tuxedo server.
*      Contact:      Charles Levine (clevine@microsoft.com)
*
*      Change history:
*
*          4.20.000 - updated rev number to match kit
*/

```

```

#include <stdio.h>
#include <xa.h>
#include <atmi.h>

#ifdef __cplusplus
extern "C" {
#endif

extern int_t mrunserver_(int);
extern void DELIVERY_(TPSVCINFO *);
extern void NEWORDER_(TPSVCINFO *);
extern void ORDERSTATUS_(TPSVCINFO *);
extern void PAYMENT_(TPSVCINFO *);
extern void STOCKLEVEL_(TPSVCINFO *);
#ifdef __cplusplus
}
#endif

static struct tmdspcttbl_t_tmdspcttbl[] = {
    { "DELIVERY", "DELIVERY", (void *)_(TPSVCINFO *)},
    DELIVERY, 0, 0 },
    { "NEWORDER", "NEWORDER", (void *)_(TPSVCINFO *)},
    NEWORDER, 1, 0 },
    { "ORDERSTATUS", "ORDERSTATUS", (void *)
_((TPSVCINFO *)) ORDERSTATUS, 2, 0 },
    { "PAYMENT", "PAYMENT", (void *)_(TPSVCINFO *)},
    PAYMENT, 3, 0 },
};

```

```

        { "STOCKLEVEL", "STOCKLEVEL", (void (*)_)((TPSVCINFO
*)) STOCKLEVEL, 4, 0 },
        { NULL, NULL, NULL, 0, 0 }
};

#ifdef _TMDLLIMPORT
#define _TMDLLIMPORT
#endif

_TMDLLIMPORT extern struct xa_switch_t tnull_switch;

struct tmsvrargs_t tmsvrargs = {
    NULL,
    &_tmdsptchtbl[0],
    0,
    tpsvrinit,
    tpsvrdone,
    _tmrunserver, /* PRIVATE */
    NULL, /* RESERVED */
    NULL, /* RESERVED */
    NULL, /* RESERVED */
    NULL /* RESERVED */
};

struct tmsvrargs_t *
#ifdef _TMPROTOTYPES
_tmgetsvrargs(void)
#else
_tmgetsvrargs()
#endif
{
    tmsvrargs.xa_switch = &tnull_switch;
    return(&tmsvrargs);
}

int
#ifdef _TMPROTOTYPES
main(int argc, char **argv)
#else
main(argc,argv)
int argc;
char **argv;
#endif
{
#ifdef TMMAINEXIT
#include "mainexit.h"
#endif

    return(_tmstartserver( argc, argv, _tmgetsvrargs()));
}

```

### txn\_base.h

```

/* FILE: TXN_BASE.H
* Microsoft TPC-C Kit Ver.
4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
*
* Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
* PURPOSE: Header file for TPC-C txn class
implementation.
*
* Change history:
* 4.20.000 - updated rev number to match kit

```

```

*/
#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
BuffAddr_OrderStatus() = 0;

    virtual void NewOrder() = 0;
    virtual void Payment() = 0;
    virtual void Delivery() = 0;
    virtual void StockLevel() = 0;
    virtual void OrderStatus() = 0;
};

```

### txnlog.h

```

/* FILE: TXNLOG.H
* Microsoft TPC-C Kit Ver.
4.10.000
*
* NOTE: this file is RTE specific
and should not be included
* in Full Disclosure Reports.
*
* Copyright Microsoft, 1999
*
* PURPOSE: Structure definitions for logging delivery txn
completion stats.
* Contact: Charles Levine (clevine@microsoft.com)
*/

```

```

typedef struct _TXN_NEWORDER
{
    BYTE OL_Count; //range 0 to 31
    BYTE OL_Remote_Count; //range 0 to 31
    WORD c_id;
    int o_id;
} TXN_NEWORDER;

typedef struct _TXN_PAYMENT
{
    BYTE CustByName;
    BYTE IsRemote;
} TXN_PAYMENT;

typedef struct _TXN_ORDERSTATUS

```

```

{
    BYTE    CustByName;
} TXN_ORDERSTATUS;

typedef union _TXN_DETAILS
{
    TXN_NEWORDER  NewOrder;
    TXN_PAYMENT   Payment;
    TXN_ORDERSTATUS  OrderStatus;
} TXN_DETAILS;

// Common header for all records in txn log. The TxnType field is
// a switch which identifies the particular variant.
#define TXN_REC_TYPE_CONTROL          1 //
// replaces TRANSACTION_TYPE_TPCC    2 //
#define TXN_REC_TYPE_TPCC             2 //
#define TXN_REC_TYPE_TPCC_DELIV_DEF  3 //

typedef struct _TXN_RECORD_HEADER
{
    JULIAN_TIME    TxnStartT0; //
start of txn
    BYTE    TxnType; // one of
TXN_REC_TYPE_*
    BYTE    TxnSubType; //
depends on TxnType
} TXN_RECORD_HEADER, *PTXN_RECORD_HEADER;

typedef struct _TXN_RECORD_CONTROL
{
    // common header; must exactly match
TXN_RECORD_HEADER
    JULIAN_TIME    TxnStartT0; //
start of txn
    BYTE    TxnType; // =
TXN_REC_TYPE_CONTROL
    BYTE    TxnSubType; //
depends on TxnType
// end of common header

    DWORD    Len; //
number of bytes after this field
} TXN_RECORD_CONTROL, *PTXN_RECORD_CONTROL;

// TPC-C Txn Record Layout:
//
//TxnStartT0' is a Julian timestamp corresponding to the moment the
//txn is sent to the SUT, i.e., beginning of response time. Deltas
//are in milliseconds. Note that if RTDelay > 0, then the txn was
//delayed by this amount. The delay occurs at the beginning of the
//response time. So if RTDelay > 0, then the txn was actually sent
//at TxnStartT0 + RTDelay.
//
//Graphically:
//
// time -->
//
// |--- Menu ---|-- Keying --|-- Response --|-- Think --|
// <- DeltaT1 -> <- DeltaT2 -> <- DeltaT4 -> <- DeltaT3 ->
//      ^
//      ^ TxnStartT0
//
//RTDelay is the amount of response time delay included in DeltaT4.
//RTDelay is recorded per txn because this value can be changed on
//the fly, and so may vary from txn to txn.
//
//TxnStatus is the txn completion code. It is used to indicate errors.
//For example, in the New Order txn, 1% of txns abort. TxnStatus will
//reflect this.

typedef struct _TXN_RECORD_TPCC
{
    // common header; must exactly match
TXN_RECORD_HEADER
    JULIAN_TIME    TxnStartT0; //
start of txn
    BYTE    TxnType; // =
TXN_REC_TYPE_TPCC
    BYTE    TxnSubType; //
depends on TxnType
// end of common header

    int    DeltaT1; // menu time (ms)
    int    DeltaT2; // keying time (ms)
    int    DeltaT3; // think time (ms)
    int    DeltaT4; // response time (ms)
    int    RTDelay; // response time delay
(ms)
    int    TxnError; // error code
providing more detail for TxnStatus
    WORD    w_id; // warehouse
ID
    BYTE    d_id; // assigned
district ID for this thread
    BYTE    d_id_ThisTxn; // district ID chosen for
this particular
    BYTE    TxnStatus; // completion status for
txn to indicate errors
    BYTE    reserved; // for word alignment
    TXN_DETAILS    TxnDetails; //
} TXN_RECORD_TPCC, *PTXN_RECORD_TPCC;

// TPC-C Deferred Delivery Txn Record Layout:
//
//Incorporating delivery transaction information into the above
//structure would increase the size of TXN_DETAILS from 8 to 42
bytes.
//Hence, we store delivery transaction details in a separate structure.
//
typedef struct _TXN_RECORD_TPCC_DELIV_DEF
{
    // common header; must exactly match
TXN_RECORD_HEADER
    JULIAN_TIME    TxnStartT0; //
start of txn
    BYTE    TxnType; // =
TXN_REC_TYPE_TPCC_DELIV_DEF
    BYTE    TxnSubType; //
= 0
// end of common header

    int    DeltaT4; // response time (ms)
    int    DeltaTxnExec; // execution
time (ms)
    WORD    w_id; // warehouse
ID
    BYTE    TxnStatus; // completion status for
txn to indicate errors
    BYTE    reserved; // for word alignment
    short    o_carrier_id; // carrier id
    long    o_id[10]; // returned delivery
transaction ids

```



```

~CTxnLog(void);

int WriteToLog(PTXN_RECORD_TPCC pTxnRcrd);
int WriteToLog(PTXN_RECORD_TPCC_DELIV_DEF
pTxnRcrd);
int WriteToLog(PTXN_RECORD_CONTROL
pCtrlRec);
int WriteToLog(PTXN_RECORD_HEADER pCtrlRec);
int WriteCtrlRecToLog(BYTE SubType, LPTSTR lpStr,
DWORD dwLen);

void CloseTransactionLogFile(void);

PTXN_RECORD_HEADER GetNextRecord(BOOL
bSkipCtrlRecs = FALSE);
PTXN_RECORD_HEADER
GetNextRecord(JULIAN_TIME SeekTimeT0, BOOL bSkipCtrlRecs =
FALSE);

int Sort(void);
PTXN_RECORD_HEADER GetSortedRecord(int
index);

inline BOOL IsSorted(void) { return bLogSorted; };
inline JULIAN_TIME BeginTS(void) { return
BeginTxnTS; };
};
};

inline JULIAN_TIME EndTS(void) { return EndTxnTS;
};

inline int RecordCount(void) { return iRecCount; };

class CTXNLOG_ERR : public CBaseErr
{
public:
enum CTPCC_DBLIB_ERRS
{
ERR_BAD_FILE_FORMAT = 1, // "File format is invalid."
ERR_UNKNOWN_LOG_VERSION, // "Log file version is unknown."
ERR_BROKEN_LOG_FILE, // "Log file is broken."
ERR_LOG_NOT_SORTED, // "Log file is not sorted"
ERR_INVALID_TIME_SEQ, // "Internal Error: Record Time Sequence invalid."
};

CTXNLOG_ERR( int iErr ) { m_errno = iErr; };

int m_errno;

int ErrorType() {return ERR_TYPE_TXNLOG;};
int ErrorNum() {return m_errno;};

// TODO: need to complete...
char *ErrorText() {return "";};
};

webclnt.dsp

# Microsoft Developer Studio Project File - Name="webclnt" - Package
Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 5.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Application" 0x0101
CFG=webclnt - Win32 Release
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak" CFG="webclnt - Win32 Release"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "webclnt - Win32 Release" (based on "Win32 (x86) Application")
!MESSAGE "webclnt - Win32 Debug" (based on "Win32 (x86) Application")
!MESSAGE

# Begin Project
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "webclnt - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir ".\Release"
# PROP BASE Intermediate_Dir ".\Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\Release"
# PROP Intermediate_Dir ".\Release"
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
"_WINDOWS" /YX /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
"_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /win32
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbccp32.lib /nologo /subsystem:windows /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib odbccp32.lib
/nologo /subsystem:windows /machine:I386

!ELSEIF "$(CFG)" == "webclnt - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir ".\Debug"
# PROP BASE Intermediate_Dir ".\Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\Debug"
# PROP Intermediate_Dir ".\Debug"

```

```

# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG"
/D "_WINDOWS" /YX /c
# ADD CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
"_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /win32
# ADD BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
/odbc32.lib /nologo /subsystem:windows /debug /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
/nologo /subsystem:windows /debug /machine:I386

!ENDIF

# Begin Target

# Name "webclnt - Win32 Release"
# Name "webclnt - Win32 Debug"
# End Target
# End Project

```

## webclnt.dsw

Microsoft Developer Studio Workspace File, Format Version 6.00  
# WARNING: DO NOT EDIT OR DELETE THIS WORKSPACE FILE!

```

#####
#####

```

Project: "db\_dblib\_dll"=.\\db\_dblib\_dll\\db\_dblib\_dll.dsp - Package Owner=<4>

```

Package=<5>
{{{
}}}

```

```

Package=<4>
{{{
}}}

```

```

#####
#####

```

Project: "db\_odbc\_dll"=.\\db\_odbc\_dll\\db\_odbc\_dll.dsp - Package Owner=<4>

```

Package=<5>
{{{
}}}

```

```

Package=<4>
{{{
}}}

```

```

#####
#####

```

Project: "install"=.\\install\\install.dsp - Package Owner=<4>

```

Package=<5>
{{{

```

```

}}}
```

```

Package=<4>
```

```

{{{
  Begin Project Dependency
  Project_Dep_Name isapi_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tuxapp
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name db_dblib_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name db_odbc_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_com_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_tuxedo_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tpcc_com_all
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tpcc_com_ps
  End Project Dependency
}}}
```

```

#####
#####

```

Project: "isapi\_dll"=.\\isapi\_dll\\isapi\_dll.dsp - Package Owner=<4>

```

Package=<5>
{{{
}}}

```

```

Package=<4>
{{{

```

```

  Begin Project Dependency
  Project_Dep_Name db_dblib_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name db_odbc_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_tuxedo_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_com_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_encina_dll
  End Project Dependency
}}}
```

```

#####
#####

```

Project: "tm\_com\_dll"=.\\tm\_com\_dll\\tm\_com\_dll.dsp - Package Owner=<4>

```

Package=<5>
{{{
}}}

```

```

Package=<4>
```

```

{{{
  Begin Project Dependency
  Project_Dep_Name tpcc_com_ps
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tpcc_com_all
  End Project Dependency
}}}

#####
#####

Project: "tm_encina_dll"=. \tm_encina_dll\tm_encina_dll.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
#####

Project: "tm_tuxedo_dll"=. \tm_tuxedo_dll\tm_tuxedo_dll.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
#####

Project: "tpcc_com_all"=. \tpcc_com_all\tpcc_com_all.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
  Begin Project Dependency
  Project_Dep_Name tpcc_com_ps
  End Project Dependency
}}}

#####
#####

Project: "tpcc_com_ps"=. \tpcc_com_ps\tpcc_com_ps.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

```

```

#####
#####

Project: "tuxapp"=. \tuxapp\tuxapp.dsp - Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
  Begin Project Dependency
  Project_Dep_Name db_dblib_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name db_odbc_dll
  End Project Dependency
}}}

#####
#####

Global:

Package=<5>
{{{
}}}

Package=<3>
{{{
}}}

#####
#####

Stored Procedures

neword.sql

-- File:  NEWORD.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates new order transaction stored procedure
--
--       Interface Level: 4.10.000

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_neworder" )
    drop procedure tpcc_neworder
go

create proc tpcc_neworder

                                     @w_id      smallint,
                                     @d_id      tinyint,
                                     @c_id      int,
                                     @o_ol_cnt  tinyint,
                                     @o_all_local tinyint,
                                     @i_id1     int = 0,

@s_w_id1 smallint = 0, @ol_qty1  smallint = 0,
                                     @i_id2     int = 0,

@s_w_id2 smallint = 0, @ol_qty2  smallint = 0,
                                     @i_id3     int = 0,

@s_w_id3 smallint = 0, @ol_qty3  smallint = 0,
                                     @i_id4     int = 0,

@s_w_id4 smallint = 0, @ol_qty4  smallint = 0,

```



```

@s_w_id5 smallint = 0, @ol_qty5 smallint = 0,
@s_w_id6 smallint = 0, @ol_qty6 smallint = 0,
@s_w_id7 smallint = 0, @ol_qty7 smallint = 0,
@s_w_id8 smallint = 0, @ol_qty8 smallint = 0,
@s_w_id9 smallint = 0, @ol_qty9 smallint = 0,
@s_w_id10 smallint = 0, @ol_qty10 smallint = 0,
@s_w_id11 smallint = 0, @ol_qty11 smallint = 0,
@s_w_id12 smallint = 0, @ol_qty12 smallint = 0,
@s_w_id13 smallint = 0, @ol_qty13 smallint = 0,
@s_w_id14 smallint = 0, @ol_qty14 smallint = 0,
@s_w_id15 smallint = 0, @ol_qty15 smallint = 0

```

```

as
declare @w_tax numeric(4,4),
        @d_tax numeric(4,4),
        @c_last char(16),
        @c_credit char(2),
        @c_discount numeric(4,4),
        @i_price numeric(5,2),
        @i_name char(24),
        @i_data char(50),
        @o_entry_d datetime,
        @remote_flag int,
        @s_quantity smallint,
        @s_data char(50),
        @s_dist char(24),
        @li_no int,
        @o_id int,
        @commit_flag tinyint,
        @li_id int,
        @li_s_w_id smallint,
        @li_qty smallint,
        @ol_number int,
        @c_id_local int

```

```
begin
```

```
begin transaction n
```

```
-- get district tax and next available order id and update
-- plus initialize local variables
```

```

update district
set @d_tax = d_tax,
    @o_id = d_next_o_id,
    d_next_o_id = d_next_o_id + 1,
    @o_entry_d = getdate(),
    @li_no = 0,
    @commit_flag = 1
where d_w_id = @w_id and
      d_id = @d_id

```

```
-- process orderlines
```

```

while (@li_no < @o_ol_cnt)
begin

```

```

    @i_id5 int = 0,
    @i_id6 int = 0,
    @i_id7 int = 0,
    @i_id8 int = 0,
    @i_id9 int = 0,
    @i_id10 int = 0,
    @i_id11 int = 0,
    @i_id12 int = 0,
    @i_id13 int = 0,
    @i_id14 int = 0,
    @i_id15 int = 0,

```

```

select @li_no = @li_no + 1
-- set i_id, s_w_id, and qty for this lineitem

```

```

select @li_id = case @li_no
           when 1 then @i_id1
           when 2 then @i_id2
           when 3 then @i_id3
           when 4 then @i_id4
           when 5 then @i_id5
           when 6 then @i_id6
           when 7 then @i_id7
           when 8 then @i_id8
           when 9 then @i_id9
           when 10 then @i_id10
           when 11 then @i_id11
           when 12 then @i_id12
           when 13 then @i_id13
           when 14 then @i_id14
           when 15 then @i_id15
end,

```

```

@li_s_w_id = case @li_no
           when 1 then @s_w_id1
           when 2 then @s_w_id2
           when 3 then @s_w_id3
           when 4 then @s_w_id4
           when 5 then @s_w_id5
           when 6 then @s_w_id6
           when 7 then @s_w_id7
           when 8 then @s_w_id8
           when 9 then @s_w_id9
           when 10 then @s_w_id10
           when 11 then @s_w_id11
           when 12 then @s_w_id12
           when 13 then @s_w_id13
           when 14 then @s_w_id14
           when 15 then @s_w_id15
end,

```

```

@li_qty = case @li_no
           when 1 then @ol_qty1
           when 2 then @ol_qty2
           when 3 then @ol_qty3
           when 4 then @ol_qty4
           when 5 then @ol_qty5
           when 6 then @ol_qty6
           when 7 then @ol_qty7
           when 8 then @ol_qty8
           when 9 then @ol_qty9
           when 10 then @ol_qty10
           when 11 then @ol_qty11
           when 12 then @ol_qty12
           when 13 then @ol_qty13
           when 14 then @ol_qty14
           when 15 then @ol_qty15
end

```

```
-- get item data (no one updates item)
```

```

select @i_price = i_price,
       @i_name = i_name,
       @i_data = i_data
from item (tablock repeatableread)
where i_id = @li_id

```

```
-- update stock values
```

```

update stock
set s_ytd = s_ytd + @li_qty,
  @s_quantity = s_quantity - @li_qty +
  case
  when (s_quantity - @li_qty < 10) then 91 else 0 end,
  s_order_cnt = s_order_cnt + 1,
  s_remote_cnt = s_remote_cnt + case
  when (@li_s_w_id = @w_id) then 0 else 1 end,
  @s_data = s_data,
  @s_dist = case @d_id
s_dist_01 when 1 then
s_dist_02 when 2 then
s_dist_03 when 3 then
s_dist_04 when 4 then
s_dist_05 when 5 then
s_dist_06 when 6 then
s_dist_07 when 7 then
s_dist_08 when 8 then
s_dist_09 when 9 then
s_dist_10 when 10 then
  end
where s_i_id = @li_id and
       s_w_id = @li_s_w_id
-- if there actually is a stock (and item) with these ids, go to work
if (@@rowcount > 0)
begin
-- insert order_line data (using data from item and stock)
insert into order_line values(@o_id,
                             @d_id,
                             @w_id,
                             @li_no,
                             @li_id,
                             @li_s_w_id,
                             "dec 31,
                             1899",
                             @li_qty,
                             @i_price
                             * @li_qty,
                             @s_dist)
-- send line-item data to client
select @i_name,
       @s_quantity,

```

```

       b_g = case when (
(patindex("%ORIGINAL%",@i_data) > 0) and
(patindex("%ORIGINAL%",@s_data) > 0) )
       then "B" else "G" end,
       @i_price,
       @i_price * @li_qty
end
else
begin
-- no item (or stock) found - triggers rollback condition
select "",0,"",0,0
select @commit_flag = 0
end
-- get customer last name, discount, and credit rating
select @c_last = c_last,
       @c_discount = c_discount,
       @c_credit = c_credit,
       @c_id_local = c_id
from customer (repeatable)
where c_id = @c_id and
       c_w_id = @w_id and
       c_d_id = @d_id
-- insert fresh row into orders table
insert into orders values ( @o_id,
                           @d_id,
                           @w_id,
                           @c_id_local,
                           @o_entry_d,
                           0,
                           @o_ol_cnt,
                           @o_all_local)
-- insert corresponding row into new-order table
insert into new_order values ( @o_id,
                              @d_id,
                              @w_id)
-- select warehouse tax
select @w_tax = w_tax
from warehouse (repeatable)
where w_id = @w_id
if (@commit_flag = 1)
commit transaction n
else
-- all that work for nuthin!!!
rollback transaction n
-- return order data to client
select @w_tax,
       @d_tax,
       @o_id,

```

```

        @c_last,
        @c_discount,
        @c_credit,
        @o_entry_d,
        @commit_flag

end

go

payment.sql

-- File: PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates payment transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_payment" )
    drop procedure tpcc_payment
go

create proc tpcc_payment    @w_id        smallint,
                           @c_w_id     smallint,
                           @h_amount   numeric(6,2),
                           @d_id       tinyint,
                           @c_d_id     tinyint,
                           @c_id       int,
                           @c_last     char(16) = ""

as
declare @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city     char(20),
        @w_state    char(2),
        @w_zip      char(9),
        @w_name     char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city     char(20),
        @d_state    char(2),
        @d_zip      char(9),
        @d_name     char(10),
        @c_first   char(16),
        @c_middle  char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city    char(20),
        @c_state   char(2),
        @c_zip     char(9),
        @c_phone   char(16),
        @c_since   datetime,
        @c_credit  char(2),
        @c_credit_lim numeric(12,2),
        @c_balance numeric(12,2),
        @c_discount numeric(4,4),
        @data      char(500),
        @c_data    char(500),
        @datetime  datetime,
        @w_ytd     numeric(12,2),
        @d_ytd     numeric(12,2),
        @cnt       smallint,

```

```

        @val       smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local smallint,
        @c_id_local int

select @screen_data = ""

begin tran p

-- get payment date

        select    @datetime = getdate()

        if (@c_id = 0)
            begin

-- get customer id and info using last name

                select    @cnt = count(*)
                from      customer (repeatableread)
                where     c_last = @c_last and
                c_w_id = @c_w_id and
                c_d_id = @c_d_id

                select    @val = (@cnt + 1) / 2
                set      rowcount @val

                select    @c_id = c_id
                from      customer (repeatableread)
                where     c_last = @c_last and
                c_w_id = @c_w_id and
                c_d_id = @c_d_id

                order    by c_last, c_first

                set      rowcount 0

            end

-- get customer info and update balances

            update    customer
            set      @c_balance = c_balance + @h_amount,
            - @h_amount,
            c_payment_cnt = c_payment_cnt + 1,
            c_ytd_payment = c_ytd_payment + @h_amount,
            @c_first = c_first,
            @c_middle = c_middle,
            @c_last = c_last,
            @c_street_1 = c_street_1,
            @c_street_2 = c_street_2,
            @c_city = c_city,
            @c_state = c_state,
            @c_zip = c_zip,
            @c_phone = c_phone,
            @c_credit = c_credit,
            @c_credit_lim = c_credit_lim,
            @c_discount = c_discount,
            @c_since = c_since,
            @data = c_data,
            @c_id_local = c_id
            where     c_id = @c_id and
            c_w_id = @c_w_id and
            c_d_id = @c_d_id

-- if customer has bad credit get some more info

            if (@c_credit = "BC")

```

```

begin
-- compute new info
select @c_data = convert(char(5),@c_id) +
convert(char(4),@c_d_id) +
convert(char(5),@c_w_id) +
convert(char(4),@d_id) +
convert(char(5),@w_id) +
convert(char(19),@h_amount) +
substring(@data, 1, 458)

-- update customer info
update customer
set c_data = @c_data

where c_id = @c_id and
c_w_id = @c_w_id and
c_d_id = @c_d_id

select @screen_data = substring (@c_data,1,200)

end

-- get district data and update year-to-date
update district
set d_ytd = d_ytd + @h_amount,
@d_street_1 = d_street_1,
@d_street_2 = d_street_2,
@d_city = d_city,
@d_state = d_state,
@d_zip = d_zip,
@d_name = d_name,
@d_id_local = d_id

where d_w_id = @w_id and
d_id = @d_id

-- get warehouse data and update year-to-date
update warehouse
set w_ytd = w_ytd + @h_amount,
@w_street_1 = w_street_1,
@w_street_2 = w_street_2,
@w_city = w_city,
@w_state = w_state,
@w_zip = w_zip,
@w_name = w_name,
@w_id_local = w_id

where w_id = @w_id

-- create history record
insert into history values ( @c_id_local,
@c_d_id,
@c_w_id,
@d_id_local,
@w_id_local,
@datetime,
@h_amount,
@w_name + " " +
@d_name)
commit tran p

-- return data to client

```

```

select @c_id,
@c_last,
@datetime,
@w_street_1,
@w_street_2,
@w_city,
@w_state,
@w_zip,
@d_street_1,
@d_street_2,
@d_city,
@d_state,
@d_zip,
@c_first,
@c_middle,
@c_street_1,
@c_street_2,
@c_city,
@c_state,
@c_zip,
@c_phone,
@c_since,
@c_credit,
@c_credit_lim,
@c_discount,
@c_balance,
@screen_data

```

go

### ordstat.sql

```

-- File: ORDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates order status transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_orderstatus" )
drop procedure tpcc_orderstatus

go

create proc tpcc_orderstatus @w_id smallint,
@d_id tinyint,
@c_id int,
@c_last char(16) = ""

as

declare @c_balance numeric(12,2),
@c_first char(16),
@c_middle char(2),
@o_id int,
@o_entry_d datetime,
@o_carrier_id smallint,
@cnt smallint

begin tran o

if (@c_id = 0)
begin

```

```

-- get customer id and info using last name

select      @cnt      = (count(*)+1)/2
from        customer (repeatableread)
where       c_last    = @c_last and
           c_w_id    = @w_id and
           c_d_id    = @d_id

set         rowcount @cnt

select      @c_id      = c_id,
           @c_balance = c_balance,
           @c_first = c_first,
           @c_last  = c_last,
           @c_middle = c_middle
from        customer (repeatableread)
where       c_last    = @c_last and
           c_w_id    = @w_id and
           c_d_id    = @d_id

order      by c_w_id, c_d_id, c_last, c_first

set         rowcount 0

end

else

begin

-- get customer info if by id

select      @c_balance = c_balance,
           @c_first  = c_first,
           @c_middle = c_middle,
           @c_last   = c_last
from        customer (repeatableread)
where       c_id      = @c_id and
           c_d_id    = @d_id and
           c_w_id    = @w_id

select      @cnt      = @@rowcount

end

-- if no such customer

if (@cnt = 0)
begin
raiserror("Customer not found",18,1)
goto custnotfound
end

-- get order info

select      @o_id      = o_id,
           @o_entry_d = o_entry_d,
           @o_carrier_id = o_carrier_id
from        orders (serializable)
where       o_c_id      = @c_id and
           o_d_id      = @d_id and
           o_w_id      = @w_id

order      by o_id asc

-- select order lines for the current order

select      ol_supply_w_id,
           ol_i_id,
           ol_quantity,

```

```

           ol_amount,
           ol_delivery_d
from        order_line (repeatableread)
where       ol_o_id = @o_id and
           ol_d_id = @d_id and
           ol_w_id = @w_id

custnotfound:

commit tran o

-- return data to client

select      @c_id,
           @c_last,
           @c_first,
           @c_middle,
           @o_entry_d,
           @o_carrier_id,
           @c_balance,
           @o_id

go

delivery.sql

-- File: DELIVERY.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates delivery transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_delivery" )
drop procedure tpcc_delivery

go

create proc tpcc_delivery @w_id smallint,
                        @o_carrier_id smallint
as

declare @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
        @oid3 int,
        @oid4 int,
        @oid5 int,
        @oid6 int,
        @oid7 int,
        @oid8 int,
        @oid9 int,
        @oid10 int

select @d_id = 0

begin tran d

while (@d_id < 10)
begin

```

```

select @d_id = @d_id + 1,
       @total = 0,
       @o_id = 0

select top 1
       @o_id = no_o_id
from   new_order (serializable uplock)
where  no_w_id = @w_id and
       no_d_id = @d_id
order  by no_o_id asc

if (@@rowcount < 0)
begin

-- claim the order for this district

delete new_order
where  no_w_id = @w_id and
       no_d_id = @d_id and
       no_o_id = @o_id

-- set carrier_id on this order (and get customer id)

update orders
set   o_carrier_id =

@o_carrier_id,

where o_w_id = @w_id

and

and

o_d_id = @d_id

o_id = @o_id

-- set date in all lineitems for this order (and sum amounts)

update order_line
set   ol_delivery_d = getdate(),
       @total = @total +

ol_amount

where ol_w_id = @w_id

and

and

ol_d_id = @d_id

ol_o_id = @o_id

-- accumulate lineitem amounts for this order into customer

update customer
set   c_balance = c_balance + @total,
       c_delivery_cnt =

c_delivery_cnt + 1

where c_w_id = @w_id

and

and

c_d_id = @d_id

c_id = @c_id

end

select @oid1 = case @d_id when 1 then @o_id else @oid1 end,
       @oid2 = case @d_id when 2 then @o_id else @oid2 end,
       @oid3 = case @d_id when 3 then @o_id else @oid3 end,
       @oid4 = case @d_id when 4 then @o_id else @oid4 end,
       @oid5 = case @d_id when 5 then @o_id else @oid5 end,
       @oid6 = case @d_id when 6 then @o_id else @oid6 end,
       @oid7 = case @d_id when 7 then @o_id else @oid7 end,
       @oid8 = case @d_id when 8 then @o_id else @oid8 end,
       @oid9 = case @d_id when 9 then @o_id else @oid9 end,

```

```

       @oid10 = case @d_id when 10 then @o_id else @oid10 end

end

commit tran d

-- return delivery data to client

select @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10

go

stocklev.sql

-- File: STOCKLEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates stock level transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_stocklevel" )
drop procedure tpcc_stocklevel
go

create proc tpcc_stocklevel @w_id smallint,
                           @d_id tinyint,
                           @threshold smallint
as

declare @o_id_low int,
        @o_id_high int

select @o_id_low = (d_next_o_id - 20),
       @o_id_high = (d_next_o_id - 1)
from   district
where  d_w_id = @w_id and
       d_id = @d_id

select count(distinct(s_i_id))
from   stock_order_line
where  ol_w_id = @w_id and
       ol_d_id = @d_id and
       ol_o_id between @o_id_low and
                @o_id_high and
       s_w_id = ol_w_id and
       s_i_id = ol_i_id and
       s_quantity < @threshold

go

```

**version.sql**

```
-- File:  VERSION.SQL
--      Microsoft TPC-C Benchmark Kit Ver. 4.22
--      Copyright Microsoft, 2001
-- Purpose: Returns version level of TPC-C stored procs
-- Note:   Always update the return value of this proc for
--         any interface changes or "must have" bug fixes.
--
-- The value returned by this SP defines the "interface level",
-- which must match between the stored procs and the client code.
-- The interface level may be down rev from the current kit. This
-- indicates that the interface hasn't changed since that version.
```

```
use tpcc
go
```

```
if exists ( select name from sysobjects where name = "tpcc_version" )
    drop procedure tpcc_version
go
```

```
create proc tpcc_version
as
declare    @version char(8)
```

```
begin
    select @version = "4.10.000"
    select @version as "Version"
end
```

```
Go
```

### ***null-txn.sql***

```
-- TPC-C Null Txn Stored Procs
-- Microsoft TPC-C Kit
-- 8/17/99
--
-- This script will create stored procs which accept the same parameters and
-- return correctly formed
-- results sets to match the standard TPC-C stored procs. Of course, the advantage
-- is that these
-- stored procs place almost no load on SQL Server and do not require a
-- database.
--
-- The purpose of these stored procs is to size and test the web client without the
-- need of a fully
-- scaled database.
```

```
--
drop proc tpcc_delivery
drop proc tpcc_neworder
drop proc tpcc_orderstatus
drop proc tpcc_payment
drop proc tpcc_stocklevel
drop proc tpcc_version
drop table order_line_null
go
```

```
create proc tpcc_delivery    @w_id    smallint,
```

```
@o_carrier_id smallint
as
```

```
declare @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
```

```
@oid3 int,
@oid4 int,
@oid5 int,
@oid6 int,
@oid7 int,
@oid8 int,
@oid9 int,
@oid10 int
```

```
declare @delaytime varchar(30)
```

```
-- uniform random delay of 0 - 1 second; avg = 0.50
select @delaytime = '00:00:0' + cast(cast((rand()*1.00) as decimal(4,3)) as
char(5))
waitfor delay @delaytime
```

```
select 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001
```

```
GO
```

```
create proc tpcc_neworder
```

```
@w_id    smallint,
@d_id    tinyint,
@c_id    int,
@o_ol_cnt tinyint,
@o_all_local tinyint,
@i_id1   int = 0,
@i_id2   int = 0,
@i_id3   int = 0,
@i_id4   int = 0,
@i_id5   int = 0,
@i_id6   int = 0,
@i_id7   int = 0,
@i_id8   int = 0,
@i_id9   int = 0,
@i_id10  int = 0,
@i_id11  int = 0,
@i_id12  int = 0,
@i_id13  int = 0,
@i_id14  int = 0,
@i_id15  int = 0,
@s_w_id1 smallint = 0, @ol_qty1 smallint = 0,
@s_w_id2 smallint = 0, @ol_qty2 smallint = 0,
@s_w_id3 smallint = 0, @ol_qty3 smallint = 0,
@s_w_id4 smallint = 0, @ol_qty4 smallint = 0,
@s_w_id5 smallint = 0, @ol_qty5 smallint = 0,
@s_w_id6 smallint = 0, @ol_qty6 smallint = 0,
@s_w_id7 smallint = 0, @ol_qty7 smallint = 0,
@s_w_id8 smallint = 0, @ol_qty8 smallint = 0,
@s_w_id9 smallint = 0, @ol_qty9 smallint = 0,
@s_w_id10 smallint = 0, @ol_qty10 smallint = 0,
@s_w_id11 smallint = 0, @ol_qty11 smallint = 0,
@s_w_id12 smallint = 0, @ol_qty12 smallint = 0,
@s_w_id13 smallint = 0, @ol_qty13 smallint = 0,
@s_w_id14 smallint = 0, @ol_qty14 smallint = 0,
@s_w_id15 smallint = 0, @ol_qty15 smallint = 0
```

```
as
```

```
declare @w_tax    numeric(4,4),
        @d_tax    numeric(4,4),
        @c_last   char(16),
        @c_credit char(2),
        @c_discount numeric(4,4),
        @i_price   numeric(5,2),
        @i_name    char(24),
        @o_entry_d datetime,
```

```

        @li_no      int,
        @o_id       int,
        @commit_flag tinyint,
        @li_id      int,
        @li_qty     smallint

declare @delaytime varchar(30)

begin
-- uniform random delay of 0 - 0.6 second; avg = 0.3
select @delaytime = '00:00:0' + cast(cast((rand()*0.60) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

-- process orderlines

        select @commit_flag = 1, @li_no = 0

while (@li_no < @o_ol_cnt)
begin
        select @li_id = case @li_no
                when 1 then @i_id1
                when 2 then @i_id2
                when 3 then @i_id3
                when 4 then @i_id4
                when 5 then @i_id5
                when 6 then @i_id6
                when 7 then @i_id7
                when 8 then @i_id8
                when 9 then @i_id9
                when 10 then @i_id10
                when 11 then @i_id11
                when 12 then @i_id12
                when 13 then @i_id13
                when 14 then @i_id14
                when 15 then @i_id15
        end

select @li_no = @li_no + 1
        select @i_price = 23.45, @li_qty = @li_no

        if (@li_id = 999999)
                begin
                select ",0",0,0
                select @commit_flag = 0
                end

        else
                begin
                select 'Item Name blah',17,'G', @i_price, @i_price *
@li_qty

                end

        end

-- return order data to client

        select
                @w_tax = 0.1234,
                @d_tax = 0.0987,
                @o_id = 3001,
                @c_last = 'BAROUGHTABLE',
                @c_discount = 0.2198,
                @c_credit = 'GC',
                @o_entry_d = getdate()

        select
                @w_tax,
                @d_tax,

```

```

        @o_id,
        @c_last,
        @c_discount,
        @c_credit,
        @o_entry_d,
        @commit_flag

end

GO

create proc tpcc_orderstatus @w_id          smallint,

        @d_id          tinyint,

        @c_id          int,

        @c_last      char(16) = "

as

declare @c_balance      numeric(12,2),
        @c_first        char(16),
        @c_middle       char(2),
        @o_id           int,
        @o_entry_d       datetime,
        @o_carrier_id    smallint,
        @ol_cnt          smallint

declare @delaytime varchar(30)

-- uniform random delay of 0 - 0.2 second; avg = 0.1
select @delaytime = '00:00:0' + cast(cast((rand()*0.20) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

        select
                @c_id      = 113,
                @c_balance = -10.00,
                @c_first   = '8YCodgytqCj8',
                @c_middle  = 'OE',
                @c_last    = 'OUGHTOUGHTABLE',
                @o_id      = 3456,
                @o_entry_d = getdate(),
                @o_carrier_id = 1

        select @ol_cnt = (rand() * 11) + 5
        SET ROWCOUNT @ol_cnt

        select
                ol_supply_w_id,
                ol_i_id,
                ol_quantity,
                ol_amount,
                ol_delivery_d
        from order_line_null

        select @c_id,
                @c_last,
                @c_first,
                @c_middle,
                @o_entry_d,
                @o_carrier_id,
                @c_balance,
                @o_id

```



```

GO
create proc tpcc_payment @w_id      smallint,
                           @c_w_id  @c_w_id
                           @h_amount @h_amount -- get warehouse data and update year-to-date
                           @d_id     @d_id
                           @c_d_id   @c_d_id
                           @c_id     @c_id
                           @c_last   @c_last
                           char(16) = "
as
declare @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city     char(20),
        @w_state    char(2),
        @w_zip      char(9),
        @w_name     char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city     char(20),
        @d_state    char(2),
        @d_zip      char(9),
        @d_name     char(10),
        @c_first    char(16),
        @c_middle   char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city     char(20),
        @c_state    char(2),
        @c_zip      char(9),
        @c_phone    char(16),
        @c_since    datetime,
        @c_credit   char(2),
        @c_credit_lim numeric(12,2),
        @c_balance  numeric(12,2),
        @c_discount numeric(4,4),
        @data       char(500),
        @c_data     char(500),
        @datetime   datetime,
        @w_ytd     numeric(12,2),
        @d_ytd     numeric(12,2),
        @cnt       smallint,
        @val       smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local  smallint,
        @c_id_local  int

declare @delaytime varchar(30)

-- uniform random delay of 0 - 0.3 second; avg = 0.15
select @delaytime = '00:00:0' + cast(cast((rand()*0.30) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

select @screen_data = "

-- get customer info and update balances

select
        @d_street_1 = 'rqSHHakqyV',
        @d_street_2 = 'zZ98nW3BR2s',
        @d_city     = 'ArNr4GNFV9',
        @d_state    = 'aV',
        @d_zip      = '453511111'

select
        @w_street_1 = 'rqSHHakqyV',
        @w_street_2 = 'zZ98nW3BR2s',
        @w_city     = 'ArNr4GNFV9',
        @w_state    = 'aV',
        @w_zip      = '453511111'

select
        @c_id       = 123,
        @c_balance  = -10000.00,
        @c_first    = 'KmR03Xureb',
        @c_middle   = 'OE',
        @c_last     = 'BAROUGHTBAR',
        @c_street_1 = 'QpGdOHjv8mR9vNI8V',
        @c_street_2 = 'dzKoCObBqbC3yu',
        @c_city     = 'zAKZXdC037FQxq',
        @c_state    = 'QA',
        @c_zip      = '700311111',
        @c_phone    = '2967264064528555',
        @c_credit   = 'GC',
        @c_credit_lim = 50000.00,
        @c_discount = 0.3069,
        @c_since    = getdate(),
        @datetime   = getdate()

-- return data to client
select @c_id,
        @c_last,
        @datetime,
        @w_street_1,
        @w_street_2,
        @w_city,
        @w_state,
        @w_zip,
        @d_street_1,
        @d_street_2,
        @d_city,
        @d_state,
        @d_zip,
        @c_first,
        @c_middle,
        @c_street_1,
        @c_street_2,
        @c_city,
        @c_state,
        @c_zip,
        @c_phone,
        @c_since,
        @c_credit,
        @c_credit_lim,
        @c_discount,
        @c_balance,
        @screen_data
GO

```

```

create proc tpcc_stocklevel      @w_id          smallint,
                                @d_id          tinyint,
                                @threshold    smallint
as
declare @delaytime varchar(30)
-- uniform random delay of 0 - 3.6 second; avg = 1.8
select @delaytime = '00:00:0' + cast(cast((rand()*3.60) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

select 49

GO

create proc tpcc_version
as
declare @version char(8)

begin
select @version = '4.10.000'
select @version as 'Version'

end

GO

CREATE TABLE order_line_null (
    [ol_i_id] [int] NOT NULL ,
    [ol_supply_w_id] [smallint] NOT NULL ,
    [ol_delivery_d] [datetime] NOT NULL ,
    [ol_quantity] [smallint] NOT NULL ,
    [ol_amount] [numeric](6, 2) NOT NULL
) ON [PRIMARY]
GO

insert into order_line_null values ( 101, 1, getdate(), 1, 123.45 )
insert into order_line_null values ( 102, 1, getdate(), 2, 123.45 )
insert into order_line_null values ( 103, 1, getdate(), 3, 123.45 )
insert into order_line_null values ( 104, 1, getdate(), 4, 123.45 )
insert into order_line_null values ( 105, 1, getdate(), 5, 123.45 )
insert into order_line_null values ( 106, 1, getdate(), 1, 123.45 )
insert into order_line_null values ( 107, 1, getdate(), 2, 123.45 )
insert into order_line_null values ( 108, 1, getdate(), 3, 123.45 )
insert into order_line_null values ( 109, 1, getdate(), 4, 123.45 )
insert into order_line_null values ( 110, 1, getdate(), 5, 123.45 )
insert into order_line_null values ( 111, 1, getdate(), 1, 123.45 )
insert into order_line_null values ( 112, 1, getdate(), 2, 123.45 )
insert into order_line_null values ( 113, 1, getdate(), 3, 123.45 )
insert into order_line_null values ( 114, 1, getdate(), 4, 123.45 )
insert into order_line_null values ( 115, 1, getdate(), 5, 123.45 )

GO

```

# Appendix B: Database Design

## Database Build

### backup.sql

```
-- File: BACKUP.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates backup of tpcc database

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

dump database tpcc to tpccback1, tpccback2, tpccback3, tpccback4 with init,
stats = 1

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

Go

### backupdev.sql

```
-- File: BACKUPDEVB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates tpcc database Backup Devices

use master
go

-- create backup devices

exec sp_addumpdevice 'disk','tpccback1','Y:\tpccback1.dmp'
go
exec sp_addumpdevice 'disk','tpccback2','Z:\tpccback2.dmp'
go
exec sp_addumpdevice 'disk','tpccback3','Y:\tpccback3.dmp'
go
exec sp_addumpdevice 'disk','tpccback4','Z:\tpccback4.dmp'
Go
```

### createdb.sql

```
-- File: CREATEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates tpcc database and backup files

use master
go

-- Create temporary table for timing

if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer

go
```

```
create table tpcc_timer
(
    start_date char(30),
    end_date char(30)
)

insert into tpcc_timer values (0,0)
go

-- Store starting time

update tpcc_timer
set start_date = (select convert(char(30), getdate(),9))
go

-- create main database files

CREATE DATABASE tpcc
ON PRIMARY
(
    NAME = MSSQL_tpcc_root,
    FILENAME = "Y:\MSSQL_tpcc_root.mdf",
    SIZE = 8MB,
    FILEGROWTH =0),
FILEGROUP MSSQL_misc_fg
(
    NAME = MSSQL_misc1,
    FILENAME = "F:",
    SIZE = 130000MB,
    FILEGROWTH = 0),
FILEGROUP MSSQL_cs_fg
(
    NAME = MSSQL_cs1,
    FILENAME = "G:",
    SIZE = 75000MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_cs2,
    FILENAME = "H:",
    SIZE = 55000MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_cs3,
    FILENAME = "I:",
    SIZE = 75000MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_cs4,
    FILENAME = "J:",
    SIZE = 55000MB,
    FILEGROWTH = 0)
LOG ON
(
    NAME =MSSQL_tpcc_log,
    FILENAME = "E:",
    SIZE = 120000MB,
    FILEGROWTH =0)
COLLATE Latin1_General_BIN
go

-- Store ending time
update tpcc_timer
set end_date = (select convert(char(30), getdate(),9))
go

select "Elapsed time (in seconds): ", datediff(second,(select start_date from
tpcc_timer),(select end_date from tpcc_timer))

-- remove temporary table

if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer

go
```

## dbopt1.sql

```
-- File: DBOPT1.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Sets database options for data load
```

```
use master
go
```

```
exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
exec sp_dboption tpcc,'torn page detection',false
go
```

```
use tpcc
go
```

```
checkpoint
Go
```

## dbopt2.sql

```
-- File: DBOPT2.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Resets database options after data load
```

```
sp_dboption tpcc,'select into/bulkcopy',FALSE
GO
```

```
sp_dboption tpcc,'trunc. log on chkpt.',FALSE
GO
```

```
USE tpcc
GO
```

```
CHECKPOINT
GO
```

```
sp_configure 'allow updates',1
GO
```

```
RECONFIGURE WITH OVERRIDE
GO
```

```
DECLARE @msg varchar(50)
```

```
--
-- OPTIONS FOR SQL SERVER 8.0 --
-- Set option values for user-defined indexes --
--
```

```
SET @msg = ''
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ''
PRINT @msg
```

```
EXEC sp_indexoption 'customer', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'district', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'warehouse', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'stock', 'DisallowPageLocks', TRUE
```

```
EXEC sp_indexoption 'order_line', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'orders', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'new_order', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowPageLocks', TRUE
GO
```

```
Print ''
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print ' Lockflag = 0 ==> No pre-specified hierarchy'
Print ' Lockflag = 1 ==> Lock at Page-level then Table-level'
Print ' Lockflag = 2 ==> Lock at Row-level then Table-level'
Print ' Lockflag = 3 ==> Lock at Table-level'
Print ''
```

```
SELECT name,lockflags
FROM sysindexes
WHERE object_id('warehouse') = id OR
object_id('district') = id OR
object_id('customer') = id OR
object_id('stock') = id OR
object_id('orders') = id OR
object_id('order_line')= id OR
object_id('history') = id OR
object_id('new_order') = id OR
object_id('item') = id
ORDER BY lockflags asc
GO
```

```
sp_configure 'allow updates',0
GO
```

```
RECONFIGURE WITH OVERRIDE
GO
```

```
EXEC sp_dboption tpcc, 'auto update statistics',FALSE
EXEC sp_dboption tpcc, 'auto create statistics', FALSE
GO
```

```
EXEC sp_tableoption 'district', 'pintable',true
EXEC sp_tableoption 'warehouse', 'pintable',true
EXEC sp_tableoption 'new_order', 'pintable',true
EXEC sp_tableoption 'item', 'pintable',true
GO
```

## idxcuscl.sql

```
-- File: IDXCUSCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on customer table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'customer_cl' )
```

```

drop index customer.customer_c1

create unique clustered index customer_c1 on customer(c_w_id, c_d_id, c_id)
on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

### **idxcusnc.sql**

```

-- File:  IDXCUSNC.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates non-clustered index on customer table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_nc1' )
drop index customer.customer_nc1

create unique nonclustered index customer_nc1 on customer(c_w_id, c_d_id,
c_last, c_first, c_id)
on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

### **idxdiscl.sql**

```

-- File:  IDXDISCL.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates clustered index on district table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'district_c1' )
drop index district.district_c1

create unique clustered index district_c1 on district(d_w_id, d_id)
with fillfactor=100 on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

```

go

### **idxitmcl.sql**

```

-- File:  IDXITMCL.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates clustered index on item table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'item_c1' )
drop index item.item_c1

create unique clustered index item_c1 on item(i_id)
on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

### **idxnodcl.sql**

```

-- File:  IDXNODCL.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates clustered index on new_order table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'new_order_c1' )
drop index new_order.new_order_c1

create unique clustered index new_order_c1 on new_order(no_w_id, no_d_id,
no_o_id)
on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

### **idxodlcl.sql**

```

-- File:  IDXODLCL.SQL

```

```

-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on order_line table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'order_line_c1' )
    drop index order_line.order_line_c1

create unique clustered index order_line_c1 on order_line(ol_w_id, ol_d_id,
ol_o_id, ol_number)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

### ***idxordcl.sql***

```

-- File:  IDXORDCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on orders table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_c1' )
    drop index orders.orders_c1

create unique clustered index orders_c1 on orders(o_w_id, o_d_id, o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

### ***idxordnc.sql***

```

-- File:  IDXORDNC.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates non-clustered index on orders table

use tpcc
go

```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_nc1' )
    drop index orders.orders_nc1

create index orders_nc1 on orders(o_w_id, o_d_id, o_c_id, o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

### ***idxstkcl.sql***

```

-- File:  IDXSTKCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on stock table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'stock_c1' )
    drop index stock.stock_c1

create unique clustered index stock_c1 on stock(s_i_id, s_w_id)
    on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

### ***idxwarcl.sql***

```

-- File:  IDXWARCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on warehouse table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'warehouse_c1' )
    drop index warehouse.warehouse_c1

create unique clustered index warehouse_c1 on warehouse(w_id)

```

```
with fillfactor=100 on MSSQL_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

## **removedb.sql**

```
-- File:   REMOVEDB.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose: Removes tpcc database and backup files
```

```
use master
go
```

```
-- remove any existing database and backup files
```

```
exec sp_dbremove tpcc, dropdev
go
```

```
exec sp_dropdevice 'tpccback1'
exec sp_dropdevice 'tpccback2'
exec sp_dropdevice 'tpccback3'
exec sp_dropdevice 'tpccback4'
go
```

## **restore.sql**

```
-- File:   RESTORE.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose: Loads database backup from backup files
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
--select "Start date:", convert(varchar(30),@startdate,9)
```

```
load database tpcc from tpccback1, tpccback2, tpccback3, tpccback4 with stats
= 1
```

```
select @enddate = getdate()
--select "End date: ", convert(varchar(30),@enddate,9)
--select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

## **RunSQLCfg.sql**

```
/* TPC-C Benchmark Kit */
/* */
/* RUNSQLCFG.SQL */
/* This script file is used to set runtime server configuration parameters */
/* */
```

```
exec sp_configure "show advanced option", 1
```

```
go
```

```
reconfigure with override
```

```
go
```

```
/* change this value to approximately the number of connected users */
exec sp_configure "max worker threads",240
```

```
/* increase priority of user threads */
exec sp_configure "priority boost",1
```

```
/* disable automatic checkpointing */
exec sp_configure "recovery interval",56
```

```
/* change to a mask appropriate for the number of processors on the server */
exec sp_configure "affinity mask",0x7
```

```
/* enable fibers */
exec sp_configure "lightweight pooling",1
```

```
/* enable update */
exec sp_configure "allow updates",1
```

```
/* set max degree of parallelism */
exec sp_configure "max degree of parallelism",1
```

```
go
```

```
reconfigure with override
```

```
go
```

## **sqlshutdown.sql**

```
use tpcc
go
checkpoint
go
shutdown
go
```

## **tables.sql**

```
-- File:   TABLES.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose: Creates TPC-C tables
```

```
use tpcc
go
```

```
--
-- Remove all existing TPC-C tables
--
```

```
if exists ( select name from sysobjects where name = 'warehouse' )
drop table warehouse
```

```
go
if exists ( select name from sysobjects where name = 'district' )
drop table district
```

```
go
if exists ( select name from sysobjects where name = 'customer' )
drop table customer
```

```
go
if exists ( select name from sysobjects where name = 'history' )
```

```

drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )
drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
drop table stock
go
--
-- Create new tables
--

create table warehouse
(
    w_id                smallint,
    w_name              char(10),
    w_street_1          char(20),
    w_street_2          char(20),
    w_city              char(20),
    w_state             char(2),
    w_zip              char(9),
    w_tax              numeric(4,4),
    w_ytd              numeric(12,2)
) on MSSQL_misc_fg
go

create table district
(
    d_id                tinyint,
    d_w_id              smallint,
    d_name              char(10),
    d_street_1          char(20),
    d_street_2          char(20),
    d_city              char(20),
    d_state             char(2),
    d_zip              char(9),
    d_tax              numeric(4,4),
    d_ytd              numeric(12,2),
    d_next_o_id         int
) on MSSQL_misc_fg
go

create table customer
(
    c_id                int,
    c_d_id              tinyint,
    c_w_id              smallint,
    c_first             char(16),
    c_middle            char(2),
    c_last              char(16),
    c_street_1          char(20),
    c_street_2          char(20),
    c_city              char(20),
    c_state             char(2),
    c_zip              char(9),
    c_phone             char(16),
    c_since             datetime,
    c_credit            char(2),

```

```

    c_credit_lim        numeric(12,2),
    c_discount          numeric(4,4),
    c_balance           numeric(12,2),
    c_ytd_payment      numeric(12,2),
    c_payment_cnt      smallint,
    c_delivery_cnt     smallint,
    c_data              char(500)
) on MSSQL_cs_fg
go

create table history
(
    h_c_id              int,
    h_c_d_id            tinyint,
    h_c_w_id            smallint,
    h_d_id              tinyint,
    h_w_id              smallint,
    h_date              datetime,
    h_amount            numeric(6,2),
    h_data              char(24)
) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id             int,
    no_d_id             tinyint,
    no_w_id             smallint
) on MSSQL_misc_fg
go

create table orders
(
    o_id                int,
    o_d_id              tinyint,
    o_w_id              smallint,
    o_c_id              int,
    o_entry_d           datetime,
    o_carrier_id        tinyint,
    o_ol_cnt            tinyint,
    o_all_local         tinyint
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id             int,
    ol_d_id             tinyint,
    ol_w_id             smallint,
    ol_number           tinyint,
    ol_i_id             int,
    ol_supply_w_id      smallint,
    ol_delivery_d        datetime,
    ol_quantity         smallint,
    ol_amount           numeric(6,2),
    ol_dist_info        char(24)
) on MSSQL_misc_fg
go

create table item
(
    i_id                int,
    i_im_id             int,
    i_name              char(24),
    i_price             numeric(5,2),
    i_data              char(50)
) on MSSQL_misc_fg
go

```



```

create table stock
(
    s_i_id                int,
    s_w_id                smallint,
    s_quantity            smallint,
    s_dist_01             char(24),
    s_dist_02             char(24),
    s_dist_03             char(24),
    s_dist_04             char(24),
    s_dist_05             char(24),
    s_dist_06             char(24),
    s_dist_07             char(24),
    s_dist_08             char(24),
    s_dist_09             char(24),
    s_dist_10             char(24),
    s_ytd                 int,
    s_order_cnt           smallint,
    s_remote_cnt          smallint,
    s_data                char(50)
) on MSSQL_cs_fg
go

```

### Verify\_TpccLoad.sql

```

-- File:  VERIFYTPCCLOAD.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Performs series of TPCC database checks to verify
--          that database load completed correctly

print  " "
select  convert(char(30), getdate(),9)
print  " "

use tpcc
go

-- *****
--
-- Check rows per table from SYSINDEXES
--
-- *****

print  'WAREHOUSE TABLE'

select  rows
from    sysindexes
where   id      = object_id("warehouse")
go

print  'DISTRICT TABLE = (10 * No of warehouses)'

select  rows
from    sysindexes
where   id      =object_id("district")
go

print  'ITEM TABLE = 100,000'

select  rows
from    sysindexes
where   id      =object_id("item")
go

print  'CUSTOMER TABLE = (30,000 * No of warehouses)'

```

```

select  rows
from    sysindexes
where   id      =object_id("customer")
go

print  'ORDERS TABLE = (30,000 * No of warehouses)'

select  rows
from    sysindexes
where   id      =object_id("orders")
go

print  'HISTORY TABLE = (30,000 * No of warehouses)'

select  rows
from    sysindexes
where   id      =object_id("history")
go

print  'STOCK TABLE = (100,000 * No of warehouses)'

select  rows
from    sysindexes
where   id      =object_id("stock")
go

print  'ORDER_LINE TABLE = (300,000 * No of warehouses + some
change)'

select  rows
from    sysindexes
where   id      =object_id("order_line")
go

print  'NEW_ORDER TABLE = (9000 * No of warehouses)'

select  rows
from    sysindexes
where   id      =object_id("new_order")
go

-- *****
--
-- Check indices
--
-- *****

print  '*****Index Check*****'

use tpcc
go

sp_helpindex  customer
go

sp_helpindex  stock
go

sp_helpindex  district
go

sp_helpindex  item
go

sp_helpindex  new_order
go

sp_helpindex  orders

```

```

go

sp_helpindex      order_line
go

sp_helpindex      warehouse
go

```

## version.sql

```

-- File:  VERSION.SQL
--      Microsoft TPC-C Benchmark Kit Ver. 4.22
--      Copyright Microsoft, 2001
-- Purpose: Returns version level of TPC-C stored procs
-- Note:   Always update the return value of this proc for
--         any interface changes or "must have" bug fixes.
--
-- The value returned by this SP defines the "interface level",
-- which must match between the stored procs and the client code.
-- The interface level may be down rev from the current kit. This
-- indicates that the interface hasn't changed since that version.

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_version" )
    drop procedure tpcc_version
go

create proc tpcc_version
as
declare    @version char(8)

begin
    select @version = "4.10.000"
    select @version as "Version"
end

go

```

## Load Source Code

### getargs.c

```

//      File:          GETARGS.C
//                  Microsoft TPC-C Kit Ver. 4.22
//                  Copyright Microsoft, 1996, 1997,
//                  1998, 1999, 2000, 2001
//      Purpose:   Source file for command line processing

// Includes
#include "tpcc.h"

//=====
//
// Function name: GetArgsLoader
//
//=====

void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{

```

```

    int          i;
    char        *ptr;

#ifdef DEBUG
    printf("[%d]DBG: Entering GetArgsLoader()\n", (int)
GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server          = SERVER;
    pargs->user            = USER;
    pargs->password        = PASSWORD;
    pargs->database        = DATABASE;
    pargs->batch           = BATCH;
    pargs->num_warehouses  = UNDEF;
    pargs->tables_all      = TRUE;
    pargs->table_item      = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer  = FALSE;
    pargs->table_orders    = FALSE;
    pargs->loader_res_file =
LOADER_RES_FILE;
    pargs->pack_size       = DEFLDPACKSIZE;
    pargs->starting_warehouse =
DEF_STARTING_WAREHOUSE;
    pargs->build_index     = BUILD_INDEX;
    pargs->index_order     = INDEX_ORDER;
    pargs->index_script_path = INDEX_SCRIPT_PATH;
    pargs->scale_down      = SCALE_DOWN;

    /* check for zero command line args */
    if ( argc == 1 )
        GetArgsLoaderUsage();

    for ( i = 1; i < argc; ++i )
    {
        if (argv[i][0] != '-' && argv[i][0] != '/')
        {
            printf("\nUnrecognized command");
            GetArgsLoaderUsage();
            exit(1);
        }

        ptr = argv[i];

        switch (ptr[1])
        {
            case 'h': /* Fall through */
            case 'H':
                GetArgsLoaderUsage();
                break;

            case 'D':
                pargs->database = ptr+2;
                break;

            case 'P':
                pargs->password = ptr+2;
                break;

            case 'S':
                pargs->server = ptr+2;
                break;

            case 'U':
                pargs->user = ptr+2;
                break;

```

<pre> case 'b':     pargs-&gt;batch = atol(ptr+2);     break;  case 'W':     pargs-&gt;num_warehouses = atol(ptr+2);     break;  case 's':     pargs-&gt;starting_warehouse = atol(ptr+2);     break;  case 't':     {         pargs-&gt;tables_all = FALSE;         if (strcmp(ptr+2,"item") == 0)             pargs-&gt;table_item = TRUE;         else if             (strcmp(ptr+2,"warehouse") == 0)             pargs-&gt;table_warehouse = TRUE;         else if             (strcmp(ptr+2,"customer") == 0)             pargs-&gt;table_customer = TRUE;         else if             (strcmp(ptr+2,"orders") == 0)             pargs-&gt;table_orders = TRUE;         else         {             printf("\nUnrecognized command");             GetArgsLoaderUsage();             exit(1);         }         break;     }  case 'f':     pargs-&gt;loader_res_file = ptr+2;     break;  case 'p':     pargs-&gt;pack_size = atol(ptr+2);     break;  case 'i':     pargs-&gt;build_index = atol(ptr+2);     break;  case 'o':     pargs-&gt;index_order = atol(ptr+2);     break;  case 'c':     pargs-&gt;scale_down = atol(ptr+2);     break;  case 'd':     pargs-&gt;index_script_path = ptr+2;     break; </pre>	<pre> default:     GetArgsLoaderUsage();     exit(-1);     break; }  }  /* check for required args */ if (pargs-&gt;num_warehouses == UNDEF ) {     printf("Number of Warehouses is required\n");     exit(-2); }  return; }  ===== // // Function name: GetArgsLoaderUsage // =====  void GetArgsLoaderUsage() { #ifdef DEBUG     printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId()); #endif      printf("TPCCLDR:\n\n");     printf("Parameter                Default\n");     printf("-----\n");     printf("-W Number of Warehouses to Load      Required\n");     printf("-S Server                               %s\n", SERVER);     printf("-U Username                             %s\n", USER);     printf("-P Password                             %s\n", PASSWORD);     printf("-D Database                             %s\n", DATABASE);     printf("-b Batch Size                           %ld\n", (long) BATCH);     printf("-p TDS packet size                       %ld\n", (long) DEFLDPACKSIZE);     printf("-f Loader Results Output Filename      %s\n", LOADER_RES_FILE);     printf("-s Starting Warehouse                   %ld\n", (long) DEF_STARTING_WAREHOUSE);     printf("-i Build Option (data = 0, data and index = 1) %ld\n", (long) BUILD_INDEX);     printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n", (long) INDEX_ORDER);     printf("-c Build Scaled Database (normal = 0, tiny = 1) %ld\n", (long) SCALE_DOWN);     printf("-d Index Script Path                     %s\n", INDEX_SCRIPT_PATH);     printf("-t Table to Load                         all tables\n");     printf(" [item warehouse customer orders]\n");     printf(" Notes: \n");     printf(" - the '-t' parameter may be included multiple times to \n");     printf(" specify multiple tables to be loaded \n");     printf(" - 'item' loads ITEM table \n");     printf(" - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n"); </pre>
--	---

```

printf(" - 'customer' loads CUSTOMER and HISTORY tables \n");
printf(" - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables
\n");

printf("\nNote: Command line switches are case sensitive.\n");

exit(0);
}

```

## random.c

```

// File: RANDOM.C
// Microsoft TPC-C Kit Ver. 4.22
// Copyright Microsoft, 1996, 1997,
1998, 1999, 2000, 2001
// Purpose: Random number generation routines for database loader

```

```

// Includes
#include "tpcc.h"
#include "math.h"

```

```

// Defines
#define A 16807
#define M 2147483647
#define Q 127773 /* M div A */
#define R 2836 /* M mod A */
#define Thread __declspec(thread)

```

```

// Globals
long Thread Seed = 0; /* thread local seed */

```

```

/*****
*****
* random -
* Implements a GOOD pseudo random number generator. This generator
* will/should? run the complete period before repeating.
* Copied from:
* Random Numbers Generators: Good Ones Are Hard to Find.
* Communications of the ACM - October 1988 Volume 31 Number 10
* Machine Dependencies:
* long must be 2 ^ 31 - 1 or greater.
*****
*****/

```

```

/*****
*****
* seed - load the Seed value used in irand and drand. Should be used before *
* first call to irand or drand.
*****
*****/

```

```

void seed(long val)
{

```

```

#ifdef DEBUG
printf("[%d]DBG: Entering seed(...\n", (int) GetCurrentThreadId());
printf("Old Seed %ld New Seed %ld\n",Seed, val);
#endif

```

```

if ( val < 0 )

```

```

val = abs(val);

```

```

Seed = val;
}

```

```

/*****
*****
* irand - returns a 32 bit integer pseudo random number with a period of *
* 1 to 2 ^ 32 - 1.
* parameters:
* none.
* returns:
* 32 bit integer - defined as long ( see above ).
* side effects:
* seed get recomputed.
*****
*****/

```

```

long irand()
{

```

```

register long s; /* copy of seed */
register long test; /* test flag */
register long hi; /* tmp value for speed */
register long lo; /* tmp value for speed */

```

```

#ifdef DEBUG
printf("[%d]DBG: Entering irand(...\n", (int) GetCurrentThreadId());
#endif

```

```

s = Seed;
hi = s / Q;
lo = s % Q;

```

```

test = A * lo - R * hi;
if ( test > 0 )

```

```

Seed = test;

```

```

else

```

```

Seed = test + M;

```

```

return( Seed );
}

```

```

/*****
*****
* drand - returns a double pseudo random number between 0.0 and 1.0. *
* See irand.
*****
*****/

```

```

double drand()
{

```

```

#ifdef DEBUG
printf("[%d]DBG: Entering drand(...\n", (int) GetCurrentThreadId());
#endif

```

```

return( (double)irand() / 2147483647.0);
}

```

```

//=====
// Function : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%d]DBG: Entering RandomNumber()...\n", (int)
GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd
08-13-96 perf enhancement */

#ifdef DEBUG
    printf("[%d]DBG: RandomNumber between %d & %d ==> %d\n",
(int) GetCurrentThreadId(), lower,
upper, rand_num);
#endif

    return rand_num;
}

#if 0
//Original code pgd 08/13/96

long RandomNumber(long lower,
                    long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%d]DBG: Entering RandomNumber()...\n", (int)
GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper -
lower : upper);

#ifdef DEBUG
    printf("[%d]DBG: RandomNumber between %d & %d ==> %d\n",
(int) GetCurrentThreadId(), lower,
upper, rand_num);
#endif
#endif

```

```

        return rand_num;
    }
#endif

//=====
// Function : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%d]DBG: Entering NURand()...\n", (int) GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) %
(y-x+1))+x;

#ifdef DEBUG
    printf("[%d]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(),
rand_num);
#endif

    return rand_num;
}

```

## strings.c

```

// File: STRINGS.C
// Microsoft TPC-C Kit Ver. 4.22
// Copyright Microsoft, 1996, 1997,
1998, 1999, 2000, 2001
// Purpose: Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
//
// Function name: MakeAddress
//
//=====
void MakeAddress(char *street_1,
                char *street_2,
                char *city,
                char *state,
                char *zip)
{
#ifdef DEBUG
    printf("[%d]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

```

```

MakeAlphaString(10, 20, ADDRESS_LEN, street_1);
MakeAlphaString(10, 20, ADDRESS_LEN, street_2);
MakeAlphaString(10, 20, ADDRESS_LEN, city);
MakeAlphaString(2, 2, STATE_LEN, state);
MakeZipNumberString(9, 9, ZIP_LEN, zip);

#ifdef DEBUG
printf("[%d]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state:
%s, zip: %s\n",
        (int) GetCurrentThreadId(), street_1, street_2,
city, state, zip);
#endif

return;
}

//=====
//
// Function name: LastName
//
//=====

void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR", "OUGHT", "ABLE", "PRI", "PRES",
        "ESE", "ANTI", "CALLY", "ATION", "EING"
    };

#ifdef DEBUG
printf("[%d]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

if ((num >= 0) && (num < 1000))
{
    strcpy(name, n[(num/100)%10]);
    strcat(name, n[(num/10)%10]);
    strcat(name, n[(num/1)%10]);

    if (strlen(name) < LAST_NAME_LEN)
    {
        PaddString(LAST_NAME_LEN, name);
    }
}
else
{
    printf("\nError in LastName()... num <%d> out of range
(0,999)\n", num);
    exit(-1);
}

#ifdef DEBUG
printf("[%d]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
        (int) GetCurrentThreadId(), num, num/100,
(num/10)%10, num%10);
printf("[%d]DBG: LastName: String = %s\n", (int)
GetCurrentThreadId(), name);
#endif

return;

```

```

}

//=====
//
// Function name: MakeAlphaString
//
//=====

//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x,
maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a
minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
//--CLevine 08/13/96

int MakeAlphaString(int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
printf("[%d]DBG: Entering MakeAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    len = RandomNumber(x, y);

    for (i=0; i<len; i++)
    {
        cc = chArray[RandomNumber(0, chArrayMax)];
        str[i] = cc;
    }

    if (len < z)
        memset(str+len, ' ', z - len);
    str[len] = 0;

    return len;
}

//=====
//
// Function name: MakeOriginalAlphaString
//
//=====

int MakeOriginalAlphaString(int x,
                            int y,
                            int z,

```

```

char *str,
int percent)
{
    int    len;
    int    val;
    int    start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage:
%d\n", percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if ((x + y) <= 8)
    {
        printf("MakeOriginalAlphaString: string length must be
>= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strcpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
(int) GetCurrentThreadId(), str);
#endif

    return strlen(str);
}

=====
//
// Function name: MakeNumberString
//
=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16,
16, 16, string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));
}

```

```

str[16] = 0;

return 16;
}

=====
//
// Function name: MakeZipNumberString
//
=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9,
9, 9, string)

    strcpy(str, "000011111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

=====
//
// Function name: InitString
//
=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, '', len);
    str[len] = 0;
}

=====
//
// Function name: InitAddress
//
// Description:
//
=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char
*zip)
{
    memset(street_1, '', ADDRESS_LEN+1);
    memset(street_2, '', ADDRESS_LEN+1);
    memset(city, '', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;
}

```

```

        memset(state, '', STATE_LEN+1);
state[STATE_LEN+1] = 0;

        memset(zip, '', ZIP_LEN+1);
zip[ZIP_LEN+1] = 0;
}

//=====
//
// Function name: PaddString
//
//=====

void PaddString(int max, char *name)
{
    int        len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, '', max - len);
    name[max] = 0;

    return;
}

```

### time.c

```

//      File:          TIME.C
//
//      Microsoft TPC-C Kit Ver. 4.22
//      Copyright Microsoft, 1996, 1997,
1998, 1999, 2000, 2001
//      Purpose:   Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
//
// Function name: TimeNow
//
//=====

long TimeNow()
{
    long        time_now;
    struct      _timeb el_time;

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

### tpcc.h

```

//      File:          TPCC.H
//
//      Microsoft TPC-C Kit Ver. 4.22
//      Copyright Microsoft, 1996, 1997,
1998, 1999, 2000, 2001
//      Purpose:   Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER        "4.22"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbss.h>

// General constants
#define MILLI                1000
#define FALSE                0
#define TRUE                 1
#define UNDEF                -1
#define MINPRINTASCII       32
#define MAXPRINTASCII       126

// Default environment constants
#define SERVER                ""
#define DATABASE              "tpcc"
#define USER                  "sa"
#define PASSWORD              ""

// Default loader arguments
#define BATCH                 10000
#define DEFLDPACKSIZE        32768
#define LOADER_RES_FILE      "logs\load.out"
#define LOADER_NURAND_C      123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX          1
// build both data and indexes
#define INDEX_ORDER          1
// build indexes before load
#define SCALE_DOWN           0
// build a normal scale database
#define INDEX_SCRIPT_PATH    "scripts"

typedef struct
{
    char        *server;
    char        *database;
    char        *user;
    char        *password;
    BOOL        tables_all;
}

// set if loading all tables

```



```

        BOOL                                table_item;
// set if loading ITEM table specifically
        BOOL                                table_warehouse;
set if loading WAREHOUSE, DISTRICT, and STOCK
        BOOL                                table_customer;
// set if loading CUSTOMER and HISTORY
        BOOL                                table_orders;
// set if loading NEW-ORDER, ORDERS, ORDER-LINE
long      num_warehouses;
long      batch;
long      verbose;
        long      pack_size;
        char      *loader_res_file;
        char      *synch_servername;
        long      case_sensitivity;
        long      starting_warehouse;
        long      build_index;
        long      index_order;
        long      scale_down;
        char      *index_script_path;
} TPCCldr_ARGS;

// String length constants
#define SERVER_NAME_LEN      20
#define DATABASE_NAME_LEN   20
#define USER_NAME_LEN       20
#define PASSWORD_LEN        20
#define TABLE_NAME_LEN    20
#define I_DATA_LEN          50
#define I_NAME_LEN          24
#define BRAND_LEN           1
#define LAST_NAME_LEN       16
#define W_NAME_LEN          10
#define ADDRESS_LEN         20
#define STATE_LEN           2
#define ZIP_LEN              9
#define S_DIST_LEN          24
#define S_DATA_LEN          50
#define D_NAME_LEN          10
#define FIRST_NAME_LEN      16
#define MIDDLE_NAME_LEN     2
#define PHONE_LEN           16
#define CREDIT_LEN          2
#define C_DATA_LEN          500
#define H_DATA_LEN          24
#define DIST_INFO_LEN       24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN          25
#define OL_DIST_INFO_LEN    24
#define C_SINCE_LEN
23
#define H_DATE_LEN
23
#define OL_DELIVERY_D_LEN      23
#define O_ENTRY_D_LEN          23

// Functions in random.c
void      seed();
long      irand();
double    drand();
void      WUCreate();
short     WURand();
long      RandomNumber(long lower, long upper);

// Functions in getargs.c;
void      GetArgsLoader();

```

```

void      GetArgsLoaderUsage();
// Functions in time.c
long      TimeNow();
// Functions in strings.c
void      MakeAddress();
void      LastName();
int       MakeAlphaString();
int       MakeOriginalAlphaString();
int       MakeNumberString();
int       MakeZipNumberString();
void      InitString();
void      InitAddress();
void      PaddString();

```

### tpccldr.c

```

// File: TPCCLDR.C
// Microsoft TPC-C Kit Ver. 4.22
// Copyright Microsoft, 2000, 2001
// Purpose: Source file for TPC-C database loader

// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS      100000
#define MAXITEMS_SCALE_DOWN      100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);

void CheckSQL();
void CheckDataBase();

long NURand();
void LoadItem();
void LoadWarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();

```



```

//
//=====
//=====

int main(int argc, char **argv)
{
    DWORD      dwThreadID[MAX_MAIN_THREADS];
    HANDLE     hThread[MAX_MAIN_THREADS];
    FILE       *fLoader;
    char       buffer[255];
    int        i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");
    printf("\n*");
    printf("\n* Microsoft SQL Server");
    printf("\n*");
    printf("\n* TPC-C BENCHMARK KIT: Database loader");
    printf("\n* Version %s", TPCKIT_VER);
    printf("\n*");

    printf("\n*****\n");

    // process command line arguments

    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    // verify database and tables exist before attempting to load

    CheckSQL();
    CheckDataBase();

    printf("Build interface is ODBC.\n");

    if (aptr->build_index == 0)
        printf("Data load only - no index creation.\n");
    else
        printf("Data load and index creation.\n");

    if (aptr->index_order == 0)
        printf("Clustered indexes will be created after bulk
load.\n");
    else
        printf("Clustered indexes will be created before bulk
load.\n");

    // set database scale values
    if (aptr->scale_down == 1)
    {
        printf("*** Scaled Down Database ***\n");
        max_items = MAXITEMS_SCALE_DOWN;
        customers_per_district =
CUSTOMERS_SCALE_DOWN;
        orders_per_district = ORDERS_SCALE_DOWN;
        first_new_order = 0;
        last_new_order = 30;
    }
    else
    {
        max_items = MAXITEMS;
        customers_per_district =
CUSTOMERS_PER_DISTRICT;
        orders_per_district = ORDERS_PER_DISTRICT;
        first_new_order = 2100;

        last_new_order = 3000;
    }

    // open connections to SQL Server

    OpenConnections();

    // open file for loader results
    fLoader = fopen(aptr->loader_res_file, "w");

    if (fLoader == NULL)
    {
        printf("Error, loader result file open failed.");
        exit(-1);
    }

    // start loading data

    sprintf(buffer, "TPC-C load started for %ld
warehouses.\n", aptr->num_warehouses);

    printf("%s", buffer);
    fprintf(fLoader, "%s", buffer);

    main_time_start = (TimeNow() / MILLI);

    // start parallel load threads

    if (aptr->tables_all || aptr->table_item)
    {
        fprintf(fLoader, "\nStarting loader threads for: item\n");

        hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadItem,
NULL,
0,
&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating thread
= 0.\n");
            exit(-1);
        }

        if (aptr->tables_all || aptr->table_warehouse)
        {
            fprintf(fLoader, "Starting loader threads for:
warehouse\n");

            hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadWarehouse,
NULL,
0,

```

```

&dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread
= 1.\n");
            exit(-1);
        }
    }
    if (aptr->tables_all || aptr->table_customer)
    {
        fprintf(fLoader, "Starting loader threads for:
customer\n");
        hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomer,
NULL,
0,
&dwThreadID[2]);
        if (hThread[2] == NULL)
        {
            printf("Error, failed in creating creating main
thread = 2.\n");
            exit(-1);
        }
    }
    if (aptr->tables_all || aptr->table_orders)
    {
        fprintf(fLoader, "Starting loader threads for: orders\n");
        hThread[3] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrders,
NULL,
0,
&dwThreadID[3]);
        if (hThread[3] == NULL)
        {
            printf("Error, failed in creating creating main
thread = 3.\n");
            exit(-1);
        }
    }
    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject( hThread[i], INFINITE
);
            CloseHandle(hThread[i]);

```

```

        hThread[i] = NULL;
    }
    }
    main_time_end = (TimeNow() / MILLI);
    sprintf(buffer, "\nTPC-C load completed successfully in %ld minutes.\n",
(main_time_end - main_time_start)/60);
    printf("%s", buffer);
    fprintf(fLoader, "%s", buffer);
    fclose(fLoader);
    SQLFreeEnv(henv);
    exit(0);
    return 0;
}
//=====
//
// Function name: LoadItem
//
//=====
void LoadItem()
{
    long        i_id;
    long        i_im_id;
    char        i_name[I_NAME_LEN+1];
    double      i_price;
    char        i_data[I_DATA_LEN+1];
    char        name[20];
    long        time_start;
    RETCODE     rc;
    DBINT      rcint;
    char        bcphint[128];
    // Seed with unique number
    seed(1);
    printf("Loading item table...\n");
    // if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitmc1");
    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);
    sprintf(name, "%s..%s", aptr->database, "item");
    rc = bcp_init(i_hdbc1, name, NULL, "logs\\item.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (i_id,
ROWS_PER_BATCH = 100000");
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(i_hdbc1);
    }
}

```

```

    }

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN,
NULL, 0, 0, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, I_DATA_LEN, NULL,
0, 0, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    time_start = (TimeNow() / MILLI);

    item_rows_loaded = 0;

    for (i_id = 1; i_id <= max_items; i_id++)
    {
        i_im_id = RandomNumber(1L, 10000L);

        MakeAlphaString(14, 24, I_NAME_LEN, i_name);

        i_price = ((float) RandomNumber(100L, 10000L))/100.0;

        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data,
10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded,
"item", &time_start);
    }

    rcint = bcp_done(i_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmcl");
}

```

```

//=====
//=====
// Function : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are
// created
//=====
//=====

void LoadWarehouse()
{
    short   w_id;
    char    w_name[W_NAME_LEN+1];
    char    w_street_1[ADDRESS_LEN+1];
    char    w_street_2[ADDRESS_LEN+1];
    char    w_city[ADDRESS_LEN+1];
    char    w_state[STATE_LEN+1];
    char    w_zip[ZIP_LEN+1];
    double  w_tax;
    double  w_ytd;
    char    name[20];
    long    time_start;
    RETCODE rc;
    DBINT   rcint;
    char    bcphint[128];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxwardl");

    InitString(w_name, W_NAME_LEN+1);
    InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

    sprintf(name, "%s..%s", aptr->database, "warehouse");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\whouse.err", DB_IN);

    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (w_id,
ROWS_PER_BATCH = %d", aptr->num_warehouses);
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*)
bcphint);

        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN,
NULL, 0, 0, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN,
NULL, 0, 0, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN,
NULL, 0, 0, 4);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN,
NULL, 0, 0, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN,
NULL, 0, 0, 6);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0,
7);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 8);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 9);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (short)aptr->starting_warehouse; w_id <=
aptr->num_warehouses; w_id++)
{
    MakeAlphaString(6,10, W_NAME_LEN, w_name);

    MakeAddress(w_street_1, w_street_2, w_city, w_state,
w_zip);

    w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

    w_ytd = 300000.00;

    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstmt1,
warehouse_rows_loaded, "warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))

BuildIndex("idxwarc1");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();
}

//=====
//
// Function : District
//
//=====

void District()
{
    short d_id;
    short d_w_id;
    char d_name[D_NAME_LEN+1];
    char d_street_1[ADDRESS_LEN+1];
    char d_street_2[ADDRESS_LEN+1];
    char d_city[ADDRESS_LEN+1];
    char d_state[STATE_LEN+1];
    char d_zip[ZIP_LEN+1];
    double d_tax;
    double d_ytd;
    char name[20];
    long d_next_o_id;
    long time_start;
    int w_id;
    RETCODE rc;
    DBINT rcint;
    char bcpint[128];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
    sprintf(name, "%s..%s", aptr->database, "district");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\district.err", DB_IN);

    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcpint, "tablock, order (d_w_id, d_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 10));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*)
bcpint);

        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);
    }
}

```

```

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN,
NULL, 0, 0, 3);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN,
NULL, 0, 0, 4);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN,
NULL, 0, 0, 5);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN,
NULL, 0, 0, 6);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL,
0, 0, 7);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0,
8);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 9);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 10);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 11);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        d_ytd = 30000.0;

        d_next_o_id = orders_per_district+1;

        time_start = (TimeNow() / MILLI);

        for (w_id = apr->starting_warehouse; w_id <=
apr->num_warehouses; w_id++)
        {
            d_w_id = w_id;

            for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE;
d_id++)

```

```

        {
            MakeAlphaString(6,10,D_NAME_LEN,
d_name);

            MakeAddress(d_street_1, d_street_2, d_city,
d_state, d_zip);

            d_tax = ((float)
RandomNumber(0L,2000L))/10000.00;

            rc = bcp_sendrow(w_hdbc1);
            if (rc != SUCCEED)
                HandleErrorDBC(w_hdbc1);

            district_rows_loaded++;
            CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
        }
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading district table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxdiscl");

    return;
}

//=====
//
// Function : Stock
//
//=====

void Stock()
{
    long   s_i_id;
    short  s_w_id;
    short  s_quantity;
    char   s_dist_01[S_DIST_LEN+1];
    char   s_dist_02[S_DIST_LEN+1];
    char   s_dist_03[S_DIST_LEN+1];
    char   s_dist_04[S_DIST_LEN+1];
    char   s_dist_05[S_DIST_LEN+1];
    char   s_dist_06[S_DIST_LEN+1];
    char   s_dist_07[S_DIST_LEN+1];
    char   s_dist_08[S_DIST_LEN+1];
    char   s_dist_09[S_DIST_LEN+1];
    char   s_dist_10[S_DIST_LEN+1];
    long   s_ytd;
    short  s_order_cnt;
    short  s_remote_cnt;
    char   s_data[S_DATA_LEN+1];
    short  len;
    char   name[20];
    long   time_start;
    RETCODE rc;
    DBINT  rcint;
    char   bcphint[128];

```

```

// Seed with unique number
seed(3);

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxstkcl");

sprintf(name, "%s.%s", aptr->database, "stock");

rc = bcp_init(w_hdbc1, name, NULL, "logs\\stock.err", DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcpint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*)
bcpint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN,
NULL, 0, 0, 4);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN,
NULL, 0, 0, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN,
NULL, 0, 0, 6);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN,
NULL, 0, 0, 7);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN,
NULL, 0, 0, 8);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN,
NULL, 0, 0, 9);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN,
NULL, 0, 0, 10);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN,
NULL, 0, 0, 11);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN,
NULL, 0, 0, 12);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN,
NULL, 0, 0, 13);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 14);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 15);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 16);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, S_DATA_LEN,
NULL, 0, 0, 17);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;

time_start = (TimeNow() / MILLI);

printf("...Loading stock table\n");

for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (short)aptr->starting_warehouse; s_w_id
<= aptr->num_warehouses; s_w_id++)
    {
        s_quantity =
(short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_06);
    }
}

```





```

        hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
0,
&dwThreadID[0]);

if (hThread[0] == NULL)
{
    printf("Error, failed in creating
creating thread = 0.\n");
    exit(-1);
}

// Start History table thread
printf("...Loading history table for: d_id = %d,
w_id = %d\n", d_id, w_id);

hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
0,
&dwThreadID[1]);

if (hThread[1] == NULL)
{
    printf("Error, failed in creating
creating thread = 1.\n");
    exit(-1);
}

WaitForSingleObject( hThread[0], INFINITE
);
WaitForSingleObject( hThread[1], INFINITE
);

if (CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in closing
customer thread handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing
history thread handle with errno: %d\n", GetLastError());
}

}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);

```

```

if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxcuscl");

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID
= 1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "isql -S%s -U%s -P%s -d%s -e -Q"update customer set
c_first = 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1" >
logs\nurand_load.log",
        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database,
        LOADER_NURAND_C);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
//
// Function : CustomerBufInit
//
//=====

void CustomerBufInit()
{
    int i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
    }
}

```

```

strcpy(customer_buf[i].c_city,"");
strcpy(customer_buf[i].c_state,"");
strcpy(customer_buf[i].c_zip,"");
strcpy(customer_buf[i].c_phone,"");
strcpy(customer_buf[i].c_credit,"");

customer_buf[i].c_credit_lim = 0;
customer_buf[i].c_discount = (float) 0;

// fix to avoid ODBC float to numeric conversion
problem.
//      customer_buf[i].c_balance = 0;
strcpy(customer_buf[i].c_balance,"");

customer_buf[i].c_ytd_payment = 0;
customer_buf[i].c_payment_cnt = 0;
customer_buf[i].c_delivery_cnt = 0;

strcpy(customer_buf[i].c_data,"");

customer_buf[i].h_amount = 0;

strcpy(customer_buf[i].h_data,"");
    }
}

//=====
//
// Function : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====

void CustomerBufLoad(int d_id, int w_id)
{
    long                i;
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C), c[i].c_last);

        MakeAlphaString(8,16,FIRST_NAME_LEN,
c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
        d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;

```

```

customer_buf[i].h_amount = 10.0;

customer_buf[i].c_ytd_payment = 10.0;

customer_buf[i].c_payment_cnt = 1;
customer_buf[i].c_delivery_cnt = 0;

// Generate CUSTOMER and HISTORY data

customer_buf[i].c_id = c[i].c_id;

strcpy(customer_buf[i].c_first, c[i].c_first);
strcpy(customer_buf[i].c_last, c[i].c_last);

customer_buf[i].c_middle[0] = 'O';
customer_buf[i].c_middle[1] = 'E';

MakeAddress(customer_buf[i].c_street_1,
            customer_buf[i].c_street_2,
            customer_buf[i].c_city,
            customer_buf[i].c_state,
            customer_buf[i].c_zip);

MakeNumberString(16, 16, PHONE_LEN,
customer_buf[i].c_phone);

if (RandomNumber(1L, 100L) > 10)
    customer_buf[i].c_credit[0] = 'G';
else
    customer_buf[i].c_credit[0] = 'B';
customer_buf[i].c_credit[1] = 'C';

customer_buf[i].c_credit_lim = 50000.0;
customer_buf[i].c_discount = ((float)
RandomNumber(0L, 5000L)) / 10000.0;

// fix to avoid ODBC float to numeric conversion
problem.
// customer_buf[i].c_balance = -10.0;
strcpy(customer_buf[i].c_balance,"-10.0");

MakeAlphaString(300, 500, C_DATA_LEN,
customer_buf[i].c_data);

// Generate HISTORY data
MakeAlphaString(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
    }
}

//=====
//
// Function : LoadCustomerTable
//
//=====

void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    int                i;
    long               c_id;
    short              c_d_id;
    short              c_w_id;
    char               c_first[FIRST_NAME_LEN+1];
    char               c_middle[MIDDLE_NAME_LEN+1];
    char               c_last[LAST_NAME_LEN+1];

```

<pre> char    c_street_1[ADDRESS_LEN+1]; char    c_street_2[ADDRESS_LEN+1]; char    c_city[ADDRESS_LEN+1]; char    c_state[STATE_LEN+1]; char    c_zip[ZIP_LEN+1]; char    c_phone[PHONE_LEN+1]; char    c_credit[CREDIT_LEN+1]; double  c_credit_lim; double  c_discount;  // fix to avoid ODBC float to numeric conversion problem. // double      c_balance; char        c_balance[6];  double    c_ytd_payment; short     c_payment_cnt; short     c_delivery_cnt; char      c_data[C_DATA_LEN+1]; char      c_since[C_SINCE_LEN+1]; RETCODE   rc;  rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0, 4); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0, 5); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, 6); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, 7); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, 8); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, 9); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, 10); if (rc != SUCCEEDED) </pre>	<pre>     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, 11); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, 12); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_since, 0, C_SINCE_LEN, NULL, 0, SQLCHARACTER, 13); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0, 14); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 15); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_discount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 16); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  // fix to avoid ODBC float to numeric conversion problem.  // rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_balance, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 17); // if (rc != SUCCEEDED) //     HandleErrorDBC(c_hdbc1); rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, 17); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 18); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 19); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) &amp;c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 20); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500, NULL, 0, 0, 21); if (rc != SUCCEEDED)     HandleErrorDBC(c_hdbc1);  for (i = 0; i &lt; customers_per_district; i++) {     c_id = customer_buf[i].c_id;     c_d_id = customer_buf[i].c_d_id;     c_w_id = customer_buf[i].c_w_id; </pre>
---	---

```

strcpy(c_first, customer_buf[i].c_first);
strcpy(c_middle, customer_buf[i].c_middle);
strcpy(c_last, customer_buf[i].c_last);
strcpy(c_street_1, customer_buf[i].c_street_1);
strcpy(c_street_2, customer_buf[i].c_street_2);
strcpy(c_city, customer_buf[i].c_city);
strcpy(c_state, customer_buf[i].c_state);
strcpy(c_zip, customer_buf[i].c_zip);
strcpy(c_phone, customer_buf[i].c_phone);
strcpy(c_credit, customer_buf[i].c_credit);

FormatDate(&c_since);

c_credit_lim = customer_buf[i].c_credit_lim;
c_discount = customer_buf[i].c_discount;

// fix to avoid ODBC float to numeric conversion
// c_balance = customer_buf[i].c_balance;
strcpy(c_balance, customer_buf[i].c_balance);

c_ytd_payment = customer_buf[i].c_ytd_payment;
c_payment_cnt = customer_buf[i].c_payment_cnt;
c_delivery_cnt = customer_buf[i].c_delivery_cnt;

strcpy(c_data, customer_buf[i].c_data);

// Send data to server
rc = bcp_sendrow(c_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

customer_rows_loaded++;
CheckForCommit(c_hdbc1, c_hstmt1,
customer_rows_loaded, "customer", &customer_time_start->time_start);
}
}

//=====
//
// Function : LoadHistoryTable
//
//=====

void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    int i;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);

```

```

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN,
NULL, 0, SQLCHARACTER, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0,
8);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);

        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2,
history_rows_loaded, "history", &history_time_start->time_start);
    }
}

//=====
//
// Function : LoadOrders
//
//=====

void LoadOrders()
{
    LOADER_TIME_STRUCT orders_time_start;
    LOADER_TIME_STRUCT new_order_time_start;

```

```

        LOADER_TIME_STRUCT  order_line_time_start;
        short               w_id;
    short   d_id;
        DWORD
dwThreadID[MAX_ORDER_THREADS];
        HANDLE
hThread[MAX_ORDER_THREADS];
        char               name[20];
        RETCODE
rc;
        char
bcpHint[128];

        // seed with unique number
        seed(6);

        printf("Loading orders...\n");

        // if build index before load...
        if ((aptr->build_index == 1) && (aptr->index_order == 1))
        {
                BuildIndex("idxordcl");
                BuildIndex("idxnodcl");
                BuildIndex("idxodcl");
        }

        // initialize bulk copy
        sprintf(name, "%s..%s", aptr->database, "orders");

        rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
        if (rc != SUCCEEDED)
                HandleErrorDBC(o_hdbc1);

        if ((aptr->build_index == 1) && (aptr->index_order == 1))
        {
                sprintf(bcpHint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
                rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcpHint);

                if (rc != SUCCEEDED)
                        HandleErrorDBC(o_hdbc1);
        }

        sprintf(name, "%s..%s", aptr->database, "new_order");

        rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
        if (rc != SUCCEEDED)
                HandleErrorDBC(o_hdbc2);

        if ((aptr->build_index == 1) && (aptr->index_order == 1))
        {
                sprintf(bcpHint, "tablock, order (no_w_id, no_d_id,
no_o_id), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
                rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcpHint);

                if (rc != SUCCEEDED)
                        HandleErrorDBC(o_hdbc2);
        }

        sprintf(name, "%s..%s", aptr->database, "order_line");

        rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);

        if (rc != SUCCEEDED)
                HandleErrorDBC(o_hdbc3);

        if ((aptr->build_index == 1) && (aptr->index_order == 1))
                {
                        sprintf(bcpHint, "tablock, order (ol_w_id, ol_d_id,
ol_o_id, ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses *
300000));
                        rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcpHint);

                        if (rc != SUCCEEDED)
                                HandleErrorDBC(o_hdbc3);
                }

                orders_rows_loaded = 0;
                new_order_rows_loaded = 0;
                order_line_rows_loaded = 0;

                OrdersBufInit();

                orders_time_start.time_start = (TimeNow() / MILLI);
                new_order_time_start.time_start = (TimeNow() / MILLI);
                order_line_time_start.time_start = (TimeNow() / MILLI);

                for (w_id = (short)aptr->starting_warehouse; w_id <=
aptr->num_warehouses; w_id++)
                {
                        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE;
d_id++)
                                {
                                        OrdersBufLoad(d_id, w_id);

                                        // start parallel loading threads here...

                                        // start Orders table thread

                                        printf("...Loading Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

                                        hThread[0] = CreateThread(NULL,

                                                0,

                                                (LPTHREAD_START_ROUTINE) LoadOrdersTable,

                                                &orders_time_start,

                                                0,

                                                &dwThreadID[0]);

                                        if (hThread[0] == NULL)
                                        {
                                                printf("Error, failed in creating
creating thread = 0.\n");
                                                exit(-1);
                                        }

                                        // start NewOrder table thread

                                        printf("...Loading New-Order Table for: d_id
= %d, w_id = %d\n", d_id, w_id);

                                        hThread[1] = CreateThread(NULL,

                                                0,

                                                (LPTHREAD_START_ROUTINE) LoadNewOrderTable,

                                                &new_order_time_start,

```

```

0,
&dwThreadID[1]);
    if (hThread[1] == NULL)
    {
        printf("Error, failed in creating
creating thread = 1.\n");
        exit(-1);
    }
    // start Order-Line table thread
    printf("...Loading Order-Line Table for: d_id
= %d, w_id = %d\n", d_id, w_id);
    hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadID[2]);
    if (hThread[2] == NULL)
    {
        printf("Error, failed in creating
creating thread = 2.\n");
        exit(-1);
    }
    WaitForSingleObject( hThread[0], INFINITE
);
    WaitForSingleObject( hThread[1], INFINITE
);
    WaitForSingleObject( hThread[2], INFINITE
);
    if (CloseHandle(hThread[0]) == FALSE)
    {
        printf("Error, failed in closing
Orders thread handle with errno: %d\n", GetLastError());
    }
    if (CloseHandle(hThread[1]) == FALSE)
    {
        printf("Error, failed in closing
NewOrder thread handle with errno: %d\n", GetLastError());
    }
    if (CloseHandle(hThread[2]) == FALSE)
    {
        printf("Error, failed in closing
OrderLine thread handle with errno: %d\n", GetLastError());
    }
}
printf("Finished loading orders.\n");
return;

```

```

}
//=====
//
// Function : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufInit()
{
    int i;
    int j;
    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o_ol_cnt = 0;
        orders_buf[i].o_all_local = 0;
        for (j=0;j<=14;j++)
        {
            orders_buf[i].o_ol[j].ol = 0;
            orders_buf[i].o_ol[j].ol_i_id = 0;
            orders_buf[i].o_ol[j].ol_supply_w_id = 0;
            orders_buf[i].o_ol[j].ol_quantity = 0;
            orders_buf[i].o_ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o_ol[j].ol_dist_info, "");
        }
    }
}
//=====
//
// Function : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufLoad(int d_id, int w_id)
{
    int cust[ORDERS_PER_DISTRICT+1];
    long o_id;
    short ol;
    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
d_id, w_id);
    GetPermutation(cust, orders_per_district);
    for (o_id=0;o_id<orders_per_district;o_id++)
    {

```

```

// Generate ORDER and NEW-ORDER data

orders_buf[o_id].o_d_id = d_id;
orders_buf[o_id].o_w_id = w_id;
orders_buf[o_id].o_id = o_id+1;
orders_buf[o_id].o_c_id = cust[o_id+1];
orders_buf[o_id].o_ol_cnt = (short)RandomNumber(5L,
15L);

if (o_id < first_new_order)
{
    orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);
    orders_buf[o_id].o_all_local = 1;
}
else
{
    orders_buf[o_id].o_carrier_id = 0;
    orders_buf[o_id].o_all_local = 1;
}

for (ol=0; ol<orders_buf[o_id].o_ol_cnt; ol++)
{
    orders_buf[o_id].o_ol[ol].ol = ol+1;
    orders_buf[o_id].o_ol[ol].ol_i_id =
RandomNumber(1L, max_items);
    orders_buf[o_id].o_ol[ol].ol_supply_w_id =
w_id;
    orders_buf[o_id].o_ol[ol].ol_quantity = 5;
    MakeAlphaString(24, 24,
OL_DIST_INFO_LEN, &orders_buf[o_id].o_ol[ol].ol_dist_info);

    // Generate ORDER-LINE data
    if (o_id < first_new_order)
    {
        orders_buf[o_id].o_ol[ol].ol_amount = 0;
        // Added to insure ol_delivery_d
        set properly during load

        FormatDate(&orders_buf[o_id].o_ol[ol].ol_delivery_d);
    }
    else
    {
        orders_buf[o_id].o_ol[ol].ol_amount = RandomNumber(1,999999)/100.0;
        // Added to insure ol_delivery_d
        set properly during load

        // odbc datetime format
        strepy(orders_buf[o_id].o_ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
    }
}
}

//=====
//

```

```

// Function : LoadOrdersTable
//
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int i;
    long o_id;
    short o_d_id;
    short o_w_id;

    long o_c_id;
    short o_carrier_id;
    short o_ol_cnt;
    short o_all_local;
    char o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc;
    DBINT rcint;

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0,
O_ENTRY_D_LEN, NULL, 0, SQLCHARACTER, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;
        o_c_id = orders_buf[i].o_c_id;
        o_carrier_id = orders_buf[i].o_carrier_id;
        o_ol_cnt = orders_buf[i].o_ol_cnt;
    }
}

```



```

o_all_local = orders_buf[i].o_all_local;

FormatDate(&o_entry_d);

// send data to server
rc = bcp_sendrow(o_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

orders_rows_loaded++;
CheckForCommit(o_hdbc1, o_hstmt1,
orders_rows_loaded, "orders", &orders_time_start->time_start);
}

// rcint = bcp_batch(o_hdbc1);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc1);

if ((o_w_id == apr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order ==
0))

        BuildIndex("idxordcl");

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxordnc");
}
}

//=====
//
// Function : LoadNewOrderTable
//
//=====

void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    int    i;
    long   o_id;
    short  o_d_id;
    short  o_w_id;
    RETCODE          rc;
    DBINT          rcint;

    // Bind NEW-ORDER data

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)

```

```

HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;
        CheckForCommit(o_hdbc2, o_hstmt2,
new_order_rows_loaded, "new_order", &new_order_time_start->time_start);
    }

    // rcint = bcp_batch(o_hdbc2);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc2);

    if ((o_w_id == apr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order ==
0))

            BuildIndex("idxnodcl");
    }
}

//=====
//
// Function : LoadOrderLineTable
//
//=====

void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    int    i,j;
    long   o_id;
    short  o_d_id;
    short  o_w_id;

    long   ol;
    long   ol_i_id;
    short  ol_supply_w_id;
    short  ol_quantity;
    double ol_amount;
    char   ol_dist_info[DIST_INFO_LEN+1];
    char   ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE          rc;

```

```

DBINT          rcint;

// bind ORDER-LINE data
rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 1);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 4);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 6);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0,
OL_DELIVERY_D_LEN, NULL, 0, SQLCHARACTER, 7);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 9);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN,
NULL, 0, 0, 10);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

for (i = 0; i < orders_per_district; i++)
{
    o_id = orders_buf[i].o_id;
    o_d_id = orders_buf[i].o_d_id;
    o_w_id = orders_buf[i].o_w_id;

    for (j=0; j < orders_buf[i].ol_cnt; j++)
    {
        ol = orders_buf[i].ol[j].ol;
        ol_i_id = orders_buf[i].ol[j].ol_i_id;
        ol_supply_w_id =
orders_buf[i].ol_supply_w_id;
        ol_quantity =
orders_buf[i].ol_quantity;

```

```

        ol_amount =
orders_buf[i].ol[j].ol_amount;
strcpy(ol_delivery_d, orders_buf[i].ol_delivery_d);

strcpy(ol_dist_info, orders_buf[i].ol_dist_info);

rc = bcp_sendrow(o_hdbc3);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

    order_line_rows_loaded++;
    CheckForCommit(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
    }

}

// rcint = bcp_batch(o_hdbc3);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc3);

if ((o_w_id == apr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc3);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc3);

    SQLFreeStmt(o_hstmt3, SQL_DROP);
    SQLDisconnect(o_hdbc3);
    SQLFreeConnect(o_hdbc3);

    // if build index after load...
    if ((apr->build_index == 1) && (apr->index_order ==
0))
        BuildIndex("idxodcl");
}

}

//=====
//
// Function : GetPermutation
//
//=====

void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1; i<=n; i++)
        perm[i] = i;

    for (i=1; i<=n; i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

```

```

//=====
//
// Function : CheckForCommit
//
//=====
void CheckForCommit(HDBC hdbc,
                   HSTMT hstmt,
                   int rows_loaded,
                   char *table_name,
                   long *time_start)
{
    long time_end, time_diff;
    // DBINT rcint;

    if ( !(rows_loaded % aptr->batch) )
    {
        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("> Loaded %ld rows into %s in %ld sec - Total =
%d (%.2f rps)\n",
            aptr->batch,
            table_name,
            time_diff,
            rows_loaded,
            (float) aptr->batch / (time_diff ?
time_diff : 1L));

        *time_start = time_end;
    }
    return;
}

```

```

//=====
//
// Function : OpenConnections
//
//=====

```

```

void OpenConnections()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
    &henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
    (void*)SQL_OV_ODBC3, 0 );

```

```

SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );

// Open connections to SQL Server

// Connection 1

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE,
aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = SQLDriverConnect ( i_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

// Connection 2

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,

```



```

aptr->server,

aptr->password,

aptr->database );

        rc = SQLSetConnectOption ( o_hdbc2, SQL_PACKET_SIZE,
aptr->pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        rc = SQLDriverConnect ( o_hdbc2,

NULL,

(SQLCHAR*)&szDriverString[0] ,

SQL_NTS,

(SQLCHAR*)&szDriverStringOut[0],

sizeof(szDriverStringOut),

&cbDriverStringOut,

SQL_DRIVER_NOPROMPT );
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        // Connection 7

        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

aptr->server,

aptr->password,

aptr->database );

        rc = SQLSetConnectOption ( o_hdbc3, SQL_PACKET_SIZE,
aptr->pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = SQLDriverConnect ( o_hdbc3,

NULL,

(SQLCHAR*)&szDriverString[0] ,

SQL_NTS,

(SQLCHAR*)&szDriverStringOut[0],

sizeof(szDriverStringOut),

&cbDriverStringOut,

SQL_DRIVER_NOPROMPT );
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
}

```

aptr->user,

aptr->user,

```

//=====
//
// Function name: BuildIndex
//
//=====

void BuildIndex(char *index_script)
{
    char    cmd[256];

    printf("Starting index creation: %s\n",index_script);

    sprintf(cmd, "isql -S%s -U%s -P%s -e -i%s\\%s.sql > logs\\%s.log",
aptr->server,
aptr->user,
aptr->password,
aptr->index_script_path,
index_script,
index_script);

    system(cmd);

    printf("Finished index creation: %s\n",index_script);
}

void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR                SqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN rc2;
    char timebuf[128];
    char datebuf[128];
    FILE *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i,
SqlState , &NativeError,
Msg, sizeof(Msg) , &MsgLen )
!= SQL_NO_DATA )
    {

        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog
file.\n");

        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf,
timebuf, szLastError);
            fclose(fp1);
        }

        i++;
    }
}

```

```

}

void HandleErrorSTMT (HSTMT hstmt1)
{
    SQLCHAR          SqlState[6],
    Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN rc2;
    char             timebuf[128];
    char             datebuf[128];
    FILE             *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i,
    SqlState , &NativeError,
    Msg, sizeof(Msg) , &MsgLen )
    != SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpcldr.err", "w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog
file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf,
timebuf, szLastError);
            fclose(fp1);
        }

        i++;
    }
}

void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000",
&when );

    return;
}

//=====
//
// Function : CheckSQL

```

```

//
//=====
//=====

void CheckSQL()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    int SQLBuildFlag;
    char resp;

    SQLSMALLINT cbDriverStringOut;
    SQLCHAR SQLVersion[19];
    SQLINTEGER SQLVersionInd;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
(void*)SQL_OV_ODBC3, 0);

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &v_hdbc);

    SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );

    // Open connection to SQL Server
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s" ,
aptr->server,
aptr->user,
aptr->password );

    if ( SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE,
(SQLPOINTER)aptr->pack_size, SQL_IS_UINTEGER ) != SQL_SUCCESS )
        HandleErrorDBC(v_hdbc);

    rc = SQLDriverConnect ( v_hdbc,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

    if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
        HandleErrorDBC(v_hdbc);

    if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt)
!= SQL_SUCCESS )
        HandleErrorSTMT(v_hstmt);

```

```

        rc = SQLBindCol(v_hstmt, 4, SQL_C_CHAR, &SQLVersion,
sizeof(SQLVersion), &SQLVersionInd);

        // issue SQL Server extended stored procedure (xp_msver) to
determine installed version
        rc = SQLExecDirect(v_hstmt, "EXECUTE xp_msver
ProductVersion", SQL_NTS);

        if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
            HandleErrorSTMT(v_hstmt);

        rc = SQLFetch(v_hstmt);

        if (rc != SQL_SUCCESS)
            HandleErrorDBC(v_hdbc);

        // Check build number to ensure 8.00.194 or higher
        SQLBuildFlag = 1;

        // first check the Major version
        if ( SQLVersion[0] == '8' )
        {
            if (( SQLVersion[2] == '0') & ( SQLVersion[3] == '0' ) )
            {
                if ( SQLVersion[5] == '1' )
                {
                    if ( (SQLVersion[6] == '9') &
(SQLVersion[7] == '4') )
                    {
                        SQLBuildFlag = 0;
                        printf("You are using
SQL Server version = %9s\n\n", SQLVersion);
                    }
                    else
                    {
                        SQLBuildFlag = 1;
                    }
                }
                else
                {
                    if ( SQLVersion[5] == '3' )
                    {
                        if ( (SQLVersion[6] >=
53) & (SQLVersion[7] >= 48) )
                        {
                            SQLBuildFlag = 0;
                            printf("You
are using SQL Server version = %9s\n\n", SQLVersion);
                        }
                        else
                        {
                            SQLBuildFlag = 1;
                        }
                    }
                }
            }
        }
        else
        {
            SQLBuildFlag = 1;
        }
    }
    if ( SQLBuildFlag == 1 )

```

```

    {
        printf("NOTE: The SQL Server version you are using is
not supported\n");
        printf("for TPC-C benchmarking. You currently have
SQL Server version %9s\n",SQLVersion);
        printf("installed. Please upgrade to Microsoft SQL
Server 2000 (8.00.0194) or better.\n");
        printf("and re-run the SETUP program.\n\n");
        printf("Do you wish to continue with setup? (Y/N): ");
        resp = getchar();
        if ( ( resp == 'N' ) || (resp == 'n') )
        {
            printf("\nSetup Aborted!\n");
            exit(1);
        }
    }

    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    return;
}

//=====
//
// Function : CheckDataBase
//=====

void CheckDataBase()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    char TablesBitMap[9] =
{"000000000"};
    int i, ExitFlag;

    SQLSMALLINT cbDriverStringOut;
    SQLCHAR TabName[10];
    SQLINTEGER TabNameInd, TabCount,
TabCountInd;

    ExitFlag = 0;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
(void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv, &v_hdbc);

    SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );

    // Open connection to SQL Server

    sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",

```

```

aptr->server,
aptr->password,
aptr->database );

rc = SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE,
(SQLPOINTER)aptr->pack_size, SQL_IS_UIINTEGER );
if (rc != SQL_SUCCESS)
    HandleErrorDBC(v_hdbc);

rc = SQLDriverConnect ( v_hdbc,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
                        SQL_NTS,
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

// if the rc is SQL_ERROR, the the TPCC database probably does
not exist
if (rc == SQL_ERROR)
{
    printf("The database TPCC does not appear to exist!\n");
    printf("\nCheck LOGS\ directory for database creation
errors.\n");

    // cleanup database connections and handles
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    // since there is not a database, exit back to SETUP.CMD
    exit(1);
}

if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt)
!= SQL_SUCCESS )
    HandleErrorDBC(v_hdbc);

if ( SQLBindCol(v_hstmt, 1, SQL_C_ULONG, &TabCount, 0,
&TabCountInd) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// count the number of user tables from sysobjects
rc = SQLExecDirect(v_hstmt, "select count(*) from sysobjects
where xtype = 'U'", SQL_NTS);
if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
    HandleErrorSTMT(v_hstmt);

if ( SQLFetch(v_hstmt) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// if the number of tables is less than 9, select all the user tables in
TPCC
if (TabCount != 9)
{
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);

```

```

SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc ,
&v_hstmt);

if ( SQLBindCol(v_hstmt, 1, SQL_C_CHAR,
&TabName, sizeof(TabName), &TabNameInd) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// select the list of user tables into a result set
rc = SQLExecDirect(v_hstmt, "select * from sysobjects
where xtype = 'U'", SQL_NTS);
if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
    HandleErrorSTMT(v_hstmt);

// go through the result set and set the bitmap for each
found table
// set the bitmap to '1' if the table name is found
while ((rc = SQLFetch(v_hstmt)) != SQL_NO_DATA)
{
    switch( TabName[0] )
    {
        case 'w':
            TablesBitMap[0] = '1';
            break;
        case 'd':
            TablesBitMap[1] = '1';
            break;
        case 'c':
            TablesBitMap[2] = '1';
            break;
        case 'h':
            TablesBitMap[3] = '1';
            break;
        case 'n':
            TablesBitMap[4] = '1';
            break;
        case 'o':
            if (TabName[5] = 's')
                TablesBitMap[5] = '1';
            if (TabName[5] = '_')
                TablesBitMap[6] = '1';
            break;
        case 't':
            TablesBitMap[7] = '1';
            break;
        case 's':
            TablesBitMap[8] = '1';
            break;
    }
}

// a '0' ExitFlag means do NOT exit the loader early, a '1'
means exit the loader early
ExitFlag = 0;

// iterate through the bitmap to display which table(s) is
actually missing
for (i = 0; i <= 8; i++)
{
    switch(i)
    {
        case 0:
            if (TablesBitMap[i] == '0')
            {
                printf("The Warehouse
table is missing or damaged.\n");
                ExitFlag = 1;
            }

```



```

}
break;
case 1:
if (TablesBitMap[i] == '0')
{
printf("The District
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 2:
if (TablesBitMap[i] == '0')
{
printf("The Customer
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 3:
if (TablesBitMap[i] == '0')
{
printf("The History
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 4:
if (TablesBitMap[i] == '0')
{
printf("The New_Order
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 5:
if (TablesBitMap[i] == '0')
{
printf("The Orders table
is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 6:
if (TablesBitMap[i] == '0')
{
printf("The Order_Line
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 7:
if (TablesBitMap[i] == '0')
{
printf("The Item table is
missing or damaged.\n");
ExitFlag = 1;
}
break;
case 8:
if (TablesBitMap[i] == '0')
{
printf("The Stock table
is missing or damaged.\n");
ExitFlag = 1;
}
break;
}
}
}

// if one or more tables are missing, display message and
exit the loader
if (ExitFlag = 1)
{
printf("\nExiting TPC-C Loader!\n");
printf("\nCheck LOGS\ directory for
database\n");
printf("or table creation errors.\n");
// cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT,
v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC,
v_hdbc);
exit(1);
}
}
// cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);
return;
}

tpccldr.mak
# Microsoft Developer Studio Generated NMAKE File, Format Version 4.10
# ** DO NOT EDIT **
# TARGETTYPE "Win32 (x86) Console Application" 0x0103
!IF "$(CFG)" == ""
CFG=tpccldr - Win32 Debug
!MESSAGE No configuration specified. Defaulting to tpccldr - Win32 Debug.
!ENDIF
!IF "$(CFG)" != "tpccldr - Win32 Release" && "$(CFG)" !=\
"tpccldr - Win32 Debug"
!MESSAGE Invalid configuration "$(CFG)" specified.
!MESSAGE You can specify a configuration when running NMAKE on this
makefile
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpccldr.mak" CFG="tpccldr - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpccldr - Win32 Release" (based on "Win32 (x86) Console
Application")
!MESSAGE "tpccldr - Win32 Debug" (based on "Win32 (x86) Console
Application")
!MESSAGE
!ERROR An invalid configuration is specified.
!ENDIF
!IF "$(OS)" == "Windows_NT"
NULL=
!ELSE
NULL=nul
!ENDIF
#####
#####

```

```

# Begin Project
# PROP Target_Last_Scanned "tpcldr - Win32 Debug"
RSC=rc.exe
CPP=cl.exe

!IF "$(CFG)" == "tpcldr - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir "bin"
# PROP Intermediate_Dir "objects"
# PROP Target_Dir ""
OUTDIR=.bin
INTDIR=.objects

ALL : "$(OUTDIR)\tpcldr.exe"

CLEAN :
    -@erase "$(INTDIR)\getargs.obj"
    -@erase "$(INTDIR)\random.obj"
    -@erase "$(INTDIR)\strings.obj"
    -@erase "$(INTDIR)\time.obj"
    -@erase "$(INTDIR)\tpcldr.obj"
    -@erase "$(OUTDIR)\tpcldr.exe"

"$$(OUTDIR)" :
    if not exist "$$(OUTDIR)\$(NULL)" mkdir "$$(OUTDIR)"

"$$(INTDIR)" :
    if not exist "$$(INTDIR)\$(NULL)" mkdir "$$(INTDIR)"

# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
"_CONSOLE" /YX /c
# ADD CPP /nologo /MT /W3 /GX /O2 /I "c:\mssql\dblib\include" /D
"NDEBUG" /D "WIN32" /D "_CONSOLE" /D "DBNTWIN32" /c
# SUBTRACT CPP /YX
CPP_PROJ=/nologo /MT /W3 /GX /O2 /I "c:\mssql\dblib\include" /D
"NDEBUG" /D\
"WIN32" /D "_CONSOLE" /D "DBNTWIN32" /Fo"$$(INTDIR)"/ /c
CPP_OBJS=.objects/
CPP_SBRS=.
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$$(OUTDIR)\tpcldr.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbc32.lib /nologo /subsystem:console /machine:I386
# ADD LINK32 c:\mssql\dblib\lib\ntwdblib.lib kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbcc32.lib odbc32.lib /nologo /subsystem:console /pdb:none
/machine:I386
LINK32_FLAGS=c:\mssql\dblib\lib\ntwdblib.lib kernel32.lib user32.lib
gdi32.lib\
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib\
uuid.lib odbcc32.lib odbc32.lib /nologo /subsystem:console /pdb:none\
/machine:I386 /out:"$(OUTDIR)\tpcldr.exe"
LINK32_OBJS= \

```

```

"$$(INTDIR)\getargs.obj" \
"$$(INTDIR)\random.obj" \
"$$(INTDIR)\strings.obj" \
"$$(INTDIR)\time.obj" \
"$$(INTDIR)\tpcldr.obj"

"$$(OUTDIR)\tpcldr.exe" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ELSEIF "$(CFG)" == "tpcldr - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir "bin"
# PROP Intermediate_Dir "objects"
# PROP Target_Dir ""
OUTDIR=.bin
INTDIR=.objects

ALL : "$(OUTDIR)\tpcldr.exe"

CLEAN :
    -@erase "$(INTDIR)\getargs.obj"
    -@erase "$(INTDIR)\random.obj"
    -@erase "$(INTDIR)\strings.obj"
    -@erase "$(INTDIR)\time.obj"
    -@erase "$(INTDIR)\tpcldr.obj"
    -@erase "$(INTDIR)\vc40.idb"
    -@erase "$(INTDIR)\vc40.pdb"
    -@erase "$(OUTDIR)\tpcldr.exe"

"$$(OUTDIR)" :
    if not exist "$$(OUTDIR)\$(NULL)" mkdir "$$(OUTDIR)"

"$$(INTDIR)" :
    if not exist "$$(INTDIR)\$(NULL)" mkdir "$$(INTDIR)"

# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG"
/D " _CONSOLE" /YX /c
# ADD CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /I "c:\mssql\dblib\include" /D\
"_DEBUG" /D "WIN32" /D "_CONSOLE" /D "DBNTWIN32" /c
# SUBTRACT CPP /YX
CPP_PROJ=/nologo /MTd /W3 /Gm /GX /Zi /Od /I "c:\mssql\dblib\include" /D\
"_DEBUG" /D "WIN32" /D "_CONSOLE" /D "DBNTWIN32"
/Fo"$$(INTDIR)"/
/Fd"$$(INTDIR)"/ /c
CPP_OBJS=.objects/
CPP_SBRS=.
# ADD BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$$(OUTDIR)\tpcldr.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbc32.lib /nologo /subsystem:console /debug /machine:I386

```

```

# ADD LINK32 c:\mssql\dblib\lib\ntwdblib.lib kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbcc32.lib odbccp32.lib /nologo /subsystem:console /pdb:none /debug
/machine:I386
LINK32_FLAGS=c:\mssql\dblib\lib\ntwdblib.lib kernel32.lib user32.lib
gdi32.lib\
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib\
uuid.lib odbcc32.lib odbccp32.lib /nologo /subsystem:console /pdb:none /debug\
/machine:I386 /out:"$(OUTDIR)\tpccldr.exe"
LINK32_OBJS= \
    "$(INTDIR)\getargs.obj" \
    "$(INTDIR)\random.obj" \
    "$(INTDIR)\strings.obj" \
    "$(INTDIR)\time.obj" \
    "$(INTDIR)\tpccldr.obj"

"$(OUTDIR)\tpccldr.exe" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ENDIF

.c{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cxx{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.c{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cxx{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

#####
#####
# Begin Target

# Name "tpccldr - Win32 Release"
# Name "tpccldr - Win32 Debug"

!IF "$(CFG)" == "tpccldr - Win32 Release"

!ELSEIF "$(CFG)" == "tpccldr - Win32 Debug"

!ENDIF

#####
#####
# Begin Source File

SOURCE=.\src\random.c
DEP_CPP_RANDO= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqlldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\random.obj" : $(SOURCE) $(DEP_CPP_RANDO) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File
# End Target
# End Project

# End Source File
#####
#####
# Begin Source File

SOURCE=.\src\strings.c
DEP_CPP_STRIN= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqlldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\strings.obj" : $(SOURCE) $(DEP_CPP_STRIN) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File
#####
#####
# Begin Source File

SOURCE=.\src\time.c
DEP_CPP_TIME_= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqlldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\time.obj" : $(SOURCE) $(DEP_CPP_TIME_) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File
#####
#####
# Begin Source File

SOURCE=.\src\tpccldr.c
DEP_CPP_TPCCCL= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqlldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\tpccldr.obj" : $(SOURCE) $(DEP_CPP_TPCCCL) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File
#####
#####
# Begin Source File

SOURCE=.\src\getargs.c
DEP_CPP_GETAR= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqlldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\getargs.obj" : $(SOURCE) $(DEP_CPP_GETAR) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File

```

#####  
#####

# Appendix C: Tunable Parameters

## Microsoft Windows Server 2003 Enterprise Server

### Changes to the SUT

Changes made to the default installation of .Microsoft Windows Server 2003 Enterprise Server on the SUT

The following services that defaulted to automatic start up, were set to manual start up.

- Alerter
- Automatic Updates
- Computer Browser
- DHCP Client
- Distributed File System
- Distributed Link Tracing Client
- DNS Client
- Help and Support
- IPSEC Policy Agent
- MSSQLSERVER
- Print Spooler
- Remote Registry Service
- Secondary Logon Server
- System Event Notification
- Task Scheduler
- Wireless Configuration

c:\boot.ini added /PAE /3gb

gpedit.msc - Computer Configuration - Windows Settings - Security Settings - Local Policies - User Rights Assignments - policy 'Lock pages in memory' addrd group 'Administrators'

regedit

Added DWORD value to HKLM\SYSTEM\CurrentControlSet\Control\Session Manager\Memory Management "DontVerifyRandomDrivers" 0x1  
Added key "I/O System" to HKLM\SYSTEM\CurrentControlSet\Control\Session Manager  
Added DWORD value to HKLM\SYSTEM\CurrentControlSet\Control\Session Manager\I/O System "CountOperations" 0x0

### SUT System Information Report

System Information report written at: 02/24/03 07:45:50

System Name: IBMSERVER3

[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) .NET Server 2003, Enterprise Edition
Version	5.2.3718 Build 3718

OS Manufacturer	Microsoft Corporation
Activation Status	Activation Pending (33 days remaining)
System Name	IBMSERVER3
System Manufacturer	IBM
System Model	eServer xSeries 360 -[DJFGHOS]-
System Type	X86-based PC
Processor	x86 Family 15 Model 2 Stepping 2 GenuineIntel ~2000 Mhz
Processor	x86 Family 15 Model 2 Stepping 2 GenuineIntel ~2000 Mhz
Processor	x86 Family 15 Model 2 Stepping 2 GenuineIntel ~2000 Mhz
Processor	x86 Family 15 Model 2 Stepping 2 GenuineIntel ~2000 Mhz
Processor	x86 Family 15 Model 2 Stepping 2 GenuineIntel ~2000 Mhz
Processor	x86 Family 15 Model 2 Stepping 2 GenuineIntel ~2000 Mhz
Processor	x86 Family 15 Model 2 Stepping 2 GenuineIntel ~2000 Mhz
Processor	x86 Family 15 Model 2 Stepping 2 GenuineIntel ~2000 Mhz
BIOS Version/Date	IBM -[RU50SB_01-1.06]-, 1/14/2003
SMBIOS Version	2.3
Windows Directory	C:\WINDOWS
System Directory	C:\WINDOWS\system32
Boot Device	\Device\HarddiskVolume1
Locale	United States
Hardware Abstraction Layer	Version = "5.2.3718.0 (dnsrv.021114-1947)"
User Name	IBMSERVER3\Administrator
Time Zone	Eastern Standard Time
Total Physical Memory	8,192.00 MB
Available Physical Memory	7.50 GB
Total Virtual Memory	17.35 GB
Available Virtual Memory	17.01 GB
Page File Space	9.61 GB
Page File	C:\pagefile.sys
[Hardware Resources]	
[Conflicts/Sharing]	
Resource	Device
Memory Address	0xF0000000-0xF7FFFFFFPCI bus

Memory Address 0xF0000000-0xF7FFFFFF	S3 Graphics Inc. Savage4 (Microsoft Corporation)		Memory Address 0xCC000000-0xCFFFFFFF	PCI bus
I/O Port 0x00000000-0x00001FFF	PCI bus		Memory Address 0xCC000000-0xCFFFFFFF	DEC 21154 PCI to PCI bridge
I/O Port 0x00000000-0x00001FFF	Direct memory access controller		Memory Address 0xCC000000-0xCFFFFFFF	Mylex eXtremeRAID 2000 Controller
I/O Port 0x00002000-0x00003FFF	PCI bus		Memory Address 0xD0000000-0xD7FFFFFF	PCI bus
I/O Port 0x00002000-0x00003FFF	DEC 21154 PCI to PCI bridge		Memory Address 0xD0000000-0xD7FFFFFF	DEC 21154 PCI to PCI bridge
I/O Port 0x00002000-0x00003FFF	Mylex eXtremeRAID 2000 Controller		Memory Address 0xD0000000-0xD7FFFFFF	Mylex eXtremeRAID 2000 Controller
Memory Address 0xE8000000-0xEA3FFFFFF	DEC 21154 PCI to PCI bridge		Memory Address 0xDE000000-0xDFFFFFFF	DEC 21154 PCI to PCI bridge
Memory Address 0xE8000000-0xEA3FFFFFF	Mylex eXtremeRAID 2000 Controller		Memory Address 0xDE000000-0xDFFFFFFF	Mylex eXtremeRAID 2000 Controller
Memory Address 0xDA000000-0xDBFFFFFF	DEC 21154 PCI to PCI bridge		I/O Port 0x00005000-0x00005FFF	DEC 21154 PCI to PCI bridge
Memory Address 0xDA000000-0xDBFFFFFF	Mylex eXtremeRAID 2000 Controller		I/O Port 0x00005000-0x00005FFF	Mylex eXtremeRAID 2000 Controller
Memory Address 0xD8000000-0xDFFFFFFF	PCI bus		Memory Address 0xE4000000-0xE63FFFFFF	DEC 21154 PCI to PCI bridge
Memory Address 0xD8000000-0xDFFFFFFF	DEC 21154 PCI to PCI bridge		Memory Address 0xE4000000-0xE63FFFFFF	Mylex eXtremeRAID 2000 Controller
Memory Address 0xD8000000-0xDFFFFFFF	Mylex eXtremeRAID 2000 Disk Array Controller		Memory Address 0xE0000000-0xEFFFFFFF	PCI bus
Memory Address 0xEC000000-0xEE3FFFFFF	DEC 21154 PCI to PCI bridge		Memory Address 0xE0000000-0xEFFFFFFF	DEC 21154 PCI to PCI bridge
Memory Address 0xEC000000-0xEE3FFFFFF	Mylex eXtremeRAID 2000 Controller		Memory Address 0xE0000000-0xEFFFFFFF	Mylex eXtremeRAID 2000 Disk Array Controller
I/O Port 0x00006000-0x00006FFF	DEC 21154 PCI to PCI bridge		I/O Port 0x00007000-0x00007FFF	DEC 21154 PCI to PCI bridge
I/O Port 0x00006000-0x00006FFF	Mylex eXtremeRAID 2000 Controller		I/O Port 0x00007000-0x00007FFF	Mylex eXtremeRAID 2000 Disk Array Controller
I/O Port 0x00003000-0x00003FFF	DEC 21154 PCI to PCI bridge		I/O Port 0x00004000-0x00007FFF	PCI bus
I/O Port 0x00003000-0x00003FFF	Mylex eXtremeRAID 2000 Controller		I/O Port 0x00004000-0x00007FFF	DEC 21154 PCI to PCI bridge
Memory Address 0xCE000000-0xCFFFFFFF	DEC 21154 PCI to PCI bridge		I/O Port 0x00004000-0x00007FFF	Mylex eXtremeRAID 2000 Controller
Memory Address 0xCE000000-0xCFFFFFFF	Mylex eXtremeRAID 2000 Controller		Memory Address 0xD4000000-0xD63FFFFFF	DEC 21154 PCI to PCI bridge
			Memory Address 0xD4000000-0xD63FFFFFF	Mylex eXtremeRAID 2000 Controller

			0x000003F7-0x000003F7	Standard floppy disk controller	OK
Memory Address 0xDC000000-0xDDFFFFFF	DEC 21154 PCI to PCI bridge		0x00000020-0x00000021	Advanced programmable interrupt controller	OK
Memory Address 0xDC000000-0xDDFFFFFF	Mylex eXtremeRAID 2000 Controller		0x000000A0-0x000000A1	Advanced programmable interrupt controller	OK
			0x00000080-0x0000008F	Direct memory access controller	OK
			0x000000C0-0x000000DF	Direct memory access controller	OK
[DMA]			0x00000040-0x00000043	System timer	OK
			0x00000070-0x00000073	System CMOS/real time clock	OK
Resource Device Status			0x00000061-0x00000061	System speaker	OK
Channel 2	Standard floppy disk controller	OK	0x00000374-0x00000375	Motherboard resources	OK
Channel 4	Direct memory access controller	OK	0x00000377-0x00000377	Motherboard resources	OK
			0x00000490-0x000004AF	Motherboard resources	OK
[Forced Hardware]			0x0000040B-0x0000040B	Motherboard resources	OK
			0x000004D0-0x000004D1	Motherboard resources	OK
Device PNP Device ID			0x000004D6-0x000004D6	Motherboard resources	OK
			0x00000600-0x00000600	Motherboard resources	OK
[I/O]			0x00000C00-0x00000C01	Motherboard resources	OK
			0x00000C14-0x00000C14	Motherboard resources	OK
Resource Device Status			0x00000C49-0x00000C49	Motherboard resources	OK
0x00000000-0x00001FFF	PCI bus	OK	0x00000C4A-0x00000C4A	Motherboard resources	OK
0x00000000-0x00001FFF	Direct memory access controller	OK	0x00000C52-0x00000C52	Motherboard resources	OK
0x000003B0-0x000003BB	S3 Graphics Inc. Savage4 (Microsoft Corporation)	OK	0x00000CD6-0x00000CD7	Motherboard resources	OK
0x000003C0-0x000003DF	S3 Graphics Inc. Savage4 (Microsoft Corporation)	OK	0x00000F50-0x00000F58	Motherboard resources	OK
0x00001800-0x0000187F	IBM eServer xSeries 360 PCI-X Hotplug Controller	OK	0x00000700-0x0000070F	OSB4 IDE Controller	OK
0x00001880-0x000018BF	IBM Netfinity 10/100 Ethernet Adapter	OK	0x000001F0-0x000001F7	Primary IDE Channel	OK
0x00001900-0x000019FF	Adaptec AIC-7892 Ultra160 PCI SCSI Card	OK	0x000003F6-0x000003F6	Primary IDE Channel	OK
0x00000A79-0x00000A79	ISAPNP Read Data Port	OK	0x00000170-0x00000177	Secondary IDE Channel	OK
0x00000279-0x00000279	ISAPNP Read Data Port	OK	0x00000376-0x00000376	Secondary IDE Channel	OK
0x00000274-0x00000277	ISAPNP Read Data Port	OK	0x00004000-0x00007FFF	PCI bus	OK
0x0000002E-0x0000002F	Motherboard resources	OK	0x00004000-0x00007FFF	DEC 21154 PCI to PCI bridge	OK
0x00000438-0x00000439	Motherboard resources	OK	0x00004000-0x00007FFF	Mylex eXtremeRAID 2000 Controller	OK
0x00000430-0x00000437	Motherboard resources	OK	0x00007000-0x00007FFF	DEC 21154 PCI to PCI bridge	OK
0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK	0x00007000-0x00007FFF	Mylex eXtremeRAID 2000 Disk Array Controller	OK
0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK	0x00006000-0x00006FFF	DEC 21154 PCI to PCI bridge	OK
0x000003F0-0x000003F5	Standard floppy disk controller	OK	0x00006000-0x00006FFF	Mylex eXtremeRAID 2000 Controller	OK
			0x00005000-0x00005FFF	DEC 21154 PCI to PCI bridge	OK
			0x00005000-0x00005FFF	Mylex eXtremeRAID 2000 Controller	OK

0x00002000-0x00003FFF	PCI bus	OK
0x00002000-0x00003FFF	DEC 21154 PCI to PCI bridge	OK
0x00002000-0x00003FFF	Mylex eXtremeRAID 2000 Controller	OK
0x00003000-0x00003FFF	DEC 21154 PCI to PCI bridge	OK
0x00003000-0x00003FFF	Mylex eXtremeRAID 2000 Controller	OK

[IRQs]

Resource	Device	Status
IRQ 36	Microsoft ACPI-Compliant System	OK
IRQ 5	IBM eServer xSeries 360 PCI-X Hotplug Controller	OK
IRQ 42	IBM Netfinity 10/100 Ethernet Adapter	OK
IRQ 41	Adaptec AIC-7892 Ultra160 PCI SCSI Card	OK
IRQ 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
IRQ 12	PS/2 Compatible Mouse	OK
IRQ 6	Standard floppy disk controller	OK
IRQ 0	System timer	OK
IRQ 8	System CMOS/real time clock	OK
IRQ 14	Primary IDE Channel	OK
IRQ 16	ServerWorks (RCC) PCI to USB Open Host Controller	OK
IRQ 43	Mylex eXtremeRAID 2000 Disk Array Controller	OK
IRQ 24	Mylex eXtremeRAID 2000 Controller	OK
IRQ 19	Mylex eXtremeRAID 2000 Controller	OK
IRQ 20	Mylex eXtremeRAID 2000 Controller	OK
IRQ 29	Mylex eXtremeRAID 2000 Controller	OK
IRQ 33	Mylex eXtremeRAID 2000 Controller	OK

[Memory]

Resource	Device	Status
0xF0000000-0xF7FFFFFF	PCI bus	OK
0xF0000000-0xF7FFFFFF	S3 Graphics Inc. Savage4 (Microsoft Corporation)	OK
0xF8000000-0xFBFFFFFF	PCI bus	OK
0xFBF80000-0xFBFFFFFF	S3 Graphics Inc. Savage4 (Microsoft Corporation)	OK
0xA0000-0xBFFFF	S3 Graphics Inc. Savage4 (Microsoft Corporation)	OK

0xFBC00000-0xFBFFFFFF	IBM eServer xSeries 360 PCI-X Hotplug Controller	OK
0xFBF7F000-0xFBF7FFFF	IBM Netfinity 10/100 Ethernet Adapter	OK
0xFBE00000-0xFBEFFFFFF	IBM Netfinity 10/100 Ethernet Adapter	OK
0xFBF7E000-0xFBF7EFFF	Adaptec AIC-7892 Ultra160 PCI SCSI Card	OK
0xFBF7D000-0xFBF7DFFF	ServerWorks (RCC) PCI to USB Open Host Controller	OK
0xD8000000-0xDFFFFFFF	PCI bus	OK
0xD8000000-0xDFFFFFFF	DEC 21154 PCI to PCI bridge	OK
0xD8000000-0xDFFFFFFF	Mylex eXtremeRAID 2000 Disk Array Controller	OK
0xE0000000-0xEFFFFFFF	PCI bus	OK
0xE0000000-0xEFFFFFFF	DEC 21154 PCI to PCI bridge	OK
0xE0000000-0xEFFFFFFF	Mylex eXtremeRAID 2000 Disk Array Controller	OK
0xE4000000-0xE63FFFFF	DEC 21154 PCI to PCI bridge	OK
0xE4000000-0xE63FFFFF	Mylex eXtremeRAID 2000 Controller	OK
0xDA000000-0xDBFFFFFF	DEC 21154 PCI to PCI bridge	OK
0xDA000000-0xDBFFFFFF	Mylex eXtremeRAID 2000 Controller	OK
0xE8000000-0xEA3FFFFF	DEC 21154 PCI to PCI bridge	OK
0xE8000000-0xEA3FFFFF	Mylex eXtremeRAID 2000 Controller	OK
0xDC000000-0xDDFFFFFF	DEC 21154 PCI to PCI bridge	OK
0xDC000000-0xDDFFFFFF	Mylex eXtremeRAID 2000 Controller	OK
0xEC000000-0xEE3FFFFF	DEC 21154 PCI to PCI bridge	OK
0xEC000000-0xEE3FFFFF	Mylex eXtremeRAID 2000 Controller	OK
0xDE000000-0xDFFFFFFF	DEC 21154 PCI to PCI bridge	OK
0xDE000000-0xDFFFFFFF	Mylex eXtremeRAID 2000 Controller	OK
0xCC000000-0xCFFFFFFF	PCI bus	OK
0xCC000000-0xCFFFFFFF	DEC 21154 PCI to PCI bridge	OK
0xCC000000-0xCFFFFFFF	Mylex eXtremeRAID 2000 Controller	OK
0xD0000000-0xD7FFFFFF	PCI bus	OK
0xD0000000-0xD7FFFFFF	DEC 21154 PCI to PCI bridge	OK
0xD0000000-0xD7FFFFFF	Mylex eXtremeRAID 2000 Controller	OK
0xD4000000-0xD63FFFFF	DEC 21154 PCI to PCI bridge	OK



0xD4000000-0xD63FFFFFF Mylex eXtremeRAID 2000 Controller  
OK

0xCE000000-0xCFFFFFFF DEC 21154 PCI to PCI bridge OK

0xCE000000-0xCFFFFFFF Mylex eXtremeRAID 2000 Controller  
OK

[Components]

[Multimedia]

[Audio Codecs]

CODEC Version	Manufacturer Size	Description Creation Date	Status	File
c:\windows\system32\l3codeca.acm		Fraunhofer Institut Integrierte Schaltungen IIS Fraunhofer IIS MPEG Layer-3 Codec	OK	C:\WINDOWS\system32\L3CODECA.ACM 1, 9, 0, 0305 284.00 KB (290,816 bytes) 11/15/2002 7:00 AM
c:\windows\system32\sl_anet.acm		Sipro Lab Telecom Inc. Sipro Lab Telecom Audio Codec	OK	C:\WINDOWS\system32\SL_ANET.ACM 3.02 84.00 KB (86,016 bytes) 11/15/2002 7:00 AM
c:\windows\system32\msaud32.acm		Microsoft Corporation Windows Media Audio Codec	OK	C:\WINDOWS\system32\MSAUD32.ACM 8.00.00.4487 288.00 KB (294,912 bytes) 11/15/2002 7:00 AM
c:\windows\system32\msg723.acm		Microsoft Corporation	OK	C:\WINDOWS\system32\MSG723.ACM 4.4.4000 116.00 KB (118,784 bytes) 1/27/2003 5:31 PM
c:\windows\system32\msg711.acm		Microsoft Corporation	OK	C:\WINDOWS\system32\MSG711.ACM 5.2.3718.0 (dnsrv.021114-1947) 10.00 KB (10,240 bytes) 11/15/2002 7:00 AM
c:\windows\system32\tsoft32.acm		DSP GROUP, INC.	OK	C:\WINDOWS\system32\TSSOFT32.ACM 1.01 9.50 KB (9,728 bytes) 11/15/2002 7:00 AM
c:\windows\system32\msadp32.acm		Microsoft Corporation	OK	C:\WINDOWS\system32\MSADP32.ACM 5.2.3718.0 (dnsrv.021114-1947) 14.50 KB (14,848 bytes) 11/15/2002 7:00 AM
c:\windows\system32\msgsm32.acm		Microsoft Corporation	OK	C:\WINDOWS\system32\MSGSM32.ACM 5.2.3718.0 (dnsrv.021114-1947) 20.50 KB (20,992 bytes) 11/15/2002 7:00 AM
c:\windows\system32\imaadp32.acm		Microsoft Corporation	OK	C:\WINDOWS\system32\IMAADP32.ACM 5.2.3718.0 (dnsrv.021114-1947) 15.50 KB (15,872 bytes) 11/15/2002 7:00 AM

[Video Codecs]

CODEC Version	Manufacturer Size	Description Creation Date	Status	File
c:\windows\system32\msh261.drv		Microsoft Corporation	OK	C:\WINDOWS\system32\MSH261.DRV 4.4.4000 180.00 KB (184,320 bytes) 1/27/2003 5:31 PM
c:\windows\system32\msyuv.dll		Microsoft Corporation	OK	C:\WINDOWS\system32\MSYUV.DLL 5.2.3718.0 (dnsrv.021114-1947) 16.50 KB (16,896 bytes) 11/15/2002 10:35 AM
c:\windows\system32\tsbyuv.dll		Microsoft Corporation	OK	C:\WINDOWS\system32\TSBYUV.DLL 5.2.3718.0 (dnsrv.021114-1947) 8.00 KB (8,192 bytes) 11/15/2002 10:36 AM
c:\windows\system32\msrle32.dll		Microsoft Corporation	OK	C:\WINDOWS\system32\MSRLE32.DLL 5.2.3718.0 (dnsrv.021114-1947) 10.50 KB (10,752 bytes) 11/15/2002 7:00 AM
c:\windows\system32\msh263.drv		Microsoft Corporation	OK	C:\WINDOWS\system32\MSH263.DRV 4.4.4000 284.00 KB (290,816 bytes) 11/15/2002 10:34 AM
c:\windows\system32\msvidc32.dll		Microsoft Corporation	OK	C:\WINDOWS\system32\MSVIDC32.DLL 5.2.3718.0 (dnsrv.021114-1947) 26.50 KB (27,136 bytes) 11/15/2002 7:00 AM
c:\windows\system32\ir32_32.dll		Not Available	OK	C:\WINDOWS\system32\IR32_32.DLL Not Available 194.50 KB (199,168 bytes) 11/15/2002 7:00 AM
c:\windows\system32\iyuv_32.dll		Microsoft Corporation	OK	C:\WINDOWS\system32\IYUV_32.DLL 5.2.3718.0 (dnsrv.021114-1947) 45.00 KB (46,080 bytes) 11/15/2002 10:35 AM
c:\windows\system32\iccvid.dll		Radius Inc.	OK	C:\WINDOWS\system32\ICCVID.DLL 1.10.0.6 108.00 KB (110,592 bytes) 11/15/2002 7:00 AM

[CD-ROM]

Item	Value
Drive	D:
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	LG CD-ROM CRN-8245B
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROM\LG_CD-ROM_CRN-8245B_1.13_15 &326853DD&0&0.0.0

Driver c:\windows\system32\drivers\cdrom.sys (5.2.3718.0 (dnsrv.021114-1947), 47.38 KB (48,512 bytes), 11/15/2002 7:00 AM)

[Sound Device]

Item Value

[Display]

Item Value

Name S3 Graphics Inc. Savage4 (Microsoft Corporation)

PNP Device ID

PCI\VEN\_5333&DEV\_8A22&SUBSYS\_01C51014&REV\_063&267A616A&0&08

Adapter Type S3 Savage4, S3 Graphics, Inc. compatible

Adapter Description S3 Graphics Inc. Savage4 (Microsoft Corporation)

Adapter RAM 8.00 MB (8,388,608 bytes)

Installed Drivers S3gsav4.dll

Driver Version 6.13.10.8013-13.95.13

INF File s3gsav4.inf (S3SAVAGE4 section)

Color Planes 1

Color Table Entries 4294967296

Resolution 800 x 600 x 60 hertz

Bits/Pixel 32

Memory Address 0xFBFB80000-0xFBFFFFFF

Memory Address 0xF0000000-0xF7FFFFFF

I/O Port 0x000003B0-0x000003BB

I/O Port 0x000003C0-0x000003DF

Memory Address 0xA0000-0xBFFFF

Driver c:\windows\system32\drivers\s3gsav4m.sys (6.13.10.8013-13.95.13, 135.63 KB (138,880 bytes), 1/27/2003 12:06 PM)

[Infrared]

Item Value

[Input]

[Keyboard]

Item Value

Description Standard 101/102-Key or Microsoft Natural PS/2 Keyboard

Name Enhanced (101- or 102-key)

Layout 00000409

PNP Device ID ACPI\PNP0303\4&23FD4C84&0

Number of Function Keys 12

I/O Port 0x00000060-0x00000060

I/O Port 0x00000064-0x00000064

IRQ Channel IRQ 1

Driver c:\windows\system32\drivers\i8042prt.sys (5.2.3718.0 (dnsrv.021114-1947), 50.63 KB (51,840 bytes), 11/15/2002 7:00 AM)

[Pointing Device]

Item Value

Hardware Type PS/2 Compatible Mouse

Number of Buttons 3

Status OK

PNP Device ID ACPI\PNP0F13\4&23FD4C84&0

Power Management Supported No

Double Click Threshold 6

Handedness Right Handed Operation

IRQ Channel IRQ 12

Driver c:\windows\system32\drivers\i8042prt.sys (5.2.3718.0 (dnsrv.021114-1947), 50.63 KB (51,840 bytes), 11/15/2002 7:00 AM)

[Modem]

Item Value

[Network]

[Adapter]

Item Value

Name [00000001] IBM Netfinity 10/100 Ethernet Adapter

Adapter Type Ethernet 802.3  
 Product Type IBM Netfinity 10/100 Ethernet Adapter  
 Installed Yes  
 PNP Device ID  
 PCI\VEN\_8086&DEV\_1229&SUBSYS\_024D1014&REV\_08\3&267A616A&0&18  
 Last Reset 2/23/2003 10:57 AM  
 Index 1  
 Service Name E100B  
 IP Address 192.168.132.200  
 IP Subnet 255.255.255.0  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 00:02:55:AC:20:56  
 Memory Address 0xFBF7F000-0xFBF7FFFF  
 I/O Port 0x00001880-0x000018BF  
 Memory Address 0xFBE00000-0xFBEFFFFF  
 IRQ Channel IRQ 42  
 Driver c:\windows\system32\drivers\le100bnt5.sys (6.04.14.0000, 138.27 KB (141,584 bytes), 9/25/2002 7:06 AM)

Name [00000002] RAS Async Adapter  
 Adapter Type Not Available  
 Product Type RAS Async Adapter  
 Installed Yes  
 PNP Device ID Not Available  
 Last Reset 2/23/2003 10:57 AM  
 Index 2  
 Service Name AsyncMac  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available

Name [00000003] WAN Miniport (L2TP)  
 Adapter Type Not Available  
 Product Type WAN Miniport (L2TP)  
 Installed Yes  
 PNP Device ID ROOT\MS\_L2TPMINIPORT\0000  
 Last Reset 2/23/2003 10:57 AM  
 Index 3  
 Service Name Rasl2tp  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Driver c:\windows\system32\drivers\rasl2tp.sys (5.2.3718.0 (dnsrv.021114-1947), 61.63 KB (63,104 bytes), 11/15/2002 7:00 AM)

Name [00000004] WAN Miniport (PPTP)  
 Adapter Type Wide Area Network (WAN)  
 Product Type WAN Miniport (PPTP)  
 Installed Yes  
 PNP Device ID ROOT\MS\_PPTPMINIPORT\0000  
 Last Reset 2/23/2003 10:57 AM  
 Index 4  
 Service Name PptpMiniport  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 50:50:54:50:30:30  
 Driver c:\windows\system32\drivers\raspptp.sys (5.2.3718.0 (dnsrv.021114-1947), 56.63 KB (57,984 bytes), 11/15/2002 7:00 AM)

Name [00000005] WAN Miniport (PPPOE)

Adapter Type Wide Area Network (WAN)  
 Product Type WAN Miniport (PPPOE)  
 Installed Yes  
 PNP Device ID ROOT\MS\_PPPOEMINIPOINT\0000  
 Last Reset 2/23/2003 10:57 AM  
 Index 5  
 Service Name RasPppoe  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 33:50:6F:45:30:30  
 Driver c:\windows\system32\drivers\rasppoe.sys (5.2.3718.0 (dnsrv.021114-1947), 36.88 KB (37,760 bytes), 11/15/2002 7:00 AM)

Name [00000006] Direct Parallel  
 Adapter Type Not Available  
 Product Type Direct Parallel  
 Installed Yes  
 PNP Device ID ROOT\MS\_PTMINIPOINT\0000  
 Last Reset 2/23/2003 10:57 AM  
 Index 6  
 Service Name Raspti  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Driver c:\windows\system32\drivers\raspti.sys (5.2.3718.0 (dnsrv.021114-1947), 16.38 KB (16,768 bytes), 11/15/2002 7:00 AM)

Name [00000007] WAN Miniport (IP)  
 Adapter Type Not Available  
 Product Type WAN Miniport (IP)

Installed Yes  
 PNP Device ID ROOT\MS\_NDISWANIP\0000  
 Last Reset 2/23/2003 10:57 AM  
 Index 7  
 Service Name NdisWan  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Driver c:\windows\system32\drivers\ndiswan.sys (5.2.3718.0 (dnsrv.021114-1947), 87.25 KB (89,344 bytes), 11/15/2002 7:00 AM)

Name [00000008] Intel(R) PRO/1000 XT Server Adapter  
 Adapter Type Not Available  
 Product Type Intel(R) PRO/1000 XT Server Adapter  
 Installed Yes  
 PNP Device ID Not Available  
 Last Reset 2/23/2003 10:57 AM  
 Index 8  
 Service Name E1000  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled No  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available

[Protocol]

Item Value  
 Name MSAFD Tcpip [TCP/IP]  
 Connectionless Service No  
 Guarantees Delivery Yes

Guarantees Sequencing Yes  
 Maximum Address Size 16 bytes  
 Maximum Message Size 0 bytes  
 Message Oriented No  
 Minimum Address Size 16 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data Yes  
 Supports Graceful Closing Yes  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD Tcpiip [UDP/IP]

Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 16 bytes  
 Maximum Message Size 63.93 KB (65,467 bytes)  
 Message Oriented Yes  
 Minimum Address Size 16 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting Yes

Name RSVP UDP Service Provider

Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 16 bytes  
 Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes  
 Minimum Address Size 16 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption Yes  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting Yes

Name RSVP TCP Service Provider

Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 16 bytes  
 Maximum Message Size 0 bytes  
 Message Oriented No  
 Minimum Address Size 16 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption Yes  
 Supports Expedited Data Yes  
 Supports Graceful Closing Yes  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS

[\Device\NetBT\_Tcpip\_{DF5D143D-63A5-4591-8FE0-77F9C12B74BE}]  
SEQPACKET 3

Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)  
 Message Oriented Yes  
 Minimum Address Size 20 bytes

Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{DF5D143D-63A5-4591-8FE0-77F9C12B74BE}]  
 DATAGRAM 3

Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)  
 Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{9FA920CC-9739-4F7D-B154-396C44C90D3C}]  
 SEQPACKET 0

Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)  
 Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No

Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{9FA920CC-9739-4F7D-B154-396C44C90D3C}]  
 DATAGRAM 0

Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)  
 Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{170F36E7-D9C9-45CC-B817-E06FB22EC333}]  
 SEQPACKET 1

Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)  
 Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No

Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{170F36E7-D9C9-45CC-B817-E06FB22EC333}]  
 DATAGRAM 1

Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)  
 Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{7EC8EE0F-4C3E-4058-B73F-26142B6804D0}]  
 SEQPACKET 2

Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)  
 Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No

Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{7EC8EE0F-4C3E-4058-B73F-26142B6804D0}]  
 DATAGRAM 2

Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)  
 Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

[WinSock]

Item	Value
File	c:\windows\system32\winsock.dll
Size	2.80 KB (2,864 bytes)
Version	3.10
File	c:\windows\system32\wsock32.dll
Size	22.00 KB (22,528 bytes)
Version	5.2.3718.0 (dnsrv.021114-1947)

[Ports]

[Serial]

Item Value

[Parallel]

Item Value

[Storage]

[Drives]

Item Value

Drive A:

Description 3 1/2 Inch Floppy Drive

Drive C:

Description Local Fixed Disk

Compressed No

File System NTFS

Size 16.94 GB (18,186,059,776 bytes)

Free Space 13.42 GB (14,414,602,240 bytes)

Volume Name

Volume Serial Number 14CC2106

Drive D:

Description CD-ROM Disc

Drive E:

Description Local Fixed Disk

Compressed Not Available

File System Not Available

Size Not Available

Free Space Not Available

Volume Name Not Available

Volume Serial Number Not Available

Drive F:

Description Local Fixed Disk

Compressed Not Available

File System Not Available

Size Not Available

Free Space Not Available

Volume Name Not Available

Volume Serial Number Not Available

Drive G:

Description Local Fixed Disk

Compressed Not Available

File System Not Available

Size Not Available

Free Space Not Available

Volume Name Not Available

Volume Serial Number Not Available

Drive H:

Description Local Fixed Disk

Compressed Not Available

File System Not Available

Size Not Available

Free Space Not Available

Volume Name Not Available

Volume Serial Number Not Available

Drive I:

Description Local Fixed Disk

Compressed Not Available

File System Not Available

Size Not Available

Free Space Not Available

Volume Name Not Available

Volume Serial Number Not Available

Drive J:



Description Local Fixed Disk  
 Compressed Not Available  
 File System Not Available  
 Size Not Available  
 Free Space Not Available  
 Volume Name Not Available  
 Volume Serial Number Not Available

Drive S:

Description Local Fixed Disk  
 Compressed No  
 File System NTFS  
 Size 195.32 GB (209,719,930,880 bytes)  
 Free Space 40.55 GB (43,544,338,432 bytes)  
 Volume Name Backup\_cool1  
 Volume Serial Number E843E8D0

Drive T:

Description Local Fixed Disk  
 Compressed No  
 File System NTFS  
 Size 195.32 GB (209,719,930,880 bytes)  
 Free Space 40.56 GB (43,552,792,576 bytes)  
 Volume Name Backup\_cool2  
 Volume Serial Number 545D0229

Drive X:

Description Network Connection  
 Provider Name \\192.168.132.253\e\$

Drive Y:

Description Local Fixed Disk  
 Compressed No  
 File System NTFS  
 Size 195.32 GB (209,719,930,880 bytes)  
 Free Space 40.55 GB (43,544,993,792 bytes)  
 Volume Name Backup1\_2.0  
 Volume Serial Number B0F0B35B

Drive Z:

Description Local Fixed Disk  
 Compressed No  
 File System NTFS  
 Size 195.32 GB (209,719,930,880 bytes)  
 Free Space 39.87 GB (42,810,241,024 bytes)  
 Volume Name Backup2\_2.0  
 Volume Serial Number FC95FF89

[Disks]

Item	Value
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	IBM-ESXS ST318305LC !# SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	0
SCSI Logical Unit	0
SCSI Port	2
SCSI Target ID	12
Sectors/Track	63
Size	16.94 GB (18,194,319,360 bytes)
Total Cylinders	2,212
Total Sectors	35,535,780
Total Tracks	564,060
Tracks/Cylinder	255
Partition	Disk #0, Partition #0
Partition Size	16.94 GB (18,186,061,824 bytes)
Partition Starting Offset	32,256 bytes
Description	\\.\PHYSICALDRIVE3
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk

Partitions 2  
 SCSI Bus 4  
 SCSI Logical Unit 0  
 SCSI Port 5  
 SCSI Target ID 0  
 Sectors/Track 63  
 Size 592.54 GB (636,233,633,280 bytes)  
 Total Cylinders 77,351  
 Total Sectors 1,242,643,815  
 Total Tracks 19,724,505  
 Tracks/Cylinder 255  
 Partition Disk #3, Partition #0  
 Partition Size 53.76 GB (57,724,982,784 bytes)  
 Partition Starting Offset 8,257,536 bytes  
 Partition Disk #3, Partition #1  
 Partition Size 195.32 GB (209,719,931,904 bytes)  
 Partition Starting Offset 57,733,272,576 bytes

Description \\.\PHYSICALDRIVE5  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk

Partitions 2  
 SCSI Bus 4  
 SCSI Logical Unit 0  
 SCSI Port 7  
 SCSI Target ID 0  
 Sectors/Track 63  
 Size 592.54 GB (636,233,633,280 bytes)  
 Total Cylinders 77,351  
 Total Sectors 1,242,643,815  
 Total Tracks 19,724,505  
 Tracks/Cylinder 255  
 Partition Disk #5, Partition #0  
 Partition Size 53.76 GB (57,724,982,784 bytes)  
 Partition Starting Offset 8,257,536 bytes  
 Partition Disk #5, Partition #1

Partition Size 195.32 GB (209,719,931,904 bytes)  
 Partition Starting Offset 57,733,272,576 bytes

Description \\.\PHYSICALDRIVE4  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk

Partitions 2  
 SCSI Bus 4  
 SCSI Logical Unit 0  
 SCSI Port 6  
 SCSI Target ID 0  
 Sectors/Track 63  
 Size 829.55 GB (890,723,796,480 bytes)  
 Total Cylinders 108,291  
 Total Sectors 1,739,694,915  
 Total Tracks 27,614,205  
 Tracks/Cylinder 255  
 Partition Disk #4, Partition #0  
 Partition Size 73.29 GB (78,699,446,784 bytes)  
 Partition Starting Offset 8,257,536 bytes  
 Partition Disk #4, Partition #1  
 Partition Size 195.32 GB (209,719,931,904 bytes)  
 Partition Starting Offset 78,707,736,576 bytes

Description \\.\PHYSICALDRIVE1  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk

Partitions 1  
 SCSI Bus 4  
 SCSI Logical Unit 0  
 SCSI Port 3  
 SCSI Target ID 2  
 Sectors/Track 63

Size 135.53 GB (145,521,653,760 bytes)  
 Total Cylinders 17,692  
 Total Sectors 284,221,980  
 Total Tracks 4,511,460  
 Tracks/Cylinder 255  
 Partition Disk #1, Partition #0  
 Partition Size 117.24 GB (125,887,878,144 bytes)  
 Partition Starting Offset 8,257,536 bytes

Description \\.\PHYSICALDRIVE2  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk

Partitions 2  
 SCSI Bus 4  
 SCSI Logical Unit 0  
 SCSI Port 4  
 SCSI Target ID 0  
 Sectors/Track 63

Size 829.55 GB (890,723,796,480 bytes)  
 Total Cylinders 108,291  
 Total Sectors 1,739,694,915  
 Total Tracks 27,614,205  
 Tracks/Cylinder 255

Partition Disk #2, Partition #0  
 Partition Size 73.29 GB (78,699,446,784 bytes)  
 Partition Starting Offset 8,257,536 bytes  
 Partition Disk #2, Partition #1  
 Partition Size 195.32 GB (209,719,931,904 bytes)  
 Partition Starting Offset 78,707,736,576 bytes

Description \\.\PHYSICALDRIVE6  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk

Partitions 1  
 SCSI Bus 4  
 SCSI Logical Unit 0  
 SCSI Port 8  
 SCSI Target ID 0  
 Sectors/Track 63  
 Size 711.04 GB (763,478,714,880 bytes)  
 Total Cylinders 92,821  
 Total Sectors 1,491,169,365  
 Total Tracks 23,669,355  
 Tracks/Cylinder 255  
 Partition Disk #6, Partition #0  
 Partition Size 127.01 GB (136,375,110,144 bytes)  
 Partition Starting Offset 8,257,536 bytes

[SCSI]

Item	Value
Name	Adaptec AIC-7892 Ultra160 PCI SCSI Card
Manufacturer	Adaptec
Status	OK
PNP Device ID	PCI\VEN_9005&DEV_008F&SUBSYS_02011014&REV_02\3&267A616A&0&20
I/O Port	0x00001900-0x000019FF
Memory Address	0xFBF7E000-0xFBF7EFFF
IRQ Channel	IRQ 41
Driver	c:\windows\system32\drivers\adpu160m.sys (RTC_XP07 (lab01_n(storbuild).010917-1031), 99.63 KB (102,016 bytes), 1/28/2003 11:52 AM)

Name	Mylex eXtremeRAID 2000 Disk Array Controller
Manufacturer	Mylex
Status	OK
PNP Device ID	PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&1138865F&0&4008
Memory Address	0xE0000000-0xEFFFFFFF
I/O Port	0x00007000-0x00007FFF
Memory Address	0xD8000000-0xDFFFFFFF
IRQ Channel	IRQ 43

Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller

Manufacturer Mylex

Status OK

PNP Device ID  
PCI\VEN\_1069&DEV\_BA56&SUBSYS\_00401069&REV\_00\4&30418910&0&4010

Memory Address 0xE4000000-0xE63FFFFF

I/O Port 0x00006000-0x00006FFF

Memory Address 0xDA000000-0xDBFFFFFFF

IRQ Channel IRQ 24

Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller

Manufacturer Mylex

Status OK

PNP Device ID  
PCI\VEN\_1069&DEV\_BA56&SUBSYS\_00401069&REV\_00\4&1A9D83F&0&4018

Memory Address 0xE8000000-0xEA3FFFFF

I/O Port 0x00005000-0x00005FFF

Memory Address 0xDC000000-0xDDFFFFFFF

IRQ Channel IRQ 19

Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller

Manufacturer Mylex

Status OK

PNP Device ID  
PCI\VEN\_1069&DEV\_BA56&SUBSYS\_00401069&REV\_00\4&20B2DAF0&0&4020

Memory Address 0xEC000000-0xEE3FFFFF

I/O Port 0x00004000-0x00007FFF

Memory Address 0xDE000000-0xDFFFFFFFF

IRQ Channel IRQ 20

Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller

Manufacturer Mylex

Status OK

PNP Device ID  
PCI\VEN\_1069&DEV\_BA56&SUBSYS\_00401069&REV\_00\4&235BDD1F&0&4008

Memory Address 0xD0000000-0xD7FFFFFFF

I/O Port 0x00003000-0x00003FFF

Memory Address 0xCC000000-0xCFFFFFFF

IRQ Channel IRQ 29

Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller

Manufacturer Mylex

Status OK

PNP Device ID  
PCI\VEN\_1069&DEV\_BA56&SUBSYS\_00401069&REV\_00\4&6CA15C9&0&4010

Memory Address 0xD4000000-0xD63FFFFF

I/O Port 0x00002000-0x00003FFF

Memory Address 0xCE000000-0xCFFFFFFF

IRQ Channel IRQ 33

Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

[IDE]

Item Value

Name OSB4 IDE Controller

Manufacturer ServerWorks

Status OK

PNP Device ID  
PCI\VEN\_1166&DEV\_0211&SUBSYS\_00000000&REV\_00\3&267A616A&0&79

I/O Port 0x00000700-0x0000070F

Driver c:\windows\system32\drivers\pciide.sys (5.2.3718.0 (dnsrv.021114-1947), 3.50 KB (3,584 bytes), 11/15/2002 7:00 AM)

Name Primary IDE Channel

Manufacturer (Standard IDE ATA/ATAPI controllers)

Status OK

PNP Device ID PCI\IDE\IDECHANNEL\4&23727F60&0&0

I/O Port 0x000001F0-0x000001F7

I/O Port 0x000003F6-0x000003F6  
 IRQ Channel IRQ 14  
 Driver c:\windows\system32\drivers\atapi.sys (5.2.3718.0  
 (dnsrv.021114-1947), 90.50 KB (92,672 bytes), 11/15/2002 7:00 AM)

Name Secondary IDE Channel  
 Manufacturer (Standard IDE ATA/ATAPI controllers)  
 Status OK  
 PNP Device ID PCI\IDE\DECHANEL\4&23727F60&0&1

I/O Port 0x00000170-0x00000177  
 I/O Port 0x00000376-0x00000376  
 Driver c:\windows\system32\drivers\atapi.sys (5.2.3718.0  
 (dnsrv.021114-1947), 90.50 KB (92,672 bytes), 11/15/2002 7:00 AM)

[Printing]

Name	Driver	Port Name	Server Name
------	--------	-----------	-------------

[Problem Devices]

Device	PNP Device ID	Error Code
Not Available for this device are not installed.	ACPI\IBM37D4\2&DABA3FF&0	The drivers

[USB]

Device	PNP Device ID
ServerWorks (RCC) PCI to USB Open Host Controller	PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_04\3&267A616A&0&7A
USB Root Hub	USB\ROOT_HUB\4&372644EA&0

[Software Environment]

[System Drivers]

Name	Description	File	Type	Started	Start Mode
State	Status	Error Control	Accept	Pause	Accept
abiosdsk	Abiosdsk	Not Available	Kernel Driver	No	No
Disabled	Stopped	OK	Ignore	No	No

acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	Kernel Driver	Yes
Boot	Running	OK	Normal	No
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver	No
Driver	No	Disabled	Stopped	OK
			Normal	No
adpu160m	adpu160m	c:\windows\system32\drivers\adpu160m.sys	Kernel Driver	Yes
Driver	Yes	Boot	Running	OK
			Normal	No
adpu320	adpu320	Not Available	Kernel Driver	No
Disabled	Stopped	OK	Normal	No
afcnt	afcnt	Not Available	Kernel Driver	No
Disabled	Stopped	OK	Normal	No
afd	AFD Networking Support Environment	c:\windows\system32\drivers\afd.sys	Kernel Driver	Yes
Auto	Running	OK	Normal	No
aha154x	Aha154x	Not Available	Kernel Driver	No
Disabled	Stopped	OK	Normal	No
aic78u2	aic78u2	Not Available	Kernel Driver	No
Disabled	Stopped	OK	Normal	No
aic78xx	aic78xx	Not Available	Kernel Driver	No
Disabled	Stopped	OK	Normal	No
aliide	AliIde	Not Available	Kernel Driver	No
Disabled	Stopped	OK	Normal	No
asynmac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asynmac.sys	Kernel Driver	No
Manual	Stopped	OK	Normal	No
atapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys	Kernel Driver	Yes
Boot	Running	OK	Normal	No
atdisk	Atdisk	Not Available	Kernel Driver	No
Disabled	Stopped	OK	Ignore	No
atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys	Kernel Driver	No
Manual	Stopped	OK	Normal	No
audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys	Kernel Driver	No
Kernel Driver	Yes	Manual	Running	OK
No	Yes			Normal
beep	Beep	c:\windows\system32\drivers\beep.sys	Kernel Driver	Yes
Driver	Yes	System	Running	OK
			Normal	No
cbidf2k	cbidf2k	c:\windows\system32\drivers\cbidf2k.sys	Kernel Driver	No
Driver	No	Disabled	Stopped	OK
			Normal	No
cd20xrnt	cd20xrnt	Not Available	Kernel Driver	No
Disabled	Stopped	OK	Normal	No
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys	File System Driver	Yes
Driver	Yes	Disabled	Running	OK
			Normal	No
cdrom	CD-ROM Driver	c:\windows\system32\drivers\cdrom.sys	Kernel Driver	No
Kernel Driver	Yes	System	Running	OK
No	Yes			Normal



ksecdd Driver Yes	KSecDD Yes	c:\windows\system32\drivers\ksecdd.sys	Kernel No	Not Available OK	Kernel Driver Normal	No	nfrd960 Disabled	nfrd960 Stopped	Not Available OK	Kernel Driver Normal	No	No	
lp6nds35 Disabled	lp6nds35 Stopped	Not Available OK	Kernel Driver No	Kernel Driver Normal	No	No	npfs Driver Yes	Npfs Yes	c:\windows\system32\drivers\npfs.sys	File System Running	OK	Normal	No
macdisk Driver Yes	macdisk Yes	c:\windows\system32\drivers\mac2w2k.sys	Kernel No	Kernel Driver OK	Kernel Driver Normal	No	ntfs Driver Yes	Ntfs Yes	c:\windows\system32\drivers\ntfs.sys	File System Running	OK	Normal	No
mnmdd Driver Yes	mnmdd Yes	c:\windows\system32\drivers\mnmdd.sys	Kernel No	Kernel Driver OK	Kernel Driver Ignore	No	null Driver Yes	Null Yes	c:\windows\system32\drivers\null.sys	Kernel Running	OK	Normal	No
modem Driver No	Modem No	c:\windows\system32\drivers\modem.sys	Kernel No	Kernel Driver OK	Kernel Driver Ignore	No	parport Driver No	Parport No	c:\windows\system32\drivers\parport.sys	Kernel Running	OK	Ignore	No
mouclass Kernel Driver No	Mouse Class Driver Yes	c:\windows\system32\drivers\mouclass.sys	Kernel Driver No	Kernel Driver System	Kernel Driver Running	Kernel Driver OK	partmgr Kernel Driver No	Partition Manager Yes	c:\windows\system32\drivers\partmgr.sys	Kernel Driver Running	OK	Normal	No
mountmgr Kernel Driver No	Mount Point Manager Yes	c:\windows\system32\drivers\mountmgr.sys	Kernel Driver No	Kernel Driver Boot	Kernel Driver Running	Kernel Driver OK	pci Kernel Driver No	PCI Bus Driver Yes	c:\windows\system32\drivers\pci.sys	Kernel Driver Running	OK	Critical	No
mraid35x Disabled	mraid35x Stopped	Not Available OK	Kernel Driver No	Kernel Driver Normal	Kernel Driver No	No	pciide Driver Yes	PCIIde Yes	c:\windows\system32\drivers\pciide.sys	Kernel Running	OK	Normal	No
mrxdav Manual	WebDav Client Redirector Stopped	c:\windows\system32\drivers\mrxdav.sys	File System Manual	File System Driver OK	File System Driver Normal	No	pcmcia Driver No	Pemcia No	c:\windows\system32\drivers\pcmcia.sys	Kernel Running	OK	Normal	No
mrxsmb Driver Yes	MRXSMB Yes	c:\windows\system32\drivers\mrxsmb.sys	File System No	File System Driver System	File System Driver Running	File System Driver OK	pdcomp Manual	PDCOMP Stopped	Not Available OK	Kernel Driver Ignore	No	No	No
msfs Driver Yes	Msfs Yes	c:\windows\system32\drivers\msfs.sys	File System No	File System Driver System	File System Driver Running	File System Driver OK	pdframe No	PDFRAME Manual	Not Available Stopped	Kernel Driver Ignore	No	No	No
mup Driver Yes	Mup Yes	c:\windows\system32\drivers\mup.sys	File System No	File System Driver Boot	File System Driver Running	File System Driver OK	pdreli Manual	PDRELI Stopped	Not Available OK	Kernel Driver Ignore	No	No	No
ndis Kernel Driver No	NDIS System Driver Yes	c:\windows\system32\drivers\ndis.sys	Kernel Driver No	Kernel Driver Boot	Kernel Driver Running	Kernel Driver OK	pdrframe No	PDRFRAME Manual	Not Available Stopped	Kernel Driver Ignore	No	No	No
ndistapi Manual	Remote Access NDIS TAPI Driver Running	c:\windows\system32\drivers\ndistapi.sys	Kernel Driver Manual	Kernel Driver Running	Kernel Driver Normal	Kernel Driver Yes	perc2 Disabled	perc2 Stopped	Not Available OK	Kernel Driver Normal	No	No	No
ndisuio Manual	NDIS Usermode I/O Protocol Stopped	c:\windows\system32\drivers\ndisuio.sys	Kernel Driver Manual	Kernel Driver Running	Kernel Driver Normal	Kernel Driver No	perc2hib Disabled	perc2hib Stopped	Not Available OK	Kernel Driver Normal	No	No	No
ndiswan Manual	Remote Access NDIS WAN Driver Running	c:\windows\system32\drivers\ndiswan.sys	Kernel Driver Manual	Kernel Driver Running	Kernel Driver Normal	Kernel Driver Yes	pptpminiport Manual	WAN Miniport (PPTP) Running	c:\windows\system32\drivers\rasppptp.sys	Kernel Driver Running	OK	Normal	Yes
ndproxy Kernel Driver No	NDIS Proxy Yes	c:\windows\system32\drivers\ndproxy.sys	Kernel Driver No	Kernel Driver Manual	Kernel Driver Running	Kernel Driver OK	processor Kernel Driver No	Processor Driver Yes	c:\windows\system32\drivers\processr.sys	Kernel Driver Running	OK	Normal	No
netbios File System Driver No	NetBIOS Interface Yes	c:\windows\system32\drivers\netbios.sys	File System Driver No	File System Driver System	File System Driver Running	File System Driver OK	ptilink Manual	Direct Parallel Link Driver Running	c:\windows\system32\drivers\ptilink.sys	Kernel Driver Running	OK	Normal	Yes
netbt Kernel Driver No	NetBios over Tcpip Yes	c:\windows\system32\drivers\netbt.sys	Kernel Driver No	Kernel Driver System	Kernel Driver Running	Kernel Driver OK	ql1080 Disabled	ql1080 Stopped	Not Available OK	Kernel Driver Normal	No	No	No
							ql10wnt Disabled	Ql10wnt Stopped	Not Available OK	Kernel Driver Normal	No	No	No
							ql12160 Disabled	ql12160 Stopped	Not Available OK	Kernel Driver Normal	No	No	No

ql1240 Disabled	ql1240 Stopped	Not Available OK	Kernel Driver Normal	No No	No	srv Driver	Srv No	c:\windows\system32\drivers\srvc.sys	File System	No
ql1280 Disabled	ql1280 Stopped	Not Available OK	Kernel Driver Normal	No No	No	swenum Kernel Driver	Software Bus Driver Yes	c:\windows\system32\drivers\swenum.sys	Normal	No
ql2100 Disabled	ql2100 Stopped	Not Available OK	Kernel Driver Normal	No No	No	symc810 Disabled	symc810 Stopped	Not Available OK	Kernel Driver Normal	No
ql2200 Disabled	ql2200 Stopped	Not Available OK	Kernel Driver Normal	No No	No	symc8xx Disabled	symc8xx Stopped	Not Available OK	Kernel Driver Normal	No
ql2300 Disabled	ql2300 Stopped	Not Available OK	Kernel Driver Normal	No No	No	symmpi Disabled	symmpi Stopped	Not Available OK	Kernel Driver Normal	No
rasacd c:\windows\system32\drivers\rasacd.sys	Remote Access Auto Connection System Running	Auto OK	Connection Driver Kernel Driver	Normal No	Yes	sym_hi Disabled	sym_hi Stopped	Not Available OK	Kernel Driver Normal	No
rasl2tp c:\windows\system32\drivers\rasl2tp.sys	WAN Miniport (L2TP) Running	Miniport OK	Driver Kernel Driver	Normal No	Yes	sym_u3 Disabled	sym_u3 Stopped	Not Available OK	Kernel Driver Normal	No
rasppoe c:\windows\system32\drivers\rasppoe.sys	Remote Access PPPOE Driver Running	PPPOE OK	Driver Kernel Driver	Normal No	Yes	tcpip System	TCP/IP Protocol Driver Running	c:\windows\system32\drivers\tcpip.sys	Kernel Driver Normal	Yes
raspti Kernel Driver	Direct Parallel Yes	Parallel Manual	c:\windows\system32\drivers\raspti.sys	Kernel Driver Running	Normal	tdpipe Driver	TDPIPE No	c:\windows\system32\drivers\tdpipe.sys	Kernel Driver Stopped	Ignore
rdbss Driver	Rdbss Yes	c:\windows\system32\drivers\rdbss.sys	File System System	Running	OK	tdtcp Driver	TDTCP No	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver Stopped	Ignore
rdpedd Driver	RDPCDD Yes	c:\windows\system32\drivers\rdpedd.sys	Kernel Driver System	Running	Ignore	termdd System	Terminal Device Driver Running	c:\windows\system32\drivers\termdd.sys	Kernel Driver Normal	Yes
rdpdr Manual	Terminal Server Device Redirector Driver Running	Device Redirector OK	Driver Kernel Driver	Normal No	Yes	toside Disabled	TosIde Stopped	Not Available OK	Kernel Driver Normal	No
rdpwd Driver	RDPWD No	c:\windows\system32\drivers\rdpwd.sys	Kernel Driver Manual	Stopped	Ignore	udfs Driver	Udfs No	c:\windows\system32\drivers\udfs.sys	File System Disabled	Normal
redbook System	Digital CD Audio Playback Filter Driver Running	Filter Driver OK	Driver Kernel Driver	Normal No	Yes	ultra Disabled	ultra Stopped	Not Available OK	Kernel Driver Normal	No
s3savage4 Kernel Driver	S3SAVAGE4 Yes	c:\windows\system32\drivers\s3gsav4m.sys	Kernel Driver Manual	Running	Ignore	update Manual	Microcode Update Driver Running	c:\windows\system32\drivers\update.sys	Kernel Driver Normal	Yes
secdrv Driver	Secdrv No	c:\windows\system32\drivers\secdrv.sys	Kernel Driver Manual	Stopped	Normal	usbhub Kernel Driver	USB2 Enabled Hub Yes	c:\windows\system32\drivers\usbhub.sys	Kernel Driver Running	Normal
serial Driver	Serial No	c:\windows\system32\drivers\serial.sys	Kernel Driver Auto	Stopped	Ignore	usbhcsi Manual	Microsoft USB Open Host Controller Miniport Driver Running	c:\windows\system32\drivers\usbhcsi.sys	Kernel Driver Normal	Yes
sfloppy Driver	Sfloppy No	c:\windows\system32\drivers\sfloppy.sys	Kernel Driver System	Stopped	Ignore	vgasave System	VGA Display Controller. Running	c:\windows\system32\drivers\vga.sys	Kernel Driver Normal	Yes
simbad Disabled	Simbad Stopped	Not Available OK	Kernel Driver Normal	No No	No	viaide Disabled	ViaIde Stopped	Not Available OK	Kernel Driver Normal	No
sparrow Disabled	Sparrow Stopped	Not Available OK	Kernel Driver Normal	No No	No	volsnap Kernel Driver	Storage volumes Yes	c:\windows\system32\drivers\volsnap.sys	Kernel Driver Boot	Running



wanarp Remote Access IP ARP Driver  
 c:\windows\system32\drivers\wanarp.sys Kernel Driver Yes  
 Manual Running OK Normal No Yes

wdica WDICA Not Available Kernel Driver No  
 Manual Stopped OK Ignore No No

wlbs Network Load Balancing  
 c:\windows\system32\drivers\wlbs.sys Kernel Driver No  
 Manual Stopped OK Normal No No

[Signed Drivers]

Device Name	Signed	Device Class	Driver Version
Driver Date	Manufacturer	INF Name	Driver Name
Device ID			
Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available
Not Available	HTREE\ROOT\0		
ACPI Multiprocessor PC	No	COMPUTER	5.2.3718.0
10/1/2002 (Standard computers)	hal.inf	Not Available	
ROOT\ACPI_HAL\0000			
Microsoft ACPI-Compliant System	No	SYSTEM	5.2.3718.0
10/1/2002	Microsoft acpi.inf	Not Available	
ACPI_HAL\PNP0C08\0			
Processor	No	PROCESSOR	5.2.3718.0
10/1/2002 (Standard processor types)	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\0			
Processor	No	PROCESSOR	5.2.3718.0
10/1/2002 (Standard processor types)	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\1			
Processor	No	PROCESSOR	5.2.3718.0
10/1/2002 (Standard processor types)	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\2			
Processor	No	PROCESSOR	5.2.3718.0
10/1/2002 (Standard processor types)	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\3			
Processor	No	PROCESSOR	5.2.3718.0
10/1/2002 (Standard processor types)	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\4			
Processor	No	PROCESSOR	5.2.3718.0
10/1/2002 (Standard processor types)	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\5			
Processor	No	PROCESSOR	5.2.3718.0
10/1/2002 (Standard processor types)	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\6			
Processor	No	PROCESSOR	5.2.3718.0
10/1/2002 (Standard processor types)	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-_X86_FAMILY_15_MODEL_2\7			
PCI bus	No	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)	machine.inf	Not Available	
ACPI\PNP0A03\0			
PCI standard host CPU bridge	No	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)	machine.inf	Not Available	
PCI\VEN_1014&DEV_0302&SUBSYS_00000000&REV_02\3&267A616A&0&00			

S3 Graphics Inc. Savage4 (Microsoft Corporation) No DISPLAY  
 6.13.10.8013 8/20/2002 S3 Graphics, Inc. s3gsav4.inf  
 Not Available  
 PCI\VEN\_5333&DEV\_8A22&SUBSYS\_01C51014&REV\_06\3&267A616A&0&08

Default Monitor No MONITOR 5.1.2001.0 6/6/2001  
 (Standard monitor types) monitor.inf Not Available  
 DISPLAY\DEFAULT\_MONITOR\4&14985FB8&0&11223344&00&01

IBM eServer xSeries 360 PCI-X Hotplug Controller No SYSTEM  
 5.0.4.1 7/26/2002 IBM Corporation oem3.inf Not Available  
 PCI\VEN\_1014&DEV\_010F&SUBSYS\_01131014&REV\_00\3&267A616A&0&10

IBM Netfinity 10/100 Ethernet Adapter No NET 6.4.14.0  
 9/24/2002 Intel oem4.inf Not Available  
 PCI\VEN\_8086&DEV\_1229&SUBSYS\_024D1014&REV\_08\3&267A616A&0&18

Adaptec AIC-7892 Ultra160 PCI SCSI Card No SCSIADAPTER  
 5.2.3718.0 10/1/2002 Adaptec pnpscsi.inf Not Available  
 PCI\VEN\_9005&DEV\_008F&SUBSYS\_02011014&REV\_02\3&267A616A&0&20

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsdev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_YGHV3\_S2&REV\_04&B8ED1E8&0&090

Disk drive No DISKDRIVE 5.2.3718.0 10/1/2002 (Standard  
 disk drives) disk.inf Not Available  
 SCSI\DISK&VEN\_IBM-ESXS&PROD\_ST318305LC\_!#&REV\_B245\4&B8ED1E8&0&0C0

IBM eServer xSeries 360 PCI-X Hotplug Controller No SYSTEM  
 5.0.4.1 7/26/2002 IBM Corporation oem3.inf Not Available  
 PCI\VEN\_1014&DEV\_0246&SUBSYS\_02471014&REV\_00\3&267A616A&0&30

ServerWorks Champion OSB4 - SouthBridge 4 No SYSTEM  
 5.2.3718.0 10/1/2002 ServerWorks (RCC) machine.inf Not  
 Available  
 PCI\VEN\_1166&DEV\_0200&SUBSYS\_00000000&REV\_50\3&267A616A&0&78

ISAPNP Read Data Port No SYSTEM 5.2.3718.0 10/1/2002  
 (Standard system devices) machine.inf Not Available  
 ISAPNP\READDATAPORT\0

Motherboard resources No SYSTEM 5.2.3718.0 10/1/2002  
 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0C02\2

Standard 101/102-Key or Microsoft Natural PS/2 Keyboard No  
 KEYBOARD 5.2.3718.0 10/1/2002 (Standard keyboards) keyboard.inf  
 Not Available ACPI\PNP0303\4&23FD4C84&0

PS/2 Compatible Mouse No MOUSE 5.2.3718.0 10/1/2002  
 Microsoft msmouse.inf Not Available  
 ACPI\PNP0F13\4&23FD4C84&0

Standard floppy disk controller No FDC 5.2.3718.0 10/1/2002  
 (Standard floppy disk controllers) fdc.inf Not Available  
 ACPI\PNP0700\4&23FD4C84&0

Floppy disk drive No FLOPPYDISK 5.2.3718.0 10/1/2002  
 (Standard floppy disk drives) floppydisk.inf Not Available  
 FDC\GENERIC\_FLOPPY\_DRIVE\5&6B4DF42&0&0

Advanced programmable interrupt controller 10/1/2002 (Standard system devices) Available	No machine.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	ACPI\PNP0003\4&23FD4C84&0	SCSI\PROCESSOR&VEN_IBM&PROD_EXP300___S160&REV_D014\5&2A085BFF&0&0F0
Direct memory access controller (Standard system devices) Available	No machine.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	ACPI\PNP0200\4&23FD4C84&0	SCSI Processor Device IBM scsidev.inf Not Available SCSI\PROCESSOR&VEN_IBM&PROD_EXP300___S160&REV_D014\5&2A085BFF&0&1F0
System timer (Standard system devices) Available	No machine.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	ACPI\PNP0100\4&23FD4C84&0	Mylex Accelerated Driver Available 9/8/2000 Mylex oem1.inf Not Available SCSI\DISK&VEN_MYLEX&PROD_EXTREMERAIID_2000&REV_0700\5&2A085BFF&0&420
System CMOS/real time clock (Standard system devices) Available	No machine.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	ACPI\PNP0B00\4&23FD4C84&0	Mylex GAM Device scsidev.inf Not Available SYSTEM 5.2.3718.0 10/1/2002 Mylex SCSI\PROCESSOR&VEN_MYLEX&PROD_GAM_DEVICE&REV_\5&2A085BFF&0&660
System speaker (Standard system devices) Available	No machine.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	ACPI\PNP0800\4&23FD4C84&0	DEC 21154 PCI to PCI bridge DEC machine.inf Not Available SYSTEM 5.2.3718.0 10/1/2002 PCI\VEN_1011&DEV_0026&SUBSYS_00000000&REV_05\3&13C0B0C5&0&10
Motherboard resources (Standard system devices) Available	No machine.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	ACPI\PNP0C02\3	Mylex eXtremeRAID 2000 Controller 5.2.3718.0 10/1/2002 Mylex pnpscsi.inf Not Available SCSIADAPTER PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&30418910&0&4010
OSB4 IDE Controller ServerWorks PCI\VEN_1166&DEV_0211&SUBSYS_00000000&REV_00\3&267A616A&0&79	No mshdc.inf	HDC	5.2.3718.0	10/1/2002	(Standard IDE ATA/ATAPI controllers) Not Available	PCI\VEN_1166&DEV_0211&SUBSYS_00000000&REV_00\3&267A616A&0&79	SCSI Processor Device IBM scsidev.inf Not Available SYSTEM 5.2.3718.0 10/1/2002 SCSI\PROCESSOR&VEN_IBM&PROD_EXP300___S160&REV_D014\5&10BA78D&0&0F0
Primary IDE Channel IDE ATA/ATAPI controllers) PCI\VEN_1166&DEV_0211&SUBSYS_00000000&REV_00\3&267A616A&0&79	No mshdc.inf	HDC	5.2.3718.0	10/1/2002	(Standard IDE ATA/ATAPI controllers) Not Available	PCI\VEN_1166&DEV_0211&SUBSYS_00000000&REV_00\3&267A616A&0&79	SCSI Processor Device IBM scsidev.inf Not Available SYSTEM 5.2.3718.0 10/1/2002 SCSI\PROCESSOR&VEN_IBM&PROD_EXP300___S160&REV_D014\5&10BA78D&0&1F0
CD-ROM Drive (Standard CD-ROM drives) IDE\CDROMLG_CD-ROM_CRN-8245B_____1.13____\5&326853DD&0&0.0.0	No cdrom.inf	CDROM	5.2.3718.0	10/1/2002	(Standard CD-ROM drives) Not Available	IDE\CDROMLG_CD-ROM_CRN-8245B_____1.13____\5&326853DD&0&0.0.0	SCSI Processor Device IBM scsidev.inf Not Available SYSTEM 5.2.3718.0 10/1/2002 SCSI\PROCESSOR&VEN_IBM&PROD_EXP300___S160&REV_D014\5&10BA78D&0&2F0
Secondary IDE Channel (Standard IDE ATA/ATAPI controllers) PCI\VEN_1166&DEV_0211&SUBSYS_00000000&REV_00\3&267A616A&0&79	No mshdc.inf	HDC	5.2.3718.0	10/1/2002	(Standard IDE ATA/ATAPI controllers) Not Available	PCI\VEN_1166&DEV_0211&SUBSYS_00000000&REV_00\3&267A616A&0&79	Mylex Accelerated Driver Available 9/8/2000 Mylex oem1.inf Not Available SCSI\DISK&VEN_MYLEX&PROD_EXTREMERAIID_2000&REV_0700\5&10BA78D&0&400
ServerWorks (RCC) PCI to USB Open Host Controller 5.2.3718.0 10/1/2002 ServerWorks (RCC) PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_04\3&267A616A&0&7A	No usbport.inf	USB	5.2.3718.0	10/1/2002	(Standard USB Host Controller) Not Available	USB\ROOT_HUB\4&372644EA&0	Mylex GAM Device scsidev.inf Not Available SYSTEM 5.2.3718.0 10/1/2002 Mylex SCSI\PROCESSOR&VEN_MYLEX&PROD_GAM_DEVICE&REV_\5&10BA78D&0&660
USB Root Hub USB Host Controller) USB\ROOT_HUB\4&372644EA&0	No usbport.inf	USB	5.2.3718.0	10/1/2002	(Standard USB Host Controller) Not Available	USB\ROOT_HUB\4&372644EA&0	DEC 21154 PCI to PCI bridge DEC machine.inf Not Available SYSTEM 5.2.3718.0 10/1/2002 PCI\VEN_1011&DEV_0026&SUBSYS_00000000&REV_05\3&13C0B0C5&0&18
PCI bus (Standard system devices) ACPI\PNP0A03\1	No machine.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	ACPI\PNP0A03\1	Mylex eXtremeRAID 2000 Controller 5.2.3718.0 10/1/2002 Mylex pnpscsi.inf Not Available SCSIADAPTER PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&1A9D83F&0&4018
PCI standard host CPU bridge (Standard system devices) PCI\VEN_1014&DEV_0302&SUBSYS_00000000&REV_02\3&13C0B0C5&0&00	No machine.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	PCI\VEN_1014&DEV_0302&SUBSYS_00000000&REV_02\3&13C0B0C5&0&00	SCSI Processor Device IBM scsidev.inf Not Available SYSTEM 5.2.3718.0 10/1/2002 SCSI\PROCESSOR&VEN_IBM&PROD_EXP300___S160&REV_D014\5&180DBE2F&0&0F0
DEC 21154 PCI to PCI bridge DEC machine.inf PCI\VEN_1011&DEV_0026&SUBSYS_00000000&REV_05\3&13C0B0C5&0&08	No machine.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	PCI\VEN_1011&DEV_0026&SUBSYS_00000000&REV_05\3&13C0B0C5&0&08	SCSI Processor Device IBM scsidev.inf Not Available SYSTEM 5.2.3718.0 10/1/2002 SCSI\PROCESSOR&VEN_IBM&PROD_EXP300___S160&REV_D014\5&180DBE2F&0&1F0
Mylex eXtremeRAID 2000 Disk Array Controller SCSIADAPTER 9.0.4.0 9/8/2000 Mylex Available PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&1138865F&0&4008	No oem0.inf	Not Available					
SCSI Processor Device IBM scsidev.inf Not Available	No scsidev.inf	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) Not Available	ACPI\PNP0A03\1	

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&180DBE2F&0&2F0

Mylex Accelerated Driver No DISKDRIVE Not  
 Available 9/8/2000 Mylex oem1.inf Not Available  
 SCSI\DISK&VEN\_MYLEX&PROD\_EXTREMER RAID\_2000&REV\_0700\5&180DBE2F&0&400

Mylex GAM Device No SYSTEM 5.2.3718.0 10/1/2002 Mylex  
 scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_MYLEX&PROD\_GAM\_DEVICE&REV\_ \5&180DBE2F&0&660

DEC 21154 PCI to PCI bridge No SYSTEM 5.2.3718.0 10/1/2002  
 DEC machine.inf Not Available  
 PCI\VEN\_1011&DEV\_0026&SUBSYS\_00000000&REV\_05\3&13C0B0C5&0&20

Mylex eXtremeRAID 2000 Controller No SCSIADAPTER  
 5.2.3718.0 10/1/2002 Mylex pnpscsi.inf Not Available  
 PCI\VEN\_1069&DEV\_BA56&SUBSYS\_00401069&REV\_00\4&20B2DAF0&0&4020

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&1DED6135&0&0F0

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&1DED6135&0&1F0

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&1DED6135&0&2F0

Mylex Accelerated Driver No DISKDRIVE Not  
 Available 9/8/2000 Mylex oem1.inf Not Available  
 SCSI\DISK&VEN\_MYLEX&PROD\_EXTREMER RAID\_2000&REV\_0701\5&1DED6135&0&400

Mylex GAM Device No SYSTEM 5.2.3718.0 10/1/2002 Mylex  
 scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_MYLEX&PROD\_GAM\_DEVICE&REV\_ \5&1DED6135&0&660

PCI bus No SYSTEM 5.2.3718.0 10/1/2002 (Standard system  
 devices) machine.inf Not Available ACPI\PNP0A03\2

PCI standard host CPU bridge No SYSTEM 5.2.3718.0 10/1/2002  
 (Standard system devices) machine.inf Not Available  
 PCI\VEN\_1014&DEV\_0302&SUBSYS\_00000000&REV\_02\3&1070020&0&00

DEC 21154 PCI to PCI bridge No SYSTEM 5.2.3718.0 10/1/2002  
 DEC machine.inf Not Available  
 PCI\VEN\_1011&DEV\_0026&SUBSYS\_00000000&REV\_05\3&1070020&0&08

Mylex eXtremeRAID 2000 Controller No SCSIADAPTER  
 5.2.3718.0 10/1/2002 Mylex pnpscsi.inf Not Available  
 PCI\VEN\_1069&DEV\_BA56&SUBSYS\_00401069&REV\_00\4&235BDD1F&0&4008

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&22275B46&0&0F0

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&22275B46&0&1F0

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&22275B46&0&2F0

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&22275B46&0&3F0

Mylex Accelerated Driver No DISKDRIVE Not  
 Available 9/8/2000 Mylex oem1.inf Not Available  
 SCSI\DISK&VEN\_MYLEX&PROD\_EXTREMER RAID\_2000&REV\_0700\5&22275B46&0&400

Mylex GAM Device No SYSTEM 5.2.3718.0 10/1/2002 Mylex  
 scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_MYLEX&PROD\_GAM\_DEVICE&REV\_ \5&22275B46&0&660

DEC 21154 PCI to PCI bridge No SYSTEM 5.2.3718.0 10/1/2002  
 DEC machine.inf Not Available  
 PCI\VEN\_1011&DEV\_0026&SUBSYS\_00000000&REV\_05\3&1070020&0&10

Mylex eXtremeRAID 2000 Controller No SCSIADAPTER  
 5.2.3718.0 10/1/2002 Mylex pnpscsi.inf Not Available  
 PCI\VEN\_1069&DEV\_BA56&SUBSYS\_00401069&REV\_00\4&6CA15C9&0&4010

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&38B2B567&0&0F0

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&38B2B567&0&1F0

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&38B2B567&0&2F0

SCSI Processor Device No SYSTEM 5.2.3718.0 10/1/2002  
 IBM scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_IBM&PROD\_EXP300\_\_\_S160&REV\_D014\5&38B2B567&0&3F0

Mylex Accelerated Driver No DISKDRIVE Not  
 Available 9/8/2000 Mylex oem1.inf Not Available  
 SCSI\DISK&VEN\_MYLEX&PROD\_EXTREMER RAID\_2000&REV\_0700\5&38B2B567&0&400

Mylex GAM Device No SYSTEM 5.2.3718.0 10/1/2002 Mylex  
 scsidev.inf Not Available  
 SCSI\PROCESSOR&VEN\_MYLEX&PROD\_GAM\_DEVICE&REV\_ \5&38B2B567&0&660

Not Available Not Available Not Available Not  
 Available Not Available Not Available Not Available  
 Not Available ACPI\IBM37D4\2&DABA3FF&0

ACPI Fixed Feature Button No SYSTEM 5.2.3718.0 10/1/2002  
 (Standard system devices) machine.inf Not Available  
 ACPI\FIXEDBUTTON\2&DABA3FF&0

Logical Disk ManagerNo system devices) machine.inf ROOT\DMIO\0000	SYSTEM 5.2.3718.0 10/1/2002 (Standard Not Available	CRC Disk Filter Driver Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_CRCDISK\0000
Volume Manager system devices) machine.inf ROOT\FTDISK\0000	No SYSTEM 5.2.3718.0 10/1/2002 (Standard Not Available	dmboot Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_DMBOOT\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATUREF76AC3DFOFFSET7E 00LENGTH43BF94800	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	dmload Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_DMLOAD\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATURED15733E9OFFSET7E0 00LENGTH1D4F809400	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	Fips Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_FIPS\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATUREC89584AEOFFSET7E 0000LENGTHD70AD5600	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	Generic Packet Classifier Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_GPC\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATUREC89584AEOFFSET7E 12BD400LENGTH30D4483400	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	IPSEC driver Not Available Not Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_IPSEC\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATUREC89584AEOFFSETD7 12BD400LENGTH30D4483400	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	ksecdd Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_KSECDD\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATURE909C55D1OFFSET7E 0000LENGTHD70AD5600	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	macdisk Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_MACDISK\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATURE909C55D1OFFSETD7 12BD400LENGTH30D4483400	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	mmdd Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_MNMDD\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATURED2EC92AFOFFSET7E 0000LENGTH1FC0970A00	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	mountmgr Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_MOUNTMGR\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATURED2EC92AFOFFSET7E 0000LENGTH1FC0970A00	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	NDIS System Driver Not Available Not Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_NDIS\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATURE4130AFABOFFSET7E 0000LENGTH1252DA4200	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	Remote Access NDIS TAPI Driver LEGACYDRIVER Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_NDISTAPI\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATURE4130AFABOFFSET12 5358C000LENGTH30D4483400	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	NDIS Usermode I/O Protocol Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_NDISUIO\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATUREB1D6A863OFFSET7E 0000LENGTH1252DA4200	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	NDProxy Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_NDPROXY\0000
Generic volume volume.inf STORAGE\VOLUME\1&30A96598&0&SIGNATUREB1D6A863OFFSET12 5358C000LENGTH30D4483400	No VOLUME 5.2.3718.0 10/1/2002 Microsoft Not Available	NetBios over Tcpip Not Available Not Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_NETBT\0000
AFD Networking Support Environment LEGACYDRIVER Available ROOT\LEGACY_AFD\0000	Not Available Not Available Not Available	Null Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_NULL\0000
Beep Not Available Available ROOT\LEGACY_BEEP\0000	LEGACYDRIVER Not Available Not Available	Partition Manager Not Available Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available ROOT\LEGACY_PARTMGR\0000
		Remote Access Auto Connection Driver LEGACYDRIVER Available	Not Available Not Available Not Available	LEGACYDRIVER Not Available Not Available

Available	Not Available	Not Available		
ROOT\LEGACY_RASACD\0000				
RDPCCDD	Not Available	LEGACYDRIVER	Not Available	
Not Available	Not Available	Not Available	Not	
Available ROOT\LEGACY_RDPCCDD\0000				
TCP/IP Protocol Driver	Not Available	LEGACYDRIVER		
Not Available	Not Available	Not Available	Not	
Available Not Available ROOT\LEGACY_TCPIP\0000				
VGA Display Controller.	Not Available	LEGACYDRIVER		
Not Available	Not Available	Not Available	Not	
Available Not Available ROOT\LEGACY_VGASAVE\0000				
volsnap	Not Available	LEGACYDRIVER	Not Available	
Not Available	Not Available	Not Available	Not	
Available ROOT\LEGACY_VOLSNAP\0000				
Remote Access IP ARP Driver	Not Available	LEGACYDRIVER		
Not Available	Not Available	Not Available	Not	
Available Not Available ROOT\LEGACY_WANARP\0000				
Audio Codex	No	MEDIA	5.2.3718.0	10/1/2002 (Standard system devices)
wave.inf Not Available ROOT\MEDIA\MS_MMCMAC				
Legacy Audio Drivers	No	MEDIA	5.2.3718.0	10/1/2002 (Standard system devices)
wave.inf Not Available ROOT\MEDIA\MS_MMDRV				
Media Control Devices (Standard system devices)	No	MEDIA	5.2.3718.0	10/1/2002
wave.inf Not Available ROOT\MEDIA\MS_MMMCI				
Legacy Video Capture Devices (Standard system devices)	No	MEDIA	5.2.3718.0	10/1/2002
wave.inf Not Available ROOT\MEDIA\MS_MMVCD				
Video Codex	No	MEDIA	5.2.3718.0	10/1/2002 (Standard system devices)
wave.inf Not Available ROOT\MEDIA\MS_MMVID				
WAN Miniport (L2TP) Microsoft netrasa.inf	No	NET	5.2.3718.0	10/1/2002
Not Available ROOT\MS_L2TPMINIPORT\0000				
WAN Miniport (IP) Microsoft netrasa.inf	No	NET	5.2.3718.0	10/1/2002
Not Available ROOT\MS_NDISWANIP\0000				
WAN Miniport (PPPOE) Microsoft netrasa.inf	No	NET	5.2.3718.0	10/1/2002
Not Available ROOT\MS_PPPOEMINIPORT\0000				
WAN Miniport (PPTP) Microsoft netrasa.inf	No	NET	5.2.3718.0	10/1/2002
Not Available ROOT\MS_PPTPMINIPORT\0000				
Direct Parallel	No	NET	5.2.3718.0	10/1/2002
netrasa.inf Not Available ROOT\MS_PTMINIPORT\0000				
Terminal Server Device Redirector	No	SYSTEM	5.2.3718.0	10/1/2002
(Standard system devices) machine.inf Not Available ROOT\RDPDR\0000				
Terminal Server Keyboard Driver	No	SYSTEM	5.2.3718.0	10/1/2002
(Standard system devices) machine.inf Not Available ROOT\RDP_KBD\0000				
Terminal Server Mouse Driver	No	SYSTEM	5.2.3718.0	10/1/2002
(Standard system devices) machine.inf Not Available ROOT\RDP_MOU\0000				

Plug and Play Software Device Enumerator	No	SYSTEM	5.2.3718.0	10/1/2002
(Standard system devices) machine.inf Not Available ROOT\SYSTEM\0000				
Microcode Update Device	No	SYSTEM	5.2.3718.0	10/1/2002
(Standard system devices) machine.inf Not Available ROOT\SYSTEM\0001				
[Environment Variables]				
Variable	Value	User Name		
ClusterLog	C:\WINDOWS\Cluster\cluster.log			<SYSTEM>
ComSpec	%SystemRoot%\system32\cmd.exe			<SYSTEM>
NUMBER_OF_PROCESSORS	8			<SYSTEM>
OS	Windows_NT			<SYSTEM>
Path	%SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;C:\Program Files\Microsoft SQL Server\MSSQL\BINN;C:\Program Files\Microsoft SQL Server\80\Tools\BINN <SYSTEM>			
PATHEXT	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH			<SYSTEM>
PROCESSOR_ARCHITECTURE	x86			<SYSTEM>
PROCESSOR_IDENTIFIER	x86 Family 15 Model 2 Stepping 2, GenuineIntel			<SYSTEM>
PROCESSOR_LEVEL	15			<SYSTEM>
PROCESSOR_REVISION	0202			<SYSTEM>
TEMP	%SystemRoot%\TEMP			<SYSTEM>
TMP	%SystemRoot%\TEMP			<SYSTEM>
windir	%SystemRoot%			<SYSTEM>
TEMP	%USERPROFILE%\Local Settings\Temp	NT		AUTHORITY\SYSTEM
TMP	%USERPROFILE%\Local Settings\Temp	NT		AUTHORITY\SYSTEM
TEMP	%USERPROFILE%\Local Settings\Temp	NT		AUTHORITY\LOCAL SERVICE
TMP	%USERPROFILE%\Local Settings\Temp	NT		AUTHORITY\LOCAL SERVICE
TEMP	%USERPROFILE%\Local Settings\Temp	NT		AUTHORITY\NETWORK SERVICE
TMP	%USERPROFILE%\Local Settings\Temp	NT		AUTHORITY\NETWORK SERVICE
TEMP	%USERPROFILE%\Local Settings\Temp			IBMSERVER3\Administrator
TMP	%USERPROFILE%\Local Settings\Temp			IBMSERVER3\Administrator
[Print Jobs]				

Document Size	Owner	Notify	Status	Time Submitted
Start Time	Until Time	Elapsed Time	Pages Printed	Job ID
Priority	Parameters	Driver	Print Processor	Host Print Queue
Data Type	Name			

[Network Connections]

Local Name	Remote Name	Type	Status	User Name
X:	\\192.168.132.253\e\$	Disk	Current Connection	
	IBMSERVER3\Administrator			

[Running Tasks]

Name	Path	Process ID	Priority	Min Working Set	Max Working Set
Working Set	Start Time	Version	Size	File Date	
system idle process	Not Available	Not Available	0	0	Not Available
Available	Not Available	Not Available	Not Available	Not Available	
Not Available	Not Available				
system	Not Available	4	8	0	1413120
Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
Available					
smss.exe	c:\windows\system32\smss.exe	396	11	204800	
1413120	2/23/2003 10:57 AM	5.2.3718.0	(dnssrv.021114-1947)	46.50 KB	
(47,616 bytes)	11/15/2002 7:00 AM				
csrss.exe	Not Available	444	13	Not Available	
Not Available	2/23/2003 10:57 AM	Not Available	Not Available	Not Available	
Available	Not Available				
winlogon.exe	c:\windows\system32\winlogon.exe			468	
13	204800	1413120	2/23/2003 10:57 AM	5.2.3718.0	
(dnssrv.021114-1947)	524.00 KB (536,576 bytes)		11/15/2002 7:00 AM		
services.exe	c:\windows\system32\services.exe			512	9
204800	1413120	2/23/2003 10:57 AM	5.2.3718.0	(dnssrv.021114-1947)	
99.50 KB (101,888 bytes)	11/15/2002 7:00 AM				
lsass.exe	c:\windows\system32\lsass.exe	524	9	204800	
1413120	2/23/2003 10:57 AM	5.2.3718.0	(dnssrv.021114-1947)	13.00 KB	
(13,312 bytes)	11/15/2002 7:00 AM				
svchost.exe	c:\windows\system32\svchost.exe			692	8
204800	1413120	2/23/2003 10:57 AM	5.2.3718.0	(dnssrv.021114-1947)	
12.00 KB (12,288 bytes)	11/15/2002 7:00 AM				
svchost.exe	c:\windows\system32\svchost.exe			728	8
204800	1413120	2/23/2003 10:57 AM	5.2.3718.0	(dnssrv.021114-1947)	
12.00 KB (12,288 bytes)	11/15/2002 7:00 AM				
svchost.exe	Not Available	860	8	Not Available	
Available	Not Available	2/23/2003 10:57 AM	Not Available	Not Available	
Not Available	Not Available				
svchost.exe	c:\windows\system32\svchost.exe			892	8
204800	1413120	2/23/2003 10:57 AM	5.2.3718.0	(dnssrv.021114-1947)	
12.00 KB (12,288 bytes)	11/15/2002 7:00 AM				

msdtc.exe	Not Available	972	8	Not Available	
Not Available	2/23/2003 10:57 AM	Not Available	Not Available	Not Available	
Available	Not Available				
svchost.exe	c:\windows\system32\svchost.exe			1152	8
204800	1413120	2/23/2003 10:57 AM	5.2.3718.0	(dnssrv.021114-1947)	
12.00 KB (12,288 bytes)	11/15/2002 7:00 AM				
wmiprvse.exe	Not Available	1300	8	Not Available	
Available	Not Available	2/23/2003 10:58 AM	Not Available	Not Available	
Not Available	Not Available				
explorer.exe	c:\windows\explorer.exe			1532	8
204800	1413120	2/23/2003 11:05 AM	6.00.3718.0	(dnssrv.021114-1947)	
995.50 KB (1,019,392 bytes)	11/15/2002 7:00 AM				
cmd.exe	c:\windows\system32\cmd.exe	1716	8	204800	
1413120	2/23/2003 11:05 AM	5.2.3718.0	(dnssrv.021114-1947)	370.00 KB	
(378,880 bytes)	11/15/2002 7:00 AM				
wpabaln.exe	c:\windows\system32\wpabaln.exe			1944	8
204800	1413120	2/23/2003 11:07 AM	5.2.3718.0	(dnssrv.021114-1947)	
31.00 KB (31,744 bytes)	11/15/2002 7:00 AM				
cmd.exe	c:\windows\system32\cmd.exe	308	8	204800	
1413120	2/23/2003 3:29 PM	5.2.3718.0	(dnssrv.021114-1947)	370.00 KB	
(378,880 bytes)	11/15/2002 7:00 AM				
wmiprvse.exe	Not Available	1712	8	Not Available	
Available	Not Available	2/24/2003 7:39 AM	Not Available	Not Available	
Not Available	Not Available				
helpctr.exe	c:\windows\pchealth\helpctr\binaries\helpctr.exe			836	8
204800	1413120	2/24/2003 7:40 AM	5.2.3718.0	(dnssrv.021114-1947)	
734.50 KB (752,128 bytes)	1/27/2003 5:31 PM				
helpsvc.exe	c:\windows\pchealth\helpctr\binaries\helpsvc.exe			996	8
204800	1413120	2/24/2003 7:40 AM	5.2.3718.0	(dnssrv.021114-1947)	
686.50 KB (702,976 bytes)	1/27/2003 5:31 PM				

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer	Path
smss	5.2.3718.0	(dnssrv.021114-1947)	46.50 KB (47,616 bytes)		
	11/15/2002 7:00 AM	Microsoft Corporation			c:\windows\system32\smss.exe
ntdll	5.2.3718.0	(dnssrv.021114-1947)	708.00 KB (724,992 bytes)		
	11/15/2002 7:00 AM	Microsoft Corporation			c:\windows\system32\ntdll.dll
winlogon	5.2.3718.0	(dnssrv.021114-1947)	524.00 KB (536,576 bytes)		
	11/15/2002 7:00 AM	Microsoft Corporation			c:\windows\system32\winlogon.exe
kernel32	5.2.3718.0	(dnssrv.021114-1947)	949.00 KB (971,776 bytes)		
	11/15/2002 7:00 AM	Microsoft Corporation			c:\windows\system32\kernel32.dll
msvcrt	7.0.3718.0	(dnssrv.021114-1947)	319.50 KB (327,168 bytes)		
	11/15/2002 7:00 AM	Microsoft Corporation			c:\windows\system32\msvcrt.dll
advapi32	5.2.3718.0	(dnssrv.021114-1947)	534.00 KB (546,816 bytes)		
	11/15/2002 7:00 AM	Microsoft Corporation			c:\windows\system32\advapi32.dll

rpert4	5.2.3718.0 (dnsvr.021114-1947)	540.00 KB (552,960 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\rpert4.dll
user32	5.2.3718.0 (dnsvr.021114-1947)	552.50 KB (565,760 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\user32.dll
gdi32	5.2.3718.0 (dnsvr.021114-1947)	255.00 KB (261,120 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\gdi32.dll
userenv	5.2.3718.0 (dnsvr.021114-1947)	726.50 KB (743,936 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\userenv.dll
nddeapi	5.2.3718.0 (dnsvr.021114-1947)	15.50 KB (15,872 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\nddeapi.dll
crypt32	5.131.3718.0 (dnsvr.021114-1947)	534.50 KB (547,328 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\crypt32.dll
msasn1	5.2.3718.0 (dnsvr.021114-1947)	50.50 KB (51,712 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\msasn1.dll
secur32	5.2.3718.0 (dnsvr.021114-1947)	56.00 KB (57,344 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\secur32.dll
winsta	5.2.3718.0 (dnsvr.021114-1947)	48.50 KB (49,664 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\winsta.dll
netapi32	5.2.3718.0 (dnsvr.021114-1947)	311.50 KB (318,976 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\netapi32.dll
profmap	5.2.3718.0 (dnsvr.021114-1947)	21.50 KB (22,016 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\profmap.dll
regapi	5.2.3718.0 (dnsvr.021114-1947)	47.50 KB (48,640 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\regapi.dll
ws2_32	5.2.3718.0 (dnsvr.021114-1947)	75.00 KB (76,800 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ws2_32.dll
ws2help	5.2.3718.0 (dnsvr.021114-1947)	19.00 KB (19,456 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ws2help.dll
psapi	5.2.3718.0 (dnsvr.021114-1947)	21.00 KB (21,504 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\psapi.dll
version	5.2.3718.0 (dnsvr.021114-1947)	16.50 KB (16,896 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\version.dll
setupapi	5.2.3718.0 (dnsvr.021114-1947)	999.00 KB (1,022,976 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\setupapi.dll
msgina	5.2.3718.0 (dnsvr.021114-1947)	1.13 MB (1,186,304 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\msgina.dll
shsvcs	6.00.3718.0 (dnsvr.021114-1947)	121.50 KB (124,416 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\shsvcs.dll
shlwapi	6.00.3718.0 (dnsvr.021114-1947)	272.00 KB (278,528 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\shlwapi.dll
sfc	5.2.3718.0 (dnsvr.021114-1947)	4.50 KB (4,608 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\sfc.dll
sfc_os	5.2.3718.0 (dnsvr.021114-1947)	133.00 KB (136,192 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\sfc_os.dll
wintrust	5.131.3718.0 (dnsvr.021114-1947)	159.50 KB (163,328 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wintrust.dll
ole32	5.2.3718.0 (dnsvr.021114-1947)	1.09 MB (1,139,200 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ole32.dll
imagehlp	5.2.3718.0 (dnsvr.021114-1947)	136.50 KB (139,776 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\imagehlp.dll
comctl32	6.0 (dnsvr.021114-1947)	907.00 KB (928,768 bytes)	1/27/2003 12:00 PM	Microsoft Corporation	c:\windows\winsxs\x86_microsoft.windows.common-controls_6595b64144ccf1df_6.0.100.0_x-ww_8417450b\comctl32.dll
winscard	5.2.3718.0 (dnsvr.021114-1947)	94.00 KB (96,256 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\winscard.dll
wtsapi32	5.2.3718.0 (dnsvr.021114-1947)	17.00 KB (17,408 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wtsapi32.dll
sxs	5.2.3718.0 (dnsvr.021114-1947)	714.00 KB (731,136 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\sxs.dll
winmm	5.2.3718.0 (dnsvr.021114-1947)	162.50 KB (166,400 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\winmm.dll
shell32	6.00.3718.0 (dnsvr.021114-1947)	7.77 MB (8,152,064 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\shell32.dll
wldap32	5.2.3718.0 (dnsvr.021114-1947)	137.00 KB (140,288 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wldap32.dll
rsaenh	5.2.3718.0 (dnsvr.021114-1947)	177.07 KB (181,320 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\rsaenh.dll
csdll	5.2.3718.0 (dnsvr.021114-1947)	93.50 KB (95,744 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\csdll.dll
wlnotify	5.2.3718.0 (dnsvr.021114-1947)	86.00 KB (88,064 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wlnotify.dll
winspool	5.2.3718.0 (dnsvr.021114-1947)	135.00 KB (138,240 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\winspool.drv

mpr	5.2.3718.0 (dnsvr.021114-1947)	55.00 KB (56,320 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\mpr.dll
comctl32	5.82 (dnsvr.021114-1947)	561.00 KB (574,464 bytes)	1/27/2003 12:00 PM	Microsoft Corporation	c:\windows\winsxs\x86_microsoft.windows.common-controls_6595b64144ccf1df_5.82.0.0_x-ww_8a69ba05\comctl32.dll
uxtheme	6.00.3718.0 (dnsvr.021114-1947)	191.50 KB (196,096 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\uxtheme.dll
mprapi	5.2.3718.0 (dnsvr.021114-1947)	77.50 KB (79,360 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\mprapi.dll
activeds	5.2.3718.0 (dnsvr.021114-1947)	182.50 KB (186,880 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\activeds.dll
adslrpc	5.2.3718.0 (dnsvr.021114-1947)	138.50 KB (141,824 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\adslrpc.dll
credui	5.2.3718.0 (dnsvr.021114-1947)	158.50 KB (162,304 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\credui.dll
atl	3.05.2283	83.00 KB (84,992 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\atl.dll
oleaut32	5.2.3718.0	485.00 KB (496,640 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\oleaut32.dll
rtutils	5.2.3718.0 (dnsvr.021114-1947)	31.50 KB (32,256 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\rtutils.dll
samlib	5.2.3718.0 (dnsvr.021114-1947)	41.00 KB (41,984 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\samlib.dll
cscui	5.2.3718.0 (dnsvr.021114-1947)	300.00 KB (307,200 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\cscui.dll
clbcatq	2001.12.4648.0 (dnsvr.021114-1947)	469.00 KB (480,256 bytes)	1/27/2003 5:26 PM	Microsoft Corporation	c:\windows\system32\clbcatq.dll
comres	2001.12.4648.0 (dnsvr.021114-1947)	778.00 KB (796,672 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\comres.dll
ntmarta	5.2.3718.0 (dnsvr.021114-1947)	111.50 KB (114,176 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ntmarta.dll
wbemprox	5.2.3718.0 (dnsvr.021114-1947)	16.50 KB (16,896 bytes)	1/27/2003 5:26 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemprox.dll
wbemcomn	5.2.3718.0 (dnsvr.021114-1947)	202.50 KB (207,360 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemcomn.dll
wbemsvc	5.2.3718.0 (dnsvr.021114-1947)	42.00 KB (43,008 bytes)	1/27/2003 5:26 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemsvc.dll
fastprox	5.2.3718.0 (dnsvr.021114-1947)	442.00 KB (452,608 bytes)	1/27/2003 5:26 PM	Microsoft Corporation	c:\windows\system32\wbem\fastprox.dll
msvcpl60	6.05.2144.0	388.00 KB (397,312 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\msvcpl60.dll
ntdsapi	5.2.3718.0 (dnsvr.021114-1947)	67.00 KB (68,608 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ntdsapi.dll
dnsapi	5.2.3718.0 (dnsvr.021114-1947)	146.00 KB (149,504 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\dnsapi.dll
services	5.2.3718.0 (dnsvr.021114-1947)	99.50 KB (101,888 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\services.exe
scesrv	5.2.3718.0 (dnsvr.021114-1947)	311.50 KB (318,976 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\scesrv.dll
authz	5.2.3718.0 (dnsvr.021114-1947)	61.00 KB (62,464 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\authz.dll
umpnpgmr	5.2.3718.0 (dnsvr.021114-1947)	119.50 KB (122,368 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\umpnpgmr.dll
ncobjapi	5.2.3718.0 (dnsvr.021114-1947)	32.50 KB (33,280 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ncobjapi.dll
eventlog	5.2.3718.0 (dnsvr.021114-1947)	58.50 KB (59,904 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\eventlog.dll
lsass	5.2.3718.0 (dnsvr.021114-1947)	13.00 KB (13,312 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\lsass.exe
lsasrv	5.2.3718.0 (dnsvr.021114-1947)	715.50 KB (732,672 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\lsasrv.dll
samsrv	5.2.3718.0 (dnsvr.021114-1947)	412.50 KB (422,400 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\samsrv.dll
cryptdll	5.2.3718.0 (dnsvr.021114-1947)	29.00 KB (29,696 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\cryptdll.dll
msprivs	5.2.3718.0 (dnsvr.021114-1947)	45.50 KB (46,592 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\msprivs.dll
kerberos	5.2.3718.0 (dnsvr.021114-1947)	305.50 KB (312,832 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\kerberos.dll
msv1_0	5.2.3718.0 (dnsvr.021114-1947)	114.00 KB (116,736 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\msv1_0.dll
netlogon	5.2.3718.0 (dnsvr.021114-1947)	404.00 KB (413,696 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\netlogon.dll



w32time 5.2.3718.0 (dnsrv.021114-1947) 210.50 KB (215,552 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\w32time.dll	icaapi 5.2.3718.0 (dnsrv.021114-1947) 10.00 KB (10,240 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\icaapi.dll
iphlpapi 5.2.3718.0 (dnsrv.021114-1947) 81.00 KB (82,944 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\iphlpapi.dll	mstlsapi 5.2.3718.0 (dnsrv.021114-1947) 104.00 KB (106,496 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\mstlsapi.dll
schannel 5.2.3718.0 (dnsrv.021114-1947) 145.00 KB (148,480 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\schannel.dll	wkssvc 5.2.3718.0 (dnsrv.021114-1947) 123.00 KB (125,952 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\wkssvc.dll
wdigest 5.2.3718.0 (dnsrv.021114-1947) 61.00 KB (62,464 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\wdigest.dll	wiarpc 5.2.3718.0 (dnsrv.021114-1947) 30.00 KB (30,720 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\wiarpc.dll
rassfm 5.2.3718.0 (dnsrv.021114-1947) 20.50 KB (20,992 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\rassfm.dll	dmserver 5.2.3718.0 (dnsrv.021114-1947) 23.50 KB (24,064 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\dmserver.dll
kdcsvc 5.2.3718.0 (dnsrv.021114-1947) 203.00 KB (207,872 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\kdcsvc.dll	wmisvc 5.2.3718.0 (dnsrv.021114-1947) 131.50 KB (134,656 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\wbem\wmisvc.dll
ntdsa 5.2.3718.0 (dnsrv.021114-1947) 1.31 MB (1,376,256 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\ntdsa.dll	vssapi 5.2.3718.0 (dnsrv.021114-1947) 526.00 KB (538,624 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\vssapi.dll
ntdsatq 5.2.3718.0 (dnsrv.021114-1947) 27.50 KB (28,160 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\ntdsatq.dll	es 2001.12.4648.0 (dnsrv.021114-1947) 221.00 KB (226,304 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\es.dll
msocket 5.2.3718.0 (dnsrv.021114-1947) 226.00 KB (231,424 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\msocket.dll	comsvcs 2001.12.4648.0 (dnsrv.021114-1947) 1.11 MB (1,160,704 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\comsvcs.dll
esent 5.2.3718.0 (dnsrv.021114-1947) 920.50 KB (942,592 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\esent.dll	sens 5.2.3718.0 (dnsrv.021114-1947) 35.00 KB (35,840 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\sens.dll
scecli 5.2.3718.0 (dnsrv.021114-1947) 176.00 KB (180,224 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\scecli.dll	wbemcore 5.2.3718.0 (dnsrv.021114-1947) 453.50 KB (464,384 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\wbem\wbemcore.dll
wshtcpip 5.2.3718.0 (dnsrv.021114-1947) 17.50 KB (17,920 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\wshtcpip.dll	esscli 5.2.3718.0 (dnsrv.021114-1947) 232.50 KB (238,080 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\wbem\esscli.dll
pstorsvc 5.2.3718.0 (dnsrv.021114-1947) 24.00 KB (24,576 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\pstorsvc.dll	wmiutils 5.2.3718.0 (dnsrv.021114-1947) 90.00 KB (92,160 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\wbem\wmiutils.dll
psbase 5.2.3718.0 (dnsrv.021114-1947) 83.00 KB (84,992 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\psbase.dll	repdrvfs 5.2.3718.0 (dnsrv.021114-1947) 165.50 KB (169,472 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\wbem\repdrvfs.dll
dssenh 5.2.3718.0 (dnsrv.021114-1947) 131.07 KB (134,216 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\dssenh.dll	wmiprvsd 5.2.3718.0 (dnsrv.021114-1947) 405.50 KB (415,232 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\wbem\wmiprvsd.dll
svchost 5.2.3718.0 (dnsrv.021114-1947) 12.00 KB (12,288 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\svchost.exe	wbemess 5.2.3718.0 (dnsrv.021114-1947) 255.00 KB (261,120 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\wbem\wbemess.dll
rpss 5.2.3718.0 (dnsrv.021114-1947) 268.50 KB (274,944 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\rpss.dll	ncprov 5.2.3718.0 (dnsrv.021114-1947) 43.00 KB (44,032 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\wbem\ncprov.dll
termsrv 5.2.3718.0 (dnsrv.021114-1947) 215.00 KB (220,160 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\termsrv.dll	netman 5.2.3718.0 (dnsrv.021114-1947) 200.00 KB (204,800 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\netman.dll

rasapi32 5.2.3718.0 (dnsvr.021114-1947) 219.50 KB (224,768 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\rasapi32.dll	apphelp 5.2.3718.0 (dnsvr.021114-1947) 120.00 KB (122,880 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\apphelp.dll
rasman 5.2.3718.0 (dnsvr.021114-1947) 55.00 KB (56,320 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\rasman.dll	themeui 6.00.3718.0 (dnsvr.021114-1947) 360.50 KB (369,152 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\themeui.dll
tapi32 5.2.3718.0 (dnsvr.021114-1947) 170.50 KB (174,592 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\tapi32.dll	msimg32 5.2.3718.0 (dnsvr.021114-1947) 4.50 KB (4,608 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\msimg32.dll
wzcsvc 5.2.3718.0 (dnsvr.021114-1947) 272.50 KB (279,040 bytes) 11/15/2002 10:36 AM Microsoft Corporation c:\windows\system32\wzcsvc.dll	linkinfo 5.2.3718.0 (dnsvr.021114-1947) 15.50 KB (15,872 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\linkinfo.dll
wmi 5.2.3718.0 (dnsvr.021114-1947) 6.50 KB (6,656 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\wmi.dll	ntshrui 6.00.3718.0 (dnsvr.021114-1947) 134.50 KB (137,728 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\ntshrui.dll
dhcpcsvc 5.2.3718.0 (dnsvr.021114-1947) 100.50 KB (102,912 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\dhcpcsvc.dll	webcheck 6.00.3718.0 (dnsvr.021114-1947) 256.00 KB (262,144 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\webcheck.dll
wzcsapi 5.2.3718.0 (dnsvr.021114-1947) 24.00 KB (24,576 bytes) 11/15/2002 10:36 AM Microsoft Corporation c:\windows\system32\wzcsapi.dll	wsock32 5.2.3718.0 (dnsvr.021114-1947) 22.00 KB (22,528 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\wsock32.dll
netshell 5.2.3718.0 (dnsvr.021114-1947) 1.64 MB (1,721,856 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\netshell.dll	stobject 5.2.3718.0 (dnsvr.021114-1947) 117.00 KB (119,808 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\stobject.dll
clusapi 5.2.3718.0 (dnsvr.021114-1947) 54.50 KB (55,808 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\clusapi.dll	batmeter 6.00.3718.0 (dnsvr.021114-1947) 28.00 KB (28,672 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\batmeter.dll
hnetcfg 5.2.3718.0 (dnsvr.021114-1947) 243.50 KB (249,344 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\hnetcfg.dll	powrprof 6.00.3718.0 (dnsvr.021114-1947) 14.00 KB (14,336 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\powrprof.dll
wininet 6.00.3718.0 (dnsvr.021114-1947) 591.50 KB (605,696 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\wininet.dll	urlmon 6.00.3718.0 (dnsvr.021114-1947) 457.50 KB (468,480 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\urlmon.dll
rasdlg 5.2.3718.0 (dnsvr.021114-1947) 640.50 KB (655,872 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\rasdlg.dll	printui 5.2.3718.0 (dnsvr.021114-1947) 527.00 KB (539,648 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\printui.dll
rasadhlp 5.2.3718.0 (dnsvr.021114-1947) 6.00 KB (6,144 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\rasadhlp.dll	cfgmgr32 5.2.3718.0 (dnsvr.021114-1947) 17.00 KB (17,408 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\cfgmgr32.dll
pchsvc 5.2.3718.0 (dnsvr.021114-1947) 30.00 KB (30,720 bytes) 1/27/2003 5:31 PM Microsoft Corporation c:\windows\pchealth\helpctr\binaries\pchsvc.dll	ntlanman 5.2.3718.0 (dnsvr.021114-1947) 39.50 KB (40,448 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\ntlanman.dll
wbemcons 5.2.3718.0 (dnsvr.021114-1947) 69.00 KB (70,656 bytes) 1/27/2003 5:26 PM Microsoft Corporation c:\windows\system32\wbem\wbemcons.dll	netui0 5.2.3718.0 (dnsvr.021114-1947) 73.00 KB (74,752 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\netui0.dll
ersvc 5.2.3718.0 (dnsvr.021114-1947) 22.00 KB (22,528 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\ersvc.dll	netui1 5.2.3718.0 (dnsvr.021114-1947) 177.00 KB (181,248 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\netui1.dll
explorer 6.00.3718.0 (dnsvr.021114-1947) 995.50 KB (1,019,392 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\explorer.exe	davclnt 5.2.3718.0 (dnsvr.021114-1947) 23.00 KB (23,552 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\davclnt.dll
browseui 6.00.3718.0 (dnsvr.021114-1947) 1,009.00 KB (1,033,216 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\browseui.dll	drprov 5.2.3718.0 (dnsvr.021114-1947) 11.50 KB (11,776 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\drprov.dll
shdocvw 6.00.3718.0 (dnsvr.021114-1947) 1.30 MB (1,358,336 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\shdocvw.dll	

browselc 6.00.3718.0 (dnsvr.021114-1947) 61.50 KB (62,976 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\browselc.dll

shdoclc 6.00.3718.0 (dnsvr.021114-1947) 521.00 KB (533,504 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\shdoclc.dll

mprui 5.2.3718.0 (dnsvr.021114-1947) 47.50 KB (48,640 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\mprui.dll

netui2 5.2.3718.0 (dnsvr.021114-1947) 300.00 KB (307,200 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\netui2.dll

comdlg32 6.00.3718.0 (dnsvr.021114-1947) 257.00 KB (263,168 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\comdlg32.dll

netmsg 5.2.3718.0 (dnsvr.021114-1947) 178.00 KB (182,272 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\netmsg.dll

netplwiz 5.2.3718.0 (dnsvr.021114-1947) 843.00 KB (863,232 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\netplwiz.dll

cmd 5.2.3718.0 (dnsvr.021114-1947) 370.00 KB (378,880 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\cmd.exe

wpabaln 5.2.3718.0 (dnsvr.021114-1947) 31.00 KB (31,744 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\wpabaln.exe

helpctr 5.2.3718.0 (dnsvr.021114-1947) 734.50 KB (752,128 bytes) 1/27/2003 5:31 PM Microsoft Corporation c:\windows\pchealth\helpctr\binaries\helpctr.exe

hcappres 5.2.3718.0 (dnsvr.021114-1947) 6.50 KB (6,656 bytes) 1/27/2003 5:31 PM Microsoft Corporation c:\windows\pchealth\helpctr\binaries\hcappres.dll

itss 5.2.3718.0 (dnsvr.021114-1947) 119.50 KB (122,368 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\itss.dll

msxml3 8.40.9214.0 1.06 MB (1,108,992 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\msxml3.dll

pchshell 5.2.3718.0 (dnsvr.021114-1947) 97.00 KB (99,328 bytes) 1/27/2003 5:31 PM Microsoft Corporation c:\windows\pchealth\helpctr\binaries\pchshell.dll

mlang 6.00.3718.0 (dnsvr.021114-1947) 566.50 KB (580,096 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\mlang.dll

mshtml 6.00.3718.0 (dnsvr.021114-1947) 2.71 MB (2,837,504 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\mshtml.dll

msimtf 5.2.3718.0 (dnsvr.021114-1947) 142.50 KB (145,920 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\msimtf.dll

msctf 5.2.3718.0 (dnsvr.021114-1947) 276.00 KB (282,624 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\msctf.dll

jscrip 5.6.0.8028 424.00 KB (434,176 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\jscrip.dll

msls31 3.10.349.0 144.00 KB (147,456 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\msls31.dll

imm32 5.2.3718.0 (dnsvr.021114-1947) 103.50 KB (105,984 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\imm32.dll

mshtml 6.00.3718.0 (dnsvr.021114-1947) 434.00 KB (444,416 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\mshtml.dll

vbscript 5.6.0.8028 388.00 KB (397,312 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\vbscript.dll

mfc42 6.05.2283.0 960.00 KB (983,040 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\mfc42.dll

msinfo 5.2.3718.0 (dnsvr.021114-1947) 358.50 KB (367,104 bytes) 1/27/2003 5:31 PM Microsoft Corporation c:\windows\pchealth\helpctr\binaries\msinfo.dll

mfc42u 6.05.2283.0 960.00 KB (983,040 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\mfc42u.dll

riched32 5.2.3718.0 (dnsvr.021114-1947) 3.50 KB (3,584 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\riched32.dll

riched20 5.31.23.1218 395.00 KB (404,480 bytes) 11/15/2002 7:00 AM Microsoft Corporation c:\windows\system32\riched20.dll

helpsvc 5.2.3718.0 (dnsvr.021114-1947) 686.50 KB (702,976 bytes) 1/27/2003 5:31 PM Microsoft Corporation c:\windows\pchealth\helpctr\binaries\helpsvc.exe

[Services]

Display Name	Name	State	Start Name	Mode	Service Type
Path	Error Control	Start	Tag	ID	
Alerter	Alerter	Stopped	Manual	Share Process	
c:\windows\system32\svchost.exe	-k local	service		Normal	NT AUTHORITY\LocalService 0
Application Layer Gateway Service		ALG	Stopped	Manual	
Own Process	c:\windows\system32\alg.exe		Normal	NT AUTHORITY\LocalService 0	
Application Management	AppMgmt	Stopped	Manual	Share Process	
c:\windows\system32\svchost.exe	-k netsvc	Normal	LocalSystem	0	
Windows Audio	AudioSrv	Stopped	Disabled	Share Process	
c:\windows\system32\svchost.exe	-k netsvc	Normal	LocalSystem	0	
Background Intelligent Transfer Service	BITS	Stopped	Manual	Share Process	
c:\windows\system32\svchost.exe	-k netsvc	Normal	LocalSystem	0	
Computer Browser	Browser	Stopped	Manual	Share Process	
c:\windows\system32\svchost.exe	-k netsvc	Normal	LocalSystem	0	
Indexing Service	CiSvc	Stopped	Manual	Share Process	
c:\windows\system32\cisvc.exe	Normal	LocalSystem	0		
ClipBook	ClipSrv	Stopped	Disabled	Own Process	
c:\windows\system32\clipsrv.exe	Normal	LocalSystem	0		
COM+ System Application	COMSysApp	Stopped	Manual	Own Process	
c:\windows\system32\dlhst.exe					



Routing and Remote Access Share Process LocalSystem	RemoteAccess c:\windows\system32\svchost.exe -k netsvcs 0	Stopped	Disabled	Normal	0	Terminal Services Process LocalSystem	TermService c:\windows\system32\svchost.exe -k termsvcs 0	Running	Manual	Share Normal	0
Remote Registry Process AUTHORITY\LocalService	RemoteRegistry c:\windows\system32\svchost.exe -k regsvcs 0	Stopped	Manual	Share Normal NT	0	Themes Process LocalSystem	Themes c:\windows\system32\svchost.exe -k netsvcs 0	Stopped	Disabled	Share Normal LocalSystem	0
Remote Procedure Call (RPC) Manual NT AUTHORITY\NetworkService	Locator RpcLocator c:\windows\system32\locator.exe 0	Stopped	Manual	Share Normal	0	Telnet Process LocalSystem	TlntSvr c:\windows\system32\tlntsvr.exe 0	Stopped	Disabled	Own NT AUTHORITY\LocalService	0
Remote Procedure Call (RPC) Process LocalSystem	RpcSs c:\windows\system32\svchost.exe -k rpcss 0	Running	Auto	Share Normal	0	Distributed Link Tracking Server Process LocalSystem	TrkSvr c:\windows\system32\svchost.exe -k netsvcs 0	Stopped	Disabled	Share Normal	0
Resultant Set of Policy Provider Process LocalSystem	RSOPProv c:\windows\system32\rsopprov.exe 0	Stopped	Manual	Share Normal	0	Distributed Link Tracking Client Process LocalSystem	TrkWks c:\windows\system32\svchost.exe -k netsvcs 0	Stopped	Manual	Share Normal	0
Special Administration Console Share Process LocalSystem	Helper sacsvr c:\windows\system32\svchost.exe -k netsvcs 0	Stopped	Manual	Share Normal	0	Terminal Services Session Directory Own Process LocalSystem	Tssdis c:\windows\system32\tssdis.exe 0	Stopped	Disabled	Share Normal	0
Security Accounts Manager Process 0	SamSs c:\windows\system32\lsass.exe	Running	Auto	Share LocalSystem	0	Upload Manager Process LocalSystem	uploadmgr c:\windows\system32\svchost.exe -k netsvcs 0	Stopped	Manual	Share Normal LocalSystem	0
Smart Card c:\windows\system32\scardsvr.exe AUTHORITY\LocalService	SCardSvr c:\windows\system32\scardsvr.exe 0	Stopped	Manual	Share Process Normal NT	0	Uninterruptible Power Supply Process 0	UPS c:\windows\system32\ups.exe	Stopped	Manual	Own LocalSystem	0
Task Scheduler c:\windows\system32\svchost.exe	Schedule c:\windows\system32\svchost.exe -k netsvcs	Stopped	Manual	Share Process LocalSystem	0	Virtual Disk Service c:\windows\system32\vds.exe	vds 0	Stopped	Manual	Own Process LocalSystem	0
Secondary Logon c:\windows\system32\svchost.exe	seclogon c:\windows\system32\svchost.exe -k netsvcs	Stopped	Manual	Share Process LocalSystem	0	Volume Shadow Copy Process 0	VSS c:\windows\system32\vssvc.exe	Stopped	Manual	Own LocalSystem	0
System Event Notification Process LocalSystem	SENS c:\windows\system32\svchost.exe -k netsvcs 0	Running	Manual	Share Normal	0	Windows Time c:\windows\system32\svchost.exe	W32Time c:\windows\system32\svchost.exe -k netsvcs	Running	Auto	Share Process LocalSystem	0
Internet Connection Firewall (ICF) / SharedAccess c:\windows\system32\svchost.exe	Internet Connection Sharing (ICS) Stopped c:\windows\system32\svchost.exe -k netsvcs	Disabled	Share	Process Normal LocalSystem	0	WebClient Process LocalSystem	WebClient c:\windows\system32\svchost.exe -k localservice 0	Stopped	Disabled	Share Normal NT AUTHORITY\LocalService	0
Shell Hardware Detection Share Process LocalSystem	ShellHWDetection c:\windows\system32\svchost.exe -k netsvcs 0	Running	Auto	Ignore	0	WinHTTP Web Proxy Auto-Discovery Service Stopped Manual Normal	WinHttpAutoProxySvc c:\windows\system32\svchost.exe -k localservice	Auto-Discovery	Service	WinHttpAutoProxySvc c:\windows\system32\svchost.exe -k localservice	0
Print Spooler c:\windows\system32\spoolsv.exe	Spooler 0	Stopped	Manual	Own Process LocalSystem	0	Windows Management Instrumentation Share Process LocalSystem	winmgmt c:\windows\system32\svchost.exe -k netsvcs 0	Running	Auto	Ignore	0
SQLSERVERAGENT Manual Normal	SQLSERVERAGENT c:\progra~1\microso~1\mssql\binn\sqlagent.exe 0	Stopped	Manual	Share Normal	0	Portable Media Serial Number Service Manual Normal	WmdmPmSN c:\windows\system32\svchost.exe -k netsvcs 0	Stopped	Manual	Share Process LocalSystem	0
Windows Image Acquisition (WIA) Share Process NT AUTHORITY\LocalService	stisvc c:\windows\system32\svchost.exe -k imgsvc 0	Stopped	Manual	Share Normal	0	Windows Management Instrumentation Driver Extensions Stopped Manual Normal	Wmi c:\windows\system32\svchost.exe -k netsvcs	Running	Auto	Ignore	0
Microsoft Software Shadow Copy Provider Own Process LocalSystem	swprv c:\windows\system32\svchost.exe -k swprv 0	Stopped	Manual	Share Normal	0	WMI Performance Adapter Own Process LocalSystem	WmiApSrv c:\windows\system32\wbem\wmiaprv.exe 0	Stopped	Manual	Share Process LocalSystem	0
Performance Logs and Alerts Own Process NT Authority\NetworkService	SysmonLog c:\windows\system32\smlogsvc.exe 0	Stopped	Manual	Share Normal	0	Automatic Updates c:\windows\system32\svchost.exe	wuauerv c:\windows\system32\svchost.exe -k netsvcs	Stopped	Manual	Share Process LocalSystem	0
Telephony TapiSrv c:\windows\system32\svchost.exe	TapiSrv c:\windows\system32\svchost.exe -k tapisrv	Stopped	Manual	Share Process LocalSystem	0	Wireless Configuration Process LocalSystem	WZCSVC c:\windows\system32\svchost.exe -k netsvcs 0	Stopped	Manual	Share Normal	0
						[Program Groups]					

Group Name	Name	User Name
Accessories	Default User:Accessories	Default User
Accessories\Accessibility	Default User:Accessories\Accessibility	Default User
Accessories\Entertainment	Default User:Accessories\Entertainment	Default User
Startup	Default User:Startup	Default User
Accessories	All Users:Accessories	All Users
Accessories\Accessibility	All Users:Accessories\Accessibility	All Users
Accessories\Communications	All Users:Accessories\Communications	All Users
Accessories\Entertainment	All Users:Accessories\Entertainment	All Users
Accessories\System Tools	All Users:Accessories\System Tools	All Users
Administrative Tools	All Users:Administrative Tools	All Users
Microsoft SQL Server	All Users:Microsoft SQL Server	All Users
Startup	All Users:Startup	All Users
Accessories	NT AUTHORITY\SYSTEM:Accessories	NT AUTHORITY\SYSTEM
Accessories\Accessibility	NT AUTHORITY\SYSTEM:Accessories\Accessibility	NT AUTHORITY\SYSTEM
Accessories\Entertainment	NT AUTHORITY\SYSTEM:Accessories\Entertainment	NT AUTHORITY\SYSTEM
Startup	NT AUTHORITY\SYSTEM:Startup	NT AUTHORITY\SYSTEM
Accessories	IBMSERVER3\Administrator:Accessories	IBMSERVER3\Administrator
Accessories\Accessibility	IBMSERVER3\Administrator:Accessories\Accessibility	IBMSERVER3\Administrator
Accessories\Entertainment	IBMSERVER3\Administrator:Accessories\Entertainment	IBMSERVER3\Administrator
Administrative Tools	IBMSERVER3\Administrator:Administrative Tools	IBMSERVER3\Administrator
Startup	IBMSERVER3\Administrator:Startup	IBMSERVER3\Administrator

[Startup Programs]

Program	Command	User Name	Location
desktop	desktop.ini	NT AUTHORITY\SYSTEM	Startup
desktop	desktop.ini	IBMSERVER3\Administrator	Startup

desktop	desktop.ini.DEFAULT	Startup
desktop	desktop.ini	All Users Common Startup

[OLE Registration]

Object	Local Server
Sound (OLE2)	sndrec32.exe
Media Clip	mplay32.exe
Video Clip	mplay32.exe /avi
MIDI Sequence	mplay32.exe /mid
Sound	Not Available
Media Clip	Not Available
WordPad Document	"%programfiles%\windows nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object	Not Available
Bitmap Image	mspaint.exe

[Windows Error Reporting]

Time	Type	Details
------	------	---------

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category ]

[Summary]

Item	Value
Version	6.0.3718.0
Build	63718
Application Path	C:\Program Files\Internet Explorer
Language	English (United States)
Active Printer	Not Available
Cipher Strength	128-bit
Content Advisor	Disabled
IEAK Install	No

[File Versions]

File	Version	Size	Date	Path	Company
actxprxy.dll	6.0.3718.0	91 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
advpack.dll	6.0.3718.0	94 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
asctrls.ocx	6.0.3718.0	90 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
browsecl.dll	6.0.3718.0	62 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
browseui.dll	6.0.3718.0	1,009 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
cdfview.dll	6.0.3718.0	142 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
comctl32.dll	5.82.3718.0	561 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
dxtrans.dll	6.3.3718.0	192 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
dxtmsft.dll	6.3.3718.0	333 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iecontl.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3718.0	296 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iepeers.dll	6.0.3718.0	230 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iesetup.dll	6.0.3718.0	57 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
ieuinit.inf	Not Available	19 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Not Available
ieexplore.exe	6.0.3718.0	90 KB	11/15/2002 7:00:00 AM	C:\Program Files\Internet Explorer	Microsoft Corporation
imgutil.dll	6.0.3718.0	30 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
inetctl.cpl	6.0.3718.0	294 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
inetctl.dll	6.0.3718.0	108 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
inseng.dll	6.0.3718.0	71 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mlang.dll	6.0.3718.0	567 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msencode.dll	2002.10.4.0	112 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Not Available

mshta.exe	6.0.3718.0	26 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mshtml.dll	6.0.3718.0	2,771 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mshtml.tlb	6.0.3718.0	1,319 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mshtmlmed.dll	6.0.3718.0	434 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mshtmlr.dll	6.0.3718.0	55 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msident.dll	6.0.3718.0	47 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msidntld.dll	6.0.3718.0	15 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msieftp.dll	6.0.3718.0	230 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msrating.dll	6.0.3718.0	132 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mstime.dll	6.0.3718.0	491 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
occache.dll	6.0.3718.0	89 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
proctexe.ocx	6.3.3718.0	78 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Intel Corporation
sendmail.dll	6.0.3718.0	52 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
shdoclc.dll	6.0.3718.0	521 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
shdocvw.dll	6.0.3718.0	1,327 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
shfolder.dll	6.0.3718.0	23 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
shlwapi.dll	6.0.3718.0	272 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
tdc.ocx	1.3.0.3130	57 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
url.dll	6.0.3718.0	36 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
urlmon.dll	6.0.3718.0	458 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
webcheck.dll	6.0.3718.0	256 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
wininet.dll	6.0.3718.0	592 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation

[Connectivity]

Item Value

Connection Preference      Never dial

LAN Settings

AutoConfigProxy      Not Available

AutoProxyDetectMode      Disabled

AutoConfigURL

Proxy      Disabled

ProxyServer

ProxyOverride

[Cache]

[ Following are sub-categories of this main category ]

[Summary]

Item      Value

Page Refresh Type      Automatic

Temporary Internet Files Folder      C:\Documents and Settings\NetworkService\Local Settings\Temporary Internet Files

Total Disk Space      Not Available

Available Disk Space      Not Available

Maximum Cache Size      Not Available

Available Cache Size      Not Available

[List of Objects]

Program File      Status      CodeBase

No cached object information available

[Content]

[ Following are sub-categories of this main category ]

[Summary]

Item      Value

Content Advisor      Disabled

[Personal Certificates]

Issued To    Issued By    Validity    Signature Algorithm

No personal certificate information available

[Other People Certificates]

Issued To    Issued By    Validity    Signature Algorithm

No other people certificate information available

[Publishers]

Name

No publisher information available

[Security]

Zone      Security Level

My Computer      Custom

Local intranet      Medium-low

Trusted sites      Low

Internet      Medium

Restricted sites      High

## Microsoft SQL Server 2000 Startup Parameters

Microsoft SQL Server Startup Parameters

```
C:\Program Files\Microsoft SQL Server\MSSQL\Binn\sqlservr -c -x -t3502 -g150
```

where:

```
-c Start SQL Server independent of the Service Control Manager
-x Disable the keeping of CPU time and cache hit ratio statistics
-t3502 writes a message to the SQL Server Errorlog showing the beginning and ending time of each checkpoint
-g150 Reserve 150MB for non-buffer pool allocations
```

## Microsoft SQL Server 2000 Configuration Parameters

```
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11>
-- File:    VERSION.SQL
--        Microsoft TPC-C Benchmark Kit Ver. 4.22
--        Copyright Microsoft, 2001
-- Purpose: Returns SQL Server version string
```



```
print " "
select convert(char(30), getdate(),9)
print " "
```

-----  
Feb 22 2003 8:45:25:373AM

(1 row affected)

```
1> 2> 3>
select @@version
```

-----  
-----  
-----  
Microsoft SQL Server 2000 - 8.00.760 (Intel X86)  
Dec 17 2002 14:22:05  
Cop  
yright (c) 1988-2003 Microsoft Corporation  
Enterprise Edition on Wind  
ws NT 5.2 (Build 3718: )

(1 row affected)

```
1> 2>
1> 2> 3> 4> 5> 6> 7> 8> 9> 10>
-- File: CONFIG.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Collects SQL Server configuration parameters
```

```
print " "
select convert(char(30), getdate(),9)
print " "
```

-----  
Feb 22 2003 8:45:26:343AM

(1 row affected)

```
1> 2> 3> DBCC execution completed. If DBCC printed error messages, contact
your system administrator.
Configuration option 'show advanced options' changed from 1 to 1. Run the
RECONFIGURE statement to install.
```

```
sp_configure "show advanced",1
1> 2> reconfigure with override
1> 2> sp_configure
```

name	minimum	maximum
config_value run_value		
-----	-----	-----
affinity mask	-2147483648	2147483647
255 255		
allow updates	0	1 0
0		
awe enabled	0	1 1
1		
c2 audit mode	0	1 0
0		

cost threshold for parallelism	0	32767	
5 5			
Cross DB Ownership Chaining	0	1	
0 0			
cursor threshold	-1	2147483647	
-1 -1			
default full-text language	0	2147483647	
1033 1033			
default language	0	9999	0
0			
fill factor (%)	0	100	0
0			
index create memory (KB)	704	2147483647	
0 0			
lightweight pooling	0	1	1
1			
locks	5000	2147483647	0
0			
max degree of parallelism	0	32	0
0			
max server memory (MB)	4	2147483647	
2147483647 2147483647			
max text repl size (B)	0	2147483647	
65536 65536			
max worker threads	32	32767	
440 440			
media retention	0	365	0
0			
min memory per query (KB)	512	2147483647	
1024 1024			
min server memory (MB)	0	2147483647	
0 0			
nested triggers	0	1	1
1			
network packet size (B)	512	65536	
4096 4096			
open objects	0	2147483647	0
0			
priority boost	0	1	1
1			
query governor cost limit	0	2147483647	
0 0			
query wait (s)	-1	2147483647	-1
-1			
recovery interval (min)	0	32767	
88 88			
remote access	0	1	1
1			
remote login timeout (s)	0	2147483647	
20 20			
remote proc trans	0	1	0
0			
remote query timeout (s)	0	2147483647	
600 600			
scan for startup procs	0	1	0
0			
set working set size	0	1	0
0			
show advanced options	0	1	1
1			
two digit year cutoff	1753	9999	
2049 2049			
user connections	0	32767	0
0			
user options	0	32767	0
0			

1>

## Disk Controller Configuration Parameters

### Mylex eXtremeRAID 2000 Controller 0

```
GCFVERSION=2.00;
Begin
BeginGroup
    PhysicalDevice0 = Channel=0, Target=1, Size=34698MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice1 = Channel=1, Target=9, Size=34698MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice2 = Channel=0, Target=2, Size=34698MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice3 = Channel=1, Target=10, Size=34698MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice4 = Channel=0, Target=3, Size=34698MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice5 = Channel=1, Target=11, Size=34698MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice6 = Channel=0, Target=4, Size=34698MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice7 = Channel=1, Target=12, Size=34698MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    IntermediateDevice0 = StripeSize=64KB, Raid=1, WriteThrough=1,
Size=34696MB,
        (PhysicalDevice0, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks),
        (PhysicalDevice1, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks);
    IntermediateDevice1 = StripeSize=64KB, Raid=1, WriteThrough=1,
Size=34696MB,
        (PhysicalDevice2, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks),
        (PhysicalDevice3, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks);
    IntermediateDevice2 = StripeSize=64KB, Raid=1, WriteThrough=1,
Size=34696MB,
        (PhysicalDevice4, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks),
        (PhysicalDevice5, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks);
    IntermediateDevice3 = StripeSize=64KB, Raid=1, WriteThrough=1,
Size=34696MB,
        (PhysicalDevice6, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks),
        (PhysicalDevice7, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks);
```

```
LogicalDevice2 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=138784MB, BIOSGeometry=8GB,
    (IntermediateDevice0, StartAddress=0MB,
Size=34696MB),
    (IntermediateDevice1, StartAddress=0MB,
Size=34696MB),
    (IntermediateDevice2, StartAddress=0MB,
Size=34696MB),
    (IntermediateDevice3, StartAddress=0MB,
Size=34696MB);
EndGroup
BeginControllerParameter
    ControllerName = eXtremeRAID 2000;
    ControllerType = 28;
    FirmwareVersion = 7.00;
    CacheLineSize = 8KB;
    AutomaticRebuildRate = 50;
    BackgroundInitializeRate = 50;
    ConsistencyCheckRate = 50;
    MORERate = 50;
    InitiatorID = 7;
    DevicesPerSpin = 2;
    SequentialDelay = 6S;
    EnableDriveSizing = 0;
    EnableClustering = 0;
    EnableBGInit = 1;
    EnableBiosLoadDelay = 0;
    EnableForcedUnitAccess = 0;
    DisableBios = 0;
    EnableCDROMBoot = 0;
    EnableStorageWorks = 0;
    EnableSAFTE = 0;
    EnableSES = 0;
    EnableARM = 1;
    EnableOFM = 1;
    OEMCode = 0;
    StartupOption = 0;
    EnableTempOffline = 0;
    EnablePatrolRead = 0;
    EnableSmartMode = 0;
    DlyBtwnIterations = 336;
    SmartScanInterval = 0;
EndControllerParameter
End
```

### Mylex eXtremeRAID 2000 Controller 1

```
GCFVERSION=2.00;
Begin
BeginGroup
    PhysicalDevice0 = Channel=0, Target=0, Size=17340MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice1 = Channel=0, Target=1, Size=17340MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice2 = Channel=0, Target=2, Size=17340MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    PhysicalDevice3 = Channel=0, Target=3, Size=17340MB,
State=Online,
        TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
```

PhysicalDevice4 = Channel=0, Target=4, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice5 = Channel=0, Target=5, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice6 = Channel=0, Target=6, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice7 = Channel=0, Target=8, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice8 = Channel=0, Target=9, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice9 = Channel=0, Target=10, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice10 = Channel=0, Target=11, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice11 = Channel=0, Target=12, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice12 = Channel=0, Target=13, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice13 = Channel=0, Target=14, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice14 = Channel=1, Target=0, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice15 = Channel=1, Target=1, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice16 = Channel=1, Target=2, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice17 = Channel=1, Target=3, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice18 = Channel=1, Target=4, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice19 = Channel=1, Target=5, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice20 = Channel=1, Target=6, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;

PhysicalDevice21 = Channel=1, Target=8, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice22 = Channel=1, Target=9, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice23 = Channel=1, Target=10, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice24 = Channel=1, Target=11, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice25 = Channel=1, Target=12, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice26 = Channel=1, Target=13, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice27 = Channel=1, Target=14, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice28 = Channel=2, Target=0, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice29 = Channel=2, Target=1, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice30 = Channel=2, Target=2, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice31 = Channel=2, Target=3, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice32 = Channel=2, Target=4, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice33 = Channel=2, Target=5, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice34 = Channel=2, Target=6, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice35 = Channel=2, Target=8, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice36 = Channel=2, Target=9, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;  
PhysicalDevice37 = Channel=2, Target=10, Size=17340MB,  
State=Online,  
TransferSpeed=80MHz, TransferWidth=16Bit,  
MaxTag=16;

PhysicalDevice38 = Channel=2, Target=11, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice39 = Channel=2, Target=12, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice40 = Channel=2, Target=13, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice41 = Channel=2, Target=14, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice42 = Channel=3, Target=0, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice43 = Channel=3, Target=1, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice44 = Channel=3, Target=2, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice45 = Channel=3, Target=3, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice46 = Channel=3, Target=4, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice47 = Channel=3, Target=5, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice48 = Channel=3, Target=6, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice0, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice1, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice2, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice3, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice4, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice5, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice6, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks);  
 IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice7, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice8, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice9, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),

(PhysicalDevice10, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice11, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice12, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice13, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks);  
 IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice14, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice15, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice16, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice17, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice18, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice19, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice20, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks);  
 IntermediateDevice3 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice21, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice22, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice23, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice24, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice25, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice26, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice27, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks);  
 IntermediateDevice4 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice28, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice29, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice30, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice31, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice32, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice33, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice34, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks);  
 IntermediateDevice5 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice35, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice36, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice37, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice38, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),  
 (PhysicalDevice39, StartAddress=0MB/0Blocks, Size=17336MB/35504128Blocks),

```

        (PhysicalDevice40, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice41, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
        IntermediateDevice6 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice42, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice43, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice44, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice45, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice46, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice47, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice48, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
        LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=849464MB, BIOSGeometry=8GB,
        (IntermediateDevice0, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice1, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice2, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice3, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice4, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice5, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice6, StartAddress=0MB,
Size=121352MB);
    EndGroup
    BeginControllerParameter
        ControllerName = eXtremeRAID 2000;
        ControllerType = 28;
        FirmwareVersion = 7.00;
        CacheLineSize = 8KB;
        AutomaticRebuildRate = 50;
        BackgroundInitializeRate = 50;
        ConsistencyCheckRate = 50;
        MORERate = 50;
        InitiatorID = 7;
        DevicesPerSpin = 2;
        SequentialDelay = 6S;
        EnableDriveSizing = 0;
        EnableClustering = 0;
        EnableBGInit = 1;
        EnableBiosLoadDelay = 0;
        EnableForcedUnitAccess = 0;
        DisableBios = 0;
        EnableCDROMBoot = 0;
        EnableStorageWorks = 0;
        EnableSAFTE = 0;
        EnableSES = 0;
        EnableARM = 1;
        EnableOFM = 1;
        OEMCode = 0;
        StartupOption = 0;
        EnableTempOffline = 0;
        EnablePatrolRead = 0;
        EnableSmartMode = 0;
        DlyBtwnIterations = 0;
        SmartScanInterval = 0;

```

```

    EndControllerParameter
    End

```

## **Mylex eXtremeRAID 2000 Controller 2**

```

GCFVERSION=2.00;
Begin
    BeginGroup
        PhysicalDevice0 = Channel=0, Target=8, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice1 = Channel=0, Target=9, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice2 = Channel=0, Target=10, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice3 = Channel=0, Target=11, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice4 = Channel=0, Target=12, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice5 = Channel=0, Target=13, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice6 = Channel=0, Target=14, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice7 = Channel=1, Target=0, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice8 = Channel=1, Target=1, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice9 = Channel=1, Target=2, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice10 = Channel=1, Target=3, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice11 = Channel=1, Target=4, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice12 = Channel=1, Target=5, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice13 = Channel=1, Target=6, Size=17340MB,
State=Online,
                TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice14 = Channel=1, Target=8, Size=17340MB,
State=Online,

```

TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice15 = Channel=1, Target=9, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice16 = Channel=1, Target=10, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice17 = Channel=1, Target=11, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice18 = Channel=1, Target=12, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice19 = Channel=1, Target=13, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice20 = Channel=1, Target=14, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice21 = Channel=2, Target=0, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice22 = Channel=2, Target=1, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice23 = Channel=2, Target=2, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice24 = Channel=2, Target=3, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice25 = Channel=2, Target=4, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice26 = Channel=2, Target=5, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice27 = Channel=2, Target=6, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice28 = Channel=2, Target=8, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice29 = Channel=2, Target=9, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice30 = Channel=2, Target=10, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice31 = Channel=2, Target=11, Size=17340MB,  
 State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice32 = Channel=2, Target=12, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice33 = Channel=2, Target=13, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice34 = Channel=2, Target=14, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1,  
 Size=121352MB,  
 (PhysicalDevice0, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice1, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice2, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice3, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice4, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice5, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice6, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks);  
 IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1,  
 Size=121352MB,  
 (PhysicalDevice7, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice8, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice9, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice10, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice11, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice12, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice13, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks);  
 IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1,  
 Size=121352MB,  
 (PhysicalDevice14, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice15, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice16, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice17, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice18, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice19, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice20, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks);  
 IntermediateDevice3 = StripeSize=64KB, Raid=0, WriteThrough=1,  
 Size=121352MB,  
 (PhysicalDevice21, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice22, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),

```

        (PhysicalDevice23, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice24, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice25, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice26, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice27, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
        IntermediateDevice4 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice28, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice29, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice30, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice31, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice32, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice33, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice34, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
        LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=606760MB, BIOSGeometry=8GB,
        (IntermediateDevice0, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice1, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice2, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice3, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice4, StartAddress=0MB,
Size=121352MB);
    EndGroup
    BeginControllerParameter
        ControllerName = eXtremeRAID 2000;
        ControllerType = 28;
        FirmwareVersion = 7.00;
        CacheLineSize = 8KB;
        AutomaticRebuildRate = 50;
        BackgroundInitializeRate = 50;
        ConsistencyCheckRate = 50;
        MORERate = 50;
        InitiatorID = 7;
        DevicesPerSpin = 2;
        SequentialDelay = 6S;
        EnableDriveSizing = 0;
        EnableClustering = 0;
        EnableBGInit = 1;
        EnableBiosLoadDelay = 0;
        EnableForcedUnitAccess = 0;
        DisableBios = 0;
        EnableCDROMBoot = 0;
        EnableStorageWorks = 0;
        EnableSAFTE = 0;
        EnableSES = 0;
        EnableARM = 1;
        EnableOFM = 1;
        OEMCode = 0;
        StartupOption = 0;
        EnableTempOffline = 0;
        EnablePatrolRead = 0;
        EnableSmartMode = 0;

```

```

        DlyBtwnIterations = 0;
        SmartScanInterval = 0;
    EndControllerParameter
End

```

### **Mylex eXtremeRAID 2000 Controller 3**

```

GCFVERSION=2.00;
Begin
    BeginGroup
        PhysicalDevice0 = Channel=0, Target=0, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice1 = Channel=0, Target=1, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice2 = Channel=0, Target=2, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice3 = Channel=0, Target=3, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice4 = Channel=0, Target=4, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice5 = Channel=0, Target=5, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice6 = Channel=0, Target=6, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice7 = Channel=0, Target=8, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice8 = Channel=0, Target=9, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice9 = Channel=0, Target=10, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice10 = Channel=0, Target=11, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice11 = Channel=0, Target=12, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice12 = Channel=0, Target=13, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice13 = Channel=0, Target=14, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
    EndGroup
End

```





PhysicalDevice48 = Channel=3, Target=14, Size=17340MB, State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice0, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice1, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice2, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice3, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice4, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice5, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice6, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks);  
 IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice7, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice8, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice9, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice10, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice11, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice12, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice13, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks);  
 IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice14, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice15, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice16, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice17, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice18, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice19, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice20, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks);  
 IntermediateDevice3 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice21, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice22, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice23, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice24, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice25, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice26, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice27, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks);

IntermediateDevice4 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice28, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice29, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice30, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice31, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice32, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice33, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice34, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks);  
 IntermediateDevice5 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice35, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice36, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice37, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice38, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice39, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice40, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice41, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks);  
 IntermediateDevice6 = StripeSize=64KB, Raid=0, WriteThrough=1, Size=121352MB,  
 (PhysicalDevice42, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice43, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice44, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice45, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice46, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice47, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks),  
 (PhysicalDevice48, StartAddress=0MB/0Blocks, Size=17336MB/35504128BBlocks);  
 LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1, Size=849464MB, BIOSGeometry=8GB,  
 (IntermediateDevice0, StartAddress=0MB, Size=121352MB),  
 (IntermediateDevice1, StartAddress=0MB, Size=121352MB),  
 (IntermediateDevice2, StartAddress=0MB, Size=121352MB),  
 (IntermediateDevice3, StartAddress=0MB, Size=121352MB),  
 (IntermediateDevice4, StartAddress=0MB, Size=121352MB),  
 (IntermediateDevice5, StartAddress=0MB, Size=121352MB),  
 (IntermediateDevice6, StartAddress=0MB, Size=121352MB);  
 EndGroup  
 BeginControllerParameter  
 ControllerName = eXtremeRAID 2000;  
 ControllerType = 28;

```

FirmwareVersion = 7.00;
CacheLineSize = 8KB;
AutomaticRebuildRate = 50;
BackgroundInitializeRate = 50;
ConsistencyCheckRate = 50;
MORERate = 50;
InitiatorID = 7;
DevicesPerSpin = 2;
SequentialDelay = 6S;
EnableDriveSizing = 0;
EnableClustering = 0;
EnableBGInit = 1;
EnableBiosLoadDelay = 0;
EnableForcedUnitAccess = 0;
DisableBios = 0;
EnableCDROMBoot = 0;
EnableStorageWorks = 0;
EnableSAFTE = 0;
EnableSES = 0;
EnableARM = 1;
EnableOFM = 1;
OEMCode = 0;
StartupOption = 0;
EnableTempOffline = 0;
EnablePatrolRead = 0;
EnableSmartMode = 0;
DlyBtwnIterations = 336;
SmartScanInterval = 0;

```

```

EndControllerParameter
End

```

## ***Mylex eXtremeRAID 2000 Controller 4***

```

GCFVERSION=2.00;
Begin
BeginGroup
PhysicalDevice0 = Channel=0, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice1 = Channel=0, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice2 = Channel=0, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice3 = Channel=0, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice4 = Channel=0, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice5 = Channel=0, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice6 = Channel=0, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice7 = Channel=1, Target=0, Size=17340MB,
State=Online,

```

```

TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice8 = Channel=1, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice9 = Channel=1, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice10 = Channel=1, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice11 = Channel=1, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice12 = Channel=1, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice13 = Channel=1, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice14 = Channel=1, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice15 = Channel=1, Target=9, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice16 = Channel=1, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice17 = Channel=1, Target=11, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice18 = Channel=1, Target=12, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice19 = Channel=1, Target=13, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice20 = Channel=1, Target=14, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice21 = Channel=2, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice22 = Channel=2, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice23 = Channel=2, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice24 = Channel=2, Target=3, Size=17340MB,
State=Online,

```

```

TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice25 = Channel=2, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice26 = Channel=2, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice27 = Channel=2, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice28 = Channel=2, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice29 = Channel=2, Target=9, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice30 = Channel=2, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice31 = Channel=2, Target=11, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice32 = Channel=2, Target=12, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice33 = Channel=2, Target=13, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice34 = Channel=2, Target=14, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice0, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice1, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice2, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice3, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice4, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice5, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice6, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice7, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice8, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice9, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice10, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice11, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice12, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice13, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice14, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice15, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice16, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice17, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice18, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice19, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice20, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice3 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice21, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice22, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice23, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice24, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice25, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice26, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice27, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice4 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice28, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice29, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice30, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice31, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice32, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice33, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice34, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=606760MB, BIOSGeometry=8GB,
(IntermediateDevice0, StartAddress=0MB,
Size=121352MB),
(IntermediateDevice1, StartAddress=0MB,
Size=121352MB),
(IntermediateDevice2, StartAddress=0MB,
Size=121352MB),
(IntermediateDevice3, StartAddress=0MB,
Size=121352MB),
(IntermediateDevice4, StartAddress=0MB,
Size=121352MB);
EndGroup
BeginControllerParameter

```

```

ControllerName = eXtremeRAID 2000;
ControllerType = 28;
FirmwareVersion = 7.00;
CacheLineSize = 8KB;
AutomaticRebuildRate = 50;
BackgroundInitializeRate = 50;
ConsistencyCheckRate = 50;
MORERate = 50;
InitiatorID = 7;
DevicesPerSpin = 2;
SequentialDelay = 6S;
EnableDriveSizing = 0;
EnableClustering = 0;
EnableBGInit = 1;
EnableBiosLoadDelay = 0;
EnableForcedUnitAccess = 0;
DisableBios = 0;
EnableCDROMBoot = 0;
EnableStorageWorks = 0;
EnableSAFTE = 0;
EnableSES = 0;
EnableARM = 1;
EnableOFM = 1;
OEMCode = 0;
StartupOption = 0;
EnableTempOffline = 0;
EnablePatrolRead = 0;
EnableSmartMode = 0;
DlyBtwnIterations = 336;
SmartScanInterval = 0;

```

```

EndControllerParameter
End

```

## **Mylex eXtremeRAID 2000 Controller 5**

```

GCFVERSION=2.00;
Begin
BeginGroup
PhysicalDevice0 = Channel=0, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice1 = Channel=0, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice2 = Channel=0, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice3 = Channel=0, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice4 = Channel=0, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice5 = Channel=0, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice6 = Channel=0, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;

```

```

PhysicalDevice7 = Channel=0, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice8 = Channel=0, Target=9, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice9 = Channel=0, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice10 = Channel=0, Target=11, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice11 = Channel=0, Target=12, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice12 = Channel=0, Target=13, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice13 = Channel=0, Target=14, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice14 = Channel=1, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice15 = Channel=1, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice16 = Channel=1, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice17 = Channel=1, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice18 = Channel=1, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice19 = Channel=1, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice20 = Channel=1, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice21 = Channel=1, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice22 = Channel=1, Target=9, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice23 = Channel=1, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;

```

PhysicalDevice24 = Channel=1, Target=11, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice25 = Channel=1, Target=12, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice26 = Channel=1, Target=13, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice27 = Channel=1, Target=14, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice28 = Channel=2, Target=0, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice29 = Channel=2, Target=1, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice30 = Channel=2, Target=2, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice31 = Channel=2, Target=3, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice32 = Channel=2, Target=4, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice33 = Channel=2, Target=5, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice34 = Channel=2, Target=6, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice35 = Channel=2, Target=8, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice36 = Channel=2, Target=9, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice37 = Channel=2, Target=10, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice38 = Channel=2, Target=11, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice39 = Channel=2, Target=12, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 PhysicalDevice40 = Channel=2, Target=13, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;

PhysicalDevice41 = Channel=2, Target=14, Size=17340MB,  
 State=Online,  
 TransferSpeed=80MHz, TransferWidth=16Bit,  
 MaxTag=16;  
 IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1,  
 Size=242704MB,  
 (PhysicalDevice0, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice1, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice2, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice3, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice4, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice5, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice6, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice7, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice8, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice9, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice10, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice11, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice12, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice13, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks);  
 IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1,  
 Size=242704MB,  
 (PhysicalDevice14, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice15, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice16, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice17, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice18, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice19, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice20, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice21, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice22, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice23, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice24, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice25, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice26, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),  
 (PhysicalDevice27, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks);  
 IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1,  
 Size=242704MB,  
 (PhysicalDevice28, StartAddress=0MB/0Blocks,  
 Size=17336MB/35504128Blocks),

```

(PhysicalDevice29, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice30, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice31, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice32, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice33, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice34, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice35, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice36, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice37, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice38, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice39, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice40, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice41, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=728112MB, BIOSGeometry=8GB,
(IntermediateDevice0, StartAddress=0MB,
Size=242704MB),
(IntermediateDevice1, StartAddress=0MB,
Size=242704MB),
(IntermediateDevice2, StartAddress=0MB,
Size=242704MB);
EndGroup
BeginControllerParameter
ControllerName = eXtremeRAID 2000;
ControllerType = 28;
FirmwareVersion = 7.01;
CacheLineSize = 8KB;
AutomaticRebuildRate = 50;
BackgroundInitializeRate = 50;
ConsistencyCheckRate = 50;
MORERate = 50;
InitiatorID = 7;
DevicesPerSpin = 2;
SequentialDelay = 6S;
EnableDriveSizing = 0;
EnableClustering = 0;
EnableBGInit = 1;
EnableBiosLoadDelay = 0;
EnableForcedUnitAccess = 0;
DisableBios = 0;
EnableCDROMBoot = 0;
EnableStorageWorks = 0;
EnableSAFTE = 0;
EnableSES = 0;
EnableARM = 1;
EnableOFM = 1;
OEMCode = 0;
StartupOption = 0;
EnableTempOffline = 0;
EnablePatrolRead = 0;
EnableSmartMode = 0;
DlyBtwnIterations = 0;
SmartScanInterval = 0;
EndControllerParameter
End

```

## Microsoft Windows 2000 Server

### System Information Report for Client 1

The configuration of the second client was the same as Client 1.

System

Information report written at: 02/24/2003 07:45:31 AM  
[System Information]

[ Following are sub-categories of this main category ]

[System Summary]

Item	Value
OS Name	Microsoft Windows 2000 Server
Version	5.0.2195 Service Pack 2 Build 2195
OS Manufacturer	Microsoft Corporation
System Name	CLIENT10
System Manufacturer	IBM
System Model	-[8647xxx]-
System Type	X86-based PC
Processor	x86 Family 15 Model 2 Stepping 7 GenuineIntel ~37419 Mhz
Processor	x86 Family 15 Model 2 Stepping 7 GenuineIntel ~37419 Mhz
BIOS Version	)Phoenix - Award WorkstationBIOS v6.00PG
Windows Directory	C:\WINNT
System Directory	C:\WINNT\System32
Boot Device	\Device\Harddisk0\Partition1
Locale	United States
User Name	CLIENT10\Administrator
Time Zone	Eastern Standard Time
Total Physical Memory	1,048,044 KB
Available Physical Memory	876,024 KB
Total Virtual Memory	4,092,700 KB
Available Virtual Memory	3,847,796 KB
Page File Space	3,044,656 KB
Page File	C:\pagefile.sys

[Hardware Resources]

[ Following are sub-categories of this main category ]

[Conflicts/Sharing]

Resource	Device
No conflicted/shared resources	

[DMA]

Channel	Device	Status
4	Direct memory access controller	OK
2	Standard floppy disk controller	OK

[Forced Hardware]

Device	PNP Device ID
No Forced Hardware	

[I/O]

Address Range	Device	Status
0x0000-0x0CF7	PCI bus	OK
0x0000-0x0CF7	Direct memory access controller	OK
0x0D00-0x40B7	PCI bus	OK
0x40B9-0xFFFF	PCI bus	OK

0x9000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0x9000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0x9000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0x9000-0xBFFF	Intel(R) PRO/100 S Dual Port Server Adapter #5	OK
0xB000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0xB000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0xB000-0xBFFF	Intel(R) PRO/100 S Dual Port Server Adapter #3	OK
0xB400-0xB43F	Intel(R) PRO/100 S Dual Port Server Adapter #4	OK
0x9400-0x943F	Intel(R) PRO/100 S Dual Port Server Adapter #6	OK
0xA000-0xA0FF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xA400-0xA4FF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xC000-0xC0FF	ATI Technologies Inc. RAGE XL PCI	OK
0x03B0-0x03BB	ATI Technologies Inc. RAGE XL PCI	OK
0x03C0-0x03DF	ATI Technologies Inc. RAGE XL PCI	OK
0x0A79-0x0A79	ISAPNP Read Data Port	OK
0x0279-0x0279	ISAPNP Read Data Port	OK
0x0274-0x0277	ISAPNP Read Data Port	OK
0xF000-0xF00F	Standard Dual Channel PCI IDE Controller	OK
0x01F0-0x01F7	Primary IDE Channel	OK
0x03F6-0x03F6	Primary IDE Channel	OK
0x0170-0x0177	Secondary IDE Channel	OK
0x0376-0x0376	Secondary IDE Channel	OK
0x5000-0x501F	PCI Device	OK
0x4000-0x40BF	Motherboard resources	OK
0x0010-0x001F	Motherboard resources	OK
0x0022-0x003F	Motherboard resources	OK
0x0044-0x005F	Motherboard resources	OK
0x0062-0x0063	Motherboard resources	OK
0x0065-0x006F	Motherboard resources	OK
0x0074-0x007F	Motherboard resources	OK
0x0091-0x0093	Motherboard resources	OK
0x00A2-0x00BF	Motherboard resources	OK
0x00E0-0x00EF	Motherboard resources	OK
0x04D0-0x04D1	Motherboard resources	OK
0x0800-0x087F	Motherboard resources	OK
0x0020-0x0021	Programmable interrupt controller	OK
0x00A0-0x00A1	Programmable interrupt controller	OK
0x0080-0x0090	Direct memory access controller	OK
0x0094-0x009F	Direct memory access controller	OK
0x00C0-0x00DF	Direct memory access controller	OK
0x0040-0x0043	System timer	OK
0x0070-0x0073	System CMOS/real time clock	OK
0x0061-0x0061	System speaker	OK
0x00F0-0x00FF	Numeric data processor	OK
0x03F2-0x03F5	Standard floppy disk controller	OK
0x03F7-0x03F7	Standard floppy disk controller	OK
0x03F8-0x03FF	Communications Port (COM1)	OK
0x02F8-0x02FF	Communications Port (COM2)	OK
0x0378-0x037F	Printer Port (LPT1)	OK
0x0060-0x0060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x0064-0x0064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x40B8-0x40B8	Not Available	OK

[IRQs]

IRQ Number	Device
9	Microsoft ACPI-Compliant System
48	Broadcom NetXtreme Gigabit Ethernet
52	Intel(R) PRO/100 S Dual Port Server Adapter #3
53	Intel(R) PRO/100 S Dual Port Server Adapter #4

28	Intel(R) PRO/100 S Dual Port Server Adapter #5
29	Intel(R) PRO/100 S Dual Port Server Adapter #6
32	LSI Logic 1020/1030 Ultra320 SCSI Adapter
33	LSI Logic 1020/1030 Ultra320 SCSI Adapter
22	ATI Technologies Inc. RAGE XL PCI
14	Primary IDE Channel
10	PCI Device
8	System CMOS/real time clock
13	Numeric data processor
6	Standard floppy disk controller
4	Communications Port (COM1)
3	Communications Port (COM2)
12	PS/2 Compatible Mouse
1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard

[Memory]

Range	Device	Status
0xC8000-0xCBFFF	System board	OK
0xF0000-0xF7FFF	System board	OK
0xF8000-0xFBFFF	System board	OK
0xFC000-0xFFFFF	System board	OK
0x3FFF0000-0x3FFFFFFF	System board	OK
0x0000-0x9FFFF	System board	OK
0x100000-0x3FFFFFFF	System board	OK
0xFEC00000-0xFECFFFFFFF	System board	OK
0xFEE00000-0xFEEFFFFFFF	System board	OK
0xFFB00000-0xFFB7FFFF	System board	OK
0xFFFF0000-0xFFFFFFF	System board	OK
0xE0000-0xEFFFF	System board	OK
0xFFB80000-0xFFBFFFFF	Intel(r) 82802 Firmware Hub Device	OK
0xA0000-0xBFFFF	PCI bus	OK
0xA0000-0xBFFFF	ATI Technologies Inc. RAGE XL PCI	OK
0xC0000-0xDFFFF	PCI bus	OK
0x40000000-0xFEBFFFFF	PCI bus	OK
0xEC000000-0xEFFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF0000000-0xF2FFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF0000000-0xF2FFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF2201000-0xF2201FFF	System Interrupt Controller	OK
0xF2000000-0xF21FFFFF	PCI standard PCI-to-PCI bridge	OK
0xF2000000-0xF21FFFFF	PCI standard PCI-to-PCI bridge	OK
0xF2000000-0xF21FFFFF	Intel(R) PRO/100 S Dual Port Server Adapter #3	OK
0xF2100000-0xF210FFFF	Broadcom NetXtreme Gigabit Ethernet	OK
0xF2041000-0xF2041FFF	Intel(R) PRO/100 S Dual Port Server Adapter #3	OK
0xF2040000-0xF2040FFF	Intel(R) PRO/100 S Dual Port Server Adapter #4	OK
0xF2020000-0xF203FFFF	Intel(R) PRO/100 S Dual Port Server Adapter #4	OK
0xF2200000-0xF2200FFF	System Interrupt Controller	OK
0xF1000000-0xF10FFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF1000000-0xF10FFFFFFF	Intel(R) PRO/100 S Dual Port Server Adapter #5	OK
0xF1041000-0xF1041FFF	Intel(R) PRO/100 S Dual Port Server Adapter #5	OK
0xF1040000-0xF1040FFF	Intel(R) PRO/100 S Dual Port Server Adapter #6	OK
0xF1020000-0xF103FFFF	Intel(R) PRO/100 S Dual Port Server Adapter #6	OK
0xF1110000-0xF111FFFF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xF1100000-0xF110FFFF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xF1120000-0xF112FFFF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK

0xF1130000-0xF113FFFF LSI Logic 1020/1030 Ultra320 SCSI Adapter  
OK  
0xF3000000-0xF3FFFFFFF ATI Technologies Inc. RAGE XL PCI  
OK  
0xF5000000-0xF5000FFF ATI Technologies Inc. RAGE XL PCI  
OK  
0xFEBFFC00-0xFEBFFFFFF Standard Dual Channel PCI IDE Controller  
OK

[Components]

[ Following are sub-categories of this main category ]

[Multimedia]

[ Following are sub-categories of this main category ]

[Audio Codecs]

Codec Version	Manufacturer Size	Description Creation Date	Status	File
OK	C:\WINNT\System32\lhacm.acm	Microsoft Corporation 2/10/2003 5:01:32 PM	4.4.3385	33.27 KB (34,064 bytes)
OK	C:\WINNT\System32\iac25_32.ax	Intel Corporation 12/7/1999 7:00:00 AM	Indeo® audio software	2.05.53 195.00 KB (199,680 bytes)
OK	C:\WINNT\System32\msg723.acm	Microsoft Corporation 2/10/2003 5:01:31 PM	4.4.3385	106.77 KB (109,328 bytes)
OK	C:\WINNT\System32\msgsm32.acm	Microsoft Corporation 12/7/1999 7:00:00 AM	5.00.2134.1	22.27 KB (22,800 bytes)
OK	C:\WINNT\System32\tssoft32.acm	DSP GROUP, INC. 12/7/1999 7:00:00 AM	1.01	9.27 KB (9,488 bytes)
OK	C:\WINNT\System32\msadp32.acm	Microsoft Corporation 12/7/1999 7:00:00 AM	5.00.2134.1	14.77 KB (15,120 bytes)
OK	C:\WINNT\System32\imaadp32.acm	Microsoft Corporation 12/7/1999 7:00:00 AM	5.00.2134.1	16.27 KB (16,656 bytes)
OK	C:\WINNT\System32\msg711.acm	Microsoft Corporation 12/7/1999 7:00:00 AM	5.00.2134.1	10.27 KB (10,512 bytes)

[Video Codecs]

Codec Version	Manufacturer Size	Description Creation Date	Status	File
OK	C:\WINNT\System32\ir50_32.dll	Intel Corporation 12/7/1999 7:00:00 AM	Indeo® video 5.10	R.5.10.15.2.55 737.50 KB (755,200 bytes)
OK	C:\WINNT\System32\msh261.drv	Microsoft Corporation 2/10/2003 5:01:31 PM	4.4.3385	163.77 KB (167,696 bytes)
OK	C:\WINNT\System32\msh263.drv	Microsoft Corporation 2/10/2003 5:01:10 PM	4.4.3385	252.27 KB (258,320 bytes)
OK	C:\WINNT\System32\msvidc32.dll	Microsoft Corporation 12/7/1999 7:00:00 AM	5.00.2134.1	27.27 KB (27,920 bytes)
OK	C:\WINNT\System32\iccevid.dll	Radius Inc. 12/7/1999 7:00:00 AM	1.10.0.6	108.00 KB (110,592 bytes)
OK	C:\WINNT\System32\msrle32.dll	Microsoft Corporation 12/7/1999 7:00:00 AM	5.00.2134.1	10.77 KB (11,024 bytes)

c:\winnt\system32\ir32\_32.dll Intel(R) Corporation OK  
C:\WINNT\System32\IR32\_32.DLL Not Available 194.50 KB  
(199,168 bytes) 12/7/1999 7:00:00 AM

[CD-ROM]

Item	Value
Drive	D:
Description	CD-ROM Drive
Media Loaded	False
Media Type	CD-ROM
Name	HL-DT-ST CD-ROM GCR-8480B
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROMHL-DT-ST_CD-ROM_GCR-8480B_1.02_5&74A80B&0&0.0

[Sound Device]

Item	Value
No sound devices	

[Display]

Item	Value
Name	ATI Technologies Inc. RAGE XL PCI
PNP Device ID	PCI\VEN_1002&DEV_4752&SUBSYS_02401014&REV_27\4&1A671D0C&0&08F0
Adapter Type	ATI RAGE XL PCI, ATI Technologies Inc. compatible
Adapter Description	ATI Technologies Inc. RAGE XL PCI
Adapter RAM	8.00 MB (8,388,608 bytes)
Installed Drivers	atidrab.dll
Driver Version	5.00.2179.1
INF File	display.inf (atirage3 section)
Color Planes	1
Color Table Entries	65536
Resolution	1024 x 768 x 60 hertz
Bits/Pixel	16

[Infrared]

Item	Value
No infrared devices	

[Input]

[ Following are sub-categories of this main category ]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\3&13C0B0C5&0
NumberOfFunctionKeys	12

[Pointing Device]

Item	Value



Hardware Type PS/2 Compatible Mouse  
 Number of Buttons 3  
 Status OK  
 PNP Device ID ACPI\PNP0F13\3&13C0B0C5&0  
 Power Management Supported False  
 Double Click Threshold 6  
 Handedness Right Handed Operation

[Modem]

Item Value  
 No modems

[Network]

[ Following are sub-categories of this main category ]

[Adapter]

Item Value  
 Name [00000000] RAS Async Adapter  
 Adapter Type Not Available  
 Product Name RAS Async Adapter  
 Installed True  
 PNP Device ID Not Available  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 0  
 Service Name AsyncMac  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Service Name Not Available

Name [00000001] WAN Miniport (L2TP)  
 Adapter Type Not Available  
 Product Name WAN Miniport (L2TP)  
 Installed True  
 PNP Device ID ROOT\MS\_L2TPMINIPORT\0000  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 1  
 Service Name Rasl2tp  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Service Name Rasl2tp  
 Driver c:\winnt\system32\drivers\rasl2tp.sys (50800, 5.00.2179.1)

Name [00000002] WAN Miniport (PPTP)  
 Adapter Type Wide Area Network (WAN)  
 Product Name WAN Miniport (PPTP)  
 Installed True  
 PNP Device ID ROOT\MS\_PPTPMINIPORT\0000  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 2  
 Service Name PptpMiniport  
 IP Address Not Available  
 IP Subnet Not Available

Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 50:50:54:50:30:30  
 Service Name PptpMiniport  
 Driver c:\winnt\system32\drivers\raspptp.sys (47856, 5.00.2160.1)

Name [00000003] Direct Parallel  
 Adapter Type Not Available  
 Product Name Direct Parallel  
 Installed True  
 PNP Device ID ROOT\MS\_PTMINIPORT\0000  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 3  
 Service Name Raspti  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Service Name Raspti  
 Driver c:\winnt\system32\drivers\raspti.sys (16880, 5.00.2146.1)

Name [00000004] WAN Miniport (IP)  
 Adapter Type Not Available  
 Product Name WAN Miniport (IP)  
 Installed True  
 PNP Device ID ROOT\MS\_NDISWANIP\0000  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 4  
 Service Name NdisWan  
 IP Address Not Available  
 IP Subnet Not Available  
 Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address Not Available  
 Service Name NdisWan  
 Driver c:\winnt\system32\drivers\ndiswan.sys (90096, 5.00.2195.2779)

Name [00000005] Broadcom NetXtreme Gigabit Ethernet  
 Adapter Type Ethernet 802.3  
 Product Name Broadcom NetXtreme Gigabit Ethernet  
 Installed True  
 PNP Device ID PCI\VEN\_14E4&DEV\_16A7&SUBSYS\_026F1014&REV\_02\5&121CC7C2&0&08E810  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 5  
 Service Name b57w2k  
 IP Address 192.168.132.251  
 IP Subnet 255.255.255.0  
 Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 00:10:DC:76:E2:B3  
 Service Name b57w2k  
 IRQ Number 48  
 Driver c:\winnt\system32\drivers\b57w2k.sys (78352, 2.78.0.0)

Name [00000008] Intel(R) PRO/100 S Dual Port Server Adapter  
 Adapter Type Ethernet 802.3  
 Product Name Intel(R) PRO/100 S Dual Port Server Adapter  
 Installed True  
 PNP Device ID  
 PCI\VEN\_8086&DEV\_1229&SUBSYS\_10158086&REV\_0D\6&27CA6BFE  
 &0&2010E810  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 8  
 Service Name E100B  
 IP Address 192.168.120.10  
 IP Subnet 255.255.255.0  
 Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 00:02:B3:A8:B1:DB  
 Service Name E100B  
 IRQ Number 52  
 I/O Port 0xB000-0xBFFF  
 Driver c:\winnt\system32\drivers\e100bnt5.sys (141584, 6.04.14.0000)

Name [00000009] Intel(R) PRO/100 S Dual Port Server Adapter  
 Adapter Type Ethernet 802.3  
 Product Name Intel(R) PRO/100 S Dual Port Server Adapter  
 Installed True  
 PNP Device ID  
 PCI\VEN\_8086&DEV\_1229&SUBSYS\_10158086&REV\_0D\6&27CA6BFE  
 &0&2810E810  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 9  
 Service Name E100B  
 IP Address 192.168.110.10  
 IP Subnet 255.255.255.0  
 Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 00:02:B3:A8:B1:DC  
 Service Name E100B  
 IRQ Number 53  
 I/O Port 0xB400-0xB43F  
 Driver c:\winnt\system32\drivers\e100bnt5.sys (141584, 6.04.14.0000)

Name [00000010] Intel(R) PRO/100 S Dual Port Server Adapter  
 Adapter Type Ethernet 802.3  
 Product Name Intel(R) PRO/100 S Dual Port Server Adapter  
 Installed True  
 PNP Device ID  
 PCI\VEN\_8086&DEV\_1229&SUBSYS\_10158086&REV\_0D\6&34E7E7F4&  
 0&2010F810  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 10  
 Service Name E100B  
 IP Address 192.168.140.10  
 IP Subnet 255.255.255.0  
 Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 00:02:B3:B8:F9:AD  
 Service Name E100B  
 IRQ Number 28  
 I/O Port 0x9000-0xBFFF

Driver c:\winnt\system32\drivers\e100bnt5.sys (141584, 6.04.14.0000)

Name [00000011] Intel(R) PRO/100 S Dual Port Server Adapter  
 Adapter Type Ethernet 802.3  
 Product Name Intel(R) PRO/100 S Dual Port Server Adapter  
 Installed True  
 PNP Device ID  
 PCI\VEN\_8086&DEV\_1229&SUBSYS\_10158086&REV\_0D\6&34E7E7F4&  
 0&2810F810  
 Last Reset 2/23/2003 11:23:14 AM  
 Index 11  
 Service Name E100B  
 IP Address 192.168.130.10  
 IP Subnet 255.255.255.0  
 Default IP Gateway Not Available  
 DHCP Enabled False  
 DHCP Server Not Available  
 DHCP Lease Expires Not Available  
 DHCP Lease Obtained Not Available  
 MAC Address 00:02:B3:B8:F9:AE  
 Service Name E100B  
 IRQ Number 29  
 I/O Port 0x9400-0x943F  
 Driver c:\winnt\system32\drivers\e100bnt5.sys (141584, 6.04.14.0000)

[Protocol]

Item	Value
Name	MSAFD Tcpi [TCP/IP]
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	16 bytes
MaximumMessageSize	0 bytes
MessageOriented	False
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	True
SupportsGracefulClosing	True
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False

Name	MSAFD Tcpi [UDP/IP]
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	16 bytes
MaximumMessageSize	65467 bytes
MessageOriented	True
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	True

Name	RSVP UDP Service Provider
ConnectionlessService	True
GuaranteesDelivery	False

GuaranteesSequencing False  
 MaximumAddressSize 16 bytes  
 MaximumMessageSize 65467 bytes  
 MessageOriented True  
 MinimumAddressSize 16 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting True  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption True  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting True

Name RSVP TCP Service Provider  
 ConnectionlessService False  
 GuaranteesDelivery True  
 GuaranteesSequencing True  
 MaximumAddressSize 16 bytes  
 MaximumMessageSize 0 bytes  
 MessageOriented False  
 MinimumAddressSize 16 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting False  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption True  
 SupportsExpeditedData True  
 SupportsGracefulClosing True  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{46C9A0D6-E62D-4DBF-958D-3332D7E2724D}]  
 SEQPACKET 0  
 ConnectionlessService False  
 GuaranteesDelivery True  
 GuaranteesSequencing True  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize 20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting False  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{46C9A0D6-E62D-4DBF-958D-3332D7E2724D}]  
 DATAGRAM 0  
 ConnectionlessService True  
 GuaranteesDelivery False  
 GuaranteesSequencing False  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize 20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting True  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False

SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{CCEF995F-88D1-4909-B081-227DA339588C}]  
 SEQPACKET 8  
 ConnectionlessService False  
 GuaranteesDelivery True  
 GuaranteesSequencing True  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize 20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting False  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{CCEF995F-88D1-4909-B081-227DA339588C}]  
 DATAGRAM 8  
 ConnectionlessService True  
 GuaranteesDelivery False  
 GuaranteesSequencing False  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize 20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting True  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{429A8AF4-651D-45B3-BB0C-2B8ADDFB0687}]  
 SEQPACKET 7  
 ConnectionlessService False  
 GuaranteesDelivery True  
 GuaranteesSequencing True  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize 20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting False  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{429A8AF4-651D-45B3-BB0C-2B8ADDFB0687}]  
 DATAGRAM 7

ConnectionlessService True  
 GuaranteesDelivery False  
 GuaranteesSequencing False  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting True  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{0AE55295-FD97-4F03-8CE0-2962253F5166}]  
 SEQPACKET 6  
 ConnectionlessService False  
 GuaranteesDelivery True  
 GuaranteesSequencing True  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting False  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{0AE55295-FD97-4F03-8CE0-2962253F5166}]  
 DATAGRAM 6  
 ConnectionlessService True  
 GuaranteesDelivery False  
 GuaranteesSequencing False  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting True  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{863ED3FC-3C10-4E07-A1A7-C4300734A1C1}]  
 SEQPACKET 5  
 ConnectionlessService False  
 GuaranteesDelivery True  
 GuaranteesSequencing True  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize20 bytes  
 PseudoStreamOriented False

SupportsBroadcasting False  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{863ED3FC-3C10-4E07-A1A7-C4300734A1C1}]  
 DATAGRAM 5  
 ConnectionlessService True  
 GuaranteesDelivery False  
 GuaranteesSequencing False  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting True  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{BAD679FF-C376-4B6F-ABCE-3FA6DEA10679}]  
 SEQPACKET 1  
 ConnectionlessService False  
 GuaranteesDelivery True  
 GuaranteesSequencing True  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting False  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{BAD679FF-C376-4B6F-ABCE-3FA6DEA10679}]  
 DATAGRAM 1  
 ConnectionlessService True  
 GuaranteesDelivery False  
 GuaranteesSequencing False  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting True  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{746F2941-9397-47E7-8C77-C78A77DFC894}]  
 SEQPACKET 2  
 ConnectionlessService False  
 GuaranteesDelivery True  
 GuaranteesSequencing True  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting False  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{746F2941-9397-47E7-8C77-C78A77DFC894}]  
 DATAGRAM 2  
 ConnectionlessService True  
 GuaranteesDelivery False  
 GuaranteesSequencing False  
 MaximumAddressSize 20 bytes  
 MaximumMessageSize 64000 bytes  
 MessageOriented True  
 MinimumAddressSize20 bytes  
 PseudoStreamOriented False  
 SupportsBroadcasting True  
 SupportsConnectData False  
 SupportsDisconnectData False  
 SupportsEncryption False  
 SupportsExpeditedData False  
 SupportsGracefulClosing False  
 SupportsGuaranteedBandwidth False  
 SupportsMulticasting False

[WinSock]

Item Value  
 File c:\winnt\system32\winsock.dll  
 Version 3.10  
 Size 2.80 KB (2,864 bytes)

File c:\winnt\system32\wsock32.dll  
 Version 5.00.2195.2871  
 Size 21.27 KB (21,776 bytes)

[Ports]

[ Following are sub-categories of this main category ]

[Serial]

Item Value  
 Name COM1  
 Status OK  
 PNP Device ID ACPI\PNP0501\1  
 Maximum Input Buffer Size 0  
 Maximum Output Buffer Size False  
 Settable Baud Rate True  
 Settable Data Bits True

Settable Flow Control True  
 Settable Parity True  
 Settable Parity Check True  
 Settable Stop Bits True  
 Settable RLSD True  
 Supports RLSD True  
 Supports 16 Bit Mode False  
 Supports Special Characters False  
 Baud Rate 9600  
 Bits/Byte 8  
 Stop Bits 1  
 Parity None  
 Busy 0  
 Abort Read/Write on Error 0  
 Binary Mode Enabled -1  
 Continue XMit on XOff 0  
 CTS Outflow Control 0  
 Discard NULL Bytes 0  
 DSR Outflow Control 0  
 DSR Sensitivity 0  
 DTR Flow Control Type Enable  
 EOF Character 0  
 Error Replace Character 0  
 Error Replacement Enabled 0  
 Event Character 0  
 Parity Check Enabled 0  
 RTS Flow Control Type Enable  
 XOff Character 19  
 XOffXMit Threshold 512  
 XOn Character 17  
 XOnXMit Threshold 2048  
 XOnXOff InFlow Control 0  
 XOnXOff OutFlow Control 0  
 IRQ Number 4  
 I/O Port 0x03F8-0x03FF  
 Driver c:\winnt\system32\drivers\serial.sys (62416, 5.00.2195.2780)

Name COM2  
 Status OK  
 PNP Device ID ACPI\PNP0501\2  
 Maximum Input Buffer Size 0  
 Maximum Output Buffer Size False  
 Settable Baud Rate True  
 Settable Data Bits True  
 Settable Flow Control True  
 Settable Parity True  
 Settable Parity Check True  
 Settable Stop Bits True  
 Settable RLSD True  
 Supports RLSD True  
 Supports 16 Bit Mode False  
 Supports Special Characters False  
 Baud Rate 9600  
 Bits/Byte 8  
 Stop Bits 1  
 Parity None  
 Busy 0  
 Abort Read/Write on Error 0  
 Binary Mode Enabled -1  
 Continue XMit on XOff 0  
 CTS Outflow Control 0  
 Discard NULL Bytes 0  
 DSR Outflow Control 0  
 DSR Sensitivity 0  
 DTR Flow Control Type Enable  
 EOF Character 0  
 Error Replace Character 0  
 Error Replacement Enabled 0

Event Character 0  
 Parity Check Enabled 0  
 RTS Flow Control Type Enable  
 XOff Character 19  
 XOffXMit Threshold 512  
 XOn Character 17  
 XOnXMit Threshold 2048  
 XOnXOff InFlow Control 0  
 XOnXOff OutFlow Control 0  
 IRQ Number 3  
 I/O Port 0x02F8-0x02FF  
 Driver c:\winnt\system32\drivers\serial.sys (62416, 5.00.2195.2780)

[Parallel]

Item	Value
Name	LPT1
PNP Device ID	ACPI\PNP0400\3&13C0B0C5&0

[Storage]

[ Following are sub-categories of this main category ]

[Drives]

Item	Value
Drive A:	
Description	3 1/2 Inch Floppy Drive
Drive C:	
Description	Local Fixed Disk
Compressed	False
File System	NTFS
Size	16.94 GB (18,194,284,544 bytes)
Free Space	13.91 GB (14,940,585,984 bytes)
Volume Name	
Volume Serial Number	08674715
Partition	Disk #0, Partition #0
Partition Size	16.94 GB (18,194,287,104 bytes)
Starting Offset	32256 bytes
Drive Description	Disk drive
Drive Manufacturer	(Standard disk drives)
Drive Model	IBM-PSG ST318203LC !# SCSI Disk Device
Drive BytesPerSector	512
Drive MediaLoaded	True
Drive MediaType	Fixed hard disk media
Drive Partitions	1
Drive SCSI Bus	0
Drive SCSI Logical Unit	0
Drive SCSI Port	2
Drive SCSI Target ID	5
Drive SectorsPerTrack	63
Drive Size	18194319360 bytes
Drive TotalCylinders	2212
Drive TotalSectors	35535780
Drive TotalTracks	564060
Drive TracksPerCylinder	255
Drive E:	
Description	Network Connection
Provider Name	\\192.168.132.253\e\$

[SCSI]

Item	Value
------	-------

Name	LSI Logic 1020/1030 Ultra320 SCSI Adapter
Caption	LSI Logic 1020/1030 Ultra320 SCSI Adapter
Driver	SYMMPI
Status	OK
PNP Device ID	PCI\VEN_1000&DEV_0030&SUBSYS_10001014&REV_07\5&21593F33&0&18F810
Device ID	PCI\VEN_1000&DEV_0030&SUBSYS_10001014&REV_07\5&21593F33&0&18F810
Device Map	Not Available
Index	Not Available
Max Number Controlled	Not Available
IRQ Number	32
I/O Port	0xA000-0xA0FF
Driver	c:\winnt\system32\drivers\symmpi.sys (38512, 1.08.22.00)

Name	LSI Logic 1020/1030 Ultra320 SCSI Adapter
Caption	LSI Logic 1020/1030 Ultra320 SCSI Adapter
Driver	SYMMPI
Status	OK
PNP Device ID	PCI\VEN_1000&DEV_0030&SUBSYS_10001014&REV_07\5&21593F33&0&19F810
Device ID	PCI\VEN_1000&DEV_0030&SUBSYS_10001014&REV_07\5&21593F33&0&19F810
Device Map	Not Available
Index	Not Available
Max Number Controlled	Not Available
IRQ Number	33
I/O Port	0xA400-0xA4FF
Driver	c:\winnt\system32\drivers\symmpi.sys (38512, 1.08.22.00)

[Printing]

Name	Port Name Server Name
No printing information	

[Problem Devices]

Device	PNP Device ID	Error Code
PCI Device	PCI\VEN_8086&DEV_2551&SUBSYS_25511014&REV_03\3&13C0B0C5&0&01	28
System Interrupt Controller	PCI\VEN_8086&DEV_1461&SUBSYS_00000000&REV_03\4&4E4AD31&0&E010	28
System Interrupt Controller	PCI\VEN_8086&DEV_1461&SUBSYS_00000000&REV_03\4&4E4AD31&0&F010	28
PCI Device	PCI\VEN_8086&DEV_2554&SUBSYS_25541014&REV_03\3&13C0B0C5&0&11	28
PCI Device	PCI\VEN_8086&DEV_24C3&SUBSYS_027A1014&REV_02\3&13C0B0C5&0&FB	28
Not Available	ACPI\IBM37D62&DABA3FF&0	28
Not Available	ACPI\ASF0001\2&DABA3FF&0	28

[USB]

Device	PNP Device ID
No USB Devices	

[Software Environment]

[ Following are sub-categories of this main category ]

[Drivers]

Name	Description	File	Type	Started	Start Mode
State	Status	Error Control	Accept Pause	Accept Stop	Accept Stop
abiosdsk	Abiosdsk	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Ignore	False	False
abp480n5	abp480n5	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
acpi	Microsoft ACPI Driver		c:\winnt\system32\drivers\acpi.sys	Running	OK
Kernel Driver	True	Boot	Running	OK	Normal
False	True				
acpiec	ACPIEC	c:\winnt\system32\drivers\acpiec.sys	Kernel Driver	False	Normal
Driver	False	Disabled	Stopped	OK	Normal
False					
adpu160m	adpu160m	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
afd	AFD Networking Support Environment				
c:\winnt\system32\drivers\afd.sys	Kernel Driver		True	Auto	
Running	OK	Normal	False	True	
aha154x	Aha154x	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
aic116x	aic116x	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
aic78u2	aic78u2	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
aic78xx	aic78xx	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
ami0nt	ami0nt	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
amsint	amsint	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
asc	asc	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
asc3350p	asc3350p	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
asc3550	asc3550	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
asynmac	RAS Asynchronous Media Driver				
c:\winnt\system32\drivers\asynmac.sys	Kernel Driver		False		
Manual	Stopped	OK	Normal	False	False
atapi	Standard IDE/ESDI Hard Disk Controller				
c:\winnt\system32\drivers\atapi.sys	Kernel Driver		True		
Boot	Running	OK	Normal	False	True
atdisk	Atdisk	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Ignore	False	False
atirage3	atirage3	c:\winnt\system32\drivers\atimpab.sys	Kernel Driver	True	Ignore
Driver	True	Manual	Running	OK	Ignore
True					
atmarpc	ATM ARP Client Protocol				
c:\winnt\system32\drivers\atmarpc.sys	Kernel Driver		False		
Manual	Stopped	OK	Normal	False	False
audstub	Audio Stub Driver	c:\winnt\system32\drivers\audstub.sys	Kernel Driver	Running	OK
Kernel Driver	True	Manual	Running	OK	Normal
False	True				
b57w2k	Broadcom NetXtreme Gigabit Ethernet				
c:\winnt\system32\drivers\b57w2k.sys	Kernel Driver		True		
Manual	Running	OK	Normal	False	True
beep	Beep	c:\winnt\system32\drivers\beep.sys	Kernel Driver	True	Normal
Driver	True	System	Running	OK	Normal
True					
buslogic	BusLogic	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False
cd20xrnt	cd20xrnt	Not Available	Kernel Driver	False	False
Disabled	Stopped	OK	Normal	False	False

cdaudio	Cdaudio	c:\winnt\system32\drivers\cdaudio.sys	Kernel Driver	False	System	Stopped	OK	Ignore	False
False									
cdfs	Cdfs	c:\winnt\system32\drivers\cdfs.sys	File System Driver	True	Disabled	Running	OK	Normal	False
True									
cdrom	CD-ROM Driver	c:\winnt\system32\drivers\cdrom.sys	Kernel Driver	False	True	System	Running	OK	Normal
False	True								
changer	Changer	Not Available	Kernel Driver	False					False
System	Stopped	OK	Ignore	False	False				
cpqarray	Cpqarray	Not Available	Kernel Driver	False					False
Disabled	Stopped	OK	Normal	False	False				
cpqarry2	cpqarry2	Not Available	Kernel Driver	False					False
Disabled	Stopped	OK	Normal	False	False				
cpqcalm	cpqcalm	Not Available	Kernel Driver	False					False
Disabled	Stopped	OK	Normal	False	False				
cpqfws2e	cpqfws2e	Not Available	Kernel Driver	False					False
Disabled	Stopped	OK	Normal	False	False				
dac960nt	dac960nt	Not Available	Kernel Driver	False					False
Disabled	Stopped	OK	Normal	False	False				
deckzpsx	deckzpsx	Not Available	Kernel Driver	False					False
Disabled	Stopped	OK	Normal	False	False				
dfsdriver	DfsDriver	c:\winnt\system32\drivers\dfs.sys	File System Driver	True	Boot	Running	OK	Normal	False
True	Boot	Running	OK	Normal	False	True			
disk	Disk Driver	c:\winnt\system32\drivers\disk.sys	Kernel Driver	True	Boot	Running	OK	Normal	False
False	True								
diskperf	Diskperf	c:\winnt\system32\drivers\diskperf.sys	Kernel Driver	True	Boot	Running	OK	Normal	False
True									
dmboot	dmboot	c:\winnt\system32\drivers\dmboot.sys	Kernel Driver	False	Disabled	Stopped	OK	Normal	False
False									
dmio	Logical Disk Manager Driver								
c:\winnt\system32\drivers\dmio.sys	Kernel Driver		True						
Boot	Running	OK	Normal	False	True				
dmload	dmload	c:\winnt\system32\drivers\dmload.sys	Kernel Driver	True	Boot	Running	OK	Normal	False
True									
e100b	Intel(R) PRO Adapter Driver								
c:\winnt\system32\drivers\e100bnt5.sys	Kernel Driver		True						
Manual	Running	OK	Normal	False	True				
efs	EFS	c:\winnt\system32\drivers\efs.sys	File System Driver	True	Disabled	Running	OK	Normal	False
True	Disabled	Running	OK	Normal	False	True			
fastfat	Fastfat	c:\winnt\system32\drivers\fastfat.sys	File System Driver	True	Disabled	Running	OK	Normal	False
True									
fd16_700	Fd16_700	Not Available	Kernel Driver	False					False
Disabled	Stopped	OK	Normal	False	False				
fdc	Floppy Disk Controller Driver	c:\winnt\system32\drivers\fdc.sys	Kernel Driver	True	Manual	Running	OK	Normal	False
False	True								
fips	Fips	c:\winnt\system32\drivers\fips.sys	Kernel Driver	True	Auto	Running	OK	Normal	False
True									
fireport	fireport	Not Available	Kernel Driver	False					False
Disabled	Stopped	OK	Normal	False	False				
flashpnt	flashpnt	Not Available	Kernel Driver	False					False
Disabled	Stopped	OK	Normal	False	False				
flpydisk	Floppy Disk Driver	c:\winnt\system32\drivers\flpydisk.sys	Kernel Driver	True	Manual	Running	OK	Normal	False
False	True								
ftdisk	Volume Manager Driver								
c:\winnt\system32\drivers\ftdisk.sys	Kernel Driver		True						
Boot	Running	OK	Normal	False	True				

gpc	Generic Packet Classifier												
c:\winnt\system32\drivers\msgpc.sys				Kernel Driver		True							
Manual	Running	OK	Normal	False	True								
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver												
c:\winnt\system32\drivers\i8042prt.sys				Kernel Driver		True							
System	Running	OK	Normal	False	True								
ini910u	ini910u Not Available				Kernel Driver		False						
Disabled	Stopped	OK	Normal	False	False								
intelide	IntelIde Not Available				Kernel Driver		False						
Disabled	Stopped	OK	Normal	False	False								
ipfilterdriver	IP Traffic Filter Driver												
c:\winnt\system32\drivers\ipfltdrv.sys				Kernel Driver		False							
Manual	Stopped	OK	Normal	False	False								
ipinip	IP in IP Tunnel Driver:c:\winnt\system32\drivers\ipinip.sys												
Kernel Driver				False	Manual	Stopped	OK	Normal					
False	False												
ipnat	IP Network Address Translator				c:\winnt\system32\drivers\ipnat.sys								
Kernel Driver				False	Manual	Stopped	OK	Normal					
False	False												
ipsec	IPSEC driver				c:\winnt\system32\drivers\ipsec.sys								
Kernel Driver				True	Manual	Running	OK	Normal					
False	True												
ipsraidn	ipsraidn Not Available				Kernel Driver		False						
Disabled	Stopped	OK	Normal	False	False								
isapnp	PnP ISA/EISA Bus Driver												
c:\winnt\system32\drivers\isapnp.sys				Kernel Driver		True							
Boot	Running	OK	Critical	False	True								
kbdclass	Keyboard Class Driver												
c:\winnt\system32\drivers\kbdclass.sys				Kernel Driver		True							
System	Running	OK	Normal	False	True								
ksecdd	KSecDD c:\winnt\system32\drivers\ksecdd.sys												
Driver				True	Boot	Running	OK	Normal	False				
True													
lbrtfdc	lbrtfdc Not Available				Kernel Driver		False						
System	Stopped	OK	Ignore	False	False								
lp6nds35	lp6nds35 Not Available				Kernel Driver		False						
Disabled	Stopped	OK	Normal	False	False								
mnmdd	mnmdd c:\winnt\system32\drivers\mnmdd.sys												
Driver				True	System	Running	OK	Ignore	False				
True													
modem	Modem c:\winnt\system32\drivers\modem.sys												
Driver				False	Manual	Stopped	OK	Ignore	False				
False													
mouclass	Mouse Class Driver				c:\winnt\system32\drivers\mouclass.sys								
Kernel Driver				True	System	Running	OK	Normal					
False	True												
mountmgr	MountMgrc:\winnt\system32\drivers\mountmgr.sys												
Driver				True	Boot	Running	OK	Normal	False				
True													
mraid35x	mraid35x Not Available				Kernel Driver		False						
Disabled	Stopped	OK	Normal	False	False								
mrxsmb	MRXSMBc:\winnt\system32\drivers\mrxsmb.sys												
Driver				True	System	Running	OK	Normal	False				
True													
msfs	Msfs c:\winnt\system32\drivers\msfs.sys												
Driver				True	System	Running	OK	Normal	False				
True													
mskssrv	Microsoft Streaming Service Proxy												
c:\winnt\system32\drivers\mskssrv.sys				Kernel Driver		False							
Manual	Stopped	OK	Normal	False	False								
mspclock	Microsoft Streaming Clock Proxy												
c:\winnt\system32\drivers\mspclock.sys				Kernel Driver		False							
Manual	Stopped	OK	Normal	False	False								
mspqm	Microsoft Streaming Quality Manager Proxy												
c:\winnt\system32\drivers\mspqm.sys				Kernel Driver		False							
Manual	Stopped	OK	Normal	False	False								
mup	Mup c:\winnt\system32\drivers\mup.sys												
Driver				True	Boot	Running	OK	Normal	False				
True													
ncrc710	Nrc710 Not Available				Kernel Driver		False						
Disabled	Stopped	OK	Normal	False	False								
ndis	NDIS System Driver c:\winnt\system32\drivers\ndis.sys												
Kernel Driver				True	Boot	Running	OK	Normal					
False	True												
ndistapi	Remote Access NDIS TAPI Driver												
c:\winnt\system32\drivers\ndistapi.sys				Kernel Driver		True							
Manual	Running	OK	Normal	False	True								
ndiswan	Remote Access NDIS WAN Driver												
c:\winnt\system32\drivers\ndiswan.sys				Kernel Driver		True							
Manual	Running	OK	Normal	False	True								
ndproxy	NDIS Proxy c:\winnt\system32\drivers\ndproxy.sys												
Kernel Driver				True	Manual	Running	OK	Normal					
False	True												
netbios	NetBIOS Interface c:\winnt\system32\drivers\netbios.sys												
File System Driver				True	System	Running	OK	Normal					
False	True												
netbt	NetBios over Tcpip c:\winnt\system32\drivers\netbt.sys												
Kernel Driver				True	System	Running	OK	Normal					
False	True												
netdetect	NetDetect c:\winnt\system32\drivers\netdetect.sys												
Driver				False	Manual	Stopped	OK	Normal	False				
False													
npfs	Npfs c:\winnt\system32\drivers\npfs.sys												
Driver				True	System	Running	OK	Normal	False				
True													
ntfs	Ntfs c:\winnt\system32\drivers\ntfs.sys												
Driver				True	Disabled	Running	OK	Normal	False				
True													
null	Null c:\winnt\system32\drivers\null.sys												
Driver				True	System	Running	OK	Normal	False				
True													
nwlnkflt	IPX Traffic Filter Driver												
c:\winnt\system32\drivers\nwlnkflt.sys				Kernel Driver		False							
Manual	Stopped	OK	Normal	False	False								
nwlnkfwd	IPX Traffic Forwarder Driver												
c:\winnt\system32\drivers\nwlnkfwd.sys				Kernel Driver		False							
Manual	Stopped	OK	Normal	False	False								
parallel	Parallel class driver c:\winnt\system32\drivers\parallel.sys												
Kernel Driver				True	Manual	Running	OK	Normal					
False	True												
parport	Parallel port driver c:\winnt\system32\drivers\parport.sys												
Kernel Driver				True	System	Running	OK	Ignore					
False	True												
partmgr	PartMgr c:\winnt\system32\drivers\partmgr.sys												
Driver				True	Boot	Running	OK	Normal	False				
True													
parvdm	ParVdm c:\winnt\system32\drivers\parvdm.sys												
Driver				True	Auto	Running	OK	Ignore	False				
True													
pci	PCI Bus Driver c:\winnt\system32\drivers\pci.sys												
Driver				True	Boot	Running	OK	Critical	False				
True													
pcidump	PCIDump Not Available				Kernel Driver		False						
System	Stopped	OK	Ignore	False	False								
pciide	PCIIde c:\winnt\system32\drivers\pciide.sys												
Driver				True	Boot	Running	OK	Normal	False				
True													
pcmcia	Pcmcia c:\winnt\system32\drivers\pcmcia.sys												
Driver				False	Disabled	Stopped	OK	Normal	False				
False													
pdcomp	PDCOMP Not Available				Kernel Driver		False						
Manual	Stopped	OK	Ignore	False	False								
pdframe	PDFRAME Not Available				Kernel Driver		False						
False	Manual	Stopped	OK	Ignore	False	False							



pdreli	PDRELI	Not Available	Kernel Driver	False	
Manual	Stopped	OK	Ignore	False	False
pdrframe	PDRFRAME	Not Available	Kernel Driver		
False	Manual	Stopped	OK	Ignore	False
pptpminiport	WAN Miniport (PPTP)				
c:\winnt\system32\drivers\raspptp.sys					Kernel Driver
Manual	Running	OK	Normal	False	True
ptlink	Direct Parallel Link Driver				
c:\winnt\system32\drivers\ptlink.sys					Kernel Driver
Manual	Running	OK	Normal	False	True
ql1080	ql1080	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
ql10wnt	ql10wnt	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
ql1240	ql1240	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
ql2100	ql2100	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
rasacd	Remote Access Auto Connection Driver				
c:\winnt\system32\drivers\rasacd.sys					Kernel Driver
System	Running	OK	Normal	False	True
rasl2tp	WAN Miniport (L2TP)				
c:\winnt\system32\drivers\rasl2tp.sys					Kernel Driver
Manual	Running	OK	Normal	False	True
raspti	Direct Parallel				
Kernel Driver	True	Manual	Running	OK	Normal
False	True				
rca	Microsoft Streaming Network Raw Channel Access				
c:\winnt\system32\drivers\rca.sys					Kernel Driver
Stopped	OK	Normal	False	False	Manual
rdbss	Rdbss	c:\winnt\system32\drivers\rdbss.sys			File System
Driver	True	System	Running	OK	Normal
True					
rdpwd	RDPWD	c:\winnt\system32\drivers\rdpwd.sys			Kernel
Driver	False	Manual	Stopped	OK	Ignore
False					
redbook	Digital CD Audio Playback Filter Driver				
c:\winnt\system32\drivers\redbook.sys					Kernel Driver
System	Stopped	OK	Normal	False	False
serenum	Serenum Filter Driver				
Kernel Driver	True	Manual	Running	OK	Normal
False	True				
serial	Serial port driver				
Kernel Driver	True	System	Running	OK	Ignore
False	True				
sfloppy	Sfloppy	c:\winnt\system32\drivers\sfloppy.sys			Kernel
Driver	False	System	Stopped	OK	Ignore
False					
sglfb	sglfb	Not Available	Kernel Driver	False	
System	Stopped	OK	Normal	False	False
simbad	Simbad	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
sparrow	Sparrow	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
spud	Special Purpose Utility Driver				
Kernel Driver	True	Manual	Running	OK	Normal
False	True				
srv	Srv	c:\winnt\system32\drivers\srv.sys			File System Driver
True	Manual	Running	OK	Normal	False
swenum	Software Bus Driver				
Kernel Driver	True	Manual	Running	OK	Normal
False	True				
symc810	symc810	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
symc8xx	symc8xx	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
symmpi	symmpi	c:\winnt\system32\drivers\symmpi.sys			Kernel
Driver	True	Boot	Running	OK	Normal
True					
sym_hi	sym_hi	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
tcpip	TCP/IP Protocol Driver				
Kernel Driver	True	System	Running	OK	Normal
False	True				
tdasync	TDASYNC				
Kernel Driver	False	Manual	Stopped	OK	Ignore
False	False				
tdipx	TDIPX	c:\winnt\system32\drivers\tdipx.sys			Kernel
Driver	False	Manual	Stopped	OK	Ignore
False					
tdnetb	TDNETB	c:\winnt\system32\drivers\tdnetb.sys			Kernel
Driver	False	Manual	Stopped	OK	Ignore
False					
tdpipe	TDPIPE	c:\winnt\system32\drivers\tdpipe.sys			Kernel
Driver	False	Manual	Stopped	OK	Ignore
False					
tdspx	TDSPX	c:\winnt\system32\drivers\tdspx.sys			Kernel
Driver	False	Manual	Stopped	OK	Ignore
False					
tdtcp	TDTCP	c:\winnt\system32\drivers\tdtcp.sys			Kernel
Driver	False	Manual	Stopped	OK	Ignore
False					
termdd	Terminal Device Driver				
c:\winnt\system32\drivers\termdd.sys					Kernel Driver
Disabled	Stopped	OK	Normal	False	False
tga	tga	Not Available	Kernel Driver	False	
System	Stopped	OK	Ignore	False	False
udfs	Udfs	c:\winnt\system32\drivers\udfs.sys			File System
Driver	False	Disabled	Stopped	OK	Normal
False					
ultra66	ultra66	Not Available	Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False
update	Microcode Update Driver				
c:\winnt\system32\drivers\update.sys					Kernel Driver
Manual	Running	OK	Normal	False	True
vgasave	VgaSave	c:\winnt\system32\drivers\vga.sys			Kernel
Driver	True	System	Running	OK	Ignore
True					
wanarp	Remote Access IP ARP Driver				
c:\winnt\system32\drivers\wanarp.sys					Kernel Driver
Manual	Running	OK	Normal	False	True
wdica	WDICA	Not Available	Kernel Driver	False	
Manual	Stopped	OK	Ignore	False	False
[Environment Variables]					
Variable	Value	User Name			
ComSpec	%SystemRoot%\system32\cmd.exe	<SYSTEM>			
Os2LibPath	%SystemRoot%\system32\os2\dll;	<SYSTEM>			
Path	%SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;				
	C:\Program Files\Microsoft SQL Server\80\Tools\BINN	<SYSTEM>			
windir	%SystemRoot%	<SYSTEM>			
OS	Windows_NT	<SYSTEM>			
PROCESSOR_ARCHITECTURE	x86	<SYSTEM>			
PROCESSOR_LEVEL	15	<SYSTEM>			
PROCESSOR_IDENTIFIER	x86 Family 15 Model 2 Stepping 7,				
GenuineIntel	<SYSTEM>				
PROCESSOR_REVISION	0207	<SYSTEM>			
NUMBER_OF_PROCESSORS	2	<SYSTEM>			
PATHEXT	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH	<SYSTEM>			
TEMP	%SystemRoot%\TEMP	<SYSTEM>			
TMP	%SystemRoot%\TEMP	<SYSTEM>			

TEMP %USERPROFILE%\Local Settings\Temp  
 CLIENT10\Administrator  
 TMP %USERPROFILE%\Local Settings\Temp  
 CLIENT10\Administrator

[Jobs]

[ Following are sub-categories of this main category ]

[Print]

Document Size	Owner	Notify	Status	Time Submitted
Start Time	Until Time	Elapsed Time	Pages Printed	Job ID
Priority	Parameters	Driver Name	Print Processor	Host Print
Queue	Data Type	Name		

No print jobs

[Network Connections]

Local Name	Remote Name	Type	Status	User Name
E:	\\192.168.132.253\c\$	Disk	OK	

CLIENT10\Administrator

[Running Tasks]

Name	Path	Process ID	Priority	Min Working Set	Max Working Set
system idle process		Not Available		0	0
Available	Not Available		Not Available	Unknown	Unknown
system	Not Available	8	8	0	1413120
Not Available		Unknown	Unknown	Unknown	
smss.exe	c:\winnt\system32\smss.exe	164	11	204800	
1413120	2/23/2003 4:23:36 PM	5.00.2195.2901		44.27 KB	
(45,328 bytes)	12/7/1999 7:00:00 AM				
csrss.exe	Not Available	188	13	Not Available	
Not Available	2/23/2003 4:23:41 PM		Unknown	Unknown	
Unknown					
winlogon.exe	c:\winnt\system32\winlogon.exe	184	13	204800	
1413120	2/23/2003 4:23:42 PM	5.00.2195.2953		173.77 KB (177,936 bytes)	
12/7/1999 7:00:00 AM					
services.exe	c:\winnt\system32\services.exe	236	9	204800	
1413120	2/23/2003 4:23:43 PM	5.00.2195.2780		86.77 KB (88,848 bytes)	
12/7/1999 7:00:00 AM					
lsass.exe	c:\winnt\system32\lsass.exe	248	9	204800	
1413120	2/23/2003 4:23:44 PM	5.00.2195.2964		32.77 KB	
(33,552 bytes)	12/7/1999 7:00:00 AM				
svchost.exe	c:\winnt\system32\svchost.exe	416	8	204800	
1413120	2/23/2003 4:23:47 PM	5.00.2134.1		7.77 KB (7,952 bytes)	
12/7/1999 7:00:00 AM					
spoolsv.exe	c:\winnt\system32\spoolsv.exe	448	8	204800	
1413120	2/23/2003 4:23:48 PM	5.00.2161.1		43.77 KB (44,816 bytes)	
2/10/2003 11:47:14 AM					
msdtc.exe	c:\winnt\system32\msdtc.exe	476	8	204800	
1413120	2/23/2003 4:23:48 PM	1999.9.3421.3		6.77 KB	
(6,928 bytes)	2/10/2003 11:57:24 AM				
svchost.exe	c:\winnt\system32\svchost.exe	608	8	204800	
1413120	2/23/2003 4:23:50 PM	5.00.2134.1		7.77 KB (7,952 bytes)	
12/7/1999 7:00:00 AM					
llssrv.exe	c:\winnt\system32\llssrv.exe	632	9	204800	
1413120	2/23/2003 4:23:50 PM	5.00.2195.2649		117,008 bytes)	
5/4/2001 1:05:02 PM					
regsvc.exe	c:\winnt\system32\regsvc.exe	704	8	204800	
1413120	2/23/2003 4:23:50 PM	5.00.2195.2104		65.27 KB	
(66,832 bytes)	2/10/2003 5:30:11 PM				

mstask.exe	c:\winnt\system32\mstask.exe	840	8	204800	
1413120	2/23/2003 4:24:03 PM	4.71.2195.1		115.27 KB	
(118,032 bytes)	2/10/2003 5:30:05 PM				
tcpsvcs.exe	c:\winnt\system32\tcpsvcs.exe	876	8	204800	
1413120	2/23/2003 4:24:03 PM	5.00.2134.1		24.77 KB (25,360 bytes)	
12/7/1999 7:00:00 AM					
winmgmt.exe	c:\winnt\system32\wbem\winmgmt.exe	908	8	204800	
1413120	2/23/2003 4:24:03 PM	1.50.1085.0029		192.08 KB (196,685 bytes)	
2/10/2003 5:30:22 PM					
dfssvc.exe	c:\winnt\system32\dfssvc.exe	800	8	204800	
1413120	2/23/2003 4:24:08 PM	5.00.2195.2841		88.27 KB	
(90,384 bytes)	2/10/2003 5:29:52 PM				
svchost.exe	c:\winnt\system32\svchost.exe	1132	8	204800	
1413120	2/23/2003 4:25:19 PM	5.00.2134.1		7.77 KB (7,952 bytes)	
12/7/1999 7:00:00 AM					
explorer.exe	c:\winnt\explorer.exe	1224	8	204800	
1413120	2/23/2003 4:25:23 PM	5.00.3315.2846		237.27 KB	
(242,960 bytes)	2/10/2003 5:30:17 PM				
iexplore.exe	c:\program files\internet explorer\iexplore.exe				
1108	8	204800	1413120	2/23/2003 4:26:21 PM	
5.00.2920.0000				59.27 KB (60,688 bytes)	
2/10/2003 5:01:11 PM					
dllhost.exe	Not Available	1168	8	Not Available	
Not Available	2/23/2003 4:26:23 PM			Unknown	Unknown
Unknown					
mdm.exe	c:\winnt\system32\mdm.exe	1440	8	204800	
1413120	2/23/2003 4:26:24 PM	6.00.8424		121.29 KB (124,200 bytes)	
2/10/2003 11:59:09 AM					
cmd.exe	c:\winnt\system32\cmd.exe	1528	8	204800	
1413120	2/23/2003 7:34:07 PM	5.00.2195.2104		230.77 KB	
(236,304 bytes)	12/7/1999 7:00:00 AM				
mmc.exe	c:\winnt\system32\mmc.exe	1340	8	204800	
1413120	2/24/2003 7:42:02 AM	5.00.2195.2301		589.27 KB	
(603,408 bytes)	2/10/2003 5:29:59 PM				
rsvp.exe	c:\winnt\system32\rsvp.exe	1932	8	204800	
1413120	2/24/2003 7:43:22 AM	5.00.2167.1		172.77 KB	
(176,912 bytes)	12/7/1999 7:00:00 AM				

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer	Path
traffic.dll	5.00.2139.1	30.77 KB (31,504 bytes)			12/7/1999
7:00:00 AM				Microsoft Corporation	
c:\winnt\system32\traffic.dll					
rsvp.exe	5.00.2167.1	172.77 KB (176,912 bytes)			12/7/1999
7:00:00 AM				Microsoft Corporation	
c:\winnt\system32\rsvp.exe					
wbemprox.dll	1.50.1085.0045	40.08 KB (41,040 bytes)			
2/10/2003 5:30:22 PM				Microsoft Corporation	
c:\winnt\system32\wbem\wbemprox.dll					
rassapi.dll	5.00.2188.1	14.27 KB (14,608 bytes)			12/7/1999
7:00:00 AM				Microsoft Corporation	
c:\winnt\system32\rassapi.dll					
adsnt.dll	5.00.2195.2778	195.27 KB (199,952 bytes)			2/10/2003
5:29:48 PM				Microsoft Corporation	
c:\winnt\system32\adsnt.dll					
dbghelp.dll	5.00.2195.2104	159.27 KB (163,088 bytes)			
5/4/2001 1:05:02 PM				Microsoft Corporation	
c:\winnt\system32\dbghelp.dll					
localsec.dll	5.00.2195.2130	230.27 KB (235,792 bytes)			
2/10/2003 5:29:58 PM				Microsoft Corporation	
c:\winnt\system32\localsec.dll					
devmgr.dll	5.00.2166.1	215.77 KB (220,944 bytes)			12/7/1999
7:00:00 AM				Microsoft Corporation	
c:\winnt\system32\devmgr.dll					
filemgmt.dll	5.00.2195.2165	287.27 KB (294,160 bytes)			
2/10/2003 5:29:55 PM				Microsoft Corporation	
c:\winnt\system32\filemgmt.dll					

pdh.dll	5.00.2195.2739	147.77 KB (151,312 bytes)	2/10/2003 5:30:10 PM	Microsoft Corporation	c:\winnt\system32\pdh.dll
smlogcfg.dll	5.00.2195.2485	273.27 KB (279,824 bytes)	2/10/2003 5:30:14 PM	Microsoft Corporation	c:\winnt\system32\smlogcfg.dll
cabinet.dll	5.00.2147.1	54.77 KB (56,080 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\cabinet.dll
msinfo32.dll	5.00.2177.1	312.27 KB (319,760 bytes)	2/10/2003 5:01:28 PM	Microsoft Corporation	c:\program files\common files\microsoft shared\msinfo\msinfo32.dll
riched20.dll	5.30.23.1205	421.27 KB (431,376 bytes)	2/10/2003 5:30:11 PM	Microsoft Corporation	c:\winnt\system32\riched20.dll
riched32.dll	5.00.2134.1	3.77 KB (3,856 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\riched32.dll
els.dll	5.00.2175.1	151.27 KB (154,896 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\els.dll
ntsmmgr.dll	1,0,0,1	427.77 KB (438,032 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation and HighGround Systems, Inc.	c:\winnt\system32\ntsmmgr.dll
mmfutil.dll	5.0.1085.0000	32.06 KB (32,829 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\mmfutil.dll
logdrive.dll	1.50.1085.0000	200.06 KB (204,863 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\logdrive.dll
dfrgres.dll	5.00.2150.1	27.50 KB (28,160 bytes)	12/7/1999 7:00:00 AM	Executive Software International, Inc.	c:\winnt\system32\dfrgres.dll
dfrgsnap.dll	5.00.2195.2104	41.77 KB (42,768 bytes)	2/10/2003 5:29:52 PM	Executive Software International, Inc.	c:\winnt\system32\dfrgsnap.dll
dmkskres.dll	2195.2104.297.3	119.50 KB (122,368 bytes)	2/10/2003 5:29:52 PM	Microsoft Corp., VERITAS Software	c:\winnt\system32\dmkskres.dll
dmutil.dll	2195.2104.297.3	42.27 KB (43,280 bytes)	2/10/2003 5:29:52 PM	VERITAS Software Corp.	c:\winnt\system32\dmutil.dll
ntmsapi.dll	5.00.1948.1	51.77 KB (53,008 bytes)	2/10/2003 5:30:08 PM	Microsoft Corporation	c:\winnt\system32\ntmsapi.dll
dmkskmgr.dll	2215.2215.297.3	160.27 KB (164,112 bytes)	2/10/2003 5:29:52 PM	Microsoft Corp., VERITAS Software	c:\winnt\system32\dmkskmgr.dll
mycomput.dll	5.00.2134.1	107.77 KB (110,352 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\mycomput.dll
mmcmdmgr.dll	5.00.2178.1	815.27 KB (834,832 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\mmcmdmgr.dll
mmc.exe	5.00.2195.2301	589.27 KB (603,408 bytes)	2/10/2003 5:29:59 PM	Microsoft Corporation	c:\winnt\system32\mmc.exe
cmd.exe	5.00.2195.2104	230.77 KB (236,304 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\cmd.exe
mdm.exe	6.00.8424	121.29 KB (124,200 bytes)	2/10/2003 11:59:09 AM	Microsoft Corporation	c:\winnt\system32\mdm.exe
sensapi.dll	5.00.2163.1	6.77 KB (6,928 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\sensapi.dll
iexplore.exe	5.00.2920.0000	59.27 KB (60,688 bytes)	2/10/2003 5:01:11 PM	Microsoft Corporation	c:\program files\internet explorer\iexplore.exe
mshtml.dll	5.00.3315.2870	227.27 KB (232,720 bytes)	2/10/2003 5:30:01 PM	Microsoft Corporation	c:\winnt\system32\mshtml.dll
imm32.dll	5.00.2195.2821	94.27 KB (96,528 bytes)	2/10/2003 5:29:56 PM	Microsoft Corporation	c:\winnt\system32\imm32.dll
netplwiz.dll	5.00.2195.2370	169.77 KB (173,840 bytes)	2/10/2003 5:30:07 PM	Microsoft Corporation	c:\winnt\system32\netplwiz.dll
netmsg.dll	5.00.2137.1	152.50 KB (156,160 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\netmsg.dll
netui2.dll	5.00.2134.1	280.27 KB (286,992 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\netui2.dll
mprui.dll	5.00.2195.2104	54.77 KB (56,080 bytes)	2/10/2003 5:29:59 PM	Microsoft Corporation	c:\winnt\system32\mprui.dll
imgutil.dll	5.00.3315.2870	30.77 KB (31,504 bytes)	2/10/2003 5:29:56 PM	Microsoft Corporation	c:\winnt\system32\imgutil.dll
webvw.dll	5.00.2920.0000	1.06 MB (1,115,408 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\webvw.dll
mshls31.dll	3.10.337.0	145.27 KB (148,752 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\mshls31.dll
msdbg.dll	6.00.8424	67.50 KB (69,120 bytes)	2/10/2003 11:59:10 AM	Microsoft Corporation	c:\winnt\system32\msdbg.dll
shdoclc.dll	5.00.3315.2879	324.50 KB (332,288 bytes)	2/10/2003 5:30:13 PM	Microsoft Corporation	c:\winnt\system32\shdoclc.dll
pdm.dll	6.00.8424	179.27 KB (183,574 bytes)	2/10/2003 11:59:10 AM	Microsoft Corporation	c:\winnt\system32\pdm.dll
mshtml.dll	5.00.3315.2870	2.24 MB (2,345,232 bytes)	2/10/2003 5:30:00 PM	Microsoft Corporation	c:\winnt\system32\mshtml.dll
mlang.dll	5.00.3103.1000	510.77 KB (523,024 bytes)	2/10/2003 5:29:59 PM	Microsoft Corporation	c:\winnt\system32\mlang.dll
urlmon.dll	5.00.3315.1000	441.27 KB (451,856 bytes)	2/10/2003 5:30:15 PM	Microsoft Corporation	c:\winnt\system32\urlmon.dll
linkinfo.dll	5.00.2134.1	15.77 KB (16,144 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\linkinfo.dll
wininet.dll	5.00.3315.1000	456.77 KB (467,728 bytes)	2/10/2003 5:30:16 PM	Microsoft Corporation	c:\winnt\system32\wininet.dll
browsecl.dll	5.00.3315.2846	34.50 KB (35,328 bytes)	2/10/2003 5:29:48 PM	Microsoft Corporation	c:\winnt\system32\browsecl.dll
faxshell.dll	5.00.2134.1	8.27 KB (8,464 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\faxshell.dll
msacm32.dll	5.00.2134.1	65.27 KB (66,832 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\msacm32.dll
avifil32.dll	5.00.2134.1	76.27 KB (78,096 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\avifil32.dll
msvfw32.dll	5.00.2134.1	113.77 KB (116,496 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\msvfw32.dll
docprop2.dll	5.00.2178.1	297.77 KB (304,912 bytes)	12/7/1999 7:00:00 AM	Microsoft Corporation	c:\winnt\system32\docprop2.dll
msi.dll	1.11.2405.0	1.69 MB (1,767,184 bytes)	2/10/2003 5:30:01 PM	Microsoft Corporation	c:\winnt\system32\msi.dll

powrprof.dll	5.00.3103.1000	13.27 KB (13,584 bytes)	
2/10/2003 5:30:10 PM	Microsoft Corporation		
c:\winnt\system32\powrprof.dll			
batmeter.dll	5.00.3103.1000	20.27 KB (20,752 bytes)	
2/10/2003 5:29:48 PM	Microsoft Corporation		
c:\winnt\system32\batmeter.dll			
stobject.dll	5.00.2195.2780	79.27 KB (81,168 bytes)	2/10/2003
5:30:14 PM	Microsoft Corporation		
c:\winnt\system32\stobject.dll			
webcheck.dll	5.00.3315.1000	251.77 KB (257,808 bytes)	
2/10/2003 5:30:16 PM	Microsoft Corporation		
c:\winnt\system32\webcheck.dll			
ntshrui.dll	5.00.2134.1	46.77 KB (47,888 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\ntshrui.dll			
mydocs.dll	5.00.2920.0000	55.77 KB (57,104 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\mydocs.dll			
browseui.dll	5.00.3315.2846	788.77 KB (807,696 bytes)	
2/10/2003 5:29:48 PM	Microsoft Corporation		
c:\winnt\system32\browseui.dll			
shdocvw.dll	5.00.3315.2879	1.05 MB (1,104,144 bytes)	
2/10/2003 5:30:13 PM	Microsoft Corporation		
c:\winnt\system32\shdocvw.dll			
explorer.exe	5.00.3315.2846	237.27 KB (242,960 bytes)	
2/10/2003 5:30:17 PM	Microsoft Corporation		
c:\winnt\explorer.exe			
tapisrv.dll	5.00.2195.2955	169.27 KB (173,328 bytes)	2/10/2003
5:30:15 PM	Microsoft Corporation		
c:\winnt\system32\tapisrv.dll			
dfssvc.exe	5.00.2195.2841	88.27 KB (90,384 bytes)	2/10/2003
5:29:52 PM	Microsoft Corporation		
c:\winnt\system32\dfssvc.exe			
netui1.dll	5.00.2134.1	210.27 KB (215,312 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\netui1.dll			
netui0.dll	5.00.2134.1	70.27 KB (71,952 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\netui0.dll			
ntlanman.dll	5.00.2157.1	35.27 KB (36,112 bytes)	
12/7/1999 7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\ntlanman.dll			
wshnetbs.dll	5.00.2134.1	7.77 KB (7,952 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\wshnetbs.dll			
ntmarta.dll	5.00.2195.2862	98.77 KB (101,136 bytes)	2/10/2003
5:30:08 PM	Microsoft Corporation		
c:\winnt\system32\ntmarta.dll			
provthrd.dll	1.50.1085.0000	68.07 KB (69,708 bytes)	
2/10/2003 5:01:22 PM	Microsoft Corporation		
c:\winnt\system32\wbem\provthrd.dll			
ntevt.dll	1.50.1085.0000	192.06 KB (196,669 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\wbem\ntevt.dll			
perfos.dll	5.00.2155.1	21.27 KB (21,776 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\perfos.dll			
psapi.dll	5.00.2134.1	28.27 KB (28,944 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\psapi.dll			
framedyn.dll	1.50.1085.0000	164.05 KB (167,992 bytes)	
12/7/1999 7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\wbem\framedyn.dll			
cimwin32.dll	1.50.1085.0038	1.02 MB (1,073,232 bytes)	
2/10/2003 5:30:21 PM	Microsoft Corporation		
c:\winnt\system32\wbem\cimwin32.dll			
wbemsvc.dll	1.50.1085.0007	40.07 KB (41,036 bytes)	
2/10/2003 5:30:22 PM	Microsoft Corporation		
c:\winnt\system32\wbem\wbemsvc.dll			
wbemess.dll	1.50.1085.0039	364.07 KB (372,804 bytes)	
2/10/2003 5:30:22 PM	Microsoft Corporation		
c:\winnt\system32\wbem\wbemess.dll			
fastprox.dll	1.50.1085.0037	144.08 KB (147,536 bytes)	
2/10/2003 5:30:21 PM	Microsoft Corporation		
c:\winnt\system32\wbem\fastprox.dll			
wbemcore.dll	1.50.1085.0036	628.07 KB (643,140 bytes)	
2/10/2003 5:30:22 PM	Microsoft Corporation		
c:\winnt\system32\wbem\wbemcore.dll			
wbemcomn.dll	1.50.1085.0021	692.07 KB (708,675 bytes)	
2/10/2003 5:30:21 PM	Microsoft Corporation		
c:\winnt\system32\wbem\wbemcomn.dll			
winmgmt.exe	1.50.1085.0029	192.08 KB (196,685 bytes)	
2/10/2003 5:30:22 PM	Microsoft Corporation		
c:\winnt\system32\wbem\winmgmt.exe			
simptcp.dll	5.00.2134.1	19.27 KB (19,728 bytes)	2/10/2003
11:57:19 AM	Microsoft Corporation		
c:\winnt\system32\simptcp.dll			
tcpsvcs.exe	5.00.2134.1	24.77 KB (25,360 bytes)	
12/7/1999 7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\tcpsvcs.exe			
msidle.dll	5.00.2920.0000	6.27 KB (6,416 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation			
c:\winnt\system32\msidle.dll			
mstask.exe	4.71.2195.1	115.27 KB (118,032 bytes)	2/10/2003
5:30:05 PM	Microsoft Corporation		
c:\winnt\system32\mstask.exe			
regsvc.exe	5.00.2195.2104	65.27 KB (66,832 bytes)	2/10/2003
5:30:11 PM	Microsoft Corporation		
c:\winnt\system32\regsvc.exe			
llsrpc.dll	5.00.2149.1	45.77 KB (46,864 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\llsrpc.dll			
llsrvr.exe	5.00.2195.2649	114.27 KB (117,008 bytes)	5/4/2001
1:05:02 PM	Microsoft Corporation		
c:\winnt\system32\llsrvr.exe			
wmi.dll	5.00.2191.1	6.27 KB (6,416 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation			
c:\winnt\system32\wmi.dll			
netshell.dll	5.00.2195.2779	457.27 KB (468,240 bytes)	2/10/2003
5:30:07 PM	Microsoft Corporation		
c:\winnt\system32\netshell.dll			
netman.dll	5.00.2195.2779	89.27 KB (91,408 bytes)	2/10/2003
5:30:06 PM	Microsoft Corporation		
c:\winnt\system32\netman.dll			
rasdlg.dll	5.00.2195.2671	514.27 KB (526,608 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\rasdlg.dll			
netcfgx.dll	5.00.2195.2228	534.77 KB (547,600 bytes)	2/10/2003
5:30:06 PM	Microsoft Corporation		
c:\winnt\system32\netcfgx.dll			
rasmans.dll	5.00.2195.2728	147.27 KB (150,800 bytes)	
2/10/2003 5:30:11 PM	Microsoft Corporation		
c:\winnt\system32\rasmans.dll			
ntmsdba.dll	5.00.2195.2779	167.27 KB (171,280 bytes)	
2/10/2003 5:30:08 PM	Microsoft Corporation		
c:\winnt\system32\ntmsdba.dll			
sens.dll	5.00.2163.1	36.77 KB (37,648 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\sens.dll			
iashlpr.dll	5.00.2184.1	33.27 KB (34,064 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\iashlpr.dll			
iasacct.dll	5.00.2134.1	28.27 KB (28,944 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\iasacct.dll			

iasuser.dll 5.00.2134.1	25.77 KB (26,384 bytes)	12/7/1999	es.dll 2000.2.3471.1	222.27 KB (227,600 bytes)	2/10/2003
7:00:00 AM	Microsoft Corporation		5:29:54 PM	Microsoft Corporation	
c:\winnt\system32\iasuser.dll			c:\winnt\system32\es.dll		
iasnap.dll 5.00.2195.2104	58.77 KB (60,176 bytes)	2/10/2003	mtxoci.dll 2000.2.3471.1	101.77 KB (104,208 bytes)	2/10/2003
5:29:55 PM	Microsoft Corporation		5:30:06 PM	Microsoft Corporation	
c:\winnt\system32\iasnap.dll			c:\winnt\system32\mtxoci.dll		
iaspipe.dll 5.00.2134.1	41.77 KB (42,768 bytes)	12/7/1999	resutils.dll 5.00.2195.2787	39.77 KB (40,720 bytes)	2/10/2003
7:00:00 AM	Microsoft Corporation		5:30:11 PM	Microsoft Corporation	
c:\winnt\system32\iaspipe.dll			c:\winnt\system32\resutils.dll		
expsrv.dll 6.0.8540	370.27 KB (379,152 bytes)	2/10/2003	5:29:54 PM	Microsoft Corporation	
Microsoft Corporation			c:\winnt\system32\expsrv.dll		
vbajet32.dll 6.1.8268	30.27 KB (30,992 bytes)	2/10/2003	5:30:16 PM	Microsoft Corporation	
5:30:16 PM	Microsoft Corporation		c:\winnt\system32\vbajet32.dll		
c:\winnt\system32\vbajet32.dll			msjtes40.dll 4.00.4229.0	236.27 KB (241,936 bytes)	
msjtes40.dll 4.00.4229.0	236.27 KB (241,936 bytes)	2/10/2003	5:30:04 PM	Microsoft Corporation	
2/10/2003 5:30:04 PM	Microsoft Corporation		c:\winnt\system32\msjtes40.dll		
c:\winnt\system32\msjtes40.dll			oledb32r.dll 2.70.9001.0	built by: Lab06_N(dagbuild)	64.00 KB (65,536 bytes)
oledb32r.dll 2.70.9001.0	built by: Lab06_N(dagbuild)	64.00 KB (65,536 bytes)	2/10/2003	5:55:10 PM	Microsoft Corporation
2/10/2003 5:55:10 PM	Microsoft Corporation		c:\program files\common files\system\ole db\oledb32r.dll		
c:\program files\common files\system\ole db\oledb32r.dll			comdlg32.dll 5.00.3103.1000	236.77 KB (242,448 bytes)	
comdlg32.dll 5.00.3103.1000	236.77 KB (242,448 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	
12/7/1999 7:00:00 AM	Microsoft Corporation		c:\winnt\system32\comdlg32.dll		
c:\winnt\system32\comdlg32.dll			msdart.dll 2.71.9031.4	built by: Lab06_N(dagbuild)	124.00 KB (126,976 bytes)
msdart.dll 2.71.9031.4	built by: Lab06_N(dagbuild)	124.00 KB (126,976 bytes)	9/27/2002	12:22:40 PM	Microsoft Corporation
9/27/2002 12:22:40 PM	Microsoft Corporation		c:\winnt\system32\msdart.dll		
c:\winnt\system32\msdart.dll			oledb32.dll 2.71.9031.4	built by: Lab06_N(dagbuild)	408.00 KB (417,792 bytes)
oledb32.dll 2.71.9031.4	built by: Lab06_N(dagbuild)	408.00 KB (417,792 bytes)	9/27/2002	12:22:42 PM	Microsoft Corporation
9/27/2002 12:22:42 PM	Microsoft Corporation		c:\program files\common files\system\ole db\oledb32.dll		
c:\program files\common files\system\ole db\oledb32.dll			msjint40.dll 4.00.2927.2	148.27 KB (151,824 bytes)	
msjint40.dll 4.00.2927.2	148.27 KB (151,824 bytes)	2/10/2003	5:30:03 PM	Microsoft Corporation	
2/10/2003 5:30:03 PM	Microsoft Corporation		c:\winnt\system32\msjint40.dll		
c:\winnt\system32\msjint40.dll			msjter40.dll 4.00.2927.2	52.27 KB (53,520 bytes)	
msjter40.dll 4.00.2927.2	52.27 KB (53,520 bytes)	2/10/2003	5:30:04 PM	Microsoft Corporation	
2/10/2003 5:30:04 PM	Microsoft Corporation		c:\winnt\system32\msjter40.dll		
c:\winnt\system32\msjter40.dll			mswstr10.dll 4.00.3829.2	600.27 KB (614,672 bytes)	
mswstr10.dll 4.00.3829.2	600.27 KB (614,672 bytes)	2/10/2003	5:30:05 PM	Microsoft Corporation	
2/10/2003 5:30:05 PM	Microsoft Corporation		c:\winnt\system32\mswstr10.dll		
c:\winnt\system32\mswstr10.dll			msjet40.dll 4.00.4431.3	1.43 MB (1,503,504 bytes)	2/10/2003
msjet40.dll 4.00.4431.3	1.43 MB (1,503,504 bytes)	2/10/2003	5:30:03 PM	Microsoft Corporation	
5:30:03 PM	Microsoft Corporation		c:\winnt\system32\msjet40.dll		
c:\winnt\system32\msjet40.dll			msjetoledb40.dll 4.00.4331.4	340.27 KB (348,432 bytes)	
msjetoledb40.dll 4.00.4331.4	340.27 KB (348,432 bytes)	2/10/2003	5:30:03 PM	Microsoft Corporation	
2/10/2003 5:30:03 PM	Microsoft Corporation		c:\winnt\system32\msjetoledb40.dll		
c:\winnt\system32\msjetoledb40.dll			iasrad.dll 5.00.2139.1	94.27 KB (96,528 bytes)	12/7/1999
iasrad.dll 5.00.2139.1	94.27 KB (96,528 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	
7:00:00 AM	Microsoft Corporation		c:\winnt\system32\iasrad.dll		
c:\winnt\system32\iasrad.dll			iassam.dll 5.00.2160.1	96.27 KB (98,576 bytes)	12/7/1999
iassam.dll 5.00.2160.1	96.27 KB (98,576 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	
7:00:00 AM	Microsoft Corporation		c:\winnt\system32\iassam.dll		
c:\winnt\system32\iassam.dll			iasads.dll 5.00.2134.1	73.77 KB (75,536 bytes)	12/7/1999
iasads.dll 5.00.2134.1	73.77 KB (75,536 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	
7:00:00 AM	Microsoft Corporation		c:\winnt\system32\iasads.dll		
c:\winnt\system32\iasads.dll			iaspolcy.dll 5.00.2134.1	25.27 KB (25,872 bytes)	
iaspolcy.dll 5.00.2134.1	25.27 KB (25,872 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	
12/7/1999 7:00:00 AM	Microsoft Corporation		c:\winnt\system32\iaspolcy.dll		
c:\winnt\system32\iaspolcy.dll			iassvcs.dll 5.00.2195.2104	58.77 KB (60,176 bytes)	2/10/2003
iassvcs.dll 5.00.2195.2104	58.77 KB (60,176 bytes)	2/10/2003	5:29:55 PM	Microsoft Corporation	
5:29:55 PM	Microsoft Corporation		c:\winnt\system32\iassvcs.dll		
c:\winnt\system32\iassvcs.dll			iaspdo.dll 5.00.2195.2104	261.77 KB (268,048 bytes)	2/10/2003
iaspdo.dll 5.00.2195.2104	261.77 KB (268,048 bytes)	2/10/2003	5:29:55 PM	Microsoft Corporation	
5:29:55 PM	Microsoft Corporation		c:\winnt\system32\iaspdo.dll		
c:\winnt\system32\iaspdo.dll			ntmssvc.dll 5.00.2195.2779	391.27 KB (400,656 bytes)	
ntmssvc.dll 5.00.2195.2779	391.27 KB (400,656 bytes)	2/10/2003	5:30:08 PM	Microsoft Corporation	
2/10/2003 5:30:08 PM	Microsoft Corporation		c:\winnt\system32\ntmssvc.dll		
c:\winnt\system32\ntmssvc.dll			ias.dll 5.00.2134.1	7.27 KB (7,440 bytes)	12/7/1999
ias.dll 5.00.2134.1	7.27 KB (7,440 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	
7:00:00 AM	Microsoft Corporation		c:\winnt\system32\ias.dll		
c:\winnt\system32\ias.dll					

iissuba.dll	5.00.0984	9.77 KB (10,000 bytes)	12/7/1999 7:00:00 AM	ntlsapi.dll	5.00.2134.1	6.77 KB (6,928 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\iissuba.dll		Microsoft Corporation		c:\winnt\system32\ntlsapi.dll	
dssenh.dll	5.00.2195.2228	142.77 KB (146,192 bytes)	2/10/2003 5:31:00 PM	xactsrv.dll	5.00.2134.1	90.27 KB (92,432 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\dssenh.dll		Microsoft Corporation		c:\winnt\system32\xactsrv.dll	
oakley.dll	5.00.2195.2785	378.77 KB (387,856 bytes)	2/10/2003 5:30:08 PM	wmicore.dll	5.00.2195.2842	72.27 KB (74,000 bytes)	2/10/2003 5:30:17 PM
Microsoft Corporation		c:\winnt\system32\oakley.dll		Microsoft Corporation		c:\winnt\system32\wmicore.dll	
mfc42u.dll	6.00.8665.0	972.05 KB (995,384 bytes)	12/7/1999 7:00:00 AM	rasadhlp.dll	5.00.2168.1	7.27 KB (7,440 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\mfc42u.dll		Microsoft Corporation		c:\winnt\system32\rasadhlp.dll	
polagent.dll	5.00.2183.1	108.27 KB (110,864 bytes)	12/7/1999 7:00:00 AM	winrnr.dll	5.00.2160.1	18.77 KB (19,216 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\polagent.dll		Microsoft Corporation		c:\winnt\system32\winrnr.dll	
scecli.dll	5.00.2195.2780	105.27 KB (107,792 bytes)	2/10/2003 5:30:12 PM	rnr20.dll	5.00.2195.2871	35.77 KB (36,624 bytes)	2/10/2003 5:30:11 PM
Microsoft Corporation		c:\winnt\system32\scecli.dll		Microsoft Corporation		c:\winnt\system32\rnr20.dll	
atl.dll	3.00.8449	57.56 KB (58,938 bytes)	12/7/1999 7:00:00 AM	wshtcpip.dll	5.00.2195.2104	17.27 KB (17,680 bytes)	2/10/2003 5:30:17 PM
Microsoft Corporation		c:\winnt\system32\atl.dll		Microsoft Corporation		c:\winnt\system32\wshtcpip.dll	
certcli.dll	5.00.2195.2778	130.77 KB (133,904 bytes)	2/10/2003 5:29:50 PM	msafd.dll	5.00.2195.2779	106.77 KB (109,328 bytes)	2/10/2003 5:29:59 PM
Microsoft Corporation		c:\winnt\system32\certcli.dll		Microsoft Corporation		c:\winnt\system32\msafd.dll	
esent.dll	6.0.3940.13	1.08 MB (1,135,376 bytes)	2/10/2003 5:29:54 PM	mswsock.dll	5.00.2195.2871	62.77 KB (64,272 bytes)	2/10/2003 5:30:05 PM
Microsoft Corporation		c:\winnt\system32\esent.dll		Microsoft Corporation		c:\winnt\system32\mswsock.dll	
ntdsatq.dll	5.00.2195.2878	31.27 KB (32,016 bytes)	2/10/2003 5:30:07 PM	msgsvc.dll	5.00.2195.2939	34.27 KB (35,088 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\ntdsatq.dll		Microsoft Corporation		c:\winnt\system32\msgsvc.dll	
ntdsa.dll	5.00.2195.2899	990.77 KB (1,014,544 bytes)	2/10/2003 5:30:07 PM	browser.dll	5.00.2195.2778	48.27 KB (49,424 bytes)	2/10/2003 5:29:48 PM
Microsoft Corporation		c:\winnt\system32\ntdsa.dll		Microsoft Corporation		c:\winnt\system32\browser.dll	
kdcsvc.dll	5.00.2195.2878	137.77 KB (141,072 bytes)	2/10/2003 5:29:58 PM	alrsvc.dll	5.00.2134.1	17.77 KB (18,192 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\kdcsvc.dll		Microsoft Corporation		c:\winnt\system32\alrsvc.dll	
sfmapi.dll	5.00.2134.1	38.77 KB (39,696 bytes)	12/7/1999 7:00:00 AM	trkwks.dll	5.00.2166.1	88.77 KB (90,896 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\sfmapi.dll		Microsoft Corporation		c:\winnt\system32\trkwks.dll	
rassfm.dll	5.00.2195.2671	21.27 KB (21,776 bytes)	2/10/2003 5:30:11 PM	seclogon.dll	5.00.2135.1	15.77 KB (16,144 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\rassfm.dll		Microsoft Corporation		c:\winnt\system32\seclogon.dll	
mpr.dll	5.00.2195.2779	53.27 KB (54,544 bytes)	2/10/2003 5:29:59 PM	psbase.dll	5.00.2195.2779	111.77 KB (114,448 bytes)	2/10/2003 5:30:10 PM
Microsoft Corporation		c:\winnt\system32\mpr.dll		Microsoft Corporation		c:\winnt\system32\psbase.dll	
rsabase.dll	5.00.2195.2228	128.27 KB (131,344 bytes)	5/4/2001 1:05:02 PM	cryptsvc.dll	5.00.2181.1	61.77 KB (63,248 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\rsabase.dll		Microsoft Corporation		c:\winnt\system32\cryptsvc.dll	
schannel.dll	5.00.2195.2922	138.27 KB (141,584 bytes)	5/4/2001 1:05:02 PM	cryptdll.dll	5.00.2135.1	41.27 KB (42,256 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\schannel.dll		Microsoft Corporation		c:\winnt\system32\cryptdll.dll	
netlogon.dll	5.00.2195.2865	357.77 KB (366,352 bytes)	2/10/2003 5:30:06 PM	wkssvc.dll	5.00.2195.2780	95.27 KB (97,552 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\netlogon.dll		Microsoft Corporation		c:\winnt\system32\wkssvc.dll	
kerberos.dll	5.00.2195.2913	198.77 KB (203,536 bytes)	2/10/2003 5:29:58 PM	srvsvc.dll	5.00.2195.2904	79.27 KB (81,168 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\kerberos.dll		Microsoft Corporation		c:\winnt\system32\srvsvc.dll	
msprivs.dll	5.00.2154.1	41.50 KB (42,496 bytes)	12/7/1999 7:00:00 AM	cfgmgr32.dll	5.00.2134.1	16.77 KB (17,168 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\msprivs.dll		Microsoft Corporation		c:\winnt\system32\cfgmgr32.dll	
samsrv.dll	5.00.2195.2918	369.77 KB (378,640 bytes)	12/7/1999 7:00:00 AM	dmserver.dll	2195.2778.297.3	11.77 KB (12,048 bytes)	2/10/2003 5:29:52 PM
Microsoft Corporation		c:\winnt\system32\samsrv.dll		VERITAS Software Corp.		c:\winnt\system32\dmserver.dll	
lsasrv.dll	5.00.2195.2964	492.77 KB (504,592 bytes)	12/7/1999 7:00:00 AM	winsta.dll	5.00.2195.2386	36.77 KB (37,648 bytes)	2/10/2003 5:30:17 PM
Microsoft Corporation		c:\winnt\system32\lsasrv.dll		Microsoft Corporation		c:\winnt\system32\winsta.dll	
lsass.exe	5.00.2195.2964	32.77 KB (33,552 bytes)	12/7/1999 7:00:00 AM	lmhsvc.dll	5.00.2195.2778	9.77 KB (10,000 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation		c:\winnt\system32\lsass.exe		Microsoft Corporation		c:\winnt\system32\lmhsvc.dll	

dnrsrivr.dll	5.00.2195.2778	88.77 KB (90,896 bytes)		csd.dll	5.00.2195.2401	98.27 KB (100,624 bytes)	2/10/2003
2/10/2003 5:29:53 PM	Microsoft Corporation			5:29:51 PM	Microsoft Corporation		
c:\winnt\system32\dnrsrivr.dll				c:\winnt\system32\csd.dll			
tapi32.dll	5.00.2182.1	123.27 KB (126,224 bytes)	12/7/1999	lz32.dll	5.00.2134.1	9.77 KB (10,000 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\tapi32.dll				c:\winnt\system32\lz32.dll			
rasman.dll	5.00.2195.2780	54.77 KB (56,080 bytes)	12/7/1999	version.dll	5.00.2134.1	15.77 KB (16,144 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\rasman.dll				c:\winnt\system32\version.dll			
rasapi32.dll	5.00.2195.2671	189.77 KB (194,320 bytes)		rsaenh.dll	5.00.2195.2228	130.77 KB (133,904 bytes)	2/10/2003
12/7/1999 7:00:00 AM	Microsoft Corporation			5:31:00 PM	Microsoft Corporation		
c:\winnt\system32\rasapi32.dll				c:\winnt\system32\rsaenh.dll			
rtutils.dll	5.00.2168.1	43.77 KB (44,816 bytes)	12/7/1999	mecat32.dll	5.131.2134.1	7.77 KB (7,952 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\rtutils.dll				c:\winnt\system32\mecat32.dll			
adslrpc.dll	5.00.2195.2842	127.27 KB (130,320 bytes)	2/10/2003	ole32.dll	5.00.2195.2887	969.77 KB (993,040 bytes)	2/10/2003
5:29:47 PM	Microsoft Corporation			5:30:09 PM	Microsoft Corporation		
c:\winnt\system32\adslrpc.dll				c:\winnt\system32\ole32.dll			
activeds.dll	5.00.2195.2778	174.77 KB (178,960 bytes)		imagehlp.dll	5.00.2195.2778	125.77 KB (128,784 bytes)	
2/10/2003 5:29:41 PM	Microsoft Corporation			5/4/2001 1:05:02 PM	Microsoft Corporation		
c:\winnt\system32\activeds.dll				c:\winnt\system32\imagehlp.dll			
mprapi.dll	5.00.2181.1	79.27 KB (81,168 bytes)	12/7/1999	msasn1.dll	5.00.2134.1	51.27 KB (52,496 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\mprapi.dll				c:\winnt\system32\msasn1.dll			
iphlpapi.dll	5.00.2173.2	67.77 KB (69,392 bytes)		crypt32.dll	5.131.2195.2833	451.27 KB (462,096 bytes)	2/10/2003
12/7/1999 7:00:00 AM	Microsoft Corporation			5:29:51 PM	Microsoft Corporation		
c:\winnt\system32\iphlpapi.dll				c:\winnt\system32\crypt32.dll			
icmp.dll	5.00.2134.1	7.27 KB (7,440 bytes)	12/7/1999 7:00:00 AM	wintrust.dll	5.131.2195.2779	162.27 KB (166,160 bytes)	
Microsoft Corporation				2/10/2003 5:30:17 PM	Microsoft Corporation		
c:\winnt\system32\icmp.dll				c:\winnt\system32\wintrust.dll			
dhcpcsvc.dll	5.00.2195.2778	88.77 KB (90,896 bytes)		setupapi.dll	5.00.2195.2663	555.77 KB (569,104 bytes)	
12/7/1999 7:00:00 AM	Microsoft Corporation			12/7/1999 7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\dhcpcsvc.dll				c:\winnt\system32\setupapi.dll			
eventlog.dll	5.00.2178.1	43.77 KB (44,816 bytes)		winmm.dll	5.00.2161.1	184.77 KB (189,200 bytes)	12/7/1999
12/7/1999 7:00:00 AM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\eventlog.dll				c:\winnt\system32\winmm.dll			
ntdsapi.dll	5.00.2195.2661	55.77 KB (57,104 bytes)	2/10/2003	comctl32.dll	5.81	537.77 KB (550,672 bytes)	12/7/1999
5:30:07 PM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\ntdsapi.dll				c:\winnt\system32\comctl32.dll			
scesrv.dll	5.00.2195.2780	226.27 KB (231,696 bytes)	2/10/2003	shlwapi.dll	5.00.3315.1000	282.77 KB (289,552 bytes)	2/10/2003
5:30:12 PM	Microsoft Corporation			5:30:13 PM	Microsoft Corporation		
c:\winnt\system32\scesrv.dll				c:\winnt\system32\shlwapi.dll			
umpnprmgr.dll	5.00.2182.1	86.27 KB (88,336 bytes)		shell32.dll	5.00.3315.2902	2.25 MB (2,359,056 bytes)	2/10/2003
12/7/1999 7:00:00 AM	Microsoft Corporation			5:30:13 PM	Microsoft Corporation		
c:\winnt\system32\umpnprmgr.dll				c:\winnt\system32\shell32.dll			
services.exe	5.00.2195.2780	86.77 KB (88,848 bytes)		msgina.dll	5.00.2195.2779	324.27 KB (332,048 bytes)	12/7/1999
12/7/1999 7:00:00 AM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\services.exe				c:\winnt\system32\msgina.dll			
msv1_0.dll	5.00.2195.2900	111.77 KB (114,448 bytes)	12/7/1999	wsock32.dll	5.00.2195.2871	21.27 KB (21,776 bytes)	
7:00:00 AM	Microsoft Corporation			2/10/2003 5:30:17 PM	Microsoft Corporation		
c:\winnt\system32\msv1_0.dll				c:\winnt\system32\wsock32.dll			
clbcatq.dll	2000.2.3471.1	496.77 KB (508,688 bytes)	2/10/2003	dnsapi.dll	5.00.2195.2785	130.77 KB (133,904 bytes)	2/10/2003
5:29:50 PM	Microsoft Corporation			5:29:53 PM	Microsoft Corporation		
c:\winnt\system32\clbcatq.dll				c:\winnt\system32\dnsapi.dll			
oleaut32.dll	2.40.4517	612.27 KB (626,960 bytes)	12/7/1999	wldap32.dll	5.00.2195.2797	125.27 KB (128,272 bytes)	
7:00:00 AM	Microsoft Corporation			2/10/2003 5:30:17 PM	Microsoft Corporation		
c:\winnt\system32\oleaut32.dll				c:\winnt\system32\wldap32.dll			
csui.dll	5.00.2195.2959	228.27 KB (233,744 bytes)	2/10/2003	ws2help.dll	5.00.2134.1	17.77 KB (18,192 bytes)	
5:29:51 PM	Microsoft Corporation			12/7/1999 7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\csui.dll				c:\winnt\system32\ws2help.dll			
winspool.drv	5.00.2195.2780	109.77 KB (112,400 bytes)		ws2_32.dll	5.00.2195.2780	67.77 KB (69,392 bytes)	2/10/2003
12/7/1999 7:00:00 AM	Microsoft Corporation			5:30:17 PM	Microsoft Corporation		
c:\winnt\system32\winspool.drv				c:\winnt\system32\ws2_32.dll			
winscard.dll	5.00.2134.1	77.27 KB (79,120 bytes)		samlib.dll	5.00.2195.2780	49.77 KB (50,960 bytes)	12/7/1999
12/7/1999 7:00:00 AM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\winscard.dll				c:\winnt\system32\samlib.dll			
wlnotify.dll	5.00.2195.2780	53.77 KB (55,056 bytes)					
2/10/2003 5:30:17 PM	Microsoft Corporation						
c:\winnt\system32\wlnotify.dll							

```

netrap.dll 5.00.2134.1 11.27 KB (11,536 bytes) 12/7/1999
7:00:00 AM Microsoft Corporation
c:\winnt\system32\netrap.dll
netapi32.dll 5.00.2195.2808 303.77 KB (311,056 bytes)
2/10/2003 5:30:06 PM Microsoft Corporation
c:\winnt\system32\netapi32.dll
profmap.dll 5.00.2181.1 29.27 KB (29,968 bytes)
12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\profmap.dll
secur32.dll 5.00.2195.2862 46.77 KB (47,888 bytes) 2/10/2003
5:30:12 PM Microsoft Corporation
c:\winnt\system32\secur32.dll
sfc.dll 5.00.2195.2896 92.11 KB (94,320 bytes) 2/10/2003
5:30:12 PM Microsoft Corporation
c:\winnt\system32\sfc.dll
nddeapi.dll 5.00.2137.1 15.27 KB (15,632 bytes) 12/7/1999
7:00:00 AM Microsoft Corporation
c:\winnt\system32\nddeapi.dll
userenv.dll 5.00.2195.2780 361.77 KB (370,448 bytes) 12/7/1999
7:00:00 AM Microsoft Corporation
c:\winnt\system32\userenv.dll
user32.dll 5.00.2195.2821 392.77 KB (402,192 bytes) 12/7/1999
7:00:00 AM Microsoft Corporation
c:\winnt\system32\user32.dll
gdi32.dll 5.00.2195.2778 228.77 KB (234,256 bytes) 12/7/1999
7:00:00 AM Microsoft Corporation
c:\winnt\system32\gdi32.dll
rpert4.dll 5.00.2195.2832 437.27 KB (447,760 bytes) 2/10/2003
5:30:11 PM Microsoft Corporation
c:\winnt\system32\rpert4.dll
advapi32.dll 5.00.2195.2867 351.77 KB (360,208 bytes)
12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\advapi32.dll
kernel32.dll 5.00.2195.2778 714.77 KB (731,920 bytes)
12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\kernel32.dll
msvcrt.dll 6.10.8924.0 284.05 KB (290,869 bytes) 5/4/2001
1:05:02 PM Microsoft Corporation
c:\winnt\system32\msvcrt.dll
winlogon.exe 5.00.2195.2953 173.77 KB (177,936 bytes)
12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\winlogon.exe
sfefiles.dll 5.00.2195.2967 948.27 KB (971,024 bytes) 2/10/2003
5:30:12 PM Microsoft Corporation
c:\winnt\system32\sfefiles.dll
ntdll.dll 5.00.2195.2779 478.77 KB (490,256 bytes) 5/4/2001
1:05:02 PM Microsoft Corporation
c:\winnt\system32\ntdll.dll
smss.exe 5.00.2195.2901 44.27 KB (45,328 bytes) 12/7/1999
7:00:00 AM Microsoft Corporation
c:\winnt\system32\smss.exe

```

[Services]

Display Name	Name	State	Start Mode	Service Type
Path	Error Control	Start Name	Tag ID	
Alerter	Alerter	Running	Auto	Share Process
c:\winnt\system32\services.exe		Normal	LocalSystem	0
Application Management	AppMgmt	Stopped	Manual	Share
Process	c:\winnt\system32\services.exe		Normal	LocalSystem
Computer Browser	Browser	Running	Auto	Share Process
c:\winnt\system32\services.exe		Normal	LocalSystem	0
Indexing Service	cisvc	Stopped	Manual	Share Process
c:\winnt\system32\cisvc.exe		Normal	LocalSystem	0
ClipBook	ClipSrv	Stopped	Manual	Own Process
c:\winnt\system32\clipsrv.exe		Normal	LocalSystem	0
Distributed File System	Dfs	Running	Auto	Own
Process	c:\winnt\system32\dfssvc.exe		Normal	LocalSystem

```

DHCP Client Dhcp Running Auto Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
Logical Disk Manager Administrative Service dmadmin Stopped
Manual Share Process c:\winnt\system32\dmadmin.exe /com
Normal LocalSystem 0
Logical Disk Managerdmsrvr Running Auto Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
DNS Client Dnscache Running Auto Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
COM+ Event System EventSystem Running Manual Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Fax Service Fax Stopped Manual Own Process
c:\winnt\system32\faxsvc.exe Normal LocalSystem 0
Internet Authentication Service IAS Running Auto Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
IIS Admin Service IISADMIN Stopped Auto Share
Process c:\winnt\system32\inetrv\inetinfo.exe Normal
LocalSystem 0
InterSite Messaging IsmServ Stopped Disabled Own Process
c:\winnt\system32\ismserv.exe Normal LocalSystem 0
Kerberos Key Distribution Center kdc Stopped Disabled
Share Process c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
Workstation lanmanworkstation Running Auto Share
Process c:\winnt\system32\services.exe Normal LocalSystem 0
License Logging Service LicenseService Running Auto
Own Process c:\winnt\system32\llssrv.exe Normal
LocalSystem 0
TCP/IP NetBIOS Helper Service LmHosts Running Auto Share
Process c:\winnt\system32\services.exe Normal LocalSystem 0
Messenger Messenger Running Auto Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvc Stopped Manual
Own Process c:\winnt\system32\mnmsrvc.exe Normal
LocalSystem 0
Distributed Transaction Coordinator MSDTC Running Auto
Own Process c:\winnt\system32\msdtc.exe Normal
LocalSystem 0
Windows Installer MSIServer Stopped Manual Share Process
c:\winnt\system32\msiexec.exe /v Normal LocalSystem 0
Network DDE NetDDE Stopped Manual Share Process
c:\winnt\system32\netdde.exe Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped Manual Share
Process c:\winnt\system32\netdde.exe Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\winnt\system32\lsass.exe Normal LocalSystem 0
Network Connections Netman Running Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own Process
c:\winnt\system32\ntfrs.exe Ignore LocalSystem 0
NT LM Security Support Provider NtLmSsp Stopped Manual
Share Process c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Running Auto Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem 0
Plug and Play PlugPlay Running Auto Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
IPSEC Policy Agent PolicyAgent Running Auto Share
Process c:\winnt\system32\lsass.exe Normal LocalSystem 0
Protected Storage ProtectedStorage Running Auto Share
Process c:\winnt\system32\services.exe Normal LocalSystem 0

```



Remote Access Connection Manager	RasAuto	Stopped	Manual
Share Process	c:\winnt\system32\svchost.exe -k netsvcs	Normal	
LocalSystem	0		
Remote Access Connection Manager	RasMan	Stopped	Manual
Share Process	c:\winnt\system32\svchost.exe -k netsvcs	Normal	
LocalSystem	0		
Routing and Remote Access	RemoteAccess	Stopped	Disabled
Share Process	c:\winnt\system32\svchost.exe -k netsvcs	Normal	
LocalSystem	0		
Remote Registry Service	RemoteRegistry	Running	Auto
Own Process	c:\winnt\system32\regsvc.exe	Normal	
LocalSystem	0		
Remote Procedure Call (RPC) Locator	RpcLocator	Stopped	Manual
Own Process	c:\winnt\system32\locator.exe	Normal	
LocalSystem	0		
Remote Procedure Call (RPC)	RpcSs	Running	Auto
Process	c:\winnt\system32\svchost -k rpsvc	Normal	Share
LocalSystem	0		
QoS Admission Control (RSVP)	RSVP	Running	Auto
Process	c:\winnt\system32\rsrv.exe -s	Normal	LocalSystem
Security Accounts Manager	SamSs	Running	Auto
Process	c:\winnt\system32\lsass.exe	Normal	LocalSystem
Smart Card Helper	SCardDrv	Stopped	Manual
Share Process	c:\winnt\system32\scardsvr.exe	Ignore	LocalSystem
LocalSystem	0		
Smart Card	SCardSvr	Stopped	Manual
Share Process	c:\winnt\system32\scardsvr.exe	Ignore	LocalSystem
LocalSystem	0		
Task Scheduler	Schedule	Running	Auto
Share Process	c:\winnt\system32\mtask.exe	Normal	LocalSystem
LocalSystem	0		
RunAs Service	seclogon	Running	Auto
Share Process	c:\winnt\system32\services.exe	Ignore	LocalSystem
LocalSystem	0		
System Event Notification	SENS	Running	Auto
Share Process	c:\winnt\system32\svchost.exe -k netsvcs	Normal	LocalSystem
LocalSystem	0		
Internet Connection Sharing	SharedAccess	Stopped	Manual
Share Process	c:\winnt\system32\svchost.exe -k netsvcs	Normal	
LocalSystem	0		
Simple TCP/IP Services	SimpTcp	Running	Auto
Share Process	c:\winnt\system32\tcpvcs.exe	Normal	LocalSystem
LocalSystem	0		
Print Spooler	Spooler	Running	Auto
Own Process	c:\winnt\system32\spoolsv.exe	Normal	LocalSystem
LocalSystem	0		
Performance Logs and Alerts	SysmonLog	Stopped	Manual
Own Process	c:\winnt\system32\smlogsvc.exe	Normal	LocalSystem
LocalSystem	0		
Telephony TapiSrv	Running	Manual	Share Process
Process	c:\winnt\system32\svchost.exe -k tapisrv	Normal	LocalSystem
LocalSystem	0		
Terminal Services	TermService	Stopped	Disabled
Own Process	c:\winnt\system32\termsrv.exe	Normal	LocalSystem
LocalSystem	0		
Telnet	TlntSvr	Stopped	Manual
Own Process	c:\winnt\system32\tlntsvr.exe	Normal	LocalSystem
LocalSystem	0		
Distributed Link Tracking Server	TrkSvr	Stopped	Manual
Share Process	c:\winnt\system32\services.exe	Normal	LocalSystem
LocalSystem	0		
Distributed Link Tracking Client	TrkWks	Running	Auto
Share Process	c:\winnt\system32\services.exe	Normal	LocalSystem
LocalSystem	0		
Uninterruptible Power Supply	UPS	Stopped	Manual
Own Process	c:\winnt\system32\ups.exe	Normal	LocalSystem
LocalSystem	0		
Utility Manager	UtilMan	Stopped	Manual
Own Process	c:\winnt\system32\utilman.exe	Normal	LocalSystem
LocalSystem	0		
Windows Time	W32Time	Stopped	Manual
Share Process	c:\winnt\system32\services.exe	Normal	LocalSystem
LocalSystem	0		
World Wide Web Publishing Service	W3SVC	Stopped	Auto
Share Process	c:\winnt\system32\inetrv\inetinfo.exe	Normal	LocalSystem
LocalSystem	0		
Windows Management Instrumentation	WinMgmt	Running	Auto
Own Process	c:\winnt\system32\wbem\winmgmt.exe	Ignore	LocalSystem
LocalSystem	0		
Windows Management Instrumentation Driver Extensions	Wmi	Running	Manual
Share Process	c:\winnt\system32\services.exe	Normal	LocalSystem
LocalSystem	0		

[Program Groups]

Group Name	Name	User Name	Default User
Accessories	Default User:Accessories		Default User
Accessories\Accessibility		Default User:Accessories\Accessibility	Default User
Accessories\Entertainment		Default User:Accessories\Entertainment	Default User
Accessories\System Tools		Default User:Accessories\System Tools	Default User
Startup	Default User:Startup		Default User
Accessories	All Users:Accessories		All Users
Accessories\Accessibility		All Users:Accessories\Accessibility	All Users
Accessories\Communications		All Users:Accessories\Communications	All Users
Accessories\Entertainment		All Users:Accessories\Entertainment	All Users
Accessories\Games		All Users:Accessories\Games	All Users
Accessories\Microsoft Script Debugger		All Users:Accessories\Microsoft	All Users
Accessories\System Tools		All Users:Accessories\System Tools	All Users
Administrative Tools	All Users:Administrative Tools		All Users
Microsoft SQL Server	All Users:Microsoft SQL Server		All Users
Startup	All Users:Startup		All Users
Accessories	CLIENT10\Administrator:Accessories		CLIENT10\Administrator
Accessories\Accessibility		CLIENT10\Administrator:Accessories\Accessibility	CLIENT10\Administrator
Accessories\Entertainment		CLIENT10\Administrator:Accessories\Entertainment	CLIENT10\Administrator
Accessories\System Tools		CLIENT10\Administrator:Accessories\System	CLIENT10\Administrator
Tools	CLIENT10\Administrator		CLIENT10\Administrator:Administrative Tools
Administrative Tools	CLIENT10\Administrator:Administrative Tools		CLIENT10\Administrator
Startup	CLIENT10\Administrator:Startup		CLIENT10\Administrator

[Startup Programs]

Program	Command	User Name	Location
No startup program information			

[OLE Registration]

Object	Local Server
Sound (OLE2)	sndrec32.exe
Media Clip	mplay32.exe
Video Clip	mplay32.exe /avi
MIDI Sequence	mplay32.exe /midi
Sound	Not Available
Media Clip	Not Available
Image Document	"C:\Program Files\Windows NT\Accessories\ImageVue\KodakImg.exe"
WordPad Document	"%ProgramFiles%\Windows NT\Accessories\WORDPAD.EXE"
Windows Media Services DRM Storage object	Not Available
Bitmap Image	mspaint.exe

[Internet Explorer 5]

[ Following are sub-categories of this main category ]

[Summary]

Item Value  
 Version 5.00.3315.1000  
 Build 53315.1000  
 Product ID 51876-270-8956491-05798  
 Application Path C:\Program Files\Internet Explorer  
 Language English (United States)  
 Active Printer Not Available

Cipher Strength 168-bit  
 Content Advisor Disabled  
 IEAK Install No

[File Versions]

File	Version	Size	Date	Path	Company
advapi32.dll	5.0.2195.2867	352 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
advpack.dll	5.0.3103.1000	87 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
browseui.dll	5.0.3315.2846	35 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
ckenv.exe	5.0.2189.1	9 KB	12/7/1999 7:00:00 AM	C:\WINNT\system32	Microsoft Corporation
comctl32.dll	5.81.3103.1000	538 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
crypt32.dll	5.131.2195.2833	451 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
enhsg.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iemigrat.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iesetup.dll	5.0.3103.1000	57 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
iexplore.exe	5.0.2920.0	59 KB	12/7/1999 7:00:00 AM	C:\Program Files\Internet Explorer	Microsoft Corporation
imagehlp.dll	5.0.2195.2778	126 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
imghelp.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
inseng.dll	5.0.3103.1000	72 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
jobexec.dll	5.0.0.1	47 KB	12/7/1999 7:00:00 AM	C:\WINNT\system32	Microsoft Corporation
jscrip.dll	5.1.0.5907	476 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
jsproxy.dll	5.0.2920.0	13 KB	12/7/1999 7:00:00 AM	C:\WINNT\system32	Microsoft Corporation
msaahtml.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
mshhtml.dll	5.0.3315.2870	2290 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
msjava.dll	5.0.3802.0	923 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
msoss.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
msxml.dll	8.0.5718.1	493 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
occache.dll	5.0.3103.1000	86 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
ole32.dll	5.0.2195.2887	970 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
oleaut32.dll	2.40.4517.0	612 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
olepro32.dll	5.0.4517.0	160 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation

rsabase.dll	5.0.2195.2228	128 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
rsaenh.dll	5.0.2195.2228	131 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
rsapi32.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
rsasig.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
schannel.dll	5.1.2195.0	138 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
shdoc401.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
shdocvw.dll	5.0.3315.2879	1078 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
shell32.dll	5.0.3315.2902	2304 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
shlwapi.dll	5.0.3315.1000	283 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
url.dll	5.0.2920.0	82 KB	12/7/1999 7:00:00 AM	C:\WINNT\system32	Microsoft Corporation
urlmon.dll	5.0.3315.1000	441 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
vbscript.dll	5.1.0.5907	428 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
webcheck.dll	5.0.3315.1000	252 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
win.com	5.0.2134.1	24 KB	12/7/1999 7:00:00 AM	C:\WINNT\system32	Microsoft Corporation
wininet.dll	5.0.3315.1000	457 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
winsock.dll	3.10.0.103	3 KB	12/7/1999 7:00:00 AM	C:\WINNT\system32	Microsoft Corporation
wintrust.dll	5.131.2195.2779	162 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
wsock.vxd	<File Missing>	Not Available	Not Available	Not Available	Not Available
wsock32.dll	5.0.2195.2871	21 KB	5/4/2001 12:05:02 PM	C:\WINNT\system32	Microsoft Corporation
wsock32n.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available

[Connectivity]

Item	Value
Connection Preference	Never dial
EnableHttp1.1	1
ProxyHttp1.1	0

LAN Settings

AutoConfigProxy	wininet.dll
AutoProxyDetectMode	Enabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

[ Following are sub-categories of this main category ]

[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\Administrator\Local Settings\Temporary Internet Files
Total Disk Space	17351 MB

Available Disk Space 14248 MB  
Maximum Cache Size 542 MB  
Available Cache Size 542 MB

[List of Objects]

Program File	Status	CodeBase
No cached object information available		

[Content]

[ Following are sub-categories of this main category ]

[Summary]

Item	Value
Content Advisor	Disabled

[Personal Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
Administrator	Administrator	2/10/2003 to 1/17/2103	sha1RSA	

[Other People Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
No other people certificate information available				

[Publishers]

Name
No publisher information available

[Security]

Zone	Security Level
Local intranet	Medium-low
Trusted sites	Low
Internet	Medium
Restricted sites	High

## Client Configuration Parameters

Client Configuration Parameters

COM+ Settings

TPCC.AllTxns:

Activation:

- Enable Object Pooling selected
- Minimum Pool Size: 190
- Maximum Pool Size: 190
- Creating Timeout: 60,000
- Enable Object Construction
- Enable Just in Time Activation

Concurrency:

- Concurrency Required

TPCC Application Registry Parameters

[HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\TPCC]

"Path"="c:\inetpub\wwwroot\  
"NumberOfDeliveryThreads"=dword:0x16  
"MaxConnections"=dword:0x55f0  
"MaxPendingDeliveries"=dword:0x898  
"DB\_Protocol"="ODBC"

"TxnMonitor"="COM"  
"DbServer"="ibmsrvr3"  
"DbName"="tpcc"  
"DbUser"="sa"  
"DbPassword"=""  
"COM\_SinglePool"="YES"

Microsoft Internet Information Service Registry Parameters

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo]

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters]

"ListenBackLog"=dword:0x19  
"DispatchEntries"=hex(7):4c,00,44,00,41,00,50,00,53,00,56,00,43,00,00,00,00,00  
"PoolThreadLimit"=dword:0xbe  
"ThreadTimeout"=dword:0x15180

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Performance]

"Library"="infectrs.dll"  
"Open"="OpenINFOPerformanceData"  
"Close"="CloseINFOPerformanceData"  
"Collect"="CollectINFOPerformanceData"  
"Last Counter"=dword:0x842  
"Last Help"=dword:0x843  
"First Counter"=dword:0x802

World Wide Web Service Registry Parameters

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC]

"Type"=dword:0x20  
"Start"=dword:0x2  
"ErrorControl"=dword:0x1  
"ImagePath"=hex(2):43,00,3a,00,5c,00,57,00,49,00,4e,00,4e,00,54,00,5c,00,53,00,79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,69,00,6e,00,65,00,74,00,73,00,72,00,76,00,5c,00,69,00,6e,00,65,00,74,00,69,00,6e,00,66,00,6f,00,2e,00,65,00,78,00,65,00,00,00  
"DisplayName"="World Wide Web Publishing Service"  
"DependOnService"=hex(7):49,00,49,00,53,00,41,00,44,00,4d,00,49,00,4e,00,00,00,00,00  
"DependOnGroup"=hex(7):00,00  
"ObjectName"="LocalSystem"  
"Description"="Provides Web connectivity and administration through the Internet Information Services snap-in."

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP]

"NOTE"="This is for backward compatibility only."

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP\Parameters]

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters]

"MajorVersion"=dword:00000005  
"MinorVersion"=dword:00000000  
"InstallPath"="C:\WINNT\System32\inetsrv"  
"CertMapList"="C:\WINNT\System32\inetsrv\iisrmap.dll"  
"AccessDeniedMessage"="Error: Access is Denied."  
"Filter DLLs"=""  
"LogFileDirectory"="C:\WINNT\System32\LogFiles"  
"AcceptExOutstanding"=dword:00000028

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch]

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory]

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory]

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Script Map]

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Virtual Roots]

"/"="c:\inetpub\wwwroot,,205"  
"/Scripts"="c:\inetpub\scripts,,1"  
"/IISAdmin"="C:\WINNT\System32\inetsrv\iisadmin,,1"  
"/IISSamples"="c:\inetpub\iissamples,,1"  
"/MSADC"="c:\program files\common files\system\msadc,,1"  
"/IISHelp"="c:\winnt\help\iishelp,,1"  
"/\_vti\_bin"="C:\Program Files\Common Files\Microsoft Shared\Web Server Extensions\40\isapi,,1"  
"/Rpc"="C:\WINNT\System32\RpcProxy,,1"  
"/Printers"="C:\WINNT\web\printers,,201"

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance]

"Library"="w3ctrs.dll"  
"Open"="OpenW3PerformanceData"  
"Close"="CloseW3PerformanceData"  
"Collect"="CollectW3PerformanceData"  
"Last Counter"=dword:000008f2  
"Last Help"=dword:000008f3  
"First Counter"=dword:00000850  
"First Help"=dword:00000851

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security]

"Security"=hex:01,00,14,80,a0,00,00,00,ac,00,00,00,14,00,00,00,30,00,00,00,02,\  
00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00,00,00,00,01,00,00,\  
00,00,02,00,70,00,04,00,00,00,00,00,18,00,fd,01,02,00,01,01,00,00,00,00,\  
05,12,00,00,00,74,00,6f,00,00,00,1c,00,ff,01,0f,00,01,02,00,00,00,00,05,\  
20,00,00,00,20,02,00,00,72,00,73,00,00,00,18,00,8d,01,02,00,01,01,00,00,\  
00,00,05,0b,00,00,00,20,02,00,00,00,1c,00,fd,01,02,00,01,02,00,00,00,\  
00,05,20,00,00,00,23,02,00,00,72,00,73,00,01,01,00,00,00,00,05,12,00,00,\  
00,01,01,00,00,00,00,05,12,00,00,00

[HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Enum]

"0"="Root\LEGACY\_W3SVC\0000"  
"Count"=dword:00000001  
"NextInstance"=dword:00000001

## RTE Input Parameters

Profile: 4224wh\_32rte  
File Path: C:\Program Files\BenchCraft\4224wh\_32rte.pro  
Version: 3

Number of Engines: 32

Name: rte111  
Description: rte111  
Directory: c:\rtelogs\rte111.log  
Machine: rtes2

Parameter Set: PARAM2  
Index: 0  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER11571562  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte112  
Description: rte112  
Directory: c:\rtelogs\rte112.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 3000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER25384421  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte113  
Description: rte113  
Directory: c:\rtelogs\rte113.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 6000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER35434750  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 2

Name: rte114  
Description: rte114  
Directory: c:\rtelogs\rte114.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 9000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER45470859  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 3

Name: rte121  
Description: rte121  
Directory: c:\rtelogs\rte121.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 15000000  
Seed: 25744  
Configured Users: 1320

Pipe Name: DRIVER55546265  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte122  
Description: rte122  
Directory: c:\rtelogs\rte122.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 18000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER65583640  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte123  
Description: rte123  
Directory: c:\rtelogs\rte123.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 21000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER75623609  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 2

Name: rte124  
Description: rte124  
Directory: c:\rtelogs\rte124.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 24000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER85670968  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 3

Name: rte132  
Description: rte132  
Directory: c:\rtelogs\rte132.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 27000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER95713843  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1

Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte133  
Description: rte133  
Directory: c:\rtelogs\rte133.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 30000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER105754984  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte134  
Description: rte134  
Directory: c:\rtelogs\rte134.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 33000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER115821125  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte211  
Description: rte211  
Directory: c:\rtelogs\rte211.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 36000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER125893515  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte212  
Description: rte212  
Directory: c:\rtelogs\rte212.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 39000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER135953109  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte213  
Description: rte213  
Directory: c:\rtelogs\rte213.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 42000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER145993203  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 2

Name: rte214  
Description: rte214  
Directory: c:\rtelogs\rte214.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 45000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER156057359  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 3

Name: rte221  
Description: rte221  
Directory: c:\rtelogs\rte221.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 48000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER166118968  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte222  
Description: rte222  
Directory: c:\rtelogs\rte222.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 51000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER176154750  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte223  
Description: rte223  
Directory: c:\rtelogs\rte223.log  
Machine: rtes2

Parameter Set: PARAM2  
Index: 54000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER186184031  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 2

Name: rte224  
Description: rte224  
Directory: c:\rtelogs\rte224.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 57000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER196216140  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 3

Name: rte232  
Description: rte232  
Directory: c:\rtelogs\rte232.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 60000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER206319515  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte233  
Description: rte233  
Directory: c:\rtelogs\rte233.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 63000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER216374171  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte234  
Description: rte234  
Directory: c:\rtelogs\rte234.log  
Machine: rtes2  
Parameter Set: PARAM2  
Index: 66000000  
Seed: 25744  
Configured Users: 1320

Pipe Name: DRIVER226408734  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 2

Name: rte135  
Description: rte135  
Directory: c:\rtelogs\rte135.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 72000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER2568868468  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte141  
Description: rte141  
Directory: c:\rtelogs\rte141.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 75000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER2668925937  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte142  
Description: rte142  
Directory: c:\rtelogs\rte142.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 78000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER2768987671  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte143  
Description: rte143  
Directory: c:\rtelogs\rte143.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 81000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER2869074843  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1

Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte144  
Description: rte144  
Directory: c:\rtelogs\rte144.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 84000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER2969145625  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte231  
Description: rte231  
Directory: c:\rtelogs\rte231.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 90000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER3169273125  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte241  
Description: rte241  
Directory: c:\rtelogs\rte241.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 96000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER3369433515  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte242  
Description: rte242  
Directory: c:\rtelogs\rte242.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 99000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER3469509140  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Name: rte243  
Description: rte243  
Directory: c:\rtelogs\rte243.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 102000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER3569556140  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 0

Name: rte244  
Description: rte244  
Directory: c:\rtelogs\rte244.log  
Machine: frte90  
Parameter Set: PARAM2  
Index: 105000000  
Seed: 25744  
Configured Users: 1320  
Pipe Name: DRIVER3669595937  
Connect Rate: 300  
Start Rate: 0  
Max. Concurrency: -1  
Concurrency Rate: 10  
CLIENT\_NURAND: 233  
CPU: 1

Number of User groups: 32

Driver Engine: rte111  
IIS Server: client11  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1 - 132  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte112  
IIS Server: client11  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 133 - 264  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte113  
IIS Server: client11  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML

w\_id Range: 265 - 396  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte114  
IIS Server: client11  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 397 - 528  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte121  
IIS Server: client12  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 529 - 660  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte122  
IIS Server: client12  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 661 - 792  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte123  
IIS Server: client12  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 793 - 924  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte124  
IIS Server: client12  
SQL Server: ibmserver3  
Database: tpcc



User: sa  
Protocol: HTML  
w\_id Range: 925 - 1056  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte132  
IIS Server: client13  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1057 - 1188  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte133  
IIS Server: client13  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1189 - 1320  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte134  
IIS Server: client13  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1321 - 1452  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte135  
IIS Server: client13  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1453 - 1584  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte141  
IIS Server: client14

SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1585 - 1716  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte142  
IIS Server: client14  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1717 - 1848  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte143  
IIS Server: client14  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1849 - 1980  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte144  
IIS Server: client14  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 1981 - 2112  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte211  
IIS Server: client21  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 2113 - 2244  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte212  
IIS Server: client21  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 2245 - 2376  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte213  
IIS Server: client21  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 2377 - 2508  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte214  
IIS Server: client21  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 2509 - 2640  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte221  
IIS Server: client22  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 2641 - 2772  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte222  
IIS Server: client22  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 2773 - 2904  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1

Scale Down: No

Driver Engine: rte223  
IIS Server: client22  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 2905 - 3036  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte224  
IIS Server: client22  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 3037 - 3168  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte231  
IIS Server: client23  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 3169 - 3300  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte232  
IIS Server: client23  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 3301 - 3432  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal  
User Count: 1320  
District id: 1  
Scale Down: No

Driver Engine: rte233  
IIS Server: client23  
SQL Server: ibmserver3  
Database: tpcc  
User: sa  
Protocol: HTML  
w\_id Range: 3433 - 3564  
w\_id Min Warehouse: 1  
w\_id Max Warehouse: 4224  
Scale: Normal

User Count: 1320  
 District id: 1  
 Scale Down: No

Driver Engine: rte234  
 IIS Server: client23  
 SQL Server: ibmserver3  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 3565 - 3696  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 4224  
 Scale: Normal  
 User Count: 1320  
 District id: 1  
 Scale Down: No

Driver Engine: rte241  
 IIS Server: client24  
 SQL Server: ibmserver3  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 3697 - 3828  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 4224  
 Scale: Normal  
 User Count: 1320  
 District id: 1  
 Scale Down: No

Driver Engine: rte242  
 IIS Server: client24  
 SQL Server: ibmserver3  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 3829 - 3960  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 4224  
 Scale: Normal  
 User Count: 1320  
 District id: 1  
 Scale Down: No

Driver Engine: rte243  
 IIS Server: client24  
 SQL Server: ibmserver3  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 3961 - 4092  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 4224  
 Scale: Normal  
 User Count: 1320  
 District id: 1  
 Scale Down: No

Driver Engine: rte244  
 IIS Server: client24  
 SQL Server: ibmserver3  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 4093 - 4224  
 w\_id Min Warehouse: 1

w\_id Max Warehouse: 4224  
 Scale: Normal  
 User Count: 1320  
 District id: 1  
 Scale Down: No

Number of Parameter Sets: 2

~Default

Default Parameter Set

	Txn Weight	Think Time	Key Time	RT Delay	RT Fence	Menu Delay
New Order	10.00	12.05	18.01	0.10		
Payment	10.00	12.05	3.01	0.10		
Delivery	1.00	5.05	2.01	0.10		
Stock Level	1.00	5.05	2.01	0.10		
Order Status	1.00	10.05	2.01	0.10		

PARAM2

Performance parameters

	Txn Weight	Think Time	Key Time	RT Delay	RT Fence	Menu Delay
New Order	10.00	12.05	18.01	0.10		
Payment	9.61	12.05	3.01	0.10		
Delivery	0.90	5.05	2.01	0.10		
Stock Level	0.90	5.05	2.01	0.10		
Order Status	0.90	10.05	2.01	0.10		

5.00 0.10  
 5.00 0.10  
 5.00 0.10  
 20.00 0.10  
 5.00 0.10  
 5.00 0.10  
 5.00 0.10  
 20.00 0.10  
 5.00 0.10

# Appendix D: 60-Day Space

TPC-C 60-Day Space Requirements						
Warehouses	4,224				tpmC	52,587.46
<b>Table</b>	<b>Rows</b>	<b>Data KB</b>	<b>Index KB</b>	<b>Extra 5% KB</b>	<b>8HR Space</b>	<b>Total Space KB</b>
Warehouse	4,224	456	16	23.60		495.60
District	42,240	4,696	16	235.60		4,947.60
Item	100,000	9,528	32	478.00		10,038.00
New-Order	38,016,000	601,048	1,384		337,920.00	940,352.00
History	126,720,000	7,040,008	24		1,402,338.64	8,442,370.64
Orders	126,720,000	3,884,144	7,912		775,277.80	4,667,333.80
Customer	126,720,000	92,160,000	5,495,352	4,882,767.60		102,538,119.60
Order-Line	1,267,202,941	79,200,184	167,640		15,809,667.69	95,177,491.69
Stock	422,400,000	135,168,000	252,496	6,771,024.80		142,191,520.80
<b>Totals</b>		<b>318,068,064</b>	<b>5,924,872</b>	<b>11,654,529.60</b>	<b>18,325,204.13</b>	<b>353,972,669.73</b>
<b>Segment</b>	<b>LogDev Cnt.</b>	<b>Segment Size</b>	<b>Needed</b>	<b>Overhead</b>		<b>Not Needed</b>
misc	1	133,120,000	109,243,029	1,092,430		22,784,540.38
big	4	266,240,000	244,729,640	2,447,296		19,063,063.20
master, msdb,model	1	13,312	13,312			-
tpcc_root	1	8,192	8,192			-
tempdb	1	8,704	8,704			-
<b>Totals</b>		<b>399,390,208.00</b>	<b>354,002,877.73</b>	<b>3,539,726.70</b>		<b>41,847,603.57</b>
Dynamic Space	90,124,336.00	Sum of Data for Order, Order-Line and History				
Static Space	249,062,856.30	Data + Index + 5% Space + Overhead - Dynamic Space				
Free Space	18,355,412.13	Total Segment Size - Dynamic Space - Static Space - Not needed				
Daily Growth	17,952,310.28	(Dynamic Space/W * 62.5) * tpmC				
Daily Spread	(8,573,053.29)	Free Space - 1.5 * Daily Growth (Zero If Negative)				
60-Day Space (KB)	1,326,201,473.21	Static Space + 60 (Daily Growth + Daily Spread)				
60-Day Space (GB)	1,264.76	60-Day Space in GB (Excludes OS,Paging and RDBMS Logs)				
Available (GB)	3,555.30	Total storage configured and available for database, minus logs, in RAID-0 configuration.				
Log File Storage Requirement						
Log Size (MB)	120,000.00	Total Size of Log File				
% Log Used	28.9127	% of Log File Used During Entire Run				
Total N-O Txn	7,707,095.00	Total Count of New-Order Transactions during Entire Run				
Log / N-O Txn	4.61	KB of Log per New-Order Transaction				
8-Hour Log (GB)	110.97	8 Hours of Log in GB (Excluding Space for Redundancy)				
Log Configured (GB)	135.44					
Disk Capacity	MB	GB				
18.2GB-10K rpm	17,736	16.93				
36.4GB-10K rpm	35,472	33.86				
<b>Space Usage</b>	<b>GB Needed</b>		<b>Disks Priced</b>	<b>Disk Size</b>	<b>GB Priced</b>	<b>GB Usable</b>
60-Day (RAID-0)	1,264.76		210	18.2GB-10K rpm	3,555.30	3,555.30
Total DB						3,555.30
8-Hour Log (RAID-1)	110.97		8	36.4GB-10K rpm	270.88	135.44
Total Log						135.44
OS, SQL Server	4.00		1	18.2GB-10K rpm	16.93	16.93
Total Space	1,379.73		219		3,843.11	3,707.67

---

## Appendix E: Third-Party Quotations

Microsoft Corporation  
One Microsoft Way  
Redmond, WA 98052-6399

Tel 425 882 8080  
Fax 425 936 7329  
<http://www.microsoft.com/>

**Microsoft**

February 25, 2003

IBM Corporation  
Chris King  
3039 Cornwallis Road  
Research Triangle Park,  
NC 27709

Ms. King:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-00846	<b>SQL Server 2000 Enterprise Edition</b> <i>Per processor licensing</i> <i>Discount Schedule: Open Program Level C</i> <i>Unit Price reflects a 17% discount from the retail unit price of \$19,999.</i>	\$16,541	4	\$66,164
C11-00821	<b>Windows 2000 Server</b> <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 8% discount from the retail unit price of \$799.</i>	\$738	2	\$1,476
N/A	<b>Windows Server 2003, Enterprise Server</b> <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 18% discount from the retail unit price of \$3,299.</i>	\$2,699	1	\$2,699
254-00170	<b>Visual C++ Standard</b> <i>No discounts applied</i>	\$109	1	\$109
PRO-PRORS-16U-01	<b>Database Server Support Package</b> <i>1 Year Term</i>	\$1,950	3	\$5,850

Some products may not be currently orderable but will be available through Microsoft's normal distribution channels by February 28, 2003.


Prices for the Microsoft Windows .Net products are considered Not to Exceed pricing. Actual prices will be announced when the Microsoft .Net products are available.







This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or [jamiere@microsoft.com](mailto:jamiere@microsoft.com).

Reference ID: PCchki0325026597

Please include this Reference ID in any correspondence regarding this price quote.







 HOME
  LOG IN
  CART
  CHECKOUT
  CONTACT
  HELP

**Customer Reviews (NE**  
 Submit your review here

search  **GO**
search 
 Track Your Package

- LOG ON >>**
- ★ Contract It  
**GSA** GS-35F-0171M
- CABLES
  - COMPAQ
  - DISK CONTROLLER
  - DVD-RW
  - ENCLOSURES
  - FLASH DEVICES
  - HARD DRIVES
  - HEWLETT PACKARD
  - IBM - SERVERS
  - LIBRARIES/ARRAYS
  - MAGNETO OPTICAL
  - MOTHERBOARD
  - MULTIMEDIA
  - NAS STORAGE
  - NETWORKING
  - NOTEBOOK DRIVES
  - PC PARTS
  - PORTABLES
  - POWER PROTECTION
  - SERVERS
  - SOFTWARE
  - STORAGE COUNTRY
  - SUN
  - TAPE AUTOLOADERS
  - TAPE\_DRIVES
  - TAPE\_MEDIA
  - VIDEO CARD
  - VIDEO DISPLAYS
  - VIDEO EDITING
  - KINGSTON\_MEMORY

	<b>Product Info</b>	<b>Price</b>	<b>QTY</b>	
1873900	ADAPTEC - RAID 3400S RAID KIT 4CH 32MB U160 32BIT/33MHZ PCI VHDCI W/ CABL	\$907.00	<input type="text" value="1"/>	
	<a href="#">Get Details / Accessories</a> <a href="#">More Like This</a> <a href="#">Mfgr Page</a>			
1917400	3410S RAID KIT 4CH 32MB U160 64BIT/66MHZ PCI VHDCI W/ CABL	\$1,029.00	<input type="text" value="1"/>	
	<a href="#">Get Details / Accessories</a> <a href="#">More Like This</a> <a href="#">Mfgr Page</a>			
08P3834	MYLEX EXTREMERAID 2000 2INT CHAN 4EXT UHD CH U160 SCSI 32MB.(E2000-4-32BD)	\$1,217.00	<input type="text" value="1"/>	
	<a href="#">Get Details / Accessories</a> <a href="#">More Like This</a> <a href="#">Mfgr Page</a>			
1931400	ADAPTEC - 5400S SCSI RAID KIT 4CH 128MB FULL OS SUPPORT	\$1,275.00	<input type="text" value="1"/>	
	<a href="#">Get Details / Accessories</a> <a href="#">More Like This</a> <a href="#">Mfgr Page</a>			
08P3835	MYLEX EXTREMERAID 2000 2INT CHAN 4EXT UHD CH U160 SCSI 64MB. (E2000-4-64BD)	\$1,455.00	<input type="text" value="1"/>	
	<a href="#">Get Details / Accessories</a> <a href="#">More Like This</a> <a href="#">Mfgr Page</a>			


Your query resulted in 5 successful hits.  
 You may modify your query below and resubmit.

Search  

Search  

Copyright - ©1999-2000 ComputerGiants.com Inc. All rights reserved. Published by ComputersGiants.com, Inc.  
 All product names throughout this catalog are trademarks of their respective holders





COMPUTER GIANTS  
Servicing the High-end Storage Market.








HOME LOG IN CART CHECKOUT CONTACT HELP

Customer Reviews (NE)  
Submit your review here

search By Keyword or Part# GO search By Manufacturer

Track Your Package

- LOG ON >>
- Contract It  
GSA GS-35F-0171M
- CABLES
  - COMPAQ
  - DISK CONTROLLER
  - DVD-RW
  - ENCLOSURES
  - FLASH DEVICES
  - HARD DRIVES
  - HEWLETT PACKARD
  - IBM - SERVERS
  - LIBRARIES/ARRAYS
  - MAGNETO OPTICAL
  - MOTHERBOARD
  - MULTIMEDIA
  - NAS STORAGE
  - NETWORKING
  - NOTEBOOK DRIVES
  - PC PARTS
  - PORTABLES
  - POWER PROTECTION
  - SERVERS
  - SOFTWARE
  - STORAGE COUNTRY
  - SUN
  - TAPE AUTOLOADERS
  - TAPE\_DRIVES
  - TAPE\_MEDIA
  - VIDEO CARD
  - VIDEO DISPLAYS
  - VIDEO EDITING
  - KINGSTON\_MEMORY

Product Info		Price	QTY	A
FS108NA	NETGEAR FS108 10/100 8PT DS SWCH-W/ UP	\$65.00	<input type="text" value="1"/>	
<a href="#">Get Details / Accessories</a>	<a href="#">More Like This</a>	<a href="#">Mfgr Page</a>		
EZXS88W	EZXS88W ETHERFAST 8PORT 10/100BTX AUTO-SENS SWITCH DESKTOP	\$75.00	<input type="text" value="1"/>	
<a href="#">Get Details / Accessories</a>	<a href="#">More Like This</a>	<a href="#">Mfgr Page</a>		
SVIEW08	8PORT PROCONNECT KVM CONSOLE SWITCH	\$218.50	<input type="text" value="1"/>	
<a href="#">Get Details / Accessories</a>	<a href="#">More Like This</a>	<a href="#">Mfgr Page</a>		
J4898A	PROCURVE SWITCH 2708 UNMANAGED 8PORT RJ45 10/100/1000	\$710.00	<input type="text" value="1"/>	
<a href="#">Get Details / Accessories</a>	<a href="#">More Like This</a>	<a href="#">Mfgr Page</a>		
EG0008	ETHERFAST 8PORT GIGA SWITCH 10/100/1000	\$798.00	<input type="text" value="1"/>	
<a href="#">Get Details / Accessories</a>	<a href="#">More Like This</a>	<a href="#">Mfgr Page</a>		
3C16828	3COM - SWITCHES AND HUBS SWITCH 4005 8PORT 10/100BTX .	\$1,090.00	<input type="text" value="1"/>	
<a href="#">Get Details / Accessories</a>	<a href="#">More Like This</a>	<a href="#">Mfgr Page</a>		
J4902A	PROCURVE 6108 8PORT MANAGED SWITCH 10/100/1000 2-FIBER/8-COPPER	\$1,690.00	<input type="text" value="1"/>	
<a href="#">Get Details / Accessories</a>	<a href="#">More Like This</a>	<a href="#">Mfgr Page</a>		