



Hewlett-Packard Company

TPC Benchmark™ C
Full Disclosure Report
for
HP ProLiant DL585-G2/2.8GHz Dual Core
using
Microsoft SQL Server 2005 Enterprise (x64) Edition (SP1)
and
Windows Server 2003 Enterprise (x64) Edition (SP1)

**First Edition
Submitted for Review
September 26, 2006**

First Edition –September 2006

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2006 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2006

HP, NonStop, ProLiant DL585-G2, and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows 2003, Windows Server 2003 x64 and SQL Server 2005 x64 are registered trademarks of Microsoft Corporation.

Xeon is a registered trademark of Intel.

Opteron is a registered trademark of AMD.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Table of Contents

TABLE OF CONTENTS	3
PREFACE	5
TPC BENCHMARK C OVERVIEW	5
ABSTRACT	6
OVERVIEW.....	6
TPC BENCHMARK C METRICS	6
STANDARD AND EXECUTIVE SUMMARY STATEMENTS	6
AUDITOR	6
GENERAL ITEMS.....	10
TEST SPONSOR.....	10
APPLICATION CODE AND DEFINITION STATEMENTS	10
PARAMETER SETTINGS	10
CONFIGURATION ITEMS	10
CLAUSE 1 RELATED ITEMS	12
TABLE DEFINITIONS	12
PHYSICAL ORGANIZATION OF DATABASE	12
<i>Benchmarked Configuration:</i>	12
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:.....	14
INSERT AND DELETE OPERATIONS.....	14
PARTITIONING	14
REPLICATION, DUPLICATION OR ADDITIONS	14
CLAUSE 2 RELATED ITEMS	15
RANDOM NUMBER GENERATION.....	15
INPUT/OUTPUT SCREEN LAYOUT.....	15
PRICED TERMINAL FEATURE VERIFICATION.....	15
PRESENTATION MANAGER OR INTELLIGENT TERMINAL.....	15
TRANSACTION STATISTICS	15
QUEUING MECHANISM	16
CLAUSE 3 RELATED ITEMS	17
TRANSACTION SYSTEM PROPERTIES (ACID)	17
ATOMICITY	17
<i>Completed Transactions</i>	17
<i>Aborted Transactions</i>	17
CONSISTENCY	17
ISOLATION	17
DURABILITY	18
<i>Durable Media Failure</i>	18
<i>Instantaneous Interruption and Loss of Memory</i>	19
CLAUSE 4 RELATED ITEMS	20
INITIAL CARDINALITY OF TABLES	20

DATABASE LAYOUT	20
TYPE OF DATABASE.....	21
DATABASE MAPPING.....	21
60 DAY SPACE.....	21
CLAUSE 5 RELATED ITEMS.....	22
THROUGHPUT	22
KEYING AND THINK TIMES.....	22
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS	23
STEADY STATE DETERMINATION	28
WORK PERFORMED DURING STEADY STATE.....	28
MEASUREMENT PERIOD DURATION.....	28
REGULATION OF TRANSACTION MIX.....	29
TRANSACTION STATISTICS	29
CHECKPOINT COUNT AND LOCATION	30
CHECKPOINT DURATION.....	30
CLAUSE 6 RELATED ITEMS.....	31
RTE DESCRIPTIONS.....	31
EMULATED COMPONENTS	31
FUNCTIONAL DIAGRAMS	31
NETWORKS	31
OPERATOR INTERVENTION	31
CLAUSE 7 RELATED ITEMS.....	32
SYSTEM PRICING	32
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE	32
COUNTRY SPECIFIC PRICING.....	32
USAGE PRICING	32
CLAUSE 9 RELATED ITEMS.....	33
AUDITOR'S REPORT	33
AVAILABILITY OF THE FULL DISCLOSURE REPORT.....	33
APPENDIX A: SOURCE CODE	A-1 - A-111
APPENDIX B: DATABASE DESIGN	B-1 – B-51
APPENDIX C: TUNABLE PARAMETERS	C-1 - C-73
APPENDIX D: 60-DAY SPACE	D-1 - D-3
APPENDIX E: THIRD PARTY QUOTES	E-1 - E-4
APPENDIX F: PRICE VERIFICATION	F-1

Preface

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.7.

TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant DL585 G2. The operating system used for the benchmark was Windows Server 2003, Enterprise (x64) Edition (SP1). The DBMS used was Microsoft SQL Server 2005 Enterprise (x64) Edition (SP1).

TPC Benchmark C Metrics

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

262,989 tpmC
USD \$2.09 per tpmC

The availability date is March 26, 2007.

Standard and Executive Summary Statements

The following pages contain executive summary of results for this benchmark.

Auditor

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

Hewlett-Packard Company		HP ProLiant DL585 G2 2.8GHz/1MB DC		TPC-C Rev. 5.7
		C/S with 8 HP ProLiant DL360 G4p		Report Date: Sept 26, 2006
Total System Cost		TPC-C Throughput		Price/Performance
USD \$549,416		262,989		USD \$2.09
Database Server Processors /Cores/Threads	Database Manager	Operating System	Other Software	Number of Users
4/8/8 AMD 8220SE 2.8 GHz DC	Microsoft SQL Server 2005 Enterprise x64 Edition SP1	Windows Server 2003 Enterprise x64 Edition SP1	Microsoft Visual C++ Microsoft COM+	208,000
<p>HP ProLiant DL585G2 w/ 2.8 GHz /128GB RAM, 1 SMART Array P600 SAS RAID Controller, 6 SMART Array P800 SAS RAID Controller, 1 SMART Array E500 SAS RAID Controller, 2 X 36GB 10K SFF SAS Drives in internal bay</p> <p>3 HP 5642 Racks containing: 44 X MSA 60 StorageWorks Enclosure with 12 X 36 GB 15K LFF SAS Drives and 2 X MSA 60 StorageWorks Enclosure with 12X 72GB 15K LFF SAS Drives</p> <p>8 RTEs simulating 208,000 PCs</p> <p>HP ProCurve 2824 Switch</p> <p>8 HP ProLiant DL360 G4p</p>				
System Components		Server	Each Client	
Processors/Cores/Threads		Quantity Description	Quantity Description	
Memory		4/8/8 AMD 8220SE 2.8 GHz 1MB cache	1/1/2 3.6 GHz Intel Xeon w/ 2MB cache	
Disk Controllers		128GB (32x 4GB) GB DDR2	1GB 1024 MB	
Disk Drives		1 Smart P600 Controller	1 Integrated Smart Array 6i Controller	
Total Storage		6 Smart P800 Controller		
		1 Smart E500 Controller		
		24 72GB 15K LFF SAS Drives (log)	2 36 GB SCSI Drive	
		528 36 GB 15K LFF SAS Drives (data)		
		2 36 GB 10K SFF SAS Drives (internal, os)		
		19,536 GB	36 GB	

Hewlett-Packard Company	HP ProLiant DL585 G2 Rack				TPC-C Rev. 5.7				
	2.8GHz/1MB DC Client/Server			Report Date		26-Sep-06			
Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price			
Server Hardware									
HP ProLiant DL585 G2 Rack CTO Chassis/dual port NIC	418633-B21	1	3,663	1	3,663				
AMD Opteron 8220SE 2.8 GHz-1 MB Dual-Core Processor 2P Option Kit	413934-L21	1	5,343	1	5,343				
AMD Opteron Processor 8220SE, 2P Dual-Core (2.8 GHz, 120 Watts) Option Kit	413934-B21	1	5,343	1	5,343				
8GB PC2-5300 2 x 4GB Kit	408854-B21	1*	8,499	16	135,984				
HP Smart Array P800/512MB SAS Controller	381513-B21	1*	1,099	6	6,594				
HP Smart Array E500/256 SAS Controller	435129-B21	1*	600	1	600				
HP SMART Array P600 3G SAS/SATA RAID Controller	337972-B21	1	729	1	729				
HP s7540 17in. CRT Monitor	PF997AA#ABA	1	139	1	139				
HP PS/2 Scroll Mouse carbonite	DG169AV	1	5	1	5				
HP Enhanced Keyboard	DG170AV#ABA	1	10	1	10				
HP 5642 Pallet Unassembled Rack	358254-B21	1	689	3	2,067				
UPS R1500 XR Low Voltage US	204404-001	1	866	1	866				
HP 36GB 15K SAS 3.5 Hot Plug Hard Drive	375868-B21	1	269	528	142,032				
HP 36GB 15K SAS 3.5 Hot Plug Hard Drive (10% Spares)	375868-B21	1	269	53		14,257			
HP 72GB 15K SAS 3.5 Hot Plug Hard Drive	375870-B21	1	399	24	9,576				
HP 72GB 15K SAS 3.5 Hot Plug Hard Drive (10% Spares)	375870-B21	1	399	3		1,197			
HP 36GB 10K SAS 2.5 Hot Plug Hard Drive	375859-B21	1	279	2	558				
HP StorageWorks MSA-60 Storage	418408-B21	1*	3,250	46	149,500				
HP StorageWorks MSA-60 Storage (10% Spares)	418408-B21	1*	3,250	5		16,250			
HP 3y 4h 24x7 ProLiant D58x HW Support ,ProLiant Server DL58x	U4608E	1	1,575	1		1,575			
				Subtotal	463,009	33,279			
Server Software									
Microsoft SQL Server 2005 Enterprise X64 Edition(per processor)	810-03150 Microsoft	2	23,911	4	95,644	Incl Below			
Microsoft Visual C++ Standard	254-00170 Microsoft	2	109	1	109	Incl Below			
Microsoft Windows 2003 Server, Enterprise Edition X64	P72-00274 Microsoft	2	2,334	1	2,334	Incl Below			
Microsoft Problem Resolution Services	Microsoft	2	245	1	245				
				Subtotal	98,087	245			
Client Hardware									
HP DL360G4p X3.6GHz/2MB/1GB SCSI US Srvr	376236-001	1	2,699	8	21,592				
Dual Integrated Gigabit NIC, Integrated Smart Array Controller 6i									
36GB 15K U320 Pluggable Hard Drive	286776-B22	1	269	16	4,304				
HP CP 3Y 4H 24x7 HW Entry300 4-Hour 24 Hour x 7 Day Coverage 3 Years	U4497E	1	550	8	4,400				
				Subtotal	25,896	4,400			
Client Software									
Windows Server 2003, Standard Edition	P73-00295 Microsoft	2	719	8	5,752	Incl. Above			
				Subtotal	5,752	0			
User Connectivity									
HP ProCurve Switch 2824	J4903A#ABA	1	2499	1	2,499				
HP CP for HP ProCurve Networking products 3 Yr 4 hr/24x7	U2856E	1	1000	1	1,000				
10 foot Cat5E Non Booted Network Patch Cables	UTP-4P5E-10	3	3	18	56				
10 foot Cat5E Non Booted Network Patch Cables (plus 10% spares)	UTP-4P5E-10	3	3	2	6				
				Subtotal	2,555	1,006			
Large Purchase and Net 30 discount (See Note 1)	16.0%		1		(\$78,625)	(\$6,189)			
				Total	\$516,675	\$32,742			
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.				Three-Year Cost of Ownership: USD \$549,416					
				tpmC Rating: 262,989					
				\$ / tpmC: USD \$2.09					
Pricing: 1=HP Direct 800-203-6748 2= Microsoft 3= Lanshack.com									
Note 1 = Discount based on HP Direct guidance applies to all lines where pricing = 1									
* = These components are not immediately orderable. See the FDR for more information.									
Note 2 = The benchmark results were audited by Lorna Livingtree of Performance Metrics									

Numerical Quantities Summary			
MQTH, Computed Maximum Qualified Throughput	262,989 tpmC		
Response Times (in seconds)	Average	90%	Maximum
New-Order	0.15	0.19	4.51
Payment	0.14	0.16	4.18
Order-Status	0.15	0.18	4.50
Delivery (interactive portion)	0.10	0.11	1.50
Delivery (deferred portion)	0.10	0.13	3.75
Stock-Level	0.15	0.19	4.16
Menu	0.10	0.11	1.50
Transaction Mix, in percent of total transaction			
New-Order			44.92%
Payment			43.01%
Order-Status			4.03%
Delivery			4.01%
Stock-Level			4.03%
Emulation Delay (in seconds)	Resp.Time	Menu	
New-Order	0.10	0.10	
Payment	0.10	0.10	
Order-Status	0.10	0.10	
Delivery (interactive)	0.10	0.10	
Stock-Level	0.10	0.10	
Keying/Think Times (in seconds)	Min.	Average	Max.
New-Order	18.02/0.00	18.03/12.06	18.47/120.90
Payment	3.02/0.00	3.03/12.06	3.47/120.53
Order-Status	2.02/0.00	2.03/10.06	2.46/100.53
Delivery (interactive)	2.02/0.00	2.03/5.07	2.46/50.52
Stock-Level	2.02/0.00	2.03/5.07	2.46/50.53
Test Duration			
Ramp-up time			40 minutes
Measurement interval			120 minutes
Transactions (all types) completed during measurement interval			73,080,704
Ramp down time			5 minutes
Checkpointing			
Number of checkpoints			4
Checkpoint interval			30 minutes

General Items

Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

Application Code and Definition Statements

The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.

Appendix A contains all source code implemented in this benchmark.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

This requirement can be satisfied by providing a full list of all parameters.

Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagram for both the tested and priced systems are included on the following page.

Figure 1. Benchmarked Configuration


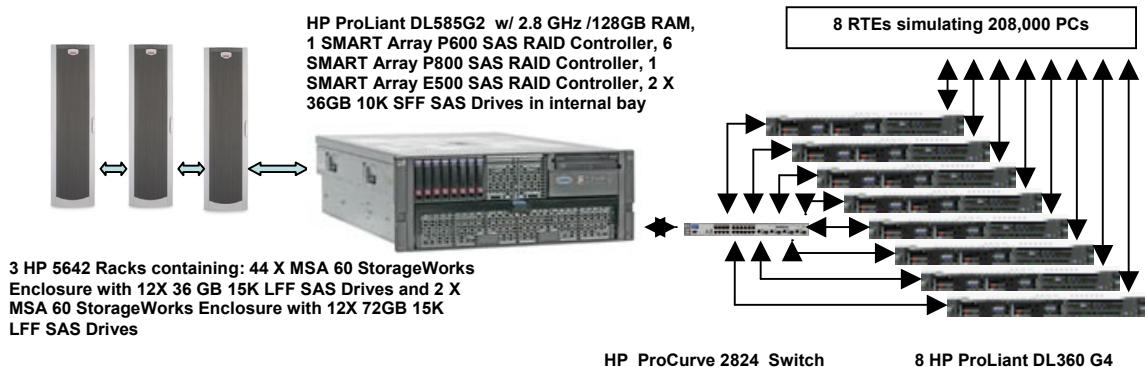


Figure 2. Priced Configuration

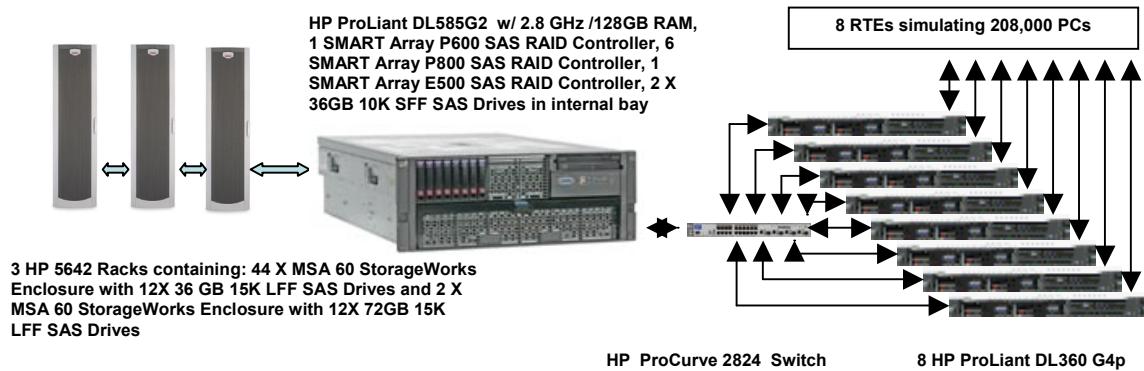

Clause 1 Related Items

Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of 528 drives at 36GB for database data, two 36GB drive for the operating system, and 24 drives at 72GB for database log. There were 528 X 36GB drives for database data on six SMART P800 controllers, 24 X 72 GB drives on the SMART E500 controller, and 2 X 36GB drives on the SMART P600 controller.

Benchmarked Configuration:

SMART-P600 Controller, Slot 2, Array A

<u>LOGICAL DRIVE C:</u>	<u>Total Capacity = 33.91 GB</u>	<u>RAID 0+1</u>
Microsoft Windows Server 2003 Enterprise (X64) Edition (SP1)		

SMART-E500 Controller, Slot 9, Array A

<u>LOGICAL DRIVE E:</u>	<u>Total Capacity = 820.01 GB</u>	<u>RAID 0+1</u>
MSSQL_tpcc_log		

SMART-P800 Controller, Slot 3A, Array A

<u>LOGICAL DRIVE C:\cs\cs1:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc1:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		

SMART-P800 Controller, Slot 4A, Array A

<u>LOGICAL DRIVE C:\cs\cs2:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc2:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		
<u>LOGICAL DRIVE W:</u>	<u>Total Capacity = 727.84GB</u>	<u>RAID 0+1</u>
Tpccback1		

SMART-P800 Controller, Slot 4B, Array A

<u>LOGICAL DRIVE C:\cs\cs3:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc3:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		
<u>LOGICAL DRIVE X:</u>	<u>Total Capacity = 727.84GB</u>	<u>RAID 0+1</u>
Tpccback2		

SMART-P800 Controller, Slot 5A, Array A

<u>LOGICAL DRIVE C:\cs\cs4:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc4:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		
<u>LOGICAL DRIVE Y:</u>	<u>Total Capacity = 727.84GB</u>	<u>RAID 0+1</u>
Tpccback3		

SMART-P800 Controller, Slot 5B, Array A

<u>LOGICAL DRIVE C:\cs\cs5:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc5:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		
<u>LOGICAL DRIVE Z:</u>	<u>Total Capacity = 727.84GB</u>	<u>RAID 0+1</u>
Tpccback4		

SMART-P800 Controller, Slot 6A, Array A

<u>LOGICAL DRIVE C:\cs\cs6:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc6:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		

SMART-P800 Controller, Slot 6B, Array A

<u>LOGICAL DRIVE C:\cs\cs7:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc7:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		

SMART-P800 Controller, Slot 7A, Array A

<u>LOGICAL DRIVE C:\cs\cs8:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc8:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		

SMART-P800 Controller, Slot 7B, Array A

<u>LOGICAL DRIVE C:\cs\cs9:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc9:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		

SMART-P800 Controller, Slot 8A, Array A

<u>LOGICAL DRIVE C:\cs\cs10:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc10:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		

SMART-P800 Controller, Slot 8B, Array A

<u>LOGICAL DRIVE C:\cs\cs11:</u>	<u>Total Capacity = 114.25GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\misc\misc11:</u>	<u>Total Capacity = 56.64GB</u>	<u>RAID 0</u>
Misc_fg		

Priced Configuration vs. Measured Configuration:

The benchmarked configuration used DL360G4 servers for clients. The priced configuration used DL360G4P servers.

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.

All insert and delete functions were fully operational during the entire benchmark.

Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

No partitioning was used in this benchmark.

Replication, Duplication or Additions

Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.

No replications, duplications or additional attributes were used in this benchmark.

Clause 2 Related Items

Random Number Generation

The method of verification for the random number generation must be described.

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none was found.

Input/Output Screen Layout

The actual layout of the terminal input/output screens must be disclosed.

All screen layouts followed the specifications exactly.

Priced Terminal Feature Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

Presentation Manager or Intelligent Terminal

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.

Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

Table 2.1 Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%

Statistic		Value
	Remote warehouse payments	15.00%
	Accessed by last name	60.01%
Order Status	Accessed by last name	60.08%
Transaction Mix	New Order	44.92%
	Payment	43.01%
	Order status	4.03%
	Delivery	4.01%
	Stock level	4.03%

Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

Clause 3 Related Items

Transaction System Properties (ACID)

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

All ACID property tests were successful. The executions are described below.

Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

Consistency

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included a checkpoint.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

Durable Media Failure

Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed. This test was executed on a fully scaled database of 20800 warehouses of which 2080 were used under a load of 20800 users.

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTEs were started with 20800 users.
- The test was allowed to run for a minimum of 10 minutes.
- One disk was removed from one of the MSA 60 cabinets containing the log disks.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the user's status on the RTE.
- One of the data disks was removed from one MSA 60 data drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down, and a database transaction log dump was taken.
- Microsoft SQL Server was shutdown, and the system rebooted after replacing the pulled drives with new drives.
- After the RAID recovery process finished Microsoft SQL Server was started.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in steps 12 and 13 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Instantaneous Interruption and Loss of Memory

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 20800 warehouses under a full load of 208000 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 208000 users.
- The test was allowed to run for a minimum of 10 minutes.
- Pulling the power cords from the SUT induced system crash and loss of memory. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was paused then stopped.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 9 and 10 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Clause 4 Related Items

Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

Table 4.1 Number of Rows for Server

Table	Cardinality as built
Warehouse	20,800
District	208,000
Customer	624,000,000
History	624,000,000
Orders	624,000,000
New Order	187,200,000
Order Line	6,239,983,884
Stock	2,080,000,000
Item	100,000
Deleted Warehouses	0

Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 528 SAS drives at 36GB for database data, two 36GB SAS drives for the operating system, and 24 SAS drives at 72GB for database log. Five SMART P800 controllers connected to 4 MSA60 drive boxes for each of two ports. Each MSA60 contained (12) 36GB SAS drives. The sixth SMART P800 controller connected to 4 MSA60 drive boxes each containing (12) 36GB SAS drives on one port only. Each port was configured in an array. Each array had two RAID 0 logical drives for data, and on two of the controllers each port also contained a RAID 0+1 logical drive for database backup files. The SMART E500 controller was connected to (2) MSA 60's configured as an array with one RAID 0+1 logical drive for the database log. The SMART P600 controller was connected to the internal drive cage which contained 2 X 36GB SAS drives configured as a RAID 0+1 logical drive. The Array Accelerators on the data controllers were configured as 100% write cache and were enabled for all logical drives. The SMART E500 controller had cache disabled for the transaction log. All RAID volumes used hardware RAID.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the file groups and tables is included in Appendix B.

Type of Database

A statement must be provided that describes:

- *The data model implemented by DBMS used (e.g. relational, network, hierarchical).*
- *The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/I, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2005 Enterprise (x64) Edition is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

Database Mapping

The mapping of database partitions/replications must be explicitly described.

The database was not replicated.

60 Day Space

Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using `dbcc sqlperf(logspace)`.
- Transactions were run against the database with a full load of users.
- The free space was again queried using `dbcc sqlperf(logspace)`.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the `sum(d_next_o_id)` taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

Details of both the 8-hour transaction log space requirements and the 60-day space requirements are shown in Appendix D.

Clause 5 Related Items

Throughput

Measured tpmC must be reported

Measured tpmC 262,989tpmC
Price per tpmC USD \$2.09

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.

Table 5.2: Response Times

Type	Average	90 th %	Maximum
New-Order	0.15	0.19	4.51
Payment	0.14	0.16	4.18
Order-Status	0.15	0.18	4.50
Interactive Delivery	0.10	0.11	1.50
Deferred Delivery	0.10	0.13	3.75
Stock-Level	0.15	0.19	4.16
Menu	0.10	0.11	1.50

Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 5.3: Keying Times

Type	Minimum	Average	Maximum
New-Order	18.02	18.03	18.47
Payment	3.02	3.03	3.47
Order-Status	2.02	2.03	2.46
Interactive Delivery	2.02	2.03	2.46
Stock-Level	2.02	2.03	2.46

Table 5.4: Think Times

Type	Minimum	Average	Maximum
New-Order	0.00	12.06	120.90
Payment	0.00	12.06	120.53
Order-Status	0.00	10.06	100.53
Interactive Delivery	0.00	5.07	50.52
Stock-Level	0.00	5.07	50.53

Response Time Frequency Distribution Curves and Other Graphs

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.

Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 3. New Order Response Time Distribution

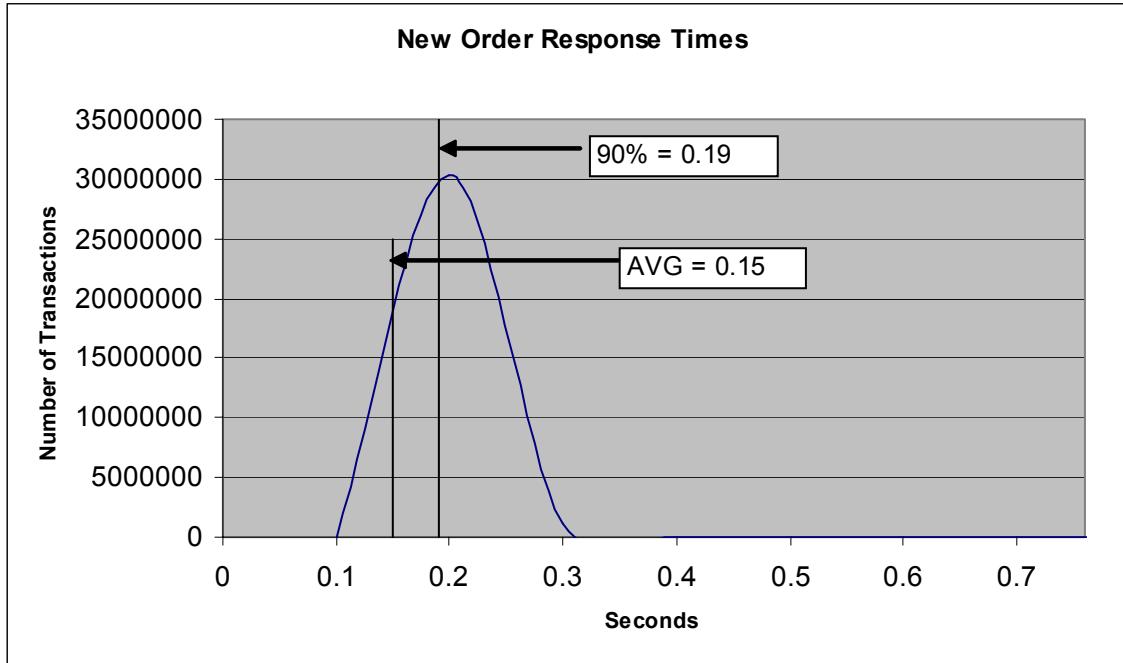


Figure 4. Payment Response Time Distribution

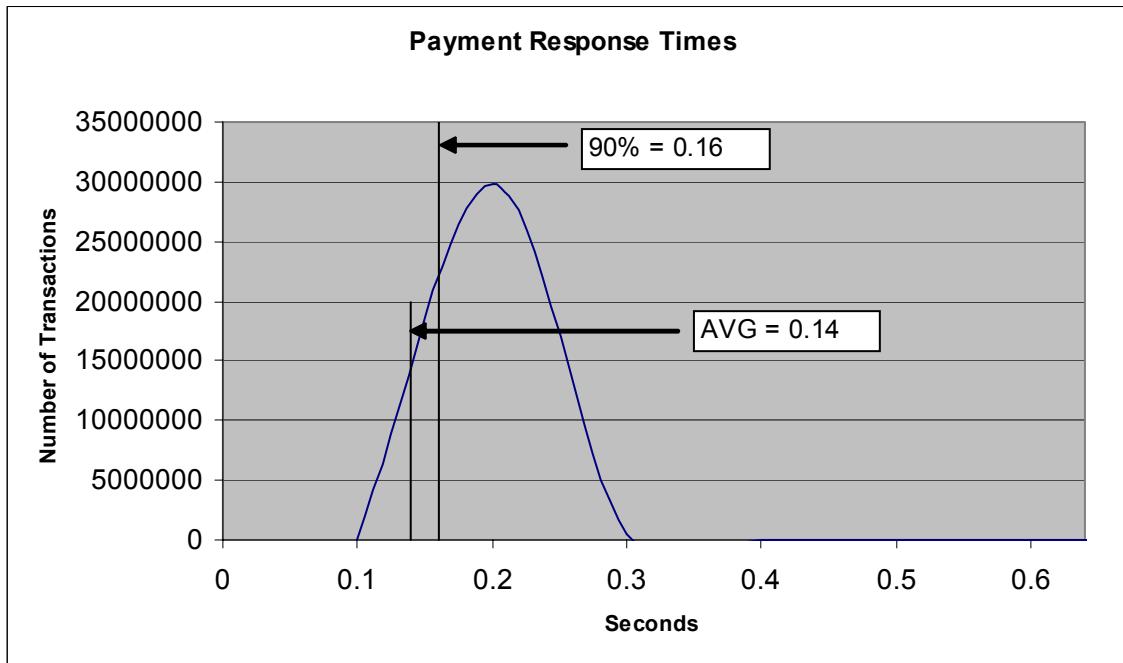


Figure 5. Order Status Response Time Distribution

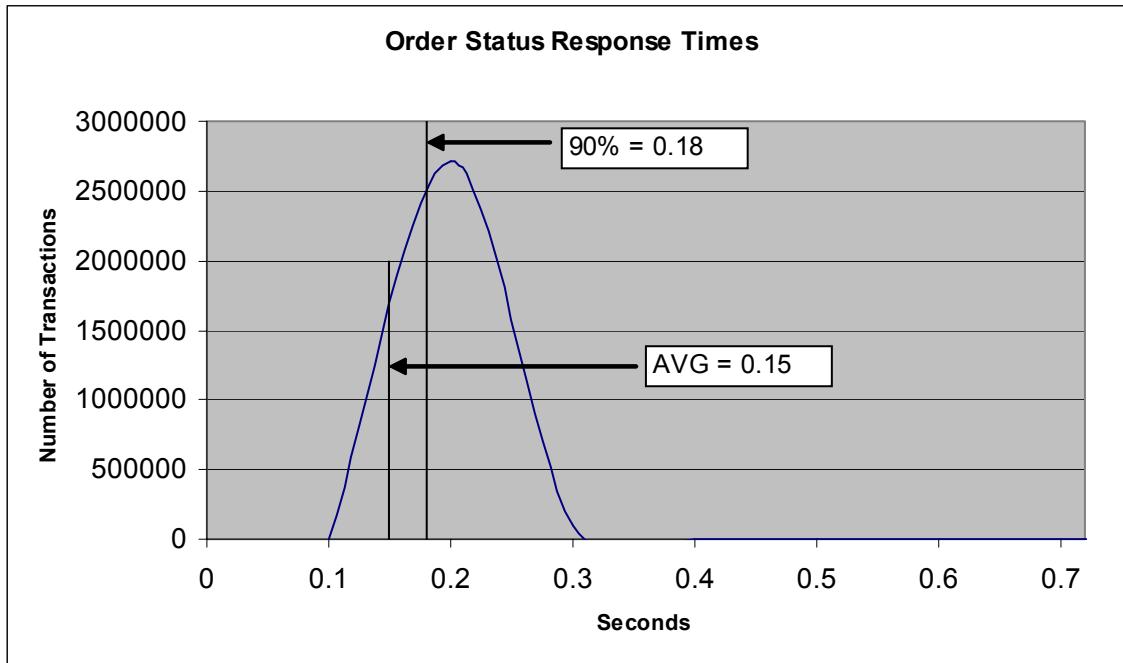


Figure 6. Delivery Response Time Distribution

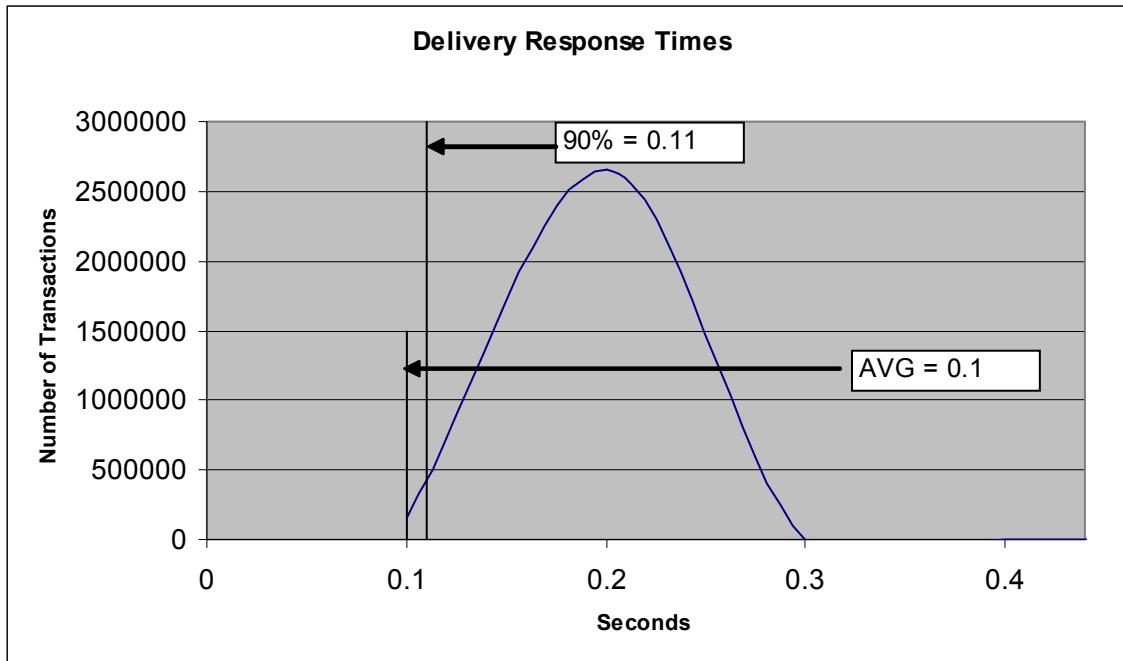


Figure 7. Stock Level Response Time Distribution

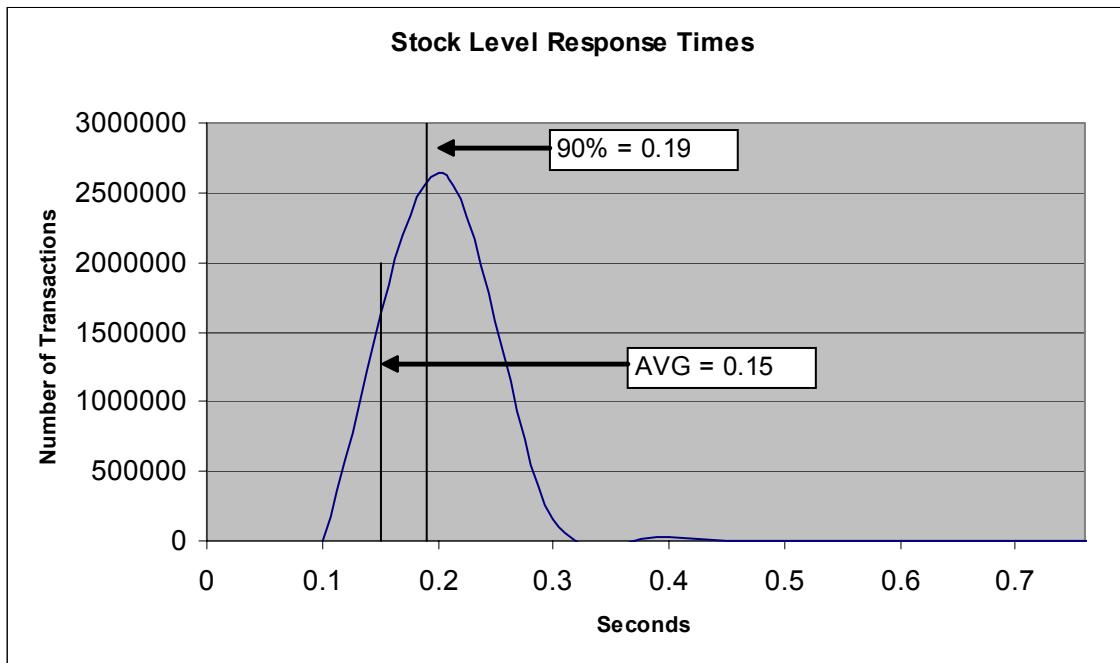


Figure 8. Response Time vs. Throughput

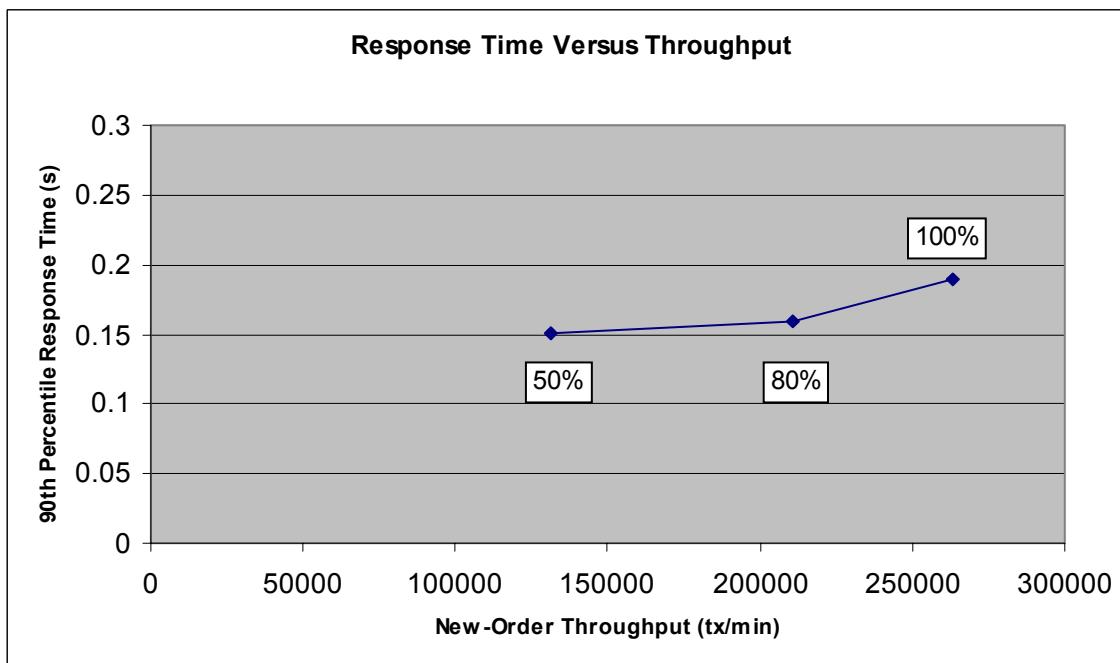


Figure 9. New Order Think Time Distribution


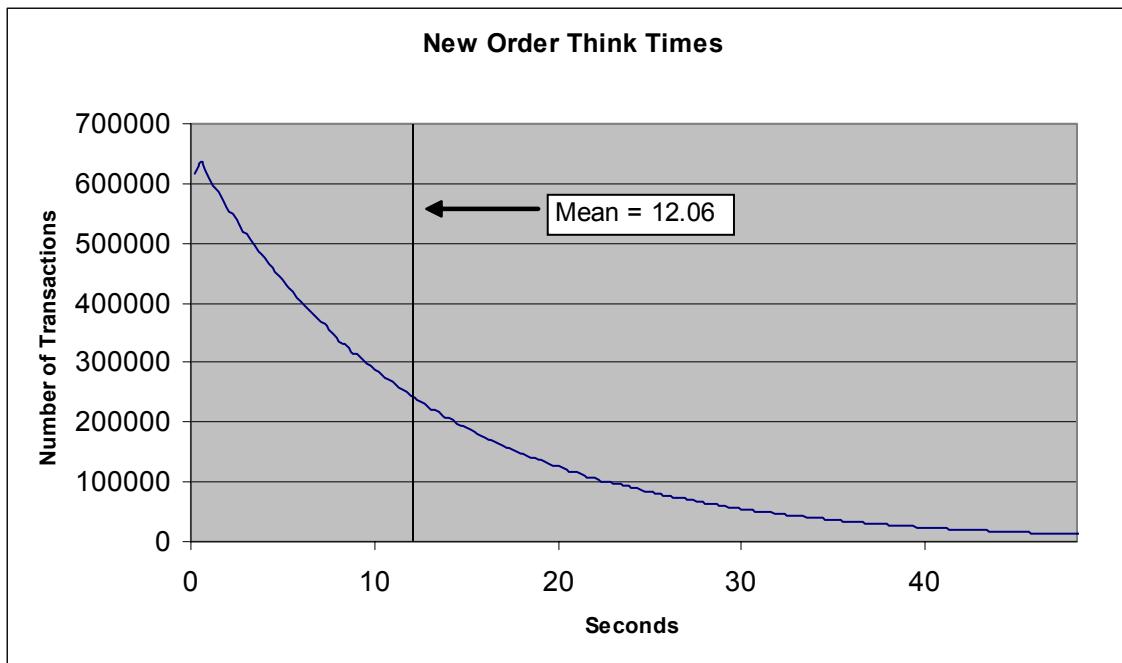


Figure 10. Throughput vs. Time Distribution

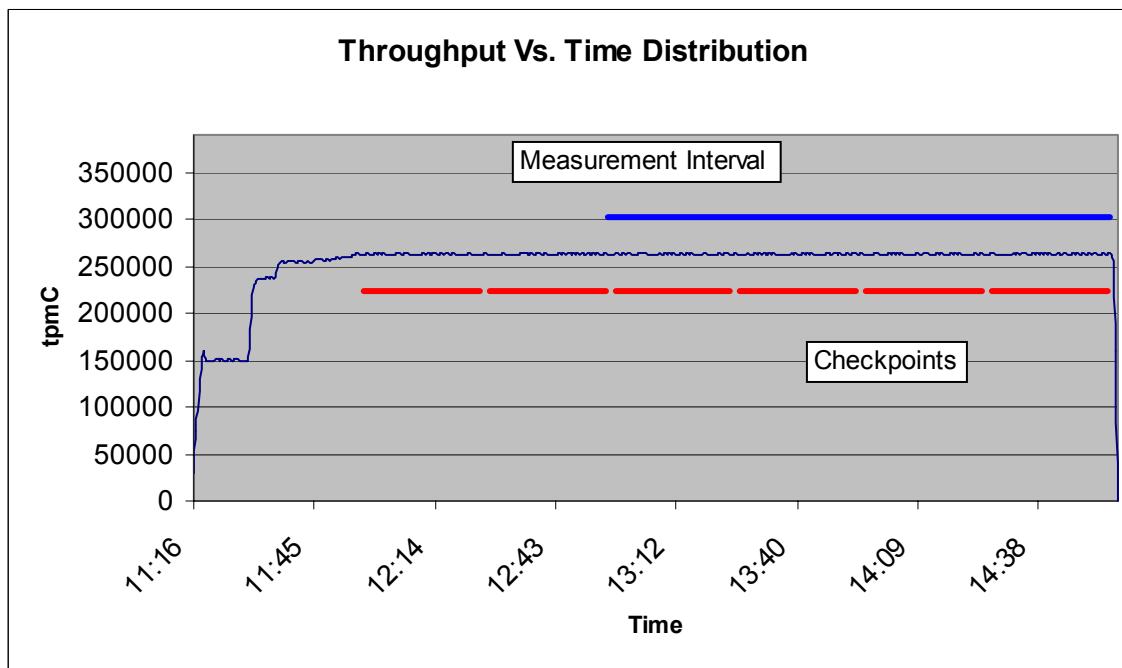

Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The input screen for the requested transaction was returned and timestamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over gigabit Ethernet LANs using ODBC and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 32767 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes. The measurement interval was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 9.

Measurement Period Duration

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The reported measured interval was exactly 120 minutes long.

Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution, which was not adjusted during the run.

Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

Table 5.5: Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.01%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	60.08%
Transaction Mix	New Order	44.92%
	Payment	43.01%
	Order status	4.03%
	Delivery	4.01%
	Stock level	4.03%

Checkpoint Count and Location

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

The initial checkpoint was started 41 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. Each checkpoint in the measurement interval lasted 27 minutes and 30 seconds. The measurement interval contains four checkpoints.

Checkpoint Duration

The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.

Checkpoint Start Time	Duration
12:57:24.70 pm	27 minutes, 30 seconds
13:27:21.68 pm	27 minutes, 30 seconds
13:57:18.70 pm	27 minutes, 30 seconds
14:27:15.70 pm	27 minutes, 30 seconds

Clause 6 Related Items

RTE Descriptions

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input is listed in Appendix A.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

The driver system consisted of 8 HP ProLiant servers. These driver machines emulated the users' web browsers.

Functional Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

Networks

The network configuration of both the tested services and proposed (target) services that are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.

The bandwidth of the networks used in the tested/priced configuration must be disclosed.

In the tested configuration, 8 driver (RTE) machines were connected through a gigabit Ethernet switch to the client machines at 1Gbps, thus providing the path from the RTEs to the clients. The server (SUT) was connected to the clients through a gigabit Ethernet switch on a separate LAN.

The priced configuration was connected in the same manner as the tested configuration.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 Related Items

System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

• Maximum Qualified Throughput	262,989tpmC
• Price per tpmC	USD \$2.09 per tpmC
• Availability	March 26, 2007

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 8 Microsoft Windows Server 2003 Standard Edition
- 1 Microsoft Windows Server 2003 Enterprise x64 Edition (SP1)
- 1 Microsoft SQL Server 2005 Enterprise x64 Edition (per processor) (SP1)
- 1 Microsoft Visual C++
- HP Servers include 3 years of support.

Clause 9 Related Items

Auditor's Report

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.
PO Box 984
Klamath CA 95548
(phone) 707-482-0523
(fax) 707-482-0575
e-mail: lornaL@perfmetrics.com

Availability of the Full Disclosure Report

The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

TPC
Presidio of San Francisco
Building 572B Ruger St. (surface)
P.O. Box 29920 (mail)
San Francisco, CA 94129-0920

or

Hewlett-Packard Company
Database Performance Engineering
P.O. Box 692000
Houston, TX 77269-2000



September 19, 2006

Mr. David Adams
Database Performance Engineer
Hewlett-Packard Company
20555 SH 249
Houston, TX 77070

I have verified by remote the TPC Benchmark™ C for the following configuration:

Platform: HP ProLiant DL585 G2
Database Manager: Microsoft SQL Server 2005 Enterprise X64 Edition SP1
Operating System: Microsoft Windows Server 2003 Enterprise X64 Edition SP1
Transaction Monitor: Microsoft COM+

System Under Test:				
CPU's	Memory	Disks (total)	90% Response	TpmC
4 AMD8220SE @ 2.8 GHz	Main: 128 GB	530 @ 36 GB 24 @ 72 GB	0.19	262,989

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized.
- The database was properly scaled with 20,800 warehouses, all of which were active during the measured interval.
- The ACID properties were successfully demonstrated.
- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 days space calculation was verified.
- The steady state portion of the test was 120 minutes.
- There was one complete checkpoint in steady state before the measured interval.
- There were 4 checkpoints started and completed inside the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.

Auditor Notes: None

Sincerely,

A handwritten signature in black ink, appearing to read "Lorna Livingtree".

Lorna Livingtree
Auditor

Appendix A: Source Code

The client source code is listed below.

dlldata.c

```
*****  
***** DllData file -- generated by MIDL compiler  
  
DO NOT ALTER THIS FILE  
  
This file is regenerated by MIDL on every IDL file  
compile.  
  
To completely reconstruct this file, delete it and  
rerun MIDL  
on all the IDL files in this DLL, specifying this  
file for the  
/dlldata command line option  
*****  
*****  
  
#include <rpcproxy.h>  
  
#ifdef __cplusplus  
extern "C"  
{  
#endif  
  
EXTERN_PROXYFILE( tpcc_com_ps )  
  
PROXYFILE_LIST_START  
/* Start of list */  
REFERENCE_PROXYFILE( tpcc_com_ps ),  
/* End of list */  
PROXYFILE_LIST_END  
  
DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )  
  
#ifdef __cplusplus  
} /*extern "C" */  
#endif  
  
/* end of generated dlldata file */
```

error.h

```
/* FILE: ERROR.H Microsoft  
TPC-C Kit Ver. 4.20.000 Copyright Microsoft, 1999  
* All Rights Reserved  
* Version 4.10.000 audited by Richard Gimarc, Performance Metrics, 3/17/99  
* PURPOSE: Header file for error exception classes.  
* Change history:  
* 4.20.000 - updated rev number to match kit  
* 4.21.000 - fixed bug: ~CBaseErr needed to be declared virtual  
*/  
  
#pragma once  
  
#ifndef _INC_STRING  
#include <string.h>  
#endif  
  
const int m_szMsg_size = 512;  
const int m_szApp_size = 64;  
const int m_szLoc_size = 64;  
  
//error message structure used in ErrorText routines  
typedef struct _SERRORMSG  
{  
    int iError;  
    //error id of message  
    char szMsg[256];  
    //message to sent to browser  
} SERRORMSG;  
  
typedef enum _ErrorLevel  
{  
    ERR_FATAL_LEVEL = 1,  
    ERR_WARNING_LEVEL = 2,  
    ERR_INFORMATION_LEVEL = 3  
} ErrorLevel;  
  
#define ERR_TYPE_LOGIC -1  
//logic error in program; internal error  
#define ERR_SUCCESS 0  
//success (a non-error error)  
#define ERR_BAD_ITEM_ID 1  
//expected abort record in txnRecord  
#define ERR_TYPE_DELIVERY_POST 2  
//expected delivery post failed  
  
#define ERR_TYPE_WEBDLL 3  
//tpcc web generated error  
#define ERR_TYPE_SQL 4  
//sql server generated error  
#define ERR_TYPE_DBLIB 5  
//dblib generated error  
#define ERR_TYPE_ODBC 6  
//odbc generated error  
#define ERR_TYPE_SOCKET 7  
//error on communication socket client rte only  
#define ERR_TYPE_DEADLOCK 8  
//dblib and odbc only deadlock condition  
#define ERR_TYPE_COM 9  
//error from COM call  
#define ERR_TYPE_TUXEDO 10  
//tuxedo error  
#define ERR_TYPE_OS 11  
//operating system error  
#define ERR_TYPE_MEMORY 12  
//memory allocation error  
#define ERR_TYPE_TPCC_ODBC 13  
//error from tpcc odbc txn module  
#define ERR_TYPE_TPCC_DBLIB 14  
//error from tpcc dblib txn module  
#define ERR_TYPE_DELISRV 15  
//delivery server error  
#define ERR_TYPE_TXNLOG 16  
//txn log error  
#define ERR_TYPE_ECCONN 17  
//Benchcraft connection class  
#define ERR_TYPE_TPCC_CONN 18  
//Benchcraft connection class  
#define ERR_TYPE_ENCINA 19  
//Encina error  
#define ERR_TYPE_COMPONENT 20  
//error from COM component  
#define ERR_TYPE_RTE 21  
//Benchcraft rte  
#define ERR_TYPE_AUTOMATION 22  
//Benchcraft automation errors
```

```

#define ERR_TYPE_DRIVER 23
    //Driver engine errors
#define ERR_TYPE_RTE_BASE 24
    //Framework errors
#define ERR_BUF_OVERFLOW 25
    //Buffer overflow during receive
#define ERR_TYPE_SOAP_HTTP 26
    //HTTP/SOAP dll generated error
#define ERR_TYPE_OLEDB 27
    //OLE-DB generated error
#define ERR_TYPE_TPCC_OLEDB 28
    //error from tpcc ole-db txn module
// TPC-W error types
#define ERR_TYPE_TPCW_CONN 50
    //Benchcraft connection class
#define ERR_TYPE_TPCW_HTML 51
    //error from TpcwHtml dll
#define ERR_TYPE_TPCW_USER 52
    //error from TPC-W user class
#define ERR_TYPE_TPCW_ENG_BASE 53
#define ERR_TYPE_TPCW_ENG_OS 54
#define ERR_TYPE_HTML_RESP 55
#define ERR_TYPE_TPCW_ODBC 56
#define ERR_TYPE_SCHANNEL 57
#define ERR_TYPE_THINK_LIST 58
//----- end TPC-W -----
#define ERR_TYPE_XML_PROFILE 59
// TPC-E error types
#define ERR_TYPE_TPCE_CONN 60
    //TPC-E pipe connection errors
#define ERR_TYPE_TPCE RTE 61
    //TPC-E Rte errors
#define ERR_TYPE_TPCE_ENG_BASE 62
    //Tpce Driver engine errors
#define ERR_TYPE_TPCE_ENG_OS 63
    //Tpce Driver
engine system errors
//#define ERR_TYPE_TPCE_MEE_ENG_BASE 64
    //Tpce MEE
Driver engine errors
//#define ERR_TYPE_TPCE_MEE_ENG_OS 65
    //Tpce MEE
Driver engine system errors

```

```

#define ERR_INS_MEMORY
    "Insufficient Memory to continue."
#define ERR_UNKNOWN
    "Unknown error."
#define ERR_MSG_BUF_SIZE 512
#define INV_ERROR_CODE -1
#define ERR_INS_BUF_OVERFLOW "Insufficient Buffer size to receive HTML pages."

class CBaseErr
{
public:
    enum Action
    {
        eNone = 0
    };

    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg = GetLastErrorMessage(); //take the error code immediately before it is reset by other functions
        if (szLoc)
        {
            m_szLoc = new char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp = new char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL), m_szApp, m_szApp_size);
    }

    CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
    {
        m_idMsg = idMsg;
        if (szLoc)
        {
            m_szLoc = new char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp = new char[m_szApp_size];
    }

```

```

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    virtual ~CBaseErr(void)
    {
        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };

    virtual void Draw(HWND hwnd, LPCTSTR szStr
= NULL)
    {
        int j = 0;
        char szTmp[512];
        if (szStr)
            j += wsprintf(szTmp,
"%s\n", szStr);
        if (ErrorNum() != INV_ERROR_CODE)
            j += wsprintf(szTmp+j,
"Error = %d\n", ErrorNum());
        if (m_szLoc)
            j += wsprintf(szTmp+j,
"Location = %s\n", GetLocation());
        j += wsprintf(szTmp+j, "%s\n",
ErrorText());
        MessageBox(hwnd, szTmp, m_szApp,
MB_OK);
    }

    char *GetApp(void) { return m_szApp; }
    char *GetLocation(void) { return m_szLoc; }
    virtual int ErrorNum() { return m_idMsg; }

    virtual int ErrorType() = 0; // a value which distinguishes the kind of error that occurred
    virtual char *ErrorTypeStr() = 0; // text representation of the error type
    virtual char *ErrorText() = 0; // a string (i.e., human readable) representation of the error
    virtual int ErrorAction() { return eNone; } // the function call that caused the error

protected:
    char *m_szApp;
    char *m_szLoc; // code location where the error occurred
    int m_idMsg;
    //short m_errType;
};

class CSocketErr : public CBaseErr
{

```

```

public:
    enum Action
    {
        eNone = 0,
        eSend,
        eSocket,
        eBind,
        eConnect,
        eListen,
        eHost,
        eRecv,
        eGetHostByName,
        eWSACreateEvent,
        eWSASend,
        eWSAGetOverlappedResult,
        eWSARecv,
        eWSAWaitForMultipleEvents,
        eWSAStartup,
        eWSAResetEvent,
        eWSAEnumNetworkEvents,
        eWSAEventSelect,
        eSelect,
        eAccept,
        eNonRetryable
    };

    CSocketErr(Action eAction, LPCTSTR
szLocation = NULL);

    ~CSocketErr()
    {
        if (m_szErrorText != NULL)
            delete []
    }

    Action    m_eAction;
    char     *m_szErrorText;

    int           ErrorType() { return
ERR_TYPE_SOCKET; };
    char*        ErrorTypeStr() { return "SOCKET";
}
    char*        ErrorText(void);
    int           ErrorAction() { return
(int)m_eAction; }

};

class CSysErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile = 10,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        ebeginthread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
        eRegisterClassEx,
        eCreateWindow,
        eCreateSemaphore,
        eReleaseSemaphore,
        eSeek,
        eRead,
        eFWrite,
        eTmpFile,
        eSetFilePointer,
        eNew,
        eCloseHandle,
        eGetOverlappedResult
    };

    CSysErr(Action
eAction, LPCTSTR szLocation);
    CSysErr(int iError,
Action eAction, LPCTSTR szLocation);
    int           ErrorType() { return
ERR_TYPE_OS; };
    char*        ErrorTypeStr() { return "SYSTEM";
}
    char*        *ErrorText(void);
    int           ErrorAction() { return
(int)m_eAction; }
    void         Draw(HWND hwnd, LPCTSTR szStr =
NULL);

    Action    m_eAction;

private:
    char m_szMsg[ERR_MSG_BUF_SIZE];
};

class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr();

    int           ErrorType() { return
ERR_TYPE_MEMORY; };
    char*        ErrorTypeStr() { return "OUT OF
MEMORY"; };
    char*        ErrorText() { return
ERR_INS_MEMORY; }
};

class CBufferOverflowErr : public CBaseErr
{
public:
    CBufferOverflowErr(int,LPTSTR);

    int           ErrorType() { return
ERR_BUF_OVERFLOW; };
    char*        ErrorTypeStr() { return "BUFFER
OVERFLOW"; };
    char*        ErrorText() { return
ERR_INS_BUF_OVERFLOW; }

// Exception type for XML profiles
class CXMLProfileErr : public CBaseErr
{
public:
    enum Action
    {
        LoadProfile = 1,
        LoadSchema,
        ValidateProfile,
        SaveProfile,
        LoadFromXML,
        SaveToXML,
        ApplyProcessingInstruction,
        ApplyAttribute,
        ApplyNode
    };

    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        m_bOverload = true;
    };

    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation, char * szMsg)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        strcpy(m_szMsg, szMsg);
        m_bOverload = false;
    };

    virtual int
ErrorType() { return
ERR_TYPE_XML_PROFILE; };
    virtual char
*ErrorTypeStr() { return "XML PROFILE"; };
    virtual char
*ErrorText() { return
ERR_INS_XML_PROFILE; };

    virtual int
ErrorCode() { return m_eCode; };
    int           ErrorAction() { return (int)m_eAction; }
    void         Draw(HWND
hwnd, LPCTSTR szStr = NULL)
    //{{{
};

```

```

        // ::MessageBox(hwnd,
szStr, m_szLoc, MB_OK);
        //};

private:
    char
m_szMsg[ERR_MSG_BUF_SIZE];
    LPCTSTR m_szLoc;
    int           m_eCode;
    bool          m_bOverload;
    Action        m_eAction;
};


```

install.c

```

/*      FILE:          INSTALL.C
 *      Microsoft
TPC-C Kit Ver. 4.51.000
*      Copyright
Microsoft, 2003
*          All Rights Reserved
*
*          not audited
*
*      PURPOSE: Automated installation
application for TPC-C Web Kit
*      Contact: Charles Levine
(clevine@microsoft.com)
*
*      Change history:
*          4.20.000 - added COM installation
steps
*          4.50.000 - added IIS6 configuration options
*          4.51.000 - added routines to copy
Visual Studio runtime module (MSVCR70.DLL)
*          to
SystemRoot\System32
*/
#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <tchar.h>
#include <stdio.h>
#include <commctrl.h>
#include "../common\src\ReadRegistry.h"
#include <process.h>

#include "resource.h"

#define WM_INITTEXT          WM_USER+100
HICON                 hIcon;
HINSTANCE hInst;

DWORD                versionExeMS;
DWORD                versionExeLS;
DWORD                versionExeMM;
DWORD                versionDllMS;
DWORD                versionDllLS;

```

```

// TPC-C registry settings
TPCCREGISTRYDATA     Reg;

static   int           iPoolThreadLimit;
static   int           iMaxPoolThreads;
static   int           iThreadTimeout;
static   int           iListenBackLog;
static   int           iAcceptExOutstanding;
static   int           iUriEnableCache;
static   int           iUriScavengerPeriod;
static   int           iMaxConnections;

static   int           iIISMajorVersion;
static   int           iNumberOfProcessors;

static   int           iMaxPhysicalMemory;
//max physical memory in MB
static   char          szLastFileName[64];           // last file we worked on (for error reporting)

BOOL     CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL     CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL     CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL     CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
static  void           ProcessOK(HWND hwnd, char *szDllPath, char *szWindowsPath);
static  void           ReadRegistrySettings(void);
static  void           WriteRegistrySettings(char *szDllPath);
static  BOOL            RegisterDLL(char *szFileName);
static  int             CopyFiles(HWND hDlg, char *szDllPath, char *szWindowsPath);
static  BOOL            GetInstallPath(char *szDllPath);
static  BOOL            GetWindowsInstallPath(char *szWindowsPath);
static  void           GetVersionInfo(char *szDLLPath, char *szExePath);
static  BOOL            CheckWWWWebService(void);
static  BOOL            StartWWWWebService(void);
static  BOOL            StopWWWWebService(void);
static  void           UpdateDialog(HWND hDlg);
static  void           ConfigureIIS6(HWND hwnd, HWND hDlg);

SYSTEM_INFO siSysInfo;

BOOL install_com(char *szDllPath);
#include "...\\common\\src\\ReadRegistry.cpp"

```

```

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE hPrevInstance, LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;
    InitCommonControls();
    hIcon = LoadIcon(hInstance, MAKEINTRESOURCE(IDI_ICON1));
    iRc = DialogBox(hInstance, MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(), LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance, MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(), MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance, MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(), UpdatedDlgProc, (LPARAM)iRc);
        }
    }
    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
    HGLOBAL          hRes;
    HRSRC           hResInfo;
    BYTE             *pSrc, *pDst;
    DWORD            dwSize;
    static  HFONT    hFont;
    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12, 0, 0, 0, 400, 0, 0, 0, 0, 0, 0, 0, 0, 0, "Arial");
            SendMessage(
GetDlgItem(hwnd, IDR_LICENSE1), WM_SETFONT, (WPARAM)hFont, MAKELPARAM(0, 0));
            PostMessage(hwnd, WM_INITTEXT, (WPARAM)0, (LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo =
FindResource(hInst, MAKEINTRESOURCE(IDR_LICENSE1), "LICENSE");
            dwSize =
SizeofResource(hInst, hResInfo);
            hRes =
LoadResource(hInst, hResInfo );
            pSrc = (BYTE *)LockResource(hRes);

```

```

*)malloc(dwSize+1);
    pDst = (unsigned char
    if ( pDst )
    {
        memcpy(pDst,
pSrc, dwSize);
        pDst[dwSize]
= 0;

        SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
        free(pDst);
    }
    else

        SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
        return TRUE;
    case WM_DESTROY:
        DeleteObject(hFont);
        return TRUE;
    case WM_COMMAND:
        if ( wParam == IDOK )
            EndDialog(hwnd, TRUE);
            if ( wParam == IDCANCEL
)
                EndDialog(hwnd, FALSE);
                default:
                    break;
            }
            return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:
                    SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C
Web Client Installed");
                    break;
                }
                return TRUE;
            case WM_COMMAND:
                if ( wParam == IDOK )
                    EndDialog(hwnd, TRUE);
                    break;
                default:
                    break;
            }
            return FALSE;
}

```

```

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFO VI;
    static char szTmp[256];
    static char szDllPath[256];
    static char szWindowsPath[256];
    static char szExePath[256];

    switch(uMsg)
    {
        case WM_INITDIALOG:
            GlobalMemoryStatus(&memoryStatus);
            iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);
            if (
GetWindowsInstallPath(szWindowsPath) )
            {
                MessageBox(hwnd, "Error: Cannot determine
Windows System Root.", NULL, MB_ICONSTOP | MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }
            if (
GetInstallPath(szDllPath) )
            {
                MessageBox(hwnd, "Error internet service
inetsrv is not installed.", NULL, MB_ICONSTOP | MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }
            // set default values
            ZeroMemory( &Reg,
sizeof(Reg) );
            Reg.dwNumberOfDeliveryThreads = 4;
            Reg.dwMaxConnections =
100;
            Reg.dwMaxPendingDeliveries = 100;
            Reg.eDB_Protocol =
ODBC;
            Reg.eTxnMon = None;
            strcpy(Reg.szDbServer,
(""));
            strcpy(Reg.szDbName,
"tpcc");
            strcpy(Reg.szDbUser,
"sa");

```

```

strcpy(Reg.szDbPassword, "");
iPoolThreadLimit =
iMaxPhysicalMemory * 2;
iThreadTimeout = 86400;
iListenBackLog = 15;
iAcceptExOutstanding =
40;

ReadTPCCRegistrySettings( &Reg );
ReadRegistrySettings();

// copy the hardware
information to the SYSTEM_INFO structure
GetSystemInfo(&siSysInfo);
// store the number of
processors on this system
iNumberOfProcessors =
siSysInfo.dwNumberOfProcessors;

GetModuleFileName(hInst, szExePath,
sizeof(szExePath));
GetVersionInfo(szDllPath, szExePath);
wsprintf(szTmp,
"Version %d.%2.2d.%3.3d", versionExeMS, versionExeLS);
SetDlgItemText(hwnd,
IDC_VERSION, szTmp);
SetDlgItemText(hwnd,
IDC_PATH, szDllPath);
SetDlgItemText(hwnd,
ED_DB_SERVER, Reg.szDbServer);
SetDlgItemText(hwnd,
ED_DB_USER_ID, Reg.szDbUser);
SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);
SetDlgItemText(hwnd,
ED_DB_NAME, Reg.szDbName);
SetDlgItemInt(hwnd,
ED_THREADS, Reg.dwNumberOfDeliveryThreads, FALSE);
SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);
SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);
SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit,
FALSE);
SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);
SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);
SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);

```

```

        // check OS version
level for COM. Must be at least Windows 2000
        VI.dwOSVersionInfoSize
= sizeof(VI);
        GetVersionEx( &VI );
        if (VI.dwMajorVersion <
5)
        {
            HWND hDlg =
GetDlgItem( hwnd, IDC_TM_MTS );
            EnableWindow(
hDlg, 0 ); // disable COM option
            if
(Reg.eTxnMon == COM)

                Reg.eTxnMon = None;
            }

            CheckDlgButton(hwnd,
IDC_TM_NONE, 0 );
            CheckDlgButton(hwnd,
IDC_TM_MTS, 0 );
            switch (Reg.eTxnMon)
            {
                case None:
                    CheckDlgButton(hwnd, IDC_TM_NONE, 1 );
                    break;
                case COM:
                    CheckDlgButton(hwnd, IDC_TM_MTS, 1 );
                    break;
            }
            return TRUE;
        case WM_PAINT:
            if ( IsIconic(hwnd) )
            {

                BeginPaint(hwnd, &ps);
                DrawIcon(ps.hdc, 0, 0, hIcon);
                EndPaint(hwnd, &ps);
                return TRUE;
            }
            break;
        case WM_COMMAND:
            if ( HIWORD(wParam) ==
BN_CLICKED )
            {
                switch(
LOWORD(wParam) )
                {
                    case IDOK:
                        ProcessOK(hwnd, szDllPath, szWindowsPath);
                        return TRUE;
                    case IDCANCEL:

```

```

                        EndDialog(hwnd, FALSE);
                        return TRUE;
                    default:
                        return FALSE;
                }
            }
            default:
                break;
        }
        return FALSE;
    }

    static void ProcessOK(HWND hwnd, char *szDllPath,
char *szWindowsPath)
{
    int d;
    HWND hDlg;
    int rc;
    BOOL bSvcRunning;
    char szFullName[256];
    char szErrTxt[128];

    // Check whether Service Pack 1 has been
installed if
        // running on Windows Server 2003. The RTM
version has
        // a limitation on the number of concurrent
HTTP connections.
        //
        OSVERSIONINFOEX VersionInfo;
    VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
    if
        (GetVersionEx((LPOVERSIONINFO)&VersionInfo))
        {
            if (VersionInfo.dwMajorVersion ==
5 && // Windows 2000/2003 Server?
                VersionInfo.dwMinorVersion == 2 && // Windows
2003 Server?

                VersionInfo.wServicePackMajor == 0) // Service
Pack installed?
            {
                TCHAR szMsg[256];
                _snprintf(szMsg,
sizeof(szMsg),
running on Windows Server 2003 without at least
Service Pack 1\n"
                                         "limits the
number of concurrent HTTP connections to around
8000.");

```

```

                MessageBox(hwnd, szMsg,
_T("Service Pack not Installed"), MB_ICONEXCLAMATION
| MB_OK);
}

// read settings from dialog
Reg.dwNumberOfDeliveryThreads =
GetDlgItemInt(hwnd, ED_THREADS, &d, FALSE);
Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
Reg.dwMaxPendingDeliveries =
GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d, FALSE);

GetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer, sizeof(Reg.szDbServer));
GetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser, sizeof(Reg.szDbUser));
GetDlgItemText(hwnd, ED_DB_PASSWORD,
Reg.szDbPassword, sizeof(Reg.szDbPassword));
GetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName, sizeof(Reg.szDbName));

if ( IsDlgItemChecked(hwnd, IDC_TM_NONE)
)
    Reg.eTxnMon = None;
else if ( IsDlgItemChecked(hwnd,
IDC_TM_MTS) )
    Reg.eTxnMon = COM;

iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);

ShowWindow(hwnd, SW_HIDE);
hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
ShowWindow(hDlg, SW_SHOWNA);
UpdateDialog(hDlg);

// check to see if the web services are
running
bSvcRunning = CheckWWWebService();
if ( bSvcRunning )
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Stopping Web Service.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    StopWWWebService();
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
}

```

```

// write binaries to inetpub\wwwroot
rc = CopyFiles(hDlg, szDllPath,
szWindowsPath);
if ( !rc )
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error(s)
occurred when creating " );
    strcat( szErrTxt, szLastFileName
);
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// while we have the web services shutdown,
check to see if this
// is IIS6. If it is, then call
ConfigureIIS6
if ( iIISMajorVersion == 6 )
{
    ConfigureIIS6(hwnd, hDlg);
}

//if we stopped service restart it.
if ( bSvcRunning )
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Starting Web Service.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    StartWWWService();
}

// update registry
SetDlgItemText(hDlg, IDC_STATUS, "Updating
Registry.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
WriteRegistrySettings(szDllPath);

// register com proxy stub
strcpy(szFullName, szDllPath);
strcat(szFullName, "tpcc_com_ps.dll");
if (!RegisterDLL(szFullName))
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error occurred
when registering " );
    strcat( szErrTxt, szFullName );
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// if using COM
if (Reg.eTxnMon == COM)

```

```

{
    SetDlgItemText(hDlg, IDC_STATUS,
"Configuring COM.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    if (install_com(szDllPath))
    {
        ShowWindow(hwnd,
SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt,
"Error occurred when configuring COM settings." );
        MessageBox(hwnd,
szErrTxt, NULL, MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
    Sleep(100);
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    EndDialog(hwnd, rc);
    return;
}

static void ReadRegistrySettings(void)
{
    HKEY hKey;
    DWORD size;
    DWORD type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\InetStp", 0, KEY_READ, &hKey)
== ERROR_SUCCESS )
    {
        size = sizeof(iIISMajorVersion);
        if ( RegQueryValueEx(hKey,
"MajorVersion", 0, &type, (char *)&iIISMajorVersion,
&size) == ERROR_SUCCESS )
            if ( !iIISMajorVersion
)
                iIISMajorVersion = 5;
        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\Services\Inetinfo\Parameters",
0, KEY_READ, &hKey) == ERROR_SUCCESS )
            {
                if ( iIISMajorVersion == 6 )
                {
                    // since IIS6 handles
                    // the pool thread parameters differently, we need to
                    // fill in the dialog
                    // with the
                    MaxPoolThreads rather than PoolThreadLimit
                }
            }
    }
}

```

```

// for ease of coding,
we are just going to stuff the value into
iPoolThreadLimit
size = sizeof(iPoolThreadLimit);
if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
    if ( !iPoolThreadLimit
)

iPoolThreadLimit = iMaxPhysicalMemory * 2;
}
else
{
    size =
sizeof(iPoolThreadLimit);
    if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
        if ( !iPoolThreadLimit
)

iPoolThreadLimit = iMaxPhysicalMemory * 2;
}

size = sizeof(iThreadTimeout);
if ( RegQueryValueEx(hKey,
"ThreadTimeout", 0, &type, (char *)&iThreadTimeout,
&size) == ERROR_SUCCESS )
    if ( !iThreadTimeout )
        iThreadTimeout = 86400;

size = sizeof(iListenBackLog);
if ( RegQueryValueEx(hKey,
"ListenBackLog", 0, &type, (char *)&iListenBackLog,
&size) == ERROR_SUCCESS )
    if ( !iListenBackLog )
        iListenBackLog = 15;

RegCloseKey(hKey);
}

if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\services\W3SVC\Parameters",
0, KEY_READ, &hKey) == ERROR_SUCCESS )
{
    size =
sizeof(iAcceptExOutstanding);
    if ( RegQueryValueEx(hKey,
"AcceptExOutstanding", 0, &type, (char *)
&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
        if (
!iAcceptExOutstanding )
            iAcceptExOutstanding = 40;
    RegCloseKey(hKey);
}
if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\services\HTTP\Parameters",
0, KEY_READ, &hKey) == ERROR_SUCCESS )

```

```

{
    size = sizeof(iUriEnableCache);
    if ( RegQueryValueEx(hKey,
    "UriEnableCache", 0, &type, (char *)&iUriEnableCache,
    &size) == ERROR_SUCCESS )
        if ( !iUriEnableCache )

    iUriEnableCache = 0;

    size =
    sizeof(iUriScavengerPeriod);
    if ( RegQueryValueEx(hKey,
    "UriScavengerPeriod", 0, &type, (char *)
    *&iUriScavengerPeriod, &size) == ERROR_SUCCESS )
        if (
    !iUriScavengerPeriod )

    iUriScavengerPeriod = 10800;

    size = sizeof(iMaxConnections);
    if ( RegQueryValueEx(hKey,
    "MaxConnections", 0, &type, (char *)&iMaxConnections,
    &size) == ERROR_SUCCESS )
        if ( !iMaxConnections )

    iMaxConnections = 100000;

    RegCloseKey(hKey);
}

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY hKey;
    DWORD dwDisposition;
    char szTmp[256];
    char *ptr;
    int iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
    "SOFTWARE\\Microsoft\\TPCC", 0, NULL,
    REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
    &dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0,
        REG_SZ, szTmp, strlen(szTmp)+1);

        RegSetValueEx(hKey,
        "NumberOfDeliveryThreads", 0, REG_DWORD, (char
        *)&Reg.dwNumberOfDeliveryThreads,
        sizeof(Reg.dwNumberOfDeliveryThreads));
        RegSetValueEx(hKey,
        "MaxConnections", 0, REG_DWORD, (char
        *)&Reg.dwMaxConnections,
        sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hKey,
        "MaxPendingDeliveries", 0, REG_DWORD, (char
        *) &Reg.dwMaxPendingDeliveries,
        sizeof(Reg.dwMaxPendingDeliveries));
    }
}

    RegSetValueEx(hKey,
    "DB_Protocol", 0, REG_SZ,
    szDBNames[Reg.eDB_Proto], strlen(szDBNames[Reg.eDB_Proto])+1);
    RegSetValueEx(hKey, "TxnMonitor",
    0, REG_SZ, szTxnMonNames[Reg.eTxnMon],
    strlen(szTxnMonNames[Reg.eTxnMon])+1);
    RegSetValueEx(hKey, "DbServer",
    0, REG_SZ, Reg.szDbServer, strlen(Reg.szDbServer)+1);
    RegSetValueEx(hKey, "DbName", 0,
    REG_SZ, Reg.szDbName, strlen(Reg.szDbName)+1);
    RegSetValueEx(hKey, "DbUser", 0,
    REG_SZ, Reg.szDbUser, strlen(Reg.szDbUser)+1);
    RegSetValueEx(hKey, "DbPassword",
    0, REG_SZ, Reg.szDbPassword,
    strlen(Reg.szDbPassword)+1);

    strcpy(szTmp, "YES");
    RegSetValueEx(hKey,
    "COM_SinglePool", 0, REG_SZ, szTmp, strlen(szTmp)+1);

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
{
    // if this is IIS6, then we need
    // to treat the PoolThreadLimit differently
    // if IIS6, then PoolThreadLimit
    is the maximum number of threads for the entire
    system.
    // IIS6 added MaxPoolThreads
    which controls the number of threads per processor.
    For IIS6
    // we will set MaxPoolThreads to
    the value the user provided in the dialog and then
    set
    // PoolThreadLimit to
    MaxPoolThreads * number of processors on this system
    if ( iIISMajorVersion == 6 )
    {
        iMaxPoolThreads =
        iPoolThreadLimit;
        iPoolThreadLimit =
        iMaxPoolThreads * iNumberOfProcessors;
        RegSetValueEx(hKey,
        "PoolThreadLimit", 0, REG_DWORD, (char
        *)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
        RegSetValueEx(hKey,
        "MaxPoolThreads", 0, REG_DWORD, (char
        *)&iMaxPoolThreads, sizeof(iMaxPoolThreads));
    }
    else
}
}

    RegSetValueEx(hKey,
    "PoolThreadLimit", 0, REG_DWORD, (char
    *)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
}

    RegSetValueEx(hKey,
    "ThreadTimeout", 0, REG_DWORD, (char
    *)&iThreadTimeout, sizeof(iThreadTimeout));
    RegSetValueEx(hKey,
    "ListenBackLog", 0, REG_DWORD, (char
    *)&iListenBackLog, sizeof(iListenBackLog));

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
{
    RegSetValueEx(hKey,
    "AcceptExOutstanding", 0, REG_DWORD, (char
    *)&iAcceptExOutstanding,
    sizeof(iAcceptExOutstanding));

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETRANGE, 0, MAKELPARAM(0, 13));
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC lpDllEntryPoint;
    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib,
    "DllRegisterServer");
    if ( lpDllEntryPoint != NULL )
    {
}
}

```

```

        return ((*lpDllEntryPoint)() ==
S_OK);
    }
    else
        return FALSE; //unable to
locate entry point
}

BOOL FileFromResource( char *szResourceName, int
iResourceId, char *szDllPath, char *szFileName )
{
    HGLOBAL hDLL;
    HRSRC hResInfo;
    HANDLE hFile;
    DWORD dwSize;
    BYTE *pSrc;
    DWORD d;
    char szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( ! (hFile = CreateFile(szFullName,
GENERIC_WRITE, 0, NULL, CREATE_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d,
NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath)
{
    SetDlgItemText(hDlg, IDC_STATUS, "Copying
Files..."); // install MSVCR71.DLL
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    strcpy( szLastFileName, "msvcr71.dll" );
    if (!FileFromResource( "MSVCR71",
IDR_MSVC71, szWindowsPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_odbc.dll
    strcpy( szLastFileName, "tpcc_odbc.dll" );
    if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com.dll
    strcpy( szLastFileName, "tpcc_com.dll" );
    if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_all.tlb
    strcpy( szLastFileName, "tpcc_com_all.tlb" );
    if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_ps.dll
    strcpy( szLastFileName, "tpcc_com_ps.dll" );
    if (!FileFromResource( "COM_PS_DLL",
IDR_COMPSP_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_all.dll
    strcpy( szLastFileName, "tpcc_com_all.dll" );
    if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
}

```

```

UpdateDialog(hDlg);

// install MSVCR71.DLL
strcpy( szLastFileName, "msvcr71.dll" );
if (!FileFromResource( "MSVCR71",
IDR_MSVC71, szWindowsPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_odbc.dll
strcpy( szLastFileName, "tpcc_odbc.dll" );
if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com.dll
strcpy( szLastFileName, "tpcc_com.dll" );
if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.tlb
strcpy( szLastFileName, "tpcc_com_all.tlb" );
if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_ps.dll
strcpy( szLastFileName, "tpcc_com_ps.dll" );
if (!FileFromResource( "COM_PS_DLL",
IDR_COMPSP_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.dll
strcpy( szLastFileName, "tpcc_com_all.dll" );
if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
}

```

```

return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    int iRc;

    // Registry key
    HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\InetStp\PathWWW
Root is used to find the
// IIS default web site directory and
determine that IIS is installed.

szDllPath[0] = 0;
bRc = TRUE;
if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\InetStp", 0, KEY_ALL_ACCESS,
&hKey) == ERROR_SUCCESS )
{
    sv = sizeof(szData);
    iRc = RegQueryValueEx( hKey,
"PathWWWRoot", NULL, NULL, szData, &sv ); // used by
IIS 5.0 & 6.0
    if (iRc == ERROR_SUCCESS)
    {
        bRc = FALSE;
        strcpy(szDllPath,
szData);
        len =
strlen(szDllPath);
        if ( szDllPath[len-1]
!= '\\' )
        {
            szDllPath[len] = '\\';
            szDllPath[len+1] = 0;
        }
    }
    RegCloseKey(hKey);
}

return bRc;
}

static BOOL GetWindowsInstallPath(char
*szWindowsPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    int iRc;
}

```

```

    // Registry key
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows
NT\CurrentVersion\SystemRoot is used to find the
// system root to install the VC70 DLL.

    szWindowsPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\Windows NT\CurrentVersion", 0,
KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey,
"SystemRoot", NULL, NULL, szData, &sv );
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szWindowsPath,
szData);
            len =
strlen(szWindowsPath);
            if ( szWindowsPath[len-
1] != '\\' )
            {
                szWindowsPath[len] = '\\';
                szWindowsPath[len+1] = 0;
            }
            // now append the path
to SYSTEM32
            strcat(szWindowsPath,
"SYSTEM32\\");
        }
        RegCloseKey(hKey);
    }
    return bRc;
}

static void GetVersionInfo(char *szDLLPath, char
*szExePath)
{
    DWORD
    dwSize;
    dwSize;
    dwSize;
    dwSize;
    dwBytes;
    char
    *ptr;
    VS_FIXEDFILEINFO      *vs;

    versionDllMS = 0;
    versionDllLS = 0;
    if ( _access(szDLLPath, 00) == 0 )
    {
        dwSize =
GetFileVersionInfoSize(szDLLPath, &d);
        if ( dwSize )
        {
            ptr = (char
*) malloc(dwSize);

```

```

        GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
        VerQueryValue(ptr,
"\\",&vs, &dwBytes);
        versionDllMS = vs-
>dwProductVersionMS;
        versionDllLS = vs-
>dwProductVersionLS;
        free(ptr);
    }
    versionExeMS = 0x7FFF;
    versionExeLS = 0x7FFF;
    dwSize = GetFileVersionInfoSize(szExePath,
&d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szExePath, 0,
dwSize, ptr);
        VerQueryValue(ptr, "\\",&vs,
&dwBytes);
        versionExeMS = vs-
>dwProductVersionMS;
        versionExeLS = LOWORD(vs-
>dwProductVersionLS);
        versionExeMM = HIWORD(vs-
>dwProductVersionLS);
        free(ptr);
    }
    return;
}

static BOOL CheckWWWService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;
    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;
    if ( !QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;
    if ( !ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )
        goto ServiceNotRunning;
    //start Service pending, Check the status
until the service is running.
    if ( !QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;
    CloseServiceHandle(schService);

```

```

    return TRUE;
}

ServiceNotRunning:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StartWWWService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;
    DWORD             dwOldCheckPoint;
    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;
    if ( !StartService(schService, 0, NULL) )
        goto StartWWWErr;
    //start Service pending, Check the status
until the service is running.
    if ( !QueryServiceStatus(schService,
&ssStatus) )
        goto StartWWWErr;
    while( ssStatus.dwCurrentState !=
SERVICE_RUNNING)
    {
        dwOldCheckPoint =
ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);
        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            if ( dwOldCheckPoint >=
ssStatus.dwCheckPoint )
                //Break if
the checkpoint has not been incremented.
                break;
        if ( ssStatus.dwCurrentState ==
SERVICE_RUNNING)
            goto StartWWWErr;
        CloseServiceHandle(schService);
        return TRUE;
    }
    StartWWWErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWService(void)
```

```

{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
        SC_MANAGER_ALL_ACCESS);
    //schService = OpenService(schSCManager,
    TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    schService = OpenService(schSCManager,
    TEXT("IISADMIN"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWBErr;

    if ( !ControlService(schService,
    SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWBErr;
    //start Service pending, Check the status
    until the service is running.
    if (!QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWBErr;
    while( ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
    {

        dwOldCheckPoint =
    ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
    !QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
    ssStatus.dwCheckPoint) //Break if
        the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
        goto StopWWWBErr;

    CloseServiceHandle(schService);
    return TRUE;

StopWWWBErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

```

```

        UpdateWindow(hDlg);
        while( PeekMessage(&msg, hDlg, 0, 0,
    PM_REMOVE) )
        {
            TranslateMessage(&msg);
            DispatchMessage(&msg);
        }
        Sleep(250);
        return;
}

static void ConfigureIIS6(HWND hwnd, HWND hDlg)
{
    int irc;
    char szErrTxt[128];
    FILE *fErrorFile;

    SetDlgItemText(hDlg, IDC_STATUS,
    "Configuring IIS6... ");
    //SendDlgItemMessage(hDlg, IDC_PROGRESS1,
    PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    irc = system("IIS6_CONFIG.CMD");

    // since the return code from the command
    file is always 1,
    // check to see if the file iis6_config.err
    exists
    // if it does, then something hosed
    fErrorFile = fopen("IIS6_CONFIG.err","r");
    if ( fErrorFile != NULL )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "IIS6
configuration error." );
        strcat( szErrTxt, "Check
iis6_config.err" );
        MessageBox(hwnd, szErrTxt, NULL,
    MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
}

```

install.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//
#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TCFCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108

```

```

#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003
#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_ODBC 1022
#define IDC_CONNECT_POOL 1023
#define ED_USER_CONNECT_DELAY_TIME 1024

// Next default values for new objects
//
```

install.rc

```

// Microsoft Visual C++ generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
/////////////
////
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

/////////////
////
#undef APSTUDIO_READONLY_SYMBOLS
/////////////
////
// English (U.S.) resources

```

```

#ifndef !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#endif _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

////////// Dialog
// Dialog
// 

IDD_DIALOG1 DIALOGEX 0, 0, 219, 324
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_MINIMIZEBOX | WS_POPUP |
WS_CAPTION | WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif", 0, 0, 0x1
BEGIN
    EDITTEXT     ED_THREADS,164,45,34,12,ES_RIGHT
    | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT
    ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT
    ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    CONTROL
    "None", IDC_TM_NONE, "Button", BS_AUTORADIOBUTTON |
    WS_GROUP |
    WS_TABSTOP,43,104,33,10
    CONTROL
    "COM", IDC_TM_MTS, "Button", BS_AUTORADIOBUTTON | WS_TABSTOP,94,104,32,10
    EDITTEXT
    ED_DB_SERVER,131,145,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_DB_USER_ID,131,158,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_DB_PASSWORD,131,171,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_DB_NAME,131,184,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_IIS_MAX_THREAD_POOL_LIMIT,164,226,34,12,ES_RIGHT | ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT
    ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,164,240,34,12,ES_RI
    GHT |
    WS_NUMBER,WS_EX_RTLREADING
    EDITTEXT
    ED_IIS_THREAD_TIMEOUT,164,254,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT
    ED_IIS_LISTEN_BACKLOG,164,268,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    DEFPUSHBUTTON "OK",IDOK,53,296,50,14
    PUSHBUTTON "Cancel",IDCANCEL,119,296,50,14
    EDITTEXT
    IDC_PATH,106,26,91,13,ES_AUTOHSCROLL | ES_READONLY

```

```

LTEXT          "Number of Delivery
Threads:", IDC_STATIC,35,45,115,12
    LTEXT          "Max Number of
Connections:", IDC_STATIC,35,73,115,12
        RTEXT          "Version
4.11", IDC_VERSION,120,4,89,9
        LTEXT          "IIS Max Thread Pool
Limit:", IDC_STATIC,36,226,115,12
        LTEXT          "Web Service Backlog Queue
Size:", IDC_STATIC,36,240,115,
        12
        LTEXT          "IIS Thread Timeout
(seconds):", IDC_STATIC,36,254,115,12
        LTEXT          "IIS Listen
Backlog:", IDC_STATIC,36,270,115,10
        LTEXT          "Installation
directory:", IDC_STATIC,35,29,71,10
        GROUPBOX      "Transaction
Monitor", IDC_STATIC,33,90,165,33
        LTEXT          "Server
Name:", IDC_STATIC,35,148,56,8
        LTEXT          "User ID:", IDC_STATIC,35,161,60,8
        LTEXT          "User
Password:", IDC_STATIC,35,174,83,8
        LTEXT          "Database
Name:", IDC_STATIC,35,187,54,8
        GROUPBOX      "SQL Server Connection
Properties", IDC_STATIC,22,132,187,
        74
        GROUPBOX      "Web Client
Properties", IDC_STATIC,22,15,187,113
        GROUPBOX      "IIS
Settings", IDC_STATIC,22,210,187,79
        LTEXT          "Max Pending
Deliveries:", IDC_STATIC,35,59,115,12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFONT | DS_SETBACKGROUND | DS_3DLOOK |
DS_CENTER | WS_POPUP |
WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON "OK",IDOK,33,45,50,9
    CTEXT          "HTML TPC-C Installation
Successfull", IDC_RESULTS,7,22,
    102,18,0,WS_EX_CLIENTEDGE
    ICON
IDI_ICON2, IDC_STATIC,50,7,18,20,SS_REALSIZEIMAGE,
    WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG 0, 0, 91, 40
STYLE DS_SYSMODAL | DS_SETFONT | DS_MODALFRAME |
DS_3DLOOK | DS_CENTER |
WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL
    "Progress1", IDC_PROGRESS1,"msctls_progress32",WS_BORD
ER,

```

```

    7,20,77,13
    CTEXT
    "Static", IDC_STATUS,7,7,77,12,SS_SUNKEN
END

IDD_DIALOG4 DIALOG 0, 0, 291, 202
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT
    IDC_LICENSE,7,7,271,167,ES_MULTILINE | ES_AUTOVSCROLL
    | ES_AUTOHSCROLL | ES_READONLY |
    WS_VSCROLL | WS_HSCROLL
    DEFPUSHBUTTON "I &Agree",IDOK,87,181,50,14
    PUSHBUTTON "&Cancel",IDCANCEL,153,181,50,14
END

////////// DESIGNINFO
// DESIGNINFO
// 

#ifndef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 318
    END

    IDD_DIALOG2, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 109
        TOPMARGIN, 7
        BOTTOMMARGIN, 54
    END

    IDD_DIALOG3, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 84
        TOPMARGIN, 7
        BOTTOMMARGIN, 33
    END

    IDD_DIALOG4, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 278
        TOPMARGIN, 7
        BOTTOMMARGIN, 195
    END

```

```

        END
    endif // APSTUDIO_INVOKED

    #ifdef APSTUDIO_INVOKED
    ///////////////////////////////////////////////////
    // TEXTINCLUDE
    //

    1 TEXTINCLUDE
    BEGIN
        "resource.h\0"
    END

    2 TEXTINCLUDE
    BEGIN
        "#include \"afxres.h\"\r\n"
        "\0"
    END

    3 TEXTINCLUDE
    BEGIN
        "\r\n"
        "\0"
    END

    #endif // APSTUDIO_INVOKED

    ///////////////////////////////////////////////////
    // Icon
    //

    // Icon with lowest ID value placed first to ensure
    application icon
    // remains consistent on all systems.
IDI_ICON1      ICON
"icon1.ico"
IDI_ICON2      ICON
"icon2.ico"

    ///////////////////////////////////////////////////
    // TPCCDLL
    //

IDR_TPCCDLL     TPCCDLL
"..\\..\\isapi_dll\\bin\\tpcc.dll"

    ///////////////////////////////////////////////////
    // Version
    //

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,50,0

```

```

        PRODUCTVERSION 0,4,50,0
        FILEFLAGSMASK 0x3fL
#ifndef _DEBUG
        FILEFLAGS 0x1L
#else
        FILEFLAGS 0x0L
#endif
        FILEOS 0x40004L
        FILETYPE 0x1L
        FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C Web Client
Installer"
            VALUE "CompanyName", "Microsoft"
            VALUE "FileDescription", "install"
            VALUE "FileVersion", "0, 4, 20, 0"
            VALUE "InternalName", "install"
            VALUE "LegalCopyright", "Copyright ©
1999"
            VALUE "OriginalFilename", "install.exe"
            VALUE "ProductName", "Microsoft install"
            VALUE "ProductVersion", "0, 4, 20, 0"
        END
        BLOCK "VarFileInfo"
        BEGIN
            VALUE "Translation", 0x409, 1200
        END
    END
    ///////////////////////////////////////////////////
    // LICENSE
    //

IDR_LICENSE1      LICENSE
"license.txt"

    ///////////////////////////////////////////////////
    // ODBC_DLL
    //

IDR_ODBC_DLL      ODBC_DLL
"..\\..\\db_odbc_dll\\bin\\Release\\tpcc_odbc.dll"

    ///////////////////////////////////////////////////
    // COM_DLL
    //

IDR_COM_DLL       COM_DLL
"..\\..\\tm_com_dll\\bin\\tpcc_com.dll"

```

```

    ///////////////////////////////////////////////////
    // COM_PS_DLL
    //

IDR_COMPS_DLL     COM_PS_DLL
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.dll"

    ///////////////////////////////////////////////////
    // COM_ALL_DLL
    //

IDR_COMALL_DLL    COM_ALL_DLL
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.dll"

    ///////////////////////////////////////////////////
    // COM_TYPLIB
    //

IDR_COMTYPLIB_DLL COM_TYPLIB
"..\\..\\tpcc_com_all\\src\\tpcc_com_all.tlb"

    ///////////////////////////////////////////////////
    // MSVCR71
    //

IDR_MSVCR71       MSVCR71
"C:\\WINDOWS\\system32\\msvcr71.dll"
#endif // English (U.S.) resources
    ///////////////////////////////////////////////////
    // Generated from the TEXTINCLUDE 3 resource.
    //

    ///////////////////////////////////////////////////
    // not APSTUDIO_INVOKED
#endif // not APSTUDIO_INVOKED

```

install_com.cp

p

```

/*      FILE:      INSTALL_COM.CPP
*           Microsoft
TPC-C Kit Ver. 4.51.000

```

```

/*
Microsoft, 1999          Copyright
*                  All Rights Reserved
*
*                               not audited
*
* PURPOSE: installation code for COM
application for TPC-C Web Kit
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
*        4.20.000 - first version
*/
#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp
= NULL;
    ICatalogCollection* pCatalogCollectionCo
= NULL;
    ICatalogCollection* pCatalogCollectionItf
= NULL;
    ICatalogCollection* pCatalogCollectionMethod
= NULL;

    ICatalogObject*
pCatalogObjectApp     = NULL;
    ICatalogObject*
pCatalogObjectCo      = NULL;
    ICatalogObject*
pCatalogObjectItf     = NULL;
    ICatalogObject*
pCatalogObjectMethod   = NULL;

    _bstr_t
bstrTemp, bstrTemp2, bstrTemp3, bstrTemp4;
    _bstr_t
bstrDllPath = szDllPath;
    _variant_t
vTmp, vKey;
    long
lActProp, lCount, lCountCo, lCountItf,
lCountMethod;
    bool
bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);
}

```

```

    HRESULT hr =
CoCreateInstance(CLSID_COMAdminCatalog,
NULL,
CLCTX_INPROC_SERVER,
IID_ICOMAdminCatalog,
(void**) &pCOMAdminCat);

if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Applications";

// Attempt to connect to "Applications" in
the Catalog
hr = pCOMAdminCat->GetCollection(bstrTemp,
(IDispatch**) &pCatalogCollectionApp);
if (!SUCCEEDED(hr)) goto Error;

// Attempt to load the "Applications"
collection
hr = pCatalogCollectionApp->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionApp-
>get_Count(&lCount);
if (!SUCCEEDED(hr)) goto Error;

// iterate through applications to delete
existing "TPC-C" application (if any)
while (lCount > 0)
{
    hr = pCatalogCollectionApp-
>get_Item(lCount - 1, (IDispatch**) &pCatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogObjectApp-
>get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    if (wcscmp(vTmp.bstrVal, L"TPC-
C"))
    {
        lCount--;
        continue;
    }
    else
    {
        hr =
pCatalogCollectionApp->Remove(lCount - 1);
        if (!SUCCEEDED(hr))
        goto Error;
        break;
    }
}

```

```

    hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

// add the new application
hr = pCatalogCollectionApp-
>Add((IDispatch**) &CatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

// set properties
bstrTemp = "Name";
vTmp = "TPC-C";
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set as a library (in process)
application
bstrTemp = "Activation";
lActProp = COMAdminActivationInproc;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set security level to process
bstrTemp = "AccessChecksLevel";
lActProp =
COMAdminAccessChecksApplicationLevel;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// save key to get the Components
collection later
hr = pCatalogObjectApp->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

// save changes (app creation) so component
installation will work
hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectApp->Release();
pCatalogObjectApp = NULL;

bstrTemp = "TPC-C";
// app name
bstrTemp2 = bstrDllPath +
"tpcc_com_all.dll"; // DLL
bstrTemp3 = bstrDllPath +
"tpcc_com_all.tlb"; // type library (TLB)
bstrTemp4 = bstrDllPath +
"tpcc_com_ps.dll"; // proxy/stub dll

hr = pCOMAdminCat-
>InstallComponent(bstrTemp,
bstrTemp2,

```

```

        bstrTemp3,
        bstrTemp4;
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "Components";
        hr = pCatalogCollectionApp-
>GetCollection(bstrTemp, vKey, (IDispatch**)&pCatalogCollectionCo);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo->Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo-
>get_Count(&lCountCo);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through components in
        application and set the properties
        while (lCountCo > 0)
        {
            hr = pCatalogCollectionCo-
>get_Item(lCountCo - 1, (IDispatch**)&pCatalogObjectCo);
            if (!SUCCEEDED(hr)) goto Error;

            // used for debugging (view the
            name)
            hr = pCatalogObjectCo-
>get_Name(&vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructionEnabled";
            bTmp = TRUE;
            vTmp = bTmp;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructorString";
            bstrTemp2 = "dummy string (do not
remove)";
            vTmp = bstrTemp2;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp =
"JustInTimeActivation";
            bTmp = TRUE;
            vTmp = bTmp;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "MaxPoolSize";

```

```

                vTmp.Clear();           // clear
                variant so it isn't stored as a bool (_variant_t
                feature)
                vTmp = (long)30;
                hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
                if (!SUCCEEDED(hr)) goto Error;

                bstrTemp =
"ObjectPoolingEnabled";
                bTmp = TRUE;
                vTmp = bTmp;
                hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
                if (!SUCCEEDED(hr)) goto Error;

                // save key to get the
                InterfacesForComponent collection
                hr = pCatalogObjectCo-
>get_Key(&vKey);
                if (!SUCCEEDED(hr)) goto Error;

                bstrTemp =
"InterfacesForComponent";
                hr = pCatalogCollectionCo-
>GetCollection(bstrTemp, vKey, (IDispatch**)&pCatalogCollectionItf);
                if (!SUCCEEDED(hr)) goto Error;

                hr = pCatalogCollectionItf-
>Populate();
                if (!SUCCEEDED(hr)) goto Error;

                hr = pCatalogCollectionItf-
>get_Count(&lCountItf);
                if (!SUCCEEDED(hr)) goto Error;

                // iterate through interfaces in
                component
                while (lCountItf > 0)
                {
                    hr =
pCatalogCollectionItf->get_Item(lCountItf - 1,
(IDispatch**)&pCatalogObjectItf);
                    if (!SUCCEEDED(hr))
                    goto Error;

                    // save key to get the
                    MethodsForInterface collection
                    hr = pCatalogObjectItf-
>get_Key(&vKey);
                    if (!SUCCEEDED(hr))
                    goto Error;

                    bstrTemp =
"MethodsForInterface";
                    hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey,
(IDispatch**)&pCatalogCollectionMethod);
                    if (!SUCCEEDED(hr))
                    goto Error;

```

```

                    hr =
pCatalogCollectionMethod->Populate();
                    if (!SUCCEEDED(hr))
                    goto Error;

                    hr =
pCatalogCollectionMethod->get_Count(&lCountMethod);
                    if (!SUCCEEDED(hr))
                    goto Error;

                    // iterate through
                    methods of interface
                    while (lCountMethod >
0)
                    {
                        hr =
pCatalogCollectionMethod->get_Item(lCountMethod - 1,
(IDispatch**)&pCatalogObjectMethod);
                        if
(!SUCCEEDED(hr)) goto Error;

                        bstrTemp =
"AutoComplete";
                        bTmp = TRUE;
                        vTmp = bTmp;
                        hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
                        if
(!SUCCEEDED(hr)) goto Error;

                        pCatalogObjectMethod->Release();
                        pCatalogObjectMethod = NULL;

                        lCountMethod-
-;
                    }
                    // save changes
                    hr =
pCatalogCollectionMethod->SaveChanges(&lActProp);
                    if (!SUCCEEDED(hr))
                    goto Error;

                    pCatalogObjectItf-
>Release();
                    pCatalogObjectItf =
NULL;
                    lCountItf--;
                }
                pCatalogObjectCo->Release();
                pCatalogObjectCo = NULL;
            }
            lCountCo--;
        }
    }
}

```

```

// save changes
hr = pCatalogCollectionCo->SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogCollectionApp->Release();
pCatalogCollectionApp = NULL;

pCatalogCollectionCo->Release();
pCatalogCollectionCo = NULL;

pCatalogCollectionItf->Release();
pCatalogCollectionItf = NULL;

pCatalogCollectionMethod->Release();
pCatalogCollectionMethod = NULL;

Error:
    CoUninitialize();

    if (!SUCCEEDED(hr))
    {
        LPTSTR lpBuf;
        DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER |  

FORMAT_MESSAGE_FROM_SYSTEM,  

NULL,  

hr,  

MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),  

(LPTSTR)  

&lpBuf,  

0,  

NULL);
//             _tprintf(_T("Error adding  

components. HRESULT: 0x%x\n%s"), hr, lpBuf);
return TRUE;
}
else
    return FALSE;
}

```

license.txt

END-USER LICENSE AGREEMENT FOR
MICROSOFT TPC-C BENCHMARK KIT

IMPORTANT READ CAREFULLY: This Microsoft End-User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and Microsoft Corporation for the Microsoft software product identified above, which includes computer software and may

include associated media, printed materials, and online or electronic documentation (SOFTWARE PRODUCT). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA.
If you do not agree to the terms of this Agreement, you are not authorized to use the SOFTWARE PRODUCT.

The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE. This EULA grants you the following rights:

Use. Microsoft grants to you the right to install and use copies of the SOFTWARE PRODUCT only in conjunction with validly licensed copies of Microsoft SQL Server and/or Microsoft Windows NT Server software. You may also make copies of the SOFTWARE PRODUCT for backup and archival purposes.

2. RESTRICTIONS.

--You must maintain all copyright notices on all copies of the SOFTWARE PRODUCT.
--You may not distribute copies of the SOFTWARE PRODUCT to third parties.
--You may not rent, lease or lend the SOFTWARE PRODUCT.
--You may not use the SOFTWARE PRODUCT or any derivative works thereof to internally test database management system software other than Microsoft SQL Server and/or operating system software other than Microsoft Windows NT.

-- You may not disclose the results of any benchmark tests using the SOFTWARE PRODUCT to any third party without Microsoft's prior written approval.
-- You may not disclose or provide the SOFTWARE PRODUCT or any derivative works thereof, or any information relating to the SOFTWARE PRODUCT (including the existence of the SOFTWARE PRODUCT or the results of use and testing or benchmark testing), to any third party without Microsoft's written permission.

3. TERMINATION. Without prejudice to any other rights, Microsoft may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT.

4. COPYRIGHT. All title and copyrights in and to the

SOFTWARE PRODUCT and any copies thereof are owned by Microsoft or its suppliers. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT is the property of the respective content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants you no rights to use such content.

5. UPGRADES. If the SOFTWARE PRODUCT is labeled as an upgrade, you must be properly licensed to use a product identified by Microsoft as being eligible for the upgrade in order to use the SOFTWARE PRODUCT. A SOFTWARE PRODUCT labeled as an upgrade replaces and/or supplements the product that formed the basis for your eligibility for the upgrade. You may use the resulting upgraded product only in accordance with the terms of this EULA.

6. U.S. GOVERNMENT RESTRICTED RIGHTS.

The SOFTWARE PRODUCT is provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c) (1) and (2) of the Commercial Computer Software Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, WA 98052-6399.

7. EXPORT RESTRICTIONS.

You agree that you will not export or re-export the SOFTWARE PRODUCT to any country, person, entity or end user subject to U.S.A. export restrictions. Restricted countries currently include, but are not necessarily limited to Cuba, Iran, Iraq, Libya, North Korea, Syria, and the Federal Republic of Yugoslavia (Serbia and Montenegro, U.N. Protected Areas and areas of Republic of Bosnia and Herzegovina under the control of Bosnian Serb forces). You warrant and represent that neither the U.S.A. Bureau of Export Administration nor any other federal agency has suspended, revoked or denied your export privileges.

8. NO WARRANTY. ANY USE OF THE SOFTWARE PRODUCT IS AT YOUR OWN RISK. THE SOFTWARE PRODUCT IS PROVIDED FOR USE ONLY WITH MICROSOFT SQL SERVER AND/OR MICROSOFT WINDOWS NT SERVER SOFTWARE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MICROSOFT AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT.

9. NO LIABILITY FOR CONSEQUENTIAL DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL MICROSOFT OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT, EVEN IF MICROSOFT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

10. LIMITATION OF LIABILITY. MICROSOFT'S ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY UNDER THIS EULA SHALL NOT EXCEED FIVE DOLLARS (US\$5.00).

11. MISCELLANEOUS

This EULA is governed by the laws of the State of Washington, U.S.A. Should you have any questions concerning this EULA, or if you desire to contact Microsoft for any reason, please contact the Microsoft subsidiary serving your country, or write: Microsoft Sales Information Center/One Microsoft Way/Redmond, WA 98052-6399.

Si vous avez acquis votre produit Microsoft au CANADA, la garantie limitée suivante vous concerne:

EXCLUSION DE GARANTIES. Microsoft renonce entièrement ... toute garantie pour le LOGICIEL. Le LOGICIEL et toute autre documentation s'y rapportant sont fournis ® comme tels - sans aucune garantie quelle qu'elle soit, expresse ou implicite, y compris, mais ne se limitant pas aux garanties implicites de la qualité, marchandise ou un usage

particulier. Le risque total d'écoulement de l'utilisation ou de la performance du LOGICIEL est entre vos mains.

RESPONSABILITÉ LIMITÉE. La seule obligation de Microsoft et votre recours exclusif concernant ce contrat n'excéderont pas cinq dollars (US\$5.00).

ABSENCE DE RESPONSABILITÉ POUR LES DOMMAGES INDIRECTS. Microsoft ou ses fournisseurs ne pourront être tenus responsables en aucune circonstance de tout dommage quel qu'il soit (y compris mais non de façon limitative les dommages directs ou indirects causés par la perte de biens, commerciaux, l'interruption des affaires, la perte d'information commerciale ou toute autre perte financière), résultant de l'utilisation ou de l'impossibilité d'utilisation de ce produit, et ce, même si la société, Microsoft a été avisée de l'éventualité de tels dommages. Certains états/juridictions ne permettent pas l'exclusion ou la limitation de responsabilité relative aux dommages indirects ou consécutifs, et la limitation ci-dessus peut ne pas s'appliquer à votre état. La présente Convention est régie par les lois de la province d'Ontario, Canada.

Chacune des parties à la présente reconnaît irrégulièrement la compétence des tribunaux de la province d'Ontario et consent à instituer tout litige qui pourrait découler de la présente auprès des tribunaux situés dans le district judiciaire de York, province d'Ontario. Au cas où vous auriez des questions concernant cette licence ou que vous désiriez nous mettre en rapport avec Microsoft pour quelque raison que ce soit, veuillez contacter la succursale Microsoft desservant votre pays, dont l'adresse est fournie dans ce produit, ou, si nécessaire, Microsoft Customer Sales and Service, One Microsoft Way, Redmond, Washington 98052-6399.

Methods.h

/* FILE: METHODS.H

Microsoft
Copyright
Microsoft, 1999
* All Rights Reserved
* not yet
audited
* PURPOSE: Header file for COM components.
* Change history:
* 4.20.000 - first version
*/

enum COMPONENT_ERROR
{
 ERR_MISSING_REGISTRY_ENTRIES = 1,
 ERR_LOADDLL_FAILED,
 ERR_GETPROCADDR_FAILED,
 ERR_UNKNOWN_DB_PROTOCOL,
 ERR_MEM_ALLOC_FAILED
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
 CCOMPONENT_ERR(COMPONENT_ERROR Err)
 {
 m_Error = Err;
 m_szTextDetail = NULL;
 m_SystemErr = 0;
 m_szErrorText = NULL;
 };

 CCOMPONENT_ERR(COMPONENT_ERROR Err, char *szTextDetail, DWORD dwSystemErr)
 {
 m_Error = Err;
 m_szTextDetail = new char[strlen(szTextDetail)+1];
 strcpy(m_szTextDetail, szTextDetail);
 m_SystemErr = dwSystemErr;
 m_szErrorText = NULL;
 };

 ~CCOMPONENT_ERR()
 {
 if (m_szTextDetail != NULL)
 delete [] m_szTextDetail;
 if (m_szErrorText != NULL)
 delete [] m_szErrorText;
 };
};
COMPONENT_ERROR m_Error;

```

        char
*m_szTextDetail;
        char
*m_szErrorText;
        DWORD
m_SystemErr;

        int ErrorType() { return
ERR_TYPE_COMPONENT;};
        char *ErrorTypeStr() { return
"COMPONENT"; }
        int ErrorNum() { return m_Error;};
        char *ErrorText();
};

static void WriteMessageToEventLog(LPTSTR lpszMsg);

/////////////////////////////////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
public ITPCC,
public IOobjectControl,
public IOobjectConstruct,
public
CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
    COM_INTERFACE_ENTRY(ITPCC)
    COM_INTERFACE_ENTRY(IOobjectControl)
    COM_INTERFACE_ENTRY(IOobjectConstruct)
END_COM_MAP()

    CTPCC_Common();
    ~CTPCC_Common();

// ITPCC
public:
    HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Delivery(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out);
    HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out);

    HRESULT __stdcall CallSetComplete();

// IOobjectControl
    STDMETHODIMP_(BOOL) CanBePooled() { return
m_bCanBePooled; }
    STDMETHODIMP Activate() { return S_OK; }
    // we don't support COM Services
transactions (no enlistment)
    STDMETHODIMP_(void) Deactivate() { /* nothing to do */ }
}

```

```

// IOBJECTCONSTRUCT
STDMETHODIMP Construct(IDispatch * pUnk);

        // helper methods
private:
    BOOL           m_bCanBePooled;
    CTPCC_BASE     *m_pTxn;

    struct COM_DATA
    {
        int         retval;
        int         error;
        union
        {
            NEW_ORDER_DATA
            PAYMENT_DATA
            DELIVERY_DATA
            STOCK_LEVEL_DATA
            ORDER_STATUS_DATA
        } u;
    };
};

/////////////////////////////////////////////////////////////////
// CTPCC
class CTPCC :
public CTPCC_Common,
public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
    //COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx<CComSingleThreadModel>)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

};

/////////////////////////////////////////////////////////////////
// CNewOrder
class CNewOrder :
public CTPCC_Common,
public CComCoClass<CNewOrder,
&CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEORDER)

BEGIN_COM_MAP(CNewOrder)

```

```

//          COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) { return E_NOTIMPL; }
    HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }

/////////////////////////////////////////////////////////////////
// COrderStatus
class COrderStatus :
public CTPCC_Common,
public CComCoClass<COrderStatus,
&CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
    //COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) { return E_NOTIMPL; }
    HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }

/////////////////////////////////////////////////////////////////
// CPayment
class CPayment :
public CTPCC_Common,
public CComCoClass<CPayment,
&CLSID_Payment>
{

```

```

{
public:
DECLARE_REGISTRY_RESOURCEID (IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
//    COM_INTERFACE_ENTRY2 (IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2 (IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

///////////////////////////////
// CStockLevel
class CStockLevel :
{
public:
    public CTPCC_Common,
    public CComCoClass<CStockLevel,
&CLSID_StockLevel>
};

DECLARE_REGISTRY_RESOURCEID (IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
//    COM_INTERFACE_ENTRY2 (IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2 (IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

ReadRegistry. cpp

```

/*      FILE:          READREGISTRY.CPP
*                               Microsoft
TPC-C Kit Ver. 4.20.000
*                               Copyright
Microsoft, 1999
*                               All Rights Reserved
*
*                               not yet
audited
*
* PURPOSE: Implementation for TPC-C class.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
*                               4.20.000 - first version
*/
/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE: This function reads the NT
registry for startup parameters. These parameters are
under the TPCC key.
*
* RETURNS FALSE = no errors
*                               TRUE = error reading
registry
*/
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
)
{
    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
        return TRUE;

    // determine database protocol to use;
always has to be ODBC
    pReg->eDB_Protocol = ODBC;
    size = sizeof(szTmp);
    //if ( RegQueryValueEx(hKey, "DB_Protocol",
0, &type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
    //{
        //if ( !strcmp(szTmp,
szDBNames[ODBC]) )
            //      pReg->eDB_Protocol =
ODBC;
    //}
    pReg->eTxnMon = None;
}

```

```

// determine txn monitor to use; may be
either COM, or blank
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "TxnMonitor", 0,
&type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
{
    if ( !strcmp(szTmp,
szTxnMonNames[COM]) )
        pReg->eTxnMon = COM;
}

pReg->bCOM_SinglePool = FALSE;
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey,
"COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, "YES") )
        pReg->bCOM_SinglePool =
TRUE;
}

pReg->dwMaxConnections = 0;
size = sizeof(dwTmp);
if ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
    && (type == REG_DWORD)
    pReg->dwMaxConnections = dwTmp;

pReg->dwMaxPendingDeliveries = 0;
size = sizeof(dwTmp);
if ( RegQueryValueEx(hKey,
"MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
    && (type == REG_DWORD)
    pReg->dwMaxPendingDeliveries =
dwTmp;

pReg->dwNumberOfDeliveryThreads = 0;
size = sizeof(dwTmp);
if ( RegQueryValueEx(hKey,
"NumberOfDeliveryThreads", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
    && (type == REG_DWORD)
    pReg->dwNumberOfDeliveryThreads =
dwTmp;

size = sizeof( pReg->szPath );
if ( RegQueryValueEx(hKey, "Path", 0,
&type, (BYTE *)&pReg->szPath, &size) != ERROR_SUCCESS
)
    pReg->szPath[0] = 0;

size = sizeof( pReg->szDbServer );
if ( RegQueryValueEx(hKey, "DbServer", 0,
&type, (BYTE *)&pReg->szDbServer, &size) !=
ERROR_SUCCESS )
    pReg->szDbServer[0] = 0;

size = sizeof( pReg->szDbName );

```

```

        if ( RegQueryValueEx(hKey, "DbName", 0,
&type, (BYTE *)&pReg->szDbName, &size) != ERROR_SUCCESS )
            pReg->szDbName[0] = 0;

        size = sizeof( pReg->szDbUser );
        if ( RegQueryValueEx(hKey, "DbUser", 0,
&type, (BYTE *)&pReg->szDbUser, &size) != ERROR_SUCCESS )
            pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0,
&type, (BYTE *)&pReg->szDbPassword, &size) != ERROR_SUCCESS )
            pReg->szDbPassword[0] = 0;

        size = sizeof( pReg->szSPPrefix );
        if ( RegQueryValueExW(hKey, L"SPPrefix", 0,
&type, (BYTE *)&pReg->szSPPrefix, &size) != ERROR_SUCCESS )
            pReg->szSPPrefix[0] = L'\0';

        pReg->dwConnectDelay = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"ConnectDelay", 0, &type, (LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwConnectDelay = dwTmp;

        pReg->bCallNoDuplicatesNewOrder = FALSE;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"CallNoDuplicatesNewOrder", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->bCallNoDuplicatesNewOrder =
dwTmp;

        RegCloseKey(hKey);

        return FALSE;
    }

```

ReadRegistry.h

```

/*      FILE:          ReadRegistry.h
 *           Microsoft
TPC-C Kit Ver. 4.20.000
*           Copyright
Microsoft, 1999
*           All Rights Reserved
*
*           not audited
*
* PURPOSE: Header for registry related code.
*
* Change history:
*           4.20.000 - first version
*/

```

```

enum DBPROTOCOL { Unspecified, ODBC };
const char *szDBNames[] = { "Unspecified", "ODBC" };

enum TXNMON { None, COM };
const char *szTxnMonNames[] = { "NONE", "COM" };

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
    wchar_t szSPPrefix[32];
    //tpcc_odb.dll stored procedures prefix
    DWORD dwConnectDelay;           // delay in
ms to use in pacing connection open and close
    BOOL bCallNoDuplicatesNewOrder;  // whether to check for non-duplicate item ids and call
                                    // a different New Order SP
} TPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
);

```

RESOURCE.H

```

//{{NO_DEPENDENCIES}}
// Microsoft Visual C++ generated include file.
// Used by install.rc
//
#define IDD_DIALOG1          101
#define IDR_ICON1             102
#define IDR_TPCCDLL           103
#define IDD_DIALOG2           105
#define IDR_ICON2             106
#define IDR_DELIVERY          107
#define IDD_DIALOG3           108
#define IDR_LICENSE1          112
#define IDD_DIALOG4           113
#define IDR_TPCCOBJ1          117
#define IDR_TPCCSTUB1          118
#define IDR_ODBC_DLL           123
#define IDR_COM_DLL            126
#define IDR_COMPS_DLL          127
#define IDR_COMALL_DLL         128
#define IDR_COMTYPLIB_DLL       129
#define IDR_MSVC71              130
#define BN_LOG                 1001
#define ED_KEEP                1002
#define ED_THREADS              1003
#define ED_THREADS2             1004
#define IDC_PATH               1007
#define IDC_VERSION             1009

```

```

#define IDC_RESULTS           1010
#define IDC_PROGRESS1          1011
#define IDC_STATUS             1012
#define IDC_BUTTON1           1013
#define ED_MAXCONNECTION       1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_MAXDELIVERIES        1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT   1018
#define ED_IIS_LISTEN_BACKLOG    1019
#define IDC_DBLIB              1021
#define IDC_LICENSE             1022
#define IDC_ODBC                1022
#define IDC_CONNECT_POOL        1023
#define ED_DB_SERVER             1023
#define ED_USER_CONNECT_DELAY_TIME 1024
#define ED_DB_USER_ID            1024
#define IDC_MTS                  1025
#define IDC_TM_MTS              1025
#define IDC_TM_TUXEDO           1026
#define IDC_TM_NONE              1027
#define ED_DB_PASSWORD           1028
#define ED_DB_NAME                1029
#define IDC_TM_ENCINA            1030

// Next default values for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 131
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1031
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

tpcc.cpp

```

/*      FILE:          TPCC.C
*           Microsoft
TPC-C Kit Ver. 4.20.000
*           Copyright
Microsoft, 1999
*           All Rights Reserved
*
*           Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*           PURPOSE: Main module for TPCC.DLL which is
an ISAPI service dll.
*           Contact: Charles Levine
(clevine@microsoft.com)
*
*           Change history:
*           4.20.000 - reworked error
handling; added options for COM and Encina txm
monitors
*/
#include <windows.h>
#include <process.h>

```

```

#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\tmeb.h>
#include <io.h>
#include <assert.h>

#include <sqatypes.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

#include "...\\common\\src\\trans.h"
    //tpckit transaction header contains
definitions of structures specific to TPC-C
#include "...\\common\\src\\error.h"
#include "...\\common\\src\\txnbase.h"
#include "...\\common\\src\\ReadRegistry.h"

#include "...\\common\\txnlog\\include\\rtetime.h"
#include "...\\common\\txnlog\\include\\spinlock.h"
#include "...\\common\\txnlog\\include\\txnlog.h"

// Database layer includes
#include "...\\db_odbcdll\\src\\tpcc_odbch"
    // ODBC implementation of TPC-C txns

// Txn monitor layer includes
#include "...\\tm_com_dll\\src\\tpcc_com.h"
    // COM Services implementation on
TPC-C txns

#include "httpext.h"
    //ISAPI DLL information header
#include "tpcc.h"
    //this dlls specific structure, value e.t.
header.

#define LEN_ERR_STRING      256

// defines for Make<Txn>Form calls to distinguish
input and output flavors
#define OUTPUT_FORM          0
#define INPUT_FORM           1

char        szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

//Terminal client id structure
TERM      Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version
level of this web client interface.
// The RTE must be synchronized with the interface
level on login, otherwise the login

```

```

// will fail. This is a sanity check to catch
problems resulting from mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "420"

static   CRITICAL_SECTION
TermCriticalSection;

static   HINSTANCE hLibInstanceTm = NULL;
static   HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_ODBC          *pCTPCC_ODBC_new;
TYPE_CTPCC_COM            *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog
{
    *txnDelilog = NULL;
    //used to log delivery transaction
information

HANDLE
hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE
hDoneEvent = INVALID_HANDLE_VALUE;
HANDLE
*pDeliHandles = NULL;

// configuration settings from registry
TPCCREGISTRYDATA         Reg;

DWORD
dwNumDeliveryThreads = 4;
CRITICAL_SECTION
DeBuffCriticalSection;
    //critical section for delivery
transactions cache
DELIVERY_TRANSACTION       *pDelBuff
= NULL;
DWORD
dwDelBuffSize = 100;
    // size of circular buffer for delivery
txns
DWORD
dwDelBuffFreeCount;
    // number of buffers free
DWORD
dwDelBuffBusyIndex = 0;
    // index position of entry waiting to be delivered
DWORD
dwDelBuffFreeIndex = 0;
    // index position of unused entry
    // Critical section to synchronize connection open
and close.
    //
CRITICAL_SECTION hConnectCriticalSection;
#include "...\\common\\src\\ReadRegistry.cpp"
/* FUNCTION: DllMain
*/

```

```

* PURPOSE:      This function is the entry point
for the DLL. This implementation is based on the
*
fact that
DLL_PROCESS_ATTACH is only called from the inet
service once.
*
* ARGUMENTS:      HANDLE     hModule
module handle
*                                     DWORD
*             ul_reason_for_call  reason for call
*                                     LPVOID
*             lpReserved
reserved for future use
*
* RETURNS:      BOOL      FALSE
errors occurred in
initialization
*
*             TRUE
successfully initialized
*/
DLL
BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    DWORD i;
    char szEvent[LEN_ERR_STRING] = "\0";
    char szLogFile[128];
    char szDllName[128];

// debugging...
// DebugBreak();

try
{
    switch( ul_reason_for_call )
    {
        case
DLL_PROCESS_ATTACH:
        {
            DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
GetComputerName(szMyComputerName, &dwSize);
szMyComputerName[dwSize] = 0;
}

DisableThreadLibraryCalls((HMODULE)hModule);
;

InitializeCriticalSection(&TermCriticalSection);
if (
ReadTPCCRegistrySettings( &Reg ) )
    throw new CWEBCNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES);
}
}

```

```

if (pCTPCC_ODBC_new == NULL)
{
    throw new CWEBCLNT_ERR(
        ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
}

}
}

// Check
whether Service Pack 1 has been installed if
// running on
Windows Server 2003. The RTM version has
// a
limitation on concurrent HTTP connections.
//



OSVERSIONINFOEX VersionInfo;

VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
if
(GetVersionEx((LPOSVERSIONINFO)&VersionInfo))
{
    if
(VersionInfo.dwMajorVersion == 5 &&           // Windows
2000/2003 Server?
VersionInfo.dwMinorVersion == 2 &&           // Windows
2003 Server?
VersionInfo.wServicePackMajor == 0)           // /
Service Pack installed?
{
    TCHAR szMsg[256];
    _snprintf(szMsg, sizeof(szMsg),
              "\nRunning on
Windows Server 2003 without at least Service Pack
1\n"
              "limits the
number of concurrent HTTP connections to around
8000");
    // Use event logging to log the error.
    //
    HANDLE hEventSource =
RegisterEventSource(NULL, TEXT("TPCC.DLL"));
    LPTSTR lpszStrings[1] = { szMsg };
    if (hEventSource != NULL)

```

```

dwDelBuffFreeCount = dwDelBuffSize;

InitJulianTime(NULL);

// create unique log file name based on delilog-yymmdd-
hhmm.log

SYSTEMTIME Time;
GetLocalTime( &Time );
wsprintf( szLogFile, "%sdelivery-
%2.2d%2.2d-%2.2d%2.2d-%2.2dms.log",
Reg.szPath, Time.wYear % 100, Time.wMonth,
Time.wDay, Time.wHour, Time.wMinute, Time.wSecond,
Time.wMilliseconds );

txnDelilog = new CTxnLog( szLogFile,
TXN_LOG_WRITE );

// write event into txn log for START

txnDelilog-
>WriteCtrlRecToLog( TXN_EVENT_START, szMyComputerName,
sizeof( szMyComputerName ) );

// allocate structures for delivery buffers and thread
mgmt

pDeliHandles = new
HANDLE[ dwNumDeliveryThreads ];

pDelBuff = new
DELIVERY_TRANSACTION[ dwDelBuffSize ];
// launch DeliveryWorkerThread to perform actual
delivery txns

for( i=0; i<dwNumDeliveryThreads; i++ )
{
    pDeliHandles[i] = (HANDLE) _beginthread(
DeliveryWorkerThread, 0, NULL );

    if ( pDeliHandles[i] ==
INVALID_HANDLE_VALUE )
        throw new CWEBCNLT_ERR(
ERR_DELIVERY_THREAD_FAILED );
}

break;

case DLL_PROCESS_DETACH:

```

```

(dwNumDeliveryThreads)
{
    if
    {
        if
        {
            //write event into txn log for STOP
            txnDelilog-
            >WriteCtrlRecToLog( TXN_EVENT_STOP, szMyComputerName,
            sizeof( szMyComputerName ) );

            // This will do a clean shutdown of the
            delivery log file

            CTxnLog *txnDelilogLocal = txnDelilog;
            txnDelilog= NULL;
            delete txnDelilogLocal;
        }
        delete [] pDeliHandles;
        delete [] pDelBuff;
        CloseHandle( hWorkerSemaphore );
        CloseHandle( hDoneEvent );
        DeleteCriticalSection( &DelBuffCriticalSection );
    }
    Delete delivery delay critical section
    DeleteCriticalSection( &hConnectCriticalSection );
    DeleteCriticalSection( &TermCriticalSection );
    if
    (hLibInstanceTm != NULL)
        FreeLibrary( hLibInstanceTm );
    hLibInstanceTm = NULL;
    if
    (hLibInstanceDb != NULL)
        FreeLibrary( hLibInstanceDb );
    hLibInstanceDb = NULL;

```

```

Sleep(500);
break;

default:
/* nothing
*/
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _snprintf( szMsg, sizeof( szMsg ),
"%s error, code %d: %s",
e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText() );
    WriteMessageToEventLog( szMsg );
    delete e;
    TerminateExtension(0);
    return FALSE;
}
catch (...)
{
    WriteMessageToEventLog( TEXT("Unhandled
exception. DLL could not load."));
    TerminateExtension(0);
    return FALSE;
}
return TRUE;
}

/* FUNCTION: GetExtensionVersion
*
* PURPOSE: This function is called by the
inet service when the DLL is first loaded.
*
* ARGUMENTS: HSE_VERSION_INFO *pVer
passed in structure in which to place
expected version number.
*
* RETURNS: TRUE
inet service
expected return value.
*/
BOOL WINAPI GetExtensionVersion( HSE_VERSION_INFO
*pVer )
{
    pVer->dwExtensionVersion =
MAKELONG( HSE_VERSION_MINOR, HSE_VERSION_MAJOR );
    lstrcpy( pVer->lpszExtensionDesc, "TPC-C
Server.", HSE_MAX_EXT_DLL_NAME_LEN );
    return TRUE;
}

/* FUNCTION: TerminateExtension
*
* PURPOSE: This function is called by the
inet service when the DLL is about to be unloaded.
*/

```

```

/*
 *          Release all resources
in anticipation of being unloaded.
*
* RETURNS:      TRUE      inet service
expected return value.
*/
BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0;
i<dwNumDeliveryThreads; i++)
            WaitForSingleObject(
pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
*
* PURPOSE:      This function is the main entry
point for the TPCC DLL. The internet service
*                  calls this function
passing in the http string.
*
* ARGUMENTS:      EXTENSION_CONTROL_BLOCK
*                  *pECB      structure pointer to passed in
internet
*
*                  service information.
*
* RETURNS:      DWORD
*                  HSE_STATUS_SUCCESS
connection can be dropped if
error
*
*                  HSE_STATUS_SUCCESS_AND_KEEP_CONN
keep connect valid comment sent
*
* COMMENTS:      None
*/
DWORD WINAPI
HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int                               TermId,
iSyncId;
    char                             szBuffer[4096];
    int                               lpbSize;
    static char                      szHeader[] = "200 Ok";
    DWORD                            dwSize = 6;
// initial value is strlen(szHeader)
    char                             szHeader1[4096];
    DWORD                            dwAddr; // used to
store Win32 exception address

```

```

LPEXCEPTION_POINTERS
pExceptionInfo; // pointer to Win32
exception info

#ifndef ICECAP
StartCAP();
#endif

// Use structured exception handling for
Win32 exceptions
//
try
{
    ProcessCommand(pECB, szBuffer,
TermId, iSyncId);
}
except (
    pExceptionInfo =
GetExceptionInformation(), // can call
GetExceptionInformation only in filter (not handler)
dwAddr =
(DWORD)pExceptionInfo->ExceptionRecord-
>ExceptionAddress, // save the address
EXCEPTION_EXECUTE_HANDLER) // handle all
exceptions
{
    char
szMsg[512];
    int
iLen;

    MEMORY_BASIC_INFORMATION mbi ;
VirtualQuery( (void*)dwAddr,
&mbi, sizeof( mbi ) );
    DWORD hInstance =
(DWORD)mbi.AllocationBase ;

    iLen = wsprintf(szMsg,
TEXT("Unhandled exception (%#x) in Web Client's
HttpExtensionProc. "
"Occured at
address %#x, base %#x, tpcc_com.dll at %#x, tpcc.dll
at %#x, tpcc_com_all.dll at %#x"),
GetExceptionCode(), dwAddr, hInstance,
GetModuleHandle("tpcc_com.dll"),
GetModuleHandle("tpcc.dll"),
GetModuleHandle("tpcc_com_all.dll"));

    if (txnDelilog != NULL)
    {
        txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_WARNING, szMsg, iLen +
1);

    }
    ErrorForm( pECB, ERR_TYPE_WEBDLL,
GetExceptionCode(), TermId, iSyncId, szMsg, szBuffer
);
}

```

```

#endif ICECAP
StopCAP();
#endif

lpbSize = strlen(szBuffer);
dwSize += lpbSize;
dwSize += wsprintf(szHeader1,
"Content-Type:
text/html\r\n"
"Content-Length:
%d\r\n"
"Connection: Keep-
Alive\r\n\r\n", lpbSize);
strcat( szHeader1, szBuffer );

(*pECB->ServerSupportFunction)(pECB-
>ConnID, HSE_REQ_SEND_RESPONSE_HEADER, szHeader,
(LPDWORD) &dwSize, (LPDWORD)szHeader1);

//finish up and keep connection
pECB->dwHttpStatusCodes = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

/* FUNCTION: ProcessCommand
*
* PURPOSE:      This function parses the commands
from the driver and executes corresponding
transactions.
*
* ARGUMENTS:      EXTENSION_CONTROL_BLOCK
*                  *pECB      structure pointer to passed in
internet
*
*                  service information.
*
* RETURNS:      None (outputs into the
szBuffer parameter).
*
* COMMENTS:      Separated from HttpExtensionProc
to be able to use structured exception handling in
*
*                  HttpExtensionProc (cannot mix C++ and Win32
exceptions in one functions).
*
*/
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId)
{
    int                               iCmd, FormId;
    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd,
&FormId, &TermId, &iSyncId);

        if (TermId != 0)
        {
            if (TermId < 0 ||
TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )

```

```

{
    // debugging...
    szTmp[128];
    wsprintf( szTmp, "Invalid term ID; TermId = %d", TermId );
    WriteMessageToEventLog( szTmp );
    throw new CWEBCNT_ERR( ERR_INVALID_TERMID );
}

//must have a valid syncid here since termid is valid
if (iSyncId != Term.pClientData[TermId].iSyncId)
    throw new CWEBCNT_ERR( ERR_INVALID_SYNC_CONNECTION );

//set use time
Term.pClientData[TermId].iTickCount =
GetTickCount();
}

switch(iCmd)
{
case 0:
    WelcomeForm(pECB,
szBuffer);
    break;
case 1:
    switch( FormId )
    {
    case WELCOME_FORM:
    case MAIN_MENU_FORM:
        break;
    case NEW_ORDER_FORM:
        ProcessNewOrderForm(pECB, TermId,
szBuffer);
        break;
    case PAYMENT_FORM:
        ProcessPaymentForm(pECB, TermId, szBuffer);
        break;
    case DELIVERY_FORM:
        ProcessDeliveryForm(pECB, TermId,
szBuffer);
        break;
    case ORDER_STATUS_FORM:
        ProcessOrderStatusForm(pECB, TermId,
szBuffer);
        break;
    case STOCK_LEVEL_FORM:
        ProcessStockLevelForm(pECB, TermId,
szBuffer);
        break;
    }
}

{
    // char
    wsprintf(
szTmp, "Invalid term ID; TermId = %d", TermId );
    WriteMessageToEventLog( szTmp );
    throw new CWEBCNT_ERR( ERR_INVALID_TERMID );
}

case 2:
    // new-order selected from menu; display new-order input form
    MakeNewOrderForm(TermId, NULL, INPUT_FORM,
szBuffer);
    break;
case 3:
    // payment selected from menu; display payment input form
    MakePaymentForm(TermId, NULL, INPUT_FORM, szBuffer);
    break;
case 4:
    // delivery selected from menu; display delivery input form
    MakeDeliveryForm(TermId, NULL, INPUT_FORM,
szBuffer);
    break;
case 5:
    // order-status selected from menu; display order-status input form
    MakeOrderStatusForm(TermId, NULL,
INPUT_FORM, szBuffer);
    break;
case 6:
    // stock-level selected from menu; display stock-level input form
    MakeStockLevelForm(TermId, NULL,
INPUT_FORM, szBuffer);
    break;
case 7:
    // ExitCmd
    TermDelete(TermId);
    WelcomeForm(pECB,
szBuffer);
    break;
case 8:
    SubmitCmd(pECB,
szBuffer);
    break;
case 9:
    // menu
    MakeMainMenuForm(TermId,
Term.pClientData[TermId].iSyncId, szBuffer);
    break;
case 10:
    // CMD=Clear
    // resets all connections; should only be used when no other
    // connections are active
    TermDeleteAll();
    TermInit();
    WelcomeForm(pECB,
szBuffer);
    break;
}

case 11: // CMD=Stats
StatsCmd(pECB,
szBuffer);
break;
}

catch (CBaseErr *e)
{
    ErrorForm( pECB, e->ErrorType(),
e->ErrorNum(), TermId, iSyncId, e->ErrorText(),
szBuffer );
    delete e;
}

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("TPCC.DLL"));

    _stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
            EVENTLOG_ERROR_TYPE, // event type
            0, // event category
            0, // event ID
            NULL, // current user's
SID
            2, // strings in
lpszStrings
            0, // no bytes of raw
data
            (LPCTSTR *)lpszStrings, // array of
error strings
            NULL); // no raw data
        (VOID) DeregisterEventSource(hEventSource);
    }
}

/* FUNCTION: DeliveryWorkerThread
*
* PURPOSE: This function processes deferred
* delivery txns. There are typically several
* threads running this
* routine. The number of threads is determined by an
* entry
*      read from the registry.
* The thread waits for work by waiting on semaphore.
*      When a delivery txn is
* posted, the semaphore is released. After processing
*/

```

```

/*
   the delivery txn,
information is logged to record the txn status and
execution
   time.
*/
/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE           *pTxn = NULL;
    DELIVERY_TRANSACTION delivery;
    PDELIVERY_DATA       pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF  txnDeliRec;
    DWORD                index;
    HANDLE               handles[2];
    SYSTEMTIME            trans_end;
    //delivery transaction finished
    SYSTEMTIME            trans_start;
    //delivery transaction start time
    assert(txnDeliLog != NULL);
    try
    {
        if (Reg.eDB_Protocol == ODBC)
        {
            if (Reg.dwConnectDelay
> 0)
            {
                // Synchronize connect (for VIA)
                // EnterCriticalSection(&hConnectCriticalSection);
                Sleep(Reg.dwConnectDelay);
                LeaveCriticalSection(&hConnectCriticalSection);
            }
            pTxn = pCTPCC_ODBC_new(
                Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
                szMyComputerName, Reg.szDbName,
                Reg.szSPPrefix,
                Reg.bCallNoDuplicatesNewOrder );
            pDeliveryData = pTxn->BuffAddr_Delivery();
        }
    }

```

```

    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in
Delivery Txn thread. Could not connect to database.
"
        "%s.
Server=%s, User=%s, Password=%s, Database=%s",
        e-
>ErrorText(), Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
        WriteMessageToEventLog( szTmp );
        delete e;
        goto ErrorExit;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
        goto ErrorExit;
    }
    while (TRUE)
    {
        try
        {
            //while delivery thread
running, i.e. user has not requested termination
            while (TRUE)
            {
                // need to
wait for multiple objects: program exit or worker
semaphore;
                handles[0] =
hDoneEvent;
                handles[1] =
hWorkerSemaphore;
                index =
WaitForMultipleObjects( 2, &handles[0], FALSE,
INFINITE );
                if (index ==
WAIT_OBJECT_0)
                    goto ErrorExit;
                ZeroMemory(&txnDeliRec,
sizeof(txnDeliRec));
                txnDeliRec.TxnType =
TXN_REC_TYPE_TPCC_DELIV_DEF;
                // make a
local copy of current entry from delivery buffer and
increment buffer index
                EnterCriticalSection(&DelBuffCriticalSection);
                delivery =
*(pDelBuff+dwDelBuffBusyIndex);
                dwDelBuffFreeCount++;

```

```

        dwDelBuffBusyIndex++;
        if
(dwDelBuffBusyIndex == dwDelBuffSize) // wrap-
around if at end of buffer
        dwDelBuffBusyIndex = 0;
        LeaveCriticalSection(&DelBuffCriticalSection);

        pDeliveryData->w_id = delivery.w_id;
        pDeliveryData->o_carrier_id =
delivery.o_carrier_id;

        txnDeliRec.w_id = pDeliveryData->w_id;
        txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;
        txnDeliRec.TxnStartT0 =
Get64BitTime(&delivery.queue);
        GetLocalTime(
&trans_start );
        pTxn-
>Delivery();
        GetLocalTime(
&trans_end );
        //log txn
        txnDeliRec.TxnStatus = ERR_SUCCESS;
        for (int i=0;
i<10; i++)
        txnDeliRec.o_id[i] = pDeliveryData-
>o_id[i];
        txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) -
txnDeliRec.TxnStartT0);
        txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) -
Get64BitTime(&trans_start));
        if
(txnDeliLog != NULL)
            txnDeliLog->WriteToLog(&txnDeliRec);
        }
        catch (CBaseErr *e)
        {
            char szTmp[1024];
            wsprintf( szTmp, "%s
Error (code %d) in Delivery Txn thread. %s",

```

```

e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText() );
        WriteMessageToEventLog(
szTmp );

                // log the error txn
txnDeliRec.TxnStatus =
e->ErrorType();
                if (txnDeliog != NULL)
                        txnDeliog-
>WriteToLog(&txnDeliRec);

                delete e;
            }
            catch (...)
            {
                // unhandled exception;
shouldn't happen; not much we can do...

                WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
            }
}

ErrorExit:
    if (Reg.dwConnectDelay > 0)
    {
        // Synchronize disconnect (for
VIA)
        //

        EnterCriticalSection(&hConnectCriticalSecti
on);

        Sleep(Reg.dwConnectDelay);
    }

    delete pTxn;

    if (Reg.dwConnectDelay > 0)
    {
        // Synchronize disconnect (for
VIA)
        //

        LeaveCriticalSection(&hConnectCriticalSecti
on);
    }

    _endthread();
}

/* FUNCTION: PostDeliveryInfo
*
* PURPOSE:      This function enters the delivery
txn into the deferred delivery buffer.
*
* RETURNS:      BOOL      FALSE
*                  delivery information posted successfully
*
*                  TRUE      error cannot post delivery info
*/

```

```

BOOL PostDeliveryInfo(long w_id, short o_carrier_id)
{
    BOOL bError;

    EnterCriticalSection(&DelBuffCriticalSection);
    if (dwDelBuffFreeCount > 0)
    {
        bError = FALSE;
        (pDelBuff+dwDelBuffFreeIndex)-
>w_id
                = w_id;
        (pDelBuff+dwDelBuffFreeIndex)-
>o_carrier_id
                = o_carrier_id;
        GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)
->queue);

        dwDelBuffFreeCount--;
        dwDelBuffFreeIndex++;
        if (dwDelBuffFreeIndex == dwDelBuffSize)
                dwDelBuffFreeIndex = 0;
        // wrap-around if at end of
buffer
    }
    else
        // No free buffers.  Return an
error, which indicates that the delivery buffer is
full.
        // Most likely, the number of
delivery worker threads needs to be increased to keep
up
        // with the txn rate.
        bError = TRUE;
    LeaveCriticalSection(&DelBuffCriticalSection);

    if (!bError)
        // increment worker semaphore to
wake up a worker thread
        ReleaseSemaphore(
hWorkerSemaphore, 1, NULL );

    return bError;
}

/* FUNCTION: ProcessQueryString
*
* PURPOSE:      This function extracts the
relevant information out of the http command passed
in from
*                  the browser.
*
* COMMENTS:      If this is the initial connection
i.e. client is at welcome screen then
*                  there will
not be a terminal id or current form id.  If this is
the case
*                  then the
pTermid and pFormid return values are undefined.
*/

```

```

void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermid, int
*pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e.
CMD=command
    static char *szCmds[] =
    {
        "Process", "..NewOrder..",
"..Payment..", "..Delivery..", "..Order-Status..",
"..Stock-Level..", "...Exit..", "Submit", "Menu",
"Clear", "Stats", ""
    };

    *pCmd = 0;                                // default is
the login screen
    *pTermid = 0;

    // if no params (i.e., empty query string),
then return login screen
    if (strlen(pECB->lpszQueryString) == 0)
        return;

    // parse FORMID, TERMID, and SYNCID
    *pFormId = GetIntKeyValue(&ptr, "FORMID",
NO_ERR, NO_ERR);
    *pTermid = GetIntKeyValue(&ptr, "TERMID",
NO_ERR, NO_ERR);
    *pSyncId = GetIntKeyValue(&ptr, "SYNCID",
NO_ERR, NO_ERR);

    // parse CMD
    GetKeyValue(&ptr, "CMD", szBuffer,
sizeof(szBuffer), ERR_COMMAND_UNDEFINED);

    // see which command it matches
    for(i=0; ; i++)
    {
        if (szCmds[i][0] == 0)
            // no more; no match;
return error
        throw new CWEBCNT_ERR(
ERR_COMMAND_UNDEFINED);
        if ( !strcmp(szCmds[i], szBuffer)
)
        {
            *pCmd = i+1;
            break;
        }
    }

    /* FUNCTION: void WelcomeForm
*
*/
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuf)

```

```
{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this
is first form client sees.
    strcpy( szBuffer,
    "<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"

        "<B><BIG>Microsoft TPC-C Web Client (ver
4.20)</BIG></B> <BR> <BR>

        "<font face=\"Courier New\"><PRE>
        "Compiled: __DATE__ , __TIME__ <BR>
        "Source: __FILE__ ( __TIMESTAMP__ )
<BR>
        "</PRE></font>

        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">

        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"1\">
        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"0\">
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"0\">
        "<INPUT TYPE=\"hidden\" NAME=\"VERSION\" VALUE=\"\" WEBCLIENT_VERSION \">
        );

        sprintf( szTmp, "Configuration
Settings: <BR><font face=\"Courier New\" color=\"blue\"><PRE>
        "Txn Monitor          = <B>%s</B><BR>
        "Database protocol     = <B>%s</B><BR>
        "Max Connections       = <B>%d</B><BR>"#
of Delivery Threads   = <B>%d</B><BR>"#
        "Max Pending Deliveries = <B>%d</B><BR>"#
szTnxMonNames[Reg.eTnxMon],
szDBNames[Reg.eDB_Protocol],      Reg.dwMaxConnections,
dwNumDeliveryThreads, dwDelBuffSize );
    strcat( szBuffer, szTmp);

    if (Reg.eTnxMon == COM)
}

```

```
{
    sprintf( szTmp, "COM Single
Pool      = <B>%s</B><BR>", Reg.bCOM_SinglePool ?
"YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>");

if (Reg.eTnxMon == None)           // connection options may be
specified when not using a txn monitor
    sprintf( szTmp, "Please enter
your database options for this connection:<BR>

        "<font face=\"Courier New\" color=\"blue\"><PRE>
        "DB Server      = <INPUT NAME=\"db_server\" SIZE=20 VALUE=\"%s\"><BR>
        "DB User ID     = <INPUT NAME=\"db_user\" SIZE=20 VALUE=\"%s\"><BR>
        "DB Password     = <INPUT NAME=\"db_passwd\" SIZE=20 VALUE=\"%s\"><BR>
        "DB Name        = <INPUT NAME=\"db_name\" SIZE=20 VALUE=\"%s\"><BR>
        "</PRE></font>

Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
else                                // if using a txn monitor,
connection options are determined from registry;
can't
    // set per user. show options
fyi
    sprintf( szTmp, "Database
options which will be used by the transaction
monitor:<BR>

        "<font face=\"Courier New\" color=\"blue\"><PRE>
        "DB Server      = <B>%s</B><BR>
        "DB User ID     = <B>%s</B><BR>
        "DB Password     = <B>%s</B><BR>
        "DB Name        = <B>%s</B><BR>
        "</PRE></font>

Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
    strcat( szBuffer, szTmp);

    sprintf( szTmp, "Please enter your
Warehouse and District for this session:<BR>"#
}

```

```

        "<font face=\"Courier New\" color=\"blue\"><PRE>
        "District ID   = <INPUT NAME=\"d_id\" SIZE=2><BR>
        "</PRE></font><HR>
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Submit\">
        "</FORM></BODY></HTML>"

/* FUNCTION: SubmitCmd
*
* PURPOSE: This function allocated a new
terminal id in the Term structure array.
*/
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int             iNewTerm;
    char            *ptr = pECB->lpszQueryString;
    char            szVersion[32]      = { 0 };
    char            szServer[32]       = { 0 };
    char            szUser[32]         = "sa";
    char            szPassword[32]     = { 0 };
    char            szDatabase[32]     = "tpcc";

    // validate version field; the version
field ensures that the RTE is synchronized with the
web client
    GetKeyValue(&ptr, "VERSION", szVersion,
sizeof(szVersion), ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCLNT_ERR(
ERR_VERSION_MISMATCH );

    if (Reg.eTnxMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server",
szServer, sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user",
szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd",
szPassword, sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name",
szDatabase, sizeof(szDatabase), NO_ERR);
    }
}

```

```

    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_W_ID_INVALID );

    // parse district ID
    int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
    if ( d_id < 1 || d_id > 10 )
        throw new CWEBCLNT_ERR(
ERR_D_ID_INVALID );

    iNewTerm = TermAdd();

    Term.pClientData[iNewTerm].w_id = w_id;
    Term.pClientData[iNewTerm].d_id = d_id;

    try
    {
        if (Reg.eTxnMon == COM)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
            else if (Reg.eDB_Protocol ==
ODBC)

                Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword,
szMyComputerName,

                szDatabase, Reg.szSPPrefix,

                Reg.bCallNoDuplicatesNewOrder );
        catch (...)
        {
            TermDelete(iNewTerm);
            throw; // pass
exception upward
        }

        MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
    }

/* FUNCTION: StatsCmd
*
* PURPOSE: This function returns to the
browser the total number of active terminal ids.
* This routine is for
development/debugging purposes.
*/

```

```

void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int i;
    int iTotal;

    EnterCriticalSection(&TermCriticalSection);

    iTotal = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)
            iTotal++;
    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,
    "<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>" "<><BODY><B> Total
Active Connections: %d </BIG></B><BR></BODY></HTML>" , iTotal );
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        {ERR_COMMAND_UNDEFINED,
        "Command undefined."},
        {ERR_D_ID_INVALID,
        "Invalid District ID Must be 1 to 10."},
        {ERR_DELIVERY_CARRIER_ID_RANGE,
        "Delivery Carrier ID out of range
must be 1 - 10."},
        {ERR_DELIVERY_CARRIER_INVALID,
        "Delivery Carrier ID invalid must be
numeric 1 - 10."},
        {ERR_DELIVERY_MISSING_OCD_KEY,
        "Delivery missing Carrier ID key \"OCD*\"."},
        {ERR_DELIVERY_THREAD_FAILED,
        "Could not start delivery worker
thread."},
        {ERR_GETPROCADDR_FAILED,
        }
    };
}
```

```

    "Could not map proc in DLL. GetProcAddress
error. DLL="
    {
        ERR_HTML_ILL_FORMED,
        "Required key field is missing from HTML
string."
    }
    {
        ERR_INVALID_SYNC_CONNECTION,
        "Invalid Terminal Sync ID."
    }
    {
        ERR_INVALID_TERMID,
        "Invalid Terminal ID."
    }
    {
        ERR_LOADDLL_FAILED,
        "Load of DLL failed. DLL="
    }
    {
        ERR_MAX_CONNECTIONS_EXCEEDED,
        "No connections available. Max Connections
is probably too low."
    }
    {
        ERR_MISSING_REGISTRY_ENTRIES,
        "Required registry entries are missing.
Rerun INSTALL to correct."
    }
    {
        ERR_NEWORDER_CUSTOMER_INVALID,
        "New Order customer id invalid
data type, range = 1 to 3000."
    }
    {
        ERR_NEWORDER_CUSTOMER_KEY,
        "New Order missing Customer key
\"CID*\"."
    }
    {
        ERR_NEWORDER_DISTRICT_INVALID,
        "New Order District ID Invalid
range 1 - 10."
    }
    {
        ERR_NEWORDER_FORM_MISSING_DID,
        "New Order missing District key
\"DID*\"."
    }
    {
        ERR_NEWORDER_ITEMID_INVALID,
        "New Order Item Id is wrong data type, must
be numeric."
    }
    {
        ERR_NEWORDER_ITEMID_RANGE,
        "New Order Item Id is out of
range. Range = 1 to 999999."
    }
    {
        ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
        "New Order Item_Id field entered without a
corresponding Supp_W."
    }
    {
        ERR_NEWORDER_MISSING_IID_KEY,
        "New Order missing Item Id key \"IID*\"."
    }

```

```

        },
        {
    ERR_NEORDER_MISSING_QTY_KEY,
    "New Order Missing Qty key \\"Qty##\\\"."
        },
        {
    ERR_NEORDER_MISSING_SUPPW_KEY,
    "New Order missing Supp_W key
\"SP##\\\"."
        },
        {
    ERR_NEORDER_NOITEMS_ENTERED,
    "New Order No order lines entered."
        },
        {
    ERR_NEORDER_QTY_INVALID,
    "New Order Qty invalid must be
numeric range 1 - 99."
        },
        {
            ERR_NEORDER_QTY_RANGE,
    "New Order Qty is out of range. Range = 1
to 99."
        },
        {
    ERR_NEORDER_QTY_WITHOUT_SUPPW,
    "New Order Qty field entered
without a corresponding Supp_W."
        },
        {
    ERR_NEORDER_SUPPW_INVALID,
    "New Order Supp_W invalid data
type must be numeric."
        },
        {
    ERR_NO_SERVER_SPECIFIED,
    "No Server name specified."
        },
        {
    ERR_ORDERSTATUS_CID_AND_CLT,
    "Order Status Only Customer ID or Last Name
may be entered, not both."
        },
        {
    ERR_ORDERSTATUS_CID_INVALID,
    "Order Status Customer ID invalid, range
must be numeric 1 - 3000."
        },
        {
    ERR_ORDERSTATUS_CLT_RANGE,
    "Order Status Customer last name
longer than 16 characters."
        },
        {
    ERR_ORDERSTATUS_DID_INVALID,
    "Order Status District invalid, value must
be numeric 1 - 10."
        },
        {
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    "Order Status Either Customer ID or Last
Name must be entered."
        },
        {
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    "Order Status missing Customer key

```

```

\"CID*\\\"."
        },
        {
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    "Order Status missing Customer Last Name
key \\"CLT*\\\"."
        },
        {
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    "Order Status missing District key
\"DID*\\\"."
        },
        {
    ERR_PAYMENT_CDI_INVALID,
    "Payment Customer district
invalid must be numeric."
        },
        {
    ERR_PAYMENT_CID_AND_CLT,
    "Payment Only Customer ID or Last
Name may be entered, not both."
        },
        {
    ERR_PAYMENT_CUSTOMER_INVALID,
    "Payment Customer data type invalid, must
be numeric."
        },
        {
    ERR_PAYMENT_CWI_INVALID,
    "Payment Customer Warehouse
invalid, must be numeric."
        },
        {
    ERR_PAYMENT_DISTRICT_INVALID,
    "Payment District ID is invalid, must be 1
- 10."
        },
        {
    ERR_PAYMENT_HAM_INVALID,
    "Payment Amount invalid data type
must be numeric."
        },
        {
            ERR_PAYMENT_HAM_RANGE,
    "Payment Amount out of range, 0 - 9999.99."
        },
        {
    ERR_PAYMENT_LAST_NAME_TO_LONG,
    "Payment Customer last name
longer than 16 characters."
        },
        {
    ERR_PAYMENT_MISSING_CDI_KEY,
    "Payment missing Customer district key
\"CDI*\\\"."
        },
        {
    ERR_PAYMENT_MISSING_CID_CLT,
    "Payment Either Customer ID or Last Name
must be entered."
        },
        {
    ERR_PAYMENT_MISSING_CID_KEY,
    "Payment missing Customer Key \\"CID*\\\"."
        },

```

```

    {
    ERR_PAYMENT_MISSING_CLT_KEY,
    "Payment missing Customer Last Name key
\"CLT*\\\"."
    },
    {
    ERR_PAYMENT_MISSING_CWI_KEY,
    "Payment missing Customer Warehouse key
\"CWI*\\\"."
    },
    {
    ERR_PAYMENT_MISSING_DID_KEY,
    "Payment missing District Key \\"DID*\\\"."
    },
    {
    ERR_PAYMENT_MISSING_HAM_KEY,
    "Payment missing Amount key \\"HAM*\\\"."
    },
    {
    ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
    "Stock Level; missing Threshold key
\"TT*\\\"."
    },
    {
    ERR_STOCKLEVEL_THRESHOLD_INVALID,
    "Stock Level; Threshold value must be in
the range = 1 - 99."
    },
    {
    ERR_STOCKLEVEL_THRESHOLD_RANGE,
    "Stock Level Threshold out of
range, range must be 1 - 99."
    },
    {
        ERR_VERSION_MISMATCH,
    "Invalid version field. RTE and Web Client
are probably out of sync."
    },
    {
        ERR_W_ID_INVALID,
    "Invalid Warehouse ID."
    },
    {
        0,
    ""
    };
char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number." );
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {

```

```

errorMsgs[i].szMsg );
                strcpy( szTmp,
                break;
            }
        }

        if (m_szTextDetail)
            strcat( szTmp, m_szTextDetail );
        if (m_SystemErr)
            wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

        m_szErrorText = new char[strlen(szTmp)+1];
        strcpy( m_szErrorText, szTmp );
        return m_szErrorText;
    }

/* FUNCTION: GetKeyValue
*
* PURPOSE:      This function parses a http
formatted string for specific key values.
*
* ARGUMENTS:    char
*               *pQueryString      http string from client
*               browser
*               char
*               *pKey             key
*               value to look for
*               char
*               *pValue           character array into which to place key's
value
*               int
*               iMax             maximum length of key value array.
*               WEBERROR         err
*               error value to throw
*
* RETURNS:     nothing.
*
* ERROR:       if (the pKey value is not found)
then
*               if
(err == 0)
*
*               return (empty string)
*
*               else
*
*               throw CWECLNT_ERR(err)
*
* COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*               TPC-C input
fields in such a manner that the keys can be
extracted in the
*               above manner.
*/

```

```

void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;
    iMax--; // one position is for terminating
null
    while( *ptr && *ptr != '&' && iMax)
    {
        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null
    *pQueryString = ptr;
    return;

ErrorExit:
    if (err != NO_ERR)
        throw new CWECLNT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
*
* PURPOSE:      This function parses a http
formatted string for a specific key value.
*
* ARGUMENTS:    char
*               *pQueryString      http string from client
*               browser
*               char
*               *pKey             key
*               value to look for
*               WEBERROR         NoKeyErr
*               error value to throw if
key not found
*               WEBERROR         NotIntErr
*               error value to throw if
value not numeric
*
* RETURNS:     integer
*
* ERROR:       if (the pKey value is not found)
then
*               if
(NoKeyErr != NO_ERR)
*
*               throw CWECLNT_ERR(err)
*
*               else
*
*               return 0
*
*               else if (non-
numeric char found) then

```

```

*
* (NotIntErr != NO_ERR) then
*
*         throw CWECLNT_ERR(err)
*
*         else
*
*         return 0
*
* COMMENTS:      http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*               TPC-C input
fields in such a manner that the keys can be
extracted in the
*               above manner.

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;
    ptr0 = ptr; // remember
starting point
// scan string until a terminator (null or
&) or a non-digit
while( *ptr && *ptr != '&' && isdigit(*ptr)
)
    ptr++;

// make sure we stopped scanning for the
right reason
if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
{
    if (NotIntErr != NO_ERR)
        throw new CWECLNT_ERR(
NoKeyErr );
    return 0;
}

*pQueryString = ptr;
return atoi(ptr0);

ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWECLNT_ERR(
NoKeyErr );
    return 0;
}

/* FUNCTION: TermInit
*
* PURPOSE:      This function initializes the
client terminal structure; it is called when the
TPCC.DLL

```

```

/*
   is first loaded by the
*/
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries =
Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {

        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNTErr(
ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData,
Term.iNumEntries * sizeof(CLIENTDATA) );

    Term.iFreeList =
Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets
set to -1, which marks it as "in use".
    // This is intentional, as the zero
entry is used as an anchor and never
    // allocated as an actual
terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree =
i-1;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
*
* PURPOSE: This function frees allocated
resources associated with the terminal structure.
*
* ARGUMENTS: none
*
* RETURNS: None
*
* COMMENTS: This function is called only when
the inet service unloads the TPCC.DLL
*/
void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)

```

```

    {
        if (Term.pClientData[i].iNextFree
== -1)
            delete
Term.pClientData[i].pTxn;
        }

        Term.iFreeList
        = 0;
        Term.iNumEntries
        = 0;
        if (Term.pClientData)
            free(Term.pClientData);
        Term.pClientData
        = NULL;

        LeaveCriticalSection(&TermCriticalSection);
    }

/* FUNCTION: TermAdd
*
* PURPOSE: This function assigns a terminal
id which is used to identify a client browser.
*
* RETURNS: int
*           assigned terminal id
*/
int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;

        Term.pClientData[iNewTerm].iNextFree = -1;
        // indicates this position is in use
    }
    else
    {
        // no open slots, so find the
slot that hasn't been used in the longest time and
reuse it
        for(iNewTerm=1, i=1,
iTICKCOUNT=0x7FFFFFFF; i<Reg.dwMaxConnections; i++)
        {
            if (iTICKCOUNT >
Term.pClientData[i].iTICKCOUNT)
                iTICKCOUNT =
Term.pClientData[i].iTICKCOUNT;
            iNewTerm = i;
        }
        // if oldest term is less than
one minute old, it probably means that more
connections
    }
}

```

```

        // are being attempted than were
specified as "Max Connections" at install. In this
case,
        // do not bump existing
connection; instead, return error to requestor.
        if ((GetTickCount() - iTickCount)
< 60000)
    {

        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNTErr(
ERR_MAX_CONNECTIONS_EXCEEDED );
    }

    Term.pClientData[iNewTerm].iTICKCOUNT =
GetTickCount();
    Term.pClientData[iNewTerm].iSyncId =
Term.iMasterSyncId++;
    Term.pClientData[iNewTerm].pTxn = NULL;

    LeaveCriticalSection(&TermCriticalSection);
    return iNewTerm;
}

/* FUNCTION: TermDelete
*
* PURPOSE: This function makes a terminal
entry in the Term array available for reuse.
*
* ARGUMENTS: int
*           id
*           Terminal id of client exiting
*/
void TermDelete(int id)
{
    if (id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;
        // put onto free list
        EnterCriticalSection(&TermCriticalSection);
        Term.pClientData[id].iNextFree =
Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
*/
void ErrorForm(EXTENSION_CONTROL_BLOCK *pecb, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer )
{

```

```

wsprintf(szBuffer,
        "<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\""
METHOD=\\\"GET\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"STATUSID\\\" VALUE=\\\"%d\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"ERROR\\\" VALUE=\\\"%d\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"FORMID\\\" VALUE=\\\"%d\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"TERMINID\\\" VALUE=\\\"%d\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"SYNCID\\\" VALUE=\\\"%d\\\" >
        "<BOLD>An Error
Occurred</BOLD><BR><BR>
        \"%s"
        "<BR><BR><HR>"
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\".NewOrder..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\".Payment..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\".Delivery..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\".Order-Status..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\".Stock-Level..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\".Exit..\\\" >
        "</FORM></BODY></HTML>"
        , iType, iErrorMsg,
MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
 */
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm)
{
    wsprintf(szForm,
            "<HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
            "Select Desired
Transaction.<BR><HR>"
            "<FORM ACTION=\"tpcc.dll\\\""
METHOD=\\\"GET\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"STATUSID\\\" VALUE=\\\"0\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"ERROR\\\" VALUE=\\\"0\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"FORMID\\\" VALUE=\\\"%d\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"TERMINID\\\" VALUE=\\\"%d\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"CMD\\\" VALUE=\\\".NewOrder..\\\" >
            "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\".Payment..\\\" >
            "<INPUT TYPE=\"submit\\\""

```

```

        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \"..Delivery..\">"
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \"..Order_Status..\">"
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \"..Stock_Level..\">"
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \"..Exit..\">"
        "</FORM></BODY></HTML>"
```

, MAIN_MENU_FORM, iTermId,

iSyncId);

}

/* FUNCTION: MakeStockLevelForm

*

*** PURPOSE:** This function constructs the Stock Level HTML page.

*

*** COMMENTS:** The internal client buffer is created when the terminal id is assigned and should not be freed except when the client terminal id is no longer needed.

*/

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA *pStockLevelData, BOOL bInput, char *szForm)

{

int c;

c = wsprintf(szForm,

"<HTML><HEAD><TITLE>TPC-C Stock

Level</TITLE></HEAD><FORM ACTION=\"tpcc.dll\""

METHOD= \"GET\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"STATUSID\" VALUE= \"0\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"ERROR\" VALUE= \"0\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"FORMID\" VALUE= \"%d\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"TERMID\" VALUE= \"%d\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"SYNCID\" VALUE= \"%d\" >"

"<PRE>"

Stock-Level
"

"Warehouse: %6.6d District:

%2.2d

,

STOCK_LEVEL_FORM, iTermId,

Term.pClientData[iTermId].iSyncid,

Term.pClientData[iTermId].w_id,

Term.pClientData[iTermId].d_id);

if (bInput)

{

strcpy(szForm+c,

"Stock Level Threshold:

<INPUT NAME= \"TT*\" SIZE=2>

"

"low stock:

"

```

<BR> <BR> <BR></PRE><HR>"           "<BR> <BR> <BR> <BR>
NAME=\\"CMD\\" VALUE=\\"Process\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"Menu\\">>           "<INPUT TYPE=\\"submit\\"
}
else
{
    wsprintf(szForm+c,
              "Stock Level Threshold:
%2.2d<BR> <BR>"           "low stock:
%3.3d</font> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>"           "<BR> <BR> <BR> <BR>
<BR> <BR> <BR></PRE><HR>"           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..NewOrder..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Payment..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Delivery..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Order-Status..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Stock-Level..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Exit..\\">>"           "</FORM></HTML>
, pStockLevelData-
>threshold, pStockLevelData->low_stock);
}
}

/* FUNCTION: MakeNewOrderForm
 *
 * COMMENTS: The internal client buffer is
 * created when the terminal id is assigned and should
 * not
 *                                     be freed
 * except when the client terminal id is no longer
 * needed.
 */
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm)
{
    int                     i, c;
    BOOL                   bValid;
    static      char szBR[] = " <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>";
    if (!bInput)
        assert( pNewOrderData-
>exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem );
    bValid = (bInput || (pNewOrderData-
>exec status code == eOK));
}

```

```

c = wsprintf(szForm,
    "<HTML><HEAD><TITLE>TPC-C New
Order</TITLE></HEAD><BODY>" 
    "<FORM ACTION=\"tpcc.dll\" "
METHOD="GET" >
    "<INPUT TYPE=\"hidden\" "
NAME="STATUSID" VALUE="%d">
    "<INPUT TYPE=\"hidden\" "
NAME="ERROR" VALUE="0">
    "<INPUT TYPE=\"hidden\" "
NAME="FORMID" VALUE="%d" " 
    "<INPUT TYPE=\"hidden\" "
NAME="TERMID" VALUE="%d" " 
    "<INPUT TYPE=\"hidden\" "
NAME="SYNCID" VALUE="%d" " 
    "<PRE><font face=\"Courier\">
New Order<BR>" 
        , bValid ? 0 : ERR_BAD_ITEM_ID,
NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermid].iSyncId);

if ( bInput )
{
    c += wsprintf(szForm+c,
"Warehouse: %6.6d ", Term.pClientData[iTermId].w_id
);

    strcpy( szForm+c,
            "District: <INPUT
NAME=\"DID*\" SIZE=1>
Date:<BR>" 
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
Credit: %Disc:<BR>" 
                    "Order Number:
Number of Lines: W_tax: D_tax:<BR>
<BR>" 
                        " Supp_W Item_Id Item
Name Qty Stock B/G Price
Amount<BR>" 
                            "<INPUT
NAME=\"SP00*\" SIZE=4> <INPUT NAME=\"IID00*\""
SIZE=6>
                            "<INPUT
NAME=\"Qty00*\" SIZE=1><BR>" 
                                "<INPUT
NAME=\"SP01*\" SIZE=4> <INPUT NAME=\"IID01*\""
SIZE=6>
                                "<INPUT
NAME=\"Qty01*\" SIZE=1><BR>" 
                                    "<INPUT
NAME=\"SP02*\" SIZE=4> <INPUT NAME=\"IID02*\""
SIZE=6>
                                    "<INPUT
NAME=\"Qty02*\" SIZE=1><BR>" 
                                        "<INPUT
NAME=\"SP03*\" SIZE=4> <INPUT NAME=\"IID03*\""
SIZE=6>
                                        "<INPUT
NAME=\"Qty03*\" SIZE=1><BR>" 
                                            "<INPUT
NAME=\"SP04*\" SIZE=4> <INPUT NAME=\"IID04*\""
SIZE=6>
                                            "<INPUT
NAME=\"Qty04*\" SIZE=1><BR>" 
                                                "<INPUT
NAME=\"SP05*\" SIZE=4> <INPUT NAME=\"IID05*\""
SIZE=6>

```

```

                                                "<INPUT
NAME=\"Qty05*\" SIZE=1><BR>" 
                                                    "<INPUT
NAME=\"SP06*\" SIZE=4> <INPUT NAME=\"IID06*\""
SIZE=6>
                                                    "<INPUT
NAME=\"Qty06*\" SIZE=1><BR>" 
                                                        "<INPUT
NAME=\"SP07*\" SIZE=4> <INPUT NAME=\"IID07*\""
SIZE=6>
                                                        "<INPUT
NAME=\"Qty07*\" SIZE=1><BR>" 
                                                            "<INPUT
NAME=\"SP08*\" SIZE=4> <INPUT NAME=\"IID08*\""
SIZE=6>
                                                            "<INPUT
NAME=\"Qty08*\" SIZE=1><BR>" 
                                                                "<INPUT
NAME=\"SP09*\" SIZE=4> <INPUT NAME=\"IID09*\""
SIZE=6>
                                                                "<INPUT
NAME=\"Qty09*\" SIZE=1><BR>" 
                                                                    "<INPUT
NAME=\"SP10*\" SIZE=4> <INPUT NAME=\"IID10*\""
SIZE=6>
                                                                    "<INPUT
NAME=\"Qty10*\" SIZE=1><BR>" 
                                                                        "<INPUT
NAME=\"SP11*\" SIZE=4> <INPUT NAME=\"IID11*\""
SIZE=6>
                                                                        "<INPUT
NAME=\"Qty11*\" SIZE=1><BR>" 
                                                                            "<INPUT
NAME=\"SP12*\" SIZE=4> <INPUT NAME=\"IID12*\""
SIZE=6>
                                                                            "<INPUT
NAME=\"Qty12*\" SIZE=1><BR>" 
                                                                                "<INPUT
NAME=\"SP13*\" SIZE=4> <INPUT NAME=\"IID13*\""
SIZE=6>
                                                                                "<INPUT
NAME=\"Qty13*\" SIZE=1><BR>" 
                                                                                    "<INPUT
NAME=\"SP14*\" SIZE=4> <INPUT NAME=\"IID14*\""
SIZE=6>
                                                                                    "<INPUT
NAME=\"Qty14*\" SIZE=1><BR>" 
                                                                                        "Execution Status:
Total:<BR>" 
                            "</font></PRE><HR>" 
                            "<INPUT TYPE=\"submit\""
NAME="CMD" VALUE="Process" >
                            "<INPUT TYPE=\"submit\""
NAME="CMD" VALUE="Menu" >
                            "</FORM></HTML>" 
);
}
else
{
    c += wsprintf(szForm+c,
"Warehouse: %6.6d District: %2.2d
Date: ", 
                    pNewOrderData->w_id,
                    pNewOrderData->d_id);

    if ( bValid )
    {
        c += wsprintf(szForm+c,
"%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
pNewOrderData->o_entry_d.day,

```

```

pNewOrderData->o_entry_d.month,
pNewOrderData->o_entry_d.year,
pNewOrderData->o_entry_d.hour,
pNewOrderData->o_entry_d.minute,
pNewOrderData->o_entry_d.second);
}

c += wsprintf(szForm+c,
"<BR>Customer: %4.4d Name: %-16s Credit: %-2s",
pNewOrderData->c_id,
pNewOrderData->c_last, pNewOrderData->c_credit);

if ( bValid )
{
    c += sprintf(szForm+c,
"%&Disc: %5.2f <BR>" 
        "Order Number: %8.8d Number of Lines:
%2.2d W_tax: %5.2f D_tax: %5.2f <BR> <BR>" 
            " Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>",
100.0*pNewOrderData->c_discount,
pNewOrderData->o_id,
pNewOrderData->o.ol_cnt,
pNewOrderData->w_tax,
pNewOrderData->d_tax);
100.0 *
pNewOrderData->w_tax,
100.0 *

for(i=0;
i<pNewOrderData->o.ol_cnt; i++)
{
    c +=
sprintf(szForm+c, "%6.6d %6.6d %-24s %2.2d
%3.3d %1.1s %6.2f %7.2f <BR>",
pNewOrderData->OL[i].ol_supply_w_id,
pNewOrderData->OL[i].ol_i_id,
pNewOrderData->OL[i].ol_i_name,
pNewOrderData->OL[i].ol_quantity,
pNewOrderData->OL[i].ol_stock,
pNewOrderData->OL[i].ol_brand_generic,
pNewOrderData->OL[i].ol_i_price,
pNewOrderData->OL[i].ol_amount );
}
```

```

        }
    else
    {
        c += wsprintf(szForm+c,
                      "$Disc:<BR>"
                      "Order
Number: %8.8d Number of Lines:          W_tax:
D_tax:<BR> <BR>"                                " Supp_W
Item_Id  Item Name          Qty Stock B/G
Price     Amount<BR>"                                ,
pNewOrderData->o_id);

                i = 0;
            }

            strncpy( szForm+c, szBR, (15-i)*5
);
            c += (15-i)*5;

            if ( bValid )
                c += sprintf(szForm+c,
"Execution Status: Transaction committed.
Total: $%8.2f ",

pNewOrderData->total_amount);
            else
                c += wsprintf(szForm+c,
"Execution Status: Item number is not valid.
Total:");
            strcpy(szForm+c,
"
<BR></font></PRE><HR>"                                "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..NewOrder..\">"                  "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Payment..\">"                   "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Delivery..\">"                  "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Order_Status..\">"               "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Stock_Level..\">"                 "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Exit..\">"                       "<FORM></HTML>" );
        }
    }

/* FUNCTION: MakePaymentForm
 *
 * COMMENTS:      The internal client buffer is
 * created when the terminal id is assigned and should
 * not
 *                  be freed
 * except when the client terminal id is no longer
 * needed.
 */

```

```

void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm)
{
    int c;

    c = wsprintf(szForm,
                  "<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"                  "<INPUT ACTION=\"tpcc.dll\"
METHOD=\"GET\">"                                "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%0\"
"                                     "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"%0\"
"                                     "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\"
"                                     "<INPUT TYPE=\"hidden\"
NAME=\"TERMID\" VALUE=\"%d\"
"                                     "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\"
"                                     "<PRE><font face=\"Courier\"
Payment<BR>"                                "Date: "
                                         , PAYMENT_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

    if ( !bInput )
    {
        c += wsprintf(szForm+c, "%2.2d-
$2.2d-%4.4d %2.2d:%2.2d:%2.2d",
                     pPaymentData-
>h_date.day,
                     pPaymentData-
>h_date.month,
                     pPaymentData-
>h_date.year,
                     pPaymentData-
>h_date.hour,
                     pPaymentData-
>h_date.minute,
                     pPaymentData-
>h_date.second);
    }

    if ( bInput )
    {
        c += wsprintf(szForm+c,
                      "<BR> <BR>Warehouse:
%6.6d"                                "Customer: <INPUT
NAME=\"DID*\" SIZE=1><BR> <BR> <BR>"                  "Cust-Warehouse: <INPUT
NAME=\"CID*\" SIZE=4>"                         "Cust-District: <INPUT
NAME=\"CWI*\" SIZE=4> "                           "Name:
<INPUT NAME=\"CDI*\" SIZE=1><BR>"                  "<INPUT NAME=\"CLT*\" SIZE=16>
Since:<BR>"                                     "Credit:<BR>" );
    }
}

```

```

Disc:<BR>"                                "
Phone:<BR> <BR>"                                "Amount Paid:
$<INPUT NAME=\"HAM*\" SIZE=7>           New Cust-
Balance:<BR>"                                "Credit Limit:<BR>
<BR>Cust-Data: <BR> <BR> <BR> <BR>
<BR></font></PRE><HR>"                                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\"><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"                  "</BODY></FORM></HTML>"

Term.pClientData[iTermId].w_id';
}
else
{
    c += wsprintf(szForm+c,
                  "<BR> <BR>Warehouse:
%6.6d"                                District: %2.2d<BR>
"%-20s"                                         "%-20s
%-20s<BR>"                                "%-20s
%-20s<BR>"                                "%-20s
%-20s %-2s %5.5s-%4.4s
%-20s %-2s %5.5s-%4.4s<BR> <BR>"                  "Customer: %4.4d Cust-
Warehouse: %6.6d Cust-District: %2.2d<BR>
"Name: %-16s %-2s %-
16s Since: %2.2d-%2.2d-%4.4d<BR>"                  "%-20s
Credit: %-2s<BR>"

Term.pClientData[iTermId].w_id', pPaymentData->d_id
, pPaymentData-
>w_street_1, pPaymentData->d_street_1
, pPaymentData-
>w_street_2, pPaymentData->d_street_2
, pPaymentData->w_state, pPaymentData->w_city,
pPaymentData->w_zip5
, pPaymentData->d_city,
pPaymentData->d_state, pPaymentData->d_zip,
pPaymentData->d_zip5
, pPaymentData->c_id,
pPaymentData->c_w_id, pPaymentData->c_d_id
, pPaymentData-
>c_first, pPaymentData->c_middle, pPaymentData-
>c_last
, pPaymentData-
>c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
, pPaymentData-
>c_street_1, pPaymentData->c_credit
);

    c += sprintf(szForm+c,
                  "             %-20s
%%Disc: %5.2f<BR>",

```

```

>c_street_2, 100.0*pPaymentData->c_discount);

c += wsprintf(szForm+c,
               " %-20s %-2s
%5.5s-%4.4s      Phone: %6.6s-%3.3s-%3.3s-%4.4s<BR>
<BR>",
               pPaymentData->c_state, pPaymentData->c_zip,
               pPaymentData->c_zip+5,           pPaymentData->c_city,
               pPaymentData->c_phone+6, pPaymentData->c_phone+9,
               pPaymentData->c_phone+12 );

c += sprintf(szForm+c,
               "Amount Paid:
$%7.2f      New Cust-Balance: $%14.2f<BR>"           "Credit Limit:
$%13.2f<BR> <BR>"                                     ,
               pPaymentData->h_amount, pPaymentData->c_balance           ,
               pPaymentData->c_credit_lim           );
               );

if ( pPaymentData->c_credit[0] == 'B' && pPaymentData->c_credit[1] == 'C' )
               c += wsprintf(szForm+c,
               "Cust-Data: %-50.50s<BR>             %-50.50s<BR>             %-50.50s<BR>",

pPaymentData->c_data, pPaymentData->c_data+50, pPaymentData->c_data+100, pPaymentData->c_data+150 );
               else
               strcpy(szForm+c, "Cust-
Data: <BR> <BR> <BR> <BR>");               strcat(szForm,           "
<BR></font></PRE><HR>

        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"...NewOrder..\">"

        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"...Payment..\">"

        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"...Delivery..\">"

        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"...Order-Status..\">"

        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"...Stock-Level..\">"

        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"...Exit..\">"

        "</BODY></FORM></HTML>");

}

```

```

    " <HR> <INPUT
TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\"Process\"></INPUT
TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\\"Menu\\\">
    "</BODY></FORM></HTML>"
```

);
 }
 else
 {
 c += wsprintf(szForm+c,
 "District: %2.2d
"
 "Customer: %4.4d
Name: %-16s %-2s %-16s
",
pOrderStatusData->c_id,
pOrderStatusData-
>c_first, pOrderStatusData->c_middle,
pOrderStatusData->c_last);

 c += sprintf(szForm+c, "Cust-
Balance: \$%9.2f

",
pOrderStatusData-
>c_balance);

 c += wsprintf(szForm+c,
 "Order-Number: %8.8d
Entry-Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d
Carrier-Number: %2.2d
"
 "Supply-W Item-Id
Qty Amount Delivery-Date
",
pOrderStatusData->o_id,
pOrderStatusData-
>o_entry_d.day,
pOrderStatusData-
>o_entry_d.month,
pOrderStatusData-
>o_entry_d.year,
pOrderStatusData-
>o_entry_d.hour,
pOrderStatusData-
>o_entry_d.minute,
pOrderStatusData-
>o_entry_d.second,
pOrderStatusData-
>o_carrier_id);

 for(i=0; i< pOrderStatusData-
>o.ol_cnt; i++)
 {
 c += sprintf(szForm+c,
" %6.6d %6.6d %2.2d \$%8.2f %2.2d-
%2.2d-%4.4d
",
pOrderStatusData->OL[i].ol_supply_w_id,
pOrderStatusData->OL[i].ol_i_id,
pOrderStatusData->OL[i].ol_quantity,
pOrderStatusData->OL[i].ol_amount,
pOrderStatusData->OL[i].ol_delivery_d.day,

```

    pOrderStatusData-
>OL[i].ol_delivery_d.month,
    pOrderStatusData-
>OL[i].ol_delivery_d.year);
}

        strncpy( szForm+c, szBR, (15-i)*5
);

        c += (15-i)*5;
        strcpy(szForm+c,
"  

</font><PRE><HR><INPUT TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\\"..NewOrder..\\">
                                "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\\"..Payment..\\">
                                "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\\"..Delivery..\\">
                                "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\\"..Order-Status..\\">
                                "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\\"..Stock-Level..\\">
                                "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\" VALUE=\\"..Exit..\\">
                                "</BODY></FORM></HTML>" );
};

}

/* FUNCTION: MakeDeliveryForm
 *
 * COMMENTS:      The internal client buffer is
 created when the terminal id is assigned and should
 not
 *
 *                                     be freed
 except when the client terminal id is no longer
 needed.
 */
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm)
{
    int          c;

    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C
Delivery</TITLE></HEAD><BODY>"
        "<FORM ACTION=\\"tpcc.dll\\" METHOD=\\"GET\\\">
                                "<INPUT TYPE=\\"hidden\\" NAME=\\"STATUSID\\" VALUE=%d\\\">
                                "<INPUT TYPE=\\"hidden\\" NAME=\\"ERROR\\" VALUE=\\"0\\\">
                                "<INPUT TYPE=\\"hidden\\" NAME=\\"FORMID\\" VALUE=%d\\\">
                                "<INPUT TYPE=\\"hidden\\" NAME=\\"TERMID\\" VALUE=%d\\\">
                                "<INPUT TYPE=\\"hidden\\" NAME=\\"SYNCID\\" VALUE=%d\\\">
                                "<PRE><font face=\\"Courier\\\">
Delivery<BR>"
```

```

        "Warehouse: %6.6d<BR> <BR>",
        (!bInput && !(pDeliveryData-
>exec_status_code != eOK)) ? ERR_TYPE_DELIVERY_POST :
0,
                DELIVERY_FORM, iTermId,
Term.pClientData[iTermId].iSyncID,
Term.pClientData[iTermId].w_id);

        if ( bInput )
{
            strcpy( szForm+c,
                    "Carrier Number: <INPUT
NAME=\\"OCD*\\\" SIZE=1><BR> <BR>
"Execution Status: <BR>
<BR> <BR> <BR> <BR> <BR> <BR>">
" <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE><HR>">
" <INPUT TYPE=\\"submit\\""
NAME=\\"CMD\\\" VALUE=\\"Process\\\"">
" <INPUT TYPE=\\"submit\\""
NAME=\\"CMD\\\" VALUE=\\"Menu\\\"">
" </BODY></FORM></HTML>" );
}
        else
{
            wsprintf( szForm+c,
                    "Carrier Number:
%2.2d<BR> <BR>">
"Execution Status: %s
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>">
" <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE>">
" <HR><INPUT
TYPE=\\"submit\\" NAME=\\"CMD\\\" VALUE=\\"..NewOrder..\\\"">
" <INPUT TYPE=\\"submit\\""
NAME=\\"CMD\\\" VALUE=\\"..Payment..\\\"">
" <INPUT TYPE=\\"submit\\""
NAME=\\"CMD\\\" VALUE=\\"..Delivery..\\\"">
" <INPUT TYPE=\\"submit\\""
NAME=\\"CMD\\\" VALUE=\\"..Order-Status..\\\"">
" <INPUT TYPE=\\"submit\\""
NAME=\\"CMD\\\" VALUE=\\"..Stock-Level..\\\"">
" <INPUT TYPE=\\"submit\\""
NAME=\\"CMD\\\" VALUE=\\"..Exit..\\\"">
" </BODY></FORM></HTML>" );
}
        pDeliveryData-
>o_carrier_id,
                (pDeliveryData-
>exec_status_code == eOK) ? "Delivery has been
queued." : "Delivery Post Failed "
);
}
}

/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE: This function gets and validates
the input data from the new order form
*           filling in the required
input variables. it then calls the SQLNewOrder

```

```

*                                     transaction, constructs
the output form and writes it back to client
*                                     browser.
*/
/* ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
   *pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA          pNewOrder;

    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();

    ZeroMemory(pNewOrder,
sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id =
Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString,
pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder,
OUTPUT_FORM, szBuffer );
}

/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE:      This function gets and validates
the input data from the payment form
*                           filling in the required
input variables. It then calls the SQLPayment
*                           transaction, constructs
the output form and writes it back to client
*                           browser.
*
* ARGUMENTS:      EXTENSION_CONTROL_BLOCK
   *pECB      passed in structure pointer from
inetsrv.
*                           int

   iTermId   client browser terminal id
*/
/* ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
   *pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA          pPayment;

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id =
Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString,
pPayment);
}

```

```

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE: This function gets and validates
the input data from the Order Status
*           form filling in the
required input variables. It then calls the
*           SQLOrderStatus
transaction, constructs the output form and writes it
*           back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*           *pECB passed in structure pointer from
inetsrv.
*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus,
sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id =
Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString,
pOrderStatus);

    Term.pClientData[iTermId].pTxn-
>OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE: This function gets and validates
the input data from the delivery form
*           filling in the required
input variables. It then calls the PostDeliveryInfo
*           Api, The client is then
informed that the transaction has been posted.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*           *pECB passed in structure pointer from
inetsrv.

```

```

*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB->lpszQueryString;
    PDELIVERY_DATA pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    ZeroMemory(pDelivery,
sizeof(DELIVERY_DATA));
    pDelivery->w_id =
Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id =
GetIntKeyValue(&ptr, "OCD**",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALIDID);
    if ( pDelivery->o_carrier_id > 10 || 
pDelivery->o_carrier_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if ( dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery-
>w_id, pDelivery->o_carrier_id) )
            pDelivery-
>exec_status_code = eDeliveryFailed;
        else
            pDelivery-
>exec_status_code = eOK;
    }
    else // delivery is done synchronously if
no delivery threads configured
        Term.pClientData[iTermId].pTxn-
>Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
*
* PURPOSE: This function gets and validates
the input data from the Stock Level
*           form filling in the
required input variables. It then calls the
*           SQLStockLevel
transaction, constructs the output form and writes it
*           back to client browser.
*
```

```

* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*           *pECB passed in structure pointer from
inetsrv.
*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB-
>lpszQueryString;

    PSTOCK_LEVEL_DATA pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel,
sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id =
Term.pClientData[iTermId].w_id;
    pStockLevel->d_id =
Term.pClientData[iTermId].d_id;

    pStockLevel->threshold =
GetIntKeyValue(&ptr, "TT**",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALIDID);
    if ( pStockLevel->threshold >= 100 || 
pStockLevel->threshold < 0 )
        throw new CWEBCLNT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn-
>StockLevel();

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
*
* PURPOSE: This function extracts and
validates the new order form data from an http
command string.
*
* ARGUMENTS: LPSTR lpszQueryString client
browser http command string
*
*           NEW_ORDER_DATA *pNewOrderData
pointer to new order data structure
*
*/
```

```

void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData)
{
    char      szTmp[26];
    int          i;
    short     items;
    int          ol_i_id, ol_quantity;
    char      *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6]
= {
        { "SP00*", "SP01*", "SP02*",
"SP03*", "SP04*", "SP05*", "SP06*", "SP07*",
"SP08*", "SP09*", "SP10*", "SP11*", "SP12*",
"SP13*", "SP14*" },
        static char
szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "IID00*", "IID01*", "IID02*",
"IID03*", "IID04*", "IID05*", "IID06*", "IID07*",
"IID08*", "IID09*", "IID10*", "IID11*", "IID12*",
"IID13*", "IID14*" },
        static char
szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "Qty00*", "Qty01*", "Qty02*",
"Qty03*", "Qty04*", "Qty05*", "Qty06*", "Qty07*",
"Qty08*", "Qty09*", "Qty10*", "Qty11*", "Qty12*",
"Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_NEORDER_FORM_MISSING_DID,
ERR_NEORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr,
"CID*", ERR_NEORDER_CUSTOMER_KEY,
ERR_NEORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS;
i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp,
sizeof(szTmp), ERR_NEORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp)
)
                throw new
CWEBCLNT_ERR( ERR_NEORDER_SUPPW_INVALID );
            pNewOrderData-
>OL[items].ol_supply_w_id = atoi(szTmp);

            ol_i_id =
pNewOrderData->OL[items].ol_i_id =
GetIntKeyValue(&ptr, szIID[i],
ERR_NEORDER_MISSING_IID_KEY,
ERR_NEORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999
|| ol_i_id < 1 )

```

```

throw new
CWEBCLNT_ERR( ERR_NEORDER_ITEMID_RANGE );
ol_quantity =
pNewOrderData->OL[items].ol_quantity =
GetIntKeyValue(&ptr, szQty[i],
ERR_NEORDER_MISSING_QTY_KEY,
ERR_NEORDER_QTY_INVALID);
if ( ol_quantity > 99
|| ol_quantity < 1 )
throw new
CWEBCLNT_ERR( ERR_NEORDER_QTY_RANGE );
items++;
else
{
    // nothing entered for
supply warehouse, so item id and qty must also be
blank
    GetKeyValue(&ptr,
szIID[i], szTmp, sizeof(szTmp),
ERR_NEORDER_MISSING_IID_KEY);
    if ( szTmp[0] )
throw new
CWEBCLNT_ERR( ERR_NEORDER_ITEMID_WITHOUT_SUPPW );
    GetKeyValue(&ptr,
szQty[i], szTmp, sizeof(szTmp),
ERR_NEORDER_MISSING_QTY_KEY);
    if ( szTmp[0] )
throw new
CWEBCLNT_ERR( ERR_NEORDER_QTY_WITHOUT_SUPPW );
}
if ( items == 0 )
throw new CWEBCLNT_ERR(
ERR_NEORDER_NOITEMS_ENTERED );
pNewOrderData->o.ol_cnt = items;
}

/* FUNCTION: GetPaymentData
*
* PURPOSE: This function extracts and
validates the payment form data from an http command
string.
*
* ARGUMENTS: LPSTR
lpszQueryString           client
browser http command string
*           *pPaymentData           PAYMENT_DATA
payment data structure
*/
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData)
{
    char      szTmp[26];
    char      *ptr = lpszQueryString;
    BOOL     bCustIdBlank;
    int          iLen;

```

```

pPaymentData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
if ( szTmp[0] == 0 )
{
    bCustIdBlank = TRUE;
    pPaymentData->c_id = 0;
}
else
{
    // parse customer id and verify
that last name was NOT entered
    bCustIdBlank = FALSE;
    if ( !IsNumeric(szTmp) )
throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
    pPaymentData->c_id = atoi(szTmp);
}

pPaymentData->c_w_id = GetIntKeyValue(&ptr,
"CWI*", ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
pPaymentData->c_d_id = GetIntKeyValue(&ptr,
"CDI*", ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_CDI_INVALID);

if ( bCustIdBlank )
{
    // customer id is blank, so last
name must be entered
    GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
    if ( szTmp[0] == 0 )
throw new CWEBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );

_strupr( szTmp );
if ( strlen(szTmp) >
LAST_NAME_LEN )
throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );
strcpy(pPaymentData->c_last,
szTmp);
// pad with spaces so that the
client layer doesn't have to do it
// before passing parameters to
stored procedure
iLen = strlen(pPaymentData-
>c_last);
memset(pPaymentData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
pPaymentData-
>c_last[LAST_NAME_LEN] = 0;
}
else
{
    // parse customer id and verify
that last name was NOT entered
    GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
    if ( szTmp[0] != 0 )

```

```

        throw new CWEBCLNTE_ERR(
ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
    if (!IsDecimal(szTmp))
        throw new CWEBCLNTE_ERR(
ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
        throw new CWEBCLNTE_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
 */
* PURPOSE: This function extracts and
validates the payment form data from an http command
string.
*/
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData)
{
    char      szTmp[26];
    char      *ptr = lpszQueryString;
    int       iLen;

    pOrderStatusData->d_id =
GetIntKeyValue(&ptr, "DID",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID",
szTmp, sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last
name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT",
szTmp, sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNTE_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(szTmp) >
LAST_NAME_LEN )
            throw new CWEBCLNTE_ERR(
ERR_ORDERSTATUS_CLT_RANGE );

        strcpy(pOrderStatusData->c_last,
szTmp);
        // pad with spaces so that the
client layer doesn't have to do it
        // before passing parameters to
stored procedure
        iLen = strlen(pOrderStatusData-
>c_last);
        memset(pOrderStatusData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
    }
}

```

```

        pOrderStatusData-
>c_last[LAST_NAME_LEN] = 0;
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNTE_ERR(
ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id =
atoi(szTmp);
        GetKeyValue(&ptr, "CLT",
szTmp, sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCLNTE_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }

/* FUNCTION: BOOL IsNumeric(char *ptr)
 */
* PURPOSE: This function determines if a
string is numeric. It fails if any characters other
than numeric and null
terminator are present.
*
* ARGUMENTS:     char
*                  *ptr     pointer to string to check.
*
* RETURNS:          BOOL     FALSE     if
string is not all numeric
*
*                  TRUE      if string contains only numeric
characters i.e. '0' - '9'
*/
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
 */
* PURPOSE: This function determines if a
string is a non-negative decimal value.
* It fails if any characters other than a
series of numbers followed by
* a decimal point,
another series of numbers, and a null terminator are
present.
*
* ARGUMENTS:     char
*                  *ptr     pointer to string to check.
*
* RETURNS:          BOOL     FALSE     if
string is not a valid non-negative decimal value

```

```

*          TRUE      if string is OK
*/
BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if ( dotptr == NULL )
        // no decimal point, so just
check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace
decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if ( *(dotptr+1) == 0 )
        return FALSE; // nothing but a
decimal point is bad
    else
        bValid = TRUE;

    if ( *(dotptr+1) != 0 )
        // check text after decimal point
        bValid &= IsNumeric(dotptr+1);

    *dotptr = '.'; // replace decimal point
    return bValid;
}

```

tpcc.def

LIBRARY TPCC.DLL

EXPORTS

```

GetExtensionVersion @1
HttpExtensionProc @2
TerminateExtension @3

```

tpcc.h

```

/* FILE:           TPCC.H
   *               Microsoft
TPC-C Kit Ver. 4.20.000
   *               Copyright
Microsoft, 1999
   *               All Rights Reserved
   *
   *               Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99

```

```

/*
 * PURPOSE: Header file for ISAPI TPCC.DLL,
 defines structures and functions used in the isapi
 tpcc.dll.
 */
/*  

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE 101
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#define TP_MAX_RETRIES 50

//note that the welcome form must be processed first
as terminal ids assigned here, once the
//terminal id is assigned then the forms can be
processed in any order.
#define WELCOME_FORM
    1
        //beginning form no term id assigned, form
id
#define MAIN_MENU_FORM
    2
        //term id assigned main menu form id
#define NEW_ORDER_FORM
    3
        //new order form id
#define PAYMENT_FORM
    4
        //payment form id
#define DELIVERY_FORM
    5
        //delivery form id
#define ORDER_STATUS_FORM
    6
        //order
status id
#define STOCK_LEVEL_FORM
    7
        //stock level
form id

//This macro is used to prevent the compiler error
unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _CLIENTDATA
{
    int iNextFree; //index of
next free element or -1 if this entry in use.
    int w_id; //warehouse
    id assigned at welcome form
}

```

```

int d_id; //district id
assigned at welcome form

int iSyncId; //synchronization id
int iTickCount; //time of
last access;

CTPCC_BASE *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational
interface for terminal id support
typedef struct _TERM
{
    int iNumEntries; //total allocated terminal array entries
    int iFreeList; //next available terminal array element or
-1 if none
    int iMasterSyncId; //synchronization id
    CLIENTDATA *pClientData; //pointer to
allocated client data
} TERM;

typedef TERM *PTERM; //pointer to
terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADDLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,
    ERR_NEORDER_CUSTOMER_INVALID,
    ERR_NEORDER_CUSTOMER_KEY,
    ERR_NEORDER_DISTRICT_INVALID,
    ERR_NEORDER_FORM_MISSING_DID,
    ERR_NEORDER_ITEMID_INVALID,
    ERR_NEORDER_ITEMID_RANGE,
    ERR_NEORDER_QTY_INVALID,
    ERR_NEORDER_QTY_RANGE,
    ERR_NEORDER_QTY_WITHOUT_SUPPW,
    ERR_NEORDER_SUPPW_INVALID,
    ERR_NO_SERVER_SPECIFIED,
    ERR_ORDERSTATUS_CID_AND_CLT,
    ERR_ORDERSTATUS_CID_INVALID,
    ERR_ORDERSTATUS_CLT_RANGE,
    ERR_ORDERSTATUS_DID_INVALID,
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    ERR_PAYMENT_CDI_INVALID,
    ERR_PAYMENT_CID_AND_CLT,
    ERR_PAYMENT_CUSTOMER_INVALID,
    ERR_PAYMENT_CWI_INVALID,
    ERR_PAYMENT_DISTRICT_INVALID,
    ERR_PAYMENT_HAM_INVALID,
    ERR_PAYMENT_HAM_RANGE,
    ERR_PAYMENT_LAST_NAME_TO_LONG,
    ERR_PAYMENT_MISSING_CDI_KEY,
    ERR_PAYMENT_MISSING_CID_CLT,
    ERR_PAYMENT_MISSING_CID_KEY,
    ERR_PAYMENT_MISSING_CLT,
    ERR_PAYMENT_MISSING_CLT_KEY,
    ERR_PAYMENT_MISSING_CWI_KEY,
    ERR_PAYMENT_MISSING_DID_KEY,
    ERR_PAYMENT_MISSING_HAM_KEY,
    ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
    ERR_STOCKLEVEL_THRESHOLD_INVALID,
    ERR_STOCKLEVEL_THRESHOLD_RANGE,
    ERR_VERSION_MISMATCH,
    ERR_W_ID_INVALID
};

class CWEBCNT_ERR : public CBaseErr
{
public:
    CWEBCNT_ERR(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    }
    CWEBCNT_ERR(WEBERROR Err, char
*szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
szTextDetail );
    }
}

```

```

dwSystemErr;
{
    m_SystemErr =
    m_szErrorText = NULL;
}

~CWEBCLNT_ERR()
{
    if (m_szTextDetail != NULL)
        delete []
m_szTextDetail;
    if (m_szErrorText != NULL)
        delete []
m_szErrorText;
}

WEBERROR m_Error;
char *m_szTextDetail; // char
*m_szErrorText;
DWORD m_SystemErr;

int ErrorType() { return
ERR_TYPE_WEBDLL; }
char *ErrorTypeStr() { return
"WEBCLIENT"; }
int ErrorNum() { return m_Error; }
char *ErrorText();
};

//These constants have already been defined in
engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6
//used to record a warning into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncid);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int
iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err);

```

```

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(long w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);
// Separate function to be able to use Win32
exception handling in
// HttpExtensionProc.
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId);

```

tpcc.rc

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
///////////////////////////////
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

///////////////////////////////
#ifndef APSTUDIO_READONLY_SYMBOLS
#endif
// English (U.S.) resources
#if !defined(AFX_RESOURCE_DLL) || !defined(AFX_TARG_ENU)
#define _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifndef _MAC
///////////////////////////////
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#endif // _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904b0"
BEGIN
VALUE "Comments", "TPC-C HTML DLL"
Server\0
VALUE "CompanyName", "Microsoft\0"
VALUE "FileDescription", "TPC-C HTML DLL"
Server\0"
VALUE "FileVersion", "0, 4, 0, 0\0"
VALUE "InternalName", "tpcc\0"
VALUE "LegalCopyright", "Copyright ©
1997\0"
VALUE "OriginalFilename", "tpcc.dll\0"
VALUE "ProductName", "Microsoft tpcc\0"
VALUE "ProductVersion", "0, 4, 0, 0\0"
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200
END
#endif
#endif // !_MAC

```

```

#ifndef APSTUDIO_INVOKED
//////////////\//////////////\//////////////\//////////////\//////////////\//////////////
// TEXTINCLUDE
// TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include ""afxres.h""\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

//////////////\//////////////\//////////////\//////////////\//////////////\//////////////
// Dialog
//

IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON    "OK",IDOK,129,7,50,14
    PUSHBUTTON       "Cancel",IDCANCEL,129,24,50,14
END

//////////////\//////////////\//////////////\//////////////\//////////////\//////////////
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
#endif // APSTUDIO_INVOKED

```

```

#endif // English (U.S.) resources
//////////////\//////////////\//////////////\//////////////\//////////////\//////////////
#ifndef APSTUDIO_INVOKED
//////////////\//////////////\//////////////\//////////////\//////////////\/////////////
// Generated from the TEXTINCLUDE 3 resource.
//

//////////////\//////////////\//////////////\//////////////\//////////////\/////////////
#endif // not APSTUDIO_INVOKED



---



## tpcc_com.cpp



```

/* FILE: TPCC_COM.CPP
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * not yet
audited
*
* PURPOSE: Source file for TPC-C COM+ class
implementation.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/
/*
needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec(dllexport)

#include "...\\common\\src\\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "...\\common\\src\\error.h"
#include "...\\common\\src\\txn_base.h"
#include "...\\common\\src\\tpcc_com_errorcode.h"
#include "tpcc_com.h"

#include "...\\tpcc_com_ps\\src\\tpcc_com_ps_i.c"
#include "...\\tpcc_com_all\\src\\tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL
bSinglePool)

```


```

```

{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray =
SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray-
>pvData, 0, ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL,
COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC,
NULL, CLSCTX_SERVER, IID_ITPCC, (void
**) &m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same
component
        m_pPayment = m_pNewOrder;
        m_pStockLevel = m_pNewOrder;
        m_pOrderStatus = m_pNewOrder;
    }
    else
    {
        // use different components for
each txn
        hr =
CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **) &m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

```

```

        hr =
CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
if (FAILED(hr))
    throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_StockLevel, NULL,
CLSCXTX_SERVER, IID_ITPCC, (void **)&m_pStockLevel);
if (FAILED(hr))
    throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCXTX_SERVER, IID_ITPCC, (void **)&m_pOrderStatus);
if (FAILED(hr))
    throw new CCOMERR(hr);
}

// call setcomplete to release each
component back into pool
hr = m_pNewOrder->CallSetComplete();
if (FAILED(hr))
    throw new CCOMERR(hr);

if (!m_bSinglePool)
{
    hr = m_pPayment-
>CallSetComplete();
if (FAILED(hr))
    throw new CCOMERR(hr);

    hr = m_pStockLevel-
>CallSetComplete();
if (FAILED(hr))
    throw new CCOMERR(hr);

    hr = m_pOrderStatus-
>CallSetComplete();
if (FAILED(hr))
    throw new CCOMERR(hr);
}

CTPCC_COM::~CTPCC_COM()
{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

void CTPCC_COM::NewOrder()
{
    VARIANT             vTxn_out;

```

```

        HRESULT hr = m_pNewOrder->NewOrder(m_vTxn,
&vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::Payment()
{
    VARIANT             vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn,
&vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::StockLevel()
{
    VARIANT             vTxn_out;

    HRESULT hr = m_pStockLevel-
>StockLevel(m_vTxn, &vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )

```

```

            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::OrderStatus()
{
    VARIANT             vTxn_out;

    HRESULT hr = m_pOrderStatus-
>OrderStatus(m_vTxn, &vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}



---



## tpcc_com.h



```

/* FILE: TPCC_COM.H
 * Microsoft
* TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Header file for TPC-C COM+ class
implementation.
*
* Change history:
* 4.20.000 - first version
*/
pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec(dllexport)
#endif

class CCOMERR : public CBaseErr
{
 private:
 char m_szErrorText[64];

```


```

```

public:           // use this interface for genuine
COM errors       CCOMERR( HRESULT hr )
{
    m_hr = hr;
    m_iErrorType = 0;
    m_iError = 0;
}

// use this interface to
impersonate a non-COM error type
CCOMERR( int iErrorType, int
iError )
{
    m_iErrorType =
iErrorType;
    m_iError = iError;
    m_hr = S_OK;
}

int             m_hr;
int             m_iErrorType;
int             m_iError;

// A CCOMERR class can
impersonate another class, which happens if the error
// was not actually a COM
Services error, but was simply transmitted back via
COM.
int ErrorType()
{
    if (m_iErrorType == 0)
        return
ERR_TYPE_COM;
    else
        return
m_iErrorType;
}

char *ErrorTypeStr() { return
"COM"; }

int ErrorNum()
{
    if (m_iErrorType == 0)
        return m_hr;
    // return COM error
    else
        return
m_iError; // return impersonated error
}

char *ErrorText()
{
    if (m_hr == S_OK)
        sprintf(
m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
    else
        sprintf(
m_szErrorText, "Error: COM HRESULT %x", m_hr );
}

```

```

    return m_szErrorText;
}

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;
    // COM Interface pointers
    ITPCC*
    m_pNewOrder;
    ITPCC*
    m_pPayment;
    ITPCC*
    m_pStockLevel;
    ITPCC*
    m_pOrderStatus;
    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA      NewOrder;
            PAYMENT_DATA       Payment;
            DELIVERY_DATA      Delivery;
            STOCK_LEVEL_DATA   StockLevel;
            ORDER_STATUS_DATA  OrderStatus;
        } u;
        VARIANT m_vTxn;
    };
public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_pTxn->u.NewOrder; }
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_pTxn->u.Payment; }
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_pTxn->u.Delivery; }
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_pTxn->u.StockLevel; }
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_pTxn->u.OrderStatus; }

    void NewOrder          ();
    void Payment           ();
    void StockLevel        ();
    void OrderStatus       ();
}

```

```

void Delivery          ()
{
    throw new CCOMERR(E_NOTIMPL); // not supported
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM*
CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);



---



## tpcc_com_all. cpp


/* FILE:           TPCC_COM_ALL.CPP
 *               Microsoft
TPC-C Kit Ver. 4.20.000
 *               Copyright
Microsoft, 1999
 *               All Rights Reserved
 *
 *               Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 *               PURPOSE: Implementation for TPC-C class.
 *               Contact: Charles Levine
(clevine@microsoft.com)
 *
 *               Change history:
 *               4.20.000 - updated rev number to
match kit
 */

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADS

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it
if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>

```

```

//##include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"           //tpckit transaction
header contains definitions of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\common\src\tpcc_com_errorcode.h"
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
    OBJECT_ENTRY(CLSID_TPCC, CTPCC)
    OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
    OBJECT_ENTRY(CLSID_OrderStatus,
COrderStatus)
    OBJECT_ENTRY(CLSID_Payment, CPayment)
    OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

static HINSTANCE hLibInstanceDb = NULL;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
// Critical section to synchronize connection open
and close.
// CRITICAL_SECTION hConnectCriticalSection;
///////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID *lpReserved*)
{
    char szDlName[128];

```

```

        try
        {
            if (dwReason ==
DLL_PROCESS_ATTACH)
            {
                _Module.Init(ObjectMap,
hInstance);

                DisableThreadLibraryCalls(hInstance);

                DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;

                GetComputerName(szMyComputerName, &dwSize);

                szMyComputerName[dwSize] = 0;

                if (
ReadTPCCRegistrySettings( &Reg ) )
                    throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );
                if (Reg.eDB_Protocol ==
ODBC)
                    {
                        strcpy(
szDlName, Reg.szPath );
                        strcat(
szDlName, "tpcc_odbc.dll");
                        hLibInstanceDb = LoadLibrary( szDlName );
                        if
(hLibInstanceDb == NULL)
                            throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDlName, GetLastError() );
                        // get
function pointer to wrapper for class constructor
                        pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
                        if
(pCTPCC_ODBC_new == NULL)
                            throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDlName, GetLastError() );
                        else
                            throw new
CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL );
                        if (Reg.dwConnectDelay
> 0)
                            {
                                InitializeCriticalSection(&hConnectCriticalSection);
                            }
                        else if (dwReason ==
DLL_PROCESS_DETACH)

```

```

                            _Module.Term();
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _snprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );

    delete e;
    return FALSE;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in object DllMain"));
    return FALSE;
}

return TRUE; // OK
}

///////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE
STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
S_FALSE;
}

///////////////////////////////
// Returns a class factory to create an object of the
requested type
STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}

///////////////////////////////
// DllRegisterServer - Adds entries to the system
registry
STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

```

```

////////// DllUnregisterServer - Removes entries from the
// system registry
STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
    TEXT("tpcc_com_all.dll"));

    _sprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
                    EVENTLOG_ERROR_TYPE, // event type
                    0, // event category
                    0, // event ID
                    NULL, // current user's
SID
                    2, // strings in
lpszStrings
                    0, // no bytes of raw
data
                    (LPCTSTR *)lpszStrings, // array of
error strings
                    NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*/
char* CCOMPONENT_ERR::ErrorText(void)

```

```

{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
        "Required entries missing from registry." },
        { ERR_LOADDLL_FAILED,
        "Load of DLL failed. DLL=" },
        { ERR_GETPROCADDR_FAILED,
        "Could not map proc in DLL. GetProcAddress
error. DLL=" },
        { ERR_UNKNOWN_DB_PROTOCOL,
        "Unknown database protocol specified in
registry." },
        { 0,
        "" }
    };

    char szTmp[256];
    int i = 0;
    while (TRUE)
    {
        if (errorMsgs[i].szMsg[0] == 0)
        {
            strcpy( szTmp, "Unknown
error number." );
            break;
        }
        if (m_Error ==
errorMsgs[i].iError)
        {
            strcpy( szTmp,
errorMsgs[i].szMsg );
            break;
        }
        i++;
    }

    if (m_szTextDetail)
        strcat( szTmp, m_szTextDetail );
    if (m_SystemErr)
        wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

    m_szErrorText = new char[strlen(szTmp)+1];
    strcpy( m_szErrorText, szTmp );
    return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{

```

```

    // Pace connection close for VIA.
    //
    if (Reg.dwConnectDelay > 0)
    {
        EnterCriticalSection(&hConnectCriticalSection);
        Sleep(Reg.dwConnectDelay);

        LeaveCriticalSection(&hConnectCriticalSection);
    }

    if (m_pTxn)
    {
        delete m_pTxn;
    }

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;
    // get our object context
    HRESULT hr = CoGetObjectContext(
    IID_IObjectContext, (void **)&pObjectContext );
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

//
// called by the ctor activator
//
STDMETHODIMP CTPCC_Common::Construct(IDispatch *pUnk)
{
    // Code to access construction string, if
needed later...
    // if (!pUnk)
    // return E_UNEXPECTED;
    // IObjectConstructString * pString
    = NULL;
    // HRESULT hr = pUnk-
    >QueryInterface(IID_IObjectContextString, (void
**)&pString);
    // pString->Release();

    try
    {
        // Pace connection creation for
VIA.
        //
        if (Reg.dwConnectDelay > 0)
        {
            EnterCriticalSection(&hConnectCriticalSection);
            Sleep(Reg.dwConnectDelay);
        }
    }
}
```

```

        LeaveCriticalSection(&hConnectCriticalSection);
    }

    if (Reg.eDB_Protocol == ODBC)
        m_pTxn = pCTPCC_ODBC_new(Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword,

        szMyComputerName, Reg.szDbName,

        Reg.szSPPrefix,
Reg.bCallNoDuplicatesNewOrder );
    }
    catch (CBaseErr *e)
    {
        TCHAR szMsg[256];
        _snprintf(szMsg, sizeof(szMsg),
"%s error in CTPCC_Common::Construct, code %d: %s",
e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
        WriteMessageToEventLog( szMsg );
        delete e;
        return E_FAIL;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception in object ::Construct"));
        return E_FAIL;
    }

    return S_OK;
}

HRESULT CTPCC_Common::NewOrder(VARIANT txn_in,
VARIANT* txn_out)
{
    PNEW_ORDER_DATA      pNewOrder;
    COM_DATA             *pData;
    COM_DATA             *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
        txn_in.parray->rgsabound-
>cElements,
        txn_in.parray->rgsabound-
>cElements);

```

```

        if (txn_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*) txn_out-
>parray->pvData;
        pData = (COM_DATA*) txn_in.parray-
>pvData;
        pNewOrder = m_pTxn-
>BuffAddr_NewOrder();

        memcpy(pNewOrder, &pData-
>u.NewOrder, sizeof(NEW_ORDER_DATA));

        m_pTxn->NewOrder(); // do the actual txn

        memcpy( &pOutData->u.NewOrder,
pNewOrder, sizeof(NEW_ORDER_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
m_bCanBePooled = FALSE;

        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCOM;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::NewOrder."));
        pOutData->retval =
ERR_TYPE_LOGIC;
        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCOM;
    }
}

HRESULT CTPCC_Common::Payment(VARIANT txn_in,
VARIANT* txn_out)
{
    PPAYMENT_DATA      pPayment;
    COM_DATA             *pData;
    COM_DATA             *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
        txn_in.parray->rgsabound-
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*) txn_out-
>parray->pvData;
        pData = (COM_DATA*) txn_in.parray-
>pvData;
        pPayment = m_pTxn-
>BuffAddr_Payment();

        memcpy(pPayment, &pData-
>u.Payment, sizeof(PAYMENT_DATA));

        m_pTxn->Payment(); // do the actual txn

        memcpy( &pOutData->u.Payment,
pPayment, sizeof(PAYMENT_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
m_bCanBePooled = FALSE;

        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCOM;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::Payment."));
        pOutData->retval =
ERR_TYPE_LOGIC;
    }
}

```

```

        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }

HRESULT CTPCC_Common::StockLevel(VARIANT txin_in,
VARIANT* txin_out)
{
    PSTOCK_LEVEL_DATA pStockLevel;
    COM_DATA          *pData;
    COM_DATA          *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txin_out);
        txin_out->vt = VT_SAFEARRAY;
        txin_out->parray =
SafeArrayCreateVector( VT_UI1,
                     txin_in.parray->rgsabound-
>cElements,
                     txin_in.parray->rgsabound-
>cElements);
        if (txin_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txin_out-
>parray->pvData;
        pData = (COM_DATA*)txin_in.parray-
>pvData;
        pStockLevel = m_pTxn-
>BuffAddr_StockLevel();

        memcpy(pStockLevel, &pData-
>u.StockLevel, sizeof(STOCK_LEVEL_DATA));
        m_pTxn->StockLevel();

        memcpy( &pOutData->u.StockLevel,
pStockLevel, sizeof(STOCK_LEVEL_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
    }
}

```

```

>ErrorType()
{
    pOutData->retval = e-
    pOutData->error = e->ErrorNum();
    delete e;
    return E_TPCCCOM;
}

catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::StockLevel."));
    pOutData->retval =
ERR_TYPE_LOGIC;
    pOutData->error = 0;
    m_bCanBePooled = FALSE;
    return E_TPCCCOM;
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txin_in,
VARIANT* txin_out)
{
    PORDER_STATUS_DATA pOrderStatus;
    COM_DATA          *pData;
    COM_DATA          *pOutData;
    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txin_out);
        txin_out->vt = VT_SAFEARRAY;
        txin_out->parray =
SafeArrayCreateVector( VT_UI1,
                     txin_in.parray->rgsabound-
>cElements,
                     txin_in.parray->rgsabound-
>cElements);
        if (txin_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txin_out-
>parray->pvData;
        pData = (COM_DATA*)txin_in.parray-
>pvData;
        pOrderStatus = m_pTxn-
>BuffAddr_OrderStatus();

        memcpy(pOrderStatus, &pData-
>u.OrderStatus, sizeof(ORDER_STATUS_DATA));
        m_pTxn->OrderStatus();

        memcpy( &pOutData->u.OrderStatus,
pOrderStatus, sizeof(ORDER_STATUS_DATA));
    }
}

```

```

pOutData->retval = ERR_SUCCESS;
pOutData->error = 0;
return S_OK;
}

catch (CBaseErr *e)
{
    // check for lost database
    connection; if yes, component is toast
    if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
        m_bCanBePooled = FALSE;
}

pOutData->retval = e-
pOutData->error = e->ErrorNum();
delete e;
return E_TPCCCOM;
}

catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::OrderStatus."));
    pOutData->retval =
ERR_TYPE_LOGIC;
    pOutData->error = 0;
    m_bCanBePooled = FALSE;
    return E_TPCCCOM;
}

```

tpcc_com_all.def

```

; tpcc_com_all.def : Declares the module parameters.

LIBRARY      "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow      PRIVATE
    DllGetClassObject     PRIVATE
    DllRegisterServer     PRIVATE
    DllUnregisterServer   PRIVATE

```

tpcc_com_all.h

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oifc, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext, robust

```

```

    error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
        __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 475
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

```

```

#endif /* __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */
#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */
#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */
#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifndef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#endif /* __TPCCLib_LIBRARY_DEFINED__ */

```

```

#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring] [version] [uuid] */

EXTERN_C const IID LIBID_TPCCLib;
EXTERN_C const CLSID CLSID_TPCC;

#ifndef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-
00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifndef __cplusplus
class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-
00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifndef __cplusplus
class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-
00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifndef __cplusplus
class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-
00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifndef __cplusplus
class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-
00C04FBFE08B")
StockLevel;
#endif

#endif /* __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

#ifndef __cplusplus
}
#endif

#endif

```

tpcc_com_all.i. c

```
/* this ALWAYS GENERATED file contains the IIDs and  
CLSIDs */  
  
/* link this file in with the server and any clients  
*/  
  
/* File created by MIDL compiler version 6.00.0361  
*/  
/* at Thu Mar 16 18:21:15 2006  
*/  
/* Compiler settings for .\src\tpcc_com_all.idl:  
    Oicf, W1, Zp8, env=Win32 (32b run)  
    protocol : dce , ms_ext, c_ext, robust  
    error checks: allocation ref bounds_check enum  
stub_data  
    VC __declspec() decoration level:  
        __declspec(uuid()), __declspec(selectany),  
        __declspec(novtable)  
        DECLSPEC_UUID(), MIDL_INTERFACE()  
*/  
//@@@MIDL_FILE_HEADING( )  
  
#if !defined(_M_IA64) && !defined(_M_AMD64)  
  
#pragma warning( disable: 4049 ) /* more than 64k  
source lines */  
  
#ifdef __cplusplus  
extern "C"  
#endif  
  
#include <rpc.h>  
#include <rpcndr.h>  
  
#ifdef _MIDL_USE_GUIDDEF_  
  
#ifndef INITGUID  
#define INITGUID  
#include <guiddef.h>  
#undef INITGUID  
#else  
#include <guiddef.h>  
#endif  
  
#define  
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,  
b7,b8) \
```

```
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)  
  
#else // !_MIDL_USE_GUIDDEF_  
#ifndef __IID_DEFINED__  
#define __IID_DEFINED__  
  
typedef struct _IID  
{  
    unsigned long x;  
    unsigned short s1;  
    unsigned short s2;  
    unsigned char c[8];  
} IID;  
  
#endif // __IID_DEFINED__  
  
#ifndef CLSID_DEFINED  
#define CLSID_DEFINED  
typedef IID CLSID;  
#endif // CLSID_DEFINED  
  
#define  
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,  
b7,b8) \  
    const type name =  
{l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}  
#endif !_MIDL_USE_GUIDDEF_  
  
MIDL_DEFINE_GUID(IID,  
LIBID_TPCClib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00  
,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x  
C0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0  
0,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,  
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x0  
0,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0  
x00,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
#undef MIDL_DEFINE_GUID  
  
#ifdef __cplusplus
```

```

#else // !_MIDL_USE_GUIDDEF

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8} }

#endif ! _MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
#endif

```

```
#endif /* defined(_M_IA64) || defined(_M_AMD64) */
```

tpcc_com_errorcode.h

```

/*      FILE:          TPCC_COM_ERRORCODE.H
 *      Microsoft
TPC-C Kit Ver. 4.20.000
*                                     Copyright
Microsoft, 1999
*                               All Rights Reserved
*
*                               not yet
audited
*
* PURPOSE: Header file defining the error
code returned from ITPCC COM interface.
*
* Change history:
*           4.20.000 - first version
*/
// Error return value for methods in ITPCC interface.
// Define as 0x80042345 (decimal -2147212475).
const HRESULT E_TPCCCOM = MAKE_HRESULT
(SEVERITY_ERROR, FACILITY_ITF, 0x2345);

```

tpcc_com_ps.def

LIBRARY	"tpcc_com_ps"
EXPORTS	
	DllGetClassObject PRIVATE
	DllCanUnloadNow PRIVATE
	GetProxyDllInfo PRIVATE
	DllRegisterServer PRIVATE
	DllUnregisterServer PRIVATE

tpcc_com_ps.h

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006

```

```

*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
/*@@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );
/* interface __MIDL_itf_tpcc_com_ps_0000 */


```

```

/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object]
*/
EXTERN_C const IID IID_ITPCC;
#endif /* defined(_cplusplus) && !defined(CINTERFACE)

MIDL_INTERFACE("FEEE6AA2-84B1-11d2-BA47-
00C04FBFE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT __stdcall NewOrder(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall Payment(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall Delivery(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall StockLevel(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall OrderStatus(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall CallSetComplete(
void) = 0;
};

#else /* C style interface */

typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE *QueryInterface (
        ITPCC * This,
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void **ppvObject);
}

```

```

    ULONG ( STDMETHODCALLTYPE *AddRef )(
        ITPCC * This);
    ULONG ( STDMETHODCALLTYPE *Release )(
        ITPCC * This);
    HRESULT ( STDMETHODCALLTYPE *NewOrder )( 
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);
    HRESULT ( STDMETHODCALLTYPE *Payment )( 
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);
    HRESULT ( STDMETHODCALLTYPE *Delivery )( 
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);
    HRESULT ( STDMETHODCALLTYPE *StockLevel )( 
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);
    HRESULT ( STDMETHODCALLTYPE *OrderStatus )( 
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);
    HRESULT ( STDMETHODCALLTYPE *CallSetComplete )( 
        ITPCC * This);

    END_INTERFACE
} ITPCCVtbl;
interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl *lpVtbl;
};

#endif /* COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl->QueryInterface(This,riid,ppvObject)
#define ITPCC_AddRef(This) \
    (This)->lpVtbl->AddRef(This)
#define ITPCC_Release(This) \
    (This)->lpVtbl->Release(This)
#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lpVtbl->NewOrder(This,txn_in,txn_out)
#define ITPCC_Payment(This,txn_in,txn_out) \
    (This)->lpVtbl->Payment(This,txn_in,txn_out)

```

```

    (This)->lpVtbl -> Payment(This,txn_in,txn_out)
#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lpVtbl -> Delivery(This,txn_in,txn_out)
#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lpVtbl -> StockLevel(This,txn_in,txn_out)
#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lpVtbl -> OrderStatus(This,txn_in,txn_out)
#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl -> CallSetComplete(This)
#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);


```

```

/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long __RPC_USER
VARIANT_UserSize( unsigned long *, unsigned long ,
    VARIANT * );
unsigned char * __RPC_USER VARIANT_UserMarshal(
    unsigned long *, unsigned char *, VARIANT * );
unsigned char * __RPC_USER
VARIANT_UserUnmarshal(unsigned long *, unsigned char *,
    VARIANT * );
void __RPC_USER
VARIANT_UserFree( unsigned long *, VARIANT * );

/* end of Additional Prototypes */

#ifndef __cplusplus
#endif
#endif

```

tpcc_com_ps.idl

```

/*      FILE:          ITPCC.IDL
 *
 *      Microsoft
 *      TPC-C Kit Ver. 4.20.000
 *      Copyright
 *      Microsoft, 1999
 *          All Rights Reserved
 *
 *          not yet
 audited
 *
 *      PURPOSE: Defines the interface used by
TPCC. This interface can be implemented by C++ components.
 *
 *      Change history:
 *          4.20.000 - first version
 */
// Forward declare all types defined
interface ITPCC;
import "oaidl.idl";
import "ocidl.idl";

[
    object,
    oleautomation,
    uuid(FEEE6AA2-84B1-11d2-BA47-
00C04FBPE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
interface ITPCC : IUnknown
{
    HRESULT __stdcall NewOrder
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
    HRESULT __stdcall Payment
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
    HRESULT __stdcall Delivery
    (

```

```

[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
HRESULT __stdcall StockLevel
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall OrderStatus
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall CallSetComplete
(
);
}; // interface ITPCC

```

tpcc_com_ps_i.c

```

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:

```

```

    __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#ifndef !_MIDL_USE_GUIDDEF_
#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif // !_MIDL_USE_GUIDDEF_

```

```

#endif ! _MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID
#ifndef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64) */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win64 (32b run, appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif /* defined(_M_IA64) || defined(_M_AMD64) */

```

```

#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#ifndef !_MIDL_USE_GUIDDEF_
#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif // !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID
#ifndef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64) */

```

tpcc_com_ps_ p.c

/* this ALWAYS GENERATED file contains the proxy stub
code */

```

/* File created by MIDL compiler version 6.00.0361
 */
/* at Thu Mar 16 18:21:12 2006
 */
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf, W1, Zp8, env=Win32 (32b run)
   protocol : dce , ms_ext, c_ext
   error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()

*/
//@@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif
#pragma warning( disable: 4100 ) /* unreferenced
arguments in x86 call */
#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity*/
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REQD_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1023
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{

```

```

    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}},{2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if ! (TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this
stub because it uses these features:
#error -Oif or -Oicf, [wire_marshal] or
[user_marshal] attribute.
#error However, your C/C++ compilation flags indicate
you intend to run this app on earlier systems.
#error This app will die there with the
RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* * 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* * 3 */
        /* 8 */ NdrFcShort( 0x1c ), /* * x86 Stack
size/offset = 28 */
        /* 10 */ NdrFcShort( 0x0 ), /* * 0 */
        /* 12 */ NdrFcShort( 0x8 ), /* * 8 */
        /* 14 */ 0x7, /* * Oi2 Flags: srv must
size, clt must size, has return, */

```

```

        0x3, /* Parameter txn_in */
        /* 16 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
        /* 18 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
        /* 20 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
        /* Parameter txn_out */
        /* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
        /* 24 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
        /* 26 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */
        /* Return value */
        /* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
        /* 30 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
        /* 32 */ 0x8, /* FC_LONG */
        0x0, /* 0 */
        /* Procedure Payment */
        /* 34 */ 0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 36 */ NdrFcLong( 0x0 ), /* * 0 */
        /* 40 */ NdrFcShort( 0x4 ), /* * 4 */
        /* 42 */ NdrFcShort( 0x1c ), /* * x86 Stack
size/offset = 28 */
        /* 44 */ NdrFcShort( 0x0 ), /* * 0 */
        /* 46 */ NdrFcShort( 0x8 ), /* * 8 */
        /* 48 */ 0x7, /* * Oi2 Flags: srv must
size, clt must size, has return, */
        0x3, /* Parameter txn_in */
        /* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
        /* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
        /* 54 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
        /* Parameter txn_out */
        /* 56 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */

```

```

/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 60 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 66 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

/* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */

Old Flags: object, Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */

3 */

/* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 88 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 94 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 100 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

/* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */

```

```

0x6c, /* */

Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */

3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 122 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 128 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 134 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

/* Procedure OrderStatus */

/* 136 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */

Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
/* 144 */ N/rfcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 146 */ N/rfcShort( 0x0 ), /* 0 */
/* 148 */ N/rfcShort( 0x8 ), /* 8 */
/* 150 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */

3 */

/* Parameter txn_in */

/* 152 */ N/rfcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 154 */ N/rfcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 156 */ N/rfcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 158 */ N/rfcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 160 */ N/rfcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 162 */ N/rfcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 164 */ N/rfcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 166 */ N/rfcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 168 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

/* Procedure CallSetComplete */

/* 170 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */

Old Flags: object, Oi2 */
/* 172 */ N/rfcLong( 0x0 ), /* 0 */
/* 176 */ N/rfcShort( 0x8 ), /* 8 */
/* 178 */ N/rfcShort( 0x8 ), /* x86 Stack
size/offset = 8 */
/* 180 */ N/rfcShort( 0x0 ), /* 0 */
/* 182 */ N/rfcShort( 0x8 ), /* 8 */
/* 184 */ 0x4, /* Oi2 Flags: has
return, */
0x1, /* */

1 */

/* Return value */

/* 186 */ N/rfcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 188 */ N/rfcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 190 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

}

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        N/rfcShort( 0x0 ), /*
        0 */
        /* 2 */
    }
};

```

```

          0x12, 0x0,           /* FC_UP */
/* 4 */ NdrFcShort( 0x3ca ),      /* Offset= 970 (974) */
/* 6 */                                         /* 0x2b,           */
FC_NON_ENCAPSULATED_UNION /* 0x9,           */
                                         /* FC ULONG */
/* 8 */ 0x7,             /* Corr desc: FC USHORT */
/* */                                         /* 0x0,           */
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x2 ),   /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ),  /* 16 */
/* 16 */ NdrFcShort( 0x2f ),  /* 47 */
/* 18 */ NdrFcLong( 0x14 ),  /* 20 */
/* 22 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 24 */ NdrFcLong( 0x3 ),   /* 3 */
/* 28 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 30 */ NdrFcLong( 0x11 ),  /* 17 */
/* 34 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYT */
/* 36 */ NdrFcLong( 0x2 ),   /* 2 */
/* 40 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 42 */ NdrFcLong( 0x4 ),   /* 4 */
/* 46 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 48 */ NdrFcLong( 0x5 ),   /* 5 */
/* 52 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 54 */ NdrFcLong( 0xb ),   /* 11 */
/* 58 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 60 */ NdrFcLong( 0xa ),   /* 10 */
/* 64 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 66 */ NdrFcLong( 0x6 ),   /* 6 */
/* 70 */ NdrFcShort( 0xe8 ),  /* Offset= 232 (302) */
/* 72 */ NdrFcLong( 0x7 ),   /* 7 */
/* 76 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 78 */ NdrFcLong( 0x8 ),   /* 8 */
/* 82 */ NdrFcShort( 0xe2 ),  /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0xd ),   /* 13 */
/* 88 */ NdrFcShort( 0xf4 ),  /* Offset= 244 (332) */
/* 90 */ NdrFcLong( 0x9 ),   /* 9 */
/* 94 */ NdrFcShort( 0x100 ), /* Offset= 256 (350) */
/* 96 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 100 */ NdrFcShort( 0x10c ), /* Offset= 268 (368) */
/* 102 */ NdrFcLong( 0x24 ),  /* 36 */
/* 106 */ NdrFcShort( 0x31a ), /* Offset= 794 (900) */
/* 108 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 112 */ NdrFcShort( 0x314 ), /* Offset= 788 (900) */
/* 114 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 118 */ NdrFcShort( 0x312 ), /* 120 */
/* 124 */ NdrFcShort( 0x310 ), /* 126 */
/* 128 */ NdrFcLong( 0x4003 ), /* 130 */
/* 132 */ NdrFcLong( 0x4014 ), /* 136 */
/* 136 */ NdrFcShort( 0x30c ), /* 138 */
/* 140 */ NdrFcLong( 0x4004 ), /* 142 */
/* 144 */ NdrFcLong( 0x4005 ), /* 148 */
/* 148 */ NdrFcShort( 0x308 ), /* 150 */
/* 152 */ NdrFcLong( 0x400b ), /* 154 */
/* 156 */ NdrFcShort( 0x2f2 ), /* 156 */
/* 160 */ NdrFcShort( 0x2f0 ), /* 162 */
/* 164 */ NdrFcLong( 0x4006 ), /* 166 */
/* 168 */ NdrFcShort( 0x2fa ), /* 172 */
/* 172 */ NdrFcShort( 0x2f0 ), /* 174 */
/* 176 */ NdrFcLong( 0x4008 ), /* 178 */
/* 180 */ NdrFcShort( 0x2f2 ), /* 184 */
/* 184 */ NdrFcShort( 0x2f0 ), /* 186 */
/* 188 */ NdrFcLong( 0x4009 ), /* 190 */
/* 192 */ NdrFcShort( 0x2ee ), /* 196 */
/* 196 */ NdrFcShort( 0x2ec ), /* 198 */
/* 200 */ NdrFcLong( 0x6000 ), /* 204 */
/* 204 */ NdrFcShort( 0x2ec ), /* 208 */
/* 208 */ NdrFcShort( 0x8002 ), /* 210 */
/* 210 */ NdrFcLong( 0x12 ),  /* 214 */
/* 214 */ NdrFcShort( 0x8006 ), /* 216 */
/* 216 */ NdrFcLong( 0x13 ),  /* 220 */
/* 220 */ NdrFcShort( 0x8008 ), /* 222 */
/* 222 */ NdrFcLong( 0x15 ),  /* 226 */
/* 226 */ NdrFcShort( 0x800b ), /* 228 */
/* 228 */ NdrFcLong( 0x16 ),  /* 232 */
/* 232 */ NdrFcShort( 0x8008 ), /* 234 */
/* 234 */ NdrFcLong( 0x17 ),  /* 238 */
/* 238 */ NdrFcShort( 0x8008 ), /* 240 */
/* 240 */ NdrFcLong( 0xe ),   /* 244 */
/* 244 */ NdrFcShort( 0x2c8 ), /* 246 */
/* 246 */ NdrFcLong( 0x400e ), /* 250 */
/* 250 */ NdrFcShort( 0x2cc ), /* 252 */
/* 252 */ NdrFcLong( 0x4010 ), /* 256 */
/* 256 */ NdrFcShort( 0x2ca ), /* 258 */
/* 258 */ NdrFcLong( 0x4012 ), /* 262 */
/* 262 */ NdrFcShort( 0x286 ), /* 264 */
/* 264 */ NdrFcLong( 0x4013 ), /* 268 */
/* 268 */ NdrFcShort( 0x284 ), /* 270 */
/* 270 */ NdrFcLong( 0x4015 ), /* 274 */
/* 274 */ NdrFcShort( 0x282 ), /* 282 */
/* 282 */ NdrFcLong( 0x4017 ), /* 286 */
/* 286 */ NdrFcShort( 0x272 ), /* 288 */
/* 288 */ NdrFcLong( 0x0 ),   /* 292 */
/* 292 */ NdrFcShort( 0x0 ),   /* 294 */
/* 294 */ NdrFcLong( 0x1 ),   /* 298 */
/* 298 */ NdrFcShort( 0x0 ),   /* 300 */
/* 300 */ NdrFcShort( 0xffff ), /* 302 */
                                         /* 0x15,           */
FC_STRUCT /* 0x7,           */
/* 7 */                                         /* 8 */
/* 304 */ NdrFcShort( 0x8 ), /* 0x8 */
/* 306 */ 0xb,           /* FC_HYPER */
                                         /* 0x5b,           */
FC_END /* 0x12, 0x0,           */
/* 310 */ NdrFcShort( 0xc ), /* Offset= 12 (322) */
/* 312 */                                         /* 0x1b,           */
FC_CARRAY /* 0x1,           */
/* 1 */                                         /* 2 */
/* 314 */ NdrFcShort( 0x2 ), /* 0x9,           */
                                         /* Corr desc: FC ULONG */
/* */                                         /* 0x0,           */
/* 318 */ NdrFcShort( 0xffffc ), /* -4 */
/* 320 */ 0x6,           /* FC_SHORT */
                                         /* 0x5b,           */
FC_END /* 0x17,           */
/* 322 */                                         /* 0x3,           */
FC_CSTRUCT /* 0x3,           */
/* 3 */                                         /* 8 */
/* 324 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 326 */ NdrFcShort( 0xffff2 ), /* Offset= - 0x8, */
14 (312) /* FC_LONG */ 0x8, /* */
/* 328 */ /* FC_PAD */ 0x5b, /* */
FC_LONG /* */
/* 330 */ /* FC_PAD */ 0x5b, /* */
FC_END /* */
/* 332 */ /* */
0x2f, /* */
FC_IP /* */
0x5a, /* */
FC_CONSTANT_IID /* */
/* 334 */ NdrFcLong( 0x0 ), /* 0 */ /* */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 340 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 342 */ NdrFcShort( 0xc0 ), /* 192 */ /* */
0x0, /* */
0 */ /* */
/* 344 */ /* 0 */ /* */
0x0, /* */
0 */ /* */
/* 346 */ /* 0 */ /* */
0x0, /* */
0 */ /* */
/* 348 */ /* 0 */ /* */
0x46, /* */
70 */ /* */
/* 350 */ /* */
0x2f, /* */
FC_IP /* */
0x5a, /* */
FC_CONSTANT_IID /* */
/* 352 */ NdrFcLong( 0x20400 ), /* 132096 */ /* */
/* 356 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 358 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 360 */ NdrFcShort( 0xc0 ), /* 192 */ /* */
0x0, /* */
0 */ /* */
/* 362 */ /* 0 */ /* */
0x0, /* */
0 */ /* */
/* 364 */ /* 0 */ /* */
0x0, /* */
0 */ /* */
/* 366 */ /* 0 */ /* */
0x46, /* */
70 */ /* */
/* 368 */ /* */
0x12, 0x10, /* */
FC_UP [pointer_deref] /* */
/* 370 */ NdrFcShort( 0x2 ), /* Offset= 2 (372) */ /* */
/* 372 */ /* */
0x12, 0x0, /* */
FC_UP /* */
/* 374 */ NdrFcShort( 0x1fc ), /* Offset= 508 (882) */ /* */
/* 376 */ /* */
0x2a, /* */
FC_ENCAPSULATED_UNION /* */
73 */ /* */
/* 378 */ NdrFcShort( 0x18 ), /* 24 */ /* */
/* 380 */ NdrFcShort( 0xa ), /* 10 */ /* */
/* 382 */ NdrFcLong( 0x8 ), /* 8 */ /* */
/* 386 */ NdrFcShort( 0x58 ), /* Offset= 88 (474) */ /* */
/* 388 */ NdrFcLong( 0xd ), /* 13 */ /* */
/* 392 */ NdrFcShort( 0x78 ), /* Offset= 120 (512) */ /* */
/* 394 */ NdrFcLong( 0x9 ), /* 9 */ /* */
/* 398 */ NdrFcShort( 0x94 ), /* Offset= 148 (546) */ /* */
/* 400 */ NdrFcLong( 0xc ), /* 12 */ /* */
/* 404 */ NdrFcShort( 0xbc ), /* Offset= 188 (592) */ /* */
/* 406 */ NdrFcLong( 0x24 ), /* 36 */ /* */
/* 410 */ NdrFcShort( 0x114 ), /* Offset= 276 (686) */ /* */
/* 412 */ NdrFcLong( 0x800d ), /* 32781 */ /* */
/* 416 */ NdrFcShort( 0x130 ), /* Offset= 304 (720) */ /* */
/* 418 */ NdrFcLong( 0x10 ), /* 16 */ /* */
/* 422 */ NdrFcShort( 0x148 ), /* Offset= 328 (750) */ /* */
/* 424 */ NdrFcLong( 0x2 ), /* 2 */ /* */
/* 428 */ NdrFcShort( 0x160 ), /* Offset= 352 (780) */ /* */
/* 430 */ NdrFcLong( 0x3 ), /* 3 */ /* */
/* 434 */ NdrFcShort( 0x178 ), /* Offset= 376 (810) */ /* */
/* 436 */ NdrFcLong( 0x14 ), /* 20 */ /* */
/* 440 */ NdrFcShort( 0x190 ), /* Offset= 400 (840) */ /* */
/* 442 */ NdrFcShort( 0xffff ), /* Offset= -1 (441) */ /* */
/* 444 */ /* */
0x1b, /* */
FC_CARRAY /* */
0x3, /* */
3 */ /* */
/* 446 */ NdrFcShort( 0x4 ), /* 4 */ /* */
/* 448 */ 0x19, /* Corr desc: field pointer, FC ULONG */ /* */
0x0, /* */
/* */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 452 */ /* */
0x4b, /* */
FC_PP /* */
0x5c, /* */
FC_PAD /* */
/* 454 */ /* */
0x48, /* */
FC_VARIABLE_REPEAT /* */
0x49, /* */
FC_FIXED_OFFSET /* */
/* 456 */ NdrFcShort( 0x4 ), /* 4 */ /* */
/* 458 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 460 */ NdrFcShort( 0x1 ), /* 1 */ /* */
/* 462 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 466 */ 0x12, 0x0, /* FC_UP */ /* */
/* 468 */ NdrFcShort( 0xff6e ), /* Offset= -146 (322) */ /* */
/* 470 */ /* */
0x5b, /* */
FC_END /* */
0x8, /* */
FC_LONG /* */
/* 472 */ 0x5c, /* FC_PAD */ /* */
0x5b, /* */
FC_END /* */
/* 474 */ /* */
0x16, /* */
FC_PSTRUCT /* */
0x3, /* */
3 */ /* */
/* 476 */ NdrFcShort( 0x8 ), /* 8 */ /* */
/* 478 */ /* */
0x4b, /* */
FC_PP /* */
0x5c, /* */
FC_PAD /* */
/* 480 */ /* */
0x46, /* */
FC_NO_REPEAT /* */
0x5c, /* */
FC_PAD /* */
/* 482 */ NdrFcShort( 0x4 ), /* 4 */ /* */
/* 484 */ NdrFcShort( 0x4 ), /* 4 */ /* */
/* 486 */ 0x11, 0x0, /* FC_RP */ /* */
/* 488 */ NdrFcShort( 0xffd4 ), /* Offset= -44 (444) */ /* */
/* 490 */ /* */
0x5b, /* */
FC_END /* */
0x8, /* */
FC_LONG /* */
/* 492 */ 0x8, /* FC_LONG */ /* */
0x5b, /* */
FC_END /* */
/* 494 */ /* */
0x21, /* */
FC_BOGUS_ARRAY /* */
0x3, /* */
3 */ /* */
/* 496 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 498 */ 0x19, /* Corr desc: field pointer, FC ULONG */ /* */
0x0, /* */
/* */
/* 500 */ NdrFcShort( 0x0 ), /* 0 */ /* */
/* 502 */ NdrFcLong( 0xffffffff ), /* -1 */ /* */
/* 506 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* */
/* */
0x0, /* */
/* */
/* 508 */ NdrFcShort( 0xff50 ), /* Offset= -176 (332) */ /* */
/* 510 */ 0x5c, /* FC_PAD */ /* */
0x5b, /* */
FC_END /* */
/* 512 */ /* */
0x1a, /* */
FC_BOGUS_STRUCT /* */
0x3, /* */
3 */ /* */
/* 514 */ NdrFcShort( 0x8 ), /* 8 */ /* */
/* 516 */ NdrFcShort( 0x0 ), /* 0 */ /* */

```

```

/* 518 */ NdrFcShort( 0x6 ), /* Offset= 6 (524) */
/* 520 */ 0x8, /* FC_LONG */
0x36, /* */
FC_POINTER */
/* 522 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 524 */
0x11, 0x0, /* */
FC_RP */
/* 526 */ NdrFcShort( 0xffe0 ), /* Offset= -32 (494) */
/* 528 */
0x21, /* */
FC_BOGUS_ARRAY */
0x3, /* */
3 */
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/* 534 */ NdrFcShort( 0x0 ), /* 0 */
/* 536 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
*/
0x0, /* */
0 */
/* 542 */ NdrFcShort( 0xff40 ), /* Offset= -192 (350) */
/* 544 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 546 */
0x1a, /* */
FC_BOGUS_STRUCT */
0x3, /* */
3 */
/* 548 */ NdrFcShort( 0x8 ), /* 8 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
0x36, /* */
FC_POINTER */
/* 556 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 558 */
0x11, 0x0, /* */
FC_RP */
/* 560 */ NdrFcShort( 0xffe0 ), /* Offset= -32 (528) */
/* 562 */
0x1b, /* */
FC_CARRAY */
0x3, /* */
3 */
/* 564 */ NdrFcShort( 0x4 ), /* 4 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
/*
/* 570 */ NdrFcShort( 0x4 ), /* 4 */
/* 572 */ 0x5c, /* FC_PAD */
0x48, /* */
FC_VARIABLE_REPEAT */
0x49, /* */
FC_FIXED_OFFSET */
/* 574 */ NdrFcShort( 0x4 ), /* 4 */
/* 576 */ NdrFcShort( 0x0 ), /* 0 */
/* 578 */ NdrFcShort( 0x1 ), /* 1 */
/* 580 */ NdrFcShort( 0x0 ), /* 0 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ 0x12, 0x0, /* FC_UP */
/* 586 */ NdrFcShort( 0x184 ), /* Offset= 388 (974) */
/* 588 */
0x5b, /* */
FC_END */
0x8, /* */
FC_LONG */
/* 590 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 592 */
0x1a, /* */
FC_BOGUS_STRUCT */
0x3, /* */
3 */
/* 594 */ NdrFcShort( 0x8 ), /* 8 */
/* 596 */ NdrFcShort( 0x0 ), /* 0 */
/* 598 */ NdrFcShort( 0x6 ), /* Offset= 6 (604) */
/* 600 */ 0x8, /* FC_LONG */
0x36, /* */
FC_POINTER */
/* 602 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 604 */
0x11, 0x0, /* */
FC_RP */
/* 606 */ NdrFcShort( 0xffd4 ), /* Offset= -44 (562) */
/* 608 */
0x2f, /* */
FC_IP */
0x5a, /* */
FC_CONSTANT_IID */
/* 610 */ NdrFcLong( 0x2f ), /* 47 */
/* 614 */ NdrFcShort( 0x0 ), /* 0 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ 0xc0, /* 192 */
0x0, /* */
0 */
/* 620 */ 0x0, /* 0 */
0x0, /* */
0 */
/* 622 */ 0x0, /* 0 */
0x0, /* */
0 */
/*
/* 624 */ 0x0, /* 0 */
/* 626 */
0x1b, /* */
FC_CARRAY */
0x0, /* */
0 */
/* 628 */ NdrFcShort( 0x1 ), /* 1 */
/* 630 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/* 632 */ NdrFcShort( 0x4 ), /* 4 */
/* 634 */ 0x1, /* FC_BYT */
0x5b, /* */
FC_END */
/* 636 */
0x1a, /* */
FC_BOGUS_STRUCT */
0x3, /* */
3 */
/* 638 */ NdrFcShort( 0x10 ), /* 16 */
/* 640 */ NdrFcShort( 0x0 ), /* 0 */
/* 642 */ NdrFcShort( 0xa ), /* Offset= 10 (652) */
/* 644 */ 0x8, /* FC_LONG */
0x8, /* */
FC_LONG */
/* 646 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
*/
0x0, /* */
0 */
/* 648 */ NdrFcShort( 0xffd8 ), /* Offset= -40 (608) */
/* 650 */ 0x36, /* FC_POINTER */
0x5b, /* */
FC_END */
/* 652 */
0x12, 0x0, /* */
FC_UP */
/* 654 */ NdrFcShort( 0xffe4 ), /* Offset= -28 (626) */
/* 656 */
0x1b, /* */
FC_CARRAY */
0x3, /* */
3 */
/* 658 */ NdrFcShort( 0x4 ), /* 4 */
/* 660 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/* 662 */ NdrFcShort( 0x0 ), /* 0 */
/* 664 */
0x4b, /* */
FC_PP */
0x5c, /* */
FC_PAD */
/* 666 */
0x48, /* */
FC_VARIABLE_REPEAT */
0x49, /* */
FC_FIXED_OFFSET */

```

```

/* 668 */ NdrFcShort( 0x4 ), /* 4 */
/* 670 */ NdrFcShort( 0x0 ), /* 0 */
/* 672 */ NdrFcShort( 0x1 ), /* 1 */
/* 674 */ NdrFcShort( 0x0 ), /* 0 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ 0x12, 0x0, /* FC_UP */
/* 680 */ NdrFcShort( 0xffffd4 ), /* Offset= -44 (636) */
/* 682 */ 0x5b, /* */
FC_END /* 0x8, */
FC_LONG /* 0x8c,
/* 684 */ /* FC_PAD */
FC_END /* 0x5b, */
/* 686 */ 0x1a, /* */
FC_BOGUS_STRUCT /* 0x3, */
3 /*
/* 722 */ NdrFcShort( 0x18 ), /* 24 */
/* 724 */ NdrFcShort( 0x0 ), /* 0 */
/* 726 */ NdrFcShort( 0xa ), /* Offset= 10 (736) */
/* 728 */ 0x8, /* FC_LONG */
0x36, /* */
FC_POINTER /* */
/* 730 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
/*
0 /*
/* 732 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (708) */
/* 734 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END /* */
/* 736 */ /*
0x11, 0x0, /* */
FC_RP /* */
/* 738 */ NdrFcShort( 0xff0c ), /* Offset= -244 (494) */
/* 740 */ /*
0x1b, /* */
FC_CARRAY /* */
0x0, /* */
0 /*
/* 742 */ NdrFcShort( 0x1 ), /* 1 */
/* 744 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
*/
/* 746 */ NdrFcShort( 0x0 ), /* 0 */
/* 748 */ 0x1, /* FC_BYTE */
0x5b, /* */
FC_END /* */
/* 750 */ /*
0x16, /* */
FC_PSTRUCT /* */
0x3, /* */
3 /*
/* 752 */ NdrFcShort( 0x8 ), /* 8 */
/* 754 */ /*
0x4b, /* */
FC_PP /* */
0x5c, /* */
FC_PAD /* */
/* 756 */ /*
0x46, /* */
FC_NO_REPEAT /* */
0x5c, /* */
FC_PAD /* */
/* 758 */ NdrFcShort( 0x4 ), /* 4 */
/* 760 */ NdrFcShort( 0x4 ), /* 4 */
/* 762 */ 0x12, 0x0, /* FC_UP */
/* 764 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (740) */
/* 766 */ /*
0x5b, /* */
FC_END /* */
FC_END /* 0x8, */
FC_LONG /* 0x8c,
/* 768 */ 0x8, /* FC_LONG */
0x5b, /* */
FC_END /* */
/* 770 */ /*
0x1b, /* */
FC_CARRAY /* */
0x1, /* */
1 /*
/* 772 */ NdrFcShort( 0x2 ), /* 2 */
/* 774 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
*/
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ 0x6, /* FC_SHORT */
0x5b, /* */
FC_END /* */
/* 780 */ /*
0x16, /* */
FC_PSTRUCT /* */
0x3, /* */
3 /*
/* 782 */ NdrFcShort( 0x8 ), /* 8 */
/* 784 */ /*
0x4b, /* */
FC_PP /* */
0x5c, /* */
FC_PAD /* */
/* 786 */ /*
0x46, /* */
FC_NO_REPEAT /* */
0x5c, /* */
FC_PAD /* */
/* 788 */ NdrFcShort( 0x4 ), /* 4 */
/* 790 */ NdrFcShort( 0x4 ), /* 4 */
/* 792 */ 0x12, 0x0, /* FC_UP */
/* 794 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (770) */
/* 796 */ /*
0x5b, /* */
FC_END /* */
0x8, /* */
FC_LONG /* 0x8c,
/* 798 */ 0x8, /* FC_LONG */
0x5b, /* */
FC_END /* */
/* 800 */ /*
0x1b, /* */
FC_CARRAY /* */
0x3, /* */
3 /*
/* 802 */ NdrFcShort( 0x4 ), /* 4 */
/* 804 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
*/
/* 806 */ NdrFcShort( 0x0 ), /* 0 */
/* 808 */ 0x8, /* FC_LONG */
0x5b, /* */
FC_END /* */

```

```

/* 810 */
0x16,      /*
FC_PSTRUCT */
0x3,       /*
3 */
/* 812 */ NdrFcShort( 0x8 ), /* 8 */
/* 814 */
0x4b,      /*
FC_PP */
0x5c,      /*
FC_PAD */
/* 816 */
0x46,      /*
FC_NO_REPEAT */
0x5c,      /*
FC_PAD */
/* 818 */ NdrFcShort( 0x4 ), /* 4 */
/* 820 */ NdrFcShort( 0x4 ), /* 4 */
/* 822 */ 0x12, 0x0, /* FC_UP */
/* 824 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (800) */
/* 826 */
0x5b,      /*
FC_END */
0x8,       /*
FC_LONG */
/* 828 */ 0x8, /* FC_LONG */
0x5b,      /*
FC_END */
/* 830 */
0x1b,      /*
FC_CARRAY */
0x7,       /*
7 */
/* 832 */ NdrFcShort( 0x8 ), /* 8 */
/* 834 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0,       /*
*/
/* 836 */ NdrFcShort( 0x0 ), /* 0 */
/* 838 */ 0xb, /* FC_HYPER */
0x5b,      /*
FC_END */
/* 840 */
0x16,      /*
FC_PSTRUCT */
0x3,       /*
3 */
/* 842 */ NdrFcShort( 0x8 ), /* 8 */
/* 844 */
0x4b,      /*
FC_PP */
0x5c,      /*
FC_PAD */
/* 846 */
0x46,      /*
FC_NO_REPEAT */
0x5c,      /*
FC_PAD */
/* 848 */ NdrFcShort( 0x4 ), /* 4 */
/* 850 */ NdrFcShort( 0x4 ), /* 4 */
/* 852 */ 0x12, 0x0, /* FC_UP */
/* 854 */ NdrFcShort( 0xffe8 ), /* 24 (830) */
/* 856 */
0x5b,      /*
FC_END */
0x8,       /*
FC_LONG */
/* 858 */ 0x8, /* FC_LONG */
0x5b,      /*
FC_END */
/* 860 */
0x15,      /*
FC_STRUCT */
0x3,       /*
3 */
/* 862 */ NdrFcShort( 0x8 ), /* 8 */
/* 864 */ 0x8, /* FC_LONG */
0x8,       /*
FC_LONG */
/* 866 */ 0x5c, /* FC_PAD */
0x5b,      /*
FC_END */
/* 868 */
0x1b,      /*
FC_CARRAY */
0x3,       /*
3 */
/* 870 */ NdrFcShort( 0x8 ), /* 8 */
/* 872 */ 0x7, /* Corr desc: FC USHORT */
*/
0x0,       /*
*/
/* 874 */ NdrFcShort( 0xffd8 ), /* -40 */
/* 876 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
*/
0x0,       /*
0 */
/* 878 */ NdrFcShort( 0xffee ), /* Offset= -18 (860) */
/* 880 */ 0x5c, /* FC_PAD */
0x5b,      /*
FC_END */
/* 882 */
0x1a,      /*
FC_BOGUS_STRUCT */
0x3,       /*
3 */
/* 884 */ NdrFcShort( 0x28 ), /* 40 */
/* 886 */ NdrFcShort( 0xffee ), /* Offset= -18 (868) */
/* 888 */ NdrFcShort( 0x0 ), /* Offset= 0 (888) */
/* 890 */ 0x6, /* FC_SHORT */
0x6,       /*
FC_SHORT */
/* 892 */ 0x8, /* FC_LONG */
0x8,       /*
FC_LONG */
/* 894 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
*/
0x0,       /*
0 */
/* 896 */ NdrFcShort( 0xfd8 ), /* 520 (376) */
/* 898 */
0x5c,      /*
FC_PAD */
0x5b,      /*
FC_END */
/* 900 */
0x12, 0x0, /*
FC_UP */
/* 902 */ NdrFcShort( 0xef6 ), /* 266 (636) */
/* 904 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 906 */ 0x1, /* FC_BYTE */
0x5c,      /*
FC_PAD */
/* 908 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 910 */ 0x6, /* FC_SHORT */
0x5c,      /*
FC_PAD */
/* 912 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 914 */ 0x8, /* FC_LONG */
0x5c,      /*
FC_PAD */
/* 916 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 918 */ 0xb, /* FC_HYPER */
0x5c,      /*
FC_PAD */
/* 920 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 922 */ 0xa, /* FC_FLOAT */
0x5c,      /*
FC_PAD */
/* 924 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 926 */ 0xc, /* FC_DOUBLE */
0x5c,      /*
FC_PAD */
/* 928 */
0x12, 0x0, /*
FC_UP */
/* 930 */ NdrFcShort( 0xfd8c ), /* 628 (302) */
/* 932 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 934 */ NdrFcShort( 0xfd8e ), /* 626 (308) */
/* 936 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 938 */ NdrFcShort( 0xfd8a2 ), /* 606 (332) */
/* 940 */

```

```

        0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 942 */ NdrFcShort( 0xffffb0 ),           /* Offset= -592 (350) */
/* 944 */
        0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 946 */ NdrFcShort( 0xffffbe ),           /* Offset= -578 (368) */
/* 948 */
        0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 950 */ NdrFcShort( 0x2 ),    /* Offset= 2 (952) */
/* 952 */
        0x12, 0x0,       /*
FC_UP */
/* 954 */ NdrFcShort( 0x14 ),   /* Offset= 20 (974) */
/* 956 */
        0x15,           /*
FC_STRUCT */
        0x7,            /*
7 */
/* 958 */ NdrFcShort( 0x10 ),   /* 16 */
/* 960 */ 0x6,          /* FC_SHORT */
        0x1,            /*
FC_BYTE */
/* 962 */ 0x1,          /* FC_BYTE */
        0x8,            /*
FC_LONG */
/* 964 */ 0xb,          /* FC_HYPER */
        0x5b,           /*
FC_END */
/* 966 */
        0x12, 0x0,       /*
FC_UP */
/* 968 */ NdrFcShort( 0xfffff4 ),           /* Offset= -12 (956) */
/* 970 */
        0x12, 0x8,       /*
FC_UP [simple_pointer] */
/* 972 */ 0x2,          /* FC_CHAR */
        0x5c,           /*
FC_PAD */
/* 974 */
        0x1a,           /*
FC_ROGUS_STRUCT */
        0x7,            /*
7 */
/* 976 */ NdrFcShort( 0x20 ),   /* 32 */
/* 978 */ NdrFcShort( 0x0 ),    /* 0 */
/* 980 */ NdrFcShort( 0x0 ),   /* Offset= 0 (980) */
/* 982 */ 0x8,          /* FC_LONG */
        0x8,            /*
FC_LONG */
/* 984 */ 0x6,          /* FC_SHORT */
        0x6,            /*
FC_SHORT */
/* 986 */ 0x6,          /* FC_SHORT */
        0x6,            /*
FC_SHORT */
/* 988 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */
*/

```

```

        0x0,             /*
0 */
/* 990 */ NdrFcShort( 0xfc28 ),           /* Offset= -984 (6) */
/* 992 */ 0x5c,          /* FC_PAD */
        0x5b,           /*
FC_END */
/* 994 */ 0xb4,          /* FC_USER_MARSHAL */
        0x83,           /*
131 */
/* 996 */ NdrFcShort( 0x0 ),   /* 0 */
/* 998 */ NdrFcShort( 0x10 ),   /* 16 */
/* 1000 */ NdrFcShort( 0x0 ),   /* 0 */
/* 1002 */ NdrFcShort( 0xfc18 ),           /* Offset= -1000 (2) */
/* 1004 */
        0x11, 0x4,       /*
FC_RP [allocated_on_stack] */
/* 1006 */ NdrFcShort( 0x6 ),   /* Offset= 6 (1012) */
/* 1008 */
        0x13, 0x0,       /*
FC_OP */
/* 1010 */ NdrFcShort( 0xffdc ),           /* Offset= -36 (974) */
/* 1012 */
        0xb4,           /*
FC_USER_MARSHAL */
        0x83,           /*
131 */
/* 1014 */ NdrFcShort( 0x0 ),   /* 0 */
/* 1016 */ NdrFcShort( 0x10 ),   /* 16 */
/* 1018 */ NdrFcShort( 0x0 ),   /* 0 */
/* 1020 */ NdrFcShort( 0xffff4 ),           /* Offset= -12 (1008) */
        0x0
    }
}

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize,
        VARIANT_UserMarshal,
        VARIANT_UserUnmarshal,
        VARIANT_UserFree
    }
};

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */
/* Object interface: IUnknown, ver. 0.0,

```

```

GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x4F,0xBF,0xE0,0x8B}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEFE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    {
        &Object_StubDesc,
        __MIDL_ProcFormatString.Format,
        &ITPCC_FormatStringOffsetTable[-3],
        0,
        0,
        0
    };

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    {
        &Object_StubDesc,
        0,
        __MIDL_ProcFormatString.Format,
        &ITPCC_FormatStringOffsetTable[-3],
        0,
        0,
        0,
        0
    };

CINTERFACE_PROXYVtbl(_ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
});

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,

```

```

&ITPCC_ServerInfo,
9,
0, /* pure interpreted */
CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
0,
NdrOleAllocate,
NdrOleFree,
0,
0,
0,
0,
0,
0,
0,
0,
_MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x20000, /* Ndr library version */
0,
0x6000169, /* MIDL Version 6.0.361 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* cs routines */
0, /* proxy/server info */
0 /* Reserved5 */
};

const CIInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    (CIInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CIInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    (CIInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID(_tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(! _tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;

```

```

        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#if _MSC_VER >= 1200
#pragma warning(push)
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64) */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env:Win64 (32b run, appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany),
    __declspec(novtable)
        DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif

```

```

#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity */
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDO_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1003
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0xA885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}}, {2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

```

```

#if !defined(__RPC_WIN64__)
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    {
        0,
    }

    /* Procedure NewOrder */
    0x33,           /*
FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 2 */ NdrFcLong( 0x0 ), /* 0 */
/* 6 */ NdrFcShort( 0x3 ), /* 3 */
/* 8 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 44 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
/* 52 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47,           /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /*
3 */
/* 60 */ 0xa,           /* 10 */
        0x7,           /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */
/* 70 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 72 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 74 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */
/* 76 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 78 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 80 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */
/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 84 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 86 */ 0x8,           /* FC_LONG */
        0x0,           /*
0 */

/* Procedure Delivery */
/* 88 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
/* 96 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */

```

```

/* Procedure Payment */
/* 44 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
/* 52 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47,           /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /*
3 */
/* 60 */ 0xa,           /* 10 */
        0x7,           /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */
/* 70 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 72 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 74 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */
/* 76 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 78 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 80 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */
/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 84 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 86 */ 0x8,           /* FC_LONG */
        0x0,           /*
0 */

/* Procedure Delivery */
/* 88 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
/* 96 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */

```

```

/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47,           /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /*
3 */
/* 104 */ 0xa,           /* 10 */
        0x7,           /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */
/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 116 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 118 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */
/* 120 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 122 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 124 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */
/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 128 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 130 */ 0x8,           /* FC_LONG */
        0x0,           /*
0 */

/* Procedure StockLevel */
/* 132 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
/* 140 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47,           /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /*
3 */
/* 148 */ 0xa,           /* 10 */
        0x7,           /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */

```

```

/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 160 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 162 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 166 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 168 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 172 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 174 */ 0x8,           /* FC_LONG */
          0x0,           /* */
0 */

    /* Procedure OrderStatus */

/* 176 */ 0x33,           /* FC_AUTO_HANDLE */
          0x6c,           /* */
Old Flags: object, Oi2
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
/* 184 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47,           /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
          0x3,           /* */
3 */
/* 192 */ 0xa,            /* 10 */
          0x7,           /* */
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 204 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 206 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 210 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 212 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 216 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 218 */ 0x8,           /* FC_LONG */
          0x0,           /* */
0 */

    /* Procedure CallSetComplete */

/* 220 */ 0x33,           /* FC_AUTO_HANDLE */
          0x6c,           /* */
Old Flags: object, Oi2
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44,           /* Oi2 Flags: has
return, has ext, */
          0x1,           /* */
1 */
/* 236 */ 0xa,            /* 10 */
          0x1,           /* */
Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

    /* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 250 */ 0x8,            /* FC_LONG */
          0x0,           /* */
0 */

    /* */
          0x0
};

}

```

```

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /* */
        /* 2 */ 0x12, 0x0, /* */
        FC_UP /* */
        /* 4 */ NdrFcShort( 0x3b6 ), /* Offset=
950(954) */
        /* 6 */ 0x2b, /* */
        FC_NON_ENCAPSULATED_UNION /* */
        0x9, /* */
        FC ULONG /* */
        /* 8 */ 0x7, /* Corr desc: FC USHORT
*/
        /* */
        0x0, /* */
        /* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
        /* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
        /* */
        /* 14 */ NdrFcShort( 0x2 ), /* Offset= 2 (16) */
        /* 16 */ NdrFcShort( 0x10 ), /* 16 */
        /* 18 */ NdrFcShort( 0x2f ), /* 47 */
        /* 20 */ NdrFcLong( 0x14 ), /* 20 */
        /* 24 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
        /* 26 */ NdrFcLong( 0x3 ), /* 3 */
        /* 30 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
        /* 32 */ NdrFcLong( 0x11 ), /* 17 */
        /* 36 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYT */
        /* 38 */ NdrFcLong( 0x2 ), /* 2 */
        /* 42 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
        /* 44 */ NdrFcLong( 0x4 ), /* 4 */
        /* 48 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
        /* 50 */ NdrFcLong( 0x5 ), /* 5 */
        /* 54 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
        /* 56 */ NdrFcLong( 0xb ), /* 11 */
        /* 60 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
        /* 62 */ NdrFcLong( 0xa ), /* 10 */
        /* 66 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
        /* 68 */ NdrFcLong( 0x6 ), /* 6 */
        /* 72 */ NdrFcShort( 0xe8 ), /* Offset= 232 (304) */
        /* 74 */ NdrFcLong( 0x7 ), /* 7 */
        /* 78 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
        /* 80 */ NdrFcLong( 0x8 ), /* 8 */
        /* 84 */ NdrFcShort( 0xe2 ), /* Offset= 226 (310) */
        /* 86 */ NdrFcLong( 0xd ), /* 13 */
        /* 90 */ NdrFcShort( 0xf6 ), /* Offset= 246 (336) */
        /* 92 */ NdrFcLong( 0x9 ), /* 9 */
        /* 96 */ NdrFcShort( 0x102 ), /* Offset=
258 (354) */

```

```

/* 98 */ NdrFcLong( 0x2000 ),           /* 8192 */
/* 102 */ NdrFcShort( 0x10e ),           /* Offset= */
270 (372) */
/* 104 */ NdrFcLong( 0x24 ),             /* 36 */
/* 108 */ NdrFcShort( 0x304 ),           /* Offset= */
772 (880) */
/* 110 */ NdrFcLong( 0x4024 ),           /* 16420 */
/* 114 */ NdrFcShort( 0x2fe ),           /* Offset= */
766 (880) */
/* 116 */ NdrFcLong( 0x4011 ),           /* 16401 */
/* 120 */ NdrFcShort( 0x2fc ),           /* Offset= */
764 (884) */
/* 122 */ NdrFcLong( 0x4002 ),           /* 16386 */
/* 126 */ NdrFcShort( 0x2fa ),           /* Offset= */
762 (888) */
/* 128 */ NdrFcLong( 0x4003 ),           /* 16387 */
/* 132 */ NdrFcShort( 0x2f8 ),           /* Offset= */
760 (892) */
/* 134 */ NdrFcLong( 0x4014 ),           /* 16404 */
/* 138 */ NdrFcShort( 0x2f6 ),           /* Offset= */
758 (896) */
/* 140 */ NdrFcLong( 0x4004 ),           /* 16388 */
/* 144 */ NdrFcShort( 0x2f4 ),           /* Offset= */
756 (900) */
/* 146 */ NdrFcLong( 0x4005 ),           /* 16389 */
/* 150 */ NdrFcShort( 0x2f2 ),           /* Offset= */
754 (904) */
/* 152 */ NdrFcLong( 0x400b ),           /* 16395 */
/* 156 */ NdrFcShort( 0x2dc ),           /* Offset= */
732 (888) */
/* 158 */ NdrFcLong( 0x400a ),           /* 16394 */
/* 162 */ NdrFcShort( 0x2da ),           /* Offset= */
730 (892) */
/* 164 */ NdrFcLong( 0x4006 ),           /* 16390 */
/* 168 */ NdrFcShort( 0x2e4 ),           /* Offset= */
740 (908) */
/* 170 */ NdrFcLong( 0x4007 ),           /* 16391 */
/* 174 */ NdrFcShort( 0x2da ),           /* Offset= */
730 (904) */
/* 176 */ NdrFcLong( 0x4008 ),           /* 16392 */
/* 180 */ NdrFcShort( 0x2dc ),           /* Offset= */
732 (912) */
/* 182 */ NdrFcLong( 0x400d ),           /* 16397 */
/* 186 */ NdrFcShort( 0x2da ),           /* Offset= */
730 (916) */
/* 188 */ NdrFcLong( 0x4009 ),           /* 16393 */
/* 192 */ NdrFcShort( 0x2d8 ),           /* Offset= */
728 (920) */
/* 194 */ NdrFcLong( 0x6000 ),           /* 24576 */
/* 198 */ NdrFcShort( 0x2d6 ),           /* Offset= */
726 (924) */
/* 200 */ NdrFcLong( 0x400c ),           /* 16396 */
/* 204 */ NdrFcShort( 0x2d4 ),           /* Offset= */
724 (928) */
/* 206 */ NdrFcLong( 0x10 ),             /* 16 */
/* 210 */ NdrFcShort( 0x8002 ),           /* Simple arm
type: FC_CHAR */
/* 212 */ NdrFcLong( 0x12 ),             /* 18 */
/* 216 */ NdrFcShort( 0x8006 ),           /* Simple arm
type: FC_SHORT */
/* 218 */ NdrFcLong( 0x13 ),             /* 19 */
/* 222 */ NdrFcShort( 0x8008 ),           /* Simple arm
type: FC_LONG */

```

```

/* 224 */ NdrFcLong( 0x15 ),             /* 21 */
/* 228 */ NdrFcShort( 0x800b ),           /* Simple arm
type: FC_HYPER */
/* 230 */ NdrFcLong( 0x16 ),             /* 22 */
/* 234 */ NdrFcShort( 0x8008 ),           /* Simple arm
type: FC_LONG */
/* 236 */ NdrFcLong( 0x17 ),             /* 23 */
/* 240 */ NdrFcShort( 0x8008 ),           /* Simple arm
type: FC_LONG */
/* 242 */ NdrFcLong( 0xe ),              /* 14 */
/* 246 */ NdrFcShort( 0x2b2 ),           /* Offset= */
690 (936) */
/* 248 */ NdrFcLong( 0x400e ),           /* 16398 */
/* 252 */ NdrFcShort( 0x2b6 ),           /* Offset= */
694 (946) */
/* 254 */ NdrFcLong( 0x4010 ),           /* 16400 */
/* 258 */ NdrFcShort( 0x2b4 ),           /* Offset= */
692 (950) */
/* 260 */ NdrFcLong( 0x4012 ),           /* 16402 */
/* 264 */ NdrFcShort( 0x270 ),           /* Offset= */
624 (888) */
/* 266 */ NdrFcLong( 0x4013 ),           /* 16403 */
/* 270 */ NdrFcShort( 0x26e ),           /* Offset= */
622 (892) */
/* 272 */ NdrFcLong( 0x4015 ),           /* 16405 */
/* 276 */ NdrFcShort( 0x26c ),           /* Offset= */
620 (896) */
/* 278 */ NdrFcLong( 0x4016 ),           /* 16406 */
/* 282 */ NdrFcShort( 0x262 ),           /* Offset= */
610 (892) */
/* 284 */ NdrFcLong( 0x4017 ),           /* 16407 */
/* 288 */ NdrFcShort( 0x25c ),           /* Offset= */
604 (892) */
/* 290 */ NdrFcLong( 0x0 ),              /* 0 */
/* 294 */ NdrFcShort( 0x0 ),             /* Offset= 0 (294) */
/* 296 */ NdrFcLong( 0x1 ),              /* 1 */
/* 300 */ NdrFcShort( 0x0 ),             /* Offset= 0 (300) */
/* 302 */ NdrFcShort( 0xffff ),           /* Offset= -1
(301) */
/* 304 */                                         0x15,          /* */
FC_STRUCT */                               0x7,            /* */
7 */
/* 306 */ NdrFcShort( 0x8 ),             /* 8 */
/* 308 */ 0xb,                            /* FC_HYPER */
0x5b,          /* */
FC_END */                                0x12, 0x0,      /* */
/* 310 */                                         0x12, 0x0,      /* */
FC_UP */                                 0x1b,          /* */
/* 312 */ NdrFcShort( 0xe ),             /* Offset= 14 (326) */
/* 314 */                                         0x1b,          /* */
FC_CARRAY */                             0x1,           /* */
1 */
/* 316 */ NdrFcShort( 0x2 ),              /* 2 */
/* 318 */ 0x9,                            /* Corr desc: FC ULONG
*/
0x0,           /* */
/* 320 */ NdrFcShort( 0xffff ),           /* -4 */

```

```

/* 322 */ NdrFcShort( 0x1 ),             /* Corr flags: early,
*/
/* 324 */ 0x6,                            /* FC_SHORT */
0x5b,          /* */
FC_END */                                0x17,          /* */
/* 326 */                                         0x3,           /* */
FC_CSTRUCT */                           3 */
/* 328 */ NdrFcShort( 0x8 ),              /* 8 */
/* 330 */ NdrFcShort( 0xffff0 ),           /* Offset= -
16 (314) */
/* 332 */ 0x8,                            /* FC_LONG */
0x8,           /* */
FC_LONG */                                0x5c,          /* */
/* 334 */ 0x5c,                            /* FC_PAD */
0x5b,          /* */
FC_END */                                0x2f,          /* */
/* 336 */                                         0x5a,          /* */
FC_IP */                                 0 */
FC_CONSTANT_IID */                      0 */
/* 338 */ NdrFcLong( 0x0 ),              /* 0 */
/* 342 */ NdrFcShort( 0x0 ),              /* 0 */
/* 344 */ NdrFcShort( 0x0 ),              /* 0 */
/* 346 */ 0xc0,                            /* 192 */
0x0,           /* */
0 */
/* 348 */ 0x0,                            /* 0 */
0x0,           /* */
0 */
/* 350 */ 0x0,                            /* 0 */
0x0,           /* */
0 */
/* 352 */ 0x0,                            /* 0 */
0x46,          /* */
70 */
/* 354 */                                         0x2f,          /* */
FC_IP */                                0x5a,          /* */
FC_CONSTANT_IID */                      0 */
/* 356 */ NdrFcLong( 0x20400 ),           /* 132096 */
/* 360 */ NdrFcShort( 0x0 ),              /* 0 */
/* 362 */ NdrFcShort( 0x0 ),              /* 0 */
/* 364 */ 0xc0,                            /* 192 */
0x0,           /* */
0 */
/* 366 */ 0x0,                            /* 0 */
0x0,           /* */
0 */
/* 368 */ 0x0,                            /* 0 */
0x0,           /* */
0 */
/* 370 */ 0x0,                            /* 0 */
0x46,          /* */
70 */
/* 372 */                                         0x12, 0x10,    /* */
FC_UP [pointer_deref] */                  0x12, 0x10,    /* */
/* 374 */ NdrFcShort( 0x2 ),              /* Offset= 2 (376) */

```

```

/* 376 */
          0x12, 0x0,      /*
FC_UP */
/* 378 */ NdrFcShort( 0x1e4 ),      /* Offset=
484 (862) */
/* 380 */
          0x2a,      /*
FC_ENCAPSULATED_UNION */
          0x89,      /*
137 */
/* 382 */ NdrFcShort( 0x20 ), /* 32 */
/* 384 */ NdrFcShort( 0xa ), /* 10 */
/* 386 */ NdrFcLong( 0x8 ), /* 8 */
/* 390 */ NdrFcShort( 0x50 ), /* Offset= 80 (470) */
/* 392 */ NdrFcLong( 0xd ), /* 13 */
/* 396 */ NdrFcShort( 0x70 ), /* Offset= 112 (508) */
/* 398 */ NdrFcLong( 0x9 ), /* 9 */
/* 402 */ NdrFcShort( 0x90 ), /* Offset= 144 (546) */
/* 404 */ NdrFcLong( 0xc ), /* 12 */
/* 408 */ NdrFcShort( 0xb ), /* Offset= 176 (584) */
/* 410 */ NdrFcLong( 0x24 ), /* 36 */
/* 414 */ NdrFcShort( 0x102 ), /* Offset=
258 (672) */
/* 416 */ NdrFcLong( 0x800d ), /* 32781 */
/* 420 */ NdrFcShort( 0x11e ), /* Offset=
286 (706) */
/* 422 */ NdrFcLong( 0x10 ), /* 16 */
/* 426 */ NdrFcShort( 0x138 ), /* Offset=
312 (738) */
/* 428 */ NdrFcLong( 0x2 ), /* 2 */
/* 432 */ NdrFcShort( 0x14e ), /* Offset=
334 (766) */
/* 434 */ NdrFcLong( 0x3 ), /* 3 */
/* 438 */ NdrFcShort( 0x164 ), /* Offset=
356 (794) */
/* 440 */ NdrFcLong( 0x14 ), /* 20 */
/* 444 */ NdrFcShort( 0x17a ), /* Offset=
378 (822) */
/* 446 */ NdrFcShort( 0xffff ), /* Offset= -1
(445) */
/* 448 */
          0x21,      /*
FC_BOGUS_ARRAY */
          0x3,      /*
3 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ 0x19,      /* Corr desc: field
pointer, FC ULONG */
          0x0,      /*
*/
/* 454 */ NdrFcShort( 0x0 ), /* 0 */
/* 456 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 458 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 462 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 464 */
          0x12, 0x0,      /*
FC_UP */
/* 466 */ NdrFcShort( 0xff74 ), /* Offset= -
140 (326) */
/* 468 */ 0x5c,      /* FC_PAD */
          0x5b,      /*
FC_END */
          0x21,      /*
          0x3,      /*
3 */
/* 470 */
          0x1a,      /*
FC_BOGUS_STRUCT */
          0x3,      /*
3 */
/* 472 */ NdrFcShort( 0x10 ), /* 16 */
/* 474 */ NdrFcShort( 0x0 ), /* 0 */
/* 476 */ NdrFcShort( 0x6 ), /* Offset= 6 (482) */
/* 478 */ 0x8,      /* FC_LONG */
          0x40,      /*
FC_STRUCTPAD4 */
/* 480 */ 0x36,      /* FC_POINTER */
          0x5b,      /*
FC_END */
/* 482 */
          0x11, 0x0,      /*
FC_RP */
/* 484 */ NdrFcShort( 0xffffdc ), /* Offset= -
36 (448) */
/* 486 */
          0x21,      /*
FC_BOGUS_ARRAY */
          0x3,      /*
3 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ 0x19,      /* Corr desc: field
pointer, FC ULONG */
          0x0,      /*
*/
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 496 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 500 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 502 */ 0x4c,      /* FC_EMBEDDED_COMPLEX */
          0x0,      /*
0 */
/* 504 */ NdrFcShort( 0xffff58 ), /* Offset= -
168 (336) */
/* 506 */ 0x5c,      /* FC_PAD */
          0x5b,      /*
FC_END */
/* 508 */
          0x1a,      /*
FC_BOGUS_STRUCT */
          0x3,      /*
3 */
/* 510 */ NdrFcShort( 0x10 ), /* 16 */
/* 512 */ NdrFcShort( 0x0 ), /* 0 */
/* 514 */ NdrFcShort( 0x6 ), /* Offset= 6 (520) */
/* 516 */ 0x8,      /* FC_LONG */
          0x40,      /*
FC_STRUCTPAD4 */
/* 518 */ 0x36,      /* FC_POINTER */
          0x5b,      /*
FC_END */
/* 520 */
          0x11, 0x0,      /*
FC_RP */
/* 522 */ NdrFcShort( 0xffffdc ), /* Offset= -
36 (486) */
/* 524 */
          0x21,      /*
FC_BOGUS_ARRAY */
          0x3,      /*
3 */
/* 548 */ NdrFcShort( 0x10 ), /* 16 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8,      /* FC_LONG */
          0x40,      /*
FC_STRUCTPAD4 */
/* 556 */ 0x36,      /* FC_POINTER */
          0x5b,      /*
FC_END */
/* 558 */
          0x11, 0x0,      /*
FC_RP */
/* 560 */ NdrFcShort( 0xffffdc ), /* Offset= -
36 (524) */
/* 562 */
          0x21,      /*
FC_BOGUS_ARRAY */
          0x3,      /*
3 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ 0x19,      /* Corr desc: field
pointer, FC ULONG */
          0x0,      /*
*/
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
/* 570 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 572 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 576 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 578 */
          0x12, 0x0,      /*
FC_UP */
/* 580 */ NdrFcShort( 0x176 ), /* Offset=
374 (954) */
/* 582 */ 0x5c,      /* FC_PAD */
          0x21,      /*
          0x3,      /*
3 */

```

<pre> FC_END */ /* 584 */ FC_BOGUS_STRUCT */ 0x1a, /* 3 */ /* 586 */ NdrFcShort(0x10), /* 16 */ /* 588 */ NdrFcShort(0x0), /* 0 */ /* 590 */ NdrFcShort(0x6), /* Offset= 6 (596) */ /* 592 */ 0x8, /* FC_LONG */ 0x40, /* FC_STRUCTPAD4 */ /* 594 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 596 */ 0x11, 0x0, /* FC_RP */ /* 598 */ NdrFcShort(0xffffdc), /* Offset= -36 (562) */ /* 600 */ 0x2f, /* FC_IP */ 0x5a, /* FC_CONSTANT_IID */ /* 602 */ NdrFcLong(0x2f), /* 47 */ /* 606 */ NdrFcShort(0x0), /* 0 */ /* 608 */ NdrFcShort(0x0), /* 0 */ /* 610 */ 0xc0, /* 192 */ 0x0, /* 0 */ /* 612 */ 0x0, /* 0 */ 0x0, /* 0 */ /* 614 */ 0x0, /* 0 */ 0x0, /* 0 */ /* 616 */ 0x0, /* 0 */ 0x46, /* 70 */ /* 618 */ 0x1b, /* FC_CARRAY */ 0x0, /* 0 */ /* 620 */ NdrFcShort(0x1), /* 1 */ /* 622 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 624 */ NdrFcShort(0x4), /* 4 */ /* 626 */ NdrFcShort(0x1), /* Corr flags: early */ /* */ /* 628 */ 0x1, /* FC_BYTE */ 0x5b, /* FC_END */ /* 630 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 632 */ NdrFcShort(0x18), /* 24 */ </pre>	<pre> 0x5b, /* */ /* 634 */ NdrFcShort(0x0), /* 0 */ /* 636 */ NdrFcShort(0xa), /* Offset= 10 (646) */ /* 638 */ 0x8, /* FC_LONG */ 0x8, /* */ FC_LONG */ /* 640 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* */ 0x0, /* */ /* 642 */ NdrFcShort(0xffffd6), /* Offset= -42 (600) */ /* 644 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 646 */ 0x12, 0x0, /* FC_UP */ /* 648 */ NdrFcShort(0xffffe2), /* Offset= -30 (618) */ /* 650 */ 0x21, /* FC_BOGUS_ARRAY */ 0x3, /* 3 */ /* 652 */ NdrFcShort(0x0), /* 0 */ /* 654 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 656 */ NdrFcShort(0x0), /* 0 */ /* 658 */ NdrFcShort(0x1), /* Corr flags: early */ /* */ /* 660 */ NdrFcLong(0xffffffff), /* -1 */ /* 664 */ NdrFcShort(0x0), /* Corr flags: */ /* 666 */ 0x12, 0x0, /* FC_UP */ /* 668 */ NdrFcShort(0xffffda), /* Offset= -38 (630) */ /* 670 */ 0x5c, /* FC_PAD */ 0x5b, /* FC_END */ /* 672 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 674 */ NdrFcShort(0x10), /* 16 */ /* 676 */ NdrFcShort(0x0), /* 0 */ /* 678 */ NdrFcShort(0x6), /* Offset= 6 (684) */ /* 680 */ 0x8, /* FC_LONG */ 0x40, /* FC_STRUCTPAD4 */ /* 682 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 684 */ 0x11, 0x0, /* FC_RP */ /* 686 */ NdrFcShort(0xffffdc), /* Offset= -36 (650) */ /* 688 */ </pre>	<pre> 0x1d, /* FC_SMFARRAY */ 0x0, /* 0 */ /* 690 */ NdrFcShort(0x8), /* 8 */ /* 692 */ 0x1, /* FC_BYTE */ 0x5b, /* FC_END */ /* 694 */ 0x15, /* FC_STRUCT */ 0x3, /* 3 */ /* 696 */ NdrFcShort(0x10), /* 16 */ /* 698 */ 0x8, /* FC_LONG */ 0x6, /* FC_SHORT */ /* 700 */ 0x6, /* FC_SHORT */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 702 */ 0x0, /* 0 */ NdrFcShort(0xffff1), /* Offset= -15 (688) */ 0x5b, /* FC_END */ /* 706 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 708 */ NdrFcShort(0x20), /* 32 */ /* 710 */ NdrFcShort(0x0), /* 0 */ /* 712 */ NdrFcShort(0xa), /* Offset= 10 (722) */ /* 714 */ 0x8, /* FC_LONG */ 0x40, /* FC_STRUCTPAD4 */ /* 716 */ 0x36, /* FC_POINTER */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 718 */ 0x0, /* 0 */ NdrFcShort(0xffffe7), /* Offset= -25 (694) */ 0x5b, /* FC_END */ /* 722 */ 0x11, 0x0, /* FC_RP */ /* 724 */ NdrFcShort(0xffff12), /* Offset= -238 (486) */ /* 726 */ 0x1b, /* FC_CARRAY */ 0x0, /* 0 */ /* 728 */ NdrFcShort(0x1), /* 1 */ /* 730 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 732 */ NdrFcShort(0x0), /* 0 */ /* 734 */ NdrFcShort(0x1), /* Corr flags: early */ /* */ /* 736 */ 0x1, /* FC_BYTE */ </pre>
---	--	--

<pre> FC_END */ /* 738 */ FC_BOGUS_STRUCT */ 0x5b, /* 786 */ /* Corr desc: field pointer, FC ULONG */ 0xa1, /* 788 */ /* NdrFcShort(0x0), /* 0 */ 0x3, /* 790 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 792 */ /* 0x8, /* FC LONG */ 0x5b, /* 794 */ /* FC_END */ 0x40, /* 794 */ /* FC_BOGUS_STRUCT */ 0xb, /* 796 */ /* NdrFcShort(0x10), /* 16 */ 0x12, 0x0, /* 798 */ /* NdrFcShort(0x0), /* 0 */ 0x6, /* 800 */ /* NdrFcShort(0x6), /* Offset= 6 (750) /* 746 */ /* 0x8, /* FC_LONG */ 0x12, 0x0, /* 802 */ /* 0x8, /* FC_LONG */ 0x40, /* 804 */ /* FC_POINTER */ 0xb, /* 806 */ /* FC_END */ 0x1, /* 808 */ /* FC_UP */ /* 752 */ /* NdrFcShort(0xffe6), /* Offset= -26 (726) /* 754 */ 0xb, /* 810 */ /* FC_CARRAY */ 0x1, /* 812 */ /* NdrFcShort(0x2), /* 2 */ /* 758 */ /* 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* 814 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 816 */ /* NdrFcShort(0x0), /* 0 */ /* 818 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 820 */ /* 0xb, /* FC_HYPER */ 0x5b, /* 822 */ /* FC_END */ 0x40, /* 824 */ /* FC_BOGUS_STRUCT */ 0xb, /* 826 */ /* NdrFcShort(0x10), /* 16 */ 0x0, /* 828 */ /* NdrFcShort(0x0), /* 0 */ 0x6, /* 830 */ /* NdrFcShort(0x6), /* Offset= 6 (778) /* 774 */ /* 0x8, /* FC_LONG */ 0x12, 0x0, /* 832 */ /* 0x8, /* FC_POINTER */ 0xb, /* 834 */ /* FC_END */ 0x3, /* 836 */ /* FC_UP */ /* 776 */ /* NdrFcShort(0x10), /* 16 */ /* 778 */ /* 0x0, /* 0 */ /* 828 */ /* NdrFcShort(0x6), /* Offset= 6 (778) /* 774 */ /* 0x8, /* FC_LONG */ 0x40, /* 830 */ /* FC_STRUCTPAD4 */ 0xb, /* 832 */ /* NdrFcShort(0x10), /* 16 */ 0x0, /* 834 */ /* NdrFcShort(0x0), /* 0 */ /* 836 */ /* NdrFcShort(0x10), /* 16 */ /* 838 */ /* NdrFcShort(0x0), /* 0 */ /* 840 */ /* NdrFcShort(0x8), /* 8 /* 842 */ /* 0x8, /* FC_LONG */ 0x8, /* 844 */ /* FC_PAD */ 0xb, /* 846 */ /* FC_END */ 0x3, /* 848 */ /* FC_CARRAY */ 0x1, /* 850 */ /* NdrFcShort(0x8), /* 8 */ /* 852 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 854 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 856 */ /* 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 858 */ /* NdrFcShort(0x38), /* 56 */ /* 860 */ /* NdrFcShort(0xffec), /* Offset= -20 (838) /* 862 */ 0x1, /* 864 */ /* FC_BOGUS_STRUCT */ 0x3, /* 866 */ /* NdrFcShort(0x0), /* 0 */ /* 868 */ /* NdrFcShort(0x0), /* Offset= 0 (868) /* 870 */ 0x6, /* 872 */ /* FC_SHORT */ 0x8, /* 874 */ /* FC_STRUCTPAD4 */ 0x4c, /* 876 */ /* FC_EMBEDDED_COMPLEX */ 0x0, /* 878 */ /* NdrFcShort(0xfe0f), /* Offset= -497 (380) /* 880 */ 0x12, 0x0, /* 882 */ /* FC_UP */ </pre>	<pre> /* 836 */ /* NdrFcShort(0xffe6), /* Offset= -26 (810) /* 838 */ 0x15, /* 840 */ /* NdrFcShort(0x8), /* 8 /* 842 */ /* 0x8, /* FC_LONG */ 0x8, /* 844 */ /* FC_PAD */ 0xb, /* 846 */ /* FC_END */ 0x3, /* 848 */ /* FC_CARRAY */ 0x1, /* 850 */ /* NdrFcShort(0x8), /* 8 */ /* 852 */ /* NdrFcShort(0x1), /* Corr desc: FC USHORT */ /* 854 */ /* NdrFcShort(0x0), /* 0 /* 856 */ /* 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 858 */ /* NdrFcShort(0x38), /* 56 /* 860 */ /* NdrFcShort(0xffec), /* Offset= -20 (846) /* 862 */ 0x1, /* 864 */ /* FC_BOGUS_STRUCT */ 0x3, /* 866 */ /* NdrFcShort(0x0), /* 0 */ /* 868 */ /* NdrFcShort(0x0), /* Offset= 0 (868) /* 870 */ 0x6, /* 872 */ /* FC_SHORT */ 0x8, /* 874 */ /* FC_STRUCTPAD4 */ 0x4c, /* 876 */ /* FC_EMBEDDED_COMPLEX */ 0x0, /* 878 */ /* NdrFcShort(0xfe0f), /* Offset= -497 (380) /* 880 */ 0x12, 0x0, /* 882 */ /* FC_UP */ </pre>
---	--

```

/* 882 */ NdrFcShort( 0xff04 ),           /* Offset= -252 (630) */
/* 884 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 886 */ 0x1,           /* FC_BYTE */
FC_PAD,
/* 888 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 890 */ 0x6,           /* FC_SHORT */
FC_PAD,
/* 892 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 894 */ 0x8,           /* FC_LONG */
FC_PAD,
/* 896 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 898 */ 0xb,           /* FC_HYPER */
FC_PAD,
/* 900 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 902 */ 0xa,           /* FC_FLOAT */
FC_PAD,
/* 904 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 906 */ 0xc,           /* FC_DOUBLE */
FC_PAD,
/* 908 */
0x12, 0x0,          /* FC_UP */
/* 910 */ NdrFcShort( 0xfd2a ),           /* Offset= -606 (304) */
/* 912 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfd4a ),           /* Offset= -604 (310) */
/* 916 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xfd8a ),           /* Offset= -582 (336) */
/* 920 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0fdc8 ),           /* Offset= -568 (354) */
/* 924 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 926 */ NdrFcShort( 0xfdd6 ),           /* Offset= -554 (372) */

/* 928 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 930 */ NdrFcShort( 0x2 ),            /* Offset= 2 (932) */
/* 932 */
0x12, 0x0,          /* FC_UP */
/* 934 */ NdrFcShort( 0x14 ),            /* Offset= 20 (954) */
/* 936 */
0x15,               /* FC_STRUCT */
0x7,
/* 938 */ NdrFcShort( 0x10 ),            /* Offset= 16 */
/* 940 */ 0x6,           /* FC_SHORT */
0x1,
/* 942 */ 0x1,           /* FC_BYTE */
0x8,
/* 944 */ 0xb,           /* FC_HYPER */
0x5b,
/* 946 */
0x12, 0x0,          /* FC_UP */
/* 948 */ NdrFcShort( 0xffff4 ),          /* Offset= -12 (936) */
/* 950 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 952 */ 0x2,           /* FC_CHAR */
0x5c,
/* 954 */
0x1a,
/* 956 */ NdrFcShort( 0x20 ),            /* Offset= 32 */
/* 958 */ NdrFcShort( 0x0 ),             /* 0 */
/* 960 */ NdrFcShort( 0x0 ),            /* Offset= 0 (960) */
/* 962 */ 0x8,           /* FC_LONG */
0x8,
/* 964 */ 0x6,           /* FC_SHORT */
0x6,
/* 966 */ 0x6,           /* FC_SHORT */
0x6,
/* 968 */ 0x4c,           /* FC_EMBEDDED_COMPLEX */
0x0,
/* 970 */ NdrFcShort( 0xfc3c ),          /* Offset= -964 (6) */
/* 972 */ 0x5c,           /* FC_PAD */
0x5b,
/* 974 */ 0xb4,           /* FC_USER_MARSHAL */
0x83,
/* 976 */ NdrFcShort( 0x0 ),             /* 0 */
/* 978 */ NdrFcShort( 0x18 ),            /* 24 */
/* 980 */ NdrFcShort( 0x0 ),             /* 0 */
/* 982 */ NdrFcShort( 0xfc2c ),          /* Offset= -980 (2) */
/* 984 */
0x11, 0x4,          /* FC_RP [alloced_on_stack] */
/* 986 */ NdrFcShort( 0x6 ),             /* Offset= 6 (992) */
/* 988 */
0x13, 0x0,          /* FC_OP */
/* 990 */ NdrFcShort( 0xffdc ),          /* Offset= -36 (954) */
/* 992 */ 0xb4,           /* FC_USER_MARSHAL */
0x83,
/* 994 */ NdrFcShort( 0x0 ),             /* 0 */
/* 996 */ NdrFcShort( 0x18 ),            /* 24 */
/* 998 */ NdrFcShort( 0x0 ),             /* 0 */
/* 1000 */ NdrFcShort( 0xffff4 ),          /* Offset= -12 (988) */
0x0
};

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize,
        VARIANT_UserMarshal,
        VARIANT_UserUnmarshal,
        VARIANT_UserFree
    }
};

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFFFF6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =

```

```

{
0,
44,
88,
132,
176,
220
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
&Object_StubDesc,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
&Object_StubDesc,
0,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0,
0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
0,
NdrOleAllocate,
NdrOleFree,
0,
0
};

```

```

0,
0,
0,
__MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x50002, /* Ndr library version */
0,
0x6000169, /* MIDL Version 6.0.361 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* cs routines */
0, /* proxy/server info */
0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    (CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    (CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define __tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall __tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(!__tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,

```

```

    (const PCInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
0, // no delegation
& _tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uuid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0 /* Filler3 */
};

#endif /* _MSC_VER >= 1200
#pragma warning(pop)
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64) */

```

tpcc_dblib.cpp

```

/* FILE:           TPCC_DBLIB.CPP
 *               Microsoft
TPC-C Kit Ver. 4.42.000
Copyright
Microsoft, 2002
*           All Rights Reserved
*
*           Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*           PURPOSE: Implements dblib calls for TPC-C
txns.
*           Contact: Charles Levine
(clevine@microsoft.com)
*
*           Change history:
*           4.42.000 - changed w_id fields
from short to long to support >32K warehouses
*           4.20.000 - updated rev number to
match kit
*           4.10.001 - not deleting error
class in catch handler on deadlock retry;
*           not a
functional bug, but a memory leak
*           - had to
tweak some declarations to compile with latest SDK;
no functional change
*/
#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

```

```

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE
4096

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const int iMaxRetries = 10;
// how many retries on deadlock
static long iConnectionCount = 0; // number
of current dblib connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit(); // initialize dblib
            break;

        case DLL_PROCESS_DETACH:
            dbexit(); // close all dblib structures/connections
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity,
dberr, oserr, dberrstr, oserrstr );
    }
}

```

```

        return INT_CANCEL;
    }

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT
msgno, int msgstate, int severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library
SQL Server error messages
*
* ARGUMENTS: DBPROCESS          *dbproc
           DBPROCESS id pointer
*
*           msgno             DBINT
*           message number
*
*           msgstate          int
*           message state
*
*           severity          int
*           message severity
*
*           msgtext            char
*           *msgtext           printable
*           message description
*
* RETURNS:      int
*               INT_CONTINUE   continue if
error is SQLETIME else INT_CANCEL action
*
*               INT_CANCEL
*               cancel operation
*
* COMMENTS: This function also sets the dead
lock dbproc variable if necessary.
*/
// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS,
DBINT, INT, INT, LPCSTR, LPCSTR, LPCSTR,
DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity,
LPCSTR
msgtext, LPCSTR srvname, LPCSTR procname, DBUSMALLINT
line)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno,
msgstate, severity, msgtext );
    }
    return 0;
}

```

```

/* FUNCTION: void UtilStrCpy(char * pDest, char *
pSrc, int n)
*
* PURPOSE: This function copies n characters
from string pSrc to pDst and places a
null character at the
end of the destination string.
*
* ARGUMENTS: char
*           *pDest   destination string pointer
*           char
*           *pSrc    source string pointer
*           int
*           n       number of characters to copy
*
* RETURNS: None
*
* COMMENTS: Unlike strncpy this function
ensures that the result string is
terminated.                                always null
*/
inline static void UtilStrCpy(char * pDest, const
BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*/
char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id.name." },
        { ERR_NO SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { 0, "" }
    };
}

```

```

static char szNotFound[] = "Unknown error
number.";

for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_errno ==
errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer,                                // name of
SQL server
    LPCSTR szUser,                                 // user
name for login
    LPCSTR szPassword,                            // password
for login
    LPCSTR szHost,                               // workstation
name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase )                          // name of
database to use
{
    return new CTPCC_DBLIB( szServer, szUser,
szPassword, szHost, szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer,                                // name of
SQL server
    LPCSTR szUser,                                 // user
name for login
    LPCSTR szPassword,                            // password
for login
    LPCSTR szHost,                               // workstation
name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase )                          // name of
database to use
{
    LOGINREC *login;
    const BYTE      *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

    m_MaxRetries = 10;                           // how many
retries on deadlock

    // increase max number of connections if
getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5)
)
    {

```

```

        if (
dbsetmaxprocs(iConnectionCount+10) == FAIL )

            ThrowError(CDBLIBERR::eDbSetMaxProcs);
}

// allocate a login structure
login = dblogin();
if (login == NULL)
    ThrowError(CDBLIBERR::eLogin);
InterlockedIncrement( &iConnectionCount );

// register error and message handler
functions
if (dbprocerhandle(login, err_handler) ==
NULL)

    ThrowError(CDBLIBERR::eDbProcHandler);

if (dbprocmsgshandle(login, msg_handler) ==
NULL)

    ThrowError(CDBLIBERR::eDbProcHandler);

DBSETLUSER(login, szUser);
DBSETLPWD(login, szPassword);
DBSETLHOST(login, szHost);
DBSETLPACKET(login, (unsigned
short)DEFCLPACKSIZE);
DBSETLVERSION(login, DBVER60);
// use dblib ver 6.0 client behavior

// set time to wait for login
if (dbsetlogintime(60) == FAIL)
    ThrowError(CDBLIBERR::eDbSet);

// set time to wait for statement execution
if (dbsettime(180) == FAIL)
    ThrowError(CDBLIBERR::eDbSet);

m_dbproc = dbopen(login, szServer);

// deallocate login structure before
checking for success
dbfreelogin( login );

if (m_dbproc == NULL)
    ThrowError(CDBLIBERR::eDbOpen);

// save address of class instance so that
the message and error handler
// can get to data.
dbsetuserdata(m_dbproc, (LPVOID)this);

// Use the the right database
if (dbuse(m_dbproc, szDatabase) == FAIL)
    ThrowError(CDBLIBERR::eDbUse);

dbcmd(m_dbproc, "set nocount on ");
// do not return row counts
dbcmd(m_dbproc, "set XACT_ABORT ON");
// rollback transaction on abort

```

```

if (dbsqlexec(m_dbproc) == FAIL)

    ThrowError(CDBLIBERR::eDbSqlExec);

DiscardNextResults(2);

// verify that version of stored procs on
server is correct
dbrpcinit(m_dbproc, "tpcc_version", 0);

if (dbrpceexec(m_dbproc) == FAIL)

    ThrowError(CDBLIBERR::eDbRpcExec);

if (dbresults(m_dbproc) != SUCCEED)

    ThrowError(CDBLIBERR::eDbResults);

if (dbnextrow(m_dbproc) != REG_ROW)

    ThrowError(CDBLIBERR::eDbNextRow);

char szSrvVersion[16];
pData=dbdata(m_dbproc, 1);
if (pData)
    UtilStrCpy(szSrvVersion, pData,
dbdatlen(m_dbproc, 1));
else
    szSrvVersion[0]=0;
if (strcmp(szSrvVersion,sVersion))
    throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

DiscardNextRows(0);
DiscardNextResults(0);

}

CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate
resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new
CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

    if (dberrstr != NULL)
    {

```

```

        m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
strcpy( m_DbLibErr->m_dberrstr,
dberrstr );
}

if (oserrstr != NULL)
{
    m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
strcpy( m_DbLibErr->m_oserrstr,
oserrstr );
}
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno,
int msgstate, int severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[
strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext,
msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if
yes, throw it and ignore any DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLERR *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our
pointer to instance; catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to
happen, since it means that an error was returned
        // but the error handlers were
not called.
        pDbLibErr = new
CDBLIBERR(eAction);
    else

```

```

        {
            pDbLibErr = m_DbLibErr;
            pDbLibErr->m_eAction = eAction;
            m_DbLibErr = NULL; // clear our
pointer to instance; catch handler will delete
        }

        throw pDbLibErr;
    }

    // Read and discard rows until no more. Throw an
exception if number of rows read doesn't
// match number of rows expected. The row count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int             iRowsRead = 0;
    RETCODE         rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }

    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iRowsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

    // Read and discard results until no more. Throw an
exception if number of result sets read doesn't
// match number expected. The result set count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int iExpectedCount)
{
    int             iResultsRead = 0;
    RETCODE         rc;

    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)

```

```

            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbResults);
            else
                break;
        }
        DiscardNextRows(-1);
        iResultsRead++;
    }

    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iResultsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

void CTPCC_DBLIB::StockLevel()
{
    int             iTryCount =
0;
    const BYTE      *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_stocklevel", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.StockLevel.w_id); // @w_id int
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.StockLevel.d_id); // @d_id
            tinyint
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.StockLevel.threshold); // @threshhold
            smallint
            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

```

```

if
(pData=dbdata(m_dbproc, 1))

    m_txn.StockLevel.low_stock = *((long *) 
pData);

        DiscardNextRows(0);
DiscardNextResults(0);

m_txn.StockLevel.exec_status_code = eOK;
return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1200
||

(e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_msgtext, sErrTimeoutExpired) != NULL)) &&
(++iTryCount
<= iMaxRetries))
    {
        // hit
deadlock; backoff for increasingly longer period
        delete e;
Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)

//if (iTryCount)
//    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                               i;
    DBINT                commit_flag;
    DBDATETIME           datetime;
    DBDATEREC  daterec;

    int                               iTryCount =
0;
    const BYTE             *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_neworder", 0);

```

```

        dbRPCParam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)  

&m_txn.NewOrder.w_id);                                dbRPCParam(m_dbproc,  

NULL, 0, SQLINT1, -1, -1, (BYTE *)  

&m_txn.NewOrder.d_id);                                dbRPCParam(m_dbproc,  

NULL, 0, SQLINT4, -1, -1, (BYTE *)  

&m_txn.NewOrder.c_id);                                dbRPCParam(m_dbproc,  

NULL, 0, SQLINT1, -1, -1, (BYTE *)  

&m_txn.NewOrder.o.ol_cnt);

        // check whether any  

order lines are for a remote warehouse

        m_txn.NewOrder.o_all_local = 1;  

                                for (i = 0; i <  

m_txn.NewOrder.o.ol_cnt; i++)  

{
                                if  

(m_txn.NewOrder.OL[i].ol_supply_w_id !=  

m_txn.NewOrder.w_id)  

{
                                m_txn.NewOrder.o_all_local = 0; // at  

least one remote warehouse

                                break;
}
}
dbRPCParam(m_dbproc,  

NULL, 0, SQLINT1, -1, -1, (BYTE *)  

&m_txn.NewOrder.o.all_local);

        for (i = 0; i <  

m_txn.NewOrder.o.ol_cnt; i++)
{
        dbRPCParam(m_dbproc, NULL, 0, SQLINT4, -1,  

-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);

        dbRPCParam(m_dbproc, NULL, 0, SQLINT4, -1,  

-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);

        dbRPCParam(m_dbproc, NULL, 0, SQLINT2, -1,  

-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
}

        if (dbRPCExec(m_dbproc)  

== FAIL)

        ThrowError(CDBLIBERR::eDbRpcExec);

        // Get order line  

results

        m_txn.NewOrder.total_amount = 0;  

                                for (i = 0;  

i < m_txn.NewOrder.o.ol_cnt; i++)
{

```

```

if
(dbresults(m_dbproc) != SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);

if
(dbnumcols(m_dbproc) != 5)
    ThrowError(CDBLIBERR::eWrongNumCols);

if
(dbnextrow(m_dbproc) != REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

if(pData=dbdata(m_dbproc, 1))
    UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name,
pData, dbdatlen(m_dbproc, 1));

if(pData=dbdata(m_dbproc, 2))
    m_txn.NewOrder.OL[i].ol_stock =
(*DBSMALLINT *) pData;

if(pData=dbdata(m_dbproc, 3))
    UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_ge-
neric, pData, dbdatlen(m_dbproc, 3));

if(pData=dbdata(m_dbproc, 4))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);

if(pData=dbdata(m_dbproc, 5))

dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount +
m_txn.NewOrder.OL[i].ol_amount;

DiscardNextRows(0);
}

// get remaining values
for w_tax, d_tax, o_id, c_last, c_discount, c_credit,
o_entry_d_commit_flag,
```

```

        if (dbresults(m_dbproc)
!= SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);
        if (dbnextrow(m_dbproc)
!= REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);
        if (dbnumcols(m_dbproc)
!= 8)
    ThrowError(CDBLIBERR::eWrongNumCols);
        if
(pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);
        if
(pData=dbdata(m_dbproc, 2))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);
        if
(pData=dbdata(m_dbproc, 3))

        m_txn.NewOrder.o_id = (*DBINT * ) pData;
        if
(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))
        {
            datetime =
*((DBDATETIME * ) pData);

            dbdatecrack(m_dbproc, &daterec, &datetime);
            m_txn.NewOrder.o_entry_d.year =
daterec.year;

```

```

            m_txn.NewOrder.o_entry_d.month =
daterec.month;

            m_txn.NewOrder.o_entry_d.day =
daterec.day;

            m_txn.NewOrder.o_entry_d.hour =
daterec.hour;

            m_txn.NewOrder.o_entry_d.minute =
daterec.minute;

            m_txn.NewOrder.o_entry_d.second =
daterec.second;
        }
        if
(pData=dbdata(m_dbproc, 8))
        commit_flag =
(*DBTINYINT * ) pData;
        DiscardNextRows(0);
        DiscardNextResults(0);

        if (commit_flag == 1)
{
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
eInvalidItem;
        return;
    }
    catch (CSQLErr *e)
{
    if ((e->m_msgno == 1205
|| (e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_msgrtext, sErrTimeoutExpired) != NULL)) &&
<= iMaxRetries)
    {
        // hit
deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)

```

```

//         if (iTryCount)
//             throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME           datetime;
    DBDATEREC daterec;
    int                  iTryCount =
0;
    const BYTE            *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_payment", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLFLT8, -1, -1, (BYTE *)
&m_txn.Payment.h_amount);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.c_d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_id);
            // if customer id is
zero, then payment is by name
            if (m_txn.Payment.c_id
== 0)
                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char
*)m_txn.Payment.c_last);
            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
        }
        if (dbresults(m_dbproc)
!= SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);
    }
}

```

```

!= REG_ROW)
        if (dbnextrow(m_dbproc)

        ThrowError(CDBLIBERR::eDbNextRow);
        if (dbnumcols(m_dbproc)
!= 27)
        ThrowError(CDBLIBERR::eWrongNumCols);

        if
(pData=dbdata(m_dbproc, 1))

        m_txn.Payment.c_id = *((DBINT *) pData);
        if
(pData=dbdata(m_dbproc, 2))

        UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));
        if
(pData=dbdata(m_dbproc, 3))
{
        datetime =
*((DBDATETIME *) pData);

        dbdatecrack(m_dbproc, &daterec, &datetime);

        m_txn.Payment.h_date.year = daterec.year;
        m_txn.Payment.h_date.month =
daterec.month;
        m_txn.Payment.h_date.day = daterec.day;
        m_txn.Payment.h_date.hour = daterec.hour;
        m_txn.Payment.h_date.minute =
daterec.minute;
        m_txn.Payment.h_date.second =
daterec.second;
}
        if
(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))

        UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))

        UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));

        if
(pData=dbdata(m_dbproc, 8))

        UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
        if
(pData=dbdata(m_dbproc, 9))

        UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
        if
(pData=dbdata(m_dbproc, 10))

        UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
        if
(pData=dbdata(m_dbproc, 11))

        UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
        if
(pData=dbdata(m_dbproc, 12))

        UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
        if
(pData=dbdata(m_dbproc, 13))

        UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
        if
(pData=dbdata(m_dbproc, 14))

        UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));
        if
(pData=dbdata(m_dbproc, 15))

        UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
        if
(pData=dbdata(m_dbproc, 16))

        UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
        if
(pData=dbdata(m_dbproc, 17))

        UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
        if
(pData=dbdata(m_dbproc, 18))

        UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
        if
(pData=dbdata(m_dbproc, 19))

        UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
        if
(pData=dbdata(m_dbproc, 20))

        if
UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
        if
(pData=dbdata(m_dbproc, 21))

        UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
        if
(pData=dbdata(m_dbproc, 22))
{
        datetime =
*((DBDATETIME *) pData);

        dbdatecrack(m_dbproc, &daterec, &datetime);

        m_txn.Payment.c_since.year =
daterec.year;
        m_txn.Payment.c_since.month =
daterec.month;
        m_txn.Payment.c_since.day = daterec.day;
        m_txn.Payment.c_since.hour = daterec.hour;
        m_txn.Payment.c_since.minute =
daterec.minute;
        m_txn.Payment.c_since.second =
daterec.second;
}

if (pData=dbdata(m_dbproc, 23))
    UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
    if (pData=dbdata(m_dbproc, 24))
        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 24), SQLFLT8, (BYTE *)&m_txn.Payment.c_credit_lim, 8);
        if (pData=dbdata(m_dbproc, 25))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 25), SQLFLT8, (BYTE *)&m_txn.Payment.c_discount, 8);
            if (pData=dbdata(m_dbproc, 26))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 26), SQLFLT8, (BYTE *)&m_txn.Payment.c_balance, 8);
                if (pData=dbdata(m_dbproc, 27))
                    UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));
DiscardNextRows(0);

```

```

        DiscardNextResults(0);

        if (m_txn.Payment.c_id
== 0)
            throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else

m_txn.Payment.exec_status_code = eOK;

        return;
    }
    catch (CSQLErr *e)
    {
        if ((e->m_msgno == 1205
||

== iErrOleDbProvider &&
strstr(e->m_msgtext, sErrTimeoutExpired) != NULL) &&
(+iTryCount
<= iMaxRetries))
{
            // hit
deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)

//     if (iTryCount)
//         throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int
DBDATETIME          i;
DBDATETIMEx         datetime;
DBDATERECx          daterec;

    int
iTryCount =
0;
    RETCODE             rc;
const BYTE           *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_orderstatus", 0);

```

```

                dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.w_id);
                dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.OrderStatus.d_id);
                dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.c_id);

                // if customer id is
zero, then order status is by name
                if
(m_txn.OrderStatus.c_id == 0)

                    dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);

                if (dbrpcexec(m_dbproc)
== FAIL)

                    ThrowError(CDBLIBERR::eDbRpcExec);

                // Get order lines
                if (dbresults(m_dbproc)
!= SUCCEED)
{
                    if
((m_DbLibErr == NULL) && (m_SqlErr == NULL))

                        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO SUCH ORDER );
                    else

                        ThrowError(CDBLIBERR::eDbResults);
}
                if (dbnumcols(m_dbproc)
!= 5)

                    ThrowError(CDBLIBERR::eWrongNumCols);

                i = 0;
                while (TRUE)
                {
                    rc =
dbnextrow(m_dbproc);
                    if (rc ==
NO_MORE_ROWS)
                        break;
                    if (rc !=
REG_ROW)

                        ThrowError(CDBLIBERR::eDbNextRow);

                    if (pData=dbdata(m_dbproc, 1))

                        m_txn.OrderStatus.OL[i].ol_supply_w_id =
(* (DBSMALLINT *) pData);

```

```

if (pData=dbdata(m_dbproc, 2))

m_txn.OrderStatus.OL[i].ol_i_id = (* (DBINT
*) pData);

if (pData=dbdata(m_dbproc, 3))

m_txn.OrderStatus.OL[i].ol_quantity =
(* (DBSMALLINT *) pData);

if (pData=dbdata(m_dbproc, 4))

dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,4),

SQLFLT8, (BYTE
*) &m_txn.OrderStatus.OL[i].ol_amount, 8);

if (pData=dbdata(m_dbproc, 5))
{
    datetime = *((DBDATETIME *) pData);

    dbdatecrack(m_dbproc, &daterec, &datetime);

    m_txn.OrderStatus.OL[i].ol_delivery_d.year =
daterec.year;

    m_txn.OrderStatus.OL[i].ol_delivery_d.month =
daterec.month;

    m_txn.OrderStatus.OL[i].ol_delivery_d.day =
daterec.day;

    m_txn.OrderStatus.OL[i].ol_delivery_d.hour =
daterec.hour;

    m_txn.OrderStatus.OL[i].ol_delivery_d.minute =
daterec.minute;

    m_txn.OrderStatus.OL[i].ol_delivery_d.second =
daterec.second;
}
    i++;
}

m_txn.OrderStatus.o_ol_cnt = i;

if (dbresults(m_dbproc)
!= SUCCEED)

ThrowError(CDBLIBERR::eDbResults);

if (dbnextrow(m_dbproc)
!= REG_ROW)

ThrowError(CDBLIBERR::eDbNextRow);

if (dbnumcols(m_dbproc)
!= 8)

```

```

ThrowErrorHandler(CDBLIBERR::eWrongNumCols);

if(pData=dbdata(m_dbproc, 1))
    m_txn.OrderStatus.c_id = (*DBINT *)pData;

if(pData=dbdata(m_dbproc, 2))
    UtilStrCpy(m_txn.OrderStatus.c_last, pData,
    dbdatalen(m_dbproc,2));

if(pData=dbdata(m_dbproc, 3))
    UtilStrCpy(m_txn.OrderStatus.c_first,
    pData, dbdatalen(m_dbproc,3));

if(pData=dbdata(m_dbproc, 4))
    UtilStrCpy(m_txn.OrderStatus.c_middle,
    pData, dbdatalen(m_dbproc, 4));

if(pData=dbdata(m_dbproc, 5))
{
    datetime =
*((DBDATETIME *) pData);

    dbdatecrack(m_dbproc, &daterec, &datetime);

    m_txn.OrderStatus.o_entry_d.year =
daterec.year;

    m_txn.OrderStatus.o_entry_d.month =
daterec.month;

    m_txn.OrderStatus.o_entry_d.day =
daterec.day;

    m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;

    m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;

    m_txn.OrderStatus.o_entry_d.second =
daterec.second;
}

if(pData=dbdata(m_dbproc, 6))
    m_txn.OrderStatus.o_carrier_id =
(*DBSMALLINT *) pData;

if(pData=dbdata(m_dbproc, 7))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatalen(m_dbproc,7),
SQLFLT8, (BYTE *)
*)&m_txn.OrderStatus.c_balance;

```

```

if(pData=dbdata(m_dbproc, 8))
    m_txn.OrderStatus.o_id = (*DBINT *)pData;

DiscardNextRows(0);
DiscardNextResults(0);

if
(m_txn.OrderStatus.o.ol_cnt == 0)           throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER
);

else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c.last[0] == 0)           throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
else

m_txn.OrderStatus.exec_status_code = eOK;
return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
||                               (e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_msgrtext, sErrTimeoutExpired) != NULL)) &&
(iTryCount
<= iMaxRetries))
    {
        // hit
deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)
}
// if (iTryCount)
    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int
    int
    i;
    iTryCount =
0;
    const BYTE
    *pData;
    ResetError();
}

```

```

while (TRUE)
{
    try
    {
        dbrpcinit(m_dbproc,
"tpcc_delivery", 0);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.o_carrier_id);
        if (dbrpcexec(m_dbproc)
== FAIL)
            ThrowErrorHandler(CDBLIBERR::eDbRpcExec);
        if (dbresults(m_dbproc)
!= SUCCEED)
            ThrowErrorHandler(CDBLIBERR::eDbResults);
        if (dbnextrow(m_dbproc)
!= REG_ROW)
            ThrowErrorHandler(CDBLIBERR::eDbNextRow);
        if (dbnumcols(m_dbproc)
!= 10)
            ThrowErrorHandler(CDBLIBERR::eWrongNumCols);
        for (i=0; i<10; i++)
        {
            if (pData =
dbdata(m_dbproc, i+1))
                m_txn.Delivery.o_id[i] = *((DBINT *)pData);
            DiscardNextRows(0);
            DiscardNextResults(0);

            m_txn.Delivery.exec_status_code = eOK;
            return;
        }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno == 1205
||                               (e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_msgrtext, sErrTimeoutExpired) != NULL)) &&
(iTryCount
<= iMaxRetries))
            {
                // hit
deadlock; backoff for increasingly longer period
            }
}
}

```

```

        delete e;
        Sleep(10 *
iTtryCount);

    }
    else
        throw;
}
} // while (TRUE)

// if (iTtryCount)
//     throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTtryCount);
}

void CTPCC_DBLIBB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }
    return;
}

```

tpcc_odbc.cpp

```

/* FILE:           TPCC_ODBC.CPP
 *               Microsoft
TPC-C Kit Ver. 4.42.000
 *               Copyright
Microsoft, 2002
 *               All Rights Reserved
 *
 *               Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 * PURPOSE: Implements ODBC calls for TPC-C
txns.
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 * Change history:
 *               4.42.000 - changed w_id fields
from short to long to support >32K warehouses
 *               4.20.000 - updated rev number to
match kit
 *               4.10.001 - not deleting error
class in catch handler on deadlock retry;
 *               not a
functional bug, but a memory leak
 */

#include <windows.h>
#include <stdio.h>

```

```

#include <assert.h>

#define DBNTWIN32
#include <sqatypes.h>
#include <sql.h>
#include <sqlext.h>

//define COMPILE_FOR_SNAC // define that to
compile for SQL Native Client; comment out to use
MDAC

#ifndef COMPILE_FOR_SNAC
#include <odbc.css.h>
#else
// Compile for SNAC
#include <sqlncli.h>
#endif

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl _declspec( dllexport )

#include "...\\common\\src\\error.h"
#include "...\\common\\src\\trans.h"
#include "...\\common\\src\\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 3; // how many
retries on deadlock
//const iMaxRetries = 0; // for
debugging

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV; // ODBC environment handle

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv) != SQL_SUCCESS )
                return FALSE;
            break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)
                SQLFreeEnv(henv);
    }
}

```

```

        break;

default: /* nothing */
}

return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
 */
char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { ERR_INVALID_NEW_ORDER_PARAM,
        "New Order parameter invalid." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, // user name for login
LPCSTR szPassword, // password
for login

```

```

LPCSTR szHost,           //  

not used    LPCSTR szDatabase,      // name of  

database to use  
    LPCSTR szSPPrefix,        // prefix to  

append to the stored procedure names  
    BOOL bCallNoDuplicatesNewOrder ) // whether  

to check for non-duplicate items in NewOrder and call  

a new SP  

{  

    return new CTPCC_ODBC( szServer, szUser,  

szPassword, szHost, szDatabase, szSPPrefix,  

bCallNoDuplicatesNewOrder );  

}  

CTPCC_ODBC::CTPCC_ODBC (  

    LPCSTR szServer,  

// name of SQL server  

    LPCSTR szUser,  

// user name for login  

    LPCSTR szPassword,  

// password for login  

    LPCSTR szHost,  

// not used  

    LPCSTR szDatabase,  

// name of database to use  

    LPCSTR szSPPrefix,  

// prefix to append to the stored procedure  

names  

    BOOL      bCallNoDuplicatesNewOrder //  

whether to check for non-duplicate items in NewOrder  

and call a new SP  

)  

:  

m_bCallNoDuplicatesNewOrder(bCallNoDuplicatesNewOrder  

)  

{  

    RETCODE      rc;  

// initialization  

    m_hdbc = SQL_NULL_HDBC;  

    m_hstmt = SQL_NULL_HSTMT;  

    m_hstmtNewOrder = SQL_NULL_HSTMT;  

    m_hstmtPayment = SQL_NULL_HSTMT;  

    m_hstmtDelivery = SQL_NULL_HSTMT;  

    m_hstmtOrderStatus = SQL_NULL_HSTMT;  

    m_hstmtStockLevel = SQL_NULL_HSTMT;  

    m_descNewOrderCols1 = SQL_NULL_HDESC;  

    m_descNewOrderCols2 = SQL_NULL_HDESC;  

    m_descOrderStatusCols1 = SQL_NULL_HDESC;  

    m_descOrderStatusCols2 = SQL_NULL_HDESC;  

    wcsncpy(m_szSPPrefix, szSPPrefix,  

sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));  

    if ( SQLAllocHandle(SQL_HANDLE_DBC, henv,  

&m_hdbc) != SQL_SUCCESS )  

        ThrowError(CODBCERR::eAllocHandle);
}

```

```

        if ( SQLSetConnectOption(m_hdbc,  

SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )  

            ThrowError(CODBCERR::eConnOption);  

{  

    char szConnectStr[256];  

    char szOutStr[1024];  

    SQLSMALLINT iOutStrLen;  

#ifndef COMPILE_FOR_SNAC  

    sprintf( szConnectStr,  

"DRIVER=SQL  

Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",  

szServer, szUser,  

szPassword, szDatabase );  

#else  

    // Compile for SNAC  

    sprintf( szConnectStr,  

"DRIVER=SQL Native  

Client;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",  

szServer, szUser,  

szPassword, szDatabase );  

#endif  

    rc = SQLDriverConnect(m_hdbc,  

NULL, (SQLCHAR*)szConnectStr, sizeof(szConnectStr),  

(SQLCHAR*)szOutStr,  

sizeof(szOutStr), &iOutStrLen, SQL_DRIVER_NOPROMPT );  

    if (rc != SQL_SUCCESS && rc !=  

SQL_SUCCESS_WITH_INFO)  

        ThrowError(CODBCERR::eConnect);  

    if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,  

&m_hstmt) != SQL_SUCCESS)  

        ThrowError(CODBCERR::eAllocHandle);  

{  

    char buffer[128];  

// set some options affecting  

connection behavior  

    strcpy(buffer, "set nocount on  

set XACT_ABORT ON");  

    rc = SQLExecDirect(m_hstmt,  

(unsigned char *)buffer, SQL_NTS);  

    if (rc != SQL_SUCCESS && rc !=  

SQL_SUCCESS_WITH_INFO)  

        ThrowError(CODBCERR::eExecDirect);  

// verify that version of stored  

procs on server is correct  

    char db_sp_version[10];  

    strcpy(buffer, "{call  

tpcc_version}");  


```

```

        rc = SQLExecDirect(m_hstmt,  

(unsigned char *)buffer, SQL_NTS);  

        if (rc != SQL_SUCCESS && rc !=  

SQL_SUCCESS_WITH_INFO)  

        ThrowError(CODBCERR::eExecDirect);  

        if (SQLBindCol(m_hstmt, 1,  

SQL_C_CHAR, &db_sp_version, sizeof(db_sp_version),  

NULL) != SQL_SUCCESS )  

        ThrowError(CODBCERR::eBindCol);  

        if (SQLFetch(m_hstmt) ==  

SQL_ERROR )  

        ThrowError(CODBCERR::eFetch);  

        if  

(strncmp(db_sp_version,sVersion))  

        throw new  

CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION  

);  

        SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmt);  

// Bind parameters for each of the  

transactions  

    InitNewOrderParams();  

    InitPaymentParams();  

    InitOrderStatusParams();  

    InitDeliveryParams();  

    InitStockLevelParams();  

}  

CTPCC_ODBC::~CTPCC_ODBC( void )  

{  

    // note: descriptors are automatically  

released when the connection is dropped  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtNewOrder);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtPayment);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtDelivery);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtOrderStatus);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtStockLevel);  

    SQLDisconnect(m_hdbc);  

    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);  

}  

//void CTPCC_ODBC::ThrowError( CODBCERR::ACTION  

eAction )  

void CTPCC_ODBC::ThrowError( RETCODE eAction )  

{  

    RETCODE      rc;  

    SDWORD      lNativeError;  

    char        szState[6];  

    char        szMsg[SQL_MAX_MESSAGE_LENGTH];
}
```

```

char
szTmp[6*SQL_MAX_MESSAGE_LENGTH];
CODECERR *pODBCErr;
// not allocated until needed (maybe never)

pODBCErr = new CODECERR();

pODBCErr->m_NativeError = 0;
//pODBCErr->m_eAction = eAction;
pODBCErr->m_eAction =
(CODECERR::ACTION)eAction;
pODBCErr->m_bDeadLock = FALSE;

szTmp[0] = 0;
szMsg[0] = 0;
while (TRUE)
{
    rc = SQLAllocHandle(henv, m_hdrc,
m_hstmt, (BYTE *)&szState, &lNativeError,
(BYTE *)&szMsg, sizeof(szMsg), NULL);
    if (rc == SQL_NO_DATA)
    {
        break;
    }

    if (rc != SQL_SUCCESS)
    {
        break;
    }

    // check for deadlock
    if (lNativeError == 1205 ||
(lNativeError == iErrOleDbProvider &
strstr(szMsg,
sErrMsgTimeoutExpired) != NULL))
        pODBCErr->m_bDeadLock =
TRUE;

    // capture the (first) database
error
    if (pODBCErr->m_NativeError == 0
&& lNativeError != 0)
        pODBCErr->m_NativeError
= lNativeError;

    // quit if there isn't enough
room to concatenate error text
    if ((strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)))
        break;

    // include line break after first
error msg
    if (szTmp[0] != 0)
        strcat( szTmp, "\n");
    strcat( szTmp, szMsg );
}

if (pODBCErr->m_odberrstr != NULL)
{
    delete [] pODBCErr->m_odberrstr;
pODBCErr->m_odberrstr = NULL;
}

```

```

    }

    if (strlen(szTmp) > 0)
    {
        pODBCErr->m_odberrstr = new
char[ strlen(szTmp)+1 ];
        strcpy( pODBCErr->m_odberrstr,
szTmp );
    }

    SQLFreeStmt(m_hstmt, SQL_CLOSE);
    throw pODBCErr;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdrc, &m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(CODECERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODECERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODECERR::eBindCol);

    //Compose Stock Level statement
    _snprintf(m_szStockLevelCommand,
sizeof(m_szStockLevelCommand)/sizeof(m_szStockLevelCommand[0]),
L"(call %stpcc_stocklevel
(?, ?, ?))", m_szSPPrefix);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE rc;
    int iTryCount =
0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {

```

```

            rc =
SQLExecDirectW(m_hstmt, m_szStockLevelCommand,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODECERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR )
                ThrowError(CODECERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            m_txm.StockLevel.exec_status_code = eOK;
            break;
        }
        catch (CODECERR *e)
        {
            if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;
            // hit deadlock;
backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdrc, &m_hstmtNewOrder) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_STMT, m_hdrc,
&m_hstmtNewOrderNoDuplicates) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderCols1) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderCols2) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderNoDuplicatesCols1) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderNoDuplicatesCols2) != SQL_SUCCESS
)
        ThrowError(CODECERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;

```

```

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_cnt, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX OL NEW ORDER ITEMS;
j++)
{
    if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);
}

// set the bind offset pointer
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_BindOffset,
SQL_IS_POINTER ) != SQL_SUCCESS )

    ThrowError(CODBCERR::eSetStmtAttr);

i = 0;
if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS

```

```

    || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    // associate the column bindings for the
second result set
    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
&m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    //Compose the New Order statement
    _snwprintf(m_szNewOrderCommand,
sizeof(m_szNewOrderCommand)/sizeof(m_szNewOrderCommand
d[0]),
                // 0          1          2
012345678901234567890123456789
L"%call
%stpcc_neworder(?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
................................................................

```

```

    m_iBeginNewOrderVariablePart = 29 +
wcslen(m_szSPPrefix);           // fixed part + prefix
part
////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
// Now initialize New Order that
works on no duplicate (w_id,i_id) pairs
// and returns one result set for
lineitem details.
//
//      _hstmt = m_hstmtNewOrderNoDuplicates;
//
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

    ThrowError(CODBCERR::eSetStmtAttr);

i = 0;
if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);

for (int j=0; j<MAX OL NEW ORDER ITEMS;
j++)
{
    if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);
}

```

```

// set row-wise binding
if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.NewOrder.OL[0]),
SQL_IS_UINTEGER ) != SQL_SUCCESS
    || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) != SQL_SUCCESS )

    ThrowError(CODBCERR::eSetStmtAttr);

i = 0;
if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindCol);

// associate the column bindings for the
second result set
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) != SQL_SUCCESS )

    ThrowError(CODBCERR::eSetStmtAttr);

i = 0;
if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &_txn.NewOrder.w_tax, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &_txn.NewOrder.d_tax, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &_txn.NewOrder.c_last, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindCol);

```

```

        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                                break;
    }

    while (TRUE)
    {
        try
        {
            m_BindOffset = 0;
            rc =
SQLExecdirectW(m_hstmt, szSqlTemplate, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

                                // Get order line
results

            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
i < m_txn.NewOrder.o.ol_cnt; i++)
            {
                // set the
bind offset value...
m_BindOffset
= i * sizeof(m_txn.NewOrder.OL[0]);
                if (
SQLFetch(m_hstmt) == SQL_ERROR)

                    ThrowError(CODBCERR::eFetch);

                                // move to
the next resultset
                if (
SQLMoreResults(m_hstmt) == SQL_ERROR )

                    ThrowError(CODBCERR::eMoreResults);

m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
            }

                                // associate the column
bindings for the second result set
            if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

                ThrowError(CODBCERR::eSetStmtAttr);

                if ( SQLFetch(m_hstmt)
== SQL_ERROR)

                    ThrowError(CODBCERR::eFetch);

SQLFreeStmt(m_hstmt,
SQL_CLOSE);

```

```

ThrowErrorHandler(CODBCERR::eExecDirect);

        // configure block
cursor
        if
(SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OI_NEW_ORDER_ITEMS, 0) !=

SQL_SUCCESS)

ThrowErrorHandler(CODBCERR::eSetStmtAttr);

        // Get order line
results
        if ( SQLFetch(m_hstmt)

== SQL_ERROR)

ThrowErrorHandler(CODBCERR::eFetch);

m_txn.NewOrder.total_amount = 0;
for (i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)
{
    m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
}

// associate the column
bindings for the second result set
if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=

SQL_SUCCESS )

ThrowErrorHandler(CODBCERR::eSetStmtAttr);

        // move to the next
resultset
        if (
SQLMoreResults(m_hstmt) == SQL_ERROR )

ThrowErrorHandler(CODBCERR::eMoreResults);

        if ( (rc =
SQLFetch(m_hstmt)) == SQL_ERROR)

ThrowErrorHandler(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

        // Check Fetch return
code for no rows returned.          // It means customer id
or warehouse id were invalid.
        if ( (rc == SQL_NO_DATA)

```

```

        throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_INVALID_NEW_ORDER_
PARAM);

        if (m_no_commit_flag ==
1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
eInvalidItem;

        break;
    }
    catch (CODBCERR *e)
    {
        if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

// if (iTryCount)
//     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitPaymentParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtPayment) != SQL_SUCCESS )

        ThrowErrorHandler(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtPayment;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
&m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS

```

```

        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.Payment.c_last), 0,
&m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
NULL) != SQL_SUCCESS
)
        ThrowErrorHandler(CODBCERR::eBindParam);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.Payment.c_id, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_1,
sizeof(m_txn.Payment.w_street_1), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_2,
sizeof(m_txn.Payment.w_street_2), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_city,
sizeof(m_txn.Payment.w_city), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_state,
sizeof(m_txn.Payment.w_state), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_zip,
sizeof(m_txn.Payment.w_zip), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_1,
sizeof(m_txn.Payment.d_street_1), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_2,
sizeof(m_txn.Payment.d_street_2), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_city,
sizeof(m_txn.Payment.d_city), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_state,
sizeof(m_txn.Payment.d_state), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_zip,

```

```

        sizeof(m_txn.Payment.d_zip), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_first,
sizeof(m_txn.Payment.c_first), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_middle,
sizeof(m_txn.Payment.c_middle), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_1,
sizeof(m_txn.Payment.c_street_1), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_2,
sizeof(m_txn.Payment.c_street_2), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_city,
sizeof(m_txn.Payment.c_city), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_state,
sizeof(m_txn.Payment.c_state), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_zip,
sizeof(m_txn.Payment.c_zip), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_phone,
sizeof(m_txn.Payment.c_phone), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_credit,
sizeof(m_txn.Payment.c_credit), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_credit_lim, 0, NULL)
!= SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_discount, 0,
NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_balance, 0,
NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_data,
sizeof(m_txn.Payment.c_data), NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

        //Compose Payment statement
        snprintf(m_szPaymentCommand,
sizeof(m_szPaymentCommand)/sizeof(m_szPaymentCommand[0]),
        L"{call %stpc_payment
(?,?,?,?,?,?)", m_szSPPrefix);

```

```

    }

void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount = 0;

    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szPaymentCommand, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);

            if (m_txn.Payment.c_id == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code = eOK;
        }
        break;
    }
    catch (CODBCERR *e)
    {
        if (!e->m_bDeadLock)
            if (++iTryCount > iMaxRetries)
                throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

// if (iTryCount)
//     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{

```

```

    if (SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtOrderStatus;

    if (SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER) != SQL_SUCCESS)
        ThrowError(CODBCERR::eSetStmtAttr);

    int i = 0;
    if (SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);

    // configure block cursor
    if (SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) != SQL_SUCCESS
|| SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if (SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_supply_w_id, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_i_id, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.OL[0].ol_quantity, 0,
NULL) != SQL_SUCCESS
)

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.OL[0].ol_delivery_d, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_first,
sizeof(m_txn.OrderStatus.c_first), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_middle,
sizeof(m_txn.OrderStatus.c_middle), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.o_carrier_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.c_balance, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.o_id, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    //Compose Order Status statement
    _snprintf(m_szOrderStatusCommand,
sizeof(m_szOrderStatusCommand)/sizeof(m_szOrderStatusCommand[0]),
    L"(call %stpcc_orderstatus
(%?, ?, ?, ?)", m_szSPPrefix);
}

void CTPCC_ODBC::OrderStatus()
{
    int             iTryCount = 0;
    RETCODE         rc;

```

```

    m_hstmt = m_hstmtOrderStatus;
    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;
    while (TRUE)
    {
        try
        {
            if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

            cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )

                ThrowError(CODBCERR::eSetStmtAttr);

            rc =
SQLExecDirectW(m_hstmt, m_szOrderStatusCommand,
SQL_NTS);
                if (rc != SQL_SUCCESS_WITH_INFO)
                    ThrowError(CODBCERR::eExecDirect);

            cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OI_ORDER_STATUS_ITEMS, 0) != SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

            rc = SQLFetchScroll(
m_hstmt, SQL_FETCH_NEXT, 0 );
                if ( !(rc == SQL_SUCCESS) || ((rc == SQL_SUCCESS_WITH_INFO) &&
(m_RowsFetched != 0)) )
                    if ( (rc != SQL_SUCCESS) )
                        ThrowError(CODBCERR::eFetchScroll);

            m_txn.OrderStatus.o_ol_cnt =
(short)m_RowsFetched;
                if
(m_txn.OrderStatus.o_ol_cnt != 0)
                    if (
SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) != SQL_SUCCESS )

```

```

            ThrowError(CODBCERR::eSetStmtAttr);

// SQLMoreResults(m_hstmt) == SQL_ERROR
if ( (rc = SQLMoreResults(m_hstmt)) != SQL_SUCCESS )
{
    ThrowError(CODBCERR::eMoreResults);
}

// SQLFetch(m_hstmt) == SQL_ERROR
if ( (rc = SQLFetch(m_hstmt)) != SQL_SUCCESS )
{
    ThrowError(CODBCERR::eFetch);
}

SQLFreeStmt(m_hstmt,
SQL_CLOSE);
if
(m_txn.OrderStatus.o_ol_cnt == 0)
    throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO SUCH ORDER );
else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
else

m_txn.OrderStatus.exec_status_code = eOK;
break;
}
catch (CODBCERR *e)
{
    if (!e->m_bDeadLock)
        if (++iTryCount > iMaxRetries)
            throw;
        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

// if (iTryCount)
//     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS )

```

```

ThrowErrorHandler(CODBCERR::eAllocHandle);

m_hstmt = m_hstmtDelivery;

int i = 0;
if (SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
)
    ThrowErrorHandler(CODBCERR::eBindParam);

for (i=0;i<10;i++)
{
    if (SQLBindCol(m_hstmt,
(UWORD)(i+1), SQL_C_SLONG, &m_txn.Delivery.o_id[i],
0, NULL) != SQL_SUCCESS)

        ThrowErrorHandler(CODBCERR::eBindCol);
}

//Compose Delivery statement
_snwprintf(m_szDeliveryCommand,
sizeof(m_szDeliveryCommand)/sizeof(m_szDeliveryCommand
d[0]),
L"{call *stpcc_delivery (?,?)}",
m_szSPPrefix);
}

void CTPCC_ODBC::Delivery()
{
    RETCODE          rc;
    int             iTryCount =
0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szDeliveryCommand,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowErrorHandler(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt)
== SQL_ERROR)
                ThrowErrorHandler(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);
            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
    }
}

```

```

        catch (CODBCERR *e)
        {
            if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;
            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
    // throw new
    CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

```

tpcc_odbc.h

```

/*
 *      FILE:           TPCC_ODBC.H
 *                      Microsoft
 *                      Microsoft, 1999
 *                      All Rights Reserved
 *                      Version
 *                      audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 *
 *      PURPOSE: Header file for TPC-C txn class
 * implementation.
 *
 *      Change history:
 *                      4.20.000 - updated rev number to
 * match kit
 */
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

#define iMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        // error from SQLAllocConnect
        eAllocHandle,
        // error from SQLAllocHandle
    }
}

```

```

eConnOption,
// error from SQLSetConnectOption
eConnect,
// error from SQLConnect
eAllocStmt,
// error from SQLAllocStmt
eExecDirect,
// error from SQLExecDirect
eBindParam,
// error from SQLBindParameter
eBindCol,
// error from SQLBindCol
eFetch,
// error from SQLFetch
eFetchScroll,
// error from SQLFetchScroll
eMoreResults,
// error from SQLMoreResults
ePrepare,
// error from SQLPrepare
eExecute,
// error from SQLExecute
eSetEnvAttr,
// error from SQLSetEnvAttr
eSetStmtAttr
// error from SQLSetStmtAttr
};

CODBCERR(void)
{
    m_eAction = eNone;
    m_NativeError = 0;
    m_bDeadLock = FALSE;
    m_odbcerrstr = NULL;
}

~CODBCERR()
{
    if (m_odbcerrstr !=
NULL)
        delete []
    m_odbcerrstr;
}

ACTION    m_eAction;
int      m_NativeError;
BOOL    m_bDeadLock;
char   *m_odbcerrstr;

int      ErrorType();
{return ERR_TYPE_ODBC;};
char*   ErrorTypeStr() { return
"ODBC"; }
int      ErrorNum();
{return m_NativeError;};
char*   ErrorText() { return
m_odbcerrstr; }
int      ErrorAction();
{return (int)m_eAction; }

class CTPCC_ODBC_ERR : public CBaseErr

```

```

{
    public:
        enum TPCC_ODBC_ERRS
        {
            ERR_WRONG_SP_VERSION =
1,           // "Wrong version of stored procs on
database server"
            ERR_INVALID_CUST,
            // "Invalid Customer id,name."
            ERR_NO SUCH_ORDER,
            // "No orders found for
customer."
            ERR_RETRY_TRANS,
            // "Retries before transaction
succeeded."
            ERR_INVALID_NEW_ORDER_PARAM // "New Order
parameter invalid."
        };

        CTPCC_ODBC_ERR( int iErr ) {
            m_errno = iErr; m_iTryCount = 0;
        }

        CTPCC_ODBC_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

        int             m_errno;
        int             m_iTryCount;
        int             ErrorType();
        char*          ErrorTypeStr() { return
"TPCC ODBC"; }
        int             ErrorNum();
        { return m_errno; };
        char*          ErrorText();
};

class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
    private:
        // declare variables and private
functions here...
        BOOL             m_bDeadlock;
        // transaction was selected as
deadlock victim
        int              m_MaxRetries;
        // retry
count on deadlock

        SQLHENV         m_henv;
        // ODBC environment
handle
        SQLHDBC         m_hdbc;
        SQLHSTMT        m_hstmt;
        // the current hstmt

        SQLHSTMT        m_hstmtNewOrder;
        SQLHSTMT        m_hstmtNewOrderNoDuplicates; // NewOrder
with one result set for lineitem details

```

```

SQLHSTMT        m_hstmtPayment;
SQLHSTMT        m_hstmtDelivery;
SQLHSTMT        m_hstmtOrderStatus;
SQLHSTMT        m_hstmtStockLevel;

SQLHDESC        m_descNewOrderCols1;
SQLHDESC        m_descNewOrderCols2;
SQLHDESC        m_descNewOrderNoDuplicatesCols1; // NewOrder with one result set for lineitem details
SQLHDESC        m_descNewOrderNoDuplicatesCols2; // NewOrder with one result set for lineitem details
SQLHDESC        m_descOrderStatusCols1;
SQLHDESC        m_descOrderStatusCols2;

wchar_t          m_szSPPrefix[32]; // stored procedures
prefix

wchar_t          m_szNewOrderCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szNewOrderNoDuplicatesCommand[iMAX_SP_NAME_LEN];
int             m_iBeginNewOrderVariablePart; // begining
of the variable part in NewOrder statement
int             m_iBeginNewOrderNoDuplicatesVariablePart;
// begining of the variable part in
NewOrder statement
wchar_t          m_szPaymentCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szDeliveryCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szOrderStatusCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szStockLevelCommand[iMAX_SP_NAME_LEN];

// new-order specific fields
SQLINTEGER       m_BindOffset;
SQLINTEGER       m_RowsFetched;
int             m_no_commit_flag;
// tpcc_neworder_new flag
BOOL            m_bCallNoDuplicatesNewOrder;

//void ThrowError(
CDBCERR::ACTION eAction );
void ThrowError( RETCODE eAction
);

void InitNewOrderParams();
void InitPaymentParams();
void InitDeliveryParams();
void InitStockLevelParams();
void InitOrderStatusParams();

```

```

union
{
    NEW_ORDER_DATA
    Payment;
    Delivery;
    StockLevel;
    OrderStatus;
} m_txn;

bool DuplicatesInNewOrder();
void NewOrderDuplicates();
void NewOrderNoDuplicates();

public:
    CTPCC_ODBC( LPCSTR
szServer, LPCSTR szUser, LPCSTR szPassword,
LPCSTR szHost, LPCSTR szDatabase,
LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );
    ~CTPCC_ODBC(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_txn.NewOrder; }
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_txn.Payment; }
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_txn.Delivery; }
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_txn.StockLevel; }
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; }

    void NewOrder();
    void Payment();
    void Delivery();
    void StockLevel();
    void OrderStatus();
};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
(
    LPCSTR szServer, LPCSTR szUser,
    LPCSTR szHost, LPCSTR szDatabase,
    LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );

```

```
typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCWSTR, BOOL);
```

tpcc_oledb.cpp

```
/* FILE: TPCC_OLEDB.CPP
 * Microsoft
TPC-C Kit Ver. 4.42.000
 * Copyright
Microsoft, 2004
 * Written by
Sergey Vasilevskiy
 * All Rights Reserved
 *
 *
PURPOSE: Implements OLEDB calls for TPC-C
txns.
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 */
#include <windows.h>
#include <stdio.h>
#include <assert.h>
#include <stddef.h>

#define DBINITCONSTANTS
#include <oledb.h>
//#include <sqleodbc.h> // Use MDAC
#include <sqlncli.h> // Use SNAC
#include <oledberr.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_oledb.h"

#ifndef SQL_MAX_MESSAGE_LENGTH
#define SQL_MAX_MESSAGE_LENGTH 512
#endif

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const int iMaxRetries = 10; // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";
```

```
// this needs to be the same as the max length of
machine/database/user/password in Benchcraft
(engstut.h)
const static int iMaxNameLen = 32;

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            break;

        case DLL_PROCESS_DETACH:
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

/* FUNCTION: CTPCC_OLEDB_ERR::ErrorText
 */
char* CTPCC_OLEDB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { 0,
        "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
}
```

```
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_OLEDB* CTPCC_OLEDB_new(
    LPCSTR szServer, // name of
SQL server
    LPCSTR szUser, // user name for login
    LPCSTR szPassword, // password
for login
    LPCSTR szHost, // not used
    LPCSTR szDatabase, // name of
database to use
    LPCWSTR szSPPrefix ) // prefix to append to the stored procedure names
{
    return new CTPCC_OLEDB( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix );
}

CTPCC_OLEDB::CTPCC_OLEDB (
    LPCSTR szServer, // name of SQL server
    LPCSTR szUser, // user name for login
    LPCSTR szPassword, // password for login
    LPCSTR szHost, // not used
    LPCSTR szDatabase, // name of database to use
    LPCWSTR szSPPrefix // prefix to append to the stored procedure
names
)
: m_pIMalloc(NULL)
{
    int iRc;
    int i;
    i;
    HRESULT hr;

    IDBInitialize*
    pIDBInitialize = NULL; // data source interface
    IDBProperties*
    pIDBProperties = NULL;
    ICommandText*
    pICommandText;
    // SQL command without parameters
    wchar_t szwServer[iMaxNameLen];
    Unicode string used to convert to BSTR
}
```

```

wchar_t
szwDatabase[iMaxNameLen];      // Unicode
string used to convert to BSTR
wchar_t
szwUser[iMaxNameLen];          // Unicode
string used to convert to BSTR
wchar_t
szwPassword[iMaxNameLen];      // Unicode
string used to convert to BSTR

// Copy stored procedures prefix
wcsncpy(m_szSPPrefix, szSPPrefix,
sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));

// Convert single byte ANSI strings to
Unicode (for later conversion to BSTR)
iRC = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szServer, (int)strlen(szServer)+1,
szwServer, iMaxNameLen);
iRC = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szDatabase,
(int)strlen(szDatabase)+1, szwDatabase, iMaxNameLen);
iRC = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szUser, (int)strlen(szUser)+1,
szwUser, iMaxNameLen);
iRC = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szPassword,
(int)strlen(szPassword)+1, szwPassword, iMaxNameLen);

// Initialize COM library to be able to use
OLE-DB interfaces
CoInitialize(NULL);

// Initialization - create SQLOLEDB
component
//hr = CoCreateInstance(CLSID_SQLOLEDB, //GUID of SQLOLEDB component
//                      // Compile for SNAC
//                      hr = CoCreateInstance(CLSID_SQLNCLI, //GUID of SQLNCLI component
//                                         NULL,
//                                         // not defining an aggregate
component, so NULL
CLCTX_INPROC_SERVER, // run the component in our process
IID_IDBInitialize,
(void **) &pIDBInitialize;

/*
Initialize the property values needed
to establish the connection.
*/
for(i = 0; i < 4; i++)
    VariantInit(&m_InitProperties[i].vValue);
//Server name.
m_InitProperties[0].dwPropertyID =
DBPROP_INIT_DATASOURCE;
m_InitProperties[0].vValue.vt      = VT_BSTR;
m_InitProperties[0].vValue.bstrVal=
SysAllocString(szwServer);
m_InitProperties[0].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[0].colid        = DB_NULLID;
//Database.

```

```

m_InitProperties[1].dwPropertyID =
DBPROP_INIT_CATALOG;
m_InitProperties[1].vValue.vt      = VT_BSTR;
m_InitProperties[1].vValue.bstrVal=
SysAllocString(szwDatabase);
m_InitProperties[1].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[1].colid        = DB_NULLID;
//Username (login).
m_InitProperties[2].dwPropertyID =
DBPROP_AUTH_USERID;
m_InitProperties[2].vValue.vt      = VT_BSTR;
m_InitProperties[2].vValue.bstrVal=
SysAllocString(szwUser);
m_InitProperties[2].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[2].colid        = DB_NULLID;
//Password.
m_InitProperties[3].dwPropertyID =
DBPROP_AUTH_PASSWORD;
m_InitProperties[3].vValue.vt      = VT_BSTR;
m_InitProperties[3].vValue.bstrVal=
SysAllocString(szwPassword);
m_InitProperties[3].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[3].colid        = DB_NULLID;
/*
Construct the DBPROPSET
structure(m_rgInitPropSet). The
DBPROPSET structure is used to pass an array of
DBPROP
structures (m_InitProperties) to the
SetProperties method.
*/
m_rgInitPropSet.guidPropertySet =
DBPROPSET_DBINIT;
m_rgInitPropSet.cProperties     = 4;
m_rgInitPropSet.rgProperties   =
m_InitProperties;
//Set initialization properties.
if (FAILED(hr = pIDBInitialize-
>QueryInterface(IID_IDBProperties,
                (void **) &pIDBProperties)))
{
    ThrowError(pIDBInitialize,
COLEDBERR::eQueryInterface, "CTPCC_OLEDB()");
}

hr = pIDBProperties->SetProperties(1,
&m_rgInitPropSet);
pIDBProperties->Release();
//Now establish the connection to the data
source.
hr = pIDBInitialize->Initialize();

// Free BSTR property strings
for(i = 0; i < 4; i++)
{

```

```

SysFreeString(m_InitProperties[i].vValue.bstrVal);
}

hr = pIDBInitialize-
>QueryInterface(IID_IDBCreateSession, (void
**) &m_pIDBCreateSession);

// Releasing this has no effect on the SQL
Server connection
// of the data source object because of the
reference maintained by
// m_pIDBCreateSession.
pIDBInitialize->Release();
pIDBInitialize = NULL;

hr = m_pIDBCreateSession-
>CreateSession(NULL, IID_IDBCreateCommand, (IUnknown
**) &m_pIDBCreateCommand);
if (FAILED(hr))
{
    ThrowError(m_pIDBCreateSession,
COLEDBERR::eCreateSession, "CTPCC_OLEDB()");
}

hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**) &pICommandText);
if (FAILED(hr))
{
    ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CTPCC_OLEDB()");
}

hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"set nocount on set
XACT_ABORT ON");
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CTPCC_OLEDB()");
}

hr = pICommandText->Execute(NULL, IID_NULL,
NULL, NULL, NULL);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eExecute, "CTPCC_OLEDB()");
}

pICommandText->Release();

// verify that version of stored procs on
server is correct
CheckSPVersion();

// Get IMalloc interface
hr = CoGetMalloc(1, (LPMALLOC
*) &m_pIMalloc);

```

```

// Bind parameters for each of the
transactions
    InitNewOrderParams();
    InitPaymentParams();
    InitOrderStatusParams();
    InitDeliveryParams();
    InitStockLevelParams();
}

CTPCC_OLEDB::~CTPCC_OLEDB( void )
{
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc->Release();
    }
    m_pIPaymentCommand->Release();
    m_pIDBCreateCommand->Release();
    m_pIDBCreateSession->Release();

    CoUninitialize(); // uninitialized COM
library
}

/*
 *      Check stored procedures version on the
server.
*/
void CTPCC_OLEDB::CheckSPVersion()
{
    HRESULT hr;
    char db_sp_version[10];
    ICommandText* piCommandText;
    IAccessor* piAccessor;
    IRowset* pRowset;
    const ULONG nOutputParams = 1;
    // output 1st result set columns
    HACCESSOR hTpccVersionOutputAccessor;
    // Structure to bind in accessor
    DBBINDING acOutputDBBindBinding[nOutputParams];
    DBBINDSTATUS acOutputDBBindStatus[nOutputParams];
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG cRowsObtained;
    HROW rghRow;
    //returned row handles
    HROW* prghRow =
&rghRow;

    hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown **)&piCommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CheckSPVersion()");
    }

    hr = piCommandText-
>SetCommandText(DBGUID_SQL, L"call tpcc_version");
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eSetCommandText, "CheckSPVersion()");
    }

    hr = piCommandText-
>QueryInterface(IID_IAccessor, (void **)&piAccessor);
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eQueryInterface, "CheckSPVersion()");
    }

    // Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBindBinding[0],
nOutputParams, eOutputColumn);

    // Binding for a rowset
    SetBinding(&acOutputDBBindBinding[0], 0,
sizeof(db_sp_version), DBTYPE_STR);

    hr = piAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA,
        nOutputParams,
        acOutputDBBindBinding,
        sizeof(db_sp_version),
        &hTpccVersionOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "CheckSPVersion()");
    }

    hr = piCommandText->Execute(NULL,
        IID_IRowset, NULL, NULL, (IUnknown **)&pRowset);
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eExecute, "CheckSPVersion()");
    }

    // Fetch the result row handle(s)
    hr = pRowset->GetNextRows(DB_NULL_HCHAPTER,
        0, cRows, &cRowsObtained, &prghRow);
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eGetNextRows, "CheckSPVersion()");
    }

    // Fetch the actual row data by handle
    hr = pRowset->GetData(rghRow,
        hTpccVersionOutputAccessor, &db_sp_version);
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eGetData, "CheckSPVersion()");
    }

    // Release row(s)
    hr = pRowset->Release();
    piCommandText->Release();

    // Check the retrieved version
    if (strcmp(db_sp_version,sVersion))
        throw new
CTPCC_OLEDB_ERR(
CTPCC_OLEDB_ERR::ERR_WRONG_SP_VERSION );
}

void CTPCC_OLEDB::ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation)
{
    HRESULT hr;
    //char szState[6];
    char szMsg[SQL_MAX_MESSAGE_LENGTH];
    char szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    COLEDBERR
    *pOLEDBErr; // not allocated until needed (maybe never)
    int iLen;
    // Interfaces
    IErrorInfo* pIErrorInfoAll
    = NULL;
    IErrorInfo* pIErrorInfoRecord
    = NULL;
    IErrorRecords* pIErrorRecords
    = NULL;
    ISupportErrorInfo* pISupportErrorInfo
    = NULL;
    ISQLServerErrorHandler*
pISQLServerErrorHandler = NULL;
    ISQLServerErrorInfo* pISQLServerErrorInfo
    = NULL;
    // Information used when cannot get custom
error object
    ERRORINFO
    BasicErrorInfo;
    BSTR
    bstrDescription;
    // Number of error records.
    ULONG nRecs;
    ULONG nRec;
    // SQL Server error information from
    ISQLServerErrorHandler.
    SSERRORINFO* pSSSErrorInfo =
NULL;
    OLECHAR* pSSSErrorStrings =
NULL;
    assert(pObjectWithError != NULL);
}

```

```

pOLEDBErr = new COLEDBERR(szLocation);

pOLEDBErr->m_NativeError = 0;
pOLEDBErr->m_eAction = eAction;
pOLEDBErr->m_bDeadLock = FALSE;

szTmp[0] = 0;

// Only ask for error information if the
interface supports it.
// Note: SQLOLEDB provider supports error
interface, so this check is
// for good style only.
hr = pObjectWithError-
>QueryInterface(IID_ISupportErrorInfo, (void**)&pISupportErrorInfo);
if (FAILED(hr))
{
    _snprintf(szMsg, sizeof(szMsg),
"SupportErrorInfo interface not supported (hr=0x%X)",
hr);
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
    throw pOLEDBErr;
}
/*if (FAILED(pISupportErrorInfo-
>InterfaceSupportsErrorInfo(IID_InterfaceWithError)))
{
    _snprintf(szMsg, sizeof(szMsg),
"InterfaceWithError interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
    return;
}*/
// Do not test the return of GetErrorInfo.
It can succeed and return
// a NULL pointer in pIErrInfoAll. Simply
test the pointer.
GetErrorInfo(0, &pIErrInfoAll);

if (pIErrInfoAll != NULL)
{
    // Test to see if it's a valid
OLE DB IErrorInfo interface
    // exposing a list of records.
    if (SUCCEEDED(pIErrInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)&pIErrRecords)))
    {
        pIErrRecords-
>GetRecordCount(&nRecs);

        // Within each record,
retrieve information from each
        // of the defined
interfaces.

```

```

for (nRec = 0; nRec <
nRecs; nRec++)
{
    // Request
the generic SQL error interface.

pIErrRecords->GetCustomErrorObject(nRec,
IID_ISQLErrorInfo, // generic SQL error
interface
(IUnknown**) &pISQLErrorInfo);

if
(pISQLErrorInfo != NULL)
{
    // Request SQL Server-specific error interface, not the
generic SQL error interface.

pISQLErrorInfo->QueryInterface(
IID_ISQLServerErrorInfo, // SQL Server
error interface

(void**) &pISQLServerErrorInfo);
}

// Test to
ensure the reference is valid, then
// get error
information from ISQLServerErrorInfo.
if
(pISQLServerErrorInfo != NULL)
{
    pISQLServerErrorInfo-
>GetErrorInfo(&pSSErrorInfo, &pSSErrorStrings);
}

// ISQLServerErrorInfo::GetErrorInfo succeeds
// even when it has nothing to return. Test the
// pointers before using.
if
(pSSErrorInfo)
{
    // First, add the error message.

    // Convert Unicode error string to ANSI.
WideCharToMultiByte(CP_THREAD_ACP, 0,
pSSErrorInfo->pwszMessage, -1,
szMsg, sizeof(szMsg),
NULL, NULL);

    // Check if have space to add the
line number.
    // Assume the line number takes
no more than 3 digits.

    if ((strlen(szMsg) + 4) <
sizeof(szMsg))
    {

```

```

        _snprintf(&szMsg[strlen(szMsg)],
sizeof(szMsg),
                ":%d",
pSErrorInfo->wLineNumber);
}

        // quit if there isn't enough
room to concatenate error text

        if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
break;

        // concatenate the error record
to the overall error message

        strcat( szTmp, szMsg );

        // copy the overall error string
to the exception

        POLEDBErr->m_OLEDBErrStr = new
char[strlen(szTmp)+1];
strcpy(pOLEDBErr->m_OLEDBErrStr,
szTmp);

}

        // Third, capture the (first) database
error

        if (pOLEDBErr->m_NativeError == 0 &&
pSErrorInfo->lNative != 0)
{
        pOLEDBErr->m_NativeError =
pSErrorInfo->lNative;

        // Check for deadlock error code
and set the deadlock flag

        if (pSErrorInfo->lNative ==
1205)
{
        pOLEDBErr->m_bDeadLock
= TRUE;
}

```

```

        }

        // IMalloc::Free needed to release
references

        // on returned values.

        if (m_pIMalloc != NULL)
{
        m_pIMalloc-
>Free(pSErrorStrings);

        m_pIMalloc->Free(pSErrorInfo);
}
}

        pISQLServerErrorInfo->Release();
}
else
{
        // Custom error object is not supported.
        // Use general OLE-DB error interface.
        // Get the numeric error code
        pIErrorRecords->GetBasicErrorInfo(nRec,
&BasicErrorInfo);

        if
(pOLEDBErr->m_NativeError == 0)
{
        // Get the failed call HRESULT code, which
is not really the native error
        pOLEDBErr->m_NativeError =
BasicErrorInfo.hrError;
}
}

        Try to get the string description of the error.

        pIErrorRecords->GetErrorInfo(nRec,
LOCALE_USER_DEFAULT,
(IErrorInfo**)&pIErrorInfoRecord);

        if
(pIErrorInfoRecord)
{
        pIErrorInfoRecord-
>GetDescription(&bstrDescription);
}

```

```

        // Convert Unicode error string to ANSI.
WideCharToMultiByte(CP_THREAD_ACP, 0,
bstrDescription, -1,
szMsg, sizeof(szMsg),
NULL, NULL);

        pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
strcpy(pOLEDBErr->m_OLEDBErrStr, szMsg);

}

        } // if
(SUCCEEDED(pIErrorInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)&pIErrorRecords)))
        else
{
        // No IErrorRecords
interface supported. Use default IErrorInfo.
// Note: SQLOLEDB
supports IErrorRecords, so this check is for good
style only.
        _snprintf(szMsg,
sizeof(szMsg), "IErrorRecords interface not
supported");
        pOLEDBErr-
>m_OLEDBErrStr = new char[strlen(szMsg)+1];
strcpy(pOLEDBErr-
>m_OLEDBErrStr, szMsg);
}

        pIErrorInfoAll->Release();
}
else // if (pIErrorInfoAll != NULL)
{
        // No IErrorInfo interface
supported.
// Note: SQLOLEDB supports
IErrorInfo, so this check is for good style only.
        _snprintf(szMsg, sizeof(szMsg),
"IErrorInfo interface not supported");
        pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
}

        throw pOLEDBErr;
}
/*

```

```

*      Create a new command object from the SQL
text passed in.
*/
void CTPCC_OLEDB::CreateCommand(wchar_t*
szSQLCommand,                                // I: SQL
query for the command

    ICommandText** ppICommandText      // O: returned command object
)
{
    HRESULT hr;

    // Create a new command object
    hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown**
)ppICommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand,
"CTPCC_OLEDB::CreateCommand");
    }

    // Set command text
    hr = (*ppICommandText)->SetCommandText(DBGUID_SQL, szSQLCommand);
    if (FAILED(hr))
    {
        ThrowError(*ppICommandText,
COLEDBERR::eSetCommandText,
"CTPCC_OLEDB::CreateCommand");
    }

    // Prepare the command
    PrepareCommand(*ppICommandText);
}

/*
 *      QueryInterface and Prepare in one function
for simplicity.
 *      DEFERRED PREPARE property is set to off to
prepare immediately.
*/
void CTPCC_OLEDB::PrepareCommand(ICommandText*
pICommandText)
{
    HRESULT hr;
    ICommandPrepare* pICommandPrepare;
    ICommandProperties* pICommandProperties;
    DBPROPSET
    rowSetPropSet;
    DBPROP
    rowSetProp;

    // Set the deferred prepare property to
false.
    rowSetProp.dwPropertyID =
SSPROP_DEFERPREPARE;
    memset(&rowSetProp.vValue, 0,
sizeof(rowSetProp.vValue));
}

```

```

rowSetProp.dwOptions =
DBPROPOPTIONS_REQUIRED;
rowSetProp.colid = DB_NULLID;

rowSetPropSet.cProperties = 1;
rowSetPropSet.guidPropertySet =
DBPROPSET_SQLSERVERROWSET;
rowSetPropSet.rgProperties = &rowSetProp;

// Query interface for setting properties
hr = pICommandText->QueryInterface(IID_ICommandProperties, (void
**)&pICommandProperties);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Set the property set
hr = pICommandProperties->SetProperties(1,
&rowSetPropSet);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Get interface for preparing commands
hr = pICommandText->QueryInterface(IID_ICommandPrepare, (void
**)&pICommandPrepare);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Prepare Payment command
hr = pICommandPrepare->Prepare(0xFFFFFFFF);
if (FAILED(hr))
{
    ThrowError(pICommandPrepare,
COLEDBERR::ePrepare, "CTPCC_OLEDB::PrepareCommand");
}

/*
 *      Initialize fields of an array of bindings
structures.
 *      Needs to be called before setting
individual parameter/column bindings.
*/
void CTPCC_OLEDB::InitBindings(DBBINDING*
pDBBindings,                                // IO: array of bindings
int iCount,                                     // I: number of
elements in the array

```

```

eBindingType BindingType)      // I: what the bindings will be used for
(parameters/columns)
{
    int i;

    for(i = 0; i < iCount; i++)
    {
        pDBBindings[i].iOrdinal = i + 1;
        pDBBindings[i].obLength = 0;
        pDBBindings[i].obStatus = 0;
        pDBBindings[i].pTypeInfo = NULL;
        pDBBindings[i].pObject = NULL;
        pDBBindings[i].pBindExt = NULL;
        pDBBindings[i].dwPart = DBPART_VALUE;

        switch (BindingType)
        {
            case eInputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT;
                break;
            case eOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_OUTPUT;
                break;
            case eInputOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT | DBPARAMIO_OUTPUT;
                break;
            case eOutputColumn:
                pDBBindings[i].eParamIO
= DBPARAMIO_NOTPARAM;
                break;
            default:
                assert(false);      //
this should never happen
        }

        pDBBindings[i].dwMemOwner =
DBMEMOWNER_CLIENTOWNED;
        pDBBindings[i].dwFlags = 0;
        pDBBindings[i].bPrecision = 0;
        pDBBindings[i].bScale = 0;
    }

    /*
     *      Perform binding for one parameter or output
column.
 */
    /*
 */
void CTPCC_OLEDB::SetBinding(DBBINDING* pDBBinding,
// I: binding row structure
size_t obValue,
// I: parameter (column) offset in the user
buffer
size_t cbMaxLen,
// I: parameter (column) length

```

```

        DBTYPE wType
    // I: parameter (column) type
    )

{
    pDBBinding->obValue = (ULONG) obValue;
    pDBBinding->cbMaxLen = (ULONG) cbMaxLen;
    pDBBinding->wType = wType;
}

void CTPCC_OLEDB::InitStockLevelParams()
{
    int
        i;
    HRESULT
    hr;
    wchar_t
    szName[iMAX_SP_NAME_LEN];
    IAccessor*
    pIAccessor;
    const ULONG
    nInputParams = 3; // input parameters
    const ULONG
    nOutputParams = 1; // output 1st result
    set columns
        // Structure to bind in accessor
        DBBINDING
        acInputDBBinding[nInputParams];
        DBBINDSTATUS
        acInputDBBindStatus[nInputParams];
        DBBINDING
        acOutputDBBinding[nOutputParams];
        DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];

        // Set command text
        _snwprintf(szName,
        sizeof(szName)/sizeof(szName[0]),
        L"%{call
%stpcc_stocklevel (?, ?, ?)}", m_szSPPrefix);

        // Create and Prepare a new command object
        for StockLevel.
            CreateCommand(szName,
            &m_pIStockLevelCommand);

        // Describe the consumer buffer by filling
        in the array
            // of DBBINDING structures. Each binding
            associates
                // a single parameter to the consumer's buffer.
                InitBindings(&acInputDBBinding[0],
                nInputParams, eInputParameter);

                i = 0;
                // StockLevel parameter 1
                SetBinding(&acInputDBBinding[i++],
                offsetof(STOCK_LEVEL_DATA, w_id),
                sizeof(m_txn.StockLevel.w_id), DBTYPE_I4);

                // StockLevel parameter 2

```

```

        SetBinding(&acInputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, d_id),
        sizeof(m_txn.StockLevel.d_id), DBTYPE_UI1);

        // StockLevel parameter 3
        SetBinding(&acInputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, threshold),
        sizeof(m_txn.StockLevel.threshold), DBTYPE_I2);

        hr = m_pIStockLevelCommand-
        >QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
            COLEDBERR::eQueryInterface,
            "InitStockLevelParams()");
        }

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_PARAMETERDATA,
            nInputParams,
            acInputDBBinding,
            sizeof(STOCK_LEVEL_DATA),
            &m_hStockLevelInputAccessor,
            acInputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor,
            "InitStockLevelParams()");
        }

        m_StockLevelExecuteParams.cParamSets = 1;
        m_StockLevelExecuteParams.hAccessor =
        m_hStockLevelInputAccessor;
        m_StockLevelExecuteParams.pData =
        &m_txn.StockLevel;

        // Now fill the binding information for
        result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
        nOutputParams, eOutputColumn);

        // Binding for a rowset that may return
        more than one row.
        i = 0;
        // StockLevel output column 1
        SetBinding(&acOutputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, low_stock),
        sizeof(m_txn.StockLevel.low_stock), DBTYPE_I4);

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_ROWDATA |
            DBACCESSOR_OPTIMIZED,
            nOutputParams,
            acOutputDBBinding,
            sizeof(STOCK_LEVEL_DATA),
            &m_hStockLevelOutputAccessor,
            acOutputDBBindStatus);
        if (FAILED(hr))
        {

```

```

            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor,
            "InitStockLevelParams()");
        }

void CTPCC_OLEDB::StockLevel()
{
    HRESULT
    int
    iTryCount = 0;
    IRowset*
    pRowset;
    LONG
    cRows = 1;
    // number of rows returned in the rowset
    ULONG
    cRowsObtained;
    HROW
    rghRow;
    HROW*
    prghRow =
    &rgRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
            command
            hr =
            m_pIStockLevelCommand->Execute(NULL, IID_IRowset,
            &m_StockLevelExecuteParams, NULL,
            (IUnknown **)&pRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
                COLEDBERR::eExecute, "StockLevel()");
            }
        }
        // Fetch the result row
        handle(s)
        hr = pRowset-
        >GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
        &cRowsObtained, &prghRow);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
            COLEDBERR::eGetNextRows, "StockLevel()");
        }
        // Fetch the actual row
        data by handle
        hr = pRowset-
        >GetData(rgRow, m_hStockLevelOutputAccessor,
        &m_txn.StockLevel);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
            COLEDBERR::eGetData, "StockLevel()");
        }
    }
}

```

```

        // Release row(s)
        hr = pRowset->ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
        NULL);
        // Release rowset
        hr = pRowset->Release();

        m_txn.StockLevel.exec_status_code = eOK;

        break;
    } catch (COLEDBERR *e)
    {
        if ((!e->m_bDeadLock) || (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    if (iTryCount)
//        throw new CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitNewOrderParams()
{
    int i, j, iOlCount;
    HRESULT hr;
    wchar_t szName[iMAX_SP_NAME_LEN];
    IAccessor* pIAccessor;
    const ULONG nInputParams = 5 +
3*MAX_OL_NEW_ORDER_ITEMS; // input parameters
    const ULONG nOutputParams = 5; // output 1st result
    set columns
    const ULONG nOutputParams2 = 8; // output 2nd result
    set columns
    // Structure to bind in accessor
    DBBINDING acInputDBBinding[nInputParams];
    DBBINDSTATUS acInputDBBindStatus[nInputParams];
    DBBINDING acOutputDBBinding[nOutputParams];
    DBBINDSTATUS acOutputDBBindStatus[nOutputParams];
    DBBINDING acOutputDBBinding2[nOutputParams2];
}

```

```

        DBBINDSTATUS acOutputDBBindStatus2[nOutputParams2];

        // Describe the consumer buffer by filling
        in the array
        // of DBBINDING structures. Each binding
        associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
        nInputParams, eInputParameter);

        i = 0;
        // NewOrder parameter 1
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, w_id),
        sizeof(m_txn.NewOrder.w_id), DBTYPE_I4);

        // NewOrder parameter 2
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, d_id),
        sizeof(m_txn.NewOrder.d_id), DBTYPE_UI1);

        // NewOrder parameter 3
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, c_id),
        sizeof(m_txn.NewOrder.c_id), DBTYPE_I4);

        // NewOrder parameter 4
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, o.ol_cnt),
        sizeof(m_txn.NewOrder.o.ol_cnt), DBTYPE_UI1);

        // NewOrder parameter 5
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, o.all_local),
        sizeof(m_txn.NewOrder.o.all_local), DBTYPE_UI1);

        for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
        {

            SetBinding(&acInputDBBinding[i++],
            offsetof(NEW_ORDER_DATA, OL[j].ol_i_id),
            sizeof(m_txn.NewOrder.OL[j].ol_i_id), DBTYPE_I4);

            SetBinding(&acInputDBBinding[i++],
            offsetof(NEW_ORDER_DATA, OL[j].ol_supply_w_id),
            sizeof(m_txn.NewOrder.OL[j].ol_supply_w_id),
            DBTYPE_I4);

            SetBinding(&acInputDBBinding[i++],
            offsetof(NEW_ORDER_DATA, OL[j].ol_quantity),
            sizeof(m_txn.NewOrder.OL[j].ol_quantity), DBTYPE_I2);

        }

        // Now fill the binding information for
        result set 1 output columns
        InitBindings(acOutputDBBinding[0],
        nOutputParams, eOutputColumn);

        // Binding for the order line rowsets (each
        consist of one row).

```

```

        // Bind to offsets of the OL_NEW_ORDER_DATA
        structure instead of NEW_ORDER_DATA.
        // IRowset::GetData() will be passed
        individual array slots OL[i] to fetch the data
        // from the row set.

        i = 0;
        // NewOrder output column 1
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_i_name),
        sizeof(m_txn.NewOrder.OL[0].ol_i_name), DBTYPE_STR);

        // NewOrder output column 2
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_stock),
        sizeof(m_txn.NewOrder.OL[0].ol_stock), DBTYPE_I2);

        // NewOrder output column 3
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_brand_generic),
        sizeof(m_txn.NewOrder.OL[0].ol_brand_generic),
        DBTYPE_STR);

        // NewOrder output column 4
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_i_price),
        sizeof(m_txn.NewOrder.OL[0].ol_i_price), DBTYPE_R8);

        // NewOrder output column 5
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_amount),
        sizeof(m_txn.NewOrder.OL[0].ol_amount), DBTYPE_R8);

        // Now fill the binding information for
        result set 2 output columns
        InitBindings(acOutputDBBinding2[0],
        nOutputParams2, eOutputColumn);

        i = 0;
        // NewOrder output column 1
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, w_tax),
        sizeof(m_txn.NewOrder.w_tax), DBTYPE_R8);

        // NewOrder output column 2
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, d_tax),
        sizeof(m_txn.NewOrder.d_tax), DBTYPE_R8);

        // NewOrder output column 3
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, o_id),
        sizeof(m_txn.NewOrder.o_id), DBTYPE_I4);

        // NewOrder output column 4
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, c_last),
        sizeof(m_txn.NewOrder.c_last), DBTYPE_STR);

        // NewOrder output column 5

```

```

        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, c_discount),
        sizeof(m_txn.NewOrder.c_discount), DBTYPE_R8);

        // NewOrder output column 6
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, c_credit),
        sizeof(m_txn.NewOrder.c_credit), DBTYPE_STR);

        // NewOrder output column 7
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, o_entry_d),
        sizeof(m_txn.NewOrder.o_entry_d),
        DBTYPE_DBTIMESTAMP);

        // NewOrder output column 8
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, o_commit_flag),
        sizeof(m_txn.NewOrder.o_commit_flag), DBTYPE_I2);

        for (j=0; j<MAX_OI_NEW_ORDER_ITEMS; j++)
        {
            // Set command text first
            // Print the fixed first portion
            of parameters
            i = _snprintf(szName,
            sizeof(szName)/sizeof(szName[0]),
            L"(call %stpcC_neworder (?, ?, ?, ?, ?, ?",
            m_szSPPrefix);

            // Now print the variable portion
            depending on the number of order line parameters
            for (iOLCount = 0; iOLCount <= j;
            ++iOLCount)
            {
                i +=

                _snprintf(&szName[i],
                sizeof(szName)/sizeof(szName[0]) - i, L", ?, ?, ?");

                }

                // Print the fixed end
                if (j != MAX_OI_NEW_ORDER_ITEMS -
                1)
                    { // append 'default' for
                    the parameters that are not used
                    i +=

                    _snprintf(&szName[i],
                    sizeof(szName)/sizeof(szName[0]) - i, L", default)");
                    }

                    else // using all 15 order
                    line parameters
                    {
                        i +=
                        _snprintf(&szName[i],
                        sizeof(szName)/sizeof(szName[0]) - i, L")");
                    }

                    // Create and Prepare a new
                    command object for NewOrder.
    
```

```

        CreateCommand(szName,
        &m_pINewOrderCommand[j]);

        // Now create the input accessor
        for this prepared command
        hr = m_pINewOrderCommand[j]-
        >QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {

            ThrowError(m_pINewOrderCommand[j],
            COLEDBERR::eQueryInterface, "InitNewOrderParams()");
        }

        hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        5 +
        3 * (j + 1),
        acInputDBBinding,
        sizeof(NEW_ORDER_DATA),
        &m_hNewOrderInputAccessor[j],
        acInputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        m_NewOrderExecuteParams[j].cParamSets = 1;
        // m_NewOrderExecuteParams.hAccessor is set dynamically
        at run-time
        // based on the number of new
        order items for the particular transaction call.

        m_NewOrderExecuteParams[j].hAccessor =
        m_hNewOrderInputAccessor[j];
        m_NewOrderExecuteParams[j].pData
        = &m_txn.NewOrder;
        // Create accessor for the first
        rowset
        hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(OL_NEW_ORDER_DATA),
    
```

```

        &m_hNewOrderOutputAccessor[j],
        acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        // Create accessor for the second
        rowset
        hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA,
        // cannot be optimized too because #1 accessor is
        nOutputParams2,
        acOutputDBBinding2,
        sizeof(NEW_ORDER_DATA),
        &m_hNewOrderOutputAccessor2[j],
        acOutputDBBindStatus2);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        pIAccessor->Release();
    }

void CTPCC_OLEDB::NewOrder()
{
    HRESULT hr;
    int iTryCount = 0;
    IMultipleResults* pMultipleResults;
    IRowset* pRowset;
    IRowset* pRowset2;
    LONG cRows = 1; // number of rows
    returned in the 1st rowset
    ULONG cRowsObtained;
    HROW rghRows; //returned row handles
    for the 1st result set
    HROW* prghRows = &rghRows;
    LONG cRows2 = 1; // number of rows
    returned in the 2nd rowset
    ULONG cRowsObtained2;
    HROW rghRows2; //returned row handle
    for the 2nd result set
    HROW* prghRows2 = &rghRows2;
    int i;
    long lRowsAffected; // the number of
    affected rows for a rowset
}

```

```

int
iHandleIndex; // index into the
handle arrays based on the orders count

// check whether any order lines are for a
remote warehouse
m_txn.NewOrder.o_all_local = 1;
for (i = 0; i < m_txn.NewOrder.o.ol_cnt;
i++)
{
    if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
    {

        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
            break;
    }
}

iHandleIndex = m_txn.NewOrder.o.ol_cnt - 1;
// for convenience

while (TRUE)
{
    try
    {
        // Execute the prepared
command (according to the number of new orders)
        // Ask for
IMultipleResults because it returns 2 rowsets.
        hr =
m_pINewOrderCommand[iHandleIndex] ->Execute(
NULL, IID_IMultipleResults,
&m_NewOrderExecuteParams[iHandleIndex],
NULL,
(IUnknown **) &pMultipleResults);
        if (FAILED(hr))
    }

    ThrowError(m_pINewOrderCommand[iHandleIndex],
COLEDBERR::eExecute, "NewOrder()");
}
}

////////////////// // Get order line
results

/////////////////
m_txn.NewOrder.total_amount = 0;
for (i = 0; i <
m_txn.NewOrder.o.ol_cnt; ++i)

```

```

{
    // Get the
first rowset object
    hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **) &pRowset);
    if
(FAILED(hr))
    {

        char szTmp[256];

        _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=0x%X", i, hr);

        ThrowError(m_pINewOrderCommand[m_txn.NewOrd
er.o.ol_cnt - 1], COLEDBERR::eGetResult, szTmp);
    }

    // Fetch the
result row handle(s)
    hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
    if
(FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
    }

    // Fetch the
actual row data by handle
    hr = pRowset-
>GetData(rghRows,
m_hNewOrderOutputAccessor[iHandleIndex],
&m_txn.NewOrder.OL[i]);
    if
(FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
    }

    m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;

    // Release
row(s)
    hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
    // Release
rowset
    hr = pRowset-
>Release();
}

```

```

//////////////////////////// // Get the second
rowset object
////////////////////////////
hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **) &pRowset2);
    if (FAILED(hr))
    {
        char
szTmp[256];

        _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=%d", i, hr);

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetResult, szTmp);
    }

    // Fetch the result row
handle(s)
    hr = pRowset2-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
    if (FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
    }

    // Fetch the actual row
data by handle
    hr = pRowset2-
>GetData(rghRows2,
m_hNewOrderOutputAccessor2[iHandleIndex],
&m_txn.NewOrder);
    if (FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
    }

    // Release row(s)
    hr = pRowset2-
>ReleaseRows(cRowsObtained2, prghRows2, NULL, NULL,
NULL);
    // Release rowset
    hr = pRowset2-
>Release();
    // Release the common
MultipleResults interface
    hr = pMultipleResults-
>Release();
    if
(m_txn.NewOrder.o.all_local == 1)

```

```

    {
        m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

        m_txn.NewOrder.exec_status_code = eOK;
    }
    else
    {
        m_txn.NewOrder.exec_status_code =
eInvalidItem;
    }
    break;
}

catch (COLEDBERR *e)
{
    if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
        throw;

    // hit deadlock;
    backoff for increasingly longer period
    delete e;
    Sleep(10 * iTryCount);
}

//      if (iTryCount)
//          throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitPaymentParams()
{
    int
        i;
    HRESULT
        hr;
    wchar_t
        szName[iMAX_SP_NAME_LEN];
    IAccessor*
        pIAccessor;
    const
        ULONG
        nInputParams = 7; // input parameters
    const
        ULONG
        nOutputParams = 27; // output result set
    columns
        // Structure to bind in accessor
        DBBINDING
        acInputDBBinding[nInputParams];
        DBBINDSTATUS
        acInputDBBindStatus[nInputParams];
        DBBINDING
        acOutputDBBinding[nOutputParams];
        DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];
    }

    // Set command text
}

```

```

        _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]), L"{call
%stpcc_payment(?, ?, ?, ?, ?, ?)}", m_szSPPrefix);

        // Create and Prepare a new command object
        for Payment.
            CreateCommand(szName, &m_pIPaymentCommand);

        // Describe the consumer buffer by filling
        in the array
        // of DBBINDING structures. Each binding
        associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

        i = 0;
        // Payment parameter 1
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, w_id),
sizeof(m_txn.Payment.w_id), DBTYPE_I4);

        // Payment parameter 2
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_w_id),
sizeof(m_txn.Payment.c_w_id), DBTYPE_I4);

        // Payment parameter 3
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, h_amount),
sizeof(m_txn.Payment.h_amount), DBTYPE_R8);

        // Payment parameter 4
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, d_id),
sizeof(m_txn.Payment.d_id), DBTYPE_UI1);

        // Payment parameter 5
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_d_id),
sizeof(m_txn.Payment.c_d_id), DBTYPE_UI1);

        // Payment parameter 6
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment parameter 7
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        hr = m_pIPaymentCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIPaymentCommand,
COLEDBERR::eQueryInterface, "InitPaymentParams()");
        }

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_PARAMETERDATA,

```

```

nInputParams,
acInputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentInputAccessor,
acInputDBBindStatus);

if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
}

m_PaymentExecuteParams.cParamSets = 1;
m_PaymentExecuteParams.hAccessor =
m_hPaymentInputAccessor;
m_PaymentExecuteParams.pData =
&m_txm.Payment;

// Now fill the binding information for
output columns
    InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

i = 0;
// Payment output column 1
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

// Payment output column 2
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

// Payment output column 3
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, h_date),
sizeof(m_txn.Payment.h_date), DBTYPE_DBTIMESTAMP);

// Payment output column 4
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_1),
sizeof(m_txn.Payment.w_street_1), DBTYPE_STR);

// Payment output column 5
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_2),
sizeof(m_txn.Payment.w_street_2), DBTYPE_STR);

// Payment output column 6
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_city),
sizeof(m_txn.Payment.w_city), DBTYPE_STR);

// Payment output column 7
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_state),
sizeof(m_txn.Payment.w_state), DBTYPE_STR);

// Payment output column 8
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_zip),
sizeof(m_txn.Payment.w_zip), DBTYPE_STR);

```

```

// Payment output column 9
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

// Payment output column 10
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 11
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 12
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 13
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 14
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_first),
sizeof(m_txn.Payment.c_first), DBTYPE_STR);

// Payment output column 15
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_middle),
sizeof(m_txn.Payment.c_middle), DBTYPE_STR);

// Payment output column 16
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

// Payment output column 17
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 18
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 19
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 20
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 21

```

```

SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_phone),
sizeof(m_txn.Payment.c_phone), DBTYPE_STR);

// Payment output column 22
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_since),
sizeof(m_txn.Payment.c_since), DBTYPE_DBTIMESTAMP);

// Payment output column 23
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit),
sizeof(m_txn.Payment.c_credit), DBTYPE_STR);

// Payment output column 24
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit_lim),
sizeof(m_txn.Payment.c_credit_lim), DBTYPE_R8);

// Payment output column 25
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_discount),
sizeof(m_txn.Payment.c_discount), DBTYPE_R8);

// Payment output column 26
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_balance),
sizeof(m_txn.Payment.c_balance), DBTYPE_R8);

// Payment output column 27
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_data),
sizeof(m_txn.Payment.c_data), DBTYPE_STR);

hr = pIAccessor->CreateAccessor(
DBACCESSOR_OPTIMIZED,
nOutputParams,
acOutputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentOutputAccessor,
acOutputDBBindStatus);

if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
}

void CTPCC_OLEDB::Payment()
{
    HRESULT hr;
    int iTryCount = 0;
    IRowset* pRowset;
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG cRowsObtained;
    HROW rghRow;
    //returned row handles
}

```

```

HROW* prghRow =
&rghRow;

if (m_txn.Payment.c_id != 0)
    m_txn.Payment.c_last[0] = 0;

while (TRUE)
{
    try
    {
        // Execute the prepared command
        hr =
m_pIPaymentCommand->Execute(NULL, IID_IRowset,
&m_PaymentExecuteParams, NULL,
(IUnknown **)&pRowset);
        if (FAILED(hr))
        {

            ThrowError(m_pIPaymentCommand,
COLEDBERR::eExecute, "Payment()");
        }
    }
    // Fetch the result row handle(s)
    hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
    if (FAILED(hr))
    {

        ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetNextRows, "Payment()");
    }
    // Fetch the actual row data by handle
    hr = pRowset-
>GetData(rghRow, m_hPaymentOutputAccessor,
&m_txn.Payment);
    if (FAILED(hr))
    {

        ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetData, "Payment()");
    }
}

// Release row(s)
// Release rowset
hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
hr = pRowset-
>Release();
if (m_txn.Payment.c_id
== 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else

```

```

    m_txn.Payment.exec_status_code = eOK;

        break;
    }
    catch (COLEDBERR *e)
    {
        if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

//     if (iTryCount)
//         throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitOrderStatusParams()
{
    int             i;
    HRESULT          hr;
    wchar_t          szName[iMAX_SP_NAME_LEN];
    IAccessor*       pIAccessor;
    const ULONG      nInputParams = 4;    // input parameters
    const ULONG      nOutputParams = 5;   // output 1st result
set columns
    const ULONG      nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING      acInputDBBinding[nInputParams];
    DBBINDSTATUS    acInputDBBindStatus[nInputParams];
    DBBINDING      acOutputDBBinding[nOutputParams];
    DBBINDSTATUS    acOutputDBBindStatus[nOutputParams];
    DBBINDING      acOutputDBBind2[nOutputParams2];
    DBBINDSTATUS    acOutputDBBindStatus2[nOutputParams2];

    // Set command text
    _snprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"%{call
%stpcc_orderstatus (?, ?, ?, ?)}", m_szSPPrefix);
}

```

```

        // Create and Prepare a new command object
for OrderStatus.
    CreateCommand(szName,
&m_pIOOrderStatusCommand);

        // Describe the consumer buffer by filling
in the array
        // of DBBINDING structures.  Each binding
associates
        // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

    i = 0;
    // OrderStatus parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, w_id),
sizeof(m_txn.OrderStatus.w_id), DBTYPE_I4);

    // OrderStatus parameter 2
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, d_id),
sizeof(m_txn.OrderStatus.d_id), DBTYPE_UI1);

    // OrderStatus parameter 3
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

    // OrderStatus parameter 4
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

    hr = m_pIOOrderStatusCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
    if (FAILED(hr))
    {

        ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eQueryInterface,
"InitOrderStatusParams()");
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        nInputParams,
        acInputDBBinding,
        sizeof(ORDER_STATUS_DATA),
        &m_hOrderStatusInputAccessor,
        acInputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
    }

    m_OrderStatusExecuteParams.cParamSets = 1;
    m_OrderStatusExecuteParams.hAccessor =
m_hOrderStatusInputAccessor;
}

```

```

    m_OrderStatusExecuteParams.pData =
&m_txn.OrderStatus;

        // Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBind[0],
nOutputParams, eOutputColumn);

        // Binding for a rowset that may return
more than one row.
        // Bind to offsets of the
OL_ORDER_STATUS_DATA structure instead of
ORDER_STATUS_DATA.
        // IRowset::GetData() will be passed
individual array slots OL[i] to fetch the data
        // from the row set.

    i = 0;
    // OrderStatus output column 1
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_supply_w_id),
sizeof(m_txn.OrderStatus.OL[0].ol_supply_w_id),
DBTYPE_I4);

    // OrderStatus output column 2
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_i_id),
sizeof(m_txn.OrderStatus.OL[0].ol_i_id), DBTYPE_I4);

    // OrderStatus output column 3
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_quantity),
sizeof(m_txn.OrderStatus.OL[0].ol_quantity),
DBTYPE_I2);

    // OrderStatus output column 4
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_amount),
sizeof(m_txn.OrderStatus.OL[0].ol_amount),
DBTYPE_R8);

    // OrderStatus output column 5
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_delivery_d),
sizeof(m_txn.OrderStatus.OL[0].ol_delivery_d),
DBTYPE_DBTIMESTAMP);

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBind,
        sizeof(OL_ORDER_STATUS_DATA),
        &m_hOrderStatusOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
    }
}

```

```

        // Now fill the binding information for
result set 2 output columns
    InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

    i = 0;
    // OrderStatus output column 1
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

    // OrderStatus output column 2
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

    // OrderStatus output column 3
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_first),
sizeof(m_txn.OrderStatus.c_first), DBTYPE_STR);

    // OrderStatus output column 4
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_middle),
sizeof(m_txn.OrderStatus.c_middle), DBTYPE_STR);

    // OrderStatus output column 5
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_entry_d),
sizeof(m_txn.OrderStatus.o_entry_d),
DBTYPE_DBTIMESTAMP);

    // OrderStatus output column 7
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_carrier_id),
sizeof(m_txn.OrderStatus.o_carrier_id), DBTYPE_I2);

    // OrderStatus output column 8
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_balance),
sizeof(m_txn.OrderStatus.c_balance), DBTYPE_R8);

    // OrderStatus output column 9
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_id),
sizeof(m_txn.OrderStatus.o_id), DBTYPE_I4);

    hr = pIAccessor->CreateAccessor(
                    DBACCESSOR_ROWDATA, ///
cannot be optimized too because #1 accessor is
                    nOutputParams2,
                    acOutputDBBinding2,
                    sizeof(NEW_ORDER_DATA),
&m_hOrderStatusOutputAccessor2,
                    acOutputDBBindStatus2);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
    }
}

```

```

}

void CTPCC_OLEDB::OrderStatus()
{
    HRESULT hr;
    int iTryCount = 0;
    IMultipleResults* pMultipleResults;
    IRowset* pRowset;
    IRowset* pRowset2;
    LONG cRows = MAX_OI_ORDER_STATUS_ITEMS; // number of rows returned in the 1st rowset
    ULONG cRowsObtained;
    HROW rghRows[MAX_OI_ORDER_STATUS_ITEMS];
    //returned row handles for the 1st result set
    HROW* prghRows = &rghRows[0];
    LONG cRows2 = 1; // number of rows returned in the 2nd rowset
    ULONG cRowsObtained2;
    HROW rghRows2; //returned row handle for the 2nd result set
    HROW* prghRows2 = &rghRows2;
    int i;
    long lRowsAffected; // the number of affected rows for a rowset
    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            // Execute the prepared command
            // Ask for IMultipleResults because it returns 2 rowsets.
            hr =
m_pIOOrderStatusCommand->Execute(NULL,
IID_IMultipleResults, &m_OrderStatusExecuteParams,
NULL,
(IUnknown **)&pMultipleResults);
            if (FAILED(hr))
            {
                ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eExecute, "OrderStatus()");
            }
        }
    }
}

```

```

////////////////////////////// // Get order line results //////////////////////////////

object // Get the first rowset
object hr = pMultipleResults->GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset);
if (FAILED(hr))
{
    ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
}

// Fetch the result row handle(s)
hr = pRowset->GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
if (FAILED(hr))
{
    ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
}

m_txn.OrderStatus.o_ol_cnt = (short)cRowsObtained;
// Get the data from multiple rows in this rowset
for (i = 0; i < m_txn.OrderStatus.o_ol_cnt; ++i)
{
    // Fetch the actual row data by handle
    hr = pRowset->GetData(rghRows[i], m_hOrderStatusOutputAccessor,
&m_txn.OrderStatus.OL[i]);
    if (FAILED(hr))
    {
        ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
    }
}

// Release row(s)
hr = pRowset->ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
// Release rowset
hr = pRowset->Release();

```

```

////////////////////////////// // Get the second
rowset object

////////////////////////////// if
(m_txn.OrderStatus.o.ol_cnt > 0)
{
    hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset2);
    if
(FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
    }

                // Fetch the
result row handle(s)
                hr =
pRowset2->GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
                if
(FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
    }

                // Fetch the
actual row data by handle
                hr =
pRowset2->GetData(rghRows2,
m_hOrderStatusOutputAccessor2, &m_txn.OrderStatus);
                if
(FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
    }

                // Release
row(s)
                hr =
pRowset2->Release();
    }

                // Release the common
MultipleResults interface
                hr = pMultipleResults-
>Release();

                if
(m_txn.OrderStatus.o.ol_cnt == 0)
                    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_NO_SUCH_ORDER
);

```

```

else if
m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else

    m_txn.OrderStatus.exec_status_code = eOK;
    break;

}
catch (COLEDBERR *e)
{
    if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
        throw;
    // hit deadlock;
backoff for increasingly longer period
    delete e;
    Sleep(10 * iTryCount);
}

// if (iTryCount)
//     throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitDeliveryParams()
{
    int
        i;
    HRESULT
    hr;
    wchar_t
szName[iMAX_SP_NAME_LEN];
IAccessor*
pIAccessor;
ULONG
nInputParams = 2; // input parameters
const ULONG
nOutputParams = 10; // output 1st result
set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBind[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBind[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];
    // Set command text
    _snprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"{call %stpcc_delivery
(?,?)}", m_szSPPrefix);

```

```

// Create and Prepare a new command object
for Delivery.
CreateCommand(szName,
&m_pIDeliveryCommand);

// Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
InitBindings(&acInputDBBind[0],
nInputParams, eInputParameter);

i = 0;
// Delivery parameter 1
SetBinding(&acInputDBBind[i++],
offsetof(DELIVERY_DATA, w_id),
sizeof(m_txn.Delivery.w_id), DBTYPE_I4);

// Delivery parameter 2
SetBinding(&acInputDBBind[i++],
offsetof(DELIVERY_DATA, o_carrier_id),
sizeof(m_txn.Delivery.o_carrier_id), DBTYPE_I2);

hr = m_pIDeliveryCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
if (FAILED(hr))
{
    ThrowError(m_pIDeliveryCommand,
COLEDBERR::eQueryInterface, "InitDeliveryParams()");
}

hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,
nInputParams,
acInputDBBind,
sizeof(DELIVERY_DATA),
&m_hDeliveryInputAccessor,
acInputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
}

m_DeliveryExecuteParams.cParamSets = 1;
m_DeliveryExecuteParams.hAccessor =
m_hDeliveryInputAccessor;
m_DeliveryExecuteParams.pData =
&m_txn.Delivery;

// Now fill the binding information for
result set 1 output columns
InitBindings(&acOutputDBBind[0],
nOutputParams, eOutputColumn);

// Binding for a rowset that may return
more than one row.
for (i = 0; i < 10; ++i)
{
    // Delivery output column 1
}

```

```

        SetBinding(&acOutputDBBinding[i],
        offsetof(DELIVERY_DATA, o_id[i]),
        sizeof(m_txn.Delivery.o_id[i]), DBTYPE_I4);
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(DELIVERY_DATA),
        &m_hDeliveryOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
        COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
    }

void CTPCC_OLEDB::Delivery()
{
    HRESULT hr;
    int iTryCount = 0;
    IRowset* pRowset;
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG cRowsObtained;
    HROW rghRow;
    //returned row handles
    HROW* prghRow = &rgRow;
    while (TRUE)
    {
        try
        {
            // Execute the prepared
            command
            hr =
m_pIDeliveryCommand->Execute(NULL, IID_IRowset,
&m_DeliveryExecuteParams, NULL,
(IUnknown**)&pRowset);
            if (FAILED(hr))
            {

                ThrowError(m_pIDeliveryCommand,
                COLEDBERR::eExecute, "Delivery()");
            }
            // Fetch the result row
            handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
            if (FAILED(hr))
            {

```

```

                ThrowError(m_pIDeliveryCommand,
                COLEDBERR::eGetNextRows, "Delivery()");
            }

            // Fetch the actual row
            data by handle
            hr = pRowset-
>GetData(rghRow, m_hDeliveryOutputAccessor,
&m_txn.Delivery);
            if (FAILED(hr))
            {

                ThrowError(m_pIDeliveryCommand,
                COLEDBERR::eGetData, "Delivery()");
            }

            // Release row(s)
            hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
            // Release rowset
            hr = pRowset-
>Release();

            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
        catch (COLEDBERR *e)
        {
            if (((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
        // if (iTryCount)
        //     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRY_TRANS,
iTryCount);
    }

```

tpcc_oledb.h

```

/*      FILE:          TPCC_OLEDB.H
*      Microsoft
TPC-C Kit Ver. 4.20.000
*      Microsoft, 1999-2004
*      Written by
Sergey Vasilevskiy
*          All Rights Reserved
*
*
*
```

```

*      PURPOSE: Header file for TPC-C txn class
OLE DB implementation.
*
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

#define iMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

// Type of parameter and result set column bindings.
enum eBindingType
{
    eInputParameter,
    eOutputParameter,
    eInputOutputParameter,
    eOutputColumn
};

class COLEDBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eQueryInterface,
        // error from QueryInterface
        eCreateSession,
        eCreateCommand,
        eSetCommandText,
        eExecute,
        eCreateAccessor,
        ePrepare,
        eGetNextRows,
        eGetData,
        eGetResult
    };
    COLEDBERR(LPCTSTR szLoc)
        : CBaseErr(szLoc)
    {
        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_OLEDBErrStr = NULL;
    };
    ~COLEDBERR()
    {
        if (m_OLEDBErrStr !=
NULL)
            delete []
        m_OLEDBErrStr;
    }
}
```

```

    };

    ACTION     m_eAction;
    int        m_NativeError;
    BOOL       m_bDeadLock;
    char      *m_OLEDBErrStr;

    int          ErrorType();
{return ERR_TYPE_OLEDB; }   char*  ErrorTypeStr() { return
"OLEDB"; }
    int          ErrorNum();
{return m_NativeError; }   char*  ErrorText() { return
m_OLEDBErrStr; }
    int          ErrorAction();
{ return (int)m_eAction; }

};

class CTPCC_OLEDB_ERR : public CBaseErr
{
public:
    enum TPCC_OLEDB_ERRS
    {
        ERR_WRONG_SP_VERSION =
1,           // "Wrong version of stored procs on
database server"
        ERR_INVALID_CUST,
        // "Invalid Customer id.name."
        ERR_NO SUCH_ORDER,
        // "No orders found for
customer."
        ERR_RETRYED_TRANS,
        // "Retries before transaction
succeeded."
    };

    CTPCC_OLEDB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; }

    CTPCC_OLEDB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; }

    int          m_errno;
    int          m_iTryCount;
    int          ErrorType();
{return ERR_TYPE_TPCC_OLEDB; }   char*  ErrorTypeStr() { return
"TPCC OLEDB"; }
    int          ErrorNum();
{return m_errno; }
    char*  ErrorText();
};

class DllDecl CTPCC_OLEDB : public CTPCC_BASE
{
private:

```

```

// declare variables and private
functions here...
    BOOL
    m_bDeadlock;                      // transaction was selected as deadlock victim
    int
                                m_MaxRetries;
                                // retry count on deadlock

    DBPROPSET
    m_rgInitPropSet;                  // initialization property set used to establish a
connection
    DBPROP
    m_InitProperties[4];              // individual initialization properties

    IDBCreateSession*
    m_pIDBCreateSession;              // session
(connection) interface
    IDBCreateCommand*
    m_pIDBCreateCommand;              // SQL
command creation interface

    IMalloc*
    m_pIMalloc;
    // Needed to release error strings.

    // StockLevel
    ICommandText*
    m_piStockLevelCommand;
    HACCESSOR
    m_hStockLevelInputAccessor;      // accessor
to bind input parameters
    HACCESSOR
    m_hStockLevelOutputAccessor;     // accessor
to bind output columns
    DBPARAMS
    m_StockLevelExecuteParams;       // parameter structure for Execute

    // NewOrder
    // One prepared command for each
possible number of new order line items
    ICommandText*
    m_pINewOrderCommand[MAX_OI_NEW_ORDER_ITEMS];
    // accessors to bind input
parameters
    // one for each possible number
of new order line items
    HACCESSOR
    m_hNewOrderInputAccessor[MAX_OI_NEW_ORDER_I
TEMS];
    // accessor to bind output
columns of the first rowset
    HACCESSOR
    m_hNewOrderOutputAccessor[MAX_OI_NEW_ORDER_
ITEMS];
    // accessor to bind output
columns of the second rowset

```

```

HACCESSOR
m_hNewOrderOutputAccessor2[MAX_OI_NEW_ORDER
 ITEMS];
    // parameter structure for
Execute
    DBPARAMS
    m_NewOrderExecuteParams [MAX_OI_NEW_ORDER_IT
EMS];

    // Payment
    ICommandText*
    m_piPaymentCommand;
    HACCESSOR
    m_hPaymentInputAccessor;          // accessor
to bind input parameters
    HACCESSOR
    m_hPaymentOutputAccessor;         // accessor
to bind output columns
    DBPARAMS
    m_PaymentExecuteParams;          // parameter structure for Execute

    // OrderStatus
    ICommandText*
    m_piOrderStatusCommand;
    HACCESSOR
    m_hOrderStatusInputAccessor;      // accessor
to bind input parameters
    HACCESSOR
    m_hOrderStatusOutputAccessor;     // accessor
to bind output columns
    HACCESSOR
    m_hOrderStatusOutputAccessor2;    // accessor to bind output columns
    DBPARAMS
    m_OrderStatusExecuteParams;       // parameter structure for Execute

    // Delivery
    ICommandText*
    m_piDeliveryCommand;
    HACCESSOR
    m_hDeliveryInputAccessor;         // accessor
to bind input parameters
    HACCESSOR
    m_hDeliveryOutputAccessor;        // accessor
to bind output columns
    DBPARAMS
    m_DeliveryExecuteParams;          // parameter
structure for Execute

    wchar_t
    m_szSPPrefix[32];               // stored
procedures prefix
    // new-order specific fields
    int
    m_no_commit_flag;

void ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation );

```

```

        void CheckSPVersion();

        void InitNewOrderParams();
        void InitPaymentParams();
        void InitDeliveryParams();
        void InitStockLevelParams();
        void InitOrderStatusParams();

        // Helper function to create and
        prepare a command
        void CreateCommand(wchar_t*
szSQLCommand, ICommandText** ppICommandText);
        // Helper function to prepare a
        command
        void PrepareCommand(ICommandText*
pICommand);

        // Helper function to fill one
        binding
        // Used for both input parameter
        and output column bindings
        void SetBinding(DBBINDING*
pDBBinding, size_t obValue, size_t cbMaxLen, DBTYPE
wType);

        // Helper function to initialize
        an array of bindings
        void InitBindings(DBBINDING*
pDBBindings, int iCount, eBindingType BindingType);

        union
        {
            NEW_ORDER_DATA
            Payment;
            Delivery;
            StockLevel;
            OrderStatus;
        }
        m_txn;

        public:
            CTPCC_OLEDB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase, LPCWSTR szSPPrefix);
            ~CTPCC_OLEDB(void);

            inline PNEW_ORDER_DATA
            BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
            inline PPAYMENT_DATA
            BuffAddr_Payment() { return
&m_txn.Payment; };
            inline PDELIVERY_DATA
            BuffAddr_Delivery() { return
&m_txn.Delivery; };

```

```

        inline PSTOCK_LEVEL_DATA
        BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
        inline PORDER_STATUS_DATA
        BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

        void NewOrder();
        void Payment();
        void Delivery();
        void StockLevel();
        void OrderStatus();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_OLEDB* CTPCC_OLEDB_new
    ( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase, LPCWSTR
szSPPrefix );

typedef CTPCC_OLEDB* (TYPE_CTPCC_OLEDB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCWSTR);

```

trans.h

```

/*      FILE:          TRANS.H
*      *          Microsoft
*      TPC-C Kit Ver. 4.42.000
*      *          Copyright
*      Microsoft, 2002
*      *          All Rights Reserved
*      *          Version
*      4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*      *
*      PURPOSE: Header file for TPC-C structure
templates.
*
*      Change history:
*      4.42.000 - changed w_id fields
from short to long to support >32K warehouses
*      4.20.000 - updated rev number to
match kit
*/
#pragma once

// String length constants
#define SERVER_NAME_LEN           20
#define DATABASE_NAME_LEN         20
#define USER_NAME_LEN              20
#define PASSWORD_LEN                20
#define TABLE_NAME_LEN             20
#define I_NAME_LEN                  50
#define I_DATA_LEN                  24
#define BRAND_LEN                   1
#define LAST_NAME_LEN                16
#define W_NAME_LEN                  10
#define ADDRESS_LEN                  20
#define STATE_LEN                     2

```

```

#define ZIP_LEN                      9
#define S_DIST_LEN                    24
#define S_DATA_LEN                   50
#define D_NAME_LEN                   10
#define FIRST_NAME_LEN                16
#define MIDDLE_NAME_LEN                 2
#define PHONE_LEN                     16
#define DATETIME_LEN                  30
#define CREDIT_LEN                     2
#define C_DATA_LEN                   250
#define H_DATA_LEN                   24
#define DIST_INFO_LEN                  24
#define MAX_DL_NEW_ORDER_ITEMS        15
#define MAX_DL_ORDER_STATUS_ITEMS     15
#define STATUS_LEN                     25
#define OL_DIST_INFO_LEN                24

// TIMESTAMP_STRUCT is provided by the ODBC header
file sqatypes.h, but is not available
// when compiling with dblib, so redefined here.
Note: we are using the symbol "__SQLTYPES"
// (declared in sqatypes.h) as a way to determine if
TIMESTAMP_STRUCT has been declared.
#ifndef __SQLTYPES
    typedef struct
    {
        /* SQLSMALLINT */ short
        year;                                unsigned short /* */
        SQLUSMALLINT */ month;                unsigned short /* */
        SQLUSMALLINT */ day;                  unsigned short /* */
        SQLUSMALLINT */ hour;                unsigned short /* */
        SQLUSMALLINT */ minute;               unsigned short /* */
        SQLUSMALLINT */ second;               unsigned short /* */
        SQLUInteger */ fraction;             unsigned long /* */
    } TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after
transaction completes
enum EXEC_STATUS
{
    eOK,                                     // 0
    "Transaction committed."
    eInvalidItem,                            // 1
    "Item number
is not valid."
    eDeliveryFailed,                         // 2
    "Delivery
Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    long
    ol_supply_w_id;
    long
    ol_i_id;
}

```

```

short
ol_quantity;

// output params
char
ol_i_name[I_NAME_LEN+1];
char
ol_brand_generic[BRAND_LEN+1];
double
ol_i_price;
double
ol_amount;
short
ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    long      w_id;
    short     d_id;
    long      c_id;
    short     o.ol_cnt;

    // output params
    EXEC_STATUS
    exec_status_code;
    char
    c_last[LAST_NAME_LEN+1];
    char      c_credit[CREDIT_LEN+1];
    double    c_discount;
    double    w_tax;
    double    d_tax;
    long      o_id;
    short     o_commit_flag;
    TIMESTAMP_STRUCT   o_entry_d;
    short     o_all_local;
    double    total_amount;
    OL_NEW_ORDER_DATA
    OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    long
    w_id;
    short
    d_id;
    long
    c_id;
    short
    c_d_id;
    long
    c_w_id;
    double
    h_amount;
    char
    c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS
    exec_status_code;
}

TIMESTAMP_STRUCT      h_date;
char
w_street_1[ADDRESS_LEN+1];
char
w_street_2[ADDRESS_LEN+1];
char
w_city[ADDRESS_LEN+1];
char
w_state[STATE_LEN+1];
char
w_zip[ZIP_LEN+1];
char
d_street_1[ADDRESS_LEN+1];
char
d_street_2[ADDRESS_LEN+1];
char
d_city[ADDRESS_LEN+1];
char
d_state[STATE_LEN+1];
char
d_zip[ZIP_LEN+1];
char
c_first[FIRST_NAME_LEN+1];
char
c_middle[MIDDLE_NAME_LEN+1];
char
c_last[NAME_LEN + 1];
char
c_street_1[ADDRESS_LEN+1];
char
c_street_2[ADDRESS_LEN+1];
char
c_city[ADDRESS_LEN+1];
char
c_state[STATE_LEN+1];
char
c_zip[ZIP_LEN+1];
char
c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT      c_since;
char
c_credit[CREDIT_LEN+1];
double
c_credit_lim;
double
c_discount;
double
c_balance;
char
c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long
    ol_i_id;
    long
    ol_supply_w_id;
    short
    ol_quantity;
    double
    ol_amount;
    TIMESTAMP_STRUCT   ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    // input params
    long      w_id;
    short     d_id;
    long      c_id;
    char
    c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS
    exec_status_code;
    char
    c_first[FIRST_NAME_LEN+1];
    char
    c_middle[MIDDLE_NAME_LEN+1];
    double
    c_balance;
    long      o_id;
    TIMESTAMP_STRUCT   o_entry_d;
    short     o_all_local;
    double    o_amount;
    short     o.ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    long
    short
    w_id;
    short
    o_carrier_id;

    // output params
    EXEC_STATUS
    exec_status_code;
    SYSTEMTIME           queue_time;
    long
    o_id[10];           // id's of delivered
orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery
transactions and for writing them to the delivery
server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME           queue;
    //time delivery transaction queued
    long      w_id;
    //delivery warehouse
    short     o_carrier_id;
    //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    long
    w_id;
    short
    d_id;
    short
    threshold;
} // output params

```

```

    EXEC_STATUS
    exec_status_code;
    long
    low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

txn_base.h

```

/*      FILE:          TXN_BASE.H
*      Microsoft
TPC-C Kit Ver. 4.20.000
*          Copyright
Microsoft, 1999
*              All Rights Reserved
*
*          Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Header file for TPC-C txn class
implementation.
*
* Change history:
*           4.20.000 - updated rev number to
match kit
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
    BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
    BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
    BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
    BuffAddr_OrderStatus() = 0;

    virtual void NewOrder
    () = 0;
    virtual void Payment
    () = 0;
    virtual void Delivery
    () = 0;
    virtual void StockLevel
    () = 0;
}

```

```

        virtual void OrderStatus ()  

        = 0;  

};

```

resource.h

```

{{{NO_DEPENDENCIES}}}
// Microsoft Developer
Studio generated
include file.
// Used by
tpcc_com_all.rc
//
#define IDS_PROJNAME 100
#define IDR_TPCC 101
#define IDR_NEWORDER 102
#define IDR_ORDERSTATUS 103
#define IDR_PAYMENT 104
#define IDR_STOCKLEVEL 105

// Next default values
for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 202
#define _APS_NEXT_COMMAND_VALUE 32768
#define _APS_NEXT_CONTROL_VALUE 201
#define _APS_NEXT_SYMED_VALUE 106
#endif
#endif

```

resource_.h

```

{{{NO_DEPENDENCIES}}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1 101

// Next default values for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

Appendix B: Database Design

The TPC-C database was created with the following Transact-SQL scripts:

removedb.sql

```
-- File: REMOVEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
--

USE master
GO

-- remove any existing database and backup files

EXEC sp_dbremove tpcc, dropdev
GO

EXEC sp_dropdevice 'tpccback1'
GO
EXEC sp_dropdevice 'tpccback2'
GO
EXEC sp_dropdevice 'tpccback3'
GO
EXEC sp_dropdevice 'tpccback4'
GO
```

backupdev.sql

```
-- File: BACKUPDEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
--

USE master
GO

-- create backup devices
```

```
EXEC sp_addumpdevice 'disk','tpccback1','w:\tpccback1.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback2','x:\tpccback2.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback3','y:\tpccback3.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback4','z:\tpccback4.dmp'
GO
```

version.sql

```
-- File: VERSION.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Returns version level of TPC-C stored procs
--
-- Always update the return value of this proc for
-- any interface changes or 'must have' bug fixes.
--
-- The value returned by this SP defines the
-- 'interface level', which must match between the
-- stored procs and the client code. The
-- interface level may be down rev from the
-- current kit. This indicates that the interface
-- hasn't changed since that version.
--
-- Interface Level: 4.20.000
--

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_version' )
    DROP PROCEDURE tpcc_version
GO

CREATE PROCEDURE tpcc_version
AS
DECLARE @version char(8)

BEGIN
    SELECT @version = '4.20.000'
    SELECT @version AS 'Version'
END
GO
```

createdb.sql

```
-- File: CREATEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
--
```

```

SET ANSI_NULL_DFLT_OFF ON
GO

USE master
GO

-----
-- Create temporary table for timing
-----

IF EXISTS( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
    DROP TABLE tpcc_timer
GO

CREATE TABLE tpcc_timer
    (start_date    CHAR(30),
     end_date     CHAR(30))
GO

INSERT INTO tpcc_timer VALUES(0,0)
GO

-----
-- Store starting time
-----
UPDATE tpcc_timer
SET start_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))
GO

-----
-- create main database files
-----
CREATE DATABASE tpcc
ON PRIMARY
(
    NAME          = MSSQL_tpcc_root,
    FILENAME     = 'c:\MSSQL_tpcc_root.mdf',
    SIZE          = 8MB,
    FILEGROWTH   = 0),
FILEGROUP MSSQL_cs_fg
(
    NAME          = MSSQL_cs1,
    FILENAME     = 'c:\cs\cs1\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs2,
    FILENAME     = 'c:\cs\cs2\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs3,
    FILENAME     = 'c:\cs\cs3\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs4,
    FILENAME     = 'c:\cs\cs4\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs5,
    FILENAME     = 'c:\cs\cs5\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs6,
    FILENAME     = 'c:\cs\cs6\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),

```

```

(
    NAME          = MSSQL_cs7,
    FILENAME     = 'c:\cs\cs7\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs8,
    FILENAME     = 'c:\cs\cs8\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs9,
    FILENAME     = 'c:\cs\cs9\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs10,
    FILENAME    = 'c:\cs\cs10\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs11,
    FILENAME     = 'c:\cs\cs11\' ,
    SIZE          = 116500MB,
    FILEGROWTH   = 0),

FILEGROUP MSSQL_misc_fg
(
    NAME          = MSSQL_misc1,
    FILENAME     = 'c:\misc\misc1\' ,
    SIZE          = 57500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc2,
    FILENAME     = 'c:\misc\misc2\' ,
    SIZE          = 57500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc3,
    FILENAME     = 'c:\misc\misc3\' ,
    SIZE          = 57500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc4,
    FILENAME     = 'c:\misc\misc4\' ,
    SIZE          = 57500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc5,
    FILENAME     = 'c:\misc\misc5\' ,
    SIZE          = 57500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc6,
    FILENAME     = 'c:\misc\misc6\' ,
    SIZE          = 57500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc7,
    FILENAME     = 'c:\misc\misc7\' ,
    SIZE          = 57500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc8,
    FILENAME     = 'c:\misc\misc8\' ,
    SIZE          = 57500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc9,
    FILENAME     = 'c:\misc\misc9\' ,
    SIZE          = 57500MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc10,
    FILENAME    = 'c:\misc\misc10\' ,
    SIZE          = 57500MB,

```

```

FILEGROWTH      = 0),
NAME            = MSSQL_miscl1,
FILENAME        = 'c:\misc\miscl1\' ,
SIZE            = 57500MB,
FILEGROWTH     = 0)

LOG ON
(
    NAME          = MSSQL_tpcc_log,
    FILENAME     = 'E:',           SIZE = 839600MB,
    FILEGROWTH   = 0)
COLLATE Latin1_General_BIN
GO

-----
-- Store ending time
-----
UPDATE tpcc_timer
SET end_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))
GO

SELECT DATEDIFF(second, (SELECT start_date FROM tpcc_timer), (SELECT end_date FROM tpcc_timer))
GO

-----
-- remove temporary table
-----
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
DROP TABLE tpcc_timer
GO

```

dbopt1.sql

```

-- File: DBOPT1.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Sets database options for load
--

USE master
GO

ALTER DATABASE tpcc SET RECOVERY BULK_LOGGED
GO

EXEC sp_dboption tpcc,'trunc. log on chkpt.',TRUE
GO

ALTER DATABASE tpcc SET TORN_PAGE_DETECTION OFF
GO

ALTER DATABASE tpcc SET PAGE_VERIFY NONE
GO

USE tpcc
GO

```

```

CHECKPOINT
GO

```

dbopt2.sql

```

-- File: DBOPT2.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Sets database options after load
--

ALTER DATABASE tpcc SET RECOVERY FULL
GO

USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates',1
GO

RECONFIGURE WITH OVERRIDE
GO

DECLARE @msg varchar(50)

-- OPTIONS FOR SQL SERVER 2000
-- Set option values for user-defined indexes --
-- 

SET @msg = ''
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ''
PRINT @msg

EXEC sp_indexoption 'customer',      'DisAllowPageLocks',   TRUE
EXEC sp_indexoption 'district',      'DisAllowPageLocks',   TRUE
EXEC sp_indexoption 'warehouse',     'DisAllowPageLocks',   TRUE
EXEC sp_indexoption 'stock',         'DisAllowPageLocks',   TRUE
EXEC sp_indexoption 'order_line',   'DisAllowRowLocks',    TRUE
EXEC sp_indexoption 'orders',       'DisAllowRowLocks',    TRUE
EXEC sp_indexoption 'new_order',    'DisAllowRowLocks',    TRUE
EXEC sp_indexoption 'item',          'DisAllowRowLocks',    TRUE
EXEC sp_indexoption 'item',          'DisAllowPageLocks',   TRUE
GO

Print '
Print *****
Print 'Pre-specified Locking Hierarchy:'
Print '  Lockflag = 0 ==> No pre-specified hierarchy'
Print '  Lockflag = 1 ==> Lock at Page-level then Table-level'
Print '  Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '  Lockflag = 3 ==> Lock at Table-level'

```

```

Print ' '
SELECT name,
       lockflags
  FROM sysindexes
 WHERE object_id('warehouse') = id OR
       object_id('district') = id OR
       object_id('customer') = id OR
       object_id('stock') = id OR
       object_id('orders') = id OR
       object_id('order_line') = id OR
       object_id('history') = id OR
       object_id('new_order') = id OR
       object_id('item') = id
 ORDER BY lockflags asc
GO

sp_configure 'allow updates',0
GO

RECONFIGURE WITH OVERRIDE
GO

EXEC sp_dboption tpcc,      'auto update statistics',      FALSE
EXEC sp_dboption tpcc,      'auto create statistics',      FALSE
GO

DECLARE @db_id int,
        @tbl_id int

SET    @db_id = DB_ID('tpcc')
SET    @tbl_id = OBJECT_ID('tpcc..warehouse')
DBCC PINTABLE (@db_id, @tbl_id)

SET    @tbl_id = OBJECT_ID('tpcc..district')
DBCC PINTABLE (@db_id, @tbl_id)

SET    @tbl_id = OBJECT_ID('tpcc..new_order')
DBCC PINTABLE (@db_id, @tbl_id)

SET    @tbl_id = OBJECT_ID('tpcc..item')
DBCC PINTABLE (@db_id, @tbl_id)
GO

```

RunSQLCfg.sql

```

-- File: RUNSQLCFG.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Sets suggested runtime server configuration
-- parameters
--

EXEC sp_configure 'show advanced option', 1
GO

RECONFIGURE WITH OVERRIDE
GO

```

```

-----+
-- change this value to approximately the number of connected users
EXEC sp_configure 'max worker threads',255

-----+
-- increase priority of user threads
EXEC sp_configure 'priority boost',1

-----+
-- disable automatic checkpointing
EXEC sp_configure 'recovery interval',32767

-----+
-- change to a mask appropriate for the number of processors on the server
EXEC sp_configure 'affinity mask',0xf

-----+
-- enable fibers
EXEC sp_configure 'lightweight pooling',1
GO

RECONFIGURE WITH OVERRIDE
GO

```

VerifyTpccLoad.sql

```

-- File: VerifyTPCCLoad.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--

SET NOCOUNT ON
PRINT ' '
SELECT  CONVERT(CHAR(30), GETDATE(), 21)
PRINT ' '

USE      tpcc
GO

IF EXISTS (SELECT name
            FROM  sysobjects
           WHERE name   = 'TPCC_INFO' AND
                 type    = 'U')
    DROP TABLE TPCC_INFO
GO
PRINT  'WAREHOUSE TABLE'
SELECT  count_big(*)
FROM    warehouse
GO

PRINT  'DISTRICT TABLE = (10 * No of warehouses)'
SELECT  count_big(*)
FROM    district
GO

```

```

PRINT 'ITEM TABLE = 100,000'
SELECT count_big(*)
FROM item
GO

PRINT 'CUSTOMER TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM customer
GO

PRINT 'ORDERS TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM orders
GO

PRINT 'HISTORY TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM history
GO

PRINT 'STOCK TABLE = (100,000 * No of warehouses)'
SELECT count_big(*)
FROM stock
GO

PRINT 'ORDER_LINE TABLE = (300,000 * No of warehouses + some change)'
SELECT count_big(*)
FROM order_line
GO

PRINT 'NEW_ORDER TABLE = (9000 * No of warehouses)'
SELECT count_big(*)
FROM new_order
GO

CREATE TABLE TPCC_INFO
(
    INFO_DATE datetime,
    NUM_WAREHOUSE bigint,
    WAREHOUSE_TARGET bigint,
    NUM_DISTRICT bigint,
    DISTRICT_TARGET bigint,
    NUM_ITEM bigint,
    ITEM_TARGET bigint,
    NUM_CUSTOMER bigint,
    CUSTOMER_TARGET bigint,
    NUM_ORDERS bigint,
    ORDERS_TARGET bigint,
    ORDERS_TARGET_LOW bigint,
    ORDERS_TARGET_HIGH bigint,
    NUM_ORDER_LINE bigint,
    ORDER_LINE_TARGET bigint,
    ORDER_LINE_TARGET_LOW bigint,
    ORDER_LINE_TARGET_HIGH bigint,
    NUM_NEW_ORDER bigint,
    NEW_ORDER_TARGET bigint,
    NEW_ORDER_TARGET_LOW bigint,
    NEW_ORDER_TARGET_HIGH bigint,
    NUM_HISTORY bigint,
    HISTORY_TARGET bigint,
    NUM_STOCK bigint,
    STOCK_TARGET bigint
)
GO

```

```

DECLARE @NUM_WAREHOUSE bigint,
        @WAREHOUSE_TARGET bigint,
        @NUM_DISTRICT bigint,
        @DISTRICT_TARGET bigint,
        @NUM_ITEM bigint,
        @ITEM_TARGET bigint,
        @NUM_CUSTOMER bigint,
        @CUSTOMER_TARGET bigint,
        @NUM_ORDERS bigint,
        @ORDERS_TARGET bigint,
        @ORDERS_TARGET_LOW bigint,
        @ORDERS_TARGET_HIGH bigint,
        @NUM_ORDER_LINE bigint,
        @ORDER_LINE_TARGET bigint,
        @ORDER_LINE_TARGET_LOW bigint,
        @ORDER_LINE_TARGET_HIGH bigint,
        @NUM_NEW_ORDER bigint,
        @NEW_ORDER_TARGET bigint,
        @NEW_ORDER_TARGET_LOW bigint,
        @NEW_ORDER_TARGET_HIGH bigint,
        @NUM_HISTORY bigint,
        @HISTORY_TARGET bigint,
        @NUM_STOCK bigint,
        @STOCK_TARGET bigint

-- set the local variables prior to inserting them into the TPCC_INFO table
SELECT @NUM_WAREHOUSE = COUNT_BIG(*)
FROM warehouse

SELECT @NUM_DISTRICT = COUNT_BIG(*)
FROM district

SELECT @NUM_ITEM = COUNT_BIG(*)
FROM item

SELECT @NUM_CUSTOMER = COUNT_BIG(*)
FROM customer

SELECT @NUM_ORDERS = COUNT_BIG(*)
FROM orders

SELECT @NUM_ORDER_LINE = COUNT_BIG(*)
FROM order_line

SELECT @NUM_NEW_ORDER = COUNT_BIG(*)
FROM new_order

SELECT @NUM_HISTORY = COUNT_BIG(*)
FROM history

SELECT @NUM_STOCK = COUNT_BIG(*)
FROM stock

--- now calculate and set the target values
SELECT @WAREHOUSE_TARGET = @NUM_WAREHOUSE,
       @DISTRICT_TARGET = @NUM_WAREHOUSE * 10,
       @ITEM_TARGET = 100000,
       @CUSTOMER_TARGET = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET_LOW = @ORDERS_TARGET - FLOOR(@ORDERS_TARGET * .01),
       @ORDERS_TARGET_HIGH = @ORDERS_TARGET + FLOOR(@ORDERS_TARGET * .01),
       @ORDER_LINE_TARGET = @NUM_WAREHOUSE * 300000,

```

```

    .01),
    @ORDER_LINE_TARGET_LOW = @ORDER_LINE_TARGET - FLOOR(@ORDER_LINE_TARGET *
    .01),
    @ORDER_LINE_TARGET_HIGH = @ORDER_LINE_TARGET + FLOOR(@ORDER_LINE_TARGET *
    .01),
    @NEW_ORDER_TARGET = @NUM_WAREHOUSE * 9000,
    @NEW_ORDER_TARGET_LOW = @NEW_ORDER_TARGET - FLOOR(@NEW_ORDER_TARGET *
    .01),
    @NEW_ORDER_TARGET_HIGH = @NEW_ORDER_TARGET + FLOOR(@NEW_ORDER_TARGET *
    .01),
    @HISTORY_TARGET = @NUM_WAREHOUSE * 30000,
    @STOCK_TARGET = @NUM_WAREHOUSE * 100000

--- insert the values into TPCC_INFO
INSERT INTO TPCC_INFO VALUES
    (GETDATE(),
    @NUM_WAREHOUSE,
    @WAREHOUSE_TARGET,
    @NUM_DISTRICT,
    @DISTRICT_TARGET,
    @NUM_ITEM,
    @ITEM_TARGET,
    @NUM_CUSTOMER,
    @CUSTOMER_TARGET,
    @NUM_ORDERS,
    @ORDERS_TARGET,
    @ORDERS_TARGET_LOW,
    @ORDERS_TARGET_HIGH,
    @NUM_ORDER_LINE,
    @ORDER_LINE_TARGET,
    @ORDER_LINE_TARGET_LOW,
    @ORDER_LINE_TARGET_HIGH,
    @NUM_NEW_ORDER,
    @NEW_ORDER_TARGET,
    @NEW_ORDER_TARGET_LOW,
    @NEW_ORDER_TARGET_HIGH,
    @NUM_HISTORY,
    @HISTORY_TARGET,
    @NUM_STOCK,
    @STOCK_TARGET)

GO

--- output the row counts from the build
PRINT ''
PRINT ''
PRINT '-----'
PRINT '| WAREHOUSE TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_WAREHOUSE AS 'Warehouse Rows',
    WAREHOUSE_TARGET AS 'Warehouse Target',
    CASE WHEN (NUM_WAREHOUSE = WAREHOUSE_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!!'
    END AS 'Warehouse Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| DISTRICT TABLE |'
PRINT '-----'
SELECT TOP 1

```

```

    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_DISTRICT AS 'District Rows',
    DISTRICT_TARGET AS 'District Target',
    CASE WHEN (NUM_DISTRICT = DISTRICT_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!!'
    END AS 'District Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ITEM TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_ITEM AS 'Item Rows',
    ITEM_TARGET AS 'Item Target',
    CASE WHEN (NUM_ITEM = ITEM_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!!'
    END AS 'Item Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| CUSTOMER TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_CUSTOMER AS 'Customer Rows',
    CUSTOMER_TARGET AS 'Customer Target',
    CASE WHEN (NUM_CUSTOMER = CUSTOMER_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!!'
    END AS 'Customer Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDERS TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_ORDERS AS 'Orders Rows',
    ORDERS_TARGET AS 'Orders Target',
    CASE WHEN (NUM_ORDERS = ORDERS_TARGET)
        THEN 'OK!'
        WHEN (NUM_ORDERS BETWEEN ORDERS_TARGET_LOW AND ORDERS_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!!'
    END AS 'Orders Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'

```

```

PRINT '| ORDER LINE TABLE      |'
PRINT'-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_ORDER_LINE          AS 'Order Line Rows',
    ORDER_LINE_TARGET        AS 'Order Line Target',
    CASE WHEN (NUM_ORDER_LINE = ORDER_LINE_TARGET)
        THEN 'OK!'
        WHEN (NUM_ORDER_LINE BETWEEN ORDER_LINE_TARGET_LOW AND
ORDER_LINE_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!!'
    END
FROM   TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '|-----|'
PRINT '| NEW ORDER TABLE      |'
PRINT'-----'

SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_NEW_ORDER           AS 'New Order Rows',
    NEW_ORDER_TARGET         AS 'New Order Target',
    CASE WHEN (NUM_NEW_ORDER = NEW_ORDER_TARGET)
        THEN 'OK!'
        WHEN (NUM_NEW_ORDER BETWEEN NEW_ORDER_TARGET_LOW AND
NEW_ORDER_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!!'
    END
FROM   TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '|-----|'
PRINT '| HISTORY TABLE        |'
PRINT'-----'

SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_HISTORY              AS 'History Rows',
    HISTORY_TARGET            AS 'History Target',
    CASE WHEN (NUM_HISTORY = HISTORY_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!!'
    END
FROM   TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '|-----|'
PRINT '| STOCK TABLE           |'
PRINT'-----'

SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_STOCK                AS 'Stock Rows',
    STOCK_TARGET               AS 'Stock Target',
    CASE WHEN (NUM_STOCK = STOCK_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!!'
    END
FROM   TPCC_INFO
GO

```

```

END
AS 'Stock Message'

FROM   TPCC_INFO
GO

-----  
-- Check Indexes  
-----  
USE tpcc  
GO

PRINT ''
PRINT ''
PRINT '|-----|'
PRINT '| TPC-C INDEXES      |'
PRINT'-----'

EXEC sp_helpindex  warehouse
EXEC sp_helpindex  district
EXEC sp_helpindex  item
EXEC sp_helpindex  customer
EXEC sp_helpindex  orders
EXEC sp_helpindex  order_line
EXEC sp_helpindex  new_order
EXEC sp_helpindex  history
EXEC sp_helpindex  stock
GO

```

backup.sql

```

-- File: BACKUP.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
--  
  

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',  
      CONVERT(VARCHAR(30),@startdate, 21)

DUMP DATABASE tpcc TO tpccback1, tpccback2, tpccback3, tpccback4 WITH init, stats = 1

SELECT @enddate = GETDATE()
SELECT 'End date:',  
      CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ',  
      DATEDIFF(second, @startdate, @enddate)
GO

```

restore.sql

```

-- File: RESTORE.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
-- Copyright Microsoft, 2005
--
```

```
--  
-----  
DECLARE @startdate DATETIME,  
        @enddate DATETIME  
  
SELECT @startdate = GETDATE()  
SELECT 'Start date:',  
      CONVERT(VARCHAR(30),@startdate, 21)  
  
LOAD DATABASE tpcc FROM tpccback1, tpccback2, tpccback3, tpccback4 WITH stats = 1,  
replace  
  
SELECT @enddate = GETDATE()  
SELECT 'End date: ',  
      CONVERT(VARCHAR(30),@enddate, 21)  
SELECT 'Elapsed time (in seconds): ',  
      DATEDIFF(second, @startdate, @enddate)  
GO  
  
use tpcc  
Go  
DROP INDEX orders.orders_ncl  
go
```

sqlshutdown.sql

```
--  
-- File: SQLSHUTDOWN.SQL  
-- Microsoft TPC-C Benchmark Kit Ver. 4.68  
-- Copyright Microsoft, 2006  
--  
-- Checkpoints tpcc database and issues a shutdown  
--  
-----  
USE tpcc  
GO  
  
CHECKPOINT  
GO  
  
SHUTDOWN  
GO
```

idxcuscl.sql

```
--  
-- File: IDXCUSCL.SQL  
-- Microsoft TPC-C Benchmark Kit Ver. 4.68  
-- Copyright Microsoft, 2006  
--  
-- Creates clustered index on customer table  
--  
-----  
USE tpcc  
GO  
  
DECLARE @startdate DATETIME,  
        @enddate DATETIME
```

```
SELECT @startdate = GETDATE()  
SELECT 'Start date:',  
      CONVERT(VARCHAR(30),@startdate, 21)  
  
IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_cl' )  
  DROP INDEX customer.customer_cl  
  
CREATE UNIQUE CLUSTERED INDEX customer_cl ON customer(c_w_id, c_d_id, c_id)  
  ON MSSQL_cs_fg  
  
SELECT @enddate = GETDATE()  
SELECT 'End date:',  
      CONVERT(VARCHAR(30),@enddate, 21)  
SELECT 'Elapsed time (in seconds): ',  
      DATEDIFF(second, @startdate, @enddate)  
GO
```

idxcusnc.sql

```
--  
-- File: IDXCUSNC.SQL  
-- Microsoft TPC-C Benchmark Kit Ver. 4.68  
-- Copyright Microsoft, 2006  
--  
-- Creates non-clustered index on customer table  
--  
-----  
USE tpcc  
GO  
  
DECLARE @startdate DATETIME,  
        @enddate DATETIME  
  
SELECT @startdate = GETDATE()  
SELECT 'Start date:',  
      CONVERT(VARCHAR(30),@startdate, 21)  
  
IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_ncl' )  
  DROP INDEX customer.customer_ncl  
  
CREATE UNIQUE NONCLUSTERED INDEX customer_ncl ON customer(c_w_id, c_d_id, c_last,  
c_first, c_id)  
  ON MSSQL_cs_fg  
  
SELECT @enddate = GETDATE()  
SELECT 'End date:',  
      CONVERT(VARCHAR(30),@enddate, 21)  
SELECT 'Elapsed time (in seconds): ',  
      DATEDIFF(second, @startdate, @enddate)  
GO
```

idxdiscl.sql

```
--  
-- File: IDXDISCL.SQL  
-- Microsoft TPC-C Benchmark Kit Ver. 4.68  
-- Copyright Microsoft, 2006  
--
```

```
-- Creates clustered index on district table --
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'district_c1' )
    DROP INDEX district.district_c1

CREATE UNIQUE CLUSTERED INDEX district_c1 ON district(d_w_id, d_id)
    WITH FILLFACTOR=100 ON MSSQL_msc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxitmcl.sql

```
-- File: IDXITMCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on item table
--

-----  

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'item_c1' )
    DROP INDEX item.item_c1

CREATE UNIQUE CLUSTERED INDEX item_c1 ON item(i_id)
    ON MSSQL_msc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxhiscl.sql

```
-----  

-- File: IDXHISCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on history table
-- CAUTION: This index is only beneficial for systems
-- CAUTION: with 8 or more processors.
-- CAUTION: It may negatively impact performance on
-- CAUTION: systems with less than 8 processors.
-- USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'history_c1' )
    DROP INDEX history.history_c1

CREATE UNIQUE CLUSTERED INDEX history_c1 ON history(h_c_w_id, h_date, h_c_d_id,
h_c_id, h_amount)
    ON MSSQL_msc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxnodcl.sql

```
-----  

-- File: IDXXNODCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on new-order table
-- USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'new_order_c1' )
    DROP INDEX new_order.new_order_c1
```

```

CREATE UNIQUE CLUSTERED INDEX new_order_c1 ON new_order(no_w_id, no_d_id, no_o_id)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxodlcl.sql

```

-- File: IDXODLCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on order-line table
-- 

-----  

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'order_line_c1' )
    DROP INDEX order_line.order_line_c1

CREATE UNIQUE CLUSTERED INDEX order_line_c1 ON order_line(o_l_w_id, o_l_d_id, o_l_o_id,
o_l_number)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxordcl.sql

```

-- File: IDXORDCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on orders table
-- 

-----  

USE tpcc
GO

```

```

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'orders_c1' )
    DROP INDEX orders.orders_c1

CREATE UNIQUE CLUSTERED INDEX orders_c1 ON orders(o_w_id, o_d_id, o_id)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxordnc.sql

```

-- File: IDXORDNC.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates non-clustered index on orders table
-- 

-----  

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'orders_nc1' )
    DROP INDEX orders.orders_nc1

CREATE INDEX orders_nc1 ON orders(o_w_id, o_d_id, o_c_id, o_id)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
DATEDIFF(second, @startdate, @enddate)
GO

```

idxstkcl.sql

```

-- File: IDXSTKCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- 
```

```
-- Creates clustered index on stock table
-- USE tpcc
GO
DECLARE @startdate DATETIME,
        @enddate DATETIME
SELECT @startdate = GETDATE()
SELECT 'Start date:', CONVERT(VARCHAR(30),@startdate,21)
IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'stock_c1' )
    DROP INDEX stock.stock_c1
CREATE UNIQUE CLUSTERED INDEX stock_c1 ON stock(s_i_id, s_w_id)
    ON MSSQL_cs_fg
SELECT @enddate = GETDATE()
SELECT 'End date:', CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', DATEDIFF(second, @startdate, @enddate)
GO
```

idxwarcl.sql

```
-- File: IDXWARCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on warehouse table
-- USE tpcc
GO
DECLARE @startdate DATETIME,
        @enddate DATETIME
SELECT @startdate = GETDATE()
SELECT 'Start date:', CONVERT(VARCHAR(30),@startdate,21)
IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'warehouse_cl' )
    DROP INDEX warehouse.warehouse_cl
CREATE UNIQUE CLUSTERED INDEX warehouse_c1 ON warehouse(w_id)
    WITH FILLFACTOR=100 ON MSSQL_misc_fg
SELECT @enddate = GETDATE()
SELECT 'End date:', CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', DATEDIFF(second, @startdate, @enddate)
GO
```

tables.sql

```
-- File: TABLES.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates TPC-C tables
SET ANSI_NULL_DFLT_OFF ON
GO
USE tpcc
GO
-- Remove all existing TPC-C tables
if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
if exists ( select name from sysobjects where name = 'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )
    drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
    drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
    drop table stock
go
-- Create new tables
create table warehouse
(
    w_id          int,
    w_ytd         money,
    w_tax          smallmoney,
    w_name         char(10),
    w_street_1     char(20),
    w_street_2     char(20),
    w_city          char(20),
    w_state         char(2),
```

```

        w_zip           char(9)
) on MSSQL_misc_fg
go

create table district
(
        d_id            tinyint,
        d_w_id          int,
        d_ytd           money,
        d_next_o_id     int,
        d_tax           smallmoney,
        d_name          char(10),
        d_street_1      char(20),
        d_street_2      char(20),
        d_city           char(20),
        d_state          char(2),
        d_zip            char(9)
) on MSSQL_misc_fg
go

create table customer
(
        c_id            int,
        c_d_id          tinyint,
        c_w_id          int,
        c_discount      smallmoney,
        c_credit_lim    money,
        c_last           char(16),
        c_first          char(16),
        c_credit         char(2),
        c_balance        money,
        c_ytd_payment   money,
        c_payment_cnt   smallint,
        c_delivery_cnt  smallint,
        c_street_1       char(20),
        c_street_2       char(20),
        c_city            char(20),
        c_state           char(2),
        c_zip             char(9),
        c_phone          char(16),
        c_since          datetime,
        c_middle          char(2),
        c_data            char(500)
) on MSSQL_cs_fg
go

-- Use the following table option if using c_data varchar(max)
-- sp_tableoption 'customer','large value types out of row','1'
-- go

create table history
(
        h_c_id           int,
        h_c_d_id         tinyint,
        h_c_w_id         int,
        h_d_id           tinyint,
        h_w_id           int,
        h_date           datetime,
        h_amount         smallmoney,
        h_data            char(24)
) on MSSQL_misc_fg
go

```

```

create table new_order
(
        no_o_id          int,
        no_d_id          tinyint,
        no_w_id          int
) on MSSQL_misc_fg
go

create table orders
(
        o_id            int,
        o_d_id          tinyint,
        o_w_id          int,
        o_c_id          int,
        o_carrier_id    tinyint,
        o.ol_cnt        tinyint,
        o.all_local     tinyint,
        o_entry_d       datetime
) on MSSQL_misc_fg
go

create table order_line
(
        ol_o_id          int,
        ol_d_id          tinyint,
        ol_w_id          int,
        ol_number        tinyint,
        ol_i_id          int,
        ol_delivery_d    datetime,
        ol_amount        smallmoney,
        ol_supply_w_id   int,
        ol_quantity      smallint,
        ol_dist_info     char(24)
) on MSSQL_misc_fg
go

create table item
(
        i_id            int,
        i_name          char(24),
        i_price         smallmoney,
        i_data           char(50),
        i_im_id          int
) on MSSQL_misc_fg
go

create table stock
(
        s_i_id           int,
        s_w_id           int,
        s_quantity       smallint,
        s_ytd            int,
        s_order_cnt      smallint,
        s_remote_cnt     smallint,
        s_data            char(50),
        s_dist_01         char(24),
        s_dist_02         char(24),
        s_dist_03         char(24),
        s_dist_04         char(24),
        s_dist_05         char(24),
        s_dist_06         char(24),
        s_dist_07         char(24),
        s_dist_08         char(24),

```

```

    s_dist_09      char(24),
    s_dist_10      char(24)
) on MSSQL_cs_fg
go

```

neword.sql

```

-- File: NEWORD.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates neworder stored procedure
--
-- Interface Level: 4.20.000
--

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO

CREATE PROCEDURE tpcc_neworder
    @w_id          int,
    @d_id          tinyint,
    @c_id          int,
    @o.ol_cnt      tinyint,
    @o.all_local   tinyint,
    @i_id1         int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i_id2         int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i_id3         int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i_id4         int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i_id5         int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
    @i_id6         int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
    @i_id7         int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
    @i_id8         int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
    @i_id9         int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
    @i_id10        int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i_id11        int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i_id12        int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
    @i_id13        int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
    @i_id14        int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
    @i_id15        int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
DECLARE @w_tax      smallmoney,
        @d_tax      smallmoney,
        @c_last     char(16),
        @c_credit   char(2),
        @c_discount smallmoney,
        @i_price    smallmoney,
        @i_name     char(24),

```

```

    @i_data      char(50),
    @o_entry_d   datetime,
    @remote_flag int,
    @s_quantity  smallint,
    @s_data      char(50),
    @s_dist      char(24),
    @li_no       int,
    @o_id        int,
    @commit_flag tinyint,
    @li_id       int,
    @li_s_w_id   int,
    @li_qty      smallint,
    @ol_number   int,
    @c_id_local  int

BEGIN
BEGIN TRANSACTION n
-----+
-- get district tax and next available order id and update
-- plus initialize local variables
-----+
UPDATE district
SET    @d_tax      = d_tax,
       @o_id       = d_next_o_id,
       d_next_o_id = d_next_o_id + 1,
       @o_entry_d  = GETDATE(),
       @li_no      = 0,
       @commit_flag = 1
WHERE   d_w_id      = @w_id AND
       d_id       = @d_id

-----+
-- process orderlines
-----+
WHILE (@li_no < @o.ol_cnt)
BEGIN
    SELECT @li_no = @li_no + 1
-----+
-- set i_id, s_w_id, and qty for this lineitem
-----+
SELECT @li_id = CASE @li_no
    WHEN 1 THEN @i_id1
    WHEN 2 THEN @i_id2
    WHEN 3 THEN @i_id3
    WHEN 4 THEN @i_id4
    WHEN 5 THEN @i_id5
    WHEN 6 THEN @i_id6
    WHEN 7 THEN @i_id7
    WHEN 8 THEN @i_id8
    WHEN 9 THEN @i_id9
    WHEN 10 THEN @i_id10
    WHEN 11 THEN @i_id11
    WHEN 12 THEN @i_id12
    WHEN 13 THEN @i_id13
    WHEN 14 THEN @i_id14
    WHEN 15 THEN @i_id15
END,
@li_s_w_id = CASE @li_no
    WHEN 1 THEN @s_w_id1

```

```

WHEN 2 THEN @s_w_id2
WHEN 3 THEN @s_w_id3
WHEN 4 THEN @s_w_id4
WHEN 5 THEN @s_w_id5
WHEN 6 THEN @s_w_id6
WHEN 7 THEN @s_w_id7
WHEN 8 THEN @s_w_id8
WHEN 9 THEN @s_w_id9
WHEN 10 THEN @s_w_id10
WHEN 11 THEN @s_w_id11
WHEN 12 THEN @s_w_id12
WHEN 13 THEN @s_w_id13
WHEN 14 THEN @s_w_id14
WHEN 15 THEN @s_w_id15
END,
@li_qty = CASE @li_no
WHEN 1 THEN @ol_qty1
WHEN 2 THEN @ol_qty2
WHEN 3 THEN @ol_qty3
WHEN 4 THEN @ol_qty4
WHEN 5 THEN @ol_qty5
WHEN 6 THEN @ol_qty6
WHEN 7 THEN @ol_qty7
WHEN 8 THEN @ol_qty8
WHEN 9 THEN @ol_qty9
WHEN 10 THEN @ol_qty10
WHEN 11 THEN @ol_qty11
WHEN 12 THEN @ol_qty12
WHEN 13 THEN @ol_qty13
WHEN 14 THEN @ol_qty14
WHEN 15 THEN @ol_qty15
END
-----  

-- get item data (no one updates item)
-----  

SELECT @i_price = i_price,  

       @i_name = i_name,  

       @i_data = i_data  

FROM item WITH (repeatableread)  

WHERE i_id = @li_id
-----  

-- update stock values
-----  

UPDATE stock  

SET s_ytd = s_ytd + @li_qty,  

     @s_quantity = s_quantity - @li_qty +  

                  CASE WHEN (s_quantity - @li_qty < 10) THEN 91
ELSE 0 END,  

     s_order_cnt = s_order_cnt + 1,  

     s_remote_cnt = s_remote_cnt +  

                  CASE WHEN (@li_s_w_id = @w_id) THEN 0 ELSE 1
END,  

     @s_data,  

     @s_dist = CASE @d_id
WHEN 1 THEN s_dist_01
WHEN 2 THEN s_dist_02
WHEN 3 THEN s_dist_03
WHEN 4 THEN s_dist_04
WHEN 5 THEN s_dist_05
WHEN 6 THEN s_dist_06
WHEN 7 THEN s_dist_07
WHEN 8 THEN s_dist_08
WHEN 9 THEN s_dist_09
WHEN 10 THEN s_dist_10
END
WHERE   s_i_id = @li_id AND
        s_w_id = @li_s_w_id
-----  

-- if there actually is a stock (and item) with these ids, go to work
-----  

IF (@@rowcount > 0)
BEGIN
-----  

-- insert order_line data (using data from item and stock)
-----  

INSERT INTO order_line VALUES( @o_id,
                               @d_id,
                               @w_id,
                               @li_no,
                               @li_id,
                               'dec 31, 1899',
                               @i_price * @li_qty,
                               @li_s_w_id,
                               @li_qty,
                               @s_dist)
-----  

-- send line-item data to client
-----  

SELECT @i_name,
       @s_quantity,
       b_g = CASE WHEN ( (patindex('%ORIGINAL%',@i_data) > 0) AND
                           (patindex('%ORIGINAL%',@s_data) > 0) )
                           THEN 'B' ELSE 'G' END,
       @i_price,
       @i_price * @li_qty
END
ELSE
BEGIN
-----  

-- no item (or stock) found - triggers rollback condition
-----  

SELECT '',0,'',0,0
SELECT @commit_flag = 0
END
-----  

-- get customer last name, discount, and credit rating
-----  

SELECT @c_last = c_last,
       @c_discount = c_discount,
       @c_credit = c_credit,
       @c_id_local = c_id
FROM customer WITH (repeatableread)
WHERE c_id = @c_id AND
      c_w_id = @w_id AND
      c_d_id = @d_id
-----  

-- insert fresh row into orders table
-----
```

```

INSERT INTO orders VALUES ( @o_id,
                           @d_id,
                           @w_id,
                           @c_id_local,
                           0,
                           @o.ol_cnt,
                           @o.all_local,
                           @o_entry_d)

-----
-- insert corresponding row into new_order table
-----
INSERT INTO new_order VALUES ( @o_id,
                               @d_id,
                               @w_id)

-----
-- select warehouse tax
-----
SELECT @w_tax = w_tax
FROM   warehouse WITH (repeatableread)
WHERE  w_id = @w_id

IF (@commit_flag = 1)
    COMMIT TRANSACTION n
ELSE
-----
-- all that work for nuthin!!!
-----
ROLLBACK TRANSACTION n

-----
-- return order data to client
-----
SELECT @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag
END
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

delivery.sql

```

-- File: DELIVERY.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates delivery stored procedure
-- Interface Level: 4.20.000
--
```

```

-- -----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO

CREATE PROC tpcc_delivery
    @w_id           int,
    @o_carrier_id  smallint
AS
DECLARE @d_id      tinyint,
        @o_id      int,
        @c_id      int,
        @total     money,
        @oid1     int,
        @oid2     int,
        @oid3     int,
        @oid4     int,
        @oid5     int,
        @oid6     int,
        @oid7     int,
        @oid8     int,
        @oid9     int,
        @oid10    int

SELECT @d_id = 0
BEGIN TRANSACTION d
WHILE (@d_id < 10)
BEGIN
    SELECT @d_id = @d_id + 1,
           @total = 0,
           @o_id = 0

    SELECT TOP 1
           @o_id = no_o_id
    FROM   new_order WITH (serializable updlock)
    WHERE  no_w_id = @w_id AND
           no_d_id = @d_id
    ORDER BY no_o_id ASC

    IF (@@rowcount > 0)
    BEGIN
        -- claim the order for this district
        DELETE new_order
        WHERE  no_w_id = @w_id AND
               no_d_id = @d_id AND
               no_o_id = @o_id

        -- set carrier_id on this order (and get customer id)
        UPDATE orders
        SET   o_carrier_id = @o_carrier_id,

```

```

WHERE      @c_id          = o_c_id
          o_w_id        = @w_id AND
          o_d_id        = @d_id AND
          o_id          = @o_id

-- set date in all lineitems for this order (and sum amounts)
UPDATE    order_line
SET       ol_delivery_d  = GETDATE(),
          @total         = @total + ol_amount
WHERE      ol_w_id        = @w_id AND
          ol_d_id        = @d_id AND
          ol_o_id        = @o_id

-- accumulate lineitem amounts for this order into customer
UPDATE    customer
SET       c_balance      = c_balance + @total,
          c_delivery_cnt = c_delivery_cnt + 1
WHERE      c_w_id        = @w_id AND
          c_d_id         = @d_id AND
          c_id          = @c_id
END

SELECT   @oid1  = CASE @d_id WHEN 1 THEN @o_id ELSE @oid1 END,
        @oid2  = CASE @c_id WHEN 2 THEN @o_id ELSE @oid2 END,
        @oid3  = CASE @d_id WHEN 3 THEN @o_id ELSE @oid3 END,
        @oid4  = CASE @d_id WHEN 4 THEN @o_id ELSE @oid4 END,
        @oid5  = CASE @d_id WHEN 5 THEN @o_id ELSE @oid5 END,
        @oid6  = CASE @d_id WHEN 6 THEN @o_id ELSE @oid6 END,
        @oid7  = CASE @d_id WHEN 7 THEN @o_id ELSE @oid7 END,
        @oid8  = CASE @d_id WHEN 8 THEN @o_id ELSE @oid8 END,
        @oid9  = CASE @d_id WHEN 9 THEN @o_id ELSE @oid9 END,
        @oid10 = CASE @d_id WHEN 10 THEN @o_id ELSE @oid10 END
END

COMMIT TRANSACTION d

-- return delivery data to client

SELECT  @oid1,
        @oid2,
        @oid3,
        @oid4,
        @oid5,
        @oid6,
        @oid7,
        @oid8,
        @oid9,
        @oid10
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

null-txns.sql

```

-- File: NULL-TXNS.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68

```

```

Copyright Microsoft, 2006
-- This script will create stored procs which
-- accept the same parameters and return correctly
-- formed results sets to match the standard TPC-C
-- stored procs. Of course, the advantage is that
-- these stored procs place almost no load on
-- SQL Server and do not require a database.
-- Interface Level: 4.10.000
-- -----
USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
DROP PROCEDURE tpcc_delivery
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
DROP PROCEDURE tpcc_orderstatus
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
DROP PROCEDURE tpcc_payment
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
DROP PROCEDURE tpcc_stocklevel
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_version' )
DROP PROCEDURE tpcc_version
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'order_line_null' )
DROP PROCEDURE order_line_null
GO

CREATE PROCEDURE tpcc_delivery
          @w_id           int,
          @o_carrier_id   smallint
AS
DECLARE @d_id      tinyint,
        @o_id       int,
        @c_id       int,
        @total      numeric(12,2),
        @oid1      int,
        @oid2      int,
        @oid3      int,
        @oid4      int,
        @oid5      int,
        @oid6      int,
        @oid7      int,
        @oid8      int,
        @oid9      int,
        @oid10     int,
        @delaytime  varchar(30)
----- uniform random delay of 0 - 1 second; avg = 0.50
-----
```

```

SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*1.00) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001
GO

CREATE PROCEDURE tpcc_neworder
    @w_id          int,
    @d_id          tinyint,
    @c_id          int,
    @o.ol_cnt      tinyint,
    @o.all_local   tinyint,
    @i.id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i.id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i.id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i.id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i.id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
    @i.id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
    @i.id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
    @i.id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
    @i.id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
    @i.id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i.id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i.id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
    @i.id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
    @i.id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
    @i.id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
DECLARE @w_tax      numeric(4,4),
        @d_tax      numeric(4,4),
        @c_last     char(16),
        @c_credit   char(2),
        @c_discount numeric(4,4),
        @i_price    numeric(5,2),
        @i_name     char(24),
        @o_entry_d  datetime,
        @li_no      int,
        @o_id       int,
        @commit_flag tinyint,
        @li_id      int,
        @li_qty     smallint,
        @delaytime  varchar(30)

BEGIN
-----  

-- uniform random delay of 0 - 0.6 second; avg = 0.3
-----  

SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.60) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

-----  

-- process orderlines
-----  

SELECT @commit_flag = 1,
       @li_no      = 0

WHILE (@li_no < @o.ol_cnt)

```

```

BEGIN
    SELECT @li_id = CASE @li_no
        WHEN 1 THEN @i.id1
        WHEN 2 THEN @i.id2
        WHEN 3 THEN @i.id3
        WHEN 4 THEN @i.id4
        WHEN 5 THEN @i.id5
        WHEN 6 THEN @i.id6
        WHEN 7 THEN @i.id7
        WHEN 8 THEN @i.id8
        WHEN 9 THEN @i.id9
        WHEN 10 THEN @i.id10
        WHEN 11 THEN @i.id11
        WHEN 12 THEN @i.id12
        WHEN 13 THEN @i.id13
        WHEN 14 THEN @i.id14
        WHEN 15 THEN @i.id15
    END

    SELECT @li_no = @li_no + 1

    SELECT @i_price = 23.45, @li_qty = @li_no

    IF (@li_id = 999999)
        BEGIN
            SELECT '',0,'',0,0
            SELECT @commit_flag = 0
        END
    ELSE
        BEGIN
            SELECT 'Item Name blah',
                   17,
                   'G',
                   @i_price,
                   @i_price * @li_qty
        END
    END

-----
-- return order data to client
-----
SELECT @w_tax = 0.1234,
       @d_tax = 0.0987,
       @o_id = 3001,
       @c_last = 'BAROUGHTABLE',
       @c_discount = 0.2198,
       @c_credit = 'GC',
       @o_entry_d = GETDATE()

SELECT @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag

END
GO

CREATE PROCEDURE tpcc_orderstatus

```

```

        @w_id      int,
        @d_id      tinyint,
        @c_id      int,
        @c_last    char(16) = ''

AS
DECLARE @c_balance  numeric(12,2),
        @c_first   char(16),
        @c_middle  char(2),
        @o_id      int,
        @o_entry_d datetime,
        @o_carrier_id smallint,
        @ol_cnt    smallint,
        @delaytime varchar(30)

-----
-- uniform random delay of 0 - 0.2 second; avg = 0.1
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT @c_id      = 113,
        @c_balance = -10.00,
        @c_first   = '8YCodgytqCj8',
        @c_middle  = 'OE',
        @c_last    = 'OUGHTTOUGHTABLE',
        @o_id      = 3456,
        @o_entry_d = GETDATE(),
        @o_carrier_id = 1

SELECT @ol_cnt = (RAND() * 11) + 5

SET ROWCOUNT @ol_cnt

SELECT ol_supply_w_id,
        ol_i_id,
        ol_quantity,
        ol_amount,
        ol_delivery_d
FROM order_line_null

SELECT @c_id,
        @c_last,
        @c_first,
        @c_middle,
        @o_entry_d,
        @o_carrier_id,
        @c_balance,
        @o_id
GO

CREATE PROCEDURE tpcc_payment
        @w_id      int,
        @c_w_id    int,
        @h_amount  numeric(6,2),
        @d_id      tinyint,
        @c_d_id    tinyint,
        @c_id      int,
        @c_last    char(16) = ''

```

```

AS
DECLARE @w_street_1    char(20),
        @w_street_2    char(20),
        @w_city        char(20),
        @w_state       char(2),
        @w_zip         char(9),
        @w_name        char(10),
        @d_street_1    char(20),
        @d_street_2    char(20),
        @d_city        char(20),
        @d_state       char(2),
        @d_zip         char(9),
        @d_name        char(10),
        @c_first       char(16),
        @c_middle      char(2),
        @c_street_1    char(20),
        @c_street_2    char(20),
        @c_city        char(20),
        @c_state       char(2),
        @c_zip         char(9),
        @c_phone       char(16),
        @c_since       datetime,
        @c_credit      char(2),
        @c_credit_lim  numeric(12,2),
        @c_balance     numeric(12,2),
        @c_discount    numeric(4,4),
        @data          char(500),
        @c_data        char(500),
        @datetime      datetime,
        @w_ytd         numeric(12,2),
        @d_ytd         numeric(12,2),
        @cnt           smallint,
        @val           smallint,
        @screen_data   char(200),
        @d_id_local   tinyint,
        @w_id_local   int,
        @c_id_local   int,
        @delaytime    varchar(30)

-----
-- uniform random delay of 0 - 0.3 second; avg = 0.15
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT @screen_data = ''

-----
-- get customer info and update balances
-----
SELECT @d_street_1 = 'rqSHHakqyV',
        @d_street_2 = 'zZ98nW3BR2s',
        @d_city     = 'ArNr4GNFV9',
        @d_state    = 'aV',
        @d_zip      = '453511111'

-----
-- get warehouse data and update year-to-date
-----
SELECT @w_street_1 = 'rqSHHakqyV',
        @w_street_2 = 'zZ98nW3BR2s',

```

```

@w_city      = 'ArNr4GNFV9',
@w_state     = 'aV',
@w_zip       = '453511111'

SELECT  @c_id          = 123,
        @c_balance    = -10000.00,
        @c_first      = 'KmR03Xureb',
        @c_middle     = 'OE',
        @c_last       = 'BAROUGHTBAR',
        @c_street_1   = 'OpGdOhjv8mR9vNI8V',
        @c_street_2   = 'dzKoCobBqbC3yu',
        @c_city       = 'ZAKZXdc037FQxq',
        @c_state      = 'QA',
        @c_zip        = '700311111',
        @c_phone      = '2967264064528555',
        @c_credit     = 'GC',
        @c_credit_lim = 50000.00,
        @c_discount   = 0.3069,
        @c_since      = GETDATE(),
        @datetime     = GETDATE()

-----
-- return data to client
-----

SELECT  @c_id,
        @c_last,
        @datetime,
        @w_street_1,
        @w_street_2,
        @w_city,
        @w_state,
        @w_zip,
        @d_street_1,
        @d_street_2,
        @d_city,
        @d_state,
        @d_zip,
        @c_first,
        @c_middle,
        @c_street_1,
        @c_street_2,
        @c_city,
        @c_state,
        @c_zip,
        @c_phone,
        @c_since,
        @c_credit,
        @c_credit_lim,
        @c_discount,
        @c_balance,
        @screen_data
GO

CREATE PROCEDURE tpcc_stocklevel
    @w_id      int,
    @d_id      tinyint,
    @threshhold smallint
AS
DECLARE @delaytime  varchar(30)

-----
-- uniform random delay of 0 - 3.6 second; avg = 1.8
-----

```

```

SELECT  @delaytime  = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT  49
GO

CREATE PROCEDURE tpcc_version

AS
DECLARE @version  char(8)

BEGIN
    SELECT  @version = '4.10.000'
    SELECT  @version AS 'Version'
END
GO

CREATE TABLE    order_line_null (
    [ol_i_id] [int] NOT NULL ,
    [ol_supply_w_id] [int] NOT NULL ,
    [ol_delivery_d] [datetime] NOT NULL ,
    [ol_quantity] [smallint] NOT NULL ,
    [ol_amount] [numeric](6, 2) NOT NULL
) ON [PRIMARY]
GO

INSERT INTO order_line_null VALUES ( 101, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 102, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 103, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 104, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 105, 1, GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 106, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 107, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 108, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 109, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 110, 1, GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 111, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 112, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 113, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 114, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 115, 1, GETDATE(), 5, 123.45 )
GO

```

ordstat.sql

```

---
-- File:  ORDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates order status stored procedure
-- Interface Level:  4.20.000
--
SET QUOTED_IDENTIFIER OFF
GO

```

```

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO

CREATE PROCEDURE tpcc_orderstatus
    @w_id      int,
    @d_id      tinyint,
    @c_id      int,
    @c_last    char(16) = ''

AS
DECLARE @c_balance   money,
        @c_first     char(16),
        @c_middle    char(2),
        @o_id        int,
        @o_entry_d   datetime,
        @o_carrier_id smallint,
        @cnt         smallint

BEGIN TRANSACTION o
IF (@c_id = 0)
    BEGIN
        -----
        -- get customer id and info using last name
        -----
        SELECT @cnt = (count(*)+1)/2
        FROM customer WITH (repeatableread)
        WHERE c_last = @c_last AND
              c_w_id = @w_id AND
              c_d_id = @d_id

        SET rowcount @cnt

        SELECT @c_id = c_id,
               @c_balance = c_balance,
               @c_first = c_first,
               @c_last = c_last,
               @c_middle = c_middle
        FROM customer WITH (repeatableread)
        WHERE c_last = @c_last AND
              c_w_id = @w_id AND
              c_d_id = @d_id
        ORDER BY c_w_id, c_d_id, c_last, c_first

        SET rowcount 0
    END
ELSE
    BEGIN
        -----
        -- get customer info if by id
        -----
        SELECT @c_balance = c_balance,
               @c_first = c_first,
               @c_middle = c_middle,
               @c_last = c_last
        FROM customer WITH (repeatableread)
    END

```

```

        WHERE c_id = @c_id AND
              c_d_id = @d_id AND
              c_w_id = @w_id

        SELECT @cnt = @@rowcount
    END

    -----
    -- if no such customer
    -----
    IF (@cnt = 0)
        BEGIN
            RAISERROR('Customer not found',18,1)
            GOTO custnotfound
        END

    -----
    -- get order info
    -----
    SELECT @o_id = o_id,
           @o_entry_d = o_entry_d,
           @o_carrier_id = o_carrier_id
    FROM orders WITH (serializable)
    WHERE o_c_id = @c_id AND
          o_d_id = @d_id AND
          o_w_id = @w_id
    ORDER BY o_id ASC

    -----
    -- select order lines for the current order
    -----
    SELECT ol_supply_w_id,
           ol_i_id,
           ol_quantity,
           ol_amount,
           ol_delivery_d
    FROM order_line WITH (repeatableread)
    WHERE ol_o_id = @o_id AND
          ol_d_id = @d_id AND
          ol_w_id = @w_id

    custnotfound:
    COMMIT TRANSACTION o

    -----
    -- return data to client
    -----
    SELECT @c_id,
           @c_last,
           @c_first,
           @c_middle,
           @o_entry_d,
           @o_carrier_id,
           @c_balance,
           @o_id
    GO

```

payment.sql

```

-- File: PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates payment stored procedure
-- Interface Level: 4.20.000
--
-----  

SET QUOTED_IDENTIFIER OFF
GO  

SET ANSI_NULLS ON
GO  

USE tpcc
GO  

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
    DROP PROCEDURE tpcc_payment
GO  

CREATE PROCEDURE tpcc_payment
    @w_id      int,
    @c_w_id    int,
    @h_amount  smallmoney,
    @d_id      tinyint,
    @c_d_id    tinyint,
    @c_id      int,
    @c_last    char(16) = ""  

AS
DECLARE @w_street_1    char(20),
        @w_street_2    char(20),
        @w_city        char(20),
        @w_state       char(2),
        @w_zip         char(9),
        @w_name        char(10),
        @d_street_1    char(20),
        @d_street_2    char(20),
        @d_city        char(20),
        @d_state       char(2),
        @d_zip         char(9),
        @d_name        char(10),
        @c_first       char(16),
        @c_middle      char(2),
        @c_street_1    char(20),
        @c_street_2    char(20),
        @c_city        char(20),
        @c_state       char(2),
        @c_zip         char(9),
        @c_phone       char(16),
        @c_since       datetime,
        @c_credit      char(2),
        @c_credit_lim money,
        @c_balance     money,
        @c_discount    smallmoney,
        @c_data        char(42),
        @datetime      datetime,
        @w_ytd         money,
        @d_ytd         money,
        @cnt           smallint,
        @val           smallint,

```

```

@screen_data   char(200),
@d_id_local   tinyint,
@w_id_local   int,
@c_id_local   int

SELECT  @screen_data = ""

BEGIN TRANSACTION p
-- get payment date
SELECT  @datetime = GETDATE()

IF (@c_id = 0)
BEGIN
    -- get customer id and info using last name
    SELECT  @cnt   = COUNT(*)
    FROM    customer WITH (repeatableread)
    WHERE   c_last = @c_last AND
            c_w_id = @c_w_id AND
            c_d_id = @c_d_id

    SELECT  @val   = (@cnt + 1) / 2

    SET    rowcount @val

    SELECT  @c_id = c_id
    FROM    customer WITH (repeatableread)
    WHERE   c_last = @c_last AND
            c_w_id = @c_w_id AND
            c_d_id = @c_d_id
    ORDER BY c_last, c_first

    SET    rowcount 0
END

-- get customer info and update balances
UPDATE customer
SET    @c_balance = c_balance - @h_amount,
      @c_payment_cnt = @c_payment_cnt + 1,
      @c_ytd_payment = @c_ytd_payment + @h_amount,
      @c_first = c_first,
      @c_middle = c_middle,
      @c_last = c_last,
      @c_street_1 = c_street_1,
      @c_street_2 = c_street_2,
      @c_city = c_city,
      @c_state = c_state,
      @c_zip = c_zip,
      @c_phone = c_phone,
      @c_credit = c_credit,
      @c_credit_lim = c_credit_lim,
      @c_discount = c_discount,
      @c_since = c_since,
      @c_id_local = c_id
WHERE  c_id = @c_id AND
       c_w_id = @c_w_id AND
       c_d_id = @c_d_id

-- if customer has bad credit get some more info
IF (@c_credit = "BC")
BEGIN
    -- compute new info
    SELECT  @c_data = convert(char(5),@c_id) +

```

```

        convert(char(4),@c_d_id) +
        convert(char(5),@c_w_id) +
        convert(char(4),@d_id) +
        convert(char(5),@w_id) +
        convert(char(19),@h_amount)

-- update customer info
UPDATE customer
SET    c_data      = @c_data + substring(c_data, 1, 458),
       @screen_data = @c_data + substring(c_data, 1, 158)

WHERE   c_id       = @c_id AND
       c_w_id     = @c_w_id AND
       c_d_id     = @c_d_id

END

-- get district data and update year-to-date
UPDATE district
SET    d_ytd      = d_ytd + @h_amount,
       @d_street_1 = d_street_1,
       @d_street_2 = d_street_2,
       @d_city     = d_city,
       @d_state    = d_state,
       @d_zip      = d_zip,
       @d_name     = d_name,
       @d_id_local = d_id
WHERE   d_w_id     = @w_id AND
       d_id       = @d_id

-- get warehouse data and update year-to-date
UPDATE warehouse
SET    w_ytd      = w_ytd + @h_amount,
       @w_street_1 = w_street_1,
       @w_street_2 = w_street_2,
       @w_city     = w_city,
       @w_state    = w_state,
       @w_zip      = w_zip,
       @w_name     = w_name,
       @w_id_local = w_id
WHERE   w_id       = @w_id

-- create history record
INSERT INTO      history VALUES (@c_id_local,
                                 @c_d_id,
                                 @c_w_id,
                                 @d_id_local,
                                 @w_id_local,
                                 @datetime,
                                 @h_amount,
                                 @w_name + ' ' + @d_name)

COMMIT TRANSACTION p

-- return data to client
SELECT @c_id,
       @c_last,
       @datetime,
       @w_street_1,
       @w_street_2,
       @w_city,
       @w_state,
       @w_zip,
       @d_street_1,

```

```

       @d_street_2,
       @d_city,
       @d_state,
       @d_zip,
       @c_first,
       @c_middle,
       @c_street_1,
       @c_street_2,
       @c_city,
       @c_state,
       @c_zip,
       @c_phone,
       @c_since,
       @c_credit,
       @c_credit_lim,
       @c_discount,
       @c_balance,
       @screen_data
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

stocklev.sql

```

-----
-- File: STOCKLEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates stock level stored procedure
-- Interface Level: 4.20.000
--

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
   DROP PROCEDURE tpcc_stocklevel
GO

CREATE PROCEDURE tpcc_stocklevel
   @w_id          int,
   @d_id          tinyint,
   @threshold     smallint
AS
DECLARE @o_id_low  int,
        @o_id_high int
SELECT @o_id_low  = (d_next_o_id - 20),

```

```

        @o_id_high = (d_next_o_id - 1)
FROM   district
WHERE  d_w_id      = @w_id AND
       d_id        = @d_id

SELECT COUNT(DISTINCT(s_i_id))
FROM   stock,
       order_line
WHERE  ol_w_id      = @w_id AND
       ol_d_id      = @d_id and
       ol_o_id      BETWEEN @o_id_low AND
                         @o_id_high AND
       s_w_id        = ol_w_id AND
       s_i_id        = ol_i_id AND
       s_quantity    < @threshold
OPTION(ORDER GROUP)
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

getargs.c

```

// File:          GETARGS.C
//               Microsoft TPC-C Kit Ver. 4.51
//               Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003
// Purpose:       Source file for command line processing

// Includes
#include "tpcc.h"

//=====
// Function name: GetArgsLoader
//=====
void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{
    int           i;
    char  *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int) GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server      = SERVER;
    pargs->user        = USER;
    pargs->password    = PASSWORD;
    pargs->database    = DATABASE;
    pargs->batch        = BATCH;
    pargs->num_warehouses
        pargs->tables_all      = TRUE;
        pargs->stable_item     = FALSE;
        pargs->table_warehouse = FALSE;
        pargs->table_customer  = FALSE;

```

```

pargs->table_orders      = FALSE;
pargs->loader_res_file   = LOADER_RES_FILE;
pargs->log_path           = LOADER_LOG_PATH;
pargs->pack_size          = DEFLDPACKSIZE;
pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
pargs->build_index         = BUILD_INDEX;
pargs->index_order         = INDEX_ORDER;
pargs->index_script_path  = INDEX_SCRIPT_PATH;
pargs->scale_down          = SCALE_DOWN;

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for ( i = 1; i < argc; ++i )
{
    if ( argv[i][0] != '-' && argv[i][0] != '/')
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];

    switch (ptr[1])
    {
        case '?':      /* Fall through */
            GetArgsLoaderUsage();
            break;

        case 'D':
            pargs->database = ptr+2;
            break;

        case 'P':
            pargs->password = ptr+2;
            break;

        case 'S':
            pargs->server = ptr+2;
            break;

        case 'U':
            pargs->user = ptr+2;
            break;

        case 'b':
            pargs->batch = atol(ptr+2);
            break;

        case 'W':
            pargs->num_warehouses = atol(ptr+2);
            break;

        case 's':
            pargs->starting_warehouse = atol(ptr+2);
            break;

        case 't':
            {
                pargs->tables_all = FALSE;
                if (strcmp(ptr+2,"item") == 0)

```

```

TRUE;
    pargs->table_item =
else if (strcmp(ptr+2,"warehouse")
    pargs->table_warehouse =
else if (strcmp(ptr+2,"customer")
    pargs->table_customer =
TRUE;
else if (strcmp(ptr+2,"orders") ==
0)
    pargs->table_orders =
TRUE;
else
{
printf("\nUnrecognized command");
GetArgsLoaderUsage();
exit(1);
}

break;
}

case 'f':
    pargs->loader_res_file = ptr+2;
break;

case 'L':
    pargs->log_path = ptr+2;
break;

case 'p':
    pargs->pack_size = atol(ptr+2);
break;

case 'i':
    pargs->build_index = atol(ptr+2);
break;

case 'o':
    pargs->index_order = atol(ptr+2);
break;

case 'c':
    pargs->scale_down = atol(ptr+2);
break;

case 'd':
    pargs->index_script_path = ptr+2;
break;

default:
GetArgsLoaderUsage();
exit(-1);
break;
}

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
printf("Number of Warehouses is required\n");
}
    }

    pargs->table_item =
else if (strcmp(ptr+2,"warehouse")
    pargs->table_warehouse =
else if (strcmp(ptr+2,"customer")
    pargs->table_customer =
TRUE;
else if (strcmp(ptr+2,"orders") ==
0)
    pargs->table_orders =
TRUE;
else
{
printf("\nUnrecognized command");
GetArgsLoaderUsage();
exit(1);
}

break;
}

case 'f':
    pargs->loader_res_file = ptr+2;
break;

case 'L':
    pargs->log_path = ptr+2;
break;

case 'p':
    pargs->pack_size = atol(ptr+2);
break;

case 'i':
    pargs->build_index = atol(ptr+2);
break;

case 'o':
    pargs->index_order = atol(ptr+2);
break;

case 'c':
    pargs->scale_down = atol(ptr+2);
break;

case 'd':
    pargs->index_script_path = ptr+2;
break;

default:
GetArgsLoaderUsage();
exit(-1);
break;
}

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
printf("Number of Warehouses is required\n");
}
    }

    exit(-2);
}

return;
}

//=====================================================================
// Function name: GetArgsLoaderUsage
//
//=====================================================================

void GetArgsLoaderUsage()
{
#ifdef DEBUG
printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

printf("TPCCLDR:\n\n");
printf("Parameter                                         Default\n");
printf("-----\n");
printf("-W Number of Warehouses to Load                 Required\n");
printf("-S Server                                         %s\n", SERVER);
printf("-U Username                                        %s\n", USER);
printf("-P Password                                         %s\n", PASSWORD);
printf("-D Database                                         %s\n", DATABASE);
printf("-b Batch Size                                       %ld\n", BATCH);
printf("-p TDS packet size                                %ld\n", DEFLDPACKSIZE);
printf("-L Loader BCP Log Path                           %s\n", LOADER_LOG_PATH);
printf("-f Loader Results Output Filename                %s\n", LOADER_RES_FILE);
printf("-s Starting Warehouse                            %ld\n", DEF_STARTING_WAREHOUSE);
printf("-i Build Option (data = 0, data and index = 1) %ld\n", BUILD_INDEX);
printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n", INDEX_ORDER);
printf("-c Build Scaled Database (normal = 0, tiny = 1)  %ld\n", SCALE_DOWN);
printf("-d Index Script Path                            %s\n", INDEX_SCRIPT_PATH);
printf("-t Table to Load                                 all tables\n");
printf("      [item|warehouse|customer|orders]\n");
printf("Notes: \n");
printf("      - the '-t' parameter may be included multiple times to \n");
printf("      specify multiple tables to be loaded \n");
printf("      - 'item' loads ITEM table \n");
printf("      - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n");
printf("      - 'customer' loads CUSTOMER and HISTORY tables \n");
printf("      - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \n");

printf("\nNote: Command line switches are case sensitive.\n");
exit(0);
}

```

random.c

```
//      File:          RANDOM.C
//                                         Microsoft TPC-C Kit Ver. 4.62
//                                         Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2005
//      Purpose: Random number generation routines for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A      16807
#define M     2147483647
#define Q     127773 /* M div A */
#define R      2836 /* M mod A */
#define Thread __declspec(thread)

// Globals
long Thread Seed = 0; /* thread local seed */

/*
 * random -
 *     Implements a GOOD pseudo random number generator. This generator
 *     will/should? run the complete period before repeating.
 *
 * Copied from:
 *     Random Numbers Generators: Good Ones Are Hard to Find.
 *     Communications of the ACM - October 1988 Volume 31 Number 10
 *
 * Machine Dependencies:
 *     long must be 2 ^ 31 - 1 or greater.
 *
 */
/* seed - load the Seed value used in irand and drand. Should be used before
 * first call to irand or drand.
*/

void seed(long val)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n", Seed, val);
#endif

    if (val < 0)
        val = abs(val);

    Seed = val;
}
```

```
/*
 * irand - returns a 32 bit integer pseudo random number with a period of
 *         1 to 2 ^ 32 - 1.
 *
 * parameters:
 *     none.
 *
 * returns:
 *     32 bit integer - defined as long ( see above ). *
 *
 * side effects:
 *     seed get recomputed.
 */
long irand()
{
    register long s; /* copy of seed */
    register long test; /* test flag */
    register long hi; /* tmp value for speed */
    register long lo; /* tmp value for speed */

#ifdef DEBUG
    printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if (test > 0)
        Seed = test;
    else
        Seed = test + M;

    return(Seed);
}

/*
 * drand - returns a double pseudo random number between 0.0 and 1.0.
 * See irand.
*/
double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0);
}

// Function : RandomNumber
//
// Description:
// Long RandomNumber(long lower, long upper)
{
```

```

long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()\r\n", (int) GetCurrentThreadId());
#endif

if ( upper == lower )           /* pgd 08-13-96 perf enhancement */
    return lower;

upper++;

if ( upper <= lower )
    rand_num = upper;
else
    rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96
perf enhancement */

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\r\n",
           (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

return rand_num;
}

#if 0

//Orginal code pgd 08/13/96

long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()\r\n", (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper - lower :
upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\r\n",
           (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

    return rand_num;
}
#endif
//=====

```

```

// Function   : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()\r\n", (int) GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1))+x;

#ifdef DEBUG
    printf("[%ld]DBG: NURand: num = %d\r\n", (int) GetCurrentThreadId(), rand_num);
#endif

    return rand_num;
}

```

strings.c

```

//      File:          STRINGS.C
//                                         Microsoft TPC-C Kit Ver. 4.51
//                                         Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003
//                                         Purpose: Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
// Function name: MakeAddress
//=====
void MakeAddress(char *street_1,
                 char *street_2,
                 char *city,
                 char *state,
                 char *zip)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAddress()\r\n", (int) GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString (2, 2, STATE_LEN, state);
    MakeZipNumberString(9, 9, ZIP_LEN, zip);
}

```

```

#ifndef DEBUG
    printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state: %s,
zip: %s\n",
           (int) GetCurrentThreadId(), street_1, street_2, city,
state, zip);
#endif

    return;
}

//=====
// Function name: LastName
// =====

void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT" , "ABLE" , "PRI" , "PRES",
        "ESE" , "ANTI" , "CALLY" , "ATION" , "EING"
    };

#ifdef DEBUG
    printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
        exit(-1);
    }

#ifdef DEBUG
    printf("[%ld]DBG: LastName: num = [%d] ==> [%d] [%d] \n",
           (int) GetCurrentThreadId(), num, num/100, (num/10)%10,
num%10);
    printf("[%ld]DBG: LastName: String = %s\n", (int) GetCurrentThreadId(),
name);
#endif

    return;
}

```

```

//=====
// Function name: MakeAlphaString
// =====

//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
// -CLLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    str[len] = 0;

    return len;
}

int MakeAlphaStringPadded( int minLen, int maxLen, int padLen, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaStringPadded()\n", (int)
GetCurrentThreadId());
#endif

    len= RandomNumber(minLen, maxLen);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    if (len < padLen)
        memset(str+len, ' ', padLen - len);
    str[padLen] = 0;
}

```

```

        return padLen;
    }

//=====
// Function name: MakeOriginalAlphaString
//=====
int MakeOriginalAlphaString(int x,
                           int y,
                           int z,
                           char *str,
                           int percent)
{
    int len;
    int val;
    int start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int) GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage: %d\n",
               percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if (x < 8)
    {
        printf("MakeOriginalAlphaString: string length must be >= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }
}

#ifdef DEBUG
printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
       (int) GetCurrentThreadId(), str);
#endif

return len;
}

//=====
//
```

```

// Function name: MakeNumberString
//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16, 16,
    string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;
    return 16;
}

//=====
// Function name: MakeZipNumberString
//=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9, 9,
    string)

    strcpy(str, "00001111");
    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
// Function name: InitString
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

//=====
// Function name: InitAddress
//
```

```

// Description:
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

//=====
// Function name: PaddString
//=====

void PaddString(int max, char *name)
{
    int len;

    len = strlen(name);
    if (len < max)
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

time.c

```

// File:          TIME.C
//               Microsoft TPC-C Kit Ver. 4.62
//               Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2005
// Purpose:       Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
// Function name: TimeNow
//=====

```

```

long TimeNow()
{
    long time_now;
    struct _timeb el_time;

#ifndef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

tpcc.h

```

// File:          TPCC.H
//               Microsoft TPC-C Kit Ver. 4.51
//               Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003, 2005
// Purpose:       Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.51"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stargard.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>
#include <math.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"
#define USER "sa"
#define PASSWORD ""


```

```

// Default loader arguments
#define BATCH 10000
#define DEFLDPACKSIZE 32768
#define LOADER_RES_FILE
    "C:\MSTPC.C.450\SETUP\LOGS\load.out"
#define LOADER_LOG_PATH
    "C:\MSTPC.C.450\SETUP\LOGS\" 123
#define LOADER_NURAND_C 1
#define DEF_STARTING_WAREHOUSE 1 // build both
#define BUILD_INDEX 1
data and indexes
#define INDEX_ORDER 1 // build
indexes before load
#define SCALE_DOWN 0 // build a normal
scale database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all;
    // set if loading all tables
    BOOL table_item;
    // set if loading ITEM table specifically
    BOOL table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL table_customer; // set if
set if loading CUSTOMER and HISTORY
    BOOL table_orders; // set if
set if loading NEW-ORDER, ORDERS, ORDER-LINE
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    long *loader_res_file;
    long *log_path;
    long *synch_servername;
    long case_sensitivity;
    long starting_warehouse;
    long build_index;
    long index_order;
    long scale_down;
    char *index_script_path;
} TPCCLDR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9

```

```

#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_DL_NEW_ORDER_ITEMS 15
#define MAX_DL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

```

```

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeAlphaStringPadded();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

```

tpccldr.c

```

===== File: TPCCLDR.C =====
// Microsoft TPC-C Kit Ver. 4.51
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2003
// Purpose: Source file for TPC-C database loader
===== Includes =====
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS 100000

```

```

#define MAXITEMS_SCALE_DOWN          100
#define CUSTOMERS_PER_DISTRICT      3000
#define CUSTOMERS_SCALE_DOWN         30
#define DISTRICT_PER_WAREHOUSE      10
#define ORDERS_PER_DISTRICT         3000
#define ORDERS_SCALE_DOWN           30
#define MAX_CUSTOMER_THREADS        2
#define MAX_ORDER_THREADS            3
#define MAX_MAIN_THREADS             4
#define MAX_SQL_ERRORS               10

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);
long NURand();
void LoadItem();
void LoadWarehouse();
void Stock();
void District();
void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();
void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void CheckForCommit_Big();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures
typedef struct
{
    double ol_i_id;          ol;
    long   ol_supply_w_id;
    short  ol_quantity;
    double ol_amount;
    char   ol_dist_info[DIST_INFO_LEN+1];
    char   ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long   o_id;
    short  o_d_id;
    long   o_c_id;
    short  o_carrier_id;
    short  o.ol_cnt;
    short  o.all_local;
    ORDER_LINE_STRUCT o.ol[15];
} ORDERS_STRUCT;

typedef struct
{

```

```

    long   c_id;
    short  c_d_id;
    long   c_w_id;
    char   c_first[FIRST_NAME_LEN+1];
    char   c_middle[MIDDLE_NAME_LEN+1];
    char   c_last[LAST_NAME_LEN+1];
    char   c_street_1[ADDRESS_LEN+1];
    char   c_street_2[ADDRESS_LEN+1];
    char   c_city[ADDRESS_LEN+1];
    char   c_state[STATE_LEN+1];
    char   c_zip[ZIP_LEN+1];
    char   c_phone[PHONE_LEN+1];
    double c_credit;
    double c_credit_lim;
    double c_discount;
    double c_balance[6];
    double c_ytd_payment;
    double c_payment_cnt;
    double c_delivery_cnt;
    char   c_data[C_DATA_LEN+1];
    double h_amount;
    char   h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char   c_last[LAST_NAME_LEN+1];
    char   c_first[FIRST_NAME_LEN+1];
    long   c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long   time_start;
} LOADER_TIME_STRUCT;

// Global variables
char szLastError[300];

HENV henv;                                // for SQL

HDBC v_hdbc;                             // for ITEM table
Server version verification
HDBC i_hdbc1;                            // for WAREHOUSE,
HDBC w_hdbc1;                            // for STOCK
HDBC c_hdbc1;                            // for CUSTOMER
HDBC c_hdbc2;                            // for HISTORY
HDBC o_hdbc1;                            // for ORDERS
HDBC o_hdbc2;                            // for NEW-ORDER
HDBC o_hdbc3;                            // for ORDER-LINE

HSTMT v_hstmt;                           // for SQL Server
version verification
HSTMT i_hstmt1;
HSTMT w_hstmt1;
HSTMT c_hstmt1, c_hstmt2;
HSTMT o_hstmt1, o_hstmt2, o_hstmt3;

int total_db_errors;

```

```

ORDERS_STRUCT      orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT    customer_buf[CUSTOMERS_PER_DISTRICT];
long               orders_rows_loaded;
double              new_order_rows_loaded;
double              order_line_rows_loaded;
long               history_rows_loaded;
long               customer_rows_loaded;
double              stock_rows_loaded;
long               district_rows_loaded;
long               item_rows_loaded;
long               warehouse_rows_loaded;
long               main_time_start;
long               main_time_end;
long               max_items;
long               customers_per_district;
long               orders_per_district;
long               first_new_order;
long               last_new_order;

TPCCLDR_ARGS      *aptr, args;

//=====
// Function name: main
//=====

int main(int argc, char **argv)
{
    DWORD          dwThreadID[MAX_MAIN_THREADS];
    HANDLE         hThread[MAX_MAIN_THREADS];
    FILE           *fLoader;
    char           buffer[255];
    int            i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****\n");
    printf("  Microsoft SQL Server\n");
    printf("  TPC-C BENCHMARK KIT: Database loader\n");
    printf("  Version %s          *, TPCKIT_VER);\n";
    printf("*****\n");

    // process command line arguments
    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    printf("Build interface is ODBC.\n");

    if (aptr->build_index == 0)
        printf("Data load only - no index creation.\n");
    else
        printf("Data load and index creation.\n");

    if (aptr->index_order == 0)
        printf("Clustered indexes will be created after bulk load.\n");
    else
        printf("Clustered indexes will be created before bulk load.\n");
}

```

```

// set database scale values
if (aptr->scale_down == 1)
{
    printf("**** Scaled Down Database ***\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district = CUSTOMERS_SCALE_DOWN;
    orders_per_district = ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// start loading data
sprintf(buffer, "TPC-C load started for %ld warehouses.\n", aptr->num_warehouses);
if (aptr->scale_down == 1)
{
    sprintf(buffer, "SCALED DOWN DATABASE.\n");
}

printf("%s", buffer);
fprintf(fLoader, "%s", buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads
if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting loader threads for: item\n");

    hThread[0] = CreateThread(NULL,
                               0,
                               (LPTHREAD_START_ROUTINE) LoadItem,
                               NULL,
                               0,
                               &dwThreadID[0]);
}

if (hThread[0] == NULL)
{
    printf("Error, failed in creating creating thread = 0.\n");
}

```

```

        exit(-1);
    }

    if (aptr->tables_all || aptr->table_warehouse)
    {
        fprintf(fLoader, "Starting loader threads for: warehouse\n");
        hThread[1] = CreateThread(NULL,
                                  0,
                                  (LPTHREAD_START_ROUTINE) LoadWarehouse,
                                  NULL,
                                  0,
                                  &dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread = %s.\n");
            exit(-1);
        }
        if (aptr->tables_all || aptr->table_customer)
        {
            fprintf(fLoader, "Starting loader threads for: customer\n");
            hThread[2] = CreateThread(NULL,
                                      0,
                                      (LPTHREAD_START_ROUTINE) LoadCustomer,
                                      NULL,
                                      0,
                                      &dwThreadID[2]);
            if (hThread[2] == NULL)
            {
                printf("Error, failed in creating creating main thread = %s.\n");
                exit(-1);
            }
            if (aptr->tables_all || aptr->table_orders)
            {
                fprintf(fLoader, "Starting loader threads for: orders\n");
                hThread[3] = CreateThread(NULL,
                                          0,
                                          (LPTHREAD_START_ROUTINE) LoadOrders,
                                          NULL,
                                          0,
                                          &dwThreadID[3]);
                if (hThread[3] == NULL)

```

```

        {
            printf("Error, failed in creating creating main thread = %s.\n");
            exit(-1);
        }
        // Wait for threads to finish...
        for (i=0; i<MAX_MAIN_THREADS; i++)
        {
            if (hThread[i] != NULL)
            {
                WaitForSingleObject( hThread[i], INFINITE );
                CloseHandle(hThread[i]);
                hThread[i] = NULL;
            }
        }
        main_time_end = (TimeNow() / MILLI);
        sprintf(buffer,"nTPC-C load completed successfully in %ld minutes.\n",
                (main_time_end - main_time_start)/60);
        printf("%s",buffer);
        fprintf(fLoader, "%s", buffer);

        fclose(fLoader);
        SQLFreeEnv(henv);

        exit(0);
    }
    return 0;
}

//=====================================================================
// Function name: LoadItem
//=====================================================================
void LoadItem()
{
    int          i;
    long         i_id;
    long         i_im_id;
    char         i_name[I_NAME_LEN+1];
    double       i_price;
    char         i_data[I_DATA_LEN+1];
    char         name[20];
    long         time_start;
    RETCODE      rc;
    DBINT        rcint;
    char         bcphint[128];
    char         err_log_path[256];

    // Seed with unique number
    seed(11);

    printf("Loading item table...\n");
    //if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))

```

```

        BuildIndex("idxitmcl");

InitString(i_name, I_NAME_LEN+1);
InitString(i_data, I_DATA_LEN+1);

sprintf(name, "%s..%s", aptr->database, "item");

strcpy(err_log_path,aptr->log_path);
strcat(err_log_path,"item.err");
rc = bcp_init(i_hdbc1, name, NULL, err_log_path , DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (i_id), ROWS_PER_BATCH =
100000");
    rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
}

i = 0;
rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

time_start = (TimeNow() / MILLI);

item_rows_loaded = 0;

for (i_id = 1; i_id <= max_items; i_id++)
{
    i_im_id = RandomNumber(1L, 10000L);

    MakeAlphaStringPadded(14, 24, I_NAME_LEN, i_name);
    i_price = ((float) RandomNumber(100L, 10000L))/100.0;

    MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

    rc = bcp_sendrow(i_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    item_rows_loaded++;
}

```

```

        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
    }

rcint = bcp_done(i_hdbc1);
if (rcint < 0)
    HandleErrorDBC(i_hdbc1);

printf("Finished loading item table.\n");

SQLFreeStmt(i_hstmt1, SQL_DROP);
SQLDisconnect(i_hdbc1);
SQLFreeConnect(i_hdbc1);

// if build index after load
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxitmcl");

}

//=====================================================================
//
// Function      : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are created
//
//=====================================================================
void LoadWarehouse()
{
    int i;
    long w_id;
    char w_name[W_NAME_LEN+1];
    char w_street_1[ADDRESS_LEN+1];
    char w_street_2[ADDRESS_LEN+1];
    char w_city[ADDRESS_LEN+1];
    char w_state[STATE_LEN+1];
    char w_zip[ZIP_LEN+1];
    double w_tax;
    double w_ytd;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcint;
    char bcphint[128];
    char err_log_path[256];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxwarcl");

    InitString(w_name, W_NAME_LEN+1);
    InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

    sprintf(name, "%s..%s", aptr->database, "warehouse");

    strcpy(err_log_path,aptr->log_path);
    strcat(err_log_path,"whouse.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
}

```

```

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (w_id), ROWS_PER_BATCH = %d",
aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    MakeAlphaStringPadded(6,10, W_NAME_LEN, w_name);

    MakeAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

    w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

    w_ytd = 300000.00;

    rc = bcp_sendrow(w_hdbc1);
}

```

```

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

warehouse_rows_loaded++;
CheckForCommit(w_hdbc1, i_hstml, warehouse_rows_loaded,
"warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxwarcl");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();

}

//=====================================================================
// Function : District
//=====================================================================
void District()
{
    int             i;
    short           d_id;
    long            d_w_id;
    char            d_name[D_NAME_LEN+1];
    char            d_street_1[ADDRESS_LEN+1];
    char            d_street_2[ADDRESS_LEN+1];
    char            d_city[ADDRESS_LEN+1];
    char            d_state[STATE_LEN+1];
    char            d_zip[ZIP_LEN+1];
    double          d_tax;
    double          d_ytd;
    char            name[20];
    long            d_next_o_id;
    long            time_start;
    long            w_id;
    RETCODE         rc;
    DBINT          rcint;
    char            bcphint[128];
    char            err_log_path[256];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
}

```

```

sprintf(name, "%s..%s", aptr->database, "district");

strcpy(err_log_path,aptr->log_path);
strcat(err_log_path,"district.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (d_w_id, d_id), ROWS_PER_BATCH
= %u", (aptr->num_warehouses * 10));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

d_ytd = 30000.0;
d_next_o_id = orders_per_district+1;

```

```

time_start = (TimeNow() / MILLI);

for (w_id = aptr->starting_warehouse; w_id <= aptr->num_warehouses,
w_id++)
{
    d_w_id = w_id;

    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        MakeAlphaStringPadded(6,10,D_NAME_LEN, d_name);

        MakeAddress(d_street_1, d_street_2, d_city, d_state,
d_zip);

        d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading district table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxdiscl");

    return;
}

//=====
// Function : Stock
//=====
void Stock()
{
    int i;
    long s_i_id;
    long s_w_id;
    short s_quantity;
    char s_dist_01[S_DIST_LEN+1];
    char s_dist_02[S_DIST_LEN+1];
    char s_dist_03[S_DIST_LEN+1];
    char s_dist_04[S_DIST_LEN+1];
    char s_dist_05[S_DIST_LEN+1];
    char s_dist_06[S_DIST_LEN+1];
    char s_dist_07[S_DIST_LEN+1];
    char s_dist_08[S_DIST_LEN+1];
    char s_dist_09[S_DIST_LEN+1];
    char s_dist_10[S_DIST_LEN+1];
    long s_ytd;
    short s_order_cnt;
    short s_remote_cnt;

```

```

char s_data[S_DATA_LEN+1];
short len;
char name[20];
long time_start;
RETCODE rc;
DBINT rcount;
char bcphint[128];
char err_log_path[256];

// Seed with unique number
seed(3);

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxsttk01");

sprintf(name, "%s.%s", aptr->database, "stock");

strcpy(err_log_path,aptr->log_path);
strcat(err_log_path,"stock.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcpHint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcpHint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

```

```

++i);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;
time_start = (TimeNow() / MILLI);
printf("...Loading stock table\n");
for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (long)aptr->starting_warehouse; s_w_id <= aptr-
>num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
    }
}

```

```

len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);

len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

rc = bcp_sendrow(w_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

stock_rows_loaded++;
CheckForCommit_Big(w_hdbc1, w_hstml1,
stock_rows_loaded, "stock", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading stock table.\n");

SQLFreeStmt(w_hstml1, SQL_DROP);
SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");

return;
}

//=====
// Function : LoadCustomer
//=====
void LoadCustomer()
{
    LOADER_TIME_STRUCT      customer_time_start;
    LOADER_TIME_STRUCT      history_time_start;
    long                     w_id;
    short                   d_id;
    DWORD                   dwThreadId[MAX_CUSTOMER_THREADS];
    HANDLE                  hThread[MAX_CUSTOMER_THREADS];
    char                    name[20];
    RETCODE                 rc;
    raint;
    bcphint[128];
    cmd[256];
    int                     num_procs;
    err_log_path_cust[256];
    err_log_path_hist[256];

    // Seed with unique number
    seed(5);

    printf("Loading customer and history tables...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {

```

```

        BuildIndex("idxcuscl");
        // check the number of processors on this system
        // if 8 or more processors, then build index on History.
        // if less than 8 processors, do not build the index
        num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
        if (num_procs >= 8)
            BuildIndex("idxhiscl");
    }

    // Initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "customer");

    strcpy(err_log_path_cust,aptr->log_path);
    strcat(err_log_path_cust,"customer.err");
    rc = bcp_init(c_hdbc1, name, NULL, err_log_path_cust, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "history");

    rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
    strcpy(err_log_path_hist,aptr->log_path);
    strcat(err_log_path_hist,"history.err");
    rc = bcp_init(c_hdbc2, name, NULL, err_log_path_hist, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    sprintf(bcphint, "tablock");
    rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    customer_rows_loaded = 0;
    history_rows_loaded = 0;

    CustomerBufInit();

    customer_time_start.time_start = (TimeNow() / MILLI);
    history_time_start.time_start = (TimeNow() / MILLI);

    for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
    {
        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {

            CustomerBufLoad(d_id, w_id);

            // Start parallel loading threads here...
            // Start customer table thread
            printf("...Loading customer table for: d_id = %d, w_id
= %d\n", d_id, w_id);
            hThread[0] = CreateThread(NULL,

```

```

0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
0,
&dwThreadID[0]);
if (hThread[0] == NULL)
{
    printf("Error, failed in creating creating
thread = 0.\n");
    exit(-1);
}

// Start History table thread
printf("...Loading history table for: d_id = %d, w_id
= %d\n", d_id, w_id);

hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
0,
&dwThreadID[1]);
if (hThread[1] == NULL)
{
    printf("Error, failed in creating creating
thread = 1.\n");
    exit(-1);
}

WaitForSingleObject( hThread[0], INFINITE );
WaitForSingleObject( hThread[1], INFINITE );

if (CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
}
}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

```

```

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
{
    BuildIndex("idxcuscl");
    // check the number of processors on this system
    // if 8 or more processors, then build index on History.
    // if less than 8 processors, do not build the index
    num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
    if (num_procs >= 8)
        BuildIndex("idxhiscl");
}

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID = 1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "osql -S%s -U%s -P%s -d%s -e -Q\"update customer set c_first
= 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" > %snurand_load.log",
aptr->server,
aptr->user,
aptr->password,
aptr->database,
LOADER_NURAND_C,
aptr->log_path);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
// Function : CustomerBufInit
//=====
void CustomerBufInit()
{
    long i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
    }
}

```

```

strcpy(customer_buf[i].c_last,"");
strcpy(customer_buf[i].c_street_1,"");
strcpy(customer_buf[i].c_street_2,"");
strcpy(customer_buf[i].c_city,"");
strcpy(customer_buf[i].c_state,"");
strcpy(customer_buf[i].c_zip,"");
strcpy(customer_buf[i].c_phone,"");
strcpy(customer_buf[i].c_credit,"");

customer_buf[i].c_credit_lim = 0;
customer_buf[i].c_discount = (float) 0;

strcpy(customer_buf[i].c_balance,"");

customer_buf[i].c_ytd_payment = 0;
customer_buf[i].c_payment_cnt = 0;
customer_buf[i].c_delivery_cnt = 0;

strcpy(customer_buf[i].c_data,"");

customer_buf[i].h_amount = 0;

strcpy(customer_buf[i].h_data,"");
}

//=====
// Function : CustomerBufLoad
// Fills shared buffer for HISTORY and CUSTOMER
//=====
void CustomerBufLoad(int d_id, long w_id)
{
    long i;
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

        MakeAlphaStringPadded(8,16,FIRST_NAME_LEN, c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;
        customer_buf[i].c_ytd_payment = 10.0;
        customer_buf[i].c_payment_cnt = 1;
        customer_buf[i].c_delivery_cnt = 0;
        customer_buf[i].c_id = c[i].c_id;
        strcpy(customer_buf[i].c_first, c[i].c_first);
        strcpy(customer_buf[i].c_last, c[i].c_last);
        customer_buf[i].c_middle[0] = 'O';
        customer_buf[i].c_middle[1] = 'E';
        MakeAddress(customer_buf[i].c_street_1,
                    customer_buf[i].c_street_2,
                    customer_buf[i].c_city,
                    customer_buf[i].c_state,
                    customer_buf[i].c_zip);
        MakeNumberString(16, 16, PHONE_LEN, customer_buf[i].c_phone);

        if (RandomNumber(1L, 100L) > 10)
            customer_buf[i].c_credit[0] = 'G';
        else
            customer_buf[i].c_credit[0] = 'B';
        customer_buf[i].c_credit[1] = 'C';
        customer_buf[i].c_credit_lim = 50000.0;
        customer_buf[i].c_discount = ((float) RandomNumber(0L, 5000L)) /
10000.0;
        strcpy(customer_buf[i].c_balance,"-10.0");
        MakeAlphaStringPadded(300, 500, C_DATA_LEN,
customer_buf[i].c_data);

        // Generate HISTORY data
        MakeAlphaStringPadded(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
    }
}

//=====
// Function : LoadCustomerTable
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    long i;
    long c_id;
    short c_d_id;
    long c_w_id;
    char c_first[FIRST_NAME_LEN+1];
    char c_middle[MIDDLE_NAME_LEN+1];
    char c_last[LAST_NAME_LEN+1];
    char c_street_1[ADDRESS_LEN+1];
    char c_street_2[ADDRESS_LEN+1];
    char c_city[ADDRESS_LEN+1];
    char c_state[STATE_LEN+1];
    char c_zip[ZIP_LEN+1];
    char c_phone[PHONE_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_credit_lim;
    double c_discount;
    char c_balance[6];
    double c_ytd_payment;
    short c_payment_cnt;
    short c_delivery_cnt;
    char c_data[C_DATA_LEN+1];
    char c_since[C_SINCE_LEN+1];
    RETCODE rc;

    i = 0;
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)

```

```

        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, ++i);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, C_DATA_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;

        strcpy(c_first, customer_buf[i].c_first);
        strcpy(c_middle, customer_buf[i].c_middle);
        strcpy(c_last, customer_buf[i].c_last);
        strcpy(c_street_1, customer_buf[i].c_street_1);
        strcpy(c_street_2, customer_buf[i].c_street_2);
        strcpy(c_city, customer_buf[i].c_city);
        strcpy(c_state, customer_buf[i].c_state);
        strcpy(c_zip, customer_buf[i].c_zip);
        strcpy(c_phone, customer_buf[i].c_phone);
        strcpy(c_credit, customer_buf[i].c_credit);

        FormatDate(&c_since);

        c_credit_lim = customer_buf[i].c_credit_lim;
        c_discount = customer_buf[i].c_discount;
        strcpy(c_balance, customer_buf[i].c_balance);
        c_ytd_payment = customer_buf[i].c_ytd_payment;
        c_payment_cnt = customer_buf[i].c_payment_cnt;
        c_delivery_cnt = customer_buf[i].c_delivery_cnt;
        strcpy(c_data, customer_buf[i].c_data);

        // Send data to server
        rc = bcp_sendrow(c_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        customer_rows_loaded++;
        CheckForCommit(c_hdbc1, c_hstml, customer_rows_loaded,
"customer", &customer_time_start->time_start);
    }

//=====
// Function : LoadHistoryTable
//=====
void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    long i;
    long c_id;
    short c_d_id;
    long h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

```

```

        i = 0;
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        for (i = 0; i < customers_per_district; i++)
        {
            c_id = customer_buf[i].c_id;
            c_d_id = customer_buf[i].c_d_id;
            c_w_id = customer_buf[i].c_w_id;
            h_amount = customer_buf[i].h_amount;
            strcpy(h_data, customer_buf[i].h_data);

            FormatDate(&h_date);

            // send to server
            rc = bcp_sendrow(c_hdbc2);
            if (rc != SUCCEED)
                HandleErrorDBC(c_hdbc2);

            history_rows_loaded++;
            CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
        }
    }

//=====
// Function      : LoadOrders
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT    orders_time_start;

```

```

    LOADER_TIME_STRUCT    new_order_time_start;
    LOADER_TIME_STRUCT    order_line_time_start;
    long                  w_id;
    short                 d_id;
    DWORD                dwThreadID[MAX_ORDER_THREADS];
    HANDLE               hThread[MAX_ORDER_THREADS];
    char                 name[20];
    RETCODE              rc;
    bcphint[128];
    err_log_path_ord[256];
    err_log_path_nord[256];
    err_log_path_ordl[256];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordcl");
        BuildIndex("idxnodcl");
        BuildIndex("idxodcl");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    strcpy(err_log_path_ord, aptr->log_path);
    strcat(err_log_path_ord, "orders.err");
    rc = bcp_init(o_hdbc1, name, NULL, err_log_path_ord, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 3000));
        rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "new_order");

    rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
    strcpy(err_log_path_nord, aptr->log_path);
    strcat(err_log_path_nord, "neword.err");
    rc = bcp_init(o_hdbc2, name, NULL, err_log_path_nord, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (no_w_id, no_d_id, no_o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
        rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);
    }
}

```

```

sprintf(name, "%s..%s", aptr->database, "order_line");

rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
strcpy(err_log_path_ordl,aptr->log_path);
strcat(err_log_path_ordl,"ordline.err");
rc = bcp_init(o_hdbc3, name, NULL, err_log_path_ordl, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id, ol_o_id,
ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 300000));
    rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

orders_rows_loaded      = 0;
new_order_rows_loaded   = 0;
order_line_rows_loaded  = 0;

OrdersBufInit();

orders_time_start.time_start = (TimeNow() / MILLI);
new_order_time_start.time_start = (TimeNow() / MILLI);
order_line_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        OrdersBufLoad(d_id, w_id);

        // start parallel loading threads here...
        // start Orders table thread
        printf("...Loading Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadOrdersTable,
        &orders_time_start,
        0,
        &dwThreadID[0]);
    }

    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating
thread = 0.\n");
        exit(-1);
    }

    // start NewOrder table thread
    printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);
}

```

```

hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadNewOrderTable,
&new_order_time_start,
0,
&dwThreadID[1]);
if (hThread[1] == NULL)
{
    printf("Error, failed in creating creating
thread = 1.\n");
    exit(-1);
}

// start Order-Line table thread
printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadID[2]);
if (hThread[2] == NULL)
{
    printf("Error, failed in creating creating
thread = 2.\n");
    exit(-1);
}

WaitForSingleObject( hThread[0], INFINITE );
WaitForSingleObject( hThread[1], INFINITE );
WaitForSingleObject( hThread[2], INFINITE );

if (CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[2]) == FALSE)
{
    printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
}

```

```

        }

    }

    printf("Finished loading orders.\n");

    return;
}

//=====
// Function : OrdersBufInit
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//=====
void OrdersBufInit()
{
    int i;
    int j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o.ol_cnt = 0;
        orders_buf[i].o.all_local = 0;

        for (j=0;j<=14;j++)
        {
            orders_buf[i].o.ol[j].ol = 0;
            orders_buf[i].o.ol[j].ol_i_id = 0;
            orders_buf[i].o.ol[j].ol_supply_w_id = 0;
            orders_buf[i].o.ol[j].ol_quantity = 0;
            orders_buf[i].o.ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o.ol[j].ol_dist_info, "");
        }
    }
}

//=====
// Function : OrdersBufLoad
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//=====
void OrdersBufLoad(short d_id, long w_id)
{
    int cust[ORDERS_PER_DISTRICT+1];
    long o_id;
    long ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for (o_id=0;o_id<orders_per_district;o_id++)

```

```

    {

        // Generate ORDER and NEW-ORDER data
        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
        orders_buf[o_id].o_c_id = cust[o_id+1];
        orders_buf[o_id].o.ol_cnt = (short)RandomNumber(5L, 15L);

        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_carrier_id =
            (short)RandomNumber(1L, 10L);
            orders_buf[o_id].o.all_local = 1;
        }
        else
        {
            orders_buf[o_id].o_carrier_id = 0;
            orders_buf[o_id].o.all_local = 1;
        }

        for (ol=0; ol<orders_buf[o_id].o.ol_cnt; ol++)
        {
            orders_buf[o_id].o.ol[ol].ol = ol+1;
            orders_buf[o_id].o.ol[ol].ol_i_id = RandomNumber(1L,
max_items);
            orders_buf[o_id].o.ol[ol].ol_supply_w_id = w_id;
            orders_buf[o_id].o.ol[ol].ol_quantity = 5;
            MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o.ol[ol].ol_dist_info);

            // Generate ORDER-LINE data
            if (o_id < first_new_order)
            {
                orders_buf[o_id].o.ol[ol].ol_amount = 0;
                // Added to insure ol_delivery_d set
                // properly during load
                FormatDate(&orders_buf[o_id].o.ol[ol].ol_delivery_d);
            }
            else
            {
                orders_buf[o_id].o.ol[ol].ol_amount =
                RandomNumber(1,999999)/100.0;
                // Added to insure ol_delivery_d set
                // properly during load
                // odbc datetime format
                strcpy(orders_buf[o_id].o.ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
            }
        }
    }
}

//=====
// Function : LoadOrdersTable
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int i;

```

```

long      o_id;
short     o_d_id;
long      o_w_id;
long      o_c_id;
short     o_carrier_id;
short     o.ol_cnt;
short     o.all_local;
char      o_entry_d[O_ENTRY_D_LEN+1];
RETCODE   rc;
DBINT    rcint;

// bind ORDER data
i = 0;
rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o.ol_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = bcp_bind(o_hdbc1, (BYTE *) &o.all_local, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

for (i = 0; i < orders_per_district; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;
    o_c_id    = orders_buf[i].o_c_id;
    o_carrier_id = orders_buf[i].o_carrier_id;
    o.ol_cnt  = orders_buf[i].o.ol_cnt;
    o.all_local = orders_buf[i].o.all_local;

    FormatDate(&o_entry_d);

    // send data to server
    rc = bcp_sendrow(o_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
}

```

```

orders_rows_loaded++;
CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded, "orders",
&orders_time_start->time_start);
}

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxordcl");

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxordnc");
}

//=====
// Function : LoadNewOrderTable
//=====
void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    long      o_id;           i;
    short     o_d_id;
    long      o_w_id;
    RETCODE   rc;
    DBINT    rcint;

    // Bind NEW-ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);
    }
}

```

```

        new_order_rows_loaded++;
        CheckForCommit_Big(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
    }

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxnodcl");
    }

//=====
// Function : LoadOrderLineTable
//=====
void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    long          i;
    long          j;
    long          o_id;
    short         o_d_id;
    long          o_w_id;
    double        ol;
    long          ol_i_id;
    long          ol_supply_w_id;
    short         ol_quantity;
    double        ol_amount;
    char          ol_dist_info[DIST_INFO_LEN+1];
    char          ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE       rc;
    DBINT         rcint;

    // bind ORDER-LINE data
    i = 0;
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

```

```

        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0, OL_DELIVERY_D_LEN,
NULL, 0, SQLCHARACTER, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        for (i = 0; i < orders_per_district; i++)
        {
            o_id      = orders_buf[i].o_id;
            o_d_id    = orders_buf[i].o_d_id;
            o_w_id    = orders_buf[i].o_w_id;

            for (j=0; j < orders_buf[i].o.ol_cnt; j++)
            {
                ol           = orders_buf[i].o.ol[j].ol;
                ol_i_id     = orders_buf[i].o.ol[j].ol_i_id;
                ol_supply_w_id = orders_buf[i].o.ol[j].ol_supply_w_id;
                ol_quantity   = orders_buf[i].o.ol[j].ol_quantity;
                ol_amount     = orders_buf[i].o.ol[j].ol_amount;

                strcpy(ol_delivery_d,orders_buf[i].o.ol[j].ol_delivery_d);

                strcpy(ol_dist_info,orders_buf[i].o.ol[j].ol_dist_info);

                rc = bcp_sendrow(o_hdbc3);
                if (rc != SUCCEED)
                    HandleErrorDBC(o_hdbc3);

                order_line_rows_loaded++;

                CheckForCommit_Big(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
            }
        }

        if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
        {
            rcint = bcp_done(o_hdbc3);
            if (rcint < 0)
                HandleErrorDBC(o_hdbc3);

            SQLFreeStmt(o_hstmt3, SQL_DROP);
        }
    }
}

```

```

SQLDisconnect(o_hdbc3);
SQLFreeConnect(o_hdbc3);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxodlcl");
}

//=====
// Function : GetPermutation
//
//=====
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
// Function : CheckForCommit
//
//=====
void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    long rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long time_end, time_diff;

    if ( !(rows_loaded % aptr->batch) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d (%.2f
rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff
: 1L));
    }

    *time_start = time_end;
}

return;
}

```

```

//=====
// Function : CheckForCommit_Big
//
//=====
void CheckForCommit_Big(HDBC hdbc,
                        HSTMT hstmt,
                        double rows_loaded,
                        char *table_name,
                        long *time_start)
{
    long time_end, time_diff;

    if ( !(fmod(rows_loaded,aptr->batch) ) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %.0f
(.2f rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff
: 1L));

        *time_start = time_end;
    }

    return;
}

//=====
// Function : OpenConnections
//
//=====
void OpenConnections()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

```

```

SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER);
SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER);
SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER);
SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER);
SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER);
SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER);
SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER);

// Open connections to SQL Server
// Connection 1
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = SQLDriverConnect ( i_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(i_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 2
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = SQLDriverConnect ( w_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(w_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 3
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = SQLDriverConnect ( c_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 4
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)

```

```

        HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
                      NULL,
                      (SQLCHAR*)&szDriverString[0] ,
                      SQL_NTS,
                      sizeof(szDriverStringOut),
                      &cbDriverStringOut,
                      SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 5
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
                      NULL,
                      (SQLCHAR*)&szDriverString[0] ,
                      SQL_NTS,
                      sizeof(szDriverStringOut),
                      &cbDriverStringOut,
                      SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 6
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
                      NULL,
                      (SQLCHAR*)&szDriverString[0] ,
                      SQL_NTS,
                      sizeof(szDriverStringOut),
                      &cbDriverStringOut,
                      SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 7
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
                      NULL,
                      (SQLCHAR*)&szDriverString[0] ,
                      SQL_NTS,
                      sizeof(szDriverStringOut),
                      &cbDriverStringOut,
                      SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc3);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

//=====================================================================
//=====
// Function name: BuildIndex

```

```

//=====
void BuildIndex(char *index_script)
{
    char cmd[256];

    printf("Starting index creation: %s\n", index_script);

    sprintf(cmd, "osql -S%s -U%s -P%s -e -i%s\\%s.sql > %s%s.log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->index_script_path,
            index_script,
            aptr->log_path,
            index_script);

    system(cmd);

    printf("Finished index creation: %s\n", index_script);
}

//=====
// Function name: HandleErrorDBC
//=====
void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR     SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN      NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN   rc2;
    char        timebuf[128];
    char        datebuf[128];
    char        err_log_path[256];
    FILE        *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
    &NativeError,
                           Msg, sizeof(Msg) , &MsgLen ) ) !=
SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );

        _strftime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n==>SQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState );

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
            fclose(fp1);
    }
}

```

```

    }

    i++;
}

//=====
// Function : HandleErrorSTMT
//=====
void HandleErrorSTMT (HSTMT hstmt1)
{
    SQLCHAR     SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN      NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN   rc2;
    char        timebuf[128];
    char        datebuf[128];
    char        err_log_path[256];
    FILE        *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
&NativeError,
                           Msg, sizeof(Msg) , &MsgLen ) ) !=
SQL_NO_DATA )
    {
        if (total_db_errors >= MAX_SQL_ERRORS)
        {
            printf(">>> Maximum SQL errors of %d exceeded.
Terminating TPCCCLDR.<<<\n",total_db_errors);
            exit(9);
        }
        total_db_errors++;

        sprintf( szLastError , "%s" , Msg );

        _strftime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\nSQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState );

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
            fclose(fp1);
        }
        i++;
    }
}

//=====
// Function : FormatDate

```

```
//  
//=====  
void FormatDate ( char* szTimeCOutput )  
{  
    struct tm when;  
    time_t now;  
  
    time( &now );  
    when = *localtime( &now );  
  
    mktime( &when );  
  
    // odbc datetime format  
    strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000" , &when );  
  
    return;  
}
```

Appendix C: Tunable Parameters

Microsoft SQL Server 2003 Installation Procedures

Microsoft SQL Server 2005 Enterprise (x64) Edition
 Installation Procedures
 Type of installation: custom
 During the custom installation, use the default
 Settings for all except the following two areas:
 Services accounts:
 SQL Server - local system account
 SQL Server Agent - local system account
 Set the sort order/collation as Latin1_General / BIN

Microsoft SQL Server Configuration Parameters

```
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11> 12> -----
-----
-- File: VERSION.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
-- Copyright Microsoft, 2005
-- 
-- Extracts current version of SQL Server
-- 
-----
```

```
USE master
1> 2> 3> 4> 5>
```

```
SELECT CONVERT(char(20),
  SERVERPROPERTY('ProductVersion')),
  CONVERT(char(20),
  SERVERPROPERTY('ProductLevel')),
  CONVERT(char(29), SERVERPROPERTY('Edition'))
-----
9.00.2047.00      SP1          Enterprise
Edition (64-bit)
(1 row affected)
1> 2> 3>
SELECT CONVERT(char(30), GETDATE(), 21)
-----
2006-09-14 20:08:52.403
(1 row affected)
1>
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11> 12> 13> 14>
-----
-- 
-- File: CONFIG.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
-- Copyright Microsoft, 2005
-- 
-- - Collects SQL Server configuration
parameters      --
-- 
-----
```

```
PRINT ''
SELECT CONVERT(char(30), GETDATE(), 21)
PRINT ''
```

```
2006-09-14 20:08:52.590
(1 row affected)
1> 2> 3> Configuration option 'show advanced options' changed from 1 to 1. Run the RECONFIGURE statement to install.
sp_configure 'show advanced',1
1> 2> 3>
RECONFIGURE WITH OVERRIDE
1> 2> 3>
sp_configure
  name                           minimum
maximum        config_value run_value
```

```
-----
```

Ad Hoc Distributed Queries		
1	0	0
affinity I/O mask	0	-2147483648
2147483647	0	0
affinity mask	255	255
2147483647	255	-2147483648
affinity64 I/O mask	0	0
2147483647	0	-2147483648
affinity64 mask	0	0
2147483647	0	-2147483648
Agent XPs	0	0
1	0	0
allow updates	0	0
1	0	0
awe enabled	0	0
1	0	0
blocked process threshold	0	0
86400	0	0
c2 audit mode	0	0
1	0	0
clr enabled	0	0
1	0	0
cost threshold for parallelism	5	5
32767	5	5
cross db ownership chaining	0	0
1	0	0
cursor threshold	0	-1
2147483647	-1	-1
Database Mail XPs	0	0
1	0	0
default full-text language	1033	1033
2147483647	1033	0
default language	0	0
9999	0	0
default trace enabled	0	0
1	0	0
Disallow results from triggers	0	0
1	0	0
fill factor (%)	0	0
100	0	0
ft crawl bandwidth (max)	100	0
32767	100	100
ft crawl bandwidth (min)	0	0
32767	0	0
ft notify bandwidth (max)	0	0
32767	100	100
ft notify bandwidth (min)	0	0
32767	0	0
in-doubt xact resolution	0	0
2	0	0
index create memory (KB)	704	704
2147483647	704	704
lightweight pooling	0	0
1	1	1
locks	0	5000
2147483647	0	0
max degree of parallelism	0	0
64	1	1

max full-text crawl range	4	4	0
256	4	4	0
max server memory (MB)	126600	126600	16
2147483647	126600	126600	0
max text repl size (B)			0
2147483647	65536	65536	0
max worker threads			128
32767	800	800	128
media retention	0	0	0
365	0	0	0
min memory per query (KB)			512
2147483647	512	512	512
min server memory (MB)			0
2147483647	0	0	0
nested triggers			0
1	1	1	0
network packet size (B)			512
32767	2048	2048	512
Ole Automation Procedures			0
1	0	0	0
open objects			0
2147483647	0	0	0
PH timeout (s)			1
3600	60	60	1
precompute rank			0
1	0	0	0
priority boost			0
1	1	1	0
query governor cost limit			0
2147483647	0	0	0
query wait (s)			-1
2147483647	-1	-1	-1
recovery interval (min)			0
32767	32767	32767	0
remote access			0
1	1	1	0
remote admin connections			0
1	0	0	0
remote login timeout (s)			0
2147483647	20	20	0
remote proc trans			0
1	0	0	0
remote query timeout (s)			0
2147483647	600	600	0
Replication XPs			0
1	0	0	0
scan for startup procs			0
1	0	0	0
server trigger recursion			0
1	1	1	0
set working set size			0
1	0	0	0
show advanced options			0
1	1	1	0
SMO and DMO XPs			0
1	1	1	0
SQL Mail XPs			0
1	0	0	0
transform noise words			0
1	0	0	0

two digit year cutoff	2049	2049	1753
9999	2049	2049	0
user connections			0
32767	0	0	0
user options			0
32767	0	0	0
Web Assistant Procedures			0
1	0	0	0
xp_cmdshell			0
1	0	0	0
1>			0

Microsoft SQL Server Node Configuration Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration
Class Name: <NO CLASS>
Last Write Time: 6/9/2006 - 4:04 PM

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node0
Class Name: <NO CLASS>
Last Write Time: 6/9/2006 - 4:03 PM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0x3

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node1
Class Name: <NO CLASS>
Last Write Time: 6/9/2006 - 4:03 PM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xc

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node2
Class Name: <NO CLASS>
Last Write Time: 6/9/2006 - 4:04 PM
Value 0
Name: CPUMask
Type: REG_DWORD

Data:	0x30
Key Name:	HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node3
Class Name:	<NO CLASS>
Last Write Time:	6/9/2006 - 4:04 PM
Value 0	
Name:	CPUMask
Type:	REG_DWORD
Data:	0xc0

Microsoft SQL Server Super Socket Configuration Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp
Class Name: <NO CLASS>
Last Write Time: 6/9/2006 - 4:11 PM
Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: ListenOnAllIPs
Type: REG_DWORD
Data: 0x1

Value 2
Name: NoDelay
Type: REG_DWORD
Data: 0

Value 3
Name: KeepAlive
Type: REG_DWORD
Data: 0x7530

Value 4
Name: DisplayName
Type: REG_SZ
Data: TCP/IP

<p>Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP1 Class Name: <NO CLASS> Last Write Time: 9/13/2006 - 2:01 PM</p> <p>Value 0 Name: Enabled Type: REG_DWORD Data: 0x1</p> <p>Value 1 Name: Active Type: REG_DWORD Data: 0x1</p> <p>Value 2 Name: TcpPort Type: REG_SZ Data: 2001</p> <p>Value 3 Name: TcpDynamicPorts Type: REG_SZ Data:</p> <p>Value 4 Name: DisplayName Type: REG_SZ Data: Specific IP Address</p> <p>Value 5 Name: IpAddress Type: REG_SZ Data: 130.168.208.50</p> <p>Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP2 Class Name: <NO CLASS> Last Write Time: 9/13/2006 - 2:01 PM</p> <p>Value 0 Name: Enabled Type: REG_DWORD Data: 0x1</p> <p>Value 1 Name: DisplayName Type: REG_SZ Data: Specific IP Address</p> <p>Value 2 Name: Enabled Type: REG_DWORD Data: 0x1</p> <p>Value 3 Name: IPAddress Type: REG_SZ Data: 130.121.208.50</p> <p>Value 4 Name: TcpDynamicPorts Type: REG_SZ Data:</p> <p>Value 5 Name: TcpPort Type: REG_SZ Data: 2003</p> <p>Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP4 Class Name: <NO CLASS> Last Write Time: 9/13/2006 - 2:01 PM</p> <p>Value 0 Name: Active Type: REG_DWORD Data: 0x1</p> <p>Value 1 Name: TcpPort Type: REG_SZ Data: 2002</p> <p>Value 2 Name: TcpDynamicPorts Type: REG_SZ Data:</p> <p>Value 3 Name: DisplayName Type: REG_SZ Data: Specific IP Address</p>	<p>Value 4 Name: DisplayName Type: REG_SZ Data: Specific IP Address</p> <p>Value 5 Name: IpAddress Type: REG_SZ Data: 130.120.208.50</p> <p>Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP3 Class Name: <NO CLASS> Last Write Time: 9/13/2006 - 2:01 PM</p> <p>Value 0 Name: Active Type: REG_DWORD Data: 0x1</p> <p>Value 1 Name: DisplayName Type: REG_SZ Data: Specific IP Address</p> <p>Value 2 Name: Enabled Type: REG_DWORD Data: 0x1</p> <p>Value 3 Name: IPAddress Type: REG_SZ Data: 130.122.208.50</p> <p>Value 4 Name: TcpDynamicPorts Type: REG_SZ Data:</p> <p>Value 5 Name: TcpPort Type: REG_SZ Data: 2004</p> <p>Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP5 Class Name: <NO CLASS> Last Write Time: 9/13/2006 - 2:01 PM</p> <p>Value 0 Name: Enabled Type: REG_DWORD Data: 0x1</p> <p>Value 1 Name: Active Type: REG_DWORD Data: 0x1</p> <p>Value 2 Name: TcpPort Type: REG_SZ Data: 1433</p> <p>Value 3 Name: TcpDynamicPorts Type: REG_SZ Data:</p> <p>Value 4 Name: DisplayName Type: REG_SZ Data: Specific IP Address</p> <p>Value 5 Name: IPAddress Type: REG_SZ Data: 127.0.0.1</p> <p>Key Name: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL</p>	
---	--	--

```

Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IPAL
1
Class Name: <NO CLASS>
Last Write Time: 6/9/2006 - 4:14 PM
Value 0
  Name: TcpPort
  Type: REG_SZ
  Data:
2001[0x1],2002[0x2],2003[0x4],2004[0x8]

Value 1
  Name: TcpDynamicPorts
  Type: REG_SZ
  Data:

Value 2
  Name: DisplayName
  Type: REG_SZ
  Data: Any IP Address

```

Database Server System Configuration

System Information report written at: 09/18/06
14:14:20
System Name: LONGSHOT
[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003 Enterprise x64 Edition
Version	5.2.3790 Service Pack 1 Build 3790
Other OS Description	Not Available
OS Manufacturer	Microsoft Corporation
System Name	LONGSHOT
System Manufacturer	HP
System Model	ProLiant DL585 G2
System Type	x64-based PC
Processor	AMD64 Family 15 Model 65 Stepping 2
AuthenticAMD	~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2
AuthenticAMD	~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2
AuthenticAMD	~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2
AuthenticAMD	~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2
AuthenticAMD	~2813 Mhz
Processor	AMD64 Family 15 Model 65 Stepping 2
AuthenticAMD	~2813 Mhz

Processor AMD64 Family 15 Model 65 Stepping 2
AuthenticAMD ~2813 Mhz
BIOS Version/Date HP A07, Not Available
SMBIOS Version 2.3
Windows Directory C:\WINDOWS
System Directory C:\WINDOWS\system32
Boot Device \Device\HarddiskVolume28
Locale United States
Hardware Abstraction Layer Version = "5.2.3790.1830 (srv03_spl_rtm.050324-1447)"
User Name Not Available
Time Zone Central Daylight Time
Total Physical Memory 131,071.06 MB
Available Physical Memory 124.81 GB
Total Virtual Memory 127.11 GB
Available Virtual Memory 126.85 GB
Page File Space 2.00 GB
Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource	Device	
I/O Port	0x0000A000-0x0000AFFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x0000A000-0x0000AFFF	Smart Array
P800 Controller		
I/O Port	0x00000000-0x000003AF	PCI bus
I/O Port	0x00000000-0x000003AF	Direct memory access controller
I/O Port	0x000003C0-0x000003DF	PCI bus
I/O Port	0x000003C0-0x000003DF	ATI ES1000
Memory Address	0xE8000000-0xF7FFFFFF	PCI bus
Memory Address	0xE8000000-0xF7FFFFFF	ATI ES1000
I/O Port	0x00009000-0x00009FFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x00009000-0x00009FFF	Smart Array
P800 Controller		
I/O Port	0x00006000-0x00006FFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x00006000-0x00006FFF	Smart Array
BUMPERLITE Controller		
Memory Address	0x80000000-0x83FFFFFF	PCI bus
Memory Address	0x80000000-0x83FFFFFF	Motherboard resources
I/O Port	0x0000B000-0x0000BFFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x0000B000-0x0000BFFF	Smart Array
P800 Controller		

IRQ 16	HP ProLiant iLO 2 Management Controller	
Driver	Smart Array BUMPERLITE Controller	
IRQ 16		
I/O Port	0x00005000-0x00005FFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x00005000-0x00005FFF	Smart Array
P800 Controller		
IRQ 18	ATI ES1000	
IRQ 18	Smart Array P800 Controller	
Memory Address	0xA0000-0xBFFFF	PCI bus
Memory Address	0xA0000-0xBFFFF	ATI ES1000
Memory Address	0xF8000000-0xFBFFFFFF	PCI standard
PCI-to-PCI bridge		
Memory Address	0xF8000000-0xFBFFFFFF	HP NC371i
Virtual Bus Device		
I/O Port	0x00007000-0x0000FFFF	PCI bus
I/O Port	0x00007000-0x0000FFFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x00007000-0x0000FFFF	Smart Array
P600 Controller		
I/O Port	0x00001000-0x00006FFF	PCI bus
I/O Port	0x00001000-0x00006FFF	Standard Dual Channel PCI IDE Controller
I/O Port	0x00003B0-0x00003BB	PCI bus
I/O Port	0x00003B0-0x00003BB	ATI ES1000
I/O Port	0x00004000-0x00004FFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x00004000-0x00004FFF	Smart Array
P800 Controller		
I/O Port	0x00008000-0x00008FFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x00008000-0x00008FFF	Smart Array
P800 Controller		
[DMA]		
Resource	Device	Status
Channel 7	Direct memory access controller	OK
Channel 2	Standard floppy disk controller	OK
[Forced Hardware]		
Device	PNP Device ID	
[I/O]		

0xA0000-0xBFFFF PCI bus OK	PCI standard PCI-to-PCI	c:\windows\system32\msgsm32.acm Microsoft Corporation msgsm32.acm OK
0xA0000-0xBFFF ATI ES1000 OK	bridge OK	C:\WINDOWS\system32\MSGSM32.ACM 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 34.50 KB (35,328 bytes) 3/25/2005
0x80000000-0x83FFFFFF PCI bus OK	Smart Array P800	6:00 AM
0x80000000-0x83FFFFFF Motherboard resources OK	Controller OK	c:\windows\system32\msg711.acm Microsoft Corporation msg711.acm OK
0xE8000000-0xF7EFFFF PCI bus OK	Smart Array P800	C:\WINDOWS\system32\MSG711.ACML 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 13.50 KB (13,824 bytes) 3/25/2005
0xE8000000-0xF7EFFFF ATI ES1000 OK	Controller OK	6:00 AM
0xFED00000-0xFED003FF High precision event timer OK	PCI standard PCI-to-PCI	[Video Codecs]
0xF76E0000-0x7F76E0FFF Standard OpenHCD USB Host Controller OK	bridge OK	CODEC Manufacturer Description
0xF76D0000-0xF76D00FF Standard Enhanced PCI to USB Host Controller	Controller OK	Status File Version Size
0xF78F0000-0xF78FFFF ATI ES1000 OK	0xFD800000-0xFD9FFFFF	c:\windows\system32\iyuv_32.dll Microsoft Corporation iyuv_32.dll OK
0xF78E0000-0xF78E01FF HP ProLiant iLO 2 Legacy Support Function	bridge OK	C:\WINDOWS\system32\IYUV_32.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 52.50 KB (53,760 bytes) 3/24/2005
0xF78D0000-0xF78D07FF Base System Device OK	Device OK	11:19 AM
0xF78C0000-0xF78C1FFF Base System Device OK	0xFA000000-0xFBFFFFFF	c:\windows\system32\msrle32.dll Microsoft Corporation msrle32.dll OK
0xF7800000-0xF787FFFF Base System Device OK	bridge OK	C:\WINDOWS\system32\MSRLE32.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 15.50 KB (15,872 bytes) 3/25/2005
0xF77F0000-0xF77F00FF HP ProLiant iLO 2 Management Controller Driver	PCI standard PCI-to-PCI	6:00 AM
0xF7D00000-0xF7EFFFFFF bridge OK	bridge OK	c:\windows\system32\msvidc32.dll Microsoft Corporation msvidc32.dll OK
0xF7E00000-0xF7EFFFFF Smart Array BUMPERLITE Controller OK	0xFD700000-0xFD7FFFFF	C:\WINDOWS\system32\MSVIDC32.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 43.00 KB (44,032 bytes) 3/25/2005
0xF7DF0000-0xF7DP0FFF Smart Array BUMPERLITE Controller OK	interrupt controller	6:00 AM
0xF7B00000-0xF7CFFFFF PCI standard PCI-to-PCI bridge OK	0xF7FE0000-0x7FE0FFF	c:\windows\system32\msyuv.dll Microsoft Corporation msyuv.dll OK
0xF7C00000-0xF7CFFFFF Smart Array P800 Controller OK	interrupt controller	C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 21.00 KB (21,504 bytes) 3/24/2005
0xF7BF0000-0xF7BF0FFF Smart Array P800 Controller OK	0xF7FF0000-0x7FF0FFF	11:21 AM
0xF79F0000-0xF79F0FFF PCI standard PCI-to-PCI bridge OK	interrupt controller	c:\windows\system32\tsbyuv.dll Microsoft Corporation tsbyuv.dll OK
0xF76F0000-0xF76F0FFF Advanced programmable Controller OK	Smart Array P800	C:\WINDOWS\system32\TSBYUV.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 12.50 KB (12,800 bytes) 3/24/2005
0x84000000-0x8FFFFFF PCI bus OK	Smart Array P800	11:34 AM
0xF7F00000-0xF7FFFFFF PCI bus OK	Smart Array P800	[CD-ROM]
0xFDE00000-0xFDDFFFFFF PCI standard PCI-to-PCI bridge OK	Smart Array P800	Item Value
0xFDF00000-0xFDFFFFFFF Controller OK	Smart Array P800	Drive D:
0xFDEF0000-0xFDEF0FFF Controller OK	Smart Array P800	Description CD-ROM Drive
0xFDC00000-0xFDDFFFFFF PCI standard PCI-to-PCI bridge OK	Smart Array P800	Media Loaded No
0xFDD00000-0xFDDFFFFFF Controller OK	Smart Array P800	Media Type CD-ROM
0xFDCF0000-0xFDCFC0FFF Controller OK	Smart Array P800	Name TEAC DV-28E-N
0xFDCFC0000-0xFDCFC0FFF Controller OK	Smart Array P800	Manufacturer (Standard CD-ROM drives)
0xFDCFC0000-0xFDCFC0FFF Controller OK	Smart Array P800	Status OK
0xFDCFC0000-0xFDCFC0FFF Controller OK	Smart Array P800	Transfer Rate Not Available
0xFDCFC0000-0xFDCFC0FFF Controller OK	Smart Array P800	SCSI Target ID 0

PNP Device ID IDE\CDROMTEAC_DV-28E-
 .0 C.6B\5&2270D2F8&0&0.0
 Driver c:\windows\system32\drivers\cdrom.sys
 (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 75.50 KB
 (77,312 bytes), 3/25/2005 6:00 AM)

[Sound Device]

Item	Value
[Display]	
Item	Value
Name	ATI ES1000
PNP Device ID	PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0 2&4&21887A&0&1848
Adapter Type	ATI ES1000 (0x515E), ATI Technologies Inc. compatible
Adapter Description	ATI ES1000
Adapter RAM	32.00 MB (33,554,432 bytes)
Installed Drivers	ati2dvg.dll
Driver Version	6.14.10.6583
INF File	oem17.inf (ati2mtag_RN50 section)
Color Planes	1
Color Table Entries	4294967296
Resolution	1024 x 768 x 60 hertz
Bits/Pixel	32
Memory Address	0xE8000000-0xF7EFFFFF
I/O Port	0x00003000-0x000030FF
Memory Address	0xF78F0000-0xF78FFFFF
IRQ Channel	IRQ 18
I/O Port	0x000003B0-0x000003BB
I/O Port	0x000003C0-0x000003DF
Memory Address	0xA0000-0xBFFF
Driver	c:\windows\system32\drivers\ati2mtag.sys (6.14.10.6583, 1.97 MB (2,066,432 bytes), 5/3/2006 3:53 PM)
Item	Value
[Input]	
[Keyboard]	
Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&142B453B&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1

Driver c:\windows\system32\drivers\i8042prt.sys
 (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 91.00 KB
 (93,184 bytes), 3/25/2005 6:00 AM)

Description USB Human Interface Device
 Name Enhanced (101- or 102-key)
 Layout 00000409
 PNP Device ID USB\VID_03F0&PID_1027&MI_00\7&3B124F76&0&00
 00
 Number of Function Keys 12
 Driver c:\windows\system32\drivers\hidusb.sys
 (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 18.50 KB
 (18,944 bytes), 3/25/2005 6:00 AM)

[Pointing Device]

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	5
Status	OK
PNP Device ID	ACPI\PNP0F13\4&142B453B&0
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
IRQ Channel	IRQ 12
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 91.00 KB (93,184 bytes), 3/25/2005 6:00 AM)
Hardware Type	USB Human Interface Device
Number of Buttons	5
Status	OK
PNP Device ID	USB\VID_03F0&PID_1027&MI_01\7&3B124F76&0&00 01
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
Driver	c:\windows\system32\drivers\hidusb.sys (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 18.50 KB (18,944 bytes), 3/25/2005 6:00 AM)
Item	Value
[Network]	
[Adapter]	
Item	Value
Name	[00000001] RAS Async Adapter
Adapter Type	Not Available
Product Type	RAS Async Adapter
Installed Yes	
PNP Device ID	Not Available
Last Reset	9/18/2006 11:43 AM
Index	1

Service Name AsyncMac
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

Name [00000002] WAN Miniport (L2TP)
 Adapter Type Not Available
 Product Type WAN Miniport (L2TP)
 Installed Yes
 PNP Device ID ROOT\MS_L2TPMINIPORT\0000
 Last Reset 9/18/2006 11:43 AM
 Index 2
 Service Name Rasl2tp
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\rasl2tp.sys
 (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 132.00 KB
 (135,168 bytes), 3/25/2005 6:00 AM)

Name [00000003] WAN Miniport (PPTP)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPTP)
 Installed Yes
 PNP Device ID ROOT\MS_PPTPMINIPORT\0000
 Last Reset 9/18/2006 11:43 AM
 Index 3
 Service Name PptpMiniport
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 50:50:54:50:30:30
 Driver c:\windows\system32\drivers\rasppp.sys
 (5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 117.50 KB
 (120,320 bytes), 3/25/2005 6:00 AM)

Name [00000004] WAN Miniport (PPPOE)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPPOE)
 Installed Yes
 PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
 Last Reset 9/18/2006 11:43 AM
 Index 4
 Service Name RasPppoe
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available

DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 33:50:6F:45:30:30
Driver c:\windows\system32\drivers\raspppoe.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 67.50 KB
(69,120 bytes), 3/25/2005 6:00 AM)

Name [00000005] Direct Parallel
Adapter Type Not Available
Product Type Direct Parallel
Installed Yes
PNP Device ID ROOT\MS_PTMINIPORT\0000
Last Reset 9/18/2006 11:43 AM
Index 5
Service Name Raspti
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\raspti.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 30.50 KB
(31,232 bytes), 3/25/2005 6:00 AM)

Name [00000006] WAN Miniport (IP)
Adapter Type Not Available
Product Type WAN Miniport (IP)
Installed Yes
PNP Device ID ROOT\MS_NDISWANIP\0000
Last Reset 9/18/2006 11:43 AM
Index 6
Service Name NdisWan
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\ndiswan.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 157.50 KB
(161,280 bytes), 3/25/2005 6:00 AM)

Name [00000007] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type Not Available
Product Type HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 9/18/2006 11:43 AM
Index 7
Service Name 12nd
IP Address Not Available
IP Subnet Not Available

Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000008] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type Not Available
Product Type HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 9/18/2006 11:43 AM
Index 8
Service Name 12nd
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000009] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type Not Available
Product Type HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 9/18/2006 11:43 AM
Index 9
Service Name 12nd
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000010] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type Not Available
Product Type HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 9/18/2006 11:43 AM
Index 10
Service Name 12nd
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available

DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000011] HP NC340T PCI-X Quad-port
Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit
Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 9/18/2006 11:43 AM
Index 11
Service Name N1000
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled Yes
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000012] HP NC340T PCI-X Quad-port
Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit
Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 9/18/2006 11:43 AM
Index 12
Service Name N1000
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000013] HP NC340T PCI-X Quad-port
Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit
Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 9/18/2006 11:43 AM
Index 13
Service Name N1000
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled Yes
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name	[00000014] HP NC340T PCI-X Quad-port
Gigabit Server Adapter	
Adapter Type	Not Available
Product Type	HP NC340T PCI-X Quad-port Gigabit
Server Adapter	
Installed Yes	
PNP Device ID	Not Available
Last Reset	9/18/2006 11:43 AM
Index	14
Service Name	N1000
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000015] HP NC340T PCI-X Quad-port
Gigabit Server Adapter	
Adapter Type	Not Available
Product Type	HP NC340T PCI-X Quad-port Gigabit
Server Adapter	
Installed Yes	
PNP Device ID	Not Available
Last Reset	9/18/2006 11:43 AM
Index	15
Service Name	N1000
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	Yes
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000016] HP NC340T PCI-X Quad-port
Gigabit Server Adapter	
Adapter Type	Not Available
Product Type	HP NC340T PCI-X Quad-port Gigabit
Server Adapter	
Installed Yes	
PNP Device ID	Not Available
Last Reset	9/18/2006 11:43 AM
Index	16
Service Name	N1000
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000017] HP NC340T PCI-X Quad-port
Gigabit Server Adapter	
Adapter Type	Not Available

Product Type	HP NC340T PCI-X Quad-port Gigabit
Server Adapter	
Installed Yes	
PNP Device ID	Not Available
Last Reset	9/18/2006 11:43 AM
Index	17
Service Name	N1000
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	Yes
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000018] HP NC340T PCI-X Quad-port
Gigabit Server Adapter	
Adapter Type	Not Available
Product Type	HP NC340T PCI-X Quad-port Gigabit
Server Adapter	
Installed Yes	
PNP Device ID	Not Available
Last Reset	9/18/2006 11:43 AM
Index	18
Service Name	N1000
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000019] HP NC371i Multifunction Gigabit
Server Adapter	
Adapter Type	Ethernet 802.3
Product Type	HP NC371i Multifunction Gigabit
Server Adapter	
Installed Yes	
PNP Device ID	B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R EV_02\5&2945E16&0&20054102
Last Reset	9/18/2006 11:43 AM
Index	19
Service Name	l2nd
IP Address	130.168.208.50, 130.120.208.50
IP Subnet	255.255.0.0, 255.255.0.0
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:15:60:54:E7:C0
Driver	c:\windows\system32\drivers\bxnd52a.sys (2.8.13.0 built by: WinDDK, 81.00 KB (82,944 bytes), 5/5/2006 10:50 AM)

Name	[00000020] HP NC371i Multifunction Gigabit
Server Adapter	
Adapter Type	Ethernet 802.3
Product Type	HP NC371i Multifunction Gigabit
Server Adapter	
Installed Yes	
PNP Device ID	B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R EV_02\5&B64F98D&0&20054101
Last Reset	9/18/2006 11:43 AM
Index	20
Service Name	l2nd
IP Address	130.121.208.50, 130.122.208.50
IP Subnet	255.255.0.0, 255.255.0.0
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:15:60:54:E7:BE
Driver	c:\windows\system32\drivers\bxnd52a.sys (2.8.13.0 built by: WinDDK, 81.00 KB (82,944 bytes), 5/5/2006 10:50 AM)
[Protocol]	
Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No

Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes
Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

[WinSock]

Item	Value
File	c:\windows\system32\wsock32.dll
Size	24.50 KB (25,088 bytes)
Version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)

[Ports]

[Serial]

Item	Value
------	-------

[Parallel]

Item	Value
------	-------

[Storage]

[Drives]

Item	Value
Drive A:	
Description	3 1/2 Inch Floppy Drive
Drive C:	
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	33.88 GB (36,381,306,880 bytes)
Free Space	21.21 GB (22,768,852,992 bytes)
Volume Name	
Volume Serial Number	E82437B9

Drive D:	
Description	CD-ROM Disc

Drive E:	
Description	Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available

Drive W:	
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	727.84 GB (781,516,718,080 bytes)
Free Space	338.77 GB (363,755,335,680 bytes)

Volume Name	back5
Volume Serial Number	246C5824

Drive X:	
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	727.84 GB (781,516,718,080 bytes)
Free Space	334.11 GB (358,751,805,440 bytes)

Volume Name	back6
Volume Serial Number	D07E0C63

Drive Y:	
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	727.84 GB (781,516,718,080 bytes)
Free Space	338.77 GB (363,755,380,736 bytes)

Volume Name	back3
Volume Serial Number	44DCAE2B

Drive Z:	
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	727.84 GB (781,516,718,080 bytes)
Free Space	338.77 GB (363,746,467,840 bytes)
Volume Name	back4
Volume Serial Number	50F44C79

[Disks]

Item	Value
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 3	
SCSI Target ID	4
Sectors/Track	32
Size	33.89 GB (36,385,505,280 bytes)
Total Cylinders	8,709
Total Sectors	71,065,440
Total Tracks	2,220,795
Tracks/Cylinder	255
Partition Disk #1, Partition #0	
Partition Size	33.88 GB (36,381,310,976 bytes)
Partition Starting Offset	16,384 bytes

Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 5	
SCSI Target ID	4
Sectors/Track	63
Size	114.25 GB (122,680,051,200 bytes)
Total Cylinders	14,915
Total Sectors	239,609,475
Total Tracks	3,803,325
Tracks/Cylinder	255
Partition Disk #8, Partition #0	
Partition Size	114.25 GB (122,680,246,272 bytes)

Partition Starting Offset	65,536 bytes
---------------------------	--------------

Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device

Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 5	
SCSI Target ID	5
Sectors/Track	63
Size	56.64 GB (60,817,720,320 bytes)
Total Cylinders	7,394
Total Sectors	118,784,610
Total Tracks	1,885,470
Tracks/Cylinder	255
Partition Disk #9, Partition #0	
Partition Size	56.64 GB (60,817,408,000 bytes)
Partition Starting Offset	65,536 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 5	
SCSI Target ID	6
Sectors/Track	63
Size	727.84 GB (781,516,753,920 bytes)
Total Cylinders	95,014
Total Sectors	1,526,399,910
Total Tracks	24,228,570
Tracks/Cylinder	255
Partition Disk #10, Partition #0	
Partition Size	727.84 GB (781,516,721,664 bytes)
Partition Starting Offset	32,256 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 5	
SCSI Target ID	7
Sectors/Track	63
Size	114.25 GB (122,680,051,200 bytes)
Total Cylinders	14,915
Total Sectors	239,609,475
Total Tracks	3,803,325
Tracks/Cylinder	255
Partition Disk #11, Partition #0	
Partition Size	114.25 GB (122,680,246,272 bytes)

Partition Starting Offset	65,536 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 5	
SCSI Target ID	8
Sectors/Track	63
Size	56.64 GB (60,817,720,320 bytes)
Total Cylinders	7,394
Total Sectors	118,784,610
Total Tracks	1,885,470
Tracks/Cylinder	255
Partition Disk #12, Partition #0	
Partition Size	56.64 GB (60,817,408,000 bytes)
Partition Starting Offset	65,536 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 5	
SCSI Target ID	9
Sectors/Track	63
Size	727.84 GB (781,516,753,920 bytes)
Total Cylinders	95,014
Total Sectors	1,526,399,910
Total Tracks	24,228,570
Tracks/Cylinder	255
Partition Disk #13, Partition #0	
Partition Size	727.84 GB (781,516,721,664 bytes)
Partition Starting Offset	32,256 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 5	
SCSI Target ID	4
Sectors/Track	63
Size	820.01 GB (880,483,322,880 bytes)
Total Cylinders	107,046
Total Sectors	1,719,693,990

Total Tracks	27,296,730
Tracks/Cylinder	255
Partition Disk #0, Partition #0	
Partition Size	820.01 GB (880,482,975,744 bytes)
Partition Starting Offset	65,536 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 4	
SCSI Target ID	4
Sectors/Track	32
Size	114.26 GB (122,680,442,880 bytes)
Total Cylinders	29,364
Total Sectors	239,610,240
Total Tracks	7,487,820
Tracks/Cylinder	255
Partition Disk #2, Partition #0	
Partition Size	114.25 GB (122,680,246,272 bytes)
Partition Starting Offset	65,536 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 4	
SCSI Target ID	5
Sectors/Track	32
Size	56.64 GB (60,817,981,440 bytes)
Total Cylinders	14,557
Total Sectors	118,785,120
Total Tracks	3,712,035
Tracks/Cylinder	255
Partition Disk #3, Partition #0	
Partition Size	56.64 GB (60,817,408,000 bytes)
Partition Starting Offset	65,536 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 4	
SCSI Target ID	4
Sectors/Track	63
Size	820.01 GB (880,483,322,880 bytes)
Total Cylinders	107,046
Total Sectors	1,719,693,990

SCSI Target ID 6
 Sectors/Track 32
 Size 114.26 GB (122,680,442,880 bytes)
 Total Cylinders 29,364
 Total Sectors 239,610,240
 Total Tracks 7,487,820
 Tracks/Cylinder 255
 Partition Disk #4, Partition #0
 Partition Size 114.25 GB (122,680,246,272 bytes)

Partition Starting Offset 65,536 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 4
 SCSI Target ID 7
 Sectors/Track 63
 Size 56.64 GB (60,817,720,320 bytes)
 Total Cylinders 7,394
 Total Sectors 118,784,610
 Total Tracks 1,885,470
 Tracks/Cylinder 255
 Partition Disk #5, Partition #0
 Partition Size 56.64 GB (60,817,408,000 bytes)

Partition Starting Offset 65,536 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 4
 SCSI Target ID 8
 Sectors/Track 63
 Size 727.84 GB (781,516,753,920 bytes)
 Total Cylinders 95,014
 Total Sectors 1,526,399,910
 Total Tracks 24,228,570
 Tracks/Cylinder 255
 Partition Disk #6, Partition #0
 Partition Size 727.84 GB (781,516,721,664 bytes)

Partition Starting Offset 32,256 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes

Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 4
 SCSI Target ID 9
 Sectors/Track 63
 Size 727.84 GB (781,516,753,920 bytes)
 Total Cylinders 95,014
 Total Sectors 1,526,399,910
 Total Tracks 24,228,570
 Tracks/Cylinder 255
 Partition Disk #7, Partition #0
 Partition Size 727.84 GB (781,516,721,664 bytes)

Partition Starting Offset 32,256 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 8
 SCSI Target ID 4
 Sectors/Track 63
 Size 114.25 GB (122,680,051,200 bytes)
 Total Cylinders 14,915
 Total Sectors 239,609,475
 Total Tracks 3,803,325
 Tracks/Cylinder 255
 Partition Disk #20, Partition #0
 Partition Size 114.25 GB (122,671,793,664 bytes)

Partition Starting Offset 32,256 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes

Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 8
 SCSI Target ID 5
 Sectors/Track 63
 Size 114.25 GB (122,680,051,200 bytes)
 Total Cylinders 14,915
 Total Sectors 239,609,475
 Total Tracks 3,803,325
 Tracks/Cylinder 255
 Partition Disk #21, Partition #0
 Partition Size 114.25 GB (122,671,793,664 bytes)

Partition Starting Offset 32,256 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 8
 SCSI Target ID 6
 Sectors/Track 63
 Size 56.64 GB (60,817,720,320 bytes)
 Total Cylinders 7,394
 Total Sectors 118,784,610
 Total Tracks 1,885,470
 Tracks/Cylinder 255
 Partition Disk #22, Partition #0
 Partition Size 56.63 GB (60,809,462,784 bytes)

Partition Starting Offset 32,256 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1

SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 8
 SCSI Target ID 7
 Sectors/Track 63
 Size 56.64 GB (60,817,720,320 bytes)
 Total Cylinders 7,394
 Total Sectors 118,784,610
 Total Tracks 1,885,470
 Tracks/Cylinder 255
 Partition Disk #23, Partition #0
 Partition Size 56.63 GB (60,809,462,784 bytes)

Partition Starting Offset 32,256 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes

Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 6
 SCSI Target ID 4
 Sectors/Track 32
 Size 114.26 GB (122,680,442,880 bytes)
 Total Cylinders 29,364
 Total Sectors 239,610,240
 Total Tracks 7,487,820
 Tracks/Cylinder 255

Partition Disk #14, Partition #0
 Partition Size 114.25 GB (122,680,246,272 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 6
 SCSI Target ID 5
 Sectors/Track 32
 Size 56.64 GB (60,817,981,440 bytes)
 Total Cylinders 14,557
 Total Sectors 118,785,120
 Total Tracks 3,712,035
 Tracks/Cylinder 255
 Partition Disk #15, Partition #0
 Partition Size 56.64 GB (60,817,408,000 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 6
 SCSI Target ID 5
 Sectors/Track 32
 Size 56.64 GB (60,817,981,440 bytes)
 Total Cylinders 14,557
 Total Sectors 118,785,120
 Total Tracks 3,712,035
 Tracks/Cylinder 255
 Partition Disk #15, Partition #0
 Partition Size 56.64 GB (60,817,408,000 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 6
 SCSI Target ID 6
 Sectors/Track 32
 Size 114.26 GB (122,680,442,880 bytes)
 Total Cylinders 29,364
 Total Sectors 239,610,240
 Total Tracks 7,487,820
 Tracks/Cylinder 255
 Partition Disk #16, Partition #0
 Partition Size 114.25 GB (122,680,246,272 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 6
 SCSI Target ID 7
 Sectors/Track 32

Size 56.64 GB (60,817,981,440 bytes)
 Total Cylinders 14,557
 Total Sectors 118,785,120
 Total Tracks 3,712,035
 Tracks/Cylinder 255
 Partition Disk #17, Partition #0
 Partition Size 56.64 GB (60,817,408,000 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 7
 SCSI Target ID 4
 Sectors/Track 63
 Size 114.25 GB (122,680,051,200 bytes)
 Total Cylinders 14,915
 Total Sectors 239,609,475
 Total Tracks 3,803,325
 Tracks/Cylinder 255
 Partition Disk #18, Partition #0
 Partition Size 114.25 GB (122,680,246,272 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 7
 SCSI Target ID 4
 Sectors/Track 63
 Size 114.25 GB (122,680,051,200 bytes)
 Total Cylinders 14,915
 Total Sectors 239,609,475
 Total Tracks 3,803,325
 Tracks/Cylinder 255
 Partition Disk #18, Partition #0
 Partition Size 114.25 GB (122,680,246,272 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 7
 SCSI Target ID 5
 Sectors/Track 63
 Size 56.64 GB (60,817,720,320 bytes)
 Total Cylinders 7,394
 Total Sectors 118,784,610
 Total Tracks 1,885,470
 Tracks/Cylinder 255
 Partition Disk #25, Partition #0
 Partition Size 56.64 GB (60,817,408,000 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 0
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 9
 SCSI Target ID 6
 Sectors/Track 63
 Size 727.84 GB (781,516,753,920 bytes)
 Total Cylinders 95,014
 Total Sectors 1,526,399,910
 Total Tracks 24,228,570
 Tracks/Cylinder 255

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 9
 SCSI Target ID 4
 Sectors/Track 63
 Size 114.25 GB (122,680,051,200 bytes)
 Total Cylinders 14,915
 Total Sectors 239,609,475
 Total Tracks 3,803,325
 Tracks/Cylinder 255
 Partition Disk #24, Partition #0
 Partition Size 114.25 GB (122,679,197,696 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 9
 SCSI Target ID 5
 Sectors/Track 63
 Size 56.64 GB (60,817,720,320 bytes)
 Total Cylinders 7,394
 Total Sectors 118,784,610
 Total Tracks 1,885,470
 Tracks/Cylinder 255
 Partition Disk #25, Partition #0
 Partition Size 56.64 GB (60,817,408,000 bytes)
 Partition Starting Offset 65,536 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 0
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 9
 SCSI Target ID 6
 Sectors/Track 63
 Size 727.84 GB (781,516,753,920 bytes)
 Total Cylinders 95,014
 Total Sectors 1,526,399,910
 Total Tracks 24,228,570
 Tracks/Cylinder 255

Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 9	
SCSI Target ID	7
Sectors/Track	63
Size	114.25 GB (122,680,051,200 bytes)
Total Cylinders	14,915
Total Sectors	239,609,475
Total Tracks	3,803,325
Tracks/Cylinder	255
Partition Disk #27, Partition #0	
Partition Size	114.25 GB (122,679,197,696 bytes)
Partition Starting Offset	65,536 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 9	
SCSI Target ID	8
Sectors/Track	63
Size	56.64 GB (60,817,720,320 bytes)
Total Cylinders	7,394
Total Sectors	118,784,610
Total Tracks	1,885,470
Tracks/Cylinder	255
Partition Disk #28, Partition #0	
Partition Size	56.64 GB (60,817,408,000 bytes)
Partition Starting Offset	65,536 bytes
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	0
SCSI Bus 0	
SCSI Logical Unit	0
SCSI Port 9	
SCSI Target ID	9
Sectors/Track	63
Size	727.84 GB (781,516,753,920 bytes)
Total Cylinders	95,014
Total Sectors	1,526,399,910
Total Tracks	24,228,570
Tracks/Cylinder	255
[SCSI]	
Item	Value
Name	Smart Array BUMPERLITE Controller
Manufacturer	Hewlett-Packard Company

Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
Memory Address	0xF7E00000-0xF7FFFF
I/O Port	0x00006000-0x0006FFF
Memory Address	0xF7DF0000-0xF7DF0FFF
IRQ Channel	IRQ 16
Driver	c:\windows\system32\drivers\hpcisss2.sys
	(5.12.0.64 Build 2 (x86-64) built by: buildsrv, 57.50
KB	KB (58,880 bytes), 1/5/2006 11:46 AM)
Name	Smart Array P800 Controller
Manufacturer	Hewlett-Packard Company
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
Memory Address	0xB98F5C40&0x0068
Memory Address	0xF7C00000-0xF7CFFFFF
I/O Port	0x00005000-0x0005FFF
Memory Address	0xF7BF0000-0xF7BF0FFF
IRQ Channel	IRQ 19
Driver	c:\windows\system32\drivers\hpcisss2.sys
	(5.12.0.64 Build 2 (x86-64) built by: buildsrv, 57.50
KB	KB (58,880 bytes), 1/5/2006 11:46 AM)
Name	Smart Array P800 Controller
Manufacturer	Hewlett-Packard Company
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
Memory Address	0xF7A00000-0xF7AFFFFF
I/O Port	0x00004000-0x0004FFF
Memory Address	0xF79F0000-0xF79F0FFF
IRQ Channel	IRQ 18
Driver	c:\windows\system32\drivers\hpcisss2.sys
	(5.12.0.64 Build 2 (x86-64) built by: buildsrv, 57.50
KB	KB (58,880 bytes), 1/5/2006 11:46 AM)
Name	Smart Array P800 Controller
Manufacturer	Hewlett-Packard Company
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
Memory Address	0x13700CED&0x0070
Memory Address	0xF7A00000-0xF7AFFFFF
I/O Port	0x00004000-0x0004FFF
Memory Address	0xF79F0000-0xF79F0FFF
IRQ Channel	IRQ 18
Driver	c:\windows\system32\drivers\hpcisss2.sys
	(5.12.0.64 Build 2 (x86-64) built by: buildsrv, 57.50
KB	KB (58,880 bytes), 1/5/2006 11:46 AM)
Name	Smart Array P800 Controller
Manufacturer	Hewlett-Packard Company
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
Memory Address	0x1300C8240&0x0058
Memory Address	0xFDF00000-0xFDFFFFFF
I/O Port	0x0000B000-0x0000BFFF
Memory Address	0xFDEF0000-0xFDEF0FFF
IRQ Channel	IRQ 55
Driver	c:\windows\system32\drivers\hpcisss2.sys
	(5.12.0.64 Build 2 (x86-64) built by: buildsrv, 57.50
KB	KB (58,880 bytes), 1/5/2006 11:46 AM)
Name	Smart Array P800 Controller
Manufacturer	Hewlett-Packard Company
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
Memory Address	0x137ABAA0&0x0060
Memory Address	0xFDD00000-0xFDDFFFFF

I/O Port	0x0000A000-0x0000AFFF
Memory Address	0xFDCF0000-0xFDCF0FFF
IRQ Channel	IRQ 54
Driver	c:\windows\system32\drivers\hpcisss2.sys
	(5.12.0.64 Build 2 (x86-64) built by: buildsrv, 57.50
KB	KB (58,880 bytes), 1/5/2006 11:46 AM)
Name	Smart Array P800 Controller
Manufacturer	Hewlett-Packard Company
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
Memory Address	0x14&1B1CF5E7&0x0068
Memory Address	0xFDB00000-0xFDBFFFFF
I/O Port	0x00009000-0x00009FFF
Memory Address	0xFDAF0000-0xFDAF0FFF
IRQ Channel	IRQ 57
Driver	c:\windows\system32\drivers\hpcisss2.sys
	(5.12.0.64 Build 2 (x86-64) built by: buildsrv, 57.50
KB	KB (58,880 bytes), 1/5/2006 11:46 AM)
Name	Smart Array P800 Controller
Manufacturer	Hewlett-Packard Company
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
Memory Address	0x14&3EC0CCA0&0x0070
Memory Address	0xFD900000-0xFD9FFFFF
I/O Port	0x00008000-0x00008FFF
Memory Address	0xFD8F0000-0xFD8F0FFF
IRQ Channel	IRQ 56
Driver	c:\windows\system32\drivers\hpcisss2.sys
	(5.12.0.64 Build 2 (x86-64) built by: buildsrv, 57.50
KB	KB (58,880 bytes), 1/5/2006 11:46 AM)
Name	Smart Array P600 Controller
Manufacturer	Hewlett-Packard Company
Status	OK
PNP Device ID	PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
Memory Address	0x14&24CF26E8&0x1088
Memory Address	0xFD7F0000-0xFD7F1FFF
I/O Port	0x00007000-0x00007FFF
Memory Address	0xFD780000-0xFD7BFFFF
IRQ Channel	IRQ 26
Driver	c:\windows\system32\drivers\hpcisss2.sys
	(5.12.0.64 Build 2 (x86-64) built by: buildsrv, 57.50
KB	KB (58,880 bytes), 1/5/2006 11:46 AM)
[IDE]	
Item	Value
Name	Standard Dual Channel PCI IDE Controller
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCI\VEN_10DE&DEV_0053&SUBSYS_31F8103C&REV_A
Memory Address	3\3&20FEA912&0&30
I/O Port	0x00001000-0x00006FFF

```

Driver      c:\windows\system32\drivers\pciide.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 6.00 KB
(6,144 bytes), 3/25/2005 6:00 AM)

Name      Primary IDE Channel
Manufacturer      (Standard IDE ATA/ATAPI
controllers)
Status      OK
PNP Device ID    PCIIDE\IDECHANNEL\4&23A0739C&0&0

I/O Port 0x000001F0-0x000001F7
I/O Port 0x000003F6-0x000003F6
IRQ Channel IRQ 14
Driver      c:\windows\system32\drivers\atapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 145.00 KB
(148,480 bytes), 3/25/2005 6:00 AM)

Name      Secondary IDE Channel
Manufacturer      (Standard IDE ATA/ATAPI
controllers)
Status      OK
PNP Device ID    PCIIDE\IDECHANNEL\4&23A0739C&0&1

I/O Port 0x00000170-0x00000177
I/O Port 0x00000376-0x00000376
Driver      c:\windows\system32\drivers\atapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 145.00 KB
(148,480 bytes), 3/25/2005 6:00 AM)

[Printing]

Name      Driver      Port Name Server Name

[Problem Devices]

Device      PNP Device ID      Error Code
Not Available ACPI\IP1001\0      The drivers
for this device are not installed.
Base System Device
PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0
3\4&21887AE&0&2248 The drivers for this device are
not installed.

[USB]

Device      PNP Device ID
Standard OpenHCD USB Host Controller
PCI\VEN_10DE&DEV_005A&SUBSYS_31F8103C&REV_A
2\3&20FEA912&0&10
Standard Enhanced PCI to USB Host Controller
PCI\VEN_10DE&DEV_005B&SUBSYS_31F8103C&REV_A
4\3&20FEA912&0&11
Standard Universal PCI to USB Host Controller
PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0
0\4&21887AE&0&2448

[Software Environment]

[System Drivers]

```

Name	Description	File	Type	Running	OK	Ignore	No	Yes
	Started	Start Mode	State					
	Status	Error Control	Accept Pause					
	Accept Stop							
abiosdsk	Abiosdsk	Not Available	Kernel Driver	atmarpc	ATM ARP Client Protocol			
	No	Disabled	Stopped		c:\windows\system32\drivers\atmarpc.sys			
	Ignore	No	No		Kernel Driver	No	Manual	
					Stopped	OK	Normal	No
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	Kernel Driver	audstub	Audio Stub Driver			
	Kernel Driver	Yes	Boot		c:\windows\system32\drivers\audstub.sys			
	Running	OK	Normal		Kernel Driver	Yes	Manual	
			No		Running	OK	Normal	Yes
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver	b06bdrv	HP Virtual Bus Device			
	Kernel Driver	No	Disabled		c:\windows\system32\drivers\b06bdrv.sys			
	Stopped	OK	Normal		Kernel Driver	Yes	Boot	
			No		Running	OK	Normal	No
			No					Yes
adpu160m	adpu160m	Not Available	Kernel Driver	beep	Beep			
	No	Disabled	Stopped		c:\windows\system32\drivers\beep.sys			
	Normal	No	No		Kernel Driver	Yes	System	
					Running	OK	Normal	Yes
adpu320	adpu320	Not Available	Kernel Driver	bus_use	bus_use.sys			
	No	Disabled	Stopped		\??\c:\windows\system32\drivers\bus_use.sys			
	Normal	No	No		Kernel Driver	No	Manual	
					Stopped	OK	Normal	No
afd	AFD	c:\windows\system32\drivers\afd.sys	Kernel Driver	cdac15ba	CdaC15BA			
	Kernel Driver	Yes	System		c:\windows\system32\drivers\cdac15ba.sys			
	Running	OK	Normal		Kernel Driver	Yes	Auto	
			No		Running	OK	Normal	Yes
aic78u2	aic78u2	Not Available	Kernel Driver	cdad10ba	CdaD10BA			
	No	Disabled	Stopped		c:\windows\system32\drivers\cdad10ba.sys			
	Normal	No	No		Kernel Driver	Yes	Auto	
					Running	OK	Normal	Yes
aic78xx	aic78xx	Not Available	Kernel Driver	cdfs	Cdfs			
	No	Disabled	Stopped		c:\windows\system32\drivers\cdfs.sys			
	Normal	No	No		File System Driver	Yes	Disabled	
					Running	OK	Normal	Yes
aliide	AliIde	Not Available	Kernel Driver	cdrom	CD-ROM Driver			
	No	Disabled	Stopped		c:\windows\system32\drivers\cdrom.sys			
	Normal	No	No		Kernel Driver	Yes	System	
					Running	OK	Normal	Yes
amdide	Amdide	Not Available	Kernel Driver	changer	Changer	Not Available	Kernel Driver	
	No	Disabled	Stopped		No	System	Stopped	
	Normal	No	No		Ignore	No	OK	
arc	arc	Not Available	Kernel Driver	clusdisk	Cluster Disk Driver			
	No	Disabled	Stopped		c:\windows\system32\drivers\clusdisk.sys			
	Normal	No	No		Kernel Driver	No	Disabled	
					Stopped	OK	Normal	No
asyncmac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asyncmac.sys	Kernel Driver	cmdide	CmdIde	Not Available	Kernel Driver	
	Kernel Driver	No	Manual		No	Disabled	OK	
	Stopped	OK	Normal		Normal	No	No	
			No		Ignore	No	No	
atapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys	Kernel Driver	cpqciimm	Cpqciimm	Not Available	Kernel Driver	
	Kernel Driver	Yes	Boot		No	Disabled	OK	
	Running	OK	Normal		Normal	No	No	
			No		Ignore	No	No	
atdisk	Atdisk	Not Available	Kernel Driver		No	Enabled	Stopped	
	No	Disabled	Stopped		Normal	No	OK	
	Ignore	No	No		Normal	No	No	
					Normal	No	No	
ati2mtag	ati2mtag	c:\windows\system32\drivers\ati2mtag.sys	Kernel Driver		No	Enabled	Stopped	
	Kernel Driver	Yes	Manual		Normal	No	OK	
			No		Ignore	No	No	
			No		No	No	No	

cpqteam	HP Network Configuration Utility c:\windows\system32\drivers\cpqteam.sys	Kernel Driver Stopped OK Normal No No		flpydisk	Floppy Disk Driver c:\windows\system32\drivers\flpydisk.sys	Kernel Driver Running OK Normal No Yes		iirsp	Running OK Normal No Yes	Not Available No Disabled Stopped OK Normal No No	Kernel Driver Normal No OK	
cpuspy3	CpuSpy3 Driver \??\c:\windows\system32\drivers\cpuspy3.sys	Kernel Driver Stopped OK Normal No No		fltmgm	FltMgr c:\windows\system32\drivers\fltmgm.sys	File System Driver Running OK Normal No Yes		imapi	CD-Burning Filter Driver c:\windows\system32\drivers\imapi.sys	No Normal No Stopped OK Normal No Normal No	System OK Normal No No	
crcdisk	CRC Disk Filter Driver c:\windows\system32\drivers\crcdisk.sys	Kernel Driver Running OK Normal No Yes		ftdisk	Volume Manager Driver c:\windows\system32\drivers\ftdisk.sys	Kernel Driver Running OK Normal No Yes		intelide	IntelIDE No Normal No Stopped OK Normal No Normal No	Not Available Disabled Stopped Normal No Manual	Kernel Driver OK	
dfsdriver	DfsDriver c:\windows\system32\drivers\dfs.sys	File System Driver Running OK Normal No Yes		gpc	Generic Packet Classifier c:\windows\system32\drivers\msgpc.sys	Kernel Driver Running OK Normal No Yes		intelppm	Intel Processor Driver c:\windows\system32\drivers\intelppm.sys	No Normal No Stopped OK Normal No Normal No	Manual	
disk	Disk Driver c:\windows\system32\drivers\disk.sys	Kernel Driver Running OK Normal No Yes		hidusb	Microsoft HID Class Driver c:\windows\system32\drivers\hidusb.sys	Kernel Driver Running OK Ignore No Yes		ip6fw	IPv6 Windows Firewall Driver c:\windows\system32\drivers\ip6fw.sys	No Normal No Stopped OK Normal No Normal No	Manual	
dmboot	dmboot c:\windows\system32\drivers\dmboot.sys	Kernel Driver Stopped OK Normal No No		hpciss	hpciss c:\windows\system32\drivers\hpciss.sys	Kernel Driver Running OK Normal No Yes		ipfilterdriver	IP Traffic Filter Driver c:\windows\system32\drivers\ipfltdrv.sys	No Normal No Stopped OK Normal No Normal No	Manual	
dmio	Logical Disk Manager Driver c:\windows\system32\drivers\dmio.sys	Kernel Driver Running OK Normal No Yes		hpciss2	HpCISSt2 c:\windows\system32\drivers\hpciss2.sys	Kernel Driver Running OK Normal No Yes		ipinip	IP in IP Tunnel Driver c:\windows\system32\drivers\ipinip.sys	No Normal No Stopped OK Normal No Normal No	Manual	
dmload	dmload c:\windows\system32\drivers\dmload.sys	Kernel Driver Running OK Normal No Yes		hpqcissb	Smart Array Controllers Non-Miniport Bus Driver c:\windows\system32\drivers\hpqcissb.sys	Kernel Driver Running OK Normal No Yes		ipnat	IP Network Address Translator c:\windows\system32\drivers\ipnat.sys	No Normal No Stopped OK Normal No Normal No	Manual	
dpti2o	dpti2o Not Available No Normal No Normal No Normal No	Kernel Driver Stopped OK Normal No OK		hpqcissd	Smart Array Controllers Non-Miniport Disk Driver c:\windows\system32\drivers\hpqcissd.sys	Kernel Driver Running OK Normal No Yes		ipsec	IPSEC driver c:\windows\system32\drivers\ipsec.sys	Yes Normal No Running OK Normal No Normal No	System No Normal No Yes	
elxstor	elxstor Not Available No Normal Stopped Normal No Normal No	Kernel Driver OK Normal No OK		hpqilo2	hpqilo2 c:\windows\system32\drivers\hpqilo2.sys	Kernel Driver Running OK Normal No Yes		isapnp	PnP ISA/EISA Bus Driver c:\windows\system32\drivers\isapnp.sys	Yes Normal No Running OK Critical No Normal No	Boot No OK Yes	
fastfat	Fastfat c:\windows\system32\drivers\fastfat.sys	File System Driver Stopped OK Normal No No		http	HTTP c:\windows\system32\drivers\http.sys	Kernel Driver Stopped OK Normal No No		kbdclass	Keyboard Class Driver c:\windows\system32\drivers\kbdclass.sys	No Normal No Running OK Normal No Normal No	Manual No System Normal No Yes	
fdc	Floppy Disk Controller Driver c:\windows\system32\drivers\fdc.sys	Kernel Driver Running OK Normal No Yes		i20mgmt	i20mgmt Not Available No System Stopped OK Normal No No	Kernel Driver OK Normal No Normal No		kbhid	Keyboard HID Driver c:\windows\system32\drivers\kbhid.sys	Yes Normal No Running OK Ignore No Normal No	System No Normal No Yes	
fips	Fips c:\windows\system32\drivers\fips.sys	Kernel Driver Running OK Normal No Yes		i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver c:\windows\system32\drivers\i8042prt.sys	Kernel Driver Yes System		ksecd	KSecDD c:\windows\system32\drivers\ksecd.sys	Yes Normal No Normal No Normal No Normal No	Boot Normal No Normal No Normal No Normal No	

		Running	OK	Normal	No	Yes			Running	OK	Normal	No	Yes			ntfs	Ntfs
ksthunk	Kernel Streaming WOW64 Thunk Service c:\windows\system32\drivers\ksthunk.sys	Kernel Driver	Yes	Manual			multevent	MultEvent Driver \??\c:\windows\system32\drivers\multeventdr	Kernel Driver	No	Manual			ntfs	c:\windows\system32\drivers\ntfs.sys		
	Running	OK	Normal	No	Yes		iver.sys	Stopped	OK	Normal	No	No		File System Driver	Yes	Disabled	
l2nd Adapter	HP NC370 Multifunction Gigabit Server c:\windows\system32\drivers\bxnd52a.sys	Kernel Driver	Yes	Manual			mup	Mup c:\windows\system32\drivers\mup.sys	Kernel Driver	No	Manual			Running	OK	Normal	Yes
	Running	OK	Normal	No	Yes			File System Driver	Yes	Boot			null	Null	c:\windows\system32\drivers\null.sys		
lp6nds35	lp6nds35 Not Available Kernel Driver No Disabled Stopped OK	Normal	No	No			Running	OK	Normal	No	Yes		Kernel Driver	Yes	System		
mnmd	Normal	No	No				n1000	HP Gigabit NIC Driver c:\windows\system32\drivers\nlg5132e.sys	Kernel Driver	No	Manual			Running	OK	Normal	Yes
	mnmd c:\windows\system32\drivers\mnmd.sys	Kernel Driver	Yes	System			Stopped	OK	Normal	No	No		Stopped	OK	Normal	No	
modem	Modem c:\windows\system32\drivers\modem.sys	Kernel Driver	No	Manual			ndis	NDIS System Driver c:\windows\system32\drivers\ndis.sys	Kernel Driver	Yes	Boot			partmgr	Partition Manager c:\windows\system32\drivers\partmgr.sys		
	Stopped	OK	Ignore	No	Yes		Running	OK	Normal	No	Yes		Kernel Driver	Yes	Boot		
mouclass	Mouse Class Driver c:\windows\system32\drivers\mouclass.sys	Kernel Driver	Yes	System			ndistapi	Remote Access NDIS TAPI Driver c:\windows\system32\drivers\ndistapi.sys	Kernel Driver	Yes	Manual			pci	PCI Bus Driver c:\windows\system32\drivers\pci.sys		
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes		Kernel Driver	Yes	Boot		
mouhid	Mouse HID Driver c:\windows\system32\drivers\mouhid.sys	Kernel Driver	Yes	Manual			ndisui0	NDIS Usermode I/O Protocol c:\windows\system32\drivers\ndisui0.sys	Kernel Driver	No	Manual			pcide	PCI IDE c:\windows\system32\drivers\pcide.sys		
	Running	OK	Ignore	No	Yes		Stopped	OK	Normal	No	No		Kernel Driver	Yes	Boot		
mountmgr	Mount Point Manager c:\windows\system32\drivers\mountmgr.sys	Kernel Driver	Yes	Boot			ndiswan	Remote Access NDIS WAN Driver c:\windows\system32\drivers\ndiswan.sys	Kernel Driver	Yes	Manual			pcmcia	Pcmcia c:\windows\system32\drivers\pcmcia.sys		
	Running	OK	Normal	No	Yes		Running	OK	Normal	No	Yes		Kernel Driver	No	Disabled		
mraids35x	mraids35x Not Available Kernel Driver No Disabled Stopped OK	Normal	No	No			ndproxy	NDIS Proxy c:\windows\system32\drivers\ndproxy.sys	Kernel Driver	Yes	Manual			pdcomp	PDCOMP Not Available		
	mrxdav	WebDav Client Redirector c:\windows\system32\drivers\mrxdav.sys	File System Driver	No	Manual		Running	OK	Normal	No	Yes		Kernel Driver	No	Stopped	OK	
	Stopped	OK	Normal	No	No		netbios	NetBIOS Interface c:\windows\system32\drivers\netbios.sys	Kernel Driver	Yes	System			pdframe	PDFRAME Not Available		
mrxsmb	MRXSMB c:\windows\system32\drivers\mrxsmb.sys	File System Driver	Yes	System			Running	OK	Normal	No	Yes		Kernel Driver	No	Stopped	OK	
	Running	OK	Normal	No	Yes		netbt	NetBios over Tcpip c:\windows\system32\drivers\netbt.sys	Kernel Driver	Yes	System			pdreli	PDRELI Not Available		
msfs	Msfs c:\windows\system32\drivers\msfs.sys	File System Driver	Yes	System			Running	OK	Normal	No	Yes		Kernel Driver	No	Stopped	OK	
	Running	OK	Normal	No	Yes		nfrd960	nfrd960 Not Available Kernel Driver No Disabled Stopped OK	Normal	No	No		pdrrframe	PDRRFRAME Not Available			
mssmbios	Microsoft System Management BIOS Driver c:\windows\system32\drivers\mssmbios.sys	Kernel Driver	Yes	Manual			npfs	Npfs c:\windows\system32\drivers\npfs.sys	File System Driver	Yes	System			pptpminiport	WAN Miniport (PPTP) c:\windows\system32\drivers\raspppt.sys		
							Running	OK	Normal	No	Yes		Kernel Driver	Yes	Manual		
													processor	Processor Driver c:\windows\system32\drivers\processr.sys			
													Kernel Driver	Yes	Manual		
													Running	OK	Normal	Yes	
													Running	OK	Normal	Yes	
													ptilink	Direct Parallel Link Driver c:\windows\system32\drivers\ptilink.sys			
													Kernel Driver	Yes	Manual		

ql2300 (wx64 IP)	QLogic Fibre Channel SCSI Miniport Driver c:\windows\system32\drivers\ql2300.sys	Running	OK	Normal	No	Yes		serial	Stopped	OK	Normal	No	No		udfs	Udfs c:\windows\system32\drivers\udfs.sys
	Kernel Driver Yes Boot								Serial port driver c:\windows\system32\drivers\serial.sys						File System Driver No Disabled	
	Running OK Normal No Yes								Kernel Driver No System						Stopped OK Normal No No	
rasacd	Remote Access Auto Connection Driver c:\windows\system32\drivers\rasacd.sys							Stopped OK Ignore No No							ultra	ultra Not Available Kernel Driver
	Kernel Driver Yes System								No Disabled Stopped OK						Normal No No	
	Running OK Normal No Yes								Kernel Driver No Manual						update	Microcode Update Driver c:\windows\system32\drivers\update.sys
rasl2tp	WAN Miniport (L2TP) c:\windows\system32\drivers\rasl2tp.sys							Stopped OK Normal No No							Kernel Driver Yes Manual	
	Kernel Driver Yes Manual								No Normal						Running OK Normal No Yes	
	Running OK Normal No Yes								Simbad Not Available Kernel Driver						usbccgp	Microsoft USB Generic Parent Driver c:\windows\system32\drivers\usbccgp.sys
rasppoe	Remote Access PPPoE Driver c:\windows\system32\drivers\rasppoe.sys								No Disabled Stopped OK						Kernel Driver Yes Manual	
	Kernel Driver Yes Manual								Normal No						Running OK Normal No Yes	
	Running OK Normal No Yes								Srv c:\windows\system32\drivers\srv.sys						usbehci	Microsoft USB 2.0 Enhanced Host Controller
raspti	Direct Parallel c:\windows\system32\drivers\raspti.sys								File System Driver Yes Manual						Driver	c:\windows\system32\drivers\usbehci.sys
	Kernel Driver Yes Manual								Running OK Normal No Yes						Kernel Driver Yes Manual	
	Running OK Normal No Yes								Software Bus Driver c:\windows\system32\drivers\swenum.sys						Running OK Normal No Yes	
rdbss	Rdbss c:\windows\system32\drivers\rdbss.sys								Kernel Driver Yes Manual						usbhub	Microsoft USB Standard Hub Driver c:\windows\system32\drivers\usbhub.sys
	File System Driver Yes System								Running OK Normal No Yes						Kernel Driver Yes Manual	
	Running OK Normal No Yes								symc8xx symc8xx Not Available Kernel Driver						usbohci	Microsoft USB Open Host Controller Miniport
rdpcdd	RDP CDD c:\windows\system32\drivers\rdpcdd.sys								No Disabled Stopped OK						Driver	c:\windows\system32\drivers\usbohci.sys
	Kernel Driver Yes System								Normal No						Running OK Normal No Yes	
	Running OK Ignore No Yes								symmpmi symmpmi Not Available Kernel Driver						usbstor	USB Mass Storage Driver c:\windows\system32\drivers\usbstor.sys
rdpdr	Terminal Server Device Redirector Driver c:\windows\system32\drivers\rdpdr.sys								No Disabled Stopped OK						Kernel Driver No Manual	
	Kernel Driver Yes Manual								Normal No						Stopped OK Normal No No	
	Running OK Normal No Yes								sym_hi sym_hi Not Available Kernel Driver						usbuhci	Microsoft USB Universal Host Controller
rdpwd	RDPWD c:\windows\system32\drivers\rdpwd.sys								No Disabled Stopped OK						Driver	c:\windows\system32\drivers\usbuhci.sys
	Kernel Driver Yes Manual								Normal No						Running OK Normal No Yes	
	Running OK Ignore No Yes								tcpip TCP/IP Protocol Driver c:\windows\system32\drivers\tcpip.sys						vga	vga c:\windows\system32\drivers\vgapnp.sys
redbook	Digital CD Audio Playback Filter Driver c:\windows\system32\drivers\redbook.sys								Kernel Driver Yes System						Kernel Driver No Manual	
	Kernel Driver Yes System								Running OK Normal No Yes						Running OK Normal No Yes	
	Running OK Normal No Yes								tdpipe TDPIPE c:\windows\system32\drivers\tdpipe.sys						vgasave	VGA Display Controller. c:\windows\system32\drivers\vga.sys
secdrv	Security Driver c:\windows\system32\drivers\secdrv.sys								Kernel Driver No Manual						Kernel Driver Yes System	
	Kernel Driver Yes Auto								Stopped OK Ignore No No						Running OK Ignore No Yes	
	Running OK Normal No Yes								tdtcp TDTCP c:\windows\system32\drivers\tdtcp.sys						viaide	Via IDE Not Available Kernel Driver
serenum	Serenum Filter Driver c:\windows\system32\drivers\serenum.sys								Kernel Driver Yes Manual						Normal No No	
	Kernel Driver No Manual								Running OK Ignore No Yes						Stopped OK Disabled Stopped OK	
	toside TosIDE Not Available Kernel Driver								No Disabled Stopped OK						Normal No No	
	Running OK Normal No No								Normal No No						Storage volumes c:\windows\system32\drivers\volsnap.sys	
															Kernel Driver Yes Boot	

Available	Not Available		STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902	STORAGE\VOLUME\1&30A96598&0&SIGNATUREC22173
	ROOT\LEGACY_HPCISS\0000		E2OFFSET10000LENGTHE29000000	9EOFFSET7E00LENGTHE2886C400
Generic	Packet Classifier	Not Available	Generic volume Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830
	LEGACYDRIVER	Not Available	10/1/2002 Microsoft volume.inf Not	10/1/2002 Microsoft volume.inf Not
Available	Not Available	Not Available	Available	Available
	ROOT\LEGACY_GPC\0000		STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902	STORAGE\VOLUME\1&30A96598&0&SIGNATUREC22173
Fips	Not Available	LEGACYDRIVER	E3OFFSET10000LENGTHHC90500000	9FOFFSET7E00LENGTHH1C8FCF0600
Available	Not Available	Not Available	Generic volume Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830
Available	Not Available	ROOT\LEGACY_FIPS\0000	10/1/2002 Microsoft volume.inf Not	10/1/2002 Microsoft volume.inf Not
dmload	Not Available	LEGACYDRIVER	Available	Available
Available	Not Available	Not Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902	STORAGE\VOLUME\1&30A96598&0&SIGNATUREC22173
Available	Not Available	ROOT\LEGACY_DMLOAD\0000	ECOFFSET7E00LENGTHB5F606CE00	9COFFSET7E00LENGTHH1C8FCF0600
dmboot	Not Available	LEGACYDRIVER	Generic volume Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830
Available	Not Available	Not Available	10/1/2002 Microsoft volume.inf Not	10/1/2002 Microsoft volume.inf Not
Available	Not Available	ROOT\LEGACY_DMBOOT\0000	Available	Available
CRC Disk Filter Driver	Not Available	LEGACYDRIVER	STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902	STORAGE\VOLUME\1&30A96598&0&SIGNATUREC134B3
	LEGACYDRIVER	Not Available	EDOOFFSET10000LENGTHE29000000	3BOFFSET10000LENGTHE29000000
Available	Not Available	Not Available	Generic volume Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830
Available	ROOT\LEGACY_CRCDISK\0000		10/1/2002 Microsoft volume.inf Not	10/1/2002 Microsoft volume.inf Not
CpuSpy3 Driver	Not Available	LEGACYDRIVER	Available	Available
	Not Available	Not Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902	STORAGE\VOLUME\1&30A96598&0&SIGNATUREC134B3
Available	Not Available	ROOT\LEGACY_CPSY3\0000	EFOOFFSET10000LENGTHHC90500000	3AOFFSET10000LENGTHH1C90500000
CdaD10BA	Not Available	LEGACYDRIVER	Generic volume Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830
Available	Not Available	Not Available	10/1/2002 Microsoft volume.inf Not	10/1/2002 Microsoft volume.inf Not
Available	Not Available	ROOT\LEGACY_CDAD10BA\0000	Available	Available
CdaC15BA	Not Available	LEGACYDRIVER	STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902	STORAGE\VOLUME\1&30A96598&0&SIGNATUREC134B3
Available	Not Available	Not Available	FBOFFSET10000LENGTHHC90500000	35OFFSET10000LENGTHE29000000
Available	Not Available	ROOT\LEGACY_CDAC15BA\0000	Generic volume Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830
Beep	Not Available	LEGACYDRIVER	10/1/2002 Microsoft volume.inf Not	10/1/2002 Microsoft volume.inf Not
Available	Not Available	Not Available	Available	Available
Available	Not Available	ROOT\LEGACY_BEEP\0000	STORAGE\VOLUME\1&30A96598&0&SIGNATURE80178A	STORAGE\VOLUME\1&30A96598&0&SIGNATUREC134B3
AFD	Not Available	LEGACYDRIVER	DLOOFFSET10000LENGTHE29000000	34OFFSET10000LENGTHH1C90500000
Available	Not Available	Not Available	Generic volume Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830
Available	Not Available	ROOT\LEGACY_AFD\0000	10/1/2002 Microsoft volume.inf Not	10/1/2002 Microsoft volume.inf Not
Generic volume	Yes	VOLUME 5.2.3790.1830	Available	Available
	10/1/2002 Microsoft volume.inf	Not	STORAGE\VOLUME\1&30A96598&0&SIGNATURE80178A	STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902
Available		STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902	DCOFFSET10000LENGTHE29000000	E8OFFSET10000LENGTHE29000000
D4OFFSET10000LENGTHCD00E00000	Generic volume	Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830
	10/1/2002 Microsoft volume.inf	Not	10/1/2002 Microsoft volume.inf Not	10/1/2002 Microsoft volume.inf Not
Available		Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE80178A	Available
06OFFSET4000LENGTH8787EC000	Generic volume	Yes VOLUME 5.2.3790.1830	DDOFFSET10000LENGTHHC90400000	E9OFFSET10000LENGTHH1C90500000
	10/1/2002 Microsoft volume.inf	Not	Generic volume Yes VOLUME 5.2.3790.1830	Generic volume Yes VOLUME 5.2.3790.1830
Available		Available	10/1/2002 Microsoft volume.inf Not	10/1/2002 Microsoft volume.inf Not
01OFFSET7E00LENGTHB5F606CE00	Storage	VOLUME\1&30A96598&0&SIGNATURE80178A	STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902	Available
	Generic volume	Yes VOLUME 5.2.3790.1830	98OFFSET7E00LENGTHE2886C400	STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902
Available		10/1/2002 Microsoft volume.inf	Generic volume Yes VOLUME 5.2.3790.1830	EAOFFSET10000LENGTHE29000000
	Not Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902	10/1/2002 Microsoft volume.inf Not	Generic volume Yes VOLUME 5.2.3790.1830
	Generic volume	Yes VOLUME 5.2.3790.1830	Available	10/1/2002 Microsoft volume.inf Not
Available		10/1/2002 Microsoft volume.inf	STORAGE\VOLUME\1&30A96598&0&SIGNATUREC22173	Available

STORAGE\VOLUME\1&30A96598&0&SIGNATURED7E902
 EBOFFSET10000LENGTH1C90500000
 Volume Manager Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ROOT\FDISK\0000
 Logical Disk Manager Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 ROOT\DMIO\0000
 ACPI Fixed Feature Button Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 ACPI\FIXEDBUTTON\2&DABA3FF&0
 Advanced programmable interrupt controller Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available ACPI\PNP0003\4
 Advanced programmable interrupt controller Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available ACPI\PNP0003\3
 Advanced programmable interrupt controller Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available ACPI\PNP0003\2
 System Interrupt Controller Not Available Not
 Available Not Available Not Available Not
 Available Not Available Not Available
 PCI\VEN_1022&DEV_7459&SUBSYS_74591022&REV_1
 2\3&3B859B7&0&89
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 28\5&68D3C3A&0&040
 HP Virtual LUN Yes SYSTEM 5.2.3790.1830
 10/1/2002 Compaq scsidev.inf Not
 Available
 SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
 &REV_CIS2\5&68D3C3A&0&000
 Smart Array P600 Controller No SCSIADAPTER
 5.12.0.64 7/13/2006 Hewlett-Packard Company
 oem41.inf Not Available
 PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
 0\4&24CF26B8&&01088
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_1022&DEV_7458&SUBSYS_00000000&REV_1
 2\3&3B859B7&0&88
 System Interrupt Controller Not Available Not
 Available Not Available Not Available Not
 Available Not Available Not Available
 PCI\VEN_1022&DEV_7459&SUBSYS_74591022&REV_1
 2\3&3B859B7&0&81
 HP NC371i Multifunction Gigabit Server Adapter No
 NET 2.8.13.0 6/30/2006 Hewlett-
 Packard Company oem35.inf Not Available

B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
 EV_02\5&2945E16&0&20054102
 HP NC371i Virtual Bus Device No SYSTEM
 2.8.15.0 7/12/2006 Hewlett-Packard Company
 oem38.inf Not Available
 PCI\VEN_14E4&DEV_164A&SUBSYS_1709103C&REV_0
 2\4&9C889E9&0&1080
 HP NC371i Multifunction Gigabit Server Adapter No
 NET 2.8.13.0 6/30/2006 Hewlett-
 Packard Company oem35.inf Not Available
 B06BDRV\L2ND&PCI_164A14E4&SUBSYS_1709103C&R
 EV_02\5&B64F98D&0&20054101
 HP NC371i Virtual Bus Device No SYSTEM
 2.8.15.0 7/12/2006 Hewlett-Packard Company
 oem38.inf Not Available
 PCI\VEN_14E4&DEV_164A&SUBSYS_1709103C&REV_0
 2\4&9C889E9&0&0880
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_1022&DEV_7458&SUBSYS_00000000&REV_1
 2\3&3B859B7&0&80
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&1172DAF7&0&090
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&1172DAF7&0&080
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&1172DAF7&0&070
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&1172DAF7&0&060
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&1172DAF7&0&050
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&1172DAF7&0&040
 HP Virtual LUN Yes SYSTEM 5.2.3790.1830
 10/1/2002 Compaq scsidev.inf Not
 Available
 SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
 &REV_CIS2\5&1172DAF7&0&000
 Smart Array P800 Controller No SCSIADAPTER
 5.12.0.64 7/13/2006 Hewlett-Packard Company
 oem41.inf Not Available

PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 2\4&3EC0CCA&0&0070
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
 3\3&3B859B7&0&70
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&35DCE581&0&050
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&35DCE581&0&040
 HP Virtual LUN Yes SYSTEM 5.2.3790.1830
 10/1/2002 Compaq scsidev.inf Not
 Available
 SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
 &REV_CIS2\5&35DCE581&0&000
 Smart Array P800 Controller No SCSIADAPTER
 5.12.0.64 7/13/2006 Hewlett-Packard Company
 oem41.inf Not Available
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 2\4&1B1CF5E7&0&068
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
 3\3&3B859B7&0&68
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&3A45A410&0&090
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&3A45A410&0&080
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&3A45A410&0&070
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&3A45A410&0&060
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 80\5&3A45A410&0&050
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)

```

disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&3A45A410&0&040
HP Virtual LUN Yes SYSTEM 5.2.3790.1830
10/1/2002 Compaq scsidev.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CIS2\5&3A45A410&0&000
Smart Array P800 Controller No SCSIADAPTER
5.12.0.64 7/13/2006 Hewlett-Packard Company
oem41.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&137ABAEAA&0&0060
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
3\3&3B859B7&0&60
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&2B93BC75&0&070
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&2B93BC75&0&060
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&2B93BC75&0&050
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&2B93BC75&0&040
HP Virtual LUN Yes SYSTEM 5.2.3790.1830
10/1/2002 Compaq scsidev.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CIS2\5&2B93BC75&0&000
Smart Array P800 Controller No SCSIADAPTER
5.12.0.64 7/13/2006 Hewlett-Packard Company
oem41.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&300C8240&0&0058
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
3\3&3B859B7&0&58
NVIDIA nForce4 Low Pin Count Controller Yes
SYSTEM 5.2.3790.1830 10/1/2002
NVIDIA machine.inf Not Available
PCI\VEN_10DE&DEV_00D3&SUBSYS_CB8410DE&REV_B
1\3&3B859B7&0&08

```

```

NVIDIA nForce4 HyperTransport Bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
NVIDIA machine.inf Not Available
PCI\VEN_10DE&DEV_005E&SUBSYS_00000000&REV_A
4\3&3B859B7&0&00
PCI bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\8
Advanced programmable interrupt controller Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
ACPI\PNP0003\1
AMD Miscellaneous Configuration Yes
SYSTEM 5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1103&SUBSYS_00000000&REV_0
0\3&20FEA912&0&DB
AMD DRAM and HyperTransport(tm) Trace Mode
Configuration Yes SYSTEM 5.2.3790.1830
10/1/2002 AMD machine.inf Not
Available
PCI\VEN_1022&DEV_1102&SUBSYS_00000000&REV_0
0\3&20FEA912&0&DA
AMD Address Map Configuration Yes SYSTEM
5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1101&SUBSYS_00000000&REV_0
0\3&20FEA912&0&D9
AMD HyperTransport(tm) Configuration Yes
SYSTEM 5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1100&SUBSYS_00000000&REV_0
0\3&20FEA912&0&D8
AMD Miscellaneous Configuration Yes
SYSTEM 5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1103&SUBSYS_00000000&REV_0
0\3&20FEA912&0&D3
AMD DRAM and HyperTransport(tm) Trace Mode
Configuration Yes SYSTEM 5.2.3790.1830
10/1/2002 AMD machine.inf Not
Available
PCI\VEN_1022&DEV_1102&SUBSYS_00000000&REV_0
0\3&20FEA912&0&D2
AMD Address Map Configuration Yes SYSTEM
5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1101&SUBSYS_00000000&REV_0
0\3&20FEA912&0&D1_
AMD HyperTransport(tm) Configuration Yes
SYSTEM 5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1100&SUBSYS_00000000&REV_0
0\3&20FEA912&0&D0
AMD Miscellaneous Configuration Yes
SYSTEM 5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1103&SUBSYS_00000000&REV_0
0\3&20FEA912&0&CB

```

```

AMD DRAM and HyperTransport(tm) Trace Mode
Configuration Yes SYSTEM 5.2.3790.1830
10/1/2002 AMD machine.inf Not
Available
PCI\VEN_1022&DEV_1102&SUBSYS_00000000&REV_0
0\3&20FEA912&0&CA
AMD Address Map Configuration Yes SYSTEM
5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1101&SUBSYS_00000000&REV_0
0\3&20FEA912&0&C9
AMD HyperTransport(tm) Configuration Yes
SYSTEM 5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1100&SUBSYS_00000000&REV_0
0\3&20FEA912&0&C8
AMD Miscellaneous Configuration Yes
SYSTEM 5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1103&SUBSYS_00000000&REV_0
0\3&20FEA912&0&C3
AMD DRAM and HyperTransport(tm) Trace Mode
Configuration Yes SYSTEM 5.2.3790.1830
10/1/2002 AMD machine.inf Not
Available
PCI\VEN_1022&DEV_1102&SUBSYS_00000000&REV_0
0\3&20FEA912&0&C2
AMD Address Map Configuration Yes SYSTEM
5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1101&SUBSYS_00000000&REV_0
0\3&20FEA912&0&C1
AMD HyperTransport(tm) Configuration Yes
SYSTEM 5.2.3790.1830 10/1/2002 AMD
machine.inf Not Available
PCI\VEN_1022&DEV_1100&SUBSYS_00000000&REV_0
0\3&20FEA912&0&C0
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&335B0ED3&0&070
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&335B0ED3&0&060
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&335B0ED3&0&050
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&335B0ED3&0&040
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&335B0ED3&0&040
HP Virtual LUN Yes SYSTEM 5.2.3790.1830
10/1/2002 Compaq scsidev.inf Not
Available

```

```

SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CIS2\5&335B0ED3&0&000
Smart Array P800 Controller No SCSIADAPTER
5.12.0.64 7/13/2006 Hewlett-Packard Company
oem41.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&13700CED0&0070
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
3\3&20FEA912&0&70
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&215A405&0&090
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&215A405&0&080
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&215A405&0&070
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&215A405&0&060
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&215A405&0&050
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&215A405&0&040
HP Virtual LUN Yes SYSTEM 5.2.3790.1830
10/1/2002 Compaq scsiedev.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CIS2\5&215A405&0&000
Smart Array P800 Controller No SCSIADAPTER
5.12.0.64 7/13/2006 Hewlett-Packard Company
oem41.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&B98F5C4&0&0068
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
3\3&20FEA912&0&68
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)

```

```

disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
80\5&1F391F1F&0&040
HP Virtual LUN Yes SYSTEM 5.2.3790.1830
10/1/2002 Compaq scsiedev.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CIS2\5&1F391F1F&0&000
Smart Array BUMPERLITE Controller No
SCSIADAPTER 5.99.0.64 7/17/2006
Hewlett-Packard Company oem42.inf Not
Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&22FEBB0D&0&0060
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10DE&DEV_005D&SUBSYS_00000000&REV_A
3\3&20FEA912&0&60
HP ProLiant iLO 2 Management Controller Driver No
SYSTEM 1.1.0.0 4/14/2006 Hewlett-
Packard Company oem18.inf Not Available
PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0
0\4&21887AE0&0&2648
Generic USB Hub Yes USB 5.2.3790.1830
10/1/2002 (Generic USB Hub) usb.inf Not
Available USB\VID_03F0&PID_1327\6&5F1B1E&0&2
HID-compliant mouse Yes MOUSE 5.2.3790.1830
10/1/2002 Microsoft msmouse.inf Not
Available
HID\VID_03F0&PID_1027&MI_01\8&AACF5F7&0&000
0
USB Human Interface Device Yes HIDCLASS
5.2.3790.1830 10/1/2002 (Standard
system devices) input.inf Not Available
USB\VID_03F0&PID_1027&MI_01\7&3B124F76&0&00
01
HID Keyboard Device Yes KEYBOARD 5.2.3790.1830
10/1/2002 (Standard keyboards)
keyboard.inf Not Available
HID\VID_03F0&PID_1027&MI_00\8&2270823C&0&00
00
USB Human Interface Device Yes HIDCLASS
5.2.3790.1830 10/1/2002 (Standard
system devices) input.inf Not Available
USB\VID_03F0&PID_1027&MI_00\7&3B124F76&0&00
00
USB Composite Device Yes USB
5.2.3790.1830 10/1/2002 (Standard USB
Host Controller) usb.inf Not Available
USB\VID_03F0&PID_1027\6&5F1B1E&0&1
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\5&246EAE08&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available

```

```

PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0
0\4&21887AE0&0&2448
Base System Device Not Available Not Available
Not Available Not Available Not Available
PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0
3\4&21887AE0&0&2248
HP ProLiant iLO 2 Legacy Support Function No
SYSTEM 1.1.0.0 4/14/2006 Hewlett-
Packard Company oem18.inf Not Available
PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0
3\4&21887AE0&0&2048
Plug and Play Monitor Yes MONITOR
5.2.3790.1830 10/1/2002 (Standard
monitor types) monitor.inf Not Available
DISPLAY\AVO0000\5&292E0C71&0&10000080&01&03
Default Monitor Yes MONITOR 5.2.3790.1830
10/1/2002 (Standard monitor types)
monitor.inf Not Available
DISPLAY\DEFAULT_MONITOR\5&292E0C71&0&100000
01&01&03
ATI ES1000 Yes DISPLAY 8.19.4.0
12/6/2005 ATI Technologies Inc.
oem17.inf Not Available
PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
2\4&21887AE0&0&1848
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_10DE&DEV_005C&SUBSYS_00000000&REV_A
2\3&20FEA912&0&648
Secondary IDE Channel Yes HDC
5.2.3790.1830 10/1/2002 (Standard IDE
ATA/ATAPI controllers) mshdc.inf Not Available
PCIIDE\IDECHANNEL\4&23A0739C&0&1
CD-ROM Drive Yes CDROM 5.2.3790.1830
10/1/2002 (Standard CD-ROM drives)
cdrom.inf Not Available
IDE\CDROMTEAC_DV-28E-
N C.6B__\5&2270D2F8&0&0.0
.0
Primary IDE Channel Yes HDC 5.2.3790.1830
10/1/2002 (Standard IDE ATA/ATAPI
controllers) mshdc.inf Not Available
PCIIDE\IDECHANNEL\4&23A0739C&0&0
Standard Dual Channel PCI IDE Controller Yes
HDC 5.2.3790.1830 10/1/2002
(Standard IDE ATA/ATAPI controllers)
mshdc.inf Not Available
PCI\VEN_10DE&DEV_0053&SUBSYS_31F8103C&REV_A
3\3&20FEA912&0&630
Generic USB Hub Yes USB 5.2.3790.1830
10/1/2002 (Generic USB Hub) usb.inf Not
Available USB\VID_04B4&PID_6560\5&2941608A&0&6
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB20\4&26DB321C&0

```

```

Standard Enhanced PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_10DE&DEV_005B&SUBSYS_31F8103C&REV_A
4\3&20FEA912&0&11
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&1EFC638D&0
Standard OpenHCD USB Host Controller Yes USB
5.2.3790.1830 10/1/2002 (Standard USB
Host Controller) usbport.inf Not Available
PCI\VEN_10DE&DEV_005A&SUBSYS_31F8103C&REV_A
2\3&20FEA912&0&10
Floppy disk drive Yes FLOPPYDISK
5.2.3790.1830 10/1/2002 (Standard
floppy disk drives) fipydisk.inf Not Available
FDC\GENERIC_FLOPPY_DRIVE\6&211CE946&0&0
Standard floppy disk controller Yes FDC
5.2.3790.1830 10/1/2002 (Standard
floppy disk controllers) fdc.inf Not Available
ACPI\PNP0700\5&23664957&0
Extended IO Bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A06\4&142B453B&0
PS/2 Compatible Mouse Yes MOUSE
5.2.3790.1830 10/1/2002 Microsoft
msmouse.inf Not Available
ACPI\PNP0P13\4&142B453B&0
Standard 101/102-Key or Microsoft Natural PS/2
Keyboard Yes KEYBOARD 5.2.3790.1830
10/1/2002 (Standard keyboards)
keyboard.inf Not Available
ACPI\PNP0303\4&142B453B&0
System speaker Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0800\4&142B453B&0
Direct memory access controller Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
ACPI\PNP0200\4&142B453B&0
High precision event timer Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ACPI\PNP0103\0
System timer Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0100\4&142B453B&0
Not Available Not Available Not Available
Not Available Not Available Not Available
Available Not Available Not Available
ACPI\IPI0001\0
Motherboard resources Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ACPI\PNP0C02\0

```

```

PCI standard ISA bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_10DE&DEV_0051&SUBSYS_00000000&REV_B
1\3&20FEA912&0&08
NVIDIA nForce4 HyperTransport Bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
NVIDIA machine.inf Not Available
PCI\VEN_10DE&DEV_005E&SUBSYS_00000000&REV_A
4\3&20FEA912&0&00
PCI bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\7
Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 (Standard processor types)
cpu.inf Not Available
ACPI\AUTHENTICAMD_-
_AMD64_FAMILY_15_MODEL_65\_\_7
Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 (Standard processor types)
cpu.inf Not Available
ACPI\AUTHENTICAMD_-
_AMD64_FAMILY_15_MODEL_65\_\_6
Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 (Standard processor types)
cpu.inf Not Available
ACPI\AUTHENTICAMD_-
_AMD64_FAMILY_15_MODEL_65\_\_5
Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 (Standard processor types)
cpu.inf Not Available
ACPI\AUTHENTICAMD_-
_AMD64_FAMILY_15_MODEL_65\_\_4
Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 (Standard processor types)
cpu.inf Not Available
ACPI\AUTHENTICAMD_-
_AMD64_FAMILY_15_MODEL_65\_\_3
Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 (Standard processor types)
cpu.inf Not Available
ACPI\AUTHENTICAMD_-
_AMD64_FAMILY_15_MODEL_65\_\_2
Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 (Standard processor types)
cpu.inf Not Available
ACPI\AUTHENTICAMD_-
_AMD64_FAMILY_15_MODEL_65\_\_1
Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 (Standard processor types)
cpu.inf Not Available
ACPI\AUTHENTICAMD_-
_AMD64_FAMILY_15_MODEL_65\_\_0
Microsoft ACPI-Compliant System Yes
SYSTEM 5.2.3790.1830 10/1/2002
Microsoft acpi.inf Not Available
ACPI_HAL\PNPC08\0
ACPI Multiprocessor x64-based PC Yes
COMPUTER 5.2.3790.1830 10/1/2002

```

```

(Standard computers) hal.inf Not
Available ROOT\ACPI_HAL\0000
Not Available Not Available Not Available
Not Available Not Available Not Available
Available Not Available Not Available
HTREE\ROOT\0
[Environment Variables]
Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path %SystemRoot%\system32;%SystemRoot%&%;SystemRoot%\System32\Wbem;C:\Program Files (x86)\Microsoft SQL Server\80\Tools\Binn\;C:\Program Files\Microsoft SQL Server\90\Tools\binn\;C:\Program Files (x86)\Microsoft SQL Server\90\Tools\Binn\;C:\Program Files (x86)\Microsoft SQL Server\90\DTs\Binn\;C:\Program Files (x86)\Microsoft SQL Server\90\Tools\Binn\VSShell\Common7\IDE\;C:\Program Files (x86)\Microsoft Visual Studio 8\Common7\IDE\PrivateAssemblies\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
FP_NO_HOST_CHECK NO <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE AMD64 <SYSTEM>
PROCESSOR_LEVEL 15 <SYSTEM>
PROCESSOR_IDENTIFIER AMD64 Family 15 Model 65 Stepping 2, AuthenticAMD <SYSTEM>
PROCESSOR_REVISION 4102 <SYSTEM>
NUMBER_OF_PROCESSORS 8 <SYSTEM>
ClusterLog C:\WINDOWS\Cluster\cluster.log <SYSTEM>
PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
; WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\ <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
LONGSHOT\Administrator
TMP %USERPROFILE%\Local Settings\Temp
LONGSHOT\Administrator
[Print Jobs]
Document Size Owner Notify Status
Time Submitted Start Time
Until Time Elapsed Time
Pages Printed Job ID Priority

```

Processor	Host	Print Queue	Driver	Print Data Type	Name
[Network Connections]					
Local Name	Remote Name	Type	Status	User Name	
[Running Tasks]					
Name	Path	Process ID	Priority	Min Working Set	Start Time
		Version	Size	File Date	
system	idle process	Not Available	0	0	
	Not Available	Not Available	Not Available		
Available	Not Available	Not Available	Not Available		
Available	Not Available	Not Available	Not Available		
system	Not Available	4	8	0	
	1413120	Not Available	Not Available		
	Not Available	Not Available	Not Available		
smss.exe	Not Available	712	11		
	204800	1413120	9/18/2006 11:45 AM	Not Available	
Available	Not Available	Not Available	Not Available		
csrss.exe	Not Available	840	13	Not Available	
Available	Not Available	9/18/2006 11:45 AM	Not Available		
Available	Not Available	Not Available	Not Available		
winlogon.exe	c:\windows\system32\winlogon.exe	440	13	204800	1413120
	9/18/2006 11:46 AM	5.2.3790.1830			
(srv03_spl_rtm.050324-1447)		901.00 KB	(922,624 bytes)		
bytes)	c:\windows\system32\services.exe	516	9	204800	1413120
	9/18/2006 11:46 AM	5.2.3790.1830			
(srv03_spl_rtm.050324-1447)		216.50 KB	(221,696 bytes)		
bytes)	c:\windows\system32\lsass.exe	572	9	204800	1413120
	9/18/2006 11:46 AM	5.2.3790.1830			
	14.00 KB	(14,336 bytes)		3/25/2005	
6:00 AM	svchost.exe	c:\windows\system32\svchost.exe	792	8	204800 1413120
	9/18/2006 11:46 AM	5.2.3790.1830			
(srv03_spl_rtm.050324-1447)		24.50 KB	(25,088 bytes)		
3/25/2005 6:00 AM					
svchost.exe	Not Available	880	8		
	Not Available	Not Available	Not Available		
9/18/2006 11:46 AM	Not Available	Not Available	Not Available		
Available	Not Available	Not Available	Not Available		
svchost.exe	c:\windows\system32\svchost.exe	952	8	204800	1413120
	9/18/2006 11:46 AM	5.2.3790.1830			
(srv03_spl_rtm.050324-1447)		24.50 KB	(25,088 bytes)		
3/25/2005 6:00 AM					
msdtc.exe	Not Available	1328	8	Not Available	
Available	Not Available	9/18/2006 11:46 AM	Not Available		
Available	Not Available	Not Available	Not Available		
svchost.exe	c:\windows\system32\svchost.exe	1464	8	204800	1413120
	9/18/2006 11:46 AM	5.2.3790.1830			

```
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
sysdown.exe c:\windows\system32\sysdown.exe
1504 8 204800 1413120
9/18/2006 11:46 AM 1.0.0.0 built by:
buildsrv 42.50 KB (43,520 bytes) 5/5/2006
10:48 AM
tssdis.exe c:\windows\system32\tssdis.exe
1584 8 204800 1413120
9/18/2006 11:46 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 97.50 KB (99,840 bytes)
1/5/2006 11:23 AM
svchost.exe c:\windows\system32\svchost.exe
1976 8 204800 1413120
9/18/2006 11:46 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
wmiprvse.exe Not Available 1888 8
Not Available Not Available Not Available
9/18/2006 11:47 AM Not Available Not Available
Available Not Available
logon.scr Not Available 296 4 Not Available
Available Not Available 9/18/2006 11:56 AM Not Available
Available Not Available Not Available
csrss.exe Not Available 1184 13 Not Available
Available Not Available 9/18/2006 12:18 PM Not Available
Available Not Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe
344 13 204800 1413120
9/18/2006 12:18 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 901.00 KB (922,624 bytes)
3/25/2005 6:00 AM
services.exe c:\windows\system32\services.exe
516 9 204800 1413120
9/18/2006 11:46 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 216.50 KB (221,696 bytes)
3/25/2005 6:00 AM
lsass.exe c:\windows\system32\lsass.exe 572 9
204800 1413120 9/18/2006 11:46 AM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
14.00 KB (14,336 bytes) 3/25/2005
6:00 AM
svchost.exe c:\windows\system32\svchost.exe
792 8 204800 1413120
9/18/2006 11:46 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
svchost.exe Not Available 880 8
Not Available Not Available Not Available
9/18/2006 11:46 AM Not Available Not Available
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
952 8 204800 1413120
9/18/2006 11:46 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
msdtc.exe Not Available 1328 8 Not Available
Available Not Available 9/18/2006 11:46 AM Not Available
Available Not Available Not Available
svchost.exe c:\windows\system32\svchost.exe
1464 8 204800 1413120
9/18/2006 11:46 AM 5.2.3790.1830
```

Name	Version	Size	File Path	Date Manufactured
winlogon	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	901.00 KB (922,624 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\winlogon.exe	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.20 MB (1,257,472 bytes)
ntdll	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\ntdll.dll	1.20 MB (1,257,472 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\kernel32.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.43 MB (1,500,160 bytes)
kernel32	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\kernel32.dll	1.43 MB (1,500,160 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\advapi32.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.00 MB (1,051,136 bytes)
advapi32	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\advapi32.dll	1.00 MB (1,714,176 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\rpcrt4.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.63 MB (1,714,176 bytes)
rpcrt4	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\rpcrt4.dll	1.63 MB (1,714,176 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\crypt32.dll	5.13.3790.1830 (srv03_spl_rtm.050324-1447)	1.36 MB (1,428,992 bytes)
crypt32	5.13.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\crypt32.dll	1.36 MB (1,428,992 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\msasn1.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	152.50 KB (156,160 bytes)
msasn1	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\msasn1.dll	152.50 KB (156,160 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\msvcr7.dll	5.0.3790.1830 (srv03_spl_rtm.050324-1447)	508.00 KB (520,192 bytes)
msvcr7	5.0.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\msvcr7.dll	508.00 KB (520,192 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\user32.dll	5.0.3790.1830 (srv03_spl_rtm.050324-1447)	1.04 MB (1,085,952 bytes)
user32	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\user32.dll	1.04 MB (1,085,952 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\gdi32.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	592.00 KB (606,208 bytes)
gdi32	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\gdi32.dll	592.00 KB (606,208 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\nddeapi.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	25.00 KB (25,600 bytes)
nddeapi	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\nddeapi.dll	25.00 KB (25,600 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\profmap.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	36.00 KB (36,864 bytes)
profmap	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\profmap.dll	36.00 KB (36,864 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\netapi32.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	589.00 KB (603,136 bytes)
netapi32	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\netapi32.dll	589.00 KB (603,136 bytes)
6:00 AM	Microsoft Corporation	c:\windows\system32\userenv.dll	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.02 MB (1,069,056 bytes)
userenv	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	c:\windows\system32\userenv.dll	1.02 MB (1,069,056 bytes)

6:00 AM	Microsoft Corporation	c:\windows\system32\userenv.dll	
psapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	29.00 KB (29,696 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\psapi.dll	
regapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	108.50 KB (111,104 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\regapi.dll	
secur32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	120.00 KB (122,880 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\secur32.dll	
setupapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.45 MB (1,523,200 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\setupapi.dll	
version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	28.00 KB (28,672 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\version.dll	
winsta	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	89.00 KB (91,136 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\winsta.dll	
ws2_32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	176.50 KB (180,736 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\ws2_32.dll	
ws2help	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	30.50 KB (31,232 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\ws2help.dll	
msgina	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.14 MB (1,193,472 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msgina.dll	
shsvcs	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	193.50 KB (198,144 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\shsvcs.dll	
shlwapi	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	606.50 KB (621,056 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\shlwapi.dll	
sfc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	6.00 KB (6,144 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\sfc.dll	
sfc_os	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	183.50 KB (187,904 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\sfc_os.dll	
wintrust	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	297.50 KB (304,640 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wintrust.dll	
imagehlp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	57.50 KB (58,880 bytes)	3/25/2005

6:00 AM	Microsoft Corporation	c:\windows\system32\imagehlp.dll	
ole32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	2.43 MB (2,543,616 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\ole32.dll	
comctl32	6.0 (srv03_sp1_rtm.050324-1447)	1.51 MB (1,584,128 bytes)	1/5/2006 5:09
AM	Microsoft Corporation	c:\windows\winsxs\amd64_microsoft.windows.common-controls_6595b64144ccf1df_6.0.3790.1830_x-ww_4d792d2a\comctl32.dll	
winscard	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	230.00 KB (235,520 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\winscard.dll	
wtsapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	29.00 KB (29,696 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wtsapi32.dll	
winmm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	303.50 KB (310,784 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\winmm.dll	
shell32	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	10.01 MB (10,492,416 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\shell32.dll	
sxs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.91 MB (2,003,968 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\sxs.dll	
wldap32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	390.00 KB (399,360 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wldap32.dll	
rsaenh	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	241.96 KB (247,768 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rsaenh.dll	
cscdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	151.50 KB (155,136 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\cscdll.dll	
dimsntfy	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	28.00 KB (28,672 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\dimsntrfy.dll	
wlnotify	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	148.00 KB (151,552 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wlnotify.dll	
mpr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	115.00 KB (117,760 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\mpr.dll	
oleaut32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.06 MB (1,116,160 bytes)	3/25/2005 6:00 AM
bytes)	c:\windows\system32\oleaut32.dll		Microsoft Corporation
winspool	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	247.00 KB (252,928 bytes)	3/25/2005

6:00 AM	Microsoft Corporation	c:\windows\system32\winspool.drv	
comctl32	5.82 (srv03_sp1_rtm.050324-1447)	934.50 KB (956,928 bytes)	1/5/2006 5:09
AM	Microsoft Corporation	c:\windows\winsxs\amd64_microsoft.windows.common-controls_6595b64144ccf1df_5.82.3790.1830_x-ww_4d792d2a\comctl32.dll	
uxtheme	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	494.50 KB (506,368 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\uxtheme.dll	
clbcatq	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	865.00 KB (885,760 bytes)	1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\clbcatq.dll	
comres	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	779.50 KB (798,208 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\comres.dll	
wbemprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	38.00 KB (38,912 bytes)	1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemprox.dll	
wbemcomm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	524.00 KB (536,576 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemcomm.dll	
xpssp2res	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	2.77 MB (2,899,456 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\xpssp2res.dll	
wbemsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	58.00 KB (59,392 bytes)	1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemsvc.dll	
fastprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	866.50 KB (887,296 bytes)	1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\fastprox.dll	
msvcp60	7.0.3790.1830 (srv03_sp1_rtm.050324-1447)	919.50 KB (941,568 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msvcp60.dll	
ntdsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	127.50 KB (130,560 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\ntdsapi.dll	
dnsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	297.50 KB (304,640 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\dnsapi.dll	
services	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	216.50 KB (221,696 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\services.exe	
ncobjapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	80.00 KB (81,920 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\ncobjapi.dll	

scesrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 594.50 KB (608,768 bytes)	3/25/2005	kerberos	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 698.00 KB (714,752 bytes)	3/25/2005	hnetcfg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 561.00 KB (574,464 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\scesrv.dll		6:00 AM	Microsoft Corporation c:\windows\system32\kerberos.dll		6:00 AM	Microsoft Corporation c:\windows\system32\hnetcfg.dll	
authz	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 167.00 KB (171,008 bytes)	3/25/2005	msv1_0	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 253.00 KB (259,072 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\wshtcpip.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\authz.dll		6:00 AM	Microsoft Corporation c:\windows\system32\msv1_0.dll		6:00 AM	Microsoft Corporation c:\windows\system32\pstorsvc.dll	
umpnmpmgr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 205.00 KB (209,920 bytes)	3/25/2005	iphlpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 177.00 KB (181,248 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\psbase.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\umpnmpmgr.dll		6:00 AM	Microsoft Corporation c:\windows\system32\iphlpapi.dll		6:00 AM	Microsoft Corporation c:\windows\system32\dsenh.dll	
eventlog	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 127.00 KB (130,048 bytes)	3/25/2005	netlogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 666.00 KB (681,984 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\svchost.exe	
6:00 AM	Microsoft Corporation c:\windows\system32\eventlog.dll		w32time	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 400.50 KB (410,112 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\RPCSS.dll	
cabinet	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 138.50 KB (141,824 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\w32time.dll		6:00 AM	Microsoft Corporation c:\windows\system32\kdcsvc.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\cabinet.dll		schannel	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 248.00 KB (253,952 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\ntmarta.dll	
cryptnet	5.131.3790.1830 (srv03_sp1_rtm.050324-1447) 108.50 KB (111,104 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\wdigest.dll		6:00 AM	Microsoft Corporation c:\windows\system32\wkssvc.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\cryptnet.dll		rassfm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 36.00 KB (36,864 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\esent.dll	
sensapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 10.50 KB (10,752 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\wdigest.dll		6:00 AM	Microsoft Corporation c:\windows\system32\wiaRPC.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\sensapi.dll		wdigest	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 130.50 KB (133,632 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\cryptsvc.dll	
imm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 208.00 KB (212,992 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\kdcsvc.dll		6:00 AM	Microsoft Corporation c:\windows\system32\ntmarta.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\imm32.dll		ntdsa	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.81 MB (2,948,096 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\wkssvc.dll	
apphelp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 241.00 KB (246,784 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\ntds.dll		6:00 AM	Microsoft Corporation c:\windows\system32\cryptsvc.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\apphelp.dll		esent	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.26 MB (2,366,976 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\certcli.dll	
lsass	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 14.00 KB (14,336 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\esent.dll		6:00 AM	Microsoft Corporation c:\windows\system32\atl.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\lsass.exe		ntdsatq	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 51.00 KB (52,224 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\cryptsvc.dll	
lsasrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.50 MB (1,568,256 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\ntdsatq.dll		6:00 AM	Microsoft Corporation c:\windows\system32\atl.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\lsasrv.dll		mswsock	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 478.00 KB (489,472 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\certcli.dll	
samlib	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 69.00 KB (70,656 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\mswsock.dll		6:00 AM	Microsoft Corporation c:\windows\system32\cryptsvc.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\samlib.dll		scecli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 308.00 KB (315,392 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\cryptsvc.dll	
samsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.01 MB (1,059,328 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\scecli.dll		6:00 AM	Microsoft Corporation c:\windows\system32\atl.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\samsrv.dll		cryptdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 47.00 KB (48,128 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\cryptsvc.dll	
cryptdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 47.00 KB (48,128 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\ws03res.dll		6:00 AM	Microsoft Corporation c:\windows\system32\certcli.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\cryptdll.dll		6:00 AM	Microsoft Corporation c:\windows\system32\ws03res.dll		6:00 AM	Microsoft Corporation c:\windows\system32\cryptsvc.dll	
msprivs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 47.50 KB (48,640 bytes)	3/25/2005	6:00 AM	Microsoft Corporation c:\windows\system32\ws03res.dll		6:00 AM	Microsoft Corporation c:\windows\system32\atl.dll	
6:00 AM	Microsoft Corporation c:\windows\system32\msprivs.dll					6:00 AM	Microsoft Corporation c:\windows\system32\cryptsvc.dll	

6:00 AM	Microsoft Corporation	c:\windows\system32\es.dll
srsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	156.50 KB (160,256 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\srvsvc.dll
wmisvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	227.00 KB (232,448 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\wmisvc.dll
sens	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	63.50 KB (65,024 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\sens.dll
comsvcs	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	2.06 MB (2,156,544 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\comsvcs.dll
wbemcore	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.24 MB (1,299,968 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemcore.dll
esscli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	626.50 KB (641,536 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\esscli.dll
wmiutils	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	171.00 KB (175,104 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\wmiutils.dll
repdrvfs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	353.50 KB (361,984 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\repdrvfs.dll
wmiprvsd	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	743.00 KB (760,832 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\wmiprvsd.dll
wbemess	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	532.50 KB (545,280 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemess.dll
ncprov	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	73.00 KB (74,752 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\wbem\ncprov.dll
netman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	457.00 KB (467,968 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\netman.dll
mprapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	154.50 KB (158,208 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\mprapi.dll
activeds	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	348.50 KB (356,864 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\activeds.dll
adslpdc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	240.50 KB (246,272 bytes) 3/25/2005

6:00 AM	Microsoft Corporation	c:\windows\system32\adsldpc.dll
credui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	202.00 KB (206,848 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\credui.dll
rtutil	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	66.00 KB (67,584 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rtutil.dll
netshell	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	2.32 MB (2,437,120 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\netshell.dll
clusapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	127.00 KB (130,048 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\clusapi.dll
rasapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	410.00 KB (419,840 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rasapi32.dll
rasman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	95.50 KB (97,792 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rasman.dll
tapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	332.50 KB (340,480 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\tapi32.dll
wininet	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.13 MB (1,186,304 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wininet.dll
wzcsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	49.00 KB (50,176 bytes) 3/24/2005
11:35 AM	Microsoft Corporation	c:\windows\system32\wzcsapi.dll
wzcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	492.00 KB (503,808 bytes) 3/24/2005
11:35 AM	Microsoft Corporation	c:\windows\system32\wzcsvc.dll
wmi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	5.50 KB (5,632 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wmi.dll
dhcpcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	219.00 KB (224,256 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\dhcpcsvc.dll
rasdlg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	859.50 KB (880,128 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rasdlg.dll
pchsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	76.00 KB (77,824 bytes) 1/5/2006
11:26 AM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\pchsvc.dll
wbemcons	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	65.50 KB (67,072 bytes) 1/5/2006

11:23 AM	Microsoft Corporation	c:\windows\system32\wbemcons.dll
ersvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	31.00 KB (31,744 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\ersvc.dll
sysdown	1.0.0.0 built by: buildsrv	42.50 KB (43,520 bytes) 5/5/2006 10:48 AM Hewlett-Packard Company c:\windows\system32\sysdown.exe
tssdis	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	97.50 KB (99,840 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\tssdis.exe
resutils	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	98.50 KB (100,864 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\resutils.dll
termsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	345.50 KB (363,008 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\termsrv.dll
icaapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	27.50 KB (28,160 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\icaapi.dll
mstlsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	187.00 KB (191,488 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\mstlsapi.dll
rdpwsx	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	170.13 KB (174,216 bytes) 1/5/2006
11:23 AM	Microsoft Corporation	c:\windows\system32\rdpwsx.dll
rdpsnd	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	25.00 KB (25,600 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rdpsnd.dll
scredir	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	38.50 KB (39,424 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\scredir.dll
cscui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	441.00 KB (451,584 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\cscui.dll
msacm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	31.00 KB (31,744 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msacm32.drv
msacm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	112.00 KB (114,688 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msacm32.dil
imaadp32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	24.00 KB (24,576 bytes) 3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\imaadp32.acm
msadp32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	23.50 KB (24,064 bytes) 3/25/2005

6:00 AM	Microsoft Corporation c:\windows\system32\msadp32.acm	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 13.50 KB (13,824 bytes) 3/25/2005
msg711		5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 34.50 KB (35,328 bytes) 3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\msg711.acm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 34.50 KB (35,328 bytes) 3/25/2005
msgsm32		5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 34.50 KB (35,328 bytes) 3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\msgsm32.acm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 34.50 KB (35,328 bytes) 3/25/2005
tssoft32		1.01 13.50 KB (13,824 bytes) 3/25/2005 6:00 AM DSP GROUP, INC. c:\windows\system32\tssoft32.acm
tsd32		1.03 24.50 KB (25,088 bytes) 3/25/2005 6:00 AM DSP GROUP, INC. c:\windows\system32\tsd32.dll
rdpclip		5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 99.00 KB (101,376 bytes) 1/5/2006
11:23 AM	Microsoft Corporation c:\windows\system32\rdpclip.exe	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 24.50 KB (25,088 bytes) 3/25/2005
wsock32		5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 24.50 KB (25,088 bytes) 3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\wsock32.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.02 MB (1,074,176 bytes) 3/25/2005
urlmon		6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 1.30 MB (1,364,480 bytes) 3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\urlmon.dll	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 1.30 MB (1,364,480 bytes) 3/25/2005
explorer		6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 2.30 MB (2,416,128 bytes) 3/25/2005
6:00 AM	Microsoft Corporation c:\windows\explorer.exe	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 1.53 MB (1,601,536 bytes) 3/25/2005
browseui		6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 530.50 KB (543,232 bytes) 3/25/2005
shdocvw		6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 705.50 KB (722,432 bytes) 3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\cryptui.dll	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 530.50 KB (543,232 bytes) 3/25/2005
themeui		6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 6.50 KB (6,656 bytes) 3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\msimg32.dll	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 30.00 KB (30,720 bytes) 3/25/2005
linkinfo		6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 184.00 KB (188,416 bytes) 3/25/2005
ntshrui		6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 184.00 KB (188,416 bytes) 3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\ntshrui.dll	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 184.00 KB (188,416 bytes) 3/25/2005
	webcheck	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 439.00 KB (449,536 bytes) 3/25/2005
	stobject	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 142.50 KB (145,920 bytes) 3/25/2005
	batmeter	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 41.50 KB (42,496 bytes) 3/25/2005
	powrprof	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 32.50 KB (33,280 bytes) 3/25/2005
	drprov	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 24.00 KB (24,576 bytes) 3/25/2005
	ntlanman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 71.50 KB (73,216 bytes) 3/25/2005
	netui0	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 130.00 KB (133,120 bytes) 3/25/2005
	netutil	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 338.50 KB (346,624 bytes) 3/25/2005
	netui1	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 63.00 KB (64,512 bytes) 3/25/2005
	davclnt	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 38.00 KB (38,912 bytes) 3/25/2005
	browselc	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 63.00 KB (64,512 bytes) 3/25/2005
	shdoclc	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 589.50 KB (603,648 bytes) 3/25/2005
	mlang	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 686.00 KB (702,464 bytes) 3/25/2005
	mydocs	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 101.00 KB (103,424 bytes) 3/25/2005
	zipfldr	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 449.50 KB (460,288 bytes) 3/25/2005
	actxprxy	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 220.50 KB (225,792 bytes) 3/25/2005
		6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 636.00 KB (651,264 bytes) 1/5/2006
	mmcshext	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 75.50 KB (77,312 bytes) 3/25/2005
	hhsetup	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 78.00 KB (79,872 bytes) 3/25/2005
	cpqteam	8.40.0.24 59.50 KB (60,928 bytes) 7/19/2006 5:13 AM Hewlett-Packard Company c:\windows\system32\cpqteam.exe
	helpctr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.30 MB (1,363,456 bytes) 1/5/2006
	r.exe	c:\windows\pchealth\helpctr\binaries\helpct r.exe
	hcappres	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 7.50 KB (7,680 bytes) 1/5/2006
	es.dll	c:\windows\pchealth\helpctr\binaries\hcapp res.dll
	itss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 208.00 KB (212,992 bytes) 3/25/2005
	msxml3	8.70.1104.0 2.04 MB (2,141,184 bytes) 3/25/2005 6:00 AM Microsoft Corporation c:\windows\system32\msxml3.dll
	pchshell	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 155.00 KB (158,720 bytes) 1/5/2006
	11:26 AM	Microsoft Corporation c:\windows\pchealth\helpctr\binaries\pchshe ll.dll
	mshtml	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 5.65 MB (5,928,448 bytes) 3/25/2005
	mslsl31	c:\windows\system32\mshtml.dll
	bytes)	3.10.349.0 357.00 KB (365,568 bytes) 3/25/2005 6:00 AM Microsoft Corporation c:\windows\system32\mslsl31.dll
	msimtf	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 380.50 KB (389,632 bytes) 3/25/2005
	6:00 AM	Microsoft Corporation c:\windows\system32\msimtf.dll
	msctf	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 617.50 KB (632,320 bytes) 3/25/2005
	6:00 AM	Microsoft Corporation c:\windows\system32\msctf.dll
	jscript	5.6.0.8827 974.50 KB (997,888 bytes) 3/25/2005 6:00 AM Microsoft Corporation c:\windows\system32\jscript.dll
	mshtmled	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 905.50 KB (927,232 bytes) 3/25/2005
	6:00 AM	Microsoft Corporation c:\windows\system32\mshtmled.dll
	vbscript	5.6.0.8827 646.50 KB (662,016 bytes) 3/25/2005 6:00 AM Microsoft Corporation c:\windows\system32\vbscript.dll
	msinfo	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 636.00 KB (651,264 bytes) 1/5/2006
	11:26 AM	Microsoft Corporation c:\windows\system32\msinfo

```

c:\windows\pchealth\helpctr\binaries\msinfo
.dll          1.39 MB (1,462,272
mfc42u       6.50.9146.0      bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\mfc42u.dll
comdlg32     6.00.3790.1830 (srv03_spl_rtm.050324-1447)
446.50 KB (457,216 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\comdlg32.dll
riched32     5.2.3790.1830 (srv03_spl_rtm.050324-1447)
7.00 KB (7,168 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\riched32.dll
riched20     5.31.23.1224 1.10 MB (1,157,120
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\riched20.dll
helpsvc      5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.52 MB (1,591,296 bytes) 1/5/2006
11:25 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\helpsv
c.exe

[Services]

Display Name      Name      State      Start Mode
Service Type      Path      Error Control
Start Name        Tag ID
Application Experience Lookup Service AeLookupSvc
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice      Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0
Windows Audio     AudioSrv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser   Browser Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

Indexing Service CiSvc Stopped Disabled
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.5
27\mscorsvw.exe Ignore LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_x64
clr_optimization_v2.0.50727_64
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\mscorsvw.exe Ignore LocalSystem 0
COM+ System Application COMSysApp Stopped
Manual Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DCOM Server Process Launcher DcomLaunch
Running Auto Share Process
c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0
Distributed File System Dfs Stopped
Manual Own Process
c:\windows\system32\dfssvc.exe
Normal LocalSystem 0
DHCP Client Dhcp Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
networkservice      Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmadmin Stopped Manual Share Process
c:\windows\system32\dmadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DNS Client DnsCache Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
networkservice      Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0

```

```

Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support helpsvc Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL HTTPFilter Stopped Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IAS Jet Database Access IASJet Stopped
Manual Share Process
c:\windows\syswow64\svchost.exe -k iasjet
Normal LocalSystem 0
IMAPI CD-Burning COM Service ImaPIService
Stopped Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process c:\windows\system32\ismserv.exe
Normal LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Workstation lanmanworkstation Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
License Logging LicenseService Stopped
Disabled Own Process
c:\windows\system32\lssrv.exe
Normal NT AUTHORITY\NetworkService 0
TCP/IP NetBIOS Helper LmHosts Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k
localservice      Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvrc
Stopped Disabled Own Process
c:\windows\system32\mnmsrvrc.exe
Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
Running Auto Own Process

```

```

c:\windows\system32\msdtc.exe Normal      NT
AUTHORITY\NetworkService   0
SQL Server FullText Search (MSSQLSERVER)
  msftesql Stopped  Manual  Own Process
    "c:\program files\microsoft sql
server\mssql.1\mssql\binn\msftesql.exe" -s:mssql.1
f:mssqlserver  Normal  LocalSystem   0

Windows Installer MSIInstaller Stopped  Manual
  Share Process
  c:\windows\system32\msiexec.exe /v
  Normal  LocalSystem   0
SQL Server (MSSQLSERVER) MSSQLSERVER
  Stopped  Manual  Own Process
    "c:\program files\microsoft sql
server\mssql.1\mssql\binn\sqlservr.exe" -smssqlserver
  Normal  LocalSystem   0
SQL Server Active Directory Helper
  MSSQLServerADHelper Stopped  Disabled  Own
Process "c:\program files\microsoft sql
server\90\shared\sqladhlpp0.exe"  Normal  NT
AUTHORITY\NetworkService   0
Network DDE NetDDE Stopped  Disabled
  Share Process
  c:\windows\system32\netdde.exe
  Normal  LocalSystem   0
Network DDE DSDM NetDDEdsm Stopped
  Disabled  Share Process
  c:\windows\system32\netdde.exe
  Normal  LocalSystem   0
Net Logon Netlogon Stopped  Manual  Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem   0
Network Connections Netman Running  Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0
Network Location Awareness (NLA) Nla
  Stopped  Disabled  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0
File Replication NTFRS Stopped  Manual  Own
Process c:\windows\system32\ntfrs.exe Ignore
  LocalSystem   0
NT LM Security Support Provider NtLmssp
  Stopped  Manual  Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem   0
Removable Storage NtmsSvc Stopped  Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0
Office Source Engine ose Stopped
  Manual  Own Process
  "c:\program
files (x86)\common files\microsoft shared\source
engine\ose.exe"  Normal  LocalSystem   0
Plug and Play PlugPlay Running  Auto
  Share Process
  c:\windows\system32\services.exe
  Normal  LocalSystem   0

```

```

IPSEC Services PolicyAgent Stopped
  Disabled  Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem   0
Protected Storage ProtectedStorage Running
  Auto  Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem   0
Remote Access Auto Connection Manager RasAuto
  Stopped  Manual  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0
Remote Access Connection Manager RasMan
  Stopped  Manual  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0
Remote Desktop Help Session Manager RDSessionMgr
  Stopped  Manual  Own Process
  c:\windows\system32\sessmgr.exe
  Normal  LocalSystem   0
Routing and Remote Access RemoteAccess
  Stopped  Disabled  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0
Remote Registry RemoteRegistry Stopped
  Disabled  Share Process
  c:\windows\system32\svchost.exe -k regsvc
  Normal  NT AUTHORITY\LocalService   0
Remote Procedure Call (RPC) Locator RpcLocator
  Stopped  Manual  Own Process
  c:\windows\system32\locator.exe
  Normal  NT AUTHORITY\NetworkService   0
Remote Procedure Call (RPC) RpcSs Running
  Auto  Share Process
  c:\windows\system32\svchost.exe -k rpcss
  Normal  NT AUTHORITY\NetworkService   0
Resultant Set of Policy Provider RSOPProv
  Stopped  Manual  Share Process
  c:\windows\system32\rspopprov.exe
  Normal  LocalSystem   0
Special Administration Console Helper sasrvr
  Stopped  Manual  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0
Security Accounts Manager SamSs Running
  Auto  Share Process
  c:\windows\system32\lsass.exe Normal
  LocalSystem   0
Smart Card SCardsrv Stopped  Manual
  Share Process
  c:\windows\system32\scardsrv.exe
  Ignore  NT AUTHORITY\LocalService   0
Task Scheduler Schedule Stopped  Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0

```

```

Secondary Logon seclogon Stopped  Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore  LocalSystem   0
System Event Notification SENS Running
  Auto  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0
Windows Firewall/Internet Connection Sharing (ICS)
  SharedAccess Stopped  Disabled
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal  LocalSystem   0
Shell Hardware Detection ShellHWDetection
  Running  Auto  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore  LocalSystem   0
Print Spooler Spooler Stopped  Disabled  Own
Process c:\windows\system32\spoolsv.exe
  Normal  LocalSystem   0
SQL Server Browser SQLBrowser Stopped
  Disabled  Own Process
  "c:\program
files (x86)\microsoft sql
server\90\shared\sqlbrowser.exe"  Normal
  LocalSystem   0
SQL Server Agent (MSSQLSERVER)
  SQLSERVERAGENT Stopped  Manual  Own
Process "c:\program files\microsoft sql
server\mssql.1\mssql\binn\sqlagent90.exe" -i
mssqlserver  Normal  LocalSystem   0
SQL Server VSS Writer SQLWriter Stopped
  Manual  Own Process
  "c:\program
files\microsoft sql server\90\shared\sqlwriter.exe"
  Normal  LocalSystem   0
Windows Image Acquisition (WIA) stisvc
  Stopped  Disabled  Share Process
  c:\windows\system32\svchost.exe -k imgsvc
  Normal  NT AUTHORITY\LocalService   0
Microsoft Software Shadow Copy Provider swprv
  Stopped  Manual  Own Process
  c:\windows\system32\svchost.exe -k swprv
  Normal  LocalSystem   0
HP ProLiant System Shutdown Service sysdown
  Running  Auto  Own Process
  c:\windows\system32\sysdown.exe
  Normal  LocalSystem   0
Performance Logs and Alerts SysmonLog Stopped
  Auto  Own Process
  c:\windows\system32\smlogsvc.exe
  Normal  NT Authority\NetworkService   0
Telephony Tapisrv Stopped  Manual  Share Process
  c:\windows\system32\svchost.exe -k tapisrv
  Normal  LocalSystem   0
Terminal Services TermService Running
  Manual  Share Process
  c:\windows\system32\svchost.exe -k termsvcs
  Normal  LocalSystem   0

```

```

Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0
Distributed Link Tracking Server TrkSrv
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Running Auto Own Process
c:\windows\system32\tsddis.exe
Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
Stopped Manual Own Process
c:\windows\system32\wdfmgr.exe
Normal NT AUTHORITY\LocalService 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal
LocalSystem 0
Virtual Disk Service vds Stopped
Manual Own Process
c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vspsc.exe Normal
LocalSystem 0
Windows Time W32Time Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Portable Media Serial Number Service WmdmPmSN
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Stopped Manual Share Process

```

```

c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped
Manual Own Process
c:\windows\system32\wbem\wmiapsrv.exe
Normal LocalSystem 0
Automatic Updates wuauserv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Wireless Configuration WZCSVc Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Provisioning Service xmlprov Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
[Program Groups]
Group Name Name User Name
Accessories Default User:Accessories
Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Startup Default User:Startup Default User
Accessories All Users:Accessories All
Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
AMD System Analysis Tools All Users:AMD System
Analysis Tools All Users
AMD System Analysis Tools\CpuSpy All Users
AMD System Analysis Tools\MultEvent All Users:AMD
System Analysis Tools\MultEvent All Users
HP System Tools All Users:HP System Tools All
Users
HP System Tools\HP Array Configuration Utility All
Users:HP System Tools\HP Array Configuration Utility
All Users
HP System Tools\HP Array Configuration Utility CLI
All Users:HP System Tools\HP Array Configuration Utility CLI All Users
HP System Tools\HP Array Diagnostic Utility All
Users:HP System Tools\HP Array Diagnostic Utility All
Users

```

```

Microsoft SQL Server 2005 All Users:Microsoft SQL
Server 2005 All Users
Microsoft SQL Server 2005\Analysis Services All
Users:Microsoft SQL Server 2005\Analysis Services All
Users
Microsoft SQL Server 2005\Configuration Tools All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Microsoft SQL Server 2005\Documentation and Tutorials
All Users:Microsoft SQL Server
2005\Documentation and Tutorials All Users
Microsoft SQL Server 2005\Documentation and
Tutorials\Tutorials All Users:Microsoft SQL Server
2005\Documentation and Tutorials\Tutorials All
Users
Microsoft SQL Server 2005\Performance Tools All
Users:Microsoft SQL Server 2005\Performance Tools All
Users
Microsoft Visual Studio 2005 All Users:Microsoft
Visual Studio 2005 All Users
Microsoft Visual Studio 2005\Visual Studio Tools All
Users:Microsoft Visual Studio 2005\Visual Studio
Tools All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM:Accessories\Accessibility NT
AUTHORITY\SYSTEM
Accessories\Entertainment NT
AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM
Accessories LONGSHOT\Administrator:Accessories
LONGSHOT\Administrator
Accessories\Accessibility LONGSHOT\Administrator:Accessories\Accessibil
ity LONGSHOT\Administrator
Accessories\Communications LONGSHOT\Administrator:Accessories\Communic
ations LONGSHOT\Administrator
Accessories\Entertainment LONGSHOT\Administrator:Accessories\Entertai
nment LONGSHOT\Administrator
Administrative Tools LONGSHOT\Administrator:Administrative Tools
LONGSHOT\Administrator
Iometer 2004.07.30 LONGSHOT\Administrator:Iometer
2004.07.30 LONGSHOT\Administrator
Startup LONGSHOT\Administrator:Startup
LONGSHOT\Administrator
[Startup Programs]
Program Command User Name Location

```

```

desktop desktop.ini          NT AUTHORITY\SYSTEM
desktop desktop.ini          LONGSHOT\Administrator
desktop desktop.ini          .DEFAULT Startup
desktop desktop.ini          All Users Common
Startup
CPQTEAM  cpqteam.exe        All Users
HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\Run

```

[OLE Registration]

```

Object Local Server
Sound (OLE2)    sndrec32.exe
Media Clip      mplay32.exe
Video Clip      mplay32.exe /avi
MIDI Sequence   mplay32.exe /mid
Sound Not Available
Media Clip Not Available
WordPad Document "%programfiles%\windows
nt\accessories\wordpad.exe"
Bitmap Image    mspaint.exe

```

[Windows Error Reporting]

Time	Type	Details
------	------	---------

[Internet Settings]

[Internet Explorer]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Version	6.0.3790.1830
Build	63790.1830
Application Path	C:\Program Files\Internet Explorer
Language	English (United States)
Active Printer	Not Available

Cipher Strength	128-bit
Content Advisor	Disabled
IEAK Install	No

[File Versions]

File	Version	Size	Date	Path
actxprxy.dll	6.0.3790.1830	221 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
advpack.dll	6.0.3790.1830	146 KB	3/25/2005 7:00:00 AM	

	C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx	6.0.3790.1830 147 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
browselc.dll	6.0.3790.1830 63 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
browseui.dll	6.0.3790.1830 1,564 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll	6.0.3790.1830 216 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll	5.82.3790.1830 935 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
dxtrans.dll	6.3.3790.1830 320 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll	6.3.3790.1830 549 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
iecont.dll	<File Missing> Not Available Not Available Not Available Not Available
iecontlc.dll	<File Missing> Not Available Not Available Not Available Not Available
iedkcs32.dll	16.0.3790.1830 417 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
ipeers.dll	6.0.3790.1830 361 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll	6.0.3790.1830 71 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
ieuinit.inf	Not Available 24 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Not Available
iexplore.exe	6.0.3790.1830 94 KB 3/25/2005 7:00:00 AM C:\Program Files\Internet Explorer Microsoft Corporation
imgutil.dll	6.0.3790.1830 61 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
inetcpl.cpl	6.0.3790.1830 428 KB 3/25/2005 7:00:00 AM

	C:\WINDOWS\system32 Microsoft Corporation
inetcplc.dll	6.0.3790.1830 110 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
inseng.dll	6.0.3790.1830 147 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
mlang.dll	6.0.3790.1830 686 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
msencode.dll	<File Missing> Not Available Not Available Not Available Not Available
mshta.exe	6.0.3790.1830 38 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll	6.0.3790.1830 5,790 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
mshtml.tlb	6.0.3790.1830 1,320 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
mshtmled.dll	6.0.3790.1830 906 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
mshtmler.dll	6.0.3790.1830 56 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
msident.dll	6.0.3790.1830 69 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
msidntld.dll	6.0.3790.1830 16 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
msieftp.dll	6.0.3790.1830 369 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
msrating.dll	6.0.3790.1830 240 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
mstime.dll	6.0.3790.1830 878 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation
occache.dll	6.0.3790.1830 126 KB 3/25/2005 7:00:00 AM C:\WINDOWS\system32 Microsoft Corporation

```

proctexe.ocx      <File Missing>      Not Available
                  Not Available      Not Available      Not Available
sendmail.dll       6.0.3790.1830        64 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation

shdoclc.dll        6.0.3790.1830        590 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation

shdocvw.dll        6.0.3790.1830        2,360 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation

shfolder.dll       6.0.3790.1830        34 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation

shlwapi.dll        6.0.3790.1830        607 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation

tdc.ocx            1.3.0.3130          91 KB     3/25/2005
                  7:00:00 AM
                  C:\WINDOWS\system32 Microsoft
Corporation

url.dll            6.0.3790.1830        40 KB     3/25/2005
                  7:00:00 AM
                  C:\WINDOWS\system32 Microsoft
Corporation

urllib.dll         6.0.3790.1830        1,049 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation

webcheck.dll       6.0.3790.1830        439 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation

wininet.dll        6.0.3790.1830        1,159 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]

Item      Value
Connection Preference    Never dial

LAN Settings

AutoConfigProxy      wininet.dll
AutoProxyDetectMode  Disabled
AutoConfigURL
Proxy      Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category
]
[Summary]

```

```

Item      Value
Page Refresh Type   Automatic
Temporary Internet Files Folder      C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space   Not Available
Available Disk Space  Not Available
Maximum Cache Size Not Available
Available Cache Size  Not Available

[List of Objects]

Program File      Status      CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category
]
[Summary]

Item      Value
Content Advisor    Disabled

[Personal Certificates]

Issued To Issued By Validity  Signature Algorithm
No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity  Signature Algorithm
No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone      Security Level
My Computer    Custom
Local intranet  Custom
Trusted sites  Custom
Internet      High
Restricted sites Custom

```

Server Bus Performance

Driver Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb
Class Name:      <NO CLASS>
Last Write Time: 9/19/2006 - 3:37 PM
Value 0
Name:           Type
Type:          REG_DWORD
Data:           0x1

Value 1
Name:           Start
Type:          REG_DWORD
Data:           0

Value 2
Name:           ErrorControl
Type:          REG_DWORD
Data:           0x1

Value 3
Name:           Tag
Type:          REG_DWORD
Data:           0x102

Value 4
Name:           ImagePath
Type:          REG_EXPAND_SZ
Data:           system32\DRIVERS\hpqcissb.sys

Value 5
Name:           DisplayName
Type:          REG_SZ
Data:           Smart Array Controllers Non-
Miniport Bus Driver

Value 6
Name:           Group
Type:          REG_SZ
Data:           port

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Parameters
Class Name:      <NO CLASS>
Last Write Time: 9/6/2006 - 9:49 AM
Value 0
Name:           CompletionMode
Type:          REG_DWORD
Data:           0x2

Value 1
Name:           CosTimerRate
Type:          REG_DWORD

```

```

Data: 0x2

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters\Controller0
Class Name: <NO CLASS>
Last Write Time: 7/12/2006 - 1:54 PM
Value 0
Name: CompletionMode
Type: REG_DWORD
Data: 0x1

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Security
Class Name: <NO CLASS>
Last Write Time: 1/5/2006 - 1:07 PM
Value 0
Name: Security
Type: REG_BINARY
Data:
00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 00 14
00 00 00 .....A.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0..... .
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 .....y.....
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....y...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00 ..... .
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 .....y.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 ..... .
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 ..... .
00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
00 14 00 ..... .
00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 ..... .
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 .....y.....
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.....
000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 ..... .

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Enum
Class Name: <NO CLASS>
Last Write Time: 9/19/2006 - 3:37 PM
Value 0
Name: 0
Type: REG_SZ
Data: Root\LEGACY_HPQCISSB\0000

```

```

Value 1
Name: Count
Type: REG_DWORD
Data: 0x1

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x1

```

```

Data: Smart Array Controllers Non-Miniport Disk Driver

```

```

Value 6
Name: Group
Type: REG_SZ
Data: Primary Disk

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd\Security
Class Name: <NO CLASS>
Last Write Time: 1/5/2006 - 2:28 PM
Value 0
Name: Security
Type: REG_BINARY
Data:

```

```

00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 00 14
00 00 00 .....A.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0..... .
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 .....y.....
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....y...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00 ..... .
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 .....y.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 ..... .
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 ..... .
00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
00 14 00 ..... .
00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 ..... .
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 .....y.....
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.....
000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 ..... .

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd\Enum
Class Name: <NO CLASS>
Last Write Time: 9/19/2006 - 3:37 PM
Value 0
Name: 0
Type: REG_SZ
Data: Root\LEGACY_HPQCISSD\0000

```

```

Value 1
Name: Count
Type: REG_DWORD
Data: 0x1

```

```

Value 1
Name: Start
Type: REG_DWORD
Data: 0x1

Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0

Value 3
Name: Tag
Type: REG_DWORD
Data: 0x102

Value 4
Name: ImagePath
Type: REG_EXPAND_SZ
Data: system32\DRIVERS\hpqcissd.sys

Value 5
Name: DisplayName
Type: REG_SZ

```

Value 2
 Name: NextInstance
 Type: REG_DWORD
 Data: 0x1

Server Network Driver Registry Parameters (NIC 1)

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
 \{4D36E97D-E325-11CE-BFC1-08002BE10318}\0233
 Class Name: <NO CLASS>
 Last Write Time: 7/31/2006 - 1:33 PM
 Value 0
 Name: create_pdo_flag
 Type: REG_SZ
 Data: 4
 Value 1
 Name: mtu
 Type: REG_SZ
 Data: 1500
 Value 2
 Name: req_medium
 Type: REG_SZ
 Data: 0
 Value 3
 Name: InfPath
 Type: REG_SZ
 Data: oem38.inf
 Value 4
 Name: InfSection
 Type: REG_SZ
 Data: NC37li_inst_amd64
 Value 5
 Name: ProviderName
 Type: REG_SZ
 Data: Hewlett-Packard Company
 Value 6
 Name: DriverDateData
 Type: REG_BINARY
 Data:
 00 40 39 1e 46 a5 c6 01 -
 .@9.FYE.

Value 7
 Name: DriverDate
 Type: REG_SZ
 Data: 7-12-2006
 Value 8
 Name: DriverVersion
 Type: REG_SZ
 Data: 2.8.15.0
 Value 9
 Name: MatchingDeviceId
 Type: REG_SZ
 Data:
 pci\ven_14e4&dev_164a&subsys_1709103c
 Value 10
 Name: DriverDesc
 Type: REG_SZ
 Data:
 HP NC37li Virtual Bus Device
 Value 11
 Name: target_ips
 Type: REG_SZ
 Data: 1500
 Value 12
 Name: optimize_ips
 Type: REG_SZ
 Data: 0

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
 \{4D36E97D-E325-11CE-BFC1-08002BE10318}\0233\ndi
 Class Name: <NO CLASS>
 Last Write Time: 7/12/2006 - 11:34 AM
 Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
 \{4D36E97D-E325-11CE-BFC1-
 08002BE10318}\0233\ndi\params
 Class Name: <NO CLASS>
 Last Write Time: 7/12/2006 - 11:34 AM

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
 \{4D36E97D-E325-11CE-BFC1-
 08002BE10318}\0233\ndi\params\mtu
 Class Name: <NO CLASS>
 Last Write Time: 7/12/2006 - 11:34 AM
 Value 0
 Name: paramdesc
 Type: REG_SZ
 Data: Maximum Transfer Unit
 Value 1
 Name: default
 Type: REG_SZ
 Data: 1500

Value 2
 Name: type
 Type: REG_SZ
 Data: dword

Value 3
 Name: min
 Type: REG_SZ
 Data: 1500

Value 4
 Name: max
 Type: REG_SZ
 Data: 9000

Value 5
 Name: step
 Type: REG_SZ
 Data: 500

Value 6
 Name: base
 Type: REG_SZ
 Data: 10

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
 \{4D36E97D-E325-11CE-BFC1-
 08002BE10318}\0233\ndi\params\req_medium
 Class Name: <NO CLASS>
 Last Write Time: 7/12/2006 - 11:34 AM
 Value 0
 Name: paramDesc
 Type: REG_SZ
 Data: Speed & Duplex

Value 1
 Name: default
 Type: REG_SZ
 Data: 0

Value 2
 Name: type
 Type: REG_SZ
 Data: enum

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
 \{4D36E97D-E325-11CE-BFC1-
 08002BE10318}\0233\ndi\params\req_medium\enum
 Class Name: <NO CLASS>
 Last Write Time: 7/12/2006 - 11:34 AM
 Value 0
 Name: 0
 Type: REG_SZ
 Data: Auto

Value 1

Name:	65794
Type:	REG_SZ
Data:	10 Mb Half
Value 2	
Name:	258
Type:	REG_SZ
Data:	10 Mb Full
Value 3	
Name:	66050
Type:	REG_SZ
Data:	100 Mb Half
Value 4	
Name:	514
Type:	REG_SZ
Data:	100 Mb Full

Server Network Driver Registry Parameters (NIC 2)

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0233
Class Name: <NO CLASS>
Last Write Time: 7/31/2006 - 1:33 PM
Value 0
Name: create_pdo_flag
Type: REG_SZ
Data: 4
Value 1
Name: mtu
Type: REG_SZ
Data: 1500
Value 2
Name: req_medium
Type: REG_SZ
Data: 0
Value 3
Name: InfPath
Type: REG_SZ
Data: oem38.inf
Value 4
Name: InfSection
Type: REG_SZ

Data:	NC37li_inst_amd64
Value 5	
Name:	ProviderName
Type:	REG_SZ
Data:	Hewlett-Packard Company
Value 6	
Name:	DriverDateData
Type:	REG_BINARY
Data:	00 40 39 1e 46 a5 c6 01 - .@9.FWE.
Value 7	
Name:	DriverDate
Type:	REG_SZ
Data:	7-12-2006
Value 8	
Name:	DriverVersion
Type:	REG_SZ
Data:	2.8.15.0
Value 9	
Name:	MatchingDeviceId
Type:	REG_SZ
Data:	pci\ven_14e4&dev_164a&subsys_1709103c
Value 10	
Name:	DriverDesc
Type:	REG_SZ
Data:	HP NC37li Virtual Bus Device
Value 11	
Name:	target_ips
Type:	REG_SZ
Data:	1500
Value 12	
Name:	optimize_ips
Type:	REG_SZ
Data:	0
Key Name:	
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class	
\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0233\ndi	
Class Name: <NO CLASS>	
Last Write Time: 7/12/2006 - 11:34 AM	
Key Name:	
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class	
\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0233\ndi\params	
Class Name: <NO CLASS>	
Last Write Time: 7/12/2006 - 11:34 AM	
Key Name:	
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class	
\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0233\ndi\req_medium	
Class Name: <NO CLASS>	
Last Write Time: 7/12/2006 - 11:34 AM	

\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0233\ndi\params\mtu	
Class Name: <NO CLASS>	
Last Write Time: 7/12/2006 - 11:34 AM	
Value 0	
Name:	paramdesc
Type:	REG_SZ
Data:	Maximum Transfer Unit
Value 1	
Name:	default
Type:	REG_SZ
Data:	1500
Value 2	
Name:	type
Type:	REG_SZ
Data:	dword
Value 3	
Name:	min
Type:	REG_SZ
Data:	1500
Value 4	
Name:	max
Type:	REG_SZ
Data:	9000
Value 5	
Name:	step
Type:	REG_SZ
Data:	500
Value 6	
Name:	base
Type:	REG_SZ
Data:	10
Key Name:	
HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class	
\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0233\ndi\params\req_medium	
Class Name: <NO CLASS>	
Last Write Time: 7/12/2006 - 11:34 AM	
Value 0	
Name:	paramDesc
Type:	REG_SZ
Data:	Speed & Duplex
Value 1	
Name:	default
Type:	REG_SZ
Data:	0
Value 2	
Name:	type
Type:	REG_SZ
Data:	enum

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Control\Class
 \{4D36E97D-E325-11CE-BFC1-
 08002BE10318\}0233\ndi\params\req_medium\enum
 Class Name: <NO CLASS>
 Last Write Time: 7/12/2006 - 11:34 AM
 Value 0
 Name: 0
 Type: REG_SZ
 Data: Auto
 Value 1
 Name: 65794
 Type: REG_SZ
 Data: 10 Mb Half
 Value 2
 Name: 258
 Type: REG_SZ
 Data: 10 Mb Full
 Value 3
 Name: 66050
 Type: REG_SZ
 Data: 100 Mb Half
 Value 4
 Name: 514
 Type: REG_SZ
 Data: 100 Mb Full

Web Client Hardware Configuration

System Information report written at: 09/18/06
 13:36:09
 System Name: CL55
 [System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003, Standard Edition
Version	5.2.3790 Service Pack 1 Build 3790
Other OS Description	Not Available
OS Manufacturer	Microsoft Corporation
System Name	CL55
System Manufacturer	HP
System Model	ProLiant DL360 G4
System Type	X86-based PC
Processor	x86 Family 15 Model 4 Stepping 1
	GenuineIntel ~3600 Mhz

Processor x86 Family 15 Model 4 Stepping 1
 GenuineIntel ~3600 Mhz
 BIOS Version/Date HP P52, 12/2/2004
 SMBIOS Version 2.3
 Windows Directory C:\WINDOWS
 System Directory C:\WINDOWS\system32
 Boot Device \Device\HarddiskVolume1
 Locale United States
 Hardware Abstraction Layer Version = "5.2.3790.1830 (srv03_spl_rtm.050324-1447)"
 User Name Not Available
 Time Zone Central Daylight Time
 Total Physical Memory 1,023.47 MB
 Available Physical Memory 805.97 MB
 Total Virtual Memory 2.42 GB
 Available Virtual Memory 2.30 GB
 Page File Space 1.50 GB
 Page File C:\pagefile.sys
 [Hardware Resources]
 [Conflicts/Sharing]
 Resource Device I/O Port 0x00000000-0x00000CF7 PCI bus
 I/O Port 0x00000000-0x00000CF7 Direct memory access controller
 IRQ 5 Base System Device
 IRQ 5 Base System Device
 I/O Port 0x000002F8-0x000002FF Motherboard resources
 I/O Port 0x000002F8-0x000002FF Communications Port (COM2)
 IRQ 16 Intel(R) E7525/E7520/E7320 PCI Express Root Port A0 - 3595
 IRQ 16 Intel(R) E7525/E7520 PCI Express Root Port B0 - 3597
 IRQ 16 Intel(R) E7520 PCI Express Root Port C0 - 3599
 IRQ 16 Standard Universal PCI to USB Host Controller
 Memory Address 0xA0000-0xBFFF PCI bus
 Memory Address 0xA0000-0xBFFF RAGE XL PCI Family (Microsoft Corporation)
 I/O Port 0x00004000-0x00004FFF Intel(R)
 6300ESB 64-bit PCI-X Bridge - 25AE
 I/O Port 0x00004000-0x00004FFF Smart Array 6i
 [DMA]
 Resource Device Status

Channel 7	Direct memory access controller	OK
Channel 2	Standard floppy disk controller	OK
[Forced Hardware]		
Device	PNP Device ID	
[I/O]		
Resource	Device	Status
0x00000000-0x00000CF7	PCI bus	OK
0x00000000-0x00000CF7	Direct memory access	
controller	OK	
0x0000D00-0x0000FFFF	PCI bus	OK
0x00004000-0x00004FFF	Intel(R) 6300ESB 64-bit	
PCI-X Bridge - 25AE	OK	
0x00004000-0x00004FFF	Smart Array 6i	OK
0x00002000-0x0000201F	Standard Universal PCI	
to USB Host Controller	OK	
0x00002020-0x0000203F	Standard Universal PCI	
to USB Host Controller	OK	
0x00003000-0x000030FF	RAGE XL PCI Family	
(Microsoft Corporation)	OK	
0x00003B0-0x00003BB	RAGE XL PCI Family	
(Microsoft Corporation)	OK	
0x00003C0-0x00003DF	RAGE XL PCI Family	
(Microsoft Corporation)	OK	
0x00001800-0x000018FF	Base System Device	OK
0x00003400-0x000034FF	Base System Device	OK
0x0000A79-0x0000A79	ISAPNP Read Data Port	
OK		
0x0000279-0x0000279	ISAPNP Read Data Port	
OK		
0x00000274-0x00000277	ISAPNP Read Data Port	
OK		
0x00000070-0x00000077	Motherboard resources	
OK		
0x00000408-0x0000040F	Motherboard resources	
OK		
0x000004D0-0x000004D1	Motherboard resources	
OK		
0x00000020-0x0000003F	Motherboard resources	
OK		
0x000000A0-0x000000BF	Motherboard resources	
OK		
0x00000090-0x0000009F	Motherboard resources	
OK		
0x00000050-0x00000053	Motherboard resources	
OK		
0x00000700-0x0000071F	Motherboard resources	
OK		
0x00000800-0x0000083F	Motherboard resources	
OK		
0x00000900-0x0000097F	Motherboard resources	
OK		

0x000000010-0x00000001F	Motherboard resources		IRQ 16 Standard Universal PCI to USB Host Controller OK	[Components]
OK			IRQ 24 Smart Array 6i OK	
0x00000C80-0x00000C83	Motherboard resources		IRQ 25 HP NC7782 Gigabit Server Adapter OK	
OK			IRQ 26 HP NC7782 Gigabit Server Adapter #2 OK	
0x00000CD4-0x00000CD7	Motherboard resources			[Multimedia]
OK				
0x00000F50-0x00000F58	Motherboard resources			
OK				
0x000002F8-0x000002FF	Motherboard resources		IRQ 19 Standard Universal PCI to USB Host Controller OK	
OK			IRQ 23 Standard Enhanced PCI to USB Host Controller OK	
0x000002F8-0x000002FF	Communications Port (COM2) OK		IRQ 5 Base System Device OK	
(COM2)			IRQ 5 Base System Device OK	
0x00000040-0x00000043	System timer OK		IRQ 0 System timer OK	
			IRQ 1 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK	
0x00000080-0x0000008F	Direct memory access controller OK		IRQ 12 PS/2 Compatible Mouse OK	
controller			IRQ 4 Communications Port (COM1) OK	
0x000000C0-0x000000DF	Direct memory access controller OK		IRQ 6 Standard floppy disk controller OK	
controller				
0x00000061-0x00000061	System speaker OK			
0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK	IRQ 14 Primary IDE Channel OK	
Microsoft Natural PS/2 Keyboard			IRQ 3 Communications Port (COM2) OK	
0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK		
Microsoft Natural PS/2 Keyboard				
0x0000002E-0x0000002F	Extended IO Bus OK			
0x0000004E-0x0000004F	Extended IO Bus	OK	Resource Device Status	
			0xA0000-0xBFFF PCI bus OK	
0x00000220-0x0000025F	Extended IO Bus	OK	0xA0000-0xBFFF RAGE XL PCI Family (Microsoft Corporation) OK	
			0x4000000-0xFEBFFFFFF PCI bus OK	
0x00000280-0x0000029F	Extended IO Bus	OK	0xFDP00000-0xFDFFFFFFF PCI-X Bridge - 25AE OK	
			0xFDP00000-0xFDF1FFFFFF Smart Array 6i OK	
0x000003F8-0x000003FF	Communications Port (COM1) OK		0xFDF80000-0xFDFBFFFFFF Smart Array 6i OK	
controller			0xFDF70000-0xFDF7FFFFFF HP NC7782 Gigabit Server Adapter OK	
0x000003F7-0x000003F7	Standard floppy disk controller OK		0xFDP60000-0xFDF6FFFFFF HP NC7782 Gigabit Server Adapter #2 OK	
controller			0xFBEEF0000-0xFBEBF000F Intel(R) 6300ESB Watchdog Timer - 25AB OK	
0x00000500-0x0000050F	Standard Dual Channel PCI IDE Controller OK		0xFBEEF0000-0xFBEE003FF Standard Enhanced PCI to USB Host Controller OK	
PCI IDE Controller			0xFC000000-0xFCFFFFFF RAGE XL PCI Family (Microsoft Corporation) OK	
0x000001F0-0x000001F7	Primary IDE Channel OK		0xFBFF0000-0xFBFF0FFF RAGE XL PCI Family (Microsoft Corporation) OK	
			0xFBFE0000-0xFBFE01FF Base System Device OK	
0x000003F6-0x000003F6	Primary IDE Channel OK		0xFBFD0000-0xFBFD07FF Base System Device OK	
			0xFBFC0000-0xFBFC1FFF Base System Device OK	
0x00000170-0x00000177	Secondary IDE Channel OK		0xFBFB0000-0xFBFB7FFFFFF Base System Device OK	
			0xE0000000-0xFFFFFFFF Motherboard resources OK	
0x00000376-0x00000376	Secondary IDE Channel OK		0xFEBFFC00-0xFEBFFFFFF Standard Dual Channel PCI IDE Controller OK	
[IRQs]				
Resource Device Status				
IRQ 9 Microsoft ACPI-Compliant System	OK			
IRQ 16 Intel(R) E7525/E7520/E7320 PCI Express Root Port A0 - 3595	OK			
IRQ 16 Intel(R) E7525/E7520 PCI Express Root Port B0 - 3597	OK			
IRQ 16 Intel(R) E7520 PCI Express Root Port C0 - 3599	OK			

3.02 84.00 KB (86,016 bytes)
3/25/2003 6:00 AM

[Video Codecs]

CODEC	Manufacturer	Description	Status	File	Version	Size	Creation Date
c:\windows\system32\tsbyuv.dll	Microsoft Corporation	OK	C:\WINDOWS\system32\TSBYUV.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	8.00 KB (8,192 bytes)	3/24/2003	
c:\windows\system32\msvidc32.dll	Microsoft Corporation	OK	C:\WINDOWS\system32\MSVIDC32.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	26.50 KB (27,136 bytes)	3/25/2003	
c:\windows\system32\msyuv.dll	Microsoft Corporation	OK	C:\WINDOWS\system32\MSYUV.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	16.50 KB (16,896 bytes)	3/24/2003 7:49 PM	
c:\windows\system32\msrle32.dll	Microsoft Corporation	OK	C:\WINDOWS\system32\MSRLE32.DLL	5.2.3790.0 (srv03_rtm.030324-2048)	10.50 KB (10,752 bytes)	3/25/2003	
c:\windows\system32\iyuv_32.dll	Microsoft Corporation	OK	C:\WINDOWS\system32\IYUV_32.DLL	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	46.50 KB (47,616 bytes)	12/7/2005	
c:\windows\system32\msh263.drv	Microsoft Corporation	OK	C:\WINDOWS\system32\MSH263.DRV	5.2.3790.1830	288.00 KB (294,912 bytes)	12/7/2005 1:25 PM	
c:\windows\system32\msh261.drv	Microsoft Corporation	OK	C:\WINDOWS\system32\MSH261.DRV	5.2.3790.1830	184.00 KB (188,416 bytes)	12/7/2005 1:25 PM	

[CD-ROM]

Item	Value
Drive D:	CD-ROM Drive
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	COMPAQ CRN-8245B
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0

PNP Device ID IDE\CDROMCOMPAQ_CRN-8245B 2.19 \5&180B77CF&0&0.0.0
Driver c:\windows\system32\drivers\cdrom.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 51.00 KB (52,224 bytes), 3/25/2003 6:00 AM)

[Sound Device]

Item	Value
------	-------

[Display]

Item	Value
Name	RAGE XL PCI Family (Microsoft Corporation)
PNP Device ID	PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_27\4&2183A681&0&18F0
Adapter Type	ATI RAGE XL PCI (B41), ATI Technologies Inc. compatible
Adapter Description	RAGE XL PCI Family (Microsoft Corporation)
Adapter RAM	8.00 MB (8,388,608 bytes)
Installed Drivers	ati2drad.dll
Driver Version	5.10.3663.6013
INF File	atiixpad.inf (ati2mpad section)
Color Planes	1
Color Table Entries	4294967296
Resolution	640 x 480 x 60 hertz
Bits/Pixel	32
Memory Address	0xfc000000-0xfcffff
I/O Port	0x00003000-0x000030ff
Memory Address	0xbfff0000-0xbfff0fff
I/O Port	0x000003b0-0x000003bb
I/O Port	0x000003c0-0x000003df
Memory Address	0xa0000-0xbfff
Driver	c:\windows\system32\drivers\ati2mpad.sys (5.10.3663.6013, 335.38 KB (343,424 bytes), 12/7/2005 4:18 AM)

[Infrared]

Item	Value
------	-------

[Input]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&1F443D2A&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1

Driver c:\windows\system32\drivers\i8042prt.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 54.50 KB (55,808 bytes), 3/25/2003 6:00 AM)

[Pointing Device]

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	2
Status	OK
PNP Device ID	ACPI\PNP0F13\4&1F443D2A&0
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
IRQ Channel	IRQ 12
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 54.50 KB (55,808 bytes), 3/25/2003 6:00 AM)

[Modem]

Item	Value
------	-------

[Network]

[Adapter]

Item	Value
Name	[00000001] RAS Async Adapter
Adapter Type	Not Available
Product Type	RAS Async Adapter
Installed Yes	
PNP Device ID	Not Available
Last Reset	9/18/2006 12:18 PM
Index	1
Service Name	AsyncMac
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000002] WAN Miniport (L2TP)
Adapter Type	Not Available
Product Type	WAN Miniport (L2TP)
Installed Yes	
PNP Device ID	ROOT\MS_L2TPMINIPORT\0000
Last Reset	9/18/2006 12:18 PM
Index	2
Service Name	Rasl2tp
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available

DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\rasl2tp.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 66.00 KB
 (67,584 bytes), 3/25/2003 6:00 AM)

Name [00000003] WAN Miniport (PPTP)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPTP)
 Installed Yes
 PNP Device ID ROOT\MS_PPTPMINIPORT\0000
 Last Reset 9/18/2006 12:18 PM
 Index 3
 Service Name PptpMiniport
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 50:50:54:50:30:30
 Driver c:\windows\system32\drivers\raspppt.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 61.00 KB
 (62,464 bytes), 3/25/2003 6:00 AM)

Name [00000004] WAN Miniport (PPPOE)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPPOE)
 Installed Yes
 PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
 Last Reset 9/18/2006 12:18 PM
 Index 4
 Service Name RasPppoe
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 33:50:6F:45:30:30
 Driver c:\windows\system32\drivers\raspppoe.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 40.00 KB
 (40,960 bytes), 3/25/2003 6:00 AM)

Name [00000005] Direct Parallel
 Adapter Type Not Available
 Product Type Direct Parallel
 Installed Yes
 PNP Device ID ROOT\MS_PTIMINIPORT\0000
 Last Reset 9/18/2006 12:18 PM
 Index 5
 Service Name Raspti
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available

MAC Address Not Available
 Driver c:\windows\system32\drivers\raspti.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 19.50 KB
 (19,968 bytes), 3/25/2003 6:00 AM)

Name [00000006] WAN Miniport (IP)
 Adapter Type Not Available
 Product Type WAN Miniport (IP)
 Installed Yes
 PNP Device ID ROOT\MS_NDISWANIP\0000
 Last Reset 9/18/2006 12:18 PM
 Index 6
 Service Name NdisWan
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\ndiswan.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 91.00 KB
 (93,184 bytes), 3/25/2003 6:00 AM)

Name [00000007] HP NC7782 Gigabit Server Adapter
 Adapter Type Ethernet 802.3
 Product Type HP NC7782 Gigabit Server Adapter
 Installed Yes
 PNP Device ID PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
 0\4&19638ECB&0&10E0
 Last Reset 9/18/2006 12:18 PM
 Index 7
 Service Name q57w2k
 IP Address 130.172.11.55
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:13:21:B1:EE:18
 Memory Address 0xFDF70000-0xFDF7FFFF
 IRQ Channel IRQ 25
 Driver c:\windows\system32\drivers\q57xp32.sys
 (8.48.0.0 built by: WinDDK, 139.38 KB (142,720 bytes), 12/7/2005 12:44 PM)

Name [00000008] HP NC7782 Gigabit Server Adapter
 Adapter Type Ethernet 802.3
 Product Type HP NC7782 Gigabit Server Adapter
 Installed Yes
 PNP Device ID PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
 0\4&19638ECB&0&11E0
 Last Reset 9/18/2006 12:18 PM

Index 8
 Service Name q57w2k
 IP Address 130.168.40.55
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:13:21:B1:EE:17
 Memory Address 0xFDF60000-0xFDF6FFFF
 IRQ Channel IRQ 26
 Driver c:\windows\system32\drivers\q57xp32.sys
 (8.48.0.0 built by: WinDDK, 139.38 KB (142,720 bytes), 12/7/2005 12:44 PM)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes
Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes

Maximum Message Size	63.93 KB (65,467 bytes)	Maximum Message Size	62.50 KB (64,000 bytes)	Guarantees Sequencing	Yes
Message Oriented	Yes	Message Oriented	Yes	Maximum Address Size	20 bytes
Minimum Address Size	16 bytes	Minimum Address Size	20 bytes	Maximum Message Size	62.50 KB (64,000 bytes)
Pseudo Stream Oriented	No	Pseudo Stream Oriented	No		
Supports Broadcasting	Yes	Supports Broadcasting	Yes	Message Oriented	Yes
Supports Connect Data	No	Supports Connect Data	No	Minimum Address Size	20 bytes
Supports Disconnect Data	No	Supports Disconnect Data	No	Pseudo Stream Oriented	No
Supports Encryption	Yes	Supports Encryption	No	Supports Broadcasting	No
Supports Expedited Data	No	Supports Expedited Data	No	Supports Connect Data	No
Supports Graceful Closing	No	Supports Graceful Closing	No	Supports Disconnect Data	No
Supports Guaranteed Bandwidth	No	Supports Guaranteed Bandwidth	No	Supports Encryption	No
Supports Multicasting	Yes	Supports Multicasting	No	Supports Expedited Data	No
Name	RSVP TCP Service Provider	Name	MSAFD NetBIOS	Supports Graceful Closing	No
Connectionless Service	No	(\Device\NetBT_Tcpip_{F82C0051-EEE6-4419-B00E-FBD3C9B049CB}) SEQPACKET 0	Connectionless Service	Supports Guaranteed Bandwidth	No
Guarantees Delivery	Yes	Guarantees Delivery	Yes	Supports Multicasting	No
Guarantees Sequencing	Yes	Guarantees Sequencing	Yes		
Maximum Address Size	16 bytes	Maximum Address Size	20 bytes	Name	MSAFD NetBIOS
Maximum Message Size	0 bytes	Maximum Message Size	62.50 KB (64,000 bytes)	(\Device\NetBT_Tcpip_{AF08E806-A2B0-4001-B24F-28D7AE290B39}) DATAGRAM 1	Connectionless Service
Message Oriented	No			Guarantees Delivery	Yes
Minimum Address Size	16 bytes			Guarantees Sequencing	No
Pseudo Stream Oriented	No			Maximum Address Size	20 bytes
Supports Broadcasting	No			Maximum Message Size	62.50 KB (64,000 bytes)
Supports Connect Data	No				
Supports Disconnect Data	No			Message Oriented	Yes
Supports Encryption	Yes			Minimum Address Size	20 bytes
Supports Expedited Data	Yes			Pseudo Stream Oriented	No
Supports Graceful Closing	Yes			Supports Broadcasting	Yes
Supports Guaranteed Bandwidth	No			Supports Connect Data	No
Supports Multicasting	No			Supports Disconnect Data	No
Name	MSAFD NetBIOS			Supports Encryption	No
(\Device\NetBT_Tcpip_{DC824356-0607-4BEB-A371-29F054512430}) SEQPACKET 3				Supports Expedited Data	No
Connectionless Service	No			Supports Graceful Closing	No
Guarantees Delivery	Yes			Supports Guaranteed Bandwidth	No
Guarantees Sequencing	Yes			Supports Multicasting	No
Maximum Address Size	20 bytes				
Maximum Message Size	62.50 KB (64,000 bytes)			Name	MSAFD NetBIOS
Message Oriented	Yes			(\Device\NetBT_Tcpip_{A1D88620-0D58-4732-8FAA-79AF6EC31BB9}) DATAGRAM 2	Connectionless Service
Minimum Address Size	20 bytes			Guarantees Delivery	No
Pseudo Stream Oriented	No			Guarantees Sequencing	Yes
Supports Broadcasting	No			Maximum Address Size	20 bytes
Supports Connect Data	No			Maximum Message Size	62.50 KB (64,000 bytes)
Supports Disconnect Data	No				
Supports Encryption	No			Message Oriented	Yes
Supports Expedited Data	No			Minimum Address Size	20 bytes
Supports Graceful Closing	No			Pseudo Stream Oriented	No
Supports Guaranteed Bandwidth	No			Supports Broadcasting	No
Supports Multicasting	No			Supports Connect Data	No
Name	MSAFD NetBIOS			Supports Disconnect Data	No
(\Device\NetBT_Tcpip_{DC824356-0607-4BEB-A371-29F054512430}) DATAGRAM 3				Supports Encryption	No
Connectionless Service	Yes			Supports Expedited Data	No
Guarantees Delivery	No			Supports Graceful Closing	No
Guarantees Sequencing	No			Supports Guaranteed Bandwidth	No
Maximum Address Size	20 bytes			Supports Multicasting	No
				Name	MSAFD NetBIOS
				(\Device\NetBT_Tcpip_{A1D88620-0D58-4732-8FAA-79AF6EC31BB9}) DATAGRAM 2	Connectionless Service
				Guarantees Delivery	No
				Guarantees Sequencing	Yes
				Maximum Address Size	20 bytes
				Maximum Message Size	62.50 KB (64,000 bytes)
				Message Oriented	Yes
				Minimum Address Size	20 bytes
				Pseudo Stream Oriented	No
				Supports Broadcasting	No
				Supports Connect Data	No
				Supports Disconnect Data	No
				Supports Encryption	No
				Supports Expedited Data	No
				Supports Graceful Closing	No
				Supports Guaranteed Bandwidth	No
				Supports Multicasting	No
				Name	MSAFD NetBIOS
				(\Device\NetBT_Tcpip_{A1D88620-0D58-4732-8FAA-79AF6EC31BB9}) DATAGRAM 2	Connectionless Service
				Guarantees Delivery	No
				Guarantees Sequencing	Yes
				Maximum Address Size	20 bytes
				Maximum Message Size	62.50 KB (64,000 bytes)

Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 20 bytes
Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes
Minimum Address Size 20 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting No

[WinSock]

Item	Value
File	c:\windows\system32\winsock.dll
Size	2.80 KB (2,864 bytes)
Version	3.10
File	c:\windows\system32\wsck32.dll
Size	22.00 KB (22,528 bytes)
Version	5.2.3790.0 (srv03_rtm.030324-2048)

[Ports]

[Serial]

Item	Value
Name	Communications Port (COM2)
Status	OK
PNP Device ID	ROOT*PNP0501\1_0_17_1_0_0
Maximum Input Buffer Size	0
Maximum Output Buffer Size	No
Settable Baud Rate	Yes
Settable Data Bits	Yes
Settable Flow Control	Yes
Settable Parity	Yes
Settable Parity Check	Yes
Settable Stop Bits	Yes
Settable RLSD	Yes
Supports RLSD	Yes
Supports 16 Bit Mode	No
Supports Special Characters	No
Baud Rate	9600
Bits/Byte	8
Stop Bits	1
Parity	None
Busy	No
Abort Read/Write on Error	No
Binary Mode Enabled	Yes
Continue Xmit on Xoff	No
CTS Outflow Control	No
Discard NULL Bytes	No
DSR Outflow Control	0
DSR Sensitivity	0
DTR Flow Control Type	Enable
EOF Character	0
Error Replace Character	0
Error Replacement Enabled	No
Event Character	0
RTS Flow Control Type	Enable
XOff Character	19
XOffXmit Threshold	512
XOn Character	17
XOnXmit Threshold	2048
XOnXoff InFlow Control	0
XOnXoff OutFlow Control	0

DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled No
Event Character 0
Parity Check Enabled No
RTS Flow Control Type Enable
XOff Character 19
XOffXmit Threshold 512
XOn Character 17
XOnXmit Threshold 2048
XOnXoff InFlow Control 0
XOnXoff OutFlow Control 0
I/O Port 0x000002F8-0x000002FF
IRQ Channel IRQ 3
Driver c:\windows\system32\drivers\serial.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 64.00 KB
(65,536 bytes), 3/25/2003 6:00 AM)

Name Communications Port (COM1)
Status OK
PNP Device ID ACPI\PNP0501\0
Maximum Input Buffer Size 0
Maximum Output Buffer Size No
Settable Baud Rate Yes
Settable Data Bits Yes
Settable Flow Control Yes
Settable Parity Yes
Settable Parity Check Yes
Settable Stop Bits Yes
Settable RLSD Yes
Supports RLSD Yes
Supports 16 Bit Mode No
Supports Special Characters No
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity None
Busy No
Abort Read/Write on Error No
Binary Mode Enabled Yes
Continue Xmit on Xoff No
CTS Outflow Control No
Discard NULL Bytes No
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled No
Event Character 0
Parity Check Enabled No
RTS Flow Control Type Enable
XOff Character 19
XOffXmit Threshold 512
XOn Character 17
XOnXmit Threshold 2048
XOnXoff InFlow Control 0
XOnXoff OutFlow Control 0

IRQ Channel IRQ 4
I/O Port 0x000003F8-0x000003FF
Driver c:\windows\system32\drivers\serial.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 64.00 KB
(65,536 bytes), 3/25/2003 6:00 AM)

[Parallel]

Item Value

[Storage]

[Drives]

Item	Value
Drive	A:
Description	3 1/2 Inch Floppy Drive

Drive	C:
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	33.91 GB (36,410,552,320 bytes)
Free Space	24.96 GB (26,797,477,888 bytes)

Volume Name	Volume Serial Number
	C8186725

Drive	D:
Description	CD-ROM Disc

[Disks]

Item	Value
Description	Disk drive
Manufacturer	(Standard disk drives)
Model	HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	0
SCSI Logical Unit	0
SCSI Port	2
SCSI Target ID	4
Sectors/Track	32
Size	33.91 GB (36,414,750,720 bytes)
Total Cylinders	8,716
Total Sectors	71,122,560
Total Tracks	2,222,580
Tracks/Cylinder	255
Partition Disk #0, Partition #0	
Partition Size	33.91 GB (36,410,556,416 bytes)
Partition Starting Offset	16,384 bytes

[SCSI]

Item Value

Name Smart Array 6i
 Manufacturer Hewlett-Packard Company
 Status OK
 PNP Device ID PCI\VEN_0E11&DEV_0046&SUBSYS_40910E11&REV_0
 1\4&19638ECB&0&08E0
 Memory Address 0xFDFF0000-0xFDFF1FFF
 I/O Port 0x00004000-0x00004FFF
 Memory Address 0xFDF80000-0xFDFBFFFF
 IRQ Channel IRQ 24
 Driver c:\windows\system32\drivers\cpqciism.sys
 (5.68.0.32 Build 1 (x86), 16.13 KB (16,512 bytes),
 5/20/2005 12:16 PM)

[IDE]

Item Value
 Name Standard Dual Channel PCI IDE Controller
 Manufacturer (Standard IDE ATA/ATAPI controllers)
 Status OK
 PNP Device ID PCI\VEN_8086&DEV_25A2&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&E8
 Standard Universal PCI to USB Host Controller
 PCI\VEN_8086&DEV_25AA&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&E9
 Standard Enhanced PCI to USB Host Controller
 PCI\VEN_8086&DEV_25AD&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&EF
 Memory Address 0xFEBFFC00-0xFEBFFFFF
 Driver c:\windows\system32\drivers\pcuide.sys
 (5.2.3790.0 (srv03_rtm.030324-2048), 5.50 KB (5,632 bytes), 3/25/2003 6:00 AM)

Name Primary IDE Channel
 Manufacturer (Standard IDE ATA/ATAPI controllers)
 Status OK
 PNP Device ID PCIIDE\IDECHANNEL\4&2BBEC4C6&0&0
 I/O Port 0x000001F0-0x000001F7
 I/O Port 0x000003F6-0x000003F6
 IRQ Channel IRQ 14
 Driver c:\windows\system32\drivers\atapi.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 93.50 KB (95,744 bytes), 3/25/2003 6:00 AM)

Name Secondary IDE Channel
 Manufacturer (Standard IDE ATA/ATAPI controllers)
 Status OK
 PNP Device ID PCIIDE\IDECHANNEL\4&2BBEC4C6&0&1
 I/O Port 0x00000170-0x00000177
 I/O Port 0x00000376-0x00000376
 Driver c:\windows\system32\drivers\atapi.sys
 (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 93.50 KB (95,744 bytes), 3/25/2003 6:00 AM)

[Printing]

Name Driver Port Name Server Name
 Labprinter on inforb (from DADAMS) in session 1 HP
 LaserJet 5Si/5Si MX PS TS003

[Problem Devices]

Device PNP Device ID	Error Code
Base System Device	
PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0	1\4&2183A681&0&20F0 The drivers for this device are not installed.
Base System Device	
PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0	1\4&2183A681&0&22F0 The drivers for this device are not installed.

[USB]

Device PNP Device ID	Error Code
Standard Universal PCI to USB Host Controller	
PCI\VEN_8086&DEV_25A9&SUBSYS_32010E11&REV_0	2\3&61AAA01&0&E8
Standard Universal PCI to USB Host Controller	
PCI\VEN_8086&DEV_25AA&SUBSYS_32010E11&REV_0	2\3&61AAA01&0&E9
Standard Enhanced PCI to USB Host Controller	
PCI\VEN_8086&DEV_25AD&SUBSYS_32010E11&REV_0	2\3&61AAA01&0&EF

[Software Environment]

[System Drivers]

Name	Description	File	Type
	Started	Start Mode	State
	Status	Error Control	Accept Pause
	Accept Stop		
abiosdsk	Abiosdsk	Not Available	Kernel Driver
	No	Disabled	Stopped
	Ignore	No	No
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	
	Kernel Driver	Yes	Boot
	Running	OK	Normal
		No	Yes
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	
	Kernel Driver	No	Disabled
	Stopped	OK	Normal
adpu160m	adpu160m	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	No
adpu320	adpu320	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	No
afcnt	afcnt	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	No
afd	AFD Networking Support Environment	c:\windows\system32\drivers\afd.sys	
	Kernel Driver	Yes	System

		Running	OK	Normal	No	Yes
ahal154x	Ahal154x	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
aic78u2	aic78u2	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
aic78xx	aic78xx	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
aliide	Aliide	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
asyncmac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asyncmac.sys				
	Kernel Driver	No	Manual			
	Stopped	OK	Normal	No	No	
atapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys				
	Kernel Driver	Yes	Boot			
	Running	OK	Normal	No	Yes	
atdisk	Atdisk	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Ignore	No	No			
ati2mpad	ati2mpad	c:\windows\system32\drivers\ati2mpad.sys				
	Kernel Driver	Yes	Manual			
	Running	OK	Ignore	No	Yes	
atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys				
	Kernel Driver	No	Manual			
	Stopped	OK	Normal	No	No	
audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys				
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
beep	Beep	c:\windows\system32\drivers\beep.sys				
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
cbidf2k	cbidf2k	c:\windows\system32\drivers\cbidf2k.sys				
	Kernel Driver	No	Disabled			
	Stopped	OK	Normal	No	No	
cd20xrnt	cd20xrnt	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Normal	No	No			
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys				
	File System Driver	Yes	Disabled			
	Running	OK	Normal	No	Yes	

cdrom	CD-ROM Driver c:\windows\system32\drivers\cdrom.sys Kernel Driver Yes System Running OK Normal No Yes	dmload	dmload c:\windows\system32\drivers\dmload.sys Kernel Driver Yes Boot Running OK Normal No Yes	i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver c:\windows\system32\drivers\i8042prt.sys Kernel Driver Yes System Running OK Normal No Yes
changer	Changer Not Available Kernel Driver No System Stopped OK Ignore No No	dpti2o	dpti2o Not Available Kernel Driver No Disabled Stopped OK Normal No No	iirsp	iirsp Not Available Kernel Driver No Disabled Stopped OK Normal No No
clusdisk	Cluster Disk Driver c:\windows\system32\drivers\clusdisk.sys Kernel Driver No Disabled Stopped OK Normal No No	fastfat	Fastfat c:\windows\system32\drivers\fastfat.sys File System Driver No Disabled Stopped OK Normal No No	imapi	CD-Burning Filter Driver c:\windows\system32\drivers\imapi.sys Kernel Driver No System Stopped OK Normal No No
cmdide	CmdIDE Not Available Kernel Driver No Disabled Stopped OK Normal No No	fdc	Floppy Disk Controller Driver c:\windows\system32\drivers\fdc.sys Kernel Driver Yes Manual Running OK Normal No Yes	intelide	IntelIDE Not Available Kernel Driver No Disabled Stopped OK Normal No No
cpqarray	Cpqarray Not Available Kernel Driver No Disabled Stopped OK Normal No No	fips	Fips c:\windows\system32\drivers\fips.sys Kernel Driver Yes System Running OK Normal No Yes	intelpmm	Intel Processor Driver c:\windows\system32\drivers\intelpmm.sys Kernel Driver Yes Manual Running OK Normal No Yes
cpqarry2	Cpqarry2 Not Available Kernel Driver No Disabled Stopped OK Normal No No	flpydisk	Floppy Disk Driver c:\windows\system32\drivers\flpydisk.sys Kernel Driver Yes Manual Running OK Normal No Yes	ip6fw	IPv6 Windows Firewall Driver c:\windows\system32\drivers\ip6fw.sys Kernel Driver No Manual Stopped OK Normal No No
cpqcissm	Cpqcissm c:\windows\system32\drivers\cpqcissm.sys Kernel Driver Yes Boot Running OK Normal No Yes	fltmgr	FltMgr c:\windows\system32\drivers\fltmgr.sys File System Driver Yes Boot Running OK Normal No Yes	ipfilterdriver	IP Traffic Filter Driver c:\windows\system32\drivers\ipfltdrv.sys Kernel Driver No Manual Stopped OK Normal No No
cpqfcalm	Cpqfcalm Not Available Kernel Driver No Disabled Stopped OK Normal No No	ftdisk	Volume Manager Driver c:\windows\system32\drivers\ftdisk.sys Kernel Driver Yes Boot Running OK Normal No Yes	ipinip	IP in IP Tunnel Driver c:\windows\system32\drivers\ipinip.sys Kernel Driver No Manual Stopped OK Normal No No
crcdisk	CRC Disk Filter Driver c:\windows\system32\drivers\crcdisk.sys Kernel Driver Yes Boot Running OK Normal No Yes	gpc	Generic Packet Classifier c:\windows\system32\drivers\msgpc.sys Kernel Driver Yes Manual Running OK Normal No Yes	ipnat	IP Network Address Translator c:\windows\system32\drivers\ipnat.sys Kernel Driver No Manual Stopped OK Normal No No
dac960nt	Dac960nt Not Available Kernel Driver No Disabled Stopped OK Normal No No	hpn	hpN Not Available Kernel Driver No Disabled Stopped OK Normal No No	ipsec	IPSEC driver c:\windows\system32\drivers\ipsec.sys Kernel Driver Yes System Running OK Normal No Yes
dellcerc	Dellcerc Not Available Kernel Driver No Disabled Stopped OK Normal No No	hpt3xx	HPT3XX Not Available Kernel Driver No Disabled Stopped OK Normal No No	ipsraiden	IPSAIDN Not Available Kernel Driver No Disabled Stopped OK Normal No No
dfsdriver	DfsDriver c:\windows\system32\drivers\dfs.sys File System Driver Yes Boot Running OK Normal No Yes	http	HTTP c:\windows\system32\drivers\http.sys Kernel Driver Yes Manual Running OK Normal No Yes	irenum	IR Enumerator Service c:\windows\system32\drivers\irenum.sys Kernel Driver No Manual Stopped OK Normal No No
disk	Disk Driver c:\windows\system32\drivers\disk.sys Kernel Driver Yes Boot Running OK Normal No Yes	i20mgmt	i20mgmt Not Available Kernel Driver No System Stopped OK Normal No No	isapnp	PnP ISA/EISA Bus Driver c:\windows\system32\drivers\isapnp.sys Kernel Driver Yes Boot Running OK Critical No Yes
dmboot	Dmboot c:\windows\system32\drivers\dmboot.sys Kernel Driver No Disabled Stopped OK Normal No No	i2omp	i2omp Not Available Kernel Driver No Disabled Stopped OK Normal No No	kbdclass	Keyboard Class Driver c:\windows\system32\drivers\kbdclass.sys
dmio	Logical Disk Manager Driver c:\windows\system32\drivers\dmio.sys Kernel Driver Yes Boot Running OK Normal No Yes				

	Kernel Driver Running OK	Yes Normal	System No	Yes		Kernel Driver Running OK	Yes Normal	Boot No	Yes		PCI Bus Driver c:\windows\system32\drivers\pci.sys
ksecdd	KSecDD c:\windows\system32\drivers\ksecdd.sys				ndistapi	Remote Access NDIS TAPI Driver c:\windows\system32\drivers\ndistapi.sys				Kernel Driver Running OK	Yes Critical
	Kernel Driver Running OK	Yes Normal	Boot No	Yes		Kernel Driver Running OK	Yes Normal	Manual No	Yes		Boot No
lp6nds35	lp6nds35 Not Available No Disabled Stopped Normal No No		Kernel Driver OK		ndisui0	NDIS Usermode I/O Protocol c:\windows\system32\drivers\ndisui0.sys				PCIide c:\windows\system32\drivers\pcide.sys	
mnmdd	c:\windows\system32\drivers\mnmd.sys					Kernel Driver Running OK	Yes Normal	Manual No	Yes	Kernel Driver Running OK	Yes Normal
	Kernel Driver Running OK	Yes Ignore	System No	Yes	ndiswan	Remote Access NDIS WAN Driver c:\windows\system32\drivers\ndiswan.sys				pcmcia c:\windows\system32\drivers\pcmcia.sys	
modem	Modem c:\windows\system32\drivers\modem.sys					Kernel Driver Running OK	Yes Normal	Manual No	Yes	Kernel Driver Stopped OK	Disabled Normal No
	Kernel Driver Stopped OK	No Ignore	Manual No	No	ndproxy	NDIS Proxy c:\windows\system32\drivers\ndproxy.sys				pdcomp PDCOMP	Not Available No
mouclass	Mouse Class Driver c:\windows\system32\drivers\mouclass.sys					Kernel Driver Running OK	Yes Normal	Manual No	Yes	Kernel Driver Ignore No	Manual No
	Kernel Driver Running OK	Yes Normal	System No	Yes	netbios	NetBIOS Interface c:\windows\system32\drivers\netbios.sys				pdframe PDFRAME	Not Available No
mountmgr	Mount Point Manager c:\windows\system32\drivers\mountmgr.sys					File System Driver Running OK	Yes Normal	System No	Yes	Kernel Driver Ignore No	Manual No
	Kernel Driver Running OK	Yes Normal	Boot No	Yes	netbt	NetBios over Tcpip c:\windows\system32\drivers\netbt.sys				pdreli PDRELI	Not Available No
mraid35x	mraid35x Not Available No Disabled Stopped Normal No No		Kernel Driver OK			Kernel Driver Running OK	Yes Normal	System No	Yes	Kernel Driver Ignore No	Manual No
					nfrd960	nfrd960 Not Available No Disabled Stopped Normal No No				pdrframe PDRFRAME	Not Available No
mrxdav	WebDav Client Redirector c:\windows\system32\drivers\mrxdav.sys					Kernel Driver Running OK	Yes Normal	System No	Yes	Kernel Driver perc2 Normal No	Disabled Normal No
	File System Driver Stopped OK	No Normal	Manual No	No	npfs	npfs c:\windows\system32\drivers\npfs.sys				Kernel Driver perc2hib Normal No	Not Available No
mrxsmb	MRXSMB c:\windows\system32\drivers\mrxsmb.sys					File System Driver Running OK	Yes Normal	System No	Yes	Kernel Driver perc2hib Normal No	Disabled Normal No
	File System Driver Running OK	Yes Normal	System No	Yes	ntfs	ntfs c:\windows\system32\drivers\ntfs.sys				Kernel Driver pptpminiport Normal No	WAN Miniport (PPTP) c:\windows\system32\drivers\raspppt.sys
msfs	Msfs c:\windows\system32\drivers\msfs.sys					File System Driver Running OK	Yes Normal	System No	Yes	Kernel Driver processor Running OK	Manual Normal No
	File System Driver Running OK	Yes Normal	System No	Yes	null	null c:\windows\system32\drivers\null.sys				Kernel Driver ptilink Running OK	Manual Normal No
mssmbios	Microsoft System Management BIOS Driver c:\windows\system32\drivers\mssmbios.sys					Kernel Driver Running OK	Yes Normal	System No	Yes	Kernel Driver q57w2k Running OK	Disabled Normal No
	Kernel Driver Running OK	Yes Normal	Manual No	Yes	parport	Parport c:\windows\system32\drivers\parport.sys				Kernel Driver ql1080 Running OK	Manual Normal No
mup	Mup c:\windows\system32\drivers\mup.sys					Kernel Driver Stopped OK	No Ignore	Manual No	No	Kernel Driver ql1080 Normal No	Disabled Normal No
	File System Driver Running OK	Yes Normal	Boot No	Yes	partmgr	Partition Manager c:\windows\system32\drivers\partmgr.sys				Kernel Driver ql10wnt Normal No	Not Available Disabled Stopped Normal No
ndis	NDIS System Driver c:\windows\system32\drivers\ndis.sys					Kernel Driver Running OK	Yes Normal	Boot No	Yes	Kernel Driver ql10wnt Normal No	Normal No

Available	Not Available	ROOT\LEGACY_DMBOOT\0000	floppy disk controllers)	fdc.inf	Not Available	RAGE XL PCI Family (Microsoft Corporation)	Yes
CRC Disk Filter Driver	Not Available	LEGACYDRIVER	ACPI\PNP0700\5&13608CEC&0	DISPLAY	5.10.2600.6014	8/8/2001	ATI Technologies Inc.
LEGACYDRIVER	Not Available	Not Available	Communications Port Yes	PORTS	5.2.3790.0	atiixpad.inf	Not Available
Available	Not Available	Not Available	10/1/2002 (Standard port types)			PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2	
Available	Not Available	Not Available	msports.inf	Not Available		7\4&2183A681&0&18F0	
Available	Not Available	Not Available	ACPI\PNP0501\0			Intel(R) 82801 PCI Bridge - 244E	Yes
Beep	Not Available	LEGACYDRIVER	Extended IO Bus Yes	SYSTEM	5.2.3790.0	SYSTEM	5.2.3790.1830
Available	Not Available	Not Available	10/1/2002 (Standard system devices)			Intel machine.inf	Not Available
Available	Not Available	ROOT\LEGACY_BEEP\0000	machine.inf	Not Available		PCI\VEN_8086&DEV_244E&SUBSYS_00000000&REV_0	
AFD Networking Support Environment	Not Available	ACPI\PNP01F13\4&1F443D2A&0	ACPI\PNP0A06\4&1F443D2A&0			A\3&61AAA01&0&F0	
LEGACYDRIVER	Not Available	PS/2 Compatible Mouse Yes	MOUSE			USB Root Hub Yes	USB 5.2.3790.0
Available	Not Available	Not Available	5.2.3790.0	10/1/2002 Microsoft		10/1/2002 (Standard USB Host Controller)	
Available	Not Available	Not Available	msmmouse.inf	Not Available		usbport.inf	Not Available
Available	Not Available	ROOT\LEGACY_AFD\0000	ACPI\PNP0F13\4&1F443D2A&0			USB\ROOT_HUB2\4&27805AAC&0	
Generic volume Yes	VOLUME	5.2.3790.0	Standard 101/102-Key or Microsoft Natural PS/2			Standard Enhanced PCI to USB Host Controller	Yes
10/1/2002 Microsoft	volume.inf	5.2.3790.0	Keyboard Yes	KEYBOARD	5.2.3790.0	USB 5.2.3790.0	10/1/2002
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE8B278B	5.2.3790.0	10/1/2002 (Standard keyboards)			(Standard USB Host Controller)	
27OFFSET4000LENGTH87A3D0000		5.2.3790.0	keyboard.inf	Not Available		usbport.inf	Not Available
Volume Manager Yes	SYSTEM	5.2.3790.0	ACPI\PNP0303\4&1F443D2A&0			PCI\VEN_8086&DEV_25AD&SUBSYS_32010E11&REV_0	
10/1/2002 (Standard system devices)		5.2.3790.0	System speaker Yes	SYSTEM	5.2.3790.0	2\3&61AAA01&0&EF	
machine.inf	Not Available	5.2.3790.0	10/1/2002 (Standard system devices)			Intel(R) 6300ESB I/O Advanced Programmable Interrupt	
ROOT\FTDISK\0000		5.2.3790.0	machine.inf	Not Available		Controller - 25AC Yes	SYSTEM 6.1.0.1008
Logical Disk Manager Yes	SYSTEM	5.2.3790.0	ACPI\PNP0800\4&1F443D2A&0			6/9/2004 Intel oem1.inf Not Available	
5.2.3790.0	10/1/2002 (Standard	5.2.3790.0	Direct memory access controller	Yes		PCI\VEN_8086&DEV_25AC&SUBSYS_32010E11&REV_0	
system devices)	system.inf	5.2.3790.0	SYSTEM 5.2.3790.0	10/1/2002		2\3&61AAA01&0&ED	
ACPI Fixed Feature Button Yes	SYSTEM	5.2.3790.0	(Standard system devices)	machine.inf		Intel(R) 6300ESB Watchdog Timer - 25AB Yes	
5.2.3790.0	10/1/2002 (Standard	5.2.3790.0	Not Available			SYSTEM 6.1.0.1008	6/9/2004
system devices)	machine.inf	5.2.3790.0	ACPI\PNP0200\4&1F443D2A&0			Intel oem1.inf Not Available	
ACPI\FIXEDBUTTON\2&DABA3FF&0		5.2.3790.0	System timer Yes	SYSTEM	5.2.3790.0	PCI\VEN_8086&DEV_25AB&SUBSYS_32010E11&REV_0	
ACPI Thermal Zone Yes	SYSTEM	5.2.3790.0	10/1/2002 (Standard system devices)			2\3&61AAA01&0&EC	
10/1/2002 (Standard system devices)		5.2.3790.0	machine.inf	Not Available		USB Root Hub Yes	USB 5.2.3790.0
machine.inf	Not Available	5.2.3790.0	ACPI\PNP0100\4&1F443D2A&0			10/1/2002 (Standard USB Host Controller)	
ACPI\THERMALZONE\THMO		5.2.3790.0	Motherboard resources Yes	SYSTEM		usbport.inf	Not Available
Secondary IDE Channel Yes	HDC	5.2.3790.0	5.2.3790.0	10/1/2002 (Standard		USB\ROOT_HUB\4&24B43ADC&0	
5.2.3790.0	10/1/2002 (Standard IDE	5.2.3790.0	system devices)	machine.inf		Standard Universal PCI to USB Host Controller	Yes
ATA/ATAPI controllers)		5.2.3790.0	ACPI\PNP0C02\0			USB 5.2.3790.0	10/1/2002
PCIIDE\IDECHANNEL\4&2BBEC4C6&0&1		5.2.3790.0	ISAPNP Read Data Port Yes	SYSTEM		(Standard USB Host Controller)	
CD-ROM Drive Yes	CDROM	5.2.3790.0	5.2.3790.0	10/1/2002 (Standard		usbport.inf	Not Available
10/1/2002 (Standard CD-ROM drives)		5.2.3790.0	system devices)	machine.inf		PCI\VEN_8086&DEV_25AA&SUBSYS_32010E11&REV_0	
cdrom.inf	Not Available	5.2.3790.0	ISAPNP\READADAPORT\0			2\3&61AAA01&0&B9	
IDE\CDROMCOMPAQ_CRN-		5.2.3790.0	Intel(R) 6300ESB LPC Interface Controller - 25A1 Yes			USB Root Hub Yes	USB 5.2.3790.0
8245B_____2.19_____5\180B77CF&0&0.		5.2.3790.0	SYSTEM 5.2.3790.1830	10/1/2002		10/1/2002 (Standard USB Host Controller)	
0.0		5.2.3790.0	Intel machine.inf	Not Available		usbport.inf	Not Available
Primary IDE Channel Yes	HDC	5.2.3790.0	PCI\VEN_8086&DEV_25A1&SUBSYS_00000000&REV_0			USB\ROOT_HUB\4&312B1C17&0	
10/1/2002 (Standard IDE ATA/ATAPI		5.2.3790.0	2\3&61AAA01&0&F8			Standard Universal PCI to USB Host Controller	Yes
controllers)		5.2.3790.0	Base System Device Not Available	UNKNOWN	Not Available	USB 5.2.3790.0	10/1/2002
mshdc.inf	Not Available	5.2.3790.0	Available Not Available	Not Available	Not Available	(Standard USB Host Controller)	
PCIIDE\IDECHANNEL\4&2BBEC4C6&0&0		5.2.3790.0	PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0			usbport.inf	Not Available
Standard Dual Channel PCI IDE Controller Yes	HDC	5.2.3790.0	1\4&2183A681&0&22F0			PCI\VEN_8086&DEV_25A9&SUBSYS_32010E11&REV_0	
5.2.3790.0	10/1/2002 (Standard	5.2.3790.0	Base System Device Not Available	UNKNOWN	Not Available	2\3&61AAA01&0&B8	
IDE ATA/ATAPI controllers)		5.2.3790.0	Available Not Available	Not Available	Not Available	HP NC7782 Gigabit Server Adapter	Yes NET
mshdc.inf	Not Available	5.2.3790.0	PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0			8.48.0.0 10/17/2005	Hewlett-
PCI\VEN_8086&DEV_25A2&SUBSYS_32010E11&REV_0		5.2.3790.0	1\4&2183A681&0&20F0			Packard Company oem2.inf Not Available	
2\3&61AAA01&0&F9		5.2.3790.0	Default Monitor Yes	MONITOR	5.1.2001.0	PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1	
Floppy disk drive Yes	FLOPPYDISK	5.2.3790.0	6/6/2001 (Standard monitor types)			0\4&19638ECB&0&11E0	
5.2.3790.0	10/1/2002 (Standard	5.2.3790.0	monitor.inf	Not Available		HP NC7782 Gigabit Server Adapter	Yes NET
floppy disk drives)	flpydisk.inf	5.2.3790.0	DISPLAY\DEFAULT_MONITOR\5\1CAD663B&0&800000			8.48.0.0 10/17/2005	Hewlett-
FDC\GENERIC_FLOPPY_DRIVE\6&27F7A21&0&0		5.2.3790.0	00&01&03			Packard Company oem2.inf Not Available	
Standard floppy disk controller Yes	FDC	5.2.3790.0				PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1	
5.2.3790.0	10/1/2002 (Standard	5.2.3790.0				0\4&19638ECB&0&10E0	

Disk drive Yes DISKDRIVE 5.2.3790.0
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_2.
 36\5&12B8725B&0&040
 Compaq Virtual LUN Yes SYSTEM 5.2.3790.0
 10/1/2002 Compaq scsidev.inf Not Available
 Available SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
 &REV_CISSL5&12B8725B&0&000
 Smart Array 61 Yes SCSIADAPTER
 5.6.0.32 5/20/2005 Hewlett-Packard Company
 oem0.inf Not Available
 PCI\VEN_0B11&DEV_0046&SUBSYS_40910E11&REV_0
 1\4&19638ECB&0&08E0
 Intel(R) 6300ESB 64-bit PCI-X Bridge - 25AE Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_25AE&SUBSYS_00000000&REV_0
 2\3&61AAA01&0&E0
 Intel(R) E7520 PCI Express Root Port C0 - 3599 Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_3599&SUBSYS_00000000&REV_0
 C\3&61AAA01&0&E30
 Intel(R) 6700PXH PCI Express-to-PCI Bridge B - 032A
 Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 Available PCI\VEN_8086&DEV_032A&SUBSYS_00000000&REV_0
 9\4&253DB27D0&0220
 Intel(R) 6700PXH PCI Express-to-PCI Bridge A - 0329
 Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 Available PCI\VEN_8086&DEV_0329&SUBSYS_00000000&REV_0
 9\4&253DB27D0&0020
 Intel(R) E7525/E7520 PCI Express Root Port B0 - 3597
 Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 Available PCI\VEN_8086&DEV_3597&SUBSYS_00000000&REV_0
 C\3&61AAA01&0&E20
 Intel(R) E7525/E7520/E7320 PCI Express Root Port A0 -
 3595 Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 Available PCI\VEN_8086&DEV_3595&SUBSYS_00000000&REV_0
 C\3&61AAA01&0&E10
 Intel(R) E7520 Memory Controller Hub - 3590 Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_3590&SUBSYS_00000000&REV_0
 C\3&61AAA01&0&00
 PCI bus Yes SYSTEM 5.2.3790.0
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0A03\2&DABA3FF&0
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available

ACPI\GENUINEINTEL -
 _X86_FAMILY_15_MODEL_4\1
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL -
 _X86_FAMILY_15_MODEL_4\0
 Microsoft ACPI-Compliant System Yes
 SYSTEM 5.2.3790.0 10/1/2002
 Microsoft acpi.inf Not Available
 ACPI_HAL\PNPOC08\0
 ACPI Multiprocessor PC Yes COMPUTER
 5.2.3790.0 10/1/2002 (Standard
 computers) hal.inf Not Available
 ROOT\ACPI_HAL\0000
 Not Available Not Available Not Available
 Not Available Not Available Not Available Not
 Available Not Available Not Available
 HTREE\ROOT\0
 Not Available Yes Not Available
 2:5.0:2:5.1:2:5.2 Not Available Not
 Available Not Available Not Available
 Labprinter on inforb (from DADAMS) in
 session 1
 [Environment Variables]
 Variable Value User Name
 ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
 Path %SystemRoot%\system32;%SystemRoot%&%SystemR
 oot%\System32\Wbem;c:\Program Files\Microsoft SQL
 Server\80\Tools\Binn\ <SYSTEM>
 windir %SystemRoot% <SYSTEM>
 OS Windows_NT <SYSTEM>
 PROCESSOR_ARCHITECTURE x86 <SYSTEM>
 PROCESSOR_LEVEL 15 <SYSTEM>
 PROCESSOR_IDENTIFIER x86 Family 15 Model 4
 Stepping 1, GenuineIntel <SYSTEM>
 PROCESSOR_REVISION 0401 <SYSTEM>
 NUMBER_OF_PROCESSORS 2 <SYSTEM>
 ClusterLog c:\WINDOWS\Cluster\cluster.log
 <SYSTEM>
 PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
 ;.WSH <SYSTEM>
 TEMP %SystemRoot%\TEMP <SYSTEM>
 TMP %SystemRoot%\TEMP <SYSTEM>
 FP_NO_HOST_CHECK NO <SYSTEM>
 TEMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\SYSTEM
 TMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\SYSTEM
 TEMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\LOCAL SERVICE
 TMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\LOCAL SERVICE
 TEMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\NETWORK SERVICE
 TMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\NETWORK SERVICE

TEMP %USERPROFILE%\Local Settings\Temp
 CL55\Administrator
 TMP %USERPROFILE%\Local Settings\Temp
 CL55\Administrator
 [Print Jobs]
 Document Size Owner Notify Status
 Time Submitted Start Time
 Until Time Elapsed Time
 Pages Printed Job ID Priority
 Parameters Driver Print
 Processor Host Print Queue Data Type Name
 [Network Connections]
 Local Name Remote Name Type
 Status User Name
 [Running Tasks]
 Name Path Process ID Priority Min
 Working Set Max Working Set Start Time
 Version Size File Date
 system idle process Not Available 0 0
 Not Available Not Available Not Available Not
 Available Not Available Not Available Not
 Available system Not Available 4 8 0
 1413120 Not Available Not Available
 Not Available Not Available
 smss.exe Not Available 352 11
 204800 1413120 9/18/2006 12:18 PM Not
 Available Not Available Not Available
 csrss.exe Not Available 472 13 Not
 Available Not Available 9/18/2006 12:18 PM Not
 Available Not Available Not Available
 winlogon.exe c:\windows\system32\winlogon.exe
 504 13 204800 1413120
 9/18/2006 12:18 PM 5.2.3790.1830
 (srv03_spl_rtm.050324-1447) 497.00 KB (508,928
 bytes) 12/7/2005 1:24 PM
 services.exe c:\windows\system32\services.exe
 548 9 204800 1413120
 9/18/2006 12:18 PM 5.2.3790.1830
 (srv03_spl_rtm.050324-1447) 107.50 KB (110,080
 bytes) 3/25/2003 6:00 AM
 lsass.exe c:\windows\system32\lsass.exe 560 9
 204800 1413120 9/18/2006 12:18 PM
 5.2.3790.0 (srv03_rtm.030324-2048)
 13.00 KB (13,312 bytes) 3/25/2003
 6:00 AM
 svchost.exe c:\windows\system32\svchost.exe
 752 8 204800 1413120
 9/18/2006 12:18 PM 5.2.3790.1830
 (srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
 12/7/2005 1:24 PM
 svchost.exe Not Available 820 8
 Not Available Not Available
 9/18/2006 12:18 PM Not Available Not
 Available Not Available

svchost.exe	Not Available	900	8		rdpclip.exe	c:\windows\system32\rdpclip.exe		1:25 PM	Microsoft Corporation	
	Not Available	Not Available				1472 8 204800 1413120			c:\windows\system32\msvcrt.dll	
	9/18/2006 12:18 PM	Not Available				9/18/2006 1:32 PM 5.2.3790.1830			5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
Available Not Available						(srv03_sp1_rtm.050324-1447) 68.00 KB (69,632 bytes)			574.50 KB (588,288 bytes)	12/7/2005
svchost.exe	Not Available	952	8			12/7/2005 1:25 PM			Microsoft Corporation	
	Not Available	Not Available				explorer.exe	c:\windows\explorer.exe		c:\windows\system32\user32.dll	
	9/18/2006 12:18 PM	Not Available				1532 8 204800 1413120			5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
Available Not Available						9/18/2006 1:32 PM 6.00.3790.1830			273.00 KB (279,552 bytes)	12/7/2005
svchost.exe	c:\windows\system32\svchost.exe					(srv03_sp1_rtm.050324-1447) 1.00 MB (1,050,624			Microsoft Corporation	
	968 8 204800 1413120					bytes)			c:\windows\system32\gdi32.dll	
	9/18/2006 12:18 PM	5.2.3790.1830				12/7/2005 1:25 PM			5.2.3790.0 (srv03_rtm.030324-2048)	
(srv03_sp1_rtm.050324-1447)	14.00 KB (14,336 bytes)								16.00 KB (16,384 bytes)	3/25/2003
spoolsv.exe	c:\windows\system32\spoolsv.exe								Microsoft Corporation	
	1560 8 204800 1413120								c:\windows\system32\nddeapi.dll	
	9/18/2006 12:18 PM	5.2.3790.1830				(srv03_sp1_rtm.050324-1447) 778.00 KB (796,672			5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
(srv03_sp1_rtm.050324-1447)	57.00 KB (58,368 bytes)					bytes)			22.50 KB (23,040 bytes)	12/7/2005
	12/7/2005 1:24 PM								Microsoft Corporation	
msdtc.exe	Not Available	1592	8						c:\windows\system32\profmap.dll	
Available Not Available		9/18/2006 12:18 PM	Not						5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
Available Not Available			Not Available						341.50 KB (349,696 bytes)	12/7/2005
svchost.exe	c:\windows\system32\svchost.exe								Microsoft Corporation	
	1780 8 204800 1413120								c:\windows\system32\netapi32.dll	
	9/18/2006 12:18 PM	5.2.3790.1830				(srv03_sp1_rtm.050324-1447) 745.00 KB (762,880			5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
(srv03_sp1_rtm.050324-1447)	14.00 KB (14,336 bytes)					bytes)			771.00 KB (789,504 bytes)	3/25/2003
	12/7/2005 1:24 PM								Microsoft Corporation	
inetinfo.exe	c:\windows\system32\inetsrv\inetinfo.exe								c:\windows\system32\userenv.dll	
	1856 8 204800 1413120								5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	9/18/2006 12:18 PM	6.0.3790.1830							20.00 KB (20,480 bytes)	12/7/2005
(srv03_sp1_rtm.050324-1447)	14.00 KB (14,336 bytes)								Microsoft Corporation	
	12/7/2005 1:27 PM								c:\windows\system32\psapi.dll	
svchost.exe	Not Available	1916	8						5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	Not Available	Not Available							55.00 KB (56,320 bytes)	12/7/2005
	9/18/2006 12:18 PM	Not Available							Microsoft Corporation	
Available Not Available									c:\windows\system32\regapi.dll	
svchost.exe	c:\windows\system32\svchost.exe								5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	940 8 204800 1413120								64.00 KB (65,536 bytes)	12/7/2005
	9/18/2006 12:19 PM	5.2.3790.1830							Microsoft Corporation	
(srv03_sp1_rtm.050324-1447)	14.00 KB (14,336 bytes)								c:\windows\system32\secur32.dll	
	12/7/2005 1:24 PM								5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
svchost.exe	c:\windows\system32\svchost.exe								1.03 MB (1,079,808 bytes)	3/25/2003
	1116 8 204800 1413120								Microsoft Corporation	
	9/18/2006 12:19 PM	5.2.3790.1830							c:\windows\system32\setupapi.dll	
(srv03_sp1_rtm.050324-1447)	14.00 KB (14,336 bytes)								5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	12/7/2005 1:24 PM								18.00 KB (18,432 bytes)	12/7/2005
wmiprvse.exe	Not Available	216	8						Microsoft Corporation	
	Not Available	Not Available							c:\windows\system32\version.dll	
	9/18/2006 12:20 PM	Not Available							5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
Available Not Available									54.50 KB (55,808 bytes)	12/7/2005
logon.scr	Not Available	1968	4						Microsoft Corporation	
Available Not Available		9/18/2006 12:28 PM	Not						c:\windows\system32\wininst.dll	
Available Not Available			Available						5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
csrss.exe	Not Available	1348	13						82.00 KB (83,968 bytes)	12/7/2005
Available Not Available		9/18/2006 1:32 PM	Not						Microsoft Corporation	
Available Not Available			Available						c:\windows\system32\ws2_32.dll	
winlogon.exe	c:\windows\system32\winlogon.exe								5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	1064 13 204800 1413120								19.50 KB (19,968 bytes)	12/7/2005
	9/18/2006 1:32 PM	5.2.3790.1830							Microsoft Corporation	
(srv03_sp1_rtm.050324-1447)	497.00 KB (508,928								c:\windows\system32\ws2help.dll	
bytes)	12/7/2005 1:24 PM								5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
									1.16 MB (1,211,904 bytes)	12/7/2005

1:25 PM	Microsoft Corporation	
	c:\windows\system32\msgina.dll	
shsvcs	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	131.50 KB (134,656 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\shsvcs.dll	
shlwapi	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	313.50 KB (321,024 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\shlwapi.dll	
sfc	5.2.3790.0 (srv03_rtm.030324-2048)	
	4.50 KB (4,608 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\sfc.dll	
sfc_os	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	138.00 KB (141,312 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\sfc_os.dll	
wintrust	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	
	162.00 KB (165,888 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wintrust.dll	
imagehlp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	145.50 KB (148,992 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\imagehlp.dll	
ole32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	1.19 MB (1,245,184 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ole32.dll	
comctl32	6.0 (srv03_sp1_rtm.050324-1447)	
	1.00 MB (1,051,136 bytes)	3/24/2005
9:41 PM	Microsoft Corporation	
	c:\windows\winsxs\x86_microsoft.windows.com	
mon-controls_6595b64144ccf1df_6.0_3790.1830_x-		
ww_7ae38ccf\comctl32.dll		
winscard	5.2.3790.0 (srv03_rtm.030324-2048)	
	98.50 KB (100,864 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\winscard.dll	
wtsapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	19.00 KB (19,456 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wtsapi32.dll	
sxs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	743.50 KB (761,344 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\sxss.dll	
winmm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	172.50 KB (176,640 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\winmm.dll	
shell32	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	7.99 MB (8,379,392 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\shell32.dll	
rsaenh	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	183.98 KB (188,392 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\rsaenh.dll	

wldap32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	174.50 KB (178,688 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wldap32.dll	
cscdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	100.00 KB (102,400 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\cscdll.dll	
dimsntfy	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	19.00 KB (19,456 bytes)	12/7/2005
1:28 PM	Microsoft Corporation	
	c:\windows\system32\dimsntrfy.dll	
wlnotify	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	94.50 KB (96,768 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wlnotify.dll	
mpn	5.2.3790.0 (srv03_rtm.030324-2048)	
	56.00 KB (57,344 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\mpn.dll	
oleaut32	5.2.3790.1830 (543.00 KB (556,032 bytes))	3/25/2003
bytes)	6:00 AM Microsoft Corporation	
	c:\windows\system32\oleaut32.dll	
winspool	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	147.00 KB (150,528 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\winspool.drv	
comctl32	5.82 (srv03_sp1_rtm.050324-1447)	
	585.00 KB (599,040 bytes)	3/24/2005
9:41 PM	Microsoft Corporation	
	c:\windows\system32\comctl32.dll	
mon-controls_6595b64144ccf1df_5.82_3790.1830_x-		
ww_1b6f474a\comctl32.dll		
uxtheme	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	202.00 KB (206,848 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\uxtheme.dll	
services	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	107.50 KB (110,080 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\services.exe	
ncobjapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	36.00 KB (36,864 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ncobjapi.dll	
msvcpc60	6.05.2144.0 (388.00 KB (397,312 bytes))	3/25/2003
bytes)	6:00 AM Microsoft Corporation	
	c:\windows\system32\msvcpc60.dll	
scesrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	327.00 KB (334,848 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\scesrv.dll	
authz	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	66.50 KB (68,096 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\authz.dll	
umpnpmgr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	126.50 KB (129,536 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\umpnpmgr.dll	

eventlog	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	67.50 KB (69,120 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\eventlog.dll	
lsass	5.2.3790.0 (srv03_rtm.030324-2048)	
	13.00 KB (13,312 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\lsass.exe	
lsasrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	803.00 KB (822,272 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\lsasrv.dll	
ntdsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	71.00 KB (72,704 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ntdsapi.dll	
dnsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	153.50 KB (157,184 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\dnsapi.dll	
samlib	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	46.50 KB (47,616 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\samlib.dll	
samsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	450.50 KB (461,312 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\samsrv.dll	
cryptdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	32.00 KB (32,768 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\cryptdll.dll	
msprivs	5.2.3790.0 (srv03_rtm.030324-2048)	
	46.50 KB (47,616 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\msprivs.dll	
kerberos	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	340.50 KB (348,672 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\kerberos.dll	
msv1_0	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	141.00 KB (144,384 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\msv1_0.dll	
iphlpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	92.50 KB (94,720 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\iphlpapi.dll	
netlogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	409.50 KB (419,328 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\netlogon.dll	
w32time	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	222.00 KB (227,328 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\w32time.dll	
schannel	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	141.00 KB (144,384 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\schannel.dll	

wdigest	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 74.00 KB (75,776 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\wdigest.dll	
rassfm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 23.00 KB (23,552 bytes)	12/7/2005
1:26 PM	Microsoft Corporation c:\windows\system32\rassfm.dll	
kdcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 213.50 KB (218,624 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\kdcsvc.dll	
ntdsa	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.45 MB (1,516,032 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\ntdsa.dll	
esent	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1,022.50 KB (1,047,040 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\esent.dll	
ntdsatq	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 29.50 KB (30,208 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\ntdsatq.dll	
mswsock	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 250.50 KB (256,512 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\mswsock.dll	
scecli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 186.50 KB (190,976 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\scecli.dll	
ws03res	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 793.50 KB (812,544 bytes)	12/7/2005
1:28 PM	Microsoft Corporation c:\windows\system32\ws03res.dll	
hnetcfg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 343.50 KB (351,744 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\hnetcfg.dll	
wshtcpip	5.2.3790.0 (srv03_rtm.030324-2048) 18.00 KB (18,432 bytes)	3/25/2003
6:00 AM	Microsoft Corporation c:\windows\system32\wshtcpip.dll	
ipsecsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 180.50 KB (184,832 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\ipsecsvc.dll	
oakley	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 264.00 KB (270,336 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\oakley.dll	
winipsec	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 35.50 KB (36,352 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\winipsec.dll	
pstorsvc	5.2.3790.0 (srv03_rtm.030324-2048) 24.00 KB (24,576 bytes)	3/25/2003
6:00 AM	Microsoft Corporation c:\windows\system32\pstorsvc.dll	

psbase	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 84.00 KB (86,016 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\psbase.dll	
dssenh	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 139.98 KB (143,336 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\dssenh.dll	
wlbsctrl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 82.00 KB (83,968 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\wlbsctrl.dll	
w3ssl	6.0.3790.0 (srv03_rtm.030324-2048) 15.00 KB (15,360 bytes)	3/25/2003
6:00 AM	Microsoft Corporation c:\windows\system32\w3ssl.dll	
strmfilt	6.0.3790.1830 (srv03_sp1_rtm.050324-1447) 84.00 KB (86,016 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\strmfilt.dll	
httpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 24.00 KB (24,576 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\httpapi.dll	
svchost	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 14.00 KB (14,336 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\svchost.exe	
rpcss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 406.00 KB (415,744 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\rpcss.dll	
xpssp2res	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.76 MB (2,897,920 bytes)	12/7/2005
1:28 PM	Microsoft Corporation c:\windows\system32\xpssp2res.dll	
clbcatq	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447) 502.50 KB (514,560 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\clbcatq.dll	
comres	2001.12.4720.0 (srv03_rtm.030324-2048) 778.00 KB (796,672 bytes)	3/25/2003
6:00 AM	Microsoft Corporation c:\windows\system32\comres.dll	
ntmarta	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 120.50 KB (123,392 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\ntmarta.dll	
wzcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 364.50 KB (373,248 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\wzcsvc.dll	
rtutil	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 34.50 KB (35,328 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\rtutil.dll	
wmi	5.2.3790.0 (srv03_rtm.030324-2048) 6.50 KB (6,656 bytes)	3/25/2003
6:00 AM	Microsoft Corporation c:\windows\system32\wmi.dll	

dhpcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 113.50 KB (116,224 bytes)	3/25/2003
6:00 AM	Microsoft Corporation c:\windows\system32\dhpcsvc.dll	
atl	3.05.2283 83.00 KB (84,992 bytes)	3/25/2003 6:00 AM
rastls	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 180.00 KB (184,320 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\rastls.dll	
cryptui	5.131.3790.1830 (srv03_sp1_rtm.050324-1447) 496.50 KB (508,416 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\cryptui.dll	
mprapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 89.00 KB (91,136 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\mprapi.dll	
activeds	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 194.00 KB (198,656 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\activeds.dll	
adsldpc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 146.00 KB (149,504 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\adsldpc.dll	
credui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 162.00 KB (165,888 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\credui.dll	
rasapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 239.50 KB (245,248 bytes)	3/25/2003
6:00 AM	Microsoft Corporation c:\windows\system32\rasapi32.dll	
rasman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 61.50 KB (62,976 bytes)	3/25/2003
6:00 AM	Microsoft Corporation c:\windows\system32\rasman.dll	
tapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 179.50 KB (183,808 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\tapi32.dll	
raschap	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 119.50 KB (122,368 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\raschap.dll	
schedsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 197.50 KB (202,240 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\schedsvc.dll	
wiarp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 32.50 KB (33,280 bytes)	12/7/2005
1:24 PM	Microsoft Corporation c:\windows\system32\wiarp.dll	
msidle	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 6.50 KB (6,656 bytes)	12/7/2005
1:25 PM	Microsoft Corporation c:\windows\system32\msidle.dll	
audiosrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 40.50 KB (41,472 bytes)	12/7/2005

1:25 PM	Microsoft Corporation	c:\windows\system32\audiosrv.dll
wkssvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	130.00 KB (133,120 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\wkssvc.dll
aelupsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	26.00 KB (26,624 bytes) 12/7/2005
1:28 PM	Microsoft Corporation	c:\windows\system32\aelupsvc.dll
apphelp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	146.50 KB (150,016 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\apphelp.dll
cryptsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	55.50 KB (56,832 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\cryptsvc.dll
certcli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	227.00 KB (232,448 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\certcli.dll
vssapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	548.00 KB (561,152 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\vssapi.dll
es	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	233.00 KB (238,592 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\es.dll
pchsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	39.00 KB (39,936 bytes) 12/7/2005
1:26 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\pchsvc.dll
srvsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	93.50 KB (95,744 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\srvsvc.dll
sens	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	36.50 KB (37,376 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\sens.dll
seclogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	18.50 KB (18,944 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\seclogon.dll
trkwks	5.2.3790.0 (srv03_rtm.030324-2048)	85.00 KB (87,040 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\trkwks.dll
wmisvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	140.00 KB (143,360 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\wmisvc.dll
comsvcs	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	1.19 MB (1,248,256 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\comsvcs.dll
browser	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	76.50 KB (78,336 bytes) 12/7/2005

1:25 PM	Microsoft Corporation	c:\windows\system32\browsers.dll
netrap	5.2.3790.0 (srv03_rtm.030324-2048)	11.50 KB (11,776 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\netrap.dll
wbemcore	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	497.50 KB (509,440 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemcore.dll
esscli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	250.00 KB (256,000 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\esscli.dll
wbemcomm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	221.00 KB (226,304 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemcomm.dll
fastprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	471.00 KB (482,304 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\fastprox.dll
wmiutils	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	93.50 KB (95,744 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\wmiutils.dll
repdrvfs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	172.50 KB (176,640 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\repdrvfs.dll
wmiprvsd	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	404.00 KB (413,696 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\wmiprvsd.dll
wbemess	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	271.50 KB (278,016 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemess.dll
ncprov	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	46.50 KB (47,616 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbem\ncprov.dll
wbemsvc	5.2.3790.0 (srv03_rtm.030324-2048)	42.50 KB (43,520 bytes) 12/7/2005
12:22 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemsvc.dll
xactsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	90.00 KB (92,160 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\xactsrv.dll
ntlsapi	5.2.3790.0 (srv03_rtm.030324-2048)	8.00 KB (8,192 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\ntlsapi.dll
actxprxy	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	96.50 KB (98,816 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\actxprxy.dll
netman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	258.50 KB (264,704 bytes) 12/7/2005

1:25 PM	Microsoft Corporation	c:\windows\system32\netman.dll
netshell	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.73 MB (1,812,992 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\netshell.dll
clusapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	60.00 KB (61,440 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\clusapi.dll
wininet	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	646.00 KB (661,504 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\wininet.dll
wzcsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	41.00 KB (41,984 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\wzcsapi.dll
wbemcons	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	45.50 KB (46,592 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbemcons.dll
netcfgx	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	763.00 KB (781,312 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\netcfgx.dll
wbemprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	20.50 KB (20,992 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\wbemprox.dll
rasdlg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	663.00 KB (678,912 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\rasdlg.dll
rasadhlpl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	7.50 KB (7,680 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\rasadhlpl.dll
spoolsv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	57.00 KB (58,368 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\spoolsv.exe
spoolss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	85.00 KB (87,040 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\spoolss.dll
localspl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	339.00 KB (347,136 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\localspl.dll
cnbjmon	5.2.3790.1224 (dnsrv(skatari).040514-1058)	46.50 KB (47,616 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\cnbjmon.dll
pjlmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	15.00 KB (15,360 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\pjlmmon.dll
tcpmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	47.00 KB (48,128 bytes) 12/7/2005

1:24 PM	Microsoft Corporation	c:\windows\system32\tcpmon.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		43.00 KB (44,032 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\wsnmp32.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		17.50 KB (17,920 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\tcpmib.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		22.00 KB (22,528 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\wsock32.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		15.50 KB (15,872 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\mgmtapi.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		19.50 KB (19,968 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\snmpapi.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		17.00 KB (17,408 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\usbmon.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		17.00 KB (17,408 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\wshgoss.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		24.00 KB (24,576 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\win32spl.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		100.50 KB (102,912 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\win32spl.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		75.00 KB (76,800 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\inetp.dll
		5.2.3790.0 (srv03_rtm.030324-2048)
		4.50 KB (4,608 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\icmp.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		135.00 KB (138,240 bytes) 2/1/2006 3:17
PM	Microsoft Corporation	c:\windows\system32\spool\drivers\w32x86\3\ps5ui.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		24.00 KB (24,576 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\ersvc.dll
		6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		14.00 KB (14,336 bytes) 12/7/2005
1:27 PM	Microsoft Corporation	c:\windows\system32\inetsrv\inetinfo.exe

iisutil	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	164.00 KB (167,936 bytes) 12/7/2005
		Microsoft Corporation
1:28 PM	c:\windows\system32\inetsrv\iisutil.dll	
rpcpref	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	4.00 KB (4,096 bytes) 12/7/2005
		Microsoft Corporation
1:26 PM	c:\windows\system32\inetsrv\rpcpref.dll	
iisrtl	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	138.50 KB (141,824 bytes) 12/7/2005
		Microsoft Corporation
1:27 PM	c:\windows\system32\iisrtl.dll	
iisadmin	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	21.00 KB (21,504 bytes) 12/7/2005
		Microsoft Corporation
1:26 PM	c:\windows\system32\inetsrv\iisadmin.dll	
coadmin	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	62.50 KB (64,000 bytes) 12/7/2005
		Microsoft Corporation
1:26 PM	c:\windows\system32\inetsrv\coadmin.dll	
admwprom	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	47.00 KB (48,128 bytes) 12/7/2005
		Microsoft Corporation
1:28 PM	c:\windows\system32\admwprom.dll	
iiscfg	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	1.08 MB (1,133,056 bytes) 12/7/2005
		Microsoft Corporation
1:27 PM	c:\windows\system32\inetsrv\iiscfg.dll	
metadata	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	229.00 KB (234,496 bytes) 12/7/2005
		Microsoft Corporation
1:27 PM	c:\windows\system32\inetsrv\metadata.dll	
msxml3	8.70.1104.0 1.06 MB (1,107,456 bytes) 12/7/2005 1:25 PM	Microsoft Corporation
		c:\windows\system32\msxml3.dll
svcext	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	43.50 KB (44,544 bytes) 12/7/2005
		Microsoft Corporation
1:27 PM	c:\windows\system32\inetsrv\svcext.dll	
security	5.2.3790.0 (srv03_rtm.030324-2048)	5.50 KB (5,632 bytes) 3/25/2003
		Microsoft Corporation
6:00 AM	c:\windows\system32\security.dll	
iismap	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	58.50 KB (59,904 bytes) 12/7/2005
		Microsoft Corporation
1:28 PM	c:\windows\system32\iismap.dll	
wamreg	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	54.50 KB (55,808 bytes) 12/7/2005
		Microsoft Corporation
1:27 PM	c:\windows\system32\inetsrv\wamreg.dll	
iisw3adm	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	211.00 KB (216,064 bytes) 12/7/2005
		Microsoft Corporation
1:28 PM	c:\windows\system32\inetsrv\iisw3adm.dll	
w3cache	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	19.00 KB (19,456 bytes) 12/7/2005

1:26 PM	Microsoft Corporation	c:\windows\system32\inetsrv\w3cache.dll
		6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		13.00 KB (13,312 bytes) 12/7/2005
1:28 PM	Microsoft Corporation	c:\windows\system32\inetsrv\w3tp.dll
		6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		13.00 KB (13,312 bytes) 12/7/2005
1:27 PM	Microsoft Corporation	c:\windows\system32\inetsrv\lonsint.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		239.00 KB (244,736 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\termsrv.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		12.50 KB (12,800 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\icaapi.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		116.00 KB (118,784 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\mstlsapi.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		101.63 KB (104,072 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\rdpwsx.dll
		5.2.3790.0 (srv03_rtm.030324-2048)
		18.00 KB (18,432 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\rdpsnd.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		28.00 KB (28,672 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\scredir.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		319.50 KB (327,168 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\scscui.dll
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		22.00 KB (22,528 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\msacm32.drv
		5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		69.50 KB (71,168 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\msacm32.dll
		5.2.3790.0 (srv03_rtm.030324-2048)
		15.50 KB (15,872 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\imaadp32.acm
		5.2.3790.0 (srv03_rtm.030324-2048)
		14.50 KB (14,848 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\msadp32.acm
		5.2.3790.0 (srv03_rtm.030324-2048)
		10.00 KB (10,240 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\msg711.acm
		5.2.3790.0 (srv03_rtm.030324-2048)
		20.50 KB (20,992 bytes) 3/25/2003

6:00 AM	Microsoft Corporation	
	c:\windows\system32\msgsm32.acm	
tsssoft32	1.01 9.50 KB (9,728 bytes)	
	3/25/2003 6:00 AM DSP GROUP, INC.	
	c:\windows\system32\tsssoft32.acm	
tsd32	1.03 16.50 KB (16,896 bytes)	
	3/25/2003 6:00 AM DSP GROUP, INC.	
	c:\windows\system32\tsd32.dll	
msg723	5.2.3790.1830 120.00 KB (122,880 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\msg723.acm	
msaud32	8.00.00.4487 288.00 KB (294,912 bytes)	
	3/25/2003 6:00 AM Microsoft Corporation	
	c:\windows\system32\msaud32.acm	
sl_anet	3.02 84.00 KB (86,016 bytes)	
	3/25/2003 6:00 AM Sipro Lab Telecom Inc.	
	c:\windows\system32\sl_anet.acm	
l3codeca	1, 9, 0, 0305 284.00 KB (290,816 bytes)	
	3/25/2003 6:00 AM Fraunhofer Institut Integrierte Schaltungen IIS	
	c:\windows\system32\l3codeca.acm	
printui	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 563.00 KB (576,512 bytes)	
	3/25/2003 6:00 AM Microsoft Corporation	
	c:\windows\system32\printui.dll	
cfgmgr32	5.2.3790.0 (srv03_rtm.030324-2048) 17.50 KB (17,920 bytes)	
	3/25/2003 6:00 AM Microsoft Corporation	
	c:\windows\system32\cfgmgr32.dll	
cabinet	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 81.50 KB (83,456 bytes)	
	3/24/2005 8:35 PM Microsoft Corporation	
	c:\windows\system32\cabinet.dll	
cryptnet	5.131.3790.1830 (srv03_spl_rtm.050324-1447) 61.00 KB (62,464 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\cryptnet.dll	
sensapi	5.2.3790.0 (srv03_rtm.030324-2048) 6.00 KB (6,144 bytes)	
	3/25/2003 6:00 AM Microsoft Corporation	
	c:\windows\system32\sensapi.dll	
rdpclip	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 68.00 KB (69,632 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\rdpclip.exe	
urlmon	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 673.00 KB (689,152 bytes)	
	12/7/2005 1:24 PM Microsoft Corporation	
	c:\windows\system32\urlmon.dll	
explorer	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 1.00 MB (1,050,624 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\explorer.exe	
browseui	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 1,009.00 KB (1,033,216 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\browseui.dll	
shdocvw	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 1.43 MB (1,502,720 bytes)	
	12/7/2005 1:24 PM Microsoft Corporation	
	c:\windows\system32\shdocvw.dll	
themeui	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 377.50 KB (386,560 bytes)	
	12/7/2005 1:24 PM Microsoft Corporation	
	c:\windows\system32\themeui.dll	
msimg32	5.2.3790.0 (srv03_rtm.030324-2048) 4.50 KB (4,608 bytes)	
	3/25/2003 6:00 AM Microsoft Corporation	
	c:\windows\system32\msimg32.dll	
linkinfo	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 19.00 KB (19,456 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\linkinfo.dll	
ntshrui	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 140.00 KB (143,360 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\ntshrui.dll	
webcheck	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 272.50 KB (279,040 bytes)	
	12/7/2005 1:24 PM Microsoft Corporation	
	c:\windows\system32\webcheck.dll	
stobject	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 120.50 KB (123,392 bytes)	
	12/7/2005 1:24 PM Microsoft Corporation	
	c:\windows\system32\stobject.dll	
batmeter	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 31.50 KB (32,256 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\batmeter.dll	
powrprof	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 16.50 KB (16,896 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\powrprof.dll	
shdoclc	6.00.3790.0 (srv03_rtm.030324-2048) 588.50 KB (602,624 bytes)	
	3/25/2003 6:00 AM Microsoft Corporation	
	c:\windows\system32\shdoclc.dll	
drprov	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\drprov.dll	
ntlanman	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 43.50 KB (44,544 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\ntlanman.dll	
netui0	5.2.3790.0 (srv03_rtm.030324-2048) 75.50 KB (77,312 bytes)	
	3/25/2003 6:00 AM Microsoft Corporation	
	c:\windows\system32\netui0.dll	
netuil	5.2.3790.0 (srv03_rtm.030324-2048) 184.00 KB (188,416 bytes)	
	3/25/2003 6:00 AM Microsoft Corporation	
	c:\windows\system32\netuil.dll	
davclnt	5.2.3790.0 (srv03_rtm.030324-2048) 23.50 KB (24,064 bytes)	
	3/25/2003 6:00 AM Microsoft Corporation	
	c:\windows\system32\davclnt.dll	
helpctr	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 778.00 KB (796,672 bytes)	
	12/7/2005 1:26 PM Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\helpct	
hcappres	5.2.3790.0 (srv03_rtm.030324-2048) 6.50 KB (6,656 bytes)	
	12/7/2005 12:26 PM Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\hcappres.dll	
itss	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 133.50 KB (136,704 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\itss.dll	
pchshell1	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 104.50 KB (107,008 bytes)	
	12/7/2005 1:26 PM Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\pchshell1.dll	
mlang	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 577.50 KB (591,360 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\mlang.dll	
mshtml	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 2.96 MB (3,108,864 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\mshtml.dll	
msls31	3.10.349.0 142.00 KB (145,408 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\msls31.dll	
msimtf	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 156.00 KB (159,744 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\simtf.dll	
msctf	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 311.00 KB (318,464 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\msctf.dll	
jscript	5.6.0.8827 448.00 KB (458,752 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\jscript.dll	
imm32	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 108.00 KB (110,592 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\imm32.dll	
mshtmdled	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 454.50 KB (465,408 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\mshtmdled.dll	
vbscript	5.6.0.8827 392.00 KB (401,408 bytes)	
	12/7/2005 1:24 PM Microsoft Corporation	
	c:\windows\system32\vbscript.dll	
msinfo	5.2.3790.1830 (srv03_spl_rtm.050324-1447) 376.00 KB (385,024 bytes)	
	12/7/2005 1:26 PM Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\msinfo.dll	
mfc42u	6.06.8063.0 1.11 MB (1,163,776 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\mfc42u.dll	
odbc32	3.526.1830.0 (srv03_spl_rtm.050324-1447) 240.00 KB (245,760 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	
	c:\windows\system32\odbc32.dll	
comdlg32	6.00.3790.1830 (srv03_spl_rtm.050324-1447) 274.50 KB (281,088 bytes)	
	12/7/2005 1:25 PM Microsoft Corporation	

6:00 AM	Microsoft Corporation		
	c:\windows\system32\comdlg32.dll		
odbcint	3.526.1830.0 (srv03_sp1_rtm.050324-1447)		
	92.00 KB (94,208 bytes)	12/7/2005	
1:25 PM	Microsoft Corporation		
	c:\windows\system32\odbcint.dll		
rchied32	5.2.3790.0 (srv03_rtm.030324-2048)		
	3.50 KB (3,584 bytes)	3/25/2003	
6:00 AM	Microsoft Corporation		
	c:\windows\system32\rchied32.dll		
rchied20	5.31.23.1224 439.00 KB (449,536 bytes)	12/7/2005	1:24 PM
bytes)	Microsoft Corporation		
audiodev	c:\windows\system32\audiodev.dll		
5.2.3790.3700 (srv03_sp1_rtm.050324-1447)			
	470.00 KB (481,280 bytes)	12/7/2005	1:28 PM
Microsot Corporation	c:\windows\system32\audiodev.dll		
wmvcore	10.00.00.3700 (srv03_sp1_rtm.050324-1447)		
	2.21 MB (2,314,240 bytes)	12/7/2005	1:24 PM
Microsoft Corporation	c:\windows\system32\wmvcore.dll		
wmasf	10.00.00.3700 (srv03_sp1_rtm.050324-1447)		
	220.50 KB (225,792 bytes)	12/7/2005	1:24 PM
Microsoft Corporation	c:\windows\system32\wmASF.dll		
mydocs	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	90.00 KB (92,160 bytes)	12/7/2005	1:25 PM
Microsoft Corporation	c:\windows\system32\mydocs.dll		
helpsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	745.00 KB (762,880 bytes)	12/7/2005	1:26 PM
Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\helpsv		
c.exe			
[Services]			
Display Name	Name	State	Start Mode
Service Type	Path	Error Control	
Start Name	Tag ID		
Application Experience	Lookup Service AeLookupSvc		
Running	Auto Share Process		
	c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem 0		
Alerter	Stoped	Disabled	Share Process
	c:\windows\system32\svchost.exe -k		
localservice	Normal NT		
AUTHORITY\LocalService	0		
Application Layer Gateway Service ALG			
Stopped	Manual Own Process		
	c:\windows\system32\alg.exe Normal NT		
AUTHORITY\LocalService	0		
Application Management AppMgmt	Stopped		
Manual	Share Process		
	c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem 0		
ASP.NET State Service aspnet_state			
Stopped	Manual Own Process		
	c:\windows\microsoft.net\framework\v2.0.507		
27\aspnet_state.exe	Normal NT		
AUTHORITY\NetworkService	0		

Windows Audio	AudioSrv	Running	Auto
	Share Process		
	c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem 0		
Background Intelligent Transfer Service BITS			
Stopped	Manual Share Process		
	c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem 0		
Computer Browser	Browser	Running	Auto
	Share Process		
	c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem 0		
Indexing Service CiSvc	Stopped	Disabled	
	Share Process		
	c:\windows\system32\ciscvc.exe Normal		
LocalSystem 0			
ClipBook ClipSrv	Stopped	Disabled	Own Process
	c:\windows\system32\clipsrv.exe		
Normal	LocalSystem 0		
.NET Runtime Optimization Service v2.0.50727_X86			
clr_optimization_v2.0.50727_32			
Stopped	Manual Own Process		
	c:\windows\microsoft.net\framework\v2.0.507		
27\mscorsvw.exe	Ignore	LocalSystem 0	
COM+ System Application COMSysApp	Stopped		
Manual	Own Process		
	c:\windows\system32\dllhost.exe		
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}			
Normal	LocalSystem 0		
Cryptographic Services CryptSvc	Running		
Auto	Share Process		
	c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem 0		
DCOM Server Process Launcher DcomLaunch			
Running	Auto Share Process		
	c:\windows\system32\svchost.exe -k		
dcomlaunch	Normal LocalSystem 0		
Distributed File System Dfs	Stopped		
Manual	Own Process		
	c:\windows\system32\dfsvc.exe		
Normal	LocalSystem 0		
DHCP Client Dhcp	Running	Auto	
	Share Process		
	c:\windows\system32\svchost.exe -k		
networkservice	Normal NT		
AUTHORITY\NetworkService 0			
Logical Disk Manager Administrative Service			
dmadmin	Stopped	Manual Share Process	
	c:\windows\system32\dmadmin.exe /com		
Normal	LocalSystem 0		
Logical Disk Manager dmserver	Stopped		
Disabled	Share Process		
	c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem 0		
DNS Client DnsCache	Running	Auto	
	Share Process		
	c:\windows\system32\svchost.exe -k		
networkservice	Normal NT		
AUTHORITY\NetworkService 0			

Error Reporting Service ERSvc	Running	
Auto	Share Process	
	c:\windows\system32\svchost.exe -k winerr	
Ignore	LocalSystem 0	
Event Log Eventlog	Running	Auto
	Share Process	
	c:\windows\system32\services.exe	
Normal	LocalSystem 0	
COM+ Event System EventSystem	Running	
Auto	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	
Normal	LocalSystem 0	
Help and Support helpsvc	Running	Auto
	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	
Normal	LocalSystem 0	
Human Interface Device Access HidServ	Stopped	
Disabled	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	
Normal	LocalSystem 0	
HTTP SSL HTTPFilter	Running	Manual
	Share Process	
	c:\windows\system32\lsass.exe Normal	
LocalSystem 0		
IIS Admin Service IISADMIN	Running	Auto
	Share Process	
	c:\windows\system32\inetsrv\inetinfo.exe	
Normal	LocalSystem 0	
IMAPI CD-Burning COM Service ImapiService		
Stopped	Disabled Own Process	
	c:\windows\system32\imapi.exe Normal	
LocalSystem 0		
Intersite Messaging IsmServ	Stopped	Disabled Own Process
	c:\windows\system32\ismserv.exe	
Normal	LocalSystem 0	
Kerberos Key Distribution Center kdc		
Stopped	Disabled Share Process	
	c:\windows\system32\lsass.exe Normal	
LocalSystem 0		
Server lanmanserver	Running	Auto
	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	
Normal	LocalSystem 0	
Workstation lanmanworkstation	Running	
Auto	Share Process	
	c:\windows\system32\svchost.exe -k netsvcs	
Normal	LocalSystem 0	
License Logging LicenseService	Stopped	
Disabled	Own Process	
	c:\windows\system32\llssrv.exe	
Normal	NT AUTHORITY\NetworkService 0	
TCP/IP NetBIOS Helper LmHosts	Running	
Auto	Share Process	
	c:\windows\system32\svchost.exe -k	
localservice	Normal NT	
AUTHORITY\LocalService 0		
Messenger Messenger	Stopped	Disabled Share Process
	c:\windows\system32\svchost.exe -k netsvcs	
Normal	LocalSystem 0	
NetMeeting Remote Desktop Sharing mmmsrvc		
Stopped	Disabled Own Process	

```

c:\windows\system32\mnmsrvvc.exe
Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
Running Auto Own Process
c:\windows\system32\msdtc.exe Normal NT AUTHORITY\NetworkService 1
Windows Installer MSIServer Stopped Manual
Share Process
c:\windows\system32\msiexec.exe /v
Normal LocalSystem 0
Network DDE NetDDE Stopped Disabled
Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Network DDE DSDM NetDDEsdm Stopped
Disabled Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Location Awareness (NLA) Nla
Running Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own Process
c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSsp
Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Office Source Engine ose Stopped
Manual Own Process ":"c:\program files\common files\microsoft shared\source
engine\ose.exe" Normal LocalSystem 0
Plug and Play PlugPlay Running Auto
Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
IPSEC Services PolicyAgent Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Remote Access Auto Connection Manager RasAuto
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

Remote Access Connection Manager RasMan
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Desktop Help Session Manager RDSessionMgr
Stopped Manual Own Process
c:\windows\system32\sessmgr.exe
Normal LocalSystem 0
Routing and Remote Access RemoteAccess
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Registry RemoteRegistry Running
Auto Share Process
c:\windows\system32\svchost.exe -k regsvc
Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running
Auto Share Process
c:\windows\system32\svchost.exe -k rpcss
Normal NT Authority\NetworkService 0
Resultant Set of Policy Provider RSoPProv
Stopped Manual Share Process
c:\windows\system32\rsoProv.exe
Normal LocalSystem 0
Special Administration Console Helper sacsrvr
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Smart Card SCardSrv Stopped Manual
Share Process
c:\windows\system32\scardsvr.exe
Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Secondary Logon seclogon Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
SharedAccess Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

Shell Hardware Detection ShellHWDetection
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Running Auto Own Process
c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0
Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Manual Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0
Telephony TapiSrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapiSrv
Normal LocalSystem 0
Terminal Services TermService Running
Manual Share Process
c:\windows\system32\svchost.exe -k termsvc
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0
Distributed Link Tracking Server TrkSvr
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process
c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
Stopped Manual Own Process
c:\windows\system32\wdfmgr.exe
Normal NT AUTHORITY\LocalService 0
Upload Manager uploadmgr Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT AUTHORITY\LocalService 0

```

```

Virtual Disk Service          vds      Stopped
    Manual   Own Process
    c:\windows\system32\vdsvc.exe  Normal
    LocalSystem 0
Volume Shadow Copy VSS       Stopped  Manual  Own
Process  c:\windows\system32\vssvc.exe Normal
    LocalSystem 0
Windows Time                 W32Time  Stopped  Disabled
    Share Process
    c:\windows\system32\svchost.exe -k
localservice  Normal  NT
AUTHORITY\LocalService 0
World Wide Web Publishing Service  W3SVC
    Running  Auto  Share Process
    c:\windows\system32\svchost.exe -k iissvcs
Normal  LocalSystem 0
WebClient WebClient Stopped  Disabled Share Process
    c:\windows\system32\svchost.exe -k
localservice  Normal  NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
    WinHttpAutoProxySvc Stopped  Manual
    Share Process
    c:\windows\system32\svchost.exe -k
localservice  Normal  NT
AUTHORITY\LocalService 0
Windows Management Instrumentation  winmgmt
    Running  Auto  Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Ignore  LocalSystem 0
Portable Media Serial Number Service  WndmPmSN
Stopped  Manual  Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi     Stopped  Manual  Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0
WMI Performance Adapter        WmiApSrv  Stopped
    Manual   Own Process
    c:\windows\system32\wbem\wmiapsrv.exe
Normal  LocalSystem 0
Automatic Updates wuauserv Stopped  Disabled
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0
Wireless Configuration WZCSVCSVC  Running
    Auto  Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0
Network Provisioning Service xmlprov  Stopped
    Manual  Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0
[Program Groups]
Group Name      Name      User Name
Accessories     Default User:Accessories
                Default User

```

```

Accessories\Accessibility  Default
User:Accessories\Accessibility  Default User
Accessories\Entertainment  Default
User:Accessories\Entertainment  Default User
Startup  Default User:Startup  Default User
Accessories  All Users:Accessories  All
Users
Accessories\Accessibility  All
Users:Accessories\Accessibility  All Users
Accessories\Communications  All
Users:Accessories\Communications  All Users
Accessories\Entertainment  All
Users:Accessories\Entertainment  All Users
Accessories\System Tools  All
Users:Accessories\System Tools  All Users
Administrative Tools  All
Users:Administrative Tools  All Users
Microsoft SQL Server 2005  All Users:Microsoft SQL
Server 2005  All Users
Microsoft SQL Server 2005\Configuration Tools  All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Startup  All Users:Startup  All Users
Accessories  NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM
Accessories\Accessibility  NT
AUTHORITY\SYSTEM:Accessories\Accessibility  NT
AUTHORITY\SYSTEM
Accessories\Entertainment  NT
AUTHORITY\SYSTEM:Accessories\Entertainment  NT
AUTHORITY\SYSTEM
Startup  NT AUTHORITY\SYSTEM:Startup  NT
AUTHORITY\SYSTEM
Accessories  CL55\Administrator:Accessories
CL55\Administrator
Accessories\Accessibility
CL55\Administrator:Accessories\Accessibilit
y
CL55\Administrator
Accessories\Entertainment
CL55\Administrator:Accessories\Entertainmen
t
CL55\Administrator
Administrative Tools
CL55\Administrator:Administrative Tools
CL55\Administrator
Startup  CL55\Administrator:Startup
CL55\Administrator
[Startup Programs]
Program  Command  User Name Location
desktop  desktop.ini  NT AUTHORITY\SYSTEM
Startup
desktop  desktop.ini  CL55\Administrator
Startup
desktop  desktop.ini  .DEFAULT Startup
desktop  desktop.ini  All Users Common
Startup

```

```

[OLE Registration]
Object  Local Server
Sound (OLE2)  sndrec32.exe
Media Clip  mplay32.exe
Video Clip  mplay32.exe /avi
MIDI Sequence  mplay32.exe /mid
Sound  Not Available
Media Clip  Not Available
WordPad Document  "%programfiles%\windows
nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object  Not
Available
Bitmap Image  mspaint.exe
[Windows Error Reporting]
Time  Type  Details
[Internet Settings]
[Internet Explorer]
[ Following are sub-categories of this main category
]
[Summary]
Item  Value
Version  6.0.3790.1830
Build  63790.1830
Application Path  C:\Program Files\Internet
Explorer
Language  English (United States)
Active Printer  Labprinter on inforb (from
DADAMS) in session 1,winspool,TS003
Cipher Strength  128-bit
Content Advisor  Disabled
IEAK Install  No
[file Versions]
File  Version  Size  Date  Path
actxprxy.dll  6.0.3790.1830  97 KB
3/24/2005 6:55:26 PM
C:\WINDOWS\system32 Microsoft Corporation
advpack.dll  6.0.3790.1830  98 KB
3/24/2005 6:55:28 PM
C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx  6.0.3790.0  90 KB
3/25/2003 7:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation
browselc.dll  6.0.3790.0  62 KB
3/25/2003 7:00:00 AM

```

C:\WINDOWS\system32	Microsoft Corporation	
browseui.dll	6.0.3790.1830	1,009 KB
	3/24/2005 6:56:10 PM	
C:\WINDOWS\system32	Microsoft Corporation	
cdfview.dll	6.0.3790.1830	149 KB
	3/24/2005 6:56:32 PM	
C:\WINDOWS\system32	Microsoft Corporation	
comct132.dll	5.82.3790.1830	585 KB
	3/24/2005 6:57:56 PM	
C:\WINDOWS\system32	Microsoft Corporation	
dxtrans.dll	6.3.3790.1830	205 KB
	3/24/2005 7:00:58 PM	
C:\WINDOWS\system32	Microsoft Corporation	
dxtmsft.dll	6.3.3790.1830	355 KB
	3/24/2005 7:00:58 PM	
C:\WINDOWS\system32	Microsoft Corporation	
iecont.dll	<File Missing>	Not Available
Not Available	Not Available	Not Available
iecontlcl.dll	<File Missing>	Not Available
Not Available	Not Available	Not Available
Available		
iedkcs32.dll	16.0.3790.1830	324 KB
	3/24/2005 7:04:58 PM	
C:\WINDOWS\system32	Microsoft Corporation	
ipeers.dll	6.0.3790.1830	248 KB
	3/24/2005 7:04:58 PM	
C:\WINDOWS\system32	Microsoft Corporation	
iesetup.dll	6.0.3790.1830	61 KB
	3/24/2005 7:04:58 PM	
C:\WINDOWS\system32	Microsoft Corporation	
ieuinit.inf	Not Available	24 KB
	3/24/2005 7:04:58 PM	
C:\WINDOWS\system32	Not Available	
iexplore.exe	6.0.3790.1830	92 KB
	3/24/2005 7:04:58 PM	
C:\Program Files\Internet Explorer	Microsoft Corporation	
imgutil.dll	6.0.3790.1830	38 KB
	3/24/2005 7:05:04 PM	
C:\WINDOWS\system32	Microsoft Corporation	
inetcpl.cpl	6.0.3790.1830	358 KB
	3/24/2005 7:05:06 PM	
C:\WINDOWS\system32	Microsoft Corporation	
inetcpcl.dll	6.0.3790.0	109 KB
	3/25/2003 7:00:00 AM	
C:\WINDOWS\system32	Microsoft Corporation	
inseng.dll	6.0.3790.1830	94 KB
	3/24/2005 7:05:06 PM	

C:\WINDOWS\system32	Microsoft Corporation		
mlang.dll	6.0.3790.1830	578 KB	3/24/2005
	7:07:20 PM		C:\WINDOWS\system32 Microsoft
Corporation			
msencode.dll	2002.10.4.0	112 KB	
	3/25/2003 7:00:00 AM		
C:\WINDOWS\system32	?????v??		
mshta.exe	6.0.3790.1830	30 KB	3/24/2005
	7:07:26 PM		C:\WINDOWS\system32 Microsoft
Corporation			
mshtml.dll	6.0.3790.1830	3,036 KB	
	3/24/2005 7:07:26 PM		C:\WINDOWS\system32 Microsoft
Corporation			
mshtml.tb	6.0.3790.1830	1,320 KB	
	3/24/2005 7:07:26 PM		C:\WINDOWS\system32 Microsoft
Corporation			
mshtmled.dll	6.0.3790.1830	455 KB	
	3/24/2005 7:07:26 PM		C:\WINDOWS\system32 Microsoft
Corporation			
mshtmler.dll	6.0.3790.1830	56 KB	
	3/24/2005 7:07:26 PM		C:\WINDOWS\system32 Microsoft
Corporation			
msident.dll	6.0.3790.1830	48 KB	
	3/24/2005 7:07:28 PM		C:\WINDOWS\system32 Microsoft
Corporation			
msidntld.dll	6.0.3790.0	15 KB	
	3/25/2003 7:00:00 AM		C:\WINDOWS\system32 Microsoft
Corporation			
msieftp.dll	6.0.3790.1830	244 KB	
	3/24/2005 7:07:28 PM		C:\WINDOWS\system32 Microsoft
Corporation			
msrating.dll	6.0.3790.1830	144 KB	
	3/24/2005 7:07:36 PM		C:\WINDOWS\system32 Microsoft
Corporation			
mstime.dll	6.0.3790.1830	523 KB	
	3/24/2005 7:07:38 PM		C:\WINDOWS\system32 Microsoft
Corporation			
occache.dll	6.0.3790.1830	94 KB	
	3/24/2005 7:08:34 PM		C:\WINDOWS\system32 Microsoft
Corporation			
proctexe.ocx	6.3.3790.1830	83 KB	
	3/24/2005 7:12:26 PM		C:\WINDOWS\system32 Intel Corporation
sendmail.dll	6.0.3790.1830	56 KB	
	3/24/2005 7:13:36 PM		C:\WINDOWS\system32 Microsoft
Corporation			
shdoclc.dll	6.0.3790.0	589 KB	
	3/25/2003 7:00:00 AM		

C:\WINDOWS\system32	Microsoft Corporation		
shdocvw.dll	6.0.3790.1830	1,468 KB	
	3/24/2005 7:13:36 PM		
C:\WINDOWS\system32	Microsoft Corporation		
shfolder.dll	6.0.3790.1830	25 KB	
	3/24/2005 7:13:36 PM		
C:\WINDOWS\system32	Microsoft Corporation		
shlwapi.dll	6.0.3790.1830	314 KB	
	3/24/2005 7:13:40 PM		
C:\WINDOWS\system32	Microsoft Corporation		
tdc.ocx	1.3.0.3130	58 KB	3/25/2003
	7:00:00 AM		C:\WINDOWS\system32 Microsoft
Corporation			
url.dll	6.0.3790.1830	37 KB	3/24/2005
	7:26:12 PM		C:\WINDOWS\system32 Microsoft
Corporation			
urlmon.dll	6.0.3790.1830	673 KB	
	3/24/2005 7:26:12 PM		C:\WINDOWS\system32 Microsoft
Corporation			
webcheck.dll	6.0.3790.1830	273 KB	
	3/24/2005 7:26:16 PM		C:\WINDOWS\system32 Microsoft
Corporation			
wininet.dll	6.0.3790.1830	646 KB	
	3/24/2005 7:26:18 PM		C:\WINDOWS\system32 Microsoft
Corporation			
[Connectivity]			
Item	Value		
Connection Preference	Never dial		
LAN Settings			
AutoConfigProxy	wininet.dll		
AutoProxyDetectMode	Disabled		
AutoConfigURL			
Proxy	Disabled		
ProxyServer			
ProxyOverride			
[Cache]			
[Following are sub-categories of this main category]			
[Summary]			
Item	Value		
Page Refresh Type	Automatic		
Temporary Internet Files Folder	C:\Documents and Settings\Administrator\Local Settings\Temporary Internet Files		
Total Disk Space	Not Available		
Available Disk Space	Not Available		
Maximum Cache Size	Not Available		

Available Cache Size Not Available

[List of Objects]

Program File Status CodeBase
No cached object information available

[Content]

[Following are sub-categories of this main category]

[Summary]

Item Value
Content Advisor Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Custom
Trusted sites	Custom
Internet	Custom
Restricted sites	Custom

Microsoft COM Component Configuration Parameters

The component services tool in Windows 2003 was used to change the queue settings for the TPCC COM+ queue components. All tpcc queue components were set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The construction string was Server =

myserver; UID= sa; pwd=; DATABASE= tpcc; The single queue TpccAllTxn object was used, with the Min and Max both being set to 80 queues. Delivery threads were set under the TPCC key in the registry.

Internet Information Server Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 2:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters
Class Name: <NO CLASS>
Last Write Time: 9/14/2006 - 9:53 AM

Value 0	Name: ListenBackLog Type: REG_DWORD Data: 0x8ca0
Value 1	Name: PoolThreadLimit Type: REG_DWORD Data: 0x1ffc
Value 2	Name: MaxPoolThreads Type: REG_DWORD Data: 0xffff
Value 3	Name: ThreadTimeout Type: REG_DWORD Data: 0x15180

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Performance
Class Name: <NO CLASS>

Last Write Time:	12/7/2005 - 2:51 PM
Value 0	Name: Library Type: REG_SZ Data: infoctr.dll
Value 1	Name: Open Type: REG_SZ Data: OpenINFOPerformanceData
Value 2	Name: Close Type: REG_SZ Data: CloseINFOPerformanceData
Value 3	Name: Collect Type: REG_SZ Data: CollectINFOPerformanceData
Value 4	Name: PerfIniFile Type: REG_SZ Data: infoctr.ini
Value 5	Name: Last Counter Type: REG_DWORD Data: 0xc4c
Value 6	Name: Last Help Type: REG_DWORD Data: 0xc4d
Value 7	Name: First Counter Type: REG_DWORD Data: 0xc0c
Value 8	Name: First Help Type: REG_DWORD Data: 0xc0d
Value 9	Name: Object List Type: REG_SZ Data: 3084
Value 10	Name: Library Validation Code Type: REG_BINARY Data: 00000000 00 fa 22 9f 67 fb c5 01 - 00 20 00 00 00 00 00 00 .ú".gúA.....

World Wide Web Service Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC
Class Name: <NO CLASS>
Last Write Time: 9/18/2006 - 1:57 PM
Value 0
Name: Type
Type: REG_DWORD
Data: 0x20

Value 1
Name: Start
Type: REG_DWORD
Data: 0x2

Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 3
Name: ImagePath
Type: REG_EXPAND_SZ
Data: %SystemRoot%\System32\svchost.exe
-k liisvcs

Value 4
Name: DisplayName
Type: REG_SZ
Data: World Wide Web Publishing Service

Value 5
Name: DependOnService
Type: REG_MULTI_SZ
Data: RPCSS
HTTPFilter
IISADMIN

Value 6
Name: DependOnGroup
Type: REG_MULTI_SZ
Data:

Value 7
Name: ObjectName
Type: REG_SZ
Data: LocalSystem

Value 8

Name: Description
Type: REG_SZ
Data: Provides Web connectivity and administration through the Internet Information Services Manager

Value 9
Name: FailureActions
Type: REG_BINARY
Data:
00000000 80 51 01 00 00 00 00 00 - 00 00 00 00 00 03
00 00 00 Q.....
00000010 43 00 4c 00 01 00 00 00 - 01 00 00 00 01
00 00 C.L.....
01 00 00 01 00 00 00 - 01 00 00 00
.....

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 3:01 PM
Value 0
Name: MajorVersion
Type: REG_DWORD
Data: 0x6

Value 1
Name: MinorVersion
Type: REG_DWORD
Data: 0

Value 2
Name: InstallPath
Type: REG_SZ
Data: C:\WINDOWS\system32\inetsrv

Value 3
Name: AccessDeniedMessage
Type: REG_SZ
Data: Error: Access is Denied.

Value 4
Name: ServiceDll
Type: REG_EXPAND_SZ
Data:
C:\WINDOWS\system32\inetsrv\iisw3adm.dll

Value 5
Name: AcceptExOutstanding
Type: REG_DWORD
Data: 0x28

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 2:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 2:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 2:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 2:51 PM
Value 0
Name: Library
Type: REG_SZ
Data:
C:\WINDOWS\system32\inetsrv\w3ctrsl.dll

Value 1
Name: Open
Type: REG_SZ
Data: OpenW3PerformanceData

Value 2
Name: Close
Type: REG_SZ
Data: CloseW3PerformanceData

Value 3
Name: Collect
Type: REG_SZ
Data: CollectW3PerformanceData

Value 4
Name: PerfIniFile
Type: REG_SZ
Data: w3ctrsl.ini

Value 5
Name: Last Counter
Type: REG_DWORD
Data: 0xd44

Value 6
Name: Last Help
Type: REG_DWORD
Data: 0xd45

Value 7
Name: First Counter
Type: REG_DWORD
Data: 0xc4e

Value 8
Name: First Help
Type: REG_DWORD

Data: 0xc4f

Value 9
 Name: Object List
 Type: REG_SZ
 Data: 3150 3324

Value 10
 Name: Library Validation Code
 Type: REG_BINARY
 Data:
 00000000 00 27 54 a0 67 fb c5 01 - 00 5e 00 00 00
 00 00 00 .'T g6A..^.....

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security
 Class Name: <NO CLASS>
 Last Write Time: 12/7/2005 - 2:51 PM

Value 0
 Name: Security
 Type: REG_BINARY
 Data:
 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
 00 00 00Ä.....
 00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
 80 14 00 0.....
 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
 00 00 00 Ÿ.....
 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
 01 02 00ŷ...
 00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
 00 18 00
 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
 00 00 00 Ÿ.....
 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
 01 00 00
 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
 01 02 00
 00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
 00 14 00
 00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
 00 00 00
 000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
 00 00 05ŷ.....
 000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
 00 00 05 ...#.....
 000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
 00 00 00

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Enum
 Class Name: <NO CLASS>
 Last Write Time: 9/18/2006 - 1:57 PM

Value 0
 Name: 0

Type: REG_SZ
 Data: Root\LEGACY_W3SVC\0000

Value 1
 Name: Count
 Type: REG_DWORD
 Data: 0x1

Value 2
 Name: NextInstance
 Type: REG_DWORD
 Data: 0x1

Value 6
 Name: DbServer
 Type: REG_SZ
 Data: MESA

Value 7
 Name: DbName
 Type: REG_SZ
 Data: tpcc

Value 8
 Name: DbUser
 Type: REG_SZ
 Data: sa

Value 9
 Name: DbPassword
 Type: REG_SZ
 Data:

Value 10
 Name: COM_SinglePool
 Type: REG_SZ
 Data: YES

Value 11
 Name: CallNoDuplicatesNewOrder
 Type: REG_DWORD
 Data: 0x1

Value 12
 Name: ConnectDelay
 Type: REG_DWORD
 Data: 0x1

TPCC Application Registry Parameters

Key Name:
 HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC
 Class Name: <NO CLASS>
 Last Write Time: 9/18/2006 - 1:51 PM

Value 0
 Name: Path
 Type: REG_SZ
 Data: C:\Inetpub\wwwroot\

Value 1
 Name: NumberOfDeliveryThreads
 Type: REG_DWORD
 Data: 0xc

Value 2
 Name: MaxConnections
 Type: REG_DWORD
 Data: 0x88b8

Value 3
 Name: MaxPendingDeliveries
 Type: REG_DWORD
 Data: 0x7d0

Value 4
 Name: DB_Protocol
 Type: REG_SZ
 Data: ODBC

Value 5
 Name: TxnMonitor
 Type: REG_SZ
 Data: COM

Benchcraft Profile
 Profile: longshot_20800_8cl_mod3
 File Path: C:\David_585\longshot_20800_8cl_mod3.xml
 Version: 5

Number of Engines: 16

Name: RTE2
 Description:
 Directory: c:\blog\rte2.log
 Machine: n25
 Parameter Set: 2.2
 Index: 1600000000
 Seed: 4678
 Configured Users: 13060
 Pipe Name: DRIVER53164609
 Connect Rate: 10
 Start Rate: 0

```

Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE1
Description:
Directory: c:\blog\rte1.log
Machine: n25
Parameter Set: 2.2
Index: 70000000
Seed: 4678
Configured Users: 13060
Pipe Name: DRIVER44265281
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE3
Description:
Directory: c:\blog\rte3.log
Machine: n26
Parameter Set: 2.2
Index: 20000000
Seed: 4678
Configured Users: 13060
Pipe Name: DRIVER3439676359
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE4
Description:
Directory: c:\blog\rte4.log
Machine: n26
Parameter Set: 2.2
Index: 30000000
Seed: 4678
Configured Users: 13060
Pipe Name: DRIVER4439706187
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE5
Description:
Directory: c:\blog\rte5.log
Machine: n27

```

```

Parameter Set: 2.2
Index: 40000000
Seed: 4678
Configured Users: 13060
Pipe Name: DRIVER5346413218
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE6
Description:
Directory: c:\blog\rte6.log
Machine: n27
Parameter Set: 2.2
Index: 50000000
Seed: 4678
Configured Users: 13060
Pipe Name: DRIVER62226046
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE7
Description:
Directory: c:\blog\rte7.log
Machine: n28
Parameter Set: 2.2
Index: 60000000
Seed: 4678
Configured Users: 13060
Pipe Name: DRIVER72289718
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE8
Description:
Directory: c:\blog\rte8.log
Machine: n28
Parameter Set: 2.2
Index: 17000000
Seed: 4678
Configured Users: 13060
Pipe Name: DRIVER82325578
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25

```

```

CPU: 1
Additional Options:

Name: RTE9
Description:
Directory: c:\blog\rte9.log
Machine: n29
Parameter Set: 2.2
Index: 80000000
Seed: 4678
Configured Users: 12930
Pipe Name: DRIVER92360187
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE10
Description:
Directory: c:\blog\rte10.log
Machine: n29
Parameter Set: 2.2
Index: 90000000
Seed: 4678
Configured Users: 12930
Pipe Name: DRIVER102399796
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE11
Description:
Directory: c:\blog\rte11.log
Machine: n30
Parameter Set: 2.2
Index: 100000000
Seed: 4678
Configured Users: 12930
Pipe Name: DRIVER1122682203
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE12
Description:
Directory: c:\blog\rte12.log
Machine: n30
Parameter Set: 2.2
Index: 110000000
Seed: 4678

```

```

Configured Users: 12930
Pipe Name: DRIVER1222731546
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE13
Description:
Directory: c:\blog\rte13.log
Machine: n46
Parameter Set: 2.2
Index: 1200000000
Seed: 4678
Configured Users: 12950
Pipe Name: DRIVER13-1439076421
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE14
Description:
Directory: c:\blog\rte14.log
Machine: n45
Parameter Set: 2.2
Index: 1300000000
Seed: 4678
Configured Users: 12950
Pipe Name: DRIVER14-1438943656
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE15
Description:
Directory: c:\blog\rte15.log
Machine: n46
Parameter Set: 2.2
Index: 1400000000
Seed: 4678
Configured Users: 12950
Pipe Name: DRIVER15-1438852265
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

```

```

Name: RTE16
Description:
Directory: c:\blog\rte16.log
Machine: n46
Parameter Set: 2.2
Index: 1500000000
Seed: 4678
Configured Users: 12950
Pipe Name: DRIVER16-1438790906
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Number of User groups: 16

Driver Engine: RTE1
IIS Server: cr55
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3919 - 5224
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 13060
District id: 1
Scale Down: No

Driver Engine: RTE2
IIS Server: cr55
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1 - 1306
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 13060
District id: 1
Scale Down: No

Driver Engine: RTE3
IIS Server: cr56
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1307 - 2612
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 13060
District id: 1
Scale Down: No

Driver Engine: RTE4
IIS Server: cr56
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2613 - 3918
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 13060
District id: 1
Scale Down: No

```

```

Driver Engine: RTE5
IIS Server: cr57
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 5225 - 6530
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 13060
District id: 1
Scale Down: No

Driver Engine: RTE6
IIS Server: cr57
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 6531 - 7836
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 13060
District id: 1
Scale Down: No

Driver Engine: RTE7
IIS Server: cr58
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 7837 - 9142
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 13060
District id: 1
Scale Down: No

Driver Engine: RTE8
IIS Server: cr58
SQL Server: longshot
Database: tpcc
User: sa

```

```

Protocol: HTML
w_id Range: 9143 - 10448
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 13060
District id: 1
Scale Down: No

Driver Engine: RTE9
IIS Server: cr59
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 10449 - 11741
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 12930
District id: 1
Scale Down: No

Driver Engine: RTE10
IIS Server: cr59
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 11742 - 13034
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 12930
District id: 1
Scale Down: No

Driver Engine: RTE11
IIS Server: cr60
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 13035 - 14327
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 12930
District id: 1
Scale Down: No

Driver Engine: RTE12
IIS Server: cr60
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 14328 - 15620
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal

```

```

User Count: 12930
District id: 1
Scale Down: No

Driver Engine: RTE13
IIS Server: cr79
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 15621 - 16915
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 12950
District id: 1
Scale Down: No

Driver Engine: RTE14
IIS Server: cr79
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 16916 - 18210
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 12950
District id: 1
Scale Down: No

Driver Engine: RTE15
IIS Server: cr80
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 18211 - 19505
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 12950
District id: 1
Scale Down: No

Driver Engine: RTE16
IIS Server: cr80
SQL Server: longshot
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 19506 - 20800
w_id Min Warehouse: 1
w_id Max Warehouse: 20800
Scale: Normal
User Count: 12950
District id: 1
Scale Down: No

Number of Parameter Sets: 67

```

Key	RT	RT	Menu	Default Parameter Set	
				Delay	Fence
Time				New Order	10.00
12.05	18.01			0.10	5.00
				Payment	10.00
12.05		3.01		0.10	5.00
				Delivery	1.00
5.05		2.01		0.10	5.00
				Stock Level	1.00
5.05		2.01		0.10	20.00
				Order Status	1.00
10.05		2.01		0.10	5.00
				Tuned Distribution	
Key	RT	RT	Menu	Tuned Distribution	
				Delay	Fence
Time				New Order	44.75
12.05	18.01			0.10	5.00
				Payment	43.10
12.05		3.01		0.10	5.00
				Delivery	4.05
5.05		2.01		0.10	5.00
				Stock Level	4.05
5.05		2.01		0.10	20.00
				Order Status	4.05
10.05		2.01		0.10	5.00
				No Think	
Key	RT	RT	Menu	No Think	
				Delay	Fence
Time				New Order	10.00
0.00		0.00		0.00	5.00
				Payment	10.00
0.00		0.00		0.00	5.00
				Delivery	1.00
0.00		0.00		0.00	5.00
				Stock Level	1.00
0.00		0.00		0.00	20.00
				Order Status	1.00
0.00		0.00		0.00	5.00
				95%	
Key	RT	RT	Menu	95%	
				Delay	Fence
Time				New Order	44.75
13.00	18.01			0.10	5.00
				Weight	Time

3.8 tt						
Key	RT	RT	Menu	Txn	Think	
13.00	3.01	Payment 0.10	5.00	0.10	43.10	
		Delivery 0.10	5.00	0.10	4.05	
6.00	2.01	Stock Level 0.10	5.00	0.10	4.05	
6.00	2.01	Order Status 0.10	20.00	0.10	4.05	
11.00	2.01	0.10	5.00	0.10	4.05	
		90%				
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
		New Order		44.83		
16.00	18.01	0.10	5.00	0.10		
		Payment		43.05		
16.00	3.01	0.10	5.00	0.10		
		Delivery		4.04		
9.00	2.01	0.10	5.00	0.10		
		Stock Level		4.04		
9.00	2.01	0.10	20.00	0.10		
		Order Status		4.04		
14.00	2.01	0.10	5.00	0.10		
		3.0				
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
		New Order		44.75		
36.15	0.00	0.10	5.00	0.10		
		Payment		43.10		
36.15	0.00	0.10	5.00	0.10		
		Delivery		4.05		
15.15	0.00	0.10	5.00	0.10		
		Stock Level		4.05		
15.15	0.00	0.10	20.00	0.10		
		Order Status		4.05		
30.15	0.00	0.10	5.00	0.10		
		4.0				
		4.0 tt				
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
		New Order		44.75		
48.20	18.01	0.10	5.00	0.10		
		Payment		43.10		
48.20	3.01	0.10	5.00	0.10		
		Delivery		4.05		
20.20	2.01	0.10	5.00	0.10		
		Stock Level		4.05		
20.20	2.01	0.10	20.00	0.10		
		Order Status		4.05		
40.20	2.01	0.10	5.00	0.10		
		3.8				
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
		New Order		44.75		
16.10	2.01	0.10	5.00	0.10		
		Stock Level		4.05		
16.10	2.01	0.10	20.00	0.10		
		Order Status		4.05		
32.10	2.01	0.10	5.00	0.10		
		2.8				
		2.8 tt				
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
		New Order		44.75		
33.74	18.01	0.10	5.00	0.10		
		Payment		43.10		
33.74	3.01	0.10	5.00	0.10		
		Delivery		4.05		
14.14	2.01	0.10	5.00	0.10		
		Stock Level		4.05		
14.14	2.01	0.10	20.00	0.10		
		Order Status		4.05		
28.14	2.01	0.10	5.00	0.10		
		2.6				
		2.6 tt				
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
		New Order		44.75		
31.30	18.01	0.10	5.00	0.10		
		Payment		43.10		
31.30	3.01	0.10	5.00	0.10		
		Delivery		4.05		
13.10	2.01	0.10	5.00	0.10		
		Stock Level		4.05		
13.10	2.01	0.10	20.00	0.10		
		Order Status		4.05		
26.10	2.01	0.10	5.00	0.10		
		2.4				
		2.4 tt				
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
		New Order		44.75		
28.90	18.01	0.10	5.00	0.10		
		Payment		43.10		
28.90	3.01	0.10	5.00	0.10		
		Delivery		4.05		
12.10	2.01	0.10	5.00	0.10		
		Stock Level		4.05		
12.10	2.01	0.10	20.00	0.10		
		Order Status		4.05		
24.10	2.01	0.10	5.00	0.10		
		2.2				
		2.2 tt				

Key	RT	RT	Menu	Txn		Think		Stock Level	4.05	0.10	Weight		Time			
				Weight	Time	Weight	Time				Time	Delay	Fence	Delay		
Time	Delay	Fence	Delay	New Order	44.75			22.70	2.01	0.10	20.00	0.10	19.20	18.01	0.10	
28.90	18.01	0.10	5.00	0.10		45.20	2.01	Order Status	4.05	5.00	0.10		5.00	0.10		
			Payment		43.10				3.5							
28.90	3.01	0.10	5.00	0.10					3.5 tt							
			Delivery		4.05											
12.10	2.01	0.10	5.00	0.10												
			Stock Level		4.05											
12.10	2.01	0.10	20.00	0.10												
			Order Status		4.05											
24.12	2.01	0.10	5.00	0.10												
				2.0												
				2.0 tt												
Key	RT	RT	Menu	Txn		Think		Stock Level	4.05	0.10	Weight		Time			
				Weight	Time	Weight	Time				Time	Delay	Fence	Delay	New Order	44.75
Time	Delay	Fence	Delay	New Order	44.75			17.60	2.01	0.10	5.00	0.10	16.87	18.01	0.10	
24.10	18.01	0.10	5.00	0.10		35.10	2.01	Order Status	4.05	5.00	0.10		5.00	0.10		
			Payment		43.10				1.8							
24.10	3.01	0.10	5.00	0.10					1.8 tt							
			Delivery		4.05											
10.10	2.01	0.10	5.00	0.10												
			Stock Level		4.05											
10.10	2.01	0.10	20.00	0.10												
			Order Status		4.05											
20.10	2.01	0.10	5.00	0.10												
				5.0												
				5.0 tt												
Key	RT	RT	Menu	Txn		Think		Stock Level	4.05	0.10	Weight		Time			
				Weight	Time	Weight	Time				Time	Delay	Fence	Delay	New Order	44.75
Time	Delay	Fence	Delay	New Order	44.75			9.09	2.01	0.10	5.00	0.10	14.46	18.01	0.10	
60.25	18.01	0.10	5.00	0.10		18.09	2.01	Order Status	4.05	5.00	0.10		5.00	0.10		
			Payment		43.10				4.2							
60.25	3.01	0.10	5.00	0.10					4.2 tt							
			Delivery		4.05											
25.25	2.01	0.10	5.00	0.10												
			Stock Level		4.05											
25.25	2.01	0.10	20.00	0.10												
			Order Status		4.05											
50.25	2.01	0.10	5.00	0.10												
				4.5												
				4.5 tt												
Key	RT	RT	Menu	Txn		Think		Stock Level	4.05	0.10	Weight		Time			
				Weight	Time	Weight	Time				Time	Delay	Fence	Delay	New Order	44.75
Time	Delay	Fence	Delay	New Order	44.75			22.70	2.01	0.10	20.00	0.10	42.10	18.01	0.10	
54.20	18.01	0.10	5.00	0.10		45.20	2.01	Order Status	4.05	5.00	0.10		5.00	0.10		
			Payment		43.10				1.6							
54.20	3.01	0.10	5.00	0.10					1.6 tt							
			Delivery		4.05											
22.70	2.01	0.10	5.00	0.10												
Key	RT	RT	Menu	Txn		Think		Stock Level	4.05	0.10	Weight		Time			
				Weight	Time	Weight	Time				Time	Delay	Fence	Delay	New Order	44.75
Time	Delay	Fence	Delay	New Order	44.75			17.60	2.01	0.10	5.00	0.10	42.10	18.01	0.10	
54.20	18.01	0.10	5.00	0.10		17.60	2.01	Order Status	4.05	5.00	0.10		5.00	0.10		
			Payment		43.10				1.6							
54.20	3.01	0.10	5.00	0.10					1.6 tt							
			Delivery		4.05											
22.70	2.01	0.10	5.00	0.10												

1.04 tt									
Key		RT	RT	Menu	Txn	Think	Delivery		4.04
Time		Delay	Fence	Delay	Weight	Time	Stock Level		0.10
13.49		3.01	Payment	43.10	12.53		18.01	New Order	44.83
5.65		2.01	Delivery	4.05	12.53		3.01	Payment	43.05
5.65		2.01	0.10	5.00	5.25		0.10	Delivery	4.04
5.65		2.01	Stock Level	4.05	5.25		0.10	Stock Level	4.04
11.25		2.01	0.10	20.00	10.45		2.01	Order Status	4.04
11.25		2.01	Order Status	4.05	12.41		18.01	New Order	44.83
11.25		2.01	0.10	5.00	12.41		3.01	Payment	43.05
11.25		2.01	1.18		5.20		0.10	Delivery	4.04
11.25		2.01	1.18 tt		5.20		0.10	Stock Level	4.04
11.25		2.01	1.18 tt		10.35		2.01	Order Status	4.04
14.21		18.01	Payment	43.10	12.41		18.01	New Order	44.83
14.21		3.01	Delivery	4.05	12.41		3.01	Payment	43.05
5.95		2.01	0.10	5.00	5.20		0.10	Delivery	4.04
5.95		2.01	Stock Level	4.05	5.20		0.10	Stock Level	4.04
5.95		2.01	0.10	20.00	10.35		2.01	Order Status	4.04
11.85		2.01	Order Status	4.05	12.41		18.01	New Order	44.83
11.85		2.01	0.10	5.00	12.41		3.01	Payment	43.05
11.85		2.01	1.22		5.20		0.10	Delivery	4.04
11.85		2.01	1.22 tt		5.20		0.10	Stock Level	4.04
11.85		2.01	1.22 tt		10.35		2.01	Order Status	4.04
14.70		18.01	Payment	43.10	12.41		18.01	New Order	44.83
14.70		3.01	Delivery	4.05	12.41		3.01	Payment	43.05
6.16		2.01	0.10	5.00	5.20		0.10	Delivery	4.04
6.16		2.01	Stock Level	4.05	5.20		0.10	Stock Level	4.04
6.16		2.01	0.10	20.00	10.35		2.01	Order Status	4.04
12.26		2.01	Order Status	4.05	12.41		18.01	New Order	44.83
12.26		2.01	0.10	5.00	12.41		3.01	Payment	43.05
12.26		2.01	1.28		5.15		0.10	Delivery	4.04
12.26		2.01	1.28 tt		5.15		0.10	Stock Level	4.04
12.26		2.01	1.28 tt		10.25		2.01	Order Status	4.04
15.42		18.01	Payment	43.10	12.41		18.01	New Order	44.83
15.42		3.01	Delivery	4.05	12.41		3.01	Payment	43.05
6.46		2.01	0.10	5.00	5.15		0.10	Delivery	4.04
6.46		2.01	Stock Level	4.05	5.15		0.10	Stock Level	4.04
6.46		2.01	0.10	20.00	10.25		2.01	Order Status	4.04
12.86		2.01	Order Status	4.05	12.41		18.01	New Order	44.83
12.86		2.01	0.10	5.00	12.41		3.01	Payment	43.05
12.86		2.01	1.04		12.17		0.10	Delivery	4.04
12.86		2.01	1.04		12.17		0.10	Stock Level	4.04
12.86		2.01	1.04		12.17		0.10	Order Status	4.04

Key	RT	RT	Menu	Txn		Think		Stock Level	4.03	Weight	Time
				Weight	Time	Weight	Time				
Time	Delay	Fence	Delay								
			New Order	44.90							
12.11	18.01	0.10	5.00	0.10				5.15	2.01	0.00	20.00
			Payment	43.05				10.25	2.01	0.00	5.00
12.11	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.07	2.01	0.10	5.00	0.10							
			Stock Level	4.03							
5.07	2.01	0.10	20.00	0.10							
			Order Status	4.01							
10.10	2.01	0.10	5.00	0.10							
			1.02 better								
			1.02 tt more aggressive								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.90							
12.29	18.01	0.10	5.00	0.10							
			Payment	43.01							
12.29	3.01	0.10	5.00	0.10							
			Delivery	4.02							
5.15	2.01	0.10	5.00	0.10							
			Stock Level	4.03							
5.15	2.01	0.10	20.00	0.10							
			Order Status	4.02							
10.25	2.01	0.10	5.00	0.10							
			1.01 best								
			1.01 tt best								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.90							
12.17	18.01	0.10	5.00	0.10							
			Payment	43.05							
12.17	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.10	2.01	0.10	5.00	0.10							
			Stock Level	4.03							
5.10	2.01	0.10	20.00	0.10							
			Order Status	4.01							
10.15	2.01	0.10	5.00	0.10							
			1.02 best								
			1.02 tt best								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.96							
12.29	18.01	0.00	5.00	0.00							
			Payment	43.00							
12.29	3.01	0.00	5.00	0.00							
			Delivery	4.00							
5.15	2.01	0.00	5.00	0.00							
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.96							
12.29	18.01	0.10	5.00	0.10							
			Payment	43.05							
12.29	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.15	2.01	0.10	5.00	0.10							
			1.02 better								
			1.02 tt more aggressive								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.96							
12.33	18.01	0.10	5.00	0.10							
			Payment	43.05							
12.33	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.15	2.01	0.10	5.00	0.10							
			Stock Level	4.03							
5.15	2.01	0.10	20.00	0.10							
			Order Status	4.01							
10.33	2.01	0.10	5.00	0.10							
			1.02 best								
			1.02 tt best								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.96							
12.33	18.01	0.10	5.00	0.10							
			Payment	43.05							
12.33	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.15	2.01	0.10	5.00	0.10							
			Stock Level	4.03							
5.15	2.01	0.10	20.00	0.10							
			Order Status	4.01							
10.33	2.01	0.10	5.00	0.10							
			1.02 best								
			1.02 tt best								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.96							
12.33	18.01	0.10	5.00	0.10							
			Payment	43.05							
12.33	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.15	2.01	0.10	5.00	0.10							
			Stock Level	4.03							
5.15	2.01	0.10	20.00	0.10							
			Order Status	4.01							
10.33	2.01	0.10	5.00	0.10							
			1.02 best								
			1.02 tt best								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.96							
12.33	18.01	0.10	5.00	0.10							
			Payment	43.05							
12.33	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.15	2.01	0.10	5.00	0.10							
			Stock Level	4.03							
5.15	2.01	0.10	20.00	0.10							
			Order Status	4.01							
10.33	2.01	0.10	5.00	0.10							
			1.02 best								
			1.02 tt best								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.96							
12.33	18.01	0.10	5.00	0.10							
			Payment	43.05							
12.33	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.15	2.01	0.10	5.00	0.10							
			Stock Level	4.03							
5.15	2.01	0.10	20.00	0.10							
			Order Status	4.01							
10.33	2.01	0.10	5.00	0.10							
			1.02 best								
			1.02 tt best								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.96							
12.33	18.01	0.10	5.00	0.10							
			Payment	43.05							
12.33	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.15	2.01	0.10	5.00	0.10							
			Stock Level	4.03							
5.15	2.01	0.10	20.00	0.10							
			Order Status	4.01							
10.33	2.01	0.10	5.00	0.10							
			1.02 best								
			1.02 tt best								
Key	RT	RT	Menu	Txn		Think					
Time	Delay	Fence	Delay	Weight	Time	Weight	Time				
			New Order	44.96							
12.33	18.01	0.10	5.00	0.10							
			Payment	43.05							
12.33	3.01	0.10	5.00	0.10							
			Delivery	4.01							
5.15	2.01	0.10	5.00	0.10							
			Stock Level	4.03	</						

Key	RT	RT	Menu	Order Status		4.04	Txn	Think	Weight	Time
				0.10	5.00	0.10				
80.40	2.01									
				8.5						
				8.5 tt						
							Txn	Think		
Key	RT	RT	Menu				Weight	Time		
Time	Delay	Fence	Delay							
				New Order		44.83				
102.43	18.01	0.10	5.00	0.10						
				Payment		43.05				
192.43	3.01	0.10	5.00	0.10						
				Delivery		4.04				
42.92	2.01	0.10	5.00	0.10						
				Stock Level		4.04				
42.92	2.01	0.10	20.00	0.10						
				Order Status		4.04				
85.42	2.01	0.10	5.00	0.10						
				9.0						
				9.0 tt			Txn	Think		
Key	RT	RT	Menu				Weight	Time		
Time	Delay	Fence	Delay							
				New Order		44.83				
108.45	18.01	0.10	5.00	0.10						
				Payment		43.05				
108.45	3.01	0.10	5.00	0.10						
				Delivery		4.04				
45.45	2.01	0.10	5.00	0.10						
				Stock Level		4.04				
45.45	2.01	0.10	20.00	0.10						
				Order Status		4.04				
90.45	2.01	0.10	5.00	0.10						
				9.5						
				9.5 tt			Txn	Think		
Key	RT	RT	Menu				Weight	Time		
Time	Delay	Fence	Delay							
				New Order		44.83				
114.47	18.01	0.10	5.00	0.10						
				Payment		43.05				
114.47	3.01	0.10	5.00	0.10						
				Delivery		4.04				
47.98	2.01	0.10	5.00	0.10						
				Stock Level		4.04				
47.98	2.01	0.10	20.00	0.10						
				Order Status		4.04				
95.47	2.01	0.10	5.00	0.10						
				10						
				10 tt			Txn	Think		
Key	RT	RT	Menu				Weight	Time		
Time	Delay	Fence	Delay							
				New Order		44.83				
120.50	18.01	0.10	5.00	0.10						
				Payment		43.05				
120.50	3.01	0.10	5.00	0.10						
				Delivery		4.04				
50.50	2.01	0.10	5.00	0.10						
				Stock Level		4.04				
50.50	2.01	0.10	20.00	0.10						
				Order Status		4.04				
100.50	2.01	0.10	5.00	0.10						
				1.02 better						
				1.02 more aggressive			Txn	Think		
Key	RT	RT	Menu				Weight	Time		
Time	Delay	Fence	Delay							
				New Order		44.92				
12.05	18.01	0.10	5.00	0.10						
				Payment		43.01				
12.05	3.01	0.10	5.00	0.10						
				Delivery		4.02				
5.05	2.01	0.10	5.00	0.10						
				Stock Level		4.03				
5.05	2.01	0.10	20.00	0.10						
				Order Status		4.03				
10.05	2.01	0.10	5.00	0.10						
				1.01 better						
				1.01 more aggressive			Txn	Think		
Key	RT	RT	Menu				Weight	Time		
Time	Delay	Fence	Delay							
				New Order		44.92				
12.09	18.01	0.10	5.00	0.10						
				Payment		43.05				
12.09	3.01	0.10	5.00	0.10						
				Delivery		4.01				
5.07	2.01	0.10	5.00	0.10						
				Stock Level		4.03				
5.07	2.01	0.10	20.00	0.10						
				Order Status		4.01				
10.08	2.01	0.10	5.00	0.10						
				ExtraKick						
				FullSpeedKick			Txn	Think		
Key	RT	RT	Menu				Weight	Time		
Time	Delay	Fence	Delay							
				New Order		44.92				
12.03	18.01	0.10	5.00	0.10						
				Payment		43.01				
12.03	3.01	0.10	5.00	0.10						
				Delivery		4.02				
5.03	2.01	0.10	5.00	0.10						
				Stock Level		4.02				
5.03	2.01	0.10	20.00	0.10						
				Order Status		4.03				
10.03	2.01	0.10	5.00	0.10						

HP Specific Drivers

The following Microsoft Windows 2003 Server device drivers were replaced with HP-specific device drivers:
The Microsoft HP Smart Array P800/512MB SAS Controller default device driver (hpqcisss.SYS) was replaced with the HP Smart Array P800/512MB SAS Controller Non-miniport Performance Drivers for Microsoft Windows 2003 Server (hpqciissb.sys and hpqciissd.sys).

Appendix D: 60-Day Space

TPC-C 60 Day Space Requirements						
Warehouses	20,800			TpmC	262,989	
Table	Rows	Data KB	Index KB	Extra 5% KB	8hr Space	Total Space KB
Warehouse	20,800	2,224	96	116		2,436
District	208,000	23,112	128	1,162		24,402
Customer	624,000,000	453,818,184	28,315,216	24,106,670		506,240,070
History	624,000,000	36,437,960	136,152		8,006,817	36,574,112
New_order	187,200,000	3,335,416	8,432	167,192		3,511,040
Orders	624,000,000	20,375,512	46,464		9,913,017	20,421,976
Order_line	6,239,983,884	409,179,272	963,752		152,648,640	410,143,024
Item	100,000	9,416	112	476		10,004
Stock	2,080,000,000	665,600,008	1,403,560	33,350,178		700,353,746
Total		1,588,781,104	30,873,912	57,625,795	170,568,473	1,677,280,811
		MB				
Dynamic Space	455,071	Sum of Data for Order, Orderline and History				
Static Space	1,182,899	Sum of Data+Index+5%-Dynamic Space				
Free Space	na	Total Allocated Spac - (Dynamic + Static Space)				
Daily Growth	92,061	(Dynamic Space/(W*62.5))*tpmc				
Daily Spread	-	(Free Space -1.5*Daily Growth) Zero Assumed				
60 Day Space MB	6,706,530					
60 Day Space GB	6,549.35	GB				
Log Size	839,600.00	MB				
KB Per New Order	6.52	KB				
8 hr log MB	803,489	MB				
8 hr log GB	784.66	GB				
Space Usage	GB Needed	Disks Measured	GB Priced	Disk Size	Formatted Size	
60 Day Space DB	6,549	528	17,846.40	36GB	33.80	
			0.00			
			0.00			
Total DB			17,846.40			
8-hr log + mirror	1,569	24	1,622.40	72GB	67.60	
OS, Swap	3	2	67.60			
Total Storage	8,121.66	GB	19,536.40	GB		

MSSQL_cs_fg	MSSQL_misc_fg
	2,436
	24,402
506,240,070	44,580,929
	3,511,040
	30,334,993
	562,791,664
	10,004
700,353,746	
	1,206,593,816
	641,255,468
files=	11
size=	14,912,000
Total=	7,360,000
8K blocks	1,312,256,000
OK	647,680,000
OK	OK

tpmC	262,989									
	Data Before KB	Index Before KB	Data After KB	Index After KB	Data Grow KB	Index Grow KB	Total Grow KB	KB/New- Order	8-Hr Growth KB	8-Hr Growth MB
History	36,437,960	136,152	40,342,168	273,576	3,904,208	137,424	4,041,632	0.0634	8,006,816.63	7,819.16
Order	20,375,512	46,464	25,333,592	92,216	4,958,080	45,752	5,003,832	0.0785	9,913,016.65	9,680.68
Order-Line	409,179,272	963,752	485,267,096	1,928,976	76,087,824	965,224	77,053,048	1.2092	152,648,639.57	149,070.94
										166,570.77
	sum(*) Before		sum(*) After		Num New-Order					
d_next_o_id	624,208,000		687,927,991		63,719,991					
	Before MB		After MB		Grow MB					
Log	7,990.37		413,570.67		405,580.30					
								KB/New- Order	8-Hr Growth MB	8-Hr Growth GB
								6.5178	803,489.05	784.66
								6,674.2283	bytes	
	839,600	0.95168829	49.25806							
Database tpcc log used (%)										

Appendix E: Third Party Quotes

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>



September 18, 2006

Hewlett-Packard Company
David Adams
20555 SH 249
Houston, TX 77070

Mr. Adams:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-03150	SQL Server 2005 Enterprise Edition (x64) <i>Per Processor License</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 4% discount from the retail unit price of \$24,999.</i>	\$23,911	4	\$95,644
P72-00274	Windows Server 2003 Enterprise (x64) Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: No Level</i> <i>Unit Price reflects a 41% discount from the retail unit price of \$3,999.</i>	\$2,334	1	\$2,334
P73-00295	Windows Server 2003, Standard Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: No Level</i> <i>Unit Price reflects a 28% discount from the retail unit price of \$999.</i>	\$719	8	\$5,752
254-00170	Visual C++ Standard Edition <i>No Discounts Applied</i>	\$109	1	\$109
N/A	Microsoft Problem Resolution Services <i>Professional Support (1 Incident)</i>	\$245	1	\$245

All products are currently orderable through Microsoft's normal distribution channels. A list of these distribution channels can be found at
<http://www.microsoft.com/products/info/render.aspx?type=mnp&content=22%2flicensing&View=22>.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PCDaAd0618058236.

Please include this Reference ID in any correspondence regarding this price quote.

10 Ft Cat 5E Patch Cable - UTP-4P5E-10 - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address: http://www.lanshack.com/10-Ft-Cat-5E-Patch-Cable-P315C2.aspx

Google Go Network Patch Cables Bookmarks 7 blocked Check AutoLink AutoFill Send to 10 foot Cat5E Non Booted » Settings »

LANshack.com™
CABLING & CONNECTIVITY SUPERSTORE
Division of Atcom Inc.


SITE MAP Today is Monday, September 18, 2006

LOG IN REGISTER ORDER STATUS PURCHASING HELP

PRODUCTS

- Fiber Optic Cable, Hardware, etc.
- Patch Cables
 - Cat 5E & 6 (UTP/STP)
 - Cat 5E/6 Data & Voice Hardware & Bulk Cable
 - Tools & Testers
 - Technician's Tool Cases & Carts
 - Rip-Tie Cable Ties
 - Racks, Brackets & Metal Products
 - Cisco Router Cables
 - Network Equipment
 - Labeling Tools & Acc.
 - Hi-Tech Home
- Search

10 Ft Cat 5E Patch Cable

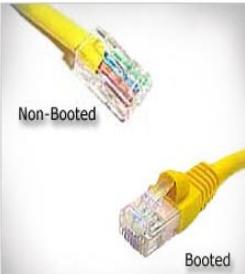

CAT5E STOCK

Category 5E patch cords are available in 7 brilliant colors. The cable has stranded conductors for greater flexibility. All patch cords are 100% tested for performance and continuity in accordance with industry standards. If you are looking for more choices in length, color, boot options, etc. then please look at our Custom Category 5E Patch Cables.

[Information About Boots](#)

NOTE: To enhance availability and potentially expedite the shipment of your order, there is an option to allow us to substitute the cable color (recommended for small orders or where color is not important).

Quantity Discounts: (discounted at checkout)

25-49 pieces @ 10% off
50-75 pieces @ 15% off
75-99 pieces @ 20% off
100-999 pieces @ 25% off
1000 or more @ 35% off

Availability: Usually ships within 24 hours.

Urgent Orders: [Read Information](#)

Choose Options

Boot Option: Non-Booted

Color: Gray

Expedite Availability: No color substitution

Quantity: 1

Related Products



6 Inch by 1/2 wide Rip-Tie Lite Cable Ties - Roll of 25 pieces

6 Inch by 1/2 wide Rip-Tie Lite Cable Ties - 10 Rolls of 10 pieces

8 Inch by 1/2 wide Rip-Tie Lite Cable Ties - Roll of 25 pieces

12 Inch by 1/2 wide Rip-Tie Lite Cable Ties - Roll of 25 pieces

Appendix F: Price Verification

Description	Part Number	Order Date	Order Method	Price Verification
HP Smart Array P800/512MB SAS Controller	381513-B21	11/22/2006	Note 1	Note 2
HP Smart Array E500/256 SAS Controller	435129-B21	3/26/2006	Note 1	Note 2
HP StorageWorks MSA-60 Storage	418408-B21	11/22/2006	Note 1	Note 2
HP StorageWorks MSA-60 Storage (10% Spares)	418408-B21	11/22/2006	Note 1	Note 2
8GB PC2-5300 2 x 4GB Kit	408854-B21	11/13/2006	Note 1	Note 2
Note 1 = HP Direct : 800-203-6748.				
Note 2 = These components are not immediately orderable. For price verification before order date: e-mail hp.pricing.desk@hp.com				