



Hewlett-Packard Company

TPC Benchmark™ C
Full Disclosure Report
for
ProLiant ML350 G3T
using
Microsoft SQL Server 2000 Enterprise Edition
and
Windows Server 2003 Enterprise Edition

First Edition
May 2003

First Edition – May 2003

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2003 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2003

HP, NonStop, ProLiant ML350G3T, and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows Server 2003 and SQL Server 2000 are registered trademarks of Microsoft Corporation.

Pentium III is a registered trademark of Intel.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Table of Contents

TABLE OF CONTENTS.....	III
PREFACE.....	V
TPC BENCHMARK C OVERVIEW	V
ABSTRACT	VI
OVERVIEW	VI
TPC BENCHMARK C METRICS.....	VI
STANDARD AND EXECUTIVE SUMMARY STATEMENTS.....	VI
AUDITOR.....	VI
GENERAL ITEMS.....	10
TEST SPONSOR.....	10
APPLICATION CODE AND DEFINITION STATEMENTS	10
PARAMETER SETTINGS.....	10
CONFIGURATION ITEMS	10
CLAUSE 1 RELATED ITEMS	13
TABLE DEFINITIONS.....	13
PHYSICAL ORGANIZATION OF DATABASE.....	13
<i>Benchmarked Configuration:</i>	13
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:.....	14
INSERT AND DELETE OPERATIONS	14
PARTITIONING.....	14
REPLICATION, DUPLICATION OR ADDITIONS	14
CLAUSE 2 RELATED ITEMS	15
RANDOM NUMBER GENERATION	15
INPUT/OUTPUT SCREEN LAYOUT	15
PRICED TERMINAL FEATURE VERIFICATION	15
PRESENTATION MANAGER OR INTELLIGENT TERMINAL	15
TRANSACTION STATISTICS.....	15
QUEUEING MECHANISM.....	16
CLAUSE 3 RELATED ITEMS	17
TRANSACTION SYSTEM PROPERTIES (ACID).....	17
ATOMICITY	17
<i>Completed Transactions</i>	17
<i>Aborted Transactions</i>	17
CONSISTENCY	17
ISOLATION	17
DURABILITY.....	18
<i>Durable Media Failure</i>	18
<i>Instantaneous Interruption and Loss of Memory</i>	18
CLAUSE 4 RELATED ITEMS	20
INITIAL CARDINALITY OF TABLES	20
DATABASE LAYOUT.....	20
TYPE OF DATABASE.....	20
DATABASE MAPPING	21
60 DAY SPACE	21
CLAUSE 5 RELATED ITEMS	22

THROUGHPUT.....	22
KEYING AND THINK TIMES	22
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS	23
STEADY STATE DETERMINATION.....	28
WORK PERFORMED DURING STEADY STATE	28
MEASUREMENT PERIOD DURATION.....	28
REGULATION OF TRANSACTION MIX	29
TRANSACTION STATISTICS.....	29
CHECKPOINT COUNT AND LOCATION	30
CHECKPOINT DURATION.....	30
CLAUSE 6 RELATED ITEMS	31
RTE DESCRIPTIONS	31
EMULATED COMPONENTS.....	31
FUNCTIONAL DIAGRAMS	31
NETWORKS	31
OPERATOR INTERVENTION.....	31
CLAUSE 7 RELATED ITEMS	32
SYSTEM PRICING.....	32
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE.....	32
COUNTRY SPECIFIC PRICING	32
USAGE PRICING	32
CLAUSE 9 RELATED ITEMS	33
AUDITOR'S REPORT	33
AVAILABILITY OF THE FULL DISCLOSURE REPORT	33

Preface

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.1, released February 11, 2003.

TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant ML350G3T. The operating system used for the benchmark was Windows Server 2003 Enterprise Edition. The DBMS used was Microsoft SQL Server 2000 Enterprise Edition.

TPC Benchmark C Metrics

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

39006.54 tpmC
\$4.72 per tpmC

The availability date is May 12, 2003.


Standard and Executive Summary Statements

The following pages contain executive summary of results for this benchmark.

Auditor

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

Hewlett-Packard Company		ProLiant ML530 G3T 2P c/s with 2 ProLiant DL360 G2		TPC-C Rev. 5.1
				Report Date: May 12, 2003
Total System Cost		TPC-C Throughput	Price/Performance	Availability Date
\$187,141		39,006.54	\$4.72	May 12, 2003
Processors	Database Manager	Operating System	Other Software	Number of Users
2 Intel Xeon 2.8GHz – Server 2 Intel Xeon 2.4GHz – Client	Microsoft SQL Server 2000 Enterprise Edition (SP3)	Microsoft Windows Server 2003, Enterprise Edition	Microsoft Visual C++ Microsoft COM+	32800

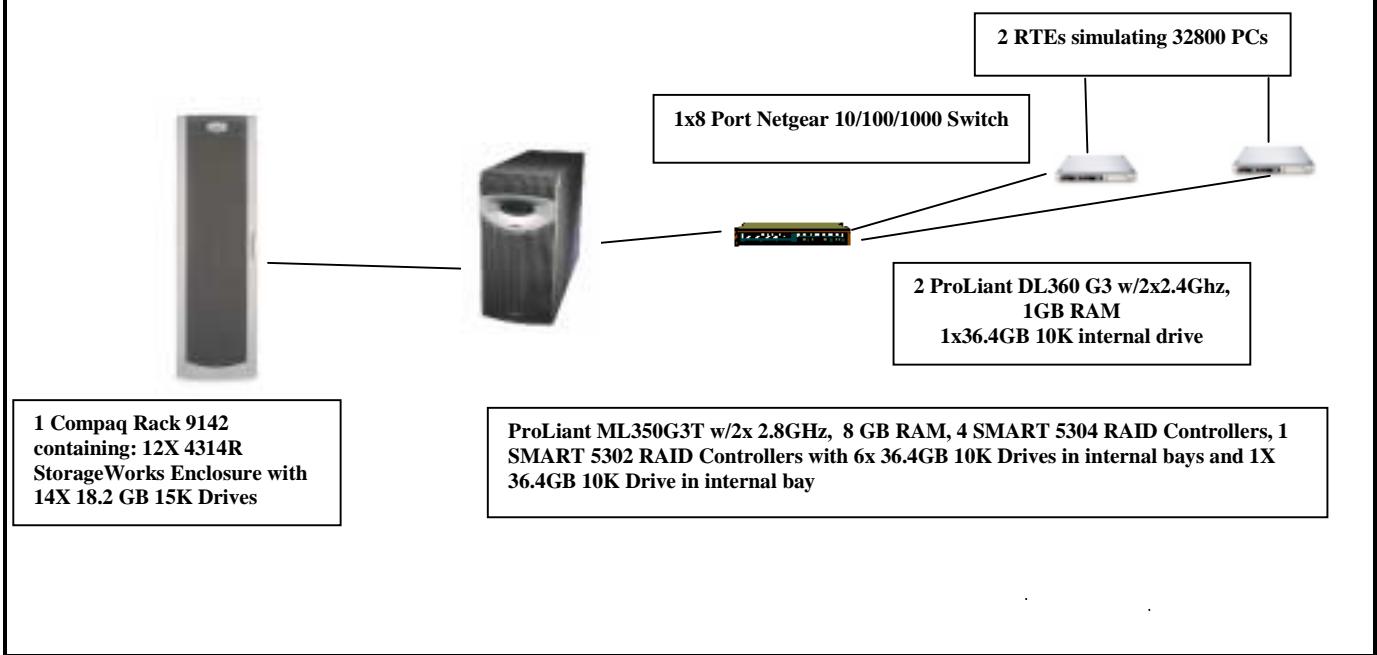

		Server	Each Client
System Components	Quantity	Description	Quantity
Processor	2	2.8 GHz Intel Xeon w/ 512K Cache	2
Memory	2	4 GB REG (2x2GB)	2
Disk Controllers	1	Integrated Ultra-3 SCSI Controller	1
	1	SMART 5302 Array Controller	
	4	SMART 5304 Array Controller	
Disk Drives	168	18.2 GB SCSI Drive	1
	6	36.4 GB SCSI Drive	
Total Storage		3276.0 GB	
Tape Drives	1	12/24 GB DAT	36.4 GB

Hewlett-Packard Company	ProLiant ML350-G3T-2.8-2P			TPC-C Rev. 5.1		
	Client/Server			Report Date:	12-May-03	
Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price
Server Hardware						
ProLiant ML350T 1P 2.8GHz, 256MB, Integrated Gigabit NIC	311523-001		1,759	1	1,759	
2.8GHz Processor Option Kit	314763-B21		999	1	999	
4G Reg PC2100 (2 x 2Gb)	300682-B21		11404	2	22,808	
2-Bay Hot Plug Wide Ultra2/Ultra3 SCSI Drive Cage	244059-B21		370	1	370	
S5500 15 carbon / silver monitor	261602-001		149	1	149	
Scroll Mouse-Carbon	231947-B21		5	1	5	
PS/2 Easy Access Internet Keyboard	265977-001		12	1	12	
StorageWorks Enclosure Model 4314R - Rack-mountable	190209-001		2,955	12	35,460	
Rack Model 9142 (42U - Opal) - Flat Pallet	120663-B21		1,321	2	2,642	
Side Panel Kit - 9142 Rack	120670-B21		207	1	207	
Smart Array 5302/32 Controller	166207-B21		1,270	1	1,270	
Smart Array 5304/128 Controller	158939-B21		2,052	4	8,208	
12/24-Gigabyte DAT Drive (Internal)	295513-B22		682	1	682	
UPS T700	204015-001		325	1	325	
18.2GB 15Krpm U320 UNI HDD	286775-B22		399	168	67,032	
18.2GB 15Krpm U320 UNI HDD (10% spares)	286775-B22		399	17		6,783
36.4GB 10Krpm U320 UNI HDD (internal OS drive)	286713-B22		339	1	339	
36.4GB 10Krpm U320 UNI HDD (internal Log Drives)	286713-B22		339	6	2,034	
CarePac Service - 300 Series Servers 3Yr,7x24,4hr	162657-002		1,450	1		1,450
FM-4E724-36 3YR 24X7/4HR EMPTY DISK ENCL	171242-002		157	12		1,884
				Subtotal	144,301	10,117
Server Software						
Database Server Support Package (1 year)	P-RORS-16U-01	Microsoft	1,950	3		5,850
SQL Server 2000 Enterprise Edition(per processor)	810-00845	Microsoft	17,279	2	34,558	Incl Above
Visual C++ Standard	254-00170	Microsoft	109	1	109	Incl Above
Windows Server 2003, Enterprise Edition	P72-00264	Microsoft	2,399	1	2,399	Incl Above
				Subtotal	37,066	5,850
Client Hardware						
ProLiant DL360 G3 2.4GHz	292887-001		2,599	2	5,198	
Two Integrated Gigabit NIC, Integrated Smart Array Controller						
2.4GHz Xeon Processor Option Kit - DL360G3	292891-B21		729	2	1,458	
512MB PC2100 DDR (2x256MB)	300678-B21		326	2	652	
S5500 15 carbon / silver monitor	261602-001		149	2	298	
Scroll Mouse-Carbon	231947-B21		5	2	10	
PS/2 Easy Access Internet Keyboard	265977-001		12	2	24	
36.4GB 10Krpm U320 UNI HDD (internal OS drive)	286713-B22		339	2	678	
FM-EL724-36 3YR 24X7 4HR ENTRY 300 SVR	162675-002		750	2		1,500
				Subtotal	8,318	1,500
Client Software						
Windows 2000 Server	C11-00821	Microsoft	738	2	1,476	Incl. Above
				Subtotal	1,476	0
User Connectivity						
Netgear GS508TNA 8 port Copper Gigabit Switch	N/A CompuPlus	3	502	3	1,506	
				Subtotal	1,506	0
Large Purchase and Net 30 discount (See Note 1)	16.0%		1		(\$24,419)	(\$1,859)
				Total	\$168,248	\$15,608
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.	*					
					Three-Year Cost of Ownership:	\$183,856
					tpmC Rating:	39006.54
					\$ / tpmC:	\$4.72
Pricing: 1=HP 2= Microsoft 3=Compuplus.com						
Note 1 = Discount based on HP Direct guidance with large purchase and Net 30 discount.						
Note: The benchmark results and test methodology were audited by Lorna Livingtree of Performance Metrics, Inc.						

Numerical Quantities Summary			
MQTH, Computed Maximum Qualified Throughput	39006.54 tpmC		
Response Times (in seconds)	Average	90%	Maximum
New-Order	0.98	1.54	8.07
Payment	0.88	1.44	7.01
Order-Status	0.90	1.46	6.44
Delivery (interactive portion)	0.10	0.11	0.76
Delivery (deferred portion)	0.26	0.43	1.13
Stock-Level	1.96	2.61	6.93
Menu	0.10	0.11	0.96
Transaction Mix, in percent of total transaction			
New-Order			44.88%
Payment			43.03%
Order-Status			4.03%
Delivery			4.03%
Stock-Level			4.03%
Emulation Delay (in seconds)	Resp.Time	Menu	
New-Order	0.10	0.10	
Payment	0.10	0.10	
Order-Status	0.10	0.10	
Delivery (interactive)	0.10	0.10	
Stock-Level	0.10	0.10	
Keying/Think Times (in seconds)	Min.	Average	Max.
New-Order	18.00/0.00	18.02/12.65	18.04/126.50
Payment	3.00/0.00	3.02/12.65	3.04/126.50
Order-Status	2.00/0.00	2.02/10.54	2.04/105.50
Delivery (interactive)	2.00/0.00	2.02/5.31	2.04/53.00
Stock-Level	2.00/0.00	2.02/5.30	2.04/53.00
Test Duration			
Ramp-up time			112 minutes
Measurement interval			120 minutes
Transactions (all types) completed during measurement interval			10,849,691
Ramp down time			17 minutes
Checkpointing			
Number of checkpoints			4
Checkpoint interval			30 minutes

General Items

Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

Application Code and Definition Statements

The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.

Appendix A contains all source code implemented in this benchmark.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

This requirement can be satisfied by providing a full list of all parameters.

Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagrams for both the tested and priced systems are included on the following pages.

Figure 1. Benchmarked Configuration


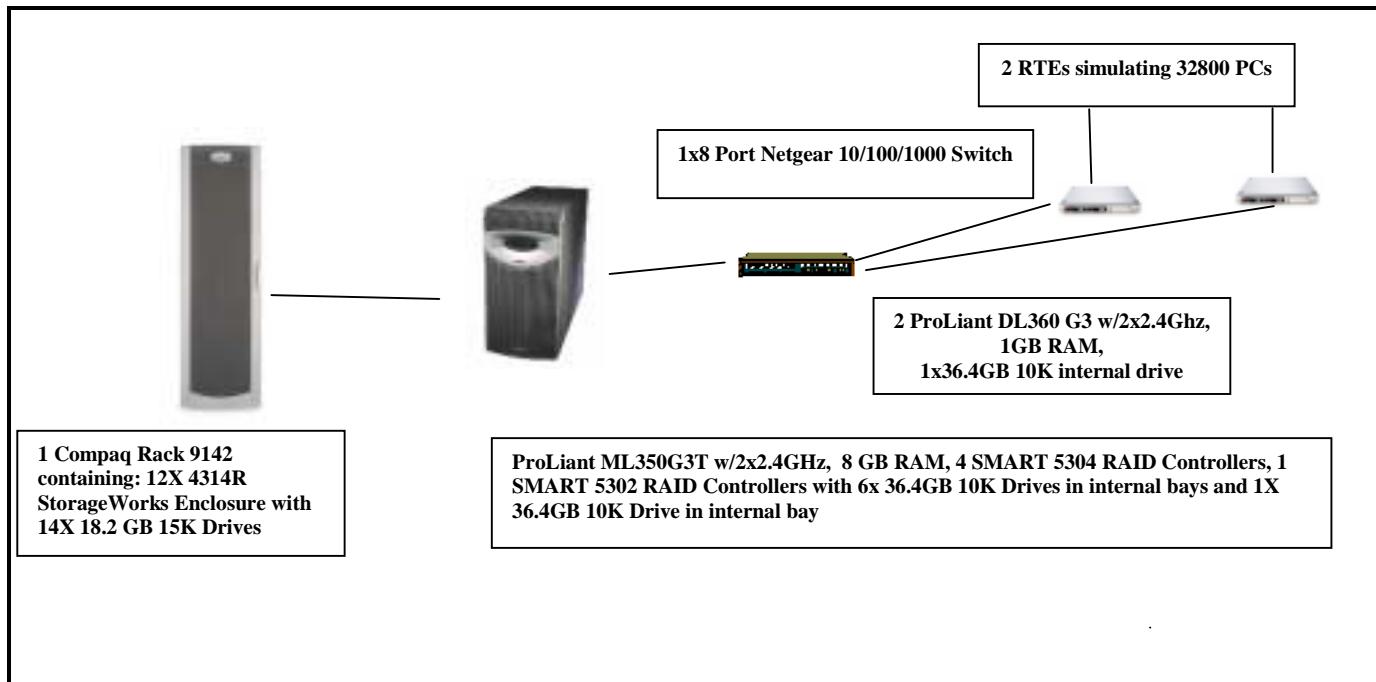


Figure 2. Priced Configuration

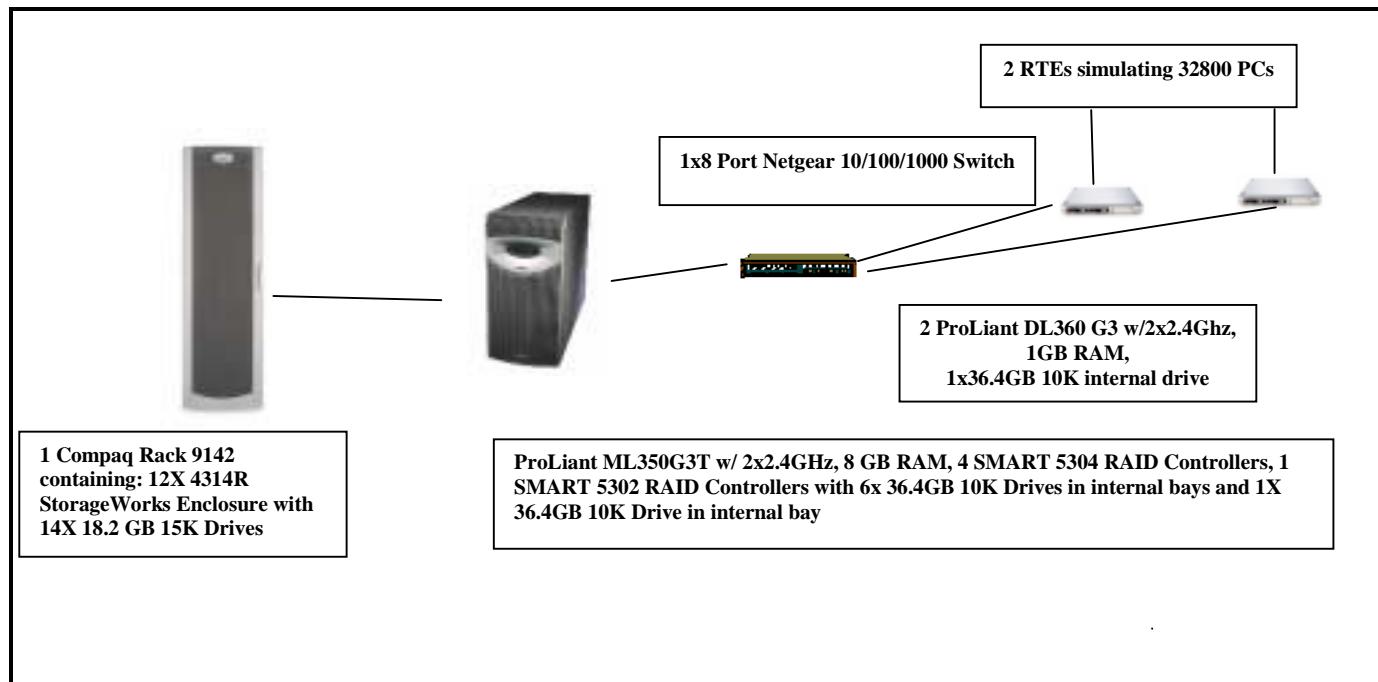

Clause 1 Related Items

Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of: 168 18.2GB 15K drives for the database data, 1 18.2GB 10K drives for the operating system, and 6 36.4GB 10K drives for the transaction log. Forty two drives (18.2GB 15K) were connected to each of the controllers in slots 2-5 and the six drives (36.4GB 10K) were connected to the controller in slot 1.

Benchmarked Configuration:

Integrated SCSI Controller

LOGICAL DRIVE C:	Total Capacity = 33.90 GB
	Microsoft Server 2003 Enterprise Edition, MSSQL_tpcc_root.mdf

SMART-5302 Controller, Slot 1, Array A

<u>LOGICAL DRIVE E:</u> MSSQL_tpcc_log	<u>Total Capacity = 101.74 GB</u>	<u>RAID 0+1</u>
---	-----------------------------------	-----------------

SMART-5304 Controller, Slot 2, Array A

<u>LOGICAL DRIVE F:</u> MSSQL_cs0	<u>Total Capacity = 47.95 GB</u>	<u>RAID 0</u>
--------------------------------------	----------------------------------	---------------

SMART-5304 Controller, Slot 2, Array A

<u>LOGICAL DRIVE G:</u> MSSQL_misc0	<u>Total Capacity = 23.26 GB</u>	<u>RAID 0</u>
--	----------------------------------	---------------

SMART-5304 Controller, Slot 2, Array A

<u>LOGICAL DRIVE W:</u> Tpccbackup1	<u>Total Capacity = 320.51 GB</u>	<u>RAID 0+1</u>
--	-----------------------------------	-----------------

SMART-5304 Controller, Slot 3, Array A

<u>LOGICAL DRIVE H:</u> MSSQL_cs1	<u>Total Capacity = 47.95 GB</u>	<u>RAID 0</u>
--------------------------------------	----------------------------------	---------------

SMART-5304 Controller, Slot 3, Array A

<u>LOGICAL DRIVE I:</u> MSSQL_misc1	<u>Total Capacity = 23.26 GB</u>	<u>RAID 0</u>
--	----------------------------------	---------------

SMART-5304 Controller, Slot 3, Array A

<u>LOGICAL DRIVE X:</u> Tpccback2	<u>Total Capacity = 320.51 GB</u>	<u>RAID 0+1</u>
--------------------------------------	-----------------------------------	-----------------

SMART-5304 Controller, Slot 4, Array A

<u>LOGICAL DRIVE J:</u> MSSQL_ cs2	<u>Total Capacity = 47.95 GB</u>	<u>RAID 0</u>
---------------------------------------	----------------------------------	---------------

SMART-5304 Controller, Slot 4, Array A

<u>LOGICAL DRIVE K:</u> MSSQL_misc2	<u>Total Capacity = 23.26 GB</u>	<u>RAID 0</u>
--	----------------------------------	---------------

SMART-5304 Controller, Slot 4, Array A

<u>LOGICAL DRIVE Y:</u>	<u>Total Capacity = 320.51 GB</u>	<u>RAID 0+1</u>
Tpccbackup3		
SMART-5304 Controller, Slot 5, Array A		
<u>LOGICAL DRIVE L:</u>	<u>Total Capacity = 47.95 GB</u>	<u>RAID 0</u>
MSSQL_cs3		
SMART-5304 Controller, Slot 5, Array A		
<u>LOGICAL DRIVE M:</u>	<u>Total Capacity = 23.26 GB</u>	<u>RAID 0</u>
MSSQL_misc3		
SMART-5304 Controller, Slot 5, Array A		
<u>LOGICAL DRIVE Z:</u>	<u>Total Capacity = 320.51 GB</u>	<u>RAID 0+1</u>
Tpccbackup4		

Priced Configuration vs. Measured Configuration:

The measured and priced configuration differ in that the measured configuration used disk drives for database backup and the priced configuration used a DAT drive for backup.

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.

All insert and delete functions were fully operational during the entire benchmark.

Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

No partitioning was used in this benchmark.

Replication, Duplication or Additions

Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.

No replications, duplications or additional attributes were used in this benchmark.

Clause 2 Related Items

Random Number Generation

The method of verification for the random number generation must be described.

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none were found.

Input/Output Screen Layout

The actual layout of the terminal input/output screens must be disclosed.

All screen layouts followed the specifications exactly.

Priced Terminal Feature Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

Presentation Manager or Intelligent Terminal

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.

Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

Table 2.1 Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%

Statistic		Value
	Accessed by last name	60.00%
Order Status	Accessed by last name	60.13%
Transaction Mix	New Order	44.88%
	Payment	43.03%
	Order status	4.03%
	Delivery	4.03%
	Stock level	4.03%

Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

Clause 3 Related Items

Transaction System Properties (ACID)

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

All ACID property tests were successful. The executions are described below.

Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

Consistency

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included a checkpoint.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate that the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

Durable Media Failure

Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed:

- A new database containing 328 warehouses (10% of the warehouses of the full database) was created and was backed up to extra disks.
- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 3280 users.
- The test was allowed to run for a minimum of 10 minutes.
- One log disk was removed from the drive cabinet.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the users status on the RTE.
- One of the data disks was removed from the drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down.
- A dump of the transaction log was taken and the Microsoft SQL Server was shutdown.
- A new log disk was inserted into the log drive cabinet. A new data disk was inserted into the data drive cabinet. After the RAID recovery process finished, the system was rebooted and Microsoft SQL Server was started.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 13 and 14 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Instantaneous Interruption and Loss of Memory

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 3204 warehouses under a full load of 32800 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 32800 users.
- The test was allowed to run for a minimum of 10 minutes.
- A checkpoint was performed.
- The system crash and loss of memory were induced by switching the power off. The power cords were then physically removed from the SUT. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was shutdown.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.

- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 10 and 11 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Clause 4 Related Items

Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

Table 4.1 Number of Rows for Server

Table2	Cardinality as built
Warehouse	3,280
District	32,800
Customer	98,400,000
History	98,400,000
Orders	98,400,000
New Order	29,520,000
Order Line	983,995,558
Stock	328,000,000
Item	100,000
Deleted Warehouses	0

Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 4 SMART-5304 Array controllers with 4 SCSI channels and 1 SMART-5302 Array controller with 2 SCSI channels. Each controller is capable of accessing up to 14 disk drives per channel, and supports RAID 0, RAID 0+1, and RAID 5 per each logical volume configured. The data tables were stored on 4 RAID arrays of (42) 18.2GB 15K drives each. Each of these controllers also housed a RAID 0+1 volume used for backup of the database. A SMART-5302 Array controller had one array consisting of (6) 36.4GB 10K drives with a RAID 0+1 logical volume for the database log. The Array Accelerators on the data controllers were configured as 100% write cache and were enabled for all logical drives on these controllers. The controller for the transaction log had the cache disabled. All RAID volumes used hardware RAID.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the filegroups and tables is included in Appendix B.

Type of Database

A statement must be provided that describes:

- *The data model implemented by DBMS used (e.g. relational, network, hierarchical).*
- *The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/I, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2000 Enterprise Edition is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

Database Mapping

The mapping of database partitions/replications must be explicitly described.

The database was not replicated.

60 Day Space

Details of the 60 day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using *dbcc sqlperf(logspace)*.
- Transactions were run against the database with a full load of users.
- The free space was again queried using *dbcc sqlperf(logspace)*.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the sum(d_next_o_id) taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

The details of both the 8-hour transaction log space requirement and the 60-day space requirement is shown in Appendix D.

Clause 5 Related Items

Throughput

Measured tpmC must be reported

Measured tpmC	39,006.54 tpmC
Price per tpmC	\$4.72 per tpmC

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.

Table 5.2: Response Times

Type	Average	90 th %	Maximum
New-Order	0.98	1.54	8.07
Payment	0.88	1.44	7.01
Order-Status	0.90	1.46	6.44
Interactive Delivery	0.10	0.11	0.76
Deferred Delivery	0.26	0.43	1.13
Stock-Level	1.96	2.61	6.93
Menu	0.10	0.11	0.96

Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 5.3: Keying Times

Type	Minimum	Average	Maximum
New-Order	18.00	18.02	18.04
Payment	3.00	3.02	3.04
Order-Status	2.00	2.02	2.04
Interactive Delivery	2.00	2.02	2.04
Stock-Level	2.00	2.02	2.04

Table 5.4: Think Times

Type	Minimum	Average	Maximum
New-Order	0.00	12.65	126.50
Payment	0.00	12.65	126.50
Order-Status	0.00	10.54	105.50
Interactive Delivery	0.00	5.31	53.00
Stock-Level	0.00	5.30	53.00

Response Time Frequency Distribution Curves and Other Graphs

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.

Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 3. New Order Response Time Distribution

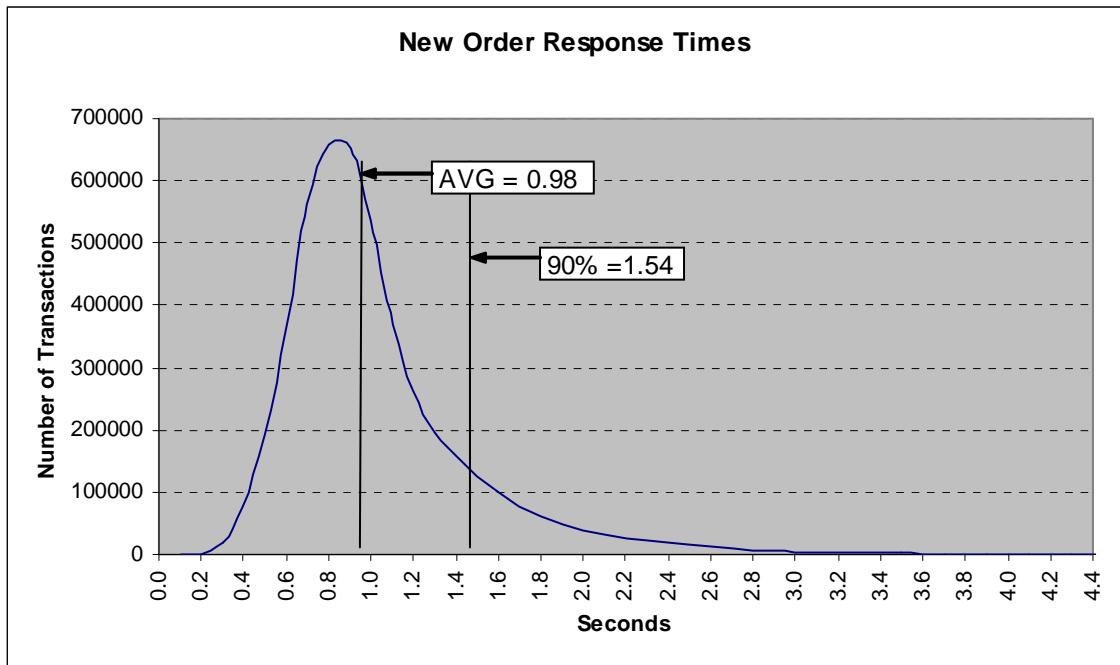


Figure 4. Payment Response Time Distribution

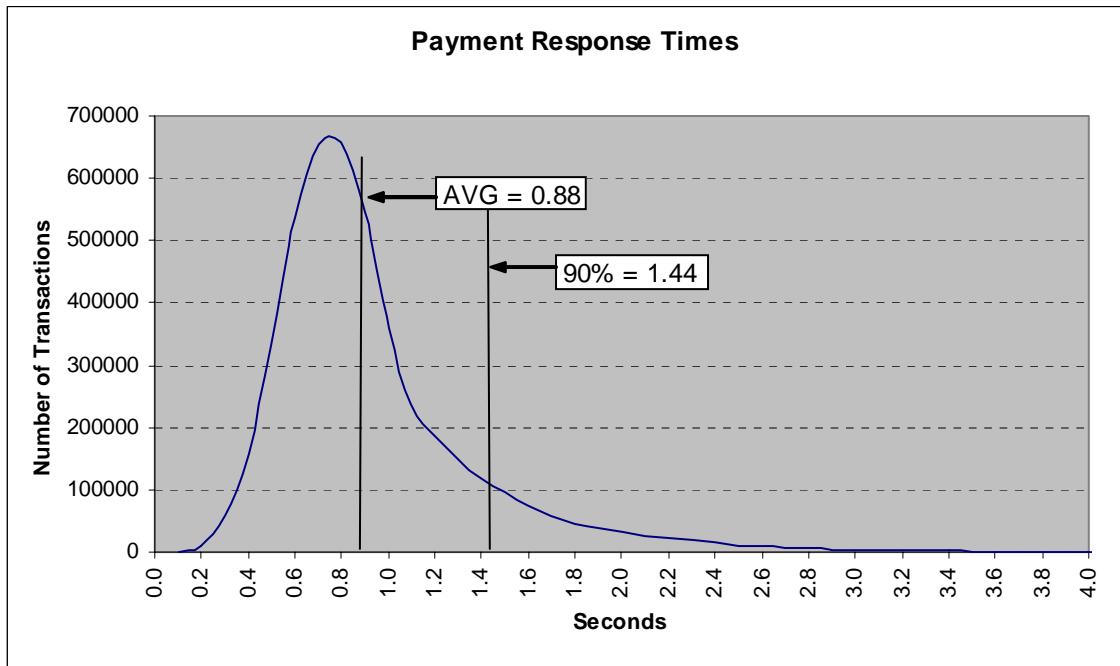


Figure 5. Order Status Response Time Distribution

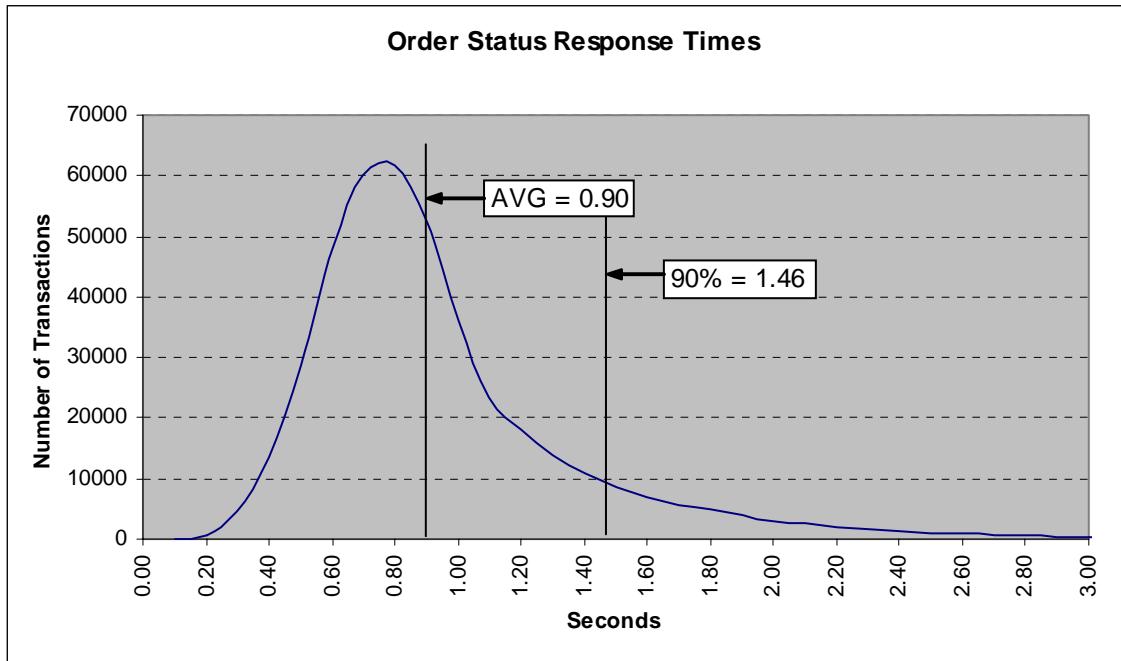


Figure 6. Delivery Response Time Distribution

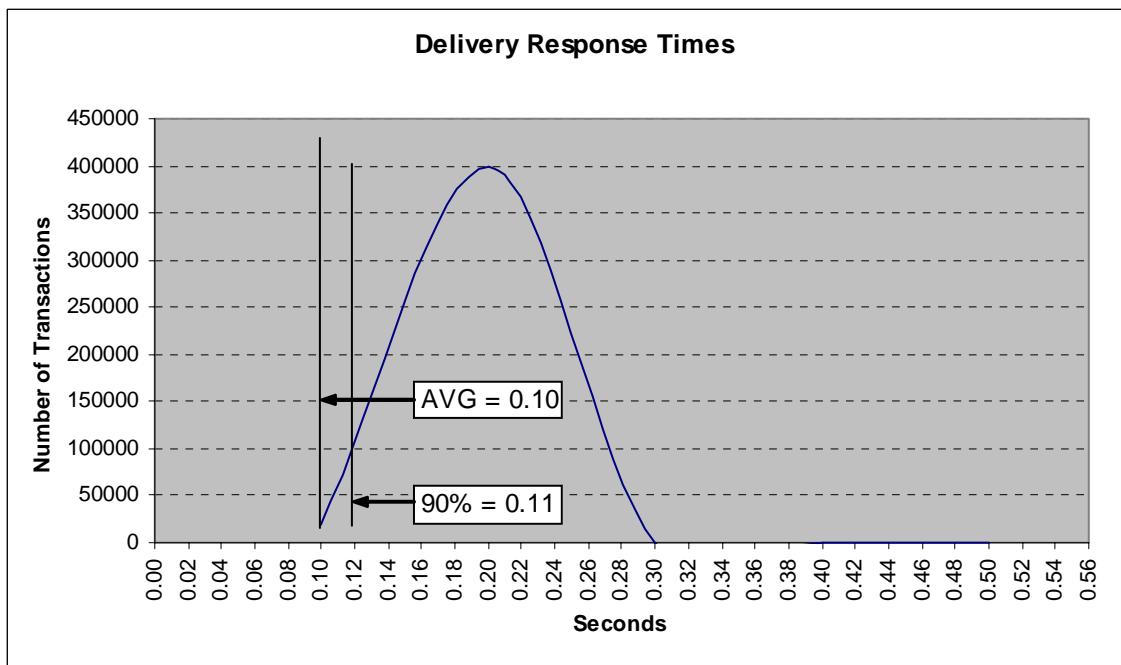


Figure 7. Stock Level Response Time Distribution

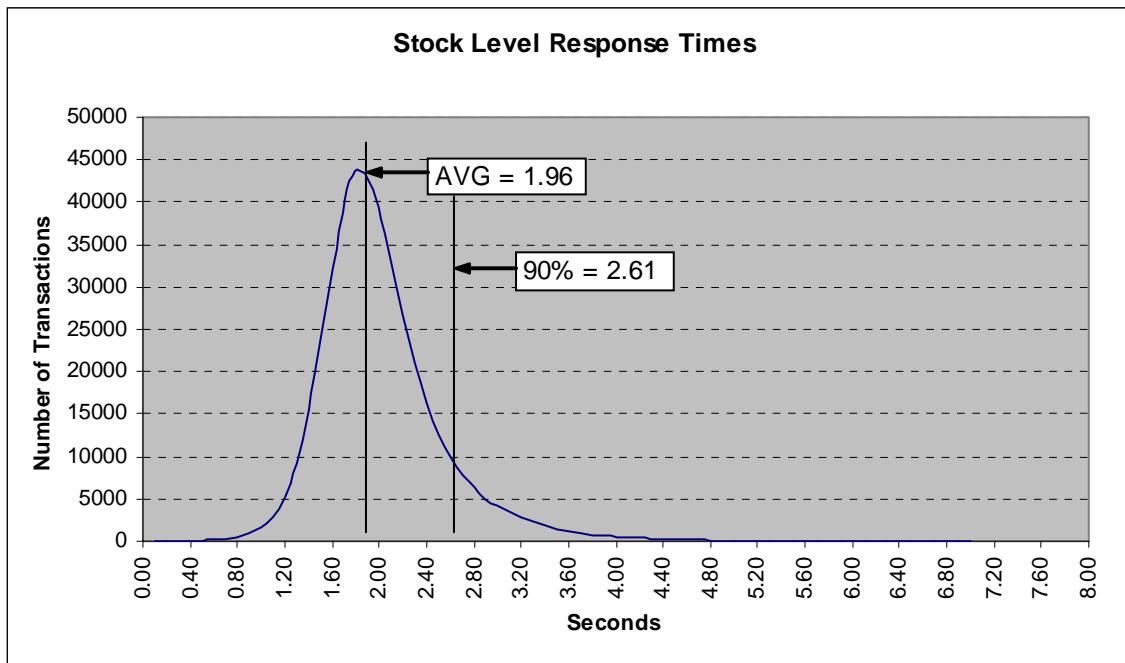


Figure 8. Response Time vs. Throughput

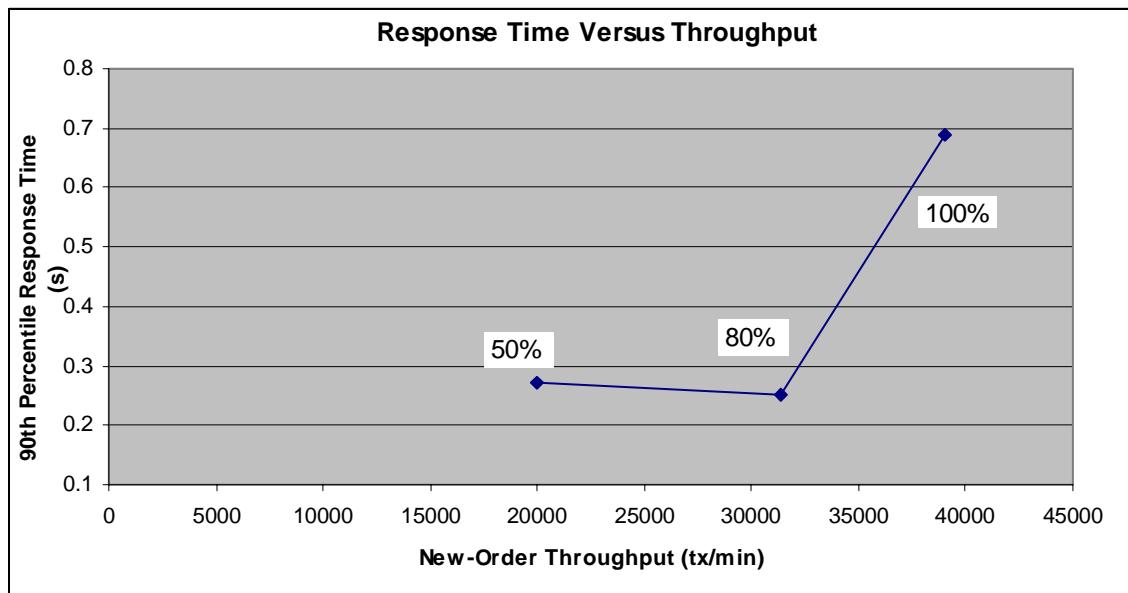


Figure 9. New Order Think Time Distribution


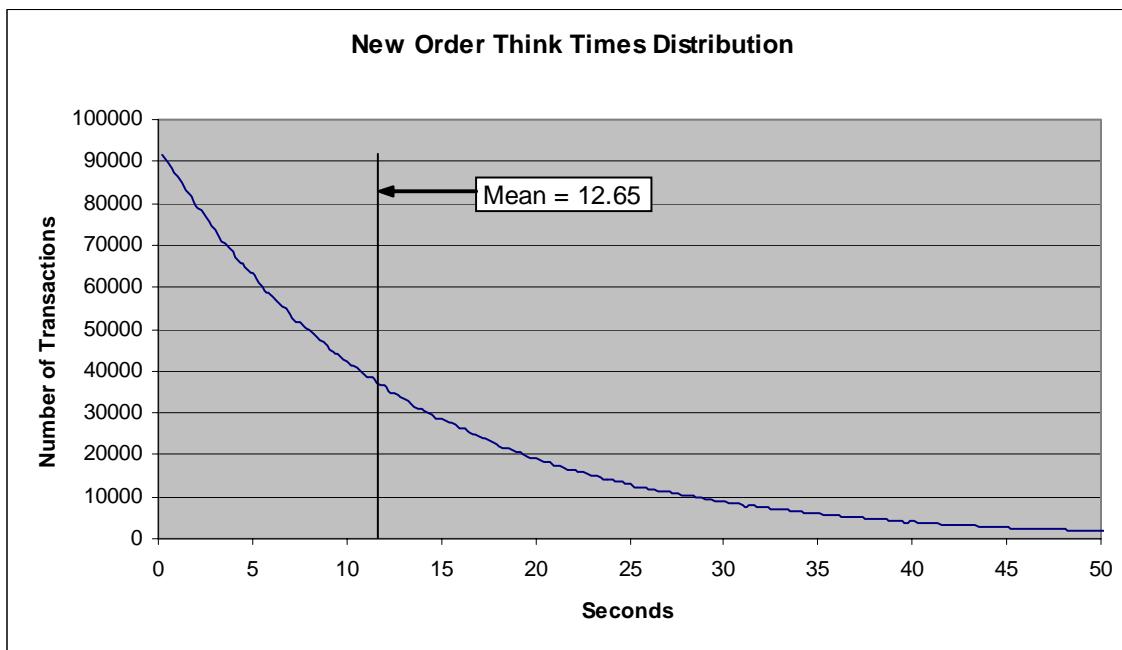


Figure 10. Throughput vs. Time Distribution

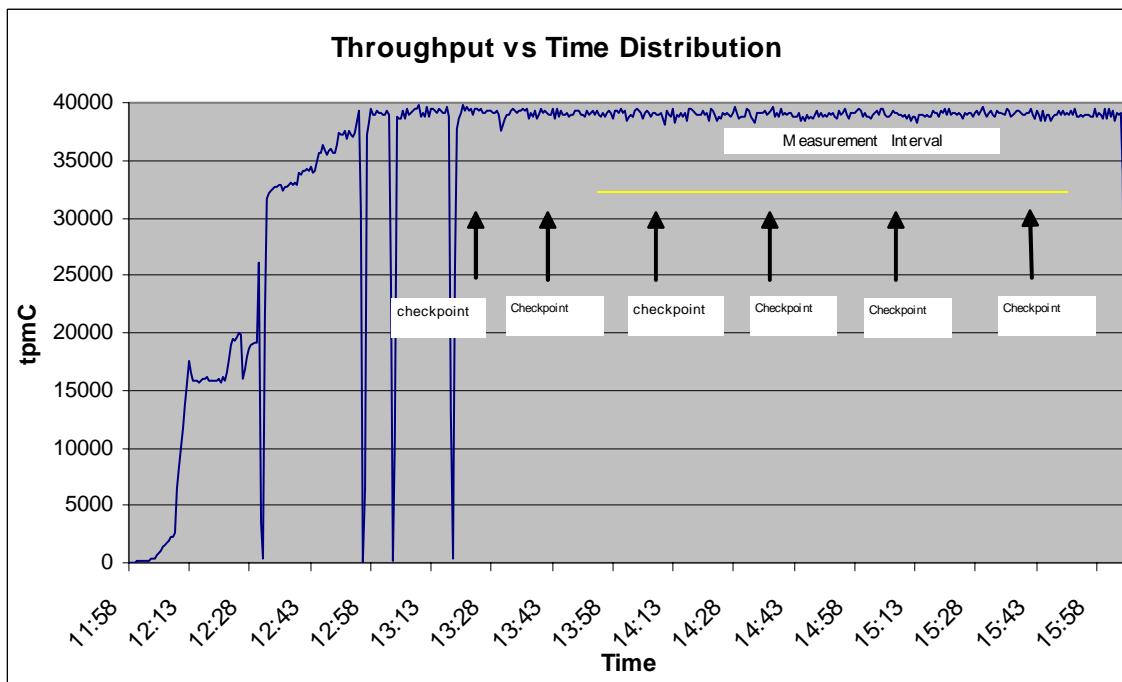

Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The input screen for the requested transaction was returned and timestamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over Ethernet LANs using ODBC and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 120 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes so that the checkpoint interval was an integral multiple of the measurement interval, which was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 10.

Measurement Period Duration

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The reported measured interval was exactly 120 minutes long.

Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution, which was not adjusted during the run.

Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

Table 5.5: Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.00%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	60.10%
Transaction Mix	New Order	44.88%
	Payment	43.03%
	Order status	4.03%
	Delivery	4.03%
	Stock level	4.03%

Checkpoint Count and Location

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

The initial checkpoint was started 103 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. The measurement interval contains four checkpoints.

Checkpoint Duration

The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.

Checkpoint Start Time	Duration
2:10:58 pm	7 minutes, 17 seconds
2:40:56 pm	7 minutes, 32 seconds
3:10:52 pm	7 minutes, 28 seconds
3:40:50 pm	7 minutes, 30 seconds

Clause 6 Related Items

RTE Descriptions

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input are listed in Appendix A.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

The driver system consisted of 2 HP ProLiant server. This driver machine emulated the users web browsers.

Functional Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

Networks

The network configuration of both the tested services and proposed (target) services which are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.

The bandwidth of the networks used in the tested/priced configuration must be disclosed.

In the tested configuration, 2 driver (RTE) machines were connected through a 10/100/1000 switch to the client machines at 1000Mbps, thus providing the path from the RTE to the clients. The server (SUT) was connected to the clients through a 10/100/1000 switch at 1000Mbps.

The priced configuration was connected in the same manner as the tested configuration.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 Related Items

System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

• Maximum Qualified Throughput	39006.54 tpmC
• Price per tpmC	\$4.72 per tpmC
• Availability	May12, 2003

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 1 Microsoft Windows 2000 Server
- 1 Microsoft Windows Server 2003, Enterprise Edition
- 1 Microsoft SQL Server 2000 Enterprise Edition (per processor)
- 1 Microsoft Visual C++
- HP Servers include 3 years of support.

Clause 9 Related Items

Auditor's Report

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.
137 Yankton St., Suite 101
Folsom, CA 95630
(phone) (916) 985-1131
(fax) (916) 985-1185
e-mail: lorna@perfmetrics.com

Availability of the Full Disclosure Report


The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

Transaction Processing Performance Council
c/o Shanley Public Relations
777 North First Street, Suite 600
San Jose, CA 95112-6311

or

Hewlett-Packard Company
Database Performance Engineering
P.O. Box 692000
Houston, TX 77269-2000

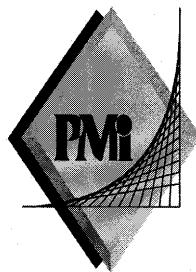

PERFORMANCE METRICS INC.
TPC Certified Auditors

May 6, 2003

Mr. Jim Barrett
Systems Software Engineer
Compaq Computer Corporation
20555 SH 249
Houston, TX 77070

I have verified by remote the TPC Benchmark™ C client/server for the following configuration on each node:

Platform: ProLiant ML350 G3
Database Manager: Microsoft SQL Server 2000 Enterprise Edition
Operating System: Microsoft Windows 2003 Enterprise Edition
Transaction Monitor: Microsoft COM+

Servers: ProLiant ML350 G3 with:				
CPU's	Memory	Disks (total)	90% Response	TpmC
2 Pentium III Xeon @ 2.8 Ghz	Main: 8 GB Cache: 512 KB	168 @ 18GB 6 @ 36GB	1.54 sec	39,006.54
2 Client: ProLiant DL360 G3 with:				
2 Pentium III Xeon @ 2.4 Ghz	Main: 1048 MB Cache: 512 KB	1 @ 36GB	Na	Na

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized and populated.
- The database was properly scaled with 3,280 warehouses, all of which were active during the measured interval.
- The ACID properties were successfully demonstrated.

PERFORMANCE METRICS INC.
TPC Certified Auditors

- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 day space calculation was verified.
- The controller cache was disabled on the log disk controllers.
- The steady state portion of the test was 120 minutes.
- One checkpoint was taken before the measured interval.
- Four checkpoints were taken during the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.

Auditor Notes: None.

Sincerely,



Lorna Livingtree
Auditor

Appendix A: Source Code

The client source code is listed below.

Methods.h

```
/*      FILE:          METHODS.H
*
*      Microsoft TPC-C Kit Ver. 4.20.000
*      Copyright Microsoft, 1999
*
*      All Rights Reserved
*
*      not yet audited
*
*      PURPOSE: Header file for COM components.
*
*      Change history:
*      4.20.000 - first version
*/
enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    }

    CCOMPONENT_ERR(COMPONENT_ERROR Err, char *szTextDetail, DWORD
dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail, szTextDetail );
        m_SystemErr = dwSystemErr;
        m_szErrorText = NULL;
    }

    ~CCOMPONENT_ERR()
    {
        if (m_szTextDetail != NULL)

```

```
            delete [] m_szTextDetail;
        if (m_szErrorText != NULL)
            delete [] m_szErrorText;
    };

    COMPONENT_ERROR     m_Error;
    char                *m_szTextDetail;
    char                *m_szErrorText;
    DWORD               m_SystemErr;

    int ErrorType() {return ERR_TYPE_COMPONENT;};
    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

static void WriteMessageToEventLog(LPTSTR lpszMsg);

///////////////////////////////
// CTPCC_Common
class CTPCC_Common :
    public ITPCC,
    public IOBJECTCONTROL,
    public IOBJECTCONSTRUCT,
    public CCOMOBJECTROOTEX<CCOMSINGLETHREADMODEL>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
    COM_INTERFACE_ENTRY(ITPCC)
    COM_INTERFACE_ENTRY(IOBJECTCONTROL)
    COM_INTERFACE_ENTRY(IOBJECTCONSTRUCT)
END_COM_MAP()

    CTPCC_Common();
    ~CTPCC_Common();

// ITPCC
public:
    HRESULT __stdcall NewOrder(           VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Payment(           VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Delivery(          VARIANT txn_in, VARIANT* txn_out);
{return E_NOTIMPL;}
    HRESULT __stdcall StockLevel(         VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall OrderStatus(        VARIANT txn_in, VARIANT* txn_out);

    HRESULT __stdcall CallSetComplete();

// IOBJECTCONTROL
    STDMETHODIMP_(BOOL) CanBePooled() { return m_bCanBePooled; }
    STDMETHODIMP Activate() { return S_OK; } // we don't support COM
Services transactions (no enlistment)
    STDMETHODIMP_(void) Deactivate() { /* nothing to do */ }

// IOBJECTCONSTRUCT
    STDMETHODIMP Construct(IDispatch * pUnk);

    // helper methods
private:
    BOOL             m_bCanBePooled;
    CTPCC_BASE       *m_pTxn;
    struct COM_DATA

```

```

{
    int retval;
    int error;
    union
    {
        NEW_ORDER_DATA           NewOrder;
        PAYMENT_DATA             Payment;
        DELIVERY_DATA            Delivery;
        STOCK_LEVEL_DATA         StockLevel;
        ORDER_STATUS_DATA        OrderStatus;
    } u;
};

// CTPCC
class CTPCC :
    public CTPCC_Common,
    public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()
};

// CNewOrder
class CNewOrder :
    public CTPCC_Common,
    public CComCoClass<CNewOrder, &CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

BEGIN_COM_MAP(CNewOrder)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall Payment(           VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(      VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
};

// COrderStatus
class COrderStatus :
{
    int retval;
    int error;
    union
    {
        NEW_ORDER_DATA           NewOrder;
        PAYMENT_DATA             Payment;
        DELIVERY_DATA            Delivery;
        STOCK_LEVEL_DATA         StockLevel;
        ORDER_STATUS_DATA        OrderStatus;
    } u;
};

// CTPCC_Common
public CComCoClass<COrderStatus, &CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall Payment(           VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(      VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
};

// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment, &CLSID_Payment>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall Payment(           VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(      VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
};

// CStockLevel
class CStockLevel :
    public CTPCC_Common,
    public CComCoClass<CStockLevel, &CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
}

```

```

END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(           VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
    HRESULT __stdcall Payment(          VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
//    HRESULT __stdcall StockLevel( VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(     VARIANT txn_in, VARIANT* txn_out)
{return E_NOTIMPL;}
};


```

ReadRegistry.cpp

```

/*      FILE:          READREGISTRY.CPP
*      Microsoft TPC-C Kit Ver. 4.20.000
*      Copyright Microsoft, 1999
*
*      All Rights Reserved
*
*      not yet audited
*
*      PURPOSE: Implementation for TPC-C Tuxedo class.
*      Contact: Charles Levine (clevine@microsoft.com)
*
*      Change history:
*      4.20.000 - first version
*/
/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE: This function reads the NT registry for startup parameters.
There parameters are
*           under the TPCC key.
*
* RETURNS FALSE = no errors
*           TRUE = error reading registry
*/
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg )
{
    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE, "SOFTWARE\\Microsoft\\TPCC", 0,
KEY_READ, &hKey) != ERROR_SUCCESS )
        return TRUE;

    // determine database protocol to use; may be either ODBC or DBLIB
    pReg->eDB_Protocol = Unspecified;
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "DB_Protocol", 0, &type, (BYTE *)&szTmp, &size)
== ERROR_SUCCESS )
    {
        if ( !strcmp(szTmp, szDBNames[ODBC]) )
            pReg->eDB_Protocol = ODBC;
        else if ( !strcmp(szTmp, szDBNames[DBLIB]) )
            pReg->eDB_Protocol = DBLIB;
    }
}


```

```

}
pReg->eTxnMon = None;
// determine txn monitor to use; may be either TUXEDO, or blank
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "TxnMonitor", 0, &type, (BYTE *)&szTmp, &size)
== ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, szTxnMonNames[TUXEDO]) )
        pReg->eTxnMon = TUXEDO;
    else if ( !strcmp(szTmp, szTxnMonNames[ENCINA]) )
        pReg->eTxnMon = ENCINA;
    else if ( !strcmp(szTmp, szTxnMonNames[COM]) )
        pReg->eTxnMon = COM;
}

pReg->bCOM_SinglePool = FALSE;
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "COM_SinglePool", 0, &type, (BYTE *)&szTmp,
&size) == ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, "YES") )
        pReg->bCOM_SinglePool = TRUE;
}

pReg->dwMaxConnections = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "MaxConnections", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxConnections = dwTmp;

pReg->dwMaxPendingDeliveries = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "MaxPendingDeliveries", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxPendingDeliveries = dwTmp;

pReg->dwNumberOfDeliveryThreads = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "NumberOfDeliveryThreads", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwNumberOfDeliveryThreads = dwTmp;

size = sizeof( pReg->szPath );
if ( RegQueryValueEx(hKey, "Path", 0, &type, (BYTE *)&pReg->szPath, &size)
!= ERROR_SUCCESS )
    pReg->szPath[0] = 0;

size = sizeof( pReg->szDbServer );
if ( RegQueryValueEx(hKey, "DbServer", 0, &type, (BYTE *)&pReg-
>szDbServer, &size) != ERROR_SUCCESS )
    pReg->szDbServer[0] = 0;

size = sizeof( pReg->szDbName );
if ( RegQueryValueEx(hKey, "DbName", 0, &type, (BYTE *)&pReg->szDbName,
&size) != ERROR_SUCCESS )
    pReg->szDbName[0] = 0;

size = sizeof( pReg->szDbUser );

```

```

        if ( RegQueryValueEx(hKey, "DbUser", 0, &type, (BYTE *)&pReg->szDbUser,
&size) != ERROR_SUCCESS )
            pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0, &type, (BYTE *)&pReg-
>szDbPassword, &size) != ERROR_SUCCESS )
            pReg->szDbPassword[0] = 0;

        RegCloseKey(hKey);

        return FALSE;
    }
}

```

ReadRegistry.h

```

/*
 *      FILE:          ReadRegistry.h
 *      Microsoft TPC-C Kit Ver. 4.20.000
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      not audited
 *
 *      PURPOSE: Header for registry related code.
 *
 *      Change history:
 *      4.20.000 - first version
 */

enum DBPROTOCOL { Unspecified, ODBC, DBLIB };
const char *szDBNames[] = { "Unspecified", "ODBC", "DBLIB" };

enum TXNMON { None, TUXEDO, ENCINA, COM };
const char *szTxnMonNames[] = { "NONE", "TUXEDO", "ENCINA", "COM" };

//This structure defines the data necessary to keep distinct for each terminal or
client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbServer[32];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg );

```

WEBCLNT.DSP

```

# Microsoft Developer Studio Project File - Name="webclnt" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 5.00
# *** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Application" 0x0101

```

```

CFG=webclnt - Win32 Release
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak" CFG="webclnt - Win32 Release"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "webclnt - Win32 Release" (based on "Win32 (x86) Application")
!MESSAGE "webclnt - Win32 Debug" (based on "Win32 (x86) Application")
!MESSAGE

# Begin Project
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rsrc.exe

!IF "$(CFG)" == "webclnt - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir ".\Release"
# PROP BASE Intermediate_Dir ".\Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\Release"
# PROP Intermediate_Dir ".\Release"
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /win32
# ADD MTL /nologo /D "NDEBUG" /mktypilib203 /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /machine:I386

!ELSEIF "$(CFG)" == "webclnt - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir ".\Debug"
# PROP BASE Intermediate_Dir ".\Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1

```

```

# PROP Output_Dir ".\Debug"
# PROP Intermediate_Dir ".\Debug"
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX
/c
# ADD CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD
/c
# ADD BASE MTL /nologo /D "_DEBUG" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /debug /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /debug /machine:I386

!ENDIF

# Begin Target

# Name "webclnt - Win32 Release"
# Name "webclnt - Win32 Debug"
# End Target
# End Project

```

Webclnt.dsw

```

Microsoft Developer Studio Workspace File, Format Version 6.00
# WARNING: DO NOT EDIT OR DELETE THIS WORKSPACE FILE!
#####
Project: "db_dblib_dll"=.\db_dblib_dll\db_dblib_dll.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
Project: "db_odbc_dll"=.\db_odbc_dll\db_odbc_dll.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####

```

```

Project: "install"=.\install\install.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

Package=<4>
{{{
    Begin Project Dependency
    Project_Dep_Name isapi_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tuxapp
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name db_dblib_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name db_odbc_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tm_com_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tm_tuxedo_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tpcc_com_all
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tpcc_com_ps
    End Project Dependency
}}}

#####
Project: "isapi_dll"=.\\isapi_dll\\isapi_dll.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

Package=<4>
{{{
    Begin Project Dependency
    Project_Dep_Name db_dblib_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name db_odbc_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tm_tuxedo_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tm_com_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tm_encina_dll
    End Project Dependency
}}}

#####

```

```

Project: "tm_com_dll"=.\tm_com_dll\tm_com_dll.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

Package=<4>
{{{
    Begin Project Dependency
    Project_Dep_Name tpcc_com_ps
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tpcc_com_all
    End Project Dependency
}}}

#####
Project: "tm_encina_dll"=.\tm_encina_dll\tm_encina_dll.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
Project: "tm_tuxedo_dll"=.\tm_tuxedo_dll\tm_tuxedo_dll.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
Project: "tpcc_com_all"=.\tpcc_com_all\tpcc_com_all.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

    Begin Project Dependency
    Project_Dep_Name tpcc_com_ps
    End Project Dependency
}}}

#####
Project: "tpcc_com_ps"=.\tpcc_com_ps\tpcc_com_ps.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

```

```

Package=<4>
{{{
}}}

#####
Project: "tuxapp"=.\tuxapp\tuxapp.dsp - Package Owner=<4>
Package=<5>
{{{
}}}

Package=<4>
{{{
    Begin Project Dependency
    Project_Dep_Name db_dbllib_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name db_odbc_dll
    End Project Dependency
}}}

#####
Global:
Package=<5>
{{{
}}}

Package=<3>
{{{
}}}

#####
db_dbllib_dll.dsp
# Microsoft Developer Studio Project File - Name="db_dbllib_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=db_dbllib_dll - Win32 IceCAP
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "db_dbllib_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "db_dbllib_dll.mak" CFG="db_dbllib_dll - Win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "db_dbllib_dll - Win32 Release" (based on "Win32 (x86) Dynamic-Link
Library")
!MESSAGE "db_dbllib_dll - Win32 Debug" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE "db_dbllib_dll - Win32 IceCAP" (based on "Win32 (x86) Dynamic-Link Library")

```

```

!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "db_dplib_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
# BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbc32.lib
/nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 ntdbllib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib /nologo
/subsystem:windows /dll /machine:I386 /out:".\\bin\\tpcc_dplib.dll"

!ELSEIF "$(CFG)" == "db_dplib_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /W3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
# BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 ntdbllib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib /nologo
/subsystem:windows /dll /debug /machine:I386 /out:".\\bin\\tpcc_dplib.dll"
/pdbtype:sept

# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbc32.lib
/nologo /subsystem:windows /dll /debug /machine:I386 /pdptype:sept
# ADD LINK32 ntdbllib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib /nologo
/subsystem:windows /dll /debug /machine:I386 /out:".\\bin\\tpcc_dplib.dll"
/pdbtype:sept

!ELSEIF "$(CFG)" == "db_dplib_dll - Win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "db_dplib"
# PROP BASE Intermediate_Dir "db_dplib"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MDd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /Gm /GX /Zi /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /D "ICECAP" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
# BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 ntdbllib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib /nologo
/subsystem:windows /dll /debug /machine:I386 /out:".\\bin\\tpcc_dplib.dll"
/pdbtype:sept
# ADD LINK32 icap.lib ntdbllib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib /nologo
/subsystem:windows /dll /debug /machine:I386 /out:".\\bin\\tpcc_dplib.dll"
/pdbtype:sept

!ENDIF

# Begin Target

# Name "db_dplib_dll - Win32 Release"
# Name "db_dplib_dll - Win32 Debug"
# Name "db_dplib_dll - Win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.cpp"
# Begin Source File

SOURCE=.\\src\\tpcc_dplib.cpp
# End Source File
# End Group
# Begin Group "Header"

```

```

# PROP Default_Filter "*.h"
# Begin Source File

SOURCE=..\common\src\error.h
# End Source File
# Begin Source File

SOURCE=..\src\tpcc_dblib.h
# End Source File
# Begin Source File

SOURCE=..\common\src\trans.h
# End Source File
# Begin Source File

SOURCE=..\common\src\txn_base.h
# End Source File
# End Group
# End Target
# End Project

```

db_odbc_dll.dsp

```

# Microsoft Developer Studio Project File - Name="db_odbc_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=db_odbc_dll - Win32 IceCAP
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "db_odbc_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "db_odbc_dll.mak" CFG="db_odbc_dll - Win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "db_odbc_dll - Win32 Release" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE "db_odbc_dll - Win32 Debug" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE "db_odbc_dll - Win32 IceCAP" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rcc.exe

!IF "$(CFG)" == "db_odbc_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""


```

```

# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD
/c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o /win32 "NUL"
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o /win32 "NUL"
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbcpp32.lib
/nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbcpp32.lib
/nologo /subsystem:windows /dll /machine:I386 /out:".bin\tpcc_odbc.dll"

!ELSEIF "$(CFG)" == "db_odbc_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "DEBUG" /D "_WINDOWS"
/YX /FD /c
# ADD CPP /nologo /MDd /W3 /GX /ZI /Od /D "WIN32" /D "DEBUG" /D "_WINDOWS" /YX /FD
/c
# ADD BASE MTL /nologo /D "DEBUG" /mktyplib203 /o /win32 "NUL"
# ADD MTL /nologo /D "DEBUG" /mktyplib203 /o /win32 "NUL"
# ADD BASE RSC /I 0x409 /d "DEBUG"
# ADD RSC /I 0x409 /d "DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbcpp32.lib
/nologo /subsystem:windows /dll /debug /machine:I386 /pdptype:sept
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbcpp32.lib
/nologo /subsystem:windows /dll /debug /machine:I386 /out:".bin\tpcc_odbc.dll"
/pdptype:sept

!ELSEIF "$(CFG)" == "db_odbc_dll - Win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "db_odbc_"
# PROP BASE Intermediate_Dir "db_odbc_"

```

```

# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MDd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/YX /FD /Gh /
# ADD CPP /nologo /MD /W3 /Gm /GX /Zi /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /D
"ICECAP" /YX /FD /Gh /
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o /win32 "NUL"
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o /win32 "NUL"
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /dll /debug /machine:I386 /out:".\\bin\tpcc_odbc.dll"
/pdbtype:sept
# ADD LINK32 icap.lib kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /dll /debug /machine:I386 /out:".\\bin\tpcc_odbc.dll"
/pdbtype:sept

!ENDIF

# Begin Target

# Name "db_odbc_dll - Win32 Release"
# Name "db_odbc_dll - Win32 Debug"
# Name "db_odbc_dll - Win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.cpp"
# Begin Source File

SOURCE=.\\src\\tpcc_odbc.cpp
# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*.h"
# Begin Source File

SOURCE=..\common\src\error.h
# End Source File
# Begin Source File

SOURCE=..\src\tpcc_odbc.h
# End Source File
# Begin Source File

SOURCE=..\common\src\trans.h
# End Source File
# Begin Source File

SOURCE=..\common\src\txn_base.h
# End Source File

```

```

# End Group
# End Target
# End Project

```

dlldata.c

```

*****
DllData File -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file compile.

To completely reconstruct this file, delete it and rerun MIDL
on all the IDL files in this DLL, specifying this file for the
/dlldata command line option

*****

#include <rpcproxy.h>

#ifndef __cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

#ifndef __cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */

```

error.h

```

/*           FILE:          ERROR.H
*           *
*           *           Microsoft TPC-C Kit Ver. 4.20.000
*           *           Copyright Microsoft, 1999
*           *           All Rights Reserved
*           *
*           *           Version 4.10.000 audited by Richard Gimarc,
*           *           Performance Metrics, 3/17/99
*           *
*           *           PURPOSE: Header file for error exception classes.
*           *
*           *           Change history:
*           *           4.20.000 - updated rev number to match kit
*           *           4.21.000 - fixed bug: ~CBaseErr needed to be declared virtual
*           */

```

```

#pragma once

#ifndef _INC_STRING
    #include <string.h>
#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int             iError;                      //error id of
message   char      szMsg[256];                //message to sent to
browser } SERRORMSG;

typedef enum _ErrorLevel
{
    ERR_FATAL_LEVEL           = 1,
    ERR_WARNING_LEVEL          = 2,
    ERR_INFORMATION_LEVEL       = 3
} ErrorLevel;

#define ERR_TYPE_LOGIC          -1           //logic error in program; internal error
#define ERR_SUCCESS              0           //success (a non-error error)
#define ERR_BAD_ITEM_ID          1           //expected abort record in txnRecord
#define ERR_TYPE_DELIVERY_POST    2           //expected delivery post failed
#define ERR_TYPE_WEBDLL           3           //tpcc web generated error
#define ERR_TYPE_SQL               4           //sql server generated error
#define ERR_TYPE_DBLIB              5           //dblib generated error
#define ERR_TYPE_ODBC              6           //odbc generated error
#define ERR_TYPE_SOCKET             7           //error on communication socket client rte only
#define ERR_TYPE_DEADLOCK           8           //dblib and odbc only deadlock condition
#define ERR_TYPE_COM                 9           //error from COM call
#define ERR_TYPE_TUXEDO             10          //tuxedo error
#define ERR_TYPE_OS                  11          //operating system error
#define ERR_TYPE_MEMORY               12          //memory allocation error
#define ERR_TYPE_TPCC_ODBC            13          //error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB             14          //error from tpcc dblib txn module
#define ERR_TYPE_DELISRV              15          //delivery server error
#define ERR_TYPE_TXNLOG                16          //txn log error

#define ERR_TYPE_BCCCONN            17          //Benchcraft connection class
#define ERR_TYPE_TPCC_CONN            18          //Benchcraft connection class
#define ERR_TYPE_ENCINA               19          //Encina error
#define ERR_TYPE_COMPONENT              20          //error from COM component
#define ERR_TYPE_RTE                  21          //Benchcraft rte
#define ERR_TYPE_AUTOMATION             22          //Benchcraft automation errors
#define ERR_TYPE_DRIVER                23          //Driver engine errors
#define ERR_TYPE_RTE_BASE                24          //Framework errors
#define ERR_BUF_OVERFLOW                  25          //Buffer overflow during receive
// TPC-W error types
#define ERR_TYPE_TPCW_CONN            50          //Benchcraft connection class
#define ERR_TYPE_TPCW_HTML               51          //error from TpcwHtml dll
#define ERR_TYPE_TPCW_USER                52          //error from TPC-W user class
#define ERR_TYPE_TPCW_ENG_BASE            53          //Driver engine errors
#define ERR_TYPE_TPCW_ENG_OS                54          //Framework errors
#define ERR_TYPE_HTML_RESP                  55          //Buffer overflow during receive
#define ERR_TYPE_TPCW_ODBC                56          //TPC-W user class
#define ERR_TYPE_SCHANNEL                  57          //Driver engine errors

#define ERR_INS_MEMORY                  "Insufficient Memory to continue."
#define ERR_UNKNOWN                     "Unknown error."
#define ERR_MSG_BUF_SIZE                  512         -1
#define INV_ERROR_CODE                    1           "Insufficient Buffer size to recieve HTML pages."

class CBaseErr
{
public:
    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg           = INV_ERROR_CODE;

        if (szLoc)
        {
            m_szLoc = new char[m_szLoc_size];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc     = NULL;

        m_szApp           = new char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL), m_szApp, m_szApp_size);
    }
}

```

```

CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
{
    m_idMsg           = idMsg;

    if (szLoc)
    {
        m_szLoc = new char[m_szLoc_size];
        strcpy(m_szLoc, szLoc);
    }
    else
        m_szLoc = NULL;

    m_szApp          = new char[m_szApp_size];
    GetModuleFileName(GetModuleHandle(NULL), m_szApp, m_szApp_size);
}

virtual ~CBaseErr(void)
{
    if (m_szApp)
        delete [] m_szApp;
    if (m_szLoc)
        delete [] m_szLoc;
};

virtual void Draw(HWND hwnd, LPCTSTR szStr = NULL)
{
    int             j = 0;
    char           szTmp[512];

    if (szStr)
        j = wsprintf(szTmp, "%s\n", szStr);
    if (ErrorNum() != INV_ERROR_CODE)
        j += wsprintf(szTmp+j, "Error = %d\n", ErrorNum());
    if (m_szLoc)
        j += wsprintf(szTmp+j, "Location = %s\n",
GetLocation());
        j += wsprintf(szTmp+j, "%s\n", ErrorText());
    if (m_szApp)
        j += wsprintf(szTmp+j, "%s\n", m_szApp);
    if (m_szLoc)
        j += wsprintf(szTmp+j, "%s\n", m_szLoc);

    MessageBox(hwnd, szTmp, m_szApp, MB_OK);
}

char *GetApp(void) { return m_szApp; }
char *GetLocation(void) { return m_szLoc; }
virtual int ErrorNum() { return m_idMsg; }

virtual int ErrorType() = 0; // a value which distinguishes the kind of
error that occurred
virtual char *ErrorText() = 0; // a string (i.e., human readable)
representation of the error

protected:
    char      *m_szApp;
    char      *m_szLoc; // code location where the error occurred
    int       m_idMsg;

    //short   m_errType;
};

```

```

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eSend,
        eSocket,
        eBind,
        eConnect,
        eListen,
        eHost,
        eRecv,
        eGetHostByName,
        eWSACreateEvent,
        eWSASend,
        eWSASendImage,
        eWSAGetOverlappedResult,
        eWSARecv,
        eWSARecvImage,
        eWSAWaitForMultipleEvents,
        eWSAStartup,
        eWSAResetEvent,
        eNonRetryable,
    };

    CSocketErr(Action eAction, LPCTSTR szLocation = NULL);
    ~CSocketErr()
    {
        if (m_szErrorText != NULL)
            delete [] m_szErrorText;
    };

    Action     m_eAction;
    char      *m_szErrorText;

    int ErrorType() { return ERR_TYPE_SOCKET; }
    char *ErrorText(void);
};

class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile = 10,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
    };

```

```

        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        ebeginthread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
        eRegisterClassEx,
        eCreateWindow,
        eCreateSemaphore,
        eFSSeek,
        eFRead,
        eFWrite,
        eTmpFile,
        eSetFilePointer,
        eNew,
    };

    CSystemErr(Action eAction, LPCTSTR szLocation);
    CSystemErr(int iError, Action eAction, LPCTSTR
szLocation);
    int           ErrorType() { return ERR_TYPE_OS; }
    char *ErrorText(void);
    void Draw(HWND hwnd, LPCTSTR szStr = NULL);

    Action m_eAction;

private:
    char m_szMsg[ERR_MSG_BUF_SIZE];
};

class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr();

    int ErrorType() {return ERR_TYPE_MEMORY;}
    char *ErrorText() {return ERR_INS_MEMORY;}
};

class CBufferOverflowErr : public CBaseErr
{
public:
    CBufferOverflowErr(int,LPTSTR);

    int ErrorType() {return ERR_BUF_OVERFLOW;}
    char *ErrorText() {return ERR_INS_BUF_OVERFLOW;}
};

```

install.c

```

/*      FILE:          INSTALL.C
*      Microsoft TPC-C Kit Ver. 4.20.000
*      Copyright Microsoft, 1999
*      All Rights Reserved
*      not audited

```

```

*
*      PURPOSE: Automated installation application for TPC-C Web Kit
*      Contact: Charles Levine (clevine@microsoft.com)
*
*      Change history:
*                      4.20.000 - added COM installation steps
*/
#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <stdio.h>
#include <comctrl.h>
#include "..\..\common\src\ReadRegistry.h"

#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON hIcon;
HINSTANCE hInst;

DWORD versionExeMS;
DWORD versionExeS;
DWORD versionExeMM;
DWORD versionDllMS;
DWORD versionDllS;

// TPC-C registry settings
TPCCREGISTRYDATA Reg;

static int iPoolThreadLimit;
static int iThreadTimeout;
static int iListenBackLog;
static int iAcceptExOutstanding;

static int iMaxPhysicalMemory; //max physical memory in MB
static char szLastFileName[64]; // last file we worked on (for error reporting)

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
static void ProcessOK(HWND hwnd, char *szDllPath);
static void ReadRegistrySettings(void);
static void WriteRegistrySettings(char *szDllPath);
static BOOL RegisterDLL(char *szFileName);
static int CopyFiles(HWND hDlg, char *szDllPath);
static BOOL GetInstallPath(char *szDllPath);
static void GetVersionInfo(char *szDLLPath, char *szExePath);
static BOOL CheckWWWWebService(void);
static BOOL StartWWWWebService(void);
static BOOL StopWWWWebService(void);
static void UpdateDialog(HWND hDlg);

BOOL install_com(char *szDllPath);

```

```

#include "..\..\common\src\ReadRegistry.cpp"

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE hPrevInstance, LPSTR lpCmdLine,
int nCmdShow )
{
    int iRc;

    hInst = hInstance;

    InitCommonControls();

    hIcon = LoadIcon(hInstance, MAKEINTRESOURCE(IDI_ICON1));

    iRc = DialogBox(hInstance, MAKEINTRESOURCE(IDD_DIALOG4),
GetDesktopWindow(), LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance, MAKEINTRESOURCE(IDD_DIALOG1),
GetDesktopWindow(), MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(), UpdatedDlgProc, (LPARAM)iRc);
        }
    }

    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
    HGLOBAL             hRes;
    HRSRC              hResInfo;
    BYTE               *pSrc, *pDst;
    DWORD              dwSize;
    static HFONT        hFont;
    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12, 0, 0, 0, 400, 0, 0, 0, 0, 0,
0, 0, 0, "Arial");
            SendMessage( GetDlgItem(hwnd, IDR_LICENSE1),
WM_SETFONT, (WPARAM)hFont, MAKELPARAM(0, 0));
            PostMessage(hwnd, WM_INITTEXT, (WPARAM)0, (LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo = FindResource(hInst,
MAKEINTRESOURCE(IDR_LICENSE1), "LICENSE");
            dwSize = SizeofResource(hInst, hResInfo);
            hRes = LoadResource(hInst, hResInfo );
            pSrc = (BYTE *)LockResource(hRes);
            pDst = (unsigned char *)malloc(dwSize+1);
            if ( pDst )
            {
                memcpy(pDst, pSrc, dwSize);
                pDst[dwSize] = 0;
                SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pDst);
            }
            else
        }
    }
}

```

```

SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);

return TRUE;
case WM_DESTROY:
DeleteObject(hFont);
return TRUE;
case WM_COMMAND:
if ( wParam == IDOK )
    EndDialog(hwnd, TRUE);
if ( wParam == IDCANCEL )
    EndDialog(hwnd, FALSE);
default:
break;
}
return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
switch(uMsg)
{
    case WM_INITDIALOG:
        switch(lParam)
        {
            case 1:
            case 2:
                SetDlgItemText(hwnd, IDC_RESULTS,
"TPC-C Web Client Installed");
                break;
        }
        return TRUE;
    case WM_COMMAND:
        if ( wParam == IDOK )
            EndDialog(hwnd, TRUE);
        break;
    default:
        break;
}
return FALSE;
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
PAINTSTRUCT          ps;
MEMORYSTATUS         memoryStatus;
OSVERSIONINFO        VI;
char                 szTmp[256];
static char          szDllPath[256];
static char          szExePath[256];

switch(uMsg)
{
    case WM_INITDIALOG:
        GlobalMemoryStatus(&memoryStatus);
        iMaxPhysicalMemory = (memoryStatus.dwTotalPhys/
1048576);
        if ( GetInstallPath(szDllPath) )
        {
            MessageBox(hwnd, "Error internet service
inetsrv is not installed.", NULL, MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, FALSE);
            return TRUE;
        }
}
}

```

```

    }

    // set default values
ZeroMemory( &Reg, sizeof(Reg) );
Reg.dwNumberOfDeliveryThreads = 4;
Reg.dwMaxConnections = 100;
Reg.dwMaxPendingDeliveries = 100;
Reg.eDB_Protocol = DBLIB;
Reg.eTxnMon = None;
strcpy(Reg.szDbServer,           "");
strcpy(Reg.szDbName,             "tpcc");
strcpy(Reg.szDbUser,              "sa");
strcpy(Reg.szDbPassword,          "");

iPoolThreadLimit = iMaxPhysicalMemory * 2;
iThreadTimeout = 86400;
iListenBackLog = 15;
iAcceptExOutstanding = 40;

ReadTPCCRegistrySettings( &Reg );
ReadRegistrySettings();

GetModuleFileName(hInst, szExePath,
sizeof(szExePath));
GetVersionInfo(szDllPath, szExePath);

wsprintf(szTmp, "Version %d.%2.2d.%3.3d",
versionExeMS, versionExeMM, versionExeLS);
SetDlgItemText(hwnd, IDC_VERSION, szTmp);

SetDlgItemText(hwnd, IDC_PATH, szDllPath);
SetDlgItemText(hwnd, ED_DB_SERVER, Reg.szDbServer);
SetDlgItemText(hwnd, ED_DB_USER_ID, Reg.szDbUser);
SetDlgItemText(hwnd, ED_DB_PASSWORD,
Reg.szDbPassword);
SetDlgItemText(hwnd, ED_DB_NAME, Reg.szDbName);

SetDlgItemInt(hwnd, ED_THREADS,
Reg.dwNumberOfDeliveryThreads, FALSE);
SetDlgItemInt(hwnd, ED_MAXCONNECTION,
Reg.dwMaxConnections, FALSE);
SetDlgItemInt(hwnd, ED_MAXDELIVERIES,
Reg.dwMaxPendingDeliveries, FALSE);
SetDlgItemInt(hwnd, ED_IIS_MAX_THREAD_POOL_LIMIT,
iPoolThreadLimit, FALSE);
SetDlgItemInt(hwnd, ED_IIS_THREAD_TIMEOUT,
iThreadTimeout, FALSE);
SetDlgItemInt(hwnd, ED_IIS_LISTEN_BACKLOG,
iListenBackLog, FALSE);
SetDlgItemInt(hwnd, ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);

CheckDlgButton(hwnd, IDC_DBLIB, 0);
CheckDlgButton(hwnd, IDC_ODBC, 0);
if ( Reg.eDB_Protocol == DBLIB )
    CheckDlgButton(hwnd, IDC_DBLIB, 1);
else
    CheckDlgButton(hwnd, IDC_ODBC, 1);

// check OS version level for COM. Must be at least
Windows 2000
VI.dwOSVersionInfoSize = sizeof(VI);

```

```

option

GetVersionEx( &VI );
if (VI.dwMajorVersion < 5)
{
    HWND hDlg = GetDlgItem( hwnd, IDC_TM_MTS );
    EnableWindow( hDlg, 0 ); // disable COM

    if (Reg.eTxnMon == COM)
        Reg.eTxnMon = None;
}

CheckDlgButton(hwnd, IDC_TM_NONE, 0);
CheckDlgButton(hwnd, IDC_TM_TUXEDO, 0);
CheckDlgButton(hwnd, IDC_TM_MTS, 0);
CheckDlgButton(hwnd, IDC_TM_ENCINA, 0);
switch (Reg.eTxnMon)
{
case None:
    CheckDlgButton(hwnd, IDC_TM_NONE, 1);
    break;
case TUXEDO:
    CheckDlgButton(hwnd, IDC_TM_TUXEDO, 1);
    break;
case ENCINA:
    CheckDlgButton(hwnd, IDC_TM_ENCINA, 1);
    break;
case COM:
    CheckDlgButton(hwnd, IDC_TM_MTS, 1);
    break;
}

return TRUE;
case WM_PAINT:
    if ( IsIconic(hwnd) )
    {
        BeginPaint(hwnd, &ps);
        DrawIcon(ps.hdc, 0, 0, hIcon);
        EndPaint(hwnd, &ps);
        return TRUE;
    }
    break;
case WM_COMMAND:
    if ( HIWORD(wParam) == BN_CLICKED )
    {
        switch ( LOWORD(wParam) )
        {
            case IDC_DBLIB:
                return TRUE;
            case IDC_ODBC:
                return TRUE;
            case IDOK:
                ProcessOK(hwnd,
                    szDllPath);
                return TRUE;
            case IDCANCEL:
                EndDialog(hwnd, FALSE);
                return TRUE;
            default:
                return FALSE;
        }
    }
    break;
default:
    break;
}

```

```

        }

    return FALSE;
}

static void ProcessOK(HWND hwnd, char *szDllPath)
{
    int          d;
    HWND         hDlg;
    int          rc;

    char      szFullName[256];
    char      szErrTxt[128];

    // read settings from dialog
    Reg.dwNumberOfDeliveryThreads = GetDlgItemInt(hwnd, ED_THREADS, &d,
FALSE);
    Reg.dwMaxConnections = GetDlgItemInt(hwnd, ED_MAXCONNECTION, &d, FALSE);
    Reg.dwMaxPendingDeliveries = GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d,
FALSE);

    GetDlgItemText(hwnd, ED_DB_SERVER, Reg.szDbServer,
sizeof(Reg.szDbServer));
    GetDlgItemText(hwnd, ED_DB_USER_ID, Reg.szDbUser, sizeof(Reg.szDbUser));
    GetDlgItemText(hwnd, ED_DB_PASSWORD, Reg.szDbPassword,
sizeof(Reg.szDbPassword));
    GetDlgItemText(hwnd, ED_DB_NAME, Reg.szDbName, sizeof(Reg.szDbName));

    if ( IsDlgButtonChecked(hwnd, IDC_DBLIB) )
    {
        Reg.eDB_Protocol = DBLIB;
        rc = 1;
    }
    else if ( IsDlgButtonChecked(hwnd, IDC_ODBC) )
    {
        Reg.eDB_Protocol = ODBC;
        rc = 2;
    }

    if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE) )
        Reg.eTxnMon = None;
    else if ( IsDlgButtonChecked(hwnd, IDC_TM_TUXEDO) )
        Reg.eTxnMon = TUXEDO;
    else if ( IsDlgButtonChecked(hwnd, IDC_TM_MTS) )
        Reg.eTxnMon = COM;
    else if ( IsDlgButtonChecked(hwnd, IDC_TM_ENCINA) )
        Reg.eTxnMon = ENCINA;

    iPoolThreadLimit = GetDlgItemInt(hwnd, ED_IIS_MAX_THREAD_POOL_LIMIT, &d,
FALSE);
    iThreadTimeout = GetDlgItemInt(hwnd, ED_IIS_THREAD_TIMEOUT, &d, FALSE);
    iListenBackLog = GetDlgItemInt(hwnd, ED_IIS_LISTEN_BACKLOG, &d, FALSE);
    iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);

    ShowWindow(hwnd, SW_HIDE);
    hDlg = CreateDialog(hInst, MAKEINTRESOURCE(IDD_DIALOG3), hwnd,
CopyDlgProc);
    ShowWindow(hDlg, SW_SHOWNA);
    UpdateDialog(hDlg);

    // write binaries to inetpub\wwwroot
}

```

```

rc = CopyFiles(hDlg, szDllPath);
if ( !rc )
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error(s) occurred when creating " );
    strcat( szErrTxt, szLastFileName );
    MessageBox(hwnd, szErrTxt, NULL, MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// update registry
SetDlgItemText(hDlg, IDC_STATUS, "Updating Registry.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
WriteRegistrySettings(szDllPath);

// register com proxy stub
strcpy(szFullName, szDllPath);
strcat(szFullName, "tpcc_com_ps.dll");
if (!RegisterDLL(szFullName))
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error occurred when registering " );
    strcat( szErrTxt, szFullName );
    MessageBox(hwnd, szErrTxt, NULL, MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// if using COM
if (Reg.eTxnMon == COM)
{
    SetDlgItemText(hDlg, IDC_STATUS, "Configuring COM.");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    if (install_com(szDllPath))
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "Error occurred when configuring COM
settings." );
        MessageBox(hwnd, szErrTxt, NULL, MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
    }
    Sleep(100);

    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);

    EndDialog(hwnd, rc);
    return;
}

static void ReadRegistrySettings(void)
{
    HKEY      hKey;
}

```

```

        DWORD      size;
        DWORD      type;

        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Parameters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
        {
            size = sizeof(iPoolThreadLimit);
            if ( RegQueryValueEx(hKey, "PoolThreadLimit", 0, &type, (char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
                if ( !iPoolThreadLimit )
                    iPoolThreadLimit = iMaxPhysicalMemory * 2;

            size = sizeof(iThreadTimeout);
            if ( RegQueryValueEx(hKey, "ThreadTimeout", 0, &type, (char *)&iThreadTimeout, &size) == ERROR_SUCCESS )
                if ( !iThreadTimeout )
                    iThreadTimeout = 86400;

            size = sizeof(iListenBackLog);
            if ( RegQueryValueEx(hKey, "ListenBackLog", 0, &type, (char *)&iListenBackLog, &size) == ERROR_SUCCESS )
                if ( !iListenBackLog )
                    iListenBackLog = 15;

            RegCloseKey(hKey);
        }

        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
        {
            size = sizeof(iAcceptExOutstanding);
            if ( RegQueryValueEx(hKey, "AcceptExOutstanding", 0, &type,
(char *)&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
                if ( !iAcceptExOutstanding )
                    iAcceptExOutstanding = 40;

            RegCloseKey(hKey);
        }

        static void WriteRegistrySettings(char *szDllPath)
{
    HKEY      hKey;
    DWORD     dwDisposition;
    char      szTmp[256];
    char      *ptr;
    int       iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE, "SOFTWARE\\Microsoft\\TPCC", 0,
NULL, REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0, REG_SZ, szTmp, strlen(szTmp)+1);

        RegSetValueEx(hKey, "NumberOfDeliveryThreads", 0, REG_DWORD,
(char *)&Reg.dwNumberOfDeliveryThreads, sizeof(Reg.dwNumberOfDeliveryThreads));
    }
}

```

```

        RegSetValueEx(hKey, "MaxConnections", 0, REG_DWORD, (char *)
*)&Reg.dwMaxConnections, sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hKey, "MaxPendingDeliveries", 0, REG_DWORD, (char *)
*)&Reg.dwMaxPendingDeliveries, sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hKey, "DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol], strlen(szDBNames[Reg.eDB_Protocol])+1);
        RegSetValueEx(hKey, "TxnMonitor", 0, REG_SZ,
szTxnMonNames[Reg.eTxnMon], strlen(szTxnMonNames[Reg.eTxnMon])+1);

        RegSetValueEx(hKey, "DbServer", 0, REG_SZ, Reg.szDbServer,
strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0, REG_SZ, Reg.szDbName,
strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0, REG_SZ, Reg.szDbUser,
strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword", 0, REG_SZ, Reg.szDbPassword,
strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey, "COM_SinglePool", 0, REG_SZ, szTmp,
strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if ( (iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hKey, "PoolThreadLimit", 0, REG_DWORD, (char *)
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
        RegSetValueEx(hKey, "ThreadTimeout", 0, REG_DWORD, (char *)
*)&iThreadTimeout, sizeof(iThreadTimeout));
        RegSetValueEx(hKey, "ListenBackLog", 0, REG_DWORD, (char *)
*)&iListenBackLog, sizeof(iListenBackLog));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if ( (iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hKey, "AcceptExOutstanding", 0, REG_DWORD, (char *)
*)&iAcceptExOutstanding, sizeof(iAcceptExOutstanding));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {

```

```

        SendDlgItemMessage(hwnd, IDC_PROGRESS1, PBM_SETRANGE, 0,
MAKELPARAM(0, 16));
        SendDlgItemMessage(hwnd, IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1,
0);
    }
    return TRUE;
}
return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC     lpDllEntryPoint;

    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib, "DllRegisterServer");
    if (lpDllEntryPoint != NULL)
    {
        return ((*lpDllEntryPoint)() == S_OK);
    }
    else
        return FALSE;           //unable to locate entry point
}

BOOL FileFromResource( char *sz resourceName, int iResourceId, char *szDllPath, char
*szFileName )
{
    HGLOBAL          hDLL;
    HRSRC            hResInfo;
    HANDLE           hFile;
    DWORD            dwSize;
    BYTE             *pSrc;
    DWORD            d;
    char             szFullName[256];

    hResInfo = FindResource(hInst, MAKEINTRESOURCE(iResourceId),
sz(resourceName));
    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !hFile = Createfile(szFullName, GENERIC_WRITE, 0, NULL,
CREATE_ALWAYS, FILE_ATTRIBUTE_NORMAL, NULL) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d, NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

```

```

static int CopyFiles(HWND hDlg, char *szDllPath)
{
    BOOL                 bSvcRunning;
    bSvcRunning = CheckWWWebService();
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS, "Stopping Web Service.");
        SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        StopWWWebService();
        SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }

    SetDlgItemText(hDlg, IDC_STATUS, "Copying Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install TPCC.DLL
    strcpy( szLastFileName, "tpcc.dll" );
    if (!FileFromResource( "TPCCDLL", IDR_TPCCDLL, szDllPath, szLastFileName
))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_dblib.dll
    strcpy( szLastFileName, "tpcc_dblib.dll" );
    if (!FileFromResource( "DBLIB_DLL", IDR_DBLIB_DLL, szDllPath,
szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_odbc.dll
    strcpy( szLastFileName, "tpcc_odbc.dll" );
    if (!FileFromResource( "ODBC_DLL", IDR_ODBC_DLL, szDllPath, szLastFileName
))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tuxapp.exe
    strcpy( szLastFileName, "tuxapp.exe" );
    if (!FileFromResource( "TUXEDO_APP", IDR_TUXEDO_APP, szDllPath,
szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_tuxedo.dll
    strcpy( szLastFileName, "tpcc_tuxedo.dll" );
    if (!FileFromResource( "TUXEDO_DLL", IDR_TUXEDO_DLL, szDllPath,
szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com.dll
    strcpy( szLastFileName, "tpcc_com.dll" );

```

```

        if (!FileFromResource( "COM_DLL", IDR_COM_DLL, szDllPath, szLastFileName
))
{
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.tlb
strcpy( szLastFileName, "tpcc_com_all.tlb" );
if (!FileFromResource( "COM_TYPLIB", IDR_COMTYPLIB_DLL, szDllPath,
szLastFileName ))
{
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_ps.dll
strcpy( szLastFileName, "tpcc_com_ps.dll" );
if (!FileFromResource( "COM_PS_DLL", IDR_COMPS_DLL, szDllPath,
szLastFileName ))
{
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.dll
strcpy( szLastFileName, "tpcc_com_all.dll" );
if (!FileFromResource( "COM_ALL_DLL", IDR_COMALL_DLL, szDllPath,
szLastFileName ))
{
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

//if we stopped service restart it.
if ( bSvcRunning )
{
    SetDlgItemText(hDlg, IDC_STATUS, "Starting Web Service.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
StartWWWebService();
}

SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY hKey;
    BYTE    szData[256];
    DWORD   sv;
    BOOL    bRc;
    int     len;
    int     iRc;

    // Registry key HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\InetStp\PathWWWRoot
is used to find the
    // IIS default web site directory and determine that IIS is installed.

    szDllPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE, "SOFTWARE\Microsoft\InetStp", 0,
KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )

```

```

    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey, "PathWWWRoot", NULL, NULL, szData,
&sv ); // used by IIS 5.0 & 6.0
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szDllPath, szData);
            len = strlen(szDllPath);
            if ( szDllPath[len-1] != '\\' )
            {
                szDllPath[len] = '\\';
                szDllPath[len+1] = 0;
            }
        }
        RegCloseKey(hKey);
    }

    return bRc;
}

static void GetVersionInfo(char *szDLLPath, char *szExePath)
{
    DWORD          d;
    DWORD          dwSize;
    DWORD          dwBytes;
    char           *ptr;
    VS_FIXEDFILEINFO *vs;

    versionDlMS = 0;
    versionDlLS = 0;
    if ( _access(szDLLPath, 00) == 0 )
    {
        dwSize = GetFileVersionInfoSize(szDLLPath, &d);
        if ( dwSize )
        {
            ptr = (char *)malloc(dwSize);
            GetFileVersionInfo(szDLLPath, 0, dwSize, ptr);
            VerQueryValue(ptr, "\\",&vs, &dwBytes);
            versionDlMS = vs->dwProductVersionMS;
            versionDlLS = vs->dwProductVersionLS;
            free(ptr);
        }
    }

    versionExeMS = 0x7FFF;
    versionExeLS = 0x7FFF;
    dwSize = GetFileVersionInfoSize(szExePath, &d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szExePath, 0, dwSize, ptr);
        VerQueryValue(ptr, "\\",&vs, &dwBytes);

        versionExeMS = vs->dwProductVersionMS;
        versionExeLS = LOWORD(vs->dwProductVersionLS);
        versionExeMM = HIWORD(vs->dwProductVersionLS);
        free(ptr);
    }
}

return;
}

```

```

static BOOL CheckWWWService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;

    schSCManager = OpenSCManager(NULL, NULL, SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!QueryServiceStatus(schService, &ssStatus) )
        goto ServiceNotRunning;

    if ( !ControlService(schService, SERVICE_CONTROL_STOP, &ssStatus) )
        goto ServiceNotRunning;
    //start Service pending, Check the status until the service is running.
    if (!QueryServiceStatus(schService, &ssStatus) )
        goto ServiceNotRunning;

    CloseServiceHandle(schService);
    return TRUE;

ServiceNotRunning:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StartWWWService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL, SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!StartService(schService, 0, NULL) )
        goto StartWWWBErr;
    //start Service pending, Check the status until the service is running.
    if (!QueryServiceStatus(schService, &ssStatus) )
        goto StartWWWBErr;
    while( ssStatus.dwCurrentState != SERVICE_RUNNING)
    {

        dwOldCheckPoint = ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);
        //Wait for the specified interval.
        if ( !QueryServiceStatus(schService, &ssStatus) ) //Check the
status again.
            break;
        if (dwOldCheckPoint >= ssStatus.dwCheckPoint)
        //Break if the checkpoint has not been incremented.
            break;
    }
    if (ssStatus.dwCurrentState == SERVICE_RUNNING)
        goto StartWWWBErr;
}

CloseServiceHandle(schService);
return TRUE;

StartWWWBErr:
CloseServiceHandle(schService);
return FALSE;
}

static BOOL StopWWWService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL, SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!QueryServiceStatus(schService, &ssStatus) )
        goto StopWWWBErr;

    if ( !ControlService(schService, SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWBErr;
    //start Service pending, Check the status until the service is running.
    if (!QueryServiceStatus(schService, &ssStatus) )
        goto StopWWWBErr;
    while( ssStatus.dwCurrentState == SERVICE_RUNNING)
    {

        dwOldCheckPoint = ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);
        //Wait for the specified interval.
        if ( !QueryServiceStatus(schService, &ssStatus) ) //Check the
status again.
            break;
        if (dwOldCheckPoint >= ssStatus.dwCheckPoint)
        //Break if the checkpoint has not been incremented.
            break;
    }
    if (ssStatus.dwCurrentState == SERVICE_RUNNING)
        goto StopWWWBErr;

    CloseServiceHandle(schService);
    return TRUE;

StopWWWBErr:
CloseServiceHandle(schService);
return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0, PM_REMOVE) )
    {
        TranslateMessage(&msg);
}

```

```

        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

```

install.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//

#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TCDCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108

#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003
#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB 1021
#define IDC_ODBC 1022
#define IDC_CONNECT_POOL 1023
#define ED_USER_CONNECT_DELAY_TIME 1024

// Next default values for new objects
//



```

install.rc

```

//Microsoft Developer Studio generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
///////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

///////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS
/////////////////////////////

```

```

// English (U.S.) resources
#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#ifndef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif ///_WIN32

///////////////////////////////
//
// Dialog
//
IDD_DIALOG1 DIALOGEX 0, 0, 219, 351
STYLE DS_MODALFRAME | DS_CENTER | WS_MINIMIZEBOX | WS_POPUP | WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT    ED_THREADS,164,45,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT    ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT    ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    CONTROL    "None",IDC_TM_NONE,"Button",BS_AUTORADIOBUTTON |
    WS_GROUP | WS_TABSTOP,43,100,33,10
    CONTROL    "COM",IDC_TM_MTS,"Button",BS_AUTORADIOBUTTON |
    WS_TABSTOP,43,113,32,10
    CONTROL    "TUXEDO",IDC_TM_TUXEDO,"Button",BS_AUTORADIOBUTTON |
    WS_TABSTOP,106,100,46,10
    CONTROL    "ENCINA",IDC_TM_ENCINA,"Button",BS_AUTORADIOBUTTON |
    WS_DISABLED | WS_TABSTOP,106,113,43,10
    EDITTEXT    ED_DB_SERVER,131,152,67,12,ES_AUTOHSCROLL
    EDITTEXT    ED_DB_USER_ID,131,165,67,12,ES_AUTOHSCROLL
    EDITTEXT    ED_DB_PASSWORD,131,178,67,12,ES_AUTOHSCROLL
    CONTROL    "DBLIB",IDC_DBLIB,"Button",BS_AUTORADIOBUTTON | WS_GROUP |
    WS_TABSTOP,45,219,39,12
    CONTROL    "ODBC",IDC_ODBC,"Button",BS_AUTORADIOBUTTON | WS_TABSTOP,
    91,219,39,12
    EDITTEXT    ED_IIS_MAX_THREAD_POOL_LIMIT,164,263,34,12,ES_RIGHT |
    ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT    ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,164,277,34,12,ES_RIGHT |
    ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT    ED_IIS_THREAD_TIMEOUT,164,291,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT    ED_IIS_LISTEN_BACKLOG,164,305,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    DEFPUSHBUTTON OK,1DOK,53,331,50,14
    PUSHBUTTON Cancel,1DCANCEL,119,331,50,14
    EDITTEXT    IDC_PATH,106,26,91,13,ES_AUTOHSCROLL | ES_READONLY
    LTEXT      "Number of Delivery Threads:",IDC_STATIC,35,45,115,12
    LTEXT      "Max Number of Connections:",IDC_STATIC,35,73,115,12
    RTEXT      "Version 4.11",IDC_VERSION,120,4,89,9
    LTEXT      "IIS Max Thread Pool Limit:",IDC_STATIC,36,263,115,12
    LTEXT      "Web Service Backlog Queue Size:",IDC_STATIC,36,277,115,
    12
    LTEXT      "IIS Thread Timeout (seconds):",IDC_STATIC,36,291,115,12
    LTEXT      "IIS Listen Backlog:",IDC_STATIC,36,307,115,10
    GROUPBOX   Database Interface, IDC_STATIC, 35, 208, 163, 27, WS_GROUP
    LTEXT      "Installation directory:",IDC_STATIC,35,29,71,10
    GROUPBOX   Transaction Monitor, IDC_STATIC, 33, 90, 165, 37

```

```

LTEXT      "Server Name:",IDC_STATIC,35,155,56,8
LTEXT      "User ID:",IDC_STATIC,35,168,60,8
LTEXT      "User Password:",IDC_STATIC,35,181,83,8
LTEXT      "Database Name:",IDC_STATIC,35,194,54,8
GROUPBOX   "SQL Server Connection Properties",IDC_STATIC,22,139,187,
          102
GROUPBOX   "Web Client Properties",IDC_STATIC,22,15,187,118
GROUPBOX   "IIS Settings",IDC_STATIC,22,247,187,79
LTEXT      "Max Pending Deliveries:",IDC_STATIC,35,59,115,12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFOREGROUND | DS_3DLOOK | DS_CENTER | WS_POPUP | WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON  "OK",IDOK,33,45,50,9
    CTEXT      "HTML TPC-C Installation Successfull",IDC_RESULTS,7,22,
              102,18,0,WS_EX_CLIENTEDGE
    ICON       IDI_ICON2, IDC_STATIC,50,7,18,20,SS_REALSIZEIMAGE,
              WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG DISCARDABLE 0, 0, 91, 40
STYLE DS_SYSMODAL | DS_MODALFRAME | DS_3DLOOK | DS_CENTER | WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL     "Progress1",IDC_PROGRESS1,"msctls_progress32",WS_BORDER,
              7,20,77,13
    CTEXT      "Static",IDC_STATUS,7,7,77,12,SS_SUNKEN
END

IDD_DIALOG4 DIALOG DISCARDABLE 0, 0, 291, 202
STYLE DS_MODALFRAME | DS_CENTER | WS_POPUP | WS_CAPTION | WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT     IDC_LICENSE,7,7,271,167,ES_MULTILINE | ES_AUTOVSCROLL |
                  ES_AUTOHSCROLL | ES_READONLY | WS_VSCROLL | WS_HSCROLL
    DEFPUSHBUTTON "I &Agree",IDOK,87,181,50,14
    PUSHBUTTON   "&Cancel",IDCANCEL,153,181,50,14
END

///////////////////////////////
// DESIGNINFO
//

#ifndef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 345
    END
#endif // APSTUDIO_INVOKED

IDD_DIALOG2, DIALOG
BEGIN
    LEFTMARGIN, 7
    RIGHTMARGIN, 109
    TOPMARGIN, 7
    BOTTOMMARGIN, 54
END

IDD_DIALOG3, DIALOG
BEGIN
    LEFTMARGIN, 7
    RIGHTMARGIN, 84
    TOPMARGIN, 7
    BOTTOMMARGIN, 33
END

IDD_DIALOG4, DIALOG
BEGIN
    LEFTMARGIN, 7
    RIGHTMARGIN, 278
    TOPMARGIN, 7
    BOTTOMMARGIN, 195
END

#endif // APSTUDIO_INVOKED

#ifndef APSTUDIO_INVOKED
///////////////////////////////
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include ""afxres.h""\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

///////////////////////////////
// Icon
//
// Icon with lowest ID value placed first to ensure application icon
// remains consistent on all systems.
IDI_ICON1      ICON      DISCARDABLE      "icon1.ico"
IDI_ICON2      ICON      DISCARDABLE      "icon2.ico"

```

```

//////////TPCCDLL
// TPCCDLL
//
IDR_TPCCDLL      TPCCDLL DISCARDABLE    "..\\..\\isapi_dll\\bin\\tpcc.dll"
#ifndef _MAC
////////// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,20,0
PRODUCTVERSION 0,4,20,0
FILEFLAGSMASK 0x3fL
#endif
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904b0"
BEGIN
VALUE "Comments", "TPC-C Web Client Installer\0"
VALUE "CompanyName", "Microsoft\0"
VALUE "FileDescription", "install\0"
VALUE "FileVersion", "0, 4, 20, 0\0"
VALUE "InternalName", "install\0"
VALUE "LegalCopyright", "Copyright © 1999\0"
VALUE "OriginalFilename", "install.exe\0"
VALUE "ProductName", "Microsoft install\0"
VALUE "ProductVersion", "0, 4, 20, 0\0"
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200
END
END
#endif // !_MAC

////////// LICENSE
//
IDR_LICENSE      LICENSE DISCARDABLE    "license.txt"
////////// DBLIB_DLL
// DBLIB_DLL

```

```

IDR_DBLIB_DLL      DBLIB_DLL DISCARDABLE
"..\\..\\db_dblib_dll\\bin\\tpcc_dblib.dll"
////////// ODBC_DLL
//
IDR_ODBC_DLL      ODBC_DLL DISCARDABLE
"..\\..\\db_odbc_dll\\bin\\tpcc_odbc.dll"
////////// TUXEDO_APP
//
IDR_TUXEDO_APP    TUXEDO_APP DISCARDABLE  "...\\..\\tuxapp\\bin\\tuxapp.exe"
////////// TUXEDO_DLL
//
IDR_TUXEDO_DLL    TUXEDO_DLL DISCARDABLE
"..\\..\\tm_tuxedo_dll\\bin\\tpcc_tuxedo.dll"
////////// COM_DLL
//
IDR_COM_DLL        COM_DLL DISCARDABLE
"..\\..\\tm_com_dll\\bin\\tpcc_com.dll"
////////// COM_PS_DLL
//
IDR_COMPS_DLL     COM_PS_DLL DISCARDABLE
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.dll"
////////// COM_ALL_DLL
//
IDR_COMALL_DLL    COM_ALL_DLL DISCARDABLE
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.dll"
////////// COM_TYPLIB
//
IDR_COMTYPLIB_DLL COM_TYPLIB DISCARDABLE
"..\\..\\tpcc_com_all\\src\\tpcc_com_all.tlb"
#endif // English (U.S.) resources
//////////

```

```

#ifndef APSTUDIO_INVOKED
///////////////
// Generated from the TEXTINCLUDE 3 resource.
//

///////////////
#endif // not APSTUDIO_INVOKED

```

install_com.cpp

```

/*      FILE:           INSTALL_COM.CPP
*      Microsoft TPC-C Kit Ver. 4.20.000
*      Copyright Microsoft, 1999
*
*      All Rights Reserved
*
*      not audited
*
*      PURPOSE:  installation code for COM application for TPC-C Web Kit
*      Contact:  Charles Levine (clevine@microsoft.com)
*
*      Change history:
*              4.20.000 - first version
*/
#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp = NULL;
    ICatalogCollection* pCatalogCollectionCo = NULL;
    ICatalogCollection* pCatalogCollectionItf = NULL;
    ICatalogCollection* pCatalogCollectionMethod = NULL;

    ICatalogObject* pCatalogObjectApp = NULL;
    ICatalogObject* pCatalogObjectCo = NULL;
    ICatalogObject* pCatalogObjectItf = NULL;
    ICatalogObject* pCatalogObjectMethod = NULL;

    _bstr_t
    bstrTemp4;
    _bstr_t
    _variant_t
    long
    lCountItf, lCountMethod;
    bool
    bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);
}

```

```

HRESULT hr = CoCreateInstance(CLSID_COMAdminCatalog,
NULL,
CLSCCTX_INPROC_SERVER,
IID_ICOMAdminCatalog,
(void**) &pCOMAdminCat);

if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Applications";

// Attempt to connect to "Applications" in the Catalog
hr = pCOMAdminCat->GetCollection(bstrTemp,
(IDispatch**) &pCatalogCollectionApp);
if (!SUCCEEDED(hr)) goto Error;

// Attempt to load the "Applications" collection
hr = pCatalogCollectionApp->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionApp->get_Count(&lCount);
if (!SUCCEEDED(hr)) goto Error;

// iterate through applications to delete existing "TPC-C" application (if
any)
while (lCount > 0)
{
    hr = pCatalogCollectionApp->get_Item(lCount - 1, (IDispatch**) &pCatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogObjectApp->get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    if (wcscmp(vTmp.bstrVal, L"TPC-C"))
    {
        lCount--;
        continue;
    }
    else
    {
        hr = pCatalogCollectionApp->Remove(lCount - 1);
        if (!SUCCEEDED(hr)) goto Error;
        break;
    }
}

hr = pCatalogCollectionApp->SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

// add the new application
hr = pCatalogCollectionApp->Add((IDispatch**) &pCatalogObjectApp);
if (!SUCCEEDED(hr)) goto Error;

// set properties
bstrTemp = "Name";
vTmp = "TPC-C";
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);

```

```

if (!SUCCEEDED(hr)) goto Error;

// set as a library (in process) application
bstrTemp = "Activation";
lActProp = COMAdminActivationInproc;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set security level to process
bstrTemp = "AccessChecksLevel";
lActProp = COMAdminAccessChecksApplicationLevel;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// save key to get the Components collection later
hr = pCatalogObjectApp->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

// save changes (app creation) so component installation will work
hr = pCatalogCollectionApp->SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectApp->Release();
pCatalogObjectApp = NULL;

bstrTemp = "TPC-C"; // app name
bstrTemp2 = bstrDllPath + "tpcc_com_all.dll"; //
DLL
bstrTemp3 = bstrDllPath + "tpcc_com_all.tlb"; //
type library (TLB)
bstrTemp4 = bstrDllPath + "tpcc_com_ps.dll"; //
proxy/stub dll

hr = pCOMAdminCat->InstallComponent(bstrTemp,
                                      bstrTemp2,
                                      bstrTemp3,
                                      bstrTemp4);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Components";
hr = pCatalogCollectionApp->GetCollection(bstrTemp, vKey, (IDispatch**) &pCatalogCollectionCo);
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->get_Count(&lCountCo);
if (!SUCCEEDED(hr)) goto Error;

// iterate through components in application and set the properties
while (lCountCo > 0)
{
    hr = pCatalogCollectionCo->get_Item(lCountCo - 1, (IDispatch**) &pCatalogObjectCo);
    if (!SUCCEEDED(hr)) goto Error;
}

// used for debugging (view the name)
hr = pCatalogObjectCo->get_Name(&vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "ConstructionEnabled";
bTmp = TRUE;
vTmp = bTmp;
hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "ConstructorString";
bstrTemp2 = "dummy string (do not remove)";
vTmp = bstrTemp2;
hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "JustInTimeActivation";
bTmp = TRUE;
vTmp = bTmp;
hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "MaxPoolSize";
vTmp.Clear(); // clear variant so it isn't stored as a
bool (_variant_t feature)
{
    vTmp = (long)30;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ObjectPoolingEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // save key to get the InterfacesForComponent collection
    hr = pCatalogObjectCo->get_Key(&vKey);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "InterfacesForComponent";
    hr = pCatalogCollectionCo->GetCollection(bstrTemp, vKey,
                                                (IDispatch**) &pCatalogCollectionItf);
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionItf->Populate();
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionItf->get_Count(&lCountItf);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through interfaces in component
    while (lCountItf > 0)
    {
        hr = pCatalogCollectionItf->get_Item(lCountItf - 1,
                                               (IDispatch**) &pCatalogObjectItf);
        if (!SUCCEEDED(hr)) goto Error;

        // save key to get the MethodsForInterface collection
        hr = pCatalogObjectItf->get_Key(&vKey);
        if (!SUCCEEDED(hr)) goto Error;
    }
}

```

```

        bstrTemp = "MethodsForInterface";
        hr = pCatalogCollectionItf->GetCollection(bstrTemp,
vKey, (IDispatch**) &pCatalogCollectionMethod);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionMethod->Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionMethod-
>get_Count(&lCountMethod);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through methods of interface
        while (lCountMethod > 0)
        {
            hr = pCatalogCollectionMethod-
>get_Item(lCountMethod - 1, (IDispatch**) &pCatalogObjectMethod);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "AutoComplete";
            bTmp = TRUE;
            vTmp = bTmp;
            hr = pCatalogObjectMethod-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            pCatalogObjectMethod->Release();
            pCatalogObjectMethod = NULL;

            lCountMethod--;
        }

        // save changes
        hr = pCatalogCollectionMethod->SaveChanges(&lActProp);
        if (!SUCCEEDED(hr)) goto Error;

        pCatalogObjectItf->Release();
        pCatalogObjectItf = NULL;

        lCountItf--;
    }

    pCatalogObjectCo->Release();
    pCatalogObjectCo = NULL;

    lCountCo--;
}

// save changes
hr = pCatalogCollectionCo->SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogCollectionApp->Release();
pCatalogCollectionApp = NULL;

pCatalogCollectionCo->Release();
pCatalogCollectionCo = NULL;

pCatalogCollectionItf->Release();
pCatalogCollectionItf = NULL;

```

```

pCatalogCollectionMethod->Release();
pCatalogCollectionMethod = NULL;

Error:
CoUninitialize();

if (!SUCCEEDED(hr))
{
    LPTSTR lpBuf;
    DWORD dwRes = FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER | 
FORMAT_MESSAGE_FROM_SYSTEM,
NULL,
hr,
MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),
(LPTSTR) &lpBuf,
0,
NULL);
_tprintf(_T("Error adding components. HRESULT: 0x%lx\n%s"), hr,
lpBuf);
return TRUE;
}
else
return FALSE;
}



---



## isapi_dll.dsp



```

Microsoft Developer Studio Project File - Name="isapi_dll" - Package Owner=<4>
Microsoft Developer Studio Generated Build File, Format Version 6.00
** DO NOT EDIT **

TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=isapi_dll - Win32 IceCAP
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "isapi_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "isapi_dll.mak" CFG="isapi_dll - Win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "isapi_dll - Win32 Release" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE "isapi_dll - Win32 Debug" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE "isapi_dll - Win32 IceCAP" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE

Begin Project
PROP AllowPerConfigDependencies 0
PROP Scc_ProjName ""

```


```

```

# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF    "$(CFG)" == "isapi_dll - Win32 Release"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "NDEBUG" /D "WIN32" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
adapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbc32.lib
/nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 ..\common\txnlog\lib\release\runtime.lib
..\common\txnlog\lib\release\spinlock.lib ..\common\txnlog\lib\release\error.lib
..\common\txnlog\lib\release\txnlog.lib wsck32.lib kernel32.lib user32.lib
gdi32.lib winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbc32.lib odbc32.lib /nologo /subsystem:windows /dll /machine:I386
/nodfaultlib:"LIBCMT" /out:".bin\tpcc.dll"
# SUBTRACT LINK32 /nodfaultlib

!ELSEIF  "$(CFG)" == "isapi_dll - Win32 Debug"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/YX /FD /c
# ADD CPP /nologo /MDd /W3 /GX /ZI /Od /D "_DEBUG" /D "WIN32" /D "_WINDOWS" /FR /YX
/FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
adapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbc32.lib
/nologo /subsystem:windows /dll /debug /machine:I386 /out:".bin\tpcc.dll"
/pdbtype:sept
# SUBTRACT BASE LINK32 /profile /pdb:none
# ADD LINK32 icap.lib ..\common\txnlog\lib\release\runtime.lib
..\common\txnlog\lib\release\spinlock.lib ..\common\txnlog\lib\release\error.lib
..\common\txnlog\lib\release\txnlog.lib wsck32.lib kernel32.lib user32.lib
gdi32.lib winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbc32.lib odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".bin\tpcc.dll" /pdbtype:sept
# SUBTRACT LINK32 /profile /pdb:none /map

!ENDIF

# Begin Target

# Name "isapi_dll - Win32 Release"
# Name "isapi_dll - Win32 Debug"
# Name "isapi_dll - Win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.cpp, *.def, *.rc"
# Begin Source File

```

```

SOURCE=.\src\tpcc.cpp
# End Source File
# Begin Source File

SOURCE=.\src\tpcc.def
# End Source File
# Begin Source File

SOURCE=.\src\tpcc.rc
# End Source File
# End Group
# Begin Group "Header Files"

# PROP Default_Filter "*.h, *.hpp"
# Begin Source File

SOURCE=..\common\src\error.h
# End Source File
# Begin Source File

SOURCE=..\common\src\ReadRegistry.h
# End Source File
# Begin Source File

SOURCE=.\src\tpcc.h
# End Source File
# Begin Source File

SOURCE=..\db_dbllib_dll\src\tpcc_dbllib.h
# End Source File
# Begin Source File

SOURCE=..\db_odbc_dll\src\tpcc_odbc.h
# End Source File
# Begin Source File

SOURCE=..\tm_tuxedo_dll\src\tpcc_tux.h
# End Source File
# Begin Source File

SOURCE=..\common\src\trans.h
# End Source File
# Begin Source File

SOURCE=..\common\src\txn_base.h
# End Source File
# End Group
# End Target
# End Project

```

rftime.h

```

/* FILE: rftime.h : header file
 * Copyright 1997 Microsoft Corp., All rights reserved.
 *
 * Source code licensed to Tandem Computers for Internal
 * use only. Redistribution of source or object files or
 * any derivative works is prohibited. By agreement, this
 * notice may not be removed.
 *
 * Authors: Charles Levine, Philip Durr

```

```

*
* Microsoft Corp.
*
//FILE: RTETIME.H

#define MAX_JULIAN_TIME          0x7FFFFFFFFFFFFF
#define JULIAN_TIME __int64
#define TC_TIME                   DWORD
extern "C"
{
BOOL           InitJulianTime(LPSYSTEMTIME lpInitTime);
JULIAN_TIME    GetJulianTime(void);
DWORD          MyTickCount(void);
void           GetJulianAndTC(JULIAN_TIME *pJulian, DWORD *pTC);
JULIAN_TIME   ConvertTo64BitTime(int iYear, int iMonth, int iDay, int iHour,
int iMinute, int iSecond);
JULIAN_TIME   Get64BitTime(LPSYSTEMTIME lpInitTime);
int            JulianDay( int yr, int mm, int dd );
void           JulianToTime(JULIAN_TIME julianTS, int* yr, int* mm, int* dd,
int *hh, int *mi, int *ss );
void           JulianToCalendar( int day, int* yr, int* mm, int* dd );
}
```

spinlock.h

```

/*
 * FILE: SPINLOCK.H
 *
 * Copyright 1997 Microsoft Corp., All rights reserved.
 *
 * Source code licensed to Tandem Computers for Internal
 * use only. Redistribution of source or object files or
 * any derivative works is prohibited. By agreement, this
 * notice may not be removed.
 *
 * Authors: Mike Parkes, Charles Levine, Philip Durr
 *          Microsoft Corp.
 */

#ifndef _INC_Spinlock
const LONG LockClosed      = 1;
const LONG LockOpen        = 0;

/*********************************************
 *
 * Spinlock and Semaphore locking.
 *
 * This class provides a very conservative locking scheme.
 * The assumption behind the code is that locks will be
 * held for a very short time. When a lock is taken a memory
 * location is exchanged. All other threads that want this
 * lock wait by spinning and sometimes sleeping on a semaphore
 * until it becomes free again. The only other choice is not
 * to wait at all and move on to do something else. This
 * module should normally be used in conjunction with cache
 * aligned memory to minimize cache line misses.
 *
*****************************************/
class Spinlock
{
```

```

// Private data.
HANDLE           Semaphore;
volatile LONG     m_Spinlock;
volatile LONG     Waiting;

#ifndef _DEBUG
    // Counters for debugging builds.
    volatile LONG   TotalLocks;
    volatile LONG   TotalSleeps;
    volatile LONG   TotalSpins;
    volatile LONG   TotalWaits;
#endif

public:
    // Public functions.

    Spinlock( void );

    inline BOOL ClaimLock( BOOL Wait = TRUE );
    inline void ReleaseLock( void );
    ~Spinlock( void );
    // Disabled operations.
    Spinlock( const Spinlock & Copy );
    void operator=( const Spinlock & Copy );

private:
    // Private functions.
    inline BOOL ClaimSpinlock( volatile LONG *sl );
    void WaitForLock( void );
    void WakeAllSleepers( void );
};

/*********************************************
*   A guaranteed atomic exchange.
*   An attempt is made to claim the Spinlock.  This action is
*   guaranteed to be atomic.
*********************************************/

inline BOOL Spinlock::ClaimSpinlock( volatile LONG *Spinlock )
{
    #ifdef _DEBUG
        InterlockedIncrement( (LPLONG) & TotalLocks );
    #endif
    return ( ((*Spinlock) == LockOpen) && (InterlockedExchange(
(LPLONG)Spinlock, LockClosed ) == LockOpen) );
}

/*********************************************
*   Claim the Spinlock.
*   Claim the lock if available else wait or exit.
*********************************************/

inline BOOL Spinlock::ClaimLock( BOOL Wait )
{
    if ( ! ClaimSpinlock( (volatile LONG*) & m_Spinlock ) )
    {
        if ( Wait )

```

```

            WaitForLock();
            return Wait;
        }
        return TRUE;
    }

/*********************************************
*   Release the Spinlock.
*   Release the lock and if needed wakeup any sleepers.
********************************************/

inline void Spinlock::ReleaseLock( void )
{
    m_Spinlock = LockOpen;
    if ( Waiting > 0 )
        WakeAllSleepers();
}

#define _INC_Spinlock

#endif

```

tm_com_dll.dsp

```

# Microsoft Developer Studio Project File - Name="tm_com_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=tm_com_dll - Win32 Debug
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tm_com_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tm_com_dll.mak" CFG="tm_com_dll - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tm_com_dll - Win32 Release" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE "tm_com_dll - Win32 Debug" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF   "$(CFG)" == "tm_com_dll - Win32 Release"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0

```

```

# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD
/c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /dll /machine:I386 /out:".\\bin\\tpcc_com.dll"

!ELSEIF "$(CFG)" == "tm_com_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/YX /FD /c
# ADD CPP /nologo /MDd /W3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX
/FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /dll /debug /machine:I386 /pdptype:sept
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /dll /debug /machine:I386 /out:".\\bin\\tpcc_com.dll"
/pdptype:sept

!ENDIF

# Begin Target

```

```

# Name "tm_com_dll - Win32 Release"
# Name "tm_com_dll - Win32 Debug"
# Begin Source File

SOURCE=.\\src\\tpcc_com.cpp
# End Source File
# Begin Source File

SOURCE=.\\src\\tpcc_com.h
# End Source File
# End Target
# End Project

```

tpcc.cpp

```

/*           FILE:          TPCC.C           Microsoft TPC-C Kit Ver. 4.20.000
*           *           Copyright Microsoft, 1999
*           *           All Rights Reserved
*           *           Version 4.10.000 audited by Richard Gimarc,
*           *           Performance Metrics, 3/17/99
*           *           PURPOSE: Main module for TPCC.DLL which is an ISAPI service dll.
*           *           Contact: Charles Levine (clevine@microsoft.com)
*           *
*           *           Change history:
*           *           4.20.000 - reworked error handling; added options for COM and
Encina txn monitors
*/
#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stدارg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqlytypes.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

#include "..\\..\\common\\src\\trans.h" //tpckit transaction header
contains definitions of structures specific to TPC-C
#include "..\\..\\common\\src\\error.h"
#include "..\\..\\common\\src\\txnl_base.h"
#include "..\\..\\common\\src\\ReadRegistry.h"

#include "..\\..\\common\\txnl\\include\\rtetime.h"
#include "..\\..\\common\\txnl\\include\\spinlock.h"
#include "..\\..\\common\\txnl\\include\\txnl.h"

// Database layer includes

```

```

#include "../..\db_dblib_dll\src\tpcc_dblib.h"           // DBLIB implementation
of TPC-C txns                                         // ODBC implementation
of TPC-C txns

// Txn monitor layer includes
#include "../..\tm_com_dll\src\tpcc_com.h"             // COM
Services implementation on TPC-C txns
#include "../..\tm_tuxedo_dll\src\tpcc_tux.h"            // interface to Tuxedo
libraries
#include "../..\tm_encina_dll\src\tpcc_enc.h"            // interface to Encina
libraries

#include "httpext.h"                                     //ISAPI DLL information
header
#include "tpcc.h"                                       //this dlls specific
structure, value e.t. header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version level of this web client
interface.
// The RTE must be synchronized with the interface level on login, otherwise the
login
// will fail. This is a sanity check to catch problems resulting from mismatched
versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "410"

static CRITICAL_SECTION TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_TUXEDO *pCTPCC_TUXEDO_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_post_init;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog *txnDelilog = NULL;
//used to log delivery transaction information

HANDLE hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE hDoneEvent = INVALID_HANDLE_VALUE;
HANDLE *pDeliHandles = NULL;

```

```

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD dwNumDeliveryThreads = 4;                                //critical
CRITICAL_SECTION DelBuffCriticalSection;                         //critical
section for delivery transactions cache
DELIVERY_TRANSACTION *pDelBuff = NULL;
DWORD dwDelBuffSize = 100;                                     // size of circular buffer for delivery txns
DWORD dwDelBuffFreeCount = 0;                                    // number of buffers free
DWORD dwDelBuffBusyIndex = 0;                                   // index position of entry waiting to be delivered
DWORD dwDelBuffFreeIndex = 0;                                   // index position of unused entry

#include "../..\common\src\ReadRegistry.cpp"

/* FUNCTION: DllMain
*
* PURPOSE: This function is the entry point for the DLL. This
implementation is based on the
* fact that DLL_PROCESS_ATTACH is only called from the
inet service once.
*
* ARGUMENTS: HANDLE hModule module handle
*           DWORD ul_reason_for_call reason for
call
*           LPVOID lpReserved
*           reserved for future use
*
* RETURNS:    BOOL FALSE
*             errors occurred in initialization
*             TRUE
*             DLL successfully initialized
*/
BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID lpReserved)
{
    DWORD i;
    char szEvent[LEN_ERR_STRING] = "\0";
    char szLogFile[128];
    char szDllName[128];

    // debugging...
    // DebugBreak();

    try
    {
        switch( ul_reason_for_call )
        {
            case DLL_PROCESS_ATTACH:
                {
                    DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;
                    GetComputerName(szMyComputerName,
&dwSize);
                    szMyComputerName[dwSize] = 0;
                }
                DisableThreadLibraryCalls((HMODULE)hModule);
    
```

```

InitializeCriticalSection(&TermCriticalSection);

        if ( ReadTPCCRegistrySettings( &Reg ) )
            throw new CWEBCNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

        dwDelBuffSize = min(
Reg.dwMaxPendingDeliveries, 10000 ); // min with 10000 as a sanity constraint
dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with 100 as a sanity constraint

        TermInit();

        // load DLL for txn monitor
        if (Reg.eTxnMon == TUXEDO)
        {
            strcpy( szDllName, Reg.szPath );
            strcat( szDllName,
"tpcc_tuxedo.dll" );
            hLibInstanceTm = LoadLibrary(
szDllName );

            if (hLibInstanceTm == NULL)
                throw new CWEBCNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

            // get function pointer to wrapper
            for class constructor
                pCTPCC_TUXEDO_new =
(TYPE_CTPCC_TUXEDO*) GetProcAddress(hLibInstanceTm,"CTPCC_TUXEDO_new");
                if (pCTPCC_TUXEDO_new == NULL)
                    throw new CWEBCNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
            }
            else if (Reg.eTxnMon == ENCINA)
            {
                strcpy( szDllName, Reg.szPath );
                strcat( szDllName,
"tpcc_encina.dll" );
                hLibInstanceTm = LoadLibrary(
szDllName );

                if (hLibInstanceTm == NULL)
                    throw new CWEBCNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
            // get function pointer to wrapper
            for class constructor
                pCTPCC_ENCINA_new =
(TYPE_CTPCC_ENCINA*) GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_new");
                pCTPCC_ENCINA_post_init =
(TYPE_CTPCC_ENCINA*) GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_post_init");
                if (pCTPCC_ENCINA_new == NULL)
                    throw new CWEBCNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
            }
            else if (Reg.eTxnMon == COM)
            {
                strcpy( szDllName, Reg.szPath );
                strcat( szDllName,
"tpcc_com.dll" );
                hLibInstanceTm = LoadLibrary(
szDllName );
                if (hLibInstanceTm == NULL)

```

```

                    throw new CWEBCNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                    // get function pointer to wrapper
                    for class constructor
                        pCTPCC_COM_new = (TYPE_CTPCC_COM*)
GetProcAddress(hLibInstanceTm,"CTPCC_COM_new");
                        if (pCTPCC_COM_new == NULL)
                            throw new CWEBCNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                }

                // load DLL for database connection
                if ((Reg.eTxnMon == None) ||
(dwNumDeliveryThreads > 0))
                {
                    if (Reg.eDB_Protocol == DBLIB)
                    {
                        strcpy( szDllName,
"tpcc_dblib.dll" );
                        hLibInstanceDb =
LoadLibrary( szDllName );
                        if (hLibInstanceDb == NULL)
                            throw new
CWEBCNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );
                    }
                    // get function pointer
                    to wrapper for class constructor
                        pCTPCC_DBLIB_new =
(TYPE_CTPCC_DBLIB*) GetProcAddress(hLibInstanceDb,"CTPCC_DBLIB_new");
                        if (pCTPCC_DBLIB_new == NULL)
                            throw new
CWEBCNT_ERR( ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                    else if (Reg.eDB_Protocol == ODBC)
                    {
                        strcpy( szDllName,
"tpcc_odbc.dll" );
                        hLibInstanceDb =
LoadLibrary( szDllName );
                        if (hLibInstanceDb == NULL)
                            throw new
CWEBCNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );
                    }
                    // get function pointer
                    to wrapper for class constructor
                        pCTPCC_ODBC_new =
(TYPE_CTPCC_ODBC*) GetProcAddress(hLibInstanceDb,"CTPCC_ODBC_new");
                        if (pCTPCC_ODBC_new == NULL)
                            throw new
CWEBCNT_ERR( ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                }
            if (dwNumDeliveryThreads)

```

```

{
    // for deferred delivery txns:
    hDoneEvent = CreateEvent( NULL,
TRUE /* manual reset */, FALSE /* initially not signalled */, NULL );

    InitializeCriticalSection(&DelBuffCriticalSection);
        hWorkerSemaphore =
CreateSemaphore( NULL, 0, dwDelBuffSize, NULL );
            dwDelBuffFreeCount =
dwDelBuffSize;

            InitJulianTime(NULL);

            // create unique log file name
based on delilog-yyyymmdd-hhmm.log
            SYSTEMTIME Time;
GetLocalTime( &Time );
wsprintf( szLogFile, "%sdelivery-
%2.2d%2.2d%2.2d-%2.2d%2.2d.log",
Time.wYear % 100, Time.wMonth, Time.wDay, Time.wHour, Time.wMinute );
txnDelilog = new
CTxnLog(szLogFile, TXN_LOG_WRITE);

            //write event into txn log for
START
            txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName, sizeof(szMyComputerName));

            // allocate structures for
delivery buffers and thread mgmt
HANDLE(dwNumDeliveryThreads);
pDeliHandles = new
pDelBuff = new
DELIVERY_TRANSACTION(dwDelBuffSize);
// launch DeliveryWorkerThread to
perform actual delivery txns
for(i=0; i<dwNumDeliveryThreads;
i++)
{
    pDeliHandles[i] =
(HANDLE) _beginthread( DeliveryWorkerThread, 0, NULL );
        if (pDeliHandles[i] ==
INVALID_HANDLE_VALUE)
            throw new
CWEBCLNT_ERR( ERR_DELIVERY_THREAD_FAILED );
}
break;

case DLL_PROCESS_DETACH:
    if (dwNumDeliveryThreads)
    {
        if (txnDelilog != NULL)
            //write event into txn
log for STOP
            txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName, sizeof(szMyComputerName));
                // This will do a clean
shutdown of the delivery log file

```

```

CTxnLog
*txnDelilogLocal = txnDelilog;
txnDelilog= NULL;
delete txnDelilogLocal;
}

delete [] pDeliHandles;
delete [] pDelBuff;

CloseHandle( hWorkerSemaphore );
CloseHandle( hDoneEvent );

DeleteCriticalSection(&DelBuffCriticalSection);
}

DeleteCriticalSection(&TermCriticalSection);

if (hLibInstanceTm != NULL)
    FreeLibrary( hLibInstanceTm );
hLibInstanceTm = NULL;

if (hLibInstanceDb != NULL)
    FreeLibrary( hLibInstanceDb );
hLibInstanceDb = NULL;

Sleep(500);
break;

default:
/* nothing */
}

catch (CBaseErr *e)
{
    WriteMessageToEventLog( e->ErrorText() );
    delete e;
    TerminateExtension(0);
    return FALSE;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled exception. DLL could not
load."));
    TerminateExtension(0);
    return FALSE;
}

return TRUE;
}

/* FUNCTION: GetExtensionVersion
*
* PURPOSE:      This function is called by the inet service when the DLL is
first loaded.
*
* ARGUMENTS:      HSE_VERSION_INFO      *pVer      passed in structure in which to
place expected version number.
*
* RETURNS:          TRUE      inet service expected return value.
*/
BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO *pVer)


```

```

{
    pVer->dwExtensionVersion = MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpy(pVer->lpszExtensionDesc, "TPC-C Server.");
    HSE_MAX_EXT_DLL_NAME_LEN);

    // TODO: why do we need this here instead of in the DLL attach?
    if (Reg.eTxnMon == ENCINA)
        pCTPCC_ENCINA_post_init();

    return TRUE;
}

/* FUNCTION: TerminateExtension
 *
 * PURPOSE: This function is called by the inet service when the DLL is
 * about to be unloaded.
 *          Release all resources in anticipation of being
 * unloaded.
 *
 * RETURNS: TRUE      inet service expected return value.
 */

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0; i<dwNumDeliveryThreads; i++)
            WaitForSingleObject( pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
 *
 * PURPOSE: This function is the main entry point for the TPCC DLL. The
 * internet service      calls this function passing in the http string.
 *
 * ARGUMENTS: EXTENSION_CONTROL_BLOCK      *pECB      structure pointer to
 * passed in internet
 *
 *           service information.
 *
 * RETURNS:     DWORD      HSE_STATUS_SUCCESS
 *              connection can be dropped if error
 *
 *              HSE_STATUS_SUCCESS_AND_KEEP_CONN      keep connect valid comment sent
 *
 * COMMENTS:    None
 */
DWORD WINAPI HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int             iCmd, FormId, TermId, iSyncId;
    char            szBuffer[4096];
    int             lpbSize;
    static char     szHeader[] = "200 Ok";
}

```

```

        DWORD
        strlen(szHeader)           dwSize = 6;           // initial value is
        char                   szHeader1[4096];

#ifndef ICECAP
        StartCAP();
#endif

try
{
    //process http query
    ProcessQueryString(pECB, &iCmd, &FormId, &TermId, &iSyncId);

    if (TermId != 0)
    {
        if ( TermId < 0 || TermId >= Term.iNumEntries ||
        Term.pClientData[TermId].iNextFree != -1 )
        {
            // debugging...
            char szTmp[128];
            wsprintf( szTmp, "Invalid term ID; TermId = %d", TermId );
            WriteMessageToEventLog( szTmp );
            throw new CWEBCNLT_ERR( ERR_INVALID_TERMID );
        }
        //must have a valid syncid here since termid is valid
        if (iSyncId != Term.pClientData[TermId].iSyncId)
            throw new CWEBCNLT_ERR(
ERR_INVALID_SYNC_CONNECTION );

        //set use time
        Term.pClientData[TermId].iTickCount = GetTickCount();
    }

    switch(iCmd)
    {
        case 0:
            WelcomeForm(pECB, szBuffer);
            break;
        case 1:
            switch( FormId )
            {
                case WELCOME_FORM:
                case MAIN_MENU_FORM:
                    break;
                case NEW_ORDER_FORM:
                    ProcessNewOrderForm(pECB, TermId,
szBuffer);
                    break;
                case PAYMENT_FORM:
                    ProcessPaymentForm(pECB, TermId,
szBuffer);
                    break;
                case DELIVERY_FORM:
                    ProcessDeliveryForm(pECB, TermId,
szBuffer);
                    break;
                case ORDER_STATUS_FORM:

```

```

TermId, szBuffer);
ProcessOrderStatusForm(pECB,
break;
case STOCK_LEVEL_FORM:
ProcessStockLevelForm(pECB,
TermId, szBuffer);
break;
}
break;
case 2:
// new-order selected from menu; display new-order
input form
MakeNewOrderForm(TermId, NULL, INPUT_FORM, szBuffer);
break;
case 3:
// payment selected from menu; display payment input
form
MakePaymentForm(TermId, NULL, INPUT_FORM, szBuffer);
break;
case 4:
// delivery selected from menu; display delivery input
form
MakeDeliveryForm(TermId, NULL, INPUT_FORM, szBuffer);
break;
case 5:
// order-status selected from menu; display order-
status input form
szBuffer);
MakeOrderStatusForm(TermId, NULL, INPUT_FORM,
break;
case 6:
// stock-level selected from menu; display stock-level
input form
szBuffer);
MakeStockLevelForm(TermId, NULL, INPUT_FORM,
break;
case 7:
// ExitCmd
TermDelete(TermId);
WelcomeForm(pECB, szBuffer);
break;
case 8:
SubmitCmd(pECB, szBuffer);
break;
case 9:
// menu
MakeMainMenuForm(TermId,
Term.pClientData[TermId].iSyncId, szBuffer);
break;
case 10:
// CMD=Clear
// resets all connections; should only be used when no
other connections are active
TermDeleteAll();
TermInit();
WelcomeForm(pECB, szBuffer);
break;
case 11:
// CMD=Stats
StatsCmd(pECB, szBuffer);
break;
}
}
catch (CBaseErr *e)

```

```

{
    ErrorForm( pECB, e->ErrorType(), e->ErrorNum(), TermId, iSyncId,
e->ErrorText(), szBuffer );
    delete e;
}
catch (...)
{
    ErrorForm( pECB, ERR_TYPE_WEBDLL, 0, TermId, iSyncId, "Error:
Unhandled exception in Web Client.", szBuffer );
}

#ifndef ICECAP
    StopCAP();
#endif

lpbSize = strlen(szBuffer);
wsprintf(szHeader1,
"Content-Type: text/html\r\n"
"Content-Length: %d\r\n"
"Connection: Keep-Alive\r\n\r\n" , lpbSize);
strcat( szHeader1, szBuffer );

(*pECB->ServerSupportFunction)(pECB->ConnID, HSE_REQ_SEND_RESPONSE_HEADER,
szHeader, (LPDWORD) &dWSize, (LPDWORD)szHeader1);

//finish up and keep connection
pECB->dWHttpStatusCode = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
TCHAR szMsg[256];
HANDLE hEventSource;
LPTSTR lpszStrings[2];

// Use event logging to log the error.
//
hEventSource = RegisterEventSource(NULL, TEXT("TPCC.DLL"));

_stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
lpszStrings[0] = szMsg;
lpszStrings[1] = lpszMsg;

if (hEventSource != NULL)
{
    ReportEvent(hEventSource, // handle of event source
    EVENTLOG_ERROR_TYPE, // event type
    0, // event category
    0, // event ID
    NULL, // current user's SID
    2, // strings in lpszStrings
    0, // no bytes of raw data
    (LPCTSTR *)lpszStrings, // array of error strings
    NULL); // no raw data

    (VOID) DeregisterEventSource(hEventSource);
}
}

```

```

/* FUNCTION: DeliveryWorkerThread
 *
 * PURPOSE: This function processes deferred delivery txns. There are
 * typically several threads running this routine. The number of threads
 * is determined by an entry read from the registry. The thread waits for work by
 * waiting on semaphore.
 * When a delivery txn is posted, the semaphore is
 * released. After processing
 * the delivery txn, information is logged to record the
 * txn status and execution
 * time.
 */
/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE           *pTxn = NULL;
    DELIVERY_TRANSACTION          delivery;
    PDELIVERY_DATA           pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF   txnDeliRec;
    DWORD                  index;
    HANDLE                 handles[2];
    SYSTEMTIME             trans_end;           //delivery
transaction finished time
    SYSTEMTIME             trans_start;         //delivery transaction
start time
    assert(txnDeliLog != NULL);

    try
    {
        if (Reg.eDB_Protocol == ODBC)
            pTxn = pCTPCC_ODBC_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        else if (Reg.eDB_Protocol == DBLIB)
            pTxn = pCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
            pDeliveryData = pTxn->BuffAddr_Delivery();
    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in Delivery Txn thread. Could not
connect to database. "
                    "%s. Server=%s, User=%s, Password=%s,
Database=%s",
                    e->ErrorText(), Reg.szDbServer,
Reg.szDbUser, Reg.szDbPassword, Reg.szDbName );
        WriteMessageToEventLog( szTmp );
        delete e;
        goto ErrorExit;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception caught in
DeliveryWorkerThread."));
        goto ErrorExit;
    }
}

```

```

while (TRUE)
{
    try
    {
        //while delivery thread running, i.e. user has not
requested termination
        while (TRUE)
        {
            // need to wait for multiple objects:
            program exit or worker semaphore;
            handles[0] = hDoneEvent;
            handles[1] = hWorkerSemaphore;
            index = WaitForMultipleObjects( 2,
&handles[0], FALSE, INFINITE );
            if (index == WAIT_OBJECT_0)
                goto ErrorExit;

            ZeroMemory(&txnDeliRec, sizeof(txnDeliRec));
            txnDeliRec.TxnType =
TXN_REC_TYPE_TPCC_DELIV_DEF;

            // make a local copy of current entry from
delivery buffer and increment buffer index
            EnterCriticalSection(&DelBuffCriticalSection);
            delivery = *(pDelBuff+dwDelBuffBusyIndex);
            dwDelBuffFreeCount++;
            dwDelBuffBusyIndex++;
            if (dwDelBuffBusyIndex == dwDelBuffSize)
                dwDelBuffBusyIndex = 0;

            LeaveCriticalSection(&DelBuffCriticalSection);

            pDeliveryData->w_id = delivery.w_id;
            pDeliveryData->o_carrier_id =
delivery.o_carrier_id;
            txnDeliRec.w_id = pDeliveryData->w_id;
            txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;
            txnDeliRec.TxnStartT0 =
Get64BitTime(&delivery.queue);

            GetLocalTime( &trans_start );
            pTxn->Delivery();
            GetLocalTime( &trans_end );

            //log txn
            txnDeliRec.TxnStatus = ERR_SUCCESS;
            for (int i=0; i<10; i++)
                txnDeliRec.o_id[i] =
pDeliveryData->o_id[i];
            txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) - txnDeliRec.TxnStartT0);
            txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) - Get64BitTime(&trans_start));

            if (txnDeliLog != NULL)
                txnDeliLog-
>WriteToLog(&txnDeliRec);
        }
    }
}

```

```

        }

        catch (CBaseErr *e)
        {
            char szTmp[1024];
            wsprintf( szTmp, "Error in Delivery Txn thread. %s",
e->ErrorText() );
            WriteMessageToEventLog( szTmp );

            // log the error txn
            txndeliRec.TxnStatus = e->ErrorType();
            if (txndeliLog != NULL)
                txndeliLog->WriteToLog(&txndeliRec);

            delete e;
        }
        catch (...)
        {
            // unhandled exception; shouldn't happen; not much we
can do...
            WriteMessageToEventLog(TEXT("Unhandled exception
caught in DeliveryWorkerThread."));
        }
    }

    ErrorExit:
    {
        delete pTxn;
        _endthread();
    }

/* FUNCTION: PostDeliveryInfo
*
* PURPOSE: This function enters the delivery txn into the deferred delivery
buffer.
*
* RETURNS:      BOOL      FALSE      delivery information posted
successfully
*                  TRUE      error cannot
post delivery info
*/
BOOL PostDeliveryInfo(short w_id, short o_carrier_id)
{
    BOOL bError;

    EnterCriticalSection(&DelBuffCriticalSection);
    if (dwDelBuffFreeCount > 0)
    {
        bError = FALSE;
        (pDelBuff+dwDelBuffFreeIndex)->w_id
w_id;
        (pDelBuff+dwDelBuffFreeIndex)->o_carrier_id
o_carrier_id;
        GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)->queue);

        dwDelBuffFreeCount--;
        dwDelBuffFreeIndex++;
        if (dwDelBuffFreeIndex == dwDelBuffSize)
            dwDelBuffFreeIndex = 0; // wrap-around
    if at end of buffer
    }
    else
        // No free buffers. Return an error, which indicates that the
delivery buffer is full.
}

```

```

        // Most likely, the number of delivery worker threads needs to
be increased to keep up
        // with the txn rate.
        bError = TRUE;
        LeaveCriticalSection(&DelBuffCriticalSection);

        if (!bError)
            // increment worker semaphore to wake up a worker thread
            ReleaseSemaphore( hWorkerSemaphore, 1, NULL );

        return bError;
    }

    /* FUNCTION: ProcessQueryString
    *
    * PURPOSE: This function extracts the relevant information out of the http
command passed in from
    *                                     the browser.
    *
    * COMMENTS: If this is the initial connection i.e. client is at welcome
screen then
    *                                     there will not be a terminal id or current
form id. If this is the case
    *                                     then the pTermid and pFormid return values
are undefined.
    */
void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int *pCmd, int *pFormId, int
*pTermId, int *pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e. CMD=command
    static char *szCmds[] =
    {
        "Process", "..NewOrder..", "..Payment..", "..Delivery..",
"..Order-Status..", "..Stock-Level..",
"..Exit..", "Submit", "Menu", "Clear", "Stats", ""
    };

    *pCmd      = 0; // default is the login screen
    *pTermId   = 0;

    // if no params (i.e., empty query string), then return login screen
    if (strlen(pECB->lpszQueryString) == 0)
        return;

    // parse FORMID, TERMID, and SYNCID
    *pFormId = GetIntKeyValue(&ptr, "FORMID", NO_ERR, NO_ERR);
    *pTermId = GetIntKeyValue(&ptr, "TERMID", NO_ERR, NO_ERR);
    *pSyncId = GetIntKeyValue(&ptr, "SYNCID", NO_ERR, NO_ERR);

    // parse CMD
    GetKeyValue(&ptr, "CMD", szBuffer, sizeof(szBuffer),
ERR_COMMAND_UNDEFINED);

    // see which command it matches
    for(i=0; i++)
    {
        if (szCmds[i][0] == 0)
            // no more; no match; return error
    }
}

```

```

        throw new CWEBCLNT_ERR( ERR_COMMAND_UNDEFINED );
    if ( !strcmp(szCmds[i], szBuffer) )
    {
        *pCmd = i+1;
        break;
    }
}

/* FUNCTION: void WelcomeForm
*/
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this is first form client sees.
    strcpy( szBuffer, "<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>" );
    szBuffer += 1024 - strlen( szBuffer );
    szBuffer[1023] = '\0';

    Web Client (ver 4.20)</BIG></B> <BR> <BR>
    Microsoft TPC-C
    <font face=\\"Courier
    Compiled: \"__DATE__\",
    __TIME__\" <BR>
    ( \"__TIMESTAMP__\" ) <BR>

ACTION=\\"tpcc.dll\\" METHOD=\\"GET\\\">
NAME=\\"STATUSID\\" VALUE=\\"0\\\""
NAME=\\"ERROR\\" VALUE=\\"0\\\""
NAME=\\"FORMID\\" VALUE=\\"1\\\""
NAME=\\"TERMINID\\" VALUE=\\"0\\\""
NAME=\\"SYNCID\\" VALUE=\\"0\\\""
NAME=\\"VERSION\\" VALUE=\\"WEBCLIENT_VERSION \\\""
);

    sprintf( szTmp, "Configuration Settings: <BR><font face=\\"Courier
New\\" color=\\"blue\\\"><PRE>
    Txn Monitor      =
<BR>%s</B><BR>
    Database protocol =
<BR>%d</B><BR>
    Max Connections   =
<BR>%d</B><BR>
    # of Delivery Threads =
<BR>%d</B><BR>
    Max Pending Deliveries =
<BR>%d</B><BR>
    , szTxnMonNames[Reg.eTxnMon],
szDBNames[Reg.eDB_Protocol],
    Reg.dwMaxConnections, dwNumDeliveryThreads,
dwDelBuffSize );
    strcat( szBuffer, szTmp);
}

```

```

if (Reg.eTxnMon == COM)
{
    sprintf( szTmp, "COM Single Pool      = <B>%s</B><BR>",
             Reg.bCOM_SinglePool ? "YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>" );

if (Reg.eTxnMon == None)
    // connection options may be specified when not using a txn
monitor
    sprintf( szTmp, "Please enter your database options for this
connection:<BR>" );
    szBuffer += 1024 - strlen( szBuffer );
    szBuffer[1023] = '\0';

    New\\" color=\\"blue\\\"><PRE>
NAME=\\"db_server\\" SIZE=20 VALUE=\\"%s\\\"<BR>
NAME=\\"db_user\\" SIZE=20 VALUE=\\"%s\\\"<BR>
NAME=\\"db_passwd\\" SIZE=20 VALUE=\\"%s\\\"<BR>
NAME=\\"db_name\\" SIZE=20 VALUE=\\"%s\\\"<BR>
    "</PRE></font>
    , Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
    else
        // if using a txn monitor, connection options are determined
from registry; can't
        // set per user. show options fyi
        sprintf( szTmp, "Database options which will be used by the
transaction monitor:<BR>" );
    New\\" color=\\"blue\\\"><PRE>
NAME=\\"db_server\\"
NAME=\\"db_user\\"
NAME=\\"db_passwd\\"
NAME=\\"db_name\\"
    "</PRE></font>
    , Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
    strcat( szBuffer, szTmp);

    sprintf( szTmp, "Please enter your Warehouse and District for this
session:<BR>" );
    szBuffer += 1024 - strlen( szBuffer );
    szBuffer[1023] = '\0';
    szBuffer[1024] = '\0';

    szBuffer[1024] = '\0';
    strcat( szBuffer, szTmp);
    strcat( szBuffer, "Warehouse ID = <INPUT NAME=\\"w_id\\" SIZE=4><BR>
                                         "District ID = <INPUT
NAME=\\"d_id\\" SIZE=2><BR>
                                         "</PRE></font><HR>
                                         "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"Submit\\\">
                                         "</FORM></BODY></HTML>" );
}
/* FUNCTION: SubmitCmd

```

```

/*
 * PURPOSE: This function allocated a new terminal id in the Term structure
array.
*/
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int             iNewTerm;
    char  *ptr = pECB->lpszQueryString;

    char szVersion[32]      = { 0 };
    char szServer[32]       = { 0 };
    char szUser[32]          = "sa";
    char szPassword[32]     = { 0 };
    char szDatabase[32]     = "tpcc";

    // validate version field; the version field ensures that the RTE is
    synchronized with the web client
    GetKeyValue(&ptr, "VERSION", szVersion, sizeof(szVersion),
ERR_VERSION_MISMATCH);
    if (strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCNT_ERR( ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server", szServer, sizeof(szServer),
ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user", szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd", szPassword, sizeof(szPassword),
NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name", szDatabase, sizeof(szDatabase),
NO_ERR);
    }

    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id", ERR_HTML_ILL_FORMED,
ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCNT_ERR( ERR_W_ID_INVALID );

    // parse district ID
    int d_id = GetIntKeyValue(&ptr, "d_id", ERR_HTML_ILL_FORMED,
ERR_D_ID_INVALID);
    if ( d_id < 1 || d_id > 10 )
        throw new CWEBCNT_ERR( ERR_D_ID_INVALID );

    iNewTerm = TermAdd();

    Term.pClientData[iNewTerm].w_id = w_id;
    Term.pClientData[iNewTerm].d_id = d_id;

    try
    {
        if (Reg.eTxnMon == TUXEDO)
            Term.pClientData[iNewTerm].pTxn = pCTPCC_TUXEDO_new();
        else if (Reg.eTxnMon == ENCINA)
            Term.pClientData[iNewTerm].pTxn = pCTPCC_ENCINA_new();
    }

```

```

        else if (Reg.eTxnMon == COM)
            Term.pClientData[iNewTerm].pTxn = pCTPCC_COM_new(
Reg.bCOM_SinglePool );
        else if (Reg.eDB_Protocol == ODBC)
            Term.pClientData[iNewTerm].pTxn = pCTPCC_ODBC_new(
szServer, szUser, szPassword, szMyComputerName, szDatabase );
        else if (Reg.eDB_Protocol == DBLIB)
            Term.pClientData[iNewTerm].pTxn = pCTPCC_DBLIB_new(
szServer, szUser, szPassword, szMyComputerName, szDatabase );
    }
    catch (...)
    {
        TermDelete(iNewTerm);
        throw; // pass exception upward
    }
    MakeMainMenuForm(iNewTerm, Term.pClientData[iNewTerm].iSyncId, szBuffer);
}

/* FUNCTION: StatsCmd
 */
/* PURPOSE: This function returns to the browser the total number of active
terminal ids.
*/
/* This routine is for development/debugging purposes.
*/
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int i;
    int iTotal;

    EnterCriticalSection(&TermCriticalSection);

    iTotal = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            iTotal++;
    }
    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,
        "<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>" "<BODY><B><BIG> Total Active Connections: %d
</BIG></B><BR></BODY></HTML>" , iTotal );
}

char *CWEBCNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        {ERR_COMMAND_UNDEFINED,
        "Command undefined." },
        {ERR_D_ID_INVALID,
        "Invalid District ID Must be 1 to 10." },
    },

```

```

{
    {   ERR_DELIVERY_CARRIER_ID_RANGE,
        "Delivery Carrier ID out of range must be 1 - 10."
    },
    {   ERR_DELIVERY_CARRIER_INVALID,
        "Delivery Carrier ID invalid must be numeric 1 - 10."
    },
    {   ERR_DELIVERY_MISSING_OCD_KEY,
        "Delivery missing Carrier ID key \"OCD*\"."
    },
    {   ERR_DELIVERY_THREAD_FAILED,
        "Could not start delivery worker thread."
    },
    {   ERR_GETPROCADDR_FAILED,
        "Could not map proc in DLL. GetProcAddress error. DLL="
    },
    {   ERR_HTML_ILL_FORMED,
        "Required key field is missing from HTML string."
    },
    {   ERR_INVALID_SYNC_CONNECTION,
        "Invalid Terminal Sync ID."
    },
    {   ERR_INVALID_TERMID,
        "Invalid Terminal ID."
    },
    {   ERR_LOADDLL_FAILED,
        "Load of DLL failed. DLL="
    },
    {   ERR_MAX_CONNECTIONS_EXCEEDED,
        "No connections available. Max Connections is probably too low."
    },
    {   ERR_MISSING_REGISTRY_ENTRIES,
        "Required registry entries are missing. Rerun INSTALL to correct."
    },
    {   ERR_NEWORDER_CUSTOMER_INVALID,
        "New Order customer id invalid data type, range = 1 to 3000."
    },
    {   ERR_NEWORDER_CUSTOMER_KEY,
        "New Order missing Customer key \"CID*\"."
    },
    {   ERR_NEWORDER_DISTRICT_INVALID,
        "New Order District ID Invalid range 1 - 10."
    },
    {   ERR_NEWORDER_FORM_MISSING_DID,
        "New Order missing District key \"DID*\"."
    },
    {   ERR_NEWORDER_ITEMID_INVALID,
        "Order Item Id is wrong data type, must be numeric."
    },
    {   ERR_NEWORDER_ITEMID_RANGE,
        "New Order Item Id is out of range. Range = 1 to 999999."
    },
    {   ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
        "Order Item_Id field entered without a corresponding Supp_W."
    },
    {   ERR_NEWORDER_MISSING_IID_KEY,
        "Order missing Item Id key \"IID*\"."
    },
    {   ERR_NEWORDER_MISSING_QTY_KEY,
        "Order Missing Qty key \"Qty##*\"."
    },
    {   ERR_NEWORDER_MISSING_SUPPW_KEY,
        "New Order missing Supp_W key \"SP##*\"."
    },
    {   ERR_NEWORDER_NOITEMS_ENTERED,
        "Order No order lines entered."
    },
}

```

```

{
    {   ERR_NEWORDER_QTY_INVALID,
        "New Order Qty invalid must be numeric range 1 - 99."
    },
    {   ERR_NEWORDER_QTY_RANGE,
        "New Order Qty is out of range. Range = 1 to 99."
    },
    {   ERR_NEWORDER_QTY_WITHOUT_SUPPW,
        "New Order Qty field entered without a corresponding Supp_W."
    },
    {   ERR_NEWORDER_SUPPW_INVALID,
        "New Order Supp_W invalid data type must be numeric."
    },
    {   ERR_NO_SERVER_SPECIFIED,
        "No Server name specified."
    },
    {   ERR_ORDERSTATUS_CID_AND_CLT,
        "Order Status Only Customer ID or Last Name may be entered, not both."
    },
    {   ERR_ORDERSTATUS_CID_INVALID,
        "Order Status Customer ID invalid, range must be numeric 1 - 3000."
    },
    {   ERR_ORDERSTATUS_CLT_RANGE,
        "Order Status Customer last name longer than 16 characters."
    },
    {   ERR_ORDERSTATUS_DID_INVALID,
        "Order Status District invalid, value must be numeric 1 - 10."
    },
    {   ERR_ORDERSTATUS_MISSING_CID_CLT,
        "Order Status Either Customer ID or Last Name must be entered."
    },
    {   ERR_ORDERSTATUS_MISSING_CID_KEY,
        "Order Status missing Customer key \"CID*\"."
    },
    {   ERR_ORDERSTATUS_MISSING_CLT_KEY,
        "Order Status missing Customer Last Name key \"CLT*\"."
    },
    {   ERR_ORDERSTATUS_MISSING_DID_KEY,
        "Order Status missing District key \"DID*\"."
    },
    {   ERR_PAYMENT_CDI_INVALID,
        "Payment Customer district invalid must be numeric."
    },
    {   ERR_PAYMENT_CID_AND_CLT,
        "Payment Only Customer ID or Last Name may be entered, not both."
    },
    {   ERR_PAYMENT_CUSTOMER_INVALID,
        "Payment Customer data type invalid, must be numeric."
    },
    {   ERR_PAYMENT_CWI_INVALID,
        "Payment Customer Warehouse invalid, must be numeric."
    },
    {   ERR_PAYMENT_DISTRICT_INVALID,
        "Payment District ID is invalid, must be 1 - 10."
    },
    {   ERR_PAYMENT_HAM_INVALID,
        "Payment Amount invalid data type must be numeric."
    },
    {   ERR_PAYMENT_HAM_RANGE,
        "Payment Amount out of range, 0 - 9999.99."
    },
    {   ERR_PAYMENT_LAST_NAME_TO_LONG,
        "Payment Customer last name longer than 16 characters."
    },
}

```

```

        {
            ERR_PAYMENT_MISSING_CDI_KEY,
        "Payment missing Customer district key \"CDI*\"."
        },
        {
            ERR_PAYMENT_MISSING_CID_CLT,
        "Payment Either Customer ID or Last Name must be entered."
        },
        {
            ERR_PAYMENT_MISSING_CID_KEY,
        "Payment missing Customer Key \"CID*\"."
        },
        {
            ERR_PAYMENT_MISSING_CLT_KEY,
        "Payment missing Customer Last Name key \"CLT*\"."
        },
        {
            ERR_PAYMENT_MISSING_CWI_KEY,
        "Payment missing Customer Warehouse key \"CWI*\"."
        },
        {
            ERR_PAYMENT_MISSING_DID_KEY,
        "Payment missing District Key \"DID*\"."
        },
        {
            ERR_PAYMENT_MISSING_HAM_KEY,
        "Payment missing Amount key \"HAM*\"."
        },
        {
            ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,    "Stock Level;
missing Threshold key \"TT*\"."
        },
        {
            ERR_STOCKLEVEL_THRESHOLD_INVALID,
        "Stock Level; Threshold value must be in the range = 1 - 99."
        },
        {
            ERR_STOCKLEVEL_THRESHOLD_RANGE,
        "Stock Level Threshold out of range, range must be 1 - 99."
        },
        {
            ERR_VERSION_MISMATCH,
        "Invalid version field. RTE and Web Client are probably out of
sync. " },
        {
            ERR_W_ID_INVALID,
        "Invalid Warehouse ID."
        },
        {
            0,
            ""
        }
    }

};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown error number." );
        break;
    }
    if (m_Error == errorMsgs[i].iError)
    {
        strcpy( szTmp, errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    wsprintf( szTmp+strlen(szTmp), " Error=%d", m_SystemErr );

```

```

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

/* FUNCTION: GetKeyValue
*
* PURPOSE:      This function parses a http formatted string for specific key
values.
*
* ARGUMENTS:    char                                *pQueryString      http string
from client browser
*               char                                *pKey
*               key value to look for          char                *pValue
*               character array into which to place key's value
*               int                               maximum length of key value array.           iMax
*               WEBERROR                         err
*               error value to throw
*
* RETURNS:      nothing.
*
* ERROR:        if (the pKey value is not found) then
*                           if (err == 0)
*                               return (empty string)
*                           else
*                               throw CWEBCLNTR_ERR(err)
*
* COMMENTS:     http keys are formatted either KEY=value& or KEY=value\0. This
DLL formats
keys can be extracted in the
*               TPC-C input fields in such a manner that the
above manner.
*/
void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax, WEBERROR
err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;

    iMax--; // one position is for terminating null
    while( *ptr && *ptr != '=' && iMax )
    {
        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null

    *pQueryString = ptr;
    return;

ErrorExit:
    if (err != NO_ERR)

```

```

        throw new CWEBCNLT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
*
* PURPOSE: This function parses a http formatted string for a specific key
value.
*
* ARGUMENTS: char *pQueryString http string
from client browser
*           char *pKey
key value to look for
*           WEBERROR NoKeyErr
error value to throw if key not found
*           WEBERROR NotIntErr
error value to throw if value not numeric
*
* RETURNS: integer
*
* ERROR: if (the pKey value is not found) then
*           if (NoKeyErr != NO_ERR)
*               throw CWEBCNLT_ERR(err)
*           else
*               return 0
*           else if (non-numeric char found) then
*               if (NotIntErr != NO_ERR) then
*                   throw CWEBCNLT_ERR(err)
*               else
*                   return 0
*
* COMMENTS: http keys are formatted either KEY=value& or KEY=value\0. This
DLL formats
*           TPC-C input fields in such a manner that the
keys can be extracted in the
*           above manner.
*/
int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR NoKeyErr, WEBERROR
NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;

    ptr0 = ptr; // remember starting point
    // scan string until a terminator (null or &) or a non-digit
    while( *ptr && *ptr != '&' && isdigit(*ptr) )
        ptr++;

    // make sure we stopped scanning for the right reason
    if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
    {
        if (NotIntErr != NO_ERR)
            throw new CWEBCNLT_ERR( NoKeyErr );
        return 0;
    }
}

```

```

*pQueryString = ptr;
return atoi(ptr0);

ErrorNoKey:
if (NoKeyErr != NO_ERR)
    throw new CWEBCNLT_ERR( NoKeyErr );
return 0;
}

/* FUNCTION: TermInit
*
* PURPOSE: This function initializes the client terminal structure; it is
called when the TPCC.DLL
*           is first loaded by the inet service.
*
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries = Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData = (PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCNLT_ERR( ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData, Term.iNumEntries * sizeof(CLIENTDATA) );

    Term.iFreeList = Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets set to -1, which marks it as
"in use".
    // This is intentional, as the zero entry is used as an anchor and
never
    // allocated as an actual terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree = i-1;
    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
*
* PURPOSE: This function frees allocated resources associated with the
terminal structure.
*
* ARGUMENTS: none
*
* RETURNS: None
*
* COMMENTS: This function is called only when the inet service unloads the
TPCC.DLL
*
*/

```

```

void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            delete Term.pClientData[i].pTxn;
    }

    Term.iFreeList = 0;
    Term.iNumEntries = 0;
    if (Term.pClientData)
        free(Term.pClientData);
    Term.pClientData = NULL;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermAdd
 *
 * PURPOSE: This function assigns a terminal id which is used to identify a
client browser.
 *
 * RETURNS: int assigned terminal id
 */

int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList = Term.pClientData[iNewTerm].iNextFree;
        Term.pClientData[iNewTerm].iNextFree = -1; // indicates this
position is in use
    }
    else
    {
        // no open slots, so find the slot that hasn't been used in the
longest time and reuse it
        for(iNewTerm=1, i=1, iTickCount=0x7FFFFFFF;
i<Reg.dwMaxConnections; i++)
        {
            if (iTickCount > Term.pClientData[i].iTICKCount)
            {
                iTickCount = Term.pClientData[i].iTICKCount;
                iNewTerm = i;
            }
        }
        // if oldest term is less than one minute old, it probably means
that more connections
        // are being attempted than were specified as "Max Connections"
at install. In this case,
        // do not bump existing connection; instead, return error to
requestor.
        if ((GetTickCount() - iTickCount) < 60000)

```

```

    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR( ERR_MAX_CONNECTIONS_EXCEEDED );
    }
}

Term.pClientData[iNewTerm].iTICKCount = GetTickCount();
Term.pClientData[iNewTerm].iSyncId = Term.iMasterSyncId++;
Term.pClientData[iNewTerm].pTxn = NULL;

LeaveCriticalSection(&TermCriticalSection);
return iNewTerm;
}

/* FUNCTION: TermDelete
 *
 * PURPOSE: This function makes a terminal entry in the Term array available
for reuse.
 *
 * ARGUMENTS: int id
 *             Terminal id of client exiting
 */

void TermDelete(int id)
{
    if (id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;

        // put onto free list
        EnterCriticalSection(&TermCriticalSection);

        Term.pClientData[id].iNextFree = Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
 */

void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int iErrorNum, int iTermId,
int iSyncId, char *szErrorText, char *szBuffer )
{
    wsprintf(szBuffer,
        "<HTML><HEAD><TITLE>TPC-C Error</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
        "<BOLD>An Error Occurred</BOLD><BR><BR>%s"
        "<BR><BR><HR>"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Delivery..\">"
    );
}

```

```

        "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\\" VALUE=\\"..Order-
Status..\\\">"
        "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\\" VALUE=\\"..Stock-Level..\\\">"
        "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\\" VALUE=\\"..Exit..\\\">"
        "</FORM></BODY></HTML>"
        , iType, iErrorNum, MAIN_MENU_FORM, iTermId, iSyncId,
szErrorText );
}

/* FUNCTION: MakeMainMenuForm
*/
void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm)
{
    wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Main Menu</TITLE></HEAD><BODY>"
        "Select Desired Transaction.<BR><HR>"
        "<FORM ACTION=\\"tpcc.dll\\\" METHOD=\\"GET\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"STATUSID\\\" VALUE=\\"0\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"ERROR\\\" VALUE=\\"0\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"FORMID\\\" VALUE=\\"%d\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"TERMID\\\" VALUE=\\"%d\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"SYNCID\\\" VALUE=\\"%d\\\">"
        "<INPUT TYPE=\\"submit\\\" NAME=\\"CMD\\\" VALUE=\\"..NewOrder..\\\">"
        "<INPUT TYPE=\\"submit\\\" NAME=\\"CMD\\\" VALUE=\\"..Payment..\\\">"
        "<INPUT TYPE=\\"submit\\\" NAME=\\"CMD\\\" VALUE=\\"..Delivery..\\\">"
        "<INPUT TYPE=\\"submit\\\" NAME=\\"CMD\\\" VALUE=\\"..Order-"
Status..\\\">"
        "<INPUT TYPE=\\"submit\\\" NAME=\\"CMD\\\" VALUE=\\"..Stock-Level..\\\">"
        "<INPUT TYPE=\\"submit\\\" NAME=\\"CMD\\\" VALUE=\\"..Exit..\\\">"
        "</FORM></BODY></HTML>"
        , MAIN_MENU_FORM, iTermId, iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*
* PURPOSE: This function constructs the Stock Level HTML page.
*
* COMMENTS: The internal client buffer is created when the terminal id is
assigned and should not
* be freed except when the client terminal id
is no longer needed.
*/
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA *pStockLevelData, BOOL bInput,
char *szForm)
{
    int c;

    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Stock Level</TITLE></HEAD><FORM"
ACTION=\\"tpcc.dll\\\" METHOD=\\"GET\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"STATUSID\\\" VALUE=\\"0\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"ERROR\\\" VALUE=\\"0\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"FORMID\\\" VALUE=\\"%d\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"TERMID\\\" VALUE=\\"%d\\\">"
        "<INPUT TYPE=\\"hidden\\\" NAME=\\"SYNCID\\\" VALUE=\\"%d\\\">"
        "<PRE><font face=\\"Courier\\\">
Stock-Level<BR>"           "Warehouse: %4.4d District: %2.2d<BR> <BR>",
STOCK_LEVEL_FORM, iTermId, Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id, Term.pClientData[iTermId].d_id);
}

```

```

    "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">
    "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">
    "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">
    "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\">
    "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">
    "<PRE><font face=\"Courier\">

New Order<BR>
    , bValid ? 0 : ERR_BAD_ITEM_ID, NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

if ( bInput )
{
    c += wsprintf(szForm+c, "Warehouse: %4.4d    ,
Term.pClientData[iTermId].w_id );

strcpy( szForm+c,
        "District: <INPUT NAME=\"DID\" SIZE=1>
Date:<BR>"           "Customer: <INPUT NAME=\"CID\" SIZE=4>   Name:
Credit:   %Disc:<BR>           "Order Number:          Number of Lines:
W_tax:     D_tax:<BR> <BR>"           "Supp_W  Item_Id  Item Name          Qty
Stock B/G Price Amount<BR>"           " <INPUT NAME=\"SP00\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty00\">
NAME=\"IID00*\" SIZE=6>           " <INPUT NAME=\"SP01\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty01\">
NAME=\"IID01*\" SIZE=6>           " <INPUT NAME=\"SP02\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty02\">
NAME=\"IID02*\" SIZE=6>           " <INPUT NAME=\"SP03\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty03\">
NAME=\"IID03*\" SIZE=6>           " <INPUT NAME=\"SP04\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty04\">
NAME=\"IID04*\" SIZE=6>           " <INPUT NAME=\"SP05\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty05\">
NAME=\"IID05*\" SIZE=6>           " <INPUT NAME=\"SP06\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty06\">
NAME=\"IID06*\" SIZE=6>           " <INPUT NAME=\"SP07\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty07\">
NAME=\"IID07*\" SIZE=6>           " <INPUT NAME=\"SP08\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty08\">
NAME=\"IID08*\" SIZE=6>           " <INPUT NAME=\"SP09\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty09\">
NAME=\"IID09*\" SIZE=6>           " <INPUT NAME=\"SP10\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty10\">
NAME=\"IID10*\" SIZE=6>           " <INPUT NAME=\"SP11\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty11\">
NAME=\"IID11*\" SIZE=6>           " <INPUT NAME=\"SP12\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty12\">

    "<INPUT NAME=\"SP13\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty13\">
    "<INPUT NAME=\"SP14\" SIZE=4> <INPUT
                                         <INPUT NAME=\"Qty14\">
    "Execution Status:
Total:<BR>
    "</font></PRE><HR>
    "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">
    "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">
    "</FORM></HTML>
}

else
{
    c += wsprintf(szForm+c, "Warehouse: %4.4d    District: %2.2d
Date: ", pNewOrderData->w_id,
               pNewOrderData->d_id);

    if ( bValid )
    {
        c += wsprintf(szForm+c, "%2.2d-%2.2d-%4.4d
%2.2d:%2.2d:%2.2d",
                      pNewOrderData->o_entry_d.day,
                      pNewOrderData->o_entry_d.month,
                      pNewOrderData->o_entry_d.year,
                      pNewOrderData->o_entry_d.hour,
                      pNewOrderData->o_entry_d.minute,
                      pNewOrderData->o_entry_d.second);
    }

    c += wsprintf(szForm+c, "<BR>Customer: %4.4d   Name: %-16s
Credit: %-2s ", pNewOrderData->c_id, pNewOrderData->c_last,
               pNewOrderData->c_credit);

    if ( bValid )
    {
        c += sprintf(szForm+c,
                     "%Disc: %5.2f
<BR>"           "Order Number: %8.8d
Number of Lines: %2.2d           W_tax: %5.2f   D_tax: %5.2f <BR> <BR>"           "Supp_W  Item_Id  Item
Name           Qty Stock B/G Price Amount<BR>",
                     100.0*pNewOrderData->c_discount,
                     pNewOrderData->o_id,
                     pNewOrderData->o.ol_cnt,
                     100.0 * pNewOrderData->w_tax,
                     100.0 * pNewOrderData->d_tax);

        for(i=0; i<pNewOrderData->o.ol_cnt; i++)
        {
            c += sprintf(szForm+c, " %4.4d %6.6d  %-
24s %2.2d  %3.3d  %1.1s  $%6.2f $%7.2f <BR>",
                          pNewOrderData-
                           >OL[i].ol_supply_w_id,
                          pNewOrderData->OL[i].ol_i_id,
                          pNewOrderData->OL[i].ol_i_name,
                          pNewOrderData->OL[i].ol_quantity,

```

```

        pNewOrderData->OL[i].ol_stock,
        pNewOrderData-
        pNewOrderData->OL[i].ol_i_price,
        pNewOrderData->OL[i].ol_amount );

    }
    else
    {
        c += wsprintf(szForm+c,
                     "%Disc:<BR>"
                     "Order Number: %8.8d Number of Lines:
W_tax:          D_tax:<BR> <BR>"           "Supp_W  Item_Id  Item Name
Qty Stock B/G Price Amount<BR>"           , pNewOrderData->o_id);

        i = 0;
    }

    strncpy( szForm+c, szBR, (15-i)*5 );
    c += (15-i)*5;

    if ( bValid )
        if ( committed.           c += sprintf(szForm+c, "Execution Status: Transaction
Total: %8.2f ", pNewOrderData->total_amount);
else           c += wsprintf(szForm+c, "Execution Status: Item number
Total:");

        strcpy(szForm+c,
               " <BR></font><PRE><HR>"           " <INPUT TYPE='submit' NAME='CMD'>
VALUE='..NewOrder..'">           " <INPUT TYPE='submit' NAME='CMD'>
VALUE='..Payment..'">           " <INPUT TYPE='submit' NAME='CMD'>
VALUE='..Delivery..">           " <INPUT TYPE='submit' NAME='CMD' VALUE='..Order-
Status..">
Level..%">           " <INPUT TYPE='submit' NAME='CMD' VALUE='..Stock-
Value='..Exit..">
               "</FORM></HTML>" );
    }

/* FUNCTION: MakePaymentForm
*
* COMMENTS:      The internal client buffer is created when the terminal id is
assigned and should not
*                           be freed except when the client terminal id
is no longer needed.
*/
void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData, BOOL bInput, char
*szForm)
{
    int c;

```

```

c = wsprintf(szForm,
             "<HTML><HEAD><TITLE>TPC-C Payment</TITLE></HEAD><BODY>"           "<FORM ACTION='tppc.dll' METHOD='GET'>"
             "<INPUT TYPE='hidden' NAME='STATUSID' VALUE='0'>"           "<INPUT TYPE='hidden' NAME='ERROR' VALUE='0'>"
             "<INPUT TYPE='hidden' NAME='FORMID' VALUE='%d'>"           "<INPUT TYPE='hidden' NAME='TERMD' VALUE='%d'>"
             "<INPUT TYPE='hidden' NAME='SYNCID' VALUE='%d'>"           "<PRE><font face='Courier'>"

Payment<BR>
"Date: "
, PAYMENT_FORM, iTermId, Term.pClientData[iTermId].iSyncId);

if ( !bInput )
{
    c += wsprintf(szForm+c, "%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
                  pPaymentData->h_date.day,
                  pPaymentData->h_date.month,
                  pPaymentData->h_date.year,
                  pPaymentData->h_date.hour,
                  pPaymentData->h_date.minute,
                  pPaymentData->h_date.second);
}

if ( bInput )
{
    c += wsprintf(szForm+c,
                  "<BR> <BR>Warehouse: %4.4d"
                  " District: <INPUT
NAME='DID'" SIZE=1><BR> <BR> <BR> <BR>
"Customer: <INPUT NAME='CID'" SIZE=4>
"Cust-Warehouse: <INPUT NAME='CWI'" SIZE=4> "
"Cust-District: <INPUT NAME='CDI'" SIZE=1><BR>
"Name: <INPUT NAME='CLT'" SIZE=16>
Since:<BR>
"
Credit:<BR>
"
Disc:<BR>
"
Phone:<BR> <BR>
"Amount Paid: $<INPUT NAME='HAM'" SIZE=7>
New Cust-Balance:<BR>
"Credit Limit:<BR> <BR>Cust-Data: <BR> <BR> <BR>
<BR></font></PRE><HR>"           "<INPUT TYPE='submit' NAME='CMD'>
VALUE='Process'"><INPUT TYPE='submit' NAME='CMD' VALUE='Menu'>
" </BODY></FORM></HTML>"           ", Term.pClientData[iTermId].w_id);

}
else
{
    c += wsprintf(szForm+c,
                  "<BR> <BR>Warehouse: %4.4d
District: %2.2d<BR>"           "%-20s %-20s %-20s %-20s
"%-20s %-20s %-20s %-20s
"%-20s %-2s %-5.5s-%4.4s %-20s %-2s %-5.5s-
%4.4s<BR> <BR>"           "Customer: %4.4d Cust-Warehouse: %4.4d Cust-
District: %2.2d<BR>"           "Name: %-16s %-2s %-16s Since: %2.2d-%2.2d-
%4.4d<BR>"           );
}

```

```

        "           %-20s           Credit: %-2s<BR>
        , Term.pClientData[iTermId].w_id, pPaymentData->d_id
        , pPaymentData->w_street_1, pPaymentData->d_street_1
        , pPaymentData->w_street_2, pPaymentData->d_street_2
        , pPaymentData->w_city, pPaymentData->w_state,
pPaymentData->w_zip, pPaymentData->w_zip+5
        , pPaymentData->d_city, pPaymentData->d_state,
pPaymentData->d_zip, pPaymentData->d_zip+5
        , pPaymentData->c_id, pPaymentData->c_w_id,
pPaymentData->c_d_id
        , pPaymentData->c_first, pPaymentData->c_middle,
pPaymentData->c_last
        , pPaymentData->c_since.day, pPaymentData-
>c_since.month,     pPaymentData->c_since.year
        , pPaymentData->c_street_1, pPaymentData->c_credit
        );
);

c += sprintf(szForm+c,
        "           %-20s           %%Disc:
$5.2f<BR>",
        pPaymentData->c_street_2, 100.0*pPaymentData-
>c_discount);

c += wsprintf(szForm+c,
        "           %-20s %-2s $5.5s-%4.4s           Phone:   %6.6s-
%3.3s-%3.3s-%4.4s<BR> <BR>",
        pPaymentData->c_city, pPaymentData->c_state,
pPaymentData->c_zip, pPaymentData->c_zip+5,
        pPaymentData->c_phone, pPaymentData->c_phone+6,
pPaymentData->c_phone+9, pPaymentData->c_phone+12 );

c += sprintf(szForm+c,
        "Amount Paid:           $7.2f           New Cust-Balance:
$%14.2f<BR>"           "Credit Limit:   $13.2f<BR> <BR>"
        , pPaymentData->h_amount, pPaymentData->c_balance
        , pPaymentData->c_credit_lim
        );
);

if ( pPaymentData->c_credit[0] == 'B' && pPaymentData-
>c_credit[1] == 'C' )
        c += wsprintf(szForm+c,
        "Cust-Data:   %-50.50s<BR>
%-50.50s<BR>           %-50.50s<BR>",
        pPaymentData->c_data,
pPaymentData->c_data+50, pPaymentData->c_data+100, pPaymentData->c_data+150 );
        else
        strcpy(szForm+c, "Cust-Data: <BR> <BR> <BR> <BR>");

strcat(szForm,           " <BR></font></PRE><HR>
NAME=\\"CMD\\" VALUE=\\"..NewOrder..\\">"           "<INPUT TYPE=\\"submit\"
NAME=\\"CMD\\" VALUE=\\"..Payment..\\">"           "<INPUT TYPE=\\"submit\"
NAME=\\"CMD\\" VALUE=\\"..Delivery..\\">"           "<INPUT TYPE=\\"submit\"
NAME=\\"CMD\\" VALUE=\\"..Order-Status..\\">"           "<INPUT TYPE=\\"submit\"
NAME=\\"CMD\\" VALUE=\\"..Stock-Level..\\">"           "<INPUT TYPE=\\"submit\"
NAME=\\"CMD\\" VALUE=\\"..Exit..\\">"           "<INPUT TYPE=\\"submit\"

```

```

c += wsprintf(szForm+c,
              "Order-Number: %8.8d    Entry-Date: %2.2d-%2.2d-%4.4d
%2.2d:%2.2d:%2.2d  Carrier-Number: %2.2d<BR>"
              "Supply-W      Item-Id     Qty      Amount      Delivery-
Date<BR>",
              pOrderStatusData->o_id,
              pOrderStatusData->o_entry_d.day,
              pOrderStatusData->o_entry_d.month,
              pOrderStatusData->o_entry_d.year,
              pOrderStatusData->o_entry_d.hour,
              pOrderStatusData->o_entry_d.minute,
              pOrderStatusData->o_entry_d.second,
              pOrderStatusData->o_carrier_id);

for(i=0; i< pOrderStatusData->o.ol_cnt; i++)
{
    c += sprintf(szForm+c, " %4.4d      %6.6d      %2.2d
$%8.2f   %2.2d-%2.2d-%4.4d<BR>",
                 pOrderStatusData->OL[i].ol_supply_w_id,
                 pOrderStatusData->OL[i].ol_i_id,
                 pOrderStatusData->OL[i].ol_quantity,
                 pOrderStatusData->OL[i].ol_amount,
                 pOrderStatusData->OL[i].ol_delivery_d.day,
                 pOrderStatusData->OL[i].ol_delivery_d.month,
                 pOrderStatusData->OL[i].ol_delivery_d.year);
}

strncpy( szForm+c, szBR, (15-i)*5 );
c += (15-i)*5;

strcpy(szForm+c,
       "</font></PRE><HR><INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..NewOrder..\\">" 
       "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Payment..\\">" 
       "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Delivery..\\">" 
       "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Order-
Status..\\">" 
       "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Stock-
Level..\\">" 
       "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Exit..\\">" 
       "</BODY></FORM></HTML>" );
}

/* FUNCTION: MakeDeliveryForm
*
* COMMENTS: The internal client buffer is created when the terminal id is
assigned and should not
*                                be freed except when the client terminal id
is no longer needed.
*/
void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData, BOOL bInput, char
*szForm)
{
    int      c;
    c = wsprintf(szForm,
                 "<HTML><HEAD><TITLE>TPC-C Delivery</TITLE></HEAD><BODY>"
```

```

"<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
"  <INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">"
"  <INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"
"  <INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
"  <INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\">"
"  <INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
"  <PRE><font face=\"Courier\">
Delivery<BR>
Warehouse: %4.4d<BR> <BR>
(bInput && (pDeliveryData->exec_status_code != eOK)) ?
ERR_TYPE_DELIVERY_POST : 0,
DELIVERY_FORM, iTermId, Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);

if ( bInput )
{
    strcpy( szForm+c,
            "Carrier Number: <INPUT NAME=\"OCD\" SIZE=1><BR>
<BR> "
            "Execution Status: <BR> <BR> <BR> <BR> <BR>
<BR> "
            "</font></PRE><HR>
" <BR> <BR> <BR> <BR> <BR> <BR>
" <INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"Process..\\">" 
            "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"Menu..\\">" 
            "</BODY></FORM></HTML>" );
}
else
{
    wsprintf( szForm+c,
              "Carrier Number: %2.2d<BR> <BR>
              "Execution Status: %s <BR> <BR> <BR> <BR> <BR>
              <BR> <BR>
              " <BR> <BR> <BR> <BR> <BR> <BR>
              </font></PRE>
              "<HR><INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..NewOrder..\\">" 
              "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Payment..\\">" 
              "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Delivery..\\">" 
              "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Order-
Status..\\">" 
              "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Stock-
Level..\\">" 
              "<INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"..Exit..\\">" 
              "</BODY></FORM></HTML>" );
}

/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE: This function gets and validates the input data from the new
order form
*          filling in the required input variables. it then calls
the SQLNewOrder
```

```

/*
    transaction, constructs the output form and writes it
back to client
*/
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)
{
    PNEW_ORDER_DATA pNewOrder;
    pNewOrder = Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();

    ZeroMemory(pNewOrder, sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id = Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString, pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder = Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder, OUTPUT_FORM, szBuffer );
}

/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE:      This function gets and validates the input data from the payment
form
*               filling in the required input variables. It then calls
the SQLPayment
*               transaction, constructs the output form and writes it
back to client
*               browser.
*
* ARGUMENTS:    EXTENSION_CONTROL_BLOCK *pECB      passed in structure
pointer from inetsrv.
*               int
*               iTermId   client browser terminal id
*/
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA pPayment;
    pPayment = Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id = Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString, pPayment);

    Term.pClientData[iTermId].pTxn->Payment();

    pPayment = Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment, OUTPUT_FORM, szBuffer );
}

/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE:      This function gets and validates the input data from the Order
Status
*               form filling in the required input variables. It then
calls the
*               SQLOrderStatus transaction, constructs the output form
and writes it
*               back to client browser.
*/

```

```

/*
* ARGUMENTS:    EXTENSION_CONTROL_BLOCK      *pECB      passed in structure
pointer from inetsrv.
*               int
*               iTermId   client browser terminal id
*/
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;
    pOrderStatus = Term.pClientData[iTermId].pTxn->BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus, sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id = Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString, pOrderStatus);

    Term.pClientData[iTermId].pTxn->OrderStatus();

    pOrderStatus = Term.pClientData[iTermId].pTxn->BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus, OUTPUT_FORM, szBuffer );
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE:      This function gets and validates the input data from the
delivery form
*               filling in the required input variables. It then calls
the PostDeliveryInfo
*               Api, The client is then informed that the transaction
has been posted.
*
* ARGUMENTS:    EXTENSION_CONTROL_BLOCK      *pECB      passed in structure
pointer from inetsrv.
*               int
*               iTermId   client browser terminal id
*/
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB->lpszQueryString;
    PDELIVERY_DATA pDelivery;
    pDelivery = Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
    ZeroMemory(pDelivery, sizeof(DELIVERY_DATA));
    pDelivery->w_id = Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id      = GetIntKeyValue(&ptr, "OCD");
    ERR_DELIVERY_MISSING_OCD_KEY, ERR_DELIVERY_CARRIER_INVALIDID);
    if ( pDelivery->o_carrier_id > 10 || pDelivery->o_carrier_id < 1 )
        throw new CWEBCNTR_ERR( ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery->w_id, pDelivery->o_carrier_id)
    )
            pDelivery->exec_status_code = eDeliveryFailed;
        else
            pDelivery->exec_status_code = eOK;
    }
}

```

```

    }
    else // delivery is done synchronously if no delivery threads configured
        Term.pClientData[iTermId].pTxn->Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
*
* PURPOSE:      This function gets and validates the input data from the Stock
Level
*               form filling in the required input variables. It then
calls the
*               SQLStockLevel transaction, constructs the output form
and writes it
*               back to client browser.
*
* ARGUMENTS:    EXTENSION_CONTROL_BLOCK      *pECB      passed in structure
pointer from inetsrv.
*               int
*               iTermId   client browser terminal id
*/
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)
{
    char          *ptr = pECB->lpszQueryString;

    PSTOCK_LEVEL_DATA  pStockLevel;

    pStockLevel = Term.pClientData[iTermId].pTxn->BuffAddr_StockLevel();
    ZeroMemory( pStockLevel, sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id = Term.pClientData[iTermId].w_id;
    pStockLevel->d_id = Term.pClientData[iTermId].d_id;

    pStockLevel->threshold = GetIntKeyValue(&ptr, "TT**",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY, ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ( pStockLevel->threshold >= 100 || pStockLevel->threshold < 0 )
        throw new CWEBCNT_ERR( ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn->StockLevel();

    pStockLevel = Term.pClientData[iTermId].pTxn->BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
*
* PURPOSE:      This function extracts and validates the new order form data
from an http command string.
*
* ARGUMENTS:    LPSTR          lpszQueryString
*               client browser http command string
*               NEW_ORDER_DATA      *pNewOrderData
*               pointer to new order data structure
*/
void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA *pNewOrderData)
{

```

```

    char          szTmp[26];
    int           i;
    short         items;
    int           ol_i_id, ol_quantity;
    char          *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6] =
    {
        "SP00**", "SP01**", "SP02**", "SP03**", "SP04**",
        "SP05**", "SP06**", "SP07**", "SP08**", "SP09**",
        "SP10**", "SP11**", "SP12**", "SP13**", "SP14**"
    };
    static char szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
    {
        "IID00**", "IID01**", "IID02**", "IID03**", "IID04**",
        "IID05**", "IID06**", "IID07**", "IID08**", "IID09**",
        "IID10**", "IID11**", "IID12**", "IID13**", "IID14**"
    };
    static char szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
    {
        "Qty00**", "Qty01**", "Qty02**", "Qty03**", "Qty04**",
        "Qty05**", "Qty06**", "Qty07**", "Qty08**", "Qty09**",
        "Qty10**", "Qty11**", "Qty12**", "Qty13**", "Qty14**"
    };

    pNewOrderData->d_id = GetIntKeyValue(&ptr, "DID**",
ERR_NEWORDER_FORM_MISSING_DID, ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr, "CID**",
ERR_NEWORDER_CUSTOMER_KEY, ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS; i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp) )
                throw new CWEBCNT_ERR(
ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData->OL[items].ol_supply_w_id =
(short)atoi(szTmp);

            ol_i_id = pNewOrderData->OL[items].ol_i_id =
GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY, ERR_NEWORDER_ITEMID_INVALID);
            if ( ol_i_id > 99999 || ol_i_id < 1 )
                throw new CWEBCNT_ERR(
ERR_NEWORDER_ITEMID_RANGE );

            ol_quantity = pNewOrderData->OL[items].ol_quantity =
GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY, ERR_NEWORDER_QTY_INVALID);
            if ( ol_quantity > 99 || ol_quantity < 1 )
                throw new CWEBCNT_ERR(
ERR_NEWORDER_QTY_RANGE );
        }
        items++;
    }
    else
    {
        // nothing entered for supply warehouse, so item id
        GetKeyValue(&ptr, szIID[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_IID_KEY);
        if ( szTmp[0] )
            throw new CWEBCNT_ERR(
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );

        GetKeyValue(&ptr, szQty[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_QTY_KEY);
    }
}

```

```

        if ( szTmp[0] )
            throw new CWEBCLNT_ERR(
ERR_NEWORDER_QTY_WITHOUT_SUPPW );
    }
    if ( items == 0 )
        throw new CWEBCLNT_ERR( ERR_NEWORDER_NOITEMS_ENTERED );
    pNewOrderData->o.ol_cnt = items;
}

/* FUNCTION: GetPaymentData
*
* PURPOSE:      This function extracts and validates the payment form data from
an http command string.
*
* ARGUMENTS:    LPSTR                      lpszQueryString
*               client browser http command string
*               PAYMENT_DATA          *pPaymentData
*               pointer to payment data structure
*/
void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA *pPaymentData)
{
    char      szTmp[26];
    char      *ptr = lpszQueryString;
    BOOL      bCustIdBlank;

    pPaymentData->d_id = GetIntKeyValue(&ptr, "DID*", 
ERR_PAYMENT_MISSING_DID_KEY, ERR_PAYMENT_DISTRICT_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        bCustIdBlank = TRUE;
        pPaymentData->c_id = 0;
    }
    else
    {
        // parse customer id and verify that last name was NOT entered
        bCustIdBlank = FALSE;
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR( ERR_PAYMENT_CUSTOMER_INVALID );
    }
    pPaymentData->c_id = atoi(szTmp);

    pPaymentData->c_w_id = GetIntKeyValue(&ptr, "CWI*", 
ERR_PAYMENT_MISSING_CWI_KEY, ERR_PAYMENT_CWI_INVALID);
    pPaymentData->c_d_id = GetIntKeyValue(&ptr, "CDI*", 
ERR_PAYMENT_MISSING_CDI_KEY, ERR_PAYMENT_CDI_INVALID);

    if ( bCustIdBlank )
    {
        // customer id is blank, so last name must be entered
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNT_ERR( ERR_PAYMENT_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(pPaymentData->c_last) > LAST_NAME_LEN )
            throw new CWEBCLNT_ERR( ERR_PAYMENT_LAST_NAME_TO_LONG );
    }
}

```

```

        strcpy(pPaymentData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was NOT entered
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCLNT_ERR( ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_HAM_KEY);
    if ( !IsDecimal(szTmp) )
        throw new CWEBCLNT_ERR( ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 || pPaymentData->h_amount < 0 )
        throw new CWEBCLNT_ERR( ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
*
* PURPOSE:      This function extracts and validates the payment form data from
an http command string.
*/
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA *pOrderStatusData)
{
    char      szTmp[26];
    char      *ptr = lpszQueryString;

    pOrderStatusData->d_id = GetIntKeyValue(&ptr, "DID*", 
ERR_ORDERSTATUS_MISSING_DID_KEY, ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNT_ERR( 
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(pOrderStatusData->c_last) > LAST_NAME_LEN )
            throw new CWEBCLNT_ERR( ERR_ORDERSTATUS_CLT_RANGE );
        strcpy(pOrderStatusData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR( ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id = atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCLNT_ERR( 
ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)

```

```

/*
 * PURPOSE: This function determines if a string is numeric. It fails if any
characters other than numeric and null terminator are present.
 *
 * ARGUMENTS: char *ptr pointer to string to check.
 *
 * RETURNS: BOOL FALSE if string is not all numeric
 * TRUE if string contains only numeric characters i.e. '0' - '9'
 */
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
 *
 * PURPOSE: This function determines if a string is a non-negative decimal
value.
 * It fails if any characters other than a series of numbers followed by
 * a decimal point, another series of numbers, and a null
terminator are present.
 *
 * ARGUMENTS: char *ptr pointer to string to check.
 *
 * RETURNS: BOOL FALSE if string is not a valid non-
negative decimal value
 * TRUE if string is OK
 */
BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if (dotptr == NULL)
        // no decimal point, so just check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if ( *(dotptr+1) == 0 )
        return FALSE; // nothing but a decimal point is bad
    else
        bValid = TRUE;
}

```

```

    if ( *(dotptr+1) != 0 )
        // check text after decimal point
        bValid &= IsNumeric(dotptr+1);

    *dotptr = '.'; // replace decimal point
    return bValid;
}

```

tpcc.def

LIBRARY TPCC.DLL

EXPORTS

```

GetExtensionVersion @1
HttpExtensionProc @2
TerminateExtension @3

```

tpcc.h

```

/* FILE: TPCC.H Microsoft TPC-C Kit Ver. 4.20.000
 * Copyright Microsoft, 1999
 * All Rights Reserved
 *
 * Version 4.10.000 audited by Richard Gimarc,
 * Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for ISAPI TPCC.DLL, defines structures and functions
used in the isapi tpcc.dll.
 *
 */

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE 101
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101

#define TP_MAX_RETRIES 50

//note that the welcome form must be processed first as terminal ids assigned here,
once the
//terminal id is assigned then the forms can be processed in any order.
#define WELCOME_FORM 1
    //beginning form no term id assigned, form id
#define MAIN_MENU_FORM 2
    //term id assigned main menu form id
#define NEW_ORDER_FORM 3
    //new order form id
#define PAYMENT_FORM 4
    //payment form id
#define DELIVERY_FORM 5
    //delivery form id
#define ORDER_STATUS_FORM 6
    //order status id

```

```

#define STOCK_LEVEL_FORM 7
    //stock level form id

//This macro is used to prevent the compiler error unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep distinct for each terminal or
client connection.
typedef struct _CLIENTDATA
{
    int                     iNextFree;
    //index of next free element or -1 if this entry in use.
    int                     w_id;
    //warehouse id assigned at welcome form
    int                     d_id;
    //district id assigned at welcome form

    int                     iSyncId;
    //synchronization id
    int                     iTickCount;
    //time of last access;

    CTPCC_BASE             *pTxn;

} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational interface for terminal id support
typedef struct _TERM
{
    int                     iNumEntries;
    //total allocated terminal array entries
    int                     iFreeList;
    //next available terminal array element or -1 if none
    int                     iMasterSyncId;
    //synchronization id
    CLIENTDATA              *pClientData;
    //pointer to allocated client data
} TERM;

typedef TERM *PTERM;
    //pointer to terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADDLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,
    ERR_NEWORDER_CUSTOMER_INVALID,

```

```

ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_DISTRICT_INVALID,
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_ITEMID_INVALID,
ERR_NEWORDER_ITEMID_RANGE,
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_INVALID,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CDI_INVALID,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNTErr : public CBaseErr
{
public:
    CWEBCLNTErr(WEBERROr Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    }

    CWEBCLNTErr(WEBERROr Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new char[strlen(szTextDetail)+1];

```

```

        strcpy( m_szTextDetail, szTextDetail );
        m_SystemErr = dwSystemErr;
        m_szErrorText = NULL;
    }

~CWEBCLNT_ERR()
{
    if (m_szTextDetail != NULL)
        delete [] m_szTextDetail;
    if (m_szErrorText != NULL)
        delete [] m_szErrorText;
}

WEBERROR m_Error;
char      *m_szTextDetail;      //
char      *m_szErrorText;
DWORD     m_SystemErr;

int ErrorType() {return ERR_TYPE_WEBDLL;};
int ErrorNum() {return m_Error;};
char *ErrorText();

};

//These constants have already been defined in engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START          2
#define TXN_EVENT_STOP           4
#define TXN_EVENT_WARNING         6           //used to record a warning into
the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int *pCmd, int *pFormId, int
*pTermId, int *pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int iError, int iErrorType, char
*szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax, WEBERROR
err);
int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR NoKeyErr, WEBERROR
NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int iErrorNum, int iTermId,
int iSyncId, char *szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA *pStockLevelData, BOOL bInput,
char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA *pNewOrderData, BOOL bInput, char
*szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData, BOOL bInput, char
*szForm);
void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA *pOrderStatusData, BOOL
bInput, char *szForm);

```

```

void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData, BOOL bInput, char
*szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(short w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);

```

tpcc.rc

```

//Microsoft Developer Studio generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
///////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

///////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS
///////////////////////////////

// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#ifndef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif //__WIN32

#ifndef __MAC
///////////////////////////////
//
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#ifndef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L

```

```

BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C HTML DLL Server (DBLIB)\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "TPC-C HTML DLL Server (DBLIB)\0"
            VALUE "FileVersion", "0, 4, 0, 0\0"
            VALUE "InternalName", "tpcc\0"
            VALUE "LegalCopyright", "Copyright © 1997\0"
            VALUE "OriginalFilename", "tpcc.dll\0"
            VALUE "ProductName", "Microsoft tpcc\0"
            VALUE "ProductVersion", "0, 4, 0, 0\0"
        END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END
#endif // !_MAC

#ifndef APSTUDIO_INVOKED
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"afxres.h\"\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END
#endif // APSTUDIO_INVOKED

// Dialog
//
IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION | WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON   "OK",IDOK,129,7,50,14
    PUSHBUTTON      "Cancel",IDCANCEL,129,24,50,14

```

```

END

// DESIGNINFO
//
#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
#endif // APSTUDIO_INVOKED
#endif // English (U.S.) resources
#endif // APSTUDIO_INVOKED
// Generated from the TEXTINCLUDE 3 resource.
//

#endif // not APSTUDIO_INVOKED

```

tpcc_com.cpp

```

/*      FILE:          TPCC_COM.CPP
*                                         Microsoft TPC-C Kit Ver. 4.20.000
*                                         Copyright Microsoft, 1999
*                                         All Rights Reserved
*
*                                         not yet audited
*
*      PURPOSE:  Source file for TPC-C COM+ class implementation.
*      Contact: Charles Levine (clevine@microsoft.com)
*
*      Change history:
*                                         4.20.000 - first version
*/
// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec( dllexport )

```

```

#include "../common/src/trans.h"           //tpckit transaction header
contains definations of structures specific to TPC-C
#include "../common/src/error.h"
#include "../common/src/txm_base.h"
#include "tpcc_com.h"

#include "../tpcc_com_ps/src/tpcc_com_ps_i.c"
#include "../tpcc_com_all/src/tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL bSinglePool)
{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray = SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray->pvData, 0, ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL, COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same component
        m_pPayment = m_pNewOrder;
        m_pStockLevel = m_pNewOrder;
        m_pOrderStatus = m_pNewOrder;
    }
    else
    {
        // use different components for each txn
    }
}

```

```

    hr = CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
    if (FAILED(hr))
        throw new CCOMERR(hr);

    hr = CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
    if (FAILED(hr))
        throw new CCOMERR(hr);

    hr = CoCreateInstance(CLSID_StockLevel, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pStockLevel);
    if (FAILED(hr))
        throw new CCOMERR(hr);

    hr = CoCreateInstance(CLSID_OrderStatus, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pOrderStatus);
    if (FAILED(hr))
        throw new CCOMERR(hr);

    // call setcomplete to release each component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pStockLevel->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

CTPCC_COM::~CTPCC_COM()
{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

void CTPCC_COM::NewOrder()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pNewOrder->NewOrder(m_vTxn, &vTxn_out);
    if (FAILED(hr))

```

```

        throw new CCOMERR( hr );
        memcpy(m_pTxn, (void *)vTxn_out.parray->pvData,vTxn_out.parray-
>rgsabound[0].cElements);
        SafeArrayDestroy(vTxn_out.parray);

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
    }

void CTPCC_COM::Payment()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray->pvData,vTxn_out.parray-
>rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}

void CTPCC_COM::StockLevel()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pStockLevel->StockLevel(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray->pvData,vTxn_out.parray-
>rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}

void CTPCC_COM::OrderStatus()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pOrderStatus->OrderStatus(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray->pvData,vTxn_out.parray-
>rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}

```

tpcc_com.h

```

/*      FILE:          TPCC_COM.H
*      Microsoft TPC-C Kit Ver. 4.20.000
*      Copyright Microsoft, 1999
*      All Rights Reserved
*      not yet audited

```

```

/*
*      PURPOSE: Header file for TPC-C COM+ class implementation.
*
*      Change history:
*          4.20.000 - first version
*/
#pragma once

#include <stdio.h>
#include "..\..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class CCOMERR : public CBaseErr
{
private:
    char m_szErrorText[64];

public:
    // use this interface for genuine COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to impersonate a non-COM error type
    CCOMERR( int iErrorType, int iError )
    {
        m_iErrorType = iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int             m_hr;
    int             m_iErrorType;
    int             m_iError;

    // A CCOMERR class can impersonate another class, which happens
    // if the error
    // was not actually a COM Services error, but was simply
    // transmitted back via COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return ERR_TYPE_COM;
        else
            return m_iErrorType;
    }

    int ErrorNum() {return m_hr; }

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf( m_szErrorText, "Error: Class %d,
error # %d", m_iErrorType, m_iError );
    }
}

```

```

        else
            sprintf( m_szErrorText, "Error: COM HRESULT
%x", m_hr );
    }

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC* m_pNewOrder;
    ITPCC* m_pPayment;
    ITPCC* m_pStockLevel;
    ITPCC* m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA NewOrder;
            PAYMENT_DATA Payment;
            DELIVERY_DATA Delivery;
            STOCK_LEVEL_DATA StockLevel;
            ORDER_STATUS_DATA OrderStatus;
        } u;
    } *m_pTxn;

    VARIANT m_vTxn;
public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA BuffAddr_NewOrder()
    { return &m_pTxn->u.NewOrder; }
    inline PPAYMENT_DATA BuffAddr_Payment()
    { return &m_pTxn->u.Payment; }
    inline PDELIVERY_DATA BuffAddr_Delivery()
    { return &m_pTxn->u.Delivery; }
    inline PSOCK_LEVEL_DATA BuffAddr_StockLevel()
    { return &m_pTxn->u.StockLevel; }
    inline PORDER_STATUS_DATA BuffAddr_OrderStatus()
    { return &m_pTxn->u.OrderStatus; }

    void NewOrder();
    void Payment();
    void StockLevel();
    void OrderStatus();
    void Delivery();

} // not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

```

```

    }

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

```

tpcc_com_all.cpp

```

/*
 *      FILE:          TPCC_COM_ALL.CPP
 *                      Microsoft TPC-C Kit Ver. 4.20.000
 *                      Copyright Microsoft, 1999
 *
 *                      All Rights Reserved
 *
 *                      Version 4.10.000 audited by Richard Gimarc,
 *                      Performance Metrics, 3/17/99
 *
 *      PURPOSE: Implementation for TPC-C Tuxedo class.
 *      Contact: Charles Levine (clevine@microsoft.com)
 *
 *      Change history:
 *                      4.20.000 - updated rev number to match kit
 */

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREAD

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>
#include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqatypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"
//tpckit transaction header contains definitions of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\db_dblib_dll\src\tpcc_dblib.h"           // DBLIB implementation
of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"           // ODBC implementation
of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"

```

```

#include "../../tpcc_com_ps/src/tpcc_com_ps_i.c"
#include "../../../common/src/ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
    OBJECT_ENTRY(CLSID_TPCC, CTPCC)
    OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
    OBJECT_ENTRY(CLSID_OrderStatus, COrderStatus)
    OBJECT_ENTRY(CLSID_Payment, CPayment)
    OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCREGISTRYDATA Reg;
char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

///////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID *lpReserved*)
{
    char szDllName[128];

    try
    {
        if (dwReason == DLL_PROCESS_ATTACH)
        {
            _Module.Init(ObjectMap, hInstance);
            DisableThreadLibraryCalls(hInstance);

            DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
            GetComputerName(szMyComputerName, &dwSize);
            szMyComputerName[dwSize] = 0;

            if ( ReadTPCCRegistrySettings( &Reg ) )
                throw new CCOMPONENT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

            if (Reg.eDB_Protocol == DBLIB)
            {
                strcpy( szDllName, Reg.szPath );
                strcat( szDllName, "tpcc_dblib.dll" );
                hLibInstanceDb = LoadLibrary( szDllName );
                if (hLibInstanceDb == NULL)
                    throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
            }
        }
    }
}

```

```

        // get function pointer to wrapper for class
constructor
pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb,"CTPCC_ODBC_new");
if (pCTPCC_ODBC_new == NULL)
    throw new CCOMPONENT_ERR(
ERR_UNREGISTERED_CLASS );

// get function pointer to wrapper for class
constructor
pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
GetProcAddress(hLibInstanceDb,"CTPCC_DBLIB_new");
if (pCTPCC_DBLIB_new == NULL)
    throw new CCOMPONENT_ERR(
ERR_UNREGISTERED_CLASS );

// Used to determine whether the DLL can be unloaded by OLE
STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK : S_FALSE;
}

// Returns a class factory to create an object of the requested type
STDAPI DllGetClassObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid, ppv);
}

// DllRegisterServer - Adds entries to the system registry

```

```

STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

// DllUnregisterServer - Removes entries from the system registry

STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL, TEXT("tpcc_com_all.dll"));

    _sprintf(szMsg, TEXT("Error in COM+ TPC-C Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event source
                    EVENTLOG_ERROR_TYPE, // event type
                    0, // event category
                    0, // event ID
                    NULL, // current user's SID
                    2, // strings in lpszStrings
                    0, // no bytes of raw data
                    (LPCTSTR *)lpszStrings, // array of error strings
                    NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*/
char* CCOMPONENT_ERR::ErrorText(void)
{
    static SERRORMSG errorMsgs[] =
    {

```

```

        { ERR_MISSING_REGISTRY_ENTRIES,
          "Required entries
          missing from registry."
        },
        { ERR_LOADDLL_FAILED,
          "Load of DLL
          failed. DLL="
        },
        { ERR_GETPROCADDR_FAILED,
          "Could not map proc in
          DLL. GetProcAddress error. DLL="
        },
        { ERR_UNKNOWN_DB_PROTOCOL,
          "Unknown database
          protocol specified in registry."
        },
        { 0,
          ""
        };
    }

    char szTmp[256];
    int i = 0;
    while (TRUE)
    {
        if (errorMsgs[i].szMsg[0] == 0)
        {
            strcpy( szTmp, "Unknown error number." );
            break;
        }
        if (m_Error == errorMsgs[i].iError)
        {
            strcpy( szTmp, errorMsgs[i].szMsg );
            break;
        }
        i++;
    }

    if (m_szTextDetail)
        strcat( szTmp, m_szTextDetail );
    if (m_SystemErr)
        wsprintf( szTmp+strlen(szTmp), " Error=%d", m_SystemErr );

    m_szErrorText = new char[strlen(szTmp)+1];
    strcpy( m_szErrorText, szTmp );
    return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{
    if (m_pTxn)
        delete m_pTxn;
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;

    // get our object context
    HRESULT hr = CoGetObjectContext( IID_IObjectContext, (void
**) &pObjectContext );
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
}

```

```

        return hr;
    }

    // called by the ctor activator
    // STDMETHODIMP CTPCC_Common::Construct(IDispatch * pUnk)
    {
        // Code to access construction string, if needed later...
        // if (!pUnk)
        //     return E_UNEXPECTED;
        // IObjectConstructString * pString = NULL;
        // HRESULT hr = pUnk->QueryInterface(IID_IObjectConstructString,
(void **)&pString);
        // pString->Release();

        try
        {
            if (Reg.eDB_Protocol == ODBC)
                m_pTxn = pCTPCC_ODBC_new( Reg.szDbServer,
Reg.szDbUser, Reg.szDbPassword, szMyComputerName, Reg.szDbName );
            else if (Reg.eDB_Protocol == DBLIB)
                m_pTxn = pCTPCC_DBLIB_new( Reg.szDbServer,
Reg.szDbUser, Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        }
        catch (CBaseErr *e)
        {
            WriteMessageToEventLog(e->ErrorText());
            delete e;
            return E_FAIL;
        }
        catch (...)
        {
            WriteMessageToEventLog(TEXT("Unhandled exception in object
::Construct"));
            return E_FAIL;
        }
        return S_OK;
    }

    HRESULT CTPCC_Common::NewOrder(VARIANT txn_in, VARIANT* txn_out)
    {
        PNEW_ORDER_DATA      pNewOrder;
        COM_DATA             *pData;
        try
        {
            pData = (COM_DATA*)txn_in.parray->pvData;
            pNewOrder = m_pTxn->BuffAddr_NewOrder();

            memcpy(pNewOrder, &pData->u.NewOrder, sizeof(NEW_ORDER_DATA));

            m_pTxn->NewOrder();           // do the actual txn

            VariantInit(txn_out);
            txn_out->vt = VT_SAFEARRAY;
            txn_out->parray = SafeArrayCreateVector(VT_UI1,
>rgsabound->cElements,
                                                txn_in.parray-
>rgsabound->cElements);
            pData = (COM_DATA*) txn_out->parray->pvData;
        }
        memcpy( &pData->u.NewOrder, pNewOrder, sizeof(NEW_ORDER_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }

    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is
toast
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum() ==
10005)) ||
            ((e->ErrorType() == ERR_TYPE_ODBC) && (e->ErrorNum() ==
10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::Payment(VARIANT txn_in, VARIANT* txn_out)
{
    PPAYMENT_DATA          pPayment;
    COM_DATA               *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray->pvData;
        pPayment = m_pTxn->BuffAddr_Payment();

        memcpy(pPayment, &pData->u.Payment, sizeof(PAYMENT_DATA));

        m_pTxn->Payment();           // do the actual txn

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray = SafeArrayCreateVector( VT_UI1,
txn_in.parray-
>rgsabound->cElements,
                                                txn_in.parray-
>rgsabound->cElements);
        pData = (COM_DATA*) txn_out->parray->pvData;

        memcpy( &pData->u.Payment, pPayment, sizeof(PAYMENT_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is
toast
    }
}

```

```

10005)) ||
        ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum() ==
== 10054)) )
    {
        m_bCanBePooled = FALSE;
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in, VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA pStockLevel;
    COM_DATA *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray->pvData;
        pStockLevel = m_pTxn->BuffAddr_StockLevel();
        memcpy(pStockLevel, &pData->u.StockLevel,
        sizeof(STOCK_LEVEL_DATA));
        m_pTxn->StockLevel();
        VariantInit(txn_out);
        txn_out->vt = VT_SAFARRAY;
        txn_out->parray = SafeArrayCreateVector( VT_UI1,
        >rgsabound->cElements,
        >rgsabound->cElements);
        pData = (COM_DATA*)txn_out->parray->pvData;
        memcpy( &pData->u.StockLevel, pStockLevel,
        sizeof(STOCK_LEVEL_DATA));
        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is
toast
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum() ==
10005)) ||
            ((e->ErrorType() == ERR_TYPE_ODBC) && (e->ErrorNum() ==
== 10054)) )
            m_bCanBePooled = FALSE;
        pData->retval = e->ErrorType();
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
    }
}

```

```

    pData->error = 0;
    m_bCanBePooled = FALSE;
    return E_FAIL;
}
}

```

tpcc_com_all.def

; tpcc_com_all.def : Declares the module parameters.

```

LIBRARY      "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow      @1 PRIVATE
    DllGetClassObject     @2 PRIVATE
    DllRegisterServer     @3 PRIVATE
    DllUnregisterServer   @4 PRIVATE

```

tpcc_com_all.dsp

```

# Microsoft Developer Studio Project File - Name="tpcc_com_all" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=tpcc_com_all - Win32 Debug
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_all.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_all.mak" CFG="tpcc_com_all - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc_com_all - Win32 Release" (based on "Win32 (x86) Dynamic-Link
Library")
!MESSAGE "tpcc_com_all - Win32 Debug" (based on "Win32 (x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF  "$(CFG)" == "tpcc_com_all - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0


```

```

# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD
/c
# ADD CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 ..\db_dblib_dll\bin\tpcc_dblib.lib ..\db_odbc_dll\bin\tpcc_odbc.lib
kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uid.lib odbc32.lib odbccp32.lib /nologo /subsystem:windows
/dll /machine:I386

!ELSEIF  "$(CFG)" == "tpcc_com_all - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/YX /FD /c
# ADD CPP /nologo /MTd /W3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX
/FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /dll /debug /machine:I386 /pdbtype:sept
# ADD LINK32 ..\db_dblib_dll\bin\tpcc_dblib.lib ..\db_odbc_dll\bin\tpcc_odbc.lib
kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uid.lib odbc32.lib odbccp32.lib /nologo /subsystem:windows
/dll /debug /machine:I386 /pdbtype:sept

!ENDIF

# Begin Target

# Name "tpcc_com_all - Win32 Release"
# Name "tpcc_com_all - Win32 Debug"
# Begin Group "Source"

```

```

# PROP Default_Filter "*.cpp, *.c"
# Begin Source File

SOURCE=.\\src\\tpcc_com_all.cpp
# SUBTRACT CPP /IX
# End Source File
# Begin Source File

SOURCE=.\\src\\tpcc_com_all.def
# End Source File
# Begin Source File

SOURCE=.\\src\\tpcc_com_all.idl

!IF "$(CFG)" == "tpcc_com_all - Win32 Release"

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\\src\\tpcc_com_all.idl

BuildCmds= \
    midl /Oicf /h "tpcc_com_all.h" /iid "tpcc_com_all_i.c" \
    ".\\src\\tpcc_com_all.idl" /out ".\\src"

".\\src\\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)" \
    $(BuildCmds)

".\\src\\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)" \
    $(BuildCmds)

".\\src\\tpcc_com_all_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)" \
    $(BuildCmds)
# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_all - Win32 Debug"

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\\src\\tpcc_com_all.idl

BuildCmds= \
    midl /Oicf /h "tpcc_com_all.h" /iid "tpcc_com_all_i.c" \
    ".\\src\\tpcc_com_all.idl" /out ".\\src"

".\\src\\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)" \
    $(BuildCmds)

".\\src\\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)" \
    $(BuildCmds)

".\\src\\tpcc_com_all_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)" \
    $(BuildCmds)
# End Custom Build

!ENDIF

# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*.*"
# Begin Source File

```

```

SOURCE=.\\src\\Methods.h
# End Source File
# Begin Source File

SOURCE=.\\src\\resource.h
# End Source File
# End Group
# Begin Source File

SOURCE=.\\src\\tpcc_com_all.rc
# End Source File
# End Target
# End Project

```

tpcc_com_all.h

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:14 2001
*/
/* Compiler settings for .\\src\\tpcc_com_all.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany), __declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__

```

```

#define __NewOrder_FWD_DEFINED__

#ifndef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

#ifndef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifndef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

#ifndef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "aidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifndef __cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

```

```

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#ifndef __TPCCLib_LIBRARY_DEFINED__
#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;
EXTERN_C const CLSID CLSID_TPCC;

#ifndef __cplusplus

class DECLSPEC_UUID("122A3128-2520-11D3-BA71-00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifndef __cplusplus

class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifndef __cplusplus

class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifndef __cplusplus

class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifndef __cplusplus

class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-00C04FBFE08B")
StockLevel;
#endif

#endif /* __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

```

```

#ifndef __cplusplus
}
#endif
#endif



---



### tpcc_com_all.idl



---



```

/* FILE: TPCC.IDL
*
* Microsoft TPC-C Kit Ver. 4.20.000
* Copyright Microsoft, 1999
*
* All Rights Reserved
*
* not yet audited
*
* PURPOSE: IDL source for TPCC.dll. This file is processed by the MIDL
tool to
* produce the type library (TPCC.tlb) and
marshalling code.
*
* Change history:
* 4.20.000 - first version
*/

```



```

interface TPCC;
interface NewOrder;
interface OrderStatus;
interface Payment;
interface StockLevel;

import "oaidl.idl";
import "ocidl.idl";
import "..\tpcc_com_ps\src\tpcc_com_ps.idl";

[
 uuid(122A3117-2520-11D3-BA71-00C04FBFE08B),
 version(1.0),
 helpstring("TPC-C 1.0 Type Library")
]
library TPCLib
{
 importlib("stdole32.tlb");
 importlib("stdole2.tlb");

 [
 uuid(122A3128-2520-11D3-BA71-00C04FBFE08B),
 helpstring("All Txns Class")
]
coclass TPCC
{
 [default] interface ITPCC;
};

[
 uuid(975BAABF-84A7-11D2-BA47-00C04FBFE08B),
 helpstring("NewOrder Class")
]

```


```

```

coclass NewOrder
{
    [default] interface ITPCC;
};

[
    uuid(266836AD-A50D-11D2-BA4E-00C04FBFE08B),
    helpstring("OrderStatus Class")
]
coclass OrderStatus
{
    [default] interface ITPCC;
};

[
    uuid(CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B),
    helpstring("Payment Class")
]
coclass Payment
{
    [default] interface ITPCC;
};

[
    uuid(2668369E-A50D-11D2-BA4E-00C04FBFE08B),
    helpstring("StockLevel Class")
]
coclass StockLevel
{
    [default] interface ITPCC;
};

```

tpcc_com_all.rc

```

//Microsoft Developer Studio generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
/////////////////////////////////////////////////////////////////////////////
// Generated from the TEXTINCLUDE 2 resource.
//
#include "winres.h"

/////////////////////////////////////////////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS
/////////////////////////////////////////////////////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#define _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif ///_WIN32

```

```

#ifndef APSTUDIO_INVOKED
///////////////
// TEXTINCLUDE
// TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"winres.h\"\r\n"
    "\0"
END

TEXTINCLUDE DISCARDABLE
BEGIN
    "1 TYPELIB \"tpcc_com_all.tlb\"\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

#ifndef _MAC
///////////////
// Version
// VS_VERSION_INFO VERSIONINFO
FILEVERSION 1,0,0,1
PRODUCTVERSION 1,0,0,1
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEEOS 0x4L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904B0"
BEGIN
VALUE "CompanyName", "\0"
VALUE "FileDescription", "tpcc_com_all Module\0"
VALUE "FileVersion", "1, 0, 0, 1\0"
VALUE "InternalName", "TPCCNEWORDER\0"
VALUE "LegalCopyright", "Copyright 1997\0"
VALUE "OriginalFilename", "tpcc_com_all.DLL\0"
VALUE "ProductName", "tpcc_com_all Module\0"
VALUE "ProductVersion", "1, 0, 0, 1\0"
VALUE "OLESelfRegister", "\0"
END
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200

```

```

END
#endif // !_MAC

///////////////
// REGISTRY
// IDR_TPCC      REGISTRY DISCARDABLE "tpcc_com_all.rgs"
IDR_NEWORDER   REGISTRY DISCARDABLE "tpcc_com_no.rgs"
IDR_ORDERSTATUS REGISTRY DISCARDABLE "tpcc_com_os.rgs"
IDR_PAYMENT    REGISTRY DISCARDABLE "tpcc_com_pay.rgs"
IDR_STOCKLEVEL REGISTRY DISCARDABLE "tpcc_com_sl.rgs"

///////////////
// String Table
// STRINGTABLE DISCARDABLE
BEGIN
IDS_PROJNAME      "tpcc_com_all"
END

#endif // English (U.S.) resources
///////////////

#ifndef APSTUDIO_INVOKED
///////////////
// Generated from the TEXTINCLUDE 3 resource.
// 1 TYPELIB "tpcc_com_all.tlb"
#endif // not APSTUDIO_INVOKED



---



## tpcc_com_all.rgs



```

HKCR
{
 TPCC.AllTxns.1 = s 'All Txns Class'
 {
 CLSID = s '{122A3128-2520-11D3-BA71-00C04FBFE08B}'
 }
 TPCC.AllTxns = s 'TPCC Class'
 {
 CurVer = s 'TPCC.AllTxns.1'
 }
 NoRemove CLSID
 {
 ForceRemove {122A3128-2520-11D3-BA71-00C04FBFE08B} = s 'TPCC
Class'
 {
 ProgID = s 'TPCC.AllTxns.1'
 VersionIndependentProgID = s 'TPCC.AllTxns'
 }
 }
}

```


```

```

        InprocServer32 = s '%MODULE%'
        {
            val ThreadingModel = s 'Both'
        }
    }
}



---



## tpcc_com_all_i.c



---



```

#pragma warning(disable: 4049) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:14 2001
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
 Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
 error checks: allocation ref bounds_check enum stub_data
 VC _declspec() decoration level:
 __declspec(uuid()), __declspec(selectany), __declspec(novtable)
 DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING()

#if !defined(_M_IA64) && !defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
 DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct _IID
{
 unsigned long x;
 unsigned short s1;

```


```

```

        unsigned short s2;
        unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}};

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
CLSID_TPCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* !_MIDL_USE_GUIDDEF */

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:14 2001
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run, appending), ms_ext, c_ext, robust
   error checks: allocation ref bounds_check enum stub_data

```

```

VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()

*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct __IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}};

#endif // !_MIDL_USE_GUIDDEF_


MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

```

```

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#ifndef MIDL_DEFINE_GUID
#endif

#ifndef __cplusplus
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64) */

```

tpcc_com_no.rgs

```

HKCR
{
    TPCC.NewOrder.1 = s 'NewOrder Class'
    {
        CLSID = s '{975BAABF-84A7-11D2-BA47-00C04FBFE08B}'
    }
    TPCC.NewOrder = s 'NewOrder Class'
    {
        CurVer = s 'TPCC.NewOrder.1'
    }
    NoRemove CLSID
    {
        ForceRemove {975BAABF-84A7-11D2-BA47-00C04FBFE08B} = s 'NewOrder
Class'
    }
    {
        ProgID = s 'TPCC.NewOrder.1'
        VersionIndependentProgID = s 'TPCC.NewOrder'
        InprocServer32 = s '%MODULE%'
        {
            val ThreadingModel = s 'Both'
        }
    }
}

```

tpcc_com_os.rgs

```

HKCR
{
    TPCC.OrderStatus.1 = s 'OrderStatus Class'
    {
        CLSID = s '{266836AD-A50D-11D2-BA4E-00C04FBFE08B}'
    }
}

```

```

TPCC.OrderStatus = s 'OrderStatus Class'
{
    CurVer = s 'TPCC.OrderStatus.1'
}
NoRemove CLSID
{
    ForceRemove {266836AD-A50D-11D2-BA4E-00C04FBFE08B} = s
'OrderStatus Class'
{
    ProgID = s 'TPCC.OrderStatus.1'
    VersionIndependentProgID = s 'TPCC.OrderStatus'
    InprocServer32 = s '%MODULE%'
    {
        val ThreadingModel = s 'Both'
    }
}
}
}

```

tpcc_com_pay.rgs

```

HKCR
{
    TPCC.Payment.1 = s 'Payment Class'
    {
        CLSID = s '{CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B}'
    }
    TPCC.Payment = s 'Payment Class'
    {
        CurVer = s 'TPCC.Payment.1'
    }
    NoRemove CLSID
    {
        ForceRemove {CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B} = s 'Payment
Class'
        {
            ProgID = s 'TPCC.Payment.1'
            VersionIndependentProgID = s 'TPCC.Payment'
            InprocServer32 = s '%MODULE%'
            {
                val ThreadingModel = s 'Both'
            }
        }
    }
}

```

tpcc_com_ps.def

```

LIBRARY      "tpcc_com_ps"
DESCRIPTION   'Proxy/Stub DLL'
EXPORTS
    DllGetClassObject      @1  PRIVATE
    DllCanUnloadNow        @2  PRIVATE
    GetProxyDllInfo        @3  PRIVATE
    DllRegisterServer      @4  PRIVATE
    DllUnregisterServer    @5  PRIVATE

```

tpcc_com_ps.dsp

```

# Microsoft Developer Studio Project File - Name="tpcc_com_ps" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Application" 0x0101

CFG=tpcc_com_ps - Win32 Debug
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_ps.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_ps.mak" CFG="tpcc_com_ps - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc_com_ps - Win32 Release" (based on "Win32 (x86) Application")
!MESSAGE "tpcc_com_ps - Win32 Debug" (based on "Win32 (x86) Application")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF     "$(CFG)" == "tpcc_com_ps - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D _WIN32_WINNT=0x0400 /D
"REGISTER_PROXY_DLL" /FD /c
# SUBTRACT CPP /YX
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbc32.lib
/nologo /subsystem:windows /machine:I386

```

```

# ADD LINK32 kernel32.lib rpcndr.lib rpcns4.lib rpcrt4.lib oleaut32.lib uuid.lib
/nologo /entry:"DllMain" /subsystem:windows /dll /pdb:none /machine:I386
/def:".src\tpcc_com_ps.def"
# Begin Custom Build - Copying tpcc_com_ps.h
InputPath=.bin\tpcc_com_ps.dll
SOURCE=$(InputPath)

"..\tpcc_com_all\src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
    copy .src\tpcc_com_ps.h ..\tpcc_com_all\src\

# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_ps - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX
/FD /c
# ADD CPP /nologo /ZI /Od /D "WIN32" /D "_DEBUG" /D _WIN32_WINNT=0x0400 /D
"REGISTER_PROXY_DLL" /FD /c
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib
/nologo /subsystem:windows /debug /machine:I386 /pdbtype:sept
# ADD LINK32 kernel32.lib rpcndr.lib rpcns4.lib rpcrt4.lib oleaut32.lib uuid.lib
/nologo /entry:"DllMain" /dll /debug /machine:IX86 /def:".src\tpcc_com_ps.def"
/pdbtype:sept
# SUBTRACT LINK32 /pdb:none
# Begin Custom Build - Copying tpcc_com_ps.h
InputPath=.bin\tpcc_com_ps.dll
SOURCE=$(InputPath)

"..\tpcc_com_all\src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
    copy .src\tpcc_com_ps.h ..\tpcc_com_all\src\

# End Custom Build

!ENDIF

# Begin Target

# Name "tpcc_com_ps - Win32 Release"
# Name "tpcc_com_ps - Win32 Debug"
# Begin Group "Source"

# PROP Default_Filter ""
# Begin Source File

```

```

SOURCE=.src\dlldata.c
# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps.def
# PROP Exclude_From_Build 1
# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps.idl

!IF "$(CFG)" == "tpcc_com_ps - Win32 Release"

# PROP Ignore_Default_Tool 1
# Begin Custom Build
InputPath=.src\tpcc_com_ps.idl

BuildCmds=
    midl /Oicf /h "tpcc_com_ps.h" /iid "tpcc_com_ps_i.c"
".src\tpcc_com_ps.idl" /out ".src"

".src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

".src\tpcc_com_ps_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

".src\dlldata.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

".src\tpcc_com_ps_p.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_ps - Win32 Debug"

# PROP Ignore_Default_Tool 1
# Begin Custom Build
InputPath=.src\tpcc_com_ps.idl

BuildCmds=
    midl /Oicf /h "tpcc_com_ps.h" /iid "tpcc_com_ps_i.c"
".src\tpcc_com_ps.idl" /out ".src"

".src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

".src\tpcc_com_ps_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

".src\dlldata.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

".src\tpcc_com_ps_p.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
# End Custom Build

!ENDIF

# End Source File
# Begin Source File

```

```
SOURCE=.\\src\\tpcc_com_ps_i.c
# End Source File
# Begin Source File

SOURCE=.\\src\\tpcc_com_ps_p.c
# End Source File
# End Group
# End Target
# End Project
```

tpcc_com_ps.h

```
#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001
*/
/* Compiler settings for .\\src\\tpcc_com_ps.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany), __declspec(novtable)
   DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

/* verify that the <rpcnldr.h> version is high enough to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcnldr.h"

#ifndef __RPCNDR_H_VERSION__
error this stub requires an updated version of <rpcnldr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
```

```
#ifdef __cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__
/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

MIDL_INTERFACE("FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT __stdcall NewOrder(
        /* [in] */ VARIANT txin,
        /* [out] */ __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall Payment(
        /* [in] */ VARIANT txin,
        /* [out] */ __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall Delivery(
        /* [in] */ VARIANT txin,
        /* [out] */ __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall StockLevel(
        /* [in] */ VARIANT txin,
        /* [out] */ __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall OrderStatus(
        /* [in] */ VARIANT txin,
        /* [out] */ __RPC_FAR *txn_out) = 0;

    virtual HRESULT __stdcall CallSetComplete( void ) = 0;
};

#else /* C style interface */

typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE QueryInterface )(
```

```

ITPCC __RPC_FAR * This,
/* [in] */ REFIID riid,
/* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject);

ULONG ( STDMETHODCALLTYPE __RPC_FAR *AddRef )((
    ITPCC __RPC_FAR * This);

ULONG ( STDMETHODCALLTYPE __RPC_FAR *Release )((
    ITPCC __RPC_FAR * This);

HRESULT ( __stdcall __RPC_FAR *NewOrder )((
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

HRESULT ( __stdcall __RPC_FAR *Payment )((
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

HRESULT ( __stdcall __RPC_FAR *Delivery )((
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

HRESULT ( __stdcall __RPC_FAR *StockLevel )((
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

HRESULT ( __stdcall __RPC_FAR *OrderStatus )((
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

HRESULT ( __stdcall __RPC_FAR *CallSetComplete )((
    ITPCC __RPC_FAR * This);

    END_INTERFACE
) ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
};

#endif // COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl -> QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lpVtbl -> AddRef(This)

#define ITPCC_Release(This) \
    (This)->lpVtbl -> Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lpVtbl -> NewOrder(This,txn_in,txn_out)

```

```

#define ITPCC_Payment(This,txn_in,txn_out) \
    (This)->lpVtbl -> Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lpVtbl -> Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lpVtbl -> StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lpVtbl -> OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl -> CallSetComplete(This)

#endif /* COBJMACROS */

/* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txin,
    /* [out] */ VARIANT __RPC_FAR * txon);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txin,
    /* [out] */ VARIANT __RPC_FAR * txon);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txin,
    /* [out] */ VARIANT __RPC_FAR * txon);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(

```

```

ITPCC __RPC_FAR * This,
/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
ITPCC __RPC_FAR * This,
/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
ITPCC __RPC_FAR * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long __RPC_USER VARIANT_UserSize( unsigned long __RPC_FAR
*, unsigned long , VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserMarshal( unsigned long __RPC_FAR
*, unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserUnmarshal(unsigned long __RPC_FAR
*, unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
void __RPC_USER VARIANT_UserFree( unsigned long __RPC_FAR
*, VARIANT __RPC_FAR * );

/* end of Additional Prototypes */

#ifndef __cplusplus
}
#endif
#endif

```

tpcc_com_ps.idl

```

/*
* FILE: ITPCC.IDL
* Microsoft TPC-C Kit Ver. 4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
*
* not yet audited
*
* PURPOSE: Defines the interface used by TPCC. This interface can be
* implemented by C++ components.
*
* Change history:
* 4.20.000 - first version
*/
// Forward declare all types defined
interface ITPCC;
import "oaidl.idl";
import "ocidl.idl";

[
object,
oleautomation,
uuid(FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B),
helpstring("TPCC Interface"),
pointer_default(unique)
]
interface ITPCC : IUnknown
{
HRESULT __stdcall NewOrder
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);

HRESULT __stdcall Payment
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);

HRESULT __stdcall Delivery
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);

HRESULT __stdcall StockLevel
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);

HRESULT __stdcall OrderStatus
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);

HRESULT __stdcall CallSetComplete

```

```
    );
}; // interface ITPCC
```

tpcc_com_ps_i.c

```
#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany), __declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AXP64)

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#define _MIDL_USE_GUIDDEF_
#endif

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_
#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;

```

```
        unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}};

#ifndef _MIDL_USE_GUIDDEF_
#define MIDL_DEFINE_GUID(IID, \
    IID_ITPCC,0xPEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#endif // !_MIDL_USE_GUIDDEF_

#ifndef MIDL_DEFINE_GUID
#define MIDL_DEFINE_GUID(IID, \
    IID_ITPCC,0xPEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#endif // MIDL_DEFINE_GUID

#ifndef __cplusplus
#endif // __cplusplus

#endif // !_defined(_M_IA64) && !_defined(_M_AXP64)

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run, appending), ms_ext, c_ext, robust
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany), __declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#define _MIDL_USE_GUIDDEF_
#endif

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif

```

```

#define _UNDEF_INITGUID
#ifndef _INCLUDE_GUIDDEF_H_
#define _INCLUDE_GUIDDEF_H_
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#ifndef _MIDL_USE_GUIDDEF_
#define _MIDL_USE_GUIDDEF_ 0

#ifndef __IID_DEFINED__
#define __IID_DEFINED__ 1

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED 1

typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif // _MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#ifndef MIDL_DEFINE_GUID
#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif // _MIDL_USE_GUIDDEF_

#ifndef MIDL_DEFINE_GUID
#define MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);
#endif // _MIDL_USE_GUIDDEF_

#ifndef MIDL_DEFINE_GUID
#define MIDL_DEFINE_GUID
#endif // _MIDL_DEFINE_GUID

#ifndef __cplusplus
}
#endif // _MIDL_USE_GUIDDEF_

#endif /* defined(_M_IA64) || defined(_M_AXP64) */

```

tpcc_com_ps.p.c

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the proxy stub code */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:

```

```

__declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#ifndef _M_IA64 && !defined(_M_AXP64)
#define USE_STUBLESS_PROXY
#endif

/* verify that the <rpcproxy.h> version is high enough to compile this file*/
#ifndef __REQD_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of <rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 997
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")

```

```

static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *)-1 /* ITPCC::NewOrder */ ,
    (void *)-1 /* ITPCC::Payment */ ,
    (void *)-1 /* ITPCC::Delivery */ ,
    (void *)-1 /* ITPCC::StockLevel */ ,
    (void *)-1 /* ITPCC::OrderStatus */ ,
    (void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

extern const USER_MARSHAL_ROUTINE_QUADRUPLE UserMarshalRoutines[
WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x20000, /* Ndr library version */
    0,
    0x5030118, /* MIDL Version 5.3.280 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* Reserved3 */
    0, /* Reserved4 */
    0 /* Reserved5 */

};

#pragma data_seg(".rdata")

static const USER_MARSHAL_ROUTINE_QUADRUPLE UserMarshalRoutines[
WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        {
            VARIANT_UserSize
            ,VARIANT_UserMarshal
            ,VARIANT_UserUnmarshal
            ,VARIANT_UserFree
        }
    };

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this stub because it uses these
features:
#error -Oif or -Oicf, [wire_marshall] or [user_marshall] attribute.
#error However, your C/C++ compilation flags indicate you intend to run this app on
earlier systems.
#error This app will die there with the RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        0x33,
        0x6c,
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
        #ifndef _ALPHA_
        #ifndef _PPC_
        /* FC_AUTO_HANDLE */
        /* Old Flags: object, Oi2 */

```

```

#if !defined(_MIPS_)
/* 8 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has
return, */
0x3, /* 3 */

/* Parameter txn_in */

/* 16 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef !_MIPS_
/* 18 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 20 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Parameter txn_out */

/* 22 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef !_MIPS_
/* 24 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */
#endif
/* 26 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

/* Return value */

/* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef !_MIPS_
/* 30 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */

```

```

#endif
#else
NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
/* 32 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Payment */

/* 34 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* 0 */
/* 36 */ NdrFcLong( 0x0 ), /* Old Flags: object, Oi2 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef !_MIPS_
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has
return, */
0x3, /* 3 */

/* Parameter txn_in */

/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef !_MIPS_
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 54 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Parameter txn_out */

/* 56 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef !_MIPS_
/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */

```

```

#endif
#else
    NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#else
    NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */
#endif
/* 60 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
    NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#ifndef
#else
    NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#ifndef
#else
    NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
#endif
/* 66 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
    NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#ifndef
#else
    NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
#ifndef
#else
    NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
#endif
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has
return, */
0x3, /* 3 */

/* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
    NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#endif

```

```

#else
    NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#else
    NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 88 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */
/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
    NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#ifndef
#else
    NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#ifndef
#else
    NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */
#endif
#endif
/* 94 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
    NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#ifndef
#else
    NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#ifndef
#else
    NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
#endif
/* 100 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
    NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#ifndef
#else
    NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
#endif

```

```

        NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */

#endif
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has
return, */
          0x3, /* 3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
          NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#else
          NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#endif
          NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */

/* 122 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
          NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#else
          NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#endif
          NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */

/* 128 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
          NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#else
          NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#endif
          NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */

/* 134 */ 0x8,
          /* FC_LONG */
          0x0, /* 0 */

```

```

/* Procedure OrderStatus */

/* 136 */ 0x33, /* FC_AUTO_HANDLE */
          0x6c, /* Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
          NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#ifndef _PPC_
NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
#endif
          NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */

/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has
return, */
          0x3, /* 3 */

/* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
          NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#ifndef _PPC_
NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#endif
          NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */

/* 156 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Parameter txn_out */

/* 158 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
          NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#else
          NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#endif
          NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */

/* 162 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

```

```

/* Return value */

/* 164 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#endif
NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
/* 168 */ 0x8,
/* FC_LONG */
0x0,
/* 0 */

/* Procedure CallSetComplete */

/* 170 */ 0x33,
/* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 172 */ NdrFcLong( 0x0 ), /* 0 */
/* 176 */ NdrFcShort( 0x8 ), /* 8 */
#ifndef _ALPHA_
/* 178 */ NdrFcShort( 0x8 ), /* x86, MIPS, PPC Stack size/offset = 8 */
#else
NdrFcShort( 0x10 ), /* Alpha Stack size/offset = 16 */
#endif
/* 180 */ NdrFcShort( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x8 ), /* 8 */
/* 184 */ 0x4,
/* Oi2 Flags: has return, */
0x1,
/* 1 */

/* Return value */

/* 186 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 188 */ NdrFcShort( 0x4 ), /* x86, MIPS, PPC Stack size/offset = 4 */
#else
NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 190 */ 0x8,
/* FC_LONG */
0x0,
/* 0 */

0x0
};

static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /* 0 */
/* 2 */
        0x12, 0x0, /* FC_UP */
/* 4 */ NdrFcShort( 0x3b0 ), /* Offset= 944 (948) */
/* 6 */
        0x2b, /* FC_NON_ENCAPSULATED_UNION */
        0x9, /* FC ULONG */
/* Corr desc: FC USHORT */
        0x0, /*  */
    }
};

```

```

/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x2 ), /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ), /* 16 */
/* 16 */ NdrFcShort( 0x2b ), /* 43 */
/* 18 */ NdrFcLong( 0x3 ), /* 3 */
/* 22 */ NdrFcShort( 0x808 ), /* Simple arm type: FC_LONG */
/* 24 */ NdrFcLong( 0x11 ), /* 17 */
/* 28 */ NdrFcShort( 0x801 ), /* Simple arm type: FC_BYTE */
/* 30 */ NdrFcLong( 0x2 ), /* 2 */
/* 34 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 36 */ NdrFcLong( 0x4 ), /* 4 */
/* 40 */ NdrFcShort( 0x800a ), /* Simple arm type: FC_FLOAT */
/* 42 */ NdrFcLong( 0x5 ), /* 5 */
/* 46 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */
/* 48 */ NdrFcLong( 0xb ), /* 11 */
/* 52 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 54 */ NdrFcLong( 0xa ), /* 10 */
/* 58 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 60 */ NdrFcLong( 0x6 ), /* 6 */
/* 64 */ NdrFcShort( 0xd6 ), /* Offset= 214 (278) */
/* 66 */ NdrFcLong( 0x7 ), /* 7 */
/* 70 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */
/* 72 */ NdrFcLong( 0x8 ), /* 8 */
/* 76 */ NdrFcShort( 0xd0 ), /* Offset= 208 (284) */
/* 78 */ NdrFcLong( 0xd ), /* 13 */
/* 82 */ NdrFcShort( 0xe2 ), /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0x9 ), /* 9 */
/* 88 */ NdrFcShort( 0xee ), /* Offset= 238 (326) */
/* 90 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 94 */ NdrFcShort( 0xfa ), /* Offset= 250 (344) */
/* 96 */ NdrFcLong( 0x24 ), /* 36 */
/* 100 */ NdrFcShort( 0x308 ), /* Offset= 776 (876) */
/* 102 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 106 */ NdrFcShort( 0x302 ), /* Offset= 770 (876) */
/* 108 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 112 */ NdrFcShort( 0x300 ), /* Offset= 768 (880) */
/* 114 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 118 */ NdrFcShort( 0x2fe ), /* Offset= 766 (884) */
/* 120 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 124 */ NdrFcShort( 0x2fc ), /* Offset= 764 (888) */
/* 126 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 130 */ NdrFcShort( 0x2fa ), /* Offset= 762 (892) */
/* 132 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 136 */ NdrFcShort( 0x2f8 ), /* Offset= 760 (896) */
/* 138 */ NdrFcLong( 0x400b ), /* 16395 */
/* 142 */ NdrFcShort( 0x2e6 ), /* Offset= 742 (884) */
/* 144 */ NdrFcLong( 0x400a ), /* 16394 */
/* 148 */ NdrFcShort( 0x2e4 ), /* Offset= 740 (888) */
/* 150 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 154 */ NdrFcShort( 0x2ea ), /* Offset= 746 (900) */
/* 156 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 160 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (896) */
/* 162 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 166 */ NdrFcShort( 0x2e2 ), /* Offset= 738 (904) */
/* 168 */ NdrFcLong( 0x400d ), /* 16397 */
/* 172 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (908) */
/* 174 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 178 */ NdrFcShort( 0x2de ), /* Offset= 734 (912) */
/* 180 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 184 */ NdrFcShort( 0x2dc ), /* Offset= 732 (916) */
/* 186 */ NdrFcLong( 0x400c ), /* 16396 */
/* 190 */ NdrFcShort( 0x2da ), /* Offset= 730 (920) */
/* 192 */ NdrFcLong( 0x10 ), /* 16 */

```

```

/* 196 */ NdrFcShort( 0x8002 ),           /* Simple arm type: FC_CHAR */
/* 198 */ NdrFcLong( 0x12 ),               /* 18 */
/* 202 */ NdrFcShort( 0x8006 ),           /* Simple arm type: FC_SHORT */
/* 204 */ NdrFcLong( 0x13 ),               /* 19 */
/* 208 */ NdrFcShort( 0x8008 ),           /* Simple arm type: FC_LONG */
/* 210 */ NdrFcLong( 0x16 ),               /* 22 */
/* 214 */ NdrFcShort( 0x8008 ),           /* Simple arm type: FC_LONG */
/* 216 */ NdrFcLong( 0x17 ),               /* 23 */
/* 220 */ NdrFcShort( 0x8008 ),           /* Simple arm type: FC_LONG */
/* 222 */ NdrFcLong( 0xe ),                /* 14 */
/* 226 */ NdrFcShort( 0x2be ),             /* Offset= 702 (928) */
/* 228 */ NdrFcLong( 0x400e ),             /* 16398 */
/* 232 */ NdrFcShort( 0x2c4 ),             /* Offset= 708 (940) */
/* 234 */ NdrFcLong( 0x4010 ),             /* 16400 */
/* 238 */ NdrFcShort( 0x2c2 ),             /* Offset= 706 (944) */
/* 240 */ NdrFcLong( 0x4012 ),             /* 16402 */
/* 244 */ NdrFcShort( 0x280 ),              /* Offset= 640 (884) */
/* 246 */ NdrFcLong( 0x4013 ),             /* 16403 */
/* 250 */ NdrFcShort( 0x27e ),              /* Offset= 638 (888) */
/* 252 */ NdrFcLong( 0x4016 ),             /* 16406 */
/* 256 */ NdrFcShort( 0x278 ),              /* Offset= 632 (888) */
/* 258 */ NdrFcLong( 0x4017 ),              /* 16407 */
/* 262 */ NdrFcShort( 0x272 ),              /* Offset= 626 (888) */
/* 264 */ NdrFcLong( 0x0 ),                /* 0 */
/* 268 */ NdrFcShort( 0x0 ),               /* Offset= 0 (268) */
/* 270 */ NdrFcLong( 0x1 ),                /* 1 */
/* 274 */ NdrFcShort( 0x0 ),               /* Offset= 0 (274) */
/* 276 */ NdrFcShort( 0xffffffff ),         /* Offset= -1 (275) */
/* 278 */
          0x15,                      /* FC_STRUCT */
          0x7,
/* 280 */ NdrFcShort( 0x8 ),               /* 8 */
/* 282 */ 0xb,                         /* FC_HYPER */
          0x5b,                      /* FC_END */
/* 284 */
          0x12, 0x0,                   /* FC_UP */
/* 286 */ NdrFcShort( 0xc ),               /* Offset= 12 (298) */
/* 288 */
          0x1b,                      /* FC_CARRAY */
          0x1,
          0x1,
/* 290 */ NdrFcShort( 0x2 ),               /* 2 */
/* 292 */ 0x9,                          /* Corr desc: FC ULONG */
          0x0,
          0x*,
/* 294 */ NdrFcShort( 0xffff ),             /* -4 */
/* 296 */ 0x6,                          /* FC_SHORT */
          0x5b,                      /* FC_END */
/* 298 */
          0x17,                      /* FC_CSTRUCT */
          0x3,
          0x3,
/* 300 */ NdrFcShort( 0x8 ),               /* 8 */
/* 302 */ NdrFcShort( 0xffffffff2 ),        /* Offset= -14 (288) */
/* 304 */ 0x8,                          /* FC_LONG */
          0x8,
          0x*,
/* 306 */ 0x5c,                          /* FC_PAD */
          0x5b,                      /* FC_END */
/* 308 */
          0x2f,                      /* FC_IP */
          0x5a,                      /* FC_CONSTANT_IID */
/* 310 */ NdrFcLong( 0x0 ),                /* 0 */
/* 314 */ NdrFcShort( 0x0 ),               /* 0 */
/* 316 */ NdrFcShort( 0x0 ),               /* 0 */
/* 318 */ 0xc0,                          /* 192 */
          0x0,                      /* 0 */

```

```

/* 320 */ 0x0,                      /* 0 */
          0x0,                      /* 0 */
          0x0,                      /* 0 */
          0x46,                      /* 70 */
/* 326 */
          0x2f,                      /* FC_IP */
          0x5a,                      /* FC_CONSTANT_IID */
/* 328 */ NdrFcLong( 0x20400 ),            /* 132096 */
/* 332 */ NdrFcShort( 0x0 ),               /* 0 */
/* 334 */ NdrFcShort( 0x0 ),               /* 0 */
/* 336 */ 0xc0,                          /* 192 */
          0x0,                      /* 0 */
/* 338 */ 0x0,                      /* 0 */
          0x0,                      /* 0 */
/* 340 */ 0x0,                      /* 0 */
          0x46,                      /* 70 */
/* 342 */ 0x0,                      /* 0 */
          0x46,                      /* 70 */
/* 344 */
          0x12, 0x10,                 /* FC_UP [pointer_deref] */
/* 346 */ NdrFcShort( 0x2 ),               /* Offset= 2 (348) */
/* 348 */
          0x2a,                      /* FC_ENCAPSULATED_UNION */
          0x49,
          0x73,
/* 354 */ NdrFcShort( 0x18 ),             /* 24 */
/* 356 */ NdrFcShort( 0xa ),               /* 10 */
/* 358 */ NdrFcLong( 0x8 ),                /* 8 */
/* 362 */ NdrFcShort( 0x58 ),               /* Offset= 88 (450) */
/* 364 */ NdrFcLong( 0xd ),                /* 13 */
/* 368 */ NdrFcShort( 0x78 ),               /* Offset= 120 (488) */
/* 370 */ NdrFcLong( 0x9 ),                /* 9 */
/* 374 */ NdrFcShort( 0x94 ),               /* Offset= 148 (522) */
/* 376 */ NdrFcLong( 0xc ),                /* 12 */
/* 380 */ NdrFcShort( 0xbc ),               /* Offset= 188 (568) */
/* 382 */ NdrFcLong( 0x24 ),               /* 36 */
/* 386 */ NdrFcShort( 0x114 ),              /* Offset= 276 (662) */
/* 388 */ NdrFcLong( 0x800d ),              /* 32781 */
/* 392 */ NdrFcShort( 0x130 ),              /* Offset= 304 (696) */
/* 394 */ NdrFcLong( 0x10 ),                /* 16 */
/* 398 */ NdrFcShort( 0x148 ),              /* Offset= 328 (726) */
/* 400 */ NdrFcLong( 0x2 ),                /* 2 */
/* 404 */ NdrFcShort( 0x160 ),              /* Offset= 352 (756) */
/* 406 */ NdrFcLong( 0x3 ),                /* 3 */
/* 410 */ NdrFcShort( 0x178 ),              /* Offset= 376 (786) */
/* 412 */ NdrFcLong( 0x14 ),                /* 20 */
/* 416 */ NdrFcShort( 0x190 ),              /* Offset= 400 (816) */
/* 418 */ NdrFcShort( 0xffffffff ),         /* Offset= -1 (417) */
/* 420 */
          0x1b,                      /* FC_CARRAY */
          0x3,
          0x3,
/* 422 */ NdrFcShort( 0x4 ),               /* 4 */
/* 424 */ 0x19,                          /* Corr desc: field pointer, FC ULONG */
          0x0,
          0x*,
/* 426 */ NdrFcShort( 0x0 ),               /* 0 */
/* 428 */
          0x4b,                      /* FC_PP */
          0x5c,                      /* FC_PAD */
/* 430 */

```

```

0x48,          /* FC_VARIABLE_REPEAT */
0x49,          /* FC_FIXED_OFFSET */

/* 432 */ NdrFcShort( 0x4 ), /* 4 */
/* 434 */ NdrFcShort( 0x0 ), /* 0 */
/* 436 */ NdrFcShort( 0x1 ), /* 1 */
/* 438 */ NdrFcShort( 0x0 ), /* 0 */
/* 440 */ NdrFcShort( 0x0 ), /* 0 */
/* 442 */ 0x12, 0x0,        /* FC_UP */
/* 444 */ NdrFcShort( 0xfffffff6e ), /* Offset= -146 (298) */
/* 446 */

0x5b,          /* FC_END */

0x8,           /* FC_LONG */
/* 448 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */

/* 450 */
0x16,          /* FC_PSTRUCT */
0x3,           /* 3 */

/* 452 */ NdrFcShort( 0x8 ), /* 8 */
/* 454 */
0x4b,          /* FC_PP */
0x5c,          /* FC_PAD */

/* 456 */
0x46,          /* FC_NO_REPEAT */
0x5c,          /* FC_PAD */

/* 458 */ NdrFcShort( 0x4 ), /* 4 */
/* 460 */ NdrFcShort( 0x4 ), /* 4 */
/* 462 */ 0x11, 0x0,        /* FC_RP */
/* 464 */ NdrFcShort( 0xfffffff4 ), /* Offset= -44 (420) */
/* 466 */

0x5b,          /* FC_END */

0x8,           /* FC_LONG */
/* 468 */ 0x8,           /* FC_LONG */
0x5b,          /* FC_END */

/* 470 */
0x21,          /* FC_BOGUS_ARRAY */
0x3,           /* 3 */

/* 472 */ NdrFcShort( 0x0 ), /* 0 */
/* 474 */ 0x19,          /* Corr desc: field pointer, FC ULONG */
0x0,           /* */
/* 476 */ NdrFcShort( 0x0 ), /* 0 */
/* 478 */ NdrFcLong( 0xfffffff ), /* -1 */
/* 482 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */
0x0,           /* 0 */
/* 484 */ NdrFcShort( 0xfffffff50 ), /* Offset= -176 (308) */
/* 486 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */

/* 488 */
0x1a,          /* FC_BOGUS_STRUCT */
0x3,           /* 3 */

/* 490 */ NdrFcShort( 0x8 ), /* 8 */
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x6 ), /* Offset= 6 (500) */
/* 496 */ 0x8,           /* FC_LONG */
0x36,          /* FC_POINTER */
/* 498 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */

/* 500 */
0x11, 0x0,      /* FC_RP */
/* 502 */ NdrFcShort( 0xfffffff0 ), /* Offset= -32 (470) */
/* 504 */

0x21,          /* FC_BOGUS_ARRAY */

0x3,           /* 3 */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ 0x19,          /* Corr desc: field pointer, FC ULONG */
0x0,           /* */
/* 510 */ NdrFcShort( 0x0 ), /* 0 */
/* 512 */ NdrFcLong( 0xfffffff ), /* -1 */
/* 516 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */
0x0,           /* 0 */
/* 518 */ NdrFcShort( 0xfffffff40 ), /* Offset= -192 (326) */
/* 520 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */

/* 522 */
0x1a,          /* FC_BOGUS_STRUCT */
0x3,           /* 3 */

/* 524 */ NdrFcShort( 0x8 ), /* 8 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8,           /* FC_LONG */
0x36,          /* FC_POINTER */
/* 532 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */

/* 534 */
0x11, 0x0,      /* FC_RP */
/* 536 */ NdrFcShort( 0xfffffff0 ), /* Offset= -32 (504) */
/* 538 */

0x1b,          /* FC_CARRAY */
0x3,           /* 3 */

/* 540 */ NdrFcShort( 0x4 ), /* 4 */
/* 542 */ 0x19,          /* Corr desc: field pointer, FC ULONG */
0x0,           /* */
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */

0x4b,          /* FC_PP */
0x5c,          /* FC_PAD */

/* 548 */
0x48,          /* FC_VARIABLE_REPEAT */
0x49,          /* FC_FIXED_OFFSET */

/* 550 */ NdrFcShort( 0x4 ), /* 4 */
/* 552 */ NdrFcShort( 0x0 ), /* 0 */
/* 554 */ NdrFcShort( 0x1 ), /* 1 */
/* 556 */ NdrFcShort( 0x0 ), /* 0 */
/* 558 */ NdrFcShort( 0x0 ), /* 0 */
/* 560 */ 0x12, 0x0,        /* FC_UP */
/* 562 */ NdrFcShort( 0x182 ), /* Offset= 386 (948) */
/* 564 */

0x5b,          /* FC_END */

0x8,           /* FC_LONG */
/* 566 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */

/* 568 */
0x1a,          /* FC_BOGUS_STRUCT */
0x3,           /* 3 */

/* 570 */ NdrFcShort( 0x8 ), /* 8 */
/* 572 */ NdrFcShort( 0x0 ), /* 0 */
/* 574 */ NdrFcShort( 0x6 ), /* Offset= 6 (580) */
/* 576 */ 0x8,           /* FC_LONG */
0x36,          /* FC_POINTER */
/* 578 */ 0x5c,          /* FC_PAD */
0x5b,          /* FC_END */

/* 580 */
0x11, 0x0,      /* FC_RP */
/* 582 */ NdrFcShort( 0xfffffff4 ), /* Offset= -44 (538) */

```

```

/* 584 */
    0x2f,           /* FC_IP */
    0x5a,           /* FC_CONSTANT_IID */
/* 586 */ NdrFcLong( 0x2f ), /* 47 */
/* 590 */ NdrFcShort( 0x0 ), /* 0 */
/* 592 */ NdrFcShort( 0x0 ), /* 0 */
/* 594 */ 0xc0,
    0x0,           /* 0 */
/* 596 */ 0x0,
    0x0,           /* 0 */
/* 598 */ 0x0,
    0x0,           /* 0 */
/* 600 */ 0x0,
    0x46,          /* 70 */
/* 602 */
    0x1b,          /* FC_CARRAY */
    0x0,           /* 0 */
/* 604 */ NdrFcShort( 0x1 ), /* 1 */
/* 606 */ 0x19,
    /* Corr desc: field pointer, FC ULONG */
    0x0,           /* * */
/* 608 */ NdrFcShort( 0x4 ), /* 4 */
/* 610 */ 0x1,
    /* FC_BYTE */
    0x5b,          /* FC_END */
/* 612 */
    0x1a,          /* FC_BOGUS_STRUCT */
    0x3,           /* 3 */
/* 614 */ NdrFcShort( 0x10 ), /* 16 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ NdrFcShort( 0xa ), /* Offset= 10 (628) */
/* 620 */ 0x8,
    /* FC_LONG */
    0x8,           /* FC_LONG */
/* 622 */ 0x4c,
    /* FC_EMBEDDED_COMPLEX */
    0x0,           /* 0 */
/* 624 */ NdrFcShort( 0xffffffd8 ), /* Offset= -40 (584) */
/* 626 */ 0x36,
    /* FC_POINTER */
    0x5b,          /* FC_END */
/* 628 */
    0x12, 0x0,     /* FC_UP */
/* 630 */ NdrFcShort( 0xffffffe4 ), /* Offset= -28 (602) */
/* 632 */
    0x1b,          /* FC_CARRAY */
    0x3,           /* 3 */
/* 634 */ NdrFcShort( 0x4 ), /* 4 */
/* 636 */ 0x19,
    /* Corr desc: field pointer, FC ULONG */
    0x0,           /* * */
/* 638 */ NdrFcShort( 0x0 ), /* 0 */
/* 640 */
    0x4b,          /* FC_PP */
    0x5c,          /* FC_PAD */
/* 642 */
    0x48,          /* FC_VARIABLE_REPEAT */
    0x49,          /* FC_FIXED_OFFSET */
/* 644 */ NdrFcShort( 0x4 ), /* 4 */
/* 646 */ NdrFcShort( 0x0 ), /* 0 */
/* 648 */ NdrFcShort( 0x1 ), /* 1 */
/* 650 */ NdrFcShort( 0x0 ), /* 0 */
/* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 654 */ 0x12, 0x0, /* FC_UP */
/* 656 */ NdrFcShort( 0xffffffd4 ), /* Offset= -44 (612) */
/* 658 */
    0x5b,          /* FC_END */
    0x8,           /* FC_LONG */

```

```

/* 660 */ 0x5c,           /* FC_PAD */
    0x5b,           /* FC_END */
/* 662 */
    0x1a,           /* FC_BOGUS_STRUCT */
    0x3,            /* 3 */
/* 664 */ NdrFcShort( 0x8 ), /* 8 */
/* 666 */ NdrFcShort( 0x0 ), /* 0 */
/* 668 */ NdrFcShort( 0x6 ), /* Offset= 6 (674) */
/* 670 */ 0x8,
    0x36,           /* FC_LONG */
/* 672 */ 0x5c,           /* FC_PAD */
    0x5b,           /* FC_END */
/* 674 */
    0x11, 0x0,     /* FC_RP */
/* 676 */ NdrFcShort( 0xfffffff4 ), /* Offset= -44 (632) */
/* 678 */
    0x1d,           /* FC_SMFARRAY */
    0x0,            /* 0 */
/* 680 */ NdrFcShort( 0x8 ), /* 8 */
/* 682 */ 0x1,
    /* FC_BYT */
    0x5b,          /* FC_END */
/* 684 */
    0x15,           /* FC_STRUCT */
    0x3,            /* 3 */
/* 686 */ NdrFcShort( 0x10 ), /* 16 */
/* 688 */ 0x8,
    0x6,            /* FC_LONG */
/* 690 */ 0x6,
    0x4c,           /* FC_SHORT */
/* 692 */ 0x0,
    NdrFcShort( 0xfffffff1 ), /* Offset= -15 (678) */
    0x5b,          /* FC_END */
/* 696 */
    0x1a,           /* FC_BOGUS_STRUCT */
    0x3,            /* 3 */
/* 698 */ NdrFcShort( 0x18 ), /* 24 */
/* 700 */ NdrFcShort( 0x0 ), /* 0 */
/* 702 */ NdrFcShort( 0xa ), /* Offset= 10 (712) */
/* 704 */ 0x8,
    0x36,           /* FC_POINTER */
/* 706 */ 0x4c,
    /* FC_EMBEDDED_COMPLEX */
    0x0,            /* 0 */
/* 708 */ NdrFcShort( 0xffffffe8 ), /* Offset= -24 (684) */
/* 710 */ 0x5c,
    /* FC_PAD */
    0x5b,          /* FC_END */
/* 712 */
    0x11, 0x0,     /* FC_RP */
/* 714 */ NdrFcShort( 0xfffffff0c ), /* Offset= -244 (470) */
/* 716 */
    0x1b,           /* FC_CARRAY */
    0x0,            /* 0 */
/* 718 */ NdrFcShort( 0x1 ), /* 1 */
/* 720 */ 0x19,
    /* Corr desc: field pointer, FC ULONG */
    0x0,           /* * */
/* 722 */ NdrFcShort( 0x0 ), /* 0 */
/* 724 */ 0x1,
    /* FC_BYT */
    0x5b,          /* FC_END */
/* 726 */
    0x16,           /* FC_PSTRUCT */
    0x3,            /* 3 */
/* 728 */ NdrFcShort( 0x8 ), /* 8 */
/* 730 */
    0x4b,           /* FC_PP */

```

```

/* 732 */           0x5c,          /* FC_PAD */
/* 734 */           0x46,          /* FC_NO_REPEAT */
/* 736 */           0x5c,          /* FC_PAD */
/* 738 */           0x12, 0x0,    /* FC_UP */
/* 740 */           0xffffffe8, /* Offset= -24 (716) */
/* 742 */           0x5b,          /* FC_END */
/* 744 */           0x8,           /* FC_LONG */
/* 746 */           0x5b,          /* FC_END */
/* 748 */           0x1b,          /* FC_CARRAY */
/* 750 */           0x1,           /* 1 */
/* 752 */           0x2,           /* 2 */
/* 754 */           0x0,           /* 0 */
/* 756 */           0x5b,          /* FC_END */
/* 758 */           0x16,          /* FC_PSTRUCT */
/* 760 */           0x3,           /* 3 */
/* 762 */           0x4b,          /* FC_PP */
/* 764 */           0x5c,          /* FC_PAD */
/* 766 */           0x46,          /* FC_NO_REPEAT */
/* 768 */           0x5c,          /* FC_PAD */
/* 770 */           0x12, 0x0,    /* FC_UP */
/* 772 */           0x5b,          /* FC_END */
/* 774 */           0x8,           /* FC_LONG */
/* 776 */           0x5b,          /* FC_END */
/* 778 */           0x1b,          /* FC_CARRAY */
/* 780 */           0x3,           /* 3 */
/* 782 */           0x4,           /* 4 */
/* 784 */           0x0,           /* 0 */
/* 786 */           0x5b,          /* FC_END */
/* 788 */           0x16,          /* FC_PSTRUCT */
/* 790 */           0x3,           /* 3 */
/* 792 */           0x4b,          /* FC_PP */
/* 794 */           0x5c,          /* FC_PAD */
/* 796 */           0x4,           /* 4 */
/* 798 */           0x12, 0x0,    /* FC_UP */
/* 800 */           0xffffffe8, /* Offset= -24 (776) */
/* 802 */           0x5b,          /* FC_END */
/* 804 */           0x8,           /* FC_LONG */
/* 806 */           0x5b,          /* FC_END */
/* 808 */           0x1b,          /* FC_CARRAY */
/* 810 */           0x7,           /* 7 */
/* 812 */           0x8,           /* 8 */
/* 814 */           0xb,           /* FC_HYPER */
/* 816 */           0x16,          /* FC_PSTRUCT */
/* 818 */           0x3,           /* 3 */
/* 820 */           0x4b,          /* FC_PP */
/* 822 */           0x5c,          /* FC_PAD */
/* 824 */           0x46,          /* FC_NO_REPEAT */
/* 826 */           0x5c,          /* FC_PAD */
/* 828 */           0x12, 0x0,    /* FC_UP */
/* 830 */           0xffffffe8, /* Offset= -24 (806) */
/* 832 */           0x5b,          /* FC_END */
/* 834 */           0x8,           /* FC_LONG */
/* 836 */           0x5b,          /* FC_END */
/* 838 */           0x15,          /* FC_STRUCT */
/* 840 */           0x3,           /* 3 */
/* 842 */           0x5c,          /* FC_PAD */
/* 844 */           0x1b,          /* FC_CARRAY */
/* 846 */           0x3,           /* 3 */
/* 848 */           0x7,           /* Corr desc: FC USHORT */
/* 850 */           0x0,           /* 0 */
/* 852 */           0x4c,          /* FC_EMBEDDED_COMPLEX */
/* 854 */           0x0,           /* 0 */
/* 856 */           0x5c,          /* FC_PAD */
/* 858 */           0x1a,          /* FC_BOGUS_STRUCT */
/* 860 */           0x3,           /* 3 */
/* 862 */           0x28,          /* 40 */
/* 864 */           0xfee,          /* Offset= -18 (844) */

```

```

/* 864 */ NdrFcShort( 0x0 ), /* Offset= 0 (864) */
/* 866 */ 0x6, /* FC_SHORT */
0x6, /* FC_ALIGNM4 */
/* 868 */ 0x38, /* FC_SHORT */
0x8, /* FC_LONG */
/* 870 */ 0x8, /* FC_LONG */
0x4c, /* FC_EMBEDDED_COMPLEX */
/* 872 */ 0x0, /* FC_LONG */
NdrFcShort( 0xfffffd7 ), /* Offset= -521 (352) */
0x5b, /* FC_END */
/* 876 */
0x12, 0x0, /* FC_UP */
/* 878 */ NdrFcShort( 0xfffffe6 ), /* Offset= -266 (612) */
/* 880 */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* 882 */ 0x1, /* FC_BYTE */
0x5c, /* FC_PAD */
/* 884 */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* 886 */ 0x6, /* FC_SHORT */
0x5c, /* FC_PAD */
/* 888 */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* 890 */ 0x8, /* FC_LONG */
0x5c, /* FC_PAD */
/* 892 */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* 894 */ 0xa, /* FC_FLOAT */
0x5c, /* FC_PAD */
/* 896 */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* 898 */ 0xc, /* FC_DOUBLE */
0x5c, /* FC_PAD */
/* 900 */
0x12, 0x0, /* FC_UP */
/* 902 */ NdrFcShort( 0xfffffd90 ), /* Offset= -624 (278) */
/* 904 */
0x12, 0x10, /* FC_UP [pointer_deref] */
/* 906 */ NdrFcShort( 0xfffffd92 ), /* Offset= -622 (284) */
/* 908 */
0x12, 0x10, /* FC_UP [pointer_deref] */
/* 910 */ NdrFcShort( 0xfffffd4 ), /* Offset= -602 (308) */
/* 912 */
0x12, 0x10, /* FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfffffdb4 ), /* Offset= -588 (326) */
/* 916 */
0x12, 0x10, /* FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xfffffdc2 ), /* Offset= -574 (344) */
/* 920 */
0x12, 0x10, /* FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0x2 ), /* Offset= 2 (924) */
/* 924 */
0x12, 0x0, /* FC_UP */
/* 926 */ NdrFcShort( 0x16 ), /* Offset= 22 (948) */
/* 928 */
0x15, /* FC_STRUCT */
0x7, /* 7 */
/* 930 */ NdrFcShort( 0x10 ), /* 16 */
/* 932 */ 0x6, /* FC_SHORT */
0x1, /* FC_BYTE */
/* 934 */ 0x1, /* FC_BYTE */
0x38, /* FC_ALIGNM4 */
/* 936 */ 0x8, /* FC_LONG */

```

```

/* 938 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 940 */
0x12, 0x0, /* FC_UP */
/* 942 */ NdrFcShort( 0xfffffffff2 ), /* Offset= -14 (928) */
/* 944 */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* 946 */ 0x2, /* FC_CHAR */
0x5c, /* FC_PAD */
/* 948 */
0x1a, /* FC_BOGUS_STRUCT */
0x7, /* 7 */
/* 950 */ NdrFcShort( 0x20 ), /* 32 */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x0 ), /* Offset= 0 (954) */
/* 956 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 958 */ 0x6, /* FC_SHORT */
0x6, /* FC_SHORT */
/* 960 */ 0x6, /* FC_SHORT */
0x6, /* FC_SHORT */
/* 962 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 964 */ NdrFcShort( 0xfffffc42 ), /* Offset= -958 (6) */
/* 966 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 968 */ 0xb4, /* FC_USER_MARSHAL */
0x83, /* 131 */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x10 ), /* 16 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffffc32 ), /* Offset= -974 (2) */
/* 978 */
0x11, 0x4, /* FC_RP [alloced_on_stack] */
/* 980 */ NdrFcShort( 0x6 ), /* Offset= 6 (986) */
/* 982 */
0x13, 0x0, /* FC_OP */
/* 984 */ NdrFcShort( 0xfffffffcd ), /* Offset= -36 (948) */
/* 986 */ 0xb4, /* FC_USER_MARSHAL */
0x83, /* 131 */
/* 988 */ NdrFcShort( 0x0 ), /* 0 */
/* 990 */ NdrFcShort( 0x10 ), /* 16 */
/* 992 */ NdrFcShort( 0x0 ), /* 0 */
/* 994 */ NdrFcShort( 0xfffffff4 ), /* Offset= -12 (982) */
0x0
}
};

const CIInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
    ( CIInterfaceProxyVtbl * ) &_ITPCCProxyVtbl,
    0
};

const CIInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
    ( CIInterfaceStubVtbl * ) &_ITPCCStubVtbl,
    0
};

PCIInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =

```

```

{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)           IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) & _tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) & _tpcc_com_ps_StubVtblList,
    (const PCInterfaceName *) & _tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* !defined(_M_IA64) && !defined(_M_AXP64) */

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the proxy stub code */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oifc (OptLev-i2), W1, Zp8, env=Win64 (32b run, appending), ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__

```

```

#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of <rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE    979
#define PROC_FORMAT_STRING_SIZE   253
#define TRANSMIT_AS_TABLE_SIZE    0
#define WIRE_MARSHAL_TABLE_SIZE   1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short      Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short      Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    44,
    88,
    132,
    176,
    220
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =

```

```

{
    &Object_StubDesc,
    0,
    _MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    _MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *)-1 /* ITPCC::NewOrder */ ,
    (void *)-1 /* ITPCC::Payment */ ,
    (void *)-1 /* ITPCC::Delivery */ ,
    (void *)-1 /* ITPCC::StockLevel */ ,
    (void *)-1 /* ITPCC::OrderStatus */ ,
    (void *)-1 /* ITPCC::CallSetComplete */ ,
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

extern const USER_MARSHAL_ROUTINE_QUADRUPLE UserMarshalRoutines
WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    _MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x50002, /* Ndr library version */
    0,
    0x5030118, /* MIDL Version 5.3.280 */
};

```

```

0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* Reserved3 */
0, /* Reserved4 */
0 /* Reserved5 */
};

#pragma data_seg(".rdata")

static const USER_MARSHAL_ROUTINE_QUADRUPLE UserMarshalRoutines[
WIRE_MARSHAL_TABLE_SIZE ] =
{
{
    VARIANT_UserSize
    ,VARIANT_UserMarshal
    ,VARIANT_UserUnmarshal
    ,VARIANT_UserFree
}
};

#endif !defined(__RPC_WIN64__)
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */

        0x33,                               /* FC_AUTO_HANDLE */
        0x6c,                               /* Old Flags: object, Oi2 */
/* 2 */ NdrFcLong( 0x0 ), /* 0 */
/* 6 */ NdrFcShort( 0x3 ), /* 3 */
#ifndef _ALPHA_
/* 8 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x47,                      /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
                                         0x3,                         /* 3 */
/* 16 */ 0xa,                        /* 10 */
                                         0x7,                         /* Ext Flags: new corr desc, clt
corr check, srv corr check, */
/* 18 */ NdrFcShort( 0x20 ), /* 32 */
/* 20 */ NdrFcShort( 0x20 ), /* 32 */
/* 22 */ NdrFcShort( 0x0 ), /* 0 */
/* 24 */ NdrFcShort( 0x0 ), /* 0 */
                                         /* Parameter txn_in */

/* 26 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 28 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */

```

```

#else
    NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 30 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 32 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=24 */
#ifndef _ALPHA_
/* 34 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
    NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 36 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 40 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
    NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 42 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Payment */

/* 44 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
#ifndef _ALPHA_
/* 52 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
    NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
0x3, /* 3 */
/* 60 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt
corr check, srv corr check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 70 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 72 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
    NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 74 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

```

```

/* 76 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=24 */
#ifndef _ALPHA_
/* 78 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
    NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 80 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 84 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
    NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 86 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Delivery */

/* 88 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef _ALPHA_
/* 96 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
    NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
0x3, /* 3 */
/* 104 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt
corr check, srv corr check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 116 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
    NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 118 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 120 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=24 */
#ifndef _ALPHA_
/* 122 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
    NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif

```

```

/* 124 */ NdrFcShort( 0x3c8 ),           /* Type Offset=968 */
          /* Return value */

/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 128 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 130 */ 0x8,                /* FC_LONG */
0x0,                  /* 0 */

/* Procedure StockLevel */

/* 132 */ 0x33,              /* FC_AUTO_HANDLE */
0x6c,                /* Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef _ALPHA_
/* 140 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47,              /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
0x3,                  /* 3 */
/* 148 */ 0xa,               /* 10 */
0x7,                  /* Ext Flags: new corr desc, clt
corr check, srv corr check, */
/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 160 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 162 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=24 */
#ifndef _ALPHA_
/* 166 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 168 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 172 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
          /* FC_LONG */
0x0,                  /* 0 */

/* Procedure OrderStatus */

/* 176 */ 0x33,              /* FC_AUTO_HANDLE */
0x6c,                /* Old Flags: object, Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
#ifndef _ALPHA_
/* 184 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47,              /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
0x3,                  /* 3 */
/* 192 */ 0xa,               /* 10 */
0x7,                  /* Ext Flags: new corr desc, clt
corr check, srv corr check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
/* 204 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 206 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out, simple
ref, srv alloc size=24 */
#ifndef _ALPHA_
/* 210 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 212 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
/* 216 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
          /* FC_LONG */
0x0,                  /* 0 */

/* Procedure CallSetComplete */

```

```

/* 220 */ 0x33,           /* FC_AUTO_HANDLE */
          0x6c,           /* Old Flags: object, Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ /* NdrFcShort( 0x10 ), /* ia64, axp64 Stack size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ /* 0x44,           /* Oi2 Flags: has return, has ext, */
          0x1,            /* 1 */
/* 236 */ /* 0xa,             /* 10 */
          0x1,            /* Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

/* * Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
/* 248 */ NdrFcShort( 0x8 ),  /* ia64, axp64 Stack size/offset = 8 */
/* 250 */ /* 0x8,             /* FC_LONG */
          0x0,            /* 0 */

          0x0
};

static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
    0,
    {

        NdrFcShort( 0x0 ), /* 0 */

/* 2 */           0x12, 0x0,           /* FC_UP */
/* 4 */   NdrFcShort( 0x39e ), /* Offset= 926 (930) */
/* 6 */           0x2b,           /* FC_NON_ENCAPSULATED_UNION */
          0x9,            /* FC ULONG */
/* 8 */   0x7,             /* Corr desc: FC USHORT */
          0x0,            /* */

/* 10 */  NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */  NdrFcShort( 0x1 ), /* Corr flags: early */
/* 14 */  NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */  NdrFcShort( 0x10 ), /* 16 */
/* 18 */  NdrFcShort( 0x2b ), /* 43 */
/* 20 */  NdrFcLong( 0x3 ), /* 3 */
/* 24 */  NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 26 */  NdrFcLong( 0x11 ), /* 17 */
/* 30 */  NdrFcShort( 0x8001 ), /* Simple arm type: FC_BYTE */
/* 32 */  NdrFcLong( 0x2 ), /* 2 */
/* 36 */  NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 38 */  NdrFcLong( 0x4 ), /* 4 */
/* 42 */  NdrFcShort( 0x800a ), /* Simple arm type: FC_FLOAT */
/* 44 */  NdrFcLong( 0x5 ), /* 5 */
/* 48 */  NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */
/* 50 */  NdrFcLong( 0xb ), /* 11 */
/* 54 */  NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 56 */  NdrFcLong( 0xa ), /* 10 */
/* 60 */  NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 62 */  NdrFcLong( 0x6 ), /* 6 */
/* 66 */  NdrFcShort( 0xd6 ), /* Offset= 214 (280) */
/* 68 */  NdrFcLong( 0x7 ), /* 7 */

```

```

/* 72 */  NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */
/* 74 */  NdrFcLong( 0x8 ), /* 8 */
/* 78 */  NdrFcShort( 0xd0 ), /* Offset= 208 (286) */
/* 80 */  NdrFcLong( 0xd ), /* 13 */
/* 84 */  NdrFcShort( 0xe4 ), /* Offset= 228 (312) */
/* 86 */  NdrFcLong( 0x9 ), /* 9 */
/* 90 */  NdrFcShort( 0xf0 ), /* Offset= 240 (330) */
/* 92 */  NdrFcLong( 0x2000 ), /* 8192 */
/* 96 */  NdrFcShort( 0xfc ), /* Offset= 252 (348) */
/* 98 */  NdrFcLong( 0x24 ), /* 36 */
/* 102 */ NdrFcShort( 0x2f4 ), /* Offset= 756 (858) */
/* 104 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 108 */ NdrFcShort( 0x2ee ), /* Offset= 750 (858) */
/* 110 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 114 */ NdrFcShort( 0x2ec ), /* Offset= 748 (862) */
/* 116 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 120 */ NdrFcShort( 0x2ea ), /* Offset= 746 (866) */
/* 122 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 126 */ NdrFcShort( 0x2e8 ), /* Offset= 744 (870) */
/* 128 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 132 */ NdrFcShort( 0x2e6 ), /* Offset= 742 (874) */
/* 134 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 138 */ NdrFcShort( 0x2e4 ), /* Offset= 740 (878) */
/* 140 */ NdrFcLong( 0x400b ), /* 16395 */
/* 144 */ NdrFcShort( 0x2d2 ), /* Offset= 722 (866) */
/* 146 */ NdrFcLong( 0x400a ), /* 16394 */
/* 150 */ NdrFcShort( 0x2d0 ), /* Offset= 720 (870) */
/* 152 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 156 */ NdrFcShort( 0x2d6 ), /* Offset= 726 (882) */
/* 158 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 162 */ NdrFcShort( 0x2cc ), /* Offset= 716 (878) */
/* 164 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 168 */ NdrFcShort( 0x2ce ), /* Offset= 718 (886) */
/* 170 */ NdrFcLong( 0x400d ), /* 16397 */
/* 174 */ NdrFcShort( 0x2cc ), /* Offset= 716 (890) */
/* 176 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 180 */ NdrFcShort( 0x2ca ), /* Offset= 714 (894) */
/* 182 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 186 */ NdrFcShort( 0x2c8 ), /* Offset= 712 (898) */
/* 188 */ NdrFcLong( 0x400c ), /* 16396 */
/* 192 */ NdrFcShort( 0x2c6 ), /* Offset= 710 (902) */
/* 194 */ NdrFcLong( 0x10 ), /* 16 */
/* 198 */ NdrFcShort( 0x8002 ), /* Simple arm type: FC_CHAR */
/* 200 */ NdrFcLong( 0x12 ), /* 18 */
/* 204 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 206 */ NdrFcLong( 0x13 ), /* 19 */
/* 210 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 212 */ NdrFcLong( 0x16 ), /* 22 */
/* 216 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 218 */ NdrFcLong( 0x17 ), /* 23 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 224 */ NdrFcLong( 0xe ), /* 14 */
/* 228 */ NdrFcShort( 0x2aa ), /* Offset= 682 (910) */
/* 230 */ NdrFcLong( 0x400e ), /* 16398 */
/* 234 */ NdrFcShort( 0x2b0 ), /* Offset= 688 (922) */
/* 236 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 240 */ NdrFcShort( 0x2ae ), /* Offset= 686 (926) */
/* 242 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 246 */ NdrFcShort( 0x26c ), /* Offset= 620 (866) */
/* 248 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 252 */ NdrFcShort( 0x26a ), /* Offset= 618 (870) */
/* 254 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 258 */ NdrFcShort( 0x264 ), /* Offset= 612 (870) */

```

```

/* 260 */ NdrFcLong( 0x4017 ),           /* 16407 */
/* 264 */ NdrFcShort( 0x25e ),           /* Offset= 606 (870) */
/* 266 */ NdrFcLong( 0x0 ),             /* 0 */
/* 270 */ NdrFcShort( 0x0 ),             /* Offset= 0 (270) */
/* 272 */ NdrFcLong( 0x1 ),             /* 1 */
/* 276 */ NdrFcShort( 0x0 ),             /* Offset= 0 (276) */
/* 278 */ NdrFcShort( 0xffffffff ),       /* Offset= -1 (277) */
/* 280 */
          0x15,                      /* FC_STRUCT */
          0x7,                       /* 7 */
/* 282 */ NdrFcShort( 0x8 ),             /* 8 */
/* 284 */ 0xb,                         /* FC_HYPER */
          0x5b,                      /* FC_END */
/* 286 */
          0x12, 0x0,                  /* FC_UP */
/* 288 */ NdrFcShort( 0xe ),             /* Offset= 14 (302) */
/* 290 */
          0x1b,                      /* FC_CARRAY */
          0x1,                       /* 1 */
/* 292 */ NdrFcShort( 0x2 ),             /* 2 */
/* 294 */ 0x9,                         /* Corr desc: FC ULONG */
          0x0,                       /* */
/* 296 */ NdrFcShort( 0xffff ),           /* -4 */
/* 298 */ NdrFcShort( 0x1 ),             /* Corr flags: early, */
/* 300 */ 0x6,                         /* FC_SHORT */
          0x5b,                      /* FC_END */
/* 302 */
          0x17,                      /* FC_CSTRUCT */
          0x3,                       /* 3 */
/* 304 */ NdrFcShort( 0x8 ),             /* 8 */
/* 306 */ NdrFcShort( 0xfffffffff0 ),      /* Offset= -16 (290) */
/* 308 */ 0x8,                         /* FC_LONG */
          0x8,                       /* FC_LONG */
/* 310 */ 0x5c,                         /* FC_PAD */
          0x5b,                      /* FC_END */
/* 312 */
          0x2f,                      /* FC_IP */
          0x5a,                      /* FC_CONSTANT_IID */
/* 314 */ NdrFcLong( 0x0 ),             /* 0 */
/* 318 */ NdrFcShort( 0x0 ),             /* 0 */
/* 320 */ NdrFcShort( 0x0 ),             /* 0 */
/* 322 */ 0xc0,                         /* 192 */
          0x0,                       /* 0 */
/* 324 */ 0x0,                         /* 0 */
          0x0,                       /* 0 */
/* 326 */ 0x0,                         /* 0 */
          0x0,                       /* 0 */
/* 328 */ 0x0,                         /* 0 */
          0x46,                      /* 70 */
/* 330 */
          0x2f,                      /* FC_IP */
          0x5a,                      /* FC_CONSTANT_IID */
/* 332 */ NdrFcLong( 0x20400 ),           /* 132096 */
/* 336 */ NdrFcShort( 0x0 ),             /* 0 */
/* 338 */ NdrFcShort( 0x0 ),             /* 0 */
/* 340 */ 0xc0,                         /* 192 */
          0x0,                       /* 0 */
/* 342 */ 0x0,                         /* 0 */
          0x0,                       /* 0 */
/* 344 */ 0x0,                         /* 0 */
          0x0,                       /* 0 */
/* 346 */ 0x0,                         /* 0 */
          0x46,                      /* 70 */

```

```

/* 348 */
          0x12, 0x10,                /* FC_UP [pointer_deref] */
/* 350 */ NdrFcShort( 0x2 ),             /* Offset= 2 (352) */
/* 352 */
          0x12, 0x0,                  /* FC_UP */
/* 354 */ NdrFcShort( 0x1e6 ),           /* Offset= 486 (840) */
/* 356 */
          0x2a,                      /* FC_ENCAPSULATED_UNION */
          0x89,                      /* 137 */
/* 358 */ NdrFcShort( 0x20 ),             /* 32 */
/* 360 */ NdrFcShort( 0xa ),             /* 10 */
/* 362 */ NdrFcLong( 0x8 ),              /* 8 */
/* 366 */ NdrFcShort( 0x50 ),           /* Offset= 80 (446) */
/* 368 */ NdrFcLong( 0xd ),              /* 13 */
/* 372 */ NdrFcShort( 0x70 ),           /* Offset= 112 (484) */
/* 374 */ NdrFcLong( 0x9 ),              /* 9 */
/* 378 */ NdrFcShort( 0x90 ),           /* Offset= 144 (522) */
/* 380 */ NdrFcLong( 0xc ),              /* 12 */
/* 384 */ NdrFcShort( 0xb0 ),           /* Offset= 176 (560) */
/* 386 */ NdrFcLong( 0x24 ),              /* 36 */
/* 390 */ NdrFcShort( 0x104 ),            /* Offset= 260 (650) */
/* 392 */ NdrFcLong( 0x800d ),           /* 32781 */
/* 396 */ NdrFcShort( 0x120 ),            /* Offset= 288 (684) */
/* 398 */ NdrFcLong( 0x10 ),              /* 16 */
/* 402 */ NdrFcShort( 0x13a ),           /* Offset= 314 (716) */
/* 404 */ NdrFcLong( 0x2 ),               /* 2 */
/* 408 */ NdrFcShort( 0x150 ),           /* Offset= 336 (744) */
/* 410 */ NdrFcLong( 0x3 ),               /* 3 */
/* 414 */ NdrFcShort( 0x16 ),              /* Offset= 358 (772) */
/* 416 */ NdrFcLong( 0x14 ),              /* 20 */
/* 420 */ NdrFcShort( 0x17c ),            /* Offset= 380 (800) */
/* 422 */ NdrFcShort( 0xfffffffff ),       /* Offset= -1 (421) */
/* 424 */
          0x21,                      /* FC_BOGUS_ARRAY */
          0x3,                       /* 3 */
/* 426 */ NdrFcShort( 0x0 ),             /* 0 */
/* 428 */ 0x19,                         /* Corr desc: field pointer, FC ULONG */
          0x0,                       /* */
/* 430 */ NdrFcShort( 0x0 ),             /* 0 */
/* 432 */ NdrFcShort( 0x1 ),             /* Corr flags: early, */
/* 434 */ NdrFcLong( 0xfffffffff ),        /* -1 */
/* 438 */ NdrFcShort( 0x0 ),             /* Corr flags: */
/* 440 */
          0x12, 0x0,                  /* FC_UP */
/* 442 */ NdrFcShort( 0xfffffff74 ),      /* Offset= -140 (302) */
/* 444 */ 0x5c,                         /* FC_PAD */
          0x5b,                      /* FC_END */
/* 446 */
          0x1a,                      /* FC_BOGUS_STRUCT */
          0x3,                       /* 3 */
/* 448 */ NdrFcShort( 0x10 ),              /* 16 */
/* 450 */ NdrFcShort( 0x0 ),             /* 0 */
/* 452 */ NdrFcShort( 0x6 ),              /* Offset= 6 (458) */
/* 454 */ 0x8,                          /* FC_LONG */
          0x39,                      /* FC_ALIGNM8 */
/* 456 */ 0x36,                         /* FC_POINTER */
          0x5b,                      /* FC_END */
/* 458 */
          0x11, 0x0,                  /* FC_RP */
/* 460 */ NdrFcShort( 0xfffffff7dc ),      /* Offset= -36 (424) */
/* 462 */
          0x21,                      /* FC_BOGUS_ARRAY */
          0x3,                       /* 3 */

```

```

/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x19, /* Corr desc: field pointer, FC ULONG */
           0x0, /* */
/* 468 */ NdrFcShort( 0x0 ), /* 0 */
/* 470 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 472 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 476 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 478 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
           0x0, /* */
           0x0, /* */
/* 480 */ NdrFcShort( 0xfffffff58 ), /* Offset= -168 (312) */
/* 482 */ 0x5c, /* FC_PAD */
           0x5b, /* FC_END */
/* 484 */ 0x1a, /* FC_BOGUS_STRUCT */
           0x3, /* */
/* 486 */ NdrFcShort( 0x10 ), /* 16 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ NdrFcShort( 0x6 ), /* Offset= 6 (496) */
/* 492 */ 0x8, /* FC_LONG */
           0x39, /* FC_ALIGNM8 */
/* 494 */ 0x36, /* FC_POINTER */
           0x5b, /* FC_END */
/* 496 */ 0x11, 0x0, /* FC_RP */
/* 498 */ NdrFcShort( 0xfffffffdc ), /* Offset= -36 (462) */
/* 500 */ 0x21, /* FC_BOGUS_ARRAY */
           0x3, /* */
/* 502 */ NdrFcShort( 0x0 ), /* 0 */
/* 504 */ 0x19, /* Corr desc: field pointer, FC ULONG */
           0x0, /* */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 510 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 514 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
           0x0, /* */
           0x0, /* */
/* 518 */ NdrFcShort( 0xfffffff44 ), /* Offset= -188 (330) */
/* 520 */ 0x5c, /* FC_PAD */
           0x5b, /* FC_END */
/* 522 */ 0x1a, /* FC_BOGUS_STRUCT */
           0x3, /* */
/* 524 */ NdrFcShort( 0x10 ), /* 16 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8, /* FC_LONG */
           0x39, /* FC_ALIGNM8 */
/* 532 */ 0x36, /* FC_POINTER */
           0x5b, /* FC_END */
/* 534 */ 0x11, 0x0, /* FC_RP */
/* 536 */ NdrFcShort( 0xfffffffdc ), /* Offset= -36 (500) */
/* 538 */ 0x21, /* FC_BOGUS_ARRAY */
           0x3, /* */
/* 540 */ NdrFcShort( 0x0 ), /* 0 */
/* 542 */ 0x19, /* Corr desc: field pointer, FC ULONG */
           0x0, /* */
           0x0, /* */
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 548 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 552 */ NdrFcShort( 0x0 ), /* Corr flags: */

```

```

/* 554 */ 0x12, 0x0, /* FC_UP */
/* 556 */ NdrFcShort( 0x176 ), /* Offset= 374 (930) */
/* 558 */ 0x5c, /* FC_PAD */
           0x5b, /* FC_END */
/* 560 */ 0x1a, /* FC_BOGUS_STRUCT */
           0x3, /* */
/* 562 */ NdrFcShort( 0x10 ), /* 16 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ NdrFcShort( 0x6 ), /* Offset= 6 (572) */
/* 568 */ 0x8, /* FC_LONG */
           0x39, /* FC_ALIGNM8 */
/* 570 */ 0x36, /* FC_POINTER */
           0x5b, /* FC_END */
/* 572 */ 0x11, 0x0, /* FC_RP */
/* 574 */ NdrFcShort( 0xfffffffdc ), /* Offset= -36 (538) */
/* 576 */ 0x2f, /* FC_IP */
           0x5a, /* FC_CONSTANT_IID */
/* 578 */ NdrFcLong( 0x2f ), /* 47 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ NdrFcShort( 0x0 ), /* 0 */
/* 586 */ 0xc0, /* 192 */
           0x0, /* 0 */
/* 588 */ 0x0, /* 0 */
           0x0, /* 0 */
/* 590 */ 0x0, /* 0 */
           0x0, /* 0 */
/* 592 */ 0x0, /* 0 */
           0x46, /* 70 */
/* 594 */ 0x1b, /* FC_CARRAY */
           0x0, /* 0 */
/* 596 */ NdrFcShort( 0x1 ), /* 1 */
/* 598 */ 0x19, /* Corr desc: field pointer, FC ULONG */
           0x0, /* */
           0x0, /* */
/* 600 */ NdrFcShort( 0x4 ), /* 4 */
/* 602 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 604 */ 0x1, /* FC_BYTE */
           0x5b, /* FC_END */
/* 606 */ 0x1a, /* FC_BOGUS_STRUCT */
           0x3, /* */
/* 608 */ NdrFcShort( 0x18 ), /* 24 */
/* 610 */ NdrFcShort( 0x0 ), /* 0 */
/* 612 */ NdrFcShort( 0xc ), /* Offset= 12 (624) */
/* 614 */ 0x8, /* FC_LONG */
           0x8, /* FC_LONG */
/* 616 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
           0x0, /* 0 */
/* 618 */ NdrFcShort( 0xfffffff6 ), /* Offset= -42 (576) */
/* 620 */ 0x39, /* FC_ALIGNM8 */
           0x36, /* FC_POINTER */
/* 622 */ 0x5c, /* FC_PAD */
           0x5b, /* FC_END */
/* 624 */ 0x12, 0x0, /* FC_UP */
/* 626 */ NdrFcShort( 0xffffffe0 ), /* Offset= -32 (594) */
/* 628 */ 0x21, /* FC_BOGUS_ARRAY */
           0x3, /* */

```

```

/* 630 */ NdrFcShort( 0x0 ), /* 0 */
/* 632 */ 0x19, /* Corr desc: field pointer, FC ULONG */
           0x0, /* */
/* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 636 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 638 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 642 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 644 */
           0x12, 0x0, /* FC_UP */
/* 646 */ NdrFcShort( 0xfffffff8 ), /* Offset= -40 (606) */
/* 648 */ 0x5c, /* FC_PAD */
           0x5b, /* FC_END */
/* 650 */
           0x1a, /* FC_BOGUS_STRUCT */
           0x3, /* 3 */
/* 652 */ NdrFcShort( 0x10 ), /* 16 */
/* 654 */ NdrFcShort( 0x0 ), /* 0 */
/* 656 */ NdrFcShort( 0x6 ), /* Offset= 6 (662) */
           /* FC_LONG */
           0x39, /* FC_ALIGNM8 */
/* 660 */ 0x36, /* FC_POINTER */
           0x5b, /* FC_END */
/* 662 */
           0x11, 0x0, /* FC_RP */
/* 664 */ NdrFcShort( 0xfffffff8 ), /* Offset= -36 (628) */
/* 666 */
           0x1d, /* FC_SMFARRAY */
           0x0, /* 0 */
/* 668 */ NdrFcShort( 0x8 ), /* 8 */
/* 670 */ 0x1, /* FC_BYT */
           0x5b, /* FC_END */
/* 672 */
           0x15, /* FC_STRUCT */
           0x3, /* 3 */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ 0x8, /* FC_LONG */
           0x6, /* FC_SHORT */
/* 678 */ 0x6, /* FC_SHORT */
           0x4c, /* FC_EMBEDDED_COMPLEX */
/* 680 */ 0x0,
           NdrFcShort( 0xffffffff ), /* Offset= -15 (666) */
           0x5b, /* FC_END */
/* 684 */
           0x1a, /* FC_BOGUS_STRUCT */
           0x3, /* 3 */
/* 686 */ NdrFcShort( 0x20 ), /* 32 */
/* 688 */ NdrFcShort( 0x0 ), /* 0 */
/* 690 */ NdrFcShort( 0xa ), /* Offset= 10 (700) */
           /* FC_LONG */
           0x39, /* FC_ALIGNM8 */
/* 694 */ 0x36, /* FC_POINTER */
           0x4c, /* FC_EMBEDDED_COMPLEX */
/* 696 */ 0x0,
           NdrFcShort( 0xffffffe7 ), /* Offset= -25 (672) */
           0x5b, /* FC_END */
/* 700 */
           0x11, 0x0, /* FC_RP */
/* 702 */ NdrFcShort( 0xfffffff10 ), /* Offset= -240 (462) */
/* 704 */
           0x1b, /* FC_CARRAY */
           0x0, /* 0 */
/* 706 */ NdrFcShort( 0x1 ), /* 1 */
/* 708 */ 0x19, /* Corr desc: field pointer, FC ULONG */
           0x0, /* */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
           /* FC_BYT */
           0x5b, /* FC_END */
/* 716 */
           0x1a, /* FC_BOGUS_STRUCT */
           0x3, /* 3 */
/* 718 */ NdrFcShort( 0x10 ), /* 16 */
/* 720 */ NdrFcShort( 0x0 ), /* 0 */
/* 722 */ NdrFcShort( 0x6 ), /* Offset= 6 (728) */
           /* FC_LONG */
           0x39, /* FC_ALIGNM8 */
/* 726 */ 0x36, /* FC_POINTER */
           0x5b, /* FC_END */
/* 728 */
           0x12, 0x0, /* FC_UP */
/* 730 */ NdrFcShort( 0xffffffe6 ), /* Offset= -26 (704) */
/* 732 */
           0x1b, /* FC_CARRAY */
           0x1, /* 1 */
/* 734 */ NdrFcShort( 0x2 ), /* 2 */
/* 736 */ 0x19, /* Corr desc: field pointer, FC ULONG */
           0x0, /* */
/* 738 */ NdrFcShort( 0x0 ), /* 0 */
/* 740 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
           /* FC_SHORT */
           0x5b, /* FC_END */
/* 744 */
           0x1a, /* FC_BOGUS_STRUCT */
           0x3, /* 3 */
/* 746 */ NdrFcShort( 0x10 ), /* 16 */
/* 748 */ NdrFcShort( 0x0 ), /* 0 */
/* 750 */ NdrFcShort( 0x6 ), /* Offset= 6 (756) */
           /* FC_LONG */
           0x39, /* FC_ALIGNM8 */
/* 754 */ 0x36, /* FC_POINTER */
           0x5b, /* FC_END */
/* 756 */
           0x12, 0x0, /* FC_UP */
/* 758 */ NdrFcShort( 0xffffffe6 ), /* Offset= -26 (732) */
/* 760 */
           0x1b, /* FC_CARRAY */
           0x3, /* 3 */
/* 762 */ NdrFcShort( 0x4 ), /* 4 */
/* 764 */ 0x19, /* Corr desc: field pointer, FC ULONG */
           0x0, /* */
/* 766 */ NdrFcShort( 0x0 ), /* 0 */
/* 768 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
           /* FC_LONG */
           0x5b, /* FC_END */
/* 772 */
           0x1a, /* FC_BOGUS_STRUCT */
           0x3, /* 3 */
/* 774 */ NdrFcShort( 0x10 ), /* 16 */
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ NdrFcShort( 0x6 ), /* Offset= 6 (784) */
           /* FC_LONG */
           0x39, /* FC_ALIGNM8 */
/* 782 */ 0x36, /* FC_POINTER */
           0x5b, /* FC_END */
/* 784 */
           0x12, 0x0, /* FC_UP */

```

```

/* 786 */ NdrFcShort( 0xffffffe6 ),      /* Offset= -26 (760) */
/* 788 */
          0x1b,                      /* FC_CARRAY */
          0x7,                       /* 7 */
/* 790 */ NdrFcShort( 0x8 ),       /* 8 */
/* 792 */ 0x19,                   /* Corr desc: field pointer, FC ULONG */
          0x0,                       /* */
/* 794 */ NdrFcShort( 0x0 ),       /* 0 */
/* 796 */ NdrFcShort( 0x1 ),       /* Corr flags: early, */
/* 798 */ 0xb,                    /* FC_HYPER */
          0x5b,                      /* FC_END */
/* 800 */
          0x1a,                      /* FC_BOGUS_STRUCT */
          0x3,                       /* 3 */
/* 802 */ NdrFcShort( 0x10 ),      /* 16 */
/* 804 */ NdrFcShort( 0x0 ),       /* 0 */
/* 806 */ NdrFcShort( 0x6 ),       /* Offset= 6 (812) */
/* 808 */ 0x8,                    /* FC_LONG */
          0x39,                      /* FC_ALIGNM8 */
/* 810 */ 0x36,                   /* FC_POINTER */
          0x5b,                      /* FC_END */
/* 812 */
          0x12, 0x0,                /* FC_UP */
/* 814 */ NdrFcShort( 0xffffffe6 ), /* Offset= -26 (788) */
/* 816 */
          0x15,                      /* FC_STRUCT */
          0x3,                       /* 3 */
/* 818 */ NdrFcShort( 0x8 ),       /* 8 */
/* 820 */ 0x8,                    /* FC_LONG */
          0x8,                       /* FC_LONG */
/* 822 */ 0x5c,                   /* FC_PAD */
          0x5b,                      /* FC_END */
/* 824 */
          0x1b,                      /* FC_CARRAY */
          0x3,                       /* 3 */
/* 826 */ NdrFcShort( 0x8 ),       /* 8 */
/* 828 */ 0x7,                   /* Corr desc: FC USHORT */
          0x0,                       /* */
/* 830 */ NdrFcShort( 0xffffc8 ),   /* -56 */
/* 832 */ NdrFcShort( 0x1 ),       /* Corr flags: early, */
/* 834 */ 0x4c,                   /* FC_EMBEDDED_COMPLEX */
          0x0,                       /* 0 */
/* 836 */ NdrFcShort( 0xfffffec ),  /* Offset= -20 (816) */
/* 838 */ 0x5c,                   /* FC_PAD */
          0x5b,                      /* FC_END */
/* 840 */
          0x1a,                      /* FC_BOGUS_STRUCT */
          0x3,                       /* 3 */
/* 842 */ NdrFcShort( 0x38 ),     /* 56 */
/* 844 */ NdrFcShort( 0xfffffffec ), /* Offset= -20 (824) */
/* 846 */ NdrFcShort( 0x0 ),       /* Offset= 0 (846) */
/* 848 */ 0x6,                    /* FC_SHORT */
          0x6,                       /* FC_SHORT */
/* 850 */ 0x38,                   /* FC_ALIGNM4 */
          0x8,                       /* FC_LONG */
/* 852 */ 0x8,                    /* FC_LONG */
          0x4c,                      /* FC_EMBEDDED_COMPLEX */
/* 854 */ 0x4,                    /* 4 */
          NdrFcShort( 0xfffffe0d ),   /* Offset= -499 (356) */
          0x5b,                      /* FC_END */
/* 858 */
          0x12, 0x0,                /* FC_UP */
/* 860 */ NdrFcShort( 0xfffffff02 ), /* Offset= -254 (606) */

```

```

/* 862 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x1,                       /* FC_BYTE */
/* 864 */
          0x5c,                      /* FC_PAD */
/* 866 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 868 */
          0x12, 0x6,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 870 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 872 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 874 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 876 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 878 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 880 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 882 */
          0x12, 0x0,                /* FC_UP */
/* 884 */ NdrFcShort( 0xfffffd4 ), /* Offset= -604 (280) */
/* 886 */
          0x12, 0x10,                /* FC_UP [pointer_deref] */
/* 888 */ NdrFcShort( 0xfffffd4 ), /* Offset= -602 (286) */
/* 890 */
          0x12, 0x10,                /* FC_UP [pointer_deref] */
/* 892 */ NdrFcShort( 0xfffffd6 ), /* Offset= -580 (312) */
/* 894 */
          0x12, 0x10,                /* FC_UP [pointer_deref] */
/* 896 */ NdrFcShort( 0xfffffdca ), /* Offset= -566 (330) */
/* 898 */
          0x12, 0x10,                /* FC_UP [pointer_deref] */
/* 900 */ NdrFcShort( 0xfffffd8 ), /* Offset= -552 (348) */
/* 902 */
          0x12, 0x10,                /* FC_UP [pointer_deref] */
/* 904 */ NdrFcShort( 0x2 ),      /* Offset= 2 (906) */
/* 906 */
          0x12, 0x0,                /* FC_UP */
/* 908 */ NdrFcShort( 0x16 ),     /* Offset= 22 (930) */
/* 910 */
          0x15,                      /* FC_STRUCT */
          0x7,                       /* 7 */
/* 912 */ NdrFcShort( 0x10 ),     /* 16 */
/* 914 */
          0x1,                       /* FC_SHORT */
          0x1,                       /* FC_BYTE */
/* 916 */
          0x38,                      /* FC_ALIGNM4 */
          0x1,                       /* FC_BYTE */
/* 918 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x39,                      /* FC_ALIGNM8 */
/* 920 */
          0x12, 0xb,                /* FC_HYPER */
          0x5b,                      /* FC_END */
/* 922 */
          0x12, 0x0,                /* FC_UP */
/* 924 */ NdrFcShort( 0xfffffff2 ), /* Offset= -14 (910) */
/* 926 */
          0x12, 0x8,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 928 */
          0x12, 0x2,                /* FC_UP [simple_pointer] */
          0x5c,                      /* FC_PAD */
/* 930 */
          0x1a,                      /* FC_BOGUS_STRUCT */
          0x7,                       /* 7 */

```

```

/* 932 */ NdrFcShort( 0x20 ), /* 32 */
/* 934 */ NdrFcShort( 0x0 ), /* 0 */
/* 936 */ NdrFcShort( 0x0 ), /* Offset= 0 (936) */
/* 938 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 940 */ 0x6,
0x6, /* FC_SHORT */
/* 942 */ 0x6,
0x6, /* FC_SHORT */
/* 944 */ 0x4c,
0x6, /* FC_SHORT */
/* 946 */ NdrFcShort( 0xfffffc54 ), /* Offset= -940 (6) */
/* 948 */ 0x5c,
0x5b, /* FC_PAD */
/* 950 */ 0xb4,
0x5b, /* FC_END */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x18 ), /* 24 */
/* 956 */ NdrFcShort( 0x0 ), /* 0 */
/* 958 */ NdrFcShort( 0xfffffc44 ), /* Offset= -956 (2) */
/* 960 */ 0x11, 0x4, /* FC_RP [alloced_on_stack] */
/* 962 */ NdrFcShort( 0x6 ), /* Offset= 6 (968) */
/* 964 */ 0x13, 0x0, /* FC_OP */
/* 966 */ NdrFcShort( 0xfffffdc ), /* Offset= -36 (930) */
/* 968 */ 0xb4,
0x83, /* FC_USER_MARSHAL */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x18 ), /* 24 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffffff4 ), /* Offset= -12 (964) */
0x0
};

const CIInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
    ( CIInterfaceProxyVtbl * ) &_ITPCCProxyVtbl,
    0
};

const CIInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
    ( CIInterfaceStubVtbl * ) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n) IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID, n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(! _tpcc_com_ps_CHECK_IID(0))

```

```

    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName * ) &_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    &_tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* defined(_M_IA64) || defined(_M_AXP64)*/

```

tpcc_com_si.rgs

```

HKCR
{
    TPCC.StockLevel.1 = s 'StockLevel Class'
    {
        CLSID = s '{2668369E-A50D-11D2-BA4E-00C04FBFE08B}'
    }
    TPCC.StockLevel = s 'StockLevel Class'
    {
        CurVer = s 'TPCC.StockLevel.1'
    }
    NoRemove CLSID
    {
        ForceRemove {2668369E-A50D-11D2-BA4E-00C04FBFE08B} = s
        'StockLevel Class'
        {
            ProgID = s 'TPCC.StockLevel.1'
            VersionIndependentProgID = s 'TPCC.StockLevel'
            InprocServer32 = s '%MODULE%'
            {
                val ThreadingModel = s 'Both'
            }
        }
    }
}

```

tpcc_dbllib.cpp

```

/*
 *          FILE:           TPCC_DBLIB.CPP
 *          Microsoft TPC-C Kit Ver. 4.20.000
 *          Copyright Microsoft, 1999
 *
 *          All Rights Reserved
 *

```

```

*
* Performance Metrics, 3/17/99          Version 4.10.000 audited by Richard Gimarc,
*
* PURPOSE: Implements dblib calls for TPC-C txns.
* Contact: Charles Levine (clevine@microsoft.com)
*
* Change history:
*           4.20.000 - updated rev number to match kit
*           4.10.001 - not deleting error class in catch handler on deadlock
retry;
*                               not a functional bug, but a memory leak
*                               - had to tweak some declarations to compile
with latest SDK; no functional change
*/
#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "../common/src/error.h"
#include "../common/src/trans.h"
#include "../common/src/txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE          4096

// version string; must match return value from tpcc_version stored proc
const char      sVersion[] = "4.10.000";

const           iMaxRetries = 10;           // how many retries on
deadlock
static long     iConnectionCount = 0;       // number of current dblib connections

const int       iErrOleDbProvider = 7312;
const char      sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit();           // initialize dblib
            break;

        case DLL_PROCESS_DETACH:
            dbexit();          // close all dblib
structures/connections
            break;

        default:
            /* nothing */;
    }
}

```

```

}
return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr, LPCSTR
dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB           *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity, dberr, oserr, dberrstr, oserrstr
);
    }
    return INT_CANCEL;
}

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library SQL Server error messages
*
* ARGUMENTS: DBPROCESS           *dbproc           DBPROCESS id
pointer
*                         DBINT             msgno
*                         message number
*                         int
*                         msgstate          message state
*                         int
*                         severity         message severity
*                         char             *msgtext
*                         printable message description
*
* RETURNS:           int
*                         continue if error is SQLETIME else INT_CANCEL action
*                         INT_CONTINUE
*
*                         INT_CANCEL           cancel operation
*
* COMMENTS: This function also sets the dead lock dbproc variable if
necessary.
*
*/
// typedef INT (SQLAPI *DBMSHANDLE_PROC)(PDBPROCESS, DBINT, INT, INT, LPCSTR,
LPCSTR, LPCSTR, DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int severity,
LPCSTR msgtext, LPCSTR srvname, LPCSTR
procname, DBUSMALLINT line)
{
    CTPCC_DBLIB           *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno, msgstate, severity, msgtext );
    }
}

```

```

        return 0;
    }

/* FUNCTION: void UtilStrCpy(char * pDest, char * pSrc, int n)
 *
 * PURPOSE:      This function copies n characters from string pSrc to pDest and
places a
 *                  null character at the end of the destination string.
 *
 * ARGUMENTS:    char          *pDest      destination string
pointer
 *                  char          *pSrc
source string pointer
 *                  int           n
number of characters to copy
 *
 * RETURNS:      None
 *
 * COMMENTS:     Unlike strcpy this function ensures that the result string is
 *                  always null terminated.
 */
inline static void UtilStrCpy(char * pDest, const BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
 */
char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
          "Wrong version of stored
procs on database server" },
        { ERR_INVALID_CUST,
          "Invalid Customer
id,name." },
        { ERR_NO SUCH ORDER,
          "No orders found for
customer." },
        { ERR_RETRYED_TRANS,
          "Retries before
transaction succeeded." },
        { 0,               "" }
    };

    static char szNotFound[] = "Unknown error number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno == errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )

```

```

        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer,           // name of SQL server
    LPCSTR szUser,             // user name for login
    LPCSTR szPassword,         // password for login
    LPCSTR szHost,             // workstation name; shows up in
sp_who; max 30 chars, only first 10 kept by SQL Server
    LPCSTR szDatabase )        // name of database to use
{
    return new CTPCC_DBLIB( szServer, szUser, szPassword, szHost, szDatabase
);
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer,           // name of SQL server
    LPCSTR szUser,             // user name for login
    LPCSTR szPassword,         // password for login
    LPCSTR szHost,             // workstation name; shows up in
sp_who; max 30 chars, only first 10 kept by SQL Server
    LPCSTR szDatabase )        // name of database to use
{
    LOGINREC *login;
    const BYTE *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

    m_MaxRetries = 10;          // how many retries on deadlock

    // increase max number of connections if getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5) )
    {
        if ( dbsetmaxprocs(iConnectionCount+10) == FAIL )
            ThrowError(CDBLIBERR::eDbSetMaxProcs);
    }

    // allocate a login structure
    login = dblogin();
    if ( login == NULL )
        ThrowError(CDBLIBERR::eLogin);
    InterlockedIncrement( &iConnectionCount );

    // register error and message handler functions
    if (dbprocerrhandle(login, err_handler) == NULL)
        ThrowError(CDBLIBERR::eDbProcHandler);

    if (dbprocmsghandle(login, msg_handler) == NULL)
        ThrowError(CDBLIBERR::eDbProcHandler);

    DBSETLUSER(login, szUser);
    DBSETLPWD(login, szPassword);
    DBSETLHOST(login, szHost);
    DBSETLPACKET(login, (unsigned short)DEFCLPACKSIZE);
}

```

```

DBSETLVERSION(login, DBVER60); // use dblib ver 6.0
client behavior

// set time to wait for login
if (dbsetlogintime(60) == FAIL)
    ThrowError(CDBLIBERR::eDbSet);

// set time to wait for statement execution
if (dbsettime(180) == FAIL)
    ThrowError(CDBLIBERR::eDbSet);

m_dbproc = dbopen(login, szServer);

// deallocate login structure before checking for success
dbfreelogin( login );

if (m_dbproc == NULL)
    ThrowError(CDBLIBERR::eDbOpen);

// save address of class instance so that the message and error handler
// can get to data.
dbsetuserdata(m_dbproc, (LPVOID)this);

// Use the the right database
if (dbuse(m_dbproc, szDatabase) == FAIL)
    ThrowError(CDBLIBERR::eDbUse);

dbcmd(m_dbproc, "set nocount on"); // do not
return row counts
dbcmd(m_dbproc, "set XACT_ABORT ON"); // rollback transaction
on abort

if (dbsqlexec(m_dbproc) == FAIL)
    ThrowError(CDBLIBERR::eDbSqlExec);

DiscardNextResults(2);

// verify that version of stored procs on server is correct
dbrpcinit(m_dbproc, "tpcc_version", 0);

if (dbrpcexec(m_dbproc) == FAIL)
    ThrowError(CDBLIBERR::eDbRpcExec);

if (dbresults(m_dbproc) != SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);

if (dbnextrow(m_dbproc) != REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

char szSrvVersion[16];
pData=dbdata(m_dbproc, 1);
if (pData)
    UtilStrCpy(szSrvVersion, pData, dbdatlen(m_dbproc, 1));
else
    szSrvVersion[0]=0;
if (strcmp(szSrvVersion,sVersion))
    throw new CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION
);

DiscardNextRows(0);
DiscardNextResults(0);
}

```

```

CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int dberr, int oserr, LPCSTR dberrstr,
LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr, oserr);

    if (dberrstr != NULL)
    {
        m_DbLibErr->m_dberrstr = new char[ strlen(dberrstr)+1 ];
        strcpy( m_DbLibErr->m_dberrstr, dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new char[ strlen(oserrstr)+1 ];
        strcpy( m_DbLibErr->m_oserrstr, oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno, int msgstate, int severity,
LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[ strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext, msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if yes, throw it and ignore any
    DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLERR *pSqlErr;
        pSqlErr = m_SqlErr;
    }
}

```

```

        m_SqlErr = NULL;      // clear our pointer to instance; catch
handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to happen, since it means that an
error was returned
        // but the error handlers were not called.
    pDbLibErr = new CDBLIBERR(eAction);
else
{
    pDbLibErr = m_DbLibErr;
    pDbLibErr->m_eAction = eAction;
    m_DbLibErr = NULL;          // clear our pointer to instance;
catch handler will delete
}
throw pDbLibErr;
}

// Read and discard rows until no more. Throw an exception if number of rows read
doesn't
// match number of rows expected. The row count will be ignored if the expected
count value
// passed in is negative. A typical use of this routine is to verify that there are
no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int             iRowsRead = 0;
    RETCODE         rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >= 0)
                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }
    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iRowsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

// Read and discard results until no more. Throw an exception if number of result
sets read doesn't
// match number expected. The result set count will be ignored if the expected
count value
// passed in is negative. A typical use of this routine is to verify that there are
no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int iExpectedCount)
{

```

```

int             iResultsRead = 0;
RETCODE         rc;

while (TRUE)
{
    rc = dbresults(m_dbproc);
    if (rc == NO_MORE_RESULTS)
        break;
    if (rc == FAIL)
    {
        if (iExpectedCount >= 0)
            ThrowError(CDBLIBERR::eDbResults);
        else
            break;
    }
    DiscardNextRows(-1);
    iResultsRead++;
}

if ((iExpectedCount >= 0) &&
    (iExpectedCount != iResultsRead))
    ThrowError(CDBLIBERR::eWrongRowCount);
}

void CTPCC_DBLIB::StockLevel()
{
    int             iTryCount = 0;
    const BYTE      *pData;
    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_stocklevel", 0);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1, (BYTE
*) &m_txn.StockLevel.w_id);           // @w_id smallint
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE
*) &m_txn.StockLevel.d_id);           // @d_id tinyint
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1, (BYTE
*) &m_txn.StockLevel.threshold);       // @threshold smallint

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (pData=dbdata(m_dbproc, 1))
                m_txn.StockLevel.low_stock = *((long *) pData);

            DiscardNextRows(0);
            DiscardNextResults(0);

            m_txn.StockLevel.exec_status_code = eOK;
            return;
        }
    }
}

```

```

        }

    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
            (e->m_msgno == iErrOleDbProvider &&
            strstr(e->m_msgtext, sErrTimeoutExpired) !=

NULL) &&
longer period
{
            (++iTryCount <= iMaxRetries))
            // hit deadlock; backoff for increasingly
            delete e;
            Sleep(10 * iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)

    //if (iTryCount)
    //    throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
    iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                                i;
    DBINT      commit_flag;
    DBDATETIME   datetime;
    DBDATEREC daterec;

    int          iTryCount = 0;
    const BYTE   *pData;
    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_neworder", 0);

*) &m_txn.NewOrder.w_id;
*) &m_txn.NewOrder.d_id;
*) &m_txn.NewOrder.c_id;
*) &m_txn.NewOrder.o.ol_cnt;

            // check whether any order lines are for a remote
warehouse
            m_txn.NewOrder.o.all_local = 1;
            for (i = 0; i < m_txn.NewOrder.o.ol_cnt; i++)
            {
                if (m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o.all_local = 0;
                    break;
                }
            }
            if ((e->m_msgno == 1205 ||
                (e->m_msgno == iErrOleDbProvider &&
                strstr(e->m_msgtext, sErrTimeoutExpired) !=

NULL) &&
longer period
{
                (++iTryCount <= iMaxRetries))
                // hit deadlock; backoff for increasingly
                delete e;
                Sleep(10 * iTryCount);
            }
            else
                throw;
        }
        // while (TRUE)

        //if (iTryCount)
        //    throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
        iTryCount);
    }

    dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE
*) &m_txn.NewOrder.o.all_local);

    for (i = 0; i < m_txn.NewOrder.o.ol_cnt; i++)
    {
        dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -
1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -
1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -
1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
    }

    if (dbrpcexec(m_dbproc) == FAIL)
        ThrowError(CDBLIBERR::eDbRpcExec);

    // Get order line results
    m_txn.NewOrder.total_amount = 0;
    for (i = 0; i < m_txn.NewOrder.o.ol_cnt; i++)
    {
        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnumcols(m_dbproc) != 5)
            ThrowError(CDBLIBERR::eWrongNumCols);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (pData=dbdata(m_dbproc, 1))
            UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name, pData, dbdatlen(m_dbproc, 1));
        if (pData=dbdata(m_dbproc, 2))
            m_txn.NewOrder.OL[i].ol_stock =
(*DBSMALLINT *) pData;
        if (pData=dbdata(m_dbproc, 3))
            UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_generic, pData,
dbdatlen(m_dbproc, 3));
        if (pData=dbdata(m_dbproc, 4))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 4),
*) &m_txn.NewOrder.OL[i].ol_i_price, 8);
        if (pData=dbdata(m_dbproc, 5))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 5),
*) &m_txn.NewOrder.OL[i].ol_amount, 8);

        m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount + m_txn.NewOrder.OL[i].ol_amount;
        DiscardNextRows(0);
    }
}

```

```

        // get remaining values for w_tax, d_tax, o_id,
c_last, c_discount, c_credit, o_entry_d, commit_flag
        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc) != 8)
            ThrowError(CDBLIBERR::eWrongNumCols);

        if (pData=dbdata(m_dbproc, 1))

            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE *)&m_txn.NewOrder.w_tax, 8);
            if (pData=dbdata(m_dbproc, 2))

                dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE *)&m_txn.NewOrder.d_tax, 8);
                if (pData=dbdata(m_dbproc, 3))
                    m_txn.NewOrder.o_id = (*(DBINT *) pData);
                if (pData=dbdata(m_dbproc, 4))
                    UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
                if (pData=dbdata(m_dbproc, 5))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE *)&m_txn.NewOrder.c_discount,
8);
                if (pData=dbdata(m_dbproc, 6))
                    UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
                if (pData=dbdata(m_dbproc, 7))
                {
                    datetime = *((DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.NewOrder.o_entry_d.year =
daterec.year;
                    m_txn.NewOrder.o_entry_d.month =
daterec.month;
                    m_txn.NewOrder.o_entry_d.day =
daterec.day;
                    m_txn.NewOrder.o_entry_d.hour =
daterec.hour;
                    m_txn.NewOrder.o_entry_d.minute =
daterec.minute;
                    m_txn.NewOrder.o_entry_d.second =
daterec.second;
                }
                if (pData=dbdata(m_dbproc, 8))
                    commit_flag = (*(DBTINYINT *) pData);

DiscardNextRows(0);
DiscardNextResults(0);

                if (commit_flag == 1)
                {
                    m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 - m_txn.NewOrder.c_discount));
                    m_txn.NewOrder.exec_status_code = eOK;
                }
            else

```

```

eInvalidItem;

m_txn.NewOrder.exec_status_code =

return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205 ||
(e->m_msgno == iErrOleDbProvider &&
strstr(e->m_msgrtext, sErrTimeoutExpired) !=
NULL)) &&
longer period
{
    (++iTryCount <= iMaxRetries))
    {
        // hit deadlock; backoff for increasingly
        delete e;
        Sleep(10 * iTryCount);
    }
    else
        throw;
}
// while (TRUE)
}
if (iTryCount)
// throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME           datetime;
    DBDATEREC             daterec;
    int                  iTryCount = 0;
    const BYTE            *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            drpcinit(m_dbproc, "tpcc_payment", 0);
            drpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1, (BYTE
*) &m_txn.Payment.w_id);
            drpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1, (BYTE
*) &m_txn.Payment.c_w_id);
            drpcparam(m_dbproc, NULL, 0, SQLFLT8, -1, -1, (BYTE
*) &m_txn.Payment.h_amount);
            drpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE
*) &m_txn.Payment.d_id);
            drpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE
*) &m_txn.Payment.c_d_id);
            drpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE
*) &m_txn.Payment.c_id);

            // if customer id is zero, then payment is by name
            if (m_txn.Payment.c_id == 0)
                drpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char *)m_txn.Payment.c_last);
        }

```

```

if (dbrpcexec(m_dbproc) == FAIL)
    ThrowError(CDBLIBERR::eDbRpcExec);

if (dbresults(m_dbproc) != SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);

if (dbnextrow(m_dbproc) != REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

if (dbnumcols(m_dbproc) != 27)
    ThrowError(CDBLIBERR::eWrongNumCols);

if (pData=dbdata(m_dbproc, 1))
    m_txn.Payment.c_id = *((DBINT *) pData);
if (pData=dbdata(m_dbproc, 2))
    UtilStrCpy(m_txn.Payment.c_last, pData,
               dbdatlen(m_dbproc, 2));

if (pData=dbdata(m_dbproc, 3))
{
    datetime = *((DBDATETIME *) pData);
    dbdatecrack(m_dbproc, &daterec, &datetime);
    m_txn.Payment.h_date.year = daterec.year;
    m_txn.Payment.h_date.month = daterec.month;
    m_txn.Payment.h_date.day = daterec.day;
    m_txn.Payment.h_date.hour = daterec.hour;
    m_txn.Payment.h_date.minute =
        m_txn.Payment.h_date.second =
}

if (pData=dbdata(m_dbproc, 4))
    UtilStrCpy(m_txn.Payment.w_street_1, pData,
               dbdatlen(m_dbproc, 4));

if (pData=dbdata(m_dbproc, 5))
    UtilStrCpy(m_txn.Payment.w_street_2, pData,
               dbdatlen(m_dbproc, 5));

if (pData=dbdata(m_dbproc, 6))
    UtilStrCpy(m_txn.Payment.w_city, pData,
               dbdatlen(m_dbproc, 6));

if (pData=dbdata(m_dbproc, 7))
    UtilStrCpy(m_txn.Payment.w_state, pData,
               dbdatlen(m_dbproc, 7));

if (pData=dbdata(m_dbproc, 8))
    UtilStrCpy(m_txn.Payment.w_zip, pData,
               dbdatlen(m_dbproc, 8));

if (pData=dbdata(m_dbproc, 9))
    UtilStrCpy(m_txn.Payment.d_street_1, pData,
               dbdatlen(m_dbproc, 9));

if (pData=dbdata(m_dbproc, 10))
    UtilStrCpy(m_txn.Payment.d_street_2, pData,
               dbdatlen(m_dbproc, 10));

if (pData=dbdata(m_dbproc, 11))
    UtilStrCpy(m_txn.Payment.d_city, pData,
               dbdatlen(m_dbproc, 11));

if (pData=dbdata(m_dbproc, 12))
    UtilStrCpy(m_txn.Payment.d_state, pData,
               dbdatlen(m_dbproc, 12));

if (pData=dbdata(m_dbproc, 13))
    UtilStrCpy(m_txn.Payment.d_zip, pData,
               dbdatlen(m_dbproc, 13));

if (pData=dbdata(m_dbproc, 14))
    UtilStrCpy(m_txn.Payment.c_first, pData,
               dbdatlen(m_dbproc, 14));

```

```

dbdatlen(m_dbproc, 15));
if (pData=dbdata(m_dbproc, 16))
    UtilStrCpy(m_txn.Payment.c_middle, pData,
               dbdatlen(m_dbproc, 16));
if (pData=dbdata(m_dbproc, 17))
    UtilStrCpy(m_txn.Payment.c_street_1, pData,
               dbdatlen(m_dbproc, 17));
if (pData=dbdata(m_dbproc, 18))
    UtilStrCpy(m_txn.Payment.c_city, pData,
               dbdatlen(m_dbproc, 18));
if (pData=dbdata(m_dbproc, 19))
    UtilStrCpy(m_txn.Payment.c_state, pData,
               dbdatlen(m_dbproc, 19));
if (pData=dbdata(m_dbproc, 20))
    UtilStrCpy(m_txn.Payment.c_zip, pData,
               dbdatlen(m_dbproc, 20));
if (pData=dbdata(m_dbproc, 21))
    UtilStrCpy(m_txn.Payment.c_phone, pData,
               dbdatlen(m_dbproc, 21));
if (pData=dbdata(m_dbproc, 22))
{
    datetime = *((DBDATETIME *) pData);
    dbdatecrack(m_dbproc, &daterec, &datetime);
    m_txn.Payment.c_since.year = daterec.year;
    m_txn.Payment.c_since.month =
        m_txn.Payment.c_since.day = daterec.day;
    m_txn.Payment.c_since.hour = daterec.hour;
    m_txn.Payment.c_since.minute =
        m_txn.Payment.c_since.second =
}

if (pData=dbdata(m_dbproc, 23))
    UtilStrCpy(m_txn.Payment.c_credit, pData,
               dbdatlen(m_dbproc, 23));
if (pData=dbdata(m_dbproc, 24))
    dbconvert(m_dbproc, SQLNUMERIC,
              (LPCBYTE)pData, dbdatlen(m_dbproc, 24), SQLFLT8, (BYTE *)&m_txn.Payment.c_credit_lim,
              8);
if (pData=dbdata(m_dbproc, 25))
    dbconvert(m_dbproc, SQLNUMERIC,
              (LPCBYTE)pData, dbdatlen(m_dbproc, 25), SQLFLT8, (BYTE *)&m_txn.Payment.c_discount,
              8);
if (pData=dbdata(m_dbproc, 26))
    dbconvert(m_dbproc, SQLNUMERIC,
              (LPCBYTE)pData, dbdatlen(m_dbproc, 26), SQLFLT8, (BYTE *)&m_txn.Payment.c_balance,
              8);
if (pData=dbdata(m_dbproc, 27))
    UtilStrCpy(m_txn.Payment.c_data, pData,
               dbdatlen(m_dbproc, 27));
DiscardNextRows(0);
DiscardNextResults(0);

if (m_txn.Payment.c_id == 0)
    throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
else
    m_txn.Payment.exec_status_code = eOK;

```

```

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
            (e->m_msgno == iErrOLEDbProvider &&
            strstr(e->m_msgetext, sErrTimeoutExpired) !=
NULL)) &&
longer period
        {
            // hit deadlock; backoff for increasingly
            delete e;
            Sleep(10 * iTryCount);
        }
        else
            throw;
    }
} // while (TRUE)

// if (iTryCount)
//     throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int i;
    DBDATETIME datetime;
    DBDATEREC daterec;

    int RETCODE rc;
    const BYTE *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_orderstatus", 0);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1, (BYTE
*) &m_txn.OrderStatus.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE
*) &m_txn.OrderStatus.d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE
*) &m_txn.OrderStatus.c_id);

            // if customer id is zero, then order status is by
name
            if (m_txn.OrderStatus.c_id == 0)
                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char *)m_txn.OrderStatus.c_last);

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
        }

```

```

        // Get order lines
        if (dbresults(m_dbproc) != SUCCEED)
        {
            if ((m_DbLibErr == NULL) && (m_SqlErr ==
NULL))
                throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO SUCH ORDER );
            else
                ThrowError(CDBLIBERR::eDbResults);
        }

        if (dbnumcols(m_dbproc) != 5)
            ThrowError(CDBLIBERR::eWrongNumCols);

        i = 0;
        while (TRUE)
        {
            rc = dbnextrow(m_dbproc);
            if (rc == NO_MORE_ROWS)
                break;
            if (rc != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if(pData=dbdata(m_dbproc, 1))

                m_txn.OrderStatus.OL[i].ol_supply_w_id = (*DBSMALLINT *) pData;
                if(pData=dbdata(m_dbproc, 2))
                    m_txn.OrderStatus.OL[i].ol_i_id =
(*DBINT *) pData;
                if(pData=dbdata(m_dbproc, 3))

                    m_txn.OrderStatus.OL[i].ol_quantity = (*DBSMALLINT *) pData;
                    if(pData=dbdata(m_dbproc, 4))
                        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8,
(BYTE *)&m_txn.OrderStatus.OL[i].ol_amount, 8);
                    if(pData=dbdata(m_dbproc, 5))
                    {
                        datetime = *((DBDATETIME *) pData);
                        dbdatecrack(m_dbproc, &daterec,
&datetime);

                        m_txn.OrderStatus.OL[i].ol_delivery_d.year = daterec.year;
                        m_txn.OrderStatus.OL[i].ol_delivery_d.month = daterec.month;
                        m_txn.OrderStatus.OL[i].ol_delivery_d.day = daterec.day;
                        m_txn.OrderStatus.OL[i].ol_delivery_d.hour = daterec.hour;
                        m_txn.OrderStatus.OL[i].ol_delivery_d.minute = daterec.minute;
                        m_txn.OrderStatus.OL[i].ol_delivery_d.second = daterec.second;
                        i++;
                    }
                m_txn.OrderStatus.o_ol_cnt = i;

            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
        }
    }
}

```

```

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc) != 8)
            ThrowError(CDBLIBERR::eWrongNumCols);

        if(pData=dbdata(m_dbproc, 1))
            m_txn.OrderStatus.c_id = (*DBINT *) pData;
        if(pData=dbdata(m_dbproc, 2))
            UtilStrCpy(m_txn.OrderStatus.c_last, pData,
dbdatlen(m_dbproc,2));
        if(pData=dbdata(m_dbproc, 3))
            UtilStrCpy(m_txn.OrderStatus.c_first, pData,
dbdatlen(m_dbproc,3));
        if(pData=dbdata(m_dbproc, 4))
            UtilStrCpy(m_txn.OrderStatus.c_middle,
pData, dbdatlen(m_dbproc, 4));
        if(pData=dbdata(m_dbproc, 5))
        {
            datetime = *((DBDATETIME *) pData);
            dbdatecrack(m_dbproc, &daterec, &datetime);
            m_txn.OrderStatus.o_entry_d.year =
daterec.year;
            m_txn.OrderStatus.o_entry_d.month =
daterec.month;
            m_txn.OrderStatus.o_entry_d.day =
daterec.day;
            m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;
            m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;
            m_txn.OrderStatus.o_entry_d.second =
daterec.second;
        }
        if(pData=dbdata(m_dbproc, 6))
            m_txn.OrderStatus.o_carrier_id =
(*DBSMALLINT *) pData;
        if(pData=dbdata(m_dbproc, 7))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,7),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.c_balance, 8);
        if(pData=dbdata(m_dbproc, 8))
            m_txn.OrderStatus.o_id = (*DBINT *) pData;

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (m_txn.OrderStatus.o.ol_cnt == 0)
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
        else if (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else
            m_txn.OrderStatus.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)

```

```

    {
        if ((e->m_msgno == 1205 ||
(e->m_msgno == iErrOleDbProvider &&
strstr(e->m_msgtext, sErrTimeoutExpired) !=
NULL)) &&
longer period
{
    // hit deadlock; backoff for increasingly
    delete e;
    Sleep(10 * iTryCount);
}
else
    throw;
}
// while (TRUE)
// if (iTryCount)
//     throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int
    int
    const BYTE
    *pData;
    i;
    iTryCount = 0;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_delivery", 0);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1, (BYTE
*)&m_txn.Delivery.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE
*)&m_txn.Delivery.o_carrier_id);

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc) != 10)
                ThrowError(CDBLIBERR::eWrongNumCols);

            for (i=0; i<10; i++)
            {
                if (pData = dbdata(m_dbproc, i+1))
                    m_txn.Delivery.o_id[i] = *((DBINT
*)pData);

            }
        }
        DiscardNextRows(0);
        DiscardNextResults(0);
    }
}

```

```

        m_txn.Delivery.exec_status_code = eOK;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
            (e->m_msgno == iErrOLEDbProvider &&
            strstr(e->m_msgrtext, sErrTimeoutExpired) !=
            NULL)) &&
            longer period
        {
            // hit deadlock; backoff for increasingly
            delete e;
            Sleep(10 * iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)

//     if (iTryCount)
//         throw new CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }
    return;
}

```

tpcc_dblib.h

```

/*      FILE:          TPCC_DBLIB.H
*           Microsoft TPC-C Kit Ver. 4.20.000
*           Copyright Microsoft, 1999
*
*           All Rights Reserved
*
*           Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
*
*           PURPOSE: Header file for TPC-C txn class implementation.
*
*           Change history:
*               4.20.000 - updated rev number to match kit
*/
#pragma once

#ifndef PDBPROCESS
#define DBPROCESS void // dbprocess structure type

```

```

typedef DBPROCESS * PDBPROCESS;
#endif

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class CSQLERR : public CBaseErr
{
public:
    CSQLERR(void)
    {
        m_msgno = 0;
        m_msgrstate = 0;
        m_severity = 0;
        m_msgrtext = NULL;
    }

    ~CSQLERR()
    {
        delete [] m_msgrtext;
    }

    int m_msgno;
    int m_msgrstate;
    int m_severity;
    char *m_msgrtext;

    int ErrorType() {return ERR_TYPE_SQL;};
    int ErrorNum() {return m_msgno;};
    char *ErrorText() {return m_msgrtext;};
};

class CDBLIBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eLogin, // error from
        dblogin eDbOpen, // error from dbopen
        dbuse eDbUse, // error from
        dbsqlexec eDbSqlExec, // error from
        one of the dbset* routines eDbSet, // error from
        dbnextrow eDbNextRow, // error from
        returned than expected eWrongRowCount, // more or less rows
        returned than expected eWrongNumCols, // more or less columns
        dbresults eDbResults, // error from
        dbrpcexec eDbRpcExec, // error from
    };
}

```

```

        eDbSetMaxProcs,           // error from
dbsetMaxprocs
        eDbProcHandler           // error from either
dbprocerrhandle or dbprocmsgshandle
};

CDBLIBERR(ACTION eAction, int severity = 0, int dberror = 0, int
oserr = 0)
{
    m_eAction = eAction;
    m_severity = severity;
    m_dberror = dberror;
    m_oserr = oserr;

    m_dberrstr = NULL;
    m_oserrstr = NULL;
};

~CDBLIBERR()
{
    delete [] m_dberrstr;
    delete [] m_oserrstr;
};

ACTION    m_eAction;
int         m_severity;
int         m_dberror;
int         m_oserr;
char      *m_dberrstr;
char      *m_oserrstr;

int ErrorType() {return ERR_TYPE_DBLIB;};
int ErrorNum() {return m_dberror;};
char *ErrorText() {return m_dberrstr;};

};

class CTPCC_DBLIB_ERR : public CBaseErr
{
public:
    enum CTPCC_DBLIB_ERRS
    {
        ERR_WRONG_SP_VERSION = 1,      // "Wrong version of
stored procs on database server"
        ERR_INVALID_CUST,             // "Invalid
Customer id.name."
        ERR_NO_SUCH_ORDER,            // "No orders
found for customer."
        ERR_RETRYED_TRANS,            // "Retries
before transaction succeeded."
    };

    CTPCC_DBLIB_ERR( int iErr ) { m_errno = iErr; m_iTryCount = 0;
};

    CTPCC_DBLIB_ERR( int iErr, int iTryCount ) { m_errno = iErr;
m_iTryCount = iTryCount; };

    int          m_errno;
    int          m_iTryCount;

    int ErrorType() {return ERR_TYPE_TPCC_DBLIB;};
    int ErrorNum() {return m_errno;};

```

```

        char *ErrorText();
};

class DllDecl CTPCC_DBLIB : public CTPCC_BASE
{
private:
    // declare variables and private functions here...
    PDBPROCESS          m_dbproc;
    CDBLIBERR *m_DbLibErr;           // not allocated until
needed (maybe never)
    CSQLERR             *m_SqlErr;           // not allocated until needed (maybe never)
    int                 m_MaxRetries;        // retry count on deadlock

    void DiscardNextRows(int iExpectedCount);
    void DiscardNextResults(int iExpectedCount);
    void ThrowError( CDBLIBERR::ACTION eAction );
    void ResetError();

    union
    {
        NEW_ORDER_DATA           NewOrder;
        PAYMENT_DATA              Payment;
        DELIVERY_DATA              Delivery;
        STOCK_LEVEL_DATA           StockLevel;
        ORDER_STATUS_DATA           OrderStatus;
    } m_txn;

public:
    CTPCC_DBLIB(LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword,
LPCSTR szHost, LPCSTR szDatabase );
    ~CTPCC_DBLIB(void);

    inline PNEW_ORDER_DATA           BuffAddr_NewOrder()
    { return &m_txn.NewOrder; };
    inline PPAYMENT_DATA             BuffAddr_Payment()
    { return &m_txn.Payment; };
    inline PDELIVERY_DATA             BuffAddr_Delivery()
    { return &m_txn.Delivery; };
    inline PSOCK_LEVEL_DATA           BuffAddr_StockLevel()
    { return &m_txn.StockLevel; };
    inline PORDER_STATUS_DATA         BuffAddr_OrderStatus()
    { return &m_txn.OrderStatus; };

    void NewOrder                   ();
    void Payment                    ();
    void Delivery                  ();
    void StockLevel                ();
    void OrderStatus               ();

    // these are public because they must be called from the dblib
err_handler and msg_handler
    // outside of the class
    void SetDbLibError(int severity, int dberr, int oserr, LPCSTR
dberrstr, LPCSTR oserrstr);
    void SetSqlError( int msgno, int msgstate, int severity, LPCSTR
msgtext );
};


```

```

extern "C" DllDecl CTPCC_DBLIB* CTPCC_DBLIB_new
    ( LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost, LPCSTR
szDatabase );
typedef CTPCC_DBLIB* (TYPE_CTPCC_DBLIB)(LPCSTR, LPCSTR, LPCSTR, LPCSTR, LPCSTR);

```

tpcc_odbc.cpp

```

/*      FILE:          TPCC_ODBC.CPP
 *
 *      Microsoft TPC-C Kit Ver. 4.20.000
 *
 *      All Rights Reserved
 *
 *      Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
*
*      PURPOSE: Implements ODBC calls for TPC-C txns.
*      Contact: Charles Levine (clevine@microsoft.com)
*
*      Change history:
*          4.20.000 - updated rev number to match kit
*          4.10.001 - not deleting error class in catch handler on deadlock
retry;
*                      not a functional bug, but a memory leak
*/
#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "...\\common\\src\\error.h"
#include "...\\common\\src\\trans.h"
#include "...\\common\\src\\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from tpcc_version stored proc
const char sVersion[] = "4.10.000";

const iMaxRetries = 10;           // how many retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";           // ODBC

static SQLHENV henv = SQL_NULL_HENV;                           // ODBC
environment handle

BOOL APIENTRY DLLMain(HMODULE hModule, DWORD ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )

```

```

    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if ( SQLAllocHandleStd(SQL_HANDLE_ENV,
SQL_NULL_HANDLE, &henv) != SQL_SUCCESS )
                return FALSE;
            break;

        case DLL_PROCESS_DETACH:
            if ( henv != NULL )
                SQLFreeEnv(henv);
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
*/
char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION, "Wrong version of stored
procs on database server" },
        { ERR_INVALID_CUST, "Invalid Customer
id.name." },
        { ERR_NO SUCH ORDER, "No orders found for
customer." },
        { ERR_RETRYED_TRANS, "Retries before
transaction succeeded." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error number./";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( _errno == errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
    LPCSTR szServer,           // name of SQL server
    LPCSTR szUser,             // user name for login
    LPCSTR szPassword,         // password for login
    LPCSTR szHost,             // not used
    LPCSTR szDatabase )        // name of database to use
{

```

```

        return new CTPCC_ODBC( szServer, szUser, szPassword, szHost, szDatabase );
    }

CTPCC_ODBC::CTPCC_ODBC (
    LPCSTR szServer,                                // name of SQL server
    LPCSTR szUser,                                   // user name
for login
    LPCSTR szPassword,                            // password for login
    LPCSTR szHost,                                // not used
    LPCSTR szDatabase                            // name of database to
use
)
{
    RETCODE          rc;

    // initialization
    m_hdbc = SQL_NULL_HDBC;
    m_hstmt = SQL_NULL_HSTMT;

    m_hstmtNewOrder = SQL_NULL_HSTMT;
    m_hstmtPayment = SQL_NULL_HSTMT;
    m_hstmtDelivery = SQL_NULL_HSTMT;
    m_hstmtOrderStatus = SQL_NULL_HSTMT;
    m_hstmtStockLevel = SQL_NULL_HSTMT;

    m_descNewOrderCols1 = SQL_NULL_HDESC;
    m_descNewOrderCols2 = SQL_NULL_HDESC;
    m_descOrderStatusCols1 = SQL_NULL_HDESC;
    m_descOrderStatusCols2 = SQL_NULL_HDESC;

    if ( SQLAllocHandle(SQL_HANDLE_DBC, henv, &m_hdbc) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    if ( SQLSetConnectOption(m_hdbc, SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )
        ThrowError(CODBCERR::eConnOption);

    {
        char                  szConnectStr[256];
        char                  szOutStr[1024];
        SQLSMALLINT           iOutStrLen;

        sprintf( szConnectStr, "DRIVER=SQL
Server:SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
                 szServer, szUser, szPassword, szDatabase );

        rc = SQLDriverConnect(m_hdbc, NULL, (SQLCHAR*)szConnectStr,
sizeof(szConnectStr),
                           (SQLCHAR*)szOutStr, sizeof(szOutStr), &iOutStrLen,
                           SQL_DRIVER_NOPROMPT );

        if (rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eConnect);
    }

    if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmt) != SQL_SUCCESS)
        ThrowError(CODBCERR::eAllocHandle);

    {
        char          buffer[128];
        // set some options affecting connection behavior
    }
}

```

```

strcpy(buffer, "set nocount on set XACT_ABORT ON");
rc = SQLExecDirect(m_hstmt, (unsigned char *)buffer, SQL_NTS);
if (rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO)
    ThrowError(CODBCERR::eExecDirect);

// verify that version of stored procs on server is correct
char db_sp_version[10];
strcpy(buffer, "{call tpcc_version}");
rc = SQLExecDirect(m_hstmt, (unsigned char *)buffer, SQL_NTS);
if (rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO)
    ThrowError(CODBCERR::eExecDirect);
if (SQLBindCol(m_hstmt, 1, SQL_C_CHAR, &db_sp_version,
sizeof(db_sp_version), NULL) != SQL_SUCCESS)
    ThrowError(CODBCERR::eBindCol);
if (SQLFetch(m_hstmt) == SQL_ERROR)
    ThrowError(CODBCERR::eFetch);
if (strcmp(db_sp_version,sVersion))
    throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION );

SQLFreeHandle(SQL_HANDLE_STMT, m_hstmt);

// Bind parameters for each of the transactions
InitNewOrderParams();
InitPaymentParams();
InitOrderStatusParams();
InitDeliveryParams();
InitStockLevelParams();
}

CTPCC_ODBC::~CTPCC_ODBC( void )
{
    // note: descriptors are automatically released when the connection is
dropped
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtNewOrder);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtPayment);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtDelivery);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtOrderStatus);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtStockLevel);

    SQLDisconnect(m_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);
}

void CTPCC_ODBC::ThrowError( CODBCERR::ACTION eAction )
{
    RETCODE          rc;
    SDWORD           lNativeError;
    char             szState[6];
    char             szMsg[SQL_MAX_MESSAGE_LENGTH];
    char             szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    CODBCERR     *pODBCErr;
                           // not allocated until
needed (maybe never)

    pODBCErr = new CODBCERR();

    pODBCErr->m_NativeError = 0;
    pODBCErr->m_eAction = eAction;
    pODBCErr->m_bDeadLock = FALSE;

    szTmp[0] = 0;
    while (TRUE)

```

```

{
    rc = SQLBindCol(m_hstmt, 1, SQL_C_SLONG, &m_txn.StockLevel.low_stock, 0,
&NativeError,
                    (BYTE *)&szState,
NULL);
    if (rc == SQL_NO_DATA)
        bBreak;

    // check for deadlock
    if (lNativeError == 1205 || (lNativeError == iErrOleDbProvider
&&
        strstr(szMsg, sErrTimeoutExpired) != NULL))
        pODBCErr->m_bDeadlock = TRUE;

    // capture the (first) database error
    if (pODBCErr->m_NativeError == 0 && lNativeError != 0)
        pODBCErr->m_NativeError = lNativeError;

    // quit if there isn't enough room to concatenate error text
    if ( (strlen(szMsg) + 2) > (sizeof(szTmp) - strlen(szTmp)) )
        break;

    // include line break after first error msg
    if (szTmp[0] != 0)
        strcat( szTmp, "\n");
    strcat( szTmp, szMsg );
}

if (pODBCErr->m_odbcerrstr != NULL)
{
    delete [] pODBCErr->m_odbcerrstr;
    pODBCErr->m_odbcerrstr = NULL;
}

if (strlen(szTmp) > 0)
{
    pODBCErr->m_odbcerrstr = new char[ strlen(szTmp)+1 ];
    strcpy( pODBCErr->m_odbcerrstr, szTmp );
}

SQLFreeStmt(m_hstmt, SQL_CLOSE);
throw pODBCErr;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSINT,
SQL_SMALLINT, 0, 0, &m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSINT,
SQL_SMALLINT, 0, 0, &m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);
}

```

```

        if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG, &m_txn.StockLevel.low_stock, 0,
NULL) != SQL_SUCCESS )
            ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE rc;
    int iTryCount = 0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_stocklevel(?, ?, ?)", SQL_NTS);
            if (rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);

            m_txn.StockLevel.exec_status_code = eOK;
            break;
        }
        catch (CODBCERR *e)
        {
            if ((!e->m_bDeadLock) || (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock; backoff for increasingly longer
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmtNewOrder) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc, &m_descNewOrderCols1)
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc, &m_descNewOrderCols2)
    )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);
}

```

```

int i = 0;
if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSHT,
SQL_SMALLINT, 0, 0, &m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_INTEGER, 0, 0, &m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.NewOrder.o.ol_cnt, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.NewOrder.o.all_local, 0, NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);

for (int j=0; j<MAX_OI_NEW_ORDER_ITEMS; j++)
{
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0, &m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSHT, SQL_SMALLINT, 0, 0, &m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSHT, SQL_SMALLINT, 0, 0, &m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    // set the bind offset pointer
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_BindOffset, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_i_name, sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SSHT, &m_txn.NewOrder.OL[0].ol_stock, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic, sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    // associate the column bindings for the second result set
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS

```

```

    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR, &m_txn.NewOrder.c_last, sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR, &m_txn.NewOrder.c_credit, sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

void CTPCC_ODBC::NewOrder()
{
    int i;
    RETCODE rc;
    int iTryCount = 0;

    // 0          1          2
    // 012345678901234567890123456789
    wchar_t szSqlTemplate[] = L"{call
tpcc_neworder(?,?,?,?,?,?)}";
    L"?,:,:,:,:,:,:,:,:,:,:,:,:,:,:";
    L"?,:,:,:,:,:,:,:,:,:,:,:,:,:,:";
    L"?,:,:,:,:,:,:,:,:,:,:,:,:,:,:";
    m_hstmt = m_hstmtNewOrder;

    // associate the parameter and column bindings for this transaction
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    // clip statement buffer based on number of parameters
    // fixed part is 29 chars and variable part is 6 chars per line item
    i = 29 + m_txn.NewOrder.o.ol_cnt*6;
    wcsncpy( &szSqlTemplate[i], L"\")" );
    // check whether any order lines are for a remote warehouse
    m_txn.NewOrder.o.all_local = 1;
    for (i = 0; i < m_txn.NewOrder.o.ol_cnt; i++)
    {
        if (m_txn.NewOrder.OL[i].ol_supply_w_id != m_txn.NewOrder.w_id)
        {
            m_txn.NewOrder.o.all_local = 0; // at least one
            break;
        }
    }
    while (TRUE)
    {
        try
        {
            m_BindOffset = 0;
            rc = SQLExecDirectW(m_hstmt, (SQLWCHAR*)szSqlTemplate,
SQL_NTS);

```

```

        if ( rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eExecDirect);

        // Get order line results
        m_txn.NewOrder.total_amount = 0;
        for ( i = 0; i<m_txn.NewOrder.o.ol_cnt; i++)
        {
            // set the bind offset value...
            m_BindOffset = i *

        sizeof(m_txn.NewOrder.OL[0]));

        if ( SQLFetch(m_hstmt) == SQL_ERROR)
            ThrowError(CODBCERR::eFetch);

            // move to the next resultset
            if ( SQLMoreResults(m_hstmt) == SQL_ERROR )

                ThrowError(CODBCERR::eMoreResults);

            m_txn.NewOrder.OL[i].ol_amount =
        }

            // associate the column bindings for the second result
        set
            if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

            if ( SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);

            if ( m_no_commit_flag == 1)
            {
                m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 - m_txn.NewOrder.c_discount));
                m_txn.NewOrder.exec_status_code = eOK;
            }
            else
                m_txn.NewOrder.exec_status_code =
eInvalidItem;

            break;
        }
        catch ( CODBCERR *e)
        {
            if ( (!e->m_bDeadLock) || (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock; backoff for increasingly longer
            period
                delete e;
                Sleep(10 * iTryCount);
            }
        }

        if ( iTryCount)
        //           throw new CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
    }
}

```

```

void CTPCC_ODBC::InitPaymentParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmtPayment) !=
SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtPayment;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSHORT,
SQL_SMALLINT, 0, 0, &m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSHORT,
SQL_SMALLINT, 0, 0, &m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_DOUBLE,
SQL_NUMERIC, 6, 2, &m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SLONG,
SQL_INTEGER, 0, 0, &m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_CHAR,
SQL_CHAR, sizeof(m_txn.Payment.c_last), 0, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_SLONG, &m_txn.Payment.c_id,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
&m_txn.Payment.h_date, 0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_street_1, sizeof(m_txn.Payment.w_street_1), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_street_2, sizeof(m_txn.Payment.w_street_2), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_city, sizeof(m_txn.Payment.w_city), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_state, sizeof(m_txn.Payment.w_state), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_zip, sizeof(m_txn.Payment.w_zip), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_street_1, sizeof(m_txn.Payment.d_street_1), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_street_2, sizeof(m_txn.Payment.d_street_2), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_city, sizeof(m_txn.Payment.d_city), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_state, sizeof(m_txn.Payment.d_state), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_zip, sizeof(m_txn.Payment.d_zip), NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);
}

```

```

        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_first,           sizeof(m_txn.Payment.c_first), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_middle,         sizeof(m_txn.Payment.c_middle), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_street_1,       sizeof(m_txn.Payment.c_street_1), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_street_2,       sizeof(m_txn.Payment.c_street_2), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_city,          sizeof(m_txn.Payment.c_city), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_state,          sizeof(m_txn.Payment.c_state), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_zip,            sizeof(m_txn.Payment.c_zip), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_phone,          sizeof(m_txn.Payment.c_phone), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
&m_txn.Payment.c_since,          0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_credit,         sizeof(m_txn.Payment.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_credit_lim,     0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_discount,       0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_balance,        0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_data,           sizeof(m_txn.Payment.c_data), NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount = 0;

    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_payment(?,?,?,?,?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);

            if (m_txn.Payment.c_id == 0)

```

```

                throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_INVALID_CUST );
                else
                    break;
            }
            catch (CODBCERR *e)
            {
                if ((!e->m_bDeadLock) || (++iTryCount > iMaxRetries))
                    throw;

                // hit deadlock; backoff for increasingly longer
                period
                delete e;
                Sleep(10 * iTryCount);
            }

            if (iTryCount)
            //
            throw new CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
        }

        void CTPCC_ODBC::InitOrderStatusParams()
        {
            if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
                || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
                || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
            )
                ThrowError(CODBCERR::eAllocHandle);

            m_hstmt = m_hstmtOrderStatus;

            if (SQLSetStmtAttrW(m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER) != SQL_SUCCESS)
                ThrowError(CODBCERR::eSetStmtAttr);

            int i = 0;
            if (SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSHORT,
SQL_SMALLINT, 0, 0, &m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SLONG,
SQL_INTEGER, 0, 0, &m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_CHAR,
SQL_CHAR, sizeof(m_txn.OrderStatus.c_last), 0, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);

            // configure block cursor
            if (SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.Ol[0]), 0) != SQL_SUCCESS
                || SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROWS_FETCHED_PTR,
&m_RowsFetched, 0) != SQL_SUCCESS
            )
                ThrowError(CODBCERR::eSetStmtAttr);

            i = 0;

```

```

        if ( SQLBindCol(m_hstmt, ++i, SQL_C_SSHT, 
&m_txm.OrderStatus.OL[0].ol_supply_w_id, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SSHT,
&m_txm.OrderStatus.OL[0].ol_i_id, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SSHT,
&m_txm.OrderStatus.OL[0].ol_quantity, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txm.OrderStatus.OL[0].ol_amount, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
&m_txm.OrderStatus.OL[0].ol_delivery_d, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_SSHT, &m_txm.OrderStatus.c_id, 0,
NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SSHT,
&m_txm.OrderStatus.c_last, sizeof(m_txm.OrderStatus.c_last), NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SSHT,
&m_txm.OrderStatus.c_first, sizeof(m_txm.OrderStatus.c_first), NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SSHT,
&m_txm.OrderStatus.c_middle, sizeof(m_txm.OrderStatus.c_middle), NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
&m_txm.OrderStatus.o_entry_d, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SSHT,
&m_txm.OrderStatus.o_carrier_id, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txm.OrderStatus.c_balance, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SSHT,
&m_txm.OrderStatus.o_id, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);
    }

void CTPCC_ODBC::OrderStatus()
{
    int                                     iTryCount = 0;
    RETCODE                                rc;

    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    if ( m_txm.OrderStatus.c_id != 0 )
        m_txm.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            // configure block cursor
            if ( SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

```

```

            rc = SQLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_orderstatus(?, ?, ?, ?)", SQL_NTS);
            if ( ((rc == SQL_SUCCESS_WITH_INFO) && (m_RowsFetched
!= 0)) || (rc == SQL_ERROR) )
                ThrowError(CODBCERR::eExecDirect);

            // configure block cursor
            if ( SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OI_ORDER_STATUS_ITEMS, 0) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

            rc = SQLFetchScroll( m_hstmt, SQL_FETCH_NEXT, 0 );
            if ( ((rc == SQL_SUCCESS_WITH_INFO) && (m_RowsFetched
!= 0)) || (rc == SQL_ERROR) )
                ThrowError(CODBCERR::eFetchScroll);

            m_txm.OrderStatus.o_ol_cnt = (short)m_RowsFetched;

            if ( m_txm.OrderStatus.o_ol_cnt != 0 )
            {
                if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

                if ( SQLMoreResults(m_hstmt) == SQL_ERROR )
                    ThrowError(CODBCERR::eMoreResults);

                if ( (rc = SQLFetch(m_hstmt)) == SQL_ERROR )
                    ThrowError(CODBCERR::eFetch);
            }

            SQLFree Stmt(m_hstmt, SQL_CLOSE);

            if ( m_txm.OrderStatus.o_ol_cnt == 0 )
                throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
            else if ( m_txm.OrderStatus.c_id == 0 &&
m_txm.OrderStatus.c_last[0] == 0 )
                throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txm.OrderStatus.exec_status_code = eOK;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!e->m_bDeadLock) || (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock; backoff for increasingly longer
            period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
    // throw new CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
    iTryCount);
}

```

```

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtDelivery;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSHORT,
SQL_SMALLINT, 0, 0, &m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT, SQL_C_SSHORT,
SQL_SMALLINT, 0, 0, &m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    for (i=0;i<10;i++)
    {
        if ( SQLBindCol(m_hstmt, (UWORD)(i+1), SQL_C_SLONG,
&m_txn.Delivery.o_id[i], 0, NULL) != SQL_SUCCESS )
            ThrowError(CODBCERR::eBindCol);
    }
}

void CTPCC_ODBC::Delivery()
{
    RETCODE          rc;
    int              iTryCount = 0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_delivery(?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);
            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
        catch (CODBCERR *e)
        {
            if ((!e->m_bDeadLock) || (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock; backoff for increasingly longer
period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
        throw new CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

```

}

tpcc_odbc.h

```

/*
 * FILE:           TPCC_ODBC.H
 *                 Microsoft TPC-C Kit Ver. 4.20.000
 *                 Copyright Microsoft, 1999
 *
 * All Rights Reserved
 *
 * Version 4.10.000 audited by Richard Gimarc,
 * Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C txn class implementation.
 *
 * Change history:
 *   4.20.000 - updated rev number to match kit
 */
#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,                                // error from
SQLAllocConnect
        eAllocHandle,                               // error from
SQLAllocHandle
        eConnOption,                               // error from
SQLSetConnectOption
        eConnect,                                 // error from SQLConnect
        eAllocStmt,                               // error from
SQLAllocStmt
        eExecDirect,                               // error from
SQLExecDirect
        eBindParam,                               // error from
SQLBindParameter
        eBindCol,                                 // error from SQLBindCol
        eFetch,                                   // error from
SQLFetch
        eFetchScroll,                            // error from
SQLFetchScroll
        eMoreResults,                            // error from
SQLMoreResults
        ePrepare,                                // error from SQLPrepare
        eExecute,                                // error from SQLExecute
        eSetEnvAttr,                            // error from
SQLSetEnvAttr
        eSetStmtAttr,                            // error from
SQLSetStmtAttr
    };
};

CODBCERR(void)
{

```

```

        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_odbcerrstr = NULL;
    };

~CDBCERR()
{
    if (m_odbcerrstr != NULL)
        delete [] m_odbcerrstr;
};

ACTION m_eAction;
int     m_NativeError;
BOOL   m_bDeadLock;
char   *m_odbcerrstr;

int ErrorType() {return ERR_TYPE_ODBC;};
int ErrorNum() {return m_NativeError;};
char *ErrorText() {return m_odbcerrstr;};

};

class CTPCC_ODBC_ERR : public CBaseErr
{
public:
    enum TPCC_ODBC_ERRS
    {
        ERR_WRONG_SP_VERSION = 1,      // "Wrong version of
stored procs on database server"
        ERR_INVALID_CUST,             // "Invalid
Customer id,name."
        ERR_NO_SUCH_ORDER,            // "No orders
found for customer."
        ERR_RETRYED_TRANS,            // "Retries
before transaction succeeded."
    };

    CTPCC_ODBC_ERR( int iErr ) { m_errno = iErr; m_iTryCount = 0; };

    CTPCC_ODBC_ERR( int iErr, int iTryCount ) { m_errno = iErr;
m_iTryCount = iTryCount; };

    int         m_errno;
    int         m_iTryCount;

    int ErrorType() {return ERR_TYPE_TPCC_ODBC;};
    int ErrorNum() {return m_errno;};

    char *ErrorText();
};

class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
private:
    // declare variables and private functions here...
    BOOL       m_bDeadlock;           // transaction
was selected as deadlock victim
    int        m_MaxRetries;          // retry count on deadlock
    SQLHENV    m_henv;                // ODBC environment handle
};

```

```

SQLHDBC      m_hdbc;
SQLHSTMT    m_hstmt;           // the current hstmt

SQLHSTMT    m_hstmtNewOrder;
SQLHSTMT    m_hstmtPayment;
SQLHSTMT    m_hstmtDelivery;
SQLHSTMT    m_hstmtOrderStatus;
SQLHSTMT    m_hstmtStockLevel;

SQLHDESC    m_descNewOrderCols1;
SQLHDESC    m_descNewOrderCols2;
SQLHDESC    m_descOrderStatusCols1;
SQLHDESC    m_descOrderStatusCols2;

// new-order specific fields
SQLUINTeger m_BindOffset;
SQLUINTeger m_RowsFetched;
int          m_no_commit_flag;

void ThrowError( CDBCERR::ACTION eAction );

void InitNewOrderParams();
void InitPaymentParams();
void InitDeliveryParams();
void InitStockLevelParams();
void InitOrderStatusParams();

union
{
    NEW_ORDER_DATA      NewOrder;
    PAYMENT_DATA        Payment;
    DELIVERY_DATA       Delivery;
    STOCK_LEVEL_DATA   StockLevel;
    ORDER_STATUS_DATA  OrderStatus;
    m_txn;
};

public:
    CTPCC_ODBC(LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword,
LPCSTR szHost, LPCSTR szDatabase);
    ~CTPCC_ODBC(void);

    inline PNEW_ORDER_DATA      BuffAddr_NewOrder()
    { return &m_txn.NewOrder; };
    inline PPAYMENT_DATA        BuffAddr_Payment()
    { return &m_txn.Payment; };
    inline PDELIVERY_DATA       BuffAddr_Delivery()
    { return &m_txn.Delivery; };
    inline PSOCK_LEVEL_DATA    BuffAddr_StockLevel()
    { return &m_txn.StockLevel; };
    inline PORDER_STATUS_DATA  BuffAddr_OrderStatus()
    { return &m_txn.OrderStatus; };

    void NewOrder                ();
    void Payment                 ();
    void Delivery                ();
    void StockLevel              ();
    void OrderStatus              ();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new

```

```
    ( LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost, LPCSTR
szDatabase );
```

```
typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR, LPCSTR, LPCSTR, LPCSTR);
```

trans.h

```
/* FILE:           TRANS.H
 *
 * Microsoft TPC-C Kit Ver. 4.20.000
 * Copyright Microsoft, 1999
 *
 * All Rights Reserved
 *
 * Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C structure templates.
 *
 * Change history:
 *      4.20.000 - updated rev number to match kit
 */
#pragma once

// String length constants
#define SERVER_NAME_LEN          20
#define DATABASE_NAME_LEN        20
#define USER_NAME_LEN            20
#define PASSWORD_LEN             20
#define TABLE_NAME_LEN           20
#define I_DATA_LEN                50
#define I_NAME_LEN                 24
#define BRAND_LEN                  1
#define LAST_NAME_LEN              16
#define W_NAME_LEN                  10
#define ADDRESS_LEN                 20
#define STATE_LEN                   2
#define ZIP_LEN                      9
#define S_DIST_LEN                  24
#define S_DATA_LEN                  50
#define D_NAME_LEN                  10
#define FIRST_NAME_LEN               16
#define MIDDLE_NAME_LEN                2
#define PHONE_LEN                     16
#define DATETIME_LEN                  30
#define CREDIT_LEN                     2
#define C_DATA_LEN                    250
#define H_DATA_LEN                     24
#define DIST_INFO_LEN                  24
#define MAX_DL_NEW_ORDER_ITEMS       15
#define MAX_DL_ORDER_STATUS_ITEMS     15
#define STATUS_LEN                      25
#define OL_DIST_INFO_LEN                24

// TIMESTAMP_STRUCT is provided by the ODBC header file sqatypes.h, but is not
available
// when compiling with dblib, so redefined here. Note: we are using the symbol
"__SQLTYPES"
// (declared in sqatypes.h) as a way to determine if TIMESTAMP_STRUCT has been
declared.
#ifndef __SQLTYPES
    typedef struct
    {
```

```
    short                         /* SQLSMALLINT */
year;                           /* SQLSMALLINT */
    unsigned short                /* SQLUSMALLINT */ month;
    unsigned short                /* SQLUSMALLINT */ day;
    unsigned short                /* SQLUSMALLINT */ hour;
    unsigned short                /* SQLUSMALLINT */ minute;
    unsigned short                /* SQLUSMALLINT */ second;
    unsigned long                 /* SQLINTEGER */ fraction;
} TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after transaction completes
enum EXEC_STATUS
{
    eOK,                          // 0      "Transaction committed."
    eInvalidItem,                // 1      "Item number is not valid."
    eDeliveryFailed               // 2      "Delivery Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    short                         ol_supply_w_id;
    long                           ol_i_id;
    short                         ol_quantity;

    // output params
    char                           ol_i_name[I_NAME_LEN+1];
    char                           ol_brand_generic[BRAND_LEN+1];
    double                        ol_i_price;
    double                        ol_amount;
    short                         ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    short                         w_id;
    short                         d_id;
    long                          c_id;
    short                         o.ol_cnt;

    // output params
    EXEC_STATUS                   exec_status_code;
    char                           c_last[LAST_NAME_LEN+1];
    char                           c_credit[CREDIT_LEN+1];
    double                        c_discount;
    double                        w_tax;
    double                        d_tax;
    long                           o_id;
    short                         o_commit_flag;
    TIMESTAMP_STRUCT              o_entry_d;
    short                         o_all_local;
    double                        total_amount;
    OL_NEW_ORDER_DATA            OL[MAX_DL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    short                         w_id;
    short                         d_id;
    long                          c_id;
```

```

short          c_d_id;
short          c_w_id;
double         h_amount;
char           c_last[LAST_NAME_LEN+1];

// output params
EXEC_STATUS   exec_status_code;

TIMESTAMP_STRUCT h_date;
char           w_street_1[ADDRESS_LEN+1];
char           w_street_2[ADDRESS_LEN+1];
char           w_city[ADDRESS_LEN+1];
char           w_state[STATE_LEN+1];
char           w_zip[ZIP_LEN+1];
char           d_street_1[ADDRESS_LEN+1];
char           d_street_2[ADDRESS_LEN+1];
char           d_city[ADDRESS_LEN+1];
char           d_state[STATE_LEN+1];
char           d_zip[ZIP_LEN+1];
char           c_first[FIRST_NAME_LEN+1];
char           c_middle[MIDDLE_NAME_LEN + 1];
char           c_street_1[ADDRESS_LEN+1];
char           c_street_2[ADDRESS_LEN+1];
char           c_city[ADDRESS_LEN+1];
char           c_state[STATE_LEN+1];
char           c_zip[ZIP_LEN+1];
char           c_phone[PHONE_LEN+1];

TIMESTAMP_STRUCT c_since;
char           c_credit[CREDIT_LEN+1];
char           c_credit_lim;
char           c_discount;
char           c_balance;
char           c_data[200+1];

} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long          ol_i_id;
    short          ol_supply_w_id;
    short          ol_quantity;
    double         ol_amount;

} OL_ORDER_STATUS_DATA; ol_delivery_d;

typedef struct
{
    // input params
    short          w_id;
    short          d_id;
    long           c_id;
    char           c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS   exec_status_code;
    char           c_first[FIRST_NAME_LEN+1];
    char           c_middle[MIDDLE_NAME_LEN+1];
    char           c_balance;
    long           o_id;
    TIMESTAMP_STRUCT o_entry_d;
    short          o_carrier_id;
    OL_ORDER_STATUS_DATA OL[MAX_OL_ORDER_STATUS_ITEMS];
    short          o.ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

```

```

typedef struct
{
    // input params
    short          w_id;
    short          o_carrier_id;

    // output params
    EXEC_STATUS   exec_status_code;
    SYSTEMTIME    queue_time;
    long           o_id[10];           // id's of
delivered orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery transactions and for writing them to
the delivery server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME    queue;           //time delivery
transaction queued
    short          w_id;           //delivery warehouse
    short          o_carrier_id;   //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    short          w_id;
    short          d_id;
    short          threshold;

    // output params
    EXEC_STATUS   exec_status_code;
    long           low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

txnlog.h

```

/*
 *      FILE:          TXNLOG.H
 *      Microsoft TPC-C Kit Ver. 4.10.000
 *      not yet audited
 *
 *      PURPOSE: Header file for txn log class
 *              Copyright Microsoft, 1999
 *              All Rights Reserved
 *
 */

#pragma once

typedef struct _TXN_NEWORDER
{
    BYTE          OL_Count;        //range 0 to 31
    BYTE          OL_Remote_Count; //range 0 to 31
    WORD          c_id;
    int           o_id;
} TXN_NEWORDER;

typedef struct _TXN_PAYMENT
{
    BYTE          CustByName;

```

```

        BYTE      IsRemote;
    } TXN_PAYMENT;

typedef struct _TXN_ORDERSTATUS
{
    BYTE      CustByName;
} TXN_ORDERSTATUS;

typedef union _TXN_DETAILS
{
    TXN_NEWORDER      NewOrder;
    TXN_PAYMENT       Payment;
    TXN_ORDERSTATUS   OrderStatus;
} TXN_DETAILS;

// Common header for all records in txn log. The TxnType field is
// a switch which identifies the particular variant.
#define TXN_REC_TYPE_CONTROL      1      // 
#define TXN_REC_TYPE_TPCC         2      // replaces
TRANSACTION_TYPE_TPCC
#define TXN_REC_TYPE_TPCC_DELIV_DEF 3

typedef struct _TXN_RECORD_HEADER
{
    JULIAN_TIME      TxnStartT0;           // start of
txn
    BYTE             TxnType;              // one of TXN_REC_TYPE_*
TxnType
    BYTE             TxnSubType;            // depends on
} TXN_RECORD_HEADER, *PTXN_RECORD_HEADER;

typedef struct _TXN_RECORD_CONTROL
{
    // common header; must exactly match TXN_RECORD_HEADER
    JULIAN_TIME      TxnStartT0;           // start of
txn
    BYTE             TxnType;              // =
TXN_REC_TYPE_CONTROL
    BYTE             TxnSubType;            // depends on
TxnType
    // end of common header

    DWORD            Len;                  // number of
bytes after this field
} TXN_RECORD_CONTROL, *PTXN_RECORD_CONTROL;

// TPC-C Txn Record Layout:
// 
// 'TxnStartT0' is a Julian timestamp corresponding to the moment the
// txn is sent to the SUT, i.e., beginning of response time. Deltas
// are in milliseconds. Note that if RTDelay > 0, then the txn was
// delayed by this amount. The delay occurs at the beginning of the
// response time. So if RTDelay > 0, then the txn was actually sent
// at TxnStartT0 + RTDelay.
// 
// Graphically:
// 
// time -->
// 
// |--- Menu ---|--- Keying --|--- Response --|--- Think --

```

```

//      <- DeltaT1 -> <- DeltaT2 -> <- DeltaT4 -> <- DeltaT3 ->
//          ^                                         ^
//          ^ TxnStartT0
//
//RTDelay is the amount of response time delay included in DeltaT4.
//RTDelay is recorded per txn because this value can be changed on
//the fly, and so may vary from txn to txn.
//
//TxnStatus is the txn completion code. It is used to indicate errors.
//For example, in the New Order txn, 1% of txns abort. TxnStatus will
//reflect this.

typedef struct _TXN_RECORD_TPCC
{
    // common header; must exactly match TXN_RECORD_HEADER
    JULIAN_TIME      TxnStartT0;           // start of
txn
    BYTE             TxnType;              // = TXN_REC_TYPE_TPCC
TxnType
    BYTE             TxnSubType;            // depends on
    // end of common header

    int              DeltaT1;              // menu time (ms)
    int              DeltaT2;              // keying time (ms)
    int              DeltaT3;              // think time (ms)
    int              DeltaT4;              // response time (ms)
    int              RTDelay;              // response time delay (ms)
    int              TxnError;              // error code providing
more detail for TxnStatus
    int              w_id;                 // warehouse
ID
    BYTE             d_id;                 // assigned district ID
for this thread
    BYTE             d_id_ThisTxn;          // district ID chosen for this
particular
    BYTE             TxnStatus;             // completion status for
txn to indicate errors
    BYTE             reserved;              // for word alignment
    TXN_DETAILS      TxnDetails;            // 
} TXN_RECORD_TPCC, *PTXN_RECORD_TPCC;

// TPC-C Deferred Delivery Txn Record Layout:
// 
// Incorporating delivery transaction information into the above
// structure would increase the size of TXN_DETAILS from 8 to 42 bytes.
// Hence, we store delivery transaction details in a separate structure.
//
typedef struct _TXN_RECORD_TPCC_DELIV_DEF
{
    // common header; must exactly match TXN_RECORD_HEADER
    JULIAN_TIME      TxnStartT0;           // start of
txn
    BYTE             TxnType;              // =
TXN_REC_TYPE_TPCC_DELIV_DEF
    BYTE             TxnSubType;            // = 0
    // end of common header

    int              DeltaT4;              // response time (ms)
    int              DeltaTxnExec;          // execution time (ms)
    int              w_id;                 // warehouse
ID
    BYTE             TxnStatus;             // completion status for
txn to indicate errors

```

```

        BYTE      reserved;          // for word alignment
        short     o_carrier_id;      // carrier id
        long      o_id[10];          // returned delivery transaction
ids
    } TXN_RECORD_TPCC_DELIV_DEF, *PTXN_RECORD_TPCC_DELIV_DEF;

#define TXN_LOG_VERSION      2
#define TXN_DATA_START        4096       // offset in log file
where log records start
#define TXN_LOG_EYE_CATCHER "BC"      // signature bytes at the start of
log file

///////////////////////////////
/// The transaction log has a header as the first 4K block.
//typedef struct _TXN_LOG_HEADER
//{
//    char           EyeCatcher[2];      // signature
bytes; should always be "BC"
    int            LogVersion;
// set to TXN_LOG_VERSION
    JULIAN_TIME    BeginTxnTS;         //
timestamp of first (lowest) txn start
    JULIAN_TIME    EndTxnTS;          // timestamp
of last (highest) txn completion time
    int            iRecCount;
// number of records in log file
    BOOL           bLogSorted;
    int            iFileSize;
// file size in bytes

// the record map provides a fast way to get close to a
particular timestamp in a sorted log file.
//    struct
//    {
//        JULIAN_TIME    TS;
//        // timestamp of record
//        int             iPos;
//        // byte position in file
//        }             RecMap[RecMapSize];
// #define RecMapSize          200

} TXN_LOG_HEADER, *PTXN_LOG_HEADER;

/* Header of the sorted pointers blocks in Temp file (in merging). */
typedef struct BLOCK_HEADER {
    long   BlockPos;
    __int64 CurPos;
    DWORD  BytesRead;
    int    nRecords;
    BYTE   *offset; /* offset of pointers to records in the log
file */
} BLOCK_HEADER, *PBLOCK_HEADER;

#define READ_BUFFER_SIZE        64*1024
#define WRITE_BUFFER_SIZE       8*1024

```

```

#define NUM_READ_BUFFERS        1
#define NUM_WRITE_BUFFERS       2
#define MAX_NUM_BUFFERS         2

// flags passed in to the constructor
#define TXN_LOG_WRITE           0x01
#define TXN_LOG_READ            0x02
#define TXN_LOG_SORTED          0x04
#define TXN_LOG_CRASHOPEN        0x08
tolerated; used for recovery
// if set, invalid headers will be

#define TXN_LOG_OS_ERROR        1
#define TXN_LOG_NOT_SORTED      2

#define SKIP_CTRL_RECS          1

class CTxnLog
{
private:
    DWORD   iBufferSize;
    //buffer allocated size
    DWORD   iBytesFreeInBuffer; //total bytes
available for use in buffer
    int     iNumBuffers;
    //buffers in use
    int     iActiveBuffer;
    //indicates which buffer is active: 0 or 1
    int     iIoBuffer;
    //buffer for any pending IO operation
    int     iFilePointer;
//    //position in file.
    LARGE_INTEGER lFilePointer; //position in
file.
    int     iNextRec;
//when reading, ordinal value of next record

// A "save point" is remembered each time GetNextRecord is
called with a start time specified.
// The next time it is called, if start time is after the save
point, we start scanning from the
// save point. This is particularly useful in FindBestInterval,
where the log is scanned repeatedly.
    JULIAN_TIME    SavePtTime;
//    int             iSavePtFilePointer;
    LARGE_INTEGER   lSavePtFilePointer;
    int             iSavePtNextRec;

    JULIAN_TIME    lastTS;
//when writing sorted output, used to verify records are sorted
    BOOL           bWrite;
//writing log file
    BOOL           bCrashOpen;
// tolerate bad headers and consistency checks
    BOOL           bLogSorted;
// is log file sorted? applies to both input and output
    JULIAN_TIME    BeginTxnTS;
// timestamp of first (lowest) txn start
    JULIAN_TIME    EndTxnTS;
// timestamp of last (highest) txn completion time
    int            iRecCount;
// number of records in log file

```

```

        BYTE          *pCurrent;
    //ptr to current buffer
        BYTE          *pBuffer[MAX_NUM_BUFFERS];

        PTXN_RECORD_HEADER *TxnArray;           //transaction
record pointer array for sort

        DWORD          dwError;
        HANDLE         hTxnFile;
//handle to log file
        HANDLE         hMapFile;
//map file used when sorting the log
        HANDLE         hIoComplete;
//event to signify that there are no pending IOs
        HANDLE         hLogFileIo;
//event to signal the IO thread to write the inactive buffer

        Spinlock      Spin;
//spin lock to protect the txn log file buffers

        FILE           *tmpFile;
//temp file for merging sorted pieces
        PBLOCK_HEADER tmpHeaders;
//sorted pointers block header
        BYTE           **recPointers;
//record pointer buffers for each sorted block
        PTXN_RECORD_HEADER *recBuffers;         //record buffers for
each sorted block
        int            *PointersRead;
//# of pointers processed in each block
        BOOL           *BlockAvailable;         //whether to
check a particular block for jmin

        int            nBlocks;
        int            jmin;
//index (block-wise) of the lowest timestamp record
        int            iAvgRecordLen;
//average record length

        int            iSortedReturnedCount;
//keeps track of the # of sorted records returned through
GetSortedRecord()

        int Write(BYTE *ptr, DWORD Size);
static void LogFileIO(CTxnLog *);

        void LoadBuffers(int j);                //used in
sort/merge to load record buffers

public:

    CTxnLog::CTxnLog(LPCTSTR szFileName, DWORD dwOpts);
~CTxnLog(void);

    int WriteToLog(PTXN_RECORD_TPCC pTxnRcord);
    int WriteToLog(PTXN_RECORD_TPCC_DELIV_DEF pTxnRcord);
    int WriteToLog(PTXN_RECORD_CONTROL pCtrlRec);
    int WriteToLog(PTXN_RECORD_HEADER pCtrlRec);

    int WriteCtrlRecToLog(BYTE SubType, LPTSTR lpStr, DWORD dwLen);

    void CloseTransactionLogFile(void);

```

```

        PTXN_RECORD_HEADER GetNextRecord(BOOL bSkipCtrlRecs = FALSE);
        PTXN_RECORD_HEADER GetNextRecord(JULIAN_TIME SeekTimeT0, BOOL
bSkipCtrlRecs = FALSE);

        int Sort(void);
        PTXN_RECORD_HEADER GetSortedRecord();

        inline BOOL IsSorted(void) { return bLogSorted; }
        inline JULIAN_TIME BeginTS(void) { return BeginTxnTS; }
        inline JULIAN_TIME EndTS(void) { return EndTxnTS; }
        inline int RecordCount(void) { return iRecCount; }

};

class CTXNLOG_ERR : public CBaseErr
{
public:
    enum CTXNLOG_ERRS
    {
        ERR_BAD_FILE_FORMAT,                                // "File
format is invalid."
        ERR_UNKNOWN_LOG_VERSION,                           // "Log file version is
unknown."
        ERR_BROKEN_LOG_FILE,                             // "Log file
is broken."
        ERR_LOG_NOT_SORTED,                            // "Log file
is not sorted"
        ERR_INVALID_TIME_SEQ,                           // "Internal
Error: Record Time Sequence invalid."
    };

    CTXNLOG_ERR(int iErr) : CBaseErr(iErr) {}

    int ErrorType() {return ERR_TYPE_TXNLOG);}

    char *ErrorText()
    {
        static char *szMsgs[] = {
            "File format is invalid.",
            "Log file version is unknown.",
            "Log file is broken.",
            "Log file is not sorted",
            "Internal Error: Record Time Sequence
invalid.",
            ""
        };

        for(int i = 0; szMsgs[i][0]; i++)
        {
            if ( m_idMsg == i )
                break;
        }

        return(szMsgs[i][0] ? szMsgs[i] : ERR_UNKNOWN);
    };
}

```

Appendix B: *Database Design*

The TPC-C database was created with the following Transact-SQL scripts:

RunSQLCfg.sql

```
-- File:      RUNSQLCFG.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   This script file is used to set runtime server configuration
parameters
-- 

exec sp_configure "show advanced option", 1
go

reconfigure with override
go

/* change this value to approximately the number of connected users */
exec sp_configure "max worker threads",255

/* increase priority of user threads */
exec sp_configure "priority boost",1

/* disable automatic checkpointing */
exec sp_configure "recovery interval",32767

/* change to a mask appropriate for the number of processors on the server */
exec sp_configure "affinity mask",0xf

/* enable fibers */
exec sp_configure "lightweight pooling",1

go

reconfigure with override
go
```

VerifyTpccLoad.sql

```
-- File:      VERIFYTPCCLOAD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Performs series of TPCC database checks to verify
that database load completed correctly

print      ""
select    convert(char(30), getdate(),9)
```

```
print      ""

use tpcc
go

-- *****
-- Check rows per table from SYSINDEXES
-- *****

print      'WAREHOUSE TABLE'

select    rows
from     sysindexes
where    id      = object_id("warehouse")
go

print      'DISTRICT TABLE = (10 * No of warehouses)'

select    rows
from     sysindexes
where    id      = object_id("district")
go

print      'ITEM TABLE = 100,000'

select    rows
from     sysindexes
where    id      = object_id("item")
go

print      'CUSTOMER TABLE = (30,000 * No of warehouses)'

select    rows
from     sysindexes
where    id      = object_id("customer")
go

print      'ORDERS TABLE = (30,000 * No of warehouses)'

select    rows
from     sysindexes
where    id      = object_id("orders")
go

print      'HISTORY TABLE = (30,000 * No of warehouses)'

select    rows
from     sysindexes
where    id      = object_id("history")
go

print      'STOCK TABLE = (100,000 * No of warehouses)'

select    rows
from     sysindexes
where    id      = object_id("stock")
go

print      'ORDER_LINE TABLE = (300,000 * No of warehouses + some change)'

select    rows
```

```

from      sysindexes
where     id      =object_id("order_line")
go

print   'NEW_ORDER TABLE = (9000 * No of warehouses)'

select    rows
from      sysindexes
where     id      =object_id("new_order")
go

-- *****
-- Check indices
--

print *****Index Check*****'

use tpcc
go

sp_helpindex    customer
go

sp_helpindex    stock
go

sp_helpindex    district
go

sp_helpindex    item
go

sp_helpindex    new_order
go

sp_helpindex    orders
go

sp_helpindex    order_line
go

sp_helpindex    warehouse
go

```

backup.sql

```

-- File:      BACKUP.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates backup of tpcc database

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

dump database tpcc to tpccback1, tpccback2, tpccback3, tpccback4 with init, stats =
1

```

```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
go

```

backupdev.sql

```

-- File:      BACKUPDEVB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates tpcc database Backup Devices

use master
go

-- create backup devices

exec sp_addumpdevice 'disk','tpccback1','W:\tpccback1.dmp'
go
exec sp_addumpdevice 'disk','tpccback2','X:\tpccback2.dmp'
go
exec sp_addumpdevice 'disk','tpccback3','Y:\tpccback3.dmp'
go
exec sp_addumpdevice 'disk','tpccback4','Z:\tpccback4.dmp'
go

```

config.sql

```

-- File:      CONFIG.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Collects SQL Server configuration parameters

PRINT      " "
SELECT    convert(char(30), getdate(),9)
PRINT      " "
go

sp_configure "show advanced",1
go
reconfigure with override
go
sp_configure
go

```

createdb.sql

```

-- File:      CREATEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates tpcc database and backup files

use master

```

```

go
-- Create temporary table for timing

if exists ( select name from sysobjects where name = 'tpcc_timer' )
    drop table tpcc_timer
go

create table tpcc_timer
(
    start_date           char(30),
    end_date             char(30)
)
insert      into tpcc_timer values (0,0)
go

-- Store starting time
update     tpcc_timer
set        start_date      = (select convert(char(30), getdate(),9))
go

-- create main database files

CREATE DATABASE tpcc
ON PRIMARY
(
    NAME          = MSSQL_tpcc_root,
    FILENAME     = "C:\MSSQL_tpcc_root.mdf",
    SIZE          = 8MB,
    FILEGROWTH   = 0),
FILEGROUP MSSQL_misc_fg
(
    NAME          = MSSQL_misc0,
    FILENAME     = "G:",
    SIZE          = 23775MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc1,
    FILENAME     = "I:",
    SIZE          = 23775MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc2,
    FILENAME     = "K:",
    SIZE          = 23775MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_misc3,
    FILENAME     = "M:",
    SIZE          = 23775MB,
    FILEGROWTH   = 0),

FILEGROUP MSSQL_cs_fg
(
    NAME          = MSSQL_cs0,
    FILENAME     = "F:",
    SIZE          = 49050MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs1,
    FILENAME     = "H:",
    SIZE          = 49050MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs2,
    FILENAME     = "J:",
    SIZE          = 49050MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_cs3,

```

```

    FILENAME     = "L:",
    SIZE          = 49050MB,
    FILEGROWTH   = 0)

LOG ON
(
    NAME          = MSSQL_tpcc_log,
    FILENAME     = "E:",
    SIZE          = 104128MB,
    FILEGROWTH   = 0)
COLLATE Latin1_General_BIN
go

-- Store ending time
update     tpcc_timer
set        end_date      = (select convert(char(30), getdate(),9))
go

select "Elapsed time (in seconds): ", datediff(second,(select start_date from
tpcc_timer),(select end_date from tpcc_timer))

-- remove temporary table

if exists ( select name from sysobjects where name = 'tpcc_timer' )
    drop table tpcc_timer
go

```

dbopt1.sql

```

-- File:    DBOPT1.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.41
--          Copyright Microsoft, 2001
-- Purpose: Sets database options for data load

use master
go

exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
exec sp_dboption tpcc,'torn page detection',false
go

use tpcc
go

checkpoint
go

```

dbopt2.sql

```

-- File:    DBOPT2.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.41
--          Copyright Microsoft, 2001
-- Purpose: Resets database options after data load
exec sp_dboption tpcc,'select into/bulkcopy',false

```

```

exec sp_dboption tpcc,'trunc. log on chkpt.',false
exec sp_dboption tpcc,'torn page detection',false
GO

USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates',1
GO

RECONFIGURE WITH OVERRIDE
GO

DECLARE @msg varchar(50)

<--          --
<--  OPTIONS FOR SQL SERVER 2000  --
<-- Set option values for user-defined indexes --
<--          --

SET @msg = ''
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ''
PRINT @msg

EXEC sp_indexoption 'customer',      'DisallowPageLocks',      TRUE
EXEC sp_indexoption 'district',      'DisallowPageLocks',      TRUE
EXEC sp_indexoption 'warehouse',     'DisallowPageLocks',      TRUE
EXEC sp_indexoption 'stock',         'DisallowPageLocks',      TRUE
EXEC sp_indexoption 'order_line',    'DisallowRowLocks',       TRUE
EXEC sp_indexoption 'orders',        'DisallowRowLocks',       TRUE
EXEC sp_indexoption 'new_order',     'DisallowRowLocks',       TRUE
EXEC sp_indexoption 'item',          'DisallowRowLocks',       TRUE
EXEC sp_indexoption 'item',          'DisallowPageLocks',      TRUE
GO

Print ''
Print *****
Print 'Pre-specified Locking Hierarchy:'
Print '  Lockflag = 0 ==> No pre-specified hierarchy'
Print '  Lockflag = 1 ==> Lock at Page-level then Table-level'
Print '  Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '  Lockflag = 3 ==> Lock at Table-level'
Print ''

SELECT name,lockflags
FROM sysindexes
WHERE object_id('warehouse')      = id OR
      object_id('district')       = id OR
      object_id('customer')       = id OR
      object_id('stock')          = id OR
      object_id('orders')         = id OR
      object_id('order_line')     = id OR
      object_id('history')        = id OR
      object_id('new_order')      = id OR
      object_id('item')           = id
ORDER BY lockflags asc
GO

```

```

sp_configure 'allow updates',0
GO

RECONFIGURE WITH OVERRIDE
GO

EXEC sp_dboption tpcc,      'auto update statistics',      FALSE
EXEC sp_dboption tpcc,      'auto create statistics',      FALSE
GO

EXEC sp_tableoption 'district',      'pintable',true
EXEC sp_tableoption 'warehouse',     'pintable',true
EXEC sp_tableoption 'new_order',    'pintable',true
EXEC sp_tableoption 'item',         'pintable',true
GO

```

delivery.sql

```

-- File: DELIVERY.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Creates delivery transaction stored procedure
-- Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = 'tpcc_delivery' )
   drop procedure tpcc_delivery
go

create proc tpcc_delivery      @w_id      smallint,
                                @o_carrier_id  smallint
as

declare @d_id      tinyint,
        @_id      int,
        @c_id      int,
        @total     numeric(12,2),
        @oid1     int,
        @oid2     int,
        @oid3     int,
        @oid4     int,
        @oid5     int,
        @oid6     int,
        @oid7     int,
        @oid8     int,
        @oid9     int,
        @oid10    int

select @d_id = 0

begin tran d

while (@d_id < 10)
begin

select      @_id = @d_id + 1,
            @total = 0,

```

```

@o_id = 0

select top 1
    @o_id = no_o_id
from new_order (serializable updlock)
where no_w_id = @w_id and
no_d_id = @d_id
order by no_o_id asc

if (@@rowcount <> 0)
begin

-- claim the order for this district

    delete new_order
    where no_w_id = @w_id and
no_d_id = @d_id and
no_o_id = @o_id

-- set carrier_id on this order (and get customer id)

    update orders
    set o_carrier_id = @o_carrier_id,
        @c_id = o_c_id
    where o_w_id = @w_id and
o_d_id = @d_id and
o_id = @o_id

-- set date in all lineitems for this order (and sum amounts)

    update order_line
    set ol_delivery_d = getdate(),
        @total = @total + ol_amount
    where ol_w_id = @w_id and
ol_d_id = @d_id and
ol_o_id = @o_id

-- accummulate lineitem amounts for this order into customer

    update customer
    set c_balance = c_balance + @total,
        c_delivery_cnt = c_delivery_cnt + 1
    where c_w_id = @w_id and
c_d_id = @d_id and
c_id = @c_id

end

select @oid1 = case @d_id when 1 then @o_id else @oid1 end,
    @oid2 = case @d_id when 2 then @o_id else @oid2 end,
    @oid3 = case @d_id when 3 then @o_id else @oid3 end,
    @oid4 = case @d_id when 4 then @o_id else @oid4 end,
    @oid5 = case @d_id when 5 then @o_id else @oid5 end,
    @oid6 = case @d_id when 6 then @o_id else @oid6 end,
    @oid7 = case @d_id when 7 then @o_id else @oid7 end,
    @oid8 = case @d_id when 8 then @o_id else @oid8 end,
    @oid9 = case @d_id when 9 then @o_id else @oid9 end,
    @oid10 = case @d_id when 10 then @o_id else @oid10 end

end

commit tran d

```

-- return delivery data to client

```

select @oid1,
    @oid2,
    @oid3,
    @oid4,
    @oid5,
    @oid6,
    @oid7,
    @oid8,
    @oid9,
    @oid10

```

go

getargs.c

```

// File: GETARGS.C
// Microsoft TPC-C Kit Ver. 4.41
// Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001
// Purpose: Source file for command line processing

// Includes
#include "tpcc.h"

//=====
// Function name: GetArgsLoader
//=====

void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{
    int i;
    char *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int) GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server = SERVER;
    pargs->user = USER;
    pargs->password = PASSWORD;
    pargs->database = DATABASE;
    pargs->batch = BATCH;
    pargs->num_warehouses = UNDEF;
    pargs->tables_all = TRUE;
    pargs->table_item = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer = FALSE;
    pargs->loader_res_file = LOADER_RES_FILE;
    pargs->log_path = LOG_PATH;
    pargs->pack_size = DEFLDPACKSIZE;
    pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
    pargs->build_index = BUILD_INDEX;
    pargs->index_order = INDEX_ORDER;
    pargs->index_script_path = INDEX_SCRIPT_PATH;

```

```

    pargs->scale_down           = SCALE_DOWN;

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for ( i = 1; i < argc; ++i )
{
    if ( argv[i][0] != '-' && argv[i][0] != '/' )
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];

    switch (ptr[1])
    {
        case '?': /* Fall through */
            GetArgsLoaderUsage();
            break;

        case 'D':
            pargs->database = ptr+2;
            break;

        case 'P':
            pargs->password = ptr+2;
            break;

        case 'S':
            pargs->server = ptr+2;
            break;

        case 'U':
            pargs->user = ptr+2;
            break;

        case 'b':
            pargs->batch = atol(ptr+2);
            break;

        case 'W':
            pargs->num_warehouses = atol(ptr+2);
            break;

        case 's':
            pargs->starting_warehouse = atol(ptr+2);
            break;

        case 't':
            {
                pargs->tables_all = FALSE;
                if (strcmp(ptr+2,"item") == 0)
                    pargs->table_item =
TRUE;
                == 0)
                    pargs->table_warehouse =
TRUE;
                == 0)
                    else if (strcmp(ptr+2,"customer"))
                }
            }
    }

    pargs->table_customer =
    else if (strcmp(ptr+2,"orders") ==
    pargs->table_orders =
    else
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }
    break;
}

case 'f':
    pargs->loader_res_file = ptr+2;
    break;

case 'L':
    pargs->log_path = ptr+2;
    break;

case 'p':
    pargs->pack_size = atol(ptr+2);
    break;

case 'i':
    pargs->build_index = atol(ptr+2);
    break;

case 'o':
    pargs->index_order = atol(ptr+2);
    break;

case 'c':
    pargs->scale_down = atol(ptr+2);
    break;

case 'd':
    pargs->index_script_path = ptr+2;
    break;

default:
    GetArgsLoaderUsage();
    exit(-1);
}
}

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
    printf("Number of Warehouses is required\n");
    exit(-2);
}

return;
//=====

```

```

// Function name: GetArgsLoaderUsage
// =====
void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

    printf("TPCCLDR:\n");
    printf("Parameter                               Default\n");
    printf("-----\n");
    printf("-W Number of Warehouses to Load          Required\n");
    printf("-S Server                                %s\n", SERVER);
    printf("-U Username                               %s\n", USER);
    printf("-P Password                               %s\n", PASSWORD);
    printf("-D Database                               %s\n", DATABASE);
    printf("-b Batch Size                            %ld\n",
(Blong) BATCH);
    printf("-p TDS packet size                      %ld\n",
(DEFLDPACKSIZE);
    printf("-f Loader Results Output Filename        %s\n",
LOADER_RES_FILE);
    printf("-s Starting Warehouse                     %ld\n",
(DEF_STARTING_WAREHOUSE);
    printf("-i Build Option (data = 0, data and index = 1) %ld\n",
(Blong) BUILD_INDEX);
    printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n",
(INDEX_ORDER);
    printf("-c Build Scaled Database (normal = 0, tiny = 1)   %ld\n",
(SCALE_DOWN);
    printf("-d Index Script Path                   %s\n",
INDEX_SCRIPT_PATH);
    printf("-t Table to Load                         all tables
\n");
    printf("      [item|warehouse|customer|orders]\n");
    printf("      Notes: \n");
    printf("          - the '-t' parameter may be included multiple times to \n");
    printf("              specify multiple tables to be loaded \n");
    printf("          - 'item' loads ITEM table \n");
    printf("          - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n");
    printf("          - 'customer' loads CUSTOMER and HISTORY tables \n");
    printf("          - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \n");

    printf("\nNote: Command line switches are case sensitive.\n");

    exit(0);
}

```

idxcuscl.sql

```

-- File:     IDXCUSCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:  Creates clustered index on customer table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_cl' )
    drop index customer.customer_cl

create unique clustered index customer_cl on customer(c_w_id, c_d_id, c_id)
on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxcusnc.sql

```

-- File:     IDXCUSNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:  Creates non-clustered index on customer table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_ncl' )
    drop index customer.customer_ncl

create unique nonclustered index customer_ncl on customer(c_w_id, c_d_id, c_last,
c_first, c_id)
on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxdiscl.sql

```

-- File:     IDXDISCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:  Creates clustered index on district table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'district_cl' )
    drop index district.district_cl

create unique clustered index district_cl on district(d_w_id, d_id)
    with fillfactor=100 on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxitmcl.sql

```

-- File:      IDXITMCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on item table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'item_cl' )
    drop index item.item_cl

create unique clustered index item_cl on item(i_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxnodcl.sql

```

-- File:      IDXNODCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on new_order table

use tpcc
go

```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'new_order_cl' )
    drop index new_order.new_order_cl

create unique clustered index new_order_cl on new_order(no_w_id, no_d_id, no_o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxodlcl.sql

```

-- File:      IDXODLCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on order_line table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'order_line_cl' )
    drop index order_line.order_line_cl

create unique clustered index order_line_cl on order_line.ol_w_id, ol_d_id, ol_o_id,
ol_number
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxordcl.sql

```

-- File:      IDXORDCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on orders table

use tpcc
go

```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_c1' )
    drop index orders.orders_c1

create unique clustered index orders_c1 on orders(o_w_id, o_d_id, o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxordnc.sql

```

-- File:      IDXORDNC.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates non-clustered index on orders table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_ncl' )
    drop index orders.orders_ncl

create index orders_ncl on orders(o_w_id, o_d_id, o_c_id, o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxstkcl.sql

```

-- File:      IDXSTKCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on stock table

use tpcc
go

declare @startdate datetime
declare @enddate datetime

```

```

select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'stock_c1' )
    drop index stock.stock_c1

create unique clustered index stock_c1 on stock(s_i_id, s_w_id)
    on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxwarcl.sql

```

-- File:      IDXWARCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on warehouse table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'warehouse_c1' )
    drop index warehouse.warehouse_c1

create unique clustered index warehouse_c1 on warehouse(w_id)
    with fillfactor=100 on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

neword.sql

```

-- File:      NEWORD.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates new order transaction stored procedure
--             Interface Level: 4.10.000

use tpcc
go

if exists ( select name from sysobjects where name = 'tpcc_neworder' )
    drop procedure tpcc_neworder
go

```

```

create proc tpcc_neworder
    smallint = 0, @ol_qty1  smallint = 0,
    smallint = 0, @ol_qty2  smallint = 0,
    smallint = 0, @ol_qty3  smallint = 0,
    smallint = 0, @ol_qty4  smallint = 0,
    smallint = 0, @ol_qty5  smallint = 0,
    smallint = 0, @ol_qty6  smallint = 0,
    smallint = 0, @ol_qty7  smallint = 0,
    smallint = 0, @ol_qty8  smallint = 0,
    smallint = 0, @ol_qty9  smallint = 0,
    smallint = 0, @ol_qty10 smallint = 0,
    smallint = 0, @ol_qty11 smallint = 0,
    smallint = 0, @ol_qty12 smallint = 0,
    smallint = 0, @ol_qty13 smallint = 0,
    smallint = 0, @ol_qty14 smallint = 0,
    smallint = 0, @ol_qty15 smallint = 0

    as
declare   @w_tax      numeric(4,4),
          @d_tax      numeric(4,4),
          @c_last     char(16),
          @c_credit   char(2),
          @c_discount numeric(4,4),
          @i_price    numeric(5,2),
          @i_name     char(24),
          @i_data     char(50),
          @o_entry_d  datetime,
          @remote_flag int,
          @s_quantity smallint,
          @s_data     char(50),
          @s_dist     char(24),
          @li_no      int,
          @o_id       int,
          @commit_flag tinyint,
          @li_id      int,
          @li_s_w_id  smallint,
          @li_qty     smallint,
          @ol_number  int,
          @c_id_local int
begin

```

```

begin transaction n

-- get district tax and next available order id and update
-- plus initialize local variables

update   district
set      @d_tax      = d_tax,
        @o_id       = d_next_o_id,
        d_next_o_id = d_next_o_id + 1,
        @o_entry_d  = getdate(),
        @li_no      = 0,
        @commit_flag = 1
where    d_w_id      = @w_id and
        d_id       = @d_id

-- process orderlines

while (@li_no < @o.ol_cnt)
begin

    select @li_no = @li_no + 1

    -- set i_id, s_w_id, and qty for this lineitem

    select   @li_id = case @li_no
                           when 1 then @i_id1
                           when 2 then @i_id2
                           when 3 then @i_id3
                           when 4 then @i_id4
                           when 5 then @i_id5
                           when 6 then @i_id6
                           when 7 then @i_id7
                           when 8 then @i_id8
                           when 9 then @i_id9
                           when 10 then @i_id10
                           when 11 then @i_id11
                           when 12 then @i_id12
                           when 13 then @i_id13
                           when 14 then @i_id14
                           when 15 then @i_id15
                           end,
            @li_s_w_id = case @li_no
                           when 1 then @s_w_id1
                           when 2 then @s_w_id2
                           when 3 then @s_w_id3
                           when 4 then @s_w_id4
                           when 5 then @s_w_id5
                           when 6 then @s_w_id6
                           when 7 then @s_w_id7
                           when 8 then @s_w_id8
                           when 9 then @s_w_id9
                           when 10 then @s_w_id10
                           when 11 then @s_w_id11
                           when 12 then @s_w_id12
                           when 13 then @s_w_id13
                           when 14 then @s_w_id14
                           when 15 then @s_w_id15
                           end,
            @li_qty = case @li_no
                           when 1 then @ol_qty1
                           end

```

```

when 2 then @ol_qty2
when 3 then @ol_qty3
when 4 then @ol_qty4
when 5 then @ol_qty5
when 6 then @ol_qty6
when 7 then @ol_qty7
when 8 then @ol_qty8
when 9 then @ol_qty9
when 10 then @ol_qty10
when 11 then @ol_qty11
when 12 then @ol_qty12
when 13 then @ol_qty13
when 14 then @ol_qty14
when 15 then @ol_qty15
end

-- get item data (no one updates item)

select    @i_price = i_price,
          @i_name  = i_name,
          @i_data   = i_data
from      item (tablelock repeatableread)
where     i_id = @li_id

-- update stock values

update    stock
set       s_ytd      = s_ytd + @li_qty,
          @s_quantity = s_quantity - @li_qty +
                                     case when
(s_quantity - @li_qty < 10) then 91 else 0 end,
          s_order_cnt = s_order_cnt + 1,
          s_remote_cnt = s_remote_cnt + case when
(@li_s_w_id = @w_id) then 0 else 1 end,
          @s_data    = s_data,
          @s_dist   = case @d_id
                        when 1 then s_dist_01
                        when 2 then s_dist_02
                        when 3 then s_dist_03
                        when 4 then s_dist_04
                        when 5 then s_dist_05
                        when 6 then s_dist_06
                        when 7 then s_dist_07
                        when 8 then s_dist_08
                        when 9 then s_dist_09
                        when 10 then s_dist_10
end
where     s_i_id    = @li_id and
          s_w_id    = @li_s_w_id

-- if there actually is a stock (and item) with these ids, go to work

if (@@rowcount > 0)
begin

-- insert order_line data (using data from item and stock)

insert into order_line values(@o_id,
                           @d_id,
                           @w_id,
                           @li_no,
                           @li_qty,
                           @i_price * @s_dist)

-- send line-item data to client

select    @i_name,
          @s_quantity,
          b_g = case when (
patindex('%ORIGINAL%',@i_data) > 0) and
(patindex('%ORIGINAL%',@s_data) > 0) )
then 'B' else 'G' end,
          @i_price,
          @i_price * @li_qty
end
else
begin

-- no item (or stock) found - triggers rollback condition

select ''',0,'',0,0
select @commit_flag = 0
end
end

-- get customer last name, discount, and credit rating

select    @c_last    = c_last,
          @c_discount = c_discount,
          @c_credit   = c_credit,
          @c_id_local = c_id
from      customer (repeatableread)
where     c_id        = @c_id and
          c_w_id     = @w_id and
          c_d_id     = @d_id

-- insert fresh row into orders table

insert into orders values (   @o_id,
                           @d_id,
                           @w_id,
                           @c_id_local,
                           @o_entry_d,
                           0,
                           @o.ol_cnt,
                           @o.all_local)

-- insert corresponding row into new-order table

insert into new_order values (   @o_id,
                                 @d_id,
                                 @w_id)

-- select warehouse tax

select    @w_tax     = w_tax

```

```

from      warehouse (repeatableread)
where     w_id      = @w_id

if (@commit_flag = 1)
    commit transaction n
else

-- all that work for nuthin!!!

        rollback transaction n

-- return order data to client

select    @w_tax,
          @d_tax,
          @o_id,
          @c_last,
          @c_discount,
          @c_credit,
          @o_entry_d,
          @commit_flag

end

go

```

null-txns.sql

```

-- File:      NULL-TXNS.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
--
-- Purpose:   This script will create stored procs which accept the same parameters
and
--           return correctly formed results sets to match the standard TPC-C
stored
--           procs. Of course, the advantage is that these stored procs place
almost
--           no load on SQL Server and do not require a database.
--
--           The purpose of these stored procs is to size and test the web client
without
--           the need of a fully scaled database.
--

drop proc tpcc_delivery
drop proc tpcc_neworder
drop proc tpcc_orderstatus
drop proc tpcc_payment
drop proc tpcc_stocklevel
drop proc tpcc_version
drop table order_line_null
go

create proc tpcc_delivery      @w_id      smallint,
                                @o_carrier_id  smallint
as

declare @d_id tinyint,
        @o_id int,
        @c_id int,

```

```

@total numeric(12,2),
@oid1 int,
@oid2 int,
@oid3 int,
@oid4 int,
@oid5 int,
@oid6 int,
@oid7 int,
@oid8 int,
@oid9 int,
@oid10 int

declare @delaytime varchar(30)

-- uniform random delay of 0 - 1 second; avg = 0.50
select @delaytime = '00:00:0' + cast(cast((rand()*1.00) as decimal(4,3)) as char(5))
waitfor delay @delaytime

select 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001

GO

create proc tpcc_neworder
@w_id      smallint,
@d_id      tinyint,
@c_id      int,
@o.ol_cnt tinyint,
@o.all_local tinyint,
@i_id1  int = 0, @s_w_id1 smallint
= 0, @ol_qty1 smallint = 0,
= 0, @ol_qty2 smallint = 0,
= 0, @ol_qty3 smallint = 0,
= 0, @ol_qty4 smallint = 0,
= 0, @ol_qty5 smallint = 0,
= 0, @ol_qty6 smallint = 0,
= 0, @ol_qty7 smallint = 0,
= 0, @ol_qty8 smallint = 0,
= 0, @ol_qty9 smallint = 0,
smallint = 0, @ol_qty10 smallint = 0,
smallint = 0, @ol_qty11 smallint = 0,
smallint = 0, @ol_qty12 smallint = 0,
smallint = 0, @ol_qty13 smallint = 0,
smallint = 0, @ol_qty14 smallint = 0,
smallint = 0, @ol_qty15 smallint = 0

@i_id2  int = 0, @s_w_id2 smallint
@i_id3  int = 0, @s_w_id3 smallint
@i_id4  int = 0, @s_w_id4 smallint
@i_id5  int = 0, @s_w_id5 smallint
@i_id6  int = 0, @s_w_id6 smallint
@i_id7  int = 0, @s_w_id7 smallint
@i_id8  int = 0, @s_w_id8 smallint
@i_id9  int = 0, @s_w_id9 smallint
@i_id10 int = 0, @s_w_id10
@i_id11 int = 0, @s_w_id11
@i_id12 int = 0, @s_w_id12
@i_id13 int = 0, @s_w_id13
@i_id14 int = 0, @s_w_id14
@i_id15 int = 0, @s_w_id15

as
declare  @w_tax      numeric(4,4),

```

```

@d_tax      numeric(4,4),
@c_last     char(16),
@c_credit   char(2),
@c_discount numeric(4,4),
@i_price    numeric(5,2),
@i_name     char(24),
@o_entry_d  datetime,
@li_no      int,
@o_id       int,
@commit_flag tinyint,
@li_id      int,
@li_qty     smallint

declare @delaytime varchar(30)

begin
    -- uniform random delay of 0 - 0.6 second; avg = 0.3
    select @delaytime = '00:00:0' + cast(cast((rand()*0.60) as decimal(4,3)) as
char(5))
    waitfor delay @delaytime

    -- process orderlines

    select @commit_flag = 1, @li_no = 0

    while (@li_no < @o.ol_cnt)
        begin

            select @li_id = case @li_no
                when 1 then @i_id1
                when 2 then @i_id2
                when 3 then @i_id3
                when 4 then @i_id4
                when 5 then @i_id5
                when 6 then @i_id6
                when 7 then @i_id7
                when 8 then @i_id8
                when 9 then @i_id9
                when 10 then @i_id10
                when 11 then @i_id11
                when 12 then @i_id12
                when 13 then @i_id13
                when 14 then @i_id14
                when 15 then @i_id15
            end

            select @li_no = @li_no + 1
            select @i_price = 23.45, @li_qty = @li_no

            if (@li_id = 999999)
                begin
                    select '',0,'',0,0
                    select @commit_flag = 0
                end
            else
                begin
                    select 'Item Name blah',17,'G', @i_price, @i_price * @li_qty
                end
        end

    -- return order data to client

```

```

select  @w_tax = 0.1234,
@d_tax = 0.0987,
@o_id = 3001,
@c_last = 'BAROUGHTABLE',
@c_discount = 0.2198,
@c_credit = 'GC',
@o_entry_d = getdate()

select  @w_tax,
@d_tax,
@o_id,
@c_last,
@c_discount,
@c_credit,
@o_entry_d,
@commit_flag

end

GO

create proc tpcc_orderstatus @w_id           smallint,
                             @d_id             tinyint,
                             @c_id             int,
                             @c_last           char(16) = ''
as

declare @c_balance      numeric(12,2),
        @c_first       char(16),
        @c_middle      char(2),
        @o_id          int,
        @o_entry_d     datetime,
        @o_carrier_id  smallint,
        @ol_cnt         smallint

declare @delaytime varchar(30)

-- uniform random delay of 0 - 0.2 second; avg = 0.1
select @delaytime = '00:00:0' + cast(cast((rand()*0.20) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

select
        @c_id      = 113,
        @c_balance = -10.00,
        @c_first   = '8YCodgytqCj8',
        @c_middle  = 'OE',
        @c_last    = 'OUGHTOUGHTABLE',
        @o_id      = 3456,
        @o_entry_d = getdate(),
        @o_carrier_id = 1

select @ol_cnt = (rand() * 11) + 5
SET ROWCOUNT @ol_cnt

select
        ol_supply_w_id,

```

```

        ol_i_id,
        ol_quantity,
        ol_amount,
        ol_delivery_d
    from order_line_null

    select @c_id,
           @c_last,
           @c_first,
           @c_middle,
           @o_entry_d,
           @o_carrier_id,
           @c_balance,
           @o_id

GO

create proc tpcc_payment @w_id          smallint,          @c_w_id
                           numeric(6,2),          @h_amount
                           tinyint,          @d_id
                           tinyint,          @c_d_id
                           char(16) = ''
as
declare @w_street_1      char(20),
        @w_street_2      char(20),
        @w_city          char(20),
        @w_state         char(2),
        @w_zip           char(9),
        @w_name          char(10),
        @d_street_1      char(20),
        @d_street_2      char(20),
        @d_city          char(20),
        @d_state         char(2),
        @d_zip           char(9),
        @d_name          char(10),
        @c_first          char(16),
        @c_middle         char(2),
        @c_street_1      char(20),
        @c_street_2      char(20),
        @c_city          char(20),
        @c_state         char(2),
        @c_zip           char(9),
        @c_phone          char(16),
        @c_since          datetime,
        @c_credit          char(2),
        @c_credit_lim     numeric(12,2),
        @c_balance         numeric(12,2),
        @c_discount        numeric(4,4),
        @data             char(500),
        @c_data            char(500),
        @datetime          datetime,
        @w_ytd            numeric(12,2),
        @d_ytd            numeric(12,2),
        @cnt              smallint,
                           @val          smallint,
                           @screen_data   char(200),
                           @d_id_local    tinyint,
                           @w_id_local    smallint,
                           @c_id_local    int

declare @delaytime varchar(30)

-- uniform random delay of 0 - 0.3 second; avg = 0.15
select @delaytime = '00:00:0' + cast(cast((rand()*0.30) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

select @screen_data = ''


-- get customer info and update balances

select
        @d_street_1 = 'rqSHHakqyV',
        @d_street_2 = 'zZ98nW3BR2s',
        @d_city      = 'ArNr4GNFV9',
        @d_state     = 'aV',
        @d_zip       = '453511111'

-- get warehouse data and update year-to-date

select
        @w_street_1 = 'rqSHHakqyV',
        @w_street_2 = 'zZ98nW3BR2s',
        @w_city      = 'ArNr4GNFV9',
        @w_state     = 'aV',
        @w_zip       = '453511111'

select
        @c_id          = 123,
        @c_balance     = -10000.00,
        @c_first        = 'KmR03Xureb',
        @c_middle       = 'OE',
        @c_last         = 'BAROUGHTBAR',
        @c_street_1     = 'QpGdOHjv8mR9vNI8V',
        @c_street_2     = 'dzKoCobBqbC3yu',
        @c_city          = 'zAKZXdc037FQxq',
        @c_state         = 'QA',
        @c_zip           = '700311111',
        @c_phone          char(16),
        @c_credit        = 'GC',
        @c_credit_lim    = 50000.00,
        @c_discount      = 0.3069,
        @c_since          getdate(),
        @datetime         = getdate()

-- return data to client

select @c_id,
        @c_last,
        @datetime,
        @w_street_1,
        @w_street_2,
        @w_city,
        @w_state,
```

```

@w_zip,
@d_street_1,
@d_street_2,
@d_city,
@d_state,
@d_zip,
@c_first,
@c_middle,
@c_street_1,
@c_street_2,
@c_city,
@c_state,
@c_zip,
@c_phone,
@c_since,
@c_credit,
@c_credit_lim,
@c_discount,
@c_balance,
@screen_data

GO

create proc tpcc_stocklevel    @w_id           smallint,
                                @d_id            tinyint,
                                @threshold      smallint
as
declare @delaytime varchar(30)

-- uniform random delay of 0 - 3.6 second; avg = 1.8
select @delaytime = '00:00:0' + cast(cast((rand()*3.60) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

select 49

GO

create proc tpcc_version
as
declare @version  char(8)

begin
    select @version = '4.10.000'
    select @version as 'Version'
end

GO

CREATE TABLE order_line_null (
    [ol_i_id] [int] NOT NULL ,
    [ol_supply_w_id] [smallint] NOT NULL ,
    [ol_delivery_d] [datetime] NOT NULL ,
    [ol_quantity] [smallint] NOT NULL ,
    [ol_amount] [numeric](6, 2) NOT NULL
) ON [PRIMARY]
GO

insert into order_line_null values ( 101, 1, getdate(), 1, 123.45 )

```

```

insert into order_line_null values ( 102, 1, getdate(), 2, 123.45 )
insert into order_line_null values ( 103, 1, getdate(), 3, 123.45 )
insert into order_line_null values ( 104, 1, getdate(), 4, 123.45 )
insert into order_line_null values ( 105, 1, getdate(), 5, 123.45 )
insert into order_line_null values ( 106, 1, getdate(), 1, 123.45 )
insert into order_line_null values ( 107, 1, getdate(), 2, 123.45 )
insert into order_line_null values ( 108, 1, getdate(), 3, 123.45 )
insert into order_line_null values ( 109, 1, getdate(), 4, 123.45 )
insert into order_line_null values ( 110, 1, getdate(), 5, 123.45 )
insert into order_line_null values ( 111, 1, getdate(), 1, 123.45 )
insert into order_line_null values ( 112, 1, getdate(), 2, 123.45 )
insert into order_line_null values ( 113, 1, getdate(), 3, 123.45 )
insert into order_line_null values ( 114, 1, getdate(), 4, 123.45 )
insert into order_line_null values ( 115, 1, getdate(), 5, 123.45 )

```

GO

ordstat.sql

```

-- File:      ORDSTAT.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates order status transaction stored procedure
--             Interface Level: 4.10.000

use tpcc
go

if exists ( select name from sysobjects where name = 'tpcc_orderstatus' )
    drop procedure tpcc_orderstatus
go

create proc tpcc_orderstatus    @w_id           smallint,
                                @d_id            tinyint,
                                @c_id            int,
                                @c_last          char(16) = ''
as

declare @c_balance      numeric(12,2),
        @c_first       char(16),
        @c_middle      char(2),
        @o_id          int,
        @o_entry_d     datetime,
        @o_carrier_id smallint,
        @cnt           smallint

begin tran o

if (@c_id = 0)
begin
    -- get customer id and info using last name

    select      @cnt      = (count(*)+1)/2
    from        customer (repeatableread)
    where       c_last   = @c_last and
               c_w_id   = @w_id and
               c_d_id   = @d_id

```

```

set      rowcount @cnt

select  @c_id          = c_id,
        @c_balance     = c_balance,
        @c_first       = c_first,
        @c_last        = c_last,
        @c_middle      = c_middle
from    customer (repeatableread)
where   c_last          = @c_last and
        c_w_id          = @w_id and
        c_d_id          = @d_id
order   by c_w_id, c_d_id, c_last, c_first

set      rowcount 0

end

else

begin

-- get customer info if by id

select  @c_balance      = c_balance,
        @c_first       = c_first,
        @c_middle      = c_middle,
        @c_last        = c_last
from    customer (repeatableread)
where   c_id            = @c_id and
        c_d_id          = @d_id and
        c_w_id          = @w_id

select  @cnt           = @@rowcount

end

-- if no such customer

if (@cnt = 0)
begin
    raiserror('Customer not found',18,1)
    goto custnotfound
end

-- get order info

select  @o_id           = o_id,
        @o_entry_d     = o_entry_d,
        @o_carrier_id  = o_carrier_id
from    orders (serializable)
where   o_c_id          = @c_id and
        o_d_id          = @d_id and
        o_w_id          = @w_id
order   by o_id asc

-- select order lines for the current order

select  ol_supply_w_id,
        ol_i_id,
        ol_quantity,
        ol_amount,
        ol_delivery_d
from    order_line (repeatableread)

```

```

where   ol_o_id = @o_id and
        ol_d_id = @d_id and
        ol_w_id = @w_id

custnotfound:

commit tran o

-- return data to client

select  @c_id,
        @c_last,
        @c_first,
        @c_middle,
        @o_entry_d,
        @o_carrier_id,
        @c_balance,
        @o_id

go

```

payment.sql

```

-- File:      PAYMENT.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates payment transaction stored procedure
--             Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = 'tpcc_payment' )
    drop procedure tpcc_payment
go

create proc tpcc_payment      @w_id           smallint,
                                @c_w_id          smallint,
                                @h_amount        numeric(6,2),
                                @d_id            tinyint,
                                @c_d_id          tinyint,
                                @c_id            int,
                                @c_last          char(16) = ''

as
declare @w_street_1    char(20),
        @w_street_2    char(20),
        @w_city         char(20),
        @w_state        char(2),
        @w_zip          char(9),
        @w_name         char(10),
        @d_street_1    char(20),
        @d_street_2    char(20),
        @d_city         char(20),
        @d_state        char(2),
        @d_zip          char(9),
        @d_name         char(10),
        @c_first        char(16),
        @c_middle       char(2),
        @c_street_1    char(20),

```

```

@c_street_2      char(20),
@c_city          char(20),
@c_state         char(2),
@c_zip           char(9),
@c_phone         char(16),
@c_since         datetime,
@c_credit        char(2),
@c_credit_lim   numeric(12,2),
@c_balance       numeric(12,2),
@c_discount      numeric(4,4),
@data            char(500),
@c_data          char(500),
@datetime        datetime,
@w_ytd           numeric(12,2),
@d_ytd           numeric(12,2),
@cnt             smallint,
@val             smallint,
@screen_data     char(200),
@d_id_local     tinyint,
@w_id_local     smallint,
@c_id_local     int

select @screen_data = ''

begin tran p

-- get payment date

    select      @datetime = getdate()

    if (@c_id = 0)
    begin

-- get customer id and info using last name

        select      @cnt      = count(*)
        from       customer (repeatableread)
        where      c_last    = @c_last and
                   c_w_id    = @c_w_id and
                   c_d_id    = @c_d_id

        select      @val = (@cnt + 1) / 2
        set        rowcount @val

        select      @c_id      = c_id
        from       customer (repeatableread)
        where      c_last    = @c_last and
                   c_w_id    = @c_w_id and
                   c_d_id    = @c_d_id
        order      by c_last, c_first

        set        rowcount 0
    end

-- get customer info and update balances

    update      customer
    set        @c_balance      = c_balance      = c_balance - @h_amount,
              c_payment_cnt  = c_payment_cnt + 1,
              c_ytd_payment  = c_ytd_payment + @h_amount,
              @c_first       = c_first,
              @c_middle      = c_middle,

```

```

@c_last          = c_last,
@c_street_1     = c_street_1,
@c_street_2     = c_street_2,
@c_city          = c_city,
@c_state         = c_state,
@c_zip           = c_zip,
@c_phone         = c_phone,
@c_credit        = c_credit,
@c_credit_lim   = c_credit_lim,
@c_discount      = c_discount,
@c_since         = c_since,
@data            = c_data,
@c_id_local     = c_id,
where           c_id      = @c_id and
               c_w_id    = @c_w_id and
               c_d_id    = @c_d_id

-- if customer has bad credit get some more info

if (@c_credit = 'BC')
begin

-- compute new info

    select      @c_data      = convert(char(5),@c_id) +
                           convert(char(4),@c_d_id) +
                           convert(char(5),@c_w_id) +
                           convert(char(4),@d_id) +
                           convert(char(5),@w_id) +
                           convert(char(19),@h_amount) +
                           substring(@data, 1, 458)

-- update customer info

    update      customer
    set        c_data      = @c_data
    where           c_id      = @c_id and
                   c_w_id    = @c_w_id and
                   c_d_id    = @c_d_id

    select      @screen_data = substring (@c_data,1,200)
end

-- get district data and update year-to-date

    update      district
    set        d_ytd      = d_ytd + @h_amount,
              @d_street_1  = d_street_1,
              @d_street_2  = d_street_2,
              @d_city      = d_city,
              @d_state     = d_state,
              @d_zip       = d_zip,
              @d_name      = d_name,
              @d_id_local   = d_id
    where           d_w_id    = @w_id and
                   d_id      = @d_id

-- get warehouse data and update year-to-date

    update      warehouse
    set        w_ytd      = w_ytd + @h_amount,
              @w_street_1  = w_street_1,
              @w_street_2  = w_street_2,

```

```

@w_city          = w_city,
@w_state         = w_state,
@w_zip           = w_zip,
@w_name          = w_name,
@w_id_local      = w_id
where   w_id       = @w_id

-- create history record

insert into history values (  @c_id_local,
                               @c_d_id,
                               @c_w_id,
                               @d_id_local,
                               @w_id_local,
                               @datetime,
                               @h_amount,
                               @w_name + ' ' + @d_name)

commit tran p

-- return data to client

select   @c_id,
         @c_last,
         @datetime,
         @w_street_1,
         @w_street_2,
         @w_city,
         @w_state,
         @w_zip,
         @d_street_1,
         @d_street_2,
         @d_city,
         @d_state,
         @d_zip,
         @c_first,
         @c_middle,
         @c_street_1,
         @c_street_2,
         @c_city,
         @c_state,
         @c_zip,
         @c_phone,
         @c_since,
         @c_credit,
         @c_credit_lim,
         @c_discount,
         @c_balance,
         @screen_data

go

```

random.c

```

// File:           RANDOM.C
//                 Microsoft TPC-C Kit Ver. 4.41
//                 Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001
// Purpose:        Random number generation routines for database loader

// Includes
#include "tpcc.h"

```

```

#include "math.h"

// Defines
#define A          16807
#define M          2147483647
#define Q          127773    /* M div A */
#define R          2836     /* M mod A */
#define Thread     __declspec(thread)

// Globals
long     Thread Seed = 0;      /* thread local seed */

//*********************************************************************
/*
* random -
*     Implements a GOOD pseudo random number generator. This generator
*     will/should? run the complete period before repeating.
*
* Copied from:
*     Random Numbers Generators: Good Ones Are Hard to Find.
*     Communications of the ACM - October 1988 Volume 31 Number 10
*
* Machine Dependencies:
*     long must be 2 ^ 31 - 1 or greater.
*
*/
//********************************************************************

//*********************************************************************
* seed - load the Seed value used in irand and drand. Should be used before
* first call to irand or drand.
//********************************************************************

void seed(long val)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n", Seed, val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

//*********************************************************************
/*
* irand - returns a 32 bit integer pseudo random number with a period of
* 1 to 2 ^ 32 - 1.
*
* parameters:
*     none.
*
* returns:
*     32 bit integer - defined as long ( see above ).
*
* side effects:
*     seed get recomputed.
*/
//********************************************************************/

```

```

long irand()
{
    register long s;      /* copy of seed */
    register long test;   /* test flag */
    register long hi;     /* tmp value for speed */
    register long lo;     /* tmp value for speed */

#ifdef DEBUG
    printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

/*********************drand*************************/
* drand - returns a double pseudo random number between 0.0 and 1.0.
* See irand.
/*********************drand*************************/
double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0 );
}

//===== : RandomNumber
// Description:
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    if ( upper == lower )           /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else

```

```

        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96
perf enhancement */

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

    return rand_num;
}

#ifndef O
//Orginal code pgd 08/13/96
long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper - lower :
upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

    return rand_num;
}
#endif

//===== : NURand
// Description:
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int) GetCurrentThreadId());
#endif

```

```

rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1))+x;

#ifndef DEBUG
    printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(), rand_num);
#endif

    return rand_num;
}

```

removedb.sql

```

-- File:      REMOVEDB.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Removes tpcc database and backup files

use master
go

-- remove any existing database and backup files
exec sp_dbremove tpcc, dropdev
go

exec sp_dropdevice 'tpccback1'
exec sp_dropdevice 'tpccback2'
exec sp_dropdevice 'tpccback3'
exec sp_dropdevice 'tpccback4'
go

```

restore.sql

```

-- File:      RESTORE.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Loads database backup from backup files

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

load database tpcc from tpccback1, tpccback2, tpccback3, tpccback4 with stats = 1

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

sqlshutdown.sql

```

-- File:      SQLSHUTDOWN.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41

```

```

--          Copyright Microsoft, 2001
-- Purpose:   Checkpoints tpcc database and issues a shutdown
--

use tpcc
go
checkpoint
go
shutdown
go

```

stocklev.sql

```

-- File:      STOCKLEV.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates stock level transaction stored procedure
--
--           Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = 'tpcc_stocklevel' )
    drop procedure tpcc_stocklevel
go

create proc tpcc_stocklevel    @w_id           smallint,
                                @d_id            tinyint,
                                @threshold       smallint
as

declare  @o_id_low int,
        @o_id_high int

select   @o_id_low = (d_next_o_id - 20),
        @o_id_high   = (d_next_o_id - 1)
from    district
where   d_w_id          = @w_id and
        d_id           = @d_id

select   count(distinct(s_i_id))
from    stock, order_line
where   ol_w_id          = @w_id and
        ol_d_id          = @d_id and
        ol_o_id          between @o_id_low and
                            @o_id_high and
        s_w_id           = ol_w_id and
        s_i_id           = ol_i_id and
        s_quantity       < @threshold
go

```

strings.c

```

// File:      STRINGS.C
//             Microsoft TPC-C Kit Ver. 4.41
//             Copyright Microsoft, 1996, 1997, 1998, 1999,
//             2000, 2001
// Purpose:   Source file for database loader string functions

```

```

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
// Function name: MakeAddress
//=====
void MakeAddress(char *street_1,
                 char *street_2,
                 char *city,
                 char *state,
                 char *zip)
{
#ifdef DEBUG
    printf("(%ld)DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

    MakeAlphaString(10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString(10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString(10, 20, ADDRESS_LEN, city);
    MakeAlphaString(2, 2, STATE_LEN, state);
    MakeZipNumberString(9, 9, ZIP_LEN, zip);

#ifdef DEBUG
    printf("(%ld)DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state: %s,
           zip: %s\n",
           (int) GetCurrentThreadId(), street_1, street_2, city,
           state, zip);
#endif

    return;
}

//=====
// Function name: LastName
//=====
void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR", "OUGHT", "ABLE", "PRI", "PRES",
        "ESE", "ANTI", "CALLY", "ATION", "EING"
    };

#ifdef DEBUG
    printf("(%ld)DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {

```

```

        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
        else
        {
            printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
            exit(-1);
        }

#ifdef DEBUG
    printf("[%ld]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
           (int) GetCurrentThreadId(), num, num/100, (num/10)%10,
           num%10);
    printf("[%ld]DBG: LastName: String = %s\n",
           (int) GetCurrentThreadId(),
           name);
#endif

    return;
}

//=====
// Function name: MakeAlphaString
//=====
//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
//CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
    "0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("(%ld)DBG: Entering MakeAlphaString()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

```

```

        for (i=0; i<len; i++)
        {
            cc = chArray[RandomNumber(0, chArrayMax)];
            str[i] = cc;
        }
        //if ( len < z )
        //    memset(str+len, ' ', z - len);
        str[len] = 0;

        return len;
    }

//=====================================================================
// Function name: MakeOriginalAlphaString
//
//=====================================================================

int MakeOriginalAlphaString(int x,
                           int y,
                           int z,
                           char *str,
                           int percent)
{
    int         len;
    int         val;
    int         start;

#ifdef DEBUG
    printf("(%ld)DBG: Entering MakeOriginalAlphaString()\n", (int)GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage: %d\n",
               percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if ((x + y) <= 8)
    {
        printf("MakeOriginalAlphaString: string length must be >= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("(%ld)DBG: MakeOriginalAlphaString: : %s\n",

```

```

        (int) GetCurrentThreadId(), str);

#endif
        return strlen(str);
    }

//=====================================================================
// Function name: MakeNumberString
//
//=====================================================================

int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16, 16,
    string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;
    return 16;
}

//=====================================================================
// Function name: MakeZipNumberString
//
//=====================================================================

int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9, 9,
    string)

    strcpy(str, "00001111");
    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====================================================================
// Function name: InitString
//
//=====================================================================

void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("(%ld)DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif
}

```

```

        memset(str, ' ', len);
    str[len] = 0;
}

//=====
// Function name: InitAddress
//
// Description:
//
//=====

void InitAddress(char *street_1, char *street_2, char *city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

```

```

//=====
// Function name: PaddString
//
//=====

void PaddString(int max, char *name)
{
    int             len;

    len = strlen(name);
    if (len < max)
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

tables.sql

```

-- File:      TABLES.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates TPC-C tables

use tpcc
go

-- Remove all existing TPC-C tables

```

```

-- 

if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
if exists ( select name from sysobjects where name = 'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )
    drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
    drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
    drop table stock
go

-- Create new tables
--

create table warehouse
(
    w_id                         smallint,
    w_name                        char(10),
    w_street_1                     char(20),
    w_street_2                     char(20),
    w_city                         char(20),
    w_state                        char(2),
    w_zip                          char(9),
    w_tax                          numeric(4,4),
    w_ytd                          numeric(12,2)
) on MSSQL_misc_fg
go

create table district
(
    d_id                          tinyint,
    d_w_id                         smallint,
    d_name                         char(10),
    d_street_1                      char(20),
    d_street_2                      char(20),
    d_city                          char(20),
    d_state                         char(2),
    d_zip                           char(9),
    d_tax                           numeric(4,4),
    d_ytd                           numeric(12,2),
    d_next_o_id                     int
) on MSSQL_misc_fg
go

```

```

create table customer
(
    c_id                int,
    c_d_id              tinyint,
    c_w_id              smallint,
    c_first             char(16),
    c_middle            char(2),
    c_last              char(16),
    c_street_1           char(20),
    c_street_2           char(20),
    c_city               char(20),
    c_state              char(2),
    c_zip                char(9),
    c_phone              char(16),
    c_since              datetime,
    c_credit             char(2),
    c_credit_lim         numeric(12,2),
    c_discount            numeric(4,4),
    c_balance             numeric(12,2),
    c_ytd_payment        numeric(12,2),
    c_payment_cnt        smallint,
    c_delivery_cnt       smallint,
    c_data                char(500)
) on MSSQL_cs_fg
go

create table history
(
    h_c_id                int,
    h_c_d_id              tinyint,
    h_c_w_id              smallint,
    h_d_id                tinyint,
    h_w_id                smallint,
    h_date                datetime,
    h_amount              numeric(6,2),
    h_data                char(24)
) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id                int,
    no_d_id                tinyint,
    no_w_id                smallint
) on MSSQL_misc_fg
go

create table orders
(
    o_id                int,
    o_d_id              tinyint,
    o_w_id              smallint,
    o_c_id                int,
    o_entry_d            datetime,
    o_carrier_id         tinyint,
    o.ol_cnt             tinyint,
    o.all_local           tinyint
) on MSSQL_misc_fg
go

create table order_line
(

```

```

    ol_o_id                int,
    ol_d_id              tinyint,
    ol_w_id              smallint,
    ol_number             tinyint,
    ol_i_id                int,
    ol_supply_w_id         smallint,
    ol_delivery_d          datetime,
    ol_quantity            smallint,
    ol_amount              numeric(6,2),
    ol_dist_info           char(24)
) on MSSQL_misc_fg
go

create table item
(
    i_id                int,
    i_im_id              int,
    i_name               char(24),
    i_price              numeric(5,2),
    i_data                char(50)
) on MSSQL_misc_fg
go

create table stock
(
    s_i_id                int,
    s_w_id              smallint,
    s_quantity            smallint,
    s_dist_01              char(24),
    s_dist_02              char(24),
    s_dist_03              char(24),
    s_dist_04              char(24),
    s_dist_05              char(24),
    s_dist_06              char(24),
    s_dist_07              char(24),
    s_dist_08              char(24),
    s_dist_09              char(24),
    s_dist_10              char(24),
    s_ytd                int,
    s_order_cnt            smallint,
    s_remote_cnt           smallint,
    s_data                char(50)
) on MSSQL_cs_fg
go

```

time.c

```

//      File:          TIME.C
//                                         Microsoft TPC-C Kit Ver. 4.41
//                                         Copyright Microsoft, 1996, 1997, 1998, 1999,
//                                         2000, 2001
//      Purpose:  Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====

```

```

// Function name: TimeNow
// =====
long TimeNow()
{
    long           time_now;
    struct _timeb el_time;

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

tpcc.h

```

// File:          TPCC.H
//                 Microsoft TPC-C Kit Ver. 4.41
//                 Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001
// Purpose:       Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.41"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

// General constants
#define MILLI          1000
#define FALSE          0
#define TRUE           1
#define UNDEF          -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER         ""

```

```

#define DATABASE          "tpcc"
#define USER              "sa"
#define PASSWORD          ""

// Default loader arguments
#define BATCH             10000
#define DEFLOADPACKSIZE   32768
#define LOADER_RES_FILE   "C:\\MSTPCC.440\\SETUP\\logs\\load.out"
#define LOG_PATH           "C:\\MSTPCC.440\\SETUP\\LOGS\\";
#define LOADER_NURAND_C    123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX        1 // build both
data and indexes
#define INDEX_ORDER        1 // build
indexes before load
#define SCALE_DOWN         0 // build a normal
scale database
#define INDEX_SCRIPT_PATH  "scripts"

typedef struct
{
    char           *server;
    char           *database;
    char           *user;
    char           *password;
    tables_all;
    BOOL           // set if loading all tables
    BOOL           table_item;
    BOOL           // set if loading ITEM table specifically
    BOOL           table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL           table_customer; //
set if loading CUSTOMER and HISTORY
    BOOL           table_orders; //
set if loading NEW-ORDER, ORDERS, ORDER-LINE
    num_warehouses;
    batch;
    verbose;
    pack_size;
    *loader_res_file;
    *log_path;
    *synch_servername;
    case_sensitivity;
    starting_warehouse;
    build_index;
    index_order;
    scale_down;
    *index_script_path;
} TPCCLDR_ARGS;

// String length constants
#define SERVER_NAME_LEN   20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN     20
#define PASSWORD_LEN      20
#define TABLE_NAME_LEN    20
#define I_DATA_LEN         50
#define I_NAME_LEN         24
#define BRAND_LEN          1
#define LAST_NAME_LEN      16
#define W_NAME_LEN         10
#define ADDRESS_LEN        20
#define STATE_LEN          2

```

```

#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OI_NEW_ORDER_ITEMS 15
#define MAX_OI_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

```

tpccldr.c

```

// File: TPCCLDR.C
// Microsoft TPC-C Kit Ver. 4.41
// Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001
// Purpose: Source file for TPC-C database loader

// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS 100000

```

```

#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4

// Functions declarations

void HandleErrorDBC (SQLHDBC hdbc1);

void CheckDataBase();

long NURand();
void LoadItem();
void LoadWarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures

typedef struct
{
    long ol_i_id;
    short ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    char ol_dist_info[DIST_INFO_LEN+1];
    char ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long o_id;
    short o_d_id;
    short o_w_id;
    long o_c_id;
    short o_carrier_id;
    short o.ol_cnt;
} ORDER_STRUCT;

```

```

short          o_all_local;
ORDER_LINE_STRUCT    o_o1[15];
} ORDERS_STRUCT;

typedef struct
{
    long           c_id;
    short          c_d_id;
    short          c_w_id;
    char           c_first[FIRST_NAME_LEN+1];
    char           c_middle[MIDDLE_NAME_LEN+1];
    char           c_last[LAST_NAME_LEN+1];
    char           c_street_1[ADDRESS_LEN+1];
    char           c_street_2[ADDRESS_LEN+1];
    char           c_city[ADDRESS_LEN+1];
    char           c_state[STATE_LEN+1];
    char           c_zip[ZIP_LEN+1];
    char           c_phone[PHONE_LEN+1];
    char           c_credit[CREDIT_LEN+1];
    double         c_credit_lim;
    double         c_discount;
// fix to avoid ODBC float to numeric conversion problem.
// double        c_balance;
// double        c_balance[6];
    char           h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    double         c_ytd_payment;
    short          c_payment_cnt;
    short          c_delivery_cnt;
    char           c_data[C_DATA_LEN+1];
    double         h_amount;
    char           h_data[H_DATA_LEN+1];
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long           c_id;
    char           c_last[LAST_NAME_LEN+1];
    char           c_first[FIRST_NAME_LEN+1];
} LOADER_TIME_STRUCT;

// Global variables

char      szLastError[300];

HENV      henv;                                // for SQL

HDBC      v_hdbc;                             // for SQ
Server version verification
HDBC      i_hdbc1;                            // for ITEM table
HDBC      w_hdbc1;                            // for WAREHOUSE,
DISTRICT, STOCK
HDBC      c_hdbc1;                            // for CUSTOMER
HDBC      c_hdbc2;                            // for HISTORY
HDBC      o_hdbc1;                            // for ORDERS
HDBC      o_hdbc2;                            // for NEW-ORDER

HDBC      o_hdbc3;                            // for ORDER-LINE

```

```

HSTMT      v_hstmt;
version verification
HSTMT      i_hstmt1;
HSTMT      w_hstmt1;
HSTMT      c_hstmt1, c_hstmt2;
HSTMT      o_hstmt1, o_hstmt2, o_hstmt3;

ORDERS_STRUCT orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long          orders_rows_loaded;
long          new_order_rows_loaded;
long          order_line_rows_loaded;
long          history_rows_loaded;
long          customer_rows_loaded;
long          stock_rows_loaded;
long          district_rows_loaded;
long          item_rows_loaded;
long          warehouse_rows_loaded;
long          main_time_start;
long          main_time_end;
long          max_items;
long          customers_per_district;
long          orders_per_district;
long          first_new_order;
long          last_new_order;

TPCCCLDR_ARGS *aptr, args;

//=====
// Function name: main
//=====
int main(int argc, char **argv)
{
    DWORD          dwThreadID[MAX_MAIN_THREADS];
    HANDLE         hThread[MAX_MAIN_THREADS];
    FILE           *fLoader;
    char           buffer[255];
    int            i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****\n");
    printf("\n* Microsoft SQL Server\n");
    printf("\n* TPC-C BENCHMARK KIT: Database loader\n");
    printf("\n* Version %s\n");
    printf("\n* TPCKIT_VER\n");
    printf("\n*****\n\n");

    // process command line arguments

    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    // verify database and tables exist before attempting to load
}

```

```

//CheckDataBase();

printf("Build interface is ODBC.\n");

if (aptr->build_index == 0)
    printf("Data load only - no index creation.\n");
else
    printf("Data load and index creation.\n");

if (aptr->index_order == 0)
    printf("Clustered indexes will be created after bulk load.\n");
else
    printf("Clustered indexes will be created before bulk load.\n");

// set database scale values
if (aptr->scale_down == 1)
{
    printf("**** Scaled Down Database ***\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district = CUSTOMERS_SCALE_DOWN;
    orders_per_district = ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// start loading data
sprintf(buffer, "TPC-C load started for %ld warehouses.\n", aptr->num_warehouses);
printf("%s",buffer);
fprintf(fLoader,"%s",buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads

if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting loader threads for: item\n");
    hThread[0] = CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadItem,
        NULL,
        0,
        &dwThreadID[0]);
    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating thread = 0.\n");
        exit(-1);
    }
    if (aptr->tables_all || aptr->table_warehouse)
    {
        fprintf(fLoader, "Starting loader threads for: warehouse\n");
        hThread[1] = CreateThread(NULL,
            0,
            (LPTHREAD_START_ROUTINE) LoadWarehouse,
            NULL,
            0,
            &dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread = 1.\n");
            exit(-1);
        }
        if (aptr->tables_all || aptr->table_customer)
        {
            fprintf(fLoader, "Starting loader threads for: customer\n");
            hThread[2] = CreateThread(NULL,
                0,
                (LPTHREAD_START_ROUTINE) LoadCustomer,
                NULL,
                0,
                &dwThreadID[2]);
            if (hThread[2] == NULL)
            {
                printf("Error, failed in creating creating main thread = 2.\n");
                exit(-1);
            }
        }
    }
}

```

```

    }

    if (aptr->tables_all || aptr->table_orders)
    {
        fprintf(fLoader, "Starting loader threads for: orders\n");

        hThread[3] = CreateThread(NULL,
                                  0,
                                  (LPTHREAD_START_ROUTINE) LoadOrders,
                                  NULL,
                                  0,
                                  &dwThreadId[3]);

        if (hThread[3] == NULL)
        {
            printf("Error, failed in creating creating main thread
= 3.\n");
            exit(-1);
        }
    }

    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject( hThread[i], INFINITE );
            CloseHandle(hThread[i]);
            hThread[i] = NULL;
        }
    }

    main_time_end = (TimeNow() / MILLI);

    sprintf(buffer,"\\nTPC-C load completed successfully in %ld minutes.\n",
           (main_time_end - main_time_start)/60);

    printf("%s",buffer);
    fprintf(fLoader, "%s", buffer);

    fclose(fLoader);

    SQLFreeEnv(henv);

    exit(0);

    return 0;
}

//=====
// Function name: LoadItem
//=====
void LoadItem()
{
    long          i_id;
    long          i_im_id;

```

```

char          i_name[I_NAME_LEN+1];
double        i_price;
char          i_data[I_DATA_LEN+1];
char          name[20];
long          time_start;
RETCODE       rc;
DBINT         rcint;
char          bcpint[128];
char          err_log_path[256];

// Seed with unique number
seed(1);

printf("Loading item table...\n");

// if build index before load
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxitmcl");

InitString(i_name, I_NAME_LEN+1);
InitString(i_data, I_DATA_LEN+1);

sprintf(name, "%s..%s", aptr->database, "item");

//rc = bcp_init(i_hdbc1, name, NULL, "logs\\item.err", DB_IN);
strcpy(err_log_path,aptr->log_path);
strcat(err_log_path,"item.err");
rc = bcp_init(i_hdbc1, name, NULL, err_log_path , DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcpint, "tablock, order (i_id), ROWS_PER_BATCH =
100000");
    rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcpint);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
}

rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 2);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 3);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 4);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, I_DATA_LEN, NULL, 0, 0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

```

```

time_start = (TimeNow() / MILLI);

item_rows_loaded = 0;

for (i_id = 1; i_id <= max_items; i_id++)
{
    i_im_id = RandomNumber(1L, 10000L);

    MakeAlphaString(14, 24, I_NAME_LEN, i_name);

    i_price = ((float) RandomNumber(100L, 10000L))/100.0;

    MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

    rc = bcp_sendrow(i_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    item_rows_loaded++;
    CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
}

rcint = bcp_done(i_hdbc1);
if (rcint < 0)
    HandleErrorDBC(i_hdbc1);

printf("Finished loading item table.\n");

SQLFreeStmt(i_hstmt1, SQL_DROP);
SQLDisconnect(i_hdbc1);
SQLFreeConnect(i_hdbc1);

// if build index after load
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxitmcl");
}

//=====
// Function : LoadWarehouse
// Loads WAREHOUSE table and loads Stock and District as Warehouses are created
//=====

void LoadWarehouse()
{
    short w_id;
    char w_name[W_NAME_LEN+1];
    char w_street_1[ADDRESS_LEN+1];
    char w_street_2[ADDRESS_LEN+1];
    char w_city[ADDRESS_LEN+1];
    char w_state[STATE_LEN+1];
    char w_zip[ZIP_LEN+1];
    double w_tax;
    double w_ytd;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcint;
}

```

```

char      bcphint[128];
char      err_log_path[256];

// Seed with unique number
seed(2);

printf("Loading warehouse table...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxwarcl");

InitString(w_name, W_NAME_LEN+1);
InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

sprintf(name, "%s..%s", aptr->database, "warehouse");

//rc = bcp_init(w_hdbc1, name, NULL, "logs\\whouse.err", DB_IN);
strncpy(err_log_path,aptr->log_path);
strcat(err_log_path,"whouse.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (w_id), ROWS_PER_BATCH = %d",
aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0, 2);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

3;
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

4;
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

```

```

        rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 8);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 9);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        time_start = (TimeNow() / MILLI);

        warehouse_rows_loaded = 0;

        for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
    {
        MakeAlphaString(6,10, W_NAME_LEN, w_name);

        MakeAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

        w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        w_ytd = 300000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        warehouse_rows_loaded++;
        CheckForCommit(w_hdbc1, i_hstml, warehouse_rows_loaded,
"warehouse", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading warehouse table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxwarcl");

    stock_rows_loaded = 0;
    district_rows_loaded = 0;

    District();
    Stock();
}

//=====
// Function : District
//=====
void District()
{
    short d_id;

```

```

    short d_w_id;
    char d_name[D_NAME_LEN+1];
    char d_street_1[ADDRESS_LEN+1];
    char d_street_2[ADDRESS_LEN+1];
    char d_city[ADDRESS_LEN+1];
    char d_state[STATE_LEN+1];
    char d_zip[ZIP_LEN+1];
    double d_tax;
    double d_ytd;
    char name[20];
    long d_next_o_id;
    long time_start;
    int w_id;
    RETCODE rc;
    DBINT rcount;
    char bcphint[128];
    char err_log_path[256];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
    sprintf(name, "%s..%s", aptr->database, "district");

    //rc = bcp_init(w_hdbc1, name, NULL, "logs\\district.err", DB_IN);
    strcpy(err_log_path,aptr->log_path);
    strcat(err_log_path,"district.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (d_w_id, d_id), ROWS_PER_BATCH
= %u", (aptr->num_warehouses * 10));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
4);

```

```

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
5);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, 8);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 9);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 10);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 11);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

d_ytd = 30000.0;

d_next_o_id = orders_per_district+1;

time_start = (TimeNow() / MILLI);

for (w_id = aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    d_w_id = w_id;

    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        MakeAlphaString(6,10,D_NAME_LEN, d_name);

        MakeAddress(d_street_1, d_street_2, d_city, d_state,
d_zip);

        d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
    }
}

}
rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading district table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxdiscl");

return;
}

=====
//
// Function : Stock
//
=====

void Stock()
{
    long s_i_id;
    short s_w_id;
    short s_quantity;
    char s_dist_01[S_DIST_LEN+1];
    char s_dist_02[S_DIST_LEN+1];
    char s_dist_03[S_DIST_LEN+1];
    char s_dist_04[S_DIST_LEN+1];
    char s_dist_05[S_DIST_LEN+1];
    char s_dist_06[S_DIST_LEN+1];
    char s_dist_07[S_DIST_LEN+1];
    char s_dist_08[S_DIST_LEN+1];
    char s_dist_09[S_DIST_LEN+1];
    char s_dist_10[S_DIST_LEN+1];
    long s_ytd;
    short s_order_cnt;
    short s_remote_cnt;
    char s_data[S_DATA_LEN+1];
    short len;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcount;
    char bcpinit[128];
    char err_log_path[256];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxstkcl");

    sprintf(name, "%s..%s", aptr->database, "stock");

    //rc = bcp_init(w_hdbc1, name, NULL, "logs\\stock.err", DB_IN);
    strcpy(err_log_path,aptr->log_path);
    strcat(err_log_path,"stock.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (%s_i_id, %s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
        rc = bcp_control(w_hdbc1, BCPIHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0, 0, 4);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0, 0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0, 0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0, 0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0, 0, 8);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0, 0, 9);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0, 0, 10);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0, 0, 11);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0, 0, 12);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0, 0, 13);

```

```

        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 14);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 15);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 16);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, S_DATA_LEN, NULL, 0, 0, 17);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

        s_ytd = s_order_cnt = s_remote_cnt = 0;
        time_start = (TimeNow() / MILLI);

        printf("...Loading stock table\n");
        for (s_i_id=1; s_i_id <= max_items; s_i_id++)
        {
            for (s_w_id = (short)aptr->starting_warehouse; s_w_id <= aptr-
>num_warehouses; s_w_id++)
            {

                s_quantity = (short)RandomNumber(10L,100L);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
                len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);

                len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

                rc = bcp_sendrow(w_hdbc1);
                if (rc != SUCCEED)
                    HandleErrorDBC(w_hdbc1);

                stock_rows_loaded++;
                CheckForCommit(w_hdbc1, w_hstml, stock_rows_loaded,
"stock", &time_start);
            }
        }

        rcint = bcp_done(w_hdbc1);
        if (rcint < 0)

```

```

        HandleErrorDBC(w_hdbc1);

printf("Finished loading stock table.\n");

SQLFreeStmt(w_hstmt1, SQL_DROP);
SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");

return;
}

//=====
// Function : LoadCustomer
//=====

void LoadCustomer()
{
    LOADER_TIME_STRUCT    customer_time_start;
    LOADER_TIME_STRUCT    history_time_start;
    short                 w_id;
    short                 d_id;
    DWORD                dwThreadID[MAX_CUSTOMER_THREADS];
    HANDLE               hThread[MAX_CUSTOMER_THREADS];
    char                 name[20];
    RETCODE               rc;
    DBINT                rcount;
    char                 bcphint[128];
    char                 cmd[256];
    int                  num_procs;
    char                 err_log_path_cust[256];
    char                 err_log_path_hist[256];
    char                 rc_l;
    recnum, MsgLen;
    SqlState[6],
    Msg[SQL_MAX_MESSAGE_LENGTH];
    // SQLINTEGER           NativeError;

    // Seed with unique number
    seed(5);

    printf("Loading customer and history tables...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxcuscl");
        // check the number of processors on this system
        // if 8 or more processors, then build index on History.
        // if less than 8 processors, do not build the index
        num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
        if ( num_procs >= 8 )
            BuildIndex("idxhiscl");
    }

    // Initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "customer");
}

```

```

//rc = bcp_init(c_hdbc1, name, NULL, "logs\\customer.err", DB_IN);
strcpy(err_log_path_cust,aptr->log_path);
strcat(err_log_path_cust,"customer.err");
rc = bcp_init(c_hdbc1, name, NULL, err_log_path_cust, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    sprintf(name, "%s..%s", aptr->database, "history");

    rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
strcpy(err_log_path_hist,aptr->log_path);
strcat(err_log_path_hist,"history.err");
rc = bcp_init(c_hdbc2, name, NULL, err_log_path_hist, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

sprintf(bcphint, "tablock");
rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

customer_rows_loaded      = 0;
history_rows_loaded       = 0;

CustomerBufInit();

customer_time_start.time_start = (TimeNow() / MILLI);
history_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id, w_id);

        // Start parallel loading threads here...

        // Start customer table thread
        printf("...Loading customer table for: d_id = %d, w_id
= %d\n", d_id, w_id);
        hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
0,

```

```

&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
                printf("Error, failed in creating creating
thread = 0.\n");
                exit(-1);
        }

        // Start History table thread

        printf("...Loading history table for: d_id = %d, w_id
= %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadHistoryTable,
        &history_time_start,
        0,
        &dwThreadID[1]);

        if (hThread[1] == NULL)
        {
                printf("Error, failed in creating creating
thread = 1.\n");
                exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)
        {
                printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
                printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
        }

    }

}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
{
    BuildIndex("idxcuscl");
    // check the number of processors on this system
    // if 8 or more processors, then build index on History.
    // if less than 8 processors, do not build the index
    num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
    if (num_procs >= 8)
        BuildIndex("idxhiscl");
}

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID = 1,
// C_W_ID = 1, and C_D_ID = 1
//sprintf(cmd, "osql -S%s -U%s -P%s -d%s -e -Q\"update customer set
c_first = 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" >
logs\\nurand_load.log",
        sprintf(cmd, "osql -S%s -U%s -P%s -d%s -e -Q\"update customer set c_first
= 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" > %snurand_load.log",
        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database,
        LOADER_NURAND_C,
        aptr->log_path);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====================================================================
//
// Function : CustomerBufInit
//
//=====================================================================

void CustomerBufInit()
{
    int      i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;
    }
}

```

```

strcpy(customer_buf[i].c_first,"");
strcpy(customer_buf[i].c_middle,"");
strcpy(customer_buf[i].c_last,"");
strcpy(customer_buf[i].c_street_1,"");
strcpy(customer_buf[i].c_street_2,"");
strcpy(customer_buf[i].c_city,"");
strcpy(customer_buf[i].c_state,"");
strcpy(customer_buf[i].c_zip,"");
strcpy(customer_buf[i].c_phone,"");
strcpy(customer_buf[i].c_credit,"");

customer_buf[i].c_credit_lim = 0;
customer_buf[i].c_discount = (float) 0;

// fix to avoid ODBC float to numeric conversion problem.
// customer_buf[i].c_balance = 0;
strcpy(customer_buf[i].c_balance,"");

customer_buf[i].c_ytd_payment = 0;
customer_buf[i].c_payment_cnt = 0;
customer_buf[i].c_delivery_cnt = 0;

strcpy(customer_buf[i].c_data,"");
customer_buf[i].h_amount = 0;
strcpy(customer_buf[i].h_data,"");

}

}

//=====
// Function : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====

void CustomerBufLoad(int d_id, int w_id)
{
    long i;
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

        MakeAlphaString(8,16,FIRST_NAME_LEN, c[i].c_first);
        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
10000.0;
d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;

        customer_buf[i].c_ytd_payment = 10.0;
        customer_buf[i].c_payment_cnt = 1;
        customer_buf[i].c_delivery_cnt = 0;

        // Generate CUSTOMER and HISTORY data
        customer_buf[i].c_id = c[i].c_id;

        strcpy(customer_buf[i].c_first, c[i].c_first);
        strcpy(customer_buf[i].c_last, c[i].c_last);

        customer_buf[i].c_middle[0] = 'O';
        customer_buf[i].c_middle[1] = 'E';

        MakeAddress(customer_buf[i].c_street_1,
                    customer_buf[i].c_street_2,
                    customer_buf[i].c_city,
                    customer_buf[i].c_state,
                    customer_buf[i].c_zip);

        MakeNumberString(16, 16, PHONE_LEN, customer_buf[i].c_phone);

        if (RandomNumber(1L, 100L) > 10)
            customer_buf[i].c_credit[0] = 'G';
        else
            customer_buf[i].c_credit[0] = 'B';
        customer_buf[i].c_credit[1] = 'C';

        customer_buf[i].c_credit_lim = 50000.0;
        customer_buf[i].c_discount = ((float) RandomNumber(0L, 5000L)) / 10000.0;

        // fix to avoid ODBC float to numeric conversion problem.

        // customer_buf[i].c_balance = -10.0;
        strcpy(customer_buf[i].c_balance,"-10.0");

        MakeAlphaString(300, 500, C_DATA_LEN, customer_buf[i].c_data);

        // Generate HISTORY data
        MakeAlphaString(12, 24, H_DATA_LEN, customer_buf[i].h_data);
    }
}

//=====
// Function : LoadCustomerTable
//
//=====

void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)

```

```

{
    int      i;
    long     c_id;
    short    c_d_id;
    short    c_w_id;
    char     c_first[FIRST_NAME_LEN+1];
    char     c_middle[MIDDLE_NAME_LEN+1];
    char     c_last[LAST_NAME_LEN+1];
    char     c_street_1[ADDRESS_LEN+1];
    char     c_street_2[ADDRESS_LEN+1];
    char     c_city[ADDRESS_LEN+1];
    char     c_state[STATE_LEN+1];
    char     c_zip[ZIP_LEN+1];
    char     c_phone[PHONE_LEN+1];
    char     c_credit[CREDIT_LEN+1];
    double   c_credit_lim;
    double   c_discount;

    // fix to avoid ODBC float to numeric conversion problem.
    // double      c_balance;
    char     c_balance[6];

    double   c_ytd_payment;
    short    c_payment_cnt;
    short    c_delivery_cnt;
    char     c_data[C_DATA_LEN+1];
    char     c_since[C_SINCE_LEN+1];
    RETCODE  rc;

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
}

```

```

rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, 9);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, 10);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, 11);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, 12);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, 13);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0, 14);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 15);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 16);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

// fix to avoid ODBC float to numeric conversion problem.

// rc = bcp_bind(c_hdbc1, (BYTE *) &c_balance, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 17);
// if (rc != SUCCEED)
//     HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, 17);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 18);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 19);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 20);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500, NULL, 0, 0, 21);

```

```

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;

    strcpy(c_first, customer_buf[i].c_first);
    strcpy(c_middle, customer_buf[i].c_middle);
    strcpy(c_last, customer_buf[i].c_last);
    strcpy(c_street_1, customer_buf[i].c_street_1);
    strcpy(c_street_2, customer_buf[i].c_street_2);
    strcpy(c_city, customer_buf[i].c_city);
    strcpy(c_state, customer_buf[i].c_state);
    strcpy(c_zip, customer_buf[i].c_zip);
    strcpy(c_phone, customer_buf[i].c_phone);
    strcpy(c_credit, customer_buf[i].c_credit);

    FormatDate(&c_since);

    c_credit_lim = customer_buf[i].c_credit_lim;
    c_discount = customer_buf[i].c_discount;

    // fix to avoid ODBC float to numeric conversion problem.

    // c_balance = customer_buf[i].c_balance;
    strcpy(c_balance, customer_buf[i].c_balance);

    c_ytd_payment = customer_buf[i].c_ytd_payment;
    c_payment_cnt = customer_buf[i].c_payment_cnt;
    c_delivery_cnt = customer_buf[i].c_delivery_cnt;

    strcpy(c_data, customer_buf[i].c_data);

    // Send data to server
    rc = bcp_sendrow(c_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    customer_rows_loaded++;
    CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
}

//=====
// Function : LoadHistoryTable
//=====
void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    int i;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;

    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
5);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
7);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);

        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
    }
}

```

```

//=====
// Function : LoadOrders
//=====

void LoadOrders()
{
    LOADER_TIME_STRUCT      orders_time_start;
    LOADER_TIME_STRUCT      new_order_time_start;
    LOADER_TIME_STRUCT      order_line_time_start;
    short                   w_id;
    short                   d_id;
    DWORD                  dwThreadId[MAX_ORDER_THREADS];
    HANDLE                 hThread[MAX_ORDER_THREADS];
    char                   name[20];
    RETCODE                rc;
    char                   bcpHint[128];
    char                   err_log_path_ord[256];
    char                   err_log_path_nord[256];
    char                   err_log_path_ordl[256];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordcl");
        BuildIndex("idxnodcl");
        BuildIndex("idxodlcl");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    strcpy(err_log_path_ord, aptr->log_path);
    strcat(err_log_path_ord, "orders.err");
    rc = bcp_init(o_hdbc1, name, NULL, err_log_path_ord, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcpHint, "tablock, order (%o_w_id, %o_d_id, %o_id),
ROWS_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcpHint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "new_order");

    rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
    strcpy(err_log_path_nord, aptr->log_path);
    strcat(err_log_path_nord, "neword.err");
    rc = bcp_init(o_hdbc2, name, NULL, err_log_path_nord, DB_IN);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(o_hdbc2);

        if ((aptr->build_index == 1) && (aptr->index_order == 1))
        {
            sprintf(bcpHint, "tablock, order (%o_w_id, %o_d_id, %o_id),
ROWS_BATCH = %u", (aptr->num_warehouses * 9000));
            rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcpHint);
            if (rc != SUCCEED)
                HandleErrorDBC(o_hdbc2);
        }

        sprintf(name, "%s..%s", aptr->database, "order_line");

        rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
        strcpy(err_log_path_ordl, aptr->log_path);
        strcat(err_log_path_ordl, "ordline.err");
        rc = bcp_init(o_hdbc3, name, NULL, err_log_path_ordl, DB_IN);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        if ((aptr->build_index == 1) && (aptr->index_order == 1))
        {
            sprintf(bcpHint, "tablock, order (%ol_w_id, %ol_d_id, %ol_o_id),
ol_number), ROWS_BATCH = %u", (aptr->num_warehouses * 300000));
            rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcpHint);
            if (rc != SUCCEED)
                HandleErrorDBC(o_hdbc3);
        }

        orders_rows_loaded      = 0;
        new_order_rows_loaded   = 0;
        order_line_rows_loaded = 0;

        OrdersBufInit();

        orders_time_start.time_start = (TimeNow() / MILLI);
        new_order_time_start.time_start = (TimeNow() / MILLI);
        order_line_time_start.time_start = (TimeNow() / MILLI);

        for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
        {
            for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
            {
                OrdersBufLoad(d_id, w_id);

                // start parallel loading threads here...

                // start Orders table thread
                printf("...Loading Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);
                hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrdersTable,
&orders_time_start,
0,

```

```

&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // start NewOrder table thread
        printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadNewOrderTable,
        &new_order_time_start,
        0,
        &dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        // start Order-Line table thread
        printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[2] = CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadOrderLineTable,
        &order_line_time_start,
        0,
        &dwThreadID[2]);

        if (hThread[2] == NULL)
        {
            printf("Error, failed in creating creating
thread = 2.\n");
            exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );
        WaitForSingleObject( hThread[2], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)

```

```

        {
            printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[2]) == FALSE)
        {
            printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
        }

    }

    printf("Finished loading orders.\n");

    return;
}

//=====
// Function  : OrdersBufInit
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//=====

void OrdersBufInit()
{
    int      i;
    int      j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o.ol_cnt = 0;
        orders_buf[i].o.all_local = 0;

        for (j=0;j<14;j++)
        {
            orders_buf[i].o.ol[j].ol = 0;
            orders_buf[i].o.ol[j].ol_i_id = 0;
            orders_buf[i].o.ol[j].ol_supply_w_id = 0;
            orders_buf[i].o.ol[j].ol_quantity = 0;
            orders_buf[i].o.ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o.ol[j].ol_dist_info,"");
        }
    }
}

```

```

//=====
// Function  : OrdersBufLoad
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
// =====
void OrdersBufLoad(int d_id, int w_id)
{
    int      cust[ORDERS_PER_DISTRICT+1];
    long     o_id;
    short    ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data

        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
        orders_buf[o_id].o_c_id = cust[o_id+1];
        orders_buf[o_id].o.ol_cnt = (short)RandomNumber(5L, 15L);

        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);          orders_buf[o_id].o_all_local  = 1;
        }
        else
        {
            orders_buf[o_id].o_carrier_id = 0;
            orders_buf[o_id].o_all_local  = 1;
        }

        for (ol=0; ol<orders_buf[o_id].o.ol_cnt; ol++)
        {

            orders_buf[o_id].o.ol[ol].ol = ol+1;
            orders_buf[o_id].o.ol[ol].ol_i_id = RandomNumber(1L,
max_items);
            orders_buf[o_id].o.ol[ol].ol_supply_w_id = w_id;
            orders_buf[o_id].o.ol[ol].ol_quantity = 5;
            MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o.ol[ol].ol_dist_info);

            // Generate ORDER-LINE data
            if (o_id < first_new_order)
            {
                orders_buf[o_id].o.ol[ol].ol_amount = 0;
                // Added to insure ol_delivery_d set
properly during load
        }
    }
}

```

```

FormatDate(&orders_buf[o_id].o.ol[ol].ol_delivery_d);

        }
        else
        {
            orders_buf[o_id].o.ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
            // Added to insure ol_delivery_d set
properly during load
        }
    }

    // odbc datetime format
    strcpy(orders_buf[o_id].o.ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
}

}

//=====
// Function  : LoadOrdersTable
// =====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int      i;
    long     o_id;
    short    o_d_id;
    short    o_w_id;
    long     o_c_id;
    short    o_carrier_id;
    short    o.ol_cnt;
    short    o_all_local;
    char     o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE   rc;
    DBINT    rcint;

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN, NULL, 0,
SQLCHARACTER, 5);
}

```

```

if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

rc = bcp_bind(o_hdbc1, (BYTE *) &o.ol_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
7);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

rc = bcp_bind(o_hdbc1, (BYTE *) &o.all_local, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

for (i = 0; i < orders_per_district; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;
    o_c_id    = orders_buf[i].o_c_id;
    o_carrier_id = orders_buf[i].o_carrier_id;
    o.ol_cnt  = orders_buf[i].o.ol_cnt;
    o.all_local = orders_buf[i].o.all_local;

    FormatDate(&o_entry_d);

    // send data to server
    rc = bcp_sendrow(o_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    orders_rows_loaded++;
    CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded, "orders",
&orders_time_start->time_start);
}

// rcount = bcp_batch(o_hdbc1);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc1);

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcount = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxordcl");

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxordnc");
}

```

```

}

//=====
// Function : LoadNewOrderTable
//=====

void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    int         i;
    long        o_id;
    short       o_d_id;
    short       o_w_id;
    RETCODE     rc;
    DBINT      rcint;

    // Bind NEW-ORDER data

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;
        CheckForCommit(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
    }

    // rcount = bcp_batch(o_hdbc2);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc2);

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcount = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);
    }
}

```

```

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxnodcl");
}

//=====
// Function : LoadOrderLineTable
//=====
void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    int          i,j;
    long         o_id;
    short        o_d_id;
    short        o_w_id;
    long         ol;
    long         ol_i_id;
    short        ol_supply_w_id;
    short        ol_quantity;
    double       ol_amount;
    char         ol_dist_info[DIST_INFO_LEN+1];
    char         ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE      rc;
    DBINT        rcint;

    // bind ORDER-LINE data
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0, OL_DELIVERY_D_LEN,
NULL, 0, SQLCHARACTER, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        for (j=0; j < orders_buf[i].o.ol_cnt; j++)
        {
            ol           = orders_buf[i].o.ol[j].ol;
            ol_i_id     = orders_buf[i].o.ol[j].ol_i_id;
            ol_supply_w_id = orders_buf[i].o.ol[j].ol_supply_w_id;
            ol_quantity   = orders_buf[i].o.ol[j].ol_quantity;
            ol_amount     = orders_buf[i].o.ol[j].ol_amount;

            strcpy(ol_delivery_d,orders_buf[i].o.ol[j].ol_delivery_d);

            strcpy(ol_dist_info,orders_buf[i].o.ol[j].ol_dist_info);

            rc = bcp_sendrow(o_hdbc3);
            if (rc != SUCCEED)
                HandleErrorDBC(o_hdbc3);

            order_line_rows_loaded++;
            CheckForCommit(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
        }
    }

    // rcint = bcp_batch(o_hdbc3);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc3);

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc3);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc3);

        SQLFreeStmt(o_hstmt3, SQL_DROP);
        SQLDisconnect(o_hdbc3);
        SQLFreeConnect(o_hdbc3);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            HandleErrorDBC(o_hdbc3);
    }
}

```

```

        BuildIndex("idxodlcl");
    }

}

//=====
// Function : GetPermutation
// =====
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
// Function : CheckForCommit
// =====
void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    int rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long time_end, time_diff;
    // DBINT rcint;

    if ( !(rows_loaded % aptr->batch) )
    {
        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d (%.2f
rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff
               : 1L));
        *time_start = time_end;
    }
    return;
}

//=====
// Function : OpenConnections
// =====
void OpenConnections()
{
    RETCODE rc;
    char szDriverString[300];
    char szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connections to SQL Server
    // Connection 1

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );
}

```

```

rc = SQLSetConnectOption ( i_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

rc = SQLDriverConnect ( i_hdbc1,
                       NULL,
                       (SQLCHAR*)&szDriverString[0] ,
                           SQL_NTS,
                       (SQLCHAR*)&szDriverStringOut[0],
                           sizeof(szDriverStringOut),
                           &cbDriverStringOut,
                           SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

// Connection 2

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
           aptr->server,
           aptr->user,
           aptr->password,
           aptr->database );

rc = SQLSetConnectOption ( w_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = SQLDriverConnect ( w_hdbc1,
                       NULL,
                       (SQLCHAR*)&szDriverString[0] ,
                           SQL_NTS,
                       (SQLCHAR*)&szDriverStringOut[0],
                           sizeof(szDriverStringOut),
                           &cbDriverStringOut,
                           SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

// Connection 3

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
           aptr->server,
           aptr->user,
           aptr->password,
           aptr->database );

rc = SQLSetConnectOption ( c_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = SQLDriverConnect ( c_hdbc1,
                       NULL,
                           (SQLCHAR*)&szDriverString[0] ,
                           SQL_NTS,
                           (SQLCHAR*)&szDriverStringOut[0],
                           sizeof(szDriverStringOut),
                           &cbDriverStringOut,
                           SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

// Connection 4

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
           aptr->server,
           aptr->user,
           aptr->password,
           aptr->database );

rc = SQLSetConnectOption ( c_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
                       NULL,
                       (SQLCHAR*)&szDriverString[0] ,
                           SQL_NTS,
                       (SQLCHAR*)&szDriverStringOut[0],
                           sizeof(szDriverStringOut),
                           &cbDriverStringOut,
                           SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

// Connection 5

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
           aptr->server,
           aptr->user,
           aptr->password,
           aptr->database );

rc = SQLSetConnectOption ( o_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
                       NULL,
                       (SQLCHAR*)&szDriverString[0] ,
                           SQL_NTS,
                           (SQLCHAR*)&szDriverStringOut[0],
                           sizeof(szDriverStringOut),
                           &cbDriverStringOut,
                           SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

```

```

        sizeof(szDriverStringOut),
        &cbDriverStringOut,
        SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

// Connection 6

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
                       NULL,
                       (SQLCHAR*)&szDriverString[0] ,
                       SQL_NTS,
                       (SQLCHAR*)&szDriverStringOut[0],
                       sizeof(szDriverStringOut),
                       &cbDriverStringOut,
                       SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

// Connection 7

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
                       NULL,
                       (SQLCHAR*)&szDriverString[0] ,
                       SQL_NTS,
                       (SQLCHAR*)&szDriverStringOut[0],
                       sizeof(szDriverStringOut),
                       &cbDriverStringOut,

```

```

        SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

}

//=====================================================================
// Function name: BuildIndex
//
//=====================================================================

void BuildIndex(char          *index_script)
{
    char      cmd[256];

    printf("Starting index creation: %s\n",index_script);

    sprintf(cmd, "osql -S%s -U%s -P%s -e -i%s\\%s.sql > %s%s.log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->index_script_path,
            index_script,
            aptr->log_path,
            index_script);

    system(cmd);

    printf("Finished index creation: %s\n",index_script);
}

void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER       NativeError;
    SQLSMALLINT     i, MsgLen;
    SQLRETURN        rc2;
    char             timebuf[128];
    char             datebuf[128];
    char             err_log_path[256];
    FILE             *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
&NativeError,
                                Msg, sizeof(Msg) , &MsgLen ) !=

SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );
        _strftime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"w");

```

```

//fp1 = fopen("logs\\tpccldr.err","w");
if (fp1 == NULL)
    printf("ERROR: Unable to open errorlog file.\n");
else
{
    fprintf(fp1, "[%s : %s] %s\n" , datebuf, timebuf,
szLastError);
    fclose(fp1);
}
i++;
}

void HandleErrorSTMT (HSTMT hstmt1)
{
    SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER        NativeError;
    SQLSMALLINT      i, MsgLen;
    SQLRETURN         rc2;
    char              timebuf[128];
    char              datebuf[128];
    char              err_log_path[256];
    FILE             *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
&NativeError,
                                Msg, sizeof(Msg) , &MsgLen )) !=
SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );
        _strtime(timebuf);
        _strdate(datebuf);
        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"w");
//fp1 = fopen("logs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
{
    fprintf(fp1, "[%s : %s] %s\n" , datebuf, timebuf,
szLastError);
    fclose(fp1);
}
i++;
}

void FormatDate ( char* szTimeCOutput )
{
}

struct tm when;
time_t now;

time( &now );
when = *localtime( &now );

mktime( &when );

// odbc datetime format
strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000" , &when );

return;
}

//=====================================================================
// Function  : CheckDataBase
//=====================================================================

void CheckDataBase()
{
    RETCODE          rc;
    char             szDriverString[300];
    char             szDriverStringOut[1024];
    char             TablesBitMap[9] = {"000000000"};
    int              i, ExitFlag;

    SQLSMALLINT      cbDriverStringOut;
    SQLCHAR          TabName[10];
    SQLINTEGER        TabNameInd, TabCount, TabCountInd;

    ExitFlag = 0;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &v_hdbc);

    SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connection to SQL Server

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE, (SQLPOINTER)aptr-
>pack_size, SQL_IS_UINT32 );
    if (rc != SQL_SUCCESS)
        HandleErrorDBC(v_hdbc);

    rc = SQLDriverConnect ( v_hdbc,
NULL,

```

```

(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

// if the rc is SQL_ERROR, the the TPCC database probably does not exist
if (rc == SQL_ERROR)
{
    printf("The database TPCC does not appear to exist!\n");
    printf("\nCheck LOGS\\ directory for database creation
errors.\n");

    // cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    // since there is not a database, exit back to SETUP.CMD
exit(1);
}

if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt) != SQL_SUCCESS )
    HandleErrorDBC(v_hdbc);

if ( SQLBindCol(v_hstmt, 1, SQL_C_ULONG, &TabCount, 0, &TabCountInd) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// count the number of user tables from sysobjects
rc = SQLExecDirect(v_hstmt, "select count(*) from sysobjects where xtype =
'\u00' ", SQL_NTS);
if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
    HandleErrorSTMT(v_hstmt);

if ( SQLFetch(v_hstmt) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// if the number of tables is less than 9, select all the user tables in
TPCC
if (TabCount != 9)
{
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);

    SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt);

    if ( SQLBindCol(v_hstmt, 1, SQL_C_CHAR, &TabName,
sizeof(TabName), &TabNameInd) != SQL_SUCCESS )
        HandleErrorSTMT(v_hstmt);

    // select the list of user tables into a result set
    rc = SQLExecDirect(v_hstmt, "select * from sysobjects where
xtype = '\u00' ", SQL_NTS);
    if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
        HandleErrorSTMT(v_hstmt);

    // go through the result set and set the bitmap for each found
table
    // set the bitmap to '1' if the table name is found

```

```

while ((rc = SQLFetch(v_hstmt)) != SQL_NO_DATA)
{
    switch( TabName[0] )
    {
        case 'w':
            TablesBitMap[0] = '1';
            break;
        case 'd':
            TablesBitMap[1] = '1';
            break;
        case 'c':
            TablesBitMap[2] = '1';
            break;
        case 'h':
            TablesBitMap[3] = '1';
            break;
        case 'n':
            TablesBitMap[4] = '1';
            break;
        case 'o':
            if (TabName[5] == 's')
                TablesBitMap[5] = '1';
            if (TabName[5] == '_')
                TablesBitMap[6] = '1';
            break;
        case 'i':
            TablesBitMap[7] = '1';
            break;
        case 's':
            TablesBitMap[8] = '1';
            break;
    }

    // a '0' ExitFlag means do NOT exit the loader early, a '1'
means exit the loader early
    ExitFlag = 0;

    // iterate through the bitmap to display which table(s) is
actually missing
    for (i = 0; i <= 8; i++)
    {
        switch(i)
        {
            case 0:
                if (TablesBitMap[i] == '0')
                {
                    printf("The Warehouse table is
missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
            case 1:
                if (TablesBitMap[i] == '0')
                {
                    printf("The District table is
missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
            case 2:
                if (TablesBitMap[i] == '0')

```

```

        {
            printf("The Customer table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 3:
        if (TablesBitMap[i] == '0')
        {
            printf("The History table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 4:
        if (TablesBitMap[i] == '0')
        {
            printf("The New_Order table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 5:
        if (TablesBitMap[i] == '0')
        {
            printf("The Orders table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 6:
        if (TablesBitMap[i] == '0')
        {
            printf("The Order_Line table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 7:
        if (TablesBitMap[i] == '0')
        {
            printf("The Item table is missing
or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 8:
        if (TablesBitMap[i] == '0')
        {
            printf("The Stock table is missing
or damaged.\n");
            ExitFlag = 1;
        }
        break;
    }

    // if one or more tables are missing, display message and exit
the loader
if (ExitFlag = 1)
{
    printf("\nExiting TPC-C Loader!\n");
    printf("\nCheck LOGS\\ directory for database\n");
}

```

```

printf("or table creation errors.\n");

// cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

exit(1);
}

// cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

return;
}

```

version.sql

```

-- File:      VERSION.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Returns version level of TPC-C stored procs
-- Note:      Always update the return value of this proc for
--           any interface changes or 'must have' bug fixes.

-- The value returned by this SP defines the 'interface level',
-- which must match between the stored procs and the client code.
-- The interface level may be down rev from the current kit. This
-- indicates that the interface hasn't changed since that version.

use tpcc
go

if exists ( select name from sysobjects where name = 'tpcc_version' )
    drop procedure tpcc_version
go

create proc tpcc_version
as
declare  @version  char(8)

begin
    select @version = '4.10.000'
    select @version as 'Version'
end
go

```

Appendix C: Tunable Parameters

Microsoft SQL Server 2000 Startup Parameters

```
C:\Program Files\Microsoft SQL Server\MSSQL\BINN\sqlservr.exe
-eC:\Program Files\Microsoft SQL Server\MSSQL\LOG\ERRORLOG -x -c -t3502 -g100

Where:
-c      Start SQL Server independently of the
Windows NT Service Control Manager
-x      Disables the keeping of CPU time and cache-
hit ratio statistics
-t3502  Prints a message to the SQL Server log at the
start and end of each checkpoint
-g100   Specify the amount of virtual address space
in MB, SQL Server will leave available for memory
allocations, excluding the buffer pool and threads
stack, such as dynamically-loaded DLLs, extended
procedure calls, etc. Incorrect use of this option
can lead to conditions under which SQL Server may not
start or may encounter runtime errors.
```

Boot.ini Parameters

```
[boot loader]
timeout=10
default=multi(0)disk(0)rdisk(0)partition(1)\WINDOWS
[operating systems]
multi(0)disk(0)rdisk(0)partition(1)\WINDOWS="Windows
Server 2003, Enterprise [PAE]" /fastdetect /pae
multi(0)disk(0)rdisk(0)partition(1)\WINDOWS="Windows
Server 2003, Enterprise" /fastdetect
```

Microsoft SQL Server 2000 Configuration Parameters

```
1> 2> 3> 4> 5> 6> 7> 8> -- File:      VERSION.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.41
--          Copyright Microsoft, 2001
-- Purpose: Extracts current version of SQL Server

use master
1> 2> 3>
SELECT    CONVERT(char(20),
SERVERPROPERTY('ProductVersion'))

-----
8.00.761

(1 row affected)
1> 2> 3>
SELECT    CONVERT(char(20),
SERVERPROPERTY('ProductLevel'))

-----
SP3

(1 row affected)
1> 2> 3>
SELECT    CONVERT(char(30), getdate(),9)

-----
May  2 2003 11:56:57:877AM

(1 row affected)
1> 2> 3> 4> 5>

1> 2> 3> 4> 5> 6> 7> 8> 9> 10>
-- File:      CONFIG.SQL
--          Microsoft TPC-C Benchmark Kit Ver. 4.41
--          Copyright Microsoft, 2001
-- Purpose: Collects SQL Server configuration
parameters

PRINT      " "
SELECT    convert(char(30), getdate(),9)
PRINT      " "

-----
May  2 2003 11:56:58:203AM

(1 row affected)
```

1> 2> 3> DBCC execution completed. If DBCC printed error messages, contact your system administrator. Configuration option 'show advanced options' changed from 1 to 1. Run the RECONFIGURE statement to install.

```
sp_configure "show advanced",1
1> 2> reconfigure with override
1> 2> sp_configure
name                                     minimum
maximum        config_value run_value
-----  -----
affinity mask                           -2147483648
2147483647           15            15
allow updates                          0
1             0            0
awe enabled                            0
1             1            1
c2 audit mode                         0
1             0            0
cost threshold for parallelism       0
32767           5            5
Cross DB Ownership Chaining          0
1             0            0
cursor threshold                      -1
2147483647           -1            -1
default full-text language           0
2147483647           1033          1033
default language                      0
9999           0            0
fill factor (%)                      0
100            0            0
index create memory (KB)             704
2147483647           0            0
lightweight pooling                  0
1             1            1
locks                                5000
2147483647           0            0
max degree of parallelism          0
32             0            0
max server memory (MB)              4
2147483647  2147483647  2147483647
max text repl size (B)              0
2147483647           65536          65536
max worker threads                  32
32767           320           320
media retention                      0
365            0            0
min memory per query (KB)          512
2147483647           1024          1024
min server memory (MB)              0
2147483647           0            0
nested triggers                      0
1             1            1
network packet size (B)             512
65536           4096          4096
open objects                          0
2147483647           0            0
priority boost                       0
1             1            1
query governor cost limit          0
2147483647           0            0
```

```

query wait (s)           -1           -1           -1
2147483647              -1           -1           -1
recovery interval (min)      0
32767          120          120          0
remote access
1          1           1           0
remote login timeout (s)      0
2147483647              20           20           0
remote proc trans
1          0           0           0
remote query timeout (s)      0
2147483647              600          600          0
scan for startup procs
1          0           0           0
set working set size
1          0           0           0
show advanced options
1          1           1           0
two digit year cutoff      1753
9999          2049          2049          0
user connections
32767          0           0           0
user options
32767          0           0           0

```

1>

Benchcraft Profile

Profile: Venom_3280_8vc1
File Path: C:\benchcraft\Venom_3280_8vc1.pro
Version: 3

Number of Engines: 8

```

Name: cl73a
Description:
Directory: c:\blog\cl73a.log
Machine: N15
Parameter Set: 4.0
Index: 50000000
Seed: 18546
Configured Users: 4100
Pipe Name: DRIVER286005718
Connect Rate: 0
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 0

Name: cl73b
Description:
Directory: c:\blog\cl73b.log
Machine: N15
Parameter Set: 4.0
Index: 100000000
Seed: 18546
Configured Users: 4100

```

```

Pipe Name: DRIVER2149515765
Connect Rate: 0
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 1

Name: cl73c
Description:
Directory: c:\blog\cl73c.log
Machine: N15
Parameter Set: 4.0
Index: 200000000
Seed: 18546
Configured Users: 4100
Pipe Name: DRIVER34355890
Connect Rate: 0
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 2

Name: cl73d
Description:
Directory: c:\blog\cl73d.log
Machine: N15
Parameter Set: 4.0
Index: 300000000
Seed: 18546
Configured Users: 4100
Pipe Name: DRIVER44400187
Connect Rate: 0
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 3

```

```

Name: cl74a
Description:
Directory: c:\blog\cl74a.log
Machine: N16
Parameter Set: 4.0
Index: 400000000
Seed: 18546
Configured Users: 4100
Pipe Name: DRIVER565600609
Connect Rate: 0
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 0

Name: cl74b
Description:
Directory: c:\blog\cl74b.log
Machine: N16
Parameter Set: 4.0
Index: 500000000
Seed: 18546

```

```

Configured Users: 4100
Pipe Name: DRIVER665661734
Connect Rate: 0
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 1

```

```

Name: cl74c
Description:
Directory: c:\blog\cl74c.log
Machine: N16
Parameter Set: 4.0
Index: 600000000
Seed: 18546
Configured Users: 4100
Pipe Name: DRIVER7172283812
Connect Rate: 0
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 2

```

```

Name: cl74d
Description:
Directory: c:\blog\cl74d.log
Machine: N16
Parameter Set: 4.0
Index: 700000000
Seed: 18546
Configured Users: 4100
Pipe Name: DRIVER8172323828
Connect Rate: 0
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 3

```

Number of User groups: 8

```

Driver Engine: cl73a
IIS Server: cr73
SQL Server: venom
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1 - 410
w_id Min Warehouse: 1
w_id Max Warehouse: 3280
Scale: Normal
User Count: 4100
District id: 1
Scale Down: No

```

```

Driver Engine: cl73b
IIS Server: cr73
SQL Server: venom
Database: tpcc
User: sa
Protocol: HTML

```

```
w_id Range: 411 - 820
w_id Min Warehouse: 1
w_id Max Warehouse: 3280
Scale: Normal
User Count: 4100
District id: 1
Scale Down: No

Driver Engine: cl73c
IIS Server: cr73
SQL Server: venom
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 821 - 1230
w_id Min Warehouse: 1
w_id Max Warehouse: 3280
Scale: Normal
User Count: 4100
District id: 1
Scale Down: No
```

```
Driver Engine: cl73d
IIS Server: cr73
SQL Server: venom
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1231 - 1640
w_id Min Warehouse: 1
w_id Max Warehouse: 3280
Scale: Normal
User Count: 4100
District id: 1
Scale Down: No
```

```
Driver Engine: cl74a
IIS Server: cr74
SQL Server: venom
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1641 - 2050
w_id Min Warehouse: 1
w_id Max Warehouse: 3280
Scale: Normal
User Count: 4100
District id: 1
Scale Down: No
```

```
Driver Engine: cl74b
IIS Server: cr74
SQL Server: venom
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2051 - 2460
w_id Min Warehouse: 1
w_id Max Warehouse: 3280
Scale: Normal
User Count: 4100
District id: 1
Scale Down: No
```

```
Driver Engine: cl74c
IIS Server: cr74
SQL Server: venom
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2461 - 2870
w_id Min Warehouse: 1
w_id Max Warehouse: 3280
Scale: Normal
User Count: 4100
District id: 1
Scale Down: No

Driver Engine: cl74d
IIS Server: cr74
SQL Server: venom
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2871 - 3280
w_id Min Warehouse: 1
w_id Max Warehouse: 3280
Scale: Normal
User Count: 4100
District id: 1
Scale Down: No
```

Number of Parameter Sets: 52

~Default
Default Parameter Set
Txn Think

Key	RT	RT	Menu	Weight	Time
12.05	18.01	0.10	New Order	10.00	
12.05	3.01	0.10	Payment	10.00	
5.05	2.01	0.10	Delivery	1.00	
5.05	2.01	0.10	Stock Level	1.00	
10.05	2.01	0.10	Order Status	1.00	

Tuned Distribution

Key	RT	RT	Menu	Weight	Time
12.05	18.01	0.10	New Order	44.75	
12.05	3.01	0.10	Payment	43.10	
5.05	2.01	0.10	Delivery	4.05	
5.05	2.01	0.10	Stock Level	4.05	
5.05	2.01	0.10	Order Status	4.05	

Order	Status	4.05
10.05	2.01	0.10
5.00	0.10	

No Think

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
0.00	0.00	0.00	New Order	10.00	
0.00	0.00	0.00	Payment	10.00	
0.00	0.00	0.00	Delivery	1.00	
0.00	0.00	0.00	Stock Level	1.00	
0.00	0.00	0.00	Order Status	1.00	

95%

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
13.00	18.01	0.10	New Order	44.75	
13.00	3.01	0.10	Payment	43.10	
6.00	2.01	0.10	Delivery	4.05	
6.00	2.01	0.10	Stock Level	4.05	
6.00	2.01	0.10	Order Status	4.05	

90%

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
16.00	18.01	0.10	New Order	44.75	
16.00	3.01	0.10	Payment	43.10	
9.00	2.01	0.10	Delivery	4.05	
9.00	2.01	0.10	Stock Level	4.05	
9.00	2.01	0.10	Order Status	4.05	

1.6
1.6 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
19.28	18.01	0.10	New Order	44.75	

						Txn	Think			Order Status	4.05	
		Key	RT	RT	Menu			34.17	2.01	0.10	5.00	0.10
		Time	Delay	Fence	Delay		Weight			3.2		
19.28	3.01	Payment	0.10	5.00	0.10	43.10				3.2 tt		
		Delivery	0.10	5.00	0.10	4.05						
8.08	2.01	Stock Level	0.10	5.00	0.10	4.05						
8.08	2.01	Order Status	0.10	20.00	0.10	4.05						
16.08	2.01		0.10	5.00	0.10							
			2.0									
			2.0 tt									
						Txn	Think					
		Key	RT	RT	Menu							
		Time	Delay	Fence	Delay		Weight	Time				
						New Order	44.88					
24.10	24.10		0.10	5.00	0.10							
						Payment	43.03					
24.10	24.10		0.10	5.00	0.10							
						Delivery	4.03					
10.10	10.10		0.10	5.00	0.10							
						Stock Level	4.03					
10.10	10.10		0.10	20.00	0.10							
						Order Status	4.03					
20.10	20.10		0.10	5.00	0.10							
			2.6									
			2.6 tt									
						Txn	Think					
		Key	RT	RT	Menu							
		Time	Delay	Fence	Delay		Weight	Time				
						New Order	44.75					
31.33	18.01		0.10	5.00	0.10							
						Payment	43.10					
31.33	3.01		0.10	5.00	0.10							
						Delivery	4.05					
13.13	2.01		0.10	5.00	0.10							
						Stock Level	4.05					
13.13	2.01		0.10	20.00	0.10							
						Order Status	4.05					
26.13	2.01		0.10	5.00	0.10							
			3.0									
			3.0 tt									
						Txn	Think					
		Key	RT	RT	Menu							
		Time	Delay	Fence	Delay		Weight	Time				
						New Order	44.75					
36.15	18.01		0.10	5.00	0.10							
						Payment	43.10					
36.15	3.01		0.10	5.00	0.10							
						Delivery	4.05					
15.15	2.01		0.10	5.00	0.10							
						Stock Level	4.05					
15.15	2.01		0.10	20.00	0.10							
						Order Status	4.05					
30.15	2.01		0.10	5.00	0.10							
			4.0									
			4.0 tt									
						Txn	Think					
		Key	RT	RT	Menu							
		Time	Delay	Fence	Delay		Weight	Time				
						New Order	44.75					
40.97	18.01		0.10	5.00	0.10							
						Payment	43.10					
40.97	3.01		0.10	5.00	0.10							
						Delivery	4.05					
17.17	2.01		0.10	5.00	0.10							
						Stock Level	4.05					
17.17	2.01		0.10	20.00	0.10							
						Order Status	4.05					
						Txn	Think					
		Key	RT	RT	Menu							
		Time	Delay	Fence	Delay		Weight	Time				
						New Order	44.86					
26.51	18.01		0.10	5.00	0.10							
						Payment	43.10					
						Delivery	4.05					
						Stock Level	4.05					
						Order Status	4.05					

						Txn	Think			Order Status		4.03
Key	RT	RT	Menu					10.65	2.01	0.10	5.00	0.10
26.51	3.01	Payment 0.10	5.00	0.10	43.05							
		Delivery 0.10			4.03							
11.11	2.01	0.10	5.00	0.10								
		Stock Level			4.03							
11.11	2.01	0.10	20.00	0.10								
		Order Status			4.03							
22.11	2.01	0.10	5.00	0.10								
		1.1										
		1.1 tt										
			Txn		Think							
Key	RT	RT	Menu									
				Weight	Time							
Time	Delay	Fence	Delay									
				New Order		44.86						
13.25	18.01	0.10	5.00	0.10								
		Payment			43.05							
13.25	3.01	0.10	5.00	0.10								
		Delivery			4.03							
5.55	2.01	0.10	5.00	0.10								
		Stock Level			4.03							
5.55	2.01	0.10	20.00	0.10								
		Order Status			4.03							
11.05	2.01	0.10	5.00	0.10								
		1.2										
		1.2 tt										
			Txn		Think							
Key	RT	RT	Menu									
				Weight	Time							
Time	Delay	Fence	Delay									
				New Order		44.86						
14.46	18.01	0.10	5.00	0.10								
		Payment			43.05							
14.46	3.01	0.10	5.00	0.10								
		Delivery			4.03							
6.06	2.01	0.10	5.00	0.10								
		Stock Level			4.03							
6.06	2.01	0.10	20.00	0.10								
		Order Status			4.03							
12.06	2.01	0.10	5.00	0.10								
		1.05										
		1.05tt										
			Txn		Think							
Key	RT	RT	Menu									
				Weight	Time							
Time	Delay	Fence	Delay									
				New Order		44.86						
12.65	18.01	0.10	5.00	0.10								
		Payment			43.05							
12.65	3.01	0.10	5.00	0.10								
		Delivery			4.03							
5.30	2.01	0.10	5.00	0.10								
		Stock Level			4.03							
5.30	2.01	0.10	20.00	0.10								
		Order Status			4.03							
10.55	2.01	0.10	5.00	0.10								
		1.01										
		1.01tt										
			Txn		Think							
Key	RT	RT	Menu									
				Weight	Time							
Time	Delay	Fence	Delay									
				New Order		44.86						
12.77	18.01	0.10	5.00	0.10								
		Payment			43.05							
12.77	3.01	0.10	5.00	0.10								
		Delivery			4.03							
5.35	2.01	0.10	5.00	0.10								
		Stock Level			4.03							
5.35	2.01	0.10	20.00	0.10								
		Order Status			4.03							
		1.005										
		1.005tt										
			Txn		Think							
Key	RT	RT	Menu									
				Weight	Time							
Time	Delay	Fence	Delay									
				New Order		44.86						
12.11	18.01	0.10	5.00	0.10								

						Txn	Think		Order Status	4.03		
Key	RT	RT	Menu	Weight	Time			14.87	2.01	0.10	5.00	0.10
12.11	3.01	Payment 0.10	5.00	0.10	43.05							
		Delivery 0.10			4.03							
5.08	2.01	0.10	5.00	0.10								
		Stock Level			4.03							
5.08	2.01	0.10	20.00	0.10								
		Order Status			4.03							
10.10	2.01	0.10	5.00	0.10								
		1.8tt										
			Txn		Think							
Key	RT	RT	Menu	Weight	Time							
Time	Delay	Fence	Delay									
			New Order			44.86						
21.69	18.01	0.10	5.00	0.10								
			Payment			43.05						
21.69	3.01	0.10	5.00	0.10								
			Delivery			4.03						
9.09	2.01	0.10	5.00	0.10								
			Stock Level			4.03						
9.09	2.01	0.10	20.00	0.10								
			Order Status			4.03						
18.09	2.01	0.10	5.00	0.10								
		1.9										
Key	RT	RT	Menu	Weight	Time							
Time	Delay	Fence	Delay									
			New Order			44.86						
22.90	18.01	0.10	5.00	0.10								
			Payment			43.05						
22.90	3.01	0.10	5.00	0.10								
			Delivery			4.03						
9.60	2.01	0.10	5.00	0.10								
			Stock Level			4.03						
9.60	2.01	0.10	20.00	0.10								
			Order Status			4.03						
19.10	2.01	0.10	5.00	0.10								
		1.4										
		1.4 tt										
Key	RT	RT	Menu	Weight	Time							
Time	Delay	Fence	Delay									
			New Order			44.86						
16.87	18.01	0.10	5.00	0.10								
			Payment			43.05						
16.87	3.01	0.10	5.00	0.10								
			Delivery			4.03						
7.07	2.01	0.10	5.00	0.10								
			Stock Level			4.03						
7.07	2.01	0.10	20.00	0.10								
			Order Status			4.03						
14.07	2.01	0.10	5.00	0.10								
		1.5										
		1.5 tt										
Key	RT	RT	Menu	Weight	Time							
Time	Delay	Fence	Delay									
			New Order			44.86						
17.83	18.01	0.10	5.00	0.10								
			Payment			43.05						
17.83	3.01	0.10	5.00	0.10								
			Delivery			4.03						
7.47	2.01	0.10	5.00	0.10								
			Stock Level			4.03						
7.47	2.01	0.10	20.00	0.10								

						Txn	Think			Order Status	4.03
		Key	RT	RT	Menu			12.26	2.01	0.10	5.00
		Time	Delay	Fence	Delay		Weight			1.21	
17.35	3.01	Payment	0.10	5.00	0.10	43.05					
		Delivery	0.10	5.00	0.10	4.03					
7.27	2.01	Stock Level	0.10	5.00	0.10	4.03					
7.27	2.01	Order Status	0.10	20.00	0.10	4.03					
14.47	2.01		0.10	5.00	0.10						
			1.43								
			1.43 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
				New Order		44.86					
17.23	18.01		0.10	5.00	0.10						
				Payment		43.05					
17.23	3.01		0.10	5.00	0.10						
				Delivery		4.03					
7.22	2.01	Stock Level	0.10	5.00	0.10	4.03					
7.22	2.01	Order Status	0.10	20.00	0.10	4.03					
14.37	2.01		0.10	5.00	0.10						
			1.42								
			1.42 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
				New Order		44.86					
17.11	18.01		0.10	5.00	0.10						
				Payment		43.05					
17.11	3.01		0.10	5.00	0.10						
				Delivery		4.03					
7.17	2.01	Stock Level	0.10	5.00	0.10	4.03					
7.17	2.01	Order Status	0.10	20.00	0.10	4.03					
14.27	2.01		0.10	5.00	0.10						
			1.41								
			1.41 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
				New Order		44.86					
16.99	18.01		0.10	5.00	0.10						
				Payment		43.05					
16.99	3.01		0.10	5.00	0.10						
				Delivery		4.03					
7.12	2.01	Stock Level	0.10	5.00	0.10	4.03					
7.12	2.01	Order Status	0.10	20.00	0.10	4.03					
14.17	2.01		0.10	5.00	0.10						
			1.25								
			1.25 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
				New Order		44.86					
14.70	18.01		0.10	5.00	0.10						
				Payment		43.05					
14.70	3.01		0.10	5.00	0.10						
				Delivery		4.03					
6.16	2.01	Stock Level	0.10	5.00	0.10	4.03					
6.16	2.01		0.10	20.00	0.10	4.03					
			1.22								
			1.22 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
				New Order		44.86					
14.10	18.01		0.10	5.00	0.10						
				Payment		43.05					
14.10	3.01		0.10	5.00	0.10						
				Delivery		4.03					
5.96	2.01	Stock Level	0.10	5.00	0.10	4.03					
5.96	2.01	Order Status	0.10	20.00	0.10	4.03					
11.86	2.01		0.10	5.00	0.10						
			1.17								
			1.17 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
				New Order		44.86					

14.10	3.01	Payment 0.10	5.00	43.05 0.10
		Delivery 0.10		4.03
5.91	2.01	Stock Level 0.10	5.00	0.10 4.03
5.91	2.01	Order Status 0.10	20.00	0.10 4.03
11.76	2.01		5.00	0.10 1.16 1.16 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
13.98	18.01	New Order 0.10	5.00	44.86 0.10	
		Payment 0.10		43.05	
13.98	3.01	Delivery 0.10	5.00	0.10 4.03	
5.86	2.01	Stock Level 0.10	5.00	0.10 4.03	
5.86	2.01	Order Status 0.10	20.00	0.10 4.03	
11.66	2.01		5.00	0.10 1.15 1.15 tt	

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
13.86	18.01	New Order 0.10	5.00	44.86 0.10	
		Payment 0.10		43.05	
13.86	3.01	Delivery 0.10	5.00	0.10 4.03	
5.80	2.01	Stock Level 0.10	5.00	0.10 4.03	
5.80	2.01	Order Status 0.10	20.00	0.10 4.03	
11.56	2.01		5.00	0.10 0.4e,00,54,00,5c,00,53,00,\	

Internet Information Server Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters]
"ListenBackLog"=dword:00000019
```

```
"DispatchEntries"=hex(7):4c,00,44,00,41,00,50,00,53,0
0,56,00,43,00,00,00,00,00
"PoolThreadLimit"=dword:000003fe
"ThreadTimeout"=dword:00015180

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Performance]
"Library"="infctrs.dll"
"Open"="OpenINFOPerformanceData"
"Close"="CloseINFOPerformanceData"
"Collect"="CollectINFOPerformanceData"
"Last Counter"=dword:00000842
"Last Help"=dword:00000843
"First Counter"=dword:00000802
"First Help"=dword:00000803
"Library Validation
Code"=hex:30,bb,ee,43,77,5b,c2,01,10,25,00,00,00,00,0
0,00
"WBemAdapFileTime"=hex:00,73,79,5b,bc,d4,c0,01
"WBemAdapFileSize"=dword:00002510
"WBemAdapStatus"=dword:00000000
```

World Wide Web Service Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC]
>Type"=dword:00000020
"Start"=dword:00000002
"ErrorControl"=dword:00000001
"ImagePath"=hex(2):43,00,3a,00,5c,00,57,00,49,00,4e,0
0,4e,00,54,00,5c,00,53,00,\

79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,69,0
0,6e,00,65,00,74,00,73,\

00,72,00,76,00,5c,00,69,00,6e,00,65,00,74,00,69,00,6
e,00,66,00,6f,00,2e,00,\

65,00,78,00,65,00,00,00
"DisplayName"="World Wide Web Publishing Service"
"DependOnService"=hex(7):49,00,49,00,53,00,41,00,44,0
0,4d,00,49,00,4e,00,00,00,\

00,00
"DependOnGroup"=hex(7):00,00
"ObjectName"="LocalSystem"
>Description"="Provides Web connectivity and
administration through the Internet Information
Services snap-in."
"FailureActions"=hex:ff,ff,ff,ff,00,00,00,00,00,00,00,0
0,03,00,00,00,50,a8,0d,\

0,00
```

```
0,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00
,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP]
"NOTE"="This is for backward compatibility only."
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP\Parameters]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters]
"MajorVersion"=dword:00000005
"MinorVersion"=dword:00000000
"InstallPath"="C:\WINNT\System32\inetsrv"
"CertMapList"="C:\WINNT\System32\inetsrv\iiscrmap
.dll"
"AccessDeniedMessage"="Error: Access is Denied."
"Filter DLLs"=""
"LogFileDirectory"="C:\WINNT\System32\LogFiles"
"AcceptExOutstanding"=dword:00000028
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Script Map]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Virtual Roots]
"/"="c:\\inetpub\\wwwroot,,207"
"/Scripts"="c:\\inetpub\\scripts,,1"
"/IISHelp"="c:\\winnt\\help\\iishelp,,1"
"/IISAdmin"="C:\\WINNT\\System32\\inetsrv\\iisadmin,,1"
"/IISsamples"="c:\\inetpub\\iissamples,,1"
"/MSADC"="c:\\program files\\common
files\\system\\msadc,,1"
"/_vti_bin"="C:\\Program Files\\Common
Files\\Microsoft Shared\\Web Server
Extensions\\40\\isapi,,1"
"/Printers"="C:\\WINNT\\web\\printers,,201"
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance]
"Library"="w3ctrs.dll"
"Open"="OpenW3PerformanceData"
"Close"="CloseW3PerformanceData"
"Collect"="CollectW3PerformanceData"
"Last Counter"=dword:000008e6
"Last Help"=dword:000008e7
"First Counter"=dword:00000844
"First Help"=dword:00000845
"Library Validation
Code"=hex:de,61,7e,46,77,5b,c2,01,10,3d,00,00,00,00,0
0,00
```

```

"NbemAdapFileTime"=hex:00,73,79,5b,bc,d4,c0,01
"NbemAdapFileSize"=dword:00001d10
"NbemAdapStatus"=dword:00000000

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Security]
"Security"=hex:01,00,14,80,a0,00,00,00,ac,00,00,00,14
,00,00,00,30,00,00,00,02,\

00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00
,00,00,00,01,00,00,\

00,00,02,00,70,00,04,00,00,00,00,18,00,fd,01,02,00
,01,01,00,00,00,00,00,\

05,12,00,00,00,74,00,6f,00,00,00,1c,00,ff,01,0f,00,01
,02,00,00,00,00,05,\

20,00,00,00,20,02,00,00,72,00,73,00,00,00,18,00,8d,01
,02,00,01,01,00,00,\

00,00,05,0b,00,00,00,20,02,00,00,00,00,1c,00,fd,01,02
,00,01,02,00,00,00,\

00,05,20,00,00,00,23,02,00,00,72,00,73,00,01,01,00,00
,00,00,00,05,12,00,00,\

00,01,01,00,00,00,00,00,05,12,00,00,00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\W3SVC\Enum]
"0"="Root\LEGACY_W3SVC\0000"
"Count"=dword:00000001
"NextInstance"=dword:00000001

```

TPCC Application Registry Parameters

Windows Registry Editor Version 5.00

```

[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC]
"Path"="C:\\Inetpub\\wwwroot\\"
"NumberOfDeliveryThreads"=dword:00000010
"MaxConnections"=dword:00005bcc
"MaxPendingDeliveries"=dword:00000fa0
"DB_Protocol"="ODBC"
"TxnMonitor"="COM"
"DbServer"="venom"
"DbName"="tpcc"
"DbUser"="sa"
"DbPassword"=""
"COM_SinglePool"="YES"

```

Server Bus Performance Driver Registry Parameters

Windows Registry Editor Version 5.00

```

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\hpqci(ssb)]
>Type"=dword:00000001
"Start"=dword:00000000
"ErrorControl"=dword:00000001
"Tag"=dword:00000102
"ImagePath"=hex(2):73,00,79,00,73,00,74,00,65,00,6d,0
0,33,00,32,00,5c,00,44,00,\

52,00,49,00,56,00,45,00,52,00,53,00,5c,00,68,00,70,00
,71,00,63,00,69,00,73,\

00,73,00,62,00,2e,00,73,00,79,00,73,00,00,00
"DisplayName"="Smart Array Controllers Non-Miniport
Bus Driver"
"Group"="port"

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\hpqci(ssb\Parameters)]
"CompletionMode"=dword:00000002

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\hpqci(ssb\Parameters\Controller0]
"CompletionMode"=dword:00000001

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\hpqci(ssb\Security]
"Security"=hex:01,00,14,80,90,00,00,00,9c,00,00,00,14
,00,00,00,30,00,00,00,02,\

00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00
,00,00,00,01,00,00,\

00,00,02,00,60,00,04,00,00,00,00,00,14,00,fd,01,02,00
,01,01,00,00,00,00,00,\

05,12,00,00,00,00,00,18,00,ff,01,0f,00,01,02,00,00,00
,00,00,05,20,00,00,00,\

20,02,00,00,00,00,14,00,8d,01,02,00,01,01,00,00,00,00
,00,05,0b,00,00,00,00,\

00,18,00,fd,01,02,00,01,02,00,00,00,00,00,05,20,00,00
,00,23,02,00,00,01,01,\

00,00,00,00,00,05,12,00,00,00,01,01,00,00,00,00,05
,12,00,00,00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\hpqci(ssb\Enum]

```

```

"0"="PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\\3
&267a616a&0&08"
"Count"=dword:00000005
"NextInstance"=dword:00000005
"1"="PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\\3
&13c0b0c5&0&08"
"2"="PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\\3
&13c0b0c5&0&10"
"3"="PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\\3
&1070020&0&08"
"4"="PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\\3
&1070020&0&10"

```

Server Disk Device Performance Driver Registry Parameters

Windows Registry Editor Version 5.00

```

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\hpqci(ssd)]
>Type"=dword:00000001
"Start"=dword:00000000
"ErrorControl"=dword:00000001
"Tag"=dword:00000102
"ImagePath"=hex(2):73,00,79,00,73,00,74,00,65,00,6d,0
0,33,00,32,00,5c,00,44,00,\

52,00,49,00,56,00,45,00,52,00,53,00,5c,00,68,00,70,00
,71,00,63,00,69,00,73,\

00,73,00,64,00,2e,00,73,00,79,00,73,00,00,00
"DisplayName"="Smart Array Controllers Non-Miniport
Disk Driver"
"Group"="Primary Disk"

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\hpqci(ssd\Security]
"Security"=hex:01,00,14,80,90,00,00,00,9c,00,00,00,14
,00,00,00,30,00,00,00,02,\

00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00
,00,00,00,01,00,00,\

00,00,02,00,60,00,04,00,00,00,00,00,14,00,fd,01,02,00
,01,01,00,00,00,00,\

05,12,00,00,00,00,00,18,00,ff,01,0f,00,01,02,00,00,00
,00,00,05,20,00,00,00,\

20,02,00,00,00,00,14,00,8d,01,02,00,01,01,00,00,00,00
,00,05,0b,00,00,00,00,\

00,18,00,fd,01,02,00,01,02,00,00,00,00,00,05,20,00,00
,00,23,02,00,00,01,01,\

00,00,00,00,00,05,12,00,00,00,01,01,00,00,00,00,05
,12,00,00,00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\hpqci(ssd\Enum]

```

```

00,18,00,fd,01,02,00,01,02,00,00,00,00,00,05,20,00,00
,00,23,02,00,00,01,01,\

00,00,00,00,05,12,00,00,01,01,00,00,00,00,00,05
,12,00,00,00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd\Enum]
"0"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
1e595b43&0x0000004000000000"
"Count"="dword:0000000d
"NextInstance"="dword:0000000d
"1"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
2d73aec0&0x0000004000000000"
"2"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
2d73aec0&0x0100004000000000"
"3"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
2d73aec0&0x0200004000000000"
"4"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
e6aac0&0x0000004000000000"
"5"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
e6aac0&0x0100004000000000"
"6"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
e6aac0&0x0200004000000000"
"7"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
33332ab6&0x0000004000000000"
"8"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
33332ab6&0x0100004000000000"
"9"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
33332ab6&0x0200004000000000"
"10"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
&16a16360&0x0000004000000000"
"11"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
&16a16360&0x0100004000000000"
"12"="HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\\4&
&16a16360&0x0200004000000000"

```

System Summary

System Information report written at: 05/02/03

18:41:04

System Name: VENOM

[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003, Enterprise Edition
Version	5.2.3790 Build 3790
OS Manufacturer	Microsoft Corporation
System Name	VENOM
System Manufacturer	Compaq
System Model	ProLiant ML350 G3
System Type	X86-based PC
Processor x86 Family 15 Model 2 Stepping 7	GenuineIntel ~2790 Mhz
Processor x86 Family 15 Model 2 Stepping 7	GenuineIntel ~2790 Mhz

```

Processor x86 Family 15 Model 2 Stepping 7
GenuineIntel ~2790 Mhz
Processor x86 Family 15 Model 2 Stepping 7
GenuineIntel ~2790 Mhz
BIOS Version/Date Compaq D14, 3/21/2003
SMBIOS Version 2.3
Windows Directory C:\WINDOWS
System Directory C:\WINDOWS\system32
Boot Device \Device\HarddiskVolume14
Locale United States
Hardware Abstraction Layer Version = "5.2.3790.0
(srV03_rtm.030324-2048)"
User Name VENOM\Administrator
Time Zone Central Daylight Time
Total Physical Memory 8,192.00 MB
Available Physical Memory 7.48 GB
Total Virtual Memory 17.31 GB
Available Virtual Memory 16.97 GB
Page File Space 9.56 GB
Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device Status
Memory Address 0xF7800000-0xF7BFFFFF PCI bus
Memory Address 0xF7800000-0xF7BFFFFF Smart Array
5300 Controller (Non-Miniport)

I/O Port 0x00000000-0x00000CFF PCI bus
I/O Port 0x00000000-0x00000CFF PCI bus
I/O Port 0x00000000-0x00000CFF Direct memory
access controller

Memory Address 0xF7C00000-0xF7FFFFFF PCI bus
Memory Address 0xF7C00000-0xF7FFFFFF Smart Array
5300 Controller (Non-Miniport)

IRQ 31 Compaq 64-bit/66MHz Dual Channel Wide
Ultra3 SCSI Adapter
IRQ 31 Compaq 64-bit/66MHz Dual Channel Wide
Ultra3 SCSI Adapter

I/O Port 0x000003C0-0x000003DF PCI bus
I/O Port 0x000003C0-0x000003DF RAGE XL PCI
Family (Microsoft Corporation)

I/O Port 0x00003000-0x000034FF PCI bus
I/O Port 0x00003000-0x000034FF Smart Array
5300 Controller (Non-Miniport)

Memory Address 0xA0000-0xBFFFF PCI bus
Memory Address 0xA0000-0xBFFFF RAGE XL PCI
Family (Microsoft Corporation)

I/O Port 0x000003B0-0x000003BB PCI bus
I/O Port 0x000003B0-0x000003BB RAGE XL PCI
Family (Microsoft Corporation)

I/O Port 0x00004000-0x000044FF PCI bus

```

I/O Port	0x00004000-0x000044FF	Smart Array
	5300 Controller (Non-Miniport)	
[DMA]		
Resource	Device	Status
Channel 7	Direct memory access controller	OK
Channel 2	Standard floppy disk controller	OK
[Forced Hardware]		
Device	PNP Device ID	
[I/O]		
Resource	Device	Status
0x00000000-0x00000CFF	PCI bus	OK
0x00000000-0x00000CFF	PCI bus	OK
0x00000000-0x00000CFF	Direct memory access	
controller	OK	
0x000003B0-0x000003BB	PCI bus	OK
0x000003B0-0x000003BB	RAGE XL PCI Family	
(Microsoft Corporation)	OK	
0x000003C0-0x000003DF	PCI bus	OK
0x000003C0-0x000003DF	RAGE XL PCI Family	
(Microsoft Corporation)	OK	
0x00002400-0x000024FF	Smart Array	5300
Controller (Non-Miniport)	OK	
0x00002800-0x000028FF	Compaq 64-bit/66MHz	
Dual Channel Wide Ultra3 SCSI Adapter	OK	
0x00002B00-0x00002BFF	Compaq 64-bit/66MHz	
Dual Channel Wide Ultra3 SCSI Adapter	OK	
0x00002C00-0x00002CFF	RAGE XL PCI Family	
(Microsoft Corporation)	OK	
0x00001800-0x000018FF	Compaq Advanced System	
Management Controller	OK	
0x0000A79-0x0000A79	ISAPNP Read Data Port	
OK		
0x00000279-0x00000279	ISAPNP Read Data Port	
OK		
0x00000274-0x00000277	ISAPNP Read Data Port	
OK		
0x00000F50-0x00000F58	Motherboard resources	
OK		
0x00000408-0x0000040F	Motherboard resources	
OK		
0x0000092-0x0000092	Motherboard resources	
OK		
0x00000900-0x00000903	Motherboard resources	
OK		
0x00000904-0x00000904	Motherboard resources	
OK		
0x00000910-0x00000911	Motherboard resources	
OK		
0x00000920-0x00000923	Motherboard resources	
OK		
0x00000930-0x00000937	Motherboard resources	
OK		
0x00000940-0x00000947	Motherboard resources	
OK		

0x000000950-0x000000957	Motherboard resources	0x000003F8-0x000003FF	Communications Port (COM1)	OK	0xA0000-0xBFFF	RAGE XL PCI Family (Microsoft Corporation)	PCI bus OK
0x00000C06-0x00000C08	Motherboard resources	0x000003F2-0x000003F5	Standard floppy disk controller	OK	0xF5F00000-0xF77FFFFF	Smart Array 5300 Controller (Non-Miniport)	Smart Array 5300
0x00000C14-0x00000C14	Motherboard resources	0x000003F7-0x000003F7	Standard floppy disk controller	OK	0xF7600000-0xF76FFFFF	Smart Array 5300 Controller (Non-Miniport)	Smart Array 5300
0x00000C49-0x00000C4A	Motherboard resources	0x00002000-0x0000200F	CSB5 IDE Controller	OK	0xF75F0000-0xF75F0FFF	Compaq 64-bit/66MHz Dual Channel Wide Ultra3 SCSI Adapter	Compaq 64-bit/66MHz
0x00000C50-0x00000C52	Motherboard resources	0x000001F0-0x000001F7	Primary IDE Channel	OK	0xF77BF000-0xF77BFFFF	Dual Channel Wide Ultra3 SCSI Adapter	Compaq 64-bit/66MHz
0x00000C6C-0x00000C6F	Motherboard resources	0x000003F6-0x000003F6	Primary IDE Channel	OK	0xF6000000-0xF6FFFF	RAGE XL PCI Family (Microsoft Corporation)	RAGE XL PCI Family
0x00000010-0x0000001F	Motherboard resources	0x00000170-0x00000177	Secondary IDE Channel	OK	0xF5FF0000-0xF5FF0FFF	(Microsoft Corporation)	RAGE XL PCI Family
0x00000230-0x00000233	Motherboard resources	0x00000376-0x00000376	Secondary IDE Channel	OK	0x5FE0000-0x5F5EFFFF	BCM5703 Gigabit Ethernet	Gigabit
0x00000260-0x00000267	Motherboard resources	0x00003000-0x000034FF	PCI bus	OK	0x5FD0000-0xF5FD00FF	Compaq Advanced System Management Controller	Advanced System
0x000004D0-0x000004D1	Motherboard resources	0x00003000-0x000034FF	Smart Array 5300 Controller (Non-Miniport)	OK	0xF7800000-0xF7BFxFFFF	PCI bus	OK
0x00000700-0x0000070F	Motherboard resources	0x00003400-0x000034FF	Smart Array 5300 Controller (Non-Miniport)	OK	0xF7800000-0xF7BFxFFFF	Smart Array 5300 Controller (Non-Miniport)	Smart Array 5300
0x00000800-0x0000081F	Motherboard resources	0x00004000-0x000044FF	PCI bus	OK	0x7BC0000-0xF7BFxFFFF	Smart Array 5300 Controller (Non-Miniport)	Smart Array 5300
0x00000C80-0x00000C83	Motherboard resources	0x00004000-0x000044FF	Smart Array 5300 Controller (Non-Miniport)	OK	0x7A00000-0xF7AFxFFFF	Smart Array 5300 Controller (Non-Miniport)	Smart Array 5300
0x00000CD4-0x00000CD7	Motherboard resources	[IRQs]	Smart Array 5300 Controller (Non-Miniport)	OK	0x79C0000-0xF79FFFFF	Smart Array 5300 Controller (Non-Miniport)	Smart Array 5300
0x00000CF9-0x00000CF9	Motherboard resources	Resource Device Status	Smart Array 5300	OK	0x7C00000-0xF7FFFFFF	PCI bus	OK
0x00000020-0x0000021	Programmable interrupt controller	IRQ 9 Microsoft ACPI-Compliant System	OK	0x7FC0000-0xF7FFFFFF	Smart Array 5300 Controller (Non-Miniport)	Smart Array 5300	
0x00000A0-0x00000A1	Programmable interrupt controller	IRQ 18 Smart Array 5300 Controller (Non-Miniport)	OK	0x7E00000-0xF7EFFFFF	Smart Array 5300 Controller (Non-Miniport)	Smart Array 5300	
0x00000C00-0x00000C01	Programmable interrupt controller	IRQ 31 Compaq 64-bit/66MHz Dual Channel Wide Ultra3 SCSI Adapter	OK	0x7DC0000-0xF7DFFFFFF	Smart Array 5300 Controller (Non-Miniport)	Smart Array 5300	
0x00000040-0x00000043	System timer	IRQ 31 Compaq 64-bit/66MHz Dual Channel Wide Ultra3 SCSI Adapter	OK	0x7D00000-0xF7DFFFFFF	Controller (Non-Miniport)	OK	
0x00000080-0x0000008F	Direct memory access controller	IRQ 28 BCM5703 Gigabit Ethernet	OK	[Components]			
0x000000C0-0x000000DF	Direct memory access controller	IRQ 7 Compaq Advanced System Management Controller	OK				
0x0000040B-0x0000040B	Direct memory access controller	IRQ 0 System timer	OK	[Multimedia]			
0x0000004D6-0x000004D6	Direct memory access controller	IRQ 1 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK				
0x00000061-0x00000061	System speaker	IRQ 12 PS/2 Compatible Mouse	OK	[Audio Codecs]			
0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	IRQ 4 Communications Port (COM1)	OK	CODEC Manufacturer Status File Version Size			
0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	IRQ 6 Standard floppy disk controller	OK	c:\windows\system32\sl_anet.acm Sipro Lab Telecom Inc.	C:\WINDOWS\system32\SL_ANET.ACML	OK	
0x0000002E-0x0000002F	Extended IO Bus	IRQ 14 Primary IDE Channel	OK	3.02 84.00 KB (86,016 bytes)			
0x00000220-0x00000223	Extended IO Bus	IRQ 26 Smart Array 5300 Controller (Non-Miniport)	OK	3/25/2003 12:00 AM			
0x00000240-0x0000025F	Extended IO Bus	IRQ 22 Smart Array 5300 Controller (Non-Miniport)	OK	c:\windows\system32\msaud32.acm Microsoft Corporation Windows Media Audio Codec	C:\WINDOWS\system32\MSAUD32.ACM	OK	
0x00000070-0x00000073	Extended IO Bus	IRQ 20 Smart Array 5300 Controller (Non-Miniport)	OK	8.00.00.4487 288.00 KB (294,912 bytes)			
0x00000378-0x0000037F	Printer Port (LPT1)	IRQ 1 [Memory]	OK	c:\windows\system32\tsssoft32.acm INC.	c:\windows\system32\tsssoft32.acm DSP GROUP, INC.	OK	
		Resource Device Status	PCI bus				
		0xA0000-0xBFFF	OK				

```

C:\WINDOWS\system32\TSSOFT32.ACM
1.01 9.50 KB (9,728 bytes)
3/25/2003 12:00 AM
c:\windows\system32\msg723.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSG723.ACM
4.4.4000 116.00 KB (118,784 bytes)
5/1/2003 6:36 PM
c:\windows\system32\msadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSADP32.ACM
5.2.3790.0 (srv03_rtm.030324-2048)
14.50 KB (14,848 bytes) 3/25/2003
12:00 AM
c:\windows\system32\msg711.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSG711.ACM
5.2.3790.0 (srv03_rtm.030324-2048)
10.00 KB (10,240 bytes) 3/25/2003
12:00 AM
c:\windows\system32\imaadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\IMAADP32.ACM
5.2.3790.0 (srv03_rtm.030324-2048)
15.50 KB (15,872 bytes) 3/25/2003
12:00 AM
c:\windows\system32\l3codeca.acm Fraunhofer
Institut Integrierte Schaltungen IIS Fraunhofer
IIS MPEG Layer-3 Codec OK
C:\WINDOWS\system32\L3CODECA.ACM 1,
9, 0, 0305 284.00 KB (290,816 bytes)
3/25/2003 12:00 AM
c:\windows\system32\msgsm32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSGSM32.ACM
5.2.3790.0 (srv03_rtm.030324-2048)
20.50 KB (20,992 bytes) 3/25/2003
12:00 AM
[Video Codecs]

CODEC Manufacturer Description
Status File Version Size
Creation Date
c:\windows\system32\msrl32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSRL32.DLL
5.2.3790.0 (srv03_rtm.030324-2048)
10.50 KB (10,752 bytes) 3/25/2003
12:00 AM
c:\windows\system32\msh261.drv Microsoft
Corporation OK
C:\WINDOWS\system32\MSH261.DRV
4.4.4000 180.00 KB (184,320 bytes)
5/1/2003 6:36 PM
c:\windows\system32\msyuv.dll Microsoft Corporation
OK
C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.0
(srv03_rtm.030324-2048) 16.50 KB (16,896 bytes)
3/24/2003 7:49 PM
c:\windows\system32\msvidc32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSVIDC32.DLL

```

```

5.2.3790.0 (srv03_rtm.030324-2048)
26.50 KB (27,136 bytes) 3/25/2003
12:00 AM
c:\windows\system32\iyuv_32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\IYUV_32.DLL
5.2.3790.0 (srv03_rtm.030324-2048)
45.00 KB (46,080 bytes) 3/24/2003
7:49 PM
c:\windows\system32\msh263.drv Microsoft
Corporation OK
C:\WINDOWS\system32\MSH263.DRV
4.4.4000 284.00 KB (290,816 bytes)
3/24/2003 7:46 PM
c:\windows\system32\tsbyuv.dll Microsoft
Corporation OK
C:\WINDOWS\system32\TSBYUV.DLL
5.2.3790.0 (srv03_rtm.030324-2048)
8.00 KB (8,192 bytes) 3/24/2003
7:50 PM
[CD-ROM]

Item Value
Drive D:
Description CD-ROM Drive
Media Loaded No
Media Type CD-ROM
Name COMPAQ CRD-8402B
Manufacturer (Standard CD-ROM drives)
Status OK
Transfer Rate Not Available
SCSI Target ID 0
PNP Device ID IDE\CDROMCOMPAQ_CRD-
8402B 1.03 \30323030302F2F3
530312020202020202020202020202020202020
Driver c:\windows\system32\drivers\cdrom.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 49.50 KB (50,688
bytes), 3/25/2003 12:00 AM)
[Sound Device]

Item Value
[Display]

Item Value
Name RAGE XL PCI Family (Microsoft Corporation)
PNP Device ID PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2
7\3&267A616A&0&18
Adapter Type ATI RAGE XL PCI (B41), ATI
Technologies Inc. compatible
Adapter Description RAGE XL PCI Family (Microsoft
Corporation)
Adapter RAM 8.00 MB (8,388,608 bytes)
Installed Drivers ati2drad.dll
Driver Version 5.10.3663.6013
INF File atiixpad.inf (ati2mpad section)
Color Planes 1
Color Table Entries 65536
Resolution 640 x 480 x 60 hertz

```

```

Bits/Pixel 16
Memory Address 0xF6000000-0xF6FFFFFF
I/O Port 0x00002C00-0x00002CFF
Memory Address 0xF5FF0000-0xF5FF0FFF
I/O Port 0x000003B0-0x000003BB
I/O Port 0x000003C0-0x000003DF
Memory Address 0xA0000-0xBFFFF
Driver c:\windows\system32\drivers\ati2mpad.sys
(5.10.3663.6013, 335.38 KB (343,424 bytes), 5/1/2003
12:54 PM)

[Infrared]

Item Value
[Input]

[Keyboard]

Item Value
Description Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard
Name Enhanced (101- or 102-key)
Layout 00000409
PNP Device ID ACPI\PNP0303\4&35118DFF&0
Number of Function Keys 12
I/O Port 0x00000060-0x00000060
I/O Port 0x00000064-0x00000064
IRQ Channel IRQ 1
Driver c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 68.50 KB (70,144
bytes), 3/25/2003 12:00 AM)

[Pointing Device]

Item Value
Hardware Type PS/2 Compatible Mouse
Number of Buttons 3
Status OK
PNP Device ID ACPI\PNP0F13\4&35118DFF&0
Power Management Supported No
Double Click Threshold 6
Handedness Right Handed Operation
IRQ Channel IRQ 12
Driver c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 68.50 KB (70,144
bytes), 3/25/2003 12:00 AM)

[Modem]

Item Value
[Network]

[Adapter]

Item Value
Name [00000001] BCM5703 Gigabit Ethernet
Adapter Type Ethernet 802.3

```

Product Type BCM5703 Gigabit Ethernet
 Installed Yes
 PNP Device ID PCI\VEN_14E4&DEV_16A6&SUBSYS_00BB0E11&REV_0
 2\3&267A616A&0&20
 Last Reset 5/2/2003 6:35 PM
 Index 1
 Service Name b57w2k
 IP Address 130.168.202.8
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:0B:CD:1C:F3:17
 Memory Address 0xP5FB0000-0xF5FFFF
 IRQ Channel IRQ 28
 Driver c:\windows\system32\drivers\b57xp32.sys
 (2.91.0.0 built by: WinDDK, 137.00 KB (140,288 bytes), 5/1/2003 12:54 PM)

 Name [00000002] RAS Async Adapter
 Adapter Type Not Available
 Product Type RAS Async Adapter
 Installed Yes
 PNP Device ID Not Available
 Last Reset 5/2/2003 6:35 PM
 Index 2
 Service Name AsyncMac
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

 Name [00000003] WAN Miniport (L2TP)
 Adapter Type Not Available
 Product Type WAN Miniport (L2TP)
 Installed Yes
 PNP Device ID ROOT\MS_L2TPMINIPORT\0000
 Last Reset 5/2/2003 6:35 PM
 Index 3
 Service Name Rasl2tp
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\rasl2tp.sys
 (5.2.3790.0 (srv03_rtm.030324-2048), 77.00 KB (78,848 bytes), 3/25/2003 12:00 AM)

 Name [00000004] WAN Miniport (PPTP)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPTP)
 Installed Yes

PNP Device ID ROOT\MS_PPTPMINIPORT\0000
 Last Reset 5/2/2003 6:35 PM
 Index 4
 Service Name PptpMiniport
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 50:50:54:50:30:30
 Driver c:\windows\system32\drivers\raspppt.sys
 (5.2.3790.0 (srv03_rtm.030324-2048), 70.50 KB (72,192 bytes), 3/25/2003 12:00 AM)

 Name [00000005] WAN Miniport (PPPOE)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPPOE)
 Installed Yes
 PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
 Last Reset 5/2/2003 6:35 PM
 Index 5
 Service Name RasPppoe
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 33:50:6F:45:30:30
 Driver c:\windows\system32\drivers\raspppoe.sys
 (5.2.3790.0 (srv03_rtm.030324-2048), 38.00 KB (38,912 bytes), 3/25/2003 12:00 AM)

 Name [00000006] Direct Parallel
 Adapter Type Not Available
 Product Type Direct Parallel
 Installed Yes
 PNP Device ID ROOT\MS_PTIMINIPORT\0000
 Last Reset 5/2/2003 6:35 PM
 Index 6
 Service Name Raspti
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\raspti.sys
 (5.2.3790.0 (srv03_rtm.030324-2048), 18.50 KB (18,944 bytes), 3/25/2003 12:00 AM)

 Name [00000007] WAN Miniport (IP)
 Adapter Type Not Available
 Product Type WAN Miniport (IP)
 Installed Yes
 PNP Device ID ROOT\MS_NDISWANIP\0000
 Last Reset 5/2/2003 6:35 PM
 Index 7

Service Name NdisWan
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\ndiswan.sys
 (5.2.3790.0 (srv03_rtm.030324-2048), 96.50 KB (98,816 bytes), 3/25/2003 12:00 AM)

[Protocol]

 Item Value
 Name MSAFD Tcpip [TCP/IP]
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 16 bytes
 Maximum Message Size 0 bytes
 Message Oriented No
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data Yes
 Supports Graceful Closing Yes
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

 Name MSAFD Tcpip [UDP/IP]
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 16 bytes
 Maximum Message Size 63.93 KB (65,467 bytes)

 Message Oriented Yes
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting Yes

 Name RSVP UDP Service Provider
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 16 bytes
 Maximum Message Size 63.93 KB (65,467 bytes)

 Message Oriented Yes
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No

Supports Broadcasting Yes	Supports Encryption No	Supports Encryption No
Supports Connect Data No	Supports Expedited Data No	Supports Expedited Data No
Supports Disconnect Data No	Supports Graceful Closing No	Supports Graceful Closing No
Supports Encryption Yes	Supports Guaranteed Bandwidth No	Supports Guaranteed Bandwidth No
Supports Expedited Data No	Supports Multicasting No	Supports Multicasting No
Supports Graceful Closing No		
Supports Guaranteed Bandwidth No		
Supports Multicasting Yes		
Name RSVP TCP Service Provider	Name MSAFD NetBIOS	Name MSAFD NetBIOS
Connectionless Service No	(\Device\NetBT_Tcpip_{B97D1A08-4958-4F63-8CE8-CF3C3275F848}) SEQPACKET 1	(\Device\NetBT_Tcpip_{7F6913D6-BEBA-41C6-8F2F-706719369B28}) DATAGRAM 2
Guarantees Delivery Yes	Connectionless Service No	Connectionless Service Yes
Guarantees Sequencing Yes	Guarantees Delivery Yes	Guarantees Delivery No
Maximum Address Size 16 bytes	Guarantees Sequencing Yes	Guarantees Sequencing No
Maximum Message Size 0 bytes	Maximum Address Size 20 bytes	Maximum Address Size 20 bytes
Message Oriented No	Maximum Message Size 62.50 KB (64,000 bytes)	Maximum Message Size 62.50 KB (64,000 bytes)
Minimum Address Size 16 bytes		
Pseudo Stream Oriented No	Message Oriented Yes	Message Oriented Yes
Supports Broadcasting No	Minimum Address Size 20 bytes	Minimum Address Size 20 bytes
Supports Connect Data No	Pseudo Stream Oriented No	Pseudo Stream Oriented No
Supports Disconnect Data No	Supports Broadcasting No	Supports Broadcasting Yes
Supports Encryption Yes	Supports Connect Data No	Supports Connect Data No
Supports Expedited Data Yes	Supports Disconnect Data No	Supports Disconnect Data No
Supports Graceful Closing Yes	Supports Encryption No	Supports Encryption No
Supports Guaranteed Bandwidth No	Supports Expedited Data No	Supports Expedited Data No
Supports Multicasting No	Supports Graceful Closing No	Supports Graceful Closing No
	Supports Guaranteed Bandwidth No	Supports Guaranteed Bandwidth No
	Supports Multicasting No	Supports Multicasting No
Name MSAFD NetBIOS	Name MSAFD NetBIOS	[WinSock]
(\Device\NetBT_Tcpip_{9B72052D-6E47-4A7A-891F-A896423C895F}) SEQPACKET 0	(\Device\NetBT_Tcpip_{B97D1A08-4958-4F63-8CE8-CF3C3275F848}) DATAGRAM 1	Item Value
Connectionless Service No	Connectionless Service Yes	File c:\windows\system32\winsock.dll
Guarantees Delivery Yes	Guarantees Delivery No	Size 2.80 KB (2,864 bytes)
Guarantees Sequencing Yes	Guarantees Sequencing No	Version 3.10
Maximum Address Size 20 bytes	Maximum Address Size 20 bytes	File c:\windows\system32\wsock32.dll
Maximum Message Size 62.50 KB (64,000 bytes)	Maximum Message Size 62.50 KB (64,000 bytes)	Size 22.00 KB (22,528 bytes)
Message Oriented Yes	Message Oriented Yes	Version 5.2.3790.0 (srv03_rtm.030324-2048)
Minimum Address Size 20 bytes	Minimum Address Size 20 bytes	[Ports]
Pseudo Stream Oriented No	Pseudo Stream Oriented No	
Supports Broadcasting No	Supports Broadcasting Yes	
Supports Connect Data No	Supports Connect Data No	
Supports Disconnect Data No	Supports Disconnect Data No	
Supports Encryption No	Supports Encryption No	
Supports Expedited Data No	Supports Expedited Data No	
Supports Graceful Closing No	Supports Graceful Closing No	
Supports Guaranteed Bandwidth No	Supports Guaranteed Bandwidth No	
Supports Multicasting No	Supports Multicasting No	
Name MSAFD NetBIOS	Name MSAFD NetBIOS	[Serial]
(\Device\NetBT_Tcpip_{9B72052D-6E47-4A7A-891F-A896423C895F}) DATAGRAM 0	(\Device\NetBT_Tcpip_{7F6913D6-BEBA-41C6-8F2F-706719369B28}) SEQPACKET 2	Item Value
Connectionless Service Yes	Connectionless Service No	Name Communications Port (COM1)
Guarantees Delivery No	Guarantees Delivery Yes	Status OK
Guarantees Sequencing No	Guarantees Sequencing Yes	PNP Device ID ACPI\PNP0501\0
Maximum Address Size 20 bytes	Maximum Address Size 20 bytes	Maximum Input Buffer Size 0
Maximum Message Size 62.50 KB (64,000 bytes)	Maximum Message Size 62.50 KB (64,000 bytes)	Maximum Output Buffer Size No
Message Oriented Yes	Message Oriented Yes	Settable Baud Rate Yes
Minimum Address Size 20 bytes	Minimum Address Size 20 bytes	Settable Data Bits Yes
Pseudo Stream Oriented No	Pseudo Stream Oriented No	Settable Flow Control Yes
Supports Broadcasting Yes	Supports Broadcasting No	Settable Parity Yes
Supports Connect Data No	Supports Connect Data No	Settable Parity Check Yes
Supports Disconnect Data No	Supports Disconnect Data No	Settable Stop Bits Yes
		Settable RLSD Yes
		Supports RLSD Yes
		Supports 16 Bit Mode No
		Supports Special Characters No
		Baud Rate 9600
		Bits/Byte 8
		Stop Bits 1

Parity None
 Busy No
 Abort Read/Write on Error No
 Binary Mode Enabled Yes
 Continue Xmit on XOff No
 CTS Outflow Control No
 Discard NULL Bytes No
 DSR Outflow Control 0
 DSR Sensitivity 0
 DTR Flow Control Type Enable
 EOF Character 0
 Error Replace Character 0
 Error Replacement Enabled No
 Event Character 0
 Parity Check Enabled No
 RTS Flow Control Type Enable
 XOFF Character 19
 XOFFXMIT Threshold 512
 XON Character 17
 XONXMIT Threshold 2048
 XONXOFF InFlow Control 0
 XONXOFF OutFlow Control 0
 IRQ Channel IRQ 4
 I/O Port 0x000003F8-0x000003FF
 Driver c:\windows\system32\drivers\serial.sys
 (5.2.3790.0 (srv03_rtm.030324-2048), 76.00 KB (77,824 bytes), 3/25/2003 12:00 AM)

[Parallel]

Item	Value
Name	LPT1
PNP Device ID	ACPI\PNP0400\5&13237358&0
I/O Port	0x00000378-0x0000037F
Driver	c:\windows\system32\drivers\parport.sys
	(5.2.3790.0 (srv03_rtm.030324-2048), 76.50 KB (78,336 bytes), 3/24/2003 5:04 PM)

[Storage]

[Drives]

Item	Value
Drive A:	
Description	3 1/2 Inch Floppy Drive
Drive C:	
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	33.90 GB (36,405,055,488 bytes)
Free Space	30.41 GB (32,657,469,440 bytes)
Volume Name	
Volume Serial Number	5C9AEF37
Drive D:	
Description	CD-ROM Disc
Drive E:	
Description	Local Fixed Disk

Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive F:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive G:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive H:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive I:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive J:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive K:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive L:
 Description Local Fixed Disk

Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive M:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive W:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 320.50 GB (344,137,453,568 bytes)
 Free Space 259.89 GB (279,049,748,480 bytes)
 Volume Name Backup1
 Volume Serial Number 0064F62B

Drive X:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 320.50 GB (344,137,453,568 bytes)
 Free Space 259.89 GB (279,049,748,480 bytes)
 Volume Name Backup2
 Volume Serial Number 20880925

Drive Y:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 320.50 GB (344,137,453,568 bytes)
 Free Space 259.89 GB (279,049,748,480 bytes)

Volume Name Backup3
 Volume Serial Number 0CA397DD

Drive Z:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 320.50 GB (344,137,453,568 bytes)
 Free Space 259.89 GB (279,049,748,480 bytes)

Volume Name Backup4
 Volume Serial Number 78BAAC13

[Disks]

Item	Value
Description	\.\PHYSICALDRIVE10
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512

Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	47.95 GB (51,482,027,520 bytes)
Total Cylinders	6,259
Total Sectors	100,550,835
Total Tracks	1,596,045
Tracks/Cylinder	255
Partition Disk #10, Partition #0	
Partition Size	47.95 GB (51,481,995,264 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\.\PHYSICALDRIVE11
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	23.26 GB (24,971,950,080 bytes)
Total Cylinders	3,036
Total Sectors	48,773,340
Total Tracks	774,180
Tracks/Cylinder	255
Partition Disk #11, Partition #0	
Partition Size	23.26 GB (24,971,917,824 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\.\PHYSICALDRIVE12
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	320.51 GB (344,145,715,200 bytes)
Total Cylinders	41,840
Total Sectors	672,159,600
Total Tracks	10,669,200
Tracks/Cylinder	255
Partition Disk #12, Partition #0	
Partition Size	320.50 GB (344,137,457,664 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\.\PHYSICALDRIVE0

Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	101.74 GB (109,239,943,680 bytes)
Total Cylinders	13,281
Total Sectors	213,359,265
Total Tracks	3,386,655
Tracks/Cylinder	255
Partition Disk #0, Partition #0	
Partition Size	101.74 GB (109,239,911,424 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\.\PHYSICALDRIVE1
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	47.95 GB (51,482,027,520 bytes)
Total Cylinders	6,259
Total Sectors	100,550,835
Total Tracks	1,596,045
Tracks/Cylinder	255
Partition Disk #1, Partition #0	
Partition Size	47.95 GB (51,481,995,264 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\.\PHYSICALDRIVE2
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	23.26 GB (24,971,950,080 bytes)
Total Cylinders	3,036
Total Sectors	48,773,340
Total Tracks	774,180
Tracks/Cylinder	255
Partition Disk #2, Partition #0	
Partition Size	23.26 GB (24,971,917,824 bytes)

Partition Starting Offset	32,256 bytes
Description	\.\.\PHYSICALDRIVE3
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	320.51 GB (344,145,715,200 bytes)
Total Cylinders	41,840
Total Sectors	672,159,600
Total Tracks	10,669,200
Tracks/Cylinder	255
Partition Disk #3, Partition #0	
Partition Size	320.50 GB (344,137,457,664 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\.\PHYSICALDRIVE7
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	47.95 GB (51,482,027,520 bytes)
Total Cylinders	6,259
Total Sectors	100,550,835
Total Tracks	1,596,045
Tracks/Cylinder	255
Partition Disk #7, Partition #0	
Partition Size	47.95 GB (51,481,995,264 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\.\PHYSICALDRIVE8
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	23.26 GB (24,971,950,080 bytes)
Total Cylinders	3,036
Total Sectors	48,773,340
Total Tracks	774,180
Tracks/Cylinder	255

```

Partition Disk #8, Partition #0
Partition Size      23.26 GB (24,971,917,824 bytes)

Partition Starting Offset    32,256 bytes

Description        \\.\PHYSICALDRIVE9
Manufacturer       Not Available
Model             Not Available
Bytes/Sector      512
Media Loaded      Yes
Media Type        Fixed hard disk
Partitions        1
SCSI Bus          Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID    Not Available
Sectors/Track     63
Size              320.51 GB (344,145,715,200 bytes)
Total Cylinders   41,840
Total Sectors     672,159,600
Total Tracks      10,669,200
Tracks/Cylinder   255
Partition Disk #9, Partition #0
Partition Size    320.50 GB (344,137,457,664 bytes)

Partition Starting Offset    32,256 bytes

Description        \\.\PHYSICALDRIVE4
Manufacturer       Not Available
Model             Not Available
Bytes/Sector      512
Media Loaded      Yes
Media Type        Fixed hard disk
Partitions        1
SCSI Bus          Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID    Not Available
Sectors/Track     63
Size              47.95 GB (51,482,027,520 bytes)
Total Cylinders   6,259
Total Sectors     100,550,835
Total Tracks      1,596,045
Tracks/Cylinder   255
Partition Disk #4, Partition #0
Partition Size    47.95 GB (51,481,995,264 bytes)

Partition Starting Offset    32,256 bytes

Description        \\.\PHYSICALDRIVE5
Manufacturer       Not Available
Model             Not Available
Bytes/Sector      512
Media Loaded      Yes
Media Type        Fixed hard disk
Partitions        1
SCSI Bus          Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID    Not Available
Sectors/Track     63
Size              23.26 GB (24,971,950,080 bytes)
Total Cylinders   3,036

```

```

Total Sectors      48,773,340
Total Tracks       774,180
Tracks/Cylinder   255
Partition Disk #5, Partition #0
Partition Size    23.26 GB (24,971,917,824 bytes)

Partition Starting Offset    32,256 bytes

Description        \\.\PHYSICALDRIVE6
Manufacturer       Not Available
Model             Not Available
Bytes/Sector      512
Media Loaded      Yes
Media Type        Fixed hard disk
Partitions        1
SCSI Bus          Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID    Not Available
Sectors/Track     63
Size              320.51 GB (344,145,715,200 bytes)
Total Cylinders   41,840
Total Sectors     672,159,600
Total Tracks      10,669,200
Tracks/Cylinder   255
Partition Disk #6, Partition #0
Partition Size    320.50 GB (344,137,457,664 bytes)

Partition Starting Offset    32,256 bytes

Description        Disk drive
Manufacturer       (Standard disk drives)
Model             COMPAQ BDO36863AC SCSI Disk Device
Bytes/Sector      512
Media Loaded      Yes
Media Type        Fixed hard disk
Partitions        1
SCSI Bus          0
SCSI Logical Unit 0
SCSI Port 2
SCSI Target ID   0
Sectors/Track     63
Size              33.91 GB (36,413,314,560 bytes)
Total Cylinders   4,427
Total Sectors     71,119,755
Total Tracks      1,128,885
Tracks/Cylinder   255
Partition Disk #13, Partition #0
Partition Size    33.90 GB (36,405,057,024 bytes)

Partition Starting Offset    32,256 bytes

[SCSI]

Item      Value
Name      Smart Array 5300 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard
Status             OK
PNP Device ID    PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
Memory Address   0xF79C0000-0xF79FFFFF
Memory Address   0xF7800000-0xF7BFFFFF
I/O Port          0x00003400-0x000034FF
IRQ Channel      IRQ 24

```

```

Name      Memory Address 0xF7600000-0xF76FFFFF
I/O Port  I/O Port 0x00002400-0x000024FF
IRQ Channel IRQ 18
Driver   Driver  c:\windows\system32\drivers\hpqcissb.sys
(5.6.2.32 built by: WinDDK, 38.00 KB (38,912 bytes),
5/1/2003 8:30 PM)

Name      Compaq 64-bit/66MHz Dual Channel Wide
Ultra3 SCSI Adapter
Manufacturer       Adaptec
Status             OK
PNP Device ID    PCI\VEN_9005&DEV_00C0&SUBSYS_F6200E11&REV_0
1\3&267A616&0x10
I/O Port  I/O Port 0x00002800-0x000028FF
Memory Address   0xF75F0000-0xF75F0FFF
IRQ Channel      IRQ 31
Driver   Driver  c:\windows\system32\drivers\adpu160m.sys
( RTC_XP07 (lab01_n(storbuild).010917-1031), 99.63 KB
(102,016 bytes), 3/25/2003 12:00 AM)

Name      Compaq 64-bit/66MHz Dual Channel Wide
Ultra3 SCSI Adapter
Manufacturer       Adaptec
Status             OK
PNP Device ID    PCI\VEN_9005&DEV_00C0&SUBSYS_F6200E11&REV_0
1\3&267A616&0x11
I/O Port  I/O Port 0x00002B00-0x00002BFF
Memory Address   0xF77BF000-0xF77BFFFF
IRQ Channel      IRQ 31
Driver   Driver  c:\windows\system32\drivers\adpu160m.sys
( RTC_XP07 (lab01_n(storbuild).010917-1031), 99.63 KB
(102,016 bytes), 3/25/2003 12:00 AM)

Name      Smart Array 5300 Controller (Non-Miniport)
Manufacturer       Hewlett-Packard
Status             OK
PNP Device ID    PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&13C0B0C5&0x08
Memory Address   0xF7BC0000-0xF7BFFFFF
Memory Address   0xF7A00000-0xF7AFFFFF
I/O Port          0x00003000-0x000034FF
IRQ Channel      IRQ 26
Driver   Driver  c:\windows\system32\drivers\hpqcissb.sys
(5.6.2.32 built by: WinDDK, 38.00 KB (38,912 bytes),
5/1/2003 8:30 PM)

Name      Smart Array 5300 Controller (Non-Miniport)
Manufacturer       Hewlett-Packard
Status             OK
PNP Device ID    PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&13C0B0C5&0x08
Memory Address   0xF79C0000-0xF79FFFFF
Memory Address   0xF7800000-0xF7BFFFFF
I/O Port          0x00003400-0x000034FF
IRQ Channel      IRQ 24

```

```

Driver      c:\windows\system32\drivers\hpqcissb.sys
(5.6.2.32 built by: WinDDK, 38.00 KB (38,912 bytes),
5/1/2003 8:30 PM)

Name       Smart Array 5300 Controller (Non-Miniport)

Manufacturer      Hewlett-Packard
Status        OK
PNP Device ID
    PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&1070020&0&08
Memory Address 0xF7FC0000-0xF7FFFF
Memory Address 0x7E00000-0xF7FFFFFF
I/O Port 0x00004000-0x000044FF
IRQ Channel   IRQ 22
Driver      c:\windows\system32\drivers\hpqcissb.sys
(5.6.2.32 built by: WinDDK, 38.00 KB (38,912 bytes),
5/1/2003 8:30 PM)

Name       Smart Array 5300 Controller (Non-Miniport)

Manufacturer      Hewlett-Packard
Status        OK
PNP Device ID
    PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&1070020&0&10
Memory Address 0xF7DC0000-0xF7DFFFFF
Memory Address 0x7C00000-0xF7FFFFFF
I/O Port 0x00004400-0x000044FF
IRQ Channel   IRQ 20
Driver      c:\windows\system32\drivers\hpqcissb.sys
(5.6.2.32 built by: WinDDK, 38.00 KB (38,912 bytes),
5/1/2003 8:30 PM)

[IDE]

Item      Value
Name      CSB5 IDE Controller
Manufacturer ServerWorks
Status        OK
PNP Device ID
    PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_9
3\&267A616A&0&79
I/O Port 0x0002000-0x0000200F
Driver      c:\windows\system32\drivers\pciide.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 5.50 KB (5,632
bytes), 3/25/2003 12:00 AM)

Name      Primary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status        OK
PNP Device ID
    PCIIDE\IDECHANNEL\4&1024D5C6&0&0

I/O Port 0x000001F0-0x000001F7
I/O Port 0x000003F6-0x000003F6
IRQ Channel   IRQ 14
Driver      c:\windows\system32\drivers\atapi.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 89.00 KB (91,136
bytes), 3/25/2003 12:00 AM)

Name      Secondary IDE Channel

```

Manufacturer (Standard IDE ATA/ATAPI controllers)				Standard IDE ATA/ATAPI			
PNP Device ID PCIIDE\IDECHANNEL\4&1024D5C6&0&1							
I/O Port 0x00000170-0x00000177				ahal154x	Ahal154x	Not Available	Kernel Driver
I/O Port 0x00000376-0x00000376				No	Disabled	Stopped	OK
Driver c:\windows\system32\drivers\atapi.sys				Normal	No	No	
(5.2.3790.0 (srv03_rtm.030324-2048), 89.00 KB (91,136 bytes), 3/25/2003 12:00 AM)				No	Disabled	Stopped	OK
[Printing]							
Name Driver	Port Name	Server Name		aic78u2	aic78u2	Not Available	Kernel Driver
[Problem Devices]				No	Disabled	Stopped	OK
Device PNP Device ID			Error Code	Normal	No	No	
[USB]							
Device PNP Device ID				aliide	AliIide	Not Available	Kernel Driver
[Software Environment]				No	Disabled	Stopped	OK
[System Drivers]							
Name Description	File	Type		asyncmac	RAS Asynchronous Media Driver		
Started	Start Mode	State		c:\windows\system32\drivers\asyncmac.sys	Kernel Driver	No	Manual
Status	Error Control	Accept Pause		Stopped	OK	Normal	No
abiosdsk	Abiosdsk	Not Available	Kernel Driver	atapi	Standard IDE/ESDI Hard Disk Controller		
No	Disabled	Stopped	OK	c:\windows\system32\drivers\atapi.sys	Kernel Driver	Yes	Boot
Ignore	No	No		Running	OK	Normal	No
acpi	Microsoft ACPI Driver			atdisk	Atdisk	Not Available	Kernel Driver
c:\windows\system32\drivers\acpi.sys				No	Disabled	Stopped	OK
Kernel Driver	Yes	Boot		Ignore	No	No	
Running	OK	Normal	Yes	ati2mpad	c:\windows\system32\drivers\ati2mpad.sys	Kernel Driver	Yes
[System Drivers]				atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys	
Name Description	File	Type		Kernel Driver	No	Manual	
Started	Start Mode	State		Stopped	OK	Normal	No
Status	Error Control	Accept Pause		audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys	
abiosdsk	Abiosdsk	Not Available	Kernel Driver	Kernel Driver	Yes	Manual	
No	Disabled	Stopped	OK	Running	OK	Normal	No
Ignore	No	No		b57w2k	BCM5703 Gigabit Ethernet	c:\windows\system32\drivers\b57xp32.sys	
acpi	ACPIEC			Kernel Driver	Yes	Manual	
c:\windows\system32\drivers\acpiec.sys				Running	OK	Normal	No
Kernel Driver	No	Disabled		beep	Beep	c:\windows\system32\drivers\beep.sys	
Stopped	OK	Normal	No	Kernel Driver	Yes	System	
adpu160m	adpu160m			Running	OK	Normal	No
c:\windows\system32\drivers\adpu160m.sys				cbidf2k	cbidf2k	c:\windows\system32\drivers\cbidf2k.sys	
Kernel Driver	Yes	Boot		Kernel Driver	No	Disabled	
Running	OK	Normal	Yes	Stopped	OK	Normal	No
adpu320	adpu320	Not Available	Kernel Driver	cd20xrnt	cd20xrnt	Not Available	Kernel Driver
No	Disabled	Stopped	OK	No	Disabled	Stopped	OK
Normal	No	No		Normal	No	No	
afcnt	afcnt	Not Available	Kernel Driver	cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys	
No	Disabled	Stopped	OK	File System Driver	Yes	Disabled	
Normal	No	No		Running	OK	Normal	No
afd	AFD Networking Support Environment			Running	OK	Normal	Yes
c:\windows\system32\drivers\afd.sys							
Kernel Driver	Yes	Auto					
Running	OK	Normal	Yes				
Name Primary IDE Channel							
Manufacturer (Standard IDE ATA/ATAPI controllers)							
Status OK							
PNP Device ID							
PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_9							
3\&267A616A&0&79							
I/O Port 0x0002000-0x0000200F							
Driver c:\windows\system32\drivers\pciide.sys							
(5.2.3790.0 (srv03_rtm.030324-2048), 5.50 KB (5,632 bytes), 3/25/2003 12:00 AM)							
Name Secondary IDE Channel							

cdrom	CD-ROM Driver c:\windows\system32\drivers\cdrom.sys	Kernel Driver Running OK Normal No System Yes	Kernel Driver Running OK Normal No System Yes	Boot Normal No Yes		i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver c:\windows\system32\drivers\i8042prt.sys	Kernel Driver Running OK Normal No System Yes	Kernel Driver Normal No System Yes	
changer	Changer Not Available Kernel Driver No System Stopped OK		dpti2o	dpti2o Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No System Yes	iirsp	iirsp Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No System Yes	Kernel Driver Normal No System Yes	
clusdisk	Cluster Disk Driver c:\windows\system32\drivers\clusdisk.sys	Kernel Driver Stopped OK Normal No Disabled No	fastfat	Fastfat c:\windows\system32\drivers\fastfat.sys	File System Driver Running OK Normal No System Yes Disabled Yes	imapi	CD-Burning Filter Driver c:\windows\system32\drivers\imapi.sys	Kernel Driver Stopped OK Normal No System No	Kernel Driver Normal No System No System No	
cmdide	Cmdide Not Available Kernel Driver No Disabled Stopped OK Normal No No		fdc	Floppy Disk Controller Driver c:\windows\system32\drivers\fdc.sys	Kernel Driver Running OK Normal No Manual Yes	intelide	IntelIDE Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No System No	Kernel Driver Normal No System No System No	
cpqarray	Cpqarray Not Available Kernel Driver No Disabled Stopped OK Normal No No		fips	Fips c:\windows\system32\drivers\fips.sys	Kernel Driver Running OK Normal No System Yes	ipfilterdriver	IP Traffic Filter Driver c:\windows\system32\drivers\ipfltdrv.sys	Kernel Driver Stopped OK Normal No Manual No	Kernel Driver Normal No Manual No No	
cpqarry2	Cpqarry2 Not Available Kernel Driver No Disabled Stopped OK Normal No No		flpydisk	Floppy Disk Driver c:\windows\system32\drivers\flpydisk.sys	Kernel Driver Running OK Normal No Manual Yes	ipinip	IP in IP Tunnel Driver c:\windows\system32\drivers\ipinip.sys	Kernel Driver Stopped OK Normal No Manual No	Kernel Driver Normal No Manual No No	
cpqcissm	cpqcissm c:\windows\system32\drivers\cpqcissm.sys Kernel Driver Yes Boot Running OK Normal No Yes		ftdisk	Volume Manager Driver c:\windows\system32\drivers\ftdisk.sys	Kernel Driver Running OK Normal No Boot Yes	ipnat	IP Network Address Translator c:\windows\system32\drivers\ipnat.sys	Kernel Driver Stopped OK Normal No Manual No	Kernel Driver Normal No Manual No No	
cpqfcalm	cpqfcalm Not Available Kernel Driver No Disabled Stopped OK Normal No No		gpc	Generic Packet Classifier c:\windows\system32\drivers\msgpc.sys	Kernel Driver Running OK Normal No Manual Yes	ipsec	IPSEC driver c:\windows\system32\drivers\ipsec.sys	Kernel Driver Running OK Normal No System Yes	Kernel Driver Normal No System Yes	
crcdisk	CRC Disk Filter Driver c:\windows\system32\drivers\crcdisk.sys	Kernel Driver Yes Boot Running OK Normal No Yes	hpn	hpn Not Available Kernel Driver No Disabled Stopped OK Normal No No		ipsraiden	ipsraiden Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No No	Kernel Driver Normal No No	
dac960nt	dac960nt Not Available Kernel Driver No Disabled Stopped OK Normal No No		hpqci ssb Driver	Smart Array Controllers Non-Miniport Bus c:\windows\system32\drivers\hpqci ssb.sys	Kernel Driver Running OK Normal No Boot Yes	isapnp	PnP ISA/EISA Bus Driver c:\windows\system32\drivers\isapnp.sys	Kernel Driver Running OK Critical No Boot Yes	Kernel Driver Normal No No Yes	
dellcerc	dellcerc Not Available Kernel Driver No Disabled Stopped OK Normal No No		hpqci ssd Driver	Smart Array Controllers Non-Miniport Disk c:\windows\system32\drivers\hpqci ssd.sys	Kernel Driver Running OK Normal No Boot Yes	kbdclass	Keyboard Class Driver c:\windows\system32\drivers\kbdclass.sys	Kernel Driver Running OK Normal No System Yes	Kernel Driver Normal No System Yes	
dfsdriver	DfsDriver c:\windows\system32\drivers\dfs.sys File System Driver Yes Boot Running OK Normal No Yes		hpt3xx	hpt3xx Not Available Kernel Driver No Disabled Stopped OK Normal No No		ksecd d	KSecDD c:\windows\system32\drivers\ksecd.sys	Kernel Driver Running OK Normal No Boot Yes	Kernel Driver Normal No No Yes	
disk	Disk Driver c:\windows\system32\drivers\disk.sys	Kernel Driver Yes Boot Running OK Normal No Yes	http	HTTP c:\windows\system32\drivers\http.sys	Kernel Driver Stopped OK Normal No Manual No	lp6nds35	lp6nds35 Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No No	Kernel Driver Normal No No	
dmboot	dmboot c:\windows\system32\drivers\dmboot.sys	Kernel Driver No Disabled Stopped OK Normal No No	i20mgmt	i20mgmt Not Available Kernel Driver No System Stopped OK Normal No No		mnmdd	mnmdd c:\windows\system32\drivers\mnmdd.sys	Kernel Driver Running OK Ignore No System Yes	Kernel Driver Normal No System Yes	
dmio	Logical Disk Manager Driver c:\windows\system32\drivers\dmio.sys	Kernel Driver Yes Boot Running OK Normal No Yes	i2omp	i2omp Not Available Kernel Driver No Disabled Stopped OK Normal No No						
dmload	dmload c:\windows\system32\drivers\dmload.sys									

modem	Modem c:\windows\system32\drivers\modem.sys	Kernel Driver Stopped OK	No Ignore	Manual No	No
mouclass	Mouse Class Driver c:\windows\system32\drivers\mouclass.sys	Kernel Driver Running OK	Yes Normal	System No	Yes
mountmgr	Mount Point Manager c:\windows\system32\drivers\mountmgr.sys	Kernel Driver Running OK	Yes Normal	Boot No	Yes
mraid35x	mraid35x Not Available No Normal	Kernel Driver Disabled No	Stopped OK	OK No	OK
mrxdav	WebDav Client Redirector c:\windows\system32\drivers\mrxdav.sys	File System Driver Stopped	No OK	Manual Normal	No No
mrxsmb	MRXSMB c:\windows\system32\drivers\mrxsmb.sys	File System Driver Running	Yes OK	System Normal	Yes No
msfs	Msfs c:\windows\system32\drivers\msfs.sys	File System Driver Running	Yes OK	System Normal	Yes No
mup	Mup c:\windows\system32\drivers\mup.sys	File System Driver Running	Yes OK	Boot Normal	Yes No
ndis	NDIS System Driver c:\windows\system32\drivers\ndis.sys	Kernel Driver Running	Yes OK	Boot Normal	Yes No
ndistapi	Remote Access NDIS TAPI Driver c:\windows\system32\drivers\ndistapi.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No
ndisui0	NDIS Usermode I/O Protocol c:\windows\system32\drivers\ndisui0.sys	Kernel Driver Stopped	No OK	Manual Normal	No No
ndiswan	Remote Access NDIS WAN Driver c:\windows\system32\drivers\ndiswan.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No
ndproxy	NDIS Proxy c:\windows\system32\drivers\ndproxy.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No
netbios	NetBIOS Interface c:\windows\system32\drivers\netbios.sys	File System Driver Running	Yes OK	System Normal	Yes No
netbt	NetBios over Tcpip c:\windows\system32\drivers\netbt.sys	Kernel Driver Running	Yes OK	System Normal	Yes No
nfrd960	nfrd960 Not Available No Normal	Kernel Driver Disabled No	Stopped OK	OK No	OK
npfs	Npfs c:\windows\system32\drivers\npfs.sys	File System Driver Running	Yes OK	System Normal	Yes No
ntfs	Ntfs c:\windows\system32\drivers\ntfs.sys	File System Driver Running	Yes OK	Disabled Normal	Yes No
null	Null c:\windows\system32\drivers\null.sys	Kernel Driver Running	Yes OK	System Normal	Yes No
parport	Parallel port driver c:\windows\system32\drivers\parport.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No
partmgr	Partition Manager c:\windows\system32\drivers\partmgr.sys	Kernel Driver Running	Yes OK	Boot Normal	Yes No
parvdm	Parvdm c:\windows\system32\drivers\parvdm.sys	Kernel Driver Running	Yes OK	Auto Ignore	Yes No
pci	PCI Bus Driver c:\windows\system32\drivers\pci.sys	Kernel Driver Running	Yes OK	Boot Critical	Yes No
pcide	PCIide c:\windows\system32\drivers\pcide.sys	Kernel Driver Running	Yes OK	Boot Normal	Yes No
pcmcia	Pcmcia c:\windows\system32\drivers\pcmcia.sys	Kernel Driver Stopped	No OK	Disabled Normal	Yes No
pdcomp	PDCOMP Not Available No Ignore	Kernel Driver Manual No	Stopped No	OK No	OK
pdframe	PDFRAME Not Available No Ignore	Kernel Driver Manual No	Stopped No	OK No	OK
pdrframe	PDRFRAME Not Available No Ignore	Kernel Driver Manual No	Stopped No	OK No	OK
perc2	perc2 Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
perc2hib	perc2hib Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
pptpminiport	WAN Miniport (PPTP) c:\windows\system32\drivers\raspppt.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No
processor	Processor Driver c:\windows\system32\drivers\processr.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No
ptilink	Direct Parallel Link Driver c:\windows\system32\drivers\ptilink.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No
ql1080	ql1080 Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
ql10wnt	ql10wnt Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
ql12160	ql12160 Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
ql1240	ql1240 Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
ql1280	ql1280 Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
ql1290	ql1290 Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
ql12200	ql12200 Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
ql12300	ql12300 Not Available No Normal	Kernel Driver Disabled No	Stopped No	OK No	OK
rasacd	Remote Access Auto Connection Driver c:\windows\system32\drivers\rasacd.sys	Kernel Driver Running	Yes OK	System Normal	Yes No
rasl2tp	WAN Miniport (L2TP) c:\windows\system32\drivers\rasl2tp.sys	Kernel Driver Running	Yes OK	Manual Normal	Yes No

System Configuration					Driver Status					Performance Metrics					
Category		Type		Status	Driver Name		Status	Type		Driver Name		Status		Performance	
rasppoe	Running	OK	Normal	No	Yes	srv	Srv	c:\windows\system32\drivers\srv.sys	File System Driver	Yes	Manual	Stopped	Kernel Driver	No	
	Remote Access	PPPOE Driver	c:\windows\system32\drivers\rasppoe.sys	Kernel Driver	Yes	Manual	Running	OK	Normal	No	Yes	OK	Stopped	Normal	
	Kernel Driver	Yes	Manual	Normal	No	Yes	swenum	Software Bus Driver	c:\windows\system32\drivers\swenum.sys	Kernel Driver	Yes	Manual	Stopped	Kernel Driver	No
raspti	Running	OK	Normal	No	Yes	symc810	symc810	Not Available	Kernel Driver	Running	OK	Normal	No	Yes	Manual
	Direct Parallel	c:\windows\system32\drivers\raspti.sys	Kernel Driver	Yes	Manual	symc8xx	symc8xx	Not Available	Kernel Driver	Normal	No	Disabled	Stopped	Kernel Driver	No
	Kernel Driver	Yes	Manual	Normal	No	Yes	symmipi	symmipi	Not Available	Kernel Driver	Normal	No	Normal	Kernel Driver	Yes
rdbss	Rdbss	c:\windows\system32\drivers\rdbss.sys	File System Driver	Yes	System	sym_hi	sym_hi	Not Available	Kernel Driver	Normal	No	Normal	Normal	VGA Display Controller.	System
	File System Driver	Yes	System	Normal	No	Yes	sym_u3	sym_u3	Not Available	Kernel Driver	No	Disabled	Stopped	c:\windows\system32\drivers\vga.sys	Ignore
	Kernel Driver	Yes	System	Ignore	No	Yes	tcpip	TCP/IP Protocol Driver	c:\windows\system32\drivers\tcpip.sys	Kernel Driver	Normal	No	Normal	Kernel Driver	Yes
rdpcdd	RDP CDD	c:\windows\system32\drivers\rdpcdd.sys	Kernel Driver	Yes	System	tdpipe	TDPIPE	c:\windows\system32\drivers\tdpipe.sys	Kernel Driver	Normal	No	Normal	Normal	Storage volumes	Normal
	Kernel Driver	Yes	System	Normal	No	Yes	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	No	Manual	Normal	Storage volumes	Normal
	Kernel Driver	Yes	System	Ignore	No	Yes	termdd	Terminal Device Driver	c:\windows\system32\drivers\termdd.sys	Kernel Driver	Normal	No	Normal	Storage volumes	Normal
rdpdr	Terminal Server Device Redirector	c:\windows\system32\drivers\rdpdr.sys	Kernel Driver	Yes	Manual	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Normal	Remote Access IP ARP Driver	Normal
	Kernel Driver	Yes	Manual	Normal	No	Yes	termdd	Terminal Device Driver	c:\windows\system32\drivers\termdd.sys	Kernel Driver	No	Manual	Normal	Remote Access IP ARP Driver	Normal
	Kernel Driver	Yes	Manual	Ignore	No	Yes	termdd	Terminal Device Driver	c:\windows\system32\drivers\termdd.sys	Kernel Driver	Normal	No	Normal	Remote Access IP ARP Driver	Normal
rdpwd	RDPWD	c:\windows\system32\drivers\rdpwd.sys	Kernel Driver	Yes	Manual	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Normal	Network Load Balancing	Normal
	Kernel Driver	Yes	Manual	Normal	No	Yes	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	No	Manual	Normal	Network Load Balancing	Normal
	Kernel Driver	Yes	Manual	Ignore	No	Yes	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Network Load Balancing	Normal
redbook	Digital CD Audio Playback Filter	c:\windows\system32\drivers\redbook.sys	Kernel Driver	Yes	System	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Normal	[Signed Drivers]	Normal
	Kernel Driver	Yes	System	Normal	No	Yes	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	No	Manual	Normal	[Signed Drivers]	Normal
	Kernel Driver	Yes	System	Ignore	No	Yes	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	[Signed Drivers]	Normal
secdrv	Secdrv	c:\windows\system32\drivers\secdrv.sys	Kernel Driver	No	Manual	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Normal	Device Name	Signed
	Kernel Driver	No	Manual	Normal	No	No	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Device Name	Signed
	Kernel Driver	No	Manual	Ignore	No	No	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Device Name	Signed
serenum	Serenum Filter	c:\windows\system32\drivers\serenum.sys	Kernel Driver	Yes	Manual	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Normal	Driver Version	Driver Date
	Kernel Driver	Yes	Manual	Normal	No	Yes	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	No	Manual	Normal	Driver Version	Driver Date
	Kernel Driver	Yes	Manual	Ignore	No	Yes	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Driver Version	Driver Date
serial	Serial port driver	c:\windows\system32\drivers\serial.sys	Kernel Driver	Yes	System	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Normal	Device ID	Device ID
	Kernel Driver	Yes	System	Normal	No	Yes	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	No	Manual	Normal	Device ID	Device ID
	Kernel Driver	Yes	System	Ignore	No	Yes	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Device ID	Device ID
sfloppy	Sfloppy	c:\windows\system32\drivers\sfloppy.sys	Kernel Driver	No	System	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Normal	Not Available	Not Available
	Kernel Driver	No	System	Normal	No	No	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	No	Manual	Normal	Not Available	Not Available
	Kernel Driver	No	System	Ignore	No	No	tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	Normal	No	Normal	Not Available	Not Available
simbad	Simbad	Not Available	Kernel Driver	Normal	No	No	ultra	ultra	Not Available	Kernel Driver	Normal	No	Normal	ACPI Multiprocessor	PC
	Kernel Driver	Normal	No	Normal	No	No	ultra	ultra	Not Available	Kernel Driver	No	Normal	Normal	ACPI Multiprocessor	PC
	Kernel Driver	Normal	No	Normal	No	No	ultra	ultra	Not Available	Kernel Driver	No	Normal	Normal	ACPI Multiprocessor	PC
sparrow	Sparrow	Not Available	Kernel Driver	No	No	No	update	ultra	Not Available	Kernel Driver	Normal	No	Normal	Processor	No
	Kernel Driver	No	No	Normal	No	No	update	ultra	Not Available	Kernel Driver	No	Normal	Normal	Processor	No
	Kernel Driver	No	No	Normal	No	No	update	ultra	Not Available	Kernel Driver	No	Normal	Normal	Processor	No
usbhub	USB2 Enabled Hub	c:\windows\system32\drivers\usbhub.sys	Kernel Driver	Normal	No	No	update	ultra	Not Available	Kernel Driver	Normal	No	Normal	Processor	No
	Kernel Driver	Normal	No	Normal	No	No	update	ultra	Not Available	Kernel Driver	No	Normal	Normal	Processor	No
	Kernel Driver	Normal	No	Normal	No	No	update	ultra	Not Available	Kernel Driver	No	Normal	Normal	Processor	No

Processor No PROCESSOR 5.2.3790.0
 10/1/2002 (Standard processor types)
 cpu.inf Not Available
 ACPI\GENUINEINTEL_
 _X86_FAMILY_15_MODEL_2_2
 Processor No PROCESSOR 5.2.3790.0
 10/1/2002 (Standard processor types)
 cpu.inf Not Available
 ACPI\GENUINEINTEL_
 _X86_FAMILY_15_MODEL_2_3
 PCI bus No SYSTEM 5.2.3790.0
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0A03\0
 ServerWorks (RCC) CMIC_LE Processor to PCI Bridge(*)
 No SYSTEM 5.2.3790.0
 10/1/2002 ServerWorks (RCC) machine.inf
 Not Available
 PCI\VEN_1166&DEV_0014&SUBSYS_00000000&REV_3
 2\&267A616A&0&00
 ServerWorks (RCC) CMIC_LE Processor to PCI Bridge(*)
 No SYSTEM 5.2.3790.0
 10/1/2002 ServerWorks (RCC) machine.inf
 Not Available
 PCI\VEN_1166&DEV_0014&SUBSYS_00000000&REV_0
 0\&267A616A&0&01
 ServerWorks (RCC) CMIC_LE Processor to PCI Bridge(*)
 No SYSTEM 5.2.3790.0
 10/1/2002 ServerWorks (RCC) machine.inf
 Not Available
 PCI\VEN_1166&DEV_0014&SUBSYS_00000000&REV_0
 0\&267A616A&0&02
 Smart Array 5300 Controller (Non-Miniport) No
 SCSI\ADAPTER 5.6.59.32 4/8/2003
 Hewlett-Packard oem1.inf Not Available
 PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
 2\&267A616A&0&08
 Smart Array Logical Volume No DISKDRIVE
 5.6.56.32 4/8/2003 Hewlett-Packard
 oem1.inf Not Available
 HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
 \4&E595B43&0000000000000000
 Compaq 64-bit/66MHz Dual Channel Wide Ultra3 SCSI
 Adapter No SCSI\ADAPTER 5.2.3790.0
 10/1/2002 Adaptec pnpscsi.inf Not Available
 PCI\VEN_9005&DEV_00C0&SUBSYS_F6200E11&REV_0
 1\&267A616A&0&10
 Disk drive No DISKDRIVE 5.2.3790.0
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_COMPAQ&PROD_BD036863AC&REV_HP
 B3\4&E88F65D&0&000
 Compaq StorageWorks/ProLiant Storage Subsystem No
 SYSTEM 5.2.3790.0 10/1/2002
 Compaq scsidev.inf Not Available
 SCSI\PROPROCESSOR&VEN_COMPAQ&PROD_PROLIANT_4L2
 I&REV_1.70\4&E88F65D&0&0F0
 Compaq 64-bit/66MHz Dual Channel Wide Ultra3 SCSI
 Adapter No SCSI\ADAPTER 5.2.3790.0
 10/1/2002 Adaptec pnpscsi.inf Not Available
 PCI\VEN_9005&DEV_00C0&SUBSYS_F6200E11&REV_0

PCI\VEN_9005&DEV_00C0&SUBSYS_F6200E11&REV_0
 1\3&267A616A&0&11
 RAGE XL PCI Family (Microsoft Corporation) No
 DISPLAY 5.10.2600.6014 8/8/2001 ATI
 Technologies Inc. atiixpad.inf Not Available
 PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2
 7\3&267A616A&0&18
 Default Monitor No MONITOR 5.1.2001.0
 6/6/2001 (Standard monitor types)
 monitor.inf Not Available
 DISPLAY\DEFAULT_MONITOR\4&89B5141&0&8000000
 0&00&03
 BCM5703 Gigabit Ethernet No NET
 2.91.0.0 10/1/2002 Narrowcom netb57xp.inf
 Not Available
 PCI\VEN_14E4&DEV_16A6&SUBSYS_00BB0E11&REV_0
 2\3&267A616A&0&20
 Compaq Advanced System Management Controller No
 SYSTEM 5.2.3790.0 10/1/2002
 Compaq machine.inf Not Available
 PCI\VEN_0E11&DEV_A0F0&SUBSYS_B0F30E11&REV_0
 0\3&267A616A&0&28
 PCI standard ISA bridge No SYSTEM
 5.2.3790.0 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_1166&DEV_0201&SUBSYS_00000000&REV_9
 3\3&267A616A&0&78
 ISAPNP Read Data Port No SYSTEM
 5.2.3790.0 10/1/2002 (Standard
 system devices) machine.inf Not Available
 ISAPNP\READDATAPORT\0
 Motherboard resources No SYSTEM
 5.2.3790.0 10/1/2002 (Standard
 system devices) machine.inf Not Available
 ACPI\PNP0C02\0
 Programmable interrupt controller No
 SYSTEM 5.2.3790.0 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 ACPI\PNP0000\4&35118DFF&0
 System timer No SYSTEM 5.2.3790.0
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0100\4&35118DFF&0
 Direct memory access controller No
 SYSTEM 5.2.3790.0 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 ACPI\PNP0200\4&35118DFF&0
 System speaker No SYSTEM 5.2.3790.0
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0800\4&35118DFF&0
 Standard 101/102-Key or Microsoft Natural PS/2
 Keyboard No KEYBOARD 5.2.3790.0
 10/1/2002 (Standard keyboards)
 keyboard.inf Not Available
 ACPI\PNP0303\4&35118DFF&0
 PS/2 Compatible Mouse No MOUSE
 5.2.3790.0 10/1/2002 Microsoft
 msmouse.inf Not Available
 ACPI\PNP0F13\4&35118DFF&0

Extended IO Bus No SYSTEM 5.2.3790.0
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0A06\4&35118DFF&0
 Printer Port No PORTS 5.2.3790.0
 10/1/2002 (Standard port types)
 msports.inf Not Available
 ACPI\PNP0400\5&13237358&0
 Printer Port Logical Interface No
 SYSTEM 5.2.3790.0 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 LPTENUM\MICROSOFTRAWPORT\6&BCCF519&0&LPT1
 Communications Port No PORTS 5.2.3790.0
 10/1/2002 (Standard port types)
 msports.inf Not Available
 ACPI\PNP0501\0
 Standard floppy disk controller No FDC
 5.2.3790.0 10/1/2002 (Standard
 floppy disk controllers) fdc.inf Not Available
 ACPI\PNP0700\5&13237358&0
 Floppy disk drive No FLOPPYDISK
 5.2.3790.0 10/1/2002 (Standard
 floppy disk drives) flpdisk.inf Not Available
 FDC\GENERIC_FLOPPY_DRIVE\6&1C650B5D&0&0
 CS5B IDE Controller No HDC 5.2.3790.0
 10/1/2002 ServerWorks mshdc.inf Not Available
 Available PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_9
 3\3&267A616A&0&79
 Primary IDE Channel No HDC 5.2.3790.0
 10/1/2002 (Standard IDE ATA/ATAPI
 controllers) mshdc.inf Not Available
 PCIIDE\IDECHANNEL\4&1024D5C6&0&0
 CD-ROM Drive No CDROM 5.2.3790.0
 10/1/2002 (Standard CD-ROM drives)
 cdrom.inf Not Available
 IDE\CDROMCOMPAQ_CRD-
 8402B 1.03_\30323030302F2F3
 53031202020202020202020
 Secondary IDE Channel No HDC
 5.2.3790.0 10/1/2002 (Standard IDE
 ATA/ATAPI controllers) mshdc.inf Not Available
 PCIIDE\IDECHANNEL\4&1024D5C6&0&1
 Serverworks Champion CS5 - SouthBridge 5 LPC No
 SYSTEM 5.2.3790.0 10/1/2002
 ServerWorks (RCC) machine.inf Not Available
 Available PCI\VEN_1166&DEV_0225&SUBSYS_00000000&REV_0
 0\3&267A616A&0&7B
 ServerWorks Grand Champion CIOB_X2 - I/O Bridge 133
 Mhz No SYSTEM 5.2.3790.0
 10/1/2002 ServerWorks (RCC) machine.inf
 Not Available
 PCI\VEN_1166&DEV_0101&SUBSYS_00000000&REV_0
 5\3&267A616A&0&88
 ServerWorks Grand Champion CIOB_X2 - I/O Bridge 133
 Mhz No SYSTEM 5.2.3790.0
 10/1/2002 ServerWorks (RCC) machine.inf
 Not Available
 PCI\VEN_1166&DEV_0101&SUBSYS_00000000&REV_0
 5\3&267A616A&0&8A

PCI bus	No	SYSTEM	5.2.3790.0
	10/1/2002	(Standard system devices)	
machine.inf	Not Available		
ACPI\PNP0A03\1			
Smart Array 5300 Controller (Non-Miniport)	No		
SCSIADAPTER	5.6.59.32 4/8/2003		
Hewlett-Packard	oem0.inf Not Available		
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0			
2\3&13C0B0C5&0&08			
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&2D73AEC0&0&00000400000000		
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&2D73AEC0&0&01000400000000		
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&2D73AEC0&0&02000400000000		
Smart Array 5300 Controller (Non-Miniport)	No		
SCSIADAPTER	5.6.59.32 4/8/2003		
Hewlett-Packard	oem0.inf Not Available		
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0			
2\3&13C0B0C5&0&10			
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&E6AAC0F&0&00000400000000		
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&E6AAC0F&0&01000400000000		
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&E6AAC0F&0&02000400000000		
PCI bus	No	SYSTEM	5.2.3790.0
	10/1/2002	(Standard system devices)	
machine.inf	Not Available		
ACPI\PNP0A03\2			
Smart Array 5300 Controller (Non-Miniport)	No		
SCSIADAPTER	5.6.59.32 4/8/2003		
Hewlett-Packard	oem0.inf Not Available		
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0			
2\3&1070020&0&08			
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&33332AB6&0&00000400000000		
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&33332AB6&0&01000400000000		

Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&33332AB6&0&02000400000000		
Smart Array 5300 Controller (Non-Miniport)	No		
SCSIADAPTER	5.6.59.32 4/8/2003		
Hewlett-Packard	oem0.inf Not Available		
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0			
2\3&1070020&0&010			
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&16A16360&0&01000400000000		
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&16A16360&0&02000400000000		
Smart Array Logical Volume	No	DISKDRIVE	
5.6.56.32	4/8/2003	Hewlett-Packard	
oem1.inf	Not Available		
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&16A16360&0&03000400000000		
ACPI Thermal Zone	No	SYSTEM	5.2.3790.0
	10/1/2002	(Standard system devices)	
machine.inf	Not Available		
ACPI\THERMALZONE\THM0			
ACPI Fixed Feature Button	No	SYSTEM	
5.2.3790.0	10/1/2002	(Standard	
system devices)	machine.inf	Not Available	
ACPI\FIXEDBUTTON\2&DABA3FF&0			
Logical Disk Manager	No	SYSTEM	
5.2.3790.0	10/1/2002	(Standard	
system devices)	machine.inf	Not Available	
ROOT\DMIO\0000			
Volume Manager	No	SYSTEM	5.2.3790.0
	10/1/2002	(Standard system devices)	
machine.inf	Not Available		
ROOT\FTDISK\0000			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATUREA70ECF			
COFFSET7E00LENGTH196F34C400			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F1			
BOFFSET7E00LENGTHHBFC90E800			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F1			
9OFFSET7E00LENGTH5D0713A00			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F1			
E0FFSET7E00LENGTH502030E000			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURE477047			
6OFFSET7E00LENGTH879E91600			
AFD Networking Support Environment	Not Available		
LEGACYDRIVER	Not Available		
Available	Not Available		
Not Available	Not Available		
Available	Not Available		
ROOT\LEGACY_AFD\0000			
Beep	Not Available		
Available	Not Available		
Not Available	Not Available		
Available	Not Available		
ROOT\LEGACY_BEEP\0000			
cpqciissm	Not Available		
Available	Not Available		
Available	Not Available		
ROOT\LEGACY_C_PQCISSM\0000			
CRC Disk Filter Driver	Not Available		
LEGACYDRIVER	Not Available		
Available	Not Available		

Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F0			
2OFFSET7E00LENGTHHBFC90E800			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F0			
3OFFSET7E00LENGTH5D0713A00			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F0			
0OFFSET7E00LENGTH502030E000			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F1			
F0FFSET7E00LENGTHHBFC90E800			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F1			
D0FFSET7E00LENGTH502030E000			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F1			
5OFFSET7E00LENGTH5D0713A00			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F1			
A0FFSET7E00LENGTH502030E000			
Generic volume	No	VOLUME	5.2.3790.0
	10/1/2002	Microsoft volume.inf	Not Available
Available			
STORAGE\VOLUME\1&30A96598&0&SIGNATURECB64F1			
6OFFSET7E00LENGTH879E91600			
AFD Networking Support Environment	Not Available		
LEGACYDRIVER	Not Available		
Available	Not Available		
Not Available	Not Available		
Available	Not Available		
ROOT\LEGACY_AFD\0000			
Beep	Not Available		
Available	Not Available		
Not Available	Not Available		
Available	Not Available		
ROOT\LEGACY_BEEP\0000			
cpqciissm	Not Available		
Available	Not Available		
Available	Not Available		
ROOT\LEGACY_C_PQCISSM\0000			
CRC Disk Filter Driver	Not Available		
LEGACYDRIVER	Not Available		
Available	Not Available		

Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_CRCDISK\0000		
dmboot	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_DMBOOT\0000	
dmload	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_DMLOAD\0000	
Fips	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_FIPS\0000	
Generic Packet Classifier	Not Available		
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_GPC\0000		
IPSEC driver	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	Not Available	
	ROOT\LEGACY_IPSEC\0000		
ksecdd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_KSECDD\0000	
mnmdd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_MNMDD\0000	
mountmgr	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_MOUNTMGR\0000	
NDIS System Driver	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	Not Available	
	ROOT\LEGACY_NDIS\0000		
Remote Access NDIS TAPI Driver	Not Available		
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISTAPI\0000		
NDIS Usermode I/O Protocol	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_NDISUIO\0000	
NDProxy	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_NDPROXY\0000	
NetBios over Tcpip	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	Not Available	
	ROOT\LEGACY_NETBT\0000		
Null	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_NULL\0000	
Partition Manager	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	Not Available	
	ROOT\LEGACY_PARTMGR\0000		

Parvdm	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_PARVDM\0000		
Remote Access Auto Connection	Driver	Not Available	
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_RASACD\0000		
RDP CDD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_RDP CDD\0000		
RDPWD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_RDPWD\0000		
TCP/IP Protocol	Driver	Not Available	
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_TCPIP\0000		
TDTCP	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_TDTCP\0000		
VGA Display Controller	.	Not Available	
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_VOLSNAP\0000		
Remote Access IP ARP	Driver	Not Available	
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
	Available	ROOT\LEGACY_WANARP\0000	
Audio Codecs	No	MEDIA	5.2.3790.0
	10/1/2002	(Standard system devices)	
	wave.inf	Not Available	
	ROOT\MEDIA\MS_MMACM		
Legacy Audio Drivers	No	MEDIA	
	5.2.3790.0	10/1/2002	(Standard
system devices)	wave.inf	Not Available	
	ROOT\MEDIA\MS_MMDRV		
Media Control Devices	No	MEDIA	
	5.2.3790.0	10/1/2002	(Standard
system devices)	wave.inf	Not Available	
	ROOT\MEDIA\MS_MMCCI		
Legacy Video Capture	Devices	No	MEDIA
	5.2.3790.0	10/1/2002	(Standard
system devices)	wave.inf	Not Available	
	ROOT\MEDIA\MS_MMVCD		
Video Codecs	No	MEDIA	5.2.3790.0
	10/1/2002	(Standard system devices)	
	wave.inf	Not Available	
	ROOT\MEDIA\MS_MMVID		
WAN Miniport (L2TP)	No	NET	5.2.3790.0
	10/1/2002	Microsoft	netrasa.inf
	Available	ROOT\MS_L2TPMINIPORT\0000	
WAN Miniport (IP)	No	NET	5.2.3790.0
	10/1/2002	Microsoft	netrasa.inf
	Available	ROOT\MS_NDISWANIP\0000	

WAN Miniport (PPPOE)	No	NET	
	5.2.3790.0	10/1/2002	Microsoft
	netrasa.inf	Not Available	
	ROOT\MS_PPPOEMINIPORT\0000		
WAN Miniport (PPTP)	No	NET	5.2.3790.0
	10/1/2002	Microsoft	netrasa.inf
	Available	ROOT\MS_PPTPMINIPORT\0000	
Direct Parallel	No	NET	5.2.3790.0
	10/1/2002	Microsoft	netrasa.inf
	Available	ROOT\MS_PTMINIPORT\0000	
Terminal Server Device	Redirector	No	
	SYSTEM	5.2.3790.0	10/1/2002
	(Standard system devices)	machine.inf	
	Not Available	ROOT\RDPDR\0000	
Terminal Server Keyboard	Driver	No	
	SYSTEM	5.2.3790.0	10/1/2002
	(Standard system devices)	machine.inf	
	Not Available	ROOT\RDP_KBD\0000	
Terminal Server Mouse	Driver	No	SYSTEM
	5.2.3790.0	10/1/2002	(Standard
system devices)	machine.inf	Not Available	
	ROOT\RDP_MOU\0000		
Plug and Play Software	Device Enumerator	No	
	SYSTEM	5.2.3790.0	10/1/2002
	(Standard system devices)	machine.inf	
	Not Available	ROOT\SYSTEM\0000	
Microcode Update	Device	No	SYSTEM
	5.2.3790.0	10/1/2002	(Standard
system devices)	machine.inf	Not Available	
	ROOT\SYSTEM\0001		
[Environment Variables]			
Variable	Value	User Name	
ClusterLog	C:\WINDOWS\Cluster\cluster.log		
	<SYSTEM>		
ComSpec	%SystemRoot%\system32\cmd.exe	<SYSTEM>	
NUMBER_OF_PROCESSORS	4	<SYSTEM>	
OS	Windows_NT	<SYSTEM>	
Path	%SystemRoot%\system32;%SystemRoot%;		
	oot\System32\Wbem:C:\Program Files\Microsoft SQL		
Server\80\Tools\BINN;C:\Program Files\Microsoft SQL			
Server\MYSQL\Binn	<SYSTEM>		
PATHEXT	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF		
	;WSH	<SYSTEM>	
PROCESSOR_ARCHITECTURE	x86	<SYSTEM>	
PROCESSOR_IDENTIFIER	x86 Family 15 Model 2	<SYSTEM>	
Stepping	7, GenuineIntel	<SYSTEM>	
PROCESSOR_LEVEL	15	<SYSTEM>	
PROCESSOR_REVISION	0207	<SYSTEM>	
TEMP	%SystemRoot%\TEMP	<SYSTEM>	
TMP	%SystemRoot%\TEMP	<SYSTEM>	
windir	%SystemRoot%	<SYSTEM>	
TEMP	%USERPROFILE%\Local Settings\Temp	NT	
AUTHORITY\SYSTEM			
	%USERPROFILE%\Local Settings\Temp	NT	
AUTHORITY\SYSTEM			
TEMP	%USERPROFILE%\Local Settings\Temp	NT	
AUTHORITY\NETWORK SERVICE			
	%USERPROFILE%\Local Settings\Temp	NT	
AUTHORITY\NETWORK SERVICE			

```

TEMP %USERPROFILE%\Local Settings\Temp
VENOM\Administrator
TMP %USERPROFILE%\Local Settings\Temp
VENOM\Administrator

[Print Jobs]

Document Size Owner Notify Status
Time Submitted Start Time
Until Time Elapsed Time
Pages Printed Job ID Priority
Parameters Driver Print
Processor Host Print Queue Data Type Name

[Network Connections]

Local Name Remote Name Type
Status User Name
V:\\\inforb\mount Disk Persistent
Connection

[Running Tasks]

Name Path Process ID Priority Min
Working Set Max Working Set Start Time
Version Size File Date
system idle process Not Available 0 0
Not Available Not Available Not
Available Not Available Not Available Not
Available
system Not Available 4 8 0
1413120 Not Available Not Available
Not Available Not Available
smss.exe Not Available 380 11
204800 1413120 5/2/2003 6:35 PM Not
Available Not Available Not Available
csrss.exe Not Available 496 13 Not
Available Not Available 5/2/2003 6:38 PM Not
Available Not Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe
520 13 204800 1413120
5/2/2003 6:38 PM 5.2.3790.0
(srvo3_rtm.030324-2048) 536.50 KB (549,376
bytes) 3/25/2003 12:00 AM
services.exe c:\windows\system32\services.exe
564 9 204800 1413120
5/2/2003 6:38 PM 5.2.3790.0
(srvo3_rtm.030324-2048) 102.00 KB (104,448
bytes) 3/25/2003 12:00 AM
lsass.exe c:\windows\system32\lsass.exe 576 9
204800 1413120 5/2/2003 6:38 PM
5.2.3790.0 (srvo3_rtm.030324-2048)
13.00 KB (13,312 bytes) 3/25/2003
12:00 AM
svchost.exe c:\windows\system32\svchost.exe
740 8 204800 1413120
5/2/2003 6:38 PM 5.2.3790.0
(srvo3_rtm.030324-2048) 13.00 KB (13,312 bytes)
3/25/2003 12:00 AM
svchost.exe c:\windows\system32\svchost.exe
792 8 204800 1413120
5/2/2003 6:38 PM 5.2.3790.0

```

```

(srvo3_rtm.030324-2048) 13.00 KB (13,312 bytes)
3/25/2003 12:00 AM
svchost.exe c:\windows\system32\svchost.exe
908 8 204800 1413120
5/2/2003 6:38 PM 5.2.3790.0
(srvo3_rtm.030324-2048) 13.00 KB (13,312 bytes)
3/25/2003 12:00 AM
msdtc.exe Not Available 1000 8 Not
Available Not Available 5/2/2003 6:38 PM Not
Available Not Available Not Available
explorer.exe c:\windows\explorer.exe
1328 8 204800 1413120
5/2/2003 6:38 PM 6.00.3790.0
(srvo3_rtm.030324-2048) 1,008.50 KB (1,032,704
bytes) 3/25/2003 12:00 AM
wmiprvse.exe Not Available 1544 8
Not Available Not Available
5/2/2003 6:38 PM Not Available Not
Available Not Available
helpctr.exe
c:\windows\pchealth\helpctr\binaries\helpct
r.exe 1764 8 204800 1413120
5/2/2003 6:40 PM 5.2.3790.0
(srvo3_rtm.030324-2048) 764.00 KB (782,336
bytes) 5/1/2003 6:36 PM
wmiprvse.exe Not Available 1816 8
Not Available Not Available
5/2/2003 6:40 PM Not Available Not
Available Not Available
helpsvc.exe
c:\windows\pchealth\helpctr\binaries\helpsv
c.exe 1828 8 204800 1413120
5/2/2003 6:40 PM 5.2.3790.0
(srvo3_rtm.030324-2048) 720.00 KB (737,280
bytes) 5/1/2003 6:36 PM

[Loaded Modules]

Name Version Size File Date Manufacturer
Path
winlogon 5.2.3790.0 (srvo3_rtm.030324-2048)
536.50 KB (549,376 bytes) 3/25/2003
12:00 AM Microsoft Corporation
ntdll 5.2.3790.0 (srvo3_rtm.030324-2048)
722.50 KB (739,840 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\ntdll.dll
kernel32 5.2.3790.0 (srvo3_rtm.030324-2048)
965.00 KB (988,160 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\kernel32.dll
msvcrt 7.0.3790.0 (srvo3_rtm.030324-2048)
319.50 KB (327,168 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\msvcrt.dll
advapi32 5.2.3790.0 (srvo3_rtm.030324-2048)
559.50 KB (572,928 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\advapi32.dll
rpcrt4 5.2.3790.0 (srvo3_rtm.030324-2048)
643.50 KB (658,944 bytes) 3/25/2003

```

```

12:00 AM Microsoft Corporation
c:\windows\system32\rpcrt4.dll
user32 5.2.3790.0 (srvo3_rtm.030324-2048)
562.00 KB (575,488 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\user32.dll
gdi32 5.2.3790.0 (srvo3_rtm.030324-2048)
263.00 KB (269,312 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\gdi32.dll
userenv 5.2.3790.0 (srvo3_rtm.030324-2048)
732.50 KB (750,080 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\userenv.dll
nddeapi 5.2.3790.0 (srvo3_rtm.030324-2048)
16.00 KB (16,384 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\nddeapi.dll
crypt32 5.131.3790.0 (srvo3_rtm.030324-2048)
598.00 KB (612,352 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\crypt32.dll
msasn1 5.2.3790.0 (srvo3_rtm.030324-2048)
58.00 KB (59,392 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\msasn1.dll
secur32 5.2.3790.0 (srvo3_rtm.030324-2048)
63.00 KB (64,512 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\secur32.dll
winsta 5.2.3790.0 (srvo3_rtm.030324-2048)
51.00 KB (52,224 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\winsta.dll
netapi32 5.2.3790.0 (srvo3_rtm.030324-2048)
317.00 KB (324,608 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\netapi32.dll
profmap 5.2.3790.0 (srvo3_rtm.030324-2048)
22.00 KB (22,528 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\profmap.dll
regapi 5.2.3790.0 (srvo3_rtm.030324-2048)
48.50 KB (49,664 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\regapi.dll
ws2_32 5.2.3790.0 (srvo3_rtm.030324-2048)
87.50 KB (89,600 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\ws2_32.dll
ws2help 5.2.3790.0 (srvo3_rtm.030324-2048)
19.50 KB (19,968 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\ws2help.dll
psapi 5.2.3790.0 (srvo3_rtm.030324-2048)
21.50 KB (22,016 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\psapi.dll
version 5.2.3790.0 (srvo3_rtm.030324-2048)
17.00 KB (17,408 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\version.dll

```

setupapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	1,014.50 KB (1,038,848 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\setupapi.dll	
msgina	5.2.3790.0 (srv03_rtm.030324-2048)	
	1.14 MB (1,191,936 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\msgina.dll	
shsvcs	6.00.3790.0 (srv03_rtm.030324-2048)	
	121.50 KB (124,416 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\shsvcs.dll	
shlwapi	6.00.3790.0 (srv03_rtm.030324-2048)	
	281.00 KB (287,744 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\shlwapi.dll	
sfc	5.2.3790.0 (srv03_rtm.030324-2048)	
	4.50 KB (4,608 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\sfc.dll	
sfc_os	5.2.3790.0 (srv03_rtm.030324-2048)	
	133.00 KB (136,192 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\sfc_os.dll	
wintrust	5.131.3790.0 (srv03_rtm.030324-2048)	
	161.50 KB (165,376 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wintrust.dll	
ole32	5.2.3790.0 (srv03_rtm.030324-2048)	
	1.13 MB (1,187,328 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\ole32.dll	
imagehlp	5.2.3790.0 (srv03_rtm.030324-2048)	
	142.50 KB (145,920 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\imagehlp.dll	
comctl32	6.0 (srv03_rtm.030324-2048)	907.00 KB
	(928,768 bytes)	5/1/2003 11:59 AM Microsoft
Corporation		
	c:\windows\winsxs\x86_microsoft.windows.com	
mon-controls_6595b64144ccf1df_6.0.100.0_x-		
ww_8a69ba05\comctl32.dll		
winscard	5.2.3790.0 (srv03_rtm.030324-2048)	
	98.50 KB (100,864 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\winscard.dll	
wtsapi32	5.2.3790.0 (srv03_rtm.030324-2048)	
	17.50 KB (17,920 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wtsapi32.dll	
winmm	5.2.3790.0 (srv03_rtm.030324-2048)	
	166.00 KB (169,984 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\winmm.dll	
sxs	5.2.3790.0 (srv03_rtm.030324-2048)	
	733.00 KB (750,592 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\sxs.dll	
wldap32	5.2.3790.0 (srv03_rtm.030324-2048)	
	158.00 KB (161,792 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wldap32.dll	

rsaenh	5.2.3790.0 (srv03_rtm.030324-2048)	
	176.83 KB (181,072 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\rsaenh.dll	
shell32	6.00.3790.0 (srv03_rtm.030324-2048)	
	7.79 MB (8,166,400 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\shell32.dll	
cscdll	5.2.3790.0 (srv03_rtm.030324-2048)	
	99.00 KB (101,376 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\cscdll.dll	
wlnotify	5.2.3790.0 (srv03_rtm.030324-2048)	
	87.50 KB (89,600 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wlnotify.dll	
winspool	5.2.3790.0 (srv03_rtm.030324-2048)	
	140.00 KB (143,360 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\winspool.drv	
mpr	5.2.3790.0 (srv03_rtm.030324-2048)	
	56.00 KB (57,344 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\mpr.dll	
comct132	5.82 (srv03_rtm.030324-2048)	561.00 KB
	(574,464 bytes)	5/1/2003 11:59 AM Microsoft
Corporation		
	c:\windows\winsxs\x86_microsoft.windows.com	
mon-controls_6595b64144ccf1df_5.82.0.0_x-		
ww_8a69ba05\comct132.dll		
uxtheme	6.00.3790.0 (srv03_rtm.030324-2048)	
	196.00 KB (200,704 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\uxtheme.dll	
samlib	5.2.3790.0 (srv03_rtm.030324-2048)	
	49.00 KB (50,176 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\samlib.dll	
cscui	5.2.3790.0 (srv03_rtm.030324-2048)	
	305.00 KB (312,320 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\cscui.dll	
drprov	5.2.3790.0 (srv03_rtm.030324-2048)	
	12.50 KB (12,800 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\drprov.dll	
ntlanman	5.2.3790.0 (srv03_rtm.030324-2048)	
	41.00 KB (41,984 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\ntlanman.dll	
netui0	5.2.3790.0 (srv03_rtm.030324-2048)	
	75.50 KB (77,312 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\netui0.dll	
netuil	5.2.3790.0 (srv03_rtm.030324-2048)	
	184.00 KB (188,416 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\netuil.dll	
davclnt	5.2.3790.0 (srv03_rtm.030324-2048)	
	23.50 KB (24,064 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\davclnt.dll	

mpriui	5.2.3790.0 (srv03_rtm.030324-2048)	
	49.00 KB (50,176 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\mpriui.dll	
netui2	5.2.3790.0 (srv03_rtm.030324-2048)	
	309.50 KB (316,928 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\netui2.dll	
comdlg32	6.00.3790.0 (srv03_rtm.030324-2048)	
	261.00 KB (267,264 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\comdlg32.dll	
netmsg	5.2.3790.0 (srv03_rtm.030324-2048)	
	178.00 KB (182,272 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\netmsg.dll	
oleaut32	5.2.3790.0 (486.00 KB)	3/25/2003 12:00 AM Microsoft
bytes		
	c:\windows\system32\oleaut32.dll	
ntmarta	5.2.3790.0 (114.00 KB)	3/25/2003
	(116,736 bytes)	
12:00 AM	Microsoft Corporation	
	c:\windows\system32\ntmarta.dll	
clbcatq	2001.12.4720.0 (481.00 KB)	5/1/2003 6:32 PM
	(492,544 bytes)	
	c:\windows\system32\clbcatq.dll	
comres	2001.12.4720.1 (778.00 KB)	3/25/2003
	(796,672 bytes)	
12:00 AM	Microsoft Corporation	
	c:\windows\system32\comres.dll	
services	5.2.3790.0 (102.00 KB)	3/25/2003
	(104,448 bytes)	
12:00 AM	Microsoft Corporation	
	c:\windows\system32\services.exe	
scesrv	5.2.3790.0 (316.50 KB)	3/25/2003
	(324,096 bytes)	
12:00 AM	Microsoft Corporation	
	c:\windows\system32\scesrv.dll	
authz	5.2.3790.0 (67.00 KB)	3/25/2003
	(68,608 bytes)	
12:00 AM	Microsoft Corporation	
	c:\windows\system32\authz.dll	
umpnpmgr	5.2.3790.0 (121.50 KB)	3/25/2003
	(124,416 bytes)	
12:00 AM	Microsoft Corporation	
	c:\windows\system32\umpnpmgr.dll	
ncobjapi	5.2.3790.0 (34.50 KB)	3/25/2003
	(35,328 bytes)	
12:00 AM	Microsoft Corporation	
	c:\windows\system32\ncobjapi.dll	
msvcp60	6.05.2144.0 (388.00 KB)	3/25/2003 12:00 AM Microsoft
bytes		
	c:\windows\system32\msvcp60.dll	
eventlog	5.2.3790.0 (60.50 KB)	3/25/2003
	(61,952 bytes)	
12:00 AM	Microsoft Corporation	
	c:\windows\system32\eventlog.dll	
lsass	5.2.3790.0 (13.00 KB)	3/25/2003
	(13,312 bytes)	
12:00 AM	Microsoft Corporation	
	c:\windows\system32\lsass.exe	

lsasrv	5.2.3790.0 (srv03_rtm.030324-2048)	
	780.50 KB (799,232 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\lsasrv.dll	
samsrv	5.2.3790.0 (srv03_rtm.030324-2048)	
	452.00 KB (462,848 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\samsrv.dll	
cryptdll	5.2.3790.0 (srv03_rtm.030324-2048)	
	34.00 KB (34,816 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\cryptdll.dll	
dnsapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	147.50 KB (151,040 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\dnsapi.dll	
ntdsapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	76.00 KB (77,824 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\ntdsapi.dll	
msprivs	5.2.3790.0 (srv03_rtm.030324-2048)	
	46.50 KB (47,616 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\msprivs.dll	
kerberos	5.2.3790.0 (srv03_rtm.030324-2048)	
	332.50 KB (340,480 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\kerberos.dll	
msv1_0	5.2.3790.0 (srv03_rtm.030324-2048)	
	127.00 KB (130,048 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\msv1_0.dll	
netlogon	5.2.3790.0 (srv03_rtm.030324-2048)	
	409.00 KB (418,816 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\netlogon.dll	
w32time	5.2.3790.0 (srv03_rtm.030324-2048)	
	216.00 KB (221,184 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\w32time.dll	
iphlpapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	82.50 KB (84,480 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\iphlpapi.dll	
schannel	5.2.3790.0 (srv03_rtm.030324-2048)	
	149.50 KB (153,088 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\schannel.dll	
wdigest	5.2.3790.0 (srv03_rtm.030324-2048)	
	61.00 KB (62,464 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wdigest.dll	
rassfm	5.2.3790.0 (srv03_rtm.030324-2048)	
	20.50 KB (20,992 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\rassfm.dll	
kdcsvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	221.00 KB (226,304 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\kdcsvc.dll	
ntdsa	5.2.3790.0 (srv03_rtm.030324-2048)	
	1.45 MB (1,520,640 bytes)	3/25/2003

12:00 AM	Microsoft Corporation	
	c:\windows\system32\ntdsa.dll	
ntdsatq	5.2.3790.0 (srv03_rtm.030324-2048)	
	32.00 KB (32,768 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\ntdsatq.dll	
mswsock	5.2.3790.0 (srv03_rtm.030324-2048)	
	254.00 KB (260,096 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\mswsock.dll	
esent	5.2.3790.0 (srv03_rtm.030324-2048)	
	1.01 MB (1,056,256 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\esent.dll	
scecli	5.2.3790.0 (srv03_rtm.030324-2048)	
	179.50 KB (183,808 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\scecli.dll	
wshtcpip	5.2.3790.0 (srv03_rtm.030324-2048)	
	18.00 KB (18,432 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wshtcpip.dll	
dsenh	5.2.3790.0 (srv03_rtm.030324-2048)	
	131.33 KB (134,480 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\dsenh.dll	
svchost	5.2.3790.0 (srv03_rtm.030324-2048)	
	13.00 KB (13,312 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\svchost.exe	
rpcss	5.2.3790.0 (srv03_rtm.030324-2048)	
	276.50 KB (283,136 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\rpcss.dll	
termsrv	5.2.3790.0 (srv03_rtm.030324-2048)	
	216.50 KB (221,696 bytes)	5/1/2003 6:33
PM	Microsoft Corporation	
	c:\windows\system32\termsrv.dll	
icaapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	10.50 KB (10,752 bytes)	5/1/2003 6:33
PM	Microsoft Corporation	
	c:\windows\system32\icaapi.dll	
mstlsapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	104.50 KB (107,008 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\mstlsapi.dll	
activeds	5.2.3790.0 (srv03_rtm.030324-2048)	
	189.00 KB (193,536 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\activeds.dll	
adsldpc	5.2.3790.0 (srv03_rtm.030324-2048)	
	142.50 KB (145,920 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\adsldpc.dll	
credui	5.2.3790.0 (srv03_rtm.030324-2048)	
	159.00 KB (162,816 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\credui.dll	
atl	3.05.2283 83.00 KB (84,992 bytes)	3/25/2003 12:00 AM
	Microsoft Corporation	
	c:\windows\system32\atl.dll	
rdpwsx	5.2.3790.0 (srv03_rtm.030324-2048)	
	80.13 KB (82,056 bytes)	5/1/2003 6:33

PM	Microsoft Corporation	
	c:\windows\system32\rdpwsx.dll	
wkssvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	125.00 KB (128,000 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wkssvc.dll	
pchsvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	31.50 KB (32,256 bytes)	5/1/2003 6:36
PM	Microsoft Corporation	
	c:\windows\pchealth\helpctrl\binaries\pchsvc.dll	
srvsvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	89.00 KB (91,136 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\srvsvc.dll	
wmisvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	131.00 KB (134,144 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\wmisvc.dll	
vssapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	528.00 KB (540,672 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\vssapi.dll	
es	2001.12.4720.0 (srv03_rtm.030324-2048)	
	221.50 KB (226,816 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\es.dll	
browser	5.2.3790.0 (srv03_rtm.030324-2048)	
	70.50 KB (72,192 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\browser.dll	
netrap	5.2.3790.0 (srv03_rtm.030324-2048)	
	11.50 KB (11,776 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\netrap.dll	
comsvcs	2001.12.4720.0 (srv03_rtm.030324-2048)	
	1.14 MB (1,199,616 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\comsvcs.dll	
netman	5.2.3790.0 (srv03_rtm.030324-2048)	
	209.00 KB (214,016 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\netman.dll	
mpräpi	5.2.3790.0 (srv03_rtm.030324-2048)	
	81.00 KB (82,944 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\mpräpi.dll	
rtutils	5.2.3790.0 (srv03_rtm.030324-2048)	
	32.00 KB (32,768 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\rtutils.dll	
rasapi32	5.2.3790.0 (srv03_rtm.030324-2048)	
	227.50 KB (232,960 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\rasapi32.dll	
rasman	5.2.3790.0 (srv03_rtm.030324-2048)	
	56.50 KB (57,856 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\rasman.dll	
tapi32	5.2.3790.0 (srv03_rtm.030324-2048)	
	175.00 KB (179,200 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\tapi32.dll	

wzcsvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	272.50 KB (279,040 bytes)	3/25/2003
6:15 AM	Microsoft Corporation	
	c:\windows\system32\wzcsvc.dll	
wmi	5.2.3790.0 (srv03_rtm.030324-2048)	
	6.50 KB (6,656 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wmi.dll	
dhcpcsvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	101.50 KB (103,936 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\dhcpcsvc.dll	
wzcsapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	24.50 KB (25,088 bytes)	3/25/2003
6:15 AM	Microsoft Corporation	
	c:\windows\system32\wzcsapi.dll	
netshell	5.2.3790.0 (srv03_rtm.030324-2048)	
	1.67 MB (1,747,456 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\netshell.dll	
clusapi	5.2.3790.0 (srv03_rtm.030324-2048)	
	56.00 KB (57,344 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\clusapi.dll	
netcfgx	5.2.3790.0 (srv03_rtm.030324-2048)	
	726.00 KB (743,424 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\netcfgx.dll	
winipsec	5.2.3790.0 (srv03_rtm.030324-2048)	
	34.50 KB (35,328 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\winipsec.dll	
hnetcfg	5.2.3790.0 (srv03_rtm.030324-2048)	
	243.50 KB (249,344 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\hnetcfg.dll	
wininet	6.00.3790.0 (srv03_rtm.030324-2048)	
	609.00 KB (623,616 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wininet.dll	
wbemprox	5.2.3790.0 (srv03_rtm.030324-2048)	
	17.50 KB (17,920 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemprox.dll	
wbemcomm	5.2.3790.0 (srv03_rtm.030324-2048)	
	211.50 KB (216,576 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcomm.dll	
wbemcore	5.2.3790.0 (srv03_rtm.030324-2048)	
	457.00 KB (467,968 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcore.dll	
esscli	5.2.3790.0 (srv03_rtm.030324-2048)	
	235.50 KB (241,152 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\esscli.dll	
fastprox	5.2.3790.0 (srv03_rtm.030324-2048)	
	443.00 KB (453,632 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\fastprox.dll	
wbemsvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	42.50 KB (43,520 bytes)	5/1/2003 6:32

PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemsvc.dll	
wmiutils	5.2.3790.0 (srv03_rtm.030324-2048)	
	90.50 KB (92,672 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\wmiutils.dll	
repdrvfs	5.2.3790.0 (srv03_rtm.030324-2048)	
	165.00 KB (168,960 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\repdrvfs.dll	
wmiprvsd	5.2.3790.0 (srv03_rtm.030324-2048)	
	405.50 KB (415,232 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\wmiprvsd.dll	
wbemess	5.2.3790.0 (srv03_rtm.030324-2048)	
	256.50 KB (262,656 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemess.dll	
ncprov	5.2.3790.0 (srv03_rtm.030324-2048)	
	43.00 KB (44,032 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\ncprov.dll	
wbemcons	5.2.3790.0 (srv03_rtm.030324-2048)	
	69.00 KB (70,656 bytes)	5/1/2003 6:32
PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcons.dll	
rasdlg	5.2.3790.0 (srv03_rtm.030324-2048)	
	642.00 KB (657,408 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\rasdlg.dll	
explorer	6.00.3790.0 (srv03_rtm.030324-2048)	
	1,008.50 KB (1,032,704 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\explorer.exe	
browseui	6.00.3790.0 (srv03_rtm.030324-2048)	
	1.01 MB (1,057,280 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\browseui.dll	
shdocvw	6.00.3790.0 (srv03_rtm.030324-2048)	
	1.33 MB (1,393,664 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\shdocvw.dll	
apphelp	5.2.3790.0 (srv03_rtm.030324-2048)	
	122.00 KB (124,928 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\apphelp.dll	
themeui	6.00.3790.0 (srv03_rtm.030324-2048)	
	360.50 KB (369,152 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\themeui.dll	
msimg32	5.2.3790.0 (srv03_rtm.030324-2048)	
	4.50 KB (4,608 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\msimg32.dll	
linkinfo	5.2.3790.0 (srv03_rtm.030324-2048)	
	16.50 KB (16,896 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\linkinfo.dll	
ntshrui	6.00.3790.0 (srv03_rtm.030324-2048)	
	136.00 KB (139,264 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\ntshrui.dll	

urlmon	6.00.3790.0 (srv03_rtm.030324-2048)	
	501.50 KB (513,536 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\urlmon.dll	
webcheck	6.00.3790.0 (srv03_rtm.030324-2048)	
	261.50 KB (267,776 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\webcheck.dll	
wsock32	5.2.3790.0 (srv03_rtm.030324-2048)	
	22.00 KB (22,528 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\wsock32.dll	
stobject	5.2.3790.0 (srv03_rtm.030324-2048)	
	117.50 KB (120,320 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\stobject.dll	
batmeter	6.00.3790.0 (srv03_rtm.030324-2048)	
	28.50 KB (29,184 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\batmeter.dll	
powrprof	6.00.3790.0 (srv03_rtm.030324-2048)	
	14.50 KB (14,848 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\powrprof.dll	
printui	5.2.3790.0 (srv03_rtm.030324-2048)	
	536.50 KB (549,376 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\printui.dll	
cfgmgr32	5.2.3790.0 (srv03_rtm.030324-2048)	
	17.50 KB (17,920 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\cfgmgr32.dll	
helpctr	5.2.3790.0 (srv03_rtm.030324-2048)	
	764.00 KB (782,336 bytes)	5/1/2003 6:36
PM	Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\helpct	
r.exe		
hcappres	5.2.3790.0 (srv03_rtm.030324-2048)	
	6.50 KB (6,656 bytes)	5/1/2003 6:36
PM	Microsoft Corporation	
	c:\windows\pchealth\hcappres\hcappres	
es.dll		
itss	5.2.3790.0 (srv03_rtm.030324-2048)	
	119.50 KB (122,368 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\itss.dll	
msxml3	8.40.9419.0 1.28 MB (1,337,344 bytes)	3/25/2003 12:00 AM
bytes)		Microsoft Corporation
	c:\windows\system32\msxml3.dll	
pchshell	5.2.3790.0 (srv03_rtm.030324-2048)	
	100.50 KB (102,912 bytes)	5/1/2003 6:36
PM	Microsoft Corporation	
	c:\windows\pchealth\pchshe\pchshe	
11.dll		
mlang	6.00.3790.0 (srv03_rtm.030324-2048)	
	570.00 KB (583,680 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\mlang.dll	
mshtml	6.00.3790.0 (srv03_rtm.030324-2048)	
	2.78 MB (2,916,352 bytes)	3/25/2003
12:00 AM	Microsoft Corporation	
	c:\windows\system32\mshtml.dll	

```

msimtf      5.2.3790.0 (srv03_rtm.030324-2048)
149.00 KB (152,576 bytes)   3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\msimtf.dll
msctf       5.2.3790.0 (srv03_rtm.030324-2048)
287.00 KB (293,888 bytes)   3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\msctf.dll
shdoclc    6.00.3790.0 (srv03_rtm.030324-2048)
588.50 KB (602,624 bytes)   3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\shdoclc.dll
jscript     5.6.0.8515        436.00 KB (446,464
bytes) 3/25/2003 12:00 AM Microsoft Corporation
c:\windows\system32\jscript.dll
msls31     3.10.349.0        147.00 KB (150,528
bytes) 3/25/2003 12:00 AM Microsoft Corporation
c:\windows\system32\msls31.dll
imm32      5.2.3790.0 (srv03_rtm.030324-2048)
105.50 KB (108,032 bytes)  3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\imm32.dll
mshtimedl  6.00.3790.0 (srv03_rtm.030324-2048)
443.50 KB (454,144 bytes) 3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\mshtimedl.dll
vbscript   5.6.0.8515        404.00 KB (413,696
bytes) 3/25/2003 12:00 AM Microsoft Corporation
c:\windows\system32\vbscript.dll
mfc42     6.05.3014.0       960.00 KB (983,040
bytes) 3/25/2003 12:00 AM Microsoft Corporation
c:\windows\system32\mfc42.dll
msinfo      5.2.3790.0 (srv03_rtm.030324-2048)
358.50 KB (367,104 bytes) 5/1/2003 6:36
PM         Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\msinfo
.dll
mfc42u    6.05.3014.0       960.00 KB (983,040
bytes) 3/25/2003 12:00 AM Microsoft Corporation
c:\windows\system32\mfc42u.dll
riched32   5.2.3790.0 (srv03_rtm.030324-2048)
3.50 KB (3,584 bytes)     3/25/2003
12:00 AM Microsoft Corporation
c:\windows\system32\riched32.dll
riched20   5.31.23.1218      406.00 KB (415,744
bytes) 3/25/2003 12:00 AM Microsoft Corporation
c:\windows\system32\riched20.dll
helpsvc    5.2.3790.0 (srv03_rtm.030324-2048)
720.00 KB (737,280 bytes) 5/1/2003 6:36
PM         Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\helpsv
c.exe
[Services]
Display Name      Name      State      Start Mode
Service Type      Path      Error Control
Start Name        Tag ID
Alerter           Stopped   Auto      Share Process
c:\windows\system32\svchost.exe -k
localservice      Normal    NT
AUTHORITY\LocalService      0

```

```

Application Layer Gateway Service      ALG
Stopped   Manual   Own Process
c:\windows\system32\alg.exe   Normal   NT
AUTHORITY\LocalService      0
Application Management      AppMgmt  Stopped
Manual   Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
Windows Audio          AudioSrv  Stopped  Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped   Manual   Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
Computer Browser        Browser   Running  Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
Indexing Service        CiSvc    Stopped  Disabled
Share Process
c:\windows\system32\ciscvc.exe Normal
LocalSystem 0
ClipBook ClipSrv        Stopped  Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal   LocalSystem 0
COM+ System Application      COMSysApp Stopped
Manual   Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal   LocalSystem 0
Cryptographic Services      CryptSvc Stopped
Auto     Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
Distributed File System      Dfs     Stopped
Auto     Own Process
c:\windows\system32\dfssvc.exe
Normal   LocalSystem 0
DHCP Client             Dhcp    Stopped  Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice          Normal   NT
AUTHORITY\NetworkService  0
Logical Disk Manager      Administrative Service
dmadmin   Stopped   Manual   Share Process
c:\windows\system32\dmadmin.exe /com
Normal   LocalSystem 0
Logical Disk Manager      dmserver Stopped
Auto     Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
DNS Client              DnsCache Stopped  Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice          Normal   NT
AUTHORITY\NetworkService  0
Error Reporting Service    ERSvc   Stopped
Auto     Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore    LocalSystem 0

```

```

Event Log Eventlog      Running  Auto      Share Process
c:\windows\system32\services.exe
Normal   LocalSystem 0
COM+ Event System      EventSystem  Running
Manual   Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
Help and Support helpsvc  Running  Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
Human Interface Device Access HidServ  Stopped
Disabled  Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
HTTP SSL HTTPFilter     Stopped  Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IMAPI CD-Burning COM Service ImapiService
Stopped  Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem 0
Intersite Messaging IsmServ  Stopped  Disabled Own
Process
c:\windows\system32\ismserv.exe
Normal   LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped  Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver     Running  Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
Workstation lanmanworkstation  Running
Auto     Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
License Logging          LicenseService  Stopped
Disabled  Own Process
c:\windows\system32\llssrv.exe
Normal   NT AUTHORITY\NetworkService  0
TCP/IP NetBIOS Helper    LmHosts  Stopped
Auto     Share Process
c:\windows\system32\svchost.exe -k
localservice          Normal   NT
AUTHORITY\LocalService  0
Messenger Messenger     Stopped  Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal   LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvc
Stopped  Disabled Own Process
c:\windows\system32\mnmsrvc.exe
Normal   LocalSystem 0
Distributed Transaction Coordinator MSDTC
Running  Auto   Own Process
c:\windows\system32\msdtc.exe Normal   NT
AUTHORITY\NetworkService  0
Windows Installer        MSI Server Stopped  Manual
Share Process
c:\windows\system32\msiexec.exe /v
Normal   LocalSystem 0

```

MSSQLSERVER	MSSQLSERVER	Stopped
Manual	Own Process	
c:\progra-1\micros-1\mssql\binn\sqlservr.exe		
Normal	LocalSystem	0
MSSQLServerADHelper	MSSQLServerADHelper	Stopped
Manual	Own Process	c:\program
files\microsoft\sql\server\80\tools\binn\sqldchlp.exe		
Normal	LocalSystem	0
Network DDE	NetDDE	Stopped
Share Process		
c:\windows\system32\netdde.exe		
Normal	LocalSystem	0
Network DDE DSDM	NetDDEdsm	Stopped
Disabled	Share Process	
c:\windows\system32\netdde.exe		
Normal	LocalSystem	0
Net Logon	Netlogon	Stopped
Manual	Share Process	
c:\windows\system32\lsass.exe	Normal	
LocalSystem	0	
Network Connections	Netman	Running
Share Process		
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Network Location Awareness (NLA)	Nla	Stopped
Manual	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
File Replication	NtFrs	Stopped
Manual	Own Process	
c:\windows\system32\ntfrs.exe	Ignore	
LocalSystem	0	
NT LM Security Support Provider	NTLmssp	Stopped
Manual	Share Process	
c:\windows\system32\lsass.exe	Normal	
LocalSystem	0	
Removable Storage	NtmsSvc	Stopped
Manual	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Plug and Play	PlugPlay	Running
Auto	Share Process	
c:\windows\system32\services.exe		
Normal	LocalSystem	0
IPSEC Services	PolicyAgent	Stopped
Auto	Share Process	
c:\windows\system32\lsass.exe	Normal	
LocalSystem	0	
Protected Storage	ProtectedStorage	Stopped
Auto	Share Process	
c:\windows\system32\lsass.exe	Normal	
LocalSystem	0	
Remote Access Auto Connection Manager	RasAuto	Stopped
Manual	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Remote Access Connection Manager	RasMan	Stopped
Manual	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Remote Desktop Help Session Manager	RDSessMgr	Stopped
Manual	Own Process	
c:\windows\system32\sessmgr.exe		
Normal	LocalSystem	0

Routing and Remote Access	RemoteAccess	
Stopped	Disabled	Share Process
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Remote Registry	RemoteRegistry	Stopped
Auto	Share Process	
c:\windows\system32\svchost.exe -k regsvc		
Normal	NT AUTHORITY\LocalService	0
Remote Procedure Call (RPC) Locator	RpcLocator	
Stopped	Manual	Own Process
c:\windows\system32\locator.exe		
Normal	NT AUTHORITY\NetworkService	0
Remote Procedure Call (RPC) RpcSs	Running	
Auto	Share Process	
c:\windows\system32\svchost -k rpcss		
Normal	LocalSystem	0
Resultant Set of Policy Provider	RSopProv	
Stopped	Manual	Share Process
c:\windows\system32\rspoprov.exe		
Normal	LocalSystem	0
Special Administration Console Helper	sacsvr	
Stopped	Manual	Share Process
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Security Accounts Manager	SamSs	Running
Auto	Share Process	
c:\windows\system32\lsass.exe	Normal	
LocalSystem	0	
Smart Card	SCardSrv	Stopped
Manual	Share Process	
c:\windows\system32\scardsrv.exe		
Ignore	NT AUTHORITY\LocalService	0
Task Scheduler	Schedule	Stopped
Auto	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Secondary Logon	seclogon	Stopped
Auto	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Ignore	LocalSystem	0
System Event Notification	SENS	Stopped
Auto	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Internet Connection Firewall (ICF) / Internet Connection Sharing (ICS)	SharedAccess	
Stopped	Disabled	Share Process
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Shell Hardware Detection	ShellHWDetection	
Stopped	Auto	Share Process
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Print Spooler	Spooler	Stopped
Auto	Share Process	
c:\windows\system32\spoolsv.exe		
Normal	LocalSystem	0
SQLSERVERAGENT	SQLSERVERAGENT	Stopped
Manual	Own Process	
c:\progra-1\micros-1\mssql\binn\sqlagent.exe		
Normal	LocalSystem	0

Windows Image Acquisition (WIA)	stisvc	
Stopped	Disabled	Share Process
c:\windows\system32\svchost.exe -k imgsvc		
Normal	NT AUTHORITY\LocalService	0
Microsoft Software Shadow Copy Provider	swprv	
Stopped	Manual	Own Process
c:\windows\system32\svchost.exe -k swprv		
Normal	LocalSystem	0
Performance Logs and Alerts	SysmonLog	Stopped
Manual	Own Process	
c:\windows\system32\smlogsvc.exe		
Normal	NT Authority\NetworkService	0
Telephony	Tapisrv	Stopped
Manual	Share Process	
c:\windows\system32\svchost.exe -k tapisrv		
Normal	LocalSystem	0
Terminal Services	TermService	Running
Manual	Share Process	
c:\windows\system32\svchost.exe -k termsvcs		
Normal	LocalSystem	0
Themes	Themes	Stopped
Disabled	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Telnet	Tlntsvr	Stopped
Disabled	Own Process	
c:\windows\system32\tlntsvr.exe		
Normal	NT AUTHORITY\LocalService	0
Distributed Link Tracking Server	TrkSvr	
Stopped	Disabled	Share Process
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Distributed Link Tracking Client	TrkWks	
Stopped	Auto	Share Process
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Terminal Services Session Directory	Tssdis	
Stopped	Disabled	Own Process
c:\windows\system32\tssdis.exe		
Normal	LocalSystem	0
Upload Manager	uploadmgr	Stopped
Manual	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
Uninterruptible Power Supply UPS	UPS	Stopped
Manual	Own Process	
c:\windows\system32\ups.exe		
Normal	NT AUTHORITY\LocalService	0
Virtual Disk Service	vds	Stopped
Manual	Own Process	
c:\windows\system32\vds.exe		
Normal	LocalSystem	0
Volume Shadow Copy VSS	VSS	Stopped
Manual	Share Process	
c:\windows\system32\vssvc.exe		
Normal	LocalSystem	0
Windows Time	W32Time	Stopped
Auto	Share Process	
c:\windows\system32\svchost.exe -k netsvcs		
Normal	LocalSystem	0
WebClient	WebClient	Stopped
Disabled	Share Process	
c:\windows\system32\svchost.exe -k		
localservice	Normal	NT AUTHORITY\LocalService

```

WinHTTP Web Proxy Auto-Discovery Service
  WinHttpAutoProxySvc Stopped  Manual
  Share Process
  c:\windows\system32\svchost.exe -k
localservice  Normal  NT
AUTHORITY\LocalService  0
Windows Management Instrumentation  winmgmt
  Running  Auto  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
Ignore  LocalSystem  0
Portable Media Serial Number Service  WmdmPmSN
  Stopped  Manual  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem  0
Windows Management Instrumentation Driver Extensions
  Wmi  Stopped  Manual  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem  0
WMI Performance Adapter  WmiApSrv  Stopped
  Manual  Own Process
  c:\windows\system32\wbem\wmiapsrv.exe
Normal  LocalSystem  0
Automatic Updates  wuauserv  Stopped  Auto
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem  0
Wireless Configuration  WZCSVc  Stopped
  Auto  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem  0

[Program Groups]

Group Name      Name      User Name
Accessories      Default User:Accessories
  Default User
Accessories\Accessibility  Default
User:Accessories\Accessibility  Default User
Accessories\Entertainment  Default
User:Accessories\Entertainment  Default User
Startup  Default User:Startup  Default User
Accessories      All Users:Accessories  All
Users
Accessories\Accessibility  All
Users:Accessories\Accessibility  All Users
Accessories\Communications  All
Users:Accessories\Communications  All Users
Accessories\Entertainment  All
Users:Accessories\Entertainment  All Users
Accessories\System Tools  All
Users:Accessories\System Tools  All Users
Administrative Tools  All
Users:Administrative Tools  All Users
Microsoft SQL Server  All Users:Microsoft SQL
Server  All Users
Startup  All Users:Startup  All Users
Tardis  All Users:Tardis  All Users
Accessories  NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM

```

```

Accessories\Accessibility  NT
AUTHORITY\SYSTEM:Accessories\Accessibility  NT
Accessories\Entertainment  NT
AUTHORITY\SYSTEM:Accessories\Entertainment  NT
Startup  NT AUTHORITY\SYSTEM:Startup  NT
AUTHORITY\SYSTEM
Accessories  VENOM\Administrator:Accessories
  VENOM\Administrator
Accessories\Accessibility
  VENOM\Administrator:Accessories\Accessibility
  VENOM\Administrator
Accessories\Entertainment
  VENOM\Administrator:Accessories\Entertainment
  VENOM\Administrator
Administrative Tools
  VENOM\Administrator:Administrative Tools
  VENOM\Administrator
Startup  VENOM\Administrator:Startup
  VENOM\Administrator

[Startup Programs]

Program  Command  User Name Location
desktop  desktop.ini  NT AUTHORITY\SYSTEM
Startup
desktop  desktop.ini  VENOM\Administrator
Startup
Tardis  tardis.lnk  VENOM\Administrator
Startup
desktop  desktop.ini  .DEFAULT Startup
desktop  desktop.ini  All Users Common
Startup

[OLE Registration]

Object  Local Server
Sound (OLE2)  sndrec32.exe
Media Clip  mplay32.exe
Video Clip  mplay32.exe /avi
MIDI Sequence  mplay32.exe /mid
Sound  Not Available
Media Clip  Not Available
WordPad Document  "%programfiles%\windows
nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object  Not
Available
Bitmap Image  mspaint.exe

[Windows Error Reporting]

Time  Type  Details
[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category
]
[Summary]

```

Item	Value			
Version	6.0.3790.0			
Build	63790			
Application Path	C:\Program Files\Internet Explorer			
Language	English (United States)			
Active Printer	Not Available			
Cipher Strength	128-bit			
Content Advisor	Disabled			
IEAK Install	No			
[File Versions]				
File	Version	Size	Date	Path
actxprxy.dll	6.0.3790.0	95 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
advpack.dll	6.0.3790.0	94 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx	6.0.3790.0	90 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browselc.dll	6.0.3790.0	62 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browseui.dll	6.0.3790.0	1,033 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll	6.0.3790.0	144 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll	5.82.3790.0	561 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxttrans.dll	6.3.3790.0	198 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll	6.3.3790.0	344 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3790.0	300 KB	3/25/2003 1:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation

ipeers.dll	6.0.3790.0	230 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
iesetup.dll	6.0.3790.0	59 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
ieuinit.inf	Not Available	20 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Not Available
iexplore.exe	6.0.3790.0	90 KB
	3/25/2003 1:00:00 AM	C:\Program
	Files\Internet Explorer	Microsoft Corporation
imgutil.dll	5.2.3790.0	35 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
inetcpl.cpl	6.0.3790.0	303 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
inetcplc.dll	6.0.3790.0	109 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
inseng.dll	6.0.3790.0	72 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
mlang.dll	6.0.3790.0	570 KB
	3/25/2003 1:00:00 AM	3/25/2003
Corporation		C:\WINDOWS\system32 Microsoft
msencode.dll	2002.10.4.0	112 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Not Available
mshta.exe	6.0.3790.0	26 KB
	3/25/2003 1:00:00 AM	3/25/2003
Corporation		C:\WINDOWS\system32 Microsoft
mshtml.dll	6.0.3790.0	2,848 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
mshtml.tlb	6.0.3790.0	1,319 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
mshtimed.dll	6.0.3790.0	444 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
mshtmler.dll	6.0.3790.0	55 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
msident.dll	6.0.3790.0	47 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
msidntld.dll	6.0.3790.0	15 KB
	3/25/2003 1:00:00 AM	

msieftp.dll	6.0.3790.0	230 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
msrating.dll	6.0.3790.0	132 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
mstime.dll	6.0.3790.0	491 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
occache.dll	6.0.3790.0	89 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
procexe.ocx	6.3.3790.0	78 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Intel Corporation
sendmail.dll	6.0.3790.0	52 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
shdoclc.dll	6.0.3790.0	589 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
shdocvw.dll	6.0.3790.0	1,361 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
shfolder.dll	6.0.3790.0	23 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
shlwapi.dll	6.0.3790.0	281 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
tdc.ocx	1.3.0.3130	58 KB
	3/25/2003 1:00:00 AM	3/25/2003
Corporation		C:\WINDOWS\system32 Microsoft
url.dll	6.0.3790.0	36 KB
	3/25/2003 1:00:00 AM	3/25/2003
Corporation		C:\WINDOWS\system32 Microsoft
urlmon.dll	6.0.3790.0	502 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
webcheck.dll	6.0.3790.0	262 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
wininet.dll	6.0.3790.0	609 KB
	3/25/2003 1:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation

Connection Preference	Never dial	
LAN Settings		
AutoConfigProxy	Not Available	
AutoProxyDetectMode	Disabled	
AutoConfigURL		
Proxy	Disabled	
ProxyServer		
ProxyOverride		
[Cache]		
[Following are sub-categories of this main category]		
[Summary]		
Item	Value	
Page Refresh Type	Automatic	
Temporary Internet Files Folder	C:\Documents and Settings\NetworkService\Local Settings\Temporary Internet Files	
Total Disk Space	Not Available	
Available Disk Space	Not Available	
Maximum Cache Size	Not Available	
Available Cache Size	Not Available	
[List of Objects]		
Program File	Status	CodeBase
No cached object information available		
[Content]		
[Following are sub-categories of this main category]		
[Summary]		
Item	Value	
Content Advisor	Disabled	
[Personal Certificates]		
Issued To	Issued By	Validity Signature Algorithm
No personal certificate information available		
[Other People Certificates]		
Issued To	Issued By	Validity Signature Algorithm
No other people certificate information available		
[Publishers]		
Name		
No publisher information available		
[Security]		
Zone	Security Level	
My Computer	Custom	

Local intranet	Medium-low
Trusted sites	Medium
Internet	High
Restricted sites	High

Client Summary

System Information report written at: 05/02/2003
04:23:21 PM
[System Information]

[Following are sub-categories of this main category]

[System Summary]

Item Value
OS Name Microsoft Windows 2000 Server
Version 5.0.2195 Service Pack 2 Build 2195
OS Manufacturer Microsoft Corporation
System Name CL73
System Manufacturer HP
System Model ProLiant DL360 G3
System Type X86-based PC
Processor x86 Family 15 Model 2 Stepping 7
GenuineIntel ~37426 Mhz
Processor x86 Family 15 Model 2 Stepping 7
GenuineIntel ~37426 Mhz
Processor x86 Family 15 Model 2 Stepping 7
GenuineIntel ~37426 Mhz
Processor x86 Family 15 Model 2 Stepping 7
GenuineIntel ~37426 Mhz
BIOS Version 02/04/03
Windows Directory C:\WINNT
System Directory C:\WINNT\System32
Boot Device \Device\Harddisk0\Partition1
Locale United States
User Name CL73\Administrator
Time Zone Central Daylight Time
Total Physical Memory 1,048,084 KB
Available Physical Memory 777,532 KB
Total Virtual Memory 2,783,516 KB
Available Virtual Memory 2,337,816 KB
Page File Space 1,735,432 KB
Page File C:\pagefile.sys

[Hardware Resources]

[Following are sub-categories of this main category]

[Conflicts/Sharing]

Resource Device
No conflicted/shared resources

[DMA]

Channel Device Status

7	Direct memory access controller	OK	0x00C0-0x00DF	Direct memory access controller
2	Standard floppy disk controller	OK	0x040B-0x040B	Direct memory access controller
	[Forced Hardware]		0x04D6-0x04D6	Direct memory access controller
	Device PNP Device ID		OK	OK
	No Forced Hardware		0x0061-0x0061	System speaker OK
	[I/O]		0x0060-0x0060	Standard 101/102-Key or Microsoft
	Address Range	Device Status	Natural PS/2 Keyboard	OK
	0x0000-0x0CCF	PCI bus OK	0x0064-0x0064	Standard 101/102-Key or Microsoft
	0x0000-0x0CCF	PCI bus OK	Natural PS/2 Keyboard	OK
	0x0000-0x0CCF	Direct memory access controller	0x0061-0x0061	System speaker OK
	OK		0x0060-0x0060	Standard 101/102-Key or Microsoft
	0x03B0-0x03BB	PCI bus OK	Natural PS/2 Keyboard	OK
	0x03B0-0x03BB	ATI Technologies Inc. RAGE XL PCI	0x0064-0x0064	Standard 101/102-Key or Microsoft
	OK		0x03F8-0x03FF	Communications Port (COM1) OK
	0x03C0-0x03DF	PCI bus OK	0x03F2-0x03F5	Standard floppy disk controller
	0x03C0-0x03DF	ATI Technologies Inc. RAGE XL PCI	OK	OK
	OK		0x03F7-0x03F7	Standard floppy disk controller
	0x2400-0x24FF	ATI Technologies Inc. RAGE XL PCI	OK	OK
	OK		0x2000-0x200F	Standard Dual Channel PCI IDE
	0x2800-0x28FF	Smart Array 5i OK	Controller	OK
	0x1800-0x18FF	HP ProLiant iLO Advanced System	0x01F0-0x01F7	Primary IDE Channel OK
	Management Controller	OK	0x03F6-0x03F6	Primary IDE Channel OK
	0x2C00-0x2FFF	HP iLO Management Interface	0x0170-0x0177	Secondary IDE Channel OK
	Driver	OK	0x0376-0x0376	Secondary IDE Channel OK
	0xA79-0x0A79	ISAPNP Read Data Port	[IRQs]	
	0x0279-0x0279	ISAPNP Read Data Port	IRQ Number Device	
	0x02F4-0x02F7	ISAPNP Read Data Port	9 Microsoft ACPI-Compliant System	
	0xF5F0-0x0F58	Motherboard resources	31 Smart Array 5i	
	0x0408-0x040F	Motherboard resources	23 HP ProLiant iLO Advanced System Management	
	0x0092-0x0092	Motherboard resources	Controller	
	0x0900-0x0903	Motherboard resources	22 HP iLO Management Interface Driver	
	0x0910-0x0911	Motherboard resources	1 Standard 101/102-Key or Microsoft Natural	
	0x0920-0x0923	Motherboard resources	PS/2 Keyboard	
	0x0930-0x0937	Motherboard resources	12 PS/2 Compatible Mouse	
	0x0940-0x0947	Motherboard resources	4 Communications Port (COM1)	
	0x0950-0x0957	Motherboard resources	6 Standard floppy disk controller	
	0x0C06-0x0C08	Motherboard resources	14 Primary IDE Channel	
	0x0C14-0x0C14	Motherboard resources	7 Standard OpenHCD USB Host Controller	
	0x0C49-0x0C4A	Motherboard resources	30 Compaq NC7781 Gigabit Server Adapter #2	
	0x0C50-0x0C52	Motherboard resources	29 Compaq NC7781 Gigabit Server Adapter	
	0x0C6C-0x0C6F	Motherboard resources	[Memory]	
	0x0010-0x001F	Motherboard resources	Range Device Status	
	0x0230-0x0233	Motherboard resources	0xA0000-0xBFFF PCI bus OK	
	0x0260-0x0267	Motherboard resources	0xA0000-0xBFFF ATI Technologies Inc. RAGE XL PCI	
	0x04D0-0x04D1	Motherboard resources	OK	
	0x0700-0x070F	Motherboard resources	0xF5D00000-0xF6FFFFFF PCI bus OK	
	0x0800-0x081F	Motherboard resources	0xF6000000-0xF6FFFFFF ATI Technologies Inc.	
	0x0C80-0x0C83	Motherboard resources	RAGE XL PCI OK	
	0x0CD4-0x0CD7	Motherboard resources	0xF5FF0000-0xF5FF0FFF ATI Technologies Inc.	
	0x0CF9-0x0CF9	Motherboard resources	RAGE XL PCI OK	
	0x0020-0x0021	Programmable interrupt controller	0xF5F80000-0xF5FBFFFF Smart Array 5i OK	
	OK		0xF5DF0000-0xF5DF3FFF Smart Array 5i OK	
	0x0A0-0x0A1	Programmable interrupt controller	0xF5F70000-0xF5F701FF HP ProLiant iLO	
	OK		Advanced System Management Controller OK	
	0x0C00-0x0C01	Programmable interrupt controller	0xF5F60000-0xF5F607FF HP iLO Management	
	OK		Interface Driver OK	
	0x0040-0x0043	System timer OK		
	0x0080-0x008F	Direct memory access controller		
	OK			

```

0xF5F50000-0x F5F51FFF HP iLO Management
Interface Driver OK
0xF5E80000-0x F5EFFFFF HP iLO Management
Interface Driver OK
0xF5E70000-0x F5E70FFF Standard OpenHCD USB
Host Controller OK
0xF7E00000-0x F7EFFFFF PCI bus OK
0xF7EF0000-0x F7EFFFFF Compaq NC7781 Gigabit
Server Adapter #2 OK
0xF7F00000-0x F7FFFFFF PCI bus OK
0xF7F0000-0x F7FFFFFF Compaq NC7781 Gigabit
Server Adapter OK

[Components]

[ Following are sub-categories of this main category
]

[Multimedia]

[ Following are sub-categories of this main category
]

[Audio Codecs]

Codec Manufacturer Description
Status File Version Size
Creation Date
c:\winnt\system32\iac25_32.ax Intel Corporation
Indeo® audio software OK
C:\WINNT\System32\IAC25_32.AX 2.05.53
195.00 KB (199,680 bytes) 12/7/1999
7:00:00 AM
c:\winnt\system32\tssoft32.acm DSP GROUP,
INC. OK
C:\WINNT\System32\TSSOFT32.ACML
1.01 9.27 KB (9,488 bytes)
12/7/1999 7:00:00 AM
c:\winnt\system32\msadp32.acm Microsoft Corporation
OK
C:\WINNT\System32\MSADP32.ACML 5.00.2134.1
14.77 KB (15,120 bytes) 12/7/1999
7:00:00 AM
c:\winnt\system32\msgsm32.acm Microsoft Corporation
OK
C:\WINNT\System32\MSGSM32.ACML 5.00.2134.1
22.27 KB (22,800 bytes) 12/7/1999
7:00:00 AM
c:\winnt\system32\lhacm.acm Microsoft Corporation
OK
C:\WINNT\System32\LHACM.ACML 4.4.3385
33.27 KB (34,064 bytes) 9/13/2002
5:46:04 PM
c:\winnt\system32\msg711.acm Microsoft Corporation
OK
C:\WINNT\System32\MSG711.ACML 5.00.2134.1
10.27 KB (10,512 bytes) 12/7/1999
7:00:00 AM
c:\winnt\system32\msg723.acm Microsoft Corporation
OK
C:\WINNT\System32\MSG723.ACML 4.4.3385
106.77 KB (109,328 bytes) 9/13/2002
5:46:03 PM

```

```

c:\winnt\system32\imaadp32.acm Microsoft
Corporation OK
C:\WINNT\System32\IMAADP32.ACML
5.00.2134.1 16.27 KB (16,656 bytes)
12/7/1999 7:00:00 AM

[Video Codecs]

Codec Manufacturer Description
Status File Version Size
Creation Date
c:\winnt\system32\ir50_32.dll Intel Corporation
Indeo® video 5.10 OK
C:\WINNT\System32\IR50_32.DLL
R.5.10.15.2.55 737.50 KB (755,200
bytes) 12/7/1999 7:00:00 AM
c:\winnt\system32\msh261.drv Microsoft Corporation
OK
C:\WINNT\System32\MSH261.DRV 4.4.3385
163.77 KB (167,696 bytes) 9/13/2002
5:46:04 PM
c:\winnt\system32\msh263.drv Microsoft Corporation
OK
C:\WINNT\System32\MSH263.DRV 4.4.3385
252.27 KB (258,320 bytes) 9/13/2002
5:45:39 PM
c:\winnt\system32\ir32_32.dll Intel(R) Corporation
OK
C:\WINNT\System32\IR32_32.DLL Not Available
194.50 KB (199,168 bytes) 12/7/1999
7:00:00 AM
c:\winnt\system32\iccvid.dll Radius Inc.
OK C:\WINNT\System32\ICCVID.DLL
1.10.0.6 108.00 KB (110,592 bytes)
12/7/1999 7:00:00 AM
c:\winnt\system32\msvidc32.dll Microsoft
Corporation OK
C:\WINNT\System32\MSVIDC32.DLL
5.00.2134.1 27.27 KB (27,920 bytes)
12/7/1999 7:00:00 AM
c:\winnt\system32\msrle32.dll Microsoft Corporation
OK
C:\WINNT\System32\MSRLE32.DLL 5.00.2134.1
10.77 KB (11,024 bytes) 12/7/1999
7:00:00 AM

[CD-ROM]

Item Value
Drive D:
Description CD-ROM Drive
Media Loaded False
Media Type CD-ROM
Name COMPAQ CRN-8245B
Manufacturer (Standard CD-ROM drives)
Status OK
Transfer Rate Not Available
SCSI Target ID 0
PNP Device ID IDE\CDROMCOMPAQ_CRN-
8245B_____2.19____\$&FB0C83D&0&0.0
.0

```

```

[Sound Device]

Item Value
No sound devices

[Display]

Item Value
Name ATI Technologies Inc. RAGE XL PCI
PNP Device ID PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2
7\3&267A616A&0&18
Adapter Type ATI RAGE XL PCI, ATI Technologies
Inc. compatible
Adapter Description ATI Technologies Inc. RAGE XL PCI
Adapter RAM 8.00 MB (8,388,608 bytes)
Installed Drivers atidrab.dll
Driver Version 5.00.2179.1
INF File display.inf (atirage3 section)
Color Planes 1
Color Table Entries 65536
Resolution 640 x 480 x 60 hertz
Bits/Pixel 16

[Infrared]

Item Value
No infrared devices

[Input]

[ Following are sub-categories of this main category
]

[Keyboard]

Item Value
Description Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard
Name Enhanced (101- or 102-key)
Layout 00000409
PNP Device ID ACPI\PNP0303\4&35118DFF&0
NumberOfFunctionKeys 12

[Pointing Device]

Item Value
Hardware Type PS/2 Compatible Mouse
Number of Buttons 2
Status OK
PNP Device ID ACPI\PNP0F13\4&35118DFF&0
Power Management Supported False
Double Click Threshold 6
Handedness Right Handed Operation

[Modem]

Item Value
No modems

```

[Network]
 [Following are sub-categories of this main category]

[Adapter]

Item	Value
Name	[00000000] RAS Async Adapter
Adapter Type	Not Available
Product Name	RAS Async Adapter
Installed True	
PNP Device ID	Not Available
Last Reset	5/2/2003 6:25:21 AM
Index	0
Service Name	AsyncMac
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Service Name	Not Available
Name	[00000001] WAN Miniport (L2TP)
Adapter Type	Not Available
Product Name	WAN Miniport (L2TP)
Installed True	
PNP Device ID	ROOT\MS_L2TPMINIPORT\0000
Last Reset	5/2/2003 6:25:21 AM
Index	1
Service Name	Rasl2tp
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Service Name	Rasl2tp
Driver	c:\winnt\system32\drivers\rasl2tp.sys (50800, 5.00.2179.1)
Name	[00000002] WAN Miniport (PPTP)
Adapter Type	Wide Area Network (WAN)
Product Name	WAN Miniport (PPTP)
Installed True	
PNP Device ID	ROOT\MS_PPTPMINIPORT\0000
Last Reset	5/2/2003 6:25:21 AM
Index	2
Service Name	PptpMiniport
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	50:50:54:50:30:30
Service Name	PptpMiniport

Driver c:\winnt\system32\drivers\raspppt.sys
(47856, 5.00.2160.1)

Name	[00000003] Direct Parallel
Adapter Type	Not Available
Product Name	Direct Parallel
Installed True	
PNP Device ID	ROOT\MS_PTIMINIPORT\0000
Last Reset	5/2/2003 6:25:21 AM
Index	3
Service Name	Raspti
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Service Name	Raspti
Driver	c:\winnt\system32\drivers\raspti.sys (16880, 5.00.2146.1)

Name	[00000004] WAN Miniport (IP)
Adapter Type	Not Available
Product Name	WAN Miniport (IP)
Installed True	
PNP Device ID	ROOT\MS_NDISWANIP\0000
Last Reset	5/2/2003 6:25:21 AM
Index	4
Service Name	NdisWan
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Service Name	NdisWan
Driver	c:\winnt\system32\drivers\ndiswan.sys (90096, 5.00.2195.2779)

Name	[00000005] Compaq NC7780 Gigabit Server
Adapter	
Adapter Type	Not Available
Product Name	Compaq NC7780 Gigabit Server
Adapter	
Installed True	
PNP Device ID	Not Available
Last Reset	5/2/2003 6:25:21 AM
Index	5
Service Name	q57w2k
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Service Name	Not Available

Name	[00000006] Compaq NC7780 Gigabit Server
Adapter	
Adapter Type	Not Available
Product Name	Compaq NC7780 Gigabit Server
Adapter	
Installed True	
PNP Device ID	Not Available
Last Reset	5/2/2003 6:25:21 AM
Index	6
Service Name	q57w2k
IP Address	130.172.11.73
IP Subnet	255.255.0.0
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:0B:CD:37:00:FD
Service Name	Not Available

Name	[00000007] Compaq NC3123 Fast Ethernet NIC
Adapter	
Adapter Type	Not Available
Product Name	Compaq NC3123 Fast Ethernet NIC
Adapter	
Installed True	
PNP Device ID	Not Available
Last Reset	5/2/2003 6:25:21 AM
Index	7
Service Name	N100
IP Address	130.172.11.73
IP Subnet	255.255.0.0
Default IP Gateway	Not Available
DHCP Enabled	True
DHCP Server	130.168.253.2
DHCP Lease Expires	9/16/2002 3:58:55 PM
DHCP Lease Obtained	9/15/2002 3:58:55 PM
MAC Address	00:0B:CD:37:00:FD
Service Name	Not Available

Name	[00000008] Compaq NC7781 Gigabit Server
Adapter	
Adapter Type	Ethernet 802.3
Product Name	Compaq NC7781 Gigabit Server
Adapter	
Installed True	
PNP Device ID	PCI\VEN_14E4&DEV_16A7&SUBSYS_00CB0E11&REV_0 2\3&1070020&0&10
Last Reset	5/2/2003 6:25:21 AM
Index	8
Service Name	q57w2k
IP Address	130.172.11.73
IP Subnet	255.255.0.0
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:0B:CD:37:00:FD
Service Name	q57w2k
IRQ Number	29
Driver	c:\winnt\system32\drivers\q57w2k.sys (79336, 2.90.0.0)

Name [00000009] Compaq NC7781 Gigabit Server
 Adapter Adapter Type Ethernet 802.3
 Product Name Compaq NC7781 Gigabit Server
 Adapter
 Installed True
 PNP Device ID PCI\VEN_14E4&DEV_16A7&SUBSYS_00CB0E11&REV_0
 2\3&13C0B0C5&0&10
 Last Reset 5/2/2003 6:25:21 AM
 Index 9
 Service Name q57w2k
 IP Address 130.168.40.73
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:0B:CD:37:00:C0
 Service Name q57w2k
 IRQ Number 30
 Driver c:\winnt\system32\drivers\q57w2k.sys
 (79336, 2.90.0.0)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	16 bytes
MaximumMessageSize	0 bytes
MessageOriented	False
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	True
SupportsGracefulClosing	True
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFD Tcpip [UDP/IP]
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	16 bytes
MaximumMessageSize	65467 bytes
MessageOriented	True
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False

SupportsMulticasting	True
Name	RSVP UDP Service Provider
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	16 bytes
MaximumMessageSize	65467 bytes
MessageOriented	True
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	True
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	True
Name	RSVP TCP Service Provider
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	16 bytes
MaximumMessageSize	0 bytes
MessageOriented	False
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	True
SupportsExpeditedData	True
SupportsGracefulClosing	True
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{125841CA-8599-48AB-89A9-92FAE43C70C}] SEQPACKET 5	
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{125841CA-8599-48AB-89A9-92FAE43C70C}] DATAGRAM 5	
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{60E37ACA-8A9E-4B00-840D-B290A4CCF817}] SEQPACKET 6	
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{60E37ACA-8A9E-4B00-840D-B290A4CCF817}] DATAGRAM 6	
ConnectionlessService	True
GuaranteesDelivery	False
Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{4249431A-469E-4735-A292-01AA526741FC}] SEQPACKET 4	
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes

```

MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{4249431A-469E-4735-A292-01AA526741FC}] DATAGRAM 4
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{3B09DDB7-7EB8-4941-8121-52DC6359F5A6}] SEQPACKET 3
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{3B09DDB7-7EB8-4941-8121-52DC6359F5A6}] DATAGRAM 3
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False

```

```

SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{684FA660-D082-4A8C-AC8C-C9D449B21686}] SEQPACKET 0
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{684FA660-D082-4A8C-AC8C-C9D449B21686}] DATAGRAM 0
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{684FA660-D082-4A8C-AC8C-C9D449B21686}] SEQPACKET 1
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{D90E04F2-3AD9-4F98-9464-751E106D7E6A}] SEQPACKET 1
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

```

```

SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{D90E04F2-3AD9-4F98-9464-751E106D7E6A}] DATAGRAM 1
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{3F1BA297-E685-416B-82D7-70E771CC8745}] SEQPACKET 2
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{3F1BA297-E685-416B-82D7-70E771CC8745}] DATAGRAM 2
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{D90E04F2-3AD9-4F98-9464-751E106D7E6A}] SEQPACKET 2
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

```

```
SupportsGuaranteedBandwidth False
SupportsMulticasting False
```

[WinSock]

Item	Value
File	c:\winnt\system32\winsock.dll
Version	3.10
Size	2.80 KB (2,864 bytes)
File	c:\winnt\system32\wsock32.dll
Version	5.00.2195.2871
Size	21.27 KB (21,776 bytes)

[Ports]

[Following are sub-categories of this main category]

[Serial]

Item	Value
Name	COM1
Status	OK
PNP Device ID	ACPI\PNP0501\0
Maximum Input Buffer Size	0
Maximum Output Buffer Size	False
Settable Baud Rate	True
Settable Data Bits	True
Settable Flow Control	True
Settable Parity	True
Settable Parity Check	True
Settable Stop Bits	True
Settable RLSD	True
Supports RLSD	True
Supports 16 Bit Mode	False
Supports Special Characters	False
Baud Rate	9600
Bits/Byte	8
Stop Bits	1
Parity	None
Busy	0
Abort Read/Write on Error	0
Binary Mode Enabled	-1
Continue XMit on XOff	0
CTS Outflow Control	0
Discard NULL Bytes	0
DSR Outflow Control	0
DSR Sensitivity	0
DTR Flow Control Type	Enable
EOF Character	0
Error Replace Character	0
Error Replacement Enabled	0
Event Character	0
Parity Check Enabled	0
RTS Flow Control Type	Enable
XOff Character	19
XOffXMit Threshold	512
XOn Character	17
XOnXmit Threshold	2048
XOnXOff InFlow Control	0

XOnXOff	OutFlow Control	0
IRQ Number	4	
I/O Port	0x03F8-0x03FF	
Driver	c:\winnt\system32\drivers\serial.sys (62416, 5.00.2195.2780)	

[Parallel]

Item	Value
No parallel port information	

[Storage]

[Following are sub-categories of this main category]

[Drives]

Item	Value
Drive	A:
Description	3 1/2 Inch Floppy Drive
Drive	C:
Description	Local Fixed Disk
Compressed	False
File System	NTFS
Size	33.91 GB (36,414,734,336 bytes)
Free Space	31.71 GB (34,047,107,072 bytes)
Volume Name	
Volume Serial Number	C8B488FA
Partition Disk #0, Partition #0	
Partition Size	33.91 GB (36,414,734,336 bytes)
Starting Offset	16384 bytes
Drive Description	Disk drive
Drive Manufacturer	(Standard disk drives)
Drive Model	COMPAQ LOGICAL VOLUME SCSI Disk
Device	
Drive BytesPerSector	512
Drive MediaLoaded	True
Drive MediaType	Fixed hard disk media
Drive Partitions	1
Drive SCSIIBus	0
Drive SCSILogicalUnit	0
Drive SCSIPort	2
Drive SCSCITargetId	4
Drive SectorsPerTrack	32
Drive Size	36414750720 bytes
Drive TotalCylinders	8716
Drive TotalSectors	71122560
Drive TotalTracks	2222580
Drive TracksPerCylinder	255

[SCSI]

Item	Value
Name	Smart Array 5i
Caption	Smart Array 5i
Driver	cpqciimm
Status	OK

PNP Device ID	PCI\VEN_0E11&DEV_B178&SUBSYS_40800E11&REV_0
1\3&267A616A&0&20	
Device ID	PCI\VEN_0E11&DEV_B178&SUBSYS_40800E11&REV_0
1\3&267A616A&0&20	
Device Map	Not Available
Index	Not Available
Max Number Controlled	Not Available
IRQ Number	31
I/O Port	0x2800-0x28FF
Driver	c:\winnt\system32\drivers\cpqciimm.sys (15568, 5.42.2.32 Build 1)

[Printing]

Name	Port Name	Server Name
No printing information		

[Problem Devices]

Device	PNP Device ID	Error Code
No Problem Devices		

Device	PNP Device ID
Standard	OpenHCD USB Host Controller
	PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_0
5\3&267A616A&0&7A	
USB Root Hub	USB\ROOT_HUB\4&AF5358C&0

[Software Environment]

[Following are sub-categories of this main category]

[Drivers]

Name	Description	File	Type
	Started	Start Mode	State
	Status	Error Control	Accept Pause
	Accept Stop		
abiosdsk	Abiosdsk	Not Available	Kernel Driver
		False	Disabled Stopped OK
		Ignore	False False
abp480n5	abp480n5	Not Available	Kernel Driver
		False	Disabled Stopped OK
		Normal	False False
acpi	Microsoft ACPI Driver	c:\winnt\system32\drivers\acpi.sys	
	Kernel Driver	True	Boot
	Running	OK	Normal False
	True		
acpiec	ACPIEC	c:\winnt\system32\drivers\acpiec.sys	
	Kernel Driver	False	Disabled
	Stopped	OK	Normal False
	False		
adpu160m	adpu160m	Not Available	Kernel Driver
		False	Disabled Stopped OK
		Normal	False False

			Running	OK	Normal	False			
afd	AFD Networking Support Environment	c:\winnt\system32\drivers\afds.sys							
	Kernel Driver	True	Auto						
	Running	OK	Normal	False					
	True								
ahal154x	Ahal154x	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Normal	False	False						
aic116x	aic116x	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Normal	False	False						
aic78u2	aic78u2	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Normal	False	False						
aic78xx	aic78xx	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Normal	False	False						
alkernel	Altiris Kernel Driver	c:\winnt\system32\drivers\alkernel.sys							
	Kernel Driver	True	Manual						
	Running	OK	Normal	False					
	True								
ami0nt	ami0nt	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Normal	False	False						
amsint	amsint	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Normal	False	False						
asc	asc	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Normal	False	False						
asc3350p	asc3350p	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Normal	False	False						
asc3550	asc3550	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Normal	False	False						
asyncmac	RAS Asynchronous Media Driver	c:\winnt\system32\drivers\asyncmac.sys							
	Kernel Driver	False	Manual						
	Stopped	OK	Normal	False					
	False								
atapi	Standard IDE/ESDI Hard Disk Controller	c:\winnt\system32\drivers\atapi.sys							
	Kernel Driver	True	Boot						
	Running	OK	Normal	False					
	True								
atdisk	Atdisk	Not Available	Kernel Driver						
	False	Disabled	Stopped	OK					
	Ignore	False	False						
atirage3	atirage3	c:\winnt\system32\drivers\atimpab.sys							
	Kernel Driver	True	Manual						
	Running	OK	Ignore	False					
	True								
atmarpc	ATM ARP Client Protocol	c:\winnt\system32\drivers\atmarpc.sys							
	Kernel Driver	False	Manual						
	Stopped	OK	Normal	False					
	False								
audstub	Audio Stub Driver	c:\winnt\system32\drivers\audstub.sys							
	Kernel Driver	True	Manual						

flashpnt	flashpnt	Not Available	Kernel Driver
	False	Disabled	Stopped OK
	Normal	False	False
flpydisk	Floppy Disk Driver	c:\winnt\system32\drivers\flpydisk.sys	
	Kernel Driver	True	Manual
	Running	OK	Normal False
	True		
ftdisk	Volume Manager Driver	c:\winnt\system32\drivers\ftdisk.sys	
	Kernel Driver	True	Boot
	Running	OK	Normal False
	True		
gpc	Generic Packet Classifier	c:\winnt\system32\drivers\msgpc.sys	
	Kernel Driver	True	Manual
	Running	OK	Normal False
	True		
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver	c:\winnt\system32\drivers\i8042prt.sys	
	Kernel Driver	True	System
	Running	OK	Normal False
	True		
ini910u	ini910u	Not Available	Kernel Driver
	False	Disabled	Stopped OK
	Normal	False	False
intelide	IntelIDE	Not Available	Kernel Driver
	False	Disabled	Stopped OK
	Normal	False	False
ipfilterdriver	IP Traffic Filter Driver	c:\winnt\system32\drivers\ipfltrv.sys	
	Kernel Driver	False	Manual
	Stopped	OK	Normal False
	False		
ipinip	IP in IP Tunnel Driver	c:\winnt\system32\drivers\ipinip.sys	
	Kernel Driver	False	Manual
	Stopped	OK	Normal False
	False		
ipnat	IP Network Address Translator	c:\winnt\system32\drivers\ipnat.sys	
	Kernel Driver	False	Manual
	Stopped	OK	Normal False
	False		
ipsec	IPSEC driver	c:\winnt\system32\drivers\ipsec.sys	
	Kernel Driver	True	Manual
	Running	OK	Normal False
	True		
ipsraiden	ipsraiden	Not Available	Kernel Driver
	False	Disabled	Stopped OK
	Normal	False	False
isapnp	PnP ISA/EISA Bus Driver	c:\winnt\system32\drivers\isapnp.sys	
	Kernel Driver	True	Boot
	Running	OK	Critical False
	True		
kbdclass	Keyboard Class Driver	c:\winnt\system32\drivers\kbdclass.sys	
	Kernel Driver	True	System
	Running	OK	Normal False
	True		
ksecdd	KSecDD	c:\winnt\system32\drivers\ksecdd.sys	
	Kernel Driver	True	Boot
	Running	OK	Normal False
	True		
lbrtfdc	lbrtfdc	Not Available	Kernel Driver
	False	System	Stopped OK
	Ignore	False	False
lp6nds35	lp6nds35	Not Available	Kernel Driver
	False	Disabled	Stopped OK
	Normal	False	False
mnmdd	mnmdd	c:\winnt\system32\drivers\mnmdd.sys	
	Kernel Driver	True	System
	Running	OK	Ignore False
	True		
modem	Modem	c:\winnt\system32\drivers\modem.sys	
	Kernel Driver	False	Manual
	Stopped	OK	Ignore False
	False		
mouclass	Mouse Class Driver	c:\winnt\system32\drivers\mouclass.sys	
	Kernel Driver	True	System
	Running	OK	Normal False
	True		
mountmgr	MountMgr	c:\winnt\system32\drivers\mountmgr.sys	
	Kernel Driver	True	Boot
	Running	OK	Normal False
	True		
mraid35x	mraid35x	Not Available	Kernel Driver
	False	Disabled	Stopped OK
	Normal	False	False
mrxsmb	MRXSMB	c:\winnt\system32\drivers\mrxsmb.sys	
	File System Driver	True	System
	Running	OK	Normal False
	True		
msfs	Msfs	c:\winnt\system32\drivers\msfs.sys	
	File System Driver	True	System
	Running	OK	Normal False
	True		
mskssrv	Microsoft Streaming Service Proxy	c:\winnt\system32\drivers\mskssrv.sys	
	Kernel Driver	False	Manual
	Stopped	OK	Normal False
	False		
mspclock	Microsoft Streaming Clock Proxy	c:\winnt\system32\drivers\mspclock.sys	
	Kernel Driver	False	Manual
	Stopped	OK	Normal False
	False		
mspqlm	Microsoft Streaming Quality Manager Proxy	c:\winnt\system32\drivers\mspqlm.sys	
	Kernel Driver	False	Manual
	Stopped	OK	Normal False
	False		
mup	Mup	c:\winnt\system32\drivers\mup.sys	
	File System Driver	True	Boot
	Running	OK	Normal False
	True		
n100	Compaq Ethernet or Fast Ethernet NIC NT	c:\winnt\system32\drivers\n100nt5.sys	
Driver	Kernel Driver	False	Manual
	Stopped	OK	Normal False
	False		
ncrc710	Ncrc710	Not Available	Kernel Driver
	False	Disabled	Stopped OK
	Normal	False	False
ndis	NDIS System Driver	c:\winnt\system32\drivers\ndis.sys	
	Kernel Driver	True	Boot
	Running	OK	Normal False
	True		
ndistapi	Remote Access NDIS TAPI Driver	c:\winnt\system32\drivers\ndistapi.sys	
	Kernel Driver	True	Manual
	Running	OK	Normal False
	True		
ndiswan	Remote Access NDIS WAN Driver	c:\winnt\system32\drivers\ndiswan.sys	
	Kernel Driver	True	Manual
	Running	OK	Normal False
	True		
ndproxy	NDIS Proxy	c:\winnt\system32\drivers\ndproxy.sys	
	Kernel Driver	True	Manual
	Running	OK	Normal False
	True		
netbios	NetBIOS Interface	c:\winnt\system32\drivers\netbios.sys	
	File System Driver	True	System
	Running	OK	Normal False
	True		
netbt	NetBios over Tcpip	c:\winnt\system32\drivers\netbt.sys	
	Kernel Driver	True	System
	Running	OK	Normal False
	True		
netdetect	NetDetect	c:\winnt\system32\drivers\netdect.sys	
	Kernel Driver	False	Manual
	Stopped	OK	Normal False
	False		
npfs	Npfs	c:\winnt\system32\drivers\npfs.sys	
	File System Driver	True	System
	Running	OK	Normal False
	True		
ntfs	Ntfs	c:\winnt\system32\drivers\ntfs.sys	
	File System Driver	True	Disabled
	Running	OK	Normal False
	True		
null	Null	c:\winnt\system32\drivers\null.sys	
	Kernel Driver	True	System
	Running	OK	Normal False
	True		
nwlknkflt	IPX Traffic Filter Driver	c:\winnt\system32\drivers\nwlnkflt.sys	
	Kernel Driver	False	Manual
	Stopped	OK	Normal False
	False		

			Running	OK	Normal	False
	nwlnkfwd	IPX Traffic Forwarder Driver c:\winnt\system32\drivers\nwlnkfwd.sys	True			
	Kernel Driver	False Manual	ptilink	Direct Parallel Link Driver c:\winnt\system32\drivers\ptilink.sys		
	Stopped OK	Normal False		Kernel Driver True Manual		
openhci	Microsoft USB Open Host Controller Driver c:\winnt\system32\drivers\openhci.sys	Running OK Normal False		Running OK Normal False		
	Kernel Driver True Manual	True	q57w2k	Compaq NC7781 Gigabit Server Adapter c:\winnt\system32\drivers\q57w2k.sys		
	Stopped OK Ignore False	Parallel		Kernel Driver True Manual		
parallel	c:\winnt\system32\drivers\parallel.sys	Running OK Normal False		Running OK Normal False		
	Kernel Driver False Manual	True	ql1080	True		
	Stopped OK Ignore False	Parport		q11080 Not Available Kernel Driver		
parport	c:\winnt\system32\drivers\parport.sys	False		False Disabled Stopped OK		
	Kernel Driver False Manual	PartMgr	ql110wnt	Normal False False		
	Stopped OK Ignore False	c:\winnt\system32\drivers\partmgr.sys		Not Available Kernel Driver		
partmgr	Kernel Driver False Manual	False		False Disabled Stopped OK		
	Kernel Driver True Boot	ParVdm	ql11240	Normal False False		
parvdm	Running OK Normal False	c:\winnt\system32\drivers\parvdm.sys		Not Available Kernel Driver		
	True	Kernel Driver False Manual	ql12100	Normal False False		
pci	PCI Bus Driver c:\winnt\system32\drivers\pci.sys	Stopped OK Ignore False		Not Available Kernel Driver		
	Kernel Driver True Boot	PCIIDump	rasacd	False Disabled Stopped OK		
	Running OK Critical False	PCIIDump Not Available Kernel Driver		Normal False False		
pcidump	PCIIDE	False	rasl2tp	Remote Access Auto Connection Driver c:\winnt\system32\drivers\rasl2tp.sys		
	c:\winnt\system32\drivers\pciide.sys	True		Kernel Driver True System		
	Kernel Driver True Boot			Running OK Normal False		
pciide	Running OK Normal False	PCIIDE Not Available Kernel Driver		True		
	True	False System Stopped OK	raspti	WAN Miniport (L2TP) c:\winnt\system32\drivers\raspti.sys		
	Ignore False False			Kernel Driver True Manual		
pcmcia	PCMCIA	True		Running OK Normal False		
	c:\winnt\system32\drivers\pcmcia.sys	PCIIDE Not Available Kernel Driver		True		
	Kernel Driver True Boot	pcmcia False System Stopped OK	rca	Direct Parallel c:\winnt\system32\drivers\rca.sys		
	Running OK Normal False			Kernel Driver True Manual		
pdcomp	PDCOMP	True	Access	Running OK Normal False		
	Not Available Kernel Driver	pcmcia False System Stopped OK		True		
	False Manual Stopped OK	pdframe PDRFRAME Not Available Kernel Driver	rdbss	Microsoft Streaming Network Raw Channel c:\winnt\system32\drivers\rdbss.sys		
pdframe	Ignore False False			Kernel Driver False Manual		
	PDFRAME Not Available Kernel Driver			Running OK Normal False		
	False Manual Stopped OK	pdframe PDRFRAME Not Available Kernel Driver		True		
pdreli	PDRELI	Ignore False False	rdpdr	Terminal Server Device Redirector Driver c:\winnt\system32\drivers\rdpdr.sys		
	Not Available Kernel Driver			Kernel Driver True Manual		
	False Manual Stopped OK			Running OK Normal False		
pdrframe	PDRFRAME	Ignore False False		True		
	Not Available Kernel Driver	pdframe PDRFRAME Not Available Kernel Driver	rdpwd	RDPWD c:\winnt\system32\drivers\rdpwd.sys		
	False Manual Stopped OK			Kernel Driver True Manual		
	Ignore False False			Running OK Ignore False		
pptpminiport	PPTP Miniport (PPTP)	True	redbook	True		
	c:\winnt\system32\drivers\raspppt.sys	Kernel Driver True Manual		Digital CD Audio Playback Filter Driver c:\winnt\system32\drivers\redbook.sys		
	Kernel Driver True Manual			Kernel Driver False System		

	Stopped	OK	Ignore	False
	False			
tdipx	TDIPX	c:\winnt\system32\drivers\tdipx.sys	Kernel Driver	False Manual
	Stopped	OK	Ignore	False
	False			
tdnetb	TDNETB	c:\winnt\system32\drivers\tdnetb.sys	Kernel Driver	False Manual
	Stopped	OK	Ignore	False
	False			
tdpipe	TDPIPE	c:\winnt\system32\drivers\tdpipe.sys	Kernel Driver	False Manual
	Stopped	OK	Ignore	False
	False			
tdspx	TDSPX	c:\winnt\system32\drivers\tdspx.sys	Kernel Driver	False Manual
	Stopped	OK	Ignore	False
	False			
tdtcp	TDTCP	c:\winnt\system32\drivers\tdtcp.sys	Kernel Driver	True Manual
	Running	OK	Ignore	False
	True			
termdd	Terminal Device Driver	c:\winnt\system32\drivers\termdd.sys	Kernel Driver	True Auto
	Running	OK	Normal	False
	True			
tga	tga	Not Available	Kernel Driver	
	False	System	Stopped	OK
	Ignore	False		
udfs	Udfs	c:\winnt\system32\drivers\udfs.sys	File System Driver	False Disabled
	Stopped	OK	Normal	False
	False			
ultra66	ultra66	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	Normal	False		
update	Microcode Update Driver	c:\winnt\system32\drivers\update.sys	Kernel Driver	True Manual
	Running	OK	Normal	False
	True			
usbhub	Microsoft USB Standard Hub Driver	c:\winnt\system32\drivers\usbhub.sys	Kernel Driver	True Manual
	Running	OK	Normal	False
	True			
vgasave	VgaSave	c:\winnt\system32\drivers\vga.sys	Kernel Driver	True System
	Running	OK	Ignore	False
	True			
wanarp	Remote Access IP ARP Driver	c:\winnt\system32\drivers\wanarp.sys	Kernel Driver	True Manual
	Running	OK	Normal	False
	True			

	wdica	WDICA	Not Available	Kernel Driver	
		False	Manual	Stopped OK	
		Ignore	False	False	
		[Environment Variables]			
		Variable	Value	User Name	
		ComSpec	\$SystemRoot%\system32\cmd.exe	<SYSTEM>	
		Os2LibPath		%SystemRoot%\system32\os2\dll;	
				<SYSTEM>	
		Path		%SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbm;C:\Program Files\Microsoft SQL Server\80\Tools\BINN	<SYSTEM>
		windir	\$SystemRoot%	<SYSTEM>	
		OS	Windows_NT	<SYSTEM>	
		PROCESSOR_ARCHITECTURE	x86	<SYSTEM>	
		PROCESSOR_LEVEL	15	<SYSTEM>	
		PROCESSOR_IDENTIFIER	x86 Family 15 Model 2		
		Stepping	7	GenuineIntel	<SYSTEM>
		PROCESSOR_REVISION	0207	<SYSTEM>	
		NUMBER_OF_PROCESSORS	4	<SYSTEM>	
		PATHEXT			
			.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF		
		;%WSH%	<SYSTEM>		
		TEMP	\$SystemRoot%\TEMP	<SYSTEM>	
		TMP	\$SystemRoot%\TEMP	<SYSTEM>	
		TEMP	\$USERPROFILE%\Local Settings\Temp		
			CL73\Administrator		
		TMP	\$USERPROFILE%\Local Settings\Temp		
			CL73\Administrator		
		[Jobs]			
		[Following are sub-categories of this main category]			
		[Print]			
		Document	Size	Owner	Notify Status
			Time Submitted		Start Time
			Until Time		Elapsed Time
			Pages Printed		Job ID Priority
			Parameters		Driver Name
			Print Processor		Host Print Queue
			Data Type Name		
		Unknown	Unknown	Unknown	Unknown
			Unknown	Unknown	Unknown
			Unknown	Unknown	Unknown
			Unknown	Unknown	Unknown
			Unknown		
		[Network Connections]			
		Local Name	Remote Name	Type	
			Status	User Name	
		No network connections information			
		[Running Tasks]			

Name	Path	Process ID	Priority	Min
Working Set		Max Working Set	Start Time	
Version	Size	File Date		
system	idle process	Not Available	0	0
		Not Available	Not Available	Not Available
Available	Unknown	Unknown	Unknown	
system	Not Available	8	8	0
	1413120	Not Available	Unknown	
smss.exe	c:\winnt\system32\smss.exe	236	11	
	204800	1413120	9/2/2003 6:25:24 AM	
	5.00.2195.2901	44,27 KB (45,328 bytes)		
	12/7/1999 7:00:00 AM			
csrss.exe	Not Available	264	13	Not Available
	Available	Not Available	9/2/2003 6:25:26 AM	
	Unknown	Unknown	Unknown	
winlogon.exe	c:\winnt\system32\winlogon.exe	288	13	
	204800	1413120	9/2/2003 6:25:27 AM	
	5.00.2195.2953	173.77 KB (177,936 bytes)	5.00.2195.2953	12/7/1999
	7:00:00 AM			
services.exe	c:\winnt\system32\services.exe	316	9	
	204800	1413120	9/2/2003 6:25:27 AM	
	5.00.2195.2780	86.77 KB (88,848 bytes)	5.00.2195.2780	12/7/1999
	7:00:00 AM			
lsass.exe	c:\winnt\system32\lsass.exe	328	9	
	204800	1413120	9/2/2003 6:25:27 AM	
	5.00.2195.2964	32.77 KB (33,552 bytes)	5.00.2195.2964	
	12/7/1999 7:00:00 AM			
termsrv.exe	c:\winnt\system32\termsrv.exe	10	424	
	204800	1413120	9/2/2003	
	5.00.2195.2342	137.27 KB	5.00.2195.2342	
	(140,560 bytes)	9/13/2002 6:09:44 PM	(140,560 bytes)	
aclient.exe	c:\altiris\acclient\aclient.exe	532	8	
	204800	1413120	9/2/2003	
	9/2/2003 6:25:29 AM	5.6.69	5.6.69	3.83 MB
	(4,014,156 bytes)	1/10/2003 3:29:39 PM	(4,014,156 bytes)	
cpqrcmc.exe	c:\winnt\system32\cpqrcmc.exe	8	556	
	204800	1413120	9/2/2003	
	5.0.2.0	96.27 KB (98,576 bytes)	5.0.2.0	
	2/7/2001 4:40:24 PM			
rsys.exe	c:\benchcraft\rsys.exe	592	8	
	204800	1413120	9/2/2003 6:25:29 AM	
	Available	32.00 KB (32,768 bytes)	Available	Not Available
	6:30:57 PM			
svchost.exe	c:\winnt\system32\svchost.exe	8	616	
	204800	1413120	9/2/2003	
	5.0.2.0	96.27 KB (98,576 bytes)	5.0.2.0	
	6:25:29 AM			
sysdown.exe	c:\winnt\system32\sysdown.exe	8	604	
	204800	1413120	9/2/2003	
	5.0.2134.1	7.77 KB	5.0.2134.1	
	(7,952 bytes)	12/7/1999 7:00:00 AM	(7,952 bytes)	
winmgmt.exe	c:\winnt\system32\wbem\winmgmt.exe	8	744	
	204800	1413120	9/2/2003	
	1.50.1085.0029	192.08 KB	1.50.1085.0029	
	(196,685 bytes)	9/13/2002 6:09:52 PM	(196,685 bytes)	
svchost.exe	c:\winnt\system32\svchost.exe	8	760	
	204800	1413120	9/2/2003	
	5.00.2134.1	7.77 KB	5.00.2134.1	
	6:25:34 AM			

Name	Version	Size	File Date	Manufacturer
mstask.exe	c:\winnt\system32\mstask.exe	788		
8	204800	1413120	9/2/2003	
6:25:34 AM	4.71.2195.1	115.27 KB		
(118,032 bytes)	9/13/2002 6:09:32 PM			
inetinfo.exe	c:\winnt\system32\inetsrv\inetinfo.exe	796		
8	204800	1413120	9/2/2003	
6:25:34 AM	5.00.0984 14.27 KB (14,608 bytes)			
9/13/2002 6:10:42 PM				
dfssvc.exe	c:\winnt\system32\dfssvc.exe	748		
8	204800	1413120	9/2/2003	
6:25:39 AM	5.00.2195.2841	88.27 KB		
(90,384 bytes)	9/13/2002 6:09:18 PM			
svchost.exe	c:\winnt\system32\svchost.exe			
1076	8	204800	1413120	
9/2/2003 6:27:46 AM	5.00.2134.1			
7.77 KB (7,952 bytes)	12/7/1999			
7:00:00 AM				
csrss.exe	Not Available	560	13	Not Available
Available Not Available		9/2/2003 6:28:14 AM		
Unknown Unknown Unknown				
winlogon.exe	c:\winnt\system32\winlogon.exe			
608	13	204800	1413120	
9/2/2003 6:28:14 AM	5.00.2195.2953			
173.77 KB (177,936 bytes)	12/7/1999			
7:00:00 AM				
rdpclip.exe	c:\winnt\system32\rdpclip.exe			
1132	8	204800	1413120	
9/2/2003 6:28:32 AM	5.00.2174.1			
39.77 KB (40,720 bytes)	9/13/2002			
5:45:10 PM				
explorer.exe	c:\winnt\explorer.exe			
1232	8	204800	1413120	
9/2/2003 6:28:32 AM	5.00.3315.2846			
237.27 KB (242,960 bytes)	9/13/2002			
6:09:47 PM				
aclntusr.exe	c:\altiris\aclclient\aclntusr.exe			
1272	8	204800	1413120	
9/2/2003 6:28:33 AM	5, 6, 0, 50			
176.00 KB (180,224 bytes)	4/29/2003			
2:47:14 PM				
logon.scr	c:\winnt\system32\logon.scr	1240	4	
204800	1413120	5/2/2003 11:42:52 AM		
5.00.2195.2104	127.77 KB (130,832 bytes)			
9/13/2002 6:09:26 PM				
dllhost.exe	Not Available	764	8	
Not Available	Not Available			
5/2/2003 11:57:56 AM	Unknown			
Unknown Unknown				
mmc.exe	c:\winnt\system32\mmc.exe	5416	8	
204800	1413120	5/2/2003 4:22:23 PM		
5.00.2195.2301	589.27 KB (603,408 bytes)			
9/13/2002 6:09:26 PM				
rsvp.exe	c:\winnt\system32\rsvp.exe	1960	8	
204800	1413120	5/2/2003 4:23:09 PM		
5.00.2167.1	172.77 KB (176,912 bytes)			
12/7/1999 7:00:00 AM				
[Loaded Modules]				
Name	Version	Size	File Date	Manufacturer
Path				

traffic.dll	5.00.2139.1	30.77 KB
(31,504 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation	c:\winnt\system32\traffic.dll	
rsvp.exe	5.00.2167.1	172.77 KB (176,912 bytes)
Corporation	c:\winnt\system32\rsvp.exe	
wbemprox.dll	1.50.1085.0045	40.08 KB (41,040 bytes)
Microsoft Corporation	c:\winnt\system32\wbemprox.dll	
mlang.dll	5.00.3103.1000	510.77 KB (523,024 bytes)
Corporation	c:\winnt\system32\mlang.dll	
cabinet.dll	5.00.2147.1	54.77 KB (56,080 bytes)
Microsoft Corporation	c:\winnt\system32\cabinet.dll	
msinfo32.dll	5.00.2177.1	312.27 KB (319,760 bytes)
Microsoft Corporation	c:\program files\common_files\microsoft\shared\msinfo\msinfo32.dll	
mmcndmgr.dll	5.00.2178.1	815.27 KB (834,832 bytes)
Microsoft Corporation	c:\winnt\system32\mmcndmgr.dll	
msvcp50.dll	5.00.7051 552.50 KB (565,760 bytes)	
Corporation	c:\winnt\system32\msvcp50.dll	
mmc.exe	5.00.2195.2301	589.27 KB (603,408 bytes)
Corporation	c:\winnt\system32\mmc.exe	
logon.scr	5.00.2195.2104	127.77 KB (130,832 bytes)
Corporation	c:\winnt\system32\logon.scr	
aclntusr.exe	5, 6, 0, 50	176.00 KB (180,224 bytes)
Corporation	c:\altiris\aclclient\aclntusr.exe	
shdoclc.dll	5.00.3315.2879	324.50 KB (332,288 bytes)
Microsoft Corporation	c:\winnt\system32\shdoclc.dll	
linkinfo.dll	5.00.2134.1	15.77 KB (16,144 bytes)
Microsoft Corporation	c:\winnt\system32\linkinfo.dll	
powrprof.dll	5.00.3103.1000	13.27 KB (13,584 bytes)
Microsoft Corporation	c:\winnt\system32\powrprof.dll	
batmeter.dll	5.00.3103.1000	20.27 KB (20,752 bytes)
Microsoft Corporation	c:\winnt\system32\batmeter.dll	
stobject.dll	5.00.2195.2780	79.27 KB (81,168 bytes)
Microsoft Corporation	c:\winnt\system32\stobject.dll	
webcheck.dll	5.00.3315.1000	251.77 KB (257,808 bytes)
Microsoft Corporation	c:\winnt\system32\webcheck.dll	

msi.dll	1.11.2405.0	1.69 MB (1,767,184 bytes)
Corporation	c:\winnt\system32\msi.dll	
ntshriui.dll	5.00.2134.1	46.77 KB (47,888 bytes)
Microsoft Corporation	c:\winnt\system32\ntshriui.dll	
mydocs.dll	5.00.2920.0000	55.77 KB (57,104 bytes)
Microsoft Corporation	c:\winnt\system32\mydocs.dll	
browseui.dll	5.00.3315.2846	788.77 KB (807,696 bytes)
Microsoft Corporation	c:\winnt\system32\browseui.dll	
shdocvw.dll	5.00.3315.2879	1.05 MB (1,104,144 bytes)
Microsoft Corporation	c:\winnt\system32\shdocvw.dll	
explorer.exe	5.00.3315.2846	237.27 KB (242,960 bytes)
Microsoft Corporation	c:\winnt\explorer.exe	
rdpclip.exe	5.00.2174.1	39.77 KB (40,720 bytes)
Microsoft Corporation	c:\winnt\system32\rdpclip.exe	
cscui.dll	5.00.2195.2959	228.27 KB (233,744 bytes)
Corporation	c:\winnt\system32\cscui.dll	
tapisrv.dll	5.00.2195.2955	169.27 KB (173,328 bytes)
Microsoft Corporation	c:\winnt\system32\tapisrv.dll	
dfssvc.exe	5.00.2195.2841	88.27 KB (90,384 bytes)
Microsoft Corporation	c:\winnt\system32\dfssvc.exe	
dbnetlib.dll	2000.080.0194.00	84.06 KB (86,082 bytes)
Microsoft Corporation	c:\winnt\system32\dbnetlib.dll	
odbccp32.dll	3.520.6526.0	100.27 KB (102,672 bytes)
Microsoft Corporation	c:\winnt\system32\odbccp32.dll	
sqlsrv32.rll	2000.080.0194.00	88.00 KB (90,112 bytes)
Microsoft Corporation	c:\winnt\system32\sqlsrv32.rll	
mtxdm.dll	2000.2.3471.1	23.27 KB (23,824 bytes)
Corporation	c:\winnt\system32\mtxdm.dll	
tpcc_com_all.dll	1, 0, 0, 1	80.00 KB (81,920 bytes)
Microsoft Corporation	c:\inetpub\wwwroot\tpcc_c-2.dll	
sqlunir1.dll	2000.080.0194.00	176.06 KB (180,290 bytes)
Corporation	c:\winnt\system32\sqlunir1.dll	
sqlsvr32.dll	2000.080.0194.00	460.08 KB (471,119 bytes)
Microsoft Corporation	c:\winnt\system32\sqlsvr32.dll	

tpcc_odbcc.dll	Not Available	28.00 KB
(28,672 bytes)	9/13/2002 6:29:42 PM	Not Available
c:\inetpub\wwwroot\tpcc_odbcc.dll		
mfc42.dll	6.00.8665.0	972.05 KB (995,383 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft
c:\winnt\system32\mfc42.dll		
wam.dll	5.00.0984 70.77 KB (72,464 bytes)	
Corporation	9/13/2002 6:10:44 PM	Microsoft
c:\winnt\system32\inetsrv\wam.dll		
odbcint.dll	3.520.6526.0	88.00 KB (90,112 bytes)
Corporation	9/13/2002 6:19:39 PM	Microsoft Corporation
c:\winnt\system32\odbcint.dll		
odbc32.dll	3.520.6526.0	216.27 KB (221,456 bytes)
Corporation	9/13/2002 6:19:39 PM	Microsoft Corporation
c:\winnt\system32\odbc32.dll		
mtxoci.dll	2000.2.3471.1	101.77 KB (104,208 bytes)
Corporation	9/13/2002 6:09:33 PM	Microsoft Corporation
c:\winnt\system32\mtxoci.dll		
resutils.dll	5.00.2195.2787	39.77 KB (40,720 bytes)
Corporation	9/13/2002 6:09:40 PM	Microsoft Corporation
c:\winnt\system32\resutils.dll		
clusapi.dll	5.00.2195.2104	54.27 KB (55,568 bytes)
Corporation	9/13/2002 6:09:16 PM	Microsoft Corporation
c:\winnt\system32\clusapi.dll		
mtxclu.dll	2000.2.3471.1	51.27 KB (52,496 bytes)
Corporation	9/13/2002 6:09:33 PM	Microsoft Corporation
c:\winnt\system32\mtxclu.dll		
msdtcprx.dll	2000.2.3471.1	665.77 KB (681,744 bytes)
Corporation	9/13/2002 6:09:27 PM	Microsoft Corporation
c:\winnt\system32\msdtcprx.dll		
comsvcs.dll	2000.2.3471.1	1.35 MB (1,417,488 bytes)
Corporation	9/13/2002 6:09:17 PM	Microsoft Corporation
c:\winnt\system32\comsvcs.dll		
iislog.dll	5.00.0984 75.27 KB (77,072 bytes)	
Corporation	9/13/2002 6:10:42 PM	Microsoft
c:\winnt\system32\inetsrv\iislog.dll		
inetsloc.dll	5.00.0984 20.27 KB (20,752 bytes)	
Corporation	9/13/2002 6:09:24 PM	Microsoft
c:\winnt\system32\inetsloc.dll		
isatq.dll	5.00.0984 60.27 KB (61,712 bytes)	
Corporation	9/13/2002 6:10:43 PM	Microsoft
c:\winnt\system32\inetsrv\isatq.dll		
security.dll	5.00.2154.1	5.77 KB (5,904 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft Corporation
c:\winnt\system32\security.dll		
svcext.dll	5.00.0984 39.77 KB (40,720 bytes)	
Corporation	9/13/2002 6:10:44 PM	Microsoft
c:\winnt\system32\inetsrv\svcext.dll		
admxes.dll	5.00.0984 27.77 KB (28,432 bytes)	
Corporation	9/13/2002 6:10:41 PM	Microsoft

Corporation	c:\winnt\system32\inetsrv\admxes.dll	
wamreg.dll	5.00.0984 45.77 KB (46,864 bytes)	
Corporation	9/13/2002 6:10:44 PM	Microsoft
c:\winnt\system32\inetsrv\wamreg.dll		
metadata.dll	5.00.0984 68.77 KB (70,416 bytes)	
Corporation	9/13/2002 6:10:43 PM	Microsoft
c:\winnt\system32\inetsrv\metadata.dll		
iismap.dll	5.00.0984 55.77 KB (57,104 bytes)	
Corporation	9/13/2002 6:09:23 PM	Microsoft
c:\winnt\system32\iismap.dll		
nsepm.dll	5.00.0984 43.27 KB (44,304 bytes)	
Corporation	9/13/2002 6:10:43 PM	Microsoft
c:\winnt\system32\inetsrv\nsepm.dll		
admwpox.dll	5.00.0984 31.77 KB (32,528 bytes)	
Corporation	9/13/2002 5:45:33 PM	Microsoft
c:\winnt\system32\admwpox.dll		
coadmin.dll	5.00.0984 39.27 KB (40,208 bytes)	
Corporation	9/13/2002 6:10:41 PM	Microsoft
c:\winnt\system32\inetsrv\coadmin.dll		
iisadmin.dll	5.00.0984 15.27 KB (15,632 bytes)	
Corporation	9/13/2002 6:10:42 PM	Microsoft
c:\winnt\system32\inetsrv\iisadmin.dll		
rpcref.dll	5.00.0984 4.27 KB (4,368 bytes)	
Corporation	9/13/2002 6:10:43 PM	Microsoft
c:\winnt\system32\inetsrv\rpcref.dll		
iisrtl.dll	5.00.0984 119.77 KB (122,640 bytes)	
Corporation	9/13/2002 6:09:23 PM	Microsoft
c:\winnt\system32\iisrtl.dll		
inetinfo.exe	5.00.0984 14.27 KB (14,608 bytes)	
Corporation	9/13/2002 6:10:42 PM	Microsoft
c:\winnt\system32\inetsrv\inetinfo.exe		
msidle.dll	5.00.2920.0000	6.27 KB (6,416 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft Corporation
c:\winnt\system32\msidle.dll		
mstask.exe	4.71.2195.1	115.27 KB (118,032 bytes)
Corporation	9/13/2002 6:09:32 PM	Microsoft Corporation
c:\winnt\system32\mstask.exe		
netshell.dll	5.00.2195.2779	457.27 KB (468,240 bytes)
Corporation	9/13/2002 6:09:34 PM	Microsoft Corporation
c:\winnt\system32\netshell.dll		
netman.dll	5.00.2195.2779	89.27 KB (91,408 bytes)
Corporation	9/13/2002 6:09:34 PM	Microsoft Corporation
c:\winnt\system32\netman.dll		
rasdlg.dll	5.00.2195.2671	514.27 KB (526,608 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft Corporation
c:\winnt\system32\rasdlg.dll		
netcfgx.dll	5.00.2195.2228	534.77 KB (547,600 bytes)
Corporation	9/13/2002 6:09:34 PM	Microsoft Corporation
c:\winnt\system32\netcfgx.dll		

rasmans.dll	5.00.2195.2728	147.27 KB (150,800 bytes)
Corporation	9/13/2002 6:09:39 PM	Microsoft Corporation
c:\winnt\system32\rasmans.dll		
ntmsdba.dll	5.00.2195.2779	167.27 KB (171,280 bytes)
Corporation	9/13/2002 6:09:35 PM	Microsoft Corporation
c:\winnt\system32\ntmsdba.dll		
sens.dll	5.00.2163.1	36.77 KB (37,648 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft
c:\winnt\system32\sens.dll		
ntmssvc.dll	5.00.2195.2779	391.27 KB (400,656 bytes)
Corporation	9/13/2002 6:09:35 PM	Microsoft Corporation
c:\winnt\system32\ntmssvc.dll		
txfaux.dll	2000.2.3471.1	374.27 KB (383,248 bytes)
Corporation	9/13/2002 6:09:44 PM	Microsoft Corporation
c:\winnt\system32\txfaux.dll		
es.dll	2000.2.3471.1	222.27 KB (227,600 bytes)
Corporation	9/13/2002 6:09:21 PM	Microsoft
c:\winnt\system32\es.dll		
netutil.dll	5.00.2134.1	210.27 KB (215,312 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft Corporation
c:\winnt\system32\netutil.dll		
netui0.dll	5.00.2134.1	70.27 KB (71,952 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft Corporation
c:\winnt\system32\netui0.dll		
ntlanman.dll	5.00.2157.1	35.27 KB (36,112 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft Corporation
c:\winnt\system32\ntlanman.dll		
wshnetbs.dll	5.00.2134.1	7.77 KB (7,952 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft Corporation
c:\winnt\system32\wshnetbs.dll		
provthrd.dll	1.50.1085.0000	68.07 KB (69,708 bytes)
Corporation	9/13/2002 5:45:53 PM	Microsoft Corporation
c:\winnt\system32\wbem\provthrd.dll		
ntevt.dll	1.50.1085.0000	192.06 KB (196,669 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft
c:\winnt\system32\wbem\ntevt.dll		
perfos.dll	5.00.2155.1	21.27 KB (21,776 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft Corporation
c:\winnt\system32\perfos.dll		
wmi.dll	5.00.2191.1	6.27 KB (6,416 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft
c:\winnt\system32\wmi.dll		
framedyn.dll	1.50.1085.0000	164.05 KB (167,992 bytes)
Corporation	12/7/1999 7:00:00 AM	Microsoft Corporation
c:\winnt\system32\wbem\framedyn.dll		
cimwin32.dll	1.50.1085.0038	1.02 MB (1,073,232 bytes)
Corporation	9/13/2002 6:09:50 PM	Microsoft Corporation
c:\winnt\system32\wbem\cimwin32.dll		
wbemsrv.dll	1.50.1085.0007	40.07 KB (41,036 bytes)
Corporation	9/13/2002 6:09:52 PM	Microsoft

```

Microsoft Corporation
c:\winnt\system32\wbem\wbemsvc.dll
wbemess.dll 1.50.1085.0039 364.07 KB
(372,804 bytes) 9/13/2002 6:09:52 PM
Microsoft Corporation
c:\winnt\system32\wbem\wbemess.dll
fastprox.dll 1.50.1085.0037 144.08 KB
(147,536 bytes) 9/13/2002 6:09:51 PM
Microsoft Corporation
c:\winnt\system32\wbem\fastprox.dll
wbemcore.dll 1.50.1085.0036 628.07 KB
(643,140 bytes) 9/13/2002 6:09:52 PM
Microsoft Corporation
c:\winnt\system32\wbem\wbemcore.dll
wbemcomm.dll 1.50.1085.0021 692.07 KB
(708,675 bytes) 9/13/2002 6:09:51 PM
Microsoft Corporation
c:\winnt\system32\wbem\wbemcomm.dll
winmgmt.exe 1.50.1085.0029 192.08 KB
(196,685 bytes) 9/13/2002 6:09:52 PM
Microsoft Corporation
c:\winnt\system32\wbem\winmgmt.exe
utildd.dll 5.00.2153.1 25.77 KB
(26,384 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\utildd.dll
wtsapi32.dll 5.00.2134.1 14.27 KB
(14,608 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\wtsapi32.dll
sysdown.exe 5.27.2195.0 34.77 KB
(35,600 bytes) 11/25/2002 5:08:19 AM
Compaq Computer Corporation
c:\winnt\system32\sysdown.exe
rpcss.dll 5.00.2195.2815 231.27 KB (236,816
bytes) 9/13/2002 6:09:40 PM Microsoft
Corporation c:\winnt\system32\rpcss.dll
svchost.exe 5.00.2134.1 7.77 KB
(7,952 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\svchost.exe
rsys.exe Not Available 32.00 KB (32,768 bytes)
9/13/2002 6:30:57 PM Not Available
c:\benchcraft\rsys.exe
cpqrcmc.exe 5.0.2.0 96.27 KB (98,576 bytes)
2/7/2001 4:40:24 PM Compaq
c:\winnt\system32\cpqrcmc.exe
ntmarta.dll 5.00.2195.2862 98.77 KB
(101,136 bytes) 9/13/2002 6:09:35 PM
Microsoft Corporation
c:\winnt\system32\ntmarta.dll
psapi.dll 5.00.2134.1 28.27 KB (28,944 bytes)
12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\psapi.dll
riched20.dll 5.30.23.1205 421.27 KB
(431,376 bytes) 9/13/2002 6:09:40 PM
Microsoft Corporation
c:\winnt\system32\riched20.dll
riched32.dll 5.00.2134.1 3.77 KB
(3,856 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\riched32.dll

```

```

comdlg32.dll 5.00.3103.1000 236.77 KB
(242,448 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\comdlg32.dll
aclient.exe 5.6.69 3.83 MB (4,014,156
bytes) 1/10/2003 3:29:39 PM Altiris, Inc.
c:\altiris\aclient\aclient.exe
rdpwsx.dll 5.00.2180.1 94.40 KB
(96,664 bytes) 9/13/2002 5:45:10 PM
Microsoft Corporation
c:\winnt\system32\rdpwsx.dll
mstlsapi.dll 5.00.2181.1 24.77 KB
(25,360 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\mstlsapi.dll
icaapi.dll 5.00.2134.1 118.77 KB
(121,616 bytes) 9/13/2002 5:45:09 PM
Microsoft Corporation
c:\winnt\system32\icaapi.dll
regapi.dll 5.00.2155.1 35.27 KB
(36,112 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\regapi.dll
termsrv.exe 5.00.2195.2342 137.27 KB
(140,560 bytes) 9/13/2002 6:09:44 PM
Microsoft Corporation
c:\winnt\system32\termsrv.exe
iissuba.dll 5.00.0984 9.77 KB (10,000 bytes)
12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\iissuba.dll
dssenh.dll 5.00.2195.2228 142.77 KB
(146,192 bytes) 9/13/2002 6:10:37 PM
Microsoft Corporation
c:\winnt\system32\dssenh.dll
mfc42u.dll 6.00.8665.0 972.05 KB
(995,384 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\mfc42u.dll
polagent.dll 5.00.2183.1 108.27 KB
(110,864 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\polagent.dll
scecli.dll 5.00.2195.2780 105.27 KB
(107,792 bytes) 9/13/2002 6:09:41 PM
Microsoft Corporation
c:\winnt\system32\scecli.dll
atl.dll 3.00.8449 57.56 KB (58,938 bytes)
12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\atl.dll
certcli.dll 5.00.2195.2778 130.77 KB
(133,904 bytes) 9/13/2002 6:09:16 PM
Microsoft Corporation
c:\winnt\system32\certcli.dll
mswsock.dll 5.00.2195.2871 62.77 KB
(64,272 bytes) 9/13/2002 6:09:33 PM
Microsoft Corporation
c:\winnt\system32\mswsock.dll
ntdsatq.dll 5.00.2195.2878 31.27 KB
(32,016 bytes) 9/13/2002 6:09:35 PM

```

```

Microsoft Corporation
c:\winnt\system32\ntdsatq.dll
ntdsa.dll 5.00.2195.2899 990.77 KB (1,014,544
bytes) 9/13/2002 6:09:34 PM Microsoft
Corporation c:\winnt\system32\ntdsa.dll
kdcsvc.dll 5.00.2195.2878 137.77 KB
(141,072 bytes) 9/13/2002 6:09:26 PM
Microsoft Corporation
c:\winnt\system32\kdcsvc.dll
sfmapi.dll 5.00.2134.1 38.77 KB
(39,696 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\sfmapi.dll
rassfm.dll 5.00.2195.2671 21.27 KB
(21,776 bytes) 9/13/2002 6:09:39 PM
Microsoft Corporation
c:\winnt\system32\rassfm.dll
mpr.dll 5.00.2195.2779 53.27 KB (54,544 bytes)
9/13/2002 6:09:27 PM Microsoft
Corporation c:\winnt\system32\mpr.dll
rsabase.dll 5.00.2195.2228 128.27 KB
(131,344 bytes) 5/4/2001 12:05:02 PM
Microsoft Corporation
c:\winnt\system32\rsabase.dll
schannel.dll 5.00.2195.2922 138.27 KB
(141,584 bytes) 5/4/2001 12:05:02 PM
Microsoft Corporation
c:\winnt\system32\schannel.dll
netlogon.dll 5.00.2195.2865 357.77 KB
(366,352 bytes) 9/13/2002 6:09:34 PM
Microsoft Corporation
c:\winnt\system32\netlogon.dll
kerberos.dll 5.00.2195.2913 198.77 KB
(203,536 bytes) 9/13/2002 6:09:26 PM
Microsoft Corporation
c:\winnt\system32\kerberos.dll
msprives.dll 5.00.2154.1 41.50 KB
(42,496 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\msprives.dll
samsrv.dll 5.00.2195.2918 369.77 KB
(378,640 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\samsrv.dll
lsasrv.dll 5.00.2195.2964 492.77 KB
(504,592 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\lsasrv.dll
lsass.exe 5.00.2195.2964 32.77 KB (33,552 bytes)
12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\lsass.exe
ntlsapi.dll 5.00.2134.1 6.77 KB
(6,928 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\ntlsapi.dll
xactsrv.dll 5.00.2134.1 90.27 KB
(92,432 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\xactsrv.dll
wmicore.dll 5.00.2195.2842 72.27 KB
(74,000 bytes) 9/13/2002 6:09:46 PM
Microsoft Corporation
c:\winnt\system32\wmicore.dll

```

netevent.dll	5.00.2170.1	191.00 KB
(195,584 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\netevent.dll		
esent.dll	6.0.3940.13	1.08 MB (1,135,376 bytes)
9/13/2002 6:09:21 PM	Microsoft Corporation	
c:\winnt\system32\esent.dll		
browser.dll	5.00.2195.2778	48.27 KB
(49,424 bytes)	9/13/2002 6:09:14 PM	
Microsoft Corporation		
c:\winnt\system32\browser.dll		
psbase.dll	5.00.2195.2779	111.77 KB
(114,448 bytes)	9/13/2002 6:09:39 PM	
Microsoft Corporation		
c:\winnt\system32\psbase.dll		
cryptsvc.dll	5.00.2181.1	61.77 KB
(63,248 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\cryptsvc.dll		
trkwks.dll	5.00.2166.1	88.77 KB
(90,896 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\trkwks.dll		
seclogon.dll	5.00.2135.1	15.77 KB
(16,144 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\seclogon.dll		
cryptdll.dll	5.00.2135.1	41.27 KB
(42,256 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\cryptdll.dll		
wkssvc.dll	5.00.2195.2780	95.27 KB
(97,552 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\wkssvc.dll		
srsvcs.dll	5.00.2195.2904	79.27 KB
(81,168 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\srsvcs.dll		
cfgmgr32.dll	5.00.2134.1	16.77 KB
(17,168 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\cfgmgr32.dll		
dmserver.dll	2195.2778.297.3	11.77 KB
(12,048 bytes)	9/13/2002 6:09:19 PM	
VERITAS Software Corp.		
c:\winnt\system32\dmserver.dll		
lmhsvc.dll	5.00.2195.2778	9.77 KB
(10,000 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\lmhsvc.dll		
eventlog.dll	5.00.2178.1	43.77 KB
(44,816 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\eventlog.dll		
scesrv.dll	5.00.2195.2780	226.27 KB
(231,696 bytes)	9/13/2002 6:09:41 PM	
Microsoft Corporation		
c:\winnt\system32\scesrv.dll		
umpnppmgr.dll	5.00.2182.1	86.27 KB
(88,336 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\umpnppmgr.dll		

services.exe	5.00.2195.2780	86.77 KB
(88,848 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\services.exe		
wininet.dll	5.00.3315.1000	456.77 KB
(467,728 bytes)	9/13/2002 6:09:46 PM	
Microsoft Corporation		
c:\winnt\system32\wininet.dll		
cryptnet.dll	5.131.2157.1	41.77 KB
(42,768 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\cryptnet.dll		
msv1_0.dll	5.00.2195.2900	111.77 KB
(114,448 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\msv1_0.dll		
ntdsapi.dll	5.00.2195.2661	55.77 KB
(57,104 bytes)	9/13/2002 6:09:35 PM	
Microsoft Corporation		
c:\winnt\system32\ntdsapi.dll		
rasadhlplib.dll	5.00.2168.1	7.27 KB
(7,440 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\rasadhlplib.dll		
winrnr.dll	5.00.2160.1	18.77 KB
(19,216 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\winrnr.dll		
rnr20.dll	5.00.2195.2871	35.77 KB (36,624 bytes)
9/13/2002 6:09:40 PM	Microsoft Corporation	
c:\winnt\system32\rnr20.dll		
clbcatq.dll	2000.2.3471.1	496.77 KB
(508,688 bytes)	9/13/2002 6:09:16 PM	
Microsoft Corporation		
c:\winnt\system32\clbcatq.dll		
dhcpcsvc.dll	5.00.2195.2778	88.77 KB
(90,896 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\dhcpcsvc.dll		
tapi32.dll	5.00.2182.1	123.27 KB
(126,224 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\tapi32.dll		
rasman.dll	5.00.2195.2780	54.77 KB
(56,080 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\rasman.dll		
rasapi32.dll	5.00.2195.2671	189.77 KB
(194,320 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\rasapi32.dll		
rtutils.dll	5.00.2168.1	43.77 KB
(44,816 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\rtutils.dll		
adsldpc.dll	5.00.2195.2842	127.27 KB
(130,320 bytes)	9/13/2002 6:09:12 PM	
Microsoft Corporation		
c:\winnt\system32\adsldpc.dll		
activateds.dll	5.00.2195.2778	174.77 KB
(178,960 bytes)	9/13/2002 6:09:09 PM	
Microsoft Corporation		
c:\winnt\system32\activateds.dll		

oleaut32.dll	2.40.4517	612.27 KB (626,960 bytes)
12/7/1999 7:00:00 AM	Microsoft Corporation	
c:\winnt\system32\oleaut32.dll		
mprapi.dll	5.00.2181.1	79.27 KB
(81,168 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\mprapi.dll		
icmp.dll	5.00.2134.1	7.27 KB (7,440 bytes)
12/7/1999 7:00:00 AM	Microsoft Corporation	
c:\winnt\system32\icmp.dll		
iphlpapi.dll	5.00.2173.2	67.77 KB
(69,392 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\iphlpapi.dll		
wshtcpip.dll	5.00.2195.2104	17.27 KB
(17,680 bytes)	9/13/2002 6:09:46 PM	
Microsoft Corporation		
c:\winnt\system32\wshtcpip.dll		
msafd.dll	5.00.2195.2779	106.77 KB (109,328 bytes)
9/13/2002 6:09:27 PM	Microsoft Corporation	
c:\winnt\system32\msafd.dll		
winspool.drv	5.00.2195.2780	109.77 KB
(112,400 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\winspool.drv		
winscard.dll	5.00.2134.1	77.27 KB
(79,120 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\winscard.dll		
wlnotify.dll	5.00.2195.2780	53.77 KB
(55,056 bytes)	9/13/2002 6:09:46 PM	
Microsoft Corporation		
c:\winnt\system32\wlnotify.dll		
cscdll.dll	5.00.2195.2401	98.27 KB
(100,624 bytes)	9/13/2002 6:09:17 PM	
Microsoft Corporation		
c:\winnt\system32\cscdll.dll		
lz32.dll	5.00.2134.1	9.77 KB (10,000 bytes)
12/7/1999 7:00:00 AM	Microsoft Corporation	
c:\winnt\system32\lz32.dll		
version.dll	5.00.2134.1	15.77 KB
(16,144 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\version.dll		
rsaenh.dll	5.00.2195.2228	130.77 KB
(133,904 bytes)	9/13/2002 6:10:37 PM	
Microsoft Corporation		
c:\winnt\system32\rsaenh.dll		
mscat32.dll	5.131.2134.1	7.77 KB
(7,952 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\mscat32.dll		
ole32.dll	5.00.2195.2887	969.77 KB (993,040 bytes)
9/13/2002 6:09:38 PM	Microsoft Corporation	
c:\winnt\system32\ole32.dll		
imagehlp.dll	5.00.2195.2778	125.77 KB
(128,784 bytes)	5/4/2001 12:05:02 PM	
Microsoft Corporation		
c:\winnt\system32\imagehlp.dll		
msasn1.dll	5.00.2134.1	51.27 KB
(52,496 bytes)	12/7/1999 7:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\msasn1.dll		

```

crypt32.dll      5.131.2195.2833    451.27 KB
(462,096 bytes) 9/13/2002 6:09:17 PM
  Microsoft Corporation
    c:\winnt\system32\crypt32.dll
wintrust.dll     5.131.2195.2779    162.27 KB
(166,160 bytes) 9/13/2002 6:09:46 PM
  Microsoft Corporation
    c:\winnt\system32\wintrust.dll
shlwapi.dll      5.00.3315.1000    282.77 KB
(289,552 bytes) 9/13/2002 6:09:42 PM
  Microsoft Corporation
    c:\winnt\system32\shlwapi.dll
shell32.dll      5.00.3315.2902    2.25 MB
(2,359,056 bytes) 9/13/2002 6:09:42 PM
  Microsoft Corporation
    c:\winnt\system32\shell32.dll
msgina.dll       5.00.2195.2779    324.27 KB
(332,048 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\msgina.dll
comct132.dll     5.81          537.77 KB (550,672
bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\comct132.dll
setupapi.dll     5.00.2195.2663    555.77 KB
(569,104 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\setupapi.dll
winmm.dll        5.00.2161.1     184.77 KB (189,200
bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\winmm.dll
winsta.dll       5.00.2195.2386    36.77 KB
(37,648 bytes) 9/13/2002 6:09:46 PM
  Microsoft Corporation
    c:\winnt\system32\winsta.dll
wsock32.dll      5.00.2195.2871    21.27 KB
(21,776 bytes) 9/13/2002 6:09:46 PM
  Microsoft Corporation
    c:\winnt\system32\wsock32.dll
dnsapi.dll       5.00.2195.2785    130.77 KB
(133,904 bytes) 9/13/2002 6:09:19 PM
  Microsoft Corporation
    c:\winnt\system32\dnsapi.dll
wldap32.dll      5.00.2195.2797    125.27 KB
(128,272 bytes) 9/13/2002 6:09:46 PM
  Microsoft Corporation
    c:\winnt\system32\wldap32.dll
ws2help.dll      5.00.2134.1     17.77 KB
(18,192 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\ws2help.dll
ws2_32.dll       5.00.2195.2780    67.77 KB
(69,392 bytes) 9/13/2002 6:09:46 PM
  Microsoft Corporation
    c:\winnt\system32\ws2_32.dll
samlib.dll       5.00.2195.2780    49.77 KB
(50,960 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\samlib.dll
netrap.dll       5.00.2134.1     11.27 KB
(11,536 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\netrap.dll

```

```

netapi32.dll      5.00.2195.2808    303.77 KB
(311,056 bytes) 9/13/2002 6:09:34 PM
  Microsoft Corporation
    c:\winnt\system32\netapi32.dll
profmap.dll      5.00.2181.1     29.27 KB
(29,968 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\profmap.dll
secur32.dll      5.00.2195.2862    46.77 KB
(47,888 bytes) 9/13/2002 6:09:41 PM
  Microsoft Corporation
    c:\winnt\system32\secur32.dll
sfc.dll          5.00.2195.2896    92.11 KB (94,320 bytes)
9/13/2002 6:09:41 PM
  Microsoft Corporation
    c:\winnt\system32\sfc.dll
nddeapi.dll      5.00.2137.1     15.27 KB
(15,632 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\nddeapi.dll
userenv.dll      5.00.2195.2780    361.77 KB
(370,448 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\userenv.dll
user32.dll       5.00.2195.2821    392.77 KB
(402,192 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\user32.dll
gdi32.dll        5.00.2195.2778    228.77 KB (234,256
bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\gdi32.dll
rpcrt4.dll       5.00.2195.2832    437.27 KB
(447,760 bytes) 9/13/2002 6:09:40 PM
  Microsoft Corporation
    c:\winnt\system32\rpcrt4.dll
advapi32.dll     5.00.2195.2867    351.77 KB
(360,208 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\advapi32.dll
kernel32.dll     5.00.2195.2778    714.77 KB
(731,920 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\kernel32.dll
msvcrt.dll       6.10.8924.0     284.05 KB
(290,869 bytes) 5/4/2001 12:05:02 PM
  Microsoft Corporation
    c:\winnt\system32\msvcrt.dll
winlogon.exe     5.00.2195.2953    173.77 KB
(177,936 bytes) 12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\winlogon.exe
sfcfiles.dll     5.00.2195.2967    948.27 KB
(971,024 bytes) 9/13/2002 6:09:41 PM
  Microsoft Corporation
    c:\winnt\system32\sfcfiles.dll
ntdll.dll        5.00.2195.2779    478.77 KB (490,256
bytes) 5/4/2001 12:05:02 PM
  Microsoft Corporation
    c:\winnt\system32\ntdll.dll
smss.exe         5.00.2195.2901    44.27 KB (45,328 bytes)
12/7/1999 7:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\smss.exe
[Services]

```

	Display Name	Name	State	Start Mode
	Service Type	Path	Error Control	
	Start Name	Tag ID		
Altiris Client Service	AClient	Running	Auto	Own Process
	c:\altiris\client\aclient.exe	-service	Normal	LocalSystem
Alerter	Alerter	Stopped	Manual	Share Process
	c:\winnt\system32\services.exe		Normal	LocalSystem
Application Management	AppMgmt	Stopped	Manual	Share Process
	c:\winnt\system32\services.exe		Normal	LocalSystem
Computer Browser	Browser	Running	Auto	Share Process
	c:\winnt\system32\services.exe		Normal	LocalSystem
Indexing Service	cisvc	Stopped	Manual	Share Process
	c:\winnt\system32\cisvc.exe		Normal	LocalSystem
ClipBook	ClipSrv	Stopped	Manual	Own Process
	c:\winnt\system32\clipsrv.exe		Normal	LocalSystem
Compaq Remote Monitor Service	CpqRcmc	Running	Auto	Own Process
	c:\winnt\system32\cpqrcmc.exe		Normal	LocalSystem
Distributed File System	Dfs	Running	Auto	Own Process
	c:\winnt\system32\dfssvc.exe		Normal	LocalSystem
DHCP Client	Dhcp	Running	Auto	Share Process
	c:\winnt\system32\services.exe		Normal	LocalSystem
Logical Disk Manager	Administrative Service			
	dmadmin	Stopped	Manual	Share Process
	c:\winnt\system32\dmadmin.exe	/com	Normal	LocalSystem
Logical Disk Manager	dmserver	Running	Auto	Share Process
	c:\winnt\system32\services.exe		Normal	LocalSystem
DNS Client	Dnscache	Stopped	Manual	Share Process
	c:\winnt\system32\services.exe		Normal	LocalSystem
Event Log	Eventlog	Running	Auto	Share Process
	c:\winnt\system32\services.exe		Normal	LocalSystem
COM+ Event System	EventSystem	Running	Manual	Share Process
	c:\winnt\system32\svchost.exe	-k netsvcs	Normal	LocalSystem
Fax Service	Fax	Stopped	Manual	Own Process
	c:\winnt\system32\faxsvc.exe		Normal	LocalSystem
IIS Admin Service	IISADMIN	Running	Auto	Share Process
	c:\winnt\system32\inetsrv\inetinfo.exe		Normal	LocalSystem

Intersite Messaging	IsmServ	Stopped	Disabled	Own	
Process	c:\winnt\system32\ismserv.exe	Normal	LocalSystem	0	
Kerberos	Key Distribution Center	kdc	Stopped	Disabled	
		Share Process	c:\winnt\system32\lsass.exe	Normal	
Server	lanmanserver	Running	Auto	LocalSystem	0
		Share Process	c:\winnt\system32\services.exe	Normal	
Workstation	lanmanworkstation	Running	Auto	LocalSystem	0
		Share Process	c:\winnt\system32\services.exe	Normal	
License	Logging Service	LicenseService	Stopped	Manual	
		Own Process	c:\winnt\system32\llssrv.exe	Normal	
		LocalSystem	0		
TCP/IP	NetBIOS Helper Service	LmHosts	Running	Auto	
		Share Process	c:\winnt\system32\services.exe	Normal	
		LocalSystem	0		
Messenger	Messenger	Stopped	Manual	Share Process	
		c:\winnt\system32\services.exe	Normal	LocalSystem	0
NetMeeting	Remote Desktop Sharing	mnmmsrvc	Stopped	Manual	
		Own Process	c:\winnt\system32\mnmmsrvc.exe	Normal	
		LocalSystem	0		
Distributed Transaction Coordinator	MSDTC	Stopped	Manual	Own Process	
		c:\winnt\system32\msdtc.exe	Normal	LocalSystem	0
Windows	Installer	MSI Server	Stopped	Manual	
		Share Process	c:\winnt\system32\msiexec.exe	/v	
		Normal	LocalSystem	0	
Network DDE	NetDDE	Stopped	Manual	Share Process	
		c:\winnt\system32\netdde.exe	Normal	LocalSystem	0
Network DDE	DSDM	NetDDDdsdm	Stopped	Manual	
		Share Process	c:\winnt\system32\netdde.exe	Normal	
		LocalSystem	0		
Net Logon	Netlogon	Stopped	Manual	Share Process	
		c:\winnt\system32\lsass.exe	Normal	LocalSystem	0
Network Connections	Netman	Running	Manual	Share Process	
		c:\winnt\system32\svchost.exe	-k netsvcs	Normal	
		LocalSystem	0		
File Replication	NtFrs	Stopped	Manual	Own	
Process	c:\winnt\system32\ntfrs.exe	Ignore	LocalSystem	0	
NT LM Security Support Provider	NtLmssp	Stopped	Manual	Share Process	
		c:\winnt\system32\lsass.exe	Normal	LocalSystem	0
Removable Storage	NtmsSvc	Running	Auto	Share Process	
		c:\winnt\system32\services.exe	Normal	LocalSystem	0
		Share Process	c:\winnt\system32\spoolsv.exe	Normal	
		LocalSystem	0		
		Share Process	c:\winnt\system32\svchost.exe	-k netsvcs	
		Normal	LocalSystem	0	
Plug and Play	PlugPlay	Running	Auto	Share Process	
		c:\winnt\system32\services.exe	Normal	LocalSystem	0
IPSEC Policy Agent	PolicyAgent	Running	Auto	Share Process	
		c:\winnt\system32\lsass.exe	Normal	LocalSystem	0
Protected Storage	ProtectedStorage	Running	Auto	Share Process	
		c:\winnt\system32\services.exe	Normal	LocalSystem	0
Remote Access	Auto Connection Manager	RasAuto	Stopped	Manual	
		Share Process	c:\winnt\system32\svchost.exe	-k netsvcs	
		Normal	LocalSystem	0	
Remote Access Connection Manager	RasMan	Stopped	Manual	Share Process	
		c:\winnt\system32\svchost.exe	-k netsvcs	Normal	
		Normal	LocalSystem	0	
Routing and Remote Access	RemoteAccess	Stopped	Disabled	Share Process	
		c:\winnt\system32\svchost.exe	-k netsvcs	Normal	
		Normal	LocalSystem	0	
Remote Registry Service	RemoteRegistry	Stopped	Manual	Own Process	
		c:\winnt\system32\regsvc.exe	Normal	LocalSystem	0
Remote Command Service	RMSYS	Running	Auto	Own Process	
		c:\benchcraft\rsys.exe	Normal	LocalSystem	0
Remote Procedure Call (RPC) Locator	RpcLocator	Stopped	Manual	Own Process	
		c:\winnt\system32\locator.exe	Normal	LocalSystem	0
Remote Procedure Call (RPC)	RpcSs	Running	Auto	Share Process	
		c:\winnt\system32\svchost	-k rpcss	Normal	
		Normal	LocalSystem	0	
QoS RSVP	RSVP	Running	Manual	Own Process	
		c:\winnt\system32\rsvp.exe	-s	Normal	
		LocalSystem	0		
Security Accounts Manager	Sams	Running	Auto	Share Process	
		c:\winnt\system32\lsass.exe	Normal	LocalSystem	0
Smart Card Helper	SCardDrv	Stopped	Manual	Share Process	
		c:\winnt\system32\scardsvr.exe	Ignore	LocalSystem	0
Smart Card	SCardSrv	Stopped	Manual	Share Process	
		c:\winnt\system32\scardsvr.exe	Ignore	LocalSystem	0
Task Scheduler	Schedule	Running	Auto	Share Process	
		c:\winnt\system32\mstask.exe	Normal	LocalSystem	0
RunAs Service	seclogon	Running	Auto	Share Process	
		c:\winnt\system32\services.exe	Normal	LocalSystem	0
		Share Process	c:\winnt\system32\spoolsv.exe	Normal	
		LocalSystem	0		
		Share Process	c:\winnt\system32\svchost.exe	-k netsvcs	
		Normal	LocalSystem	0	
Print Spooler	Spooler	Stopped	Manual	Own	
Process	c:\winnt\system32\spoolsv.exe	Normal	LocalSystem	0	
HP ProLiant System Shutdown Service	sysdown	Running	Auto	Own Process	
		c:\winnt\system32\sysdown.exe	Normal	LocalSystem	0
Performance Logs and Alerts	SysmonLog	Stopped	Manual	Own Process	
		c:\winnt\system32\smlogsvc.exe	Normal	LocalSystem	0
Telephony	TapiSrv	Running	Manual	Share Process	
		c:\winnt\system32\svchost.exe	-k tapisrv	Normal	
Terminal Services	TermService	Running	Auto	Own Process	
		c:\winnt\system32\termsrv.exe	Normal	LocalSystem	0
Telnet	TlntSvr	Stopped	Manual	Own Process	
		c:\winnt\system32\tlntsvr.exe	Normal	LocalSystem	0
Distributed Link Tracking Server	TrkSvr	Stopped	Manual	Share Process	
		c:\winnt\system32\services.exe	Normal	LocalSystem	0
Distributed Link Tracking Client	TrkWks	Running	Auto	Share Process	
		c:\winnt\system32\services.exe	Normal	LocalSystem	0
Uninterruptible Power Supply	UPS	Stopped	Manual	Own Process	
		c:\winnt\system32\ups.exe	Normal	LocalSystem	0
Utility Manager	UtilMan	Stopped	Manual	Own	
Process	c:\winnt\system32\utilman.exe	Normal	LocalSystem	0	
Windows Time	W32Time	Stopped	Manual	Share Process	
		c:\winnt\system32\services.exe	Normal	LocalSystem	0
World Wide Web Publishing Service	W3SVC	Stopped	Auto	Share Process	
		c:\winnt\system32\inetsrv\inetinfo.exe	Normal	LocalSystem	0
Windows Management Instrumentation	WinMgmt	Running	Auto	Own Process	
		c:\winnt\system32\wbem\winmgmt.exe	Ignore	LocalSystem	0
Windows Management Instrumentation Driver Extensions	Wmi	Running	Manual	Share Process	
		c:\winnt\system32\services.exe	Normal	LocalSystem	0

[Program Groups]					
Group Name	Name	User Name			
Accessories	Default	User:Accessories			
Default User					
Accessories\Accessibility	Default				
User:Accessories\Accessibility		Default User			
Accessories\Entertainment	Default				
User:Accessories\Entertainment		Default User			
Accessories\System Tools	Default				
User:Accessories\System Tools	Default User				
Startup	Default User:Startup	Default User			
Accessories	All Users:Accessories	All Users			
Users					
Accessories\Communications	All				
Users:Accessories\Communications		All Users			
Accessories\Entertainment	All				
Users:Accessories\Entertainment		All Users			
Accessories\Microsoft Script Debugger	All				
Users:Accessories\Microsoft Script Debugger		All			
Users					
Accessories\System Tools	All				
Users:Accessories\System Tools		All Users			
Administrative Tools	All				
Users:Administrative Tools		All Users			
Compaq System Tools	All Users:Compaq System Tools	All Users			
Microsoft SQL Server	All Users:Microsoft SQL Server				
Server	All Users				
Startup	All Users:Startup	All Users			
Tardis	All Users:Tardis	All Users			
Accessories	CL73\Administrator:Accessories				
CL73\Administrator					
Accessories\Accessibility	CL73\Administrator:Accessories\Accessibilit				
y	CL73\Administrator				
Accessories\Entertainment	CL73\Administrator:Accessories\Entertainmen				
t	CL73\Administrator				
Accessories\System Tools	CL73\Administrator:Accessories\System Tools				
CL73\Administrator					
Administrative Tools	CL73\Administrator:Administrative Tools				
CL73\Administrator					
Compaq System Tools	CL73\Administrator:Compaq System Tools				
CL73\Administrator					
Startup	CL73\Administrator:Startup				
CL73\Administrator					
[Startup Programs]					
Program	Command	User Name	Location		
Tardis 2000	c:\progra-1\tardis-1.4\tardis.exe				
CL73\Administrator	Startup				
AClntUsr	c:\altiris\aclinet\aclntusr.exe		All		
Users					
HKLM\SOFTWARE\Microsoft\Windows\CurrentVers					
ion\Run					
[OLE Registration]					
Object	Local Server				
[Internet Explorer 5]					
[Following are sub-categories of this main category]					
[Summary]					
Item	Value				
Version	5.00.3315.1000				
Build	53315.1000				
Product ID	51876-270-9567332-05753				
Application Path	C:\Program Files\Internet Explorer				
Language	English (United States)				
Active Printer	Not Available				
Cipher Strength	168-bit				
Content Advisor	Disabled				
IEAK Install	No				
[File Versions]					
File	Version	Size	Date	Path	
advapi32.dll	5.0.2195.2867	352 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
advpack.dll	5.0.3103.1000	87 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
browselc.dll	5.0.3315.2846	35 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
browseui.dll	5.0.3315.2846	789 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
ckcnv.exe	5.0.2189.1	9 KB	12/7/1999		
	8:00:00 AM		C:\WINNT\system32		
	Microsoft				
comct132.dll	5.81.3103.1000	538 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
crypt32.dll	5.131.2195.283	451 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
enhsig.dll	<File Missing>	Not Available			
	Not Available				
Available					
iemigrat.dll	<File Missing>	Not Available			
	Not Available				
iesetup.dll	5.0.3103.1000	57 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
iexplore.exe	5.0.2920.0	59 KB			
	12/7/1999 8:00:00 AM		C:\Program		
	Files\Internet Explorer				
imagehlp.dll	5.0.2195.2778	126 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
imghelp.dll	<File Missing>	Not Available			
	Not Available				
inseng.dll	5.0.3103.1000	72 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
jobexec.dll	5.0.0.1	47 KB	12/7/1999		
	8:00:00 AM		C:\WINNT\system32		
	Microsoft				
jscript.dll	5.1.0.5907	476 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
jsproxy.dll	5.0.2920.0	13 KB			
	12/7/1999 8:00:00 AM		C:\WINNT\system32		
	Microsoft				
mshaahml.dll	<File Missing>	Not Available			
	Not Available				
mshtml.dll	5.0.3315.2870	2290 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
msjava.dll	5.0.3802.0	923 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
msos.dll	<File Missing>	Not Available			
	Not Available				
msxml.dll	8.0.5718.1	493 KB	5/4/2001		
	12:05:02 PM		C:\WINNT\system32		
	Microsoft				
occache.dll	5.0.3103.1000	86 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
ole32.dll	5.0.2195.2887	970 KB	5/4/2001		
	12:05:02 PM		C:\WINNT\system32		
	Microsoft				
oleaut32.dll	2.40.4517.0	612 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
olepro32.dll	5.0.4517.0	160 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
rsabase.dll	5.0.2195.2228	128 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
rsaenh.dll	5.0.2195.2228	131 KB			
	5/4/2001 12:05:02 PM				
	C:\WINNT\system32				
rsapi32.dll	<File Missing>	Not Available			
	Not Available				
Available					

```

rsasig.dll      <File Missing>      Not Available
    Not Available      Not Available      Not Available
schannel.dll     5.1.2195.0          138 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
shdoc401.dll     <File Missing>      Not Available
    Not Available      Not Available      Not Available
Available
shdocvw.dll     5.0.3315.2879     1078 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
shell132.dll     5.0.3315.2902     2304 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
shlwapi.dll      5.0.3315.1000     283 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
url.dll         5.0.2920.0          82 KB      12/7/1999
8:00:00 AM        C:\WINNT\system32 Microsoft
Corporation
urlmon.dll       5.0.3315.1000     441 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
vbscript.dll     5.1.0.5907        428 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
webcheck.dll     5.0.3315.1000     252 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
win.com          5.0.2134.1          24 KB      12/7/1999
8:00:00 AM        C:\WINNT\system32 Microsoft
Corporation
wininet.dll      5.0.3315.1000     457 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
winsock.dll       3.10.0.103        3 KB
    12/7/1999 8:00:00 AM
    C:\WINNT\system32 Microsoft Corporation
wintrust.dll     5.131.2195.2779   162 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
wsock.vxd <File Missing>      Not Available      Not Available
Available Not Available Not Available
wsock32.dll      5.0.2195.2871   21 KB
    5/4/2001 12:05:02 PM
    C:\WINNT\system32 Microsoft Corporation
wsock32n.dll     <File Missing>      Not Available
Not Available Not Available Not Available
[Connectivity]
Item      Value
Connection Preference      Never dial
EnableHttp1.1      1
ProxyHttp1.1      0
LAN Settings
AutoConfigProxy      wininet.dll
AutoProxyDetectMode Disabled
AutoConfigURL

```

```

Proxy      Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category
]

[Summary]

Item      Value
Page Refresh Type      Automatic
Temporary Internet Files Folder      C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space      34727 MB
Available Disk Space      32469 MB
Maximum Cache Size      542 MB
Available Cache Size      542 MB

[List of Objects]

Program File      Status      CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category
]

[Summary]

Item      Value
Content Advisor      Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
Administrator      Administrator      9/13/2002 to
8/20/2102 sha1RSA

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone      Security Level
Local intranet      Medium-low
Trusted sites      Low
Internet      Medium
Restricted sites      High

```

Microsoft SQL Server 2000 Installation Procedures

Microsoft SQL Server 2000 Installation Procedures
Type of installation: custom
During the custom installation, use the default settings for all except the following two areas:
Services accounts:
SQL Server - local system account
SQL Server Agent - local system account
Set the sort order/collation as SQL Collation binary
sort order/Latin_1_General

Microsoft COM Component Configuration Parameters

The component services tool in Windows 2000 Server was used to change the queue settings for the TPCC COM+ single queue component. The single queue component was set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The min and max pool size for the single queue component on the client was 134. Delivery threads were set under the TPCC key in the registry. The construction string was Dummy String

Appendix D:

60-Day Space

TPC-C 60 Day Space Requirements						
Warehouses	3,280				TpmC	39,006.54
Table	Rows	Data KB	Index KB	Extra 5% KB	8hr Space	Total Space KB
Warehouse	3280	352	40	20		412
District	32800	3648	40	184		3872
Customer	98400000	71563640	4595416	3,807,953		79967009
History	98400000	5466680	32		1,051,098	5466712
New_order	29520000	466720	1272	23,400		491392
Orders	98400000	3016096	1665904		5,455,118	4682000
Order_line	983995558	61499728	153160		13,064,769	61652888
Item	100000	9528	64	480		10072
Stock	328000000	104960000	235080	5,259,754		110454834
Total		246,986,392	6,651,008	9,091,790	19,570,985	262,729,190
MB						
Dynamic Space	68,342	Sum of Data for Order, Orderline and History				
Static Space	188,229	Sum of Data+Index+5%-Dynamic Space				
Free Space	na	Total Allocated Spac - (Dynamic + Static Space)				
Daily Growth	13,004	(Dynamic Space/(W*62.5))*tpmc				
Daily Spread	-	(Free Space -1.5*Dail Growth) Zero Assumed				
60 Day Space MB	968,462					
60 Day Space GB	945.76	GB				
Log Size	104,127.99	MB				
KB Per New Order	4.85	KB				
8 hr log MB	88,742	MB				
8 hr log GB	86.6625	GB				
Space Usage	GB Needed	Disks Measured	GB Priced	Disk Size	Formatted Size	
60 Day Space DB	945.76	168	2848.94	16.958	16.958	OK
			0.00			
			0.00			
Total DB			2848.94			
8-hr log + mirror	173.3250	6	203.46	36.435	33.91	OK
OS, Swap	3	1	33.91	36.435	33.91	
Total Storage	1,122.09	GB	3,086.31	GB		

MSSQL_misc_fg	MSSQL_cs_fg
412	
3872	79967009
6517810	
491392	
10137118	
74717657	
10072	110454834
91,878,332	190,421,843
files=	4
size=	3,043,200
Total=	6,278,400
8K blocks	12,172,800
	25,113,600
OK	OK

tpmC	39,006.54								
		Data Index	Data After KB	Index After KB	Data Grow KB	Index Grow KB	Total Grow KB	KB/New-Order	8-Hr Growth KB
History	5,466,688	32	5936264	80	469,576	48	469,624	0.0561	1,026.46
Order	3,016,120	1,665,952	3781216	3338168	765,096	1,672,216	2,437,312	0.2914	5,455,117.62
Order-Line	61,499,752	153,160	67,183,656	306512	5,683,904	153,352	5,837,256	0.6978	13,064,768.92
		sum(*) Before	sum(*) After		Num New-				8-Hr Growth MB
d.next_o_id	98,432,817	48,316,100	51,814,009		8,365,380				19,112.29
		Before MB	After MB		Grow MB		8-Hr Growth MB	KB/New-Order	8-Hr Growth GB
Log	127166		40921.22		39649.55		4.8535	88,742.43	86.66
		104127.99	1.22,2486		39.298958		4,969.9560	bytes	
		Database tpcc log used (%)							

Appendix E: Third Party Letters

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>



May 4, 2003

Hewlett-Packard
Company
James Barrett
MS150402
20555 SH 249
Houston, TX 77070

Mr. Barrett:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-00845	SQL Server 2000 Enterprise Edition <i>Per processor licensing</i> <i>Discount Schedule: Open Program Level B</i> <i>Unit Price reflects a 14% discount from the retail unit price of \$19,999.</i>	\$17,279	2	\$34,558
C11-00821	Windows 2000 Server <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 8% discount from the retail unit price of \$799.</i>	\$738	1	\$738
P72-00264	Windows Server 2003, Enterprise Server <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 40% discount from the retail unit price of \$3,999.</i>	\$2,399	1	\$2,399
254-00170	Visual C++ Standard <i>No discounts applied</i>	\$109	1	\$109
PRO-PRORS-16U-01	Database Server Support Package <i>1 Year Term</i>	\$1,950	3	\$5,850

Some products may not be currently orderable but will be available through Microsoft's normal distribution channels by April 2, 2003.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PCjaba0304050069

Please include this Reference ID in any correspondence regarding this price quote.

THE NUMBER ONE SOURCE
FOR COMPUTER PERIPHERALSPhone Orders
800.287.2323

ORDER TRACKING | RETURN REQUESTS | SHIPMENTS

Home | About Us | Product Return | Customer Service | Contact Us | Phone Orders

Products are in
stock and ready
to ship

Exclusive Offer! Creative Labs Nomad Jukebox 3 20GB...\$195
Exclusive Offer! Creative Labs Sound Blaster Audigy 2 Retail Box...\$199
HOT! Kodak EasyShare LS443 4.0 MegaPixel 3.3x Digital Camera...ONLINE \$149.99
SAVE\$\$ Toshiba E740 Pocket PC 64 MB WIRELESS...\$345

shop by
product | shop by
brand

SEARCH STORE

GO!

PRODUCTS

CDROMs

CDR/CDRW

CDR/W MEDIA

Camera Accessories

CASES

CLOSEOUTS

CONTROLLER CARDS

CPUs

DIGITAL CAMERAS

DVDs

FLASH CARDS

FLOPPY DRIVES

GPS

HANDHELD/PDA's

HARD DRIVES

HUBS

KEYBOARD/MOUSE

MEMORY

MICROSOFT

MODEMS

MONITORS

MOTHERBOARDS

MP3 PLAYERS

NETWORKING

NOTEBOOKS

OPERATING SYSTEMS

PALM ACCESSORIES

POWER SUPPLIES

PRINTERS

REMOVABLE DRIVES

ROUTERS

SCANNERS

SMART MEDIA

SOFTWARE

SOUND CARDS

SPEAKERS

COMPUTERS

NETGEAR**NETGEAR GS508TNA 8 PORT GIGABIT COPPER SWITCH 10/100/1000 MBPS**

- Price: \$502.00
- In Stock! Usually ships in 1-2 Business Days

Tell a friend

ADD TO CART

BUY NOW

FEATURES
 XP Home
OEM
\$81.00

 Teach
Read
Guar
\$6.95

 E
1250
Scan
811B
\$35.00

 T
MP3 I
Head
Adapt
Softw
COMF
\$72.10
More Info & Product Specification

- Includes switch, power cord, rack-mount kit, and manual;
- CONNECTOR(s): (8) 10BaseT/100BaseTX/1000BaseT/RJ45 ports;
- INDICATORS: Unit, power, Per network port, link, activity, full duplex/collision;
- PERFORMANCE: Switching fabric (9.6 gigabit per sec), Forward rate (100 Mbps port) 148,000 packet per sec, Forward rate (1000 Mbps port) 1,480,000 packet per sec, Latency (100 to 1000 Mbps) 8 usec max;
- MAC addresses: 8,000;
- Gigabit buffer memory: 8MB for 8 ports;
- APPROVALS: CE, FCC A, EN55022 A, VCCI A, UL, TUV;
- POWER: Autosensing internal 100 ~ 240V, 50/60Hz; Consumption 25 watts;
- SIZE: 13.0" w x 1.7" h x 8.2" d;
- Five Year Warranty!
- Pictures are for illustration purposes only.