

TPC Benchmark™ C

Full Disclosure Report for



**PRIMERGY K800**

**Using Microsoft SQL Server 7.0  
Enterprise Edition**

**and Microsoft Windows NT 4.0  
Enterprise Edition**

December 13, 1999

**First Edition**

First Edition December 13, 1999

Fujitsu Siemens believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. We assume no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, we provide no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark™ C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. We do not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (€/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

**Copyright © 1999 Fujitsu Siemens Computers GmbH 1999. All rights reserved.**

Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text on the title page of each item reproduced.

Primergy K800, Primergy 870 and Primergy 170 are trademarks of Fujitsu Siemens Computers GmbH.

Microsoft, Windows NT, SQL Server and Benchmark are registered trademarks of Microsoft Corporation.

Pentium® III XEON is a registered trademark of Intel.

TPC Benchmark™ is a trademark of the Transaction Processing Performance Council (TPC).

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

# Preface

The Transaction Processing Performance Council (TPC), of which Fujitsu Siemens Computers GmbH is a member, is an organization of computer companies, dedicated to the development of objective, industry-wide performance metrics in the area of transaction processing. Fujitsu Siemens Computers GmbH is involved in this effort, participating on the council and utilizing TPC benchmarks in performance evaluation.

The TPC Benchmark™ C Standard Specification was developed by the Transaction Processing Performance Council. This benchmark exercises the system components necessary to perform tasks associated with that class of on-line transaction processing (OLTP) environments emphasizing a mixture of read-only and update intensive transactions. This is a complex OLTP application environment exercising a breadth of system components associated by such environments characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

This benchmark defines four on-line transactions and one deferred transaction, intended to emulate functions that are common to many OLTP applications. However, this benchmark does not reflect the entire range of OLTP requirements. The extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subjected to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

# Summary

This report documents the TPC Benchmark™ C results achieved by the Fujitsu Siemens Computers GmbH using Microsoft SQL Server 7.0 Enterprise Edition.

The TPC Benchmark™ C tests were run on a Primergy K800 system using the Windows NT 4.0 Enterprise Edition operating system.

The results, summarized below, show the number of TPC Benchmark™ C transactions per minute (tpmC) and the price per tpmC (€/tpmC).

Software	Hardware	tpmC	€/tpmC
Microsoft SQL Server 7.0 Enterprise Edition, Windows NT 4.0 Enterprise Edition	Fujitsu Siemens Computers GmbH Primergy K800	40,696.25	16.78€

# Primergy K800 C/S with 5 Primergy 170

Report Date: December 13, 1999

Total System Cost

TPC-C Throughput

Price/Performance

Availability Date


**€ 682,917**

**40,696.25 tpmC**

**€16.78/tpmC**

January 1, 2000

Processors	Database Manager	Operating-System	Other Software	Number of Users
8 Intel Pentium® III Xeon 550 MHz	Microsoft SQL Server 7.0 Enterprise Edition	Microsoft Windows NT 4.0 Enterprise Edition	Windows 2000 Server, IIS 5.0 and COM+	<b>32,900</b>

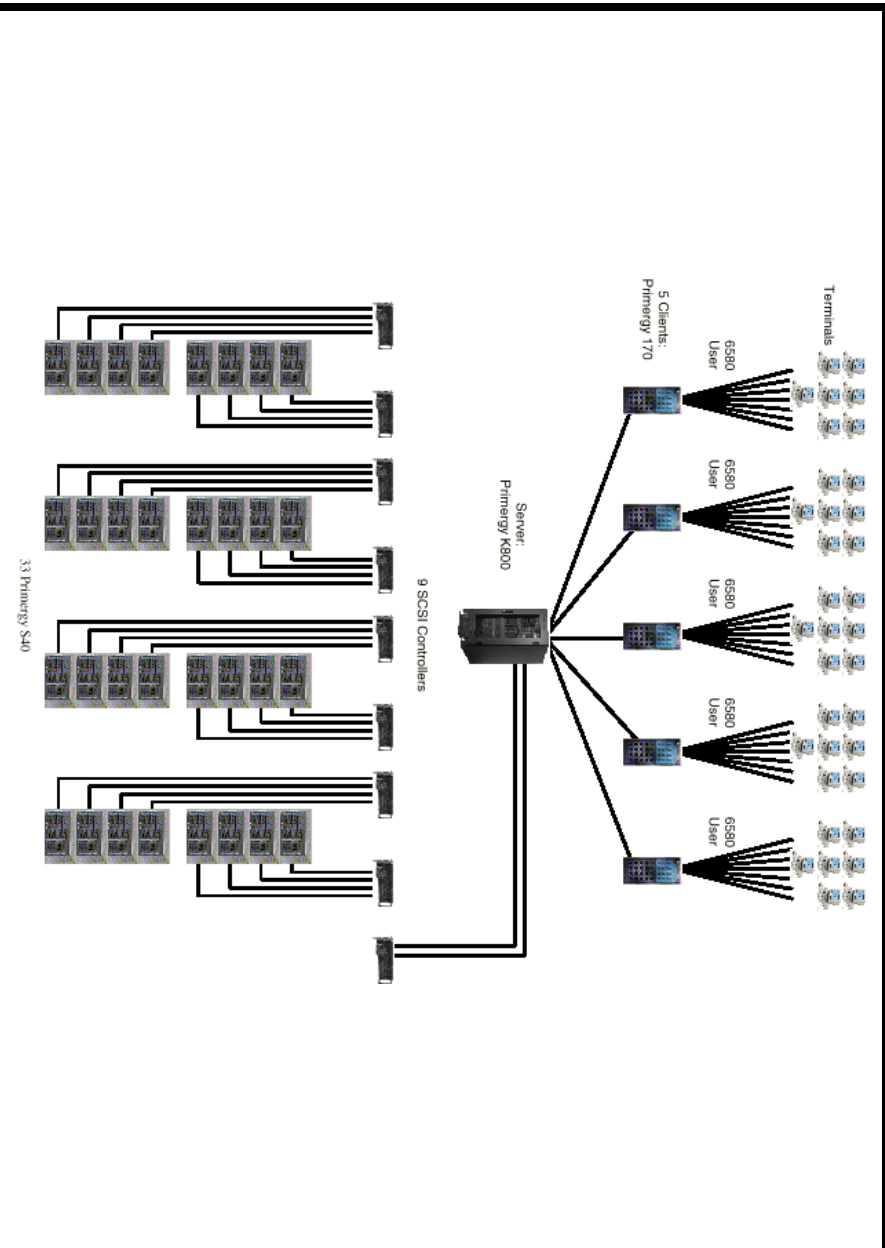

System Components	Qty/Srv.	1 Primergy K800	Qty/Client	5 Primergy 170
Processors	8	Intel Pentium® III Xeon 550 MHz 2 MB SLC	1	Intel Pentium® III 550 MHz 512 KB SLC
Memory	4	GB	256	MB
Disk Controller	9	SCSI Controllers	1	SCSI Controller
Disk Drives	385	9 GB	1	9 GB
	8	36 GB		
<b>Total GB of Storage</b>	<b>1</b>	<b>3535 GB</b>	<b>1</b>	<b>9 GB</b>



# Primergy K800

TPC-C REV.3.5  
EXECUTIVE SUMMARY

C/S with 5 Primergy 170

Report Date: December 13, 1999

Description	Part Number	Brand	Third Party	Pricing	Unit Price	Qty.	Extended Price	Svr Maint. Price
K800 Base (4x650MHz,1xEthernet,2GB RAM, LAN)								
Pentium III Xeon Processor 550MHz/2MB								
2. CPU Board Incl. CC board 4x SDRAM								
2. Memory Board								
Memory 256 MB SDRAM 100MHz								
Tape Div SLR50, 25GB								
9GB/10K LVD-SCSI, Hot Plug								
Power Supply Module 750W (add)								
Keyboard KBPC								
Country Pack								
Monitor MCM 15P1								
<b>Server Hardware Subtotal</b>								
							<b>92,085 Euro</b>	
<b>Server Hardware Subtotal</b>								
							<b>92,085 Euro</b>	

MegaRAID, 4ch w/64MB Mem + 10% spares								
36GB/10K LVD, Hot Plug (incl. 10% spare)								
APC USV 3000VA (incl. 10% spares)								
9GB/10K LVD-SCSI, Hot Plug (+10% spares)								
Primergy S40 BS 1 channel stack (+ 10% spares)								
SCSI Cable UHD-HD LVD 5m (+10% spares)								
<b>Storage Subtotal</b>								
							<b>359,255 Euro</b>	
<b>Maint. Server + Storage</b>								
SNP-SY-K549V129-A		AMI			3	2,140 Euro	11	23,540 Euro
S26381-K271-V320					1	2,071 Euro	10	20,708 Euro
SNP-SY-F1899E136-P					1	1,775 Euro	3	5,326 Euro
SNP-PS-E421E800-P					1	575 Euro	423	243,331 Euro
SNP-SY-F1899E109-P					1	1,718 Euro	36	61,841 Euro
SNP-SY-K538V611-P					1	125 Euro	36	4,511 Euro
<b>Client Hardware Subtotal</b>								
							<b>20,116 Euro</b>	
<b>Client Hardware Subtotal</b>								
							<b>20,116 Euro</b>	

Microsoft Windows NT-Server, Enterprise Edition 4.0, Incl 25 CALs		Microsoft			2	3,689 Euro	1	3,689 Euro
MS SQL-Server 7.0 Enterp Edition unlim. License		Microsoft			2	34,590 Euro	1	34,590 Euro
<b>Server Software Subtotal</b>								
							<b>38,279 Euro</b>	<b>10,200 Euro</b>

Microsoft Windows 2000 Server, Incl. 25 CALs		Microsoft			2	1,420 Euro	5	7,100 Euro
Microsoft Visual C++ Professional 6.0		Microsoft			2	469 Euro	1	469 Euro
<b>Client Software Subtotal</b>								
							<b>7,569 Euro</b>	

8xTP, 1x Coax 10Mbit Hub		D-Link			4	29 Euro	4543	131,747 Euro
8x10/0100Mbit Nway Switch		D-Link			4	205 Euro	3	615 Euro
<b>User Connectivity Subtotal</b>								
							<b>132,362 Euro</b>	
<b>Total</b>								
							<b>649,666 Euro</b>	<b>33,250 Euro</b>

<b>Five-Year Cost of Ownership</b>								
					tpmC	682,917 Euro		
1=Fujitsu Siemens, 2=Microsoft, 3=AMI, 4=D-Link					Euro/tpmC	40,696.25		
						16,78		

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing section of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at [pricing@tpc.org](mailto:pricing@tpc.org). Thank you.

Five-Year Cost of Ownership: €682,917  
tpmC Rating: 40,696.25  
€ / tpmC: 16,78

Note: The benchmark results and test methodology were audited by Bradley J. Askins of InfoSizing

## Numerical Quantities Summary

MQTh, computed Maximum Qualified Throughput		40,696.25 tpmC	
% throughput difference, reported & reproducibility runs 0.17 %			
Response Times (in seconds)	90th percentile	Average	Maximum
- New-Order	0.90	0.59	5.26
- Payment	0.75	0.45	4.08
- Order-Status	0.77	0.47	5.66
- Delivery (interactive portion)	0.18	0.13	1.15
- Delivery (deferred portion)	0.94	0.62	2.00
- Stock-Level	2.68	2.21	5.87
- Menu	0.18	0.14	1.22
Transaction Mix, in percent of total transactions			
- New-Order			44.79 %
- Payment			43.09 %
- Order-Status			4.04 %
- Delivery			4.06 %
- Stock-Level			4.02 %
Emulation Delay (in seconds)			
- New-Order	0.1	Response Time	
- Payment	0.1		Menu
- Order-Status	0.1		0.1
- Delivery (interactive)	0.1		0.1
- Stock-Level	0.1		0.1
Keying/Think Times (in seconds)			
- New-Order	Minimum	Average	Maximum
	18.00/0.00	18.01/12.05	18.10/120.51
- Payment	3.00/0.00	3.01/12.03	3.08/120.52
- Order-Status	2.00/0.00	2.01/10.14	2.08/100.49
- Delivery (interactive)	2.00/0.00	2.01/ 5.03	2.08/ 50.50
- Stock-Level	2.00/0.00	2.01/ 5.06	2.06/ 50.50
Test Duration and Checkpointing			
- Ramp-up time		46 minutes	
- Measurement interval		20 minutes	
- Number of checkpoints		1	
- Checkpoint interval		20 minutes	
- Transactions during measurement interval (all types)		1,891,025	





# Contents

<b>PREFACE</b> .....	<b>3</b>
<b>SUMMARY</b> .....	<b>4</b>
<b>NUMERICAL QUANTITIES SUMMARY</b> .....	<b>7</b>
<b>CONTENTS</b> .....	<b>9</b>
<b>INTRODUCTION</b> .....	<b>11</b>
<i>System Overview</i> .....	11
<i>Full Disclosure</i> .....	11
<i>Report Format</i> .....	11
<i>Additional Copies</i> .....	12
<b>1. GENERAL ITEMS</b> .....	<b>13</b>
1.1 <i>Application Code</i> .....	13
1.2 <i>Benchmark Sponsor</i> .....	13
1.3 <i>Parameter Settings</i> .....	13
1.4 <i>Configuration Diagrams</i> .....	14
<i>SUT Configuration</i> .....	14
<i>Client Configuration</i> .....	14
<b>2. CLAUSE 1 RELATED ITEMS - LOGICAL DATABASE DESIGN</b> .....	<b>17</b>
2.1 <i>Table Definitions</i> .....	17
2.2 <i>Physical Organization of Database</i> .....	17
2.3 <i>Insert and Delete Operations</i> .....	18
2.4 <i>Database Partitioning</i> .....	18
2.5 <i>Replication of Tables</i> .....	18
2.6 <i>Additional and/or Duplicated Attributes</i> .....	18
<b>3. CLAUSE 2 RELATED ITEMS - TRANSACTION AND TERMINAL PROFILES</b> .....	<b>19</b>
3.1 <i>Random Number Generator</i> .....	19
3.2 <i>Input/Output Screen Layout</i> .....	19
3.3 <i>Configured Terminal Features</i> .....	19
3.4 <i>Presentation Managers or Intelligent Terminals</i> .....	19
3.5 <i>Transaction Statistics</i> .....	20
3.6 <i>Queuing Mechanism</i> .....	20
<b>4. CLAUSE 3 RELATED ITEMS - TRANSACTION AND SYSTEM PROPERTIES</b> .....	<b>21</b>
4.1 <i>Atomicity</i> .....	21
4.2 <i>Consistency</i> .....	22
4.3 <i>Isolation</i> .....	22
4.4 <i>Durability</i> .....	23
<b>5. CLAUSE 4 RELATED ITEMS - SCALING AND DATABASE POPULATION</b> .....	<b>25</b>
5.1 <i>Initial Cardinality of Tables</i> .....	25
5.2 <i>Distribution of Tables and Log</i> .....	26
5.3 <i>Database Model, Interface, and Access Language</i> .....	26
5.4 <i>Database Partitions/Replications Mapping</i> .....	27
5.5 <i>180 day space Calculation</i> .....	27

<b>6.</b>	<b>CLAUSE 5 RELATED ITEMS - PERFORMANCE METRICS AND RESPONSE TIME.....</b>	<b>29</b>
6.1	<i>Measured tpmC.....</i>	29
6.2	<i>Response Times.....</i>	29
6.3	<i>Keying and Think Times.....</i>	29
6.4	<i>Graphs.....</i>	30
6.5	<i>Steady State Determination.....</i>	33
6.6	<i>Work Performed.....</i>	34
6.7	<i>Reproducibility.....</i>	35
6.8	<i>Duration of Measurement.....</i>	35
6.9	<i>Regulation of Transaction Mix.....</i>	35
6.10	<i>Transaction Mix.....</i>	35
6.11	<i>Transaction Statistics.....</i>	36
6.12	<i>Checkpoint Statistics.....</i>	36
<b>7.</b>	<b>CLAUSE 6 RELATED ITEMS - SUT, DRIVER, AND COMMUNICATION DEFINITION.....</b>	<b>37</b>
7.1	<i>RTE Inputs.....</i>	37
7.2	<i>Functionality and Performance of Emulated Components.....</i>	37
7.3	<i>Functional Diagrams of the Benchmarked and Proposed Configuration.....</i>	37
7.4	<i>Network Configurations of the Tested and Proposed Services.....</i>	37
7.5	<i>Network Bandwidth.....</i>	38
7.6	<i>Operator Intervention.....</i>	38
<b>8.</b>	<b>CLAUSE 7 RELATED ITEMS - PRICING.....</b>	<b>39</b>
8.1	<i>System Pricing.....</i>	39
8.2	<i>Availability Dates.....</i>	39
8.3	<i>Throughput and Price/Performance.....</i>	39
8.4	<i>Country Specific Pricing.....</i>	39
8.5	<i>Usage Pricing.....</i>	40
<b>9.</b>	<b>CLAUSE 8 RELATED ITEMS - AUDIT.....</b>	<b>41</b>
	<b>APPENDIX A - APPLICATION SOURCE CODE.....</b>	<b>43</b>
	<b>APPENDIX B - DATABASE DETAILS.....</b>	<b>130</b>
	<b>APPENDIX C - TUNABLE PARAMETERS AND OPTIONS.....</b>	<b>187</b>
	<b>APPENDIX D - PRICING DETAILS.....</b>	<b>337</b>
	<i>180 Day Space Calculation.....</i>	337
	<i>Price/Performance Spreadsheet.....</i>	338
	<b>APPENDIX E - PRICE QUOTATIONS.....</b>	<b>339</b>
	<b>APPENDIX F - ATTESTATION LETTER.....</b>	<b>343</b>

# Introduction

This is the Full Disclosure Report for the TPC Benchmark™ C running on the Fujitsu Siemens Computers system Primergy K800. It meets the requirements of the TPC Benchmark™ C Standard Revision 3..

## System Overview

*This report documents the compliance of the Fujitsu Siemens Computers GmbH TPC Benchmark™ C tests using Microsoft SQL Server 7.0 Enterprise Edition Relational Database Management System.*

The TPC Benchmark™ C tests were carried out on a Primergy K800. The Primergy K800 is a powerful Windows NT Enterprise Server with a motherboard based on the Intel Profusion chipset holds up to 8 Intel Pentium® III Xeon 550 MHz processors with 2 MB L2 cache. The system was equipped with 4 GB of ECC SDRAM memory. 9 of the 10 hot-pluggable 64-bit-PCI-Slots (4 with 66 MHz and 6 with 33 MHz) were used for AMI MegaRAID Enterprise 1500-H RAID controllers. 1 was used for an Intel Pro100+ Ethernet adapter. The client machines were 5 Primergy 170, each with 1 Intel Pentium® III 550 MHz, 256 MB ECC SDRAM memory and 4 Adaptec ANA 62022 dual-port ethernet adapters.

The server operating system was Windows NT 4.0 Enterprise Edition SP5, the client operating system Windows 2000 Server.

## Full Disclosure

*From Clause 8.1 of the TPC Benchmark™ C Standard Specification:*

The intent of this disclosure is for a customer to be able to replicate the results of this benchmark given the appropriate documentation and products.

Fujitsu Siemens Computers believes that this full disclosure report meets the stated intention. Fujitsu Siemens Computers has strived to maintain the integrity of the Specification by adhering not only to the letter of the Specification, but also to its spirit.

## Report Format

*The format of this document follows Clause 8 of the TPC Benchmark™ C specification (TPC Benchmark™ C Standard Specification, Revision 3., Transaction Processing Performance Council) which describes the full disclosure report requirements for the test.*

Each section of this report begins with the specification requirement printed in *italic type*. It is followed by plain type text that explains how the test complies with the requirement. Sections which require extensive listings reference appropriate appendices.

Report organization:

- General Items
- Clause 1 Related Items - Logical Database Design
- Clause 2 Related Items - Transaction and Terminal Profiles
- Clause 3 Related Items - Transaction and System Properties
- Clause 4 Related Items - Scaling and Database Population
- Clause 5 Related Items - Performance Metrics and Response Time
- Clause 6 Related Items - SUT, Driver, and Communication Definition
- Clause 7 Related Items - Pricing
- Clause 8 Related Items - Audit
- Appendix A - Application Source Code
- Appendix B - Database Details
- Appendix C - Tunable Parameters and Options
- Appendix D - Pricing Details
- Appendix E - Price Quotations
- Appendix F - Attestation Letter

## **Additional Copies**

*Additional copies of this report are available upon request from Fujitsu Siemens Computers GmbH:*

*Fujitsu SiemensComputers SHV Server DS 5  
Entry Server Performance Lab  
Mr. Bathe  
Heinz-Nixdorf-Ring 1  
33106 Paderborn  
Germany*

# 1. General Items

**1.1 Application Code**  
*The application program (as defined in Clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input and output functions. [Clause 8.1.1.4]*

The source code of the application program is provided in Appendix A - Application Source Code.

**1.2 Benchmark Sponsor**  
*A statement identifying the benchmark sponsor(s) and other participating companies must be provided. [Clause 8.1.1.5]*

This benchmark was sponsored and executed by Fujitsu Siemens Computers GmbH.  
The benchmark was developed and engineered by Fujitsu Siemens Computers GmbH and Microsoft Corporation. Testing took place at Fujitsu Siemens Computers NT-benchmark laboratories in Paderborn, Germany.

<b>1.3 Parameter Settings</b>	<p><i>Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including but not limited to:</i></p> <ul style="list-style-type: none"><li>• <i>Database tuning options.</i></li><li>• <i>Recovery/commit options.</i></li><li>• <i>Consistency/locking options.</i></li><li>• <i>Operating system and application configuration parameters.</i></li></ul> <p><i>[Clause 8.1.1.6]</i></p>
-------------------------------	--

The significant parameters and system configuration files are provided in Appendix C - Tunable Parameters and Options.

## 1.4 Configuration Diagrams

*Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:*

- *Number and type of processors.*
- *Size of allocated memory, and any specific mapping/partitioning of memory unique to the test.*
- *Number and type of disk units (and controllers, if applicable).*
- *Number of channels or bus connections to disk units, including their protocol type.*
- *Number of LAN (e.g., Ethernet) connections, including routers, workstations, terminals, etc., that were physically used in the test or are incorporated into the pricing structure (see Clause 8.1.8).*
- *Type and the run-time execution location of software components (e.g., DBMS, client processes, transaction monitors, software drivers, etc.).*

*[Clause 8.1.1.7]*

### SUT Configuration

The Primergy K800 server system included:

8	Intel Pentium® III Xeon 550 MHz with 2 MB Second Level Cache
4	GB memory
9	SCSI controllers
385	disks 9 GB
8	disks 36 GB
1	LAN

### Client Configuration

The Primergy 170 client systems included:

1	Intel Pentium® III 550 MHz with 512 KB Second Level Cache
256	MB memory
1	SCSI controller
1	disk 4 GB
4	dual port LAN

The benchmarked and priced system configurations are shown in Figure 1 and Figure 2 in accordance with Clause 8.1.1.7.

**FIGURE 1: BENCHMARK SYSTEM CONFIGURATION PRIMERGY K800**


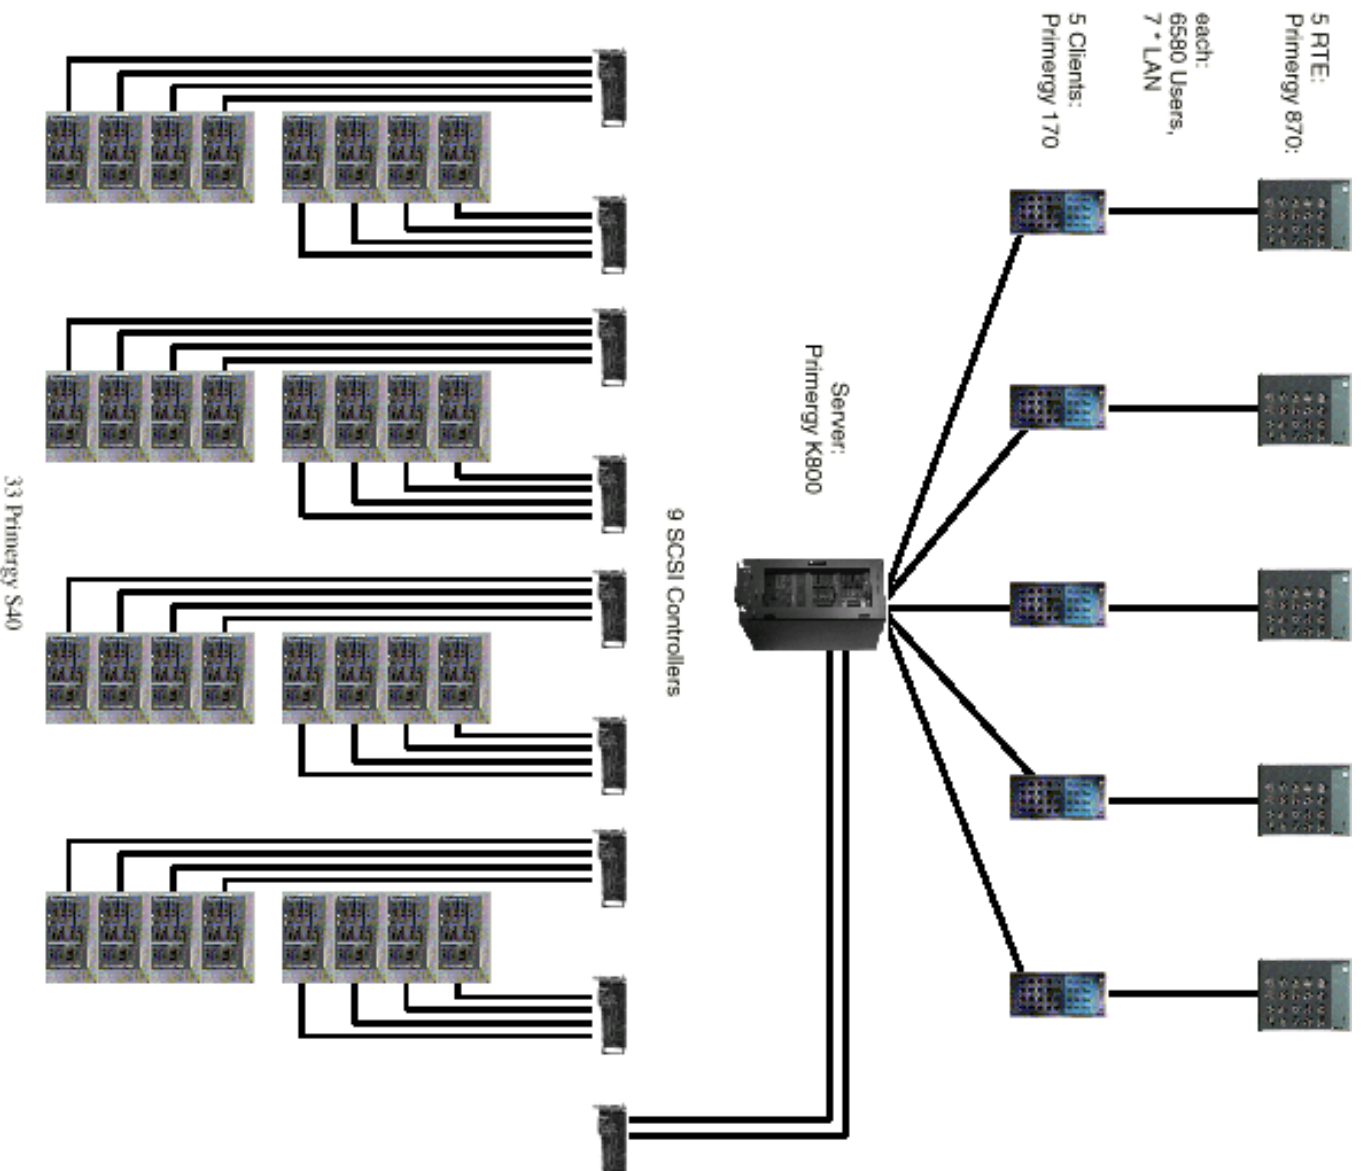


FIGURE 2: PRICED SYSTEM CONFIGURATION PRIMERGY K800



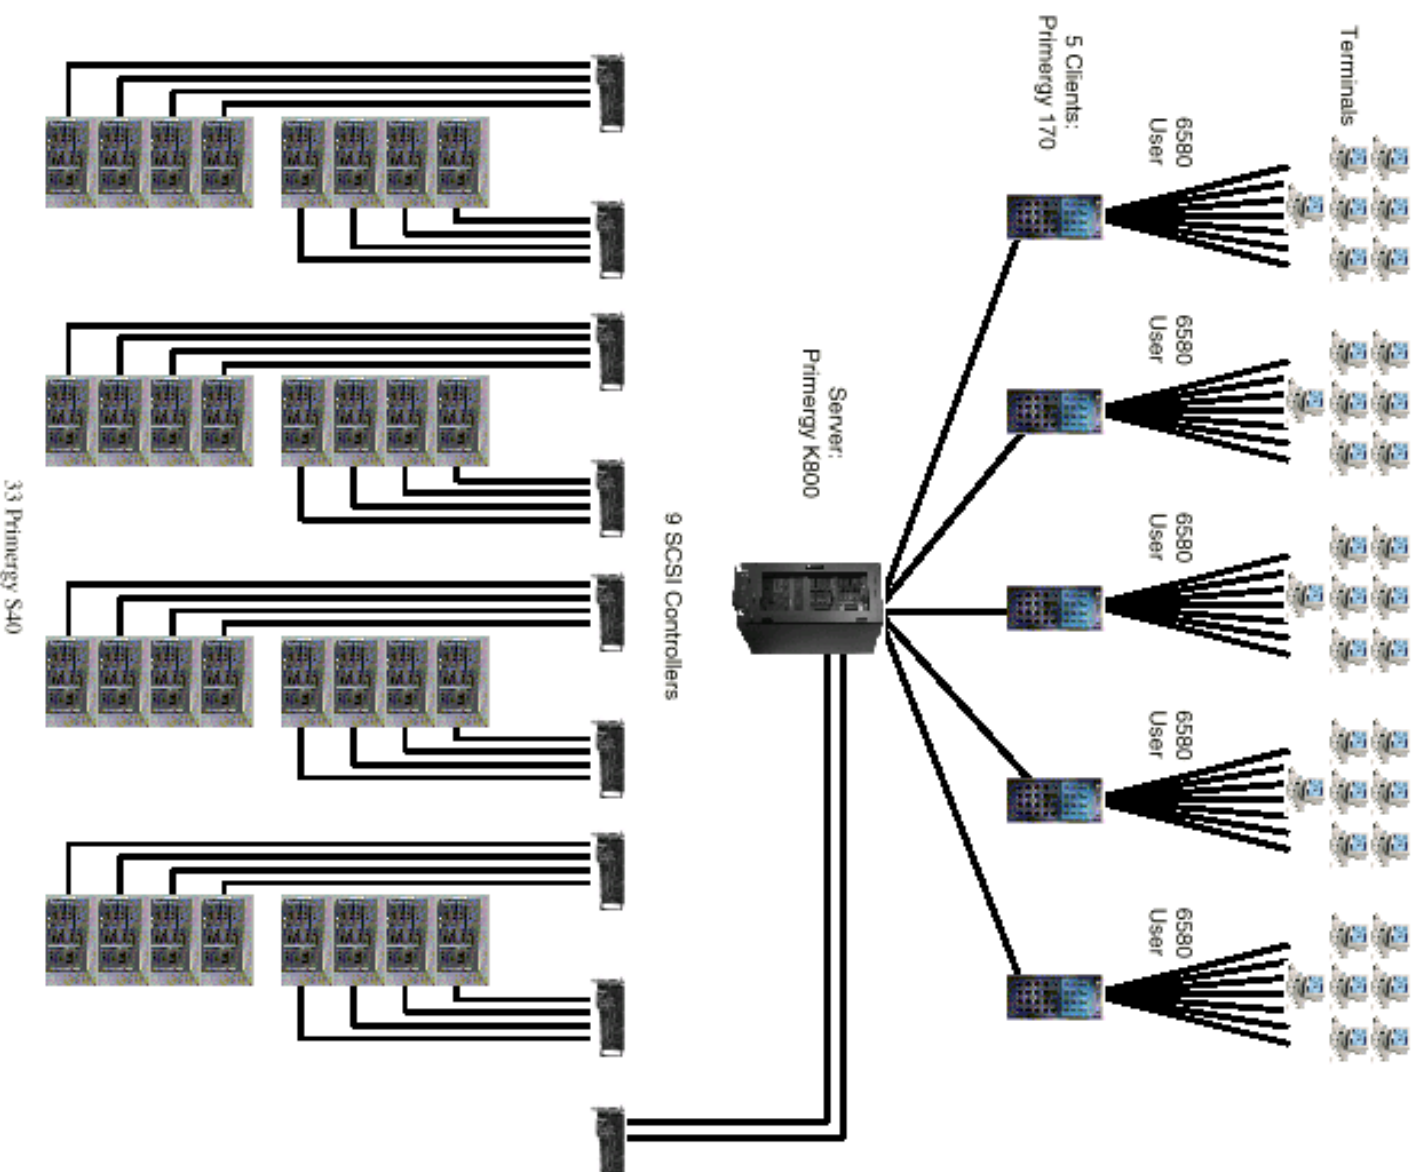

## 2. Clause 1 Related Items - Logical Database Design

**2.1 Table Definitions**  
*Listings must be provided for all table definition statements and all other statements used to set-up the database. [Clause 8.1.2.1]*

The programs that defined, created, and populated the Microsoft SQL Server 7.0 Enterprise Edition database for this TPC benchmark™ C are listed in Appendix B - Database Details.

**2.2 Physical Organization of Database**  
*The physical organization of tables and indices, within the database, must be disclosed. [Clause 8.1.2.2]*

**FIGURE 3: PHYSICAL ORGANIZATION OF THE DATABASE**

Disk #	Controller	Disktype	RAID Configuration	Drive Letter	Size MB	Filegroup or Filesystem
0,1	Symbios (onboard)	9 GB	-	WINNT40EE C: SQL D:	1000 8000	NTFS NTFS
2	MegaRAID Enterprise 1500-H #1	48 x 9 GB	RAID0	E: N: X:	24000 14000 200000	cs1 misc1 BACKUP 1
3	MegaRAID Enterprise 1500-H #2	48 x 9 GB	RAID0	F: O:	24000 14000	cs2 misc2
4	MegaRAID Enterprise 1500-H #3	48 x 9 GB	RAID0	G: P: Y:	24000 14000 200000	cs3 misc3 BACKUP 2
5	MegaRAID Enterprise 1500-H #4	48 x 9 GB	RAID0	H: Q:	24000 14000	cs4 misc4
6	MegaRAID Enterprise 1500-H #5	8 x 36 GB	RAID1	L:	50000	log
7	MegaRAID Enterprise 1500-H #6	48 x 9 GB	RAID0	I: R:	24000 14000	cs5 misc5
8	MegaRAID Enterprise 1500-H #7	48 x 9 GB	RAID0	J: S:	24000 14000	cs6 misc6
9	MegaRAID Enterprise 1500-H #8	48 x 9 GB	RAID0	K: T:	24000 14000	cs7 misc7
10	MegaRAID Enterprise 1500-H #9	48 x 9 GB	RAID0	M: U:	24000 14000	cs8 misc8

All controllers were configured with write cache disabled. Write cache was enabled on the log drives and disabled on the data drives.

Space was allocated to Microsoft SQL Server 7.0 Enterprise Edition on SUT disks according to the data in section 5.2. The size of the datafile on each disk drive was calculated to provide even distribution on load across the disk drives. The NT Disk Administrator was used to create raw devices for data/log and NTFS partitions for dump devices. For further information see Appendix B (Disk Usage) and Figure 4 in 5.2 (Distribution of Tables and Log). No attempt was made to alter the default physical organization of the database tables and indices chosen by Microsoft SQL Server 7.0 Enterprise Edition.

## **2.3 Insert and Delete Operations**

*It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restriction in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the maximum key value for these new rows. [Clause 8.1.2.3]*

There were no restrictions on insert and delete operations to any tables.

## **2.4 Database Partitioning**

*While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC benchmark™ C (see Clause 1.6), any such partitioning must be disclosed. [Clause 8.1.2.4]*

There was no partitioning used in this implementation.

## **2.5 Replication of Tables**

*Replication of tables, if used, must be disclosed (see Clause 1.4.6). [Clause 8.1.2.5]*

Replication of tables was not used in this implementation.

## **2.6 Additional and/or Duplicated Attributes**

*Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance (see Clause 1.4.7). [Clause 8.1.2.6]*

No additional and/or duplicated attributes were used.

## 3. Clause 2 Related Items - Transaction and Terminal Profiles

### 3.1 Random Number Generator

*The method of verification for the random number generation must be described. [Clause 8.1.3.1]*

The random number generation was done in Microsoft BenchCraft, which was audited independently.

### 3.2 Input/Output Screen Layout

*The actual layouts of the terminal input/output screens must be disclosed. [Clause 8.1.3.2]*

The screen layout corresponded exactly to those of the TPC-C Standard Specification (specified in Clause 2.4.3, 2.5.3, 2.6.3, 2.7.3, and 2.8.3).

### 3.3 Configured Terminal Features

*The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance). [Clause 8.1.3.3]*

All of the requirements in clause 2.2.2.4. are supported. This was verified by manually exercising each specification on a Primergy 870-40.

### 3.4 Presentation Managers or Intelligent Terminals

*Any usage of presentation managers or intelligent terminals must be explained. [Clause 8.1.3.4]*

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms application is listed in Appendix A - Application Source Code.

### 3.5 Transaction Statistics

*The numerical quantities which are required are listed in the following table.  
[Clause 8.1.3.5 to 8.1.3.11]*

	<b>Statistics</b>	<b>Percentage</b>
New-Order	Home order-lines	98.99%
	Remote order-lines	1.01%
	Rolled back transactions	1.01%
Payment	Average items per order	10.00
	Home transactions	84.95%
	Remote transactions	15.05%
	Non-primary key access	59.95%
	Non-primary key access	60.24
Order-Status	Skipped transactions	0
Transaction Mix	New-Order	44.79 %
	Payment	43.09 %
	Order-Status	4.04 %
	Delivery	4.06 %
	Stock-Level	4.02 %

### 3.6 Queuing Mechanism

*The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed. [Clause 8.1.12]*

Deferred deliveries are queued by making an entry in an array within the client application process (tpcc.dll). The queued delivery transactions are processed and logged asynchronously by background threads within the application. The source code is listed in Appendix A - Application Source Code.

## 4. Clause 3 Related Items - Transaction and System Properties

### ACID Tests

*The results of the ACID tests must disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7. [Clause 8.1.4.1]*

All ACID tests were performed successfully. The following sections describe the requirements of each of the tests as described in Clause 3 and the approach used to satisfy them.

All ACID tests were performed on the Primergy K800 system using the fully scaled database, except for the test of durable media failure.

The durability test was performed on a database scaled to 15 warehouses. This test would also pass on a fully scaled database.

### 4.1 Atomicity

*The system under test must guarantee that database transactions are atomic; the system will either perform all individual operations on the data, or will assure that no partially-completed operations leave any effects on the data. [Clause 3.2.1]*

### Commit Transaction

Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number as specified in Clause 2.5.1.2) and verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have been changed appropriately. [Clause 3.2.2.1]

The following steps demonstrated atomicity for completed (COMMIT) transactions:

- A row was randomly selected from the warehouse, district and customer table.
- the current balance was noted.
- A payment transaction was executed with the above identifiers and a known amount.
- The transaction was committed.
- It was verified, that the rows contain the correct updated balances.

## Rollback Transaction

Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number as specified in Clause 2.5.1.2) and substitute a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have NOT been changed. [Clause 3.2.2.2]

The following steps demonstrated atomicity for aborted (ROLLBACK) transactions:

- A row was randomly selected from the warehouse, district and customer table.
- the current balance was noted.
- A payment transaction was executed with the above identifiers and a known amount.
- The transaction was rolled back.
- It was verified, that the rows contain the original balances.

## 4.2 Consistency

*Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state. [Clause 3.3.1]*

Consistency conditions 1 - 4 were tested by issuing queries to the database. The results of the queries verified that the database was consistent for all these tests. The tests were performed before and after the performance run on the same database that was used for the benchmark.

## 4.3 Isolation

*Operations of concurrent transactions must yield results which are indistinguishable from the results which would be obtained by forcing each transaction to be serially executed to completion in some order.*

We ran all of the seven isolation tests as described in clause 3.4.2.1 to 3.4.2.7 and additionally the two phantom protection tests. The tests were executed using shell scripts to issue queries to the database. The results of the queries verified that the required isolation had been met.

## 4.4 Durability

*The tested system must guarantee durability: the ability to preserve the effects of committed transactions and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3. [Clause 3.5]*

*List of single failures:*

- 1 *Permanent irrecoverable failure of any single durable medium containing TPC-C database tables or recovery log data.*
- 2 *Instantaneous interruption (system crash / system hang) in processing which requires system reboot to recover.*
- 3 *Failure of all or part of memory (loss of contents).*

*[Clause 3.5.3]*

*The intent of these tests is to demonstrate that all transactions whose output messages have been received at the terminal or RTE have in fact been committed in spite of any single failure from the list in Clause 3.5.3 and that all consistency conditions are still met after the database is recovered.*

*It is required that the system crash test(s) and the loss of memory test(s) described in Clause 3.5.3.2 and 3.5.3.3 be performed under full terminal load and a fully scaled database. The durable media failure test(s) described in Clause 3.5.3.1 may be performed on a subset of the SUT configuration and database. For the SUT subset, all multiple hardware components, such as processors and disk / controllers in the full SUT configuration, must be represented by the greater of 10% of the configuration or two of each of the multiple hardware components. The database must be scaled to at least 10% of the fully scaled database, with a minimum of two warehouses. ... Furthermore, the standard driving mechanism must be used in this test. The test sponsor must state that to the best of their knowledge, a fully scaled test would also pass all durability tests. [Clause 3.5.4]*

The failure of all or part of memory test and the system crash test were combined with the loss of log disk and performed under full load and by using a fully scaled database.

The full hardware configuration of the SUT (in accordance with Clause 3.5.4) and the same test procedure was used during all durability tests, except the test for loss of data.

- The current count of the total number of orders was determined by summing up the D\_NEXT\_O\_ID fields of all rows in the DISTRICT table before the test.
- 6 min after starting the measurement we pulled off one of the log disks. As we use hardware-mirrored diskpairs with the SCSI-controller, execution continued.
- After additional 6 min we powered of the server to emulate the loss of memory. After server system reboot, SQL-Server starts with recovering the database tpcc. After completion, we computed the sum of D\_NEXT\_O\_ID from district. Client and RTE systems were interrupted and evaluation started on the RTE. The difference of all D\_NEXT\_O\_ID between RTE an server was in the permitted scope.

The durable media failure test for loss of data disk was performed with 48 of the 384 data disks and a database scaled to 15 warehouses under the load of 150 users. We used one RTE and one client system. To the best of the test sponsor's

knowledge, a fully loaded and fully scaled database would also pass this durability test.

- The database was backed up.
- The current count of the total number of orders was determined by summing up the D\_NEXT\_O\_ID fields of all rows in the DISTRICT table before the test.
- 5 min after starting the measurement, we pulled of one of the data disks.
- SQL-Server recognized the loss of a device. We dumped the transaction log and removed the database with dropdevice. Then we shut down SQL-Server and the system.
- We replaced the disk and made it online.
- We restarted SQL-Server, no tpc database and none of its devices were present. We recreated the database, loaded dump and load transaction log
- After completion, we computed the sum of D\_NEXT\_O\_ID from district.
- Client and RTE systems were interrupted and evaluation started on the RTE. The difference of all D\_NEXT\_O\_ID between RTE an server was in the permitted scope.



## 5. Clause 4 Related Items - Scaling and Database Population

### 5.1 Initial Cardinality of Tables

*The cardinality (e.g., the number of rows) of each table, as it existed at the start of the benchmark run (see Clause 4.2), must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted (see Clause 4.2.2), the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed. [Clause 8.1.5.]*

The database for the Primergy K800 system was scaled for 3290 warehouses. In accordance with Clause 4.2, the following number of records were loaded in the specified tables:

Table	Number of Records
Warehouse	3290
District	32,900
Customer	98,700,000
History	98,700,000
Order	98,700,000
New-Order	29,610,000
Order-Line	986,992,980
Stock	329,000,000
Item	100,000
Deleted Warehouses	0

The following constant values were used during the database build and benchmark test for the NURand function:

Constant C	Value
C_LAST (build)	123
C_LAST (run)	233

**5.2** *The distribution of tables and logs across all media must be explicitly depicted for the tested and priced systems. [Clause 8.1.5.2]*

**Distribution of Tables and Log**

**FIGURE 4: LOGICAL ORGANIZATION OF THE DATABASE**

	<b>device</b>	<b>raw size</b>	<b>use</b>
C:	MSSQL70_tpcc_root	10 MB	root
L:	MSSQL70_tpcc_log	50,000 MB	Log
E:	MSSQL70_cs1	23,500 MB	Stock, Customer
F:	MSSQL70_cs2	23,500 MB	Stock, Customer
G:	MSSQL70_cs3	23,500 MB	Stock, Customer
H:	MSSQL70_cs4	23,500 MB	Stock, Customer
I:	MSSQL70_cs5	23,500 MB	Stock, Customer
J:	MSSQL70_cs6	23,500 MB	Stock, Customer
K:	MSSQL70_cs7	23,500 MB	Stock, Customer
M:	MSSQL70_cs8	23,500 MB	Stock, Customer
N:	MSSQL70_misc1	13,500 MB	Warehouse, District, Item, New Order, History, Order, Orderline
O:	MSSQL70_misc2	13,500 MB	Warehouse, District, Item, New Order, History, Order, Orderline
P:	MSSQL70_misc3	13,500 MB	Warehouse, District, Item, New Order, History, Order, Orderline
Q:	MSSQL70_misc4	13,500 MB	Warehouse, District, Item, New Order, History, Order, Orderline
R:	MSSQL70_misc5	13,500 MB	Warehouse, District, Item, New Order, History, Order, Orderline
S:	MSSQL70_misc6	13,500 MB	Warehouse, District, Item, New Order, History, Order, Orderline
T:	MSSQL70_misc7	13,500 MB	Warehouse, District, Item, New Order, History, Order, Orderline
U:	MSSQL70_misc8	13,500 MB	Warehouse, District, Item, New Order, History, Order, Orderline

**5.3** *A statement must be provided that describes:*

**Database Model, Interface, and Access Language** 1. *The data model implemented by the DBMS used (e.g., relational, network, hierarchical)*

2. *The database interface (e.g., embedded, call level) and access language (e.g., SQL, DL/1, COBOL read/write) used to implement the TPC-C transactions. If more than one interface/access language is used to implement TPC-C, each interface /access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

*[Clause 8.1.5.3]*

Microsoft SQL Server 7.0 Enterprise Edition is a Relational DataBase Management System. The interface used was Microsoft SQL Server 7.0 Enterprise Edition stored procedures accessed with Remote Procedure Calls embedded in C code.

#### **5.4 Database Partitions/Replications Mapping**

*The mapping of database partitions/replications must be explicitly described.  
[Clause 8.1.5.4]*

There was no partitioning and/or replication used in this implementation.

#### **5.5 180 day space Calculation**

*Details of the 180-day space computations along with proof that the database is configured to subtain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed (see Clause 4.2.3). [Clause 8.1.5.5]*

Calculations of space requirements in the priced configurations for the 180-day period are provided in Appendix D - Pricing Details.



## 6. Clause 5 Related Items - Performance Metrics and Response Time

### 6.1 Measured tpmC

*Measured tpmC must be reported. [Clause 8.1.6.1]*

During the 20 minutes measurement period on the Primergy K800 the throughput measured was 40,696.25 tpmC.

### 6.2 Response Times

*Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the Menu response time. [Clause 8.1.6.2]*

Type	Average	Maximum	90 Percentile
New-Order	0.59	5.26	0.90
Payment	0.45	4.08	0.75
Order-Status	0.47	5.66	0.77
Interactive Delivery	0.13	1.15	0.18
Deferred Delivery	0.62	2.00	0.94
Stock-Level	2.21	5.87	2.68
Menu	0.14	1.22	0.18

### 6.3 Keying and Think Times

*The minimum, the average, and the maximum keying and think times must be reported for each transaction type. [Clause 8.1.6.3]*

Keying Times			
Type	Average	Maximum	Minimum
New-Order	18.01	18.10	18.00
Payment	3.01	3.08	3.00
Order-Status	2.01	2.08	2.00
Delivery	2.01	2.08	2.00
Stock-Level	2.01	2.06	2.00

Think Times			
Type	Average	Maximum	Minimum
New-Order	12.05	120.51	0.00
Payment	12.03	120.52	0.00
Order-Status	10.14	100.49	0.00
Delivery	5.03	50.50	0.00
Stock-Level	5.06	50.50	0.00

## 6.4 Graphs

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type. [Clause 8.1.6.4]


The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction. [Clause 8.1.6.5]

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type. [Clause 8.1.6.6]

Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type. [Clause 8.1.6.7]

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction. [Clause 8.1.6.8]

**FIGURE 5: NEW-ORDER RESPONSE TIME DISTRIBUTION**

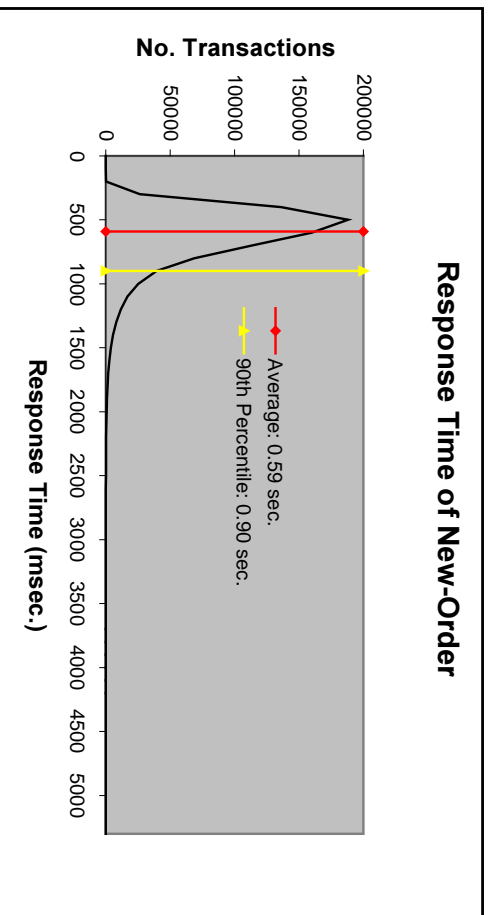

**FIGURE 6: PAYMENT RESPONSE TIME DISTRIBUTION**

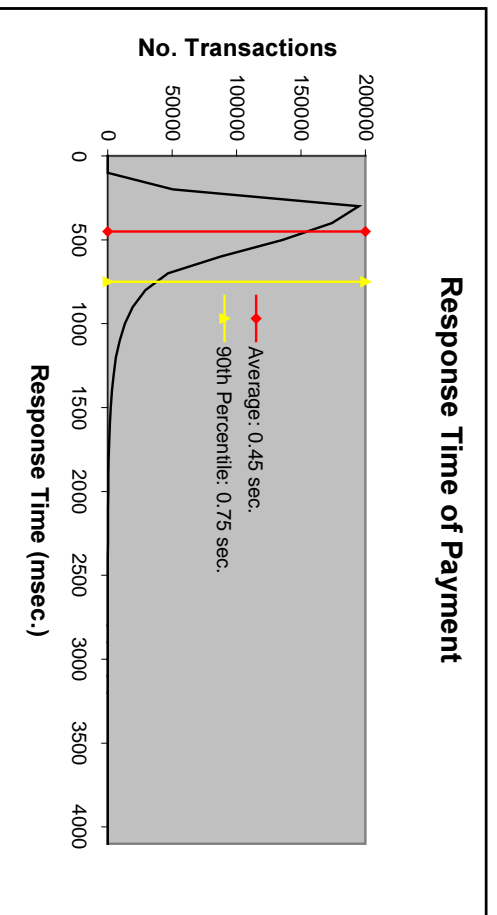


FIGURE 7: ORDER-STATUS RESPONSE TIME DISTRIBUTION

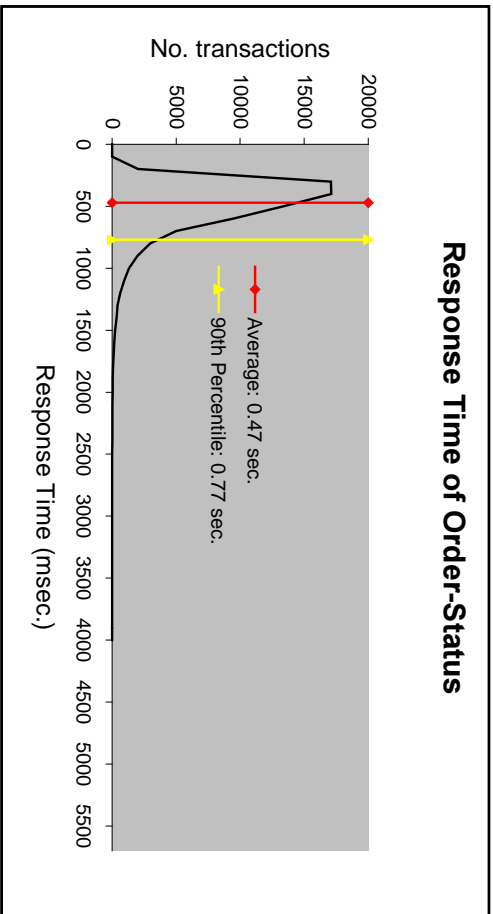


FIGURE 8: DELIVERY RESPONSE TIME DISTRIBUTION

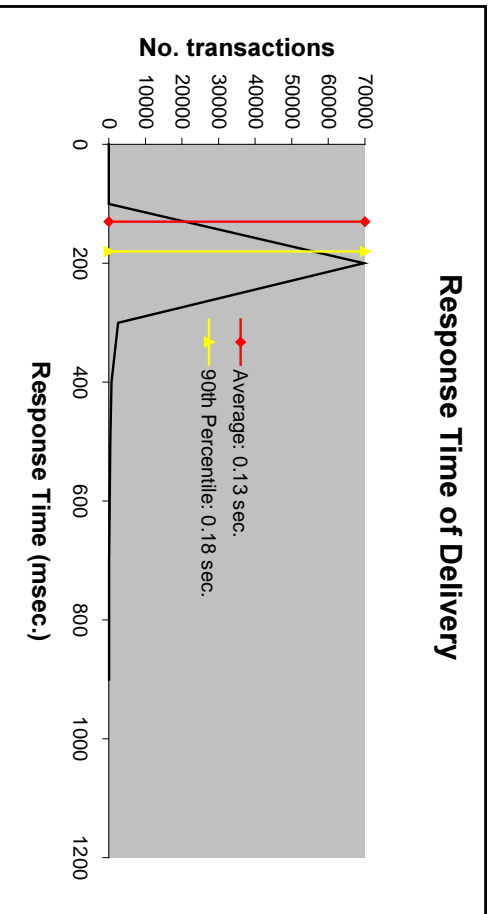


FIGURE 9: STOCK-LEVEL RESPONSE TIME DISTRIBUTION

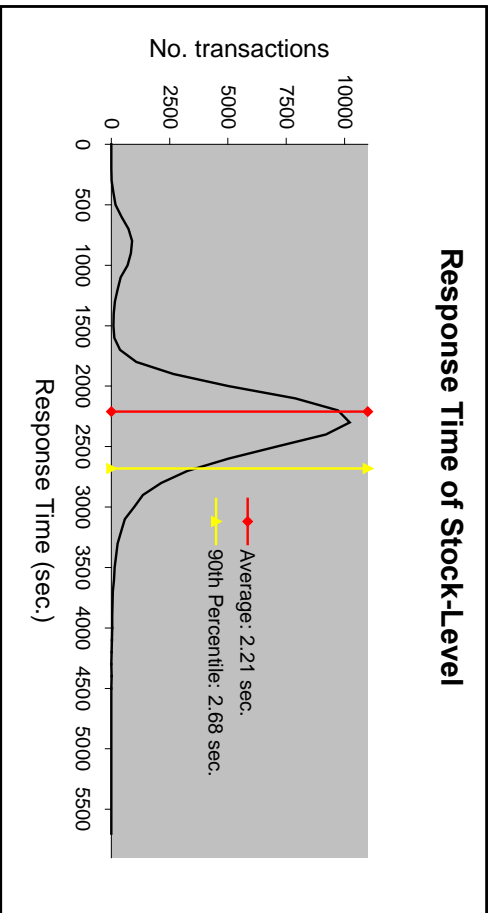


FIGURE 10: RESPONSE TIME VERSUS THROUGHPUT

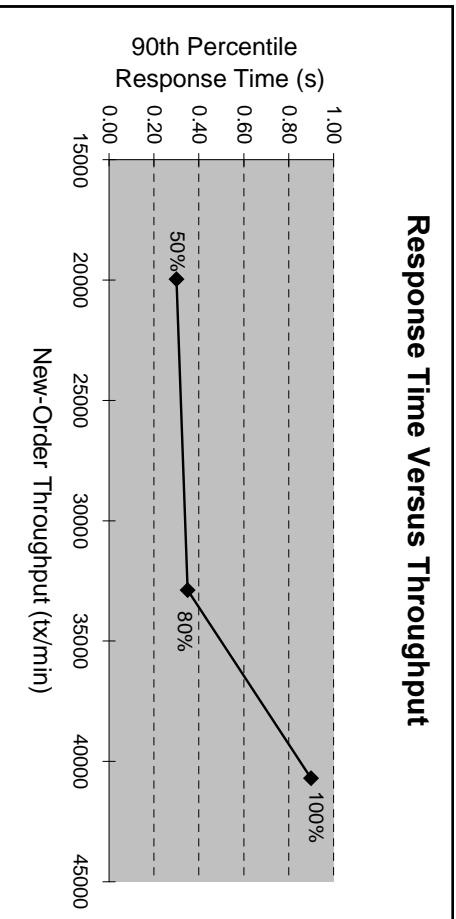




FIGURE 11: NEW-ORDER THINK TIME DISTRIBUTION


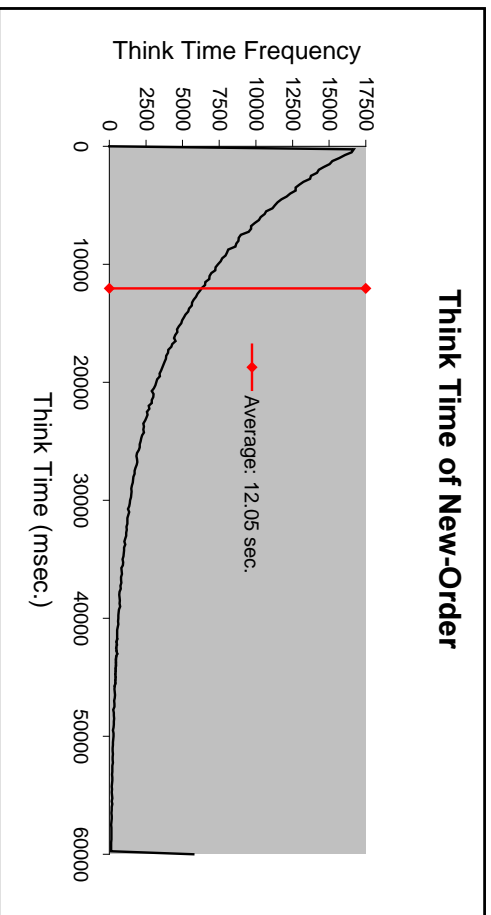


FIGURE 12: THROUGHPUT VERSUS ELAPSED TIME

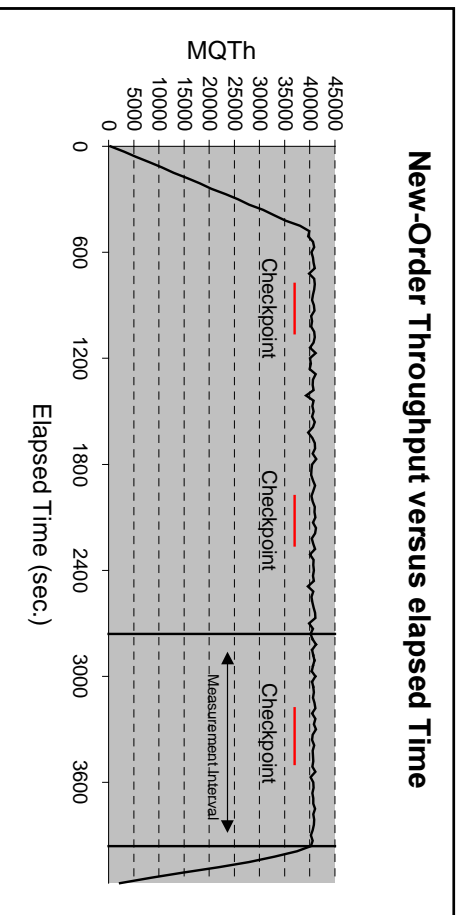

### 6.5 Steady State Determination

*The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval (see Clause 5.5) must be described. [Clause 8.1.6.9]*

In all test runs, steady state was achieved before the measurement period began. Steady state was determined to occur based on a visual inspection of fpmC versus time (see graph in section 6.4).

The graph in section 6.4 illustrates that the measurement period was within the steady state period for the run. One checkpoint occurred during the measurement period.

## 6.6 Work Performed

*A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported. [Clause 8.1.6.10]*

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped and captured in RTE log files before being transmitted. There was one log file for each user. The input screen for the requested transaction was returned and it was also captured and timestamped in the RTE log files. The difference between these two timestamps was the menu response time.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped and captured in RTE log files. The return of the screen with the required response data was timestamped and captured in the RTE log files. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to Internet Information Server running on the client machines through Ethernet LANs. Internet Information Server handled all screen I/O as well as all requests to the database on the server. Internet Information Server communicated with the database server over COM+ which was used as transaction monitor.

All database operations like update, select, delete and insert are performed by one of the TPC-C back end programs. The TPC-C backend program commits the transaction after all the corresponding operations are done.

Modified database buffers are migrated to disk a least-recently-used basis independent of transaction commits. In addition, every block modification is protected by log records. Asynchronously the log buffers are flushed to a log file on disk either when the transaction is committed or when the log buffer's fill state reaches it's limit. The log buffer's always flushed by a commit before it become full.

To perform checkpoints at specific intervals, we set SQL server recovery interval to the maximum allowable value and wrote a script to schedule multiple checkpoints at specific intervals. By setting the trace flag #3502, SQL Server logged the checkpoint beginning and ending time in the ERRORLOG file. The script included a wait time between each checkpoint equal to the measurement interval which was 20 minutes. The checkpoint script was started manually after the RTE had all users logged in and sending transactions.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. Upon completion of the checkpoint, Microsoft SQL Server wrote a special record to the recovery log to indicate that all disk operations had been satisfied to this point.

## 6.7 Reproducibility

*A description of the method used to determine the reproducibility of the measurement results must be reported. [Clause 8.1.6.11]*

The Primergy K800 system test was run twice to ensure the reproducibility of the results. The reproducibility test run under exactly the same conditions as the reported test. All tests conform to the TPC rules.

The tpmC result from the reproducibility test was within 0.17% of the reported tpmC.

In the following, both results are shown to document the reproducibility:

	<b>tpmC</b>
reported test	40,696.25
reproducibility test	40,627.25

## 6.8 Duration of Measurement

*A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included. [Clause 8.1.6.12]*

The measurement interval of the Primergy K800 system test was 20 minutes. This measurement interval corresponds to the amount of time from the beginning of one checkpoint to the beginning of the next (which, actually, is less than the amount of time it takes to fill a log file).

## 6.9 Regulation of Transaction Mix

*The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed. [Clause 8.1.6.13]*

The transaction mix was regulated by weighted distribution. The chosen weights meet the required minimum percentages of the mix which are described in Clause 5.2.3 of the Standard Specifications. No adjustments were made by the RTE.

## 6.10 Transaction Mix

*The percentage of the total mix for each transaction type must be disclosed. [Clause 8.1.6.14]*

	<b>Percentage</b>
New-Order	44.79 %
Payment	43.09 %
Order-Status	4.04 %
Delivery	4.06 %
Stock-Level	4.02 %

## **6.11 Transaction Statistics**

*The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. [Clause 8.1.6.15]*

*The average number of order-lines entered per New-Order transaction must be disclosed. [Clause 8.1.6.16]*

*The percentage of remote order-lines entered per New-Order transaction must be disclosed. [Clause 8.1.6.17]*

*The percentage of remote Payment transactions must be disclosed. [Clause 8.1.6.18]*

*The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. [Clause 8.1.6.19]*

*The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed. [Clause 8.1.6.20]*

The numerical quantities which are required in Clause 8.1.6.15 to 8.1.6.20 are already listed in a table above (see section 3.5).

## **6.12 Checkpoint Statistics**

*The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint and the Checkpoint Interval must be disclosed. [Clause 8.1.6.21]*

There were 2 checkpoints before and one during the measurement interval. The third checkpoint occurred 7 minutes after the start of the measurement interval. The checkpoint interval was 1200 seconds. The duration of the checkpoint during measurement was 315 seconds.

## 7. Clause 6 Related Items - SUT, Driver, and Communication Definition

### 7.1 RTE Inputs

*If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g. scripts) to the RTE had been used. [Clause 8.1.7.1]*

Microsoft Benchmark was used as the RTE to emulate the terminals. Its input parameters are shown in Appendix C - Tunable Parameters and Options.

We used COM+ to simulate terminal users, generate random data, record response times and statistical data. Its input parameters are shown in Appendix C - Tunable Parameters and Options.

### 7.2 Functionality and Performance of Emulated Components

*It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to that of the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed. [Clause 8.1.7.2]*

The Driver System consisted of a Primergy 870-40. This driver was attached to the client machine through an Ethernet LAN. Since this is exactly the same connectivity as configured in the priced system, no component was emulated. Therefore, the test described in Clause 6.6.3.4 was not required.

### 7.3 Functional Diagrams of the Benchmark and Proposed Configuration

*A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all software and hardware functionality being performed on the Driver System, and its interface to the SUT must be disclosed (see Clause 6.6.3.6). [Clause 8.1.7.3]*

Figure 1 and Figure 2 in section 1.4 show the functional diagrams of the benchmark configuration and the priced configuration.

### 7.4 Network Configurations of the Tested and Proposed Services

*The network configurations of both the tested services and the proposed (target) services which are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed (see Clause 6.6.4). [Clause 8.1.7.4]*

Figure 1 and Figure 2 in section 1.4 show the network setup of both configurations. The driver replaces the workstations.

In the tested configuration one standard ethernet LAN segment was used to connect the server with the clients and 7 standard ethernet LAN segments were used to connect each of the 5 clients with the 5 RTE systems.

In the priced configuration 35 standard ethernet LAN segments were used to connect 32,900 workstations. Each client has 6580 users connected with 7 ethernet segments.

## **7.5 Network Bandwidth**

*The bandwidth of the network(s) used in the tested / priced configuration must be disclosed. [Clause 8.1.7.5]*

The Ethernet used in the local area network (LAN) between the emulated user system and the front-end system complies with the IEEE 802.3 standard. Its bandwidth is 10 Mbps. Between front-end and SUT the bandwidth is 100 Mbps.

## **7.6 Operator Intervention**

*If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed. [Clause 8.1.7.6]*

The Primergy K800 requires no operator intervention to sustain the reported throughput.

## 8. Clause 7 Related Items - Pricing

### 8.1 System Pricing

*A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source(s) and effective date(s) of price(s) must also be reported. [Clause 8.1.8.1]*

*The total 5-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed. [Clause 8.1.8.2]*

The details of the hardware and software are reported in the summary in front of this report. The spreadsheet used to determine the 5-year price and the spreadsheet used to describe the priced configuration can be found in Appendix D - Pricing Details.

### 8.2 Availability Dates

*The committed delivery date for general availability (availability date) of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available. [Clause 8.1.8.3]*

All hardware and software components used in the price calculations of the Primergy K800 system will be generally available from Fujitsu Siemens Computers GmbH as of January 1, 2000.

### 8.3 Throughput and Price/Performance

*A statement of the measured tpmC, as well as the respective calculations for 5-year pricing, price/performance (price/tpmC), and the availability date must be included. [Clause 8.1.8.4]*

Primergy K800 system was measured at 40,696.25 tpmC with Microsoft SQL Server 7.0 Enterprise Edition with a 5-year system price of €682,917. The respective price/performance for the Primergy K800 is €16.78/tpmC. The priced Primergy K800 will be available as of January 1, 2000.

### 8.4 Country Specific Pricing

*Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7 [Clause 8.1.8.5]*

The system is being priced for Germany.

## 8.5

### Usage Pricing

*For any usage pricing, the sponsor must disclose:*

- *Usage level at which the component was priced.*
- *A statement of the company policy allowing such pricing.*

*[Clause 8.1.8.6]*

The component pricing based on usage is shown below:

- One Microsoft SQL Server, Enterprise Edition 7.0 license (includes unlimited user license)
- One Microsoft Windows NT Server, Enterprise Edition 4.0 license (includes 25 client access licenses)
- Five Microsoft Windows 2000 Server license (includes 25 client access licenses)
- One Microsoft Visual C++ Professional 6.0



## 9. Clause 8 Related Items - Audit

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

A review of the pricing model is required to ensure that all components required are priced (see Clause 9.2.8). The auditor is not required to review the final Full Disclosure Report or the final pricing prior to issuing the attestation letter. [Clause 8.1.9]

The benchmark test of the Primergy K800 system with Microsoft SQL Server 7.0 Enterprise Edition was independently audited by:

Bradley Askins, a TPC certified auditor of Infosizing.  
The attestation letter is included in Appendix F.

Requests for this TPC-C Full Disclosure Report should be sent to:

Transaction Processing Performance Council  
c/o Shanley Public Relations  
777 North First Street, Suite 6000  
San Jose, CA 95112-6311

or

FUJITSU SIEMENS COMPUTERS SHV SERVER DSS  
Entry Server Performance Lab  
Mr. Bathe  
Heinz-Nixdorf-Ring 1  
33106 Paderborn  
Germany



## Appendix A - Application Source Code

```
LIBRARY TPCC.DLL

EXPORTS

    GetExtensionVersion    @1
    HttpExtensionProc      @2
    TerminateExtension     @3

/*      FILE:          TPCC.H
 *
 *      Microsoft TPC-C Kit Ver. 4.20.000
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
 *
 *      PURPOSE:       Header file for ISAPI TPCC.DLL, defines structures
and functions used in the isapi tpcc.dll.
 *
 */

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE      101
#define _APS_NEXT_COMMAND_VALUE      40001
#define _APS_NEXT_CONTROL_VALUE      1000
#define _APS_NEXT_SYMED_VALUE        101

#define TP_MAX_RETRIES                50

//note that the welcome form must be processed first as terminal ids
assigned here, once the
//terminal id is assigned then the forms can be processed in any order.
#define WELCOME_FORM                  1
//beginning form no term id assigned, form id
#define MAIN_MENU_FORM                2
//term id assigned main menu form id
#define NEW_ORDER_FORM                3
//new order form id
#define PAYMENT_FORM                  4
//payment form id
#define DELIVERY_FORM                 5
//delivery form id
#define ORDER_STATUS_FORM             6
//order status id

#define STOCK_LEVEL_FORM              7
//stock level form id

//This macro is used to prevent the compiler error unused formal
parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep distinct for each
terminal or client connection.
typedef struct _CLIENTDATA
{
    int                iNextFree;
//index of next free element or -1 if this entry in use.
    int                w_id;
//warehouse id assigned at welcome form
    int                d_id;
//district id assigned at welcome form

    int                iSyncId;
//synchronization id
    int                iTickCount;
//time
of last access;

    CTPCC_BASE        *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational interface for terminal
id support
typedef struct _TERM
{
    int                iNumEntries;
//total allocated terminal array entries
    int                iFreeList;
//next available terminal array element or -1 if none
    int                iMasterSyncId;
//synchronization id
    CLIENTDATA        *pClientData;
//pointer to allocated client data
} TERM;

typedef TERM *PTERM;
//pointer to terminal structure type
```

```

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADDLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,
    ERR_NEWORDER_CUSTOMER_INVALID,
    ERR_NEWORDER_CUSTOMER_KEY,
    ERR_NEWORDER_DISTRICT_INVALID,
    ERR_NEWORDER_FORM_MISSING_DID,
    ERR_NEWORDER_ITEMID_INVALID,
    ERR_NEWORDER_ITEMID_RANGE,
    ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
    ERR_NEWORDER_MISSING_IID_KEY,
    ERR_NEWORDER_MISSING_QTY_KEY,
    ERR_NEWORDER_MISSING_SUPPW_KEY,
    ERR_NEWORDER_NOITEMS_ENTERED,
    ERR_NEWORDER_QTY_INVALID,
    ERR_NEWORDER_QTY_RANGE,
    ERR_NEWORDER_QTY_WITHOUT_SUPPW,
    ERR_NEWORDER_SUPPW_INVALID,
    ERR_NO_SERVER_SPECIFIED,
    ERR_ORDERSTATUS_CID_AND_CLT,
    ERR_ORDERSTATUS_CID_INVALID,
    ERR_ORDERSTATUS_CLT_RANGE,
    ERR_ORDERSTATUS_DID_INVALID,
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    ERR_PAYMENT_CDI_INVALID,
    ERR_PAYMENT_CID_AND_CLT,
    ERR_PAYMENT_CUSTOMER_INVALID,
    ERR_PAYMENT_CWI_INVALID,
    ERR_PAYMENT_DISTRICT_INVALID,
    ERR_PAYMENT_HAM_INVALID,
    ERR_PAYMENT_HAM_RANGE,
    ERR_PAYMENT_LAST_NAME_TOO_LONG,
    ERR_PAYMENT_MISSING_CDI_KEY,
    ERR_PAYMENT_MISSING_CID_CLT,
    ERR_PAYMENT_MISSING_CID_KEY,

```

```

ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID

```

```

};

class CWEBCLNT_ERR : public CBaseErr
{
public:
    CWEBCLNT_ERR(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CWEBCLNT_ERR(WEBERROR Err, char *szTextDetail, DWORD
dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail, szTextDetail );
        m_SystemErr = dwSystemErr;
        m_szErrorText = NULL;
    };

    ~CWEBCLNT_ERR()
    {
        if (m_szTextDetail != NULL)
            delete [] m_szTextDetail;
        if (m_szErrorText != NULL)
            delete [] m_szErrorText;
    };

    WEBERROR      m_Error;
    char          *m_szTextDetail;    //
    char          *m_szErrorText;
    DWORD         m_SystemErr;

    int ErrorType() {return ERR_TYPE_WEBDLL;};
    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

```

```

//These constants have already been defined in engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START          2
#define TXN_EVENT_STOP          4
#define TXN_EVENT_WARNING      6 //used to record a warning
into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID
lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int *pCmd, int
*pFormId, int *pTermId, int *pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int iError, int
iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax,
WEBERROR err);
int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR NoKeyErr,
WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int iErrorNum,
int iTermId, int iSyncId, char *szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA *pStockLevelData,
BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA *pNewOrderData, BOOL
bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData, BOOL
bInput, char *szForm);
void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA
*pOrderStatusData, BOOL bInput, char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData, BOOL
bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId,
char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId,
char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId,
char *szBuffer);

```

```

void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA
*pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA
*pOrderStatusData);
BOOL PostDeliveryInfo(short w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);

//Microsoft Developer Studio generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

////////////////////////////////////
////
#undef APSTUDIO_READONLY_SYMBOLS

////////////////////////////////////
////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef _MAC
////////////////////////////////////
////
//
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGS 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L

```

```

FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C HTML DLL Server (DBLIB)\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "TPC-C HTML DLL Server (DBLIB)\0"
            VALUE "FileVersion", "0, 4, 0, 0\0"
            VALUE "InternalName", "tpcc\0"
            VALUE "LegalCopyright", "Copyright © 1997\0"
            VALUE "OriginalFilename", "tpcc.dll\0"
            VALUE "ProductName", "Microsoft tpcc\0"
            VALUE "ProductVersion", "0, 4, 0, 0\0"
        END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END

#endif // !_MAC

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
////
//
// TEXTINCLUDE
//

1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"afxres.h\"\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

```

```

////////////////////////////////////
////
//
// Dialog
//

IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION | WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON "OK", IDOK, 129, 7, 50, 14
    PUSHBUTTON "Cancel", IDCANCEL, 129, 24, 50, 14
END

////////////////////////////////////
////
//
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
END
#endif // APSTUDIO_INVOKED

#endif // English (U.S.) resources
////////////////////////////////////
////
//
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////
////
#endif // not APSTUDIO_INVOKED

```

```

/*      FILE:          TPCC.C
*
*          Microsoft TPC-C Kit Ver. 4.20.000
*          Copyright Microsoft, 1999
*
*          All Rights Reserved
*
*          Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
*
*      PURPOSE:      Main module for TPCC.DLL which is an ISAPI service
dll.
*      Contact:      Charles Levine (clevine@microsoft.com)
*
*      Change history:
*          4.20.000 - reworked error handling; added options for COM
and Encina txn monitors
*/

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

#include "..\..\common\src\trans.h"          //tpckit transaction header
contains definations of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"

#include "..\..\common\txnlog\include\rtetime.h"
#include "..\..\common\txnlog\include\spinlock.h"
#include "..\..\common\txnlog\include\txnlog.h"

// Database layer includes
#include "..\..\db_dblib_dll\src\tpcc_dblib.h"          // DBLIB
implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"          // ODBC
implementation of TPC-C txns

```

```

// Txn monitor layer includes
#include "..\..\tm_com_dll\src\tpcc_com.h"          // COM
Services implementation on TPC-C txns
#include "..\..\tm_tuxedo_dll\src\tpcc_tux.h"          // interface
to Tuxedo libraries
#include "..\..\tm_encina_dll\src\tpcc_enc.h"          // interface
to Encina libraries

#include "httpext.h"          //ISAPI DLL information
header
#include "tpcc.h"          //this dlls specific
structure, value e.t. header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish input and output
flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char          szMyComputerName [MAX_COMPUTERNAME_LENGTH+1];

//Terminal client id structure
TERM  Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version level of this web
client interface.
// The RTE must be synchronized with the interface level on login,
otherwise the login
// will fail. This is a sanity check to catch problems resulting from
mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "410"

static CRITICAL_SECTION          TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB          *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC          *pCTPCC_ODBC_new;
TYPE_CTPCC_TUXEDO          *pCTPCC_TUXEDO_new;
TYPE_CTPCC_ENCINA          *pCTPCC_ENCINA_new;
TYPE_CTPCC_ENCINA          *pCTPCC_ENCINA_post_init;
TYPE_CTPCC_COM          *pCTPCC_COM_new;

// For deferred Delivery txns:
CTxnLog          *txnDelilog = NULL;
//used to log delivery transaction information

```

```

HANDLE                hWorkerSemaphore    =
INVALID_HANDLE_VALUE;
HANDLE                hDoneEvent         =
INVALID_HANDLE_VALUE;
HANDLE                *pDeliHandles      = NULL;

// configuration settings from registry
TPCCREGISTRYDATA     Reg;

DWORD                dwNumDeliveryThreads = 4;
CRITICAL_SECTION     DelBuffCriticalSection;
//critical section for delivery transactions cache
DELIVERY_TRANSACTION *pDelBuff          = NULL;
DWORD                dwDelBuffSize      = 100;
// size of circular buffer for delivery txns
DWORD                dwDelBuffFreeCount;
// number of buffers free
DWORD                dwDelBuffBusyIndex = 0;
// index position of entry waiting to be delivered
DWORD                dwDelBuffFreeIndex = 0;
// index position of unused entry

#include "..\..\common\src\ReadRegistry.cpp"

/* FUNCTION: DllMain
 *
 * PURPOSE: This function is the entry point for the DLL. This
implementation is based on the
 * fact that DLL_PROCESS_ATTACH is only called from
the inet service once.
 *
 * ARGUMENTS: HANDLE hModule            module handle
 *            DWORD ul_reason_for_call  reason for
call
 *            LPVOID lpReserved
 *            reserved for future use
 *
 * RETURNS:   BOOL FALSE                errors
occured in initialization
 *            TRUE
 *            DLL successfully initialized
 */

BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID
lpReserved)
{
    DWORD i;
    char szEvent[LEN_ERR_STRING] = "\0";
    char szLogFile[128];
    char szDllName[128];

    try

```

```

    {
        switch( ul_reason_for_call )
        {
            case DLL_PROCESS_ATTACH:
                {
                    DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;
                    GetComputerName(szMyComputerName,
&dwSize);
                    szMyComputerName[dwSize] = 0;
                }

                DisableThreadLibraryCalls((HMODULE)hModule);

                InitializeCriticalSection(&TermCriticalSection);

                if ( ReadTPCCRegistrySettings( &Reg ) )
                    throw new CWEBCLNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

                dwDelBuffSize = min(
Reg.dwMaxPendingDeliveries, 10000 ); // min with 10000 as a sanity
constraint
                dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with 100 as a sanity
constraint

                TermInit();

                // load DLL for txn monitor
                if (Reg.eTxnMon == TUXEDO)
                {
                    strcpy( szDllName, Reg.szPath );
                    strcat( szDllName,
"tpcc_tuxedo.dll");

                    hLibInstanceTm = LoadLibrary(
szDllName );

                    if (hLibInstanceTm == NULL)
                        throw new CWEBCLNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                    // get function pointer to wrapper
                    for class constructor
                    pCTPCC_TUXEDO_new =
(TYPE_CTPCC_TUXEDO*) GetProcAddress(hLibInstanceTm,"CTPCC_TUXEDO_new");
                    if (pCTPCC_TUXEDO_new == NULL)
                        throw new CWEBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                }
                else if (Reg.eTxnMon == ENCINA)
                {
                    strcpy( szDllName, Reg.szPath );

```



```

"tpcc_encina.dll");
szDllName );
    strcat( szDllName,
    hLibInstanceTm = LoadLibrary(
    if (hLibInstanceTm == NULL)
        throw new CWEBCLNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
    // get function pointer to wrapper
for class constructor
    pCTPCC_ENCINA_new =
(TYPE_CTPCC_ENCINA*) GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_new");
    pCTPCC_ENCINA_post_init =
(TYPE_CTPCC_ENCINA*)
GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_post_init");
    if (pCTPCC_ENCINA_new == NULL)
        throw new CWEBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
    }
    else if (Reg.eTxnMon == COM)
    {
        strcpy( szDllName, Reg.szPath );
        strcat( szDllName, "tpcc_com.dll");
        hLibInstanceTm = LoadLibrary(
szDllName );
        if (hLibInstanceTm == NULL)
            throw new CWEBCLNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
        // get function pointer to wrapper
for class constructor
        pCTPCC_COM_new = (TYPE_CTPCC_COM*)
GetProcAddress(hLibInstanceTm,"CTPCC_COM_new");
        if (pCTPCC_COM_new == NULL)
            throw new CWEBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
    }
    // load DLL for database connection
    if ((Reg.eTxnMon == None) ||
(dwNumDeliveryThreads > 0))
    {
        if (Reg.eDB_Protocol == DBLIB)
        {
            strcpy( szDllName,
            Reg.szPath );
            strcat( szDllName,
            "tpcc_dblib.dll");
            LoadLibrary( szDllName );
            hLibInstanceDb =
            if (hLibInstanceDb == NULL)
                throw new
CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );

```

```

// get function pointer to
wrapper for class constructor
        pCTPCC_DBLIB_new =
(TYPE_CTPCC_DBLIB*) GetProcAddress(hLibInstanceDb,"CTPCC_DBLIB_new");
        if (pCTPCC_DBLIB_new ==
NULL)
            throw new
CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
        }
        else if (Reg.eDB_Protocol == ODBC)
        {
            strcpy( szDllName,
            Reg.szPath );
            strcat( szDllName,
            "tpcc_odbc.dll");
            hLibInstanceDb =
            LoadLibrary( szDllName );
            if (hLibInstanceDb == NULL)
                throw new
CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );
        // get function pointer to
wrapper for class constructor
        pCTPCC_ODBC_new =
(TYPE_CTPCC_ODBC*) GetProcAddress(hLibInstanceDb,"CTPCC_ODBC_new");
        if (pCTPCC_ODBC_new == NULL)
            throw new
CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
        }
    }
    if (dwNumDeliveryThreads)
    {
        // for deferred delivery txns:
        hDoneEvent = CreateEvent( NULL, TRUE
/* manual reset */, FALSE /* initially not signalled */, NULL );
        InitializeCriticalSection(&DelBuffCriticalSection);
        hWorkerSemaphore = CreateSemaphore(
NULL, 0, dwDelBuffSize, NULL );
        dwDelBuffFreeCount = dwDelBuffSize;
        InitJulianTime(NULL);
        // create unique log file name based
on delilog-yyymmdd-hhmm.log
        SYSTEMTIME Time;
        GetLocalTime( &Time );
        wsprintf( szLogFile, "%sdelivery-
%2.2d%2.2d%2.2d-%2.2d%2.2d.log",
            Reg.szPath,
            Time.wYear % 100, Time.wMonth, Time.wDay, Time.wHour, Time.wMinute );

```

```

TXN_LOG_WRITE);
        txnDelilog = new CTxnLog(szLogFile,

        //write event into txn log for START
        txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName,
sizeof(szMyComputerName));

        // allocate structures for delivery
buffers and thread mgmt
HANDLE[dwNumDeliveryThreads];
        pDeliHandles = new
DELIVERY_TRANSACTION[dwDelBuffSize];
        pDelBuff = new
perform actual delivery txns
        // launch DeliveryWorkerThread to
        for(i=0; i<dwNumDeliveryThreads;
i++)
        {
                pDeliHandles[i] = (HANDLE)
        _beginthread( DeliveryWorkerThread, 0, NULL );
        if (pDeliHandles[i] ==
INVALID_HANDLE_VALUE)
                throw new
CWEBCLNT_ERR( ERR_DELIVERY_THREAD_FAILED );
        }
        break;

        case DLL_PROCESS_DETACH:
        if (dwNumDeliveryThreads)
        {
                if (txnDelilog != NULL)
        {
                //write event into txn log
for STOP
                txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName,
sizeof(szMyComputerName));

                // This will do a clean
shutdown of the delivery log file
                CTxnLog *txnDelilogLocal =
txnDelilog;
                txnDelilog= NULL;
                delete txnDelilogLocal;
        }

        delete [] pDeliHandles;
        delete [] pDelBuff;

        CloseHandle( hWorkerSemaphore );

```

```

        CloseHandle( hDoneEvent );
DeleteCriticalSection(&DelBuffCriticalSection);
        }

DeleteCriticalSection(&TermCriticalSection);

        if (hLibInstanceTm != NULL)
                FreeLibrary( hLibInstanceTm );
        hLibInstanceTm = NULL;

        if (hLibInstanceDb != NULL)
                FreeLibrary( hLibInstanceDb );
        hLibInstanceDb = NULL;

        Sleep(500);
        break;

        default:
                /* nothing */;
        }
}
catch (CBaseErr *e)
{
        WriteMessageToEventLog( e->ErrorText() );
        delete e;
        TerminateExtension(0);
        return FALSE;
}
catch (...)
{
        WriteMessageToEventLog(TEXT("Unhandled exception. DLL
could not load."));
        TerminateExtension(0);
        return FALSE;
}

return TRUE;
}

/* FUNCTION: GetExtensionVersion
*
* PURPOSE: This function is called by the inet service when the DLL
is first loaded.
*
* ARGUMENTS: HSE_VERSION_INFO *pVer passed in structure in which
to place expected version number.
*
* RETURNS: TRUE inet service expected return value.
*/

```

```

BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO *pVer)
{
    pVer->dwExtensionVersion = MAKELONG(HSE_VERSION_MINOR,
HSE_VERSION_MAJOR);
    lstrcpy(pVer->lpszExtensionDesc, "TPC-C Server.",
HSE_MAX_EXT_DLL_NAME_LEN);

    // TODO: why do we need this here instead of in the DLL attach?
    if (Reg.eTxnMon == ENCINA)
        pCTPCC_ENCINA_post_init();

    return TRUE;
}

/* FUNCTION: TerminateExtension
 *
 * PURPOSE: This function is called by the inet service when the DLL
is about to be unloaded.
 *
 * Release all resources in anticipation of being
unloaded.
 *
 * RETURNS: TRUE inet service expected return value.
 */

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0; i<dwNumDeliveryThreads; i++)
            WaitForSingleObject( pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
 *
 * PURPOSE: This function is the main entry point for the TPCC DLL.
The internet service
 *
 * calls this function passing in the http string.
 *
 * ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB structure pointer to
passed in internet
 *
 * service information.
 *
 * RETURNS: DWORD HSE_STATUS_SUCCESS
connection can be dropped if error

```

```

 *
HSE_STATUS_SUCCESS_AND_KEEP_CONN keep connect valid comment
sent
 *
 * COMMENTS: None
 */

DWORD WINAPI HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int iCmd, FormId, TermId, iSyncId;
    char szBuffer[4096];

    int lpbSize;
    static char szHeader[] = "200 Ok";
    DWORD dwSize = 6; // initial value is
strlen(szHeader)
    char szHeader1[4096];

#ifdef ICECAP
    StartCAP();
#endif

    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd, &FormId, &TermId,
&iSyncId);

        if (TermId != 0)
        {
            if ( TermId < 0 || TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )
            {
                // debugging...
                char szTmp[128];
                wsprintf( szTmp, "Invalid term ID; TermId =
%d", TermId );

                WriteMessageToEventLog( szTmp );

                throw new CWEBCLNT_ERR( ERR_INVALID_TERMID
);
            }

            //must have a valid syncid here since termid is
valid

            if (iSyncId != Term.pClientData[TermId].iSyncId)
                throw new CWEBCLNT_ERR(
ERR_INVALID_SYNC_CONNECTION );

            //set use time

```

```

        Term.pClientData[TermId].iTickCount =
GetTickCount();
    }

    switch(iCmd)
    {
    case 0:
        WelcomeForm(pECB, szBuffer);
        break;
    case 1:
        switch( FormId )
        {
            case WELCOME_FORM:
            case MAIN_MENU_FORM:
                break;
            case NEW_ORDER_FORM:
                ProcessNewOrderForm(pECB, TermId,
szBuffer);
                break;
            case PAYMENT_FORM:
                ProcessPaymentForm(pECB, TermId,
szBuffer);
                break;
            case DELIVERY_FORM:
                ProcessDeliveryForm(pECB, TermId,
szBuffer);
                break;
            case ORDER_STATUS_FORM:
                ProcessOrderStatusForm(pECB, TermId,
szBuffer);
                break;
            case STOCK_LEVEL_FORM:
                ProcessStockLevelForm(pECB, TermId,
szBuffer);
                break;
        }
        break;
    case 2:
        // new-order selected from menu; display new-order
input form
        MakeNewOrderForm(TermId, NULL, INPUT_FORM,
szBuffer);
        break;
    case 3:
        // payment selected from menu; display payment
input form
        MakePaymentForm(TermId, NULL, INPUT_FORM,
szBuffer);
        break;
    case 4:
        // delivery selected from menu; display delivery
input form

```

```

        MakeDeliveryForm(TermId, NULL, INPUT_FORM,
szBuffer);
        break;
    case 5:
        // order-status selected from menu; display order-
status input form
        MakeOrderStatusForm(TermId, NULL, INPUT_FORM,
szBuffer);
        break;
    case 6:
        // stock-level selected from menu; display stock-
level input form
        MakeStockLevelForm(TermId, NULL, INPUT_FORM,
szBuffer);
        break;
    case 7:
        // ExitCmd
        TermDelete(TermId);
        WelcomeForm(pECB, szBuffer);
        break;
    case 8:
        SubmitCmd(pECB, szBuffer);
        break;
    case 9:
        // menu
        MakeMainMenuForm(TermId,
Term.pClientData[TermId].iSyncId, szBuffer);
        break;
    case 10:
        // CMD=Clear
        // resets all connections; should only be used when
no other connections are active
        TermDeleteAll();
        TermInit();
        WelcomeForm(pECB, szBuffer);
        break;
    case 11:
        // CMD=Stats
        StatsCmd(pECB, szBuffer);
        break;
    }
}
catch (CBaseErr *e)
{
    ErrorForm( pECB, e->ErrorType(), e->ErrorNum(), TermId,
iSyncId, e->ErrorText(), szBuffer );
    delete e;
}
catch (...)
{
    ErrorForm( pECB, ERR_TYPE_WEBDLL, 0, TermId, iSyncId,
"Error: Unhandled exception in Web Client.", szBuffer );
}

```

```

#ifdef ICECAP
    StopCAP();
#endif

    lpbSize = strlen(szBuffer);
    wsprintf(szHeader1,
        "Content-Type: text/html\r\n"
        "Content-Length: %d\r\n"
        "Connection: Keep-Alive\r\n\r\n" , lpbSize);
    strcat( szHeader1, szBuffer );

    (*pECB->ServerSupportFunction)(pECB->ConnID,
HSE_REQ_SEND_RESPONSE_HEADER, szHeader, (LPDWORD) &dwSize,
(LPDWORD)szHeader1);

    //finish up and keep connection
    pECB->dwHttpStatusCode = 200;
    return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR    szMsg[256];
    HANDLE   hEventSource;
    LPTSTR   lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL, TEXT("TPCC.DLL"));

    _stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event source
            EVENTLOG_ERROR_TYPE, // event type
            0, // event category
            0, // event ID
            NULL, // current user's SID
            2, // strings in lpszStrings
            0, // no bytes of raw data
            (LPCTSTR *)lpszStrings, // array of error strings
            NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

```

```

/* FUNCTION: DeliveryWorkerThread
 *
 * PURPOSE: This function processes deferred delivery txns. There are
 typically several
 *
 *          threads running this routine. The number of
 threads is determined by an entry
 *
 *          read from the registry. The thread waits for work
 by waiting on semaphore.
 *
 *          When a delivery txn is posted, the semaphore is
 released. After processing
 *
 *          the delivery txn, information is logged to record
 the txn status and execution
 *
 *          time.
 */

/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE          *pTxn = NULL;

    DELIVERY_TRANSACTION    delivery;
    PDELIVERY_DATA          pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF    txnDeliRec;

    DWORD                index;
    HANDLE                handles[2];

    SYSTEMTIME            trans_end;           //delivery
transaction finished time
    SYSTEMTIME            trans_start;        //delivery transaction start
time

    assert(txnDelilog != NULL);

    try
    {
        if (Reg.eDB_Protocol == ODBC)
            pTxn = pCTPCC_ODBC_new( Reg.szDbServer,
Reg.szDbUser, Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        else if (Reg.eDB_Protocol == DBLIB)
            pTxn = pCTPCC_DBLIB_new( Reg.szDbServer,
Reg.szDbUser, Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        pDeliveryData = pTxn->BuffAddr_Delivery();
    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in Delivery Txn thread. Could not
connect to database. "
                    "%s. Server=%s, User=%s, Password=%s,
Database=%s",
                    e->ErrorText(), Reg.szDbServer,
Reg.szDbUser, Reg.szDbPassword, Reg.szDbName );
        WriteMessageToEventLog( szTmp );
    }
}

```

```

        delete e;
        goto ErrorExit;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception caught in
DeliveryWorkerThread."));
        goto ErrorExit;
    }

    while (TRUE)
    {
        try
        {
            //while delivery thread running, i.e. user has not
requested termination
            while (TRUE)
            {
                // need to wait for multiple objects:
program exit or worker semaphore;
                handles[0] = hDoneEvent;
                handles[1] = hWorkerSemaphore;
                index = WaitForMultipleObjects( 2,
&handles[0], FALSE, INFINITE );
                if (index == WAIT_OBJECT_0)
                    goto ErrorExit;

                ZeroMemory(&txnDeliRec,
sizeof(txnDeliRec));
                txnDeliRec.TxnType =
TXN_REC_TYPE_TPCC_DELIV_DEF;

                // make a local copy of current entry from
delivery buffer and increment buffer index

                EnterCriticalSection(&DelBuffCriticalSection);
                delivery = *(pDelBuff+dwDelBuffBusyIndex);
                dwDelBuffFreeCount++;
                dwDelBuffBusyIndex++;
                if (dwDelBuffBusyIndex == dwDelBuffSize)
                // wrap-around if at end of buffer
                    dwDelBuffBusyIndex = 0;

                LeaveCriticalSection(&DelBuffCriticalSection);

                pDeliveryData->w_id = delivery.w_id;
                pDeliveryData->o_carrier_id =
delivery.o_carrier_id;

                txnDeliRec.w_id = pDeliveryData->w_id;
                txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;

```

```

                txnDeliRec.TxnStartT0 =
Get64BitTime(&delivery.queue);

                GetLocalTime( &trans_start );
                pTxn->Delivery();
                GetLocalTime( &trans_end );

                //log txn
                txnDeliRec.TxnStatus = ERR_SUCCESS;
                for (int i=0; i<10; i++)
                    txnDeliRec.o_id[i] = pDeliveryData-
>o_id[i];

                txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) - txnDeliRec.TxnStartT0);
                txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) - Get64BitTime(&trans_start));

                if (txnDelilog != NULL)
                    txnDelilog->WriteToLog(&txnDeliRec);
            }
        }
        catch (CBaseErr *e)
        {
            char szTmp[1024];
            wsprintf( szTmp, "Error in Delivery Txn thread.
%s", e->ErrorText() );
            WriteMessageToEventLog( szTmp );
            delete e;

            // log the error txn
            txnDeliRec.TxnStatus = e->ErrorType();
            if (txnDelilog != NULL)
                txnDelilog->WriteToLog(&txnDeliRec);
        }
        catch (...)
        {
            // unhandled exception; shouldn't happen; not much
we can do...
            WriteMessageToEventLog(TEXT("Unhandled exception
caught in DeliveryWorkerThread."));
        }
    }

ErrorExit:
    delete pTxn;
    _endthread();
}

/* FUNCTION: PostDeliveryInfo
 *
 * PURPOSE: This function enters the delivery txn into the deferred
delivery buffer.
 *

```

```

* RETURNS:          BOOL   FALSE  delivery information posted
successfully
*
*                  TRUE   error cannot post
delivery info
*/

BOOL PostDeliveryInfo(short w_id, short o_carrier_id)
{
    BOOL bError;

    EnterCriticalSection(&DelBuffCriticalSection);
    if (dwDelBuffFreeCount > 0)
    {
        bError = FALSE;
        (pDelBuff+dwDelBuffFreeIndex)->w_id      =
w_id;
        (pDelBuff+dwDelBuffFreeIndex)->o_carrier_id =
o_carrier_id;
        GetLocalTime (&(pDelBuff+dwDelBuffFreeIndex)->queue);

        dwDelBuffFreeCount--;
        dwDelBuffFreeIndex++;
        if (dwDelBuffFreeIndex == dwDelBuffSize)
            dwDelBuffFreeIndex = 0;          // wrap-
around if at end of buffer
    }
    else
        // No free buffers. Return an error, which indicates that
the delivery buffer is full.
        // Most likely, the number of delivery worker threads
needs to be increased to keep up
        // with the txn rate.
        bError = TRUE;
    LeaveCriticalSection(&DelBuffCriticalSection);

    if (!bError)
        // increment worker semaphore to wake up a worker thread
        ReleaseSemaphore( hWorkerSemaphore, 1, NULL );

    return bError;
}

/* FUNCTION: ProcessQueryString
*
* PURPOSE:   This function extracts the relevent information out of the
http command passed in from
*            the browser.
*
* COMMENTS:  If this is the initial connection i.e. client is at
welcome screen then
*            there will not be a terminal id or current
form id. If this is the case

```

```

*
*            then the pTermid and pFormid return values
are undefined.
*/

void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int *pCmd, int
*pFormId, int *pTermId, int *pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e. CMD=command
    static char *szCmds[] =
    {
        "Process", "..NewOrder..", "..Payment..", "..Delivery..",
"..Order-Status..", "..Stock-Level..",
        "..Exit..", "Submit", "Menu", "Clear", "Stats", ""
    };

    *pCmd = 0;          // default is the login screen
    *pTermId = 0;

    // if no params (i.e., empty query string), then return login
screen
    if (strlen(pECB->lpszQueryString) == 0)
        return;

    // parse FORMID, TERMID, and SYNCID
    *pFormId = GetIntKeyValue(&ptr, "FORMID", NO_ERR, NO_ERR);
    *pTermId = GetIntKeyValue(&ptr, "TERMID", NO_ERR, NO_ERR);
    *pSyncId = GetIntKeyValue(&ptr, "SYNCID", NO_ERR, NO_ERR);

    // parse CMD
    GetKeyValue(&ptr, "CMD", szBuffer, sizeof(szBuffer),
ERR_COMMAND_UNDEFINED);

    // see which command it matches
    for(i=0; ; i++)
    {
        if (szCmds[i][0] == 0)
            // no more; no match; return error
            throw new CWEBCLNT_ERR( ERR_COMMAND_UNDEFINED );
        if ( !strcmp(szCmds[i], szBuffer) )
        {
            *pCmd = i+1;
            break;
        }
    }

    /* FUNCTION: void WelcomeForm
    *
    */

```

```

void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this is first form client
    sees.
    strcpy( szBuffer, "<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"
Client (ver 4.20)</BIG></B> <BR> <BR>"
New\ "><PRE>"
"__TIME__" <BR>"
("__TIMESTAMP__") <BR>"
METHOD="GET">"
NAME="STATUSID" VALUE="0">"
NAME="ERROR" VALUE="0">"
NAME="FORMID" VALUE="1">"
NAME="TERMIN" VALUE="0">"
NAME="SYCID" VALUE="0">"
NAME="VERSION" VALUE="" WEBCLIENT_VERSION ">"
);

    sprintf( szTmp, "Configuration Settings: <BR><font
face="Courier New" color="blue"><PRE>"
"Txn Monitor =
"Database protocol =
"Max Connections =
"# of Delivery Threads =
"Max Pending Deliveries =
, szTxnMonNames [Reg.eTxnMon],
szDBNames [Reg.eDB_Protocol],
Reg.dwMaxConnections, dwNumDeliveryThreads,
dwDelBuffSize );
    strcat( szBuffer, szTmp);

    if (Reg.eTxnMon == COM)

```

```

{
    sprintf( szTmp, "COM Single Pool =
<B>%s</B><BR>",
    Reg.bCOM_SinglePool ? "YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>");

    if (Reg.eTxnMon == None)
        // connection options may be specified when not using a
    txn monitor
        sprintf( szTmp, "Please enter your database options
for this connection:<BR>"
"DB Server = <INPUT
NAME="db_server" SIZE=20 VALUE="%s"><BR>"
"DB User ID = <INPUT
NAME="db_user" SIZE=20 VALUE="%s"><BR>"
"DB Password = <INPUT
NAME="db_passwd" SIZE=20 VALUE="%s"><BR>"
"DB Name = <INPUT
NAME="db_name" SIZE=20 VALUE="%s"><BR>"
"DB Server =
, Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
    else
        // if using a txn monitor, connection options are
    determined from registry; can't
        // set per user. show options fyi
        sprintf( szTmp, "Database options which will be used
by the transaction monitor:<BR>"
"DB Server =
"DB User ID =
"DB Password =
"DB Name =
"DB Server =
, Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
    strcat( szBuffer, szTmp);

    sprintf( szTmp, "Please enter your Warehouse and District
for this session:<BR>"
"DB Server =
"DB User ID =
"DB Password =
"DB Name =
"DB Server =
, Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
    strcat( szBuffer, szTmp);

```



```

        strcat( szBuffer,      "Warehouse ID = <INPUT NAME=\"w_id\"
SIZE=4><BR>"
                "District ID = <INPUT
NAME=\"d_id\" SIZE=2><BR>"
                "</PRE></font><HR>"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Submit\">"
                "</FORM></BODY></HTML>");
    }

/* FUNCTION: SubmitCmd
 *
 * PURPOSE:   This function allocated a new terminal id in the Term
structure array.
 *
 */

void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int          iNewTerm;
    char        *ptr = pECB->lpszQueryString;

    char  szVersion[32]  = { 0 };
    char  szServer[32]   = { 0 };
    char  szUser[32]     = "sa";
    char  szPassword[32] = { 0 };
    char  szDatabase[32] = "tpcc";

    // validate version field; the version field ensures that the RTE
is synchronized with the web client
    GetKeyValue(&ptr, "VERSION", szVersion, sizeof(szVersion),
ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCLNT_ERR( ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server", szServer, sizeof(szServer),
ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user", szUser, sizeof(szUser),
NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd", szPassword,
sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name", szDatabase,
sizeof(szDatabase), NO_ERR);
    }

    // parse warehouse ID

```

```

        int w_id = GetIntKeyValue(&ptr, "w_id", ERR_HTML_ILL_FORMED,
ERR_W_ID_INVALID);
        if ( w_id < 1 )
            throw new CWEBCLNT_ERR( ERR_W_ID_INVALID );

        // parse district ID
        int d_id = GetIntKeyValue(&ptr, "d_id", ERR_HTML_ILL_FORMED,
ERR_D_ID_INVALID);
        if ( d_id < 1 || d_id > 10 )
            throw new CWEBCLNT_ERR( ERR_D_ID_INVALID );

        iNewTerm = TermAdd();

        Term.pClientData[iNewTerm].w_id = w_id;
        Term.pClientData[iNewTerm].d_id = d_id;

        try
        {
            if (Reg.eTxnMon == TUXEDO)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_TUXEDO_new();
            else if (Reg.eTxnMon == ENCINA)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_ENCINA_new();
            else if (Reg.eTxnMon == COM)
                Term.pClientData[iNewTerm].pTxn = pCTPCC_COM_new(
Reg.bCOM_SinglePool );
            else if (Reg.eDB_Protocol == ODBC)
                Term.pClientData[iNewTerm].pTxn = pCTPCC_ODBC_new(
szServer, szUser, szPassword, szMyComputerName, szDatabase );
            else if (Reg.eDB_Protocol == DBLIB)
                Term.pClientData[iNewTerm].pTxn = pCTPCC_DBLIB_new(
szServer, szUser, szPassword, szMyComputerName, szDatabase );
        }
        catch (...)
        {
            TermDelete(iNewTerm);
            throw; // pass exception upward
        }

        MakeMainMenuForm(iNewTerm, Term.pClientData[iNewTerm].iSyncId,
szBuffer);
    }

/* FUNCTION: StatsCmd
 *
 * PURPOSE:   This function returns to the browser the total number of
active terminal ids.
 *
 *           This routine is for development/debugging purposes.
 *
 */

```

```

void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int i;
    int    iTotal;

    EnterCriticalSection(&TermCriticalSection);

    iTotal = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            iTotal++;
    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,
        "<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>"
        "<BODY><B><BIG> Total Active Connections: %d
</BIG></B><BR></BODY></HTML>"
        , iTotal );
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        {
            ERR_COMMAND_UNDEFINED,
            "Command undefined."
        },
        {
            ERR_D_ID_INVALID,
            "Invalid District ID Must be 1 to 10."
        },
        {
            ERR_DELIVERY_CARRIER_ID_RANGE,
            "Delivery Carrier ID out of range must be 1 - 10."
        },
        {
            ERR_DELIVERY_CARRIER_INVALID,
            "Delivery Carrier ID invalid must be numeric 1 - 10."
        },
        {
            ERR_DELIVERY_MISSING_OCD_KEY,
            "Delivery missing Carrier ID key \"OCD*\"."
        },
        {
            ERR_DELIVERY_THREAD_FAILED,
            "Could not start delivery worker thread."
        },
        {
            ERR_GETPROCADDR_FAILED,
            "Could not map proc in DLL. GetProcAddr error. DLL="
        },
        {
            ERR_HTML_ILL_FORMED,
            "Required key field is missing from HTML string."
        },
    },
}

```

```

        {
            ERR_INVALID_SYNC_CONNECTION,
            "Invalid Terminal Sync ID."
        },
        {
            ERR_INVALID_TERMID,
            "Invalid Terminal ID."
        },
        {
            ERR_LOADDLL_FAILED,
            "Load of DLL failed. DLL="
        },
        {
            ERR_MAX_CONNECTIONS_EXCEEDED,
            "No connections available. Max Connections is probably too low."
        },
        {
            ERR_MISSING_REGISTRY_ENTRIES,
            "Required registry entries are missing. Rerun INSTALL to
correct."
        },
        {
            ERR_NEWORDER_CUSTOMER_INVALID,
            "New Order customer id invalid data type, range = 1 to 3000."
        },
        {
            ERR_NEWORDER_CUSTOMER_KEY,
            "New Order missing Customer key \"CID*\"."
        },
        {
            ERR_NEWORDER_DISTRICT_INVALID,
            "New Order District ID Invalid range 1 - 10."
        },
        {
            ERR_NEWORDER_FORM_MISSING_DID,
            "New Order missing District key \"DID*\"."
        },
        {
            ERR_NEWORDER_ITEMID_INVALID,
            "New Order Item Id is wrong data type, must be numeric."
        },
        {
            ERR_NEWORDER_ITEMID_RANGE,
            "New Order Item Id is out of range. Range = 1 to 999999."
        },
        {
            ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
            "New Order Item_Id field entered without a corresponding Supp_W."
        },
        {
            ERR_NEWORDER_MISSING_IID_KEY,
            "New Order missing Item Id key \"IID*\"."
        },
        {
            ERR_NEWORDER_MISSING_QTY_KEY,
            "New Order Missing Qty key \"Qty##*\"."
        },
        {
            ERR_NEWORDER_MISSING_SUPPW_KEY,
            "New Order missing Supp_W key \"SP##*\"."
        },
        {
            ERR_NEWORDER_NOITEMS_ENTERED,
            "New Order No order lines entered."
        },
        {
            ERR_NEWORDER_QTY_INVALID,
            "New Order Qty invalid must be numeric range 1 - 99."
        },
        {
            ERR_NEWORDER_QTY_RANGE,
            "New Order Qty is out of range. Range = 1 to 99."
        },
    },
}

```

```

    {
        ERR_NEWORDER_QTY_WITHOUT_SUPPW,
        "New Order Qty field entered without a corresponding Supp_W."
    },
    {
        ERR_NEWORDER_SUPPW_INVALID,
        "New Order Supp_W invalid data type must be numeric."
    },
    {
        ERR_NO_SERVER_SPECIFIED,
        "No Server name specified."
    },
    {
        ERR_ORDERSTATUS_CID_AND_CLT,
        "Order Status Only Customer ID or Last Name may be entered, not both."
    },
    {
        ERR_ORDERSTATUS_CID_INVALID,
        "Order Status Customer ID invalid, range must be numeric 1 - 3000."
    },
    {
        ERR_ORDERSTATUS_CLT_RANGE,
        "Order Status Customer last name longer than 16 characters."
    },
    {
        ERR_ORDERSTATUS_DID_INVALID,
        "Order Status District invalid, value must be numeric 1 - 10."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_CLT,
        "Order Status Either Customer ID or Last Name must be entered."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_KEY,
        "Order Status missing Customer key \"CID*\"."
    },
    {
        ERR_ORDERSTATUS_MISSING_CLT_KEY,
        "Order Status missing Customer Last Name key \"CLT*\"."
    },
    {
        ERR_ORDERSTATUS_MISSING_DID_KEY,
        "Order Status missing District key \"DID*\"."
    },
    {
        ERR_PAYMENT_CDI_INVALID,
        "Payment Customer district invalid must be numeric."
    },
    {
        ERR_PAYMENT_CID_AND_CLT,
        "Payment Only Customer ID or Last Name may be entered, not both."
    },
    {
        ERR_PAYMENT_CUSTOMER_INVALID,
        "Payment Customer data type invalid, must be numeric."
    },
    {
        ERR_PAYMENT_CWI_INVALID,
        "Payment Customer Warehouse invalid, must be numeric."
    },
    {
        ERR_PAYMENT_DISTRICT_INVALID,
        "Payment District ID is invalid, must be 1 - 10."
    },
    {
        ERR_PAYMENT_HAM_INVALID,
        "Payment Amount invalid data type must be numeric."
    },
    {
        ERR_PAYMENT_HAM_RANGE,
        "Payment Amount out of range, 0 - 9999.99."
    },
    {
        ERR_PAYMENT_LAST_NAME_TO_LONG,
        "Payment Customer last name longer than 16 characters."
    },

```

```

    {
        ERR_PAYMENT_MISSING_CDI_KEY,
        "Payment missing Customer district key \"CDI*\"."
    },
    {
        ERR_PAYMENT_MISSING_CID_CLT,
        "Payment Either Customer ID or Last Name must be entered."
    },
    {
        ERR_PAYMENT_MISSING_CID_KEY,
        "Payment missing Customer Key \"CID*\"."
    },
    {
        ERR_PAYMENT_MISSING_CLT_KEY,
        "Payment missing Customer Last Name key \"CLT*\"."
    },
    {
        ERR_PAYMENT_MISSING_CWI_KEY,
        "Payment missing Customer Warehouse key \"CWI*\"."
    },
    {
        ERR_PAYMENT_MISSING_DID_KEY,
        "Payment missing District Key \"DID*\"."
    },
    {
        ERR_PAYMENT_MISSING_HAM_KEY,
        "Payment missing Amount key \"HAM*\"."
    },
    {
        ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY, "Stock Level; missing Threshold key \"TT*\"."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_INVALID, "Stock Level; Threshold value must be in the range = 1 - 99."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_RANGE, "Stock Level Threshold out of range, range must be 1 - 99."
    },
    {
        ERR_VERSION_MISMATCH,
        "Invalid version field. RTE and Web Client are probably out of sync."
    },
    {
        ERR_W_ID_INVALID,
        "Invalid Warehouse ID."
    },
    {
        0, ""
    },
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown error number." );
        break;
    }
    if (m_Error == errorMsgs[i].iError)
    {
        strcpy( szTmp, errorMsgs[i].szMsg );
    }
}

```

```

        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    wsprintf( szTmp+strlen(szTmp), " Error=%d", m_SystemErr
);

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

/* FUNCTION: GetKeyValue
*
* PURPOSE: This function parses a http formatted string for specific
key values.
*
* ARGUMENTS: char *pQueryString http string from
client browser
*
* key value to look for char *pKey
*
* character array into which to place key's value char *pValue
*
* int iMax
*
* maximum length of key value array.
*
* WEBERROR err
*
* error value to throw
*
* RETURNS: nothing.
*
* ERROR: if (the pKey value is not found) then
*
* if (err == 0)
*
* return (empty string)
*
* else
*
* throw CWEBCLNT_ERR(err)
*
* COMMENTS: http keys are formatted either KEY=value& or KEY=value\0.
This DLL formats
*
* TPC-C input fields in such a manner that
the keys can be extracted in the
*
* above manner.
*/

void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax,
WEBERROR err)
{
    char *ptr;

```

```

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;

    iMax--; // one position is for terminating null
    while( *ptr && *ptr != '\0' && iMax)
    {
        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null

    *pQueryString = ptr;
    return;

ErrorExit:
    if (err != NO_ERR)
        throw new CWEBCLNT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
*
* PURPOSE: This function parses a http formatted string for a
specific key value.
*
* ARGUMENTS: char *pQueryString http string from
client browser
*
* key value to look for char *pKey
*
* WEBERROR NoKeyErr
*
* error value to throw if key not found
*
* WEBERROR NotIntErr
*
* error value to throw if value not numeric
*
* RETURNS: integer
*
* ERROR: if (the pKey value is not found) then
*
* if (NoKeyErr != NO_ERR)
*
* throw CWEBCLNT_ERR(err)
*
* else
*
* return 0
*
* else if (non-numeric char found) then
*
* if (NotIntErr != NO_ERR) then
*
* throw CWEBCLNT_ERR(err)
*
* else
*
* return 0
*
* COMMENTS: http keys are formatted either KEY=value& or KEY=value\0.
This DLL formats

```

```

*           TPC-C input fields in such a manner that
the keys can be extracted in the
*           above manner.
*/

int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR NoKeyErr,
WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;

    ptr0 = ptr;           // remember starting point
    // scan string until a terminator (null or &) or a non-digit
    while( *ptr && *ptr != '&' && isdigit(*ptr) )
        ptr++;

    // make sure we stopped scanning for the right reason
    if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
    {
        if (NotIntErr != NO_ERR)
            throw new CWEBCLNT_ERR( NoKeyErr );
        return 0;
    }

    *pQueryString = ptr;
    return atoi(ptr0);

ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWEBCLNT_ERR( NoKeyErr );
    return 0;
}

/* FUNCTION: TermInit
*
* PURPOSE:   This function initializes the client terminal structure;
it is called when the TPCC.DLL
*           is first loaded by the inet service.
*
*/

void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId    = 1;

```

```

Term.iNumEntries        = Reg.dwMaxConnections+1;

Term.pClientData        = NULL;
Term.pClientData        = (PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR( ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData, Term.iNumEntries *
sizeof(CLIENTDATA) );

    Term.iFreeList        = Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets set to -1, which marks
it as "in use".
    // This is intentional, as the zero entry is used as an
anchor and never
    // allocated as an actual terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree = i-1;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
*
* PURPOSE:   This function frees allocated resources associated with
the terminal structure.
*
* ARGUMENTS: none
*
* RETURNS:   None
*
* COMMENTS:  This function is called only when the inet service unloads
the TPCC.DLL
*
*/

void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            delete Term.pClientData[i].pTxn;
    }

    Term.iFreeList        = 0;
    Term.iNumEntries      = 0;

```

```

    if ( Term.pClientData )
        free(Term.pClientData);
    Term.pClientData = NULL;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermAdd
 *
 * PURPOSE: This function assigns a terminal id which is used to
identify a client browser.
 *
 * RETURNS: int assigned terminal id
 *
 */

int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList = Term.pClientData[iNewTerm].iNextFree;
        Term.pClientData[iNewTerm].iNextFree = -1; // indicates
this position is in use
    }
    else
    {
        // no open slots, so find the slot that hasn't been used
in the longest
time and reuse it
        for(iNewTerm=1, i=1, iTickCount=0x7FFFFFFF;
i<Reg.dwMaxConnections; i++)
        {
            if (iTickCount > Term.pClientData[i].iTickCount)
            {
                iTickCount =
Term.pClientData[i].iTickCount;
                iNewTerm = i;
            }
        }
        // if oldest term is less than one minute old, it probably
means that more connections
// are being attempted than were specified as "Max
Connections" at install. In this case,
// do not bump existing connection; instead, return error
to requester.
        if ((GetTickCount() - iTickCount) < 60000)
        {

```

```

                LeaveCriticalSection(&TermCriticalSection);
                throw new CWEBCLNT_ERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
            }
        }

        Term.pClientData[iNewTerm].iTickCount = GetTickCount();
        Term.pClientData[iNewTerm].iSyncId = Term.iMasterSyncId++;
        Term.pClientData[iNewTerm].pTxn = NULL;

        LeaveCriticalSection(&TermCriticalSection);
        return iNewTerm;
    }

/* FUNCTION: TermDelete
 *
 * PURPOSE: This function makes a terminal entry in the Term array
available for reuse.
 *
 * ARGUMENTS: int id
Terminal id of client exiting
 *
 */

void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;

        // put onto free list
        EnterCriticalSection(&TermCriticalSection);

        Term.pClientData[id].iNextFree = Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
 */

void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int iErrorNum,
int iTermId, int iSyncId, char *szErrorText, char *szBuffer )
{
    wsprintf(szBuffer,
"<HTML><HEAD><TITLE>TPC-C Error</TITLE></HEAD><BODY>"
"<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
"<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">"
"<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"%d\">"
"<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"

```

```

        "<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
        "<BOLD>An Error Occurred</BOLD><BR><BR>"
        "%s"
        "<BR><BR><HR>"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" "
VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" "
VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" "
VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-
Status..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock-
Level..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</FORM></BODY></HTML>"
        , iType, iErrorNum, MAIN_MENU_FORM, iTermId, iSyncId,
szErrorText );
}

/* FUNCTION: MakeMainMenuForm
*/

void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm)
{
    wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Main Menu</TITLE></HEAD><BODY>"
        "Select Desired Transaction.<BR><HR>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" "
VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" "
VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" "
VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-
Status..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock-
Level..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</FORM></BODY></HTML>"
        , MAIN_MENU_FORM, iTermId, iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*
* PURPOSE: This function constructs the Stock Level HTML page.

```

```

*
* COMMENTS: The internal client buffer is created when the terminal id
is assigned and should not
*
* be freed except when the client terminal id
is no longer needed.
*/

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA *pStockLevelData,
BOOL bInput, char *szForm)
{
    int c;

    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Stock Level</TITLE></HEAD><FORM
ACTION=\"tpcc.dll\" METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">"
Stock-Level<BR>"
        "Warehouse: %4.4d District: %2.2d<BR> <BR>",
        STOCK_LEVEL_FORM, iTermId,
        Term.pClientData[iTermId].iSyncId,
        Term.pClientData[iTermId].w_id,
        Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
            "Stock Level Threshold: <INPUT NAME=\"TT*\" "
SIZE=2><BR> <BR>"
            "low stock: </font><BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR>"
            " <BR> <BR> <BR> <BR> <BR> <BR> <BR></PRE><HR>"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\" "
VALUE=\"Process\">"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\" "
VALUE=\"Menu\">"
            "</FORM></HTML>" );
    }
    else
    {
        wsprintf(szForm+c,
            "Stock Level Threshold: %2.2d<BR> <BR>"
            "low stock: %3.3d</font> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR>"
            " <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR></PRE><HR>"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\" "
VALUE=\"..NewOrder..\">"

```

```

        "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Order-Status..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Stock-Level..\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Exit..\">"
        "</FORM></HTML>"
        , pStockLevelData->threshold, pStockLevelData-
>low_stock);
    }
}

/* FUNCTION: MakeNewOrderForm
*
* COMMENTS: The internal client buffer is created when the terminal id
is assigned and should not
*
* be freed except when the client terminal id
is no longer needed.
*/

void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA *pNewOrderData, BOOL
bInput, char *szForm)
{
    int i, c;
    BOOL bValid;
    static char szBR[] = "<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>";

    if (!bInput)
        assert( pNewOrderData->exec_status_code == eOK ||
pNewOrderData->exec_status_code == eInvalidItem );

    bValid = (bInput || (pNewOrderData->exec_status_code == eOK));

    c = sprintf(szForm,
"<HTML><HEAD><TITLE>TPC-C New Order</TITLE></HEAD><BODY>"
"<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
"<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">"
"<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"
"<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
"<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
"<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
"<PRE><font face=\"Courier\">"
New Order<BR>"
, bValid ? 0 : ERR_BAD_ITEM_ID, NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

    if ( bInput )
    {

```

```

        c += sprintf(szForm+c, "Warehouse: %4.4d ",
Term.pClientData[iTermId].w_id );

        strcpy( szForm+c,
"District: <INPUT NAME=\"DID*\" SIZE=1>"
Date:<BR>"
"Customer: <INPUT NAME=\"CID*\" SIZE=4> Name:"
Credit: %Disc:<BR> <BR>"
"Order Number: Number of Lines:"
W_tax: D_tax:<BR> <BR>"
" Supp_W Item_Id Item Name Qty"
Stock B/G Price Amount<BR>"
" <INPUT NAME=\"SP00*\" SIZE=4> <INPUT
NAME=\"IID00*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP01*\" SIZE=4> <INPUT
NAME=\"IID01*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP02*\" SIZE=4> <INPUT
NAME=\"IID02*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP03*\" SIZE=4> <INPUT
NAME=\"IID03*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP04*\" SIZE=4> <INPUT
NAME=\"IID04*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP05*\" SIZE=4> <INPUT
NAME=\"IID05*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP06*\" SIZE=4> <INPUT
NAME=\"IID06*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP07*\" SIZE=4> <INPUT
NAME=\"IID07*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP08*\" SIZE=4> <INPUT
NAME=\"IID08*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP09*\" SIZE=4> <INPUT
NAME=\"IID09*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP10*\" SIZE=4> <INPUT
NAME=\"IID10*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP11*\" SIZE=4> <INPUT
NAME=\"IID11*\" SIZE=6> <INPUT
SIZE=1><BR>"
" <INPUT NAME=\"SP12*\" SIZE=4> <INPUT
NAME=\"IID12*\" SIZE=6> <INPUT
SIZE=1><BR>"

```



```

NAME=\ "IID13*\ " SIZE=6> <INPUT NAME=\ "SP13*\ " SIZE=4> <INPUT
SIZE=1><BR>" <INPUT NAME=\ "Qty13*\ "
NAME=\ "IID14*\ " SIZE=6> <INPUT NAME=\ "SP14*\ " SIZE=4> <INPUT
SIZE=1><BR>" <INPUT NAME=\ "Qty14*\ "
"Execution Status:
Total:<BR>" </font></PRE><HR>"
VALUE=\ "Process\ ">" <INPUT TYPE=\ "submit\ " NAME=\ "CMD\ "
VALUE=\ "Menu\ ">" <INPUT TYPE=\ "submit\ " NAME=\ "CMD\ "
" </FORM></HTML>"
}
else
{
c += sprintf(szForm+c, "Warehouse: %4.4d District:
%2.2d Date: ",
pNewOrderData->w_id,
pNewOrderData->d_id);
if ( bValid )
{
c += sprintf(szForm+c, "%2.2d-%2.2d-%4.4d
%2.2d:%2.2d:%2.2d",
pNewOrderData->o_entry_d.day,
pNewOrderData->o_entry_d.month,
pNewOrderData->o_entry_d.year,
pNewOrderData->o_entry_d.hour,
pNewOrderData->o_entry_d.minute,
pNewOrderData->o_entry_d.second);
}
c += sprintf(szForm+c, "<BR>Customer: %4.4d Name: %-
16s Credit: %-2s ",
pNewOrderData->c_id, pNewOrderData->c_last,
pNewOrderData->c_credit);
if ( bValid )
{
c += sprintf(szForm+c,
"Order Number: %8.8d Number
of Lines: %2.2d W_tax: %5.2f D_tax: %5.2f <BR> <BR>"
" Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>",
100.0*pNewOrderData->c_discount,
pNewOrderData->o_id,
pNewOrderData->o_ol_cnt,
100.0 * pNewOrderData->w_tax,

```

```

100.0 * pNewOrderData->d_tax);
for(i=0; i<pNewOrderData->o_ol_cnt; i++)
{
c += sprintf(szForm+c, " %4.4d %6.6d
%-24s %2.2d %3.3d %1.1s $%6.2f $%7.2f <BR>",
pNewOrderData->OL[i].ol_supply_w_id,
pNewOrderData->OL[i].ol_i_id,
pNewOrderData->OL[i].ol_i_name,
pNewOrderData->OL[i].ol_quantity,
pNewOrderData->OL[i].ol_stock,
pNewOrderData->OL[i].ol_brand_generic,
pNewOrderData->OL[i].ol_i_price,
pNewOrderData->OL[i].ol_amount );
}
}
else
{
c += sprintf(szForm+c,
"%Disc:<BR>"
"Order Number: %8.8d Number of Lines:
W_tax: D_tax:<BR> <BR>"
" Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>"
, pNewOrderData->o_id);
i = 0;
}
strncpy( szForm+c, szBR, (15-i)*5 );
c += (15-i)*5;
if ( bValid )
c += sprintf(szForm+c, "Execution Status:
Transaction committed. Total: $%8.2f ",
pNewOrderData->total_amount);
else
c += sprintf(szForm+c, "Execution Status: Item
number is not valid. Total:");
strcpy(szForm+c,
" <BR></font></PRE><HR>"
" <INPUT TYPE=\ "submit\ " NAME=\ "CMD\ "
VALUE=\ "..NewOrder..\ ">"
" <INPUT TYPE=\ "submit\ " NAME=\ "CMD\ "
VALUE=\ "..Payment..\ ">"
" <INPUT TYPE=\ "submit\ " NAME=\ "CMD\ "
VALUE=\ "..Delivery..\ ">"
" <INPUT TYPE=\ "submit\ " NAME=\ "CMD\ "
VALUE=\ "..Order-Status..\ ">"
" <INPUT TYPE=\ "submit\ " NAME=\ "CMD\ "
VALUE=\ "..Stock-Level..\ ">"

```

```

VALUE="\..Exit..\ ">"<INPUT TYPE="\submit\" NAME="\CMD\"
" </FORM></HTML>"
);
}
}
/* FUNCTION: MakePaymentForm
*
* COMMENTS: The internal client buffer is created when the terminal id
is assigned and should not
*
* be freed except when the client terminal id
is no longer needed.
*/

void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData, BOOL
bInput, char *szForm)
{
    int c;

    c = sprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Payment</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">"
        Payment<BR>"
        "Date: "
        , PAYMENT_FORM, iTermId,
        Term.pClientData[iTermId].iSyncId);

    if ( !bInput )
    {
        c += sprintf(szForm+c, "%2.2d-%2.2d-%4.4d
%2.2d:%2.2d:%2.2d",
            pPaymentData->h_date.day,
            pPaymentData->h_date.month,
            pPaymentData->h_date.year,
            pPaymentData->h_date.hour,
            pPaymentData->h_date.minute,
            pPaymentData->h_date.second);
    }

    if ( bInput )
    {
        c += sprintf(szForm+c,
            "<BR> <BR>Warehouse: %4.4d"
            " District: <INPUT
NAME=\"DID*\" SIZE=1><BR> <BR> <BR> <BR> <BR> <BR>"
            "Customer: <INPUT NAME=\"CID*\" SIZE=4>"

```

```

" Cust-Warehouse: <INPUT NAME=\"CWI*\" SIZE=4> "
" Cust-District: <INPUT NAME=\"CDI*\" SIZE=1><BR>"
" Name: <INPUT NAME=\"CLT*\"
SIZE=16> Since:<BR>"
"
Credit:<BR>"
"
Disc:<BR>"
"
Phone:<BR> <BR>"
"Amount Paid: $<INPUT NAME=\"HAM*\"
SIZE=7> New Cust-Balance:<BR>"
"Credit Limit:<BR> <BR>Cust-Data: <BR> <BR> <BR>
<BR> <BR></font></PRE><HR>"
" <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Process\"><INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
" </BODY></FORM></HTML>"
, Term.pClientData[iTermId].w_id);
}
else
{
    c += sprintf(szForm+c,
        "<BR> <BR>Warehouse: %4.4d
District: %2.2d<BR>"
        "%-20s %-20s<BR>"
        "%-20s %-20s<BR>"
        "%-20s %-2s %5.5s-%4.4s %-20s %-2s %5.5s-
%4.4s<BR> <BR>"
        "Customer: %4.4d Cust-Warehouse: %4.4d Cust-
District: %2.2d<BR>"
        "Name: %-16s %-2s %-16s Since: %2.2d-%2.2d-
%4.4d<BR>"
        " %-20s Credit: %-
2s<BR>"
        , Term.pClientData[iTermId].w_id, pPaymentData-
>d_id
        , pPaymentData->w_street_1, pPaymentData-
>d_street_1
        , pPaymentData->w_street_2, pPaymentData-
>d_street_2
        , pPaymentData->w_city, pPaymentData->w_state,
pPaymentData->w_zip, pPaymentData->w_zip+5
        , pPaymentData->d_city, pPaymentData->d_state,
pPaymentData->d_zip, pPaymentData->d_zip+5
        , pPaymentData->c_id, pPaymentData->c_w_id,
pPaymentData->c_d_id
        , pPaymentData->c_first, pPaymentData->c_middle,
pPaymentData->c_last
        , pPaymentData->c_since.day, pPaymentData-
>c_since.month,
        pPaymentData->c_since.year
        , pPaymentData->c_street_1, pPaymentData->c_credit
);
}

```

```

        c += sprintf(szForm+c,
                    "          %-20s          %%Disc:
%5.2f<BR>",
                    pPaymentData->c_street_2, 100.0*pPaymentData-
>c_discount);

        c += wsprintf(szForm+c,
                    "          %-20s %-2s %5.5s-%4.4s          Phone:
%6.6s-%3.3s-%3.3s-%4.4s<BR> <BR>",
                    pPaymentData->c_city, pPaymentData->c_state,
pPaymentData->c_zip, pPaymentData->c_zip+5,
                    pPaymentData->c_phone, pPaymentData->c_phone+6,
pPaymentData->c_phone+9, pPaymentData->c_phone+12 );

        c += sprintf(szForm+c,
                    "Amount Paid:          $%7.2f          New Cust-
Balance: $%14.2f<BR>"
                    "Credit Limit:  $%13.2f<BR> <BR>"
                    , pPaymentData->h_amount, pPaymentData->c_balance
                    , pPaymentData->c_credit_lim
                    );

        if ( pPaymentData->c_credit[0] == 'B' && pPaymentData-
>c_credit[1] == 'C' )
            c += wsprintf(szForm+c,
                    "Cust-Data: %50.50s<BR>
%-50.50s<BR>          %-50.50s<BR>",
                    pPaymentData->c_data, pPaymentData-
>c_data+50, pPaymentData->c_data+100, pPaymentData->c_data+150 );
            else
                strcpy(szForm+c, "Cust-Data: <BR> <BR> <BR> <BR>");

            strcat(szForm, " <BR></font></PRE><HR>"
                    " <INPUT TYPE=\submit\"
NAME=\CMD\" VALUE=\..NewOrder..\>"
                    " <INPUT TYPE=\submit\"
NAME=\CMD\" VALUE=\..Payment..\>"
                    " <INPUT TYPE=\submit\"
NAME=\CMD\" VALUE=\..Delivery..\>"
                    " <INPUT TYPE=\submit\"
NAME=\CMD\" VALUE=\..Order-Status..\>"
                    " <INPUT TYPE=\submit\"
NAME=\CMD\" VALUE=\..Stock-Level..\>"
                    " <INPUT TYPE=\submit\"
NAME=\CMD\" VALUE=\..Exit..\>"
                    "</BODY></FORM></HTML>");
        }
}

/* FUNCTION: MakeOrderStatusForm
*

```

```

* COMMENTS:  The internal client buffer is created when the terminal id
is assigned and should not
*
*              be freed except when the client terminal id
is no longer needed.
*/

void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA
*pOrderStatusData, BOOL bInput, char *szForm)
{
    int          i, c;
    static char szBR[] = " <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>";

    c = wsprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C Order-
Status</TITLE></HEAD><BODY>"
                "<FORM ACTION=\tpcc.dll\" METHOD=\GET\">"
                "<INPUT TYPE=\hidden\" NAME=\STATUSID\" VALUE=\0\">"
                "<INPUT TYPE=\hidden\" NAME=\ERROR\" VALUE=\0\">"
                "<INPUT TYPE=\hidden\" NAME=\FORMID\" VALUE=\%d\">"
                "<INPUT TYPE=\hidden\" NAME=\TERMINID\" VALUE=\%d\">"
                "<INPUT TYPE=\hidden\" NAME=\SYNCID\" VALUE=\%d\">"
                "<PRE><font face=\Courier\">
Order-Status<BR>"
                "Warehouse: %4.4d          ",
                ORDER_STATUS_FORM, iTermId,
                Term.pClientData[iTermId].iSyncId, Term.pClientData[iTermId].w_id);

    if ( bInput )
    {
        strcpy(szForm+c,
                "District: <INPUT NAME=\DID*\" SIZE=1><BR>"
                "Customer: <INPUT NAME=\CID*\" SIZE=4\" Name:
<INPUT NAME=\CLT*\" SIZE=23><BR>"
                "Cust-Balance:<BR> <BR>"
                "Order-Number:          Entry-Date:
Carrier-Number:<BR>"
                "Supply-W          Item-Id          Qty          Amount
Delivery-Date<BR> <BR> <BR> <BR>"
                " <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR></font></PRE>"
                "<HR><INPUT TYPE=\submit\" NAME=\CMD\"
VALUE=\Process\"><INPUT TYPE=\submit\" NAME=\CMD\" VALUE=\Menu\">"
                "</BODY></FORM></HTML>");
    }
    else
    {
        c += wsprintf(szForm+c,
                    "District: %2.2d<BR>"
                    "Customer: %4.4d          Name: %16s %-2s %16s<BR>",
                    pOrderStatusData->d_id, pOrderStatusData->c_id,
                    pOrderStatusData->c_first, pOrderStatusData-
>c_middle, pOrderStatusData->c_last);
    }
}

```

```

        c += sprintf(szForm+c, "Cust-Balance: $%9.2f<BR> <BR>",
            pOrderStatusData->c_balance);

        c += wsprintf(szForm+c,
            "Order-Number: %8.8d  Entry-Date: %2.2d-%2.2d-
%4.4d %2.2d:%2.2d:%2.2d  Carrier-Number: %2.2d<BR>"
            "Supply-W      Item-Id  Qty      Amount
Delivery-Date<BR>",
            pOrderStatusData->o_id,
            pOrderStatusData->o_entry_d.day,
            pOrderStatusData->o_entry_d.month,
            pOrderStatusData->o_entry_d.year,
            pOrderStatusData->o_entry_d.hour,
            pOrderStatusData->o_entry_d.minute,
            pOrderStatusData->o_entry_d.second,
            pOrderStatusData->o_carrier_id);

        for(i=0; i< pOrderStatusData->o_ol_cnt; i++)
        {
            c += sprintf(szForm+c, " %4.4d      %6.6d
%2.2d      $%8.2f      %2.2d-%2.2d-%4.4d<BR>",
                pOrderStatusData->OL[i].ol_supply_w_id,
                pOrderStatusData->OL[i].ol_i_id,
                pOrderStatusData->OL[i].ol_quantity,
                pOrderStatusData->OL[i].ol_amount,
                pOrderStatusData->OL[i].ol_delivery_d.day,
                pOrderStatusData->OL[i].ol_delivery_d.month,
                pOrderStatusData->OL[i].ol_delivery_d.year);
        }

        strncpy( szForm+c, szBR, (15-i)*5 );
        c += (15-i)*5;

        strcpy(szForm+c,
            "</font></PRE><HR><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Payment..\">"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Delivery..\">"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Order-Status..\">"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Stock-Level..\">"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Exit..\">"
            "</BODY></FORM></HTML>" );
    }
}

```

```

/* FUNCTION: MakeDeliveryForm
 *
 * COMMENTS:  The internal client buffer is created when the terminal id
is assigned and should not
 *
 *              be freed except when the client terminal id
is no longer needed.
 */

void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData, BOOL
bInput, char *szForm)
{
    int    c;

    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Delivery</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">"
        Delivery<BR>"
        "Warehouse: %4.4d<BR> <BR>",
        (!bInput && (pDeliveryData->exec_status_code != eOK)) ?
        ERR_TYPE_DELIVERY_POST : 0,
        DELIVERY_FORM, iTermId, Term.pClientData[iTermId].iSyncId,
        Term.pClientData[iTermId].w_id);

    if ( bInput )
    {
        strcpy( szForm+c,
            "Carrier Number: <INPUT NAME=\"OCD*\" SIZE=1><BR>
<BR>"
            "Execution Status: <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>"
            " <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
</font></PRE><HR>"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Process\">"
            "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Menu\">"
            "</BODY></FORM></HTML>" );
    }
    else
    {
        wsprintf( szForm+c,
            "Carrier Number: %2.2d<BR> <BR>"
            "Execution Status: %s <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>"
            " <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
</font></PRE>"

```

```

                "<HR><INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..NewOrder..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Payment..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Delivery..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Order-Status..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Stock-Level..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Exit..\">"
                "</BODY></FORM></HTML>"
                , pDeliveryData->o_carrier_id,
                (pDeliveryData->exec_status_code == eOK) ?
"Delivery has been queued." : "Delivery Post Failed "
                );
        }
/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE: This function gets and validates the input data from the
new order form
*
* filling in the required input variables. it then
calls the SQLNewOrder
*
* transaction, constructs the output form and writes
it back to client
*
* browser.
*/
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId,
char *szBuffer)
{
    PNEW_ORDER_DATA pNewOrder;

    pNewOrder = Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();

    ZeroMemory(pNewOrder, sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id = Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString, pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder = Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder, OUTPUT_FORM, szBuffer);
}
/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE: This function gets and validates the input data from the
payment form

```

```

*
* filling in the required input variables. It then
calls the SQLPayment
*
* transaction, constructs the output form and writes
it back to client
*
* browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB passed in structure
pointer from inetsrv.
*
* int
* iTermId client browser terminal id
*/
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)
{
    PPAYMENT_DATA pPayment;

    pPayment = Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id = Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString, pPayment);

    Term.pClientData[iTermId].pTxn->Payment();

    pPayment = Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment, OUTPUT_FORM, szBuffer);
}
/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE: This function gets and validates the input data from the
Order Status
*
* form filling in the required input variables. It
then calls the
*
* SQLOrderStatus transaction, constructs the output
form and writes it
*
* back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB passed in structure
pointer from inetsrv.
*
* int
* iTermId client browser terminal id
*/
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId,
char *szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;

    pOrderStatus = Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();

```

```

ZeroMemory(pOrderStatus, sizeof(ORDER_STATUS_DATA));
pOrderStatus->w_id = Term.pClientData[iTermId].w_id;
GetOrderStatusData(pECB->lpszQueryString, pOrderStatus);

Term.pClientData[iTermId].pTxn->OrderStatus();

pOrderStatus = Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
MakeOrderStatusForm(iTermId, pOrderStatus, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE: This function gets and validates the input data from the
delivery form
*           filling in the required input variables. It then
calls the PostDeliveryInfo
*           Api, The client is then informed that the
transaction has been posted.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB passed in structure
pointer from inetsrv.
*           int
*           iTermId client browser terminal id
*/

void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)
{
    char *ptr = pECB->lpszQueryString;

    PDELIVERY_DATA pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
    ZeroMemory(pDelivery, sizeof(DELIVERY_DATA));
    pDelivery->w_id = Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id = GetIntKeyValue(&ptr, "OCD*",
ERR_DELIVERY_MISSING_OCD_KEY, ERR_DELIVERY_CARRIER_INVALID);
    if ( pDelivery->o_carrier_id > 10 || pDelivery->o_carrier_id < 1 )
        throw new CWEBCLNT_ERR( ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery->w_id, pDelivery-
>o_carrier_id) )
            pDelivery->exec_status_code = eDeliveryFailed;
        else
            pDelivery->exec_status_code = eOK;
    }
}

```

```

else // delivery is done synchronously if no delivery threads
configured
    Term.pClientData[iTermId].pTxn->Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
*
* PURPOSE: This function gets and validates the input data from the
Stock Level
*           form filling in the required input variables. It
then calls the
*           SQLStockLevel transaction, constructs the output
form and writes it
*           back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB passed in structure
pointer from inetsrv.
*           int
*           iTermId client browser terminal id
*/

void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId,
char *szBuffer)
{
    char *ptr = pECB->lpszQueryString;

    PSTOCK_LEVEL_DATA pStockLevel;

    pStockLevel = Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel, sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id = Term.pClientData[iTermId].w_id;
    pStockLevel->d_id = Term.pClientData[iTermId].d_id;

    pStockLevel->threshold = GetIntKeyValue(&ptr, "TT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY, ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ( pStockLevel->threshold >= 100 || pStockLevel->threshold < 0 )
        throw new CWEBCLNT_ERR( ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn->StockLevel();

    pStockLevel = Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
*

```

```

* PURPOSE:   This function extracts and validates the new order form
data from an http command string.
*
* ARGUMENTS: LPSTR          lpszQueryString      client
browser http command string
*
*           NEW_ORDER_DATA *pNewOrderData
*           pointer to new order data structure
*/

void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA
*pNewOrderData)
{
    char    szTmp[26];
    int     i;
    short   items;
    int     ol_i_id, ol_quantity;
    char    *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6] =
    { "SP00*", "SP01*", "SP02*", "SP03*", "SP04*",
      "SP05*", "SP06*", "SP07*", "SP08*", "SP09*",
      "SP10*", "SP11*", "SP12*", "SP13*", "SP14*" };
    static char szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "IID00*", "IID01*", "IID02*", "IID03*", "IID04*",
      "IID05*", "IID06*", "IID07*", "IID08*", "IID09*",
      "IID10*", "IID11*", "IID12*", "IID13*", "IID14*" };
    static char szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "Qty00*", "Qty01*", "Qty02*", "Qty03*", "Qty04*",
      "Qty05*", "Qty06*", "Qty07*", "Qty08*", "Qty09*",
      "Qty10*", "Qty11*", "Qty12*", "Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_NEWORDER_FORM_MISSING_DID, ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr, "CID*",
ERR_NEWORDER_CUSTOMER_KEY, ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS; i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp) )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData->OL[items].ol_supply_w_id =
(short)atoi( szTmp );

            ol_i_id = pNewOrderData->OL[items].ol_i_id =
                GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY, ERR_NEWORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999 || ol_i_id < 1 )

```

```

                throw new CWEBCLNT_ERR(
ERR_NEWORDER_ITEMID_RANGE );
            ol_quantity = pNewOrderData->OL[items].ol_quantity
=
                GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY, ERR_NEWORDER_QTY_INVALID);
            if ( ol_quantity > 99 || ol_quantity < 1 )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_QTY_RANGE );

            items++;
        }
        else
        { // nothing entered for supply warehouse, so item id
and qty must also be blank
            GetKeyValue(&ptr, szIID[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_IID_KEY);
            if ( szTmp[0] )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );

            GetKeyValue(&ptr, szQty[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_QTY_KEY);
            if ( szTmp[0] )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_QTY_WITHOUT_SUPPW );
        }
        if ( items == 0 )
            throw new CWEBCLNT_ERR( ERR_NEWORDER_NOITEMS_ENTERED );

        pNewOrderData->o_ol_cnt = items;
    }

/* FUNCTION: GetPaymentData
*
* PURPOSE:   This function extracts and validates the payment form data
from an http command string.
*
* ARGUMENTS: LPSTR          lpszQueryString      client
browser http command string
*
*           PAYMENT_DATA *pPaymentData
*           pointer to payment data structure
*/

void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA *pPaymentData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;
    BOOL    bCustIdBlank;

```

```

        pPaymentData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_PAYMENT_MISSING_DID_KEY, ERR_PAYMENT_DISTRICT_INVALID);

        GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CID_KEY);
        if ( szTmp[0] == 0 )
        {
            bCustIdBlank = TRUE;
            pPaymentData->c_id = 0;
        }
        else
        {
            // parse customer id and verify that last name was NOT
entered
            bCustIdBlank = FALSE;
            if ( !IsNumeric(szTmp) )
                throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
            pPaymentData->c_id = atoi(szTmp);
        }

        pPaymentData->c_w_id = GetIntKeyValue(&ptr, "CWI*",
ERR_PAYMENT_MISSING_CWI_KEY, ERR_PAYMENT_CWI_INVALID);
        pPaymentData->c_d_id = GetIntKeyValue(&ptr, "CDI*",
ERR_PAYMENT_MISSING_CDI_KEY, ERR_PAYMENT_CDI_INVALID);

        if ( bCustIdBlank )
        {
            // customer id is blank, so last name must be entered
            GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
            if ( szTmp[0] == 0 )
                throw new CWEBCLNT_ERR( ERR_PAYMENT_MISSING_CID_CLT
);

            _strupr( szTmp );
            if ( strlen(pPaymentData->c_last) > LAST_NAME_LEN )
                throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );
            strcpy(pPaymentData->c_last, szTmp);
        }
        else
        {
            // parse customer id and verify that last name was NOT
entered
            GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
            if ( szTmp[0] != 0 )
                throw new CWEBCLNT_ERR( ERR_PAYMENT_CID_AND_CLT );
        }

        GetKeyValue(&ptr, "HAM*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_HAM_KEY);
        if (!IsDecimal(szTmp))
            throw new CWEBCLNT_ERR( ERR_PAYMENT_HAM_INVALID );
        pPaymentData->h_amount = atof(szTmp);

```

```

        if ( pPaymentData->h_amount >= 10000.00 || pPaymentData->h_amount
< 0 )
            throw new CWEBCLNT_ERR( ERR_PAYMENT_HAM_RANGE );
    }

/* FUNCTION: GetOrderStatusData
 *
 * PURPOSE:   This function extracts and validates the payment form data
from an http command string.
 *
 */
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA
*pOrderStatusData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;

    pOrderStatusData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY, ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(pOrderStatusData->c_last) > LAST_NAME_LEN )
            throw new CWEBCLNT_ERR( ERR_ORDERSTATUS_CLT_RANGE
);
        strcpy(pOrderStatusData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was NOT
entered
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR( ERR_ORDERSTATUS_CID_INVALID
);

        pOrderStatusData->c_id = atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCLNT_ERR( ERR_ORDERSTATUS_CID_AND_CLT
);
    }
}

```



```

/* FUNCTION: BOOL IsNumeric(char *ptr)
*
* PURPOSE: This function determines if a string is numeric. It fails
if any characters other
*           than numeric and null terminator are present.
*
* ARGUMENTS: char *ptr pointer to string to check.
*
* RETURNS: BOOL FALSE if string is not all numeric
*           TRUE if string contains
only numeric characters i.e. '0' - '9'
*/

```

```

BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

```

```

/* FUNCTION: BOOL IsDecimal(char *ptr)
*
* PURPOSE: This function determines if a string is a non-negative
decimal value.
*           It fails if any characters other than a series of numbers
followed by
*           a decimal point, another series of numbers, and a
null terminator are present.
*
* ARGUMENTS: char *ptr pointer to string to check.
*
* RETURNS: BOOL FALSE if string is not a valid non-
negative decimal value
*           TRUE if string is OK
*/

```

```

BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if (dotptr == NULL)
        // no decimal point, so just check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace decimal with a terminator

```

```

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if (*(dotptr+1) == 0)
        return FALSE; // nothing but a decimal point is bad
    else
        bValid = TRUE;

    if (*(dotptr+1) != 0)
        // check text after decimal point
        bValid &= IsNumeric(dotptr+1);

    *dotptr = '.'; // replace decimal point
    return bValid;
}

```

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1 101

```

```

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

```

/* FILE: READREGISTRY.CPP
* Microsoft TPC-C Kit Ver. 4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
*
* not yet audited
*
* PURPOSE: Implementation for TPC-C Tuxedo class.
* Contact: Charles Levine (clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/

```

```

/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE: This function reads the NT registry for startup
parameters. There parameters are

```

```

*           under the TPCC key.
*
* RETURNS   FALSE = no errors
*           TRUE  = error reading registry
*/
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg )
{
    HKEY   hKey;
    DWORD  size;
    DWORD  type;
    DWORD  dwTmp;
    char   szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE, "SOFTWARE\\Microsoft\\TPCC",
0, KEY_READ, &hKey) != ERROR_SUCCESS )
        return TRUE;

    // determine database protocol to use; may be either ODBC or DBLIB
    pReg->eDB_Protocol = Unspecified;
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "DB_Protocol", 0, &type, (BYTE
*)&szTmp, &size) == ERROR_SUCCESS )
    {
        if ( !strcmp(szTmp, szDBNames[ODBC]) )
            pReg->eDB_Protocol = ODBC;
        else if ( !strcmp(szTmp, szDBNames[DBLIB]) )
            pReg->eDB_Protocol = DBLIB;
    }

    pReg->eTxnMon = None;
    // determine txn monitor to use; may be either TUXEDO, or blank
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "TxnMonitor", 0, &type, (BYTE *)&szTmp,
&size) == ERROR_SUCCESS )
    {
        if ( !strcmp(szTmp, szTxnMonNames[TUXEDO]) )
            pReg->eTxnMon = TUXEDO;
        else if ( !strcmp(szTmp, szTxnMonNames[ENCINA]) )
            pReg->eTxnMon = ENCINA;
        else if ( !strcmp(szTmp, szTxnMonNames[COM]) )
            pReg->eTxnMon = COM;
    }

    pReg->bCOM_SinglePool = FALSE;
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "COM_SinglePool", 0, &type, (BYTE
*)&szTmp, &size) == ERROR_SUCCESS )
    {
        if ( !strcmp(szTmp, "YES") )
            pReg->bCOM_SinglePool = TRUE;
    }

    pReg->dwMaxConnections = 0;

```

```

    size = sizeof(dwTmp);
    if ( ( RegQueryValueEx(hKey, "MaxConnections", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
        && (type == REG_DWORD) )
        pReg->dwMaxConnections = dwTmp;

    pReg->dwMaxPendingDeliveries = 0;
    size = sizeof(dwTmp);
    if ( ( RegQueryValueEx(hKey, "MaxPendingDeliveries", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
        && (type == REG_DWORD) )
        pReg->dwMaxPendingDeliveries = dwTmp;

    pReg->dwNumberOfDeliveryThreads = 0;
    size = sizeof(dwTmp);
    if ( ( RegQueryValueEx(hKey, "NumberOfDeliveryThreads", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
        && (type == REG_DWORD) )
        pReg->dwNumberOfDeliveryThreads = dwTmp;

    size = sizeof( pReg->szPath );
    if ( RegQueryValueEx(hKey, "Path", 0, &type, (BYTE *)&pReg-
>szPath, &size) != ERROR_SUCCESS )
        pReg->szPath[0] = 0;

    size = sizeof( pReg->szDbServer );
    if ( RegQueryValueEx(hKey, "DbServer", 0, &type, (BYTE *)&pReg-
>szDbServer, &size) != ERROR_SUCCESS )
        pReg->szDbServer[0] = 0;

    size = sizeof( pReg->szDbName );
    if ( RegQueryValueEx(hKey, "DbName", 0, &type, (BYTE *)&pReg-
>szDbName, &size) != ERROR_SUCCESS )
        pReg->szDbName[0] = 0;

    size = sizeof( pReg->szDbUser );
    if ( RegQueryValueEx(hKey, "DbUser", 0, &type, (BYTE *)&pReg-
>szDbUser, &size) != ERROR_SUCCESS )
        pReg->szDbUser[0] = 0;

    size = sizeof( pReg->szDbPassword );
    if ( RegQueryValueEx(hKey, "DbPassword", 0, &type, (BYTE *)&pReg-
>szDbPassword, &size) != ERROR_SUCCESS )
        pReg->szDbPassword[0] = 0;

    RegCloseKey(hKey);

    return FALSE;
}

/*   FILE:           ReadRegistry.h
*                               Microsoft TPC-C Kit Ver. 4.20.000
*                               Copyright Microsoft, 1999
*/

```

```

*           All Rights Reserved
*
*           not audited
*
*   PURPOSE:      Header for registry related code.
*
*   Change history:
*       4.20.000 - first version
*/

enum DBPROTOCOL { Unspecified, ODBC, DBLIB };
const char *szDBNames[] = { "Unspecified", "ODBC", "DBLIB" };

enum TXNMON { None, TUXEDO, ENCINA, COM };
const char *szTxnMonNames[] = { "NONE", "TUXEDO", "ENCINA", "COM" };

//This structure defines the data necessary to keep distinct for each
terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbServer[32];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg );

/*   FILE:           ERROR.H
*
*           Microsoft TPC-C Kit Ver. 4.20.000
*           Copyright Microsoft, 1999
*
*           All Rights Reserved
*
*           Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
*
*   PURPOSE:      Header file for error exception classes.
*
*   Change history:
*       4.20.000 - updated rev number to match kit
*/

#pragma once

#ifndef _INC_STRING
#include <string.h>

```

```

#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int          iError;                //error id of message
    char        szMsg[256];            //message to sent to browser
} SERRORMSG;

#define ERR_FATAL_LEVEL          1
#define ERR_WARNING_LEVEL       2
#define ERR_INFORMATION_LEVEL  3

#define ERR_TYPE_LOGIC          -1
//logic error in program; internal error
#define ERR_SUCCESS              0
//success (a non-error error)
#define ERR_BAD_ITEM_ID         1
//expected abort record in txnRecord
#define ERR_TYPE_DELIVERY_POST  2
//expected delivery post failed
#define ERR_TYPE_WEBDLL         3
//tpcc web generated error
#define ERR_TYPE_SQL            4
//sql server generated error
#define ERR_TYPE_DBLIB          5
//dblib generated error
#define ERR_TYPE_ODBC           6
//odbc generated error
#define ERR_TYPE_SOCKET         7
//error on communication socket client rte only
#define ERR_TYPE_DEADLOCK       8
//dblib and odbc only deadlock condition
#define ERR_TYPE_COM            9
//error from COM call
#define ERR_TYPE_TUXEDO         10
//tuxedo error
#define ERR_TYPE_OS             11
//operating system error
#define ERR_TYPE_MEMORY         12
//memory allocation error
#define ERR_TYPE_TPCC_ODBC      13
//error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB     14
//error from tpcc dblib txn module
#define ERR_TYPE_DELISRV        15
//delivery server error

```

```

#define ERR_TYPE_TXNLOG
    16 //txn log error
#define ERR_TYPE_BCCONN
    17 //Benchcraft connection class
#define ERR_TYPE_TPCC_CONN
    18 //Benchcraft connection class
#define ERR_TYPE_ENCINA
    19 //Encina error
#define ERR_TYPE_COMPONENT
    20 //error from COM component

class CBaseErr
{
public:
    char *m_szApp;
    char *m_szMsg;
    char *m_szLoc; // code location where the error occurred
    int m_idMsg;

    CBaseErr(void)
    {
        m_idMsg = 0;
        m_szMsg = new char[m_szMsg_size];
        m_szApp = new char[m_szApp_size];
        m_szLoc = NULL;

        m_szMsg[0] = 0;
        m_szApp[0] = 0;

        GetModuleFileName(GetModuleHandle(NULL), m_szApp,
m_szApp_size);
    }

    ~CBaseErr(void)
    {
        if (m_szMsg)
            delete [] m_szMsg;
        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };

    CBaseErr(int idMsg)
    {
        m_idMsg = idMsg;
        m_szApp = new char[m_szApp_size];
        m_szMsg = new char[m_szMsg_size];
        m_szLoc = NULL;

        GetModuleFileName(GetModuleHandle(NULL), m_szApp,
m_szApp_size);

```

```

        LoadString(GetModuleHandle(NULL), idMsg, m_szMsg,
m_szMsg_size);
    }

    CBaseErr(LPCTSTR szMsg)
    {
        m_idMsg = 0;
        m_szApp = new char[m_szApp_size];
        m_szMsg = new char[m_szMsg_size];
        m_szLoc = NULL;

        GetModuleFileName(GetModuleHandle(NULL), m_szApp,
m_szApp_size);
        strcpy(m_szMsg, szMsg);
    }

    void SetError(char *szMsg, LPCTSTR szLocation)
    {
        if (szMsg != NULL)
            strcpy(m_szMsg, szMsg);
        else
            m_szMsg[0] = 0;

        if (szLocation != NULL)
        {
            delete [] m_szLoc;
            m_szLoc = new char[strlen(szLocation)+1];
            strcpy(m_szLoc, szLocation);
        }
        else
        {
            delete [] m_szLoc;
            m_szLoc = NULL;
        }
    }

    virtual void Draw(HWND hwnd, LPCTSTR szStr = NULL)
    {
        int j;
        char szTmp[512];

        if (szStr)
            j = wsprintf(szTmp, "%s\n", szStr);
        if (m_szLoc)
            j += wsprintf(szTmp+j, "Location=%s\n", m_szLoc);
        if (m_szMsg)
            j += wsprintf(szTmp+j, "%s\n", m_szMsg);

        ::MessageBox(hwnd, szTmp, m_szApp, MB_OK);
    }

    char *GetApp(void) { return m_szApp; }
    char *GetMsg(void) { return m_szMsg; }

```

```

    char *GetLocation(void) { return m_szLoc; }

    virtual int ErrorType() = 0; // a value which distinguishes the
    kind of error that occurred
    virtual int ErrorNum() = 0; // an error value specific
    to the error type
    virtual char *ErrorText() = 0; // a string (i.e., human
    readable) representation of the error
};

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone,
        eSend,
        eSocket,
        eConnect
    };

    CSocketErr(Action eAction, LPCTSTR szLocation);
    CSocketErr(int iError) { m_errId = iError; };
    int m_errId;
    Action m_eAction;

    int ErrorType() { return ERR_TYPE_SOCKET;};
    int ErrorNum() { return m_errId;};
    char *ErrorText(void);
};

class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,

```

```

        eCreateNamedPipe,
        eConnectNamedPipe,
    };

    CSystemErr(Action eAction, LPCTSTR szLocation);

    void Draw(HWND hwnd, LPCTSTR szStr = NULL);

    int m_errId;
    Action m_eAction;

    int ErrorType() { return ERR_TYPE_OS;};
    int ErrorNum() { return m_errId;};
    char *ErrorText() { return "";} // TODO: need to code
error text
};

class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr(void);

    int ErrorType() { return ERR_TYPE_MEMORY;};
    int ErrorNum() { return 0;};
    char *ErrorText() { return "";} // TODO: need to code
error text
};

/* FILE: TRANS.H
 * Microsoft TPC-C Kit Ver. 4.20.000
 * Copyright Microsoft, 1999
 * All Rights Reserved
 *
 * Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C structure templates.
 *
 * Change history:
 * 4.20.000 - updated rev number to match kit
 */
#pragma once

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1

```

```

#define LAST_NAME_LEN          16
#define W_NAME_LEN             10
#define ADDRESS_LEN           20
#define STATE_LEN              2
#define ZIP_LEN                9
#define S_DIST_LEN            24
#define S_DATA_LEN            50
#define D_NAME_LEN            10
#define FIRST_NAME_LEN        16
#define MIDDLE_NAME_LEN       2
#define PHONE_LEN              16
#define DATETIME_LEN          30
#define CREDIT_LEN             2
#define C_DATA_LEN            250
#define H_DATA_LEN            24
#define DIST_INFO_LEN         24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN            25
#define OL_DIST_INFO_LEN      24

// TIMESTAMP_STRUCT is provided by the ODBC header file sqltypes.h, but
// is not available
// when compiling with dblink, so redefined here. Note: we are using the
// symbol "__SQLTYPES"
// (declared in sqltypes.h) as a way to determine if TIMESTAMP_STRUCT has
// been declared.
#ifndef __SQLTYPES
typedef struct
{
    short /* SQLSMALLINT */ year;
    unsigned short /* SQLUSMALLINT */ month;
    unsigned short /* SQLUSMALLINT */ day;
    unsigned short /* SQLUSMALLINT */ hour;
    unsigned short /* SQLUSMALLINT */ minute;
    unsigned short /* SQLUSMALLINT */ second;
    unsigned long /* SQLINTEGER */ fraction;
} TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after transaction completes
enum EXEC_STATUS
{
    eOK, // 0 "Transaction committed."
    eInvalidItem, // 1 "Item number is not valid."
    eDeliveryFailed // 2 "Delivery Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    short ol_supply_w_id;

```

```

    long ol_i_id;
    short ol_quantity;

    // output params
    char ol_i_name[I_NAME_LEN+1];
    char ol_brand_generic[BRAND_LEN+1];
    double ol_i_price;
    double ol_amount;
    short ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    short w_id;
    short d_id;
    long c_id;
    short o_ol_cnt;

    // output params
    EXEC_STATUS exec_status_code;
    char c_last[LAST_NAME_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_discount;
    double w_tax;
    double d_tax;
    long o_id;
    short o_commit_flag;
    TIMESTAMP_STRUCT o_entry_d;
    short o_all_local;
    double total_amount;
    OL_NEW_ORDER_DATA OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    short w_id;
    short d_id;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    char c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS exec_status_code;
    TIMESTAMP_STRUCT h_date;
    char w_street_1[ADDRESS_LEN+1];
    char w_street_2[ADDRESS_LEN+1];
    char w_city[ADDRESS_LEN+1];
    char w_state[STATE_LEN+1];
    char w_zip[ZIP_LEN+1];
    char d_street_1[ADDRESS_LEN+1];

```

```

char                d_street_2[ADDRESS_LEN+1];
char                d_city[ADDRESS_LEN+1];
char                d_state[STATE_LEN+1];
char                d_zip[ZIP_LEN+1];
char                c_first[FIRST_NAME_LEN+1];
char                c_middle[MIDDLE_NAME_LEN + 1];
char                c_street_1[ADDRESS_LEN+1];
char                c_street_2[ADDRESS_LEN+1];
char                c_city[ADDRESS_LEN+1];
char                c_state[STATE_LEN+1];
char                c_zip[ZIP_LEN+1];
char                c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT   c_since;
char                c_credit[CREDIT_LEN+1];
double             c_credit_lim;
double             c_discount;
double             c_balance;
char                c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long                ol_i_id;
    short              ol_supply_w_id;
    short              ol_quantity;
    double             ol_amount;
    TIMESTAMP_STRUCT   ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    // input params
    short              w_id;
    short              d_id;
    long               c_id;
    char               c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS        exec_status_code;
    char               c_first[FIRST_NAME_LEN+1];
    char               c_middle[MIDDLE_NAME_LEN+1];
    double             c_balance;
    long               o_id;
    TIMESTAMP_STRUCT   o_entry_d;
    short              o_carrier_id;
    OL_ORDER_STATUS_DATA ol[MAX_OL_ORDER_STATUS_ITEMS];
    short              o_ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    short              w_id;
    short              o_carrier_id;

```

```

    // output params
    EXEC_STATUS        exec_status_code;
    SYSTEMTIME         queue_time;
    long               o_id[10]; // id's of
delivered orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery transactions and for
writing them to the delivery server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME         queue; //time delivery transaction
    queued
    short              w_id; //delivery warehouse
    short              o_carrier_id; //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    short              w_id;
    short              d_id;
    short              threshold;

    // output params
    EXEC_STATUS        exec_status_code;
    long               low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

/* FILE: TXN_BASE.H
 * Microsoft TPC-C Kit Ver. 4.20.000
 * Copyright Microsoft, 1999
 * All Rights Reserved
 *
 * Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C txn class implementation.
 *
 * Change history:
 * 4.20.000 - updated rev number to match kit
 */

#pragma once

// need to declare functions for import, unless define has already been
created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_BASE

```

```

{
    public:
        CTPCC_BASE(void) {};
        virtual ~CTPCC_BASE(void) {};

        virtual PNEW_ORDER_DATA          BuffAddr_NewOrder()
        = 0;
        virtual PPAYMENT_DATA            BuffAddr_Payment()
        = 0;
        virtual PDELIVERY_DATA           BuffAddr_Delivery()
        = 0;
        virtual PSTOCK_LEVEL_DATA        BuffAddr_StockLevel() = 0;
        virtual PORDER_STATUS_DATA       BuffAddr_OrderStatus() = 0;

        virtual void NewOrder            () = 0;
        virtual void Payment              () = 0;
        virtual void Delivery             () = 0;
        virtual void StockLevel           () = 0;
        virtual void OrderStatus          () = 0;
};

/* FILE:          TPCC_DBLIB.CPP
 *               Microsoft TPC-C Kit Ver. 4.20.000
 *               Copyright Microsoft, 1999
 *               All Rights Reserved
 *
 *               Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
 *
 * PURPOSE:      Implements dblib calls for TPC-C txns.
 * Contact:      Charles Levine (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - updated rev number to match kit
 * 4.10.001 - not deleting error class in catch handler on
deadlock retry;
 *               not a functional bug, but a memory leak
 *               - had to tweak some declarations to
compile with latest SDK; no functional change
 */

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqlldb.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

```

```

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPCKSIZE          4096

// version string; must match return value from tpcc_version stored proc
const char    sVersion[] = "4.10.000";

const          iMaxRetries = 10;          // how many retries
on deadlock
static long    iConnectionCount = 0;    // number of current dblib
connections

BOOL WINAPI DllMain(HMODULE hModule, DWORD ul_reason_for_call, LPVOID
lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit();          // initialize dblib
            break;

        case DLL_PROCESS_DETACH:
            dbexit();          // close all dblib
structures/connections
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB          *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*) dbgetuserdata( dbproc );

    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity, dberr, oserr, dberrstr,
oserrstr );
    }
}

```



```

        return INT_CANCEL;
    }

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library SQL Server error messages
*
* ARGUMENTS: DBPROCESS *dbproc DBPROCESS id
pointer
*
* message number DBINT msgno
*
* message state int msgstate
*
* message severity int severity
*
* printable message description char *msgtext
*
* RETURNS: int INT_CONTINUE
continue if error is SQLETIME else INT_CANCEL action
*
* cancel operation INT_CANCEL
*
* COMMENTS: This function also sets the dead lock dbproc variable if
necessary.
*
*/

// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS, DBINT, INT, INT,
LPCSTR, LPCSTR, LPCSTR, DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity,
                LPCSTR msgtext, LPCSTR srvname, LPCSTR
procname, DBUSMALLINT line)
{
    CTPCC_DBLIB *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno, msgstate, severity, msgtext );
    }

    return 0;
}

/* FUNCTION: void UtilStrCpy(char * pDest, char * pSrc, int n)
*

```

```

* PURPOSE: This function copies n characters from string pSrc to pDst
and places a
*
* null character at the end of the destination
string.
*
* ARGUMENTS: char *pDest destination string pointer
*
* char *pSrc source string
pointer
*
* int n
*
* number of characters to copy
*
* RETURNS: None
*
* COMMENTS: Unlike strncpy this function ensures that the result
string is
*
* always null terminated.
*
*/

inline static void UtilStrCpy(char * pDest, const BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*
*/

char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION, "Wrong version of
stored procs on database server" },
        { ERR_INVALID_CUST, "Invalid Customer
id,name." },
        { ERR_NO_SUCH_ORDER, "No orders found for
customer." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno == errorMsgs[i].iError )

```

```

        break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer,          // name of SQL server
    LPCSTR szUser,           // user name for login
    LPCSTR szPassword,       // password for login
    LPCSTR szHost,          // workstation name; shows up in
sp_who; max 30 chars, only first 10 kept by SQL Server
    LPCSTR szDatabase )     // name of database to use
{
    return new CTPCC_DBLIB( szServer, szUser, szPassword, szHost,
szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer,          // name of SQL server
    LPCSTR szUser,           // user name for login
    LPCSTR szPassword,       // password for login
    LPCSTR szHost,          // workstation name; shows up in
sp_who; max 30 chars, only first 10 kept by SQL Server
    LPCSTR szDatabase )     // name of database to use
{
    LOGINREC      *login;
    const BYTE    *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

    m_MaxRetries = 10;          // how many retries on deadlock

    // increase max number of connections if getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5) )
    {
        if ( dbsetmaxprocs(iConnectionCount+10) == FAIL )
            ThrowError(CDBLIBERR::eDbSetMaxProcs);
    }

    // allocate a login structure
    login = dblogin();
    if (login == NULL)
        ThrowError(CDBLIBERR::eLogin);
    InterlockedIncrement( &iConnectionCount );

```

```

// register error and message handler functions
if (dbprocerrhandle(login, err_handler) == NULL)
    ThrowError(CDBLIBERR::eDbProcHandler);

if (dbprocmshandle(login, msg_handler) == NULL)
    ThrowError(CDBLIBERR::eDbProcHandler);

DBSETLUSER(login, szUser);
DBSETLPWD(login, szPassword);
DBSETLHOST(login, szHost);
DBSETLPACKET(login, (unsigned short)DEFCLPACKSIZE);
DBSETLVERSION(login, DBVER60);          // use dblib ver 6.0
client behavior

// set time to wait for login
if (dbsetlogintime(60) == FAIL)
    ThrowError(CDBLIBERR::eDbSet);

// set time to wait for statement execution
if (dbsettime(180) == FAIL)
    ThrowError(CDBLIBERR::eDbSet);

m_dbproc = dbopen(login, szServer);

// deallocate login structure before checking for success
dbfreelogin( login );

if (m_dbproc == NULL)
    ThrowError(CDBLIBERR::eDbOpen);

// save address of class instance so that the message and error
handler
// can get to data.
dbsetuserdata(m_dbproc, (LPVOID)this);

// Use the the right database
if (dbuse(m_dbproc, szDatabase) == FAIL)
    ThrowError(CDBLIBERR::eDbUse);

    dbcmd(m_dbproc, "set nocount on ");          // do not
return row counts
    dbcmd(m_dbproc, "set XACT_ABORT ON");       // rollback
transaction on abort

if (dbsqlexec(m_dbproc) == FAIL)
    ThrowError(CDBLIBERR::eDbSqlExec);

DiscardNextResults(2);

// verify that version of stored procs on server is correct
dbrpcinit(m_dbproc, "tpcc_version", 0);

```

```

if (dbrpcexec(m_dbproc) == FAIL)
    ThrowError(CDBLIBERR::eDbRpcExec);

if (dbresults(m_dbproc) != SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);

if (dbnextrow(m_dbproc) != REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

char szSrvVersion[16];
pData=dbdata(m_dbproc, 1);
if (pData)
    UtilStrCpy(szSrvVersion, pData, dbdatlen(m_dbproc, 1));
else
    szSrvVersion[0]=0;
if (strcmp(szSrvVersion,sVersion))
    throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

    DiscardNextRows(0);
    DiscardNextResults(0);
}

CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int dberr, int oserr,
LPCSTR dberrstr, LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

    if (dberrstr != NULL)
    {
        m_DbLibErr->m_dberrstr = new char[ strlen(dberrstr)+1 ];
        strcpy( m_DbLibErr->m_dberrstr, dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new char[ strlen(oserrstr)+1 ];
        strcpy( m_DbLibErr->m_oserrstr, oserrstr );
    }
}

```

```

}
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno, int msgstate, int
severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[ strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext, msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if yes, throw it and ignore
any DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLERR *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our pointer to instance;
catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to happen, since it means that
an error was returned
        // but the error handlers were not called.
        pDbLibErr = new CDBLIBERR(eAction);
    else
    {
        pDbLibErr = m_DbLibErr;
        pDbLibErr->m_eAction = eAction;
        m_DbLibErr = NULL; // clear our pointer to
instance; catch handler will delete
    }
}

```

```

        throw pDbLibErr;
    }

    // Read and discard rows until no more. Throw an exception if number of
    // rows read doesn't
    // match number of rows expected. The row count will be ignored if the
    // expected count value
    // passed in is negative. A typical use of this routine is to verify
    // that there are no more
    // rows to be read.
    void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
    {
        int          iRowsRead = 0;
        RETCODE rc;

        while (TRUE)
        {
            rc = dbnextrow(m_dbproc);
            if (rc == NO_MORE_ROWS)
                break;
            if (rc == FAIL)
            {
                if (iExpectedCount >= 0)
                    ThrowError(CDBLIBERR::eDbNextRow);
                else
                    break;
            }
            iRowsRead++;
        }

        if ((iExpectedCount >= 0) &&
            (iExpectedCount != iRowsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

    // Read and discard results until no more. Throw an exception if number
    // of result sets read doesn't
    // match number expected. The result set count will be ignored if the
    // expected count value
    // passed in is negative. A typical use of this routine is to verify
    // that there are no more
    // result sets to be read.
    void CTPCC_DBLIB::DiscardNextResults(int iExpectedCount)
    {
        int          iResultsRead = 0;
        RETCODE rc;

        while (TRUE)
        {
            rc = dbresults(m_dbproc);
            if (rc == NO_MORE_RESULTS)
                break;
            if (rc == FAIL)

```

```

        {
            if (iExpectedCount >= 0)
                ThrowError(CDBLIBERR::eDbResults);
            else
                break;
        }

        DiscardNextRows(-1);
        iResultsRead++;
    }

    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iResultsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

void CTPCC_DBLIB::StockLevel()
{
    int          iTryCount = 0;
    const BYTE   *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_stocklevel", 0);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1,
                (BYTE *) &m_txn.StockLevel.w_id); // @w_id smallint
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1,
                (BYTE *) &m_txn.StockLevel.d_id); // @d_id tinyint
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1,
                (BYTE *) &m_txn.StockLevel.threshold); // @threshold smallint

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc) != SUCCEEDED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (pData=dbdata(m_dbproc, 1))
                m_txn.StockLevel.low_stock = *((long *)
                pData);

            DiscardNextRows(0);
            DiscardNextResults(0);

            m_txn.StockLevel.exec_status_code = eOK;

```

```

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno != 1205) || (++iTryCount >
iMaxRetries))
            throw;

        // hit deadlock; backoff for increasingly longer
        period
            delete e;
            Sleep(10 * iTryCount);
    }
    // while (TRUE)
}

void CTPCC_DBLIB::NewOrder()
{
    int            i;
    DBINT         commit_flag;
    DBDATETIME    datetime;
    DBDATEREC     daterec;

    int            iTryCount = 0;
    const BYTE    *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_neworder", 0);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1,
(BYTE *) &m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1,
(BYTE *) &m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1,
(BYTE *) &m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1,
(BYTE *) &m_txn.NewOrder.o_ol_cnt);

            // check whether any order lines are for a remote
warehouse
            m_txn.NewOrder.o_all_local = 1;
            for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
            {
                if (m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
                    {

```

```

                    m_txn.NewOrder.o_all_local = 0; //
at least one remote warehouse
                    break;
                }
            }
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1,
(BYTE *) &m_txn.NewOrder.o_all_local);

            for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
            {
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
            }

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            // Get order line results
            m_txn.NewOrder.total_amount = 0;
            for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
            {
                if (dbresults(m_dbproc) != SUCCEED)
                    ThrowError(CDBLIBERR::eDbResults);

                if (dbnumcols(m_dbproc) != 5)

                    ThrowError(CDBLIBERR::eWrongNumCols);

                if (dbnextrow(m_dbproc) != REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);

                if (pData=dbdata(m_dbproc, 1))

                    UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name, pData,
dbdatlen(m_dbproc, 1));

                if (pData=dbdata(m_dbproc, 2))
                    m_txn.NewOrder.OL[i].ol_stock =
                    (* (DBSMALLINT *) pData);

                if (pData=dbdata(m_dbproc, 3))

                    UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_generic, pData,
dbdatlen(m_dbproc, 3));

                if (pData=dbdata(m_dbproc, 4))
                    dbconvert(m_dbproc, SQLNUMERIC,
pData, dbdatlen(m_dbproc,4),
                    SQLFLT8, (BYTE
                    *) &m_txn.NewOrder.OL[i].ol_i_price, 8);
            }
        }
    }
}

```

```

        if (pData=dbdata(m_dbproc, 5))
            dbconvert(m_dbproc, SQLNUMERIC,
                pData, dbdatlen(m_dbproc,5),
                    SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

        m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount + m_txn.NewOrder.OL[i].ol_amount;

        DiscardNextRows(0);
    }

    // get remaining values for w_tax, d_tax, o_id,
c_last, c_discount, c_credit, o_entry_d, commit_flag
    if (dbresults(m_dbproc) != SUCCEED)
        ThrowError(CDBLIBERR::eDbResults);

    if (dbnextrow(m_dbproc) != REG_ROW)
        ThrowError(CDBLIBERR::eDbNextRow);

    if (dbnumcols(m_dbproc) != 8)
        ThrowError(CDBLIBERR::eWrongNumCols);

    if (pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc, SQLNUMERIC, pData,
dbdatlen(m_dbproc,1), SQLFLT8, (BYTE *)&m_txn.NewOrder.w_tax, 8);
        if (pData=dbdata(m_dbproc, 2))

            dbconvert(m_dbproc, SQLNUMERIC, pData,
dbdatlen(m_dbproc,2), SQLFLT8, (BYTE *)&m_txn.NewOrder.d_tax, 8);
            if (pData=dbdata(m_dbproc, 3))
                m_txn.NewOrder.o_id = (*(DBINT *) pData);
            if (pData=dbdata(m_dbproc, 4))
                UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
            if (pData=dbdata(m_dbproc, 5))
                dbconvert(m_dbproc, SQLNUMERIC, pData,
dbdatlen(m_dbproc,5), SQLFLT8, (BYTE *)&m_txn.NewOrder.c_discount, 8);
            if (pData=dbdata(m_dbproc, 6))
                UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
            if (pData=dbdata(m_dbproc, 7))
            {
                datetime = (*(DBDATETIME *) pData);
                dbdatecrack(m_dbproc, &daterec, &datetime);
                m_txn.NewOrder.o_entry_d.year =
daterec.year;
                m_txn.NewOrder.o_entry_d.month =
daterec.month;

```

```

        m_txn.NewOrder.o_entry_d.day =
daterec.day;
        m_txn.NewOrder.o_entry_d.hour =
daterec.hour;
        m_txn.NewOrder.o_entry_d.minute =
daterec.minute;
        m_txn.NewOrder.o_entry_d.second =
daterec.second;
    }
    if (pData=dbdata(m_dbproc, 8))
        commit_flag = *(DBTINYINT *) pData);

    DiscardNextRows(0);
    DiscardNextResults(0);

    if (commit_flag == 1)
    {
        m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));
        m_txn.NewOrder.exec_status_code = eOK;
    }
    else
        m_txn.NewOrder.exec_status_code =
eInvalidItem;

    return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno != 1205) || (++iTryCount >
iMaxRetries))
        throw;

    // hit deadlock; backoff for increasingly longer
    period
        delete e;
        Sleep(10 * iTryCount);
}
} // while (TRUE)

void CTPCC_DBLIB::Payment ()
{
    DBDATETIME    datetime;
    DBDATEREC     daterec;

    int            iTryCount = 0;
    const BYTE     *pData;

    ResetError();

```

```

while (TRUE)
{
    try
    {
        dbrpcinit(m_dbproc, "tpcc_payment", 0);

        dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1,
(BYTE *) &m_txn.Payment.w_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1,
(BYTE *) &m_txn.Payment.c_w_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLFLT8, -1, -1,
(BYTE *) &m_txn.Payment.h_amount);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1,
(BYTE *) &m_txn.Payment.d_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1,
(BYTE *) &m_txn.Payment.c_d_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1,
(BYTE *) &m_txn.Payment.c_id);

        // if customer id is zero, then payment is by name
        if (m_txn.Payment.c_id == 0)
            dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char *)m_txn.Payment.c_last);

        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc) != 27)
            ThrowError(CDBLIBERR::eWrongNumCols);

        if (pData=dbdata(m_dbproc, 1))
            m_txn.Payment.c_id = *((DBINT *) pData);
        if (pData=dbdata(m_dbproc, 2))
            UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));
        if (pData=dbdata(m_dbproc, 3))
        {
            datetime = *((DBDATETIME *) pData);
            dbdatecrack(m_dbproc, &daterec, &datetime);
            m_txn.Payment.h_date.year = daterec.year;
            m_txn.Payment.h_date.month =

daterec.month;

            m_txn.Payment.h_date.day = daterec.day;
            m_txn.Payment.h_date.hour = daterec.hour;
            m_txn.Payment.h_date.minute =

daterec.minute;

```

```

        m_txn.Payment.h_date.second =

daterec.second;
        }
        if (pData=dbdata(m_dbproc, 4))
            UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
        if (pData=dbdata(m_dbproc, 5))
            UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
        if (pData=dbdata(m_dbproc, 6))
            UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
        if (pData=dbdata(m_dbproc, 7))
            UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));
        if (pData=dbdata(m_dbproc, 8))
            UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
        if (pData=dbdata(m_dbproc, 9))
            UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
        if (pData=dbdata(m_dbproc, 10))
            UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
        if (pData=dbdata(m_dbproc, 11))
            UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
        if (pData=dbdata(m_dbproc, 12))
            UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
        if (pData=dbdata(m_dbproc, 13))
            UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
        if (pData=dbdata(m_dbproc, 14))
            UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));
        if (pData=dbdata(m_dbproc, 15))
            UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
        if (pData=dbdata(m_dbproc, 16))
            UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
        if (pData=dbdata(m_dbproc, 17))
            UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
        if (pData=dbdata(m_dbproc, 18))
            UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
        if (pData=dbdata(m_dbproc, 19))
            UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
        if (pData=dbdata(m_dbproc, 20))

```

```

        UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
        if (pData=dbdata(m_dbproc, 21))
            UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
        if (pData=dbdata(m_dbproc, 22))
        {
            datetime = *((DBDATETIME *) pData);
            dbdatecrack(m_dbproc, &daterec, &datetime);
            m_txn.Payment.c_since.year =
                m_txn.Payment.c_since.month =
                m_txn.Payment.c_since.day = daterec.day;
            m_txn.Payment.c_since.hour =
                m_txn.Payment.c_since.minute =
                m_txn.Payment.c_since.second =
        }
        if(pData=dbdata(m_dbproc, 23))
            UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
        if(pData=dbdata(m_dbproc, 24))
            dbconvert(m_dbproc, SQLNUMERIC, pData,
dbdatlen(m_dbproc,24), SQLFLT8, (BYTE *)&m_txn.Payment.c_credit_lim, 8);
        if(pData=dbdata(m_dbproc, 25))
            dbconvert(m_dbproc, SQLNUMERIC, pData,
dbdatlen(m_dbproc,25), SQLFLT8, (BYTE *)&m_txn.Payment.c_discount, 8);
        if(pData=dbdata(m_dbproc, 26))
            dbconvert(m_dbproc, SQLNUMERIC, pData,
dbdatlen(m_dbproc,26), SQLFLT8, (BYTE *)&m_txn.Payment.c_balance, 8);
        if(pData=dbdata(m_dbproc, 27))
            UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (m_txn.Payment.c_id == 0)
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else
            m_txn.Payment.exec_status_code = eOK;

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno != 1205) || (++iTryCount >
iMaxRetries))

```

```

        throw;
        // hit deadlock; backoff for increasingly longer
        delete e;
        Sleep(10 * iTryCount);
    }
} // while (TRUE)

void CTPCC_DBLIB::OrderStatus()
{
    int i;
    DBDATETIME datetime;
    DBDATEREC daterec;

    int iTryCount = 0;
    RETCODE rc;
    const BYTE *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_orderstatus", 0);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1,
(BYTE *) &m_txn.OrderStatus.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1,
(BYTE *) &m_txn.OrderStatus.d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1, -1,
(BYTE *) &m_txn.OrderStatus.c_id);

            // if customer id is zero, then order status is by
            name
                if (m_txn.OrderStatus.c_id == 0)
                    dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            // Get order lines
            if (dbresults(m_dbproc) != SUCCEED)
            {
                if ((m_DbLibErr == NULL) && (m_SqlErr ==
NULL))

```



```

                throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
                else
                    ThrowError(CDBLIBERR::eDbResults);
            }

            if (dbnumcols(m_dbproc) != 5)
                ThrowError(CDBLIBERR::eWrongNumCols);

            i = 0;
            while (TRUE)
            {
                rc = dbnextrow(m_dbproc);
                if (rc == NO_MORE_ROWS)
                    break;
                if (rc != REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);

                if (pData=dbdata(m_dbproc, 1))

                    m_txn.OrderStatus.OL[i].ol_supply_w_id = (*(DBSMALLINT *) pData);
                if (pData=dbdata(m_dbproc, 2))
                    m_txn.OrderStatus.OL[i].ol_i_id =
                    (*(DBINT *) pData);
                if (pData=dbdata(m_dbproc, 3))
                    m_txn.OrderStatus.OL[i].ol_quantity
                    = (*(DBSMALLINT *) pData);
                if (pData=dbdata(m_dbproc, 4))
                    dbconvert(m_dbproc, SQLNUMERIC,
                    pData, dbdatlen(m_dbproc,4),
                    SQLFLT8, (BYTE
                    *)&m_txn.OrderStatus.OL[i].ol_amount, 8);
                if (pData=dbdata(m_dbproc, 5))
                {
                    datetime = (*(DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec,
                    &datetime);

                    m_txn.OrderStatus.OL[i].ol_delivery_d.year   = daterec.year;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.month = daterec.month;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.day   = daterec.day;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.hour   = daterec.hour;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.minute = daterec.minute;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.second = daterec.second;
                }
                i++;
            }
            m_txn.OrderStatus.o_ol_cnt = i;

```

```

                if (dbresults(m_dbproc) != SUCCEED)
                    ThrowError(CDBLIBERR::eDbResults);

                if (dbnextrow(m_dbproc) != REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);

                if (dbnumcols(m_dbproc) != 8)
                    ThrowError(CDBLIBERR::eWrongNumCols);

                if (pData=dbdata(m_dbproc, 1))
                    m_txn.OrderStatus.c_id = (*(DBINT *)
                pData);
                if (pData=dbdata(m_dbproc, 2))
                    UtilStrCpy(m_txn.OrderStatus.c_last, pData,
                dbdatlen(m_dbproc,2));
                if (pData=dbdata(m_dbproc, 3))
                    UtilStrCpy(m_txn.OrderStatus.c_first,
                pData, dbdatlen(m_dbproc,3));
                if (pData=dbdata(m_dbproc, 4))
                    UtilStrCpy(m_txn.OrderStatus.c_middle,
                pData, dbdatlen(m_dbproc, 4));
                if (pData=dbdata(m_dbproc, 5))
                {
                    datetime = (*(DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.OrderStatus.o_entry_d.year   =
                    daterec.year;
                    m_txn.OrderStatus.o_entry_d.month =
                    daterec.month;
                    m_txn.OrderStatus.o_entry_d.day   =
                    daterec.day;
                    m_txn.OrderStatus.o_entry_d.hour   =
                    daterec.hour;
                    m_txn.OrderStatus.o_entry_d.minute =
                    daterec.minute;
                    m_txn.OrderStatus.o_entry_d.second =
                    daterec.second;
                }
                if (pData=dbdata(m_dbproc, 6))
                    m_txn.OrderStatus.o_carrier_id =
                (*(DBSMALLINT *) pData);
                if (pData=dbdata(m_dbproc, 7))
                    dbconvert(m_dbproc, SQLNUMERIC, pData,
                dbdatlen(m_dbproc,7),
                    SQLFLT8, (BYTE
                *)&m_txn.OrderStatus.c_balance, 8);
                if (pData=dbdata(m_dbproc, 8))
                    m_txn.OrderStatus.o_id = (*(DBINT *)
                pData);

                DiscardNextRows(0);

```

```

        DiscardNextResults(0);

        if (m_txn.OrderStatus.o_ol_cnt == 0)
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
        else if (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else
            m_txn.OrderStatus.exec_status_code = eOK;

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno != 1205) || (++iTryCount >
iMaxRetries))
            throw;

        // hit deadlock; backoff for increasingly longer
        period
            delete e;
            Sleep(10 * iTryCount);
    }
    // while (TRUE)
}

void CTPCC_DBLIB::Delivery()
{
    int            i;
    int            iTryCount = 0;
    const BYTE    *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_delivery", 0);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1, -1,
(BYTE *) &m_txn.Delivery.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -1, -1,
(BYTE *) &m_txn.Delivery.o_carrier_id);

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc) != SUCCEED)

```

```

                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc) != 10)
                ThrowError(CDBLIBERR::eWrongNumCols);

            for (i=0; i<10; i++)
            {
                if (pData = dbdata(m_dbproc, i+1))
                    m_txn.Delivery.o_id[i] = *((DBINT
*)pData);
            }

            DiscardNextRows(0);
            DiscardNextResults(0);

            m_txn.Delivery.exec_status_code = eOK;
            return;
        }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno != 1205) || (++iTryCount >
iMaxRetries))
                throw;

            // hit deadlock; backoff for increasingly longer
            period
                delete e;
                Sleep(10 * iTryCount);
        }
        // while (TRUE)
    }

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }

    return;
}

/*   FILE:            TPCC_DBLIB.H
*                               Microsoft TPC-C Kit Ver. 4.20.000

```

```

*           Copyright Microsoft, 1999
*           All Rights Reserved
*
*           Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
*
*           PURPOSE:      Header file for TPC-C txn class implementation.
*
* Change history:
*           4.20.000 - updated rev number to match kit
*/
#pragma once

#ifndef PDBPROCESS
#define DBPROCESS void // dbprocess structure type
typedef DBPROCESS * PDBPROCESS;
#endif

// need to declare functions for import, unless define has already been
// created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CSQLERR : public CBaseErr
{
public:
    CSQLERR(void)
    {
        m_msgno = 0;
        m_msgstate = 0;
        m_severity = 0;
        m_msgtext = NULL;
    };

    ~CSQLERR()
    {
        delete [] m_msgtext;
    };

    int m_msgno;
    int m_msgstate;
    int m_severity;
    char *m_msgtext;

    int ErrorType() {return ERR_TYPE_SQL;};
    int ErrorNum() {return m_msgno;};
    char *ErrorText() {return m_msgtext;};
};

```

```

class CDBLIBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eLogin, // error from dblogin
        eDbOpen, // error from dbopen
        eDbUse, // error from dbuse
        eDbSqlExec, // error from
        dbsublexec
        eDbSet, // error from one of
        the dbset* routines
        eDbNextRow, // error from
        dbnextrow
        eWrongRowCount, // more or less rows
        returned than expected
        eWrongNumCols, // more or less columns
        returned than expected
        eDbResults, // error from
        dbresults
        eDbRpcExec, // error from
        dbrpcexec
        eDbSetMaxProcs, // error from
        dbsetmaxprocs
        eDbProcHandler // error from either
        dbprocerrhandle or dbprocmsghandle
    };

    CDBLIBERR(ACTION eAction, int severity = 0, int dberror =
0, int oserr = 0)
    {
        m_eAction = eAction;
        m_severity = severity;
        m_dberror = dberror;
        m_oserr = oserr;

        m_dberrstr = NULL;
        m_oserrstr = NULL;
    };

    ~CDBLIBERR()
    {
        delete [] m_dberrstr;
        delete [] m_oserrstr;
    };

    ACTION m_eAction;
    int m_severity;
    int m_dberror;
    int m_oserr;
    char *m_dberrstr;
};

```

```

char *m_oserrstr;

int ErrorType() {return ERR_TYPE_DBLIB;};
int ErrorNum() {return m_dberror;};
char *ErrorText() {return m_dberrstr;};

};

class CTPCC_DBLIB_ERR : public CBaseErr
{
public:
enum CTPCC_DBLIB_ERRS
{
ERR_WRONG_SP_VERSION = 1, // "Wrong version of
stored procs on database server"
ERR_INVALID_CUST, // "Invalid
Customer id,name."
ERR_NO_SUCH_ORDER // "No orders
found for customer."
};

CTPCC_DBLIB_ERR( int iErr ) { m_errno = iErr; };

int m_errno;

int ErrorType() {return ERR_TYPE_TPCC_DBLIB;};
int ErrorNum() {return m_errno;};

char *ErrorText();
};

class DllDecl CTPCC_DBLIB : public CTPCC_BASE
{
private:
// declare variables and private functions here...
PDBPROCESS m_dbproc;
CDBLIBERR *m_DbLibErr; // not allocated
until needed (maybe never)
CSQLERR *m_SqlErr; // not
allocated until needed (maybe never)
int m_MaxRetries; // retry
count on deadlock

void DiscardNextRows(int iExpectedCount);
void DiscardNextResults(int iExpectedCount);
void ThrowError( CDBLIBERR::ACTION eAction );
void ResetError();

union
{
NEW_ORDER_DATA NewOrder;
PAYMENT_DATA Payment;
DELIVERY_DATA Delivery;
};
};

```

```

STOCK_LEVEL_DATA StockLevel;
ORDER_STATUS_DATA OrderStatus;
}
m_txn;

public:
CTPCC_DBLIB(LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase );
~CTPCC_DBLIB(void);

inline PNEW_ORDER_DATA BuffAddr_NewOrder()
{ return &m_txn.NewOrder; };
inline PPAYMENT_DATA BuffAddr_Payment()
{ return &m_txn.Payment; };
inline PDELIVERY_DATA BuffAddr_Delivery()
{ return &m_txn.Delivery; };
inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel() {
return &m_txn.StockLevel; };
inline PORORDER_STATUS_DATA BuffAddr_OrderStatus() {
return &m_txn.OrderStatus; };

void NewOrder ();
void Payment ();
void Delivery ();
void StockLevel ();
void OrderStatus ();

// these are public because they must be called from the
dllib err_handler and msg_hangler
// outside of the class
void SetDbLibError(int severity, int dberr, int oserr,
LPCSTR dberrstr, LPCSTR oserrstr);
void SetSqlError( int msgno, int msgstate, int severity,
LPCSTR msgtext );
};

extern "C" DllDecl CTPCC_DBLIB* CTPCC_DBLIB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword, LPCSTR
szHost, LPCSTR szDatabase );

typedef CTPCC_DBLIB* (TYPE_CTPCC_DBLIB)(LPCSTR, LPCSTR, LPCSTR, LPCSTR,
LPCSTR);

/* FILE: TPCC_COM.CPP
* Microsoft TPC-C Kit Ver. 4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
*
* not yet audited
*
* PURPOSE: Source file for TPC-C COM+ class implementation.
* Contact: Charles Levine (clevine@microsoft.com)
*/

```

```

*
*   Change history:
*       4.20.000 - first version
*/

// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h" //tpckit transaction header
contains definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_com.h"

#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\tpcc_com_all\src\tpcc_com_all_i.c"

// wrapper routine for class constructor
_declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL bSinglePool)
{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;

    m_bSinglePool = bSinglePool;

    m_pNewOrder      = NULL;
    m_pPayment        = NULL;
    m_pStockLevel     = NULL;
    m_pOrderStatus    = NULL;

    m_pTxn = (COM_DATA*) CoTaskMemAlloc(sizeof(COM_DATA));
    if (!m_pTxn)
        throw new CCOMERR( E_FAIL );

    hr = CoInitializeEx(NULL, COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {

```

```

        hr = CoCreateInstance(CLSID_TPCC, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same component
        m_pPayment = m_pNewOrder;
        m_pStockLevel = m_pNewOrder;
        m_pOrderStatus = m_pNewOrder;
    }
    else
    {
        // use different components for each txn

        hr = CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = CoCreateInstance(CLSID_StockLevel, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pStockLevel);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pOrderStatus);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    // call setcomplete to release each component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pStockLevel->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

```

```

    }
}
CTPCC_COM::~CTPCC_COM()
{
    if ( m_pTxn )
        CoTaskMemFree( m_pTxn );

    ReleaseInterface( m_pNewOrder );
    if ( !m_bSinglePool )
    {
        ReleaseInterface( m_pPayment );
        ReleaseInterface( m_pStockLevel );
        ReleaseInterface( m_pOrderStatus );
    }
    CoUninitialize();
}

void CTPCC_COM::NewOrder()
{
    int iSize = sizeof( COM_DATA );

    HRESULT hr = m_pNewOrder->NewOrder( &iSize, ( unsigned
char**) &m_pTxn );
    if ( FAILED( hr ) )
        throw new CCOMERR( hr );

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}

void CTPCC_COM::Payment()
{
    int iSize = sizeof( COM_DATA );

    HRESULT hr = m_pPayment->Payment( &iSize, ( unsigned
char**) &m_pTxn );
    if ( FAILED( hr ) )
        throw new CCOMERR( hr );

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}

void CTPCC_COM::StockLevel()
{
    int iSize = sizeof( COM_DATA );

    HRESULT hr = m_pStockLevel->StockLevel( &iSize, ( unsigned
char**) &m_pTxn );
    if ( FAILED( hr ) )
        throw new CCOMERR( hr );
}

```

```

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}

void CTPCC_COM::OrderStatus()
{
    int iSize = sizeof( COM_DATA );

    HRESULT hr = m_pOrderStatus->OrderStatus( &iSize, ( unsigned
char**) &m_pTxn );
    if ( FAILED( hr ) )
        throw new CCOMERR( hr );

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType, m_pTxn->error );
}

/*
FILE:          TPCC_COM.H
*              Microsoft TPC-C Kit Ver. 4.20.000
*              Copyright Microsoft, 1999
*              All Rights Reserved
*
*              not yet audited
*
PURPOSE:       Header file for TPC-C COM+ class implementation.
*
Change history:
*              4.20.000 - first version
*/

#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless define has already been
// created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CCOMERR : public CBaseErr
{
private:
    char m_szErrorText[64];

public:
    // use this interface for genuine COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
    }
}

```

```

        m_iError = 0;
    }

    // use this interface to impersonate a non-COM error type
    CCOMERR( int iErrorType, int iError )
    {
        m_iErrorType = iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int          m_hr;
    int          m_iErrorType;
    int          m_iError;

    // A CCOMERR class can impersonate another class, which
    happens if the error
    // was not actually a COM Services error, but was simply
    transmitted back via COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return ERR_TYPE_COM;
        else
            return m_iErrorType;
    }

    int ErrorNum() {return m_hr;}

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf( m_szErrorText, "Error: Class %d,
error # %d", m_iErrorType, m_iError );
        else
            sprintf( m_szErrorText, "Error: COM HRESULT
%x", m_hr );
        return m_szErrorText;
    }
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC*      m_pNewOrder;
    ITPCC*      m_pPayment;
    ITPCC*      m_pStockLevel;
    ITPCC*      m_pOrderStatus;

    struct COM_DATA

```

```

    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA      NewOrder;
            PAYMENT_DATA         Payment;
            DELIVERY_DATA        Delivery;
            STOCK_LEVEL_DATA     StockLevel;
            ORDER_STATUS_DATA    OrderStatus;
        } u;
    } *m_pTxn;

public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA      BuffAddr_NewOrder()
    { return &m_pTxn->u.NewOrder; };
    inline PPAYMENT_DATA        BuffAddr_Payment()
    { return &m_pTxn->u.Payment; };
    inline PDELIVERY_DATA       BuffAddr_Delivery()
    { return &m_pTxn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA     BuffAddr_StockLevel() {
return &m_pTxn->u.StockLevel; };
    inline PORDER_STATUS_DATA   BuffAddr_OrderStatus() {
return &m_pTxn->u.OrderStatus; };

    void NewOrder      ();
    void Payment       ();
    void StockLevel    ();
    void OrderStatus   ();
    void Delivery      () { throw new CCOMERR(E_NOTIMPL); }
};

// not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM) (BOOL);

/*      FILE:          METHODS.H

```

```

*           Microsoft TPC-C Kit Ver. 4.20.000
*           Copyright Microsoft, 1999
*           All Rights Reserved
*
*           not yet audited
*
* PURPOSE:   Header file for COM components.
*
* Change history:
*           4.20.000 - first version
*/

enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CCOMPONENT_ERR(COMPONENT_ERROR Err, char *szTextDetail,
DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail, szTextDetail );
        m_SystemErr = dwSystemErr;
        m_szErrorText = NULL;
    };

    ~CCOMPONENT_ERR()
    {
        if (m_szTextDetail != NULL)
            delete [] m_szTextDetail;
        if (m_szErrorText != NULL)
            delete [] m_szErrorText;
    };

    COMPONENT_ERROR      m_Error;
    char                  *m_szTextDetail;
    char                  *m_szErrorText;
};

```

```

DWORD          m_SystemErr;

int ErrorType() {return ERR_TYPE_COMPONENT;};
int ErrorNum() {return m_Error;};
char *ErrorText();
};

static void WriteMessageToEventLog(LPTSTR lpszMsg);

////////////////////////////////////
////
// CTPCC_Common
class CTPCC_Common :
public ITPCC,
public IObjectControl,
public IObjectConstruct,
public CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
    COM_INTERFACE_ENTRY(ITPCC)
    COM_INTERFACE_ENTRY(IObjectControl)
    COM_INTERFACE_ENTRY(IObjectConstruct)
END_COM_MAP()

    CTPCC_Common();
    ~CTPCC_Common();

// ITPCC
public:
    HRESULT __stdcall NewOrder(          int* iSize, UCHAR** txn);
    HRESULT __stdcall Payment(          int* iSize, UCHAR** txn);
    HRESULT __stdcall Delivery(         int* iSize, UCHAR** txn);
    {return E_NOTIMPL;};
    HRESULT __stdcall StockLevel( int* iSize, UCHAR** txn);
    HRESULT __stdcall OrderStatus(     int* iSize, UCHAR** txn);

    HRESULT __stdcall CallSetComplete();

// IObjectControl
    STDMETHODIMP_(BOOL) CanBePooled() { return m_bCanBePooled; }
    STDMETHODIMP Activate() { return S_OK; } // we don't support
COM Services transactions (no enlistment)
    STDMETHODIMP_(void) Deactivate() { /* nothing to do */ }

// IObjectConstruct
    STDMETHODIMP Construct(IDispatch * pUnk);

// helper methods
private:
    BOOL          m_bCanBePooled;
};

```



```

CTPCC_BASE      *m_pTxn;

struct COM_DATA
{
    int retval;
    int error;
    union
    {
        NEW_ORDER_DATA      NewOrder;
        PAYMENT_DATA         Payment;
        DELIVERY_DATA        Delivery;
        STOCK_LEVEL_DATA     StockLevel;
        ORDER_STATUS_DATA    OrderStatus;
    } u;
};

////////////////////////////////////
////
// CTPCC
class CTPCC :
    public CTPCC_Common,
    public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

};

////////////////////////////////////
////
// CNewOrder
class CNewOrder :
    public CTPCC_Common,
    public CComCoClass<CNewOrder, &CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

BEGIN_COM_MAP(CNewOrder)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:

```

```

// HRESULT __stdcall NewOrder(          int* iSize, UCHAR** txn)
{return E_NOTIMPL;}
// HRESULT __stdcall Payment(          int* iSize, UCHAR** txn)
{return E_NOTIMPL;}
// HRESULT __stdcall StockLevel( int* iSize, UCHAR** txn) {return
E_NOTIMPL;}
// HRESULT __stdcall OrderStatus(      int* iSize, UCHAR** txn)
{return E_NOTIMPL;}
};

////////////////////////////////////
////
// COrderStatus
class COrderStatus :
    public CTPCC_Common,
    public CComCoClass<COrderStatus, &CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
// HRESULT __stdcall NewOrder(          int* iSize, UCHAR** txn)
{return E_NOTIMPL;}
// HRESULT __stdcall Payment(          int* iSize, UCHAR** txn)
{return E_NOTIMPL;}
// HRESULT __stdcall StockLevel( int* iSize, UCHAR** txn) {return
E_NOTIMPL;}
// HRESULT __stdcall OrderStatus(      int* iSize, UCHAR** txn)
{return E_NOTIMPL;}
};

////////////////////////////////////
////
// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment, &CLSID_Payment>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

```

```

// ITPCC
public:
    HRESULT __stdcall NewOrder(          int* iSize, UCHAR** txn)
    {return E_NOTIMPL;}
    // HRESULT __stdcall Payment(        int* iSize, UCHAR** txn)
    {return E_NOTIMPL;}
    HRESULT __stdcall StockLevel( int* iSize, UCHAR** txn) {return
E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(      int* iSize, UCHAR** txn)
    {return E_NOTIMPL;}
};

////////////////////////////////////
////
// CStockLevel
class CStockLevel :
    public CTPCC_Common,
    public CComCoClass<CStockLevel, &CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
    COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(          int* iSize, UCHAR** txn)
    {return E_NOTIMPL;}
    HRESULT __stdcall Payment(          int* iSize, UCHAR** txn)
    {return E_NOTIMPL;}
    // HRESULT __stdcall StockLevel( int* iSize, UCHAR** txn) {return
E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(      int* iSize, UCHAR** txn)
    {return E_NOTIMPL;}
};

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc_com_all.rc
//
#define IDS_PROJNAME            100
#define IDR_TPCC                101
#define IDR_NEWORDER            102
#define IDR_ORDERSTATUS         103
#define IDR_PAYMENT             104
#define IDR_STOCKLEVEL         105

```

```

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE        202
#define _APS_NEXT_COMMAND_VALUE        32768
#define _APS_NEXT_CONTROL_VALUE        201
#define _APS_NEXT_SYMED_VALUE          106
#endif
#endif

/*      FILE:          TPCC_COM_ALL.CPP
 *
 *          Microsoft TPC-C Kit Ver. 4.20.000
 *          Copyright Microsoft, 1999
 *
 *          All Rights Reserved
 *
 *          Version 4.10.000 audited by Richard Gimarc,
Performance Metrics, 3/17/99
 *
 *      PURPOSE:      Implementation for TPC-C Tuxedo class.
 *      Contact:      Charles Levine (clevine@microsoft.com)
 *
 *      Change history:
 *          4.20.000 - updated rev number to match kit
 */

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADED

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it if you want to
override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>
#include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"
//tpckit transaction header contains definations of structures
specific to TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"

```

```

#include "..\..\common\src\ReadRegistry.h"
#include "..\..\db_dblib_dll\src\tpcc_dblib.h" // DBLIB
implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h" // ODBC
implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
    OBJECT_ENTRY(CLSID_TPCC, CTPCC)
    OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
    OBJECT_ENTRY(CLSID_OrderStatus, CorderStatus)
    OBJECT_ENTRY(CLSID_Payment, CPayment)
    OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char
    szMyComputerName [MAX_COMPUTERNAME_LENGTH+1];

static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

////////////////////////////////////
////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID
/*lpReserved*/)
{
    char szDllName[128];

    try
    {
        if (dwReason == DLL_PROCESS_ATTACH)
        {
            _Module.Init(ObjectMap, hInstance);
            DisableThreadLibraryCalls(hInstance);

```

```

        DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
        GetComputerName(szMyComputerName, &dwSize);
        szMyComputerName[dwSize] = 0;

        if ( ReadTPCCRegistrySettings( &Reg ) )
            throw new CCOMPONENT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

        if (Reg.eDB_Protocol == DBLIB)
        {
            strcpy( szDllName, Reg.szPath );
            strcat( szDllName, "tpcc_dblib.dll");
            hLibInstanceDb = LoadLibrary( szDllName );
            if (hLibInstanceDb == NULL)
                throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

            // get function pointer to wrapper for
            class constructor
                pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
GetProcAddress(hLibInstanceDb, "CTPCC_DBLIB_new");
            if (pCTPCC_DBLIB_new == NULL)
                throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
        }
        else if (Reg.eDB_Protocol == ODBC)
        {
            strcpy( szDllName, Reg.szPath );
            strcat( szDllName, "tpcc_odbc.dll");
            hLibInstanceDb = LoadLibrary( szDllName );
            if (hLibInstanceDb == NULL)
                throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

            // get function pointer to wrapper for
            class constructor
                pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
            if (pCTPCC_ODBC_new == NULL)
                throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
        }
        else
            throw new CCOMPONENT_ERR(
ERR_UNKNOWN_DB_PROTOCOL );
    }
    else if (dwReason == DLL_PROCESS_DETACH)
        _Module.Term();
}
catch (CBaseErr *e)
{

```

```

        WriteMessageToEventLog(e->ErrorText());
        delete e;
        return FALSE;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception in object
DllMain"));
        return FALSE;
    }

    return TRUE;    // OK
}

////////////////////////////////////
////
// Used to determine whether the DLL can be unloaded by OLE

STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK : S_FALSE;
}

////////////////////////////////////
////
// Returns a class factory to create an object of the requested type

STDAPI DllGetClassObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid, ppv);
}

////////////////////////////////////
////
// DllRegisterServer - Adds entries to the system registry

STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

////////////////////////////////////
////
// DllUnregisterServer - Removes entries from the system registry

STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

```

```

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR    szMsg[256];
    HANDLE   hEventSource;
    LPTSTR   lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL, TEXT("tpcc_com_all.dll"));

    _stprintf(szMsg, TEXT("Error in COM+ TPC-C Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event source
                   EVENTLOG_ERROR_TYPE, // event type
                   0, // event category
                   0, // event ID
                   NULL, // current user's SID
                   2, // strings in lpszStrings
                   0, // no bytes of raw data
                   (LPCTSTR *)lpszStrings, // array of error strings
                   NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
 *
 */

char* CCOMPONENT_ERR::ErrorText(void)
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES, "Required entries
missing from registry." },
        { ERR_LOADDLL_FAILED, "Load of DLL failed.
DLL=" },
        { ERR_GETPROCADDR_FAILED, "Could not map proc
in DLL. GetProcAddr error. DLL=" },
    },
}

```

```

        { ERR_UNKNOWN_DB_PROTOCOL,          "Unknown database
protocol specified in registry." },
        { 0,                                ""
    }
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown error number." );
        break;
    }
    if (m_Error == errorMsgs[i].iError)
    {
        strcpy( szTmp, errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    sprintf( szTmp+strlen(szTmp), " Error=%d", m_SystemErr
);

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{
    if (m_pTxn)
        delete m_pTxn;
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;

    // get our object context

```

```

    HRESULT hr = CoGetObjectContext( IID_IObjectContext, (void
**) &pObjectContext );
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

//
// called by the ctor activator
//
STDMETHODIMP CTPCC_Common::Construct(IDispatch * pUnk)
{
    // Code to access construction string, if needed later...
    // if (!pUnk)
    //     return E_UNEXPECTED;
    // IObjectConstructString * pString = NULL;
    // HRESULT hr = pUnk-
>QueryInterface(IID_IObjectConstructString, (void **) &pString);
    // pString->Release();

    try
    {
        if (Reg.eDB_Protocol == ODBC)
            m_pTxn = pCTPCC_ODBC_new( Reg.szDbServer,
Reg.szDbUser, Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        else if (Reg.eDB_Protocol == DBLIB)
            m_pTxn = pCTPCC_DBLIB_new( Reg.szDbServer,
Reg.szDbUser, Reg.szDbPassword, szMyComputerName, Reg.szDbName );
    }
    catch (CBaseErr *e)
    {
        WriteMessageToEventLog(e->ErrorText());
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception in object
::Construct"));
        return E_FAIL;
    }

    return S_OK;
}

HRESULT CTPCC_Common::NewOrder(int* iSize, UCHAR **txn)
{
    PNEW_ORDER_DATA    pNewOrder;
    COM_DATA            *pData;

    try
    {
        pData = (COM_DATA*)txn;

```

```

        pNewOrder = m_pTxn->BuffAddr_NewOrder();

        memcpy(pNewOrder, &pData->u.NewOrder,
sizeof(NEW_ORDER_DATA));
        m_pTxn->NewOrder();
        memcpy( &pData->u.NewOrder, pNewOrder,
sizeof(NEW_ORDER_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component
is toast
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum()
== 10005)) ||
            ((e->ErrorType() == ERR_TYPE_ODBC) && (e-
>ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::Payment(int* iSize, UCHAR** txn)
{
    PPAYMENT_DATA pPayment;
    COM_DATA      *pData;

    try
    {
        pData = (COM_DATA*)*txn;
        pPayment = m_pTxn->BuffAddr_Payment();

        memcpy(pPayment, &pData->u.Payment, sizeof(PAYMENT_DATA)
);

        m_pTxn->Payment();
        memcpy( &pData->u.Payment, pPayment, sizeof(PAYMENT_DATA)
);
    }
}

```

```

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component
is toast
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum()
== 10005)) ||
            ((e->ErrorType() == ERR_TYPE_ODBC) && (e-
>ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::StockLevel(int* iSize, UCHAR** txn)
{
    PSTOCK_LEVEL_DATA pStockLevel;
    COM_DATA          *pData;

    try
    {
        pData = (COM_DATA*)*txn;
        pStockLevel = m_pTxn->BuffAddr_StockLevel();

        memcpy(pStockLevel, &pData->u.StockLevel,
sizeof(STOCK_LEVEL_DATA) );
        m_pTxn->StockLevel();
        memcpy( &pData->u.StockLevel, pStockLevel,
sizeof(STOCK_LEVEL_DATA) );

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component
is toast

```

```

    if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum()
== 10005)) ||
        ((e->ErrorType() == ERR_TYPE_ODBC) && (e-
>ErrorNum() == 10054)) )
        m_bCanBePooled = FALSE;

    pData->retval = e->ErrorType();
    pData->error = e->ErrorNum();
    delete e;
    return E_FAIL;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled exception."));
    pData->retval = ERR_TYPE_LOGIC;
    pData->error = 0;
    m_bCanBePooled = FALSE;
    return E_FAIL;
}
}

HRESULT CTPCC_Common::OrderStatus(int* iSize, UCHAR** txn)
{
    PORDER_STATUS_DATA    pOrderStatus;
    COM_DATA                *pData;

    try
    {
        pData = (COM_DATA*)*txn;
        pOrderStatus = m_pTxn->BuffAddr_OrderStatus();

        memcpy(pOrderStatus, &pData->u.OrderStatus,
sizeof(ORDER_STATUS_DATA) );
        m_pTxn->OrderStatus();
        memcpy( &pData->u.OrderStatus, pOrderStatus,
sizeof(ORDER_STATUS_DATA) );

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component
is toast
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e->ErrorNum()
== 10005)) ||
            ((e->ErrorType() == ERR_TYPE_ODBC) && (e-
>ErrorNum() == 10054)) )
                m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
    }
}

```

```

    delete e;
    return E_FAIL;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled exception."));
    pData->retval = ERR_TYPE_LOGIC;
    pData->error = 0;
    m_bCanBePooled = FALSE;
    return E_FAIL;
}
}

; tpcc_com_all.def : Declares the module parameters.

LIBRARY      "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow      @1 PRIVATE
    DllGetClassObject    @2 PRIVATE
    DllRegisterServer    @3 PRIVATE
    DllUnregisterServer  @4 PRIVATE

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the definitions for the interfaces
*/

/* File created by MIDL compiler version 5.02.0235 */
/* at Fri Aug 13 18:56:24 1999
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
    Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
    error checks: allocation ref bounds_check enum stub_data
    VC __declspec() decoration level:
        __declspec(uuid()), __declspec(selectany), __declspec(novtable)
        DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING(  )

/* verify that the <rpcndr.h> version is high enough to compile this
file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __tpcc_com_all_h__

```

```

#define __tpcc_com_all_h__

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__

#ifdef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__

#ifdef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

#ifdef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifdef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__

```

```

#define __StockLevel_FWD_DEFINED__

#ifdef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifdef __cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#ifndef __TPCCLib_LIBRARY_DEFINED__
#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;

EXTERN_C const CLSID CLSID_TPCC;

#ifdef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-00C04FBFE08B")
TPCC;
#endif

```



```

EXTERN_C const CLSID CLSID_NewOrder;

#ifdef __cplusplus

class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifdef __cplusplus

class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifdef __cplusplus

class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifdef __cplusplus

class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-00C04FBFE08B")
StockLevel;
#endif
#endif /* __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif

#endif

/* FILE:          TPCC.IDL
 *                Microsoft TPC-C Kit Ver. 4.20.000
 *                Copyright Microsoft, 1999
 *                All Rights Reserved
 *
 *                not yet audited
 */

```

```

 * PURPOSE:      IDL source for TPCC.dll. This file is processed by
the MIDL tool to
 *                produce the type library (TPCC.tlb) and
marshalling code.
 *
 * Change history:
 *                4.20.000 - first version
 */

interface TPCC;
interface NewOrder;
interface OrderStatus;
interface Payment;
interface StockLevel;

import "oidl.idl";
import "ocidl.idl";
import "..\tpcc_com_ps\src\tpcc_com_ps.idl";

[
    uuid(122A3117-2520-11D3-BA71-00C04FBFE08B),
    version(1.0),
    helpstring("TPC-C 1.0 Type Library")
]
library TPCCLib
{
    importlib("stdole32.tlb");
    importlib("stdole2.tlb");

    [
        uuid(122A3128-2520-11D3-BA71-00C04FBFE08B),
        helpstring("All Txns Class")
    ]
    coclass TPCC
    {
        [default] interface ITPCC;
    };

    [
        uuid(975BAABF-84A7-11D2-BA47-00C04FBFE08B),
        helpstring("NewOrder Class")
    ]
    coclass NewOrder
    {
        [default] interface ITPCC;
    };

    [
        uuid(266836AD-A50D-11D2-BA4E-00C04FBFE08B),
        helpstring("OrderStatus Class")
    ]

```

```

]
coclass OrderStatus
{
    [default] interface ITPCC;
};

[
    uuid(CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B),
    helpstring("Payment Class")
]
coclass Payment
{
    [default] interface ITPCC;
};

[
    uuid(2668369E-A50D-11D2-BA4E-00C04FBFE08B),
    helpstring("StockLevel Class")
]
coclass StockLevel
{
    [default] interface ITPCC;
};
};

//Microsoft Developer Studio generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "winres.h"

////////////////////////////////////
////
#undef APSTUDIO_READONLY_SYMBOLS

////////////////////////////////////
////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

```

```

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
////
//
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"winres.h\"\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "1 TYPelib \"tpcc_com_all.tlb\"\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

#ifdef _MAC
////////////////////////////////////
////
//
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 1,0,0,1
PRODUCTVERSION 1,0,0,1
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x4L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904B0"
        BEGIN
            VALUE "CompanyName", "\0"

```

```

        VALUE "FileDescription", "tpcc_com_all Module\0"
        VALUE "FileVersion", "1, 0, 0, 1\0"
        VALUE "InternalName", "TPCCNEWORDER\0"
        VALUE "LegalCopyright", "Copyright 1997\0"
        VALUE "OriginalFilename", "tpcc_com_all.DLL\0"
        VALUE "ProductName", "tpcc_com_all Module\0"
        VALUE "ProductVersion", "1, 0, 0, 1\0"
        VALUE "OLESelfRegister", "\0"
    END
END
BLOCK "VarFileInfo"
BEGIN
    VALUE "Translation", 0x409, 1200
END
END

#endif // !_MAC

////////////////////////////////////
////
//
// REGISTRY
//

IDR_TPCC            REGISTRY DISCARDABLE    "tpcc_com_all.rgs"
IDR_NEWORDER       REGISTRY DISCARDABLE    "tpcc_com_no.rgs"
IDR_ORDERSTATUS   REGISTRY DISCARDABLE    "tpcc_com_os.rgs"
IDR_PAYMENT        REGISTRY DISCARDABLE    "tpcc_com_pay.rgs"
IDR_STOCKLEVEL    REGISTRY DISCARDABLE    "tpcc_com_sl.rgs"

////////////////////////////////////
////
//
// String Table
//

STRINGTABLE DISCARDABLE
BEGIN
    IDS_PROJNAME        "tpcc_com_all"
END

#endif // English (U.S.) resources
////////////////////////////////////
////
//
//
// Generated from the TEXTINCLUDE 3 resource.

```

```

//
1 TYPELIB "tpcc_com_all.tlb"

////////////////////////////////////
////
#endif // not APSTUDIO_INVOKED

HKCR
{
    TPCC.AllTxns.1 = s 'All Txns Class'
    {
        CLSID = s '{122A3128-2520-11D3-BA71-00C04FBFE08B}'
    }
    TPCC.AllTxns = s 'TPCC Class'
    {
        CurVer = s 'TPCC.AllTxns.1'
    }
    NoRemove CLSID
    {
        ForceRemove {122A3128-2520-11D3-BA71-00C04FBFE08B} = s
'TPCC Class'
        {
            ProgID = s 'TPCC.AllTxns.1'
            VersionIndependentProgID = s 'TPCC.AllTxns'
            InprocServer32 = s '%MODULE%'
            {
                val ThreadingModel = s 'Both'
            }
        }
    }
}

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.02.0235 */
/* at Fri Aug 13 18:56:24 1999
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADER( )

```

```

#if !defined(_M_IA64) && !defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,
,0x8B);

```

```

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x
8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE
0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,
0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0
,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0
xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AXP64) */

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.02.0235 */
/* at Fri Aug 13 18:56:25 1999
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
    Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run,appending), ms_ext,
c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/

```

```

//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,
0x8B);

```

```

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0xC0,0x4F,0xBF,0xE0,0x
8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE
0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,
0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0xE0
,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0x00,0xC0,0x4F,0xBF,0
xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64) */

HKCR
{
    TPCC.NewOrder.1 = s 'NewOrder Class'
    {
        CLSID = s '{975BAABF-84A7-11D2-BA47-00C04FBFE08B}'
    }
    TPCC.NewOrder = s 'NewOrder Class'
    {
        CurVer = s 'TPCC.NewOrder.1'
    }
    NoRemove CLSID
    {
        ForceRemove {975BAABF-84A7-11D2-BA47-00C04FBFE08B} = s
'NewOrder Class'
        {
            ProgID = s 'TPCC.NewOrder.1'

```

```

        VersionIndependentProgID = s 'TPCC.NewOrder'
        InprocServer32 = s '%MODULE%'
        {
            val ThreadingModel = s 'Both'
        }
    }
}

HKCR
{
    TPCC.OrderStatus.1 = s 'OrderStatus Class'
    {
        CLSID = s '{266836AD-A50D-11D2-BA4E-00C04FBFE08B}'
    }
    TPCC.OrderStatus = s 'OrderStatus Class'
    {
        CurVer = s 'TPCC.OrderStatus.1'
    }
    NoRemove CLSID
    {
        ForceRemove {266836AD-A50D-11D2-BA4E-00C04FBFE08B} = s
'OrderStatus Class'
        {
            ProgID = s 'TPCC.OrderStatus.1'
            VersionIndependentProgID = s 'TPCC.OrderStatus'
            InprocServer32 = s '%MODULE%'
            {
                val ThreadingModel = s 'Both'
            }
        }
    }
}

HKCR
{
    TPCC.Payment.1 = s 'Payment Class'
    {
        CLSID = s '{CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B}'
    }
    TPCC.Payment = s 'Payment Class'
    {
        CurVer = s 'TPCC.Payment.1'
    }
    NoRemove CLSID
    {
        ForceRemove {CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B} = s
'Payment Class'
        {
            ProgID = s 'TPCC.Payment.1'
            VersionIndependentProgID = s 'TPCC.Payment'
            InprocServer32 = s '%MODULE%'
            {

```

```

        val ThreadingModel = s 'Both'
    }
}

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the definitions for the interfaces
*/

/* File created by MIDL compiler version 5.02.0235 */
/* at Fri Aug 13 18:56:17 1999
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough to compile this
file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of <rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

```

```

/* header files for imported files */
#include "oidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

#ifdef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique] [helpstring] [uuid] [object] */

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

MIDL_INTERFACE("FEEB6AA2-84B1-11d2-BA47-00C04FBFE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT __stdcall NewOrder(
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn) = 0;

    virtual HRESULT __stdcall Payment(
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn) = 0;

    virtual HRESULT __stdcall Delivery(
        /* [in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn) = 0;

    virtual HRESULT __stdcall StockLevel(
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn) = 0;

    virtual HRESULT __stdcall OrderStatus(
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn) = 0;

```

```

    virtual HRESULT __stdcall CallSetComplete( void) = 0;
};

#else /* C style interface */

typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *QueryInterface )(
        ITPCC __RPC_FAR * This,
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject);

    ULONG ( STDMETHODCALLTYPE __RPC_FAR *AddRef )(
        ITPCC __RPC_FAR * This);

    ULONG ( STDMETHODCALLTYPE __RPC_FAR *Release )(
        ITPCC __RPC_FAR * This);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *NewOrder )(
        ITPCC __RPC_FAR * This,
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Payment )(
        ITPCC __RPC_FAR * This,
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Delivery )(
        ITPCC __RPC_FAR * This,
        /* [in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *StockLevel )(
        ITPCC __RPC_FAR * This,
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *OrderStatus )(
        ITPCC __RPC_FAR * This,
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
* __RPC_FAR *txn);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *CallSetComplete )(
        ITPCC __RPC_FAR * This);

```

```

        END_INTERFACE
    } ITPCCVtbl;

    interface ITPCC
    {
        CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
    };

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This, riid, ppvObject) \
    (This)->lpVtbl -> QueryInterface(This, riid, ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lpVtbl -> AddRef(This)

#define ITPCC_Release(This) \
    (This)->lpVtbl -> Release(This)

#define ITPCC_NewOrder(This, iSize, txn) \
    (This)->lpVtbl -> NewOrder(This, iSize, txn)

#define ITPCC_Payment(This, iSize, txn) \
    (This)->lpVtbl -> Payment(This, iSize, txn)

#define ITPCC_Delivery(This, iSize, txn) \
    (This)->lpVtbl -> Delivery(This, iSize, txn)

#define ITPCC_StockLevel(This, iSize, txn) \
    (This)->lpVtbl -> StockLevel(This, iSize, txn)

#define ITPCC_OrderStatus(This, iSize, txn) \
    (This)->lpVtbl -> OrderStatus(This, iSize, txn)

#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl -> CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
    /* [out][in] */ int __RPC_FAR *iSize,

```

```

    /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR *__RPC_FAR
    *txn);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC __RPC_FAR * This,
    /* [out][in] */ int __RPC_FAR *iSize,
    /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR *__RPC_FAR
    *txn);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ int __RPC_FAR *iSize,
    /* [size_is][size_is][in] */ unsigned char __RPC_FAR *__RPC_FAR
    *txn);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC __RPC_FAR * This,
    /* [out][in] */ int __RPC_FAR *iSize,
    /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR *__RPC_FAR
    *txn);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *_pdwStubPhase);

```



```

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC __RPC_FAR * This,
    /* [out][in] */ int __RPC_FAR *iSize,
    /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR *__RPC_FAR
    *txn);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC __RPC_FAR * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */
/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif

#endif

HKCR
{
    TPCC.StockLevel.1 = s 'StockLevel Class'
    {
        CLSID = s '{2668369E-A50D-11D2-BA4E-00C04FBFE08B}'
    }
    TPCC.StockLevel = s 'StockLevel Class'
    {
        CurVer = s 'TPCC.StockLevel.1'
    }
    NoRemove CLSID
    {

```

```

        ForceRemove {2668369E-A50D-11D2-BA4E-00C04FBFE08B} = s
        'StockLevel Class'
        {
            ProgID = s 'TPCC.StockLevel.1'
            VersionIndependentProgID = s 'TPCC.StockLevel'
            InprocServer32 = s '%MODULE%'
            {
                val ThreadingModel = s 'Both'
            }
        }
    }
}

/*****
DllData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file compile.

To completely reconstruct this file, delete it and rerun MIDL
on all the IDL files in this DLL, specifying this file for the
/dlldata command line option

*****/

#include <rpcproxy.h>

#ifdef __cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

#ifdef __cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */

LIBRARY "tpcc_com_ps"

```

```

DESCRIPTION 'Proxy/Stub DLL'

EXPORTS
    DllGetClassObject          @1    PRIVATE
    DllCanUnloadNow           @2    PRIVATE
    GetProxyDllInfo           @3    PRIVATE
    DllRegisterServer         @4    PRIVATE
    DllUnregisterServer       @5    PRIVATE

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the definitions for the interfaces */

/* File created by MIDL compiler version 5.02.0235 */
/* at Fri Aug 13 18:56:17 1999 */
/*
 * Compiler settings for .\src\tpcc_com_ps.idl:
 * Oicf (OptLev=i2), Wl, Zp8, env=Win32 (32b run), ms_ext, c_ext
 * error checks: allocation ref bounds_check enum stub_data
 * VC __declspec() decoration level:
 * __declspec(uuid()), __declspec(selectany), __declspec(novtable)
 * DECLSPEC_UUID(), MIDL_INTERFACE()
 */
//@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough to compile this
file*/
#ifdef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifdef __RPCNDR_H_VERSION__
#error this stub requires an updated version of <rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifdef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifdef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

/* Forward Declarations */

```

```

#ifdef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "ocidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

#ifdef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][object] */

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

    MIDL_INTERFACE("FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B")
    ITPCC : public IUnknown
    {
    public:
        virtual HRESULT __stdcall NewOrder(
            /* [out][in] */ int __RPC_FAR *iSize,
            /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
            * __RPC_FAR *txn) = 0;

        virtual HRESULT __stdcall Payment(
            /* [out][in] */ int __RPC_FAR *iSize,
            /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
            * __RPC_FAR *txn) = 0;

        virtual HRESULT __stdcall Delivery(
            /* [in] */ int __RPC_FAR *iSize,
            /* [size_is][size_is][in] */ unsigned char __RPC_FAR
            * __RPC_FAR *txn) = 0;

        virtual HRESULT __stdcall StockLevel(
            /* [out][in] */ int __RPC_FAR *iSize,
            /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
            * __RPC_FAR *txn) = 0;

        virtual HRESULT __stdcall OrderStatus(

```

```

        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
*_RPC_FAR *txn) = 0;

        virtual HRESULT __stdcall CallSetComplete( void) = 0;
};

#else /* C style interface */

typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *QueryInterface )(
        ITPCC __RPC_FAR * This,
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void __RPC_FAR *__RPC_FAR *ppvObject);

    ULONG ( STDMETHODCALLTYPE __RPC_FAR *AddRef )(
        ITPCC __RPC_FAR * This);

    ULONG ( STDMETHODCALLTYPE __RPC_FAR *Release )(
        ITPCC __RPC_FAR * This);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *NewOrder )(
        ITPCC __RPC_FAR * This,
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
*_RPC_FAR *txn);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Payment )(
        ITPCC __RPC_FAR * This,
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
*_RPC_FAR *txn);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Delivery )(
        ITPCC __RPC_FAR * This,
        /* [in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][in] */ unsigned char __RPC_FAR
*_RPC_FAR *txn);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *StockLevel )(
        ITPCC __RPC_FAR * This,
        /* [out][in] */ int __RPC_FAR *iSize,
        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
*_RPC_FAR *txn);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *OrderStatus )(
        ITPCC __RPC_FAR * This,
        /* [out][in] */ int __RPC_FAR *iSize,

```

```

        /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR
*_RPC_FAR *txn);

        HRESULT ( STDMETHODCALLTYPE __RPC_FAR *CallSetComplete )(
        ITPCC __RPC_FAR * This);

    END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
};

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl -> QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lpVtbl -> AddRef(This)

#define ITPCC_Release(This) \
    (This)->lpVtbl -> Release(This)

#define ITPCC_NewOrder(This,iSize,txn) \
    (This)->lpVtbl -> NewOrder(This,iSize,txn)

#define ITPCC_Payment(This,iSize,txn) \
    (This)->lpVtbl -> Payment(This,iSize,txn)

#define ITPCC_Delivery(This,iSize,txn) \
    (This)->lpVtbl -> Delivery(This,iSize,txn)

#define ITPCC_StockLevel(This,iSize,txn) \
    (This)->lpVtbl -> StockLevel(This,iSize,txn)

#define ITPCC_OrderStatus(This,iSize,txn) \
    (This)->lpVtbl -> OrderStatus(This,iSize,txn)

#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl -> CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

```

```

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
    /* [out][in] */ int __RPC_FAR *iSize,
    /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR * __RPC_FAR
*txn);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC __RPC_FAR * This,
    /* [out][in] */ int __RPC_FAR *iSize,
    /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR * __RPC_FAR
*txn);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ int __RPC_FAR *iSize,
    /* [size_is][size_is][in] */ unsigned char __RPC_FAR * __RPC_FAR
*txn);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC __RPC_FAR * This,
    /* [out][in] */ int __RPC_FAR *iSize,
    /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR * __RPC_FAR
*txn);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * pRpcChannelBuffer,

```

```

    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC __RPC_FAR * This,
    /* [out][in] */ int __RPC_FAR *iSize,
    /* [size_is][size_is][out][in] */ unsigned char __RPC_FAR * __RPC_FAR
*txn);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC __RPC_FAR * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer * pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD * _pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif

#endif

/*
FILE:          ITPCC.IDL
*
*              Microsoft TPC-C Kit Ver. 4.20.000
*              Copyright Microsoft, 1999
*
*              All Rights Reserved
*
*
*              not yet audited
*
*/

```

```

*      PURPOSE:      Defines the interface used by TPCC. This interface
can be implemented by C++ components.
*
*      Change history:
*      4.20.000 - first version
*/

```

```

// Forward declare all types defined
//interface ITPCC;
import "oidl.idl";
import "ocidl.idl";

```

```

[
    object,
    uuid(FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
interface ITPCC : IUnknown
{
    HRESULT STDMETHODCALLTYPE NewOrder
        (
            [in, out] int* iSize,
            [in, out, size_is( ,
*iSize)] char** txn
        );

    HRESULT STDMETHODCALLTYPE Payment
        (
            [in, out] int* iSize,
            [in, out, size_is( ,
*iSize)] char** txn
        );

    HRESULT STDMETHODCALLTYPE Delivery
        (
            [in] int* iSize,
            [in, size_is( , *iSize)]
char** txn
        );

    HRESULT STDMETHODCALLTYPE StockLevel
        (
            [in, out] int* iSize,
            [in, out, size_is( ,
*iSize)] char** txn
        );

    HRESULT STDMETHODCALLTYPE OrderStatus
        (
            [in, out] int* iSize,

```

```

[in, out, size_is( ,
*iSize)] char** txn
        );

    HRESULT STDMETHODCALLTYPE CallSetComplete
        (
        );
}; // interface ITPCC

```

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */
/* link this file in with the server and any clients */

```

```

/* File created by MIDL compiler version 5.02.0235 */
/* at Fri Aug 13 18:56:17 1999
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADER( )
#if !defined(_M_IA64) && !defined(_M_AXP64)
#ifdef __cplusplus
extern "C"{
#endif
#include <rpc.h>
#include <rpcndr.h>
#ifdef _MIDL_USE_GUIDDEF_
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif
#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \

```

```

        DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifdef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifdef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEB6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8
B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AXP64)*/

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.02.0235 */
/* at Fri Aug 13 18:56:18 1999
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:

```

```

    Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run,appending), ms_ext,
c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#ifdef _M_IA64 || defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifdef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifdef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifdef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \

```

```

    const type name = {1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8
B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64)*/

#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the proxy stub code */

/* File created by MIDL compiler version 5.02.0235 */
/* at Fri Aug 13 18:56:17 1999
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
    Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
    error checks: allocation ref bounds_check enum stub_data
    VC __declspec() decoration level:
        __declspec(uuid()), __declspec(selectany), __declspec(novtable)
        DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING(  )

#if !defined(_M_IA64) && !defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high enough to compile this
file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of <rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

```

```

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 33
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 0

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short          Pad;
    unsigned char  Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short          Pad;
    unsigned char  Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x46}}
*/

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}}
*/

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

```

```

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0,
    0,
    0,
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *)-1 /* ITPCC::NewOrder */ ,
    (void *)-1 /* ITPCC::Payment */ ,
    (void *)-1 /* ITPCC::Delivery */ ,
    (void *)-1 /* ITPCC::StockLevel */ ,
    (void *)-1 /* ITPCC::OrderStatus */ ,
    (void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,

```

```

0,
0,
0,
0,
__MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x20000, /* Ndr library version */
0,
0x50200eb, /* MIDL Version 5.2.235 */
0,
0,
0, /* notify & notify_flag routine table */
1, /* Flags */
0, /* Reserved3 */
0, /* Reserved4 */
0 /* Reserved5 */
};

#pragma data_seg(".rdata")

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this stub because it
uses these features:
#error -Oif or -Oicf.
#error However, your C/C++ compilation flags indicate you intend to run
this app on earlier systems.
#error This app will die there with the RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString =
{
    {
        0,

        /* Procedure NewOrder */

        0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
#ifdef _ALPHA_
        /* 8 */ NdrFcShort( 0x10 ), /* x86, MIPS, PPC Stack size/offset
= 16 */
#else
        NdrFcShort( 0x20 ), /* Alpha Stack size/offset =
32 */
#endif
        /* 10 */ NdrFcShort( 0x8 ), /* 8 */

```



```

/* 12 */      NdrFcShort( 0x10 ), /* 16 */
/* 14 */      0x7, /* Oi2 Flags: srv must size, clt must
size, has return, */
                0x3, /* 3 */

        /* Parameter iSize */

/* 16 */      NdrFcShort( 0x158 ), /* Flags: in, out, base type,
simple ref, */
#ifdef _ALPHA_
/* 18 */      NdrFcShort( 0x4 ), /* x86, MIPS, PPC Stack size/offset
= 4 */
#else
                NdrFcShort( 0x8 ), /* Alpha Stack size/offset =
8 */
#endif
/* 20 */      0x8, /* FC_LONG */
                0x0, /* 0 */

        /* Parameter txn */

/* 22 */      NdrFcShort( 0x201b ), /* Flags: must size, must free, in,
out, srv alloc size=8 */
#ifdef _ALPHA_
/* 24 */      NdrFcShort( 0x8 ), /* x86, MIPS, PPC Stack size/offset
= 8 */
#else
                NdrFcShort( 0x10 ), /* Alpha Stack size/offset =
16 */
#endif
/* 26 */      NdrFcShort( 0x6 ), /* Type Offset=6 */

        /* Return value */

/* 28 */      NdrFcShort( 0x70 ), /* Flags: out, return, base type,
*/
#ifdef _ALPHA_
/* 30 */      NdrFcShort( 0xc ), /* x86, MIPS, PPC Stack size/offset
= 12 */
#else
                NdrFcShort( 0x18 ), /* Alpha Stack size/offset =
24 */
#endif
/* 32 */      0x8, /* FC_LONG */
                0x0, /* 0 */

        /* Procedure Payment */

/* 34 */      0x33, /* FC_AUTO_HANDLE */
                0x6c, /* Old Flags: object, Oi2 */
/* 36 */      NdrFcLong( 0x0 ), /* 0 */
/* 40 */      NdrFcShort( 0x4 ), /* 4 */
#ifdef _ALPHA_

```

```

/* 42 */      NdrFcShort( 0x10 ), /* x86, MIPS, PPC Stack size/offset
= 16 */
#else
                NdrFcShort( 0x20 ), /* Alpha Stack size/offset =
32 */
#endif
/* 44 */      NdrFcShort( 0x8 ), /* 8 */
/* 46 */      NdrFcShort( 0x10 ), /* 16 */
/* 48 */      0x7, /* Oi2 Flags: srv must size, clt must
size, has return, */
                0x3, /* 3 */

        /* Parameter iSize */

/* 50 */      NdrFcShort( 0x158 ), /* Flags: in, out, base type,
simple ref, */
#ifdef _ALPHA_
/* 52 */      NdrFcShort( 0x4 ), /* x86, MIPS, PPC Stack size/offset
= 4 */
#else
                NdrFcShort( 0x8 ), /* Alpha Stack size/offset =
8 */
#endif
/* 54 */      0x8, /* FC_LONG */
                0x0, /* 0 */

        /* Parameter txn */

/* 56 */      NdrFcShort( 0x201b ), /* Flags: must size, must free, in,
out, srv alloc size=8 */
#ifdef _ALPHA_
/* 58 */      NdrFcShort( 0x8 ), /* x86, MIPS, PPC Stack size/offset
= 8 */
#else
                NdrFcShort( 0x10 ), /* Alpha Stack size/offset =
16 */
#endif
/* 60 */      NdrFcShort( 0x6 ), /* Type Offset=6 */

        /* Return value */

/* 62 */      NdrFcShort( 0x70 ), /* Flags: out, return, base type,
*/
#ifdef _ALPHA_
/* 64 */      NdrFcShort( 0xc ), /* x86, MIPS, PPC Stack size/offset
= 12 */
#else
                NdrFcShort( 0x18 ), /* Alpha Stack size/offset =
24 */
#endif
/* 66 */      0x8, /* FC_LONG */
                0x0, /* 0 */

```

```

/* Procedure Delivery */
/* 68 */      0x33,      /* FC_AUTO_HANDLE */
              0x6c,      /* Old Flags: object, Oi2 */
/* 70 */      NdrFcLong( 0x0 ),      /* 0 */
/* 74 */      NdrFcShort( 0x5 ),      /* 5 */
#ifdef _ALPHA_
/* 76 */      NdrFcShort( 0x10 ),      /* x86, MIPS, PPC Stack size/offset
= 16 */
#else
              NdrFcShort( 0x20 ),      /* Alpha Stack size/offset =
32 */
#endif
/* 78 */      NdrFcShort( 0x8 ),      /* 8 */
/* 80 */      NdrFcShort( 0x8 ),      /* 8 */
/* 82 */      0x6,      /* Oi2 Flags: clt must size, has return,
*/
              0x3,      /* 3 */

/* Parameter iSize */
/* 84 */      NdrFcShort( 0x148 ),      /* Flags: in, base type, simple
ref, */
#ifdef _ALPHA_
/* 86 */      NdrFcShort( 0x4 ),      /* x86, MIPS, PPC Stack size/offset
= 4 */
#else
              NdrFcShort( 0x8 ),      /* Alpha Stack size/offset =
8 */
#endif
/* 88 */      0x8,      /* FC_LONG */
              0x0,      /* 0 */

/* Parameter txn */
/* 90 */      NdrFcShort( 0x200b ),      /* Flags: must size, must free, in,
srv alloc size=8 */
#ifdef _ALPHA_
/* 92 */      NdrFcShort( 0x8 ),      /* x86, MIPS, PPC Stack size/offset
= 8 */
#else
              NdrFcShort( 0x10 ),      /* Alpha Stack size/offset =
16 */
#endif
/* 94 */      NdrFcShort( 0x18 ),      /* Type Offset=24 */

/* Return value */
/* 96 */      NdrFcShort( 0x70 ),      /* Flags: out, return, base type,
*/
#ifdef _ALPHA_
/* 98 */      NdrFcShort( 0xc ),      /* x86, MIPS, PPC Stack size/offset
= 12 */

```

```

#else
              NdrFcShort( 0x18 ),      /* Alpha Stack size/offset =
24 */
#endif
/* 100 */      0x8,      /* FC_LONG */
              0x0,      /* 0 */

/* Procedure StockLevel */
/* 102 */      0x33,      /* FC_AUTO_HANDLE */
              0x6c,      /* Old Flags: object, Oi2 */
/* 104 */      NdrFcLong( 0x0 ),      /* 0 */
/* 108 */      NdrFcShort( 0x6 ),      /* 6 */
#ifdef _ALPHA_
/* 110 */      NdrFcShort( 0x10 ),      /* x86, MIPS, PPC Stack size/offset
= 16 */
#else
              NdrFcShort( 0x20 ),      /* Alpha Stack size/offset =
32 */
#endif
/* 112 */      NdrFcShort( 0x8 ),      /* 8 */
/* 114 */      NdrFcShort( 0x10 ),      /* 16 */
/* 116 */      0x7,      /* Oi2 Flags: srv must size, clt must
size, has return, */
              0x3,      /* 3 */

/* Parameter iSize */
/* 118 */      NdrFcShort( 0x158 ),      /* Flags: in, out, base type,
simple ref, */
#ifdef _ALPHA_
/* 120 */      NdrFcShort( 0x4 ),      /* x86, MIPS, PPC Stack size/offset
= 4 */
#else
              NdrFcShort( 0x8 ),      /* Alpha Stack size/offset =
8 */
#endif
/* 122 */      0x8,      /* FC_LONG */
              0x0,      /* 0 */

/* Parameter txn */
/* 124 */      NdrFcShort( 0x201b ),      /* Flags: must size, must free, in,
out, srv alloc size=8 */
#ifdef _ALPHA_
/* 126 */      NdrFcShort( 0x8 ),      /* x86, MIPS, PPC Stack size/offset
= 8 */
#else
              NdrFcShort( 0x10 ),      /* Alpha Stack size/offset =
16 */
#endif
/* 128 */      NdrFcShort( 0x6 ),      /* Type Offset=6 */

```

```

        /* Return value */
/* 130 */      NdrFcShort( 0x70 ), /* Flags: out, return, base type,
*/
#ifdef _ALPHA_
/* 132 */      NdrFcShort( 0xc ), /* x86, MIPS, PPC Stack size/offset
= 12 */
#else
        NdrFcShort( 0x18 ), /* Alpha Stack size/offset =
24 */
#endif
/* 134 */      0x8, /* FC_LONG */
        0x0, /* 0 */

/* Procedure OrderStatus */

/* 136 */      0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
/* 138 */      NdrFcLong( 0x0 ), /* 0 */
/* 142 */      NdrFcShort( 0x7 ), /* 7 */
#ifdef _ALPHA_
/* 144 */      NdrFcShort( 0x10 ), /* x86, MIPS, PPC Stack size/offset
= 16 */
#else
        NdrFcShort( 0x20 ), /* Alpha Stack size/offset =
32 */
#endif
/* 146 */      NdrFcShort( 0x8 ), /* 8 */
/* 148 */      NdrFcShort( 0x10 ), /* 16 */
/* 150 */      0x7, /* Oi2 Flags: srv must size, clt must
size, has return, */
        0x3, /* 3 */

/* Parameter iSize */

/* 152 */      NdrFcShort( 0x158 ), /* Flags: in, out, base type,
simple ref, */
#ifdef _ALPHA_
/* 154 */      NdrFcShort( 0x4 ), /* x86, MIPS, PPC Stack size/offset
= 4 */
#else
        NdrFcShort( 0x8 ), /* Alpha Stack size/offset =
8 */
#endif
/* 156 */      0x8, /* FC_LONG */
        0x0, /* 0 */

/* Parameter txn */

/* 158 */      NdrFcShort( 0x201b ), /* Flags: must size, must free, in,
out, srv alloc size=8 */
#ifdef _ALPHA_

```

```

/* 160 */      NdrFcShort( 0x8 ), /* x86, MIPS, PPC Stack size/offset
= 8 */
#else
        NdrFcShort( 0x10 ), /* Alpha Stack size/offset =
16 */
#endif
/* 162 */      NdrFcShort( 0x6 ), /* Type Offset=6 */

/* Return value */

/* 164 */      NdrFcShort( 0x70 ), /* Flags: out, return, base type,
*/
#ifdef _ALPHA_
/* 166 */      NdrFcShort( 0xc ), /* x86, MIPS, PPC Stack size/offset
= 12 */
#else
        NdrFcShort( 0x18 ), /* Alpha Stack size/offset =
24 */
#endif
/* 168 */      0x8, /* FC_LONG */
        0x0, /* 0 */

/* Procedure CallSetComplete */

/* 170 */      0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
/* 172 */      NdrFcLong( 0x0 ), /* 0 */
/* 176 */      NdrFcShort( 0x8 ), /* 8 */
#ifdef _ALPHA_
/* 178 */      NdrFcShort( 0x8 ), /* x86, MIPS, PPC Stack size/offset
= 8 */
#else
        NdrFcShort( 0x10 ), /* Alpha Stack size/offset =
16 */
#endif
/* 180 */      NdrFcShort( 0x0 ), /* 0 */
/* 182 */      NdrFcShort( 0x8 ), /* 8 */
/* 184 */      0x4, /* Oi2 Flags: has return, */
        0x1, /* 1 */

/* Return value */

/* 186 */      NdrFcShort( 0x70 ), /* Flags: out, return, base type,
*/
#ifdef _ALPHA_
/* 188 */      NdrFcShort( 0x4 ), /* x86, MIPS, PPC Stack size/offset
= 4 */
#else
        NdrFcShort( 0x8 ), /* Alpha Stack size/offset =
8 */
#endif
/* 190 */      0x8, /* FC_LONG */
        0x0, /* 0 */

```

```

        0x0
    };

static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
    {
        NdrFcShort( 0x0 ), /* 0 */
/* 2 */
        0x11, 0x8, /* FC_RP [simple_pointer] */
/* 4 */
        0x8, /* FC_LONG */
        0x5c, /* FC_PAD */
/* 6 */
        0x11, 0x14, /* FC_RP [allocated_on_stack]
[pointer_deref] */
/* 8 */
        NdrFcShort( 0x2 ), /* Offset= 2 (10) */
/* 10 */
        0x13, 0x0, /* FC_OP */
/* 12 */
        NdrFcShort( 0x2 ), /* Offset= 2 (14) */
/* 14 */
        0x1b, /* FC_CARRAY */
        0x0, /* 0 */
/* 16 */
        NdrFcShort( 0x1 ), /* 1 */
/* 18 */
        0x28, /* Corr desc: parameter, FC_LONG */
        0x54, /* FC_DEREFERENCE */
#ifdef _ALPHA_
/* 20 */
        NdrFcShort( 0x4 ), /* x86, MIPS, PPC Stack size/offset
= 4 */
#else
        NdrFcShort( 0x8 ), /* Alpha Stack size/offset =
8 */
#endif
/* 22 */
        0x2, /* FC_CHAR */
        0x5b, /* FC_END */
/* 24 */
        0x11, 0x14, /* FC_RP [allocated_on_stack]
[pointer_deref] */
/* 26 */
        NdrFcShort( 0x2 ), /* Offset= 2 (28) */
/* 28 */
        0x12, 0x0, /* FC_UP */
/* 30 */
        NdrFcShort( 0xffffffff0 ), /* Offset= -16 (14) */

        0x0
    }
};

const CInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl * ) &_ITPCCProxyVtbl,
    0
};

```

```

const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl * ) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n) IID_GENERIC_CHECK_IID( _tpcc_com_ps,
pIID, n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName * ) &_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    &_tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* !defined(_M_IA64) && !defined(_M_AXP64)*/

#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the proxy stub code */

```

```

/* File created by MIDL compiler version 5.02.0235 */
/* at Fri Aug 13 18:56:18 1999
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run,appending), ms_ext,
c_ext
   error checks: allocation ref bounds_check enum stub_data
   VC __declspec() decoration level:
       __declspec(uuid()), __declspec(selectany), __declspec(novtable)
       DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING(  )

#if defined(_M_IA64) || defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high enough to compile this
file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of <rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 33
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 0

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short          Pad;
    unsigned char  Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short          Pad;
    unsigned char  Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

```

```

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x46}}
*/

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}}
*/

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{

```

```

&ITPCC_ProxyInfo,
&IID_ITPCC,
IUnknown_QueryInterface_Proxy,
IUnknown_AddRef_Proxy,
IUnknown_Release_Proxy ,
(void *)-1 /* ITPCC::NewOrder */ ,
(void *)-1 /* ITPCC::Payment */ ,
(void *)-1 /* ITPCC::Delivery */ ,
(void *)-1 /* ITPCC::StockLevel */ ,
(void *)-1 /* ITPCC::OrderStatus */ ,
(void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x20000, /* Ndr library version */
    0,
    0x50200eb, /* MIDL Version 5.2.235 */
    0,
    0,
    0, /* notify & notify_flag routine table */
    1, /* Flags */
    0, /* Reserved3 */
    0, /* Reserved4 */
    0 /* Reserved5 */
};

#pragma data_seg(".rdata")

#if !defined(__RPC_WIN64__)
#error Invalid build platform for this stub.
#endif

```

```

static const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */

        0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */

        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
        /* 8 */ NdrFcShort( 0x20 ), /* ia64, axp64 Stack size/offset =
32 */
        /* 10 */ NdrFcShort( 0x8 ), /* 8 */
        /* 12 */ NdrFcShort( 0x10 ), /* 16 */
        /* 14 */ 0x7, /* Oi2 Flags: srv must size, clt must
size, has return, */
        0x3, /* 3 */

        /* Parameter iSize */

        /* 16 */ NdrFcShort( 0x158 ), /* Flags: in, out, base type,
simple ref, */
        /* 18 */ NdrFcShort( 0x8 ), /* ia64, axp64 Stack size/offset = 8
*/
        /* 20 */ 0x8, /* FC_LONG */
        0x0, /* 0 */

        /* Parameter txn */

        /* 22 */ NdrFcShort( 0x201b ), /* Flags: must size, must free, in,
out, srv alloc size=8 */
        /* 24 */ NdrFcShort( 0x10 ), /* ia64, axp64 Stack size/offset =
16 */
        /* 26 */ NdrFcShort( 0x6 ), /* Type Offset=6 */

        /* Return value */

        /* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type,
*/
        /* 30 */ NdrFcShort( 0x18 ), /* ia64, axp64 Stack size/offset =
24 */
        /* 32 */ 0x8, /* FC_LONG */
        0x0, /* 0 */

        /* Procedure Payment */

        /* 34 */ 0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */

        /* 36 */ NdrFcLong( 0x0 ), /* 0 */
        /* 40 */ NdrFcShort( 0x4 ), /* 4 */
        /* 42 */ NdrFcShort( 0x20 ), /* ia64, axp64 Stack size/offset =
32 */

```

```

/* 44 */      NdrFcShort( 0x8 ),      /* 8 */
/* 46 */      NdrFcShort( 0x10 ),     /* 16 */
/* 48 */      0x7,                    /* Oi2 Flags: srv must size, clt must
size, has return, */
                0x3,                    /* 3 */

/* Parameter iSize */

/* 50 */      NdrFcShort( 0x158 ),     /* Flags: in, out, base type,
simple ref, */
/* 52 */      NdrFcShort( 0x8 ),       /* ia64, axp64 Stack size/offset = 8
*/
/* 54 */      0x8,                    /* FC_LONG */
                0x0,                    /* 0 */

/* Parameter txn */

/* 56 */      NdrFcShort( 0x201b ),    /* Flags: must size, must free, in,
out, srv alloc size=8 */
/* 58 */      NdrFcShort( 0x10 ),     /* ia64, axp64 Stack size/offset =
16 */
/* 60 */      NdrFcShort( 0x6 ),       /* Type Offset=6 */

/* Return value */

/* 62 */      NdrFcShort( 0x70 ),     /* Flags: out, return, base type,
*/
/* 64 */      NdrFcShort( 0x18 ),     /* ia64, axp64 Stack size/offset =
24 */
/* 66 */      0x8,                    /* FC_LONG */
                0x0,                    /* 0 */

/* Procedure Delivery */

/* 68 */      0x33,                   /* FC_AUTO_HANDLE */
                0x6c,                   /* Old Flags: object, Oi2 */
/* 70 */      NdrFcLong( 0x0 ),        /* 0 */
/* 74 */      NdrFcShort( 0x5 ),       /* 5 */
/* 76 */      NdrFcShort( 0x20 ),     /* ia64, axp64 Stack size/offset =
32 */
/* 78 */      NdrFcShort( 0x8 ),       /* 8 */
/* 80 */      NdrFcShort( 0x8 ),       /* 8 */
/* 82 */      0x6,                    /* Oi2 Flags: clt must size, has return,
*/
                0x3,                    /* 3 */

/* Parameter iSize */

/* 84 */      NdrFcShort( 0x148 ),     /* Flags: in, base type, simple
ref, */
/* 86 */      NdrFcShort( 0x8 ),       /* ia64, axp64 Stack size/offset = 8
*/
/* 88 */      0x8,                    /* FC_LONG */

```

```

                0x0,                    /* 0 */

/* Parameter txn */

/* 90 */      NdrFcShort( 0x200b ),    /* Flags: must size, must free, in,
srv alloc size=8 */
/* 92 */      NdrFcShort( 0x10 ),     /* ia64, axp64 Stack size/offset =
16 */
/* 94 */      NdrFcShort( 0x18 ),     /* Type Offset=24 */

/* Return value */

/* 96 */      NdrFcShort( 0x70 ),     /* Flags: out, return, base type,
*/
/* 98 */      NdrFcShort( 0x18 ),     /* ia64, axp64 Stack size/offset =
24 */
/* 100 */     0x8,                    /* FC_LONG */
                0x0,                    /* 0 */

/* Procedure StockLevel */

/* 102 */     0x33,                   /* FC_AUTO_HANDLE */
                0x6c,                   /* Old Flags: object, Oi2 */
/* 104 */     NdrFcLong( 0x0 ),        /* 0 */
/* 108 */     NdrFcShort( 0x6 ),       /* 6 */
/* 110 */     NdrFcShort( 0x20 ),     /* ia64, axp64 Stack size/offset =
32 */
/* 112 */     NdrFcShort( 0x8 ),       /* 8 */
/* 114 */     NdrFcShort( 0x10 ),     /* 16 */
/* 116 */     0x7,                    /* Oi2 Flags: srv must size, clt must
size, has return, */
                0x3,                    /* 3 */

/* Parameter iSize */

/* 118 */     NdrFcShort( 0x158 ),     /* Flags: in, out, base type,
simple ref, */
/* 120 */     NdrFcShort( 0x8 ),       /* ia64, axp64 Stack size/offset = 8
*/
/* 122 */     0x8,                    /* FC_LONG */
                0x0,                    /* 0 */

/* Parameter txn */

/* 124 */     NdrFcShort( 0x201b ),    /* Flags: must size, must free, in,
out, srv alloc size=8 */
/* 126 */     NdrFcShort( 0x10 ),     /* ia64, axp64 Stack size/offset =
16 */
/* 128 */     NdrFcShort( 0x6 ),       /* Type Offset=6 */

/* Return value */

```

```

/* 130 */      NdrFcShort( 0x70 ), /* Flags: out, return, base type,
*/
/* 132 */      NdrFcShort( 0x18 ), /* ia64, axp64 Stack size/offset =
24 */
/* 134 */      0x8, /* FC_LONG */
                0x0, /* 0 */

/* Procedure OrderStatus */

/* 136 */      0x33, /* FC_AUTO_HANDLE */
                0x6c, /* Old Flags: object, Oi2 */
/* 138 */      NdrFcLong( 0x0 ), /* 0 */
/* 142 */      NdrFcShort( 0x7 ), /* 7 */
/* 144 */      NdrFcShort( 0x20 ), /* ia64, axp64 Stack size/offset =
32 */
/* 146 */      NdrFcShort( 0x8 ), /* 8 */
/* 148 */      NdrFcShort( 0x10 ), /* 16 */
/* 150 */      0x7, /* Oi2 Flags: srv must size, clt must
size, has return, */
                0x3, /* 3 */

/* Parameter iSize */

/* 152 */      NdrFcShort( 0x158 ), /* Flags: in, out, base type,
simple ref, */
/* 154 */      NdrFcShort( 0x8 ), /* ia64, axp64 Stack size/offset = 8
*/
/* 156 */      0x8, /* FC_LONG */
                0x0, /* 0 */

/* Parameter txn */

/* 158 */      NdrFcShort( 0x201b ), /* Flags: must size, must free, in,
out, srv alloc size=8 */
/* 160 */      NdrFcShort( 0x10 ), /* ia64, axp64 Stack size/offset =
16 */
/* 162 */      NdrFcShort( 0x6 ), /* Type Offset=6 */

/* Return value */

/* 164 */      NdrFcShort( 0x70 ), /* Flags: out, return, base type,
*/
/* 166 */      NdrFcShort( 0x18 ), /* ia64, axp64 Stack size/offset =
24 */
/* 168 */      0x8, /* FC_LONG */
                0x0, /* 0 */

/* Procedure CallSetComplete */

/* 170 */      0x33, /* FC_AUTO_HANDLE */
                0x6c, /* Old Flags: object, Oi2 */
/* 172 */      NdrFcLong( 0x0 ), /* 0 */
/* 176 */      NdrFcShort( 0x8 ), /* 8 */

/* 178 */      NdrFcShort( 0x10 ), /* ia64, axp64 Stack size/offset =
16 */
/* 180 */      NdrFcShort( 0x0 ), /* 0 */
/* 182 */      NdrFcShort( 0x8 ), /* 8 */
/* 184 */      0x4, /* Oi2 Flags: has return, */
                0x1, /* 1 */

/* Return value */

/* 186 */      NdrFcShort( 0x70 ), /* Flags: out, return, base type,
*/
/* 188 */      NdrFcShort( 0x8 ), /* ia64, axp64 Stack size/offset = 8
*/
/* 190 */      0x8, /* FC_LONG */
                0x0, /* 0 */
                0x0

    }
};

static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /* 0 */
/* 2 */
        0x11, 0x8, /* FC_RP [simple_pointer] */
/* 4 */      0x8, /* FC_LONG */
        0x5c, /* FC_PAD */
/* 6 */
        0x11, 0x14, /* FC_RP [allocated_on_stack]
[pointer_deref] */
/* 8 */      NdrFcShort( 0x2 ), /* Offset= 2 (10) */
/* 10 */
        0x13, 0x0, /* FC_OP */
/* 12 */      NdrFcShort( 0x2 ), /* Offset= 2 (14) */
/* 14 */
        0x1b, /* FC_CARRAY */
        0x0, /* 0 */
/* 16 */      NdrFcShort( 0x1 ), /* 1 */
/* 18 */      0x28, /* Corr desc: parameter, FC_LONG */
        0x54, /* FC_DEREFERENCE */
/* 20 */      NdrFcShort( 0x8 ), /* ia64, axp64 Stack size/offset = 8
*/
/* 22 */      0x2, /* FC_CHAR */
        0x5b, /* FC_END */
/* 24 */
        0x11, 0x14, /* FC_RP [allocated_on_stack]
[pointer_deref] */
/* 26 */      NdrFcShort( 0x2 ), /* Offset= 2 (28) */
/* 28 */
        0x12, 0x0, /* FC_UP */
/* 30 */      NdrFcShort( 0xfffffff0 ), /* Offset= -16 (14) */

```



```

        }
        };

const CInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)    IID_GENERIC_CHECK_IID( _tpcc_com_ps,
pIID, n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName * ) &_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    &_tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

```

```

#endif /* defined(_M_IA64) || defined(_M_AXP64)*/

```

## Appendix B - Database Details

### BACKUP.SQL

```
-- File:      BACKUP.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates backup of tpcc database

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

dump database tpcc to tpccback1, tpccback2 with init, stats = 1

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go
```

### BACKUPDEV.SQL

```
-- File:      BACKUPDEVB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates tpcc database Backup Devices

use master
go

-- create backup devices

exec sp_addumpdevice 'disk','tpccback1','X:\tpccback1.dmp'
exec sp_addumpdevice 'disk','tpccback2','Y:\tpccback2.dmp'

go
```

### CREATEDB.SQL

```
-- File:      CREATEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates tpcc database and backup files
```

```
use master
go

-- Create temporary table for timing

if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer
go

create table tpcc_timer
(
    start_date          char(30),
    end_date            char(30)
)

insert into tpcc_timer values (0,0)
go

-- Store starting time

update tpcc_timer
set start_date = (select convert(char(30), getdate(),9))
go

-- create main database files

CREATE DATABASE tpcc
ON PRIMARY
(
    NAME          = MSSQL70_tpcc_root,
    FILENAME      = "C:\MSSQL7\DATA\tpcc_root.mdf",
    SIZE          = 10MB,
    FILEGROWTH    = 0),
FILEGROUP MSSQL70_cs_fg
(
    NAME          = MSSQL70_cs1,
    FILENAME      = "E:",
    SIZE          = 23500MB,
    FILEGROWTH    = 0),
(
    NAME          = MSSQL70_cs2,
    FILENAME      = "F:",
    SIZE          = 23500MB,
    FILEGROWTH    = 0),
(
    NAME          = MSSQL70_cs3,
    FILENAME      = "G:",
    SIZE          = 23500MB,
```

```

FILEGROWTH = 0),
(
NAME = MSSQL70_cs4,
FILENAME = "H:",
SIZE = 23500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_cs5,
FILENAME = "I:",
SIZE = 23500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_cs6,
FILENAME = "J:",
SIZE = 23500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_cs7,
FILENAME = "K:",
SIZE = 23500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_cs8,
FILENAME = "M:",
SIZE = 23500MB,
FILEGROWTH = 0),
FILEGROUP MSSQL70_misc_fg
(
NAME = MSSQL70_misc1,
FILENAME = "N:",
SIZE = 13500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_misc2,
FILENAME = "O:",
SIZE = 13500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_misc3,
FILENAME = "P:",
SIZE = 13500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_misc4,
FILENAME = "Q:",
SIZE = 13500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_misc5,
FILENAME = "R:",
SIZE = 13500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_misc6,
FILENAME = "S:",
SIZE = 13500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_misc7,
FILENAME = "T:",
SIZE = 13500MB,
FILEGROWTH = 0),
(
NAME = MSSQL70_misc8,
FILENAME = "U:",
SIZE = 13500MB,

```

```

FILEGROWTH = 0)
LOG ON
(
NAME =MSSQL70_tpcc_log,
FILENAME = "L:",
SIZE =50000MB,
FILEGROWTH =0)
go
-- Store ending time
update tpcc_timer
set end_date = (select convert(char(30), getdate(),9))
go
select "Elapsed time (in seconds): ", datediff(second,(select start_date
from tpcc_timer),(select end_date from tpcc_timer))
-- remove temporary table
if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer
go

```

## DBOPT1.SQL

```

-- File: DBOPT1.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.20
-- Copyright Microsoft, 1999
-- Purpose: Sets database options for data load

```

```

use master
go
exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
go
use tpcc
go
checkpoint
go

```

## DBOPT2.SQL

```

-- File: DBOPT2.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.20

```

```

--          Copyright Microsoft, 1999
-- Purpose:  Resets database options after data load

use master
go

sp_dboption tpcc,'select ',false
go

sp_dboption tpcc,'trunc. ',false
go

use tpcc
go

checkpoint
go

sp_configure allow,1
go

reconfigure with override
go

/*          */
/* Set option values for user-defined indexes */
/*          */

sp_indexoption 'customer',    'AllowPageLocks',    FALSE
go
sp_indexoption 'district',    'AllowPageLocks',    FALSE
go
sp_indexoption 'warehouse',   'AllowPageLocks',    FALSE
go
sp_indexoption 'stock',       'AllowPageLocks',    FALSE
go
sp_indexoption 'order_line',  'AllowRowLocks',    FALSE
go
sp_indexoption 'orders',      'AllowRowLocks',    FALSE
go
sp_indexoption 'new_order',   'AllowRowLocks',    FALSE
go
sp_indexoption 'item',        'AllowRowLocks',    FALSE
go
sp_indexoption 'item',        'AllowPageLocks',    FALSE
go

Print ' '
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print '  Lockflag = 0 ==> No pre-specified hierarchy'
Print '  Lockflag = 1 ==> Lock at Page-level then Table-level'

```

```

Print '  Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '  Lockflag = 3 ==> Lock at Table-level'
Print ' '

select name,lockflags
from   sysindexes
where  object_id("warehouse") = id or
       object_id("district") = id or
       object_id("customer") = id or
       object_id("stock")     = id or
       object_id("orders")   = id or
       object_id("order_line") = id or
       object_id("history")  = id or
       object_id("new_order") = id or
       object_id("item")     = id

order  by lockflags asc
go

sp_configure allow,0
go

reconfigure with override
go

exec sp_dboption tpcc, 'auto update statistics',    FALSE
exec sp_dboption tpcc, 'auto create statistics',    FALSE
go

exec sp_tableoption "district",    "pintable",true
exec sp_tableoption "warehouse",   "pintable",true
exec sp_tableoption "new_order",   "pintable",true
exec sp_tableoption "item",        "pintable",true
go

REMOVEDB.SQL

-- File:      REMOVEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Removes tpcc database and backup files

use master
go

-- remove any existing database and backup files

exec sp_dbremove tpcc, dropdev
go

exec sp_dropdevice 'tpccback1'
exec sp_dropdevice 'tpccback2'
go

```

## RESTORE.SQL

```
-- File:      RESTORE.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Loads database backup from backup files

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

load database tpcc from tpcback1, tpcback2, with stats = 1

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go
```

## RUNCFG70.SQL

```
/* TPC-C Benchmark Kit
*/
/*
*/
/* RUNCFG70.SQL
*/
/*
*/
/* This script file is used to set runtime server configuration
parameters */
/*
*/

exec sp_configure "show advanced option", 1
go

reconfigure with override
go

/* ensures sufficient I/O bandwidth is generated by SQL Server */
exec sp_configure "max async IO",255

/* change this value to approximately the number of connected users */
exec sp_configure "max worker threads",255

/* increase priority of user threads */
exec sp_configure "priority boost",1
```

```
/* disable automatic checkpointing */
exec sp_configure "recovery interval",32767

/* change to a mask appropriate for the number of processors on the server
*/
exec sp_configure "affinity mask",0xf

/* enable fibers */
exec sp_configure "lightweight pooling",1

go

reconfigure with override
go
```

## SQLSHUTDOWN.SQL

```
use tpcc
go
checkpoint
go
shutdown
go
```

## VERIFY\_BUILD.SQL

```
-- File:      VERIFY_BUILD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Verifies the SQL Server Version

if exists (select name from sysobjects where name = "ms_verify_build" )
    drop procedure ms_verify_build

go

create proc ms_verify_build

as

declare @version_num char(8),
        @good_build int

-- store the version of SQL Server you are running
select @version_num = SUBSTRING((select @@version),30,8)

if (select CAST(SUBSTRING(@version_num,3,2) AS int)) < 10
    begin
        if (select CAST(SUBSTRING(@version_num,6,3) AS int)) < 623
            RAISERROR (50001,11,1)
        end
```

```

else
  begin
    if (select CAST(SUBSTRING(@version_num,6,3) AS int)) < 100
      RAISERROR (50002,11,1)
    end
  go

```

### VERIFY\_MSG.SQL

```

exec sp_dropmessage 50001
exec sp_dropmessage 50002
exec sp_dropmessage 50003
exec sp_addmessage 50001, 1,"Incorrect SQL Server Build - You must run
7.00.623 or higher"
exec sp_addmessage 50002, 1,"Incorrect SQL Server Build - You must run
7.10.100 or higher"
exec sp_addmessage 50003, 1,"Incorrect Sort Order - Please re-install SQL
Server with the Binary Sort Order"

```

### VERIFY\_SORT.SQL

```

-- File:      VERIFY_SORT.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Verifies the Sort Order

if exists (select name from sysobjects where name = "ms_verify_sort" )
  drop procedure ms_verify_sort
go

create proc ms_verify_sort
as

declare @sort_order  int

-- get the sort order
select @sort_order  = (select value from sysconfigures where config =
'1123')

if (select @sort_order) <> 50
  RAISERROR (50003,11,1)
go

```

### VERIFYTPCCLOAD.SQL

```

-- File:      VERIFYTPCCLOAD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Performs series of TPC-C database checks to verify
--           that database load completed correctly

```

```

print " "
select convert(char(30), getdate(),9)
print " "

use tpcc
go

-- *****
-- Check rows per table from SYSINDEXES
-- *****

print 'WAREHOUSE TABLE'

select rows
from sysindexes
where id = object_id("warehouse")
go

print 'DISTRICT TABLE = (10 * No of warehouses)'

select rows
from sysindexes
where id =object_id("district")
go

print 'ITEM TABLE = 100,000'

select rows
from sysindexes
where id =object_id("item")
go

print 'CUSTOMER TABLE = (30,000 * No of warehouses)'

select rows
from sysindexes
where id =object_id("customer")
go

print 'ORDERS TABLE = (30,000 * No of warehouses)'

select rows
from sysindexes
where id =object_id("orders")
go

print 'HISTORY TABLE = (30,000 * No of warehouses)'

select rows
from sysindexes

```

```

where id      =object_id("history")
go

print 'STOCK TABLE = (100,000 * No of warehouses)'
```

```

select rows
from sysindexes
where id      =object_id("stock")
go

print 'ORDER_LINE TABLE = (300,000 * No of warehouses + some change)'
```

```

select rows
from sysindexes
where id      =object_id("order_line")
go

print 'NEW_ORDER TABLE = (9000 * No of warehouses)'
```

```

select rows
from sysindexes
where id      =object_id("new_order")
go

-- *****
-- Check indices
-- *****

print '*****Index Check*****'
```

```

use tpcc
go

sp_helpindex customer
go

sp_helpindex stock
go

sp_helpindex district
go

sp_helpindex item
go

sp_helpindex new_order
go

sp_helpindex orders
go
```

```
sp_helpindex order_line
go
```

```
sp_helpindex warehouse
go
```

## IDXCUSCL.SQL

```

-- File:      IDXCUSCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates clustered index on customer table
```

```
use tpcc
go
```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```

if exists ( select name from sysindexes where name = 'customer_cl' )
drop index customer.customer_cl
```

```

create unique clustered index customer_cl on customer(c_w_id, c_d_id,
c_id)
on MSSQL70_cs_fg
```

```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
```

```
go
```

## IDXCUSNC.SQL

```

-- File:      IDXCUSNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates non-clustered index on customer table
```

```
use tpcc
go
```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```

if exists ( select name from sysindexes where name = 'customer_nc1' )
    drop index customer.customer_nc1

create unique nonclustered index customer_nc1 on customer(c_w_id, c_d_id,
c_last, c_first, c_id)
    on MSSQL70_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## IDXDISCL.SQL

```

-- File:      IDXDISCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates clustered index on district table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'district_c1' )
    drop index district.district_c1

create unique clustered index district_c1 on district(d_w_id, d_id)
    with fillfactor=100 on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## IDXITMCL.SQL

```

-- File:      IDXITMCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20

```

```

--           Copyright Microsoft, 1999
-- Purpose:   Creates clustered index on item table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'item_c1' )
    drop index item.item_c1

create unique clustered index item_c1 on item(i_id)
    on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## IDXNODCL.SQL

```

-- File:      IDXNODCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates clustered index on new_order table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'new_order_c1' )
    drop index new_order.new_order_c1

create unique clustered index new_order_c1 on new_order(no_w_id, no_d_id,
no_o_id)
    on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

```



```
go
```

## IDXODLCL.SQL

```
-- File:      IDXODLCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates clustered index on order_line table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'order_line_c1' )
    drop index order_line.order_line_c1
```

```
create unique clustered index order_line_c1 on order_line(ol_w_id,
ol_d_id, ol_o_id, ol_number)
on MSSQL70_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
```

```
go
```

## IDXORDCL.SQL

```
-- File:      IDXORDCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates clustered index on orders table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'orders_c1' )
```

```
drop index orders.orders_c1
```

```
create unique clustered index orders_c1 on orders(o_w_id, o_d_id, o_id)
on MSSQL70_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
```

```
go
```

## IDXORDNC.SQL

```
-- File:      IDXORDNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates non-clustered index on orders table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'orders_nc1' )
    drop index orders.orders_nc1
```

```
create index orders_nc1 on orders(o_w_id, o_d_id, o_c_id, o_id)
on MSSQL70_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
```

```
go
```

## IDXSTKCL.SQL

```
-- File:      IDXSTKCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates clustered index on stock table
```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'stock_c1' )
    drop index stock.stock_c1

create unique clustered index stock_c1 on stock(s_i_id, s_w_id)
    on MSSQL70_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## IDXWARCL.SQL

```

-- File:      IDXWARCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates clustered index on warehouse table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'warehouse_c1' )
    drop index warehouse.warehouse_c1

create unique clustered index warehouse_c1 on warehouse(w_id)
    with fillfactor=100 on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## TABLES.SQL

```

-- File:      TABLES.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Creates TPC-C tables

use tpcc
go

-- Remove all existing TPC-C tables
--

if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
if exists ( select name from sysobjects where name = 'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )
    drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
    drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
    drop table stock
go

-- Create new tables
--

create table warehouse
(
    w_id                smallint,
    w_name              char(10),
    w_street_1          char(20),
    w_street_2          char(20),

```

```

        w_city                char(20),
        w_state               char(2),
        w_zip                 char(9),
        w_tax                 numeric(4,4),
        w_ytd                 numeric(12,2)
) on MSSQL70_misc_fg
go

create table district
(
    d_id                     tinyint,
    d_w_id                   smallint,
    d_name                   char(10),
    d_street_1               char(20),
    d_street_2               char(20),
    d_city                   char(20),
    d_state                  char(2),
    d_zip                    char(9),
    d_tax                    numeric(4,4),
    d_ytd                    numeric(12,2),
    d_next_o_id              int
) on MSSQL70_misc_fg
go

create table customer
(
    c_id                     int,
    c_d_id                   tinyint,
    c_w_id                   smallint,
    c_first                  char(16),
    c_middle                 char(2),
    c_last                   char(16),
    c_street_1               char(20),
    c_street_2               char(20),
    c_city                   char(20),
    c_state                  char(2),
    c_zip                    char(9),
    c_phone                  char(16),
    c_since                  datetime,
    c_credit                 char(2),
    c_credit_lim             numeric(12,2),
    c_discount               numeric(4,4),
    c_balance                numeric(12,2),
    c_ytd_payment            numeric(12,2),
    c_payment_cnt            smallint,
    c_delivery_cnt           smallint,
    c_data                   char(500)
) on MSSQL70_cs_fg
go

create table history
(
    h_c_id                   int,

```

```

        h_c_d_id              tinyint,
        h_c_w_id              smallint,
        h_d_id                tinyint,
        h_w_id                smallint,
        h_date                datetime,
        h_amount              numeric(6,2),
        h_data                char(24)
) on MSSQL70_misc_fg
go

create table new_order
(
    no_o_id                  int,
    no_d_id                  tinyint,
    no_w_id                  smallint
) on MSSQL70_misc_fg
go

create table orders
(
    o_id                     int,
    o_d_id                   tinyint,
    o_w_id                   smallint,
    o_c_id                   int,
    o_entry_d                datetime,
    o_carrier_id             tinyint,
    o_ol_cnt                 tinyint,
    o_all_local              tinyint
) on MSSQL70_misc_fg
go

create table order_line
(
    ol_o_id                  int,
    ol_d_id                  tinyint,
    ol_w_id                  smallint,
    ol_number                tinyint,
    ol_i_id                  int,
    ol_supply_w_id           smallint,
    ol_delivery_d            datetime,
    ol_quantity              smallint,
    ol_amount                numeric(6,2),
    ol_dist_info             char(24)
) on MSSQL70_misc_fg
go

create table item
(
    i_id                     int,
    i_im_id                  int,
    i_name                   char(24),
    i_price                  numeric(5,2),
    i_data                   char(50)

```

```

) on MSSQL70_misc_fg
go

create table stock
(
    s_i_id            int,
    s_w_id            smallint,
    s_quantity        smallint,
    s_dist_01         char(24),
    s_dist_02         char(24),
    s_dist_03         char(24),
    s_dist_04         char(24),
    s_dist_05         char(24),
    s_dist_06         char(24),
    s_dist_07         char(24),
    s_dist_08         char(24),
    s_dist_09         char(24),
    s_dist_10         char(24),
    s_ytd             int,
    s_order_cnt       smallint,
    s_remote_cnt      smallint,
    s_data            char(50)
) on MSSQL70_cs_fg
go

```

## DELIVERY.SQL

```

-- File:      DELIVERY.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.20.000
--            Copyright Microsoft, 1999
-- Purpose:   Creates delivery transaction stored procedure
--
--            Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_delivery" )
    drop procedure tpcc_delivery
go

create proc tpcc_delivery    @w_id            smallint,
                             @o_carrier_id    smallint
as

declare @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
        @oid3 int,

```

```

        @oid4 int,
        @oid5 int,
        @oid6 int,
        @oid7 int,
        @oid8 int,
        @oid9 int,
        @oid10 int

select @d_id = 0

begin tran d

    while (@d_id < 10)
    begin

        select @d_id = @d_id + 1,
               @total = 0,
               @o_id = 0

        select top 1
               @o_id = no_o_id
        from   new_order (serializable uplock)
        where  no_w_id = @w_id and
               no_d_id = @d_id
        order  by no_o_id asc

        if (@@rowcount <> 0)
        begin

-- claim the order for this district

            delete new_order
            where  no_w_id = @w_id and
                   no_d_id = @d_id and
                   no_o_id = @o_id

-- set carrier_id on this order (and get customer id)

            update orders
            set    o_carrier_id = @o_carrier_id,
                   @c_id       = o_c_id
            where  o_w_id       = @w_id and
                   o_d_id       = @d_id and
                   o_id         = @o_id

-- set date in all lineitems for this order (and sum amounts)

            update order_line
            set    ol_delivery_d = getdate(),
                   @total       = @total + ol_amount
            where  ol_w_id       = @w_id and
                   ol_d_id       = @d_id and
                   ol_o_id       = @o_id

```

```

-- accumulate lineitem amounts for this order into customer

        update customer
        set      c_balance      = c_balance + @total,
               c_delivery_cnt = c_delivery_cnt + 1

        where   c_w_id         = @w_id and
               c_d_id         = @d_id and
               c_id           = @c_id

    end

    select @oid1 = case @d_id when 1 then @o_id else @oid1 end,
           @oid2 = case @d_id when 2 then @o_id else @oid2 end,
           @oid3 = case @d_id when 3 then @o_id else @oid3 end,
           @oid4 = case @d_id when 4 then @o_id else @oid4 end,
           @oid5 = case @d_id when 5 then @o_id else @oid5 end,
           @oid6 = case @d_id when 6 then @o_id else @oid6 end,
           @oid7 = case @d_id when 7 then @o_id else @oid7 end,
           @oid8 = case @d_id when 8 then @o_id else @oid8 end,
           @oid9 = case @d_id when 9 then @o_id else @oid9 end,
           @oid10 = case @d_id when 10 then @o_id else @oid10 end

    end

commit tran d

-- return delivery data to client

select @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10

go

```

## NEWORD.SQL

```

-- File:      NEWORD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20.000
--           Copyright Microsoft, 1999
-- Purpose:   Creates new order transaction stored procedure
--
--           Interface Level: 4.10.000

use tpcc

```

```

go

if exists ( select name from sysobjects where name = "tpcc_neworder" )
    drop procedure tpcc_neworder
go

create proc tpcc_neworder
    @w_id      smallint,
    @d_id      tinyint,
    @c_id      int,
    @o_ol_cnt  tinyint,
    @o_all_local tinyint,
    @i_id1     int = 0, @s_w_id1  smallint
    @i_id2     int = 0, @s_w_id2  smallint
    @i_id3     int = 0, @s_w_id3  smallint
    @i_id4     int = 0, @s_w_id4  smallint
    @i_id5     int = 0, @s_w_id5  smallint
    @i_id6     int = 0, @s_w_id6  smallint
    @i_id7     int = 0, @s_w_id7  smallint
    @i_id8     int = 0, @s_w_id8  smallint
    @i_id9     int = 0, @s_w_id9  smallint
    @i_id10    int = 0, @s_w_id10  smallint
    @i_id11    int = 0, @s_w_id11  smallint
    @i_id12    int = 0, @s_w_id12  smallint
    @i_id13    int = 0, @s_w_id13  smallint
    @i_id14    int = 0, @s_w_id14  smallint
    @i_id15    int = 0, @s_w_id15  smallint

    = 0, @ol_qty1  smallint = 0,
    = 0, @ol_qty2  smallint = 0,
    = 0, @ol_qty3  smallint = 0,
    = 0, @ol_qty4  smallint = 0,
    = 0, @ol_qty5  smallint = 0,
    = 0, @ol_qty6  smallint = 0,
    = 0, @ol_qty7  smallint = 0,
    = 0, @ol_qty8  smallint = 0,
    = 0, @ol_qty9  smallint = 0,
    = 0, @ol_qty10 smallint = 0,
    = 0, @ol_qty11 smallint = 0,
    = 0, @ol_qty12 smallint = 0,
    = 0, @ol_qty13 smallint = 0,
    = 0, @ol_qty14 smallint = 0,
    = 0, @ol_qty15 smallint = 0

as
declare @w_tax      numeric(4,4),
        @d_tax      numeric(4,4),
        @c_last     char(16),
        @c_credit   char(2),
        @c_discount  numeric(4,4),
        @i_price     numeric(5,2),
        @i_name      char(24),
        @i_data      char(50),

```

```

    @o_entry_d      datetime,
    @remote_flag    int,
    @s_quantity     smallint,
    @s_data         char(50),
    @s_dist         char(24),
    @li_no          int,
    @o_id           int,
    @commit_flag    tinyint,
    @li_id          int,
    @li_s_w_id      smallint,
    @li_qty         smallint,
    @ol_number      int,
    @c_id_local     int

begin
begin transaction n

-- get district tax and next available order id and update
-- plus initialize local variables

    update district
    set   @d_tax      = d_tax,
         @o_id       = d_next_o_id,
         d_next_o_id = d_next_o_id + 1,
         @o_entry_d  = getdate(),
         @li_no      = 0,
         @commit_flag = 1
    where d_w_id     = @w_id and
         d_id       = @d_id

-- process orderlines

    while (@li_no < @o_ol_cnt)
    begin

        select @li_no = @li_no + 1

-- set i_id, s_w_id, and qty for this lineitem

        select @li_id = case @li_no
            when 1 then @i_id1
            when 2 then @i_id2
            when 3 then @i_id3
            when 4 then @i_id4
            when 5 then @i_id5
            when 6 then @i_id6
            when 7 then @i_id7
            when 8 then @i_id8
            when 9 then @i_id9
            when 10 then @i_id10
            when 11 then @i_id11
            when 12 then @i_id12

```

```

            when 13 then @i_id13
            when 14 then @i_id14
            when 15 then @i_id15
        end,

        @li_s_w_id = case @li_no
            when 1 then @s_w_id1
            when 2 then @s_w_id2
            when 3 then @s_w_id3
            when 4 then @s_w_id4
            when 5 then @s_w_id5
            when 6 then @s_w_id6
            when 7 then @s_w_id7
            when 8 then @s_w_id8
            when 9 then @s_w_id9
            when 10 then @s_w_id10
            when 11 then @s_w_id11
            when 12 then @s_w_id12
            when 13 then @s_w_id13
            when 14 then @s_w_id14
            when 15 then @s_w_id15
        end,

        @li_qty = case @li_no
            when 1 then @ol_qty1
            when 2 then @ol_qty2
            when 3 then @ol_qty3
            when 4 then @ol_qty4
            when 5 then @ol_qty5
            when 6 then @ol_qty6
            when 7 then @ol_qty7
            when 8 then @ol_qty8
            when 9 then @ol_qty9
            when 10 then @ol_qty10
            when 11 then @ol_qty11
            when 12 then @ol_qty12
            when 13 then @ol_qty13
            when 14 then @ol_qty14
            when 15 then @ol_qty15
        end

-- get item data (no one updates item)

        select @i_price = i_price,
             @i_name   = i_name,
             @i_data   = i_data
        from   item (tablock repeatableread)
        where  i_id = @li_id

-- update stock values

        update stock
        set   s_ytd      = s_ytd + @li_qty,

```

```

@s_quantity = s_quantity = s_quantity -
@li_qty +
@s_quantity = s_quantity -
case when (s_quantity -
@s_order_cnt = s_order_cnt + 1,
s_remote_cnt = s_remote_cnt + case when
(@li_s_w_id = @w_id) then 0 else 1 end,
@s_data,
@s_dist = case @d_id
when 1 then s_dist_01
when 2 then s_dist_02
when 3 then s_dist_03
when 4 then s_dist_04
when 5 then s_dist_05
when 6 then s_dist_06
when 7 then s_dist_07
when 8 then s_dist_08
when 9 then s_dist_09
when 10 then s_dist_10
end
where s_i_id = @li_id and
s_w_id = @li_s_w_id

-- if there actually is a stock (and item) with these ids, go to work
if (@@rowcount > 0)
begin
-- insert order_line data (using data from item and stock)
insert into order_line values(@o_id,
@d_id,
@w_id,
@li_no,
@li_id,
@li_s_w_id,
"dec 31, 1899",
@li_qty,
@i_price * @li_qty,
@s_dist)

-- send line-item data to client
select @i_name,
@s_quantity,
b_g = case when (
(patindex("%ORIGINAL%",@i_data) > 0) and
(patindex("%ORIGINAL%",@s_data) > 0) )
then "B" else "C" end,
@i_price,
@i_price * @li_qty
end
else
begin
-- no item (or stock) found - triggers rollback condition
select "",0,"",0,0
select @commit_flag = 0
end
end
-- get customer last name, discount, and credit rating
select @c_last = c_last,
@c_discount = c_discount,
@c_credit = c_credit,
@c_id_local = c_id
from customer (repeatableread)
where c_id = @c_id and
c_w_id = @w_id and
c_d_id = @d_id
-- insert fresh row into orders table
insert into orders values ( @o_id,
@d_id,
@w_id,
@c_id_local,
@o_entry_d,
0,
@o_ol_cnt,
@o_all_local)
-- insert corresponding row into new-order table
insert into new_order values ( @o_id,
@d_id,
@w_id)
-- select warehouse tax
select @w_tax = w_tax
from warehouse (repeatableread)
where w_id = @w_id
if (@commit_flag = 1)
commit transaction n
else
-- all that work for nuthin!!!

```

```

        rollback transaction n

-- return order data to client

    select @w_tax,
           @d_tax,
           @o_id,
           @c_last,
           @c_discount,
           @c_credit,
           @o_entry_d,
           @commit_flag

end

go

```

## ORDSTAT.SQL

```

-- File:      ORDSTAT.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20.000
--           Copyright Microsoft, 1999
-- Purpose:   Creates order status transaction stored procedure
--
--           Interface Level: 4.10.000

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_orderstatus" )
    drop procedure    tpcc_orderstatus
go

create proc tpcc_orderstatus @w_id  smallint,
                             @d_id  tinyint,

                             @c_id  int,
                             @c_last char(16) = ""

as

declare @c_balance    numeric(12,2),
        @c_first     char(16),
        @c_middle    char(2),
        @o_id        int,
        @o_entry_d   datetime,
        @o_carrier_id smallint,
        @cnt         smallint

begin tran o

if (@c_id = 0)
    begin

```

```

-- get customer id and info using last name

        select @cnt = (count(*)+1)/2
        from customer (repeatableread)
        where c_last = @c_last and
              c_w_id = @w_id and
              c_d_id = @d_id

        set rowcount @cnt

        select @c_id = c_id,
               @c_balance = c_balance,
               @c_first = c_first,
               @c_last = c_last,
               @c_middle = c_middle
        from customer (repeatableread)
        where c_last = @c_last and
              c_w_id = @w_id and
              c_d_id = @d_id

        order by c_w_id, c_d_id, c_last, c_first

        set rowcount 0

    end

    else

        begin

-- get customer info if by id

            select @c_balance = c_balance,
                   @c_first = c_first,
                   @c_middle = c_middle,
                   @c_last = c_last
            from customer (repeatableread)
            where c_id = @c_id and
                  c_d_id = @d_id and
                  c_w_id = @w_id

            select @cnt = @@rowcount

        end

-- if no such customer

        if (@cnt = 0)
            begin
                raiserror("Customer not found",18,1)
                goto custnotfound
            end

-- get order info

```



```

select @o_id          = o_id,
       @o_entry_d     = o_entry_d,
       @o_carrier_id  = o_carrier_id
from   orders (serializable)
where  o_c_id         = @c_id and
       o_d_id         = @d_id and
       o_w_id         = @w_id
order  by o_id asc

```

```
-- select order lines for the current order
```

```

select ol_supply_w_id,
       ol_i_id,
       ol_quantity,
       ol_amount,
       ol_delivery_d
from   order_line (repeatableread)
where  ol_o_id = @o_id and
       ol_d_id = @d_id and
       ol_w_id = @w_id

```

```
custnotfound:
```

```
commit tran o
```

```
-- return data to client
```

```

select @c_id,
       @c_last,
       @c_first,
       @c_middle,
       @o_entry_d,
       @o_carrier_id,
       @c_balance,
       @o_id

```

```
go
```

## PAYMENT.SQL

```

-- File:      PAYMENT.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.20.000
--            Copyright Microsoft, 1999
-- Purpose:   Creates payment transaction stored procedure
--
--            Interface Level: 4.10.000

```

```

use tpcc
go

```

```

if exists (select name from sysobjects where name = "tpcc_payment" )
drop procedure tpcc_payment

```

```
go
```

```

create proc tpcc_payment
    @w_id          smallint,
    @c_w_id       smallint,
    @h_amount     numeric(6,2),
    @d_id         tinyint,
    @c_d_id       tinyint,
    @c_id         int,
    @c_last       char(16) = ""

```

```
as
```

```

declare @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city     char(20),
        @w_state    char(2),
        @w_zip      char(9),
        @w_name     char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city     char(20),
        @d_state    char(2),
        @d_zip      char(9),
        @d_name     char(10),
        @c_first    char(16),
        @c_middle   char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city     char(20),
        @c_state    char(2),
        @c_zip      char(9),
        @c_phone    char(16),
        @c_since    datetime,
        @c_credit   char(2),
        @c_credit_lim numeric(12,2),
        @c_balance  numeric(12,2),
        @c_discount numeric(4,4),
        @data       char(500),
        @c_data     char(500),
        @datetime   datetime,
        @w_ytd      numeric(12,2),
        @d_ytd      numeric(12,2),
        @cnt        smallint,
        @val        smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local smallint,
        @c_id_local int

```

```
select @screen_data = ""
```

```
begin tran p
```

```

-- get payment date

select @datetime = getdate()

if (@c_id = 0)
begin

-- get customer id and info using last name

select @cnt = count(*)
from customer (repeatableread)
where c_last = @c_last and
c_w_id = @c_w_id and
c_d_id = @c_d_id

select @val = (@cnt + 1) / 2
set rowcount @val

select @c_id = c_id
from customer (repeatableread)
where c_last = @c_last and
c_w_id = @c_w_id and
c_d_id = @c_d_id

order by c_last, c_first

set rowcount 0

end

-- get customer info and update balances

update customer
set @c_balance = c_balance = c_balance - @h_amount,
c_payment_cnt = c_payment_cnt + 1,
c_ytd_payment = c_ytd_payment + @h_amount,
@c_first = c_first,
@c_middle = c_middle,
@c_last = c_last,
@c_street_1 = c_street_1,
@c_street_2 = c_street_2,
@c_city = c_city,
@c_state = c_state,
@c_zip = c_zip,
@c_phone = c_phone,
@c_credit = c_credit,
@c_credit_lim = c_credit_lim,
@c_discount = c_discount,
@c_since = c_since,
@data = c_data,
@c_id_local = c_id
where c_id = @c_id and
c_w_id = @c_w_id and
c_d_id = @c_d_id

```

```

-- if customer has bad credit get some more info

if (@c_credit = "BC")
begin

-- compute new info

select @c_data = convert(char(5),@c_id) +
convert(char(4),@c_d_id) +
convert(char(5),@c_w_id) +
convert(char(4),@d_id) +
convert(char(5),@w_id) +
convert(char(19),@h_amount) +
substring(@data, 1, 458)

-- update customer info

update customer
set c_data = @c_data
where c_id = @c_id and
c_w_id = @c_w_id and
c_d_id = @c_d_id

select @screen_data = substring (@c_data,1,200)

end

-- get district data and update year-to-date

update district
set d_ytd = d_ytd + @h_amount,
@d_street_1 = d_street_1,
@d_street_2 = d_street_2,
@d_city = d_city,
@d_state = d_state,
@d_zip = d_zip,
@d_name = d_name,
@d_id_local = d_id
where d_w_id = @w_id and
d_id = @d_id

-- get warehouse data and update year-to-date

update warehouse
set w_ytd = w_ytd + @h_amount,
@w_street_1 = w_street_1,
@w_street_2 = w_street_2,
@w_city = w_city,
@w_state = w_state,
@w_zip = w_zip,
@w_name = w_name,
@w_id_local = w_id
where w_id = @w_id

```

```

-- create history record

insert into history values ( @c_id_local,
                             @c_d_id,
                             @c_w_id,
                             @d_id_local,
                             @w_id_local,
                             @datetime,
                             @h_amount,
                             @w_name + " " + @d_name)

commit tran p

-- return data to client

select @c_id,
       @c_last,
       @datetime,
       @w_street_1,
       @w_street_2,
       @w_city,
       @w_state,
       @w_zip,
       @d_street_1,
       @d_street_2,
       @d_city,
       @d_state,
       @d_zip,
       @c_first,
       @c_middle,
       @c_street_1,
       @c_street_2,
       @c_city,
       @c_state,
       @c_zip,
       @c_phone,
       @c_since,
       @c_credit,
       @c_credit_lim,
       @c_discount,
       @c_balance,
       @screen_data

go

```

## STOCKLEV.SQL

```

-- File:      STOCKLEV.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.20.000
--            Copyright Microsoft, 1999
-- Purpose:   Creates stock level transaction stored procedure
--
--            Interface Level: 4.10.000

```

```

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_stocklevel" )
drop procedure tpcc_stocklevel
go

create proc tpcc_stocklevel @w_id          smallint,
                             @d_id          tinyint,
                             @threshold    smallint
as

declare @o_id_low int,
        @o_id_high int

select @o_id_low = (d_next_o_id - 20),
       @o_id_high = (d_next_o_id - 1)
from district
where d_w_id = @w_id and
      d_id = @d_id

select count(distinct(s_i_id))
from stock, order_line
where ol_w_id = @w_id and
      ol_d_id = @d_id and
      ol_o_id between @o_id_low and
               @o_id_high and
      s_w_id = ol_w_id and
      s_i_id = ol_i_id and
      s_quantity < @threshold

go

```

## VERSION.SQL

```

-- File:      VERSION.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.20.000
--            Copyright Microsoft, 1999
-- Purpose:   Returns version level of TPC-C stored procs
-- Note:     Always update the return value of this proc for
--            any interface changes or "must have" bug fixes.
--
-- The value returned by this SP defines the "interface level",
-- which must match between the stored procs and the client code.
-- The interface level may be down rev from the current kit. This
-- indicates that the interface hasn't changed since that version.

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_version" )

```

```

        drop procedure tpcc_version
go

create proc tpcc_version
as
declare @version      char(8)

begin
    select @version = "4.10.000"
    select @version as "Version"
end

go

```

## GETARGS.C

```

//      File:          GETARGS.C
//                          Microsoft TPC-C Kit Ver. 4.20
//                          Copyright Microsoft, 1996, 1997, 1998, 1999
//      Purpose:      Source file for command line processing

// Includes
#include "tpcc.h"

//=====
//
// Function name: GetArgsLoader
//
//=====

void GetArgsLoader(int argc, char **argv, TPCCCLR_ARGS *pargs)
{
    int      i;
    char     *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int)
GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server      = SERVER;
    pargs->user         = USER;
    pargs->password     = PASSWORD;
    pargs->database     = DATABASE;
    pargs->batch        = BATCH;
    pargs->num_warehouses = UNDEF;
    pargs->tables_all   = TRUE;
    pargs->table_item   = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer = FALSE;
    pargs->table_orders = FALSE;

```

```

    pargs->loader_res_file      = LOADER_RES_FILE;
    pargs->pack_size            = DEFLLDPACKSIZE;
    pargs->starting_warehouse  = DEF_STARTING_WAREHOUSE;
    pargs->build_index          = BUILD_INDEX;
    pargs->index_order          = INDEX_ORDER;
    pargs->index_script_path    = INDEX_SCRIPT_PATH;
    pargs->scale_down           = SCALE_DOWN;

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for ( i = 1; i < argc; ++i)
{
    if (argv[i][0] != '-' && argv[i][0] != '/')
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];

    switch (ptr[1])
    {
        case 'h':      /* Fall through */
        case 'H':
            GetArgsLoaderUsage();
            break;

        case 'D':
            pargs->database = ptr+2;
            break;

        case 'P':
            pargs->password = ptr+2;
            break;

        case 'S':
            pargs->server = ptr+2;
            break;

        case 'U':
            pargs->user = ptr+2;
            break;

        case 'b':
            pargs->batch = atol(ptr+2);
            break;

        case 'W':
            pargs->num_warehouses = atol(ptr+2);
            break;
    }
}

```

```

case 's':
    pargs->starting_warehouse = atol(ptr+2);
    break;

case 't':
    {
        pargs->tables_all = FALSE;
        if (strcmp(ptr+2,"item") == 0)
            pargs->table_item = TRUE;
        else if (strcmp(ptr+2,"warehouse")
== 0)
            pargs->table_warehouse =
TRUE;
        else if (strcmp(ptr+2,"customer") ==
0)
            pargs->table_customer = TRUE;
        else if (strcmp(ptr+2,"orders") ==
0)
            pargs->table_orders = TRUE;
        else
        {
            printf("\nUnrecognized command");
            GetArgsLoaderUsage();
            exit(1);
        }
        break;
    }

case 'f':
    pargs->loader_res_file = ptr+2;
    break;

case 'p':
    pargs->pack_size = atol(ptr+2);
    break;

case 'i':
    pargs->build_index = atol(ptr+2);
    break;

case 'o':
    pargs->index_order = atol(ptr+2);
    break;

case 'c':
    pargs->scale_down = atol(ptr+2);
    break;

case 'd':
    pargs->index_script_path = ptr+2;
    break;

```

```

default:
    GetArgsLoaderUsage();
    exit(-1);
    break;
}

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
    printf("Number of Warehouses is required\n");
    exit(-2);
}

return;
}

//=====
//
// Function name: GetArgsLoaderUsage
//
//=====

void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int)
GetCurrentThreadId());
#endif

    printf("TPCCLDR:\n\n");
    printf("Parameter
Default\n");
    printf("-----\n");
    printf("-W Number of Warehouses to Load           Required
\n");
    printf("-S Server                               %s\n",
SERVER);
    printf("-U Username                               %s\n",
USER);
    printf("-P Password                             %s\n",
PASSWORD);
    printf("-D Database                               %s\n",
DATABASE);
    printf("-b Batch Size
%ld\n", (long) BATCH);
    printf("-p TDS packet size
%ld\n", (long) DEFLDPACKSIZE);

```

```

    printf("-f Loader Results Output Filename
%s\n", LOADER_RES_FILE);
    printf("-s Starting Warehouse
%d\n", (long) DEF_STARTING_WAREHOUSE);
    printf("-i Build Option (data = 0, data and index = 1)
%d\n", (long) BUILD_INDEX);
    printf("-o Cluster Index Build Order (before = 1, after = 0)
%d\n", (long) INDEX_ORDER);
    printf("-c Build Scaled Database (normal = 0, tiny = 1)
%d\n", (long) SCALE_DOWN);
    printf("-d Index Script Path
%s\n", INDEX_SCRIPT_PATH);
    printf("-t Table to Load                all
tables \n");
    printf("    [item|warehouse|customer|orders]\n");
    printf("    Notes: \n");
    printf("    - the '-t' parameter may be included multiple times to
\n");
    printf("    specify multiple tables to be loaded \n");
    printf("    - 'item' loads ITEM table \n");
    printf("    - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables
\n");
    printf("    - 'customer' loads CUSTOMER and HISTORY tables \n");
    printf("    - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables
\n");

    printf("\nNote: Command line switches are case sensitive.\n");

    exit(0);
}

```

## RANDOM.C

```

//      File:          RANDOM.C
//      Microsoft TPC-C Kit Ver. 4.20
//      Copyright Microsoft, 1996, 1997, 1998, 1999
//      Purpose:      Random number generation routines for database
loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A          16807
#define M          2147483647
#define Q          127773      /* M div A */
#define R          2836        /* M mod A */
#define Thread     __declspec(thread)

```

```

// Globals
long   Thread Seed = 0;      /* thread local seed */

/*****
*
* random -
*
* Implements a GOOD pseudo random number generator. This generator
*
* will/should? run the complete period before repeating.
*
* Copied from:
*
* Random Numbers Generators: Good Ones Are Hard to Find.
*
* Communications of the ACM - October 1988 Volume 31 Number 10
*
* Machine Dependencies:
*
* long must be 2 ^ 31 - 1 or greater.
*
*
*****/

/*****
* seed - load the Seed value used in irand and drand. Should be used
before *
* first call to irand or drand.
*
*****/

void seed(long val)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n",Seed, val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

```

```

}

/*****
*
* irand - returns a 32 bit integer pseudo random number with a period of
*       1 to 2 ^ 32 - 1.
*
* parameters:
*       none.
*
* returns:
*       32 bit integer - defined as long ( see above ).
*
* side effects:
*       seed get recomputed.
*****/

long irand()
{
    register long    s;      /* copy of seed */
    register long    test;   /* test flag */
    register long    hi;     /* tmp value for speed */
    register long    lo;     /* tmp value for speed */

#ifdef DEBUG
    printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;
}

```

```

    return( Seed );
}

/*****
*
* drand - returns a double pseudo random number between 0.0 and 1.0.
*       See irand.
*****/

double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0 );
}

//=====
// Function   : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int)
GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-
96 perf enhancement */

#ifdef DEBUG

```

```

        printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
                (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

        return rand_num;
}

#if 0
//Original code pgd 08/13/96

long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int)
GetCurrentThreadId());
#endif

        upper++;

        if ((upper <= lower))
            rand_num = upper;
        else
            rand_num = lower + irand() % ((upper > lower) ? upper -
lower : upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
                (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

        return rand_num;
}
#endif

//=====
// Function   : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)

```

```

{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int)
GetCurrentThreadId());
#endif

        rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-
x+1))+x;

#ifdef DEBUG
    printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(),
rand_num);
#endif

        return rand_num;
}

```

## STRINGS.C

```

//      File:          STRINGS.C
//
//      Microsoft TPC-C Kit Ver. 4.20
//      Copyright Microsoft, 1996, 1997, 1998, 1999
//      Purpose:       Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
//
// Function name: MakeAddress
//
//=====

void MakeAddress(char *street_1,
                char *street_2,
                char *city,
                char *state,
                char *zip)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAddress()\n", (int)
GetCurrentThreadId());
#endif

        MakeAlphaString (10, 20, ADDRESS_LEN, street_1);

```



```

    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString ( 2,  2, STATE_LEN, state);
    MakeZipNumberString( 9,  9, ZIP_LEN, zip);

#ifdef DEBUG
    printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s,
state: %s, zip: %s\n",
        (int) GetCurrentThreadId(), street_1, street_2,
city, state, zip);
#endif

    return;
}

//=====
//
// Function name: LastName
//
//=====
void LastName(int num,
             char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT", "ABLE" , "PRI" , "PRES",
        "ESE" , "ANTI" , "CALLY", "ATION", "EING"
    };

#ifdef DEBUG
    printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
        exit(-1);
    }
}

```

```

    }

#ifdef DEBUG
    printf("[%ld]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
        (int) GetCurrentThreadId(), num, num/100,
(num/10)%10, num%10);
    printf("[%ld]DBG: LastName: String = %s\n", (int)
GetCurrentThreadId(), name);
#endif

    return;
}

//=====
//
// Function name: MakeAlphaString
//
//=====
//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random
alphanumeric
//(respectively, numeric) characters of a random length of minimum x,
maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only
other
//requirement is that the character set used "must be able to represent a
minimum
//of 128 different characters". We are using 8-bit chars, so this is a
non issue.
//It is completely unreasonable to stuff non-printing chars into the text
fields.
//-CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int)
GetCurrentThreadId());
#endif
}

```

```

len= RandomNumber(x, y);

for (i=0; i<len; i++)
{
    cc = chArray[RandomNumber(0, chArrayMax)];
    str[i] = cc;
}

if ( len < z )
    memset(str+len, ' ', z - len);
str[len] = 0;

return len;
}

//=====
//
// Function name: MakeOriginalAlphaString
//
//=====

int MakeOriginalAlphaString(int  x,
                           int  y,
                           int  z,
                           char *str,
                           int percent)

{
    int    len;
    int    val;
    int    start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    // verify prercentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOrigianlAlphaString: Invalid percentage: %d\n",
percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if ((x + y) <= 8)
    {
        printf("MakeOriginalAlphaString: string length must be >=
8\n");
        exit(-1);
    }
}

```

```

// Make Alpha String
len = MakeAlphaString(x,y, z, str);

val = RandomNumber(1,100);
if (val <= percent)
{
    start = RandomNumber(0, len - 8);
    strncpy(str + start, "ORIGINAL", 8);
}

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
(int) GetCurrentThreadId(), str);
#endif

return strlen(str);
}

//=====
//
// Function name: MakeNumberString
//
//=====

int MakeNumberString(int  x, int  y, int  z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16,
16, string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

return 16;
}

//=====
//
// Function name: MakeZipNumberString
//
//=====

int MakeZipNumberString(int  x, int  y, int  z, char *str)
{
    char tmp[16];
}

```

```

//MakeZipNumberString is always called MakeZipNumberString(9, 9,
9, string)

    strcpy(str, "000011111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

```

```

//=====
//
// Function name: InitString
//
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int)
GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

```

```

//=====
// Function name: InitAddress
//
// Description:
//
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state,
char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

```

```

}

//=====
//
// Function name: PaddString
//
//=====
void PaddString(int max, char *name)
{
    int        len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

## TIME.C

```

//      File:           TIME.C
//
//                        Microsoft TPC-C Kit Ver. 4.20
//                        Copyright Microsoft, 1996, 1997, 1998, 1999
//      Purpose:        Source file for time functions

```

```

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
//
// Function name: TimeNow
//
//=====
long TimeNow()
{
    long        time_now;
    struct      _timeb el_time;

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);
}

```

```

time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;
return time_now;
}

```

## TPCC.H

```

// File:          TPCC.H
//               Microsoft TPC-C Kit Ver. 4.20
//               Copyright Microsoft, 1996, 1997, 1998, 1999
// Purpose:       Header file for TPC-C database loader

```

```

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.20"

```

```

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>

```

```

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

```

```

// General constants
#define MILLI          1000
#define FALSE         0
#define TRUE          1
#define UNDEF         -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

```

```

// Default environment constants
#define SERVER         ""
#define DATABASE      "tpcc"
#define USER           "sa"
#define PASSWORD      ""

```

```

// Default loader arguments
#define BATCH          10000
#define DEFLDPACKSIZE 32768

```

```

#define LOADER_RES_FILE      "logs\\load.out"
#define LOADER_NURAND_C     123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX        1 // build both
data and indexes
#define INDEX_ORDER        1 // build
indexes before load
#define SCALE_DOWN         0 // build a normal
scale database
#define INDEX_SCRIPT_PATH   "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all; // set
    if loading all tables
    BOOL table_item; // set
    if loading ITEM table specifically
    BOOL table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL table_customer; // set
    if loading CUSTOMER and HISTORY
    BOOL table_orders; // set if
loading NEW-ORDER, ORDERS, ORDER-LINE
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    char *loader_res_file;
    char *synch_servername;
    long case_sensitivity;
    long starting_warehouse;
    long build_index;
    long index_order;
    long scale_down;
    char *index_script_path;
} TPCC_LDR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20

```

```

#define STATE_LEN          2
#define ZIP_LEN            9
#define S_DIST_LEN        24
#define S_DATA_LEN        50
#define D_NAME_LEN        10
#define FIRST_NAME_LEN    16
#define MIDDLE_NAME_LEN   2
#define PHONE_LEN          16
#define CREDIT_LEN         2
#define C_DATA_LEN         500
#define H_DATA_LEN         24
#define DIST_INFO_LEN     24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN        25
#define OL_DIST_INFO_LEN  24
#define C_SINCE_LEN        23
#define H_DATE_LEN         23
#define OL_DELIVERY_D_LEN  23
#define O_ENTRY_D_LEN     23

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

TPCCLDR.C

// File:          TPCCLDR.C
//               Microsoft TPC-C Kit Ver. 4.20
//               Copyright Microsoft, 1996, 1997, 1998, 1999

```

```

// Purpose:      Source file for TPC-C database loader

// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS          100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4

// Functions declarations

void HandleErrorDBC (SQLHDBC hdbc1);

void CheckSQL();
void CheckDataBase();

long NURand();
void LoadItem();
void LoadWarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures

```

```

typedef struct
{
    long            ol;
    long            ol_i_id;
    short           ol_supply_w_id;
    short           ol_quantity;
    double          ol_amount;
    char            ol_dist_info[DIST_INFO_LEN+1];
    char            ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long            o_id;
    short           o_d_id;
    short           o_w_id;
    long            o_c_id;
    short           o_carrier_id;
    short           o_ol_cnt;
    short           o_all_local;
    ORDER_LINE_STRUCT o_ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long            c_id;
    short           c_d_id;
    short           c_w_id;
    char            c_first[FIRST_NAME_LEN+1];
    char            c_middle[MIDDLE_NAME_LEN+1];
    char            c_last[LAST_NAME_LEN+1];
    char            c_street_1[ADDRESS_LEN+1];
    char            c_street_2[ADDRESS_LEN+1];
    char            c_city[ADDRESS_LEN+1];
    char            c_state[STATE_LEN+1];
    char            c_zip[ZIP_LEN+1];
    char            c_phone[PHONE_LEN+1];
    char            c_credit[CREDIT_LEN+1];
    double          c_credit_lim;
    double          c_discount;
    // fix to avoid ODBC float to numeric conversion problem.
    // double        c_balance;
    char            c_balance[6];

    double          c_ytd_payment;
    short           c_payment_cnt;
    short           c_delivery_cnt;
    char            c_data[C_DATA_LEN+1];
    double          h_amount;
    char            h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct

```

```

{
    char            c_last[LAST_NAME_LEN+1];
    char            c_first[FIRST_NAME_LEN+1];
    long            c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long            time_start;
} LOADER_TIME_STRUCT;

// Global variables

char            szLastError[300];

HENV            henv;

HDBC            v_hdbc; // for SQL Server
version verification
HDBC            i_hdbc1; // for ITEM table
HDBC            w_hdbc1; // for WAREHOUSE,
DISTRICT, STOCK
HDBC            c_hdbc1; // for CUSTOMER
HDBC            c_hdbc2; // for HISTORY
HDBC            o_hdbc1; // for ORDERS
HDBC            o_hdbc2; // for NEW-ORDER

HDBC            o_hdbc3; // for ORDER-LINE

HSTMT           v_hstmt; // for SQL Server
version verification
HSTMT           i_hstmt1;
HSTMT           w_hstmt1;
HSTMT           c_hstmt1, c_hstmt2;
HSTMT           o_hstmt1, o_hstmt2, o_hstmt3;

ORDERS_STRUCT  orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long            orders_rows_loaded;
long            new_order_rows_loaded;
long            order_line_rows_loaded;
long            history_rows_loaded;
long            customer_rows_loaded;
long            stock_rows_loaded;
long            district_rows_loaded;
long            item_rows_loaded;
long            warehouse_rows_loaded;
long            main_time_start;
long            main_time_end;
long            max_items;
long            customers_per_district;
long            orders_per_district;

```

```

long                first_new_order;
long                last_new_order;

TPCCLDR_ARGS      *aptr, args;

//=====
//
// Function name: main
//
//=====

int main(int  argc, char **argv)
{
    DWORD          dwThreadID[MAX_MAIN_THREADS];
    HANDLE         hThread[MAX_MAIN_THREADS];
    FILE           *fLoader;
    char           buffer[255];
    int            i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");
    printf("\n*");
    printf("\n* Microsoft SQL Server");
    printf("\n*");
    printf("\n* TPC-C BENCHMARK KIT: Database loader");
    printf("\n*");
    printf("\n* Version %s");
    TPCKIT_VER);
    printf("\n*");
    printf("\n*****\n\n");

    // process command line arguments

    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    // verify correct SQL Server version in use
    // you must be using SQL Server 7.00.623 or better to load

    CheckSQL();

    // verify database and tables exist before attempting to load

    CheckDataBase();

    printf("Build interface is ODBC.\n");

    if (aptr->build_index == 0)

```

```

        printf("Data load only - no index creation.\n");
    else
        printf("Data load and index creation.\n");

    if (aptr->index_order == 0)
        printf("Clustered indexes will be created after bulk
load.\n");
    else
        printf("Clustered indexes will be created before bulk
load.\n");

    // set database scale values
    if (aptr->scale_down == 1)
    {
        printf("*** Scaled Down Database ***\n");
        max_items = MAXITEMS_SCALE_DOWN;
        customers_per_district = CUSTOMERS_SCALE_DOWN;
        orders_per_district = ORDERS_SCALE_DOWN;
        first_new_order = 0;
        last_new_order = 30;
    }
    else
    {
        max_items = MAXITEMS;
        customers_per_district = CUSTOMERS_PER_DISTRICT;
        orders_per_district = ORDERS_PER_DISTRICT;
        first_new_order = 2100;
        last_new_order = 3000;
    }

    // open connections to SQL Server

    OpenConnections();

    // open file for loader results
    fLoader = fopen(aptr->loader_res_file, "w");

    if (fLoader == NULL)
    {
        printf("Error, loader result file open failed.");
        exit(-1);
    }

    // start loading data

    sprintf(buffer, "TPC-C load started for %ld warehouses.\n", aptr-
>num_warehouses);

    printf("%s", buffer);
    fprintf(fLoader, "%s", buffer);

    main_time_start = (TimeNow() / MILLI);

```

```

// start parallel load threads

if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting loader threads for: item\n");
    hThread[0] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadItem,
                                NULL,
                                0,
&dwThreadID[0]);
    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating thread =
0.\n");
        exit(-1);
    }
    if (aptr->tables_all || aptr->table_warehouse)
    {
        fprintf(fLoader, "Starting loader threads for:
warehouse\n");
        hThread[1] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadWarehouse,
                                NULL,
                                0,
&dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread =
1.\n");
            exit(-1);
        }
    }
    if (aptr->tables_all || aptr->table_customer)
    {
        fprintf(fLoader, "Starting loader threads for:
customer\n");
        hThread[2] = CreateThread(NULL,

```

```

                                0,
(LPTHREAD_START_ROUTINE) LoadCustomer,
                                NULL,
                                0,
&dwThreadID[2]);
        if (hThread[2] == NULL)
        {
            printf("Error, failed in creating creating main
thread = 2.\n");
            exit(-1);
        }
    }
    if (aptr->tables_all || aptr->table_orders)
    {
        fprintf(fLoader, "Starting loader threads for: orders\n");
        hThread[3] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadOrders,
                                NULL,
                                0,
&dwThreadID[3]);
        if (hThread[3] == NULL)
        {
            printf("Error, failed in creating creating main
thread = 3.\n");
            exit(-1);
        }
    }
    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject( hThread[i], INFINITE );
            CloseHandle(hThread[i]);
            hThread[i] = NULL;
        }
    }
    main_time_end = (TimeNow() / MILLI);
    sprintf(buffer, "\nTPC-C load completed successfully in %ld
minutes.\n",
            (main_time_end - main_time_start)/60);

```



```

printf("%s",buffer);
fprintf(fLoader, "%s", buffer);

fclose(fLoader);

SQLFreeEnv (henv);

exit(0);

return 0;
}

//=====
//
// Function name: LoadItem
//
//=====

void LoadItem()
{
    long          i_id;
    long          i_im_id;
    char          i_name[I_NAME_LEN+1];
    double        i_price;
    char          i_data[I_DATA_LEN+1];
    char          name[20];
    long          time_start;
    RETCODE       rc;
    DBINT         rcint;
    char          bcphint[128];

    // Seed with unique number
    seed(1);

    printf("Loading item table...\n");

    // if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitmcl");

    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);

    sprintf(name, "%s..%s", aptr->database, "item");

    rc = bcp_init(i_hdbc1, name, NULL, "logs\\item.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {

```

```

        sprintf(bcphint, "tablock, order (i_id), ROWS_PER_BATCH =
100000");
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(i_hdbc1);
    }

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0,
3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 4);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, I_DATA_LEN, NULL, 0, 0,
5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    time_start = (TimeNow() / MILLI);

    item_rows_loaded = 0;

    for (i_id = 1; i_id <= max_items; i_id++)
    {
        i_im_id = RandomNumber(1L, 10000L);

        MakeAlphaString(14, 24, I_NAME_LEN, i_name);

        i_price = ((float) RandomNumber(100L, 10000L))/100.0;

        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEEDED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
    }
}

```

```

    }

    rcint = bcp_done(i_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmcl");
}

//=====
//
// Function   : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are
// created
//
//=====
void LoadWarehouse()
{
    short    w_id;
    char     w_name[W_NAME_LEN+1];
    char     w_street_1[ADDRESS_LEN+1];
    char     w_street_2[ADDRESS_LEN+1];
    char     w_city[ADDRESS_LEN+1];
    char     w_state[STATE_LEN+1];
    char     w_zip[ZIP_LEN+1];
    double   w_tax;
    double   w_ytd;
    char     name[20];
    long     time_start;
    RETCODE  rc;
    DBINT    rcint;
    char     bcphint[128];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\n");

```

```

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxwarcl");

InitString(w_name, W_NAME_LEN+1);
InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

sprintf(name, "%s..%s", aptr->database, "warehouse");

rc = bcp_init(w_hdbc1, name, NULL, "logs\\whouse.err", DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (w_id), ROWS_PER_BATCH =
%d", aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 1);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0,
2);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL,
0, 0, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL,
0, 0, 4);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0,
0, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0,
6);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, 7);

```

```

    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    time_start = (TimeNow() / MILLI);

    warehouse_rows_loaded = 0;

    for (w_id = (short)aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
    {
        MakeAlphaString(6,10, W_NAME_LEN, w_name);

        MakeAddress(w_street_1, w_street_2, w_city, w_state,
w_zip);

        w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        w_ytd = 300000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        warehouse_rows_loaded++;
        CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded,
"warehouse", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading warehouse table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxwarcl");

    stock_rows_loaded = 0;
    district_rows_loaded = 0;

    District();
    Stock();

```

```

}

//=====
//
// Function   : District
//
//=====

void District()
{
    short    d_id;
    short    d_w_id;
    char     d_name[D_NAME_LEN+1];
    char     d_street_1[ADDRESS_LEN+1];
    char     d_street_2[ADDRESS_LEN+1];
    char     d_city[ADDRESS_LEN+1];
    char     d_state[STATE_LEN+1];
    char     d_zip[ZIP_LEN+1];
    double   d_tax;
    double   d_ytd;
    char     name[20];
    long     d_next_o_id;
    long     time_start;
    int      w_id;
    RETCODE rc;
    DBINT    rcint;
    char     bcphint[128];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
    sprintf(name, "%s..%s", aptr->database, "district");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\district.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (d_w_id, d_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 10));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)

```

```

        HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL,
0, 0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL,
0, 0, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0,
0, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0,
7);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

```

```

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 11);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    d_ytd = 30000.0;

    d_next_o_id = orders_per_district+1;

    time_start = (TimeNow() / MILLI);

    for (w_id = aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
    {
        d_w_id = w_id;

        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {
            MakeAlphaString(6,10,D_NAME_LEN, d_name);

            MakeAddress(d_street_1, d_street_2, d_city,
d_state, d_zip);

            d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

            rc = bcp_sendrow(w_hdbc1);
            if (rc != SUCCEED)
                HandleErrorDBC(w_hdbc1);

            district_rows_loaded++;
            CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
        }
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading district table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxdiscl");

    return;
}

//=====
//
// Function   : Stock
//

```

```
//=====
void Stock()
{
    long      s_i_id;
    short     s_w_id;
    short     s_quantity;
    char      s_dist_01[S_DIST_LEN+1];
    char      s_dist_02[S_DIST_LEN+1];
    char      s_dist_03[S_DIST_LEN+1];
    char      s_dist_04[S_DIST_LEN+1];
    char      s_dist_05[S_DIST_LEN+1];
    char      s_dist_06[S_DIST_LEN+1];
    char      s_dist_07[S_DIST_LEN+1];
    char      s_dist_08[S_DIST_LEN+1];
    char      s_dist_09[S_DIST_LEN+1];
    char      s_dist_10[S_DIST_LEN+1];
    long      s_ytd;
    short     s_order_cnt;
    short     s_remote_cnt;
    char      s_data[S_DATA_LEN+1];
    short     len;
    char      name[20];
    long      time_start;
    RETCODE rc;
    DBINT rcint;
    char      bcphint[128];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxstkcl");

    sprintf(name, "%s..%s", aptr->database, "stock");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\stock.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
    if (rc != SUCCEED)

```

```
        HandleErrorDBC(w_hdbc1);

    bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0,
0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0,
0, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0,
0, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0,
0, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0,
0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0,
0, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0,
0, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0,
0, 11);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0,
0, 12);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0,
0, 13);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 14);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 15);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 16);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, S_DATA_LEN, NULL, 0, 0,
17);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;

time_start = (TimeNow() / MILLI);

printf("...Loading stock table\n");

for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (short)aptr->starting_warehouse; s_w_id <=
aptr->num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);

```

```

len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);
len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

rc = bcp_sendrow(w_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

stock_rows_loaded++;
CheckForCommit(w_hdbc1, w_hstmt1,
stock_rows_loaded, "stock", &time_start);

    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading stock table.\n");

SQLFreeStmt(w_hstmt1, SQL_DROP);
SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");

return;
}

//=====
//
// Function : LoadCustomer
//
//=====

void LoadCustomer()
{
    LOADER_TIME_STRUCT customer_time_start;
    LOADER_TIME_STRUCT history_time_start;
    short w_id;
    short d_id;
    DWORD dwThreadId[MAX_CUSTOMER_THREADS];
    HANDLE hThread[MAX_CUSTOMER_THREADS];
    char name[20];
    RETCODE rc;
    DBINT rcint;
    char bcp[128];
    char cmd[256];

```

```

// SQLRETURN          rc_1;
// SQLSMALLINT       recnum, MsgLen;
// SQLCHAR           SqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
// SQLINTEGER        NativeError;

// Seed with unique number
seed(5);

printf("Loading customer and history tables...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxcuscl");

// Initialize bulk copy
sprintf(name, "%s..%s", aptr->database, "customer");

rc = bcp_init(c_hdbc1, name, NULL, "logs\\customer.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
}

sprintf(name, "%s..%s", aptr->database, "history");

rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

sprintf(bcphint, "tablock");
rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

customer_rows_loaded    = 0;
history_rows_loaded     = 0;

CustomerBufInit();

customer_time_start.time_start = (TimeNow() / MILLI);
history_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (short)aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
{

```

```

for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
{
    CustomerBufLoad(d_id, w_id);

    // Start parallel loading threads here...

    // Start customer table thread
    printf("...Loading customer table for: d_id = %d,
w_id = %d\n", d_id, w_id);
    hThread[0] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
                                0,
&dwThreadID[0]);

    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating
thread = 0.\n");
        exit(-1);
    }

    // Start History table thread
    printf("...Loading history table for: d_id = %d,
w_id = %d\n", d_id, w_id);
    hThread[1] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
                                0,
&dwThreadID[1]);

    if (hThread[1] == NULL)
    {
        printf("Error, failed in creating creating
thread = 1.\n");
        exit(-1);
    }

    WaitForSingleObject( hThread[0], INFINITE );
    WaitForSingleObject( hThread[1], INFINITE );
}

```

```

        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
        }

    }

}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxcuscl");

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID =
1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "isql -S%s -U%s -P%s -d%s -e -Q\"update customer set
c_first = 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" >
logs\\nurand_load.log",
        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database,
        LOADER_NURAND_C);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);

```

```

SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
//
// Function   : CustomerBufInit
//
//=====

void CustomerBufInit()
{
    int    i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount = (float) 0;

        // fix to avoid ODBC float to numeric conversion problem.
        // customer_buf[i].c_balance = 0;
        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment = 0;
        customer_buf[i].c_payment_cnt = 0;
        customer_buf[i].c_delivery_cnt = 0;

        strcpy(customer_buf[i].c_data,"");

        customer_buf[i].h_amount = 0;
    }
}

```



```

        strcpy(customer_buf[i].h_data, "");
    }
}

//=====
//
// Function   : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====

void CustomerBufLoad(int d_id, int w_id)
{
    long                i;
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

        MakeAlphaString(8,16,FIRST_NAME_LEN, c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
        d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;

        customer_buf[i].c_ytd_payment = 10.0;

        customer_buf[i].c_payment_cnt = 1;
        customer_buf[i].c_delivery_cnt = 0;

        // Generate CUSTOMER and HISTORY data

```

```

        customer_buf[i].c_id = c[i].c_id;

        strcpy(customer_buf[i].c_first, c[i].c_first);
        strcpy(customer_buf[i].c_last, c[i].c_last);

        customer_buf[i].c_middle[0] = 'O';
        customer_buf[i].c_middle[1] = 'E';

        MakeAddress(customer_buf[i].c_street_1,
                    customer_buf[i].c_street_2,
                    customer_buf[i].c_city,
                    customer_buf[i].c_state,
                    customer_buf[i].c_zip);

        MakeNumberString(16, 16, PHONE_LEN,
customer_buf[i].c_phone);

        if (RandomNumber(1L, 100L) > 10)
            customer_buf[i].c_credit[0] = 'G';
        else
            customer_buf[i].c_credit[0] = 'B';
            customer_buf[i].c_credit[1] = 'C';

        customer_buf[i].c_credit_lim = 50000.0;
        customer_buf[i].c_discount = ((float) RandomNumber(0L,
5000L)) / 10000.0;

        // fix to avoid ODBC float to numeric conversion problem.

        // customer_buf[i].c_balance = -10.0;
        strcpy(customer_buf[i].c_balance, "-10.0");

        MakeAlphaString(300, 500, C_DATA_LEN,
customer_buf[i].c_data);

        // Generate HISTORY data
        MakeAlphaString(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
    }
}

//=====
//
// Function   : LoadCustomerTable
//
//=====

void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    int                i;
    long               c_id;
    short              c_d_id;

```

```

short      c_w_id;
char       c_first[FIRST_NAME_LEN+1];
char       c_middle[MIDDLE_NAME_LEN+1];
char       c_last[LAST_NAME_LEN+1];
char       c_street_1[ADDRESS_LEN+1];
char       c_street_2[ADDRESS_LEN+1];
char       c_city[ADDRESS_LEN+1];
char       c_state[STATE_LEN+1];
char       c_zip[ZIP_LEN+1];
char       c_phone[PHONE_LEN+1];
char       c_credit[CREDIT_LEN+1];
double     c_credit_lim;
double     c_discount;

// fix to avoid ODBC float to numeric conversion problem.

// double      c_balance;
char       c_balance[6];

double     c_ytd_payment;
short      c_payment_cnt;
short      c_delivery_cnt;
char       c_data[C_DATA_LEN+1];
char       c_since[C_SINCE_LEN+1];
RETCODE    rc;

rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 3);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0,
0, 4);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0,
0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0,
6);

```

```

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0,
0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
8);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0,
9);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0,
10);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, 11);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0,
12);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, 13);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0,
14);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 15);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 16);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

```

```

// fix to avoid ODBC float to numeric conversion problem.

// rc = bcp_bind(c_hdbc1, (BYTE *) &c_balance, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 17);
// if (rc != SUCCEEDED)
//     HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0,
SQLCHARACTER, 17);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 18);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 19);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 20);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500, NULL, 0, 0, 21);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;

    strcpy(c_first, customer_buf[i].c_first);
    strcpy(c_middle, customer_buf[i].c_middle);
    strcpy(c_last, customer_buf[i].c_last);
    strcpy(c_street_1, customer_buf[i].c_street_1);
    strcpy(c_street_2, customer_buf[i].c_street_2);
    strcpy(c_city, customer_buf[i].c_city);
    strcpy(c_state, customer_buf[i].c_state);
    strcpy(c_zip, customer_buf[i].c_zip);
    strcpy(c_phone, customer_buf[i].c_phone);
    strcpy(c_credit, customer_buf[i].c_credit);

    FormatDate(&c_since);

    c_credit_lim = customer_buf[i].c_credit_lim;
    c_discount = customer_buf[i].c_discount;

```

```

// fix to avoid ODBC float to numeric conversion problem.

// c_balance = customer_buf[i].c_balance;
strcpy(c_balance, customer_buf[i].c_balance);

c_ytd_payment = customer_buf[i].c_ytd_payment;
c_payment_cnt = customer_buf[i].c_payment_cnt;
c_delivery_cnt = customer_buf[i].c_delivery_cnt;

strcpy(c_data, customer_buf[i].c_data);

// Send data to server
rc = bcp_sendrow(c_hdbc1);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

customer_rows_loaded++;
CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
}
}

//=====
//
// Function : LoadHistoryTable
//
//=====

void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    int i;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);

```

```

    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);

        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
    }
}

//=====
//

```

```

// Function   : LoadOrders
//
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT    orders_time_start;
    LOADER_TIME_STRUCT    new_order_time_start;
    LOADER_TIME_STRUCT    order_line_time_start;
    short                  w_id;
    short                  d_id;
    DWORD                  dwThreadId[MAX_ORDER_THREADS];
    HANDLE                 hThread[MAX_ORDER_THREADS];
    char                   name[20];
    RETCODE                rc;
    char                   bcphint[128];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordc1");
        BuildIndex("idxnodc1");
        BuildIndex("idxodlc1");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "new_order");

    rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
}

```

```

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (no_w_id, no_d_id,
no_o_id), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
        rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);
    }

    sprintf(name, "%s..%s", aptr->database, "order_line");

    rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id,
ol_o_id, ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses *
300000));
        rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
    }

    orders_rows_loaded      = 0;
    new_order_rows_loaded   = 0;
    order_line_rows_loaded  = 0;

    OrdersBufInit();

    orders_time_start.time_start = (TimeNow() / MILLI);
    new_order_time_start.time_start = (TimeNow() / MILLI);
    order_line_time_start.time_start = (TimeNow() / MILLI);

    for (w_id = (short)aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
    {
        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {
            OrdersBufLoad(d_id, w_id);

            // start parallel loading threads here...

            // start Orders table thread

            printf("...Loading Order Table for: d_id = %d, w_id
= %d\n", d_id, w_id);

            hThread[0] = CreateThread(NULL,
0,

```

```

(LPTHREAD_START_ROUTINE) LoadOrdersTable,
&orders_time_start,
0,
&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // start NewOrder table thread

        printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadNewOrderTable,
&new_order_time_start,
0,
&dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        // start Order-Line table thread

        printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadID[2]);

        if (hThread[2] == NULL)

```

```

        {
            printf("Error, failed in creating creating
thread = 2.\n");
            exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );
        WaitForSingleObject( hThread[2], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[2]) == FALSE)
        {
            printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
        }
    }

    printf("Finished loading orders.\n");

    return;
}

```

```

//=====
//
// Function   : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====

void OrdersBufInit()
{
    int    i;
    int    j;

    for (i=0;i<orders_per_district;i++)
    {

```

```

orders_buf[i].o_id = 0;
orders_buf[i].o_d_id = 0;
orders_buf[i].o_w_id = 0;
orders_buf[i].o_c_id = 0;
orders_buf[i].o_carrier_id = 0;
orders_buf[i].o_ol_cnt = 0;
orders_buf[i].o_all_local = 0;

for (j=0;j<=14;j++)
{
    orders_buf[i].o_ol[j].ol = 0;
    orders_buf[i].o_ol[j].ol_i_id = 0;
    orders_buf[i].o_ol[j].ol_supply_w_id = 0;
    orders_buf[i].o_ol[j].ol_quantity = 0;
    orders_buf[i].o_ol[j].ol_amount = 0;
    strcpy(orders_buf[i].o_ol[j].ol_dist_info,"");
}
}

```

```

//=====
//
// Function   : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====

```

```

void OrdersBufLoad(int d_id, int w_id)
{
    int    cust[ORDERS_PER_DISTRICT+1];
    long   o_id;
    short  ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
        d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data

        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
        orders_buf[o_id].o_c_id = cust[o_id+1];
        orders_buf[o_id].o_ol_cnt = (short)RandomNumber(5L, 15L);
    }
}

```

```

        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);
            orders_buf[o_id].o_all_local = 1;
        }
        else
        {
            orders_buf[o_id].o_carrier_id = 0;
            orders_buf[o_id].o_all_local = 1;
        }

        for (ol=0; ol<orders_buf[o_id].o_ol_cnt; ol++)
        {
            orders_buf[o_id].o_ol[ol].ol = ol+1;
            orders_buf[o_id].o_ol[ol].ol_i_id =
RandomNumber(1L, max_items);
            orders_buf[o_id].o_ol[ol].ol_supply_w_id = w_id;
            orders_buf[o_id].o_ol[ol].ol_quantity = 5;
            MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o_ol[ol].ol_dist_info);

            // Generate ORDER-LINE data
            if (o_id < first_new_order)
            {
                orders_buf[o_id].o_ol[ol].ol_amount = 0;
                // Added to insure ol_delivery_d set
properly during load

                FormatDate(&orders_buf[o_id].o_ol[ol].ol_delivery_d);

            }
            else
            {
                orders_buf[o_id].o_ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
                // Added to insure ol_delivery_d set
properly during load

                // odbc datetime format

                strcpy(orders_buf[o_id].o_ol[ol].ol_delivery_d,"1899-12-31
00:00:00.000");
            }
        }
    }
}

```

```

//=====
//
// Function   : LoadOrdersTable
//
//=====

void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int         i;
    long        o_id;
    short       o_d_id;
    short       o_w_id;
    long        o_c_id;
    short       o_carrier_id;
    short       o_ol_cnt;
    short       o_all_local;
    char        o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE     rc;
    DBINT       rcint;

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN,
NULL, 0, SQLCHARACTER, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 7);
}

```

```

    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;
        o_c_id    = orders_buf[i].o_c_id;
        o_carrier_id = orders_buf[i].o_carrier_id;
        o_ol_cnt  = orders_buf[i].o_ol_cnt;
        o_all_local = orders_buf[i].o_all_local;

        FormatDate(&o_entry_d);

        // send data to server
        rc = bcp_sendrow(o_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        orders_rows_loaded++;
        CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded,
"orders", &orders_time_start->time_start);
    }

    // rcint = bcp_batch(o_hdbc1);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc1);

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc1);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc1);

        SQLFreeStmt(o_hstmt1, SQL_DROP);
        SQLDisconnect(o_hdbc1);
        SQLFreeConnect(o_hdbc1);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxordc1");

        // build non-clustered index
        if (aptr->build_index == 1)
            BuildIndex("idxordnc");
    }
}

```

```

}

//=====
//
// Function   : LoadNewOrderTable
//
//=====

void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    int      i;
    long     o_id;
    short    o_d_id;
    short    o_w_id;
    RETCODE  rc;
    DBINT    rcint;

    // Bind NEW-ORDER data

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;
        CheckForCommit(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
    }

    // rcint = bcp_batch(o_hdbc2);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc2);
}

```



```

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc2);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc2);

    SQLFreeStmt(o_hstmt2, SQL_DROP);
    SQLDisconnect(o_hdbc2);
    SQLFreeConnect(o_hdbc2);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxnodc1");
}
}

//=====
//
// Function   : LoadOrderLineTable
//
//=====

void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    int          i,j;
    long         o_id;
    short        o_d_id;
    short        o_w_id;
    long         ol;
    long         ol_i_id;
    short        ol_supply_w_id;
    short        ol_quantity;
    double       ol_amount;
    char         ol_dist_info[DIST_INFO_LEN+1];
    char         ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE      rc;
    DBINT       rcint;

    // bind ORDER-LINE data
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

```

```

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0,
OL_DELIVERY_D_LEN, NULL, 0, SQLCHARACTER, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL,
0, 0, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        for (j=0; j < orders_buf[i].o_ol_cnt; j++)
        {
            ol          = orders_buf[i].o_ol[j].ol;
            ol_i_id    = orders_buf[i].o_ol[j].ol_i_id;
            ol_supply_w_id =
orders_buf[i].o_ol[j].ol_supply_w_id;
            ol_quantity = orders_buf[i].o_ol[j].ol_quantity;

```

```

        ol_amount      = orders_buf[i].o_ol[j].ol_amount;

strcpy(ol_delivery_d,orders_buf[i].o_ol[j].ol_delivery_d);

strcpy(ol_dist_info,orders_buf[i].o_ol[j].ol_dist_info);

        rc = bcp_sendrow(o_hdbc3);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        order_line_rows_loaded++;
        CheckForCommit(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
    }

}

// rcint = bcp_batch(o_hdbc3);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc3);

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc3);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc3);

    SQLFreeStmt(o_hstmt3, SQL_DROP);
    SQLDisconnect(o_hdbc3);
    SQLFreeConnect(o_hdbc3);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxodlcl");

}

}

//=====
//
// Function   : GetPermutation
//
//=====

void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)

```

```

        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
//
// Function   : CheckForCommit
//
//=====

void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    int rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long    time_end, time_diff;
           // DBINT    rcint;

    if ( !(rows_loaded % aptr->batch) )
    {

        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d
(%d rows)\n",
                aptr->batch,
                table_name,
                time_diff,
                rows_loaded,
                (float) aptr->batch / (time_diff ? time_diff
: 1L));

        *time_start = time_end;
    }

    return;
}

```

```

//=====
//
// Function   : OpenConnections
//
//=====

void OpenConnections()
{
    RETCODE      rc;

    char         szDriverString[300];
    char         szDriverStringOut[1024];
    SQLSMALLINT  cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0
);

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connections to SQL Server

    // Connection 1

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,

```

```

aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = SQLDriverConnect ( i_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0]
,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    // Connection 2

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = SQLDriverConnect ( w_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT
);

    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    // Connection 3

```

```

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
    aptr->server,
    aptr->user,
    aptr->password,
    aptr->database );

    rc = SQLSetConnectOption ( c_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = SQLDriverConnect ( c_hdbc1,
                            NULL,
                            (SQLCHAR*)&szDriverString[0] ,
                            SQL_NTS,
                            (SQLCHAR*)&szDriverStringOut[0],
                            sizeof(szDriverStringOut),
                            &cbDriverStringOut,
                            SQL_DRIVER_NOPROMPT
);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    // Connection 4

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
    aptr->server,
    aptr->user,
    aptr->password,
    aptr->database );

    rc = SQLSetConnectOption ( c_hdbc2, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = SQLDriverConnect ( c_hdbc2,
                            NULL,
                            (SQLCHAR*)&szDriverString[0] ,
                            SQL_NTS,
                            (SQLCHAR*)&szDriverStringOut[0],
                            sizeof(szDriverStringOut),
                            &cbDriverStringOut,
                            SQL_DRIVER_NOPROMPT
);

```

```

    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    // Connection 5

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
    aptr->server,
    aptr->user,
    aptr->password,
    aptr->database );

    rc = SQLSetConnectOption ( o_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = SQLDriverConnect ( o_hdbc1,
                            NULL,
                            (SQLCHAR*)&szDriverString[0] ,
                            SQL_NTS,
                            (SQLCHAR*)&szDriverStringOut[0],
                            sizeof(szDriverStringOut),
                            &cbDriverStringOut,
                            SQL_DRIVER_NOPROMPT
);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    // Connection 6

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
    aptr->server,
    aptr->user,
    aptr->password,
    aptr->database );

    rc = SQLSetConnectOption ( o_hdbc2, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = SQLDriverConnect ( o_hdbc2,
                            NULL,
                            (SQLCHAR*)&szDriverString[0] ,
                            SQL_NTS,
                            (SQLCHAR*)&szDriverStringOut[0],

```

```

        sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT
);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    // Connection 7

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

    rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = SQLDriverConnect ( o_hdbc3,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0],
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT
);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

//=====
//
// Function name: BuildIndex
//
//=====

void BuildIndex(char *index_script)
{
    char cmd[256];

    printf("Starting index creation: %s\n",index_script);

    sprintf(cmd, "isql -S%s -U%s -P%s -e -i%s\\%s.sql > logs\\%s.log",
        aptr->server,

```

```

        aptr->user,
        aptr->password,
        aptr->index_script_path,
        index_script,
        index_script);

    system(cmd);

    printf("Finished index creation: %s\n",index_script);
}

void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR      SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER   NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN    rc2;
    char         timebuf[128];
    char         datebuf[128];
    FILE         *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
&NativeError,
                                Msg, sizeof(Msg) , &MsgLen )) !=
SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf, timebuf,
szLastError);
            fclose(fp1);
        }
        i++;
    }
}

void HandleErrorSTMT (HSTMT hstmt1)

```

```

{
    SQLCHAR      SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER   NativeError;
    SQLSMALLINT  i, MsgLen;
    SQLRETURN    rc2;
    char         timebuf[128];
    char         datebuf[128];
    FILE         *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState
, &NativeError,
                                Msg, sizeof(Msg) , &MsgLen )) !=
SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf, timebuf,
szLastError);
            fclose(fp1);
        }

        i++;
    }
}

void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000" , &when );
}

```

```

return;
}

//=====
//
// Function   : CheckSQL
//
//=====

void CheckSQL()
{
    RETCODE      rc;

    char         szDriverString[300];
    char         szDriverStringOut[1024];
    int          SQLBuildFlag;

    SQLSMALLINT  cbDriverStringOut;
    SQLCHAR      SQLVersion[19];
    SQLINTEGER   SQLVersionInd;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0
);

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &v_hdbc);

    SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connection to SQL Server

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password );

    if ( SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE,
(SQLPOINTER)aptr->pack_size, SQL_IS_UIINTEGER ) != SQL_SUCCESS )
        HandleErrorDBC(v_hdbc);

    rc = SQLDriverConnect ( v_hdbc,
                                NULL,
                                (SQLCHAR*)&szDriverString[0]
,

```

```

        SQL_NTS,
        (SQLCHAR*)&szDriverStringOut[0],
        sizeof(szDriverStringOut),
        &cbDriverStringOut,
        SQL_DRIVER_NOPROMPT );

    if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
        HandleErrorDBC(v_hdbc);

    if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt) !=
SQL_SUCCESS )
        HandleErrorSTMT(v_hstmt);

    rc = SQLBindCol(v_hstmt, 4, SQL_C_CHAR, &SQLVersion,
sizeof(SQLVersion), &SQLVersionInd);

    // issue SQL Server extended stored procedure (xp_msver) to
determine installed version
    rc = SQLExecDirect(v_hstmt, "EXECUTE xp_msver ProductVersion",
SQL_NTS);

    if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
        HandleErrorSTMT(v_hstmt);

    rc = SQLFetch(v_hstmt);

    if (rc != SQL_SUCCESS)
        HandleErrorDBC(v_hdbc);

    // Check build number to ensure 7.00.623 or higher
    SQLBuildFlag = 1;

    if ( SQLVersion[0] == 55 )
    {
        if ( SQLVersion[2] == 48 )
        {
            if ( SQLVersion[5] == 56 )
            {
                if ( (SQLVersion[6] >= 48) & (SQLVersion[7]
>= 53) )
                {
                    SQLBuildFlag = 0;
                    printf("You are using SQL Server
version = %9s\n\n", SQLVersion);
                }
                else
                {
                    SQLBuildFlag = 1;
                }
            }
            else
            {
                SQLBuildFlag = 1;
            }
        }
        else
    }

```

```

        {
            if ( SQLVersion[5] >= 54 )
            {
                if ( (SQLVersion[6] >= 50) &
(SQLVersion[7] >= 51) )
                {
                    SQLBuildFlag = 0;
                    printf("You are using SQL
Server version = %9s\n\n", SQLVersion);
                }
                else
                {
                    SQLBuildFlag = 1;
                }
            }
            else
            {
                if ( SQLVersion[5] >= 55 )
                {
                    if ( (SQLVersion[6] >= 48) &
(SQLVersion[7] >= 48) )
                    {
                        SQLBuildFlag = 0;
                        printf("You are using
SQL Server version = %9s\n\n", SQLVersion);
                    }
                    else
                    {
                        SQLBuildFlag = 1;
                    }
                }
            }
        }
    }
    else
    {
        if ( SQLVersion[5] >= 49 )
        {
            if ( (SQLVersion[6] >= 52) & (SQLVersion[7]
>= 48) )
            {
                SQLBuildFlag = 0;
                printf("You are using SQL Server
version = %9s\n\n", SQLVersion);
            }
            else
            {
                SQLBuildFlag = 1;
            }
        }
        else
        {

```

```

                SQLBuildFlag = 1;
            }
        }
    }
else
{
    SQLBuildFlag = 1;
}

if ( SQLBuildFlag == 1 )
{
    printf("ERROR. The SQL Server version you are using is not
supported\n");
    printf("for TPC-C benchmarking. You currently have SQL
Server version %9s\n",SQLVersion);
    printf("installed. Please upgrade to Microsoft SQL Server
7.00.623 or better.\n");
    printf("and re-run the SETUP program.\n\n");
    exit(1);
}

SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

return;
}

//=====
//
// Function : CheckDataBase
//
//=====

void CheckDataBase()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    char TablesBitMap[9] = {"000000000"};
    int i, ExitFlag;

    SQLSMALLINT cbDriverStringOut;
    SQLCHAR TabName[10];
    SQLINTEGER TabNameInd, TabCount, TabCountInd;

    ExitFlag = 0;

```

```

SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );

SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0
);

SQLAllocHandle(SQL_HANDLE_DBC, henv , &v_hdbc);

SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

// Open connection to SQL Server

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE,
(SQLPOINTER)aptr->pack_size, SQL_IS_UIINTEGER );
if (rc != SQL_SUCCESS)
    HandleErrorDBC(v_hdbc);

rc = SQLDriverConnect ( v_hdbc,
NULL,
(SQLCHAR*)&szDriverString[0]
,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

// if the rc is SQL_ERROR, the the TPCC database probably does not
exist
if (rc == SQL_ERROR)
{
    printf("The database TPCC does not appear to exist!\n");
    printf("\nCheck LOGS\ directory for database creation
errors.\n");

    // cleanup database connections and handles
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    // since there is not a database, exit back to SETUP.CMD
    exit(1);
}

```



```

        if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt) !=
SQL_SUCCESS )
            HandleErrorDBC(v_hdbc);

        if ( SQLBindCol(v_hstmt, 1, SQL_C_ULONG, &TabCount, 0,
&TabCountInd) != SQL_SUCCESS )
            HandleErrorSTMT(v_hstmt);

        // count the number of user tables from sysobjects
        rc = SQLExecDirect(v_hstmt, "select count(*) from sysobjects where
xtype = \'U\'", SQL_NTS);
        if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
            HandleErrorSTMT(v_hstmt);

        if ( SQLFetch(v_hstmt) != SQL_SUCCESS )
            HandleErrorSTMT(v_hstmt);

        // if the number of tables is less than 9, select all the user
tables in TPCC
        if (TabCount != 9)
        {
            SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);

            SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt);

            if ( SQLBindCol(v_hstmt, 1, SQL_C_CHAR, &TabName,
sizeof(TabName), &TabNameInd) != SQL_SUCCESS )
                HandleErrorSTMT(v_hstmt);

            // select the list of user tables into a result set
            rc = SQLExecDirect(v_hstmt, "select * from sysobjects where
xtype = \'U\'", SQL_NTS);
            if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
                HandleErrorSTMT(v_hstmt);

            // go through the result set and set the bitmap for each
found table
            // set the bitmap to '1' if the table name is found

            while ((rc = SQLFetch(v_hstmt)) != SQL_NO_DATA)
            {
                switch( TabName[0] )
                {
                    case 'w':
                        TablesBitMap[0] = '1';
                        break;
                    case 'd':
                        TablesBitMap[1] = '1';
                        break;
                    case 'c':
                        TablesBitMap[2] = '1';
                        break;
                    case 'h':

```

```

                        TablesBitMap[3] = '1';
                        break;
                    case 'n':
                        TablesBitMap[4] = '1';
                        break;
                    case 'o':
                        if (TabName[5] = 's')
                            TablesBitMap[5] = '1';
                        if (TabName[5] = '_')
                            TablesBitMap[6] = '1';
                        break;
                    case 'i':
                        TablesBitMap[7] = '1';
                        break;
                    case 's':
                        TablesBitMap[8] = '1';
                        break;
                }
            }

            // a '0' ExitFlag means do NOT exit the loader early, a '1'
means exit the loader early
            ExitFlag = 0;

            // interate through the bitmap to display which table(s) is
actually missing
            for (i = 0; i <= 8; i++)
            {
                switch(i)
                {
                    case 0:
                        if (TablesBitMap[i] == '0')
                        {
                            printf("The Warehouse table is
missing or damaged.\n");
                            ExitFlag = 1;
                        }
                        break;
                    case 1:
                        if (TablesBitMap[i] == '0')
                        {
                            printf("The District table is
missing or damaged.\n");
                            ExitFlag = 1;
                        }
                        break;
                    case 2:
                        if (TablesBitMap[i] == '0')
                        {
                            printf("The Customer table is
missing or damaged.\n");
                            ExitFlag = 1;
                        }
                }
            }

```

```

        break;
    case 3:
        if (TablesBitMap[i] == '0')
        {
            printf("The History table is missing
or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 4:
        if (TablesBitMap[i] == '0')
        {
            printf("The New_Order table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 5:
        if (TablesBitMap[i] == '0')
        {
            printf("The Orders table is missing
or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 6:
        if (TablesBitMap[i] == '0')
        {
            printf("The Order_Line table is
missing or damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 7:
        if (TablesBitMap[i] == '0')
        {
            printf("The Item table is missing or
damaged.\n");
            ExitFlag = 1;
        }
        break;
    case 8:
        if (TablesBitMap[i] == '0')
        {
            printf("The Stock table is missing
or damaged.\n");
            ExitFlag = 1;
        }
        break;
    }
}

```

```

        // if one or more tables are missing, display message and
exit the loader
        if (ExitFlag = 1)
        {
            printf("\nExiting TPC-C Loader!\n");
            printf("\nCheck LOGS\ directory for database\n");
            printf("or table creation errors.\n");

            // cleanup database connections and handles
            SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
            SQLDisconnect(v_hdbc);
            SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

            exit(1);
        }

        // cleanup database connections and handles
        SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
        SQLDisconnect(v_hdbc);
        SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

        return;
    }
}

```

# Appendix C - Tunable Parameters and Options

**This section discloses hardware information and the Windows NT 4.0 Enterprise Edition registry parameters used on the Primergy K800 server system.**

Microsoft Diagnostics Report For \\SPIDER

## OS Version Report

Microsoft (R) Windows NT (TM) Server  
Version 4.0 (Build 1381: Service Pack 5) x86 Multiprocessor Free  
Registered Owner: TPC-C PerfLab, Siemens  
Product Number: 36397-OEM-0029424-01381

## System Report

System: AT/AT COMPATIBLE  
Hardware Abstraction Layer: MPS 1.4 - APIC platform  
BIOS Date: 09/30/99  
BIOS Version: OCPRF100- PhoenixBIOS 4.0 Releas

## Processor list:

0: x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz  
1: x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz  
2: x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz  
3: x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz  
4: x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz  
5: x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz  
6: x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz  
7: x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz

## Video Display Report

BIOS Date: 05/29/98  
BIOS Version: CL-GD5446 PCI VGA BIOS Version 1.35

## Adapter:

Setting: 800 x 600 x 256

85 Hz

Type: cirrus compatible display adapter  
String: Cirrus Logic Compatible  
Memory: 2 MB  
Chip Type: Cirrus Logic 5446  
DAC Type: Integrated RAMDAC

## Driver:

Vendor: Microsoft Corporation  
File(s): cirrus.sys, vga.dll, cirrus.dll, vga256.dll, vga64K.dll  
Version: 4.00, 4.0.0

## Drives Report

C:\ (Local - NTFS) Total: 1,048,559 KB, Free: 438,982 KB  
Serial Number: 300C - B251  
Bytes per cluster: 512  
Sectors per cluster: 1  
Filename length: 255  
D:\ (Local - NTFS) Total: 7,842,796 KB, Free: 2,602,956 KB  
Serial Number: 897 - D70D  
Bytes per cluster: 512  
Sectors per cluster: 8  
Filename length: 255  
X:\ (Local - NTFS) Total: 204,799,980 KB, Free: 43,710,340 KB  
Serial Number: 88BB - DC4A  
Bytes per cluster: 512  
Sectors per cluster: 8  
Filename length: 255  
Y:\ (Local - NTFS) Total: 204,799,980 KB, Free: 110,052,924 KB  
Serial Number: 6C6F - 10  
Bytes per cluster: 512  
Sectors per cluster: 8  
Filename length: 255

## Memory Report

Handles: 3,241  
Threads: 96  
Processes: 14

## Physical Memory (K)

Total: 3,931,524  
Available: 685,932  
File Cache: 13,264

Kernel Memory (K)  
 Total: 12,632  
 Paged: 8,988  
 Nonpaged: 3,644

Commit Charge (K)  
 Total: 3,094,920  
 Limit: 8,147,192  
 Peak: 3,095,508

Pagefile Space (K)  
 Total: 4,369,408  
 Total in use: 3,744  
 Peak: 3,812

C:\pagefile.sys  
 Total: 273,408  
 Total in use: 1,912  
 Peak: 1,940

D:\pagefile.sys  
 Total: 4,096,000  
 Total in use: 1,832  
 Peak: 1,872

Services Report

```

-----
Alerter                               Stopped (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
Computer Browser                       Stopped (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
    LanmanServer
    LmHosts
ClipBook Server                        Stopped (Manual)
  C:\WINNT\system32\clipsrv.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
    NetDDE
DHCP Client (TDI)                     Stopped (Disabled)
  
```

```

  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    Tcpip
    Afd
    NetBT
EventLog (Event log)                  Running (Automatic)
  C:\WINNT\system32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Server                                 Stopped (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Group Dependencies:
    TDI
Workstation (NetworkProvider)         Running (Automatic)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Group Dependencies:
    TDI
License Logging Service                Stopped (Manual)
  C:\WINNT\System32\llssrv.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
TCP/IP NetBIOS Helper                  Stopped (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Group Dependencies:
    NetworkProvider
Messenger                              Running (Automatic)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
    NetBios
MSDTC (MS Transactions)                Stopped (Disabled)
  C:\WINNT\System32\msdtc.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
  
```

```

RPCSS
NTLMSSP
MSSQLServer          Stopped (Manual)
  C:\MSSQL7\bin\sqlservr.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Network DDE (NetDDEGroup) Stopped (Manual)
  C:\WINNT\system32\netdde.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    NetDDEDSDM
Network DDE DSDM      Stopped (Manual)
  C:\WINNT\system32\netdde.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Net Logon (RemoteValidation) Stopped (Manual)
  C:\WINNT\System32\lsass.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
    LmHosts
NT LM Security Support Provider Stopped (Disabled)
  C:\WINNT\System32\SERVICES.EXE
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Plug and Play (PlugPlay) Stopped (Manual)
  C:\WINNT\system32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Protected Storage     Stopped (Manual)
  c:\winnt\system32\pstores.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process, Interactive
  Service Dependencies:
    RpcSs
Directory Replicator  Stopped (Manual)
  C:\WINNT\System32\lmrepl.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
    LanmanWorkstation
    LanmanServer
Remote Procedure Call (RPC) Locator Stopped (Manual)

```

```

C:\WINNT\System32\LOCATOR.EXE
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Own Process
Service Dependencies:
  LanmanWorkstation
  Rdr
Remote Procedure Call (RPC) Service Running (Automatic)
  C:\WINNT\system32\RpcSs.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Schedule              Stopped (Manual)
  C:\WINNT\System32\AtSvc.Exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Spooler (SpoolerGroup) Stopped (Disabled)
  C:\WINNT\system32\spoolss.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process, Interactive
SQLServerAgent        Stopped (Manual)
  C:\MSSQL7\bin\sqlagent.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
    MSSQLServer
Telephony Service     Stopped (Manual)
  C:\WINNT\system32\tapisrv.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
UPS                   Stopped (Manual)
  C:\WINNT\System32\ups.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process

```

Drivers Report

```

-----
Abiosdsk (Primary disk) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
AFD Networking Support Environment (TDI) Running (Automatic)
  C:\WINNT\System32\drivers\afd.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Aha154x (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal

```

```

Service Flags: Kernel Driver, Shared Process
Aha174x (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
aic78xx (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Always (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
ami0nt (SCSI miniport) Stopped (Disabled)
C:\WINNT\System32\DRIVERS\ami0nt.sys
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
amsint (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Arrow (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
atapi (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Atdisk (Primary disk) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
ati (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Beep (Base) Running (System)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
BusLogic (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Busmouse (Pointer Port) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Cdaudio (Filter) Stopped (System)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Cdfs (File system) Running (Disabled)
Error Severity: Normal
Service Flags: File System Driver, Shared Process
Group Dependencies:
  SCSI CDROM Class
Cdrom (SCSI CDROM Class) Running (System)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Group Dependencies:
  SCSI miniport
Changer (Filter) Stopped (System)
Error Severity: Ignore

```

```

Service Flags: Kernel Driver, Shared Process
cirrus (Video) Running (System)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Cpqarray (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
cpqfw2e (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
dac960nt (SCSI miniport) Stopped (Disabled)
C:\WINNT\System32\drivers\dac960nt.sys
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
dce376nt (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Delldsa (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Dell_DGX (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Disk (SCSI Class) Running (Boot)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Group Dependencies:
  SCSI miniport
Diskperf (Filter) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
DptScsi (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
dte329x (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Intel(R) PRO NDIS Driver (NDIS) Running (Automatic)
C:\WINNT\System32\drivers\E100BNT.SYS
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
et4000 (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Fastfat (Boot file system) Running (Disabled)
Error Severity: Normal
Service Flags: File System Driver, Shared Process
Fd16_700 (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Fd7000ex (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process

```

```

Fd8xx (SCSI miniport)                Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
flashpnt (SCSI miniport)             Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Floppy (Primary disk)                Running (System)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Ftdisk (Filter)                      Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
i8042 Keyboard and PS/2 Mouse Port Driver (Keyboard Port) Running
(System)
  System32\DRIVERS\i8042prt.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Inport (Pointer Port)                Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
intlfxsr (Base)                     Running (Boot)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Jazzg300 (Video)                    Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Jazzg364 (Video)                    Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Jzvxl484 (Video)                    Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Keyboard Class Driver (Keyboard Class) Running (System)
  System32\DRIVERS\kbdclass.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
KSecDD (Base)                       Running (System)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
macdisk (Filter)                    Stopped (Disabled)
  C:\WINNT\System32\drivers\macdisk.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
mga (Video)                          Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
mga_mil (Video)                     Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
mitsumi (SCSI miniport)             Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
mkecr5xx (SCSI miniport)            Stopped (Disabled)

```

```

  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Modem (Extended base)                Stopped (Manual)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Mouse Class Driver (Pointer Class)   Running (System)
  System32\DRIVERS\mouclass.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
mraid (Primary disk)                 Running (Boot)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
MRAID35X (SCSI Miniport)             Stopped (Disabled)
  System32\DRIVERS\mraid35x.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Msfs (File system)                   Running (System)
  Error Severity: Normal
  Service Flags: File System Driver, Shared Process
Mup (Network)                        Running (Manual)
  C:\WINNT\System32\drivers\mup.sys
  Error Severity: Normal
  Service Flags: File System Driver, Shared Process
Ncr53c9x (SCSI miniport)             Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
ncr77c22 (Video)                     Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Ncrc700 (SCSI miniport)              Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Ncrc710 (SCSI miniport)              Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Microsoft NDIS System Driver (NDIS)  Running (System)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
NetBIOS Interface (NetBIOSGroup)     Running (Manual)
  C:\WINNT\System32\drivers\netbios.sys
  Error Severity: Normal
  Service Flags: File System Driver, Shared Process
  Group Dependencies:
    TDI
WINS Client (TCP/IP) (PNP_TDI)       Running (Automatic)
  C:\WINNT\System32\drivers\netbt.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
  Service Dependencies:
    Tcpip
NetDetect                             Stopped (Manual)
  C:\WINNT\system32\drivers\netdect.sys
  Error Severity: Normal

```

Service Flags: Kernel Driver, Shared Process  
 Npfs (File system) Running (System)  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Ntfs (File system) Running (Disabled)  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Null (Base) Running (System)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Oliscsi (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Parallel (Extended base) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
 Parport  
 Group Dependencies:  
 Parallel arbitrator  
 Parport (Parallel arbitrator) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 ParVdm (Extended base) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
 Parport  
 Group Dependencies:  
 Parallel arbitrator  
 PCIDump (PCI Configuration) Stopped (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Pcmcia (System Bus Extender) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 PnP ISA Enabler Driver (Base) Stopped (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 psdisp (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Ql10wnt (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 qv (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Rdr (Network) Running (Manual)  
 C:\WINNT\System32\drivers\rdr.sys  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 s3 (Video) Stopped (Disabled)

Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Scsiprnt (Extended base) Stopped (Automatic)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
 SCSI miniport  
 Scsiscan (SCSI Class) Running (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
 SCSI miniport  
 Serial (Extended base) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Sermouse (Pointer Port) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Sfloppy (Primary disk) Stopped (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
 SCSI miniport  
 Simbad (Filter) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 slcd32 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Sparrow (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Spock (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Srv (Network) Stopped (Manual)  
 C:\WINNT\System32\drivers\srv.sys  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 symc810 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 sym\_hi (SCSI miniport) Running (Boot)  
 C:\WINNT\system32\drivers\sym\_hi.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Sysdrv (Extended Base) Stopped (Manual)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 T128 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 T13B (SCSI miniport) Stopped (Disabled)



```

Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
TCP/IP Service (PNP_TDI) Running (Automatic)
C:\WINNT\System32\drivers\tcpip.sys
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
tga (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
tmv1 (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Ultra124 (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Ultra14f (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Ultra24f (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
update (Base) Stopped (System)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
v7vram (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
VgaSave (Video Save) Stopped (System)
C:\WINNT\System32\drivers\vga.sys
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
VgaStart (Video Init) Stopped (System)
C:\WINNT\System32\drivers\vga.sys
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Wd33c93 (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
wd90c24a (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
wdvga (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
weitek9 (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Xga (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process

```

#### IRQ and Port Report

Devices	Vector	Level	Affinity
MPS 1.4 - APIC platform	8	8	0x000000ff
MPS 1.4 - APIC platform	0	0	0x000000ff
MPS 1.4 - APIC platform	1	1	0x000000ff
MPS 1.4 - APIC platform	2	2	0x000000ff
MPS 1.4 - APIC platform	3	3	0x000000ff
MPS 1.4 - APIC platform	4	4	0x000000ff
MPS 1.4 - APIC platform	5	5	0x000000ff
MPS 1.4 - APIC platform	6	6	0x000000ff
MPS 1.4 - APIC platform	7	7	0x000000ff
MPS 1.4 - APIC platform	8	8	0x000000ff
MPS 1.4 - APIC platform	9	9	0x000000ff
MPS 1.4 - APIC platform	10	10	0x000000ff
MPS 1.4 - APIC platform	11	11	0x000000ff
MPS 1.4 - APIC platform	12	12	0x000000ff
MPS 1.4 - APIC platform	13	13	0x000000ff
MPS 1.4 - APIC platform	14	14	0x000000ff
MPS 1.4 - APIC platform	15	15	0x000000ff
MPS 1.4 - APIC platform	16	16	0x000000ff
MPS 1.4 - APIC platform	17	17	0x000000ff
MPS 1.4 - APIC platform	18	18	0x000000ff
MPS 1.4 - APIC platform	19	19	0x000000ff
MPS 1.4 - APIC platform	20	20	0x000000ff
MPS 1.4 - APIC platform	21	21	0x000000ff
MPS 1.4 - APIC platform	22	22	0x000000ff
MPS 1.4 - APIC platform	23	23	0x000000ff
MPS 1.4 - APIC platform	24	24	0x000000ff
MPS 1.4 - APIC platform	25	25	0x000000ff
MPS 1.4 - APIC platform	26	26	0x000000ff
MPS 1.4 - APIC platform	27	27	0x000000ff
MPS 1.4 - APIC platform	28	28	0x000000ff
MPS 1.4 - APIC platform	29	29	0x000000ff
MPS 1.4 - APIC platform	30	30	0x000000ff
MPS 1.4 - APIC platform	31	31	0x000000ff
MPS 1.4 - APIC platform	32	32	0x000000ff
MPS 1.4 - APIC platform	33	33	0x000000ff
MPS 1.4 - APIC platform	34	34	0x000000ff
MPS 1.4 - APIC platform	35	35	0x000000ff
MPS 1.4 - APIC platform	36	36	0x000000ff
MPS 1.4 - APIC platform	37	37	0x000000ff
MPS 1.4 - APIC platform	38	38	0x000000ff
MPS 1.4 - APIC platform	39	39	0x000000ff
MPS 1.4 - APIC platform	40	40	0x000000ff
MPS 1.4 - APIC platform	41	41	0x000000ff
MPS 1.4 - APIC platform	42	42	0x000000ff
MPS 1.4 - APIC platform	43	43	0x000000ff
MPS 1.4 - APIC platform	44	44	0x000000ff
MPS 1.4 - APIC platform	45	45	0x000000ff
MPS 1.4 - APIC platform	46	46	0x000000ff
MPS 1.4 - APIC platform	47	47	0x000000ff

MPS 1.4 - APIC platform	61	61	0x000000ff
MPS 1.4 - APIC platform	65	65	0x000000ff
MPS 1.4 - APIC platform	80	80	0x000000ff
MPS 1.4 - APIC platform	193	193	0x000000ff
MPS 1.4 - APIC platform	225	225	0x000000ff
MPS 1.4 - APIC platform	253	253	0x000000ff
MPS 1.4 - APIC platform	254	254	0x000000ff
MPS 1.4 - APIC platform	255	255	0x000000ff
i8042prt	1	1	0xffffffff
i8042prt	12	12	0xffffffff
E100B	16	16	0x00000000
Floppy	6	6	0x00000000
sym_hi	40	40	0x00000000
sym_hi	41	41	0x00000000

Devices	Physical Address	Length
MPS 1.4 - APIC platform	0x00000000	0x0000000010
MPS 1.4 - APIC platform	0x00000020	0x0000000002
MPS 1.4 - APIC platform	0x00000040	0x0000000004
MPS 1.4 - APIC platform	0x00000048	0x0000000004
MPS 1.4 - APIC platform	0x00000061	0x0000000001
MPS 1.4 - APIC platform	0x00000070	0x0000000002
MPS 1.4 - APIC platform	0x00000080	0x0000000010
MPS 1.4 - APIC platform	0x00000092	0x0000000001
MPS 1.4 - APIC platform	0x000000a0	0x0000000002
MPS 1.4 - APIC platform	0x000000c0	0x0000000010
MPS 1.4 - APIC platform	0x000000f0	0x0000000010
i8042prt	0x00000060	0x0000000001
i8042prt	0x00000064	0x0000000001
E100B	0x00002000	0x000000001e
Floppy	0x000003f0	0x0000000006
Floppy	0x000003f7	0x0000000001
sym_hi	0x00001000	0x0000000100
sym_hi	0x00001400	0x0000000100
cirrus	0x000003b0	0x000000000c
cirrus	0x000003c0	0x0000000020

DMA and Memory Report

Devices	Channel	Port
Floppy	2	0

Devices	Physical Address	Length
MPS 1.4 - APIC platform	0xfec00000	0x00000400
MPS 1.4 - APIC platform	0xfe000000	0x00000400
E100B	0xfa400000	0x0000001e
sym_hi	0xf6005400	0x00000400
sym_hi	0xf6000000	0x00002000

sym_hi	0xf6005800	0x00000400
sym_hi	0xf6002000	0x00002000
cirrus	0x000a0000	0x00020000
cirrus	0xf8000000	0x02000000

Environment Report

System Environment Variables

ComSpec=C:\WINNT\system32\cmd.exe  
NUMBER\_OF\_PROCESSORS=8  
OS=Windows\_NT  
Os2LibPath=C:\WINNT\system32\os2\dll;  
Path=C:\WINNT\system32;C:\WINNT;C:\MSSQL7\BINN  
PROCESSOR\_ARCHITECTURE=x86  
PROCESSOR\_IDENTIFIER=x86 Family 6 Model 7 Stepping 3, GenuineIntel  
PROCESSOR\_LEVEL=6  
PROCESSOR\_REVISION=0703  
windir=C:\WINNT

Environment Variables for Current User

TEMP=C:\TEMP  
TMP=C:\TEMP

Network Report

Your Access Level: Admin & Local  
Workgroup or Domain: CWIEN  
Network Version: 4.0  
LanRoot: CWIEN  
Logged On Users: 1  
Current User (1): Administrator  
Logon Domain: SPIDER  
Logon Server: SPIDER  
Transport: NetBT\_E100B1, 00-90-27-25-C1-39, VC's: 0, Wan: Wan

Character Wait: 3,600  
Collection Time: 250  
Maximum Collection Count: 16  
Keep Connection: 600  
Maximum Commands: 5  
Session Time Out: 45  
Character Buffer Size: 512  
Maximum Threads: 17

Lock Quota: 6,144  
Lock Increment: 10  
Maximum Locks: 500  
Pipe Increment: 10  
Maximum Pipes: 500  
Cache Time Out: 40  
Dormant File Limit: 45  
Read Ahead Throughput: 4,294,967,295  
Mailslot Buffers: 3  
Server Announce Buffers: 20  
Illegal Datagrams: 5  
Datagram Reset Frequency: 60  
Log Election Packets: False  
Use Opportunistic Locking: True  
Use Unlock Behind: True  
Use Close Behind: True  
Buffer Pipes: True  
Use Lock, Read, Unlock: True  
Use NT Caching: True  
Use Raw Read: True  
Use Raw Write: True  
Use Write Raw Data: True  
Use Encryption: True  
Buffer Deny Write Files: True  
Buffer Read Only Files: True  
Force Core Creation: True  
512 Byte Max Transfer: False  
Bytes Received: 1,111  
SMB's Received: 12  
Paged Read Bytes Requested: 0  
Non Paged Read Bytes Requested: 0  
Cache Read Bytes Requested: 0  
Network Read Bytes Requested: 0  
Bytes Transmitted: 1,374  
SMB's Transmitted: 12  
Paged Read Bytes Requested: 0  
Non Paged Read Bytes Requested: 0  
Cache Read Bytes Requested: 0  
Network Read Bytes Requested: 0  
Initially Failed Operations: 0  
Failed Completion Operations: 0  
Read Operations: 0  
Random Read Operations: 0  
Read SMB's: 0  
Large Read SMB's: 0  
Small Read SMB's: 0  
Write Operations: 0  
Random Write Operations: 0  
Write SMB's: 0  
Large Write SMB's: 0  
Small Write SMB's: 0  
Raw Reads Denied: 0  
Raw Writes Denied: 0

Network Errors: 0  
Sessions: 1  
Failed Sessions: 0  
Reconnects: 0  
Core Connects: 0  
LM 2.0 Connects: 0  
LM 2.x Connects: 0  
Windows NT Connects: 1  
Server Disconnects: 0  
Hung Sessions: 0  
Use Count: 1  
Failed Use Count: 1  
Current Commands: 0  
Server File Opens: 917,394,403  
Server Device Opens: 0  
Server Jobs Queued: 589,824  
Server Session Opens: 2  
Server Sessions Timed Out: 2,147,483,736  
Server Sessions Errored Out: 3  
Server Password Errors: 2,147,483,776  
Server Permission Errors: 4  
Server System Errors: 2,147,483,856  
Server Bytes Sent: 9,223,373,033,287,188,485  
Server Bytes Received: 9,223,373,892,280,647,686  
Server Average Response Time: 9  
Server Request Buffers Needed: 2,147,484,640  
Server Big Buffers Needed: 11

Adapter No: 0

Number of Logical Drives : 1

Logical Drive = 0  
Span Depth = 6  
Raid Level = 0,  
Read Ahead = NORMAL  
Stripe Size = 64KB,  
Status = OPTIMAL  
Write Policy = WRITE\_THRU,  
Direct IO = DIRECT\_IO,  
Number of Stripes = 8  
SPAN Number = 0  
Starting Block = 0  
Number of blocks = 17823744  
Device Number = 0  
Channel Number = 0  
Target Number = 0  
Device Number = 1  
Channel Number = 0  
Target Number = 1  
Device Number = 2  
Channel Number = 0

```

    Target Number = 2
Device Number = 3
    Channel Number = 0
    Target Number = 3
Device Number = 4
    Channel Number = 0
    Target Number = 4
Device Number = 5
    Channel Number = 0
    Target Number = 5
Device Number = 6
    Channel Number = 0
    Target Number = 10
Device Number = 7
    Channel Number = 0
    Target Number = 11
SPAN Number = 1
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 0
    Target Number = 12
Device Number = 1
    Channel Number = 0
    Target Number = 13
Device Number = 2
    Channel Number = 0
    Target Number = 14
Device Number = 3
    Channel Number = 0
    Target Number = 15
Device Number = 4
    Channel Number = 1
    Target Number = 0
Device Number = 5
    Channel Number = 1
    Target Number = 1
Device Number = 6
    Channel Number = 1
    Target Number = 2
Device Number = 7
    Channel Number = 1
    Target Number = 3
SPAN Number = 2
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 1
    Target Number = 4
Device Number = 1
    Channel Number = 1
    Target Number = 5
Device Number = 2
```

```

    Channel Number = 1
    Target Number = 10
Device Number = 3
    Channel Number = 1
    Target Number = 11
Device Number = 4
    Channel Number = 1
    Target Number = 12
Device Number = 5
    Channel Number = 1
    Target Number = 13
Device Number = 6
    Channel Number = 1
    Target Number = 14
Device Number = 7
    Channel Number = 1
    Target Number = 15
SPAN Number = 3
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 2
    Target Number = 0
Device Number = 1
    Channel Number = 2
    Target Number = 1
Device Number = 2
    Channel Number = 2
    Target Number = 2
Device Number = 3
    Channel Number = 2
    Target Number = 3
Device Number = 4
    Channel Number = 2
    Target Number = 4
Device Number = 5
    Channel Number = 2
    Target Number = 5
Device Number = 6
    Channel Number = 2
    Target Number = 10
Device Number = 7
    Channel Number = 2
    Target Number = 11
SPAN Number = 4
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 2
    Target Number = 12
Device Number = 1
    Channel Number = 2
    Target Number = 13
```

```

Device Number = 2
  Channel Number = 2
  Target Number = 14
Device Number = 3
  Channel Number = 2
  Target Number = 15
Device Number = 4
  Channel Number = 3
  Target Number = 0
Device Number = 5
  Channel Number = 3
  Target Number = 1
Device Number = 6
  Channel Number = 3
  Target Number = 2
Device Number = 7
  Channel Number = 3
  Target Number = 3
SPAN Number = 5
  Starting Block = 0
  Number of blocks = 17823744
Device Number = 0
  Channel Number = 3
  Target Number = 4
Device Number = 1
  Channel Number = 3
  Target Number = 5
Device Number = 2
  Channel Number = 3
  Target Number = 10
Device Number = 3
  Channel Number = 3
  Target Number = 11
Device Number = 4
  Channel Number = 3
  Target Number = 12
Device Number = 5
  Channel Number = 3
  Target Number = 13
Device Number = 6
  Channel Number = 3
  Target Number = 14
Device Number = 7
  Channel Number = 3
  Target Number = 15

```

```

(Channel 0, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

```

(Channel 0, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 0, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 1, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 1, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 1, ID 2)

```

Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE

Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

```

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)
  Type = HARDDISK,     Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,     Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,     Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,     Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 14)
  Type = HARDDISK,     Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,     Current Status = ONLINE
  Size 17823744 blocks

```

Adapter No: 1

Number of Logical Drives : 1

```

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL
  Stripe Size = 64KB,
  Status = OPTIMAL
  Write Policy = WRITE_THRU,
  Direct IO = DIRECT_IO,
  Number of Stripes = 8
  SPAN Number = 0
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0
      Target Number = 0
    Device Number = 1
      Channel Number = 0
      Target Number = 1
    Device Number = 2
      Channel Number = 0

```

```

      Target Number = 2
    Device Number = 3
      Channel Number = 0
      Target Number = 3
    Device Number = 4
      Channel Number = 0
      Target Number = 4
    Device Number = 5
      Channel Number = 0
      Target Number = 5
    Device Number = 6
      Channel Number = 0
      Target Number = 10
    Device Number = 7
      Channel Number = 0
      Target Number = 11
  SPAN Number = 1
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0
      Target Number = 12
    Device Number = 1
      Channel Number = 0
      Target Number = 13
    Device Number = 2
      Channel Number = 0
      Target Number = 14
    Device Number = 3
      Channel Number = 0
      Target Number = 15
    Device Number = 4
      Channel Number = 1
      Target Number = 0
    Device Number = 5
      Channel Number = 1
      Target Number = 1
    Device Number = 6
      Channel Number = 1
      Target Number = 2
    Device Number = 7
      Channel Number = 1
      Target Number = 3
  SPAN Number = 2
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 1
      Target Number = 4
    Device Number = 1
      Channel Number = 1
      Target Number = 5
    Device Number = 2

```

```

        Channel Number = 1
        Target Number = 10
Device Number = 3
        Channel Number = 1
        Target Number = 11
Device Number = 4
        Channel Number = 1
        Target Number = 12
Device Number = 5
        Channel Number = 1
        Target Number = 13
Device Number = 6
        Channel Number = 1
        Target Number = 14
Device Number = 7
        Channel Number = 1
        Target Number = 15
SPAN Number = 3
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 0
Device Number = 1
        Channel Number = 2
        Target Number = 1
Device Number = 2
        Channel Number = 2
        Target Number = 2
Device Number = 3
        Channel Number = 2
        Target Number = 3
Device Number = 4
        Channel Number = 2
        Target Number = 4
Device Number = 5
        Channel Number = 2
        Target Number = 5
Device Number = 6
        Channel Number = 2
        Target Number = 10
Device Number = 7
        Channel Number = 2
        Target Number = 11
SPAN Number = 4
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 12
Device Number = 1
        Channel Number = 2
        Target Number = 13

```

```

Device Number = 2
        Channel Number = 2
        Target Number = 14
Device Number = 3
        Channel Number = 2
        Target Number = 15
Device Number = 4
        Channel Number = 3
        Target Number = 0
Device Number = 5
        Channel Number = 3
        Target Number = 1
Device Number = 6
        Channel Number = 3
        Target Number = 2
Device Number = 7
        Channel Number = 3
        Target Number = 3
SPAN Number = 5
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 3
        Target Number = 4
Device Number = 1
        Channel Number = 3
        Target Number = 5
Device Number = 2
        Channel Number = 3
        Target Number = 10
Device Number = 3
        Channel Number = 3
        Target Number = 11
Device Number = 4
        Channel Number = 3
        Target Number = 12
Device Number = 5
        Channel Number = 3
        Target Number = 13
Device Number = 6
        Channel Number = 3
        Target Number = 14
Device Number = 7
        Channel Number = 3
        Target Number = 15

```

```

(Channel 0, ID 0)
Type = HARDDISK,           Current Status = ONLINE
Size 17823744 blocks

```



(Channel 0, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

```

Size 17823744 blocks
(Channel 2, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

```

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

Adapter No: 2

Number of Logical Drives : 1

```

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL
  Stripe Size = 64KB,
  Status = OPTIMAL
  Write Policy = WRITE_THRU,
  Direct IO = DIRECT_IO,
  Number of Stripes = 8
  SPAN Number = 0
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0
      Target Number = 0
    Device Number = 1
      Channel Number = 0
      Target Number = 1
    Device Number = 2
      Channel Number = 0

```

```

    Target Number = 2
Device Number = 3
    Channel Number = 0
    Target Number = 3
Device Number = 4
    Channel Number = 0
    Target Number = 4
Device Number = 5
    Channel Number = 0
    Target Number = 5
Device Number = 6
    Channel Number = 0
    Target Number = 10
Device Number = 7
    Channel Number = 0
    Target Number = 11
SPAN Number = 1
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 0
    Target Number = 12
Device Number = 1
    Channel Number = 0
    Target Number = 13
Device Number = 2
    Channel Number = 0
    Target Number = 14
Device Number = 3
    Channel Number = 0
    Target Number = 15
Device Number = 4
    Channel Number = 1
    Target Number = 0
Device Number = 5
    Channel Number = 1
    Target Number = 1
Device Number = 6
    Channel Number = 1
    Target Number = 2
Device Number = 7
    Channel Number = 1
    Target Number = 3
SPAN Number = 2
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 1
    Target Number = 4
Device Number = 1
    Channel Number = 1
    Target Number = 5
Device Number = 2
```

```

    Channel Number = 1
    Target Number = 10
Device Number = 3
    Channel Number = 1
    Target Number = 11
Device Number = 4
    Channel Number = 1
    Target Number = 12
Device Number = 5
    Channel Number = 1
    Target Number = 13
Device Number = 6
    Channel Number = 1
    Target Number = 14
Device Number = 7
    Channel Number = 1
    Target Number = 15
SPAN Number = 3
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 2
    Target Number = 0
Device Number = 1
    Channel Number = 2
    Target Number = 1
Device Number = 2
    Channel Number = 2
    Target Number = 2
Device Number = 3
    Channel Number = 2
    Target Number = 3
Device Number = 4
    Channel Number = 2
    Target Number = 4
Device Number = 5
    Channel Number = 2
    Target Number = 5
Device Number = 6
    Channel Number = 2
    Target Number = 10
Device Number = 7
    Channel Number = 2
    Target Number = 11
SPAN Number = 4
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 2
    Target Number = 12
Device Number = 1
    Channel Number = 2
    Target Number = 13
```

Device Number = 2  
     Channel Number = 2  
     Target Number = 14  
 Device Number = 3  
     Channel Number = 2  
     Target Number = 15  
 Device Number = 4  
     Channel Number = 3  
     Target Number = 0  
 Device Number = 5  
     Channel Number = 3  
     Target Number = 1  
 Device Number = 6  
     Channel Number = 3  
     Target Number = 2  
 Device Number = 7  
     Channel Number = 3  
     Target Number = 3  
 SPAN Number = 5  
     Starting Block = 0  
     Number of blocks = 17823744  
 Device Number = 0  
     Channel Number = 3  
     Target Number = 4  
 Device Number = 1  
     Channel Number = 3  
     Target Number = 5  
 Device Number = 2  
     Channel Number = 3  
     Target Number = 10  
 Device Number = 3  
     Channel Number = 3  
     Target Number = 11  
 Device Number = 4  
     Channel Number = 3  
     Target Number = 12  
 Device Number = 5  
     Channel Number = 3  
     Target Number = 13  
 Device Number = 6  
     Channel Number = 3  
     Target Number = 14  
 Device Number = 7  
     Channel Number = 3  
     Target Number = 15

(Channel 0, ID 0)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks

(Channel 0, ID 1)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 2)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 3)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 4)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 5)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 10)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 11)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 12)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 13)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 14)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 0, ID 15)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 1, ID 0)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 1, ID 1)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
 (Channel 1, ID 2)

Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE

Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

```

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

Adapter No: 3

Number of Logical Drives : 1

```

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL
  Stripe Size = 64KB,
  Status = OPTIMAL
  Write Policy = WRITE_THRU,
  Direct IO = DIRECT_IO,
  Number of Stripes = 8
  SPAN Number = 0
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0
      Target Number = 0
    Device Number = 1
      Channel Number = 0
      Target Number = 1
    Device Number = 2
      Channel Number = 0

```

```

    Target Number = 2
  Device Number = 3
    Channel Number = 0
    Target Number = 3
  Device Number = 4
    Channel Number = 0
    Target Number = 4
  Device Number = 5
    Channel Number = 0
    Target Number = 5
  Device Number = 6
    Channel Number = 0
    Target Number = 10
  Device Number = 7
    Channel Number = 0
    Target Number = 11
SPAN Number = 1
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 0
    Target Number = 12
  Device Number = 1
    Channel Number = 0
    Target Number = 13
  Device Number = 2
    Channel Number = 0
    Target Number = 14
  Device Number = 3
    Channel Number = 0
    Target Number = 15
  Device Number = 4
    Channel Number = 1
    Target Number = 0
  Device Number = 5
    Channel Number = 1
    Target Number = 1
  Device Number = 6
    Channel Number = 1
    Target Number = 2
  Device Number = 7
    Channel Number = 1
    Target Number = 3
SPAN Number = 2
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 1
    Target Number = 4
  Device Number = 1
    Channel Number = 1
    Target Number = 5
  Device Number = 2

```

```

        Channel Number = 1
        Target Number = 10
Device Number = 3
        Channel Number = 1
        Target Number = 11
Device Number = 4
        Channel Number = 1
        Target Number = 12
Device Number = 5
        Channel Number = 1
        Target Number = 13
Device Number = 6
        Channel Number = 1
        Target Number = 14
Device Number = 7
        Channel Number = 1
        Target Number = 15
SPAN Number = 3
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 0
Device Number = 1
        Channel Number = 2
        Target Number = 1
Device Number = 2
        Channel Number = 2
        Target Number = 2
Device Number = 3
        Channel Number = 2
        Target Number = 3
Device Number = 4
        Channel Number = 2
        Target Number = 4
Device Number = 5
        Channel Number = 2
        Target Number = 5
Device Number = 6
        Channel Number = 2
        Target Number = 10
Device Number = 7
        Channel Number = 2
        Target Number = 11
SPAN Number = 4
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 12
Device Number = 1
        Channel Number = 2
        Target Number = 13

```

```

Device Number = 2
        Channel Number = 2
        Target Number = 14
Device Number = 3
        Channel Number = 2
        Target Number = 15
Device Number = 4
        Channel Number = 3
        Target Number = 0
Device Number = 5
        Channel Number = 3
        Target Number = 1
Device Number = 6
        Channel Number = 3
        Target Number = 2
Device Number = 7
        Channel Number = 3
        Target Number = 3
SPAN Number = 5
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 3
        Target Number = 4
Device Number = 1
        Channel Number = 3
        Target Number = 5
Device Number = 2
        Channel Number = 3
        Target Number = 10
Device Number = 3
        Channel Number = 3
        Target Number = 11
Device Number = 4
        Channel Number = 3
        Target Number = 12
Device Number = 5
        Channel Number = 3
        Target Number = 13
Device Number = 6
        Channel Number = 3
        Target Number = 14
Device Number = 7
        Channel Number = 3
        Target Number = 15

```

```

(Channel 0, ID 0)
Type = HARDDISK,          Current Status = ONLINE
Size 17823744 blocks

```

(Channel 0, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks



```

Size 17823744 blocks
(Channel 2, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 2, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

```

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks
(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

Adapter No: 4

Number of Logical Drives : 1

```

Logical Drive = 0
  Span Depth = 4
  Raid Level = 1,
  Read Ahead = NORMAL
  Stripe Size = 128KB,
  Status = OPTIMAL
  Write Policy = WRITE_THRU,
  Direct IO = DIRECT_IO,
  Number of Stripes = 2
  SPAN Number = 0
    Starting Block = 0
    Number of blocks = 71157760
    Device Number = 0
      Channel Number = 0
      Target Number = 0
    Device Number = 1
      Channel Number = 1
      Target Number = 0
  SPAN Number = 1
    Starting Block = 0

```

```

Number of blocks = 71157760
Device Number = 0
  Channel Number = 0
  Target Number = 1
Device Number = 1
  Channel Number = 1
  Target Number = 1
SPAN Number = 2
  Starting Block = 0
  Number of blocks = 71157760
  Device Number = 0
    Channel Number = 0
    Target Number = 2
  Device Number = 1
    Channel Number = 1
    Target Number = 2
SPAN Number = 3
  Starting Block = 0
  Number of blocks = 71157760
  Device Number = 0
    Channel Number = 0
    Target Number = 3
  Device Number = 1
    Channel Number = 1
    Target Number = 3

(Channel 0, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 0, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 0, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 0, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 1, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 1, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

```

```

(Channel 1, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 1, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

Adapter No: 5

Number of Logical Drives : 1

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL
  Stripe Size = 64KB,
  Status = OPTIMAL
  Write Policy = WRITE_THRU,
  Direct IO = DIRECT_IO,
  Number of Stripes = 8
  SPAN Number = 0
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0
      Target Number = 0
    Device Number = 1
      Channel Number = 0
      Target Number = 1
    Device Number = 2
      Channel Number = 0
      Target Number = 2
    Device Number = 3
      Channel Number = 0
      Target Number = 3
    Device Number = 4
      Channel Number = 0
      Target Number = 4
    Device Number = 5
      Channel Number = 0
      Target Number = 5
    Device Number = 6
      Channel Number = 0
      Target Number = 10
    Device Number = 7
      Channel Number = 0
      Target Number = 11
  SPAN Number = 1
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0

```

```
    Target Number = 12
Device Number = 1
    Channel Number = 0
    Target Number = 13
Device Number = 2
    Channel Number = 0
    Target Number = 14
Device Number = 3
    Channel Number = 0
    Target Number = 15
Device Number = 4
    Channel Number = 1
    Target Number = 0
Device Number = 5
    Channel Number = 1
    Target Number = 1
Device Number = 6
    Channel Number = 1
    Target Number = 2
Device Number = 7
    Channel Number = 1
    Target Number = 3
SPAN Number = 2
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 1
    Target Number = 4
Device Number = 1
    Channel Number = 1
    Target Number = 5
Device Number = 2
    Channel Number = 1
    Target Number = 10
Device Number = 3
    Channel Number = 1
    Target Number = 11
Device Number = 4
    Channel Number = 1
    Target Number = 12
Device Number = 5
    Channel Number = 1
    Target Number = 13
Device Number = 6
    Channel Number = 1
    Target Number = 14
Device Number = 7
    Channel Number = 1
    Target Number = 15
SPAN Number = 3
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
```

```
    Channel Number = 2
    Target Number = 0
Device Number = 1
    Channel Number = 2
    Target Number = 1
Device Number = 2
    Channel Number = 2
    Target Number = 2
Device Number = 3
    Channel Number = 2
    Target Number = 3
Device Number = 4
    Channel Number = 2
    Target Number = 4
Device Number = 5
    Channel Number = 2
    Target Number = 5
Device Number = 6
    Channel Number = 2
    Target Number = 10
Device Number = 7
    Channel Number = 2
    Target Number = 11
SPAN Number = 4
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 2
    Target Number = 12
Device Number = 1
    Channel Number = 2
    Target Number = 13
Device Number = 2
    Channel Number = 2
    Target Number = 14
Device Number = 3
    Channel Number = 2
    Target Number = 15
Device Number = 4
    Channel Number = 3
    Target Number = 0
Device Number = 5
    Channel Number = 3
    Target Number = 1
Device Number = 6
    Channel Number = 3
    Target Number = 2
Device Number = 7
    Channel Number = 3
    Target Number = 3
SPAN Number = 5
    Starting Block = 0
    Number of blocks = 17823744
```

Device Number = 0  
     Channel Number = 3  
     Target Number = 4  
 Device Number = 1  
     Channel Number = 3  
     Target Number = 5  
 Device Number = 2  
     Channel Number = 3  
     Target Number = 10  
 Device Number = 3  
     Channel Number = 3  
     Target Number = 11  
 Device Number = 4  
     Channel Number = 3  
     Target Number = 12  
 Device Number = 5  
     Channel Number = 3  
     Target Number = 13  
 Device Number = 6  
     Channel Number = 3  
     Target Number = 14  
 Device Number = 7  
     Channel Number = 3  
     Target Number = 15

(Channel 0, ID 0)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 1)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 2)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 3)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 4)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 5)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 10)

    Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 11)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 12)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 13)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 14)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 15)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 0)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 1)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 2)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 3)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 4)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 5)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 10)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 11)  
     Type = HARDDISK,      Current Status = ONLINE

Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 14)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 3, ID 15)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

Adapter No: 6

Number of Logical Drives : 1

Logical Drive = 0  
Span Depth = 6  
Raid Level = 0,  
Read Ahead = NORMAL  
Stripe Size = 64KB,  
Status = OPTIMAL  
Write Policy = WRITE\_THRU,  
Direct IO = DIRECT\_IO,  
Number of Stripes = 8  
SPAN Number = 0  
Starting Block = 0  
Number of blocks = 17823744  
Device Number = 0  
Channel Number = 0  
Target Number = 0  
Device Number = 1  
Channel Number = 0  
Target Number = 1  
Device Number = 2  
Channel Number = 0  
Target Number = 2  
Device Number = 3  
Channel Number = 0  
Target Number = 3  
Device Number = 4  
Channel Number = 0  
Target Number = 4  
Device Number = 5  
Channel Number = 0  
Target Number = 5  
Device Number = 6  
Channel Number = 0  
Target Number = 10  
Device Number = 7  
Channel Number = 0  
Target Number = 11  
SPAN Number = 1  
Starting Block = 0  
Number of blocks = 17823744  
Device Number = 0  
Channel Number = 0

Target Number = 12  
Device Number = 1  
Channel Number = 0  
Target Number = 13  
Device Number = 2  
Channel Number = 0  
Target Number = 14  
Device Number = 3  
Channel Number = 0  
Target Number = 15  
Device Number = 4  
Channel Number = 1  
Target Number = 0  
Device Number = 5  
Channel Number = 1  
Target Number = 1  
Device Number = 6  
Channel Number = 1  
Target Number = 2  
Device Number = 7  
Channel Number = 1  
Target Number = 3  
SPAN Number = 2  
Starting Block = 0  
Number of blocks = 17823744  
Device Number = 0  
Channel Number = 1  
Target Number = 4  
Device Number = 1  
Channel Number = 1  
Target Number = 5  
Device Number = 2  
Channel Number = 1  
Target Number = 10  
Device Number = 3  
Channel Number = 1  
Target Number = 11  
Device Number = 4  
Channel Number = 1  
Target Number = 12  
Device Number = 5  
Channel Number = 1  
Target Number = 13  
Device Number = 6  
Channel Number = 1  
Target Number = 14  
Device Number = 7  
Channel Number = 1  
Target Number = 15  
SPAN Number = 3  
Starting Block = 0  
Number of blocks = 17823744  
Device Number = 0

```

        Channel Number = 2
        Target Number = 0
Device Number = 1
        Channel Number = 2
        Target Number = 1
Device Number = 2
        Channel Number = 2
        Target Number = 2
Device Number = 3
        Channel Number = 2
        Target Number = 3
Device Number = 4
        Channel Number = 2
        Target Number = 4
Device Number = 5
        Channel Number = 2
        Target Number = 5
Device Number = 6
        Channel Number = 2
        Target Number = 10
Device Number = 7
        Channel Number = 2
        Target Number = 11
SPAN Number = 4
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 12
Device Number = 1
        Channel Number = 2
        Target Number = 13
Device Number = 2
        Channel Number = 2
        Target Number = 14
Device Number = 3
        Channel Number = 2
        Target Number = 15
Device Number = 4
        Channel Number = 3
        Target Number = 0
Device Number = 5
        Channel Number = 3
        Target Number = 1
Device Number = 6
        Channel Number = 3
        Target Number = 2
Device Number = 7
        Channel Number = 3
        Target Number = 3
SPAN Number = 5
    Starting Block = 0
    Number of blocks = 17823744

```

```

Device Number = 0
        Channel Number = 3
        Target Number = 4
Device Number = 1
        Channel Number = 3
        Target Number = 5
Device Number = 2
        Channel Number = 3
        Target Number = 10
Device Number = 3
        Channel Number = 3
        Target Number = 11
Device Number = 4
        Channel Number = 3
        Target Number = 12
Device Number = 5
        Channel Number = 3
        Target Number = 13
Device Number = 6
        Channel Number = 3
        Target Number = 14
Device Number = 7
        Channel Number = 3
        Target Number = 15

```

```

(Channel 0, ID 0)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 1)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 2)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 3)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 4)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 5)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 10)

```

Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE

Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks



```

(Channel 2, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

```

(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

Adapter No: 7

Number of Logical Drives : 1

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL
  Stripe Size = 64KB,
  Status = OPTIMAL
  Write Policy = WRITE_THRU,
  Direct IO = DIRECT_IO,
  Number of Stripes = 8
  SPAN Number = 0
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0
      Target Number = 0
    Device Number = 1
      Channel Number = 0
      Target Number = 1
    Device Number = 2
      Channel Number = 0
      Target Number = 2
    Device Number = 3
      Channel Number = 0
      Target Number = 3
    Device Number = 4
      Channel Number = 0
      Target Number = 4
    Device Number = 5
      Channel Number = 0
      Target Number = 5
    Device Number = 6
      Channel Number = 0
      Target Number = 10
    Device Number = 7
      Channel Number = 0
      Target Number = 11
  SPAN Number = 1
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0

```

```

    Target Number = 12
Device Number = 1
    Channel Number = 0
    Target Number = 13
Device Number = 2
    Channel Number = 0
    Target Number = 14
Device Number = 3
    Channel Number = 0
    Target Number = 15
Device Number = 4
    Channel Number = 1
    Target Number = 0
Device Number = 5
    Channel Number = 1
    Target Number = 1
Device Number = 6
    Channel Number = 1
    Target Number = 2
Device Number = 7
    Channel Number = 1
    Target Number = 3
SPAN Number = 2
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 1
    Target Number = 4
Device Number = 1
    Channel Number = 1
    Target Number = 5
Device Number = 2
    Channel Number = 1
    Target Number = 10
Device Number = 3
    Channel Number = 1
    Target Number = 11
Device Number = 4
    Channel Number = 1
    Target Number = 12
Device Number = 5
    Channel Number = 1
    Target Number = 13
Device Number = 6
    Channel Number = 1
    Target Number = 14
Device Number = 7
    Channel Number = 1
    Target Number = 15
SPAN Number = 3
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0

```

```

    Channel Number = 2
    Target Number = 0
Device Number = 1
    Channel Number = 2
    Target Number = 1
Device Number = 2
    Channel Number = 2
    Target Number = 2
Device Number = 3
    Channel Number = 2
    Target Number = 3
Device Number = 4
    Channel Number = 2
    Target Number = 4
Device Number = 5
    Channel Number = 2
    Target Number = 5
Device Number = 6
    Channel Number = 2
    Target Number = 10
Device Number = 7
    Channel Number = 2
    Target Number = 11
SPAN Number = 4
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 2
    Target Number = 12
Device Number = 1
    Channel Number = 2
    Target Number = 13
Device Number = 2
    Channel Number = 2
    Target Number = 14
Device Number = 3
    Channel Number = 2
    Target Number = 15
Device Number = 4
    Channel Number = 3
    Target Number = 0
Device Number = 5
    Channel Number = 3
    Target Number = 1
Device Number = 6
    Channel Number = 3
    Target Number = 2
Device Number = 7
    Channel Number = 3
    Target Number = 3
SPAN Number = 5
    Starting Block = 0
    Number of blocks = 17823744

```

Device Number = 0  
     Channel Number = 3  
     Target Number = 4  
 Device Number = 1  
     Channel Number = 3  
     Target Number = 5  
 Device Number = 2  
     Channel Number = 3  
     Target Number = 10  
 Device Number = 3  
     Channel Number = 3  
     Target Number = 11  
 Device Number = 4  
     Channel Number = 3  
     Target Number = 12  
 Device Number = 5  
     Channel Number = 3  
     Target Number = 13  
 Device Number = 6  
     Channel Number = 3  
     Target Number = 14  
 Device Number = 7  
     Channel Number = 3  
     Target Number = 15

(Channel 0, ID 0)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 1)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 2)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 3)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 4)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 5)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 10)

    Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 11)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 12)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 13)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 14)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 0, ID 15)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 0)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 1)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 2)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 3)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 4)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 5)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 10)  
     Type = HARDDISK,      Current Status = ONLINE  
     Size 17823744 blocks  
  
 (Channel 1, ID 11)  
     Type = HARDDISK,      Current Status = ONLINE

Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 14)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 3, ID 15)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

Adapter No: 8

Number of Logical Drives : 1

Logical Drive = 0  
Span Depth = 6  
Raid Level = 0,  
Read Ahead = NORMAL  
Stripe Size = 64KB,  
Status = OPTIMAL  
Write Policy = WRITE\_THRU,  
Direct IO = DIRECT\_IO,  
Number of Stripes = 8  
SPAN Number = 0  
Starting Block = 0  
Number of blocks = 17823744  
Device Number = 0  
Channel Number = 0  
Target Number = 0  
Device Number = 1  
Channel Number = 0  
Target Number = 1  
Device Number = 2  
Channel Number = 0  
Target Number = 2  
Device Number = 3  
Channel Number = 0  
Target Number = 3  
Device Number = 4  
Channel Number = 0  
Target Number = 4  
Device Number = 5  
Channel Number = 0  
Target Number = 5  
Device Number = 6  
Channel Number = 0  
Target Number = 10  
Device Number = 7  
Channel Number = 0  
Target Number = 11  
SPAN Number = 1  
Starting Block = 0  
Number of blocks = 17823744  
Device Number = 0  
Channel Number = 0

Target Number = 12  
Device Number = 1  
Channel Number = 0  
Target Number = 13  
Device Number = 2  
Channel Number = 0  
Target Number = 14  
Device Number = 3  
Channel Number = 0  
Target Number = 15  
Device Number = 4  
Channel Number = 1  
Target Number = 0  
Device Number = 5  
Channel Number = 1  
Target Number = 1  
Device Number = 6  
Channel Number = 1  
Target Number = 2  
Device Number = 7  
Channel Number = 1  
Target Number = 3  
SPAN Number = 2  
Starting Block = 0  
Number of blocks = 17823744  
Device Number = 0  
Channel Number = 1  
Target Number = 4  
Device Number = 1  
Channel Number = 1  
Target Number = 5  
Device Number = 2  
Channel Number = 1  
Target Number = 10  
Device Number = 3  
Channel Number = 1  
Target Number = 11  
Device Number = 4  
Channel Number = 1  
Target Number = 12  
Device Number = 5  
Channel Number = 1  
Target Number = 13  
Device Number = 6  
Channel Number = 1  
Target Number = 14  
Device Number = 7  
Channel Number = 1  
Target Number = 15  
SPAN Number = 3  
Starting Block = 0  
Number of blocks = 17823744  
Device Number = 0

```

        Channel Number = 2
        Target Number = 0
Device Number = 1
        Channel Number = 2
        Target Number = 1
Device Number = 2
        Channel Number = 2
        Target Number = 2
Device Number = 3
        Channel Number = 2
        Target Number = 3
Device Number = 4
        Channel Number = 2
        Target Number = 4
Device Number = 5
        Channel Number = 2
        Target Number = 5
Device Number = 6
        Channel Number = 2
        Target Number = 10
Device Number = 7
        Channel Number = 2
        Target Number = 11
SPAN Number = 4
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 12
Device Number = 1
        Channel Number = 2
        Target Number = 13
Device Number = 2
        Channel Number = 2
        Target Number = 14
Device Number = 3
        Channel Number = 2
        Target Number = 15
Device Number = 4
        Channel Number = 3
        Target Number = 0
Device Number = 5
        Channel Number = 3
        Target Number = 1
Device Number = 6
        Channel Number = 3
        Target Number = 2
Device Number = 7
        Channel Number = 3
        Target Number = 3
SPAN Number = 5
    Starting Block = 0
    Number of blocks = 17823744

```

```

Device Number = 0
        Channel Number = 3
        Target Number = 4
Device Number = 1
        Channel Number = 3
        Target Number = 5
Device Number = 2
        Channel Number = 3
        Target Number = 10
Device Number = 3
        Channel Number = 3
        Target Number = 11
Device Number = 4
        Channel Number = 3
        Target Number = 12
Device Number = 5
        Channel Number = 3
        Target Number = 13
Device Number = 6
        Channel Number = 3
        Target Number = 14
Device Number = 7
        Channel Number = 3
        Target Number = 15

```

```

(Channel 0, ID 0)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 1)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 2)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 3)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 4)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 5)
    Type = HARDDISK,      Current Status = ONLINE
    Size 17823744 blocks

(Channel 0, ID 10)

```

Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE

Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

```

(Channel 2, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

```

(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

Microsoft Diagnostics Report For \\SPIDER

OS Version Report

```

Microsoft (R) Windows NT (TM) Server
Version 4.0 (Build 1381: Service Pack 5) x86 Multiprocessor Free
Registered Owner: TPC-C PerfLab, Siemens
Product Number: 36397-OEM-0029424-01381

```

Services Report

```

-----
Alerter                               Stopped   (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation

Computer Browser                       Stopped   (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
    LanmanServer
    LmHosts

ClipBook Server                         Stopped   (Manual)
  C:\WINNT\system32\clipsrv.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
    NetDDE

DHCP Client (TDI)                       Stopped   (Disabled)
  C:\WINNT\System32\services.exe

```



Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Service Dependencies: Tcpip Afd NetBT			NTLMSSP		
EventLog (Event log) C:\WINNT\system32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process	Running	(Automatic)	MSSQLServer C:\MSSQL7\bin\sqlservr.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process	Stopped	(Manual)
Server C:\WINNT\System32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Group Dependencies: TDI	Stopped	(Manual)	Network DDE (NetDDEGroup) C:\WINNT\system32\netdde.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Service Dependencies: NetDDESDM	Stopped	(Manual)
Workstation (NetworkProvider) C:\WINNT\System32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Group Dependencies: TDI	Running	(Automatic)	Network DDE DSDM C:\WINNT\system32\netdde.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process	Stopped	(Manual)
License Logging Service C:\WINNT\System32\llssrv.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process	Stopped	(Manual)	Net Logon (RemoteValidation) C:\WINNT\System32\lsass.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Service Dependencies: LanmanWorkstation LmHosts	Stopped	(Manual)
TCP/IP NetBIOS Helper C:\WINNT\System32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Group Dependencies: NetworkProvider	Stopped	(Manual)	NT LM Security Support Provider C:\WINNT\System32\SERVICES.EXE Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process	Stopped	(Disabled)
Messenger C:\WINNT\System32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Service Dependencies: LanmanWorkstation NetBios	Running	(Automatic)	Plug and Play (PlugPlay) C:\WINNT\system32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process	Stopped	(Manual)
MSDTC (MS Transactions) C:\WINNT\System32\msdtc.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process Service Dependencies: RPCSS	Stopped	(Disabled)	Protected Storage c:\winnt\system32\pstores.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process, Interactive Service Dependencies: RpcSs	Stopped	(Manual)
			Directory Replicator C:\WINNT\System32\lmrepl.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process Service Dependencies: LanmanWorkstation LanmanServer	Stopped	(Manual)
			Remote Procedure Call (RPC) Locator C:\WINNT\System32\LOCATOR.EXE	Stopped	(Manual)

```

Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Own Process
Service Dependencies:
  LanmanWorkstation
  Rdr
Remote Procedure Call (RPC) Service      Running   (Automatic)
  C:\WINNT\system32\RpcSs.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Schedule                                  Stopped   (Manual)
  C:\WINNT\System32\AtSvc.Exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Spooler (SpoolerGroup)                   Stopped   (Disabled)
  C:\WINNT\system32\spoolss.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process, Interactive
SQLServerAgent                           Stopped   (Manual)
  C:\MSSQL7\bin\sqlagent.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
    MSSQLServer
Telephony Service                         Stopped   (Manual)
  C:\WINNT\system32\tapisrv.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
UPS                                        Stopped   (Manual)
  C:\WINNT\System32\ups.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process

```

Drivers Report

```

-----
Abiosdisk (Primary disk)                  Stopped   (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
AFD Networking Support Environment (TDI)   Running   (Automatic)
  C:\WINNT\System32\drivers\afd.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Ahal154x (SCSI miniport)                  Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process

```

```

Ahal174x (SCSI miniport)                  Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
aic78xx (SCSI miniport)                   Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Always (SCSI miniport)                    Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
ami0nt (SCSI miniport)                    Stopped   (Disabled)
  C:\WINNT\System32\DRIVERS\ami0nt.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
amsint (SCSI miniport)                    Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Arrow (SCSI miniport)                     Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
atapi (SCSI miniport)                      Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Atdisk (Primary disk)                     Stopped   (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
ati (Video)                                Stopped   (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Beep (Base)                                Running   (System)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
BusLogic (SCSI miniport)                  Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Busmouse (Pointer Port)                   Stopped   (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Cdaudio (Filter)                           Stopped   (System)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Cdfs (File system)                         Running   (Disabled)
  Error Severity: Normal
  Service Flags: File System Driver, Shared Process
  Group Dependencies:
    SCSI CDROM Class
Cdrom (SCSI CDROM Class)                   Running   (System)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
  Group Dependencies:
    SCSI miniport
Changer (Filter)                           Stopped   (System)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process

```

```

cirrus (Video) Running (System)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Cpqarray (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
cpqfw2e (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
dac960nt (SCSI miniport) Stopped (Disabled)
  C:\WINNT\System32\drivers\dac960nt.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
dce376nt (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Delldsa (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Dell_DGX (Video) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Disk (SCSI Class) Running (Boot)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
  Group Dependencies:
    SCSI miniport
Diskperf (Filter) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
DptScsi (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
dte329x (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Intel(R) PRO NDIS Driver (NDIS) Running (Automatic)
  C:\WINNT\System32\drivers\E100BNT.SYS
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
et4000 (Video) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Fastfat (Boot file system) Running (Disabled)
  Error Severity: Normal
  Service Flags: File System Driver, Shared Process
Fd16_700 (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Fd7000ex (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Fd8xx (SCSI miniport) Stopped (Disabled)

```

```

  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
flashpnt (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Floppy (Primary disk) Running (System)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Ftdisk (Filter) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
i8042 Keyboard and PS/2 Mouse Port Driver (Keyboard Port) Running (System)
  System32\DRIVERS\i8042prt.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Inport (Pointer Port) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
intlfxsr (Base) Running (Boot)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Jazzg300 (Video) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Jazzg364 (Video) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Jzvxl484 (Video) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
Keyboard Class Driver (Keyboard Class) Running (System)
  System32\DRIVERS\kbdclass.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
KSecDD (Base) Running (System)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
macdisk (Filter) Stopped (Disabled)
  C:\WINNT\System32\drivers\macdisk.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
mga (Video) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
mga_mil (Video) Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
mitsumi (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
mkecr5xx (SCSI miniport) Stopped (Disabled)
  Error Severity: Normal

```

Service Flags: Kernel Driver, Shared Process  
 Modem (Extended base) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Mouse Class Driver (Pointer Class) Running (System)  
 System32\DRIVERS\mouclass.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 mraid (Primary disk) Running (Boot)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 MRAID35X (SCSI Miniport) Stopped (Disabled)  
 System32\DRIVERS\mraid35x.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Msfs (File system) Running (System)  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Mup (Network) Running (Manual)  
 C:\WINNT\System32\drivers\mup.sys  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Ncr53c9x (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 ncr77c22 (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Ncrc700 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Ncrc710 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Microsoft NDIS System Driver (NDIS) Running (System)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 NetBIOS Interface (NetBIOSGroup) Running (Manual)  
 C:\WINNT\System32\drivers\netbios.sys  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Group Dependencies:  
 TDI  
 WINS Client (TCP/IP) (PNP\_TDI) Running (Automatic)  
 C:\WINNT\System32\drivers\netbt.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
 Tcpiip  
 NetDetect Stopped (Manual)  
 C:\WINNT\system32\drivers\netdect.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process

Npfs (File system) Running (System)  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Ntfs (File system) Running (Disabled)  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Null (Base) Running (System)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Oliscsi (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Parallel (Extended base) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
 Parport  
 Group Dependencies:  
 Parallel arbitrator  
 Parport (Parallel arbitrator) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 ParVdm (Extended base) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
 Parport  
 Group Dependencies:  
 Parallel arbitrator  
 PCIDump (PCI Configuration) Stopped (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Pcmcia (System Bus Extender) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 PnP ISA Enabler Driver (Base) Stopped (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 psdisp (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Ql10wnt (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 qv (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Rdr (Network) Running (Manual)  
 C:\WINNT\System32\drivers\rdr.sys  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 s3 (Video) Stopped (Disabled)  
 Error Severity: Ignore

Service Flags: Kernel Driver, Shared Process  
 Scsiprnt (Extended base) Stopped (Automatic)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
   SCSI miniport  
 Scsiscan (SCSI Class) Running (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
   SCSI miniport  
 Serial (Extended base) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Sermouse (Pointer Port) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Sfloppy (Primary disk) Stopped (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
   SCSI miniport  
 Simbad (Filter) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 slcd32 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Sparrow (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Spock (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Srv (Network) Stopped (Manual)  
 C:\WINNT\System32\drivers\srv.sys  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 symc810 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 sym\_hi (SCSI miniport) Running (Boot)  
 C:\WINNT\System32\drivers\sym\_hi.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Sysdrv (Extended Base) Stopped (Manual)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 T128 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 T13B (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal

Service Flags: Kernel Driver, Shared Process  
 TCP/IP Service (PNP\_TDI) Running (Automatic)  
 C:\WINNT\System32\drivers\tcpip.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 tga (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 tmv1 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Ultra124 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Ultra14f (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Ultra24f (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 update (Base) Stopped (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 v7vram (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 VgaSave (Video Save) Stopped (System)  
 C:\WINNT\System32\drivers\vga.sys  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 VgaStart (Video Init) Stopped (System)  
 C:\WINNT\System32\drivers\vga.sys  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Wd33c93 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 wd90c24a (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 wdvga (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 weitekp9 (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Xga (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process

Environment Report

System Environment Variables

ComSpec=C:\WINNT\system32\cmd.exe  
NUMBER\_OF\_PROCESSORS=8  
OS=Windows\_NT  
Os2LibPath=C:\WINNT\system32\os2\dll;  
Path=C:\WINNT\system32;C:\WINNT;C:\MSSQL7\BINN  
PROCESSOR\_ARCHITECTURE=x86  
PROCESSOR\_IDENTIFIER=x86 Family 6 Model 7 Stepping 3, GenuineIntel  
PROCESSOR\_LEVEL=6  
PROCESSOR\_REVISION=0703  
windir=C:\WINNT

Environment Variables for Current User

TEMP=C:\TEMP  
TMP=C:\TEMP

Key Name: SYSTEM\CurrentControlSet\Services\E100B  
Class Name: <NO CLASS>  
Last Write Time: 12/6/99 - 8:47 AM  
Value 0  
Name: DisplayName  
Type: REG\_SZ  
Data: Intel(R) PRO NDIS Driver  
Value 1  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0x1  
Value 2  
Name: Group  
Type: REG\_SZ  
Data: NDIS  
Value 3  
Name: ImagePath  
Type: REG\_EXPAND\_SZ  
Data: \SystemRoot\System32\drivers\E100BNT.SYS  
Value 4  
Name: RequestedSystemResources  
Type: REG\_RESOURCE\_REQUIREMENTS\_LIST  
Data: Interface Type: Internal

Bus Number: 0  
Slot Number: 0

List 0

Descriptor 0  
Resource: Interrupt  
Option: 0x00000000  
Disposition: Shared  
Type: Level Sensitive  
Minimum Vector: 0x10  
Maximum Vector: 0x10

Descriptor 1  
Resource: Memory  
Option: 0x00000001  
Disposition: Device Exclusive  
Type: Write Only  
Length: 0x1000  
Alignment: 0x1000  
Minimum Address: 0xfa400000  
Maximum Address: 0xfa400fff

Descriptor 2  
Resource: Memory  
Option: 0x00000009  
Disposition: Device Exclusive  
Type: Write Only  
Length: 0x1000  
Alignment: 0x1000  
Minimum Address: 0xfa400000  
Maximum Address: 0xfa400fff

Descriptor 3  
Resource: Memory  
Option: 0x00000008  
Disposition: Device Exclusive  
Type: Write Only  
Length: 0x1000  
Alignment: 0x1000  
Minimum Address: 0xfa000000  
Maximum Address: 0xfa0fffff

Descriptor 4  
Resource: Port  
Option: 0x00000001  
Disposition: Device Exclusive  
Type: Port  
Length: 0x20  
Alignment: 0x20  
Minimum Address: 0x00002000  
Maximum Address: 0x0000201f

Descriptor 5  
Resource: Port

Option: 0x00000008  
Disposition: Device Exclusive  
Type: Port  
Length: 0x20  
Alignment: 0x20  
Minimum Address: 0x00002000  
Maximum Address: 0x0000201f

Descriptor 6  
Resource: Memory  
Option: 0x00000001  
Disposition: Device Exclusive  
Type: Read / Write  
Length: 0x100000  
Alignment: 0x100000  
Minimum Address: 0xfa000000  
Maximum Address: 0xfa0fffff

Descriptor 7  
Resource: Memory  
Option: 0x00000008  
Disposition: Device Exclusive  
Type: Read / Write  
Length: 0x100000  
Alignment: 0x100000  
Minimum Address: 0xfa000000  
Maximum Address: 0xfa0fffff

Value 5  
Name: Start  
Type: REG\_DWORD  
Data: 0x2

Value 6  
Name: Type  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Enum  
Class Name: <NO CLASS>  
Last Write Time: 12/6/99 - 8:46 AM  
Value 0  
Name: 0  
Type: REG\_SZ  
Data: Root\LEGACY\_E100B\0000

Value 1  
Name: Count  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: NextInstance  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Linkage  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:05 AM

Value 0  
Name: Bind  
Type: REG\_MULTI\_SZ  
Data: \Device\E100B1

Value 1  
Name: Export  
Type: REG\_MULTI\_SZ  
Data: \Device\E100B1

Value 2  
Name: Route  
Type: REG\_MULTI\_SZ  
Data: "E100B1"

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Linkage\Disabled  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:05 AM

Value 0  
Name: Bind  
Type: REG\_MULTI\_SZ  
Data:

Value 1  
Name: Export  
Type: REG\_MULTI\_SZ  
Data:

Value 2  
Name: Route  
Type: REG\_MULTI\_SZ  
Data:

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Parameters  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

```

Key Name:          SYSTEM\CurrentControlSet\Services\E100B\Security
Class Name:        <NO CLASS>
Last Write Time:   9/21/99 - 9:03 AM
Value 0
  Name:            Security
  Type:            REG_BINARY
  Data:
00000000  01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010  34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00  4.....
.....
00000020  ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030  20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040  8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050  4f 00 4b 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
O.K.....
00000060  00 00 00 05 20 00 00 00 - 23 02 00 00 44 00 44 00  ....
...#...D.D.
00000070  00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080  20 00 00 00 20 02 00 00 - 44 00 44 00 00 00 1c 00  ...
...D.D.....
00000090  ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0  25 02 00 00 44 00 44 00 - 00 00 18 00 fd 01 02 00
%...D.D.....
000000b0  01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....%...
000000c0  01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
000000d0  00 00 00 05 12 00 00 00 - .....

```

```

Key Name:          SYSTEM\CurrentControlSet\Services\E100B1
Class Name:        <NO CLASS>
Last Write Time:   9/21/99 - 9:04 AM
Value 0
  Name:            ErrorControl
  Type:            REG_DWORD
  Data:            0x1
Value 1
  Name:            Start
  Type:            REG_DWORD
  Data:            0x3
Value 2
  Name:            type
  Type:            REG_DWORD
  Data:            0x4

```

```

Key Name:          SYSTEM\CurrentControlSet\Services\E100B1\Linkage
Class Name:        <NO CLASS>
Last Write Time:   12/6/99 - 8:47 AM
Value 0
  Name:            Bind
  Type:            REG_MULTI_SZ
  Data:            \Device\E100B1
Value 1
  Name:            Export
  Type:            REG_MULTI_SZ
  Data:            \Device\E100B1
Value 2
  Name:            Route
  Type:            REG_MULTI_SZ
  Data:            "E100B1"

```

```

Key Name:          SYSTEM\CurrentControlSet\Services\E100B1\Linkage\Disabled
Class Name:        <NO CLASS>
Last Write Time:   9/21/99 - 9:04 AM

```

```

Key Name:          SYSTEM\CurrentControlSet\Services\E100B1\Parameters
Class Name:        <NO CLASS>
Last Write Time:   10/18/99 - 2:20 PM
Value 0
  Name:            Adaptive_IFS
  Type:            REG_DWORD
  Data:            0x1
Value 1
  Name:            BoardHasBridge
  Type:            REG_DWORD
  Data:            0
Value 2
  Name:            BusNumber
  Type:            REG_DWORD
  Data:            0x3

```



Value 3  
 Name: BusType  
 Type: REG\_DWORD  
 Data: 0x5

Value 4  
 Name: BusTypeLocal  
 Type: REG\_DWORD  
 Data: 0x5

Value 5  
 Name: Coalesce  
 Type: REG\_DWORD  
 Data: 0

Value 6  
 Name: CPUSaver  
 Type: REG\_DWORD  
 Data: 0x1000

Value 7  
 Name: ForceDpx  
 Type: REG\_DWORD  
 Data: 0x2

Value 8  
 Name: Location  
 Type: REG\_SZ  
 Data: 20c800

Value 9  
 Name: MediaType  
 Type: REG\_DWORD  
 Data: 0x1

Value 10  
 Name: MWIEnable  
 Type: REG\_DWORD  
 Data: 0

Value 11  
 Name: NetworkAddress  
 Type: REG\_SZ  
 Data:

Value 12  
 Name: NumCoalesce  
 Type: REG\_DWORD  
 Data: 0x20

Value 13  
 Name: NumRfd  
 Type: REG\_DWORD

Data: 0x80

Value 14  
 Name: NumTbdPerTcb  
 Type: REG\_DWORD  
 Data: 0xc

Value 15  
 Name: NumTcb  
 Type: REG\_DWORD  
 Data: 0x50

Value 16  
 Name: PacketTagging  
 Type: REG\_DWORD  
 Data: 0

Value 17  
 Name: PcNic  
 Type: REG\_DWORD  
 Data: 0x1

Value 18  
 Name: RxDmaCount  
 Type: REG\_DWORD  
 Data: 0

Value 19  
 Name: RxFifo  
 Type: REG\_DWORD  
 Data: 0x8

Value 20  
 Name: SlotNumber  
 Type: REG\_DWORD  
 Data: 0x4

Value 21  
 Name: Speed  
 Type: REG\_DWORD  
 Data: 0x64

Value 22  
 Name: Threshold  
 Type: REG\_DWORD  
 Data: 0x40

Value 23  
 Name: TxDmaCount  
 Type: REG\_DWORD  
 Data: 0

Value 24

Name: TxFifo  
 Type: REG\_DWORD  
 Data: 0x8

Value 25  
 Name: Txmitwait  
 Type: REG\_DWORD  
 Data: 0x1

Value 26  
 Name: UcodeSW  
 Type: REG\_DWORD  
 Data: 0x1

Value 27  
 Name: UnderrunRetry  
 Type: REG\_DWORD  
 Data: 0x1

Value 28  
 Name: UseIo  
 Type: REG\_DWORD  
 Data: 0x2

Value 29  
 Name: UseManualPCIAssign  
 Type: REG\_DWORD  
 Data: 0

Value 30  
 Name: VlanMode  
 Type: REG\_DWORD  
 Data: 0

Key Name:  
 SYSTEM\CurrentControlSet\Services\E100B1\Parameters\Tcpip  
 Class Name: GenericClass  
 Last Write Time: 12/6/99 - 8:47 AM

Value 0  
 Name: DefaultGateway  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: EnableDHCP  
 Type: REG\_DWORD  
 Data: 0

Value 2  
 Name: IPAddress  
 Type: REG\_MULTI\_SZ

Data: 129.103.181.189

Value 3  
 Name: IPInterfaceContext  
 Type: REG\_DWORD  
 Data: 0x1

Value 4  
 Name: IPInterfaceContextMax  
 Type: REG\_DWORD  
 Data: 0x1

Value 5  
 Name: LLInterface  
 Type: REG\_SZ  
 Data:

Value 6  
 Name: PPTPFiltering  
 Type: REG\_DWORD  
 Data: 0

Value 7  
 Name: RawIPAllowedProtocols  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 8  
 Name: SubnetMask  
 Type: REG\_MULTI\_SZ  
 Data: 255.255.255.0

Value 9  
 Name: TCPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 10  
 Name: UDPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 11  
 Name: UseZeroBroadcast  
 Type: REG\_DWORD  
 Data: 0

Key Name: SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\Adaptive\_IFS  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: Base  
Type: REG\_SZ  
Data: 10

Value 1  
Name: Default  
Type: REG\_SZ  
Data: 1

Value 2  
Name: Max  
Type: REG\_SZ  
Data: 255

Value 3  
Name: Min  
Type: REG\_SZ  
Data: 0

Value 4  
Name: MiniHelp  
Type: REG\_SZ  
Data:

Value 5  
Name: ParamDesc  
Type: REG\_SZ  
Data: Adaptive Inter-Frame Spacing

Value 6  
Name: Scale  
Type: REG\_SZ  
Data: 1

Value 7  
Name: Step  
Type: REG\_SZ  
Data: 1

Value 8  
Name: Type  
Type: REG\_SZ  
Data: int

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\Coalesce  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: Default  
Type: REG\_SZ  
Data: 0

Value 1  
Name: MiniHelp  
Type: REG\_SZ  
Data:

Value 2  
Name: ParamDesc  
Type: REG\_SZ  
Data: PCI Bus Efficiency

Value 3  
Name: Type  
Type: REG\_SZ  
Data: enum

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\Coalesce\Enum  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: 0  
Type: REG\_SZ  
Data: Disabled

Value 1  
Name: 1  
Type: REG\_SZ  
Data: Enabled

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\CPUSaver  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: Default  
Type: REG\_SZ

Data: 1536

Value 1  
 Name: LeftLabel  
 Type: REG\_SZ  
 Data: Adapter Bandwidth

Value 2  
 Name: MiniHelp  
 Type: REG\_SZ  
 Data: Sets optimal point of CPU/Adapter performance for this system. See help.

Value 3  
 Name: ParamDesc  
 Type: REG\_SZ  
 Data: Adaptive Performance Tuning

Value 4  
 Name: RightLabel  
 Type: REG\_SZ  
 Data: CPU Utilization

Value 5  
 Name: Type  
 Type: REG\_SZ  
 Data: slider

Key Name:  
 SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\CPUSaver\Values  
 Class Name: <NO CLASS>  
 Last Write Time: 9/21/99 - 9:04 AM

Value 0  
 Name: 0  
 Type: REG\_SZ  
 Data: 0

Value 1  
 Name: 1  
 Type: REG\_SZ  
 Data: 256

Value 2  
 Name: 10  
 Type: REG\_SZ  
 Data: 2560

Value 3  
 Name: 11  
 Type: REG\_SZ  
 Data: 2816

Value 4  
 Name: 12  
 Type: REG\_SZ  
 Data: 3072

Value 5  
 Name: 13  
 Type: REG\_SZ  
 Data: 3328

Value 6  
 Name: 14  
 Type: REG\_SZ  
 Data: 3584

Value 7  
 Name: 15  
 Type: REG\_SZ  
 Data: 3840

Value 8  
 Name: 16  
 Type: REG\_SZ  
 Data: 4096

Value 9  
 Name: 2  
 Type: REG\_SZ  
 Data: 512

Value 10  
 Name: 3  
 Type: REG\_SZ  
 Data: 768

Value 11  
 Name: 4  
 Type: REG\_SZ  
 Data: 1024

Value 12  
 Name: 5  
 Type: REG\_SZ  
 Data: 1280

Value 13  
 Name: 6  
 Type: REG\_SZ  
 Data: 1536

Value 14  
 Name: 7  
 Type: REG\_SZ

Data: 1792

Value 15  
Name: 8  
Type: REG\_SZ  
Data: 2048

Value 16  
Name: 9  
Type: REG\_SZ  
Data: 2304

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\ForceDpx  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: Default  
Type: REG\_SZ  
Data: 0

Value 1  
Name: MiniHelp  
Type: REG\_SZ  
Data:

Value 2  
Name: ParamDesc  
Type: REG\_SZ  
Data: Duplex

Value 3  
Name: Type  
Type: REG\_SZ  
Data: enum

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\ForceDpx\Enum  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: 0  
Type: REG\_SZ  
Data: Auto Detect

Value 1  
Name: 1  
Type: REG\_SZ  
Data: Half-Duplex

Value 2

Name: 2  
Type: REG\_SZ  
Data: Full-Duplex

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\NetworkAddress  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: Default  
Type: REG\_SZ  
Data:

Value 1  
Name: MiniHelp  
Type: REG\_SZ  
Data:

Value 2  
Name: ParamDesc  
Type: REG\_SZ  
Data: Locally Administered Address

Value 3  
Name: Type  
Type: REG\_SZ  
Data: edit

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\NumCoalesce  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: Base  
Type: REG\_SZ  
Data: 10

Value 1  
Name: Default  
Type: REG\_SZ  
Data: 8

Value 2  
Name: Max  
Type: REG\_SZ  
Data: 32

Value 3  
Name: Min  
Type: REG\_SZ  
Data: 1

```

Value 4
  Name:      MiniHelp
  Type:      REG_SZ
  Data:

Value 5
  Name:      ParamDesc
  Type:      REG_SZ
  Data:      Coalesce Buffers

Value 6
  Name:      Scale
  Type:      REG_SZ
  Data:      1

Value 7
  Name:      Step
  Type:      REG_SZ
  Data:      1

Value 8
  Name:      Type
  Type:      REG_SZ
  Data:      int

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\NumRfd
Class Name:      <NO CLASS>
Last Write Time: 9/21/99 - 9:04 AM
Value 0
  Name:      Base
  Type:      REG_SZ
  Data:      10

Value 1
  Name:      Default
  Type:      REG_SZ
  Data:      48

Value 2
  Name:      Max
  Type:      REG_SZ
  Data:      1024

Value 3
  Name:      Min
  Type:      REG_SZ
  Data:      1

Value 4
  Name:      MiniHelp

```

```

Type:      REG_SZ
Data:

Value 5
  Name:      ParamDesc
  Type:      REG_SZ
  Data:      Receive Buffers

Value 6
  Name:      Scale
  Type:      REG_SZ
  Data:      1

Value 7
  Name:      Step
  Type:      REG_SZ
  Data:      1

Value 8
  Name:      Type
  Type:      REG_SZ
  Data:      int

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\NumTcb
Class Name:      <NO CLASS>
Last Write Time: 9/21/99 - 9:04 AM
Value 0
  Name:      Base
  Type:      REG_SZ
  Data:      10

Value 1
  Name:      Default
  Type:      REG_SZ
  Data:      32

Value 2
  Name:      Max
  Type:      REG_SZ
  Data:      80

Value 3
  Name:      Min
  Type:      REG_SZ
  Data:      1

Value 4
  Name:      MiniHelp
  Type:      REG_SZ
  Data:

```

Value 5  
Name: ParamDesc  
Type: REG\_SZ  
Data: Transmit Control Blocks

Value 6  
Name: Scale  
Type: REG\_SZ  
Data: 1

Value 7  
Name: Step  
Type: REG\_SZ  
Data: 1

Value 8  
Name: Type  
Type: REG\_SZ  
Data: int

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\PacketTagging  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: Default  
Type: REG\_SZ  
Data: 0

Value 1  
Name: MiniHelp  
Type: REG\_SZ  
Data:

Value 2  
Name: ParamDesc  
Type: REG\_SZ  
Data: 802.1p/802.1q Tagging

Value 3  
Name: Type  
Type: REG\_SZ  
Data: enum

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\PacketTagging\Enum  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM  
Value 0  
Name: 0

Type: REG\_SZ  
Data: Disabled

Value 1  
Name: 1  
Type: REG\_SZ  
Data: Enabled

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\Speed  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: Default  
Type: REG\_SZ  
Data: 0

Value 1  
Name: MiniHelp  
Type: REG\_SZ  
Data:

Value 2  
Name: ParamDesc  
Type: REG\_SZ  
Data: Speed

Value 3  
Name: Type  
Type: REG\_SZ  
Data: enum

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\Speed\Enum  
Class Name: <NO CLASS>  
Last Write Time: 9/21/99 - 9:04 AM

Value 0  
Name: 0  
Type: REG\_SZ  
Data: Auto Detect

Value 1  
Name: 10  
Type: REG\_SZ  
Data: 10 Mbps

Value 2  
Name: 100  
Type: REG\_SZ  
Data: 100 Mbps

```

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\Threshold
Class Name: <NO CLASS>
Last Write Time: 9/21/99 - 9:04 AM
Value 0
  Name: Base
  Type: REG_SZ
  Data: 10
Value 1
  Name: Default
  Type: REG_SZ
  Data: 16
Value 2
  Name: Max
  Type: REG_SZ
  Data: 200
Value 3
  Name: Min
  Type: REG_SZ
  Data: 0
Value 4
  Name: MiniHelp
  Type: REG_SZ
  Data:
Value 5
  Name: ParamDesc
  Type: REG_SZ
  Data: Adaptive Transmit Threshold
Value 6
  Name: Scale
  Type: REG_SZ
  Data: 1
Value 7
  Name: Step
  Type: REG_SZ
  Data: 1
Value 8
  Name: Type
  Type: REG_SZ
  Data: int
Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\UcodeSW

```

```

Class Name: <NO CLASS>
Last Write Time: 9/21/99 - 9:04 AM
Value 0
  Name: Default
  Type: REG_SZ
  Data: 1
Value 1
  Name: MiniHelp
  Type: REG_SZ
  Data:
Value 2
  Name: ParamDesc
  Type: REG_SZ
  Data: Adaptive Technology
Value 3
  Name: Type
  Type: REG_SZ
  Data: enum

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\Params\UcodeSW\Enum
Class Name: <NO CLASS>
Last Write Time: 9/21/99 - 9:04 AM
Value 0
  Name: 0
  Type: REG_SZ
  Data: Off
Value 1
  Name: 1
  Type: REG_SZ
  Data: On

```

```

Key Name: SYSTEM\CurrentControlSet\Services\NDIS
Class Name: <NO CLASS>
Last Write Time: 10/10/96 - 9:09 AM
Value 0
  Name: DisplayName
  Type: REG_SZ
  Data: Microsoft NDIS System Driver
Value 1
  Name: ErrorControl
  Type: REG_DWORD
  Data: 0x1
Value 2
  Name: Group

```



```

Type:          REG_SZ
Data:          NDIS

Value 3
Name:          Start
Type:          REG_DWORD
Data:          0x1

Value 4
Name:          Type
Type:          REG_DWORD
Data:          0x1

Key Name:      SYSTEM\CurrentControlSet\Services\NDIS\Enum
Class Name:    <NO CLASS>
Last Write Time: 12/6/99 - 8:46 AM
Value 0
Name:          0
Type:          REG_SZ
Data:          Root\LEGACY_NDIS\0000

Value 1
Name:          Count
Type:          REG_DWORD
Data:          0x1

Value 2
Name:          NextInstance
Type:          REG_DWORD
Data:          0x1

Key Name:      SYSTEM\CurrentControlSet\Services\NDIS\MediaTypes
Class Name:    <NO CLASS>
Last Write Time: 10/10/96 - 9:09 AM

Key Name:      SYSTEM\CurrentControlSet\Services\NDIS\NetDetect
Class Name:    <NO CLASS>
Last Write Time: 10/10/96 - 9:09 AM

Key Name:      SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA
Class Name:    <NO CLASS>
Last Write Time: 10/10/96 - 9:09 AM

Key Name:      SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\3C592
Class Name:    <NO CLASS>
Last Write Time: 9/16/99 - 8:52 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x20596d50

```

```

Value 1
Name:          Mask
Type:          REG_DWORD
Data:          0xf0ffffff

Value 2
Name:          token
Type:          REG_SZ
Data:          3C592

Key Name:      SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\3C597
Class Name:    <NO CLASS>
Last Write Time: 9/16/99 - 8:52 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x70596d50

Value 1
Name:          Mask
Type:          REG_DWORD
Data:          0xf0ffffff

Value 2
Name:          token
Type:          REG_SZ
Data:          3C597

Key Name:      SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\BONSAI
Class Name:    <NO CLASS>
Last Write Time: 10/10/96 - 9:09 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x62110e

Value 1
Name:          Mask
Type:          REG_DWORD
Data:          0xfffff

Value 2
Name:          token
Type:          REG_SZ
Data:          BONSAI

```

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\C320TNT  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x32530e  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff  
Value 2  
Name: token  
Type: REG\_SZ  
Data: C320TNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\DE425  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x5042a310  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff  
Value 2  
Name: token  
Type: REG\_SZ  
Data: DE425

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\DEC300  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x230a310  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: DEC300

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\DEC422  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x2042a310

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: DEC422

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\DURANGO  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x260110e

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: DURANGO

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\ELNK3EISA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id

Type: REG\_DWORD  
Data: 0x90506d50

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: ELNK3EISA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\ES3210  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x12949

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: ES3210

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\F70XX  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x6690e

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: F70XX

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\FL32  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x1010d425

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: FL32

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\FLNK  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x776d50

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: FLNK

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\J2577A  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x4019f022

Value 1  
Name: Mask  
Type: REG\_DWORD

Data: 0xf0ffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: J2577A

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\MAPLE  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x160110e

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xfffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: MAPLE

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\NE3200  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x7cc3a

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xfffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NE3200

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\NETFLEX3  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x20f1110e

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\NETFLEX3.1  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x40f1110e

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\NETFLX  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x61110e

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xfffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NETFLX

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\NF3500  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x84633a

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NF3500

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\NPEISA.1  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: id  
Type: REG\_DWORD  
Data: 0x2093a

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NPEISA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\NPEISA.2  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: id  
Type: REG\_DWORD  
Data: 0x3093a

Value 1  
Name: Mask

Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NPEISA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\P1990  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x604f42

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: P1990

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\RODAN  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x63110e

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: RODAN

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\SKETHNT  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x2644d

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xfffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: SKETHNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\SKFENT  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x1644d

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xfffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: SKFENT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\SMC8232  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x80a34d

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xfffff

Value 2  
Name: token  
Type: REG\_SZ

Data: SMC8232

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\TLNK3E  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x9c616d50

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0fffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: TLNK3E

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EISA\TLNK3EISA  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x90616d50

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0fffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: TLNK3EISA

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\AT1700  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM

Value 0  
Name: Id

Type: REG\_DWORD  
Data: 0x6413

Value 1  
Name: token  
Type: REG\_SZ  
Data: AT1700

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\EE16MC  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x628b

Value 1  
Name: token  
Type: REG\_SZ  
Data: EE16MC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\E1INK527  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x41

Value 1  
Name: token  
Type: REG\_SZ  
Data: E1INK527

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\ELNK3MCA.1  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x627c

Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\ELNK3MCA.2  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x627d

Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\ELNK3MCA.3  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x61db

Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\ELNK3MCA.4  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x62f6

Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\ELNK3MCA.5  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD

Data: 0x62f7  
Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\ELNKMC  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x6042

Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNKMC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\F30XX  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x70

Value 1  
Name: token  
Type: REG\_SZ  
Data: F30XX

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\HPMCA  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x63ca

Value 1  
Name: token  
Type: REG\_SZ  
Data: HPMCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\IBMENIIN  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xffe0

Value 1  
Name: token  
Type: REG\_SZ  
Data: IBMENIIN

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\IBMTOKA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xe000

Value 1  
Name: token  
Type: REG\_SZ  
Data: IBMTOKA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\IBMTOKMC  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xe001

Value 1  
Name: token  
Type: REG\_SZ  
Data: IBMTOKMC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\IRMAtrac.1  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x5c1c



Value 1  
Name: token  
Type: REG\_SZ  
Data: IRMAtrac

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\IRMAtrac.2  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x5c1d

Value 1  
Name: token  
Type: REG\_SZ  
Data: IRMAtrac

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\NCRTOK  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x100

Value 1  
Name: token  
Type: REG\_SZ  
Data: NCRTOK

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\NPMCA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x69

Value 1  
Name: token  
Type: REG\_SZ  
Data: NPMCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\OCTK16.1  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xa84

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCTK16

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\OCTK16.2  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xa85

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCTK16

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\OCTK16.3  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xa86

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCTK16

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\QUADENET.1  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8f6d

Value 1  
Name: token  
Type: REG\_SZ  
Data: QUADENET

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\QUADENET.2  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8f6a

Value 1  
Name: token  
Type: REG\_SZ  
Data: QUADENET

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\SKFMNT.1  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x83

Value 1  
Name: token  
Type: REG\_SZ  
Data: SKFMNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\SKFMNT.2  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xab

Value 1  
Name: token  
Type: REG\_SZ  
Data: SKFMNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\STREAMER.1  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8fa0

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\STREAMER.2  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8fa2

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\STREAMER.3  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8fa8

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\STREAMER.4  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8faa

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\TC\$4046E  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x51

Value 1  
Name: token  
Type: REG\_SZ  
Data: TC\$4046E

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\UBPS  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x7012

Value 1  
Name: token  
Type: REG\_SZ  
Data: UBPS

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\WAVELAN\_MCA  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x6a14

Value 1  
Name: token  
Type: REG\_SZ  
Data: WAVELAN\_MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\WD8003EA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x67c0

Value 1  
Name: token  
Type: REG\_SZ  
Data: WD8003EA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\WD8003WA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x67c2

Value 1  
Name: token  
Type: REG\_SZ  
Data: WD8003WA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\WD8013EPA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x61c8

Value 1  
Name: token  
Type: REG\_SZ  
Data: WD8013EPA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA\WD8013WPA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x61c9

Value 1  
Name: token  
Type: REG\_SZ  
Data: WD8013WPA

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\3C590  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x590010b7

Value 1  
Name: token  
Type: REG\_SZ  
Data: 3C590

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\3C595  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x595010b7

Value 1  
Name: token  
Type: REG\_SZ  
Data: 3C595

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\3C905  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x905010b7

Value 1  
Name: token  
Type: REG\_SZ

Data: 3C905

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\ALANE0  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x59009004

Value 1  
Name: token  
Type: REG\_SZ  
Data: ALANE0

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\AMDPCI  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x20001022

Value 1  
Name: token  
Type: REG\_SZ  
Data: AMDPCI

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\DC21040  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x21011

Value 1  
Name: token  
Type: REG\_SZ  
Data: DC21040

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\DC21041  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x141011

Value 1  
Name: token  
Type: REG\_SZ  
Data: DC21041

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\DC21140  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x91011

Value 1  
Name: token  
Type: REG\_SZ  
Data: DC21140

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\DC21142  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x191011

Value 1  
Name: token  
Type: REG\_SZ  
Data: DC21142

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\DEFPA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 9:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xf1011

Value 1  
Name: token  
Type: REG\_SZ  
Data: DEFPA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\E100BPCI  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x12298086

Value 1  
Name: token  
Type: REG\_SZ  
Data: E100BPCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\E10PCI  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x12268086

Value 1  
Name: token  
Type: REG\_SZ  
Data: E10PCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\LEC  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x100110b6

Value 1  
Name: token  
Type: REG\_SZ  
Data: LEC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\NCPF  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id

Type: REG\_DWORD  
Data: 0x111bc

Value 1  
Name: token  
Type: REG\_SZ  
Data: NCPF

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\NETFLEX3.1  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xf1300e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\NETFLEX3.2  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae320e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\NETFLEX3.3  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae340e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\NETFLEX3.4  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae350e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\NETFLEX3.5  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae430e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\NETFLEX3.6  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae400e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\NETFLEX3.7  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD

Data: 0xf1500e11  
Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\O100PCI  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x11108d

Value 1  
Name: token  
Type: REG\_SZ  
Data: O100PCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\OCE4XMP  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x13108d

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCE4XMP

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\OCTK16  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x1108d

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCTK16

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\RNSFDDI  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x22001112

Value 1  
Name: token  
Type: REG\_SZ  
Data: RNSFDDI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\RTL8029  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x802910ec

Value 1  
Name: token  
Type: REG\_SZ  
Data: RTL8029

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\SKFPNT  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x40001148

Value 1  
Name: token  
Type: REG\_SZ  
Data: SKFPNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\SKTOKNT\_PCI  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x42001148

Value 1  
Name: token  
Type: REG\_SZ  
Data: SKTOKNT\_PCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\STREAMER  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 8:52 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x181014

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\Parameters  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:58 PM  
Value 0  
Name: ProcessorAffinityMask  
Type: REG\_DWORD  
Data: 0

Key Name: SOFTWARE\Microsoft\MSSQLServer  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:32 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Client  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:32 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Client\ConnectTo  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:32 PM  
Value 0  
Name: DSQUERY  
Type: REG\_SZ  
Data: DBNMPNTW

Key Name: SOFTWARE\Microsoft\MSSQLServer\Client\DB-Lib  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AutoAnsiToOem

Type: REG\_SZ  
Data: ON

Value 1  
Name: UseIntlSettings  
Type: REG\_SZ  
Data: ON

Key Name: SOFTWARE\Microsoft\MSSQLServer\Client\TDS  
Class Name: <NO CLASS>  
Last Write Time: 9/17/99 - 1:56 PM  
Value 0  
Name: <NO NAME>  
Type: REG\_SZ  
Data: 7.0

Value 1  
Name: (local)  
Type: REG\_SZ  
Data: 7.0

Value 2  
Name: .  
Type: REG\_SZ  
Data: 7.0

Value 3  
Name: SPIDER  
Type: REG\_SZ  
Data: 7.0

Key Name: SOFTWARE\Microsoft\MSSQLServer\MSSQLServer  
Class Name: <NO CLASS>  
Last Write Time: 9/20/99 - 11:22 AM

Value 0  
Name: AuditLevel  
Type: REG\_DWORD  
Data: 0

Value 1  
Name: BackupDirectory  
Type: REG\_SZ  
Data: C:\MSSQL7\BACKUP

Value 2  
Name: DefaultCompStyle  
Type: REG\_SZ  
Data: 0

Value 3  
Name: DefaultDomain



```

Type:      REG_SZ
Data:      SPIDER

Value 4
Name:      DefaultLocaleID
Type:      REG_SZ
Data:      8200

Value 5
Name:      DefaultLogin
Type:      REG_SZ
Data:      guest

Value 6
Name:      DefaultSortID
Type:      REG_SZ
Data:      50

Value 7
Name:      ListenOn
Type:      REG_MULTI_SZ
Data:      SSNMPN70,\\.\pipe\sql\query
          SSMSSO70,1433

Value 8
Name:      LoginMode
Type:      REG_DWORD
Data:      0

Value 9
Name:      Map#
Type:      REG_SZ
Data:      -

Value 10
Name:      Map$
Type:      REG_SZ
Data:

Value 11
Name:      Map_
Type:      REG_SZ
Data:      \

Value 12
Name:      ResourceMgrID
Type:      REG_SZ
Data:      {472378E4-6C7E-11D3-A811-00902725C139}

Value 13
Name:      RWSListenAddress
Type:      REG_SZ

```

```

Data:

Value 14
Name:      SetHostName
Type:      REG_DWORD
Data:      0

Value 15
Name:      Tapeloadwaittime
Type:      REG_DWORD
Data:      0xffffffff

Key Name:
SOFTWARE\Microsoft\MicrosoftServer\MSSQLServer\CurrentVersion
Class Name: <NO CLASS>
Last Write Time: 9/16/99 - 11:36 PM
Value 0
Name:      checksum
Type:      REG_BINARY
Data:
00000000 37 35 32 32 63 31 35 38 - 61 65 37 64 34 63 64 37
7522c158ae7d4cd7
00000010 35 30 64 61 30 33 34 62 - 37 64 63 32 30 65 62 62
50da034b7dc20ebb
00000020 39 32 64 33 33 30 38 63 - 38 61 65 37 66 65 65 30
92d3308c8ae7fee0
00000030 63 37 63 62 30 61 61 35 - 35 65 34 34 62 65 62 35
c7cb0aa55e44beb5
00000040 32 66 31 66 33 31 35 66 - 34 62 36 38 39 39 30 64
2f1f315f4b68990d
00000050 30 36 64 64 64 33 62 36 - 38 64 63 30 36 31 31 33
06ddd3b68dc06113
00000060 38 33 37 31 62 34 36 64 - 65 34 36 62 61 65 38 65
8371b46de46bae8e
00000070 31 32 31 63 61 64 30 34 - 35 65 30 36 32 61 62 38
121cad045e062ab8
00000080 64 35 38 65 33 65 63 61 - 61 34 62 30 39 65 39 34
d58e3ecaa4b09e94
00000090 65 32 62 34 31 31 30 31 - 00
e2b41101.

Value 1
Name:      CSDVersion
Type:      REG_SZ
Data:      7.00.805

Value 2
Name:      CSDVersionNumber
Type:      REG_DWORD
Data:      0x100

Value 3
Name:      CurrentVersion

```

Type: REG\_SZ  
Data: 7.00.623

Value 4  
Name: Language  
Type: REG\_DWORD  
Data: 0x409

Value 5  
Name: RegisteredOwner  
Type: REG\_SZ  
Data: TPC-C PerfLab

Value 6  
Name: SerialNumber  
Type: REG\_DWORD  
Data: 0x84120040

Key Name: SOFTWARE\Microsoft\MSSQLServer\MSSQLServer\Parameters  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:32 PM  
Value 0  
Name: SQLArg0  
Type: REG\_SZ  
Data: -dC:\MSSQL7\data\master.mdf

Value 1  
Name: SQLArg1  
Type: REG\_SZ  
Data: -eC:\MSSQL7\log\ERRORLOG

Value 2  
Name: SQLArg2  
Type: REG\_SZ  
Data: -lC:\MSSQL7\data\mastlog.ldf

Key Name: SOFTWARE\Microsoft\MSSQLServer\MSSQLServer\RPCNetLib  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:32 PM  
Value 0  
Name: Security  
Type: REG\_SZ  
Data:

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD

Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\ADSDSOObject  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\DTSPackageDSO  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\Microsoft.Jet.OLEDB.4.0  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSDAORA  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSDASQL  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSIDXS  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0

Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSOLAP  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 11:36 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSQLImpProv  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSSEARCHSQL  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\SQLOLEDB  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication\MergeReplicationProvider  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication\MergeReplicationProvider\7.0  
Class Name: <NO CLASS>

Last Write Time: 9/16/99 - 10:34 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication\MergeReplicationProvider\7.0\MSJet  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 11:34 PM  
Value 0  
Name: <NO NAME>  
Type: REG\_SZ  
Data: {f159cf30-0db4-11d1-b272-00aa00b8de95}

Key Name: SOFTWARE\Microsoft\MSSQLServer\Setup  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:32 PM  
Value 0  
Name: SourcePath  
Type: REG\_SZ  
Data: D:\SQL70\_623

Value 1  
Name: SQLDataRoot  
Type: REG\_SZ  
Data: C:\MSSQL7

Value 2  
Name: SQLPath  
Type: REG\_SZ  
Data: C:\MSSQL7

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQL Service Manager  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM  
Value 0  
Name: Action Verify  
Type: REG\_DWORD  
Data: 0

Value 1  
Name: DefaultSvc  
Type: REG\_SZ  
Data: MSSQLServer

Value 2  
Name: Remote  
Type: REG\_DWORD  
Data: 0x1

Value 3  
Name: Services  
Type: REG\_MULTI\_SZ

Data: MSSQLServer  
SQLServerAgent  
MSDTC

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLLEW  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLLEW\Replication  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM

Value 0  
Name: PerfmonFile  
Type: REG\_SZ  
Data: C:\MSSQL7\BINN\REPLMON.PMC

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLLEW\Wizards  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM

Value 0  
Name: Web Assistant  
Type: REG\_SZ  
Data: C:\MSSQL7\BINN\semwebwz.DLL^WebWizardEntry

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLServerAgent  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM

Value 0  
Name: DownloadedMaxRows  
Type: REG\_DWORD  
Data: 0x64

Value 1  
Name: ErrorLogFile  
Type: REG\_SZ  
Data: C:\MSSQL7\LOG\SQLAGENT.OUT

Value 2  
Name: ErrorLoggingLevel  
Type: REG\_DWORD  
Data: 0x3

Value 3  
Name: JobHistoryMaxRows  
Type: REG\_DWORD  
Data: 0x3e8

Value 4  
Name: JobHistoryMaxRowsPerJob

Type: REG\_DWORD  
Data: 0x64

Value 5  
Name: MSXServerName  
Type: REG\_SZ  
Data:

Value 6  
Name: NonAlertableErrors  
Type: REG\_SZ  
Data: 1204,4002

Value 7  
Name: RestartSQLServer  
Type: REG\_DWORD  
Data: 0x1

Value 8  
Name: ServerHost  
Type: REG\_SZ  
Data:

Value 9  
Name: WorkingDirectory  
Type: REG\_SZ  
Data: C:\MSSQL7\JOBS

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLServerAgent\Subsystems  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM

Value 0  
Name: ActiveScripting  
Type: REG\_SZ  
Data: C:\MSSQL7\BINN\SQLATXSS.DLL,NULL,ActiveScriptStart,ActiveScriptEvent,ActiveScriptStop,10

Value 1  
Name: CmdExec  
Type: REG\_SZ  
Data: C:\MSSQL7\BINN\SQLCMDSS.DLL,NULL,CmdExecStart,CmdEvent,CmdExecStop,10

Value 2  
Name: Distribution  
Type: REG\_SZ  
Data: C:\MSSQL7\BINN\SQLREPSS.DLL,C:\MSSQL7\BINN\DISTRIB.EXE,ReplStart,ReplEvent,ReplStop,100

Value 3  
Name: LogReader  
Type: REG\_SZ  
Data:  
C:\MSSQL7\BINN\SQLREPSS.DLL, C:\MSSQL7\BINN\LOGREAD.EXE, ReplStart, ReplEvent, ReplStop, 25

Value 4  
Name: Merge  
Type: REG\_SZ  
Data:  
C:\MSSQL7\BINN\SQLREPSS.DLL, C:\MSSQL7\BINN\REPLMERG.EXE, ReplStart, ReplEvent, ReplStop, 100

Value 5  
Name: Snapshot  
Type: REG\_SZ  
Data:  
C:\MSSQL7\BINN\SQLREPSS.DLL, C:\MSSQL7\BINN\SNAPSHOT.EXE, ReplStart, ReplEvent, ReplStop, 100

Key Name: SOFTWARE\Microsoft\MSSQLServer\Tracking  
Class Name: <NO CLASS>  
Last Write Time: 9/16/99 - 10:34 PM

Value 0  
Name: {E07FDDA4-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 1  
Name: {E07FDDA5-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 2  
Name: {E07FDDA8-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 3  
Name: {E07FDDA9-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 4  
Name: {E07FDDAA-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 5  
Name: {E07FDDAB-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ

Data:  
Value 6  
Name: {E07FDDAC-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 7  
Name: {E07FDDAD-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 8  
Name: {E07FDDAE-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 9  
Name: {E07FDDAF-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 10  
Name: {E07FDDBE-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 11  
Name: {E07FDDBF-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 12  
Name: {E07FDDC0-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 13  
Name: {E07FDDC8-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Adapter No: 0

Number of Logical Drives : 1

Logical Drive = 0  
Span Depth = 6  
Raid Level = 0,  
Read Ahead = NORMAL  
Stripe Size = 64KB,

```
Status = OPTIMAL
Write Policy = WRITE_THRU,
Direct IO = DIRECT_IO,
Number of Stripes = 8
SPAN Number = 0
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 0
    Target Number = 0
  Device Number = 1
    Channel Number = 0
    Target Number = 1
  Device Number = 2
    Channel Number = 0
    Target Number = 2
  Device Number = 3
    Channel Number = 0
    Target Number = 3
  Device Number = 4
    Channel Number = 0
    Target Number = 4
  Device Number = 5
    Channel Number = 0
    Target Number = 5
  Device Number = 6
    Channel Number = 0
    Target Number = 10
  Device Number = 7
    Channel Number = 0
    Target Number = 11
SPAN Number = 1
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 0
    Target Number = 12
  Device Number = 1
    Channel Number = 0
    Target Number = 13
  Device Number = 2
    Channel Number = 0
    Target Number = 14
  Device Number = 3
    Channel Number = 0
    Target Number = 15
  Device Number = 4
    Channel Number = 1
    Target Number = 0
  Device Number = 5
    Channel Number = 1
    Target Number = 1
  Device Number = 6
```

```
    Channel Number = 1
    Target Number = 2
  Device Number = 7
    Channel Number = 1
    Target Number = 3
SPAN Number = 2
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 1
    Target Number = 4
  Device Number = 1
    Channel Number = 1
    Target Number = 5
  Device Number = 2
    Channel Number = 1
    Target Number = 10
  Device Number = 3
    Channel Number = 1
    Target Number = 11
  Device Number = 4
    Channel Number = 1
    Target Number = 12
  Device Number = 5
    Channel Number = 1
    Target Number = 13
  Device Number = 6
    Channel Number = 1
    Target Number = 14
  Device Number = 7
    Channel Number = 1
    Target Number = 15
SPAN Number = 3
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 2
    Target Number = 0
  Device Number = 1
    Channel Number = 2
    Target Number = 1
  Device Number = 2
    Channel Number = 2
    Target Number = 2
  Device Number = 3
    Channel Number = 2
    Target Number = 3
  Device Number = 4
    Channel Number = 2
    Target Number = 4
  Device Number = 5
    Channel Number = 2
    Target Number = 5
```

```

Device Number = 6
  Channel Number = 2
  Target Number = 10
Device Number = 7
  Channel Number = 2
  Target Number = 11
SPAN Number = 4
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 2
    Target Number = 12
  Device Number = 1
    Channel Number = 2
    Target Number = 13
  Device Number = 2
    Channel Number = 2
    Target Number = 14
  Device Number = 3
    Channel Number = 2
    Target Number = 15
  Device Number = 4
    Channel Number = 3
    Target Number = 0
  Device Number = 5
    Channel Number = 3
    Target Number = 1
  Device Number = 6
    Channel Number = 3
    Target Number = 2
  Device Number = 7
    Channel Number = 3
    Target Number = 3
SPAN Number = 5
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 3
    Target Number = 4
  Device Number = 1
    Channel Number = 3
    Target Number = 5
  Device Number = 2
    Channel Number = 3
    Target Number = 10
  Device Number = 3
    Channel Number = 3
    Target Number = 11
  Device Number = 4
    Channel Number = 3
    Target Number = 12
  Device Number = 5
    Channel Number = 3

```

```

Target Number = 13
Device Number = 6
  Channel Number = 3
  Target Number = 14
Device Number = 7
  Channel Number = 3
  Target Number = 15

(Channel 0, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 14)
  Type = HARDDISK,      Current Status = ONLINE

```

Size 17823744 blocks

(Channel 0, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks



```

(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

Adapter No: 1

Number of Logical Drives : 1

```

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL
  Stripe Size = 64KB,

```

```

Status = OPTIMAL
Write Policy = WRITE_THRU,
Direct IO = DIRECT_IO,
Number of Stripes = 8
SPAN Number = 0
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 0
    Target Number = 0
  Device Number = 1
    Channel Number = 0
    Target Number = 1
  Device Number = 2
    Channel Number = 0
    Target Number = 2
  Device Number = 3
    Channel Number = 0
    Target Number = 3
  Device Number = 4
    Channel Number = 0
    Target Number = 4
  Device Number = 5
    Channel Number = 0
    Target Number = 5
  Device Number = 6
    Channel Number = 0
    Target Number = 10
  Device Number = 7
    Channel Number = 0
    Target Number = 11
SPAN Number = 1
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 0
    Target Number = 12
  Device Number = 1
    Channel Number = 0
    Target Number = 13
  Device Number = 2
    Channel Number = 0
    Target Number = 14
  Device Number = 3
    Channel Number = 0
    Target Number = 15
  Device Number = 4
    Channel Number = 1
    Target Number = 0
  Device Number = 5
    Channel Number = 1
    Target Number = 1
  Device Number = 6

```

```
        Channel Number = 1
        Target Number = 2
    Device Number = 7
        Channel Number = 1
        Target Number = 3
SPAN Number = 2
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
        Channel Number = 1
        Target Number = 4
    Device Number = 1
        Channel Number = 1
        Target Number = 5
    Device Number = 2
        Channel Number = 1
        Target Number = 10
    Device Number = 3
        Channel Number = 1
        Target Number = 11
    Device Number = 4
        Channel Number = 1
        Target Number = 12
    Device Number = 5
        Channel Number = 1
        Target Number = 13
    Device Number = 6
        Channel Number = 1
        Target Number = 14
    Device Number = 7
        Channel Number = 1
        Target Number = 15
SPAN Number = 3
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
        Channel Number = 2
        Target Number = 0
    Device Number = 1
        Channel Number = 2
        Target Number = 1
    Device Number = 2
        Channel Number = 2
        Target Number = 2
    Device Number = 3
        Channel Number = 2
        Target Number = 3
    Device Number = 4
        Channel Number = 2
        Target Number = 4
    Device Number = 5
        Channel Number = 2
        Target Number = 5
```

```
    Device Number = 6
        Channel Number = 2
        Target Number = 10
    Device Number = 7
        Channel Number = 2
        Target Number = 11
SPAN Number = 4
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
        Channel Number = 2
        Target Number = 12
    Device Number = 1
        Channel Number = 2
        Target Number = 13
    Device Number = 2
        Channel Number = 2
        Target Number = 14
    Device Number = 3
        Channel Number = 2
        Target Number = 15
    Device Number = 4
        Channel Number = 3
        Target Number = 0
    Device Number = 5
        Channel Number = 3
        Target Number = 1
    Device Number = 6
        Channel Number = 3
        Target Number = 2
    Device Number = 7
        Channel Number = 3
        Target Number = 3
SPAN Number = 5
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
        Channel Number = 3
        Target Number = 4
    Device Number = 1
        Channel Number = 3
        Target Number = 5
    Device Number = 2
        Channel Number = 3
        Target Number = 10
    Device Number = 3
        Channel Number = 3
        Target Number = 11
    Device Number = 4
        Channel Number = 3
        Target Number = 12
    Device Number = 5
        Channel Number = 3
```

Target Number = 13  
Device Number = 6  
Channel Number = 3  
Target Number = 14  
Device Number = 7  
Channel Number = 3  
Target Number = 15

(Channel 0, ID 0)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 1)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 2)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 3)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 4)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 5)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 10)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 11)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 12)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 13)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 0, ID 14)  
Type = HARDDISK, Current Status = ONLINE

Size 17823744 blocks

(Channel 0, ID 15)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 0)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 1)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 2)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 3)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 4)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 5)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 10)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 11)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 12)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 13)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 14)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

(Channel 1, ID 15)  
Type = HARDDISK, Current Status = ONLINE  
Size 17823744 blocks

```

(Channel 2, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

```

(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

Adapter No: 2

Number of Logical Drives : 1

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL
  Stripe Size = 64KB,

```

```
Status = OPTIMAL
Write Policy = WRITE_THRU,
Direct IO = DIRECT_IO,
Number of Stripes = 8
SPAN Number = 0
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 0
    Target Number = 0
  Device Number = 1
    Channel Number = 0
    Target Number = 1
  Device Number = 2
    Channel Number = 0
    Target Number = 2
  Device Number = 3
    Channel Number = 0
    Target Number = 3
  Device Number = 4
    Channel Number = 0
    Target Number = 4
  Device Number = 5
    Channel Number = 0
    Target Number = 5
  Device Number = 6
    Channel Number = 0
    Target Number = 10
  Device Number = 7
    Channel Number = 0
    Target Number = 11
SPAN Number = 1
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 0
    Target Number = 12
  Device Number = 1
    Channel Number = 0
    Target Number = 13
  Device Number = 2
    Channel Number = 0
    Target Number = 14
  Device Number = 3
    Channel Number = 0
    Target Number = 15
  Device Number = 4
    Channel Number = 1
    Target Number = 0
  Device Number = 5
    Channel Number = 1
    Target Number = 1
  Device Number = 6
```

```
    Channel Number = 1
    Target Number = 2
  Device Number = 7
    Channel Number = 1
    Target Number = 3
SPAN Number = 2
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 1
    Target Number = 4
  Device Number = 1
    Channel Number = 1
    Target Number = 5
  Device Number = 2
    Channel Number = 1
    Target Number = 10
  Device Number = 3
    Channel Number = 1
    Target Number = 11
  Device Number = 4
    Channel Number = 1
    Target Number = 12
  Device Number = 5
    Channel Number = 1
    Target Number = 13
  Device Number = 6
    Channel Number = 1
    Target Number = 14
  Device Number = 7
    Channel Number = 1
    Target Number = 15
SPAN Number = 3
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 2
    Target Number = 0
  Device Number = 1
    Channel Number = 2
    Target Number = 1
  Device Number = 2
    Channel Number = 2
    Target Number = 2
  Device Number = 3
    Channel Number = 2
    Target Number = 3
  Device Number = 4
    Channel Number = 2
    Target Number = 4
  Device Number = 5
    Channel Number = 2
    Target Number = 5
```

```

Device Number = 6
  Channel Number = 2
  Target Number = 10
Device Number = 7
  Channel Number = 2
  Target Number = 11
SPAN Number = 4
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 2
    Target Number = 12
  Device Number = 1
    Channel Number = 2
    Target Number = 13
  Device Number = 2
    Channel Number = 2
    Target Number = 14
  Device Number = 3
    Channel Number = 2
    Target Number = 15
  Device Number = 4
    Channel Number = 3
    Target Number = 0
  Device Number = 5
    Channel Number = 3
    Target Number = 1
  Device Number = 6
    Channel Number = 3
    Target Number = 2
  Device Number = 7
    Channel Number = 3
    Target Number = 3
SPAN Number = 5
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 3
    Target Number = 4
  Device Number = 1
    Channel Number = 3
    Target Number = 5
  Device Number = 2
    Channel Number = 3
    Target Number = 10
  Device Number = 3
    Channel Number = 3
    Target Number = 11
  Device Number = 4
    Channel Number = 3
    Target Number = 12
  Device Number = 5
    Channel Number = 3

```

```

Target Number = 13
Device Number = 6
  Channel Number = 3
  Target Number = 14
Device Number = 7
  Channel Number = 3
  Target Number = 15

(Channel 0, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 14)
  Type = HARDDISK,      Current Status = ONLINE

```

Size 17823744 blocks

(Channel 0, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

```

(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

Adapter No: 3

Number of Logical Drives : 1

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL
  Stripe Size = 64KB,

```

```

Status = OPTIMAL
Write Policy = WRITE_THRU,
Direct IO = DIRECT_IO,
Number of Stripes = 8
SPAN Number = 0
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 0
    Target Number = 0
  Device Number = 1
    Channel Number = 0
    Target Number = 1
  Device Number = 2
    Channel Number = 0
    Target Number = 2
  Device Number = 3
    Channel Number = 0
    Target Number = 3
  Device Number = 4
    Channel Number = 0
    Target Number = 4
  Device Number = 5
    Channel Number = 0
    Target Number = 5
  Device Number = 6
    Channel Number = 0
    Target Number = 10
  Device Number = 7
    Channel Number = 0
    Target Number = 11
SPAN Number = 1
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 0
    Target Number = 12
  Device Number = 1
    Channel Number = 0
    Target Number = 13
  Device Number = 2
    Channel Number = 0
    Target Number = 14
  Device Number = 3
    Channel Number = 0
    Target Number = 15
  Device Number = 4
    Channel Number = 1
    Target Number = 0
  Device Number = 5
    Channel Number = 1
    Target Number = 1
  Device Number = 6

```



```

        Channel Number = 1
        Target Number = 2
    Device Number = 7
        Channel Number = 1
        Target Number = 3
SPAN Number = 2
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
        Channel Number = 1
        Target Number = 4
    Device Number = 1
        Channel Number = 1
        Target Number = 5
    Device Number = 2
        Channel Number = 1
        Target Number = 10
    Device Number = 3
        Channel Number = 1
        Target Number = 11
    Device Number = 4
        Channel Number = 1
        Target Number = 12
    Device Number = 5
        Channel Number = 1
        Target Number = 13
    Device Number = 6
        Channel Number = 1
        Target Number = 14
    Device Number = 7
        Channel Number = 1
        Target Number = 15
SPAN Number = 3
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
        Channel Number = 2
        Target Number = 0
    Device Number = 1
        Channel Number = 2
        Target Number = 1
    Device Number = 2
        Channel Number = 2
        Target Number = 2
    Device Number = 3
        Channel Number = 2
        Target Number = 3
    Device Number = 4
        Channel Number = 2
        Target Number = 4
    Device Number = 5
        Channel Number = 2
        Target Number = 5

```

```

        Device Number = 6
        Channel Number = 2
        Target Number = 10
    Device Number = 7
        Channel Number = 2
        Target Number = 11
SPAN Number = 4
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
        Channel Number = 2
        Target Number = 12
    Device Number = 1
        Channel Number = 2
        Target Number = 13
    Device Number = 2
        Channel Number = 2
        Target Number = 14
    Device Number = 3
        Channel Number = 2
        Target Number = 15
    Device Number = 4
        Channel Number = 3
        Target Number = 0
    Device Number = 5
        Channel Number = 3
        Target Number = 1
    Device Number = 6
        Channel Number = 3
        Target Number = 2
    Device Number = 7
        Channel Number = 3
        Target Number = 3
SPAN Number = 5
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
        Channel Number = 3
        Target Number = 4
    Device Number = 1
        Channel Number = 3
        Target Number = 5
    Device Number = 2
        Channel Number = 3
        Target Number = 10
    Device Number = 3
        Channel Number = 3
        Target Number = 11
    Device Number = 4
        Channel Number = 3
        Target Number = 12
    Device Number = 5
        Channel Number = 3

```

Target Number = 13  
 Device Number = 6  
 Channel Number = 3  
 Target Number = 14  
 Device Number = 7  
 Channel Number = 3  
 Target Number = 15

(Channel 0, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 0, ID 14)  
 Type = HARDDISK, Current Status = ONLINE

Size 17823744 blocks  
  
 (Channel 0, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks  
  
 (Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

```

(Channel 2, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

```

(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

Adapter No: 4

Number of Logical Drives : 1

Logical Drive = 0
  Span Depth = 4
  Raid Level = 1,
  Read Ahead = NORMAL
  Stripe Size = 128KB,

```

```

Status = OPTIMAL
Write Policy = WRITE_THRU,
Direct IO = DIRECT_IO,
Number of Stripes = 2
SPAN Number = 0
  Starting Block = 0
  Number of blocks = 71157760
  Device Number = 0
    Channel Number = 0
    Target Number = 0
  Device Number = 1
    Channel Number = 1
    Target Number = 0
SPAN Number = 1
  Starting Block = 0
  Number of blocks = 71157760
  Device Number = 0
    Channel Number = 0
    Target Number = 1
  Device Number = 1
    Channel Number = 1
    Target Number = 1
SPAN Number = 2
  Starting Block = 0
  Number of blocks = 71157760
  Device Number = 0
    Channel Number = 0
    Target Number = 2
  Device Number = 1
    Channel Number = 1
    Target Number = 2
SPAN Number = 3
  Starting Block = 0
  Number of blocks = 71157760
  Device Number = 0
    Channel Number = 0
    Target Number = 3
  Device Number = 1
    Channel Number = 1
    Target Number = 3

(Channel 0, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 0, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 0, ID 2)

```

```

  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 0, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 1, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 1, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 1, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

(Channel 1, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 71157760 blocks

Adapter No: 5

Number of Logical Drives : 1

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL,
  Stripe Size = 64KB,
  Status = OPTIMAL
  Write Policy = WRITE_THRU,
  Direct IO = DIRECT_IO,
  Number of Stripes = 8
  SPAN Number = 0
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0
      Target Number = 0
    Device Number = 1
      Channel Number = 0
      Target Number = 1
    Device Number = 2
      Channel Number = 0
      Target Number = 2
    Device Number = 3
      Channel Number = 0
      Target Number = 3
    Device Number = 4
      Channel Number = 0

```

```

    Target Number = 4
Device Number = 5
    Channel Number = 0
    Target Number = 5
Device Number = 6
    Channel Number = 0
    Target Number = 10
Device Number = 7
    Channel Number = 0
    Target Number = 11
SPAN Number = 1
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 0
    Target Number = 12
Device Number = 1
    Channel Number = 0
    Target Number = 13
Device Number = 2
    Channel Number = 0
    Target Number = 14
Device Number = 3
    Channel Number = 0
    Target Number = 15
Device Number = 4
    Channel Number = 1
    Target Number = 0
Device Number = 5
    Channel Number = 1
    Target Number = 1
Device Number = 6
    Channel Number = 1
    Target Number = 2
Device Number = 7
    Channel Number = 1
    Target Number = 3
SPAN Number = 2
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 1
    Target Number = 4
Device Number = 1
    Channel Number = 1
    Target Number = 5
Device Number = 2
    Channel Number = 1
    Target Number = 10
Device Number = 3
    Channel Number = 1
    Target Number = 11
Device Number = 4
```

```

    Channel Number = 1
    Target Number = 12
Device Number = 5
    Channel Number = 1
    Target Number = 13
Device Number = 6
    Channel Number = 1
    Target Number = 14
Device Number = 7
    Channel Number = 1
    Target Number = 15
SPAN Number = 3
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 2
    Target Number = 0
Device Number = 1
    Channel Number = 2
    Target Number = 1
Device Number = 2
    Channel Number = 2
    Target Number = 2
Device Number = 3
    Channel Number = 2
    Target Number = 3
Device Number = 4
    Channel Number = 2
    Target Number = 4
Device Number = 5
    Channel Number = 2
    Target Number = 5
Device Number = 6
    Channel Number = 2
    Target Number = 10
Device Number = 7
    Channel Number = 2
    Target Number = 11
SPAN Number = 4
    Starting Block = 0
    Number of blocks = 17823744
Device Number = 0
    Channel Number = 2
    Target Number = 12
Device Number = 1
    Channel Number = 2
    Target Number = 13
Device Number = 2
    Channel Number = 2
    Target Number = 14
Device Number = 3
    Channel Number = 2
    Target Number = 15
```

Device Number = 4 Channel Number = 3 Target Number = 0	Size 17823744 blocks	
Device Number = 5 Channel Number = 3 Target Number = 1	(Channel 0, ID 3) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 6 Channel Number = 3 Target Number = 2	(Channel 0, ID 4) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 7 Channel Number = 3 Target Number = 3	(Channel 0, ID 5) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
SPAN Number = 5 Starting Block = 0 Number of blocks = 17823744		
Device Number = 0 Channel Number = 3 Target Number = 4	(Channel 0, ID 10) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 1 Channel Number = 3 Target Number = 5	(Channel 0, ID 11) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 2 Channel Number = 3 Target Number = 10	(Channel 0, ID 12) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 3 Channel Number = 3 Target Number = 11	(Channel 0, ID 13) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 4 Channel Number = 3 Target Number = 12	(Channel 0, ID 14) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 5 Channel Number = 3 Target Number = 13	(Channel 0, ID 15) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 6 Channel Number = 3 Target Number = 14	(Channel 1, ID 0) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 7 Channel Number = 3 Target Number = 15	(Channel 1, ID 1) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
(Channel 0, ID 0) Type = HARDDISK, Size 17823744 blocks	(Channel 1, ID 2) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
(Channel 0, ID 1) Type = HARDDISK, Size 17823744 blocks	(Channel 1, ID 3) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
(Channel 0, ID 2) Type = HARDDISK, Current Status = ONLINE		

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 10)

```

Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 11)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 12)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 13)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 14)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 15)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

```

Adapter No: 6

Number of Logical Drives : 1

```

Logical Drive = 0
Span Depth = 6
Raid Level = 0,
Read Ahead = NORMAL
Stripe Size = 64KB,
Status = OPTIMAL
Write Policy = WRITE_THRU,
Direct IO = DIRECT_IO,
Number of Stripes = 8
SPAN Number = 0
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
Channel Number = 0
Target Number = 0
Device Number = 1
Channel Number = 0
Target Number = 1
Device Number = 2
Channel Number = 0
Target Number = 2
Device Number = 3
Channel Number = 0
Target Number = 3
Device Number = 4
Channel Number = 0

```

```

Target Number = 4
Device Number = 5
Channel Number = 0
Target Number = 5
Device Number = 6
Channel Number = 0
Target Number = 10
Device Number = 7
Channel Number = 0
Target Number = 11

SPAN Number = 1
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
Channel Number = 0
Target Number = 12
Device Number = 1
Channel Number = 0
Target Number = 13
Device Number = 2
Channel Number = 0
Target Number = 14
Device Number = 3
Channel Number = 0
Target Number = 15
Device Number = 4
Channel Number = 1
Target Number = 0
Device Number = 5
Channel Number = 1
Target Number = 1
Device Number = 6
Channel Number = 1
Target Number = 2
Device Number = 7
Channel Number = 1
Target Number = 3

SPAN Number = 2
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
Channel Number = 1
Target Number = 4
Device Number = 1
Channel Number = 1
Target Number = 5
Device Number = 2
Channel Number = 1
Target Number = 10
Device Number = 3
Channel Number = 1
Target Number = 11
Device Number = 4

```



```

        Channel Number = 1
        Target Number = 12
Device Number = 5
        Channel Number = 1
        Target Number = 13
Device Number = 6
        Channel Number = 1
        Target Number = 14
Device Number = 7
        Channel Number = 1
        Target Number = 15
SPAN Number = 3
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 2
    Target Number = 0
  Device Number = 1
    Channel Number = 2
    Target Number = 1
  Device Number = 2
    Channel Number = 2
    Target Number = 2
  Device Number = 3
    Channel Number = 2
    Target Number = 3
  Device Number = 4
    Channel Number = 2
    Target Number = 4
  Device Number = 5
    Channel Number = 2
    Target Number = 5
  Device Number = 6
    Channel Number = 2
    Target Number = 10
  Device Number = 7
    Channel Number = 2
    Target Number = 11
SPAN Number = 4
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 2
    Target Number = 12
  Device Number = 1
    Channel Number = 2
    Target Number = 13
  Device Number = 2
    Channel Number = 2
    Target Number = 14
  Device Number = 3
    Channel Number = 2
    Target Number = 15

```

```

Device Number = 4
  Channel Number = 3
  Target Number = 0
Device Number = 5
  Channel Number = 3
  Target Number = 1
Device Number = 6
  Channel Number = 3
  Target Number = 2
Device Number = 7
  Channel Number = 3
  Target Number = 3
SPAN Number = 5
  Starting Block = 0
  Number of blocks = 17823744
  Device Number = 0
    Channel Number = 3
    Target Number = 4
  Device Number = 1
    Channel Number = 3
    Target Number = 5
  Device Number = 2
    Channel Number = 3
    Target Number = 10
  Device Number = 3
    Channel Number = 3
    Target Number = 11
  Device Number = 4
    Channel Number = 3
    Target Number = 12
  Device Number = 5
    Channel Number = 3
    Target Number = 13
  Device Number = 6
    Channel Number = 3
    Target Number = 14
  Device Number = 7
    Channel Number = 3
    Target Number = 15

```

```

(Channel 0, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 0, ID 2)
  Type = HARDDISK,      Current Status = ONLINE

```

Size 17823744 blocks

(Channel 0, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

```

(Channel 2, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)

```

```

  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

Adapter No: 7

Number of Logical Drives : 1

Logical Drive = 0
  Span Depth = 6
  Raid Level = 0,
  Read Ahead = NORMAL
  Stripe Size = 64KB,
  Status = OPTIMAL
  Write Policy = WRITE_THRU,
  Direct IO = DIRECT_IO,
  Number of Stripes = 8
  SPAN Number = 0
    Starting Block = 0
    Number of blocks = 17823744
    Device Number = 0
      Channel Number = 0
      Target Number = 0
    Device Number = 1
      Channel Number = 0
      Target Number = 1
    Device Number = 2
      Channel Number = 0
      Target Number = 2
    Device Number = 3
      Channel Number = 0
      Target Number = 3
    Device Number = 4
      Channel Number = 0

```

```

        Target Number = 4
Device Number = 5
        Channel Number = 0
        Target Number = 5
Device Number = 6
        Channel Number = 0
        Target Number = 10
Device Number = 7
        Channel Number = 0
        Target Number = 11
SPAN Number = 1
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 0
        Target Number = 12
Device Number = 1
        Channel Number = 0
        Target Number = 13
Device Number = 2
        Channel Number = 0
        Target Number = 14
Device Number = 3
        Channel Number = 0
        Target Number = 15
Device Number = 4
        Channel Number = 1
        Target Number = 0
Device Number = 5
        Channel Number = 1
        Target Number = 1
Device Number = 6
        Channel Number = 1
        Target Number = 2
Device Number = 7
        Channel Number = 1
        Target Number = 3
SPAN Number = 2
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 1
        Target Number = 4
Device Number = 1
        Channel Number = 1
        Target Number = 5
Device Number = 2
        Channel Number = 1
        Target Number = 10
Device Number = 3
        Channel Number = 1
        Target Number = 11
Device Number = 4

```

```

        Channel Number = 1
        Target Number = 12
Device Number = 5
        Channel Number = 1
        Target Number = 13
Device Number = 6
        Channel Number = 1
        Target Number = 14
Device Number = 7
        Channel Number = 1
        Target Number = 15
SPAN Number = 3
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 0
Device Number = 1
        Channel Number = 2
        Target Number = 1
Device Number = 2
        Channel Number = 2
        Target Number = 2
Device Number = 3
        Channel Number = 2
        Target Number = 3
Device Number = 4
        Channel Number = 2
        Target Number = 4
Device Number = 5
        Channel Number = 2
        Target Number = 5
Device Number = 6
        Channel Number = 2
        Target Number = 10
Device Number = 7
        Channel Number = 2
        Target Number = 11
SPAN Number = 4
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 12
Device Number = 1
        Channel Number = 2
        Target Number = 13
Device Number = 2
        Channel Number = 2
        Target Number = 14
Device Number = 3
        Channel Number = 2
        Target Number = 15

```

Device Number = 4 Channel Number = 3 Target Number = 0	Size 17823744 blocks	
Device Number = 5 Channel Number = 3 Target Number = 1	(Channel 0, ID 3) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 6 Channel Number = 3 Target Number = 2	(Channel 0, ID 4) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 7 Channel Number = 3 Target Number = 3	(Channel 0, ID 5) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
SPAN Number = 5 Starting Block = 0 Number of blocks = 17823744		
Device Number = 0 Channel Number = 3 Target Number = 4	(Channel 0, ID 10) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 1 Channel Number = 3 Target Number = 5	(Channel 0, ID 11) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 2 Channel Number = 3 Target Number = 10	(Channel 0, ID 12) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 3 Channel Number = 3 Target Number = 11	(Channel 0, ID 13) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 4 Channel Number = 3 Target Number = 12	(Channel 0, ID 14) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 5 Channel Number = 3 Target Number = 13	(Channel 0, ID 15) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 6 Channel Number = 3 Target Number = 14	(Channel 1, ID 0) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
Device Number = 7 Channel Number = 3 Target Number = 15	(Channel 1, ID 1) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
(Channel 0, ID 0) Type = HARDDISK, Size 17823744 blocks	(Channel 1, ID 2) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
(Channel 0, ID 1) Type = HARDDISK, Size 17823744 blocks	(Channel 1, ID 3) Type = HARDDISK, Size 17823744 blocks	Current Status = ONLINE
(Channel 0, ID 2) Type = HARDDISK, Current Status = ONLINE		

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 3, ID 10)

```

Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 11)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 12)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 13)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 14)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 3, ID 15)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

```

Adapter No: 8

Number of Logical Drives : 1

```

Logical Drive = 0
Span Depth = 6
Raid Level = 0,
Read Ahead = NORMAL
Stripe Size = 64KB,
Status = OPTIMAL
Write Policy = WRITE_THRU,
Direct IO = DIRECT_IO,
Number of Stripes = 8
SPAN Number = 0
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
Channel Number = 0
Target Number = 0
Device Number = 1
Channel Number = 0
Target Number = 1
Device Number = 2
Channel Number = 0
Target Number = 2
Device Number = 3
Channel Number = 0
Target Number = 3
Device Number = 4
Channel Number = 0

```

```

Target Number = 4
Device Number = 5
Channel Number = 0
Target Number = 5
Device Number = 6
Channel Number = 0
Target Number = 10
Device Number = 7
Channel Number = 0
Target Number = 11

SPAN Number = 1
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
Channel Number = 0
Target Number = 12
Device Number = 1
Channel Number = 0
Target Number = 13
Device Number = 2
Channel Number = 0
Target Number = 14
Device Number = 3
Channel Number = 0
Target Number = 15
Device Number = 4
Channel Number = 1
Target Number = 0
Device Number = 5
Channel Number = 1
Target Number = 1
Device Number = 6
Channel Number = 1
Target Number = 2
Device Number = 7
Channel Number = 1
Target Number = 3

SPAN Number = 2
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
Channel Number = 1
Target Number = 4
Device Number = 1
Channel Number = 1
Target Number = 5
Device Number = 2
Channel Number = 1
Target Number = 10
Device Number = 3
Channel Number = 1
Target Number = 11
Device Number = 4

```

```

        Channel Number = 1
        Target Number = 12
Device Number = 5
        Channel Number = 1
        Target Number = 13
Device Number = 6
        Channel Number = 1
        Target Number = 14
Device Number = 7
        Channel Number = 1
        Target Number = 15
SPAN Number = 3
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 0
Device Number = 1
        Channel Number = 2
        Target Number = 1
Device Number = 2
        Channel Number = 2
        Target Number = 2
Device Number = 3
        Channel Number = 2
        Target Number = 3
Device Number = 4
        Channel Number = 2
        Target Number = 4
Device Number = 5
        Channel Number = 2
        Target Number = 5
Device Number = 6
        Channel Number = 2
        Target Number = 10
Device Number = 7
        Channel Number = 2
        Target Number = 11
SPAN Number = 4
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 2
        Target Number = 12
Device Number = 1
        Channel Number = 2
        Target Number = 13
Device Number = 2
        Channel Number = 2
        Target Number = 14
Device Number = 3
        Channel Number = 2
        Target Number = 15

```

```

Device Number = 4
        Channel Number = 3
        Target Number = 0
Device Number = 5
        Channel Number = 3
        Target Number = 1
Device Number = 6
        Channel Number = 3
        Target Number = 2
Device Number = 7
        Channel Number = 3
        Target Number = 3
SPAN Number = 5
Starting Block = 0
Number of blocks = 17823744
Device Number = 0
        Channel Number = 3
        Target Number = 4
Device Number = 1
        Channel Number = 3
        Target Number = 5
Device Number = 2
        Channel Number = 3
        Target Number = 10
Device Number = 3
        Channel Number = 3
        Target Number = 11
Device Number = 4
        Channel Number = 3
        Target Number = 12
Device Number = 5
        Channel Number = 3
        Target Number = 13
Device Number = 6
        Channel Number = 3
        Target Number = 14
Device Number = 7
        Channel Number = 3
        Target Number = 15

```

```

(Channel 0, ID 0)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 0, ID 1)
Type = HARDDISK,      Current Status = ONLINE
Size 17823744 blocks

(Channel 0, ID 2)
Type = HARDDISK,      Current Status = ONLINE

```



Size 17823744 blocks

(Channel 0, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 0, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 5)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 10)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 11)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 12)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 13)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 14)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 1, ID 15)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 0)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 1)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 2)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 3)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

(Channel 2, ID 4)  
 Type = HARDDISK, Current Status = ONLINE  
 Size 17823744 blocks

```

(Channel 2, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 10)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 2, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 0)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 1)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 2)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 3)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 4)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 5)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 10)

```

```

  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 11)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 12)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 13)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 14)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

(Channel 3, ID 15)
  Type = HARDDISK,      Current Status = ONLINE
  Size 17823744 blocks

```

Disk Array Controller firmware and driver for databases with high workload are available at <http://www.ami.com>.

**This section discloses hardware information and the Windows NT 4.0 Enterprise Edition registry parameters used on the Primergy 170 client systems.**

System Information report written at: 03/19/1999 11:09:21 AM  
[System Summary]

Item	Value
OS Name	Microsoft Windows 2000 Server
Version	5.0.2128 Build 2128
OS Manufacturer	Microsoft Corporation
System Name	GRAU
System Manufacturer	FUJITSU SIEMENS
System Model	Pentium II
System Type	X86-based PC
Processor	x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz
BIOS Version	PhoenixBIOS Version 4.06 Rev. 1.10.1107
Windows Directory	C:\WINNT
System Directory	C:\WINNT\System32
Boot Device	\Device\Harddisk0\Partition1
Locale	United States
User Name	GRAU\Administrator
Time Zone	W. Europe Standard Time

Total Physical Memory 261,668 KB  
Available Physical Memory 137,784 KB  
Total Virtual Memory 895,072 KB  
Available Virtual Memory 659,004 KB  
Page File Space 633,404 KB  
Page File Not Available

System Information report written at: 03/19/1999 11:09:59 AM  
[Hardware Resources]

[ Following are sub-categories of this main category ]

[Conflicts/Sharing]

Resource	Device
IRQ 9	Microsoft ACPI-Compliant System
IRQ 9	Intel 82371AB/EB PCI to USB Universal Host Controller
IRQ 9	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #7
IRQ 9	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #8
IRQ 9	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #5
IRQ 9	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #6
IRQ 9	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter
IRQ 9	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #2
IRQ 9	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #3
IRQ 9	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #4
IRQ 9	Adaptec AHA-2940U2/U2W PCI SCSI Controller

[DMA]

Channel	Device	Status
4	Direct memory access controller	OK
2	Standard floppy disk controller	OK

[Forced Hardware]

Device PNP Device ID  
No Forced Hardware

[I/O]

Address Range	Device	Status
0x0000-0x0CF7	PCI bus	OK
0x0000-0x0CF7	Direct memory access controller	OK
0x0D00-0xFFFF	PCI bus	OK
0x03B0-0x03BB	Intel 82443BX Pentium(r) II Processor to AGP Controller	OK
0x03B0-0x03BB	Matrox Graphics MGA-G100 AGP	OK
0x03C0-0x03DF	Intel 82443BX Pentium(r) II Processor to AGP Controller	OK
0x03C0-0x03DF	Matrox Graphics MGA-G100 AGP	OK
0x0A79-0x0A79	ISAPNP Read Data Port	OK
0x0279-0x0279	ISAPNP Read Data Port	OK
0x0274-0x0277	ISAPNP Read Data Port	OK

0x0010-0x001F	Motherboard resources	OK
0x0022-0x003F	Motherboard resources	OK
0x0050-0x0053	Motherboard resources	OK
0x0062-0x0063	Motherboard resources	OK
0x0065-0x006F	Motherboard resources	OK
0x0074-0x007F	Motherboard resources	OK
0x0090-0x0091	Motherboard resources	OK
0x0093-0x009F	Motherboard resources	OK
0x00A2-0x00B1	Motherboard resources	OK
0x00B4-0x00BF	Motherboard resources	OK
0x00E0-0x00EF	Motherboard resources	OK
0x0072-0x0073	Motherboard resources	OK
0x0370-0x0371	Motherboard resources	OK
0x04D0-0x04D1	Motherboard resources	OK
0xF0B0-0xF0BF	Motherboard resources	OK
0xF0C0-0xF0CF	Motherboard resources	OK
0xF0D0-0xF0FF	Motherboard resources	OK
0x0080-0x008F	Direct memory access controller	OK
0x00C0-0x00DF	Direct memory access controller	OK
0x0020-0x0021	Programmable interrupt controller	OK
0x00A0-0x00A1	Programmable interrupt controller	OK
0x0070-0x0071	System CMOS/real time clock	OK
0x0040-0x0043	System timer	OK
0x00F0-0x00FE	Numeric data processor	OK
0x0061-0x0061	System speaker	OK
0x0060-0x0060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x0064-0x0064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x03F0-0x03F5	Standard floppy disk controller	OK
0x03F7-0x03F7	Standard floppy disk controller	OK
0x0378-0x037B	Printer Port (LPT1)	OK
0x03F8-0x03FF	Communications Port (COM1)	OK
0x02F8-0x02FF	Communications Port (COM2)	OK
0xFCF0-0xFCFF	Intel(r) 82371AB/EB PCI Bus Master IDE Controller	OK
0x01F0-0x01F7	Primary IDE Channel	OK
0x03F6-0x03F6	Primary IDE Channel	OK
0x0170-0x0177	Secondary IDE Channel	OK
0x0376-0x0376	Secondary IDE Channel	OK
0xF800-0xF81F	Intel 82371AB/EB PCI to USB Universal Host Controller	OK
0xE000-0xEFFF	PCI standard PCI-to-PCI bridge	OK
0xE800-0xE8FF	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #7	OK
0xE400-0xE4FF	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #8	OK
0xD000-0xDFFF	PCI standard PCI-to-PCI bridge	OK
0xD800-0xD8FF	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #5	OK
0xD400-0xD4FF	Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #6	OK
0xC000-0xCFFF	PCI standard PCI-to-PCI bridge	OK

```

0xC800-0xC8FF  Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter
                OK
0xC400-0xC4FF  Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter
                #2 OK
0xB000-0xB0FF  PCI standard PCI-to-PCI bridge OK
0xB800-0xB8FF  Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter
                #3 OK
0xB400-0xB4FF  Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter
                #4 OK
0xF400-0xF4FF  Adaptec AHA-2940U2/U2W PCI SCSI Controller OK

```

[IRQs]

```

IRQ Number  Device
9           Microsoft ACPI-Compliant System
9           Intel 82371AB/EB PCI to USB Universal Host Controller
9           Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #7
9           Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #8
9           Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #5
9           Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #6
9           Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter
9           Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #2
9           Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #3
9           Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter #4
9           Adaptec AHA-2940U2/U2W PCI SCSI Controller
8           System CMOS/real time clock
0           System timer
13          Numeric data processor
1           Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
12          PS/2 Compatible Mouse
6           Standard floppy disk controller
4           Communications Port (COM1)
3           Communications Port (COM2)
14          Primary IDE Channel
15          Secondary IDE Channel

```

[Memory]

```

Range Device Status
0xA0000-0xBFFFF PCI bus OK
0xA0000-0xBFFFF Intel 82443BX Pentium(r) II Processor to AGP
Controller OK
0xA0000-0xBFFFF Matrox Graphics MGA-G100 AGP OK
0xC8000-0xDFFFF PCI bus OK
0x10000000-0xFFFFDFFF PCI bus OK
0xFE000000-0xFEFFFFF Intel 82443BX Pentium(r) II Processor to AGP
Controller OK
0xFE000000-0xFEFFFFF Matrox Graphics MGA-G100 AGP OK
0xF6000000-0xF6FFFFF Intel 82443BX Pentium(r) II Processor to AGP
Controller OK
0xF6000000-0xF6FFFFF Matrox Graphics MGA-G100 AGP OK
0xF8000000-0xFBFFFFF Intel 82443BX Pentium(r) II Processor to AGP
Controller OK

```

```

0xFEFC8000-0xFEFCBFFF Matrox Graphics MGA-G100 AGP OK
0xFDE00000-0xFDEFFFFF PCI standard PCI-to-PCI bridge OK
0xFDF00000-0xFDF7FFFF Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet
Adapter #7 OK
0xFDE80000-0xFDEFFFFF Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet
Adapter #8 OK
0xFDC00000-0xFDDFFFFF PCI standard PCI-to-PCI bridge OK
0xFDD00000-0xFDD7FFFF Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet
Adapter #5 OK
0xFDC80000-0xFDCFFFFF Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet
Adapter #6 OK
0xFDA00000-0xFDBFFFFF PCI standard PCI-to-PCI bridge OK
0xFDB00000-0xFDB7FFFF Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet
Adapter OK
0xFDA80000-0xFDAFFFFF Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet
Adapter #2 OK
0xFD800000-0xFD9FFFFF PCI standard PCI-to-PCI bridge OK
0xFD900000-0xFD97FFFF Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet
Adapter #3 OK
0xFD880000-0xFD8FFFFF Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet
Adapter #4 OK
0xFEDFF000-0xFEDFFFFF Adaptec AHA-2940U2/U2W PCI SCSI Controller OK

```

System Information report written at: 03/19/1999 11:11:48 AM  
[Storage]

[ Following are sub-categories of this main category ]

[Drives]

```

Item Value
Drive A:
Description 3 1/2 Inch Floppy Drive

Drive C:
Description Local Fixed Disk
Compressed False
File System NTFS
Size 4.23 GB (4,540,321,792 bytes)
Free Space 3.15 GB (3,381,616,640 bytes)
Volume Name
Volume Serial Number 2C01718B
Partition Disk #0, Partition #0
Partition Size 4.23 GB (4,540,322,304 bytes)
Starting Offset 32256 bytes
Drive Description Disk drive
Drive Manufacturer (Standard disk drives)
Drive Model FUJITSU MAB3045SC SCSI Disk Device
Drive BytesPerSector 512
Drive MediaLoaded True
Drive MediaType Fixed hard disk media
Drive Partitions 1
Drive SCSIbus 0

```

Drive SCSILogicalUnit 0  
Drive SCSIPort 2  
Drive SCISITargetId 0  
Drive SectorsPerTrack 63  
Drive Size 4548579840 bytes  
Drive TotalCylinders 553  
Drive TotalSectors 8883945  
Drive TotalTracks 141015  
Drive TracksPerCylinder 255

[SCSI]

Item Value  
Name Adaptec AHA-2940U2/U2W PCI SCSI Controller  
Caption Adaptec AHA-2940U2/U2W PCI SCSI Controller  
Driver aic78u2  
Status OK  
PNP Device ID  
PCI\VEN\_9005&DEV\_0010&SUBSYS\_A1809005&REV\_00\3&61AAA01&0&90  
Device ID  
PCI\VEN\_9005&DEV\_0010&SUBSYS\_A1809005&REV\_00\3&61AAA01&0&90  
Device Map Not Available  
Index Not Available  
Max Number Controlled Not Available  
IRQ Number 9  
I/O Port 0xF400-0xF4FF  
Driver 63.17 KB (64,688 bytes)

System Information report written at: 03/19/1999 11:10:51 AM  
[Adapter]

Item Value  
Name [000] Intel 8255x-based PCI Ethernet Adapter (10/100)  
Adapter Type Intel 8255x-based PCI Ethernet Adapter (10/100)  
Product Name Intel 8255x-based PCI Ethernet Adapter (10/100)  
Installed True  
PNP Device ID Not Available  
Last Reset 3/19/1999 10:39:21 AM  
Index 0  
Service Name E100B  
IP Address 0.0.0.0  
IP Subnet 255.0.0.0  
Default IP Gateway  
DHCP Enabled True  
DHCP Server  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address Not Available  
Service Name Not Available

Name [001] RAS Async Adapter

Adapter Type RAS Async Adapter  
Product Name RAS Async Adapter  
Installed True  
PNP Device ID Not Available  
Last Reset 3/19/1999 10:39:21 AM  
Index 1  
Service Name AsyncMac  
IP Address Not Available  
IP Subnet Not Available  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address Not Available  
Service Name Not Available

Name [002] WAN Miniport (L2TP)  
Adapter Type WAN Miniport (L2TP)  
Product Name WAN Miniport (L2TP)  
Installed True  
PNP Device ID ROOT\MS\_L2TPMINIPORT\0000  
Last Reset 3/19/1999 10:39:21 AM  
Index 2  
Service Name Rasl2tp  
IP Address Not Available  
IP Subnet Not Available  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address Not Available  
Service Name Rasl2tp  
Driver 48.11 KB (49,264 bytes)

Name [003] WAN Miniport (PPTP)  
Adapter Type Wide Area Network (WAN)  
Product Name WAN Miniport (PPTP)  
Installed True  
PNP Device ID ROOT\MS\_PPTPMINIPORT\0000  
Last Reset 3/19/1999 10:39:21 AM  
Index 3  
Service Name PptpMiniport  
IP Address Not Available  
IP Subnet Not Available  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address Not Available  
Service Name PptpMiniport

Driver 44.58 KB (45,648 bytes)

Name [004] Direct Parallel  
Adapter Type Direct Parallel  
Product Name Direct Parallel  
Installed True  
PNP Device ID ROOT\MS\_PTMINIPORT\0000  
Last Reset 3/19/1999 10:39:21 AM  
Index 4  
Service Name Raspti  
IP Address Not Available  
IP Subnet Not Available  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address Not Available  
Service Name Raspti  
Driver 16.48 KB (16,880 bytes)

Name [005] WAN Miniport (IP)  
Adapter Type WAN Miniport (IP)  
Product Name WAN Miniport (IP)  
Installed True  
PNP Device ID ROOT\MS\_NDISWANIP\0000  
Last Reset 3/19/1999 10:39:21 AM  
Index 5  
Service Name NdisWan  
IP Address 0.0.0.0  
IP Subnet 0.0.0.0  
Default IP Gateway  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address Not Available  
Service Name NdisWan  
Driver 86.92 KB (89,008 bytes)

Name [006] Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Adapter Type Ethernet 802.3  
Product Name Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Installed True  
PNP Device ID  
PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&171F2C55&0&2070  
Last Reset 3/19/1999 10:39:21 AM  
Index 6  
Service Name ADPTSF  
IP Address 129.103.181.124  
IP Subnet 255.255.255.0  
Default IP Gateway Not Available  
DHCP Enabled False

DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:00:D1:D9:90:45  
Service Name ADPTSF  
IRQ Number 9  
I/O Port 0xC800-0xC8FF  
Driver 35.52 KB (36,368 bytes)

Name [007] Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Adapter Type Ethernet 802.3  
Product Name Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Installed True  
PNP Device ID  
PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&171F2C55&0&2870  
Last Reset 3/19/1999 10:39:21 AM  
Index 7  
Service Name ADPTSF  
IP Address 129.103.140.2  
IP Subnet 255.255.255.0  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:00:D1:D9:90:46  
Service Name ADPTSF  
IRQ Number 9  
I/O Port 0xC400-0xC4FF  
Driver 35.52 KB (36,368 bytes)

Name [008] Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Adapter Type Ethernet 802.3  
Product Name Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Installed True  
PNP Device ID  
PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&2681C776&0&2080  
Last Reset 3/19/1999 10:39:21 AM  
Index 8  
Service Name ADPTSF  
IP Address 129.103.141.2  
IP Subnet 255.255.255.0  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:00:D1:D9:90:87  
Service Name ADPTSF  
IRQ Number 9  
I/O Port 0xB800-0xB8FF  
Driver 35.52 KB (36,368 bytes)

Name [009] Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Adapter Type Ethernet 802.3  
Product Name Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Installed True  
PNP Device ID PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&2681C776&0&2880  
Last Reset 3/19/1999 10:39:21 AM  
Index 9  
Service Name ADPTSF  
IP Address 129.103.142.2  
IP Subnet 255.255.255.0  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:00:D1:D9:90:88  
Service Name ADPTSF  
IRQ Number 9  
I/O Port 0xB400-0xB4FF  
Driver 35.52 KB (36,368 bytes)

Name [010] Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Adapter Type Ethernet 802.3  
Product Name Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Installed True  
PNP Device ID PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&7907E35&0&2060  
Last Reset 3/19/1999 10:39:21 AM  
Index 10  
Service Name ADPTSF  
IP Address 129.103.143.2  
IP Subnet 255.255.255.0  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:00:D1:D9:91:3D  
Service Name ADPTSF  
IRQ Number 9  
I/O Port 0xD800-0xD8FF  
Driver 35.52 KB (36,368 bytes)

Name [011] Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Adapter Type Ethernet 802.3  
Product Name Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Installed True  
PNP Device ID PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&7907E35&0&2860  
Last Reset 3/19/1999 10:39:21 AM  
Index 11  
Service Name ADPTSF

IP Address 129.103.144.2  
IP Subnet 255.255.255.0  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:00:D1:D9:91:3E  
Service Name ADPTSF  
IRQ Number 9  
I/O Port 0xD400-0xD4FF  
Driver 35.52 KB (36,368 bytes)

Name [012] Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Adapter Type Ethernet 802.3  
Product Name Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Installed True  
PNP Device ID PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&7FE2FEB&0&2050  
Last Reset 3/19/1999 10:39:21 AM  
Index 12  
Service Name ADPTSF  
IP Address 129.103.145.2  
IP Subnet 255.255.255.0  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:00:D1:D9:90:1D  
Service Name ADPTSF  
IRQ Number 9  
I/O Port 0xE800-0xE8FF  
Driver 35.52 KB (36,368 bytes)

Name [013] Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Adapter Type Ethernet 802.3  
Product Name Adaptec ANA62022 64-bit 2 port PCI Fast Ethernet Adapter  
Installed True  
PNP Device ID PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&7FE2FEB&0&2850  
Last Reset 3/19/1999 10:39:21 AM  
Index 13  
Service Name ADPTSF  
IP Address 129.103.146.2  
IP Subnet 255.255.255.0  
Default IP Gateway Not Available  
DHCP Enabled False  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:00:D1:D9:90:1E  
Service Name ADPTSF

IRQ Number 9  
I/O Port 0xE400-0xE4FF  
Driver 35.52 KB (36,368 bytes)

System Information report written at: 03/19/1999 11:09:21 AM  
[System Summary]

Item Value  
OS Name Microsoft Windows 2000 Server  
Version 5.0.2128 Build 2128  
OS Manufacturer Microsoft Corporation  
System Name GRAU  
System Manufacturer FUJITSU SIEMENS  
System Model Pentium II  
System Type X86-based PC  
Processor x86 Family 6 Model 7 Stepping 3 GenuineIntel ~550 Mhz  
BIOS Version PhoenixBIOS Version 4.06 Rev. 1.10.1107  
Windows Directory C:\WINNT  
System Directory C:\WINNT\System32  
Boot Device \Device\Harddisk0\Partition1  
Locale United States  
User Name GRAU\Administrator  
Time Zone W. Europe Standard Time  
Total Physical Memory 261,668 KB  
Available Physical Memory 137,784 KB  
Total Virtual Memory 895,072 KB  
Available Virtual Memory 659,004 KB  
Page File Space 633,404 KB  
Page File Not Available

System Information report written at: 03/19/1999 11:13:47 AM  
[Summary]

Item Value  
Version 5.00.2919.3800  
Build 52919.3800  
Product ID 50293-270-9719691-10022  
Application Path C:\Program Files\Internet Explorer  
Language English (United States)  
Active Printer Not Available

Cipher Strength 56-bit  
Content Advisor Disabled  
IEAK Install No

System Information report written at: 03/19/1999 11:12:34 AM  
[Environment Variables]

Variable Value User Name  
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>

Os2LibPath %SystemRoot%\system32\os2\dll; <SYSTEM>  
Path %SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;C:\MSSQL7\BINN <SYSTEM>  
windir %SystemRoot% <SYSTEM>  
OS Windows\_NT <SYSTEM>  
PROCESSOR\_ARCHITECTURE x86 <SYSTEM>  
PROCESSOR\_LEVEL 6 <SYSTEM>  
PROCESSOR\_IDENTIFIER x86 Family 6 Model 7 Stepping 3, GenuineIntel <SYSTEM>  
PROCESSOR\_REVISION 0703 <SYSTEM>  
NUMBER\_OF\_PROCESSORS 1 <SYSTEM>  
PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH <SYSTEM>  
TEMP %SystemRoot%\TEMP <SYSTEM>  
TMP %SystemRoot%\TEMP <SYSTEM>  
TEMP %USERPROFILE%\Local Settings\Temp GRAU\Administrator  
TMP %USERPROFILE%\Local Settings\Temp GRAU\Administrator

System Information report written at: 03/19/1999 11:12:57 AM  
[Services]

Display Name	Name	State	Start Mode	Service Type	Path	Error
Control	Start Name	Tag ID				
Alerter	Alerter	Stopped	Demand Start	Share Process		
	c:\winnt\system32\services.exe	Normal	LocalSystem	0		
Application Management	AppMgmt	Stopped	Demand Start	Share Process		
	c:\winnt\system32\services.exe	Normal	LocalSystem	0		
Computer Browser	Browser	Stopped	Demand Start	Share Process		
	c:\winnt\system32\services.exe	Normal	LocalSystem	0		
Indexing Service	cisvc	Stopped	Demand Start	Share Process		
	c:\winnt\system32\cisvc.exe	Normal	LocalSystem	0		
ClipBook	ClipSrv	Stopped	Demand Start	Own Process		
	c:\winnt\system32\clipsrv.exe	Normal	LocalSystem	0		
Distributed File System	Dfs	Stopped	Demand Start	Own Process		
	c:\winnt\system32\dfssvc.exe	Normal	LocalSystem	0		
DHCP Client	Dhcp	Stopped	Demand Start	Share Process		
	c:\winnt\system32\services.exe	Normal	LocalSystem	0		
Logical Disk Manager	Administrative Service	dmadmin	Stopped	Demand Start		
	Share Process	c:\winnt\system32\dmadmin.exe	/com	Normal	LocalSystem	0
Logical Disk Manager	dmserver	Stopped	Demand Start	Share Process		
	c:\winnt\system32\services.exe	Normal	LocalSystem	0		
DNS Client	Dnscache	Stopped	Demand Start	Share Process		
	c:\winnt\system32\services.exe	Normal	LocalSystem	0		
Event Log	Eventlog	Running	Auto Start	Share Process		
	c:\winnt\system32\services.exe	Normal	LocalSystem	0		
COM+ Event System	EventSystem	Running	Demand Start	Share Process		
	c:\winnt\system32\svchost.exe	-k netsvcs	Normal	LocalSystem	0	
Fax Service	Fax	Stopped	Disabled	Own Process		
	c:\winnt\system32\faxsvc.exe	Normal	LocalSystem	0		



```

IIS Admin Service      IISADMIN      Running Auto Start   Share Process
c:\winnt\system32\inet\inetinfo.exe Normal LocalSystem 0
IMDB Server           ImdbServer     Stopped Disabled     Own Process
c:\winnt\system32\imdb\imdbsrv.exe Normal LocalSystem 0
Intersite Messaging   IsmServ        Stopped Disabled     Own Process
c:\winnt\system32\ism\ismserv.exe Normal LocalSystem 0
Kerberos Key Distribution Center kdc           Stopped Disabled     Share
Process c:\winnt\system32\lsass.exe Normal LocalSystem 0
Server lanmanserver Running Auto Start   Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
Workstation lanmanworkstation Running Auto Start   Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
License Logging Service LicenseService Stopped Demand Start Own
Process c:\winnt\system32\llssrv.exe Normal LocalSystem 0
TCP/IP NetBIOS Helper Service LmHosts Running Auto Start   Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
Messenger Messenger      Running Auto Start   Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrv Stopped Demand Start Own
Process c:\winnt\system32\mnmsrv.exe Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC Running Demand Start Own
Process c:\winnt\system32\msdtc.exe Normal LocalSystem 0
Windows Installer MSIserver Stopped Demand Start Share Process
c:\winnt\system32\msiexec.exe /v Normal LocalSystem 0
Message Queuing MSMQ Stopped Disabled Own Process
c:\winnt\system32\mqsvc.exe Normal LocalSystem 0
Network DDE NetDDE Stopped Demand Start Share Process
c:\winnt\system32\netdde.exe Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped Demand Start Share Process
c:\winnt\system32\netdde.exe Normal LocalSystem 0
Net Logon Netlogon Stopped Demand Start Share Process
c:\winnt\system32\lsass.exe Normal LocalSystem 0
Network Connections Netman Running Demand Start Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem 0
File Replication NtFrs Stopped Demand Start Own Process
c:\winnt\system32\ntfrs.exe Ignore LocalSystem 0
NT LM Security Support Provider NtLmSsp Stopped Demand Start Share
Process c:\winnt\system32\lsass.exe Normal LocalSystem 0
Removable Storage NtmsSvc Stopped Demand Start Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem 0
Plug and Play PlugPlay Running Auto Start   Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
IPSEC Policy Agent PolicyAgent Stopped Demand Start Share Process
c:\winnt\system32\lsass.exe Normal LocalSystem 0
Protected Storage ProtectedStorage Running Auto Start   Share
Process c:\winnt\system32\services.exe Normal LocalSystem 0
Remote Access Auto Connection Manager RasAuto Stopped Demand Start Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem 0

```

```

Remote Access Connection Manager RasMan Stopped Demand Start Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem 0
Routing and Remote Access RemoteAccess Stopped Disabled Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem 0
Remote Registry Service RemoteRegistry Stopped Disabled Own
Process c:\winnt\system32\regsvc.exe Normal LocalSystem 0
Remote Procedure Call (RPC) Locator RpcLocator Stopped Demand Start
Own Process c:\winnt\system32\locator.exe Normal LocalSystem 0
Remote Procedure Call (RPC) RpcSs Running Auto Start   Share Process
c:\winnt\system32\svchost -k rpcss Normal LocalSystem 0
QoS RSVP RSVP Running Demand Start Own Process
c:\winnt\system32\rsvp.exe -s Normal LocalSystem 0
Security Accounts Manager SamSs Running Auto Start   Share Process
c:\winnt\system32\lsass.exe Normal LocalSystem 0
Smart Card Helper SCardDrv Stopped Demand Start Share Process
c:\winnt\system32\scardsvr.exe Ignore LocalSystem 0
Smart Card SCardSvr Stopped Demand Start Share Process
c:\winnt\system32\scardsvr.exe Ignore LocalSystem 0
Task Scheduler Schedule Running Auto Start   Share Process
c:\winnt\system32\mstask.exe Normal LocalSystem 0
RunAs Service seclogon Stopped Demand Start Share Process
c:\winnt\system32\services.exe Ignore LocalSystem 0
System Event Notification SENS Running Auto Start   Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem 0
Internet Connection Sharing SharedAccess Stopped Demand Start Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem 0
Simple Mail Transport Protocol (SMTP) SMTPSVC Stopped Demand Start Share
Process c:\winnt\system32\inet\inetinfo.exe Normal LocalSystem 0
Print Spooler Spooler Stopped Disabled Own Process
c:\winnt\system32\spoolsv.exe Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped Demand Start Own
Process c:\winnt\system32\smlogsvc.exe Normal LocalSystem 0
Telephony TapiSrv Stopped Disabled Share Process
c:\winnt\system32\svchost.exe -k tapisrv Normal LocalSystem 0
Terminal Services TermService Stopped Disabled Own Process
c:\winnt\system32\termsrv.exe Normal LocalSystem 0
Telnet TlntSvr Stopped Demand Start Own Process
c:\winnt\system32\tlntsvr.exe Normal LocalSystem 0
Distributed Link Tracking Server TrkSvr Stopped Demand Start Share
Process c:\winnt\system32\services.exe Normal LocalSystem 0
Distributed Link Tracking Client TrkWks Stopped Demand Start Share
Process c:\winnt\system32\services.exe Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped Demand Start Own Process
c:\winnt\system32\ups.exe Normal LocalSystem 0
Utility Manager UtilMan Stopped Demand Start Own Process
c:\winnt\system32\utilman.exe Normal LocalSystem 0

```

```

Windows Time W32Time Stopped Demand Start Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
World Wide Web Publishing Service W3SVC Running Auto Start Share
Process c:\winnt\system32\inet_srv\inetinfo.exe Normal LocalSystem
0
Windows Management Instrumentation WinMgmt Running Demand Start Own
Process c:\winnt\system32\wbem\winmgmt.exe Ignore LocalSystem 0
Windows Management Instrumentation Driver Extensions Wmi Running Demand
Start Share Process c:\winnt\system32\services.exe Normal
LocalSystem 0

```

System Information report written at: 03/19/1999 11:12:57 AM  
[Services]

Display Name	Name	State	Start Mode	Service Type	Path	Error
Control Start	Name Tag ID					
Alerter	Alerter	Stopped Demand	Start	Share Process		
	c:\winnt\system32\services.exe			Normal LocalSystem		0
Application Management	AppMgmt	Stopped Demand	Start	Share Process		
	c:\winnt\system32\services.exe			Normal LocalSystem		0
Computer Browser	Browser	Stopped Demand	Start	Share Process		
	c:\winnt\system32\services.exe			Normal LocalSystem		0
Indexing Service	cisvc	Stopped Demand	Start	Share Process		
	c:\winnt\system32\cisvc.exe			Normal LocalSystem		0
ClipBook	ClipSrv	Stopped Demand	Start	Own Process		
	c:\winnt\system32\clipsrv.exe			Normal LocalSystem		0
Distributed File System	Dfs	Stopped Demand	Start	Own Process		
	c:\winnt\system32\dfssvc.exe			Normal LocalSystem		0
DHCP Client	Dhcp	Stopped Demand	Start	Share Process		
	c:\winnt\system32\services.exe			Normal LocalSystem		0
Logical Disk Manager	Administrative Service	Stopped Demand	Start	Share Process		
	Share Process c:\winnt\system32\dmadmin.exe			/com Normal LocalSystem		0
Logical Disk Manager	dmserver	Stopped Demand	Start	Share Process		
	c:\winnt\system32\services.exe			Normal LocalSystem		0
DNS Client	Dnscache	Stopped Demand	Start	Share Process		
	c:\winnt\system32\services.exe			Normal LocalSystem		0
Event Log	Eventlog	Running Auto	Start	Share Process		
	c:\winnt\system32\services.exe			Normal LocalSystem		0
COM+ Event System	EventSystem	Running Demand	Start	Share Process		
	c:\winnt\system32\svchost.exe -k netsvcs			Normal LocalSystem		0
Fax Service	Fax	Stopped Disabled		Own Process		
	c:\winnt\system32\faxsvc.exe			Normal LocalSystem		0
IIS Admin Service	IISADMIN	Running Auto	Start	Share Process		
	c:\winnt\system32\inet_srv\inetinfo.exe			Normal LocalSystem		0
IMDB Server	ImdbServer	Stopped Disabled		Own Process		
	c:\winnt\system32\imdbsrv.exe			Normal LocalSystem		0
Intersite Messaging	IsmServ	Stopped Disabled		Own Process		
	c:\winnt\system32\ismserv.exe			Normal LocalSystem		0
Kerberos Key Distribution Center	kdc	Stopped Disabled		Share Process		
	c:\winnt\system32\lsass.exe			Normal LocalSystem		0

```

Server lanmanserver Running Auto Start Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
Workstation lanmanworkstation Running Auto Start Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
License Logging Service LicenseService Stopped Demand Start Own
Process c:\winnt\system32\llssrv.exe Normal LocalSystem 0
TCP/IP NetBIOS Helper Service LmHosts Running Auto Start Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
Messenger Messenger Running Auto Start Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvc Stopped Demand Start Own
Process c:\winnt\system32\mnmsrvc.exe Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC Running Demand Start Own
Process c:\winnt\system32\msdtc.exe Normal LocalSystem 0
Windows Installer MSIServer Stopped Demand Start Share Process
c:\winnt\system32\msiexec.exe /v Normal LocalSystem 0
Message Queuing MSMQ Stopped Disabled Own Process
c:\winnt\system32\mqsvc.exe Normal LocalSystem 0
Network DDE NetDDE Stopped Demand Start Share Process
c:\winnt\system32\netdde.exe Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped Demand Start Share Process
c:\winnt\system32\netdde.exe Normal LocalSystem 0
Net Logon Netlogon Stopped Demand Start Share Process
c:\winnt\system32\lsass.exe Normal LocalSystem 0
Network Connections Netman Running Demand Start Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem
0
File Replication NtFrs Stopped Demand Start Own Process
c:\winnt\system32\ntfrs.exe Ignore LocalSystem 0
NT LM Security Support Provider NtLmSsp Stopped Demand Start Share
Process c:\winnt\system32\lsass.exe Normal LocalSystem 0
Removable Storage NtmsSvc Stopped Demand Start Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem
0
Plug and Play PlugPlay Running Auto Start Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
IPSEC Policy Agent PolicyAgent Stopped Demand Start Share Process
c:\winnt\system32\lsass.exe Normal LocalSystem 0
Protected Storage ProtectedStorage Running Auto Start Share
Process c:\winnt\system32\services.exe Normal LocalSystem 0
Remote Access Auto Connection Manager RasAuto Stopped Demand Start Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem
0
Remote Access Connection Manager RasMan Stopped Demand Start Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem
0
Routing and Remote Access RemoteAccess Stopped Disabled Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem
0
Remote Registry Service RemoteRegistry Stopped Disabled Own
Process c:\winnt\system32\regsvc.exe Normal LocalSystem 0

```

```

Remote Procedure Call (RPC) Locator RpcLocator Stopped Demand Start
Own Process c:\winnt\system32\locator.exe Normal LocalSystem
0
Remote Procedure Call (RPC) RpcSs Running Auto Start Share Process
c:\winnt\system32\svchost -k rpcss Normal LocalSystem 0
QoS RSVP RSVP Running Demand Start Own Process
c:\winnt\system32\rsvp.exe -s Normal LocalSystem 0
Security Accounts Manager SamSs Running Auto Start Share Process
c:\winnt\system32\lsass.exe Normal LocalSystem 0
Smart Card Helper SCardDrv Stopped Demand Start Share Process
c:\winnt\system32\scardsvr.exe Ignore LocalSystem 0
Smart Card SCardSvr Stopped Demand Start Share Process
c:\winnt\system32\scardsvr.exe Ignore LocalSystem 0
Task Scheduler Schedule Running Auto Start Share Process
c:\winnt\system32\mstask.exe Normal LocalSystem 0
RunAs Service seclogon Stopped Demand Start Share Process
c:\winnt\system32\services.exe Ignore LocalSystem 0
System Event Notification SENS Running Auto Start Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem
0
Internet Connection Sharing SharedAccess Stopped Demand Start Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal LocalSystem
0
Simple Mail Transport Protocol (SMTP) SMTPSVC Stopped Demand Start Share
Process c:\winnt\system32\inetssrv\inetinfo.exe Normal LocalSystem
0
Print Spooler Spooler Stopped Disabled Own Process
c:\winnt\system32\spoolsv.exe Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped Demand Start Own
Process c:\winnt\system32\smlogsvc.exe Normal LocalSystem 0
Telephony Tapisrv Stopped Disabled Share Process
c:\winnt\system32\svchost.exe -k tapisrv Normal LocalSystem
0
Terminal Services TermService Stopped Disabled Own Process
c:\winnt\system32\termsrv.exe Normal LocalSystem 0
Telnet TlntSvr Stopped Demand Start Own Process
c:\winnt\system32\tlntsvr.exe Normal LocalSystem 0
Distributed Link Tracking Server TrkSvr Stopped Demand Start Share
Process c:\winnt\system32\services.exe Normal LocalSystem 0
Distributed Link Tracking Client TrkWks Stopped Demand Start Share
Process c:\winnt\system32\services.exe Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped Demand Start Own Process
c:\winnt\system32\ups.exe Normal LocalSystem 0
Utility Manager UtilMan Stopped Demand Start Own Process
c:\winnt\system32\utilman.exe Normal LocalSystem 0
Windows Time W32Time Stopped Demand Start Share Process
c:\winnt\system32\services.exe Normal LocalSystem 0
World Wide Web Publishing Service W3SVC Running Auto Start Share
Process c:\winnt\system32\inetssrv\inetinfo.exe Normal LocalSystem
0
Windows Management Instrumentation WinMgmt Running Demand Start Own
Process c:\winnt\system32\wbem\winmgmt.exe Ignore LocalSystem 0

```

```

Windows Management Instrumentation Driver Extensions Wmi Running Demand
Start Share Process c:\winnt\system32\services.exe Normal
LocalSystem 0

```

System Information report written at: 03/19/1999 11:11:18 AM  
[Protocol]

```

Item Value
Name MSAFD Tcpip [TCP/IP]
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 16 bytes
MaximumMessageSize 0 bytes
MessageOriented False
MinimumAddressSize 16 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData True
SupportsFragmentation Not Available
SupportsGracefulClosing True
SupportsGuaranteedBandwidth False
SupportsMulticasting False

```

```

Name MSAFD Tcpip [UDP/IP]
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 16 bytes
MaximumMessageSize 65467 bytes
MessageOriented True
MinimumAddressSize 16 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsFragmentation Not Available
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting True

```

```

Name RSVP UDP Service Provider
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 16 bytes
MaximumMessageSize 65467 bytes
MessageOriented True

```

MinimumAddressSize 16 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption True  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting True

Name RSVP TCP Service Provider  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 16 bytes  
MaximumMessageSize 0 bytes  
MessageOriented False  
MinimumAddressSize 16 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption True  
SupportsExpeditedData True  
SupportsFragmentation Not Available  
SupportsGracefulClosing True  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{8C0E0FA5-A0E9-44B8-9574-56CB00B61622}] SEQUENCE 10  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{8C0E0FA5-A0E9-44B8-9574-56CB00B61622}] DATAGRAM 10

ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{7629D0B4-AE77-42EF-AA30-02FE94958788}] SEQUENCE 9  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{7629D0B4-AE77-42EF-AA30-02FE94958788}] DATAGRAM 9  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False

SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{22952CD6-289C-4091-AD4A-EE1380D61F22}] SEQPACKET 8  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{22952CD6-289C-4091-AD4A-EE1380D61F22}] DATAGRAM 8  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{AED5412A-08F2-459B-BC77-DD710DC51898}] SEQPACKET 7  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True

MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{AED5412A-08F2-459B-BC77-DD710DC51898}] DATAGRAM 7  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{AD95CD3F-D209-4F78-8AD3-167D84FE9B25}] SEQPACKET 6  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{AD95CD3F-D209-4F78-8AD3-167D84FE9B25}] DATAGRAM 6  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{FAEE3419-626D-4AB7-828D-EE0929036888}] SEQPACKET 5  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{FAEE3419-626D-4AB7-828D-EE0929036888}] DATAGRAM 5  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False

SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{83865ADC-A313-40AE-8435-69B3878E6994}] SEQPACKET 4  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{83865ADC-A313-40AE-8435-69B3878E6994}] DATAGRAM 4  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{9539A88F-6D41-446C-91D7-3E5A18407CA6}] SEQPACKET 3  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes

MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{9539A88F-6D41-446C-91D7-3E5A18407CA6}] DATAGRAM 3  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{24BF2DA1-6F4A-4EF8-82F7-2C8DB7817F52}] SEQPACKET 0  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{24BF2DA1-6F4A-4EF8-82F7-2C8DB7817F52}] DATAGRAM 0  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{43107499-2A1C-4CD0-ACA2-0A98B1575075}] SEQPACKET 1  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{43107499-2A1C-4CD0-ACA2-0A98B1575075}] DATAGRAM 1  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False

SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{3CBACB77-DB9E-4FBC-AF47-B6534495A056}] SEQUENCEPACKET 2  
ConnectionlessService False  
GuaranteesDelivery True  
GuaranteesSequencing True  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting False  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Name MSAFD NetBIOS [\Device\NetBT\_Tcpip\_{3CBACB77-DB9E-4FBC-AF47-B6534495A056}] DATAGRAM 2  
ConnectionlessService True  
GuaranteesDelivery False  
GuaranteesSequencing False  
MaximumAddressSize 20 bytes  
MaximumMessageSize 64000 bytes  
MessageOriented True  
MinimumAddressSize 20 bytes  
PseudoStreamOriented False  
SupportsBroadcasting True  
SupportsConnectData False  
SupportsDisconnectData False  
SupportsEncryption False  
SupportsExpeditedData False  
SupportsFragmentation Not Available  
SupportsGracefulClosing False  
SupportsGuaranteedBandwidth False  
SupportsMulticasting False

Key Name: SYSTEM\CurrentControlSet\Services\ADPTSF  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 8:30 AM  
Value 0

Name: DisplayName  
Type: REG\_SZ  
Data: Adaptec DuraLAN PCI Ethernet/Fast Ethernet driver for  
Windows NT

Value 1  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: Group  
Type: REG\_SZ  
Data: NDIS

Value 3  
Name: ImagePath  
Type: REG\_EXPAND\_SZ  
Data: System32\DRIVERS\adptsf50.sys

Value 4  
Name: Start  
Type: REG\_DWORD  
Data: 0x3

Value 5  
Name: Tag  
Type: REG\_DWORD  
Data: 0xd

Value 6  
Name: Type  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\ADPTSF\Enum  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 9:26 AM

Value 0  
Name: 0  
Type: REG\_SZ  
Data: PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&7fe2feb&0&2050

Value 1  
Name: 1  
Type: REG\_SZ  
Data: PCI\VEN\_9004&DEV\_6915&SUBSYS\_00109004&REV\_03\4&7fe2feb&0&2850

Value 2  
Name: 2



```

Type:          REG_SZ
Data:
PCI\VEN_9004&DEV_6915&SUBSYS_00109004&REV_03\4&7907e35&0&2060

Value 3
Name:          3
Type:          REG_SZ
Data:
PCI\VEN_9004&DEV_6915&SUBSYS_00109004&REV_03\4&7907e35&0&2860

Value 4
Name:          4
Type:          REG_SZ
Data:
PCI\VEN_9004&DEV_6915&SUBSYS_00109004&REV_03\4&171f2c55&0&2070

Value 5
Name:          5
Type:          REG_SZ
Data:
PCI\VEN_9004&DEV_6915&SUBSYS_00109004&REV_03\4&171f2c55&0&2870

Value 6
Name:          6
Type:          REG_SZ
Data:
PCI\VEN_9004&DEV_6915&SUBSYS_00109004&REV_03\4&2681c776&0&2080

Value 7
Name:          7
Type:          REG_SZ
Data:
PCI\VEN_9004&DEV_6915&SUBSYS_00109004&REV_03\4&2681c776&0&2880

Value 8
Name:          Count
Type:          REG_DWORD
Data:          0x8

Value 9
Name:          NextInstance
Type:          REG_DWORD
Data:          0x8

Key Name:      SYSTEM\CurrentControlSet\Services\ADPSTF\Security
Class Name:    <NO CLASS>
Last Write Time: 3/19/1999 - 8:30 AM
Value 0
Name:          Security
Type:          REG_BINARY
Data:

```

```

00000000 01 00 14 80 a0 00 00 00 - ac 00 00 00 14 00 00 00
.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00
0.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
ÿ.....
00000030 02 00 70 00 04 00 00 00 - 00 00 18 00 fd 01 02 00
..p.....ÿ...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 74 00 6c 00
.....t.l.
00000050 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
...ÿ.....
00000060 20 00 00 00 20 02 00 00 - 00 00 00 00 00 00 18 00 ...
.....
00000070 8d 01 02 00 01 01 00 00 - 00 00 00 05 0b 00 00 00
.....
00000080 20 02 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
.....ÿ.....
00000090 00 00 00 05 20 00 00 00 - 23 02 00 00 00 00 00 00 ....
...#.....
000000a0 01 01 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
000000b0 00 00 00 05 12 00 00 00 - .....

Key Name:      SOFTWARE\Microsoft\MSSQLServer
Class Name:    <NO CLASS>
Last Write Time: 11/30/1999 - 3:12 PM

Key Name:      SOFTWARE\Microsoft\MSSQLServer\Client
Class Name:    <NO CLASS>
Last Write Time: 11/30/1999 - 3:12 PM

Key Name:      SOFTWARE\Microsoft\MSSQLServer\Client\ConnectTo
Class Name:    <NO CLASS>
Last Write Time: 3/16/1999 - 2:52 PM
Value 0
Name:          DSQUERY
Type:          REG_SZ
Data:          DBMSSOCN

Key Name:      SOFTWARE\Microsoft\MSSQLServer\Client\DB-Lib
Class Name:    <NO CLASS>
Last Write Time: 11/30/1999 - 3:12 PM
Value 0
Name:          AutoAnsiToOem
Type:          REG_SZ
Data:          ON

Value 1
Name:          UseIntlSettings
Type:          REG_SZ

```

Data: ON

Key Name: SOFTWARE\Microsoft\MSSQLServer\ClientSetup  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:12 PM  
Value 0  
Name: SQLPath  
Type: REG\_SZ  
Data: C:\MSSQL7

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:12 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication\MergeReplicationProvider  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:12 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication\MergeReplicationProvider\7.0  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:12 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication\MergeReplicationProvider\7.0\MsJet  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:12 PM  
Value 0  
Name: <NO NAME>  
Type: REG\_SZ  
Data: {f159cf30-0db4-11d1-b272-00aa00b8de95}

Key Name: SOFTWARE\Microsoft\MSSQLServer\Tracking  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:12 PM  
Value 0  
Name: {E07FDDAA-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 1  
Name: {E07FDDAC-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ  
Data:

Value 2  
Name: {E07FDDAD-5A21-11d2-9DAD-00C04F79D434}  
Type: REG\_SZ

Data:

Component Services Configuration:  
COM+ Component TPCC.AllTXns Settings:

Transactions not supported  
Enable object pooling  
Minimum pool size 70  
Maximum pool size 70  
Creation timeout 60,000  
Enable object construction  
Enable just in time activation  
Concurrency required

Key Name: SOFTWARE\Microsoft\TPCC  
Class Name: <NO CLASS>  
Last Write Time: 3/15/1999 - 3:20 PM  
Value 0  
Name: COM\_SinglePool  
Type: REG\_SZ  
Data: YES

Value 1  
Name: DB\_Protocol  
Type: REG\_SZ  
Data: DBLIB

Value 2  
Name: DbName  
Type: REG\_SZ  
Data: tpcc

Value 3  
Name: DbPassword  
Type: REG\_SZ  
Data:

Value 4  
Name: DbServer  
Type: REG\_SZ  
Data: spider

Value 5  
Name: DbUser  
Type: REG\_SZ  
Data: sa

Value 6  
Name: MaxConnections  
Type: REG\_DWORD

Data: 0x1b58

Value 7  
 Name: MaxPendingDeliveries  
 Type: REG\_DWORD  
 Data: 0x1f4

Value 8  
 Name: NumberOfDeliveryThreads  
 Type: REG\_DWORD  
 Data: 0x7

Value 9  
 Name: Path  
 Type: REG\_SZ  
 Data: c:\inetpub\wwwroot\

Value 10  
 Name: TxnMonitor  
 Type: REG\_SZ  
 Data: COM

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC  
 Class Name: <NO CLASS>  
 Last Write Time: 11/30/1999 - 2:48 PM

Value 0  
 Name: DependOnGroup  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DependOnService  
 Type: REG\_MULTI\_SZ  
 Data: IISADMIN

Value 2  
 Name: Description  
 Type: REG\_SZ  
 Data: Provides Web connectivity and administration through the Internet Information Services snap-in.

Value 3  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: World Wide Web Publishing Service

Value 4  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 5  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: C:\WINNT\System32\inetsrv\inetinfo.exe

Value 6  
 Name: ObjectName  
 Type: REG\_SZ  
 Data: LocalSystem

Value 7  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x2

Value 8  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x20

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\ASP  
 Class Name: <NO CLASS>  
 Last Write Time: 11/30/1999 - 2:48 PM

Value 0  
 Name: NOTE  
 Type: REG\_SZ  
 Data: This is for backward compatibility only.

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\ASP\Parameters  
 Class Name: <NO CLASS>  
 Last Write Time: 11/30/1999 - 2:48 PM

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 3/19/1999 - 9:26 AM

Value 0  
 Name: 0  
 Type: REG\_SZ  
 Data: Root\LEGACY\_W3SVC\0000

Value 1  
 Name: Count  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters  
Class Name: <NO CLASS>  
Last Write Time: 3/15/1999 - 3:20 PM  
Value 0  
Name: AcceptExOutstanding  
Type: REG\_DWORD  
Data: 0x100

Value 1  
Name: AccessDeniedMessage  
Type: REG\_SZ  
Data: Error: Access is Denied.

Value 2  
Name: CertMapList  
Type: REG\_SZ  
Data: C:\WINNT\System32\inetsrv\iisrmap.dll

Value 3  
Name: Filter DLLs  
Type: REG\_SZ  
Data:

Value 4  
Name: InstallPath  
Type: REG\_SZ  
Data: C:\WINNT\System32\inetsrv

Value 5  
Name: LogFileDirectory  
Type: REG\_SZ  
Data: C:\WINNT\System32\LogFiles

Value 6  
Name: MajorVersion  
Type: REG\_DWORD  
Data: 0x5

Value 7  
Name: MinorVersion  
Type: REG\_DWORD  
Data: 0

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 2:50 PM

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedData  
Factory  
Class Name: <NO CLASS>

Last Write Time: 11/30/1999 - 2:50 PM

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 2:50 PM

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Script Map  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:05 PM

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Virtual Roots  
Class Name: <NO CLASS>  
Last Write Time: 3/15/1999 - 12:45 PM

Value 0  
Name: /  
Type: REG\_SZ  
Data: c:\inetpub\wwwroot,,205

Value 1  
Name: /IISAdmin  
Type: REG\_SZ  
Data: C:\WINNT\System32\inetsrv\iisadmin,,201

Value 2  
Name: /IISHelp  
Type: REG\_SZ  
Data: c:\winnt\help\iishelp,,201

Value 3  
Name: /IISSamples  
Type: REG\_SZ  
Data: c:\inetpub\iissamples,,201

Value 4  
Name: /MSADC  
Type: REG\_SZ  
Data: c:\program files\common files\system\msadc,,205

Value 5  
Name: /Printers  
Type: REG\_SZ  
Data: C:\WINNT\web\printers,,201

Value 6  
Name: /Scripts  
Type: REG\_SZ  
Data: c:\inetpub\scripts,,204

```

Key Name:          SYSTEM\CurrentControlSet\Services\W3SVC\Performance
Class Name:        <NO CLASS>
Last Write Time:   3/19/1999 - 11:07 AM
Value 0
  Name:            Close
  Type:            REG_SZ
  Data:            CloseW3PerformanceData
Value 1
  Name:            Collect
  Type:            REG_SZ
  Data:            CollectW3PerformanceData
Value 2
  Name:            FileSize
  Type:            REG_DWORD
  Data:            0x3d10
Value 3
  Name:            FileTime
  Type:            REG_BINARY
  Data:            00000000 a0 f3 09 46 41 3b bf 01 -
Value 4
  Name:            First Counter
  Type:            REG_DWORD
  Data:            0x850
Value 5
  Name:            First Help
  Type:            REG_DWORD
  Data:            0x851
Value 6
  Name:            Last Counter
  Type:            REG_DWORD
  Data:            0x8f2
Value 7
  Name:            Last Help
  Type:            REG_DWORD
  Data:            0x8f3
Value 8
  Name:            Library
  Type:            REG_SZ
  Data:            w3ctrs.dll
Value 9
  Name:            Open
  Type:            REG_SZ
  Data:            OpenW3PerformanceData

```

```

Value 10
  Name:            WbemAdapStatus
  Type:            REG_DWORD
  Data:            0
Key Name:          SYSTEM\CurrentControlSet\Services\W3SVC\Security
Class Name:        <NO CLASS>
Last Write Time:   11/30/1999 - 2:48 PM
Value 0
  Name:            Security
  Type:            REG_BINARY
  Data:            00000000 01 00 14 80 a0 00 00 00 - ac 00 00 00 14 00 00 00
  .....
  00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00
  0.....
  00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
  Ÿ.....
  00000030 02 00 70 00 04 00 00 00 - 00 00 18 00 fd 01 02 00
  ..p.....Ÿ...
  00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 74 00 6f 00
  .....t.o.
  00000050 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
  ...Ÿ.....
  00000060 20 00 00 00 20 02 00 00 - 72 00 73 00 00 00 18 00 ...
  ...r.s.....
  00000070 8d 01 02 00 01 01 00 00 - 00 00 00 05 0b 00 00 00
  .....
  00000080 20 02 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
  .....Ÿ.....
  00000090 00 00 00 05 20 00 00 00 - 23 02 00 00 72 00 73 00 ....
  ...#...r.s.
  000000a0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
  .....
  000000b0 00 00 00 05 12 00 00 00 -
  .....
Key Name:          SYSTEM\CurrentControlSet\Services\Tcpip
Class Name:        Class
Last Write Time:   11/30/1999 - 3:38 PM
Value 0
  Name:            Description
  Type:            REG_SZ
  Data:            TCP/IP Protocol Driver
Value 1
  Name:            DisplayName
  Type:            REG_SZ
  Data:            TCP/IP Protocol Driver
Value 2

```

Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 3  
 Name: Group  
 Type: REG\_SZ  
 Data: PNP\_TDI

Value 4  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: System32\DRIVERS\tcpip.sys

Value 5  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x1

Value 6  
 Name: Tag  
 Type: REG\_DWORD  
 Data: 0x4

Value 7  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 3/19/1999 - 9:26 AM

Value 0  
 Name: 0  
 Type: REG\_SZ  
 Data: Root\LEGACY\_TCPIP\0000

Value 1  
 Name: Count  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Linkage  
 Class Name: <NO CLASS>  
 Last Write Time: 3/19/1999 - 8:30 AM  
 Value 0

Name: Bind  
 Type: REG\_MULTI\_SZ  
 Data: \Device\{8C0E0FA5-A0E9-44B8-9574-56CB00B61622}  
 \Device\{7629D0B4-AE77-42EF-AA30-02FE94958788}  
 \Device\{22952CD6-289C-4091-AD4A-EE1380D61F22}  
 \Device\{AED5412A-08F2-459B-BC77-DD710DC51898}  
 \Device\{AD95CD3F-D209-4F78-8AD3-167D84FE9B25}  
 \Device\{FAEE3419-626D-4AB7-828D-EE0929036888}  
 \Device\{83865ADC-A313-40AE-8435-69B3878E6994}  
 \Device\{9539A88F-6D41-446C-91D7-3E5A18407CA6}  
 \Device\{24BF2DA1-6F4A-4EF8-82F7-2C8DB7817F52}  
 \Device\NdisWanIp

Value 1  
 Name: Export  
 Type: REG\_MULTI\_SZ  
 Data: \Device\Tcpip\_{8C0E0FA5-A0E9-44B8-9574-56CB00B61622}  
 \Device\Tcpip\_{7629D0B4-AE77-42EF-AA30-02FE94958788}  
 \Device\Tcpip\_{22952CD6-289C-4091-AD4A-EE1380D61F22}  
 \Device\Tcpip\_{AED5412A-08F2-459B-BC77-DD710DC51898}  
 \Device\Tcpip\_{AD95CD3F-D209-4F78-8AD3-167D84FE9B25}  
 \Device\Tcpip\_{FAEE3419-626D-4AB7-828D-EE0929036888}  
 \Device\Tcpip\_{83865ADC-A313-40AE-8435-69B3878E6994}  
 \Device\Tcpip\_{9539A88F-6D41-446C-91D7-3E5A18407CA6}  
 \Device\Tcpip\_{24BF2DA1-6F4A-4EF8-82F7-2C8DB7817F52}  
 \Device\Tcpip\_{43107499-2A1C-4CD0-ACA2-0A98B1575075}  
 \Device\Tcpip\_{3CBACB77-DB9E-4FBC-AF47-B6534495A056}

Value 2  
 Name: Route  
 Type: REG\_MULTI\_SZ  
 Data: "{8C0E0FA5-A0E9-44B8-9574-56CB00B61622}"  
 "{7629D0B4-AE77-42EF-AA30-02FE94958788}"  
 "{22952CD6-289C-4091-AD4A-EE1380D61F22}"  
 "{AED5412A-08F2-459B-BC77-DD710DC51898}"  
 "{AD95CD3F-D209-4F78-8AD3-167D84FE9B25}"  
 "{FAEE3419-626D-4AB7-828D-EE0929036888}"  
 "{83865ADC-A313-40AE-8435-69B3878E6994}"  
 "{9539A88F-6D41-446C-91D7-3E5A18407CA6}"  
 "{24BF2DA1-6F4A-4EF8-82F7-2C8DB7817F52}"  
 "NdisWanIp"

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Parameters  
 Class Name: Class  
 Last Write Time: 3/19/1999 - 8:48 AM  
 Value 0  
 Name: AllowUnqualifiedQuery  
 Type: REG\_DWORD  
 Data: 0

Value 1	Name: DataBasePath	Type: REG_EXPAND_SZ	Data: %SystemRoot%\System32\drivers\etc	Type: REG_SZ	Data:
Value 2	Name: DeadGWDetectDefault	Type: REG_DWORD	Data: 0x1	Value 12	Name: NV Hostname
Value 3	Name: Domain	Type: REG_SZ	Data:	Type: REG_SZ	Data: GRAU
Value 4	Name: DontAddDefaultGatewayDefault	Type: REG_DWORD	Data: 0	Value 13	Name: PerformRouterDiscoveryDefault
Value 5	Name: EnableICMPRedirect	Type: REG_DWORD	Data: 0x1	Type: REG_DWORD	Data: 0x2
Value 6	Name: EnableSecurityFilters	Type: REG_DWORD	Data: 0	Value 14	Name: PrioritizeRecordData
Value 7	Name: ForwardBroadcasts	Type: REG_DWORD	Data: 0	Type: REG_DWORD	Data: 0x1
Value 8	Name: Hostname	Type: REG_SZ	Data: GRAU	Value 15	Name: SearchList
Value 9	Name: IPEnableRouter	Type: REG_DWORD	Data: 0	Type: REG_SZ	Data:
Value 10	Name: MaxUserPort	Type: REG_DWORD	Data: 0xffffe	Value 16	Name: UseDomainNameDevolution
Value 11	Name: NameServer	Type: REG_SZ	Data:	Type: REG_DWORD	Data: 0
				Key Name:	SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters
				Class Name:	<NO CLASS>
				Last Write Time:	11/30/1999 - 3:38 PM
				Key Name:	SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\NdisWanIp
				Class Name:	<NO CLASS>
				Last Write Time:	11/30/1999 - 3:39 PM
				Value 0	Name: IpConfig
				Type: REG_MULTI_SZ	Data: Tcpip\Parameters\Interfaces\{43107499-2A1C-4CD0-ACA2-0A98B1575075}
					Tcpip\Parameters\Interfaces\{3CBACB77-DB9E-4FBC-AF47-B6534495A056}
				Value 1	Name: IpInterfaces
				Type: REG_BINARY	Data: 00000000 99 74 10 43 1c 2a d0 4c - ac a2 0a 98 b1 57 50 75
					.t.C.*DL-ç..±WPu

00000010 77 cb ba 3c 9e db bc 4f - af 47 b6 53 44 95 a0 56  
wE°<.Ū%O-G¶SD. V

Value 2  
Name: LLInterface  
Type: REG\_SZ  
Data: WANARP

Value 3  
Name: NumInterfaces  
Type: REG\_DWORD  
Data: 0x2

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{22952CD6-289C-4091-AD4A-EE1380D61F22}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 8:30 AM  
Value 0  
Name: IpConfig  
Type: REG\_MULTI\_SZ  
Data: Tcpip\Parameters\Interfaces\{22952CD6-289C-4091-AD4A-EE1380D61F22}

Value 1  
Name: LLInterface  
Type: REG\_SZ  
Data:

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{24BF2DA1-6F4A-4EF8-82F7-2C8DB7817F52}  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:38 PM  
Value 0  
Name: IpConfig  
Type: REG\_MULTI\_SZ  
Data: Tcpip\Parameters\Interfaces\{24BF2DA1-6F4A-4EF8-82F7-2C8DB7817F52}

Value 1  
Name: LLInterface  
Type: REG\_SZ  
Data:

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{7629D0B4-AE77-42EF-AA30-02FE94958788}

Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 8:30 AM  
Value 0  
Name: IpConfig  
Type: REG\_MULTI\_SZ  
Data: Tcpip\Parameters\Interfaces\{7629D0B4-AE77-42EF-AA30-02FE94958788}

Value 1  
Name: LLInterface  
Type: REG\_SZ  
Data:

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{83865ADC-A313-40AE-8435-69B3878E6994}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 8:30 AM  
Value 0  
Name: IpConfig  
Type: REG\_MULTI\_SZ  
Data: Tcpip\Parameters\Interfaces\{83865ADC-A313-40AE-8435-69B3878E6994}

Value 1  
Name: LLInterface  
Type: REG\_SZ  
Data:

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{8C0E0FA5-A0E9-44B8-9574-56CB00B61622}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 8:30 AM  
Value 0  
Name: IpConfig  
Type: REG\_MULTI\_SZ  
Data: Tcpip\Parameters\Interfaces\{8C0E0FA5-A0E9-44B8-9574-56CB00B61622}

Value 1  
Name: LLInterface  
Type: REG\_SZ  
Data:



Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{9539A88F-6D41-446C-91D7-3E5A18407CA6}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 8:30 AM  
Value 0  
Name: IpConfig  
Type: REG\_MULTI\_SZ  
Data: Tcpip\Parameters\Interfaces\{9539A88F-6D41-446C-91D7-3E5A18407CA6}

Value 1  
Name: LLInterface  
Type: REG\_SZ  
Data:

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{AD95CD3F-D209-4F78-8AD3-167D84FE9B25}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 8:30 AM  
Value 0  
Name: IpConfig  
Type: REG\_MULTI\_SZ  
Data: Tcpip\Parameters\Interfaces\{AD95CD3F-D209-4F78-8AD3-167D84FE9B25}

Value 1  
Name: LLInterface  
Type: REG\_SZ  
Data:

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{AED5412A-08F2-459B-BC77-DD710DC51898}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 8:30 AM  
Value 0  
Name: IpConfig  
Type: REG\_MULTI\_SZ  
Data: Tcpip\Parameters\Interfaces\{AED5412A-08F2-459B-BC77-DD710DC51898}

Value 1  
Name: LLInterface  
Type: REG\_SZ  
Data:

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Adapters\{FAEE3419-626D-4AB7-828D-EE0929036888}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 8:30 AM  
Value 0  
Name: IpConfig  
Type: REG\_MULTI\_SZ  
Data: Tcpip\Parameters\Interfaces\{FAEE3419-626D-4AB7-828D-EE0929036888}

Value 1  
Name: LLInterface  
Type: REG\_SZ  
Data:

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\DNSRegisteredAdapters  
Class Name: DynDnsRootClass  
Last Write Time: 11/30/1999 - 3:38 PM

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:38 PM

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{22952CD6-289C-4091-AD4A-EE1380D61F22}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 9:07 AM  
Value 0  
Name: DefaultGateway  
Type: REG\_MULTI\_SZ  
Data:

Value 1  
Name: DefaultGatewayMetric  
Type: REG\_MULTI\_SZ  
Data:

Value 2  
Name: DisableDynamicUpdate  
Type: REG\_DWORD  
Data: 0x1

Value 3  
Name: Domain  
Type: REG\_SZ  
Data:

Value 4  
 Name: EnableAdapterDomainNameRegistration  
 Type: REG\_DWORD  
 Data: 0

Value 5  
 Name: EnableDeadGWDetect  
 Type: REG\_DWORD  
 Data: 0x1

Value 6  
 Name: EnableDHCP  
 Type: REG\_DWORD  
 Data: 0

Value 7  
 Name: InterfaceMetric  
 Type: REG\_DWORD  
 Data: 0x1

Value 8  
 Name: IPAddress  
 Type: REG\_MULTI\_SZ  
 Data: 129.103.144.2

Value 9  
 Name: NameServer  
 Type: REG\_SZ  
 Data:

Value 10  
 Name: NTEContextList  
 Type: REG\_MULTI\_SZ  
 Data: 0x00000006

Value 11  
 Name: PerformRouterDiscovery  
 Type: REG\_DWORD  
 Data: 0x2

Value 12  
 Name: RawIPAllowedProtocols  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 13  
 Name: SubnetMask  
 Type: REG\_MULTI\_SZ  
 Data: 255.255.255.0

Value 14  
 Name: TCPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 15  
 Name: UDPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 16  
 Name: UseZeroBroadcast  
 Type: REG\_DWORD  
 Data: 0

Key Name:  
 SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{24BF2DA1-6F4A-4EF8-82F7-2C8DB7817F52}  
 Class Name: <NO CLASS>  
 Last Write Time: 3/19/1999 - 8:49 AM

Value 0  
 Name: DefaultGateway  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DefaultGatewayMetric  
 Type: REG\_MULTI\_SZ  
 Data:

Value 2  
 Name: DhcpIPAddress  
 Type: REG\_SZ  
 Data: 0.0.0.0

Value 3  
 Name: DhcpSubnetMask  
 Type: REG\_SZ  
 Data: 255.0.0.0

Value 4  
 Name: DisableDynamicUpdate  
 Type: REG\_DWORD  
 Data: 0

Value 5  
 Name: Domain  
 Type: REG\_SZ

Data:

Value 6  
 Name: EnableAdapterDomainNameRegistration  
 Type: REG\_DWORD  
 Data: 0

Value 7  
 Name: EnableDeadGWDetect  
 Type: REG\_DWORD  
 Data: 0x1

Value 8  
 Name: EnableDHCP  
 Type: REG\_DWORD  
 Data: 0x1

Value 9  
 Name: InterfaceMetric  
 Type: REG\_DWORD  
 Data: 0x1

Value 10  
 Name: IPAddress  
 Type: REG\_MULTI\_SZ  
 Data: 0.0.0.0

Value 11  
 Name: NameServer  
 Type: REG\_SZ  
 Data:

Value 12  
 Name: NTEContextList  
 Type: REG\_MULTI\_SZ  
 Data:

Value 13  
 Name: PerformRouterDiscovery  
 Type: REG\_DWORD  
 Data: 0x2

Value 14  
 Name: RawIPAllowedProtocols  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 15  
 Name: SubnetMask  
 Type: REG\_MULTI\_SZ  
 Data: 0.0.0.0

Value 16  
 Name: TCPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 17  
 Name: UDPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 18  
 Name: UseZeroBroadcast  
 Type: REG\_DWORD  
 Data: 0

Key Name:  
 SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{3CBACB77-DB9E-4FBC-AF47-B6534495A056}  
 Class Name: <NO CLASS>  
 Last Write Time: 11/30/1999 - 3:39 PM

Value 0  
 Name: DefaultGateway  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DontAddDefaultGateway  
 Type: REG\_DWORD  
 Data: 0

Value 2  
 Name: EnableDeadGWDetect  
 Type: REG\_DWORD  
 Data: 0x1

Value 3  
 Name: EnableDHCP  
 Type: REG\_DWORD  
 Data: 0

Value 4  
 Name: IPAddress  
 Type: REG\_MULTI\_SZ  
 Data: 0.0.0.0

Value 5  
 Name: PerformRouterDiscovery

Type: REG\_DWORD  
Data: 0x2

Value 6  
Name: SubnetMask  
Type: REG\_MULTI\_SZ  
Data: 0.0.0.0

Value 7  
Name: UseZeroBroadcast  
Type: REG\_DWORD  
Data: 0

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{43107499-2A1C-4CD0-ACA2-0A98B1575075}  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:39 PM

Value 0  
Name: DefaultGateway  
Type: REG\_MULTI\_SZ  
Data:

Value 1  
Name: DontAddDefaultGateway  
Type: REG\_DWORD  
Data: 0

Value 2  
Name: EnableDeadGWDetect  
Type: REG\_DWORD  
Data: 0x1

Value 3  
Name: EnableDHCP  
Type: REG\_DWORD  
Data: 0

Value 4  
Name: IPAddress  
Type: REG\_MULTI\_SZ  
Data: 0.0.0.0

Value 5  
Name: PerformRouterDiscovery  
Type: REG\_DWORD  
Data: 0x2

Value 6  
Name: SubnetMask

Type: REG\_MULTI\_SZ  
Data: 0.0.0.0

Value 7  
Name: UseZeroBroadcast  
Type: REG\_DWORD  
Data: 0

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{7629D0B4-AE77-42EF-AA30-02FE94958788}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 9:07 AM

Value 0  
Name: DefaultGateway  
Type: REG\_MULTI\_SZ  
Data:

Value 1  
Name: DefaultGatewayMetric  
Type: REG\_MULTI\_SZ  
Data:

Value 2  
Name: DisableDynamicUpdate  
Type: REG\_DWORD  
Data: 0x1

Value 3  
Name: Domain  
Type: REG\_SZ  
Data:

Value 4  
Name: EnableAdapterDomainNameRegistration  
Type: REG\_DWORD  
Data: 0

Value 5  
Name: EnableDeadGWDetect  
Type: REG\_DWORD  
Data: 0x1

Value 6  
Name: EnableDHCP  
Type: REG\_DWORD  
Data: 0

Value 7  
Name: InterfaceMetric  
Type: REG\_DWORD

Data: 0x1

Value 8  
 Name: IPAddress  
 Type: REG\_MULTI\_SZ  
 Data: 129.103.145.2

Value 9  
 Name: NameServer  
 Type: REG\_SZ  
 Data:

Value 10  
 Name: NTEContextList  
 Type: REG\_MULTI\_SZ  
 Data: 0x00000009

Value 11  
 Name: PerformRouterDiscovery  
 Type: REG\_DWORD  
 Data: 0x2

Value 12  
 Name: RawIPAllowedProtocols  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 13  
 Name: SubnetMask  
 Type: REG\_MULTI\_SZ  
 Data: 255.255.255.0

Value 14  
 Name: TCPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 15  
 Name: UDPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 16  
 Name: UseZeroBroadcast  
 Type: REG\_DWORD  
 Data: 0

Key Name:  
 SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{83865ADC-  
 A313-40AE-8435-69B3878E6994}  
 Class Name: <NO CLASS>  
 Last Write Time: 3/19/1999 - 9:07 AM

Value 0  
 Name: DefaultGateway  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DefaultGatewayMetric  
 Type: REG\_MULTI\_SZ  
 Data:

Value 2  
 Name: DisableDynamicUpdate  
 Type: REG\_DWORD  
 Data: 0x1

Value 3  
 Name: Domain  
 Type: REG\_SZ  
 Data:

Value 4  
 Name: EnableAdapterDomainNameRegistration  
 Type: REG\_DWORD  
 Data: 0

Value 5  
 Name: EnableDeadGWDetect  
 Type: REG\_DWORD  
 Data: 0x1

Value 6  
 Name: EnabledDHCP  
 Type: REG\_DWORD  
 Data: 0

Value 7  
 Name: InterfaceMetric  
 Type: REG\_DWORD  
 Data: 0x1

Value 8  
 Name: IPAddress  
 Type: REG\_MULTI\_SZ  
 Data: 129.103.140.2

Value 9

```

Name:      NameServer
Type:      REG_SZ
Data:

Value 10
Name:      NTEContextList
Type:      REG_MULTI_SZ
Data:      0x00000004

Value 11
Name:      PerformRouterDiscovery
Type:      REG_DWORD
Data:      0x2

Value 12
Name:      RawIPAllowedProtocols
Type:      REG_MULTI_SZ
Data:      0

Value 13
Name:      SubnetMask
Type:      REG_MULTI_SZ
Data:      255.255.255.0

Value 14
Name:      TCPAllowedPorts
Type:      REG_MULTI_SZ
Data:      0

Value 15
Name:      UDPAllowedPorts
Type:      REG_MULTI_SZ
Data:      0

Value 16
Name:      UseZeroBroadcast
Type:      REG_DWORD
Data:      0

Key Name:
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{8C0E0FA5-
A0E9-44B8-9574-56CB00B61622}
Class Name: <NO CLASS>
Last Write Time: 3/19/1999 - 9:07 AM
Value 0
Name:      DefaultGateway
Type:      REG_MULTI_SZ

```

```

Data:

Value 1
Name:      DefaultGatewayMetric
Type:      REG_MULTI_SZ
Data:

Value 2
Name:      DisableDynamicUpdate
Type:      REG_DWORD
Data:      0x1

Value 3
Name:      Domain
Type:      REG_SZ
Data:

Value 4
Name:      EnableAdapterDomainNameRegistration
Type:      REG_DWORD
Data:      0

Value 5
Name:      EnableDeadGWDetect
Type:      REG_DWORD
Data:      0x1

Value 6
Name:      EnableDHCP
Type:      REG_DWORD
Data:      0

Value 7
Name:      InterfaceMetric
Type:      REG_DWORD
Data:      0x1

Value 8
Name:      IPAddress
Type:      REG_MULTI_SZ
Data:      129.103.146.2

Value 9
Name:      NameServer
Type:      REG_SZ
Data:

Value 10
Name:      NTEContextList
Type:      REG_MULTI_SZ
Data:      0x00000008

```

Value 11	Name: PerformRouterDiscovery	Type: REG_DWORD	Data: 0x2	Type: REG_DWORD	Data: 0x1
Value 12	Name: RawIPAllowedProtocols	Type: REG_MULTI_SZ	Data: 0	Value 3	Name: Domain
Value 13	Name: SubnetMask	Type: REG_MULTI_SZ	Data: 255.255.255.0	Type: REG_SZ	Data:
Value 14	Name: TCPAllowedPorts	Type: REG_MULTI_SZ	Data: 0	Value 4	Name: EnableAdapterDomainNameRegistration
Value 15	Name: UDPAllowedPorts	Type: REG_MULTI_SZ	Data: 0	Type: REG_DWORD	Data: 0
Value 16	Name: UseZeroBroadcast	Type: REG_DWORD	Data: 0	Value 5	Name: EnableDeadGWDetect
Key Name:	SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{9539A88F-6D41-446C-91D7-3E5A18407CA6}			Type: REG_DWORD	Data: 0x1
Class Name:	<NO CLASS>			Value 6	Name: EnableDHCP
Last Write Time:	3/19/1999 - 9:07 AM			Type: REG_DWORD	Data: 0
Value 0	Name: DefaultGateway	Type: REG_MULTI_SZ	Data:	Value 7	Name: InterfaceMetric
Value 1	Name: DefaultGatewayMetric	Type: REG_MULTI_SZ	Data:	Type: REG_DWORD	Data: 0x1
Value 2	Name: DisableDynamicUpdate	Type: REG_DWORD	Data:	Value 8	Name: IPAddress
				Type: REG_MULTI_SZ	Data: 129.103.181.124
				Value 9	Name: NameServer
				Type: REG_SZ	Data:
				Value 10	Name: NTEContextList
				Type: REG_MULTI_SZ	Data: 0x00000005
				Value 11	Name: PerformRouterDiscovery
				Type: REG_DWORD	Data: 0x2
				Value 12	Name: RawIPAllowedProtocols
				Type: REG_MULTI_SZ	Data:

Data: 0

Value 13  
 Name: SubnetMask  
 Type: REG\_MULTI\_SZ  
 Data: 255.255.255.0

Value 14  
 Name: TCPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 15  
 Name: UDPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 16  
 Name: UseZeroBroadcast  
 Type: REG\_DWORD  
 Data: 0

Key Name:  
 SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{AD95CD3F-D209-4F78-8AD3-167D84FE9B25}  
 Class Name: <NO CLASS>  
 Last Write Time: 3/19/1999 - 9:07 AM

Value 0  
 Name: DefaultGateway  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DefaultGatewayMetric  
 Type: REG\_MULTI\_SZ  
 Data:

Value 2  
 Name: DisableDynamicUpdate  
 Type: REG\_DWORD  
 Data: 0x1

Value 3  
 Name: Domain  
 Type: REG\_SZ  
 Data:

Value 4

Name: EnableAdapterDomainNameRegistration  
 Type: REG\_DWORD  
 Data: 0

Value 5  
 Name: EnableDeadGWDetect  
 Type: REG\_DWORD  
 Data: 0x1

Value 6  
 Name: EnableDHCP  
 Type: REG\_DWORD  
 Data: 0

Value 7  
 Name: InterfaceMetric  
 Type: REG\_DWORD  
 Data: 0x1

Value 8  
 Name: IPAddress  
 Type: REG\_MULTI\_SZ  
 Data: 129.103.142.2

Value 9  
 Name: NameServer  
 Type: REG\_SZ  
 Data:

Value 10  
 Name: NTEContextList  
 Type: REG\_MULTI\_SZ  
 Data: 0x00000002

Value 11  
 Name: PerformRouterDiscovery  
 Type: REG\_DWORD  
 Data: 0x2

Value 12  
 Name: RawIPAllowedProtocols  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 13  
 Name: SubnetMask  
 Type: REG\_MULTI\_SZ  
 Data: 255.255.255.0



Value 14  
Name: TCPAllowedPorts  
Type: REG\_MULTI\_SZ  
Data: 0

Value 15  
Name: UDPAllowedPorts  
Type: REG\_MULTI\_SZ  
Data: 0

Value 16  
Name: UseZeroBroadcast  
Type: REG\_DWORD  
Data: 0

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{AED5412A-08F2-459B-BC77-DD710DC51898}  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 9:07 AM

Value 0  
Name: DefaultGateway  
Type: REG\_MULTI\_SZ  
Data:

Value 1  
Name: DefaultGatewayMetric  
Type: REG\_MULTI\_SZ  
Data:

Value 2  
Name: DisableDynamicUpdate  
Type: REG\_DWORD  
Data: 0x1

Value 3  
Name: Domain  
Type: REG\_SZ  
Data:

Value 4  
Name: EnableAdapterDomainNameRegistration  
Type: REG\_DWORD  
Data: 0

Value 5  
Name: EnableDeadGWDetect  
Type: REG\_DWORD  
Data: 0x1

Value 6  
Name: EnabledDHCP  
Type: REG\_DWORD  
Data: 0

Value 7  
Name: InterfaceMetric  
Type: REG\_DWORD  
Data: 0x1

Value 8  
Name: IPAddress  
Type: REG\_MULTI\_SZ  
Data: 129.103.143.2

Value 9  
Name: NameServer  
Type: REG\_SZ  
Data:

Value 10  
Name: NTEContextList  
Type: REG\_MULTI\_SZ  
Data: 0x00000007

Value 11  
Name: PerformRouterDiscovery  
Type: REG\_DWORD  
Data: 0x2

Value 12  
Name: RawIPAllowedProtocols  
Type: REG\_MULTI\_SZ  
Data: 0

Value 13  
Name: SubnetMask  
Type: REG\_MULTI\_SZ  
Data: 255.255.255.0

Value 14  
Name: TCPAllowedPorts  
Type: REG\_MULTI\_SZ  
Data: 0

Value 15  
Name: UDPAllowedPorts  
Type: REG\_MULTI\_SZ

Data: 0

Value 16  
 Name: UseZeroBroadcast  
 Type: REG\_DWORD  
 Data: 0

Key Name:  
 SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Interfaces\{FAEE3419-626D-4AB7-828D-EE0929036888}  
 Class Name: <NO CLASS>  
 Last Write Time: 3/19/1999 - 9:07 AM

Value 0  
 Name: DefaultGateway  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DefaultGatewayMetric  
 Type: REG\_MULTI\_SZ  
 Data:

Value 2  
 Name: DisableDynamicUpdate  
 Type: REG\_DWORD  
 Data: 0x1

Value 3  
 Name: Domain  
 Type: REG\_SZ  
 Data:

Value 4  
 Name: EnableAdapterDomainNameRegistration  
 Type: REG\_DWORD  
 Data: 0

Value 5  
 Name: EnableDeadGWDetect  
 Type: REG\_DWORD  
 Data: 0x1

Value 6  
 Name: EnableDHCP  
 Type: REG\_DWORD  
 Data: 0

Value 7  
 Name: InterfaceMetric  
 Type: REG\_DWORD  
 Data: 0x1

Value 8  
 Name: IPAddress  
 Type: REG\_MULTI\_SZ  
 Data: 129.103.141.2

Value 9  
 Name: NameServer  
 Type: REG\_SZ  
 Data:

Value 10  
 Name: NTEContextList  
 Type: REG\_MULTI\_SZ  
 Data: 0x00000003

Value 11  
 Name: PerformRouterDiscovery  
 Type: REG\_DWORD  
 Data: 0x2

Value 12  
 Name: RawIPAllowedProtocols  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 13  
 Name: SubnetMask  
 Type: REG\_MULTI\_SZ  
 Data: 255.255.255.0

Value 14  
 Name: TCPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 15  
 Name: UDPAllowedPorts  
 Type: REG\_MULTI\_SZ  
 Data: 0

Value 16  
 Name: UseZeroBroadcast  
 Type: REG\_DWORD  
 Data: 0

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\PersistentRoutes  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:38 PM

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\Winsock  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:38 PM

Value 0  
Name: HelperDllName  
Type: REG\_EXPAND\_SZ  
Data: %SystemRoot%\System32\wshtcpip.dll

Value 1  
Name: Mapping  
Type: REG\_BINARY  
Data:  
00000000 0b 00 00 00 03 00 00 00 - 02 00 00 00 01 00 00 00  
.....  
00000010 06 00 00 00 02 00 00 00 - 01 00 00 00 00 00 00 00  
.....  
00000020 02 00 00 00 00 00 00 00 - 06 00 00 00 00 00 00 00  
.....  
00000030 00 00 00 00 06 00 00 00 - 00 00 00 00 01 00 00 00  
.....  
00000040 06 00 00 00 02 00 00 00 - 02 00 00 00 11 00 00 00  
.....  
00000050 02 00 00 00 02 00 00 00 - 00 00 00 00 02 00 00 00  
.....  
00000060 00 00 00 00 11 00 00 00 - 00 00 00 00 00 00 00 00  
.....  
00000070 11 00 00 00 00 00 00 00 - 02 00 00 00 11 00 00 00  
.....  
00000080 02 00 00 00 03 00 00 00 - 00 00 00 00  
.....

Value 2  
Name: MaxSockAddrLength  
Type: REG\_DWORD  
Data: 0x10

Value 3  
Name: MinSockAddrLength  
Type: REG\_DWORD  
Data: 0x10

Value 4  
Name: UseDelayedAcceptance  
Type: REG\_DWORD  
Data: 0

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Performance  
Class Name: <NO CLASS>  
Last Write Time: 3/19/1999 - 11:07 AM

Value 0  
Name: Close  
Type: REG\_SZ  
Data: CloseTcpIpPerformanceData

Value 1  
Name: Collect  
Type: REG\_SZ  
Data: CollectTcpIpPerformanceData

Value 2  
Name: FileSize  
Type: REG\_DWORD  
Data: 0xa310

Value 3  
Name: FileTime  
Type: REG\_BINARY  
Data:  
00000000 00 80 bf 6c 1f fb be 01 - ..¿l.û%.

Value 4  
Name: Library  
Type: REG\_SZ  
Data: Perfctrs.dll

Value 5  
Name: Open  
Type: REG\_SZ  
Data: OpenTcpIpPerformanceData

Value 6  
Name: WbemAdapStatus  
Type: REG\_DWORD  
Data: 0

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Security  
Class Name: <NO CLASS>  
Last Write Time: 11/30/1999 - 3:38 PM

Value 0  
Name: Security  
Type: REG\_BINARY  
Data:  
00000000 01 00 14 80 a0 00 00 00 - ac 00 00 00 14 00 00 00  
.....  
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00  
0.....  
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
ÿ.....

```

00000030 02 00 70 00 04 00 00 00 - 00 00 18 00 fd 01 02 00
..P.....ÿ...
00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 02 00 00 00
.....
00000050 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
....ÿ.....
00000060 20 00 00 00 20 02 00 00 - 03 00 00 00 00 00 18 00 ...
.....
00000070 8d 01 02 00 01 01 00 00 - 00 00 00 05 0b 00 00 00
.....
00000080 20 02 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
.....ÿ.....
00000090 00 00 00 05 20 00 00 00 - 23 02 00 00 03 00 00 00 ....
...#.....
000000a0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
000000b0 00 00 00 05 12 00 00 00 - .....

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\Tcpip\ServiceProvider
Class Name: <NO CLASS>
Last Write Time: 11/30/1999 - 3:38 PM

```

```

Value 0
  Name:      Class
  Type:     REG_DWORD
  Data:     0x8

Value 1
  Name:     DnsPriority
  Type:    REG_DWORD
  Data:    0x7d0

Value 2
  Name:     HostsPriority
  Type:    REG_DWORD
  Data:    0x1f4

Value 3
  Name:     LocalPriority
  Type:    REG_DWORD
  Data:    0x1f3

Value 4
  Name:     Name
  Type:    REG_SZ
  Data:    TCP/IP

Value 5
  Name:     NetbtPriority
  Type:    REG_DWORD
  Data:    0x7d1

```

```

Value 6
  Name:     ProviderPath
  Type:    REG_EXPAND_SZ
  Data:    %SystemRoot%\System32\wsock32.dll

Key Name:     SYSTEM\CurrentControlSet\Services\InetInfo
Class Name:   <NO CLASS>
Last Write Time: 11/30/1999 - 2:46 PM

Key Name:     SYSTEM\CurrentControlSet\Services\InetInfo\Parameters
Class Name:   <NO CLASS>
Last Write Time: 3/15/1999 - 3:20 PM

Value 0
  Name:     DispatchEntries
  Type:    REG_MULTI_SZ
  Data:    LDAPSV
          SMTPSV

Value 1
  Name:     ListenBackLog
  Type:    REG_DWORD
  Data:    0x1388

Value 2
  Name:     PoolThreadLimit
  Type:    REG_DWORD
  Data:    0x100

Value 3
  Name:     ThreadTimeout
  Type:    REG_DWORD
  Data:    0x15180

Key Name:     SYSTEM\CurrentControlSet\Services\InetInfo\Performance
Class Name:   <NO CLASS>
Last Write Time: 3/19/1999 - 11:07 AM

Value 0
  Name:     Close
  Type:    REG_SZ
  Data:    CloseINFOPerformanceData

Value 1
  Name:     Collect
  Type:    REG_SZ
  Data:    CollectINFOPerformanceData

Value 2
  Name:     FileSize
  Type:    REG_DWORD
  Data:    0x2510

```

Value 3  
 Name: FileTime  
 Type: REG\_BINARY  
 Data: 00000000 10 a5 ad 42 41 3b bf 01 - .¥-BA;¿.

Value 4  
 Name: First Counter  
 Type: REG\_DWORD  
 Data: 0x802

Value 5  
 Name: First Help  
 Type: REG\_DWORD  
 Data: 0x803

Value 6  
 Name: Last Counter  
 Type: REG\_DWORD  
 Data: 0x842

Value 7  
 Name: Last Help  
 Type: REG\_DWORD  
 Data: 0x843

Value 8  
 Name: Library  
 Type: REG\_SZ  
 Data: infoctrs.dll

Value 9  
 Name: Open  
 Type: REG\_SZ  
 Data: OpenINFOPerformanceData

Value 10  
 Name: WbemAdapStatus  
 Type: REG\_DWORD  
 Data: 0

Number of Engines: 35

Name: DRIVER01  
 Description: Gelb0  
 Directory: d:\log\_gelb0.log  
 Machine: oliv  
 Parameter Set: All\_Times  
 Index: 0  
 Seed: 55983  
 Configured Users: 940  
 Pipe Name: DRIVER1237993953  
 Connect Rate: 120  
 Start Rate: 120  
 CLIENT\_NURAND: 233  
 CPU: 0

Name: DRIVER02  
 Description: Gelb1  
 Directory: d:\log\_gelb1.log  
 Machine: oliv  
 Parameter Set: All\_Times  
 Index: 100000000  
 Seed: 55983  
 Configured Users: 940  
 Pipe Name: DRIVER2238057937  
 Connect Rate: 120  
 Start Rate: 120  
 CLIENT\_NURAND: 233  
 CPU: 1

Name: DRIVER03  
 Description: Gelb2  
 Directory: d:\log\_gelb2.log  
 Machine: oliv  
 Parameter Set: All\_Times  
 Index: 200000000  
 Seed: 55983  
 Configured Users: 940  
 Pipe Name: DRIVER3238254921  
 Connect Rate: 120  
 Start Rate: 120  
 CLIENT\_NURAND: 233  
 CPU: 2

Name: DRIVER04  
 Description: Gelb3  
 Directory: d:\log\_gelb3.log  
 Machine: oliv  
 Parameter Set: All\_Times  
 Index: 300000000  
 Seed: 55983  
 Configured Users: 940  
 Pipe Name: DRIVER4238280718

**This section discloses the RTE parameters used on the Primergy 870-40 system.**

Profile: Test\_2\_5x6580\_HTML  
 File Path: E:\benchcrf\Audit1\Test\_32900\_HTML.pro  
 Version: 1.0.1

Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 3

Name: DRIVER05  
Description: Gelb4  
Directory: d:\log\_gelb4.log  
Machine: oliv  
Parameter Set: All\_Times  
Index: 400000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER5238652984  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 4

Name: DRIVER06  
Description: Gelb5  
Directory: d:\log\_gelb5.log  
Machine: oliv  
Parameter Set: All\_Times  
Index: 500000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER6238676437  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 5

Name: DRIVER07  
Description: Gelb6  
Directory: d:\log\_gelb6.log  
Machine: oliv  
Parameter Set: All\_Times  
Index: 600000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER7238927812  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 6

Name: DRIVER08  
Description: Gruen0  
Directory: c:\log\_gruen0.log  
Machine: tuerkis  
Parameter Set: All\_Times  
Index: 700000000

Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER8239451921  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 0

Name: DRIVER09  
Description: Gruen1  
Directory: c:\log\_gruen1.log  
Machine: tuerkis  
Parameter Set: All\_Times  
Index: 800000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER9239491625  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 1

Name: DRIVER10  
Description: Gruen2  
Directory: c:\log\_gruen2.log  
Machine: tuerkis  
Parameter Set: All\_Times  
Index: 900000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER10239525000  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 2

Name: DRIVER11  
Description: Gruen3  
Directory: c:\log\_gruen3.log  
Machine: tuerkis  
Parameter Set: All\_Times  
Index: 1000000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER11239552546  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 3

Name: DRIVER12  
Description: Gruen4  
Directory: c:\log\_gruen4

Machine: tuerkis  
Parameter Set: All\_Times  
Index: 1100000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER12239581187  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 0

Name: DRIVER13  
Description: Gruen5  
Directory: c:\log\_gruen5.log  
Machine: tuerkis  
Parameter Set: All\_Times  
Index: 1200000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER13239608968  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 1

Name: DRIVER14  
Description: Gruen6  
Directory: c:\log\_gruen6.log  
Machine: tuerkis  
Parameter Set: All\_Times  
Index: 1300000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER14239636609  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 2

Name: DRIVER15  
Description: Weiss0  
Directory: d:\log\_weiss0.log  
Machine: rosa  
Parameter Set: All\_Times  
Index: 1400000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER15239943046  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 0

Name: DRIVER16  
Description: Weiss1  
Directory: d:\log\_weiss1.log  
Machine: rosa  
Parameter Set: All\_Times  
Index: 1500000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER16239970640  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 1

Name: DRIVER17  
Description: Weiss2  
Directory: d:\log\_weiss2.log  
Machine: rosa  
Parameter Set: All\_Times  
Index: 1600000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER17239998515  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 2

Name: DRIVER18  
Description: Weiss3  
Directory: d:\log\_weiss3.log  
Machine: rosa  
Parameter Set: All\_Times  
Index: 1700000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER18240035296  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 3

Name: DRIVER19  
Description: Weiss4  
Directory: d:\log\_weiss4.log  
Machine: rosa  
Parameter Set: All\_Times  
Index: 1800000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER19240063468  
Connect Rate: 120  
Start Rate: 120

CLIENT\_NURAND: 233  
CPU: 4

Name: DRIVER20  
Description: Weiss5  
Directory: d:\log\_weiss5.log  
Machine: rosa  
Parameter Set: All\_Times  
Index: 1900000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER20240087515  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 5

Name: DRIVER21  
Description: Weiss6  
Directory: d:\log\_weiss6.log  
Machine: rosa  
Parameter Set: All\_Times  
Index: 2000000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER21240115531  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 6

Name: DRIVER22  
Description: Braun0  
Directory: d:\log\_braun0.log  
Machine: blau  
Parameter Set: All\_Times  
Index: 2100000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER22240457328  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 0

Name: DRIVER23  
Description: Braun1  
Directory: d:\log\_braun1.log  
Machine: blau  
Parameter Set: All\_Times  
Index: 2050000000  
Seed: 55983  
Configured Users: 940

Pipe Name: DRIVER23240489875  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 1

Name: DRIVER24  
Description: Braun2  
Directory: d:\log\_braun2.log  
Machine: blau  
Parameter Set: All\_Times  
Index: 1950000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER24240557281  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 2

Name: DRIVER25  
Description: Braun3  
Directory: d:\log\_braun3.log  
Machine: blau  
Parameter Set: All\_Times  
Index: 1850000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER25240609234  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 3

Name: DRIVER26  
Description: Braun4  
Directory: d:\log\_braun4.log  
Machine: blau  
Parameter Set: All\_Times  
Index: 1750000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER26240648875  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 4

Name: DRIVER27  
Description: Braun5  
Directory: d:\log\_braun5.log  
Machine: blau  
Parameter Set: All\_Times



Index: 1650000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER27240679359  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 5

Name: DRIVER28  
Description: Braun6  
Directory: d:\log\_braun6.log  
Machine: blau  
Parameter Set: All\_Times  
Index: 1550000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER28240716406  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 6

Name: DRIVER29  
Description: Grau0  
Directory: d:\log\_grau0.log  
Machine: schwarz  
Parameter Set: All\_Times  
Index: 1450000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER29241052125  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 0

Name: DRIVER30  
Description: Grau1  
Directory: d:\log\_grau1.log  
Machine: schwarz  
Parameter Set: All\_Times  
Index: 1350000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER30241091984  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 1

Name: DRIVER31  
Description: Grau2

Directory: d:\log\_grau2.log  
Machine: schwarz  
Parameter Set: All\_Times  
Index: 1250000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER31241125500  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 2

Name: DRIVER32  
Description: Grau3  
Directory: d:\log\_grau3.log  
Machine: schwarz  
Parameter Set: All\_Times  
Index: 1150000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER32241158296  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 3

Name: DRIVER33  
Description: Grau4  
Directory: d:\log\_grau4.log  
Machine: schwarz  
Parameter Set: All\_Times  
Index: 1050000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER33241192093  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 4

Name: DRIVER34  
Description: Grau5  
Directory: d:\log\_grau5.log  
Machine: schwarz  
Parameter Set: All\_Times  
Index: 950000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER34241242953  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 5

Name: DRIVER35  
Description: Grau6  
Directory: d:\log\_grau6.log  
Machine: schwarz  
Parameter Set: All\_Times  
Index: 850000000  
Seed: 55983  
Configured Users: 940  
Pipe Name: DRIVER35241288265  
Connect Rate: 120  
Start Rate: 120  
CLIENT\_NURAND: 233  
CPU: 6

Number of User groups: 35

Driver Engine: DRIVER01  
IIS Server: gelb0  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1 - 94  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER02  
IIS Server: gelb1  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 95 - 188  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER03  
IIS Server: gelb2  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 189 - 282  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER04  
IIS Server: gelb3  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 283 - 376  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER05  
IIS Server: gelb4  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 377 - 470  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER06  
IIS Server: gelb5  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 471 - 564  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER07  
IIS Server: gelb6  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 565 - 658  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER08  
IIS Server: gruen0  
SQL Server: spider  
User: sa  
Protocol: Html

w\_id Range: 659 - 752  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER09  
IIS Server: gruen1  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 753 - 846  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER10  
IIS Server: gruen2  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 847 - 940  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER11  
IIS Server: gruen3  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 941 - 1034  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER12  
IIS Server: gruen4  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1035 - 1128  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1

Scale Down: No

Driver Engine: DRIVER13  
IIS Server: gruen5  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1129 - 1222  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER14  
IIS Server: gruen6  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1223 - 1316  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER15  
IIS Server: weiss0  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1317 - 1410  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER16  
IIS Server: weiss1  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1411 - 1504  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER17  
IIS Server: weiss2  
SQL Server: spider

User: sa  
Protocol: Html  
w\_id Range: 1505 - 1598  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER18  
IIS Server: weiss3  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1599 - 1692  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER19  
IIS Server: weiss4  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1693 - 1786  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER20  
IIS Server: weiss5  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1787 - 1880  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER21  
IIS Server: weiss6  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1881 - 1974  
w\_id Max Warehouse: 3290  
Scale: Normal

User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER22  
IIS Server: braun0  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 1975 - 2068  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER23  
IIS Server: braun1  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2069 - 2162  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER24  
IIS Server: braun2  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2163 - 2256  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER25  
IIS Server: braun3  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2257 - 2350  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER26

IIS Server: braun4  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2351 - 2444  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER27  
IIS Server: braun5  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2445 - 2538  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER28  
IIS Server: braun6  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2539 - 2632  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER29  
IIS Server: grau0  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2633 - 2726  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER30  
IIS Server: grau1  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2727 - 2820

w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER31  
IIS Server: grau2  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2821 - 2914  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER32  
IIS Server: grau3  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 2915 - 3008  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER33  
IIS Server: grau4  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 3009 - 3102  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER34  
IIS Server: grau5  
SQL Server: spider  
User: sa  
Protocol: Html  
w\_id Range: 3103 - 3196  
w\_id Max Warehouse: 3290  
Scale: Normal  
User Count: 940  
District id: 1  
Scale Down: No

Driver Engine: DRIVER35  
 IIS Server: grau6  
 SQL Server: spider  
 User: sa  
 Protocol: Html  
 w\_id Range: 3197 - 3290  
 w\_id Max Warehouse: 3290

Scale: Normal  
 User Count: 940  
 District id: 1  
 Scale Down: No

Number of Parameter Sets: 2

		All Times HTML Param. Set				
Menu		Txn	Think	Key	RT	RT
		Weight	Time	Time	Delay	Fence
Delay						
	0.1	New Order	44.79	12.05	18.01	0.1 5
	0.1	Payment	43.06	12.05	3.01	0.1 5
	0.1	Delivery	4.05	5.05	2.01	0.1 5
	0.1	Stock Level	4.05	5.05	2.01	0.1 20
	0.1	Order Status	4.05	10.05	2.01	0.1 5
	0.1					
		~Default Default Parameter Set				
Menu		Txn	Think	Key	RT	RT
		Weight	Time	Time	Delay	Fence
Delay						
	0.1	New Order	10.00	12.05	18.01	0.1 5
	0.1	Payment	10.00	12.05	3.01	0.1 5
	0.1	Delivery	1.00	5.05	2.01	0.1 5
	0.1	Stock Level	1.00	5.05	2.01	0.1 20
	0.1	Order Status	1.00	10.05	2.01	0.1 5
	0.1					

**This section discloses the Microsoft SQL Server 7.0 Enterprise Edition parameters used on the Primergy K800 server system.**

Microsoft SQL Server Startup Parameters:  
sqlservr -c -x -T3502 -g37

where:

- c Start SQL Server independently of the Windows NT Service Control Manager
- x Disables the keeping of CPU time and cache-hit ratio statistics
- T3502 Prints a message to the SQL Server log at start and end of each checkpoint
- g37 memory in MB reserved for memory requests outside the buffer pool

Microsoft SQL Server Stack Size:

The default stack size for Microsoft SQL Server 7.0 was changed using the EDITBIN utility:  
editbin /STACK:131072

Microsoft SQL Server Configuration Parameters:

- ```
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11>
-- File:      VERSION.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Returns SQL Server version string
```

```
print " "
select convert(char(30), getdate(), 9)
print " "
```

-----  
Dec 9 1999 10:02:51:253AM

(1 row affected)

```
1> 2> 3>
select @@version
```

```
-----
-----
-----
Microsoft SQL Server 7.00 - 7.00.805 (Intel X86)
Jun 11 1999 11:48:12
COP
yright (c) 1988-1998 Microsoft Corporation
Enterprise Edition on Winde
ws NT 4.0 (Build 1381: Service Pack 5)
```

(1 row affected)

- ```
1> 2>
1> 2> 3> 4> 5> 6> 7> 8> 9> 10>
-- File:      CONFIG.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.20
--           Copyright Microsoft, 1999
-- Purpose:   Collects SQL Server configuration parameters
```

```
print " "
select convert(char(30), getdate(), 9)
print " "
```

Dec 9 1999 10:02:52:050AM

(1 row affected)

1> 2> 3> DBCC execution completed. If DBCC printed error messages, contact your system administrator.  
Configuration option changed. Run the RECONFIGURE statement to install.

sp\_configure "show advanced",1

1> 2> reconfigure with override

1> 2> sp\_configure

name	minimum	maximum	config_value	run_value
affinity mask	0	2147483647	255	255
allow updates	0	1	0	0
cost threshold for parallelism	0	32767	5	5
cursor threshold	-1	2147483647	-1	-1
default language	0	9999	0	0
default sortorder id	0	255	50	50
extended memory size (MB)	0	2147483647	0	0
fill factor (%)	0	100	0	0
index create memory (KB)	704	1600000	0	0
language in cache	3	100	3	3
language neutral full-text	0	1	0	0
lightweight pooling	0	1	1	1
locks	0	1	1	1
max async IO	5000	2147483647	0	0
max degree of parallelism	1	255	255	255
max server memory (MB)	0	32	1	1
max text repl size (B)	4	2147483647	3030	3030
max worker threads	0	2147483647	65536	65536
media retention	10	1024	392	392
min memory per query (KB)	0	365	0	0
min server memory (MB)	512	2147483647	512	512
nested triggers	0	2147483647	3030	3030
network packet size (B)	0	1	0	0
open objects	512	65535	4096	4096
priority boost	0	2147483647	0	0
query governor cost limit	0	1	1	1
query wait (s)	0	2147483647	0	0
recovery interval (min)	-1	2147483647	-1	-1
remote access	0	32767	32767	32767
remote login timeout (s)	0	1	1	1
remote proc trans	0	2147483647	5	5
remote query timeout (s)	0	1	0	0
resource timeout (s)	0	2147483647	0	0
scan for startupprocs	5	2147483647	10	10
set working set size	0	1	0	0
show advanced options	0	1	1	1
spin counter	0	1	1	1
time slice (ms)	1	2147483647	10000	10000
two digit year cutoff	50	1000	100	100
Unicode comparison style	1753	9999	2049	2049
Unicode locale id	0	2147483647	0	0
user connections	0	32767	33280	33280
user options	0	4095	0	0

1>



# Appendix D - Pricing Details

This appendix contains the calculations used to determine the number of disk drives and the number of LAN segments necessary in the priced configuration and the spreadsheet used to determine the price/performance figure.

## 180 Day Space Calculation

*The following worksheet was used to calculate the 180 day space of the system.  
Note: Numbers are in 2K pages unless otherwise specified*

Note : Numbers are in KBytes unless otherwise specified						
Warehouses	3290	tpmC	40696	tpmCW	12.37	
Table	Rows	Data	Index	5% Space	8H Space	Total Space
Warehouse	3,290	352	40	20		412
District	32,900	3,656	72	186		3,914
Item	100,000	9,528	96	481		10,105
New-order	29,610,000	468,144	1,304		263,200	732,648
History	98,700,000	5,483,472	0		1,085,254	6,568,726
Orders	98,700,000	3,025,288	1,670,984		929,456	5,625,728
Customer	98,700,000	71,781,824	4,609,240	3,819,553		80,210,617
Order-line	986,992,980	61,687,064	153,656		12,239,124	74,079,844
Stock	329,000,000	105,280,000	235,920	5,275,796		110,791,716
Totals		247,739,328	6,671,312	9,096,036	14,517,035	278,023,711
Segment	LogDev Cnt.	Seg. Size	Needed	Overhead		Not Needed
rnisc	8	113,049,600	87,891,592	878,916		24,279,092
customer/stock	8	194,969,600	192,912,357	1,929,124		128,120
Totals		308,019,200	280,803,948	2,808,039		24,407,212
Dynamic space	70,195,824	Sum of Data for Order, Order-Line and History				
Static space	196,118,892	Data + Index + 5% Space + Overhead - Dynamic space				
Free space	17,297,272	Total Seg. Size - Dynamic Space - Static Space - Not Needed				
Daily growth	13,892,714	(Dynamic space/W * 62.5) * tpmC				
Daily spread	-3,541,799	Free space - 1.5 * Daily growth (zero if negative)				
180 day (KB)	2,696,807,357	Static space + 180 (daily growth + daily spread)				
180 day (GB)	2571.88	180-day space in GB (excludes OS, Paging and RDBMS Logs)				
Log size (MB)	50,000	Total size of log file				
% Log used	25.7622	% of log file used during entire run				
Total N-O Txn	2586527	Total count of N-O transactions during entire run				
Log per N-O txn	5.0996	KB of log per New-Order transaction				
8 Hour Log (GB)	95.00	8 hours of log in GB (excluding space for redundancy)				
Disk Capacity	MB	GB	disks needed	disks priced		
9 GB 10000 rpm	8703	8.50				
180 day (GB)		2,571.88	302.61	384		
Disk Capacity	MB	GB	disks needed	disks priced		
36 GB 10000 rpm	34745	33.93				
8 Hour Log (RAID 1)		95.00	2.80	4+4		



# Appendix E - Price Quotations



Date: 11/23/1999

Contact Name: ~~Ernst-Joest Barthe~~  
Company: Fujitsu-Siemens Computers

Phone Number: 49 5251 828507  
Fax Number: 49 5251 815149

MegaRAID Enterprise 1500-H, PCI SCSI Disk Array Controller Quotation

## Price Quote

MegaRAID Product	Qty 1-15	Description
MegaRAID Enterprise 1500-H	2140,000 Euro	Enterprise 1500-H, P/N 4674536264, 4CH, 64MB SDRAM & BBU
Product Warranty	58,50 Euro Per Unit	Extended Warranty for two years

### **Distinguishing Features:**

- ⇒ Boot-up Configuration Utility
- ⇒ AMI high performance RAID Firmware on Flash EPROM
- ⇒ Support for Low Voltage Differential

### **Conditions:**

- ◆ All pricing are quoted FOB factory. Norcross, GA. Shipping and insurance are additional.
- ◆ Quotation is subject to the execution of a Purchase Agreement.
- ◆ 3 years limited warranty with optional 2 years extended warranty for amount of 560 per unit.
- ◆ RMA is in accordance with AMI's standard. Return and Repair within 7 days.
- ◆ Product is available now.

### **Deliverables:**

- ◆ Products will ship in bulk packaging or individually depending on quantity, each sealed in an anti-static bag.
- ◆ Manuals and Drivers(s).

Submitted by: Jason Sabatino  
RAID Program Manager

**This quotation is valid for 90 days from the date shown and is subject to the conditions as listed.**

Fujitsu Siemens Computer  
z.Hd. Herrn Miguel Isenberg  
FSC SHV Server DS 51

6. Dezember 1999

# ANGEBOT **D-link** DEUTSCHLAND

Gültigkeit bis 17.02.00

**Projekt: SIE061199/1**

Sehr geehrter Herr Isenberg,

Wir können Ihnen für das avisierte Projekt die unten aufgeführten Produkte zu folgenden Konditionen anbieten:

DES-1008	3 Stück	4 204,50 Euro
=====		
8 x 10/100Mbit Nway Switch		
=====		
DE-8097C	4500 Stück	4 29,- Euro
=====		
8 x TP, 1x Coax 10Mbit Hub		
=====		

Der angegebene Preis versteht sich netto/netto ex warehouse und bezieht sich auf das Gesamtprojekt, den nachfolgend genannten Auslieferungszeitraum und die oben aufgelistete Stückzahl. Da dieser Preis auf dem aktuellen Dollarkurs basiert, muß bei einer Kursänderung um +3% und mehr der Preis des Produktes entsprechend angepaßt werden.

Wir erwarten die Zahlung innerhalb 30 Tage, rein netto.

Die Lieferung erfolgt innerhalb von 4 Wochen nach Eingang der Bestellung. Bei rechtzeitiger Ankündigung ist die Auslieferung anderer Lotgrößen möglich.  
Bitte beziehen Sie sich bei der entsprechenden Bestellung auf die oben aufgeführte Projektkennzeichnung.

Mit freundlichen Grüßen

D-Link Deutschland GmbH

Ralf Dilthey  
Key Account Manager

# Microsoft

December 8, 1999

Frank-Joerg Baehre  
National AIG  
Frank-Joerg.Baehre@pplb.com  
49 5251 8 28307  
49 5251 8 30409

Dear Mr. Baehre:

Here is the information you requested regarding the presence of several Microsoft products to be used in conjunction with TPC-C benchmark 14180:

Microsoft Jet Server 14, Enterprise Edition with 25 (no server or embedded CALs)		
PRODENTS SQL Server 7.0 CD Labels CD	24888.00	Euro
Microsoft Windows NT Server 4.0, Enterprise Edition (no server or 25 CALs)		
720-07000	98800.00	2500.75 Euro
Windows 95 CD Server (no server or 25 CALs, as described for additional servers)		
CD 7200007	Windows 95 2000 CD CD	1470.00 Euro
Visual C++ Professional 6.0 (single user)	488.97	6.00 Euro
CONNECTOR VCL++ Pro 6.0 (single user)		
1-year maintenance for above software	12000.00	6.00 Euro

This quote is valid for the next 60 days. Some products may not be currently available but will be available through Microsoft's normal distribution by December 31, 1999.

If I can be of any further assistance, please contact me at 425-936-3101 or tombr@greatnet.com.

Yours truly,



Thomas Kravchik  
Regional Manager  
SQL Server Marketing

Microsoft Corporation is not liable for errors in this document.

085/INT SET1281 02

**Microsoft**

December 6, 1999

Fuusa-Jozer Ullrich  
Siemens AG  
Fuusa-Jozer Ullrich@pds-siemens.de  
49 5231 8 28507  
49 5251 8 30400

Dear Mr. FAHNE:

Congratulations on your great TPC-C result - breaking 40k qpmc using Microsoft SQL Server. It is my understanding that you've achieved the following result:

Hardware platform:	PRIMEENERY K400 Intel Pentium III Xeon, 600MHz Zlib C-libs, & Procsions
Database version:	SQL Server 7.0
Performance:	40400 qpmc (approx)
Price/Performance:	10.4MUSD/qpmc (approx)

Can please to give you permission to publish these results and look forward to working with you in the future.

If I can be of any further assistance, please contact me at (425) 436 1301 or tomr@microsoft.com.

Yours truly,



Tom Karyels  
Product Manager  
SQL Server Marketing

Microsoft Confidential - For Customer Reference

see TOPIC PAGE 03 vs

# Appendix F - Attestation Letter

Benchmark Sponsor:

Franz-Josef Bathe  
Fujitsu Siemens Computers  
Heinz-Nixdorf-Ring 1  
D-33106 Paderborn, Germany

December 12, 1999

I remotely verified the TPC Benchmark™ C performance of the following Client Server configuration:

Platform: **Siemens Primergy K800**  
Operating system: **Microsoft Windows NT 4.0 Enterprise Edition**  
Database Manager: **Microsoft SQL Server 7.0 Enterprise Edition**  
Transaction Manager: **Microsoft COM+ (Included in Windows 2000)**

The results were:

CPU's Speed	Memory	Disks	NewOrder 90% Response Time	tpmC
8 x Pentium III Xeon (550 MHz)	4 GB Main (2MB L2 Cache per processor)	385 x 9 GB 8 x 36 GB	0.90 Seconds	<b>40,696.25</b>
Five (5) Clients: Primergy 170 (Specification for each)				
1 x Pentium III (550 MHz)	256 MB Main Cache: 512 KB	1 x 4 GB	n/a	n/a

In my opinion, these performance results were produced in compliance with the TPC's requirements for the benchmark. The following verification items were given special attention:

- The database records were the proper size
- The database was properly scaled and populated
- The required ACID properties were met

- The transactions were correctly implemented
- Input data was generated according to the specified percentages
- The transaction cycle times included the required keying and think times
- The reported response times were correctly measured.
- All 90% response times were under the specified maximums
- At least 90% of all delivery transactions met the 80 Second completion time limit
- The reported measurement interval was 20 minutes (1200 seconds)
- The reported measurement interval was representative of steady state conditions
- One checkpoint was taken during the reported measurement interval
- The repeatability of the measured performance was verified
- The 180 day storage requirement was correctly computed
- The system pricing was verified for major components and maintenance

Respectfully Yours,



Francois Raab, President



Bradley J. Askins, Auditor