



# Hewlett-Packard Company

---

TPC Benchmark™ C  
Full Disclosure Report  
for  
HP ProLiant ML370 G5/3.16GHz Quad Core  
using  
Microsoft SQL Server 2005 Enterprise (x64) Edition (SP2)  
and  
Windows Server 2003 Enterprise (x64) Edition R2

---

**First Edition**  
**Submitted for Review**  
**January 7, 2008**

First Edition –January 2008

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2008 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2008

HP, ProLiant ML370 G5, and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows 2003, Windows Server 2003 x64 and SQL Server 2005 x64 are registered trademarks of Microsoft Corporation.

Xeon is a registered trademark of Intel.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

# Table of Contents

---

<b>TABLE OF CONTENTS</b> .....	<b>3</b>
<b>PREFACE</b> .....	<b>5</b>
TPC BENCHMARK C OVERVIEW.....	5
<b>ABSTRACT</b> .....	<b>6</b>
OVERVIEW.....	6
TPC BENCHMARK C METRICS.....	6
STANDARD AND EXECUTIVE SUMMARY STATEMENTS .....	6
AUDITOR .....	6
<b>GENERAL ITEMS</b> .....	<b>9</b>
TEST SPONSOR.....	10
APPLICATION CODE AND DEFINITION STATEMENTS .....	10
PARAMETER SETTINGS .....	10
CONFIGURATION ITEMS .....	10
<b>CLAUSE 1 RELATED ITEMS</b> .....	<b>12</b>
TABLE DEFINITIONS .....	12
PHYSICAL ORGANIZATION OF DATABASE .....	12
<i>Benchmarked Configuration:</i> .....	12
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:.....	14
INSERT AND DELETE OPERATIONS.....	15
PARTITIONING .....	15
REPLICATION, DUPLICATION OR ADDITIONS .....	15
<b>CLAUSE 2 RELATED ITEMS</b> .....	<b>16</b>
RANDOM NUMBER GENERATION.....	16
INPUT/OUTPUT SCREEN LAYOUT.....	16
PRICED TERMINAL FEATURE VERIFICATION.....	16
PRESENTATION MANAGER OR INTELLIGENT TERMINAL.....	16
TRANSACTION STATISTICS .....	17
QUEUEING MECHANISM .....	17
<b>CLAUSE 3 RELATED ITEMS</b> .....	<b>18</b>
TRANSACTION SYSTEM PROPERTIES (ACID) .....	18
ATOMICITY .....	18
<i>Completed Transactions</i> .....	18
<i>Aborted Transactions</i> .....	18
CONSISTENCY.....	18
ISOLATION .....	18
DURABILITY .....	19
<i>Durable Media Failure</i> .....	19
<i>Instantaneous Interruption and Loss of Memory</i> .....	20
<b>CLAUSE 4 RELATED ITEMS</b> .....	<b>21</b>
INITIAL CARDINALITY OF TABLES .....	21

DATABASE LAYOUT .....	21
TYPE OF DATABASE.....	22
DATABASE MAPPING.....	22
60 DAY SPACE.....	22
<b>CLAUSE 5 RELATED ITEMS .....</b>	<b>23</b>
THROUGHPUT .....	23
KEYING AND THINK TIMES.....	23
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS .....	24
STEADY STATE DETERMINATION .....	29
WORK PERFORMED DURING STEADY STATE.....	29
MEASUREMENT PERIOD DURATION.....	29
REGULATION OF TRANSACTION MIX .....	30
TRANSACTION STATISTICS .....	30
CHECKPOINT COUNT AND LOCATION .....	31
CHECKPOINT DURATION.....	31
<b>CLAUSE 6 RELATED ITEMS .....</b>	<b>32</b>
RTE DESCRIPTIONS .....	32
EMULATED COMPONENTS .....	32
FUNCTIONAL DIAGRAMS .....	32
NETWORKS .....	32
OPERATOR INTERVENTION .....	32
<b>CLAUSE 7 RELATED ITEMS .....</b>	<b>33</b>
SYSTEM PRICING .....	33
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE.....	33
COUNTRY SPECIFIC PRICING.....	33
USAGE PRICING .....	33
<b>CLAUSE 9 RELATED ITEMS .....</b>	<b>34</b>
AUDITOR'S REPORT.....	34
AVAILABILITY OF THE FULL DISCLOSURE REPORT.....	34
<b>APPENDIX A: SOURCE CODE .....</b>	<b>A-1</b>
<b>APPENDIX B: DATABASE DESIGN .....</b>	<b>B-1</b>
<b>APPENDIX C: TUNABLE PARAMETERS .....</b>	<b>C-1</b>
<b>APPENDIX D: 60-DAY SPACE .....</b>	<b>D-1</b>
<b>APPENDIX E: THIRD PARTY QUOTES .....</b>	<b>E-1</b>

# Preface

---

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.9.

## TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

# *Abstract*

---

## **Overview**

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant ML370 G5. The operating system used for the benchmark was Windows Server 2003, Enterprise (x64) Edition R2. The DBMS used was Microsoft SQL Server 2005 Enterprise (x64) Edition (SP2).

## **TPC Benchmark C Metrics**

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

275,149 tpmC  
USD \$1.44 per tpmC

The availability date is January 7, 2008.


## **Standard and Executive Summary Statements**

The following pages contain executive summary of results for this benchmark.

## **Auditor**

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

<b>Hewlett-Packard</b>  <b>Company</b>		HP ProLiant ML370 G5 SAS Intel X5460 QC		TPC-C Rev. 5.9					
		C/S with 8 HP ProLiant DL360G5		Report Date: Jan. 7, 2008					
Total System Cost		TPC-C Throughput		Price/Performance		Availability Date			
<b>USD \$395,397</b>		<b>275,149</b>		<b>USD \$1.44</b>		<b>Jan. 7, 2008</b>			
Database Server Processors /Cores/Threads		Database Manager		Operating System		Other Software		Number of Users	
2/8/8 Intel X5460 3.16GHz QC		Microsoft SQL Server 2005 Enterprise x64 Edition SP2		Windows Server 2003 R2 Enterprise x64 Edition		Microsoft Visual C++ Microsoft COM+		<b>220,800</b>	

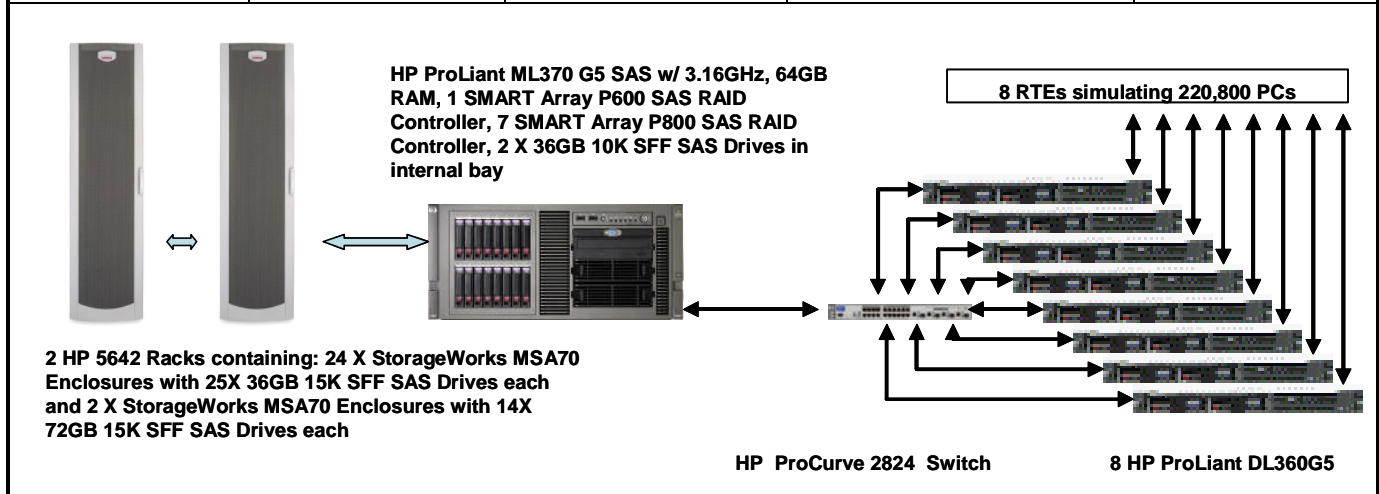

System Components	Server		Each Client	
	Quantity	Description	Quantity	Description
Processors/Cores/Threads	2/8/8	3.16GHz Intel X5460 QC w/ 12M Cache	1/2/2	1.6 GHz Intel X5110
Memory	8	8 GB DDR (2 X 4 GB)	2	1024 MB
Disk Controllers	1 7	Smart P600 Controller Smart P800 Controller	1	Integrated Smart Array P400i Controller
Disk Drives	28 600 2	72GB 15K SFF SAS Drives (log) 36 GB 15K SFF SAS Drives (data) 36 GB 10K SFF SAS Drives (internal, O/S)	2	36GB 10K SFF SAS Drives
Total Storage		22,265 GB		72 GB

Hewlett-Packard Company	HP ProLiant ML370 G5 SAS		TPC-C Rev. 5.9			
	Intel X5460 QC Client/Server		Report Date	7-Jan-08		
Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price
<b>Server Hardware</b>						
		<b>Brand Pricing</b>				
HP ML370 G5 Rack SAS MOD-FX Svr	400606-B21		1,643	1	1,643	
HP 3.16GHz/1333MHz X5460, 120W processor kit	458408-B21		1,699	2	3,398	
8GB FBD PC2-5300 2 x 4GB Kit	397415-B21		2,149	8	17,192	
HP ML370 G5 Mem. Board Kit	403766-B21		179	1	179	
HP Smart Array P800/512MB SAS Controller	381513-B21		1,099	7	7,693	
HP Smart Array P600 3G SAS/SATA RAID Controller	337972-B21		729	1	729	
HP s7540 17in. CRT Monitor	PF997AA#ABA		139	1	139	
HP PS/2 Scroll Mouse	AH036AV		5	1	5	
HP PS/2 Standard Keyboard	DZ204AV#ABA		5	1	5	
HP 5642 Pallet Unassembled Rack	358254-B21		865	2	1,730	
HP R/T2200 5-20P NA UPS	AF409A		849	1	849	
HP 36GB 15k 2.5 Single Port HP SAS Drive	431933-B21		349	600	209,400	
HP 36GB 15k 2.5 Single Port HP SAS Drive (10% Spares)	431933-B21		349	60		20,940
HP 72GB 15k 2.5 Single Port HP SAS Drive	431935-B21		479	28	13,412	
HP 72GB 15k 2.5 Single Port HP SAS Drive (10% Spares)	431935-B21		479	3		1,437
HP 36GB 10K SAS 2.5 Hot Plug Hard Drive	375859-B21		269	2	538	
HP StorageWorks MSA-70 Storage	418800-B21		3,199	26	83,174	
HP StorageWorks MSA-70 Storage (10% Spares)	418800-B21		3,199	3		9,597
HP CPe 3Y 4H 24x7 HW ProLiant ML370	U4529E		853	1		853
					<b>Subtotal</b>	<b>32,827</b>
					<b>340,086</b>	
<b>Server Software</b>						
Microsoft SQL Server 2005 Enterprise X64 Edition(per processor)	810-03150	Microsoft	23,911	2	47,822	Incl Below
Microsoft Visual Studio Standard 2005	127-00012	Microsoft	250	1	250	Incl Below
Microsoft Windows 2003 Server R2, Enterprise Edition X64	P72-01684	Microsoft	2,334	1	2,334	Incl Below
Microsoft Problem Resolution Services		Microsoft	245	1		245
					<b>Subtotal</b>	<b>245</b>
					<b>50,406</b>	
<b>Client Hardware</b>						
HP DL360G5 X5110 1GB, iLo2	416559-001	S1	1,959	8	15,672	
Dual Integrated Gigabit NIC, Integrated Smart Array Controller						
HP 1GB FBD PC2-5300 2x512 Kit	397409-B21		199	8	1,592	
HP s7540 17in. CRT Monitor	PF997AA#ABA		139	1	139	
HP PS/2 Scroll Mouse	AH036AV		5	1	5	
HP PS/2 Standard Keyboard	DZ204AV#ABA		5	1	5	
IOGEAR GCS78KIT 8-Port KVM Switch Kit , PS/2, w/KVM Cables	N82E16817107458		200	3	600	
HP 36GB 10K SAS 2.5 Hot Plug Hard Drive	375859-B21		269	16	4,304	
HP CP 3Y 4H 24x7 HW Entry300 4-Hour 24 Hour x 7 Day Coverage 3 Years	162675-002		599	8		4,792
					<b>Subtotal</b>	<b>4,792</b>
					<b>22,317</b>	
<b>Client Software</b>						
Windows Server 2003 R2, Standard Edition	P73-01972	Microsoft	719	8	5,752	Incl. Above
					<b>Subtotal</b>	<b>0</b>
					<b>5,752</b>	
<b>User Connectivity</b>						
HP ProCurve Switch 2824	J4903A#ABA		2499	1	2,499	
HP CP for HP ProCurve Networking products 3 Yr 4 hr/24x7	U2856E		1000	1		1,000
5 foot Cat5E Non Booted Network Patch Cables	cblc5enb5gn		3	10	30	
5 foot Cat5E Non Booted Network Patch Cables (plus 10% spares)	cblc5enb5gn		3	2		6
					<b>Subtotal</b>	<b>1,006</b>
					<b>2,529</b>	
Large Purchase and Net 30 discount (See Note 1)	16.0%				<b>(\$58,384)</b>	<b>(\$6,179)</b>
					<b>Total</b>	<b>\$32,691</b>
					<b>\$362,706</b>	
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.				<b>Three-Year Cost of Ownership: USD \$395,397</b>		
				<b>tpmC Rating: 275,149</b>		
				<b>\$/ tpmC: USD \$1.44</b>		
Pricing: 1=HP Direct 800-203-6748 2= Microsoft 3= LanAdapters.com 4=newegg.com						
Note 1 = Discount based on HP Direct guidance applies to all lines where pricing = 1						
Note 2 = The benchmark results were audited by Lorna Livingtree of Performance Metrics						
One or more components of the measured configuration have been substituted in the Priced Configuration. See FDR for details.						



## Numerical Quantities Summary

**MQTH, Computed Maximum Qualified Throughput**

**275,149 tpmC**

<b>Response Times (in seconds)</b>	<b>Average</b>	<b>90%</b>	<b>Maximum</b>
New-Order	0.34	0.70	8.09
Payment	0.31	0.66	8.02
Order-Status	0.33	0.68	8.10
Delivery (interactive portion)	0.13	0.16	6.35
Delivery (deferred portion)	0.13	0.18	5.19
Stock-Level	0.35	0.70	7.66
Menu	0.13	0.17	6.38

### **Transaction Mix, in percent of total transaction**

New-Order	44.92%
Payment	43.04%
Order-Status	4.03%
Delivery	4.01%
Stock-Level	4.01%

### **Emulation Delay (in seconds)**

**Resp.Time      Menu**

New-Order	0.10	0.10
Payment	0.10	0.10
Order-Status	0.10	0.10
Delivery (interactive)	0.10	0.10
Stock-Level	0.10	0.10

### **Keying/Think Times (in seconds)**

**Min.      Average      Max.**

New-Order	18.02/0.00	18.03/12.06	19.16/121.74
Payment	3.02/0.00	3.03/12.06	4.17/121.74
Order-Status	2.02/0.00	2.03/10.04	3.16/101.53
Delivery (interactive)	2.02/0.00	2.03/5.07	3.16/51.03
Stock-Level	2.02/0.00	2.03/5.07	3.12/51.03

### **Test Duration**

Ramp-up time	45 minutes
Measurement interval	120 minutes
Transactions (all types) completed during measurement interval	76,126,300
Ramp down time	16 minutes

### **Checkpointing**

Number of checkpoints	4
Checkpoint interval	30 minutes

# General Items

---

## Test Sponsor

*A statement identifying the benchmark sponsor(s) and other participating companies must be provided.*

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

## Application Code and Definition Statements

*The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.*

Appendix A contains all source code implemented in this benchmark.

## Parameter Settings

*Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including but not limited to:*

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

*This requirement can be satisfied by providing a full list of all parameters.*


Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

## Configuration Items


*Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.*

The configuration diagram for both the tested and priced systems are included on the following page.

**Figure 1. Benchmarked Configuration**

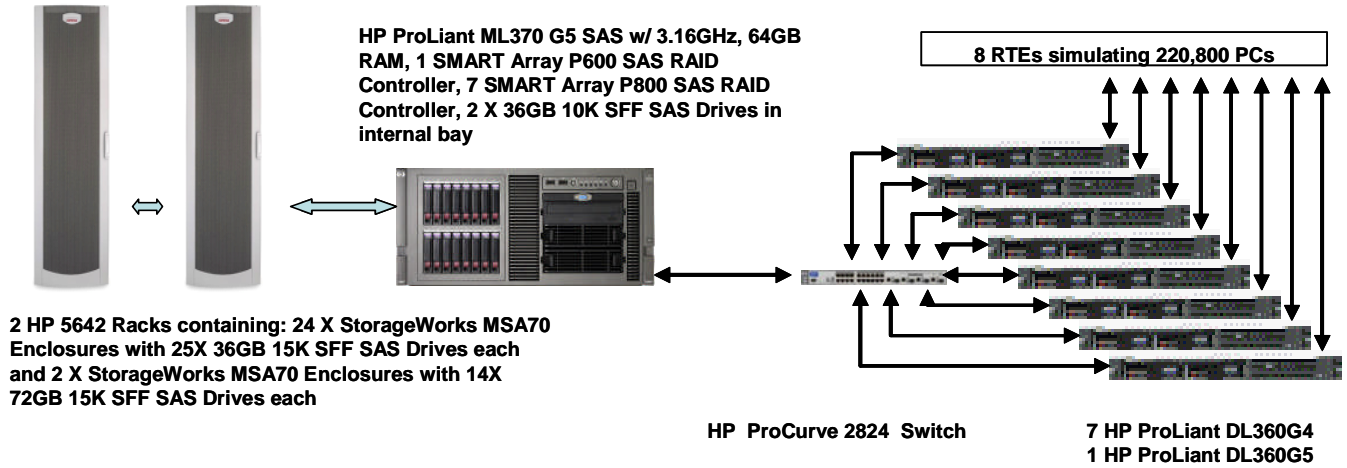

**Figure 2. Priced Configuration**

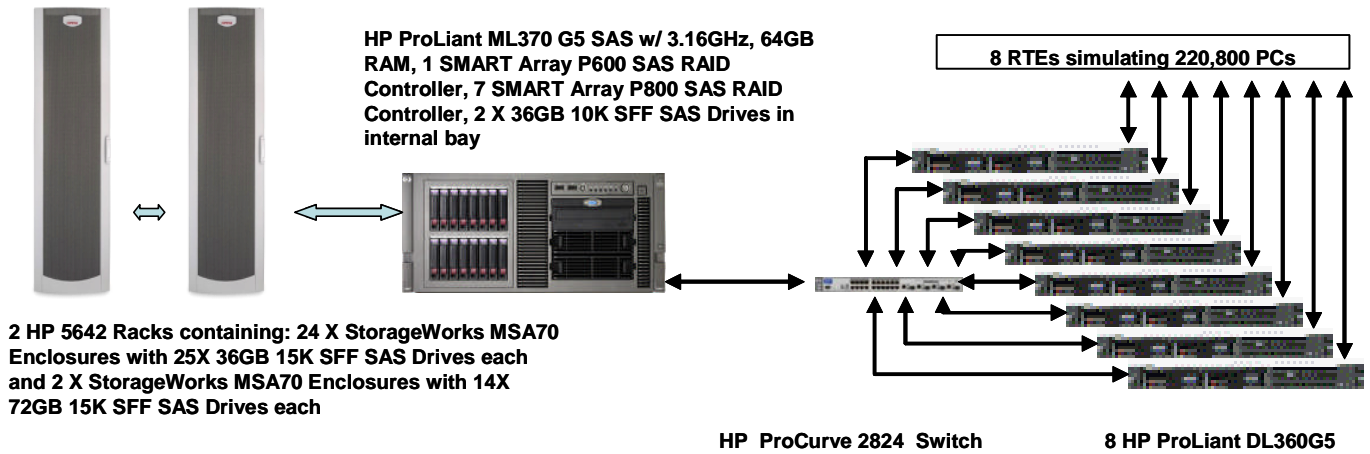

# Clause 1 Related Items

---

## Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

## Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of 600 drives at 36GB for database data, two 36GB drives for the operating system, and 28 drives at 72GB for database log. There were 600 X 36GB drives for database data on six Smart Array P800 controllers, 28 X 72GB drives for database log on a Smart Array P800 controller, and 2 X 36GB drives on a Smart Array P600 controller for the Operating System.

## Benchmarked Configuration:

### Smart Array P800 Controller, Slot 5, Array A

<u>LOGICAL DRIVE C:\tpcc\cust\cust 5:</u> Cust_fg	<u>Total Capacity = 45.89GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\stock\stock 5:</u> Stock_fg	<u>Total Capacity = 63.67GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\ordln\ordln 5:</u> Ordln_fg	<u>Total Capacity = 54.19GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\misc\misc 5:</u> Misc_fg	<u>Total Capacity = 7.37GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE Y:</u> TpccBackup5	<u>Total Capacity = 761.60GB</u>	<u>RAID 0+1</u>

### Smart Array P800 Controller, Slot 5, Array B

<u>LOGICAL DRIVE C:\tpcc\cust\cust 6:</u> Cust_fg	<u>Total Capacity = 45.89GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\stock\stock 6:</u> Stock_fg	<u>Total Capacity = 63.67GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\ordln\ordln 6:</u> Ordln_fg	<u>Total Capacity = 54.19GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\misc\misc 6:</u> Misc_fg	<u>Total Capacity = 7.37GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE Z:</u> TpccBackup6	<u>Total Capacity = 761.60GB</u>	<u>RAID 0+1</u>

### Smart Array P800 Controller, Slot 4, Array A

<u>LOGICAL DRIVE C:\tpcc\cust\cust 3:</u> Cust_fg	<u>Total Capacity = 45.89GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\stock\stock 3:</u> Stock_fg	<u>Total Capacity = 63.67GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\ordln\ordln 3:</u> Ordln_fg	<u>Total Capacity = 54.19GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\misc\misc 3:</u> Misc_fg	<u>Total Capacity = 7.37GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE W:</u> TpccBackup3	<u>Total Capacity = 761.60GB</u>	<u>RAID 0+1</u>

**Smart Array P800 Controller, Slot 4, Array B**

<u>LOGICAL DRIVE C:\tpcc\cust\cust_4:</u> Cust_fg	<u>Total Capacity = 45.89GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\stock\stock_4:</u> Stock_fg	<u>Total Capacity = 63.67GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\ordln\ordln_4:</u> Ordln_fg	<u>Total Capacity = 54.19GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\misc\misc_4:</u> Misc_fg	<u>Total Capacity = 7.37GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE X:</u> TpccBackup4	<u>Total Capacity = 761.60GB</u>	<u>RAID 0+1</u>

**Smart Array P800 Controller, Slot 1, Array A**

<u>LOGICAL DRIVE C:\tpcc\cust\cust_1:</u> Cust_fg	<u>Total Capacity = 45.89GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\stock\stock_1:</u> Stock_fg	<u>Total Capacity = 63.67GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\ordln\ordln_1:</u> Ordln_fg	<u>Total Capacity = 54.19GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\misc\misc_1:</u> Misc_fg	<u>Total Capacity = 7.37GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE U:</u> TpccBackup1	<u>Total Capacity = 761.60GB</u>	<u>RAID 0+1</u>

**Smart Array P800 Controller, Slot 1, Array B**

<u>LOGICAL DRIVE C:\tpcc\cust\cust_2:</u> Cust_fg	<u>Total Capacity = 45.89GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\stock\stock_2:</u> Stock_fg	<u>Total Capacity = 63.67GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\ordln\ordln_2:</u> Ordln_fg	<u>Total Capacity = 54.19GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\misc\misc_2:</u> Misc_fg	<u>Total Capacity = 7.37GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE V:</u> TpccBackup2	<u>Total Capacity = 761.60GB</u>	<u>RAID 0+1</u>

**Smart Array P800 Controller, Slot 9, Array A**

<u>LOGICAL DRIVE F:</u> Tpcc_log	<u>Total Capacity = 956.68GB</u>	<u>RAID 0+1</u>
-------------------------------------	----------------------------------	-----------------

**Smart Array P800 Controller, Slot 8, Array A**

<u>LOGICAL DRIVE C:\tpcc\cust\cust_11:</u> Cust_fg	<u>Total Capacity = 45.89GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\stock\stock_11:</u> Stock_fg	<u>Total Capacity = 63.67GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\ordln\ordln_11:</u> Ordln_fg	<u>Total Capacity = 54.19GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\misc\misc_11:</u> Misc_fg	<u>Total Capacity = 7.37GB</u>	<u>RAID 0</u>

**Smart Array P800 Controller, Slot 8, Array B**

<u>LOGICAL DRIVE C:\tpcc\cust\cust_12:</u> Cust_fg	<u>Total Capacity = 45.89GB</u>	<u>RAID 0</u>
<u>LOGICAL DRIVE C:\tpcc\stock\stock_12:</u>	<u>Total Capacity = 63.67GB</u>	<u>RAID 0</u>

Stock\_fg  
LOGICAL DRIVE C:\tpcc\ordln\ordln\_12: Total Capacity = 54.19GB      RAID 0  
 Ordln\_fg  
LOGICAL DRIVE C:\tpcc\misc\misc\_12: Total Capacity = 7.37GB      RAID 0  
 Misc\_fg

**Smart Array P800 Controller, Slot 7, Array A**

LOGICAL DRIVE C:\tpcc\cust\cust\_9: Total Capacity = 45.89GB      RAID 0  
 Cust\_fg  
LOGICAL DRIVE C:\tpcc\stock\stock\_9: Total Capacity = 63.67GB      RAID 0  
 Stock\_fg  
LOGICAL DRIVE C:\tpcc\ordln\ordln\_9: Total Capacity = 54.19GB      RAID 0  
 Ordln\_fg  
LOGICAL DRIVE C:\tpcc\misc\misc\_9: Total Capacity = 7.37GB      RAID 0  
 Misc\_fg

**Smart Array P800 Controller, Slot 7, Array B**

LOGICAL DRIVE C:\tpcc\cust\cust\_10: Total Capacity = 45.89GB      RAID 0  
 Cust\_fg  
LOGICAL DRIVE C:\tpcc\stock\stock\_10: Total Capacity = 63.67GB      RAID 0  
 Stock\_fg  
LOGICAL DRIVE C:\tpcc\ordln\ordln\_10: Total Capacity = 54.19GB      RAID 0  
 Ordln\_fg  
LOGICAL DRIVE C:\tpcc\misc\misc\_10: Total Capacity = 7.37GB      RAID 0  
 Misc\_fg

**Smart Array P800 Controller, Slot 6, Array A**

LOGICAL DRIVE C:\tpcc\cust\cust\_7: Total Capacity = 45.89GB      RAID 0  
 Cust\_fg  
LOGICAL DRIVE C:\tpcc\stock\stock\_7: Total Capacity = 63.67GB      RAID 0  
 Stock\_fg  
LOGICAL DRIVE C:\tpcc\ordln\ordln\_7: Total Capacity = 54.19GB      RAID 0  
 Ordln\_fg  
LOGICAL DRIVE C:\tpcc\misc\misc\_7: Total Capacity = 7.37GB      RAID 0  
 Misc\_fg

**Smart Array P800 Controller, Slot 6, Array B**

LOGICAL DRIVE C:\tpcc\cust\cust\_8: Total Capacity = 45.89GB      RAID 0  
 Cust\_fg  
LOGICAL DRIVE C:\tpcc\stock\stock\_8: Total Capacity = 63.67GB      RAID 0  
 Stock\_fg  
LOGICAL DRIVE C:\tpcc\ordln\ordln\_8: Total Capacity = 54.19GB      RAID 0  
 Ordln\_fg  
LOGICAL DRIVE C:\tpcc\misc\misc\_8: Total Capacity = 7.37GB      RAID 0  
 Misc\_fg

**Smart Array P600 Controller, Slot 2, Array A**

LOGICAL DRIVE C:\      Total Capacity = 33.88GB      RAID 1  
 Operating System

**Priced Configuration vs. Measured Configuration:**

The benchmarked configuration used (7) HP ProLiant DL360G4 servers and (1) HP ProLiant DL360G5 server for clients. The priced configuration used all HP ProLiant DL360G5 servers. The validity of the substitution was verified on a previous benchmark using 7 ProLiant DL360G4 clients and 1 ProLiant

DL360G5 client. The performance run was executed and a transaction report was generated for the users on each client. The transaction report showed that the response times and transaction rate were superior on the representative DL360G5 client.

### **Insert and Delete Operations**

*It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.*

All insert and delete functions were fully operational during the entire benchmark.

### **Partitioning**

*While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.*

No partitioning was used in this benchmark.

### **Replication, Duplication or Additions**

*Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.*

No replications, duplications or additional attributes were used in this benchmark.

# Clause 2 Related Items

---

## **Random Number Generation**

*The method of verification for the random number generation must be described.*

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none was found.

## **Input/Output Screen Layout**

*The actual layout of the terminal input/output screens must be disclosed.*

All screen layouts followed the specifications exactly.

## **Priced Terminal Feature Verification**

*The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).*

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

## **Presentation Manager or Intelligent Terminal**

*Any usage of presentation managers or intelligent terminals must be explained.*

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.



## Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

**Table 2.1 Transaction Statistics**

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	84.99%
	Remote warehouse payments	15.01%
	Accessed by last name	59.99%
Order Status	Accessed by last name	59.97%
Transaction Mix	New Order	44.92%
	Payment	43.04%
	Order status	4.03%
	Delivery	4.01%
	Stock level	4.01%

## Queuing Mechanism

*The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.*

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

# Clause 3 Related Items

---

## Transaction System Properties (ACID)

*The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.*

All ACID property tests were successful. The executions are described below.

### Atomicity

*The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.*

#### Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

#### Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

### Consistency

*Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.*

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included 4 checkpoints.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

### Isolation

*Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.*

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

## Durability

*The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.*

### Durable Media Failure

#### Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed. This test was executed on a fully scaled database of 22600 warehouses of which 2240 were used under a load of 22400 users.

- The total number of New Orders was determined by the sum of D\_NEXT\_O\_ID of all rows in the DISTRICT table giving the beginning count.
- The RTEs were started with 22400 users.
- The test was allowed to run for a minimum of 10 minutes.
- One disk was removed from one of the StorageWorks MSA70 cabinets containing the log disks.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the user's status on the RTE.
- One of the data disks was removed from one StorageWorks MSA70 data drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down, and a database transaction log dump was taken.
- Microsoft SQL Server was shutdown, and the system rebooted after replacing the pulled drives with new drives.
- Microsoft SQL Server was started.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in steps 12 and 13 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

## **Instantaneous Interruption and Loss of Memory**

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 22600 warehouses under a full load of 220,800 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D\_NEXT\_O\_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 220,800 users.
- The test was allowed to run for a minimum of 10 minutes.
- Pulling the power cords from the SUT induced system crash and loss of memory. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was paused then stopped.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 9 and 10 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

# Clause 4 Related Items

---

## Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

**Table 4.1 Number of Rows for Server**

Table	Cardinality as built
Warehouse	22,600
District	226,000
Customer	678,000,000
History	678,000,000
Orders	678,000,000
New Order	203,400,000
Order Line	6,779,978,210
Stock	2,260,000,000
Item	100,000
Unused Warehouses	520

## Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 600 SAS drives at 36GB for database data, two 36GB SAS drives for the operating system, and 28 SAS drives at 72GB for database log.

For database data, six Smart Array P800 controllers connected to 4 StorageWorks MSA70 drive boxes each (2 StorageWorks MSA70's on each of two ports of the controller configured as an array). Each StorageWorks MSA70 contained (25) 36GB SAS drives. Each array had two RAID 0 logical drives for data, and three of the controllers also contained RAID 0+1 logical drives for database backup files.

For database log, two StorageWorks MSA70's containing 14 72GB drives each were connected to a Smart Array P800 controller. This was configured as an array with one RAID 0+1 logical drive for the database log.

The Smart Array P600 controller was connected to the internal drive cage which contained 2 X 36GB SAS drives configured as a RAID 0+1 logical drive. The Array Accelerators on the data controllers were configured as 100% write cache and were enabled for all logical drives containing “ordln” and “misc” file groups. The Smart Array P800 connected to the transaction log had cache disabled. All RAID volumes used hardware RAID.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the file groups and tables is included in Appendix B.

## Type of Database

*A statement must be provided that describes:*

- *The data model implemented by DBMS used (e.g. relational, network, hierarchical).*
- *The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/I, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2005 Enterprise (x64) Edition is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

## Database Mapping

*The mapping of database partitions/replications must be explicitly described.*

The database was not replicated.

## 60 Day Space

*Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.*

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using *dbcc sqlperf(logspace)*.
- Transactions were run against the database with a full load of users.
- The free space was again queried using *dbcc sqlperf(logspace)*.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the sum(d\_next\_o\_id) taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

Details of both the 8-hour transaction log space requirements and the 60-day space requirements are shown in Appendix D.

# Clause 5 Related Items

---

## Throughput

*Measured tpmC must be reported*

Measured tpmC 275,149tpmC  
Price per tpmC USD \$1.44

## Response Times

*Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.*

**Table 5.2: Response Times**

Type	Average	90 <sup>th</sup> %	Maximum
New-Order	0.34	0.70	8.09
Payment	0.31	0.66	8.02
Order-Status	0.33	0.68	8.10
Interactive Delivery	0.13	0.16	6.35
Deferred Delivery	0.13	0.18	5.19
Stock-Level	0.35	0.70	7.66
Menu	0.13	0.17	6.38

## Keying and Think Times

*The minimum, the average, and the maximum keying and think times must be reported for each transaction type.*

**Table 5.3: Keying Times**

Type	Minimum	Average	Maximum
New-Order	18.02	18.03	19.16
Payment	3.02	3.03	4.17
Order-Status	2.02	2.03	3.16
Interactive Delivery	2.02	2.03	3.16
Stock-Level	2.02	2.03	3.12

**Table 5.4: Think Times**

Type	Minimum	Average	Maximum
New-Order	0.00	12.06	121.74
Payment	0.00	12.06	121.74
Order-Status	0.00	10.04	101.53
Interactive Delivery	0.00	5.07	51.03
Stock-Level	0.00	5.07	51.03

**Response Time Frequency Distribution Curves and Other Graphs**

*Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.*

*The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.*


*Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.*

*Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.*


*A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.*




**Figure 3. New Order Response Time Distribution**

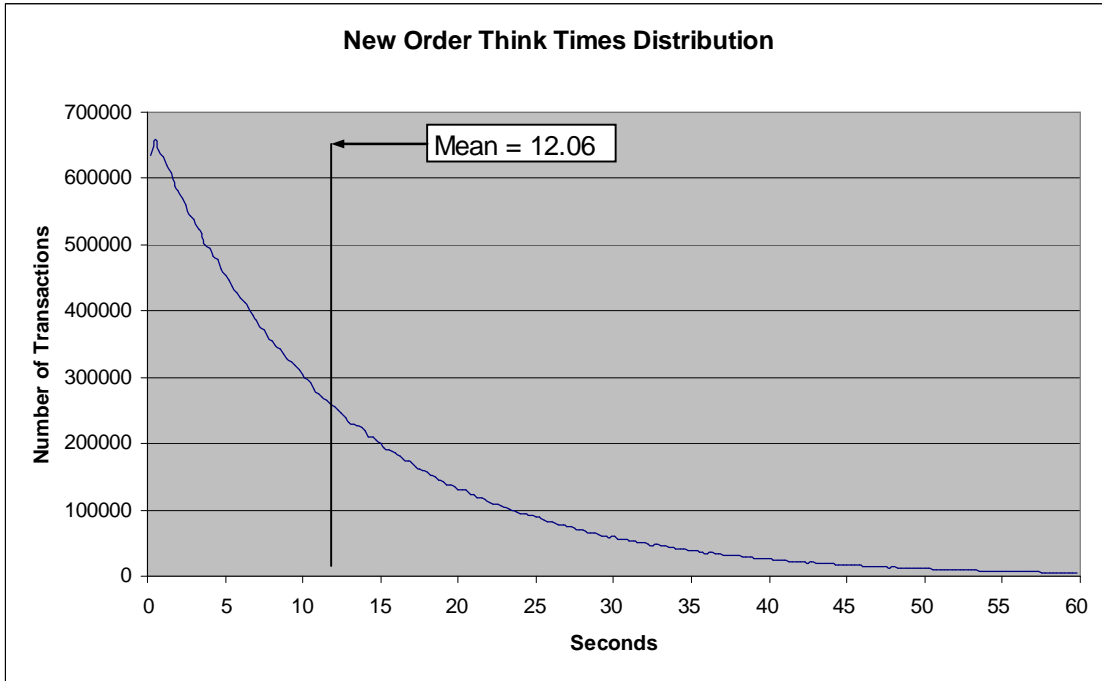


**Figure 4. Payment Response Time Distribution**

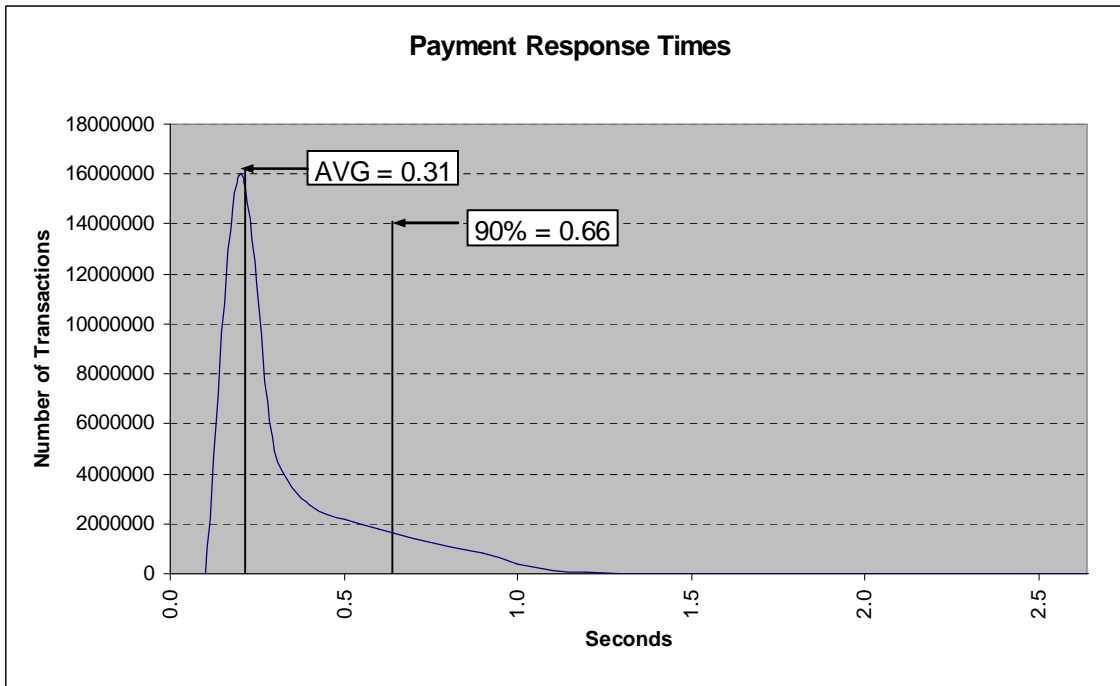


**Figure 5. Order Status Response Time Distribution**

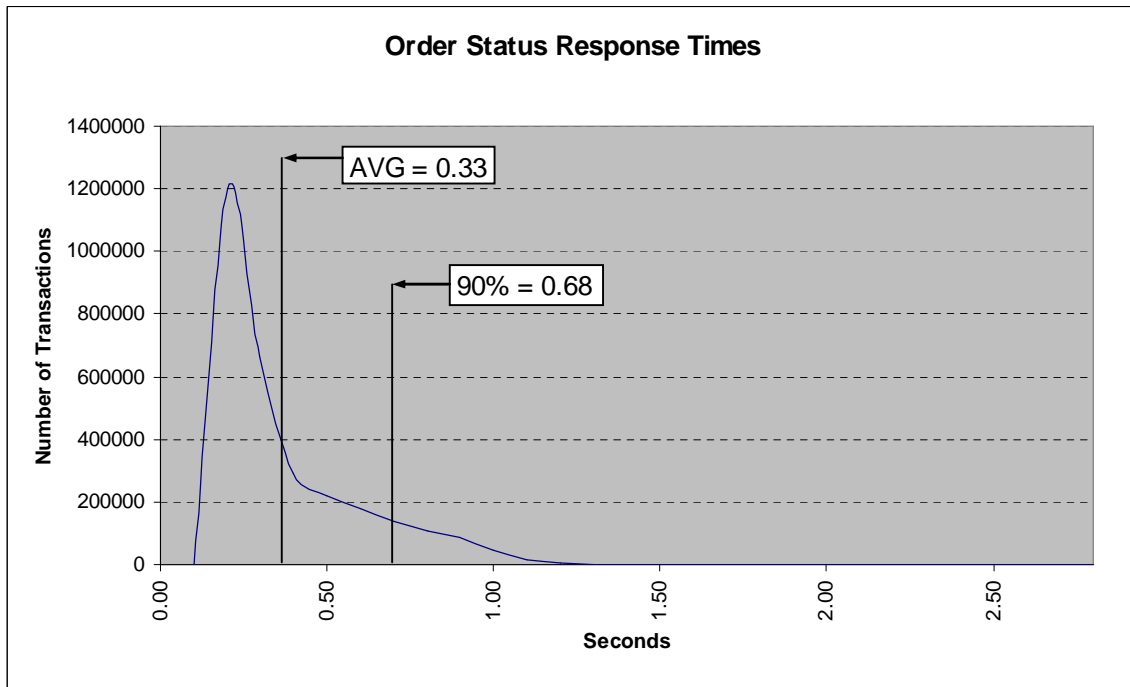


**Figure 6. Delivery Response Time Distribution**

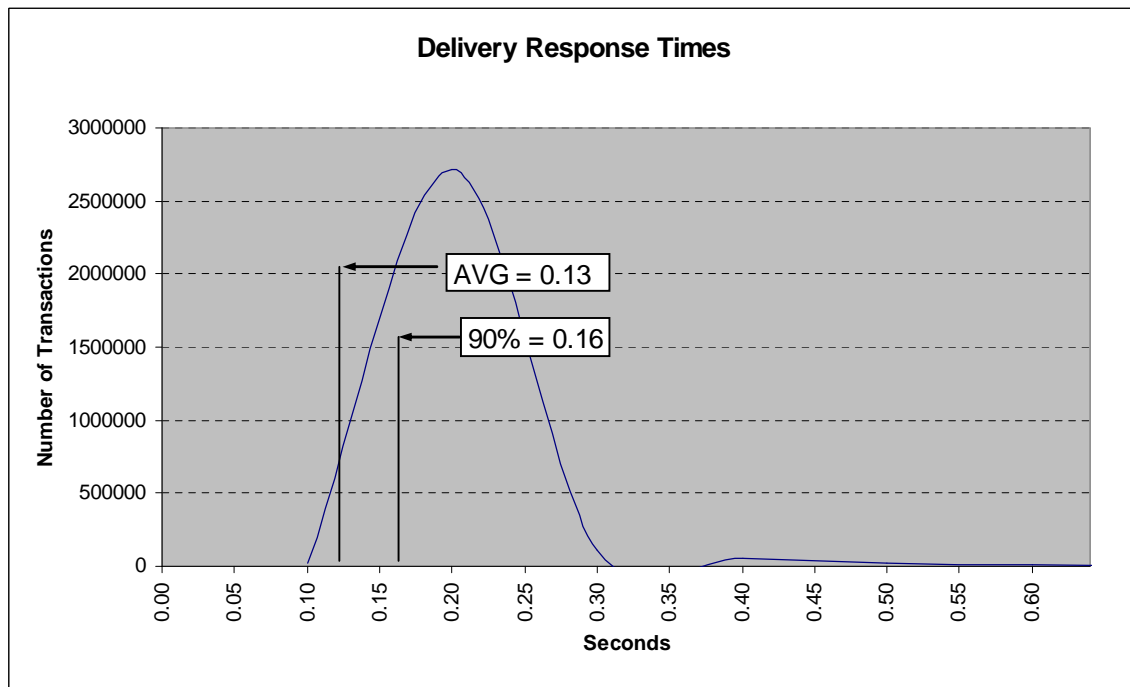

**Figure 7. Stock Level Response Time Distribution**

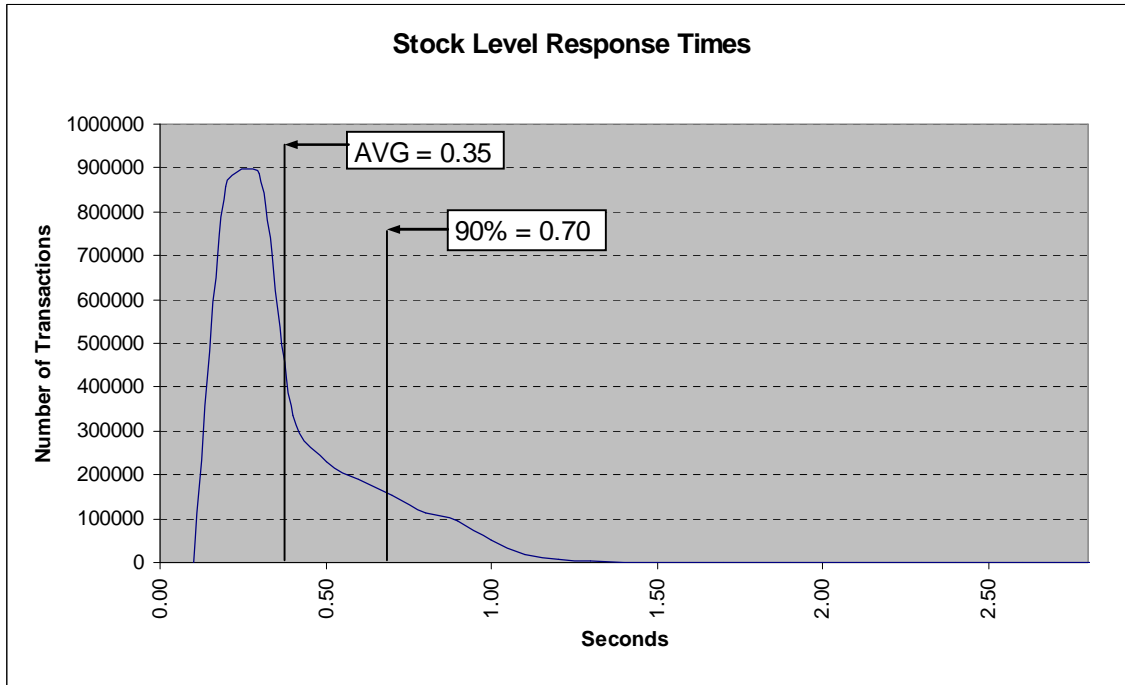


**Figure 8. Response Time vs. Throughput**

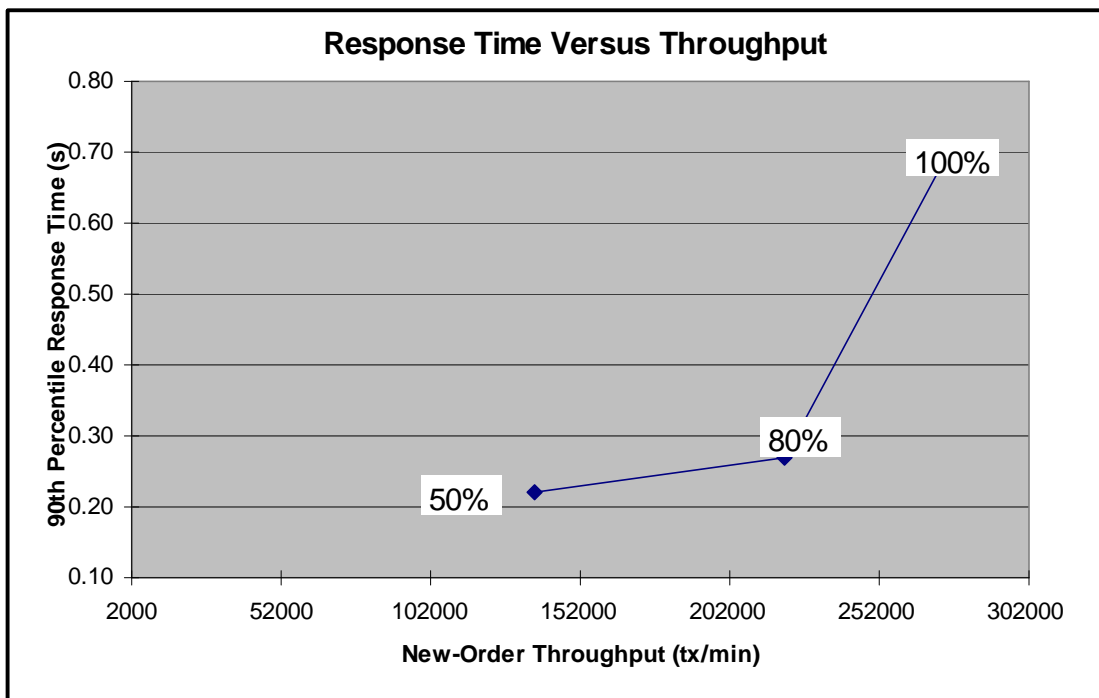

**Figure 9. New Order Think Time Distribution**



**Figure 10. Throughput vs. Time Distribution**

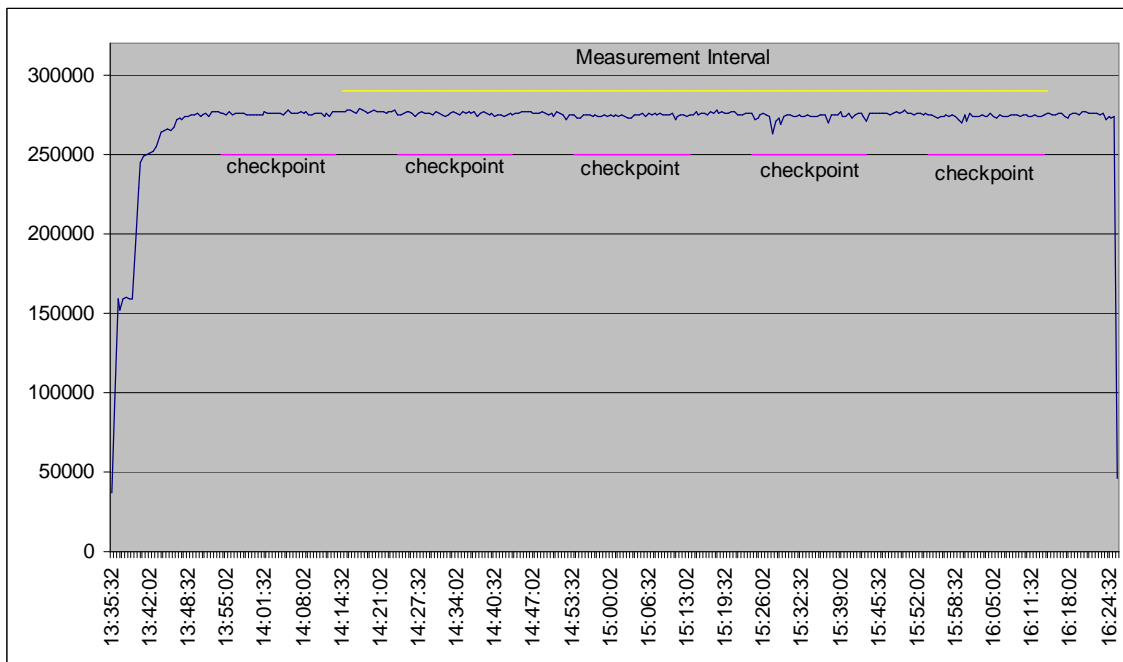

## Steady State Determination

*The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.*

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

## Work Performed During Steady State

*A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.*

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The input screen for the requested transaction was returned and timestamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over gigabit Ethernet LANs using ODBC and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 32767 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes. The measurement interval was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 10.

## Measurement Period Duration

*A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.*

The reported measured interval was exactly 120 minutes long.

## Regulation of Transaction Mix

*The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.*

The RTE was given a weighted random distribution, which was not adjusted during the run.

## Transaction Statistics

*The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.*

**Table 5.5: Transaction Statistics**

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	84.99%
	Remote warehouse payments	15.01%
	Accessed by last name	59.99%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	59.97%
Transaction Mix	New Order	44.92%
	Payment	43.04%
	Order status	4.03%
	Delivery	4.01%
	Stock level	4.01%

## Checkpoint Count and Location

*The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.*

The initial checkpoint was started 45 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. Each checkpoint in the measurement interval lasted 20 minutes. The measurement interval contains four checkpoints.

## Checkpoint Duration

*The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.*

Checkpoint Start Time	Duration
2:23:27.40 pm	20 minutes
2:53:44.42 pm	20 minutes
3:23:41.46 pm	20 minutes
3:53:38.48 pm	20 minutes

# Clause 6 Related Items

---

## RTE Descriptions

*If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.*

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input is listed in Appendix A.

## Emulated Components

*It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.*

The driver system consisted of 8 HP ProLiant servers. These driver machines emulated the users' web browsers.

## Functional Diagrams

*A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.*

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

## Networks

*The network configuration of both the tested services and proposed (target) services that are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.*

*The bandwidth of the networks used in the tested/priced configuration must be disclosed.*

In the tested configuration, 8 driver (RTE) machines were connected through a gigabit Ethernet switch to the client machines at 1Gbps, thus providing the path from the RTEs to the clients. The server (SUT) was connected to the clients through a gigabit Ethernet switch on a separate LAN.

The priced configuration was connected in the same manner as the tested configuration.

## Operator Intervention

*If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.*

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.



# Clause 7 Related Items

---

## System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

## Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

- **Maximum Qualified Throughput**                      **275,149tpmC**
- **Price per tpmC**    **USD \$1.44 per tpmC**
- **Availability**    **January 7, 2008**

## Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

## Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 8 Microsoft Windows Server 2003 Standard Edition R2
- 1 Microsoft Windows Server 2003 Enterprise x64 Edition R2
- 1 Microsoft SQL Server 2005 Enterprise x64 Edition (per processor) (SP2)
- Microsoft Visual Studio 2005
- HP Servers include 3 years of support.

# Clause 9 Related Items

---

## **Auditor's Report**

*The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.*

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.  
PO Box 984  
Klamath CA 95548  
(phone) 707-482-0523  
(fax) 707-482-0575  
e-mail: lornaL@perfmetrics.com

## **Availability of the Full Disclosure Report**

*The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.*

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

TPC  
Presidio of San Francisco  
Building 572B Ruger St. (surface)  
P.O. Box 29920 (mail)  
San Francisco, CA 94129-0920

or

Hewlett-Packard Company  
Database Performance Engineering  
P.O. Box 692000  
Houston, TX 77269-2000



January 7, 2008

Mr. Brean Campbell  
 Hewlett-Packard Company  
 20555 SH 249  
 Houston, TX 77077

I have verified by remote the TPC Benchmark™ C for the following configuration:

Platform: HP ProLiant ML370 G5  
 Database Manager: Microsoft SQL Server 2005 Enterprise X64 Edition  
 Operating System: Microsoft Windows 2003 Server Enterprise X64 Edition  
 Transaction Monitor: COM+

System Under Test: HP ProLiant ML370 G5 with:				
CPU's	Memory	Disks (total)	90% Response	TpmC
2 Intel quad core @3.1GHz	Main: 64 GB	602 @36GB 28 @ 72GB	0.70	275,149
7 clients: DL360G4 each with:				
1 Intel Xeon @3.6 GHz	Main: 1 GB	2 @ 36GB	Na	Na
1 clients: DL360G5 each with:				
2 Intel dual core Xeon @1.6 GHz	Main: 2 GB	2 @ 36GB	Na	Na

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized.
- The database was properly scaled with 22,600 warehouses, 22,080 of which were active during the measured interval.
- The ACID properties were successfully demonstrated.
- Data loss durability was demonstrated on a subset of the SUT configured with a database properly populated for 2,240 warehouses.

- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 days space calculation was verified.
- The controller cache for the log disks was disabled.
- The steady state portion of the test was 120 minutes.
- One checkpoint was taken in steady state before the measured interval opened.
- Four checkpoints were completed inside the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.
- Client pricing was verified to be compliant with all requirements for substitution.

Auditor Notes:

None.

Sincerely,

A handwritten signature in cursive script that reads "Lorna Livingtree".

Lorna Livingtree  
Auditor

# Appendix A: Source Code

The client source code is listed below.

## dlldata.c

```
/*
*****
DllData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file
compile.

To completely reconstruct this file, delete it and
rerun MIDL
on all the IDL files in this DLL, specifying this
file for the
/dlldata command line option
*****
****/

#include <rpcproxy.h>

#ifdef __cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

#ifdef __cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */
```

## error.h

```
/*
FILE: ERROR.H
Microsoft
TPC-C Kit Ver. 4.20.000
Copyright
Microsoft, 1999
All Rights Reserved
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
PURPOSE: Header file for error exception
classes.
Change history:
4.20.000 - updated rev number to
match kit
4.21.000 - fixed bug: ~CBaseErr
needed to be declared virtual
*/

#pragma once

#ifndef _INC_STRING
#include <string.h>
#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int iError; //error id of message
    char szMsg[256]; //message to sent to browser
} SERRORMSG;

typedef enum _ErrorLevel
{
    ERR_FATAL_LEVEL = 1,
    ERR_WARNING_LEVEL = 2,
    ERR_INFORMATION_LEVEL = 3
} ErrorLevel;

#define ERR_TYPE_LOGIC -1 //logic error in program; internal error
#define ERR_SUCCESS 0 //success (a non-error error)
#define ERR_BAD_ITEM_ID 1 //expected abort record in txnRecord
```

```
#define ERR_TYPE_DELIVERY_POST 2 //expected delivery post failed
#define ERR_TYPE_WEBDDL 3 //tpcc web generated error
#define ERR_TYPE_SQL 4 //sql server generated error
#define ERR_TYPE_DBLIB 5 //dblib generated error
#define ERR_TYPE_ODBC 6 //odbc generated error
#define ERR_TYPE_SOCKET 7 //error on communication socket client rte
only
#define ERR_TYPE_DEADLOCK 8 //dblib and odbc only deadlock condition
#define ERR_TYPE_COM 9 //error from COM call
#define ERR_TYPE_TUXEDO 10 //tuxedo error
#define ERR_TYPE_OS 11 //operating system error
#define ERR_TYPE_MEMORY 12 //memory allocation error
#define ERR_TYPE_TPCC_ODBC 13 //error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB 14 //error from tpcc dblib txn module
#define ERR_TYPE_DELISRV 15 //delivery server error
#define ERR_TYPE_TXNLOG 16 //txn log error
#define ERR_TYPE_BCCONN 17 //Benchcraft connection class
#define ERR_TYPE_TPCC_CONN 18 //Benchcraft connection class
#define ERR_TYPE_ENCINA 19 //Encina error
#define ERR_TYPE_COMPONENT 20 //error from COM component
#define ERR_TYPE_RTE 21 //Benchcraft rte
```

```

#define ERR_TYPE_AUTOMATION
                22
                //Benchcraft automation errors
#define ERR_TYPE_DRIVER
                23
                //Driver engine errors
#define ERR_TYPE_RTE_BASE
                24
                //Framework errors
#define ERR_BUF_OVERFLOW
                25
                //Buffer overflow during receive
#define ERR_TYPE_SOAP_HTTP
                26
                //HTTP/SOAP dll generated error
#define ERR_TYPE_OLEDB
                27
                //OLE-DB generated error
#define ERR_TYPE_TPCC_OLEDB
                28
                //error from tpcc ole-db txn module
// TPC-W error types
#define ERR_TYPE_TPCW_CONN
                50
                //Benchcraft connection class
#define ERR_TYPE_TPCW_HTML
                51
                //error from TpcwHtml dll
#define ERR_TYPE_TPCW_USER
                52
                //error from TPC-W user class
#define ERR_TYPE_TPCW_ENG_BASE
                53
#define ERR_TYPE_TPCW_ENG_OS
                54
#define ERR_TYPE_HTML_RESP
                55
#define ERR_TYPE_TPCW_ODBC
                56
#define ERR_TYPE_SCHANNEL
                57
#define ERR_TYPE_THINK_LIST
                58
//----- end TPC-W -----
#define ERR_TYPE_XML_PROFILE
                59
// TPC-E error types
#define ERR_TYPE_TPCE_CONN
                60
                //TPC-E pipe connection errors
#define ERR_TYPE_TPCE_RTE
                61
                //TPC-E Rte errors
#define ERR_TYPE_TPCE_ENG_BASE
                62
                //Tpce Driver engine errors
#define ERR_TYPE_TPCE_ENG_OS
                63
                //Tpce Driver
engine system errors
//#define ERR_TYPE_TPCE_MEE_ENG_BASE
                64
                //Tpce MEE
Driver engine errors

```

```

//#define ERR_TYPE_TPCE_MEE_ENG_OS
                65
                //Tpce MEE
Driver engine system errors

#define ERR_INS_MEMORY
                "Insufficient Memory to continue."
#define ERR_UNKNOWN
                "Unknown error."
#define ERR_MSG_BUF_SIZE
                512
#define INV_ERROR_CODE
                -1
#define ERR_INS_BUF_OVERFLOW
                "Insufficient Buffer
size to receive HTML pages."

class CBaseErr
{
public:
    enum Action
    {
        eNone = 0
    };

    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg =
GetLastError(); //take the error code
immediately before it is reset by other functions

        if (szLoc)
        {
            m_szLoc = new
char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;

        m_szApp = new
char[m_szApp_size];

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
    {
        m_idMsg = idMsg;

        if (szLoc)
        {
            m_szLoc = new
char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;

```

```

        m_szApp = new
char[m_szApp_size];

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    virtual ~CBaseErr(void)
    {
        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };

    virtual void Draw(HWND hwnd, LPCTSTR szStr
= NULL)
    {
        int j = 0;
        char szTmp[512];

        if (szStr)
            j = wsprintf(szTmp,
"%s\n",szStr);
        if (ErrorNum() != INV_ERROR_CODE)
            j += wsprintf(szTmp+j,
"Error = %d\n", ErrorNum());
        if (m_szLoc)
            j += wsprintf(szTmp+j,
"Location = %s\n", GetLocation());
        j += wsprintf(szTmp+j, "%s\n",
ErrorText());
        MessageBox(hwnd, szTmp, m_szApp,
MB_OK);
    }

    char *GetApp(void) { return m_szApp; }
    char *GetLocation(void) { return m_szLoc; }
    virtual int ErrorNum() { return m_idMsg; }

    virtual int ErrorType() = 0; // a value
which distinguishes the kind of error that occurred
    virtual char *ErrorTypeStr() = 0; // text
representation of the error type
    virtual char *ErrorText() = 0; // a string
(i.e., human readable) representation of the error
    virtual int ErrorAction() { return eNone; }
    // the function call that caused the error

protected:
    char *m_szApp;
    char *m_szLoc; // code location where
the error
occurred
    int m_idMsg;

    //short m_errType;
};

```

```

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eSend,
        eSocket,
        eBind,
        eConnect,
        eListen,
        eHost,
        eRecv,
        eGetHostByName,
        eWSACreateEvent,
        eWSASend,
        eWSAGetOverlappedResult,
        eWSARecv,
        eWSAWaitForMultipleEvents,
        eWSAStartup,
        eWSAResetEvent,
        eWSAEnumNetworkEvents,
        eWSAEventSelect,
        eSelect,
        eAccept,
        eNonRetryable
    };

    CSocketErr(Action eAction, LPCTSTR
szLocation = NULL);

    ~CSocketErr()
    {
        if (m_szErrorText != NULL)
            delete []
m_szErrorText;
    };

    Action m_eAction;
    char *m_szErrorText;

    int ErrorType() { return
ERR_TYPE_SOCKET;};
    char* ErrorTypeStr() { return "SOCKET";
}
    char* ErrorText(void);
    int ErrorAction() { return
(int)m_eAction; }
};

class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,

```

```

        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile = 10,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        ebeginthread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
        eRegisterClassEx,
        eCreateWindow,
        eCreateSemaphore,
        eReleaseSemaphore,
        eFSeek,
        eFRead,
        eFWrite,
        eTmpFile,
        eSetFilePointer,
        eNew,
        eCloseHandle,
        eGetOverlappedResult
    };

    CSystemErr(Action
eAction, LPCTSTR szLocation);
    CSystemErr(int iError,
Action eAction, LPCTSTR szLocation);
    int ErrorType() { return
ERR_TYPE_OS;};
    char* ErrorTypeStr() { return "SYSTEM";
}
    char *ErrorText(void);
    int ErrorAction() { return
(int)m_eAction; }
    void Draw(HWND hwnd, LPCTSTR szStr =
NULL);
    Action m_eAction;

private:
    char m_szMsg[ERR_MSG_BUF_SIZE];
};

class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr();

    int ErrorType() {return
ERR_TYPE_MEMORY;};
    char* ErrorTypeStr() { return "OUT OF
MEMORY"; }
}

```

```

    char* ErrorText() {return
ERR_INS_MEMORY;};
};

class CBufferOverflowErr : public CBaseErr
{
public:
    CBufferOverflowErr(int,LPTSTR);

    int ErrorType() {return
ERR_BUF_OVERFLOW;};
    char* ErrorTypeStr() { return "BUFFER
OVERFLOW"; }
    char* ErrorText() {return
ERR_INS_BUF_OVERFLOW;};
};

// Exception type for XML profiles
class CXMLProfileErr : public CBaseErr
{
public:
    enum Action
    {
        LoadProfile = 1,
        LoadSchema,
        ValidateProfile,
        SaveProfile,
        LoadFromXML,
        SaveToXML,
        ApplyProcessingInstruction,
        ApplyAttribute,
        ApplyNode
    };

    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        m_bOverload = true;
    };
    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation, char * szMsg)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        strcpy(m_szMsg, szMsg);
        m_bOverload = false;
    };

    virtual int
ErrorType() { return
ERR_TYPE_XML_PROFILE;};
    virtual char
*ErrorTypeStr() { return "XML PROFILE"; };
    virtual char
*ErrorText();

    virtual int
ErrorCode() { return m_eCode; };
    int
ErrorAction() { return (int)m_eAction; }
}

```

```

        //virtual void Draw(HWND
hwnd, LPCTSTR szStr = NULL)
        //{
        //      ::MessageBox(hwnd,
szStr, m_szLoc, MB_OK);
        //};
private:
    char
m_szMsg[ERR_MSG_BUF_SIZE];
    LPCTSTR m_szLoc;
    int m_eCode;
    bool m_bOverload;
    Action m_eAction;
};

```

## install.c

```

/* FILE: INSTALL.C
 * Microsoft
TPC-C Kit Ver. 4.51.000
 * Copyright
Microsoft, 2003
 * All Rights Reserved
 *
 * not audited
 *
 * PURPOSE: Automated installation
application for TPC-C Web Kit
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - added COM installation
steps
 * 4.50.000 - added IIS6 configuration options
 * 4.51.000 - added routines to copy
Visual Studio runtime module (MSVCR70.DLL)
 * to
SystemRoot\System32
 */

#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <tchar.h>
#include <stdio.h>
#include <commctrl.h>
#include "..\..\common\src\ReadRegistry.h"
#include <process.h>

#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON hIcon;
HINSTANCE hInst;

DWORD versionExeMS;
DWORD versionExeLS;

```

```

DWORD versionExeMM;
DWORD versionDllMS;
DWORD versionDllLS;

// TPC-C registry settings
TPCCREGISTRYDATA Reg;

static int iPoolThreadLimit;
static int iMaxPoolThreads;
static int iThreadTimeout;
static int iListenBackLog;
static int iAcceptExOutstanding;
static int iUriEnableCache;
static int iUriScavengerPeriod;
static int iMaxConnections;

static int iIISMajorVersion;
static int iNumberOfProcessors;

static int iMaxPhysicalMemory;
//max physical memory in MB
static char szLastFileName[64]; //
last file we worked on (for error reporting)

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
static void ProcessOK(HWND hwnd,
char *szDllPath, char *szWindowsPath);
static void
ReadRegistrySettings(void);
static void
WriteRegistrySettings(char *szDllPath);
static BOOL RegisterDLL(char
*szFileName);
static int
CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath);
static BOOL GetInstallPath(char
*szDllPath);
static BOOL
GetWindowsInstallPath(char *szWindowsPath);
static void GetVersionInfo(char
*szDLLPath, char *szExePath);
static BOOL
CheckWWWWebService(void);
static
StartWWWWebService(void);
static BOOL StopWWWWebService(void);
static void UpdateDialog(HWND
hDlg);
static void
ConfigureIIS6(HWND
hwnd, HWND hDlg);

SYSTEM_INFO siSysInfo;

BOOL install_com(char *szDllPath);

```

```

#include "..\..\common\src\ReadRegistry.cpp"

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE
hPrevInstance, LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;

    InitCommonControls();

    hIcon = LoadIcon(hInstance,
MAKEINTRESOURCE(IDI_ICON1));

    iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(),
LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(),
MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(),
UpdatedDlgProc, (LPARAM)iRc);
        }
    }

    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    HGLOBAL hRes;
    HRSRC hResInfo;
    BYTE *pSrc, *pDst;
    DWORD dwSize;
    static HFONT hFont;

    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12,
0, 0, 0, 400, 0, 0, 0, 0, 0, 0, 0, 0, "Arial");
            SendMessage(
GetDlgItem(hwnd, IDR_LICENSE1), WM_SETFONT,
(WPARAM)hFont, MAKELPARAM(0, 0) );
            PostMessage(hwnd,
WM_INITTEXT, (WPARAM)0, (LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo =
FindResource(hInst, MAKEINTRESOURCE(IDR_LICENSE1),
"LICENSE");
            dwSize =
SizeofResource(hInst, hResInfo);

```



```

        hRes =
LoadResource(hInst, hResInfo );
        pSrc = (BYTE
*)LockResource(hRes);
        pDst = (unsigned char
*)malloc(dwSize+1);
        if ( pDst )
        {
            memcpy(pDst,
pSrc, dwSize);
            pDst[dwSize]
= 0;
            SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pDst);
            free(pDst);
        }
        else
            SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
        return TRUE;
    case WM_DESTROY:
        DeleteObject(hFont);
        return TRUE;
    case WM_COMMAND:
        if ( wParam == IDOK )
            EndDialog(hwnd, TRUE);
        if ( wParam == IDCANCEL)
            EndDialog(hwnd, FALSE);
        default:
            break;
    }
    return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:
                    SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C
Web Client Installed");
                    break;
            }
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            break;
        default:
            break;
    }
}

```

```

        }
        return FALSE;
    }
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFO VI;
    char szTmp[256];
    static char
szDllPath[256];
    static char
szWindowsPath[256];
    static char
szExePath[256];

    switch(uMsg)
    {
        case WM_INITDIALOG:
            GlobalMemoryStatus(&memoryStatus);
            iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);

            if (
GetWindowsInstallPath(szWindowsPath) )
            {
                MessageBox(hwnd, "Error: Cannot determine
Windows System Root.", NULL, MB_ICONSTOP | MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }

            if (
GetInstallPath(szDllPath) )
            {
                MessageBox(hwnd, "Error internet service
inetsrv is not installed.", NULL, MB_ICONSTOP |
MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }

            // set default values
            ZeroMemory( &Reg,
sizeof(Reg) );
            Reg.dwNumberOfDeliveryThreads = 4;
            Reg.dwMaxConnections =
100;
            Reg.dwMaxPendingDeliveries = 100;
            Reg.eDB_Protocol =
ODBC;
            Reg.eTxnMon = None;
            strcpy(Reg.szDbServer,
"");
        }
    }
}

```

```

            strcpy(Reg.szDbName,
"tpcc");
            strcpy(Reg.szDbUser,
"sa");
            strcpy(Reg.szDbPassword,
"");
            iPoolThreadLimit =
iMaxPhysicalMemory * 2;
            iThreadTimeout = 86400;
            iListenBackLog = 15;
            iAcceptExOutstanding =
40;

            ReadTPCCRegistrySettings( &Reg );
            ReadRegistrySettings();

            // copy the hardware
information to the SYSTEM_INFO structure
            GetSystemInfo(&siSysInfo);
            // store the number of
processors on this system
            iNumberOfProcessors =
siSysInfo.dwNumberOfProcessors;

            GetModuleFileName(hInst, szExePath,
sizeof(szExePath));
            GetVersionInfo(szDllPath, szExePath);

            wsprintf(szTmp,
"Version %d.%2d.%3d", versionExeMS, versionExeMM,
versionExeLS);
            SetDlgItemText(hwnd,
IDC_VERSION, szTmp);
            SetDlgItemText(hwnd,
IDC_PATH, szDllPath);
            SetDlgItemText(hwnd,
ED_DB_SERVER, Reg.szDbServer);
            SetDlgItemText(hwnd,
ED_DB_USER_ID, Reg.szDbUser);
            SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);
            SetDlgItemText(hwnd,
ED_DB_NAME, Reg.szDbName);
            SetDlgItemInt(hwnd,
ED_THREADS, Reg.dwNumberOfDeliveryThreads, FALSE);
            SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);
            SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);
            SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit,
FALSE);
            SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);
        }
    }
}

```

```

        SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);
        SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);

        // check OS version
level for COM. Must be at least Windows 2000
        VI.dwOSVersionInfoSize
= sizeof(VI);
        GetVersionEx( &VI );
        if (VI.dwMajorVersion <
5)
        {
                HWND hDlg =
GetDlgItem( hwnd, IDC_TM_MTS );
                EnableWindow(
hDlg, 0 ); // disable COM option
                if
(Reg.eTxnMon == COM)
                        Reg.eTxnMon = None;
        }
        CheckDlgButton(hwnd,
IDC_TM_NONE, 0);
        CheckDlgButton(hwnd,
IDC_TM_MTS, 0);
        switch (Reg.eTxnMon)
        {
        case None:
                CheckDlgButton(hwnd, IDC_TM_NONE, 1);
                break;
        case COM:
                CheckDlgButton(hwnd, IDC_TM_MTS, 1);
                break;
        }
        return TRUE;
        case WM_PAINT:
                if ( IsIconic(hwnd) )
                {
                        BeginPaint(hwnd, &ps);
                        DrawIcon(ps.hdc, 0, 0, hIcon);
                        EndPaint(hwnd, &ps);
                }
                return TRUE;
                break;
        case WM_COMMAND:
                if ( HIWORD(wParam) ==
BN_CLICKED )
                {
                        switch(
LOWORD(wParam) )
                {
                        case IDOK:

```

```

ProcessOK(hwnd, szDllPath, szWindowsPath);
return TRUE;
case IDCANCEL:
EndDialog(hwnd, FALSE);
return TRUE;
default:
return FALSE;
}
}
static void ProcessOK(HWND hwnd, char *szDllPath,
char *szWindowsPath)
{
        int                d;
        HWND              hDlg;
        int                rc;
        BOOL               bSvcRunning;
        char               szFullName[256];
        char               szErrTxt[128];

        // Check whether Service Pack 1 has been
installed if
        // running on Windows Server 2003. The RTM
version has
        // a limitation on the number of concurrent
HTTP connections.
        //
        OSVERSIONINFOEX          VersionInfo;
        VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
        if
(GetVersionEx((LPOSVERSIONINFO)&VersionInfo))
        {
                if (VersionInfo.dwMajorVersion ==
5 && // Windows 2000/2003 Server?
                VersionInfo.dwMinorVersion == 2 && //
Windows 2003 Server?
                VersionInfo.wServicePackMajor == 0) //
Service Pack installed?
                {
                        TCHAR szMsg[256];
                        _sntprintf(szMsg,
sizeof(szMsg),

```

```

"Warning:
running on Windows Server 2003 without at least
Service Pack 1\n"
"limits the
number of concurrent HTTP connections to around
8000.");
        MessageBox(hwnd, szMsg,
_T("Service Pack not Installed"), MB_ICONEXCLAMATION
| MB_OK);
}
}
// read settings from dialog
Reg.dwNumberOfDeliveryThreads =
GetDlgItemInt(hwnd, ED_THREADS, &d, FALSE);
Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
Reg.dwMaxPendingDeliveries =
GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d, FALSE);
        GetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer, sizeof(Reg.szDbServer));
        GetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser, sizeof(Reg.szDbUser));
        GetDlgItemText(hwnd, ED_DB_PASSWORD,
Reg.szDbPassword, sizeof(Reg.szDbPassword));
        GetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName, sizeof(Reg.szDbName));
        if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE)
)
                Reg.eTxnMon = None;
        else if ( IsDlgButtonChecked(hwnd,
IDC_TM_MTS) )
                Reg.eTxnMon = COM;
        iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
        iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
        iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
        iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);
        ShowWindow(hwnd, SW_HIDE);
        hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
        ShowWindow(hDlg, SW_SHOWNA);
        UpdateDialog(hDlg);
        // check to see if the web services are
running
        bSvcRunning = CheckWWWService();
        if ( bSvcRunning )
        {
                SetDlgItemText(hDlg, IDC_STATUS,
"Stopping Web Service.");
                SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
                UpdateDialog(hDlg);

```

```

        StopWWWService();
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }

    // write binaries to inetpub\wwwroot
    rc = CopyFiles(hDlg, szDllPath,
szWindowsPath);
    if ( !rc )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "Error(s)
occured when creating " );
        strcat( szErrTxt, szLastFileName
);
        MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }

    // while we have the web services shutdown,
check to see if this
    // is IIS6. If it is, then call
ConfigureIIS6
    if ( iIISMajorVersion == 6)
    {
        ConfigureIIS6(hwnd, hDlg);
    }

    //if we stopped service restart it.
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS,
"Starting Web Service.");
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
        StartWWWService();
    }

    // update registry
    SetDlgItemText(hDlg, IDC_STATUS, "Updating
Registry.");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    WriteRegistrySettings(szDllPath);

    // register com proxy stub
    strcpy(szFullName, szDllPath);
    strcat(szFullName, "tpcc_com.ps.dll");
    if (!RegisterDLL(szFullName))
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "Error occured
when registering " );
        strcat( szErrTxt, szFullName );
        MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);

```

```

        EndDialog(hwnd, 0);
        return;
    }

    // if using COM
    if (Reg.eTxnMon == COM)
    {
        SetDlgItemText(hDlg, IDC_STATUS,
"Configuring COM.");
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        if (install_com(szDllPath))
        {
            ShowWindow(hwnd,
SW_SHOWNA);
            DestroyWindow(hDlg);
            strcpy( szErrTxt,
"Error occured when configuring COM settings." );
            MessageBox(hwnd,
szErrTxt, NULL, MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, 0);
            return;
        }
    }

    Sleep(100);

    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);

    EndDialog(hwnd, rc);
    return;
}

static void ReadRegistrySettings(void)
{
    HKEY    hKey;
    DWORD  size;
    DWORD  type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\InetStp", 0, KEY_READ, &hKey)
== ERROR_SUCCESS )
    {
        size = sizeof(iIISMajorVersion);
        if ( RegQueryValueEx(hKey,
"MajorVersion", 0, &type, (char *)&iIISMajorVersion,
&size) == ERROR_SUCCESS )
            if ( !iIISMajorVersion
)
                iIISMajorVersion = 5;
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param
eters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        if ( iIISMajorVersion == 6)
            {

```

```

        // since IIS6 handles
the pool thread parameters differently, we need to
fill in the dialog

        // with the
MaxPoolThreads rather than PoolThreadLimit
        // for ease of coding,
we are just going to stuff the value into
iPoolThreadLimit
        size = sizeof(iPoolThreadLimit);
        if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
            if ( !iPoolThreadLimit
)
                iPoolThreadLimit = iMaxPhysicalMemory * 2;
            else
            {
                size =
sizeof(iPoolThreadLimit);
                if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
                    if ( !iPoolThreadLimit
)
                        iPoolThreadLimit = iMaxPhysicalMemory * 2;
            }

        size = sizeof(iThreadTimeout);
        if ( RegQueryValueEx(hKey,
"ThreadTimeout", 0, &type, (char *)&iThreadTimeout,
&size) == ERROR_SUCCESS )
            if ( !iThreadTimeout )
                iThreadTimeout = 86400;

        size = sizeof(iListenBackLog);
        if ( RegQueryValueEx(hKey,
"ListenBackLog", 0, &type, (char *)&iListenBackLog,
&size) == ERROR_SUCCESS )
            if ( !iListenBackLog )
                iListenBackLog = 15;

        RegCloseKey(hKey);
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size =
sizeof(iAcceptExOutstanding);
        if ( RegQueryValueEx(hKey,
"AcceptExOutstanding", 0, &type, (char
*)&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
            if (
!iAcceptExOutstanding )
                iAcceptExOutstanding = 40;
    }

```

```

        RegCloseKey(hKey);
    }
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\HTTP\\Parameter
s", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size = sizeof(iUriEnableCache);
        if ( RegQueryValueEx(hKey,
"UriEnableCache", 0, &type, (char *)&iUriEnableCache,
&size) == ERROR_SUCCESS )
            if ( !iUriEnableCache )
                iUriEnableCache = 0;

        size =
sizeof(iUriScavengerPeriod);
        if ( RegQueryValueEx(hKey,
"UriScavengerPeriod", 0, &type, (char
*)&iUriScavengerPeriod, &size) == ERROR_SUCCESS )
            if (
!iUriScavengerPeriod )
                iUriScavengerPeriod = 10800;

        size = sizeof(iMaxConnections);
        if ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (char *)&iMaxConnections,
&size) == ERROR_SUCCESS )
            if ( !iMaxConnections )
                iMaxConnections = 100000;

        RegCloseKey(hKey);
    }
}

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY    hKey;
    DWORD   dwDisposition;
    char    szTmp[256];
    char    *ptr;
    int     iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0,
REG_SZ, szTmp, strlen(szTmp)+1);

        RegSetValueEx(hKey,
"NumberOfDeliveryThreads", 0, REG_DWORD, (char
*)&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));
    }
}

```

```

        RegSetValueEx(hKey,
"MaxConnections", 0, REG_DWORD, (char
*)&Reg.dwMaxConnections,
sizeof(Reg.dwMaxConnections));

        RegSetValueEx(hKey,
"MaxPendingDeliveries", 0, REG_DWORD, (char
*)&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hKey,
"DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol],
strlen(szDBNames[Reg.eDB_Protocol])+1);
        RegSetValueEx(hKey, "TxnMonitor",
0, REG_SZ, szTxnMonNames[Reg.eTxnMon],
strlen(szTxnMonNames[Reg.eTxnMon])+1);

        RegSetValueEx(hKey, "DbServer",
0, REG_SZ, Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0,
REG_SZ, Reg.szDbName, strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0,
REG_SZ, Reg.szDbUser, strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword",
0, REG_SZ, Reg.szDbPassword,
strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey,
"COM_SinglePool", 0, REG_SZ, szTmp, strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param
eters", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        // if this is IIS6, then we need
to treat the PoolThreadLimit differently
        // if IIS6, then PoolThreadLimit
is the maximum number of threads for the entire
system.
        // IIS6 added MaxPoolThreads
which controls the number of threads per processor.
For IIS6
        // we will set MaxPoolThreads to
the value the user provided in the dialog and then
set
        // PoolThreadLimit to
MaxPoolThreads * number of processors on this system
        if ( iIISMajorVersion == 6 )
        {
            iMaxPoolThreads =
iPoolThreadLimit;
            iPoolThreadLimit =
iMaxPoolThreads * iNumberOfProcessors;
        }
    }
}

```

```

        RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
        RegSetValueEx(hKey,
"MaxPoolThreads", 0, REG_DWORD, (char
*)&iMaxPoolThreads, sizeof(iMaxPoolThreads));
    }
    else
    {
        RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
    }

    RegSetValueEx(hKey,
"ThreadTimeout", 0, REG_DWORD, (char
*)&iThreadTimeout, sizeof(iThreadTimeout));
    RegSetValueEx(hKey,
"ListenBackLog", 0, REG_DWORD, (char
*)&iListenBackLog, sizeof(iListenBackLog));

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

    if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hKey,
"AcceptExOutstanding", 0, REG_DWORD, (char
*)&iAcceptExOutstanding,
sizeof(iAcceptExOutstanding));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETRANGE, 0, MAKELPARAM(0, 13));
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC    lpDllEntryPoint;
}

```

```

        hLib = LoadLibrary(szFileName);
        if ( hLib == NULL )
            return FALSE;
        // Find the entry point.
        lpDllEntryPoint = GetProcAddress(hLib,
"DllRegisterServer");
        if (lpDllEntryPoint != NULL)
        {
            return ((*lpDllEntryPoint)() ==
S_OK);
        }
        else
            return FALSE; //unable to
locate entry point
}

BOOL FileFromResource( char *szResourceName, int
iResourceId, char *szDllPath, char *szFileName )
{
    HGLOBAL          hDLL;
    HRSRC            hResInfo;
    HANDLE           hFile;
    DWORD            dwSize;
    BYTE             *pSrc;
    DWORD            d;
    char             szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !(hFile = CreateFile(szFullName,
GENERIC_WRITE, 0, NULL, CREATE_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d,
NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath)
{
    SetDlgItemText(hDlg, IDC_STATUS, "Copying
Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

```

```

        // install TPCC.DLL
        strcpy( szLastFileName, "tpcc.dll" );
        if (!FileFromResource( "TPCCDLL",
IDR_TPCCDLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install MSVCR71.DLL
        strcpy( szLastFileName, "msvcr71.dll" );
        if (!FileFromResource( "MSVCR71",
IDR_MSVCR71, szWindowsPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_odbc.dll
        strcpy( szLastFileName, "tpcc_odbc.dll" );
        if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com.dll
        strcpy( szLastFileName, "tpcc_com.dll" );
        if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_all.tlb
        strcpy( szLastFileName, "tpcc_com_all.tlb"
);
        if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_ps.dll
        strcpy( szLastFileName, "tpcc_com_ps.dll"
);
        if (!FileFromResource( "COM_PS_DLL",
IDR_COMPS_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_all.dll
        strcpy( szLastFileName, "tpcc_com_all.dll"
);
        if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))

```

```

        return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        return 1;
    }

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY    hKey;
    BYTE    szData[256];
    DWORD   sv;
    BOOL    bRc;
    int     len;
    int     iRc;

    // Registry key
    HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\InetStp\PathWWW
Root is used to find the
    // IIS default web site directory and
determine that IIS is installed.

    szDllPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\InetStp", 0, KEY_ALL_ACCESS,
&hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey,
"PathWWWRoot", NULL, NULL, szData, &sv ); // used by
IIS 5.0 & 6.0
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szDllPath,
szData);
            len =
strlen(szDllPath);
            if ( szDllPath[len-1]
!= '\\ ' )
            {
                szDllPath[len] = '\\';
                szDllPath[len+1] = 0;
            }
            RegCloseKey(hKey);
        }

        return bRc;
    }

static BOOL GetWindowsInstallPath(char
*szWindowsPath)

```

```

{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    int iRc;

    // Registry key
    HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows
    NT\CurrentVersion\SystemRoot is used to find the
    // system root to install the VC70 DLL.

    szWindowsPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\Windows NT\CurrentVersion", 0,
KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey,
"SystemRoot", NULL, NULL, szData, &sv );
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szWindowsPath,
szData);
            len =
strlen(szWindowsPath);
            if ( szWindowsPath[len-
1] != '\\' )
            {
                szWindowsPath[len] = '\\';
                szWindowsPath[len+1] = 0;
            }
            // now append the path
            strcat(szWindowsPath,
"SYSTEM32\");
        }

        RegCloseKey(hKey);
    }

    return bRc;
}

static void GetVersionInfo(char *szDLLPath, char
*szExePath)
{
    DWORD d;
    DWORD dwSize;
    DWORD dwBytes;
    char
*ptr;
    VS_FIXEDFILEINFO *vs;

    versionDllMS = 0;
    versionDllLS = 0;

```

```

        if ( _access(szDLLPath, 0) == 0 )
        {
            dwSize =
GetFileVersionInfoSize(szDLLPath, &d);
            if ( dwSize )
            {
                ptr = (char
*)malloc(dwSize);

                GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
                VerQueryValue(ptr,
"\\",&vs, &dwBytes);
                >dwProductVersionMS;
                versionDllMS = vs-
                >dwProductVersionLS;
                versionDllLS = vs-
                free(ptr);
            }
        }

        versionExeMS = 0x7FFF;
        versionExeLS = 0x7FFF;
        dwSize = GetFileVersionInfoSize(szExePath,
&d);
        if ( dwSize )
        {
            ptr = (char *)malloc(dwSize);
            GetFileVersionInfo(szExePath, 0,
dwSize, ptr);
            VerQueryValue(ptr, "\\",&vs,
&dwBytes);
            versionExeMS = vs-
            >dwProductVersionMS;
            versionExeLS = LOWORD(vs-
            >dwProductVersionLS);
            versionExeMM = HIWORD(vs-
            >dwProductVersionLS);
            free(ptr);
        }
        return;
    }

    static BOOL CheckWWWService(void)
    {
        SC_HANDLE schSCManager;
        SC_HANDLE schService;
        SERVICE_STATUS ssStatus;

        schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
        schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
        if (schService == NULL)
            return FALSE;

        if (! QueryServiceStatus(schService,
&ssStatus) )
            goto ServiceNotRunning;

        if ( !ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )

```

```

            goto ServiceNotRunning;
        //start Service pending, Check the status
        until the service is running.
        if (! QueryServiceStatus(schService,
&ssStatus) )
            goto ServiceNotRunning;

        CloseServiceHandle(schService);
        return TRUE;

    ServiceNotRunning:
        CloseServiceHandle(schService);
        return FALSE;
}

static BOOL StartWWWService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! StartService(schService, 0, NULL) )
        goto StartWWWWebErr;
    //start Service pending, Check the status
    until the service is running.
    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto StartWWWWebErr;
    while( ssStatus.dwCurrentState !=
SERVICE_RUNNING)
    {
        dwOldCheckPoint =
ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
ssStatus.dwCheckPoint) //Break if
        the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
SERVICE_RUNNING)
        goto StartWWWWebErr;

    CloseServiceHandle(schService);

```

```

        return TRUE;
StartWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWebService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;
    DWORD              dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
    SC_MANAGER_ALL_ACCESS);
    //schService = OpenService(schSCManager,
    TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    schService = OpenService(schSCManager,
    TEXT("IISADMIN"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWebErr;

    if ( !ControlService(schService,
    SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWebErr;
    //start Service pending, Check the status
    until the service is running.
    if (! QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWebErr;
    while( ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
    {
        dwOldCheckPoint =
    ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
    !QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
    ssStatus.dwCheckPoint) //Break if
    the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
        goto StopWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;
}

```

```

StopWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0,
    PM_REMOVE) )
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

static void ConfigureIIS6(HWND hwnd, HWND hDlg)
{
    int         irc;
    char        szErrTxt[128];
    FILE        *fErrorFile;

    SetDlgItemText(hDlg, IDC_STATUS,
    "Configuring IIS6...");
    //SendDlgItemMessage(hDlg, IDC_PROGRESS1,
    PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    irc = system("IIS6_CONFIG.CMD");

    // since the return code from the command
    file is always 1,
    // check to see if the file iis6_config.err
    exists
    // if it does, then something hosed
    fErrorFile = fopen("IIS6_CONFIG.err","r");
    if ( fErrorFile != NULL )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "IIS6
    configuration error. " );
        strcat( szErrTxt, "Check
    iis6_config.err" );
        MessageBox(hwnd, szErrTxt, NULL,
    MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
}

install.h
//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//

```

```

#define IDD_DIALOG1          101
#define IDI_ICON1           102
#define IDR_TPCCDLL         103
#define IDD_DIALOG2        105
#define IDI_ICON2           106
#define IDR_DELIVERY        107
#define IDD_DIALOG3        108

#define BN_LOG               1001
#define ED_KEEP              1002
#define ED_THREADS          1003
#define ED_THREADS2         1004
#define IDC_PATH             1007
#define IDC_VERSION         1009
#define IDC_RESULTS         1010
#define IDC_PROGRESS1       1011
#define IDC_STATUS          1012
#define IDC_BUTTON1         1013
#define ED_MAXCONNECTION   1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_ODBC             1022
#define IDC_CONNECT_POOL    1023
#define ED_USER_CONNECT_DELAY_TIME 1024

// Next default values for new objects
//
install.rc
// Microsoft Visual C++ generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

////////////////////////////////////
////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS

////////////////////////////////////
////////////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

////////////////////////////////////
////////////////////////////////////
//
// Dialog
//

IDD_DIALOG1 DIALOGEX 0, 0, 219, 324
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_MINIMIZEBOX | WS_POPUP |
WS_CAPTION | WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif", 0, 0, 0x1
BEGIN
    EDITTEXT        ED_THREADS,164,45,34,12,ES_RIGHT
    | ES_NUMBER,
    WS_EX_RTLREADING

    EDITTEXT
ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
WS_EX_RTLREADING

    EDITTEXT
ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
WS_EX_RTLREADING

    CONTROL
"None", IDC_TM_NONE, "Button", BS_AUTORADIOBUTTON |
WS_GROUP |
WS_TABSTOP, 43, 104, 33, 10

    CONTROL
"COM", IDC_TM_MTS, "Button", BS_AUTORADIOBUTTON |
WS_TABSTOP, 94, 104, 32, 10

    EDITTEXT
ED_DB_SERVER, 131, 145, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_DB_USER_ID, 131, 158, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_DB_PASSWORD, 131, 171, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_DB_NAME, 131, 184, 67, 12, ES_AUTOHSCROLL
    EDITTEXT
ED_IIS_MAX_THREAD_POOL_LIMIT, 164, 226, 34, 12, ES_RIGHT |
ES_NUMBER, WS_EX_RTLREADING

    EDITTEXT
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, 164, 240, 34, 12, ES_RI
GHT |
ES_NUMBER, WS_EX_RTLREADING

    EDITTEXT
ED_IIS_THREAD_TIMEOUT, 164, 254, 34, 12, ES_RIGHT |
ES_NUMBER,
WS_EX_RTLREADING

```

```

EDITTEXT
ED_IIS_LISTEN_BACKLOG, 164, 268, 34, 12, ES_RIGHT |
ES_NUMBER,
WS_EX_RTLREADING

DEFPUSHBUTTON    "OK", IDOK, 53, 296, 50, 14
PUSHBUTTON      "Cancel", IDCANCEL, 119, 296, 50, 14
EDITTEXT
IDC_PATH, 106, 26, 91, 13, ES_AUTOHSCROLL | ES_READONLY
LTEXT           "Number of Delivery
Threads:", IDC_STATIC, 35, 45, 115, 12
LTEXT           "Max Number of
Connections:", IDC_STATIC, 35, 73, 115, 12
RTEXT           "Version
4.11", IDC_VERSION, 120, 4, 89, 9
LTEXT           "IIS Max Thread Pool
Limit:", IDC_STATIC, 36, 226, 115, 12
LTEXT           "Web Service Backlog Queue
Size:", IDC_STATIC, 36, 240, 115,
12
LTEXT           "IIS Thread Timeout
(seconds):", IDC_STATIC, 36, 254, 115, 12
LTEXT           "IIS Listen
Backlog:", IDC_STATIC, 36, 270, 115, 10
LTEXT           "Installation
directory:", IDC_STATIC, 35, 29, 71, 10
GROUPBOX       "Transaction
Monitor", IDC_STATIC, 33, 90, 165, 33
LTEXT           "Server
Name:", IDC_STATIC, 35, 148, 56, 8
LTEXT           "User ID:", IDC_STATIC, 35, 161, 60, 8
LTEXT           "User
Password:", IDC_STATIC, 35, 174, 83, 8
LTEXT           "Database
Name:", IDC_STATIC, 35, 187, 54, 8
GROUPBOX       "SQL Server Connection
Properties", IDC_STATIC, 22, 132, 187,
74
GROUPBOX       "Web Client
Properties", IDC_STATIC, 22, 15, 187, 113
GROUPBOX       "IIS
Settings", IDC_STATIC, 22, 210, 187, 79
LTEXT           "Max Pending
Deliveries:", IDC_STATIC, 35, 59, 115, 12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFONT | DS_SETFOREGROUND | DS_3DLOOK |
DS_CENTER | WS_POPUP |
WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON    "OK", IDOK, 33, 45, 50, 9
    CTEXT           "HTML TPC-C Installation
Successful", IDC_RESULTS, 7, 22,
102, 18, 0, WS_EX_CLIENTEDGE

    ICON
IDI_ICON2, IDC_STATIC, 50, 7, 18, 20, SS_REALSIZEIMAGE,
WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG 0, 0, 91, 40

```

```

STYLE DS_SYSMODAL | DS_SETFONT | DS_MODALFRAME |
DS_3DLOOK | DS_CENTER |
WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL
"Progress1", IDC_PROGRESS1, "mctl_progress32", WS_BORD
ER,
7, 20, 77, 13

    CTEXT
"Static", IDC_STATUS, 7, 7, 77, 12, SS_SUNKEN
END

IDD_DIALOG4 DIALOG 0, 0, 291, 202
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT
IDC_LICENSE, 7, 7, 271, 167, ES_MULTILINE | ES_AUTOVSCROLL
|
ES_AUTOHSCROLL | ES_READONLY |
WS_VSCROLL | WS_HSCROLL
DEFPUSHBUTTON    "I &Agree", IDOK, 87, 181, 50, 14
PUSHBUTTON      "&Cancel", IDCANCEL, 153, 181, 50, 14
END

////////////////////////////////////
////////////////////////////////////
//
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 318
    END

    IDD_DIALOG2, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 109
        TOPMARGIN, 7
        BOTTOMMARGIN, 54
    END

    IDD_DIALOG3, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 84
        TOPMARGIN, 7
    END

```



```

        BOTTOMMARGIN, 33
    END

    IDD_DIALOG4, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 278
        TOPMARGIN, 7
        BOTTOMMARGIN, 195
    END
END
#endif // APSTUDIO_INVOKED

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
////////////////////////////////////
//
// TEXTINCLUDE
//
1 TEXTINCLUDE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE
BEGIN
    "#include \"afxres.h\"\\r\\n"
    "\\0"
END

3 TEXTINCLUDE
BEGIN
    "\\r\\n"
    "\\0"
END

#endif // APSTUDIO_INVOKED

////////////////////////////////////
////////////////////////////////////
//
// Icon
//
// Icon with lowest ID value placed first to ensure
// remains consistent on all systems.
IDI_ICON1            ICON
"icon1.ico"
IDI_ICON2            ICON
"icon2.ico"

////////////////////////////////////
////////////////////////////////////
//
// TPCCDLL
//
IDR_TPCCDLL          TPCCDLL
"..\\..\\isapi_dll\\bin\\tpcc.dll"

```

```

////////////////////////////////////
////////////////////////////////////
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,50,0
PRODUCTVERSION 0,4,50,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
    FILEFLAGS 0x1L
#else
    FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C Web Client"
        END
    END
    Installer
    VALUE "CompanyName", "Microsoft"
    VALUE "FileDescription", "install"
    VALUE "FileVersion", "0, 4, 20, 0"
    VALUE "InternalName", "install"
    VALUE "LegalCopyright", "Copyright ©
1999"
    VALUE "OriginalFilename", "install.exe"
    VALUE "ProductName", "Microsoft install"
    VALUE "ProductVersion", "0, 4, 20, 0"
    END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END

////////////////////////////////////
////////////////////////////////////
//
// LICENSE
//
IDR_LICENSE1        LICENSE
"license.txt"

////////////////////////////////////
////////////////////////////////////
//
// ODBC_DLL
//
IDR_ODBC_DLL        ODBC_DLL
"..\\..\\db_odbc_dll\\bin\\Release\\tpcc_odbc.dll"

```

```

////////////////////////////////////
////////////////////////////////////
//
// COM_DLL
//
IDR_COM_DLL          COM_DLL
"..\\..\\tm_com_dll\\bin\\tpcc_com.dll"

////////////////////////////////////
////////////////////////////////////
//
// COM_PS_DLL
//
IDR_COMPS_DLL        COM_PS_DLL
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.dll"

////////////////////////////////////
////////////////////////////////////
//
// COM_ALL_DLL
//
IDR_COMALL_DLL       COM_ALL_DLL
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.dll"

////////////////////////////////////
////////////////////////////////////
//
// COM_TYPLIB
//
IDR_COMTYPLIB_DLL    COM_TYPLIB
"..\\..\\tpcc_com_all\\src\\tpcc_com_all.tlb"

////////////////////////////////////
////////////////////////////////////
//
// MSVCRT71
//
IDR_MSVCRT71         MSVCRT71
"C:\\WINDOWS\\system32\\msvcr71.dll"
#endif // English (U.S.) resources
////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//
////////////////////////////////////
////////////////////////////////////
//
// not APSTUDIO_INVOKED
//
#endif // not APSTUDIO_INVOKED

```

## install\_com.cpp

```
/* FILE: INSTALL_COM.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.51.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * not audited
 *
 * PURPOSE: installation code for COM
 * application for TPC-C Web Kit
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - first version
 */

#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp
= NULL;
    ICatalogCollection* pCatalogCollectionCo
= NULL;
    ICatalogCollection* pCatalogCollectionItf
= NULL;
    ICatalogCollection*
pCatalogCollectionMethod = NULL;

    ICatalogObject*
pCatalogObjectApp = NULL;
    ICatalogObject*
pCatalogObjectCo = NULL;
    ICatalogObject*
pCatalogObjectItf = NULL;
    ICatalogObject*
pCatalogObjectMethod = NULL;

    _bstr_t
bstrTemp, bstrTemp2, bstrTemp3, bstrTemp4;
    _bstr_t
bstrDllPath = szDllPath;
    _variant_t
vTmp, vKey;
    long
lActProp, lCount, lCountCo, lCountItf,
lCountMethod;
```

```
bool
bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);

    HRESULT hr =
CoCreateInstance(CLSID_COMAdminCatalog,
                NULL,
                CLSCTX_INPROC_SERVER,
                IID_ICOMAdminCatalog,
                (void**)
&pCOMAdminCat);

    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "Applications";

    // Attempt to connect to "Applications" in
the Catalog
    hr = pCOMAdminCat->GetCollection(bstrTemp,
                                    (IDispatch**)
&pCatalogCollectionApp);
    if (!SUCCEEDED(hr)) goto Error;

    // Attempt to load the "Applications"
collection
    hr = pCatalogCollectionApp->Populate();
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionApp-
>get_Count(&lCount);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through applications to delete
existing "TPC-C" application (if any)
    while (lCount > 0)
    {
        hr = pCatalogCollectionApp-
>get_Item(lCount - 1, (IDispatch**)
&pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogObjectApp-
>get_Name(&vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        if (wcsncmp(vTmp.bstrVal, L"TPC-
C"))
        {
            lCount--;
            continue;
        }
        else
        {
```

```
hr =
pCatalogCollectionApp->Remove(lCount - 1);
    if (!SUCCEEDED(hr))
goto Error;
        }
        }

        hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
        if (!SUCCEEDED(hr)) goto Error;

        // add the new application
        hr = pCatalogCollectionApp-
>Add((IDispatch**) &pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        // set properties
        bstrTemp = "Name";
        vTmp = "TPC-C";
        hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // set as a library (in process)
application
        bstrTemp = "Activation";
        lActProp = COMAdminActivationInproc;
        vTmp = lActProp;
        hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // set security level to process
        bstrTemp = "AccessChecksLevel";
        lActProp =
COMAdminAccessChecksApplicationLevel;
        vTmp = lActProp;
        hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // save key to get the Components
collection later
        hr = pCatalogObjectApp->get_Key(&vKey);
        if (!SUCCEEDED(hr)) goto Error;

        // save changes (app creation) so component
installation will work
        hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
        if (!SUCCEEDED(hr)) goto Error;

        pCatalogObjectApp->Release();
        pCatalogObjectApp = NULL;

        bstrTemp = "TPC-C";
        // app name
        bstrTemp2 = bstrDllPath +
"tpcc_com_all.dll"; // DLL
        bstrTemp3 = bstrDllPath +
"tpcc_com_all.tlb"; // type library (TLB)
```

```

        bstrTemp4 =      bstrDllPath +
"tpcc_com_ps.dll";    // proxy/stub dll

        hr = pCOMAdminCat-
>InstallComponent(bstrTemp,

        bstrTemp2,

        bstrTemp3,

        bstrTemp4);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "Components";
        hr = pCatalogCollectionApp-
>GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionCo);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo->Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo-
>get_Count(&lCountCo);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through components in
application and set the properties
        while (lCountCo > 0)
        {
                hr = pCatalogCollectionCo-
>get_Item(lCountCo - 1, (IDispatch**)
&pCatalogObjectCo);
                if (!SUCCEEDED(hr)) goto Error;

                // used for debugging (view the
name)
                hr = pCatalogObjectCo-
>get_Name(&vTmp);
                if (!SUCCEEDED(hr)) goto Error;

                bstrTemp = "ConstructionEnabled";
                bTmp = TRUE;
                vTmp = bTmp;
                hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
                if (!SUCCEEDED(hr)) goto Error;

                bstrTemp = "ConstructorString";
                bstrTemp2 = "dummy string (do not
remove)";

                vTmp = bstrTemp2;
                hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
                if (!SUCCEEDED(hr)) goto Error;

                bstrTemp =
"JustInTimeActivation";
                bTmp = TRUE;

```

```

        vTmp = bTmp;
        hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "MaxPoolSize";
        vTmp.Clear(); // clear
variant so it isn't
stored as a bool (_variant_t
feature)

        vTmp = (long)30;
        hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp =
"ObjectPoolingEnabled";
        bTmp = TRUE;
        vTmp = bTmp;
        hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        // save key to get the
InterfacesForComponent
collection
        hr = pCatalogObjectCo-
>get_Key(&vKey);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp =
"InterfacesForComponent";
        hr = pCatalogCollectionCo-
>GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionItf);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionItf-
>Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionItf-
>get_Count(&lCountItf);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through interfaces in
component
        while (lCountItf > 0)
        {
                hr =
pCatalogCollectionItf->get_Item(lCountItf - 1,
(IDispatch**) &pCatalogObjectItf);
                if (!SUCCEEDED(hr))
                goto Error;

                // save key to get the
MethodsForInterface
collection
                hr = pCatalogObjectItf-
>get_Key(&vKey);
                if (!SUCCEEDED(hr))
                goto Error;

```

```

        bstrTemp =
"MethodsForInterface";
        hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey,
(IDispatch**) &pCatalogCollectionMethod);
        if (!SUCCEEDED(hr))
        goto Error;

        hr =
pCatalogCollectionMethod->Populate();
        if (!SUCCEEDED(hr))
        goto Error;

        hr =
pCatalogCollectionMethod->get_Count(&lCountMethod);
        if (!SUCCEEDED(hr))
        goto Error;

        // iterate through
methods of interface
        while (lCountMethod >
0)
        {
                hr =
pCatalogCollectionMethod->get_Item(lCountMethod - 1,
(IDispatch**) &pCatalogObjectMethod);
                if
                (!SUCCEEDED(hr)) goto Error;

                bstrTemp =
"AutoComplete";
                bTmp = TRUE;
                vTmp = bTmp;
                hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
                if
                (!SUCCEEDED(hr)) goto Error;

                pCatalogObjectMethod->Release();
                pCatalogObjectMethod = NULL;

                lCountMethod-
                }

                // save changes
                hr =
pCatalogCollectionMethod->SaveChanges(&lActProp);
                if (!SUCCEEDED(hr))
                goto Error;

                pCatalogObjectItf-
>Release();
                pCatalogObjectItf =
                NULL;

                lCountItf--;
        }

```

```

        pCatalogObjectCo->Release();
        pCatalogObjectCo = NULL;

        lCountCo--;
    }

    // save changes
    hr = pCatalogCollectionCo-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

    pCatalogCollectionApp->Release();
    pCatalogCollectionApp = NULL;

    pCatalogCollectionCo->Release();
    pCatalogCollectionCo = NULL;

    pCatalogCollectionItf->Release();
    pCatalogCollectionItf = NULL;

    pCatalogCollectionMethod->Release();
    pCatalogCollectionMethod = NULL;

Error:
    CoUninitialize();

    if (!SUCCEEDED(hr))
    {
        LPTSTR lpBuf;
        DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER |
FORMAT_MESSAGE_FROM_SYSTEM,

                NULL,

                hr,

                MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),

                (LPTSTR)
&lpBuf,

                0,

                NULL);
//      _tprintf(_T("Error adding
components. HRESULT: 0x%x\n%s"), hr, lpBuf);
        return TRUE;
    }
    else
        return FALSE;
}

```

## license.txt

END-USER LICENSE AGREEMENT FOR  
MICROSOFT TPC-C BENCHMARK KIT

IMPORTANT READ CAREFULLY: This Microsoft End-

User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and Microsoft Corporation for the Microsoft software product identified above, which includes computer software and may include associated media, printed materials, and online or electronic documentation (SOFTWARE PRODUCT). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this Agreement, you are not authorized to use the SOFTWARE PRODUCT.

The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE. This EULA grants you the following rights:  
Use. Microsoft grants to you the right to install and use copies of the SOFTWARE PRODUCT only in conjunction with validly licensed copies of Microsoft SQL Server and/or Microsoft Windows NT Server software. You may also make copies of the SOFTWARE PRODUCT for backup and archival purposes.

2. RESTRICTIONS.  
--You must maintain all copyright notices on all copies of the SOFTWARE PRODUCT.  
--You may not distribute copies of the SOFTWARE PRODUCT to third parties.  
--You may not rent, lease or lend the SOFTWARE PRODUCT.  
--You may not use the SOFTWARE PRODUCT or any derivative works thereof to internally test database management system software other than Microsoft SQL Server and/or operating system software other than Microsoft Windows NT.  
-- You may not disclose the results of any benchmark tests using the SOFTWARE PRODUCT to any third party without Microsoft's prior written approval.  
-- You may not disclose or provide the SOFTWARE PRODUCT or any derivative works thereof, or any information relating to the SOFTWARE PRODUCT (including the existence of the SOFTWARE PRODUCT or the results of use and testing or benchmark testing), to any third party without Microsoft's written permission.

3. TERMINATION. Without prejudice to any other rights,

Microsoft may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT.

4. COPYRIGHT. All title and copyrights in and to the SOFTWARE PRODUCT and any copies thereof are owned by Microsoft or its suppliers. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT is the property of the respective content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants you no rights to use such content.

5. UPGRADES. If the SOFTWARE PRODUCT is labeled as an upgrade, you must be properly licensed to use a product identified by Microsoft as being eligible for the upgrade in order to use the SOFTWARE PRODUCT. A SOFTWARE PRODUCT labeled as an upgrade replaces and/or supplements the product that formed the basis for your eligibility for the upgrade. You may use the resulting upgraded product only in accordance with the terms of this EULA.

6. U.S. GOVERNMENT RESTRICTED RIGHTS. The SOFTWARE PRODUCT is provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, WA 98052-6399.

7. EXPORT RESTRICTIONS. You agree that you will not export or re-export the SOFTWARE PRODUCT to any country, person, entity or end user subject to U.S.A. export restrictions. Restricted countries currently include, but are not necessarily limited to Cuba, Iran, Iraq, Libya, North Korea, Syria, and the Federal Republic of Yugoslavia (Serbia and Montenegro, U.N. Protected Areas and areas of Republic of Bosnia and Herzegovina under the

control of Bosnian Serb forces). You warrant and represent that neither the U.S.A. Bureau of Export Administration nor any other federal agency has suspended, revoked or denied your export privileges.

8. NO WARRANTY. ANY USE OF THE SOFTWARE PRODUCT IS AT YOUR OWN RISK. THE SOFTWARE PRODUCT IS PROVIDED FOR USE ONLY WITH MICROSOFT SQL SERVER AND/OR MICROSOFT WINDOWS NT SERVER SOFTWARE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MICROSOFT AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT.

9. NO LIABILITY FOR CONSEQUENTIAL DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL MICROSOFT OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT, EVEN IF MICROSOFT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

10. LIMITATION OF LIABILITY. MICROSOFT'S ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY UNDER THIS EULA SHALL NOT EXCEED FIVE DOLLARS (US\$5.00).

11. MISCELLANEOUS  
This EULA is governed by the laws of the State of Washington, U.S.A.  
Should you have any questions concerning this EULA, or if you desire to contact Microsoft for any reason, please contact the Microsoft subsidiary serving your country, or write:  
Microsoft Sales Information Center/One Microsoft Way/Redmond, WA 98052-6399.

Si vous avez acquis votre produit Microsoft au CANADA, la garantie limitée suivante vous concerne:

EXCLUSION DE GARANTIES. Microsoft renonce entièrement ... toute garantie pour le LOGICIEL. Le

LOGICIEL et toute autre documentation s'y rapportant sont fournis @ comme tels sans aucune garantie quelle qu'elle soit, expresse ou implicite, y compris, mais ne se limitant pas aux garanties implicites de la qualité, marchande ou un usage particulier. Le risque total d'écoulement de l'utilisation ou de la performance du LOGICIEL est entre vos mains.

RESPONSABILITÉ LIMITÉE. La seule obligation de Microsoft et votre recours exclusif concernant ce contrat n'excéderont pas cinq dollars (US\$5.00).

ABSENCE DE RESPONSABILITÉ POUR LES DOMMAGES INDIRECTS. Microsoft ou ses fournisseurs ne pourront être tenus responsables en aucune circonstance de tout dommage quel qu'il soit (y compris mais non de façon limitative les dommages directs ou indirects causés par la perte de bénéfices commerciaux, l'interruption des affaires, la perte d'information commerciale ou toute autre perte pécuniaire) résultant de l'utilisation ou de l'impossibilité d'utilisation de ce produit, et ce, même si la société, Microsoft a, à l'avance, avisé de l'éventualité de tels dommages. Certains États/juridictions ne permettent pas l'exclusion ou la limitation de responsabilité relative aux dommages indirects ou consécutifs, et la limitation ci-dessus peut ne pas s'appliquer ... votre regard. La présente Convention est régie par les lois de la province d'Ontario, Canada.  
Chacune des parties ... la présente reconnaît irrévocablement la compétence des tribunaux de la province d'Ontario et consent ... instituer tout litige qui pourrait découler de la présente auprès des tribunaux situés dans le district judiciaire de York, province d'Ontario. Au cas où vous auriez des questions concernant cette licence ou que vous désiriez vous mettre en rapport avec Microsoft pour quelque raison que ce soit, veuillez contacter la succursale Microsoft desservant votre pays, dont l'adresse est fournie dans ce produit, ou écrire ...

Microsoft Customer Sales and Service, One Microsoft Way, Redmond, Washington 98052 6399.

## Methods.h

```
/* FILE: METHODS.H
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * not yet
 * audited
 * PURPOSE: Header file for COM components.
 * Change history:
 * 4.20.000 - first version
 */

enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL,
    ERR_MEM_ALLOC_FAILED
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR
Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CCOMPONENT_ERR(COMPONENT_ERROR
Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy(m_szTextDetail,
szTextDetail);
        m_SystemErr =
dwSystemErr;
        m_szErrorText = NULL;
    };

    ~CCOMPONENT_ERR()
    {
        if (m_szTextDetail !=
NULL)

```

```

delete []
m_szTextDetail;
        if (m_szErrorText !=
NULL)
delete []
m_szErrorText;
};
        COMPONENT_ERROR    m_Error;
        char
        *m_szTextDetail;
        char
        *m_szErrorText;
        DWORD
        m_SystemErr;

        int ErrorType() {return
ERR_TYPE_COMPONENT;};
        char *ErrorTypeStr() { return
"COMPONENT"; }
        int ErrorNum() {return m_Error;};
        char *ErrorText();
};

static void WriteMessageToEventLog(LPTSTR lpszMsg);

////////////////////////////////////
////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
public ITPCC,
public IObjectControl,
public IObjectConstruct,
public
CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
COM_INTERFACE_ENTRY(ITPCC)
COM_INTERFACE_ENTRY(IObjectControl)
COM_INTERFACE_ENTRY(IObjectConstruct)
END_COM_MAP()

        CTPCC_Common();
        ~CTPCC_Common();

// ITPCC
public:
        HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out);
        HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out);
        HRESULT __stdcall Delivery(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out);
        HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out);

        HRESULT __stdcall CallSetComplete();

```

```

// IObjectControl
        STDMETHODCALLTYPE CanBePooled() { return
m_bCanBePooled; }
        STDMETHODCALLTYPE Activate() { return S_OK; }
// we don't support COM Services
transactions (no enlistment)
        STDMETHODCALLTYPE Deactivate() { /*
nothing to do */ }

// IObjectConstruct
        STDMETHODCALLTYPE Construct(IDispatch * pUnk);

// helper methods
private:
        BOOL                m_bCanBePooled;
        CTPCC_BASE         *m_pTxn;

        struct COM_DATA
        {
                int retval;
                int error;
                union
                {
                        NEW_ORDER_DATA
NewOrder;
                        PAYMENT_DATA
Payment;
                        DELIVERY_DATA
Delivery;
                        STOCK_LEVEL_DATA
StockLevel;
                        ORDER_STATUS_DATA
OrderStatus;
                } u;
        };
};

////////////////////////////////////
////////////////////////////////////
// CTPCC
class CTPCC :
public CTPCC_Common,
public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

        BEGIN_COM_MAP(CTPCC)
//COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx<CComSingleThreadModel>)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()
};

////////////////////////////////////
////////////////////////////////////
// CNewOrder
class CNewOrder :

```

```

        public CTPCC_Common,
        public CComCoClass<CNewOrder,
&CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

        BEGIN_COM_MAP(CNewOrder)
// COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
// HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;};
        HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
};

////////////////////////////////////
////////////////////////////////////
// COrderStatus
class COrderStatus :
public CTPCC_Common,
public CComCoClass<COrderStatus,
&CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

        BEGIN_COM_MAP(COrderStatus)
// COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
        HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
        HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;};
// HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;};
};

```

```

////////////////////////////////////
////////////////////////////////////
////////////////////////////////////
// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment,
    &CLSID_Payment>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
// COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
HRESULT __stdcall NewOrder(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
// HRESULT __stdcall Payment(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
// HRESULT __stdcall StockLevel( VARIANT
    txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
// HRESULT __stdcall OrderStatus(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

////////////////////////////////////
////////////////////////////////////
// CStockLevel
class CStockLevel :
    public CTPCC_Common,
    public CComCoClass<CStockLevel,
    &CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
// COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
HRESULT __stdcall NewOrder(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
// HRESULT __stdcall Payment(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
// HRESULT __stdcall StockLevel( VARIANT
    txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
}

```

```

HRESULT __stdcall OrderStatus(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

## ReadRegistry. cpp

```

/* FILE: READREGISTRY.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * not yet
 * audited
 *
 * PURPOSE: Implementation for TPC-C class.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - first version
 */

/* FUNCTION: ReadTPCCRegistrySettings
 *
 * PURPOSE: This function reads the NT
registry for startup parameters. There parameters are
 * under the TPC key.
 *
 * RETURNS FALSE = no errors
 * TRUE = error reading
registry
 */
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
)
{
    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
        return TRUE;

    // determine database protocol to use;
always has to be ODBC
    pReg->eDB_Protocol = ODBC;
    size = sizeof(szTmp);
    //if ( RegQueryValueEx(hKey, "DB_Protocol",
0, &type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
    //{
        //if ( !strcmp(szTmp,
szDBNames[ODBC]) )

```

```

// pReg->eDB_Protocol =
ODBC;
//}

pReg->eTxnMon = None;
// determine txn monitor to use; may be
either COM, or blank
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "TxnMonitor", 0,
&type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
{
    if ( !strcmp(szTmp,
szTxnMonNames[COM]) )
        pReg->eTxnMon = COM;
}

pReg->bCOM_SinglePool = FALSE;
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey,
"COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, "YES") )
        pReg->bCOM_SinglePool =
TRUE;
}

pReg->dwMaxConnections = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxConnections = dwTmp;

pReg->dwMaxPendingDeliveries = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey,
"MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxPendingDeliveries =
dwTmp;

pReg->dwNumberOfDeliveryThreads = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey,
"NumberOfDeliveryThreads", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwNumberOfDeliveryThreads =
dwTmp;

size = sizeof( pReg->szPath );
if ( RegQueryValueEx(hKey, "Path", 0,
&type, (BYTE *)&pReg->szPath, &size) != ERROR_SUCCESS
)
    pReg->szPath[0] = 0;

size = sizeof( pReg->szDbServer );
if ( RegQueryValueEx(hKey, "DbServer", 0,
&type, (BYTE *)&pReg->szDbServer, &size) !=
ERROR_SUCCESS )

```

```

        pReg->szDbServer[0] = 0;

        size = sizeof( pReg->szDbName );
        if ( RegQueryValueEx(hKey, "DbName", 0,
&type, (BYTE *)&pReg->szDbName, &size) !=
ERROR_SUCCESS )

        pReg->szDbName[0] = 0;

        size = sizeof( pReg->szDbUser );
        if ( RegQueryValueEx(hKey, "DbUser", 0,
&type, (BYTE *)&pReg->szDbUser, &size) !=
ERROR_SUCCESS )

        pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0,
&type, (BYTE *)&pReg->szDbPassword, &size) !=
ERROR_SUCCESS )

        pReg->szDbPassword[0] = 0;

        size = sizeof( pReg->szSPPrefix );
        if ( RegQueryValueEx(hKey, "SPPrefix", 0,
&type, (BYTE *)&pReg->szSPPrefix, &size) !=
ERROR_SUCCESS )

        pReg->szSPPrefix[0] = 'L'\0';

        pReg->dwConnectDelay = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"ConnectDelay", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )

                && (type == REG_DWORD) )

                pReg->dwConnectDelay = dwTmp;

        pReg->bCallNoDuplicatesNewOrder = FALSE;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"CallNoDuplicatesNewOrder", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )

                && (type == REG_DWORD) )

                pReg->bCallNoDuplicatesNewOrder =

dwTmp;

        RegCloseKey(hKey);

        return FALSE;
}

```

## ReadRegistry.h

```

/* FILE: ReadRegistry.h
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not audited
*
* PURPOSE: Header for registry related code.
*
* Change history:

```

```

* 4.20.000 - first version
*/

enum DBPROTOCOL { Unspecified, ODBC };
const char *szDBNames[] = { "Unspecified", "ODBC" };

enum TXNMON { None, COM };
const char *szTxnMonNames[] = { "NONE", "COM" };

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{
        enum DBPROTOCOL eDB_Protocol;
        enum TXNMON eTxnMon;
        BOOL bCOM_SinglePool;
        DWORD dwMaxConnections;
        DWORD dwMaxPendingDeliveries;
        DWORD dwNumberOfDeliveryThreads;
        char szPath[128];
        char szDbServer[32];
        char szDbName[32];
        char szDbUser[32];
        char szDbPassword[32];
        wchar_t szSPPrefix[32];
        //tpcc_odbc.dll stored procedures prefix
        DWORD dwConnectDelay; // delay in
ms to use in pacing connection open and close
        BOOL bCallNoDuplicatesNewOrder; //
whether to check for non-duplicate item ids and call
a different New Order SP
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
);

```

## RESOURCE.H

```

//{{NO_DEPENDENCIES}}
// Microsoft Visual C++ generated include file.
// Used by install.rc
//
#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TPCCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108
#define IDR_LICENSES1 112
#define IDD_DIALOG4 113
#define IDR_TPCCOBJ1 117
#define IDR_TPCCSTUB1 118
#define IDR_ODBC_DLL 123
#define IDR_COM_DLL 126
#define IDR_COMPS_DLL 127
#define IDR_COMALL_DLL 128
#define IDR_COMTYPLIB_DLL 129
#define IDR_MSVC71 130
#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003

```

```

#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_MAXDELIVERIES 1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB 1021
#define IDC_LICENSE 1022
#define IDC_ODBC 1022
#define IDC_CONNECT_POOL 1023
#define ED_DB_SERVER 1023
#define ED_USER_CONNECT_DELAY_TIME 1024
#define ED_DB_USER_ID 1024
#define IDC_MTS 1025
#define IDC_TM_MTS 1025
#define IDC_TM_TUXEDO 1026
#define IDC_TM_NONE 1027
#define ED_DB_PASSWORD 1028
#define ED_DB_NAME 1029
#define IDC_TM_ENCINA 1030

```

// Next default values for new objects

```

//
#ifdef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 131
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1031
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

## tpcc.cpp

```

/* FILE: TPCC.C
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Main module for TPCC.DLL which is
an ISAPI service dll.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - reworked error
handling; added options for COM and Encina txn
monitors
*/

```



```

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"

#include "..\..\common\txnlog\include\rtetime.h"
#include "..\..\common\txnlog\include\spinlock.h"
#include "..\..\common\txnlog\include\txnlog.h"

// Database layer includes
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

// Txn monitor layer includes
#include "..\..\tm_com_dll\src\tpcc_com.h"
// COM Services implementation on
TPC-C txns

#include "httpext.h"
//ISAPI DLL information header
#include "tpcc.h"
//this dlls specific structure, value e.t.
header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish
input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char
szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version
level of this web client interface.

```

```

// The RTE must be synchronized with the interface
level on login, otherwise the login
// will fail. This is a sanity check to catch
problems resulting from mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "420"

static CRITICAL_SECTION
TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog
*txnDelilog = NULL;
//used to log delivery transaction
information

HANDLE hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE hDoneEvent =
INVALID_HANDLE_VALUE;
HANDLE *pDeliHandles = NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection;
//critical section for delivery
transactions cache
DELIVERY_TRANSACTION *pDelBuff
= NULL;

DWORD dwDelBuffSize = 100;
// size of circular buffer for delivery

txns
DWORD dwDelBuffFreeCount;
// number of buffers free

DWORD dwDelBuffBusyIndex = 0; //
index position of entry waiting to be delivered
DWORD dwDelBuffFreeIndex = 0; //
index position of unused entry

// Critical section to synchronize connection open
and close.
//
CRITICAL_SECTION hConnectCriticalSection;

#include "..\..\common\src\ReadRegistry.cpp"

```

```

/* FUNCTION: DllMain
*
* PURPOSE: This function is the entry point
for the DLL. This implementation is based on the
fact that
DLL_PROCESS_ATTACH is only called from the inet
service once.
*
* ARGUMENTS: HANDLE hModule
module handle
DWORD
ul_reason_for_call reason for call
LPVOID
lpReserved
reserved for future use
*
* RETURNS: BOOL FALSE
errors occurred in
initialization
*
TRUE DLL
successfully initialized
*/

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
DWORD i;
char szEvent[LEN_ERR_STRING] = "\0";
char szLogFile[128];
char szDllName[128];

// debugging...
// DebugBreak();

try
{
switch( ul_reason_for_call )
{
case
DLL_PROCESS_ATTACH:
{
DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
GetComputerName(szMyComputerName, &dwSize);
szMyComputerName[dwSize] = 0;
}
DisableThreadLibraryCalls((HMODULE)hModule)
;
InitializeCriticalSection(&TermCriticalSection);
if (
ReadTPCCRegistrySettings( &Reg ) )
throw new CWEBCLNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );
}
}
}

```

```

        dwDelBuffSize
= min( Reg.dwMaxPendingDeliveries, 10000 ); // min
with 10000 as a sanity constraint

        dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with
100 as a sanity constraint

        TermInit();

        if
(Reg.eTxnMon == COM)
        {
            strcpy( szDllName, Reg.szPath );
            strcat( szDllName, "tpcc_com.dll");

            hLibInstanceTm = LoadLibrary( szDllName );
            if
(hLibInstanceTm == NULL)
                throw new CWBCLNT_ERR( ERR_LOADDLL_FAILED,
szDllName, GetLastError() );

            //
get function pointer to wrapper for class constructor
            pCTPCC_COM_new = (TYPE_CTPCC_COM*)
GetProcAddress(hLibInstanceTm, "CTPCC_COM_new");
            if
(pCTPCC_COM_new == NULL)
                throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );

            // load DLL
            if
((Reg.eTxnMon == None) || (dwNumDeliveryThreads > 0))
            {
                if
(Reg.eDB_Protocol == ODBC)
                {
                    strcpy( szDllName, Reg.szPath );
                    strcat( szDllName, "tpcc_odbc.dll");

                    hLibInstanceDb = LoadLibrary( szDllName );
                    if (hLibInstanceDb == NULL)
                        throw new CWBCLNT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                    // get function pointer to wrapper for
class constructor
                    pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");

```

```

        if (pCTPCC_ODBC_new == NULL)
            throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
        }
    }

    // Check
whether Service Pack 1 has been installed if
running on
Windows Server 2003. The RTM version has
// a
limitation on concurrent HTTP connections.
//
    OSVERSIONINFOEX    VersionInfo;

    VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
    if
(GetVersionEx((LPOSVERSIONINFO)&VersionInfo))
    {
        if
(VersionInfo.dwMajorVersion == 5 && // Windows
2000/2003 Server?
        VersionInfo.dwMinorVersion == 2 && //
Windows 2003 Server?
        VersionInfo.wServicePackMajor == 0) //
Service Pack installed?
        {
            TCHAR szMsg[256];

            _sntprintf(szMsg, sizeof(szMsg),
                    "\nRunning on
Windows Server 2003 without at least Service Pack
1\n"
                    "limits the
number of concurrent HTTP connections to around
8000");

            // Use event logging to log the error.
            //
            HANDLE    hEventSource =
RegisterEventSource(NULL, TEXT("TPCC.DLL"));

            LPTSTR    lpszStrings[1] = { szMsg };

            if (hEventSource != NULL)

```

```

        {
            ReportEvent(hEventSource, //
handle of event source
            EVENTLOG_WARNING_TYPE,
            // event type
            0,
            // event category
            0,
            // event ID
            NULL,
            // current user's SID
            1,
            // strings in lpszStrings
            0,
            // no bytes of raw data
            (LPCTSTR *)lpszStrings,
            // array of error strings
            NULL);
            // no raw data
            (VOID)
DeregisterEventSource(hEventSource);
        }
    }

    if
(dwNumDeliveryThreads)
    {
        Initialize delivery delay critical section
        //
        InitializeCriticalSection(&hConnectCritical
Section);
        //
for deferred delivery txns:
        hDoneEvent = CreateEvent( NULL, TRUE /*
manual reset */, FALSE /* initially not signalled */,
NULL );
        InitializeCriticalSection(&DelBuffCriticalS
ection);
        hWorkerSemaphore = CreateSemaphore( NULL,
0, dwDelBuffSize, NULL );
    }
}

```

```

        dwDelBuffFreeCount = dwDelBuffSize;

        InitJulianTime(NULL);

        //
        // create unique log file name based on delilog-yyymmdd-
        // hhmm.log
        SYSTEMTIME Time;
        GetLocalTime( &Time );

        wsprintf( szLogFile, "%sdelivery-
        %2.2d%2.2d%2.2d-%2.2d%2.2d-%2.2ds%2.2dms.log",
        Reg.szPath, Time.wYear % 100, Time.wMonth,
        Time.wDay, Time.wHour, Time.wMinute, Time.wSecond,
        Time.wMilliseconds );

        txnDelilog = new CTxnLog(szLogFile,
        TXN_LOG_WRITE);

        //write event into txn log for START
        txnDelilog-
        >WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName,
        sizeof(szMyComputerName));

        //
        // allocate structures for delivery buffers and thread
        // mgmt
        pDeliHandles = new
        HANDLE[dwNumDeliveryThreads];
        pDelBuff = new
        DELIVERY_TRANSACTION[dwDelBuffSize];

        //
        // launch DeliveryWorkerThread to perform actual
        // delivery txns
        for(i=0; i<dwNumDeliveryThreads; i++)
        {
            pDeliHandles[i] = (HANDLE) _beginthread(
            DeliveryWorkerThread, 0, NULL );

            if (pDeliHandles[i] ==
            INVALID_HANDLE_VALUE)
            {
                throw new CWEBCLNT_ERR(
                ERR_DELIVERY_THREAD_FAILED );
            }
        }
        break;

        case
        DLL_PROCESS_DETACH:
            if
            {
                if
                {
                    //write event into txn log for STOP
                    txnDelilog-
                    >WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName,
                    sizeof(szMyComputerName));

                    // This will do a clean shutdown of the
                    // delivery log file
                    CTxnLog *txnDelilogLocal = txnDelilog;
                    txnDelilog= NULL;
                    delete txnDelilogLocal;

                    delete [] pDeliHandles;
                    delete [] pDelBuff;

                    CloseHandle( hWorkerSemaphore );
                    CloseHandle( hDoneEvent );
                    DeleteCriticalSection(&DelBuffCriticalSection);

                    //
                    // Delete delivery delay critical section
                    //
                    DeleteCriticalSection(&hConnectCriticalSection);
                }
                DeleteCriticalSection(&TermCriticalSection);
            }

            if
            {
                if (hLibInstanceTm != NULL)
                    FreeLibrary( hLibInstanceTm );
                hLibInstanceTm = NULL;

                if
                {
                    if (hLibInstanceDb != NULL)
                        FreeLibrary( hLibInstanceDb );
                    hLibInstanceDb = NULL;

                    Sleep(500);
                    break;
                }
                default: /* nothing
                */
            }
            }
            catch (CBaseErr *e)
            {
                TCHAR szMsg[256];
                _sntprintf(szMsg, sizeof(szMsg),
                "%s error, code %d: %s",
                e-
                >ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
                WriteMessageToEventLog( szMsg );
                delete e;
                TerminateExtension(0);
                return FALSE;
            }
            catch (...)
            {
                WriteMessageToEventLog(TEXT("Unhandled
                exception. DLL could not load.));
                TerminateExtension(0);
                return FALSE;
            }
        }
        return TRUE;

        /* FUNCTION: GetExtensionVersion
        *
        * PURPOSE: This function is called by the
        * inet service when the DLL is first loaded.
        *
        * ARGUMENTS: HSE_VERSION_INFO *pVer
        * passed in structure in which to place
        * expected version number.
        *
        * RETURNS: TRUE inet service
        * expected return value.
        */
        BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO
        *pVer)
        {
            pVer->dwExtensionVersion =
            MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
            lstrcpy(pVer->lpszExtensionDesc, "TPC-C
            Server.", HSE_MAX_EXT_DLL_NAME_LEN);

            return TRUE;
        }

        /* FUNCTION: TerminateExtension
        *
        * PURPOSE: This function is called by the
        * inet service when the DLL is about to be unloaded.

```

```

*                               Release all resources
in anticipation of being unloaded.
*
* RETURNS:                       TRUE      inet service
expected return value.
*/

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for( DWORD i=0;
i<dwNumDeliveryThreads; i++)
            WaitForSingleObject(
pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
*
* PURPOSE:                       This function is the main entry
point for the TPCC DLL. The internet service
*                               calls this function
passing in the http string.
*
* ARGUMENTS:                     EXTENSION_CONTROL_BLOCK
*pECB      structure pointer to passed in
internet
*
*                               service information.
*
* RETURNS:                       DWORD
HSE_STATUS_SUCCESS
error      connection can be dropped if
*
HSE_STATUS_SUCCESS_AND_KEEP_CONN
keep connect valid comment sent
*
* COMMENTS:                       None
*/

DWORD WINAPI
HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int      TermId,
iSyncId;
    char     szBuffer[4096];

    int      lpbSize;
    static char szHeader[] = "200 Ok";
    DWORD     dwSize = 6;
    // initial value is strlen(szHeader)
    char     szHeader1[4096];
    DWORD     dwAddr; // used to
store Win32 exception address

```

```

LPEXCEPTION_POINTERS
pExceptionInfo; // pointer to Win32
exception info

#ifdef ICECAP
StartCAP();
#endif

// Use structured exception handling for
Win32 exceptions
//
try
{
    ProcessCommand(pECB, szBuffer,
TermId, iSyncId);
}
except (
pExceptionInfo =
GetExceptionInformation(), // can call
GetExceptionInformation only in filter (not handler)
dwAddr =
(DWORD)pExceptionInfo->ExceptionRecord-
>ExceptionAddress, // save the address

EXCEPTION_EXECUTE_HANDLER) // handle all
exceptions
{
    char
szMsg[512];
    int
iLen;

    MEMORY_BASIC_INFORMATION mbi ;
    VirtualQuery( (void*)dwAddr,
&mbi, sizeof( mbi ) );
    DWORD hInstance =
(DWORD)mbi.AllocationBase ;

    iLen = wsprintf(szMsg,
TEXT("Unhandled exception (0x%x) in Web Client's
HttpExtensionProc. "
"Occured at
address 0x%x, base 0x%x, tpcc_com.dll at 0x%x, tpcc.dll
at 0x%x, tpcc_com_all.dll at 0x%x"),
GetExceptionCode(), dwAddr, hInstance,
GetModuleHandle("tpcc_com.dll"),
GetModuleHandle("tpcc.dll"),
GetModuleHandle("tpcc_com_all.dll"));

    if (txnDelilog != NULL)
    {
        txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_WARNING, szMsg, iLen +
1);
    }
    ErrorForm( pECB, ERR_TYPE_WEBDLL,
GetExceptionCode(), TermId, iSyncId, szMsg, szBuffer
);
}

```

```

#ifdef ICECAP
StopCAP();
#endif

lpbSize = strlen(szBuffer);
dwSize += lpbSize;
dwSize += wsprintf(szHeader1,
"Content-Type:
text/html\r\n"
"Content-Length:
%d\r\n"
"Connection: Keep-
Alive\r\n\r\n", lpbSize);
strcat( szHeader1, szBuffer );

(*pECB->ServerSupportFunction)(pECB-
>ConnID, HSE_REQ_SEND_RESPONSE_HEADER, szHeader,
(LPDWORD) &dwSize, (LPDWORD)szHeader1);

//finish up and keep connection
pECB->dwHttpStatusCode = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

/* FUNCTION: ProcessCommand
*
* PURPOSE:                       This function parses the commands
from the driver and executes corresponding
transactions.
*
* ARGUMENTS:                     EXTENSION_CONTROL_BLOCK
*pECB      structure pointer to passed in
internet
*
*                               service information.
*
* RETURNS:                       None (outputs into the
szBuffer parameter).
*
* COMMENTS:                       Separated from HttpExtensionProc
to be able to use structured exception handling in
*
HttpExtensionProc (cannot mix C++ and Win32
exceptions in one functions).
*/
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId)
{
    int      iCmd, FormId;

    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd,
&FormId, &TermId, &iSyncId);

        if (TermId != 0)
        {
            if ( TermId < 0 ||
TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )

```

```

        {
            //
            debugging...
            char
            szTmp[128];
            wsprintf(
            szTmp, "Invalid term ID; TermId = %d", TermId );
            WriteMessageToEventLog( szTmp );
            throw new
            CWEBCLNT_ERR( ERR_INVALID_TERMID );
        }
        //must have a valid
        syncid here since termid is valid
        if (iSyncId !=
        Term.pClientData[TermId].iSyncId)
            throw new
            CWEBCLNT_ERR( ERR_INVALID_SYNC_CONNECTION );
        //set use time
        Term.pClientData[TermId].iTickCount =
        GetTickCount();
    }
    switch(iCmd)
    {
    case 0:
        WelcomeForm(pECB,
        szBuffer);
        break;
    case 1:
        switch( FormId )
        {
        case WELCOME_FORM:
        case MAIN_MENU_FORM:
            break;
        case NEW_ORDER_FORM:
            ProcessNewOrderForm(pECB, TermId,
            szBuffer);
            break;
        case PAYMENT_FORM:
            ProcessPaymentForm(pECB, TermId, szBuffer);
            break;
        case DELIVERY_FORM:
            ProcessDeliveryForm(pECB, TermId,
            szBuffer);
            break;
        case ORDER_STATUS_FORM:
            ProcessOrderStatusForm(pECB, TermId,
            szBuffer);
            break;
        case STOCK_LEVEL_FORM:
            ProcessStockLevelForm(pECB, TermId,
            szBuffer);
        }
    }
}

```

```

        break;
    }
    case 2:
        // new-order selected
        from menu; display new-order input form
        MakeNewOrderForm(TermId, NULL, INPUT_FORM,
        szBuffer);
        break;
    case 3:
        // payment selected
        from menu; display payment input form
        MakePaymentForm(TermId,
        NULL, INPUT_FORM, szBuffer);
        break;
    case 4:
        // delivery selected
        from menu; display delivery input form
        MakeDeliveryForm(TermId, NULL, INPUT_FORM,
        szBuffer);
        break;
    case 5:
        // order-status
        selected from menu; display order-status input form
        MakeOrderStatusForm(TermId, NULL,
        INPUT_FORM, szBuffer);
        break;
    case 6:
        // stock-level selected
        from menu; display stock-level input form
        MakeStockLevelForm(TermId, NULL,
        INPUT_FORM, szBuffer);
        break;
    case 7:
        // ExitCmd
        TermDelete(TermId);
        WelcomeForm(pECB,
        szBuffer);
        break;
    case 8:
        SubmitCmd(pECB,
        szBuffer);
        break;
    case 9:
        // menu
        MakeMainMenuForm(TermId,
        Term.pClientData[TermId].iSyncId, szBuffer);
        break;
    case 10:
        // CMD=Clear
        // resets all
        connections; should only be used when no other
        connections are active
        TermDeleteAll();
        TermInit();
        WelcomeForm(pECB,
        szBuffer);
        break;
}

```

```

        case 11: // CMD=Stats
            StatsCmd(pECB,
            szBuffer);
            break;
        }
    }
    catch (CBaseErr *e)
    {
        ErrorForm( pECB, e->ErrorType(),
        e->ErrorNum(), TermId, iSyncId, e->ErrorText(),
        szBuffer );
        delete e;
    }
}
void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];
    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
    TEXT("TPCC.DLL"));
    _stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;
    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
        source
            EVENTLOG_ERROR_TYPE, // event type
            0, // event category
            0, // event ID
            NULL, // current user's
            SID
            2, // strings in
            lpszStrings
            0, // no bytes of raw
            data
            (LPCTSTR *)lpszStrings, // array of
            error strings
            NULL); // no raw data
        (VOID) DeregisterEventSource(hEventSource);
    }
}
/* FUNCTION: DeliveryWorkerThread
 *
 * PURPOSE: This function processes deferred
            delivery txns. There are typically several
            threads running this
            routine. The number of threads is determined by an
            entry
            * read from the registry.
            The thread waits for work by waiting on semaphore.
            * When a delivery txn is
            posted, the semaphore is released. After processing

```

```

*           the delivery txn,
information is logged to record the txn status and
execution
*           time.
*/

/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE          *pTxn = NULL;

    DELIVERY_TRANSACTION
    delivery;
    PDELIVERY_DATA
    pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF    txnDeliRec;

    DWORD
    index;
    HANDLE
    handles[2];

    SYSTEMTIME          trans_end;
    //delivery transaction finished
time
    SYSTEMTIME          trans_start;
    //delivery transaction start time

    assert(txnDeliLog != NULL);

    try
    {
        if (Reg.eDB_Protocol == ODBC)
        {
            if (Reg.dwConnectDelay
                > 0)
            {
                //
                Synchronize connect (for VIA)
                //
                EnterCriticalSection(&hConnectCriticalSection);

                Sleep(Reg.dwConnectDelay);

                LeaveCriticalSection(&hConnectCriticalSection);
            }

            pTxn = pCTPCC_ODBC_new(
                Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
                szMyComputerName, Reg.szDbName,
                Reg.szSPPrefix,
                Reg.bCallNoDuplicatesNewOrder );
            pDeliveryData = pTxn-
            >BuffAddr_Delivery();
        }
    }

```

```

        catch (CBaseErr *e)
        {
            char szTmp[1024];
            wsprintf( szTmp, "Error in
            Delivery Txn thread. Could not connect to database.
            "
                "%s.
                Server=%s, User=%s, Password=%s, Database=%s",
                e-
                >ErrorText(), Reg.szDbServer, Reg.szDbUser,
                Reg.szDbPassword, Reg.szDbName );
            WriteMessageToEventLog( szTmp );
            delete e;
            goto ErrorExit;
        }
        catch (...)
        {
            WriteMessageToEventLog(TEXT("Unhandled
            exception caught in DeliveryWorkerThread.));
            goto ErrorExit;
        }

        while (TRUE)
        {
            try
            {
                //while delivery thread
                running, i.e. user has not requested termination
                while (TRUE)
                {
                    // need to
                    wait for multiple objects: program exit or worker
                    semaphore;
                    hDoneEvent;
                    handles[0] =
                    hWorkerSemaphore;
                    handles[1] =
                    index =
                    WaitForMultipleObjects( 2, &handles[0], FALSE,
                    INFINITE );
                    if (index ==
                    WAIT_OBJECT_0)
                    goto ErrorExit;

                    ZeroMemory(&txnDeliRec,
                    sizeof(txnDeliRec));

                    txnDeliRec.TxnType =
                    TXN_REC_TYPE_TPCC_DELIV_DEF;

                    // make a
                    local copy of current entry from delivery buffer and
                    increment buffer index
                    EnterCriticalSection(&DelBuffCriticalSection);
                    delivery =
                    *(pDelBuff+dwDelBuffBusyIndex);

                    dwDelBuffFreeCount++;
                }
            }
        }

```

```

            dwDelBuffBusyIndex++;
            if
            (dwDelBuffBusyIndex == dwDelBuffSize) // wrap-
            around if at end of buffer

            dwDelBuffBusyIndex = 0;

            LeaveCriticalSection(&DelBuffCriticalSection);
        n);

        pDeliveryData->w_id = delivery.w_id;

        pDeliveryData->o_carrier_id =
        delivery.o_carrier_id;

        txnDeliRec.w_id = pDeliveryData->w_id;

        txnDeliRec.o_carrier_id = pDeliveryData-
        >o_carrier_id;

        txnDeliRec.TxnStartT0 =
        Get64BitTime(&delivery.queue);

        &trans_start );
        GetLocalTime(
        pTxn-
        >Delivery();
        GetLocalTime(
        &trans_end );

        //log txn

        txnDeliRec.TxnStatus = ERR_SUCCESS;
        for (int i=0;
        i<10; i++)

        txnDeliRec.o_id[i] = pDeliveryData-
        >o_id[i];

        txnDeliRec.DeltaT4 =
        (int)(Get64BitTime(&trans_end) -
        txnDeliRec.TxnStartT0);

        txnDeliRec.DeltaTxnExec =
        (int)(Get64BitTime(&trans_end) -
        Get64BitTime(&trans_start));

        if
        (txnDeliLog != NULL)
        txnDeliLog->WriteToLog(&txnDeliRec);
    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "%s
        Error (code %d) in Delivery Txn thread. %s",

```

```

e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText() );
WriteMessageToEventLog(
szTmp );

// log the error txn
txnDeliRec.TxnStatus =
e->ErrorType();
if (txnDeliLog != NULL)
WriteToLog(&txnDeliRec);
delete e;
}
catch (...)
{
// unhandled exception;
shouldn't happen; not much we can do...
WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
}
}
ErrorExit:
if (Reg.dwConnectDelay > 0)
{
// Synchronize disconnect (for
VIA)
//
EnterCriticalSection(&hConnectCriticalSecti
on);
Sleep(Reg.dwConnectDelay);
}
delete pTxn;
if (Reg.dwConnectDelay > 0)
{
// Synchronize disconnect (for
VIA)
//
LeaveCriticalSection(&hConnectCriticalSecti
on);
}
_endthread();
}
/* FUNCTION: PostDeliveryInfo
*
* PURPOSE: This function enters the delivery
txn into the deferred delivery buffer.
*
* RETURNS: BOOL FALSE
delivery information posted successfully
*
TRUE error cannot post delivery info
*/

```

```

BOOL PostDeliveryInfo(long w_id, short o_carrier_id)
{
BOOL bError;
EnterCriticalSection(&DelBuffCriticalSectio
n);
if (dwDelBuffFreeCount > 0)
{
bError = FALSE;
(pDelBuff+dwDelBuffFreeIndex)-
= w_id;
(pDelBuff+dwDelBuffFreeIndex)-
= o_carrier_id;
GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)
->queue);
dwDelBuffFreeCount--;
dwDelBuffFreeIndex++;
if (dwDelBuffFreeIndex ==
dwDelBuffSize)
dwDelBuffFreeIndex = 0;
// wrap-around if at end of
buffer
}
else
// No free buffers. Return an
error, which indicates that the delivery buffer is
full.
// Most likely, the number of
delivery worker threads needs to be increased to keep
up
// with the txn rate.
bError = TRUE;
LeaveCriticalSection(&DelBuffCriticalSectio
n);
if (!bError)
// increment worker semaphore to
wake up a worker thread
ReleaseSemaphore(
hWorkerSemaphore, 1, NULL );
}
return bError;
}
/* FUNCTION: ProcessQueryString
*
* PURPOSE: This function extracts the
relevant information out of the http command passed
in from
the browser.
*
* COMMENTS: If this is the initial connection
i.e. client is at welcome screen then
there will
not be a terminal id or current form id. If this is
the case
then the
pTermid and pFormid return values are undefined.
*/

```

```

void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId)
{
char *ptr = pECB->lpszQueryString;
char szBuffer[25];
int i;
//allowable client command strings i.e.
CMD=command
static char *szCmds[] =
{
"Process", "..NewOrder..",
"..Payment..", "..Delivery..", "..Order-Status..",
"..Stock-Level..",
"..Exit..", "Submit", "Menu",
"Clear", "Stats", ""
};
*pCmd = 0; // default is
the login screen
*pTermId = 0;
// if no params (i.e., empty query string),
then return login screen
if (strlen(pECB->lpszQueryString) == 0)
return;
// parse FORMID, TERMID, and SYNCID
*pFormId = GetIntKeyValue(&ptr, "FORMID",
NO_ERR, NO_ERR);
*pTermId = GetIntKeyValue(&ptr, "TERMID",
NO_ERR, NO_ERR);
*pSyncId = GetIntKeyValue(&ptr, "SYNCID",
NO_ERR, NO_ERR);
// parse CMD
GetKeyValue(&ptr, "CMD", szBuffer,
sizeof(szBuffer), ERR_COMMAND_UNDEFINED);
// see which command it matches
for(i=0; i++)
{
if (szCmds[i][0] == 0)
// no more; no match;
return error
throw new CWEBCLNT_ERR(
ERR_COMMAND_UNDEFINED );
if (!strcmp(szCmds[i], szBuffer)
)
{
*pCmd = i+1;
break;
}
}
}
/* FUNCTION: void WelcomeForm
*
*/
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)

```

```

{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this
    is first form client sees.
    strcpy( szBuffer,
        "<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"

        "<B><BIG>Microsoft TPC-C Web Client (ver
4.20)</BIG></B> <BR> <BR>"

        "<font face=\\"Courier New\\"><PRE>"

        "Compiled: \"__DATE__\", \"__TIME__\" <BR>"

        "Source:  \"__FILE__\" ( \"__TIMESTAMP__\" )
<BR>"

        "</PRE></font>"

        "<FORM ACTION=\\"tpcc.dll\" METHOD=\\"GET\\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"STATUSID\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"ERROR\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"FORMID\"
VALUE=\\"1\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"TERMINID\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"SYNCID\"
VALUE=\\"0\">"

        "<INPUT TYPE=\\"hidden\" NAME=\\"VERSION\"
VALUE=\\" \" WEBCLIENT_VERSION \">"
        );

    sprintf( szTmp,
        "Configuration
Settings: <BR><font face=\\"Courier New\\"
color=\\"blue\"><PRE>"

        "Txn Monitor          = <B>%s</B><BR>"

        "Database protocol      = <B>%s</B><BR>"

        "Max Connections        = <B>%d</B><BR>"
        "#
of Delivery Threads = <B>%d</B><BR>"

        "Max Pending Deliveries = <B>%d</B><BR>"

        ,
        szTxnMonNames[Reg.eTxnMon],
        szDBNames[Reg.eDB_Protocol],
        Reg.dwMaxConnections,
        dwNumDeliveryThreads, dwDelBuffSize );
    strcat( szBuffer, szTmp);

    if (Reg.eTxnMon == COM)

```

```

{
    sprintf( szTmp,
        "COM Single
Pool          = <B>%s</B><BR>",
        Reg.bCOM_SinglePool ?
        "YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>");

if (Reg.eTxnMon == None)
    // connection options may be
    specified when not using a txn monitor
    sprintf( szTmp,
        "Please enter
your database options for this connection:<BR>"

        "<font face=\\"Courier New\\"
color=\\"blue\"><PRE>"

        "DB Server          = <INPUT NAME=\\"db_server\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "DB User ID         = <INPUT NAME=\\"db_user\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "DB Password        = <INPUT NAME=\\"db_passwd\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "DB Name             = <INPUT NAME=\\"db_name\"
SIZE=20 VALUE=\\"%s\"><BR>"

        "</PRE></font>"

        ,
        Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
        Reg.szDbName );
    else
        // if using a txn monitor,
        connection options are determined from registry;
        can't
        // set per user. show options
        fyi
        sprintf( szTmp,
            "Database
options which will be used by the transaction
monitor:<BR>"

            "<font face=\\"Courier New\\"
color=\\"blue\"><PRE>"

            "DB Server          = <B>%s</B><BR>"

            "DB User ID         = <B>%s</B><BR>"

            "DB Password        = <B>%s</B><BR>"

            "DB Name             = <B>%s</B><BR>"

            "</PRE></font>"

            ,
            Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
            Reg.szDbName );
    strcat( szBuffer, szTmp);

    sprintf( szTmp,
        "Please enter your
Warehouse and District for this session:<BR>"

```

```

        "<font face=\\"Courier New\\"
color=\\"blue\"><PRE>" );
    strcat( szBuffer, szTmp);
    strcat( szBuffer,
        "Warehouse ID = <INPUT
NAME=\\"w_id\" SIZE=6><BR>"

        "District ID = <INPUT NAME=\\"d_id\"
SIZE=2><BR>"

        "</PRE></font><HR>"

        "<INPUT TYPE=\\"submit\" NAME=\\"CMD\"
VALUE=\\"Submit\">"

        "</FORM></BODY></HTML>");
}

/* FUNCTION: SubmitCmd
 *
 * PURPOSE: This function allocated a new
terminal id in the Term structure array.
 *
 */

void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int          iNewTerm;
    char         *ptr = pECB->lpszQueryString;

    char         szVersion[32]   = { 0 };
    char         szServer[32]    = { 0 };
    char         szUser[32]      =
    "sa";
    char         szPassword[32]  = { 0 };
    char         szDatabase[32]  = "tpcc";

    // validate version field; the version
    field ensures that the RTE is synchronized with the
    web client
    GetKeyValue(&ptr, "VERSION", szVersion,
    sizeof(szVersion), ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION )
)
        throw new CWBCLNT_ERR(
        ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server",
        szServer, sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user",
        szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd",
        szPassword, sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name",
        szDatabase, sizeof(szDatabase), NO_ERR);
    }
}

```



```

// parse warehouse ID
int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
if ( w_id < 1 )
    throw new CWEBCLNT_ERR(
ERR_W_ID_INVALID );

// parse district ID
int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
if ( d_id < 1 || d_id > 10 )
    throw new CWEBCLNT_ERR(
ERR_D_ID_INVALID );

iNewTerm = TermAdd();

Term.pClientData[iNewTerm].w_id = w_id;
Term.pClientData[iNewTerm].d_id = d_id;

try
{
    if (Reg.eTxnMon == COM)

        Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
    else if (Reg.eDB_Protocol ==
ODBC)

        Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword,
szMyComputerName,

szDatabase, Reg.szSPPrefix,

Reg.bCallNoDuplicatesNewOrder );
}
catch (...)
{
    TermDelete(iNewTerm);
    throw; // pass
exception upward
}

MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
}

/* FUNCTION: StatsCmd
 *
 * PURPOSE: This function returns to the
browser the total number of active terminal ids.
 * This routine is for
development/debugging purposes.
 */

```

```

void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int i;
    int iTotals;

    EnterCriticalSection(&TermCriticalSection);

    iTotals = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)

            iTotals++;

    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,

"<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>"

"<BODY><B><BIG> Total
Active Connections: %d </B><BR></BODY></HTML>"
, iTotals );
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_COMMAND_UNDEFINED,

"Command undefined."

},

{ ERR_D_ID_INVALID,

"Invalid District ID Must be 1 to 10."

},

},

ERR_DELIVERY_CARRIER_ID_RANGE,
"Delivery Carrier ID out of range
must be 1 - 10."
},

{
ERR_DELIVERY_CARRIER_INVALID,
"Delivery Carrier ID invalid must be
numeric 1 - 10."
},

{
ERR_DELIVERY_MISSING_OCD_KEY,
"Delivery missing Carrier ID key \"OCD*\"."

},

},

ERR_DELIVERY_THREAD_FAILED,
"Could not start delivery worker
thread."

},

{
ERR_GETPROCADDR_FAILED,

```

```

"Could not map proc in DLL. GetProcAddr
error. DLL="

{ ERR_HTML_ILL_FORMED,

},

"Required key field is missing from HTML
string."

{
ERR_INVALID_SYNC_CONNECTION,
"Invalid Terminal Sync ID."

},

{
ERR_INVALID_TERMINID,

},

"Invalid Terminal ID."

},

{
ERR_LOADDLL_FAILED,

},

"Load of DLL failed. DLL="

},

{
ERR_MAX_CONNECTIONS_EXCEEDED,
"No connections available. Max Connections
is probably too low."
},

{
ERR_MISSING_REGISTRY_ENTRIES,
"Required registry entries are missing.
Rerun INSTALL to correct."
},

{
ERR_NEWORDER_CUSTOMER_INVALID,
"New Order customer id invalid
data type, range = 1 to 3000."
},

{
ERR_NEWORDER_CUSTOMER_KEY,
"New Order missing Customer key
\"CID*\"."

},

{
ERR_NEWORDER_DISTRICT_INVALID,
"New Order District ID Invalid
range 1 - 10."

},

{
ERR_NEWORDER_FORM_MISSING_DID,
"New Order missing District key
\"DID*\"."

},

{
ERR_NEWORDER_ITEMID_INVALID,
"New Order Item Id is wrong data type, must
be numeric."
},

{
ERR_NEWORDER_ITEMID_RANGE,
"New Order Item Id is out of
range. Range = 1 to 99999."
},

{
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
"New Order Item_Id field entered without a
corresponding Supp_W."
},

{
ERR_NEWORDER_MISSING_IID_KEY,
"New Order missing Item Id key \"IID*\"."
}

```

```

    },
    {
        ERR_NEWORDER_MISSING_QTY_KEY,
        "New Order Missing Qty key \"Qty##*\"."
    },
    {
        ERR_NEWORDER_MISSING_SUPPW_KEY,
        "New Order missing Supp_W key
        \"SP##*\"."
    },
    {
        ERR_NEWORDER_NOITEMS_ENTERED,
        "New Order No order lines entered."
    },
    {
        ERR_NEWORDER_QTY_INVALID,
        "New Order Qty invalid must be
        numeric range 1 - 99."
    },
    {
        ERR_NEWORDER_QTY_RANGE,
        "New Order Qty is out of range. Range = 1
        to 99."
    },
    {
        ERR_NEWORDER_QTY_WITHOUT_SUPPW,
        "New Order Qty field entered
        without a corresponding Supp_W."
    },
    {
        ERR_NEWORDER_SUPPW_INVALID,
        "New Order Supp_W invalid data
        type must be numeric."
    },
    {
        ERR_NO_SERVER_SPECIFIED,
        "No Server name specified."
    },
    {
        ERR_ORDERSTATUS_CID_AND_CLT,
        "Order Status Only Customer ID or Last Name
        may be entered, not both."
    },
    {
        ERR_ORDERSTATUS_CID_INVALID,
        "Order Status Customer ID invalid, range
        must be numeric 1 - 3000."
    },
    {
        ERR_ORDERSTATUS_CLT_RANGE,
        "Order Status Customer last name
        longer than 16 characters."
    },
    {
        ERR_ORDERSTATUS_DID_INVALID,
        "Order Status District invalid, value must
        be numeric 1 - 10."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_CLT,
        "Order Status Either Customer ID or Last
        Name must be entered."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_KEY,
        "Order Status missing Customer key

```

```

        \"CID*\"."
    },
    {
        ERR_ORDERSTATUS_MISSING_CLT_KEY,
        "Order Status missing Customer Last Name
        key \"CLT*\"."
    },
    {
        ERR_ORDERSTATUS_MISSING_DID_KEY,
        "Order Status missing District key
        \"DID*\"."
    },
    {
        ERR_PAYMENT_CDI_INVALID,
        "Payment Customer district
        invalid must be numeric."
    },
    {
        ERR_PAYMENT_CID_AND_CLT,
        "Payment Only Customer ID or Last
        Name may be entered, not both."
    },
    {
        ERR_PAYMENT_CUSTOMER_INVALID,
        "Payment Customer data type invalid, must
        be numeric."
    },
    {
        ERR_PAYMENT_CWI_INVALID,
        "Payment Customer Warehouse
        invalid, must be numeric."
    },
    {
        ERR_PAYMENT_DISTRICT_INVALID,
        "Payment District ID is invalid, must be 1
        - 10."
    },
    {
        ERR_PAYMENT_HAM_INVALID,
        "Payment Amount invalid data type
        must be numeric."
    },
    {
        ERR_PAYMENT_HAM_RANGE,
        "Payment Amount out of range, 0 - 9999.99."
    },
    {
        ERR_PAYMENT_LAST_NAME_TO_LONG,
        "Payment Customer last name
        longer than 16 characters."
    },
    {
        ERR_PAYMENT_MISSING_CDI_KEY,
        "Payment missing Customer district key
        \"CDI*\"."
    },
    {
        ERR_PAYMENT_MISSING_CID_CLT,
        "Payment Either Customer ID or Last Name
        must be entered."
    },
    {
        ERR_PAYMENT_MISSING_CID_KEY,
        "Payment missing Customer Key \"CID*\"."
    },

```

```

    {
        ERR_PAYMENT_MISSING_CLT_KEY,
        "Payment missing Customer Last Name key
        \"CLT*\"."
    },
    {
        ERR_PAYMENT_MISSING_CWI_KEY,
        "Payment missing Customer Warehouse key
        \"CWI*\"."
    },
    {
        ERR_PAYMENT_MISSING_DID_KEY,
        "Payment missing District Key \"DID*\"."
    },
    {
        ERR_PAYMENT_MISSING_HAM_KEY,
        "Payment missing Amount key \"HAM*\"."
    },
    {
        ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
        "Stock Level; missing Threshold key
        \"TT*\"."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_INVALID,
        "Stock Level; Threshold value must be in
        the range = 1 - 99."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_RANGE,
        "Stock Level Threshold out of
        range, range must be 1 - 99."
    },
    {
        ERR_VERSION_MISMATCH,
        "Invalid version field. RTE and Web Client
        are probably out of sync."
    },
    {
        ERR_W_ID_INVALID,
        "Invalid Warehouse ID."
    },
    {
        0,
        ""
    },
};
char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
        error number." );
        break;
    }
    if (m_Error ==
    errorMsgs[i].iError)
    {

```

```

        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}
if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    sprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

/* FUNCTION: GetKeyValue
 *
 * PURPOSE:      This function parses a http
formatted string for specific key values.
 *
 * ARGUMENTS:   char
                *pQueryString      http string from client
browser
                char
                *pKey              key
value to look for
                char
                *pValue           character array into which to place key's
value
                int
                iMax             maximum length of key value array.
                WEBERROR
                err              error value to throw
 *
 * RETURNS:     nothing.
 *
 * ERROR:       if (the pKey value is not found)
then
                if
(err == 0)
                return (empty string)
                else
                throw CWEBCLNT_ERR(err)
 *
 * COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
                TPC-C input
fields in such a manner that the keys can be
extracted in the
                above manner.
 */

```

```

void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;

    iMax--; // one position is for terminating
null
while( *ptr && *ptr != '&' && iMax)
{
    *pValue++ = *ptr++;
    iMax--;
}
*pValue = 0; // terminating null
*pQueryString = ptr;
return;

ErrorExit:
    if (err != NO_ERR)
        throw new CWEBCLNT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
 *
 * PURPOSE:      This function parses a http
formatted string for a specific key value.
 *
 * ARGUMENTS:   char
                *pQueryString      http string from client
browser
                char
                *pKey              key
value to look for
                WEBERROR
                NoKeyErr          error value to throw if
key not found
                WEBERROR
                NotIntErr         error value to throw if
value not numeric
 *
 * RETURNS:     integer
 *
 * ERROR:       if (the pKey value is not found)
then
                if
(NoKeyErr != NO_ERR)
                throw CWEBCLNT_ERR(err)
                else
                return 0
                else if (non-
numeric char found) then

```

```

 *
 * (NotIntErr != NO_ERR) then
 *
 *     throw CWEBCLNT_ERR(err)
 *
 *     else
 *
 *     return 0
 *
 * COMMENTS:    http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
                TPC-C input
fields in such a manner that the keys can be
extracted in the
                above manner.
 */

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;

    ptr0 = ptr; // remember
starting point
// scan string until a terminator (null or
&) or a non-digit
while( *ptr && *ptr != '&' && isdigit(*ptr)
)
    ptr++;

// make sure we stopped scanning for the
right reason
if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
{
    if (NotIntErr != NO_ERR)
        throw new CWEBCLNT_ERR(
NoKeyErr );
    return 0;
}

*pQueryString = ptr;
return atoi(ptr0);

ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWEBCLNT_ERR( NoKeyErr
);
    return 0;
}

/* FUNCTION: TermInit
 *
 * PURPOSE:      This function initializes the
client terminal structure; it is called when the
TPCC.DLL

```

```

*                               is first loaded by the
inet service.
*
*/
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries =
Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR(
ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData,
Term.iNumEntries * sizeof(CLIENTDATA) );

    Term.iFreeList =
Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets
set to -1, which marks it as "in use".
    // This is intentional, as the zero
entry is used as an anchor and never
    // allocated as an actual
terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree =
i-1;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
*
* PURPOSE: This function frees allocated
resources associated with the terminal structure.
*
* ARGUMENTS: none
*
* RETURNS: None
*
* COMMENTS: This function is called only when
the inet service unloads the TPCC.DLL
*
*/
void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)

```

```

{
    if (Term.pClientData[i].iNextFree
== -1)
        delete
Term.pClientData[i].pTxn;
}

    Term.iFreeList = 0;
    Term.iNumEntries = 0;
    if ( Term.pClientData )
        free(Term.pClientData);
    Term.pClientData = NULL;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermAdd
*
* PURPOSE: This function assigns a terminal
id which is used to identify a client browser.
*
* RETURNS: int
          assigned terminal id
*
*/
int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;

        Term.pClientData[iNewTerm].iNextFree = -1;
        // indicates this position is in use
    }
    else
    {
        // no open slots, so find the
slot that hasn't been used in the longest time and
reuse it
        for(iNewTerm=1, i=1,
iTickCount=0x7FFFFFFF; i<Reg.dwMaxConnections; i++)
        {
            if (iTickCount >
Term.pClientData[i].iTickCount)
            {
                iTickCount =
Term.pClientData[i].iTickCount;
                iNewTerm = i;
            }
        }
        // if oldest term is less than
one minute old, it probably means that more
connections

```

```

// are being attempted than were
specified as "Max Connections" at install. In this
case,
// do not bump existing
connection; instead, return error to requester.
    if ((GetTickCount() - iTickCount)
< 60000)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
    }

    Term.pClientData[iNewTerm].iTickCount =
GetTickCount();
    Term.pClientData[iNewTerm].iSyncId =
Term.iMasterSyncId++;
    Term.pClientData[iNewTerm].pTxn = NULL;

    LeaveCriticalSection(&TermCriticalSection);
    return iNewTerm;
}

/* FUNCTION: TermDelete
*
* PURPOSE: This function makes a terminal
entry in the Term array available for reuse.
*
* ARGUMENTS: int id
          Terminal id of client exiting
*
*/
void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;
        // put onto free list
        EnterCriticalSection(&TermCriticalSection);
        Term.pClientData[id].iNextFree =
Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
*
*/
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer )
{

```

```

        wprintf(szBuffer,
            "<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
            "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
            "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
            "<BOLD>An Error
Occurred</BOLD><BR><BR>"
            "%s"
            "<BR><BR><HR>"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
            "</FORM></BODY></HTML>"
            , iType, iErrorNum,
MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
*/

void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm)
{
    wprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
        "Select Desired
Transaction.<BR><HR>"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"

```

```

            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
            "</FORM></BODY></HTML>"
            , MAIN_MENU_FORM, iTermId,
iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*
* PURPOSE: This function constructs the
Stock Level HTML page.
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
* be freed
except when the client terminal id is no longer
needed.
*/

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm)
{
    int c;

    c = wprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Stock
Level</TITLE></HEAD><FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">
Stock-Level<BR>"
        "Warehouse: %6.6d District:
%2.2d<BR> <BR>,"
        STOCK_LEVEL_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id,
Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
            "Stock Level Threshold:
<INPUT NAME=\"TT\" SIZE=2><BR> <BR>"
            "low stock:
</font><BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>"

```

```

            "<BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR></PRE><HR>"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
            "</FORM></HTML>" );
        else
        {
            wprintf(szForm+c,
                "Stock Level Threshold:
%2.2d<BR> <BR>"
                "low stock:
%3.3d</font> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR></PRE><HR>"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
                "</FORM></HTML>"
                , pStockLevelData-
>threshold, pStockLevelData->low_stock);
        }
    }

/* FUNCTION: MakeNewOrderForm
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
* be freed
except when the client terminal id is no longer
needed.
*/

void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm)
{
    int i, c;
    BOOL bValid;
    static char szBR[] = " <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>";

    if (!bInput)
        assert( (pNewOrderData-
>exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem) );

    bValid = (bInput || (pNewOrderData-
>exec_status_code == eOK));

```

```

        c = sprintf(szForm,
            " <HTML><HEAD><TITLE>TPC-C New
Order</TITLE></HEAD><BODY>
            <FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">
            <INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">
            <INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">
            <INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">
            <INPUT TYPE=\"hidden\"
NAME=\"TERMIN\" VALUE=\"%d\">
            <INPUT TYPE=\"hidden\"
NAME=\"SYCID\" VALUE=\"%d\">
            <PRE><font face=\"Courier\">
New Order<BR>
            , bValid ? 0 : ERR_BAD_ITEM_ID,
NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

        if ( bInput )
        {
            c += sprintf(szForm+c,
"Warehouse: %6.6d ", Term.pClientData[iTermId].w_id
);

            strcpy( szForm+c,
                "District: <INPUT
NAME=\"DID*\" SIZE=1>
Date:<BR>
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
Credit: %8.2f <BR>
                "Order Number:
Number of Lines:      W_tax:      D_tax:<BR>
<BR>
                " Supp_W Item_Id Item
Name      Qty Stock B/G Price
Amount<BR>
                " <INPUT
NAME=\"SP00*\" SIZE=4> <INPUT NAME=\"IID00*\"
SIZE=6>
                <INPUT
NAME=\"Qty00*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP01*\" SIZE=4> <INPUT NAME=\"IID01*\"
SIZE=6>
                <INPUT
NAME=\"Qty01*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP02*\" SIZE=4> <INPUT NAME=\"IID02*\"
SIZE=6>
                <INPUT
NAME=\"Qty02*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP03*\" SIZE=4> <INPUT NAME=\"IID03*\"
SIZE=6>
                <INPUT
NAME=\"Qty03*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP04*\" SIZE=4> <INPUT NAME=\"IID04*\"
SIZE=6>
                <INPUT
NAME=\"Qty04*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP05*\" SIZE=4> <INPUT NAME=\"IID05*\"

```

```

SIZE=6>
NAME=\"Qty05*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP06*\" SIZE=4> <INPUT NAME=\"IID06*\"
SIZE=6>
                <INPUT
NAME=\"Qty06*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP07*\" SIZE=4> <INPUT NAME=\"IID07*\"
SIZE=6>
                <INPUT
NAME=\"Qty07*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP08*\" SIZE=4> <INPUT NAME=\"IID08*\"
SIZE=6>
                <INPUT
NAME=\"Qty08*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP09*\" SIZE=4> <INPUT NAME=\"IID09*\"
SIZE=6>
                <INPUT
NAME=\"Qty09*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP10*\" SIZE=4> <INPUT NAME=\"IID10*\"
SIZE=6>
                <INPUT
NAME=\"Qty10*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP11*\" SIZE=4> <INPUT NAME=\"IID11*\"
SIZE=6>
                <INPUT
NAME=\"Qty11*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP12*\" SIZE=4> <INPUT NAME=\"IID12*\"
SIZE=6>
                <INPUT
NAME=\"Qty12*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP13*\" SIZE=4> <INPUT NAME=\"IID13*\"
SIZE=6>
                <INPUT
NAME=\"Qty13*\" SIZE=1><BR>
                " <INPUT
NAME=\"SP14*\" SIZE=4> <INPUT NAME=\"IID14*\"
SIZE=6>
                <INPUT
NAME=\"Qty14*\" SIZE=1><BR>
            "Execution Status:
Total:<BR>
            "</font></PRE><HR>
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">
            "</FORM></HTML>
        );
        }
        else
        {
            c += sprintf(szForm+c,
"Warehouse: %6.6d District: %2.2d
Date: ",
                pNewOrderData->w_id,
                pNewOrderData->d_id);

            if ( bValid )
            {
                c += sprintf(szForm+c,
"%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
                pNewOrderData->o_entry_d.day,

```

```

                pNewOrderData->o_entry_d.month,
                pNewOrderData->o_entry_d.year,
                pNewOrderData->o_entry_d.hour,
                pNewOrderData->o_entry_d.minute,
                pNewOrderData->o_entry_d.second);
            }
            c += sprintf(szForm+c,
"<BR>Customer: %4.4d Name: %-16s Credit: %-2s
",
                pNewOrderData->c_id,
                pNewOrderData->c_last, pNewOrderData->c_credit);

            if ( bValid )
            {
                c += sprintf(szForm+c,
                "%Disc: %5.2f <BR>
                "Order Number: %8.8d Number of Lines:
                %2.2d W_tax: %5.2f D_tax: %5.2f <BR> <BR>
                " Supp_W Item_Id Item Name
                Qty Stock B/G Price Amount<BR>",
                100.0*pNewOrderData->c_discount,
                pNewOrderData->o_id,
                pNewOrderData->o_ol_cnt,
                100.0 *
                pNewOrderData->w_tax,
                100.0 *
                pNewOrderData->d_tax);

            for(i=0;
            i<pNewOrderData->o_ol_cnt; i++)
            {
                c +=
                sprintf(szForm+c, "%6.6d %6.6d %-24s %2.2d
                %3.3d %1.1s %6.2f %6.2f <BR>",
                pNewOrderData->OL[i].ol_supply_w_id,
                pNewOrderData->OL[i].ol_i_id,
                pNewOrderData->OL[i].ol_i_name,
                pNewOrderData->OL[i].ol_quantity,
                pNewOrderData->OL[i].ol_stock,
                pNewOrderData->OL[i].ol_brand_generic,
                pNewOrderData->OL[i].ol_i_price,
                pNewOrderData->OL[i].ol_amount );
            }

```

```

}
else
{
    c += sprintf(szForm+c,
        "%Disc:<BR>"
        "Order
Number: %8.8d Number of Lines:      W_tax:
D_tax:<BR><BR>"
        " Supp_W
Item_Id Item Name      Qty Stock B/G
Price Amount<BR>"
pNewOrderData->o_id);

        i = 0;
    }
    strncpy( szForm+c, szBR, (15-i)*5
);
    c += (15-i)*5;
    if ( bValid )
        c += sprintf(szForm+c,
"Execution Status: Transaction committed.
Total: $%8.2f ",
pNewOrderData->total_amount);
        else
            c += sprintf(szForm+c,
"Execution Status: Item number is not valid.
Total:");

        strcpy(szForm+c,
"
<BR></font></PRE><HR>"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</FORM></HTML>"
);
    }
}
/* FUNCTION: MakePaymentForm
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
*                  be freed
except when the client terminal id is no longer
needed.
*/

```

```

void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm)
{
    int c;

    c = sprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">"
Payment<BR>"
        "Date: "
, PAYMENT_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

        if ( !bInput )
        {
            c += sprintf(szForm+c, "%2.2d-
%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
pPaymentData-
>h_date.day,
pPaymentData-
>h_date.month,
pPaymentData-
>h_date.year,
pPaymentData-
>h_date.hour,
pPaymentData-
>h_date.minute,
pPaymentData-
>h_date.second);
        }
        if ( bInput )
        {
            c += sprintf(szForm+c,
                "<BR><BR>Warehouse:
%6.6d"
                "
District: <INPUT NAME=\"DID\" SIZE=1><BR><BR><BR>
<BR><BR>"
                "Customer: <INPUT
NAME=\"CID\" SIZE=4>"
                "Cust-Warehouse: <INPUT
NAME=\"CWI\" SIZE=4> "
                "Cust-District: <INPUT
NAME=\"CDI\" SIZE=1><BR>"
                "Name:
<INPUT NAME=\"CLT\" SIZE=16>
Since:<BR>"
                "
Credit:<BR>"
            );
        }
    }
}

```

```

"
Disc:<BR>"
"
Phone:<BR><BR>"
"Amount Paid:
$<INPUT NAME=\"HAM\" SIZE=7>     New Cust-
Balance:<BR>"
"Credit Limit:<BR>
<BR>Cust-Data: <BR><BR><BR><BR>
<BR></font></PRE><HR>"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\"><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
"</BODY></FORM></HTML>"
Term.pClientData[iTermId].w_id);
}
else
{
    c += sprintf(szForm+c,
        "<BR><BR>Warehouse:
%6.6d
District: %2.2d<BR>"
        "%-20s
%-20s
%-20s
%-20s %s-%4.4s<BR><BR>"
        "Customer: %4.4d Cust-
Warehouse: %6.6d Cust-District: %2.2d<BR>"
        "Name: %-16s %-2s %-
16s Since: %2.2d-%2.2d-%4.4d<BR>"
        "
%-20s
Credit: %s<BR>"
        ,
Term.pClientData[iTermId].w_id, pPaymentData->d_id
, pPaymentData-
>w_street_1, pPaymentData->d_street_1
, pPaymentData-
>w_street_2, pPaymentData->d_street_2
, pPaymentData->w_city,
pPaymentData->w_state, pPaymentData->w_zip,
pPaymentData->w_zip+5
, pPaymentData->d_city,
pPaymentData->d_state, pPaymentData->d_zip,
pPaymentData->d_zip+5
, pPaymentData->c_id,
pPaymentData->c_id
, pPaymentData-
>c_first, pPaymentData->c_middle, pPaymentData-
>c_last
, pPaymentData-
>c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
, pPaymentData-
>c_street_1, pPaymentData->c_credit
);
    c += sprintf(szForm+c,
        "
%-20s
%%Disc: %5.2f<BR>",
        "%-20s

```

```

        pPaymentData-
>c_street_2, 100.0*pPaymentData->c_discount);
        c += sprintf(szForm+c,
                    "    %-20s %-2s\n",
                    "Phone: %6.6s-%3.3s-%3.3s-%4.4s<BR><BR>",
                    pPaymentData->c_city,
                    pPaymentData->c_state, pPaymentData->c_zip,
                    pPaymentData->c_zip+5,
                    pPaymentData->c_phone,
                    pPaymentData->c_phone+6, pPaymentData->c_phone+9,
                    pPaymentData->c_phone+12 );
        c += sprintf(szForm+c,
                    "Amount Paid:    \n",
                    "$%7.2f    New Cust-Balance:  $%14.2f<BR>"
                    "Credit Limit:    \n",
                    "$%13.2f<BR> <BR>"
                    "    , pPaymentData-
>h_amount, pPaymentData->c_balance
                    , pPaymentData-
>c_credit_lim
                    );
        if ( pPaymentData->c_credit[0] ==
'B' && pPaymentData->c_credit[1] == 'C' )
            c += sprintf(szForm+c,
                "Cust-Data: %5.50s<BR>    %-\n",
                "50.50s<BR>    %50.50s<BR>    %-\n",
                "50.50s<BR>    ",
                pPaymentData->c_data, pPaymentData-
>c_data+50, pPaymentData->c_data+100, pPaymentData-
>c_data+150 );
            else
                strcpy(szForm+c, "Cust-
Data: <BR> <BR> <BR> <BR>");
                strcat(szForm,
" <BR></font></PRE><HR>"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..NewOrder..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Payment..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Delivery..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Order-Status..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Stock-Level..\">"
                " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Exit..\">"
                " </BODY></FORM></HTML>");
            }

```

```

}
/* FUNCTION: MakeOrderStatusForm
 *
 * COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
 * be freed
 * except when the client terminal id is no longer
needed.
 */
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm)
{
    int i, c;
    static char szBR[] = " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>";
    c = sprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C Order-
Status</TITLE></HEAD><BODY>"
                "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"TERMIN\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"SYCID\" VALUE=\"%d\">"
                "<PRE><font face=\"Courier\">
Order-Status<BR>"
                "Warehouse: %6.6d ",
                ORDER_STATUS_FORM, iTermId,
                Term.pClientData[iTermId].iSyncId,
                Term.pClientData[iTermId].w_id);
    if ( bInput )
        {
            strcpy(szForm+c,
                "District: <INPUT
NAME=\"DID*\" SIZE=1><BR>"
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
<INPUT NAME=\"CLT*\" SIZE=23><BR>"
                "<BR>"
                "Order-Number:
Carrier-
Number:<BR>"
                "Supply-W Item-Id
Qty Amount Delivery-Date<BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR></font></PRE>"
            );
        }

```

```

" <HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\"><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
" </BODY></FORM></HTML>"
);
    }
    else
    {
        c += sprintf(szForm+c,
                    "District: %2.2d<BR>"
                    "Customer: %4.4d
Name: %16s %-2s %-16s<BR>",
                    pOrderStatusData->d_id,
                    pOrderStatusData->c_id,
                    pOrderStatusData-
>c_first, pOrderStatusData->c_middle,
                    pOrderStatusData->c_last);
        c += sprintf(szForm+c, "Cust-
Balance: $%9.2f<BR> <BR>",
                    pOrderStatusData-
>c_balance);
        c += sprintf(szForm+c,
                    "Order-Number: %8.8d
Entry-Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d
Carrier-Number: %2.2d<BR>"
                    "Supply-W Item-Id
Qty Amount Delivery-Date<BR>",
                    pOrderStatusData->o_id,
                    pOrderStatusData-
>o_entry_d.day,
                    pOrderStatusData-
>o_entry_d.month,
                    pOrderStatusData-
>o_entry_d.year,
                    pOrderStatusData-
>o_entry_d.hour,
                    pOrderStatusData-
>o_entry_d.minute,
                    pOrderStatusData-
>o_entry_d.second,
                    pOrderStatusData-
>o_carrier_id);
        for(i=0; i< pOrderStatusData-
>o_ol_cnt; i++)
            {
                c += sprintf(szForm+c,
                    " %6.6d %6.6d %2.2d %8.2f %2.2d-
%2.2d-%4.4d<BR>",
                    pOrderStatusData->OL[i].ol_supply_w_id,
                    pOrderStatusData->OL[i].ol_i_id,
                    pOrderStatusData->OL[i].ol_quantity,
                    pOrderStatusData->OL[i].ol_amount,
                    pOrderStatusData->OL[i].ol_delivery_d.day,

```



```

        pOrderStatusData-
>OL[i].ol_delivery_d.month,
        pOrderStatusData-
>OL[i].ol_delivery_d.year);
    }
    strncpy( szForm+c, szBR, (15-i)*5
);
    c += (15-i)*5;
    strcpy(szForm+c,
        "</font></PRE><HR><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">\"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">\"
        "</BODY></FORM></HTML>\"
);
    }
}
/* FUNCTION: MakeDeliveryForm
*
* COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
*                be freed
except when the client terminal id is no longer
needed.
*/
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm)
{
    int    c;
    c = sprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C
Delivery</TITLE></HEAD><BODY>\"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">\"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">\"
        "<PRE><font face=\"Courier\">
Delivery<BR>\"

```

```

        "Warehouse: %6.6d<BR> <BR>\",
        (bInput && (pDeliveryData-
>exec_status_code != eOK)) ? ERR_TYPE_DELIVERY_POST :
0,
        DELIVERY_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);
    if ( bInput )
    {
        strcpy( szForm+c,
            "Carrier Number: <INPUT
NAME=\"OCD*\" SIZE=1><BR> <BR>\"
            "Execution Status: <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR>\"
            " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE><HR>\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">\"
            "</BODY></FORM></HTML>\"
        );
    }
    else
    {
        sprintf( szForm+c,
            "Carrier Number:
%2.2d<BR> <BR>\"
            "Execution Status: %s
<BR> <BR> <BR> <BR> <BR> <BR> <BR>\"
            " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE>\"
            "<CHR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">\"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">\"
            "</BODY></FORM></HTML>\"
        ), pDeliveryData-
>o_carrier_id,
        (pDeliveryData-
>exec_status_code == eOK) ? "Delivery has been
queued." : "Delivery Post Failed
";
    }
}
/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE:      This function gets and validates
the input data from the new order form
*                filling in the required
input variables. it then calls the SQLNewOrder

```

```

*                transaction, constructs
the output form and writes it back to client
*                browser.
*/
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA    pNewOrder;
    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    ZeroMemory(pNewOrder,
sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id =
Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString,
pNewOrder);
    Term.pClientData[iTermId].pTxn->NewOrder();
    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder,
OUTPUT_FORM, szBuffer );
}
/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE:      This function gets and validates
the input data from the payment form
*                filling in the required
input variables. It then calls the SQLPayment
transaction, constructs
the output form and writes it back to client
*                browser.
*
* ARGUMENTS:    EXTENSION_CONTROL_BLOCK
                *pECB    passed in structure pointer from
inetsrv.
                int
                iTermId    client browser terminal id
*/
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA    pPayment;
    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id =
Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString,
pPayment);
    Term.pClientData[iTermId].pTxn->Payment();

```

```

        pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
        MakePaymentForm(iTermId, pPayment,
OUTPUT_FORM, szBuffer);
    }

/* FUNCTION: ProcessOrderStatusForm
 *
 * PURPOSE:      This function gets and validates
the input data from the Order Status
 *              form filling in the
required input variables. It then calls the
 *              SQLOrderStatus
transaction, constructs the output form and writes it
 *              back to client browser.
 *
 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.
 *              int
 *              iTermId  client browser terminal id
 */

void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA  pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus,
sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id =
Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString,
pOrderStatus);

    Term.pClientData[iTermId].pTxn-
>OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
 *
 * PURPOSE:      This function gets and validates
the input data from the delivery form
 *              filling in the required
input variables. It then calls the PostDeliveryInfo
 *              Api, The client is then
informed that the transaction has been posted.
 *
 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.

```

```

 *              int
 *              iTermId  client browser terminal id
 */

void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char          *ptr = pECB->lpszQueryString;
    PDELIVERY_DATA  pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    ZeroMemory(pDelivery,
sizeof(DELIVERY_DATA));
    pDelivery->w_id =
Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id =
GetIntKeyValue(&ptr, "OCD*",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALID);
    if ( pDelivery->o_carrier_id > 10 ||
pDelivery->o_carrier_id < 1 )
        throw new CWBCLNT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery-
>w_id, pDelivery->o_carrier_id ) )
            pDelivery-
>exec_status_code = eDeliveryFailed;
        else
            pDelivery-
>exec_status_code = eOK;
    }
    else // delivery is done synchronously if
no delivery threads configured
        Term.pClientData[iTermId].pTxn-
>Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
 *
 * PURPOSE:      This function gets and validates
the input data from the Stock Level
 *              form filling in the
required input variables. It then calls the
 *              SQLStockLevel
transaction, constructs the output form and writes it
 *              back to client browser.
 *

```

```

 * ARGUMENTS:    EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.
 *              int
 *              iTermId  client browser terminal id
 */

void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char          *ptr = pECB-
>lpszQueryString;
    PSTOCK_LEVEL_DATA  pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel,
sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id =
Term.pClientData[iTermId].w_id;
    pStockLevel->d_id =
Term.pClientData[iTermId].d_id;

    pStockLevel->threshold =
GetIntKeyValue(&ptr, "TT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ( pStockLevel->threshold >= 100 ||
pStockLevel->threshold < 0 )
        throw new CWBCLNT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn-
>StockLevel();

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
 *
 * PURPOSE:      This function extracts and
validates the new order form data from an http
command string.
 *
 * ARGUMENTS:    LPSTR
 *lpszQueryString  client
browser http command string
 *
 *              NEW_ORDER_DATA  *pNewOrderData
 *              pointer to new order data structure
 *
 */

```

```

void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData)
{
    char        szTmp[26];
    int         i;
    short      items;
    int         ol_i_id, ol_quantity;
    char        *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6]
=
    { "SP00*", "SP01*", "SP02*",
"SP03*", "SP04*",
"SP05*", "SP06*", "SP07*",
"SP08*", "SP09*",
"SP10*", "SP11*", "SP12*",
"SP13*", "SP14*" };
    static char
szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "IID00*", "IID01*", "IID02*",
"IID03*", "IID04*",
"IID05*", "IID06*", "IID07*",
"IID08*", "IID09*",
"IID10*", "IID11*", "IID12*",
"IID13*", "IID14*" };
    static char
szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
    { "Qty00*", "Qty01*", "Qty02*",
"Qty03*", "Qty04*",
"Qty05*", "Qty06*", "Qty07*",
"Qty08*", "Qty09*",
"Qty10*", "Qty11*", "Qty12*",
"Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr,
"CID*", ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS;
i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp)
throw new
CWEBCLNT_ERR( ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData-
>OL[items].ol_supply_w_id = atoi(szTmp);

            ol_i_id =
pNewOrderData->OL[items].ol_i_id =
                GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999
|| ol_i_id < 1 )

```

```

throw new
CWEBCLNT_ERR( ERR_NEWORDER_ITEMID_RANGE );
            ol_quantity =
pNewOrderData->OL[items].ol_quantity =
                GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_QTY_INVALID);
            if ( ol_quantity > 99
|| ol_quantity < 1 )
throw new
CWEBCLNT_ERR( ERR_NEWORDER_QTY_RANGE );
            items++;
        }
        else
        {
            // nothing entered for
supply warehouse, so item id and qty must also be
blank
            GetKeyValue(&ptr,
szIID[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_IID_KEY);
            if ( szTmp[0] )
throw new
CWEBCLNT_ERR( ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );
            GetKeyValue(&ptr,
szQty[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_QTY_KEY);
            if ( szTmp[0] )
throw new
CWEBCLNT_ERR( ERR_NEWORDER_QTY_WITHOUT_SUPPW );
        }
        if ( items == 0 )
throw new CWEBCLNT_ERR(
ERR_NEWORDER_NOITEMS_ENTERED );

        pNewOrderData->o_ol_cnt = items;
    }

/* FUNCTION: GetPaymentData
*
* PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
*
* ARGUMENTS:   LPSTR          client
                lpszQueryString browser http command string
                *pPaymentData  PAYMENT_DATA
                pointer to
                payment data structure
*/

void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData)
{
    char        szTmp[26];
    char        *ptr = lpszQueryString;
    BOOL        bCustIdBlank;
    int         iLen;

```

```

        pPaymentData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

        GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
        if ( szTmp[0] == 0 )
        {
            bCustIdBlank = TRUE;
            pPaymentData->c_id = 0;
        }
        else
        {
            // parse customer id and verify
that last name was NOT entered
            bCustIdBlank = FALSE;
            if ( !IsNumeric(szTmp) )
throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
            pPaymentData->c_id = atoi(szTmp);
        }

        pPaymentData->c_w_id = GetIntKeyValue(&ptr,
"CWI*", ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
        pPaymentData->c_d_id = GetIntKeyValue(&ptr,
"CDI*", ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_CDI_INVALID);

        if ( bCustIdBlank )
        {
            // customer id is blank, so last
name must be entered
            GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
            if ( szTmp[0] == 0 )
throw new CWEBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );

            _strupr( szTmp );
            if ( strlen(szTmp) >
LAST_NAME_LEN )
throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );

            strcpy(pPaymentData->c_last,
szTmp);
            // pad with spaces so that the
client layer doesn't have to do it
            // before passing parameters to
stored procedure
            iLen = strlen(pPaymentData-
>c_last);
            memset(pPaymentData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
            pPaymentData-
>c_last[LAST_NAME_LEN] = 0;
        }
        else
        {
            // parse customer id and verify
that last name was NOT entered
            GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
            if ( szTmp[0] != 0 )

```

```

                                throw new CWBCLNT_ERR(
ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
    if (!IsDecimal(szTmp))
        throw new CWBCLNT_ERR(
ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
        throw new CWBCLNT_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
 *
 * PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
 *
 */
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;
    int     iLen;

    pOrderStatusData->d_id =
GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last
name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(szTmp) >
LAST_NAME_LEN )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CLT_RANGE );

        strcpy(pOrderStatusData->c_last,
szTmp);
        // pad with spaces so that the
client layer doesn't have to do it
        // before passing parameters to
stored procedure
        iLen = strlen(pOrderStatusData-
>c_last);
        memset(pOrderStatusData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);

```

```

                                pOrderStatusData-
>c_last[LAST_NAME_LEN] = 0;
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id =
atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
 *
 * PURPOSE:      This function determines if a
string is numeric. It fails if any characters other
than numeric and null
terminator are present.
 *
 * ARGUMENTS:    char
                 *ptr
                 pointer to string to check.
 *
 * RETURNS:      BOOL    FALSE    if
string is not all numeric
 *
                TRUE    if string contains only numeric
characters i.e. '0' - '9'
 */
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
 *
 * PURPOSE:      This function determines if a
string is a non-negative decimal value.
 *
 * It fails if any characters other than a
series of numbers followed by
 *
                a decimal point,
another series of numbers, and a null terminator are
present.
 *
 * ARGUMENTS:    char
                 *ptr
                 pointer to string to check.
 *
 * RETURNS:      BOOL    FALSE    if
string is not a valid non-negative decimal value

```

```

 *
 * TRUE    if string is OK
 */
BOOL IsDecimal(char *ptr)
{
    char *dotp;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotp = strchr( ptr, '.' );
    if (dotp == NULL)
        // no decimal point, so just
check for numeric
        return IsNumeric(ptr);
    *dotp = 0; // temporarily replace
decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if (*(dotp+1) == 0)
        return FALSE; // nothing but a
decimal point is bad
    else
        bValid = TRUE;

    if (*(dotp+1) != 0)
        // check text after decimal point
        bValid &= IsNumeric(dotp+1);

    *dotp = '.'; // replace decimal point
    return bValid;
}

```

## ***tpcc.def***

LIBRARY TPCC.DLL

EXPORTS

```

    GetExtensionVersion @1
    HttpExtensionProc @2
    TerminateExtension @3

```

## ***tpcc.h***

```

/* FILE: TPCC.H
 *
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99

```

```

*
* PURPOSE: Header file for ISAPI TPCC.DLL,
defines structures and functions used in the isapi
tpcc.dll.
*/

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE
        101
#define _APS_NEXT_COMMAND_VALUE
        40001
#define _APS_NEXT_CONTROL_VALUE
        1000
#define _APS_NEXT_SYMED_VALUE
        101

#define TP_MAX_RETRIES
        50

//note that the welcome form must be processed first
as terminal ids assigned here, once the
//terminal id is assigned then the forms can be
processed in any order.
#define WELCOME_FORM
        1
        //beginning form no term id assigned, form
id
#define MAIN_MENU_FORM
        2
        //term id assigned main menu form id
#define NEW_ORDER_FORM
        3
        //new order form id
#define PAYMENT_FORM
        4
        //payment form id
#define DELIVERY_FORM
        5
        //delivery form id
#define ORDER_STATUS_FORM
        6
        //order
status id
#define STOCK_LEVEL_FORM
        7
        //stock level
form id

//This macro is used to prevent the compiler error
unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _CLIENTDATA
{
        int
                iNextFree;
                //index of
next free element or -1 if this entry in use.
        int
                w_id;
                //warehouse
id assigned at welcome form

```

```

        int
                d_id;
                //district id
assigned at welcome form

        int
                iSyncId;
                //synchronization id
        int
                iTickCount;
                //time of
last access;

        CTPCC_BASE
                *pTxn;

} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational
interface for terminal id support
typedef struct _TERM
{
        int
                iNumEntries;

        //total allocated terminal array entries
        int
                iFreeList;

        //next available terminal array element or
-1 if none
        int
                iMasterSyncId;
                //synchronization id
        CLIENTDATA
                *pClientData;
                //pointer to
allocated client data
} TERM;

typedef TERM *PTERM;
                //pointer to
terminal structure type

enum WEBERROR
{
        NO_ERR,
        ERR_COMMAND_UNDEFINED,
        ERR_D_ID_INVALID,
        ERR_DELIVERY_CARRIER_ID_RANGE,
        ERR_DELIVERY_CARRIER_INVALID,
        ERR_DELIVERY_MISSING_OCD_KEY,
        ERR_DELIVERY_THREAD_FAILED,
        ERR_GETPROCADDR_FAILED,
        ERR_HTML_ILL_FORMED,
        ERR_INVALID_SYNC_CONNECTION,
        ERR_INVALID_TERMID,
        ERR_LOADDLL_FAILED,
        ERR_MAX_CONNECTIONS_EXCEEDED,
        ERR_MEM_ALLOC_FAILED,
        ERR_MISSING_REGISTRY_ENTRIES,
        ERR_NEWORDER_CUSTOMER_INVALID,
        ERR_NEWORDER_CUSTOMER_KEY,
        ERR_NEWORDER_DISTRICT_INVALID,
        ERR_NEWORDER_FORM_MISSING_DID,
        ERR_NEWORDER_ITEMID_INVALID,
        ERR_NEWORDER_ITEMID_RANGE,

```

```

ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CDI_INVALID,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,

ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNT_ERR : public CBaseErr
{
public:
        CWEBCLNT_ERR(WEBERROR Err)
        {
                m_Error = Err;
                m_szTextDetail = NULL;
                m_SystemErr = 0;
                m_szErrorText = NULL;
        };

        CWEBCLNT_ERR(WEBERROR Err, char
        *szTextDetail, DWORD dwSystemErr)
        {
                m_Error = Err;
                m_szTextDetail = new
                char[strlen(szTextDetail)+1];
                strcpy( m_szTextDetail,
                szTextDetail );

```

```

        m_SystemErr =
dwSystemErr;
        m_szErrorText = NULL;
    };
    ~CWEBCLNT_ERR()
    {
        if (m_szTextDetail !=
NULL)
            delete []
m_szTextDetail;
        if (m_szErrorText !=
NULL)
            delete []
m_szErrorText;
    };
    WEBERROR m_Error;
    char
    *m_szTextDetail; //
    char
    *m_szErrorText;
    DWORD
        m_SystemErr;

    int ErrorType() {return
ERR_TYPE_WEBDLL;};
    char *ErrorTypeStr() { return
"WEBCLIENT"; }
    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

//These constants have already been defined in
engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6
//used to record a warning into the log

//function prototypes

BOOL WINAPI DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPCTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int
iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err);

```

```

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(long w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);
// Separate function to be able to use Win32
exception handling in
// HttpExtensionProc.
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId);

```

---

## tpcc.rc

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

////////////////////////////////////
////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS

////////////////////////////////////
////////////////////////////////////
// English (U.S.) resources

#ifdef _WIN32
#define _AFX_RESOURCE_DLL
#ifdef _AFX_TARG_ENU
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef _MAC
////////////////////////////////////
////////////////////////////////////
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGS 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C HTML DLL
Server\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "TPC-C HTML DLL
Server\0"
            VALUE "FileVersion", "0, 4, 0, 0\0"
            VALUE "InternalName", "tpcc\0"
            VALUE "LegalCopyright", "Copyright ©
1997\0"
            VALUE "OriginalFilename", "tpcc.dll\0"
            VALUE "ProductName", "Microsoft tpcc\0"
            VALUE "ProductVersion", "0, 4, 0, 0\0"
        END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END
#endif // !_MAC

```

```

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
//
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END
2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"afxres.h\"\r\n"
    "\0"
END
3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END
#endif // APSTUDIO_INVOKED

////////////////////////////////////
//
// Dialog
//
IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON   "OK", IDOK, 129, 7, 50, 14
    PUSHBUTTON     "Cancel", IDCANCEL, 129, 24, 50, 14
END

////////////////////////////////////
//
// DESIGNINFO
//
#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
END
#endif // APSTUDIO_INVOKED

```

```

#ifdef // English (U.S.) resources
////////////////////////////////////
//

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////
//
#endif // not APSTUDIO_INVOKED


```

## tpcc\_com.cpp

```

/* FILE: TPC_C_COM.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * not yet
 * audited
 *
 * PURPOSE: Source file for TPC-C COM+ class
 * implementation.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - first version
 */

// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\tpcc_com_errorcode.h"
#include "tpcc_com.h"

#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\tpcc_com_all\src\tpcc_com_all_i.c"

// wrapper routine for class constructor
_declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL
bSinglePool)

```

```

{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray =
SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray-
>pvData, 0, ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL,
COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC,
NULL, CLSCTX_SERVER, IID_ITPCC, (void
**)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same
        component
            m_pPayment = m_pNewOrder;
            m_pStockLevel = m_pNewOrder;
            m_pOrderStatus = m_pNewOrder;
        }
        else
        {
            // use different components for
            each txn

            hr =
CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
            if (FAILED(hr))
                throw new CCOMERR(hr);

```

```

        hr =
CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_StockLevel, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pStockLevel);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pOrderStatus);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    // call setcomplete to release each
component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pStockLevel->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus->
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

CTPCC_COM::~CTPCC_COM()
{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

void CTPCC_COM::NewOrder()
{
    VARIANT                vTxn_out;

```

```

        HRESULT hr = m_pNewOrder->NewOrder(m_vTxn,
&vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

void CTPCC_COM::Payment()
{
    VARIANT                vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn,
&vTxn_out);

    if (FAILED(hr) && hr != E_TPCCCOM)
        throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

void CTPCC_COM::StockLevel()
{
    VARIANT                vTxn_out;

    HRESULT hr = m_pStockLevel-
>StockLevel(m_vTxn, &vTxn_out);

    if (FAILED(hr) && hr != E_TPCCCOM)
        throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )

```

```

            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }

void CTPCC_COM::OrderStatus()
{
    VARIANT                vTxn_out;

    HRESULT hr = m_pOrderStatus-
>OrderStatus(m_vTxn, &vTxn_out);

    if (FAILED(hr) && hr != E_TPCCCOM)
        throw new CCOMERR( hr ); //
COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
        hr = SafeArrayDestroy(vTxn_out.parray);
        if (hr != S_OK)
            throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
    }
}

tpcc_com.h
/*      FILE:      TPCC_COM.H
*      Microsoft
TPC-C Kit Ver. 4.20.000
*      Copyright
Microsoft, 1999
*      All Rights Reserved
*
*      not yet
audited
*
*      PURPOSE:  Header file for TPC-C COM+ class
implementation.
*
*      Change history:
*      4.20.000 - first version
*/

#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CCOMERR : public CBaseErr
{
private:
    char m_szErrorText[64];

```



```

public:
    // use this interface for genuine
    COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to
    impersonate a non-COM error type
    CCOMERR( int iErrorType, int
    iError )
    {
        m_iErrorType =
        iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int m_hr;
    int m_iErrorType;
    int m_iError;

    // A CCOMERR class can
    impersonate another class, which happens if the error
    // was not actually a COM
    Services error, but was simply transmitted back via
    COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return
            ERR_TYPE_COM;
        else
            return
            m_iErrorType;
    }

    char *ErrorTypeStr() { return
    "COM*"; }

    int ErrorNum()
    {
        if (m_iErrorType == 0)
            return m_hr;
        // return COM error
        else
            return
            m_iError; // return impersonated error
    }

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf(
            m_szErrorText, "Error: Class %d, error # %d",
            m_iErrorType, m_iError );
        else
            sprintf(
            m_szErrorText, "Error: COM HRESULT %x", m_hr );
    }

```

```

return m_szErrorText;
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC*
    m_pNewOrder;
    ITPCC*
    m_pPayment;
    ITPCC*
    m_pStockLevel;
    ITPCC*
    m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA NewOrder;
            PAYMENT_DATA Payment;
            DELIVERY_DATA Delivery;
            STOCK_LEVEL_DATA StockLevel;
            ORDER_STATUS_DATA OrderStatus;
        } *m_pTxn;
        VARIANT m_vTxn;
    };

public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
    &m_pTxn->u.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
    &m_pTxn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
    &m_pTxn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
    &m_pTxn->u.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
    &m_pTxn->u.OrderStatus; };

    void NewOrder ();
    void Payment ();
    void StockLevel ();
    void OrderStatus ();
}

```

```

void Delivery ();
{ throw new CCOMERR(E_NOTIMPL); } // not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dlllexport) CTPCC_COM*
CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

tpcc_com_all.
cpp
/* FILE: TPCCC_COM_ALL.CPP
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Implementation for TPC-C class.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - updated rev number to
match kit
*/

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADED

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it
if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>

```

```

// #include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlxt.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"
// tpckit transaction
header contains definations of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\common\src\tpcc_com_errorcode.h"
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
OBJECT_ENTRY(CLSID_TPCC, CTPCC)
OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
OBJECT_ENTRY(CLSID_OrderStatus,
COrderStatus)
OBJECT_ENTRY(CLSID_Payment, CPayment)
OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char
    szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_ODBC          *pCTPCC_ODBC_new;

// Critical section to synchronize connection open
and close.
//
CRITICAL_SECTION hConnectCriticalSection;

////////////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD
dwReason, LPVOID /*lpReserved*/)
{
    char szDllName[128];

```

```

        try
        {
            if (dwReason ==
DLL_PROCESS_ATTACH)
            {
                _Module.Init(ObjectMap,
hInstance);

                DisableThreadLibraryCalls(hInstance);

                DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;

                GetComputerName(szMyComputerName, &dwSize);

                szMyComputerName[dwSize] = 0;

                if (
ReadTPCCRegistrySettings( &Reg ) )
                    throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );

                if (Reg.eDB_Protocol ==
ODBC)
                {
                    strcpy(
szDllName, Reg.szPath );

                    strcat(
szDllName, "tpcc_odbc.dll");

                    hLibInstanceDb = LoadLibrary( szDllName );
                    if
(hLibInstanceDb == NULL)
                        throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                    // get
function pointer to wrapper for class constructor

                    pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
                    if
(pCTPCC_ODBC_new == NULL)
                        throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                    else
                        throw new
CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL );

                    if (Reg.dwConnectDelay
> 0)
                    {
                        InitializeCriticalSection(&hConnectCritical
Section);
                    }
                }
            }
            else if (dwReason ==
DLL_PROCESS_DETACH)

```

```

                _Module.Term();
            }
        }
        catch (CBaseErr *e)
        {
            TCHAR szMsg[256];

            _sntprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e-
>ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
            WriteMessageToEventLog( szMsg );

            delete e;
            return FALSE;
        }
        catch (...)
        {
            WriteMessageToEventLog(TEXT("Unhandled
exception in object DllMain"));
            return FALSE;
        }
        return TRUE; // OK
    }

////////////////////////////////////
////////////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE

STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
S_FALSE;
}

////////////////////////////////////
////////////////////////////////////
// Returns a class factory to create an object of the
requested type

STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}

////////////////////////////////////
////////////////////////////////////
// DllRegisterServer - Adds entries to the system
registry

STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

```

```

////////////////////////////////////
////////////////////////////////////
// DllUnregisterServer - Removes entries from the
system registry

STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("tpcc_com_all.dll"));

    _sprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
        EVENTLOG_ERROR_TYPE, // event type
        0, // event category
        0, // event ID
        NULL, // current user's
SID
        2, // strings in
lpszStrings
        0, // no bytes of raw
data
        (LPCTSTR *)lpszStrings, // array of
error strings
        NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*/
char* CCOMPONENT_ERR::ErrorText(void)

```

```

{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
"Required entries missing from registry."
},
        { ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
},
        { ERR_GETPROCADDR_FAILED,
"Could not map proc in DLL. GetProcAddress
error. DLL="
},
        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in
registry."
},
        { 0, ""
}
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number." );
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {
        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~~CTPCC_Common()
{

```

```

// Pace connection close for VIA.
//
if (Reg.dwConnectDelay > 0)
{
    EnterCriticalSection(&hConnectCriticalSecti
on);

    Sleep(Reg.dwConnectDelay);

    LeaveCriticalSection(&hConnectCriticalSecti
on);
}

if (m_pTxn)
{
    delete m_pTxn;
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;

    // get our object context
    HRESULT hr = CoGetObjectContext(
IID_IObjectContext, (void **)&pObjectContext );
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

//
// called by the ctor activator
//
STDMETHODIMP CTPCC_Common::Construct(IDispatch *
pUnk)
{
    // Code to access construction string, if
needed later...
    //
    if (!pUnk)
        return E_UNEXPECTED;
    //
    IObjectConstructString * pString
= NULL;
    //
    HRESULT hr = pUnk-
>QueryInterface(IID_IObjectConstructString, (void
**)&pString);
    //
    pString->Release();

    try
    {
        // Pace connection creation for
VIA.
        //
        if (Reg.dwConnectDelay > 0)
        {
            EnterCriticalSection(&hConnectCriticalSecti
on);

            Sleep(Reg.dwConnectDelay);

```

```

    LeaveCriticalSection(&hConnectCriticalSection);
    }
    if (Reg.eDB_Protocol == ODBC)
        m_pTxn =
pCTPCC_ODBC_new(
    Reg.szDbServer, Reg.szDbUser,
    Reg.szDbPassword,

    szMyComputerName, Reg.szDbName,

    Reg.szSPPrefix,
    Reg.bCallNoDuplicatesNewOrder );
    }
    catch (CBaseErr *e)
    {
        TCHAR szMsg[256];
        _sntprintf(szMsg, sizeof(szMsg),
"%s error in CTPCC_Common::Construct, code %d: %s",
    e-
>ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
        WriteMessageToEventLog( szMsg );
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in object ::Construct"));
        return E_FAIL;
    }
    return S_OK;
}
HRESULT CTPCC_Common::NewOrder(VARIANT txn_in,
VARIANT* txn_out)
{
    PNEW_ORDER_DATA    pNewOrder;
    COM_DATA            *pData;
    COM_DATA            *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
    }

```

```

        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pNewOrder = m_pTxn-
>BuffAddr_NewOrder();

        memcpy(pNewOrder, &pData-
>u.NewOrder, sizeof(NEW_ORDER_DATA));

        do the actual txn
        m_pTxn->NewOrder(); //

        memcpy( &pOutData->u.NewOrder,
pNewOrder, sizeof(NEW_ORDER_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054) ) )
            m_bCanBePooled = FALSE;

        pOutData->retval = e-
>ErrorType();

        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::NewOrder."));
        pOutData->retval =
ERR_TYPE_LOGIC;

        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}
HRESULT CTPCC_Common::Payment(VARIANT txn_in,
VARIANT* txn_out)
{
    PPAYMENT_DATA    pPayment;
    COM_DATA          *pData;
    COM_DATA          *pOutData;

    try

```

```

    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,

        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pPayment = m_pTxn-
>BuffAddr_Payment();

        memcpy(pPayment, &pData-
>u.Payment, sizeof(PAYMENT_DATA));

        do the actual txn
        m_pTxn->Payment(); //

        memcpy( &pOutData->u.Payment,
pPayment, sizeof(PAYMENT_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054) ) )
            m_bCanBePooled = FALSE;

        pOutData->retval = e-
>ErrorType();

        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::Payment."));
        pOutData->retval =
ERR_TYPE_LOGIC;

```

```

        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in,
VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA pStockLevel;
    COM_DATA *pData;
    COM_DATA *pOutData;

    try
    {
        // Allocate output structure
        // first because it is also used in the catch clauses.
        // VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pStockLevel = m_pTxn-
>BuffAddr_StockLevel();

        memcpy(pStockLevel, &pData-
>u.StockLevel, sizeof(STOCK_LEVEL_DATA));

        m_pTxn->StockLevel();

        memcpy( &pOutData->u.StockLevel,
pStockLevel, sizeof(STOCK_LEVEL_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
    }
}

```

```

        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCCOM;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::StockLevel."););
        pOutData->retval =
ERR_TYPE_LOGIC;
        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txn_in,
VARIANT* txn_out)
{
    PORDER_STATUS_DATA pOrderStatus;
    COM_DATA *pData;
    COM_DATA *pOutData;
    try
    {
        // Allocate output structure
        // first because it is also used in the catch clauses.
        // VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,

        txn_in.parray->rgsabound-
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) //
sanity error checking - for very rare case, but to be
sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txn_out-
>parray->pvData;

        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pOrderStatus = m_pTxn-
>BuffAddr_OrderStatus();

        memcpy(pOrderStatus, &pData-
>u.OrderStatus, sizeof(ORDER_STATUS_DATA));

        m_pTxn->OrderStatus();

        memcpy( &pOutData->u.OrderStatus,
pOrderStatus, sizeof(ORDER_STATUS_DATA));
    }
}

```

```

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
    }

    pOutData->retval = e-
>ErrorType();
    pOutData->error = e->ErrorNum();
    delete e;
    return E_TPCCCOM;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::OrderStatus."););
    pOutData->retval =
ERR_TYPE_LOGIC;
    pOutData->error = 0;
    m_bCanBePooled = FALSE;
    return E_TPCCCOM;
}
}

```

## ***tpcc\_com\_all. def***

; tpcc\_com\_all.def : Declares the module parameters.

```

LIBRARY      "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow      PRIVATE
    DllGetClassObject    PRIVATE
    DllRegisterServer    PRIVATE
    DllUnregisterServer  PRIVATE

```

## ***tpcc\_com\_all.h***

/\* this ALWAYS GENERATED file contains the definitions for the interfaces \*/

```

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
    Oicf, W1, Zp8, env=Win32 (32b run)
    protocol : dce , ms_ext, c_ext, robust

```

```

    error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany),
    __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 475
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

#if defined( _MSC_VER ) && ( _MSC_VER >= 1020 )
#pragma once
#endif

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__

#ifdef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__

#ifdef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

```

```

#ifdef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifdef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

#ifdef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#endif /* __TPCCLib_LIBRARY_DEFINED__

```

```

#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;

EXTERN_C const CLSID CLSID_TPCC;

#ifdef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-
00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifdef __cplusplus
class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-
00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifdef __cplusplus
class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-
00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifdef __cplusplus
class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-
00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifdef __cplusplus
class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-
00C04FBFE08B")
StockLevel;
#endif
#endif /* __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */
/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif
#endif

```

## tpcc\_com\_all\_i. C

```
/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
```

```
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,
0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
```

```
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64)*/

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, Wl, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \

DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)
```

```

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,
0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

```

```

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/

```

## **tpcc\_com\_errorcode.h**

```

/* FILE: TPCCOM_ERRORCODE.H
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Header file defining the error
code returned from ITPCC COM interface.
*
* Change history:
* 4.20.000 - first version
*/

// Error return value for methods in ITPCC interface.
//
// Define as 0x80042345 (decimal -2147212475 ).
//
const HRESULT E_TPCCOM = MAKE_HRESULT
(SEVERITY_ERROR, FACILITY_ITP, 0x2345);

```

## **tpcc\_com\_ps.def**

```

LIBRARY "tpcc_com_ps"

EXPORTS
    DllGetClassObject PRIVATE
    DllCanUnloadNow PRIVATE
    GetProxyDllInfo PRIVATE
    DllRegisterServer PRIVATE
    DllUnregisterServer PRIVATE

```

## **tpcc\_com\_ps.h**

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006

```

```

*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */

```



```

/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpsc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpsc_com_ps_0000_v0_0_s_ifspec;

#ifdef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

    MIDL_INTERFACE("FEEB6AA2-84B1-11d2-BA47-00C04FBE08B")
    ITPCC : public IUnknown
    {
    public:
        virtual HRESULT STDMETHODCALLTYPE NewOrder(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE Payment(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE Delivery(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE StockLevel(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE OrderStatus(
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out) = 0;

        virtual HRESULT STDMETHODCALLTYPE CallSetComplete(
            void) = 0;
    };

#else /* C style interface */

    typedef struct ITPCCVtbl
    {
        BEGIN_INTERFACE

        HRESULT ( STDMETHODCALLTYPE *QueryInterface
        )(
            ITPCC * This,
            /* [in] */ REFIID riid,
            /* [iid_is][out] */ void **ppvObject);

```

```

        ULONG ( STDMETHODCALLTYPE *AddRef )(
            ITPCC * This);

        ULONG ( STDMETHODCALLTYPE *Release )(
            ITPCC * This);

        HRESULT ( STDMETHODCALLTYPE *NewOrder )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *Payment )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *Delivery )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *StockLevel )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *OrderStatus )(
            ITPCC * This,
            /* [in] */ VARIANT txn_in,
            /* [out] */ VARIANT *txn_out);

        HRESULT ( STDMETHODCALLTYPE *CallSetComplete )(
            ITPCC * This);

        END_INTERFACE
    } ITPCCVtbl;

    interface ITPCC
    {
        CONST_VTBL struct ITPCCVtbl *lpVtbl;
    };

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl->QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lpVtbl->AddRef(This)

#define ITPCC_Release(This) \
    (This)->lpVtbl->Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lpVtbl->NewOrder(This,txn_in,txn_out)

#define ITPCC_Payment(This,txn_in,txn_out) \

```

```

    (This)->lpVtbl->Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lpVtbl->Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lpVtbl->StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lpVtbl->OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl->CallSetComplete(This)

#endif /* COBJMACROS */

/* C style interface */

HRESULT STDMETHODCALLTYPE ITPCC_NewOrder_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IrpcStubBuffer *This,
    IrpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Payment_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IrpcStubBuffer *This,
    IrpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Delivery_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IrpcStubBuffer *This,
    IrpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_StockLevel_Proxy(
    ITPCC * This,

```

```

/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
ITPCC * This,
/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
ITPCC * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
IRpcStubBuffer *This,
IRpcChannelBuffer *_pRpcChannelBuffer,
PRPC_MESSAGE _pRpcMessage,
DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long             __RPC_USER
VARIANT_UserSize(        unsigned long *, unsigned long
, VARIANT * );
unsigned char * __RPC_USER VARIANT_UserMarshal(
unsigned long *, unsigned char *, VARIANT * );
unsigned char * __RPC_USER
VARIANT_UserUnmarshal(unsigned long *, unsigned char
*, VARIANT * );
void                    __RPC_USER
VARIANT_UserFree(        unsigned long *, VARIANT * );

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif
#endif

```

## ***tpcc\_com\_ps. idl***

```

/* FILE: ITPCC.IDL
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Defines the interface used by
TPCC. This interface can be implemented by C++
components.
*
* Change history:
* 4.20.000 - first version
*/

// Forward declare all types defined
interface ITPCC;
import "oaidl.idl";
import "ocidl.idl";

[
    object,
    oleautomation,
    uuid(FEEB6AA2-84B1-11d2-BA47-
00C04FBFE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
interface ITPCC : IUnknown
{
    HRESULT __stdcall NewOrder(
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        )
    );
    HRESULT __stdcall Payment(
        (
            [in] VARIANT txn_in,
            [out] VARIANT *txn_out
        )
    );
    HRESULT __stdcall Delivery(
        (

```

```

[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
);
HRESULT __stdcall StockLevel(
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
);
HRESULT __stdcall OrderStatus(
(
[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
);
HRESULT __stdcall CallSetComplete(
(
);
}); // interface ITPCC

```

## ***tpcc\_com\_ps\_i .c***

```

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:

```

```

    __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

```

```

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0x0,
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64)*/

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else

```

```

#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0x0,
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/



---



tpcc_com_ps_  
p.c



---



```

/* this ALWAYS GENERATED file contains the proxy stub
code */

```


```

```

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/*
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif
#pragma warning( disable: 4100 ) /* unreferenced
arguments in x86 call */
#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity*/
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1023
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
short Pad;
unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{

```

```

short Pad;
unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}},{2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this
stub because it uses these features:
#error -Oif or -Oicf, [wire_marshal] or
[user_marshal] attribute.
#error However, your C/C++ compilation flags indicate
you intend to run this app on earlier systems.
#error This app will die there with the
RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
0,
{
/* Procedure NewOrder */

FC_AUTO_HANDLE */
0x33, /*
Old Flags: object, Oi2 */
/* 2 */ NdrFcLong( 0x0 ), /* 0 */
/* 6 */ NdrFcShort( 0x3 ), /* 3 */
/* 8 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */

```

```

0x3, /*
3 */
/* Parameter txn_in */
/* 16 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 18 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 20 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
/* Parameter txn_out */
/* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 24 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 26 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */
/* Return value */
/* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 30 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 32 */ 0x8, /* FC_LONG */
0x0, /*
0 */
/* Procedure Payment */
/* 34 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 36 */ NdrFcLong( 0x0 ), /* 0 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
3 */
/* Parameter txn_in */
/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 54 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
/* Parameter txn_out */
/* 56 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */

```

```

/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 60 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 66 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
/* 0x6c, /*
Old Flags: object, Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
/* 0x3, /*
3 */

/* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 88 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 94 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 100 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */

```

```

0x6c, /*
Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
/* 0x3, /*
3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 122 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 128 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 134 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure OrderStatus */

/* 136 */ 0x33, /* FC_AUTO_HANDLE */
/* 0x6c, /*
Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
/* 0x3, /*
3 */

/* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 156 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 158 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 162 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 164 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 168 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

/* Procedure CallSetComplete */

/* 170 */ 0x33, /* FC_AUTO_HANDLE */
/* 0x6c, /*
Old Flags: object, Oi2 */
/* 172 */ NdrFcLong( 0x0 ), /* 0 */
/* 176 */ NdrFcShort( 0x8 ), /* 8 */
/* 178 */ NdrFcShort( 0x8 ), /* x86 Stack
size/offset = 8 */
/* 180 */ NdrFcShort( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x8 ), /* 8 */
/* 184 */ 0x4, /* Oi2 Flags: has
return, */
/* 0x1, /*
1 */

/* Return value */

/* 186 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 188 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 190 */ 0x8, /* FC_LONG */
/* 0x0, /*
0 */

0x0
};

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /*
0 */
/* 2 */

```

```

                                0x12, 0x0, /*
FC_UP */
/* 4 */ NdrFcShort( 0x3ca ), /* Offset=
970 (974) */
/* 6 */
                                0x2b, /*
FC_NON_ENCAPSULATED_UNION */
                                0x9, /*
FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT
*/
                                0x0, /*
*/
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x2 ), /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ), /* 16 */
/* 16 */ NdrFcShort( 0x2f ), /* 47 */
/* 18 */ NdrFcLong( 0x14 ), /* 20 */
/* 22 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 24 */ NdrFcLong( 0x3 ), /* 3 */
/* 28 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 30 */ NdrFcLong( 0x11 ), /* 17 */
/* 34 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */
/* 36 */ NdrFcLong( 0x2 ), /* 2 */
/* 40 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 42 */ NdrFcLong( 0x4 ), /* 4 */
/* 46 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 48 */ NdrFcLong( 0x5 ), /* 5 */
/* 52 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 54 */ NdrFcLong( 0xb ), /* 11 */
/* 58 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 60 */ NdrFcLong( 0xa ), /* 10 */
/* 64 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 66 */ NdrFcLong( 0x6 ), /* 6 */
/* 70 */ NdrFcShort( 0xe8 ), /* Offset= 232 (302) */
/* 72 */ NdrFcLong( 0x7 ), /* 7 */
/* 76 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 78 */ NdrFcLong( 0x8 ), /* 8 */
/* 82 */ NdrFcShort( 0xe2 ), /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0xd ), /* 13 */
/* 88 */ NdrFcShort( 0xf4 ), /* Offset= 244 (332) */
/* 90 */ NdrFcLong( 0x9 ), /* 9 */
/* 94 */ NdrFcShort( 0x100 ), /* Offset=
256 (350) */
/* 96 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 100 */ NdrFcShort( 0x10c ), /* Offset=
268 (368) */
/* 102 */ NdrFcLong( 0x24 ), /* 36 */
/* 106 */ NdrFcShort( 0x31a ), /* Offset=
794 (900) */
/* 108 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 112 */ NdrFcShort( 0x314 ), /* Offset=
788 (900) */
/* 114 */ NdrFcLong( 0x4011 ), /* 16401 */

```

```

/* 118 */ NdrFcShort( 0x312 ), /* Offset=
786 (904) */
/* 120 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 124 */ NdrFcShort( 0x310 ), /* Offset=
784 (908) */
/* 126 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 130 */ NdrFcShort( 0x30e ), /* Offset=
782 (912) */
/* 132 */ NdrFcLong( 0x4014 ), /* 16404 */
/* 136 */ NdrFcShort( 0x30c ), /* Offset=
780 (916) */
/* 138 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 142 */ NdrFcShort( 0x30a ), /* Offset=
778 (920) */
/* 144 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 148 */ NdrFcShort( 0x308 ), /* Offset=
776 (924) */
/* 150 */ NdrFcLong( 0x400b ), /* 16395 */
/* 154 */ NdrFcShort( 0x2f2 ), /* Offset=
754 (908) */
/* 156 */ NdrFcLong( 0x400a ), /* 16394 */
/* 160 */ NdrFcShort( 0x2f0 ), /* Offset=
752 (912) */
/* 162 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 166 */ NdrFcShort( 0x2fa ), /* Offset=
762 (928) */
/* 168 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 172 */ NdrFcShort( 0x2f0 ), /* Offset=
752 (924) */
/* 174 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 178 */ NdrFcShort( 0x2f2 ), /* Offset=
754 (932) */
/* 180 */ NdrFcLong( 0x400d ), /* 16397 */
/* 184 */ NdrFcShort( 0x2f0 ), /* Offset=
752 (936) */
/* 186 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 190 */ NdrFcShort( 0x2ee ), /* Offset=
750 (940) */
/* 192 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 196 */ NdrFcShort( 0x2ec ), /* Offset=
748 (944) */
/* 198 */ NdrFcLong( 0x400c ), /* 16396 */
/* 202 */ NdrFcShort( 0x2ea ), /* Offset=
746 (948) */
/* 204 */ NdrFcLong( 0x10 ), /* 16 */
/* 208 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 210 */ NdrFcLong( 0x12 ), /* 18 */
/* 214 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 216 */ NdrFcLong( 0x13 ), /* 19 */
/* 220 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 222 */ NdrFcLong( 0x15 ), /* 21 */
/* 226 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 228 */ NdrFcLong( 0x16 ), /* 22 */
/* 232 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 234 */ NdrFcLong( 0x17 ), /* 23 */
/* 238 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 240 */ NdrFcLong( 0xe ), /* 14 */

```

```

/* 244 */ NdrFcShort( 0x2c8 ), /* Offset=
712 (956) */
/* 246 */ NdrFcLong( 0x400e ), /* 16398 */
/* 250 */ NdrFcShort( 0x2cc ), /* Offset=
716 (966) */
/* 252 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 256 */ NdrFcShort( 0x2ca ), /* Offset=
714 (970) */
/* 258 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 262 */ NdrFcShort( 0x286 ), /* Offset=
646 (908) */
/* 264 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 268 */ NdrFcShort( 0x284 ), /* Offset=
644 (912) */
/* 270 */ NdrFcLong( 0x4015 ), /* 16405 */
/* 274 */ NdrFcShort( 0x282 ), /* Offset=
642 (916) */
/* 276 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 280 */ NdrFcShort( 0x278 ), /* Offset=
632 (912) */
/* 282 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 286 */ NdrFcShort( 0x272 ), /* Offset=
626 (912) */
/* 288 */ NdrFcLong( 0x0 ), /* 0 */
/* 292 */ NdrFcShort( 0x0 ), /* Offset= 0 (292) */
/* 294 */ NdrFcLong( 0x1 ), /* 1 */
/* 298 */ NdrFcShort( 0x0 ), /* Offset= 0 (298) */
/* 300 */ NdrFcShort( 0xffff ), /* Offset= -1
(299) */
/* 302 */
                                0x15, /*
FC_STRUCT */
                                0x7, /*
7 */
/* 304 */ NdrFcShort( 0x8 ), /* 8 */
/* 306 */ 0xb, /* FC_HYPER */
                                0x5b, /*
FC_END */
/* 308 */
                                0x12, 0x0, /*
FC_UP */
/* 310 */ NdrFcShort( 0xc ), /* Offset= 12 (322) */
/* 312 */
                                0x1b, /*
FC_CARRAY */
                                0x1, /*
1 */
/* 314 */ NdrFcShort( 0x2 ), /* 2 */
/* 316 */ 0x9, /* Corr desc: FC_ULONG
*/
                                0x0, /*
*/
/* 318 */ NdrFcShort( 0xffffc ), /* -4 */
/* 320 */ 0x6, /* FC_SHORT */
                                0x5b, /*
FC_END */
/* 322 */
                                0x17, /*
FC_CSTRUCT */
                                0x3, /*
3 */
/* 324 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 326 */ NdrFcShort( 0xffff2 ), /* Offset= -
14 (312) */
/* 328 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 330 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 332 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 334 */ NdrFcLong( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ NdrFcShort( 0x0 ), /* 0 */
/* 342 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 344 */ 0x0, /* 0 */
0x0, /*
0 */
/* 346 */ 0x0, /* 0 */
0x0, /*
0 */
/* 348 */ 0x0, /* 0 */
0x46, /*
70 */
/* 350 */
0x2E, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 352 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 356 */ NdrFcShort( 0x0 ), /* 0 */
/* 358 */ NdrFcShort( 0x0 ), /* 0 */
/* 360 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 362 */ 0x0, /* 0 */
0x0, /*
0 */
/* 364 */ 0x0, /* 0 */
0x0, /*
0 */
/* 366 */ 0x0, /* 0 */
0x46, /*
70 */
/* 368 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 370 */ NdrFcShort( 0x2 ), /* Offset= 2 (372) */
/* 372 */
0x12, 0x0, /*
FC_UP */
/* 374 */ NdrFcShort( 0x1fc ), /* Offset=
508 (882) */
/* 376 */
0x2a, /*
FC_ENCAPSULATED_UNION */
0x49, /*
73 */
/* 378 */ NdrFcShort( 0x18 ), /* 24 */

```

```

/* 380 */ NdrFcShort( 0xa ), /* 10 */
/* 382 */ NdrFcLong( 0x8 ), /* 8 */
/* 386 */ NdrFcShort( 0x58 ), /* Offset= 88 (474) */
/* 388 */ NdrFcLong( 0xd ), /* 13 */
/* 392 */ NdrFcShort( 0x78 ), /* Offset= 120 (512) */
/* 394 */ NdrFcLong( 0x9 ), /* 9 */
/* 398 */ NdrFcShort( 0x94 ), /* Offset= 148 (546) */
/* 400 */ NdrFcLong( 0xc ), /* 12 */
/* 404 */ NdrFcShort( 0xbc ), /* Offset= 188 (592) */
/* 406 */ NdrFcLong( 0x24 ), /* 36 */
/* 410 */ NdrFcShort( 0x114 ), /* Offset=
276 (686) */
/* 412 */ NdrFcLong( 0x800d ), /* 32781 */
/* 416 */ NdrFcShort( 0x130 ), /* Offset=
304 (720) */
/* 418 */ NdrFcLong( 0x10 ), /* 16 */
/* 422 */ NdrFcShort( 0x148 ), /* Offset=
328 (750) */
/* 424 */ NdrFcLong( 0x2 ), /* 2 */
/* 428 */ NdrFcShort( 0x160 ), /* Offset=
352 (780) */
/* 430 */ NdrFcLong( 0x3 ), /* 3 */
/* 434 */ NdrFcShort( 0x178 ), /* Offset=
376 (810) */
/* 436 */ NdrFcLong( 0x14 ), /* 20 */
/* 440 */ NdrFcShort( 0x190 ), /* Offset=
400 (840) */
/* 442 */ NdrFcShort( 0xffff ), /* Offset= -1
(441) */
/* 444 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 446 */ NdrFcShort( 0x4 ), /* 4 */
/* 448 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 454 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 456 */ NdrFcShort( 0x4 ), /* 4 */
/* 458 */ NdrFcShort( 0x0 ), /* 0 */
/* 460 */ NdrFcShort( 0x1 ), /* 1 */
/* 462 */ NdrFcShort( 0x0 ), /* 0 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x12, 0x0, /* FC_UP */
/* 468 */ NdrFcShort( 0xff6e ), /* Offset= -
146 (322) */
/* 470 */
0x5b, /*
FC_END */

```

```

0x8, /*
FC_LONG */
/* 472 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 474 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 476 */ NdrFcShort( 0x8 ), /* 8 */
/* 478 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 480 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 482 */ NdrFcShort( 0x4 ), /* 4 */
/* 484 */ NdrFcShort( 0x4 ), /* 4 */
/* 486 */ 0x11, 0x0, /* FC_RP */
/* 488 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (444) */
/* 490 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 492 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 494 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 496 */ NdrFcShort( 0x0 ), /* 0 */
/* 498 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 500 */ NdrFcShort( 0x0 ), /* 0 */
/* 502 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 506 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 508 */ NdrFcShort( 0xff50 ), /* Offset= -
176 (332) */
/* 510 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 512 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 514 */ NdrFcShort( 0x8 ), /* 8 */
/* 516 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 518 */ NdrFcShort( 0x6 ), /* Offset= 6 (524) */
/* 520 */ 0x8, /* FC_LONG */
/* 522 */ 0x5c, /* FC_PAD */
/* 524 */
FC_POINTER */
/* 526 */ NdrFcShort( 0xffe0 ), /* Offset= -
32 (494) */
/* 528 */
FC_BOGUS_ARRAY */
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
/* 534 */ NdrFcShort( 0x0 ), /* 0 */
/* 536 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
/* 542 */ NdrFcShort( 0xff40 ), /* Offset= -
192 (350) */
/* 544 */ 0x5c, /* FC_PAD */
/* 546 */
FC_BOGUS_STRUCT */
/* 548 */ NdrFcShort( 0x8 ), /* 8 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
/* 556 */ 0x5c, /* FC_PAD */
/* 558 */
FC_POINTER */
/* 560 */ NdrFcShort( 0xffe0 ), /* Offset= -
32 (528) */
/* 562 */
FC_CARRAY */
/* 564 */ NdrFcShort( 0x4 ), /* 4 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
/* 568 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 570 */
FC_PP */
/* 572 */
FC_VARIABLE_REPEAT */
/* 574 */ NdrFcShort( 0x4 ), /* 4 */
/* 576 */ NdrFcShort( 0x0 ), /* 0 */
/* 578 */ NdrFcShort( 0x1 ), /* 1 */
/* 580 */ NdrFcShort( 0x0 ), /* 0 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ 0x12, 0x0, /* FC_UP */
/* 586 */ NdrFcShort( 0x184 ), /* Offset=
388 (974) */
/* 588 */
FC_END */
/* 590 */ 0x5c, /* FC_PAD */
/* 592 */
FC_BOGUS_STRUCT */
/* 594 */ NdrFcShort( 0x8 ), /* 8 */
/* 596 */ NdrFcShort( 0x0 ), /* 0 */
/* 598 */ NdrFcShort( 0x6 ), /* Offset= 6 (604) */
/* 600 */ 0x8, /* FC_LONG */
/* 602 */ 0x5c, /* FC_PAD */
/* 604 */
FC_END */
/* 606 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (562) */
/* 608 */
FC_IP */
/* 610 */ NdrFcLong( 0x2f ), /* 47 */
/* 614 */ NdrFcShort( 0x0 ), /* 0 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ 0xc0, /* 192 */
/* 620 */ 0x0, /* 0 */
/* 622 */ 0x0, /* 0 */
/* 624 */ 0x0, /* 0 */

```

```

/* 624 */ 0x0, /* 0 */
/* 626 */
FC_CARRAY */
/* 628 */ NdrFcShort( 0x1 ), /* 1 */
/* 630 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
/* 632 */ NdrFcShort( 0x4 ), /* 4 */
/* 634 */ 0x1, /* FC_BYTE */
/* 636 */
FC_BOGUS_STRUCT */
/* 638 */ NdrFcShort( 0x10 ), /* 16 */
/* 640 */ NdrFcShort( 0x0 ), /* 0 */
/* 642 */ NdrFcShort( 0xa ), /* Offset= 10 (652) */
/* 644 */ 0x8, /* FC_LONG */
/* 646 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
/* 648 */ NdrFcShort( 0xffd8 ), /* Offset= -
40 (608) */
/* 650 */ 0x36, /* FC_POINTER */
/* 652 */
FC_UP */
/* 654 */ NdrFcShort( 0xffe4 ), /* Offset= -
28 (626) */
/* 656 */
FC_CARRAY */
/* 658 */ NdrFcShort( 0x4 ), /* 4 */
/* 660 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
/* 662 */ NdrFcShort( 0x0 ), /* 0 */
/* 664 */
FC_PP */
/* 666 */
FC_VARIABLE_REPEAT */
/* 668 */ NdrFcShort( 0x4 ), /* 4 */

```



```

/* 668 */ NdrFcShort( 0x4 ), /* 4 */
/* 670 */ NdrFcShort( 0x0 ), /* 0 */
/* 672 */ NdrFcShort( 0x1 ), /* 1 */
/* 674 */ NdrFcShort( 0x0 ), /* 0 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ 0x12, 0x0, /* FC_UP */
/* 680 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (636) */
/* 682 */
FC_END */
0x5b, /*
FC_LONG */
0x8, /*
/* 684 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 686 */
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 688 */ NdrFcShort( 0x8 ), /* 8 */
/* 690 */ NdrFcShort( 0x0 ), /* 0 */
/* 692 */ NdrFcShort( 0x6 ), /* Offset= 6 (698) */
/* 694 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 696 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 698 */
FC_RP */
/* 700 */ NdrFcShort( 0xffd4 ), /* Offset= -
44 (656) */
/* 702 */
0x1d, /*
FC_SMFARRAY */
0x0, /*
0 */
/* 704 */ NdrFcShort( 0x8 ), /* 8 */
/* 706 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 708 */
FC_STRUCT */
0x15, /*
0x3, /*
3 */
/* 710 */ NdrFcShort( 0x10 ), /* 16 */
/* 712 */ 0x8, /* FC_LONG */
0x6, /*
FC_SHORT */
/* 714 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 716 */ 0x0, /* 0 */
NdrFcShort( 0xffff1 ),
/* Offset= -15 (702) */
0x5b, /*
FC_END */
/* 720 */

```

```

0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 722 */ NdrFcShort( 0x18 ), /* 24 */
/* 724 */ NdrFcShort( 0x0 ), /* 0 */
/* 726 */ NdrFcShort( 0xa ), /* Offset= 10 (736) */
/* 728 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 730 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
*/
0x0, /*
0 */
/* 732 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (708) */
/* 734 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 736 */
0x11, 0x0, /*
FC_RP */
/* 738 */ NdrFcShort( 0xff0c ), /* Offset= -
244 (494) */
/* 740 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 742 */ NdrFcShort( 0x1 ), /* 1 */
/* 744 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 746 */ NdrFcShort( 0x0 ), /* 0 */
/* 748 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 750 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 752 */ NdrFcShort( 0x8 ), /* 8 */
/* 754 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 756 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 758 */ NdrFcShort( 0x4 ), /* 4 */
/* 760 */ NdrFcShort( 0x4 ), /* 4 */
/* 762 */ 0x12, 0x0, /* FC_UP */
/* 764 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (740) */
/* 766 */
0x5b, /*
FC_END */

```

```

0x8, /*
FC_LONG */
/* 768 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 770 */
FC_CARRAY */
0x1b, /*
0x1, /*
1 */
/* 772 */ NdrFcShort( 0x2 ), /* 2 */
/* 774 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 780 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 782 */ NdrFcShort( 0x8 ), /* 8 */
/* 784 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 786 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 788 */ NdrFcShort( 0x4 ), /* 4 */
/* 790 */ NdrFcShort( 0x4 ), /* 4 */
/* 792 */ 0x12, 0x0, /* FC_UP */
/* 794 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (770) */
/* 796 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 798 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 800 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 802 */ NdrFcShort( 0x4 ), /* 4 */
/* 804 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 806 */ NdrFcShort( 0x0 ), /* 0 */
/* 808 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */

```

```

/* 810 */
FC_PSTRUCT */
3 */
/* 812 */ NdrFcShort( 0x8 ), /* 8 */
/* 814 */
FC_PP */
FC_PAD */
/* 816 */
FC_NO_REPEAT */
FC_PAD */
/* 818 */ NdrFcShort( 0x4 ), /* 4 */
/* 820 */ NdrFcShort( 0x4 ), /* 4 */
/* 822 */ 0x12, 0x0, /* FC_UP */
/* 824 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (800) */
/* 826 */
FC_END */
FC_LONG */
/* 828 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 830 */
FC_CARRAY */
0x1b, /*
7 */
/* 832 */ NdrFcShort( 0x8 ), /* 8 */
/* 834 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 836 */ NdrFcShort( 0x0 ), /* 0 */
/* 838 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 840 */
FC_PSTRUCT */
0x3, /*
3 */
/* 842 */ NdrFcShort( 0x8 ), /* 8 */
/* 844 */
FC_PP */
FC_PAD */
/* 846 */
FC_NO_REPEAT */
FC_PAD */
/* 848 */ NdrFcShort( 0x4 ), /* 4 */
/* 850 */ NdrFcShort( 0x4 ), /* 4 */
/* 852 */ 0x12, 0x0, /* FC_UP */

```

```

/* 854 */ NdrFcShort( 0xffe8 ), /* Offset= -
24 (830) */
/* 856 */
FC_END */
0x5b, /*
FC_LONG */
/* 858 */ 0x8, /* FC_LONG */
FC_END */
/* 860 */
FC_STRUCT */
0x15, /*
3 */
/* 862 */ NdrFcShort( 0x8 ), /* 8 */
/* 864 */ 0x8, /* FC_LONG */
FC_LONG */
/* 866 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 868 */
FC_CARRAY */
0x1b, /*
3 */
/* 870 */ NdrFcShort( 0x8 ), /* 8 */
/* 872 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 874 */ NdrFcShort( 0xffd8 ), /* -40 */
/* 876 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0 */
/* 878 */ NdrFcShort( 0xffee ), /* Offset= -
18 (860) */
/* 880 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 882 */
FC_BOGUS_STRUCT */
0x1a, /*
3 */
/* 884 */ NdrFcShort( 0x28 ), /* 40 */
/* 886 */ NdrFcShort( 0xffee ), /* Offset= -
18 (868) */
/* 888 */ NdrFcShort( 0x0 ), /* Offset= 0 (888) */
/* 890 */ 0x6, /* FC_SHORT */
0x6, /*
FC_SHORT */
/* 892 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 894 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0 */

```

```

/* 896 */ NdrFcShort( 0xfd8 ), /* Offset= -
520 (376) */
/* 898 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 900 */
FC_UP */
/* 902 */ NdrFcShort( 0xfef6 ), /* Offset= -
266 (636) */
/* 904 */
FC_UP [simple_pointer] */
/* 906 */ 0x1, /* FC_BYTE */
0x5c, /*
FC_PAD */
/* 908 */
FC_UP [simple_pointer] */
/* 910 */ 0x6, /* FC_SHORT */
0x5c, /*
FC_PAD */
/* 912 */
FC_UP [simple_pointer] */
/* 914 */ 0x8, /* FC_LONG */
0x5c, /*
FC_PAD */
/* 916 */
FC_UP [simple_pointer] */
/* 918 */ 0xb, /* FC_HYPER */
0x5c, /*
FC_PAD */
/* 920 */
FC_UP [simple_pointer] */
/* 922 */ 0xa, /* FC_FLOAT */
0x5c, /*
FC_PAD */
/* 924 */
FC_UP [simple_pointer] */
/* 926 */ 0xc, /* FC_DOUBLE */
0x5c, /*
FC_PAD */
/* 928 */
FC_UP */
/* 930 */ NdrFcShort( 0xfd8c ), /* Offset= -
628 (302) */
/* 932 */
FC_UP [pointer_deref] */
/* 934 */ NdrFcShort( 0xfd8e ), /* Offset= -
626 (308) */
/* 936 */
FC_UP [pointer_deref] */
/* 938 */ NdrFcShort( 0xfda2 ), /* Offset= -
606 (332) */
/* 940 */

```

```

                                0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 942 */ NdrFcShort( 0xfdb0 ),      /* Offset= -
592 (350) */
/* 944 */
                                0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 946 */ NdrFcShort( 0xfdb6 ),      /* Offset= -
578 (368) */
/* 948 */
                                0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 950 */ NdrFcShort( 0x2 ), /* Offset= 2 (952) */
/* 952 */
                                0x12, 0x0,      /*
FC_UP */
/* 954 */ NdrFcShort( 0x14 ), /* Offset= 20 (974) */
/* 956 */
FC_STRUCT */
                                0x7,      /*
7 */
/* 958 */ NdrFcShort( 0x10 ), /* 16 */
/* 960 */ 0x6, /* FC_SHORT */
                                0x1,      /*
FC_BYTE */
/* 962 */ 0x1, /* FC_BYTE */
                                0x8,      /*
FC_LONG */
/* 964 */ 0xb, /* FC_HYPER */
                                0x5b,      /*
FC_END */
/* 966 */
                                0x12, 0x0,      /*
FC_UP */
/* 968 */ NdrFcShort( 0xffff4 ), /* Offset= -
12 (956) */
/* 970 */
                                0x12, 0x8,      /*
FC_UP [simple_pointer] */
/* 972 */ 0x2, /* FC_CHAR */
                                0x5c,      /*
FC_PAD */
/* 974 */
                                0x1a,      /*
FC_BOGUS_STRUCT */
                                0x7,      /*
7 */
/* 976 */ NdrFcShort( 0x20 ), /* 32 */
/* 978 */ NdrFcShort( 0x0 ), /* 0 */
/* 980 */ NdrFcShort( 0x0 ), /* Offset= 0 (980) */
/* 982 */ 0x8, /* FC_LONG */
                                0x8,      /*
FC_LONG */
/* 984 */ 0x6, /* FC_SHORT */
FC_SHORT */
/* 986 */ 0x6, /* FC_SHORT */
                                0x6,      /*
FC_SHORT */
/* 988 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/

```

```

                                0x0,      /*
0 */
/* 990 */ NdrFcShort( 0xfc28 ), /* Offset= -
984 (6) */
/* 992 */ 0x5c, /* FC_PAD */
                                0x5b,      /*
FC_END */
/* 994 */ 0xb4, /* FC_USER_MARSHAL */
                                0x83,      /*
131 */
/* 996 */ NdrFcShort( 0x0 ), /* 0 */
/* 998 */ NdrFcShort( 0x10 ), /* 16 */
/* 1000 */ NdrFcShort( 0x0 ), /* 0 */
/* 1002 */ NdrFcShort( 0xfc18 ), /*
Offset= -1000 (2) */
/* 1004 */
                                0x11, 0x4,      /*
FC_RP [allocated_on_stack] */
/* 1006 */ NdrFcShort( 0x6 ), /* Offset= 6
(1012) */
/* 1008 */
                                0x13, 0x0,      /*
FC_OP */
/* 1010 */ NdrFcShort( 0xffdc ), /*
Offset= -36 (974) */
/* 1012 */ 0xb4, /*
FC_USER_MARSHAL */
                                0x83,      /*
131 */
/* 1014 */ NdrFcShort( 0x0 ), /* 0 */
/* 1016 */ NdrFcShort( 0x10 ), /* 16 */
/* 1018 */ NdrFcShort( 0x0 ), /* 0 */
/* 1020 */ NdrFcShort( 0xffff4 ), /*
Offset= -12 (1008) */
                                0x0
}
};

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,

```

```

GUID={0x00000000,0x0000,0x0000,{0xc0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xc0,0
x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete
*/
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,

```

```

    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x20000, /* Ndr library version */
    0,
    0x6000169, /* MIDL Version 6.0.361 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* cs routines */
    0, /* proxy/server info */
    0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpsc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl *) &ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpsc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl *) &ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpsc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;

```

```

        return 1;
    }
}

return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
    _tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
    _tpcc_com_ps_StubVtblList,
    (const PCInterfaceName *) &
    _tpcc_com_ps_InterfaceNamesList,
    0, /* no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};
#endif /* !defined(_M_IA64) && !defined(_M_AMD64) */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#endif
#pragma warning(push)
#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity*/
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1003
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}},{2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

```

```

        return 1;
    }
}

return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
    _tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
    _tpcc_com_ps_StubVtblList,
    (const PCInterfaceName *) &
    _tpcc_com_ps_InterfaceNamesList,
    0, /* no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};
#endif /* !defined(_M_IA64) && !defined(_M_AMD64) */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#endif
#pragma warning(push)
#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity*/
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1003
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}},{2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

```

```

#if !defined(__RPC_WIN64__)
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
        /* 8 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
        /* 10 */ NdrFcShort( 0x0 ), /* 0 */
        /* 12 */ NdrFcShort( 0x8 ), /* 8 */
        /* 14 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3, /* 3 */
        /* 16 */ 0xa, /* 10 */
        0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
        /* 18 */ NdrFcShort( 0x20 ), /* 32 */
        /* 20 */ NdrFcShort( 0x20 ), /* 32 */
        /* 22 */ NdrFcShort( 0x0 ), /* 0 */
        /* 24 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */
        /* 26 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
        /* 28 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
        /* 30 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

        /* Parameter txn_out */
        /* 32 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
        /* 34 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
        /* 36 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

        /* Return value */
        /* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
        /* 40 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
        /* 42 */ 0x8, /* FC_LONG */
        0x0, /* 0 */
    }
}

```

```

/* Procedure Payment */
/* 44 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
/* 52 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* 3 */
/* 60 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */
/* 70 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 72 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 74 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */
/* 76 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 78 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 80 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */
/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 84 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 86 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Delivery */
/* 88 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
/* 96 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */

```

```

/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* 3 */
/* 104 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */
/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 116 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 118 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */
/* 120 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 122 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 124 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */
/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 128 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 130 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure StockLevel */
/* 132 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
/* 140 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* 3 */
/* 148 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr desc, clt corr check, srv corr
check, */

```

```

/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 160 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 162 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 166 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 168 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 172 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 174 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /* Procedure OrderStatus */

/* 176 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
/* 184 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /*
3 */
/* 192 */ 0xa, /* 10 */
0x7, /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 204 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 206 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 210 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 212 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 216 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 218 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /* Procedure CallSetComplete */

/* 220 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44, /* Oi2 Flags: has
return, has ext, */
0x1, /*
1 */
/* 236 */ 0xa, /* 10 */
0x1, /*
Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

    /* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 250 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /*
0x0
*/
};

```

```

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /*
0 */
/* 2 */
0x12, 0x0, /*
FC_UP */
/* 4 */ NdrFcShort( 0x3b6 ), /* Offset=
950 (954) */
/* 6 */
0x2b, /*
FC_NON_ENCAPSULATED_UNION */
0x9, /*
FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 14 */ NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */ NdrFcShort( 0x10 ), /* 16 */
/* 18 */ NdrFcShort( 0x2f ), /* 47 */
/* 20 */ NdrFcLong( 0x14 ), /* 20 */
/* 24 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 26 */ NdrFcLong( 0x3 ), /* 3 */
/* 30 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 32 */ NdrFcLong( 0x11 ), /* 17 */
/* 36 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */
/* 38 */ NdrFcLong( 0x2 ), /* 2 */
/* 42 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 44 */ NdrFcLong( 0x4 ), /* 4 */
/* 48 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 50 */ NdrFcLong( 0x5 ), /* 5 */
/* 54 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 56 */ NdrFcLong( 0xb ), /* 11 */
/* 60 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 62 */ NdrFcLong( 0xa ), /* 10 */
/* 66 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 68 */ NdrFcLong( 0x6 ), /* 6 */
/* 72 */ NdrFcShort( 0xe8 ), /* Offset= 232 (304) */
/* 74 */ NdrFcLong( 0x7 ), /* 7 */
/* 78 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 80 */ NdrFcLong( 0x8 ), /* 8 */
/* 84 */ NdrFcShort( 0xe2 ), /* Offset= 226 (310) */
/* 86 */ NdrFcLong( 0xd ), /* 13 */
/* 90 */ NdrFcShort( 0xf6 ), /* Offset= 246 (336) */
/* 92 */ NdrFcLong( 0x9 ), /* 9 */
/* 96 */ NdrFcShort( 0x102 ), /* Offset=
258 (354) */

```

```

/* 98 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 102 */ NdrFcShort( 0x10e ), /* Offset=
270 (372) */
/* 104 */ NdrFcLong( 0x24 ), /* 36 */
/* 108 */ NdrFcShort( 0x304 ), /* Offset=
772 (880) */
/* 110 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 114 */ NdrFcShort( 0x2fe ), /* Offset=
766 (880) */
/* 116 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 120 */ NdrFcShort( 0x2fc ), /* Offset=
764 (884) */
/* 122 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 126 */ NdrFcShort( 0x2fa ), /* Offset=
762 (888) */
/* 128 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 132 */ NdrFcShort( 0x2f8 ), /* Offset=
760 (892) */
/* 134 */ NdrFcLong( 0x4014 ), /* 16404 */
/* 138 */ NdrFcShort( 0x2f6 ), /* Offset=
758 (896) */
/* 140 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 144 */ NdrFcShort( 0x2f4 ), /* Offset=
756 (900) */
/* 146 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 150 */ NdrFcShort( 0x2f2 ), /* Offset=
754 (904) */
/* 152 */ NdrFcLong( 0x400b ), /* 16395 */
/* 156 */ NdrFcShort( 0x2dc ), /* Offset=
732 (888) */
/* 158 */ NdrFcLong( 0x400a ), /* 16394 */
/* 162 */ NdrFcShort( 0x2da ), /* Offset=
730 (892) */
/* 164 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 168 */ NdrFcShort( 0x2e4 ), /* Offset=
740 (908) */
/* 170 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 174 */ NdrFcShort( 0x2da ), /* Offset=
730 (904) */
/* 176 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 180 */ NdrFcShort( 0x2dc ), /* Offset=
732 (912) */
/* 182 */ NdrFcLong( 0x400d ), /* 16397 */
/* 186 */ NdrFcShort( 0x2da ), /* Offset=
730 (916) */
/* 188 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 192 */ NdrFcShort( 0x2d8 ), /* Offset=
728 (920) */
/* 194 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 198 */ NdrFcShort( 0x2d6 ), /* Offset=
726 (924) */
/* 200 */ NdrFcLong( 0x400c ), /* 16396 */
/* 204 */ NdrFcShort( 0x2d4 ), /* Offset=
724 (928) */
/* 206 */ NdrFcLong( 0x10 ), /* 16 */
/* 210 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 212 */ NdrFcLong( 0x12 ), /* 18 */
/* 216 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 218 */ NdrFcLong( 0x13 ), /* 19 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */

```

```

/* 224 */ NdrFcLong( 0x15 ), /* 21 */
/* 228 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 230 */ NdrFcLong( 0x16 ), /* 22 */
/* 234 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 236 */ NdrFcLong( 0x17 ), /* 23 */
/* 240 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 242 */ NdrFcLong( 0xe ), /* 14 */
/* 246 */ NdrFcShort( 0x2b2 ), /* Offset=
690 (936) */
/* 248 */ NdrFcLong( 0x400e ), /* 16398 */
/* 252 */ NdrFcShort( 0x2b6 ), /* Offset=
694 (946) */
/* 254 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 258 */ NdrFcShort( 0x2b4 ), /* Offset=
692 (950) */
/* 260 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 264 */ NdrFcShort( 0x270 ), /* Offset=
624 (888) */
/* 266 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 270 */ NdrFcShort( 0x26e ), /* Offset=
622 (892) */
/* 272 */ NdrFcLong( 0x4015 ), /* 16405 */
/* 276 */ NdrFcShort( 0x26c ), /* Offset=
620 (896) */
/* 278 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 282 */ NdrFcShort( 0x262 ), /* Offset=
610 (892) */
/* 284 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 288 */ NdrFcShort( 0x25c ), /* Offset=
604 (892) */
/* 290 */ NdrFcLong( 0x0 ), /* 0 */
/* 294 */ NdrFcShort( 0x0 ), /* Offset= 0 (294) */
/* 296 */ NdrFcLong( 0x1 ), /* 1 */
/* 300 */ NdrFcShort( 0x0 ), /* Offset= 0 (300) */
/* 302 */ NdrFcShort( 0xffff ), /* Offset= -1
(301) */
/* 304 */
FC_STRUCT */
0x15, /*
0x7, /*
7 */
/* 306 */ NdrFcShort( 0x8 ), /* 8 */
/* 308 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 310 */
0x12, 0x0, /*
FC_UP */
/* 312 */ NdrFcShort( 0xe ), /* Offset= 14 (326) */
/* 314 */
0x1b, /*
FC_CARRAY */
0x1, /*
1 */
/* 316 */ NdrFcShort( 0x2 ), /* 2 */
/* 318 */ 0x9, /* Corr desc: FC_ULONG
*/
0x0, /*
*/
/* 320 */ NdrFcShort( 0xfffc ), /* -4 */

```

```

/* 322 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 324 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 326 */
FC_CSTRUCT */
0x17, /*
0x3, /*
3 */
/* 328 */ NdrFcShort( 0x8 ), /* 8 */
/* 330 */ NdrFcShort( 0xffff0 ), /* Offset= -
16 (314) */
/* 332 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 334 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 336 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 338 */ NdrFcLong( 0x0 ), /* 0 */
/* 342 */ NdrFcShort( 0x0 ), /* 0 */
/* 344 */ NdrFcShort( 0x0 ), /* 0 */
/* 346 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 348 */ 0x0, /* 0 */
0x0, /*
0 */
/* 350 */ 0x0, /* 0 */
0x0, /*
0 */
/* 352 */ 0x0, /* 0 */
0x46, /*
70 */
/* 354 */
0x2f, /*
0x5a, /*
FC_CONSTANT_IID */
/* 356 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 360 */ NdrFcShort( 0x0 ), /* 0 */
/* 362 */ NdrFcShort( 0x0 ), /* 0 */
/* 364 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 366 */ 0x0, /* 0 */
0x0, /*
0 */
/* 368 */ 0x0, /* 0 */
0x0, /*
0 */
/* 370 */ 0x0, /* 0 */
0x46, /*
70 */
/* 372 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 374 */ NdrFcShort( 0x2 ), /* Offset= 2 (376) */

```

```

/* 376 */
FC_UP */
/* 378 */ NdrFcShort( 0x1e4 ), /* Offset=
484 (862) */
/* 380 */
FC_ENCAPSULATED_UNION */
0x2a, /*
0x89, /*
137 */
/* 382 */ NdrFcShort( 0x20 ), /* 32 */
/* 384 */ NdrFcShort( 0xa ), /* 10 */
/* 386 */ NdrFcLong( 0x8 ), /* 8 */
/* 390 */ NdrFcShort( 0x50 ), /* Offset= 80 (470) */
/* 392 */ NdrFcLong( 0xd ), /* 13 */
/* 396 */ NdrFcShort( 0x70 ), /* Offset= 112 (508) */
/* 398 */ NdrFcLong( 0x9 ), /* 9 */
/* 402 */ NdrFcShort( 0x90 ), /* Offset= 144 (546) */
/* 404 */ NdrFcLong( 0xc ), /* 12 */
/* 408 */ NdrFcShort( 0xb0 ), /* Offset= 176 (584) */
/* 410 */ NdrFcLong( 0x24 ), /* 36 */
/* 414 */ NdrFcShort( 0x102 ), /* Offset=
258 (672) */
/* 416 */ NdrFcLong( 0x800d ), /* 32781 */
/* 420 */ NdrFcShort( 0x11e ), /* Offset=
286 (706) */
/* 422 */ NdrFcLong( 0x10 ), /* 16 */
/* 426 */ NdrFcShort( 0x138 ), /* Offset=
312 (738) */
/* 428 */ NdrFcLong( 0x2 ), /* 2 */
/* 432 */ NdrFcShort( 0x14e ), /* Offset=
334 (766) */
/* 434 */ NdrFcLong( 0x3 ), /* 3 */
/* 438 */ NdrFcShort( 0x164 ), /* Offset=
356 (794) */
/* 440 */ NdrFcLong( 0x14 ), /* 20 */
/* 444 */ NdrFcShort( 0x17a ), /* Offset=
378 (822) */
/* 446 */ NdrFcShort( 0xffff ), /* Offset= -1
(445) */
/* 448 */
FC_BOGUS_ARRAY */
0x21, /*
0x3, /*
3 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 454 */ NdrFcShort( 0x0 ), /* 0 */
/* 456 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 458 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 462 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 464 */
0x12, 0x0, /*
FC_UP */
/* 466 */ NdrFcShort( 0xff74 ), /* Offset= -
140 (326) */
/* 468 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */

```

```

/* 470 */
FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 472 */ NdrFcShort( 0x10 ), /* 16 */
/* 474 */ NdrFcShort( 0x0 ), /* 0 */
/* 476 */ NdrFcShort( 0x6 ), /* Offset= 6 (482) */
/* 478 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 480 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 482 */
0x11, 0x0, /*
FC_RP */
/* 484 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (448) */
/* 486 */
0x21, /*
0x3, /*
3 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 496 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 500 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 502 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 504 */ NdrFcShort( 0xff58 ), /* Offset= -
168 (336) */
/* 506 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 508 */
0x1a, /*
0x3, /*
3 */
/* 510 */ NdrFcShort( 0x10 ), /* 16 */
/* 512 */ NdrFcShort( 0x0 ), /* 0 */
/* 514 */ NdrFcShort( 0x6 ), /* Offset= 6 (520) */
/* 516 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 518 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 520 */
0x11, 0x0, /*
FC_RP */
/* 522 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (486) */
/* 524 */

```

```

0x21, /*
0x3, /*
3 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 534 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 538 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 542 */ NdrFcShort( 0xff44 ), /* Offset= -
188 (354) */
/* 544 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 546 */
0x1a, /*
0x3, /*
3 */
/* 548 */ NdrFcShort( 0x10 ), /* 16 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 556 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 558 */
0x11, 0x0, /*
FC_RP */
/* 560 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (524) */
/* 562 */
0x21, /*
0x3, /*
3 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
/* 570 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 572 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 576 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 578 */
0x12, 0x0, /*
FC_UP */
/* 580 */ NdrFcShort( 0x176 ), /* Offset=
374 (954) */
/* 582 */ 0x5c, /* FC_PAD */

```



```

0x5b, /*
FC_END */
/* 584 */
FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 586 */ NdrFcShort( 0x10 ), /* 16 */
/* 588 */ NdrFcShort( 0x0 ), /* 0 */
/* 590 */ NdrFcShort( 0x6 ), /* Offset= 6 (596) */
/* 592 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 594 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 596 */
0x11, 0x0, /*
FC_RP */
/* 598 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (562) */
/* 600 */
0x2E, /*
0x5a, /*
FC_CONSTANT_IID */
/* 602 */ NdrFcLong( 0x2f ), /* 47 */
/* 606 */ NdrFcShort( 0x0 ), /* 0 */
/* 608 */ NdrFcShort( 0x0 ), /* 0 */
/* 610 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 612 */ 0x0, /* 0 */
0x0, /*
0 */
/* 614 */ 0x0, /* 0 */
0x0, /*
0 */
/* 616 */ 0x0, /* 0 */
0x46, /*
70 */
/* 618 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 620 */ NdrFcShort( 0x1 ), /* 1 */
/* 622 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 624 */ NdrFcShort( 0x4 ), /* 4 */
/* 626 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 628 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 630 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 632 */ NdrFcShort( 0x18 ), /* 24 */

```

```

/* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 636 */ NdrFcShort( 0xa ), /* Offset= 10 (646) */
/* 638 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 640 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 642 */ NdrFcShort( 0xffd6 ), /* Offset= -
42 (600) */
/* 644 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 646 */
0x12, 0x0, /*
FC_UP */
/* 648 */ NdrFcShort( 0xffe2 ), /* Offset= -
30 (618) */
/* 650 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 654 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 656 */ NdrFcShort( 0x0 ), /* 0 */
/* 658 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 660 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 664 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 666 */
0x12, 0x0, /*
FC_UP */
/* 668 */ NdrFcShort( 0xffda ), /* Offset= -
38 (630) */
/* 670 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 672 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ NdrFcShort( 0x6 ), /* Offset= 6 (684) */
/* 680 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 682 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 684 */
0x11, 0x0, /*
FC_RP */
/* 686 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (650) */
/* 688 */

```

```

0x1d, /*
FC_SMFARRAY */
0x0, /*
0 */
/* 690 */ NdrFcShort( 0x8 ), /* 8 */
/* 692 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 694 */
0x15, /*
FC_STRUCT */
0x3, /*
3 */
/* 696 */ NdrFcShort( 0x10 ), /* 16 */
/* 698 */ 0x8, /* FC_LONG */
0x6, /*
FC_SHORT */
/* 700 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 702 */ 0x0, /* 0 */
NdrFcShort( 0xffff1 ),
/* Offset= -15 (688) */
0x5b, /*
FC_END */
/* 706 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 708 */ NdrFcShort( 0x20 ), /* 32 */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0xa ), /* Offset= 10 (722) */
/* 714 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 716 */ 0x36, /* FC_POINTER */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 718 */ 0x0, /* 0 */
NdrFcShort( 0xffe7 ),
/* Offset= -25 (694) */
0x5b, /*
FC_END */
/* 722 */
0x11, 0x0, /*
FC_RP */
/* 724 */ NdrFcShort( 0xff12 ), /* Offset= -
238 (486) */
/* 726 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 728 */ NdrFcShort( 0x1 ), /* 1 */
/* 730 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 732 */ NdrFcShort( 0x0 ), /* 0 */
/* 734 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 736 */ 0x1, /* FC_BYTE */

```

```

0x5b, /*
FC_END */
/* 738 */
FC_BOGUS_STRUCT */
0x1a, /*
0x3, /*
3 */
/* 740 */ NdrFcShort( 0x10 ), /* 16 */
/* 742 */ NdrFcShort( 0x0 ), /* 0 */
/* 744 */ NdrFcShort( 0x6 ), /* Offset= 6 (750) */
/* 746 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTUREPAD4 */
/* 748 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 750 */
0x12, 0x0, /*
FC_UP */
/* 752 */ NdrFcShort( 0xffe6 ), /* Offset= -
26 (726) */
/* 754 */
0x1b, /*
FC_CARRAY */
0x1, /*
1 */
/* 756 */ NdrFcShort( 0x2 ), /* 2 */
/* 758 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 760 */ NdrFcShort( 0x0 ), /* 0 */
/* 762 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 764 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 766 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 768 */ NdrFcShort( 0x10 ), /* 16 */
/* 770 */ NdrFcShort( 0x0 ), /* 0 */
/* 772 */ NdrFcShort( 0x6 ), /* Offset= 6 (778) */
/* 774 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTUREPAD4 */
/* 776 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 778 */
0x12, 0x0, /*
FC_UP */
/* 780 */ NdrFcShort( 0xffe6 ), /* Offset= -
26 (754) */
/* 782 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 784 */ NdrFcShort( 0x4 ), /* 4 */

```

```

/* 786 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 788 */ NdrFcShort( 0x0 ), /* 0 */
/* 790 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 792 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 794 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 796 */ NdrFcShort( 0x10 ), /* 16 */
/* 798 */ NdrFcShort( 0x0 ), /* 0 */
/* 800 */ NdrFcShort( 0x6 ), /* Offset= 6 (806) */
/* 802 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTUREPAD4 */
/* 804 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 806 */
0x12, 0x0, /*
FC_UP */
/* 808 */ NdrFcShort( 0xffe6 ), /* Offset= -
26 (782) */
/* 810 */
0x1b, /*
FC_CARRAY */
0x7, /*
7 */
/* 812 */ NdrFcShort( 0x8 ), /* 8 */
/* 814 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 816 */ NdrFcShort( 0x0 ), /* 0 */
/* 818 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 820 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 822 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 824 */ NdrFcShort( 0x10 ), /* 16 */
/* 826 */ NdrFcShort( 0x0 ), /* 0 */
/* 828 */ NdrFcShort( 0x6 ), /* Offset= 6 (834) */
/* 830 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTUREPAD4 */
/* 832 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 834 */
0x12, 0x0, /*
FC_UP */

```

```

/* 836 */ NdrFcShort( 0xffe6 ), /* Offset= -
26 (810) */
/* 838 */
0x15, /*
FC_STRUCTURE */
0x3, /*
3 */
/* 840 */ NdrFcShort( 0x8 ), /* 8 */
/* 842 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 844 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 846 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 848 */ NdrFcShort( 0x8 ), /* 8 */
/* 850 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 852 */ NdrFcShort( 0xffc8 ), /* -56 */
/* 854 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 856 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 858 */ NdrFcShort( 0xffec ), /* Offset= -
20 (838) */
/* 860 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 862 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 864 */ NdrFcShort( 0x38 ), /* 56 */
/* 866 */ NdrFcShort( 0xffec ), /* Offset= -
20 (846) */
/* 868 */ NdrFcShort( 0x0 ), /* Offset= 0 (868) */
/* 870 */ 0x6, /* FC_SHORT */
0x6, /*
FC_SHORT */
/* 872 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 874 */ 0x40, /* FC_STRUCTUREPAD4 */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 876 */ 0x0, /* 0 */
NdrFcShort( 0xfe0f ),
/* Offset= -497 (380) */
0x5b, /*
FC_END */
/* 880 */
0x12, 0x0, /*
FC_UP */

```

```

/* 882 */ NdrFcShort( 0xff04 ), /* Offset= -
252 (630) */
/* 884 */
FC_UP [simple_pointer] */
/* 886 */ 0x1, /* FC_BYTE */
FC_PAD */
/* 888 */
FC_UP [simple_pointer] */
/* 890 */ 0x6, /* FC_SHORT */
FC_PAD */
/* 892 */
FC_UP [simple_pointer] */
/* 894 */ 0x8, /* FC_LONG */
FC_PAD */
/* 896 */
FC_UP [simple_pointer] */
/* 898 */ 0xb, /* FC_HYPER */
FC_PAD */
/* 900 */
FC_UP [simple_pointer] */
/* 902 */ 0xa, /* FC_FLOAT */
FC_PAD */
/* 904 */
FC_UP [simple_pointer] */
/* 906 */ 0xc, /* FC_DOUBLE */
FC_PAD */
/* 908 */
FC_UP */
/* 910 */ NdrFcShort( 0xfda2 ), /* Offset= -
606 (304) */
/* 912 */
FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfda4 ), /* Offset= -
604 (310) */
/* 916 */
FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xfdba ), /* Offset= -
582 (336) */
/* 920 */
FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0xfdc8 ), /* Offset= -
568 (354) */
/* 924 */
FC_UP [pointer_deref] */
/* 926 */ NdrFcShort( 0xfdd6 ), /* Offset= -
554 (372) */

```

```

/* 928 */
FC_UP [pointer_deref] */
/* 930 */ NdrFcShort( 0x2 ), /* Offset= 2 (932) */
/* 932 */
FC_UP */
/* 934 */ NdrFcShort( 0x14 ), /* Offset= 20 (954) */
/* 936 */
FC_STRUCT */
7 */
/* 938 */ NdrFcShort( 0x10 ), /* 16 */
/* 940 */ 0x6, /* FC_SHORT */
FC_BYTE */
/* 942 */ 0x1, /* FC_BYTE */
FC_LONG */
/* 944 */ 0xb, /* FC_HYPER */
FC_END */
/* 946 */
FC_UP */
/* 948 */ NdrFcShort( 0xffff4 ), /* Offset= -
12 (936) */
/* 950 */
FC_UP [simple_pointer] */
/* 952 */ 0x2, /* FC_CHAR */
FC_PAD */
/* 954 */
FC_BOGUS_STRUCT */
7 */
/* 956 */ NdrFcShort( 0x20 ), /* 32 */
/* 958 */ NdrFcShort( 0x0 ), /* 0 */
/* 960 */ NdrFcShort( 0x0 ), /* Offset= 0 (960) */
/* 962 */ 0x8, /* FC_LONG */
FC_LONG */
/* 964 */ 0x6, /* FC_SHORT */
FC_SHORT */
/* 966 */ 0x6, /* FC_SHORT */
FC_SHORT */
/* 968 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0 */
/* 970 */ NdrFcShort( 0xfc3c ), /* Offset= -
964 (6) */
/* 972 */ 0x5c, /* FC_PAD */
FC_END */
/* 974 */ 0xb4, /* FC_USER_MARSHAL */
131 */

```

```

/* 976 */ NdrFcShort( 0x0 ), /* 0 */
/* 978 */ NdrFcShort( 0x18 ), /* 24 */
/* 980 */ NdrFcShort( 0x0 ), /* 0 */
/* 982 */ NdrFcShort( 0xfc2c ), /* Offset= -
980 (2) */
/* 984 */
FC_RP [allocated_on_stack] */
/* 986 */ NdrFcShort( 0x6 ), /* Offset= 6 (992) */
/* 988 */
FC_OP */
/* 990 */ NdrFcShort( 0xffdc ), /* Offset= -
36 (954) */
/* 992 */ 0xb4, /* FC_USER_MARSHAL */
131 */
/* 994 */ NdrFcShort( 0x0 ), /* 0 */
/* 996 */ NdrFcShort( 0x18 ), /* 24 */
/* 998 */ NdrFcShort( 0x0 ), /* 0 */
/* 1000 */ NdrFcShort( 0xffff4 ), /*
Offset= -12 (988) */
};
static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    VARIANT_UserSize
    ,VARIANT_UserMarshal
    ,VARIANT_UserUnmarshal
    ,VARIANT_UserFree
};
/* Standard interface: __MIDL_itf_tpc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */
/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xc0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */
/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0
x4F,0xBF,0xE0,0x8B}} */
#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =

```

```

{
0,
44,
88,
132,
176,
220
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
&Object_StubDesc,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
&Object_StubDesc,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0,
0};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
&ITPCC_ProxyInfo,
&IID_ITPCC,
IUnknown_QueryInterface_Proxy,
IUnknown_AddRef_Proxy,
IUnknown_Release_Proxy ,
(void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
(void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
(void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
(void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
(void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
(void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
&IID_ITPCC,
&ITPCC_ServerInfo,
9,
0, /* pure interpreted */
CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
0,
NdrOleAllocate,
NdrOleFree,
0,
0,
};

```

```

0,
0,
0,
__MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x50002, /* Ndr library version */
0,
0x6000169, /* MIDL Version 6.0.361 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* cs routines */
0, /* proxy/server info */
0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
(CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
0
};

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
(CInterfaceStubVtbl *) &_ITPCCStubVtbl,
0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
"ITPCC",
0
};

#define _tpcc_com_ps_CHECK_IID(n)
IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
if(!_tpcc_com_ps_CHECK_IID(0))
{
*pIndex = 0;
return 1;
}

return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
(PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
(PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,
};

```

```

(const PCInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
0, /* no delegation
& _tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uuid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0 /* Filler3 */
};
#if _MSC_VER >= 1200
#pragma warning(pop)
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/

tpcc_dblib.cpp
FILE: TPCC_DBLIB.CPP
Microsoft
TPC-C Kit Ver. 4.42.000
Copyright
Microsoft, 2002
All Rights Reserved
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
PURPOSE: Implements dblib calls for TPC-C
txns.
Contact: Charles Levine
(clevine@microsoft.com)
Change history:
4.42.000 - changed wid fields
from short to long to support >32K warehouses
4.20.000 - updated rev number to
match kit
4.10.001 - not deleting error
class in catch handler on deadlock retry;
not a
functional bug, but a memory leak
- had to
tweak some declarations to compile with latest SDK;
no functional change
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqlldb.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

```

```

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE
4096

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 10;
// how many retries on deadlock
static long iConnectionCount = 0; // number
of current dblib connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit(); //
            initialize dblib
            break;

        case DLL_PROCESS_DETACH: //
            dbexit();
            close all dblib structures/connections
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDblibError( severity,
dberr, oserr, dberrstr, oserrstr );
    }
}

```

```

        return INT_CANCEL;
    }

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT
msgno, int msgstate, int severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library
SQL Server error messages
*
* ARGUMENTS: DBPROCESS *dbproc
DBPROCESS id pointer
DBINT
msgno
message number
int
msgstate
message state
int
severity
message severity
char
*msgtext
printable
message description
*
* RETURNS: int
INT_CONTINUE continue if
error is SQLETIME else INT_CANCEL action
*
INT_CANCEL
cancel operation
*
* COMMENTS: This function also sets the dead
lock dbproc variable if necessary.
*
*/

// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS,
DBINT, INT, INT, LPCSTR, LPCSTR, LPCSTR,
DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity,
LPCSTR
msgtext, LPCSTR srvername, LPCSTR procname, DBUSMALLINT
line)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno,
msgstate, severity, msgtext );
    }

    return 0;
}

```

```

/* FUNCTION: void UtilStrCpy(char * pDest, char *
pSrc, int n)
*
* PURPOSE: This function copies n characters
from string pSrc to pDest and places a
* null character at the
end of the destination string.
*
* ARGUMENTS: char
*pDest destination string pointer
char
*pSrc source string pointer
int
n
number of characters to copy
*
* RETURNS: None
*
* COMMENTS: Unlike strncpy this function
ensures that the result string is
always null
terminated.
*
*/

inline static void UtilStrCpy(char * pDest, const
BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*
*/

char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
"No orders found for customer." },
        { ERR_RETRIED_TRANS,
"Retries before transaction succeeded." },
        { 0, "" }
    };
}
};

```

```

        static char szNotFound[] = "Unknown error
number.";

        for(i=0; errorMsgs[i].szMsg[0]; i++)
        {
            if ( m_errno ==
errorMsgs[i].iError )
                break;
        }
        if ( !errorMsgs[i].szMsg[0] )
            return szNotFound;
        else
            return errorMsgs[i].szMsg;
    }

    // wrapper routine for class constructor
    __declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
        LPCSTR szServer,          // name of
SQL server
        LPCSTR szUser,           //
user name for login
        LPCSTR szPassword,       // password
for login
        LPCSTR szHost,          //
workstation name: shows up in sp_who: max 30 chars,
only first 10 kept by SQL Server
        LPCSTR szDatabase )     // name of
database to use
    {
        return new CTPCC_DBLIB( szServer, szUser,
szPassword, szHost, szDatabase );
    }

    CTPCC_DBLIB::CTPCC_DBLIB (
        LPCSTR szServer,        // name of
SQL server
        LPCSTR szUser,          //
user name for login
        LPCSTR szPassword,      // password
for login
        LPCSTR szHost,         //
workstation name: shows up in sp_who: max 30 chars,
only first 10 kept by SQL Server
        LPCSTR szDatabase )     // name of
database to use
    {
        LOGINREC *login;
        const BYTE *pData;

        // initialization
        m_dbproc = NULL;
        m_DbLibErr = (CDBLIBERR*)NULL;
        m_SqlErr = (CSQLERR*)NULL;

        m_MaxRetries = 10;      // how many
retries on deadlock

        // increase max number of connections if
getting close
        if ( dbgetmaxprocs() < (iConnectionCount+5)
)
            {

```

```

                if (
dbsetmaxprocs(iConnectionCount+10) == FAIL )
                    ThrowError(CDBLIBERR::eDbSetMaxProcs);
            }

            // allocate a login structure
            login = dblogin();
            if (login == NULL)
                ThrowError(CDBLIBERR::eLogin);
            InterlockedIncrement( &iConnectionCount );

            // register error and message handler
            if (dbprocerrhandle(login, err_handler) ==
NULL)
                ThrowError(CDBLIBERR::eDbProcHandler);

            if (dbprocmsghandle(login, msg_handler) ==
NULL)
                ThrowError(CDBLIBERR::eDbProcHandler);

            DBSETLUSER(login, szUser);
            DBSETLPWD(login, szPassword);
            DBSETHOST(login, szHost);
            DBSETLPACKET(login, (unsigned
short)DEFCLPACKSIZE);
            DBSETLVERSION(login, DBVER60);
            // use dblib ver 6.0 client behavior

            // set time to wait for login
            if (dbsetlogintime(60) == FAIL)
                ThrowError(CDBLIBERR::eDbSet);

            // set time to wait for statement execution
            if (dbsettime(180) == FAIL)
                ThrowError(CDBLIBERR::eDbSet);

            m_dbproc = dbopen(login, szServer);

            // deallocate login structure before
checking for success
            dbfreelogin( login );

            if (m_dbproc == NULL)
                ThrowError(CDBLIBERR::eDbOpen);

            // save address of class instance so that
the message and error handler
            // can get to data.
            dbsetuserdata(m_dbproc, (LPVOID)this);

            // Use the the right database
            if (dbuse(m_dbproc, szDatabase) == FAIL)
                ThrowError(CDBLIBERR::eDbUse);

            dbcmd(m_dbproc, "set nocount on ");
            // do not return row counts
            dbcmd(m_dbproc, "set XACT_ABORT ON");
            // rollback transaction on abort

```

```

            if (dbsqlxexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbSqlExec);
            DiscardNextResults(2);

            // verify that version of stored procs on
server is correct
            dbrpcinit(m_dbproc, "tpcc_version", 0);
            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            char szSrvVersion[16];
            pData=dbdata(m_dbproc, 1);
            if (pData)
                UtilStrCpy(szSrvVersion, pData,
dbdatalen(m_dbproc, 1));
            else
                szSrvVersion[0]=0;
            if (strcmp(szSrvVersion,sVersion))
                throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

            DiscardNextRows(0);
            DiscardNextResults(0);
        }

        CTPCC_DBLIB::~CTPCC_DBLIB( void )
        {
            // close db connection and deallocate
resources
            dbclose(m_dbproc);
            InterlockedDecrement( &iConnectionCount );
            if (m_DbLibErr != NULL)
                delete m_DbLibErr;
            if (m_SqlErr != NULL)
                delete m_SqlErr;
        }

        void CTPCC_DBLIB::SetDbLibError(int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
        {
            delete m_DbLibErr;
            m_DbLibErr = new
CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

            if (dberrstr != NULL)
                {

```

```

        m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
        strcpy( m_DbLibErr->m_dberrstr,
dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
        strcpy( m_DbLibErr->m_oserrstr,
oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno,
int msgstate, int severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLErr();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[
strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext,
msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION
eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if
yes, throw it and ignore any DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLErr *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our
pointer to instance; catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to
happen, since it means that an error was returned
        // but the error handlers were
not called.
        pDbLibErr = new
CDBLIBERR(eAction);
    else

```

```

    {
        pDbLibErr = m_DbLibErr;
        pDbLibErr->m_eAction = eAction;
        m_DbLibErr = NULL; //
clear our pointer to instance; catch handler will
delete
    }

    throw pDbLibErr;
}

// Read and discard rows until no more. Throw an
exception if number of rows read doesn't
// match number of rows expected. The row count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int iRowsRead = 0;
    RETCODE rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }

    if ((iExpectedCount >= 0) &&
(iExpectedCount != iRowsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

// Read and discard results until no more. Throw an
exception if number of result sets read doesn't
// match number expected. The result set count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int
iExpectedCount)
{
    int iResultsRead = 0;
    RETCODE rc;

    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)

```

```

            break;
            if (rc == FAIL)
            {
                if (iExpectedCount >=
0)
                    ThrowError(CDBLIBERR::eDbResults);
                else
                    break;
            }

            DiscardNextRows(-1);
            iResultsRead++;
        }

        if ((iExpectedCount >= 0) &&
(iExpectedCount != iResultsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

void CTPCC_DBLIB::StockLevel()
{
    int iTryCount =
0;
    const BYTE *pData;
    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_stocklevel", 0);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.StockLevel.w_id); // @w_id int
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.StockLevel.d_id); // @d_id
            tinyint
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.StockLevel.threshold); // @threshold
            smallint

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

```

```

        if
(pData=dbdata(m_dbproc, 1))
        m_txn.StockLevel.low_stock = *((long *)
pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.StockLevel.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
        (e->m_msgno
        == iErrOleDbProvider &&
        >m_msgtext, sErrTimeoutExpired) != NULL) &&
        (++iTryCount
        <= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)
    //if (iTryCount)
    //    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                i;
    DBINT              commit_flag;
    DBDATETIME         datetime;
    DBDATERECD         daterec;

    int                iTryCount =
0;
    const BYTE         *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_neworder", 0);

```

```

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_ol_cnt);

            // check whether any
            order lines are for a remote warehouse

            m_txn.NewOrder.o_all_local = 1;
            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {
                if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o_all_local = 0; // at
                    least one remote warehouse

                    break;
                }
            }
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_all_local);

            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
            }

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            results

            // Get order line

            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)
            {

```

```

            if
(dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if
(dbnumcols(m_dbproc) != 5)
                ThrowError(CDBLIBERR::eWrongNumCols);

            if
(dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if(pData=dbdata(m_dbproc, 1))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name,
pData, dbdatlen(m_dbproc, 1));
            if(pData=dbdata(m_dbproc, 2))
                m_txn.NewOrder.OL[i].ol_stock =
                (*(DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc, 3))
                UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_ge
neric, pData, dbdatlen(m_dbproc, 3));
            if(pData=dbdata(m_dbproc, 4))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc, 4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);
            if(pData=dbdata(m_dbproc, 5))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPBYTE)pData, dbdatlen(m_dbproc, 5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

            m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount +
m_txn.NewOrder.OL[i].ol_amount;

            DiscardNextRows(0);
        }

        // get remaining values
        for w_tax, d_tax, o_id, c_last, c_discount, c_credit,
o_entry_d, commit_flag

```



```

        if (dbresults(m_dbproc)
!= SUCCEEDED)
        ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)
        ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 8)
        ThrowError(CDBLIBERR::eWrongNumCols);

        if
(pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);

        if
(pData=dbdata(m_dbproc, 2))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);

        if
(pData=dbdata(m_dbproc, 3))

        m_txn.NewOrder.o_id = *(DBINT *) pData;
        if
(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))
        {
                datetime =
*((DBDATETIME *) pData);

                dbdatecrack(m_dbproc, &daterec, &datetime);

                m_txn.NewOrder.o_entry_d.year =
daterec.year;

```

```

        m_txn.NewOrder.o_entry_d.month =
daterec.month;
        m_txn.NewOrder.o_entry_d.day =
daterec.day;
        m_txn.NewOrder.o_entry_d.hour =
daterec.hour;
        m_txn.NewOrder.o_entry_d.minute =
daterec.minute;
        m_txn.NewOrder.o_entry_d.second =
daterec.second;
        }
        if
(pData=dbdata(m_dbproc, 8))

        commit_flag =
(*(DBTINYINT *) pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (commit_flag == 1)
        {
                m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

                m_txn.NewOrder.exec_status_code = eOK;
        }
        else
        {
                m_txn.NewOrder.exec_status_code =
eInvalidItem;

                return;
        }
        catch (CSQLERR *e)
        {
                if ((e->m_msgno == 1205

                (e->m_msgno
== iErrOleDbProvider &&
strstr(e-
>m_msgtext, sErrTimeoutExpired) != NULL)) &&
(++iTryCount
<= iMaxRetries))
        {
                // hit
                deadlock; backoff for increasingly longer period
                delete e;
                Sleep(10 *
iTryCount);
        }
        else
        {
                throw;
        }
        }
        // while (TRUE)
}

```

```

//        if (iTryCount)
//                throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
        DBDATETIME          datetime;
        DBDATERECD          daterec;

        int                  iTryCount =
0;
        const BYTE          *pData;

        ResetError();

        while (TRUE)
        {
                try
                {
                        dbrpcinit(m_dbproc,
"tpcc_payment", 0);

                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.w_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_w_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLFLT8, -1, -1, (BYTE *)
&m_txn.Payment.h_amount);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.d_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.c_d_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_id);

                        // if customer id is
                        zero, then payment is by name
                        if (m_txn.Payment.c_id
== 0)

                        dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char
*)&m_txn.Payment.c_last);

                        if (dbrpcexec(m_dbproc)
== FAIL)

                        ThrowError(CDBLIBERR::eDbRpcExec);

                        if (dbresults(m_dbproc)
!= SUCCEEDED)

                        ThrowError(CDBLIBERR::eDbResults);

```

```

        if (dbnextrow(m_dbproc)
:= REG_ROW)
        ThrowError(CDBLIBERR::eDbNextRow);
        if (dbnumcols(m_dbproc)
:= 27)
        ThrowError(CDBLIBERR::eWrongNumCols);
        if
(pData=dbdata(m_dbproc, 1))
        m_txn.Payment.c_id = *((DBINT *) pData);
(pData=dbdata(m_dbproc, 2))
        UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));
        if
(pData=dbdata(m_dbproc, 3))
        {
                datetime =
*((DBDATETIME *) pData);
                dbdatecrack(m_dbproc, &daterec, &datetime);
                m_txn.Payment.h_date.year = daterec.year;
                m_txn.Payment.h_date.month =
daterec.month;
                m_txn.Payment.h_date.day = daterec.day;
                m_txn.Payment.h_date.hour = daterec.hour;
                m_txn.Payment.h_date.minute =
daterec.minute;
                m_txn.Payment.h_date.second =
daterec.second;
        }
        if
(pData=dbdata(m_dbproc, 4))
        UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))
        UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
        if
(pData=dbdata(m_dbproc, 6))
        UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))
        UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));

```

```

        if
(pData=dbdata(m_dbproc, 8))
        UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
        if
(pData=dbdata(m_dbproc, 9))
        UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
        if
(pData=dbdata(m_dbproc, 10))
        UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
        if
(pData=dbdata(m_dbproc, 11))
        UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
        if
(pData=dbdata(m_dbproc, 12))
        UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
        if
(pData=dbdata(m_dbproc, 13))
        UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
        if
(pData=dbdata(m_dbproc, 14))
        UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));
        if
(pData=dbdata(m_dbproc, 15))
        UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
        if
(pData=dbdata(m_dbproc, 16))
        UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
        if
(pData=dbdata(m_dbproc, 17))
        UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
        if
(pData=dbdata(m_dbproc, 18))
        UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
        if
(pData=dbdata(m_dbproc, 19))
        UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
        if
(pData=dbdata(m_dbproc, 20))

```

```

        UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
        if
(pData=dbdata(m_dbproc, 21))
        UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
        if
(pData=dbdata(m_dbproc, 22))
        {
                datetime =
*((DBDATETIME *) pData);
                dbdatecrack(m_dbproc, &daterec, &datetime);
                m_txn.Payment.c_since.year =
daterec.year;
                m_txn.Payment.c_since.month =
daterec.month;
                m_txn.Payment.c_since.day = daterec.day;
                m_txn.Payment.c_since.hour =
daterec.hour;
                m_txn.Payment.c_since.minute =
daterec.minute;
                m_txn.Payment.c_since.second =
daterec.second;
        }
        if(pData=dbdata(m_dbproc, 23))
        UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
        if(pData=dbdata(m_dbproc, 24))
        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,24), SQLFLT8, (BYTE
*)&m_txn.Payment.c_credit_lim, 8);
        if(pData=dbdata(m_dbproc, 25))
        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,25), SQLFLT8, (BYTE
*)&m_txn.Payment.c_discount, 8);
        if(pData=dbdata(m_dbproc, 26))
        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,26), SQLFLT8, (BYTE
*)&m_txn.Payment.c_balance, 8);
        if(pData=dbdata(m_dbproc, 27))
        UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));
        DiscardNextRows(0);

```

```

DiscardNextResults(0);
    if (m_txn.Payment.c_id
== 0)
        throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
    else
        m_txn.Payment.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
== iErrOleDbProvider &&
>m_msgtext, sErrTimeoutExpired) != NULL) &&
        {
            if ((e->m_msgno
== iMaxRetries))
            {
                // hit
                deadlock; backoff for increasingly longer period
                delete e;
                Sleep(10 *
iTryCount);
            }
            else
                throw;
        }
        // while (TRUE)
    }
    if (iTryCount)
        throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int
    DBDATETIME      datetime;
    DBDATERECD      daterec;

    int
    iTryCount =

0;
    RETCODE
    const BYTE
    *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_orderstatus", 0);

```

```

        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.w_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.OrderStatus.d_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.c_id);

        // if customer id is
        zero, then order status is by name
        if
        (m_txn.OrderStatus.c_id == 0)
            dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);

        if (dbrpcexec(m_dbproc)
== FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        // Get order lines
        if (dbresults(m_dbproc)
!= SUCCEED)
        {
            if
            ((m_DbLibErr == NULL) && (m_SqlErr == NULL))
                throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
            else
                ThrowError(CDBLIBERR::eDbResults);
        }

        if (dbnumcols(m_dbproc)
!= 5)
            ThrowError(CDBLIBERR::eWrongNumCols);

        i = 0;
        while (TRUE)
        {
            rc =
            dbnextrow(m_dbproc);
            if (rc ==
            NO_MORE_ROWS)
                break;
            if (rc !=
            REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if(pData=dbdata(m_dbproc, 1))
                m_txn.OrderStatus.OL[i].ol_supply_w_id =
                (*(DBSMALLINT *) pData);

```

```

            if(pData=dbdata(m_dbproc, 2))
                m_txn.OrderStatus.OL[i].ol_i_id = (*(DBINT
*) pData);
            if(pData=dbdata(m_dbproc, 3))
                m_txn.OrderStatus.OL[i].ol_quantity =
                (*(DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc, 4))
                dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,4),
                SQLFLT8, (BYTE
*)&m_txn.OrderStatus.OL[i].ol_amount, 8);
            if(pData=dbdata(m_dbproc, 5))
            {
                datetime = (*(DBDATETIME *) pData);
                dbdatecrack(m_dbproc, &daterec, &datetime);
                m_txn.OrderStatus.OL[i].ol_delivery_d.year
                = daterec.year;
                m_txn.OrderStatus.OL[i].ol_delivery_d.month
                = daterec.month;
                m_txn.OrderStatus.OL[i].ol_delivery_d.day
                = daterec.day;
                m_txn.OrderStatus.OL[i].ol_delivery_d.hour
                = daterec.hour;
                m_txn.OrderStatus.OL[i].ol_delivery_d.minut
                e = daterec.minute;
                m_txn.OrderStatus.OL[i].ol_delivery_d.secon
                d = daterec.second;
            }
            i++;
            m_txn.OrderStatus.o_ol_cnt = i;

            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc)
!= 8)

```

```

ThrowError(CDBLIBERR::eWrongNumCols);

if(pData=dbdata(m_dbproc, 1))
    m_txn.OrderStatus.c_id = (*(DBINT *)
pData);

if(pData=dbdata(m_dbproc, 2))
    UtilStrCpy(m_txn.OrderStatus.c_last, pData,
dbdatlen(m_dbproc,2));

if(pData=dbdata(m_dbproc, 3))
    UtilStrCpy(m_txn.OrderStatus.c_first,
pData, dbdatlen(m_dbproc,3));

if(pData=dbdata(m_dbproc, 4))
    UtilStrCpy(m_txn.OrderStatus.c_middle,
pData, dbdatlen(m_dbproc, 4));

if(pData=dbdata(m_dbproc, 5))
    {
        datetime =
*((DBDATETIME *) pData);
        dbdatecrack(m_dbproc, &daterec, &datetime);
        m_txn.OrderStatus.o_entry_d.year =
daterec.year;
        m_txn.OrderStatus.o_entry_d.month =
daterec.month;
        m_txn.OrderStatus.o_entry_d.day =
daterec.day;
        m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;
        m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;
        m_txn.OrderStatus.o_entry_d.second =
daterec.second;
    }

if(pData=dbdata(m_dbproc, 6))
    m_txn.OrderStatus.o_carrier_id =
(*(DBSMALLINT *) pData);

if(pData=dbdata(m_dbproc, 7))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPCTSTR)pData, dbdatlen(m_dbproc,7),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.c_balance, 8);

```

```

if(pData=dbdata(m_dbproc, 8))
    m_txn.OrderStatus.o_id = (*(DBINT *)
pData);

DiscardNextRows(0);
DiscardNextResults(0);

if
(m_txn.OrderStatus.o_ol_cnt == 0)
    throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER
);
else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST
);
else
    m_txn.OrderStatus.exec_status_code = eOK;

return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
||
== iErrOleDbProvider &&
(e->m_msgno
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
    {
        // hit
        deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
} // while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int i;
    int iTryCount =
0;
    const BYTE *pData;

    ResetError();

```

```

while (TRUE)
{
    try
    {
        dbrpcinit(m_dbproc,
"tpcc_delivery", 0);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.o_carrier_id);

        if (dbrpcexec(m_dbproc)
== FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc)
!= SUCCEEDED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 10)
            ThrowError(CDBLIBERR::eWrongNumCols);

        for (i=0; i<10; i++)
        {
            if (pData =
dbdata(m_dbproc, i+1))
                m_txn.Delivery.o_id[i] = (*(DBINT *)pData);
        }

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.Delivery.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
||
== iErrOleDbProvider &&
(e->m_msgno
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
        {
            // hit
            deadlock; backoff for increasingly longer period

```

```

        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)
//
// if (iTryCount)
//     throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }

    return;
}

```

## ***tpcc\_odbc.cpp***

```

/*
 * FILE: TPCC_ODBC.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.42.000
 * Copyright
 * Microsoft, 2002
 * All Rights Reserved
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 *
 * PURPOSE: Implements ODBC calls for TPC-C
 * txns.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.42.000 - changed w_id fields
 * from short to long to support >32K warehouses
 * 4.20.000 - updated rev number to
 * match kit
 * 4.10.001 - not deleting error
 * class in catch handler on deadlock retry;
 * not a
 * functional bug, but a memory leak
 */

#include <windows.h>
#include <stdio.h>

```

```

#include <assert.h>

#define DBNTWIN32
#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

// #define COMPILER_FOR_SNAC // define that to
// compile for SQL Native Client; comment out to use
// MDAC

#ifdef COMPILER_FOR_SNAC
#include <odbcss.h>
#else
// Compile for SNAC
#include <sqlncli.h>
#endif

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from
// tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 3; // how many
retries on deadlock
//const iMaxRetries = 0; // for
debugging

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV;
// ODBC environment handle

BOOL WINAPIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv) != SQL_SUCCESS )
                return FALSE;
            break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)
                SQLFreeEnv(henv);
    }
}

```

```

        break;
        default:
            /* nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
 *
 */

char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
"No orders found for customer." },
        { ERR_RETRIED_TRANS,
"Retries before transaction succeeded." },
        { ERR_INVALID_NEW_ORDER_PARAM,
"New Order parameter invalid." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, //
user name for login
LPCSTR szPassword, // password
for login

```

```

        LPCSTR szHost,                //
not used
        LPCSTR szDatabase,           // name of
database to use
        LPCWSTR szSPPrefix,         // prefix to
append to the stored procedure names
        BOOL bCallNoDuplicatesNewOrder ) // whether
to check for non-duplicate items in NewOrder and call
a new SP
{
    return new CTPCC_ODBC( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix,
bCallNoDuplicatesNewOrder );
}

CTPCC_ODBC::CTPCC_ODBC (
    LPCSTR szServer,
    // name of SQL server
    LPCSTR szUser,
    // user name for login
    LPCSTR szPassword,
    // password for login
    LPCSTR szHost,
    // not used
    LPCSTR szDatabase,
    // name of database to use
    LPCWSTR szSPPrefix,
    // prefix to append to the stored procedure
names
    BOOL bCallNoDuplicatesNewOrder //
whether to check for non-duplicate items in NewOrder
and call a new SP
)
:
m_bCallNoDuplicatesNewOrder(bCallNoDuplicatesNewOrder)
{
    RETCODE rc;

    // initialization
    m_hdbc = SQL_NULL_HDBC;
    m_hstmt = SQL_NULL_HSTMT;

    m_hstmtNewOrder = SQL_NULL_HSTMT;
    m_hstmtPayment = SQL_NULL_HSTMT;
    m_hstmtDelivery = SQL_NULL_HSTMT;
    m_hstmtOrderStatus = SQL_NULL_HSTMT;
    m_hstmtStockLevel = SQL_NULL_HSTMT;

    m_descNewOrderCols1 = SQL_NULL_HDESC;
    m_descNewOrderCols2 = SQL_NULL_HDESC;
    m_descOrderStatusCols1 = SQL_NULL_HDESC;
    m_descOrderStatusCols2 = SQL_NULL_HDESC;

    wcsncpy(m_szSPPrefix, szSPPrefix,
sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));

    if ( SQLAllocHandle(SQL_HANDLE_DBC, henv,
&m_hdbc) != SQL_SUCCESS )

        ThrowError(CODBCERR::eAllocHandle);
}

```

```

        if ( SQLSetConnectOption(m_hdbc,
SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )

            ThrowError(CODBCERR::eConnOption);

        {
            char
szConnectStr[256];
            char
szOutStr[1024];
            SQLSMALLINT
iOutStrLen;

#ifdef COMPILER_FOR_SNAC
            sprintf( szConnectStr,
"DRIVER=SQL
Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );
#else
            // Compile for SNAC
            sprintf( szConnectStr,
"DRIVER=SQL Native
Client;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );
#endif
            rc = SQLDriverConnect(m_hdbc,
NULL, (SQLCHAR*)szConnectStr, sizeof(szConnectStr),
(SQLCHAR*)szOutStr,
sizeof(szOutStr), &iOutStrLen, SQL_DRIVER_NOPROMPT);

            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eConnect);
        }

        if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmt) != SQL_SUCCESS)

            ThrowError(CODBCERR::eAllocHandle);

        {
            char buffer[128];

            // set some options affecting
connection behavior
            strcpy(buffer, "set nocount on
set XACT_ABORT ON");
            rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            // verify that version of stored
procs on server is correct
            char db_sp_version[10];
            strcpy(buffer, "{call
tpcc_version}");
}

```

```

            rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);
            if ( SQLBindCol(m_hstmt, 1,
SQL_C_CHAR, &db_sp_version, sizeof(db_sp_version),
NULL) != SQL_SUCCESS )

                ThrowError(CODBCERR::eBindCol);
            if ( SQLFetch(m_hstmt) ==
SQL_ERROR )

                ThrowError(CODBCERR::eFetch);
            if
(strcmp(db_sp_version,sVersion))
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION
);

            SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmt);
        }

        // Bind parameters for each of the
transactions
        InitNewOrderParams();
        InitPaymentParams();
        InitOrderStatusParams();
        InitDeliveryParams();
        InitStockLevelParams();
    }

CTPCC_ODBC::~CTPCC_ODBC( void )
{
    // note: descriptors are automatically
released when the connection is dropped
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtNewOrder);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtPayment);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtDelivery);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtOrderStatus);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtStockLevel);

    SQLDisconnect(m_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);
}

//void CTPCC_ODBC::ThrowError( CODBCERR::ACTION
eAction )
void CTPCC_ODBC::ThrowError( RETCODE eAction )
{
    RETCODE rc;
    SDWORD lNativeError;
    char szState[6];
    char
szMsg[SQL_MAX_MESSAGE_LENGTH];
}

```

```

char
szTmp[6*SQL_MAX_MESSAGE_LENGTH];
CODBCERR *pODBCERR;
// not allocated until needed (maybe never)

pODBCERR = new CODBCERR();

pODBCERR->m_NativeError = 0;
//pODBCERR->m_eAction = eAction;
pODBCERR->m_eAction =
(CODBCERR::ACTION)eAction;
pODBCERR->m_bDeadLock = FALSE;

szTmp[0] = 0;
szMsg[0] = 0;
while (TRUE)
{
    rc = SQLError(henv, m_hdbc,
m_hstmt, (BYTE *)&szState, &lNativeError,
(BYTE *)&szMsg, sizeof(szMsg), NULL);
    if (rc == SQL_NO_DATA)
    {
        break;
    }
    if (rc != SQL_SUCCESS)
    {
        break;
    }
    // check for deadlock
    if (lNativeError == 1205 ||
(lNativeError == iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)
    pODBCERR->m_bDeadLock =
TRUE;

    // capture the (first) database
error
    if (pODBCERR->m_NativeError == 0
&& lNativeError != 0)
        pODBCERR->m_NativeError
= lNativeError;

    // quit if there isn't enough
room to concatenate error text
    if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
        break;

    // include line break after first
error msg
    if (szTmp[0] != 0)
        strcat( szTmp, "\n");
        strcat( szTmp, szMsg );
}

if (pODBCERR->m_odbcerrstr != NULL)
{
    delete [] pODBCERR->m_odbcerrstr;
    pODBCERR->m_odbcerrstr = NULL;
}

```

```

}
if (strlen(szTmp) > 0)
{
    pODBCERR->m_odbcerrstr = new
char[ strlen(szTmp)+1 ];
    strcpy( pODBCERR->m_odbcerrstr,
szTmp );
}

SQLFreeStmt(m_hstmt, SQL_CLOSE);
throw pODBCERR;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindCol);

    //Compose Stock Level statement
    _snwprintf(m_szStockLevelCommand,
sizeof(m_szStockLevelCommand)/sizeof(m_szStockLevelCo
mmand[0]),
        L" {call %stpcp_stocklevel
(?,?,?)", m_szSPPrefix);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE rc;
    int iTryCount =
0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {

```

```

rc =
SQLExecDirectW(m_hstmt, m_szStockLevelCommand,
SQL_NTS);
        if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eExecDirect);

        if ( SQLFetch(m_hstmt)
== SQL_ERROR )
            ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

        m_txn.StockLevel.exec_status_code = eOK;
        break;
    }
    catch (CODBCERR *e)
    {
        if (!e->m_bDeadLock)
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtNewOrder) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtNewOrderNoDuplicates) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols1) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols2) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderNoDuplicatesCols1) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderNoDuplicatesCols2) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;
}

```

```

        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS;
j++)
        {
            if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);
        }

        // set the bind offset pointer
        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_bindOffset,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the
second result set
        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        //Compose the New Order statement
        _snprintf(m_szNewOrderCommand,
sizeof(m_szNewOrderCommand)/sizeof(m_szNewOrderComman
d[0]),
                // 0      1      2
                //
012345678901234567890123456789
                L"call
%stppcc_neworder(?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?,
?, ?, ?, ?, ?, ?"
                L"?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?,
?, ?, ?, ?)", m_szSPPrefix);

```

```

        m_iBeginNewOrderVariablePart = 29 +
wcslen(m_szSPPrefix); // fixed part + prefix
part

        ////////////////////////////////////////////////////
        //
        // Now initialize New Order that
works on no duplicate (w_id,i_id) pairs
        // and returns one result set for
lineitem details.
        //
        //
        m_hstmt = m_hstmtNewOrderNoDuplicates;

        if ( SQLSetStmAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmAttr);

        i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS;
j++)
        {
            if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);
        }

```



```

        // set row-wise binding
        if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.NewOrder.OL[0]),
SQL_IS_UIINTEGER) != SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the
second result set
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=
SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        //Compose the New Order statement
        _snwprintf(m_szNewOrderNoDuplicatesCommand,
sizeof(m_szNewOrderNoDuplicatesCommand)/sizeof(m_szNe
wOrderNoDuplicatesCommand[0]),
        L"{call
%stpcc_neworder_new(?,?,?,?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,?),"
        L"?,?,?,?,?,?,?,?,?,?,?,?,?,?
,?,?,?,?,?}"", m_szSPPrefix);

        m_iBeginNewOrderNoDuplicatesVariablePart =
33 + wcslen(m_szSPPrefix); // fixed part + prefix
part
    }

    //
    // Returns true if there are duplicate
(warehouse_id, item_id)
    //
    // lineitem pairs in New Order input
parameters.
    //
    bool CTPCC_ODBC::DuplicatesInNewOrder()
    {
        int i, j;

        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
++i)
        {
            for (j = i+1; j<
m_txn.NewOrder.o_ol_cnt; ++j)
            {
                if
(m_txn.NewOrder.OL[i].ol_i_id ==
m_txn.NewOrder.OL[j].ol_i_id)
                    return true;
            }
        }

        return false;
    }

    void CTPCC_ODBC::NewOrder()
    {
        if (m_bCallNoDuplicatesNewOrder)
        {
            if (DuplicatesInNewOrder())
            {
                NewOrderDuplicates();
            }
            else
            {
                NewOrderNoDuplicates();
            }
        }
    }

```

```

        else
        {
            NewOrderDuplicates();
        }
    }

    void CTPCC_ODBC::NewOrderDuplicates()
    {
        int
        i;
        RETCODE
        int
        iTryCount = 0;
        rc;

        0 1 2

        012345678901234567890123456789
        wchar_t
        szSqlTemplate[IMAX_SP_NAME_LEN];

        tpcc_neworder(?,?,?,?,," // L"{call
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?," //
        m_hstmt = m_hstmtNewOrder;

        // associate the parameter and column
bindings for this transaction
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        // clip statement buffer based on number of
parameters
        // fixed part is 29 chars and variable part
is 6 chars per line item
        wcsncpy(szSqlTemplate, m_szNewOrderCommand);
        i = m_iBeginNewOrderVariablePart +
m_txn.NewOrder.o_ol_cnt*6;
        wcsncpy( &szSqlTemplate[i], L")" );

        // check whether any order lines are for a
remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
        {
            if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {

```

```

        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
        break;
    }
}
while (TRUE)
{
    try
    {
        m_BindOffset = 0;
        rc =
SQLExecDirectW(m_hstmt, szSqlTemplate, SQL_NTS);
        if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eExecDirect);

        // Get order line
results
        m_txn.NewOrder.total_amount = 0;
        for (i = 0;
i < m_txn.NewOrder.o_ol_cnt; i++)
        {
            // set the
bind offset value...
            m_BindOffset
= i * sizeof(m_txn.NewOrder.OL[0]);

            if (
SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            // move to
the next resultset
            if (
SQLMoreResults(m_hstmt) == SQL_ERROR )
                ThrowError(CODBCERR::eMoreResults);

            m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
        }

        // associate the column
bindings for the second result set
        if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        if ( SQLFetch(m_hstmt)
== SQL_ERROR)
            ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

```

```

        if (m_no_commit_flag ==
1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
eInvalidItem;

        break;
    }
    catch (CODBCERR *e)
    {
        if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

//
// No lineitem duplicates optimized version.
//
void CTPCC_ODBC::NewOrderNoDuplicates()
{
    int
i;
    RETCODE rc;
    int
iTryCount = 0;

    0 1 2 3 //
//
0123456789012345678901234567890123
wchar_t
szSqlTemplate[IMAX_SP_NAME_LEN];

tpcc_neworder_new(?,?,?,?," //
L"?,?,?,?,?,?,?,?,?,?,?,?,?," //

```

```

L"?,?,?,?,?,?,?,?,?,?,?,?,?," //
//
L"?,?,?,?,?,?,?,?,?,?,?,?,?," //
m_hstmt = m_hstmtNewOrderNoDuplicates;

// associate the parameter and column
bindings for this transaction
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        // clip statement buffer based on number of
parameters
        // fixed part is 33 chars and variable part
is 6 chars per line item
        wcsncpy(szSqlTemplate,
m_szNewOrderNoDuplicatesCommand);
        i =
m_iBeginNewOrderNoDuplicatesVariablePart +
m_txn.NewOrder.o_ol_cnt*6;
        wcsncpy( &szSqlTemplate[i], L"");

        // check whether any order lines are for a
remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
        {
            if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {
                m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                break;
            }
        }

        while (TRUE)
        {
            try
            {
                // configure block
cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

                rc =
SQLExecDirectW(m_hstmt, szSqlTemplate, SQL_NTS);
                if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

```

```

        ThrowError(CODBCERR::eExecDirect);

        // configure block
        cursor
            if
                (SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
                (SQLPOINTER)MAX_OL_NEW_ORDER_ITEMS, 0) !=
                SQL_SUCCESS)
                    ThrowError(CODBCERR::eSetStmtAttr);

            // Get order line
            results
                if ( SQLFetch(m_hstmt)
                == SQL_ERROR)
                    ThrowError(CODBCERR::eFetch);

            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
            i < m_txn.NewOrder.o_ol_cnt; i++)
                {
                    m_txn.NewOrder.total_amount +=
                    m_txn.NewOrder.OL[i].ol_amount;
                }

            // associate the column
            bindings for the second result set
                if ( SQLSetStmtAttrW(
                m_hstmt, SQL_ATTR_APP_ROW_DESC,
                m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=
                SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

            // move to the next
            resultset
                if (
                SQLMoreResults(m_hstmt) == SQL_ERROR )
                    ThrowError(CODBCERR::eMoreResults);

                if ( rc =
                SQLFetch(m_hstmt)) == SQL_ERROR)
                    ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
            SQL_CLOSE);

            // Check Fetch return
            code for no rows returned.
            // It means customer id
            or warehouse id were invalid.
            //
            if (rc == SQL_NO_DATA)

```

```

                throw new
                CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_INVALID_NEW_ORDER_
                PARAM);

            1)
                if (m_no_commit_flag ==
                {
                    m_txn.NewOrder.total_amount *= ((1 +
                    m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
                    m_txn.NewOrder.c_discount));

                    m_txn.NewOrder.exec_status_code = eOK;
                }
                else
                    m_txn.NewOrder.exec_status_code =
                    eInvalidItem;

                    break;
                }
                catch (CODBCERR *e)
                {
                    if (!e->m_bDeadLock)
                        || (++iTryCount > iMaxRetries))
                            throw;

                    // hit deadlock;
                    backoff for increasingly longer period
                    delete e;
                    Sleep(10 * iTryCount);
                }
            }

            //
            // if (iTryCount)
            //     throw new
            CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
            iTryCount);
        }

        void CTPCC_ODBC::InitPaymentParams()
        {
            if ( SQLAllocHandle(SQL_HANDLE_STMT,
            m_hdbc, &m_hstmtPayment) != SQL_SUCCESS )

                ThrowError(CODBCERR::eAllocHandle);

            m_hstmt = m_hstmtPayment;

            int i = 0;
            if ( SQLBindParameter(m_hstmt, ++i,
            SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
            &m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
            SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
            &m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
            SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
            &m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
            SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
            &m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS

```

```

                || SQLBindParameter(m_hstmt, ++i,
            SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
            &m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
            SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
            &m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
            SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
            sizeof(m_txn.Payment.c_last), 0,
            &m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
            NULL) != SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);

            i = 0;
            if ( SQLBindCol(m_hstmt, ++i,
            SQL_C_SLONG, &m_txn.Payment.c_id, 0,
            NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.c_last,
            sizeof(m_txn.Payment.c_last), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
            0, NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.w_street_1,
            sizeof(m_txn.Payment.w_street_1), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.w_street_2,
            sizeof(m_txn.Payment.w_street_2), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.w_city,
            sizeof(m_txn.Payment.w_city), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.w_state,
            sizeof(m_txn.Payment.w_state), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.w_zip,
            sizeof(m_txn.Payment.w_zip), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.d_street_1,
            sizeof(m_txn.Payment.d_street_1), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.d_street_2,
            sizeof(m_txn.Payment.d_street_2), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.d_city,
            sizeof(m_txn.Payment.d_city), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.d_state,
            sizeof(m_txn.Payment.d_state), NULL) !=
            SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
            SQL_C_CHAR, &m_txn.Payment.d_zip,

```

```

        sizeof(m_txn.Payment.d_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_first,
sizeof(m_txn.Payment.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_middle,
sizeof(m_txn.Payment.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_1,
sizeof(m_txn.Payment.c_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_2,
sizeof(m_txn.Payment.c_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_city,
sizeof(m_txn.Payment.c_city), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_state,
sizeof(m_txn.Payment.c_state), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_zip,
sizeof(m_txn.Payment.c_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_phone,
sizeof(m_txn.Payment.c_phone), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_credit,
sizeof(m_txn.Payment.c_credit), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_credit_lim, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_discount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_balance, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_data,
sizeof(m_txn.Payment.c_data), NULL) !=
SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    //Compose Payment statement
    _snprintf(m_szPaymentCommand,
sizeof(m_szPaymentCommand)/sizeof(m_szPaymentCommand[
0]),
        L"%s{call %stppc_payment
(?,?,?,?,,?)}", m_szSPPrefix);

```

```

    }
void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount =
0;
    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szPaymentCommand, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            if (m_txn.Payment.c_id
== 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code = eOK;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!e->m_bDeadLock)
                throw;

            // hit deadlock;
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{

```

```

        if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eAllocHandle);

        m_hstmt = m_hstmtOrderStatus;

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        // configure block cursor
        if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) !=
SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS
        )
            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_supply_w_id,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_i_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.OL[0].ol_quantity,
0, NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.OL[0].ol_delivery_d, 0, NULL) !=
SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.c_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_first,
sizeof(m_txn.OrderStatus.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_middle,
sizeof(m_txn.OrderStatus.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.o_carrier_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.c_balance, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.o_id, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    //Compose Order Status statement
    _snprintf(m_szOrderStatusCommand,
sizeof(m_szOrderStatusCommand)/sizeof(m_szOrderStatus
Command[0]),
        L"call %stppc_orderstatus
(?,?,?,?)", m_szSPPrefix);
}

void CTPCC_ODBC::OrderStatus()
{
    int
    RETCODE
    rc;

    int
    iTryCount = 0;
}

```

```

m_hstmt = m_hstmtOrderStatus;

if (m_txn.OrderStatus.c_id != 0)
    m_txn.OrderStatus.c_last[0] = 0;

while (TRUE)
{
    try
    {
        if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        // configure block
        cursor
            if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )

                ThrowError(CODBCERR::eSetStmtAttr);

                rc =
SQLExecDirectW(m_hstmt, m_szOrderStatusCommand,
SQL_NTS);
                if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                    ThrowError(CODBCERR::eExecDirect);

        // configure block
        cursor
            if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OL_ORDER_STATUS_ITEMS, 0) !=
SQL_SUCCESS )

                ThrowError(CODBCERR::eSetStmtAttr);

                rc = SQLFetchScroll(
m_hstmt, SQL_FETCH_NEXT, 0 );
                //
                if ( !(rc ==
SQL_SUCCESS) || ((rc == SQL_SUCCESS_WITH_INFO) &&
(m_RowsFetched != 0))) )

                    if ( rc !=
SQL_SUCCESS )

                        ThrowError(CODBCERR::eFetchScroll);

                m_txn.OrderStatus.o_ol_cnt =
(short)m_RowsFetched;

                if
                (m_txn.OrderStatus.o_ol_cnt != 0)
                {
                    if (
SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) !=
SQL_SUCCESS )

```

```

        ThrowError(CODBCERR::eSetStmtAttr);

        //
        if (
SQLMoreResults(m_hstmt) == SQL_ERROR )
            if ( rc =
SQLMoreResults(m_hstmt) != SQL_SUCCESS )
                {
                    ThrowError(CODBCERR::eMoreResults);
                }

        //
        if ( rc =
SQLFetch(m_hstmt) == SQL_ERROR )
            if ( rc =
SQLFetch(m_hstmt) != SQL_SUCCESS )
                ThrowError(CODBCERR::eFetch);
            }

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            if
            (m_txn.OrderStatus.o_ol_cnt == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
            else if
            (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else

                m_txn.OrderStatus.exec_status_code = eOK;

                break;
            }
            catch (CODBCERR *e)
            {
                if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                    throw;

                // hit deadlock;
                // backoff for increasingly longer period
                delete e;
                Sleep(10 * iTryCount);
            }
        }

        //
        if (iTryCount)
            throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
    }

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS )

```

```

ThrowError(CODBCERR::eAllocHandle);

m_hstmt = m_hstmtDelivery;

int i = 0;
if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindParam);

for (i=0;i<10;i++)
{
    if ( SQLBindCol(m_hstmt,
(UWORD)(i+1), SQL_C_SLONG, &m_txn.Delivery.o_id[i],
0, NULL) != SQL_SUCCESS )

    ThrowError(CODBCERR::eBindCol);
}

//Compose Delivery statement
_snpprintf(m_szDeliveryCommand,
sizeof(m_szDeliveryCommand)/sizeof(m_szDeliveryComman
d[0]),
    L"{call %stpcc_delivery (?,?)}",
m_szSPPrefix);
}

void CTPCC_ODBC::Delivery()
{
    RETCODE        rc;
    int             iTryCount =
0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szDeliveryCommand,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR )

                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
    }
}

```

```

        catch (CODBCERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

tpcc_odbc.h
/* FILE: TPC_C_ODBC.H
Microsoft
TPC-C Kit Ver. 4.20.000
Copyright
Microsoft, 1999
All Rights Reserved
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
* PURPOSE: Header file for TPC-C txn class
implementation.
* Change history:
* 4.20.000 - updated rev number to
match kit
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

#define IMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        // error from SQLAllocConnect
        eAllocHandle,
        // error from SQLAllocHandle
    }
};

```

```

        eConnOption,
// error from SQLSetConnectOption
        eConnect,
// error from SQLConnect
        eAllocStmt,
// error from SQLAllocStmt
        eExecDirect,
// error from SQLExecDirect
        eBindParam,
// error from SQLBindParameter
        eBindCol,
// error from SQLBindCol
        eFetch,
// error from SQLFetch
        eFetchScroll,
// error from SQLFetchScroll
        eMoreResults,
// error from SQLMoreResults
        ePrepare,
// error from SQLPrepare
        eExecute,
// error from SQLExecute
        eSetEnvAttr,
// error from SQLSetEnvAttr
        eSetStmtAttr,
// error from SQLSetStmtAttr
    };

    CODBCERR(void)
    {
        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_odbcerrstr = NULL;
    };

    ~CODBCERR()
    {
        if (m_odbcerrstr !=
NULL)
            delete []
m_odbcerrstr;
    };

    ACTION m_eAction;
    int m_NativeError;
    BOOL m_bDeadLock;
    char *m_odbcerrstr;

    int ErrorType()
    {return ERR_TYPE_ODBC;}
    char* ErrorTypeStr() { return
"ODBC"; }
    int ErrorNum()
    {return m_NativeError;}
    char* ErrorText() {return
m_odbcerrstr;}
    int ErrorAction()
    { return (int)m_eAction; }
};

class CTPCC_ODBC_ERR : public CBaseErr

```

```

{
    public:
        enum TPCC_ODBC_ERRS
        {
            ERR_WRONG_SP_VERSION =
1, // "Wrong version of stored procs on
database server"
            ERR_INVALID_CUST,
            // "Invalid Customer id,name."
            ERR_NO_SUCH_ORDER,
            // "No orders found for
customer."
            ERR_RETRIED_TRANS,
            // "Retries before transaction
succeeded."

            ERR_INVALID_NEW_ORDER_PARAM // "New Order
parameter invalid."
        };

        CTPCC_ODBC_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };

        CTPCC_ODBC_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

        int m_errno;
        int m_iTryCount;

        int ErrorType()
{return ERR_TYPE_TPCC_ODBC;};
        char* ErrorTypeStr() { return
"TPCC ODBC"; }
        int ErrorNum()
{return m_errno;};

        char* ErrorText();

class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
    private:
        // declare variables and private
functions here...
        BOOL m_bDeadlock;
        // transaction was selected as
deadlock victim
        int m_MaxRetries; // retry
count on deadlock

        SQLHENV m_henv;
        // ODBC environment
handle
        SQLHDBC m_hdbc;
        SQLHSTMT m_hstmt;
        // the current hstmt

        SQLHSTMT m_hstmtNewOrder;
        SQLHSTMT
m_hstmtNewOrderNoDuplicates; // NewOrder
with one result set for lineitem details

```

```

SQLHSTMT m_hstmtPayment;
SQLHSTMT m_hstmtDelivery;
SQLHSTMT m_hstmtOrderStatus;
SQLHSTMT m_hstmtStockLevel;

SQLHDESC m_descNewOrderCols1;
SQLHDESC m_descNewOrderCols2;
SQLHDESC
m_descNewOrderNoDuplicatesCols1; //
NewOrder with one result set for lineitem details
SQLHDESC
m_descNewOrderNoDuplicatesCols2; //
NewOrder with one result set for lineitem details
SQLHDESC m_descOrderStatusCols1;
SQLHDESC m_descOrderStatusCols2;

        wchar_t
m_szSPPrefix[32]; // stored procedures
prefix

        wchar_t
m_szNewOrderCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szNewOrderNoDuplicatesCommand[IMAX_SP_NAME
E_LEN];

        int
m_iBeginNewOrderVariablePart; // begining
of the variable part in NewOrder statement
        int
m_iBeginNewOrderNoDuplicatesVariablePart;
// begining of the variable part in
NewOrder statement

        wchar_t
m_szPaymentCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szDeliveryCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szOrderStatusCommand[IMAX_SP_NAME_LEN];
        wchar_t
m_szStockLevelCommand[IMAX_SP_NAME_LEN];

        // new-order specific fields
SQLUIINTEGER m_BindOffset;
SQLUIINTEGER
m_RowsFetched;
        int
m_no_commit_flag;

        // tpcc_neworder_new flag
        BOOL
m_bCallNoDuplicatesNewOrder;

        //void ThrowError(
COBCEER::ACTION eAction );
        void ThrowError( RETCODE eAction
);

        void InitNewOrderParams();
        void InitPaymentParams();
        void InitDeliveryParams();
        void InitStockLevelParams();
        void InitOrderStatusParams();

```

```

union
{
    NEW_ORDER_DATA
NewOrder;
    PAYMENT_DATA
Payment;
    DELIVERY_DATA
Delivery;
    STOCK_LEVEL_DATA
StockLevel;
    ORDER_STATUS_DATA
OrderStatus;
}
m_txn;

        bool DuplicatesInNewOrder();
        void NewOrderDuplicates();
        void NewOrderNoDuplicates();

    public:
        CTPCC_ODBC( LPCWSTR
szServer, LPCWSTR szUser, LPCWSTR szPassword,
LPCWSTR szHost, LPCWSTR szDatabase,
LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder);
        ~CTPCC_ODBC(void);

        inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
        inline PPAYMENT_DATA
BuffAddr_Payment() { return
&m_txn.Payment; };
        inline PDELIVERY_DATA
BuffAddr_Delivery() { return
&m_txn.Delivery; };
        inline PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
        inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

        void NewOrder ();
        void Payment ();
        void Delivery ();
        void StockLevel ();
        void OrderStatus ();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
( LPCWSTR szServer, LPCWSTR szUser,
LPCWSTR szPassword,
LPCWSTR szHost, LPCWSTR szDatabase,
LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );

```

```
typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCWSTR, BOOL);
```

## **tpcc\_oledb.cpp**

```
/* FILE: TPC_C_OLEDB.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.42.000
 * Copyright
 * Microsoft, 2004
 * Written by
 * Sergey Vasilevskiy
 * All Rights Reserved
 *
 * PURPOSE: Implements OLEDB calls for TPC-C
 * txns.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 */

#include <windows.h>
#include <stdio.h>
#include <assert.h>
#include <stddef.h>

#define DBINITCONSTANTS
#include <oledb.h>
// #include <sqloledb.h> // Use MDAC
#include <sqlncli.h> // Use SNAC
#include <oledberr.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_oledb.h"

#ifdef SQL_MAX_MESSAGE_LENGTH
#define SQL_MAX_MESSAGE_LENGTH 512
#endif

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 10; // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";
```

```
// this needs to be the same as the max length of
machine/database/user/password in Benchcraft
(engstut.h)
const static int iMaxNameLen = 32;

BOOL WINAPIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            break;

        case DLL_PROCESS_DETACH:
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_OLEDB_ERR::ErrorText
 * */
char* CTPCC_OLEDB_ERR::ErrorText(void)
{
    int i;
    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRIED_TRANS,
        "Retries before transaction succeeded." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
```

```

    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_OLEDB* CTPCC_OLEDB_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, //
user name for login
LPCSTR szPassword, // password
for login
LPCSTR szHost, //
not used
LPCSTR szDatabase, // name of
database to use
LPCWSTR szSPPrefix ) //
prefix to append to the stored procedure names
{
    return new CTPCC_OLEDB( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix );
}

CTPCC_OLEDB::CTPCC_OLEDB (
LPCSTR szServer,
// name of SQL server
LPCSTR szUser,
// user name for login
LPCSTR szPassword,
// password for login
LPCSTR szHost,
// not used
LPCSTR szDatabase,
// name of database to use
LPCWSTR szSPPrefix
// prefix to append to the stored procedure
names
)
: m_pIMalloc(NULL)
{
    int
iRc;
int
i;
HRESULT hr;

IDBInitialize*
pIDBInitialize = NULL; //
data source interface
IDBProperties*
pIDBProperties = NULL;
ICommandText*
pICommandText;
// SQL command without parameters
wchar_t
szwServer[iMaxNameLen]; //
Unicode string used to convert to BSTR
```



```

        wchar_t
        szwDatabase[iMaxNameLen];    // Unicode
string used to convert to BSTR
        wchar_t
        szwUser[iMaxNameLen];        //
Unicode string used to convert to BSTR
        wchar_t
        szwPassword[iMaxNameLen];    // Unicode
string used to convert to BSTR

        // Copy stored procedures prefix
        wcsncpy(m_szsppPrefix, szsppPrefix,
sizeof(m_szsppPrefix)/sizeof(m_szsppPrefix[0]));

        // Convert single byte ANSI strings to
Unicode (for later conversion to BSTR)
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szServer, (int)strlen(szServer)+1,
szwServer, iMaxNameLen);
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szDatabase,
(int)strlen(szDatabase)+1, szwDatabase, iMaxNameLen);
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szUser, (int)strlen(szUser)+1,
szwUser, iMaxNameLen);
        iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szPassword,
(int)strlen(szPassword)+1, szwPassword, iMaxNameLen);

        // Initialize COM library to be able to use
OLE-DB interfaces
        CoInitialize(NULL);

        // Initialization - create SQLOLEDB
component
        //hr = CoCreateInstance(CLSID_SQLOLEDB, //
GUID of SQLOLEDB component
        // Compile for SNAC
        hr = CoCreateInstance(CLSID_SQLNCLI, //
GUID of SQLNCLI component
        NULL,
        // not defining an aggregate
component, so NULL
        CLSCTX_INPROC_SERVER, //
run the component in our process
        IID_IDBInitialize,
        (void **) &pIDBInitialize);

        /*
        Initialize the property values needed
        to establish the connection.
        */
        for(i = 0; i < 4; i++)
            VariantInit(&m_InitProperties[i].vValue);
        //Server name.
        m_InitProperties[0].dwPropertyID =
DBPROP_INIT_DATASOURCE;
        m_InitProperties[0].vValue.vt = VT_BSTR;
        m_InitProperties[0].vValue.bstrVal=
SysAllocString(szwServer);
        m_InitProperties[0].dwOptions =
DBPROPOPTIONS_REQUIRED;
        m_InitProperties[0].colid = DB_NULLID;
        //Database.

```

```

        m_InitProperties[1].dwPropertyID =
DBPROP_INIT_CATALOG;
        m_InitProperties[1].vValue.vt = VT_BSTR;
        m_InitProperties[1].vValue.bstrVal=
SysAllocString(szwDatabase);
        m_InitProperties[1].dwOptions =
DBPROPOPTIONS_REQUIRED;
        m_InitProperties[1].colid = DB_NULLID;
        //Username (login).
        m_InitProperties[2].dwPropertyID =
DBPROP_AUTH_USERID;
        m_InitProperties[2].vValue.vt = VT_BSTR;
        m_InitProperties[2].vValue.bstrVal=
SysAllocString(szwUser);
        m_InitProperties[2].dwOptions =
DBPROPOPTIONS_REQUIRED;
        m_InitProperties[2].colid = DB_NULLID;
        //Password.
        m_InitProperties[3].dwPropertyID =
DBPROP_AUTH_PASSWORD;
        m_InitProperties[3].vValue.vt = VT_BSTR;
        m_InitProperties[3].vValue.bstrVal=
SysAllocString(szwPassword);
        m_InitProperties[3].dwOptions =
DBPROPOPTIONS_REQUIRED;
        m_InitProperties[3].colid = DB_NULLID;
        /*
        Construct the DBPROPSET
        structure(m_rgInitPropSet). The
        DBPROPSET structure is used to pass an array of
        DBPROP
        structures (m_InitProperties) to the
        SetProperties method.
        */
        m_rgInitPropSet.guidPropertySet =
DBPROPSET_DBINIT;
        m_rgInitPropSet.cProperties = 4;
        m_rgInitPropSet.rgProperties =
m_InitProperties;
        //Set initialization properties.
        if (FAILED(hr = pIDBInitialize-
>QueryInterface(IID_IDBProperties,
        (void **) &pIDBProperties)))
        {
            ThrowError(pIDBInitialize,
COLEDBERR::eQueryInterface, "CTPCC_OLEDB()");
        }

        hr = pIDBProperties->SetProperties(1,
&m_rgInitPropSet);

        pIDBProperties->Release();
        //Now establish the connection to the data
source.
        hr = pIDBInitialize->Initialize();

        // Free BSTR property strings
        for(i = 0; i < 4; i++)
        {

```

```

SysFreeString(m_InitProperties[i].vValue.bstrVal);
        }

        hr = pIDBInitialize-
>QueryInterface(IID_IDBCreateSession, (void
**) &m_pIDBCreateSession);

        // Releasing this has no effect on the SQL
Server connection
        // of the data source object because of the
reference maintained by
        // m_pIDBCreateSession.
        pIDBInitialize->Release();
        pIDBInitialize = NULL;

        hr = m_pIDBCreateSession-
>CreateSession(NULL, IID_IDBCreateCommand, (IUnknown
**) &m_pIDBCreateCommand);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateSession,
COLEDBERR::eCreateSession, "CTPCC_OLEDB()");
        }

        hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**) &pICommandText);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CTPCC_OLEDB()");
        }

        hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"set nocount on set
XACT_ABORT ON");
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CTPCC_OLEDB()");
        }

        hr = pICommandText->Execute(NULL, IID_NULL,
NULL, NULL, NULL);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eExecute, "CTPCC_OLEDB()");
        }

        pICommandText->Release();

        // verify that version of stored procs on
server is correct
        CheckSPVersion();

        // Get IMalloc interface
        hr = CoGetMalloc(1, (LPMAALLOC
**) &m_pIMalloc);

```

```

        // Bind parameters for each of the
transactions
    InitNewOrderParams();
    InitPaymentParams();
    InitOrderStatusParams();
    InitDeliveryParams();
    InitStockLevelParams();
}

CTPCC_OLEDB::~CTPCC_OLEDB( void )
{
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc->Release();
    }
    m_pIPaymentCommand->Release();
    m_pIDBCreateCommand->Release();
    m_pIDBCreateSession->Release();

    CoUninitialize(); // uninitialized COM
}

library
{
    /*
    *      Check stored procedures version on the
    server.
    */
    void CTPCC_OLEDB::CheckSPVersion()
    {
        HRESULT                hr;
        char
        db_sp_version[10];
        ICommandText*         pICommandText;
        IAccessor*             pIAccessor;
        IRowset*               pRowset;
        const ULONG           nOutputParams
= 1;
        // output 1st result set columns
        HACCESSOR
        hTpccVersionOutputAccessor;
        // Structure to bind in accessor
        DBBINDING
        acOutputDBBinding[nOutputParams];
        DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];
        LONG                  cRows = 1;
        // number of rows returned in the rowset
        ULONG
        cRowsObtained;
        HROW                  rghRow;
        //returned row handles
        HROW*                 prghRow =
&rghRow;

        hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**) &pICommandText);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CheckSPVersion()");
        }
    }
}

```

```

        hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"{call tpcc_version}");
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CheckSPVersion()");
        }

        hr = pICommandText-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eQueryInterface, "CheckSPVersion()");
        }

        // Now fill the binding information for
result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        // Binding for a rowset
        SetBinding(&acOutputDBBinding[0], 0,
sizeof(db_sp_version), DBTYPE_STR);

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_ROWDATA,
            nOutputParams,
            acOutputDBBinding,
            sizeof(db_sp_version),

            &hTpccVersionOutputAccessor,
            acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "CheckSPVersion()");
        }

        hr = pICommandText->Execute(NULL,
IID_IRowset, NULL, NULL, (IUnknown **) &pRowset);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eExecute, "CheckSPVersion()");
        }

        // Fetch the result row handle(s)
        hr = pRowset->GetNextRows(DB_NULL_HCHAPTER,
0, cRows, &cRowsObtained, &prghRow);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eGetNextRows, "CheckSPVersion()");
        }

        // Fetch the actual row data by handle
        hr = pRowset->GetData(rghRow,
hTpccVersionOutputAccessor, &db_sp_version);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eGetData, "CheckSPVersion()");
        }
    }
}

```

```

    }

    // Release row(s)
    hr = pRowset->Release();

    pICommandText->Release();

    // Check the retrieved version
    if (strcmp(db_sp_version,sVersion))
        throw new
CTPCC_OLEDB_ERR(
    CTPCC_OLEDB_ERR::ERR_WRONG_SP_VERSION );
}

void CTPCC_OLEDB::ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation)
{
    HRESULT
    hr;
    //char
    szState[6];
    char
    szMsg[SQL_MAX_MESSAGE_LENGTH];
    char
    szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    COLEDBERR
    *pOLEDBErr;
    //
    not allocated until needed (maybe never)
    int
    iLen;
    // Interfaces
    IErrorInfo*           pIErrorInfoAll
= NULL;
    IErrorInfo*           pIErrorInfoRecord
= NULL;
    IErrorRecords*        pIErrorRecords
= NULL;
    ISupportErrorInfo*    pISupportErrorInfo
= NULL;
    ISQLServerErrorInfo*
pISQLServerErrorInfo = NULL;
    ISQLErrorInfo*
pISQLErrorInfo = NULL;

    // Information used when cannot get custom
error object
    ERRORINFO
    BasicErrorInfo;
    BSTR
    bstrDescription;
    // Number of error records.
    ULONG                 nRecs;
    ULONG                 nRec;

    // SQL Server error information from
ISQLServerErrorInfo.
    SSERRORINFO*          pSSErrorInfo =
NULL;
    OLECHAR*              pSSErrorStrings =
NULL;

    assert(pObjectWithError != NULL);
}

```

```

pOLEDBErr = new COLEDBERR(szLocation);

pOLEDBErr->m_NativeError = 0;
pOLEDBErr->m_eAction = eAction;
pOLEDBErr->m_bDeadLock = FALSE;

szTmp[0] = 0;

// Only ask for error information if the
interface supports it.
// Note: SQLOLEDB provider supports error
interface, so this check is
// for good style only.
hr = pObjectWithError-
>QueryInterface(IID_ISupportErrorInfo, (void**)
&pISupportErrorInfo);
if (FAILED(hr))
{
    _snprintf(szMsg, sizeof(szMsg),
"SupportErrorInfo interface not supported (hr=0x%X)",
hr);
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
    throw pOLEDBErr;
}
/*if (FAILED(pISupportErrorInfo-
>InterfaceSupportsErrorInfo(IID_InterfaceWithError))
{
    _snprintf(szMsg, sizeof(szMsg),
"InterfaceWithError
interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
}*/
return;

// Do not test the return of GetErrorInfo.
It can succeed and return
// a NULL pointer in pErrorInfoAll. Simply
test the pointer.
GetErrorInfo(0, &pErrorInfoAll);

if (pErrorInfoAll != NULL)
{
    // Test to see if it's a valid
OLE DB IErrorInfo interface
    // exposing a list of records.
    if (SUCCEEDED(pErrorInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)
&pIErrorRecords)))
    {
        pIErrorRecords-
>GetRecordCount(&nRecs);

        // Within each record,
retrieve information from each
        // of the defined
interfaces.

```

```

for (nRec = 0; nRec <
nRecs; nRec++)
{
    // Request
the generic SQL error interface.
    pIErrorRecords->GetCustomErrorObject(nRec,

    IID_ISQLErrorInfo, // generic SQL error
interface
    (IUnknown**) &pISQLErrorInfo);

    if
    (pISQLErrorInfo != NULL)
    {
        //
Request SQL Server-specific error interface, not the
generic SQL error interface.
        pISQLErrorInfo->QueryInterface(

        IID_ISQLServerErrorInfo, // SQL Server
error interface

        (void**) &pISQLServerErrorInfo);
    }
    // Test to
ensure the reference is valid, then
// get error
information from ISQLServerErrorInfo.
    if
    (pISQLServerErrorInfo != NULL)
    {
        pISQLServerErrorInfo-
>GetErrorInfo(&pSSErrorInfo, &pSSErrorStrings);

        //
ISQLServerErrorInfo::GetErrorInfo succeeds
//
even when it has nothing to return. Test the
//
pointers before using.
        if
        (pSSErrorInfo)
        {
            // First, add the error message.

            // Convert Unicode error string to ANSI.
            WideCharToMultiByte(CP_THREAD_ACP, 0,

            pSSErrorInfo->pwszMessage, -1,

            szMsg, sizeof(szMsg),

            NULL, NULL);

```

```

// quit if there isn't enough room to
concatenate error text
    if ( (strlen(szMsg) + 2) > (sizeof(szTmp) -
strlen(szTmp)) )
        break;

// include line break after first error msg
if (szTmp[0] != 0)
    strcat( szTmp, "\r\n");

// concatenate the error record to the
overall error message
    strcat( szTmp, szMsg );

// Second, add the stored procedure name
and line number, if available.

    if (wcslen(pSSErrorInfo->pwszProcedure)>0)
    {
        // Prefix with a line break
        iLen = sprintf(szMsg,
"\r\nProcedure: ");

        // Convert Unicode error string
to ANSI.
        WideCharToMultiByte(CP_THREAD_ACP, 0,

        pSSErrorInfo-
>pwszProcedure, -1,

        &szMsg[iLen],

        sizeof(szMsg) - iLen,

        NULL, NULL);

        // Check if have space to add the
line number.
        // Assume the line number takes
no more than 3 digits.
        if ((strlen(szMsg) + 4) <
sizeof(szMsg))
    {

```

```

        _snprintf(&szMsg[strlen(szMsg)],
sizeof(szMsg),
                "%d",
pSSErrorInfo->wLineNumber);
    }

    // quit if there isn't enough
room to concatenate error text
    if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
        break;

    // concatenate the error record
to the overall error message
    strcat( szTmp, szMsg );

    // copy the overall error string
to the exception
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szTmp)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szTmp);
}

// Third, capture the (first) database
error
    if (pOLEDBErr->m_NativeError == 0 &&
pSSErrorInfo->lNative != 0)
    {
        pOLEDBErr->m_NativeError =
pSSErrorInfo->lNative;

        // Check for deadlock error code
and set the deadlock flag
        if (pSSErrorInfo->lNative ==
1205)
        {
            pOLEDBErr->m_bDeadLock
= TRUE;
        }
    }

```

```

    }

    // IMalloc::Free needed to release
references
    // on returned values.
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc->Free(pSSErrorStrings);
        m_pIMalloc->Free(pSSErrorInfo);
    }

    pISQLServerErrorInfo->Release();
    }
else
{
    Custom error object is not supported. //
    Use general OLE-DB error interface. //
    Get the numeric error code //
    pIErrorRecords->GetBasicErrorInfo(nRec,
&BasicErrorInfo);
    if
(pOLEDBErr->m_NativeError == 0)
    {
        // Get the failed call HRESULT code, which
is not really the native error
        pOLEDBErr->m_NativeError =
BasicErrorInfo.hrError;
    }
    //
    Try to get the string description of the error. //
    pIErrorRecords->GetErrorInfo(nRec,
LOCALE_USER_DEFAULT,
(IErrorInfo**&pIErrorInfoRecord);
    if
(pIErrorInfoRecord)
    {
        pIErrorInfoRecord->GetDescription(&bstrDescription);
    }
}

```

```

    // Convert Unicode error string to ANSI.
    WideCharToMultiByte(CP_THREAD_ACP, 0,
        bstrDescription, -1,
        szMsg, sizeof(szMsg),
        NULL, NULL);

    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr, szMsg);
}
} // for()
} // if
(SUCCEEDED(pIErrorInfoAll->QueryInterface(IID_IErrorRecords, (void**)
&pIErrorRecords)))
else
{
    // No IErrorRecords
interface supported. Use default IErrorInfo.
    // Note: SQLOLEDB
supports IErrorRecords, so this check is for good
style only.
    _snprintf(szMsg,
sizeof(szMsg), "IErrorRecords interface not
supported");
    pOLEDBErr->m_OLEDBErrStr = new char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr, szMsg);
}
pIErrorInfoAll->Release();
} // if (pIErrorInfoAll != NULL)
else
{
    // No IErrorInfo interface
supported.
    // Note: SQLOLEDB supports
IErrorInfo, so this check is for good style only.
    _snprintf(szMsg, sizeof(szMsg),
"IErrorInfo interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
}
    throw pOLEDBErr;
}
/*
*

```

```

*         Create a new command object from the SQL
text passed in.
*
*/
void CTPCC_OLEDB::CreateCommand(wchar_t*
szSQLCommand, // I: SQL
query for the command

                                ICommandText**
ppICommandText // O: returned command object
{
    HRESULT hr;

    // Create a new command object
    hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**)ppICommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand,
"CTPCC_OLEDB::CreateCommand");
    }

    // Set command text
    hr = (*ppICommandText)-
>SetCommandText(DBGUID_SQL, szSQLCommand);
    if (FAILED(hr))
    {
        ThrowError(*ppICommandText,
COLEDBERR::eSetCommandText,
"CTPCC_OLEDB::CreateCommand");
    }

    // Prepare the command
    PrepareCommand(*ppICommandText);
}

/*
*         QueryInterface and Prepare in one function
for simplicity.
*         DEFERRED PREPARE property is set to off to
prepare immediately.
*/
void CTPCC_OLEDB::PrepareCommand(ICommandText*
pICommandText)
{
    HRESULT hr;
    ICommandPrepare* pICommandPrepare;
    ICommandProperties* pICommandProperties;
    DBPROPSET
rowSetPropSet;
DBPROP
rowSetProp;

    // Set the deferred prepare property to
false.
rowSetProp.dwPropertyID =
SSPROP_DEFERPREPARE;
memset(&rowSetProp.vValue, 0,
sizeof(rowSetProp.vValue));

```

```

rowSetProp.dwOptions =
DBPROPOPTIONS_REQUIRED;
rowSetProp.colid = DB_NULLID;

rowSetPropSet.cProperties = 1;
rowSetPropSet.guidPropertySet =
DBPROPSET_SQLSERVERROWSET;
rowSetPropSet.rgProperties = &rowSetProp;

// Query interface for setting properties
hr = pICommandText-
>QueryInterface(IID_ICommandProperties, (void
**)&pICommandProperties);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Set the property set
hr = pICommandProperties->SetProperties(1,
&rowSetPropSet);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Get interface for preparing commands
hr = pICommandText-
>QueryInterface(IID_ICommandPrepare, (void
**)&pICommandPrepare);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Prepare Payment command
hr = pICommandPrepare->Prepare(0xFFFFFFFF);
if (FAILED(hr))
{
    ThrowError(pICommandPrepare,
COLEDBERR::ePrepare, "CTPCC_OLEDB::PrepareCommand");
}

/*
*         Initialize fields of an array of bindings
structures.
*         Needs to be called before setting
individual parameter/column bindings.
*/
void CTPCC_OLEDB::InitBindings(DBBINDING*
pDBBindings, // IO: array of bindings

                                int iCount, // I: number of
elements in the array

```

```

                                eBindingType BindingType) //
I: what the bindings will be used for
(parameters/columns)
{
    int i;

    for(i = 0; i < iCount; i++)
    {
        pDBBindings[i].iOrdinal = i + 1;
        pDBBindings[i].obLength = 0;
        pDBBindings[i].obStatus = 0;
        pDBBindings[i].pTypeInfo = NULL;
        pDBBindings[i].pObject = NULL;
        pDBBindings[i].pBindExt = NULL;
        pDBBindings[i].dwPart = DBPART_VALUE;

        switch (BindingType)
        {
            case eInputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT;
                break;
            case eOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_OUTPUT;
                break;
            case eInputOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT | DBPARAMIO_OUTPUT;
                break;
            case eOutputColumn:
                pDBBindings[i].eParamIO
= DBPARAMIO_NOTPARAM;
                break;
            default:
                assert(false); //
this should never happen
        }

        pDBBindings[i].dwMemOwner =
DBMEMOWNER_CLIENTOWNED;
        pDBBindings[i].dwFlags = 0;
        pDBBindings[i].bPrecision = 0;
        pDBBindings[i].bScale = 0;
    }
}

/*
*         Perform binding for one parameter or output
column.
*/
void CTPCC_OLEDB::SetBinding(DBBINDING* pDBBinding,
// I: binding row structure

                                size_t obValue, // I: parameter (column) offset in the user
buffer

                                size_t cbMaxLen, //
I: parameter (column) length

```

```

        DBTYPE wType
        // I: parameter (column) type
    }
}
pDBBinding->obValue = (ULONG)obValue;
pDBBinding->cbMaxLen = (ULONG)cbMaxLen;
pDBBinding->wType = wType;
}
void CTPCC_OLEDB::InitStockLevelParams()
{
    int            i;
    HRESULT        hr;
    wchar_t        szName[IMAX_SP_NAME_LEN];
    IAccessor*     pIAccessor;
    const ULONG    nInputParams = 3; // input parameters
    const ULONG    nOutputParams = 1; // output 1st result
    set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBinding[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];
    // Set command text
    _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"call
%stpcck_stocklevel (?,?,?)", m_szSPPrefix);
    // Create and Prepare a new command object
    for StockLevel.
    CreateCommand(szName,
&m_pIStockLevelCommand);
    // Describe the consumer buffer by filling
    in the array
    // of DBBINDING structures. Each binding
    associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);
    i = 0;
    // StockLevel parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, w_id),
sizeof(m_txn.StockLevel.w_id), DBTYPE_I4);
    // StockLevel parameter 2

```

```

        SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, d_id),
sizeof(m_txn.StockLevel.d_id), DBTYPE_UI1);
    // StockLevel parameter 3
    SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, threshold),
sizeof(m_txn.StockLevel.threshold), DBTYPE_I2);
    hr = m_pIStockLevelCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
    if (FAILED(hr))
    {
        ThrowError(m_pIStockLevelCommand,
COLEDBERR::eQueryInterface,
"InitStockLevelParams()");
    }
    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        nInputParams,
        acInputDBBinding,
        sizeof(STOCK_LEVEL_DATA),
&m_hStockLevelInputAccessor,
        acInputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitStockLevelParams()");
    }
    m_StockLevelExecuteParams.cParamSets = 1;
    m_StockLevelExecuteParams.hAccessor =
m_hStockLevelInputAccessor;
    m_StockLevelExecuteParams.pData =
&m_txn.StockLevel;
    // Now fill the binding information for
    result set 1 output columns
    InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);
    // Binding for a rowset that may return
    more than one row.
    i = 0;
    // StockLevel output column 1
    SetBinding(&acOutputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, low_stock),
sizeof(m_txn.StockLevel.low_stock), DBTYPE_I4);
    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(STOCK_LEVEL_DATA),
&m_hStockLevelOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {

```

```

        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitStockLevelParams()");
    }
}
void CTPCC_OLEDB::StockLevel()
{
    HRESULT        hr;
    int            iTryCount = 0;
    IRowset*       pRowset;
    LONG           cRows = 1;
    // number of rows returned in the rowset
    ULONG          cRowsObtained;
    HROW           rghRow;
    //returned row handles
    HROW*          prghRow =
&rghRow;
    while (TRUE)
    {
        try
        {
            // Execute the prepared
            command
            hr =
m_pIStockLevelCommand->Execute(NULL, IID_IRowset,
&m_StockLevelExecuteParams, NULL,
(IUnknown **)&pRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eExecute, "StockLevel()");
            }
            // Fetch the result row
            handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eGetNextRows, "StockLevel()");
            }
            // Fetch the actual row
            data by handle
            hr = pRowset-
>GetData(rghRow, m_hStockLevelOutputAccessor,
&m_txn.StockLevel);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eGetData, "StockLevel()");
            }
        }
    }
}

```

```

        // Release row(s)
        hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
        // Release rowset
        hr = pRowset-
>Release();

        m_txn.StockLevel.exec_status_code = eOK;

        break;
    }
    catch (COLEDBERR *e)
    {
        if (!e->m_bDeadLock)
    || (++iTryCount > iMaxRetries))
        throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    // if (iTryCount)
    //     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitNewOrderParams()
{
    int        i, j, iOlCount;
    HRESULT    hr;
    wchar_t    szName[MAX_SP_NAME_LEN];
    IAccessor* pIAccessor;
    const ULONG
nInputParams = 5 +
3*MAX_OL_NEW_ORDER_ITEMS; // input parameters
    const ULONG
nOutputParams = 5; // output 1st result
set columns
    const ULONG
nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING
acInputDBBinding[nInputParams];
    DBBINDSTATUS
acInputDBBindStatus[nInputParams];
    DBBINDING
acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];
    DBBINDING
acOutputDBBinding2[nOutputParams2];

```

```

    DBBINDSTATUS
acOutputDBBindStatus2[nOutputParams2];

    // Describe the consumer buffer by filling
in the array
    // of DBBINDING structures. Each binding
associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

    i = 0;
    // NewOrder parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, w_id),
sizeof(m_txn.NewOrder.w_id), DBTYPE_I4);

    // NewOrder parameter 2
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, d_id),
sizeof(m_txn.NewOrder.d_id), DBTYPE_UI1);

    // NewOrder parameter 3
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, c_id),
sizeof(m_txn.NewOrder.c_id), DBTYPE_I4);

    // NewOrder parameter 4
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o_ol_cnt),
sizeof(m_txn.NewOrder.o_ol_cnt), DBTYPE_UI1);

    // NewOrder parameter 5
    SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o_all_local),
sizeof(m_txn.NewOrder.o_all_local), DBTYPE_UI1);

    for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
    {
        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_i_id),
sizeof(m_txn.NewOrder.OL[j].ol_i_id), DBTYPE_I4);

        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_supply_w_id),
sizeof(m_txn.NewOrder.OL[j].ol_supply_w_id),
DBTYPE_I4);

        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_quantity),
sizeof(m_txn.NewOrder.OL[j].ol_quantity), DBTYPE_I2);
    }

    // Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

    // Binding for the order line rowsets (each
consist of one row).

```

```

    // Bind to offsets of the OL_NEW_ORDER_DATA
structure instead of NEW_ORDER_DATA.
    // IRowset::GetData() will be passed
individual array slots OL[i] to fetch the data
    // from the row set.

    i = 0;
    // NewOrder output column 1
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_name),
sizeof(m_txn.NewOrder.OL[0].ol_i_name), DBTYPE_STR);

    // NewOrder output column 2
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_stock),
sizeof(m_txn.NewOrder.OL[0].ol_stock), DBTYPE_I2);

    // NewOrder output column 3
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_brand_generic),
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic),
DBTYPE_STR);

    // NewOrder output column 4
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_price),
sizeof(m_txn.NewOrder.OL[0].ol_i_price), DBTYPE_R8);

    // NewOrder output column 5
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_amount),
sizeof(m_txn.NewOrder.OL[0].ol_amount), DBTYPE_R8);

    // Now fill the binding information for
result set 2 output columns
    InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

    i = 0;
    // NewOrder output column 1
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, w_tax),
sizeof(m_txn.NewOrder.w_tax), DBTYPE_R8);

    // NewOrder output column 2
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, d_tax),
sizeof(m_txn.NewOrder.d_tax), DBTYPE_R8);

    // NewOrder output column 3
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_id),
sizeof(m_txn.NewOrder.o_id), DBTYPE_I4);

    // NewOrder output column 4
    SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_last),
sizeof(m_txn.NewOrder.c_last), DBTYPE_STR);

    // NewOrder output column 5

```

```

        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_discount),
sizeof(m_txn.NewOrder.c_discount), DBTYPE_R8);

        // NewOrder output column 6
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_credit),
sizeof(m_txn.NewOrder.c_credit), DBTYPE_STR);

        // NewOrder output column 7
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_entry_d),
sizeof(m_txn.NewOrder.o_entry_d),
DBTYPE_DBTIMESTAMP);

        // NewOrder output column 8
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_commit_flag),
sizeof(m_txn.NewOrder.o_commit_flag), DBTYPE_I2);

        for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
        {
            // Set command text first
            // Print the fixed first portion
            // of parameters
            i = _snprintf(szName,
sizeof(szName)/sizeof(szName[0]),
            L"call %stpc_neworder (?,?,?,?,"
m_szSPPrefix);

            // Now print the variable portion
            // depending on the number of order line parameters
            for (iOlCount = 0; iOlCount <= j;
++iOlCount)
            {
                i +=
                _snprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L",?,?,?");
            }

            // Print the fixed end
            if (j != MAX_OL_NEW_ORDER_ITEMS -
1)
            {
                // append 'default' for
                // the parameters that are not used
                i +=
                _snprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L",default)");
            }
            else // using all 15 order
            // line parameters
            {
                i +=
                _snprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L")");
            }

            // Create and Prepare a new
            // command object for NewOrder.

```

```

        CreateCommand(szName,
&m_pINewOrderCommand[j]);

        // Now create the input accessor
        // for this prepared command
        hr = m_pINewOrderCommand[j]-
>QueryInterface(IID_IAccessor, (void **)&piAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pINewOrderCommand[j],
COLEDBERR::eQueryInterface, "InitNewOrderParams()");
        }

        hr = piAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,

3 * (j + 1),

        acInputDBBinding,

        sizeof(NEW_ORDER_DATA),

        &m_hNewOrderInputAccessor[j],

        acInputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        m_NewOrderExecuteParams[j].cParamSets = 1;
        //
        // m_NewOrderExecuteParams.hAccessor is set dynamically
        // at run-time
        // based on the number of new
        // order items for the particular transaction call.
        m_NewOrderExecuteParams[j].hAccessor =
m_hNewOrderInputAccessor[j];
        m_NewOrderExecuteParams[j].pData
= &m_txn.NewOrder;

        // Create accessor for the first
        // rowset
        hr = piAccessor->CreateAccessor(
DBACCESSOR_OPTIMIZED,

        nOutputParams,
        acOutputDBBinding,

        sizeof(OL_NEW_ORDER_DATA),

```

```

        &m_hNewOrderOutputAccessor[j],
        acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        // Create accessor for the second
        // rowset
        hr = piAccessor->CreateAccessor(
DBACCESSOR_ROWDATA, //
cannot be optimized too because #1 accessor is
nOutputParams2,
acOutputDBBinding2,
sizeof(NEW_ORDER_DATA),

        &m_hNewOrderOutputAccessor2[j],
        acOutputDBBindStatus2);
        if (FAILED(hr))
        {
            ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
        }

        piAccessor->Release();
    }

void CTPCC_OLEDB::NewOrder()
{
    HRESULT hr;
    int iTryCount = 0;
    IMultipleResults* pMultipleResults;
    IRowset* pRowset;
    IRowset* pRowset2;
    LONG cRows = 1; // number of rows
    returned in the 1st rowset
    ULONG cRowsObtained;
    HROW rghRows; //returned row handles
    for the 1st result set
    HROW* prghRows = &rghRows;
    LONG cRows2 = 1; // number of rows
    returned in the 2nd rowset
    ULONG cRowsObtained2;
    HROW rghRows2; //returned row handle
    for the 2nd result set
    HROW* prghRows2 = &rghRows2;
    int i;
    long lRowsAffected; // the number of
    affected rows for a rowset

```



```

        int
        iHandleIndex; // index into the
handle arrays based on the orders count

        // check whether any order lines are for a
remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
        {
            if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {
                m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                break;
            }
        }
        iHandleIndex = m_txn.NewOrder.o_ol_cnt - 1;
// for convenience
        while (TRUE)
        {
            try
            {
                // Execute the prepared
command (according to the number of new orders)
                // Ask for
IMultipleResults because it returns 2 rowsets.
                hr =
m_pINewOrderCommand[iHandleIndex]->Execute(
                    NULL, IID_IMultipleResults,
                    &m_NewOrderExecuteParams[iHandleIndex],
                    NULL,
                    (IUnknown **)&pMultipleResults);
                if (FAILED(hr))
                {
                    ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eExecute, "NewOrder()");
                }
            }
            // Get order line
results
            // Get order line
            m_txn.NewOrder.total_amount = 0;
            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; ++i)

```

```

        {
            // Get the
first rowset object
            hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset);
            if
(FAILED(hr))
            {
                char szTmp[256];
                _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=0x%X", i, hr);
                ThrowError(m_pINewOrderCommand[m_txn.NewOrd
er.o_ol_cnt - 1], COLEDBERR::eGetResult, szTmp);
            }
            // Fetch the
result row handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
            if
(FAILED(hr))
            {
                ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
            }
            // Fetch the
actual row data by handle
            hr = pRowset-
>GetData(rghRows,
m_hNewOrderOutputAccessor[iHandleIndex],
&m_txn.NewOrder.OL[i]);
            if
(FAILED(hr))
            {
                ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
            }
            m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
            // Release
row(s)
            hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
            // Release
rowset
            hr = pRowset-
>Release();
        }

```

```

            // Get the second
rowset object
            // Get the second
            hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset2);
            if (FAILED(hr))
            {
                char
szTmp[256];
                _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=%d", i, hr);
                ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetResult, szTmp);
            }
            // Fetch the result row
handle(s)
            hr = pRowset2-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
            if (FAILED(hr))
            {
                ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
            }
            // Fetch the actual row
data by handle
            hr = pRowset2-
>GetData(rghRows2,
m_hNewOrderOutputAccessor2[iHandleIndex],
&m_txn.NewOrder);
            if (FAILED(hr))
            {
                ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
            }
            // Release row(s)
            hr = pRowset2-
>ReleaseRows(cRowsObtained2, prghRows2, NULL, NULL,
NULL);
            // Release rowset
            hr = pRowset2-
>Release();
            // Release the common
MultipleResults interface
            hr = pMultipleResults-
>Release();
            if
(m_txn.NewOrder.o_all_local == 1)

```

```

        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
        {
            m_txn.NewOrder.exec_status_code =
eInvalidItem;
        }
        break;
    }
    catch (COLEDBERR *e)
    {
        if (!(e->m_bDeadLock))
        {
            ++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
        // throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitPaymentParams()
{
    int
        i;
    HRESULT
        hr;
    wchar_t
        szName[IMAX_SP_NAME_LEN];
    IAccessor*
        pIAccessor;
    const ULONG
        nInputParams = 7; // input parameters
        const ULONG
        nOutputParams = 27; // output result set
columns
    // Structure to bind in accessor
    DBBINDING
        acInputDBBinding[nInputParams];
    DBBINDSTATUS
        acInputDBBindStatus[nInputParams];
    DBBINDING
        acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];

    // Set command text

```

```

        _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]), L"call
%stpc_payment(?,?,?,?,?,?)", m_szSPPrefix);

        // Create and Prepare a new command object
for Payment.
        CreateCommand(szName, &m_pIPaymentCommand);

        // Describe the consumer buffer by filling
in the array
        // of DBBINDING structures. Each binding
associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

        i = 0;
        // Payment parameter 1
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, w_id),
sizeof(m_txn.Payment.w_id), DBTYPE_I4);

        // Payment parameter 2
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_w_id),
sizeof(m_txn.Payment.c_w_id), DBTYPE_I4);

        // Payment parameter 3
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, h_amount),
sizeof(m_txn.Payment.h_amount), DBTYPE_R8);

        // Payment parameter 4
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, d_id),
sizeof(m_txn.Payment.d_id), DBTYPE_UI1);

        // Payment parameter 5
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_d_id),
sizeof(m_txn.Payment.c_d_id), DBTYPE_UI1);

        // Payment parameter 6
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment parameter 7
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        hr = m_pIPaymentCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIPaymentCommand,
COLEDBERR::eQueryInterface, "InitPaymentParams()");
        }

        hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,

```

```

nInputParams,
acInputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentInputAccessor,
acInputDBBindStatus);

        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
        }

        m_PaymentExecuteParams.cParamSets = 1;
        m_PaymentExecuteParams.hAccessor =
m_hPaymentInputAccessor;
        m_PaymentExecuteParams.pData =
&m_txn.Payment;

        // Now fill the binding information for
output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        i = 0;
        // Payment output column 1
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment output column 2
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        // Payment output column 3
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, h_date),
sizeof(m_txn.Payment.h_date), DBTYPE_DBTIMESTAMP);

        // Payment output column 4
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_1),
sizeof(m_txn.Payment.w_street_1), DBTYPE_STR);

        // Payment output column 5
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_2),
sizeof(m_txn.Payment.w_street_2), DBTYPE_STR);

        // Payment output column 6
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_city),
sizeof(m_txn.Payment.w_city), DBTYPE_STR);

        // Payment output column 7
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_state),
sizeof(m_txn.Payment.w_state), DBTYPE_STR);

        // Payment output column 8
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_zip),
sizeof(m_txn.Payment.w_zip), DBTYPE_STR);

```

```

    // Payment output column 9
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

    // Payment output column 10
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

    // Payment output column 11
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

    // Payment output column 12
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

    // Payment output column 13
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

    // Payment output column 14
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_first),
sizeof(m_txn.Payment.c_first), DBTYPE_STR);

    // Payment output column 15
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_middle),
sizeof(m_txn.Payment.c_middle), DBTYPE_STR);

    // Payment output column 16
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

    // Payment output column 17
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

    // Payment output column 18
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

    // Payment output column 19
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

    // Payment output column 20
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

    // Payment output column 21

```

```

    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_phone),
sizeof(m_txn.Payment.c_phone), DBTYPE_STR);

    // Payment output column 22
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_since),
sizeof(m_txn.Payment.c_since), DBTYPE_DBTIMESTAMP);

    // Payment output column 23
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit),
sizeof(m_txn.Payment.c_credit), DBTYPE_STR);

    // Payment output column 24
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit_lim),
sizeof(m_txn.Payment.c_credit_lim), DBTYPE_R8);

    // Payment output column 25
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_discount),
sizeof(m_txn.Payment.c_discount), DBTYPE_R8);

    // Payment output column 26
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_balance),
sizeof(m_txn.Payment.c_balance), DBTYPE_R8);

    // Payment output column 27
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_data),
sizeof(m_txn.Payment.c_data), DBTYPE_STR);

    hr = piAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(PAYMENT_DATA),
        &m_hPaymentOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(piAccessor,
        COLEDBERR::eCreateAccessor, "InitPaymentParams()");
    }

    void CTPCC_OLEDB::Payment()
    {
        HRESULT hr;
        int
        iTryCount = 0;
        IRowset* pRowset;
        LONG cRows = 1;
        // number of rows returned in the rowset
        ULONG
        cRowsObtained;
        HROW rghRow;
        //returned row handles

```

```

        HROW* prghRow =
&rghRow;

        if (m_txn.Payment.c_id != 0)
            m_txn.Payment.c_last[0] = 0;

        while (TRUE)
        {
            try
            {
                // Execute the prepared
                command
                hr =
                m_pIPaymentCommand->Execute(NULL, IID_IRowset,
                &m_PaymentExecuteParams, NULL,

                (IUnknown **)&pRowset);
                if (FAILED(hr))
                {
                    ThrowError(m_pIPaymentCommand,
                    COLEDBERR::eExecute, "Payment()");
                }

                // Fetch the result row
                handle(s)
                hr = pRowset->
                >GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
                &cRowsObtained, &prghRow);
                if (FAILED(hr))
                {
                    ThrowError(m_pIPaymentCommand,
                    COLEDBERR::eGetNextRows, "Payment()");
                }

                // Fetch the actual row
                data by handle
                hr = pRowset->
                >GetData(rghRow, m_hPaymentOutputAccessor,
                &m_txn.Payment);
                if (FAILED(hr))
                {
                    ThrowError(m_pIPaymentCommand,
                    COLEDBERR::eGetData, "Payment()");
                }

                // Release row(s)
                hr = pRowset->
                >ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
                NULL);
                // Release rowset
                hr = pRowset->
                >Release();
                if (m_txn.Payment.c_id
                == 0)
                    throw new
                    CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
                else

```

```

        m_txn.Payment.exec_status_code = eOK;
        break;
    }
    catch (COLEDBERR *e)
    {
        if (!(e->m_bDeadLock))
        {
            if (++iTryCount > iMaxRetries)
            {
                throw;
            }
            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }
    // if (iTryCount)
    //     throw new
    CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
    iTryCount);
}

void CTPCC_OLEDB::InitOrderStatusParams()
{
    int
        i;
    HRESULT
        hr;
    wchar_t
        szName[IMAX_SP_NAME_LEN];
    IAccessor*
        pIAccessor;
    const ULONG
        nInputParams = 4; // input parameters
        nOutputParams = 5; // output 1st result
set columns
        const ULONG
        nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING
        acInputDBBinding[nInputParams];
    DBBINDSTATUS
        acInputDBBindStatus[nInputParams];
    DBBINDING
        acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];
    DBBINDING
        acOutputDBBinding2[nOutputParams2];
    DBBINDSTATUS
        acOutputDBBindStatus2[nOutputParams2];

    // Set command text
    _snwprintf(szName,
    sizeof(szName)/sizeof(szName[0]),
    L"call
    %stpcc_orderstatus (?, ?, ?, ?)", m_szSPPrefix);

```

```

    // Create and Prepare a new command object
    for OrderStatus.
        CreateCommand(szName,
        &m_pIOrderStatusCommand);

    // Describe the consumer buffer by filling
    in the array
    // of DBBINDING structures. Each binding
    associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
    nInputParams, eInputParameter);

    i = 0;
    // OrderStatus parameter 1
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, w_id),
    sizeof(m_txn.OrderStatus.w_id), DBTYPE_I4);

    // OrderStatus parameter 2
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, d_id),
    sizeof(m_txn.OrderStatus.d_id), DBTYPE_UI1);

    // OrderStatus parameter 3
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, c_id),
    sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

    // OrderStatus parameter 4
    SetBinding(&acInputDBBinding[i++],
    offsetof(ORDER_STATUS_DATA, c_last),
    sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

    hr = m_pIOrderStatusCommand-
    >QueryInterface(IID_IAccessor, (void **)&pIAccessor);
    if (FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
        COLEDBERR::eQueryInterface,
        "InitOrderStatusParams()");
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        nInputParams,
        acInputDBBinding,
        sizeof(ORDER_STATUS_DATA),
        &m_hOrderStatusInputAccessor,
        acInputDBBindStatus);

    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
        COLEDBERR::eCreateAccessor,
        "InitOrderStatusParams()");
    }

    m_OrderStatusExecuteParams.cParamSets = 1;
    m_OrderStatusExecuteParams.hAccessor =
    m_hOrderStatusInputAccessor;

```

```

        m_OrderStatusExecuteParams.pData =
        &m_txn.OrderStatus;

    // Now fill the binding information for
    result set 1 output columns
    InitBindings(&acOutputDBBinding[0],
    nOutputParams, eOutputColumn);

    // Binding for a rowset that may return
    more than one row.
    // Bind to offsets of the
    OL_ORDER_STATUS_DATA structure instead of
    ORDER_STATUS_DATA.
    // IRowset::GetData() will be passed
    individual array slots OL[i] to fetch the data
    // from the row set.

    i = 0;
    // OrderStatus output column 1
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_supply_w_id),
    sizeof(m_txn.OrderStatus.OL[0].ol_supply_w_id),
    DBTYPE_I4);

    // OrderStatus output column 2
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_i_id),
    sizeof(m_txn.OrderStatus.OL[0].ol_i_id),
    DBTYPE_I4);

    // OrderStatus output column 3
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_quantity),
    sizeof(m_txn.OrderStatus.OL[0].ol_quantity),
    DBTYPE_I2);

    // OrderStatus output column 4
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_amount),
    sizeof(m_txn.OrderStatus.OL[0].ol_amount),
    DBTYPE_R8);

    // OrderStatus output column 5
    SetBinding(&acOutputDBBinding[i++],
    offsetof(OL_ORDER_STATUS_DATA, ol_delivery_d),
    sizeof(m_txn.OrderStatus.OL[0].ol_delivery_d),
    DBTYPE_DBTIMESTAMP);

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(OL_ORDER_STATUS_DATA),
        &m_hOrderStatusOutputAccessor,
        acOutputDBBindStatus);

    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
        COLEDBERR::eCreateAccessor,
        "InitOrderStatusParams()");
    }

```

```

// Now fill the binding information for
result set 2 output columns
InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

i = 0;
// OrderStatus output column 1
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

// OrderStatus output column 2
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

// OrderStatus output column 3
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_first),
sizeof(m_txn.OrderStatus.c_first), DBTYPE_STR);

// OrderStatus output column 4
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_middle),
sizeof(m_txn.OrderStatus.c_middle), DBTYPE_STR);

// OrderStatus output column 5
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_entry_d),
sizeof(m_txn.OrderStatus.o_entry_d),
DBTYPE_DBTIMESTAMP);

// OrderStatus output column 7
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_carrier_id),
sizeof(m_txn.OrderStatus.o_carrier_id), DBTYPE_I2);

// OrderStatus output column 8
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_balance),
sizeof(m_txn.OrderStatus.c_balance), DBTYPE_R8);

// OrderStatus output column 9
SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_id),
sizeof(m_txn.OrderStatus.o_id), DBTYPE_I4);

hr = piAccessor->CreateAccessor(
DBACCESSOR_ROWDATA, //
cannot be optimized too because #1 accessor is
nOutputParams2,
acOutputDBBinding2,
sizeof(NEW_ORDER_DATA),
&m_hOrderStatusOutputAccessor2,
acOutputDBBindStatus2);

if (FAILED(hr))
{
ThrowError(piAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
}

```

```

}

void CTPCC_OLEDB::OrderStatus()
{
HRESULT hr;
int
iTryCount = 0;
IMultipleResults* pMultipleResults;
IRowset* pRowset;
IRowset* pRowset2;
LONG
cRows = MAX_OL_ORDER_STATUS_ITEMS; //
number of rows returned in the 1st rowset
ULONG
cRowsObtained;
HROW
rghRows[MAX_OL_ORDER_STATUS_ITEMS];
//returned row handles for the 1st result
set
HROW*
prghRows = &rghRows[0];
LONG
cRows2 = 1; // number of rows
returned in the 2nd rowset
ULONG
cRowsObtained2;
HROW
rghRows2; //returned row handle
for the 2nd result set
HROW*
prghRows2 = &rghRows2;
int
i;
long
lRowsAffected; // the number of
affected rows for a rowset

if (m_txn.OrderStatus.c_id != 0)
m_txn.OrderStatus.c_last[0] = 0;

while (TRUE)
{
try
{
// Execute the prepared
command // Ask for
IMultipleResults because it returns 2 rowsets.
hr =
m_piOrderStatusCommand->Execute(NULL,
IID_IMultipleResults, &m_OrderStatusExecuteParams,
NULL,

(IUnknown **)&pMultipleResults);
if (FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eExecute, "OrderStatus()");
}
}
}

```

```

// Get order line
results

// Get the first rowset
object
hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset);
if (FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
}

// Fetch the result row
handle(s)
hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
if (FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
}

m_txn.OrderStatus.o_ol_cnt =
(short)cRowsObtained;

// Get the data from
multiple rows in this rowset
for (i = 0; i <
m_txn.OrderStatus.o_ol_cnt; ++i)
{
// Fetch the
actual row data by handle
hr = pRowset-
>GetData(rghRows[i], m_hOrderStatusOutputAccessor,
&m_txn.OrderStatus.OL[i]);
if
(FAILED(hr))
{
ThrowError(m_piOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
}
}

// Release row(s)
hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
// Release rowset
hr = pRowset-
>Release();

```

```

////////////////////////////////////
// Get the second
rowset object

////////////////////////////////////
if
(m_txn.OrderStatus.o_ol_cnt > 0)
{
    hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset2);
if
(FAILED(hr))
{
    ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
}
// Fetch the
result row handle(s)
hr =
pRowset2->GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
if
(FAILED(hr))
{
    ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
}
// Fetch the
actual row data by handle
hr =
pRowset2->GetData(rghRows2,
m_hOrderStatusOutputAccessor2, &m_txn.OrderStatus);
if
(FAILED(hr))
{
    ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
}
// Release
row(s)
hr =
pRowset2->Release();
}
// Release the common
MultipleResults interface
hr = pMultipleResults-
>Release();
if
(m_txn.OrderStatus.o_ol_cnt == 0)
throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_NO_SUCH_ORDER
);

```

```

else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else
    m_txn.OrderStatus.exec_status_code = eOK;
break;
}
catch (COLEDBERR *e)
{
    if (!e->m_bDeadLock)
    || (++iTryCount > iMaxRetries))
        throw;
// hit deadlock;
backoff for increasingly longer period
delete e;
Sleep(10 * iTryCount);
}
}
// if (iTryCount)
// throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}
void CTPCC_OLEDB::InitDeliveryParams()
{
    int i;
    HRESULT hr;
    wchar_t
szName[IMAX_SP_NAME_LEN];
    IAccessor*
pIAccessor;
    const ULONG
nInputParams = 2; // input parameters
    const ULONG
nOutputParams = 10; // output 1st result
set columns
// Structure to bind in accessor
DBBINDING
acInputDBBinding[nInputParams];
DBBINDSTATUS
acInputDBBindStatus[nInputParams];
DBBINDING
acOutputDBBinding[nOutputParams];
DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];
// Set command text
_snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"{call %stpcc_delivery
(?,?)", m_szSPPrefix);

```

```

// Create and Prepare a new command object
for Delivery.
CreateCommand(szName,
&m_pIDeliveryCommand);
// Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);
i = 0;
// Delivery parameter 1
SetBinding(&acInputDBBinding[i++],
offsetof(DELIVERY_DATA, w_id),
sizeof(m_txn.Delivery.w_id), DBTYPE_I4);
// Delivery parameter 2
SetBinding(&acInputDBBinding[i++],
offsetof(DELIVERY_DATA, o_carrier_id),
sizeof(m_txn.Delivery.o_carrier_id), DBTYPE_I2);
hr = m_pIDeliveryCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
if (FAILED(hr))
{
    ThrowError(m_pIDeliveryCommand,
COLEDBERR::eQueryInterface, "InitDeliveryParams()");
}
hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,
nInputParams,
acInputDBBinding,
sizeof(DELIVERY_DATA),
&m_hDeliveryInputAccessor,
acInputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
}
m_DeliveryExecuteParams.cParamSets = 1;
m_DeliveryExecuteParams.hAccessor =
m_hDeliveryInputAccessor;
m_DeliveryExecuteParams.pData =
&m_txn.Delivery;
// Now fill the binding information for
result set 1 output columns
InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);
// Binding for a rowset that may return
more than one row.
for (i = 0; i < 10; ++i)
{
    // Delivery output column 1

```

```

        SetBinding(&acOutputDBBinding[i],
offsetof(DEIVERY_DATA, o_id[i]),
sizeof(m_txn.Delivery.o_id[i]), DBTYPE_I4);
    }

    hr = piAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(DEIVERY_DATA),
&m_hDeliveryOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
    }
}

void CTPCC_OLEDB::Delivery()
{
    HRESULT          hr;
    int
    iTryCount = 0;
    IRowset*         pRowset;
    LONG             cRows = 1;
    // number of rows returned in the rowset
    ULONG
    cRowsObtained;
    HROW             rgRow;
    //returned row handles
    HROW*           prghRow =
&rgRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
command
            hr =
m_pIDeliveryCommand->Execute(NULL, IID_IRowset,
&m_DeliveryExecuteParams, NULL,

            (IUnknown **)&pRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIDeliveryCommand,
COLEDBERR::eExecute, "Delivery()");
            }

            // Fetch the result row
handle(s)
            hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
            if (FAILED(hr))
            {

```

```

                ThrowError(m_pIDeliveryCommand,
COLEDBERR::eGetNextRows, "Delivery()");
            }
        }
        // Fetch the actual row
data by handle
            hr = pRowset-
>GetData(rgRow, m_hDeliveryOutputAccessor,
&m_txn.Delivery);
            if (FAILED(hr))
            {
                ThrowError(m_pIDeliveryCommand,
COLEDBERR::eGetData, "Delivery()");
            }
            // Release row(s)
            hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
            // Release rowset
            hr = pRowset-
>Release();

            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
        catch (COLEDBERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            // backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

tpcc_oledb.h
/* FILE: TPC_C_OLEDB.H
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999-2004
 * Written by
Sergey Vasilevskiy
 * All Rights Reserved
 *
 *
 *

```

```

 * PURPOSE: Header file for TPC-C txn class
OLE DB implementation.
 *
 *
 */
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

#define IMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

// Type of parameter and result set column bindings.
enum eBindingType
{
    eInputParameter,
    eOutputParameter,
    eInputOutputParameter,
    eOutputColumn
};

class COLEDBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eQueryInterface,
        // error from QueryInterface
        eCreateSession,
        eCreateCommand,
        eSetCommandText,
        eExecute,
        // = 6
        eCreateAccessor,
        ePrepare,
        eGetNextRows,
        eGetData,
        eGetResult
        // = 11
    };

    COLEDBERR(LPCTSTR szLoc)
        : CBaseErr(szLoc)
    {
        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_OLEDBErrStr = NULL;
    };

    ~COLEDBERR()
    {
        if (m_OLEDBErrStr !=
NULL)
            delete []
m_OLEDBErrStr;
    }
};

```

```

};
ACTION m_eAction;
int m_NativeError;
BOOL m_bDeadLock;
char *m_OLEDBErrStr;

int ErrorType()
{return ERR_TYPE_OLEDB;}
char* ErrorTypeStr() { return
"OLEDB"; }
int ErrorNum()
{return m_NativeError;}
char* ErrorText() {return
m_OLEDBErrStr;}
int ErrorAction()
{ return (int)m_eAction; }
};

class CTPCC_OLEDB_ERR : public CBaseErr
{
public:
enum TPCC_OLEDB_ERRS
{
ERR_WRONG_SP_VERSION =
1, // "Wrong version of stored procs on
database server"
ERR_INVALID_CUST, // "Invalid Customer id,name."
ERR_NO_SUCH_ORDER, // "No orders found for
customer."
ERR_RETRIED_TRANS, // "Retries before transaction
succeeded."
};
CTPCC_OLEDB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };
CTPCC_OLEDB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

int m_errno;
int m_iTryCount;

int ErrorType()
{return ERR_TYPE_TPCC_OLEDB;}
char* ErrorTypeStr() { return
"TPCC OLEDB"; }
int ErrorNum()
{return m_errno;}
char* ErrorText();
};

class DllDecl CTPCC_OLEDB : public CTPCC_BASE
{
private:

```

```

// declare variables and private
functions here...
BOOL m_bDeadlock; //
transaction was selected as deadlock victim
int m_MaxRetries;
// retry count on deadlock

DBPROPSET m_rgInitPropSet; //
initialization property set used to establish a
connection
DBPROP m_InitProperties[4]; //
individual initialization properties
IDBCreateSession* m_pIDBCreateSession; // session
(connection) interface
IDBCreateCommand* m_pIDBCreateCommand; // SQL
command creation interface
IMalloc* m_pIMalloc; //
// Needed to release error strings.
// StockLevel
ICommandText* m_pIStockLevelCommand;
HACCESSOR m_hStockLevelInputAccessor; // accessor
to bind input parameters
HACCESSOR m_hStockLevelOutputAccessor; // accessor
to bind output columns
DBPARAMS m_StockLevelExecuteParams; //
parameter structure for Execute
// NewOrder
// One prepared command for each
possible number of new order line items
ICommandText* m_pINewOrderCommand[MAX_OL_NEW_ORDER_ITEMS]
;
// accessors to bind input
parameters // one for each possible number
of new order line items
HACCESSOR m_hNewOrderInputAccessor[MAX_OL_NEW_ORDER_I
TEMS];
// accessor to bind output
columns of the first rowset
HACCESSOR m_hNewOrderOutputAccessor[MAX_OL_NEW_ORDER_
ITEMS];
// accessor to bind output
columns of the second rowset

```

```

HACCESSOR m_hNewOrderOutputAccessor2[MAX_OL_NEW_ORDER
_ITEMS];
// parameter structure for
Execute
DBPARAMS m_NewOrderExecuteParams[MAX_OL_NEW_ORDER_IT
EMS];
// Payment
ICommandText* m_pIPaymentCommand;
HACCESSOR m_hPaymentInputAccessor; // accessor
to bind input parameters
HACCESSOR m_hPaymentOutputAccessor; // accessor
to bind output columns
DBPARAMS m_PaymentExecuteParams; //
parameter structure for Execute
// OrderStatus
ICommandText* m_pIOrderStatusCommand;
HACCESSOR m_hOrderStatusInputAccessor; // accessor
to bind input parameters
HACCESSOR m_hOrderStatusOutputAccessor; // accessor
to bind output columns
HACCESSOR m_hOrderStatusOutputAccessor2; //
accessor to bind output columns
DBPARAMS m_OrderStatusExecuteParams; //
parameter structure for Execute
// Delivery
ICommandText* m_pIDeliveryCommand;
HACCESSOR m_hDeliveryInputAccessor; // accessor
to bind input parameters
HACCESSOR m_hDeliveryOutputAccessor; // accessor
to bind output columns
DBPARAMS m_DeliveryExecuteParams; // parameter
structure for Execute
wchar_t m_szSPPrefix[32]; // stored
procedures prefix
// new-order specific fields
int m_no_commit_flag;
void ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation );

```



```

void CheckSPVersion();

void InitNewOrderParams();
void InitPaymentParams();
void InitDeliveryParams();
void InitStockLevelParams();
void InitOrderStatusParams();

// Helper function to create and
prepare a command
void CreateCommand(wchar_t*
szSQLCommand, ICommandText** ppiCommandText);
// Helper function to prepare a
command
void PrepareCommand(ICommandText*
ppiCommand);

// Helper function to fill one
binding
// Used for both input parameter
and output column bindings
void SetBinding(DBBINDING*
pDBBinding, size_t obValue, size_t cbMaxLen, DBTYPE
wType);

// Helper function to initialize
an array of bindings
void InitBindings(DBBINDING*
pDBBindings, int iCount, eBindingType BindingType);

union
{
    NEW_ORDER_DATA
NewOrder;
    PAYMENT_DATA
Payment;
    DELIVERY_DATA
Delivery;
    STOCK_LEVEL_DATA
StockLevel;
    ORDER_STATUS_DATA
OrderStatus;
}
m_txn;

public:
    CTPCC_OLEDB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase, LPCWSTR szSPPrefix);
    ~CTPCC_OLEDB(void);

    inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
    inline PPAYMENT_DATA
BuffAddr_Payment() { return
&m_txn.Payment; };
    inline PDELIVERY_DATA
BuffAddr_Delivery() { return
&m_txn.Delivery; };

```

```

    inline PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
    inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

void NewOrder ();
void Payment ();
void Delivery ();
void StockLevel ();
void OrderStatus ();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_OLEDB* CTPCC_OLEDB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase, LPCWSTR
szSPPrefix );

typedef CTPCC_OLEDB* (TYPE_CTPCC_OLEDB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCSTR, LPCWSTR);

```

## trans.h

```

/* FILE: TRANS.H Microsoft
* TPC-C Kit Ver. 4.42.000 Copyright
* Microsoft, 2002 Copyrigh
* All Rights Reserved
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
* PURPOSE: Header file for TPC-C structure
templates.
* Change history:
* 4.42.000 - changed w_id fields
from short to long to support >32K warehouses
* 4.20.000 - updated rev number to
match kit
*/
#pragma once

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2

```

```

#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define DATETIME_LEN 30
#define CREDIT_LEN 2
#define C_DATA_LEN 250
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24

// TIMESTAMP_STRUCT is provided by the ODBC header
file sqltypes.h, but is not available
// when compiling with dlib, so redefined here.
Note: we are using the symbol "__SQLTYPES"
// (declared in sqltypes.h) as a way to determine if
TIMESTAMP_STRUCT has been declared.
#ifndef __SQLTYPES
typedef struct
{
    /* SQLSMALLINT */ short
    /* SQLSMALLINT */ month; unsigned short /*
    /* SQLSMALLINT */ day; unsigned short /*
    /* SQLSMALLINT */ hour; unsigned short /*
    /* SQLSMALLINT */ minute; unsigned short /*
    /* SQLSMALLINT */ second; unsigned long /*
    /* SQLINTEGER */ fraction;
} TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after
transaction completes
enum EXEC_STATUS
{
    eOK, // 0
    "Transaction committed."
    eInvalidItem, // 1 "Item number
is not valid."
    eDeliveryFailed // 2 "Delivery
Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    long
    ol_supply_w_id;
    long
    ol_i_id;

```

```

short
ol_quantity;

// output params
char
ol_i_name[I_NAME_LEN+1];
char
ol_brand_generic[BRAND_LEN+1];
double
ol_i_price;
double
ol_amount;
short
ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    long         c_id;
    short        o_ol_cnt;

    // output params
    EXEC_STATUS  exec_status_code;
    char        c_last[LAST_NAME_LEN+1];
    char        c_credit[CREDIT_LEN+1];
    double      c_discount;
    double      w_tax;
    double      d_tax;
    long        o_id;
    short       o_commit_flag;
    TIMESTAMP_STRUCT o_entry_d;
    short       o_all_local;
    double      total_amount;
    OL_NEW_ORDER_DATA
    OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    long          w_id;
    short        d_id;
    long         c_id;
    short        c_d_id;
    long         c_w_id;
    double       h_amount;
    char         c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS  exec_status_code;

```

```

TIMESTAMP_STRUCT  h_date;
char
w_street_1[ADDRESS_LEN+1];
char
w_street_2[ADDRESS_LEN+1];
char
w_city[ADDRESS_LEN+1];
char
w_state[STATE_LEN+1];
char
w_zip[ZIP_LEN+1];
char
d_street_1[ADDRESS_LEN+1];
char
d_street_2[ADDRESS_LEN+1];
char
d_city[ADDRESS_LEN+1];
char
d_state[STATE_LEN+1];
char
d_zip[ZIP_LEN+1];
char
c_first[FIRST_NAME_LEN+1];
char
c_middle[MIDDLE_NAME_LEN + 1];
char
c_street_1[ADDRESS_LEN+1];
char
c_street_2[ADDRESS_LEN+1];
char
c_city[ADDRESS_LEN+1];
char
c_state[STATE_LEN+1];
char
c_zip[ZIP_LEN+1];
char
c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT  c_since;
char
c_credit[CREDIT_LEN+1];
double
c_credit_lim;
double
c_discount;
double
c_balance;
char
c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long          ol_i_id;
    long          ol_supply_w_id;
    short         ol_quantity;
    double        ol_amount;
    TIMESTAMP_STRUCT  ol_delivery_d;
} OL_ORDER_STATUS_DATA;

```

```

typedef struct
{
    // input params
    long          w_id;
    short         d_id;
    long         c_id;
    char
c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS  exec_status_code;
    char
c_first[FIRST_NAME_LEN+1];
    char
c_middle[MIDDLE_NAME_LEN+1];
    double      c_balance;
    long        o_id;
    TIMESTAMP_STRUCT  o_entry_d;
    short       o_carrier_id;
    OL_ORDER_STATUS_DATA
    OL[MAX_OL_ORDER_STATUS_ITEMS];
    short       o_ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    long          w_id;
    short         o_carrier_id;

    // output params
    EXEC_STATUS  exec_status_code;
    SYSTEMTIME   queue_time;
    long         o_id[10];
    // id's of delivered
    orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery
transactions and for writing them to the delivery
server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME   queue;
    //time delivery transaction queued
    long         w_id;
    //delivery warehouse
    short        o_carrier_id;
    //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    long          w_id;
    short         d_id;
    short         threshold;

    // output params

```

```

EXEC_STATUS
exec_status_code;
long
low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

## txn\_base.h

```

/* FILE: TXN_BASE.H
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C txn class
implementation.
 *
 * Change history:
 * 4.20.000 - updated rev number to
match kit
 */

#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
BuffAddr_OrderStatus() = 0;

    virtual void NewOrder
() = 0;
    virtual void Payment
() = 0;
    virtual void Delivery
() = 0;
    virtual void StockLevel
() = 0;

```

```

virtual void OrderStatus ()
= 0;
};

```

## resource.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer
Studio generated
include file.
// Used by
tpcc_com_all.rc
//
#define IDS_PROJNAME
100
#define IDR_TPCC
101
#define IDR_NEWORDER
102
#define IDR_ORDERSTATUS
103
#define IDR_PAYMENT
104
#define IDR_STOCKLEVEL
105

// Next default values
for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
LS
#define
_APS_NEXT_RESOURCE_VALUE
E 202
#define
_APS_NEXT_COMMAND_VALUE
32768
#define
_APS_NEXT_CONTROL_VALUE
201
#define
_APS_NEXT_SYMED_VALUE
106
#endif
#endif

```

## resource.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1 101

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102

```

```

#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif

```

# Appendix B: Database Design

The TPC-C database was created with the following Transact-SQL scripts:

---

## backup.sql

---

```
-----
-- File:      BACKUP.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-----

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate, 21)

BACKUP DATABASE tpcc TO tpccback1, tpccback2, tpccback3, tpccback4, tpccback5,
tpccback6 WITH init, stats = 1

SELECT @enddate = GETDATE()
SELECT 'End date: ',
       CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO
```

---

## backupdev.sql

---

```
-----
-- File:      BACKUPDEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-----

USE master
GO

-----
-- create backup devices
-----

EXEC sp_addumpdevice 'disk','tpccback1','U:\tpccback1.dmp'
```

```
GO
EXEC sp_addumpdevice 'disk','tpccback2','V:\tpccback2.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback3','W:\tpccback3.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback4','X:\tpccback4.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback5','Y:\tpccback5.dmp'
GO
EXEC sp_addumpdevice 'disk','tpccback6','Z:\tpccback6.dmp'
GO
```

---

## createdb.sql

---

```
-----
-- File:      CREATEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-----

SET ANSI_NULL_DFLT_OFF ON
GO

USE master
GO

-----
-- Create temporary table for timing
-----
IF EXISTS( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
DROP TABLE tpcc_timer
GO

CREATE TABLE tpcc_timer
        (start_date CHAR(30),
         end_date   CHAR(30))

GO

INSERT INTO tpcc_timer VALUES(0,0)
GO

-----
-- Store starting time
-----
UPDATE tpcc_timer
SET start_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))
GO

-----
-- create main database files
-----

CREATE DATABASE tpcc
ON PRIMARY
(
        NAME           = MSSQL_tpcc_root,
        FILENAME       = 'C:\MSSQL_tpcc_root.mdf',
        SIZE           = 8MB,
        FILEGROWTH     = 0),
FILEGROUP MSSQL_stock_fg
```

```

(
    NAME = MSSQL_stock1,
    FILENAME = 'c:\tpcc\stock\stock_1\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock2,
    FILENAME = 'c:\tpcc\stock\stock_2\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock3,
    FILENAME = 'c:\tpcc\stock\stock_3\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock4,
    FILENAME = 'c:\tpcc\stock\stock_4\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock5,
    FILENAME = 'c:\tpcc\stock\stock_5\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock6,
    FILENAME = 'c:\tpcc\stock\stock_6\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock7,
    FILENAME = 'c:\tpcc\stock\stock_7\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock8,
    FILENAME = 'c:\tpcc\stock\stock_8\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock9,
    FILENAME = 'c:\tpcc\stock\stock_9\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock10,
    FILENAME = 'c:\tpcc\stock\stock_10\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock11,
    FILENAME = 'c:\tpcc\stock\stock_11\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_stock12,
    FILENAME = 'c:\tpcc\stock\stock_12\'',
    SIZE = 65100MB,
    FILEGROWTH = 0),
FILEGROUP MSSQL_ordln_fg
(
    NAME = MSSQL_ordln1,
    FILENAME = 'c:\tpcc\ordln\ordln_1\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln2,
    FILENAME = 'c:\tpcc\ordln\ordln_2\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln3,
    FILENAME = 'c:\tpcc\ordln\ordln_3\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln4,

```

```

    FILENAME = 'c:\tpcc\ordln\ordln_4\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln5,
    FILENAME = 'c:\tpcc\ordln\ordln_5\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln6,
    FILENAME = 'c:\tpcc\ordln\ordln_6\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln7,
    FILENAME = 'c:\tpcc\ordln\ordln_7\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln8,
    FILENAME = 'c:\tpcc\ordln\ordln_8\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln9,
    FILENAME = 'c:\tpcc\ordln\ordln_9\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln10,
    FILENAME = 'c:\tpcc\ordln\ordln_10\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln11,
    FILENAME = 'c:\tpcc\ordln\ordln_11\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_ordln12,
    FILENAME = 'c:\tpcc\ordln\ordln_12\'',
    SIZE = 55450MB,
    FILEGROWTH = 0),
FILEGROUP MSSQL_misc_fg
(
    NAME = MSSQL_misc1,
    FILENAME = 'c:\tpcc\misc\misc_1\'',
    SIZE = 7500MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_misc2,
    FILENAME = 'c:\tpcc\misc\misc_2\'',
    SIZE = 7500MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_misc3,
    FILENAME = 'c:\tpcc\misc\misc_3\'',
    SIZE = 7500MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_misc4,
    FILENAME = 'c:\tpcc\misc\misc_4\'',
    SIZE = 7500MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_misc5,
    FILENAME = 'c:\tpcc\misc\misc_5\'',
    SIZE = 7500MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_misc6,
    FILENAME = 'c:\tpcc\misc\misc_6\'',
    SIZE = 7500MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_misc7,
    FILENAME = 'c:\tpcc\misc\misc_7\'',

```

```

        SIZE                = 7500MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_misc8,
        FILENAME = 'c:\tpcc\misc\misc_8\'',
        SIZE                = 7500MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_misc9,
        FILENAME = 'c:\tpcc\misc\misc_9\'',
        SIZE                = 7500MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_misc10,
        FILENAME = 'c:\tpcc\misc\misc_10\'',
        SIZE                = 7500MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_misc11,
        FILENAME = 'c:\tpcc\misc\misc_11\'',
        SIZE                = 7500MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_misc12,
        FILENAME = 'c:\tpcc\misc\misc_12\'',
        SIZE                = 7500MB,
        FILEGROWTH          = 0),
FILEGROUP MSSQL_cust_fg
    (
        NAME                = MSSQL_cust1,
        FILENAME = 'c:\tpcc\cust\cust_1\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust2,
        FILENAME = 'c:\tpcc\cust\cust_2\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust3,
        FILENAME = 'c:\tpcc\cust\cust_3\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust4,
        FILENAME = 'c:\tpcc\cust\cust_4\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust5,
        FILENAME = 'c:\tpcc\cust\cust_5\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust6,
        FILENAME = 'c:\tpcc\cust\cust_6\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust7,
        FILENAME = 'c:\tpcc\cust\cust_7\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust8,
        FILENAME = 'c:\tpcc\cust\cust_8\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust9,
        FILENAME = 'c:\tpcc\cust\cust_9\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust10,
        FILENAME = 'c:\tpcc\cust\cust_10\'',
        SIZE                = 46950MB,

```

```

        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust11,
        FILENAME = 'c:\tpcc\cust\cust_11\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0),
    (
        NAME                = MSSQL_cust12,
        FILENAME = 'c:\tpcc\cust\cust_12\'',
        SIZE                = 46950MB,
        FILEGROWTH          = 0)

LOG ON
    (
        NAME                = MSSQL_tpcc_log,
        FILENAME = 'F:',
        SIZE                = 941800MB,
        FILEGROWTH          = 0)

COLLATE Latin1_General_BIN
GO

-----
-- Store ending time
-----
UPDATE tpcc_timer
SET   end_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))
GO

SELECT DATEDIFF(second,(SELECT start_date FROM tpcc_timer),(SELECT end_date FROM
tpcc_timer))
GO

-----
-- remove temporary table
-----
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
    DROP TABLE tpcc_timer
GO

dbopt1.sql
-----
--
-- File:   DBOPT1.SQL
--         Microsoft TPC-C Benchmark Kit Ver. 4.68
--         Copyright Microsoft, 2006
--
-- Sets database options for load
--
-----
USE master
GO

ALTER DATABASE tpcc SET RECOVERY BULK_LOGGED
GO

EXEC sp_dboption tpcc,'trunc. log on chkpt.',TRUE
GO

ALTER DATABASE tpcc SET TORN_PAGE_DETECTION OFF
GO

ALTER DATABASE tpcc SET PAGE_VERIFY NONE

```

```
GO
USE tpcc
GO
CHECKPOINT
GO
```

## dbopt2.sql

```
-----
-- File:      DBOPT2.SQL                      --
--           Microsoft TPC-C Benchmark Kit Ver. 4.68 --
--           Copyright Microsoft, 2006         --
--           Sets database options after load  --
-----

ALTER DATABASE tpcc SET RECOVERY FULL
GO

USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates',1
GO

RECONFIGURE WITH OVERRIDE
GO

DECLARE @msg          varchar(50)

-----
--           OPTIONS FOR SQL SERVER 2000      --
-- Set option values for user-defined indexes --
-----

SET @msg = ' '
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ' '
PRINT @msg

EXEC sp_indexoption 'customer', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'district', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'warehouse', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'stock', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'order_line', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'orders', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'new_order', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowPageLocks', FALSE
GO

Print ' '
```

```
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print ' Lockflag = 0 ==> No pre-specified hierarchy'
Print ' Lockflag = 1 ==> Lock at Page-level then Table-level'
Print ' Lockflag = 2 ==> Lock at Row-level then Table-level'
Print ' Lockflag = 3 ==> Lock at Table-level'
Print ' '
```

```
SELECT name,
lockflags
FROM sysindexes
WHERE object_id('warehouse') = id OR
object_id('district') = id OR
object_id('customer') = id OR
object_id('stock') = id OR
object_id('orders') = id OR
object_id('order_line') = id OR
object_id('history') = id OR
object_id('new_order') = id OR
object_id('item') = id
ORDER BY lockflags asc
GO
```

```
sp_configure 'allow updates',0
GO
```

```
RECONFIGURE WITH OVERRIDE
GO
```

```
EXEC sp_dboption tpcc, 'auto update statistics', FALSE
EXEC sp_dboption tpcc, 'auto create statistics', FALSE
GO
```

```
DECLARE @db_id int,
@tbl_id int
```

```
SET @db_id = DB_ID('tpcc')
SET @tbl_id = OBJECT_ID('tpcc..warehouse')
DBCC PINTABLE (@db_id, @tbl_id)
```

```
SET @tbl_id = OBJECT_ID('tpcc..district')
DBCC PINTABLE (@db_id, @tbl_id)
```

```
SET @tbl_id = OBJECT_ID('tpcc..new_order')
DBCC PINTABLE (@db_id, @tbl_id)
```

```
SET @tbl_id = OBJECT_ID('tpcc..item')
DBCC PINTABLE (@db_id, @tbl_id)
GO
```

## delivery.sql

```
-----
-- File:      DELIVERY.SQL                    --
--           Microsoft TPC-C Benchmark Kit Ver. 4.68 --
--           Copyright Microsoft, 2006         --
--           Creates delivery stored procedure  --
-----
```

```

--          Interface Level:    4.20.000          --
--          -----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO

CREATE PROC tpcc_delivery
    @w_id          int,
                @o_carrier_id  smallint
AS
DECLARE @d_id      tinyint,
        @o_id      int,
        @c_id      int,
        @total     money,
        @oid1      int,
        @oid2      int,
        @oid3      int,
        @oid4      int,
        @oid5      int,
        @oid6      int,
        @oid7      int,
        @oid8      int,
        @oid9      int,
        @oid10     int

SELECT @d_id = 0

BEGIN TRANSACTION d
    WHILE (@d_id < 10)
        BEGIN
            SELECT @d_id = @d_id + 1,
                   @total = 0,
                   @o_id = 0

            SELECT TOP 1
                @o_id = no_o_id
            FROM new_order WITH (serializable uplock)
            WHERE no_w_id = @w_id AND
                  no_d_id = @d_id
            ORDER BY no_o_id ASC

            IF (@@rowcount <> 0)
                BEGIN
                    -- claim the order for this district
                    DELETE new_order
                    WHERE no_w_id = @w_id AND
                          no_d_id = @d_id AND
                          no_o_id = @o_id

                    -- set carrier_id on this order (and get customer id)
                    UPDATE orders

```

```

SET o_carrier_id = @o_carrier_id,
    @c_id         = @o_c_id
WHERE o_w_id     = @w_id AND
      o_d_id     = @d_id AND
      o_id       = @o_id

-- set date in all lineitems for this order (and sum amounts)
UPDATE order_line
SET ol_delivery_d = GETDATE(),
    @total        = @total + ol_amount
WHERE ol_w_id    = @w_id AND
      ol_d_id    = @d_id AND
      ol_o_id    = @o_id

-- accumulate lineitem amounts for this order into customer
UPDATE customer
SET c_balance     = c_balance + @total,
    c_delivery_cnt = c_delivery_cnt + 1
WHERE c_w_id     = @w_id AND
      c_d_id     = @d_id AND
      c_id       = @c_id
END

SELECT @oid1 = CASE @d_id WHEN 1 THEN @o_id ELSE @oid1 END,
       @oid2 = CASE @d_id WHEN 2 THEN @o_id ELSE @oid2 END,
       @oid3 = CASE @d_id WHEN 3 THEN @o_id ELSE @oid3 END,
       @oid4 = CASE @d_id WHEN 4 THEN @o_id ELSE @oid4 END,
       @oid5 = CASE @d_id WHEN 5 THEN @o_id ELSE @oid5 END,
       @oid6 = CASE @d_id WHEN 6 THEN @o_id ELSE @oid6 END,
       @oid7 = CASE @d_id WHEN 7 THEN @o_id ELSE @oid7 END,
       @oid8 = CASE @d_id WHEN 8 THEN @o_id ELSE @oid8 END,
       @oid9 = CASE @d_id WHEN 9 THEN @o_id ELSE @oid9 END,
       @oid10 = CASE @d_id WHEN 10 THEN @o_id ELSE @oid10 END
END

COMMIT TRANSACTION d

-- return delivery data to client

SELECT @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

getargs.c
//          File:          GETARGS.C

```



```

//          Microsoft TPC-C Kit Ver. 4.51
//          Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003
//          Purpose: Source file for command line processing

// Includes
#include "tpcc.h"

//=====
//
// Function name: GetArgsLoader
//
//=====

void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{
    int         i;
    char        *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int) GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server      = SERVER;
    pargs->user        = USER;
    pargs->password    = PASSWORD;
    pargs->database    = DATABASE;
    pargs->batch       = BATCH;
    pargs->num_warehouses = UNDEF;
    pargs->tables_all  = TRUE;
    pargs->table_item  = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer = FALSE;
    pargs->table_orders = FALSE;
    pargs->loader_res_file = LOADER_RES_FILE;
    pargs->log_path      = LOADER_LOG_PATH;
    pargs->pack_size     = DEFLDPACKSIZE;
    pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
    pargs->build_index   = BUILD_INDEX;
    pargs->index_order   = INDEX_ORDER;
    pargs->index_script_path = INDEX_SCRIPT_PATH;
    pargs->scale_down    = SCALE_DOWN;

    /* check for zero command line args */
    if ( argc == 1 )
        GetArgsLoaderUsage();

    for ( i = 1; i < argc; ++i)
    {
        if (argv[i][0] != '-' && argv[i][0] != '/')
        {
            printf("\nUnrecognized command");
            GetArgsLoaderUsage();
            exit(1);
        }

        ptr = argv[i];

        switch (ptr[1])
        {
            case '?': /* Fall through */

```

```

GetArgsLoaderUsage();
break;

case 'D':
    pargs->database = ptr+2;
break;

case 'P':
    pargs->password = ptr+2;
break;

case 'S':
    pargs->server = ptr+2;
break;

case 'U':
    pargs->user = ptr+2;
break;

case 'b':
    pargs->batch = atol(ptr+2);
break;

case 'W':
    pargs->num_warehouses = atol(ptr+2);
break;

case 's':
    pargs->starting_warehouse = atol(ptr+2);
break;

case 't':
    {
        pargs->tables_all = FALSE;
        if (strcmp(ptr+2,"item") == 0)
            pargs->table_item =
TRUE;
        else if (strcmp(ptr+2,"warehouse")
== 0)
            pargs->table_warehouse =
TRUE;
        else if (strcmp(ptr+2,"customer")
== 0)
            pargs->table_customer =
TRUE;
        else if (strcmp(ptr+2,"orders") ==
0)
            pargs->table_orders =
TRUE;
        else
        {
            printf("\nUnrecognized command");
            GetArgsLoaderUsage();
            exit(1);
        }
        break;
    }

case 'f':
    pargs->loader_res_file = ptr+2;
break;

```

```

        case 'L':
            pargs->log_path = ptr+2;
            break;
        case 'p':
            pargs->pack_size = atol(ptr+2);
            break;
        case 'i':
            pargs->build_index = atol(ptr+2);
            break;
        case 'o':
            pargs->index_order = atol(ptr+2);
            break;
        case 'c':
            pargs->scale_down = atol(ptr+2);
            break;
        case 'd':
            pargs->index_script_path = ptr+2;
            break;
        default:
            GetArgsLoaderUsage();
            exit(-1);
            break;
    }
}

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
    printf("Number of Warehouses is required\n");
    exit(-2);
}

return;
}

//=====
//
// Function name: GetArgsLoaderUsage
//
//=====
void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

    printf("TPCCldr:\n\n");
    printf("Parameter                                Default\n");
    printf("-----");
\n");
    printf("-W Number of Warehouses to Load                Required \n");
    printf("-S Server                                           %s\n", SERVER);
    printf("-U Username                                         %s\n", USER);

```

```

        printf("-P Password                                     %s\n", PASSWORD);
        printf("-D Database                                           %s\n", DATABASE);
        printf("-b Batch Size                                           %ld\n",
(long) BATCH);
        printf("-p TDS packet size                                       %ld\n",
(long) DEFLDPACKSIZE);
        printf("-L Loader BCP Log Path                                   %s\n",
LOADER_LOG_PATH);
        printf("-f Loader Results Output Filename                 %s\n",
LOADER_RES_FILE);
        printf("-s Starting Warehouse                                   %ld\n",
(long) DEF_STARTING_WAREHOUSE);
        printf("-i Build Option (data = 0, data and index = 1) %ld\n",
(long) BUILD_INDEX);
        printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n",
(long) INDEX_ORDER);
        printf("-c Build Scaled Database (normal = 0, tiny = 1) %ld\n",
(long) SCALE_DOWN);
        printf("-d Index Script Path                                   %s\n",
INDEX_SCRIPT_PATH);
        printf("-t Table to Load                                       all tables
\n");
        printf(" [item|warehouse|customer|orders]\n");
        printf(" Notes: \n");
        printf(" - the '-t' parameter may be included multiple times to \n");
        printf(" - specify multiple tables to be loaded \n");
        printf(" - 'item' loads ITEM table \n");
        printf(" - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n");
        printf(" - 'customer' loads CUSTOMER and HISTORY tables \n");
        printf(" - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \n");

        printf("\nNote: Command line switches are case sensitive.\n");

    exit(0);
}

```

## idxcuscl.sql

```

-----
-- File: IDXCUSCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates clustered index on customer table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_cl' )
    DROP INDEX customer.customer_cl

```

```

CREATE UNIQUE CLUSTERED INDEX customer_c1 ON customer(c_w_id, c_d_id, c_id)
ON MSSQL_cust_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## idxcusnc.sql

```

-----
-- File:      IDXCUSNC.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
--          Creates non-clustered index on customer table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_nc1' )
    DROP INDEX customer.customer_nc1

CREATE UNIQUE NONCLUSTERED INDEX customer_nc1 ON customer(c_w_id, c_d_id, c_last,
c_first, c_id)
ON MSSQL_cust_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## idxdiscl.sql

```

-----
-- File:      IDXDISCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
--          Creates clustered index on district table
-----
USE tpcc
GO

```

```

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'district_c1' )
    DROP INDEX district.district_c1

CREATE UNIQUE CLUSTERED INDEX district_c1 ON district(d_w_id, d_id)
WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## idxhiscl.sql

```

-----
-- File:      IDXHISCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
--          Creates clustered index on history table
--
--          CAUTION: This index is only beneficial for systems
--          CAUTION: with 8 or more processors.
--          CAUTION: It may negatively impact performance on
--          CAUTION: systems with less than 8 processors.
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'history_c1' )
    DROP INDEX history.history_c1

CREATE UNIQUE CLUSTERED INDEX history_c1 ON history(h_c_w_id, h_date, h_c_d_id,
h_c_id, h_amount)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## idxitmcl.sql

```
-----
--
-- File:      IDXITMCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates clustered index on item table
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'item_c1' )
  DROP INDEX item.item_c1

CREATE UNIQUE CLUSTERED INDEX item_c1 ON item(i_id)
  ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

## idxnodcl.sql

```
-----
--
-- File:      IDXNODCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates clustered index on new-order table
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'new_order_c1' )
  DROP INDEX new_order.new_order_c1
```

```
CREATE UNIQUE CLUSTERED INDEX new_order_c1 ON new_order(no_w_id, no_d_id, no_o_id)
  ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

## idxodlcl.sql

```
-----
--
-- File:      IDXODLCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates clustered index on order-line table
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'order_line_c1' )
  DROP INDEX order_line.order_line_c1

CREATE UNIQUE CLUSTERED INDEX order_line_c1 ON order_line(ol_w_id, ol_d_id, ol_o_id,
ol_number)
  ON MSSQL_ordln_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

## idxordcl.sql

```
-----
--
-- File:      IDXORDCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates clustered index on orders table
--
-----
USE tpcc
```

```

GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'orders_cl' )
    DROP INDEX orders.orders_cl

CREATE UNIQUE CLUSTERED INDEX orders_cl ON orders(o_w_id, o_d_id, o_id)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## idxordnc.sql

```

-----
-- File:      IDXORDNC.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
--          Creates non-clustered index on orders table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'orders_nc1' )
    DROP INDEX orders.orders_nc1

CREATE INDEX orders_nc1 ON orders(o_w_id, o_d_id, o_c_id, o_id)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## idxstkcl.sql

```

--
-- File:      IDXSTKCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
--          Creates clustered index on stock table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'stock_cl' )
    DROP INDEX stock.stock_cl

CREATE UNIQUE CLUSTERED INDEX stock_cl ON stock(s_i_id, s_w_id)
    ON MSSQL_stock_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

## idxwarcl.sql

```

-----
-- File:      IDXWARCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
--          Creates clustered index on warehouse table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'warehouse_cl' )
    DROP INDEX warehouse.warehouse_cl

CREATE UNIQUE CLUSTERED INDEX warehouse_cl ON warehouse(w_id)
    WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',

```

```

        CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
        DATEDIFF(second, @startdate, @enddate)
GO

```

## NewOrd.sql

```

-----
--
-- File:      NEWORD.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates neworder stored procedure
--
-- Interface Level:   4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO

CREATE PROCEDURE      tpcc_neworder
        @w_id          int,
        @d_id          tinyint,
        @c_id          int,
        @o_ol_cnt      tinyint,
        @o_all_local   tinyint,
        @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
        @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
        @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
        @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
        @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
        @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
        @i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
        @i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
        @i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
        @i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
        @i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
        @i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
        @i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
        @i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
        @i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
DECLARE @w_tax          smallmoney,
        @d_tax          smallmoney,
        @c_last         char(16),
        @c_credit        char(2),
        @c_discount     smallmoney,

```

```

        @i_price         smallmoney,
        @i_name          char(24),
        @i_data          char(50),
        @o_entry_d       datetime,
        @remote_flag     int,
        @s_quantity      smallint,
        @s_data          char(50),
        @s_dist          char(24),
        @li_no           int,
        @o_id            int,
        @commit_flag     tinyint,
        @li_id           int,
        @li_s_w_id       int,
        @li_qty           smallint,
        @ol_number       int,
        @c_id_local      int

```

BEGIN

BEGIN TRANSACTION n

```

-----
-- get district tax and next available order id and update
-- plus initialize local variables
-----

```

```

UPDATE district
SET      @d_tax          = d_tax,
        @o_id            = d_next_o_id,
        d_next_o_id     = d_next_o_id + 1,
        @o_entry_d       = GETDATE(),
        @li_no           = 0,
        @commit_flag     = 1
WHERE    d_w_id          = @w_id AND
        d_id             = @d_id

```

```

-----
-- process orderlines
-----

```

```

WHILE (@li_no < @o_ol_cnt)
BEGIN
    SELECT @li_no = @li_no + 1

```

```

-----
-- set i_id, s_w_id, and qty for this lineitem
-----

```

```

SELECT @li_id = CASE @li_no
        WHEN 1 THEN @i_id1
        WHEN 2 THEN @i_id2
        WHEN 3 THEN @i_id3
        WHEN 4 THEN @i_id4
        WHEN 5 THEN @i_id5
        WHEN 6 THEN @i_id6
        WHEN 7 THEN @i_id7
        WHEN 8 THEN @i_id8
        WHEN 9 THEN @i_id9
        WHEN 10 THEN @i_id10
        WHEN 11 THEN @i_id11
        WHEN 12 THEN @i_id12
        WHEN 13 THEN @i_id13
        WHEN 14 THEN @i_id14
        WHEN 15 THEN @i_id15
END,

```

```

@li_s_w_id = CASE @li_no
    WHEN 1 THEN @s_w_id1
    WHEN 2 THEN @s_w_id2
    WHEN 3 THEN @s_w_id3
    WHEN 4 THEN @s_w_id4
    WHEN 5 THEN @s_w_id5
    WHEN 6 THEN @s_w_id6
    WHEN 7 THEN @s_w_id7
    WHEN 8 THEN @s_w_id8
    WHEN 9 THEN @s_w_id9
    WHEN 10 THEN @s_w_id10
    WHEN 11 THEN @s_w_id11
    WHEN 12 THEN @s_w_id12
    WHEN 13 THEN @s_w_id13
    WHEN 14 THEN @s_w_id14
    WHEN 15 THEN @s_w_id15
END,

@li_qty = CASE @li_no
    WHEN 1 THEN @ol_qty1
    WHEN 2 THEN @ol_qty2
    WHEN 3 THEN @ol_qty3
    WHEN 4 THEN @ol_qty4
    WHEN 5 THEN @ol_qty5
    WHEN 6 THEN @ol_qty6
    WHEN 7 THEN @ol_qty7
    WHEN 8 THEN @ol_qty8
    WHEN 9 THEN @ol_qty9
    WHEN 10 THEN @ol_qty10
    WHEN 11 THEN @ol_qty11
    WHEN 12 THEN @ol_qty12
    WHEN 13 THEN @ol_qty13
    WHEN 14 THEN @ol_qty14
    WHEN 15 THEN @ol_qty15
END

-----
-- get item data (no one updates item)
-----
SELECT @i_price = i_price,
       @i_name   = i_name,
       @i_data   = i_data
FROM   item WITH (repeatableread)
WHERE  i_id      = @li_id

-----
-- update stock values
-----
UPDATE stock
SET    s_ytd      = s_ytd + @li_qty,
       @s_quantity = s_quantity - @li_qty +
           CASE WHEN (s_quantity - @li_qty < 10) THEN 91
ELSE 0 END,
       s_order_cnt = s_order_cnt + 1,
       s_remote_cnt = s_remote_cnt +
           CASE WHEN (@li_s_w_id = @w_id) THEN 0 ELSE 1
END,
       @s_data     = s_data,
       @s_dist     = CASE @d_id
           WHEN 1 THEN s_dist_01
           WHEN 2 THEN s_dist_02
           WHEN 3 THEN s_dist_03
           WHEN 4 THEN s_dist_04

```

```

           WHEN 5 THEN s_dist_05
           WHEN 6 THEN s_dist_06
           WHEN 7 THEN s_dist_07
           WHEN 8 THEN s_dist_08
           WHEN 9 THEN s_dist_09
           WHEN 10 THEN s_dist_10
       END
WHERE  s_i_id     = @li_id AND
       s_w_id     = @li_s_w_id

-----
-- if there actually is a stock (and item) with these ids, go to work
-----
IF (@@rowcount > 0)
BEGIN
-----
-- insert order_line data (using data from item and stock)
-----
INSERT INTO order_line VALUES( @o_id,
                                @d_id,
                                @w_id,
                                @li_no,
                                @li_id,
                                'dec 31, 1899',
                                @i_price * @li_qty,
                                @li_s_w_id,
                                @li_qty,
                                @s_dist)

-----
-- send line-item data to client
-----
SELECT @i_name,
       @s_quantity,
       b_g = CASE WHEN ( (patindex('%ORIGINAL%',@i_data) > 0) AND
(patindex('%ORIGINAL%',@s_data) > 0) )
           THEN 'B' ELSE 'G' END,
       @i_price,
       @i_price * @li_qty
END
ELSE
BEGIN
-----
-- no item (or stock) found - triggers rollback condition
-----
SELECT '',0, '',0,0
SELECT @commit_flag = 0
END

-----
-- get customer last name, discount, and credit rating
-----
SELECT @c_last = c_last,
       @c_discount = c_discount,
       @c_credit = c_credit,
       @c_id_local = c_id
FROM   customer WITH (repeatableread)
WHERE  c_id      = @c_id AND
       c_w_id    = @w_id AND
       c_d_id    = @d_id

```

```

-- insert fresh row into orders table
-----
INSERT INTO orders VALUES ( @o_id,
                             @d_id,
                             @w_id,
                             @c_id_local,
                             0,
                             @o_ol_cnt,
                             @o_all_local,
                             @o_entry_d)

-----
-- insert corresponding row into new-order table
-----
INSERT INTO new_order VALUES ( @o_id,
                                @d_id,
                                @w_id)

-----
-- select warehouse tax
-----
SELECT @w_tax = w_tax
FROM   warehouse WITH (repeatableread)
WHERE  w_id = @w_id

IF (@commit_flag = 1)
    COMMIT TRANSACTION n
ELSE
-----
-- all that work for nuthin!!!
-----
ROLLBACK TRANSACTION n

-----
-- return order data to client
-----
SELECT @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag
END
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

## null-txns.sql

```

-----
-- File:  NULL-TXNS.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-----

```

```

--
-- This script will create stored procs which
-- accept the same parameters and return correctly
-- formed results sets to match the standard TPC-C
-- stored procs. Of course, the advantage is that
-- these stored procs place almost no load on
-- SQL Server and do not require a database.
--
-- Interface Level: 4.10.000
--
-----
USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
    DROP PROCEDURE tpcc_payment
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
    DROP PROCEDURE tpcc_stocklevel
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_version' )
    DROP PROCEDURE tpcc_version
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'order_line_null' )
    DROP PROCEDURE order_line_null
GO

CREATE PROCEDURE tpcc_delivery
    @w_id int,
    @o_carrier_id smallint
AS
DECLARE @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
        @oid3 int,
        @oid4 int,
        @oid5 int,
        @oid6 int,
        @oid7 int,
        @oid8 int,
        @oid9 int,
        @oid10 int,
        @delaytime varchar(30)
-----
-- uniform random delay of 0 - 1 second; avg = 0.50
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*1.00) AS decimal(4,3)) AS
char(5))

```



```

WAITFOR delay @delaytime

SELECT 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001
GO

CREATE PROCEDURE tpcc_neworder
    @w_id int,
    @d_id tinyint,
    @c_id int,
    @o_ol_cnt tinyint,
    @o_all_local tinyint,
    @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
    @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
    @i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
    @i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
    @i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
    @i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
    @i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
    @i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
    @i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
DECLARE @w_tax numeric(4,4),
        @d_tax numeric(4,4),
        @c_last char(16),
        @c_credit char(2),
        @c_discount numeric(4,4),
        @i_price numeric(5,2),
        @i_name char(24),
        @o_entry_d datetime,
        @li_no int,
        @o_id int,
        @commit_flag tinyint,
        @li_id int,
        @li_qty smallint,
        @delaytime varchar(30)

BEGIN
    -----
    -- uniform random delay of 0 - 0.6 second; avg = 0.3
    -----
    SELECT @delaytime = '00:00:0' + CAST(CAST((RAND())*0.60) AS decimal(4,3)) AS
char(5))

    WAITFOR delay @delaytime

    -----
    -- process orderlines
    -----
    SELECT @commit_flag = 1,
           @li_no = 0

    WHILE (@li_no < @o_ol_cnt)
    BEGIN
        SELECT @li_id = CASE @li_no

```

```

        WHEN 1 THEN @i_id1
        WHEN 2 THEN @i_id2
        WHEN 3 THEN @i_id3
        WHEN 4 THEN @i_id4
        WHEN 5 THEN @i_id5
        WHEN 6 THEN @i_id6
        WHEN 7 THEN @i_id7
        WHEN 8 THEN @i_id8
        WHEN 9 THEN @i_id9
        WHEN 10 THEN @i_id10
        WHEN 11 THEN @i_id11
        WHEN 12 THEN @i_id12
        WHEN 13 THEN @i_id13
        WHEN 14 THEN @i_id14
        WHEN 15 THEN @i_id15
    END

    SELECT @li_no = @li_no + 1

    SELECT @i_price = 23.45, @li_qty = @li_no

    IF (@li_id = 999999)
    BEGIN
        SELECT '',0,0

        SELECT @commit_flag = 0
    END
    ELSE
    BEGIN
        SELECT 'Item Name blah',
               17,
               'G',
               @i_price,
               @i_price * @li_qty
    END
END

-----
-- return order data to client
-----
SELECT @w_tax = 0.1234,
       @d_tax = 0.0987,
       @o_id = 3001,
       @c_last = 'BAROUGHTABLE',
       @c_discount = 0.2198,
       @c_credit = 'GC',
       @o_entry_d = GETDATE()

SELECT @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag

END
GO

CREATE PROCEDURE tpcc_orderstatus
    @w_id int,

```

```

                @d_id      tinyint,
                @c_id      int,
                @c_last    char(16) = ''

AS
DECLARE @c_balance    numeric(12,2),
        @c_first     char(16),
        @c_middle    char(2),
        @o_id        int,
        @o_entry_d   datetime,
        @o_carrier_id smallint,
        @ol_cnt      smallint,
        @delaytime   varchar(30)

-----
-- uniform random delay of 0 - 0.2 second: avg = 0.1
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT @c_id      = 113,
        @c_balance = -10.00,
        @c_first  = '8YCodgytqCj8',
        @c_middle = 'OE',
        @c_last   = 'OUGHTOUGHTABLE',
        @o_id     = 3456,
        @o_entry_d = GETDATE(),
        @o_carrier_id = 1

SELECT @ol_cnt = (RAND() * 11) + 5

SET ROWCOUNT @ol_cnt

SELECT ol_supply_w_id,
        ol_i_id,
        ol_quantity,
        ol_amount,
        ol_delivery_d
FROM   order_line_null

SELECT @c_id,
        @c_last,
        @c_first,
        @c_middle,
        @o_entry_d,
        @o_carrier_id,
        @c_balance,
        @o_id

GO

CREATE PROCEDURE tpcc_payment
        @w_id      int,
        @c_w_id   int,
        @h_amount  numeric(6,2),
        @d_id     tinyint,
        @c_d_id   tinyint,
        @c_id     int,
        @c_last   char(16) = ''

AS

```

```

DECLARE @w_street_1  char(20),
        @w_street_2  char(20),
        @w_city      char(20),
        @w_state     char(2),
        @w_zip       char(9),
        @w_name      char(10),
        @d_street_1  char(20),
        @d_street_2  char(20),
        @d_city      char(20),
        @d_state     char(2),
        @d_zip       char(9),
        @d_name      char(10),
        @c_first     char(16),
        @c_middle    char(2),
        @c_street_1  char(20),
        @c_street_2  char(20),
        @c_city      char(20),
        @c_state     char(2),
        @c_zip       char(9),
        @c_phone     char(16),
        @c_since     datetime,
        @c_credit    char(2),
        @c_credit_lim numeric(12,2),
        @c_balance   numeric(12,2),
        @c_discount  numeric(4,4),
        @data        char(500),
        @c_data      char(500),
        @datetime    datetime,
        @w_ytd       numeric(12,2),
        @d_ytd       numeric(12,2),
        @cnt         smallint,
        @val         smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local  int,
        @c_id_local  int,
        @delaytime   varchar(30)

-----
-- uniform random delay of 0 - 0.3 second: avg = 0.15
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT @screen_data = ''

-----
-- get customer info and update balances
-----
SELECT @d_street_1 = 'rqSHHakqyV',
        @d_street_2 = 'zZ98nW3BR2s',
        @d_city     = 'ArNr4GNFV9',
        @d_state    = 'aV',
        @d_zip      = '453511111'

-----
-- get warehouse data and update year-to-date
-----
SELECT @w_street_1 = 'rqSHHakqyV',
        @w_street_2 = 'zZ98nW3BR2s',
        @w_city     = 'ArNr4GNFV9',

```

```

        @w_state = 'aV',
        @w_zip   = '453511111'

SELECT @c_id      = 123,
       @c_balance = -10000.00,
       @c_first   = 'KmR03Xureb',
       @c_middle  = 'OE',
       @c_last    = 'BAROUGHTBAR',
       @c_street_1 = 'QpGdOHjv8mR9vNI8V',
       @c_street_2 = 'dzKoCObBqbC3yu',
       @c_city     = 'zAKZXdc037FQxq',
       @c_state    = 'QA',
       @c_zip      = '700311111',
       @c_phone    = '2967264064528555',
       @c_credit   = 'GC',
       @c_credit_lim = 50000.00,
       @c_discount = 0.3069,
       @c_since    = GETDATE(),
       @datetime   = GETDATE()

-----
-- return data to client
-----
SELECT @c_id,
       @c_last,
       @datetime,
       @w_street_1,
       @w_street_2,
       @w_city,
       @w_state,
       @w_zip,
       @d_street_1,
       @d_street_2,
       @d_city,
       @d_state,
       @d_zip,
       @c_first,
       @c_middle,
       @c_street_1,
       @c_street_2,
       @c_city,
       @c_state,
       @c_zip,
       @c_phone,
       @c_since,
       @c_credit,
       @c_credit_lim,
       @c_discount,
       @c_balance,
       @screen_data

GO

CREATE PROCEDURE tpcc_stocklevel
    @w_id int,
    @d_id tinyint,
    @threshold smallint

AS
DECLARE @delaytime varchar(30)

-----
-- uniform random delay of 0 - 3.6 second: avg = 1.8
-----

```

```

SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT 49
GO

CREATE PROCEDURE tpcc_version

AS
DECLARE @version char(8)

BEGIN
    SELECT @version = '4.10.000'

    SELECT @version AS 'Version'
END
GO

CREATE TABLE order_line_null (
    [ol_i_id] [int] NOT NULL ,
    [ol_supply_w_id] [int] NOT NULL ,
    [ol_delivery_d] [datetime] NOT NULL ,
    [ol_quantity] [smallint] NOT NULL ,
    [ol_amount] [numeric](6, 2) NOT NULL
) ON [PRIMARY]
GO

INSERT INTO order_line_null VALUES ( 101, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 102, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 103, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 104, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 105, 1, GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 106, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 107, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 108, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 109, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 110, 1, GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 111, 1, GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 112, 1, GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 113, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 114, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 115, 1, GETDATE(), 5, 123.45 )
GO

```

## ordstat.sql

```

-----
-- File: ORDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates order status stored procedure
--
-- Interface Level: 4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF

```

```

GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO

CREATE PROCEDURE    tpcc_orderstatus
                   @w_id      int,
                   @d_id      tinyint,

                   @c_id      int,
                   @c_last    char(16) = ''

AS
DECLARE @c_balance    money,
        @c_first      char(16),
        @c_middle     char(2),
        @o_id         int,
        @o_entry_d    datetime,
        @o_carrier_id smallint,
        @cnt          smallint

BEGIN TRANSACTION o
IF (@c_id = 0)
BEGIN
    -----
    -- get customer id and info using last name
    -----
    SELECT @cnt = (count(*)+1)/2
    FROM   customer WITH (repeatableread)
    WHERE  c_last = @c_last AND
           c_w_id = @w_id AND
           c_d_id = @d_id

    SET    rowcount @cnt

    SELECT @c_id      = c_id,
           @c_balance = c_balance,
           @c_first   = c_first,
           @c_last    = c_last,
           @c_middle  = c_middle
    FROM   customer WITH (repeatableread)
    WHERE  c_last = @c_last AND
           c_w_id = @w_id AND
           c_d_id = @d_id
    ORDER BY c_w_id, c_d_id, c_last, c_first

    SET rowcount 0
END
ELSE
BEGIN
    -----
    -- get customer info if by id
    -----
    SELECT @c_balance = c_balance,
           @c_first   = c_first,
           @c_middle  = c_middle,

```

```

           @c_last    = c_last
    FROM   customer WITH (repeatableread)
    WHERE  c_id      = @c_id AND
           c_d_id    = @d_id AND
           c_w_id    = @w_id

    SELECT @cnt      = @@rowcount
END

-----
-- if no such customer
-----
IF (@cnt = 0)
BEGIN
    RAISERROR('Customer not found',18,1)
    GOTO custnotfound
END

-----
-- get order info
-----
SELECT @o_id      = o_id,
       @o_entry_d = o_entry_d,
       @o_carrier_id = o_carrier_id
FROM   orders WITH (serializable)
WHERE  o_c_id     = @c_id AND
       o_d_id     = @d_id AND
       o_w_id     = @w_id
ORDER  BY o_id ASC

-----
-- select order lines for the current order
-----
SELECT ol_supply_w_id,
       ol_i_id,
       ol_quantity,
       ol_amount,
       ol_delivery_d
FROM   order_line WITH (repeatableread)
WHERE  ol_o_id = @o_id AND
       ol_d_id = @d_id AND
       ol_w_id = @w_id

custnotfound:

COMMIT TRANSACTION o

-----
-- return data to client
-----
SELECT @c_id,
       @c_last,
       @c_first,
       @c_middle,
       @o_entry_d,
       @o_carrier_id,
       @c_balance,
       @o_id

GO

```

## payment.sql

```
-----
--
-- File:      PAYMENT.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.68
--           Copyright Microsoft, 2006
--
--           Creates payment stored procedure
--
--           Interface Level:      4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
    DROP PROCEDURE tpcc_payment
GO

CREATE PROCEDURE      tpcc_payment
    @w_id      int,
    @c_w_id    int,
    @h_amount  smallmoney,
    @d_id      tinyint,
    @c_d_id    tinyint,
    @c_id      int,
    @c_last    char(16) = ""

AS
DECLARE @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city      char(20),
        @w_state     char(2),
        @w_zip       char(9),
        @w_name      char(10),
        @d_street_1  char(20),
        @d_street_2  char(20),
        @d_city      char(20),
        @d_state     char(2),
        @d_zip       char(9),
        @d_name      char(10),
        @c_first     char(16),
        @c_middle    char(2),
        @c_street_1  char(20),
        @c_street_2  char(20),
        @c_city      char(20),
        @c_state     char(2),
        @c_zip       char(9),
        @c_phone     char(16),
        @c_since     datetime,
        @c_credit    char(2),
        @c_credit_lim money,
        @c_balance   money,
        @c_discount  smallmoney,
```

```
@c_data      char(42),
@datetime    datetime,
@w_ytd       money,
@d_ytd       money,
@cnt         smallint,
@val         smallint,
@screen_data char(200),
@d_id_local  tinyint,
@w_id_local  int,
@c_id_local  int

SELECT @screen_data = ""

BEGIN TRANSACTION p
-- get payment date
SELECT @datetime = GETDATE()

IF (@c_id = 0)
BEGIN
-- get customer id and info using last name
SELECT @cnt = COUNT(*)
FROM customer WITH (repeatableread)
WHERE c_last = @c_last AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id

SELECT @val = (@cnt + 1) / 2

SET rowcount @val

SELECT @c_id = c_id
FROM customer WITH (repeatableread)
WHERE c_last = @c_last AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id

ORDER BY c_last, c_first

SET rowcount 0

END

-- get customer info and update balances
UPDATE customer
SET @c_balance = c_balance - @h_amount,
    c_payment_cnt = c_payment_cnt + 1,
    c_ytd_payment = c_ytd_payment + @h_amount,
    @c_first = c_first,
    @c_middle = c_middle,
    @c_last = c_last,
    @c_street_1 = c_street_1,
    @c_street_2 = c_street_2,
    @c_city = c_city,
    @c_state = c_state,
    @c_zip = c_zip,
    @c_phone = c_phone,
    @c_credit = c_credit,
    @c_credit_lim = c_credit_lim,
    @c_discount = c_discount,
    @c_since = c_since,
    @c_id_local = c_id
WHERE c_id = @c_id AND
      c_w_id = @c_w_id AND
      c_d_id = @c_d_id
```

```

-- if customer has bad credit get some more info
IF (@c_credit = "BC")
BEGIN
--      compute new info
SELECT  @c_data =      convert(char(5),@c_id) +
                    convert(char(4),@c_d_id) +
                    convert(char(5),@c_w_id) +
                    convert(char(4),@d_id) +
                    convert(char(5),@w_id) +
                    convert(char(19),@h_amount)

--      update customer info
UPDATE  customer
SET     c_data      = @c_data + substring(c_data, 1, 458),
       @screen_data = @c_data + substring(c_data, 1, 158)

WHERE   c_id        = @c_id AND
       c_w_id       = @c_w_id AND
       c_d_id       = @c_d_id
END

-- get district data and update year-to-date
UPDATE  district
SET     d_ytd       = d_ytd + @h_amount,
       @d_street_1 = d_street_1,
       @d_street_2 = d_street_2,
       @d_city      = d_city,
       @d_state     = d_state,
       @d_zip       = d_zip,
       @d_name      = d_name,
       @d_id_local  = d_id
WHERE   d_w_id      = @w_id AND
       d_id         = @d_id

-- get warehouse data and update year-to-date
UPDATE  warehouse
SET     w_ytd       = w_ytd + @h_amount,
       @w_street_1 = w_street_1,
       @w_street_2 = w_street_2,
       @w_city     = w_city,
       @w_state    = w_state,
       @w_zip      = w_zip,
       @w_name     = w_name,
       @w_id_local = w_id
WHERE   w_id        = @w_id

-- create history record
INSERT INTO      history VALUES (@c_id_local,
                                @c_d_id,
                                @c_w_id,
                                @d_id_local,
                                @w_id_local,
                                @datetime,
                                @h_amount,
                                @w_name + ' ' + @d_name)

COMMIT TRANSACTION p

-- return data to client
SELECT  @c_id,
       @c_last,
       @datetime,

```

```

@w_street_1,
@w_street_2,
@w_city,
@w_state,
@w_zip,
@d_street_1,
@d_street_2,
@d_city,
@d_state,
@d_zip,
@c_first,
@c_middle,
@c_street_1,
@c_street_2,
@c_city,
@c_state,
@c_zip,
@c_phone,
@c_since,
@c_credit,
@c_credit_lim,
@c_discount,
@c_balance,
@screen_data

GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

---

## random.c

---

```

//      File:                RANDOM.C
//
//      Microsoft TPC-C Kit Ver. 4.62
//      Copyright Microsoft, 1996, 1997, 1998, 1999,
//      2000, 2001, 2002, 2005
//      Purpose: Random number generation routines for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A      16807
#define M      2147483647
#define Q      127773      /* M div A */
#define R      2836       /* M mod A */
#define Thread __declspec(thread)

// Globals
long      Thread Seed = 0;      /* thread local seed */

/*****
 *
 * random -
 *      Implements a GOOD pseudo random number generator. This generator
 *      will/should? run the complete period before repeating.
 *
 *****/

```

```

*
* Copied from:
* Random Numbers Generators: Good Ones Are Hard to Find.
* Communications of the ACM - October 1988 Volume 31 Number 10
*
* Machine Dependencies:
* long must be 2 ^ 31 - 1 or greater.
*
*****/
/*****
* seed - load the Seed value used in irand and drand. Should be used before *
* first call to irand or drand.
*
*****/

void seed(long val)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n",Seed, val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

/*****
*
* irand - returns a 32 bit integer pseudo random number with a period of
* 1 to 2 ^ 32 - 1.
*
* parameters:
* none.
*
* returns:
* 32 bit integer - defined as long ( see above ).
*
* side effects:
* seed get recomputed.
*
*****/

long irand()
{
    register long s; /* copy of seed */
    register long test; /* test flag */
    register long hi; /* tmp value for speed */
    register long lo; /* tmp value for speed */

#ifdef DEBUG
    printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )

```

```

        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

/*****
*
* drand - returns a double pseudo random number between 0.0 and 1.0.
* See irand.
*
*****/
double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0);
}

//=====
// Function : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96
perf enhancement */

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
        (int) GetCurrentThreadId(), lower, upper,
        rand_num);
#endif

    return rand_num;
}

#if 0
//Original code pgd 08/13/96

```

```

long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper - lower :
upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
          (int) GetCurrentThreadId(), lower, upper,
rand_num);
#endif

    return rand_num;
}
#endif

//=====
// Function   : NURand
//
// Description:
//=====
long NURand(int iConst,
           long x,
           long y,
           long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int) GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1))+x;

#ifdef DEBUG
    printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(), rand_num);
#endif

    return rand_num;
}

```

---

## removedb.sql

---

```

--
-- File:   REMOVEDB.SQL
--         Microsoft TPC-C Benchmark Kit Ver. 4.68
--         Copyright Microsoft, 2006
--
-----
USE master
GO

-----
-- remove any existing database and backup files
-----
EXEC sp_dbrremove tpcc, dropdev
GO

EXEC sp_dropdevice 'tpccback1'
EXEC sp_dropdevice 'tpccback2'
EXEC sp_dropdevice 'tpccback3'
EXEC sp_dropdevice 'tpccback4'
EXEC sp_dropdevice 'tpccback5'
EXEC sp_dropdevice 'tpccback6'
GO

```

---

## restore.sql

---

```

--
-- File:   RESTORE.SQL
--         Microsoft TPC-C Benchmark Kit Ver. 4.68
--         Copyright Microsoft, 2006
--
-----
DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate, 21)

restore DATABASE tpcc FROM tpccback1, tpccback2, tpccback3, tpccback4, tpccback5,
tpccback6 WITH replace, stats = 1

SELECT @enddate = GETDATE()
SELECT 'End date: ',
       CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

use tpcc
go
drop index orders.orders_nc1
go

```



## RunSQLCfg.sql

```
-----
-- File:      RUNSQLCFG.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Sets suggested runtime server configuration
-- parameters
--
-----
EXEC sp_configure 'show advanced option', 1
GO

RECONFIGURE WITH OVERRIDE
GO

-----
-- change this value to approximately the number of connected users
-----
EXEC sp_configure 'max worker threads',255

-----
-- increase priority of user threads
-----
EXEC sp_configure 'priority boost',1

-----
-- disable automatic checkpointing
-----
EXEC sp_configure 'recovery interval',32767

-----
-- change to a mask appropriate for the number of processors on the server
-----
EXEC sp_configure 'affinity mask',0xf

-----
-- enable fibers
-----
EXEC sp_configure 'lightweight pooling',1
GO

RECONFIGURE WITH OVERRIDE
GO
```

## sqlshutdown.sql

```
-----
-- File:      SQLSHUTDOWN.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Checkpoints tpcc database and issues a shutdown
--
-----
USE tpcc
```

```
GO

CHECKPOINT
GO

SHUTDOWN
GO
```

## StockLev.sql

```
-----
-- File:      STOCKLEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates stock level stored procedure
--
-- Interface Level: 4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
    DROP PROCEDURE tpcc_stocklevel
GO

CREATE PROCEDURE tpcc_stocklevel
    @w_id int,
    @d_id tinyint,
    @threshold smallint

AS
DECLARE @o_id_low int,
        @o_id_high int

SELECT @o_id_low = (d_next_o_id - 20),
       @o_id_high = (d_next_o_id - 1)
FROM district
WHERE d_w_id = @w_id AND
      d_id = @d_id

SELECT COUNT(DISTINCT(s_i_id))
FROM stock,
      order_line
WHERE ol_w_id = @w_id AND
      ol_d_id = @d_id and
      ol_o_id BETWEEN @o_id_low AND
                  @o_id_high AND
      s_w_id = ol_w_id AND
      s_i_id = ol_i_id AND
      s_quantity < @threshold

OPTION(ORDER GROUP)
```

```

GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

## strings.c

```

//      File:          STRINGS.C
//
//      Microsoft TPC-C Kit Ver. 4.51
//      Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003
//      Purpose:      Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
//
// Function name: MakeAddress
//
//=====

void MakeAddress(char *street_1,
                char *street_2,
                char *city,
                char *state,
                char *zip)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString ( 2,  2, STATE_LEN, state);
    MakeZipNumberString( 9,  9, ZIP_LEN, zip);

#ifdef DEBUG
    printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state: %s,
zip: %s\n",
                (int) GetCurrentThreadId(), street_1, street_2, city,
state, zip);
#endif

    return;
}

//=====
//
// Function name: LastName

```

```

//
//=====

void LastName(int num,
             char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT" , "ABLE" , "PRI" , "PRES",
        "ESE" , "ANTI" , "CALLY" , "ATION", "EING"
    };

#ifdef DEBUG
    printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
        exit(-1);
    }

#ifdef DEBUG
    printf("[%ld]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
                (int) GetCurrentThreadId(), num, num/100, (num/10)%10,
num%10);
    printf("[%ld]DBG: LastName: String = %s\n", (int) GetCurrentThreadId(),
name);
#endif

    return;
}

//=====
//
// Function name: MakeAlphaString
//
//=====

//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a minimum

```

```

//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
//-CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    str[len] = 0;

    return len;
}

int MakeAlphaStringPadded( int minLen, int maxLen, int padLen, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaStringPadded()\n", (int)
GetCurrentThreadId());
#endif

    len= RandomNumber(minLen, maxLen);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    if (len < padLen)
        memset(str+len, ' ', padLen - len);
    str[padLen] = 0;
    return padLen;
}

//=====
//
// Function name: MakeOriginalAlphaString
//
//=====

int MakeOriginalAlphaString(int x,
                           int y,
                           int z,
                           char *str,
                           int percent)

```

```

{
    int len;
    int val;
    int start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage: %d\n",
percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if (x < 8)
    {
        printf("MakeOriginalAlphaString: string length must be >= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
(int) GetCurrentThreadId(), str);
#endif

    return len;
}

//=====
//
// Function name: MakeNumberString
//
//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16, 16,
string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));
}

```

```

        str[16] = 0;
    }
    return 16;
}

//=====
//
// Function name: MakeZipNumberString
//
//=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9, 9,
string)

    strcpy(str, "000011111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
//
// Function name: InitString
//
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

//=====
//
// Function name: InitAddress
//
// Description:
//
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;
}

```

```

        memset(zip, ' ', ZIP_LEN+1);
        zip[ZIP_LEN+1] = 0;
    }

//=====
//
// Function name: PaddString
//
//=====
void PaddString(int max, char *name)
{
    int len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

---

## tables.sql

---

```

-----
-- File: TABLES.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates TPC-C tables
-----

SET ANSI_NULL_DFLT_OFF ON
GO

USE tpcc
GO

-----
-- Remove all existing TPC-C tables
-----
if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
if exists ( select name from sysobjects where name = 'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )

```

```

drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
drop table stock
go

-----
-- Create new tables
-----
create table warehouse
(
    w_id          int,
    w_ytd         money,
    w_tax         smallmoney,
    w_name        char(10),
    w_street_1    char(20),
    w_street_2    char(20),
    w_city        char(20),
    w_state       char(2),
    w_zip         char(9)
) on MSSQL_misc_fg
go

create table district
(
    d_id          tinyint,
    d_w_id        int,
    d_ytd         money,
    d_next_o_id   int,
    d_tax         smallmoney,
    d_name        char(10),
    d_street_1    char(20),
    d_street_2    char(20),
    d_city        char(20),
    d_state       char(2),
    d_zip         char(9)
) on MSSQL_misc_fg
go

create table customer
(
    c_id          int,
    c_d_id        tinyint,
    c_w_id        int,
    c_discount    smallmoney,
    c_credit_lim  money,
    c_last        char(16),
    c_first       char(16),
    c_credit      char(2),
    c_balance     money,
    c_ytd_payment money,
    c_payment_cnt smallint,
    c_delivery_cnt smallint,
    c_street_1    char(20),
    c_street_2    char(20),
    c_city        char(20),
    c_state       char(2),

```

```

    c_zip         char(9),
    c_phone       char(16),
    c_since       datetime,
    c_middle      char(2),
    c_data        char(500)
) on MSSQL_cust_fg
go

-- Use the following table option if using c_data varchar(max)
-- sp_tableoption 'customer','large value types out of row','1'
-- go

create table history
(
    h_c_id        int,
    h_c_d_id      tinyint,
    h_c_w_id      int,
    h_d_id        tinyint,
    h_w_id        int,
    h_date        datetime,
    h_amount      smallmoney,
    h_data        char(24)
) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id       int,
    no_d_id       tinyint,
    no_w_id       int
) on MSSQL_misc_fg
go

create table orders
(
    o_id          int,
    o_d_id        tinyint,
    o_w_id        int,
    o_c_id        int,
    o_carrier_id  tinyint,
    o_ol_cnt      tinyint,
    o_all_local   tinyint,
    o_entry_d     datetime
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id       int,
    ol_d_id       tinyint,
    ol_w_id       int,
    ol_number     tinyint,
    ol_i_id       int,
    ol_delivery_d datetime,
    ol_amount     smallmoney,
    ol_supply_w_id int,
    ol_quantity   smallint,
    ol_dist_info  char(24)
) on MSSQL_ordln_fg
go

create table item
(

```

```

        i_id            int,
        i_name          char(24),
        i_price         smallmoney,
        i_data          char(50),
        i_im_id        int
    ) on MSSQL_misc_fg
go

create table stock
(
    s_i_id            int,
    s_w_id            int,
    s_quantity        smallint,
    s_ytd             int,
    s_order_cnt       smallint,
    s_remote_cnt      smallint,
    s_data            char(50),
    s_dist_01         char(24),
    s_dist_02         char(24),
    s_dist_03         char(24),
    s_dist_04         char(24),
    s_dist_05         char(24),
    s_dist_06         char(24),
    s_dist_07         char(24),
    s_dist_08         char(24),
    s_dist_09         char(24),
    s_dist_10         char(24)
) on MSSQL_stock_fg
go

```

## time.c

```

//      File:            TIME.C
//
//      Microsoft TPC-C Kit Ver. 4.62
//      Copyright Microsoft, 1996, 1997, 1998, 1999,
//      2000, 2001, 2002, 2005
//      Purpose: Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
//
// Function name: TimeNow
//
//=====
long TimeNow()
{
    long            time_now;
    struct _timeb  el_time;

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

```

```

        _ftime(&el_time);

        time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

## tpcc.h

```

//      File:            TPCC.H
//
//      Microsoft TPC-C Kit Ver. 4.51
//      Copyright Microsoft, 1996, 1997, 1998, 1999,
//      2000, 2001, 2002, 2003, 2005
//      Purpose: Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.51"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>
#include <math.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

// General constants
#define MILLI            1000
#define FALSE            0
#define TRUE             1
#define UNDEF            -1
#define MINPRINTASCII   32
#define MAXPRINTASCII   126

// Default environment constants
#define SERVER            ""
#define DATABASE         "tpcc"
#define USER              "sa"
#define PASSWORD         ""

// Default loader arguments
#define BATCH             10000
#define DEFLDPACKSIZE    32768
#define LOADER_RES_FILE  "C:\\MSTPCC.450\\SETUP\\LOGS\\load.out"

```

```

#define LOADER_LOG_PATH
        "C:\\MSTPCC.450\\SETUP\\LOGS\\"
#define LOADER_NURAND_C          123
#define DEF_STARTING_WAREHOUSE  1
#define BUILD_INDEX             1 // build both
data and indexes
#define INDEX_ORDER             1 // build
indexes before load
#define SCALE_DOWN              0 // build a normal
scale database
#define INDEX_SCRIPT_PATH      "scripts"

typedef struct
{
    char          *server;
    char          *database;
    char          *user;
    char          *password;
    char          tables_all;
    BOOL          // set if loading all tables
    BOOL          table_item;
    // set if loading ITEM table specifically
    BOOL          table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL          table_customer; //
set if loading CUSTOMER and HISTORY
    BOOL          table_orders; //
set if loading NEW-ORDER, ORDERS, ORDER-LINE
    long          num_warehouses;
    long          batch;
    long          verbose;
    long          pack_size;
    char          *loader_res_file;
    char          *log_path;
    char          *synch_servername;
    long          case_sensitivity;
    long          starting_warehouse;
    long          build_index;
    long          index_order;
    long          scale_down;
    char          *index_script_path;
} TPCCCLR_ARGS;

// String length constants
#define SERVER_NAME_LEN        20
#define DATABASE_NAME_LEN     20
#define USER_NAME_LEN         20
#define PASSWORD_LEN          20
#define TABLE_NAME_LEN       20
#define I_DATA_LEN            50
#define I_NAME_LEN            24
#define BRAND_LEN              1
#define LAST_NAME_LEN         16
#define W_NAME_LEN            10
#define ADDRESS_LEN           20
#define STATE_LEN              2
#define ZIP_LEN                9
#define S_DIST_LEN            24
#define S_DATA_LEN            50
#define D_NAME_LEN            10
#define FIRST_NAME_LEN        16
#define MIDDLE_NAME_LEN       2
#define PHONE_LEN              16

```

```

#define CREDIT_LEN             2
#define C_DATA_LEN             500
#define H_DATA_LEN            24
#define DIST_INFO_LEN          24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN             25
#define OL_DIST_INFO_LEN       24
#define C_SINCE_LEN            23
#define H_DATE_LEN             23
#define OL_DELIVERY_D_LEN      23
#define O_ENTRY_D_LEN          23

```

```

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeAlphaStringPadded();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

```

## tpccldr.c

```

//=====
// File: TPCCCLR.C Microsoft TPC-C Kit Ver. 4.51
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2003
// Purpose: Source file for TPC-C database loader
//=====
// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS 100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10

```

```

#define ORDERS_PER_DISTRICT    3000
#define ORDERS_SCALE_DOWN     30
#define MAX_CUSTOMER_THREADS  2
#define MAX_ORDER_THREADS     3
#define MAX_MAIN_THREADS      4
#define MAX_SQL_ERRORS        10

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);
long NURand();
void LoadItem();
void LoadWarehouse();
void Stock();
void District();
void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();
void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void CheckForCommit_Big();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures
typedef struct
{
    double                ol_i_id;
    long                  ol_supply_w_id;
    short                 ol_quantity;
    double                ol_amount;
    char                  ol_dist_info[DIST_INFO_LEN+1];
    char                  ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long                  o_id;
    short                 o_d_id;
    long                  o_w_id;
    long                  o_c_id;
    short                 o_carrier_id;
    short                 o_ol_cnt;
    short                 o_all_local;
    ORDER_LINE_STRUCT    o_ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long                  c_id;
    short                 c_d_id;
    long                  c_w_id;
    char                  c_first[FIRST_NAME_LEN+1];

```

```

    char                  c_middle[MIDDLE_NAME_LEN+1];
    char                  c_last[LAST_NAME_LEN+1];
    char                  c_street_1[ADDRESS_LEN+1];
    char                  c_street_2[ADDRESS_LEN+1];
    char                  c_city[ADDRESS_LEN+1];
    char                  c_state[STATE_LEN+1];
    char                  c_zip[ZIP_LEN+1];
    char                  c_phone[PHONE_LEN+1];
    char                  c_credit[CREDIT_LEN+1];
    double                c_credit_lim;
    double                c_discount;
    char                  c_balance[6];
    double                c_ytd_payment;
    short                 c_payment_cnt;
    short                 c_delivery_cnt;
    char                  c_data[C_DATA_LEN+1];
    double                h_amount;
    char                  h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char                  c_last[LAST_NAME_LEN+1];
    char                  c_first[FIRST_NAME_LEN+1];
    long                  c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long                  time_start;
} LOADER_TIME_STRUCT;

// Global variables
char                    szLastError[300];
HENV                    henv;

HDBC                    v_hdbc; // for SQL
Server version verification
HDBC                    i_hdbc1; // for ITEM table
HDBC                    w_hdbc1; // for WAREHOUSE,
DISTRICT, STOCK
HDBC                    c_hdbc1; // for CUSTOMER
HDBC                    c_hdbc2; // for HISTORY
HDBC                    o_hdbc1; // for ORDERS
HDBC                    o_hdbc2; // for NEW-ORDER

HDBC                    o_hdbc3; // for ORDER-LINE

HSTMT                   v_hstmt; // for SQL Server
version verification
HSTMT                   i_hstmt1;
HSTMT                   w_hstmt1;
HSTMT                   c_hstmt1, c_hstmt2;
HSTMT                   o_hstmt1, o_hstmt2, o_hstmt3;

int                      total_db_errors;

ORDERS_STRUCT           orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT         customer_buf[CUSTOMERS_PER_DISTRICT];
long                    orders_rows_loaded;
double                  new_order_rows_loaded;

```



```

double          order_line_rows_loaded;
long            history_rows_loaded;
long            customer_rows_loaded;
double         stock_rows_loaded;
long            district_rows_loaded;
long            item_rows_loaded;
long            warehouse_rows_loaded;
long            main_time_start;
long            main_time_end;
long            max_items;
long            customers_per_district;
long            orders_per_district;
long            first_new_order;
long            last_new_order;

TPCCLDR_ARGS   *aptr, args;

//=====
//
// Function name: main
//
//=====
int main(int  argc, char **argv)
{
    DWORD          dwThreadID[MAX_MAIN_THREADS];
    HANDLE         hThread[MAX_MAIN_THREADS];
    FILE           *fLoader;
    char           buffer[255];
    int            i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");
    printf("\n* Microsoft SQL Server *");
    printf("\n* TPC-C BENCHMARK KIT: Database loader *");
    printf("\n* Version %s *", TPCKIT_VER);
    printf("\n*");
    printf("\n*****\n\n");

    // process command line arguments
    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    printf("Build interface is ODBC.\n");

    if (aptr->build_index == 0)
        printf("Data load only - no index creation.\n");
    else
        printf("Data load and index creation.\n");

    if (aptr->index_order == 0)
        printf("Clustered indexes will be created after bulk load.\n");
    else
        printf("Clustered indexes will be created before bulk load.\n");

    // set database scale values
    if (aptr->scale_down == 1)
    {
        printf("**** Scaled Down Database ****\n");
    }
}

```

```

max_items = MAXITEMS_SCALE_DOWN;
customers_per_district = CUSTOMERS_SCALE_DOWN;
orders_per_district = ORDERS_SCALE_DOWN;
first_new_order = 0;
last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// start loading data
sprintf(buffer, "TPC-C load started for %ld warehouses.\n", aptr->num_warehouses);
if (aptr->scale_down == 1)
{
    sprintf(buffer, "SCALED DOWN DATABASE.\n");
}

printf("%s", buffer);
fprintf(fLoader, "%s", buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads
if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting loader threads for: item\n");

    hThread[0] = CreateThread(NULL,
                                0,
                                (LPTHREAD_START_ROUTINE) LoadItem,
                                NULL,
                                0,
                                &dwThreadID[0]);

    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating thread =
0.\n");
        exit(-1);
    }
}

```

```

        if (aptr->tables_all || aptr->table_warehouse)
        {
            fprintf(fLoader, "Starting loader threads for: warehouse\n");
            hThread[1] = CreateThread(NULL,
                                     0,
(LPTHREAD_START_ROUTINE) LoadWarehouse,
NULL,
0,
&dwThreadID[1]);

            if (hThread[1] == NULL)
            {
                printf("Error, failed in creating creating thread =
1.\n");
                exit(-1);
            }
        }

        if (aptr->tables_all || aptr->table_customer)
        {
            fprintf(fLoader, "Starting loader threads for: customer\n");
            hThread[2] = CreateThread(NULL,
                                     0,
(LPTHREAD_START_ROUTINE) LoadCustomer,
NULL,
0,
&dwThreadID[2]);

            if (hThread[2] == NULL)
            {
                printf("Error, failed in creating creating main thread
= 2.\n");
                exit(-1);
            }
        }

        if (aptr->tables_all || aptr->table_orders)
        {
            fprintf(fLoader, "Starting loader threads for: orders\n");
            hThread[3] = CreateThread(NULL,
                                     0,
(LPTHREAD_START_ROUTINE) LoadOrders,
NULL,
0,
&dwThreadID[3]);

            if (hThread[3] == NULL)
            {
                printf("Error, failed in creating creating main thread
= 3.\n");
                exit(-1);
            }
        }

```

```

        }
    }

    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject( hThread[i], INFINITE );
            CloseHandle(hThread[i]);
            hThread[i] = NULL;
        }
    }

    main_time_end = (TimeNow() / MILLI);
    sprintf(buffer, "\nTPC-C load completed successfully in %ld minutes.\n",
            (main_time_end - main_time_start)/60);

    printf("%s",buffer);
    fprintf(fLoader, "%s", buffer);

    fclose(fLoader);

    SQLFreeEnv(henv);

    exit(0);

    return 0;
}

//=====
//
// Function name: LoadItem
//
//=====
void LoadItem()
{
    int            i;
    long          i_id;
    long          i_im_id;
    char          i_name[I_NAME_LEN+1];
    double        i_price;
    char          i_data[I_DATA_LEN+1];
    char          name[20];
    long          time_start;
    RETCODE       rc;
    DBINT         rcint;
    char          bcphint[128];
    char          err_log_path[256];

    // Seed with unique number
    seed(11);

    printf("Loading item table...\n");

    //if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitm1");

    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);

```

```

sprintf(name, "%s..%s", aptr->database, "item");

strcpy(err_log_path, aptr->log_path);
strcat(err_log_path, "item.err");
rc = bcp_init(i_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(i_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (i_id), ROWS_PER_BATCH =
100000*");
    rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);
}

i = 0;
rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(i_hdbc1);
rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(i_hdbc1);

time_start = (TimeNow() / MILLI);

item_rows_loaded = 0;

for (i_id = 1; i_id <= max_items; i_id++)
{
    i_im_id = RandomNumber(1L, 10000L);

    MakeAlphaStringPadded(14, 24, I_NAME_LEN, i_name);

    i_price = ((float) RandomNumber(100L, 10000L))/100.0;

    MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

    rc = bcp_sendrow(i_hdbc1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    item_rows_loaded++;
    CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
}

rcint = bcp_done(i_hdbc1);

```

```

if (rcint < 0)
    HandleErrorDBC(i_hdbc1);

printf("Finished loading item table.\n");

SQLFreeStmt(i_hstmt1, SQL_DROP);
SQLDisconnect(i_hdbc1);
SQLFreeConnect(i_hdbc1);

// if build index after load
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxitmcl");
}

//=====
//
// Function : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are created
//
//=====
void LoadWarehouse()
{
    int i;
    long w_id;
    char w_name[W_NAME_LEN+1];
    char w_street_1[ADDRESS_LEN+1];
    char w_street_2[ADDRESS_LEN+1];
    char w_city[ADDRESS_LEN+1];
    char w_state[STATE_LEN+1];
    char w_zip[ZIP_LEN+1];
    double w_tax;
    double w_ytd;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcint;
    char bcphint[128];
    char err_log_path[256];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\n");

    // if build index before load..
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxwarcl");

    InitString(w_name, W_NAME_LEN+1);
    InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

    sprintf(name, "%s..%s", aptr->database, "warehouse");

    strcpy(err_log_path, aptr->log_path);
    strcat(err_log_path, "warehouse.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);

    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))

```

```

    {
        sprintf(bcphint, "tablock, order (w_id), ROWS_PER_BATCH = %d",
aptr->num_warehouses);
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    i = 0;
    rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    time_start = (TimeNow() / MILLI);

    warehouse_rows_loaded = 0;

    for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
    {
        MakeAlphaStringPadded(6,10, W_NAME_LEN, w_name);

        MakeAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

        w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        w_ytd = 300000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        warehouse_rows_loaded++;
    }

```

```

        CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded,
"warehouse", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading warehouse table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxwarc1");

    stock_rows_loaded = 0;
    district_rows_loaded = 0;

    District();
    Stock();
}

//=====
//
// Function : District
//
//=====
void District()
{
    int          i;
    short        d_id;
    long         d_w_id;
    char         d_name[D_NAME_LEN+1];
    char         d_street_1[ADDRESS_LEN+1];
    char         d_street_2[ADDRESS_LEN+1];
    char         d_city[ADDRESS_LEN+1];
    char         d_state[STATE_LEN+1];
    char         d_zip[ZIP_LEN+1];
    double       d_tax;
    double       d_ytd;
    char         name[20];
    long         d_next_o_id;
    long         time_start;
    long         w_id;
    RETCODE      rc;
    DBINT        rcint;
    char         bcphint[128];
    char         err_log_path[256];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
    sprintf(name, "%s.%s", aptr->database, "district");

    strcpy(err_log_path, aptr->log_path);
    strcat(err_log_path, "district.err");
}

```

```

rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (d_w_id, d_id), ROWS_PER_BATCH
= %u", (aptr->num_warehouses * 10));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

d_ytd = 30000.0;
d_next_o_id = orders_per_district+1;
time_start = (TimeNow() / MILLI);
for (w_id = aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)

```

```

{
    d_w_id = w_id;
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        MakeAlphaStringPadded(6,10,D_NAME_LEN, d_name);
        MakeAddress(d_street_1, d_street_2, d_city, d_state,
d_zip);

        d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading district table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxdiscl");

return;
}

//=====
//
// Function : Stock
//
//=====
void Stock()
{
    int i;
    long s_i_id;
    long s_w_id;
    short s_quantity;
    char s_dist_01[S_DIST_LEN+1];
    char s_dist_02[S_DIST_LEN+1];
    char s_dist_03[S_DIST_LEN+1];
    char s_dist_04[S_DIST_LEN+1];
    char s_dist_05[S_DIST_LEN+1];
    char s_dist_06[S_DIST_LEN+1];
    char s_dist_07[S_DIST_LEN+1];
    char s_dist_08[S_DIST_LEN+1];
    char s_dist_09[S_DIST_LEN+1];
    char s_dist_10[S_DIST_LEN+1];
    long s_ytd;
    short s_order_cnt;
    short s_remote_cnt;
    char s_data[S_DATA_LEN+1];
    short len;
    char name[20];
    long time_start;

```

```

RETCODE rc;
DBINT rcint;
char bcp hint[128];
char err_log_path[256];

// Seed with unique number
seed(3);

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxstkcl");

sprintf(name, "%s.%s", aptr->database, "stock");

strcpy(err_log_path, aptr->log_path);
strcat(err_log_path, "stock.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcp hint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcp hint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;

time_start = (TimeNow() / MILLI);

printf("...Loading stock table\n");

for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (long)aptr->starting_warehouse; s_w_id <= aptr-
>num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);
    }
}

```

```

        len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        stock_rows_loaded++;
        CheckForCommit_Big(w_hdbc1, w_hstmt1,
stock_rows_loaded, "stock", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading stock table.\n");

    SQLFreeStmt(w_hstmt1, SQL_DROP);
    SQLDisconnect(w_hdbc1);
    SQLFreeConnect(w_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxstkcl");

    return;
}

//=====
//
// Function   : LoadCustomer
//
//=====
void LoadCustomer()
{
    LOADER_TIME_STRUCT    customer_time_start;
    LOADER_TIME_STRUCT    history_time_start;
    long                  w_id;
    short                 d_id;
    DWORD                 dwThreadID[MAX_CUSTOMER_THREADS];
    HANDLE                 hThread[MAX_CUSTOMER_THREADS];
    char                  name[20];
    RETCODE                rc;
    DBINT                 rcint;
    char                  bcphint[128];
    char                  cmd[256];
    int                   num_procs;
    char                  err_log_path_cust[256];
    char                  err_log_path_hist[256];

    // Seed with unique number
    seed(5);

    printf("Loading customer and history tables...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxcuscl");
        // check the number of processors on this system
        // if 8 or more processors, then build index on History.

```

```

        // if less than 8 processors, do not build the index
        num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
        if ( num_procs >= 8 )
            BuildIndex("idxhiscl");
    }

    // Initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "customer");

    strcpy(err_log_path_cust,aptr->log_path);
    strcat(err_log_path_cust,"customer.err");
    rc = bcp_init(c_hdbc1, name, NULL, err_log_path_cust, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "history");

    rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
    strcpy(err_log_path_hist,aptr->log_path);
    strcat(err_log_path_hist,"history.err");
    rc = bcp_init(c_hdbc2, name, NULL, err_log_path_hist, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    sprintf(bcphint, "tablock");
    rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    customer_rows_loaded = 0;
    history_rows_loaded = 0;

    CustomerBufInit();

    customer_time_start.time_start = (TimeNow() / MILLI);
    history_time_start.time_start = (TimeNow() / MILLI);

    for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
    {
        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {
            CustomerBufLoad(d_id, w_id);

            // Start parallel loading threads here...
            // Start customer table thread
            printf("...Loading customer table for: d_id = %d, w_id
= %d\n", d_id, w_id);

            hThread[0] = CreateThread(NULL,
0,

```

```

(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
0,
&dwThreadID[0]);

    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating
thread = 0.\n");
        exit(-1);
    }

    // Start History table thread
    printf("...Loading history table for: d_id = %d, w_id
= %d\n", d_id, w_id);

    hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
0,
&dwThreadID[1]);

    if (hThread[1] == NULL)
    {
        printf("Error, failed in creating creating
thread = 1.\n");
        exit(-1);
    }

    WaitForSingleObject( hThread[0], INFINITE );
    WaitForSingleObject( hThread[1], INFINITE );

    if (CloseHandle(hThread[0]) == FALSE)
    {
        printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
    }

    if (CloseHandle(hThread[1]) == FALSE)
    {
        printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
    }
}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)

```

```

        HandleErrorDBC(c_hdbc2);

    printf("Finished loading customer table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
    {
        BuildIndex("idxcuscl");
        // check the number of processors on this system
        // if 8 or more processors, then build index on History.
        // if less than 8 processors, do not build the index
        num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
        if (num_procs >= 8)
            BuildIndex("idxhiscl");
    }

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxcusnc");

    // Output the NURAND used for the loader into C_FIRST for C_ID = 1,
    // C_W_ID = 1, and C_D_ID = 1
    sprintf(cmd, "osql -S%s -U%s -P%s -d%s -e -Q\"update customer set c_first
= 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" > %snurand_load.log",
aptr->server,
aptr->user,
aptr->password,
aptr->database,
LOADER_NURAND_C,
aptr->log_path);

    system(cmd);

    SQLFreeStmt(c_hstmt1, SQL_DROP);
    SQLDisconnect(c_hdbc1);
    SQLFreeConnect(c_hdbc1);

    SQLFreeStmt(c_hstmt2, SQL_DROP);
    SQLDisconnect(c_hdbc2);
    SQLFreeConnect(c_hdbc2);

    return;
}

//=====
//
// Function : CustomerBufInit
//
//=====
void CustomerBufInit()
{
    long i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
    }
}

```



```

strcpy(customer_buf[i].c_street_2,"");
strcpy(customer_buf[i].c_city,"");
strcpy(customer_buf[i].c_state,"");
strcpy(customer_buf[i].c_zip,"");
strcpy(customer_buf[i].c_phone,"");
strcpy(customer_buf[i].c_credit,"");

customer_buf[i].c_credit_lim = 0;
customer_buf[i].c_discount = (float) 0;

strcpy(customer_buf[i].c_balance,"");

customer_buf[i].c_ytd_payment = 0;
customer_buf[i].c_payment_cnt = 0;
customer_buf[i].c_delivery_cnt = 0;

strcpy(customer_buf[i].c_data,"");

customer_buf[i].h_amount = 0;

strcpy(customer_buf[i].h_data,"");
}
}

//=====
//
// Function : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====
void CustomerBufLoad(int d_id, long w_id)
{
    long i;
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

        MakeAlphaStringPadded(8,16,FIRST_NAME_LEN, c[i].c_first);

        c[i].c_id = i+1;

        printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
            d_id, w_id);

        for (i=0;i<customers_per_district;i++)
        {
            customer_buf[i].c_d_id = d_id;
            customer_buf[i].c_w_id = w_id;
            customer_buf[i].h_amount = 10.0;
            customer_buf[i].c_ytd_payment = 10.0;
            customer_buf[i].c_payment_cnt = 1;
            customer_buf[i].c_delivery_cnt = 0;
            customer_buf[i].c_id = c[i].c_id;
            strcpy(customer_buf[i].c_first, c[i].c_first);
            strcpy(customer_buf[i].c_last, c[i].c_last);
            customer_buf[i].c_middle[0] = '0';

```

```

customer_buf[i].c_middle[1] = 'E';
MakeAddress(customer_buf[i].c_street_1,
            customer_buf[i].c_street_2,
            customer_buf[i].c_city,
            customer_buf[i].c_state,
            customer_buf[i].c_zip);

MakeNumberString(16, 16, PHONE_LEN, customer_buf[i].c_phone);

if (RandomNumber(1L, 100L) > 10)
    customer_buf[i].c_credit[0] = 'G';
else
    customer_buf[i].c_credit[0] = 'B';
customer_buf[i].c_credit[1] = 'C';
customer_buf[i].c_credit_lim = 50000.0;
customer_buf[i].c_discount = ((float) RandomNumber(0L, 5000L)) /
10000.0;

strcpy(customer_buf[i].c_balance,"-10.0");
MakeAlphaStringPadded(300, 500, C_DATA_LEN,
customer_buf[i].c_data);

// Generate HISTORY data
MakeAlphaStringPadded(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
}
}

//=====
//
// Function : LoadCustomerTable
//
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    long i;
    long c_id;
    short c_d_id;
    long c_w_id;
    char c_first[FIRST_NAME_LEN+1];
    char c_middle[MIDDLE_NAME_LEN+1];
    char c_last[LAST_NAME_LEN+1];
    char c_street_1[ADDRESS_LEN+1];
    char c_street_2[ADDRESS_LEN+1];
    char c_city[ADDRESS_LEN+1];
    char c_state[STATE_LEN+1];
    char c_zip[ZIP_LEN+1];
    char c_phone[PHONE_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_credit_lim;
    double c_discount;
    char c_balance[6];
    double c_ytd_payment;
    short c_payment_cnt;
    short c_delivery_cnt;
    char c_data[C_DATA_LEN+1];
    char c_since[C_SINCE_LEN+1];
    RETCODE rc;

    i = 0;
    rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

```

```

rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

```

```

rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, C_DATA_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;

    strcpy(c_first, customer_buf[i].c_first);
    strcpy(c_middle, customer_buf[i].c_middle);
    strcpy(c_last, customer_buf[i].c_last);
    strcpy(c_street_1, customer_buf[i].c_street_1);
    strcpy(c_street_2, customer_buf[i].c_street_2);
    strcpy(c_city, customer_buf[i].c_city);
    strcpy(c_state, customer_buf[i].c_state);
    strcpy(c_zip, customer_buf[i].c_zip);
    strcpy(c_phone, customer_buf[i].c_phone);
    strcpy(c_credit, customer_buf[i].c_credit);

    FormatDate(&c_since);

    c_credit_lim = customer_buf[i].c_credit_lim;
    c_discount = customer_buf[i].c_discount;
    strcpy(c_balance, customer_buf[i].c_balance);
    c_ytd_payment = customer_buf[i].c_ytd_payment;
    c_payment_cnt = customer_buf[i].c_payment_cnt;
    c_delivery_cnt = customer_buf[i].c_delivery_cnt;
    strcpy(c_data, customer_buf[i].c_data);

    // Send data to server
    rc = bcp_sendrow(c_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    customer_rows_loaded++;
    CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
}
}

//=====
//
// Function : LoadHistoryTable
//
//=====
void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    long        long        i;
    long        c_id;
    short       c_d_id;
    long        c_w_id;
    double      h_amount;
    char        h_data[H_DATA_LEN+1];
    char        h_date[H_DATE_LEN+1];
    RETCODE     rc;

```

```

        i = 0;
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, ++i);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);
        rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);

        for (i = 0; i < customers_per_district; i++)
        {
            c_id = customer_buf[i].c_id;
            c_d_id = customer_buf[i].c_d_id;
            c_w_id = customer_buf[i].c_w_id;
            h_amount = customer_buf[i].h_amount;
            strcpy(h_data, customer_buf[i].h_data);

            FormatDate(&h_date);

            // send to server
            rc = bcp_sendrow(c_hdbc2);
            if (rc != SUCCEEDED)
                HandleErrorDBC(c_hdbc2);

            history_rows_loaded++;
            CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
        }
    }

//=====
//
// Function   : LoadOrders
//
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT    orders_time_start;
    LOADER_TIME_STRUCT    new_order_time_start;

```

```

        LOADER_TIME_STRUCT    order_line_time_start;
        long                    w_id;
    short
        DWORD                    d_id;
        dwThreadID[MAX_ORDER_THREADS];
        HANDLE                    hThread[MAX_ORDER_THREADS];
        char                      name[20];
        RETCODE                    rc;
        char                      bcphint[128];
        char                      err_log_path_ord[256];
        char                      err_log_path_nord[256];
        char                      err_log_path_ordl[256];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordcl");
        BuildIndex("idxmodcl");
        BuildIndex("idxodlcl");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    strcpy(err_log_path_ord, aptr->log_path);
    strcat(err_log_path_ord, "orders.err");
    rc = bcp_init(o_hdbc1, name, NULL, err_log_path_ord, DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(o_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "new_order");

    rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
    strcpy(err_log_path_nord, aptr->log_path);
    strcat(err_log_path_nord, "neword.err");
    rc = bcp_init(o_hdbc2, name, NULL, err_log_path_nord, DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc2);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (no_w_id, no_d_id, no_o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
        rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(o_hdbc2);
    }

    sprintf(name, "%s..%s", aptr->database, "order_line");

```

```

rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
strcpy(err_log_path_ordl, aptr->log_path);
strcat(err_log_path_ordl, "ordline.err");
rc = bcp_init(o_hdbc3, name, NULL, err_log_path_ordl, DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id, ol_o_id,
ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 300000));
rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);
}

orders_rows_loaded = 0;
new_order_rows_loaded = 0;
order_line_rows_loaded = 0;

OrdersBufInit();

orders_time_start.time_start = (TimeNow() / MILLI);
new_order_time_start.time_start = (TimeNow() / MILLI);
order_line_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        OrdersBufLoad(d_id, w_id);

        // start parallel loading threads here...
        // start Orders table thread
        printf("...Loading Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadOrdersTable,

&orders_time_start,

0,

&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // start NewOrder table thread
        printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

```

```

        hThread[1] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadNewOrderTable,

&new_order_time_start,

0,

&dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        // start Order-Line table thread
        printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[2] = CreateThread(NULL,

0,

(LPTHREAD_START_ROUTINE) LoadOrderLineTable,

&order_line_time_start,

0,

&dwThreadID[2]);

        if (hThread[2] == NULL)
        {
            printf("Error, failed in creating creating
thread = 2.\n");
            exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );
        WaitForSingleObject( hThread[2], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[2]) == FALSE)
        {
            printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
        }

```

```

    }
}

printf("Finished loading orders.\n");

return;
}

//=====
//
// Function   : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufInit()
{
    int    i;
    int    j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o_ol_cnt = 0;
        orders_buf[i].o_all_local = 0;

        for (j=0;j<=14;j++)
        {
            orders_buf[i].o_ol[j].ol = 0;
            orders_buf[i].o_ol[j].ol_i_id = 0;
            orders_buf[i].o_ol[j].ol_supply_w_id = 0;
            orders_buf[i].o_ol[j].ol_quantity = 0;
            orders_buf[i].o_ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o_ol[j].ol_dist_info,"");
        }
    }
}

//=====
//
// Function   : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufLoad(short d_id, long w_id)
{
    int    cust[ORDERS_PER_DISTRICT+1];
    long   o_id;
    long   ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {

```

```

// Generate ORDER and NEW-ORDER data
orders_buf[o_id].o_d_id = d_id;
orders_buf[o_id].o_w_id = w_id;
orders_buf[o_id].o_c_id = o_id+1;
orders_buf[o_id].o_ol_cnt = (short)RandomNumber(5L, 15L);

if (o_id < first_new_order)
{
    orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);
    orders_buf[o_id].o_all_local = 1;
}
else
{
    orders_buf[o_id].o_carrier_id = 0;
    orders_buf[o_id].o_all_local = 1;
}

for (ol=0; ol<orders_buf[o_id].o_ol_cnt; ol++)
{
    orders_buf[o_id].o_ol[ol].ol = ol+1;
    orders_buf[o_id].o_ol[ol].ol_i_id = RandomNumber(1L,
max_items);
    orders_buf[o_id].o_ol[ol].ol_supply_w_id = w_id;
    orders_buf[o_id].o_ol[ol].ol_quantity = 5;
    MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o_ol[ol].ol_dist_info);

    // Generate ORDER-LINE data
    if (o_id < first_new_order)
    {
        orders_buf[o_id].o_ol[ol].ol_amount = 0;
        // Added to insure ol_delivery_d set
        properly during load
        FormatDate(&orders_buf[o_id].o_ol[ol].ol_delivery_d);
    }
    else
    {
        orders_buf[o_id].o_ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
        // Added to insure ol_delivery_d set
        properly during load
        // odbc datetime format
        strcpy(orders_buf[o_id].o_ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
    }
}

//=====
//
// Function   : LoadOrdersTable
//
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int    i;
    long   o_id;

```

```

        short    o_d_id;
        long     o_w_id;
    long    o_c_id;
    short   o_carrier_id;
    short   o_ol_cnt;
    short   o_all_local;
    char    o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc;
    DBINT   rcint;

    // bind ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN, NULL, 0,
SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;
        o_c_id    = orders_buf[i].o_c_id;
        o_carrier_id = orders_buf[i].o_carrier_id;
        o_ol_cnt  = orders_buf[i].o_ol_cnt;
        o_all_local = orders_buf[i].o_all_local;

        FormatDate(&o_entry_d);

        // send data to server
        rc = bcp_sendrow(o_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        orders_rows_loaded++;
    }

```

```

        CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded, "orders",
&orders_time_start->time_start);
    }
}

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxordcl");

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxordnc");
}
}

//=====
//
// Function   : LoadNewOrderTable
//
//=====
void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    long    long    i;
    short   o_id;
           o_d_id;
           o_w_id;
           RETCODE rc;
           DBINT   rcint;

    // Bind NEW-ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);
    }
}

```

```

        new_order_rows_loaded++;
        CheckForCommit_Big(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
    }

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxmodc1");
    }
}

//=====
//
// Function   : LoadOrderLineTable
//
//=====
void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    long          i;
    long          j;
    long          o_id;
    short         o_d_id;
    long          o_w_id;
    double        ol;
    long          ol_i_id;
    long          ol_supply_w_id;
    short         ol_quantity;
    double        ol_amount;
    char          ol_dist_info[DIST_INFO_LEN+1];
    char          ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE       rc;
    DBINT        rcint;

    // bind ORDER-LINE data
    i = 0;
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);

```

```

    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0, OL_DELIVERY_D_LEN,
NULL, 0, SQLCHARACTER, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0,
++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id   = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;

        for (j=0; j < orders_buf[i].o_ol_cnt; j++)
        {
            ol           = orders_buf[i].o_ol[j].ol;
            ol_i_id     = orders_buf[i].o_ol[j].ol_i_id;
            ol_supply_w_id = orders_buf[i].o_ol[j].ol_supply_w_id;
            ol_quantity = orders_buf[i].o_ol[j].ol_quantity;
            ol_amount   = orders_buf[i].o_ol[j].ol_amount;

            strcpy(ol_delivery_d, orders_buf[i].o_ol[j].ol_delivery_d);

            strcpy(ol_dist_info, orders_buf[i].o_ol[j].ol_dist_info);

            rc = bcp_sendrow(o_hdbc3);
            if (rc != SUCCEEDED)
                HandleErrorDBC(o_hdbc3);

            order_line_rows_loaded++;

            CheckForCommit_Big(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
        }
    }

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc3);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc3);

        SQLFreeStmt(o_hstmt3, SQL_DROP);
        SQLDisconnect(o_hdbc3);
        SQLFreeConnect(o_hdbc3);
    }
}

```

```

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxodlcl");
}

//=====
//
// Function : GetPermutation
//
//=====
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
//
// Function : CheckForCommit
//
//=====
void CheckForCommit(HDBC hdbc,
                   HSTMT hstmt,
                   long rows_loaded,
                   char *table_name,
                   long *time_start)
{
    long time_end, time_diff;

    if ( !(rows_loaded % aptr->batch) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d (%.2f
rps)\n",
                aptr->batch,
                table_name,
                time_diff,
                rows_loaded,
                (float) aptr->batch / (time_diff ? time_diff
: 1L));

        *time_start = time_end;
    }

    return;
}

//=====

```

```

//
// Function : CheckForCommit_Big
//
//=====
void CheckForCommit_Big(HDBC hdbc,
                       HSTMT hstmt,
                       double rows_loaded,
                       char *table_name,
                       long *time_start)
{
    long time_end, time_diff;

    if ( !(fmod(rows_loaded,aptr->batch) ) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %.0f
(%.2f rps)\n",
                aptr->batch,
                table_name,
                time_diff,
                rows_loaded,
                (float) aptr->batch / (time_diff ? time_diff
: 1L));

        *time_start = time_end;
    }

    return;
}

//=====
//
// Function : OpenConnections
//
//=====
void OpenConnections()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv, &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
}

```



```

        SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

        // Open connections to SQL Server
        // Connection 1
        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

        rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        rc = SQLDriverConnect ( i_hdbc1,

                                NULL,

                                (SQLCHAR*)&szDriverString[0] ,

                                SQL_NTS,

                                (SQLCHAR*)&szDriverStringOut[0],

                                sizeof(szDriverStringOut),

                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );

        if ( (rc != SUCCEED) &&
            (rc != SQL_SUCCESS_WITH_INFO) )
        {
            HandleErrorDBC(i_hdbc1);
            printf("TPC-C Loader aborted!\n");
            exit(9);
        }

        // Connection 2
        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

        rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);

        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = SQLDriverConnect ( w_hdbc1,

                                NULL,

                                (SQLCHAR*)&szDriverString[0] ,

                                SQL_NTS,

```

```

                                (SQLCHAR*)&szDriverStringOut[0],

                                sizeof(szDriverStringOut),

                                &cbDriverStringOut,

                                SQL_DRIVER_NOPROMPT );

        if ( (rc != SUCCEED) &&
            (rc != SQL_SUCCESS_WITH_INFO) )
        {
            HandleErrorDBC(w_hdbc1);
            printf("TPC-C Loader aborted!\n");
            exit(9);
        }

        // Connection 3
        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

        rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = SQLDriverConnect ( c_hdbc1,

                                NULL,

                                (SQLCHAR*)&szDriverString[0] ,

                                SQL_NTS,

                                (SQLCHAR*)&szDriverStringOut[0],

                                sizeof(szDriverStringOut),

                                &cbDriverStringOut,

                                SQL_DRIVER_NOPROMPT );

        if ( (rc != SUCCEED) &&
            (rc != SQL_SUCCESS_WITH_INFO) )
        {
            HandleErrorDBC(c_hdbc1);
            printf("TPC-C Loader aborted!\n");
            exit(9);
        }

        // Connection 4
        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

        rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        rc = SQLDriverConnect ( c_hdbc2,

```

```

NULL,
(SQLCHAR*)&szDriverString[0] ,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
    (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}
// Connection 5
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );
rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);
rc = SQLDriverConnect ( o_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
    (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}
// Connection 6
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );
rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)

```

```

HandleErrorDBC(o_hdbc2);
rc = SQLDriverConnect ( o_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
    (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}
// Connection 7
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );
rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = SQLDriverConnect ( o_hdbc3,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
    (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc3);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}
}
//=====
//
// Function name: BuildIndex
//
//=====
void BuildIndex(char *index_script)

```

```

{
    char    cmd[256];

    printf("Starting index creation:  %s\n",index_script);

    sprintf(cmd, "osql -S%s -U%s -P%s -e -i%s\\%s.sql > %s%s.log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->index_script_path,
            index_script,
            aptr->log_path,
            index_script);

    system(cmd);

    printf("Finished index creation:  %s\n",index_script);
}

//=====
//
// Function name: HandleErrorDBC
//
//=====
void HandleErrorDBC (SQLHDBC  hdbc1)
{
    SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN           NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN        rc2;
    char             timebuf[128];
    char             datebuf[128];
    char             err_log_path[256];
    FILE             *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
    &NativeError,
                                Msg, sizeof(Msg) , &MsgLen )) !=
    SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n==>SQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)
            printf("ERROR:  Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
            fclose(fp1);
        }

        i++;
    }
}

```

```

}

//=====
//
// Function    : HandleErrorSTMT
//
//=====
void HandleErrorSTMT (HSTMT  hstmt1)
{
    SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN           NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN        rc2;
    char             timebuf[128];
    char             datebuf[128];
    char             err_log_path[256];
    FILE             *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
    &NativeError,
                                Msg, sizeof(Msg) , &MsgLen )) !=
    SQL_NO_DATA )
    {
        if (total_db_errors >= MAX_SQL_ERRORS)
        {
            printf(">>>> Maximum SQL errors of %d exceeded.
Terminating TPCCLDR.<<<<\n",total_db_errors);
            exit(9);
        }
        total_db_errors++;

        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\nSQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)
            printf("ERROR:  Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
            fclose(fp1);
        }

        i++;
    }
}

//=====
//
// Function    : FormatDate
//
//=====
void FormatDate ( char* szTimeCOutput )

```

```

{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000", &when );

    return;
}

```

## tpcc\_neworder\_new.sql

```

-----
-- File:      TPCC_NEWORDER_NEW.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- This acid stored procedure implements the neworder
-- transaction. It outputs timestamps at the
-- beginning of the transaction, before the commit
-- delay, and after the commit.
-----
SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS OFF
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder_new' )
    DROP PROCEDURE tpcc_neworder_new
GO

-- neworder_new v2.5 6/23/05 PeterCa
-- lq stock/order_line/client. upd district & ins neworder.
-- cust/warehouse select together, ins order separate
-- uses rownumber to distinct w any transform
-- uses in-memory sort for distinct on iid,wid
-- uses charindex
-- will rollback if (@i_idX,@s_w_idX pairs not unique) OR (@i_idX not unique).

CREATE PROCEDURE tpcc_neworder_new
    @w_id int,
    @d_id tinyint,
    @c_id int,
    @o_ol_cnt tinyint,
    @o_all_local tinyint,
    @i_id1 int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i_id2 int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i_id3 int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i_id4 int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i_id5 int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,

```

```

    @i_id6 int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
    @i_id7 int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
    @i_id8 int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
    @i_id9 int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
    @i_id10 int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i_id11 int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i_id12 int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
    @i_id13 int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
    @i_id14 int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
    @i_id15 int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0

AS
BEGIN
DECLARE @o_id int,
        @d_tax smallmoney,
        @o_entry_d datetime,
        @commit_flag tinyint

BEGIN TRANSACTION n
-- get district tax and next available order id and update
-- insert corresponding row into new-order table
-- plus initialize local variables

UPDATE district
SET @d_tax = d_tax,
    @o_id = d_next_o_id,
    d_next_o_id = d_next_o_id + 1,
    @o_entry_d = GETDATE(),
    @commit_flag = 1
OUTPUT deleted.d_next_o_id,
        @d_id,
        @w_id
INTO new_order
WHERE d_w_id = @w_id AND
        d_id = @d_id

-- update stock from stock join (item join (params))
-- output to orderline, output to client
-- NOTE: @@rowcount != @ol_o_cnt
-- if (@i_idX,@s_w_idX pairs not unique) OR (@i_idX not unique).

UPDATE stock
SET s_ytd = s_ytd + info.ol_qty,
    s_quantity = s_quantity - info.ol_qty +
        CASE WHEN (s_quantity - info.ol_qty < 10) THEN 91 ELSE
0 END,
    s_order_cnt = s_order_cnt + 1,
    s_remote_cnt = s_remote_cnt +
        CASE WHEN (info.w_id = @w_id) THEN 0
ELSE 1 END

OUTPUT @o_id,
        @d_id,
        @w_id,
        info.lino,
        info.i_id,
        "dec 31, 1899",
        info.i_price * info.ol_qty,
        info.w_id,
        info.ol_qty,
        CASE @d_id WHEN 1 THEN inserted.s_dist_01
        WHEN 2 THEN inserted.s_dist_02

```

```

                WHEN 3 THEN inserted.s_dist_03
                WHEN 4 THEN inserted.s_dist_04
                WHEN 5 THEN inserted.s_dist_05
                WHEN 6 THEN inserted.s_dist_06
                WHEN 7 THEN inserted.s_dist_07
                WHEN 8 THEN inserted.s_dist_08
                WHEN 9 THEN inserted.s_dist_09
                WHEN 10 THEN inserted.s_dist_10
            END
        INTO order_line

        OUTPUT info.i_name,inserted.s_quantity,
        CASE WHEN ((charindex("ORIGINAL",info.i_data) > 0) AND
        (charindex("ORIGINAL",inserted.s_data) > 0) )
            THEN "B" ELSE "G" END,
        info.i_price,
        info.i_price*info.ol_qty
    FROM stock INNER JOIN
        (SELECT iid,
            wid,
                lino,
            ol_qty,
            i_price,
            i_name,
            i_data
        FROM (SELECT iid,
            wid,
            lino,
            qty,
                row_number() OVER (PARTITION BY iid,wid
        ORDER BY iid,wid)
        FROM (SELECT @i_id1,@s_w_id1,1,@ol_qty1 UNION ALL
        SELECT @i_id2,@s_w_id2,2,@ol_qty2 UNION ALL
        SELECT @i_id3,@s_w_id3,3,@ol_qty3 UNION ALL
        SELECT @i_id4,@s_w_id4,4,@ol_qty4 UNION ALL
        SELECT @i_id5,@s_w_id5,5,@ol_qty5 UNION ALL
        SELECT @i_id6,@s_w_id6,6,@ol_qty6 UNION ALL
        SELECT @i_id7,@s_w_id7,7,@ol_qty7 UNION ALL
        SELECT @i_id8,@s_w_id8,8,@ol_qty8 UNION ALL
        SELECT @i_id9,@s_w_id9,9,@ol_qty9 UNION ALL
        SELECT @i_id10,@s_w_id10,10,@ol_qty10 UNION ALL
        SELECT @i_id11,@s_w_id11,11,@ol_qty11 UNION ALL
        SELECT @i_id12,@s_w_id12,12,@ol_qty12 UNION ALL
        SELECT @i_id13,@s_w_id13,13,@ol_qty13 UNION ALL
        SELECT @i_id14,@s_w_id14,14,@ol_qty14 UNION ALL
        SELECT @i_id15,@s_w_id15,15,@ol_qty15) AS
        ) AS ol(iid,wid,lino,ol_qty,rownum)
        INNER JOIN
        item (repeatableread) ON i_id = iid AND -- filters
        out invalid items
            rownum = 1
        ) AS info(i_id,w_id,lino,ol_qty,i_price,i_name,i_data)
        ON s_i_id = info.i_id AND
        s_w_id = info.w_id

    IF (@@rowcount <> @o_ol_cnt) -- must have an invalid item
        SELECT @commit_flag = 0 -- 2.4.2.3 requires rest to proceed

    -- insert fresh row into orders table
    INSERT INTO orders VALUES (
        @o_id,
        @d_id,
        @w_id,

```

```

        @c_id,
        0,
        @o_ol_cnt,
        @o_all_local,
        @o_entry_d)

    -- get customer last name, discount, and credit rating
    -- get warehouse tax
    -- return order_data to client
    SELECT w_tax,
        @d_tax,
        @o_id,
        c_last,
        c_discount,
        c_credit,
        @o_entry_d,
        @commit_flag
    FROM warehouse(repeatableread),
        customer(repeatableread)
    WHERE w_id = @w_id AND
        c_id = @c_id AND
        c_w_id = @w_id AND
        c_d_id = @d_id

    -- @@rowcount checks that previous select found a valid customer
    IF (@@rowcount = 0)
    BEGIN
        RAISERROR('Invalid Customer ID', 11, 1 )
        ROLLBACK TRANSACTION n
    END
    ELSE IF (@commit_flag = 1)
        COMMIT TRANSACTION n
    ELSE -- all that work for nothing.
        ROLLBACK TRANSACTION n

    END
    GO

```

## VerifyTPCCLoad.sql

```

-----
-- File: VerifyTPCCLoad.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-----
SET NOCOUNT ON
PRINT ' '
SELECT CONVERT(CHAR(30), GETDATE(), 21)
PRINT ' '

USE tpcc
GO

IF EXISTS (SELECT name
    FROM sysobjects
    WHERE name = 'TPCC_INFO' AND
        type = 'U')

```

```

DROP TABLE TPCC_INFO
GO
PRINT 'WAREHOUSE TABLE'
SELECT count_big(*)
FROM warehouse
GO

PRINT 'DISTRICT TABLE = (10 * No of warehouses)'
SELECT count_big(*)
FROM district
GO

PRINT 'ITEM TABLE = 100,000'
SELECT count_big(*)
FROM item
GO

PRINT 'CUSTOMER TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM customer
GO

PRINT 'ORDERS TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM orders
GO

PRINT 'HISTORY TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM history
GO

PRINT 'STOCK TABLE = (100,000 * No of warehouses)'
SELECT count_big(*)
FROM stock
GO

PRINT 'ORDER_LINE TABLE = (300,000 * No of warehouses + some change)'
SELECT count_big(*)
FROM order_line
GO

PRINT 'NEW_ORDER TABLE = (9000 * No of warehouses)'
SELECT count_big(*)
FROM new_order
GO

CREATE TABLE TPCC_INFO
(
    INFO_DATE          datetime,
    NUM_WAREHOUSE      bigint,
    WAREHOUSE_TARGET   bigint,
    NUM_DISTRICT       bigint,
    DISTRICT_TARGET    bigint,
    NUM_ITEM            bigint,
    ITEM_TARGET        bigint,
    NUM_CUSTOMER       bigint,
    CUSTOMER_TARGET    bigint,
    NUM_ORDERS         bigint,
    ORDERS_TARGET      bigint,
    ORDERS_TARGET_LOW  bigint,
    ORDERS_TARGET_HIGH bigint,
    NUM_ORDER_LINE     bigint,
    ORDER_LINE_TARGET  bigint,

```

```

ORDER_LINE_TARGET_LOW  bigint,
ORDER_LINE_TARGET_HIGH bigint,
NUM_NEW_ORDER          bigint,
NEW_ORDER_TARGET       bigint,
NEW_ORDER_TARGET_LOW   bigint,
NEW_ORDER_TARGET_HIGH  bigint,
NUM_HISTORY            bigint,
HISTORY_TARGET         bigint,
NUM_STOCK              bigint,
STOCK_TARGET           bigint)
GO

DECLARE @NUM_WAREHOUSE      bigint,
        @WAREHOUSE_TARGET  bigint,
        @NUM_DISTRICT      bigint,
        @DISTRICT_TARGET   bigint,
        @NUM_ITEM          bigint,
        @ITEM_TARGET       bigint,
        @NUM_CUSTOMER      bigint,
        @CUSTOMER_TARGET   bigint,
        @NUM_ORDERS        bigint,
        @ORDERS_TARGET     bigint,
        @ORDERS_TARGET_LOW  bigint,
        @ORDERS_TARGET_HIGH  bigint,
        @NUM_ORDER_LINE    bigint,
        @ORDER_LINE_TARGET  bigint,
        @ORDER_LINE_TARGET_LOW  bigint,
        @ORDER_LINE_TARGET_HIGH  bigint,
        @NUM_NEW_ORDER     bigint,
        @NEW_ORDER_TARGET   bigint,
        @NEW_ORDER_TARGET_LOW  bigint,
        @NEW_ORDER_TARGET_HIGH  bigint,
        @NUM_HISTORY       bigint,
        @HISTORY_TARGET     bigint,
        @NUM_STOCK         bigint,
        @STOCK_TARGET      bigint

-- set the local variables prior to inserting them into the TPCC_INFO table
SELECT @NUM_WAREHOUSE = COUNT_BIG(*)
FROM warehouse

SELECT @NUM_DISTRICT = COUNT_BIG(*)
FROM district

SELECT @NUM_ITEM = COUNT_BIG(*)
FROM item

SELECT @NUM_CUSTOMER = COUNT_BIG(*)
FROM customer

SELECT @NUM_ORDERS = COUNT_BIG(*)
FROM orders

SELECT @NUM_ORDER_LINE = COUNT_BIG(*)
FROM order_line

SELECT @NUM_NEW_ORDER = COUNT_BIG(*)
FROM new_order

SELECT @NUM_HISTORY = COUNT_BIG(*)
FROM history

SELECT @NUM_STOCK = COUNT_BIG(*)

```

```

FROM stock

--- now calculate and set the target values
SELECT @WAREHOUSE_TARGET = @NUM_WAREHOUSE,
       @DISTRICT_TARGET   = @NUM_WAREHOUSE * 10,
       @ITEM_TARGET       = 100000,
       @CUSTOMER_TARGET   = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET     = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET_LOW = @ORDERS_TARGET - FLOOR(@ORDERS_TARGET * .01),
       @ORDERS_TARGET_HIGH = @ORDERS_TARGET + FLOOR(@ORDERS_TARGET * .01),
       @ORDER_LINE_TARGET = @NUM_WAREHOUSE * 300000,
       @ORDER_LINE_TARGET_LOW = @ORDER_LINE_TARGET - FLOOR(@ORDER_LINE_TARGET *
.01),
       @ORDER_LINE_TARGET_HIGH = @ORDER_LINE_TARGET + FLOOR(@ORDER_LINE_TARGET *
.01),
       @NEW_ORDER_TARGET   = @NUM_WAREHOUSE * 9000,
       @NEW_ORDER_TARGET_LOW = @NEW_ORDER_TARGET - FLOOR(@NEW_ORDER_TARGET *
.01),
       @NEW_ORDER_TARGET_HIGH = @NEW_ORDER_TARGET + FLOOR(@NEW_ORDER_TARGET *
.01),
       @HISTORY_TARGET     = @NUM_WAREHOUSE * 30000,
       @STOCK_TARGET       = @NUM_WAREHOUSE * 100000

--- insert the values into TPCC_INFO
INSERT INTO TPCC_INFO VALUES (GETDATE(),
                              @NUM_WAREHOUSE,
                              @WAREHOUSE_TARGET,
                              @NUM_DISTRICT,
                              @DISTRICT_TARGET,
                              @NUM_ITEM,
                              @ITEM_TARGET,
                              @NUM_CUSTOMER,
                              @CUSTOMER_TARGET,
                              @NUM_ORDERS,
                              @ORDERS_TARGET,
                              @ORDERS_TARGET_LOW,
                              @ORDERS_TARGET_HIGH,
                              @NUM_ORDER_LINE,
                              @ORDER_LINE_TARGET,
                              @ORDER_LINE_TARGET_LOW,
                              @ORDER_LINE_TARGET_HIGH,
                              @NUM_NEW_ORDER,
                              @NEW_ORDER_TARGET,
                              @NEW_ORDER_TARGET_LOW,
                              @NEW_ORDER_TARGET_HIGH,
                              @NUM_HISTORY,
                              @HISTORY_TARGET,
                              @NUM_STOCK,
                              @STOCK_TARGET)

GO

--- output the row counts from the build
PRINT ''
PRINT ''
PRINT '-----'
PRINT '| WAREHOUSE TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_WAREHOUSE AS 'Warehouse Rows',
  WAREHOUSE_TARGET AS 'Warehouse Target',
  CASE WHEN (NUM_WAREHOUSE = WAREHOUSE_TARGET)
    THEN 'OK!'
  ELSE 'ERROR!!!'

```

```

ELSE 'ERROR!!!'
AS 'Warehouse Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| DISTRICT TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_DISTRICT AS 'District Rows',
  DISTRICT_TARGET AS 'District Target',
  CASE WHEN (NUM_DISTRICT = DISTRICT_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
AS 'District Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ITEM TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_ITEM AS 'Item Rows',
  ITEM_TARGET AS 'Item Target',
  CASE WHEN (NUM_ITEM = ITEM_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
AS 'Item Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| CUSTOMER TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_CUSTOMER AS 'Customer Rows',
  CUSTOMER_TARGET AS 'Customer Target',
  CASE WHEN (NUM_CUSTOMER = CUSTOMER_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
AS 'Customer Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDERS TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_ORDERS AS 'Orders Rows',
  ORDERS_TARGET AS 'Orders Target',
  CASE WHEN (NUM_ORDERS = ORDERS_TARGET)

```

```

        THEN 'OK!'
        WHEN (NUM_ORDERS BETWEEN ORDERS_TARGET_LOW AND ORDERS_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!'
    END
    AS 'Orders Message'
FROM    TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDER LINE TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_ORDER_LINE AS 'Order Line Rows',
    ORDER_LINE_TARGET AS 'Order Line Target',
    CASE WHEN (NUM_ORDER_LINE = ORDER_LINE_TARGET)
        THEN 'OK!'
        WHEN (NUM_ORDER_LINE BETWEEN ORDER_LINE_TARGET_LOW AND
ORDER_LINE_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!'
    END
    AS 'Order Line Message'
FROM    TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| NEW ORDER TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_NEW_ORDER AS 'New Order Rows',
    NEW_ORDER_TARGET AS 'New Order Target',
    CASE WHEN (NUM_NEW_ORDER = NEW_ORDER_TARGET)
        THEN 'OK!'
        WHEN (NUM_NEW_ORDER BETWEEN NEW_ORDER_TARGET_LOW AND
NEW_ORDER_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!'
    END
    AS 'New Order Message'
FROM    TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| HISTORY TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_HISTORY AS 'History Rows',
    HISTORY_TARGET AS 'History Target',
    CASE WHEN (NUM_HISTORY = HISTORY_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!'
    END
    AS 'History Message'
FROM    TPCC_INFO
GO

PRINT ''

```

```

PRINT ''
PRINT '-----'
PRINT '| STOCK TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_STOCK AS 'Stock Rows',
    STOCK_TARGET AS 'Stock Target',
    CASE WHEN (NUM_STOCK = STOCK_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!'
    END
    AS 'Stock Message'
FROM    TPCC_INFO
GO

-----
-- Check Indexes
-----

USE tpcc
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| TPC-C INDEXES |'
PRINT '-----'
EXEC sp_helpindex warehouse
EXEC sp_helpindex district
EXEC sp_helpindex item
EXEC sp_helpindex customer
EXEC sp_helpindex orders
EXEC sp_helpindex order_line
EXEC sp_helpindex new_order
EXEC sp_helpindex history
EXEC sp_helpindex stock
GO

```

---

## VerifyTPCCLoad\_2.sql

---

```

-----
-- File: VerifyTPCCLoad.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-----

SET NOCOUNT ON
PRINT ''
SELECT CONVERT(CHAR(30), GETDATE(), 21)
PRINT ''
GO

USE tpcc
GO

IF EXISTS (SELECT name
          FROM sysobjects
          WHERE name = 'TPCC_INFO' AND
                type = 'U')
    DROP TABLE TPCC_INFO

```



```

GO

CREATE TABLE TPCC_INFO
(
  INFO_DATE          datetime,
  NUM_WAREHOUSE     bigint,
  WAREHOUSE_TARGET  bigint,
  NUM_DISTRICT      bigint,
  DISTRICT_TARGET   bigint,
  NUM_ITEM          bigint,
  ITEM_TARGET       bigint,
  NUM_CUSTOMER      bigint,
  CUSTOMER_TARGET   bigint,
  NUM_ORDERS        bigint,
  ORDERS_TARGET     bigint,
  ORDERS_TARGET_LOW bigint,
  ORDERS_TARGET_HIGH  bigint,
  NUM_ORDER_LINE    bigint,
  ORDER_LINE_TARGET  bigint,
  ORDER_LINE_TARGET_LOW  bigint,
  ORDER_LINE_TARGET_HIGH  bigint,
  NUM_NEW_ORDER     bigint,
  NEW_ORDER_TARGET  bigint,
  NEW_ORDER_TARGET_LOW  bigint,
  NEW_ORDER_TARGET_HIGH  bigint,
  NUM_HISTORY       bigint,
  HISTORY_TARGET    bigint,
  NUM_STOCK         bigint,
  STOCK_TARGET      bigint)

GO

DECLARE @NUM_WAREHOUSE      bigint,
        @WAREHOUSE_TARGET  bigint,
        @NUM_DISTRICT      bigint,
        @DISTRICT_TARGET   bigint,
        @NUM_ITEM          bigint,
        @ITEM_TARGET       bigint,
        @NUM_CUSTOMER      bigint,
        @CUSTOMER_TARGET   bigint,
        @NUM_ORDERS        bigint,
        @ORDERS_TARGET     bigint,
        @ORDERS_TARGET_LOW  bigint,
        @ORDERS_TARGET_HIGH  bigint,
        @NUM_ORDER_LINE    bigint,
        @ORDER_LINE_TARGET  bigint,
        @ORDER_LINE_TARGET_LOW  bigint,
        @ORDER_LINE_TARGET_HIGH  bigint,
        @NUM_NEW_ORDER     bigint,
        @NEW_ORDER_TARGET  bigint,
        @NEW_ORDER_TARGET_LOW  bigint,
        @NEW_ORDER_TARGET_HIGH  bigint,
        @NUM_HISTORY       bigint,
        @HISTORY_TARGET    bigint,
        @NUM_STOCK         bigint,
        @STOCK_TARGET      bigint

SELECT @NUM_WAREHOUSE = COUNT_BIG(*)
FROM   warehouse

SELECT @NUM_DISTRICT = COUNT_BIG(*)
FROM   district

SELECT @NUM_ITEM = COUNT_BIG(*)
FROM   item

```

```

SELECT @NUM_CUSTOMER = COUNT_BIG(*)
FROM   customer

SELECT @NUM_ORDERS = COUNT_BIG(*)
FROM   orders

SELECT @NUM_HISTORY = COUNT_BIG(*)
FROM   history

SELECT @NUM_STOCK = COUNT_BIG(*)
FROM   stock

SELECT @NUM_ORDER_LINE = COUNT_BIG(*)
FROM   order_line

SELECT @NUM_NEW_ORDER = COUNT_BIG(*)
FROM   new_order

--- now calculate and set the target values
SELECT @WAREHOUSE_TARGET = @NUM_WAREHOUSE,
       @DISTRICT_TARGET  = @NUM_WAREHOUSE * 10,
       @ITEM_TARGET       = 100000,
       @CUSTOMER_TARGET   = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET     = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET_LOW = @ORDERS_TARGET - FLOOR(@ORDERS_TARGET * .01),
       @ORDERS_TARGET_HIGH = @ORDERS_TARGET + FLOOR(@ORDERS_TARGET * .01),
       @ORDER_LINE_TARGET = @NUM_WAREHOUSE * 300000,
       @ORDER_LINE_TARGET_LOW = @ORDER_LINE_TARGET - FLOOR(@ORDER_LINE_TARGET *
.01),
       @ORDER_LINE_TARGET_HIGH = @ORDER_LINE_TARGET + FLOOR(@ORDER_LINE_TARGET *
.01),
       @NEW_ORDER_TARGET = @NUM_WAREHOUSE * 9000,
       @NEW_ORDER_TARGET_LOW = @NEW_ORDER_TARGET - FLOOR(@NEW_ORDER_TARGET *
.01),
       @NEW_ORDER_TARGET_HIGH = @NEW_ORDER_TARGET + FLOOR(@NEW_ORDER_TARGET *
.01),
       @HISTORY_TARGET    = @NUM_WAREHOUSE * 30000,
       @STOCK_TARGET      = @NUM_WAREHOUSE * 100000

--- insert the values into TPCC_INFO
INSERT INTO TPCC_INFO VALUES (GETDATE(),
                              @NUM_WAREHOUSE,
                              @WAREHOUSE_TARGET,
                              @NUM_DISTRICT,
                              @DISTRICT_TARGET,
                              @NUM_ITEM,
                              @ITEM_TARGET,
                              @NUM_CUSTOMER,
                              @CUSTOMER_TARGET,
                              @NUM_ORDERS,
                              @ORDERS_TARGET,
                              @ORDERS_TARGET_LOW,
                              @ORDERS_TARGET_HIGH,
                              @NUM_ORDER_LINE,
                              @ORDER_LINE_TARGET,
                              @ORDER_LINE_TARGET_LOW,
                              @ORDER_LINE_TARGET_HIGH,
                              @NUM_NEW_ORDER,
                              @NEW_ORDER_TARGET,
                              @NEW_ORDER_TARGET_LOW,
                              @NEW_ORDER_TARGET_HIGH,
                              @NUM_HISTORY,

```

```

                @HISTORY_TARGET,
                @NUM_STOCK,
                @STOCK_TARGET)
GO

--- output the row counts from the build
PRINT ''
PRINT ''
PRINT '-----'
PRINT '| WAREHOUSE TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_WAREHOUSE AS 'Warehouse Rows',
  WAREHOUSE_TARGET AS 'Warehouse Target',
  CASE WHEN (NUM_WAREHOUSE = WAREHOUSE_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
  END AS 'Warehouse Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| DISTRICT TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_DISTRICT AS 'District Rows',
  DISTRICT_TARGET AS 'District Target',
  CASE WHEN (NUM_DISTRICT = DISTRICT_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
  END AS 'District Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ITEM TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_ITEM AS 'Item Rows',
  ITEM_TARGET AS 'Item Target',
  CASE WHEN (NUM_ITEM = ITEM_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
  END AS 'Item Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| CUSTOMER TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_CUSTOMER AS 'Customer Rows',
  CUSTOMER_TARGET AS 'Customer Target',

```

```

  CASE WHEN (NUM_CUSTOMER = CUSTOMER_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
  END AS 'Customer Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDERS TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_ORDERS AS 'Orders Rows',
  ORDERS_TARGET AS 'Orders Target',
  CASE WHEN (NUM_ORDERS = ORDERS_TARGET)
    THEN 'OK!'
    WHEN (NUM_ORDERS BETWEEN ORDERS_TARGET_LOW AND ORDERS_TARGET_HIGH)
    THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!'
  END AS 'Orders Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDER LINE TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_ORDER_LINE AS 'Order Line Rows',
  ORDER_LINE_TARGET AS 'Order Line Target',
  CASE WHEN (NUM_ORDER_LINE = ORDER_LINE_TARGET)
    THEN 'OK!'
    WHEN (NUM_ORDER_LINE BETWEEN ORDER_LINE_TARGET_LOW AND
ORDER_LINE_TARGET_HIGH)
    THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!'
  END AS 'Order Line Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| NEW ORDER TABLE |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_NEW_ORDER AS 'New Order Rows',
  NEW_ORDER_TARGET AS 'New Order Target',
  CASE WHEN (NUM_NEW_ORDER = NEW_ORDER_TARGET)
    THEN 'OK!'
    WHEN (NUM_NEW_ORDER BETWEEN NEW_ORDER_TARGET_LOW AND
NEW_ORDER_TARGET_HIGH)
    THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!'
  END AS 'New Order Message'
FROM TPCC_INFO
GO

```

```

PRINT ''
PRINT ''
PRINT '-----'
PRINT '|      HISTORY TABLE      |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_HISTORY AS 'History Rows',
  HISTORY_TARGET AS 'History Target',
  CASE WHEN (NUM_HISTORY = HISTORY_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
  END AS 'History Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '|      STOCK TABLE      |'
PRINT '-----'
SELECT TOP 1
  CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
  NUM_STOCK AS 'Stock Rows',
  STOCK_TARGET AS 'Stock Target',
  CASE WHEN (NUM_STOCK = STOCK_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
  END AS 'Stock Message'
FROM TPCC_INFO
GO

-----
-- Check Indexes
-----
USE tpcc
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '|      TPC-C INDEXES      |'
PRINT '-----'
EXEC sp_helpindex warehouse
EXEC sp_helpindex district
EXEC sp_helpindex item
EXEC sp_helpindex customer
EXEC sp_helpindex orders
EXEC sp_helpindex order_line
EXEC sp_helpindex new_order
EXEC sp_helpindex history
EXEC sp_helpindex stock
GO

```

---

## version.sql

---

```

-----
-- File:  VERSION.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-----

```

```

-- Copyright Microsoft, 2006
--
-- Returns version level of TPC-C stored procs
--
-- Always update the return value of this proc for
-- any interface changes or 'must have' bug fixes.
--
-- The value returned by this SP defines the
-- 'interface level', which must match between the
-- stored procs and the client code. The
-- interface level may be down rev from the
-- current kit. This indicates that the interface
-- hasn't changed since that version.
--
-- Interface Level: 4.20.000
-----
USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_version' )
  DROP PROCEDURE tpcc_version
GO

CREATE PROCEDURE tpcc_version
AS
DECLARE @version char(8)

BEGIN
  SELECT @version = '4.20.000'

  SELECT @version AS 'Version'
END
GO

```

## Appendix C: Tunable Parameters

---

### Benchcraft Profile

---

Profile: violet\_22080  
File Path: C:\Program  
Files\BenchCraft\violet\_22080.xml  
Version: 5

Number of Engines: 16

Name: rte1  
Description:  
Directory: c:\blog\rte1.log  
Machine: n61  
Parameter Set: 2.2  
Index: 120000000  
Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER44265281  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: rte2  
Description:  
Directory: c:\blog\rte2.log  
Machine: n61  
Parameter Set: 2.2  
Index: 20000000  
Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER3439676359  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: rte3  
Description:  
Directory: c:\blog\rte3.log  
Machine: n62  
Parameter Set: 2.2  
Index: 40000000

Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER5-418577843  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: rte4  
Description:  
Directory: c:\blog\rte4.log  
Machine: n62  
Parameter Set: 2.2  
Index: 60000000  
Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER7259371328  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: rte5  
Description:  
Directory: c:\blog\rte5.log  
Machine: n63  
Parameter Set: 2.2  
Index: 160000000  
Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER10-2043812625  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: rte6  
Description:  
Directory: c:\blog\rte6.log  
Machine: n63  
Parameter Set: 2.2  
Index: 170000000  
Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER11-2043703968  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 0  
Additional Options:

Name: rte7

Description:  
Directory: c:\blog\rte7.log  
Machine: n64  
Parameter Set: 2.2  
Index: 180000000  
Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER12-2043647406  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: rte8  
Description:  
Directory: c:\blog\rte8.log  
Machine: N64  
Parameter Set: 2.2  
Index: 70000000  
Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER8-1223518029  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: rte9  
Description:  
Directory: c:\blog\rte9.log  
Machine: n70  
Parameter Set: 2.2  
Index: 80000000  
Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER9108500  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0  
CLIENT\_NURAND: 25  
CPU: 1  
Additional Options:

Name: rte10  
Description:  
Directory: c:\blog\rte10.log  
Machine: n70  
Parameter Set: 2.2  
Index: 90000000  
Seed: 4678  
Configured Users: 13800  
Pipe Name: DRIVER10148640  
Connect Rate: 10  
Start Rate: 0  
Max. Concurrency: 0  
Concurrency Rate: 0

CLIENT\_NURAND: 25  
 CPU: 1  
 Additional Options:

Name: rtel1  
 Description:  
 Directory: c:\blog\rtel1.log  
 Machine: n71  
 Parameter Set: 2.2  
 Index: 100000000  
 Seed: 4678  
 Configured Users: 13800  
 Pipe Name: DRIVER11174093  
 Connect Rate: 10  
 Start Rate: 0  
 Max. Concurrency: 0  
 Concurrency Rate: 0  
 CLIENT\_NURAND: 25  
 CPU: 0  
 Additional Options:

Name: rtel2  
 Description:  
 Directory: c:\blog\rtel2.log  
 Machine: n71  
 Parameter Set: 2.2  
 Index: 110000000  
 Seed: 4678  
 Configured Users: 13800  
 Pipe Name: DRIVER12197250  
 Connect Rate: 10  
 Start Rate: 0  
 Max. Concurrency: 0  
 Concurrency Rate: 0  
 CLIENT\_NURAND: 25  
 CPU: 0  
 Additional Options:

Name: rtel3  
 Description:  
 Directory: c:\blog\rtel3.log  
 Machine: n72  
 Parameter Set: 2.2  
 Index: 190000000  
 Seed: 4678  
 Configured Users: 13800  
 Pipe Name: DRIVER13222046  
 Connect Rate: 10  
 Start Rate: 0  
 Max. Concurrency: 0  
 Concurrency Rate: 0  
 CLIENT\_NURAND: 25  
 CPU: 1  
 Additional Options:

Name: rtel4  
 Description:  
 Directory: c:\blog\rtel4.log  
 Machine: n72  
 Parameter Set: 2.2  
 Index: 130000000  
 Seed: 4678  
 Configured Users: 13800

Pipe Name: DRIVER14242984  
 Connect Rate: 10  
 Start Rate: 0  
 Max. Concurrency: 0  
 Concurrency Rate: 0  
 CLIENT\_NURAND: 25  
 CPU: 1  
 Additional Options:

Name: rtel5  
 Description:  
 Directory: c:\blog\rtel5.log  
 Machine: n61  
 Parameter Set: 2.2  
 Index: 140000000  
 Seed: 4678  
 Configured Users: 13800  
 Pipe Name: DRIVER153651031  
 Connect Rate: 10  
 Start Rate: 0  
 Max. Concurrency: 0  
 Concurrency Rate: 0  
 CLIENT\_NURAND: 25  
 CPU: 2  
 Additional Options:

Name: rtel6  
 Description:  
 Directory: c:\blog\rtel6.log  
 Machine: n62  
 Parameter Set: 2.2  
 Index: 150000000  
 Seed: 4678  
 Configured Users: 13800  
 Pipe Name: DRIVER163671781  
 Connect Rate: 10  
 Start Rate: 0  
 Max. Concurrency: 0  
 Concurrency Rate: 0  
 CLIENT\_NURAND: 25  
 CPU: 2  
 Additional Options:

Driver Engine: rte1  
 IIS Server: cr97  
 SQL Server: olaf  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 1 - 1380  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte2  
 IIS Server: cr97  
 SQL Server: olaf  
 Database: tpcc

Number of User groups: 16

User: sa  
 Protocol: HTML  
 w\_id Range: 1381 - 2760  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte3  
 IIS Server: cr98  
 SQL Server: olaf  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 2761 - 4140  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte4  
 IIS Server: cr98  
 SQL Server: olaf  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 4141 - 5520  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte5  
 IIS Server: cr99  
 SQL Server: olaf  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 5521 - 6900  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte6  
 IIS Server: cr99  
 SQL Server: phantom  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 6901 - 8280  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800

District id: 1  
 Scale Down: No

Driver Engine: rte7  
 IIS Server: cr100  
 SQL Server: olaf  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 8281 - 9660  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte8  
 IIS Server: cr100  
 SQL Server: olaf  
 Database: tpcc  
 User: sa  
 Protocol: HTML  
 w\_id Range: 9661 - 11040  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte9  
 IIS Server: cr101  
 SQL Server:  
 Database:  
 User:  
 Protocol: HTML  
 w\_id Range: 11041 - 12420  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte10  
 IIS Server: cr101  
 SQL Server:  
 Database:  
 User:  
 Protocol: HTML  
 w\_id Range: 12421 - 13800  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte11  
 IIS Server: cr102  
 SQL Server:  
 Database:

User:  
 Protocol: HTML  
 w\_id Range: 13801 - 15180  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte12  
 IIS Server: cr102  
 SQL Server:  
 Database:  
 User:  
 Protocol: HTML  
 w\_id Range: 15181 - 16560  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte13  
 IIS Server: cr103  
 SQL Server:  
 Database:  
 User:  
 Protocol: HTML  
 w\_id Range: 16561 - 17940  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte14  
 IIS Server: cr103  
 SQL Server:  
 Database:  
 User:  
 Protocol: HTML  
 w\_id Range: 17941 - 19320  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Driver Engine: rte15  
 IIS Server: cr146  
 SQL Server:  
 Database:  
 User:  
 Protocol: HTML  
 w\_id Range: 19321 - 20700  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800

District id: 1  
 Scale Down: No

Driver Engine: rte16  
 IIS Server: cr146  
 SQL Server:  
 Database:  
 User:  
 Protocol: HTML  
 w\_id Range: 20701 - 22080  
 w\_id Min Warehouse: 1  
 w\_id Max Warehouse: 22080  
 Scale: Normal  
 User Count: 13800  
 District id: 1  
 Scale Down: No

Number of Parameter Sets: 66

~Default  
 Default Parameter Set

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	10.00	
12.05	18.01	0.10	5.00	10.00	0.10
12.05	3.01	0.10	5.00	10.00	0.10
5.05	2.01	0.10	5.00	1.00	0.10
5.05	2.01	0.10	20.00	1.00	0.10
10.05	2.01	0.10	5.00	1.00	0.10

Tuned Distribution

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
12.05	18.01	0.10	5.00	43.10	0.10
12.05	3.01	0.10	5.00	4.05	0.10
5.05	2.01	0.10	5.00	4.05	0.10
5.05	2.01	0.10	20.00	4.05	0.10
10.05	2.01	0.10	5.00	4.05	0.10

No Think

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	10.00	
0.00	0.00	0.00	5.00	0.00	

0.00	0.00	0.00	5.00	0.00	10.00
0.00	0.00	0.00	5.00	1.00	0.00
0.00	0.00	0.00	20.00	0.00	1.00
0.00	0.00	0.00	5.00	0.00	1.00

95%

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
13.00	18.01		New Order	44.75	0.10
13.00	3.01		Payment	43.10	0.10
6.00	2.01		Delivery	4.05	0.10
6.00	2.01		Stock Level	4.05	0.10
11.00	2.01		Order Status	4.05	0.10

90%

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
16.00	18.01		New Order	44.83	0.10
16.00	3.01		Payment	43.05	0.10
9.00	2.01		Delivery	4.04	0.10
9.00	2.01		Stock Level	4.04	0.10
14.00	2.01		Order Status	4.04	0.10

3.0

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
36.15	0.00		New Order	44.75	0.10
36.15	0.00		Payment	43.10	0.10
15.15	0.00		Delivery	4.05	0.10
15.15	0.00		Stock Level	4.05	0.10
30.15	0.00		Order Status	4.05	0.10

4.0

4.0 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
48.20	18.01		New Order	44.75	0.10
48.20	3.01		Payment	43.10	0.10
20.20	2.01		Delivery	4.05	0.10
20.20	2.01		Stock Level	4.05	0.10
40.20	2.01		Order Status	4.05	0.10

3.8  
3.8 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
45.70	18.01		New Order	44.75	0.10
45.70	3.01		Payment	43.10	0.10
19.10	2.01		Delivery	4.05	0.10
19.10	2.01		Stock Level	4.05	0.10
38.10	2.01		Order Status	4.05	0.10

3.6  
3.6 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
43.30	18.01		New Order	44.75	0.10
43.30	3.01		Payment	43.10	0.10
18.10	2.01		Delivery	4.05	0.10
18.10	2.01		Stock Level	4.05	0.10
36.18	2.01		Order Status	4.05	0.10

3.4  
3.4 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
40.90	18.01		New Order	44.75	0.10
40.90	3.01		Payment	43.10	0.10
17.10	2.01		Delivery	4.05	0.10
17.10	2.01		Stock Level	4.05	0.10

17.10	2.01		Order Status	4.05	0.10
			3.2		
			3.2 tt		

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
38.50	18.01		New Order	44.75	0.10
38.50	3.01		Payment	43.10	0.10
16.10	2.01		Delivery	4.05	0.10
16.10	2.01		Stock Level	4.05	0.10
32.10	2.01		Order Status	4.05	0.10

2.8  
2.8 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
33.74	18.01		New Order	44.75	0.10
33.74	3.01		Payment	43.10	0.10
14.14	2.01		Delivery	4.05	0.10
14.14	2.01		Stock Level	4.05	0.10
28.14	2.01		Order Status	4.05	0.10

2.6  
2.6 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
31.30	18.01		New Order	44.75	0.10
31.30	3.01		Payment	43.10	0.10
13.10	2.01		Delivery	4.05	0.10
13.10	2.01		Stock Level	4.05	0.10
26.10	2.01		Order Status	4.05	0.10

2.4  
2.4 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
28.90	18.01		New Order	44.75	0.10

28.90	3.01		Payment	43.10		
			0.10	5.00	0.10	
12.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
12.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
24.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.2			
			2.2 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
28.90	18.01		New Order	44.75		
			0.10	5.00	0.10	
28.90	3.01		Payment	43.10		
			0.10	5.00	0.10	
12.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
12.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
24.12	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			2.0			
			2.0 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
24.10	18.01		New Order	44.75		
			0.10	5.00	0.10	
24.10	3.01		Payment	43.10		
			0.10	5.00	0.10	
10.10	2.01		Delivery	4.05		
			0.10	5.00	0.10	
10.10	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
20.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			5.0			
			5.0 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
60.25	18.01		New Order	44.75		
			0.10	5.00	0.10	
60.25	3.01		Payment	43.10		
			0.10	5.00	0.10	
25.25	2.01		Delivery	4.05		
			0.10	5.00	0.10	
25.25	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
50.25	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			4.5			
			4.5 tt			

Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
54.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
54.20	3.01		Payment	43.10		
			0.10	5.00	0.10	
22.70	2.01		Delivery	4.05		
			0.10	5.00	0.10	
22.70	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
45.20	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			3.5			
			3.5 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
42.10	18.01		New Order	44.75		
			0.10	5.00	0.10	
42.10	3.01		Payment	43.10		
			0.10	5.00	0.10	
17.60	2.01		Delivery	4.05		
			0.10	5.00	0.10	
17.60	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
35.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.8			
			1.8 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
21.60	18.01		New Order	44.75		
			0.10	5.00	0.10	
21.60	3.01		Payment	43.10		
			0.10	5.00	0.10	
9.09	2.01		Delivery	4.05		
			0.10	5.00	0.10	
9.09	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
18.09	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			4.2			
			4.2 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
54.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
54.20	3.01		Payment	43.10		
			0.10	5.00	0.10	
22.70	2.01		Delivery	4.05		
			0.10	5.00	0.10	
22.70	2.01		Stock Level	4.05		
			0.10	20.00	0.10	

45.20	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.6			
			1.6 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
19.20	18.01		New Order	44.75		
			0.10	5.00	0.10	
19.20	3.01		Payment	43.10		
			0.10	5.00	0.10	
8.08	2.01		Delivery	4.05		
			0.10	5.00	0.10	
8.08	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
16.08	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.4			
			1.4 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
16.87	18.01		New Order	44.75		
			0.10	5.00	0.10	
16.87	3.01		Payment	43.10		
			0.10	5.00	0.10	
7.07	2.01		Delivery	4.05		
			0.10	5.00	0.10	
7.07	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
14.07	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.2			
			1.2 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
14.46	18.01		New Order	44.83		
			0.10	5.00	0.10	
14.46	3.01		Payment	43.05		
			0.10	5.00	0.10	
6.06	2.01		Delivery	4.04		
			0.10	5.00	0.10	
6.06	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
12.06	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			3.5			
			3.5 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
42.10	18.01		New Order	44.75		
			0.10	5.00	0.10	



42.10	3.01		Payment	43.10		
			0.10	5.00	0.10	
17.60	2.01		Delivery	4.05		
			0.10	5.00	0.10	
17.60	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
35.10	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.9			
			1.9 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
22.89	18.01		New Order	44.75		
			0.10	5.00	0.10	
22.89	3.01		Payment	43.10		
			0.10	5.00	0.10	
9.59	2.01		Delivery	4.05		
			0.10	5.00	0.10	
9.59	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
19.09	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.1			
			1.1 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.25	18.01		New Order	44.83		
			0.10	5.00	0.10	
13.25	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.55	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.55	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
11.05	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.05 better			
			1.05 tt better			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.65	18.01		New Order	44.92		
			0.10	5.00	0.10	
12.65	3.01		Payment	43.01		
			0.10	5.00	0.10	
5.30	2.01		Delivery	4.02		
			0.10	5.00	0.10	
5.30	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
10.55	2.01		Order Status	4.02		
			0.10	5.00	0.10	
			1.09			
			1.09 tt			

Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.13	18.01		New Order	44.83		
			0.10	5.00	0.10	
13.13	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.50	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.50	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.95	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.08			
			1.08 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.01	18.01		New Order	44.83		
			0.10	5.00	0.10	
13.01	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.45	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.45	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.85	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.07			
			1.07 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.89	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.89	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.40	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.40	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
10.75	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.06			
			1.06 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
12.77	18.01		New Order	44.83		
			0.10	5.00	0.10	
12.77	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.35	2.01		Delivery	4.04		
			0.10	5.00	0.10	
5.35	2.01		Stock Level	4.04		
			0.10	20.00	0.10	

10.65	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.15			
			1.15 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.85	18.01		New Order	44.75		
			0.10	5.00	0.10	
13.85	3.01		Payment	43.10		
			0.10	5.00	0.10	
5.80	2.01		Delivery	4.05		
			0.10	5.00	0.10	
5.80	2.01		Stock Level	4.05		
			0.10	20.00	0.10	
11.55	2.01		Order Status	4.05		
			0.10	5.00	0.10	
			1.25			
			1.25 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
15.06	18.01		New Order	44.83		
			0.10	5.00	0.10	
15.06	3.01		Payment	43.05		
			0.10	5.00	0.10	
6.31	2.01		Delivery	4.04		
			0.10	5.00	0.10	
6.31	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
12.56	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.3			
			1.3 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
15.66	18.01		New Order	44.83		
			0.10	5.00	0.10	
15.66	3.01		Payment	43.05		
			0.10	5.00	0.10	
6.56	2.01		Delivery	4.04		
			0.10	5.00	0.10	
6.56	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
13.06	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.12			
			1.12 tt			
Key	RT	RT	Menu	Txn	Think	
				Weight	Time	
Time	Delay	Fence	Delay			
13.49	18.01		New Order	44.75		
			0.10	5.00	0.10	

13.49	3.01	Payment	43.10		
		0.10	5.00	0.10	
5.65	2.01	Delivery	4.05		
		0.10	5.00	0.10	
5.65	2.01	Stock Level	4.05		
		0.10	20.00	0.10	
11.25	2.01	Order Status	4.05		
		0.10	5.00	0.10	
		1.18			
		1.18 tt			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.75	
14.21	18.01	0.10	5.00	0.10	
			Payment	43.10	
14.21	3.01	0.10	5.00	0.10	
			Delivery	4.05	
5.95	2.01	0.10	5.00	0.10	
			Stock Level	4.05	
5.95	2.01	0.10	20.00	0.10	
			Order Status	4.05	
11.85	2.01	0.10	5.00	0.10	
		1.22			
		1.22 tt			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.75	
14.70	18.01	0.10	5.00	0.10	
			Payment	43.10	
14.70	3.01	0.10	5.00	0.10	
			Delivery	4.05	
6.16	2.01	0.10	5.00	0.10	
			Stock Level	4.05	
6.16	2.01	0.10	20.00	0.10	
			Order Status	4.05	
12.26	2.01	0.10	5.00	0.10	
		1.28			
		1.28 tt			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.75	
15.42	18.01	0.10	5.00	0.10	
			Payment	43.10	
15.42	3.01	0.10	5.00	0.10	
			Delivery	4.05	
6.46	2.01	0.10	5.00	0.10	
			Stock Level	4.05	
6.46	2.01	0.10	20.00	0.10	
			Order Status	4.05	
12.86	2.01	0.10	5.00	0.10	
		1.04			
		1.04 tt			

Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.83	
12.53	18.01	0.10	5.00	0.10	
			Payment	43.05	
12.53	3.01	0.10	5.00	0.10	
			Delivery	4.04	
5.25	2.01	0.10	5.00	0.10	
			Stock Level	4.04	
5.25	2.01	0.10	20.00	0.10	
			Order Status	4.04	
10.45	2.01	0.10	5.00	0.10	
		1.03			
		1.03 tt			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.83	
12.41	18.01	0.10	5.00	0.10	
			Payment	43.05	
12.41	3.01	0.10	5.00	0.10	
			Delivery	4.04	
5.20	2.01	0.10	5.00	0.10	
			Stock Level	4.04	
5.20	2.01	0.10	20.00	0.10	
			Order Status	4.04	
10.35	2.01	0.10	5.00	0.10	
		1.02			
		1.02 tt			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.83	
12.29	18.01	0.10	5.00	0.10	
			Payment	43.05	
12.29	3.01	0.10	5.00	0.10	
			Delivery	4.04	
5.15	2.01	0.10	5.00	0.10	
			Stock Level	4.04	
5.15	2.01	0.10	20.00	0.10	
			Order Status	4.04	
10.25	2.01	0.10	5.00	0.10	
		1.01			
		1.01 tt			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.83	
12.17	18.01	0.10	5.00	0.10	
			Payment	43.05	
12.17	3.01	0.10	5.00	0.10	
			Delivery	4.04	
5.10	2.01	0.10	5.00	0.10	
			Stock Level	4.04	
5.10	2.01	0.10	20.00	0.10	

10.15	2.01	Order Status	4.04		
		0.10	5.00	0.10	
		1.005_best			
		1.005 tt best			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.88	
12.11	18.01	0.10	5.00	0.10	
			Payment	43.02	
12.11	3.01	0.10	5.00	0.10	
			Delivery	4.03	
5.07	2.01	0.10	5.00	0.10	
			Stock Level	4.03	
5.07	2.01	0.10	20.00	0.10	
			Order Status	4.03	
10.10	2.01	0.10	5.00	0.10	
		1.001_best			
		1.001 tt best			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.90	
12.06	18.01	0.10	5.00	0.10	
			Payment	43.05	
12.06	3.01	0.10	5.00	0.10	
			Delivery	4.01	
5.06	2.01	0.10	5.00	0.10	
			Stock Level	4.01	
5.06	2.01	0.10	20.00	0.10	
			Order Status	4.04	
10.06	2.01	0.10	5.00	0.10	
		1.03_better			
		1.03 tt more aggressive			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.92	
12.41	18.01	0.10	5.00	0.10	
			Payment	43.01	
12.41	3.01	0.10	5.00	0.10	
			Delivery	4.02	
5.20	2.01	0.10	5.00	0.10	
			Stock Level	4.03	
5.20	2.01	0.10	20.00	0.10	
			Order Status	4.02	
10.35	2.01	0.10	5.00	0.10	
		1.005_better			
		1.005 tt more aggressive			
Key	RT	RT	Menu	Txn	Think
				Weight	Time
Time	Delay	Fence	Delay		
			New Order	44.90	
12.11	18.01	0.10	5.00	0.10	

Key	RT	RT	Menu	Txn	Think
				43.05	
12.11	3.01		Payment	5.00	0.10
			0.10		
5.07	2.01		Delivery	5.00	0.10
			0.10		
5.07	2.01		Stock Level	20.00	0.10
			0.10		
10.10	2.01		Order Status	5.00	0.10
			0.10		
			1.02 better		
			1.02 tt more aggressive		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
12.29	18.01		New Order	5.00	0.10
			0.10		
12.29	3.01		Payment	5.00	0.10
			0.10		
5.15	2.01		Delivery	5.00	0.10
			0.10		
5.15	2.01		Stock Level	20.00	0.10
			0.10		
10.25	2.01		Order Status	5.00	0.10
			0.10		
			1.01 best		
			1.01 tt best		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
12.17	18.01		New Order	5.00	0.10
			0.10		
12.17	3.01		Payment	5.00	0.10
			0.10		
5.10	2.01		Delivery	5.00	0.10
			0.10		
5.10	2.01		Stock Level	20.00	0.10
			0.10		
10.15	2.01		Order Status	5.00	0.10
			0.10		
			1.02 best		
			1.02 tt best		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
12.29	18.01		New Order	5.00	0.00
			0.00		
12.29	3.01		Payment	5.00	0.00
			0.00		
5.15	2.01		Delivery	5.00	0.00
			0.00		
5.15	2.01		Stock Level	20.00	0.00
			0.00		
10.25	2.01		Order Status	5.00	0.00
			0.00		
			1.03 best		
			1.03 tt best		

Key	RT	RT	Menu	Txn	Think
				Weight	Time
12.41	18.01		New Order	5.00	0.10
			0.10		
12.41	3.01		Payment	5.00	0.10
			0.10		
5.20	2.01		Delivery	5.00	0.10
			0.10		
5.20	2.01		Stock Level	20.00	0.10
			0.10		
10.35	2.01		Order Status	5.00	0.10
			0.10		
			5.5		
			5.5 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
66.28	18.01		New Order	5.00	0.10
			0.10		
66.28	3.01		Payment	5.00	0.10
			0.10		
27.77	2.01		Delivery	5.00	0.10
			0.10		
27.77	2.01		Stock Level	20.00	0.10
			0.10		
55.27	2.01		Order Status	5.00	0.10
			0.10		
			6.0		
			6.0 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
72.30	18.01		New Order	5.00	0.10
			0.10		
72.30	3.01		Payment	5.00	0.10
			0.10		
30.30	2.01		Delivery	5.00	0.10
			0.10		
30.30	2.01		Stock Level	20.00	0.10
			0.10		
60.30	2.01		Order Status	5.00	0.10
			0.10		
			6.5		
			6.5 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
79.53	18.01		New Order	5.00	0.10
			0.10		
79.53	3.01		Payment	5.00	0.10
			0.10		
33.33	2.01		Delivery	5.00	0.10
			0.10		
33.33	2.01		Stock Level	20.00	0.10
			0.10		

Key	RT	RT	Menu	Txn	Think
				Weight	Time
66.33	2.01		Order Status	5.00	0.10
			0.10		
			7.0		
			7.0 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
84.35	18.01		New Order	5.00	0.10
			0.10		
84.35	3.01		Payment	5.00	0.10
			0.10		
35.35	2.01		Delivery	5.00	0.10
			0.10		
35.35	2.01		Stock Level	20.00	0.10
			0.10		
70.35	2.01		Order Status	5.00	0.10
			0.10		
			7.5		
			7.5 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
90.38	18.01		New Order	5.00	0.10
			0.10		
90.38	3.01		Payment	5.00	0.10
			0.10		
37.88	2.01		Delivery	5.00	0.10
			0.10		
37.88	2.01		Stock Level	20.00	0.10
			0.10		
75.38	2.01		Order Status	5.00	0.10
			0.10		
			8.0		
			8.0 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
96.40	18.01		New Order	5.00	0.10
			0.10		
96.40	3.01		Payment	5.00	0.10
			0.10		
40.40	2.01		Delivery	5.00	0.10
			0.10		
40.40	2.01		Stock Level	20.00	0.10
			0.10		
80.40	2.01		Order Status	5.00	0.10
			0.10		
			8.5		
			8.5 tt		
Key	RT	RT	Menu	Txn	Think
				Weight	Time
102.43	18.01		New Order	5.00	0.10
			0.10		

192.43	3.01		Payment	43.05		
			0.10	5.00	0.10	
42.92	2.01		Delivery	4.04		
			0.10	5.00	0.10	
42.92	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
85.42	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			9.0			
			9.0 tt			

Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
108.45	18.01		New Order	44.83		
			0.10	5.00	0.10	
108.45	3.01		Payment	43.05		
			0.10	5.00	0.10	
45.45	2.01		Delivery	4.04		
			0.10	5.00	0.10	
45.45	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
90.45	2.01		Order Status	4.04		
			0.10	5.00	0.10	

Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
114.47	18.01		New Order	44.83		
			0.10	5.00	0.10	
114.47	3.01		Payment	43.05		
			0.10	5.00	0.10	
47.98	2.01		Delivery	4.04		
			0.10	5.00	0.10	
47.98	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
95.47	2.01		Order Status	4.04		
			0.10	5.00	0.10	

Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
120.50	18.01		New Order	44.83		
			0.10	5.00	0.10	
120.50	3.01		Payment	43.05		
			0.10	5.00	0.10	
50.50	2.01		Delivery	4.04		
			0.10	5.00	0.10	
50.50	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
100.50	2.01		Order Status	4.04		
			0.10	5.00	0.10	
			1.02 better			
			1.02 more aggressive			

Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.05	18.01		New Order	44.92		
			0.10	5.00	0.10	
12.05	3.01		Payment	43.01		
			0.10	5.00	0.10	
5.05	2.01		Delivery	4.02		
			0.10	5.00	0.10	
5.05	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
10.05	2.01		Order Status	4.02		
			0.10	5.00	0.10	

Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.17	18.01		New Order	44.92		
			0.10	5.00	0.10	
12.17	3.01		Payment	43.01		
			0.10	5.00	0.10	
5.10	2.01		Delivery	4.02		
			0.10	5.00	0.10	
5.10	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
10.15	2.01		Order Status	4.02		
			0.10	5.00	0.10	

Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.06	18.01		New Order	44.92		
			0.10	5.00	0.10	
12.06	3.01		Payment	43.01		
			0.10	5.00	0.10	
5.06	2.01		Delivery	4.02		
			0.10	5.00	0.10	
5.06	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
10.06	2.01		Order Status	4.02		
			0.10	5.00	0.10	

Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.05	18.01		New Order	44.92		
			0.10	5.00	0.10	
12.05	3.01		Payment	43.01		
			0.10	5.00	0.10	
5.05	2.01		Delivery	4.02		
			0.10	5.00	0.10	
5.05	2.01		Stock Level	4.03		
			0.10	20.00	0.10	

10.05	2.01		Order Status	4.02		
			0.10	5.00	0.10	
			1.003 best			
			1.003 best			

Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
12.09	18.01		New Order	44.90		
			0.10	5.00	0.10	
12.09	3.01		Payment	43.05		
			0.10	5.00	0.10	
5.07	2.01		Delivery	4.01		
			0.10	5.00	0.10	
5.07	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
10.08	2.01		Order Status	4.01		
			0.10	5.00	0.10	

## Web Client Hardware Configuration

System Information report written at: 11/07/07  
10:30:04  
System Name: CL146  
[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003, Standard Edition
Version	5.2.3790 Service Pack 1 Build 3790
Other OS Description	R2
OS Manufacturer	Microsoft Corporation
System Name	CL146
System Manufacturer	HP
System Model	ProLiant DL360 G5
System Type	X86-based PC
Processor x86 Family 6 Model 15 Stepping 6	
GenuineIntel ~1600 Mhz	
Processor x86 Family 6 Model 15 Stepping 6	
GenuineIntel ~1600 Mhz	
BIOS Version/Date	HP P58, 9/18/2006
SMBIOS Version	2.3
Windows Directory	C:\WINDOWS
System Directory	C:\WINDOWS\system32
Boot Device	\Device\HarddiskVolumel
Locale	United States
Hardware Abstraction Layer	Version = "5.2.3790.1830 (srv03_spl_rtm.050324-1447)"
User Name	Not Available
Time Zone	Central Standard Time
Total Physical Memory	2,047.30 MB
Available Physical Memory	1.66 GB
Total Virtual Memory	3.36 GB
Available Virtual Memory	3.18 GB
Page File Space	1.50 GB
Page File	C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource	Device	
I/O Port	0x00000000-0x00000CF7	PCI bus
I/O Port	0x00000000-0x00000CF7	Direct memory access controller
IRQ 5	Base System Device	
IRQ 5	PCI Device	
I/O Port	0x000002F8-0x000002FF	Motherboard resources
I/O Port	0x000002F8-0x000002FF	Communications Port (COM2)
IRQ 16	PCI standard PCI-to-PCI bridge	
IRQ 16	Smart Array P400i Controller	
IRQ 16	HP NC373i Virtual Bus Device	
IRQ 16	HP NC373i Virtual Bus Device	
IRQ 16	Standard Universal PCI to USB Host Controller	
IRQ 16	Standard Enhanced PCI to USB Host Controller	
IRQ 17	PCI standard PCI-to-PCI bridge	
IRQ 17	Standard Universal PCI to USB Host Controller	
IRQ 18	PCI standard PCI-to-PCI bridge	
IRQ 18	Standard Universal PCI to USB Host Controller	
Memory Address	0xA0000-0xBFFFF	PCI bus
Memory Address	0xA0000-0xBFFFF	Standard VGA Graphics Adapter
Memory Address	0xFA000000-0xFBFFFFFF	PCI standard PCI-to-PCI bridge
Memory Address	0xFA000000-0xFBFFFFFF	PCI standard PCI-to-PCI bridge
Memory Address	0xFA000000-0xFBFFFFFF	HP NC373i Virtual Bus Device
Memory Address	0xF8000000-0xF9FFFFFF	PCI standard PCI-to-PCI bridge
Memory Address	0xF8000000-0xF9FFFFFF	PCI standard PCI-to-PCI bridge
Memory Address	0xF8000000-0xF9FFFFFF	HP NC373i Virtual Bus Device
I/O Port	0x00004000-0x00004FFF	PCI standard PCI-to-PCI bridge
I/O Port	0x00004000-0x00004FFF	Smart Array P400i Controller
[DMA]		
Resource	Device	Status

Channel 7 Direct memory access controller	OK	
[Forced Hardware]		
Device	PNP Device ID	
[I/O]		
Resource	Device	Status
0x00000000-0x00000CF7	PCI bus	OK
0x00000000-0x00000CF7	Direct memory access controller	OK
0x00000D00-0x0000FFFF	PCI bus	OK
0x00004000-0x00004FFF	PCI standard PCI-to-PCI bridge	OK
0x00004000-0x00004FFF	Smart Array P400i Controller	OK
0x00001000-0x0000101F	Standard Universal PCI to USB Host Controller	OK
0x00001020-0x0000103F	Standard Universal PCI to USB Host Controller	OK
0x00001040-0x0000105F	Standard Universal PCI to USB Host Controller	OK
0x00001060-0x0000107F	Standard Universal PCI to USB Host Controller	OK
0x00003000-0x000030FF	Standard VGA Graphics Adapter	OK
0x00003B00-0x00003BB	Standard VGA Graphics Adapter	OK
0x00003C00-0x00003DFF	Standard VGA Graphics Adapter	OK
0x00002800-0x000028FF	Base System Device	OK
0x00003400-0x000034FF	Base System Device	OK
0x00003800-0x0000381F	Standard Universal PCI to USB Host Controller	OK
0x00000A79-0x00000A79	ISAPNP Read Data Port	OK
0x00000279-0x00000279	ISAPNP Read Data Port	OK
0x00000274-0x00000277	ISAPNP Read Data Port	OK
0x00000070-0x00000077	Motherboard resources	OK
0x00000408-0x0000040F	Motherboard resources	OK
0x000004D0-0x000004D1	Motherboard resources	OK
0x00000020-0x0000003F	Motherboard resources	OK
0x000000A0-0x000000BF	Motherboard resources	OK
0x00000090-0x0000009F	Motherboard resources	OK
0x00000050-0x00000053	Motherboard resources	OK
0x00000700-0x0000071F	Motherboard resources	OK
0x00000800-0x0000083F	Motherboard resources	OK

0x00000900-0x0000097F	Motherboard resources	OK
0x00000010-0x0000001F	Motherboard resources	OK
0x00000C80-0x00000C83	Motherboard resources	OK
0x00000CD4-0x00000CD7	Motherboard resources	OK
0x00000F50-0x00000F58	Motherboard resources	OK
0x000000F0-0x000000F0	Motherboard resources	OK
0x00000CA0-0x00000CA1	Motherboard resources	OK
0x00000CA4-0x00000CA5	Motherboard resources	OK
0x000002F8-0x000002FF	Motherboard resources	OK
0x000002F8-0x000002FF	Communications Port (COM2)	OK
0x00000CA2-0x00000CA3		OK
0x00000040-0x00000043	System timer	OK
0x00000080-0x0000008F	Direct memory access controller	OK
0x000000C0-0x000000DF	Direct memory access controller	OK
0x00000061-0x00000061	System speaker	OK
0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x0000002E-0x0000002F	Extended IO Bus	OK
0x0000004E-0x0000004F	Extended IO Bus	OK
0x00000620-0x0000065F	Extended IO Bus	OK
0x00000680-0x0000069F	Extended IO Bus	OK
0x00000600-0x0000061F	Extended IO Bus	OK
0x00000660-0x0000067F	Extended IO Bus	OK
0x00000300-0x0000030F	Extended IO Bus	OK
0x000003F8-0x000003FF	Communications Port (COM1)	OK
0x00000500-0x0000050F	Standard Dual Channel PCI IDE Controller	OK
0x000001F0-0x000001F7	Primary IDE Channel	OK
0x000003F6-0x000003F6	Primary IDE Channel	OK
0x00000170-0x00000177	Secondary IDE Channel	OK
0x00000376-0x00000376	Secondary IDE Channel	OK
[IRQs]		
Resource	Device	Status

```

IRQ 9      Microsoft ACPI-Compliant System      OK
IRQ 16     PCI standard PCI-to-PCI bridge        OK
IRQ 16     Smart Array P400i Controller              OK
IRQ 16     HP NC373i Virtual Bus Device              OK
IRQ 16     HP NC373i Virtual Bus Device              OK
IRQ 16     Standard Universal PCI to USB Host
Controller OK
IRQ 16     Standard Enhanced PCI to USB Host
Controller OK
IRQ 17     PCI standard PCI-to-PCI bridge            OK
IRQ 17     Standard Universal PCI to USB Host
Controller OK
IRQ 18     PCI standard PCI-to-PCI bridge            OK
IRQ 18     Standard Universal PCI to USB Host
Controller OK
IRQ 19     Standard Universal PCI to USB Host
Controller OK
IRQ 5      Base System Device                          OK
IRQ 5      PCI Device                                  OK
IRQ 10     Base System Device                          OK
IRQ 22     Standard Universal PCI to USB Host
Controller OK
IRQ 0      System timer                                OK
IRQ 1      Standard 101/102-Key or Microsoft Natural
PS/2 Keyboard                               OK
IRQ 12     PS/2 Compatible Mouse                      OK
IRQ 4      Communications Port (COM1)                 OK
IRQ 14     Primary IDE Channel                       OK
IRQ 3      Communications Port (COM2)                 OK

[Memory]

Resource Device      Status
0xA0000-0xBFFFF     PCI bus              OK
0xA0000-0xBFFFF     Standard VGA Graphics Adapter OK

0x80000000-0xDFFFFFF PCI bus              OK
0xF0000000-0xFEBFFFF PCI bus              OK
0xFDF00000-0xFDFFFFF PCI standard PCI-to-PCI
bridge OK
0xFDD00000-0xFDEFFFF PCI standard PCI-to-PCI
bridge OK
0xFDE00000-0xFDEFFFF Smart Array P400i
Controller OK
0xFDDF0000-0xFDDF0FFF Smart Array P400i
Controller OK
0xF8000000-0xF9FFFFF PCI standard PCI-to-PCI
bridge OK
0xF8000000-0xF9FFFFF PCI standard PCI-to-PCI
bridge OK
0xF8000000-0xF9FFFFF HP NC373i Virtual Bus
Device OK
0xFA000000-0xFBFFFFF PCI standard PCI-to-PCI
bridge OK
0xFA000000-0xFBFFFFF PCI standard PCI-to-PCI
bridge OK
0xFA000000-0xFBFFFFF HP NC373i Virtual Bus
Device OK

```

```

0xF7DF0000-0xF7DF03FF Standard Enhanced PCI
to USB Host Controller
OK
0xD8000000-0xDFFFFFFF Standard VGA Graphics
Adapter OK
0xF7FF0000-0xF7FFFFFF Standard VGA Graphics
Adapter OK
0xF7FE0000-0xF7FE01FF Base System Device OK
0xF7FD0000-0xF7FD07FF Base System Device OK
0xF7FC0000-0xF7FC1FFF Base System Device OK
0xF7F00000-0xF7F7FFFF Base System Device OK
0xF7EF0000-0xF7EF00FF PCI Device OK
0xE0000000-0xEFFFFFFF Motherboard resources
OK
0xFE000000-0xFEFFFFFF Motherboard resources
OK
0xFED00000-0xFED003FF High precision event
timer OK

[Components]

[Multimedia]

[Audio Codecs]

CODEC      Manufacturer      Description
Status File Version Size
Creation Date
c:\windows\system32\msg723.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSG723.ACM
5.2.3790.1830 120.00 KB (122,880
bytes) 7/31/2007 11:34 AM
c:\windows\system32\l3codeca.acm Fraunhofer
Institut Integrierte Schaltungen IIS Fraunhofer
IIS MPEG Layer-3 Codec OK
C:\WINDOWS\system32\L3CODECA.ACM 1,
9, 0, 0305 284.00 KB (290,816 bytes)
12/16/2005 6:15 AM
c:\windows\system32\tsoft32.acm DSP GROUP,
INC. OK
C:\WINDOWS\system32\TSSOFT32.ACM
1.01 9.50 KB (9,728 bytes)
12/16/2005 6:15 AM
c:\windows\system32\msgsm32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSGSM32.ACM
5.2.3790.0 (srv03_rtm.030324-2048)
20.50 KB (20,992 bytes) 12/16/2005
6:15 AM
c:\windows\system32\msg711.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSG711.ACM
5.2.3790.0 (srv03_rtm.030324-2048)

```

```

10.00 KB (10,240 bytes) 12/16/2005
6:15 AM
c:\windows\system32\msadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSADP32.ACM
5.2.3790.0 (srv03_rtm.030324-2048)
14.50 KB (14,848 bytes) 12/16/2005
6:15 AM
c:\windows\system32\msaud32.acm Microsoft
Corporation Windows Media Audio Codec OK
C:\WINDOWS\system32\MSAUD32.ACM
8.00.00.4487 288.00 KB (294,912
bytes) 12/16/2005 6:15 AM
c:\windows\system32\imaadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\IMAADP32.ACM
5.2.3790.0 (srv03_rtm.030324-2048)
15.50 KB (15,872 bytes) 12/16/2005
6:15 AM
c:\windows\system32\sl_anet.acm Sipro Lab
Telecom Inc. Sipro Lab Telecom Audio Codec OK
C:\WINDOWS\system32\SL_ANET.ACM
3.02 84.00 KB (86,016 bytes)
12/16/2005 6:15 AM

[Video Codecs]

CODEC      Manufacturer      Description
Status File Version Size
Creation Date
c:\windows\system32\msyuv.dll Microsoft Corporation
OK
C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.0
(srv03_rtm.030324-2048) 16.50 KB (16,896 bytes)
3/24/2003 7:49 PM
c:\windows\system32\mrle32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSRLE32.DLL
5.2.3790.0 (srv03_rtm.030324-2048)
10.50 KB (10,752 bytes) 12/16/2005
6:15 AM
c:\windows\system32\iyuv_32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\IYUV_32.DLL
5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
46.50 KB (47,616 bytes) 3/24/2005
12:05 PM
c:\windows\system32\msh261.driv Microsoft
Corporation OK
C:\WINDOWS\system32\MSH261.DRV
5.2.3790.1830 184.00 KB (188,416
bytes) 7/31/2007 11:34 AM
c:\windows\system32\msh263.driv Microsoft
Corporation OK
C:\WINDOWS\system32\MSH263.DRV
5.2.3790.1830 288.00 KB (294,912
bytes) 3/24/2005 12:07 PM
c:\windows\system32\msvidc32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSVIDC32.DLL
5.2.3790.0 (srv03_rtm.030324-2048)
26.50 KB (27,136 bytes) 12/16/2005
6:15 AM

```

```

c:\windows\system32\tsbyuv.dll      Microsoft
Corporation                        OK
C:\WINDOWS\system32\TSBYUV.DLL
5.2.3790.0 (srv03_rtm.030324-2048)
8.00 KB (8,192 bytes)              3/24/2003
7:50 PM

[CD-ROM]

Item      Value
Drive     D:
Description      CD-ROM Drive
Media Loaded     No
Media Type       CD-ROM
Name             TEAC CD-224E
Manufacturer     (Standard CD-ROM drives)
Status           OK
Transfer Rate    Not Available
SCSI Target ID   0
PNP Device ID    IDE\CDROMTEAC_CD-
224E             9.9A\5&5FD9AC6&0&
0.0.0
Driver       c:\windows\system32\drivers\cdrom.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 51.00 KB
(52,224 bytes), 12/16/2005 6:15 AM)

[Sound Device]

Item      Value
Name      Standard VGA Graphics Adapter
PNP Device ID
PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
2\4&2014205D&0&18F0
Adapter Type      ATI ES1000, (Standard display
types) compatible
Adapter Description Standard VGA Graphics Adapter
Adapter RAM       32.00 MB (33,554,432 bytes)
Installed Drivers
vga.dll,framebuf.dll,vga256.dll,vga64k.dll

Driver Version    5.2.3790.1830
INF File          display.inf (vga section)
Color Planes      1
Color Table Entries 4294967296
Resolution        1024 x 768 x 1 hertz
Bits/Pixel        32
Memory Address    0xD8000000-0xDFFFFFFF
I/O Port          0x00003000-0x000030FF
Memory Address    0xF7FF0000-0xF7FFFFFF
I/O Port          0x000003B0-0x000003BB
I/O Port          0x000003C0-0x000003DF
Memory Address    0xA0000-0xBFFFFF
Driver            c:\windows\system32\drivers\vgapnp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 23.50 KB
(24,064 bytes), 6/26/2007 12:35 PM)

[Infrared]

Item      Value

```

```

[Input]

[Keyboard]

Item      Value
Description      USB Human Interface Device
Name             Enhanced (101- or 102-key)
Layout           00000409
PNP Device ID    USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00
00
Number of Function Keys 12
Driver          c:\windows\system32\drivers\hidusb.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 11.50 KB (11,776
bytes), 12/16/2005 6:15 AM)

Description      Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard
Name             Enhanced (101- or 102-key)
Layout           00000409
PNP Device ID    ACPI\PNP0303\4&2AA4AD3D&0
Number of Function Keys 12
I/O Port         0x00000060-0x00000060
I/O Port         0x00000064-0x00000064
IRQ Channel      IRQ 1
Driver           c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 54.50 KB
(55,808 bytes), 12/16/2005 6:15 AM)

[Pointing Device]

Item      Value
Hardware Type    USB Human Interface Device
Number of Buttons 3
Status           OK
PNP Device ID    USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00
01
Power Management Supported No
Double Click Threshold 6
Handedness       Right Handed Operation
Driver           c:\windows\system32\drivers\hidusb.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 11.50 KB (11,776
bytes), 12/16/2005 6:15 AM)

Hardware Type    PS/2 Compatible Mouse
Number of Buttons 3
Status           Error
PNP Device ID    ACPI\PNP0F13\4&2AA4AD3D&0
Power Management Supported No
Double Click Threshold 6
Handedness       Right Handed Operation
IRQ Channel      IRQ 12
Driver           c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 54.50 KB
(55,808 bytes), 12/16/2005 6:15 AM)

[Modem]

Item      Value

```

```

[Network]

[Adapter]

Item      Value
Name      [00000001] RAS Async Adapter
Adapter Type Not Available
Product Type RAS Async Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 11/6/2007 10:21 AM
Index 1
Service Name AsyncMac
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name      [00000002] WAN Miniport (L2TP)
Adapter Type Not Available
Product Type WAN Miniport (L2TP)
Installed Yes
PNP Device ID ROOT\MS_L2TPMINIPOINT\0000
Last Reset 11/6/2007 10:21 AM
Index 2
Service Name Rasl2tp
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver    c:\windows\system32\drivers\rasl2tp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 66.00 KB
(67,584 bytes), 12/16/2005 6:15 AM)

Name      [00000003] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPTP)
Installed Yes
PNP Device ID ROOT\MS_PPTPMINIPOINT\0000
Last Reset 11/6/2007 10:21 AM
Index 3
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30

```

Driver c:\windows\system32\drivers\rasppptp.sys  
(5.2.3790.1830 (srv03\_spl\_rtm.050324-1447), 61.00 KB  
(62,464 bytes), 12/16/2005 6:15 AM)

Name [00000004] WAN Miniport (PPPOE)  
Adapter Type Wide Area Network (WAN)  
Product Type WAN Miniport (PPPOE)  
Installed Yes  
PNP Device ID ROOT\MS\_PPPOEMINIORT\0000  
Last Reset 11/6/2007 10:21 AM  
Index 4

Service Name Raspppoe  
IP Address Not Available  
IP Subnet Not Available  
Default IP Gateway Not Available  
DHCP Enabled No  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 33:50:6F:45:30:30

Driver c:\windows\system32\drivers\raspppoe.sys  
(5.2.3790.1830 (srv03\_spl\_rtm.050324-1447), 40.00 KB  
(40,960 bytes), 12/16/2005 6:15 AM)

Name [00000005] Direct Parallel  
Adapter Type Not Available  
Product Type Direct Parallel  
Installed Yes  
PNP Device ID ROOT\MS\_PTIMINIORT\0000  
Last Reset 11/6/2007 10:21 AM  
Index 5

Service Name Raspti  
IP Address Not Available  
IP Subnet Not Available  
Default IP Gateway Not Available  
DHCP Enabled No  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address Not Available

Driver c:\windows\system32\drivers\raspti.sys  
(5.2.3790.1830 (srv03\_spl\_rtm.050324-1447), 19.50 KB  
(19,968 bytes), 12/16/2005 6:15 AM)

Name [00000006] WAN Miniport (IP)  
Adapter Type Not Available  
Product Type WAN Miniport (IP)  
Installed Yes  
PNP Device ID ROOT\MS\_NDISWANIP\0000  
Last Reset 11/6/2007 10:21 AM  
Index 6

Service Name NdisWan  
IP Address Not Available  
IP Subnet Not Available  
Default IP Gateway Not Available  
DHCP Enabled No  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address Not Available

Driver c:\windows\system32\drivers\ndiswan.sys  
(5.2.3790.1830 (srv03\_spl\_rtm.050324-1447), 91.00 KB  
(93,184 bytes), 12/16/2005 6:15 AM)

Name [00000007] HP NC373i Multifunction Gigabit  
Server Adapter  
Adapter Type Ethernet 802.3  
Product Type HP NC373i Multifunction Gigabit  
Server Adapter  
Installed Yes  
PNP Device ID

B06BDRV\L2ND&PCI\_164C14E4&SUBSYS\_7038103C&R  
EV\_12\6&30C55FC0&0&20050300  
Last Reset 11/6/2007 10:21 AM  
Index 7  
Service Name l2nd  
IP Address 130.168.40.146, 130.171.40.146

IP Subnet 255.255.0.0, 255.255.0.0  
Default IP Gateway Not Available  
DHCP Enabled No  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:19:BB:26:8E:F2

Driver c:\windows\system32\drivers\bxnd52x.sys  
(2.8.13.0 built by: WinDDK, 48.50 KB (49,664 bytes),  
7/31/2007 3:36 PM)

Name [00000008] HP NC373i Multifunction Gigabit  
Server Adapter  
Adapter Type Ethernet 802.3  
Product Type HP NC373i Multifunction Gigabit  
Server Adapter  
Installed Yes  
PNP Device ID

B06BDRV\L2ND&PCI\_164C14E4&SUBSYS\_7038103C&R  
EV\_12\6&29511DBC&0&20050500  
Last Reset 11/6/2007 10:21 AM  
Index 8  
Service Name l2nd  
IP Address 130.172.11.146  
IP Subnet 255.255.0.0

Default IP Gateway Not Available  
DHCP Enabled No  
DHCP Server Not Available  
DHCP Lease Expires Not Available  
DHCP Lease Obtained Not Available  
MAC Address 00:19:BB:26:8E:CA  
Driver c:\windows\system32\drivers\bxnd52x.sys  
(2.8.13.0 built by: WinDDK, 48.50 KB (49,664 bytes),  
7/31/2007 3:36 PM)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No

Supports Connect Data No  
Supports Disconnect Data No  
Supports Encryption No  
Supports Expedited Data Yes  
Supports Graceful Closing Yes  
Supports Guaranteed Bandwidth No  
Supports Multicasting No

Name MSAFD Tcpip [UDP/IP]  
Connectionless Service Yes  
Guarantees Delivery No  
Guarantees Sequencing No  
Maximum Address Size 16 bytes  
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes  
Minimum Address Size 16 bytes  
Pseudo Stream Oriented No  
Supports Broadcasting Yes  
Supports Connect Data No  
Supports Disconnect Data No  
Supports Encryption No  
Supports Expedited Data No  
Supports Graceful Closing No  
Supports Guaranteed Bandwidth No  
Supports Multicasting Yes

Name RSVP UDP Service Provider  
Connectionless Service Yes  
Guarantees Delivery No  
Guarantees Sequencing No  
Maximum Address Size 16 bytes  
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes  
Minimum Address Size 16 bytes  
Pseudo Stream Oriented No  
Supports Broadcasting Yes  
Supports Connect Data No  
Supports Disconnect Data No  
Supports Encryption Yes  
Supports Expedited Data No  
Supports Graceful Closing No  
Supports Guaranteed Bandwidth No  
Supports Multicasting Yes

Name RSVP TCP Service Provider  
Connectionless Service No  
Guarantees Delivery Yes  
Guarantees Sequencing Yes  
Maximum Address Size 16 bytes  
Maximum Message Size 0 bytes  
Message Oriented No  
Minimum Address Size 16 bytes  
Pseudo Stream Oriented No  
Supports Broadcasting No  
Supports Connect Data No  
Supports Disconnect Data No  
Supports Encryption Yes  
Supports Expedited Data Yes  
Supports Graceful Closing Yes  
Supports Guaranteed Bandwidth No  
Supports Multicasting No



Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{12B9D0FF-BBA9-40EF-B5AF-AAA0BC74FBAC}] SEQPACKET 3  
 Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{12B9D0FF-BBA9-40EF-B5AF-AAA0BC74FBAC}] DATAGRAM 3  
 Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{E6E120C5-688B-415E-8941-B16E4D702868}] SEQPACKET 0  
 Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{E6E120C5-688B-415E-8941-B16E4D702868}] DATAGRAM 0  
 Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{49682552-C57C-4562-A252-9BBC9ABAF8A}] SEQPACKET 1  
 Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{49682552-C57C-4562-A252-9BBC9ABAF8A}] DATAGRAM 1  
 Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{27E1D772-4D9A-4EDF-931C-1B5E0277AE81}] SEQPACKET 2  
 Connectionless Service No  
 Guarantees Delivery Yes  
 Guarantees Sequencing Yes  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting No  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

Name MSAFD NetBIOS  
 [\Device\NetBT\_Tcpip\_{27E1D772-4D9A-4EDF-931C-1B5E0277AE81}] DATAGRAM 2  
 Connectionless Service Yes  
 Guarantees Delivery No  
 Guarantees Sequencing No  
 Maximum Address Size 20 bytes  
 Maximum Message Size 62.50 KB (64,000 bytes)

Message Oriented Yes  
 Minimum Address Size 20 bytes  
 Pseudo Stream Oriented No  
 Supports Broadcasting Yes  
 Supports Connect Data No  
 Supports Disconnect Data No  
 Supports Encryption No  
 Supports Expedited Data No  
 Supports Graceful Closing No  
 Supports Guaranteed Bandwidth No  
 Supports Multicasting No

[WinSock]

Item	Value
File	c:\windows\system32\winsock.dll
Size	2.80 KB (2,864 bytes)
Version	3.10
File	c:\windows\system32\wsock32.dll
Size	22.00 KB (22,528 bytes)
Version	5.2.3790.0 (srv03_rtm.030324-2048)

[Ports]

[Serial]

Item	Value
Name	Communications Port (COM2)
Status	OK

```

PNP Device ID      ROOT\*PNP0501\1_0_17_1_0_0
Maximum Input Buffer Size      0
Maximum Output Buffer Size     No
Settable Baud Rate Yes
Settable Data Bits Yes
Settable Flow Control Yes
Settable Parity Yes
Settable Parity Check Yes
Settable Stop Bits Yes
Settable RLSLD Yes
Supports RLSLD Yes
Supports 16 Bit Mode No
Supports Special Characters No
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity None
Busy No
Abort Read/Write on Error No
Binary Mode Enabled Yes
Continue XMit on XOff No
CTS Outflow Control No
Discard NULL Bytes No
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled No
Event Character 0
Parity Check Enabled No
RTS Flow Control Type Enable
Xoff Character 19
XoffXMit Threshold 512
XOn Character 17
XOnXMit Threshold 2048
XOnXOff InFlow Control 0
XOnXOff OutFlow Control 0
I/O Port 0x000002F8-0x000002FF
IRQ Channel IRQ 3
Driver c:\windows\system32\drivers\serial.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 64.00 KB
(65,536 bytes), 12/16/2005 6:15 AM)

Name Communications Port (COM1)
Status OK
PNP Device ID ACPI\PNP0501\0
Maximum Input Buffer Size 0
Maximum Output Buffer Size No
Settable Baud Rate Yes
Settable Data Bits Yes
Settable Flow Control Yes
Settable Parity Yes
Settable Parity Check Yes
Settable Stop Bits Yes
Settable RLSLD Yes
Supports RLSLD Yes
Supports 16 Bit Mode No
Supports Special Characters No
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity None

```

```

Busy No
Abort Read/Write on Error No
Binary Mode Enabled Yes
Continue XMit on XOff No
CTS Outflow Control No
Discard NULL Bytes No
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled No
Event Character 0
Parity Check Enabled No
RTS Flow Control Type Enable
Xoff Character 19
XoffXMit Threshold 512
XOn Character 17
XOnXMit Threshold 2048
XOnXOff InFlow Control 0
XOnXOff OutFlow Control 0
IRQ Channel IRQ 4
I/O Port 0x000003F8-0x000003FF
Driver c:\windows\system32\drivers\serial.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 64.00 KB
(65,536 bytes), 12/16/2005 6:15 AM)

[Parallel]

Item Value

[Storage]

[Drives]

Item Value
Drive C:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 33.88 GB (36,381,306,880 bytes)
Free Space 26.68 GB (28,644,409,344 bytes)

Volume Name
Volume Serial Number DCED8BD7

Drive D:
Description CD-ROM Disc

Drive F:
Description Network Connection
Provider Name \\n61\c$

[Disks]

Item Value
Description Disk drive
Manufacturer (Standard disk drives)
Model HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes

```

```

Media Type Fixed hard disk
Partitions 1
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 2
SCSI Target ID 4
Sectors/Track 32
Size 33.89 GB (36,385,505,280 bytes)
Total Cylinders 8,709
Total Sectors 71,065,440
Total Tracks 2,220,795
Tracks/Cylinder 255
Partition Disk #0, Partition #0
Partition Size 33.88 GB (36,381,310,976 bytes)

Partition Starting Offset 16,384 bytes

[SCSI]

Item Value
Name Smart Array P400i Controller
Manufacturer Hewlett-Packard Company
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3235103C&REV_0
1\4&EFC3E79&0018
Memory Address 0xFDE00000-0xFDEFFFFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0xFDDF0000-0xFDDF0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpciss2.sys
(5.8.0.32 Build 10 (x86) built by: WINBUILD1, 37.50
KB (38,400 bytes), 12/31/1979 6:00 PM)

[IDE]

Item Value
Name Standard Dual Channel PCI IDE Controller

Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID
PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&F9
I/O Port 0x00000500-0x0000050F
Driver c:\windows\system32\drivers\pciide.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 5.50 KB (5,632
bytes), 12/16/2005 6:15 AM)

Name Primary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID
PCI\IDE\IDECHANNEL\4&56E2F28&0&0

I/O Port 0x000001F0-0x000001F7
I/O Port 0x000003F6-0x000003F6
IRQ Channel IRQ 14
Driver c:\windows\system32\drivers\atapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 93.50 KB
(95,744 bytes), 12/16/2005 6:15 AM)

```

```

Name      Secondary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI controllers)
Status    OK
PNP Device ID      PCI\IDE\IDECHANNEL\4&56E2F28&0&1

I/O Port 0x00000170-0x00000177
I/O Port 0x00000376-0x00000376
Driver   c:\windows\system32\drivers\atapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 93.50 KB
(95,744 bytes), 12/16/2005 6:15 AM)

[Printing]

Name      Driver      Port Name Server Name

[Problem Devices]

Device   PNP Device ID      Error Code
Base System Device
PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0
3\4&2014205D&0&20F0 The drivers for this device are
not installed.
Base System Device
PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0
3\4&2014205D&0&22F0 The drivers for this device are
not installed.
PCI Device
PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0
0\4&2014205D&0&26F0 The drivers for this device are
not installed.
Not Available      ACPI\IPI0001\0      The drivers
for this device are not installed.
Standard 101/102-Key or Microsoft Natural PS/2
Keyboard  ACPI\PNP0303\4&2AA4AD3D&0      This device
is not present, is not working properly, or does not
have all its drivers installed.
PS/2 Compatible Mouse
ACPI\PNP0F13\4&2AA4AD3D&0      This device
is not present, is not working properly, or does not
have all its drivers installed.

[USB]

Device   PNP Device ID
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E8
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_2689&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E9
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_268A&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EA
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_268B&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EB
Standard Enhanced PCI to USB Host Controller
PCI\VEN_8086&DEV_268C&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EF
Standard Universal PCI to USB Host Controller
PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0
0\4&2014205D&0&24F0

```

[Software Environment]

[System Drivers]

Name	Description	File	Type	State	Accept Pause
	Started	Start Mode		State	
	Status	Error Control		Accept Pause	
	Accept Stop				
abiosdsk	Abiosdsk	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
acpi	Microsoft ACPI Driver				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
acpiec	ACPIEC				
	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No
adpu160m	adpu160m	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
adpu320	adpu320	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
afcnt	afcnt	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
afd	AFD				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
aic78u2	aic78u2	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
aic78xx	aic78xx	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
aliide	AliIde	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
amdide	AmdIde	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
arc	arc	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
asyncmac	RAS Asynchronous Media Driver				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
atapi	Standard IDE/ESDI Hard Disk Controller				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes

atdisk	Atdisk	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
atmarpc	ATM ARP Client Protocol				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
audstub	Audio Stub Driver				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
b06bdrv	HP Virtual Bus Device				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
beep	Beep				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
cbidf2k	cbidf2k				
	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No
cd20xrnt	cd20xrnt	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
cdfs	Cdfs				
	File System Driver	Yes	Disabled		
	Running	OK	Normal	No	Yes
cdrom	CD-ROM Driver				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
changer	Changer	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
clusdisk	Cluster Disk Driver				
	Kernel Driver	No	Disabled		
	Stopped	OK	Normal	No	No
cmdide	CmdIde	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
cpqarray	Cpqarray	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
cpqarray2	cpqarray2	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			
cpqcissm	cpqcissm	Not Available	Kernel Driver	Stopped	OK
	Ignore	No			

cpqfcalm	cpqfcalm	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
crtdisk	CRC Disk Filter Driver		
	c:\windows\system32\drivers\crtdisk.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal
			No
			Yes
dac960nt	dac960nt	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
dellcerc	dellcerc	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
dfsdriver	DfsDriver		
	c:\windows\system32\drivers\dfs.sys		
	File System Driver	Yes	Boot
	Running	OK	Normal
			No
			Yes
disk	Disk Driver		
	c:\windows\system32\drivers\disk.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal
			No
			Yes
dmboot	dmboot		
	c:\windows\system32\drivers\dmboot.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal
			No
			No
dmio	Logical Disk Manager Driver		
	c:\windows\system32\drivers\dmio.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal
			No
			Yes
dmload	dmload		
	c:\windows\system32\drivers\dmload.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal
			No
			Yes
dpti2o	dpti2o	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
elxstor	elxstor	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
fastfat	Fastfat		
	c:\windows\system32\drivers\fastfat.sys		
	File System Driver	No	Disabled
	Stopped	OK	Normal
			No
			No
fdc	Fdc		
	c:\windows\system32\drivers\fdc.sys		
	Kernel Driver	No	System
	Stopped	OK	Ignore
			No
			No
fips	Fips		
	c:\windows\system32\drivers\fips.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal
			No
			Yes
flpydisk	Flpydisk		
	c:\windows\system32\drivers\flpydisk.sys		
	Kernel Driver	No	System

fltMgr	FltMgr		
	c:\windows\system32\drivers\fltMgr.sys		
	File System Driver	Yes	Boot
	Running	OK	Normal
			No
			Yes
ftdisk	Volume Manager Driver		
	c:\windows\system32\drivers\ftdisk.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal
			No
			Yes
gpc	Generic Packet Classifier		
	c:\windows\system32\drivers\msgpc.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal
			No
			Yes
hidusb	Microsoft HID Class Driver		
	c:\windows\system32\drivers\hidusb.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Ignore
			No
			Yes
hpciss	hpciss	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
hpciss2	HpCISSs2		
	c:\windows\system32\drivers\hpciss2.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal
			No
			Yes
hpn	hpn	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
hpt3xx	hpt3xx	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
http	HTTP		
	c:\windows\system32\drivers\http.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal
			No
			Yes
i2omgmt	i2omgmt	Not Available	Kernel Driver
	No	System	Stopped
	Normal	No	OK
i2omp	i2omp	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver		
	c:\windows\system32\drivers\i8042prt.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal
			No
			Yes
iirsp	iirsp	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
imapi	CD-Burning Filter Driver		
	c:\windows\system32\drivers\imapi.sys		
	Kernel Driver	No	System
	Stopped	OK	Normal
			No
			No
intelide	IntelIde	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK

intelppm	Intel Processor Driver		
	c:\windows\system32\drivers\intelppm.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal
			No
			Yes
ip6fw	IPv6 Windows Firewall Driver		
	c:\windows\system32\drivers\ip6fw.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal
			No
			No
ipfilterdriver	IP Traffic Filter Driver		
	c:\windows\system32\drivers\ipfltdrv.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal
			No
			No
ipinip	IP in IP Tunnel Driver		
	c:\windows\system32\drivers\ipinip.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal
			No
			No
ipnat	IP Network Address Translator		
	c:\windows\system32\drivers\ipnat.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal
			No
			No
ipsec	IPSEC driver		
	c:\windows\system32\drivers\ipsec.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal
			No
			Yes
ipsraidn	ipsraidn	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
irenum	IR Enumerator Service		
	c:\windows\system32\drivers\irenum.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal
			No
			No
isapnp	PnP ISA/EISA Bus Driver		
	c:\windows\system32\drivers\isapnp.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Critical
			No
			Yes
kbdclass	Keyboard Class Driver		
	c:\windows\system32\drivers\kbdclass.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal
			No
			Yes
kbdhid	Keyboard HID Driver		
	c:\windows\system32\drivers\kbdhid.sys		
	Kernel Driver	Yes	System
	Running	OK	Ignore
			No
			Yes
ksecdd	KSecDD		
	c:\windows\system32\drivers\ksecdd.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal
			No
			Yes
l2nd	HP NC370 Multifunction Gigabit Server Adapter		
	c:\windows\system32\drivers\bxnd52x.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal
			No
			Yes

lp6nds35	lp6nds35	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
nmmd	nmmd		
	c:\windows\system32\drivers\nmmd.sys		
	Kernel Driver	Yes	System
	Running	OK	Ignore
modem	Modem		
	c:\windows\system32\drivers\modem.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Ignore
mouclass	Mouse Class Driver		
	c:\windows\system32\drivers\mouclass.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal
mouhid	Mouse HID Driver		
	c:\windows\system32\drivers\mouhid.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Ignore
mountmgr	Mount Point Manager		
	c:\windows\system32\drivers\mountmgr.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal
mraid35x	mraid35x	Not Available	Kernel Driver
	No	Disabled	Stopped
	Normal	No	OK
mrxdav	WebDav Client Redirector		
	c:\windows\system32\drivers\mrxdav.sys		
	File System Driver	No	Manual
	Stopped	OK	Normal
mrxsmb	MRXSMB		
	c:\windows\system32\drivers\mrxsmb.sys		
	File System Driver	Yes	System
	Running	OK	Normal
msfs	Msfs		
	c:\windows\system32\drivers\msfs.sys		
	File System Driver	Yes	System
	Running	OK	Normal
mssmbios	Microsoft System Management BIOS Driver		
	c:\windows\system32\drivers\mssmbios.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal
mup	Mup		
	c:\windows\system32\drivers\mup.sys		
	File System Driver	Yes	Boot
	Running	OK	Normal
ndis	NDIS System Driver		
	c:\windows\system32\drivers\ndis.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal
ndistapi	Remote Access NDIS TAPI Driver		
	c:\windows\system32\drivers\ndistapi.sys		

Kernel Driver	Yes	Manual
Running	OK	Normal
	No	Yes
ndisuio	NDIS Usermode I/O Protocol	
	c:\windows\system32\drivers\ndisuio.sys	
	Kernel Driver	Yes
	Running	OK
ndiswan	Remote Access NDIS WAN Driver	
	c:\windows\system32\drivers\ndiswan.sys	
	Kernel Driver	Yes
	Running	OK
ndproxy	NDIS Proxy	
	c:\windows\system32\drivers\ndproxy.sys	
	Kernel Driver	Yes
	Running	OK
netbios	NetBIOS Interface	
	c:\windows\system32\drivers\netbios.sys	
	File System Driver	Yes
	Running	OK
netbt	NetBios over Tcpip	
	c:\windows\system32\drivers\netbt.sys	
	Kernel Driver	Yes
	Running	OK
nfrd960	nfrd960	Not Available
	No	Disabled
	Normal	No
npfs	Npfs	
	c:\windows\system32\drivers\npfs.sys	
	File System Driver	Yes
	Running	OK
ntfs	Ntfs	
	c:\windows\system32\drivers\ntfs.sys	
	File System Driver	Yes
	Running	OK
null	Null	
	c:\windows\system32\drivers\null.sys	
	Kernel Driver	Yes
	Running	OK
parport	Parport	
	c:\windows\system32\drivers\parport.sys	
	Kernel Driver	No
	Stopped	OK
partmgr	Partition Manager	
	c:\windows\system32\drivers\partmgr.sys	
	Kernel Driver	Yes
	Running	OK
pci	PCI Bus Driver	
	c:\windows\system32\drivers\pci.sys	
	Kernel Driver	Yes
	Running	OK
pciide	PCIIde	
	c:\windows\system32\drivers\pciide.sys	

Kernel Driver	Yes	Boot
Running	OK	Normal
	No	Yes
pcmcia	Pcmcia	
	c:\windows\system32\drivers\pcmcia.sys	
	Kernel Driver	No
	Stopped	OK
pdcomp	PDCOMP	Not Available
	No	Manual
	Stopped	OK
pdframe	PDFRAME	Not Available
	No	Manual
	Stopped	OK
pdreli	PDRELI	Not Available
	No	Manual
	Stopped	OK
pdrframe	PDRFRAME	Not Available
	No	Manual
	Stopped	OK
perc2	perc2	Not Available
	No	Disabled
	Stopped	OK
perc2hib	perc2hib	Not Available
	No	Disabled
	Stopped	OK
pptpminiport	WAN Miniport (PPTP)	
	c:\windows\system32\drivers\rasppptp.sys	
	Kernel Driver	Yes
	Running	OK
ptilink	Direct Parallel Link Driver	
	c:\windows\system32\drivers\ptilink.sys	
	Kernel Driver	Yes
	Running	OK
ql1080	ql1080	Not Available
	No	Disabled
	Stopped	OK
ql10wnt	ql10wnt	Not Available
	No	Disabled
	Stopped	OK
ql12160	ql12160	Not Available
	No	Disabled
	Stopped	OK
ql1240	ql1240	Not Available
	No	Disabled
	Stopped	OK
ql1280	ql1280	Not Available
	No	Disabled
	Stopped	OK
ql2100	ql2100	Not Available
	No	Disabled
	Stopped	OK
ql2200	ql2200	Not Available
	No	Disabled
	Stopped	OK
ql2300	ql2300	Not Available
	No	Disabled
	Stopped	OK
rasacd	Remote Access Auto Connection Driver	
	c:\windows\system32\drivers\rasacd.sys	
	Kernel Driver	Yes
	Running	System

	Running	OK	Normal	No	Yes
rasl2tp	WAN Miniport (L2TP) c:\windows\system32\drivers\rasl2tp.sys Kernel Driver Yes Manual Running OK Normal No Yes				
rasppoe	Remote Access PPPOE Driver c:\windows\system32\drivers\rasppoe.sys Kernel Driver Yes Manual Running OK Normal No Yes				
raspti	Direct Parallel c:\windows\system32\drivers\raspti.sys Kernel Driver Yes Manual Running OK Normal No Yes				
rdbss	Rdbss c:\windows\system32\drivers\rdbss.sys File System Driver Yes System Running OK Normal No Yes				
rdpcdd	RDPcDD c:\windows\system32\drivers\rdpcdd.sys Kernel Driver Yes System Running OK Ignore No Yes				
rdpdr	Terminal Server Device Redirector Driver c:\windows\system32\drivers\rdpdr.sys Kernel Driver Yes Manual Running OK Normal No Yes				
rdpwd	RDPWD c:\windows\system32\drivers\rdpwd.sys Kernel Driver Yes Manual Running OK Ignore No Yes				
redbook	Digital CD Audio Playback Filter Driver c:\windows\system32\drivers\redbook.sys Kernel Driver Yes System Running OK Normal No Yes				
secdrv	Secdrv c:\windows\system32\drivers\secdrv.sys Kernel Driver No Manual Stopped OK Normal No No				
serenum	Serenum Filter Driver c:\windows\system32\drivers\serenum.sys Kernel Driver Yes Manual Running OK Normal No Yes				
serial	Serial port driver c:\windows\system32\drivers\serial.sys Kernel Driver Yes System Running OK Ignore No Yes				
sfloppy	Sfloppy c:\windows\system32\drivers\sfloppy.sys Kernel Driver No System Stopped OK Ignore No No				

simbad	Simbad	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
srv	Srv		
	c:\windows\system32\drivers\srv.sys		
	File System Driver	Yes	Manual
	Running	OK	Normal No Yes
startdss	HP ProLiant Virtual Install Disk Support		
	Driver	c:\windows\system32\drivers\startdss.sys	
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
swenum	Software Bus Driver		
	c:\windows\system32\drivers\swenum.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
symc810	symc810	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
symc8xx	symc8xx	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
symmpi	symmpi	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
sym_hi	sym_hi	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
sym_u3	sym_u3	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
tcpip	TCP/IP Protocol Driver		
	c:\windows\system32\drivers\tcpip.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
tdpipe	TDPIPE		
	c:\windows\system32\drivers\tdpipe.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Ignore No No
tdtcp	TDTCP		
	c:\windows\system32\drivers\tdtcp.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Ignore No Yes
termdd	Terminal Device Driver		
	c:\windows\system32\drivers\termdd.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
toside	TosIde	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
udfs	Udfs		
	c:\windows\system32\drivers\udfs.sys		
	File System Driver	No	Disabled
	Stopped	OK	Normal No No

ultra	ultra	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
update	Microcode Update Driver		
	c:\windows\system32\drivers\update.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
usbccgp	Microsoft USB Generic Parent Driver		
	c:\windows\system32\drivers\usbccgp.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
usbhci	Microsoft USB 2.0 Enhanced Host Controller		
	Miniport Driver		
	c:\windows\system32\drivers\usbhci.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
usbhub	Microsoft USB Standard Hub Driver		
	c:\windows\system32\drivers\usbhub.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
usbstor	USB Mass Storage Driver		
	c:\windows\system32\drivers\usbstor.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
usbuhci	Microsoft USB Universal Host Controller		
	Miniport Driver		
	c:\windows\system32\drivers\usbuhci.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
vga	vga		
	c:\windows\system32\drivers\vgapnp.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Ignore No Yes
vgasave	VGA Display Controller.		
	c:\windows\system32\drivers\vga.sys		
	Kernel Driver	No	System
	Stopped	OK	Ignore No No
viaide	ViaIde	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
volsnap	Storage volumes		
	c:\windows\system32\drivers\volsnap.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
wanarp	Remote Access IP ARP Driver		
	c:\windows\system32\drivers\wanarp.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
wdica	WDICA	Not Available	Kernel Driver
	No	Manual	Stopped OK
	Ignore	No	No
wlbs	Network Load Balancing		
	c:\windows\system32\drivers\wlbs.sys		

Kernel Driver	No	Manual	
Stopped	OK	Normal	No No
[Signed Drivers]			
Device Name	Signed	Device Class	
Driver Version		Driver Date	
Manufacturer		INF Name	Driver Name
Device ID			
Communications Port	Yes	PORTS	5.2.3790.0
10/1/2002 (Standard port types)			
msports.inf		Not Available	
ROOT\*PNP0501\1_0_17_1_0_0			
Microsoft System Management BIOS Driver	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	
(Standard system devices)		machine.inf	
Not Available		ROOT\SYSTEM\0002	
Microcode Update Device	Yes	SYSTEM	
5.2.3790.1830		10/1/2002 (Standard	
system devices)		machine.inf	Not Available
ROOT\SYSTEM\0001			
Plug and Play Software Device Enumerator			Yes
SYSTEM	5.2.3790.1830	10/1/2002	
(Standard system devices)		machine.inf	
Not Available		ROOT\SYSTEM\0000	
Terminal Server Mouse Driver	Yes	SYSTEM	
5.2.3790.1830		10/1/2002 (Standard	
system devices)		machine.inf	Not Available
ROOT\RDP_MOU\0000			
Terminal Server Keyboard Driver		Yes	
SYSTEM	5.2.3790.1830	10/1/2002	
(Standard system devices)		machine.inf	
Not Available		ROOT\RDP_KBD\0000	
Terminal Server Device Redirector		Yes	
SYSTEM	5.2.3790.1830	10/1/2002	
(Standard system devices)		machine.inf	
Not Available		ROOT\RDPDR\0000	
Direct Parallel	Yes	NET	5.2.3790.1830
10/1/2002 Microsoft netrasa.inf			Not
Available		ROOT\MS_PTMINIPORT\0000	
WAN Miniport (PPTP)	Yes	NET	5.2.3790.1830
10/1/2002 Microsoft netrasa.inf			Not
Available		ROOT\MS_PPTPMINIPORT\0000	
WAN Miniport (PPPOE)	Yes	NET	
5.2.3790.1830		10/1/2002 Microsoft	
netrasa.inf		Not Available	
ROOT\MS_PPPOEMINIPORT\0000			
WAN Miniport (IP)	Yes	NET	5.2.3790.1830
10/1/2002 Microsoft netrasa.inf			Not
Available		ROOT\MS_NDISWANIP\0000	
WAN Miniport (L2TP)	Yes	NET	5.2.3790.1830
10/1/2002 Microsoft netrasa.inf			Not
Available		ROOT\MS_L2TPMINIPORT\0000	
Video Codecs	Yes	MEDIA	5.2.3790.0
10/1/2002 (Standard system devices)			
wave.inf		Not Available	
ROOT\MEDIA\MS_MMVID			
Legacy Video Capture Devices	Yes	MEDIA	
5.2.3790.0		10/1/2002 (Standard	
system devices)		wave.inf	Not Available
ROOT\MEDIA\MS_MVCD			

Media Control Devices	Yes	MEDIA	
5.2.3790.0		10/1/2002 (Standard	
system devices)		wave.inf	Not Available
ROOT\MEDIA\MS_MMMCI			
Legacy Audio Drivers	Yes	MEDIA	
5.2.3790.0		10/1/2002 (Standard	
system devices)		wave.inf	Not Available
ROOT\MEDIA\MS_MMDRV			
Audio Codecs	Yes	MEDIA	5.2.3790.0
10/1/2002 (Standard system devices)			
wave.inf		Not Available	
ROOT\MEDIA\MS_MMACM			
Remote Access IP ARP Driver		Not Available	
LEGACYDRIVER		Not Available	Not
Available		Not Available	Not
Available		ROOT\LEGACY_WANARP\0000	
volsnap		Not Available	LEGACYDRIVER
Available		Not Available	Not
Available		Not Available	Not
Available		Not Available	Not
ROOT\LEGACY_VOLSNAP\0000			
TDTCP		Not Available	LEGACYDRIVER
Available		Not Available	Not
Available		Not Available	Not
ROOT\LEGACY_TDTCP\0000			
TCP/IP Protocol Driver		Not Available	
LEGACYDRIVER		Not Available	Not
Available		Not Available	Not
Available		ROOT\LEGACY_TCPIP\0000	
HP ProLiant Virtual Install Disk Support Driver		Not Available	Not
LEGACYDRIVER		Not Available	Not
Available		Not Available	Not
Available		ROOT\LEGACY_STARTDSS\0000	
RDPWD		Not Available	LEGACYDRIVER
Available		Not Available	Not
Available		Not Available	Not
ROOT\LEGACY_RDPWD\0000			
RDPDCCD		Not Available	LEGACYDRIVER
Available		Not Available	Not
Available		Not Available	Not
ROOT\LEGACY_RDPDCCD\0000			
Remote Access Auto Connection Driver		Not Available	
LEGACYDRIVER		Not Available	Not
Available		Not Available	Not
Available		ROOT\LEGACY_RASACD\0000	
Partition Manager		Not Available	LEGACYDRIVER
Not Available		Not Available	Not
Available		Not Available	Not
ROOT\LEGACY_PARTMGR\0000			
Null		Not Available	LEGACYDRIVER
Available		Not Available	Not
Available		Not Available	Not
ROOT\LEGACY_NULL\0000			
NetBios over Tcpip		Not Available	LEGACYDRIVER
Not Available		Not Available	Not
Available		Not Available	Not
Available		Not Available	Not
ROOT\LEGACY_NETBT\0000			
NDProxy		Not Available	LEGACYDRIVER
Available		Not Available	Not
Available		Not Available	Not
ROOT\LEGACY_NDPROXY\0000			
NDIS Usermode I/O Protocol		Not Available	
LEGACYDRIVER		Not Available	Not

Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISUIO\0000		
Remote Access NDIS TAPI Driver		Not Available	
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDIS_TAPI\0000		
NDIS System Driver		Not Available	LEGACYDRIVER
Not Available		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDIS\0000		
mountmgr		Not Available	LEGACYDRIVER
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_MOUNTMGR\0000			
mmdd		Not Available	LEGACYDRIVER
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_MMDD\0000			
ksecdd		Not Available	LEGACYDRIVER
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_KSECDD\0000			
IPSEC driver		Not Available	LEGACYDRIVER
Not Available		Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_IPSEC\0000			
IP Network Address Translator		Not Available	
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_IPNAT\0000		
HTTP		Not Available	LEGACYDRIVER
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_HTTP\0000			
Generic Packet Classifier		Not Available	
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_GPC\0000		
Fips		Not Available	LEGACYDRIVER
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_FIPS\0000			
dmload		Not Available	LEGACYDRIVER
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_DMLOAD\0000			
dmboot		Not Available	LEGACYDRIVER
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_DMBOOT\0000			
CRC Disk Filter Driver		Not Available	
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_CRCDISK\0000		
Beep		Not Available	LEGACYDRIVER
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_BEEP\0000			
AFD		Not Available	LEGACYDRIVER
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
ROOT\LEGACY_AFD\0000			

Generic volume Yes VOLUME 5.2.3790.1830  
 10/1/2002 Microsoft volume.inf Not Available  
 STORAGE\VOLUME\1&30A96598&0&SIGNATURE2C602C60FFSET4000LENGTH8787EC000  
 Volume Manager Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ROOT\FTDISK\0000  
 Logical Disk Manager Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ROOT\DMIO\0000  
 ACPI Fixed Feature Button Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\FIXEDBUTTON\2&DABA3FF&0  
 ACPI Thermal Zone Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\THERMALZONE\THM0  
 Secondary IDE Channel Yes HDC 5.2.3790.1830  
 10/1/2002 (Standard IDE ATA/ATAPI controllers) mshdc.inf Not Available  
 PCI\IDE\IDECHANNEL\4&56E2F28&0&1  
 CD-ROM Drive Yes CDROM 5.2.3790.0  
 10/1/2002 (Standard CD-ROM drives) cdrom.inf Not Available  
 IDE\CDROMTEAC\_CD-9.9A\5&5FD9AC6&0&0.0.0  
 Primary IDE Channel Yes HDC 5.2.3790.1830  
 10/1/2002 (Standard IDE ATA/ATAPI controllers) mshdc.inf Not Available  
 PCI\IDE\IDECHANNEL\4&56E2F28&0&0  
 Standard Dual Channel PCI IDE Controller Yes  
 HDC 5.2.3790.1830 10/1/2002 (Standard IDE ATA/ATAPI controllers) mshdc.inf Not Available  
 PCI\VEN\_8086&DEV\_269E&SUBSYS\_31FE103C&REV\_09\3&61AAA01&0&F9  
 Communications Port Yes PORTS 5.2.3790.0  
 10/1/2002 (Standard port types) msports.inf Not Available  
 ACPI\PNP0501\0  
 Extended IO Bus Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0A06\4&2AA4AD3D&0  
 PS/2 Compatible Mouse Yes MOUSE 5.2.3790.1830  
 10/1/2002 Microsoft mouse.inf Not Available  
 ACPI\PNP0F13\4&2AA4AD3D&0  
 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard Yes KEYBOARD 5.2.3790.0  
 10/1/2002 (Standard keyboards) keyboard.inf Not Available  
 ACPI\PNP0303\4&2AA4AD3D&0  
 System speaker Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0800\4&2AA4AD3D&0

Direct memory access controller Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0200\4&2AA4AD3D&0  
 High precision event timer Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0103\0  
 System timer Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0100\4&2AA4AD3D&0  
 Not Available Not Available Not Available Not Available  
 Not Available Not Available Not Available Not Available  
 Available Not Available Not Available Not Available  
 ACPI\IPI0001\0  
 Motherboard resources Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ACPI\PNP0C02\0  
 ISAPNP Read Data Port Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 ISAPNP\READDATA\PORT\0  
 PCI standard ISA bridge Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices) machine.inf Not Available  
 PCI\VEN\_8086&DEV\_2670&SUBSYS\_00000000&REV\_09\3&61AAA01&0&F8  
 PCI Device Not Available UNKNOWN Not Available Not Available Not Available  
 PCI\VEN\_103C&DEV\_3302&SUBSYS\_3305103C&REV\_00\4&2014205D&0&26F0  
 Generic USB Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Generic USB Hub) usb.inf Not Available  
 USB\VID\_03F0&PID\_1327\6&18FFBC52&0&2  
 HID-compliant mouse Yes MOUSE 5.2.3790.1830  
 10/1/2002 Microsoft mouse.inf Not Available  
 HID\VID\_03F0&PID\_1027&MI\_01\8&25B103E6&0&00  
 USB Human Interface Device Yes HIDCLASS 5.2.3790.0  
 10/1/2002 (Standard system devices) input.inf Not Available  
 USB\VID\_03F0&PID\_1027&MI\_01\7&2CD6FDA9&0&00  
 HID Keyboard Device Yes KEYBOARD 5.2.3790.0  
 10/1/2002 (Standard keyboards) keyboard.inf Not Available  
 HID\VID\_03F0&PID\_1027&MI\_00\8&DED77A1&0&000  
 USB Human Interface Device Yes HIDCLASS 5.2.3790.0  
 10/1/2002 (Standard system devices) input.inf Not Available  
 USB\VID\_03F0&PID\_1027&MI\_00\7&2CD6FDA9&0&00  
 USB Composite Device Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller) usb.inf Not Available  
 USB\VID\_03F0&PID\_1027\6&18FFBC52&0&1

USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available  
 USB\ROOT\_HUB\5&26BC3420&0  
 Standard Universal PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available  
 PCI\VEN\_103C&DEV\_3300&SUBSYS\_3305103C&REV\_00\4&2014205D&0&24F0  
 Base System Device Not Available UNKNOWN Not Available Not Available Not Available  
 PCI\VEN\_0E11&DEV\_B204&SUBSYS\_3305103C&REV\_03\4&2014205D&0&22F0  
 Base System Device Not Available UNKNOWN Not Available Not Available Not Available  
 PCI\VEN\_0E11&DEV\_B203&SUBSYS\_3305103C&REV\_03\4&2014205D&0&20F0  
 Default Monitor Yes MONITOR 5.1.2001.0  
 6/6/2001 (Standard monitor types) monitor.inf Not Available  
 DISPLAY\DEFAULT\_MONITOR\5&E64F3B&0&12345678&01&03  
 Standard VGA Graphics Adapter Yes DISPLAY 5.2.3790.0  
 10/1/2002 (Standard display types) display.inf Not Available  
 PCI\VEN\_1002&DEV\_515E&SUBSYS\_31FB103C&REV\_02\4&2014205D&0&18F0  
 Intel(R) 82801 PCI Bridge - 244E Yes SYSTEM 5.2.3790.1830  
 10/1/2002 Intel machine.inf Not Available  
 PCI\VEN\_8086&DEV\_244E&SUBSYS\_00000000&REV\_D9\3&61AAA01&0&F0  
 USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available  
 USB\ROOT\_HUB20\4&392538C3&0  
 Standard Enhanced PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available  
 PCI\VEN\_8086&DEV\_268C&SUBSYS\_31FE103C&REV\_09\3&61AAA01&0&EF  
 USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available  
 USB\ROOT\_HUB\4&41C0314&0  
 Standard Universal PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available  
 PCI\VEN\_8086&DEV\_268B&SUBSYS\_31FE103C&REV\_09\3&61AAA01&0&EB  
 USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available  
 USB\ROOT\_HUB\4&A54F890&0  
 Standard Universal PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002 (Standard USB Host Controller) usbport.inf Not Available



```

PCI\VEN_8086&DEV_268A&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EA
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&37897620&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_2689&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E9
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&7353027&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E8
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F6&SUBSYS_00000000&REV_B
1\3&61AAA01&0&B0
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F&SUBSYS_00000000&REV_B
1\3&61AAA01&0&A8
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F3&SUBSYS_00000000&REV_B
1\3&61AAA01&0&98
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F1&SUBSYS_00000000&REV_B
1\3&61AAA01&0&88
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
1\3&61AAA01&0&82
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F&SUBSYS_00000000&REV_B
1\3&61AAA01&0&81
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
1\3&61AAA01&0&80
HP NC373i Multifunction Gigabit Server Adapter No
NET 2.8.13.0 6/30/2006 Hewlett-
Packard Company oem5.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&29511DBC&0&20050500

```

```

HP NC373i Virtual Bus Device No SYSTEM
2.8.14.0 7/8/2006 Hewlett-Packard Company
oem8.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
2\5&3687280D&0&000038
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
3\4&8C20058&0&0038
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
3\4&8C20058&0&0038
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E7&SUBSYS_00000000&REV_B
1\3&61AAA01&0&38
HP NC373i Multifunction Gigabit Server Adapter No
NET 2.8.13.0 6/30/2006 Hewlett-
Packard Company oem5.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&30C55FC0&0&20050300
HP NC373i Virtual Bus Device No SYSTEM
2.8.14.0 7/8/2006 Hewlett-Packard Company
oem8.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
2\5&20B00FFE&0&000030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
3\4&79C23&0&0030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E6&SUBSYS_00000000&REV_B
1\3&61AAA01&0&30
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E5&SUBSYS_00000000&REV_B
1\3&61AAA01&0&28
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25F8&SUBSYS_00000000&REV_B
1\3&61AAA01&0&20
Disk drive Yes DISKDRIVE 5.2.3790.0
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
18\5&439F94&0&040
HP Virtual LUN Yes SYSTEM 5.2.3790.1830
10/1/2002 Compaq scsiidev.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CIS2\5&439F94&0&000
Smart Array P400i Controller Yes SCSIADAPTER
5.8.0.32 2/13/2006 Hewlett-Packard Company

```

```

oem0.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3235103C&REV_0
1\4&EFC3E79&0&0018
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E3&SUBSYS_00000000&REV_B
1\3&61AAA01&0&18
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_350C&SUBSYS_00000000&REV_0
1\4&641DA44&0&0310
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3518&SUBSYS_00000000&REV_0
1\5&38BD847A&0&100010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3514&SUBSYS_00000000&REV_0
1\5&38BD847A&0&080010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3510&SUBSYS_00000000&REV_0
1\5&38BD847A&0&000010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3500&SUBSYS_00000000&REV_0
1\4&641DA44&0&0010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E2&SUBSYS_00000000&REV_B
1\3&61AAA01&0&10
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25D8&SUBSYS_00000000&REV_B
1\3&61AAA01&0&00
PCI bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\2&DABA3FF&0
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL-_
_X86_FAMILY_6_MODEL_15_1
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL-_
_X86_FAMILY_6_MODEL_15_0

```

```

Microsoft ACPI-Compliant System      Yes
SYSTEM 5.2.3790.0                    10/1/2002
Microsoft ACPI.inf Not Available
ACPI_HAL\PNP0C08\0
ACPI Multiprocessor PC               Yes      COMPUTER
5.2.3790.1830                        10/1/2002 (Standard
computers) hal.inf Not Available
ROOT\ACPI_HAL\0000
Not Available Not Available Not Available
Not Available Not Available Not Available
Available Not Available Not Available
HTREE\ROOT\0

```

[Environment Variables]

```

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path
%SystemRoot%\system32;%SystemRoot%;%SystemR
oot%\System32\Wbem;C:\Program Files\Microsoft SQL
Server\90\Tools\Binn\;C:\Program Files\Microsoft SQL
Server\90\Tools\Binn\;C:\Program Files\Microsoft SQL
Server\90\DTS\Binn\;C:\Program Files\Microsoft SQL
Server\90\Tools\Binn\VSShell\Common7\IDE\;C:\Program
Files\Microsoft Visual Studio
8\Common7\IDE\PrivateAssemblies\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
FP_NO_HOST_CHECK NO <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE x86 <SYSTEM>
PROCESSOR_LEVEL 6 <SYSTEM>
PROCESSOR_IDENTIFIER x86 Family 6 Model 15
Stepping 6, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0f06 <SYSTEM>
NUMBER_OF_PROCESSORS 2 <SYSTEM>
ClusterLog C:\WINDOWS\cluster\cluster.log
<SYSTEM>
PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
;.WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\
<SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
CL146\Administrator
TMP %USERPROFILE%\Local Settings\Temp
CL146\Administrator

```

[Print Jobs]

```

Document Size Owner Notify Status
Time Submitted Start Time
Until Time Elapsed Time
Pages Printed Job ID Priority
Parameters Driver Print
Processor Host Print Queue Data Type Name

```

[Network Connections]

```

Local Name Remote Name Type
Status User Name
F: \\n61\c$ Disk Current Connection
CL146\Administrator

```

[Running Tasks]

```

Name Path Process ID Priority Min
Working Set Max Working Set Start Time
Version Size File Date
system idle process Not Available 0 0
Not Available Not Available Not
Available Not Available Not Available
system Not Available 4 8 0
1413120 Not Available Not Available
smss.exe Not Available 364 11
204800 1413120 11/6/2007 10:21 AM Not
Available Not Available Not Available
csrss.exe Not Available 560 13 Not
Available Not Available 11/6/2007 10:21 AM Not
Available Not Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe
632 13 204800 1413120
11/6/2007 10:21 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 497.00 KB (508,928
bytes) 12/16/2005 6:15 AM
services.exe c:\windows\system32\services.exe
676 9 204800 1413120
11/6/2007 10:21 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 107.50 KB (110,080
bytes) 12/16/2005 6:15 AM
lsass.exe c:\windows\system32\lsass.exe 688 9
204800 1413120 11/6/2007 10:21 AM
5.2.3790.0 (srv03_rtm.030324-2048)
13.00 KB (13,312 bytes) 12/16/2005
svchost.exe c:\windows\system32\svchost.exe
928 8 204800 1413120
11/6/2007 10:21 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/16/2005 6:15 AM
svchost.exe Not Available 976 8
Not Available Not Available
11/6/2007 10:21 AM Not Available Not
Available Not Available
svchost.exe Not Available 1068 8
Not Available Not Available
11/6/2007 10:21 AM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\winlogon.exe
3844 13 204800 1413120
11/7/2007 10:28 AM 5.2.3790.1830

```

```

11/6/2007 10:21 AM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
1172 8 204800 1413120
11/6/2007 10:21 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/16/2005 6:15 AM
spoolsv.exe c:\windows\system32\spoolsv.exe
1668 8 204800 1413120
11/6/2007 10:21 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 57.00 KB (58,368 bytes)
12/16/2005 6:15 AM
msdtc.exe Not Available 1700 8 Not
Available Not Available 11/6/2007 10:21 AM Not
Available Not Available Not Available
svchost.exe c:\windows\system32\svchost.exe
1852 8 204800 1413120
11/6/2007 10:21 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/16/2005 6:15 AM
inetinfo.exe c:\windows\system32\inetrv\inetinfo.exe
1924 8 204800 1413120
11/6/2007 10:21 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
7/31/2007 4:55 PM
svchost.exe Not Available 1980 8
Not Available Not Available
11/6/2007 10:21 AM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
1108 8 204800 1413120
11/6/2007 10:21 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/16/2005 6:15 AM
svchost.exe c:\windows\system32\svchost.exe
1352 8 204800 1413120
11/6/2007 10:21 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes)
12/16/2005 6:15 AM
wmiprvse.exe Not Available 1052 8
Not Available Not Available
11/6/2007 10:23 AM Not Available Not
Available Not Available
w3wp.exe c:\windows\system32\inetrv\w3wp.exe 504
8 204800 1413120 11/6/2007
10:26 AM 6.0.3790.1830 (srv03_spl_rtm.050324-1447)
7.00 KB (7,168 bytes) 7/31/2007
4:55 PM
dllhost.exe c:\windows\system32\dllhost.exe
1568 8 204800 1413120
11/6/2007 10:26 AM 5.2.3790.0
(srv03_rtm.030324-2048) 5.50 KB (5,632 bytes)
12/16/2005 6:15 AM
logon.scr Not Available 3532 4 Not
Available Not Available 11/6/2007 10:31 AM Not
Available Not Available Not Available
csrss.exe Not Available 3900 13 Not
Available Not Available 11/7/2007 10:28 AM Not
Available Not Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe
3844 13 204800 1413120
11/7/2007 10:28 AM 5.2.3790.1830

```

```

(srv03_spl_rtm.050324-1447) 497.00 KB (508,928
bytes) 12/16/2005 6:15 AM
rdpclip.exe c:\windows\system32\rdpclip.exe
4008 8 204800 1413120
11/7/2007 10:28 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 68.00 KB (69,632 bytes)
7/31/2007 11:31 AM
explorer.exe c:\windows\explorer.exe
2396 8 204800 1413120
11/7/2007 10:28 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 1.00 MB (1,050,624
bytes) 12/16/2005 6:15 AM
wuauc1t.exe c:\windows\system32\wuauc1t.exe
3892 8 204800 1413120
11/7/2007 10:28 AM 5.7.3790.1830
(srv03_spl_rtm.050324-1447) 109.50 KB (112,128
bytes) 7/31/2007 11:34 AM
helpctr.exe c:\windows\pchealth\helpctr\binaries\helpct
r.exe 3028 8 204800 1413120
11/7/2007 10:28 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 778.00 KB (796,672
bytes) 7/31/2007 11:34 AM
helpsvc.exe c:\windows\pchealth\helpctr\binaries\helpsv
c.exe 3488 8 204800 1413120
11/7/2007 10:28 AM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 745.00 KB (762,880
bytes) 7/31/2007 11:34 AM
wmiprvse.exe Not Available 3324 8
Not Available Not Available
11/7/2007 10:28 AM Not Available Not
Available Not Available

[Loaded Modules]

Name Version Size File Date Manufacturer
Path
winlogon 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
497.00 KB (508,928 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\winlogon.exe
ntdll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
748.50 KB (766,464 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\ntdll.dll
kernel32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1,014.00 KB (1,038,336 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\kernel32.dll
advapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
605.50 KB (620,032 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\advapi32.dll
rpcrt4 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
627.00 KB (642,048 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\rpcrt4.dll
crypt32 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
582.00 KB (595,968 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\crypt32.dll

```

```

msasn1 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
56.50 KB (57,856 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\msasn1.dll
msvcrt 7.0.3790.1830 (srv03_spl_rtm.050324-1447)
340.50 KB (348,672 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\msvcrt.dll
user32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
574.50 KB (588,288 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\user32.dll
gdi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
273.00 KB (279,552 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\gdi32.dll
nddeapi 5.2.3790.0 (srv03_rtm.030324-2048)
16.00 KB (16,384 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\nddeapi.dll
profmap 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
22.50 KB (23,040 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\profmap.dll
netapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
341.50 KB (349,696 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\netapi32.dll
userenv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
771.00 KB (789,504 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\userenv.dll
psapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
20.00 KB (20,480 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\psapi.dll
regapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
55.00 KB (56,320 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\regapi.dll
secur32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
64.00 KB (65,536 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\secur32.dll
setupapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.03 MB (1,079,808 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\setupapi.dll
version 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
18.00 KB (18,432 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\version.dll
winsta 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
54.50 KB (55,808 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\winsta.dll
ws2_32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
82.00 KB (83,968 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\ws2_32.dll
ws2help 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
19.50 KB (19,968 bytes) 12/16/2005

```

```

6:15 AM Microsoft Corporation
c:\windows\system32\ws2help.dll
msgina 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.16 MB (1,211,904 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\msgina.dll
shsvcs 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
131.50 KB (134,656 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\shsvcs.dll
shlwapi 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
313.50 KB (321,024 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\shlwapi.dll
sfc 5.2.3790.0 (srv03_rtm.030324-2048)
4.50 KB (4,608 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\sfc.dll
sfc_os 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
138.00 KB (141,312 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\sfc_os.dll
wintrust 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
162.00 KB (165,888 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\wintrust.dll
imagehlp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
145.50 KB (148,992 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\imagehlp.dll
ole32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.19 MB (1,245,184 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\ole32.dll
comctl32 6.0 (srv03_spl_rtm.050324-1447)
1.00 MB (1,051,136 bytes) 6/26/2007
11:53 AM Microsoft Corporation
c:\windows\winsxs\x86_microsoft.windows.com
mon-controls_6595b64144ccfd1f_6.0.3790.1830_x-
ww_7ae38ccf\comctl32.dll
sxs 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
743.50 KB (761,344 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\sxs.dll
wincard 5.2.3790.0 (srv03_rtm.030324-2048)
98.50 KB (100,864 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\wincard.dll
wtsapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
19.00 KB (19,456 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\wtsapi32.dll
shell32 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
7.99 MB (8,379,392 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\shell32.dll
wildap32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
174.50 KB (178,688 bytes) 12/16/2005
6:15 AM Microsoft Corporation
c:\windows\system32\wildap32.dll
rsaenh 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
183.98 KB (188,392 bytes) 12/16/2005

```

6:15 AM Microsoft Corporation  
 c:\windows\system32\rsaenh.dll  
 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 100.00 KB (102,400 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\csddl.dll  
 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 19.00 KB (19,456 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\dimntfy.dll  
 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 19.00 KB (19,456 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\dimntfy.dll  
 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 94.50 KB (96,768 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\wlnotify.dll  
 5.2.3790.0 (srv03\_rtm.030324-2048)  
 56.00 KB (57,344 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\mpr.dll  
 5.2.3790.1830 543.00 KB (556,032 bytes)  
 12/16/2005 6:15 AM Microsoft Corporation  
 c:\windows\system32\oleaut32.dll  
 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 172.50 KB (176,640 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\winmm.dll  
 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 147.00 KB (150,528 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\winspool.drv  
 5.82 (srv03\_spl\_rtm.050324-1447)  
 585.00 KB (599,040 bytes) 6/26/2007

11:53 AM Microsoft Corporation  
 c:\windows\winsxs\x86\_microsoft.windows.com  
 mon-controls\_6595b64144ccfd5f\_5.82.3790.1830\_x-  
 ww\_lb6f474a\comctl32.dll

6:15 AM Microsoft Corporation  
 c:\windows\system32\uxtheme  
 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 202.00 KB (206,848 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\uxtheme.dll  
 2001.12.4720.1830 (srv03\_spl\_rtm.050324-  
 1447) 502.50 KB (514,560 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
 c:\windows\system32\clbcatq.dll  
 2001.12.4720.0 (srv03\_rtm.030324-2048)  
 778.00 KB (796,672 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\comres.dll  
 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 20.50 KB (20,992 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
 c:\windows\system32\wbem\wbemprox.dll  
 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 221.00 KB (226,304 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\wbem\wbemcomn.dll  
 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 2.76 MB (2,897,920 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\xpsp2res.dll  
 5.2.3790.0 (srv03\_rtm.030324-2048)  
 42.50 KB (43,520 bytes) 7/31/2007

11:32 AM Microsoft Corporation  
 c:\windows\system32\wbem\wbemsvc.dll

fastprox 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 471.00 KB (482,304 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
 c:\windows\system32\wbem\fastprox.dll  
 msvcp60 6.05.2144.0 388.00 KB (397,312 bytes)  
 12/16/2005 6:15 AM Microsoft Corporation  
 c:\windows\system32\msvcp60.dll  
 ntdsapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 71.00 KB (72,704 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\ntdsapi.dll  
 dnsapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 153.50 KB (157,184 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\dnsapi.dll  
 services 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 107.50 KB (110,080 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\services.exe  
 ncobjapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 36.00 KB (36,864 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\ncobjapi.dll  
 scesrv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 327.00 KB (334,848 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\scesrv.dll  
 authz 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 66.50 KB (68,096 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\authz.dll  
 umpnpgmr 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 126.50 KB (129,536 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\umpnpgmr.dll  
 eventlog 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 67.50 KB (69,120 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\eventlog.dll  
 lsass 5.2.3790.0 (srv03\_rtm.030324-2048)  
 13.00 KB (13,312 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\lsass.exe  
 lsasrv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 803.00 KB (822,272 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\lsasrv.dll  
 samlib 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 46.50 KB (47,616 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\samlib.dll  
 samsrv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 450.50 KB (461,312 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\samsrv.dll  
 cryptdll 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 32.00 KB (32,768 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\cryptdll.dll  
 msprivs 5.2.3790.0 (srv03\_rtm.030324-2048)  
 46.50 KB (47,616 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\msprivs.dll

kerberos 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 340.50 KB (348,672 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\kerberos.dll  
 msvl\_0 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 141.00 KB (144,384 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\msvl\_0.dll  
 iphlpapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 92.50 KB (94,720 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\iphlpapi.dll  
 netlogon 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 409.50 KB (419,328 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\netlogon.dll  
 w32time 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 222.00 KB (227,328 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\w32time.dll  
 schannel 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 141.00 KB (144,384 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\schannel.dll  
 wdigest 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 74.00 KB (75,776 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\wdigest.dll  
 rassfm 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 23.00 KB (23,552 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\rassfm.dll  
 kdcsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 213.50 KB (218,624 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\kdcsvc.dll  
 ntdsa 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 1.45 MB (1,516,032 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\ntdsa.dll  
 esent 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 1,022.50 KB (1,047,040 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\esent.dll  
 ntdsatq 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 29.50 KB (30,208 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\ntdsatq.dll  
 mswsock 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 250.50 KB (256,512 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\mswsock.dll  
 scecli 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 186.50 KB (190,976 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\scecli.dll  
 ws03res 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 793.50 KB (812,544 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\ws03res.dll  
 hnetcfg 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 343.50 KB (351,744 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\hnetcfg.dll  
 wshtcpip 5.2.3790.0 (srv03\_rtm.030324-2048)  
 18.00 KB (18,432 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\wshtcpip.dll  
 ipsecsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 180.50 KB (184,832 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\ipsecsvc.dll  
 oakley 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 264.00 KB (270,336 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\oakley.dll  
 winipsec 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 35.50 KB (36,352 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\winipsec.dll  
 pstorsvc 5.2.3790.0 (srv03\_rtm.030324-2048)  
 24.00 KB (24,576 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\pstorsvc.dll  
 psbase 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 84.00 KB (86,016 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\psbase.dll  
 dssenh 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 139.98 KB (143,336 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\dssenh.dll  
 wlbctrl 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 82.00 KB (83,968 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\wlbctrl.dll  
 w3ssl 6.0.3790.0 (srv03\_rtm.030324-2048)  
 15.00 KB (15,360 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\w3ssl.dll  
 strmfilt 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 84.00 KB (86,016 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\strmfilt.dll  
 httpapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 24.00 KB (24,576 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\httpapi.dll  
 svchost 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 14.00 KB (14,336 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\svchost.exe  
 rpcss 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 406.00 KB (415,744 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\rpcss.dll  
 ntmarta 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 120.50 KB (123,392 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\ntmarta.dll  
 wzcsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 364.50 KB (373,248 bytes) 3/24/2005  
 12:26 PM Microsoft Corporation  
 c:\windows\system32\wzcsvc.dll

rtutils 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 34.50 KB (35,328 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\rtutils.dll  
 wmi 5.2.3790.0 (srv03\_rtm.030324-2048)  
 6.50 KB (6,656 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\wmi.dll  
 dhcpcsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 113.50 KB (116,224 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\dhcpcsvc.dll  
 atl 3.05.2283 83.00 KB (84,992 bytes)  
 12/16/2005 6:15 AM Microsoft Corporation  
 c:\windows\system32\atl.dll  
 rastls 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 180.00 KB (184,320 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\rastls.dll  
 cryptui 5.131.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 496.50 KB (508,416 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\cryptui.dll  
 mprapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 89.00 KB (91,136 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\mprapi.dll  
 activeds 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 194.00 KB (198,656 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\activeds.dll  
 adslldpc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 146.00 KB (149,504 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\adslldpc.dll  
 credui 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 162.00 KB (165,888 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\credui.dll  
 rasapi32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 239.50 KB (245,248 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\rasapi32.dll  
 rasman 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 61.50 KB (62,976 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\rasman.dll  
 tapi32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 179.50 KB (183,808 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\tapi32.dll  
 raschap 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 119.50 KB (122,368 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\raschap.dll  
 schedsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 197.50 KB (202,240 bytes) 7/31/2007  
 11:34 AM Microsoft Corporation  
 c:\windows\system32\schedsvc.dll  
 wiarpc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 32.50 KB (33,280 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\wiarpc.dll

msidle 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 6.50 KB (6,656 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\msidle.dll  
 audiosrv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 40.50 KB (41,472 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\audiosrv.dll  
 wkssvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 130.00 KB (133,120 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\wkssvc.dll  
 aelupsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 26.00 KB (26,624 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\aelupsvc.dll  
 apphelp 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 146.50 KB (150,016 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\apphelp.dll  
 cryptsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 55.50 KB (56,832 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\cryptsvc.dll  
 certcli 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 227.00 KB (232,448 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\certcli.dll  
 vssapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 548.00 KB (561,152 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\vssapi.dll  
 dmserver 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 25.50 KB (26,112 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\dmserver.dll  
 es 2001.12.4720.1830 (srv03\_spl\_rtm.050324-1447)  
 233.00 KB (238,592 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\es.dll  
 pchsvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 39.00 KB (39,936 bytes) 7/31/2007  
 11:34 AM Microsoft Corporation  
 c:\windows\pchealth\helpctr\binaries\pchsvc  
 .dll  
 srsvsc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 93.50 KB (95,744 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\srsvsc.dll  
 seclogon 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 18.50 KB (18,944 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\seclogon.dll  
 sens 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 36.50 KB (37,376 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\sens.dll  
 trkwks 5.2.3790.0 (srv03\_rtm.030324-2048)  
 85.00 KB (87,040 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\trkwks.dll  
 wmiisvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 140.00 KB (143,360 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
c:\windows\system32\wbem\wmisvc.dll  
wuauerv 5.7.3790.1830 (srv03\_spl\_rtm.050324-1447)  
8.00 KB (8,192 bytes) 7/31/2007  
11:34 AM Microsoft Corporation  
c:\windows\system32\wuauerv.dll  
wuaueng 5.7.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.18 MB (1,232,896 bytes) 7/31/2007  
11:34 AM Microsoft Corporation  
c:\windows\system32\wuaueng.dll  
advpack 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
98.00 KB (100,352 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\advpack.dll  
cabinet 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
81.50 KB (83,456 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\cabinet.dll  
mspatcha 5.2.3790.0 (srv03\_rtm.030324-2048)  
29.00 KB (29,696 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\mspatcha.dll  
shfolder 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
24.50 KB (25,088 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\shfolder.dll  
winhttp 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
353.00 KB (361,472 bytes) 6/26/2007  
11:53 AM Microsoft Corporation  
c:\windows\winsxs\x86\_microsoft.windows.win  
http\_6595b64144ccf1df\_5.1.3790.1830\_x-  
ww\_74150efb\winhttp.dll  
comsvcs 2001.12.4720.1830 (srv03\_spl\_rtm.050324-  
1447) 1.19 MB (1,248,256 bytes) 7/31/2007  
11:31 AM Microsoft Corporation  
c:\windows\system32\comsvcs.dll  
browser 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
76.50 KB (78,336 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\browser.dll  
netrap 5.2.3790.0 (srv03\_rtm.030324-2048)  
11.50 KB (11,776 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\netrap.dll  
wbemcore 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
497.50 KB (509,440 bytes) 7/31/2007  
11:31 AM Microsoft Corporation  
c:\windows\system32\wbem\wbemcore.dll  
esscli 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
250.00 KB (256,000 bytes) 7/31/2007  
11:31 AM Microsoft Corporation  
c:\windows\system32\wbem\esscli.dll  
wmiutils 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
93.50 KB (95,744 bytes) 7/31/2007  
11:31 AM Microsoft Corporation  
c:\windows\system32\wbem\wmiutils.dll  
repdrvfs 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
172.50 KB (176,640 bytes) 7/31/2007  
11:31 AM Microsoft Corporation  
c:\windows\system32\wbem\repdrvfs.dll  
wmiprvsd 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
404.00 KB (413,696 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
c:\windows\system32\wbem\wmiprvsd.dll  
wbemess 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
271.50 KB (278,016 bytes) 7/31/2007  
11:31 AM Microsoft Corporation  
c:\windows\system32\wbem\wbemess.dll  
xactsrv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
90.00 KB (92,160 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\xactsrv.dll  
ncprov 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
46.50 KB (47,616 bytes) 7/31/2007  
11:31 AM Microsoft Corporation  
c:\windows\system32\wbem\ncprov.dll  
actxprxy 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
96.50 KB (98,816 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\actxprxy.dll  
netman 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
258.50 KB (264,704 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\netman.dll  
netshell 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
1.73 MB (1,812,992 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\netshell.dll  
clusapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
60.00 KB (61,440 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\clusapi.dll  
wininet 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447)  
646.00 KB (661,504 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\wininet.dll  
wzcsapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
41.00 KB (41,984 bytes) 3/24/2005  
12:26 PM Microsoft Corporation  
c:\windows\system32\wzcsapi.dll  
netcfgx 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
763.00 KB (781,312 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\netcfgx.dll  
wbemcons 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
45.50 KB (46,592 bytes) 7/31/2007  
11:31 AM Microsoft Corporation  
c:\windows\system32\wbem\wbemcons.dll  
rasdlg 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
663.00 KB (678,912 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\rasdlg.dll  
rasadhlp 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
7.50 KB (7,680 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\rasadhlp.dll  
wups 5.7.3790.1830 (srv03\_spl\_rtm.050324-1447)  
34.00 KB (34,816 bytes) 7/31/2007  
11:34 AM Microsoft Corporation  
c:\windows\system32\wups.dll  
spoolsv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
57.00 KB (58,368 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\spoolsv.exe

spoolss 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
85.00 KB (87,040 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\spoolss.dll  
localspl 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
339.00 KB (347,136 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\localspl.dll  
cnbjmon 5.2.3790.1224 (dnssrv(skatar).040514-1058)  
46.50 KB (47,616 bytes) 3/24/2005  
11:57 AM Microsoft Corporation  
c:\windows\system32\cnbjmon.dll  
pjlmon 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
15.00 KB (15,360 bytes) 3/24/2005  
12:09 PM Microsoft Corporation  
c:\windows\system32\pjlmon.dll  
tcpmon 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
47.00 KB (48,128 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\tcpmon.dll  
wsnmp32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
43.00 KB (44,032 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\wsnmp32.dll  
tcpmib 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
17.50 KB (17,920 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\tcpmib.dll  
wsock32 5.2.3790.0 (srv03\_rtm.030324-2048)  
22.00 KB (22,528 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\wsock32.dll  
mgmtapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
15.50 KB (15,872 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\mgmtapi.dll  
snmpapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
19.50 KB (19,968 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\snmpapi.dll  
usbmon 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
17.00 KB (17,408 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\usbmon.dll  
winrnr 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
17.00 KB (17,408 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\winrnr.dll  
wshqos 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
24.00 KB (24,576 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\wshqos.dll  
win32spl 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
100.50 KB (102,912 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\win32spl.dll  
inetpp 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
75.00 KB (76,800 bytes) 12/16/2005  
6:15 AM Microsoft Corporation  
c:\windows\system32\inetpp.dll  
icmp 5.2.3790.0 (srv03\_rtm.030324-2048)  
4.50 KB (4,608 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\icmp.dll  
 ersvc 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 24.00 KB (24,576 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\ersvc.dll  
 inetinfo 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 14.00 KB (14,336 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\inetinfo.exe

iisutil 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 164.00 KB (167,936 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\iisutil.dll  
 rpcref 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 4.00 KB (4,096 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\rpcref.dll  
 iisrtl 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 138.50 KB (141,824 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\iisrtl.dll  
 iisadmin 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 21.00 KB (21,504 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\iisadmin.dll

coadmin 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 62.50 KB (64,000 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\coadmin.dll  
 admwprox 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 47.00 KB (48,128 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\admwprox.dll  
 iiscfg 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 1.08 MB (1,133,056 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\iiscfg.dll  
 metadata 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 229.00 KB (234,496 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\metadata.dll

msxml3 8.70.1104.0 1.06 MB (1,107,456  
 bytes) 12/16/2005 6:15 AM Microsoft Corporation  
 c:\windows\system32\msxml3.dll

svcxext 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 43.50 KB (44,544 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\svcxext.dll  
 security 5.2.3790.0 (srv03\_rtm.030324-2048)  
 5.50 KB (5,632 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\security.dll  
 iismap 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 58.50 KB (59,904 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\iismap.dll  
 wamreg 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 54.50 KB (55,808 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\wamreg.dll  
 iisw3adm 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 211.00 KB (216,064 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\iisw3adm.dll

w3cache 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 19.00 KB (19,456 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\w3cache.dll  
 w3tp 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 13.00 KB (13,312 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\w3tp.dll  
 lonsint 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 13.00 KB (13,312 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\lonsint.dll  
 termsrv 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 239.00 KB (244,736 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
 c:\windows\system32\termsrv.dll  
 icaapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 12.50 KB (12,800 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
 c:\windows\system32\icaapi.dll  
 matlsapi 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 116.00 KB (118,784 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\matlsapi.dll  
 rdpswx 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 101.63 KB (104,072 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
 c:\windows\system32\rdpswx.dll  
 w3wp 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 7.00 KB (7,168 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\w3wp.exe  
 w3core 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 340.50 KB (348,672 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\w3core.dll  
 w3comlog 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 10.50 KB (10,752 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\w3comlog.dll

w3dt 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 38.50 KB (39,424 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\w3dt.dll  
 iisres 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 120.00 KB (122,880 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\iisres.dll  
 w3isapi 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 61.00 KB (62,464 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\w3isapi.dll  
 gzip 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 25.00 KB (25,600 bytes) 7/31/2007

4:55 PM Microsoft Corporation  
 c:\windows\system32\inetrv\gzip.dll  
 "\\?\c:\inetpub\wwwroot\tpcc.dll"

"\\?\c:\inetpub\wwwroot\tpcc.dll"

msvcr71 7.10.3052.4 340.00 KB (348,160  
 bytes) 7/31/2007 5:11 PM Microsoft Corporation  
 c:\windows\system32\msvcr71.dll  
 tpcc\_com Not Available 11.50 KB (11,776 bytes)  
 7/31/2007 5:11 PM Not Available  
 c:\inetpub\wwwroot\tpcc\_com.dll  
 tpcc\_odbc Not Available 21.00 KB (21,504 bytes)  
 7/31/2007 5:11 PM Not Available  
 c:\inetpub\wwwroot\tpcc\_odbc.dll  
 odbcb32 3.526.1830.0 (srv03\_spl\_rtm.050324-1447)  
 240.00 KB (245,760 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\odbcb32.dll  
 comdlg32 6.0.3790.1830 (srv03\_spl\_rtm.050324-1447)  
 274.50 KB (281,088 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\comdlg32.dll  
 odbcbint 3.526.1830.0 (srv03\_spl\_rtm.050324-1447)  
 92.00 KB (94,208 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\odbcbint.dll  
 sqlsrv32 2000.086.1830.00 (srv03\_spl\_rtm.050324-  
 1447) 436.00 KB (446,464 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\sqlsrv32.dll  
 sqlunirl 2000.080.0728.00 176.56 KB (180,800  
 bytes) 12/16/2005 6:15 AM Microsoft Corporation  
 c:\windows\system32\sqlunirl.dll  
 sqlsrv32 2000.086.1830.00 (srv03\_spl\_rtm.050324-  
 1447) 88.00 KB (90,112 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\sqlsrv32.rll  
 odbcbcp32 3.526.1830.0 (srv03\_spl\_rtm.050324-1447)  
 100.00 KB (102,400 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\odbcbcp32.dll  
 dbnetlib 2000.086.1830 (srv03\_spl\_rtm.050324-1447)  
 112.00 KB (114,688 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\dbnetlib.dll  
 tpcc\_com\_all 1, 0, 0, 1 104.00 KB  
 (106,496 bytes) 7/31/2007 5:11 PM  
 c:\inetpub\wwwroot\tpcc\_com\_all.dll  
 dllhost 5.2.3790.0 (srv03\_rtm.030324-2048)  
 5.50 KB (5,632 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\dllhost.exe  
 txflg 2001.12.4720.1830 (srv03\_spl\_rtm.050324-  
 1447) 96.50 KB (98,816 bytes) 12/16/2005

6:15 AM Microsoft Corporation  
 c:\windows\system32\txflg.dll  
 xolehlp 2001.12.4720.1830 (srv03\_spl\_rtm.050324-  
 1447) 10.50 KB (10,752 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
 c:\windows\system32\xolehlp.dll  
 msdtcprx 2001.12.4720.1830 (srv03\_spl\_rtm.050324-  
 1447) 455.50 KB (466,432 bytes) 7/31/2007

11:31 AM Microsoft Corporation  
 c:\windows\system32\msdtcprx.dll  
 mtxclu 2001.12.4720.1830 (srv03\_spl\_rtm.050324-1447) 77.00 KB (78,848 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\mtxclu.dll  
 resutils 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 63.50 KB (65,024 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\resutils.dll  
 catsrv 2001.12.4720.1830 (srv03\_spl\_rtm.050324-1447) 273.00 KB (279,552 bytes) 7/31/2007  
 11:31 AM Microsoft Corporation  
 c:\windows\system32\catsrv.dll  
 clbcatex 2001.12.4720.1830 (srv03\_spl\_rtm.050324-1447) 102.50 KB (104,960 bytes) 7/31/2007  
 11:31 AM Microsoft Corporation  
 c:\windows\system32\clbcatex.dll  
 rdpsnd 5.2.3790.0 (srv03\_rtm.030324-2048) 18.00 KB (18,432 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\rdpsnd.dll  
 scredir 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 28.00 KB (28,672 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\scredir.dll  
 cscui 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 319.50 KB (327,168 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\cscui.dll  
 msacm32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 22.00 KB (22,528 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\msacm32.drv  
 msacm32 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 69.50 KB (71,168 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\msacm32.dll  
 imaadp32 5.2.3790.0 (srv03\_rtm.030324-2048) 15.50 KB (15,872 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\imaadp32.acm  
 msadp32 5.2.3790.0 (srv03\_rtm.030324-2048) 14.50 KB (14,848 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\msadp32.acm  
 msg711 5.2.3790.0 (srv03\_rtm.030324-2048) 10.00 KB (10,240 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\msg711.acm  
 msgsm32 5.2.3790.0 (srv03\_rtm.030324-2048) 20.50 KB (20,992 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\msgsm32.acm  
 tssoft32 1.01 9.50 KB (9,728 bytes) 12/16/2005 6:15 AM DSP GROUP, INC.  
 c:\windows\system32\tssoft32.acm  
 tsd32 1.03 16.50 KB (16,896 bytes) 12/16/2005 6:15 AM DSP GROUP, INC.  
 c:\windows\system32\tsd32.dll  
 msg723 5.2.3790.1830 120.00 KB (122,880 bytes) 7/31/2007 11:34 AM Microsoft Corporation  
 c:\windows\system32\msg723.acm

msaud32 8.00.00.4487 288.00 KB (294,912 bytes) 12/16/2005 6:15 AM Microsoft Corporation  
 c:\windows\system32\msaud32.acm  
 printui 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 563.00 KB (576,512 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\printui.dll  
 cfgmgr32 5.2.3790.0 (srv03\_rtm.030324-2048) 17.50 KB (17,920 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\cfgmgr32.dll  
 sl\_anet 3.02 84.00 KB (86,016 bytes) 12/16/2005 6:15 AM Sipro Lab Telecom Inc.  
 c:\windows\system32\sl\_anet.acm  
 l3codeca 1, 9, 0, 0305 284.00 KB (290,816 bytes) 12/16/2005 6:15 AM Fraunhofer Institut  
 Integrierte Schaltungen IIS  
 c:\windows\system32\l3codeca.acm  
 rdpcclip 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 68.00 KB (69,632 bytes) 7/31/2007  
 11:31 AM Microsoft Corporation  
 c:\windows\system32\rdpcclip.exe  
 urlmon 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447) 673.00 KB (689,152 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32?urlmon.dll  
 explorer 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447) 1.00 MB (1,050,624 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\explorer.exe  
 browseui 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447) 1,009.00 KB (1,033,216 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\browseui.dll  
 shdocvw 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447) 1.43 MB (1,502,720 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\shdocvw.dll  
 themeui 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447) 377.50 KB (386,560 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\themeui.dll  
 msimg32 5.2.3790.0 (srv03\_rtm.030324-2048) 4.50 KB (4,608 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\msimg32.dll  
 linkinfo 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 19.00 KB (19,456 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\linkinfo.dll  
 ntshrui 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447) 140.00 KB (143,360 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\ntshrui.dll  
 webcheck 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447) 272.50 KB (279,040 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\webcheck.dll  
 stobject 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 120.50 KB (123,392 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\stobject.dll

batmeter 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447) 31.50 KB (32,256 bytes) 12/16/2005  
 Microsoft Corporation  
 c:\windows\system32\batmeter.dll  
 powrprof 6.00.3790.1830 (srv03\_spl\_rtm.050324-1447) 16.50 KB (16,896 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\powrprof.dll  
 browselc 6.00.3790.0 (srv03\_rtm.030324-2048) 62.00 KB (63,488 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\browselc.dll  
 drprov 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 14.00 KB (14,336 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\drprov.dll  
 ntlanman 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 43.50 KB (44,544 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\ntlanman.dll  
 netui0 5.2.3790.0 (srv03\_rtm.030324-2048) 75.50 KB (77,312 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\netui0.dll  
 netuil 5.2.3790.0 (srv03\_rtm.030324-2048) 184.00 KB (188,416 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\netuil.dll  
 davclnt 5.2.3790.0 (srv03\_rtm.030324-2048) 23.50 KB (24,064 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\davclnt.dll  
 shdoclc 6.00.3790.0 (srv03\_rtm.030324-2048) 588.50 KB (602,624 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\shdoclc.dll  
 wuauc1t 5.7.3790.1830 (srv03\_spl\_rtm.050324-1447) 109.50 KB (112,128 bytes) 7/31/2007  
 11:34 AM Microsoft Corporation  
 c:\windows\system32\wuauc1t.exe  
 wuaucpl 5.7.3790.1830 (srv03\_spl\_rtm.050324-1447) 160.00 KB (163,840 bytes) 7/31/2007  
 11:34 AM Microsoft Corporation  
 c:\windows\system32\wuaucpl.cpl  
 helpctr 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 778.00 KB (796,672 bytes) 7/31/2007  
 11:34 AM Microsoft Corporation  
 c:\windows\pchealth\helpctr\binaries\helpctr.exe  
 hcappres 5.2.3790.0 (srv03\_rtm.030324-2048) 6.50 KB (6,656 bytes) 7/31/2007  
 11:34 AM Microsoft Corporation  
 c:\windows\pchealth\helpctr\binaries\hcappres.dll  
 itss 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 133.50 KB (136,704 bytes) 12/16/2005  
 6:15 AM Microsoft Corporation  
 c:\windows\system32\itss.dll  
 pchshell 5.2.3790.1830 (srv03\_spl\_rtm.050324-1447) 104.50 KB (107,008 bytes) 7/31/2007  
 11:34 AM Microsoft Corporation  
 c:\windows\pchealth\helpctr\binaries\pchshell.dll  
 11.dll



```

mlang 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
577.50 KB (591,360 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\mlang.dll
mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
2.96 MB (3,108,864 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\mshtml.dll
c:\windows\system32\mshtml.dll
msls31 3.10.349.0 142.00 KB (145,408
bytes) 12/16/2005 6:15 AM Microsoft Corporation
c:\windows\system32\msls31.dll
msimtf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
156.00 KB (159,744 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\msimtf.dll
msctf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
311.00 KB (318,464 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\msctf.dll
jscript 5.6.0.8827 448.00 KB (458,752
bytes) 12/16/2005 6:15 AM Microsoft Corporation
c:\windows\system32\jscript.dll
imm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
108.00 KB (110,592 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\imm32.dll
mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
454.50 KB (465,408 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\mshtml.dll
vbscript 5.6.0.8827 392.00 KB (401,408
bytes) 12/16/2005 6:15 AM Microsoft Corporation
c:\windows\system32\vbscript.dll
msinfo 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
376.00 KB (385,024 bytes) 7/31/2007
Microsoft Corporation
11:34 AM c:\windows\pchealth\helpctr\binaries\msinfo
.dll
mfc42u 6.06.8063.0 1.11 MB (1,163,776
bytes) 12/16/2005 6:15 AM Microsoft Corporation
c:\windows\system32\mfc42u.dll
riched32 5.2.3790.0 (srv03_rtm.030324-2048)
3.50 KB (3,584 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\riched32.dll
riched20 5.31.23.1224 439.00 KB (449,536
bytes) 12/16/2005 6:15 AM Microsoft Corporation
c:\windows\system32\riched20.dll
audiodev 5.2.3790.3700 (srv03_spl_rtm.050324-1447)
470.00 KB (481,280 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\audiodev.dll
wmvcore 10.00.00.3700 (srv03_spl_rtm.050324-1447)
2.21 MB (2,314,240 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\wmvcore.dll
wmasf 10.00.00.3700 (srv03_spl_rtm.050324-1447)
220.50 KB (225,792 bytes) 12/16/2005
Microsoft Corporation
6:15 AM c:\windows\system32\wmasf.dll
helpsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
745.00 KB (762,880 bytes) 7/31/2007
Microsoft Corporation
11:34 AM

```

```

c:\windows\pchealth\helpctr\binaries\helpsv
c.exe
[Services]
Display Name Name State Start Mode
Service Type Path Error Control
Start Name Tag ID
Application Experience Lookup Service AeLookupSvc
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0
Windows Audio AudioSrv Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser Browser Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service CsiSvc Stopped Disabled
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\mscorsvw.exe Ignore LocalSystem 0
COM+ System Application COMSysApp Running
Manual Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

DCOM Server Process Launcher DcomLaunch
Running Auto Share Process
c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0
Distributed File System Dfs Stopped
Manual Own Process
c:\windows\system32\dfsrv.exe
Normal LocalSystem 0
DHCP Client Dhcp Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmdadmin Stopped Manual Share Process
c:\windows\system32\dmdadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DNS Client Dnscache Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support helpsvc Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL HTTPFilter Running Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IIS Admin Service IISADMIN Running Auto
Share Process
c:\windows\system32\inetres\inetinfo.exe
Normal LocalSystem 0
IMAPI CD-Burning COM Service ImapiService
Stopped Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process
c:\windows\system32\ismserv.exe
Normal LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped Disabled Share Process

```

```

c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Workstation lanmanworkstation Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
License Logging LicenseService Stopped
Disabled Own Process
c:\windows\system32\llssrv.exe
Normal NT AUTHORITY\NetworkService 0

TCP/IP NetBIOS Helper LmHosts Running
Auto Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mmsrvc
Stopped Disabled Own Process
c:\windows\system32\mmsrvc.exe
Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
Running Auto Own Process
c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 0
Windows Installer MSIInstaller Stopped Manual
Share Process
c:\windows\system32\msiexec.exe /v
Normal LocalSystem 0
Visual Studio 2005 Remote Debugger msvsmon80
Stopped Disabled Own Process
"c:\program files\microsoft visual studio
8\common7\ide\remote debugger\x86\msvsmon.exe"
/service msvsmon80 Ignore LocalSystem 0

Network DDE NetDDE Stopped Disabled
Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped
Disabled Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Location Awareness (NLA) Nla
Running Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0

```

```

NT LM Security Support Provider NtLmSsp
Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Office Source Engine ose Stopped
Manual Own Process "c:\program
files\common files\microsoft shared\source
engine\ose.exe" Normal LocalSystem 0

Plug and Play PlugPlay Running Auto
Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
IPSEC Services PolicyAgent Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Remote Access Auto Connection Manager RasAuto
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Access Connection Manager RasMan
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Desktop Help Session Manager RDSessMgr
Stopped Manual Own Process
c:\windows\system32\sessmgr.exe
Normal LocalSystem 0
Routing and Remote Access RemoteAccess
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Registry RemoteRegistry Running
Auto Share Process
c:\windows\system32\svchost.exe -k regsvc
Normal NT AUTHORITY\LocalService 0

Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0

Remote Procedure Call (RPC) RpcSs Running
Auto Share Process
c:\windows\system32\svchost.exe -k rpcss
Normal NT AUTHORITY\NetworkService 0

Resultant Set of Policy Provider RSoPProv
Stopped Manual Share Process
c:\windows\system32\rsopprov.exe
Normal LocalSystem 0
Special Administration Console Helper sacsvr
Stopped Manual Share Process

```

```

c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Smart Card SCardSvr Stopped Manual
Share Process
c:\windows\system32\scardsvr.exe
Ignore NT AUTHORITY\LocalService 0

Task Scheduler Schedule Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Secondary Logon seclogon Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
SharedAccess Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Running Auto Own
Process c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0

Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Auto Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0

Telephony TapiSrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Manual Share Process
c:\windows\system32\svchost.exe -k termvcs
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0

```

```

Distributed Link Tracking Server TrkSvr
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
  Running Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Terminal Services Session Directory Tssdis
  Stopped Disabled Own Process
  c:\windows\system32\tssdis.exe
  Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
  Stopped Manual Own Process
  c:\windows\system32\wdfmgr.exe
  Normal NT AUTHORITY\LocalService 0

Uninterruptible Power Supply UPS Stopped
  Manual Own Process
  c:\windows\system32\ups.exe Normal NT
  AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
  Manual Own Process
  c:\windows\system32\vds.exe Normal
  LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
  Process c:\windows\system32\vssvc.exe Normal
  LocalSystem 0
Windows Time W32Time Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k
  localservice Normal NT
  AUTHORITY\LocalService 0
World Wide Web Publishing Service W3SVC
  Running Auto Share Process
  c:\windows\system32\svchost.exe -k iissvcs
  Normal LocalSystem 0
WebClient WebClient Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k
  localservice Normal NT
  AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
  WinHttpAutoProxySvc Stopped Manual
  Share Process
  c:\windows\system32\svchost.exe -k
  localservice Normal NT
  AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
  Running Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore LocalSystem 0
Portable Media Serial Number Service WmdmPmSN
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Windows Management Instrumentation Driver Extensions
  Wmi Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped
  Manual Own Process
  c:\windows\system32\wbem\wmiaprv.exe
  Normal LocalSystem 0

```

```

Automatic Updates wuauerv Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Wireless Configuration WZCSVC Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Network Provisioning Service xmlprov Stopped
  Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0

[Program Groups]

Group Name Name User Name
Accessories Default User:Accessories
  Default User
Accessories\Accessibility Default
  User:Accessories\Accessibility Default User
Accessories\Entertainment Default
  User:Accessories\Entertainment Default User
Startup Default User:Startup Default User

Accessories All Users:Accessories All
  Users
Accessories\Accessibility All
  Users:Accessories\Accessibility All Users
Accessories\Communications All
  Users:Accessories\Communications All Users
Accessories\Entertainment All
  Users:Accessories\Entertainment All Users
Accessories\System Tools All
  Users:Accessories\System Tools All Users
Administrative Tools All
  Users:Administrative Tools All Users
Microsoft SQL Server 2005 All Users:Microsoft SQL
  Server 2005 All Users
Microsoft SQL Server 2005\Analysis Services All
  Users:Microsoft SQL Server 2005\Analysis Services All
  Users
Microsoft SQL Server 2005\Configuration Tools All
  Users:Microsoft SQL Server 2005\Configuration Tools
  All Users
Microsoft SQL Server 2005\Documentation and Tutorials
  All Users:Microsoft SQL Server
  2005\Documentation and Tutorials All Users
Microsoft SQL Server 2005\Documentation and
  Tutorials\Tutorials All Users:Microsoft SQL Server
  2005\Documentation and Tutorials\Tutorials All
  Users
Microsoft SQL Server 2005\Performance Tools All
  Users:Microsoft SQL Server 2005\Performance Tools All
  Users
Microsoft Visual Studio 2005 All Users:Microsoft
  Visual Studio 2005 All Users
Microsoft Visual Studio 2005\Visual Studio Tools All
  Users:Microsoft Visual Studio 2005\Visual Studio
  Tools All Users
Startup All Users:Startup All Users

```

```

Accessories NT AUTHORITY\SYSTEM:Accessories
  NT AUTHORITY\SYSTEM
Accessories\Accessibility NT
  AUTHORITY\SYSTEM:Accessories\Accessibility NT
  AUTHORITY\SYSTEM
Accessories\Entertainment NT
  AUTHORITY\SYSTEM:Accessories\Entertainment NT
  AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
  AUTHORITY\SYSTEM
Accessories CL146\Administrator:Accessories
  CL146\Administrator
Accessories\Accessibility
  CL146\Administrator:Accessories\Accessibili
  ty CL146\Administrator
Accessories\Entertainment
  CL146\Administrator:Accessories\Entertainme
  nt CL146\Administrator
Administrative Tools
  CL146\Administrator:Administrative Tools
  CL146\Administrator
Startup CL146\Administrator:Startup
  CL146\Administrator

[Startup Programs]

Program Command User Name Location
desktop desktop.ini NT AUTHORITY\SYSTEM
  Startup
desktop desktop.ini CL146\Administrator
  Startup
desktop desktop.ini .DEFAULT Startup
desktop desktop.ini All Users Common
  Startup

[OLE Registration]

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available
WordPad Document "%programfiles%\windows
  nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object Not
  Available
Bitmap Image mspaint.exe

[Windows Error Reporting]

Time Type Details

[Internet Settings]

[Internet Explorer]
[ Following are sub-categories of this main category
]
[Summary]

```

Item Value  
 Version 6.0.3790.1830  
 Build 63790.1830  
 Application Path C:\Program Files\Internet Explorer  
 Language English (United States)  
 Active Printer Not Available

Cipher Strength 128-bit  
 Content Advisor Disabled  
 IEAK Install No

[File Versions]

File	Version	Size	Date	Path
actxprxy.dll	6.0.3790.1830	97 KB	12/16/2005 6:15:06 AM	C:\WINDOWS\system32 Microsoft Corporation
advpack.dll	6.0.3790.1830	98 KB	12/16/2005 6:15:06 AM	C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx	6.0.3790.0	90 KB	12/16/2005 6:15:07 AM	C:\WINDOWS\system32 Microsoft Corporation
browsecl.dll	6.0.3790.0	62 KB	12/16/2005 6:15:09 AM	C:\WINDOWS\system32 Microsoft Corporation
browseui.dll	6.0.3790.1830	1,009 KB	12/16/2005 6:15:09 AM	C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll	6.0.3790.1830	149 KB	12/16/2005 6:15:09 AM	C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll	5.82.3790.1830	585 KB	12/16/2005 6:15:10 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtrans.dll	6.3.3790.1830	205 KB	12/16/2005 6:15:19 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll	6.3.3790.1830	355 KB	12/16/2005 6:15:19 AM	C:\WINDOWS\system32 Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available	Not Available	Not Available
iedkcs32.dll	6.0.3790.1830	324 KB	12/16/2005 6:15:23 AM	C:\WINDOWS\system32 Microsoft Corporation

iepeers.dll	6.0.3790.1830	248 KB	12/16/2005 6:15:23 AM	C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll	6.0.3790.1830	61 KB	12/16/2005 6:15:23 AM	C:\WINDOWS\system32 Microsoft Corporation
ieunit.inf	Not Available	24 KB	12/16/2005 6:15:23 AM	C:\WINDOWS\system32 Not Available
ieexplore.exe	6.0.3790.1830	92 KB	12/16/2005 6:15:23 AM	C:\Program Files\Internet Explorer Microsoft Corporation
imgutil.dll	6.0.3790.1830	38 KB	12/16/2005 6:15:24 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcpl.cpl	6.0.3790.1830	358 KB	12/16/2005 6:15:24 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcplc.dll	6.0.3790.0	109 KB	12/16/2005 6:15:24 AM	C:\WINDOWS\system32 Microsoft Corporation
inseng.dll	6.0.3790.1830	94 KB	12/16/2005 6:15:24 AM	C:\WINDOWS\system32 Microsoft Corporation
mlang.dll	6.0.3790.1830	578 KB	12/16/2005 6:15:31 AM	C:\WINDOWS\system32 Microsoft Corporation
msencode.dll	2002.10.4.0	112 KB	12/16/2005 6:15:35 AM	C:\WINDOWS\system32 ?????w??
mshta.exe	6.0.3790.1830	30 KB	12/16/2005 6:15:35 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll	6.0.3790.1830	3,036 KB	12/16/2005 6:15:35 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.tlb	6.0.3790.1830	1,320 KB	12/16/2005 6:15:35 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll	6.0.3790.1830	455 KB	12/16/2005 6:15:35 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmlr.dll	6.0.3790.1830	56 KB	12/16/2005 6:15:35 AM	C:\WINDOWS\system32 Microsoft Corporation
msident.dll	6.0.3790.1830	48 KB	12/16/2005 6:15:35 AM	C:\WINDOWS\system32 Microsoft Corporation
msidntld.dll	6.0.3790.0	15 KB	12/16/2005 6:15:35 AM	

msieftp.dll	6.0.3790.1830	244 KB	12/16/2005 6:15:35 AM	C:\WINDOWS\system32 Microsoft Corporation
msrating.dll	6.0.3790.1830	144 KB	12/16/2005 6:15:36 AM	C:\WINDOWS\system32 Microsoft Corporation
mstime.dll	6.0.3790.1830	523 KB	12/16/2005 6:15:36 AM	C:\WINDOWS\system32 Microsoft Corporation
occache.dll	6.0.3790.1830	94 KB	12/16/2005 6:15:40 AM	C:\WINDOWS\system32 Microsoft Corporation
proctexe.ocx	6.3.3790.1830	83 KB	12/16/2005 6:15:42 AM	C:\WINDOWS\system32 Intel Corporation
sendmail.dll	6.0.3790.1830	56 KB	12/16/2005 6:15:45 AM	C:\WINDOWS\system32 Microsoft Corporation
shdoclc.dll	6.0.3790.0	589 KB	12/16/2005 6:15:46 AM	C:\WINDOWS\system32 Microsoft Corporation
shdocvw.dll	6.0.3790.1830	1,468 KB	12/16/2005 6:15:46 AM	C:\WINDOWS\system32 Microsoft Corporation
shfolder.dll	6.0.3790.1830	25 KB	12/16/2005 6:15:46 AM	C:\WINDOWS\system32 Microsoft Corporation
shlwapi.dll	6.0.3790.1830	314 KB	12/16/2005 6:15:46 AM	C:\WINDOWS\system32 Microsoft Corporation
tdc.ocx	1.3.0.3130	58 KB	12/16/2005 6:15:52 AM	C:\WINDOWS\system32 Microsoft Corporation
url.dll	6.0.3790.1830	37 KB	12/16/2005 6:15:53 AM	C:\WINDOWS\system32 Microsoft Corporation
urlmon.dll	6.0.3790.1830	673 KB	12/16/2005 6:15:53 AM	C:\WINDOWS\system32 Microsoft Corporation
webcheck.dll	6.0.3790.1830	273 KB	12/16/2005 6:15:55 AM	C:\WINDOWS\system32 Microsoft Corporation
wininet.dll	6.0.3790.1830	646 KB	12/16/2005 6:15:55 AM	C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]

Item Value

```

Connection Preference      Never dial

LAN Settings

AutoConfigProxy      wininet.dll
AutoProxyDetectMode  Disabled
AutoConfigURL
Proxy                 Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category
]
[Summary]

Item      Value
Page Refresh Type      Automatic
Temporary Internet Files Folder      C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space      Not Available
Available Disk Space      Not Available
Maximum Cache Size      Not Available
Available Cache Size      Not Available

[List of Objects]

Program File      Status      CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category
]
[Summary]

Item      Value
Content Advisor      Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone      Security Level
My Computer      Custom

```

```

Local intranet      Custom
Trusted sites      Custom
Internet High
Restricted sites      Custom

```

## Microsoft COM Component Configuration Parameters

The component services tool in Windows 2003 was used to change the queue settings for the TPCC COM+ queue components. All tpcc queue components were set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The construction string was Server = myserver; UID= sa; pwd=; DATABASE= tpcc; The single queue TpccAllTxn object was used, with the Min and Max both being set to 60 queues. Delivery threads were set under the TPCC key in the registry.

## HP Specific Drivers

The following Microsoft Windows 2003 Server device drivers were replaced with HP-specific device drivers: The Microsoft HP Smart Array P800/E500 SAS Controller Controller default device driver (hpcissb.sys) was replaced with the HP Smart Array P800/E500 SAS Controller for database data controllers. Non-miniport Performance Drivers for Microsoft Windows 2003 Server (hpcqissb.sys and hpcqissd.sys).

## Server Bus Performance Driver Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpcqissb
Class Name:      <NO CLASS>
Last Write Time: 12/19/2007 - 10:22 AM
Value 0
Name:            Type
Type:            REG_DWORD

```

```

Data:            0x1

Value 1
Name:            Start
Type:            REG_DWORD
Data:            0

Value 2
Name:            ErrorControl
Type:            REG_DWORD
Data:            0x1

Value 3
Name:            Tag
Type:            REG_DWORD
Data:            0x102

Value 4
Name:            ImagePath
Type:            REG_EXPAND_SZ
Data:            system32\DRIVERS\hpcqissb.sys

Value 5
Name:            DisplayName
Type:            REG_SZ
Data:            Smart Array Controllers Non-
Miniport Bus Driver

Value 6
Name:            Group
Type:            REG_SZ
Data:            port

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpcqissb\Parameters
Class Name:      <NO CLASS>
Last Write Time: 11/7/2007 - 10:50 AM
Value 0
Name:            CompletionMode
Type:            REG_DWORD
Data:            0x2

Value 1
Name:            CosTimerRate
Type:            REG_DWORD
Data:            0x2

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpcqissb\Parameters\Controller5
Class Name:      <NO CLASS>
Last Write Time: 10/4/2007 - 12:53 AM
Value 0
Name:            CompletionMode
Type:            REG_DWORD
Data:            0x1

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Security
Class Name: <NO CLASS>
Last Write Time: 6/22/2007 - 1:39 PM
Value 0
Name: Security
Type: REG_BINARY
Data:
00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00 .....Ä.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 ý.....
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....ý...
00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00
00 18 00 .....
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 ý.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 .....
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 .....
00000080 01 01 00 00 00 00 00 05 - 06 00 00 00 00
00 14 00 .....
00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 .....
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 .....ý...
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.
000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 .....

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissb\Enum
Class Name: <NO CLASS>
Last Write Time: 12/19/2007 - 10:22 AM
Value 0
Name: 0
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&356d70
36&0&00000010

Value 1
Name: Count
Type: REG_DWORD
Data: 0x7

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x7

Value 3
Name: 1
Type: REG_SZ

```

```

Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&14cdf4
29&0&00080010

Value 4
Name: 2
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&8c2005
8&0&0038

Value 5
Name: 3
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&79c23&
0&0030

Value 6
Name: 4
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&1ab8b1
8d&0&0028

Value 7
Name: 5
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&237315
c2&0&0020

Value 8
Name: 6
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&efc3e7
9&0&0018

```

## Server Disk Device Performance Driver Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissd
Class Name: <NO CLASS>
Last Write Time: 12/19/2007 - 10:22 AM
Value 0
Name: Type
Type: REG_DWORD
Data: 0x1

Value 1
Name: Start

```

```

Type: REG_DWORD
Data: 0

Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 3
Name: Tag
Type: REG_DWORD
Data: 0x102

Value 4
Name: ImagePath
Type: REG_EXPAND_SZ
Data: system32\DRIVERS\hpqcissd.sys

Value 5
Name: DisplayName
Type: REG_SZ
Data: Smart Array Controllers Non-
Miniport Disk Driver

Value 6
Name: Group
Type: REG_SZ
Data: Primary Disk

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
hpqcissd\Security
Class Name: <NO CLASS>
Last Write Time: 6/22/2007 - 1:41 PM
Value 0
Name: Security
Type: REG_BINARY
Data:
00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00 .....Ä.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 ý.....
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....ý...
00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00
00 18 00 .....
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 ý.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 .....
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 .....
00000080 01 01 00 00 00 00 00 05 - 06 00 00 00 00
00 14 00 .....
00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 .....
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 .....ý...
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.

```

000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12  
00 00 00 .....

Key Name:

HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\  
hpqcissd\Enum  
Class Name: <NO CLASS>  
Last Write Time: 12/19/2007 - 10:22 AM

Value 0

Name: 0  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0000004000000000

Value 1

Name: Count  
Type: REG\_DWORD  
Data: 0x37

Value 2

Name: NextInstance  
Type: REG\_DWORD  
Data: 0x37

Value 3

Name: 1  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0100004000000000

Value 4

Name: 2  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0200004000000000

Value 5

Name: 3  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0300004000000000

Value 6

Name: 4  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0400004000000000

Value 7

Name: 5  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0500004000000000

Value 8

Name: 6  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0600004000000000

Value 9

Name: 7  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0700004000000000

Value 10

Name: 8  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0800004000000000

Value 11

Name: 9  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1bbb46d2&0&  
0900004000000000

Value 12

Name: 10  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0000004000000000

Value 13

Name: 11  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0100004000000000

Value 14

Name: 12  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0200004000000000

Value 15

Name: 13  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0300004000000000

Value 16

Name: 14  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0400004000000000

Value 17

Name: 15  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0500004000000000

Value 18

Name: 16  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0600004000000000

Value 19

Name: 17  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0700004000000000

Value 20

Name: 18  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0800004000000000

Value 21

Name: 19  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\7&1724fe17&0&  
0900004000000000

Value 22

Name: 20  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&00  
00004000000000

Value 23

Name: 21  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&01  
00004000000000

Value 24

Name: 22  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&02  
00004000000000

Value 25

Name: 23  
Type: REG\_SZ  
Data:

HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&03  
00004000000000

Value 26

Name: 24  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&04  
00004000000000

Value 27  
Name: 25  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&05  
00004000000000

Value 28  
Name: 26  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&06  
00004000000000

Value 29  
Name: 27  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&07  
00004000000000

Value 30  
Name: 28  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&08  
00004000000000

Value 31  
Name: 29  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&f79742&0&09  
00004000000000

Value 32  
Name: 30  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&28b0a89c&0&  
0000004000000000

Value 33  
Name: 31  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&15911583&0&  
0000004000000000

Value 34  
Name: 32  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&15911583&0&  
0100004000000000

Value 35

Name: 33  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&15911583&0&  
0200004000000000

Value 36  
Name: 34  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&15911583&0&  
0300004000000000

Value 37  
Name: 35  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&15911583&0&  
0400004000000000

Value 38  
Name: 36  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&15911583&0&  
0500004000000000

Value 39  
Name: 37  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&15911583&0&  
0600004000000000

Value 40  
Name: 38  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&15911583&0&  
0700004000000000

Value 41  
Name: 39  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&51be01&0&00  
00004000000000

Value 42  
Name: 40  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&51be01&0&01  
00004000000000

Value 43  
Name: 41  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&51be01&0&02  
00004000000000

Value 44

Name: 42  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&51be01&0&03  
00004000000000

Value 45  
Name: 43  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&51be01&0&04  
00004000000000

Value 46  
Name: 44  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&51be01&0&05  
00004000000000

Value 47  
Name: 45  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&51be01&0&06  
00004000000000

Value 48  
Name: 46  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&51be01&0&07  
00004000000000

Value 49  
Name: 47  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&1350cffb&0&  
0000004000000000

Value 50  
Name: 48  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&1350cffb&0&  
0100004000000000

Value 51  
Name: 49  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&1350cffb&0&  
0200004000000000

Value 52  
Name: 50  
Type: REG\_SZ  
Data:  
HPQCISS\Disk&VEN\_HP&PROD\_LOGICAL\_VOLUME\5&1350cffb&0&  
0300004000000000

Value 53



```

Name:          51
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1350cffb&0&
0400004000000000

Value 54
Name:          52
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1350cffb&0&
0500004000000000

Value 55
Name:          53
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1350cffb&0&
0600004000000000

Value 56
Name:          54
Type:          REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1350cffb&0&
0700004000000000

```

---

## Internet Information Server Registry Parameters

---

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
InetInfo
Class Name:      <NO CLASS>
Last Write Time: 12/7/2005 - 1:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
InetInfo\Parameters
Class Name:      <NO CLASS>
Last Write Time: 9/14/2006 - 8:55 AM

Value 0
Name:            ListenBackLog
Type:            REG_DWORD
Data:            0x8ca0

Value 1
Name:            PoolThreadLimit
Type:            REG_DWORD
Data:            0x1ffc

Value 2
Name:            MaxPoolThreads
Type:            REG_DWORD

```

```

Data:            0xffe

Value 3
Name:            ThreadTimeout
Type:            REG_DWORD
Data:            0x15180

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
InetInfo\Performance
Class Name:      <NO CLASS>
Last Write Time: 12/7/2005 - 1:51 PM

Value 0
Name:            Library
Type:            REG_SZ
Data:            infoctrs.dll

Value 1
Name:            Open
Type:            REG_SZ
Data:            OpenINFOPerformanceData

Value 2
Name:            Close
Type:            REG_SZ
Data:            CloseINFOPerformanceData

Value 3
Name:            Collect
Type:            REG_SZ
Data:            CollectINFOPerformanceData

Value 4
Name:            PerfIniFile
Type:            REG_SZ
Data:            infoctrs.ini

Value 5
Name:            Last Counter
Type:            REG_DWORD
Data:            0xc4c

Value 6
Name:            Last Help
Type:            REG_DWORD
Data:            0xc4d

Value 7
Name:            First Counter
Type:            REG_DWORD
Data:            0xc0c

Value 8
Name:            First Help
Type:            REG_DWORD
Data:            0xc0d

Value 9
Name:            Object List
Type:            REG_SZ
Data:            3084

```

```

Value 10
Name:            Library Validation Code
Type:            REG_BINARY
Data:
00000000 00 fa 22 9f 67 fb c5 01 - 00 20 00 00 00
00 00 00 .u".guA.. .....
```

---

## Microsoft SQL Server 2005 Installation Procedures

---

Microsoft SQL Server 2005 Enterprise (x64) Edition  
Installation Procedures  
Type of installation: custom  
During the custom installation, use the default  
settings for all except the following two areas:  
Services accounts:  
SQL Server - local system account  
SQL Server Agent - local system account  
Set the sort order/collation as Latin1\_General / BIN

---

## HP ROM Based System Utility Configuration

---

This utility can be accessed by pressing F9 during  
POST. All settings are default except under advanced  
settings / processor settings the adjacent sector  
prefetch and hardware prefetcher were disabled. Under  
system options, "Power regulator for ProLiant" was  
set to "HP static high performance mode".

---

## Database Server System Configuration

---

System Information report written at: 11/06/07  
14:24:04  
System Name: VIOLET  
[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003 Enterprise x64 Edition
Version	5.2.3790 Service Pack 2 Build 3790
Other OS Description	R2
OS Manufacturer	Microsoft Corporation

```

System Name          VIOLET
System Manufacturer  HP
System Model         ProLiant ML370 G5
System Type          x64-based PC
Processor EM64T Family 6 Model 23 Stepping 6
GenuineIntel ~3167 Mhz
Processor EM64T Family 6 Model 23 Stepping 6
GenuineIntel ~3167 Mhz
Processor EM64T Family 6 Model 23 Stepping 6
GenuineIntel ~3167 Mhz
Processor EM64T Family 6 Model 23 Stepping 6
GenuineIntel ~3167 Mhz
Processor EM64T Family 6 Model 23 Stepping 6
GenuineIntel ~3167 Mhz
Processor EM64T Family 6 Model 23 Stepping 6
GenuineIntel ~3167 Mhz
Processor EM64T Family 6 Model 23 Stepping 6
GenuineIntel ~3167 Mhz
Processor EM64T Family 6 Model 23 Stepping 6
GenuineIntel ~3167 Mhz
BIOS Version/Date   HP P57, 10/4/2007
SMBIOS Version      2.4
Windows Directory   C:\WINDOWS
System Directory    C:\WINDOWS\system32
Boot Device          \Device\HarddiskVolume56
Locale              United States
Hardware Abstraction Layer Version =
"5.2.3790.3959 (srv03_sp2_rtm.070216-1710)"
User Name           VIOLET\Administrator
Time Zone           Central Standard Time
Total Physical Memory 64,509.66 MB
Available Physical Memory 61.27 GB
Total Virtual Memory 63.45 GB
Available Virtual Memory 63.22 GB
Page File Space     2.00 GB
Page File           C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device
I/O Port 0x0000A000-0x0000AFFF PCI standard
PCI-to-PCI bridge
I/O Port 0x0000A000-0x0000AFFF Smart Array
P800 Controller (Non-Miniport)

I/O Port 0x00000000-0x00000CF7 PCI bus
I/O Port 0x00000000-0x00000CF7 Direct memory
access controller

IRQ 5 Base System Device
IRQ 5 PCI Device

I/O Port 0x00009000-0x00009FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00009000-0x00009FFF Smart Array
P800 Controller (Non-Miniport)

I/O Port 0x00006000-0x00006FFF PCI standard
PCI-to-PCI bridge

```

```

I/O Port 0x00006000-0x00006FFF Smart Array
P800 Controller (Non-Miniport)

I/O Port 0x0000B000-0x0000BFFF PCI standard
PCI-to-PCI bridge
I/O Port 0x0000B000-0x0000BFFF Smart Array
P800 Controller (Non-Miniport)

IRQ 16 PCI standard PCI-to-PCI bridge
IRQ 16 Smart Array P800 Controller (Non-Miniport)

IRQ 16 PCI standard PCI-to-PCI bridge
IRQ 16 HP NC3731 Virtual Bus Device
IRQ 16 Standard Universal PCI to USB Host
Controller
IRQ 16 Standard Enhanced PCI to USB Host
Controller

Memory Address 0xFD300000-0xFD6FFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xFD300000-0xFD6FFFFFF PCI standard
PCI-to-PCI bridge

IRQ 17 PCI standard PCI-to-PCI bridge
IRQ 17 Smart Array P800 Controller (Non-Miniport)

IRQ 17 PCI standard PCI-to-PCI bridge
IRQ 17 HP NC3731 Virtual Bus Device
IRQ 17 Standard Universal PCI to USB Host
Controller

I/O Port 0x00005000-0x00007FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00005000-0x00007FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00005000-0x00007FFF Smart Array
P800 Controller (Non-Miniport)

IRQ 18 PCI standard PCI-to-PCI bridge
IRQ 18 Smart Array P800 Controller (Non-Miniport)

IRQ 18 Smart Array P800 Controller (Non-Miniport)

IRQ 18 Smart Array P800 Controller (Non-Miniport)

IRQ 18 Standard Universal PCI to USB Host
Controller

IRQ 19 Smart Array P800 Controller (Non-Miniport)

IRQ 19 Smart Array P800 Controller (Non-Miniport)

IRQ 19 Standard Universal PCI to USB Host
Controller

Memory Address 0xA0000-0xBFFFF PCI bus
Memory Address 0xA0000-0xBFFFF Standard VGA
Graphics Adapter

Memory Address 0xFA000000-0xFBFFFFFF PCI standard
PCI-to-PCI bridge

```

```

Memory Address 0xFA000000-0xFBFFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xFA000000-0xFBFFFFFF HP NC3731
Virtual Bus Device

Memory Address 0xF8000000-0xF9FFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xF8000000-0xF9FFFFFF PCI standard
PCI-to-PCI bridge
Memory Address 0xF8000000-0xF9FFFFFF HP NC3731
Virtual Bus Device

I/O Port 0x00007000-0x00007FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00007000-0x00007FFF Smart Array
P600 Controller

I/O Port 0x00004000-0x00004FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00004000-0x00004FFF Smart Array
P800 Controller (Non-Miniport)

I/O Port 0x00008000-0x00008FFF PCI standard
PCI-to-PCI bridge
I/O Port 0x00008000-0x00008FFF Smart Array
P800 Controller (Non-Miniport)

[DMA]

Resource Device Status
Channel 7 Direct memory access controller OK

[Forced Hardware]

Device PNP Device ID

[I/O]

Resource Device Status
0x00000000-0x00000CF7 PCI bus OK
0x00000000-0x00000CF7 Direct memory access
controller OK
0x00000D00-0x0000FFFF PCI bus OK
0x00005000-0x00007FFF PCI standard PCI-to-PCI
bridge OK
0x00005000-0x00007FFF PCI standard PCI-to-PCI
bridge OK
0x00005000-0x00007FFF PCI standard PCI-to-PCI
bridge OK
0x00005000-0x00007FFF Smart Array P800
Controller (Non-Miniport) OK
0x00006000-0x00006FFF PCI standard PCI-to-PCI
bridge OK
0x00006000-0x00006FFF Smart Array P800
Controller (Non-Miniport) OK
0x00007000-0x00007FFF PCI standard PCI-to-PCI
bridge OK
0x00007000-0x00007FFF Smart Array P600
Controller OK
0x00004000-0x00004FFF PCI standard PCI-to-PCI
bridge OK

```

0x00004000-0x00004FFF Smart Array P800  
 Controller (Non-Miniport) OK  
 0x00008000-0x00008FFF PCI standard PCI-to-PCI  
 bridge OK  
 0x00008000-0x00008FFF Smart Array P800  
 Controller (Non-Miniport) OK  
 0x00009000-0x00009FFF PCI standard PCI-to-PCI  
 bridge OK  
 0x00009000-0x00009FFF Smart Array P800  
 Controller (Non-Miniport) OK  
 0x0000A000-0x0000AFFF PCI standard PCI-to-PCI  
 bridge OK  
 0x0000A000-0x0000AFFF Smart Array P800  
 Controller (Non-Miniport) OK  
 0x0000B000-0x0000BFFF PCI standard PCI-to-PCI  
 bridge OK  
 0x0000B000-0x0000BFFF Smart Array P800  
 Controller (Non-Miniport) OK  
 0x00001000-0x0000101F Standard Universal PCI  
 to USB Host Controller OK  
 0x00001020-0x0000103F Standard Universal PCI  
 to USB Host Controller OK  
 0x00001040-0x0000105F Standard Universal PCI  
 to USB Host Controller OK  
 0x00001060-0x0000107F Standard Universal PCI  
 to USB Host Controller OK  
 0x00003000-0x000030FF Standard VGA Graphics  
 Adapter OK  
 0x00003B00-0x00003BBB Standard VGA Graphics  
 Adapter OK  
 0x00003C00-0x00003DFF Standard VGA Graphics  
 Adapter OK  
 0x00002800-0x000028FF Base System Device OK  
  
 0x00003400-0x000034FF Base System Device OK  
  
 0x00003800-0x0000381F Standard Universal PCI  
 to USB Host Controller OK  
 0x00000070-0x00000077 Motherboard resources  
 OK  
 0x00000408-0x0000040F Motherboard resources  
 OK  
 0x000004D0-0x000004D1 Motherboard resources  
 OK  
 0x00000020-0x0000003F Motherboard resources  
 OK  
 0x000000A0-0x000000BF Motherboard resources  
 OK  
 0x00000090-0x0000009F Motherboard resources  
 OK  
 0x00000050-0x00000053 Motherboard resources  
 OK  
 0x00000700-0x0000071F Motherboard resources  
 OK  
 0x00000800-0x0000083F Motherboard resources  
 OK  
 0x00000900-0x0000097F Motherboard resources  
 OK  
 0x00000010-0x0000001F Motherboard resources  
 OK  
 0x00000C80-0x00000C83 Motherboard resources  
 OK

0x00000CD4-0x00000CD7 Motherboard resources  
 OK  
 0x00000F50-0x00000F58 Motherboard resources  
 OK  
 0x000000F0-0x000000F0 Motherboard resources  
 OK  
 0x00000CA0-0x00000CA1 Motherboard resources  
 OK  
 0x00000CA4-0x00000CA5 Motherboard resources  
 OK  
 0x000002F8-0x000002FF Motherboard resources  
 OK  
 0x00000CA2-0x00000CA3 OK  
 0x00000040-0x00000043 System timer OK  
  
 0x00000080-0x0000008F Direct memory access  
 controller OK  
 0x000000C0-0x000000DF Direct memory access  
 controller OK  
 0x00000061-0x00000061 System speaker OK  
  
 0x00000060-0x00000060 Standard 101/102-Key or  
 Microsoft Natural PS/2 Keyboard OK  
 0x00000064-0x00000064 Standard 101/102-Key or  
 Microsoft Natural PS/2 Keyboard OK  
 0x0000002E-0x0000002F Extended IO Bus OK  
  
 0x0000004E-0x0000004F Extended IO Bus OK  
  
 0x00000620-0x0000065F Extended IO Bus OK  
  
 0x00000680-0x0000069F Extended IO Bus OK  
  
 0x00000600-0x0000061F Extended IO Bus OK  
  
 0x00000660-0x0000067F Extended IO Bus OK  
  
 0x00000300-0x0000030F Extended IO Bus OK  
  
 0x000003F8-0x000003FF Communications Port  
 (COM1) OK  
 0x00000500-0x0000050F Standard Dual Channel  
 PCI IDE Controller OK  
 0x000001F0-0x000001F7 Primary IDE Channel OK  
  
 0x000003F6-0x000003F6 Primary IDE Channel OK  
  
 0x00000170-0x00000177 Secondary IDE Channel  
 OK  
 0x00000376-0x00000376 Secondary IDE Channel  
 OK  
  
 [IRQs]  
 Resource Device Status  
 IRQ 9 Microsoft ACPI-Compliant System OK  
 IRQ 16 PCI standard PCI-to-PCI bridge OK  
 IRQ 16 Smart Array P800 Controller (Non-Miniport)  
 OK  
 IRQ 16 PCI standard PCI-to-PCI bridge OK

IRQ 16 HP NC373i Virtual Bus Device OK  
 IRQ 16 Standard Universal PCI to USB Host  
 Controller OK  
 IRQ 16 Standard Enhanced PCI to USB Host  
 Controller OK  
 IRQ 17 PCI standard PCI-to-PCI bridge OK  
  
 IRQ 17 Smart Array P800 Controller (Non-Miniport)  
 OK  
 IRQ 17 PCI standard PCI-to-PCI bridge OK  
  
 IRQ 17 HP NC373i Virtual Bus Device OK  
 IRQ 17 Standard Universal PCI to USB Host  
 Controller OK  
 IRQ 18 PCI standard PCI-to-PCI bridge OK  
  
 IRQ 18 Smart Array P800 Controller (Non-Miniport)  
 OK  
 IRQ 18 Smart Array P800 Controller (Non-Miniport)  
 OK  
 IRQ 18 Smart Array P800 Controller (Non-Miniport)  
 OK  
 IRQ 18 Standard Universal PCI to USB Host  
 Controller OK  
 IRQ 27 Smart Array P600 Controller OK  
 IRQ 19 Smart Array P800 Controller (Non-Miniport)  
 OK  
 IRQ 19 Smart Array P800 Controller (Non-Miniport)  
 OK  
 IRQ 19 Standard Universal PCI to USB Host  
 Controller OK  
 IRQ 5 Base System Device OK  
 IRQ 5 PCI Device OK  
 IRQ 10 Base System Device OK  
 IRQ 22 Standard Universal PCI to USB Host  
 Controller OK  
 IRQ 0 System timer OK  
 IRQ 1 Standard 101/102-Key or Microsoft Natural  
 PS/2 Keyboard OK  
 IRQ 12 PS/2 Compatible Mouse OK  
 IRQ 4 Communications Port (COM1) OK  
 IRQ 14 Primary IDE Channel OK  
  
 [Memory]  
 Resource Device Status  
 0xA0000-0xBFFFF PCI bus OK  
 0xA0000-0xBFFFF Standard VGA Graphics Adapter OK  
  
 0xD0000000-0xDFFFFFFF PCI bus OK  
 0xF0000000-0xFEBFFFFFFF PCI bus OK  
 0xFD200000-0xFD7FFFFFFF PCI standard PCI-to-PCI  
 bridge OK  
 0xFD300000-0xFD6FFFFFFF PCI standard PCI-to-PCI  
 bridge OK  
 0xFD300000-0xFD6FFFFFFF PCI standard PCI-to-PCI  
 bridge OK  
 0xFD400000-0xFD4FFFFFFF Smart Array P800  
 Controller (Non-Miniport) OK  
 0xFD3F0000-0xFD3F0FFFF Smart Array P800  
 Controller (Non-Miniport) OK  
 0xFD500000-0xFD6FFFFFFF PCI standard PCI-to-PCI  
 bridge OK

```

0xFD600000-0xFD6FFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFD5F0000-0xFD5F0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFD700000-0xFD7FFFFF PCI standard PCI-to-PCI
bridge OK
0xFD7F0000-0xFD7F1FFF Smart Array P600
Controller OK
0xFD780000-0xFD7BFFFF Smart Array P600
Controller OK
0xFD000000-0xFD1FFFFF PCI standard PCI-to-PCI
bridge OK
0xFD100000-0xFD1FFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFD0F0000-0xFD0F0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFD800000-0xFD9FFFFF PCI standard PCI-to-PCI
bridge OK
0xFD900000-0xFD9FFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFD8F0000-0xFD8F0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFDA00000-0xFDBFFFFF PCI standard PCI-to-PCI
bridge OK
0xFDB00000-0xFDBFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFDAF0000-0xFDAF0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFDC00000-0xFDDFFFFF PCI standard PCI-to-PCI
bridge OK
0xFDD00000-0xFDDFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFDCF0000-0xFDCF0FFF Smart Array P800
Controller (Non-Miniport) OK
0xFDE00000-0xFDFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFDF00000-0xFDFFFFFF Smart Array P800
Controller (Non-Miniport) OK
0xFDEF0000-0xFDEF0FFF Smart Array P800
Controller (Non-Miniport) OK
0xF8000000-0xF9FFFFFF PCI standard PCI-to-PCI
bridge OK
0xF8000000-0xF9FFFFFF PCI standard PCI-to-PCI
bridge OK
0xF8000000-0xF9FFFFFF HP NC373i Virtual Bus
Device OK
0xFA000000-0xFBFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFA000000-0xFBFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFA000000-0xFBFFFFFF HP NC373i Virtual Bus
Device OK
0xF7DF0000-0xF7DF03FF Standard Enhanced PCI
to USB Host Controller OK
0xD8000000-0xDFFFFFFF Standard VGA Graphics
Adapter OK
0xF7FF0000-0xF7FFFFFF Standard VGA Graphics
Adapter OK
0xF7FE0000-0xF7FE01FF Base System Device OK

0xF7FD0000-0xF7FD07FF Base System Device OK

```

```

0xF7FC0000-0xF7FC1FFF Base System Device OK
0xF7F00000-0xF7F7FFFF Base System Device OK
0xF7EF0000-0xF7EF00FF PCI Device OK
0xE0000000-0xEFFFFFFF Motherboard resources
OK
0xFE000000-0xFEFFFFFF Motherboard resources
OK
0xFED00000-0xFED003FF High precision event
timer OK

[Components]

[Multimedia]

[Audio Codecs]
CODEC Manufacturer Description
Status File Version Size
Creation Date
c:\windows\system32\imaadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\IMAADP32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
24.00 KB (24,576 bytes) 12/19/2005
8:37 AM
c:\windows\system32\msadp32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSADP32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
23.50 KB (24,064 bytes) 12/19/2005
8:37 AM
c:\windows\system32\msg711.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSG711.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
13.50 KB (13,824 bytes) 12/19/2005
8:37 AM
c:\windows\system32\msgsm32.acm Microsoft
Corporation OK
C:\WINDOWS\system32\MSGSM32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
34.50 KB (35,328 bytes) 12/19/2005
8:37 AM
c:\windows\system32\tsssoft32.acm DSP GROUP,
INC. OK
C:\WINDOWS\system32\TSSOFT32.ACM
1.01 13.50 KB (13,824 bytes)
12/19/2005 8:39 AM

[Video Codecs]
CODEC Manufacturer Description
Status File Version Size
Creation Date
c:\windows\system32\msyuv.dll Microsoft Corporation
OK

```

```

C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 21.00 KB (21,504 bytes)
3/24/2005 11:21 AM
c:\windows\system32\msvidc32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSVIDC32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
43.00 KB (44,032 bytes) 12/19/2005
8:37 AM
c:\windows\system32\iyuv_32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\IYUV_32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
52.50 KB (53,760 bytes) 3/24/2005
11:19 AM
c:\windows\system32\tscopyuv.dll Microsoft
Corporation OK
C:\WINDOWS\system32\TSBYUV.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
12.50 KB (12,800 bytes) 3/24/2005
11:34 AM
c:\windows\system32\mrle32.dll Microsoft
Corporation OK
C:\WINDOWS\system32\MSRLE32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
15.50 KB (15,872 bytes) 12/19/2005
8:37 AM

[CD-ROM]
Item Value
Drive D:
Description CD-ROM Drive
Media Loaded No
Media Type CD-ROM
Name HL-DT-ST CD-ROM GCR-8486B
Manufacturer (Standard CD-ROM drives)
Status OK
Transfer Rate Not Available
SCSI Target ID 0
PNP Device ID IDE\CDROMHL-DT-ST_CD-ROM_GCR-
8486B_2.00_5&5FD9AC6&0.0.0
Driver c:\windows\system32\drivers\cdrom.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 75.50 KB
(77,312 bytes), 12/19/2005 8:36 AM)

[Sound Device]
Item Value

[Display]
Item Value
Name Standard VGA Graphics Adapter
PNP Device ID PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
2\4&2014205D&0&18F0
Adapter Type ATI ES1000, (Standard display
types) compatible
Adapter Description Standard VGA Graphics Adapter
Adapter RAM 32.00 MB (33,554,432 bytes)
Installed Drivers
vga.dll,framebuf.dll,vga256,vga64k

```

Driver Version 5.2.3790.1830  
 INF File display.inf (vga section)  
 Color Planes 1  
 Color Table Entries 4294967296  
 Resolution 1024 x 768 x 1 hertz  
 Bits/Pixel 32  
 Memory Address 0xD8000000-0xDFFFFFFF  
 I/O Port 0x00003000-0x000030FF  
 Memory Address 0xF7FF0000-0xF7FFFFFF  
 I/O Port 0x000003B0-0x000003BB  
 I/O Port 0x000003C0-0x000003DF  
 Memory Address 0xA0000-0xBFFFF  
 Driver c:\windows\system32\drivers\vgapnp.sys  
 (5.2.3790.1830 (srv03\_spl\_rtm.050324-1447), 33.00 KB  
 (33,792 bytes), 6/21/2007 5:07 AM)

[Infrared]

Item Value

[Input]

[Keyboard]

Item	Value
Description	USB Human Interface Device
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00
00	
Number of Function Keys	12
Driver	c:\windows\system32\drivers\hidusb.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 18.50 KB (18,944 bytes), 12/19/2005 8:37 AM)
Description	Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard	
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&2AA4AD3D&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1
Driver	c:\windows\system32\drivers\i8042prt.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 91.00 KB (93,184 bytes), 12/19/2005 8:37 AM)

[Pointing Device]

Item	Value
Hardware Type	USB Human Interface Device
Number of Buttons	5
Status	OK
PNP Device ID	USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00
01	
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation

Driver c:\windows\system32\drivers\hidusb.sys  
 (5.2.3790.1830 (srv03\_spl\_rtm.050324-1447), 18.50 KB  
 (18,944 bytes), 12/19/2005 8:37 AM)

Hardware Type PS/2 Compatible Mouse  
 Number of Buttons 5  
 Status OK  
 PNP Device ID ACPI\PNP0F13\4&2AA4AD3D&0  
 Power Management Supported No  
 Double Click Threshold 6  
 Handedness Right Handed Operation  
 IRQ Channel IRQ 12  
 Driver c:\windows\system32\drivers\i8042prt.sys  
 (5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710), 91.00 KB  
 (93,184 bytes), 12/19/2005 8:37 AM)

[Modem]

Item Value

[Network]

[Adapter]

Item	Value
Name	[00000001] RAS Async Adapter
Adapter Type	Not Available
Product Type	RAS Async Adapter
Installed Yes	
PNP Device ID	Not Available
Last Reset	11/6/2007 11:03 AM
Index	1
Service Name	AsyncMac
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000002] WAN Miniport (L2TP)
Adapter Type	Not Available
Product Type	WAN Miniport (L2TP)
Installed Yes	
PNP Device ID	ROOT\MS_L2TPMINIPORT\0000
Last Reset	11/6/2007 11:03 AM
Index	2
Service Name	Rasl2tp
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\rasl2tp.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 132.00 KB (135,168 bytes), 12/19/2005 8:38 AM)

Name	[00000003] WAN Miniport (PPTP)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPTP)
Installed Yes	
PNP Device ID	ROOT\MS_PPTPMINIPORT\0000
Last Reset	11/6/2007 11:03 AM
Index	3
Service Name	PptpMiniport
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	50:50:54:50:30:30
Driver	c:\windows\system32\drivers\raspptp.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 117.50 KB (120,320 bytes), 12/19/2005 8:38 AM)

Name	[00000004] WAN Miniport (PPPOE)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPPOE)
Installed Yes	
PNP Device ID	ROOT\MS_PPPOEMINIPORT\0000
Last Reset	11/6/2007 11:03 AM
Index	4
Service Name	Rasppoe
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	33:50:6F:45:30:30
Driver	c:\windows\system32\drivers\rasppoe.sys (5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 67.50 KB (69,120 bytes), 12/19/2005 8:38 AM)

Name	[00000005] Direct Parallel
Adapter Type	Not Available
Product Type	Direct Parallel
Installed Yes	
PNP Device ID	ROOT\MS_PTMINIPORT\0000
Last Reset	11/6/2007 11:03 AM
Index	5
Service Name	Raspti
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\raspti.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 30.50 KB (31,232 bytes), 12/19/2005 8:38 AM)

Name	[00000006] WAN Miniport (IP)
Adapter Type	Not Available

```

Product Type      WAN Miniport (IP)
Installed Yes
PNP Device ID    ROOT\MS_NDISWANIP\0000
Last Reset      11/6/2007 11:03 AM
Index           6
Service Name     NdisWan
IP Address      Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled     No
DHCP Server     Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address     Not Available
Driver          c:\windows\system32\drivers\ndiswan.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 157.50 KB
(161,280 bytes), 12/19/2005 8:37 AM)

Name [00000007] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type    Ethernet 802.3
Product Type    HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID   B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&154EFE07&0&20050500
Last Reset     11/6/2007 11:03 AM
Index         7
Service Name   12nd
IP Address     130.170.206.44, 130.171.206.44

IP Subnet 255.255.0.0, 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled     No
DHCP Server     Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address     00:17:A4:F5:55:D4
Driver          c:\windows\system32\drivers\bxnd52a.sys
(3.4.10.0 built by: WinDDK, 62.50 KB (64,000 bytes),
6/21/2007 11:14 AM)

Name [00000008] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type    Ethernet 802.3
Product Type    HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID   B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&183F41DD&0&20050300
Last Reset     11/6/2007 11:03 AM
Index         8
Service Name   12nd
IP Address     130.168.206.44, 130.169.206.44

IP Subnet 255.255.0.0, 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled     No
DHCP Server     Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available

```

```

MAC Address      00:17:A4:F5:55:D2
Driver          c:\windows\system32\drivers\bxnd52a.sys
(3.4.10.0 built by: WinDDK, 62.50 KB (64,000 bytes),
6/21/2007 11:14 AM)

[Protocol]

Item      Value
Name      MSAFD Tcpip [TCP/IP]
Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

Name      MSAFD Tcpip [UDP/IP]
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption No
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

Name      RSVP UDP Service Provider
Connectionless Service Yes
Guarantees Delivery No
Guarantees Sequencing No
Maximum Address Size 16 bytes
Maximum Message Size 63.93 KB (65,467 bytes)

Message Oriented Yes
Minimum Address Size 16 bytes
Pseudo Stream Oriented No
Supports Broadcasting Yes
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data No
Supports Graceful Closing No
Supports Guaranteed Bandwidth No
Supports Multicasting Yes

```

```

Name      RSVP TCP Service Provider
Connectionless Service No
Guarantees Delivery Yes
Guarantees Sequencing Yes
Maximum Address Size 16 bytes
Maximum Message Size 0 bytes
Message Oriented No
Minimum Address Size 16 bytes
Pseudo Stream Oriented
Supports Broadcasting No
Supports Connect Data No
Supports Disconnect Data No
Supports Encryption Yes
Supports Expedited Data Yes
Supports Graceful Closing Yes
Supports Guaranteed Bandwidth No
Supports Multicasting No

[WinSock]

Item      Value
File      c:\windows\system32\wsock32.dll
Size      24.50 KB (25,088 bytes)
Version   5.2.3790.1830 (srv03_sp1_rtm.050324-1447)

[Ports]

[Serial]

Item      Value
Name      Communications Port (COM1)
Status    OK
PNP Device ID ACPI\PNP0501\0
Maximum Input Buffer Size 0
Maximum Output Buffer Size No
Settable Baud Rate Yes
Settable Data Bits Yes
Settable Flow Control Yes
Settable Parity Yes
Settable Parity Check Yes
Settable Stop Bits Yes
Settable RLSD Yes
Supports RLSD Yes
Supports 16 Bit Mode No
Supports Special Characters No
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity    None
Busy      No
Abort Read/Write on Error No
Binary Mode Enabled Yes
Continue Xmit on XOFF No
CTS Outflow Control No
Discard NULL Bytes No
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0

```

```

Error Replace Character      0
Error Replacement Enabled   No
Event Character             0
Parity Check Enabled        No
RTS Flow Control Type      Enable
XOff Character             19
XOffXmit Threshold        512
XOn Character              17
XOnXmit Threshold         2048
XOnXOff InFlow Control     0
XOnXOff OutFlow Control    0
IRQ Channel                IRQ 4
I/O Port                   0x000003F8-0x000003FF
Driver                     c:\windows\system32\drivers\serial.sys
(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 118.50 KB
(121,344 bytes), 12/19/2005 8:38 AM)

```

[Parallel]

```
Item      Value
```

[Storage]

[Drives]

```

Item      Value
Drive C:
Description      Local Fixed Disk
Compressed        No
File System       NTFS
Size              33.88 GB (36,381,306,880 bytes)
Free Space        18.35 GB (19,703,853,056 bytes)

```

```

Volume Name
Volume Serial Number      A04CF1C5

```

```

Drive D:
Description      CD-ROM Disc

```

```

Drive F:
Description      Local Fixed Disk
Compressed        Not Available
File System       Not Available
Size              Not Available
Free Space        Not Available
Volume Name       Not Available
Volume Serial Number      Not Available

```

```

Drive T:
Description      Network Connection
Provider Name     \\depot\mnt

```

```

Drive U:
Description      Local Fixed Disk
Compressed        No
File System       NTFS
Size              761.60 GB (817,765,527,552 bytes)
Free Space        479.75 GB (515,127,197,696 bytes)

```

```

Volume Name      TpcBack1
Volume Serial Number      E8683A1D

```

```

Drive V:
Description      Local Fixed Disk
Compressed        No
File System       NTFS
Size              761.60 GB (817,765,527,552 bytes)
Free Space        479.75 GB (515,127,263,232 bytes)

```

```

Volume Name      TpcBack2
Volume Serial Number      547F4E14

```

```

Drive W:
Description      Local Fixed Disk
Compressed        No
File System       NTFS
Size              761.60 GB (817,765,527,552 bytes)
Free Space        479.75 GB (515,127,263,232 bytes)

```

```

Volume Name      TpcBack3
Volume Serial Number      D4BF3B22

```

```

Drive X:
Description      Local Fixed Disk
Compressed        No
File System       NTFS
Size              761.60 GB (817,765,527,552 bytes)
Free Space        479.75 GB (515,127,263,232 bytes)

```

```

Volume Name      TpcBack4
Volume Serial Number      5853EEE6

```

```

Drive Y:
Description      Local Fixed Disk
Compressed        No
File System       NTFS
Size              761.60 GB (817,765,527,552 bytes)
Free Space        479.75 GB (515,127,263,232 bytes)

```

```

Volume Name      TpcBack5
Volume Serial Number      302B4349

```

```

Drive Z:
Description      Local Fixed Disk
Compressed        No
File System       NTFS
Size              761.60 GB (817,765,527,552 bytes)
Free Space        477.44 GB (512,649,318,400 bytes)

```

```

Volume Name      TpcBack6
Volume Serial Number      843A3CDE

```

[Disks]

```

Item      Value
Description      \\.\PHYSICALDRIVE47
Manufacturer     Not Available
Model            Not Available
Bytes/Sector     512
Media Loaded     Yes
Media Type       Fixed hard disk
Partitions       1
SCSI Bus         Not Available
SCSI Logical Unit      Not Available

```

```

SCSI Port Not Available
SCSI Target ID   Not Available
Sectors/Track   63
Size             45.89 GB (49,277,652,480 bytes)
Total Cylinders  5,991
Total Sectors    96,245,415
Total Tracks     1,527,705
Tracks/Cylinder  255
Partition Disk #47, Partition #0
Partition Size   45.89 GB (49,277,620,224 bytes)

```

```
Partition Starting Offset      32,256 bytes
```

```

Description      \\.\PHYSICALDRIVE48
Manufacturer     Not Available
Model            Not Available
Bytes/Sector     512
Media Loaded     Yes
Media Type       Fixed hard disk
Partitions       1
SCSI Bus         Not Available
SCSI Logical Unit      Not Available
SCSI Port Not Available
SCSI Target ID   Not Available
Sectors/Track   63
Size             63.67 GB (68,360,302,080 bytes)
Total Cylinders  8,311
Total Sectors    133,516,215
Total Tracks     2,119,305
Tracks/Cylinder  255
Partition Disk #48, Partition #0
Partition Size   63.67 GB (68,360,269,824 bytes)

```

```
Partition Starting Offset      32,256 bytes
```

```

Description      \\.\PHYSICALDRIVE49
Manufacturer     Not Available
Model            Not Available
Bytes/Sector     512
Media Loaded     Yes
Media Type       Fixed hard disk
Partitions       1
SCSI Bus         Not Available
SCSI Logical Unit      Not Available
SCSI Port Not Available
SCSI Target ID   Not Available
Sectors/Track   63
Size             54.20 GB (58,193,856,000 bytes)
Total Cylinders  7,075
Total Sectors    113,659,875
Total Tracks     1,804,125
Tracks/Cylinder  255
Partition Disk #49, Partition #0
Partition Size   54.19 GB (58,185,598,464 bytes)

```

```
Partition Starting Offset      32,256 bytes
```

```

Description      \\.\PHYSICALDRIVE50
Manufacturer     Not Available
Model            Not Available
Bytes/Sector     512
Media Loaded     Yes
Media Type       Fixed hard disk

```

Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 7.37 GB (7,912,719,360 bytes)  
 Total Cylinders 962  
 Total Sectors 15,454,530  
 Total Tracks 245,310  
 Tracks/Cylinder 255  
 Partition Disk #50, Partition #0  
 Partition Size 7.37 GB (7,912,687,104 bytes)  
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE51  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 45.89 GB (49,277,652,480 bytes)  
 Total Cylinders 5,991  
 Total Sectors 96,245,415  
 Total Tracks 1,527,705  
 Tracks/Cylinder 255  
 Partition Disk #51, Partition #0  
 Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE52  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 63.67 GB (68,360,302,080 bytes)  
 Total Cylinders 8,311  
 Total Sectors 133,516,215  
 Total Tracks 2,119,305  
 Tracks/Cylinder 255  
 Partition Disk #52, Partition #0  
 Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE53  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512

Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 54.20 GB (58,193,856,000 bytes)  
 Total Cylinders 7,075  
 Total Sectors 113,659,875  
 Total Tracks 1,804,125  
 Tracks/Cylinder 255  
 Partition Disk #53, Partition #0  
 Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE54  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 7.37 GB (7,912,719,360 bytes)  
 Total Cylinders 962  
 Total Sectors 15,454,530  
 Total Tracks 245,310  
 Tracks/Cylinder 255  
 Partition Disk #54, Partition #0  
 Partition Size 7.37 GB (7,912,687,104 bytes)  
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE31  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 45.89 GB (49,277,652,480 bytes)  
 Total Cylinders 5,991  
 Total Sectors 96,245,415  
 Total Tracks 1,527,705  
 Tracks/Cylinder 255  
 Partition Disk #31, Partition #0  
 Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE32  
 Manufacturer Not Available

Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 63.67 GB (68,360,302,080 bytes)  
 Total Cylinders 8,311  
 Total Sectors 133,516,215  
 Total Tracks 2,119,305  
 Tracks/Cylinder 255  
 Partition Disk #32, Partition #0  
 Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE33  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 54.20 GB (58,193,856,000 bytes)  
 Total Cylinders 7,075  
 Total Sectors 113,659,875  
 Total Tracks 1,804,125  
 Tracks/Cylinder 255  
 Partition Disk #33, Partition #0  
 Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE34  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 7.37 GB (7,912,719,360 bytes)  
 Total Cylinders 962  
 Total Sectors 15,454,530  
 Total Tracks 245,310  
 Tracks/Cylinder 255  
 Partition Disk #34, Partition #0  
 Partition Size 7.37 GB (7,912,687,104 bytes)  
 Partition Starting Offset 32,256 bytes



Description \\.\PHYSICALDRIVE35  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 45.89 GB (49,277,652,480 bytes)  
 Total Cylinders 5,991  
 Total Sectors 96,245,415  
 Total Tracks 1,527,705  
 Tracks/Cylinder 255  
 Partition Disk #35, Partition #0  
 Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE36  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 63.67 GB (68,360,302,080 bytes)  
 Total Cylinders 8,311  
 Total Sectors 133,516,215  
 Total Tracks 2,119,305  
 Tracks/Cylinder 255  
 Partition Disk #36, Partition #0  
 Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE37  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 54.20 GB (58,193,856,000 bytes)  
 Total Cylinders 7,075  
 Total Sectors 113,659,875  
 Total Tracks 1,804,125  
 Tracks/Cylinder 255  
 Partition Disk #37, Partition #0

Partition Size 54.19 GB (58,185,598,464 bytes)  
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE38  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 7.37 GB (7,912,719,360 bytes)  
 Total Cylinders 962  
 Total Sectors 15,454,530  
 Total Tracks 245,310  
 Tracks/Cylinder 255  
 Partition Disk #38, Partition #0  
 Partition Size 7.37 GB (7,912,687,104 bytes)  
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE30  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 956.68 GB (1,027,230,543,360 bytes)  
 Total Cylinders 124,887  
 Total Sectors 2,006,309,655  
 Total Tracks 31,846,185  
 Tracks/Cylinder 255  
 Partition Disk #30, Partition #0  
 Partition Size 956.68 GB (1,027,230,511,104 bytes)  
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE39  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 45.89 GB (49,277,652,480 bytes)  
 Total Cylinders 5,991  
 Total Sectors 96,245,415  
 Total Tracks 1,527,705

Tracks/Cylinder 255  
 Partition Disk #39, Partition #0  
 Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE40  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 63.67 GB (68,360,302,080 bytes)  
 Total Cylinders 8,311  
 Total Sectors 133,516,215  
 Total Tracks 2,119,305  
 Tracks/Cylinder 255  
 Partition Disk #40, Partition #0  
 Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE41  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 54.20 GB (58,193,856,000 bytes)  
 Total Cylinders 7,075  
 Total Sectors 113,659,875  
 Total Tracks 1,804,125  
 Tracks/Cylinder 255  
 Partition Disk #41, Partition #0  
 Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE42  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 7.37 GB (7,912,719,360 bytes)

Total Cylinders 962  
Total Sectors 15,454,530  
Total Tracks 245,310  
Tracks/Cylinder 255  
Partition Disk #42, Partition #0  
Partition Size 7.37 GB (7,912,687,104 bytes)  
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE43  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 45.89 GB (49,277,652,480 bytes)  
Total Cylinders 5,991  
Total Sectors 96,245,415  
Total Tracks 1,527,705  
Tracks/Cylinder 255  
Partition Disk #43, Partition #0  
Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE44  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 63.67 GB (68,360,302,080 bytes)  
Total Cylinders 8,311  
Total Sectors 133,516,215  
Total Tracks 2,119,305  
Tracks/Cylinder 255  
Partition Disk #44, Partition #0  
Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE45  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available

Sectors/Track 63  
Size 54.20 GB (58,193,856,000 bytes)  
Total Cylinders 7,075  
Total Sectors 113,659,875  
Total Tracks 1,804,125  
Tracks/Cylinder 255  
Partition Disk #45, Partition #0  
Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE46  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 7.37 GB (7,912,719,360 bytes)  
Total Cylinders 962  
Total Sectors 15,454,530  
Total Tracks 245,310  
Tracks/Cylinder 255  
Partition Disk #46, Partition #0  
Partition Size 7.37 GB (7,912,687,104 bytes)  
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE20  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 45.89 GB (49,277,652,480 bytes)  
Total Cylinders 5,991  
Total Sectors 96,245,415  
Total Tracks 1,527,705  
Tracks/Cylinder 255  
Partition Disk #20, Partition #0  
Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE21  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available

SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 63.67 GB (68,360,302,080 bytes)  
Total Cylinders 8,311  
Total Sectors 133,516,215  
Total Tracks 2,119,305  
Tracks/Cylinder 255  
Partition Disk #21, Partition #0  
Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE22  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 54.20 GB (58,193,856,000 bytes)  
Total Cylinders 7,075  
Total Sectors 113,659,875  
Total Tracks 1,804,125  
Tracks/Cylinder 255  
Partition Disk #22, Partition #0  
Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE23  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 7.37 GB (7,912,719,360 bytes)  
Total Cylinders 962  
Total Sectors 15,454,530  
Total Tracks 245,310  
Tracks/Cylinder 255  
Partition Disk #23, Partition #0  
Partition Size 7.37 GB (7,912,687,104 bytes)  
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE24  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1

SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 761.60 GB (817,765,562,880 bytes)  
 Total Cylinders 99,421  
 Total Sectors 1,597,198,365  
 Total Tracks 25,352,355  
 Tracks/Cylinder 255  
 Partition Disk #24, Partition #0  
 Partition Size 761.60 GB (817,765,530,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE25  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 45.89 GB (49,277,652,480 bytes)  
 Total Cylinders 5,991  
 Total Sectors 96,245,415  
 Total Tracks 1,527,705  
 Tracks/Cylinder 255  
 Partition Disk #25, Partition #0  
 Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE26  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 63.67 GB (68,360,302,080 bytes)  
 Total Cylinders 8,311  
 Total Sectors 133,516,215  
 Total Tracks 2,119,305  
 Tracks/Cylinder 255  
 Partition Disk #26, Partition #0  
 Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE27  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512

Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 54.20 GB (58,193,856,000 bytes)  
 Total Cylinders 7,075  
 Total Sectors 113,659,875  
 Total Tracks 1,804,125  
 Tracks/Cylinder 255  
 Partition Disk #27, Partition #0  
 Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE28  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 7.37 GB (7,912,719,360 bytes)  
 Total Cylinders 962  
 Total Sectors 15,454,530  
 Total Tracks 245,310  
 Tracks/Cylinder 255  
 Partition Disk #28, Partition #0  
 Partition Size 7.37 GB (7,912,687,104 bytes)  
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE29  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 761.60 GB (817,765,562,880 bytes)  
 Total Cylinders 99,421  
 Total Sectors 1,597,198,365  
 Total Tracks 25,352,355  
 Tracks/Cylinder 255  
 Partition Disk #29, Partition #0  
 Partition Size 761.60 GB (817,765,530,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE10  
 Manufacturer Not Available

Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 45.89 GB (49,277,652,480 bytes)  
 Total Cylinders 5,991  
 Total Sectors 96,245,415  
 Total Tracks 1,527,705  
 Tracks/Cylinder 255  
 Partition Disk #10, Partition #0  
 Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE11  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 63.67 GB (68,360,302,080 bytes)  
 Total Cylinders 8,311  
 Total Sectors 133,516,215  
 Total Tracks 2,119,305  
 Tracks/Cylinder 255  
 Partition Disk #11, Partition #0  
 Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE12  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 54.20 GB (58,193,856,000 bytes)  
 Total Cylinders 7,075  
 Total Sectors 113,659,875  
 Total Tracks 1,804,125  
 Tracks/Cylinder 255  
 Partition Disk #12, Partition #0  
 Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE13  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 7.37 GB (7,912,719,360 bytes)  
 Total Cylinders 962  
 Total Sectors 15,454,530  
 Total Tracks 245,310  
 Tracks/Cylinder 255  
 Partition Disk #13, Partition #0  
 Partition Size 7.37 GB (7,912,687,104 bytes)  
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE14  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 761.60 GB (817,765,562,880 bytes)  
 Total Cylinders 99,421  
 Total Sectors 1,597,198,365  
 Total Tracks 25,352,355  
 Tracks/Cylinder 255  
 Partition Disk #14, Partition #0  
 Partition Size 761.60 GB (817,765,530,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE15  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 45.89 GB (49,277,652,480 bytes)  
 Total Cylinders 5,991  
 Total Sectors 96,245,415  
 Total Tracks 1,527,705  
 Tracks/Cylinder 255  
 Partition Disk #15, Partition #0

Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE16  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 63.67 GB (68,360,302,080 bytes)  
 Total Cylinders 8,311  
 Total Sectors 133,516,215  
 Total Tracks 2,119,305  
 Tracks/Cylinder 255  
 Partition Disk #16, Partition #0  
 Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE17  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 54.20 GB (58,193,856,000 bytes)  
 Total Cylinders 7,075  
 Total Sectors 113,659,875  
 Total Tracks 1,804,125  
 Tracks/Cylinder 255  
 Partition Disk #17, Partition #0  
 Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE18  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 7.37 GB (7,912,719,360 bytes)  
 Total Cylinders 962  
 Total Sectors 15,454,530

Total Tracks 245,310  
 Tracks/Cylinder 255  
 Partition Disk #18, Partition #0  
 Partition Size 7.37 GB (7,912,687,104 bytes)  
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE19  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 761.60 GB (817,765,562,880 bytes)  
 Total Cylinders 99,421  
 Total Sectors 1,597,198,365  
 Total Tracks 25,352,355  
 Tracks/Cylinder 255  
 Partition Disk #19, Partition #0  
 Partition Size 761.60 GB (817,765,530,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE0  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 45.89 GB (49,277,652,480 bytes)  
 Total Cylinders 5,991  
 Total Sectors 96,245,415  
 Total Tracks 1,527,705  
 Tracks/Cylinder 255  
 Partition Disk #0, Partition #0  
 Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE1  
 Manufacturer Not Available  
 Model Not Available  
 Bytes/Sector 512  
 Media Loaded Yes  
 Media Type Fixed hard disk  
 Partitions 1  
 SCSI Bus Not Available  
 SCSI Logical Unit Not Available  
 SCSI Port Not Available  
 SCSI Target ID Not Available  
 Sectors/Track 63  
 Size 63.67 GB (68,360,302,080 bytes)

Total Cylinders 8,311  
Total Sectors 133,516,215  
Total Tracks 2,119,305  
Tracks/Cylinder 255  
Partition Disk #1, Partition #0  
Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE2  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 54.20 GB (58,193,856,000 bytes)  
Total Cylinders 7,075  
Total Sectors 113,659,875  
Total Tracks 1,804,125  
Tracks/Cylinder 255  
Partition Disk #2, Partition #0  
Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE3  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 7.37 GB (7,912,719,360 bytes)  
Total Cylinders 962  
Total Sectors 15,454,530  
Total Tracks 245,310  
Tracks/Cylinder 255  
Partition Disk #3, Partition #0  
Partition Size 7.37 GB (7,912,687,104 bytes)  
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE4  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available

Sectors/Track 63  
Size 761.60 GB (817,765,562,880 bytes)  
Total Cylinders 99,421  
Total Sectors 1,597,198,365  
Total Tracks 25,352,355  
Tracks/Cylinder 255  
Partition Disk #4, Partition #0  
Partition Size 761.60 GB (817,765,530,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE5  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 45.89 GB (49,277,652,480 bytes)  
Total Cylinders 5,991  
Total Sectors 96,245,415  
Total Tracks 1,527,705  
Tracks/Cylinder 255  
Partition Disk #5, Partition #0  
Partition Size 45.89 GB (49,277,620,224 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE6  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 63.67 GB (68,360,302,080 bytes)  
Total Cylinders 8,311  
Total Sectors 133,516,215  
Total Tracks 2,119,305  
Tracks/Cylinder 255  
Partition Disk #6, Partition #0  
Partition Size 63.67 GB (68,360,269,824 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE7  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available

SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 54.20 GB (58,193,856,000 bytes)  
Total Cylinders 7,075  
Total Sectors 113,659,875  
Total Tracks 1,804,125  
Tracks/Cylinder 255  
Partition Disk #7, Partition #0  
Partition Size 54.19 GB (58,185,598,464 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE8  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 7.37 GB (7,912,719,360 bytes)  
Total Cylinders 962  
Total Sectors 15,454,530  
Total Tracks 245,310  
Tracks/Cylinder 255  
Partition Disk #8, Partition #0  
Partition Size 7.37 GB (7,912,687,104 bytes)  
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE9  
Manufacturer Not Available  
Model Not Available  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk  
Partitions 1  
SCSI Bus Not Available  
SCSI Logical Unit Not Available  
SCSI Port Not Available  
SCSI Target ID Not Available  
Sectors/Track 63  
Size 761.60 GB (817,765,562,880 bytes)  
Total Cylinders 99,421  
Total Sectors 1,597,198,365  
Total Tracks 25,352,355  
Tracks/Cylinder 255  
Partition Disk #9, Partition #0  
Partition Size 761.60 GB (817,765,530,624 bytes)

Partition Starting Offset 32,256 bytes

Description Disk drive  
Manufacturer (Standard disk drives)  
Model HP LOGICAL VOLUME SCSI Disk Device  
Bytes/Sector 512  
Media Loaded Yes  
Media Type Fixed hard disk

```

Partitions      1
SCSI Bus       0
SCSI Logical Unit 0
SCSI Port      2
SCSI Target ID 4
Sectors/Track  32
Size           33.89 GB (36,385,505,280 bytes)
Total Cylinders 8,709
Total Sectors  71,065,440
Total Tracks   2,220,795
Tracks/Cylinder 255
Partition Disk #55, Partition #0
Partition Size 33.88 GB (36,381,310,976 bytes)

```

Partition Starting Offset 16,384 bytes

[SCSI]

```

Item Value
Name Smart Array P800 Controller (Non-Miniport)

```

```

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&356D7036&0&0000010
Memory Address 0xFD400000-0xFD4FFFFF
I/O Port 0x00005000-0x00007FFF
Memory Address 0xFD3F0000-0xFD3F0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 6/22/2007 2:38 PM)

```

```
Name Smart Array P800 Controller (Non-Miniport)
```

```

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&14CDF429&0&0008010
Memory Address 0xFD600000-0xFD6FFFFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0xFD5F0000-0xFD5F0FFF
IRQ Channel IRQ 17
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 6/22/2007 2:38 PM)

```

```

Name Smart Array P600 Controller
Manufacturer Hewlett-Packard Company
Status OK
PNP Device ID PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
0\5&19379C89&0&080310
Memory Address 0xFD7F0000-0xFD7F1FFF
I/O Port 0x00007000-0x00007FFF
Memory Address 0xFD780000-0xFD7BFFFF
IRQ Channel IRQ 27
Driver c:\windows\system32\drivers\hpciss2.sys
(6.6.0.64 Build 5 (x86-64) built by: buildsrv, 59.30
KB (60,728 bytes), 6/21/2007 11:15 AM)

```

```

Name Smart Array P800 Controller (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&EFC3E79&0&0018
Memory Address 0xFD100000-0xFD1FFFFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0xFD0F0000-0xFD0F0FFF
IRQ Channel IRQ 18
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 6/22/2007 2:38 PM)

```

```
Name Smart Array P800 Controller (Non-Miniport)
```

```

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&237315C2&0&0020
Memory Address 0xFD900000-0xFD9FFFFF
I/O Port 0x00008000-0x00008FFF
Memory Address 0xFD8F0000-0xFD8F0FFF
IRQ Channel IRQ 19
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 6/22/2007 2:38 PM)

```

```
Name Smart Array P800 Controller (Non-Miniport)
```

```

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&1AB8B18D&0&0028
Memory Address 0xFDB00000-0xFDBFFFFF
I/O Port 0x00009000-0x00009FFF
Memory Address 0xFDAF0000-0xFDAF0FFF
IRQ Channel IRQ 18
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 6/22/2007 2:38 PM)

```

```
Name Smart Array P800 Controller (Non-Miniport)
```

```

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&79C23&0&0030
Memory Address 0xFDD00000-0xFDDFFFFF
I/O Port 0x0000A000-0x0000AFFF
Memory Address 0xFDCE0000-0xFDCE0FFF
IRQ Channel IRQ 19
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 6/22/2007 2:38 PM)

```

```
Name Smart Array P800 Controller (Non-Miniport)
```

```
Manufacturer Hewlett-Packard
```

```

Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&8C20058&0&0038
Memory Address 0xFDF00000-0xFDFFFFFFFF
I/O Port 0x0000B000-0x0000BFFF
Memory Address 0xFDEF0000-0xFDEF0FFF
IRQ Channel IRQ 18
Driver c:\windows\system32\drivers\hpcqciiss.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 6/22/2007 2:38 PM)

```

[IDE]

```

Item Value
Name Standard Dual Channel PCI IDE Controller

```

```

Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&F9
I/O Port 0x00000500-0x0000050F
Driver c:\windows\system32\drivers\pciide.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 6.00 KB
(6,144 bytes), 12/19/2005 8:38 AM)

```

```

Name Primary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID PCI\IDE\IDECHANNEL\4&56E2F28&0&0
I/O Port 0x000001F0-0x000001F7
I/O Port 0x000003F6-0x000003F6
IRQ Channel IRQ 14
Driver c:\windows\system32\drivers\ataapi.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 146.50 KB
(150,016 bytes), 12/19/2005 8:36 AM)

```

```

Name Secondary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID PCI\IDE\IDECHANNEL\4&56E2F28&0&1
I/O Port 0x00000170-0x00000177
I/O Port 0x00000376-0x00000376
Driver c:\windows\system32\drivers\ataapi.sys
(5.2.3790.3959 (srv03_sp2_rtm.070216-1710), 146.50 KB
(150,016 bytes), 12/19/2005 8:36 AM)

```

[Printing]

```
Name Driver Port Name Server Name
```

[Problem Devices]

```

Device PNP Device ID Error Code
Base System Device
PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0

```

3\4&2014205D&0&20F0 The drivers for this device are not installed.  
 Base System Device  
 PCI\VEN\_0E11&DEV\_B204&SUBSYS\_3305103C&REV\_0  
 3\4&2014205D&0&22F0 The drivers for this device are not installed.  
 PCI Device  
 PCI\VEN\_103C&DEV\_3302&SUBSYS\_3305103C&REV\_0  
 0\4&2014205D&0&26F0 The drivers for this device are not installed.  
 Not Available ACPI\IPI001\0 The drivers for this device are not installed.

[USB]

Device PNP Device ID  
 Standard Universal PCI to USB Host Controller  
 PCI\VEN\_8086&DEV\_2688&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&E8  
 Standard Universal PCI to USB Host Controller  
 PCI\VEN\_8086&DEV\_2689&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&E9  
 Standard Universal PCI to USB Host Controller  
 PCI\VEN\_8086&DEV\_268A&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&EA  
 Standard Universal PCI to USB Host Controller  
 PCI\VEN\_8086&DEV\_268B&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&EB  
 Standard Enhanced PCI to USB Host Controller  
 PCI\VEN\_8086&DEV\_268C&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&EF  
 Standard Universal PCI to USB Host Controller  
 PCI\VEN\_103C&DEV\_3300&SUBSYS\_3305103C&REV\_0  
 0\4&2014205D&0&24F0

[Software Environment]

[System Drivers]

Name	Description	File	Type
	Started	Start Mode	State
	Status	Error Control	Accept Pause
	Accept Stop		
abiosdsk	Abiosdsk	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Ignore	No	No
acpi	Microsoft ACPI Driver		
	c:\windows\system32\drivers\acpi.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
acpiec	ACPIEC		
	c:\windows\system32\drivers\acpiec.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
adpu160m	adpu160m	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No

adpu320	adpu320	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
afd	AFD		
	c:\windows\system32\drivers\afd.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
aic78u2	aic78u2	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
aic78xx	aic78xx	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
aliide	AliIde	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
amdide	AmdIde	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
arc	arc	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
asynccmac	RAS Asynchronous Media Driver		
	c:\windows\system32\drivers\asynccmac.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
ataapi	Standard IDE/ESDI Hard Disk Controller		
	c:\windows\system32\drivers\ataapi.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
atdisk	Atdisk	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Ignore	No	No
ati2mtag	ati2mtag		
	c:\windows\system32\drivers\ati2mtag.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Ignore No No
atmarpc	ATM ARP Client Protocol		
	c:\windows\system32\drivers\atmarpc.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
audstub	Audio Stub Driver		
	c:\windows\system32\drivers\audstub.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
b06bdrv	HP Virtual Bus Device		
	c:\windows\system32\drivers\bxvbda.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
beep	Beep		
	c:\windows\system32\drivers\beep.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
cdac15ba	CdaC15BA		
	c:\windows\system32\drivers\cdac15ba.sys		

	Kernel Driver	Yes	Auto
	Running	OK	Normal No Yes
cdad10ba	CdaD10BA		
	c:\windows\system32\drivers\cdad10ba.sys		
	Kernel Driver	Yes	Auto
	Running	OK	Normal No Yes
cdfs	Cdfs		
	c:\windows\system32\drivers\cdfs.sys		
	File System Driver	Yes	Disabled
	Running	OK	Normal No Yes
cdrom	CD-ROM Driver		
	c:\windows\system32\drivers\cdrom.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
changer	Changer	Not Available	Kernel Driver
	No	System Stopped	OK
	Ignore	No	No
clusdisk	Cluster Disk Driver		
	c:\windows\system32\drivers\clusdisk.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
cmdide	CmdIde	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
cpqccissm	cpqccissm	Not Available	Kernel Driver
	No	Disabled Stopped	OK
	Normal	No	No
cpqteam	HP Network Configuration Utility		
	c:\windows\system32\drivers\cpqteam.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
crdisk	CRC Disk Filter Driver		
	c:\windows\system32\drivers\crdisk.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
dfsdriver	DfsDriver		
	c:\windows\system32\drivers\dfs.sys		
	File System Driver	Yes	Boot
	Running	OK	Normal No Yes
disk	Disk Driver		
	c:\windows\system32\drivers\disk.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
dmboot	dmboot		
	c:\windows\system32\drivers\dmboot.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
dmio	Logical Disk Manager Driver		
	c:\windows\system32\drivers\dmio.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes

dmload	dmload c:\windows\system32\drivers\dmload.sys Kernel Driver Yes Boot Running OK Normal No Yes
dpti2o	dpti2o Not Available Kernel Driver No Disabled Stopped OK Normal No No
elxstor	elxstor Not Available Kernel Driver No Disabled Stopped OK Normal No No
fastfat	Fastfat c:\windows\system32\drivers\fastfat.sys File System Driver No Disabled Stopped OK Normal No No
fdc	Fdc c:\windows\system32\drivers\fdc.sys Kernel Driver No System Stopped OK Ignore No No
fips	Fips c:\windows\system32\drivers\fips.sys Kernel Driver Yes System Running OK Normal No Yes
flpydisk	Flpydisk c:\windows\system32\drivers\flpydisk.sys Kernel Driver No System Stopped OK Ignore No No
fltmgr	FltMgr c:\windows\system32\drivers\fltmgr.sys File System Driver Yes Boot Running OK Normal No Yes
ftdisk	Volume Manager Driver c:\windows\system32\drivers\ftdisk.sys Kernel Driver Yes Boot Running OK Normal No Yes
gpc	Generic Packet Classifier c:\windows\system32\drivers\msgpc.sys Kernel Driver Yes Manual Running OK Normal No Yes
hidusb	Microsoft HID Class Driver c:\windows\system32\drivers\hidusb.sys Kernel Driver Yes Manual Running OK Ignore No Yes
hpciss2p	HpCISS2p c:\windows\system32\drivers\hpciss2p.sys Kernel Driver Yes Boot Running OK Normal No Yes
hpciss	hpciss c:\windows\system32\drivers\hpciss.sys Kernel Driver Yes Boot Running OK Normal No Yes
hpciss2	HpCISSs2 c:\windows\system32\drivers\hpciss2.sys

	Kernel Driver Yes Boot Running OK Normal No Yes
hpqcissb Driver	Smart Array Controllers Non-Miniport Bus c:\windows\system32\drivers\hpqcissb.sys Kernel Driver Yes Boot Running OK Normal No Yes
hpqcissd Driver	Smart Array Controllers Non-Miniport Disk c:\windows\system32\drivers\hpqcissd.sys Kernel Driver Yes Boot Running OK Normal No Yes
http	HTTP c:\windows\system32\drivers\http.sys Kernel Driver No Manual Stopped OK Normal No No
i2omgmt	i2omgmt Not Available Kernel Driver No System Stopped OK Normal No No
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver c:\windows\system32\drivers\i8042prt.sys Kernel Driver Yes System Running OK Normal No Yes
iirsp	iirsp Not Available Kernel Driver No Disabled Stopped OK Normal No No
imapi	CD-Burning Filter Driver c:\windows\system32\drivers\imapi.sys Kernel Driver No System Stopped OK Normal No No
intelide	IntelIde Not Available Kernel Driver No Disabled Stopped OK Normal No No
intelppm	Intel Processor Driver c:\windows\system32\drivers\intelppm.sys Kernel Driver Yes Manual Running OK Normal No Yes
ip6fw	IPv6 Windows Firewall Driver c:\windows\system32\drivers\ip6fw.sys Kernel Driver No Manual Stopped OK Normal No No
ipfilterdriver	IP Traffic Filter Driver c:\windows\system32\drivers\ipfltdrv.sys Kernel Driver No Manual Stopped OK Normal No No
ipinip	IP in IP Tunnel Driver c:\windows\system32\drivers\ipinip.sys Kernel Driver No Manual Stopped OK Normal No No
ipnat	IP Network Address Translator c:\windows\system32\drivers\ipnat.sys Kernel Driver No Manual Stopped OK Normal No No

ipsec	IPSEC driver c:\windows\system32\drivers\ipsec.sys Kernel Driver Yes System Running OK Normal No Yes
isapnp	PnP ISA/EISA Bus Driver c:\windows\system32\drivers\isapnp.sys Kernel Driver Yes Boot Running OK Critical No Yes
kbdclass	Keyboard Class Driver c:\windows\system32\drivers\kbdclass.sys Kernel Driver Yes System Running OK Normal No Yes
kbdhid	Keyboard HID Driver c:\windows\system32\drivers\kbdhid.sys Kernel Driver Yes System Running OK Ignore No Yes
ksecdd	KSecDD c:\windows\system32\drivers\ksecdd.sys Kernel Driver Yes Boot Running OK Normal No Yes
ksthunk	Kernel Streaming WOW64 Thunk Service c:\windows\system32\drivers\ksthunk.sys Kernel Driver Yes Manual Running OK Normal No Yes
l2nd Adapter	HP NC370 Multifunction Gigabit Server c:\windows\system32\drivers\bxnd52a.sys Kernel Driver Yes Manual Running OK Normal No Yes
lp6nds35	lp6nds35 Not Available Kernel Driver No Disabled Stopped OK Normal No No
mnmdd	mnmdd c:\windows\system32\drivers\mnmdd.sys Kernel Driver Yes System Running OK Ignore No Yes
modem	Modem c:\windows\system32\drivers\modem.sys Kernel Driver No Manual Stopped OK Ignore No No
mouclass	Mouse Class Driver c:\windows\system32\drivers\mouclass.sys Kernel Driver Yes System Running OK Normal No Yes
mouhid	Mouse HID Driver c:\windows\system32\drivers\mouhid.sys Kernel Driver Yes Manual Running OK Ignore No Yes
mountmgr	Mount Point Manager c:\windows\system32\drivers\mountmgr.sys Kernel Driver Yes Boot Running OK Normal No Yes



mraid35x	mraid35x	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Normal	No	No			
mrxdav	WebDav Client Redirector					
	c:\windows\system32\drivers\mrxdav.sys					
	File System Driver	No	Manual			
	Stopped	OK	Normal	No	No	
mrxsmb	MRXSMB					
	c:\windows\system32\drivers\mrxsmb.sys					
	File System Driver	Yes	System			
	Running	OK	Normal	No	Yes	
msfs	Msfs					
	c:\windows\system32\drivers\msfs.sys					
	File System Driver	Yes	System			
	Running	OK	Normal	No	Yes	
mssmbios	Microsoft System Management BIOS Driver					
	c:\windows\system32\drivers\mssmbios.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
mup	Mup					
	c:\windows\system32\drivers\mup.sys					
	File System Driver	Yes	Boot			
	Running	OK	Normal	No	Yes	
ndis	NDIS System Driver					
	c:\windows\system32\drivers\ndis.sys					
	Kernel Driver	Yes	Boot			
	Running	OK	Normal	No	Yes	
ndistapi	Remote Access NDIS TAPI Driver					
	c:\windows\system32\drivers\ndistapi.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
ndisuio	NDIS Usermode I/O Protocol					
	c:\windows\system32\drivers\ndisuio.sys					
	Kernel Driver	No	Manual			
	Stopped	OK	Normal	No	No	
ndiswan	Remote Access NDIS WAN Driver					
	c:\windows\system32\drivers\ndiswan.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
ndproxy	NDIS Proxy					
	c:\windows\system32\drivers\ndproxy.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
netbios	NetBIOS Interface					
	c:\windows\system32\drivers\netbios.sys					
	File System Driver	Yes	System			
	Running	OK	Normal	No	Yes	
netbt	NetBios over Tcpip					
	c:\windows\system32\drivers\netbt.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	

nfrd960	nfrd960	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Normal	No	No			
npfs	Npfs					
	c:\windows\system32\drivers\npfs.sys					
	File System Driver	Yes	System			
	Running	OK	Normal	No	Yes	
ntfs	Ntfs					
	c:\windows\system32\drivers\ntfs.sys					
	File System Driver	Yes	Disabled			
	Running	OK	Normal	No	Yes	
null	Null					
	c:\windows\system32\drivers\null.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
parport	Parport					
	c:\windows\system32\drivers\parport.sys					
	Kernel Driver	No	Manual			
	Stopped	OK	Ignore	No	No	
partmgr	Partition Manager					
	c:\windows\system32\drivers\partmgr.sys					
	Kernel Driver	Yes	Boot			
	Running	OK	Normal	No	Yes	
pci	PCI Bus Driver					
	c:\windows\system32\drivers\pci.sys					
	Kernel Driver	Yes	Boot			
	Running	OK	Critical	No	Yes	
pciide	PCIIde					
	c:\windows\system32\drivers\pciide.sys					
	Kernel Driver	Yes	Boot			
	Running	OK	Normal	No	Yes	
pcmcia	Pcmcia					
	c:\windows\system32\drivers\pcmcia.sys					
	Kernel Driver	No	Disabled			
	Stopped	OK	Normal	No	No	
pdcomp	PDCOMP	Not Available	Kernel Driver			
	No	Manual	Stopped	OK		
	Ignore	No	No			
pdframe	PDFRAME	Not Available	Kernel Driver			
	No	Manual	Stopped	OK		
	Ignore	No	No			
pdreli	PDRELI	Not Available	Kernel Driver			
	No	Manual	Stopped	OK		
	Ignore	No	No			
pdrframe	PDRFRAME	Not Available	Kernel Driver			
	No	Manual	Stopped	OK		
	Ignore	No	No			
pptpminiport	WAN Miniport (PPTP)					
	c:\windows\system32\drivers\raspttp.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
ptilink	Direct Parallel Link Driver					
	c:\windows\system32\drivers\ptilink.sys					
	Kernel Driver	Yes	Manual			

	Running	OK	Normal	No	Yes	
ql2300	ql2300	Not Available	Kernel Driver			
	No	Disabled	Stopped	OK		
	Normal	No	No			
rasacd	Remote Access Auto Connection Driver					
	c:\windows\system32\drivers\rasacd.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
rasl2tp	WAN Miniport (L2TP)					
	c:\windows\system32\drivers\rasl2tp.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
raspppoe	Remote Access PPPOE Driver					
	c:\windows\system32\drivers\raspppoe.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
raspti	Direct Parallel					
	c:\windows\system32\drivers\raspti.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
rdbss	Rdbss					
	c:\windows\system32\drivers\rdbss.sys					
	File System Driver	Yes	System			
	Running	OK	Normal	No	Yes	
rdpcdd	RDPCCDD					
	c:\windows\system32\drivers\rdpcdd.sys					
	Kernel Driver	Yes	System			
	Running	OK	Ignore	No	Yes	
rdpdr	Terminal Server Device Redirector Driver					
	c:\windows\system32\drivers\rdpdr.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
rdpwd	RDPWD					
	c:\windows\system32\drivers\rdpwd.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Ignore	No	Yes	
redbook	Digital CD Audio Playback Filter Driver					
	c:\windows\system32\drivers\redbook.sys					
	Kernel Driver	Yes	System			
	Running	OK	Normal	No	Yes	
secdrv	Security Driver					
	c:\windows\system32\drivers\secdrv.sys					
	Kernel Driver	Yes	Auto			
	Running	OK	Normal	No	Yes	
serenum	Serenum Filter Driver					
	c:\windows\system32\drivers\serenum.sys					
	Kernel Driver	Yes	Manual			
	Running	OK	Normal	No	Yes	
serial	Serial port driver					
	c:\windows\system32\drivers\serial.sys					
	Kernel Driver	Yes	System			

	Running	OK	Ignore	No	Yes
sfloppy	High-Capacity Floppy Disk Drive				
	c:\windows\system32\drivers\sfloppy.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
simbad	Simbad	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
srv	Srv				
	c:\windows\system32\drivers\srv.sys				
	File System Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
swenum	Software Bus Driver				
	c:\windows\system32\drivers\swenum.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
symc8xx	symc8xx	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
symmpi	symmpi	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
sym_hi	sym_hi	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
sym_u3	sym_u3	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
tcpip	TCP/IP Protocol Driver				
	c:\windows\system32\drivers\tcpip.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
tdpipe	TDPIPE				
	c:\windows\system32\drivers\tdpipe.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Ignore	No	No
tdtcp	TDTCP				
	c:\windows\system32\drivers\tdtcp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
termdd	Terminal Device Driver				
	c:\windows\system32\drivers\termdd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
toside	TosIde	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
udfs	Udfs				
	c:\windows\system32\drivers\udfs.sys				
	File System Driver	No	Disabled		
	Stopped	OK	Normal	No	No
ultra	ultra	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		

update	Microcode Update Driver				
	c:\windows\system32\drivers\update.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbccgp	Microsoft USB Generic Parent Driver				
	c:\windows\system32\drivers\usbccgp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbhcci	Microsoft USB 2.0 Enhanced Host Controller				
	Miniport Driver				
	c:\windows\system32\drivers\usbhcci.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbhub	USB2 Enabled Hub				
	c:\windows\system32\drivers\usbhub.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbstor	USB Mass Storage Driver				
	c:\windows\system32\drivers\usbstor.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
usbuhci	Microsoft USB Universal Host Controller				
	Miniport Driver				
	c:\windows\system32\drivers\usbuhci.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
vga	vga				
	c:\windows\system32\drivers\vgapnp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
vgasave	VGA Display Controller.				
	c:\windows\system32\drivers\vga.sys				
	Kernel Driver	No	System		
	Stopped	OK	Ignore	No	No
viaide	ViaIde	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
volsnap	Storage volumes				
	c:\windows\system32\drivers\volsnap.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
wanarp	Remote Access IP ARP Driver				
	c:\windows\system32\drivers\wanarp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
wdf01000	Wdf01000				
	c:\windows\system32\drivers\wdf01000.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
wdica	WDICA	Not Available		Kernel Driver	
	No	Manual	Stopped	OK	
	Ignore	No	No		

wlbs	Network Load Balancing			
	c:\windows\system32\drivers\wlbs.sys			
	Kernel Driver	No	Manual	
	Stopped	OK	Normal	No
				No
[Signed Drivers]				
Device Name	Signed	Device Class		
	Driver Version	Driver Date		
	Manufacturer	INF Name	Driver Name	
	Device ID			
Microsoft System Management BIOS Driver	Yes			
SYSTEM	5.2.3790.1830	10/1/2002		
(Standard system devices)		machine.inf		
Not Available		ROOT\SYSTEM\0002		
Microcode Update Device	Yes	SYSTEM		
5.2.3790.1830	10/1/2002	(Standard		
system devices)	machine.inf	Not Available		
ROOT\SYSTEM\0001				
Plug and Play Software Device Enumerator	Yes			
SYSTEM	5.2.3790.1830	10/1/2002		
(Standard system devices)		machine.inf		
Not Available		ROOT\SYSTEM\0000		
Terminal Server Mouse Driver	Yes	SYSTEM		
5.2.3790.1830	10/1/2002	(Standard		
system devices)	machine.inf	Not Available		
ROOT\RDP_MOUSE\0000				
Terminal Server Keyboard Driver	Yes			
SYSTEM	5.2.3790.1830	10/1/2002		
(Standard system devices)		machine.inf		
Not Available		ROOT\RDP_KBD\0000		
Terminal Server Device Redirector	Yes			
SYSTEM	5.2.3790.1830	10/1/2002		
(Standard system devices)		machine.inf		
Not Available		ROOT\RDPDR\0000		
Direct Parallel	Yes	NET	5.2.3790.1830	
10/1/2002	Microsoft	netrasa.inf		
Available	ROOT\MS_PTMINIPORT\0000			
WAN Miniport (PPTP)	Yes	NET	5.2.3790.1830	
10/1/2002	Microsoft	netrasa.inf		
Available	ROOT\MS_PPTPMINIPORT\0000			
WAN Miniport (PPPOE)	Yes	NET		
5.2.3790.1830	10/1/2002	Microsoft		
netrasa.inf		Not Available		
ROOT\MS_PPPOEMINIPORT\0000				
WAN Miniport (IP)	Yes	NET	5.2.3790.1830	
10/1/2002	Microsoft	netrasa.inf		
Available	ROOT\MS_NDISWANIP\0000			
WAN Miniport (L2TP)	Yes	NET	5.2.3790.1830	
10/1/2002	Microsoft	netrasa.inf		
Available	ROOT\MS_L2TPMINIPORT\0000			
Video Codecs	Yes	MEDIA	5.2.3790.1830	
10/1/2002	(Standard system devices)			
wave.inf	Not Available			
ROOT\MEDIA\MS_MMVID				
Legacy Video Capture Devices	Yes	MEDIA		
5.2.3790.1830	10/1/2002	(Standard		
system devices)	wave.inf	Not Available		
ROOT\MEDIA\MS_MMVCD				
Media Control Devices	Yes	MEDIA		
5.2.3790.1830	10/1/2002	(Standard		

system devices)	wave.inf	Not Available	
	ROOT\MEDIA\MS_MMMCI		
Legacy Audio Drivers	Yes	MEDIA	
	5.2.3790.1830	10/1/2002 (Standard	
system devices)	wave.inf	Not Available	
	ROOT\MEDIA\MS_MMDRV		
Audio Codecs	Yes	MEDIA	5.2.3790.1830
	10/1/2002 (Standard system devices)		
	wave.inf	Not Available	
	ROOT\MEDIA\MS_MMCM		
Remote Access IP ARP Driver	Not Available		
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_WANARP\0000		
volsnap	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_VOLSNAP\0000		
TDTCP	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_TDTCP\0000	
TCP/IP Protocol Driver	Not Available		
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_TCPIP\0000		
Security Driver	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_SECDRV\0000		
RDPWD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_RDPWD\0000	
RDPDCCD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_RDPDCCD\0000	
Remote Access Auto Connection Driver	Not Available		
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_RASACD\0000		
Partition Manager	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_PARTMGR\0000		
Null	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_NULL\0000	
NetBios over Tcpip	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_NETBT\0000		
NDProxy	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_NDPROXY\0000		
NDIS Usermode I/O Protocol	Not Available		
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISUIO\0000		

Remote Access NDIS TAPI Driver		Not Available	
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISTAPI\0000		
NDIS System Driver	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_NDIS\0000		
mountmgr	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_MOUNTMGR\0000		
mnmdd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_MNMDD\0000	
ksecdd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_KSECDD\0000	
IPSEC driver	Not Available	LEGACYDRIVER	
	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_IPSEC\0000		
IP Network Address Translator	Not Available		
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_IPNAT\0000		
hpcisss	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_HPCISSS\0000		
HpCISS2p	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_HPCISS2P\0000	
Generic Packet Classifier	Not Available		
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_GPC\0000		
Fips	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_FIPS\0000	
dmload	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_DMLOAD\0000	
dmboot	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_DMBOOT\0000	
CRC Disk Filter Driver	Not Available		
	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_CRCDISK\0000		
CdaD10BA	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not
	ROOT\LEGACY_CDAD10BA\0000		
CdaC15BA	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not

Available	Not Available		
	ROOT\LEGACY_CDAC15BA\0000		
Beep	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_BEEP\0000	
AFD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_AFD\0000	
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREF04AF0		
	4A0FFSET4000LENGTH8787EC000		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198		
	420FFSET7E00LENGTH1D7A20600		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198		
	430FFSET7E00LENGTHD8C21C600		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198		
	440FFSET7E00LENGTHFEA96F000		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198		
	450FFSET7E00LENGTHB792CD000		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198		
	460FFSET7E00LENGTH1D7A20600		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198		
	470FFSET7E00LENGTHD8C21C600		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198		
	480FFSET7E00LENGTHFEA96F000		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198		
	490FFSET7E00LENGTHB792CD000		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			
	STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198		
	4A0FFSET7E00LENGTH1D7A20600		
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available			



Generic volume Yes VOLUME 5.2.3790.1830  
 10/1/2002 Microsoft volume.inf Not Available  
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198  
 B10FFSET7E00LENGTHD8C21C600  
 Generic volume Yes VOLUME 5.2.3790.1830  
 10/1/2002 Microsoft volume.inf Not Available  
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198  
 B20FFSET7E00LENGTHFEA96F000  
 Generic volume Yes VOLUME 5.2.3790.1830  
 10/1/2002 Microsoft volume.inf Not Available  
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198  
 B30FFSET7E00LENGTHB792CD000  
 Generic volume Yes VOLUME 5.2.3790.1830  
 10/1/2002 Microsoft volume.inf Not Available  
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198  
 B40FFSET7E00LENGTHBE669FBC00  
 Generic volume Yes VOLUME 5.2.3790.1830  
 10/1/2002 Microsoft volume.inf Not Available  
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198  
 B50FFSET7E00LENGTHLD7A20600  
 Generic volume Yes VOLUME 5.2.3790.1830  
 10/1/2002 Microsoft volume.inf Not Available  
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198  
 B60FFSET7E00LENGTHD8C21C600  
 Generic volume Yes VOLUME 5.2.3790.1830  
 10/1/2002 Microsoft volume.inf Not Available  
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198  
 B70FFSET7E00LENGTHFEA96F000  
 Generic volume Yes VOLUME 5.2.3790.1830  
 10/1/2002 Microsoft volume.inf Not Available  
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREA41198  
 B80FFSET7E00LENGTHB792CD000  
 Volume Manager Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices)  
 machine.inf Not Available  
 ROOT\FTDISK\0000  
 Logical Disk Manager Yes SYSTEM  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) machine.inf Not Available  
 ROOT\DMIO\0000  
 ACPI Fixed Feature Button Yes SYSTEM  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) machine.inf Not Available  
 ACPI\FIXEDBUTTON\2&DABA3FF&0  
 ACPI Thermal Zone Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices)  
 machine.inf Not Available  
 ACPI\THERMALZONE\THM0  
 Secondary IDE Channel Yes HDC  
 5.2.3790.1830 10/1/2002 (Standard IDE  
 ATA/ATAPI controllers) mshdc.inf Not Available  
 PCIIDE\IDECHANNEL\4&56E2F28&0&1  
 CD-ROM Drive Yes CDROM 5.2.3790.1830  
 10/1/2002 (Standard CD-ROM drives)  
 cdrom.inf Not Available IDE\CDROMHL-

DT-ST\_CD-ROM\_GCR-  
 8486B\_\_\_\_\_2.00\_\_\_\_\5&5FD9AC6&0&0.0.0  
 Primary IDE Channel Yes HDC 5.2.3790.1830  
 10/1/2002 (Standard IDE ATA/ATAPI  
 controllers) mshdc.inf Not Available  
 PCIIDE\IDECHANNEL\4&56E2F28&0&0  
 Standard Dual Channel PCI IDE Controller Yes  
 HDC 5.2.3790.1830 10/1/2002  
 (Standard IDE ATA/ATAPI controllers)  
 mshdc.inf Not Available  
 PCI\VEN\_8086&DEV\_269E&SUBSYS\_31FE103C&REV\_0  
 9\3&61AAA01&0&F9  
 Communications Port Yes PORTS 5.2.3790.1830  
 10/1/2002 (Standard port types)  
 msports.inf Not Available  
 ACPI\PNP0501\0  
 Extended IO Bus Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices)  
 machine.inf Not Available  
 ACPI\PNP0A06\4&2AA4AD3D&0  
 PS/2 Compatible Mouse Yes MOUSE  
 5.2.3790.1830 10/1/2002 Microsoft  
 msmouse.inf Not Available  
 ACPI\PNP0F13\4&2AA4AD3D&0  
 Standard 101/102-Key or Microsoft Natural PS/2  
 Keyboard Yes KEYBOARD 5.2.3790.1830  
 10/1/2002 (Standard keyboards)  
 keyboard.inf Not Available  
 ACPI\PNP0303\4&2AA4AD3D&0  
 System speaker Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices)  
 machine.inf Not Available  
 ACPI\PNP0800\4&2AA4AD3D&0  
 Direct memory access controller Yes  
 SYSTEM 5.2.3790.1830 10/1/2002  
 (Standard system devices) machine.inf  
 Not Available  
 ACPI\PNP0200\4&2AA4AD3D&0  
 High precision event timer Yes SYSTEM  
 5.2.3790.3959 10/1/2002 (Standard  
 system devices) machine.inf Not Available  
 ACPI\PNP0103\0  
 System timer Yes SYSTEM 5.2.3790.1830  
 10/1/2002 (Standard system devices)  
 machine.inf Not Available  
 ACPI\PNP0100\4&2AA4AD3D&0  
 Not Available Not Available Not Available  
 Not Available Not Available Not Available Not  
 Available Not Available Not Available  
 ACPI\IPI0001\0  
 Motherboard resources Yes SYSTEM  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) machine.inf Not Available  
 ACPI\PNP0C02\0  
 PCI standard ISA bridge Yes SYSTEM  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) machine.inf Not Available  
 PCI\VEN\_8086&DEV\_2670&SUBSYS\_00000000&REV\_0  
 9\3&61AAA01&0&F8  
 PCI Device Not Available UNKNOWN Not  
 Available Not Available Not Available Not  
 Available Not Available

PCI\VEN\_103C&DEV\_3302&SUBSYS\_3305103C&REV\_0  
 0\4&2014205D&0&26F0  
 Generic USB Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Generic USB Hub) usb.inf Not  
 Available USB\VID\_03F0&PID\_1327\6&18FFBC52&0&2  
 HID-compliant mouse Yes MOUSE 5.2.3790.1830  
 10/1/2002 Microsoft msmouse.inf Not  
 Available  
 HID\VID\_03F0&PID\_1027&MI\_01\8&25B103E6&0&00  
 00  
 USB Human Interface Device Yes HIDCLASS  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) input.inf Not Available  
 USB\VID\_03F0&PID\_1027&MI\_01\7&2CD6FDA9&0&00  
 01  
 HID Keyboard Device Yes KEYBOARD 5.2.3790.1830  
 10/1/2002 (Standard keyboards)  
 keyboard.inf Not Available  
 HID\VID\_03F0&PID\_1027&MI\_00\8&DED77A1&0&000  
 0  
 USB Human Interface Device Yes HIDCLASS  
 5.2.3790.1830 10/1/2002 (Standard  
 system devices) input.inf Not Available  
 USB\VID\_03F0&PID\_1027&MI\_00\7&2CD6FDA9&0&00  
 00  
 USB Composite Device Yes USB  
 5.2.3790.1830 10/1/2002 (Standard USB  
 Host Controller) usb.inf Not Available  
 USB\VID\_03F0&PID\_1027\6&18FFBC52&0&1  
 USB Root Hub Yes USB 5.2.3790.1830  
 10/1/2002 (Standard USB Host Controller)  
 usbport.inf Not Available  
 USB\ROOT\_HUB\5&26BC3420&0  
 Standard Universal PCI to USB Host Controller Yes  
 USB 5.2.3790.1830 10/1/2002  
 (Standard USB Host Controller)  
 usbport.inf Not Available  
 PCI\VEN\_103C&DEV\_3300&SUBSYS\_3305103C&REV\_0  
 0\4&2014205D&0&24F0  
 Base System Device Not Available UNKNOWN Not  
 Available Not Available Not Available Not  
 Available Not Available  
 PCI\VEN\_0E11&DEV\_B204&SUBSYS\_3305103C&REV\_0  
 3\4&2014205D&0&22F0  
 Base System Device Not Available UNKNOWN Not  
 Available Not Available Not Available Not  
 Available Not Available  
 PCI\VEN\_0E11&DEV\_B203&SUBSYS\_3305103C&REV\_0  
 3\4&2014205D&0&20F0  
 Default Monitor Yes MONITOR 5.2.3790.1830  
 10/1/2002 (Standard monitor types)  
 monitor.inf Not Available  
 DISPLAY\DEFAULT\_MONITOR\5&E64F3B&0&12345678  
 &01&03  
 Standard VGA Graphics Adapter Yes DISPLAY  
 5.2.3790.1830 10/1/2002 (Standard  
 display types) display.inf Not Available  
 PCI\VEN\_1002&DEV\_515E&SUBSYS\_31FB103C&REV\_0  
 2\4&2014205D&0&18F0  
 Intel(R) 82801 PCI Bridge - 244E Yes  
 SYSTEM 5.2.3790.3959 10/1/2002  
 Intel machine.inf Not Available

```

PCI\VEN_8086&DEV_244E&SUBSYS_00000000&REV_D
9\3&61AAA01&0&F0
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB20\4&392538C3&0
Standard Enhanced PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_268C&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EF
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&41C0314&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EB
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&A54F890&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_268A&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&EA
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&37897620&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_2689&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E9
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\4&7353027&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&E8
HP NC373i Multifunction Gigabit Server Adapter Yes
NET 3.4.10.0 5/25/2007 Hewlett-
Packard Company oem11.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&154EFE07&0&20050500
HP NC373i Virtual Bus Device Yes SYSTEM
3.4.10.0 5/22/2007 Hewlett-Packard Company
oem13.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
2\5&1F051E87&0&0000E1

```

```

PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
3\4&110C88BD&0&00E1
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_2692&SUBSYS_00000000&REV_0
9\3&61AAA01&0&E1
HP NC373i Multifunction Gigabit Server Adapter Yes
NET 3.4.10.0 5/25/2007 Hewlett-
Packard Company oem11.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&183F41DD&0&20050300
HP NC373i Virtual Bus Device Yes SYSTEM
3.4.10.0 5/22/2007 Hewlett-Packard Company
oem13.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
2\5&43097C6&0&0000E0
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
3\4&187919FE&0&00E0
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_2690&SUBSYS_00000000&REV_0
9\3&61AAA01&0&E0
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F6&SUBSYS_00000000&REV_B
1\3&61AAA01&0&B0
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F5&SUBSYS_00000000&REV_B
1\3&61AAA01&0&A8
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F1&SUBSYS_00000000&REV_B
1\3&61AAA01&0&88
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F3&SUBSYS_00000000&REV_B
1\3&61AAA01&0&98
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F1&SUBSYS_00000000&REV_B
1\3&61AAA01&0&82
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available

```

```

PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
1\3&61AAA01&0&81
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
1\3&61AAA01&0&80
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
350CFB&0&0700004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
350CFB&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
350CFB&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
350CFB&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
350CFB&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
350CFB&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
350CFB&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
350CFB&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem9.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&8C2005&0&0038
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E7&SUBSYS_00000000&REV_B
1\3&61AAA01&0&38
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
1BE01&0&0700004000000000

```

```

Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
1BE01&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
1BE01&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
1BE01&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
1BE01&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
1BE01&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
1BE01&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
1BE01&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem9.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&79C23&0&0030
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E6&SUBSYS_00000000&REV_B
1\3&61AAA01&0&30
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
5911583&0&0700004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
5911583&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
5911583&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard

```

```

oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
5911583&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
5911583&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
5911583&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
5911583&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
5911583&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem9.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&1AB8B18D&0&0028
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E5&SUBSYS_00000000&REV_B
1\3&61AAA01&0&28
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&2
8B0A89C&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem9.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&237315C2&0&0020
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E4&SUBSYS_00000000&REV_B
1\3&61AAA01&0&20
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0900004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0800004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available

```

```

HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0700004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
79742&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem9.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&EFC3E79&0&0018
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E3&SUBSYS_00000000&REV_B
1\3&61AAA01&0&18
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
52\6&1858D38C&0&000400
HP Virtual LUN Yes SYSTEM 5.2.3790.1830
10/1/2002 Compaq scsudev.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CIS2\6&1858D38C&0&000000
Smart Array P600 Controller Yes SCSIADAPTER
6.6.0.64 3/20/2007 Hewlett-Packard Company
oem8.inf Not Available
PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
0\5&19379C89&0&080310

```

```

PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_350C&SUBSYS_00000000&REV_0
1\4&641DA44&0&0310
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3518&SUBSYS_00000000&REV_0
1\5&38BD847A&0&100010
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
724FE17&0&0900004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
724FE17&0&0800004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
724FE17&0&0700004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
724FE17&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
724FE17&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
724FE17&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
724FE17&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
724FE17&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
724FE17&0&0000004000000000

```

```

Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem9.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&14CDF429&0&00080010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3514&SUBSYS_00000000&REV_0
1\5&38BD847A&0&080010
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0900004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0800004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0700004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.12.2.64 1/23/2005 Hewlett-Packard
oem10.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
BBB46D2&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006

```

```

Hewlett-Packard oem9.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&356D7036&0&00000010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3510&SUBSYS_00000000&REV_0
1\5&38BD847A&0&000010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3500&SUBSYS_00000000&REV_0
1\4&641DA44&0&0010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E2&SUBSYS_00000000&REV_B
1\3&61AAA01&0&10
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25D8&SUBSYS_00000000&REV_B
1\3&61AAA01&0&00
PCI bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\2&DABA3FF&0
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_23\7
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_23\6
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_23\5
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_23\4
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_23\3
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_23\2
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_23\1
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_23\0

```



```

Microsoft ACPI-Compliant System      Yes
SYSTEM 5.2.3790.1830                 10/1/2002
Microsoft ACPI.inf Not Available
ACPI_HAL\PNPFC08\0
ACPI Multiprocessor x64-based PC      Yes
COMPUTER 5.2.3790.1830              10/1/2002
(Standard computers)                 hal.inf Not
Available ROOT\ACPI_HAL\0000
Not Available Not Available Not Available
Not Available Not Available Not Available
Available Not Available Not Available
HTREE\ROOT\0

```

[Environment Variables]

```

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path C:\Program
Files\HP\NCU;%SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;C:\Program Files
(x86)\Microsoft SQL Server\90\Tools\Binn\;C:\Program Files\Microsoft SQL Server\90\Tools\Binn\;C:\Program
Files(x86)\Microsoft SQL
Server\90\Tools\Binn\;C:\Program Files
(x86)\Microsoft SQL Server\90\DTS\Binn\;C:\Program
Files(x86)\Microsoft SQL
Server\90\Tools\Binn\VSShell\Common7\IDE\;C:\Program
Files(x86)\Microsoft Visual Studio
8\Common7\IDE\PrivateAssemblies\;c:\Program
Files\Microsoft SQL Server\90\DTS\Binn\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
FP_NO_HOST_CHECK NO <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE AMD64 <SYSTEM>
PROCESSOR_LEVEL 6 <SYSTEM>
PROCESSOR_IDENTIFIER EM64T Family 6 Model 23
Stepping 6, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 1706 <SYSTEM>
NUMBER_OF_PROCESSORS 8 <SYSTEM>
ClusterLog C:\WINDOWS\Cluster\cluster.log
PATHEXT <SYSTEM>
.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
;.WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\
<SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
VIOLET\Administrator

```

```

TMP %USERPROFILE%\Local Settings\Temp
VIOLET\Administrator

```

[Print Jobs]

Document	Size	Owner	Notify	Status
	Time Submitted		Start Time	
	Until Time		Elapsed Time	
	Pages Printed		Job ID	Priority
	Parameters		Driver	Print
Processor	Host	Print Queue	Data	Type Name

[Network Connections]

Local Name	Remote Name	Type
Status	User Name	

[Running Tasks]

Name	Path	Process ID	Priority	Min
Working Set	Max Working Set	Start Time		
Version	Size	File Date		
system idle process	Not Available	0	0	0
Not Available	Not Available	Not Available	Not	Not
Available	Not Available	Not Available	Not	Not
Available	Not Available	Not Available	Not	Not
system	Not Available	4	8	0
1380	Not Available	Not Available	Not	Available
Not Available	Not Available	Not Available	Not	Not
smss.exe	Not Available	320	11	200
1380	11/6/2007	11:07 AM	Not	Not Available
Not Available	Not Available	Not Available	Not	Not
csrss.exe	Not Available	368	13	Not
Available	Not Available	11/6/2007	11:07 AM	Not
Available	Not Available	Not Available	Not	Not
winlogon.exe	c:\windows\system32\winlogon.exe			
392	13	200	1380	
11/6/2007	11:07 AM	5.2.3790.3959		
(srv03_sp2_rtm.070216-1710)	922.00 KB (944,128			
bytes)	10/3/2007	2:30 PM		
services.exe	c:\windows\system32\services.exe			
440	9	200	1380	
11/6/2007	11:07 AM	5.2.3790.3959		
(srv03_sp2_rtm.070216-1710)	219.00 KB (224,256			
bytes)	12/19/2005	8:38 AM		
lsass.exe	c:\windows\system32\lsass.exe	452	9	
200	1380	11/6/2007	11:07 AM	
5.2.3790.1830 (srv03_sp1_rtm.050324-1447)				
14.00 KB (14,336 bytes)		12/19/2005		
8:37 AM				
svchost.exe	c:\windows\system32\svchost.exe			
604	8	200	1380	
11/6/2007	11:07 AM	5.2.3790.3959		
(srv03_sp2_rtm.070216-1710)	25.00 KB (25,600 bytes)			
10/3/2007	2:30 PM			
svchost.exe	Not Available	696	8	
Not Available	Not Available	Not Available	Not	Not
11/6/2007	11:07 AM	Not Available	Not	Not
Available	Not Available	Not Available	Not	Not
svchost.exe	Not Available	756	8	
Not Available	Not Available	Not Available	Not	Not
11/6/2007	11:07 AM	Not Available	Not	Not
Available	Not Available	Not Available	Not	Not

```

svchost.exe Not Available 776 8
Not Available Not Available
11/6/2007 11:07 AM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
816 8 200 1380
11/6/2007 11:07 AM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 25.00 KB (25,600 bytes)
10/3/2007 2:30 PM
msdtc.exe Not Available 872 8 Not
Available Not Available 11/6/2007 11:07 AM Not
Available Not Available Not Available
msftesql.exe Not Available 1004 8
Not Available Not Available
11/6/2007 11:07 AM Not Available Not
Available Not Available
sqlwriter.exe c:\program files\microsoft sql
server\90\shared\sqlwriter.exe 1192 8
200 1380 11/6/2007 11:07 AM
2005.090.3042.00 152.36 KB (156,016
bytes) 2/10/2007 9:03 AM
svchost.exe c:\windows\system32\svchost.exe
1280 8 200 1380
11/6/2007 11:07 AM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 25.00 KB (25,600 bytes)
10/3/2007 2:30 PM
explorer.exe c:\windows\explorer.exe
1560 8 200 1380
11/6/2007 11:08 AM 6.00.3790.3959
(srv03_sp2_rtm.070216-1710) 1.30 MB (1,364,480
bytes) 10/3/2007 2:30 PM
cpqteam.exe c:\program
files\hp\ncu\cpqteam.exe 1620 8 200
1380 11/6/2007 11:08 AM 8.70.0.15
81.50 KB (83,456 bytes) 6/28/2007
1:10 PM
wmiprvse.exe Not Available 1716 8
Not Available Not Available
11/6/2007 11:08 AM Not Available Not
Available Not Available
csrss.exe Not Available 840 13 Not
Available Not Available 11/6/2007 2:19 PM Not
Available Not Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe
908 13 200 1380
11/6/2007 2:19 PM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 922.00 KB (944,128
bytes) 10/3/2007 2:30 PM
rdpclip.exe c:\windows\system32\rdpclip.exe
1524 8 200 1380
11/6/2007 2:19 PM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 99.00 KB (101,376
bytes) 6/21/2007 10:09 AM
explorer.exe c:\windows\explorer.exe
1616 8 200 1380
11/6/2007 2:19 PM 6.00.3790.3959
(srv03_sp2_rtm.070216-1710) 1.30 MB (1,364,480
bytes) 10/3/2007 2:30 PM
cpqteam.exe c:\program
files\hp\ncu\cpqteam.exe 1836 8 200
1380 11/6/2007 2:19 PM 8.70.0.15
81.50 KB (83,456 bytes) 6/28/2007
1:10 PM

```

```

helpctr.exe c:\windows\pchealth\helpctr\binaries\helpctr.exe
1044 8 200 1380
11/6/2007 2:19 PM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 1.30 MB (1,363,456 bytes)
6/21/2007 10:10 AM
wmiprvse.exe Not Available 1824 8
Not Available Not Available
11/6/2007 2:19 PM Not Available Not Available
Available Not Available
helpsvcs.exe c:\windows\pchealth\helpctr\binaries\helpsvcs.exe
132 8 200 1380
11/6/2007 2:19 PM 5.2.3790.3959
(srv03_sp2_rtm.070216-1710) 1.52 MB (1,591,296 bytes)
6/21/2007 10:10 AM

[Loaded Modules]

Name Version Size File Date Manufacturer Path
winlogon 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
922.00 KB (944,128 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\winlogon.exe
ntdll 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.20 MB (1,254,400 bytes) 12/19/2005
8:37 AM Microsoft Corporation
c:\windows\system32\ntdll.dll
kernel32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.43 MB (1,503,232 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\kernel32.dll
advapi32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.00 MB (1,051,648 bytes) 12/19/2005
8:36 AM Microsoft Corporation
c:\windows\system32\advapi32.dll
rpcrt4 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.58 MB (1,653,248 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\rpcrt4.dll
secur32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
120.00 KB (122,880 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\secur32.dll
crypt32 5.131.3790.3959 (srv03_sp2_rtm.070216-1710)
1.36 MB (1,429,504 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\crypt32.dll
msvcrt 7.0.3790.3959 (srv03_sp2_rtm.070216-1710)
508.00 KB (520,192 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\msvcrt.dll
user32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.04 MB (1,086,976 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\user32.dll
gdi32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
603.50 KB (617,984 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\gdi32.dll
msasn1 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
152.50 KB (156,160 bytes) 10/3/2007

```

```

2:30 PM Microsoft Corporation
c:\windows\system32\msasn1.dll
nddeapi 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
25.00 KB (25,600 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\nddeapi.dll
profmap 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
36.00 KB (36,864 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\profmap.dll
netapi32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
589.00 KB (603,136 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\netapi32.dll
userenv 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.02 MB (1,071,104 bytes) 12/19/2005
8:39 AM Microsoft Corporation
c:\windows\system32\userenv.dll
psapi 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
29.00 KB (29,696 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\psapi.dll
regapi 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
108.50 KB (111,104 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\regapi.dll
setupapi 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.45 MB (1,524,224 bytes) 12/19/2005
8:38 AM Microsoft Corporation
c:\windows\system32\setupapi.dll
version 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
28.00 KB (28,672 bytes) 12/19/2005
8:39 AM Microsoft Corporation
c:\windows\system32\version.dll
winsta 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
89.00 KB (91,136 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\winsta.dll
ws2_32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
174.50 KB (178,688 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\ws2_32.dll
ws2help 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
30.50 KB (31,232 bytes) 12/19/2005
8:39 AM Microsoft Corporation
c:\windows\system32\ws2help.dll
msgina 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.14 MB (1,193,472 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\msgina.dll
shsvcs 6.00.3790.3959 (srv03_sp2_rtm.070216-1710)
194.00 KB (198,656 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\shsvcs.dll
shlwapi 6.00.3790.3959 (srv03_sp2_rtm.070216-1710)
607.00 KB (621,568 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\shlwapi.dll
sfc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
6.00 KB (6,144 bytes) 12/19/2005
8:38 AM Microsoft Corporation
c:\windows\system32\sfc.dll

```

```

sfc_os 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
183.50 KB (187,904 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\sfc_os.dll
wintrust 5.131.3790.3959 (srv03_sp2_rtm.070216-1710)
297.50 KB (304,640 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\wintrust.dll
imagehlp 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
57.50 KB (58,880 bytes) 12/19/2005
8:37 AM Microsoft Corporation
c:\windows\system32\imagehlp.dll
ole32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
2.50 MB (2,622,976 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\ole32.dll
comctl32 6.0 (srv03_sp2_rtm.070216-1710)
1.51 MB (1,584,640 bytes) 2/18/2007
10:24 AM Microsoft Corporation
c:\windows\winsxs\amd64_microsoft.windows.c
ommon-controls_6595b64144ccfd6f_6.0.3790.3959_x-
ww_0a7b2435\comctl32.dll
winscard 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
229.50 KB (235,008 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\winscard.dll
wtsapi32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
29.00 KB (29,696 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\wtsapi32.dll
winmm 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
303.50 KB (310,784 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\winmm.dll
sxs 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.89 MB (1,977,856 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\sxs.dll
shell32 6.00.3790.3959 (srv03_sp2_rtm.070216-1710)
10.02 MB (10,505,728 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\shell32.dll
wldap32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
390.50 KB (399,872 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\wldap32.dll
rsaenh 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
298.84 KB (306,008 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\rsaenh.dll
csddl 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
151.50 KB (155,136 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\csddl.dll
dimntfy 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
28.00 KB (28,672 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\dimntfy.dll
wlnotify 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
148.50 KB (152,064 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\wlnotify.dll

```

winspool 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 247.00 KB (252,928 bytes) 12/19/2005  
8:39 AM Microsoft Corporation  
c:\windows\system32\winspool.drv  
mpr 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 115.00 KB (117,760 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\mpr.dll  
oleaut32 5.2.3790.3959 1.07 MB (1,121,792 bytes) 12/19/2005 8:38 AM Microsoft Corporation  
c:\windows\system32\oleaut32.dll  
comctl32 5.82 (srv03\_sp2\_rtm.070216-1710) 935.00 KB (957,440 bytes) 2/18/2007  
10:24 AM Microsoft Corporation  
c:\windows\winsxs\amd64\_microsoft.windows.c  
ommon-controls\_6595b64144ccf1df\_5.82.3790.3959\_x-  
ww\_ab06deb0\comctl32.dll  
uxtheme 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710) 494.50 KB (506,368 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\uxtheme.dll  
samlib 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 69.50 KB (71,168 bytes) 12/19/2005  
8:38 AM Microsoft Corporation  
c:\windows\system32\samlib.dll  
cscui 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 441.00 KB (451,584 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\cscui.dll  
clbcatq 2001.12.4720.3959 (srv03\_sp2\_rtm.070216-1710) 862.50 KB (883,200 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\clbcatq.dll  
comres 2001.12.4720.3959 (srv03\_sp2\_rtm.070216-1710) 779.50 KB (798,208 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\comres.dll  
ntmarta 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 222.50 KB (227,840 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\ntmarta.dll  
xpsp2res 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 2.77 MB (2,899,456 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\xpsp2res.dll  
wbemprox 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447) 38.00 KB (38,912 bytes) 6/21/2007  
10:09 AM Microsoft Corporation  
c:\windows\system32\wbem\wbemprox.dll  
wbemcomn 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 518.00 KB (530,432 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemcomn.dll  
wbemsvc 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447) 58.00 KB (59,392 bytes) 6/21/2007  
10:09 AM Microsoft Corporation  
c:\windows\system32\wbem\wbemsvc.dll  
fastprox 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 866.50 KB (887,296 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\wbem\fastprox.dll  
msvcp60 7.0.3790.1830 (srv03\_sp1\_rtm.050324-1447) 919.50 KB (941,568 bytes) 12/19/2005

8:37 AM Microsoft Corporation  
c:\windows\system32\msvcp60.dll  
ntdsapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 127.50 KB (130,560 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\ntdsapi.dll  
dnsapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 298.50 KB (305,664 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\dnsapi.dll  
services 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 219.00 KB (224,256 bytes) 12/19/2005  
8:38 AM Microsoft Corporation  
c:\windows\system32\services.exe  
scesrv 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 595.00 KB (609,280 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\scesrv.dll  
authz 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 171.00 KB (175,104 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\authz.dll  
umpnpmgr 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 205.00 KB (209,920 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\umpnpmgr.dll  
ncobjapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 77.50 KB (79,360 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\ncobjapi.dll  
eventlog 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 127.50 KB (130,560 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\eventlog.dll  
lsass 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447) 14.00 KB (14,336 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\lsass.exe  
lsaasrv 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 1.49 MB (1,566,720 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\lsaasrv.dll  
samsvr 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 1.01 MB (1,059,328 bytes) 12/19/2005  
8:38 AM Microsoft Corporation  
c:\windows\system32\samsvr.dll  
cryptdll 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 47.00 KB (48,128 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\cryptdll.dll  
msprivs 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447) 47.50 KB (48,640 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\msprivs.dll  
kerberos 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 706.00 KB (722,944 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\kerberos.dll  
msv1\_0 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 253.00 KB (259,072 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\msv1\_0.dll

iphlpapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 178.50 KB (182,784 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\iphlpapi.dll  
netlogon 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 665.50 KB (681,472 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\netlogon.dll  
w32time 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 398.00 KB (407,552 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\w32time.dll  
schannel 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 248.00 KB (253,952 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\schannel.dll  
wdigest 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 131.00 KB (134,144 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\wdigest.dll  
rassfm 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447) 36.00 KB (36,864 bytes) 12/19/2005  
8:38 AM Microsoft Corporation  
c:\windows\system32\rassfm.dll  
kdcsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 410.00 KB (419,840 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\kdcsvc.dll  
ntdsa 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 2.83 MB (2,967,040 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\ntdsa.dll  
ntdsatq 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447) 51.00 KB (52,224 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\ntdsatq.dll  
mswsock 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 480.50 KB (492,032 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\mswsock.dll  
esent 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 2.26 MB (2,367,488 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\esent.dll  
scecli 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 308.00 KB (315,392 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\scecli.dll  
ws03res 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 794.00 KB (813,056 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\ws03res.dll  
hnetcfg 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 568.00 KB (581,632 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\hnetcfg.dll  
wshtcpip 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 29.00 KB (29,696 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\wshtcpip.dll  
ipsecsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710) 361.50 KB (370,176 bytes) 10/3/2007

2:30 PM Microsoft Corporation  
 c:\windows\system32\ipsecsvc.dll  
 oakley 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 385.00 KB (394,240 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\oakley.dll  
 winipsec 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 52.50 KB (53,760 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\winipsec.dll  
 pstorsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 36.00 KB (36,864 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\pstorsvc.dll  
 psbase 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 124.00 KB (126,976 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\psbase.dll  
 dssenh 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 231.34 KB (236,888 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\dssenh.dll  
 wlbctrl 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
 137.50 KB (140,800 bytes) 12/19/2005  
 8:39 AM Microsoft Corporation  
 c:\windows\system32\wlbctrl.dll  
 svchost 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 25.00 KB (25,600 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\svchost.exe  
 rpcss 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 819.00 KB (838,656 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\rpcss.dll  
 wkssvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 221.00 KB (226,304 bytes) 12/19/2005  
 8:39 AM Microsoft Corporation  
 c:\windows\system32\wkssvc.dll  
 aelupsvc 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
 31.50 KB (32,256 bytes) 12/19/2005  
 8:36 AM Microsoft Corporation  
 c:\windows\system32\aelupsvc.dll  
 apphelp 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 241.00 KB (246,784 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\apphelp.dll  
 cryptsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 114.00 KB (116,736 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\cryptsvc.dll  
 certcli 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 371.50 KB (380,416 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\certcli.dll  
 atl 3.05.2284 96.50 KB (98,816 bytes)  
 12/19/2005 8:36 AM Microsoft Corporation  
 c:\windows\system32\atl.dll  
 vssapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 1.26 MB (1,320,960 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\vssapi.dll  
 dmserver 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 36.50 KB (37,376 bytes) 10/3/2007

2:30 PM Microsoft Corporation  
 c:\windows\system32\dmserver.dll  
 es 2001.12.4720.3959 (srv03\_sp2\_rtm.070216-1710)  
 357.00 KB (365,568 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\es.dll  
 pchsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 75.50 KB (77,312 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\pchealth\helpctr\binaries\pchsvc  
 .dll  
 srvsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 156.50 KB (160,256 bytes) 12/19/2005  
 8:38 AM Microsoft Corporation  
 c:\windows\system32\srvsvc.dll  
 seclogon 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 27.50 KB (28,160 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\seclogon.dll  
 sens 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 63.50 KB (65,024 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\sens.dll  
 comsvcs 2001.12.4720.3959 (srv03\_sp2\_rtm.070216-1710)  
 2.13 MB (2,234,880 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\comsvcs.dll  
 trkwks 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 177.50 KB (181,760 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\trkwks.dll  
 wmisvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 227.50 KB (232,960 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\wmisvc.dll  
 browser 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 125.50 KB (128,512 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\browser.dll  
 netman 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 454.50 KB (465,408 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\netman.dll  
 netshell 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 2.33 MB (2,438,656 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\netshell.dll  
 rtutils 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
 66.00 KB (67,584 bytes) 12/19/2005  
 8:38 AM Microsoft Corporation  
 c:\windows\system32\rtutils.dll  
 credui 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 202.00 KB (206,848 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\credui.dll  
 clusapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 127.00 KB (130,048 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\clusapi.dll  
 mprapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 154.50 KB (158,208 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\mprapi.dll

activeds 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 348.50 KB (356,864 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\activeds.dll  
 adslpc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 240.50 KB (246,272 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\adslpc.dll  
 rasapi32 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 410.00 KB (419,840 bytes) 12/19/2005  
 8:38 AM Microsoft Corporation  
 c:\windows\system32\rasapi32.dll  
 rasman 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 95.50 KB (97,792 bytes) 12/19/2005  
 8:38 AM Microsoft Corporation  
 c:\windows\system32\rasman.dll  
 tapi32 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 332.50 KB (340,480 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\tapi32.dll  
 wzcsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 644.50 KB (659,968 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\wzcsvc.dll  
 wmi 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
 5.50 KB (5,632 bytes) 12/19/2005  
 8:39 AM Microsoft Corporation  
 c:\windows\system32\wmi.dll  
 dhcpcsvc 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 220.50 KB (225,792 bytes) 12/19/2005  
 8:36 AM Microsoft Corporation  
 c:\windows\system32\dhcpcsvc.dll  
 wininet 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 1.14 MB (1,190,912 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\wininet.dll  
 wzcsapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 50.50 KB (51,712 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\wzcsapi.dll  
 wbemcore 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 1.22 MB (1,282,560 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\wbem\wbemcore.dll  
 esscli 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 626.50 KB (641,536 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\wbem\esscli.dll  
 wmiutils 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 171.00 KB (175,104 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\wbem\wmiutils.dll  
 repdrvfs 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 353.50 KB (361,984 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\wbem\repdrvfs.dll  
 wmiprvsd 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 743.00 KB (760,832 bytes) 10/3/2007  
 2:30 PM Microsoft Corporation  
 c:\windows\system32\wbem\wmiprvsd.dll  
 wbemess 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
 532.50 KB (545,280 bytes) 10/3/2007

2:30 PM Microsoft Corporation  
c:\windows\system32\wbem\wbemess.dll  
rasdlg 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
859.50 KB (880,128 bytes) 12/19/2005  
8:38 AM Microsoft Corporation  
c:\windows\system32\rasdlg.dll  
ncprov 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
73.00 KB (74,752 bytes) 6/21/2007  
10:09 AM Microsoft Corporation  
c:\windows\system32\wbem\ncprov.dll  
netrap 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
26.00 KB (26,624 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\netrap.dll  
netcfgx 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
1.29 MB (1,354,752 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\netcfgx.dll  
sqlwriter 2005.090.3042.00 152.36 KB (156,016  
bytes) 2/10/2007 9:03 AM Microsoft Corporation  
c:\program files\Microsoft sql  
server\90\shared\sqlwriter.exe  
msvcr80 8.00.50727.42 803.50 KB (822,784  
bytes) 9/22/2005 11:26 PM Microsoft Corporation  
c:\windows\winsxs\amd64\_microsoft.vc80.crt\_  
1fc8b3b9a1e18e3b\_8.0.50727.42\_x-  
ww\_3fea50ad\msvcr80.dll  
sqlwvss 2005.090.3042.00 365.86 KB (374,640  
bytes) 2/10/2007 9:03 AM Microsoft Corporation  
c:\program files\Microsoft sql  
server\90\shared\sqlwvss.dll  
msvcpr80 8.00.50727.42 1.05 MB (1,097,728  
bytes) 9/22/2005 11:28 PM Microsoft Corporation  
c:\windows\winsxs\amd64\_microsoft.vc80.crt\_  
1fc8b3b9a1e18e3b\_8.0.50727.42\_x-  
ww\_3fea50ad\msvcpr80.dll  
termsrv 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
355.50 KB (364,032 bytes) 6/21/2007  
10:09 AM Microsoft Corporation  
c:\windows\system32\termsrv.dll  
icaapi 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
27.50 KB (28,160 bytes) 6/21/2007  
10:09 AM Microsoft Corporation  
c:\windows\system32\icaapi.dll  
mstlsapi 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
188.00 KB (192,512 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\mstlsapi.dll  
rdpwsx 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
170.13 KB (174,216 bytes) 6/21/2007  
10:09 AM Microsoft Corporation  
c:\windows\system32\rdpwsx.dll  
explorer 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
1.30 MB (1,364,480 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\explorer.exe  
browseui 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
1.53 MB (1,605,120 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\browseui.dll  
shdocvw 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
2.33 MB (2,438,144 bytes) 10/3/2007

2:30 PM Microsoft Corporation  
c:\windows\system32\shdocvw.dll  
cryptui 5.131.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
705.50 KB (722,432 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\cryptui.dll  
themeui 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
531.50 KB (544,256 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\themeui.dll  
msimg32 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
6.50 KB (6,656 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\msimg32.dll  
linkinfo 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
31.00 KB (31,744 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\linkinfo.dll  
ntshrui 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
184.00 KB (188,416 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\ntshrui.dll  
urlmon 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
1.04 MB (1,088,000 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32?urlmon.dll  
msi 3.1.4000.3959 4.27 MB (4,478,976  
bytes) 10/3/2007 2:30 PM Microsoft Corporation  
c:\windows\system32\msi.dll  
webcheck 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
438.50 KB (449,024 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\webcheck.dll  
wsock32 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
24.50 KB (25,088 bytes) 12/19/2005  
8:39 AM Microsoft Corporation  
c:\windows\system32\wsock32.dll  
stobject 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
142.50 KB (145,920 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\stobject.dll  
batmeter 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
41.50 KB (42,496 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\batmeter.dll  
powrprof 6.00.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
32.50 KB (33,280 bytes) 12/19/2005  
8:38 AM Microsoft Corporation  
c:\windows\system32\powrprof.dll  
drprov 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
24.00 KB (24,576 bytes) 12/19/2005  
8:36 AM Microsoft Corporation  
c:\windows\system32\drprov.dll  
ntlanman 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
72.00 KB (73,728 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\ntlanman.dll  
netui0 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
130.00 KB (133,120 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\netui0.dll  
netui1 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
338.50 KB (346,624 bytes) 12/19/2005

8:37 AM Microsoft Corporation  
c:\windows\system32\netui1.dll  
davclnt 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
39.50 KB (40,448 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\davclnt.dll  
browseui 6.00.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
63.00 KB (64,512 bytes) 12/19/2005  
8:36 AM Microsoft Corporation  
c:\windows\system32\browseui.dll  
mprui 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
67.50 KB (69,120 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\mprui.dll  
netui2 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
542.00 KB (555,008 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\netui2.dll  
comdlg32 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
447.00 KB (457,728 bytes) 12/19/2005  
8:36 AM Microsoft Corporation  
c:\windows\system32\comdlg32.dll  
netmsg 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
179.00 KB (183,296 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\netmsg.dll  
netplwiz 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
938.50 KB (961,024 bytes) 10/3/2007  
2:30 PM Microsoft Corporation  
c:\windows\system32\netplwiz.dll  
mydocs 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
101.00 KB (103,424 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\mydocs.dll  
shdoclc 6.00.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
589.50 KB (603,648 bytes) 12/19/2005  
8:38 AM Microsoft Corporation  
c:\windows\system32\shdoclc.dll  
actxprxy 6.00.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
220.50 KB (225,792 bytes) 12/19/2005  
8:36 AM Microsoft Corporation  
c:\windows\system32\actxprxy.dll  
cpqteam 8.70.0.15 81.50 KB (83,456 bytes)  
6/28/2007 1:10 PM Hewlett-Packard Company  
c:\program files\hp\ncu\cpqteam.exe  
rdpsnd 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
25.00 KB (25,600 bytes) 12/19/2005  
8:38 AM Microsoft Corporation  
c:\windows\system32\rdpsnd.dll  
scredir 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
38.50 KB (39,424 bytes) 12/19/2005  
8:38 AM Microsoft Corporation  
c:\windows\system32\scredir.dll  
msacm32 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
31.00 KB (31,744 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\msacm32.drv  
msacm32 5.2.3790.3959 (srv03\_sp2\_rtm.070216-1710)  
112.00 KB (114,688 bytes) 12/19/2005  
8:37 AM Microsoft Corporation  
c:\windows\system32\msacm32.dll  
imaadp32 5.2.3790.1830 (srv03\_sp1\_rtm.050324-1447)  
24.00 KB (24,576 bytes) 12/19/2005

```

8:37 AM Microsoft Corporation
c:\windows\system32\imaadp32.acm
msadp32 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
23.50 KB (24,064 bytes) 12/19/2005
8:37 AM Microsoft Corporation
c:\windows\system32\msadp32.acm
msg711 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
13.50 KB (13,824 bytes) 12/19/2005
8:37 AM Microsoft Corporation
c:\windows\system32\msg711.acm
msgsm32 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
34.50 KB (35,328 bytes) 12/19/2005
8:37 AM Microsoft Corporation
c:\windows\system32\msgsm32.acm
tssoft32 1.01 13.50 KB (13,824 bytes)
12/19/2005 8:39 AM DSP GROUP, INC.
c:\windows\system32\tssoft32.acm
tsd32 1.03 24.50 KB (25,088 bytes)
12/19/2005 8:39 AM DSP GROUP, INC.
c:\windows\system32\tsd32.dll
rdpclip 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
99.00 KB (101,376 bytes) 6/21/2007
10:09 AM Microsoft Corporation
c:\windows\system32\rdpclip.exe
mlang 6.00.3790.3959 (srv03_sp2_rtm.070216-1710)
686.00 KB (702,464 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\mlang.dll
helpctr 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.30 MB (1,363,456 bytes) 6/21/2007
10:10 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\helpctr.exe
hcappres 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
7.50 KB (7,680 bytes) 6/21/2007
10:10 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\hcappres.dll
itss 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
208.50 KB (213,504 bytes) 12/19/2005
8:37 AM Microsoft Corporation
c:\windows\system32\itss.dll
msxml3 8.80.1185.0 2.04 MB (2,144,256
bytes) 12/19/2005 8:37 AM Microsoft Corporation
c:\windows\system32\msxml3.dll
pchshell 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
155.00 KB (158,720 bytes) 6/21/2007
10:10 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\pchshell.dll
mshtml 6.00.3790.3959 (srv03_sp2_rtm.070216-1710)
5.72 MB (5,999,616 bytes) 12/19/2005
8:37 AM Microsoft Corporation
c:\windows\system32\mshtml.dll
msls31 3.10.349.0 357.00 KB (365,568
bytes) 12/19/2005 8:37 AM Microsoft Corporation
c:\windows\system32\msls31.dll
msimtf 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
380.50 KB (389,632 bytes) 12/19/2005
8:37 AM Microsoft Corporation
c:\windows\system32\msimtf.dll
msctf 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
617.50 KB (632,320 bytes) 12/19/2005

```

```

8:37 AM Microsoft Corporation
c:\windows\system32\msctf.dll
jscript 5.6.0.8832 976.00 KB (999,424
bytes) 12/19/2005 8:37 AM Microsoft Corporation
c:\windows\system32\jscript.dll
imm32 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
208.00 KB (212,992 bytes) 10/3/2007
2:30 PM Microsoft Corporation
c:\windows\system32\imm32.dll
mshtml 6.00.3790.3959 (srv03_sp2_rtm.070216-1710)
905.50 KB (927,232 bytes) 12/19/2005
8:37 AM Microsoft Corporation
c:\windows\system32\mshtml.dll
vbscript 5.6.0.8832 647.00 KB (662,528
bytes) 12/19/2005 8:39 AM Microsoft Corporation
c:\windows\system32\vbscript.dll
msinfo 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
635.50 KB (650,752 bytes) 6/21/2007
10:10 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\msinfo
.dll
mfc42u 6.50.9146.0 1.39 MB (1,460,992
bytes) 12/19/2005 8:37 AM Microsoft Corporation
c:\windows\system32\mfc42u.dll
riched32 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
7.00 KB (7,168 bytes) 12/19/2005
8:38 AM Microsoft Corporation
c:\windows\system32\riched32.dll
riched20 5.31.23.1225 1.11 MB (1,160,192
bytes) 12/19/2005 8:38 AM Microsoft Corporation
c:\windows\system32\riched20.dll
helpsvc 5.2.3790.3959 (srv03_sp2_rtm.070216-1710)
1.52 MB (1,591,296 bytes) 6/21/2007
10:10 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\helpsvc
.exe

[Services]

Display Name Name State Start Mode
Service Type Path Error Control
Start Name Tag ID
Application Experience Lookup Service AeLookupSvc
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0

```

```

Windows Audio AudioSrv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser Browser Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service C1Svc Stopped Disabled
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\mscorsvw.exe Ignore LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_x64
clr_optimization_v2.0.50727_64
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\mscorsvw.exe Ignore LocalSystem 0
COM+ System Application COMSysApp Stopped
Manual Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DCOM Server Process Launcher DcomLaunch
Running Auto Share Process
c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0
Distributed File System Dfs Stopped
Manual Own Process
c:\windows\system32\dfssvc.exe
Normal LocalSystem 0
DHCP Client Dhcp Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmdadmin Stopped Manual Share Process
c:\windows\system32\dmdadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

DNS Client      Dnscache Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support helpsvc Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL HTTPFilter Stopped Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IAS Jet Database Access IASJet Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k iasjet
Normal LocalSystem 0
IMAPI CD-Burning COM Service ImapiService
Stopped Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process c:\windows\system32\ismserv.exe
Normal LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Workstation lanmanworkstation Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
License Logging LicenseService Stopped
Disabled Own Process
c:\windows\system32\llsdrv.exe
Normal NT AUTHORITY\NetworkService 0
TCP/IP NetBIOS Helper LmHosts Running
Auto Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0

```

```

Messenger Messenger Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvc
Stopped Disabled Own Process
c:\windows\system32\mnmsrvc.exe
Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
Running Auto Own Process
c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 0
SQL Server FullText Search (MSSQLSERVER)
msftesql Running Auto Own Process
"c:\program files\microsoft sql
server\mssql.1\mssql\bin\msftesql.exe" -s:mssql.1 -
f:mssqlserver Normal NT
AUTHORITY\NetworkService 0
Windows Installer MSIServer Stopped Manual
Share Process
c:\windows\system32\msiexec.exe /v
Normal LocalSystem 0
SQL Server (MSSQLSERVER) MSSQLSERVER
Stopped Manual Own Process
"c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlservr.exe" -smssqlserver
Normal NT AUTHORITY\NetworkService 0
SQL Server Active Directory Helper
MSSQLServerADHelper Stopped Disabled Own
Process "c:\program files\microsoft sql
server\90\shared\sqladhip90.exe" Normal NT
AUTHORITY\NetworkService 0
Network DDE NetDDE Stopped Disabled
Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped
Disabled Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Location Awareness (NLA) Nla
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSsp
Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

Office Source Engine ose Stopped
Manual Own Process "c:\program
files (x86)\common files\microsoft shared\source
engine\ose.exe" Normal LocalSystem 0
Plug and Play PlugPlay Running Auto
Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
IPSEC Services PolicyAgent Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Remote Access Auto Connection Manager RasAuto
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Access Connection Manager RasMan
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Desktop Help Session Manager RDSessMgr
Stopped Manual Own Process
c:\windows\system32\sessmgr.exe
Normal LocalSystem 0
Routing and Remote Access RemoteAccess
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Registry RemoteRegistry Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k regsvc
Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running
Auto Share Process
c:\windows\system32\svchost.exe -k rpcss
Normal NT Authority\NetworkService 0
Resultant Set of Policy Provider RSoPProv
Stopped Manual Share Process
c:\windows\system32\rsopprov.exe
Normal LocalSystem 0
Special Administration Console Helper sacsvr
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Smart Card SCardSvr Stopped Manual
Share Process
c:\windows\system32\scardsvr.exe

```

```

Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Secondary Logon seclogon Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
SharedAccess Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Stopped Disabled Own
Process c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
SQL Server Browser SQLBrowser Stopped
Disabled Own Process "c:\program
files (x86)\microsoft sql
server\90\shared\sqlbrowser.exe" Normal NT
AUTHORITY\LocalService 0
SQL Server Agent (MSSQLSERVER)
SQLSERVERAGENT Stopped Manual Own
Process "c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlagent90.exe" -i
mssqlserver Normal LocalSystem 0
SQL Server VSS Writer SQLWriter Running
Auto Own Process "c:\program
files\microsoft sql server\90\shared\sqlwriter.exe"
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0
Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Auto Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0
Telephony Tapisrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Auto Share Process
c:\windows\system32\svchost.exe -k termsvc
Normal LocalSystem 0

```

```

Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0
Distributed Link Tracking Server TrkSvr
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process
c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
Stopped Manual Own Process
c:\windows\system32\wdfmgr.exe
Normal NT AUTHORITY\LocalService 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
Manual Own Process
c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vssvc.exe Normal
LocalSystem 0
Windows Time W32Time Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Portable Media Serial Number Service WmdmPmSN
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

WMI Performance Adapter WmiApSrv Stopped
Manual Own Process
c:\windows\system32\wbem\wmiapsrv.exe
Normal LocalSystem 0
Automatic Updates wuauerv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Wireless Configuration WZCVCV Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Provisioning Service xmlprov Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
[Program Groups]
Group Name Name User Name
Accessories Default User:Accessories
Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Startup Default User:Startup Default User
Accessories All Users:Accessories All
Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
Debugging Tools for Windows 64-bit All
Users:Debugging Tools for Windows 64-bit
All
Users
HP System Tools All Users:HP System Tools All
Users
HP System Tools\HP Array Configuration Utility All
Users:HP System Tools\HP Array Configuration Utility
All Users
Microsoft SQL Server 2005 All Users:Microsoft SQL
Server 2005 All Users
Microsoft SQL Server 2005\Analysis Services All
Users:Microsoft SQL Server 2005\Analysis Services All
Users
Microsoft SQL Server 2005\Configuration Tools All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Microsoft SQL Server 2005\Documentation and Tutorials
All Users:Microsoft SQL Server
2005\Documentation and Tutorials All Users
Microsoft SQL Server 2005\Documentation and
Tutorials\Tutorials All Users:Microsoft SQL Server

```



```

2005\Documentation and Tutorials\Tutorials All
Users
Microsoft SQL Server 2005\Performance Tools All
Users:Microsoft SQL Server 2005\Performance Tools All
Users
Microsoft Visual Studio 2005 All Users:Microsoft
Visual Studio 2005 All Users
Microsoft Visual Studio 2005\Visual Studio Tools All
Users:Microsoft Visual Studio 2005\Visual Studio
Tools All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM
Accessories\Accessibility NT
AUTHORITY\SYSTEM:Accessories\Accessibility NT
AUTHORITY\SYSTEM
Accessories\Entertainment NT
AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM
Accessories VIOLET\Administrator:Accessories
VIOLET\Administrator
Accessories\Accessibility
VIOLET\Administrator:Accessories\Accessibil
ity
VIOLET\Administrator
Accessories\Entertainment
VIOLET\Administrator:Accessories\Entertainm
ent
VIOLET\Administrator
Administrative Tools
VIOLET\Administrator:Administrative Tools
VIOLET\Administrator
Startup VIOLET\Administrator:Startup
VIOLET\Administrator
WMI Tools VIOLET\Administrator:WMI Tools
VIOLET\Administrator

[Startup Programs]

Program Command User Name Location
desktop desktop.ini NT AUTHORITY\SYSTEM
Startup
desktop desktop.ini VIOLET\Administrator
Startup
desktop desktop.ini .DEFAULT Startup
desktop desktop.ini All Users Common
Startup
CFQTEAM c:\program files\hp\ncu\cpqteam.exe All
Users
HKLM\SOFTWARE\Microsoft\Windows\CurrentVers
ion\Run

[OLE Registration]

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available
WordPad Document "%programfiles%\windows
nt\accessories\wordpad.exe"

```

```

Bitmap Image mspaint.exe

[Windows Error Reporting]

Time Type Details

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category ]
[Summary]

Item Value
Version 6.0.3790.3959
Build 63790.3959
Application Path C:\Program Files\Internet
Explorer
Language English (United States)
Active Printer Not Available

Cipher Strength 128-bit
Content Advisor Disabled
IEAK Install No

[File Versions]

File Version Size Date Path
Company
actxprxy.dll 6.0.3790.3959 221 KB
2/16/2007 11:02:52 PM
C:\WINDOWS\system32 Microsoft Corporation
advpack.dll 6.0.3790.3959 146 KB
2/16/2007 11:03:10 PM
C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx 6.0.3790.1830 147 KB
12/19/2005 8:36:05 AM
C:\WINDOWS\system32 Microsoft Corporation
browselc.dll 6.0.3790.1830 63 KB
12/19/2005 8:36:08 AM
C:\WINDOWS\system32 Microsoft Corporation
browseui.dll 6.0.3790.3959 1,568 KB
2/16/2007 11:05:24 PM
C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll 6.0.3790.3959 216 KB
2/16/2007 11:05:40 PM
C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll 5.82.3790.3959 935 KB
2/16/2007 11:09:08 PM
C:\WINDOWS\system32 Microsoft Corporation
dxtrans.dll 6.3.3790.3959 325 KB
2/16/2007 11:18:34 PM

```

```

C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll 6.3.3790.3959 549 KB
2/16/2007 11:18:32 PM
C:\WINDOWS\system32 Microsoft Corporation
iecont.dll <File Missing> Not Available
Not Available Not Available Not
Available
iecontlc.dll <File Missing> Not Available
Not Available Not Available Not
Available
iedkcs32.dll 16.0.3790.3959 417 KB
2/16/2007 11:29:36 PM
C:\WINDOWS\system32 Microsoft Corporation
iepeers.dll 6.0.3790.3959 362 KB
2/16/2007 11:29:38 PM
C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll 6.0.3790.1830 71 KB
12/19/2005 8:37:09 AM
C:\WINDOWS\system32 Microsoft Corporation
ieuinit.inf Not Available 24 KB
12/19/2005 8:37:09 AM
C:\WINDOWS\system32 Not Available
iexplore.exe 6.0.3790.1830 94 KB
12/19/2005 8:37:09 AM C:\Program
Files\Internet Explorer Microsoft Corporation
imgutil.dll 6.0.3790.3959 61 KB
2/16/2007 11:30:36 PM
C:\WINDOWS\system32 Microsoft Corporation
inetcp.cpl 6.0.3790.3959 431 KB
2/16/2007 11:30:40 PM
C:\WINDOWS\system32 Microsoft Corporation
inetcp.cpl 6.0.3790.1830 110 KB
12/19/2005 8:37:15 AM
C:\WINDOWS\system32 Microsoft Corporation
inseng.dll 6.0.3790.3959 147 KB
2/16/2007 11:30:52 PM
C:\WINDOWS\system32 Microsoft Corporation
mlang.dll 6.0.3790.3959 686 KB 2/16/2007
11:36:42 PM C:\WINDOWS\system32 Microsoft
Corporation
msencode.dll <File Missing> Not Available
Not Available Not Available
Available
mshta.exe 6.0.3790.1830 38 KB 12/19/2005
8:37:42 AM C:\WINDOWS\system32 Microsoft
Corporation
mshtml.dll 6.0.3790.3959 5,859 KB
2/16/2007 11:38:38 PM
C:\WINDOWS\system32 Microsoft Corporation
mshtml.tlb 6.0.3790.1830 1,320 KB
12/19/2005 8:37:45 AM

```

```

C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll      6.0.3790.3959      906 KB
                2/16/2007 11:38:42 PM
                C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll      6.0.3790.1830      56 KB
                12/19/2005 8:37:45 AM
                C:\WINDOWS\system32 Microsoft Corporation
msident.dll     6.0.3790.1830      69 KB
                12/19/2005 8:37:47 AM
                C:\WINDOWS\system32 Microsoft Corporation
msidntld.dll    6.0.3790.1830      16 KB
                12/19/2005 8:37:47 AM
                C:\WINDOWS\system32 Microsoft Corporation
msieftpl.dll    6.0.3790.3959      369 KB
                2/16/2007 11:38:50 PM
                C:\WINDOWS\system32 Microsoft Corporation
msrating.dll    6.0.3790.3959      240 KB
                2/16/2007 11:39:20 PM
                C:\WINDOWS\system32 Microsoft Corporation
mstime.dll      6.0.3790.3959      880 KB
                2/16/2007 11:39:26 PM
                C:\WINDOWS\system32 Microsoft Corporation
occache.dll     6.0.3790.3959      126 KB
                2/16/2007 11:41:48 PM
                C:\WINDOWS\system32 Microsoft Corporation
proctexe.ocx    <File Missing>     Not Available
                Not Available     Not Available     Not Available
sendmail.dll    6.0.3790.3959      64 KB
                2/16/2007 11:54:24 PM
                C:\WINDOWS\system32 Microsoft Corporation
shdoclc.dll     6.0.3790.1830      590 KB
                12/19/2005 8:38:45 AM
                C:\WINDOWS\system32 Microsoft Corporation
shdocvw.dll     6.0.3790.3959      2,381 KB
                2/16/2007 11:54:58 PM
                C:\WINDOWS\system32 Microsoft Corporation
shfolder.dll    6.0.3790.1830      34 KB
                12/19/2005 8:38:48 AM
                C:\WINDOWS\system32 Microsoft Corporation
shlwapi.dll    6.0.3790.3959      607 KB
                2/16/2007 11:55:32 PM
                C:\WINDOWS\system32 Microsoft Corporation
tdc.ocx         1.3.0.3130         91 KB      12/19/2005
                8:39:03 AM      C:\WINDOWS\system32 Microsoft
                Corporation
url.dll         6.0.3790.1830      40 KB      12/19/2005
                8:39:13 AM      C:\WINDOWS\system32 Microsoft
                Corporation

```

```

urlmon.dll      6.0.3790.3959      1,063 KB
                2/17/2007 12:00:44 AM
                C:\WINDOWS\system32 Microsoft Corporation
webcheck.dll    6.0.3790.3959      439 KB
                2/17/2007 12:02:26 AM
                C:\WINDOWS\system32 Microsoft Corporation
wininet.dll     6.0.3790.3959      1,163 KB
                2/17/2007 12:02:54 AM
                C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]

Item      Value
Connection Preference      Never dial

LAN Settings

AutoConfigProxy      wininet.dll
AutoProxyDetectMode  Disabled
AutoConfigURL
Proxy      Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category ]
[Summary]

Item      Value
Page Refresh Type      Automatic
Temporary Internet Files Folder      C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space      Not Available
Available Disk Space      Not Available
Maximum Cache Size      Not Available
Available Cache Size      Not Available

[List of Objects]

Program File      Status      CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category ]
[Summary]

Item      Value
Content Advisor      Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
No personal certificate information available

```

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm  
No other people certificate information available

[Publishers]

Name  
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Custom
Trusted sites	Custom
Internet	Custom
Restricted sites	Custom

## Microsoft SQL Server Node Configuration Parameters

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
Server\90\NodeConfiguration  
Class Name: <NO CLASS>  
Last Write Time: 8/23/2007 - 12:38 PM

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
Server\90\NodeConfiguration\Node0  
Class Name: <NO CLASS>  
Last Write Time: 7/30/2007 - 2:21 PM  
Value 0  
Name: CPUMask  
Type: REG\_DWORD  
Data: 0x3

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
Server\90\NodeConfiguration\Node1  
Class Name: <NO CLASS>  
Last Write Time: 7/30/2007 - 2:21 PM  
Value 0  
Name: CPUMask  
Type: REG\_DWORD  
Data: 0xc

Key Name:  
HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
Server\90\NodeConfiguration\Node2  
Class Name: <NO CLASS>

Last Write Time: 7/30/2007 - 2:21 PM  
 Value 0  
 Name: CPUMask  
 Type: REG\_DWORD  
 Data: 0x30

Key Name:  
 HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
 Server\90\NodeConfiguration\Node3  
 Class Name: <NO CLASS>  
 Last Write Time: 7/30/2007 - 2:21 PM  
 Value 0  
 Name: CPUMask  
 Type: REG\_DWORD  
 Data: 0xc0

## Microsoft SQL Server Super Socket Configuration Parameters

Key Name:  
 HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
 Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp  
 Class Name: <NO CLASS>  
 Last Write Time: 6/21/2007 - 11:00 AM  
 Value 0  
 Name: Enabled  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 1  
 Name: ListenOnAllIPs  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 2  
 Name: NoDelay  
 Type: REG\_DWORD  
 Data: 0  
 Value 3  
 Name: KeepAlive  
 Type: REG\_DWORD  
 Data: 0x7530  
 Value 4  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: TCP/IP

Key Name:  
 HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
 Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP1  
 Class Name: <NO CLASS>  
 Last Write Time: 6/28/2007 - 7:53 AM  
 Value 0  
 Name: Enabled  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 1  
 Name: Active  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 2  
 Name: TcpPort  
 Type: REG\_SZ  
 Data: 2001  
 Value 3  
 Name: TcpDynamicPorts  
 Type: REG\_SZ  
 Data:  
 Value 4  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: Specific IP Address  
 Value 5  
 Name: IpAddress  
 Type: REG\_SZ  
 Data: 130.168.206.44

Key Name:  
 HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
 Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP2  
 Class Name: <NO CLASS>  
 Last Write Time: 6/29/2007 - 2:53 PM  
 Value 0  
 Name: Enabled  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 1  
 Name: Active  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 2  
 Name: TcpPort  
 Type: REG\_SZ  
 Data: 2002  
 Value 3  
 Name: TcpDynamicPorts  
 Type: REG\_SZ  
 Data:  
 Value 4  
 Name: DisplayName

Type: REG\_SZ  
 Data: Specific IP Address  
 Value 5  
 Name: IpAddress  
 Type: REG\_SZ  
 Data: 130.169.206.44

Key Name:  
 HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
 Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP3  
 Class Name: <NO CLASS>  
 Last Write Time: 6/29/2007 - 2:53 PM  
 Value 0  
 Name: Enabled  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 1  
 Name: Active  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 2  
 Name: TcpPort  
 Type: REG\_SZ  
 Data: 2003  
 Value 3  
 Name: TcpDynamicPorts  
 Type: REG\_SZ  
 Data:  
 Value 4  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: Specific IP Address  
 Value 5  
 Name: IpAddress  
 Type: REG\_SZ  
 Data: 130.170.206.44

Key Name:  
 HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Microsoft SQL  
 Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP4  
 Class Name: <NO CLASS>  
 Last Write Time: 6/29/2007 - 2:53 PM  
 Value 0  
 Name: Enabled  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 1  
 Name: Active  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 2  
 Name: TcpPort  
 Type: REG\_SZ

```
Data: 2004
Value 3
Name: TcpDynamicPorts
Type: REG_SZ
Data:
Value 4
Name: DisplayName
Type: REG_SZ
Data: Specific IP Address
Value 5
Name: IPAddress
Type: REG_SZ
Data: 130.171.206.44
```

```
Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL
Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP5
Class Name: <NO CLASS>
Last Write Time: 6/21/2007 - 2:12 PM
Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1
Value 1
Name: Active
Type: REG_DWORD
Data: 0x1
Value 2
Name: TcpPort
Type: REG_SZ
Data: 1433
Value 3
Name: TcpDynamicPorts
Type: REG_SZ
Data:
Value 4
Name: DisplayName
Type: REG_SZ
Data: Specific IP Address
Value 5
Name: IPAddress
Type: REG_SZ
Data: 127.0.0.1
```

```
Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL
Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP1
Class Name: <NO CLASS>
Last Write Time: 7/30/2007 - 2:22 PM
Value 0
Name: TcpPort
Type: REG_SZ
```

```
Data:
2001[0x1],2002[0x2],2003[0x4],2004[0x8]
Value 1
Name: TcpDynamicPorts
Type: REG_SZ
Data:
Value 2
Name: DisplayName
Type: REG_SZ
Data: Any IP Address
```

## Microsoft SQL Server 2005 Startup Commands

```
start sqlservr.exe -c -x -T3502 -T8011 -T8012 -T8018
-T8019 -T661 -T8710 -T836 -T834
```

```
Where:
-c Start SQL Server independently of the
Windows NT Service Control Manager
-x Disables the keeping of CPU time and cache-
hit ratio statistics
-T3502-Prints a message to the SQL Server log at the
start and end of each checkpoint
-T8011-Disable diagnostics for resource monitor
-T8012-Disable ring buffer for scheduler
-T8018-Disable exceptions rung buffer
-T8019-Disable stack collection for exception ring
buffer
-T661-Disable ghost writer
-T8710-Disable HP checks.
-T836-Make use of all physical memory
-T834-Large Pages
```

```
File locations:
sqlserver.exe- C:\Program Files\Microsoft SQL
Server\MSSQL.1\MSSQL\Binn
ERRORLOG-C:\Program Files\Microsoft SQL
Server\MSSQL.1\MSSQL\LOG
```

## Microsoft SQL Server Configuration Parameters

```
sp_configure
name          minimum
maximum      config_value run_value
-----
```

```
Ad Hoc Distributed Queries 0
1 0 0
affinity I/O mask -2147483648
2147483647 0 0
affinity mask -2147483648
2147483647 255 255
affinity64 I/O mask -2147483648
2147483647 0 0
affinity64 mask -2147483648
2147483647 0 0
Agent XPs 0
1 0 0
allow updates 0
1 0 0
awe enabled 0
1 0 0
blocked process threshold 0
86400 0 0
c2 audit mode 0
1 0 0
clr enabled 0
1 0 0
common criteria compliance enabled 0
1 0 0
cost threshold for parallelism 0
32767 5 5
cross db ownership chaining 0
1 0 0
cursor threshold -1
2147483647 -1 -1
Database Mail XPs 0
1 0 0
default full-text language 0
2147483647 1033 1033
default language 0
9999 0 0
default trace enabled 0
1 0 0
disallow results from triggers 0
1 0 0
fill factor (%) 0
100 0 0
ft crawl bandwidth (max) 0
32767 100 100
ft crawl bandwidth (min) 0
32767 0 0
ft notify bandwidth (max) 0
32767 100 100
ft notify bandwidth (min) 0
32767 0 0
in-doubt xact resolution 0
2 0 0
index create memory (KB) 704
2147483647 0 0
lightweight pooling 0
1 1 1
locks 5000
2147483647 0 0
max degree of parallelism 0
64 1 1
max full-text crawl range 0
256 4 4
```

```

max server memory (MB) 16
2147483647 61800 61800
max text repl size (B) 0
2147483647 65536 65536
max worker threads 128
32767 900 900
media retention 0
365 0 0
min memory per query (KB) 512
2147483647 2048 2048
min server memory (MB) 0
2147483647 0 0
nested triggers 0
1 1 1
network packet size (B) 512
32767 4096 4096
Ole Automation Procedures 0
1 0 0
open objects 0
2147483647 0 0
PH timeout (s) 1
3600 60 60
precompute rank 0
1 0 0
priority boost 0
1 1 1
query governor cost limit 0
2147483647 0 0
query wait (s) -1
2147483647 -1 -1
recovery interval (min) 0
32767 32767 32767
remote access 0
1 1 1
remote admin connections 0
1 0 0
remote login timeout (s) 0
2147483647 20 20
remote proc trans 0
1 0 0
remote query timeout (s) 0
2147483647 600 600
Replication XPs 0
1 0 0
scan for startup procs 0
1 0 0
server trigger recursion 0
1 1 1
set working set size 0
1 0 0
show advanced options 0
1 1 1
SMO and DMO XPs 0
1 1 1
SQL Mail XPs 0
1 0 0
transform noise words 0
1 0 0
two digit year cutoff 1753
9999 2049 2049
user connections 0
32767 900 900

```

```

user options 16 0
32767 0 0
Web Assistant Procedures 0
1 0 0
xp_cmdshell 0
1 0 0

```

## TPCC Application Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC
Class Name: <NO CLASS>
Last Write Time: 12/6/2007 - 4:07 PM
Value 0
Name: Path
Type: REG_SZ
Data: C:\Inetpub\wwwroot\

Value 1
Name: NumberOfDeliveryThreads
Type: REG_DWORD
Data: 0x14

Value 2
Name: MaxConnections
Type: REG_DWORD
Data: 0x88b8

Value 3
Name: MaxPendingDeliveries
Type: REG_DWORD
Data: 0x7d0

Value 4
Name: DB_Protocol
Type: REG_SZ
Data: ODBC

Value 5
Name: TxnMonitor
Type: REG_SZ
Data: COM

Value 6
Name: DbServer
Type: REG_SZ
Data: violet_ip

Value 7
Name: DbName
Type: REG_SZ
Data: tpcc

Value 8
Name: DbUser
Type: REG_SZ

```

```

Data: sa
Value 9
Name: DbPassword
Type: REG_SZ
Data:
Value 10
Name: COM_SinglePool
Type: REG_SZ
Data: YES
Value 11
Name: CallNoDuplicatesNewOrder
Type: REG_DWORD
Data: 0x1
Value 12
Name: ConnectDelay
Type: REG_DWORD
Data: 0x1

```

## World Wide Web Service Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC
Class Name: <NO CLASS>
Last Write Time: 12/13/2007 - 10:17 AM
Value 0
Name: Type
Type: REG_DWORD
Data: 0x20
Value 1
Name: Start
Type: REG_DWORD
Data: 0x2
Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0x1
Value 3
Name: ImagePath
Type: REG_EXPAND_SZ
Data: %SystemRoot%\System32\svchost.exe
-k iissvcs
Value 4
Name: DisplayName
Type: REG_SZ
Data: World Wide Web Publishing Service
Value 5

```

```

Name: DependOnService
Type: REG_MULTI_SZ
Data: RPCSS
      HTTPFilter
      IISADMIN

Value 6
Name: DependOnGroup
Type: REG_MULTI_SZ
Data:

Value 7
Name: ObjectName
Type: REG_SZ
Data: LocalSystem

Value 8
Name: Description
Type: REG_SZ
Data: Provides Web connectivity and
administration through the Internet Information
Services Manager

Value 9
Name: FailureActions
Type: REG_BINARY
Data: 00000000 80 51 01 00 00 00 00 00 - 00 00 00 00 03
00 00 00 .Q.....
00000010 43 00 4c 00 01 00 00 00 - 01 00 00 00 01
00 00 00 C.L.....
01 00 00 00 01 00 00 00 - 01 00 00 00
.....

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC\Parameters
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 2:01 PM

Value 0
Name: MajorVersion
Type: REG_DWORD
Data: 0x6

Value 1
Name: MinorVersion
Type: REG_DWORD
Data: 0

Value 2
Name: InstallPath
Type: REG_SZ
Data: C:\WINDOWS\system32\inetsrv

Value 3
Name: AccessDeniedMessage
Type: REG_SZ
Data: Error: Access is Denied.

Value 4
Name: ServiceDll
Type: REG_EXPAND_SZ

```

```

Data: C:\WINDOWS\system32\inetsrv\iisw3adm.dll

Value 5
Name: AcceptExOutstanding
Type: REG_DWORD
Data: 0x28

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC\Parameters\ADCLaunch
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 1:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC\Parameters\ADCLaunch\AdvancedDataFactory
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 1:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 1:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC\Performance
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 1:51 PM

Value 0
Name: Library
Type: REG_SZ
Data: C:\WINDOWS\system32\inetsrv\w3ctrs.dll

Value 1
Name: Open
Type: REG_SZ
Data: OpenW3PerformanceData

Value 2
Name: Close
Type: REG_SZ
Data: CloseW3PerformanceData

Value 3
Name: Collect
Type: REG_SZ
Data: CollectW3PerformanceData

Value 4
Name: PerfIniFile
Type: REG_SZ
Data: w3ctrs.ini

Value 5
Name: Last Counter
Type: REG_DWORD
Data: 0xd44

```

```

Value 6
Name: Last Help
Type: REG_DWORD
Data: 0xd45

Value 7
Name: First Counter
Type: REG_DWORD
Data: 0xc4e

Value 8
Name: First Help
Type: REG_DWORD
Data: 0xc4f

Value 9
Name: Object List
Type: REG_SZ
Data: 3150 3324

Value 10
Name: Library Validation Code
Type: REG_BINARY
Data: 00000000 00 27 54 a0 67 fb c5 01 - 00 5e 00 00 00
00 00 00 .'T gũÅ..^.....

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC\Security
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 1:51 PM

Value 0
Name: Security
Type: REG_BINARY
Data: 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00 .....Å.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 ý.....
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....ý...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00 .....
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 ý.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 .....
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 .....
00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
00 14 00 .....
00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 .....
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 ...ý.....
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.....

```

000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12  
00 00 00 .....

Key Name:  
HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\  
W3SVC\Enum  
Class Name: <NO CLASS>  
Last Write Time: 12/13/2007 - 10:17 AM  
Value 0  
Name: 0  
Type: REG\_SZ  
Data: Root\LEGACY\_W3SVC\0000  
  
Value 1  
Name: Count  
Type: REG\_DWORD  
Data: 0x1  
  
Value 2  
Name: NextInstance  
Type: REG\_DWORD  
Data: 0x1

# *Appendix D: 60-Day Space*



TPC-C 60 Day Space Requirements						
Warehouses	22,600				TpmC	252,000
Table	Rows	Data KB	Index KB	Extra 5% KB	8hr Space	Total Space KB
warehouse	22600	2416	104	126		2646
district	226000	25112	152	1,263		26527
customer	678000000	493090912	30764344	26,192,763		550048019
history	678000000	39591248	147936		7,063,359	39739184
new_order	203400000	3624056	8296	181,618		3813970
orders	678000000	22138776	49624		3,949,714	22188400
order_line	6779978210	444588736	1047064		79,317,778	445635800
item	100000	9416	120	477		10013
stock	2260000000	723200000	1523968	36,236,198		760960166
Total		1,726,270,672	33,541,608	62,612,445	90,330,851	1,822,424,725
	MB					
Dynamic Space	494,452	Sum of Data for Order, Orderline and History				
Static Space	1,285,260	Sum of Data+Index+5%-Dynamic Space				
Free Space	na	Total Allocated Spac - ( Dynamic + Static Space)				
Daily Growth	88,214	(Dynamic Space/(W*62.5))*tpmc				
Daily Spread	-	(Free Space -1.5*Daily Growth) Zero Assumed				
60 Day Space MB	6,578,083					
60 Day Space GB	6,423.91					GB
Log Size	941,800.00					MB
KB Per New Order	6.57					KB
8 hr log MB	850,297					MB
8 hr log GB	830.3678					GB
		Disks	Disks	Formatted Size		Space
Space Usage	GB Needed	Measured	Size	Size		Available
180 Day Space DB	6,423.91	600	36GB	33.919		20,351.28
			9GB			-
			4GB			-
Total DB		600.00				20,351.28
8-hr log + mirror	1,660.74	28	72GB	68.366		1,914.26
OS, Swap	3.00	2	9GB			-
Total Storage	<b>8,087.64</b>	GB				<b>22,265.54</b>

The file groups are reported in 8K pages from the sysfile table.

	Misc_fg	cust_fg	Stock_fg	Order_line_fg
	2646			
	26527			
	0	550048019	0	0
	46802543			
	3813970			
	26138114			
				524953578
	10013			
	0		760960166	0
	76,793,813	550,048,019	760,960,166	524,953,578
files=	12	12	12	12
size=	960,000	6,009,600	8,332,800	7,097,600
Total=	11,520,000	72,115,200	99,993,600	85,171,200
8K blocks	92,160,000	576,921,600	799,948,800	681,369,600
Needed =	76,793,813	550,048,019	760,960,166	524,953,578
	OK	OK	OK	OK

tpmC		276,000.00									
	Data Before KB	Index Before KB	Data After KB	Index After KB	Data Grow KB	Index Grow KB	Total Grow KB	KB/New-Order	8-Hr Growth KB	8-Hr Growth MB	
History	39,591,248	147,936	42647800	292800	3,056,552	144,864	3,201,416	0.0660	8,741,968.42	8,537.08	
Order	22,138,776	49,624	27048104	98016	4,909,328	48,392	4,957,720	0.1022	13,537,831.91	13,220.54	
Order-Line	444,588,736	1,047,064	501306944	2071600	56,718,208	1,024,536	57,742,744	1.1902	157,675,617.53	153,980.10	
										175,737.71	
	sum(*) Before		sum(*) After		Num New-Order						
d_next_o_id	678,226,000		726,741,800		48,515,800	176					
	Before MB		After MB		Grow MB			KB/New-Order	8-Hr Growth MB	8-Hr Growth GB	
Log	9032.62		320421.67		311389.05			6.5723	850,296.63	830.37	
Database tpcc log used (%)											
	941800	0.95908099		34.022263				6.730.0773	bytes		

# *Appendix E:* *Third Party Quotes*



**IOGEAR GCS78KIT 8-Port KVM Switch Kit , PS/2, w/KVM Cables - Retail**



**\$199.99**

**3 Business Day Shipping \$10.09**  
(Not available in HI, AK and PR)

In Stock

**ADD TO CART**

**ADD TO WISH LIST**

**EMAIL THIS PAGE**

**PRINT THIS PAGE**

**PRICE ALERT**

**Image Viewer**



**Protect Your Investment**

Select An Optional Extended Warranty Plan

*Extended warranty is not available for items combined with a free gift.*

**Special Offers**



No Payments for 6 Months on purchases over \$500 with your Newegg.com Preferred Account!  
[Click here](#) for important disclosures



No Payments for 90 Days On purchases over \$250 with Bill Me Later®!  
[Click here](#) for important disclosures

**Similar Items**

Not the product you're looking for? We can make some suggestions to help you decide on a product that fits your needs.  
[Click here](#) to view similar products

**MANUFACTURER INFO RETURNS & REBATES**

**Manufacturer Warranty**

Beyond any applicable Newegg return policy, this item is warranted independently by the product's Manufacturer. Below is a summary

**CUSTOMER REVIEWS SPECIFICATIONS**

**Model**

Brand	IOGEAR
Model	GCS78KIT

**Spec**

Type	D-Sub
PC Connectors	8x6 pin mini-DIN Female (PS/2) 8x6 pin mini-DIN Female (PS/2) 8xHDB15 Male
Console Connectors	1xHDB15 Female 1x6 pin mini-DIN Female (PS/2) 1x6 pin mini-DIN Female (PS/2)
Computer Connections	8 Computer Connections
Monitor Connections	1 Monitor Connection
Video Resolution	1920 x 1440
PC Selection	Push Buttons/Hot Keys
AutoScan Interval	5 seconds
Monitors Supported	VGA
Dimensions	1.8" x 6.0" x 17.0"
Weight	7.8 lbs.

**Features**

Power Features	Power Consumption: 1.08W max Power: Voltage: DC 9V Amps: 400 mA(Max)
Features	Includes four 6 ft KVM cables and four 10ft KVM cables Connected computers can be added or removed without disturbing the other computers Easy to install - no software required LEDs allow for easy status monitoring

**Packaging**

Package Contents	1 PS/2 KVM switch, 4 six ft PS/2 KVM cables, 4 ten Power adapter, 1 Rack mount kit,
------------------	---

5 foot Green Category 5E Assembly Style Network Patch Cables ( Cat 5e )(backwards compatible wi - Microsoft Internet Explorer p

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites

Address http://lanadapters.stores.yahoo.net/cblc5enb5gm.html Go Links

HOME

CABLES

CAT 5E 350MHZ  
NON BOOTED NETWORK CABLES  
ON SALE!!!!

CATEGORY 5E NETWORK ENHANCED 350 MHZ CABLE ASSEMBLY STYLE

CATEGORY 5E NETWORK ENHANCED 350 MHZ CABLE  
MOLDED SINGLESS STYLE

CATEGORY 5E NETWORK ENHANCED 350 MHZ CABLE MOLDED STYLE

CATEGORY 5E ENHANCED 350 MHZ SHIELDED  
NETWORK CABLE ASSEMBLY STYLE

CATEGORY 6 NETWORK CABLE SINGLESS MOLDED STYLE

CATEGORY 6 NETWORK CABLE MOLDED STYLE

CATEGORY 6 500MHZ SHIELDED NETWORK CABLE MOLDED STYLE

CATEGORY 5E ENHANCED 350 MHZ CROSSOVER NETWORK CABLE  
MOLDED SINGLESS STYLE

CATEGORY 6 CROSSOVER NETWORK CABLE  
SINGLESS MOLDED STYLE

CATEGORY 6 500MHZ SHIELDED  
CROSSOVER NETWORK CABLE MOLDED STYLE

NETWORK PARTS  
CAT5 CAT5E CAT6

HARDWARE

HOUSEWARES AND TOOLS

MACINTOSH CLEARANCE

NETWORK CABLES & PARTS  
CAT5 CAT5E CAT6

NETWORKING

POWER

PRINT SERVERS

SOFTWARE

WATCHES

WE ARE ANTI SPAM

BLACKLISTED BRANDS

PRINTING SUPPLIES AND CABLES


SCSI

SHOW ORDER

PRIVACY POLICY

INFO &  
SHIPPING NOTES  
& WAYS TO DELAY  
PROCESSING OF ORDER

## LANADAPTERS.COM



### 5 foot Green Category 5E Assembly Style Network Patch Cables ( Cat 5e )(backwards compatible with cat5) 350 MHZ UL&ETL Verified P P P P P P

Cat 5E Green category 5e cat5e LIFETIME WARRANTY (backwards compatible with cat5) 350 MHZ UL&ETL Verified P P P P P P

**Availability:** 5000

cblc5enb5gm Regular price: \$3.00 **Sale price: \$0.98, 50/\$47.00, 100/\$91.00, 200/\$176.00, 400/\$340.00**

Internet

November 19, 2007

Hewlett-Packard Company  
Brean Campbell  
20555 SH 249  
Houston, TX 77070

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-03150	<b>SQL Server 2005 Enterprise x64 Edition</b> <i>Per Processor License</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 4% discount from the retail unit price of \$24,999.</i>	\$23,911	2	\$47,822
P73-01972	<b>Windows Server 2003 R2 Standard Edition</b> <i>Server License Only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 28% discount from the retail unit price of \$999.</i>	\$719	8	\$5,752
P72-01684	<b>Windows Server 2003 R2 Enterprise x64 Edition</b> <i>Server License Only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 42% discount from the retail unit price of \$3,999.</i>	\$2,334	1	\$2,334
127-00012	<b>Visual Studio Standard 2005</b> <i>Full License</i> <i>No Discount Applied</i>	\$250	1	\$250
N/A	<b>Microsoft Problem Resolution Services</b> <i>Professional Support</i> <i>(1 Incident)</i>	\$245	1	\$245

All products are currently orderable through Microsoft's normal distribution channels. A list of Microsoft's resellers can be found at <http://www.microsoft.com/products/info/render.aspx?view=22&type=mpn&content=22/licensing>

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or [jamiere@microsoft.com](mailto:jamiere@microsoft.com).

Reference ID: PCbrca0711190000005817.

Please include this Reference ID in any correspondence regarding this price quote.