

TPC Benchmark™ C
Full Disclosure Report
for
IBM® @server™ xSeries™ 360
using
Microsoft® SQL Server 2000, Enterprise Edition
and
Microsoft Windows® Server 2003, Enterprise Server

TPC-C Version 5.1

Submitted for Review
February 28, 2003



First Edition - February 2003

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESSED OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by IBM for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

In this document, any references made to an IBM licensed program are not intended to state or imply that only IBM's licensed program may be used; any functionally equivalent program may be used.

This publication was produced in the United States. IBM may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change without notice. Consult your local IBM representative for information on products and services available in your area.

© Copyright International Business Machines Corporation 2003. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

U.S. Government Users - Documentation related to restricted rights: Use, duplication, or disclosure is subject to restrictions set forth in GSA ADP Schedule Contract with IBM Corp.

Trademarks

IBM, xSeries, and the e-business logo are trademarks or registered trademarks of International Business Machines Corporation.

The following terms used in this publication are trademarks of other companies as follows: TPC Benchmark, tpmC, and \$/tpmC trademark of Transaction Processing Performance Council; Intel and Pentium are registered trademarks of Intel Corporation; Microsoft, Windows and BenchCraft are trademarks or registered trademarks of Microsoft Corporation. Other company, product, or service names, which may be denoted by two asterisks (**), may be trademarks or service marks of others.

Notes

¹ GHz only measures microprocessor internal clock speed, not application performance. Many factors affect application performance.

² When referring to hard disk capacity, GB, or gigabyte, means one thousand million bytes. Total user-accessible capacity may be less.

Abstract

IBM Corporation conducted the TPC Benchmark™ C on the IBM @server xSeries 360 configured as a client/server system. This report documents the full disclosure information required by the TPC Benchmark™ C Standard Specification, Revision 5.1, including the methodology used to achieve the reported results. All testing fully complied with this revision level.


The software used on the xSeries 360 system includes Microsoft Windows Server 2003 Enterprise Server operating system and Microsoft SQL Server 2000 Enterprise Edition database.

Two standard metrics, transactions per minute-C (tpmC) and price per tpmC (\$/tpmC), are reported as required by the TPC Benchmark C Standard Specification.

The benchmark results are summarized in the following table.

Hardware	Software	Total System Cost	tpmC	\$/tpmC	Total Solution Availability Date
IBM @server xSeries 360	Microsoft SQL Server 2000 Enterprise Edition Microsoft Windows Server 2003 Enterprise Server	\$216,838	50,666.11	\$4.28	April 30, 2003

The results of the benchmark and test methodology used were audited by Bradley J. Askins of InfoSizing, Inc. The auditor's attestation letter is contained in Section 9 of this report.




IBM® @server™ xSeries™360 c/s
with
Microsoft® SQL Server 2000

TPC-C Rev. 5.1

Report Date: Feb. 28, 2003

Total System Cost	TPC-C Throughput	Price/Performance	Availability Date
\$216,838	50,666.11 tpmC	\$4.28 / tpmC	April 30, 2003

Processors	Database Manager	Operating System	Other Software	Number of Users
Server: 4 Intel® Xeon™ MP 1.9GHz Clients: 2 Intel Xeon DP 2.4GHz	Microsoft SQL Server 2000 Enterprise Edition	Microsoft Windows® Server 2003 Enterprise Server	Microsoft Visual C++ 6.0 Win32 Microsoft COM+	40,960

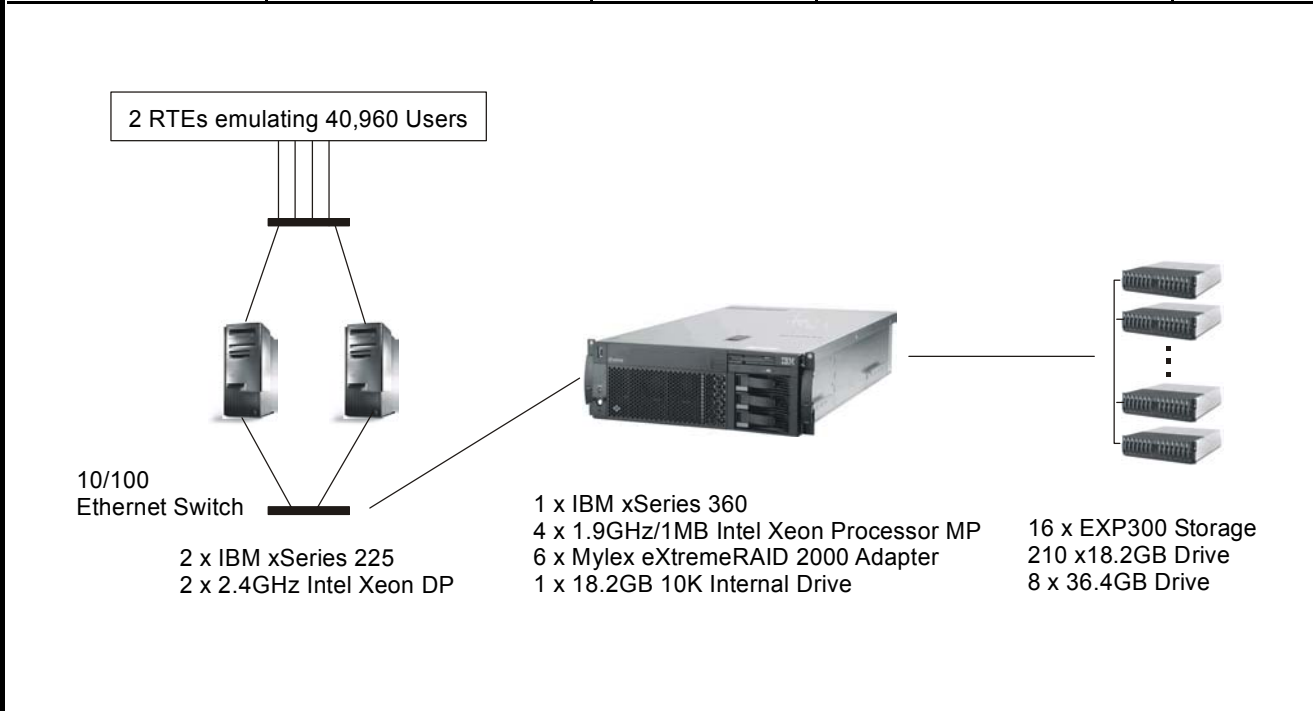

System Component	Qty	Server:	Qty	Each of Two Clients:
Processors / Cache	4	1.9GHz Xeon Processor MP w/1MB L3 Cache	1	2.4GHz Xeon Processor DP w/512KB L2 Cache
Memory	8	1GB ECC SDRAM	4	256MB
Disk Controllers	6	Mylex eXtremeRAID 2000 Adapter	1	Dual-Channel Ultra320 SCSI Interface
Disk Drives	210	18.2GB (10000 rpm)	1	18.2GB (10000 rpm)
Total GB of Storage	8	36.4GB (10000 rpm)		
Tape Drive	1	3843GB 20/40GB SCSI Tape Drive		

IBM Corporation	IBM @server xSeries 360 c/s with Microsoft SQL Server 2000			TPC-C Rev. 5.1			
				Report Date: Feb. 28, 2003			
Description	Order Number	Brand	Third-Party Pricing	Unit Price	Qty	Ext. Price	3-Yr. Maint.*
Server Hardware							
xSeries 360*	8686-8RX	IBM	1	\$11,199	1	\$11,199	
Two 1.9GHz/1MB Xeon MP Processor Embedded 10/100 Ethernet Interface							
ServicePac for 24x7x4	30L9186	IBM					1,495
1GB ECC DDR SDRAM RDIMM	33L3285	IBM	1	685	8	5,480	0
1.9GHz/1MB Xeon Processor MP	59P6816	IBM	1	2,879	2	5,758	0
Mylex eXtremeRAID 2000 Adapter***	08P3834	Mylex	2	1,217	8	9,736	0
18.2GB 10K Ultra160 SCSI Drive	06P5754	IBM	1	275	1	275	0
Netfinity 4.2M Ultra2 SCSI Cable	03K9311	IBM	1	105	19	1,995	0
IBM UPS 500	33L3477	IBM	1	99	1	99	0
E54 15" (13.8" Viewable) Color Monitor*	633147N	IBM	1	139	1	139	90
20/40GB Internal SCSI Tape Drive	00N7991	IBM	1	769	1	769	0
NetBAY11 Rack Cabinet*	9306110	IBM	1	519	1	519	300
NetBAY42 Standard Rack Cabinet*	9306421	IBM	1	1,439	1	1,439	300
Storage Hardware							
EXP300 Rack Storage Enclosure*	35311RU	IBM	1	3,179	16	50,864	3,200
18.2GB 10K Ultra160 SCSI Drive	06P5754	IBM	1	275	210	57,750	0
36.4GB 10K Ultra160 SCSI Drive	06P5755	IBM	1	299	8	2,392	0
Subtotal						\$148,414	\$5,385
Server Software							
Microsoft SQL Server 2000 EE	810-00846	Microsoft	3	16,541	4	\$66,164	\$0
Microsoft Windows Server 2003 ES	N/A	Microsoft	3	2,699	1	2,699	0
Database Server Support Package - 1 Year	PROPRORS16U01	Microsoft	3	1,950	3		5,850
Subtotal						\$68,863	\$5,850
Client Hardware							
xSeries 225 w/2.4GHz/512KB Xeon DP*	8647-3AX	IBM	1	1,269	2	\$2,538	\$1,496
Two 256MB ECC SDRAM RDIMM Embedded Gigabit Ethernet Interface							
256MB ECC SDRAM RDIMM	33L5037	IBM	1	195	4	780	0
18.2GB 10K Ultra160 SCSI Drive	06P5754	IBM	1	275	2	550	0
IBM 10/100 Dual-Port Server Adapter	22P4901	IBM	1	209	4	836	0
E54 15" (13.8" Viewable) Color Monitor*	633147N	IBM	1	139	2	278	180
Subtotal						\$4,982	\$1,676
Client Software							
Microsoft Windows 2000 Server with COM+	C11-00821	Microsoft	3	738	2	1,476	0
Microsoft Visual C++ Professional 6.0 Win32	254-00170	Microsoft	3	109	1	109	0
Subtotal						\$1,585	\$0
Network Components							
10/100 Ethernet 8-Port Switch	FS108NA		2	65	3	195	0
Subtotal						\$195	\$0
See Microsoft quote for discount details.						Total	\$224,039 \$12,911
Large volume discount of 14% on IBM Hardware; prices will vary if purchased separately.							(20,112) \$0
Notes: * The standard 3-year warranties on IBM hardware have been upgraded to 7x24, 4-hour response time coverage. *** 10% or minimum 2 spares are added in place of on-site service (products have a 5-year return-to-vendor-warranty). Pricing: 1 - IBM Corp.; 2 - Computer Giants; 3 - Microsoft Corp. Audited by Bradley J. Askins of InfoSizing, Inc.				Three-Year Cost of Ownership: \$216,838			
				tpmC Rating: 50,666.11			
				\$/tpmC: \$4.28			
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specification. If you find that stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.							

Numerical Quantities Summary			
MQTh, Computed Maximum Qualified Throughput: 50,666.11 tpmC			
Response Times (in seconds)	90th Percentile	Average	Maximum
New-Order	0.73	0.49	5.60
Payment	0.58	0.35	1.78
Order-Status	0.62	0.39	6.81
Delivery (Interactive)	0.47	0.26	1.50
Delivery (Deferred)	0.55	0.37	1.92
Stock-Level	3.23	2.24	5.18
Menu	0.48	0.26	1.69
Response time delay added for emulated components: 0.1 Seconds			
Transaction Mix (in percent of total transactions)			Percent
New-Order			44.86
Payment			43.02
Order-Status			4.03
Delivery			4.05
Stock-Level			4.04
Keying/Think Times (in seconds)	Minimum	Average	Maximum
New-Order	18.00 / 0.00	18.01 / 12.04	18.04 / 120.51
Payment	3.00 / 0.00	3.01 / 12.03	3.04 / 120.51
Order-Status	2.00 / 0.00	2.01 / 10.02	2.03 / 100.51
Delivery	2.00 / 0.00	2.01 / 5.04	2.04 / 50.50
Stock-Level	2.00 / 0.00	2.01 / 5.03	2.03 / 50.51
Test Duration			
Ramp-up time			32 minutes
Measurement interval			120 minutes
Number of checkpoints			4
Checkpoint interval			30 minutes
Number of transactions (all types) completed in measurement interval			14,101,097

Table of Contents

Abstract	3
Numerical Quantities Summary	6
Preface	11
General Items	12
Application Code Disclosure and Definition Statements	12
Benchmark Sponsor	12
Parameter Settings	12
Configuration Diagrams	12
Clause 1: Logical Database Design Related Items	14
Table Definitions	14
Physical Organization of the Database	14
Insert and Delete Operations	14
Horizontal or Vertical Partitioning	14
Replication	14
Table Attributes	14
Clause 2: Transaction and Terminal Profiles Related Items	15
Random Number Generation	15
Screen Layout	15
Terminal Verification	15
Intelligent Terminals	15
Transaction Profiles	15
Deferred Delivery Mechanism	16
Clause 3: Transaction and System Properties Related Items	17
Atomicity Requirements	17
Consistency Requirements	17
Isolation Requirements	18
Durability Requirements	18
Clause 4: Scaling and Database Population Related Items	20
Cardinality of Tables	20
Distribution of Tables and Logs	20
Database Model Implemented	21
Partitions/Replications Mapping	21
60-Day Space Requirement	21
Clause 5: Performance Metrics and Response Time Related Items	22
Measured tpmC	22
Response Times	22
Keying/Think Times	22
Response Time Frequency Distribution Curves	23
Performance Curve for Response Time vs. Throughput	25
New Order Think Time Distribution	26
Throughput vs. Elapsed Time	26
Steady State Methodology	27
Work Performed during Steady State	27
Checkpoints	27
Measurement Interval	27
Transaction Mix	27
Percentage of Total Mix	28
Number of Checkpoints	28
Clause 6: SUT, Driver and Communication Definition Related Items	30
Description of RTE	30
Emulated Components	30
Benchmarked and Targeted System Configuration Diagrams	30
Network Configuration	30

Network Bandwidth	30
Operator Intervention	30
Clause 7: Pricing Related Items	31
Hardware and Software Components	31
Availability Date	31
Measured tpmC	31
Country-Specific Pricing	31
Usage Pricing	31
System Pricing	32
Clause 9: Audit Related Items	33
Auditor	33
Availability of the Full Disclosure Report	33
<i>Attestation letter</i>	34
Appendix A: Source Code	36
<i>client_utils.c</i>	36
<i>client_utils.h</i>	37
<i>dlldata.c</i>	38
<i>error.h</i>	38
<i>install.c</i>	40
<i>install.h</i>	48
<i>install.rc</i>	48
<i>install_com.cpp</i>	51
<i>license.txt</i>	53
<i>mon_client.c</i>	55
<i>mon_client.h</i>	58
<i>readregistry.cpp</i>	58
<i>readregistry.h</i>	59
<i>resource.h</i>	59
<i>resource_tpcc_rc.h</i>	60
<i>rtime.h</i>	60
<i>spinlock.h</i>	60
<i>tpcc.cpp</i>	61
<i>tpcc.def</i>	84
<i>tpcc.h</i>	84
<i>tpcc.rc</i>	86
<i>tpcc_com.cpp</i>	87
<i>tpcc_com.h</i>	88
<i>tpcc_com_all.dsp</i>	89
<i>tpcc_com_ps.def</i>	91
<i>tpcc_com_ps.h</i>	91
<i>tpcc_com_ps.idl</i>	93
<i>tpcc_com_ps_i.c</i>	94
<i>tpcc_com_ps_p.c</i>	95
<i>tpcc_dblib.cpp</i>	115
<i>tpcc_dblib.h</i>	125
<i>tpcc_enc.cpp</i>	126
<i>tpcc_enc.h</i>	127
<i>tpcc_odbc.cpp</i>	128
<i>tpcc_odbc.h</i>	136
<i>tpcc_tux.cpp</i>	138
<i>tpcc_tux.h</i>	140
<i>trans.h</i>	141
<i>tuxapp.cpp</i>	142
<i>tuxapp.h</i>	146
<i>tuxmain.c</i>	146

<i>txn_base.h</i>	147
<i>txnlog.h</i>	147
<i>webclnt.dsp</i>	150
<i>webclnt.dsw</i>	151
Stored Procedures	152
<i>neword.sql</i>	152
<i>payment.sql</i>	155
<i>ordstat.sql</i>	156
<i>delivery.sql</i>	157
<i>stocklev.sql</i>	158
<i>version.sql</i>	158
<i>null-txn.sql</i>	159
Appendix B: Database Design	163
Database Build	163
<i>backup.sql</i>	163
<i>backupdev.sql</i>	163
<i>createdb.sql</i>	163
<i>dbopt1.sql</i>	164
<i>dbopt2.sql</i>	164
<i>idxcuscl.sql</i>	164
<i>idxcusnc.sql</i>	165
<i>idxdiscl.sql</i>	165
<i>idxitmcl.sql</i>	165
<i>idxnodcl.sql</i>	165
<i>idxodlcl.sql</i>	165
<i>idxordcl.sql</i>	166
<i>idxordnc.sql</i>	166
<i>idxstkcl.sql</i>	166
<i>idxwarcl.sql</i>	166
<i>removedb.sql</i>	167
<i>restore.sql</i>	167
<i>runsqlcfg.sql</i>	167
<i>sqlshutdown.sql</i>	167
<i>tables.sql</i>	167
<i>verify_tpccLoad.sql</i>	169
<i>version.sql</i>	170
Load Source Code	170
<i>getargs.c</i>	170
<i>random.c</i>	172
<i>strings.c</i>	173
<i>time.c</i>	176
<i>tpcc.h</i>	176
<i>tpccldr.c</i>	177
<i>tpccldr.mak</i>	201
Appendix C: Tunable Parameters	205
Microsoft Windows Server 2003 Enterprise Server	205
Microsoft SQL Server 2000 Startup Parameters	230
Microsoft SQL Server 2000 Configuration Parameters	230
Disk Controller Configuration Parameters	231
<i>Mylex eXtremeRAID 2000 Controller 0</i>	231
<i>Mylex eXtremeRAID 2000 Controller 1</i>	232
<i>Mylex eXtremeRAID 2000 Controller 2</i>	235
<i>Mylex eXtremeRAID 2000 Controller 3</i>	237
<i>Mylex eXtremeRAID 2000 Controller 4</i>	239
<i>Mylex eXtremeRAID 2000 Controller 5</i>	241

Microsoft Windows 2000 Server	243
<i>System Information Report for Client 1</i>	244
<i>Client Configuration Parameters</i>	264
RTE Input Parameters	265
Appendix D: 60-Day Space	274
Appendix E: Third-Party Quotations	275

Preface

The TPC Benchmark™ C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specification Version 5.1.

The TPC describes this benchmark in Clause 0.1 of the specification as follows:

TPC Benchmark C is an On Line Transaction Processing (OLTP) workload. It is a mixture of read-only and update-intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a “business throughput” measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

General Items

Benchmark Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by International Business Machines Corporation.

Application Code Disclosure and Definition Statements

The application program (as defined in Clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input and output functions.

Appendix A contains all source code implemented in this benchmark.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options that have been changed from the defaults found in actual products, including but not limited to:

- *Database tuning options*
- *Recovery/commit options*
- *Consistency/locking options*
- *Operating system and application configuration parameters.*
- *Compilation and linkage options and run-time optimizations used to create/install applications, OS, and/or databases.*

This requirement can be satisfied by providing a full list of all parameters and options.

Appendix C contains the tunable parameters for the database, the operating system, and the transaction monitor.

Configuration Diagrams


Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagrams for the tested and priced systems are provided on the following pages.

The Remote Terminal Emulator (RTE) used for these TPC Benchmark C tests is the Microsoft BenchCraft RTE. Under Version 5.1, the components of the configuration being emulated by the RTE are the workstations and the Ethernet hubs. Appendix C contains a listing of the RTE scripts and inputs used in the benchmark testing.

The measured configuration used two IBM xSeries 225 systems, each configured with one 2.4GHz Xeon DP processor, as clients, which executed the terminal I/O and submitted transactions to COM+ servers, which were also running on the clients. These COM+ servers forwarded the transaction requests to the server, and returned the results to the RTE. Microsoft SQL Server 2000 Enterprise Edition was the DBMS executing on the server.

Measured and Priced Configurations

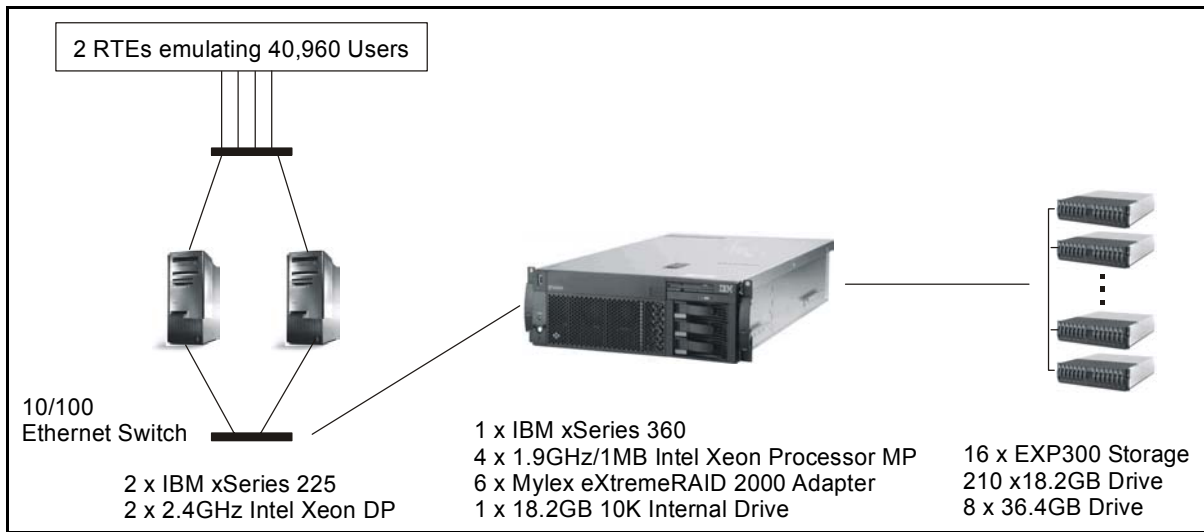

The measured and priced configurations were identical.

Clause 1: Logical Database Design Related Items

Table Definitions

Listings must be provided for all table definition statements and all other statements used to set up the database. Appendix B contains the code used to define and load the database tables.

Physical Organization of the Database

The physical organization of tables and indexes within the database must be disclosed. Physical space was allocated to Microsoft SQL Server on the server disks as detailed in Figure 4-2.

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restriction in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the maximum key value for these new rows.

All insert and delete functions were fully operational during the running of the benchmark. The space required for an additional 5 percent of the initial table cardinality was allocated to Microsoft SQL Server 2000 and priced as static space.

Horizontal or Vertical Partitioning

While there are few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark (see Clause 1.6), any such partitioning must be disclosed. Partitioning was not used in this benchmark.

Replication

Replication tables, if used, must be disclosed (see Clause 1.4.6). Replication was not used in this benchmark.

Table Attributes

Additional and/or duplicated attributes in any table must be disclosed, along with a statement on the impact on performance (see Clause 1.4.7). No additional attributes were used in this benchmark.

Clause 2: Transaction and Terminal Profiles Related Items

Random Number Generation

The method of verification for the random number generation must be disclosed.

The seeds and offsets for the random number generator were collected and verified to be different for each driver. The auditor selected samples of the generated numbers from the database. The samples were verified to have no discernible patterns.

Screen Layout

The actual layouts of the terminal input/out screens must be disclosed.

All screen layouts followed the TPC Benchmark C Standard Specification.

Terminal Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used must for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The auditor verified terminal features by direct experimentation. The benchmarked configuration uses Microsoft Internet Explorer 5.0 and HTML scripts as the terminal interface.

Intelligent Terminals

Any usage of presentation managers or intelligent terminals must be explained.

The terminals emulated in the priced configuration are IBM PC desktop computer systems. All processing of the input/output screens was handled by the xSeries 225 clients. The screen input/output was managed via HTML strings that comply with the HTML Version 2.0 specification. A listing of the code used to implement the intelligent terminals is provided in Appendix A. All data manipulation was handled by the xSeries 360 database server.

Transaction Profiles

The percentage of home and remote order-lines in the New-Order transactions must be disclosed.

The percentage of New-Order transactions that were rolled back as a result of an unused item number must be disclosed.

The number of items per orders entered by New-Order transactions must be disclosed. The percentage of home and remote Payment transactions must be disclosed. The percentage of Payment and Order-Status transactions that used non-primary key (C_LAST) access to the database must be disclosed.

The percentage of Delivery transactions that were skipped as a result of an insufficient number of rows in the NEW-ORDER table must be disclosed.

The mix (i.e., percentages) of transaction types seen by the SUT must be disclosed.

Table 2-1. Transaction Statistics

New Order	Value (%)
Home warehouse order lines	99.00
Remote warehouse order lines	1.00
Rolled back transactions	1.00
Average number of items per order	10.00
Payment	
Home warehouse payment transactions	85.06
Remote warehouse payment transactions	14.94
Non-Primary Key Access	
Payment transactions using C_LAST	60.00
Order-Status transactions using C_LAST	60.11
Delivery	
Delivery transactions skipped	0
Transaction Mix	
New-Order	44.86
Payment	43.02
Delivery	4.05
Stock-Level	4.04
Order-Status	4.03

Deferred Delivery Mechanism

The queuing mechanism used to defer execution of the Delivery transaction must be disclosed.

The deferred delivery operation is queued by making an entry in an array within the application process (tpcc.dll) running on the client. Background threads within the application asynchronously process the queued delivery transactions.

The source code is listed in Appendix A.

Clause 3: Transaction and System Properties Related Items

The results of the ACID test must be disclosed, along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

Atomicity Requirements

The system under test must guarantee that database transactions are atomic; the system will either perform all individual operations on the data, or will assure that no partially completed operations leave any effects on the data.

All ACID tests were conducted according to specification.

Completed Transactions

The following steps were performed to verify the Atomicity of completed transactions.

1. The balance was retrieved from the CUSTOMER table for a random Customer, District and Warehouse, giving BALANCE_1.
2. The Payment transaction was executed for the Customer, District and Warehouse used in step 1.
3. The balance was retrieved again for the Customer used in step 1 and step 2, giving BALANCE_2. It was verified that BALANCE_1 was greater than BALANCE_2 by AMT.

Aborted Transactions

The following steps were performed to verify the Atomicity of the aborted Payment transaction:

1. The Payment application code was changed to execute a rollback of the transaction instead of performing the commit.
2. Using the balance, BALANCE_2, from the CUSTOMER table retrieved for the completed transaction, the Payment transaction was executed for the Customer, District and Warehouse used in step 1 of section 3.1.1. The transaction rolled back due to the change in the application code from step 1.
3. The balance was retrieved again for the Customer used for step 2, giving BALANCE_3. It was verified that BALANCE_2 was equal to BALANCE_3.

Consistency Requirements

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a bat file to issue queries to the database. The results of the queries demonstrated that the database was consistent for all four tests.

Isolation Requirements

Sufficient conditions must be enabled at either the system or the application level to ensure that the required isolation defined in Clause 3.4.1 is obtained.

Isolation tests one through seven were run using the bat files to issue queries to the database. Each file included timestamps to demonstrate the concurrency of operations. The results of the queries were captured and placed in files. The auditor reviewed the results and verified that the isolation requirements had been met.

In addition, the phantom tests and the stock-level tests were run and verified.

Case A was followed for Isolation test seven.

Durability Requirements

The tested system must guarantee durability: the ability to preserve the effects of committed transactions and ensure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

- *Permanent irrecoverable failure of any single durable medium containing TPC-C database tables or recovery log data (this test includes failure of all or part of memory)*
- *Instantaneous interruption (system crash/system hang) in processing that requires system reboot to recover*
- *Failure of all or part of memory (loss of contents)*

Loss of Data Test

The following steps were successfully performed to pass the Durability test of failure of a disk unit with database tables:

1. The contents of the database were backed up to several database dump devices during the initial database load. There were no dump devices on the disk array from which a drive was removed as part of this test.
2. The current count of the total number of orders was determined by the sum of D_NEXT_O_ID for all rows in the district table giving SUM1.
3. A test was started with 10 percent of the total users submitting transactions.
4. A disk containing a portion of each of the tables in the tpcc database was removed causing SQL Server to report errors accessing that device.
5. The run was aborted and SQL Server was restarted. Upon restart, the database tpcc reported numerous errors relating to the failed database device.
6. The transaction log was dumped to disk and the failed disk was replaced with a spare disk and was recovered.
7. The database was recovered and restored from the backup dump devices. Afterwards, the transaction log was applied to the database.
8. Step 2 was repeated to obtain the current count of the total number of orders giving SUM2.
9. It was verified that the sum of D_NEXT_O_ID after the database is recovered is greater than or equal to the sum of D_NEXT_O_ID before the run, plus all new order transactions completed during the run minus any rollback transactions.
10. Consistency Condition 3 was verified.

Combined Loss of Log and Loss of System Test (Instantaneous Interruption and Loss of Memory)

1. The current count of the total number of orders was determined by the sum of D_NEXT_O_ID for all rows in the district table giving SUM1.
2. The test started with a full load with all users submitting transactions. A checkpoint was issued, and the system continued to run for another 5 minutes.
3. One of the log disk drives was removed. Since the log disk was mirrored, SQL Server continued to process transactions without interruption.
4. The test continued for another 3 minutes.
5. The server under test was powered off, which removed power from the system and the memory.
6. The server was powered on again.
7. SQL Server was started to initiate automatic recovery from its log.
8. Step 1 was repeated to obtain the current count of the total number of orders giving SUM2.
9. It was verified that the sum of D_NEXT_O_ID after the database is recovered is greater than or equal to the sum of D_NEXT_O_ID before the run, plus all new order transactions completed during the run minus any rollback transactions.

Clause 4: Scaling and Database Population Related Items

Cardinality of Tables

The cardinality (e.g., the number of rows) of each table, as it existed at the start of the benchmark run (see Clause 4.2), must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted (see Clause 4.2.2), the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

The database was built with 4,096 warehouses and the audited run used all 4,096 warehouses.

Table 4-1. Initial Cardinality of Tables

Table Name	Rows
Warehouse	4,096
District	40,960
Item	100,000
New Order	36,864,000
History	122,880,000
Orders	122,880,000
Customer	122,880,000
Order Line	1,228,800,741
Stock	409,600,000
Inactive Warehouses	0

Distribution of Tables and Logs

The distribution of tables and logs across all media must be explicitly depicted for the tested and priced systems.)

Figure 4-2 depicts the database configuration of the tested system to meet the 8-hour steady state requirement.

Figure 4-2. Data Distribution for the Benchmarked Configuration

Controller	Drives	Partition	Size	Use
0	8 - 36.4GB	E:	120000MB	Logfile
1	49 - 18.2GB	G: Y:	75000MB 200000MB (NTFS)	Customer and Stock Backup 1 of 2
2	35 - 18.2GB	H:	55000MB	Customer and Stock
3	49 - 18.2GB	I: Z:	75000MB 200000MB (NTFS)	Customer and Stock Backup 2 of 2
4	35 - 18.2GB	J:	55000MB	Customer and Stock
5	42 - 18.2GB	F:	130000MB	Miscellaneous

Database Model Implemented

A statement must be provided that describes:

- 1. The database model implemented by the DBMS used (e.g., relational, network, hierarchical)*
- 2. The database interface (e.g., embedded, call level) and access language (e.g., SQL, DL/I, COBOL, read/write) used to implement the TPC-C transactions. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2000 Enterprise Edition is a relational database. The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code using the Microsoft ODBC interface.

Partitions/Replications Mapping

The mapping of database partitions/replications must be explicitly described.

The database was neither partitioned nor replicated.

60-Day Space Requirement

Details of the 60-day space computations, along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed (see Clause 4.2.3).

See Appendix D for details about how the 60-day space requirements were calculated.

Clause 5: Performance Metrics and Response Time Related Items

Measured tpmC

Measured tpmC must be reported.

Measured tpmC: 50,666.11 tpmC

Price per tpmC: \$4.28 per tpmC

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the Menu response time.

The TPC-C requirements for the average response time and the 90th percentile were met. Table 5-1 provides the response times for each of the transaction types and the menu for the measured system.

Table 5-1. Response Times in Seconds

Transaction Type	Average	Maximum	90 %-tile
New-Order	0.49	5.60	0.73
Payment	0.35	1.78	0.58
Delivery	0.26	1.50	0.47
Stock Level	2.24	5.18	3.23
Order Status	0.39	6.81	0.62
Delivery (Deferred)	0.37	1.92	0.55
Menu	0.26	1.69	0.48

Keying/Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.)

Table 5-2 lists the keying/think times for the measured system.

Table 5-2. Keying/Think Times

Transaction Type	Average	Minimum	Maximum
New-Order	18.01 / 12.04	18.00 / 0.00	18.04 / 120.51
Payment	3.01 / 12.03	3.00 / 0.00	3.04 / 120.51
Delivery	2.01 / 5.04	2.00 / 0.00	2.04 / 50.50
Stock Level	2.01 / 5.03	2.00 / 0.00	2.03 / 50.51
Order Status	2.01 / 10.02	2.00 / 0.00	2.03 / 100.51

Response Time Frequency Distribution Curves

Response time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

Figure 5-1. New-Order Transaction - Response Time Frequency Distribution

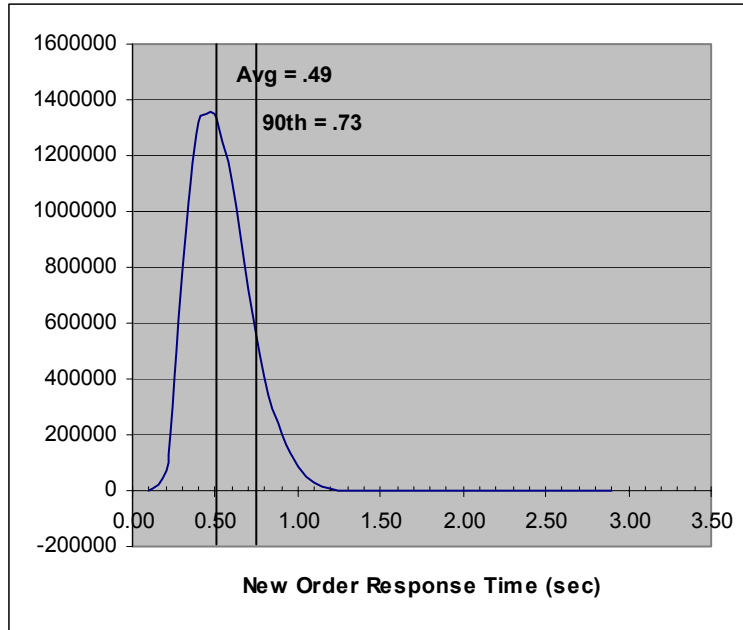


Figure 5-2. Payment Transaction - Response Time Frequency Distribution

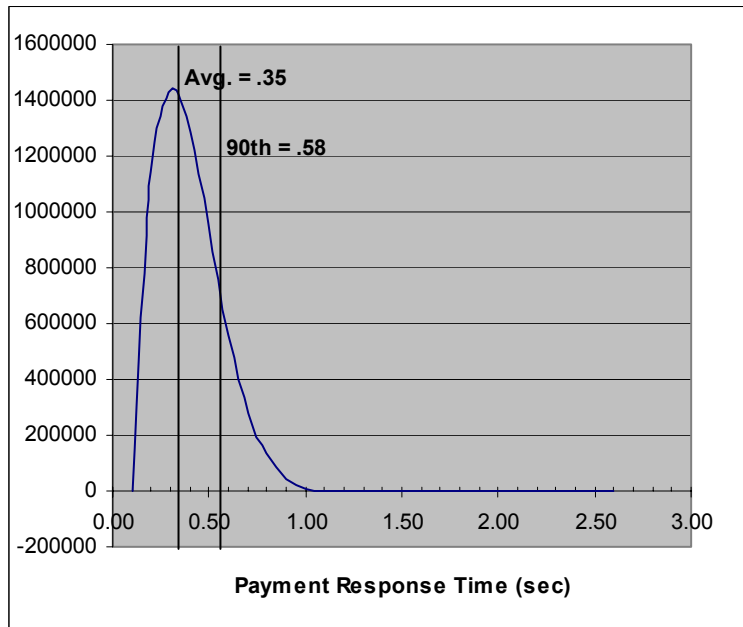


Figure 5-3. Order-Status Transaction - Response Time Frequency Distribution

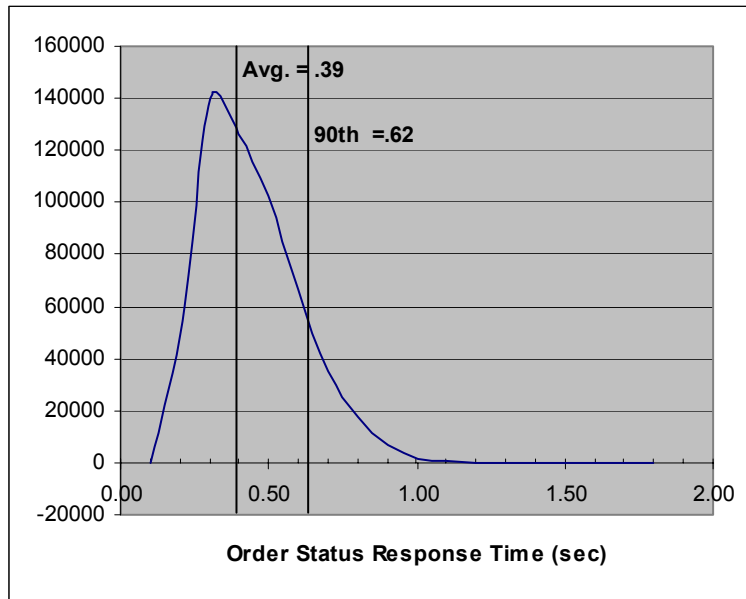


Figure 5-4. Delivery Transaction - Response Time Frequency Distribution


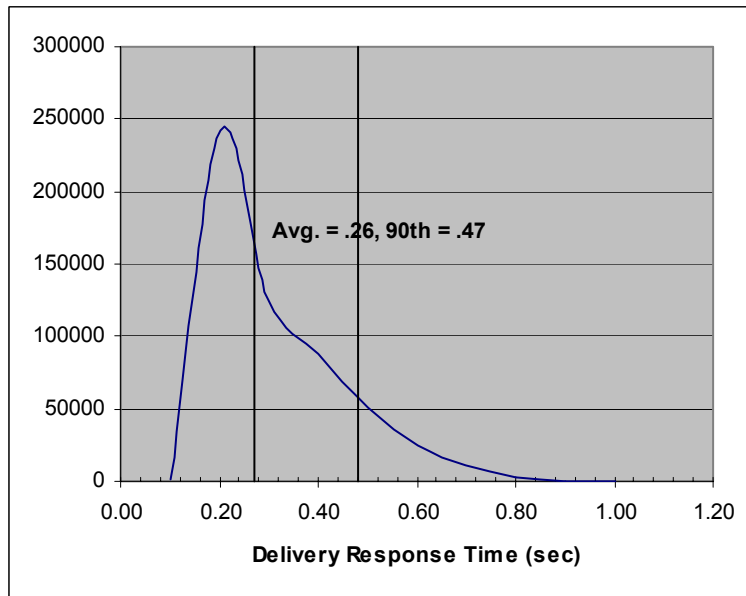



Figure 5-5. Stock-Level Transaction - Response Time Frequency Distribution

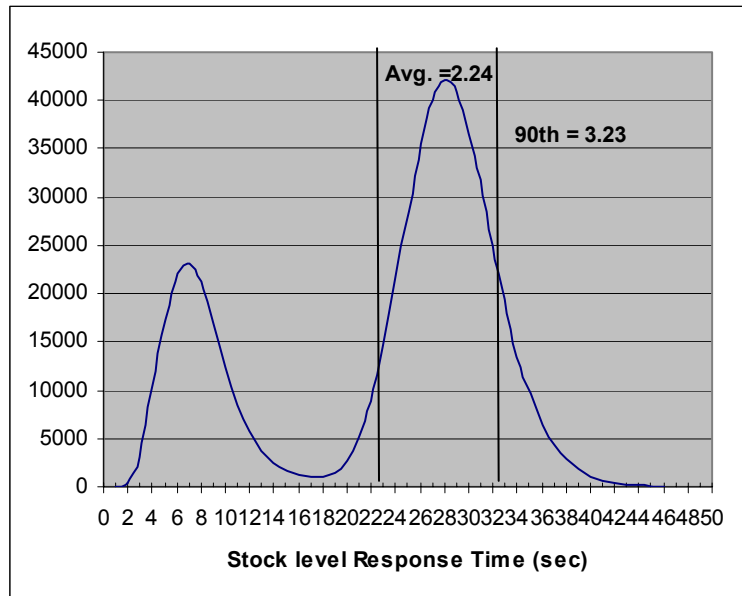

Performance Curve for Response Time vs. Throughput


The performance curve for response time vs. throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

Figure 5-6. New-Order Response Time vs. Throughput

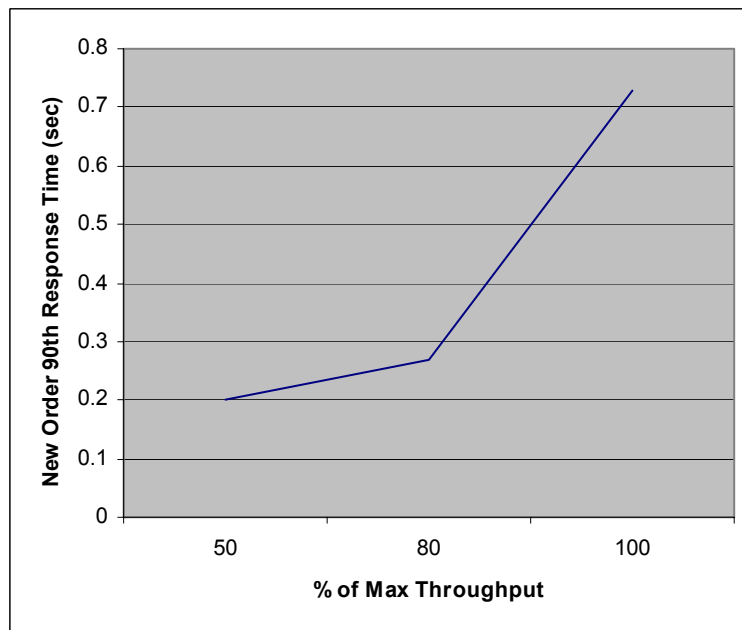

New Order Think Time Distribution


Figure 5-7. New-Order Think Time Distribution

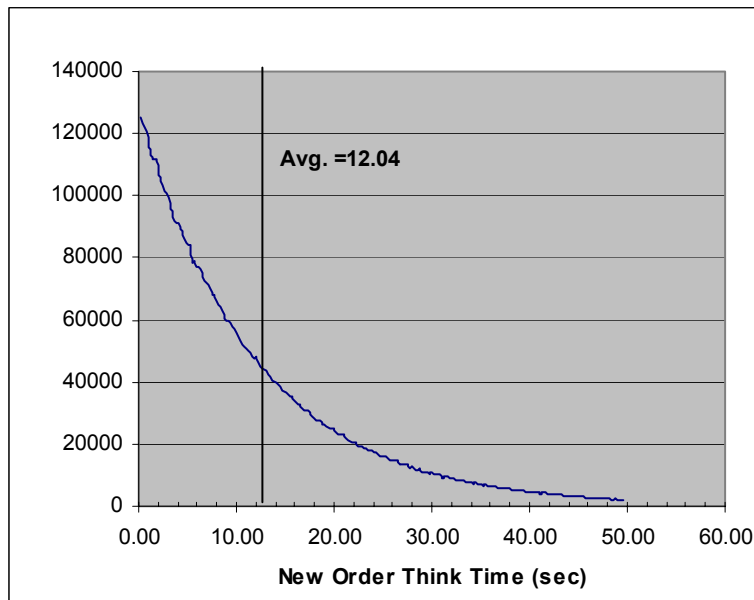

Throughput vs. Elapsed Time

A graph of throughput vs. elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 5-8. New-Order Throughput vs. Elapsed Time

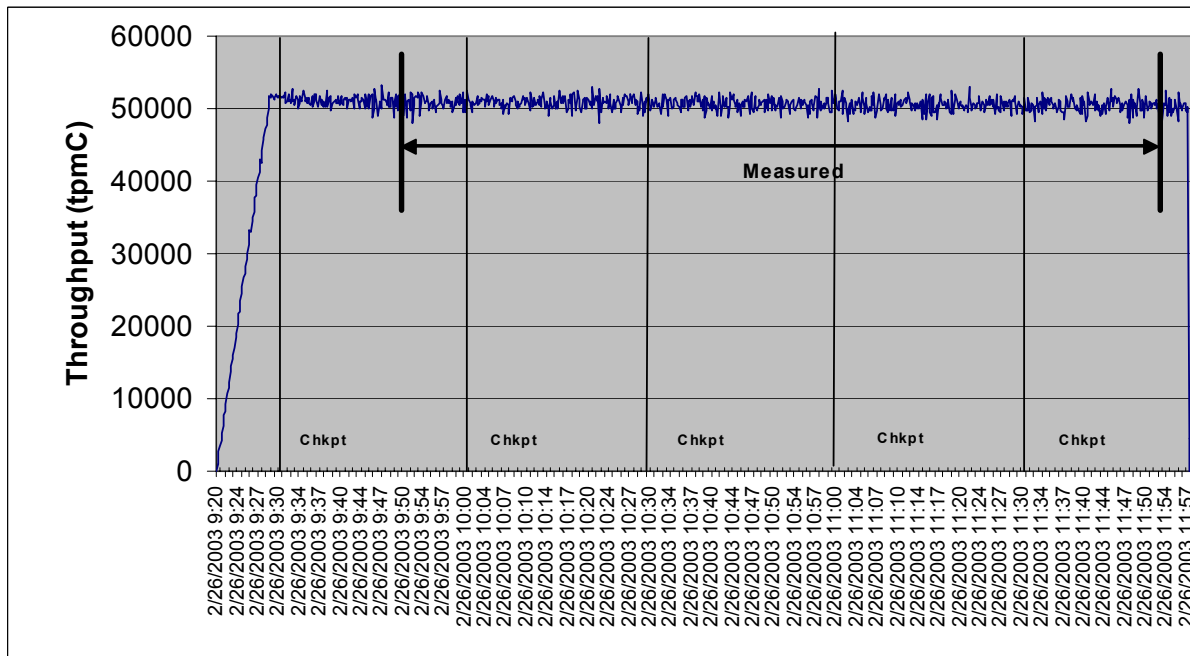

Steady State Methodology

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval (see Clause 5.5) must be described.

Figure 5-8 shows that the system was in steady state at the beginning of the measurement interval.

Work Performed during Steady State

A description of how the work normally performed during a sustained test (e.g., checkpointing, writing redo/undo log records) actually occurred during the measurement interval must be reported.

Transaction Flow

The RTE generated the required input data to choose a transaction from the menu. This data was time-stamped. The response for the requested transaction was verified and time-stamped in the RTE log files.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was time-stamped. The return of the screen with the required response data was time-stamped. The difference between these two time-stamps was the response time for that transaction and was logged in the RTE log. The RTE then waited the required think time interval before repeating the process starting at selecting another transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over a 10/100 Ethernet LAN using Microsoft SQL Server ODBC library and RPC calls.

Checkpoints

Checkpoints were executed on the server during the ramp-up phase and at 30-minute intervals. The measured run contained four checkpoints. SQL Server was started with trace flag 3502, which caused it to log the occurrence of the checkpoint. This information was used to verify that the checkpoints occurred at the appropriate times during the test run.

During a checkpoint, SQL Server flushes all dirty pages from its cache to disk. It places a record in the database transaction log indicating that the checkpoint has completed and that all transactions, which were committed prior to the checkpoint have been written to disk.

Measurement Interval

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The measurement interval was 120 minutes.

Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed. (8.1.6.13)

See Table 5-3.

The RTE was given a weighted random distribution, which was not adjusted during the run.

Percentage of Total Mix

The percentage of the total mix for each transaction type must be disclosed.

See Table 5-3.

Table 5-3. Transaction Statistics and Transaction Mix

New Order	Value (%)
Home warehouse order lines	99.00
Remote warehouse order lines	1.00
Rolled back transactions	1.00
Average number of items per order	10.00
Payment	
Home warehouse payment transactions	85.06
Remote warehouse payment transactions	14.94
Non-Primary Key Access	
Payment transactions using C_LAST	60.00
Order-Status transactions using C_LAST	60.11
Delivery	
Delivery transactions skipped	0
Transaction Mix	
New-Order	44.86
Payment	43.02
Delivery	4.05
Stock Level	4.04
Order-Status	4.03

Number of Checkpoints

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

Checkpoints were performed during the ramp-up period and during each measured run interval. The first measurement interval checkpoint started 7 minutes and 47 seconds after the start of the measurement interval. The four checkpoints in the measured interval are shown in Table 5-4.

Table 5-4. Checkpoint Start Time and Duration

Checkpoint	Start Time	Duration
1	10:00:23	20 minutes 39 Seconds
2	10:30:21	21 minutes 52 Seconds
3	11:00:19	20 minutes 0 Seconds
4	11:30:17	20 minutes 55 Seconds

The checkpoint interval was 30 minutes.

Clause 6: SUT, Driver and Communication Definition Related Items

Description of RTE

The RTE input parameters, code fragments, functions, etc., used to generate each transaction input field must be disclosed.

The RTE used was Microsoft BenchCraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE input is listed in Appendix C.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to that of the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

No components were emulated.

Benchmarked and Targeted System Configuration Diagrams

A complete functional diagram of both the benchmarked configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all software and hardware functionality being performed on the Driver System, and its interface to the SUT must be disclosed (see Clause 6.6.3.6).

The driver RTE generated the transaction input data and transmitted it to the client in HTML format. The driver RTE received the output from the System under Test, time-stamped it, and forwarded it to the Master RTE for post-test processing. No other functionality was included on the driver RTE.

Detailed diagrams of the benchmarked and priced configurations are provided in the section called “General Items” at the beginning of this document.

Network Configuration

The network configurations of both the tested services and the proposed (target) services which are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed (see Clause 6.6.4).

See the measured and priced configuration diagrams for details about the network configuration.

Network Bandwidth

The bandwidth of the network(s) used in the tested/priced configuration must be disclosed.

The 10Mbps Ethernet LAN used to connect the clients and driver RTEs complies with the IEEE.802.3 standard. A 10/100 Ethernet switch was used to connect the clients to the server.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

The configuration did not require any operator intervention to sustain the reported throughput.

Clause 7: Pricing Related Items

Hardware and Software Components

A detailed list of the hardware and software used in the priced system must be reported. Each separately orderable item must have a vendor part number, description and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed.

Pricing source(s) and effective date(s) must also be reported.

The total 3-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

A detailed list of all hardware and software, including the 3-year price, is provided in the Executive Summary at the front of this report. All third-party quotations are included in Appendix E at the end of this document.

Availability Date

The committed delivery date for general availability (availability date) of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the reported availability for the priced system must be the date at which all components are committed to be available.

The priced configuration is planned to be available April 30, 2003.

Measured tpmC

A statement of the measured tpmC, as well as the respective calculations for the 3-year pricing, price/performance (price/tpmC) and the availability date must be included.

- ◆ Maximum Qualified Throughput: 50,666.11 tpmC
- ◆ Price per tpmC: \$4.28 tpmC
- ◆ Three-year cost of ownership: \$216,838

Country-Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country-specific priced configuration. Country-specific pricing is subject to Clause 7.1.7.

The configuration is priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- *Usage level at which the component was priced.*
- *A statement of the company policy allowing such pricing.*

The component pricing based on usage is shown below:

- 1 Microsoft Windows Server 2003 Enterprise Server
- 2 Microsoft Windows 2000 Server
- 4 Microsoft SQL Server 2000 Enterprise Edition (based on per-processor price)

- 3-year support for hardware components (except for components for which 10 percent spares are provided)

System Pricing

System pricing should include subtotals for the following components: Server Hardware, Server Software, Client Hardware, Client Software, and Network Components used for terminal connection (see Clause 7.2.2.3). System pricing must include line item indication where non-sponsoring companies' brands are used. System pricing must also include line item indication of third-party pricing.

A detailed list of all hardware and software, including the 3-year price, is provided in the Executive Summary at the front of this report. All third-party quotations are included in Appendix E at the end of this document.

Clause 9: Audit Related Items

Auditor

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

This implementation of the TPC-C benchmark was audited by Bradley J. Askins of InfoSizing, Inc. The auditor's attestation letter is provided in this section.

Availability of the Full Disclosure Report

The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC BenchmarkTMC," the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

The TPC Benchmark C Full Disclosure Report is available at www.tpc.org.

Benchmark Sponsor: William D. Hall
 Manager, xSeries Performance
 IBM Systems Group
 3039 Cornwallis Road
 Research Triangle Park, NC 27709

February 27, 2003

I verified the TPC Benchmark™ C performance for the following Client/Server configuration:

Platform: **IBM @server xSeries 360 c/s**
 Operating system: **Microsoft Windows Server 2003 Enterprise Server**
 Database Manager: **Microsoft SQL Server 2000 Enterprise Edition**
 Transaction Manager: **Microsoft COM+**

The results were:

CPU's Speed	Memory	Disks	NewOrder 90% Response Time	tpmC
Server: IBM @server xSeries 360				
4 x Xeon MP (1.9GHz)	8 GB Main (2 MB L3 Cache per processor)	210 x 18.2 GB 8 x 36.4 GB	0.64 Seconds	50,666.11
Clients: Two (2) IBM @server xSeries 225 (Specification for each)				
1 x Xeon DP (2.4 GHz)	1 GB Main (512 KB L2 Cache per processor)	1 x 18.2 GB	n/a	n/a

In my opinion, these performance results were produced in compliance with the TPC's requirements for the benchmark. The following verification items were given special attention:

- The database records were the proper size

- The database was properly scaled and populated
- The required ACID properties were met
- The transactions were correctly implemented
- Input data was generated according to the specified percentages
- The transaction cycle times included the required keying and think times
- The reported response times were correctly measured.
- All 90% response times were under the specified maximums
- At least 90% of all delivery transactions met the 80 Second completion time limit
- The reported measurement interval was 120 minutes (7200 seconds)
- The reported measurement interval was representative of steady state conditions
- Four checkpoints were taken during the reported measurement interval
- The 60 day storage requirement was correctly computed
- The system pricing was verified for major components and maintenance

Additional Audit Notes:

None.

Respectfully Yours,



François Raab, President



Bradley J. Askins, Auditor

Appendix A: Source Code

client_utils.c

```
/* client_utils.c
*/

#include <stdio.h>
#include <time.h>
#include <windows.h>
#include <winperf.h>
#include <winsock.h>
#include "client_utils.h"

#define Li2Double(x) ((double)((x).HighPart) * 4.294967296E9 +
(double)((x).LowPart))

static LARGE_INTEGER pFreq;
static double sFreq;
static int print_thread_id = 1;
static int user_id = 0;
static char *user_code = "C";

/*
 * get_thread_id
 * A function that returns the thread ID of the current thread
 */
static int get_thread_id()
{
    return(GetCurrentThreadId());
}

/*
 * get_prefix
 * Format the output prefix for printing:
 * It contains the user_id, 'C' or 'T' depending on whether it
 * is a terminal or a client and optional a thread identifier
 * The prefix is written in the buffer passed in by the caller.
 */
static void get_prefix(char *buffer)
{
    if (print_thread_id) {
        int thread_id = get_thread_id();
        sprintf(buffer, "%s(%d-%s-%d)%s",
            user_id < 10 ? " " : user_id < 100 ? " " : "",
            user_id,
            user_code,
            thread_id,
            thread_id < 10 ? " " : "");
    } else {
        sprintf(buffer, "%s(%2d-%s)",
            user_id < 10 ? " " : "", user_id, user_code);
    }
}

/*
 * err_printf
 * A var-arg function that appends the current time and
 * other data to the print request and sends it to stderr
 * if it is not a web client, to a file if it is
 */
void err_printf(char *format, ...)
{
    time_t cur_time;
    char time_str[30];
```

```
char line_prefix[50];
va_list ap;

va_start(ap, format);

cur_time = time(&cur_time);
strftime(time_str, 29, "%X", localtime(&cur_time));

get_prefix(line_prefix);

fprintf(ERROROUT, "%s %s - ", line_prefix, time_str);
vfprintf(ERROROUT, format, ap);
fflush(ERROROUT);

va_end(ap);
}

/*
 * encina_error_message
 * Report an encina error message by interpreting it and writing
 * it to both the logfile (if any) and to standard error
 */
void encina_error_message(char *msg, unsigned long n)
{
    char errorMsg[ENCINA_MAX_STATUS_STRING_SIZE];
    encina_StatusToString(n, ENCINA_MAX_STATUS_STRING_SIZE,
errorMsg);
    err_printf("ERROR: %s. Error code = %s (%d 0x%x) \n", msg, errorMsg, n,
n);
}

int get_time_init()
{
    QueryPerformanceFrequency(&pFreq);
    sFreq=Li2Double(pFreq);
    return 0;
}

int get_local_time(time_type *timeP)
{
    double cur_t;
    LARGE_INTEGER counter;

    QueryPerformanceCounter(&counter);
    cur_t = Li2Double(counter) / sFreq;
    timeP->sec = (long)cur_t;
    /* timeP->usec = ((long)cur_t - timeP->sec) * 1000000;*/
    timeP->usec = (long)((cur_t - timeP->sec) * 1000000);
    return 0;
}

/*
 * time_diff_ms
 * Return the difference in milliseconds between two times
 */
int time_diff_ms(struct timeval *t2, struct timeval *t1)
{
    int t_diff;

    t_diff = (t2->tv_usec + 1000000 - t1->tv_usec + 500) / 1000 +
(t2->tv_sec - t1->tv_sec - 1) * 1000;

    return(t_diff);
}

/*
```

```

* perfClntDataInit:
* Initialization for the shared file mapping.
*
* return: pointer to the shared memory space
*
* This routine creates a named mapped memory section that is used
* to communicate the TPCC performance data to the extensible
* counter DLL for NT perfmon.
*/
total_tran_count_t *perfClntDataInit()
{
    HANDLE hMappedObject;
    total_tran_count_t *pClntInfo = NULL;
    TCHAR szMappedObjectName[] =
TEXT("TPCC_CLNT_COUNTER_BLOCK");

    /* create named section for the performance data */
    hMappedObject = CreateFileMapping((HANDLE)0xFFFFFFFF,
        NULL,
        PAGE_READWRITE,
        0,
        sizeof(total_tran_count_t),
        szMappedObjectName);
    if (hMappedObject == NULL) {
        err_printf("perfClntDataInit: CreateFileMapping failed %x\n",
            GetLastError());
        pClntInfo = NULL;
    } else {
        /* map the section and assign the counter block pointer
        * to this section of memory
        */
        pClntInfo = (total_tran_count_t *) MapViewOfFile(hMappedObject,
            FILE_MAP_ALL_ACCESS,
            0,
            0,
            0);
        if (pClntInfo == NULL) {
            err_printf("perfClntDataInit: MapViewOfFile failed %x\n",
                GetLastError());
        }
        else {
            err_printf("perfClntDataInit: MapViewOfFile success\n");
        }
    }

    return(pClntInfo);
}

```

client_utils.h

```

#ifndef TPCC_CLIENT_UTILS_H
#define TPCC_CLIENT_UTILS_H

```

```

#include <stdio.h>
#include <time.h>
#include <dce/tpc.h>
#include <dce/dce_error.h>
#include <encina/encina.h>
#include <stdlib.h>
#include <utils/trace.h>
#include <winsock.h>
#include "mon_client.h"
#include "../include/tpcc_type.h"

```

```

extern FILE * errtpcc;
extern FILE * logtpcc;
extern int debug;

```

```

extern char log_file_name[];
extern void logprintf( char *format, ...);
extern void err_printf( char *format, ...);
extern void encina_error_message(char *msg, unsigned long n);
extern int time_diff_ms(struct timeval *t2, struct timeval *t1);

```

```

typedef struct {
    int num;
    int errs;
    double RTtotal[2]; // 1 for server RT and 0 for client RT
    int RTcount;
} tran_info_t;

```

```

/*
* total_tran_count_t
*
* structure that holds the total count of transaction of each type
* as well as the reposne times.
*/

```

```

typedef struct {
    tran_info_t tran[MAX_TRAN_TYPE + 1];
    int errors;
    double time;
} total_tran_count_t;

```

```

/* enc_status_t
* structure that holds error information
*/

```

```

typedef struct {
    int status;
    int line;
    char file[268];
    unsigned long encinaError;
    char errorMsg[ENCINA_MAX_STATUS_STRING_SIZE];
} enc_status_t;

```

```

#define FALSE 0
#define TRUE 1

```

```

#define DPRINT(args) if (0) err_printf args

```

```

#define CHECK_ENVIRON(str,var) if (str == NULL) { fprintf(ERROROUT, \
    "%s environment variable is not defined.\n",var); }

```

```

#define CHK_STATUS(st, val, _errMsg) \
    if(st) { \
        enc_status.status=val; \
        strcpy(enc_status.file, __FILE__); \
        enc_status.line=__LINE__; \
        enc_status.encinaError = st; \
        if(_errMsg)strcpy(enc_status.errorMsg, _errMsg); \
        if(st!=1) return; \
    }

```

```

#define UTIL_IDENT(a) a

```

```

#if ENCINA_C_ANSI_STRING_TOKEN_SUPPORT
#define UTIL_STRING(a) #a
#define UTIL_CONCAT(a, b) a ## b
#else /* ENCINA_C_ANSI_STRING_TOKEN_SUPPORT */
#define UTIL_STRING(a) "a"
#define UTIL_CONCAT(a, b) UTIL_IDENT(a)b
#endif /* ENCINA_C_ANSI_STRING_TOKEN_SUPPORT */

```

```

/* ENCINA_CALL: Make fail-fast calls on the various services. */
#define ENCINA_CALL(proc_name,call) \

```

```

{
    unsigned long _status;
    ENCINA_CALL_RC(proc_name,call,_status);
    if (_status) exit_program(_status);
}

#define ENCINA_CALL_RC(proc_name,call,rc)
{
    char _errorMsg[ENCINA_MAX_STATUS_STRING_SIZE];
    DPRINT(("ENCINA_CALL_RC: before call %s\n", proc_name));

    rc = (call);
    DPRINT(("ENCINA_CALL_RC: after call %s\n", proc_name));

    if (rc) {
        encina_StatusToString(rc, ENCINA_MAX_STATUS_STRING_SIZE,
            _errorMsg);
        err_printf( "%x\n", rc);
        err_printf( "%s\n", _errorMsg);
        err_printf( "%s\n", proc_name);
    }
}

void err_printf(char *format, ...);
void encina_error_message(char *msg, unsigned long n);
int get_time_init();
int get_local_time(time_type *timeP);
int time_diff_ms(struct timeval *t2, struct timeval *t1);

#endif /* TPCC_CLIENT_UTILS_H */

```

dlldata.c

```

/*****
DllData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file compile.

To completely reconstruct this file, delete it and rerun MIDL
on all the IDL files in this DLL, specifying this file for the
/dlldata command line option

*****/

#include <rpcproxy.h>

#ifdef __cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

```

```

#ifdef __cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */

error.h

/* FILE: ERROR.H
 * Microsoft TPC-C Kit Ver.
4.20.000
 * Copyright Microsoft, 1999
 * All Rights Reserved
 *
 * Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for error exception classes.
 *
 * Change history:
 * 4.20.000 - updated rev number to match kit
 * 4.21.000 - fixed bug: ~CBaseErr needed to be declared
virtual
*/

#pragma once

#ifdef _INC_STRING
#include <string.h>
#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int iError;
//error id of message
    char szMsg[256]; //message to
sent to browser
} SERRORMSG;

#define ERR_FATAL_LEVEL 1
#define ERR_WARNING_LEVEL 2
#define ERR_INFORMATION_LEVEL 3

#define ERR_TYPE_LOGIC -1 //logic error in program; internal error
#define ERR_SUCCESS 0 //success (a non-error error)
#define ERR_BAD_ITEM_ID 1 //expected abort record in txnRecord
#define ERR_TYPE_DELIVERY_POST 2 //expected delivery post failed
#define ERR_TYPE_WEBDLL 3 //tpcc web generated error
#define ERR_TYPE_SQL 4 //sql server generated error
#define ERR_TYPE_DBLIB 5 //dblib generated error
#define ERR_TYPE_ODBC 6 //odbc generated error

```

```

#define ERR_TYPE_SOCKET
7 //error on communication socket client rte
only
#define ERR_TYPE_DEADLOCK
8 //dblib and odbc only deadlock condition
#define ERR_TYPE_COM
9 //error from COM call
#define ERR_TYPE_TUXEDO
10 //tuxedo error
#define ERR_TYPE_OS
11 //operating system error
#define ERR_TYPE_MEMORY
12 //memory allocation error
#define ERR_TYPE_TPCC_ODBC
13 //error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB
14 //error from tpcc dblib txn module
#define ERR_TYPE_DELISRV
15 //delivery server error
#define ERR_TYPE_TXNLOG
16 //txn log error
#define ERR_TYPE_BCCONN
17 //Benchcraft connection class
#define ERR_TYPE_TPCC_CONN
18 //Benchcraft connection class
#define ERR_TYPE_ENCINA
19 //Encina error
#define ERR_TYPE_COMPONENT
20 //error from COM component
#define ERR_TYPE_RTE
21 //Benchcraft rte
#define ERR_TYPE_AUTOMATION
22 //Benchcraft automation errors

```

```

class CBaseErr
{
public:
    char *m_szApp;
    char *m_szMsg;
    char *m_szLoc; // code location where the error occurred
    int m_idMsg;

    CBaseErr(void)
    {
        m_idMsg = 0;
        m_szMsg = new char[m_szMsg_size];
        m_szApp = new char[m_szApp_size];
        m_szLoc = NULL;

        m_szMsg[0] = 0;
        m_szApp[0] = 0;

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    virtual ~CBaseErr(void)
    {
        if (m_szMsg)
            delete [] m_szMsg;
        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };

    CBaseErr(int idMsg)

```

```

    {
        m_idMsg = idMsg;
        m_szApp = new char[m_szApp_size];
        m_szMsg = new char[m_szMsg_size];
        m_szLoc = NULL;

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
        LoadString(GetModuleHandle(NULL), idMsg,
m_szMsg, m_szMsg_size);
    }

    CBaseErr(LPCTSTR szMsg)
    {
        m_idMsg = 0;
        m_szApp = new char[m_szApp_size];
        m_szMsg = new char[m_szMsg_size];
        m_szLoc = NULL;

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
        strcpy(m_szMsg, szMsg);
    }

    void SetError(char *szMsg, LPCTSTR szLocation)
    {
        if (szMsg != NULL)
            strcpy(m_szMsg, szMsg);
        else
            m_szMsg[0] = 0;

        if (szLocation != NULL)
        {
            delete [] m_szLoc;
            m_szLoc = new char[strlen(szLocation)+1];
            strcpy(m_szLoc, szLocation);
        }
        else
        {
            delete [] m_szLoc;
            m_szLoc = NULL;
        }
    }

    virtual void Draw(HWND hwnd, LPCTSTR szStr = NULL)
    {
        int j;
        char szTmp[512];

        if (szStr)
            j = wprintf(szTmp, "%s\n", szStr);
        if (m_szLoc)
            j += wprintf(szTmp+j,
"Location=%s\n", m_szLoc);
        if (m_szMsg)
            j += wprintf(szTmp+j, "%s\n", m_szMsg);

        ::MessageBox(hwnd, szTmp, m_szApp, MB_OK);
    }

    char *GetApp(void) { return m_szApp; }
    char *GetMsg(void) { return m_szMsg; }
    char *GetLocation(void) { return m_szLoc; }

    virtual int ErrorType() = 0; // a value which distinguishes the
kind of error that occurred
    virtual int ErrorNum() = 0; // an error value
specific to the error type

```

```

        virtual char *ErrorText() = 0;    // a string (i.e., human readable)
        representation of the error
    };

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone,
        eSend,
        eSocket,
        eConnect
    };

    CSocketErr(Action eAction, LPCTSTR szLocation);
    CSocketErr(int iError) { m_errId = iError; };
    int          m_errId;
    Action       m_eAction;

    int ErrorType() { return ERR_TYPE_SOCKET; };
    int ErrorNum() { return m_errId; };
    char *ErrorText(void);
};

class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx,
    };

    CSystemErr(Action eAction, LPCTSTR szLocation);

    void Draw(HWND hwnd, LPCTSTR szStr = NULL);

    int          m_errId;
    Action       m_eAction;

    int ErrorType() { return ERR_TYPE_OS; };
    int ErrorNum() { return m_errId; };
    char *ErrorText() { return m_szMsg; };
};

class CMemoryErr : public CBaseErr
{

```

```

public:
    CMemoryErr(void);

    int ErrorType() { return ERR_TYPE_MEMORY; };
    int ErrorNum() { return 0; };
    char *ErrorText() { return "Insufficient Memory to continue."; };
};

install.c

/*      FILE:          INSTALL.C
 *
 *      Microsoft TPC-C Kit Ver.
 *
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      not audited
 *
 *      PURPOSE:       Automated installation application for TPC-C
 *      Web Kit
 *      Contact:      Charles Levine (clevine@microsoft.com)
 *
 *      Change history:
 *
 *          4.20.000 - added COM installation steps
 */

#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <stdio.h>
#include <commctrl.h>
#include "..\..\common\src\ReadRegistry.h"

#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON          hIcon;
HINSTANCE      hInst;

DWORD          versionExeMS;
DWORD          versionExeLS;
DWORD          versionExeMM;
DWORD          versionDIIMS;
DWORD          versionDIILS;

// TPC-C registry settings
TPCCREGISTRYDATA Reg;

static int     iPoolThreadLimit;
static int     iThreadTimeout;
static int     iListenBackLog;
static int     iAcceptExOutstanding;

static int     iMaxPhysicalMemory;
//max physical memory in MB
static char    szLastFileName[64];    // last file we worked
on (for error reporting)

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);

```



```

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
static void ProcessOK(HWND hwnd, char *szDllPath);
static void ReadRegistrySettings(void);
static void WriteRegistrySettings(char *szDllPath);
static BOOL RegisterDLL(char *szFileName);
static int CopyFiles(HWND hDlg, char
*szDllPath);
static BOOL GetInstallPath(char *szDllPath);
static void GetVersionInfo(char *szDllPath, char
*szExePath);
static BOOL CheckWWWebService(void);
static BOOL StartWWWebService(void);
static BOOL StopWWWebService(void);
static void UpdateDialog(HWND hDlg);

BOOL install_com(char *szDllPath);

#include "..\..\common\src\ReadRegistry.cpp"

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE hPrevInstance,
LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;

    InitCommonControls();

    hIcon = LoadIcon(hInstance,
MAKEINTRESOURCE(IDI_ICON1));

    iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(),
LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(),
MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(),
UpdatedDlgProc, (LPARAM)iRc);
        }
    }

    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM
wParam, LPARAM lParam)
{
    HGLOBAL hRes;
    HRSRC hResInfo;
    BYTE *pSrc, *pDst;
    DWORD dwSize;
    static HFONT hFont;

    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12, 0, 0, 0, 400, 0, 0, 0,
0, 0, 0, 0, "Arial");

```

```

        SendMessage( GetDlgItem(hwnd,
IDR_LICENSE1), WM_SETFONT, (WPARAM)hFont, MAKELPARAM(0, 0)
);
        PostMessage(hwnd, WM_INITTEXT,
(WPARAM)0, (LPARAM)0);
        return TRUE;
        case WM_INITTEXT:
            hResInfo = FindResource(hInst,
MAKEINTRESOURCE(IDR_LICENSE1), "LICENSE");
            dwSize = SizeofResource(hInst, hResInfo);
            hRes = LoadResource(hInst, hResInfo);
            pSrc = (BYTE *)LockResource(hRes);
            pDst = (unsigned char *)malloc(dwSize+1);
            if ( pDst )
            {
                memcpy(pDst, pSrc, dwSize);
                pDst[dwSize] = 0;
                SetDlgItemText(hwnd,
IDC_LICENSE, (const char *)pDst);
                free(pDst);
            }
            else
                SetDlgItemText(hwnd,
IDC_LICENSE, (const char *)pSrc);
            return TRUE;
        case WM_DESTROY:
            DeleteObject(hFont);
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            if ( wParam == IDCANCEL )
                EndDialog(hwnd, FALSE);
            default:
                break;
    }
    return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM
wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:
                    SetDlgItemText(hwnd,
IDC_RESULTS, "TPC-C Web Client Installed");
                    break;
            }
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            break;
        default:
            break;
    }
    return FALSE;
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM
wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;

```

```

MEMORYSTATUS memoryStatus;
OSVERSIONINFO VI;
char          szTmp[256];
static char   szDllPath[256];
static char   szExePath[256];

switch(uMsg)
{
    case WM_INITDIALOG:
        GlobalMemoryStatus(&memoryStatus);
        iMaxPhysicalMemory=
(memoryStatus.dwTotalPhys/ 1048576);

        if ( GetInstallPath(szDllPath) )
        {
            MessageBox(hwnd, "Error internet
service inetsrv is not installed.", NULL, MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, FALSE);
            return TRUE;
        }

        // set default values
        ZeroMemory( &Reg, sizeof(Reg) );
        Reg.dwNumberOfDeliveryThreads = 4;
        Reg.dwMaxConnections = 100;
        Reg.dwMaxPendingDeliveries = 100;
        Reg.eDB_Protocol = DBLIB;
        Reg.eTxnMon = None;
        strcpy(Reg.szDbServer,
""");
        strcpy(Reg.szDbName,
"tpcc");

        strcpy(Reg.szDbUser,      "sa");
        strcpy(Reg.szDbPassword,  "");

        iPoolThreadLimit = iMaxPhysicalMemory *
2;

        iThreadTimeout = 86400;
        iListenBackLog = 15;
        iAcceptExOutstanding = 40;

        ReadTPCCRegistrySettings( &Reg );
        ReadRegistrySettings();

        GetModuleFileName(hInst, szExePath,
sizeof(szExePath));

        GetVersionInfo(szDllPath, szExePath);

        wsprintf(szTmp, "Version %d.%2d.%3d",
versionExeMS, versionExeMM, versionExeLS);
        SetDlgItemText(hwnd, IDC_VERSION,
szTmp);

        SetDlgItemText(hwnd, IDC_PATH,
szDllPath);

        SetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer);

        SetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser);

        SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);

        SetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName);

        SetDlgItemInt(hwnd, ED_THREADS,
Reg.dwNumberOfDeliveryThreads, FALSE);

        SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);

        SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);

        SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit, FALSE);

        SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);

        SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);

        SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, iAcceptExOutstanding,
FALSE);

        CheckDlgButton(hwnd, IDC_DBLIB, 0);
        CheckDlgButton(hwnd, IDC_ODBC, 0);
        if ( Reg.eDB_Protocol == DBLIB )
            CheckDlgButton(hwnd,
IDC_DBLIB, 1);

        else
            CheckDlgButton(hwnd,
IDC_ODBC, 1);

        // check OS version level for COM. Must be
at least Windows 2000

        VI.dwOSVersionInfoSize = sizeof(VI);
        GetVersionEx( &VI );
        if (VI.dwMajorVersion < 5)
        {
            HWND hDlg = GetDlgItem(
hwnd, IDC_TM_MTS );

            EnableWindow( hDlg, 0 ); //
disable COM option

            if (Reg.eTxnMon == COM)
                Reg.eTxnMon = None;
        }

        CheckDlgButton(hwnd, IDC_TM_NONE,
0);

        CheckDlgButton(hwnd, IDC_TM_TUXEDO,
0);

        CheckDlgButton(hwnd, IDC_TM_MTS, 0);
        CheckDlgButton(hwnd, IDC_TM_ENCINA,
0);

        switch (Reg.eTxnMon)
        {
            case None:
                CheckDlgButton(hwnd,
IDC_TM_NONE, 1);

                break;

            case TUXEDO:
                CheckDlgButton(hwnd,
IDC_TM_TUXEDO, 1);

                break;

            case ENCINA:
                CheckDlgButton(hwnd,
IDC_TM_ENCINA, 1);

                break;

            case COM:
                CheckDlgButton(hwnd,
IDC_TM_MTS, 1);

                break;
        }

        return TRUE;

    case WM_PAINT:
        if ( !IsIconic(hwnd) )
        {

```

```

        BeginPaint(hwnd, &ps);
        DrawIcon(ps.hdc, 0, 0, hIcon);
        EndPaint(hwnd, &ps);
        return TRUE;
    }
    break;
case WM_COMMAND:
    if ( HIWORD(wParam) == BN_CLICKED )
    {
        switch( LOWORD(wParam) )
        {
            case IDC_DBLIB:
                return
TRUE;

            case IDC_ODBC:
                return
TRUE;

            case IDOK:
                ProcessOK(hwnd, szDllPath);
                return
TRUE;

            case IDCANCEL:
                EndDialog(hwnd, FALSE);
                return
TRUE;

            default:
                return
FALSE;
        }
    }
    break;
default:
    break;
}
return FALSE;
}

static void ProcessOK(HWND hwnd, char *szDllPath)
{
    int          d;
    HWND        hDlg;
    int          rc;

    char        szFullName[256];
    char        szErrMsg[128];

    // read settings from dialog
    Reg.dwNumberOfDeliveryThreads = GetDlgItemInt(hwnd,
ED_THREADS, &d, FALSE);
    Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
    Reg.dwMaxPendingDeliveries = GetDlgItemInt(hwnd,
ED_MAXDELIVERIES, &d, FALSE);

    GetDlgItemText(hwnd, ED_DB_SERVER, Reg.szDbServer,
sizeof(Reg.szDbServer));
    GetDlgItemText(hwnd, ED_DB_USER_ID, Reg.szDbUser,
sizeof(Reg.szDbUser));
    GetDlgItemText(hwnd, ED_DB_PASSWORD, Reg.szDbPassword,
sizeof(Reg.szDbPassword));
    GetDlgItemText(hwnd, ED_DB_NAME, Reg.szDbName,
sizeof(Reg.szDbName));

    if ( IsDlgButtonChecked(hwnd, IDC_DBLIB) )
    {
        Reg.eDB_Protocol = DBLIB;

        rc = 1;
    }
    else if ( IsDlgButtonChecked(hwnd, IDC_ODBC) )
    {
        Reg.eDB_Protocol = ODBC;
        rc = 2;
    }

    if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE) )
        Reg.eTxnMon = None;
    else if ( IsDlgButtonChecked(hwnd, IDC_TM_TUXEDO) )
        Reg.eTxnMon = TUXEDO;
    else if ( IsDlgButtonChecked(hwnd, IDC_TM_MTS) )
        Reg.eTxnMon = COM;
    else if ( IsDlgButtonChecked(hwnd, IDC_TM_ENCINA) )
        Reg.eTxnMon = ENCINA;

    iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
    iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
    iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
    iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);

    ShowWindow(hwnd, SW_HIDE);
    hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
    ShowWindow(hDlg, SW_SHOWNA);
    UpdateDialog(hDlg);

    // write binaries to inetpub\wwwroot
    rc = CopyFiles(hDlg, szDllPath);
    if ( !rc )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrMsg, "Error(s) occured when creating " );
        strcat( szErrMsg, szLastFileName );
        MessageBox(hwnd, szErrMsg, NULL, MB_ICONSTOP |
MB_OK);

        EndDialog(hwnd, 0);
        return;
    }

    // update registry
    SetDlgItemText(hDlg, IDC_STATUS, "Updating Registry.");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
    UpdateDialog(hDlg);
    WriteRegistrySettings(szDllPath);

    // register com proxy stub
    strcpy(szFullName, szDllPath);
    strcat(szFullName, "tpcc_com_ps.dll");
    if (!RegisterDLL(szFullName))
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrMsg, "Error occured when registering " );
        strcat( szErrMsg, szFullName );
        MessageBox(hwnd, szErrMsg, NULL, MB_ICONSTOP |
MB_OK);

        EndDialog(hwnd, 0);
        return;
    }
}

```

```

    }

    // if using COM
    if (Reg.eTxnMon == COM)
    {
        SetDlgItemText(hDlg, IDC_STATUS, "Configuring
COM.");
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        if (install_com(szDllPath))
        {
            ShowWindow(hwnd, SW_SHOWNA);
            DestroyWindow(hDlg);
            strcpy( szErrTxt, "Error occured when
configuring COM settings.");
            MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, 0);
            return;
        }

        Sleep(100);

        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);

        EndDialog(hwnd, rc);
        return;
    }

static void ReadRegistrySettings(void)
{
    HKEY    hKey;
    DWORD   size;
    DWORD   type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Parameters", 0,
KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size = sizeof(iPoolThreadLimit);
        if ( RegQueryValueEx(hKey, "PoolThreadLimit", 0,
&type, (char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
            if ( !iPoolThreadLimit )
                iPoolThreadLimit =
iMaxPhysicalMemory * 2;

        size = sizeof(iThreadTimeout);
        if ( RegQueryValueEx(hKey, "ThreadTimeout", 0,
&type, (char *)&iThreadTimeout, &size) == ERROR_SUCCESS )
            if ( !iThreadTimeout )
                iThreadTimeout = 86400;

        size = sizeof(iListenBackLog);
        if ( RegQueryValueEx(hKey, "ListenBackLog", 0,
&type, (char *)&iListenBackLog, &size) == ERROR_SUCCESS )
            if ( !iListenBackLog )
                iListenBackLog = 15;

        RegCloseKey(hKey);
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters", 0,
KEY_READ, &hKey) == ERROR_SUCCESS )

```

```

    {
        size = sizeof(iAcceptExOutstanding);
        if ( RegQueryValueEx(hKey, "AcceptExOutstanding", 0,
&type, (char *)&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
            if ( !iAcceptExOutstanding )
                iAcceptExOutstanding = 40;

        RegCloseKey(hKey);
    }
}

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY    hKey;
    DWORD   dwDisposition;
    char    szTmp[256];
    char    *ptr;
    int     iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0, REG_SZ, szTmp,
strlen(szTmp)+1);

        RegSetValueEx(hKey, "NumberOfDeliveryThreads", 0,
REG_DWORD, (char *)&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));
        RegSetValueEx(hKey, "MaxConnections", 0,
REG_DWORD, (char *)&Reg.dwMaxConnections,
sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hKey, "MaxPendingDeliveries", 0,
REG_DWORD, (char *)&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hKey, "DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol], strlen(szDBNames[Reg.eDB_Protocol])+1);
        RegSetValueEx(hKey, "TxnMonitor", 0, REG_SZ,
szTxnMonNames[Reg.eTxnMon], strlen(szTxnMonNames[Reg.eTxnMon])+1);

        RegSetValueEx(hKey, "DbServer", 0, REG_SZ,
Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0, REG_SZ,
Reg.szDbName, strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0, REG_SZ,
Reg.szDbUser, strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword", 0, REG_SZ,
Reg.szDbPassword, strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey, "COM_SinglePool", 0, REG_SZ,
szTmp, strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if ( (iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition)) == ERROR_SUCCESS )

```

```

    {
        RegSetValueEx(hKey, "PoolThreadLimit", 0,
REG_DWORD, (char *)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
        RegSetValueEx(hKey, "ThreadTimeout", 0,
REG_DWORD, (char *)&iThreadTimeout, sizeof(iThreadTimeout));
        RegSetValueEx(hKey, "ListenBackLog", 0,
REG_DWORD, (char *)&iListenBackLog, sizeof(iListenBackLog));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if ( (iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition)) == ERROR_SUCCESS )
    {
        RegSetValueEx(hKey, "AcceptExOutstanding", 0,
REG_DWORD, (char *)&iAcceptExOutstanding,
sizeof(iAcceptExOutstanding));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg, WPARAM
wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd, IDC_PROGRESS1,
PBM_SETRANGE, 0, MAKELPARAM(0, 16));
        SendDlgItemMessage(hwnd, IDC_PROGRESS1,
PBM_SETSTEP, (WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE      hLib;
    FARPROC        lpDllEntryPoint;

    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib, "DllRegisterServer");
    if (lpDllEntryPoint != NULL)
    {
        return ((*lpDllEntryPoint)() == S_OK);
    }
    else
        return FALSE;    //unable to locate entry point
}

BOOL FileFromResource( char *szResourceName, int iResourceId, char
*szDllPath, char *szFileName )
{
    HGLOBAL          hDLL;
    HRSRC            hResInfo;
    HANDLE           hFile;
    DWORD            dwSize;
    BYTE             *pSrc;

```

```

    DWORD            d;
    char             szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !(hFile = CreateFile(szFullName, GENERIC_WRITE, 0, NULL,
CREATE_ALWAYS, FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d, NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath)
{
    BOOL            bSvcRunning;

    bSvcRunning = CheckWWWebService();
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS, "Stopping Web
Service.");
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        StopWWWebService();
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }

    SetDlgItemText(hDlg, IDC_STATUS, "Copying Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
    UpdateDialog(hDlg);

    // install TPCC.DLL
    strcpy( szLastFileName, "tpcc.dll" );
    if ( !FileFromResource( "TPCCDLL", IDR_TPCCDLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
    UpdateDialog(hDlg);

    // install tpcc_dblib.dll
    strcpy( szLastFileName, "tpcc_dblib.dll" );
    if ( !FileFromResource( "DBLIB_DLL", IDR_DBLIB_DLL,
szDllPath, szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);

```

```

UpdateDialog(hDlg);

// install tpcc_odbc.dll
strcpy( szLastFileName, "tpcc_odbc.dll" );
if (!FileFromResource( "ODBC_DLL", IDR_ODBC_DLL,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tuxapp.exe
strcpy( szLastFileName, "tuxapp.exe" );
if (!FileFromResource( "TUXEDO_APP", IDR_TUXEDO_APP,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_tuxedo.dll
strcpy( szLastFileName, "tpcc_tuxedo.dll" );
if (!FileFromResource( "TUXEDO_DLL", IDR_TUXEDO_DLL,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_com.dll
strcpy( szLastFileName, "tpcc_com.dll" );
if (!FileFromResource( "COM_DLL", IDR_COM_DLL, szDllPath,
szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_com_all.tlb
strcpy( szLastFileName, "tpcc_com_all.tlb" );
if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_com_ps.dll
strcpy( szLastFileName, "tpcc_com_ps.dll" );
if (!FileFromResource( "COM_PS_DLL", IDR_COMPS_DLL,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

// install tpcc_com_all.dll
strcpy( szLastFileName, "tpcc_com_all.dll" );
if (!FileFromResource( "COM_ALL_DLL", IDR_COMALL_DLL,
szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

//if we stopped service restart it.
if ( bSvcRunning )
{

```

```

SetDlgItemText(hDlg, IDC_STATUS, "Starting Web
Service.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
StartWWWService();
}

SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
UpdateDialog(hDlg);

return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    char *ptr;
    int iRc;

    szDllPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters\\Virtual Roots",
0, KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey, "/", NULL, NULL,
szData, &sv ); // used by IIS 3.0
        if (iRc == ERROR_FILE_NOT_FOUND)
            iRc = RegQueryValueEx( hKey, "/", NULL,
NULL, szData, &sv ); // used by IIS 4.0
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szDllPath, szData);
            if ( (ptr = strchr(szDllPath, ','))
                *ptr = 0;

            len = strlen(szDllPath);
            if ( szDllPath[len-1] != '\\' )
            {
                szDllPath[len] = '\\';
                szDllPath[len+1] = 0;
            }
        }

        RegCloseKey(hKey);
    }

    return bRc;
}

static void GetVersionInfo(char *szDLLPath, char *szExePath)
{
    DWORD d;
    DWORD dwSize;
    DWORD dwBytes;
    char *ptr;
    VS_FIXEDFILEINFO *vs;

    versionDIIMS = 0;
    versionDIILS = 0;

```

```

if ( _access(szDLLPath, 0) == 0 )
{
    dwSize = GetFileVersionInfoSize(szDLLPath, &d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
        VerQueryValue(ptr, "\\",&vs, &dwBytes);
        GetFileVersionInfo(szDLLPath, 0, dwSize,
        VerQueryValue(ptr, "\\",&vs, &dwBytes);
        versionDllMS = vs->dwProductVersionMS;
        versionDllLS = vs->dwProductVersionLS;
        free(ptr);
    }
}

versionExeMS = 0x7FFF;
versionExeLS = 0x7FFF;
dwSize = GetFileVersionInfoSize(szExePath, &d);
if ( dwSize )
{
    ptr = (char *)malloc(dwSize);
    GetFileVersionInfo(szExePath, 0, dwSize, ptr);
    VerQueryValue(ptr, "\\",&vs, &dwBytes);

    versionExeMS = vs->dwProductVersionMS;
    versionExeLS = LOWORD(vs->dwProductVersionLS);
    versionExeMM = HIWORD(vs->dwProductVersionLS);
    free(ptr);
}
return;
}

static BOOL CheckWWWebService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("W3SVC"),
SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService, &ssStatus) )
        goto ServiceNotRunning;

    if ( !ControlService(schService, SERVICE_CONTROL_STOP,
&ssStatus) )
        goto ServiceNotRunning;
    //start Service pending, Check the status until the service is running.
    if (! QueryServiceStatus(schService, &ssStatus) )
        goto ServiceNotRunning;

    CloseServiceHandle(schService);
    return TRUE;

ServiceNotRunning:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StartWWWebService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;

```

```

SERVICE_STATUS     ssStatus;
DWORD               dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("W3SVC"),
SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! StartService(schService, 0, NULL) )
        goto StartWWWebErr;
    //start Service pending, Check the status until the service is running.
    if (! QueryServiceStatus(schService, &ssStatus) )
        goto StartWWWebErr;
    while( ssStatus.dwCurrentState != SERVICE_RUNNING)
    {
        dwOldCheckPoint = ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);
        //Wait for the specified interval.
        if ( !QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
                break;
        if (dwOldCheckPoint >= ssStatus.dwCheckPoint)
            //Break if the checkpoint has not been incremented.
                break;
    }

    if (ssStatus.dwCurrentState == SERVICE_RUNNING)
        goto StartWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;

StartWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWebService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;
    DWORD               dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("W3SVC"),
SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService, &ssStatus) )
        goto StopWWWebErr;

    if ( !ControlService(schService, SERVICE_CONTROL_STOP,
&ssStatus) )
        goto StopWWWebErr;
    //start Service pending, Check the status until the service is running.
    if (! QueryServiceStatus(schService, &ssStatus) )
        goto StopWWWebErr;
    while( ssStatus.dwCurrentState == SERVICE_RUNNING)
    {

```

```

        dwOldCheckPoint = ssStatus.dwCheckPoint;
//Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);
        //Wait for the specified interval.
        if ( !QueryServiceStatus(schService, &ssStatus) )
//Check the status again.
            break;
        if (dwOldCheckPoint >= ssStatus.dwCheckPoint)
//Break if the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState == SERVICE_RUNNING)
        goto StopWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;

StopWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0, PM_REMOVE) )
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

```

install.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//

#define IDD_DIALOG1                101
#define IDI_ICON1                  102
#define IDR_TPCCDLL                103
#define IDD_DIALOG2                105
#define IDI_ICON2                  106
#define IDR_DELIVERY               107
#define IDD_DIALOG3                108

#define BN_LOG                      1001
#define ED_KEEP                     1002
#define ED_THREADS                  1003
#define ED_THREADS2                 1004
#define IDC_PATH                    1007
#define IDC_VERSION                 1009
#define IDC_RESULTS                 1010
#define IDC_PROGRESS1              1011
#define IDC_STATUS                  1012
#define IDC_BUTTON1                1013
#define ED_MAXCONNECTION           1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT      1018
#define ED_IIS_LISTEN_BACKLOG      1019

```

```

#define IDC_DBLIB                    1021
#define IDC_ODBC                     1022
#define IDC_CONNECT_POOL            1023
#define ED_USER_CONNECT_DELAY_TIME 1024

```

```

// Next default values for new objects
//

```

install.rc

```

//Microsoft Developer Studio generated resource script.
//
#include "resource.h"

```

```

#define APSTUDIO_READONLY_SYMBOLS
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

// English (U.S.) resources

```

```

#ifndef AFX_RESOURCE_DLL || defined AFX_TARG_ENU
#define _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

```

```

//
// Dialog
//

```

```

IDD_DIALOG1 DIALOGEX 0, 0, 219, 351
STYLE DS_MODALFRAME | DS_CENTER | WS_MINIMIZEBOX |
WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT    ED_THREADS,164,45,34,12,ES_RIGHT | ES_NUMBER,
                WS_EX_RTLREADING
    EDITTEXT    ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT |
ES_NUMBER,
                WS_EX_RTLREADING
    EDITTEXT    ED_MAXCONNECTION,164,73,34,12,ES_RIGHT |
ES_NUMBER,
                WS_EX_RTLREADING
    CONTROL    "None",IDC_TM_NONE,"Button",BS_AUTORADIOBUTTON |
                WS_GROUP | WS_TABSTOP,43,100,33,10
    CONTROL    "COM",IDC_TM_MTS,"Button",BS_AUTORADIOBUTTON |
                WS_TABSTOP,43,113,32,10
    CONTROL    "TUXEDO",IDC_TM_TUXEDO,"Button",BS_AUTORADIOBUTTON |
                WS_TABSTOP,106,100,46,10
    CONTROL    "ENCINA",IDC_TM_ENCINA,"Button",BS_AUTORADIOBUTTON |

```



```

        WS_DISABLED | WS_TABSTOP,106,113,43,10
    EDITTEXT    ED_DB_SERVER,131,152,67,12,ES_AUTOHSCROLL
    EDITTEXT    ED_DB_USER_ID,131,165,67,12,ES_AUTOHSCROLL
    EDITTEXT    ED_DB_PASSWORD,131,178,67,12,ES_AUTOHSCROLL
    EDITTEXT    ED_DB_NAME,131,191,67,12,ES_AUTOHSCROLL
    CONTROL
"DBLIB",IDC_DBLIB,"Button",BS_AUTORADIOBUTTON | WS_GROUP |
    WS_TABSTOP,45,219,39,12
    CONTROL
"ODBC",IDC_ODBC,"Button",BS_AUTORADIOBUTTON | WS_TABSTOP,
    91,219,39,12
    EDITTEXT
ED_IIS_MAX_THREAD_POOL_LIMIT,164,263,34,12,ES_RIGHT |
    ES_NUMBER,WS_EX_RTREADING
    EDITTEXT
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,164,277,34,12,ES_RIGHT |
    ES_NUMBER,WS_EX_RTREADING
    EDITTEXT    ED_IIS_THREAD_TIMEOUT,164,291,34,12,ES_RIGHT |
ES_NUMBER,
    WS_EX_RTREADING
    EDITTEXT    ED_IIS_LISTEN_BACKLOG,164,305,34,12,ES_RIGHT |
ES_NUMBER,
    WS_EX_RTREADING
    DEFPUSHBUTTON "OK",IDOK,53,331,50,14
    PUSHBUTTON   "Cancel",IDCANCEL,119,331,50,14
    EDITTEXT    IDC_PATH,106,26,91,13,ES_AUTOHSCROLL |
ES_READONLY
    LTEXT        "Number of Delivery Threads:",IDC_STATIC,35,45,115,12
    LTEXT        "Max Number of Connections:",IDC_STATIC,35,73,115,12
    RTEXT        "Version 4.11",IDC_VERSION,120,4,89,9
    LTEXT        "IIS Max Thread Pool Limit:",IDC_STATIC,36,263,115,12
    LTEXT        "Web Service Backlog Queue
Size:",IDC_STATIC,36,277,115,
    12
    LTEXT        "IIS Thread Timeout (seconds):",IDC_STATIC,36,291,115,12
    LTEXT        "IIS Listen Backlog:",IDC_STATIC,36,307,115,10
    GROUPBOX    "Database
Interface",IDC_STATIC,35,208,163,27,WS_GROUP
    LTEXT        "Installation directory:",IDC_STATIC,35,29,71,10
    GROUPBOX    "Transaction Monitor",IDC_STATIC,33,90,165,37
    LTEXT        "Server Name:",IDC_STATIC,35,155,56,8
    LTEXT        "User ID:",IDC_STATIC,35,168,60,8
    LTEXT        "User Password:",IDC_STATIC,35,181,83,8
    LTEXT        "Database Name:",IDC_STATIC,35,194,54,8
    GROUPBOX    "SQL Server Connection
Properties",IDC_STATIC,22,139,187,
    102
    GROUPBOX    "Web Client Properties",IDC_STATIC,22,15,187,118
    GROUPBOX    "IIS Settings",IDC_STATIC,22,247,187,79
    LTEXT        "Max Pending Deliveries:",IDC_STATIC,35,59,115,12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFOREGROUND | DS_3DLOOK | DS_CENTER |
WS_POPUP | WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON "OK",IDOK,33,45,50,9
    CTEXT        "HTML TPC-C Installation
Successful",IDC_RESULTS,7,22,
    102,18,0,WS_EX_CLIENTEDGE
    ICON        IDI_ICON2,IDC_STATIC,50,7,18,20,SS_REALSIZEIMAGE,
WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG DISCARDABLE 0, 0, 91, 40

```

```

STYLE DS_SYSMODAL | DS_MODALFRAME | DS_3DLOOK |
DS_CENTER | WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL
    "Progress1",IDC_PROGRESS1,"msctls_progress32",WS_BORDER,
    7,20,77,13
    CTEXT        "Static",IDC_STATUS,7,7,77,12,SS_SUNKEN
END

IDD_DIALOG4 DIALOG DISCARDABLE 0, 0, 291, 202
STYLE DS_MODALFRAME | DS_CENTER | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT    IDC_LICENSE,7,7,271,167,ES_MULTILINE |
ES_AUTOVSCROLL |
    ES_AUTOHSCROLL | ES_READONLY | WS_VSCROLL |
WS_HSCROLL
    DEFPUSHBUTTON "I &Agree",IDOK,87,181,50,14
    PUSHBUTTON   "&Cancel",IDCANCEL,153,181,50,14
END

////////////////////////////////////
//
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 345
    END

    IDD_DIALOG2, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 109
        TOPMARGIN, 7
        BOTTOMMARGIN, 54
    END

    IDD_DIALOG3, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 84
        TOPMARGIN, 7
        BOTTOMMARGIN, 33
    END

    IDD_DIALOG4, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 278
        TOPMARGIN, 7
        BOTTOMMARGIN, 195
    END
END

```

```

#endif // APSTUDIO_INVOKED

#ifdef APSTUDIO_INVOKED
////////////////////////////////////
//
// TEXTINCLUDE
//

1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include ""afxres.h""\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

////////////////////////////////////
//
// Icon
//

// Icon with lowest ID value placed first to ensure application icon
// remains consistent on all systems.
IDI_ICON1      ICON DISCARDABLE "icon1.ico"
IDI_ICON2      ICON DISCARDABLE "icon2.ico"

////////////////////////////////////
//
// TPCCDLL
//

IDR_TPCCDLL     TPCCDLL DISCARDABLE
"..\\..\\visapi_dll\\bin\\tpcc.dll"

#ifdef _MAC
////////////////////////////////////
//
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,20,0
PRODUCTVERSION 0,4,20,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN

```

```

BLOCK "040904b0"
BEGIN
    VALUE "Comments", "TPC-C Web Client Installer\0"
    VALUE "CompanyName", "Microsoft\0"
    VALUE "FileDescription", "install\0"
    VALUE "FileVersion", "0, 4, 20, 0\0"
    VALUE "InternalName", "install\0"
    VALUE "LegalCopyright", "Copyright © 1999\0"
    VALUE "OriginalFilename", "install.exe\0"
    VALUE "ProductName", "Microsoft install\0"
    VALUE "ProductVersion", "0, 4, 20, 0\0"
END
END
BLOCK "VarFileInfo"
BEGIN
    VALUE "Translation", 0x409, 1200
END
END

#endif // !_MAC

////////////////////////////////////
//
// LICENSE
//

IDR_LICENSE1     LICENSE DISCARDABLE "license.txt"

////////////////////////////////////
//
// DBLIB_DLL
//

IDR_DBLIB_DLL     DBLIB_DLL DISCARDABLE
"..\\..\\db_dblib_dll\\bin\\tpcc_dblib.dll"

////////////////////////////////////
//
// ODBC_DLL
//

IDR_ODBC_DLL     ODBC_DLL DISCARDABLE
"..\\..\\db_odbc_dll\\bin\\tpcc_odbc.dll"

////////////////////////////////////
//
// TUXEDO_APP
//

IDR_TUXEDO_APP     TUXEDO_APP DISCARDABLE
"..\\..\\tuxapp\\bin\\tuxapp.exe"

////////////////////////////////////
//
// TUXEDO_DLL
//

IDR_TUXEDO_DLL     TUXEDO_DLL DISCARDABLE
"..\\..\\tm_tuxedo_dll\\bin\\tpcc_tuxedo.dll"

////////////////////////////////////
//
// COM_DLL
//

IDR_COM_DLL     COM_DLL DISCARDABLE
"..\\..\\tm_com_dll\\bin\\tpcc_com.dll"

```

```

////////////////////////////////////
//
// COM_PS_DLL
//
IDR_COMPS_DLL      COM_PS_DLL DISCARDABLE
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.dll"

////////////////////////////////////
//
// COM_ALL_DLL
//
IDR_COMALL_DLL     COM_ALL_DLL DISCARDABLE
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.dll"

////////////////////////////////////
//
// COM_TYPLIB
//
IDR_COMTYPLIB_DLL  COM_TYPLIB DISCARDABLE
"..\\..\\tpcc_com_all\\src\\tpcc_com_all.tlb"

#endif // English (U.S.) resources
////////////////////////////////////

#ifndef APSTUDIO_INVOKED
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////
#endif // not APSTUDIO_INVOKED

```

install_com.cpp

```

/*      FILE:          INSTALL_COM.CPP
*
*      4.20.000
*
*      All Rights Reserved
*
*      Copyright Microsoft, 1999
*
*      not audited
*
*      PURPOSE:       installation code for COM application for
*      TPC-C Web Kit
*      Contact:      Charles Levine (clevine@microsoft.com)
*
*      Change history:
*      4.20.000 - first version
*/

#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{

```

```

}
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp = NULL;
    ICatalogCollection* pCatalogCollectionCo = NULL;
    ICatalogCollection* pCatalogCollectionItf = NULL;
    ICatalogCollection* pCatalogCollectionMethod = NULL;

    ICatalogObject* pCatalogObjectApp = NULL;
    ICatalogObject* pCatalogObjectCo = NULL;
    ICatalogObject* pCatalogObjectItf = NULL;
    ICatalogObject* pCatalogObjectMethod = NULL;

    _bstr_t bstrTemp, bstrTemp2,
    bstrTemp3, bstrTemp4;
    _bstr_t bstrDllPath =
szDllPath;
    _variant_t vTmp, vKey;
    long lActProp, lCount,
    lCountCo, lCountItf, lCountMethod;
    bool bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);

    HRESULT hr = CoCreateInstance(CLSID_COMAdminCatalog,
    NULL,
    CLSCTX_INPROC_SERVER,
    IID_ICOMAdminCatalog,
    (void**) &pCOMAdminCat);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "Applications";

    // Attempt to connect to "Applications" in the Catalog
    hr = pCOMAdminCat->GetCollection(bstrTemp,
    (IDispatch**) &pCatalogCollectionApp);
    if (!SUCCEEDED(hr)) goto Error;

    // Attempt to load the "Applications" collection
    hr = pCatalogCollectionApp->Populate();
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionApp->get_Count(&lCount);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through applications to delete existing "TPC-C" application
    (if any)
    while (lCount > 0)
    {
        hr = pCatalogCollectionApp->get_Item(lCount - 1,
        (IDispatch**) &pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogObjectApp->get_Name(&vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        if (wcsncmp(vTmp.bstrVal, L"TPC-C"))
        {

```

```

        lCount--;
        continue;
    }
    else
    {
        hr = pCatalogCollectionApp->Remove(lCount
- 1);
        if (!SUCCEEDED(hr)) goto Error;
        break;
    }
}

hr = pCatalogCollectionApp->SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

// add the new application
hr = pCatalogCollectionApp->Add((IDispatch**)
&pCatalogObjectApp);
if (!SUCCEEDED(hr)) goto Error;

// set properties
bstrTemp = "Name";
vTmp = "TPC-C";
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set as a library (in process) application
bstrTemp = "Activation";
lActProp = COMAdminActivationInproc;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set security level to process
bstrTemp = "AccessChecksLevel";
lActProp = COMAdminAccessChecksApplicationLevel;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// save key to get the Components collection later
hr = pCatalogObjectApp->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

// save changes (app creation) so component installation will work
hr = pCatalogCollectionApp->SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectApp->Release();
pCatalogObjectApp = NULL;

bstrTemp = "TPC-C";
app name
bstrTemp2 = bstrDllPath + "tpcc_com_all.dll";
DLL
bstrTemp3 = bstrDllPath + "tpcc_com_all.tlb";
type library (TLB)
bstrTemp4 = bstrDllPath + "tpcc_com_ps.dll";
proxy/stub dll

hr = pCOMAdminCat->InstallComponent(bstrTemp,
bstrTemp2,
bstrTemp3,
bstrTemp4);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Components";
hr = pCatalogCollectionApp->GetCollection(bstrTemp, vKey,
(IDispatch**) &pCatalogCollectionCo);
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->get_Count(&lCountCo);
if (!SUCCEEDED(hr)) goto Error;

// iterate through components in application and set the properties
while (lCountCo > 0)
{
    hr = pCatalogCollectionCo->get_Item(lCountCo - 1,
(IDispatch**) &pCatalogObjectCo);
    if (!SUCCEEDED(hr)) goto Error;

    // used for debugging (view the name)
    hr = pCatalogObjectCo->get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructionEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructorString";
    bstrTemp2 = "dummy string (do not remove)";
    vTmp = bstrTemp2;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "JustInTimeActivation";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "MaxPoolSize";
    vTmp.Clear(); // clear variant so it isn't stored as a
bool (_variant_t feature)
    vTmp = (long)30;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ObjectPoolingEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // save key to get the InterfacesForComponent collection
    hr = pCatalogObjectCo->get_Key(&vKey);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "InterfacesForComponent";
    hr = pCatalogCollectionCo->GetCollection(bstrTemp,
vKey, (IDispatch**) &pCatalogCollectionItf);
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionItf->Populate();
    if (!SUCCEEDED(hr)) goto Error;
}

```

```

    hr = pCatalogCollectionItf->get_Count(&ICountItf);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through interfaces in component
    while (ICountItf > 0)
    {
        hr =
pCatalogCollectionItf->get_Item(ICountItf - 1, (IDispatch**)
&pCatalogObjectItf);
        if (!SUCCEEDED(hr)) goto Error;

        // save key to get the MethodsForInterface
collection
        hr = pCatalogObjectItf->get_Key(&vKey);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "MethodsForInterface";
        hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionMethod);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionMethod->Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr =
pCatalogCollectionMethod->get_Count(&ICountMethod);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through methods of interface
        while (ICountMethod > 0)
        {
            hr =
pCatalogCollectionMethod->get_Item(ICountMethod - 1, (IDispatch**)
&pCatalogObjectMethod);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "AutoComplete";
            bTmp = TRUE;
            vTmp = bTmp;
            hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectMethod->Release();
            pCatalogObjectMethod = NULL;

            ICountMethod--;
        }

        // save changes
        hr =
pCatalogCollectionMethod->SaveChanges(&IActProp);
        if (!SUCCEEDED(hr)) goto Error;

        pCatalogObjectItf->Release();
        pCatalogObjectItf = NULL;

        ICountItf--;
    }

    pCatalogObjectCo->Release();
    pCatalogObjectCo = NULL;

```

```

        ICountCo--;
    }

    // save changes
    hr = pCatalogCollectionCo->SaveChanges(&IActProp);
    if (!SUCCEEDED(hr)) goto Error;

    pCatalogCollectionApp->Release();
    pCatalogCollectionApp = NULL;

    pCatalogCollectionCo->Release();
    pCatalogCollectionCo = NULL;

    pCatalogCollectionItf->Release();
    pCatalogCollectionItf = NULL;

    pCatalogCollectionMethod->Release();
    pCatalogCollectionMethod = NULL;

Error:
    CoUninitialize();

    if (!SUCCEEDED(hr))
    {
        LPTSTR lpBuf;
        DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER |
FORMAT_MESSAGE_FROM_SYSTEM,
        NULL,
        hr,
        MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),
        (LPTSTR) &lpBuf,
        0,
        NULL);
        // _tprintf(_T("Error adding components. HRESULT:
0x%x\n%s"), hr, lpBuf);
        return TRUE;
    }
    else
        return FALSE;
}

```

license.txt

END-USER LICENSE AGREEMENT FOR MICROSOFT TPC-C BENCHMARK KIT

IMPORTANT READ CAREFULLY: This Microsoft End-User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and Microsoft Corporation for the Microsoft software product identified above, which includes computer software and may include associated media, printed materials, and online or electronic documentation (SOFTWARE PRODUCT). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this Agreement, you are not authorized to use the SOFTWARE PRODUCT.

The SOFTWARE PRODUCT is protected by copyright laws

and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE. This EULA grants you the following rights:

Use. Microsoft grants to you the right to install and use copies of the SOFTWARE PRODUCT only in conjunction with validly licensed copies of Microsoft SQL Server and/or Microsoft Windows NT Server software. You may also make copies of the SOFTWARE PRODUCT for backup and archival purposes.

2. RESTRICTIONS.

--You must maintain all copyright notices on all copies of the SOFTWARE PRODUCT.

--You may not distribute copies of the SOFTWARE PRODUCT to third parties.

--You may not rent, lease or lend the SOFTWARE PRODUCT.

--You may not use the SOFTWARE PRODUCT or any derivative works thereof to internally test database management system software other than Microsoft SQL Server and/or operating system software other than Microsoft Windows NT.

-- You may not disclose the results of any benchmark tests using the SOFTWARE PRODUCT to any third party without Microsoft's prior written approval.

-- You may not disclose or provide the SOFTWARE PRODUCT or any derivative works thereof, or any information relating to the SOFTWARE PRODUCT (including the existence of the SOFTWARE PRODUCT or the results of use and testing or benchmark testing), to any third party without Microsoft's written permission.

3. TERMINATION. Without prejudice to any other rights, Microsoft may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT.

4. COPYRIGHT. All title and copyrights in and to the SOFTWARE PRODUCT and any copies thereof are owned by Microsoft or its suppliers. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT is the property of the respective content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants you no rights to use such content.

5. UPGRADES. If the SOFTWARE PRODUCT is labeled as an upgrade, you must be properly licensed to use a product identified by Microsoft as being eligible for the upgrade in order to use the SOFTWARE PRODUCT. A SOFTWARE PRODUCT labeled as an upgrade replaces and/or supplements the product that formed the basis for your eligibility for the upgrade. You may use the resulting upgraded product only in accordance with the terms of this EULA.

6. U.S. GOVERNMENT RESTRICTED RIGHTS.

The SOFTWARE PRODUCT is provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, WA 98052-6399.

7. EXPORT RESTRICTIONS.

You agree that you will not export or re-export the SOFTWARE PRODUCT to any country, person, entity or end user subject to U.S.A. export restrictions. Restricted countries currently include, but are not necessarily limited to Cuba, Iran, Iraq, Libya, North Korea, Syria, and the Federal Republic of Yugoslavia (Serbia and Montenegro, U.N. Protected Areas and areas of Republic of Bosnia and Herzegovina under the control of Bosnian Serb forces). You warrant and represent that neither the U.S.A. Bureau of Export Administration nor any other federal agency has suspended, revoked or denied your export privileges.

8. NO WARRANTY. ANY USE OF THE SOFTWARE PRODUCT IS AT YOUR OWN RISK. THE SOFTWARE PRODUCT IS PROVIDED FOR USE ONLY WITH MICROSOFT SQL SERVER AND/OR MICROSOFT WINDOWS NT SERVER SOFTWARE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MICROSOFT AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT.

9. NO LIABILITY FOR CONSEQUENTIAL DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL MICROSOFT OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT, EVEN IF MICROSOFT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

10. LIMITATION OF LIABILITY. MICROSOFT'S ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY UNDER THIS EULA SHALL NOT EXCEED FIVE DOLLARS (US\$5.00).

11. MISCELLANEOUS

This EULA is governed by the laws of the State of Washington, U.S.A.

Should you have any questions concerning this EULA, or if you desire to contact Microsoft for any reason, please contact the Microsoft subsidiary serving your country, or write:

Microsoft Sales Information Center/One Microsoft Way/Redmond, WA 98052-6399.

Si vous avez acquis votre produit Microsoft au CANADA, la garantie limitée suivante vous concerne:

EXCLUSION DE GARANTIES. Microsoft renonce entièrement ... toute garantie pour le LOGICIEL. Le LOGICIEL et toute autre documentation s'y rapportant sont fournis ® comme tels - sans aucune garantie quelle qu'elle soit, expresse ou implicite, y compris, mais ne se limitant pas aux garanties implicites de la qualité, marchande ou un usage particulier. Le risque total d'écoulement de l'utilisation ou de la

performance du LOGICIEL est entre vos mains.

RESPONSABILITÉ LIMITÉE. La seule obligation de Microsoft et votre recours exclusif concernant ce contrat n'excluront pas cinq dollars (US\$5.00).

ABSENCE DE RESPONSABILITÉ POUR LES DOMMAGES INDIRECTS.

Microsoft ou ses fournisseurs ne pourront être tenus responsables en aucune circonstance de tout dommage quel qu'il soit (y compris mais non de façon limitative les dommages directs ou indirects causés par la perte de bénéfices commerciaux, l'interruption des affaires, la perte d'information commerciale ou toute autre perte pécuniaire) résultant de l'utilisation ou de l'impossibilité d'utilisation de ce produit, et ce, même si la société, Microsoft a, à l'avance, avisé de l'éventualité de tels dommages. Certains États/juridictions ne permettent pas l'exclusion ou la limitation de responsabilité, relative aux dommages indirects ou consécutifs, et la limitation ci-dessus peut ne pas s'appliquer dans votre pays. La présente Convention est régie par les lois de la province d'Ontario, Canada. Chacune des parties ... la présente reconnaît irrévocablement la compétence des tribunaux de la province d'Ontario et consent ... instituer tout litige qui pourrait découler de la présente auprès des tribunaux situés dans le district judiciaire de York, province d'Ontario. Au cas où vous auriez des questions concernant cette licence ou que vous désiriez vous mettre en rapport avec Microsoft pour quelque raison que ce soit, veuillez contacter la succursale Microsoft desservant votre pays, dont l'adresse est fournie dans ce produit, ou écrire ... : Microsoft Customer Sales and Service, One Microsoft Way, Redmond, Washington 98052 6399.

mon_client.c

```
/*
 *      mon_client.c
 *
 */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <stdarg.h>
#include <time.h>
#include <pthread.h>
#include <tpm/mon/mon.h>
#include <utils/trace.h>
#include "../include/delivery.h"
#include "../include/neworder.h"
#include "../include/payment.h"
#include "../include/stocklevel.h"
#include "../include/orderstatus.h"
#include "../include/tpcc_type.h"
#include "mon_client.h"
#include "client_utils.h"

extern total_tran_count_t *perfCntDataInit();
static void read_mon_environment(void);

static char *cellName;
static int envRetrieval = 0;
static int useSecurity = FALSE;
static CRITICAL_SECTION init_lock;
static total_tran_count_t *pClientInfo=NULL; /* keep stats for the client process */
static num_active_threads = 0;
```

```
static int iStatsFrequency = 1;
FILE *errtpcc;
char *errFile = "C:/temp/tpcc_encina.out";
enc_status_t enc_status;

#define NewOrder_code NEWO_TRANS
#define Payment_code PAYMENT_TRANS
#define OrderStatus_code ORDER_STAT_TRANS
#define Delivery_code DELIVERY_TRANS
#define StockLevel_code STOCK_TRANS

#define INT_ENV_VALUE(var, default) \
    (var = getenv(#var) ? atoi(getenv(#var)) : default)

#define PRE_RPC_WORK(headerP, tran, sub_tran) \
    if (iStatsFrequency > 0) \
        pre_rpc(headerP, tran, sub_tran); \
    else \
        (headerP->stats = 0;
#define POST_RPC_WORK(headerP, tran) \
    if (iStatsFrequency > 0) \
        post_rpc(headerP, tran)

/* CALTPCC
 * Macro to sends 1 RPC and then handles any errors.
 *
 * The macro takes the name of the RPC (e.g., NewOrder)
 * and makes the RPC by calling the appropriate function
 * (e.g., impTPCCNewOrder).
 */
#define CALLTPCC(name,length,dataP,header,trpcStatusP) \
{ \
    UTIL_CONCAT(impTPCC,name)(length,dataP,&header,trpcStatusP); \
    if (*(trpcStatusP)) { \
        char msg[100]; \
        sprintf(msg, "TRPC error during impTPCC%s", UTIL_STRING(name)); \
        header.returncode = TRPC_ERROR; \
        encina_error_message(msg, *(trpcStatusP)); \
    } else if ((header.returncode != TPCC_SUCCESS) && \
        (header.returncode != INVALID_NEWO)) { \
        char msg[100]; \
        sprintf(msg, "App error during impTPCC%s: ", UTIL_STRING(name)); \
        encina_error_message(msg, header.returncode); \
    } \
}

/*
 * pre_rpc -- For debug purposes
 *
 * Called before an RPC is made.
 * Set the state of the thread and keep track of the time the RPC is sent.
 * This is used by the Background thread to report the state of the client.
 */
static void pre_rpc(data_header *headerP,
                    int tran_type,
                    int sub_tran_type)
{
    if (iStatsFrequency < 1) {
        headerP->stats = 0;
    } else {
        int num;
        num = ++ (pClientInfo->tran[tran_type].num);
        headerP->stats = (num % iStatsFrequency==0) ? 1 : 0;
        if (headerP->stats)
            { /* measure the time for RT */
                get_local_time(&headerP->clnt_start);
            }
    }
}
```

```

        headerP->srv_start.sec = 0; /* initialize the server time
*/
        headerP->srv_start.usec = 0;
        headerP->srv_end.sec = 0;
        headerP->srv_end.usec = 0;
    }
}

/*
 * post_rpc
 *
 * Called when the RPC returns from the server
 *
 * Keeps track of the client response time and the server response time
 * as well as the state of the thread. This is used by the background
 * debug thread to report the state of the client
 */
static void post_rpc(data_header *headerP,
                    int tran_type)
{
    double time_diff;
    int tran_failed;
    struct timeval start_time, end_time;

    if (headerP->stats)
        get_local_time(&headerP->clnt_end);
    else
        return;

    /* Store the info for each client.
     * Note: Since we don't use mutex for performance reason, pClientInfo
     * may not be accurate if more than one thread work on the same
     * data at a same time. But this should give us reasonable info.
     */
    if ((headerP->returncode == TPCC_SUCCESS) ||
        (headerP->returncode == INVALID_NEWO)) {
        tran_failed = 0;
    } else {
        pClientInfo->tran[tran_type].errs ++;
        pClientInfo->errors ++;
        tran_failed = 1;
    }
    if (headerP->stats && tran_type <= MAX_TRAN_TYPE && tran_type > 0
        && !tran_failed) {
        /* update total server round trip response time */
        start_time.tv_sec = headerP->srv_start.sec;
        start_time.tv_usec = headerP->srv_start.usec;
        end_time.tv_sec = headerP->srv_end.sec;
        end_time.tv_usec = headerP->srv_end.usec;
        time_diff = time_diff_ms(&end_time, &start_time);
        pClientInfo->tran[tran_type].RTtotal[1] += time_diff;
        DPRINT(("srv start_time %d.%d, end_time %d.%d, time_diff
%f\n",
                start_time.tv_sec, start_time.tv_usec,
                end_time.tv_sec, end_time.tv_usec,
                time_diff));

        /* update total client round trip response time */
        start_time.tv_sec = headerP->clnt_start.sec;
        start_time.tv_usec = headerP->clnt_start.usec;
        end_time.tv_sec = headerP->clnt_end.sec;
        end_time.tv_usec = headerP->clnt_end.usec;
        time_diff = time_diff_ms(&end_time, &start_time);
        pClientInfo->tran[tran_type].RTtotal[0] += time_diff;
        DPRINT(("clnt start_time %d.%d, end_time %d.%d, time_diff
%f\n",
                start_time.tv_sec, start_time.tv_usec,
                end_time.tv_sec, end_time.tv_usec,
                time_diff));
    }
}

/* update num for the number of trans which have RT measured */
pClientInfo->tran[tran_type].RTcount ++;
}

/*
 * The following send_*** functions are called from CTPCC_ENCINA class.
 */

/*
 * send_new_order
 *
 * Send a new order request to the server
 */
int send_new_order(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, NEWO_TRANS, 0);
    CALLTPCC(NewOrder,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, NEWO_TRANS);
    if (header.returncode == INVALID_NEWO)
        return TPCC_SUCCESS;
    else
        return header.returncode;
}

/*
 * send_payment
 *
 * Send a payment request to the server
 */
int send_payment(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, PAYMENT_TRANS, 0);
    CALLTPCC(Payment,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, PAYMENT_TRANS);
    return header.returncode;
}

/*
 * send_order_status
 *
 * Send a order status request to the server
 */
int send_order_status(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, ORDER_STAT_TRANS, 0);
    CALLTPCC(OrderStatus,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, ORDER_STAT_TRANS);
    return header.returncode;
}

/*
 * send_delivery
 *
 * Send a delivery request to the server
 */
int send_delivery(long length, unsigned char *dataP)
{

```



```

trpc_status_t trpcStatus;
data_header header;

PRE_RPC_WORK(&header, DELIVERY_TRANS, 0);
CALLTPCC(Delivery,length,dataP,header,&trpcStatus);
POST_RPC_WORK(&header, DELIVERY_TRANS);
return header.returncode;
}

/*
 * send_stock_level
 *      Send a stock level request to the server
 */
int send_stock_level(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, STOCK_TRANS, 0);
    CALLTPCC(StockLevel,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, STOCK_TRANS);
    return header.returncode;
}

/*
 * Enroll the client:
 *      get the necessary handles.
 * This function should be called only once. Use static var client_enrolled to
 * control it.
 */
void enroll_client()
{
    static char *clientName="tpcc_client";
    unsigned long status ;
    static int client_enrolled = 0;
    unsigned32    client_authnLevel;
    unsigned32    client_authzSvc;
    time_type a_time;
    char err_msg[100];

    MUTEX_INIT(&init_lock);
    get_local_time(&a_time);
    srand(a_time.sec ^ a_time.usec);

    MUTEX_LOCK(&init_lock);
    if (client_enrolled) {
        MUTEX_UNLOCK(&init_lock);
        return;
    }

    /* open output file for tracing */
    errtpcc = fopen(errFile, "w");
    if(!errtpcc)
    {
        sprintf(err_msg, "Cannot open file %s", errFile);
        CHK_STATUS(1,
        ERROUT_FILE_NOT_FOUND,err_msg);
    }

    get_time_init();
    // initialize the space for perfmon
    pClientInfo = perfCntDataInit();
    if (pClientInfo == NULL) // in case something wrong
        pClientInfo = malloc(sizeof(total_tran_count_t));
    memset(pClientInfo, 0, sizeof(total_tran_count_t));

```

```

read_mon_environment();

if(!cellName)
    CHK_STATUS(30, CELL_NAME_UNAVAILABLE,
    "ENCINA_TPM_CELL is not set!");

if (useSecurity) {
    client_authnLevel = rpc_c_protect_level_connect;
    client_authzSvc = rpc_c_authz_dce;
} else {
    client_authnLevel = rpc_c_protect_level_none;
    client_authzSvc = rpc_c_authz_none;
}

if (envRetrieval == 0) {
ENCINA_CALL_RC("mon_RetrieveEnable",mon_RetrieveEnable(FALSE),sta
tus);
    CHK_STATUS(status, MON_RETRIEVEENABLE_FAILED,
    "mon_RetrieveEnable failed");
}

err_printf("enroll_client: calling mon_InitClient\n");

ENCINA_CALL_RC("mon_InitClient",mon_InitClient(clientName,cellName),
status);
    CHK_STATUS(status, MON_INITCLIENT_FAILED,
    "mon_InitClient failed");

DPRINT(("mon_SecuritySetDefaults-> authn %d, authz %d\n",
    client_authnLevel, client_authzSvc));
ENCINA_CALL_RC("mon_SecuritySetDefaults",

mon_SecuritySetDefaults(client_authnLevel,client_authzSvc),
status);
    CHK_STATUS(status, MON_SECURITYSET_FAILED,
    "mon_SecuritySetDefaults failed");

ENCINA_CALL_RC("mon_SetHandleCacheRefreshInterval",
    mon_SetHandleCacheRefreshInterval(300), status);
    CHK_STATUS(status, MON_SETREFRESHINTERVAL_FAILED,
    "mon_SetHandleCacheRefreshInterval failed");

{
    dbInfo_data_t data;
    trpc_status_t trpcStatus;
    /* Get DB Info -- currently id does not do anything
    but it will tell us if there is a server out there.
    Better to know instead of when all the terminals
    are up and ready
    */
    impTPCCNOInfo(&data, &trpcStatus);
    if (trpcStatus) {
        char msg[100];
        sprintf(msg, "TRPC error during db info at init.");
        encina_error_message(msg, trpcStatus);
        CHK_STATUS(33,NOINFO_TRPC_ERROR,
        "TRPC error during db info at init");
    }
}

client_enrolled = 1;
MUTEX_UNLOCK(&init_lock);
err_printf("end of enroll_client\n");
}

/*-----*/

```

```

/* Read environment paramaters and registry entries */
/*-----*/
static void read_mon_environment()
{
    char *env_str;
    char *registryKey = "SOFTWARE\\TransarcCorporation\\TxTpc";
    HKEY hKey;
    DWORD size;
    DWORD type;
    char szTmp[256];

    cellName = getenv("ENCINA_TPM_CELL");
    CHECK_ENVIRON(cellName, "ENCINA_TPM_CELL");

    if (env_str = getenv("TPCC_ENV_RETRIEVE")) {
        envRetrieval = atoi(env_str);
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE, registryKey, 0,
KEY_READ, &hKey) != ERROR_SUCCESS )
        return;

    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "StatsFrequency", 0, &type, szTmp,
&size)==ERROR_SUCCESS)
        iStatsFrequency = atoi(szTmp);

    RegCloseKey(hKey);
}

```

mon_client.h

```

/*
 * mon_client.h
 */

#ifndef MON_CLIENT_H
#define MON_CLIENT_H

#define MUTEX_T CRITICAL_SECTION
#define MUTEX_LOCK(a) EnterCriticalSection(a)
#define MUTEX_UNLOCK(a) LeaveCriticalSection(a)
#define MUTEX_INIT(mut) InitializeCriticalSection(mut)
#define MUTEX_DESTROY(mut) DeleteCriticalSection(mut)
#define ERROUT errtpcc

/*initialization status */
#define INIT_SUCCESS 0
#define INIT_FAILED 1
#define CELL_NAME_UNAVAILABLE 2
#define MON_RETRIEVEENABLE_FAILED 3
#define MON_INITCLIENT_FAILED 4
#define MON_SECURITYSET_FAILED 5
#define MON_SETREFRESHINTERVAL_FAILED 6
#define NOINFO_TRPC_ERROR 7
#define ENROLL_CLIENT_EXCEPTION 8
#define ERROUT_FILE_NOT_FOUND 9
#define LOG_FILE_NOT_FOUND 10
#define TPCC_KEY_NOT_FOUND 11
#define TERM_ALLOC_FAILED 12

/*
 * Routines and declarations that are common to all clients
 */
#ifdef __cplusplus
extern "C" {

```

```

#endif
int send_new_order(long, unsigned char *);
int send_payment(long, unsigned char *);
int send_order_status(long, unsigned char *);
int send_delivery(long, unsigned char *);
int send_stock_level(long, unsigned char *);
void enroll_client();
#ifdef __cplusplus
}
#endif

#endif /* MON_CLIENT_H */

```

ReadRegistry.cpp

```

/* FILE: READREGISTRY.CPP
 * Microsoft TPC-C Kit Ver.
 * 4.20.000
 * Copyright Microsoft, 1999
 * All Rights Reserved
 *
 * not yet audited
 *
 * PURPOSE: Implementation for TPC-C Tuxedo class.
 * Contact: Charles Levine (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - first version
 */

/* FUNCTION: ReadTPCCRegistrySettings
 *
 * PURPOSE: This function reads the NT registry for startup
parameters. There parameters are
 * under the TPCC key.
 *
 * RETURNS FALSE = no errors
 * TRUE = error reading registry
 */
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg )
{
    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
        return TRUE;

    // determine database protocol to use; may be either ODBC or
DBLIB
    pReg->eDB_Protocol = Unspecified;
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "DB_Protocol", 0, &type, (BYTE
*)&szTmp, &size) == ERROR_SUCCESS )
    {
        if ( !strcmp(szTmp, szDBNames[ODBC]) )
            pReg->eDB_Protocol = ODBC;
        else if ( !strcmp(szTmp, szDBNames[DBLIB]) )
            pReg->eDB_Protocol = DBLIB;
    }

    pReg->eTxnMon = None;

```

```

// determine txn monitor to use; may be either TUXEDO, or blank
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "TxnMonitor", 0, &type, (BYTE
*)&szTmp, &size) == ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, szTxnMonNames[TUXEDO]) )
        pReg->eTxnMon = TUXEDO;
    else if ( !strcmp(szTmp, szTxnMonNames[ENCINA]) )
        pReg->eTxnMon = ENCINA;
    else if ( !strcmp(szTmp, szTxnMonNames[COM]) )
        pReg->eTxnMon = COM;
}

pReg->bCOM_SinglePool = FALSE;
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "COM_SinglePool", 0, &type, (BYTE
*)&szTmp, &size) == ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, "YES") )
        pReg->bCOM_SinglePool = TRUE;
}

pReg->dwMaxConnections = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "MaxConnections", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxConnections = dwTmp;

pReg->dwMaxPendingDeliveries = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "MaxPendingDeliveries", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwMaxPendingDeliveries = dwTmp;

pReg->dwNumberOfDeliveryThreads = 0;
size = sizeof(dwTmp);
if ( ( RegQueryValueEx(hKey, "NumberOfDeliveryThreads", 0,
&type, (LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
    pReg->dwNumberOfDeliveryThreads = dwTmp;

size = sizeof( pReg->szPath );
if ( RegQueryValueEx(hKey, "Path", 0, &type, (BYTE
*)&pReg->szPath, &size) != ERROR_SUCCESS )
    pReg->szPath[0] = 0;

size = sizeof( pReg->szDbServer );
if ( RegQueryValueEx(hKey, "DbServer", 0, &type, (BYTE
*)&pReg->szDbServer, &size) != ERROR_SUCCESS )
    pReg->szDbServer[0] = 0;

size = sizeof( pReg->szDbName );
if ( RegQueryValueEx(hKey, "DbName", 0, &type, (BYTE
*)&pReg->szDbName, &size) != ERROR_SUCCESS )
    pReg->szDbName[0] = 0;

size = sizeof( pReg->szDbUser );
if ( RegQueryValueEx(hKey, "DbUser", 0, &type, (BYTE
*)&pReg->szDbUser, &size) != ERROR_SUCCESS )
    pReg->szDbUser[0] = 0;

size = sizeof( pReg->szDbPassword );
if ( RegQueryValueEx(hKey, "DbPassword", 0, &type, (BYTE
*)&pReg->szDbPassword, &size) != ERROR_SUCCESS )
    pReg->szDbPassword[0] = 0;

```

```
RegCloseKey(hKey);
```

```
return FALSE;
```

ReadRegistry.h

```

/* FILE: ReadRegistry.h
Microsoft TPC-C Kit Ver.
4.20.000
Copyright Microsoft, 1999
All Rights Reserved
not audited
PURPOSE: Header for registry related code.
Change history:
4.20.000 - first version
*/

enum DBPROTOCOL { Unspecified, ODBC, DBLIB };
const char *szDBNames[] = { "Unspecified", "ODBC", "DBLIB" };

enum TXNMON { None, TUXEDO, ENCINA, COM };
const char *szTxnMonNames[] = { "NONE", "TUXEDO", "ENCINA", "COM"
};

//This structure defines the data necessary to keep distinct for each terminal or
client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbServer[32];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg );

Resource.h

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//
#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TPCCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108
#define IDR_LICENSE1 112
#define IDD_DIALOG4 113
#define IDR_TPCCOBJ1 117
#define IDR_TPCCSTUB1 118

```

```

#define IDR_DBLIB_DLL          122
#define IDR_ODBC_DLL          123
#define IDR_TUXEDO_APP        124
#define IDR_TUXEDO_DLL        125
#define IDR_COM_DLL           126
#define IDR_COMPS_DLL         127
#define IDR_COMALL_DLL        128
#define IDR_COMTYPLIB_DLL     129
#define BN_LOG                 1001
#define ED_KEEP                1002
#define ED_THREADS             1003
#define ED_THREADS2            1004
#define IDC_PATH               1007
#define IDC_VERSION            1009
#define IDC_RESULTS            1010
#define IDC_PROGRESS1          1011
#define IDC_STATUS             1012
#define IDC_BUTTON1            1013
#define ED_MAXCONNECTION      1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_MAXDELIVERIES      1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB              1021
#define IDC_LICENSE            1022
#define IDC_ODBC               1022
#define IDC_CONNECT_POOL      1023
#define ED_DB_SERVER           1023
#define ED_USER_CONNECT_DELAY_TIME 1024
#define ED_DB_USER_ID         1024
#define IDC_MTS                1025
#define IDC_TM_MTS             1025
#define IDC_TM_TUXEDO          1026
#define IDC_TM_NONE            1027
#define ED_DB_PASSWORD         1028
#define ED_DB_NAME             1029
#define IDC_TM_ENCINA          1030

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 130
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1031
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif
#endif

```

Resource_tpsc_rc.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1            101

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

```
#endif
```

rtetime.h

```

/* FILE: rtetime.h : header file
 * Copyright 1997 Microsoft Corp., All rights reserved.
 *
 * Authors: Charles Levine, Philip Durr
 *
 * Microsoft Corp.
 */

#define MAX_JULIAN_TIME
0x7FFFFFFF
#define JULIAN_TIME           _int64
#define TC_TIME               DWORD
extern "C"
{
    BOOL          InitJulianTime(LPSYSTEMTIME lpInitTime);
    JULIAN_TIME   GetJulianTime(void);
    DWORD         MyTickCount(void);
    void          GetJulianAndTC(JULIAN_TIME *pJulian, DWORD
    *pTC);
    JULIAN_TIME   ConvertTo64BitTime(int iYear, int iMonth, int iDay, int
    iHour, int iMinute, int iSecond);
    JULIAN_TIME   Get64BitTime(LPSYSTEMTIME lpInitTime);
    int           JulianDay( int yr, int mm, int dd );
    void          JulianToTime(JULIAN_TIME julianTS, int* yr, int*
    mm, int* dd, int *hh, int *mi, int *ss );
    void          JulianToCalendar( int day, int* yr, int* mm, int* dd );
}

```

spinlock.h

```

/* FILE: SPINLOCK.H
 *
 * Copyright 1997 Microsoft Corp., All rights reserved.
 *
 * Authors: Mike Parkes, Charles Levine, Philip Durr
 *
 * Microsoft Corp.
 */

#ifdef _INC_Spinlock

    const LONG LockClosed      = 1;
    const LONG LockOpen       = 0;

/*****
 *
 * Spinlock and Semaphore locking.
 *
 * This class provides a very conservative locking scheme.
 * The assumption behind the code is that locks will be
 * held for a very short time. When a lock is taken a memory
 * location is exchanged. All other threads that want this
 * lock wait by spinning and sometimes sleeping on a semaphore
 * until it becomes free again. The only other choice is not
 * to wait at all and move on to do something else. This
 * module should normally be used in conjunction with cache
 * aligned memory in minimize cache line misses.
 *
 *****/

class Spinlock
{

```

```

// Private data.
HANDLE Semaphore;
volatile LONG m_Spinlock;
volatile LONG Waiting;

#ifdef _DEBUG
// Counters for debugging builds.
volatile LONG TotalLocks;
volatile LONG TotalSleeps;
volatile LONG TotalSpins;
volatile LONG TotalWaits;
#endif

public:
// Public functions.

Spinlock( void );

inline BOOL ClaimLock( BOOL Wait =
TRUE );

inline void ReleaseLock( void );
~Spinlock( void );
// Disabled operations.
Spinlock( const Spinlock & Copy );
void operator=( const Spinlock & Copy );

private:
// Private functions.
inline BOOL ClaimSpinlock( volatile LONG
*sl );

void WaitForLock( void );
void WakeAllSleepers( void );

};

/*****
*
* A guaranteed atomic exchange.
*
* An attempt is made to claim the Spinlock. This action is
* guaranteed to be atomic.
*
*****/

inline BOOL Spinlock::ClaimSpinlock( volatile LONG *Spinlock )
{
#ifdef _DEBUG
InterlockedIncrement( (LPLONG) &
TotalLocks );
#endif
return ( (*Spinlock) == LockOpen ) &&
( InterlockedExchange( (LPLONG)Spinlock, LockClosed ) == LockOpen );
}

/*****
*
* Claim the Spinlock.
*
* Claim the lock if available else wait or exit.
*
*****/

inline BOOL Spinlock::ClaimLock( BOOL Wait )
{
if ( ! ClaimSpinlock( (volatile LONG*) & m_Spinlock ) )
{
if ( Wait )

```

```

WaitForLock();
return Wait;
}
return TRUE;
}

/*****
*
* Release the Spinlock.
*
* Release the lock and if needed wakeup any sleepers.
*
*****/

inline void Spinlock::ReleaseLock( void )
{
m_Spinlock = LockOpen;
if ( Waiting > 0 )
WakeAllSleepers();
}

#define _INC_Spinlock
#endif

tpcc.cpp

/* FILE: TPCC.C
* Microsoft TPC-C Kit Ver.
4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
*
* Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
* PURPOSE: Main module for TPCC.DLL which is an
ISAPI service dll.
* Contact: Charles Levine (clevine@microsoft.com)
*
* Change history:
* 4.20.000 - reworked error handling; added options for
COM and Encina txn monitors
*/

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

```

```

#include "..\..\common\src\trans.h" //tpckit transaction
header contains definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"

#include "..\..\common\txnlog\include\rtetime.h"
#include "..\..\common\txnlog\include\spinlock.h"
#include "..\..\common\txnlog\include\txnlog.h"

// Database layer includes
#include "..\..\db_dblib_dll\src\tpcc_dblib.h" // DBLIB
implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h" // ODBC
implementation of TPC-C txns

// Txn monitor layer includes
#include "..\..\tm_com_dll\src\tpcc_com.h" // COM
Services implementation on TPC-C txns
#include "..\..\tm_tuxedo_dll\src\tpcc_tux.h" // interface to Tuxedo
libraries
#include "..\..\tm_encina_dll\src\tpcc_enc.h" // interface to Encina
libraries

#include "httpext.h" //ISAPI DLL
information header
#include "tpcc.h" //this dlls
specific structure, value e.t. header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char
szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version level of this web
client interface.
// The RTE must be synchronized with the interface level on login, otherwise
the login
// will fail. This is a sanity check to catch problems resulting from mismatched
versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "410"

static CRITICAL_SECTION TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_TUXEDO *pCTPCC_TUXEDO_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_post_init;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog *txnDelilog = NULL;
//used to log delivery transaction information

HANDLE hWorkerSemaphore =
INVALID_HANDLE_VALUE;
HANDLE hDoneEvent
= INVALID_HANDLE_VALUE;
HANDLE *pDeliHandles
= NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD
dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection;
//critical section for delivery transactions cache
DELIVERY_TRANSACTION *pDelBuff = NULL;
DWORD dwDelBuffSize
= 100; // size of circular buffer for delivery txns
DWORD dwDelBuffFreeCount;
// number of buffers free
DWORD dwDelBuffBusyIndex =
0; // index position of entry waiting to be delivered
DWORD dwDelBuffFreeIndex =
0; // index position of unused entry

#include "..\..\common\src\ReadRegistry.cpp"

/* FUNCTION: DIIMain
*
* PURPOSE: This function is the entry point for the DLL. This
implementation is based on the
* fact that DLL_PROCESS_ATTACH is only
called from the inet service once.
*
* ARGUMENTS: HANDLE hModule
module handle
DWORD ul_reason_for_call
reason for call
LPVOID lpReserved
reserved for future use
*
* RETURNS: BOOL FALSE
errors occurred in initialization
TRUE
DLL successfully initialized
*/

BOOL WINAPI DIIMain(HANDLE hModule, DWORD ul_reason_for_call,
LPVOID lpReserved)
{
DWORD i;
char szEvent[LEN_ERR_STRING] = "\0";
char szLogFile[128];
char szDllName[128];

// debugging...
// DebugBreak();

try
{
switch(ul_reason_for_call)
{
case DLL_PROCESS_ATTACH:
DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;
GetComputerName(szMyComputerName, &dwSize);

```

```

szMyComputerName[dwSize] = 0;
    }

DisableThreadLibraryCalls((HMODULE)hModule);

InitializeCriticalSection(&TermCriticalSection);

    if ( ReadTPCCRegistrySettings(
&Reg ) )
        throw new
CWEBCLNT_ERR( ERR_MISSING_REGISTRY_ENTRIES );

        dwDelBuffSize = min(
Reg.dwMaxPendingDeliveries, 10000 ); // min with 10000 as a sanity
constraint
        dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with 100 as a sanity constraint

        TermInit();

        // load DLL for txn monitor
        if (Reg.eTxnMon == TUXEDO)
        {
            strcpy( szDllName,
Reg.szPath );
            strcat( szDllName,
"tpcc_tuxedo.dll");
            LoadLibrary( szDllName );
            if (hLibInstanceTm ==
NULL)
                throw new
CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );

            // get function pointer
            to wrapper for class constructor

            pCTPCC_TUXEDO_new = (TYPE_CTPCC_TUXEDO*)
            GetProcAddress(hLibInstanceTm,"CTPCC_TUXEDO_new");
            if
            (pCTPCC_TUXEDO_new == NULL)
                throw new
CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
GetLastError() );
        }
        else if (Reg.eTxnMon ==
ENCINA)
        {
            strcpy( szDllName,
Reg.szPath );
            strcat( szDllName,
"tpcc_encina.dll");
            LoadLibrary( szDllName );
            if (hLibInstanceTm ==
NULL)
                throw new
CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );

            // get function pointer
            to wrapper for class constructor

            pCTPCC_ENCINA_new = (TYPE_CTPCC_ENCINA*)
            GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_new");

            pCTPCC_ENCINA_post_init = (TYPE_CTPCC_ENCINA*)
            GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_post_init");

```

```

            if
            (pCTPCC_ENCINA_new == NULL)
                throw new
CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
GetLastError() );
        }
        else if (Reg.eTxnMon == COM)
        {
            strcpy( szDllName,
Reg.szPath );
            strcat( szDllName,
"tpcc_com.dll");
            LoadLibrary( szDllName );
            if (hLibInstanceTm ==
NULL)
                throw new
CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );

            // get function pointer
            to wrapper for class constructor
            pCTPCC_COM_new =
            (TYPE_CTPCC_COM*)
            GetProcAddress(hLibInstanceTm,"CTPCC_COM_new");
            if
            (pCTPCC_COM_new == NULL)
                throw new
CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
GetLastError() );
        }

        // load DLL for database
        connection
        if ((Reg.eTxnMon == None) ||
(dwNumDeliveryThreads > 0))
        {
            if (Reg.eDB_Protocol
== DBLIB)
            {
                strcpy(
szDllName, Reg.szPath );
                strcat(
szDllName, "tpcc_dblib.dll");
                hLibInstanceDb = LoadLibrary( szDllName );
                if
                (hLibInstanceDb == NULL)
                    throw new CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName,
                    GetLastError() );

                // get
                function pointer to wrapper for class constructor

                pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
                GetProcAddress(hLibInstanceDb,"CTPCC_DBLIB_new");
                if
                (pCTPCC_DBLIB_new == NULL)
                    throw new CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
                    GetLastError() );
            }
            else if
            {
                strcpy(
szDllName, Reg.szPath );

```

<pre> szDllName, "tpcc_odbc.dll"); hLibInstanceDb = LoadLibrary(szDllName); (hLibInstanceDb == NULL) throw new CWEBCLNT_ERR(ERR_LOADDLL_FAILED, szDllName, GetLastError()); function pointer to wrapper for class constructor pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*) GetProcAddress(hLibInstanceDb,"CTPCC_ODBC_new"); (pCTPCC_ODBC_new == NULL) throw new CWEBCLNT_ERR(ERR_GETPROCADDR_FAILED, szDllName, GetLastError()); } if (dwNumDeliveryThreads) { // for deferred delivery txns: hDoneEvent = CreateEvent(NULL, TRUE /* manual reset */, FALSE /* initially not signalled */, NULL); InitializeCriticalSection(&DelBuffCriticalSection); hWorkerSemaphore = CreateSemaphore(NULL, 0, dwDelBuffSize, NULL); dwDelBuffFreeCount = dwDelBuffSize; InitJulianTime(NULL); // create unique log file name based on delilog-yymmdd-hhmm.log SYSTEMTIME Time; GetLocalTime(&Time); wsprintf(szLogFile, "%sdelivery-%2.2d%2.2d%2.2d-%2.2d%2.2d.log", Reg.szPath, Time.wYear % 100, Time.wMonth, Time.wDay, Time.wHour, Time.wMinute); CTxnLog(szLogFile, TXN_LOG_WRITE); //write event into txn log for START txnDelilog->WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName, sizeof(szMyComputerName)); // allocate structures for delivery buffers and thread mgmt pDeliHandles = new HANDLE[dwNumDeliveryThreads]; pDelBuff = new DELIVERY_TRANSACTION[dwDelBuffSize]; // launch DeliveryWorkerThread to perform actual delivery txns for(i=0; i<dwNumDeliveryThreads; i++) </pre>	<pre> strcat({ pDeliHandles[i] = (HANDLE) _beginthread(DeliveryWorkerThread, 0, NULL); if if (pDeliHandles[i] == INVALID_HANDLE_VALUE) throw new CWEBCLNT_ERR(ERR_DELIVERY_THREAD_FAILED); } } break; case DLL_PROCESS_DETACH: if (dwNumDeliveryThreads) { if (txnDelilog != NULL) { //write event into txn log for STOP txnDelilog->WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName, sizeof(szMyComputerName)); // This will do a clean shutdown of the delivery log file CTxnLog *txnDelilogLocal = txnDelilog; txnDelilog= NULL; delete txnDelilogLocal; } delete [] pDeliHandles; delete [] pDelBuff; CloseHandle(CloseHandle(DeleteCriticalSection(&DelBuffCriticalSection); } DeleteCriticalSection(&TermCriticalSection); if (hLibInstanceTm != NULL) FreeLibrary(hLibInstanceTm); hLibInstanceTm = NULL; if (hLibInstanceDb != NULL) FreeLibrary(hLibInstanceDb); hLibInstanceDb = NULL; Sleep(500); break; default: /* nothing */; } } catch (CBaseErr *e) { </pre>
---	---


```

        WriteMessageToEventLog( e->ErrorText() );
        delete e;
        TerminateExtension(0);
        return FALSE;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception. DLL could not load."));
        TerminateExtension(0);
        return FALSE;
    }

    return TRUE;
}

/* FUNCTION: GetExtensionVersion
*
* PURPOSE:      This function is called by the inet service when the DLL
is first loaded.
*
* ARGUMENTS:   HSE_VERSION_INFO      *pVer    passed in
structure in which to place expected version number.
*
* RETURNS:     TRUE      inet service expected return value.
*/

BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO *pVer)
{
    pVer->dwExtensionVersion =
    MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpy(pVer->lpszExtensionDesc, "TPC-C Server.",
HSE_MAX_EXT_DLL_NAME_LEN);

    // TODO: why do we need this here instead of in the DLL attach?
    if (Reg.eTxnMon == ENCINA)
        pCTPCC_ENCINA_post_init();

    return TRUE;
}

/* FUNCTION: TerminateExtension
*
* PURPOSE:      This function is called by the inet service when the DLL
is about to be unloaded.
*
*               Release all resources in anticipation of being
unloaded.
*
* RETURNS:     TRUE      inet service expected return value.
*/

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0; i<dwNumDeliveryThreads; i++)
            WaitForSingleObject( pDeliHandles[i],
INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc

```

```

*
* PURPOSE:      This function is the main entry point for the TPCC DLL.
The internet service
                calls this function passing in the http string.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK      *pECB
structure pointer to passed in internet
                service information.
*
* RETURNS:     DWORD HSE_STATUS_SUCCESS
connection can be dropped if error
*
HSE_STATUS_SUCCESS_AND_KEEP_CONN      keep connect valid
comment sent
*
* COMMENTS:    None
*/

DWORD WINAPI HttpExtensionProc(EXTENSION_CONTROL_BLOCK
*pECB)
{
    int                iCmd, FormId, TermId, iSyncId;
    char               szBuffer[4096];

    int                lpbSize;
    static char        szHeader[] = "200 Ok";
    DWORD              dwSize = 6;                // initial
value is strlen(szHeader)
    char               szHeader1[4096];

#ifdef ICECAP
    StartCAP();
#endif

    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd, &FormId, &TermId,
&iSyncId);

        if (TermId != 0)
        {
            if ( TermId < 0 || TermId >=
Term.iNumEntries || Term.pClientData[TermId].iNextFree != -1 )
            {
                // debugging...
                char szTmp[128];
                sprintf( szTmp, "Invalid term ID;
TermId = %d", TermId );
                WriteMessageToEventLog( szTmp

                throw new CWEBCLNT_ERR(
ERR_INVALID_TERMID );
            }

            //must have a valid syncid here since termid is
valid
            if (iSyncId !=
Term.pClientData[TermId].iSyncId)
                throw new CWEBCLNT_ERR(
ERR_INVALID_SYNC_CONNECTION );

            //set use time

```

```

        Term.pClientData[TermId].iTickCount =
GetTickCount();
    }

    switch(iCmd)
    {
    case 0:
        WelcomeForm(pECB, szBuffer);
        break;
    case 1:
        switch( FormId )
        {
            case WELCOME_FORM:
            case MAIN_MENU_FORM:
                break;
            case NEW_ORDER_FORM:
                ProcessNewOrderForm(pECB, TermId, szBuffer);
                break;
            case PAYMENT_FORM:
                ProcessPaymentForm(pECB, TermId, szBuffer);
                break;
            case DELIVERY_FORM:
                ProcessDeliveryForm(pECB, TermId, szBuffer);
                break;
            case ORDER_STATUS_FORM:
                ProcessOrderStatusForm(pECB, TermId, szBuffer);
                break;
            case STOCK_LEVEL_FORM:
                ProcessStockLevelForm(pECB, TermId, szBuffer);
                break;
        }
        break;
    case 2:
        // new-order selected from menu; display
        new-order input form
        INPUT_FORM, szBuffer);
        MakeNewOrderForm(TermId, NULL,
        break;
    case 3:
        // payment selected from menu; display
        payment input form
        INPUT_FORM, szBuffer);
        MakePaymentForm(TermId, NULL,
        break;
    case 4:
        // delivery selected from menu; display
        delivery input form
        INPUT_FORM, szBuffer);
        MakeDeliveryForm(TermId, NULL,
        break;
    case 5:
        // order-status selected from menu; display
        order-status input form
        INPUT_FORM, szBuffer);
        MakeOrderStatusForm(TermId, NULL,
        break;
    case 6:
        // stock-level selected from menu; display
        stock-level input form
        INPUT_FORM, szBuffer);
        MakeStockLevelForm(TermId, NULL,
        break;
    case 7:
        // ExitCmd
        TermDelete(TermId);
        WelcomeForm(pECB, szBuffer);
        break;
    case 8:
        SubmitCmd(pECB, szBuffer);
        break;
    case 9:
        // menu
        MakeMainMenuForm(TermId,
        Term.pClientData[TermId].iSyncId, szBuffer);
        break;
    case 10:
        // CMD=Clear
        // resets all connections; should only be used
        when no other connections are active
        TermDeleteAll();
        TermInit();
        WelcomeForm(pECB, szBuffer);
        break;
    case 11:
        // CMD=Stats
        StatsCmd(pECB, szBuffer);
        break;
    }
    catch (CBaseErr *e)
    {
        ErrorForm( pECB, e->ErrorType(), e->ErrorNum(),
        TermId, iSyncId, e->ErrorText(), szBuffer );
        delete e;
    }
    catch (...)
    {
        ErrorForm( pECB, ERR_TYPE_WEBDLL, 0, TermId,
        iSyncId, "Error: Unhandled exception in Web Client.", szBuffer );
    }
}

#ifdef ICECAP
    StopCAP();
#endif

    lpbSize = strlen(szBuffer);
    wsprintf(szHeader1,
        "Content-Type: text/html\r\n"
        "Content-Length: %d\r\n"
        "Connection: Keep-Alive\r\n\r\n", lpbSize);
    strcat( szHeader1, szBuffer );

    (*pECB->ServerSupportFunction)(pECB->ConnID,
    HSE_REQ_SEND_RESPONSE_HEADER, szHeader, (LPDWORD) &dwSize,
    (LPDWORD)szHeader1);

    //finish up and keep connection
    pECB->dwHttpStatusCode = 200;
    return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //

```

```

hEventSource = RegisterEventSource(NULL, TEXT("TPCC.DLL"));

_stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
lpszStrings[0] = szMsg;
lpszStrings[1] = lpszMsg;

if (hEventSource != NULL)
{
    ReportEvent(hEventSource, // handle of event source
    EVENTLOG_ERROR_TYPE, // event type
    0, // event category
    0, // event ID
    NULL, // current user's SID
    2, // strings in lpszStrings
    0, // no bytes of raw data
    (LPCTSTR *)lpszStrings, // array of error strings
    NULL); // no raw data

    (VOID) DeregisterEventSource(hEventSource);
}
}

/* FUNCTION: DeliveryWorkerThread
*
* PURPOSE: This function processes deferred delivery txns. There are
typically several
* threads running this routine. The number of
threads is determined by an entry
* read from the registry. The thread waits for
work by waiting on semaphore.
* When a delivery txn is posted, the semaphore
is released. After processing
* the delivery txn, information is logged to
record the txn status and execution
* time.
*/

/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE *pTxn = NULL;

    DELIVERY_TRANSACTION delivery;
    PDELIVERY_DATA
pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF txnDeliRec;

    DWORD index;
    HANDLE handles[2];

    SYSTEMTIME trans_end; //delivery
transaction finished time
    SYSTEMTIME trans_start; //delivery transaction
start time

    assert(txnDeliRec != NULL);

    try
    {
        if (Reg.eDB_Protocol == ODBC)
            pTxn = pCTPCC_ODBC_new(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword, szMyComputerName,
Reg.szDbName);
        else if (Reg.eDB_Protocol == DBLIB)
            pTxn = pCTPCC_DBLIB_new(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword, szMyComputerName,
Reg.szDbName);
        pDeliveryData = pTxn->BuffAddr_Delivery();

```

```

    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in Delivery Txn thread. Could
not connect to database. "
                "%s. Server=%s, User=%s,
                Password=%s, Database=%s",
                e->ErrorText(), Reg.szDbServer,
                Reg.szDbUser, Reg.szDbPassword, Reg.szDbName);
        WriteMessageToEventLog( szTmp);
        delete e;
        goto ErrorExit;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception
caught in DeliveryWorkerThread.));
        goto ErrorExit;
    }

    while (TRUE)
    {
        try
        {
            //while delivery thread running, i.e. user has
            not requested termination
            while (TRUE)
            {
                // need to wait for multiple objects:
                program exit or worker semaphore;
                handles[0] = hDoneEvent;
                handles[1] = hWorkerSemaphore;
                index = WaitForMultipleObjects(
                2, &handles[0], FALSE, INFINITE);
                if (index == WAIT_OBJECT_0)
                    goto ErrorExit;

                ZeroMemory(&txnDeliRec,
                sizeof(txnDeliRec));
                txnDeliRec.TxnType =
                TXN_REC_TYPE_TPCC_DELIV_DEF;

                // make a local copy of current
                entry from delivery buffer and increment buffer index
                EnterCriticalSection(&DelBuffCriticalSection);
                delivery =
                *(pDelBuff+dwDelBuffBusyIndex);
                dwDelBuffFreeCount++;
                dwDelBuffBusyIndex++;
                if (dwDelBuffBusyIndex ==
                dwDelBuffSize) // wrap-around if at end of buffer
                    dwDelBuffBusyIndex =
                    0;

                LeaveCriticalSection(&DelBuffCriticalSection);

                pDeliveryData->w_id =
                delivery.w_id;
                pDeliveryData->o_carrier_id =
                delivery.o_carrier_id;
                txnDeliRec.w_id =
                pDeliveryData->w_id;
                txnDeliRec.o_carrier_id =
                pDeliveryData->o_carrier_id;

```

```

Get64BitTime(&delivery.queue);
    txnDeliRec.TxnStartT0 =
        GetLocalTime( &trans_start );
        pTxn->Delivery();
        GetLocalTime( &trans_end );

        //log txn
        txnDeliRec.TxnStatus =
ERR_SUCCESS;
        for (int i=0; i<10; i++)
            txnDeliRec.o_id[i] =
pDeliveryData->o_id[i];
            txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) - txnDeliRec.TxnStartT0);
            txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) - Get64BitTime(&trans_start));

            if (txnDelilog != NULL)

txnDelilog->WriteToLog(&txnDeliRec);
        }
        catch (CBaseErr *e)
        {
            char szTmp[1024];
            wsprintf( szTmp, "Error in Delivery Txn
thread. %s", e->ErrorText() );
            WriteMessageToEventLog( szTmp );

            // log the error txn
            txnDeliRec.TxnStatus = e->ErrorType();
            if (txnDelilog != NULL)

txnDelilog->WriteToLog(&txnDeliRec);

            delete e;
        }
        catch (...)
        {
            // unhandled exception; shouldn't happen; not
much we can do...

WriteMessageToEventLog(TEXT("Unhandled exception caught in
DeliveryWorkerThread. "));
        }
    }

ErrorExit:
    delete pTxn;
    _endthread();
}

/* FUNCTION: PostDeliveryInfo
*
* PURPOSE: This function enters the delivery txn into the deferred
delivery buffer.
*
* RETURNS: BOOL FALSE delivery information
posted successfully
TRUE
error cannot post delivery info
*/

BOOL PostDeliveryInfo(short w_id, short o_carrier_id)
{
    BOOL bError;

```

```

EnterCriticalSection(&DelBuffCriticalSection);
if (dwDelBuffFreeCount > 0)
{
    bError = FALSE;
    (pDelBuff+dwDelBuffFreeIndex)->w_id
= w_id;
    (pDelBuff+dwDelBuffFreeIndex)->o_carrier_id
=
o_carrier_id;
    GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)->queue);

    dwDelBuffFreeCount--;
    dwDelBuffFreeIndex++;
    if (dwDelBuffFreeIndex == dwDelBuffSize)
        dwDelBuffFreeIndex = 0;
    //
wrap-around if at end of buffer
}
else
    // No free buffers. Return an error, which indicates that
the delivery buffer is full.
    // Most likely, the number of delivery worker threads
needs to be increased to keep up
    // with the txn rate.
    bError = TRUE;
    LeaveCriticalSection(&DelBuffCriticalSection);

    if (!bError)
        // increment worker semaphore to wake up a worker
thread
        ReleaseSemaphore( hWorkerSemaphore, 1, NULL );

    return bError;
}

/* FUNCTION: ProcessQueryString
*
* PURPOSE: This function extracts the relevent information out of the
http command passed in from
the browser.
*
* COMMENTS: If this is the initial connection i.e. client is at welcome
screen then
there will not be a terminal id or
current form id. If this is the case
then the pTermid and pFormid
return values are undefined.
*/

void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int
*pCmd, int *pFormId, int *pTermId, int *pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e. CMD=command
    static char *szCmds[] =
    {
        "Process", "..NewOrder..", "..Payment..", "..Delivery..",
        "..Order-Status..", "..Stock-Level..",
        "..Exit..", "Submit", "Menu", "Clear", "Stats", ""
    };

    *pCmd = 0; // default is the login screen
    *pTermId = 0;

    // if no params (i.e., empty query string), then return login screen
    if (strlen(pECB->lpszQueryString) == 0)

```

```

return;

// parse FORMID, TERMID, and SYNCID
*pFormId = GetIntKeyValue(&ptr, "FORMID", NO_ERR,
NO_ERR);
*pTermId = GetIntKeyValue(&ptr, "TERMID", NO_ERR,
NO_ERR);
*pSyncId = GetIntKeyValue(&ptr, "SYNCID", NO_ERR,
NO_ERR);

// parse CMD
GetKeyValue(&ptr, "CMD", szBuffer, sizeof(szBuffer),
ERR_COMMAND_UNDEFINED);

// see which command it matches
for(i=0; ; i++)
{
    if (szCmds[i][0] == 0)
        // no more; no match; return error
        throw new CWEBCLNT_ERR(
ERR_COMMAND_UNDEFINED);
    if ( !strcmp(szCmds[i], szBuffer) )
    {
        *pCmd = i+1;
        break;
    }
}

/* FUNCTION: void WelcomeForm
 *
 */

void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this is first form client sees.
    strcpy( szBuffer, "<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><<BODY>"

"<B><BIG>Microsoft TPC-C Web Client (ver 4.20)</BIG></B> <BR> <BR>"
"font
face=\"Courier New\"><PRE>"
"__DATE__", "__TIME__" <BR>"
"Source:
"__FILE__" ("__TIMESTAMP__") <BR>"
"</PRE></font>"
"FORM
"INPUT
TYPE="hidden" NAME="STATUSID" VALUE="0">"
"INPUT
TYPE="hidden" NAME="ERROR" VALUE="0">"
"INPUT
TYPE="hidden" NAME="FORMID" VALUE="1">"
"INPUT
TYPE="hidden" NAME="TERMID" VALUE="0">"
"INPUT
TYPE="hidden" NAME="SYNCID" VALUE="0">"
"INPUT
TYPE="hidden" NAME="VERSION" VALUE=""
WEBCLIENT_VERSION ">"
);

```

```

sprintf( szTmp, "Configuration Settings: <BR><font
face=\"Courier New\" color=\"blue\"><PRE>"
"Txn Monitor =
<B>%s</B><BR>"
"Database protocol
= <B>%s</B><BR>"
"Max Connections
= <B>%d</B><BR>"
"# of Delivery Threads
= <B>%d</B><BR>"
"Max Pending
Deliveries = <B>%d</B><BR>"
, szTxnMonNames[Reg.eTxnMon],
szDBNames[Reg.eDB_Protocol],
Reg.dwMaxConnections,
dwNumDeliveryThreads, dwDelBuffSize );
strcat( szBuffer, szTmp);

if (Reg.eTxnMon == COM)
{
    sprintf( szTmp, "COM Single Pool =
<B>%s</B><BR>",
Reg.bCOM_SinglePool ? "YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>");

if (Reg.eTxnMon == None)
    // connection options may be specified when not using a
txn monitor
    sprintf( szTmp, "Please enter your database options
for this connection:<BR>"
"font
face=\"Courier New\" color=\"blue\"><PRE>"
"DB Server
= <INPUT NAME=\"db_server\" SIZE=20 VALUE=\"%s\"><BR>"
"DB User
ID = <INPUT NAME=\"db_user\" SIZE=20 VALUE=\"%s\"><BR>"
"DB
Password = <INPUT NAME=\"db_passwd\" SIZE=20
VALUE=\"%s\"><BR>"
"DB Name
= <INPUT NAME=\"db_name\" SIZE=20 VALUE=\"%s\"><BR>"
"</PRE></font>"
, Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
else
    // if using a txn monitor, connection options are
determined from registry; can't
// set per user. show options fyi
    sprintf( szTmp, "Database options which will be
used by the transaction monitor:<BR>"
"font
face=\"Courier New\" color=\"blue\"><PRE>"
"DB Server
= <B>%s</B><BR>"
"DB User
ID = <B>%s</B><BR>"
"DB
Password = <B>%s</B><BR>"
"DB Name
= <B>%s</B><BR>"
"</PRE></font>"
, Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
strcat( szBuffer, szTmp);

```

```

        sprintf( szTmp, "Please enter your Warehouse and District for
this session:<BR>"
                "<font face='Courier
New' color='blue'><PRE>" );
        strcat( szBuffer, szTmp);
        strcat( szBuffer, "Warehouse ID = <INPUT NAME='w_id'
SIZE=4><BR>"
                "District ID
= <INPUT NAME='d_id' SIZE=2><BR>"
                "</PRE></font><HR>"
                "<INPUT
TYPE='submit' NAME='CMD' VALUE='Submit'>"
                "</FORM></BODY></HTML>");
}
/* FUNCTION: SubmitCmd
*
* PURPOSE: This function allocated a new terminal id in the Term
structure array.
*
*/
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int iNewTerm;
    char *ptr = pECB->lpszQueryString;

    char szVersion[32] = { 0 };
    char szServer[32] = { 0 };
    char szUser[32] = "sa";
    char szPassword[32] = { 0 };
    char szDatabase[32] = "tpcc";

    // validate version field; the version field ensures that the RTE is
synchronized with the web client
    GetKeyValue(&ptr, "VERSION", szVersion, sizeof(szVersion),
ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCLNT_ERR(
ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server", szServer,
sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user", szUser, sizeof(szUser),
NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd", szPassword,
sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name", szDatabase,
sizeof(szDatabase), NO_ERR);
    }

    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCLNT_ERR( ERR_W_ID_INVALID
);

    // parse district ID

```

```

        int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
        if ( d_id < 1 || d_id > 10 )
            throw new CWEBCLNT_ERR( ERR_D_ID_INVALID
);

        iNewTerm = TermAdd();

        Term.pClientData[iNewTerm].w_id = w_id;
        Term.pClientData[iNewTerm].d_id = d_id;

        try
        {
            if (Reg.eTxnMon == TUXEDO)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_TUXEDO_new();
            else if (Reg.eTxnMon == ENCINA)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_ENCINA_new();
            else if (Reg.eTxnMon == COM)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
            else if (Reg.eDB_Protocol == ODBC)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword, szMyComputerName,
szDatabase );
            else if (Reg.eDB_Protocol == DBLIB)
                Term.pClientData[iNewTerm].pTxn =
pCTPCC_DBLIB_new( szServer, szUser, szPassword, szMyComputerName,
szDatabase );
        }
        catch (...)
        {
            TermDelete(iNewTerm);
            throw; // pass exception upward
        }

        MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
}
/* FUNCTION: StatsCmd
*
* PURPOSE: This function returns to the browser the total number of
active terminal ids.
*
* This routine is for development/debugging
purposes.
*
*/
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int i;
    int iTot;

    EnterCriticalSection(&TermCriticalSection);

    iTot = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            iTot++;
    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,

```

```

" <HTML><HEAD><TITLE>TPC-C Web
Client Stats</TITLE></HEAD>"
" <BODY><B><BIG> Total Active
Connections: %d </BIG></B><BR></BODY></HTML>"
, iTot);
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        {
            ERR_COMMAND_UNDEFINED,
            "Command undefined."
        },
        {
            ERR_D_ID_INVALID,
            "Invalid District ID Must be 1 to 10."
        },
        {
            ERR_DELIVERY_CARRIER_ID_RANGE,
            "Delivery Carrier ID out of range must be 1 - 10."
        },
        {
            ERR_DELIVERY_CARRIER_INVALID,
            "Delivery Carrier ID invalid must be numeric 1 - 10."
        },
        {
            ERR_DELIVERY_MISSING_OCD_KEY,
            "Delivery missing Carrier ID key \"OCD*\"."
        },
        {
            ERR_DELIVERY_THREAD_FAILED,
            "Could not start delivery worker thread."
        },
        {
            ERR_GETPROCADDR_FAILED,
            "Could not map proc in DLL. GetProcAddr
error. DLL="
        },
        {
            ERR_HTML_ILL_FORMED,
            "Required key field is missing from HTML string."
        },
        {
            ERR_INVALID_SYNC_CONNECTION,
            "Invalid Terminal Sync ID."
        },
        {
            ERR_INVALID_TERMID,
            "Invalid Terminal ID."
        },
        {
            ERR_LOADDLL_FAILED,
            "Load of DLL failed. DLL="
        },
        {
            ERR_MAX_CONNECTIONS_EXCEEDED,
            "No connections available. Max Connections is probably
too low."
        },
        {
            ERR_MISSING_REGISTRY_ENTRIES,
            "Required registry entries are missing. Rerun INSTALL to correct."
        },
        {
            ERR_NEWORDER_CUSTOMER_INVALID,
            "New Order customer id invalid data type, range = 1 to 3000."
        },
        {
            ERR_NEWORDER_CUSTOMER_KEY,
            "New Order missing Customer key \"CID*\"."
        },
        {
            ERR_NEWORDER_DISTRICT_INVALID,
            "New Order District ID Invalid range 1 - 10."
        },
        {
            ERR_NEWORDER_FORM_MISSING_DID,
            "New Order missing District key \"DID*\"."
        }
    }
}

```

```

{
    ERR_NEWORDER_ITEMID_INVALID,
    "New Order Item Id is wrong data type, must be numeric."
},
{
    ERR_NEWORDER_ITEMID_RANGE,
    "New Order Item Id is out of range. Range = 1 to
999999."
},
{
    ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
    "New Order
Item_Id field entered without a corresponding Supp_W."
},
{
    ERR_NEWORDER_MISSING_IID_KEY,
    "New Order missing Item Id key \"IID*\"."
},
{
    ERR_NEWORDER_MISSING_QTY_KEY,
    "New Order Missing Qty key \"Qty##*\"."
},
{
    ERR_NEWORDER_MISSING_SUPPW_KEY,
    "New Order missing Supp_W key \"SP##*\"."
},
{
    ERR_NEWORDER_NOITEMS_ENTERED,
    "New Order No order lines entered."
},
{
    ERR_NEWORDER_QTY_INVALID,
    "New Order Qty invalid must be numeric range 1 - 99."
},
{
    ERR_NEWORDER_QTY_RANGE,
    "New Order Qty is out of range. Range = 1 to
99."
},
{
    ERR_NEWORDER_QTY_WITHOUT_SUPPW,
    "New Order Qty field entered without a corresponding Supp_W."
},
{
    ERR_NEWORDER_SUPPW_INVALID,
    "New Order Supp_W invalid data type must be numeric."
},
{
    ERR_NO_SERVER_SPECIFIED,
    "No Server name specified."
},
{
    ERR_ORDERSTATUS_CID_AND_CLT,
    "Order Status Only Customer ID or Last Name may be entered, not
both."
},
{
    ERR_ORDERSTATUS_CID_INVALID,
    "Order Status Customer ID invalid, range must be numeric 1 -
3000."
},
{
    ERR_ORDERSTATUS_CLT_RANGE,
    "Order Status Customer last name longer than 16
characters."
},
{
    ERR_ORDERSTATUS_DID_INVALID,
    "Order Status District invalid, value must be numeric 1 - 10."
},
{
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    "Order
Status Either Customer ID or Last Name must be entered."
},
{
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    "Order
Status missing Customer key \"CID*\"."
},
{
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    "Order
Status missing Customer Last Name key \"CLT*\"."
},
{
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    "Order
Status missing District key \"DID*\"."
}
}

```

```

        {
            ERR_PAYMENT_CDI_INVALID,
            "Payment Customer district invalid must be numeric."
        },
        {
            ERR_PAYMENT_CID_AND_CLT,
            "Payment Only Customer ID or Last Name may be
entered, not both."
        },
        {
            ERR_PAYMENT_CUSTOMER_INVALID,
            "Payment Customer data type invalid, must be numeric."
        },
        {
            ERR_PAYMENT_CWI_INVALID,
            "Payment Customer Warehouse invalid, must be
numeric."
        },
        {
            ERR_PAYMENT_DISTRICT_INVALID,
            "Payment District ID is invalid, must be 1 - 10."
        },
        {
            ERR_PAYMENT_HAM_INVALID,
            "Payment Amount invalid data type must be numeric."
        },
        {
            ERR_PAYMENT_HAM_RANGE,
            "Payment Amount out of range, 0 - 9999.99."
        },
        {
            ERR_PAYMENT_LAST_NAME_TO_LONG,
            "Payment Customer last name longer than 16 characters."
        },
        {
            ERR_PAYMENT_MISSING_CDI_KEY,
            "Payment missing Customer district key \"CDI*\"."
        },
        {
            ERR_PAYMENT_MISSING_CID_CLT,
            "Payment Either Customer ID or Last Name must be entered."
        },
        {
            ERR_PAYMENT_MISSING_CID_KEY,
            "Payment missing Customer Key \"CID*\"."
        },
        {
            ERR_PAYMENT_MISSING_CLT_KEY,
            "Payment missing Customer Last Name key \"CLT*\"."
        },
        {
            ERR_PAYMENT_MISSING_CWI_KEY,
            "Payment missing Customer Warehouse key \"CWI*\"."
        },
        {
            ERR_PAYMENT_MISSING_DID_KEY,
            "Payment missing District Key \"DID*\"."
        },
        {
            ERR_PAYMENT_MISSING_HAM_KEY,
            "Payment missing Amount key \"HAM*\"."
        },
        {
            ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
            "Stock Level; missing Threshold key \"TT*\"."
        },
        {
            ERR_STOCKLEVEL_THRESHOLD_INVALID,
            "Stock Level; Threshold value must be in the range = 1 - 99."
        },
        {
            ERR_STOCKLEVEL_THRESHOLD_RANGE,
            "Stock Level Threshold out of range, range must be 1 - 99."
        },
        {
            ERR_VERSION_MISMATCH,
            "Invalid version field. RTE and Web Client are probably
out of sync."
        },
        {
            ERR_W_ID_INVALID,
            "Invalid Warehouse ID."
        },
        {
            0,
            ""
        }
    }

```

```

    };
    char szTmp[256];
    int i = 0;
    while (TRUE)
    {
        if (errorMsgs[i].szMsg[0] == 0)
        {
            strcpy( szTmp, "Unknown error number." );
            break;
        }
        if (m_Error == errorMsgs[i].iError)
        {
            strcpy( szTmp, errorMsgs[i].szMsg );
            break;
        }
        i++;
    }
    if (m_szTextDetail)
        strcat( szTmp, m_szTextDetail );
    if (m_SystemErr)
        wsprintf( szTmp+strlen(szTmp), " Error=%d",
m_SystemErr );

    m_szErrorText = new char[strlen(szTmp)+1];
    strcpy( m_szErrorText, szTmp );
    return m_szErrorText;
}

/* FUNCTION: GetKeyValue
*
* PURPOSE:      This function parses a http formatted string for specific
key values.
*
* ARGUMENTS:   char          *pQueryString
http string from client browser
*
* pKey         char          key value to look for
*
* pValue       char          character array into which to place key's value
*
* iMax         int          maximum length of key value array.
*
* err          WEBERROR    error value to throw
*
* RETURNS:     nothing.
*
* ERROR:       if (the pKey value is not found) then
if (err == 0)
return
(empty string)
else
throw
CWEBCLNT_ERR(err)
*
* COMMENTS:    http keys are formatted either KEY=value& or
KEY=value\0. This DLL formats
TPC-C input fields in such a
manner that the keys can be extracted in the
above manner.
*/

void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax,
WEBERROR err)
{
    char *ptr;

```



```

if ( !(ptr=strstr(*pQueryString, pKey)) )
    goto ErrorExit;
ptr += strlen(pKey);
if ( *ptr != '=' )
    goto ErrorExit;
ptr++;

iMax--; // one position is for terminating null
while( *ptr && *ptr != '&' && iMax )
{
    *pValue++ = *ptr++;
    iMax--;
}
*pValue = 0; // terminating null

*pQueryString = ptr;
return;

ErrorExit:
if (err != NO_ERR)
    throw new CWEBCLNT_ERR( err );
*pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
*
* PURPOSE:      This function parses a http formatted string for a specific
key value.
*
* ARGUMENTS:   char                *pQueryString
http string from client browser
*
* pKey          char
key value to look for
*
* NoKeyErr      WEBERROR
error value to throw if key not found
*
* NotIntErr     WEBERROR
error value to throw if value not numeric
*
* RETURNS:      integer
*
* ERROR:        if (the pKey value is not found) then
*               if (NoKeyErr !=
NO_ERR)
*               throw
CWEBCLNT_ERR(err)
*               else
*               return 0
*               else if (non-numeric char found)
then
*               if (NotIntErr !=
NO_ERR) then
*               throw
CWEBCLNT_ERR(err)
*               else
*               return 0
*
* COMMENTS:    http keys are formatted either KEY=value& or
KEY=value0. This DLL formats
*               TPC-C input fields in such a
manner that the keys can be extracted in the
*               above manner.
*/

int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR
NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;

```

```

char *ptr;

if ( !(ptr=strstr(*pQueryString, pKey)) )
    goto ErrorNoKey;
ptr += strlen(pKey);
if ( *ptr != '=' )
    goto ErrorNoKey;
ptr++;

ptr0 = ptr; // remember starting point
// scan string until a terminator (null or &) or a non-digit
while( *ptr && *ptr != '&' && isdigit(*ptr) )
    ptr++;

// make sure we stopped scanning for the right reason
if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
{
    if (NotIntErr != NO_ERR)
        throw new CWEBCLNT_ERR( NoKeyErr );
    return 0;
}

*pQueryString = ptr;
return atoi(ptr0);

ErrorNoKey:
if (NoKeyErr != NO_ERR)
    throw new CWEBCLNT_ERR( NoKeyErr );
return 0;
}

/* FUNCTION: TermInit
*
* PURPOSE:      This function initializes the client terminal structure; it is
called when the TPC.C.DLL
*               is first loaded by the inet service.
*
*/

void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries = Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries * sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNT_ERR(
ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData, Term.iNumEntries *
sizeof(CLIENTDATA) );

    Term.iFreeList = Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets set to -1, which marks it
as "in use".
    // This is intentional, as the zero entry is used as an anchor and
never
    // allocated as an actual terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree = i-1;

```

```

        LeaveCriticalSection(&TermCriticalSection);
    }

/* FUNCTION: TermDeleteAll
 *
 * PURPOSE:      This function frees allocated resources associated with
the terminal structure.
 *
 * ARGUMENTS:   none
 *
 * RETURNS:     None
 *
 * COMMENTS:    This function is called only when the inet service unloads
the TPCC.DLL
 *
 */

void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            delete Term.pClientData[i].pTxn;
    }

    Term.iFreeList          = 0;
    Term.iNumEntries       = 0;
    if ( Term.pClientData )
        free(Term.pClientData);
    Term.pClientData       = NULL;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermAdd
 *
 * PURPOSE:      This function assigns a terminal id which is used to
identify a client browser.
 *
 * RETURNS:     int          assigned terminal id
 *
 */

int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;
        Term.pClientData[iNewTerm].iNextFree = -1; //
indicates this position is in use
    }
    else
    {
        // no open slots, so find the slot that hasn't been used in
the longest time and reuse it
        for(iNewTerm=1, i=1, iTickCount=0x7FFFFFFF;
i<Reg.dwMaxConnections; i++)

```

```

        {
            if (iTickCount >
Term.pClientData[i].iTickCount)
            {
                iTickCount =
Term.pClientData[i].iTickCount;
                iNewTerm = i;
            }
            // if oldest term is less than one minute old, it probably
means that more connections
            // are being attempted than were specified as "Max
Connections" at install. In this case,
            // do not bump existing connection; instead, return error
to requestor.
            if ((GetTickCount() - iTickCount) < 60000)
            {
                LeaveCriticalSection(&TermCriticalSection);
                throw new CWEBCLNT_ERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
            }

            Term.pClientData[iNewTerm].iTickCount = GetTickCount();
            Term.pClientData[iNewTerm].iSyncId = Term.iMasterSyncId++;
            Term.pClientData[iNewTerm].pTxn = NULL;

            LeaveCriticalSection(&TermCriticalSection);
            return iNewTerm;
        }
    }

/* FUNCTION: TermDelete
 *
 * PURPOSE:      This function makes a terminal entry in the Term array
available for reuse.
 *
 * ARGUMENTS:   int
id          Terminal id of client exiting
 *
 */

void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;

        // put onto free list
        EnterCriticalSection(&TermCriticalSection);

        Term.pClientData[id].iNextFree = Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
 */

void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int
iErrorNum, int iTermId, int iSyncId, char *szErrorText, char *szBuffer )
{
    wsprintf(szBuffer,
"<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
"<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"

```

```

VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="STATUSID\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="ERROR\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="FORMID\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="TERMID\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="SYNCID\
VALUE="%d\ ">
" <BOLD>An Error Occurred</BOLD><BR><BR>
"%s"
"<BR><BR><HR>"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..NewOrder..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Payment..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Delivery..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Order-Status..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Stock-Level..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Exit..\ ">
" </FORM></BODY></HTML>"
, iType, iErrorNum, MAIN_MENU_FORM, iTermId,
iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
*/

void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm)
{
    wsprintf(szForm,
" <HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
"Select Desired Transaction.<BR><HR>"
" <FORM ACTION="tpcc.dll" METHOD="GET">"
" <INPUT TYPE="hidden" NAME="STATUSID\
VALUE="0\ ">
" <INPUT TYPE="hidden" NAME="ERROR\
VALUE="0\ ">
" <INPUT TYPE="hidden" NAME="FORMID\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="TERMID\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="SYNCID\
VALUE="%d\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..NewOrder..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Payment..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Delivery..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Order-Status..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Stock-Level..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Exit..\ ">
" </FORM></BODY></HTML>"
, MAIN_MENU_FORM, iTermId, iSyncId);
}

/* FUNCTION: MakeStockLevelForm
*

```

```

* PURPOSE: This function constructs the Stock Level HTML page.
*
* COMMENTS: The internal client buffer is created when the terminal id
is assigned and should not
be freed except when the client
terminal id is no longer needed.
*/

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm)
{
    int c;

    c = wsprintf(szForm,
" <HTML><HEAD><TITLE>TPC-C Stock
Level</TITLE></HEAD><FORM ACTION="tpcc.dll"
METHOD="GET">"
" <INPUT TYPE="hidden" NAME="STATUSID\
VALUE="0\ ">
" <INPUT TYPE="hidden" NAME="ERROR\
VALUE="0\ ">
" <INPUT TYPE="hidden" NAME="FORMID\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="TERMID\
VALUE="%d\ ">
" <INPUT TYPE="hidden" NAME="SYNCID\
VALUE="%d\ ">
" <PRE><font face="Courier">
Stock-Level<BR>"
"Warehouse: %4.4d District: %2.2d<BR> <BR>",
STOCK_LEVEL_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id,
Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
"Stock Level Threshold: <INPUT
NAME="TT*" SIZE=2><BR> <BR>"
"low stock: </font><BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR>"
" <BR> <BR> <BR> <BR> <BR> <BR>
<BR></PRE><HR>"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="Process\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="Menu\ ">
" </FORM></HTML>" );
    }
    else
    {
        wsprintf(szForm+c,
"Stock Level Threshold: %2.2d<BR> <BR>"
"low stock: %3.3d</font> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR>"
" <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR></PRE><HR>"
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..NewOrder..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Payment..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Delivery..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Order-Status..\ ">
" <INPUT TYPE="submit" NAME="CMD\
VALUE="..Stock-Level..\ ">

```



```

pNewOrderData->o_entry_d.minute,
pNewOrderData->o_entry_d.second);
    }

    c += sprintf(szForm+c, "<BR>Customer: %4.4d
Name: %-16s Credit: %2s ",
                pNewOrderData->c_id,
pNewOrderData->c_last, pNewOrderData->c_credit);

    if ( bValid )
    {
        c += sprintf(szForm+c,
                    "%5.2f <BR>"
                    "Order
Number: %8.8d Number of Lines: %2.2d W_tax: %5.2f D_tax: %5.2f
<BR> <BR>"
                    " Supp_W
Item_Id Item Name Qty Stock B/G Price Amount<BR>",
                    100.0*pNewOrderData->c_discount,
                    pNewOrderData->o_id,
                    pNewOrderData->o_ol_cnt,
                    100.0 * pNewOrderData->w_tax,
                    100.0 * pNewOrderData->d_tax);

        for(i=0; i<pNewOrderData->o_ol_cnt; i++)
        {
            c += sprintf(szForm+c, " %4.4d
%6.6d %-24s %2.2d %3.3d %1.1s $%6.2f $%7.2f <BR>",
                pNewOrderData->OL[i].ol_supply_w_id,
                pNewOrderData->OL[i].ol_i_id,
                pNewOrderData->OL[i].ol_i_name,
                pNewOrderData->OL[i].ol_quantity,
                pNewOrderData->OL[i].ol_stock,
                pNewOrderData->OL[i].ol_brand_generic,
                pNewOrderData->OL[i].ol_i_price,
                pNewOrderData->OL[i].ol_amount );
        }
        else
        {
            c += sprintf(szForm+c,
                        "%Disc:<BR>"
                        "Order Number: %8.8d Number
of Lines: W_tax: D_tax:<BR> <BR>"
                        " Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>"
                        , pNewOrderData->o_id);

            i = 0;
        }

        strcpy( szForm+c, szBR, (15-i)*5 );
        c += (15-i)*5;

        if ( bValid )

```

```

Transaction committed.
        c += sprintf(szForm+c, "Execution Status:
Total: %8.2f ",
                    pNewOrderData->total_amount);
    else
        c += sprintf(szForm+c, "Execution Status:
Total:");

        strcpy(szForm+c,
                "<BR></font></PRE><HR>"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..NewOrder..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Payment..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Delivery..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Order-Status..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Stock-Level..\">"
                "<INPUT TYPE='submit' NAME='CMD'"
                VALUE='\"..Exit..\">"
                "</FORM></HTML>"
                );
    }
}

/* FUNCTION: MakePaymentForm
*
* COMMENTS: The internal client buffer is created when the terminal id
is assigned and should not
* be freed except when the client
terminal id is no longer needed.
*/

void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData,
                    BOOL blnput, char *szForm)
{
    int c;

    c = sprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"
                "<FORM ACTION='\"tpcc.dll\" METHOD='\"GET\"'"
                "<INPUT TYPE='hidden' NAME='\"STATUSID\"'"
                VALUE='\"0\">"
                "<INPUT TYPE='hidden' NAME='\"ERROR\"'"
                VALUE='\"0\">"
                "<INPUT TYPE='hidden' NAME='\"FORMID\"'"
                VALUE='\"%d\">"
                "<INPUT TYPE='hidden' NAME='\"TERMINID\"'"
                VALUE='\"%d\">"
                "<INPUT TYPE='hidden' NAME='\"SYNCID\"'"
                VALUE='\"%d\">"
                "<PRE><font face='\"Courier\"'"
                Payment<BR>"
                "Date: "
                , PAYMENT_FORM, iTermId,
                Term.pClientData[iTermId].iSyncId);

    if ( !blnput )
    {
        c += sprintf(szForm+c, "%2.2d-%2.2d-%4.4d
%2.2d:%2.2d:%2.2d",
                    pPaymentData->h_date.day,
                    pPaymentData->h_date.month,
                    pPaymentData->h_date.year,
                    pPaymentData->h_date.hour,
                    pPaymentData->h_date.minute,

```

```

        pPaymentData->h_date.second);
    }
    if ( bInput )
    {
        c += sprintf(szForm+c,
            "<BR> <BR>Warehouse: %4.4d"
            "          District: <INPUT
NAME=\"DID*\" SIZE=1><BR> <BR> <BR> <BR> <BR>"
            "Customer: <INPUT NAME=\"CID*\"
SIZE=4>"
            "Cust-Warehouse: <INPUT NAME=\"CWI*\"
SIZE=4> "
            "Cust-District: <INPUT NAME=\"CDI*\"
SIZE=1><BR>"
            "Name:          <INPUT
NAME=\"CLT*\" SIZE=16> Since:<BR>"
            "          Credit:<BR>"
            "          Disc:<BR>"
            "          Phone:<BR>"
            "<BR>"
            "Amount Paid:    $<INPUT
NAME=\"HAM*\" SIZE=7> New Cust-Balance:<BR>"
            "Credit Limit:<BR> <BR>Cust-Data: <BR>
<BR> <BR> <BR> <BR></font></PRE><HR>"
            " <INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Process\"><INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Menu\">"
            "</BODY></FORM></HTML>"
            , Term.pClientData[iTermId].w_id);
    }
    else
    {
        c += sprintf(szForm+c,
            "<BR> <BR>Warehouse: %4.4d
District: %2.2d<BR>"
            "%-20s          %-20s<BR>"
            "%-20s          %-20s<BR>"
            "%-20s %-2s %-5.5s-%4.4s    %-20s %-2s
%5.5s-%4.4s<BR> <BR>"
            "Customer: %4.4d Cust-Warehouse: %4.4d
Cust-District: %2.2d<BR>"
            "Name:  %-16s %-2s %-16s  Since:
%-2.2d-%2.2d-%4.4d<BR>"
            "          %-20s          Credit: %-2s<BR>"
            , Term.pClientData[iTermId].w_id,
            pPaymentData->d_id,
            pPaymentData->w_street_1,
            pPaymentData->w_street_2,
            pPaymentData->d_street_2,
            pPaymentData->w_city,
            pPaymentData->w_state, pPaymentData->w_zip, pPaymentData->w_zip+5,
            pPaymentData->d_city,
            pPaymentData->d_state, pPaymentData->d_zip, pPaymentData->d_zip+5,
            pPaymentData->c_id,
            pPaymentData->c_d_id,
            pPaymentData->c_first,
            pPaymentData->c_middle, pPaymentData->c_last,
            pPaymentData->c_since.day,
            pPaymentData->c_since.month, pPaymentData->c_since.year,
            pPaymentData->c_street_1,
            pPaymentData->c_credit
        );
        c += sprintf(szForm+c,

```

```

            "          %-20s          %%Disc:
%5.2f<BR>",
            pPaymentData->c_street_2,
            100.0*pPaymentData->c_discount);
        c += sprintf(szForm+c,
            "          %-20s %-2s %-5.5s-%4.4s    Phone:
%6.6s-%3.3s-%3.3s-%4.4s<BR> <BR>",
            pPaymentData->c_city,
            pPaymentData->c_state, pPaymentData->c_zip, pPaymentData->c_zip+5,
            pPaymentData->c_phone,
            pPaymentData->c_phone+6, pPaymentData->c_phone+9,
            pPaymentData->c_phone+12 );
        c += sprintf(szForm+c,
            "Amount Paid:    $%7.2f  New
Cust-Balance: $%14.2f<BR>"
            "Credit Limit:  $%13.2f<BR> <BR>"
            , pPaymentData->h_amount,
            pPaymentData->c_balance,
            pPaymentData->c_credit_lim
        );
        if ( pPaymentData->c_credit[0] == 'B' &&
            pPaymentData->c_credit[1] == 'C' )
            c += sprintf(szForm+c,
                "Cust-Data:
%-50.50s<BR>    %-50.50s<BR>    %-50.50s<BR>
%-50.50s<BR>",
                pPaymentData->c_data,
                pPaymentData->c_data+50, pPaymentData->c_data+100,
                pPaymentData->c_data+150 );
            else
                strcpy(szForm+c, "Cust-Data: <BR> <BR>
<BR> <BR>");
        strcat(szForm,
            " <BR></font></PRE><HR>"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Payment..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Delivery..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-Status..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
            " <INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">"
            "</BODY></FORM></HTML>");
    }
}
/* FUNCTION: MakeOrderStatusForm
*
* COMMENTS:   The internal client buffer is created when the terminal id
is assigned and should not
*             be freed except when the client
terminal id is no longer needed.
*/
void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA
*pOrderStatusData, BOOL bInput, char *szForm)
{
    int          i, c;

```



```

VALUE="%">"
Delivery<BR>"
    "Warehouse: %4.4d<BR> <BR>",
    (!bInput && (pDeliveryData->exec_status_code !=
eOK)) ? ERR_TYPE_DELIVERY_POST : 0,
    DELIVERY_FORM, iTermId,
Term.pClientData[iTermId].iSyncId, Term.pClientData[iTermId].w_id);

    if ( bInput )
    {
        strcpy( szForm+c,
                "Carrier Number: <INPUT NAME=\"OCD*"
SIZE=1><BR> <BR>"
                "Execution Status: <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR>"
                " <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> </font></PRE><HR>"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Process\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"Menu\">"
                "</BODY></FORM></HTML>");
    }
    else
    {
        sprintf( szForm+c,
                "Carrier Number: %2.2d<BR> <BR>"
                "Execution Status: %s <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR>"
                " <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> </font></PRE>"
                "<HR><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Payment..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Delivery..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Order-Status..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Stock-Level..\">"
                "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Exit..\">"
                "</BODY></FORM></HTML>"
                , pDeliveryData->o_carrier_id,
                (pDeliveryData->exec_status_code == eOK) ?
"Delivery has been queued." : "Delivery Post Failed "
                );
    }
}

/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE:      This function gets and validates the input data from the
new order form
*
*              filling in the required input variables. it then
calls the SQLNewOrder
*              transaction, constructs the output form and
writes it back to client
*              browser.
*/

void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{

```

```

PNEW_ORDER_DATA          pNewOrder;

    pNewOrder =
Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();

    ZeroMemory(pNewOrder, sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id = Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString, pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder =
Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE:      This function gets and validates the input data from the
payment form
*
*              filling in the required input variables. It then
calls the SQLPayment
*              transaction, constructs the output form and
writes it back to client
*              browser.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK      *pECB
passed in structure pointer from inetsrv.
*
*              int
*              iTermId      client browser terminal id
*/

void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{
    PPAYMENT_DATA pPayment;

    pPayment =
Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id = Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString, pPayment);

    Term.pClientData[iTermId].pTxn->Payment();

    pPayment =
Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE:      This function gets and validates the input data from the
Order Status
*
*              form filling in the required input variables. It
then calls the
*              SQLOrderStatus transaction, constructs the
output form and writes it
*              back to client browser.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK      *pECB
passed in structure pointer from inetsrv.
*
*              int
*              iTermId      client browser terminal id
*/

```



```

*/
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA    pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn->BuffAddr_OrderStatus();
ZeroMemory(pOrderStatus, sizeof(ORDER_STATUS_DATA));
pOrderStatus->w_id = Term.pClientData[iTermId].w_id;
GetOrderStatusData(pECB->lpszQueryString, pOrderStatus);

    Term.pClientData[iTermId].pTxn->OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn->BuffAddr_OrderStatus();
MakeOrderStatusForm(iTermId, pOrderStatus, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE:      This function gets and validates the input data from the
delivery form
*
*              filling in the required input variables. It then
calls the PostDeliveryInfo
*
*              Api, The client is then informed that the
transaction has been posted.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK    *pECB
passed in structure pointer from inetsrv.
*
*              int
iTermId    client browser terminal id
*/

void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{
    char    *ptr = pECB->lpszQueryString;

    PDELIVERY_DATA pDelivery;

    pDelivery =
Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
ZeroMemory(pDelivery, sizeof(DELIVERY_DATA));
pDelivery->w_id = Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id    = GetIntKeyValue(&ptr, "OCD*",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALID);
    if ( pDelivery->o_carrier_id > 10 || pDelivery->o_carrier_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery->w_id,
pDelivery->o_carrier_id )
            pDelivery->exec_status_code =
eDeliveryFailed;
        else
            pDelivery->exec_status_code = eOK;
    }
    else // delivery is done synchronously if no delivery threads
configured

```

```

Term.pClientData[iTermId].pTxn->Delivery();

    pDelivery =
Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
MakeDeliveryForm(iTermId, pDelivery, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
*
* PURPOSE:      This function gets and validates the input data from the
Stock Level
*
*              form filling in the required input variables. It
then calls the
*
*              SQLStockLevel transaction, constructs the
output form and writes it
*
*              back to client browser.
*
* ARGUMENTS:   EXTENSION_CONTROL_BLOCK    *pECB
passed in structure pointer from inetsrv.
*
*              int
iTermId    client browser terminal id
*/

void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer)
{
    char    *ptr = pECB->lpszQueryString;

    PSTOCK_LEVEL_DATA    pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn->BuffAddr_StockLevel();
ZeroMemory( pStockLevel, sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id = Term.pClientData[iTermId].w_id;
pStockLevel->d_id = Term.pClientData[iTermId].d_id;

    pStockLevel->threshold = GetIntKeyValue(&ptr, "TT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ( pStockLevel->threshold >= 100 || pStockLevel->threshold < 0 )
        throw new CWEBCLNT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn->StockLevel();

    pStockLevel =
Term.pClientData[iTermId].pTxn->BuffAddr_StockLevel();
MakeStockLevelForm(iTermId, pStockLevel, OUTPUT_FORM,
szBuffer);
}

/* FUNCTION: GetNewOrderData
*
* PURPOSE:      This function extracts and validates the new order form
data from an http command string.
*
* ARGUMENTS:   LPSTR                                lpszQueryString
client browser http command string
*
*              NEW_ORDER_DATA
*pNewOrderData    pointer to new order data structure
*
*/

void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA
*pNewOrderData)

```

```

{
    char    szTmp[26];
    int     i;
    short   items;
    int     ol_i_id, ol_quantity;
    char    *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6] =
        { "SP00*", "SP01*", "SP02*", "SP03*", "SP04*",
          "SP05*", "SP06*", "SP07*", "SP08*", "SP09*",
          "SP10*", "SP11*", "SP12*", "SP13*", "SP14*" };
    static char szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "IID00*", "IID01*", "IID02*", "IID03*", "IID04*",
          "IID05*", "IID06*", "IID07*", "IID08*", "IID09*",
          "IID10*", "IID11*", "IID12*", "IID13*", "IID14*" };
    static char szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "Qty00*", "Qty01*", "Qty02*", "Qty03*", "Qty04*",
          "Qty05*", "Qty06*", "Qty07*", "Qty08*", "Qty09*",
          "Qty10*", "Qty11*", "Qty12*", "Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr, "CID*",
ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS; i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp) )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData->OL[items].ol_supply_w_id
= (short)atoi(szTmp);

            ol_i_id = pNewOrderData->OL[items].ol_i_id
=
                GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999 || ol_i_id < 1 )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_ITEMID_RANGE );

            ol_quantity =
pNewOrderData->OL[items].ol_quantity =
                GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_QTY_INVALID);
            if ( ol_quantity > 99 || ol_quantity < 1 )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_QTY_RANGE );

            items++;
        }
        else
        {
            // nothing entered for supply warehouse, so
            item id and qty must also be blank
            GetKeyValue(&ptr, szIID[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_IID_KEY);
            if ( szTmp[0] )
                throw new CWEBCLNT_ERR(
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );

```

```

                GetKeyValue(&ptr, szQty[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_QTY_KEY);
                if ( szTmp[0] )
                    throw new CWEBCLNT_ERR(
ERR_NEWORDER_QTY_WITHOUT_SUPPW );
            }
        }
        if ( items == 0 )
            throw new CWEBCLNT_ERR(
ERR_NEWORDER_NOITEMS_ENTERED );

        pNewOrderData->o_ol_cnt = items;
    }

/* FUNCTION: GetPaymentData
*
* PURPOSE:      This function extracts and validates the payment form
data from an http command string.
*
* ARGUMENTS:   LPSTR                lpszQueryString
client browser http command string
                PAYMENT_DATA
* pPaymentData pointer to payment data structure
*/

void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA
*pPaymentData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;
    BOOL    bCustIdBlank;

    pPaymentData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        bCustIdBlank = TRUE;
        pPaymentData->c_id = 0;
    }
    else
    {
        // parse customer id and verify that last name was NOT
entered
        bCustIdBlank = FALSE;
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
        pPaymentData->c_id = atoi(szTmp);
    }

    pPaymentData->c_w_id = GetIntKeyValue(&ptr, "CWI*",
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
    pPaymentData->c_d_id = GetIntKeyValue(&ptr, "CDI*",
ERR_PAYMENT_MISSING_CDI_KEY, ERR_PAYMENT_CDI_INVALID);

    if ( bCustIdBlank )
    {
        // customer id is blank, so last name must be entered
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );

        _strupr( szTmp );

```

```

        if ( strlen(pPaymentData->c_last) > LAST_NAME_LEN
)
        throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );
        strcpy(pPaymentData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was NOT
entered
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_HAM_KEY);
    if (!IsDecimal(szTmp))
        throw new CWEBCLNT_ERR(
ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
        throw new CWEBCLNT_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
*
* PURPOSE:      This function extracts and validates the payment form
data from an http command string.
*
*/
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA
*pOrderStatusData)
{
    char    szTmp[26];
    char    *ptr = lpszQueryString;

    pOrderStatusData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(pOrderStatusData->c_last) >
LAST_NAME_LEN )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_CLT_RANGE );
        strcpy(pOrderStatusData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was NOT
entered

        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_CID_INVALID );

```

```

        pOrderStatusData->c_id = atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
*
* PURPOSE:      This function determines if a string is numeric. It fails if
any characters other
*
*               than numeric and null terminator are present.
*
* ARGUMENTS:   char                *ptr    pointer to
string to check.
*
* RETURNS:     BOOL    FALSE    if string is not all
numeric
*               TRUE    if
string contains only numeric characters i.e. '0' - '9'
*/

BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
*
* PURPOSE:      This function determines if a string is a non-negative
decimal value.
*
*               It fails if any characters other than a series of numbers followed by
*
*               a decimal point, another series of numbers,
and a null terminator are present.
*
* ARGUMENTS:   char                *ptr    pointer to
string to check.
*
* RETURNS:     BOOL    FALSE    if string is not a valid
non-negative decimal value
*               TRUE    if
string is OK
*/

BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if (dotptr == NULL)
        // no decimal point, so just check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace decimal with a terminator

    if ( *ptr != 0 )

```

```

        bValid = IsNumeric(ptr);
// string starts with decimal point
else if (*(dotptr+1) == 0)
    return FALSE; // nothing but a decimal point is bad
else
    bValid = TRUE;

if (*(dotptr+1) != 0)
    // check text after decimal point
    bValid &= IsNumeric(dotptr+1);

*dotptr = '!'; // replace decimal point
return bValid;
}

```

tpcc.def

LIBRARY TPCC.DLL

EXPORTS

```

GetExtensionVersion @1
HttpExtensionProc @2
TerminateExtension @3

```

tpcc.h

```

/* FILE: TPCC.H Microsoft TPC-C Kit Ver.
 * 4.20.000 Copyright Microsoft, 1999
 * All Rights Reserved
 * Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 * PURPOSE: Header file for ISAPI TPCC.DLL, defines
structures and functions used in the isapi tpcc.dll.
 */

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE
101
#define _APS_NEXT_COMMAND_VALUE
40001
#define _APS_NEXT_CONTROL_VALUE
1000
#define _APS_NEXT_SYMED_VALUE
101

#define TP_MAX_RETRIES
50

//note that the welcome form must be processed first as terminal ids assigned
here, once the
//terminal id is assigned then the forms can be processed in any order.
#define WELCOME_FORM
1 //beginning form no term id assigned, form id
#define MAIN_MENU_FORM
2 //term id assigned main menu form id
#define NEW_ORDER_FORM
3 //new order form id

```

```

#define PAYMENT_FORM
4 //payment form id
#define DELIVERY_FORM
5 //delivery form id
#define ORDER_STATUS_FORM
6 //order status id
#define STOCK_LEVEL_FORM
7 //stock level form id

//This macro is used to prevent the compiler error unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep distinct for each terminal or
client connection.
typedef struct _CLIENTDATA
{
    int iNextFree;
//index of next free element or -1 if this entry in use.
    int w_id;
//warehouse id assigned at welcome form
    int d_id;
//district id assigned at welcome form

    int iSyncId;
//synchronization id
    int iTickCount;
//time of last access;

    CTPCC_BASE *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational interface for terminal id support
typedef struct _TERM
{
    int iNumEntries;
//total allocated terminal array entries
    int iFreeList;
//next available terminal array element or -1 if none
    int iMasterSyncId;
//synchronization id
    CLIENTDATA *pClientData;
//pointer to allocated client data
} TERM;

typedef TERM *PTERM;
//pointer to terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADDLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,

```

```

ERR_NEWORDER_CUSTOMER_INVALID,
ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_DISTRICT_INVALID,
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_ITEMID_INVALID,
ERR_NEWORDER_ITEMID_RANGE,
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CDI_INVALID,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNT_ERR : public CBaseErr
{
public:
    CWEBCLNT_ERR(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CWEBCLNT_ERR(WEBERROR Err, char
*szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail, szTextDetail );
        m_SystemErr = dwSystemErr;
        m_szErrorText = NULL;
    };
};

};

~CWEBCLNT_ERR()
{
    if (m_szTextDetail != NULL)
        delete [] m_szTextDetail;
    if (m_szErrorText != NULL)
        delete [] m_szErrorText;
};

WEBERROR      m_Error;
char           *m_szTextDetail; //
char           *m_szErrorText;
DWORD         m_SystemErr;

int ErrorType() {return ERR_TYPE_WEBDLL;};
int ErrorNum() {return m_Error;};
char *ErrorText();

//These constants have already been defined in engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START          2
#define TXN_EVENT_STOP          4
#define TXN_EVENT_WARNING       6 //used to
record a warning into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call,
LPVOID lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int
*pCmd, int *pFormId, int *pTermId, int *pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int
iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int
iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int iError, int
iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax,
WEBERROR err);
int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR
NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int iType, int
iErrorNum, int iTermId, int iSyncId, char *szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData,
BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA
*pOrderStatusData, BOOL bInput, char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData,
BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);

```

```

void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int
iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA
*pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA
*pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA
*pOrderStatusData);
BOOL PostDeliveryInfo(short w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);

```

tpcc.rc

```

//Microsoft Developer Studio generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

//
// English (U.S.) resources
//
#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef _MAC
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN

```

```

        VALUE "Comments", "TPC-C HTML DLL Server (DBLIB)0"
        VALUE "CompanyName", "Microsoft0"
        VALUE "FileDescription", "TPC-C HTML DLL Server (DBLIB)0"
        VALUE "FileVersion", "0, 4, 0, 0\0"
        VALUE "InternalName", "tpcc0"
        VALUE "LegalCopyright", "Copyright © 1997\0"
        VALUE "OriginalFilename", "tpcc.dll\0"
        VALUE "ProductName", "Microsoft tpcc\0"
        VALUE "ProductVersion", "0, 4, 0, 0\0"
    END
END
BLOCK "VarFileInfo"
BEGIN
    VALUE "Translation", 0x409, 1200
END
END

#endif // !_MAC

#ifdef APSTUDIO_INVOKED
//
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"afxres.h\"\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

//
// Dialog
//
IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON "OK",IDOK,129,7,50,14
    PUSHBUTTON "Cancel",IDCANCEL,129,24,50,14
END

//
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED

```



```

        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    // call setcomplete to release each component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pStockLevel->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus->CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

```

```
CTPCC_COM::~CTPCC_COM()
```

```

{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

```

```
void CTPCC_COM::NewOrder()
```

```

{
    VARIANT vTxn_out;

    HRESULT hr = m_pNewOrder->NewOrder(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void
*)vTxn_out.parray->pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType,
m_pTxn->error );
}

```

```
void CTPCC_COM::Payment()
```

```

{
    VARIANT vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void
*)vTxn_out.parray->pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )

```

```

        throw new CCOMERR( m_pTxn->ErrorType,
m_pTxn->error );
    }

    void CTPCC_COM::StockLevel()
    {
        VARIANT vTxn_out;

        HRESULT hr = m_pStockLevel->StockLevel(m_vTxn,
&vTxn_out);
        if (FAILED(hr))
            throw new CCOMERR( hr );
        memcpy(m_pTxn, (void
*)vTxn_out.parray->pvData,vTxn_out.parray->rgsabound[0].cElements);
        SafeArrayDestroy(vTxn_out.parray);

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn->ErrorType,
m_pTxn->error );
    }

```

```
void CTPCC_COM::OrderStatus()
```

```

{
    VARIANT vTxn_out;

    HRESULT hr = m_pOrderStatus->OrderStatus(m_vTxn,
&vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void
*)vTxn_out.parray->pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn->ErrorType,
m_pTxn->error );
}

```

tpcc_com.h

```

/*      FILE:          TPCC_COM.H
*                               Microsoft TPC-C Kit Ver.
4.20.000
*                               Copyright Microsoft, 1999
*                               All Rights Reserved
*                               not yet audited
*
*      PURPOSE:       Header file for TPC-C COM+ class
implementation.
*
*      Change history:
*                               4.20.000 - first version
*/

#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CCOMERR : public CBaseErr

```



```

{
private:
    char m_szErrorText[64];

public:
    // use this interface for genuine COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to impersonate a non-COM error type
    CCOMERR( int iErrorType, int iError )
    {
        m_iErrorType = iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int m_hr;
    int m_iErrorType;
    int m_iError;

    // A CCOMERR class can impersonate another class,
    // which happens if the error
    // was not actually a COM Services error, but was simply
    // transmitted back via COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return ERR_TYPE_COM;
        else
            return m_iErrorType;
    }

    int ErrorNum() {return m_hr;}

    char *ErrorText()
    {
        if (m_hr == S_OK)
            sprintf( m_szErrorText, "Error:
Class %d, error # %d", m_iErrorType, m_iError );
        else
            sprintf( m_szErrorText, "Error:
COM HRESULT %x", m_hr );
        return m_szErrorText;
    }
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC* m_pNewOrder;
    ITPCC* m_pPayment;
    ITPCC* m_pStockLevel;
    ITPCC* m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA
            PAYMENT_DATA
            DELIVERY_DATA
            STOCK_LEVEL_DATA
            ORDER_STATUS_DATA
        } u;
    } *m_pTxn;

public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return &m_pTxn->u.NewOrder;
    };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return &m_pTxn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return &m_pTxn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
    { return &m_pTxn->u.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return &m_pTxn->u.OrderStatus; };

    void NewOrder ();
    void Payment ();
    void StockLevel ();
    void OrderStatus ();
    void Delivery () { throw new
    CCOMERR(E_NOTIMPL); } // not supported
    };

    inline void ReleaseInterface(IUnknown *pUnk)
    {
        if (pUnk)
        {
            pUnk->Release();
            pUnk = NULL;
        }
    }

    // wrapper routine for class constructor
    extern "C" __declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL);

    typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

tpcc_com_all.dsp

# Microsoft Developer Studio Project File - Name="tpcc_com_all" - Package
Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=tpcc_com_all - Win32 Debug
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE

```

```

!MESSAGE NMAKE /f "tpcc_com_all.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_all.mak" CFG="tpcc_com_all - Win32
Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc_com_all - Win32 Release" (based on "Win32 (x86)
Dynamic-Link Library")
!MESSAGE "tpcc_com_all - Win32 Debug" (based on "Win32 (x86)
Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "tpcc_com_all - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
" _WINDOWS" /YX /FD /c
# ADD CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
" _WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /1 0x409 /d "NDEBUG"
# ADD RSC /1 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbccp32.lib /nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 .\db_dblib_dll\bin\tpcc_dblib.lib
.\db_odbc_dll\bin\tpcc_odbc.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbccp32.lib /nologo /subsystem:windows /dll /machine:I386

!ELSEIF "$(CFG)" == "tpcc_com_all - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"

# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /ZI /Od /D "WIN32" /D
" _DEBUG" /D " _WINDOWS" /YX /FD /c
# ADD CPP /nologo /MTd /W3 /Gm /GX /ZI /Od /D "WIN32" /D " _DEBUG"
/D " _WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D " _DEBUG" /mktyplib203 /o "NUL" /win32
# ADD MTL /nologo /D " _DEBUG" /mktyplib203 /o "NUL" /win32
# ADD BASE RSC /1 0x409 /d " _DEBUG"
# ADD RSC /1 0x409 /d " _DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386
/pdbtype:sept

!ENDIF

# Begin Target

# Name "tpcc_com_all - Win32 Release"
# Name "tpcc_com_all - Win32 Debug"
# Begin Group "Source"

# PROP Default_Filter "*.cpp, *.c"
# Begin Source File

SOURCE=\src\tpcc_com_all.cpp
# SUBTRACT CPP /YX
# End Source File
# Begin Source File

SOURCE=\src\tpcc_com_all.def
# End Source File
# Begin Source File

SOURCE=\src\tpcc_com_all.idl

!IF "$(CFG)" == "tpcc_com_all - Win32 Release"

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=\src\tpcc_com_all.idl

BuildCmds= \
midl /Oicf /h "tpcc_com_all.h" /iid "tpcc_com_all_i.c"
"\src\tpcc_com_all.idl" /out ".\src"

"\src\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

"\src\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

"\src\tpcc_com_all_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_all - Win32 Debug"

```

```

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\src\tpcc_com_all.idl

BuildCmds= \
    midl /Oicf /h "tpcc_com_all.h" /iid "tpcc_com_all_i.c"
"\src\tpcc_com_all.idl" /out ".\src"

"\src\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

"\src\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

"\src\tpcc_com_all_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
# End Custom Build

!ENDIF

# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*"
# Begin Source File

SOURCE=.\src\Methods.h
# End Source File
# Begin Source File

SOURCE=.\src\resource.h
# End Source File
# End Group
# Begin Source File

SOURCE=.\src\tpcc_com_all.rc
# End Source File
# End Target
# End Project

```

tpcc_com_ps.def

```

LIBRARY "tpcc_com_ps"

DESCRIPTION 'Proxy/Stub DLL'

EXPORTS
    DllGetClassObject @1 PRIVATE
    DllCanUnloadNow @2 PRIVATE
    GetProxyDllInfo @3 PRIVATE
    DllRegisterServer @4 PRIVATE
    DllUnregisterServer @5 PRIVATE

```

tpcc_com_ps.h

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the definitions for the interfaces
*/

```

```

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of <rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef tpcc_com_ps_h_
#define tpcc_com_ps_h_

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef _cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR *);

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

```

```

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)

MIDL_INTERFACE("FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B")
ITPCC : public IUnknown
{
public:
virtual HRESULT __stdcall NewOrder(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall Payment(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall Delivery(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall StockLevel(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall OrderStatus(
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

virtual HRESULT __stdcall CallSetComplete( void) = 0;

};

#else    /* C style interface */

typedef struct ITPCCVtbl
{
BEGIN_INTERFACE

HRESULT ( STDMETHODCALLTYPE __RPC_FAR *QueryInterface )(
    ITPCC __RPC_FAR * This,
    /* [in] */ REFIID riid,
    /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject);

ULONG ( STDMETHODCALLTYPE __RPC_FAR *AddRef )(
    ITPCC __RPC_FAR * This);

ULONG ( STDMETHODCALLTYPE __RPC_FAR *Release )(
    ITPCC __RPC_FAR * This);

HRESULT ( __stdcall __RPC_FAR *NewOrder )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( __stdcall __RPC_FAR *Payment )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( __stdcall __RPC_FAR *Delivery )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( __stdcall __RPC_FAR *StockLevel )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

};

#endif

#endif

HRESULT ( __stdcall __RPC_FAR *OrderStatus )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( __stdcall __RPC_FAR *CallSetComplete )(
    ITPCC __RPC_FAR * This);

END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
};

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This->lpVtbl -> QueryInterface(This,riid,ppvObject))

#define ITPCC_AddRef(This) \
    (This->lpVtbl -> AddRef(This))

#define ITPCC_Release(This) \
    (This->lpVtbl -> Release(This))

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This->lpVtbl -> NewOrder(This,txn_in,txn_out))

#define ITPCC_Payment(This,txn_in,txn_out) \
    (This->lpVtbl -> Payment(This,txn_in,txn_out))

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This->lpVtbl -> Delivery(This,txn_in,txn_out))

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This->lpVtbl -> StockLevel(This,txn_in,txn_out))

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This->lpVtbl -> OrderStatus(This,txn_in,txn_out))

#define ITPCC_CallSetComplete(This) \
    (This->lpVtbl -> CallSetComplete(This))

#endif /* COBJMACROS */

#endif    /* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

```

```
HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);
```

```
void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);
```

```
void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);
```

```
void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);
```

```
void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC __RPC_FAR * This);
```

```
void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE pRpcMessage,
    DWORD *pdwStubPhase);
```

```
#endif /* __ITPCC_INTERFACE_DEFINED__ */
```

```
/* Additional Prototypes for ALL interfaces */
```

```
unsigned long __RPC_USER VARIANT_UserSize( unsigned long
__RPC_FAR *, unsigned long , VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserMarshal(
unsigned long __RPC_FAR *, unsigned char __RPC_FAR *, VARIANT
__RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER
VARIANT_UserUnmarshal(unsigned long __RPC_FAR *, unsigned char
__RPC_FAR *, VARIANT __RPC_FAR * );
void __RPC_USER VARIANT_UserFree( unsigned long
__RPC_FAR *, VARIANT __RPC_FAR * );
```

```
/* end of Additional Prototypes */
```

```
#ifdef __cplusplus
}
#endif

#endif
```

tpcc_com_ps.idl

```
/* FILE: ITPCC.IDL
* Microsoft TPC-C Kit Ver.
4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
*
* not yet audited
*
* PURPOSE: Defines the interface used by TPCC. This
interface can be implemented by C++ components.
*
* Change history:
* 4.20.000 - first version
*/
```

```
// Forward declare all types defined
interface ITPCC;
import "oidl.idl";
import "ocidl.idl";
```

```
[
    object,
    oleautomation,
    uuid(FEEE6AA2-84B1-11d2-BA47-00C04FBFE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
```

```
interface ITPCC : IUnknown
{
```

```
    HRESULT __stdcall NewOrder
```

```
        (
            [in]
            VARIANT txn_in,
            [out]
            VARIANT *txn_out
        );
```

```
    HRESULT __stdcall Payment
```

```
        (
            [in]
            VARIANT txn_in,
```

```

VARIANT *txn_out
);
HRESULT _stdcall Delivery
(
VARIANT txn_in,
[out]
VARIANT *txn_out
);
HRESULT _stdcall StockLevel
(
[in]
VARIANT txn_in,
[out]
VARIANT *txn_out
);
HRESULT _stdcall OrderStatus
(
[in]
VARIANT txn_in,
[out]
VARIANT *txn_out
);
HRESULT _stdcall CallSetComplete
(
);

}; // interface ITPCC

tpcc_com_ps_i.c

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */

/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_
#endif
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AXP64) */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run,appending), ms_ext, c_ext,
robust
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany), __declspec(novtable)
*/

```

```

DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,
0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64)*/

```

tpcc_com_ps_p.c

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the proxy stub code */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high enough to compile this file*/
#ifndef _REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef _RPCPROXY_H_VERSION__
#error this stub requires an updated version of <rpcproxy.h>
#endif // _RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 997
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0
x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,
0x46}} */

```

```

/* Object interface: ITPCC, ver. 0.0,

GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *)-1 /* ITPCC::NewOrder */,
    (void *)-1 /* ITPCC::Payment */,
    (void *)-1 /* ITPCC::Delivery */,
    (void *)-1 /* ITPCC::StockLevel */,
    (void *)-1 /* ITPCC::OrderStatus */,
    (void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

```

```

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x20000, /* Ndr library version */
    0,
    0x5030118, /* MIDL Version 5.3.280 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* Reserved3 */
    0, /* Reserved4 */
    0 /* Reserved5 */
};

#pragma data_seg(".rdata")

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this stub because it uses
these features:
#error -Oif or -Oicf, [wire_marshall] or [user_marshall] attribute.
#error However, your C/C++ compilation flags indicate you intend to run this
app on earlier systems.
#error This app will die there with the RPC_X_WRONG_STUB_VERSION
error.
#endif

static const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString =
{
    {
        0,
        {
            /* Procedure NewOrder */
            0x33, /*
FC_AUTO_HANDLE */

```


<pre> Oi2 */ /* 2 */ NdrFcLong(0x0), /* 0 */ /* 6 */ NdrFcShort(0x3), /* 3 */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined(_MIPS_) /* 8 */ NdrFcShort(0x1c), /* x86 Stack size/offset = 28 */ #else NdrFcShort(0x20), /* MIPS Stack size/offset = 32 */ #endif #else NdrFcShort(0x20), /* PPC Stack size/offset = 32 */ #endif #else NdrFcShort(0x28), /* Alpha Stack size/offset = 40 */ #endif /* 10 */ NdrFcShort(0x0), /* 0 */ /* 12 */ NdrFcShort(0x8), /* 8 */ /* 14 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has return, */ 0x3, /* 3 */ /* Parameter txn_in */ /* 16 */ NdrFcShort(0x8b), /* Flags: must size, must free, in, by val, */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined(_MIPS_) /* 18 */ NdrFcShort(0x4), /* x86 Stack size/offset = 4 */ #else NdrFcShort(0x8), /* MIPS Stack size/offset = 8 */ #endif #else NdrFcShort(0x8), /* PPC Stack size/offset = 8 */ #endif #else NdrFcShort(0x8), /* Alpha Stack size/offset = 8 */ #endif /* 20 */ NdrFcShort(0x3c8), /* Type Offset=968 */ /* Parameter txn_out */ /* 22 */ NdrFcShort(0x4113), /* Flags: must size, must free, out, simple ref, srv alloc size=16 */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined(_MIPS_) /* 24 */ NdrFcShort(0x14), /* x86 Stack size/offset = 20 */ #else NdrFcShort(0x18), /* MIPS Stack size/offset = 24 */ #endif #else NdrFcShort(0x18), /* PPC Stack size/offset = 24 */ #endif #else NdrFcShort(0x18), /* Alpha Stack size/offset = 24 */ #endif /* 26 */ NdrFcShort(0x3da), /* Type Offset=986 */ </pre>	<pre> /* Return value */ /* 28 */ NdrFcShort(0x70), /* Flags: out, return, base type, */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined(_MIPS_) /* 30 */ NdrFcShort(0x18), /* x86 Stack size/offset = 24 */ #else NdrFcShort(0x1c), /* MIPS Stack size/offset = 28 */ #endif #else NdrFcShort(0x1c), /* PPC Stack size/offset = 28 */ #endif #else NdrFcShort(0x20), /* Alpha Stack size/offset = 32 */ #endif /* 32 */ 0x8, /* FC_LONG */ 0x0, /* 0 */ /* Procedure Payment */ /* 34 */ 0x33, /* FC_AUTO_HANDLE */ 0x6c, /* Old Flags: object, Oi2 */ /* 36 */ NdrFcLong(0x0), /* 0 */ /* 40 */ NdrFcShort(0x4), /* 4 */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined(_MIPS_) /* 42 */ NdrFcShort(0x1c), /* x86 Stack size/offset = 28 */ #else NdrFcShort(0x20), /* MIPS Stack size/offset = 32 */ #endif #else NdrFcShort(0x20), /* PPC Stack size/offset = 32 */ #endif #else NdrFcShort(0x28), /* Alpha Stack size/offset = 40 */ #endif /* 44 */ NdrFcShort(0x0), /* 0 */ /* 46 */ NdrFcShort(0x8), /* 8 */ /* 48 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has return, */ 0x3, /* 3 */ /* Parameter txn_in */ /* 50 */ NdrFcShort(0x8b), /* Flags: must size, must free, in, by val, */ #ifdef _ALPHA_ #ifdef _PPC_ #if !defined(_MIPS_) /* 52 */ NdrFcShort(0x4), /* x86 Stack size/offset = 4 */ #else NdrFcShort(0x8), /* MIPS Stack size/offset = 8 */ #endif #else NdrFcShort(0x8), /* PPC Stack size/offset = 8 */ #endif #else NdrFcShort(0x8), /* Alpha Stack size/offset = 8 */ #endif </pre>
---	---

```

                NdrFcShort( 0x8 ), /* Alpha Stack
size/offset = 8 */
#endif
/* 54 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

        /* Parameter txn_out */

/* 56 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
                NdrFcShort( 0x18 ), /* MIPS Stack
size/offset = 24 */
#endif
#else
                NdrFcShort( 0x18 ), /* PPC Stack size/offset
= 24 */
#endif
#else
                NdrFcShort( 0x18 ), /* Alpha Stack
size/offset = 24 */
#endif
/* 60 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

        /* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
                NdrFcShort( 0x1c ), /* MIPS Stack
size/offset = 28 */
#endif
#else
                NdrFcShort( 0x1c ), /* PPC Stack size/offset
= 28 */
#endif
#else
                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 32 */
#endif
/* 66 */ 0x8, /* FC_LONG */
                0x0, /* 0 */

        /* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
                0x6c, /* Old Flags: object,
Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
                NdrFcShort( 0x20 ), /* MIPS Stack
size/offset = 32 */
#endif
#else
                NdrFcShort( 0x20 ), /* PPC Stack size/offset
= 32 */
#endif
#else
                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 40 */
#endif
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must size, clt must size, has
return, */
                0x3, /* 3 */

        /* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
                NdrFcShort( 0x8 ), /* MIPS Stack
size/offset = 8 */
#endif
#else
                NdrFcShort( 0x8 ), /* PPC Stack size/offset
= 8 */
#endif
#else
                NdrFcShort( 0x8 ), /* Alpha Stack
size/offset = 8 */
#endif
/* 88 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

        /* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
                NdrFcShort( 0x18 ), /* MIPS Stack
size/offset = 24 */
#endif
#else
                NdrFcShort( 0x18 ), /* PPC Stack size/offset
= 24 */
#endif
#else
                NdrFcShort( 0x18 ), /* Alpha Stack
size/offset = 24 */
#endif
/* 94 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

        /* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
                NdrFcShort( 0x1c ), /* MIPS Stack
size/offset = 28 */
#endif
#else
                NdrFcShort( 0x1c ), /* PPC Stack size/offset
= 28 */
#endif
#else
                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 28 */
#endif

```

```

#else
                                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 32 */
#endif
/* 100 */ 0x8,                /* FC_LONG */
                                0x0,                /* 0 */

                                /* Procedure StockLevel */

/* 102 */ 0x33,                /* FC_AUTO_HANDLE */
                                0x6c,                /* Old Flags: object,
Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
                                NdrFcShort( 0x20 ), /* MIPS Stack
size/offset = 32 */
#endif
#else
                                NdrFcShort( 0x20 ), /* PPC Stack size/offset
= 32 */
#endif
#else
                                NdrFcShort( 0x28 ), /* Alpha Stack
size/offset = 40 */
#endif
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7,                /* Oi2 Flags: srv must size, clt must size, has
return, */
                                0x3,                /* 3 */

                                /* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#else
                                NdrFcShort( 0x8 ), /* MIPS Stack
size/offset = 8 */
#endif
#else
                                NdrFcShort( 0x8 ), /* PPC Stack size/offset
= 8 */
#endif
#else
                                NdrFcShort( 0x8 ), /* Alpha Stack
size/offset = 8 */
#endif
/* 122 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

                                /* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#else
                                NdrFcShort( 0x18 ), /* MIPS Stack
size/offset = 24 */
#endif
#endif
#endif
#endif
                                NdrFcShort( 0x18 ), /* PPC Stack size/offset
= 24 */
#endif
#else
                                NdrFcShort( 0x18 ), /* Alpha Stack
size/offset = 24 */
#endif
/* 128 */ NdrFcShort( 0x3da ), /* Type Offset=986 */

                                /* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#else
                                NdrFcShort( 0x1c ), /* MIPS Stack
size/offset = 28 */
#endif
#else
                                NdrFcShort( 0x1c ), /* PPC Stack size/offset
= 28 */
#endif
#else
                                NdrFcShort( 0x20 ), /* Alpha Stack
size/offset = 32 */
#endif
/* 134 */ 0x8,                /* FC_LONG */
                                0x0,                /* 0 */

                                /* Procedure OrderStatus */

/* 136 */ 0x33,                /* FC_AUTO_HANDLE */
                                0x6c,                /* Old Flags: object,
Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#else
                                NdrFcShort( 0x20 ), /* MIPS Stack
size/offset = 32 */
#endif
#else
                                NdrFcShort( 0x20 ), /* PPC Stack size/offset
= 32 */
#endif
#else
                                NdrFcShort( 0x28 ), /* Alpha Stack
size/offset = 40 */
#endif
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7,                /* Oi2 Flags: srv must size, clt must size, has
return, */
                                0x3,                /* 3 */

                                /* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef defined(_MIPS_)

```



```

/* 88 */ NdrFcShort( 0xee ), /* Offset= 238 (326) */
/* 90 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 94 */ NdrFcShort( 0xfa ), /* Offset= 250 (344) */
/* 96 */ NdrFcLong( 0x24 ), /* 36 */
/* 100 */ NdrFcShort( 0x308 ), /* Offset= 776 (876) */
/* 102 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 106 */ NdrFcShort( 0x302 ), /* Offset= 770 (876) */
/* 108 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 112 */ NdrFcShort( 0x300 ), /* Offset= 768 (880) */
/* 114 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 118 */ NdrFcShort( 0x2fe ), /* Offset= 766 (884) */
/* 120 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 124 */ NdrFcShort( 0x2fc ), /* Offset= 764 (888) */
/* 126 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 130 */ NdrFcShort( 0x2fa ), /* Offset= 762 (892) */
/* 132 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 136 */ NdrFcShort( 0x2f8 ), /* Offset= 760 (896) */
/* 138 */ NdrFcLong( 0x400b ), /* 16395 */
/* 142 */ NdrFcShort( 0x2e6 ), /* Offset= 742 (884) */
/* 144 */ NdrFcLong( 0x400a ), /* 16394 */
/* 148 */ NdrFcShort( 0x2e4 ), /* Offset= 740 (888) */
/* 150 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 154 */ NdrFcShort( 0x2ea ), /* Offset= 746 (900) */
/* 156 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 160 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (896) */
/* 162 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 166 */ NdrFcShort( 0x2e2 ), /* Offset= 738 (904) */
/* 168 */ NdrFcLong( 0x400d ), /* 16397 */
/* 172 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (908) */
/* 174 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 178 */ NdrFcShort( 0x2de ), /* Offset= 734 (912) */
/* 180 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 184 */ NdrFcShort( 0x2dc ), /* Offset= 732 (916) */
/* 186 */ NdrFcLong( 0x400c ), /* 16396 */
/* 190 */ NdrFcShort( 0x2da ), /* Offset= 730 (920) */
/* 192 */ NdrFcLong( 0x10 ), /* 16 */
/* 196 */ NdrFcShort( 0x8002 ), /* Simple arm type: FC_CHAR */
/* 198 */ NdrFcLong( 0x12 ), /* 18 */
/* 202 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 204 */ NdrFcLong( 0x13 ), /* 19 */
/* 208 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 210 */ NdrFcLong( 0x16 ), /* 22 */
/* 214 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 216 */ NdrFcLong( 0x17 ), /* 23 */
/* 220 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 222 */ NdrFcLong( 0xe ), /* 14 */
/* 226 */ NdrFcShort( 0x2be ), /* Offset= 702 (928) */
/* 228 */ NdrFcLong( 0x400e ), /* 16398 */
/* 232 */ NdrFcShort( 0x2c4 ), /* Offset= 708 (940) */
/* 234 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 238 */ NdrFcShort( 0x2c2 ), /* Offset= 706 (944) */
/* 240 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 244 */ NdrFcShort( 0x280 ), /* Offset= 640 (884) */
/* 246 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 250 */ NdrFcShort( 0x27e ), /* Offset= 638 (888) */
/* 252 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 256 */ NdrFcShort( 0x278 ), /* Offset= 632 (888) */
/* 258 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 262 */ NdrFcShort( 0x272 ), /* Offset= 626 (888) */
/* 264 */ NdrFcLong( 0x0 ), /* 0 */
/* 268 */ NdrFcShort( 0x0 ), /* Offset= 0 (268) */
/* 270 */ NdrFcLong( 0x1 ), /* 1 */
/* 274 */ NdrFcShort( 0x0 ), /* Offset= 0 (274) */
/* 276 */ NdrFcShort( 0xfffffff ), /* Offset= -1 (275) */
/* 278 */
0x15, /* FC_STRUCT */
0x7, /* 7 */
/* 280 */ NdrFcShort( 0x8 ), /* 8 */
/* 282 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 284 */
0x12, 0x0, /* FC_UP */
/* 286 */ NdrFcShort( 0xc ), /* Offset= 12 (298) */
/* 288 */
0x1b, /* FC_CARRAY */
0x1, /* 1 */
/* 290 */ NdrFcShort( 0x2 ), /* 2 */
/* 292 */ 0x9, /* Corr desc: FC_ULONG */
0x0, /* */
/* 294 */ NdrFcShort( 0xfffc ), /* -4 */
/* 296 */ 0x6, /* FC_SHORT */
0x5b, /* FC_END */
/* 298 */
0x17, /* FC_CSTRUCT */
0x3, /* 3 */
/* 300 */ NdrFcShort( 0x8 ), /* 8 */
/* 302 */ NdrFcShort( 0xfffff2 ), /* Offset= -14 (288) */
/* 304 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 306 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 308 */
0x2f, /* FC_IP */
0x5a, /* */
FC_CONSTANT_IID */
/* 310 */ NdrFcLong( 0x0 ), /* 0 */
/* 314 */ NdrFcShort( 0x0 ), /* 0 */
/* 316 */ NdrFcShort( 0x0 ), /* 0 */
/* 318 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 320 */ 0x0, /* 0 */
0x0, /* 0 */
/* 322 */ 0x0, /* 0 */
0x0, /* 0 */
/* 324 */ 0x0, /* 0 */
0x46, /* 70 */
/* 326 */
0x2f, /* FC_IP */
0x5a, /* */
FC_CONSTANT_IID */
/* 328 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 332 */ NdrFcShort( 0x0 ), /* 0 */
/* 334 */ NdrFcShort( 0x0 ), /* 0 */
/* 336 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 338 */ 0x0, /* 0 */
0x0, /* 0 */
/* 340 */ 0x0, /* 0 */
0x0, /* 0 */
/* 342 */ 0x0, /* 0 */
0x46, /* 70 */
/* 344 */
0x12, 0x10, /* FC_UP */
[pointer_deref] */
/* 346 */ NdrFcShort( 0x2 ), /* Offset= 2 (348) */
/* 348 */
0x12, 0x0, /* FC_UP */
/* 350 */ NdrFcShort( 0x1fc ), /* Offset= 508 (858) */
/* 352 */
0x2a, /* */
FC_ENCAPSULATED_UNION */
0x49, /* 73 */
/* 354 */ NdrFcShort( 0x18 ), /* 24 */
/* 356 */ NdrFcShort( 0xa ), /* 10 */
/* 358 */ NdrFcLong( 0x8 ), /* 8 */
/* 362 */ NdrFcShort( 0x58 ), /* Offset= 88 (450) */

```

```

/* 364 */ NdrFcLong( 0xd ), /* 13 */
/* 368 */ NdrFcShort( 0x78 ), /* Offset= 120 (488) */
/* 370 */ NdrFcLong( 0x9 ), /* 9 */
/* 374 */ NdrFcShort( 0x94 ), /* Offset= 148 (522) */
/* 376 */ NdrFcLong( 0xc ), /* 12 */
/* 380 */ NdrFcShort( 0xbc ), /* Offset= 188 (568) */
/* 382 */ NdrFcLong( 0x24 ), /* 36 */
/* 386 */ NdrFcShort( 0x114 ), /* Offset= 276 (662) */
/* 388 */ NdrFcLong( 0x800d ), /* 32781 */
/* 392 */ NdrFcShort( 0x130 ), /* Offset= 304 (696) */
/* 394 */ NdrFcLong( 0x10 ), /* 16 */
/* 398 */ NdrFcShort( 0x148 ), /* Offset= 328 (726) */
/* 400 */ NdrFcLong( 0x2 ), /* 2 */
/* 404 */ NdrFcShort( 0x160 ), /* Offset= 352 (756) */
/* 406 */ NdrFcLong( 0x3 ), /* 3 */
/* 410 */ NdrFcShort( 0x178 ), /* Offset= 376 (786) */
/* 412 */ NdrFcLong( 0x14 ), /* 20 */
/* 416 */ NdrFcShort( 0x190 ), /* Offset= 400 (816) */
/* 418 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (417) */
/* 420 */
0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 422 */ NdrFcShort( 0x4 ), /* 4 */
/* 424 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 426 */ NdrFcShort( 0x0 ), /* 0 */
/* 428 */
0x4b, /* FC_PP */
0x5c, /* FC_PAD */
/* 430 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 432 */ NdrFcShort( 0x4 ), /* 4 */
/* 434 */ NdrFcShort( 0x0 ), /* 0 */
/* 436 */ NdrFcShort( 0x1 ), /* 1 */
/* 438 */ NdrFcShort( 0x0 ), /* 0 */
/* 440 */ NdrFcShort( 0x0 ), /* 0 */
/* 442 */ 0x12, 0x0, /* FC_UP */
/* 444 */ NdrFcShort( 0xffffffff6e ), /* Offset= -146 (298) */
/* 446 */
0x5b, /* FC_END */
0x8, /* FC_LONG */
/* 448 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 450 */
0x16, /* FC_PSTRUCT */
0x3, /* 3 */
/* 452 */ NdrFcShort( 0x8 ), /* 8 */
/* 454 */
0x4b, /* FC_PP */
0x5c, /* FC_PAD */
/* 456 */
0x46, /* FC_NO_REPEAT */
0x5c, /* FC_PAD */
/* 458 */ NdrFcShort( 0x4 ), /* 4 */
/* 460 */ NdrFcShort( 0x4 ), /* 4 */
/* 462 */ 0x11, 0x0, /* FC_RP */
/* 464 */ NdrFcShort( 0xffffffffd4 ), /* Offset= -44 (420) */
/* 466 */
0x5b, /* FC_END */
0x8, /* FC_LONG */
/* 468 */ 0x8, /* FC_LONG */
0x5b, /* FC_END */
/* 470 */
FC_BOGUS_ARRAY */
0x21, /*
0x3, /* 3 */
/* 472 */ NdrFcShort( 0x0 ), /* 0 */
/* 474 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 476 */ NdrFcShort( 0x0 ), /* 0 */
/* 478 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 482 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 484 */ NdrFcShort( 0xffffffff50 ), /* Offset= -176 (308) */
/* 486 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 488 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 490 */ NdrFcShort( 0x8 ), /* 8 */
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x6 ), /* Offset= 6 (500) */
/* 496 */ 0x8, /* FC_LONG */
0x36, /* FC_POINTER */
/* 498 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 500 */
0x11, 0x0, /* FC_RP */
/* 502 */ NdrFcShort( 0xffffffffe0 ), /* Offset= -32 (470) */
/* 504 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 510 */ NdrFcShort( 0x0 ), /* 0 */
/* 512 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 518 */ NdrFcShort( 0xffffffff40 ), /* Offset= -192 (326) */
/* 520 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 522 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 524 */ NdrFcShort( 0x8 ), /* 8 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8, /* FC_LONG */
0x36, /* FC_POINTER */
/* 532 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 534 */
0x11, 0x0, /* FC_RP */
/* 536 */ NdrFcShort( 0xffffffffe0 ), /* Offset= -32 (504) */
/* 538 */
0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 540 */ NdrFcShort( 0x4 ), /* 4 */
/* 542 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */
0x4b, /* FC_PP */
0x5c, /* FC_PAD */
/* 548 */
0x48, /*
FC_VARIABLE_REPEAT */

```

```

0x49, /*
FC_FIXED_OFFSET */
/* 550 */ NdrFcShort( 0x4 ), /* 4 */
/* 552 */ NdrFcShort( 0x0 ), /* 0 */
/* 554 */ NdrFcShort( 0x1 ), /* 1 */
/* 556 */ NdrFcShort( 0x0 ), /* 0 */
/* 558 */ NdrFcShort( 0x0 ), /* 0 */
/* 560 */ 0x12, 0x0, /* FC_UP */
/* 562 */ NdrFcShort( 0x182 ), /* Offset= 386 (948) */
/* 564 */
0x5b, /* FC_END */
0x8, /* FC_LONG */
/* 566 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 568 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 570 */ NdrFcShort( 0x8 ), /* 8 */
/* 572 */ NdrFcShort( 0x0 ), /* 0 */
/* 574 */ NdrFcShort( 0x6 ), /* Offset= 6 (580) */
/* 576 */ 0x8, /* FC_LONG */
0x36, /* FC_POINTER */
/* 578 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 580 */
0x11, 0x0, /* FC_RP */
/* 582 */ NdrFcShort( 0xfffffd4 ), /* Offset= -44 (538) */
/* 584 */
0x2f, /* FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 586 */ NdrFcLong( 0x2f ), /* 47 */
/* 590 */ NdrFcShort( 0x0 ), /* 0 */
/* 592 */ NdrFcShort( 0x0 ), /* 0 */
/* 594 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 596 */ 0x0, /* 0 */
0x0, /* 0 */
/* 598 */ 0x0, /* 0 */
0x0, /* 0 */
/* 600 */ 0x0, /* 0 */
0x46, /* 70 */
/* 602 */
0x1b, /* FC_CARRAY */
0x0, /* 0 */
/* 604 */ NdrFcShort( 0x1 ), /* 1 */
/* 606 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 608 */ NdrFcShort( 0x4 ), /* 4 */
/* 610 */ 0x1, /* FC_BYTE */
0x5b, /* FC_END */
/* 612 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 614 */ NdrFcShort( 0x10 ), /* 16 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ NdrFcShort( 0xa ), /* Offset= 10 (628) */
/* 620 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 622 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 624 */ NdrFcShort( 0xfffffd8 ), /* Offset= -40 (584) */
/* 626 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 628 */
0x12, 0x0, /* FC_UP */
/* 630 */ NdrFcShort( 0xfffffe4 ), /* Offset= -28 (602) */
/* 632 */
0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 634 */ NdrFcShort( 0x4 ), /* 4 */
/* 636 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 638 */ NdrFcShort( 0x0 ), /* 0 */
/* 640 */
0x4b, /* FC_PP */
0x5c, /* FC_PAD */
/* 642 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 644 */ NdrFcShort( 0x4 ), /* 4 */
/* 646 */ NdrFcShort( 0x0 ), /* 0 */
/* 648 */ NdrFcShort( 0x1 ), /* 1 */
/* 650 */ NdrFcShort( 0x0 ), /* 0 */
/* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 654 */ 0x12, 0x0, /* FC_UP */
/* 656 */ NdrFcShort( 0xfffffd4 ), /* Offset= -44 (612) */
/* 658 */
0x5b, /* FC_END */
0x8, /* FC_LONG */
/* 660 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 662 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 664 */ NdrFcShort( 0x8 ), /* 8 */
/* 666 */ NdrFcShort( 0x0 ), /* 0 */
/* 668 */ NdrFcShort( 0x6 ), /* Offset= 6 (674) */
/* 670 */ 0x8, /* FC_LONG */
0x36, /* FC_POINTER */
/* 672 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 674 */
0x11, 0x0, /* FC_RP */
/* 676 */ NdrFcShort( 0xfffffd4 ), /* Offset= -44 (632) */
/* 678 */
0x1d, /* FC_SMFARRAY */
0x0, /* 0 */
/* 680 */ NdrFcShort( 0x8 ), /* 8 */
/* 682 */ 0x2, /* FC_CHAR */
0x5b, /* FC_END */
/* 684 */
0x15, /* FC_STRUCT */
0x3, /* 3 */
/* 686 */ NdrFcShort( 0x10 ), /* 16 */
/* 688 */ 0x8, /* FC_LONG */
0x6, /* FC_SHORT */
/* 690 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 692 */ 0x0, /* 0 */
NdrFcShort( 0xfffffff1 ), /* Offset=
-15 (678) */
0x5b, /* FC_END */
/* 696 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 698 */ NdrFcShort( 0x18 ), /* 24 */

```

/* 700 */ NdrFcShort(0x0), /* 0 */	/* 774 */ 0x8, /* FC_LONG */
/* 702 */ NdrFcShort(0xa), /* Offset= 10 (712) */	0x5b, /* FC_END */
/* 704 */ 0x8, /* FC_LONG */	/* 776 */
/* 706 */ 0x4c, 0x36, /* FC_POINTER */	0x1b, /* FC_CARRY */
/* 708 */ NdrFcShort(0xfffffe8), /* Offset= -24 (684) */	0x3, /* 3 */
/* 710 */ 0x5c, /* FC_EMBEDDED_COMPLEX */	/* 778 */ NdrFcShort(0x4), /* 4 */
/* 712 */ 0x0, /* 0 */	/* 780 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
/* 714 */ NdrFcShort(0xfffff0c), /* Offset= -244 (470) */	0x0, /* 0 */
/* 716 */ 0x1b, /* FC_CARRY */	/* 782 */ NdrFcShort(0x0), /* 0 */
0x0, /* 0 */	/* 784 */ 0x8, /* FC_LONG */
/* 718 */ NdrFcShort(0x1), /* 1 */	0x5b, /* FC_END */
/* 720 */ 0x19, /* Corr desc: field pointer, FC_ULONG */	/* 786 */
0x0, /* 0 */	0x16, /* FC_PSTRUCT */
/* 722 */ NdrFcShort(0x0), /* 0 */	0x3, /* 3 */
/* 724 */ 0x1, /* FC_BYTE */	/* 788 */ NdrFcShort(0x8), /* 8 */
/* 726 */ 0x5b, /* FC_END */	/* 790 */
0x16, /* FC_PSTRUCT */	0x4b, /* FC_PP */
0x3, /* 3 */	0x5c, /* FC_PAD */
/* 728 */ NdrFcShort(0x8), /* 8 */	/* 792 */
/* 730 */ 0x4b, /* FC_PP */	0x46, /* FC_NO_REPEAT */
0x5c, /* FC_PAD */	0x5c, /* FC_PAD */
/* 732 */ 0x46, /* FC_NO_REPEAT */	/* 794 */ NdrFcShort(0x4), /* 4 */
0x5c, /* FC_PAD */	/* 796 */ NdrFcShort(0x4), /* 4 */
/* 734 */ NdrFcShort(0x4), /* 4 */	/* 798 */ 0x12, 0x0, /* FC_UP */
/* 736 */ NdrFcShort(0x4), /* 4 */	/* 800 */ NdrFcShort(0xfffffe8), /* Offset= -24 (776) */
/* 738 */ 0x12, 0x0, /* FC_UP */	/* 802 */
/* 740 */ NdrFcShort(0xfffffe8), /* Offset= -24 (716) */	0x5b, /* FC_END */
/* 742 */ 0x5b, /* FC_END */	0x8, /* FC_LONG */
0x8, /* FC_LONG */	/* 804 */ 0x8, /* FC_LONG */
/* 744 */ 0x8, /* FC_LONG */	0x5b, /* FC_END */
/* 746 */ 0x5b, /* FC_END */	/* 806 */
0x1b, /* FC_CARRY */	0x1b, /* FC_CARRY */
0x1, /* 1 */	0x7, /* 7 */
/* 748 */ NdrFcShort(0x2), /* 2 */	/* 808 */ NdrFcShort(0x8), /* 8 */
/* 750 */ 0x19, /* Corr desc: field pointer, FC_ULONG */	/* 810 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* 0 */	0x0, /* 0 */
/* 752 */ NdrFcShort(0x0), /* 0 */	/* 812 */ NdrFcShort(0x0), /* 0 */
/* 754 */ 0x6, /* FC_SHORT */	/* 814 */ 0xb, /* FC_HYPER */
/* 756 */ 0x5b, /* FC_END */	0x5b, /* FC_END */
0x16, /* FC_PSTRUCT */	/* 816 */
0x3, /* 3 */	0x16, /* FC_PSTRUCT */
/* 758 */ NdrFcShort(0x8), /* 8 */	0x3, /* 3 */
/* 760 */ 0x4b, /* FC_PP */	/* 818 */ NdrFcShort(0x8), /* 8 */
0x5c, /* FC_PAD */	/* 820 */
0x46, /* FC_NO_REPEAT */	0x4b, /* FC_PP */
0x5c, /* FC_PAD */	0x5c, /* FC_PAD */
/* 762 */ 0x46, /* FC_NO_REPEAT */	/* 822 */
0x5c, /* FC_PAD */	0x46, /* FC_NO_REPEAT */
/* 764 */ NdrFcShort(0x4), /* 4 */	0x5c, /* FC_PAD */
/* 766 */ NdrFcShort(0x4), /* 4 */	/* 824 */ NdrFcShort(0x4), /* 4 */
/* 768 */ 0x12, 0x0, /* FC_UP */	/* 826 */ NdrFcShort(0x4), /* 4 */
/* 770 */ NdrFcShort(0xfffffe8), /* Offset= -24 (746) */	/* 828 */ 0x12, 0x0, /* FC_UP */
/* 772 */ 0x5b, /* FC_END */	/* 830 */ NdrFcShort(0xfffffe8), /* Offset= -24 (806) */
0x8, /* FC_LONG */	/* 832 */
0x5b, /* FC_END */	0x5b, /* FC_END */
0x8, /* FC_LONG */	0x8, /* FC_LONG */
0x5b, /* FC_END */	/* 834 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */	0x5b, /* FC_END */
0x5b, /* FC_END */	/* 836 */
0x8, /* FC_LONG */	0x15, /* FC_STRUCT */
0x5b, /* FC_END */	0x3, /* 3 */
0x8, /* FC_LONG */	/* 838 */ NdrFcShort(0x8), /* 8 */
0x5b, /* FC_END */	/* 840 */ 0x8, /* FC_LONG */
0x5b, /* FC_END */	0x8, /* FC_LONG */
0x5b, /* FC_END */	/* 842 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */	0x5b, /* FC_END */


```

/* 844 */
                                0x1b, /* FC_CARRAY */
                                0x3, /* 3 */
/* 846 */ NdrFcShort( 0x8 ), /* 8 */
/* 848 */ 0x7, /* Corr desc: FC_USHORT */
                                0x0, /* */
/* 850 */ NdrFcShort( 0xfffd8 ), /* -40 */
/* 852 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
                                0x0, /* 0 */
/* 854 */ NdrFcShort( 0xfffffee ), /* Offset= -18 (836) */
/* 856 */ 0x5c, /* FC_PAD */
                                0x5b, /* FC_END */
/* 858 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /* 3 */
/* 860 */ NdrFcShort( 0x28 ), /* 40 */
/* 862 */ NdrFcShort( 0xfffffee ), /* Offset= -18 (844) */
/* 864 */ NdrFcShort( 0x0 ), /* Offset= 0 (864) */
/* 866 */ 0x6, /* FC_SHORT */
                                0x6, /* FC_SHORT */
/* 868 */ 0x38, /* FC_ALIGNM4 */
                                0x8, /* FC_LONG */
/* 870 */ 0x8, /* FC_LONG */
                                0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 872 */ 0x0, /* 0 */
                                NdrFcShort( 0xfffffd7 ), /* Offset=
-521 (352) */
                                0x5b, /* FC_END */
/* 876 */
                                0x12, 0x0, /* FC_UP */
/* 878 */ NdrFcShort( 0xfffffe6 ), /* Offset= -266 (612) */
/* 880 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 882 */ 0x1, /* FC_BYTE */
                                0x5c, /* FC_PAD */
/* 884 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 886 */ 0x6, /* FC_SHORT */
                                0x5c, /* FC_PAD */
/* 888 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 890 */ 0x8, /* FC_LONG */
                                0x5c, /* FC_PAD */
/* 892 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 894 */ 0xa, /* FC_FLOAT */
                                0x5c, /* FC_PAD */
/* 896 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 898 */ 0xc, /* FC_DOUBLE */
                                0x5c, /* FC_PAD */
/* 900 */
                                0x12, 0x0, /* FC_UP */
/* 902 */ NdrFcShort( 0xfffffd90 ), /* Offset= -624 (278) */
/* 904 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 906 */ NdrFcShort( 0xfffffd92 ), /* Offset= -622 (284) */
/* 908 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 910 */ NdrFcShort( 0xffffda6 ), /* Offset= -602 (308) */
/* 912 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 914 */ NdrFcShort( 0xffffdb4 ), /* Offset= -588 (326) */

/* 916 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 918 */ NdrFcShort( 0xffffdc2 ), /* Offset= -574 (344) */
/* 920 */
                                0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 922 */ NdrFcShort( 0x2 ), /* Offset= 2 (924) */
/* 924 */
                                0x12, 0x0, /* FC_UP */
/* 926 */ NdrFcShort( 0x16 ), /* Offset= 22 (948) */
/* 928 */
                                0x15, /* FC_STRUCT */
                                0x7, /* 7 */
/* 930 */ NdrFcShort( 0x10 ), /* 16 */
/* 932 */ 0x6, /* FC_SHORT */
                                0x1, /* FC_BYTE */
/* 934 */ 0x1, /* FC_BYTE */
                                0x38, /* FC_ALIGNM4 */
/* 936 */ 0x8, /* FC_LONG */
                                0x39, /* FC_ALIGNM8 */
/* 938 */ 0xb, /* FC_HYPER */
                                0x5b, /* FC_END */
/* 940 */
                                0x12, 0x0, /* FC_UP */
/* 942 */ NdrFcShort( 0xfffffd2 ), /* Offset= -14 (928) */
/* 944 */
                                0x12, 0x8, /* FC_UP [simple_pointer] */
/* 946 */ 0x2, /* FC_CHAR */
                                0x5c, /* FC_PAD */
/* 948 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x7, /* 7 */
/* 950 */ NdrFcShort( 0x20 ), /* 32 */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x0 ), /* Offset= 0 (954) */
/* 956 */ 0x8, /* FC_LONG */
                                0x8, /* FC_LONG */
/* 958 */ 0x6, /* FC_SHORT */
                                0x6, /* FC_SHORT */
/* 960 */ 0x6, /* FC_SHORT */
                                0x6, /* FC_SHORT */
/* 962 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
                                0x0, /* 0 */
/* 964 */ NdrFcShort( 0xffffc42 ), /* Offset= -958 (6) */
/* 966 */ 0x5c, /* FC_PAD */
                                0x5b, /* FC_END */
/* 968 */ 0xb4, /* FC_USER_MARSHAL */
                                0x83, /* 131 */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x10 ), /* 16 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xffffc32 ), /* Offset= -974 (2) */
/* 978 */
                                0x11, 0x4, /* FC_RP [allocated_on_stack] */
/* 980 */ NdrFcShort( 0x6 ), /* Offset= 6 (986) */
/* 982 */
                                0x13, 0x0, /* FC_OP */
/* 984 */ NdrFcShort( 0xfffffdc ), /* Offset= -36 (948) */
/* 986 */ 0xb4, /* FC_USER_MARSHAL */
                                0x83, /* 131 */
/* 988 */ NdrFcShort( 0x0 ), /* 0 */
/* 990 */ NdrFcShort( 0x10 ), /* 16 */
/* 992 */ NdrFcShort( 0x0 ), /* 0 */
/* 994 */ NdrFcShort( 0xffffff4 ), /* Offset= -12 (982) */
                                0x0

```

```

    }
};

const CInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
    (CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
    (CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)    IID_GENERIC_CHECK_IID(
    _tpcc_com_ps, pIID, n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName *) &_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    &_tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* !defined(_M_IA64) && !defined(_M_AXP64)*/

#pragma warning( disable: 4049 ) /* more than 64k source lines */

/* this ALWAYS GENERATED file contains the proxy stub code */

/* File created by MIDL compiler version 5.03.0280 */
/* at Sat Apr 08 16:40:10 2000 */
/*
/* Compiler settings for \src\tpcc_com_ps.idl:
    Oicf (OptLev=i2), W1, Zp8, env=Win64 (32b run,appending), ms_ext, c_ext,
    robust
    error checks: allocation ref bounds_check enum stub_data

```

```

VC __declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#ifdef _M_IA64 || defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high enough to compile this file*/
#ifndef _REDQ_RPCPROXY_H_VERSION_
#define _REQUIRED_RPCPROXY_H_VERSION_ 475
#endif

#include "rpcproxy.h"
#ifndef _RPCPROXY_H_VERSION_
#error this stub requires an updated version of <rpcproxy.h>
#endif // _RPCPROXY_H_VERSION_

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 979
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,
x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,
0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,
0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

```

```

#pragma code_seg(".orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
    0,
    44,
    88,
    132,
    176,
    220
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *)-1 /* ITPCC::NewOrder */,
    (void *)-1 /* ITPCC::Payment */,
    (void *)-1 /* ITPCC::Delivery */,
    (void *)-1 /* ITPCC::StockLevel */,
    (void *)-1 /* ITPCC::OrderStatus */,
    (void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
}

```

```

0,
0,
0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x50002, /* Ndr library version */
    0,
    0x5030118, /* MIDL Version 5.3.280 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* Reserved3 */
    0, /* Reserved4 */
    0 /* Reserved5 */
};

#pragma data_seg(".rdata")

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

#ifdef __RPC_WIN64__
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING __MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        FC_AUTO_HANDLE /*
            0x33, /*
            0x6c, /* Old Flags: object,
            Oi2 */
            /* 2 */ NdrFcLong( 0x0 ), /* 0 */
            /* 6 */ NdrFcShort( 0x3 ), /* 3 */
#ifdef _ALPHA_
            /* 8 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
            NdrFcShort( 0x30 ), /* axp64 Stack
            size/offset = 48 */
#endif
            /* 10 */ NdrFcShort( 0x0 ), /* 0 */
            /* 12 */ NdrFcShort( 0x8 ), /* 8 */
            /* 14 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
            return, has ext, */
            0x3, /* 3 */
            /* 16 */ 0xa, /* 10 */
            0x7, /* Ext Flags: new corr
            desc, clt corr check, srv corr check, */
            /* 18 */ NdrFcShort( 0x20 ), /* 32 */
            /* 20 */ NdrFcShort( 0x20 ), /* 32 */
            /* 22 */ NdrFcShort( 0x0 ), /* 0 */
            /* 24 */ NdrFcShort( 0x0 ), /* 0 */
}
}

```

```

/* Parameter txn_in */
/* 26 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 28 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 30 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 32 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 34 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 36 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 40 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack
size/offset = 40 */
#endif
/* 42 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Payment */

/* 44 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object,
Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
#ifdef _ALPHA_
/* 52 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack
size/offset = 48 */
#endif
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
0x3, /* 3 */
/* 60 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr
desc, clt corr check, srv corr check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 70 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 72 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else

```

```

NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 74 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 76 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 78 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 80 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 84 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack
size/offset = 40 */
#endif
/* 86 */ 0x8, /* FC_LONG */
0x0, /* 0 */

/* Procedure Delivery */

/* 88 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object,
Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
#ifdef _ALPHA_
/* 96 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack
size/offset = 48 */
#endif
/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
0x3, /* 3 */
/* 104 */ 0xa, /* 10 */
0x7, /* Ext Flags: new corr
desc, clt corr check, srv corr check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 116 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 118 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

```

```

/* 120 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 122 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 124 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 128 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack
size/offset = 40 */
#endif
/* 130 */ 0x8, /* FC_LONG */
/* 0 */

/* Procedure StockLevel */

/* 132 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object,
Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
#ifdef _ALPHA_
/* 140 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack
size/offset = 48 */
#endif
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
/* 148 */ 0xa, /* 3 */
/* 10 */
0x7, /* Ext Flags: new corr
desc, clt corr check, srv corr check, */
/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 160 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 206 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 210 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 212 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 168 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_
/* 172 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack
size/offset = 40 */
#endif
/* 174 */ 0x8, /* FC_LONG */
/* 0 */

/* Procedure OrderStatus */

/* 176 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object,
Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
#ifdef _ALPHA_
/* 184 */ NdrFcShort( 0x38 ), /* ia64 Stack size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack
size/offset = 48 */
#endif
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47, /* Oi2 Flags: srv must size, clt must size, has
return, has ext, */
/* 192 */ 0xa, /* 3 */
/* 10 */
0x7, /* Ext Flags: new corr
desc, clt corr check, srv corr check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by val, */
#ifdef _ALPHA_
/* 204 */ NdrFcShort( 0x10 ), /* ia64 Stack size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack
size/offset = 8 */
#endif
/* 206 */ NdrFcShort( 0x3b6 ), /* Type Offset=950 */

/* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple ref, srv alloc size=24 */
#ifdef _ALPHA_
/* 210 */ NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack
size/offset = 32 */
#endif
/* 212 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */

/* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA_

```

```

/* 216 */ NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
                                NdrFcShort( 0x28 ), /* xpp64 Stack
size/offset = 40 */
#endif
/* 218 */ 0x8, /* FC_LONG */
                                0x0, /* 0 */

/* Procedure CallSetComplete */

/* 220 */ 0x33, /* FC_AUTO_HANDLE */
                                0x6c, /* Old Flags: object,
Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64, xpp64 Stack size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44, /* Oi2 Flags: has return, has ext, */
                                0x1, /* 1 */

/* 236 */ 0xa, /* 10 */
                                0x1, /* Ext Flags: new corr
desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

/* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64, xpp64 Stack size/offset = 8 */
/* 250 */ 0x8, /* FC_LONG */
                                0x0, /* 0 */

                                0x0

}
};

static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /* 0 */

/* 2 */
                                0x12, 0x0, /* FC_UP */
/* 4 */ NdrFcShort( 0x39e ), /* Offset= 926 (930) */
/* 6 */
                                0x2b, /*
FC_NON_ENCAPSULATED_UNION */
                                0x9, /* FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT */
                                0x0, /* */
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 14 */ NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */ NdrFcShort( 0x10 ), /* 16 */
/* 18 */ NdrFcShort( 0x2b ), /* 43 */
/* 20 */ NdrFcLong( 0x3 ), /* 3 */
/* 24 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 26 */ NdrFcLong( 0x11 ), /* 17 */
/* 30 */ NdrFcShort( 0x8001 ), /* Simple arm type: FC_BYTE */
/* 32 */ NdrFcLong( 0x2 ), /* 2 */
/* 36 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 38 */ NdrFcLong( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x800a ), /* Simple arm type: FC_FLOAT */
/* 44 */ NdrFcLong( 0x5 ), /* 5 */

/* 48 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE
*/
/* 50 */ NdrFcLong( 0xb ), /* 11 */
/* 54 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 56 */ NdrFcLong( 0xa ), /* 10 */
/* 60 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 62 */ NdrFcLong( 0x6 ), /* 6 */
/* 66 */ NdrFcShort( 0xd6 ), /* Offset= 214 (280) */
/* 68 */ NdrFcLong( 0x7 ), /* 7 */
/* 72 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE
*/
/* 74 */ NdrFcLong( 0x8 ), /* 8 */
/* 78 */ NdrFcShort( 0xd0 ), /* Offset= 208 (286) */
/* 80 */ NdrFcLong( 0xd ), /* 13 */
/* 84 */ NdrFcShort( 0xe4 ), /* Offset= 228 (312) */
/* 86 */ NdrFcLong( 0x9 ), /* 9 */
/* 90 */ NdrFcShort( 0xf0 ), /* Offset= 240 (330) */
/* 92 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 96 */ NdrFcShort( 0xfc ), /* Offset= 252 (348) */
/* 98 */ NdrFcLong( 0x24 ), /* 36 */
/* 102 */ NdrFcShort( 0x2f4 ), /* Offset= 756 (858) */
/* 104 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 108 */ NdrFcShort( 0x2ee ), /* Offset= 750 (858) */
/* 110 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 114 */ NdrFcShort( 0x2ec ), /* Offset= 748 (862) */
/* 116 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 120 */ NdrFcShort( 0x2ea ), /* Offset= 746 (866) */
/* 122 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 126 */ NdrFcShort( 0x2e8 ), /* Offset= 744 (870) */
/* 128 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 132 */ NdrFcShort( 0x2e6 ), /* Offset= 742 (874) */
/* 134 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 138 */ NdrFcShort( 0x2e4 ), /* Offset= 740 (878) */
/* 140 */ NdrFcLong( 0x400b ), /* 16395 */
/* 144 */ NdrFcShort( 0x2d2 ), /* Offset= 722 (866) */
/* 146 */ NdrFcLong( 0x400a ), /* 16394 */
/* 150 */ NdrFcShort( 0x2d0 ), /* Offset= 720 (870) */
/* 152 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 156 */ NdrFcShort( 0x2d6 ), /* Offset= 726 (882) */
/* 158 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 162 */ NdrFcShort( 0x2cc ), /* Offset= 716 (878) */
/* 164 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 168 */ NdrFcShort( 0x2ce ), /* Offset= 718 (886) */
/* 170 */ NdrFcLong( 0x400d ), /* 16397 */
/* 174 */ NdrFcShort( 0x2cc ), /* Offset= 716 (890) */
/* 176 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 180 */ NdrFcShort( 0x2ca ), /* Offset= 714 (894) */
/* 182 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 186 */ NdrFcShort( 0x2c8 ), /* Offset= 712 (898) */
/* 188 */ NdrFcLong( 0x400c ), /* 16396 */
/* 192 */ NdrFcShort( 0x2c6 ), /* Offset= 710 (902) */
/* 194 */ NdrFcLong( 0x10 ), /* 16 */
/* 198 */ NdrFcShort( 0x8002 ), /* Simple arm type: FC_CHAR */
/* 200 */ NdrFcLong( 0x12 ), /* 18 */
/* 204 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 206 */ NdrFcLong( 0x13 ), /* 19 */
/* 210 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 212 */ NdrFcLong( 0x16 ), /* 22 */
/* 216 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 218 */ NdrFcLong( 0x17 ), /* 23 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 224 */ NdrFcLong( 0xe ), /* 14 */
/* 228 */ NdrFcShort( 0x2aa ), /* Offset= 682 (910) */
/* 230 */ NdrFcLong( 0x400e ), /* 16398 */
/* 234 */ NdrFcShort( 0x2b0 ), /* Offset= 688 (922) */
/* 236 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 240 */ NdrFcShort( 0x2ae ), /* Offset= 686 (926) */
/* 242 */ NdrFcLong( 0x4012 ), /* 16402 */

```

```

/* 246 */ NdrFcShort( 0x26c ), /* Offset= 620 (866) */
/* 248 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 252 */ NdrFcShort( 0x26a ), /* Offset= 618 (870) */
/* 254 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 258 */ NdrFcShort( 0x264 ), /* Offset= 612 (870) */
/* 260 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 264 */ NdrFcShort( 0x25e ), /* Offset= 606 (870) */
/* 266 */ NdrFcLong( 0x0 ), /* 0 */
/* 270 */ NdrFcShort( 0x0 ), /* Offset= 0 (270) */
/* 272 */ NdrFcLong( 0x1 ), /* 1 */
/* 276 */ NdrFcShort( 0x0 ), /* Offset= 0 (276) */
/* 278 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (277) */
/* 280 */
0x15, /* FC_STRUCT */
0x7, /* 7 */
/* 282 */ NdrFcShort( 0x8 ), /* 8 */
/* 284 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 286 */
0x12, 0x0, /* FC_UP */
/* 288 */ NdrFcShort( 0xe ), /* Offset= 14 (302) */
/* 290 */
0x1b, /* FC_CARRAY */
0x1, /* 1 */
/* 292 */ NdrFcShort( 0x2 ), /* 2 */
/* 294 */ 0x9, /* Corr desc: FC_ULONG */
0x0, /* */
/* 296 */ NdrFcShort( 0xfffc ), /* -4 */
/* 298 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 300 */ 0x6, /* FC_SHORT */
0x5b, /* FC_END */
/* 302 */
0x17, /* FC_CSTRUCT */
0x3, /* 3 */
/* 304 */ NdrFcShort( 0x8 ), /* 8 */
/* 306 */ NdrFcShort( 0xffffffff ), /* Offset= -16 (290) */
/* 308 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 310 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 312 */
0x2f, /* FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 314 */ NdrFcLong( 0x0 ), /* 0 */
/* 318 */ NdrFcShort( 0x0 ), /* 0 */
/* 320 */ NdrFcShort( 0x0 ), /* 0 */
/* 322 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 324 */ 0x0, /* 0 */
0x0, /* 0 */
/* 326 */ 0x0, /* 0 */
0x0, /* 0 */
/* 328 */ 0x0, /* 0 */
0x46, /* 70 */
/* 330 */
0x2f, /* FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 332 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 336 */ NdrFcShort( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 342 */ 0x0, /* 0 */
0x0, /* 0 */
/* 344 */ 0x0, /* 0 */
0x0, /* 0 */
/* 346 */ 0x0, /* 0 */
0x46, /* 70 */
/* 348 */
[pointer_deref] */
/* 350 */ NdrFcShort( 0x2 ), /* Offset= 2 (352) */
/* 352 */
0x12, 0x0, /* FC_UP */
/* 354 */ NdrFcShort( 0x1e6 ), /* Offset= 486 (840) */
/* 356 */
0x2a, /*
FC_ENCAPSULATED_UNION */
0x89, /* 137 */
/* 358 */ NdrFcShort( 0x20 ), /* 32 */
/* 360 */ NdrFcShort( 0xa ), /* 10 */
/* 362 */ NdrFcLong( 0x8 ), /* 8 */
/* 366 */ NdrFcShort( 0x50 ), /* Offset= 80 (446) */
/* 368 */ NdrFcLong( 0xd ), /* 13 */
/* 372 */ NdrFcShort( 0x70 ), /* Offset= 112 (484) */
/* 374 */ NdrFcLong( 0x9 ), /* 9 */
/* 378 */ NdrFcShort( 0x90 ), /* Offset= 144 (522) */
/* 380 */ NdrFcLong( 0xc ), /* 12 */
/* 384 */ NdrFcShort( 0xb0 ), /* Offset= 176 (560) */
/* 386 */ NdrFcLong( 0x24 ), /* 36 */
/* 390 */ NdrFcShort( 0x104 ), /* Offset= 260 (650) */
/* 392 */ NdrFcLong( 0x800d ), /* 32781 */
/* 396 */ NdrFcShort( 0x120 ), /* Offset= 288 (684) */
/* 398 */ NdrFcLong( 0x10 ), /* 16 */
/* 402 */ NdrFcShort( 0x13a ), /* Offset= 314 (716) */
/* 404 */ NdrFcLong( 0x2 ), /* 2 */
/* 408 */ NdrFcShort( 0x150 ), /* Offset= 336 (744) */
/* 410 */ NdrFcLong( 0x3 ), /* 3 */
/* 414 */ NdrFcShort( 0x166 ), /* Offset= 358 (772) */
/* 416 */ NdrFcLong( 0x14 ), /* 20 */
/* 420 */ NdrFcShort( 0x17c ), /* Offset= 380 (800) */
/* 422 */ NdrFcShort( 0xffffffff ), /* Offset= -1 (421) */
/* 424 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 426 */ NdrFcShort( 0x0 ), /* 0 */
/* 428 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 430 */ NdrFcShort( 0x0 ), /* 0 */
/* 432 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 434 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 438 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 440 */
0x12, 0x0, /* FC_UP */
/* 442 */ NdrFcShort( 0xffffffff74 ), /* Offset= -140 (302) */
/* 444 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 446 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 448 */ NdrFcShort( 0x10 ), /* 16 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ NdrFcShort( 0x6 ), /* Offset= 6 (458) */
/* 454 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 456 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 458 */
0x11, 0x0, /* FC_RP */
/* 460 */ NdrFcShort( 0xfffffdc ), /* Offset= -36 (424) */
/* 462 */

```

```

0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 468 */ NdrFcShort( 0x0 ), /* 0 */
/* 470 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 472 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 476 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 478 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 480 */ NdrFcShort( 0xfffff58 ), /* Offset= -168 (312) */
/* 482 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 484 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 486 */ NdrFcShort( 0x10 ), /* 16 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ NdrFcShort( 0x6 ), /* Offset= 6 (496) */
/* 492 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 494 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 496 */
0x11, 0x0, /* FC_RP */
/* 498 */ NdrFcShort( 0xfffff5dc ), /* Offset= -36 (462) */
/* 500 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 502 */ NdrFcShort( 0x0 ), /* 0 */
/* 504 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 510 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 514 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 518 */ NdrFcShort( 0xfffff44 ), /* Offset= -188 (330) */
/* 520 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 522 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 524 */ NdrFcShort( 0x10 ), /* 16 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ NdrFcShort( 0x6 ), /* Offset= 6 (534) */
/* 530 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 532 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 534 */
0x11, 0x0, /* FC_RP */
/* 536 */ NdrFcShort( 0xfffff5dc ), /* Offset= -36 (500) */
/* 538 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /* 3 */
/* 540 */ NdrFcShort( 0x0 ), /* 0 */
/* 542 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 544 */ NdrFcShort( 0x0 ), /* 0 */
/* 546 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 548 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 552 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 554 */
0x12, 0x0, /* FC_UP */
/* 556 */ NdrFcShort( 0x176 ), /* Offset= 374 (930) */
/* 558 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 560 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 562 */ NdrFcShort( 0x10 ), /* 16 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ NdrFcShort( 0x6 ), /* Offset= 6 (572) */
/* 568 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 570 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 572 */
0x11, 0x0, /* FC_RP */
/* 574 */ NdrFcShort( 0xfffff5dc ), /* Offset= -36 (538) */
/* 576 */
0x2f, /* FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 578 */ NdrFcLong( 0x2f ), /* 47 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ NdrFcShort( 0x0 ), /* 0 */
/* 586 */ 0xc0, /* 192 */
0x0, /* 0 */
/* 588 */ 0x0, /* 0 */
0x0, /* 0 */
/* 590 */ 0x0, /* 0 */
0x0, /* 0 */
/* 592 */ 0x0, /* 0 */
0x46, /* 70 */
/* 594 */
0x1b, /* FC_CARRAY */
0x0, /* 0 */
/* 596 */ NdrFcShort( 0x1 ), /* 1 */
/* 598 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 600 */ NdrFcShort( 0x4 ), /* 4 */
/* 602 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 604 */ 0x1, /* FC_BYTE */
0x5b, /* FC_END */
/* 606 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 608 */ NdrFcShort( 0x18 ), /* 24 */
/* 610 */ NdrFcShort( 0x0 ), /* 0 */
/* 612 */ NdrFcShort( 0xc ), /* Offset= 12 (624) */
/* 614 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 616 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 618 */ NdrFcShort( 0xfffff5d6 ), /* Offset= -42 (576) */
/* 620 */ 0x39, /* FC_ALIGNM8 */
0x36, /* FC_POINTER */
/* 622 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 624 */
0x12, 0x0, /* FC_UP */
/* 626 */ NdrFcShort( 0xfffff5e0 ), /* Offset= -32 (594) */
/* 628 */
0x21, /*
FC_BOGUS_ARRAY */

```



```

0x3, /* 3 */
/* 630 */ NdrFcShort( 0x0 ), /* 0 */
/* 632 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
/* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 636 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 638 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 642 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 644 */
0x12, 0x0, /* FC_UP */
/* 646 */ NdrFcShort( 0xfffffd8 ), /* Offset= -40 (606) */
/* 648 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 650 */
0x1a, /*
FC_BOGUS_STRUCT */
/* 652 */ NdrFcShort( 0x10 ), /* 16 */
/* 654 */ NdrFcShort( 0x0 ), /* 0 */
/* 656 */ NdrFcShort( 0x6 ), /* Offset= 6 (662) */
/* 658 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 660 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 662 */
0x11, 0x0, /* FC_RP */
/* 664 */ NdrFcShort( 0xfffffdc ), /* Offset= -36 (628) */
/* 666 */
0x1d, /* FC_SMFARRAY */
0x0, /* 0 */
/* 668 */ NdrFcShort( 0x8 ), /* 8 */
/* 670 */ 0x2, /* FC_CHAR */
0x5b, /* FC_END */
/* 672 */
0x15, /* FC_STRUCT */
0x3, /* 3 */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ 0x8, /* FC_LONG */
0x6, /* FC_SHORT */
/* 678 */ 0x6, /* FC_SHORT */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 680 */ 0x0, /* 0 */
NdrFcShort( 0xfffff1 ), /* Offset=
-15 (666) */
0x5b, /* FC_END */
/* 684 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 686 */ NdrFcShort( 0x20 ), /* 32 */
/* 688 */ NdrFcShort( 0x0 ), /* 0 */
/* 690 */ NdrFcShort( 0xa ), /* Offset= 10 (700) */
/* 692 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 694 */ 0x36, /* FC_POINTER */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 696 */ 0x0, /* 0 */
NdrFcShort( 0xfffff7 ), /* Offset=
-25 (672) */
0x5b, /* FC_END */
/* 700 */
0x11, 0x0, /* FC_RP */
/* 702 */ NdrFcShort( 0xfffff10 ), /* Offset= -240 (462) */
/* 704 */
0x1b, /* FC_CARRAY */
0x0, /* 0 */
/* 706 */ NdrFcShort( 0x1 ), /* 1 */
/* 708 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 714 */ 0x1, /* FC_BYTE */
0x5b, /* FC_END */
/* 716 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 718 */ NdrFcShort( 0x10 ), /* 16 */
/* 720 */ NdrFcShort( 0x0 ), /* 0 */
/* 722 */ NdrFcShort( 0x6 ), /* Offset= 6 (728) */
/* 724 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 726 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 728 */
0x12, 0x0, /* FC_UP */
/* 730 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (704) */
/* 732 */
0x1b, /* FC_CARRAY */
0x1, /* 1 */
/* 734 */ NdrFcShort( 0x2 ), /* 2 */
/* 736 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
/* 738 */ NdrFcShort( 0x0 ), /* 0 */
/* 740 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 742 */ 0x6, /* FC_SHORT */
0x5b, /* FC_END */
/* 744 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 746 */ NdrFcShort( 0x10 ), /* 16 */
/* 748 */ NdrFcShort( 0x0 ), /* 0 */
/* 750 */ NdrFcShort( 0x6 ), /* Offset= 6 (756) */
/* 752 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 754 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 756 */
0x12, 0x0, /* FC_UP */
/* 758 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (732) */
/* 760 */
0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 762 */ NdrFcShort( 0x4 ), /* 4 */
/* 764 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
/* 766 */ NdrFcShort( 0x0 ), /* 0 */
/* 768 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 770 */ 0x8, /* FC_LONG */
0x5b, /* FC_END */
/* 772 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 774 */ NdrFcShort( 0x10 ), /* 16 */
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ NdrFcShort( 0x6 ), /* Offset= 6 (784) */
/* 780 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 782 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 784 */
0x12, 0x0, /* FC_UP */

```

```

/* 786 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (760) */
/* 788 */
0x1b, /* FC_CARRAY */
0x7, /* 7 */
/* 790 */ NdrFcShort( 0x8 ), /* 8 */
/* 792 */ 0x19, /* Corr desc: field pointer, FC_ULONG */
0x0, /* */
/* 794 */ NdrFcShort( 0x0 ), /* 0 */
/* 796 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 798 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 800 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 802 */ NdrFcShort( 0x10 ), /* 16 */
/* 804 */ NdrFcShort( 0x0 ), /* 0 */
/* 806 */ NdrFcShort( 0x6 ), /* Offset= 6 (812) */
/* 808 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 810 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 812 */
0x12, 0x0, /* FC_UP */
/* 814 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (788) */
/* 816 */
0x15, /* FC_STRUCT */
0x3, /* 3 */
/* 818 */ NdrFcShort( 0x8 ), /* 8 */
/* 820 */ 0x8, /* FC_LONG */
0x8, /* FC_LONG */
/* 822 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 824 */
0x1b, /* FC_CARRAY */
0x3, /* 3 */
/* 826 */ NdrFcShort( 0x8 ), /* 8 */
/* 828 */ 0x7, /* Corr desc: FC_USHORT */
0x0, /* */
/* 830 */ NdrFcShort( 0xffc8 ), /* -56 */
/* 832 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 834 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /* 0 */
/* 836 */ NdrFcShort( 0xfffffec ), /* Offset= -20 (816) */
/* 838 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 840 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 842 */ NdrFcShort( 0x38 ), /* 56 */
/* 844 */ NdrFcShort( 0xfffffec ), /* Offset= -20 (824) */
/* 846 */ NdrFcShort( 0x0 ), /* Offset= 0 (846) */
/* 848 */ 0x6, /* FC_SHORT */
0x6, /* FC_SHORT */
/* 850 */ 0x38, /* FC_ALIGNM4 */
0x8, /* FC_LONG */
/* 852 */ 0x8, /* FC_LONG */
0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 854 */ 0x4, /* 4 */
NdrFcShort( 0xffffe0d ), /* Offset=
-499 (356) */
0x5b, /* FC_END */
/* 858 */
0x12, 0x0, /* FC_UP */
/* 860 */ NdrFcShort( 0xfffff02 ), /* Offset= -254 (606) */
/* 862 */
0x1, /* FC_UP [simple_pointer] */
/* FC_BYTE */
0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_SHORT */
0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_LONG */
0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_FLOAT */
0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_DOUBLE */
0x5c, /* FC_PAD */
0x12, 0x0, /* FC_UP */
/* 884 */ NdrFcShort( 0xffffda4 ), /* Offset= -604 (280) */
/* 886 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 888 */ NdrFcShort( 0xffffda6 ), /* Offset= -602 (286) */
/* 890 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 892 */ NdrFcShort( 0xffffdbc ), /* Offset= -580 (312) */
/* 894 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 896 */ NdrFcShort( 0xffffdca ), /* Offset= -566 (330) */
/* 898 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 900 */ NdrFcShort( 0xffffdd8 ), /* Offset= -552 (348) */
/* 902 */
0x12, 0x10, /* FC_UP
[pointer_deref] */
/* 904 */ NdrFcShort( 0x2 ), /* Offset= 2 (906) */
/* 906 */
0x12, 0x0, /* FC_UP */
/* 908 */ NdrFcShort( 0x16 ), /* Offset= 22 (930) */
/* 910 */
0x15, /* FC_STRUCT */
0x7, /* 7 */
/* 912 */ NdrFcShort( 0x10 ), /* 16 */
/* 914 */ 0x6, /* FC_SHORT */
0x1, /* FC_BYTE */
/* 916 */ 0x1, /* FC_BYTE */
0x38, /* FC_ALIGNM4 */
/* 918 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 920 */ 0xb, /* FC_HYPER */
0x5b, /* FC_END */
/* 922 */
0x12, 0x0, /* FC_UP */
/* 924 */ NdrFcShort( 0xfffff2 ), /* Offset= -14 (910) */
/* 926 */
0x12, 0x8, /* FC_UP [simple_pointer] */
/* FC_CHAR */
0x5c, /* FC_PAD */
0x1a, /*
FC_BOGUS_STRUCT */
0x7, /* 7 */

```

```

/* 932 */ NdrFcShort( 0x20 ), /* 32 */
/* 934 */ NdrFcShort( 0x0 ), /* 0 */
/* 936 */ NdrFcShort( 0x0 ), /* Offset= 0 (936) */
/* 938 */ 0x8, /* FC_LONG */
/* 940 */ 0x6, /* FC_SHORT */
/* 942 */ 0x6, /* FC_SHORT */
/* 944 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
/* 946 */ NdrFcShort( 0xffffc54 ), /* Offset= -940 (6) */
/* 948 */ 0x5c, /* FC_PAD */
/* 950 */ 0xb4, /* FC_USER_MARSHAL */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x18 ), /* 24 */
/* 956 */ NdrFcShort( 0x0 ), /* 0 */
/* 958 */ NdrFcShort( 0xffffc44 ), /* Offset= -956 (2) */
/* 960 */
/* 962 */ NdrFcShort( 0x6 ), /* Offset= 6 (968) */
/* 964 */
/* 966 */ NdrFcShort( 0xfffffdc ), /* Offset= -36 (930) */
/* 968 */ 0xb4, /* FC_USER_MARSHAL */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x18 ), /* 24 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffff4 ), /* Offset= -12 (964) */

0x0
}
};

const CInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
( CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
0
};

const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
( CInterfaceStubVtbl *) &_ITPCCStubVtbl,
0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
"ITPCC",
0
};

#define _tpcc_com_ps_CHECK_IID(n) IID_GENERIC_CHECK_IID(
_tpcc_com_ps, pIID, n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
if(!_tpcc_com_ps_CHECK_IID(0))
{
*pIndex = 0;
return 1;
}
}

```

```

return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
(PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
(PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
(const PCInterfaceName *) &_tpcc_com_ps_InterfaceNamesList,
0, // no delegation
&_tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uuid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0 /* Filler3 */
};

#endif /* defined(_M_IA64) || defined(_M_AXP64) */

```

tpcc_dblib.cpp

```

/* FILE: TPCC_DBLIB.CPP
* Microsoft TPC-C Kit Ver.
4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
* Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
* PURPOSE: Implements dblib calls for TPC-C txns.
* Contact: Charles Levine (clevine@microsoft.com)
*
* Change history:
* 4.20.000 - updated rev number to match kit
* 4.10.001 - not deleting error class in catch handler on
deadlock retry;
* not a functional bug, but a
memory leak
* - had to tweak some declarations
to compile with latest SDK; no functional change
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqlldb.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DIIDDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE 4096

```

```

// version string; must match return value from tpcc_version stored proc
const char sVersion[] = "4.10.000";

const          iMaxRetries = 10;          // how many
retries on deadlock
static long    iConnectionCount = 0; // number of current dblink
connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL WINAPI DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit();          // initialize dblink
            break;

        case DLL_PROCESS_DETACH:
            dbexit();          // close all dblink
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB          *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity, dberr, oserr, dberrstr,
oserrstr );
    }
    return INT_CANCEL;
}

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity, char *msgtext)
*
* PURPOSE:      This function handles DB-Library SQL Server error
messages
*
* ARGUMENTS:   DBPROCESS          *dbproc
DBPROCESS id pointer
*
*              DBINT
msgno          message number
*              int
msgstate      message state
*              int
severity      message severity
*              char
*msgtext      printable message description
*

```

```

* RETURNS:      int
INT_CONTINUE   continue if error is SQLETIME else INT_CANCEL
action
*
INT_CANCEL     cancel operation
*
* COMMENTS:    This function also sets the dead lock dbproc variable if
necessary.
*
*/

// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS, DBINT,
INT, INT, LPCSTR, LPCSTR, LPCSTR, DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity,
LPCSTR msgtext, LPCSTR
srvname, LPCSTR procname, DBUSMALLINT line)
{
    CTPCC_DBLIB          *pConn;

    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno, msgstate, severity, msgtext
);
    }

    return 0;
}

/* FUNCTION: void UtilStrCpy(char * pDest, char * pSrc, int n)
*
* PURPOSE:      This function copies n characters from string pSrc to pDst
and places a
*
*              null character at the end of the destination
string.
*
* ARGUMENTS:   char          *pDest  destination
string pointer
*              char
*pSrc          source string pointer
*              int
n              number of characters to copy
*
* RETURNS:      None
*
* COMMENTS:    Unlike strncpy this function ensures that the result string
is
*
*              always null terminated.
*
*/

inline static void UtilStrCpy(char * pDest, const BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*
*
*/

char* CTPCC_DBLIB_ERR::ErrorText(void)

```

```

{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRIED_TRANS,
        "Retries before transaction succeeded." },
        { 0,
        "" }
    };

    static char szNotFound[] = "Unknown error number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_erno == errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer,          // name of SQL server
    LPCSTR szUser,           // user name for login
    LPCSTR szPassword,       // password for login
    LPCSTR szHost,           // workstation name;
    LPCSTR szDatabase )      // name of database to use
shows up in sp_who; max 30 chars, only first 10 kept by SQL Server
{
    return new CTPCC_DBLIB( szServer, szUser, szPassword, szHost,
szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer,          // name of SQL server
    LPCSTR szUser,           // user name for login
    LPCSTR szPassword,       // password for login
    LPCSTR szHost,           // workstation name;
    LPCSTR szDatabase )      // name of database to use
shows up in sp_who; max 30 chars, only first 10 kept by SQL Server
{
    LOGINREC *login;
    const BYTE *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

    m_MaxRetries = 10;          // how many retries on deadlock

    // increase max number of connections if getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5) )
    {
        if ( dbsetmaxprocs(iConnectionCount+10) == FAIL )
            ThrowError(CDBLIBERR::eDbSetMaxProcs);
        }

        // allocate a login structure
        login = dblogin();
        if (login == NULL)
            ThrowError(CDBLIBERR::eLogin);
        InterlockedIncrement( &iConnectionCount );

        // register error and message handler functions
        if (dbprocerrhandle(login, err_handler) == NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        if (dbprocmsghandle(login, msg_handler) == NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        DBSETLUSER(login, szUser);
        DBSETLPWD(login, szPassword);
        DBSETLHOST(login, szHost);
        DBSETLPACKET(login, (unsigned short)DEFCLPCKSIZE);
        DBSETLVERSION(login, DBVER60);          // use dblib
        ver 6.0 client behavior

        // set time to wait for login
        if (dbsetlogintime(60) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        // set time to wait for statement execution
        if (dbsettime(180) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        m_dbproc = dbopen(login, szServer);

        // deallocate login structure before checking for success
        dbfreelogin( login );

        if (m_dbproc == NULL)
            ThrowError(CDBLIBERR::eDbOpen);

        // save address of class instance so that the message and error
        handler
        // can get to data.
        dbsetuserdata(m_dbproc, (LPVOID)this);

        // Use the the right database
        if (dbuse(m_dbproc, szDatabase) == FAIL)
            ThrowError(CDBLIBERR::eDbUse);

        dbcmd(m_dbproc, "set nocount on ");          //
        // do not return row counts
        dbcmd(m_dbproc, "set XACT_ABORT ON");          //
        // rollback transaction on abort

        if (dbsqlexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbSqlExec);

        DiscardNextResults(2);

        // verify that version of stored procs on server is correct
        dbrpcinit(m_dbproc, "tpcc_version", 0);

        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc) != SUCCEED)

```

```

        ThrowError(CDBLIBERR::eDbResults);

    if (dbnextrow(m_dbproc) != REG_ROW)
        ThrowError(CDBLIBERR::eDbNextRow);

    char szSrvVersion[16];
    pData=dbdata(m_dbproc, 1);
    if (pData)
        UtilStrCpy(szSrvVersion, pData, dbdatlen(m_dbproc,
1));
    else
        szSrvVersion[0]=0;
    if (strcmp(szSrvVersion,sVersion))
        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

    DiscardNextRows(0);
    DiscardNextResults(0);
}

CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int dberr, int oserr, LPCSTR
dberrstr, LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new CDBLIBERR(CDBLIBERR::eUnknown,
severity, dberr, oserr);

    if (dberrstr != NULL)
    {
        m_DbLibErr->m_dberrstr = new char[ strlen(dberrstr)+1
];
        strcpy( m_DbLibErr->m_dberrstr, dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new char[ strlen(oserrstr)+1
];
        strcpy( m_DbLibErr->m_oserrstr, oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno, int msgstate, int
severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)

```

```

    {
        m_SqlErr->m_msgtext = new char[ strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext, msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if yes, throw it and ignore any
DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLERR *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our pointer to instance;
        catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to happen, since it means that an
error was returned
        pDbLibErr = new CDBLIBERR(eAction);
    else
    {
        pDbLibErr = m_DbLibErr;
        pDbLibErr->m_eAction = eAction;
        m_DbLibErr = NULL; // clear our
        pointer to instance; catch handler will delete
    }

    throw pDbLibErr;
}

// Read and discard rows until no more. Throw an exception if number of rows
read doesn't
// match number of rows expected. The row count will be ignored if the
expected count value
// passed in is negative. A typical use of this routine is to verify that there are
no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int iRowsRead = 0;
    RETCODE rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >= 0)

                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }
}

```

```

        if ((iExpectedCount >= 0) &&
            (iExpectedCount != iRowsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

    // Read and discard results until no more. Throw an exception if number of
    // result sets read doesn't
    // match number expected. The result set count will be ignored if the expected
    // count value
    // passed in is negative. A typical use of this routine is to verify that there are
    // no more
    // result sets to be read.
    void CTPCC_DBLIB::DiscardNextResults(int iExpectedCount)
    {
        int                iResultsRead = 0;
        RETCODE           rc;

        while (TRUE)
        {
            rc = dbresults(m_dbproc);
            if (rc == NO_MORE_RESULTS)
                break;
            if (rc == FAIL)
            {
                if (iExpectedCount >= 0)

                    ThrowError(CDBLIBERR::eDbResults);
                else
                    break;
            }

            DiscardNextRows(-1);
            iResultsRead++;
        }

        if ((iExpectedCount >= 0) &&
            (iExpectedCount != iResultsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

    void CTPCC_DBLIB::StockLevel()
    {
        int                iTryCount = 0;
        const BYTE        *pData;

        ResetError();

        while (TRUE)
        {
            try
            {
                dbrpcinit(m_dbproc, "tpcc_stocklevel", 0);

                dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
                    -1, -1, (BYTE *) &m_txn.StockLevel.w_id); // @w_id smallint
                dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
                    -1, -1, (BYTE *) &m_txn.StockLevel.d_id); // @d_id tinyint
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
                    -1, -1, (BYTE *) &m_txn.StockLevel.threshold); // @threshold smallint

                if (dbrpcexec(m_dbproc) == FAIL)

                    ThrowError(CDBLIBERR::eDbRpcExec);

                if (dbresults(m_dbproc) != SUCCEEDED)

                    ThrowError(CDBLIBERR::eDbResults);
            }
        }
    }

```

```

        if (dbnextrow(m_dbproc) != REG_ROW)

            ThrowError(CDBLIBERR::eDbNextRow);

        if (pData=dbdata(m_dbproc, 1))
            m_txn.StockLevel.low_stock =

                *((long *) pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        m_txn.StockLevel.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
            (e->m_msgno ==

                iErrOleDbProvider &&
                sErrTimeoutExpired) != NULL)) &&
            (e->m_msgtext,
                (++iTryCount <= iMaxRetries))
            {
                // hit deadlock; backoff for
                // increasingly longer period

                delete e;
                Sleep(10 * iTryCount);
            }
            else
                throw;
        }
    } // while (TRUE)

    //if (iTryCount)
    //    throw new
    CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
        iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                i;
    DBINT             commit_flag;
    DBDATE TIME       datetime;
    DBDATE REC        daterec;

    int                iTryCount = 0;
    const BYTE        *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_neworder", 0);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
                -1, -1, (BYTE *) &m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
                -1, -1, (BYTE *) &m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4,
                -1, -1, (BYTE *) &m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
                -1, -1, (BYTE *) &m_txn.NewOrder.o_ol_cnt);
        }
    }
}

```

```

// check whether any order lines are for a
remote warehouse
    m_txn.NewOrder.o_all_local = 1;
    for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
    {
        if
(m_txn.NewOrder.OL[i].ol_supply_w_id != m_txn.NewOrder.w_id)
        {
            m_txn.NewOrder.o_all_local = 0; // at least one remote warehouse
            break;
        }
    }
    dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.NewOrder.o_all_local);

    for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
    {
        dbrpcparam(m_dbproc, NULL, 0,
SQLINT4, -1, -1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);
        dbrpcparam(m_dbproc, NULL, 0,
SQLINT2, -1, -1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);
        dbrpcparam(m_dbproc, NULL, 0,
SQLINT2, -1, -1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
    }

    if (dbrpcexec(m_dbproc) == FAIL)

ThrowError(CDBLIBERR::eDbRpcExec);

// Get order line results
m_txn.NewOrder.total_amount = 0;

    for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
    {
        if (dbresults(m_dbproc) !=
SUCCEED)

ThrowError(CDBLIBERR::eDbResults);

        if (dbnumcols(m_dbproc) != 5)

ThrowError(CDBLIBERR::eWrongNumCols);

        if (dbnextrow(m_dbproc) !=
REG_ROW)

ThrowError(CDBLIBERR::eDbNextRow);

        if (pData=dbdata(m_dbproc, 1))

UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name, pData, dbdatlen(m_dbproc, 1));
        if (pData=dbdata(m_dbproc, 2))

m_txn.NewOrder.OL[i].ol_stock = (*(DBSMALLINT *) pData);
        if (pData=dbdata(m_dbproc, 3))

UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_generic, pData,
dbdatlen(m_dbproc, 3));
        if (pData=dbdata(m_dbproc, 4))
            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);
        if (pData=dbdata(m_dbproc, 5))

```

```

            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

            m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount + m_txn.NewOrder.OL[i].ol_amount;

            DiscardNextRows(0);
        }

// get remaining values for w_tax, d_tax, o_id,
c_last, c_discount, c_credit, o_entry_d, commit_flag
        if (dbresults(m_dbproc) != SUCCEED)

ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)

ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc) != 8)

ThrowError(CDBLIBERR::eWrongNumCols);

        if (pData=dbdata(m_dbproc, 1))

            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);
            if (pData=dbdata(m_dbproc, 2))

            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);
            if (pData=dbdata(m_dbproc, 3))
                m_txn.NewOrder.o_id =
(*(DBINT *) pData);
            if (pData=dbdata(m_dbproc, 4))

UtilStrCpy(m_txn.NewOrder.c_last, pData, dbdatlen(m_dbproc, 4));
            if (pData=dbdata(m_dbproc, 5))
                dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
            if (pData=dbdata(m_dbproc, 6))

UtilStrCpy(m_txn.NewOrder.c_credit, pData, dbdatlen(m_dbproc, 6));
            if (pData=dbdata(m_dbproc, 7))
            {
                datetime = *((DBDATETIME *)
pData);
                dbdatecrack(m_dbproc, &daterec,
&datetime);
                m_txn.NewOrder.o_entry_d.year
= daterec.year;
                m_txn.NewOrder.o_entry_d.month
= daterec.month;
                m_txn.NewOrder.o_entry_d.day
= daterec.day;
                m_txn.NewOrder.o_entry_d.hour
= daterec.hour;
                m_txn.NewOrder.o_entry_d.minute = daterec.minute;
                m_txn.NewOrder.o_entry_d.second = daterec.second;

```



```

    }
    if (pData=dbdata(m_dbproc, 8))
        commit_flag = *(DBTINYINT *)
pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (commit_flag == 1)
        {
            m_txn.NewOrder.total_amount *=
((1 + m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

m_txn.NewOrder.exec_status_code = eOK;
        }
        else

m_txn.NewOrder.exec_status_code = eInvalidItem;

            return;
        }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno == 1205 ||
(e->m_msgno ==
iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)) &&
                strstr(e->m_msgtext,
                    (++iTryCount <= iMaxRetries))
                {
                    // hit deadlock; backoff for
                    delete e;
                    Sleep(10 * iTryCount);
                }
                else
                    throw;
            }
        } // while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME    datetime;
    DBDATEREC    daterec;

    int            iTryCount = 0;
    const BYTE    *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_payment", 0);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
-1, -1, (BYTE *) &m_txn.Payment.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLFLT8,
-1, -1, (BYTE *) &m_txn.Payment.h_amount);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.Payment.d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.Payment.c_d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4,
-1, -1, (BYTE *) &m_txn.Payment.c_id);

            // if customer id is zero, then payment is by
            name
            if (m_txn.Payment.c_id == 0)
                dbrpcparam(m_dbproc, NULL, 0,
SQLCHAR, -1, strlen(m_txn.Payment.c_last), (unsigned char
*)m_txn.Payment.c_last);

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc) != 27)
                ThrowError(CDBLIBERR::eWrongNumCols);

            if (pData=dbdata(m_dbproc, 1))
                m_txn.Payment.c_id = *((DBINT
*) pData);
            if (pData=dbdata(m_dbproc, 2))
                UtilStrCpy(m_txn.Payment.c_last,
pData, dbdatlen(m_dbproc, 2));
            if (pData=dbdata(m_dbproc, 3))
            {
                datetime = *((DBDATETIME *)
pData);
                dbdatecrack(m_dbproc, &daterec,
&datetime);
                m_txn.Payment.h_date.year =
daterec.year;
                m_txn.Payment.h_date.month =
daterec.month;
                m_txn.Payment.h_date.day =
daterec.day;
                m_txn.Payment.h_date.hour =
daterec.hour;
                m_txn.Payment.h_date.minute =
daterec.minute;
                m_txn.Payment.h_date.second =
daterec.second;
            }
            if (pData=dbdata(m_dbproc, 4))
                UtilStrCpy(m_txn.Payment.w_street_1, pData, dbdatlen(m_dbproc, 4));
            if (pData=dbdata(m_dbproc, 5))
                UtilStrCpy(m_txn.Payment.w_street_2, pData, dbdatlen(m_dbproc, 5));
            if (pData=dbdata(m_dbproc, 6))
                UtilStrCpy(m_txn.Payment.w_city, pData, dbdatlen(m_dbproc, 6));
        }
    }
}

```

```

        if (pData=dbdata(m_dbproc, 7))
UtilStrCpy(m_txn.Payment.w_state, pData, dbdatlen(m_dbproc, 7));
        if (pData=dbdata(m_dbproc, 8))
            UtilStrCpy(m_txn.Payment.w_zip,
pData, dbdatlen(m_dbproc, 8));
        if (pData=dbdata(m_dbproc, 9))
UtilStrCpy(m_txn.Payment.d_street_1, pData, dbdatlen(m_dbproc, 9));
        if (pData=dbdata(m_dbproc, 10))
UtilStrCpy(m_txn.Payment.d_street_2, pData, dbdatlen(m_dbproc, 10));
        if (pData=dbdata(m_dbproc, 11))
            UtilStrCpy(m_txn.Payment.d_city,
pData, dbdatlen(m_dbproc, 11));
        if (pData=dbdata(m_dbproc, 12))
UtilStrCpy(m_txn.Payment.d_state, pData, dbdatlen(m_dbproc, 12));
        if (pData=dbdata(m_dbproc, 13))
            UtilStrCpy(m_txn.Payment.d_zip,
pData, dbdatlen(m_dbproc, 13));
        if (pData=dbdata(m_dbproc, 14))
            UtilStrCpy(m_txn.Payment.c_first,
pData, dbdatlen(m_dbproc, 14));
        if (pData=dbdata(m_dbproc, 15))
UtilStrCpy(m_txn.Payment.c_middle, pData, dbdatlen(m_dbproc, 15));
        if (pData=dbdata(m_dbproc, 16))
UtilStrCpy(m_txn.Payment.c_street_1, pData, dbdatlen(m_dbproc, 16));
        if (pData=dbdata(m_dbproc, 17))
UtilStrCpy(m_txn.Payment.c_street_2, pData, dbdatlen(m_dbproc, 17));
        if (pData=dbdata(m_dbproc, 18))
            UtilStrCpy(m_txn.Payment.c_city,
pData, dbdatlen(m_dbproc, 18));
        if (pData=dbdata(m_dbproc, 19))
UtilStrCpy(m_txn.Payment.c_state, pData, dbdatlen(m_dbproc, 19));
        if (pData=dbdata(m_dbproc, 20))
            UtilStrCpy(m_txn.Payment.c_zip,
pData, dbdatlen(m_dbproc, 20));
        if (pData=dbdata(m_dbproc, 21))
UtilStrCpy(m_txn.Payment.c_phone, pData, dbdatlen(m_dbproc, 21));
        if (pData=dbdata(m_dbproc, 22))
        {
            datetime = *((DBDATETIME *)
pData);
            dbdatecrack(m_dbproc, &daterec,
&datetime);
            m_txn.Payment.c_since.year =
daterec.year;
            m_txn.Payment.c_since.month =
daterec.month;
            m_txn.Payment.c_since.day =
daterec.day;
            m_txn.Payment.c_since.hour =
daterec.hour;
            m_txn.Payment.c_since.minute =
daterec.minute;
            m_txn.Payment.c_since.second =
daterec.second;
        }
        if (pData=dbdata(m_dbproc, 23))
UtilStrCpy(m_txn.Payment.c_credit, pData, dbdatlen(m_dbproc, 23));
        if (pData=dbdata(m_dbproc, 24))
            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,24), SQLFLT8,
(BYTE *)&m_txn.Payment.c_credit_lim, 8);
            if (pData=dbdata(m_dbproc, 25))
                dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,25), SQLFLT8,
(BYTE *)&m_txn.Payment.c_discount, 8);
            if (pData=dbdata(m_dbproc, 26))
                dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,26), SQLFLT8,
(BYTE *)&m_txn.Payment.c_balance, 8);
            if (pData=dbdata(m_dbproc, 27))
                UtilStrCpy(m_txn.Payment.c_data,
pData, dbdatlen(m_dbproc, 27));
                DiscardNextRows(0);
                DiscardNextResults(0);
                if (m_txn.Payment.c_id == 0)
                    throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
                else
                    m_txn.Payment.exec_status_code
= eOK;
                return;
            }
            catch (CSQLERR *e)
            {
                if ((e->m_msgno == 1205 ||
(e->m_msgno ==
iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)) &&
                    strstr(e->m_msgtext,
(++iTryCount <= iMaxRetries))
                    {
                        // hit deadlock; backoff for
                        increasingly longer period
                        delete e;
                        Sleep(10 * iTryCount);
                    }
                else
                    throw;
            }
        } // while (TRUE)
        // if (iTryCount)
        // throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
    }
void CTPCC_DBLIB::OrderStatus()
{
    int i;
    DBDATETIME datetime;
    DBDATEREC daterec;
    int iTryCount = 0;
    RETCODE rc;
    const BYTE *pData;
    ResetError();
    while (TRUE)

```

```

{
    try
    {
        dbrpcinit(m_dbproc, "tpcc_orderstatus", 0);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
-1, -1, (BYTE *) &m_txn.OrderStatus.w_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.OrderStatus.d_id);
        dbrpcparam(m_dbproc, NULL, 0, SQLINT4,
-1, -1, (BYTE *) &m_txn.OrderStatus.c_id);

        // if customer id is zero, then order status is by
name
        if (m_txn.OrderStatus.c_id == 0)
            dbrpcparam(m_dbproc, NULL, 0,
SQLCHAR, -1, strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);

        if (dbrpcexec(m_dbproc) == FAIL)
ThrowError(CDBLIBERR::eDbRpcExec);

        // Get order lines
        if (dbresults(m_dbproc) != SUCCEED)
        {
            if ((m_DbLibErr == NULL) &&
(m_SqlErr == NULL))
                throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
            else
ThrowError(CDBLIBERR::eDbResults);
        }

        if (dbnumcols(m_dbproc) != 5)
ThrowError(CDBLIBERR::eWrongNumCols);

        i = 0;
        while (TRUE)
        {
            rc = dbnextrow(m_dbproc);
            if (rc == NO_MORE_ROWS)
                break;
            if (rc != REG_ROW)

ThrowError(CDBLIBERR::eDbNextRow);

            if(pData=dbdata(m_dbproc, 1))

m_txn.OrderStatus.OL[i].ol_supply_w_id = (*(DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc, 2))

m_txn.OrderStatus.OL[i].ol_i_id = (*(DBINT *) pData);
            if(pData=dbdata(m_dbproc, 3))

m_txn.OrderStatus.OL[i].ol_quantity = (*(DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc, 4))
                dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE *)&m_txn.OrderStatus.OL[i].ol_amount, 8);
            if(pData=dbdata(m_dbproc, 5))
            {
                datetime =
*(DBDATETIME *) pData);
                dbdatecrack(m_dbproc,
&daterec, &datetime);
                m_txn.OrderStatus.OL[i].ol_delivery_d.year = daterec.year;
                m_txn.OrderStatus.OL[i].ol_delivery_d.month = daterec.month;
                m_txn.OrderStatus.OL[i].ol_delivery_d.day = daterec.day;
                m_txn.OrderStatus.OL[i].ol_delivery_d.hour = daterec.hour;
                m_txn.OrderStatus.OL[i].ol_delivery_d.minute = daterec.minute;
                m_txn.OrderStatus.OL[i].ol_delivery_d.second = daterec.second;
            }
            i++;
        }
        m_txn.OrderStatus.o_ol_cnt = i;

        if (dbresults(m_dbproc) != SUCCEED)
ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc) != 8)
ThrowError(CDBLIBERR::eWrongNumCols);

        if(pData=dbdata(m_dbproc, 1))
            m_txn.OrderStatus.c_id =
(*(DBINT *) pData);
        if(pData=dbdata(m_dbproc, 2))
UtilStrCpy(m_txn.OrderStatus.c_last, pData, dbdatlen(m_dbproc,2));
        if(pData=dbdata(m_dbproc, 3))
UtilStrCpy(m_txn.OrderStatus.c_first, pData, dbdatlen(m_dbproc,3));
        if(pData=dbdata(m_dbproc, 4))
UtilStrCpy(m_txn.OrderStatus.c_middle, pData, dbdatlen(m_dbproc, 4));

        if(pData=dbdata(m_dbproc, 5))
        {
            datetime = (*(DBDATETIME *)
                dbdatecrack(m_dbproc, &daterec,
                    m_txn.OrderStatus.o_entry_d.year
                    = daterec.year;
                    m_txn.OrderStatus.o_entry_d.month = daterec.month;
                    m_txn.OrderStatus.o_entry_d.day
                    = daterec.day;
                    m_txn.OrderStatus.o_entry_d.hour
                    = daterec.hour;
                    m_txn.OrderStatus.o_entry_d.minute = daterec.minute;
                    m_txn.OrderStatus.o_entry_d.second = daterec.second;
                }
            if(pData=dbdata(m_dbproc, 6))

                m_txn.OrderStatus.o_carrier_id =
(*(DBSMALLINT *) pData);

```

```

        if(pData=dbdata(m_dbproc, 7))
            dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,7),
            SQLFLT8,
            (BYTE *)&m_txn.OrderStatus.c_balance, 8);
        if(pData=dbdata(m_dbproc, 8))
            m_txn.OrderStatus.o_id =
            *(DBINT *) pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (m_txn.OrderStatus.o_ol_cnt == 0)
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
        else if (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else
            m_txn.OrderStatus.exec_status_code = eOK;

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
e->m_msgno ==
iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)) &&
        {
            // hit deadlock; backoff for
            increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
        else
            throw;
    }
} // while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int i;
    int iTryCount = 0;
    const BYTE *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_delivery", 0);

            dbrpcparam(m_dbproc, NULL, 0, SQLINT2,
-1, -1, (BYTE *)&m_txn.Delivery.w_id);

```

```

            dbrpcparam(m_dbproc, NULL, 0, SQLINT1,
-1, -1, (BYTE *) &m_txn.Delivery.o_carrier_id);

            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc) != SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc) != 10)
                ThrowError(CDBLIBERR::eWrongNumCols);

            for (i=0; i<10; i++)
            {
                if (pData = dbdata(m_dbproc, i+1))
                    m_txn.Delivery.o_id[i]
                    = *((DBINT *)pData);
            }

            DiscardNextRows(0);
            DiscardNextResults(0);

            m_txn.Delivery.exec_status_code = eOK;
            return;
        }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno == 1205 ||
e->m_msgno ==
iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)) &&
            {
                // hit deadlock; backoff for
                increasingly longer period
                delete e;
                Sleep(10 * iTryCount);
            }
            else
                throw;
        }
    } // while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;

```

```

        m_SqlErr = (CSQLERR*)NULL;
    }
    return;
}

tpcc_dblib.h

/* FILE:          TPCC_DBLIB.H
 *                Microsoft TPC-C Kit Ver.
4.20.000
 *                Copyright Microsoft, 1999
 *                All Rights Reserved
 *
 *                Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 * PURPOSE:       Header file for TPC-C txn class
implementation.
 *
 * Change history:
 *                4.20.000 - updated rev number to match kit
 */
#pragma once

#ifndef PDBPROCESS
#define DBPROCESS void // dbprocess structure type
typedef DBPROCESS * PDBPROCESS;
#endif

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CSQLERR : public CBaseErr
{
public:
    CSQLERR(void)
    {
        m_msgno = 0;
        m_msgstate = 0;
        m_severity = 0;
        m_msgtext = NULL;
    };
    ~CSQLERR()
    {
        delete [] m_msgtext;
    };

    int m_msgno;
    int m_msgstate;
    int m_severity;
    char *m_msgtext;

    int ErrorType() {return ERR_TYPE_SQL;};
    int ErrorNum() {return m_msgno;};
    char *ErrorText() {return m_msgtext;};
};

class CDBLIBERR : public CBaseErr
{
public:
    enum ACTION

```

```

    {
        eNone,
        eUnknown,
        eLogin, //
        error from dblogin
        eDbOpen, // error from
        dbopen
        eDbUse, //
        error from dbuse
        eDbSqlExec, //
        error from dbsqlexec
        eDbSet, //
        error from one of the dbset* routines
        eDbNextRow, //
        error from dbnextrow
        eWrongRowCount, // more or
        less rows returned than expected
        eWrongNumCols, // more or
        less columns returned than expected
        eDbResults, //
        error from dbresults
        eDbRpcExec, //
        error from dbrpcexec
        eDbSetMaxProcs, // error from
        dbsetmaxprocs
        eDbProcHandler // error from
        either dbprocerrhandle or dbprocmsgshandle
    };

    CDBLIBERR(ACTION eAction, int severity = 0, int
    dberror = 0, int oserr = 0)
    {
        m_eAction = eAction;
        m_severity = severity;
        m_dberror = dberror;
        m_oserr = oserr;

        m_dberrstr = NULL;
        m_oserrstr = NULL;
    };

    ~CDBLIBERR()
    {
        delete [] m_dberrstr;
        delete [] m_oserrstr;
    };

    ACTION m_eAction;
    int m_severity;
    int m_dberror;
    int m_oserr;
    char *m_dberrstr;
    char *m_oserrstr;

    int ErrorType() {return ERR_TYPE_DBLIB;};
    int ErrorNum() {return m_dberror;};
    char *ErrorText() {return m_dberrstr;};
};

class CTPCC_DBLIB_ERR : public CBaseErr
{
public:
    enum CTPCC_DBLIB_ERRS
    {
        ERR_WRONG_SP_VERSION = 1, //
        "Wrong version of stored procs on database server"
    };
};

```

```

ERR_INVALID_CUST,
// "Invalid Customer id,name."
ERR_NO_SUCH_ORDER,
// "No orders found for customer."
ERR_RETRIED_TRANS,
// "Retries before transaction succeeded."
};

CTPCC_DBLIB_ERR( int iErr ) { m_erno = iErr;
m_iTryCount = 0; };

CTPCC_DBLIB_ERR( int iErr, int iTryCount ) {
m_erno = iErr; m_iTryCount = iTryCount; };

int m_erno;
int m_iTryCount;

int ErrorType() {return ERR_TYPE_TPCC_DBLIB;};
int ErrorNum() {return m_erno;};

char *ErrorText();
};

class DllDecl CTPCC_DBLIB : public CTPCC_BASE
{
private:
// declare variables and private functions here...
PDBPROCESS m_dbproc;
CDBLIBERR *m_DbLibErr;
not allocated until needed (maybe never)
CSQLERR *m_SqlErr;
// not allocated until needed (maybe never)
int m_MaxRetries;
// retry count on deadlock

void DiscardNextRows(int iExpectedCount);
void DiscardNextResults(int iExpectedCount);
void ThrowError( CDBLIBERR::ACTION eAction );
void ResetError();

union
{
NEW_ORDER_DATA
NewOrder;
PAYMENT_DATA Payment;
DELIVERY_DATA Delivery;
STOCK_LEVEL_DATA StockLevel;
ORDER_STATUS_DATA OrderStatus;
} m_txn;

public:
CTPCC_DBLIB(LPCSTR szServer, LPCSTR szUser,
LPCSTR szPassword, LPCSTR szHost, LPCSTR szDatabase );
~CTPCC_DBLIB(void);

inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return &m_txn.NewOrder; };
inline PPAYMENT_DATA
BuffAddr_Payment() { return &m_txn.Payment; };
inline PDELIVERY_DATA
BuffAddr_Delivery() { return &m_txn.Delivery; };
inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
{ return &m_txn.StockLevel; };
inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return &m_txn.OrderStatus; };

void NewOrder ();
void Payment ();

```

```

void Delivery ();
void StockLevel ();
void OrderStatus ();

// these are public because they must be called from the
dblib err_handler and msg_handler
// outside of the class
void SetDbLibError(int severity, int dberr, int oserr,
LPCSTR dberrstr, LPCSTR oserrstr);
void SetSqlError( int msgno, int msgstate, int severity,
LPCSTR msgtext );
};

extern "C" DllDecl CTPCC_DBLIB* CTPCC_DBLIB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword,
LPCSTR szHost, LPCSTR szDatabase );

typedef CTPCC_DBLIB* (TYPE_CTPCC_DBLIB)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR);

tpcc_enc.cpp

// tpcc_enc.cpp: implementation of the CTPCC_ENCINA class.
//
//
//
#include <windows.h>
#include <process.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h" //tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_enc.h"
#include "..\include\tpcc_type.h"
#include "mon_client.h"
#include "client_utils.h"

static CRITICAL_SECTION TpCriticalSection;
extern "C" char *errFile;

BOOL WINAPIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call,
LPVOID lpReserved)
{
switch( ul_reason_for_call )
{
case DLL_PROCESS_ATTACH:

```

```

        DisableThreadLibraryCalls(hModule);
        InitializeCriticalSection(&TpCriticalSection);
        break;

    case DLL_PROCESS_DETACH:
        DeleteCriticalSection(&TpCriticalSection);
        break;

    default:
        /* nothing */;
    }
    return TRUE;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ENCINA* CTPCC_ENCINA_new()
{
    return new CTPCC_ENCINA();
}

// wrapper routine for enroll_client
__declspec(dllexport) CTPCC_ENCINA* CTPCC_ENCINA_post_init()
{
    enroll_client();
    return NULL;
}

// constructor and destructor
CTPCC_ENCINA::CTPCC_ENCINA()
{
    // Add initialization of ENCINA Structures if any
    m_txn = (ENC_DATA *)malloc(sizeof(ENC_DATA));
    if (m_txn == NULL)
        throw new CENCERR(ERR_TYPE_MEMORY,
ERR_FATAL_LEVEL);
}

CTPCC_ENCINA::~CTPCC_ENCINA()
{
    // free the data structure allocated with tmalloc
    free((char *)m_txn);
}

void CTPCC_ENCINA::NewOrder()
{
    // question: if we need to prepare the data?
    if (send_new_order(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_ENCINA::Payment()
{
    if (send_payment(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_ENCINA::Delivery()

```

```

{
    // Note: Delivery txn code in the tuxedo server does not implement
logging of the delivery
    // txn results, so cannot be used as is to run an auditable TPC-C
result. For that
    // reason, delivery txns should not be done via Tuxedo.
    // The code is included for completeness.
    //m_txn->u.Delivery.exec_status_code = eDeliveryFailed;
    //return;

    // Note: If we use the delivery thread in tpcc.dll, it is not possible to
get to this
    // point for delivery txns. But if we use Encina delivery server,
the code is
    // needed. It is suggested using the delivery thread in tpcc.dll
since it is
    // convenient and provides best performance.
    GetLocalTime(&m_txn->u.Delivery.queue_time);

    if (send_delivery(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        m_txn->u.Delivery.exec_status_code = eDeliveryFailed;
    else
        m_txn->u.Delivery.exec_status_code = eOK;
}

void CTPCC_ENCINA::StockLevel()
{
    if (send_stock_level(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_ENCINA::OrderStatus()
{
    if (send_order_status(sizeof(ENC_DATA), (unsigned char *)m_txn) ==
TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn->ErrorType, m_txn->error
);
}

char *CENCERR::ErrorText()
{
    if (m_iErrorType == TRPC_ERROR)
    {
        sprintf( m_szErrorText, "Error: ENCINA TRPC error
(see log file %s for details)", errFile);
    }
    else
        sprintf( m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
    return m_szErrorText;
};

tpcc_enc.h
/* FILE: TPCC_ENCINA.H

```

```

*                               Microsoft TPC-C Kit Ver.
4.10.000
*                               not yet audited
*
*   PURPOSE:                     Header file for TPC-C Encina class
implementation.
*                               Copyright Microsoft, 1999
*   All Rights Reserved
*/

#ifndef _TPCC_ENCINA_H_
#define _TPCC_ENCINA_H_

#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CTPCC_ENCINA : public CTPCC_BASE
{
private:
    struct ENC_DATA
    {
        int
        ErrorType;
        int
        error;
        union
        {
            NEW_ORDER_DATA
            PAYMENT_DATA
            DELIVERY_DATA
            STOCK_LEVEL_DATA
            ORDER_STATUS_DATA
        } u;
        *m_txn;

public:
        CTPCC_ENCINA();
        virtual ~CTPCC_ENCINA();

        inline PNEW_ORDER_DATA
        BuffAddr_NewOrder() { return &m_txn->u.NewOrder; };
        inline PPAYMENT_DATA
        BuffAddr_Payment() { return &m_txn->u.Payment; };
        inline PDELIVERY_DATA
        BuffAddr_Delivery() { return &m_txn->u.Delivery; };
        inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
        { return &m_txn->u.StockLevel; };
        inline PORDER_STATUS_DATA
        BuffAddr_OrderStatus() { return &m_txn->u.OrderStatus; };

        void NewOrder      ();
        void Payment       ();
        void Delivery       ();
        void StockLevel    ();

```

```

};

void OrderStatus      ();

class CENCERR : public CBaseErr
{
private:
    char    m_szErrorText[64];
public:
    int     m_erno; //
    int     m_iErrorType; // match
    ErrorType in CTPCC_ENCINA
    int     m_iError; // machine
    error in CTPCC_ENCINA

    // use this interface for genuine Encina errors
    CENCERR( int iErr )
    {
        m_erno = iErr; // ENCINA error
        m_iErrorType = ERR_TYPE_ENCINA;
        m_iError = 0; // only meaningful if
    }

m_erno == TPEOS
};

// use this interface to impersonate a non-Encina error
type
CENCERR( int iErrorType, int iError )
{
    m_iErrorType = iErrorType;
    m_iError = iError;
    m_erno = iError; // ???
}

// A CENCERR class can impersonate another class,
which happens if the error
// was not actually a Tuxedo error, but was simply
transmitted back via Tuxedo.
int ErrorType()
{
    return m_iErrorType;
}

int ErrorNum() {return m_erno;};
char *ErrorText();
};

// wrapper routine for class constructor:
extern "C" __declspec(dllexport) CTPCC_ENCINA* CTPCC_ENCINA_new();
extern "C" __declspec(dllexport) CTPCC_ENCINA*
CTPCC_ENCINA_post_init();

typedef CTPCC_ENCINA* (TYPE_CTPCC_ENCINA)();

#endif // !defined(_TPCC_ENCINA_H_)

tpcc_odbc.cpp

/*   FILE:                     TPCC_ODBC.CPP
*                               Microsoft TPC-C Kit Ver.
4.20.000
*                               Copyright Microsoft, 1999
*   All Rights Reserved
*
*                               Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*/

```



```

*      PURPOSE:      Implements ODBC calls for TPC-C txns.
*      Contact:    Charles Levine (clevine@microsoft.com)
*
* Change history:
*      4.20.000 - updated rev number to match kit
*      4.10.001 - not deleting error class in catch handler on
deadlock retry;
*
memory leak
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>
#include <odbss.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from tpcc_version stored proc
const char sVersion[] = "4.10.000";

const iMaxRetries = 10;          // how many retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV;
// ODBC environment handle

BOOL WINAPI DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch(ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv)
!= SQL_SUCCESS )
                return FALSE;
                break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)
                SQLFreeEnv(henv);
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

```

```

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
*/
*/
char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name."
},
        { ERR_NO_SUCH_ORDER,
"No orders
found for customer."
},
        { ERR_RETRIED_TRANS,
"Retries
before transaction succeeded."
},
        { 0,
}
};

static char szNotFound[] = "Unknown error number.";

for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_errno == errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer,          // name of SQL server
LPCSTR szUser,           // user name for login
LPCSTR szPassword,       // password for login
LPCSTR szHost,           // not used
LPCSTR szDatabase )      // name of database to use
{
    return new CTPCC_ODBC( szServer, szUser, szPassword, szHost,
szDatabase );
}

CTPCC_ODBC::CTPCC_ODBC (
LPCSTR szServer,          // name of
SQL server
LPCSTR szUser,           //
user name for login
LPCSTR szPassword,       // password
for login
LPCSTR szHost,           //
not used
LPCSTR szDatabase        // name of
database to use
)
{
    RETCODE rc;

    // initialization
    m_hdbc = SQL_NULL_HDBC;
}

```

```

m_hstmt = SQL_NULL_HSTMT;

m_hstmtNewOrder = SQL_NULL_HSTMT;
m_hstmtPayment = SQL_NULL_HSTMT;
m_hstmtDelivery = SQL_NULL_HSTMT;
m_hstmtOrderStatus = SQL_NULL_HSTMT;
m_hstmtStockLevel = SQL_NULL_HSTMT;

m_descNewOrderCols1 = SQL_NULL_HDESC;
m_descNewOrderCols2 = SQL_NULL_HDESC;
m_descOrderStatusCols1 = SQL_NULL_HDESC;
m_descOrderStatusCols2 = SQL_NULL_HDESC;

if ( SQLAllocHandle(SQL_HANDLE_DBC, henv, &m_hdbc) !=
SQL_SUCCESS )
    ThrowError(CODBCERR::eAllocHandle);

if ( SQLSetConnectOption(m_hdbc, SQL_PACKET_SIZE, 4096) !=
SQL_SUCCESS )
    ThrowError(CODBCERR::eConnOption);

{
    char                szConnectStr[256];
    char                szOutStr[1024];
    SQLSMALLINT        iOutStrLen;

    sprintf( szConnectStr, "DRIVER=SQL
Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
            szServer, szUser, szPassword, szDatabase );

    rc = SQLDriverConnect(m_hdbc, NULL,
(SQLCHAR*)szConnectStr, sizeof(szConnectStr),
(SQLCHAR*)szOutStr, sizeof(szOutStr),
&iOutStrLen, SQL_DRIVER_NOPROMPT );

    if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
        ThrowError(CODBCERR::eConnect);
}

if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmt)
!= SQL_SUCCESS)
    ThrowError(CODBCERR::eAllocHandle);

{
    char                buffer[128];

    // set some options affecting connection behavior
strcpy(buffer, "set nocount on set XACT_ABORT ON");
rc = SQLExecDirect(m_hstmt, (unsigned char *)buffer,
SQL_NTS);

    if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
        ThrowError(CODBCERR::eExecDirect);

    // verify that version of stored procs on server is correct
char db_sp_version[10];
strcpy(buffer, "{call tpcc_version}");
rc = SQLExecDirect(m_hstmt, (unsigned char *)buffer,
SQL_NTS);

    if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
        ThrowError(CODBCERR::eExecDirect);
    if ( SQLBindCol(m_hstmt, 1, SQL_C_CHAR,
&db_sp_version, sizeof(db_sp_version), NULL) != SQL_SUCCESS )
        ThrowError(CODBCERR::eBindCol);
    if ( SQLFetch(m_hstmt) == SQL_ERROR )

```

```

        ThrowError(CODBCERR::eFetch);
        if (strcmp(db_sp_version,sVersion)
            throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION );

        SQLFreeHandle(SQL_HANDLE_STMT, m_hstmt);
    }

    // Bind parameters for each of the transactions
    InitNewOrderParams();
    InitPaymentParams();
    InitOrderStatusParams();
    InitDeliveryParams();
    InitStockLevelParams();
}

CTPCC_ODBC::~CTPCC_ODBC( void )
{
    // note: descriptors are automatically released when the connection is
dropped
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtNewOrder);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtPayment);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtDelivery);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtOrderStatus);
    SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtStockLevel);

    SQLDisconnect(m_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);
}

void CTPCC_ODBC::ThrowError( CODBCERR::ACTION eAction )
{
    RETCODE                rc;
    SDWORD                INativeError;
    char                szState[6];
    char                szMsg[SQL_MAX_MESSAGE_LENGTH];
    char
szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    CODBCERR                *pODBCErr;           // not
allocated until needed (maybe never)

    pODBCErr = new CODBCERR();

    pODBCErr->m_NativeError = 0;
    pODBCErr->m_eAction = eAction;
    pODBCErr->m_bDeadLock = FALSE;

    szTmp[0] = 0;
    while (TRUE)
    {
        rc = SQLError(henv, m_hdbc, m_hstmt, (BYTE
*)&szState, &INativeError,
                                (BYTE *)&szMsg,
sizeof(szMsg), NULL);
        if (rc == SQL_NO_DATA)
            break;

        // check for deadlock
        if (INativeError == 1205 || (INativeError ==
iErrOleDbProvider &&
                                strstr(szMsg, sErrTimeoutExpired) != NULL))
            pODBCErr->m_bDeadLock = TRUE;

        // capture the (first) database error
        if (pODBCErr->m_NativeError == 0 && INativeError !=
0)
            pODBCErr->m_NativeError = INativeError;

```

```

// quit if there isn't enough room to concatenate error text
if ( (strlen(szMsg) + 2) > (sizeof(szTmp) - strlen(szTmp))
)
    break;

// include line break after first error msg
if (szTmp[0] != 0)
    strcat( szTmp, "\n");
strcat( szTmp, szMsg );
}

if (pODBCErr->m_odbcerrstr != NULL)
{
    delete [] pODBCErr->m_odbcerrstr;
    pODBCErr->m_odbcerrstr = NULL;
}

if (strlen(szTmp) > 0)
{
    pODBCErr->m_odbcerrstr = new char[ strlen(szTmp)+1
];
    strcpy( pODBCErr->m_odbcerrstr, szTmp );
}

SQLFreeStmt(m_hstmt, SQL_CLOSE);
throw pODBCErr;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.StockLevel.w_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS )
        ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE          rc;
    int              iTryCount = 0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)"L"{call tpcc_stocklevel(?,?,?)}", SQL_NTS);

```

```

if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
    ThrowError(CODBCERR::eExecDirect);

if ( SQLFetch(m_hstmt) == SQL_ERROR )
    ThrowError(CODBCERR::eFetch);

    SQLFreeStmt(m_hstmt, SQL_CLOSE);

    m_txn.StockLevel.exec_status_code = eOK;
    break;
}
catch (CODBCERR *e)
{
    if (!(e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
        throw;

    // hit deadlock; backoff for increasingly longer
    // period
    delete e;
    Sleep(10 * iTryCount);
}
}

// if (iTryCount)
// throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtNewOrder) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols1) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols2) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.NewOrder.w_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);
}

```

```

        for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
        {
            if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) != SQL_SUCCESS
            )
                ThrowError(CODBCERR::eBindParam);
        }

        // set the bind offset pointer
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_BindOffset,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.NewOrder.OL[0].ol_stock, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.OL[0].ol_i_price, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.OL[0].ol_amount, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the second result set
        if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.w_tax, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.d_tax, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.c_last, sizeof(m_txn.NewOrder.c_last), NULL) !=
SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.c_discount, 0, NULL) != SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.c_credit, sizeof(m_txn.NewOrder.c_credit), NULL) !=
SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0, NULL) !=
SQL_SUCCESS
            || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_no_commit_flag, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindCol);
    }

void CTPCC_ODBC::NewOrder()

```

```

    {
        int i;
        RETCODE rc;
        int iTryCount =
0;

        // 0 1 2
        // 012345678901234567890123456789
        wchar_t szSqlTemplate[] =
L"{call tpcc_neworder(?,?,?,?,"
L"?,?,?,?,?,?,?,?,?,?,?,?,?,"
L"?,?,?,?,?,?,?,?,?,?,?,?,?,"
L"?,?,?,?,?,?,?,?,?,?)}";

        m_hstmt = m_hstmtNewOrder;

        // associate the parameter and column bindings for this transaction
        if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        // clip statement buffer based on number of parameters
        // fixed part is 29 chars and variable part is 6 chars per line item
        i = 29 + m_txn.NewOrder.o_ol_cnt*6;
        wcsncpy( &szSqlTemplate[i], L"");

        // check whether any order lines are for a remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
        {
            if (m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {
                m_txn.NewOrder.o_all_local = 0; // at least
                one remote warehouse
                break;
            }
        }

        while (TRUE)
        {
            try
            {
                m_BindOffset = 0;
                rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)szSqlTemplate, SQL_NTS);
                if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
                    ThrowError(CODBCERR::eExecDirect);

                // Get order line results
                m_txn.NewOrder.total_amount = 0;
                for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
                {
                    // set the bind offset value...
                    m_BindOffset = i *
sizeof(m_txn.NewOrder.OL[0]);

                    if ( SQLFetch(m_hstmt) ==
SQL_ERROR)
                        ThrowError(CODBCERR::eFetch);
                }
            }
        }
    }

```

```

// move to the next resultset
if ( SQLMoreResults(m_hstmt) ==
SQL_ERROR )
ThrowError(CODBCERR::eMoreResults);
m_txn.NewOrder.OL[i].ol_amount;
}
// associate the column bindings for the
second result set
if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2, SQL_IS_POINTER
) != SQL_SUCCESS )
ThrowError(CODBCERR::eSetStmtAttr);
if ( SQLFetch(m_hstmt) == SQL_ERROR )
ThrowError(CODBCERR::eFetch);
SQLFreeStmt(m_hstmt, SQL_CLOSE);
if (m_no_commit_flag == 1)
{
m_txn.NewOrder.total_amount +=
((1 + m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));
m_txn.NewOrder.exec_status_code = eOK;
}
else
m_txn.NewOrder.exec_status_code = eInvalidItem;
break;
}
catch (CODBCERR *e)
{
if ((!e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
throw;
// hit deadlock; backoff for increasingly longer
period
delete e;
Sleep(10 * iTryCount);
}
}
// if (iTryCount)
// throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}
void CTPCC_ODBC::InitPaymentParams()
{
if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtPayment) != SQL_SUCCESS )
ThrowError(CODBCERR::eAllocHandle);
m_hstmt = m_hstmtPayment;
int i = 0;
if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.Payment.w_id, 0, NULL)
!= SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
&m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.Payment.c_last), 0, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), NULL) != SQL_SUCCESS
)
ThrowError(CODBCERR::eBindParam);
i = 0;
if ( SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_street_1, sizeof(m_txn.Payment.w_street_1), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_street_2, sizeof(m_txn.Payment.w_street_2), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_city, sizeof(m_txn.Payment.w_city),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_state, sizeof(m_txn.Payment.w_state),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_zip, sizeof(m_txn.Payment.w_zip),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_street_1, sizeof(m_txn.Payment.d_street_1), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_street_2, sizeof(m_txn.Payment.d_street_2), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_city, sizeof(m_txn.Payment.d_city),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_state, sizeof(m_txn.Payment.d_state),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_zip, sizeof(m_txn.Payment.d_zip),
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_first, sizeof(m_txn.Payment.c_first),
NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_middle, sizeof(m_txn.Payment.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_street_1, sizeof(m_txn.Payment.c_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_street_2, sizeof(m_txn.Payment.c_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_city, sizeof(m_txn.Payment.c_city),
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_state, sizeof(m_txn.Payment.c_state),
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_zip, sizeof(m_txn.Payment.c_zip),
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_phone, sizeof(m_txn.Payment.c_phone),
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_credit, sizeof(m_txn.Payment.c_credit), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_credit_lim, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_discount, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_balance, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_data, sizeof(m_txn.Payment.c_data),
NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::Payment()
{
    RETCODE          rc;
    int              iTryCount = 0;

    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)"L" {call tpcc_payment(?,?,?,?,?,?)}", SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);

            if (m_txn.Payment.c_id == 0)

```

```

                throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code
= eOK;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!(e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
                throw;

            // hit deadlock; backoff for increasingly longer
            period

            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtOrderStatus) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.OrderStatus.w_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    // configure block cursor
    if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) != SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS

```

```

    )
    ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.OrderStatus.OL[0].ol_supply_w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.OrderStatus.OL[0].ol_i_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.OrderStatus.OL[0].ol_quantity, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.OrderStatus.OL[0].ol_amount, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.OL[0].ol_delivery_d, 0,
NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.OrderStatus.c_last, sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.OrderStatus.c_first, sizeof(m_txn.OrderStatus.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.OrderStatus.c_middle, sizeof(m_txn.OrderStatus.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.OrderStatus.o_carrier_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.OrderStatus.c_balance, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.OrderStatus.o_id, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::OrderStatus()
{
    int
iTryCount = 0;
    RETCODE
rc;

    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {

```

```

// configure block cursor
if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_ARRAY_SIZE, (SQLPOINTER)1, 0) != SQL_SUCCESS )
    ThrowError(CODBCERR::eSetStmtAttr);

    rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)"L"{call tpcc_orderstatus(?,?,?)}", SQL_NTS);
    if ( ((rc == SQL_SUCCESS_WITH_INFO)
&& (m_RowsFetched != 0)) || (rc == SQL_ERROR) )

    ThrowError(CODBCERR::eExecDirect);

// configure block cursor
if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OL_ORDER_STATUS_ITEMS, 0) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eSetStmtAttr);

    rc = SQLFetchScroll( m_hstmt,
SQL_FETCH_NEXT, 0 );
    if ( ((rc == SQL_SUCCESS_WITH_INFO)
&& (m_RowsFetched != 0)) || (rc == SQL_ERROR) )

    ThrowError(CODBCERR::eFetchScroll);

    m_txn.OrderStatus.o_ol_cnt =
(short)m_RowsFetched;

    if (m_txn.OrderStatus.o_ol_cnt != 0)
    {
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        if ( SQLMoreResults(m_hstmt) ==
SQL_ERROR )

        ThrowError(CODBCERR::eMoreResults);

        if ( ( rc = SQLFetch(m_hstmt)) ==
SQL_ERROR )

        ThrowError(CODBCERR::eFetch);
    }

    SQLFreeStmt(m_hstmt, SQL_CLOSE);

    if (m_txn.OrderStatus.o_ol_cnt == 0)
        throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
    else if (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
        throw new CTPCC_ODBC_ERR(
CTPCC_ODBC_ERR::ERR_INVALID_CUST );
    else

    m_txn.OrderStatus.exec_status_code = eOK;

        break;
    }
    catch (CODBCERR *e)
    {

```

```

        if ((!e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
            throw;

        // hit deadlock; backoff for increasingly longer
        period

        delete e;
        Sleep(10 * iTryCount);
    }

    //
    // if (iTryCount)
    //     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtDelivery) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtDelivery;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.Delivery.w_id, 0, NULL)
!= SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    for (i=0; i<10; i++)
    {
        if ( SQLBindCol(m_hstmt, (UWORD)(i+1),
SQL_C_SLONG, &m_txn.Delivery.o_id[i], 0, NULL) != SQL_SUCCESS )
            ThrowError(CODBCERR::eBindCol);
    }
}

void CTPCC_ODBC::Delivery()
{
    RETCODE          rc;
    int              iTryCount = 0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)L"{call tpcc_delivery(?,?)}", SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt) == SQL_ERROR )
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);
            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
    }
}

```

```

    }
    catch (CODBCERR *e)
    {
        if ((!e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
            throw;

        // hit deadlock; backoff for increasingly longer
        period

        delete e;
        Sleep(10 * iTryCount);
    }

    //
    // if (iTryCount)
    //     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

```

tpcc_odbc.h

```

/*      FILE:          TPCC_ODBC.H
 *
 *      Microsoft TPC-C Kit Ver.
4.20.000
 *
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *
 *      Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 *      PURPOSE:      Header file for TPC-C txn class
implementation.
 *
 *      Change history:
 *
 *          4.20.000 - updated rev number to match kit
 */
#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn, //
        error from SQLAllocConnect
        eAllocHandle, // error from
        SQLAllocHandle
        eConnOption, // error from
        SQLSetConnectOption
        eConnect, // error from
        SQLConnect
        eAllocStmt, //
        error from SQLAllocStmt
        eExecDirect, // error from
        SQLExecDirect
        eBindParam, //
        error from SQLBindParameter
    }
};

```



```

SQLBindCol          eBindCol,          // error from
error from SQLFetch eFetch,          //
SQLFetchScroll     eFetchScroll,      // error from
SQLMoreResults     eMoreResults,      // error from
SQLPrepare         ePrepare,          // error from
SQLExecute        eExecute,          // error from
SQLSetEnvAttr     eSetEnvAttr,       // error from
SQLSetStmtAttr    eSetStmtAttr       // error from
};
CODBCERR(void)
{
    m_eAction = eNone;
    m_NativeError = 0;
    m_bDeadLock = FALSE;
    m_odbcerrstr = NULL;
};
~CODBCERR()
{
    if(m_odbcerrstr != NULL)
        delete [] m_odbcerrstr;
};
ACTION m_eAction;
int m_NativeError;
BOOL m_bDeadLock;
char *m_odbcerrstr;

int ErrorType() {return ERR_TYPE_ODBC;};
int ErrorNum() {return m_NativeError;};
char *ErrorText() {return m_odbcerrstr;};

};

class CTPCC_ODBC_ERR : public CBaseErr
{
public:
    enum TPCC_ODBC_ERRS
    {
        ERR_WRONG_SP_VERSION = 1, //
        "Wrong version of stored procs on database server"
        ERR_INVALID_CUST,
        // "Invalid Customer id,name."
        ERR_NO_SUCH_ORDER,
        // "No orders found for customer."
        ERR_RETRIED_TRANS,
        // "Retries before transaction succeeded."
    };

    CTPCC_ODBC_ERR( int iErr ) { m_erno = iErr;
m_iTryCount = 0; };

    CTPCC_ODBC_ERR( int iErr, int iTryCount ) {
m_erno = iErr; m_iTryCount = iTryCount; };

    int m_erno;
    int m_iTryCount;

    int ErrorType() {return ERR_TYPE_TPCC_ODBC;};
};

int ErrorNum() {return m_erno;};
char *ErrorText();
};

class DIIDecl CTPCC_ODBC : public CTPCC_BASE
{
private:
    // declare variables and private functions here...
    BOOL m_bDeadlock; //
    // transaction was selected as deadlock victim
    int m_MaxRetries; //
    // retry count on deadlock

    SQLHENV m_henv;
    // ODBC environment handle
    SQLHDBC m_hdbc;
    SQLHSTMT m_hstmt; //
    // the current hstmt

    SQLHSTMT m_hstmtNewOrder;
    SQLHSTMT m_hstmtPayment;
    SQLHSTMT m_hstmtDelivery;
    SQLHSTMT m_hstmtOrderStatus;
    SQLHSTMT m_hstmtStockLevel;

    SQLHDESC m_descNewOrderCols1;
    SQLHDESC m_descNewOrderCols2;
    SQLHDESC m_descOrderStatusCols1;
    SQLHDESC m_descOrderStatusCols2;

    // new-order specific fields
    SQLUIINTEGER m_BindOffset;
    SQLUIINTEGER m_RowsFetched;
    int m_no_commit_flag;

    void ThrowError( CODBCERR::ACTION eAction );

    void InitNewOrderParams();
    void InitPaymentParams();
    void InitDeliveryParams();
    void InitStockLevelParams();
    void InitOrderStatusParams();

    union
    {
        NEW_ORDER_DATA
        NewOrder;
        PAYMENT_DATA Payment;
        DELIVERY_DATA Delivery;
        STOCK_LEVEL_DATA StockLevel;
        ORDER_STATUS_DATA OrderStatus;
        m_txn;
    };

public:
    CTPCC_ODBC(LPCSTR szServer, LPCSTR szUser,
LPCSTR szPassword, LPCSTR szHost, LPCSTR szDatabase);
~CTPCC_ODBC(void);

    inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return &m_txn.NewOrder; };
    inline PPAYMENT_DATA
BuffAddr_Payment() { return &m_txn.Payment; };
    inline PDELIVERY_DATA
BuffAddr_Delivery() { return &m_txn.Delivery; };
    inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
{ return &m_txn.StockLevel; };
};

```

```

        inline PORDER_STATUS_DATA
BuffAddr_OrderStatus()    { return &m_txn.OrderStatus; };

        void NewOrder          ();
        void Payment           ();
        void Delivery          ();
        void StockLevel        ();
        void OrderStatus       ();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword,
LPCSTR szHost, LPCSTR szDatabase );

typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR);

tpcc_tux.cpp

/*      FILE:          TPCC_TUX.CPP
*          Microsoft TPC-C Kit Ver.
4.20.000
*          Copyright Microsoft, 1999
*          All Rights Reserved
*
*          Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
*      PURPOSE:      Implementation for TPC-C Tuxedo class.
*      Contact:     Charles Levine (clevine@microsoft.com)
*
*      Change history:
*          4.20.000 - updated rev number to match kit
*/

#include <windows.h>
#include <process.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <tmenv.h>
#include <xa.h>
#include <atmi.h>

#ifdef ICECAP
// for IceCAP profiling
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h" //tpckit transaction
header contains definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"

```

```

#include "tpcc_tux.h" // interface
to Tuxedo libraries

static TPINIT          *tpinf;
static DWORD           TLSIsTpInitedKey;
static CRITICAL_SECTION TpCriticalSection;

BOOL WINAPIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);

            // create thread local storage to determine
            Tuxedo initialization per thread.
            // it really should be possible to do this in the
            DLL_THREAD_ATTACH call, but
            // Ed says he could not get it to work.
            // assumption: value init'd to 0
            TLSIsTpInitedKey = TlsAlloc();

            if ((tpinf = (TPINIT *)tpalloc("TPINIT",
            NULL, sizeof(TPINIT))) == NULL)
            {
                // int TpRc = tperrno;
                return FALSE;
            }
            tpinf->flags |= TPMULTICONTEXTS;

            InitializeCriticalSection(&TpCriticalSection);
            break;

        case DLL_PROCESS_DETACH:
            TlsFree(TLSIsTpInitedKey);
            DeleteCriticalSection(&TpCriticalSection);
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

static void ThrTpInit()
{
    static int num_tpinit=0;
    int iRc, TpRc;

    // has this thread been initialized? check thread local storage
    if(!TlsGetValue(TLSIsTpInitedKey))
    {
        EnterCriticalSection(&TpCriticalSection);
        itoa(++num_tpinit, tpinf->cltname, 10);

        iRc = tpinit(tpinf);
        TpRc = tperrno;
        LeaveCriticalSection(&TpCriticalSection);

        if (iRc < 0)
            throw new CTUXERR( tperrno );

        int value = 1;
        TlsSetValue(TLSIsTpInitedKey,&value);
    }
}

```

```

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_TUXEDO* CTPCC_TUXEDO_new()
{
    return new CTPCC_TUXEDO();
}

CTPCC_TUXEDO::CTPCC_TUXEDO()
{
    // Add initialization of Tuxedo Structures
    m_txn = (TUX_DATA *)tpalloc("CARRAY", NULL,
sizeof(TUX_DATA));
    if (m_txn == NULL)
        throw new CTUXERR( tperno );
}

CTPCC_TUXEDO::~~CTPCC_TUXEDO()
{
    // free the data structure allocated with tpalloc
    tpfree((char *)m_txn);
}

void CTPCC_TUXEDO::NewOrder()
{
    long    ilen, *olen;

    ThrTpInit();

    ilen = sizeof(TUX_DATA);
    olen = &ilen;

    if (tpcall("NEWORDER", (char *)m_txn, ilen, (char **)&m_txn,
(long *)olen, TPSIGRSTRT) == -1)
        throw new CTUXERR( tperno );

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CTUXERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_TUXEDO::Payment()
{
    long    ilen, *olen;

    ThrTpInit();

    ilen = sizeof(TUX_DATA);
    olen = &ilen;

    if (tpcall("PAYMENT", (char *)m_txn, ilen, (char **)&m_txn, (long
*)olen, TPSIGRSTRT) == -1)
        throw new CTUXERR( tperno );

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CTUXERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_TUXEDO::Delivery()
{
    int      iRc;
    long    ilen, *olen;

    // Note: Delivery txn code in the tuxedo server does not implement
logging of the delivery
    // txn results, so cannot be used as is to run an auditable TPC-C
result. For that
    // reason, delivery txns should not be done via tuxedo.

```

```

// The code is included for completeness.
m_txn->u.Delivery.exec_status_code = eDeliveryFailed;
return;

// normal path...

ThrTpInit();

GetLocalTime(&m_txn->u.Delivery.queue_time);

ilen = sizeof(TUX_DATA);
olen = &ilen;

if ((iRc = tpacall("DELIVERY", (char *)m_txn, ilen,
TPNOREPLY)) == -1)
{
    int TpRc = tperno;
    m_txn->u.Delivery.exec_status_code = eDeliveryFailed;
}
else
    m_txn->u.Delivery.exec_status_code = eOK;
}

void CTPCC_TUXEDO::StockLevel()
{
    long    ilen, *olen;

    ThrTpInit();

    ilen = sizeof(TUX_DATA);
    olen = &ilen;

    if (tpcall("STOCKLEVEL", (char *)m_txn, ilen, (char **)&m_txn,
(long *)olen, TPSIGRSTRT) == -1)
        throw new CTUXERR( tperno );

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CTUXERR( m_txn->ErrorType, m_txn->error
);
}

void CTPCC_TUXEDO::OrderStatus()
{
    long    ilen, *olen;

    ThrTpInit();

    ilen = sizeof(TUX_DATA);
    olen = &ilen;

    if (tpcall("ORDERSTATUS", (char *)m_txn, ilen, (char **)&m_txn,
(long *)olen, TPSIGRSTRT) == -1)
        throw new CTUXERR( tperno );

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CTUXERR( m_txn->ErrorType, m_txn->error
);
}

char *CTUXERR::ErrorText()
{
    if (m_iErrorType == 0)
    {
        if (m_erno == TPEOS)
            sprintf(m_szErrorText, "Error: TUXEDO
error # %d, OS error # %d", m_erno, m_iError );
        else

```

```

        sprintf( m_szErrorText, "Error: TUXEDO
error # %d", m_erno );
    }
    else
        sprintf( m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
    return m_szErrorText;
};

```

tpcc_tux.h

```

/*      FILE:          TPCC_TUX.H
*          Microsoft TPC-C Kit Ver.
4.20.000
*          Copyright Microsoft, 1999
*          All Rights Reserved
*
*          Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
*      PURPOSE:      Header file for TPC-C Tuxedo class
implementation.
*
*      Change history:
*          4.20.000 - updated rev number to match kit
*/

#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_TUXEDO : public CTPCC_BASE
{
private:
    struct TUX_DATA
    {
        int
ErrorType;
        int
error;
        union
        {
            NEW_ORDER_DATA
NewOrder;
            PAYMENT_DATA
Payment;
            DELIVERY_DATA
Delivery;
            STOCK_LEVEL_DATA
StockLevel;
            ORDER_STATUS_DATA
OrderStatus;
        } u;
    } *m_txn;

public:
    CTPCC_TUXEDO();
    ~CTPCC_TUXEDO(void);

    inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return &m_txn->u.NewOrder;
};

```

```

    inline PPAYMENT_DATA
BuffAddr_Payment() { return &m_txn->u.Payment; };
    inline PDELIVERY_DATA
BuffAddr_Delivery() { return &m_txn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA BuffAddr_StockLevel()
{ return &m_txn->u.StockLevel; };
    inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return &m_txn->u.OrderStatus; };

    void NewOrder      ();
    void Payment       ();
    void Delivery      ();
    void StockLevel    ();
    void OrderStatus   ();
};

class CTUXERR : public CBaseErr
{
private:
    // TODO: should use the sz_Msg field of the base class
instead
    char m_szErrorText[64];

public:
    // use this interface for genuine Tuxedo errors
    CTUXERR( int iErr )
    {
        m_erno = iErr;
        m_iErrorType = 0;
        m_iError = GetLastError(); // only
meaningful if m_erno == TPEOS
    };

    // use this interface to impersonate a non-Tuxedo error
type
    CTUXERR( int iErrorType, int iError )
    {
        m_iErrorType = iErrorType;
        m_iError = iError;
        m_erno = 0;
    }

    int m_erno;
    int m_iErrorType;
    int m_iError;

    // A CTUXERR class can impersonate another class,
which happens if the error
// was not actually a Tuxedo error, but was simply
transmitted back via Tuxedo.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return ERR_TYPE_TUXEDO;
        else
            return m_iErrorType;
    }

    int ErrorNum() {return m_erno;};
    char *ErrorText();
};

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_TUXEDO*
CTPCC_TUXEDO_new();

```

```
typedef CTPCC_TUXEDO* (TYPE_CTPCC_TUXEDO)();
```

trans.h

```

/*      FILE:          TRANS.H
 *
 *      Microsoft TPC-C Kit Ver.
4.20.000
 *
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *
 *      Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
 *
 *      PURPOSE:       Header file for TPC-C structure templates.
 *
 *      Change history:
 *      4.20.000 - updated rev number to match kit
 */
#pragma once

// String length constants
#define SERVER_NAME_LEN      20
#define DATABASE_NAME_LEN   20
#define USER_NAME_LEN       20
#define PASSWORD_LEN        20
#define TABLE_NAME_LEN    20
#define I_DATA_LEN          50
#define I_NAME_LEN          24
#define BRAND_LEN           1
#define LAST_NAME_LEN       16
#define W_NAME_LEN          10
#define ADDRESS_LEN         20
#define STATE_LEN           2
#define ZIP_LEN              9
#define S_DIST_LEN          24
#define S_DATA_LEN          50
#define D_NAME_LEN          10
#define FIRST_NAME_LEN      16
#define MIDDLE_NAME_LEN     2
#define PHONE_LEN           16
#define DATETIME_LEN        30
#define CREDIT_LEN          2
#define C_DATA_LEN          250
#define H_DATA_LEN          24
#define DIST_INFO_LEN       24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN          25
#define OL_DIST_INFO_LEN    24

// TIMESTAMP_STRUCT is provided by the ODBC header file sqltypes.h, but
// is not available
// when compiling with dblink, so redefined here. Note: we are using the symbol
// "_SQLTYPES"
// (declared in sqltypes.h) as a way to determine if TIMESTAMP_STRUCT has
// been declared.
#ifdef __SQLTYPES
typedef struct
{
    short
SQLSMALLINT */ year;
    unsigned short
    /* SQLUSMALLINT
 */ month;
    unsigned short
    /* SQLUSMALLINT
 */ day;

```

```

    unsigned short
    /* SQLUSMALLINT
 */ hour;
    unsigned short
    /* SQLUSMALLINT
 */ minute;
    unsigned short
    /* SQLUSMALLINT
 */ second;
    unsigned long
    /* SQLINTEGER */
fraction;
} TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after transaction completes
enum EXEC_STATUS
{
    eOK, // 0 "Transaction
committed."
    eInvalidItem, // 1 "Item number is not valid."
    eDeliveryFailed // 2 "Delivery Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    short ol_supply_w_id;
    long ol_i_id;
    short ol_quantity;

    // output params
    char ol_i_name[I_NAME_LEN+1];
    char ol_brand_generic[BRAND_LEN+1];
    double ol_i_price;
    double ol_amount;
    short ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    short w_id;
    short d_id;
    long c_id;
    short o_ol_cnt;

    // output params
    EXEC_STATUS exec_status_code;
    char c_last[LAST_NAME_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_discount;
    double w_tax;
    double d_tax;
    long o_id;
    short o_commit_flag;
    TIMESTAMP_STRUCT o_entry_d;
    short o_all_local;
    double total_amount;
    OL_NEW_ORDER_DATA
OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    short w_id;
    short d_id;
    long c_id;
    short c_d_id;

```

```

short                c_w_id;
double              h_amount;
char                c_last[LAST_NAME_LEN+1];

// output params
EXEC_STATUS        exec_status_code;
TIMESTAMP_STRUCT  h_date;
char                w_street_1[ADDRESS_LEN+1];
char                w_street_2[ADDRESS_LEN+1];
char                w_city[ADDRESS_LEN+1];
char                w_state[STATE_LEN+1];
char                w_zip[ZIP_LEN+1];
char                d_street_1[ADDRESS_LEN+1];
char                d_street_2[ADDRESS_LEN+1];
char                d_city[ADDRESS_LEN+1];
char                d_state[STATE_LEN+1];
char                d_zip[ZIP_LEN+1];
char                c_first[FIRST_NAME_LEN+1];
char                c_middle[MIDDLE_NAME_LEN
+ 1];
char                c_street_1[ADDRESS_LEN+1];
char                c_street_2[ADDRESS_LEN+1];
char                c_city[ADDRESS_LEN+1];
char                c_state[STATE_LEN+1];
char                c_zip[ZIP_LEN+1];
char                c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT  c_since;
char                c_credit[CREDIT_LEN+1];
double             c_credit_lim;
double             c_discount;
double             c_balance;
char                c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long                ol_i_id;
    short               ol_supply_w_id;
    short               ol_quantity;
    double              ol_amount;
    TIMESTAMP_STRUCT   ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    // input params
    short               w_id;
    short               d_id;
    long                c_id;
    char                c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS        exec_status_code;
    char                c_first[FIRST_NAME_LEN+1];
    char                c_middle[MIDDLE_NAME_LEN+1];
    double              c_balance;
    long                o_id;
    TIMESTAMP_STRUCT   o_entry_d;
    short               o_carrier_id;
    OL_ORDER_STATUS_DATA
OL[MAX_OL_ORDER_STATUS_ITEMS];
    short               o_ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    short               w_id;
    short               o_carrier_id;
} DELIVERY_DATA, *PDELIVERY_DATA;

// output params
EXEC_STATUS        exec_status_code;
SYSTEMTIME         queue_time;
long                o_id[10];
//
id's of delivered orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery transactions and for writing them to
the delivery server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME         queue; //time
    short               w_id; //delivery
    short               o_carrier_id; //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    short               w_id;
    short               d_id;
    short               threshold;

    // output params
    EXEC_STATUS        exec_status_code;
    long                low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

tuxapp.cpp

```

/*      FILE:          TUXAPP.CPP
 *
 *      Microsoft TPC-C Kit Ver.
 *      4.20.000
 *
 *      Copyright Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      Version 4.10.000 audited by
 *      Richard Gimarc, Performance Metrics, 3/17/99
 *
 *      PURPOSE:       Implementation for TPC-C Tuxedo server.
 *      Contact:      Charles Levine (clevine@microsoft.com)
 *
 *      Change history:
 *      4.20.000 - updated rev number to match kit
 */

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <iostream.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include <tmenv.h>

```

```

#include <xa.h>
#include <atmi.h>

#include "..\..\common\src\trans.h" //tpckit transaction
header contains definations of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\db_dblib_dll\src\tpcc_dblib.h" // DBLIB
implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h" // ODBC
implementation of TPC-C txns
#include "tuxapp.h"

char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

// configuration settings from registry
TPCCREGISTRYDATA Reg;

CTPCC_BASE *pTxn = NULL;

#include "..\..\common\src\ReadRegistry.cpp"

/* FUNCTION: tpsvrinit ( int argc, char *argv[] )
 *
 * PURPOSE: Initialize the Server to Database connection.
 *
 * RETURNS: int 0 Success
 *          int -1 Failure
 */

int tpsvrinit ( int argc, char *argv[] )
{
    try
    {
        DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;
        GetComputerName(szMyComputerName, &dwSize);
        szMyComputerName[dwSize] = 0;

        if ( ReadTPCCRegistrySettings( &Reg ) )
            throw new CTUXAPP_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

        GetParameters(argc, argv);

        switch (Reg.eDB_Protocol)
        {
            case ODBC:
                pTxn = new CTPCC_ODBC(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword, szMyComputerName,
Reg.szDbName );
                break;
            case DBLIB:
                pTxn = new CTPCC_DBLIB(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword, szMyComputerName,
Reg.szDbName );
                break;
        }
    }
    catch (CBaseErr *e)
    {
        WriteMessageToEventLog(e->ErrorText());
        delete e;
    }
    catch (...)
    {

```

```

        WriteMessageToEventLog(TEXT("Unhandled
exception."));
    }
    return 0;
}

/* FUNCTION: tpsvrdone ( void )
 *
 */
void tpsvrdone ( void )
{
    delete pTxn;
    pTxn = NULL;
}

/* FUNCTION: BOOL GetParameters(int argc, char *argv[])
 *
 * PURPOSE: This function parses the command line passed in to the
delivery executable, initializing
and filling in global variable parameters.
 *
 * ARGUMENTS: int argc number of command
line arguments passed to delivery
char *argv[] array of
command line argument pointers
 */

static void GetParameters(int argc, char *argv[])
{
    // advance through args until "--" is found
    for(int j=0; j<argc; j++)
    {
        if (strcmp(argv[j], "--") == 0)
            break;
    }

    for(int i=j+1; i<argc; i++)
    {
        if ( argv[i][0] == '-' || argv[i][0] == '/' )
        {
            switch(argv[i][1])
            {
                case 'S':
                    strcpy(Reg.szDbServer,
argv[i+2]);
                    break;
                case 'D':
                    strcpy(Reg.szDbName,
argv[i+2]);
                    break;
                case 'P':
                    strcpy(Reg.szDbPassword, argv[i+2]);
                    break;
                case 'U':
                    strcpy(Reg.szDbUser,
argv[i+2]);
                    break;
                default:
                    cout << "Microsoft
TPC-C Kit" << endl;
                    cout << "Tuxedo
Server" << endl << endl;
                    cout << "Usage:" <<
endl;

```

```

        cout << " tuxapp
[<tuxedo-args>] -- -S<sql-server> [-D<database>] [-U<user>] [-P<password>]"
<< endl << endl;
        cout << "All parameters
default to values in registry." << endl;
        throw new
CTUXAPP_ERR( ERR_BAD_SYNTAX );
    }
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL, TEXT("TUXAPP.EXE"));

    _stprintf(szMsg, TEXT("Error in TUXAPP.EXE: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event source
            EVENTLOG_ERROR_TYPE, // event type
            0, // event category
            0, // event ID
            NULL, // current user's SID
            2, // strings in lpszStrings
            0, // no bytes of raw data
            (LPCTSTR *)lpszStrings, // array of error strings
            NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

void NEWORDER( TPSVCINFO *rqst )
{
    PNEW_ORDER_DATA pNewOrder;
    TUX_DATA *pData;
    const int iSize = sizeof(pData->u.NewOrder);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pNewOrder = pTxn->BuffAddr_NewOrder();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pNewOrder, &pData->u.NewOrder, iSize );

        pTxn->NewOrder();
        memcpy( &pData->u.NewOrder, pNewOrder, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.NewOrder, pNewOrder, iSize );
    }
}

// Note: Delivery txn code below does not implement logging of the delivery
// txn results, so cannot be used as is to run an auditable TPC-C result.
// The code is included for completeness.
void DELIVERY( TPSVCINFO *rqst )
{
    PDELIVERY_DATA pDelivery;
    TUX_DATA *pData;
    const int iSize = sizeof(pData->u.Delivery);

    try
    {
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.Payment, pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

void PAYMENT( TPSVCINFO *rqst )
{
    PPAYMENT_DATA pPayment;
    TUX_DATA *pData;
    const int iSize = sizeof(pData->u.Payment);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pPayment = pTxn->BuffAddr_Payment();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pPayment, &pData->u.Payment, iSize );

        pTxn->Payment();
        memcpy( &pData->u.Payment, pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.Payment, pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.Payment, pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

```



```

    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pDelivery = pTxn->BuffAddr_Delivery();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pDelivery, &pData->u.Delivery, iSize );

        pTxn->Delivery();

        memcpy( &pData->u.Delivery, pDelivery, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.Delivery, pDelivery, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception.));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.Delivery, pDelivery, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

void STOCKLEVEL( TPSVCINFO *rqst )
{
    PSTOCK_LEVEL_DATA    pStockLevel;
    TUX_DATA              *pData;
    const int             iSize =
sizeof(pData->u.StockLevel);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pStockLevel = pTxn->BuffAddr_StockLevel();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pStockLevel, &pData->u.StockLevel, iSize );

        pTxn->StockLevel();
        memcpy( &pData->u.StockLevel, pStockLevel, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.StockLevel, pStockLevel, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception.));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.StockLevel, pStockLevel, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

void ORDERSTATUS( TPSVCINFO *rqst )
{
    PORDER_STATUS_DATA    pOrderStatus;
    TUX_DATA              *pData;
    const int             iSize = sizeof(pData->u.OrderStatus);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pOrderStatus = pTxn->BuffAddr_OrderStatus();
        assert( rqst->len == sizeof(TUX_DATA) );
        memcpy(pOrderStatus, &pData->u.OrderStatus, iSize );

        pTxn->OrderStatus();
        memcpy( &pData->u.OrderStatus, pOrderStatus, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.OrderStatus, pOrderStatus, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception.));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.OrderStatus, pOrderStatus, iSize );
        tpreturn( TPSUCCESS, 0, rqst->data,
sizeof(TUX_DATA), 0);
    }
}

/* FUNCTION: CTUXAPP_ERR::ErrorText
 *
 */
char* CTUXAPP_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES, "Required
entries missing from registry." },
        { ERR_BAD_SYNTAX,
"Syntax error in input parameters."
},
    },
};

```

```

        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in registry." },
        { 0,
        ""
    };
};

static char szNotFound[] = "Unknown error number.";

for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_Error == errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

```

tuxapp.h

```

/*      FILE:          TUXAPP.H
*
*      Microsoft TPC-C Kit Ver.
4.20.000
*
*      Copyright Microsoft, 1999
*
*      All Rights Reserved
*
*
*      Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
*      PURPOSE:       Header file for TPC-C Tuxedo server.
*
*      Change history:
*      4.20.000 - updated rev number to match kit
*/

```

```

enum TUXERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_BAD_SYNTAX,
    ERR_UNKNOWN_DB_PROTOCOL
};

class CTUXAPP_ERR : public CBaseErr
{
public:
    TUXERROR m_Error;

    CTUXAPP_ERR(TUXERROR Err) { m_Error =
Err; };

    ~CTUXAPP_ERR() {};

    int ErrorType() {return ERR_TYPE_TUXEDO;};
    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

struct TUX_DATA
{
    int          retval;
    int          error;

    union
    {
        NEW_ORDER_DATA          NewOrder;
        PAYMENT_DATA            Payment;
    }
};

```

```

        DELIVERY_DATA          Delivery;
        STOCK_LEVEL_DATA      StockLevel;
        ORDER_STATUS_DATA     OrderStatus;
    };
};

```

```

static void GetParameters(int argc, char *argv[]);
static void WriteMessageToEventLog(LPTSTR lpszMsg);

```

```

#ifdef __cplusplus
extern "C" {
#endif

void NEWORDER( TPSVCINFO *rqst );
void PAYMENT( TPSVCINFO *rqst );
void DELIVERY( TPSVCINFO *rqst );
void STOCKLEVEL( TPSVCINFO *rqst );
void ORDERSTATUS( TPSVCINFO *rqst );

```

```

#ifdef __cplusplus
}
#endif

```

tuxmain.c

```

/*      FILE:          TUXMAIN.C
*
*      Microsoft TPC-C Kit Ver.
4.20.000
*
*      Copyright Microsoft, 1999
*
*      All Rights Reserved
*
*
*      Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
*      PURPOSE:       Implementation for TPC-C Tuxedo server.
*      Contact:      Charles Levine (clevine@microsoft.com)
*
*      Change history:
*      4.20.000 - updated rev number to match kit
*/

```

```

#include <stdio.h>
#include <xa.h>
#include <atmi.h>

#ifdef __cplusplus
extern "C" {
#endif

extern int_tmrserver_(int);
extern void DELIVERY_(TPSVCINFO *);
extern void NEWORDER_(TPSVCINFO *);
extern void ORDERSTATUS_(TPSVCINFO *);
extern void PAYMENT_(TPSVCINFO *);
extern void STOCKLEVEL_(TPSVCINFO *);
#ifdef __cplusplus
}
#endif

static struct tmdspcttbl_t_tmdspcttbl[] = {
    { "DELIVERY", "DELIVERY", (void *)_(TPSVCINFO *)},
    DELIVERY, 0, 0 },
    { "NEWORDER", "NEWORDER", (void *)_(TPSVCINFO *)},
    NEWORDER, 1, 0 },
    { "ORDERSTATUS", "ORDERSTATUS", (void *)
_((TPSVCINFO *)) ORDERSTATUS, 2, 0 },
    { "PAYMENT", "PAYMENT", (void *)_(TPSVCINFO *)},
    PAYMENT, 3, 0 },
};

```

```

        { "STOCKLEVEL", "STOCKLEVEL", (void (*)_)((TPSVCINFO
*)) STOCKLEVEL, 4, 0 },
        { NULL, NULL, NULL, 0, 0 }
};

#ifdef _TMDLLIMPORT
#define _TMDLLIMPORT
#endif

_TMDLLIMPORT extern struct xa_switch_t tnull_switch;

struct tmsvrargs_t tmsvrargs = {
    NULL,
    &_tmdsptchtbl[0],
    0,
    tpsvrinit,
    tpsvrdone,
    _tmrunserver, /* PRIVATE */
    NULL, /* RESERVED */
    NULL, /* RESERVED */
    NULL, /* RESERVED */
    NULL /* RESERVED */
};

struct tmsvrargs_t *
#ifdef _TMPROTOTYPES
_tmgetsvrargs(void)
#else
_tmgetsvrargs()
#endif
{
    tmsvrargs.xa_switch = &tnull_switch;
    return(&tmsvrargs);
}

int
#ifdef _TMPROTOTYPES
main(int argc, char **argv)
#else
main(argc,argv)
int argc;
char **argv;
#endif
{
#ifdef TMMAINEXIT
#include "mainexit.h"
#endif

    return( _tmstartserver( argc, argv, _tmgetsvrargs()));
}

```

txn_base.h

```

/* FILE: TXN_BASE.H
* Microsoft TPC-C Kit Ver.
4.20.000
* Copyright Microsoft, 1999
* All Rights Reserved
*
* Version 4.10.000 audited by
Richard Gimarc, Performance Metrics, 3/17/99
*
* PURPOSE: Header file for TPC-C txn class
implementation.
*
* Change history:
* 4.20.000 - updated rev number to match kit

```

```

*/
#pragma once

// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
BuffAddr_OrderStatus() = 0;

    virtual void NewOrder() = 0;
    virtual void Payment() = 0;
    virtual void Delivery() = 0;
    virtual void StockLevel() = 0;
    virtual void OrderStatus() = 0;
};

```

txnlog.h

```

/* FILE: TXNLOG.H
* Microsoft TPC-C Kit Ver.
4.10.000
*
* NOTE: this file is RTE specific
and should not be included
* in Full Disclosure Reports.
*
* Copyright Microsoft, 1999
*
* PURPOSE: Structure definitions for logging delivery txn
completion stats.
* Contact: Charles Levine (clevine@microsoft.com)
*/

```

```

typedef struct _TXN_NEWORDER
{
    BYTE OL_Count; //range 0 to 31
    BYTE OL_Remote_Count; //range 0 to 31
    WORD c_id;
    int o_id;
} TXN_NEWORDER;

typedef struct _TXN_PAYMENT
{
    BYTE CustByName;
    BYTE IsRemote;
} TXN_PAYMENT;

typedef struct _TXN_ORDERSTATUS

```

```

{
    BYTE    CustByName;
} TXN_ORDERSTATUS;

typedef union _TXN_DETAILS
{
    TXN_NEWORDER  NewOrder;
    TXN_PAYMENT   Payment;
    TXN_ORDERSTATUS  OrderStatus;
} TXN_DETAILS;

// Common header for all records in txn log. The TxnType field is
// a switch which identifies the particular variant.
#define TXN_REC_TYPE_CONTROL          1 //
#define TXN_REC_TYPE_TPCC            2 //
// replaces TRANSACTION_TYPE_TPCC
#define TXN_REC_TYPE_TPCC_DELIV_DEF  3 //

typedef struct _TXN_RECORD_HEADER
{
    JULIAN_TIME    TxnStartT0; //
start of txn
    BYTE    TxnType; // one of
TXN_REC_TYPE_*
    BYTE    TxnSubType; //
depends on TxnType
} TXN_RECORD_HEADER, *PTXN_RECORD_HEADER;

typedef struct _TXN_RECORD_CONTROL
{
    // common header; must exactly match
TXN_RECORD_HEADER
    JULIAN_TIME    TxnStartT0; //
start of txn
    BYTE    TxnType; // =
TXN_REC_TYPE_CONTROL
    BYTE    TxnSubType; //
depends on TxnType
// end of common header

    DWORD    Len; //
number of bytes after this field
} TXN_RECORD_CONTROL, *PTXN_RECORD_CONTROL;

// TPC-C Txn Record Layout:
//
//TxnStartT0' is a Julian timestamp corresponding to the moment the
//txn is sent to the SUT, i.e., beginning of response time. Deltas
//are in milliseconds. Note that if RTDelay > 0, then the txn was
//delayed by this amount. The delay occurs at the beginning of the
//response time. So if RTDelay > 0, then the txn was actually sent
//at TxnStartT0 + RTDelay.
//
//Graphically:
//
// time -->
//
// |--- Menu ---|--- Keying ---|--- Response ---|--- Think ---|
// <- DeltaT1 -> <- DeltaT2 -> <- DeltaT4 -> <- DeltaT3 ->
//      ^
//      ^ TxnStartT0
//
//RTDelay is the amount of response time delay included in DeltaT4.
//RTDelay is recorded per txn because this value can be changed on
//the fly, and so may vary from txn to txn.
//
//TxnStatus is the txn completion code. It is used to indicate errors.
//For example, in the New Order txn, 1% of txns abort. TxnStatus will
//reflect this.

typedef struct _TXN_RECORD_TPCC
{
    // common header; must exactly match
TXN_RECORD_HEADER
    JULIAN_TIME    TxnStartT0; //
start of txn
    BYTE    TxnType; // =
TXN_REC_TYPE_TPCC
    BYTE    TxnSubType; //
depends on TxnType
// end of common header

    int    DeltaT1; // menu time (ms)
    int    DeltaT2; // keying time (ms)
    int    DeltaT3; // think time (ms)
    int    DeltaT4; // response time (ms)
    int    RTDelay; // response time delay
(ms)
    int    TxnError; // error code
providing more detail for TxnStatus
    WORD    w_id; // warehouse
ID
    BYTE    d_id; // assigned
district ID for this thread
    BYTE    d_id_ThisTxn; // district ID chosen for
this particular
    BYTE    TxnStatus; // completion status for
txn to indicate errors
    BYTE    reserved; // for word alignment
    TXN_DETAILS    TxnDetails; //
} TXN_RECORD_TPCC, *PTXN_RECORD_TPCC;

// TPC-C Deferred Delivery Txn Record Layout:
//
//Incorporating delivery transaction information into the above
//structure would increase the size of TXN_DETAILS from 8 to 42
bytes.
//Hence, we store delivery transaction details in a separate structure.
//
typedef struct _TXN_RECORD_TPCC_DELIV_DEF
{
    // common header; must exactly match
TXN_RECORD_HEADER
    JULIAN_TIME    TxnStartT0; //
start of txn
    BYTE    TxnType; // =
TXN_REC_TYPE_TPCC_DELIV_DEF
    BYTE    TxnSubType; //
= 0
// end of common header

    int    DeltaT4; // response time (ms)
    int    DeltaTxnExec; // execution
time (ms)
    WORD    w_id; // warehouse
ID
    BYTE    TxnStatus; // completion status for
txn to indicate errors
    BYTE    reserved; // for word alignment
    short    o_carrier_id; // carrier id
    long    o_id[10]; // returned delivery
transaction ids

```

```

        } TXN_RECORD_TPCC_DELIV_DEF,
*PTXN_RECORD_TPCC_DELIV_DEF;

#define TXN_LOG_VERSION 1
#define TXN_DATA_START 4096 // offset in
log file where log records start
#define TXN_LOG_EYE_CATCHER "BC" // signature
bytes at the start of log file

////////////////////////////////////
// The transaction log has a header as the first 4K block.
//
typedef struct _TXN_LOG_HEADER
{
    char EyeCatcher[2]; //
signature bytes; should always be "BC"
    int LogVersion;
// set to TXN_LOG_VERSION
    JULIAN_TIME BeginTxnTS;
// timestamp of first (lowest) txn start
    JULIAN_TIME EndTxnTS;
// timestamp of last (highest) txn completion time
    int iRecCount;
// number of records in log file
    BOOL bLogSorted;
    int iFileSize;
// file size in bytes

// the record map provides a fast way to get close to a
particular timestamp in a sorted log file.
//
//
// timestamp of record
//
// int
iPos; // byte position in file
//
//
RecMap[RecMapSize];
##define RecMapSize 200

} TXN_LOG_HEADER, *PTXN_LOG_HEADER;

#define READ_BUFFER_SIZE 64*1024
#define WRITE_BUFFER_SIZE 8*1024

#define NUM_READ_BUFFERS 1
#define NUM_WRITE_BUFFERS 2
#define MAX_NUM_BUFFERS 2

// flags passed in to the constructor
#define TXN_LOG_WRITE 0x01
#define TXN_LOG_READ 0x02
#define TXN_LOG_SORTED 0x04

#define TXN_LOG_OS_ERROR 1
#define TXN_LOG_NOT_SORTED 2

#define SKIP_CTRL_RECS 1

class CTxnLog
{
private:

```

```

        DWORD iBufferSize;
//buffer allocated size
        DWORD iBytesFreeInBuffer;
//total bytes available for use in buffer
        int iNumBuffers;
//buffers in use
        int iActiveBuffer;
//indicates which buffer is active: 0 or 1
        int iIoBuffer;
//buffer for any pending IO operation
        int iFilePointer;
//position in file.
        int iNextRec;
//when reading, ordinal value of next record

// A "save point" is remembered each time
getNextRecord is called with a start time specified.
// The next time it is called, if start time is after the save
point, we start scanning from the
// save point. This is particularly useful in
FindBestInterval, where the log is scanned repeatedly.
        JULIAN_TIME SavePtTime;
        int
iSavePtFilePointer;
        int
iSavePtNextRec;

        JULIAN_TIME lastTS;
//when writing sorted output, used to verify records are sorted
        BOOL bWrite;
//writing log file

        BOOL bLogSorted;
// is log file sorted? applies to both input and output
        JULIAN_TIME BeginTxnTS;
// timestamp of first (lowest) txn start
        JULIAN_TIME EndTxnTS;
// timestamp of last (highest) txn completion time
        int iRecCount;
// number of records in log file

        BYTE *pCurrent;
//ptr to current buffer
        BYTE
*pBuffer[MAX_NUM_BUFFERS];

        PTXN_RECORD_HEADER *TxnArray;
//transaction record pointer array for sort

        DWORD dwError;
        HANDLE hTxnFile;
//handle to log file
        HANDLE hMapFile;
//map file used when sorting the log
        HANDLE hIoComplete;
//event to signify that there are no pending IOs
        HANDLE hLogFileIo;
//event to signal the IO thread to write the inactive buffer

        Spinlock Spin;
//spin lock to protect the txn log file buffers

        int Write(BYTE *ptr, DWORD Size);
        static void LogFileIO(CTxnLog *);

public:
        CTxnLog(LPCTSTR szFileName, DWORD
dwOpts);

```

```

~CTxnLog(void);

int WriteToLog(PTXN_RECORD_TPCC pTxnRcrd);
int WriteToLog(PTXN_RECORD_TPCC_DELIV_DEF
pTxnRcrd);
int WriteToLog(PTXN_RECORD_CONTROL
pCtrlRec);
int WriteToLog(PTXN_RECORD_HEADER pCtrlRec);
int WriteCtrlRecToLog(BYTE SubType, LPTSTR lpStr,
DWORD dwLen);

void CloseTransactionLogFile(void);

PTXN_RECORD_HEADER GetNextRecord(BOOL
bSkipCtrlRecs = FALSE);
PTXN_RECORD_HEADER
GetNextRecord(JULIAN_TIME SeekTimeT0, BOOL bSkipCtrlRecs =
FALSE);

int Sort(void);
PTXN_RECORD_HEADER GetSortedRecord(int
index);

inline BOOL IsSorted(void) { return bLogSorted; };
inline JULIAN_TIME BeginTS(void) { return
BeginTxnTS; };
};
};

inline JULIAN_TIME EndTS(void) { return EndTxnTS;
};

inline int RecordCount(void) { return iRecCount; };

class CTXNLOG_ERR : public CBaseErr
{
public:
enum CTPCC_DBLIB_ERRS
{
ERR_BAD_FILE_FORMAT = 1, // "File format is invalid."
ERR_UNKNOWN_LOG_VERSION, // "Log file version is unknown."
ERR_BROKEN_LOG_FILE, // "Log file is broken."
ERR_LOG_NOT_SORTED, // "Log file is not sorted"
ERR_INVALID_TIME_SEQ, // "Internal Error: Record Time Sequence invalid."
};

CTXNLOG_ERR( int iErr ) { m_errno = iErr; };

int m_errno;

int ErrorType() {return ERR_TYPE_TXNLOG;};
int ErrorNum() {return m_errno;};

// TODO: need to complete...
char *ErrorText() {return "";};
};

webclnt.dsp

# Microsoft Developer Studio Project File - Name="webclnt" - Package
Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 5.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Application" 0x0101
CFG=webclnt - Win32 Release
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak" CFG="webclnt - Win32 Release"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "webclnt - Win32 Release" (based on "Win32 (x86) Application")
!MESSAGE "webclnt - Win32 Debug" (based on "Win32 (x86) Application")
!MESSAGE

# Begin Project
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "webclnt - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir ".\Release"
# PROP BASE Intermediate_Dir ".\Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\Release"
# PROP Intermediate_Dir ".\Release"
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
"_WINDOWS" /YX /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
"_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /win32
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib
odbccp32.lib /nologo /subsystem:windows /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib odbccp32.lib
/nologo /subsystem:windows /machine:I386

!ELSEIF "$(CFG)" == "webclnt - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir ".\Debug"
# PROP BASE Intermediate_Dir ".\Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\Debug"
# PROP Intermediate_Dir ".\Debug"

```

```

# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG"
/D "_WINDOWS" /YX /c
# ADD CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
"_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /win32
# ADD BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
/nologo /subsystem:windows /debug /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
/nologo /subsystem:windows /debug /machine:I386

!ENDIF

# Begin Target

# Name "webclnt - Win32 Release"
# Name "webclnt - Win32 Debug"
# End Target
# End Project

```

webclnt.dsw

Microsoft Developer Studio Workspace File, Format Version 6.00
WARNING: DO NOT EDIT OR DELETE THIS WORKSPACE FILE!

```

#####
#####

```

Project: "db_dblib_dll"=.\\db_dblib_dll\\db_dblib_dll.dsp - Package Owner=<4>

```

Package=<5>
{{{
}}}

```

```

Package=<4>
{{{
}}}

```

```

#####
#####

```

Project: "db_odbc_dll"=.\\db_odbc_dll\\db_odbc_dll.dsp - Package Owner=<4>

```

Package=<5>
{{{
}}}

```

```

Package=<4>
{{{
}}}

```

```

#####
#####

```

Project: "install"=.\\install\\install.dsp - Package Owner=<4>

```

Package=<5>
{{{

```

```

}}}
```

```

Package=<4>
```

```

{{{
  Begin Project Dependency
  Project_Dep_Name isapi_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tuxapp
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name db_dblib_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name db_odbc_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_com_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_tuxedo_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tpcc_com_all
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tpcc_com_ps
  End Project Dependency
}}}
```

```

#####
#####

```

Project: "isapi_dll"=.\\isapi_dll\\isapi_dll.dsp - Package Owner=<4>

```

Package=<5>
{{{
}}}

```

```

Package=<4>
{{{

```

```

  Begin Project Dependency
  Project_Dep_Name db_dblib_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name db_odbc_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_tuxedo_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_com_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tm_encina_dll
  End Project Dependency
}}}
```

```

#####
#####

```

Project: "tm_com_dll"=.\\tm_com_dll\\tm_com_dll.dsp - Package Owner=<4>

```

Package=<5>
{{{
}}}

```

```

Package=<4>
```

```

{{{
  Begin Project Dependency
  Project_Dep_Name tpcc_com_ps
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name tpcc_com_all
  End Project Dependency
}}}

#####
#####

Project: "tm_encina_dll"=. \tm_encina_dll\tm_encina_dll.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
#####

Project: "tm_tuxedo_dll"=. \tm_tuxedo_dll\tm_tuxedo_dll.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
#####

Project: "tpcc_com_all"=. \tpcc_com_all\tpcc_com_all.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
  Begin Project Dependency
  Project_Dep_Name tpcc_com_ps
  End Project Dependency
}}}

#####
#####

Project: "tpcc_com_ps"=. \tpcc_com_ps\tpcc_com_ps.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

```

```

#####
#####

Project: "tuxapp"=. \tuxapp\tuxapp.dsp - Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
  Begin Project Dependency
  Project_Dep_Name db_dblib_dll
  End Project Dependency
  Begin Project Dependency
  Project_Dep_Name db_odbc_dll
  End Project Dependency
}}}

#####
#####

Global:

Package=<5>
{{{
}}}

Package=<3>
{{{
}}}

#####
#####

Stored Procedures

neword.sql

-- File:  NEWORD.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates new order transaction stored procedure
--
--       Interface Level: 4.10.000

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_neworder" )
    drop procedure tpcc_neworder
go

create proc tpcc_neworder

                                     @w_id      smallint,
                                     @d_id      tinyint,
                                     @c_id      int,
                                     @o_ol_cnt  tinyint,
                                     @o_all_local tinyint,
                                     @i_id1     int = 0,

@s_w_id1 smallint = 0, @ol_qty1  smallint = 0,
                                     @i_id2     int = 0,

@s_w_id2 smallint = 0, @ol_qty2  smallint = 0,
                                     @i_id3     int = 0,

@s_w_id3 smallint = 0, @ol_qty3  smallint = 0,
                                     @i_id4     int = 0,

@s_w_id4 smallint = 0, @ol_qty4  smallint = 0,

```



```

@s_w_id5 smallint = 0, @ol_qty5 smallint = 0,
@s_w_id6 smallint = 0, @ol_qty6 smallint = 0,
@s_w_id7 smallint = 0, @ol_qty7 smallint = 0,
@s_w_id8 smallint = 0, @ol_qty8 smallint = 0,
@s_w_id9 smallint = 0, @ol_qty9 smallint = 0,
@s_w_id10 smallint = 0, @ol_qty10 smallint = 0,
@s_w_id11 smallint = 0, @ol_qty11 smallint = 0,
@s_w_id12 smallint = 0, @ol_qty12 smallint = 0,
@s_w_id13 smallint = 0, @ol_qty13 smallint = 0,
@s_w_id14 smallint = 0, @ol_qty14 smallint = 0,
@s_w_id15 smallint = 0, @ol_qty15 smallint = 0

```

```

as
declare @w_tax numeric(4,4),
        @d_tax numeric(4,4),
        @c_last char(16),
        @c_credit char(2),
        @c_discount numeric(4,4),
        @i_price numeric(5,2),
        @i_name char(24),
        @i_data char(50),
        @o_entry_d datetime,
        @remote_flag int,
        @s_quantity smallint,
        @s_data char(50),
        @s_dist char(24),
        @li_no int,
        @o_id int,
        @commit_flag tinyint,
        @li_id int,
        @li_s_w_id smallint,
        @li_qty smallint,
        @ol_number int,
        @c_id_local int

```

```
begin
```

```
begin transaction n
```

```
-- get district tax and next available order id and update
-- plus initialize local variables
```

```

update district
set @d_tax = d_tax,
    @o_id = d_next_o_id,
    d_next_o_id = d_next_o_id + 1,
    @o_entry_d = getdate(),
    @li_no = 0,
    @commit_flag = 1
where d_w_id = @w_id and
      d_id = @d_id

```

```
-- process orderlines
```

```

while (@li_no < @o_ol_cnt)
begin

```

```

@i_id5 int = 0,
@i_id6 int = 0,
@i_id7 int = 0,
@i_id8 int = 0,
@i_id9 int = 0,
@i_id10 int = 0,
@i_id11 int = 0,
@i_id12 int = 0,
@i_id13 int = 0,
@i_id14 int = 0,
@i_id15 int = 0,

```

```
select @li_no = @li_no + 1
```

```
-- set i_id, s_w_id, and qty for this lineitem
```

```

select @li_id = case @li_no
           when 1 then @i_id1
           when 2 then @i_id2
           when 3 then @i_id3
           when 4 then @i_id4
           when 5 then @i_id5
           when 6 then @i_id6
           when 7 then @i_id7
           when 8 then @i_id8
           when 9 then @i_id9
           when 10 then @i_id10
           when 11 then @i_id11
           when 12 then @i_id12
           when 13 then @i_id13
           when 14 then @i_id14
           when 15 then @i_id15
end,

```

```

@li_s_w_id = case @li_no
           when 1 then @s_w_id1
           when 2 then @s_w_id2
           when 3 then @s_w_id3
           when 4 then @s_w_id4
           when 5 then @s_w_id5
           when 6 then @s_w_id6
           when 7 then @s_w_id7
           when 8 then @s_w_id8
           when 9 then @s_w_id9
           when 10 then @s_w_id10
           when 11 then @s_w_id11
           when 12 then @s_w_id12
           when 13 then @s_w_id13
           when 14 then @s_w_id14
           when 15 then @s_w_id15
end,

```

```

@li_qty = case @li_no
           when 1 then @ol_qty1
           when 2 then @ol_qty2
           when 3 then @ol_qty3
           when 4 then @ol_qty4
           when 5 then @ol_qty5
           when 6 then @ol_qty6
           when 7 then @ol_qty7
           when 8 then @ol_qty8
           when 9 then @ol_qty9
           when 10 then @ol_qty10
           when 11 then @ol_qty11
           when 12 then @ol_qty12
           when 13 then @ol_qty13
           when 14 then @ol_qty14
           when 15 then @ol_qty15
end

```

```
-- get item data (no one updates item)
```

```

select @i_price = i_price,
       @i_name = i_name,
       @i_data = i_data
from item (tablock repeatableread)
where i_id = @li_id

```

```
-- update stock values
```

```

update stock
set s_ytd = s_ytd + @li_qty,
  @s_quantity = s_quantity - @li_qty +
  case
  when (s_quantity - @li_qty < 10) then 91 else 0 end,
  s_order_cnt = s_order_cnt + 1,
  s_remote_cnt = s_remote_cnt + case
  when (@li_s_w_id = @w_id) then 0 else 1 end,
  @s_data = s_data,
  @s_dist = case @d_id
s_dist_01 when 1 then
s_dist_02 when 2 then
s_dist_03 when 3 then
s_dist_04 when 4 then
s_dist_05 when 5 then
s_dist_06 when 6 then
s_dist_07 when 7 then
s_dist_08 when 8 then
s_dist_09 when 9 then
s_dist_10 when 10 then
  end
where s_i_id = @li_id and
       s_w_id = @li_s_w_id
-- if there actually is a stock (and item) with these ids, go to work
if (@@rowcount > 0)
begin
-- insert order_line data (using data from item and stock)
insert into order_line values(@o_id,
                             @d_id,
                             @w_id,
                             @li_no,
                             @li_id,
                             @li_s_w_id,
                             "dec 31,
                             1899",
                             @li_qty,
                             @i_price
                             * @li_qty,
                             @s_dist)
-- send line-item data to client
select @i_name,
       @s_quantity,

```

```

       b_g = case when (
(patindex("%ORIGINAL%",@i_data) > 0) and
(patindex("%ORIGINAL%",@s_data) > 0) )
       then "B" else "G" end,
       @i_price,
       @i_price * @li_qty
end
else
begin
-- no item (or stock) found - triggers rollback condition
select "",0,"",0,0
select @commit_flag = 0
end
-- get customer last name, discount, and credit rating
select @c_last = c_last,
       @c_discount = c_discount,
       @c_credit = c_credit,
       @c_id_local = c_id
from customer (repeatableread)
where c_id = @c_id and
       c_w_id = @w_id and
       c_d_id = @d_id
-- insert fresh row into orders table
insert into orders values ( @o_id,
                           @d_id,
                           @w_id,
                           @c_id_local,
                           @o_entry_d,
                           0,
                           @o_ol_cnt,
                           @o_all_local)
-- insert corresponding row into new-order table
insert into new_order values ( @o_id,
                              @d_id,
                              @w_id)
-- select warehouse tax
select @w_tax = w_tax
from warehouse (repeatableread)
where w_id = @w_id
if (@commit_flag = 1)
commit transaction n
else
-- all that work for nuthin!!!
rollback transaction n
-- return order data to client
select @w_tax,
       @d_tax,
       @o_id,

```

```

        @c_last,
        @c_discount,
        @c_credit,
        @o_entry_d,
        @commit_flag

end

go

payment.sql

-- File: PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates payment transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_payment" )
    drop procedure tpcc_payment
go

create proc tpcc_payment    @w_id        smallint,
                           @c_w_id      smallint,
                           @h_amount    numeric(6,2),
                           @d_id        tinyint,
                           @c_d_id      tinyint,
                           @c_id        int,
                           @c_last      char(16) = ""

as
declare @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city     char(20),
        @w_state    char(2),
        @w_zip      char(9),
        @w_name     char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city     char(20),
        @d_state    char(2),
        @d_zip      char(9),
        @d_name     char(10),
        @c_first   char(16),
        @c_middle  char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city    char(20),
        @c_state   char(2),
        @c_zip     char(9),
        @c_phone   char(16),
        @c_since   datetime,
        @c_credit  char(2),
        @c_credit_lim numeric(12,2),
        @c_balance numeric(12,2),
        @c_discount numeric(4,4),
        @data     char(500),
        @c_data   char(500),
        @datetime datetime,
        @w_ytd   numeric(12,2),
        @d_ytd   numeric(12,2),
        @cnt     smallint,

```

```

        @val      smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local smallint,
        @c_id_local int

select @screen_data = ""

begin tran p

-- get payment date

        select    @datetime = getdate()

        if (@c_id = 0)
            begin

-- get customer id and info using last name

                select    @cnt = count(*)
                from      customer (repeatableread)
                where     c_last = @c_last and
                c_w_id = @c_w_id and
                c_d_id = @c_d_id

                select    @val = (@cnt + 1) / 2
                set      rowcount @val

                select    @c_id = c_id
                from      customer (repeatableread)
                where     c_last = @c_last and
                c_w_id = @c_w_id and
                c_d_id = @c_d_id

                order    by c_last, c_first

                set      rowcount 0

            end

-- get customer info and update balances

            update    customer
            set        @c_balance = c_balance + @h_amount,
            - @h_amount,
                c_payment_cnt = c_payment_cnt + 1,
                c_ytd_payment = c_ytd_payment + @h_amount,
                @c_first = c_first,
                @c_middle = c_middle,
                @c_last = c_last,
                @c_street_1 = c_street_1,
                @c_street_2 = c_street_2,
                @c_city = c_city,
                @c_state = c_state,
                @c_zip = c_zip,
                @c_phone = c_phone,
                @c_credit = c_credit,
                @c_credit_lim = c_credit_lim,
                @c_discount = c_discount,
                @c_since = c_since,
                @data = c_data,
                @c_id_local = c_id
            where     c_id = @c_id and
                c_w_id = @c_w_id and
                c_d_id = @c_d_id

-- if customer has bad credit get some more info

            if (@c_credit = "BC")

```

```

begin
-- compute new info
select @c_data = convert(char(5),@c_id) +
convert(char(4),@c_d_id) +
convert(char(5),@c_w_id) +
convert(char(4),@d_id) +
convert(char(5),@w_id) +
convert(char(19),@h_amount) +
substring(@data, 1, 458)

-- update customer info

update customer
set c_data = @c_data

where c_id = @c_id and
c_w_id = @c_w_id and
c_d_id = @c_d_id

select @screen_data = substring (@c_data,1,200)

end

-- get district data and update year-to-date

update district
set d_ytd = d_ytd + @h_amount,
@d_street_1 = d_street_1,
@d_street_2 = d_street_2,
@d_city = d_city,
@d_state = d_state,
@d_zip = d_zip,
@d_name = d_name,
@d_id_local = d_id

where d_w_id = @w_id and
d_id = @d_id

-- get warehouse data and update year-to-date

update warehouse
set w_ytd = w_ytd + @h_amount,
@w_street_1 = w_street_1,
@w_street_2 = w_street_2,
@w_city = w_city,
@w_state = w_state,
@w_zip = w_zip,
@w_name = w_name,
@w_id_local = w_id

where w_id = @w_id

-- create history record

insert into history values ( @c_id_local,
@c_d_id,
@c_w_id,
@d_id_local,
@w_id_local,
@datetime,
@h_amount,
@w_name + " " +

@d_name)
commit tran p

-- return data to client

```

```

select @c_id,
@c_last,
@datetime,
@w_street_1,
@w_street_2,
@w_city,
@w_state,
@w_zip,
@d_street_1,
@d_street_2,
@d_city,
@d_state,
@d_zip,
@c_first,
@c_middle,
@c_street_1,
@c_street_2,
@c_city,
@c_state,
@c_zip,
@c_phone,
@c_since,
@c_credit,
@c_credit_lim,
@c_discount,
@c_balance,
@screen_data

```

go

ordstat.sql

```

-- File: ORDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates order status transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_orderstatus" )
drop procedure tpcc_orderstatus

go

create proc tpcc_orderstatus @w_id smallint,
@d_id tinyint,
@c_id int,
@c_last char(16) = ""

as

declare @c_balance numeric(12,2),
@c_first char(16),
@c_middle char(2),
@o_id int,
@o_entry_d datetime,
@o_carrier_id smallint,
@cnt smallint

begin tran o

if (@c_id = 0)
begin

```

```

-- get customer id and info using last name

select    @cnt      = (count(*)+1)/2
from      customer (repeatableread)
where     c_last    = @c_last and
          c_w_id    = @w_id and
          c_d_id    = @d_id

set       rowcount @cnt

select    @c_id      = c_id,
          @c_balance = c_balance,
          @c_first = c_first,
          @c_last  = c_last,
          @c_middle = c_middle
from      customer (repeatableread)
where     c_last    = @c_last and
          c_w_id    = @w_id and
          c_d_id    = @d_id

order    by c_w_id, c_d_id, c_last, c_first

set       rowcount 0

end

else

begin

-- get customer info if by id

select    @c_balance = c_balance,
          @c_first  = c_first,
          @c_middle = c_middle,
          @c_last   = c_last
from      customer (repeatableread)
where     c_id      = @c_id and
          c_d_id    = @d_id and
          c_w_id    = @w_id

select    @cnt      = @@rowcount

end

-- if no such customer

if (@cnt = 0)
begin
raiserror("Customer not found",18,1)
goto custnotfound
end

-- get order info

select    @o_id      = o_id,
          @o_entry_d = o_entry_d,
          @o_carrier_id = o_carrier_id
from      orders (serializable)
where     o_c_id      = @c_id and
          o_d_id      = @d_id and
          o_w_id      = @w_id

order    by o_id asc

-- select order lines for the current order

select    ol_supply_w_id,
          ol_i_id,
          ol_quantity,

```

```

          ol_amount,
          ol_delivery_d
from      order_line (repeatableread)
where     ol_o_id = @o_id and
          ol_d_id = @d_id and
          ol_w_id = @w_id

custnotfound:

commit tran o

-- return data to client

select    @c_id,
          @c_last,
          @c_first,
          @c_middle,
          @o_entry_d,
          @o_carrier_id,
          @c_balance,
          @o_id

go

delivery.sql

-- File: DELIVERY.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates delivery transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_delivery" )
drop procedure tpcc_delivery

go

create proc tpcc_delivery @w_id smallint,
                        @o_carrier_id smallint
as

declare @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
        @oid3 int,
        @oid4 int,
        @oid5 int,
        @oid6 int,
        @oid7 int,
        @oid8 int,
        @oid9 int,
        @oid10 int

select @d_id = 0

begin tran d

while (@d_id < 10)
begin

```

```

select @d_id = @d_id + 1,
       @total = 0,
       @o_id = 0

select top 1
       @o_id = no_o_id
from   new_order (serializable uplock)
where  no_w_id = @w_id and
       no_d_id = @d_id
order  by no_o_id asc

if (@@rowcount < 0)
begin

-- claim the order for this district

delete new_order
where  no_w_id = @w_id and
       no_d_id = @d_id and
       no_o_id = @o_id

-- set carrier_id on this order (and get customer id)

update orders
set    o_carrier_id =

@o_carrier_id,

where  o_w_id = @w_id
and
      o_d_id = @d_id
and
      o_id = @o_id

-- set date in all lineitems for this order (and sum amounts)

update order_line
set    ol_delivery_d = getdate(),
       @total = @total +

ol_amount

where  ol_w_id = @w_id
and
      ol_d_id = @d_id
and
      ol_o_id = @o_id

-- accumulate lineitem amounts for this order into customer

update customer
set    c_balance = c_balance + @total,
       c_delivery_cnt =

c_delivery_cnt + 1

where  c_w_id = @w_id
and
      c_d_id = @d_id
and
      c_id = @c_id

end

select @oid1 = case @d_id when 1 then @o_id else @oid1 end,
       @oid2 = case @d_id when 2 then @o_id else @oid2 end,
       @oid3 = case @d_id when 3 then @o_id else @oid3 end,
       @oid4 = case @d_id when 4 then @o_id else @oid4 end,
       @oid5 = case @d_id when 5 then @o_id else @oid5 end,
       @oid6 = case @d_id when 6 then @o_id else @oid6 end,
       @oid7 = case @d_id when 7 then @o_id else @oid7 end,
       @oid8 = case @d_id when 8 then @o_id else @oid8 end,
       @oid9 = case @d_id when 9 then @o_id else @oid9 end,

```

```

       @oid10 = case @d_id when 10 then @o_id else @oid10 end

end

commit tran d

-- return delivery data to client

select @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10

go

stocklev.sql

-- File: STOCKLEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates stock level transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_stocklevel" )
drop procedure tpcc_stocklevel
go

create proc tpcc_stocklevel @w_id smallint,
                           @d_id tinyint,
                           @threshold smallint
as

declare @o_id_low int,
        @o_id_high int

select @o_id_low = (d_next_o_id - 20),
       @o_id_high = (d_next_o_id - 1)
from   district
where  d_w_id = @w_id and
       d_id = @d_id

select count(distinct(s_i_id))
from   stock_order_line
where  ol_w_id = @w_id and
       ol_d_id = @d_id and
       ol_o_id between @o_id_low and
                @o_id_high and
       s_w_id = ol_w_id and
       s_i_id = ol_i_id and
       s_quantity < @threshold

go

```

version.sql

```

-- File:  VERSION.SQL
--      Microsoft TPC-C Benchmark Kit Ver. 4.22
--      Copyright Microsoft, 2001
-- Purpose: Returns version level of TPC-C stored procs
-- Note:   Always update the return value of this proc for
--         any interface changes or "must have" bug fixes.
--
-- The value returned by this SP defines the "interface level",
-- which must match between the stored procs and the client code.
-- The interface level may be down rev from the current kit. This
-- indicates that the interface hasn't changed since that version.

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_version" )
    drop procedure tpcc_version
go

create proc tpcc_version
as
declare    @version char(8)

begin
    select @version = "4.10.000"
    select @version as "Version"
end

go

```

null-txn.sql

```

-- TPC-C Null Txn Stored Procs
-- Microsoft TPC-C Kit
-- 8/17/99
--
-- This script will create stored procs which accept the same parameters and
-- return correctly formed
-- results sets to match the standard TPC-C stored procs. Of course, the advan-
-- tage is that these
-- stored procs place almost no load on SQL Server and do not require a
-- database.
--
-- The purpose of these stored procs is to size and test the web client without the
-- need of a fully
-- scaled database.
--
drop proc tpcc_delivery
drop proc tpcc_neworder
drop proc tpcc_orderstatus
drop proc tpcc_payment
drop proc tpcc_stocklevel
drop proc tpcc_version
drop table order_line_null
go

create proc tpcc_delivery    @w_id    smallint,

@o_carrier_id smallint
as

declare @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),

```

```

@oid1 int,
@oid2 int,
@oid3 int,
@oid4 int,
@oid5 int,
@oid6 int,
@oid7 int,
@oid8 int,
@oid9 int,
@oid10 int

declare @delaytime varchar(30)

-- uniform random delay of 0 - 1 second; avg = 0.50
select @delaytime = '00:00:0' + cast(cast((rand()*1.00) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

select 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001

GO

create proc tpcc_neworder

@w_id    smallint,
@d_id    tinyint,
@c_id    int,
@o_ol_cnt tinyint,
@o_all_local tinyint,
@i_id1 int = 0,
@i_id2 int = 0,
@i_id3 int = 0,
@i_id4 int = 0,
@i_id5 int = 0,
@i_id6 int = 0,
@i_id7 int = 0,
@i_id8 int = 0,
@i_id9 int = 0,
@i_id10 int = 0,
@i_id11 int = 0,
@i_id12 int = 0,
@i_id13 int = 0,
@i_id14 int = 0,
@i_id15 int = 0,

@s_w_id1 smallint = 0, @ol_qty1 smallint = 0,
@s_w_id2 smallint = 0, @ol_qty2 smallint = 0,
@s_w_id3 smallint = 0, @ol_qty3 smallint = 0,
@s_w_id4 smallint = 0, @ol_qty4 smallint = 0,
@s_w_id5 smallint = 0, @ol_qty5 smallint = 0,
@s_w_id6 smallint = 0, @ol_qty6 smallint = 0,
@s_w_id7 smallint = 0, @ol_qty7 smallint = 0,
@s_w_id8 smallint = 0, @ol_qty8 smallint = 0,
@s_w_id9 smallint = 0, @ol_qty9 smallint = 0,
@s_w_id10 smallint = 0, @ol_qty10 smallint = 0,
@s_w_id11 smallint = 0, @ol_qty11 smallint = 0,
@s_w_id12 smallint = 0, @ol_qty12 smallint = 0,
@s_w_id13 smallint = 0, @ol_qty13 smallint = 0,
@s_w_id14 smallint = 0, @ol_qty14 smallint = 0,
@s_w_id15 smallint = 0, @ol_qty15 smallint = 0

as
declare @w_tax    numeric(4,4),
        @d_tax    numeric(4,4),
        @c_last   char(16),
        @c_credit char(2),
        @c_discount numeric(4,4),
        @i_price   numeric(5,2),

```

```

    @i_name      char(24),
    @o_entry_d   datetime,
                @li_no      int,
                @o_id       int,
                @commit_flag tinyint,
    @li_id       int,
    @li_qty      smallint

declare @delaytime varchar(30)

begin
-- uniform random delay of 0 - 0.6 second; avg = 0.3
select @delaytime = '00:00:0' + cast(cast((rand()*0.60) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

-- process orderlines

        select @commit_flag = 1, @li_no = 0

while (@li_no < @o_ol_cnt)
begin
        select @li_id = case @li_no
                when 1 then @i_id1
                when 2 then @i_id2
                when 3 then @i_id3
                when 4 then @i_id4
                when 5 then @i_id5
                when 6 then @i_id6
                when 7 then @i_id7
                when 8 then @i_id8
                when 9 then @i_id9
                when 10 then @i_id10
                when 11 then @i_id11
                when 12 then @i_id12
                when 13 then @i_id13
                when 14 then @i_id14
                when 15 then @i_id15
        end

        select @li_no = @li_no + 1
        select @i_price = 23.45, @li_qty = @li_no

        if (@li_id = 999999)
        begin
                select ",0",0,0
                select @commit_flag = 0
        end

        else
        begin
                select 'Item Name blah',17,'G', @i_price, @i_price *
@li_qty
        end

        end

-- return order data to client

        select      @w_tax = 0.1234,
                    @d_tax = 0.0987,
                    @o_id = 3001,
                    @c_last = 'BAROUGHTABLE',
                    @c_discount = 0.2198,
                    @c_credit = 'GC',
                    @o_entry_d = getdate()

```

```

        select      @w_tax,
                    @d_tax,
                    @o_id,
                    @c_last,
                    @c_discount,
                    @c_credit,
                    @o_entry_d,
                    @commit_flag

end

GO

create proc tpcc_orderstatus @w_id          smallint,

    @d_id          tinyint,

    @c_id          int,

    @c_last char(16) = "

as

declare @c_balance      numeric(12,2),
        @c_first        char(16),
        @c_middle       char(2),
        @o_id           int,
        @o_entry_d      datetime,
        @o_carrier_id   smallint,
        @ol_cnt         smallint

declare @delaytime varchar(30)

-- uniform random delay of 0 - 0.2 second; avg = 0.1
select @delaytime = '00:00:0' + cast(cast((rand()*0.20) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

        select
                @c_id      = 113,
                @c_balance = -10.00,
                @c_first   = '8YCodgytqCj8',
                @c_middle  = 'OE',
                @c_last    = 'OUGHTOUGHTABLE',
                @o_id      = 3456,
                @o_entry_d = getdate(),
                @o_carrier_id = 1

        select @ol_cnt = (rand() * 11) + 5
        SET ROWCOUNT @ol_cnt

        select
                ol_supply_w_id,
                ol_i_id,
                ol_quantity,
                ol_amount,
                ol_delivery_d
        from order_line_null

        select @c_id,
                @c_last,
                @c_first,
                @c_middle,
                @o_entry_d,
                @o_carrier_id,
                @c_balance,

```



```

        @o_id

GO

create proc tpcc_payment @w_id      smallint,
                                @c_w_id      smallint,
                                @h_amount    numeric(6,2),
                                @d_id        tinyint,
                                @c_d_id      tinyint,
                                @c_id        int,
                                @c_last     char(16) = "

as
declare @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city      char(20),
        @w_state     char(2),
        @w_zip       char(9),
        @w_name      char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city      char(20),
        @d_state     char(2),
        @d_zip       char(9),
        @d_name      char(10),
        @c_first     char(16),
        @c_middle    char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city      char(20),
        @c_state     char(2),
        @c_zip       char(9),
        @c_phone     char(16),
        @c_since     datetime,
        @c_credit    char(2),
        @c_credit_lim numeric(12,2),
        @c_balance   numeric(12,2),
        @c_discount  numeric(4,4),
        @data        char(500),
        @c_data      char(500),
        @datetime    datetime,
        @w_ytd       numeric(12,2),
        @d_ytd       numeric(12,2),
        @cnt         smallint,
        @val         smallint,
        @screen_data char(200),
        @d_id_local  tinyint,
        @w_id_local  smallint,
        @c_id_local  int

declare @delaytime varchar(30)

-- uniform random delay of 0 - 0.3 second; avg = 0.15
select @delaytime = '00:00:0' + cast(cast((rand()*0.30) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

select @screen_data = "

-- get customer info and update balances

select
    @d_street_1 = 'rqSHHakqyV',
    @d_street_2 = 'zZ98nW3BR2s',
    @d_city      = 'ArNr4GNFV9',
    @d_state     = 'aV',
    @d_zip       = '453511111'

-- get warehouse data and update year-to-date

select
    @w_street_1 = 'rqSHHakqyV',
    @w_street_2 = 'zZ98nW3BR2s',
    @w_city      = 'ArNr4GNFV9',
    @w_state     = 'aV',
    @w_zip       = '453511111'

select
    @c_id        = 123,
    @c_balance   = -10000.00,
    @c_first     = 'KmR03Xureb',
    @c_middle    = 'OE',
    @c_last      = 'BAROUGHTBAR',
    @c_street_1  = 'QpGdOHjv8mR9vNI8V',
    @c_street_2  = 'dzKoCOBqbc3yu',
    @c_city      = 'zAKZXdc037FQxq',
    @c_state     = 'QA',
    @c_zip       = '700311111',
    @c_phone     = '2967264064528555',
    @c_credit    = 'GC',
    @c_credit_lim = 50000.00,
    @c_discount  = 0.3069,
    @c_since     = getdate(),
    @datetime    = getdate()

-- return data to client

select @c_id,
       @c_last,
       @datetime,
       @w_street_1,
       @w_street_2,
       @w_city,
       @w_state,
       @w_zip,
       @d_street_1,
       @d_street_2,
       @d_city,
       @d_state,
       @d_zip,
       @c_first,
       @c_middle,
       @c_street_1,
       @c_street_2,
       @c_city,
       @c_state,
       @c_zip,
       @c_phone,
       @c_since,
       @c_credit,
       @c_credit_lim,
       @c_discount,
       @c_balance,
       @screen_data

```

```

GO

create proc tpcc_stocklevel      @w_id          smallint,
                                @d_id          tinyint,
                                @threshold     smallint
as
declare @delaytime varchar(30)

-- uniform random delay of 0 - 3.6 second; avg = 1.8
select @delaytime = '00:00:0' + cast(cast((rand()*3.60) as decimal(4,3)) as
char(5))
waitfor delay @delaytime

select 49

GO

create proc tpcc_version
as
declare @version char(8)

begin
select @version = '4.10.000'
select @version as 'Version'
end

GO

CREATE TABLE order_line_null (
    [ol_i_id] [int] NOT NULL ,
    [ol_supply_w_id] [smallint] NOT NULL ,
    [ol_delivery_d] [datetime] NOT NULL ,
    [ol_quantity] [smallint] NOT NULL ,
    [ol_amount] [numeric](6, 2) NOT NULL
) ON [PRIMARY]
GO

insert into order_line_null values ( 101, 1, getdate(), 1, 123.45 )
insert into order_line_null values ( 102, 1, getdate(), 2, 123.45 )
insert into order_line_null values ( 103, 1, getdate(), 3, 123.45 )
insert into order_line_null values ( 104, 1, getdate(), 4, 123.45 )
insert into order_line_null values ( 105, 1, getdate(), 5, 123.45 )
insert into order_line_null values ( 106, 1, getdate(), 1, 123.45 )
insert into order_line_null values ( 107, 1, getdate(), 2, 123.45 )
insert into order_line_null values ( 108, 1, getdate(), 3, 123.45 )
insert into order_line_null values ( 109, 1, getdate(), 4, 123.45 )
insert into order_line_null values ( 110, 1, getdate(), 5, 123.45 )
insert into order_line_null values ( 111, 1, getdate(), 1, 123.45 )
insert into order_line_null values ( 112, 1, getdate(), 2, 123.45 )
insert into order_line_null values ( 113, 1, getdate(), 3, 123.45 )
insert into order_line_null values ( 114, 1, getdate(), 4, 123.45 )
insert into order_line_null values ( 115, 1, getdate(), 5, 123.45 )

GO

```

Appendix B: Database Design

Database Build

backup.sql

```
-- File: BACKUP.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates backup of tpcc database

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

dump database tpcc to tpccback1, tpccback2, tpccback3, tpccback4 with init,
stats = 1

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

Go

backupdev.sql

```
-- File: BACKUPDEVB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates tpcc database Backup Devices

use master
go

-- create backup devices

exec sp_addumpdevice 'disk','tpccback1','Y:\tpccback1.dmp'
go
exec sp_addumpdevice 'disk','tpccback2','Z:\tpccback2.dmp'
go
exec sp_addumpdevice 'disk','tpccback3','Y:\tpccback3.dmp'
go
exec sp_addumpdevice 'disk','tpccback4','Z:\tpccback4.dmp'
Go
```

createdb.sql

```
-- File: CREATEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates tpcc database and backup files

use master
go

-- Create temporary table for timing

if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer

go
```

```
create table tpcc_timer
(
    start_date char(30),
    end_date char(30)
)

insert into tpcc_timer values (0,0)
go

-- Store starting time

update tpcc_timer
set start_date = (select convert(char(30), getdate(),9))
go

-- create main database files

CREATE DATABASE tpcc
ON PRIMARY
(
    NAME = MSSQL_tpcc_root,
    FILENAME = "Y:\MSSQL_tpcc_root.mdf",
    SIZE = 8MB,
    FILEGROWTH =0),
FILEGROUP MSSQL_misc_fg
(
    NAME = MSSQL_misc1,
    FILENAME = "F:",
    SIZE = 130000MB,
    FILEGROWTH = 0),
FILEGROUP MSSQL_cs_fg
(
    NAME = MSSQL_cs1,
    FILENAME = "G:",
    SIZE = 75000MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_cs2,
    FILENAME = "H:",
    SIZE = 55000MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_cs3,
    FILENAME = "I:",
    SIZE = 75000MB,
    FILEGROWTH = 0),
(
    NAME = MSSQL_cs4,
    FILENAME = "J:",
    SIZE = 55000MB,
    FILEGROWTH = 0)
LOG ON
(
    NAME =MSSQL_tpcc_log,
    FILENAME = "E:",
    SIZE = 120000MB,
    FILEGROWTH =0)
COLLATE Latin1_General_BIN
go

-- Store ending time
update tpcc_timer
set end_date = (select convert(char(30), getdate(),9))
go

select "Elapsed time (in seconds): ", datediff(second,(select start_date from
tpcc_timer),(select end_date from tpcc_timer))

-- remove temporary table

if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer

go
```

dbopt1.sql

```
-- File: DBOPT1.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Sets database options for data load
```

```
use master
go
```

```
exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
exec sp_dboption tpcc,'torn page detection',false
go
```

```
use tpcc
go
```

```
checkpoint
Go
```

dbopt2.sql

```
-- File: DBOPT2.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Resets database options after data load
```

```
sp_dboption tpcc,'select into/bulkcopy',FALSE
GO
```

```
sp_dboption tpcc,'trunc. log on chkpt.',FALSE
GO
```

```
USE tpcc
GO
```

```
CHECKPOINT
GO
```

```
sp_configure 'allow updates',1
GO
```

```
RECONFIGURE WITH OVERRIDE
GO
```

```
DECLARE @msg varchar(50)
```

```
--
-- OPTIONS FOR SQL SERVER 8.0 --
-- Set option values for user-defined indexes --
--
```

```
SET @msg = ''
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ''
PRINT @msg
```

```
EXEC sp_indexoption 'customer', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'district', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'warehouse', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'stock', 'DisallowPageLocks', TRUE
```

```
EXEC sp_indexoption 'order_line', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'orders', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'new_order', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowPageLocks', TRUE
GO
```

```
Print ''
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print ' Lockflag = 0 ==> No pre-specified hierarchy'
Print ' Lockflag = 1 ==> Lock at Page-level then Table-level'
Print ' Lockflag = 2 ==> Lock at Row-level then Table-level'
Print ' Lockflag = 3 ==> Lock at Table-level'
Print ''
```

```
SELECT name,lockflags
FROM sysindexes
WHERE object_id('warehouse') = id OR
object_id('district') = id OR
object_id('customer') = id OR
object_id('stock') = id OR
object_id('orders') = id OR
object_id('order_line')= id OR
object_id('history') = id OR
object_id('new_order') = id OR
object_id('item') = id
ORDER BY lockflags asc
GO
```

```
sp_configure 'allow updates',0
GO
```

```
RECONFIGURE WITH OVERRIDE
GO
```

```
EXEC sp_dboption tpcc, 'auto update statistics',FALSE
EXEC sp_dboption tpcc, 'auto create statistics', FALSE
GO
```

```
EXEC sp_tableoption 'district', 'pintable',true
EXEC sp_tableoption 'warehouse', 'pintable',true
EXEC sp_tableoption 'new_order', 'pintable',true
EXEC sp_tableoption 'item', 'pintable',true
GO
```

idxcuscl.sql

```
-- File: IDXCUSCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on customer table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'customer_cl' )
```

```

drop index customer.customer_c1

create unique clustered index customer_c1 on customer(c_w_id, c_d_id, c_id)
on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxcusnc.sql

```

-- File:  IDXCUSNC.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates non-clustered index on customer table

use tpc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_nc1' )
drop index customer.customer_nc1

create unique nonclustered index customer_nc1 on customer(c_w_id, c_d_id,
c_last, c_first, c_id)
on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxdiscl.sql

```

-- File:  IDXDISCL.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates clustered index on district table

use tpc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'district_c1' )
drop index district.district_c1

create unique clustered index district_c1 on district(d_w_id, d_id)
with fillfactor=100 on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

```

go

idxitmcl.sql

```

-- File:  IDXITMCL.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates clustered index on item table

use tpc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'item_c1' )
drop index item.item_c1

create unique clustered index item_c1 on item(i_id)
on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxnodcl.sql

```

-- File:  IDXNODCL.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose:  Creates clustered index on new_order table

use tpc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'new_order_c1' )
drop index new_order.new_order_c1

create unique clustered index new_order_c1 on new_order(no_w_id, no_d_id,
no_o_id)
on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxodlcl.sql

```

-- File:  IDXODLCL.SQL

```

```

-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on order_line table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'order_line_c1' )
    drop index order_line.order_line_c1

create unique clustered index order_line_c1 on order_line(ol_w_id, ol_d_id,
ol_o_id, ol_number)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxordcl.sql

```

-- File:  IDXORDCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on orders table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_c1' )
    drop index orders.orders_c1

create unique clustered index orders_c1 on orders(o_w_id, o_d_id, o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxordnc.sql

```

-- File:  IDXORDNC.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates non-clustered index on orders table

use tpcc
go

```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_nc1' )
    drop index orders.orders_nc1

create index orders_nc1 on orders(o_w_id, o_d_id, o_c_id, o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxstkcl.sql

```

-- File:  IDXSTKCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on stock table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'stock_c1' )
    drop index stock.stock_c1

create unique clustered index stock_c1 on stock(s_i_id, s_w_id)
    on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

idxwarcl.sql

```

-- File:  IDXWARCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on warehouse table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'warehouse_c1' )
    drop index warehouse.warehouse_c1

create unique clustered index warehouse_c1 on warehouse(w_id)

```

```
with fillfactor=100 on MSSQL_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

removedb.sql

```
-- File:   REMOVEDB.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose: Removes tpcc database and backup files
```

```
use master
go
```

```
-- remove any existing database and backup files
```

```
exec sp_dbremove tpcc, dropdev
go
```

```
exec sp_dropdevice 'tpcback1'
exec sp_dropdevice 'tpcback2'
exec sp_dropdevice 'tpcback3'
exec sp_dropdevice 'tpcback4'
go
```

restore.sql

```
-- File:   RESTORE.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose: Loads database backup from backup files
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
--select "Start date:", convert(varchar(30),@startdate,9)
```

```
load database tpcc from tpcback1, tpcback2, tpcback3, tpcback4 with stats
= 1
```

```
select @enddate = getdate()
--select "End date: ", convert(varchar(30),@enddate,9)
--select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

RunSQLCfg.sql

```
/* TPC-C Benchmark Kit */
/*                               */
/* RUNSQLCFG.SQL                 */
/*                               */
/* This script file is used to set runtime server configuration parameters */
/*                               */
```

```
exec sp_configure "show advanced option", 1
```

```
go
```

```
reconfigure with override
```

```
go
```

```
/* change this value to approximately the number of connected users */
exec sp_configure "max worker threads",240
```

```
/* increase priority of user threads */
exec sp_configure "priority boost",1
```

```
/* disable automatic checkpointing */
exec sp_configure "recovery interval",56
```

```
/* change to a mask appropriate for the number of processors on the server */
exec sp_configure "affinity mask",0x7
```

```
/* enable fibers */
exec sp_configure "lightweight pooling",1
```

```
/* enable update */
exec sp_configure "allow updates",1
```

```
/* set max degree of parallelism */
exec sp_configure "max degree of parallelism",1
```

```
go
```

```
reconfigure with override
```

```
go
```

sqlshutdown.sql

```
use tpcc
go
checkpoint
go
shutdown
go
```

tables.sql

```
-- File:   TABLES.SQL
--       Microsoft TPC-C Benchmark Kit Ver. 4.22
--       Copyright Microsoft, 2001
-- Purpose: Creates TPC-C tables
```

```
use tpcc
go
```

```
--
-- Remove all existing TPC-C tables
--
```

```
if exists ( select name from sysobjects where name = 'warehouse' )
drop table warehouse
```

```
go
if exists ( select name from sysobjects where name = 'district' )
drop table district
```

```
go
if exists ( select name from sysobjects where name = 'customer' )
drop table customer
```

```
go
if exists ( select name from sysobjects where name = 'history' )
```

```

drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )
drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
drop table stock
go
--
-- Create new tables
--

create table warehouse
(
    w_id                smallint,
    w_name              char(10),
    w_street_1          char(20),
    w_street_2          char(20),
    w_city              char(20),
    w_state             char(2),
    w_zip              char(9),
    w_tax              numeric(4,4),
    w_ytd              numeric(12,2)
) on MSSQL_misc_fg
go

create table district
(
    d_id                tinyint,
    d_w_id              smallint,
    d_name              char(10),
    d_street_1          char(20),
    d_street_2          char(20),
    d_city              char(20),
    d_state             char(2),
    d_zip              char(9),
    d_tax              numeric(4,4),
    d_ytd              numeric(12,2),
    d_next_o_id        int
) on MSSQL_misc_fg
go

create table customer
(
    c_id                int,
    c_d_id              tinyint,
    c_w_id              smallint,
    c_first             char(16),
    c_middle            char(2),
    c_last              char(16),
    c_street_1          char(20),
    c_street_2          char(20),
    c_city              char(20),
    c_state             char(2),
    c_zip              char(9),
    c_phone            char(16),
    c_since             datetime,
    c_credit            char(2),

```

```

    c_credit_lim        numeric(12,2),
    c_discount          numeric(4,4),
    c_balance           numeric(12,2),
    c_ytd_payment      numeric(12,2),
    c_payment_cnt      smallint,
    c_delivery_cnt     smallint,
    c_data              char(500)
) on MSSQL_cs_fg
go

create table history
(
    h_c_id              int,
    h_c_d_id            tinyint,
    h_c_w_id            smallint,
    h_d_id              tinyint,
    h_w_id              smallint,
    h_date              datetime,
    h_amount            numeric(6,2),
    h_data              char(24)
) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id             int,
    no_d_id             tinyint,
    no_w_id             smallint
) on MSSQL_misc_fg
go

create table orders
(
    o_id                int,
    o_d_id              tinyint,
    o_w_id              smallint,
    o_c_id              int,
    o_entry_d           datetime,
    o_carrier_id        tinyint,
    o_ol_cnt            tinyint,
    o_all_local         tinyint
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id             int,
    ol_d_id             tinyint,
    ol_w_id             smallint,
    ol_number           tinyint,
    ol_i_id             int,
    ol_supply_w_id      smallint,
    ol_delivery_d        datetime,
    ol_quantity         smallint,
    ol_amount           numeric(6,2),
    ol_dist_info        char(24)
) on MSSQL_misc_fg
go

create table item
(
    i_id                int,
    i_im_id             int,
    i_name              char(24),
    i_price             numeric(5,2),
    i_data              char(50)
) on MSSQL_misc_fg
go

```



```

create table stock
(
    s_i_id                int,
    s_w_id                smallint,
    s_quantity            smallint,
    s_dist_01             char(24),
    s_dist_02             char(24),
    s_dist_03             char(24),
    s_dist_04             char(24),
    s_dist_05             char(24),
    s_dist_06             char(24),
    s_dist_07             char(24),
    s_dist_08             char(24),
    s_dist_09             char(24),
    s_dist_10             char(24),
    s_ytd                 int,
    s_order_cnt            smallint,
    s_remote_cnt          smallint,
    s_data                 char(50)
) on MSSQL_cs_fg
go

```

Verify_TpccLoad.sql

```

-- File:  VERIFYTPCCLOAD.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Performs series of TPCC database checks to verify
--           that database load completed correctly

print  " "
select convert(char(30), getdate(),9)
print  " "

use tpcc
go

-- *****
--
-- Check rows per table from SYSINDEXES
--
-- *****

print  'WAREHOUSE TABLE'

select rows
from sysindexes
where id = object_id("warehouse")
go

print  'DISTRICT TABLE = (10 * No of warehouses)'

select rows
from sysindexes
where id =object_id("district")
go

print  'ITEM TABLE = 100,000'

select rows
from sysindexes
where id =object_id("item")
go

print  'CUSTOMER TABLE = (30,000 * No of warehouses)'

```

```

select rows
from sysindexes
where id =object_id("customer")
go

print 'ORDERS TABLE = (30,000 * No of warehouses)'

select rows
from sysindexes
where id =object_id("orders")
go

print  'HISTORY TABLE = (30,000 * No of warehouses)'

select rows
from sysindexes
where id =object_id("history")
go

print  'STOCK TABLE = (100,000 * No of warehouses)'

select rows
from sysindexes
where id =object_id("stock")
go

print  'ORDER_LINE TABLE = (300,000 * No of warehouses + some
change)'

select rows
from sysindexes
where id =object_id("order_line")
go

print  'NEW_ORDER TABLE = (9000 * No of warehouses)'

select rows
from sysindexes
where id =object_id("new_order")
go

-- *****
--
-- Check indices
--
-- *****

print '*****Index Check*****'

use tpcc
go

sp_helpindex customer
go

sp_helpindex stock
go

sp_helpindex district
go

sp_helpindex item
go

sp_helpindex new_order
go

sp_helpindex orders

```

```

go

sp_helpindex      order_line
go

sp_helpindex      warehouse
go

```

version.sql

```

-- File:  VERSION.SQL
--      Microsoft TPC-C Benchmark Kit Ver. 4.22
--      Copyright Microsoft, 2001
-- Purpose: Returns version level of TPC-C stored procs
-- Note:   Always update the return value of this proc for
--         any interface changes or "must have" bug fixes.
--
-- The value returned by this SP defines the "interface level",
-- which must match between the stored procs and the client code.
-- The interface level may be down rev from the current kit. This
-- indicates that the interface hasn't changed since that version.

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_version" )
    drop procedure tpcc_version
go

create proc tpcc_version
as
declare    @version char(8)

begin
    select @version = "4.10.000"
    select @version as "Version"
end

go

```

Load Source Code

getargs.c

```

//      File:          GETARGS.C
//                  Microsoft TPC-C Kit Ver. 4.22
//                  Copyright Microsoft, 1996, 1997,
//                  1998, 1999, 2000, 2001
//      Purpose:   Source file for command line processing

// Includes
#include "tpcc.h"

//=====
//
// Function name: GetArgsLoader
//
//=====

void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{

```

```

    int          i;
    char        *ptr;

#ifdef DEBUG
    printf("[%d]DBG: Entering GetArgsLoader()\n", (int)
GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server          = SERVER;
    pargs->user            = USER;
    pargs->password        = PASSWORD;
    pargs->database        = DATABASE;
    pargs->batch           = BATCH;
    pargs->num_warehouses  = UNDEF;
    pargs->tables_all      = TRUE;
    pargs->table_item      = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer  = FALSE;
    pargs->table_orders    = FALSE;
    pargs->loader_res_file =
    LOADER_RES_FILE;
    pargs->pack_size       = DEFLDPPACKSIZE;
    pargs->starting_warehouse =
    DEF_STARTING_WAREHOUSE;
    pargs->build_index     = BUILD_INDEX;
    pargs->index_order     = INDEX_ORDER;
    pargs->index_script_path = INDEX_SCRIPT_PATH;
    pargs->scale_down      = SCALE_DOWN;

    /* check for zero command line args */
    if ( argc == 1 )
        GetArgsLoaderUsage();

    for ( i = 1; i < argc; ++i )
    {
        if (argv[i][0] != '-' && argv[i][0] != '/')
        {
            printf("\nUnrecognized command");
            GetArgsLoaderUsage();
            exit(1);
        }

        ptr = argv[i];

        switch (ptr[1])
        {
            case 'h': /* Fall through */
            case 'H':
                GetArgsLoaderUsage();
                break;

            case 'D':
                pargs->database = ptr+2;
                break;

            case 'P':
                pargs->password = ptr+2;
                break;

            case 'S':
                pargs->server = ptr+2;
                break;

            case 'U':
                pargs->user = ptr+2;
                break;
        }
    }
}

```

<pre> case 'b': pargs->batch = atol(ptr+2); break; case 'W': pargs->num_warehouses = atol(ptr+2); break; case 's': pargs->starting_warehouse = atol(ptr+2); break; case 't': { pargs->tables_all = FALSE; if (strcmp(ptr+2,"item") == 0) pargs->table_item = TRUE; else if (strcmp(ptr+2,"warehouse") == 0) pargs->table_warehouse = TRUE; else if (strcmp(ptr+2,"customer") == 0) pargs->table_customer = TRUE; else if (strcmp(ptr+2,"orders") == 0) pargs->table_orders = TRUE; else { printf("\nUnrecognized command"); GetArgsLoaderUsage(); exit(1); } break; } case 'f': pargs->loader_res_file = ptr+2; break; case 'p': pargs->pack_size = atol(ptr+2); break; case 'i': pargs->build_index = atol(ptr+2); break; case 'o': pargs->index_order = atol(ptr+2); break; case 'c': pargs->scale_down = atol(ptr+2); break; case 'd': pargs->index_script_path = ptr+2; break; </pre>	<pre> default: GetArgsLoaderUsage(); exit(-1); break; } } /* check for required args */ if (pargs->num_warehouses == UNDEF) { printf("Number of Warehouses is required\n"); exit(-2); } return; } ===== // // Function name: GetArgsLoaderUsage // ===== void GetArgsLoaderUsage() { #ifdef DEBUG printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId()); #endif printf("TPCCLDR:\n\n"); printf("Parameter Default\n"); printf("-----\n"); printf("-W Number of Warehouses to Load Required\n"); printf("-S Server %s\n", SERVER); printf("-U Username %s\n", USER); printf("-P Password %s\n", PASSWORD); printf("-D Database %s\n", DATABASE); printf("-b Batch Size %ld\n", (long) BATCH); printf("-p TDS packet size %ld\n", (long) DEFLDPACKSIZE); printf("-f Loader Results Output Filename %s\n", LOADER_RES_FILE); printf("-s Starting Warehouse %ld\n", (long) DEF_STARTING_WAREHOUSE); printf("-i Build Option (data = 0, data and index = 1) %ld\n", (long) BUILD_INDEX); printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n", (long) INDEX_ORDER); printf("-c Build Scaled Database (normal = 0, tiny = 1) %ld\n", (long) SCALE_DOWN); printf("-d Index Script Path %s\n", INDEX_SCRIPT_PATH); printf("-t Table to Load all tables\n"); printf(" [item warehouse customer orders]\n"); printf(" Notes: \n"); printf(" - the '-t' parameter may be included multiple times to \n"); printf(" specify multiple tables to be loaded \n"); printf(" - 'item' loads ITEM table \n"); printf(" - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n"); </pre>
--	--

```

printf(" - 'customer' loads CUSTOMER and HISTORY tables \n");
printf(" - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables
\n");

printf("\nNote: Command line switches are case sensitive.\n");

exit(0);
}

```

random.c

```

// File: RANDOM.C
// Microsoft TPC-C Kit Ver. 4.22
// Copyright Microsoft, 1996, 1997,
1998, 1999, 2000, 2001
// Purpose: Random number generation routines for database loader

```

```

// Includes
#include "tpcc.h"
#include "math.h"

```

```

// Defines
#define A 16807
#define M 2147483647
#define Q 127773 /* M div A */
#define R 2836 /* M mod A */
#define Thread __declspec(thread)

```

```

// Globals
long Thread Seed = 0; /* thread local seed */

```

```

/*****
*****
* random -
* Implements a GOOD pseudo random number generator. This generator
* will/should? run the complete period before repeating.
* Copied from:
* Random Numbers Generators: Good Ones Are Hard to Find.
* Communications of the ACM - October 1988 Volume 31 Number 10
* Machine Dependencies:
* long must be 2 ^ 31 - 1 or greater.
*****
*****/

```

```

/*****
*****
* seed - load the Seed value used in irand and drand. Should be used before *
* first call to irand or drand.
*****
*****/

```

```

void seed(long val)
{

```

```

#ifdef DEBUG
printf("[%d]DBG: Entering seed(...\n", (int) GetCurrentThreadId());
printf("Old Seed %ld New Seed %ld\n", Seed, val);
#endif

```

```

if ( val < 0 )

```

```

val = abs(val);

```

```

Seed = val;
}

```

```

/*****
*****
* irand - returns a 32 bit integer pseudo random number with a period of *
* 1 to 2 ^ 32 - 1.
* parameters:
* none.
* returns:
* 32 bit integer - defined as long ( see above ).
* side effects:
* seed get recomputed.
*****/

```

```

long irand()
{

```

```

register long s; /* copy of seed */
register long test; /* test flag */
register long hi; /* tmp value for speed */
register long lo; /* tmp value for speed */

```

```

#ifdef DEBUG
printf("[%d]DBG: Entering irand(...\n", (int) GetCurrentThreadId());
#endif

```

```

s = Seed;
hi = s / Q;
lo = s % Q;

```

```

test = A * lo - R * hi;
if ( test > 0 )

```

```

Seed = test;

```

```

else

```

```

Seed = test + M;

```

```

return( Seed );
}

```

```

/*****
*****
* drand - returns a double pseudo random number between 0.0 and 1.0. *
* See irand.
*****/

```

```

double drand()
{

```

```

#ifdef DEBUG
printf("[%d]DBG: Entering drand(...\n", (int) GetCurrentThreadId());
#endif

```

```

return( (double) irand() / 2147483647.0);
}

```

```

//=====
// Function : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%d]DBG: Entering RandomNumber()...\n", (int)
GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd
08-13-96 perf enhancement */

#ifdef DEBUG
    printf("[%d]DBG: RandomNumber between %d & %d ==> %d\n",
(int) GetCurrentThreadId(), lower,
upper, rand_num);
#endif

    return rand_num;
}

#if 0
//Original code pgd 08/13/96

long RandomNumber(long lower,
                    long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%d]DBG: Entering RandomNumber()...\n", (int)
GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper -
lower : upper);

#ifdef DEBUG
    printf("[%d]DBG: RandomNumber between %d & %d ==> %d\n",
(int) GetCurrentThreadId(), lower,
upper, rand_num);
#endif
#endif

```

```

        return rand_num;
    }
#endif

//=====
// Function : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%d]DBG: Entering NURand()...\n", (int) GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) %
(y-x+1))+x;

#ifdef DEBUG
    printf("[%d]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(),
rand_num);
#endif

    return rand_num;
}

```

strings.c

```

// File: STRINGS.C
// Microsoft TPC-C Kit Ver. 4.22
// Copyright Microsoft, 1996, 1997,
1998, 1999, 2000, 2001
// Purpose: Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
//
// Function name: MakeAddress
//
//=====
void MakeAddress(char *street_1,
                char *street_2,
                char *city,
                char *state,
                char *zip)
{
#ifdef DEBUG
    printf("[%d]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

```

```

MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
MakeAlphaString (10, 20, ADDRESS_LEN, city);
MakeAlphaString ( 2, 2, STATE_LEN, state);
MakeZipNumberString( 9, 9, ZIP_LEN, zip);

#ifdef DEBUG
printf("[%d]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state:
%s, zip: %s\n",
                (int) GetCurrentThreadId(), street_1, street_2,
city, state, zip);
#endif

return;
}

//=====
//
// Function name: LastName
//
//=====

void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR", "OUGHT", "ABLE", "PRI", "PRES",
        "ESE", "ANTI", "CALLY", "ATION", "EING"
    };

#ifdef DEBUG
printf("[%d]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

if ((num >= 0) && (num < 1000))
{
    strcpy(name, n[(num/100)%10]);
    strcat(name, n[(num/10)%10]);
    strcat(name, n[(num/1)%10]);

    if (strlen(name) < LAST_NAME_LEN)
    {
        PaddString(LAST_NAME_LEN, name);
    }
}
else
{
    printf("\nError in LastName()... num <%d> out of range
(0,999)\n", num);
    exit(-1);
}

#ifdef DEBUG
printf("[%d]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
                (int) GetCurrentThreadId(), num, num/100,
(num/10)%10, num%10);
printf("[%d]DBG: LastName: String = %s\n", (int)
GetCurrentThreadId(), name);
#endif

return;

```

```

}

//=====
//
// Function name: MakeAlphaString
//
//=====

//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x,
maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a
minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
//--CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
printf("[%d]DBG: Entering MakeAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
    {
        cc = chArray[RandomNumber(0, chArrayMax)];
        str[i] = cc;
    }
    if ( len < z )
        memset(str+len, ' ', z - len);
    str[len] = 0;

    return len;
}

//=====
//
// Function name: MakeOriginalAlphaString
//
//=====

int MakeOriginalAlphaString(int x,
                            int y,
                            int z,

```

```

char *str,
int percent)
{
    int len;
    int val;
    int start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage:
%d\n", percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if ((x + y) <= 8)
    {
        printf("MakeOriginalAlphaString: string length must be
>= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strcpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
(int) GetCurrentThreadId(), str);
#endif

    return strlen(str);
}

=====
//
// Function name: MakeNumberString
//
=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16,
16, 16, string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));
}

```

```

str[16] = 0;

return 16;
}

=====
//
// Function name: MakeZipNumberString
//
=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9,
9, 9, string)

    strcpy(str, "000011111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

=====
//
// Function name: InitString
//
=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, '\'', len);
    str[len] = 0;
}

=====
//
// Function name: InitAddress
//
// Description:
//
=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char
*zip)
{
    memset(street_1, '\'', ADDRESS_LEN+1);
    memset(street_2, '\'', ADDRESS_LEN+1);
    memset(city, '\'', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;
}

```

```

        memset(state, '', STATE_LEN+1);
state[STATE_LEN+1] = 0;

        memset(zip, '', ZIP_LEN+1);
zip[ZIP_LEN+1] = 0;
}

//=====
//
// Function name: PaddString
//
//=====

void PaddString(int max, char *name)
{
    int        len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, '', max - len);
    name[max] = 0;

    return;
}

```

time.c

```

//      File:          TIME.C
//
//      Microsoft TPC-C Kit Ver. 4.22
//      Copyright Microsoft, 1996, 1997,
1998, 1999, 2000, 2001
//      Purpose:   Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
//
// Function name: TimeNow
//
//=====

long TimeNow()
{
    long        time_now;
    struct      _timeb el_time;

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

tpcc.h

```

//      File:          TPCC.H
//
//      Microsoft TPC-C Kit Ver. 4.22
//      Copyright Microsoft, 1996, 1997,
1998, 1999, 2000, 2001
//      Purpose:   Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER        "4.22"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

// General constants
#define MILLI                1000
#define FALSE                0
#define TRUE                 1
#define UNDEF                -1
#define MINPRINTASCII       32
#define MAXPRINTASCII       126

// Default environment constants
#define SERVER                ""
#define DATABASE              "tpcc"
#define USER                  "sa"
#define PASSWORD              ""

// Default loader arguments
#define BATCH                 10000
#define DEFLDPACKSIZE        32768
#define LOADER_RES_FILE      "logs\load.out"
#define LOADER_NURAND_C      123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX          1
// build both data and indexes
#define INDEX_ORDER          1
// build indexes before load
#define SCALE_DOWN           0
// build a normal scale database
#define INDEX_SCRIPT_PATH    "scripts"

typedef struct
{
    char        *server;
    char        *database;
    char        *user;
    char        *password;
    BOOL        tables_all;
}

// set if loading all tables

```



```

        BOOL                                table_item;
// set if loading ITEM table specifically
        BOOL                                table_warehouse;
set if loading WAREHOUSE, DISTRICT, and STOCK
        BOOL                                table_customer;
// set if loading CUSTOMER and HISTORY
        BOOL                                table_orders;
// set if loading NEW-ORDER, ORDERS, ORDER-LINE
long      num_warehouses;
long      batch;
long      verbose;
        long      pack_size;
        char      *loader_res_file;
        char      *synch_servername;
        long      case_sensitivity;
        long      starting_warehouse;
        long      build_index;
        long      index_order;
        long      scale_down;
        char      *index_script_path;
} TPCCldr_ARGS;

// String length constants
#define SERVER_NAME_LEN      20
#define DATABASE_NAME_LEN   20
#define USER_NAME_LEN       20
#define PASSWORD_LEN        20
#define TABLE_NAME_LEN    20
#define I_DATA_LEN          50
#define I_NAME_LEN          24
#define BRAND_LEN           1
#define LAST_NAME_LEN       16
#define W_NAME_LEN          10
#define ADDRESS_LEN         20
#define STATE_LEN           2
#define ZIP_LEN              9
#define S_DIST_LEN          24
#define S_DATA_LEN          50
#define D_NAME_LEN          10
#define FIRST_NAME_LEN      16
#define MIDDLE_NAME_LEN    2
#define PHONE_LEN           16
#define CREDIT_LEN          2
#define C_DATA_LEN          500
#define H_DATA_LEN          24
#define DIST_INFO_LEN       24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN          25
#define OL_DIST_INFO_LEN    24
#define C_SINCE_LEN
23
#define H_DATE_LEN
23
#define OL_DELIVERY_D_LEN      23
#define O_ENTRY_D_LEN         23

// Functions in random.c
void      seed();
long      irand();
double    drand();
void      WUCreate();
short     WURand();
long      RandomNumber(long lower, long upper);

// Functions in getargs.c;
void      GetArgsLoader();

```

```

void      GetArgsLoaderUsage();
// Functions in time.c
long      TimeNow();
// Functions in strings.c
void      MakeAddress();
void      LastName();
int       MakeAlphaString();
int       MakeOriginalAlphaString();
int       MakeNumberString();
int       MakeZipNumberString();
void      InitString();
void      InitAddress();
void      PaddString();

```

tpccldr.c

```

// File: TPCCLDR.C
// Microsoft TPC-C Kit Ver. 4.22
// Copyright Microsoft, 2000, 2001
// Purpose: Source file for TPC-C database loader

// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS      100000
#define MAXITEMS_SCALE_DOWN      100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);

void CheckSQL();
void CheckDataBase();

long NURand();
void LoadItem();
void LoadWarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();

```

```

void CheckForCommit();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures

typedef struct
{
    long        ol;
    long        ol_i_id;
    short       ol_supply_w_id;
    short       ol_quantity;
    double      ol_amount;
    char        ol_dist_info[DIST_INFO_LEN+1];
    char
ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long        o_id;
    short       o_d_id;
    short       o_w_id;
    long        o_c_id;
    short       o_carrier_id;
    short       o_ol_cnt;
    short       o_all_local;
    ORDER_LINE_STRUCT  o_ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long
short
short
char
char
char
char
char
char
char
char
char
double
double
// fix to avoid ODBC float to numeric conversion problem.
// double
char
double
short
short
char
char
double
char
} CUSTOMER_STRUCT;

typedef struct
{
    char
c_last[LAST_NAME_LEN+1];
c_street_1[ADDRESS_LEN+1];
c_street_2[ADDRESS_LEN+1];
c_city[ADDRESS_LEN+1];
c_state[STATE_LEN+1];
c_zip[ZIP_LEN+1];
c_phone[PHONE_LEN+1];
c_credit[CREDIT_LEN+1];
double
double
// double
char
double
short
short
char
char
double
char
} CUSTOMER_STRUCT;

typedef struct
{
    char
c_last[LAST_NAME_LEN+1];
    char
c_first[FIRST_NAME_LEN+1];
    char
c_middle[MIDDLE_NAME_LEN+1];
    char
c_last[LAST_NAME_LEN+1];
    char
c_street_1[ADDRESS_LEN+1];
    char
c_street_2[ADDRESS_LEN+1];
    char
c_city[ADDRESS_LEN+1];
    char
c_state[STATE_LEN+1];
    char
c_zip[ZIP_LEN+1];
    char
c_phone[PHONE_LEN+1];
    char
c_credit[CREDIT_LEN+1];
    double
c_credit_lim;
    double
c_discount;
    // double
c_balance;
    char
c_balance[6];
    double
c_ytd_payment;
    short
c_payment_cnt;
    short
c_delivery_cnt;
    char
c_data[C_DATA_LEN+1];
    double
h_amount;
    char
h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

char
c_first[FIRST_NAME_LEN+1];
long
} CUSTOMER_SORT_STRUCT;
c_id;

typedef struct
{
    long
time_start;
} LOADER_TIME_STRUCT;

// Global variables

char
szLastError[300];

HENV
henv;

HDBC
v_hdbc;
//
for SQL Server version verification
HDBC
i_hdbc1;
// for ITEM
table
HDBC
w_hdbc1;
// for
WAREHOUSE, DISTRICT, STOCK
HDBC
c_hdbc1;
// for
CUSTOMER
HDBC
c_hdbc2;
// for
HISTORY
HDBC
o_hdbc1;
// for
ORDERS
HDBC
o_hdbc2;
// for
NEW-ORDER
HDBC
o_hdbc3;
// for
ORDER-LINE

HSTMT
v_hstmt;
// for SQL
Server version verification
HSTMT
i_hstmt1;
HSTMT
w_hstmt1;
HSTMT
c_hstmt1, c_hstmt2;
HSTMT
o_hstmt1, o_hstmt2, o_hstmt3;

ORDERS_STRUCT  orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long
orders_rows_loaded;
long
new_order_rows_loaded;
long
order_line_rows_loaded;
long
history_rows_loaded;
long
customer_rows_loaded;
long
stock_rows_loaded;
long
district_rows_loaded;
long
item_rows_loaded;
long
warehouse_rows_loaded;
long
main_time_start;
long
main_time_end;
long
max_items;
long
customers_per_district;
long
orders_per_district;
long
first_new_order;
long
last_new_order;

TPCCLDR_ARGS  *aptr, args;

//=====
//
// Function name: main

```

```

//
//=====
//=====

int main(int argc, char **argv)
{
    DWORD      dwThreadID[MAX_MAIN_THREADS];
    HANDLE     hThread[MAX_MAIN_THREADS];
    FILE       *fLoader;
    char       buffer[255];
    int        i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");
    printf("\n*");
    printf("\n* Microsoft SQL Server");
    printf("\n*");
    printf("\n* TPC-C BENCHMARK KIT: Database loader");
    printf("\n* Version %s", TPCKIT_VER);
    printf("\n*");

    printf("\n*****\n");

    // process command line arguments

    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    // verify database and tables exist before attempting to load

    CheckSQL();
    CheckDataBase();

    printf("Build interface is ODBC.\n");

    if (aptr->build_index == 0)
        printf("Data load only - no index creation.\n");
    else
        printf("Data load and index creation.\n");

    if (aptr->index_order == 0)
        printf("Clustered indexes will be created after bulk
load.\n");
    else
        printf("Clustered indexes will be created before bulk
load.\n");

    // set database scale values
    if (aptr->scale_down == 1)
    {
        printf("*** Scaled Down Database ***\n");
        max_items = MAXITEMS_SCALE_DOWN;
        customers_per_district =
CUSTOMERS_SCALE_DOWN;
        orders_per_district = ORDERS_SCALE_DOWN;
        first_new_order = 0;
        last_new_order = 30;
    }
    else
    {
        max_items = MAXITEMS;
        customers_per_district =
CUSTOMERS_PER_DISTRICT;
        orders_per_district = ORDERS_PER_DISTRICT;
        first_new_order = 2100;

        last_new_order = 3000;
    }

    // open connections to SQL Server

    OpenConnections();

    // open file for loader results
    fLoader = fopen(aptr->loader_res_file, "w");

    if (fLoader == NULL)
    {
        printf("Error, loader result file open failed.");
        exit(-1);
    }

    // start loading data

    sprintf(buffer, "TPC-C load started for %ld
warehouses.\n", aptr->num_warehouses);

    printf("%s", buffer);
    fprintf(fLoader, "%s", buffer);

    main_time_start = (TimeNow() / MILLI);

    // start parallel load threads

    if (aptr->tables_all || aptr->table_item)
    {
        fprintf(fLoader, "\nStarting loader threads for: item\n");

        hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadItem,
NULL,
0,
&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating thread
= 0.\n");
            exit(-1);
        }

        if (aptr->tables_all || aptr->table_warehouse)
        {
            fprintf(fLoader, "Starting loader threads for:
warehouse\n");

            hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadWarehouse,
NULL,
0,

```

```

&dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread
= 1.\n");
            exit(-1);
        }
    }
    if (aptr->tables_all || aptr->table_customer)
    {
        fprintf(fLoader, "Starting loader threads for:
customer\n");
        hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomer,
NULL,
0,
&dwThreadID[2]);
        if (hThread[2] == NULL)
        {
            printf("Error, failed in creating creating main
thread = 2.\n");
            exit(-1);
        }
    }
    if (aptr->tables_all || aptr->table_orders)
    {
        fprintf(fLoader, "Starting loader threads for: orders\n");
        hThread[3] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrders,
NULL,
0,
&dwThreadID[3]);
        if (hThread[3] == NULL)
        {
            printf("Error, failed in creating creating main
thread = 3.\n");
            exit(-1);
        }
    }
    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject(hThread[i], INFINITE
);
            CloseHandle(hThread[i]);

```

```

        hThread[i] = NULL;
    }
    }
    main_time_end = (TimeNow() / MILLI);
    sprintf(buffer, "\nTPC-C load completed successfully in %ld minutes.\n",
(main_time_end - main_time_start)/60);
    printf("%s", buffer);
    fprintf(fLoader, "%s", buffer);
    fclose(fLoader);
    SQLFreeEnv(henv);
    exit(0);
    return 0;
}
//=====
//
// Function name: LoadItem
//
//=====
void LoadItem()
{
    long        i_id;
    long        i_im_id;
    char        i_name[I_NAME_LEN+1];
    double      i_price;
    char        i_data[I_DATA_LEN+1];
    char        name[20];
    long        time_start;
    RETCODE     rc;
    DBINT       rcint;
    char        bcphint[128];
    // Seed with unique number
    seed(1);
    printf("Loading item table...\n");
    // if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitmc1");
    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);
    sprintf(name, "%s..%s", aptr->database, "item");
    rc = bcp_init(i_hdbc1, name, NULL, "logs\\item.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (i_id,
ROWS_PER_BATCH = 100000");
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(i_hdbc1);

```

```

    }

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN,
NULL, 0, 0, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, I_DATA_LEN, NULL,
0, 0, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    time_start = (TimeNow() / MILLI);

    item_rows_loaded = 0;

    for (i_id = 1; i_id <= max_items; i_id++)
    {
        i_im_id = RandomNumber(1L, 10000L);

        MakeAlphaString(14, 24, I_NAME_LEN, i_name);

        i_price = ((float) RandomNumber(100L, 10000L))/100.0;

        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data,
10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded,
"item", &time_start);
    }

    rcint = bcp_done(i_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmcl");
}

```

```

=====
//
// Function : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are
// created
//
=====

void LoadWarehouse()
{
    short   w_id;
    char    w_name[W_NAME_LEN+1];
    char    w_street_1[ADDRESS_LEN+1];
    char    w_street_2[ADDRESS_LEN+1];
    char    w_city[ADDRESS_LEN+1];
    char    w_state[STATE_LEN+1];
    char    w_zip[ZIP_LEN+1];
    double  w_tax;
    double  w_ytd;
    char    name[20];
    long    time_start;
    RETCODE rc;
    DBINT   rcint;
    char    bcphint[128];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxwardl");

    InitString(w_name, W_NAME_LEN+1);
    InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

    sprintf(name, "%s..%s", aptr->database, "warehouse");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\whouse.err", DB_IN);

    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (w_id,
ROWS_PER_BATCH = %d", aptr->num_warehouses);
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*)
bcphint);

        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN,
NULL, 0, 0, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN,
NULL, 0, 0, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN,
NULL, 0, 0, 4);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN,
NULL, 0, 0, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN,
NULL, 0, 0, 6);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0,
7);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 8);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 9);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (short)aptr->starting_warehouse; w_id <=
aptr->num_warehouses; w_id++)
{
    MakeAlphaString(6,10, W_NAME_LEN, w_name);

    MakeAddress(w_street_1, w_street_2, w_city, w_state,
w_zip);

    w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

    w_ytd = 300000.00;

    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstmt1,
warehouse_rows_loaded, "warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))

BuildIndex("idxwarc1");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();
}

//=====
//
// Function : District
//
//=====

void District()
{
    short d_id;
    short d_w_id;
    char d_name[D_NAME_LEN+1];
    char d_street_1[ADDRESS_LEN+1];
    char d_street_2[ADDRESS_LEN+1];
    char d_city[ADDRESS_LEN+1];
    char d_state[STATE_LEN+1];
    char d_zip[ZIP_LEN+1];
    double d_tax;
    double d_ytd;
    char name[20];
    long d_next_o_id;
    long time_start;
    int w_id;
    RETCODE rc;
    DBINT rcint;
    char bcpint[128];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
    sprintf(name, "%s..%s", aptr->database, "district");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\district.err", DB_IN);

    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcpint, "tablock, order (d_w_id, d_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 10));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*)
bcpint);

        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);
    }
}

```

```

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN,
NULL, 0, 0, 3);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN,
NULL, 0, 0, 4);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN,
NULL, 0, 0, 5);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN,
NULL, 0, 0, 6);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL,
0, 0, 7);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0,
8);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 9);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 10);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 11);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        d_ytd = 30000.0;

        d_next_o_id = orders_per_district+1;

        time_start = (TimeNow() / MILLI);

        for (w_id = apr->starting_warehouse; w_id <=
apr->num_warehouses; w_id++)
        {
            d_w_id = w_id;

            for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE;
d_id++)

```

```

        {
            MakeAlphaString(6,10,D_NAME_LEN,
d_name);

            MakeAddress(d_street_1, d_street_2, d_city,
d_state, d_zip);

            d_tax = ((float)
RandomNumber(0L,2000L))/10000.00;

            rc = bcp_sendrow(w_hdbc1);
            if (rc != SUCCEED)
                HandleErrorDBC(w_hdbc1);

            district_rows_loaded++;
            CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
        }
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading district table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxdiscl");

    return;
}

//=====
//
// Function : Stock
//
//=====

void Stock()
{
    long   s_i_id;
    short  s_w_id;
    short  s_quantity;
    char   s_dist_01[S_DIST_LEN+1];
    char   s_dist_02[S_DIST_LEN+1];
    char   s_dist_03[S_DIST_LEN+1];
    char   s_dist_04[S_DIST_LEN+1];
    char   s_dist_05[S_DIST_LEN+1];
    char   s_dist_06[S_DIST_LEN+1];
    char   s_dist_07[S_DIST_LEN+1];
    char   s_dist_08[S_DIST_LEN+1];
    char   s_dist_09[S_DIST_LEN+1];
    char   s_dist_10[S_DIST_LEN+1];
    long   s_ytd;
    short  s_order_cnt;
    short  s_remote_cnt;
    char   s_data[S_DATA_LEN+1];
    short  len;
    char   name[20];
    long   time_start;
    RETCODE rc;
    DBINT  rcint;
    char   bcphint[128];

```

```

// Seed with unique number
seed(3);

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxstkcl");

sprintf(name, "%s.%s", aptr->database, "stock");

rc = bcp_init(w_hdbc1, name, NULL, "logs\\stock.err", DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcpint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*)
bcpint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN,
NULL, 0, 0, 4);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN,
NULL, 0, 0, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN,
NULL, 0, 0, 6);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN,
NULL, 0, 0, 7);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN,
NULL, 0, 0, 8);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN,
NULL, 0, 0, 9);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN,
NULL, 0, 0, 10);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN,
NULL, 0, 0, 11);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN,
NULL, 0, 0, 12);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN,
NULL, 0, 0, 13);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 14);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 15);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 16);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, S_DATA_LEN,
NULL, 0, 0, 17);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;

time_start = (TimeNow() / MILLI);

printf("...Loading stock table\n");

for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (short)aptr->starting_warehouse; s_w_id
<= aptr->num_warehouses; s_w_id++)
    {
        s_quantity =
(short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_06);
    }
}

```



```

s_dist_07);
len = MakeAlphaString(24,24,S_DIST_LEN, // SQLSMALLINT
MsgLen; recnum,
s_dist_08);
len = MakeAlphaString(24,24,S_DIST_LEN, // SQLCHAR
// SQLCHAR
SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
s_dist_09);
len = MakeAlphaString(24,24,S_DIST_LEN, // SQLINTEGER
// SQLINTEGER
NativeError;
s_dist_10);
len = MakeAlphaString(24,24,S_DIST_LEN, // Seed with unique number
seed(5);
S_DATA_LEN, s_data,10);
len = MakeOriginalAlphaString(26,50,
printf("Loading customer and history tables...\n");
// if build index before load...
rc = bcp_sendrow(w_hdbc1);
if ((aptr->build_index == 1) && (aptr->index_order == 1))
BuildIndex("idxcuscl");
stock_rows_loaded++;
// Initialize bulk copy
CheckForCommit(w_hdbc1, w_hstmt1,
printf(name, "%s.%s", aptr->database, "customer");
stock_rows_loaded, "stock", &time_start);
rc = bcp_init(c_hdbc1, name, NULL, "logs\customer.err", DB_IN);
}
if (rc != SUCCEED)
HandleErrorDBC(c_hdbc1);
rcint = bcp_done(w_hdbc1);
if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
HandleErrorDBC(w_hdbc1);
printf("Finished loading stock table.\n");
sprintf(bcpint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
SQLFreeStmt(w_hstmt1, SQL_DROP);
rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcpint);
SQLDisconnect(w_hdbc1);
if (rc != SUCCEED)
HandleErrorDBC(c_hdbc1);
SQLFreeConnect(w_hdbc1);
}
// if build index after load...
sprintf(name, "%s.%s", aptr->database, "history");
if ((aptr->build_index == 1) && (aptr->index_order == 0))
BuildIndex("idxstkcl");
rc = bcp_init(c_hdbc2, name, NULL, "logs\history.err", DB_IN);
return;
if (rc != SUCCEED)
HandleErrorDBC(c_hdbc2);
}
//=====  

//=====  

//  

// Function : LoadCustomer  

//  

//=====  

//=====  

void LoadCustomer()
{
LOADER_TIME_STRUCT customer_time_start;
LOADER_TIME_STRUCT history_time_start;
short w_id;
short d_id;
DWORD
dwThreadID[MAX_CUSTOMER_THREADS];
HANDLE
hThread[MAX_CUSTOMER_THREADS];
char name[20];
RETCODE
rc;
DBINT rcint;
char
bcpint[128];
char cmd[256];
// SQLRETURN rc_1;
}
CustomerBufInit();
customer_time_start.time_start = (TimeNow() / MILLI);
history_time_start.time_start = (TimeNow() / MILLI);
for (w_id = (short)aptr->starting_warehouse; w_id <=
aptr->num_warehouses; w_id++)
{
for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE;
d_id++)
{
CustomerBufLoad(d_id, w_id);
// Start parallel loading threads here...
// Start customer table thread
printf("...Loading customer table for: d_id =
%d, w_id = %d\n", d_id, w_id);
}
}
}

```

```

        hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
0,
&dwThreadID[0]);
        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating
creating thread = 0.\n");
            exit(-1);
        }
        // Start History table thread
        printf("...Loading history table for: d_id = %d,
w_id = %d\n", d_id, w_id);
        hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
0,
&dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating
creating thread = 1.\n");
            exit(-1);
        }
        WaitForSingleObject( hThread[0], INFINITE
);
        WaitForSingleObject( hThread[1], INFINITE
);
        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing
customer thread handle with errno: %d\n", GetLastError());
        }
        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing
history thread handle with errno: %d\n", GetLastError());
        }
    }
}
// flush the bulk connection
rcint = bcp_done(c_hdbc1);

```

```

        if (rcint < 0)
            HandleErrorDBC(c_hdbc1);
        rcint = bcp_done(c_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(c_hdbc2);
        printf("Finished loading customer table.\n");
        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxcuscl");
        // build non-clustered index
        if (aptr->build_index == 1)
            BuildIndex("idxcusnc");
        // Output the NURAND used for the loader into C_FIRST for C_ID
= 1,
        // C_W_ID = 1, and C_D_ID = 1
        sprintf(cmd, "isql -S%s -U%s -P%s -d%s -e -Q"update customer set
c_first = 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1" >
logs\nurand_load.log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->database,
            LOADER_NURAND_C);
        system(cmd);
        SQLFreeStmt(c_hstmt1, SQL_DROP);
        SQLDisconnect(c_hdbc1);
        SQLFreeConnect(c_hdbc1);
        SQLFreeStmt(c_hstmt2, SQL_DROP);
        SQLDisconnect(c_hdbc2);
        SQLFreeConnect(c_hdbc2);
        return;
    }
}
//=====
//
// Function : CustomerBufInit
//
//=====
void CustomerBufInit()
{
    int i;
    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;
        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
    }
}

```

```

strcpy(customer_buf[i].c_city,"");
strcpy(customer_buf[i].c_state,"");
strcpy(customer_buf[i].c_zip,"");
strcpy(customer_buf[i].c_phone,"");
strcpy(customer_buf[i].c_credit,"");

customer_buf[i].c_credit_lim = 0;
customer_buf[i].c_discount = (float) 0;

// fix to avoid ODBC float to numeric conversion
problem.
//      customer_buf[i].c_balance = 0;
strcpy(customer_buf[i].c_balance,"");

customer_buf[i].c_ytd_payment = 0;
customer_buf[i].c_payment_cnt = 0;
customer_buf[i].c_delivery_cnt = 0;

strcpy(customer_buf[i].c_data,"");

customer_buf[i].h_amount = 0;

strcpy(customer_buf[i].h_data,"");
    }
}

//=====
//
// Function : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====

void CustomerBufLoad(int d_id, int w_id)
{
    long                i;
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C), c[i].c_last);

        MakeAlphaString(8,16,FIRST_NAME_LEN,
c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
        d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;

```

```

customer_buf[i].h_amount = 10.0;

customer_buf[i].c_ytd_payment = 10.0;

customer_buf[i].c_payment_cnt = 1;
customer_buf[i].c_delivery_cnt = 0;

// Generate CUSTOMER and HISTORY data

customer_buf[i].c_id = c[i].c_id;

strcpy(customer_buf[i].c_first, c[i].c_first);
strcpy(customer_buf[i].c_last, c[i].c_last);

customer_buf[i].c_middle[0] = 'O';
customer_buf[i].c_middle[1] = 'E';

MakeAddress(customer_buf[i].c_street_1,
            customer_buf[i].c_street_2,
            customer_buf[i].c_city,
            customer_buf[i].c_state,
            customer_buf[i].c_zip);

MakeNumberString(16, 16, PHONE_LEN,
customer_buf[i].c_phone);

if (RandomNumber(1L, 100L) > 10)
    customer_buf[i].c_credit[0] = 'G';
else
    customer_buf[i].c_credit[0] = 'B';
customer_buf[i].c_credit[1] = 'C';

customer_buf[i].c_credit_lim = 50000.0;
customer_buf[i].c_discount = ((float)
RandomNumber(0L, 5000L)) / 10000.0;

// fix to avoid ODBC float to numeric conversion
problem.
// customer_buf[i].c_balance = -10.0;
strcpy(customer_buf[i].c_balance,"-10.0");

MakeAlphaString(300, 500, C_DATA_LEN,
customer_buf[i].c_data);

// Generate HISTORY data
MakeAlphaString(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
    }
}

//=====
//
// Function : LoadCustomerTable
//
//=====

void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    int                i;
    long               c_id;
    short              c_d_id;
    short              c_w_id;
    char                c_first[FIRST_NAME_LEN+1];
    char                c_middle[MIDDLE_NAME_LEN+1];
    char                c_last[LAST_NAME_LEN+1];

```

```

char    c_street_1[ADDRESS_LEN+1];
char    c_street_2[ADDRESS_LEN+1];
char    c_city[ADDRESS_LEN+1];
char    c_state[STATE_LEN+1];
char    c_zip[ZIP_LEN+1];
char    c_phone[PHONE_LEN+1];
char    c_credit[CREDIT_LEN+1];
double  c_credit_lim;
double  c_discount;

// fix to avoid ODBC float to numeric conversion problem.
// double      c_balance;
char      c_balance[6];

double  c_ytd_payment;
short   c_payment_cnt;
short   c_delivery_cnt;
char    c_data[C_DATA_LEN+1];
char    c_since[C_SINCE_LEN+1];
RETCODE rc;

rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0,
0, 4);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0,
MIDDLE_NAME_LEN, NULL, 0, 0, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0,
0, 6);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0,
0, 7);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN,
NULL, 0, 0, 8);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0,
9);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, 10);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, 11);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0,
12);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN,
NULL, 0, SQLCHARACTER, 13);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0,
14);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 15);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 16);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

// fix to avoid ODBC float to numeric conversion problem.

// rc = bcp_bind(c_hdbc1, (BYTE *) &c_balance, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 17);
// if (rc != SUCCEEDED)
//     HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0,
SQLCHARACTER, 17);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 18);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 19);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 20);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500, NULL, 0, 0, 21);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;
}

```

```

strcpy(c_first, customer_buf[i].c_first);
strcpy(c_middle, customer_buf[i].c_middle);
strcpy(c_last, customer_buf[i].c_last);
strcpy(c_street_1, customer_buf[i].c_street_1);
strcpy(c_street_2, customer_buf[i].c_street_2);
strcpy(c_city, customer_buf[i].c_city);
strcpy(c_state, customer_buf[i].c_state);
strcpy(c_zip, customer_buf[i].c_zip);
strcpy(c_phone, customer_buf[i].c_phone);
strcpy(c_credit, customer_buf[i].c_credit);

FormatDate(&c_since);

c_credit_lim = customer_buf[i].c_credit_lim;
c_discount = customer_buf[i].c_discount;

// fix to avoid ODBC float to numeric conversion
// c_balance = customer_buf[i].c_balance;
strcpy(c_balance, customer_buf[i].c_balance);

c_ytd_payment = customer_buf[i].c_ytd_payment;
c_payment_cnt = customer_buf[i].c_payment_cnt;
c_delivery_cnt = customer_buf[i].c_delivery_cnt;

strcpy(c_data, customer_buf[i].c_data);

// Send data to server
rc = bcp_sendrow(c_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

customer_rows_loaded++;
CheckForCommit(c_hdbc1, c_hstmt1,
customer_rows_loaded, "customer", &customer_time_start->time_start);
}
}

//=====
//
// Function : LoadHistoryTable
//
//=====

void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    int i;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);

```

```

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN,
NULL, 0, SQLCHARACTER, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0,
8);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);

        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2,
history_rows_loaded, "history", &history_time_start->time_start);
    }
}

//=====
//
// Function : LoadOrders
//
//=====

void LoadOrders()
{
    LOADER_TIME_STRUCT orders_time_start;
    LOADER_TIME_STRUCT new_order_time_start;

```

```

        LOADER_TIME_STRUCT  order_line_time_start;
        short              w_id;
    short      d_id;
        DWORD
dwThreadID[MAX_ORDER_THREADS];
        HANDLE
hThread[MAX_ORDER_THREADS];
        char              name[20];
        RETCODE
rc;
        char
bcpHint[128];

        // seed with unique number
        seed(6);

        printf("Loading orders...\n");

        // if build index before load...
        if ((aptr->build_index == 1) && (aptr->index_order == 1))
        {
                BuildIndex("idxordcl");
                BuildIndex("idxnodcl");
                BuildIndex("idxodcl");
        }

        // initialize bulk copy
        sprintf(name, "%s..%s", aptr->database, "orders");

        rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
        if (rc != SUCCEEDED)
                HandleErrorDBC(o_hdbc1);

        if ((aptr->build_index == 1) && (aptr->index_order == 1))
        {
                sprintf(bcpHint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
                rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcpHint);

                if (rc != SUCCEEDED)
                        HandleErrorDBC(o_hdbc1);
        }

        sprintf(name, "%s..%s", aptr->database, "new_order");

        rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
        if (rc != SUCCEEDED)
                HandleErrorDBC(o_hdbc2);

        if ((aptr->build_index == 1) && (aptr->index_order == 1))
        {
                sprintf(bcpHint, "tablock, order (no_w_id, no_d_id,
no_o_id), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
                rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcpHint);

                if (rc != SUCCEEDED)
                        HandleErrorDBC(o_hdbc2);
        }

        sprintf(name, "%s..%s", aptr->database, "order_line");

        rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);

        if (rc != SUCCEEDED)
                HandleErrorDBC(o_hdbc3);

        if ((aptr->build_index == 1) && (aptr->index_order == 1))
                {
                        sprintf(bcpHint, "tablock, order (ol_w_id, ol_d_id,
ol_o_id, ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses *
300000));
                        rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcpHint);

                        if (rc != SUCCEEDED)
                                HandleErrorDBC(o_hdbc3);
                }

                orders_rows_loaded = 0;
                new_order_rows_loaded = 0;
                order_line_rows_loaded = 0;

                OrdersBufInit();

                orders_time_start.time_start = (TimeNow() / MILLI);
                new_order_time_start.time_start = (TimeNow() / MILLI);
                order_line_time_start.time_start = (TimeNow() / MILLI);

                for (w_id = (short)aptr->starting_warehouse; w_id <=
aptr->num_warehouses; w_id++)
                {
                        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE;
d_id++)
                                {
                                        OrdersBufLoad(d_id, w_id);

                                        // start parallel loading threads here...

                                        // start Orders table thread

                                        printf("...Loading Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

                                        hThread[0] = CreateThread(NULL,

                                                0,

                                                (LPTHREAD_START_ROUTINE) LoadOrdersTable,

                                                &orders_time_start,

                                                0,

                                                &dwThreadID[0]);

                                        if (hThread[0] == NULL)
                                        {
                                                printf("Error, failed in creating
creating thread = 0.\n");
                                                exit(-1);
                                        }

                                        // start NewOrder table thread

                                        printf("...Loading New-Order Table for: d_id
= %d, w_id = %d\n", d_id, w_id);

                                        hThread[1] = CreateThread(NULL,

                                                0,

                                                (LPTHREAD_START_ROUTINE) LoadNewOrderTable,

                                                &new_order_time_start,

```

```

0,
&dwThreadID[1]);
    if (hThread[1] == NULL)
    {
        printf("Error, failed in creating
creating thread = 1.\n");
        exit(-1);
    }
    // start Order-Line table thread
    printf("...Loading Order-Line Table for: d_id
= %d, w_id = %d\n", d_id, w_id);
    hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadID[2]);
    if (hThread[2] == NULL)
    {
        printf("Error, failed in creating
creating thread = 2.\n");
        exit(-1);
    }
    WaitForSingleObject( hThread[0], INFINITE
);
    WaitForSingleObject( hThread[1], INFINITE
);
    WaitForSingleObject( hThread[2], INFINITE
);
    if (CloseHandle(hThread[0]) == FALSE)
    {
        printf("Error, failed in closing
Orders thread handle with errno: %d\n", GetLastError());
    }
    if (CloseHandle(hThread[1]) == FALSE)
    {
        printf("Error, failed in closing
NewOrder thread handle with errno: %d\n", GetLastError());
    }
    if (CloseHandle(hThread[2]) == FALSE)
    {
        printf("Error, failed in closing
OrderLine thread handle with errno: %d\n", GetLastError());
    }
}
printf("Finished loading orders.\n");
return;

```

```

}
//=====
//
// Function : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufInit()
{
    int i;
    int j;
    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o_ol_cnt = 0;
        orders_buf[i].o_all_local = 0;
        for (j=0;j<=14;j++)
        {
            orders_buf[i].o_ol[j].ol = 0;
            orders_buf[i].o_ol[j].ol_i_id = 0;
            orders_buf[i].o_ol[j].ol_supply_w_id = 0;
            orders_buf[i].o_ol[j].ol_quantity = 0;
            orders_buf[i].o_ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o_ol[j].ol_dist_info, "");
        }
    }
}
//=====
//
// Function : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufLoad(int d_id, int w_id)
{
    int cust[ORDERS_PER_DISTRICT+1];
    long o_id;
    short ol;
    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
d_id, w_id);
    GetPermutation(cust, orders_per_district);
    for (o_id=0;o_id<orders_per_district;o_id++)
    {

```

```

// Generate ORDER and NEW-ORDER data

orders_buf[o_id].o_d_id = d_id;
orders_buf[o_id].o_w_id = w_id;
orders_buf[o_id].o_id = o_id+1;
orders_buf[o_id].o_c_id = cust[o_id+1];
orders_buf[o_id].o_ol_cnt = (short)RandomNumber(5L,
15L);

if (o_id < first_new_order)
{
    orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);
    orders_buf[o_id].o_all_local = 1;
}
else
{
    orders_buf[o_id].o_carrier_id = 0;
    orders_buf[o_id].o_all_local = 1;
}

for (ol=0; ol<orders_buf[o_id].o_ol_cnt; ol++)
{
    orders_buf[o_id].o_ol[ol].ol = ol+1;
    orders_buf[o_id].o_ol[ol].ol_i_id =
RandomNumber(1L, max_items);
    orders_buf[o_id].o_ol[ol].ol_supply_w_id =
w_id;
    orders_buf[o_id].o_ol[ol].ol_quantity = 5;
    MakeAlphaString(24, 24,
OL_DIST_INFO_LEN, &orders_buf[o_id].o_ol[ol].ol_dist_info);

    // Generate ORDER-LINE data
    if (o_id < first_new_order)
    {
        orders_buf[o_id].o_ol[ol].ol_amount = 0;
        // Added to insure ol_delivery_d
        set properly during load

        FormatDate(&orders_buf[o_id].o_ol[ol].ol_delivery_d);
    }
    else
    {
        orders_buf[o_id].o_ol[ol].ol_amount = RandomNumber(1,999999)/100.0;
        // Added to insure ol_delivery_d
        set properly during load

        // odbc datetime format
        strepy(orders_buf[o_id].o_ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
    }
}
}

//=====
//

```

```

// Function : LoadOrdersTable
//
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int i;
    long o_id;
    short o_d_id;
    short o_w_id;

    long o_c_id;
    short o_carrier_id;
    short o_ol_cnt;
    short o_all_local;
    char o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc;
    DBINT rcint;

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0,
O_ENTRY_D_LEN, NULL, 0, SQLCHARACTER, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;
        o_c_id = orders_buf[i].o_c_id;
        o_carrier_id = orders_buf[i].o_carrier_id;
        o_ol_cnt = orders_buf[i].o_ol_cnt;
    }
}

```



```

o_all_local = orders_buf[i].o_all_local;

FormatDate(&o_entry_d);

// send data to server
rc = bcp_sendrow(o_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

orders_rows_loaded++;
CheckForCommit(o_hdbc1, o_hstmt1,
orders_rows_loaded, "orders", &orders_time_start->time_start);
}

// rcint = bcp_batch(o_hdbc1);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc1);

if ((o_w_id == apr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order ==
0))

        BuildIndex("idxordcl");

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxordnc");
}
}

//=====
//
// Function : LoadNewOrderTable
//
//=====

void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    int i;
    long o_id;
    short o_d_id;
    short o_w_id;
    RETCODE rc;
    DBINT rcint;

    // Bind NEW-ORDER data

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)

```

```

HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;
        CheckForCommit(o_hdbc2, o_hstmt2,
new_order_rows_loaded, "new_order", &new_order_time_start->time_start);
    }

    // rcint = bcp_batch(o_hdbc2);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc2);

    if ((o_w_id == apr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order ==
0))

            BuildIndex("idxnodcl");
    }
}

//=====
//
// Function : LoadOrderLineTable
//
//=====

void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    int i,j;
    long o_id;
    short o_d_id;
    short o_w_id;

    long ol;
    long ol_i_id;
    short ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    char ol_dist_info[DIST_INFO_LEN+1];
    char ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE rc;

```

```

DBINT          rcint;

// bind ORDER-LINE data
rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 1);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 2);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 4);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 6);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0,
OL_DELIVERY_D_LEN, NULL, 0, SQLCHARACTER, 7);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 9);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN,
NULL, 0, 0, 10);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

for (i = 0; i < orders_per_district; i++)
{
    o_id = orders_buf[i].o_id;
    o_d_id = orders_buf[i].o_d_id;
    o_w_id = orders_buf[i].o_w_id;

    for (j=0; j < orders_buf[i].ol_cnt; j++)
    {
        ol = orders_buf[i].ol[j].ol;
        ol_i_id = orders_buf[i].ol[j].ol_i_id;
        ol_supply_w_id =
orders_buf[i].ol_supply_w_id;
        ol_quantity =
orders_buf[i].ol_quantity;

```

```

        ol_amount =
orders_buf[i].ol[j].ol_amount;
strcpy(ol_delivery_d, orders_buf[i].ol_delivery_d);

strcpy(ol_dist_info, orders_buf[i].ol_dist_info);

rc = bcp_sendrow(o_hdbc3);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

    order_line_rows_loaded++;
    CheckForCommit(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
    }

}

// rcint = bcp_batch(o_hdbc3);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc3);

if ((o_w_id == apr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc3);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc3);

    SQLFreeStmt(o_hstmt3, SQL_DROP);
    SQLDisconnect(o_hdbc3);
    SQLFreeConnect(o_hdbc3);

    // if build index after load...
    if ((apr->build_index == 1) && (apr->index_order ==
0))
        BuildIndex("idxodcl");
}

}

//=====
//
// Function : GetPermutation
//
//=====

void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1; i<=n; i++)
        perm[i] = i;

    for (i=1; i<=n; i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

```

```

//=====
//
// Function : CheckForCommit
//
//=====
void CheckForCommit(HDBC hdbc,
                   HSTMT hstmt,
                   int rows_loaded,
                   char *table_name,
                   long *time_start)
{
    long    time_end, time_diff;
           // DBINT rcint;

    if ( !(rows_loaded % aptr->batch) )
    {
        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("> Loaded %ld rows into %s in %ld sec - Total =
%d (%.2f rps)\n",
              aptr->batch,
              table_name,
              time_diff,
              rows_loaded,
              (float) aptr->batch / (time_diff ?
time_diff : 1L));

        *time_start = time_end;
    }
    return;
}

```

```

//=====
//
// Function : OpenConnections
//
//=====

```

```

void OpenConnections()
{
    RETCODE    rc;

    char        szDriverString[300];
    char        szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
(void*)SQL_OV_ODBC3, 0 );

```

```

SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );

    // Open connections to SQL Server

    // Connection 1

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
                                aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE,
aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = SQLDriverConnect ( i_hdbc1,
                                NULL,
(SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    // Connection 2

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
                                aptr->user,
aptr->password,

```

```

aptr->database );

    rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE,
aptr->pack_size);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = SQLDriverConnect ( w_hdbc1,

NULL,

(SQLCHAR*)&szDriverString[0] ,

SQL_NTS,

(SQLCHAR*)&szDriverStringOut[0],

sizeof(szDriverStringOut),

&cbDriverStringOut,

SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    // Connection 3

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,

aptr->password,

aptr->database );

    rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE,
aptr->pack_size);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = SQLDriverConnect ( c_hdbc1,

NULL,

(SQLCHAR*)&szDriverString[0] ,

SQL_NTS,

(SQLCHAR*)&szDriverStringOut[0],

sizeof(szDriverStringOut),

&cbDriverStringOut,

SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    // Connection 4

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,

```

aptr->user,

aptr->user,

```

aptr->password,

aptr->database );

    rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE,
aptr->pack_size);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = SQLDriverConnect ( c_hdbc2,

NULL,

(SQLCHAR*)&szDriverString[0] ,

SQL_NTS,

(SQLCHAR*)&szDriverStringOut[0],

sizeof(szDriverStringOut),

&cbDriverStringOut,

SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    // Connection 5

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,

aptr->password,

aptr->database );

    rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE,
aptr->pack_size);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);

    rc = SQLDriverConnect ( o_hdbc1,

NULL,

(SQLCHAR*)&szDriverString[0] ,

SQL_NTS,

(SQLCHAR*)&szDriverStringOut[0],

sizeof(szDriverStringOut),

&cbDriverStringOut,

SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);

    // Connection 6

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,

```

aptr->user,

```

aptr->server,

aptr->password,

aptr->database );

    rc = SQLSetConnectOption ( o_hdbc2, SQL_PACKET_SIZE,
aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = SQLDriverConnect ( o_hdbc2,

NULL,

(SQLCHAR*)&szDriverString[0] ,

SQL_NTS,

(SQLCHAR*)&szDriverStringOut[0],

sizeof(szDriverStringOut),

&cbDriverStringOut,

SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    // Connection 7

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

aptr->server,

aptr->password,

aptr->database );

    rc = SQLSetConnectOption ( o_hdbc3, SQL_PACKET_SIZE,
aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = SQLDriverConnect ( o_hdbc3,

NULL,

(SQLCHAR*)&szDriverString[0] ,

SQL_NTS,

(SQLCHAR*)&szDriverStringOut[0],

sizeof(szDriverStringOut),

&cbDriverStringOut,

SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

```

aptr->user,

aptr->user,

```

//=====
//
// Function name: BuildIndex
//
//=====

void BuildIndex(char *index_script)
{
    char    cmd[256];

    printf("Starting index creation: %s\n",index_script);

    sprintf(cmd, "isql -S%s -U%s -P%s -e -i%s\\%s.sql > logs\\%s.log",
aptr->server,
aptr->user,
aptr->password,
aptr->index_script_path,
index_script,
index_script);

    system(cmd);

    printf("Finished index creation: %s\n",index_script);
}

void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR            SqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN rc2;
    char timebuf[128];
    char datebuf[128];
    FILE *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i,
SqlState , &NativeError,
Msg, sizeof(Msg) , &MsgLen )
!= SQL_NO_DATA )
    {

        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog
file.\n");

        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf,
timebuf, szLastError);
            fclose(fp1);
        }

        i++;
    }
}

```

```

}

void HandleErrorSTMT (HSTMT hstmt1)
{
    SQLCHAR          SqlState[6],
    Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN rc2;
    char            timebuf[128];
    char            datebuf[128];
    FILE            *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i,
    SqlState , &NativeError,
    Msg, sizeof(Msg) , &MsgLen )
    != SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpcldr.err", "w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog
file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf,
timebuf, szLastError);
            fclose(fp1);
        }

        i++;
    }
}

void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000",
&when );

    return;
}

//=====
//
// Function : CheckSQL

```

```

//
//=====
//=====

void CheckSQL()
{
    RETCODE rc;

    char            szDriverString[300];
    char            szDriverStringOut[1024];
    int             SQLBuildFlag;
    char            resp;

    SQLSMALLINT    cbDriverStringOut;
    SQLCHAR        SQLVersion[19];
    SQLINTEGER     SQLVersionInd;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
(void*)SQL_OV_ODBC3, 0);

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &v_hdbc);

    SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER);

    // Open connection to SQL Server
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s" ,
aptr->server,
aptr->user,
aptr->password );

    if ( SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE,
(SQLPOINTER)aptr->pack_size, SQL_IS_UIINTEGER ) != SQL_SUCCESS )
        HandleErrorDBC(v_hdbc);

    rc = SQLDriverConnect ( v_hdbc,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

    if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
        HandleErrorDBC(v_hdbc);

    if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt)
!= SQL_SUCCESS )
        HandleErrorSTMT(v_hstmt);
}

```

```

        rc = SQLBindCol(v_hstmt, 4, SQL_C_CHAR, &SQLVersion,
sizeof(SQLVersion), &SQLVersionInd);

        // issue SQL Server extended stored procedure (xp_msver) to
determine installed version
        rc = SQLExecDirect(v_hstmt, "EXECUTE xp_msver
ProductVersion", SQL_NTS);

        if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
            HandleErrorSTMT(v_hstmt);

        rc = SQLFetch(v_hstmt);

        if (rc != SQL_SUCCESS)
            HandleErrorDBC(v_hdbc);

        // Check build number to ensure 8.00.194 or higher
        SQLBuildFlag = 1;

        // first check the Major version
        if ( SQLVersion[0] == '8' )
        {
            if (( SQLVersion[2] == '0' ) & ( SQLVersion[3] == '0' ) )
            {
                if ( SQLVersion[5] == '1' )
                {
                    if ( (SQLVersion[6] == '9') &
(SQLVersion[7] == '4') )
                    {
                        SQLBuildFlag = 0;
                        printf("You are using
SQL Server version = %9s\n\n", SQLVersion);
                    }
                    else
                    {
                        SQLBuildFlag = 1;
                    }
                }
                else
                {
                    if ( SQLVersion[5] == '3' )
                    {
                        if ( (SQLVersion[6] >=
53) & (SQLVersion[7] >= 48) )
                        {
                            SQLBuildFlag = 0;
                            printf("You
are using SQL Server version = %9s\n\n", SQLVersion);
                        }
                        else
                        {
                            SQLBuildFlag = 1;
                        }
                    }
                }
            }
        }
        else
        {
            SQLBuildFlag = 1;
        }
    }
    if ( SQLBuildFlag == 1 )

```

```

    {
        printf("NOTE: The SQL Server version you are using is
not supported\n");
        printf("for TPC-C benchmarking. You currently have
SQL Server version %9s\n",SQLVersion);
        printf("installed. Please upgrade to Microsoft SQL
Server 2000 (8.00.0194) or better.\n");
        printf("and re-run the SETUP program.\n\n");
        printf("Do you wish to continue with setup? (Y/N): ");
        resp = getchar();
        if ( ( resp == 'N' ) || (resp == 'n') )
        {
            printf("\nSetup Aborted!\n");
            exit(1);
        }
    }

    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    return;
}

//=====
//
// Function : CheckDataBase
//=====

void CheckDataBase()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    char TablesBitMap[9] =
{"000000000"};
    int i, ExitFlag;

    SQLSMALLINT cbDriverStringOut;
    SQLCHAR TabName[10];
    SQLINTEGER TabNameInd, TabCount,
TabCountInd;

    ExitFlag = 0;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
(void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv, &v_hdbc);

    SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void
*)SQL_BCP_ON, SQL_IS_INTEGER );

    // Open connection to SQL Server

    sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",

```

```

aptr->server,
aptr->password,
aptr->database );

rc = SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE,
(SQLPOINTER)aptr->pack_size, SQL_IS_UIINTEGER );
if (rc != SQL_SUCCESS)
    HandleErrorDBC(v_hdbc);

rc = SQLDriverConnect ( v_hdbc,
                        NULL,
(SQLCHAR*)&szDriverString[0] ,
                        SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
                        SQL_NTS,
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

// if the rc is SQL_ERROR, the the TPCC database probably does
not exist
if (rc == SQL_ERROR)
{
    printf("The database TPCC does not appear to exist!\n");
    printf("\nCheck LOGS\ directory for database creation
errors.\n");

    // cleanup database connections and handles
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    // since there is not a database, exit back to SETUP.CMD
    exit(1);
}

if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt)
!= SQL_SUCCESS )
    HandleErrorDBC(v_hdbc);

if ( SQLBindCol(v_hstmt, 1, SQL_C_ULONG, &TabCount, 0,
&TabCountInd) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// count the number of user tables from sysobjects
rc = SQLExecDirect(v_hstmt, "select count(*) from sysobjects
where xtype = 'U'", SQL_NTS);
if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
    HandleErrorSTMT(v_hstmt);

if ( SQLFetch(v_hstmt) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// if the number of tables is less than 9, select all the user tables in
TPCC
if (TabCount != 9)
{
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);

```

```

SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc ,
&v_hstmt);

if ( SQLBindCol(v_hstmt, 1, SQL_C_CHAR,
&TabName, sizeof(TabName), &TabNameInd) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// select the list of user tables into a result set
rc = SQLExecDirect(v_hstmt, "select * from sysobjects
where xtype = 'U'", SQL_NTS);
if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
    HandleErrorSTMT(v_hstmt);

// go through the result set and set the bitmap for each
found table
// set the bitmap to '1' if the table name is found
while ((rc = SQLFetch(v_hstmt)) != SQL_NO_DATA)
{
    switch( TabName[0] )
    {
        case 'w':
            TablesBitMap[0] = '1';
            break;
        case 'd':
            TablesBitMap[1] = '1';
            break;
        case 'c':
            TablesBitMap[2] = '1';
            break;
        case 'h':
            TablesBitMap[3] = '1';
            break;
        case 'n':
            TablesBitMap[4] = '1';
            break;
        case 'o':
            if (TabName[5] = 's')
                TablesBitMap[5] = '1';
            if (TabName[5] = '_')
                TablesBitMap[6] = '1';
            break;
        case 't':
            TablesBitMap[7] = '1';
            break;
        case 's':
            TablesBitMap[8] = '1';
            break;
    }
}

// a '0' ExitFlag means do NOT exit the loader early, a '1'
means exit the loader early
ExitFlag = 0;

// iterate through the bitmap to display which table(s) is
actually missing
for (i = 0; i <= 8; i++)
{
    switch(i)
    {
        case 0:
            if (TablesBitMap[i] == '0')
            {
                printf("The Warehouse
table is missing or damaged.\n");
                ExitFlag = 1;
            }

```



```

}
break;
case 1:
if (TablesBitMap[i] == '0')
{
printf("The District
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 2:
if (TablesBitMap[i] == '0')
{
printf("The Customer
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 3:
if (TablesBitMap[i] == '0')
{
printf("The History
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 4:
if (TablesBitMap[i] == '0')
{
printf("The New_Order
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 5:
if (TablesBitMap[i] == '0')
{
printf("The Orders table
is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 6:
if (TablesBitMap[i] == '0')
{
printf("The Order_Line
table is missing or damaged.\n");
ExitFlag = 1;
}
break;
case 7:
if (TablesBitMap[i] == '0')
{
printf("The Item table is
missing or damaged.\n");
ExitFlag = 1;
}
break;
case 8:
if (TablesBitMap[i] == '0')
{
printf("The Stock table
is missing or damaged.\n");
ExitFlag = 1;
}
break;
}
}
}

// if one or more tables are missing, display message and
exit the loader
if (ExitFlag = 1)
{
printf("\nExiting TPC-C Loader!\n");
printf("\nCheck LOGS\ directory for
database\n");
printf("or table creation errors.\n");
// cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT,
v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC,
v_hdbc);
exit(1);
}
// cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);
return;
}

tpccldr.mak
# Microsoft Developer Studio Generated NMAKE File, Format Version 4.10
# ** DO NOT EDIT **
# TARGETTYPE "Win32 (x86) Console Application" 0x0103
!IF "$(CFG)" == ""
CFG=tpccldr - Win32 Debug
!MESSAGE No configuration specified. Defaulting to tpccldr - Win32 Debug.
!ENDIF
!IF "$(CFG)" != "tpccldr - Win32 Release" && "$(CFG)" !=\
"tpccldr - Win32 Debug"
!MESSAGE Invalid configuration "$(CFG)" specified.
!MESSAGE You can specify a configuration when running NMAKE on this
makefile
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpccldr.mak" CFG="tpccldr - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpccldr - Win32 Release" (based on "Win32 (x86) Console
Application")
!MESSAGE "tpccldr - Win32 Debug" (based on "Win32 (x86) Console
Application")
!MESSAGE
!ERROR An invalid configuration is specified.
!ENDIF
!IF "$(OS)" == "Windows_NT"
NULL=
!ELSE
NULL=nul
!ENDIF
#####
#####

```

```

# Begin Project
# PROP Target_Last_Scanned "tpcldr - Win32 Debug"
RSC=rc.exe
CPP=cl.exe

!IF "$(CFG)" == "tpcldr - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir "bin"
# PROP Intermediate_Dir "objects"
# PROP Target_Dir ""
OUTDIR=.bin
INTDIR=.objects

ALL : "$(OUTDIR)\tpcldr.exe"

CLEAN :
    -@erase "$(INTDIR)\getargs.obj"
    -@erase "$(INTDIR)\random.obj"
    -@erase "$(INTDIR)\strings.obj"
    -@erase "$(INTDIR)\time.obj"
    -@erase "$(INTDIR)\tpcldr.obj"
    -@erase "$(OUTDIR)\tpcldr.exe"

"$$(OUTDIR)" :
    if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR)"

"$$(INTDIR)" :
    if not exist "$(INTDIR)/$(NULL)" mkdir "$(INTDIR)"

# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
"_CONSOLE" /YX /c
# ADD CPP /nologo /MT /W3 /GX /O2 /I "c:\mssql\dblib\include" /D
"NDEBUG" /D "WIN32" /D "_CONSOLE" /D "DBNTWIN32" /c
# SUBTRACT CPP /YX
CPP_PROJ=/nologo /MT /W3 /GX /O2 /I "c:\mssql\dblib\include" /D
"NDEBUG" /D\
"WIN32" /D "_CONSOLE" /D "DBNTWIN32" /Fo"$$(INTDIR)"/ /c
CPP_OBJSDIR=.objects/
CPP_SBRS=.
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$$(OUTDIR)\tpcldr.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
odbc32.lib /nologo /subsystem:console /machine:I386
# ADD LINK32 c:\mssql\dblib\lib\ntwdblib.lib kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbccp32.lib /nologo /subsystem:console /pdb:none
/machine:I386
LINK32_FLAGS=c:\mssql\dblib\lib\ntwdblib.lib kernel32.lib user32.lib
gdi32.lib\
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib\
uuid.lib odbccp32.lib /nologo /subsystem:console /pdb:none\
/machine:I386 /out:"$(OUTDIR)\tpcldr.exe"
LINK32_OBJSDIR= \

```

```

"$$(INTDIR)\getargs.obj" \
"$$(INTDIR)\random.obj" \
"$$(INTDIR)\strings.obj" \
"$$(INTDIR)\time.obj" \
"$$(INTDIR)\tpcldr.obj"

"$$(OUTDIR)\tpcldr.exe" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJSDIR)
$(LINK32) @<<
$(LINK32_FLAGS) $(LINK32_OBJSDIR)
<<

!ELSEIF "$(CFG)" == "tpcldr - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir "bin"
# PROP Intermediate_Dir "objects"
# PROP Target_Dir ""
OUTDIR=.bin
INTDIR=.objects

ALL : "$(OUTDIR)\tpcldr.exe"

CLEAN :
    -@erase "$(INTDIR)\getargs.obj"
    -@erase "$(INTDIR)\random.obj"
    -@erase "$(INTDIR)\strings.obj"
    -@erase "$(INTDIR)\time.obj"
    -@erase "$(INTDIR)\tpcldr.obj"
    -@erase "$(INTDIR)\vc40.idb"
    -@erase "$(INTDIR)\vc40.pdb"
    -@erase "$(OUTDIR)\tpcldr.exe"

"$$(OUTDIR)" :
    if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR)"

"$$(INTDIR)" :
    if not exist "$(INTDIR)/$(NULL)" mkdir "$(INTDIR)"

# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG"
/D "_CONSOLE" /YX /c
# ADD CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /I "c:\mssql\dblib\include" /D
"_DEBUG" /D "WIN32" /D "_CONSOLE" /D "DBNTWIN32" /c
# SUBTRACT CPP /YX
CPP_PROJ=/nologo /MTd /W3 /Gm /GX /Zi /Od /I "c:\mssql\dblib\include" /D\
"_DEBUG" /D "WIN32" /D "_CONSOLE" /D "DBNTWIN32"
/Fo"$$(INTDIR)"/
/Fd"$$(INTDIR)"/ /c
CPP_OBJSDIR=.objects/
CPP_SBRS=.
# ADD BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$$(OUTDIR)\tpcldr.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
/nologo /subsystem:console /debug /machine:I386

```

```

# ADD LINK32 c:\mssql\dblib\lib\ntwdblib.lib kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbcc32.lib odbccp32.lib /nologo /subsystem:console /pdb:none /debug
/machine:I386
LINK32_FLAGS=c:\mssql\dblib\lib\ntwdblib.lib kernel32.lib user32.lib
gdi32.lib\
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib\
uuid.lib odbcc32.lib odbccp32.lib /nologo /subsystem:console /pdb:none /debug\
/machine:I386 /out:"$(OUTDIR)\tpccldr.exe"
LINK32_OBJS= \
    "$(INTDIR)\getargs.obj" \
    "$(INTDIR)\random.obj" \
    "$(INTDIR)\strings.obj" \
    "$(INTDIR)\time.obj" \
    "$(INTDIR)\tpccldr.obj"

"$(OUTDIR)\tpccldr.exe" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ENDIF

.c{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cxx{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.c{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cxx{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

#####
#####
# Begin Target

# Name "tpccldr - Win32 Release"
# Name "tpccldr - Win32 Debug"

!IF "$(CFG)" == "tpccldr - Win32 Release"

!ELSEIF "$(CFG)" == "tpccldr - Win32 Debug"

!ENDIF

#####
#####
# Begin Source File

SOURCE=.\src\random.c
DEP_CPP_RANDO= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\random.obj" : $(SOURCE) $(DEP_CPP_RANDO) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File
# End Target
# End Project

# End Source File
#####
#####
# Begin Source File

SOURCE=.\src\strings.c
DEP_CPP_STRIN= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\strings.obj" : $(SOURCE) $(DEP_CPP_STRIN) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File
#####
#####
# Begin Source File

SOURCE=.\src\time.c
DEP_CPP_TIME_= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\time.obj" : $(SOURCE) $(DEP_CPP_TIME_) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File
#####
#####
# Begin Source File

SOURCE=.\src\tpccldr.c
DEP_CPP_TPCCCL= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\tpccldr.obj" : $(SOURCE) $(DEP_CPP_TPCCCL) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File
#####
#####
# Begin Source File

SOURCE=.\src\getargs.c
DEP_CPP_GETAR= \
    ".\src\tpcc.h" \
    "mssql\dblib\include\sqldb.h" \
    "mssql\dblib\include\sqlfront.h"

"$(INTDIR)\getargs.obj" : $(SOURCE) $(DEP_CPP_GETAR) "$(INTDIR)"
    $(CPP) $(CPP_PROJ) $(SOURCE)

# End Source File

```


#####

Appendix C: Tunable Parameters

Microsoft Windows Server 2003 Enterprise Server

Changes to the SUT

Changes made to the default installation of .Microsoft Windows Server 2003 Enterprise Server on the SUT

The following services that defaulted to automatic start up, were set to manual start up.

- Alerter
- Automatic Updates
- Computer Browser
- DHCP Client
- Distributed File System
- Distributed Link Tracing Client
- DNS Client
- Help and Support
- IPSEC Policy Agent
- MSSQLSERVER
- Print Spooler
- Remote Registry Service
- Secondary Logon Server
- System Event Notification
- Task Scheduler
- Wireless Configuration

c:\boot.ini added /PAE /3gb

gpedit.msc - Computer Configuration - Windows Settings - Security Settings - Local Policies - User Rights Assignments - policy 'Lock pages in memory' addrd group 'Administrators'

regedit

Added DWORD value to HKLM\SYSTEM\CurrentControlSet\Control\Session Manager\Memory Management
"DontVerifyRandomDrivers" 0x1
Added key "I/O System" to
HKLM\SYSTEM\CurrentControlSet\Control\Session Manager
Added DWORD value to HKLM\SYSTEM\CurrentControlSet\Control\Session Manager\I/O System
"CountOperations" 0x0

SUT System Information Report

System Information report written at: 02/26/03 12:41:16
System Name: IBMSERVER3
[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) .NET Server 2003, Enterprise Edition
Version	5.2.3718 Build 3718
OS Manufacturer	Microsoft Corporation
Activation Status	Activation Pending (31 days remaining)
System Name	IBMSERVER3
System Manufacturer	IBM
System Model	eServer xSeries 360 -[DJFGHOS]-

System Type X86-based PC
Processor x86 Family 15 Model 2 Stepping 2 GenuineIntel ~1900 Mhz
Processor x86 Family 15 Model 2 Stepping 2 GenuineIntel ~1900 Mhz
Processor x86 Family 15 Model 2 Stepping 2 GenuineIntel ~1900 Mhz
Processor x86 Family 15 Model 2 Stepping 2 GenuineIntel ~1900 Mhz
Processor x86 Family 15 Model 2 Stepping 2 GenuineIntel ~1900 Mhz
Processor x86 Family 15 Model 2 Stepping 2 GenuineIntel ~1900 Mhz
Processor x86 Family 15 Model 2 Stepping 2 GenuineIntel ~1900 Mhz
Processor x86 Family 15 Model 2 Stepping 2 GenuineIntel ~1900 Mhz
BIOS Version/Date IBM -[RU50SB_01-1.06]-, 1/14/2003
SMBIOS Version 2.3
Windows Directory C:\WINDOWS
System Directory C:\WINDOWS\system32
Boot Device \Device\HarddiskVolume1
Locale United States
Hardware Abstraction Layer Version = "5.2.3718.0 (dnsrv.021114-1947)"
User NameIBMSERVER3\Administrator
Time ZoneEastern Standard Time
Total Physical Memory 8,192.00 MB
Available Physical Memory 7.52 GB
Total Virtual Memory 17.35 GB
Available Virtual Memory 17.04 GB
Page File Space 9.61 GB
Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource	Device
Memory Address 0xF0000000-0xF7FFFFFF	PCI bus
Memory Address 0xF0000000-0xF7FFFFFF	S3 Graphics Inc. Savage4 (Microsoft Corporation)
I/O Port 0x00000000-0x00001FFF	PCI bus
I/O Port 0x00000000-0x00001FFF	Direct memory access controller
I/O Port 0x00002000-0x00003FFF	PCI bus
I/O Port 0x00002000-0x00003FFF	DEC 21154 PCI to PCI bridge
I/O Port 0x00002000-0x00003FFF	Mylex eXtremeRAID 2000 Controller
Memory Address 0xE8000000-0xEA3FFFFFF	DEC 21154 PCI to PCI bridge
Memory Address 0xE8000000-0xEA3FFFFFF	Mylex eXtremeRAID 2000 Controller
Memory Address 0xDA000000-0xDBFFFFFF	DEC 21154 PCI to PCI bridge
Memory Address 0xDA000000-0xDBFFFFFF	Mylex eXtremeRAID 2000 Controller
Memory Address 0xD8000000-0xDFFFFFFF	PCI bus
Memory Address 0xD8000000-0xDFFFFFFF	DEC 21154 PCI to PCI bridge
Memory Address 0xD8000000-0xDFFFFFFF	Mylex eXtremeRAID 2000 Disk Array Controller
Memory Address 0xEC000000-0xEE3FFFFFF	DEC 21154 PCI to PCI bridge
Memory Address 0xEC000000-0xEE3FFFFFF	Mylex eXtremeRAID 2000 Controller
I/O Port 0x00006000-0x00006FFF	DEC 21154 PCI to PCI bridge
I/O Port 0x00006000-0x00006FFF	Mylex eXtremeRAID 2000 Controller

		[Forced Hardware]	
I/O Port	Device	PNP Device ID	
I/O Port 0x00003000-0x00003FFF	DEC 21154 PCI to PCI bridge		
I/O Port 0x00003000-0x00003FFF	Mylex eXtremeRAID 2000		
Controller			
[I/O]			
Memory Address 0xCE000000-0xCFFFFFFF	DEC 21154 PCI to PCI bridge	Resource Device Status	
Memory Address 0xCE000000-0xCFFFFFFF	Mylex eXtremeRAID	0x00000000-0x00001FFF	PCI bus OK
2000 Controller		0x00000000-0x00001FFF	Direct memory access controller OK
		0x000003B0-0x000003BB	S3 Graphics Inc. Savage4 (Microsoft Corporation) OK
Memory Address 0xCC000000-0xCFFFFFFF	PCI bus	0x000003C0-0x000003DF	S3 Graphics Inc. Savage4 (Microsoft Corporation) OK
Memory Address 0xCC000000-0xCFFFFFFF	DEC 21154 PCI to PCI bridge	0x00001800-0x0000187F	IBM eServer xSeries 360 PCI-X Hotplug Controller OK
Memory Address 0xCC000000-0xCFFFFFFF	Mylex eXtremeRAID	0x00001880-0x000018BF	IBM Netfinity 10/100 Ethernet Adapter OK
2000 Controller		0x00001900-0x000019FF	Adaptec AIC-7892 Ultra160 PCI SCSI Card OK
Memory Address 0xD0000000-0xD7FFFFFFF	PCI bus	0x00000A79-0x00000A79	ISAPNP Read Data Port OK
Memory Address 0xD0000000-0xD7FFFFFFF	DEC 21154 PCI to PCI bridge	0x00000279-0x00000279	ISAPNP Read Data Port OK
Memory Address 0xD0000000-0xD7FFFFFFF	Mylex eXtremeRAID	0x00000274-0x00000277	ISAPNP Read Data Port OK
2000 Controller		0x0000002E-0x0000002F	Motherboard resources OK
		0x00000438-0x00000439	Motherboard resources OK
Memory Address 0xDE000000-0xDFFFFFFF	DEC 21154 PCI to PCI bridge	0x00000430-0x00000437	Motherboard resources OK
Memory Address 0xDE000000-0xDFFFFFFF	Mylex eXtremeRAID	0x00000060-0x00000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK
2000 Controller		0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK
I/O Port 0x00005000-0x00005FFF	DEC 21154 PCI to PCI bridge	0x000003F0-0x000003F5	Standard floppy disk controller OK
I/O Port 0x00005000-0x00005FFF	Mylex eXtremeRAID 2000	0x000003F7-0x000003F7	Standard floppy disk controller OK
Controller		0x00000020-0x00000021	Advanced programmable interrupt controller OK
Memory Address 0xE4000000-0xE63FFFFFFF	DEC 21154 PCI to PCI bridge	0x000000A0-0x000000A1	Advanced programmable interrupt controller OK
Memory Address 0xE4000000-0xE63FFFFFFF	Mylex eXtremeRAID	0x00000080-0x0000008F	Direct memory access controller OK
2000 Controller		0x000000C0-0x000000DF	Direct memory access controller OK
Memory Address 0xE0000000-0xEFFFFFFF	PCI bus	0x00000040-0x00000043	System timer OK
Memory Address 0xE0000000-0xEFFFFFFF	DEC 21154 PCI to PCI bridge	0x00000070-0x00000073	System CMOS/real time clock OK
Memory Address 0xE0000000-0xEFFFFFFF	Mylex eXtremeRAID	0x00000061-0x00000061	System speaker OK
2000 Disk Array Controller		0x00000374-0x00000375	Motherboard resources OK
		0x00000377-0x00000377	Motherboard resources OK
I/O Port 0x00007000-0x00007FFF	DEC 21154 PCI to PCI bridge	0x00000490-0x000004AF	Motherboard resources OK
I/O Port 0x00007000-0x00007FFF	Mylex eXtremeRAID 2000 Disk	0x0000040B-0x0000040B	Motherboard resources OK
Array Controller		0x000004D0-0x000004D1	Motherboard resources OK
		0x000004D6-0x000004D6	Motherboard resources OK
I/O Port 0x00004000-0x00007FFF	PCI bus	0x00000600-0x00000600	Motherboard resources OK
I/O Port 0x00004000-0x00007FFF	DEC 21154 PCI to PCI bridge	0x00000C00-0x00000C01	Motherboard resources OK
I/O Port 0x00004000-0x00007FFF	Mylex eXtremeRAID 2000	0x00000C14-0x00000C14	Motherboard resources OK
Controller		0x00000C49-0x00000C49	Motherboard resources OK
		0x00000C4A-0x00000C4A	Motherboard resources OK
Memory Address 0xD4000000-0xD63FFFFFFF	DEC 21154 PCI to PCI bridge	0x00000C52-0x00000C52	Motherboard resources OK
Memory Address 0xD4000000-0xD63FFFFFFF	Mylex eXtremeRAID	0x00000CD6-0x00000CD7	Motherboard resources OK
2000 Controller		0x00000F50-0x00000F58	Motherboard resources OK
		0x00000700-0x0000070F	OSB4 IDE Controller OK
		0x000001F0-0x000001F7	Primary IDE Channel OK
Memory Address 0xDC000000-0xDDFFFFFFF	DEC 21154 PCI to PCI bridge	0x000003F6-0x000003F6	Primary IDE Channel OK
Memory Address 0xDC000000-0xDDFFFFFFF	Mylex eXtremeRAID	0x00000170-0x00000177	Secondary IDE Channel OK
2000 Controller		0x00000376-0x00000376	Secondary IDE Channel OK
		0x00004000-0x00007FFF	PCI bus OK
		0x00004000-0x00007FFF	DEC 21154 PCI to PCI bridge OK
		0x00004000-0x00007FFF	Mylex eXtremeRAID 2000 Controller OK
[DMA]		0x00007000-0x00007FFF	DEC 21154 PCI to PCI bridge OK
Resource Device Status		0x00007000-0x00007FFF	Mylex eXtremeRAID 2000 Disk Array Controller OK
Channel 2 Standard floppy disk controller		0x00006000-0x00006FFF	DEC 21154 PCI to PCI bridge OK
Channel 4 Direct memory access controller			

0x00006000-0x00006FFF Mylex eXtremeRAID 2000 Controller OK
 0x00005000-0x00005FFF DEC 21154 PCI to PCI bridge OK
 0x00005000-0x00005FFF Mylex eXtremeRAID 2000 Controller OK
 0x00002000-0x00003FFF PCI bus OK
 0x00002000-0x00003FFF DEC 21154 PCI to PCI bridge OK
 0x00002000-0x00003FFF Mylex eXtremeRAID 2000 Controller OK
 0x00003000-0x00003FFF DEC 21154 PCI to PCI bridge OK
 0x00003000-0x00003FFF Mylex eXtremeRAID 2000 Controller OK

[IRQs]

Resource	Device	Status
IRQ 36	Microsoft ACPI-Compliant System	OK
IRQ 5	IBM eServer xSeries 360 PCI-X Hotplug Controller	OK
IRQ 42	IBM Netfinity 10/100 Ethernet Adapter	OK
IRQ 41	Adaptec AIC-7892 Ultra160 PCI SCSI Card	OK
IRQ 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
IRQ 12	PS/2 Compatible Mouse	OK
IRQ 6	Standard floppy disk controller	OK
IRQ 0	System timer	OK
IRQ 8	System CMOS/real time clock	OK
IRQ 14	Primary IDE Channel	OK
IRQ 16	ServerWorks (RCC) PCI to USB Open Host Controller	OK
IRQ 43	Mylex eXtremeRAID 2000 Disk Array Controller	OK
IRQ 24	Mylex eXtremeRAID 2000 Controller	OK
IRQ 19	Mylex eXtremeRAID 2000 Controller	OK
IRQ 20	Mylex eXtremeRAID 2000 Controller	OK
IRQ 29	Mylex eXtremeRAID 2000 Controller	OK
IRQ 33	Mylex eXtremeRAID 2000 Controller	OK

[Memory]

Resource	Device	Status
0xF0000000-0xF7FFFFFF	PCI bus	OK
0xF0000000-0xF7FFFFFF	S3 Graphics Inc. Savage4 (Microsoft Corporation)	OK
0xF8000000-0xFBFFFFFF	PCI bus	OK
0xFBF80000-0xFBFFFFFF	S3 Graphics Inc. Savage4 (Microsoft Corporation)	OK
0xA0000-0xBFFFF	S3 Graphics Inc. Savage4 (Microsoft Corporation)	OK
0xFBC00000-0xFBDFFFFF	IBM eServer xSeries 360 PCI-X Hotplug Controller	OK
0xFBF7F000-0xFBF7FFFF	IBM Netfinity 10/100 Ethernet Adapter	OK
0xFBE00000-0xFBEFFFFF	IBM Netfinity 10/100 Ethernet Adapter	OK
0xFBF7E000-0xFBF7EFFF	Adaptec AIC-7892 Ultra160 PCI SCSI Card	OK
0xFBF7D000-0xFBF7DFFF	ServerWorks (RCC) PCI to USB Open Host Controller	OK
0xD8000000-0xDFFFFFFF	PCI bus	OK
0xD8000000-0xDFFFFFFF	DEC 21154 PCI to PCI bridge	OK
0xD8000000-0xDFFFFFFF	Mylex eXtremeRAID 2000 Disk Array Controller	OK
0xE0000000-0xEFFFFFFF	PCI bus	OK
0xE0000000-0xEFFFFFFF	DEC 21154 PCI to PCI bridge	OK
0xE0000000-0xEFFFFFFF	Mylex eXtremeRAID 2000 Disk Array Controller	OK
0xE4000000-0xE63FFFFF	DEC 21154 PCI to PCI bridge	OK
0xE4000000-0xE63FFFFF	Mylex eXtremeRAID 2000 Controller	OK
0xDA000000-0xDBFFFFFF	DEC 21154 PCI to PCI bridge	OK

0xDA000000-0xDBFFFFFF Mylex eXtremeRAID 2000 Controller OK
 0xE8000000-0xEA3FFFFF DEC 21154 PCI to PCI bridge OK
 0xE8000000-0xEA3FFFFF Mylex eXtremeRAID 2000 Controller OK
 0xDC000000-0xDDFFFFFF DEC 21154 PCI to PCI bridge OK
 0xDC000000-0xDDFFFFFF Mylex eXtremeRAID 2000 Controller OK
 0xEC000000-0xEE3FFFFF DEC 21154 PCI to PCI bridge OK
 0xEC000000-0xEE3FFFFF Mylex eXtremeRAID 2000 Controller OK
 0xDE000000-0xDFFFFFFF DEC 21154 PCI to PCI bridge OK
 0xDE000000-0xDFFFFFFF Mylex eXtremeRAID 2000 Controller OK
 0xCC000000-0xCFFFFFFF PCI bus OK
 0xCC000000-0xCFFFFFFF DEC 21154 PCI to PCI bridge OK
 0xCC000000-0xCFFFFFFF Mylex eXtremeRAID 2000 Controller OK
 0xD0000000-0xD7FFFFFF PCI bus OK
 0xD0000000-0xD7FFFFFF DEC 21154 PCI to PCI bridge OK
 0xD0000000-0xD7FFFFFF Mylex eXtremeRAID 2000 Controller OK
 0xD4000000-0xD63FFFFF DEC 21154 PCI to PCI bridge OK
 0xD4000000-0xD63FFFFF Mylex eXtremeRAID 2000 Controller OK
 0xCE000000-0xCFFFFFFF DEC 21154 PCI to PCI bridge OK
 0xCE000000-0xCFFFFFFF Mylex eXtremeRAID 2000 Controller OK

[Components]

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description	Status	File
		Version Size Creation Date		
		c:\windows\system32\l3codeca.acm		Fraunhofer Institut Integrierte Schaltungen IIS Fraunhofer IIS MPEG Layer-3 Codec OK
		C:\WINDOWS\system32\L3CODECA.ACM	1, 9, 0, 0305	
		284.00 KB (290,816 bytes)	11/15/2002 7:00 AM	
		c:\windows\system32\msg723.acm		Microsoft Corporation
		C:\WINDOWS\system32\MSG723.ACM	4.4.4000	116.00 KB (118,784 bytes)
		1/27/2003 5:31 PM		
		c:\windows\system32\sl_anet.acm		Sipro Lab Telecom Inc.
		Sipro Lab Telecom Audio Codec		
		C:\WINDOWS\system32\SL_ANET.ACM	3.02	84.00 KB (86,016 bytes)
		11/15/2002 7:00 AM		
		c:\windows\system32\msadp32.acm		Microsoft Corporation
		C:\WINDOWS\system32\MSADP32.ACM	5.2.3718.0	
		(dnsvr.021114-1947)	14.50 KB (14,848 bytes)	11/15/2002 7:00 AM
		c:\windows\system32\imaadp32.acm		Microsoft Corporation
		C:\WINDOWS\system32\IMAADP32.ACM	5.2.3718.0	
		(dnsvr.021114-1947)	15.50 KB (15,872 bytes)	11/15/2002 7:00 AM
		c:\windows\system32\msaud32.acm		Microsoft Corporation
		Windows Media Audio Codec		
		C:\WINDOWS\system32\MSAUD32.ACM	8.00.00.4487	288.00 KB (294,912 bytes)
		11/15/2002 7:00 AM		
		c:\windows\system32\tsoft32.acm		DSP GROUP, INC.
		C:\WINDOWS\system32\TSOFT32.ACM	1.01	9.50 KB (9,728 bytes)
		11/15/2002 7:00 AM		
		c:\windows\system32\msg711.acm		Microsoft Corporation
		C:\WINDOWS\system32\MSG711.ACM	5.2.3718.0	
		(dnsvr.021114-1947)	10.00 KB (10,240 bytes)	11/15/2002 7:00 AM

c:\windows\system32\msgsm32.acm Microsoft Corporation
 OK C:\WINDOWS\system32\MSGSM32.ACM 5.2.3718.0
 (dnsvr.021114-1947) 20.50 KB (20,992 bytes) 11/15/2002 7:00 AM

[Video Codecs]

CODEC	Manufacturer	Description	Status	File
Version	Size	Creation Date		
c:\windows\system32\msh263.drv	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSH263.DRV	4.4.4000	284.00 KB	(290,816 bytes) 11/15/2002 10:34 AM
c:\windows\system32\msh261.drv	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSH261.DRV	4.4.4000	180.00 KB	(184,320 bytes) 1/27/2003 5:31 PM
c:\windows\system32\msrle32.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSRLE32.DLL	5.2.3718.0		(dnsvr.021114-1947) 10.50 KB (10,752 bytes) 11/15/2002 7:00 AM
c:\windows\system32\tsbyuv.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\TSBYUV.DLL	5.2.3718.0		(dnsvr.021114-1947) 8.00 KB (8,192 bytes) 11/15/2002 10:36 AM
c:\windows\system32\msvidc32.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSVIDC32.DLL	5.2.3718.0		(dnsvr.021114-1947) 26.50 KB (27,136 bytes) 11/15/2002 7:00 AM
c:\windows\system32\iccvid.dll	Radius Inc.			
OK	C:\WINDOWS\system32\ICCVID.DLL	1.10.0.6	108.00 KB	(110,592 bytes) 11/15/2002 7:00 AM
c:\windows\system32\ir32_32.dll	Not Available		OK	
C:\WINDOWS\system32\IR32_32.DLL	Not Available		194.50 KB	(199,168 bytes) 11/15/2002 7:00 AM
c:\windows\system32\iyuv_32.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\IYUV_32.DLL	5.2.3718.0		(dnsvr.021114-1947) 45.00 KB (46,080 bytes) 11/15/2002 10:35 AM
c:\windows\system32\msyuv.dll	Microsoft Corporation			
OK	C:\WINDOWS\system32\MSYUV.DLL	5.2.3718.0		(dnsvr.021114-1947) 16.50 KB (16,896 bytes) 11/15/2002 10:35 AM

[CD-ROM]

Item	Value
Drive	D:
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	LG CD-ROM CRN-8245B
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROMLG_CD-ROM_CRN-8245B_____1.13____\5 &326853DD&0&0.0.0
Driver	c:\windows\system32\drivers\cdrom.sys (5.2.3718.0 (dnsvr.021114-1947), 47.38 KB (48,512 bytes), 11/15/2002 7:00 AM)

[Sound Device]

Item	Value
------	-------

[Display]

Item	Value
Name	S3 Graphics Inc. Savage4 (Microsoft Corporation)
PNP Device ID	PCI\VEN_5333&DEV_8A22&SUBSYS_01C51014&REV_06\3&267A616A &0&08
Adapter Type	S3 Savage4, S3 Graphics, Inc. compatible
Adapter Description	S3 Graphics Inc. Savage4 (Microsoft Corporation)
Adapter RAM	8.00 MB (8,388,608 bytes)

Item	Value
Installed Drivers	S3gsav4.dll
Driver Version	6.13.10.8013-13.95.13
INF File	s3gsav4.inf (S3SAVAGE4 section)
Color Planes	1
Color Table Entries	4294967296
Resolution	800 x 600 x 60 hertz
Bits/Pixel	32
Memory Address	0xFBFB80000-0xFBFFFFFFF
Memory Address	0xF00000000-0xF7FFFFFFF
I/O Port	0x000003B0-0x000003BB
I/O Port	0x000003C0-0x000003DF
Memory Address	0xA0000-0xBFFFF
Driver	c:\windows\system32\drivers\s3gsav4m.sys (6.13.10.8013-13.95.13, 135.63 KB (138,880 bytes), 1/27/2003 12:06 PM)

[Infrared]

Item	Value
------	-------

[Input]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&23FD4C84&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1
Driver	c:\windows\system32\drivers\i804prt.sys (5.2.3718.0 (dnsvr.021114-1947), 50.63 KB (51,840 bytes), 11/15/2002 7:00 AM)

[Pointing Device]

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	3
Status	OK
PNP Device ID	ACPI\PNP0F13\4&23FD4C84&0
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
IRQ Channel	IRQ 12
Driver	c:\windows\system32\drivers\i804prt.sys (5.2.3718.0 (dnsvr.021114-1947), 50.63 KB (51,840 bytes), 11/15/2002 7:00 AM)

[Modem]

Item	Value
------	-------

[Network]

[Adapter]

Item	Value
Name	[00000001] IBM Netfinity 10/100 Ethernet Adapter
Adapter Type	Ethernet 802.3
Product Type	IBM Netfinity 10/100 Ethernet Adapter
Installed	Yes

PNP Device ID
 PCI\VEN_8086&DEV_1229&SUBSYS_024D1014&REV_08\3&267A616A&0&18
 Last Reset 2/26/2003 8:28 AM
 Index 1
 Service Name E100B
 IP Address 192.168.132.200
 IP Subnet 255.255.255.0
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:02:55:AC:20:56
 Memory Address 0xFBF7F000-0xFBF7FFFF
 I/O Port 0x00001880-0x000018BF
 Memory Address 0xFBE00000-0xFBEFFFFFF
 IRQ Channel IRQ 42
 Driver c:\windows\system32\drivers\le100bnt5.sys (6.04.14.0000, 138.27 KB (141,584 bytes), 9/25/2002 7:06 AM)

Name [00000002] RAS Async Adapter
 Adapter Type Not Available
 Product Type RAS Async Adapter
 Installed Yes
 PNP Device ID Not Available
 Last Reset 2/26/2003 8:28 AM
 Index 2
 Service Name AsyncMac
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

Name [00000003] WAN Miniport (L2TP)
 Adapter Type Not Available
 Product Type WAN Miniport (L2TP)
 Installed Yes
 PNP Device ID ROOT\MS_L2TPMINIPOINT\0000
 Last Reset 2/26/2003 8:28 AM
 Index 3
 Service Name Rasl2tp
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\rasl2tp.sys (5.2.3718.0 (dnsrv.021114-1947), 61.63 KB (63,104 bytes), 11/15/2002 7:00 AM)

Name [00000004] WAN Miniport (PPTP)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPTP)
 Installed Yes
 PNP Device ID ROOT\MS_PPTPMINIPOINT\0000
 Last Reset 2/26/2003 8:28 AM
 Index 4
 Service Name PptpMiniport
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available

DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 50:50:54:50:30:30
 Driver c:\windows\system32\drivers\rasppptp.sys (5.2.3718.0 (dnsrv.021114-1947), 56.63 KB (57,984 bytes), 11/15/2002 7:00 AM)

Name [00000005] WAN Miniport (PPPOE)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPPOE)
 Installed Yes
 PNP Device ID ROOT\MS_PPPOEMINIPOINT\0000
 Last Reset 2/26/2003 8:28 AM
 Index 5
 Service Name RasPppoe
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 33:50:6F:45:30:30
 Driver c:\windows\system32\drivers\raspppoe.sys (5.2.3718.0 (dnsrv.021114-1947), 36.88 KB (37,760 bytes), 11/15/2002 7:00 AM)

Name [00000006] Direct Parallel
 Adapter Type Not Available
 Product Type Direct Parallel
 Installed Yes
 PNP Device ID ROOT\MS_PTMINIPOINT\0000
 Last Reset 2/26/2003 8:28 AM
 Index 6
 Service Name Raspti
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\raspti.sys (5.2.3718.0 (dnsrv.021114-1947), 16.38 KB (16,768 bytes), 11/15/2002 7:00 AM)

Name [00000007] WAN Miniport (IP)
 Adapter Type Not Available
 Product Type WAN Miniport (IP)
 Installed Yes
 PNP Device ID ROOT\MS_NDISWANIP\0000
 Last Reset 2/26/2003 8:28 AM
 Index 7
 Service Name NdisWan
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\ndiswan.sys (5.2.3718.0 (dnsrv.021114-1947), 87.25 KB (89,344 bytes), 11/15/2002 7:00 AM)

Name [00000008] Intel(R) PRO/1000 XT Server Adapter
 Adapter Type Not Available
 Product Type Intel(R) PRO/1000 XT Server Adapter

Installed Yes
 PNP Device ID Not Available
 Last Reset 2/26/2003 8:28 AM
 Index 8
 Service Name E1000
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

[Protocol]

Item Value
 Name MSAFD Tcpip [TCP/IP]
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 16 bytes
 Maximum Message Size 0 bytes
 Message Oriented No
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data Yes
 Supports Graceful Closing Yes
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD Tcpip [UDP/IP]
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 16 bytes
 Maximum Message Size 63.93 KB (65,467 bytes)
 Message Oriented Yes
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting Yes

Name RSVP UDP Service Provider
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 16 bytes
 Maximum Message Size 63.93 KB (65,467 bytes)
 Message Oriented Yes
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption Yes
 Supports Expedited Data No
 Supports Graceful Closing No

Supports Guaranteed Bandwidth No
 Supports Multicasting Yes

Name RSVP TCP Service Provider
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 16 bytes
 Maximum Message Size 0 bytes
 Message Oriented No
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption Yes
 Supports Expedited Data Yes
 Supports Graceful Closing Yes
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{DF5D143D-63A5-4591-8FE0-77F9C12B74BE}]
 SEQPACKET 3
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)
 Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{DF5D143D-63A5-4591-8FE0-77F9C12B74BE}]
 DATAGRAM 3
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)
 Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{9FA920CC-9739-4F7D-B154-396C44C90D3C}]
 SEQPACKET 0
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 20 bytes

Maximum Message Size 62.50 KB (64,000 bytes)
 Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{9FA920CC-9739-4F7D-B154-396C44C90D3C}]
 DATAGRAM 0
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)
 Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{170F36E7-D9C9-45CC-B817-E06FB22EC333}]
 SEQPACKET 1
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)
 Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{170F36E7-D9C9-45CC-B817-E06FB22EC333}]
 DATAGRAM 1
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)
 Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No

Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{7EC8EE0F-4C3E-4058-B73F-26142B6804D0}]
 SEQPACKET 2
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)
 Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{7EC8EE0F-4C3E-4058-B73F-26142B6804D0}]
 DATAGRAM 2
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 20 bytes
 Maximum Message Size 62.50 KB (64,000 bytes)
 Message Oriented Yes
 Minimum Address Size 20 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

[WinSock]

Item	Value
File	c:\windows\system32\winsock.dll
Size	2.80 KB (2,864 bytes)
Version	3.10
File	c:\windows\system32\wsock32.dll
Size	22.00 KB (22,528 bytes)
Version	5.2.3718.0 (dnsrv.021114-1947)

[Ports]

[Serial]

Item	Value
------	-------

[Parallel]

Item	Value
------	-------

[Storage]

[Drives]

Item Value
 Drive A:
 Description 3 1/2 Inch Floppy Drive

Drive C:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 16.94 GB (18,186,059,776 bytes)
 Free Space 13.40 GB (14,388,998,144 bytes)
 Volume Name
 Volume Serial Number 14CC2106

Drive D:
 Description CD-ROM Disc

Drive E:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive F:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive G:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive H:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive I:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive J:

Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive S:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 195.32 GB (209,719,930,880 bytes)
 Free Space 40.55 GB (43,544,993,792 bytes)
 Volume Name Backup1_2_0
 Volume Serial Number B0F0B35B

Drive T:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 195.32 GB (209,719,930,880 bytes)
 Free Space 39.87 GB (42,810,241,024 bytes)
 Volume Name Backup2_2_0
 Volume Serial Number FC95FF89

Drive X:
 Description Network Connection
 Provider Name \\192.168.132.253\e\$

Drive Y:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 195.32 GB (209,719,930,880 bytes)
 Free Space 45.22 GB (48,556,199,936 bytes)
 Volume Name Backup_cool1
 Volume Serial Number E843E8D0

Drive Z:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 195.32 GB (209,719,930,880 bytes)
 Free Space 45.24 GB (48,581,369,856 bytes)
 Volume Name Backup_cool2
 Volume Serial Number 545D0229

[Disks]

Item Value
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model IBM-ESXS ST318305LC !# SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 2
 SCSI Target ID 12
 Sectors/Track 63
 Size 16.94 GB (18,194,319,360 bytes)
 Total Cylinders 2,212
 Total Sectors 35,535,780
 Total Tracks 564,060
 Tracks/Cylinder 255

Partition Disk #0, Partition #0
Partition Size 16.94 GB (18,186,061,824 bytes)
Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE3
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 2
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 5
SCSI Target ID 0
Sectors/Track 63
Size 592.54 GB (636,233,633,280 bytes)
Total Cylinders 77,351
Total Sectors 1,242,643,815
Total Tracks 19,724,505
Tracks/Cylinder 255

Partition Disk #3, Partition #0
Partition Size 53.76 GB (57,724,982,784 bytes)
Partition Starting Offset 8,257,536 bytes
Partition Disk #3, Partition #1
Partition Size 195.32 GB (209,719,931,904 bytes)
Partition Starting Offset 57,733,272,576 bytes

Description \\.\PHYSICALDRIVE5
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 2
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 7
SCSI Target ID 0
Sectors/Track 63
Size 592.54 GB (636,233,633,280 bytes)
Total Cylinders 77,351
Total Sectors 1,242,643,815
Total Tracks 19,724,505
Tracks/Cylinder 255

Partition Disk #5, Partition #0
Partition Size 53.76 GB (57,724,982,784 bytes)
Partition Starting Offset 8,257,536 bytes
Partition Disk #5, Partition #1
Partition Size 195.32 GB (209,719,931,904 bytes)
Partition Starting Offset 57,733,272,576 bytes

Description \\.\PHYSICALDRIVE4
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 2
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 6
SCSI Target ID 0
Sectors/Track 63
Size 829.55 GB (890,723,796,480 bytes)
Total Cylinders 108,291
Total Sectors 1,739,694,915
Total Tracks 27,614,205

Tracks/Cylinder 255
Partition Disk #4, Partition #0
Partition Size 73.29 GB (78,699,446,784 bytes)
Partition Starting Offset 8,257,536 bytes
Partition Disk #4, Partition #1
Partition Size 195.32 GB (209,719,931,904 bytes)
Partition Starting Offset 78,707,736,576 bytes

Description \\.\PHYSICALDRIVE1
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 1
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 3
SCSI Target ID 2
Sectors/Track 63
Size 135.53 GB (145,521,653,760 bytes)
Total Cylinders 17,692
Total Sectors 284,221,980
Total Tracks 4,511,460
Tracks/Cylinder 255

Partition Disk #1, Partition #0
Partition Size 117.24 GB (125,887,878,144 bytes)
Partition Starting Offset 8,257,536 bytes

Description \\.\PHYSICALDRIVE2
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 2
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 4
SCSI Target ID 0
Sectors/Track 63
Size 829.55 GB (890,723,796,480 bytes)
Total Cylinders 108,291
Total Sectors 1,739,694,915
Total Tracks 27,614,205
Tracks/Cylinder 255

Partition Disk #2, Partition #0
Partition Size 73.29 GB (78,699,446,784 bytes)
Partition Starting Offset 8,257,536 bytes
Partition Disk #2, Partition #1
Partition Size 195.32 GB (209,719,931,904 bytes)
Partition Starting Offset 78,707,736,576 bytes

Description \\.\PHYSICALDRIVE6
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 1
SCSI Bus 4
SCSI Logical Unit 0
SCSI Port 8
SCSI Target ID 0
Sectors/Track 63
Size 711.04 GB (763,478,714,880 bytes)
Total Cylinders 92,821
Total Sectors 1,491,169,365

Total Tracks 23,669,355
 Tracks/Cylinder 255
 Partition Disk #6, Partition #0
 Partition Size 127.01 GB (136,375,110,144 bytes)
 Partition Starting Offset 8,257,536 bytes

[SCSI]

Item Value
 Name Adaptec AIC-7892 Ultra160 PCI SCSI Card
 Manufacturer Adaptec
 Status OK
 PNP Device ID
 PCI\VEN_9005&DEV_008F&SUBSYS_02011014&REV_02\3&267A616A&0&20
 I/O Port 0x00001900-0x000019FF
 Memory Address 0xFBF7E000-0xFBF7EFFF
 IRQ Channel IRQ 41
 Driver c:\windows\system32\drivers\adpu160m.sys (RTC_XP07 (lab01_n(storbuild).010917-1031), 99.63 KB (102,016 bytes), 1/28/2003 11:52 AM)

Name Mylex eXtremeRAID 2000 Disk Array Controller
 Manufacturer Mylex
 Status OK
 PNP Device ID
 PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&1138865F&0&4008
 Memory Address 0xE0000000-0xEFFFFFFF
 I/O Port 0x00007000-0x00007FFF
 Memory Address 0xD8000000-0xDFFFFFFF
 IRQ Channel IRQ 43
 Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller
 Manufacturer Mylex
 Status OK
 PNP Device ID
 PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&30418910&0&4010
 Memory Address 0xE4000000-0xE63FFFFFFF
 I/O Port 0x00006000-0x00006FFF
 Memory Address 0xDA000000-0xDBFFFFFFF
 IRQ Channel IRQ 24
 Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller
 Manufacturer Mylex
 Status OK
 PNP Device ID
 PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&1A9D83F&0&4018
 Memory Address 0xE8000000-0xEA3FFFFFFF
 I/O Port 0x00005000-0x00005FFF
 Memory Address 0xDC000000-0xDDFFFFFFF
 IRQ Channel IRQ 19
 Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller
 Manufacturer Mylex
 Status OK
 PNP Device ID
 PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&20B2DAF0&0&4020
 Memory Address 0xEC000000-0xEE3FFFFFFF

I/O Port 0x00004000-0x00007FFF
 Memory Address 0xDE000000-0xDFFFFFFF
 IRQ Channel IRQ 20
 Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller
 Manufacturer Mylex
 Status OK
 PNP Device ID
 PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&235BDD1F&0&4008
 Memory Address 0xD0000000-0xD7FFFFFFF
 I/O Port 0x00003000-0x00003FFF
 Memory Address 0xCC000000-0xCFFFFFFF
 IRQ Channel IRQ 29
 Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

Name Mylex eXtremeRAID 2000 Controller
 Manufacturer Mylex
 Status OK
 PNP Device ID
 PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&6CA15C9&0&4010
 Memory Address 0xD4000000-0xD63FFFFFFF
 I/O Port 0x00002000-0x00003FFF
 Memory Address 0xCE000000-0xCFFFFFFF
 IRQ Channel IRQ 33
 Driver c:\windows\system32\drivers\dac2w2k.sys (80.00-01 built by: WinDDK, 170.50 KB (174,592 bytes), 1/18/2002 1:31 PM)

[IDE]

Item Value
 Name OSB4 IDE Controller
 Manufacturer ServerWorks
 Status OK
 PNP Device ID
 PCI\VEN_1166&DEV_0211&SUBSYS_00000000&REV_00\3&267A616A&0&79
 I/O Port 0x00000700-0x000007FF
 Driver c:\windows\system32\drivers\pciide.sys (5.2.3718.0 (dnsrv.021114-1947), 3.50 KB (3,584 bytes), 11/15/2002 7:00 AM)

Name Primary IDE Channel
 Manufacturer (Standard IDE ATA/ATAPI controllers)
 Status OK
 PNP Device ID PCI\IDE\IDECHANNEL\4&23727F60&0&0
 I/O Port 0x000001F0-0x000001F7
 I/O Port 0x000003F6-0x000003F6
 IRQ Channel IRQ 14
 Driver c:\windows\system32\drivers\atapi.sys (5.2.3718.0 (dnsrv.021114-1947), 90.50 KB (92,672 bytes), 11/15/2002 7:00 AM)

Name Secondary IDE Channel
 Manufacturer (Standard IDE ATA/ATAPI controllers)
 Status OK
 PNP Device ID PCI\IDE\IDECHANNEL\4&23727F60&0&1
 I/O Port 0x00000170-0x00000177
 I/O Port 0x00000376-0x00000376
 Driver c:\windows\system32\drivers\atapi.sys (5.2.3718.0 (dnsrv.021114-1947), 90.50 KB (92,672 bytes), 11/15/2002 7:00 AM)

[Printing]

Name Driver Port Name Server Name

[Problem Devices]

Device PNP Device ID Error Code
 Not Available ACPI\IBM37D42&DABA3FF&0 The drivers
 for this device are not installed.

[USB]

Device PNP Device ID
 ServerWorks (RCC) PCI to USB Open Host Controller
 PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_04\3&267A616A&
 0&7A
 USB Root Hub USB\ROOT_HUB\4&372644EA&0

[Software Environment]

[System Drivers]

Name	Description	File	Type	Started	Start Mode
State	Status	Error Control	Accept Pause		Accept Stop
abiosdsk	Abiosdsk	Not Available	Kernel Driver	No	No
Disabled	Stopped	OK Ignore	No	No	
acpi	Microsoft ACPI Driver				
c:\windows\system32\drivers\acpi.sys			Kernel Driver	Yes	
Boot	Running	OK Normal	No	Yes	
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel		
Driver	No	Disabled Stopped	OK Normal	No	
No					
adpu160m	adpu160m	c:\windows\system32\drivers\adpu160m.sys	Kernel		
Driver	Yes	Boot Running	OK Normal	No	
Yes					
adpu320	adpu320	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
afcnt	afcnt	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
afd	AFD Networking Support Environment				
c:\windows\system32\drivers\afd.sys			Kernel Driver	Yes	
Auto	Running	OK Normal	No	Yes	
aha154x	Aha154x	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
aic78u2	aic78u2	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
aic78xx	aic78xx	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
aliide	Aliide	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
asynmac	RAS Asynchronous Media Driver				
c:\windows\system32\drivers\asynmac.sys			Kernel Driver	No	
Manual	Stopped	OK Normal	No	No	
atapi	Standard IDE/ESDI Hard Disk Controller				
c:\windows\system32\drivers\atapi.sys			Kernel Driver	Yes	
Boot	Running	OK Normal	No	Yes	
atdisk	Atdisk	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Ignore	No	No	
atmarpc	ATM ARP Client Protocol				
c:\windows\system32\drivers\atmarpc.sys			Kernel Driver	No	
Manual	Stopped	OK Normal	No	No	
audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys			
Kernel Driver	Yes	Manual Running	OK Normal		
No	Yes				
beep	Beep	c:\windows\system32\drivers\beep.sys	Kernel		
Driver	Yes	System Running	OK Normal	No	
Yes					
cbidf2k	cbidf2k	c:\windows\system32\drivers\cbidf2k.sys	Kernel		
Driver	No	Disabled Stopped	OK Normal	No	
No					

cd20xrnt	cd20xrnt	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys			File System
Driver	Yes	Disabled Running	OK Normal	No	
Yes					
cdrom	CD-ROM Driver				
c:\windows\system32\drivers\cdrom.sys					
Kernel Driver	Yes	System Running	OK Normal		
No	Yes				
changer	Changer	Not Available	Kernel Driver	No	
System	Stopped	OK Ignore	No	No	
clusdisk	Cluster Disk Driver				
c:\windows\system32\drivers\clusdisk.sys					
Kernel Driver	No	Disabled Stopped	OK Normal		
No	No				
cmdide	CmdIde	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
cpqarray	Cpqarray	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
cpqarry2	cpqarry2	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
cpqcissm	cpqcissm	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
cpqfcalm	cpqfcalm	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
credisk	CRC Disk Filter Driver				
c:\windows\system32\drivers\credisk.sys			Kernel Driver	Yes	
Boot	Running	OK Normal	No	Yes	
dac2w2k	dac2w2k	c:\windows\system32\drivers\dac2w2k.sys	Kernel		
Driver	Yes	Boot Running	OK Normal	No	
Yes					
dac960nt	dac960nt	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
dfsdriver	DfsDriver				
c:\windows\system32\drivers\dfs.sys					File System
Driver	Yes	Boot Running	OK Normal	No	
Yes					
disk	Disk Driver				
c:\windows\system32\drivers\disk.sys					
Kernel Driver	Yes	Boot Running	OK Normal		
No	Yes				
dmboot	dmboot	c:\windows\system32\drivers\dmboot.sys	Kernel		
Driver	No	Disabled Stopped	OK Normal	No	
No					
dmio	Logical Disk Manager Driver				
c:\windows\system32\drivers\dmio.sys			Kernel Driver	Yes	
Boot	Running	OK Normal	No	Yes	
dmload	dmload	c:\windows\system32\drivers\dmload.sys	Kernel		
Driver	Yes	Boot Running	OK Normal	No	
Yes					
dpti2o	dpti2o	Not Available	Kernel Driver	No	
Disabled	Stopped	OK Normal	No	No	
e1000	Intel(R) PRO/1000 Device Driver				
c:\windows\system32\drivers\le1000325.sys			Kernel Driver	No	
Manual	Stopped	OK Normal	No	No	
e100b	Intel(R) PRO Adapter Driver				
c:\windows\system32\drivers\le100bnt5.sys			Kernel Driver	Yes	
Manual	Running	OK Normal	No	Yes	
fastfat	Fastfat	c:\windows\system32\drivers\fastfat.sys			File System
Driver	No	Disabled Stopped	OK Normal	No	
No					
fdc	Floppy Disk Controller Driver				
c:\windows\system32\drivers\fdc.sys			Kernel Driver	Yes	
Manual	Running	OK Normal	No	Yes	
fips	Fips	c:\windows\system32\drivers\lfips.sys	Kernel		
Driver	Yes	System Running	OK Normal	No	
Yes					
flpydisk	Floppy Disk Driver				
c:\windows\system32\drivers\flpydisk.sys					
Kernel Driver	Yes	Manual Running	OK Normal		
No	Yes				

ftdisk	Volume Manager Driver											
c:\windows\system32\drivers\ftdisk.sys	Kernel Driver	Yes										
boot	Running	OK	Normal	No	Yes							
gpc	Generic Packet Classifier											
c:\windows\system32\drivers\msgpc.sys	Kernel Driver	Yes										
Manual	Running	OK	Normal	No	Yes							
hpn	hpn	Not Available										
Disabled	Stopped	OK	Normal	No	No							
hpt3xx	hpt3xx	Not Available										
Disabled	Stopped	OK	Normal	No	No							
http	HTTP	c:\windows\system32\drivers\http.sys		Kernel								
Driver	No	Manual	Stopped	OK	Normal	No						
No												
i2omgmt	i2omgmt	Not Available										
System	Stopped	OK	Normal	No	No							
i2omp	i2omp	Not Available										
Disabled	Stopped	OK	Normal	No	No							
i8042prt	i8042	Keyboard and PS/2 Mouse		Port Driver								
c:\windows\system32\drivers\i8042prt.sys	Kernel Driver	Yes										
System	Running	OK	Normal	No	Yes							
iirsp	iirsp	Not Available										
Disabled	Stopped	OK	Normal	No	No							
imapi	CD-Burning Filter Driver											
c:\windows\system32\drivers\imapi.sys	Kernel Driver	No										
System	Stopped	OK	Normal	No	No							
intelide	IntelIde	Not Available										
Disabled	Stopped	OK	Normal	No	No							
ipfilterdriver	IP Traffic Filter Driver											
c:\windows\system32\drivers\ipfltdrv.sys	Kernel Driver	No										
Manual	Stopped	OK	Normal	No	No							
ipinip	IP in IP Tunnel Driver		c:\windows\system32\drivers\ipinip.sys		Kernel Driver	No	Normal					
Kernel Driver	No	Manual	Stopped	OK	Normal							
No												
ipnat	IP Network Address Translator											
c:\windows\system32\drivers\ipnat.sys	Kernel Driver	No										
Manual	Stopped	OK	Normal	No	No							
ipsec	IPSEC driver	c:\windows\system32\drivers\ipsec.sys										
Kernel Driver	Yes	System	Running	OK	Normal							
No	Yes											
ipsraidn	ipsraidn	Not Available										
Disabled	Stopped	OK	Normal	No	No							
isapnp	PnP ISA/EISA Bus Driver											
c:\windows\system32\drivers\isapnp.sys	Kernel Driver	Yes										
Boot	Running	OK	Critical	No	Yes							
kbdclass	Keyboard Class Driver											
c:\windows\system32\drivers\kbdclass.sys	Kernel Driver	Yes										
System	Running	OK	Normal	No	Yes							
ksecdd	KSecDD	c:\windows\system32\drivers\ksecdd.sys		Kernel								
Driver	Yes	Boot	Running	OK	Normal	No						
Yes												
lp6nds35	lp6nds35	Not Available										
Disabled	Stopped	OK	Normal	No	No							
macdisk	macdisk	c:\windows\system32\drivers\mac2w2k.sys		Kernel								
Driver	Yes	Boot	Running	OK	Normal	No						
Yes												
mmdd	mmdd	c:\windows\system32\drivers\mmdd.sys		Kernel								
Driver	Yes	System	Running	OK	Ignore	No						
Yes												
modem	Modem	c:\windows\system32\drivers\modem.sys		Kernel								
Driver	No	Manual	Stopped	OK	Ignore	No						
No												
mouclass	Mouse Class Driver		c:\windows\system32\drivers\mouclass.sys		Kernel Driver	No	Normal					
Kernel Driver	Yes	System	Running	OK	Normal							
No	Yes											
mountmgr	Mount Point Manager		c:\windows\system32\drivers\mountmgr.sys		Kernel Driver	No	Normal					
Kernel Driver	Yes	Boot	Running	OK	Normal							
No	Yes											
mraid35x	mraid35x	Not Available										
Disabled	Stopped	OK	Normal	No	No							
mrxdav	WebDav Client Redirector											
c:\windows\system32\drivers\mrxdav.sys	File System Driver	No										
Manual	Stopped	OK	Normal	No	No							
mrxsmb	MRXSMB	c:\windows\system32\drivers\mrxsmb.sys		File System								
Driver	Yes	System	Running	OK	Normal	No						
Yes												
msfs	Msfs	c:\windows\system32\drivers\msfs.sys		File System								
Driver	Yes	System	Running	OK	Normal	No						
Yes												
mup	Mup	c:\windows\system32\drivers\mup.sys		File System								
Driver	Yes	Boot	Running	OK	Normal	No						
Yes												
ndis	NDIS System Driver		c:\windows\system32\drivers\ndis.sys		Kernel Driver	No	Normal					
Kernel Driver	Yes	Boot	Running	OK	Normal							
No	Yes											
ndistapi	Remote Access NDIS TAPI Driver											
c:\windows\system32\drivers\ndistapi.sys	Kernel Driver	Yes										
Manual	Running	OK	Normal	No	Yes							
ndisuio	NDIS Usermode I/O Protocol											
c:\windows\system32\drivers\ndisuio.sys	Kernel Driver	No										
Manual	Stopped	OK	Normal	No	No							
ndiswan	Remote Access NDIS WAN Driver											
c:\windows\system32\drivers\ndiswan.sys	Kernel Driver	Yes										
Manual	Running	OK	Normal	No	Yes							
ndproxy	NDIS Proxy		c:\windows\system32\drivers\ndproxy.sys		Kernel Driver	No	Normal					
Kernel Driver	Yes	Manual	Running	OK	Normal							
No	Yes											
netbios	NetBIOS Interface		c:\windows\system32\drivers\netbios.sys		File System Driver	No	Normal					
File System Driver	Yes	System	Running	OK	Normal							
No	Yes											
netbt	NetBios over Tcpip											
c:\windows\system32\drivers\netbt.sys	Kernel Driver	Yes										
Kernel Driver	Yes	System	Running	OK	Normal							
No	Yes											
nfrd960	nfrd960	Not Available										
Disabled	Stopped	OK	Normal	No	No							
npfs	Npfs	c:\windows\system32\drivers\npfs.sys		File System								
Driver	Yes	System	Running	OK	Normal	No						
Yes												
ntfs	Ntfs	c:\windows\system32\drivers\ntfs.sys		File System								
Driver	Yes	Disabled	Running	OK	Normal	No						
Yes												
null	Null		c:\windows\system32\drivers\null.sys		Kernel							
Driver	Yes	System	Running	OK	Normal	No						
Yes												
parport	Parport	c:\windows\system32\drivers\parport.sys		Kernel								
Driver	No	Manual	Stopped	OK	Ignore	No						
No												
partmgr	Partition Manager		c:\windows\system32\drivers\partmgr.sys		Kernel Driver	No	Normal					
Kernel Driver	Yes	Boot	Running	OK	Normal							
No	Yes											
pci	PCI Bus Driver											
c:\windows\system32\drivers\pci.sys	Kernel Driver	Yes										
Kernel Driver	Yes	Boot	Running	OK	Critical							
No	Yes											
pciide	PCIIde	c:\windows\system32\drivers\pciide.sys		Kernel								
Driver	Yes	Boot	Running	OK	Normal	No						
Yes												
pcmcia	Pcmcia	c:\windows\system32\drivers\pcmcia.sys		Kernel								
Driver	No	Disabled	Stopped	OK	Normal	No						
No												
pdcomp	PDCOMP	Not Available										
Manual	Stopped	OK	Ignore	No	No							
pdframe	PDFRAME	Not Available		Kernel Driver								
No	Manual	Stopped	OK	Ignore	No	No						
pdreli	PDRELI	Not Available										
Manual	Stopped	OK	Ignore	No	No							

pdframe	PDRFRAME	Not Available		Kernel Driver		
No	Manual	Stopped	OK	Ignore	No	No
perc2	perc2	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
perc2hib	perc2hib	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
pptpminiport	WAN Miniport (PPTP)					
c:\windows\system32\drivers\raspptp.sys	Kernel Driver		Yes			
Manual	Running	OK	Normal	No	Yes	
processor	Processor Driver	c:\windows\system32\drivers\processr.sys		Kernel Driver		Yes
Kernel Driver	Yes	Manual	Running	OK	Normal	
No	Yes					
ptilink	Direct Parallel Link Driver					
c:\windows\system32\drivers\ptilink.sys	Kernel Driver		Yes			
Manual	Running	OK	Normal	No	Yes	
ql1080	ql1080	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
ql10wnt	ql10wnt	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
ql12160	ql12160	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
ql1240	ql1240	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
ql1280	ql1280	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
ql2100	ql2100	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
ql2200	ql2200	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
ql2300	ql2300	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
rasacd	Remote Access Auto Connection Driver					
c:\windows\system32\drivers\rasacd.sys	Kernel Driver		Yes			
System	Running	OK	Normal	No	Yes	
rasl2tp	WAN Miniport (L2TP)					
c:\windows\system32\drivers\rasl2tp.sys	Kernel Driver		Yes			
Manual	Running	OK	Normal	No	Yes	
rasppoe	Remote Access PPPOE Driver					
c:\windows\system32\drivers\rasppoe.sys	Kernel Driver		Yes			
Manual	Running	OK	Normal	No	Yes	
raspti	Direct Parallel	c:\windows\system32\drivers\raspti.sys		Kernel Driver		Yes
Kernel Driver	Yes	Manual	Running	OK	Normal	
No	Yes					
rdbss	Rdbss	c:\windows\system32\drivers\rdbss.sys		File System		Yes
Driver	Yes	System	Running	OK	Normal	No
Yes						
rdpdd	RDPCDD	c:\windows\system32\drivers\rdpdd.sys		Kernel		No
Driver	Yes	System	Running	OK	Ignore	No
Yes						
rdpdr	Terminal Server Device Redirector Driver					
c:\windows\system32\drivers\rdpdr.sys	Kernel Driver		Yes			
Manual	Running	OK	Normal	No	Yes	
rdpwd	RDPWD	c:\windows\system32\drivers\rdpwd.sys		Kernel		No
Driver	No	Manual	Stopped	OK	Ignore	No
No						
redbook	Digital CD Audio Playback Filter Driver					
c:\windows\system32\drivers\redbook.sys	Kernel Driver		Yes			
System	Running	OK	Normal	No	Yes	
s3savage4	S3SAVAGE4	c:\windows\system32\drivers\s3gsav4m.sys		Kernel Driver		No
Kernel Driver	Yes	Manual	Running	OK	Ignore	No
No	Yes					
secdrv	Secdrv	c:\windows\system32\drivers\secdrv.sys		Kernel		No
Driver	No	Manual	Stopped	OK	Normal	No
No						
serial	Serial	c:\windows\system32\drivers\serial.sys		Kernel		No
Driver	No	Auto	Stopped	OK	Ignore	No
No						
sfloppy	Sfloppy	c:\windows\system32\drivers\sfloppy.sys		Kernel		No
Driver	No	System	Stopped	OK	Ignore	No
No						
simbad	Simbad	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
sparrow	Sparrow	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
srv	Srv	c:\windows\system32\drivers\srv.sys		File System		No
Driver	No	Manual	Stopped	OK	Normal	No
No						
swenum	Software Bus Driver	c:\windows\system32\drivers\swenum.sys		Kernel Driver		Yes
Kernel Driver	Yes	Manual	Running	OK	Normal	No
No	Yes					
symc810	symc810	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
symc8xx	symc8xx	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
symmpi	symmpi	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
sym_hi	sym_hi	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
sym_u3	sym_u3	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
tcpip	TCP/IP Protocol Driver					
c:\windows\system32\drivers\tcpip.sys	Kernel Driver		Yes			
System	Running	OK	Normal	No	Yes	
tdpipe	TDPIPE	c:\windows\system32\drivers\tdpipe.sys		Kernel		No
Driver	No	Manual	Stopped	OK	Ignore	No
No						
tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys		Kernel		No
Driver	No	Manual	Stopped	OK	Ignore	No
No						
termdd	Terminal Device Driver					
c:\windows\system32\drivers\termdd.sys	Kernel Driver		Yes			
System	Running	OK	Normal	No	Yes	
toside	TosIde	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
udfs	Udfs	c:\windows\system32\drivers\udfs.sys		File System		No
Driver	No	Disabled	Stopped	OK	Normal	No
No						
ultra	ultra	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
update	Microcode Update Driver					
c:\windows\system32\drivers\update.sys	Kernel Driver		Yes			
Manual	Running	OK	Normal	No	Yes	
usbhub	USB2 Enabled Hub	c:\windows\system32\drivers\usbhub.sys		Kernel Driver		Yes
Kernel Driver	Yes	Manual	Running	OK	Normal	No
No	Yes					
usbohci	Microsoft USB Open Host Controller Miniport Driver					
c:\windows\system32\drivers\usbohci.sys	Kernel Driver		Yes			
Manual	Running	OK	Normal	No	Yes	
vgasave	VGA Display Controller.					
c:\windows\system32\drivers\vga.sys	Kernel Driver		Yes			
System	Running	OK	Ignore	No	Yes	
viaide	Vialde	Not Available		Kernel Driver		No
Disabled	Stopped	OK	Normal	No	No	No
volsnap	Storage volumes	c:\windows\system32\drivers\volsnap.sys		Kernel Driver		Yes
Kernel Driver	Yes	Boot	Running	OK	Normal	No
No	Yes					
wanarp	Remote Access IP ARP Driver					
c:\windows\system32\drivers\wanarp.sys	Kernel Driver		Yes			
Manual	Running	OK	Normal	No	Yes	
wdica	WDICA	Not Available		Kernel Driver		No
Manual	Stopped	OK	Ignore	No	No	No
wlbs	Network Load Balancing					
c:\windows\system32\drivers\wlbs.sys	Kernel Driver		No			
Manual	Stopped	OK	Normal	No	No	No

[Signed Drivers]

Device Name	Signed	Device Class	Driver Version
Driver Date	Manufacturer	INF Name	Driver Name
Device ID			
Not Available	Not Available	Not Available	Not
Available	Not Available	Not Available	Not Available
Not Available	HTREE\ROOT\0		
ACPI Multiprocessor PC	No	COMPUTER	5.2.3718.0
10/1/2002 (Standard computers)	hal.inf	Not Available	
ROOT\ACPI_HAL\0000			
Microsoft ACPI-Compliant System	No	SYSTEM	5.2.3718.0
10/1/2002	Microsoft acpi.inf	Not Available	
ACPI_HAL\PNP0C08\0			
Processor No	PROCESSOR	5.2.3718.0	10/1/2002 (Standard processor types)
	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-X86_FAMILY_15_MODEL_2_0			
Processor No	PROCESSOR	5.2.3718.0	10/1/2002 (Standard processor types)
	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-X86_FAMILY_15_MODEL_2_1			
Processor No	PROCESSOR	5.2.3718.0	10/1/2002 (Standard processor types)
	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-X86_FAMILY_15_MODEL_2_2			
Processor No	PROCESSOR	5.2.3718.0	10/1/2002 (Standard processor types)
	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-X86_FAMILY_15_MODEL_2_3			
Processor No	PROCESSOR	5.2.3718.0	10/1/2002 (Standard processor types)
	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-X86_FAMILY_15_MODEL_2_4			
Processor No	PROCESSOR	5.2.3718.0	10/1/2002 (Standard processor types)
	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-X86_FAMILY_15_MODEL_2_5			
Processor No	PROCESSOR	5.2.3718.0	10/1/2002 (Standard processor types)
	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-X86_FAMILY_15_MODEL_2_6			
Processor No	PROCESSOR	5.2.3718.0	10/1/2002 (Standard processor types)
	cpu.inf	Not Available	
ACPI\GENUINEINTEL_-X86_FAMILY_15_MODEL_2_7			
PCI bus No	SYSTEM	5.2.3718.0	10/1/2002 (Standard system devices)
	machine.inf	Not Available	ACPI\PNP0A03\0
PCI standard host CPU bridge	No	SYSTEM	5.2.3718.0 10/1/2002 (Standard system devices)
	machine.inf	Not Available	
PCI\VEN_1014&DEV_0302&SUBSYS_00000000&REV_02\3&267A616A&0&00			
S3 Graphics Inc. Savage4 (Microsoft Corporation)	No	DISPLAY	6.13.10.8013
8/20/2002	S3 Graphics, Inc.	s3gsav4.inf	
Not Available			
PCI\VEN_5333&DEV_8A22&SUBSYS_01C51014&REV_06\3&267A616A&0&08			
Default Monitor	No	MONITOR	5.1.2001.0 6/6/2001 (Standard monitor types)
	monitor.inf	Not Available	
DISPLAY\DEFAULT_MONITOR\4&14985FB8&0&11223344&00&01			
IBM eServer xSeries 360 PCI-X Hotplug Controller	No	SYSTEM	5.0.4.1
7/26/2002	IBM Corporation	oem3.inf	Not Available
PCI\VEN_1014&DEV_010F&SUBSYS_01131014&REV_00\3&267A616A&0&10			
IBM Netfinity 10/100 Ethernet Adapter	No	NET	6.4.14.0
9/24/2002	Intel	oem4.inf	Not Available
PCI\VEN_8086&DEV_1229&SUBSYS_024D1014&REV_08\3&267A616A&0&18			
Adaptec AIC-7892 Ultra160 PCI SCSI Card	No	SCSIADAPTER	5.2.3718.0 10/1/2002
	Adaptec	pnpscsi.inf	Not Available
PCI\VEN_9005&DEV_008F&SUBSYS_02011014&REV_02\3&267A616A&0&20			
SCSI Processor Device	No	SYSTEM	5.2.3718.0 10/1/2002
IBM	scsudev.inf	Not Available	
SCSI\PROCESSOR&VEN_IBM&PROD_YGHV3_S2&REV_04&B8ED1E8&0&090			

Disk drive No	DISKDRIVE	5.2.3718.0	10/1/2002 (Standard disk drives)
	disk.inf	Not Available	
SCSI\DISK&VEN_IBM-ESXS&PROD_ST318305LC_!#&REV_B245\4&B8ED1E8&0&0C0			
IBM eServer xSeries 360 PCI-X Hotplug Controller	No	SYSTEM	5.0.4.1
7/26/2002	IBM Corporation	oem3.inf	Not Available
PCI\VEN_1014&DEV_0246&SUBSYS_02471014&REV_00\3&267A616A&0&30			
ServerWorks Champion OSB4 - SouthBridge 4	No	SYSTEM	5.2.3718.0 10/1/2002
	ServerWorks (RCC)	machine.inf	Not Available
Available			
PCI\VEN_1166&DEV_0200&SUBSYS_00000000&REV_50\3&267A616A&0&78			
ISAPNP Read Data Port	No	SYSTEM	5.2.3718.0 10/1/2002 (Standard system devices)
	machine.inf	Not Available	
ISAPNP\READDATAPORT\0			
Motherboard resources	No	SYSTEM	5.2.3718.0 10/1/2002 (Standard system devices)
	machine.inf	Not Available	
ACPI\PNP0C02\2			
Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	No	KEYBOARD	5.2.3718.0 10/1/2002 (Standard keyboards)
	keyboard.inf	Not Available	
Not Available	ACPI\PNP0303\4&23FD4C84&0		
PS/2 Compatible Mouse	No	MOUSE	5.2.3718.0 10/1/2002
	Microsoft	msmouse.inf	Not Available
ACPI\PNP0F13\4&23FD4C84&0			
Standard floppy disk controller	No	FDC	5.2.3718.0 10/1/2002 (Standard floppy disk controllers)
	fdc.inf	Not Available	
ACPI\PNP0700\4&23FD4C84&0			
Floppy disk drive	No	FLOPPYDISK	5.2.3718.0 10/1/2002 (Standard floppy disk drives)
	fpydisk.inf	Not Available	
FDC\GENERIC_FLOPPY_DRIVE\5&6B4DF42&0&0			
Advanced programmable interrupt controller	No	SYSTEM	5.2.3718.0 10/1/2002 (Standard system devices)
	machine.inf	Not Available	
Available	ACPI\PNP0003\4&23FD4C84&0		
Direct memory access controller	No	SYSTEM	5.2.3718.0 10/1/2002 (Standard system devices)
	machine.inf	Not Available	
ACPI\PNP0200\4&23FD4C84&0			
System timer	No	SYSTEM	5.2.3718.0 10/1/2002 (Standard system devices)
	machine.inf	Not Available	
ACPI\PNP0100\4&23FD4C84&0			
System CMOS/real time clock	No	SYSTEM	5.2.3718.0 10/1/2002 (Standard system devices)
	machine.inf	Not Available	
ACPI\PNP0B00\4&23FD4C84&0			
System speaker	No	SYSTEM	5.2.3718.0 10/1/2002 (Standard system devices)
	machine.inf	Not Available	
ACPI\PNP0800\4&23FD4C84&0			
Motherboard resources	No	SYSTEM	5.2.3718.0 10/1/2002 (Standard system devices)
	machine.inf	Not Available	
ACPI\PNP0C02\3			
OSB4 IDE Controller	No	HDC	5.2.3718.0 10/1/2002
	ServerWorks	mshdc.inf	Not Available
PCI\VEN_1166&DEV_0211&SUBSYS_00000000&REV_00\3&267A616A&0&79			
Primary IDE Channel	No	HDC	5.2.3718.0 10/1/2002 (Standard IDE ATA/ATAPI controllers)
	mshdc.inf	Not Available	
PCI\IDE\IDECHANNEL\4&23727F60&0&0			
CD-ROM Drive	No	CDROM	5.2.3718.0 10/1/2002 (Standard CD-ROM drives)
	cdrom.inf	Not Available	
IDE\CDROMLG_CD-ROM_CRN-8245B_____1.13____\5&326853DD&0&0.0.0			
Secondary IDE Channel	No	HDC	5.2.3718.0 10/1/2002 (Standard IDE ATA/ATAPI controllers)
	mshdc.inf	Not Available	
PCI\IDE\IDECHANNEL\4&23727F60&0&1			
ServerWorks (RCC) PCI to USB Open Host Controller	No	USB	5.2.3718.0 10/1/2002
	ServerWorks (RCC)	usbport.inf	Not Available
PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_04\3&267A616A&0&7A			

USB Root Hub	No	USB	5.2.3718.0	10/1/2002	(Standard USB Host Controller) usbport.inf Not Available
USB\ROOT_HUB\4&372644EA&0					
PCI bus	No	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) machine.inf Not Available ACPI\PNP0A03\1
PCI standard host CPU bridge	No	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) machine.inf Not Available
PCI\VEN_1014&DEV_0302&SUBSYS_00000000&REV_02\3&13C0B0C5&0&00					
DEC 21154 PCI to PCI bridge	No	SYSTEM	5.2.3718.0	10/1/2002	DEC machine.inf Not Available
PCI\VEN_1011&DEV_0026&SUBSYS_00000000&REV_05\3&13C0B0C5&0&08					
Mylex eXtremeRAID 2000 Disk Array Controller	No				
SCSIADAPTER	9.0.4.0	9/8/2000	Mylex	oem0.inf	Not Available
PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&1138865F&0&4008					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	IBM scsidev.inf Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D014\5&2A085BFF&0&0F0					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	IBM scsidev.inf Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D014\5&2A085BFF&0&1F0					
Mylex Accelerated Driver	No	DISKDRIVE			Not Available
Available	9/8/2000	Mylex	oem1.inf		Not Available
SCSI\DISK&VEN_MYLEX&PROD_EXTREMER RAID_2000&REV_0700\5&2A085BFF&0&420					
Mylex GAM Device	No	SYSTEM	5.2.3718.0	10/1/2002	Mylex scsidev.inf Not Available
SCSI\PROCESSOR&VEN_MYLEX&PROD_GAM_DEVICE&REV_5&2A085BFF&0&660					
DEC 21154 PCI to PCI bridge	No	SYSTEM	5.2.3718.0	10/1/2002	DEC machine.inf Not Available
PCI\VEN_1011&DEV_0026&SUBSYS_00000000&REV_05\3&13C0B0C5&0&10					
Mylex eXtremeRAID 2000 Controller	No	SCSIADAPTER			
5.2.3718.0 10/1/2002	Mylex	pnpscsi.inf			Not Available
PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&30418910&0&4010					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	IBM scsidev.inf Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D014\5&10BA78D&0&0F0					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	IBM scsidev.inf Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D014\5&10BA78D&0&1F0					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	IBM scsidev.inf Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D014\5&10BA78D&0&2F0					
Mylex Accelerated Driver	No	DISKDRIVE			Not Available
Available	9/8/2000	Mylex	oem1.inf		Not Available
SCSI\DISK&VEN_MYLEX&PROD_EXTREMER RAID_2000&REV_0700\5&10BA78D&0&400					
Mylex GAM Device	No	SYSTEM	5.2.3718.0	10/1/2002	Mylex scsidev.inf Not Available
SCSI\PROCESSOR&VEN_MYLEX&PROD_GAM_DEVICE&REV_5&10BA78D&0&660					
DEC 21154 PCI to PCI bridge	No	SYSTEM	5.2.3718.0	10/1/2002	DEC machine.inf Not Available
PCI\VEN_1011&DEV_0026&SUBSYS_00000000&REV_05\3&13C0B0C5&0&18					
Mylex eXtremeRAID 2000 Controller	No	SCSIADAPTER			
5.2.3718.0 10/1/2002	Mylex	pnpscsi.inf			Not Available
PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&1A9D83F&0&4018					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	IBM scsidev.inf Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D014\5&180DBE2F&0&0F0					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	IBM scsidev.inf Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D014\5&180DBE2F&0&1F0					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	IBM scsidev.inf Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D014\5&180DBE2F&0&2F0					
Mylex Accelerated Driver	No	DISKDRIVE			Not Available
Available	9/8/2000	Mylex	oem1.inf		Not Available
SCSI\DISK&VEN_MYLEX&PROD_EXTREMER RAID_2000&REV_0700\5&180DBE2F&0&400					
Mylex GAM Device	No	SYSTEM	5.2.3718.0	10/1/2002	Mylex scsidev.inf Not Available
SCSI\PROCESSOR&VEN_MYLEX&PROD_GAM_DEVICE&REV_5&180DBE2F&0&660					
PCI bus	No	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) machine.inf Not Available ACPI\PNP0A03\2
PCI standard host CPU bridge	No	SYSTEM	5.2.3718.0	10/1/2002	(Standard system devices) machine.inf Not Available
PCI\VEN_1014&DEV_0302&SUBSYS_00000000&REV_02\3&1070020&0&00					
DEC 21154 PCI to PCI bridge	No	SYSTEM	5.2.3718.0	10/1/2002	DEC machine.inf Not Available
PCI\VEN_1011&DEV_0026&SUBSYS_00000000&REV_05\3&1070020&0&08					
Mylex eXtremeRAID 2000 Controller	No	SCSIADAPTER			
5.2.3718.0 10/1/2002	Mylex	pnpscsi.inf			Not Available
PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_00\4&235BDD1F&0&4008					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	IBM scsidev.inf Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D014\5&2275B46&0&0F0					

SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
IBM	scsidev.inf	Not Available			volume.inf	Not Available				
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D0145&22275B46&0&1F0					STORAGE\VOLUME\1&30A96598&0&SIGNATURED15733E9OFFSET7E000LENGTH1D4F809400					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
IBM	scsidev.inf	Not Available			volume.inf	Not Available				
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D0145&22275B46&0&2F0					STORAGE\VOLUME\1&30A96598&0&SIGNATUREC89584AEOFFSET7E0000LENGTH70AD5600					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
IBM	scsidev.inf	Not Available			volume.inf	Not Available				
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D0145&22275B46&0&3F0					STORAGE\VOLUME\1&30A96598&0&SIGNATUREC89584AEOFFSETD712BD400LENGTH30D4483400					
Mylex Accelerated Driver	No	DISKDRIVE		Not	Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
Available 9/8/2000	Mylex	oem1.inf	Not Available		volume.inf	Not Available				
SCSI\DISK&VEN_MYLEX&PROD_EXTREMER RAID_2000&REV_07005&22275B46&0&400					STORAGE\VOLUME\1&30A96598&0&SIGNATURE909C55D1OFFSET7E0000LENGTHD70AD5600					
Mylex GAM Device	No	SYSTEM	5.2.3718.0	10/1/2002	Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
scsidev.inf	Not Available				volume.inf	Not Available				
SCSI\PROCESSOR&VEN_MYLEX&PROD_GAM_DEVICE&REV_5&22275B46&0&660					STORAGE\VOLUME\1&30A96598&0&SIGNATURE909C55D1OFFSETD712BD400LENGTH30D4483400					
DEC 21154 PCI to PCI bridge	No	SYSTEM	5.2.3718.0	10/1/2002	Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
DEC	machine.inf	Not Available			volume.inf	Not Available				
PCI\VEN_1011&DEV_0026&SUBSYS_00000000&REV_05\3&1070020&0&10					STORAGE\VOLUME\1&30A96598&0&SIGNATURED2EC92AF0FFSET7E0000LENGTH1FC0970A00					
Mylex eXtremeRAID 2000 Controller	No	SCSIADAPTER			Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
5.2.3718.0 10/1/2002	Mylex	pnpscsi.inf	Not Available		volume.inf	Not Available				
PCI\VEN_1069&DEV_BA56&SUBSYS_00401069&REV_004&6CA15C9&0&4010					STORAGE\VOLUME\1&30A96598&0&SIGNATURE4130AFABOFFSET7E0000LENGTH1252DA4200					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
IBM	scsidev.inf	Not Available			volume.inf	Not Available				
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D0145&38B2B567&0&0F0					STORAGE\VOLUME\1&30A96598&0&SIGNATURE4130AFABOFFSET125358C000LENGTH30D4483400					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
IBM	scsidev.inf	Not Available			volume.inf	Not Available				
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D0145&38B2B567&0&1F0					STORAGE\VOLUME\1&30A96598&0&SIGNATUREB1D6A863OFFSET7E0000LENGTH1252DA4200					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Microsoft
IBM	scsidev.inf	Not Available			volume.inf	Not Available				
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D0145&38B2B567&0&2F0					STORAGE\VOLUME\1&30A96598&0&SIGNATUREB1D6A863OFFSET125358C000LENGTH30D4483400					
SCSI Processor Device	No	SYSTEM	5.2.3718.0	10/1/2002	AFD Networking Support Environment	Not Available				
IBM	scsidev.inf	Not Available			LEGACYDRIVER	Not Available	Not Available	Not Available	Not Available	Not Available
SCSI\PROCESSOR&VEN_IBM&PROD_EXP300__S160&REV_D0145&38B2B567&0&3F0					Available	Not Available	Not Available	Not Available	Not Available	Not Available
Mylex Accelerated Driver	No	DISKDRIVE		Not	ROOT\LEGACY_AFD\0000					
Available 9/8/2000	Mylex	oem1.inf	Not Available		Beep	Not Available	LEGACYDRIVER	Not Available		
SCSI\DISK&VEN_MYLEX&PROD_EXTREMER RAID_2000&REV_07005&38B2B567&0&400					Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
Mylex GAM Device	No	SYSTEM	5.2.3718.0	10/1/2002	Available	ROOT\LEGACY_BEEP\0000				
scsidev.inf	Not Available				CRC Disk Filter Driver	Not Available	LEGACYDRIVER			
SCSI\PROCESSOR&VEN_MYLEX&PROD_GAM_DEVICE&REV_5&38B2B567&0&660					Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
Not Available	Not Available	Not Available	Not Available	Not	Available	Not Available	Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available	Not Available	dmboot	Not Available	LEGACYDRIVER	Not Available		
Not Available	ACPI\IBM37D42&DABA3FF&0				Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
ACPI Fixed Feature Button	No	SYSTEM	5.2.3718.0	10/1/2002	Available	ROOT\LEGACY_DMLOAD\0000				
(Standard system devices)	machine.inf	Not Available			Fips	Not Available	LEGACYDRIVER	Not Available		
ACPI\FIXEDBUTTON\2&DABA3FF&0					Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
Logical Disk Manager	No	SYSTEM	5.2.3718.0	10/1/2002	Available	ROOT\LEGACY_FIPS\0000				
(Standard system devices)	machine.inf	Not Available			Generic Packet Classifier	Not Available	LEGACYDRIVER			
ROOT\DMIO\0000					Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
Volume Manager	No	SYSTEM	5.2.3718.0	10/1/2002	Available	Not Available	ROOT\LEGACY_GPC\0000			
(Standard system devices)	machine.inf	Not Available			IPSEC driver	Not Available	LEGACYDRIVER	Not Available		
ROOT\FTDISK\0000					Available	Not Available	Not Available	Not Available	Not Available	Not Available
Generic volume	No	VOLUME	5.2.3718.0	10/1/2002	Not Available	ROOT\LEGACY_IPSEC\0000				
volume.inf	Not Available				ksecdd	Not Available	LEGACYDRIVER	Not Available		
STORAGE\VOLUME\1&30A96598&0&SIGNATUREF76AC3DFOFFSET7E000LENGTH43BF94800					Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
					Available	ROOT\LEGACY_KSECDD\0000				

```

macdisk Not Available LEGACYDRIVER Not Available
Not Available Not Available Not Available Not
Available ROOT\LEGACY_MACDISK\0000
mmdd Not Available LEGACYDRIVER Not Available
Not Available Not Available Not Available Not
Available ROOT\LEGACY_MMDD\0000
mountmgr Not Available LEGACYDRIVER Not Available
Not Available Not Available Not Available Not
Available ROOT\LEGACY_MOUNTMGR\0000
NDIS System Driver Not Available LEGACYDRIVER Not
Available Not Available Not Available Not Available
Not Available ROOT\LEGACY_NDIS\0000
Remote Access NDIS TAPI Driver Not Available
LEGACYDRIVER Not Available Not Available Not
Available Not Available Not Available
ROOT\LEGACY_NDIS\0000
NDIS Usermode I/O Protocol Not Available LEGACYDRIVER
Not Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_NDISUIO\0000
NDProxy Not Available LEGACYDRIVER Not Available
Not Available Not Available Not Available Not
Available ROOT\LEGACY_NDPROXY\0000
NetBios over Tcpip Not Available LEGACYDRIVER Not
Available Not Available Not Available Not Available
Not Available ROOT\LEGACY_NETBT\0000
Null Not Available LEGACYDRIVER Not Available
Not Available Not Available Not Available Not
Available ROOT\LEGACY_NULL\0000
Partition Manager Not Available LEGACYDRIVER Not
Available Not Available Not Available Not Available
Not Available ROOT\LEGACY_PARTMGR\0000
Remote Access Auto Connection Driver Not Available
LEGACYDRIVER Not Available Not Available Not
Available Not Available Not Available
ROOT\LEGACY_RASACD\0000
RDPcdd Not Available LEGACYDRIVER Not Available
Not Available Not Available Not Available Not
Available ROOT\LEGACY_RDPcdd\0000
TCP/IP Protocol Driver Not Available LEGACYDRIVER
Not Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_TCPIP\0000
VGA Display Controller. Not Available LEGACYDRIVER
Not Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_VGASAVE\0000
volsnap Not Available LEGACYDRIVER Not Available
Not Available Not Available Not Available Not
Available ROOT\LEGACY_VOLSNAP\0000
Remote Access IP ARP Driver Not Available LEGACYDRIVER
Not Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_WANARP\0000
Audio Codecs No MEDIA 5.2.3718.0 10/1/2002 (Standard
system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMCM
Legacy Audio DriversNo MEDIA 5.2.3718.0 10/1/2002 (Standard
system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMDRV
Media Control Devices No MEDIA 5.2.3718.0 10/1/2002
(Standard system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMMC1
Legacy Video Capture Devices No MEDIA 5.2.3718.0 10/1/2002
(Standard system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMVCD
Video Codecs No MEDIA 5.2.3718.0 10/1/2002 (Standard
system devices) wave.inf Not Available
ROOT\MEDIA\MS_MMVID
WAN Miniport (L2TP) No NET 5.2.3718.0 10/1/2002
Microsoft netrasa.inf Not Available
ROOT\MS_L2TPMINIPORT\0000

```

```

WAN Miniport (IP) No NET 5.2.3718.0 10/1/2002 Microsoft
netrasa.inf Not Available ROOT\MS_NDISWANIP\0000
WAN Miniport (PPPOE) No NET 5.2.3718.0 10/1/2002
Microsoft netrasa.inf Not Available
ROOT\MS_PPPOEMINIPORT\0000
WAN Miniport (PPTP) No NET 5.2.3718.0 10/1/2002
Microsoft netrasa.inf Not Available
ROOT\MS_PPTPMINIPORT\0000
Direct Parallel No NET 5.2.3718.0 10/1/2002 Microsoft
netrasa.inf Not Available ROOT\MS_PTMINIPORT\0000
Terminal Server Device Redirector No SYSTEM 5.2.3718.0
10/1/2002 (Standard system devices) machine.inf Not
Available ROOT\RDPDR\0000
Terminal Server Keyboard Driver No SYSTEM 5.2.3718.0
10/1/2002 (Standard system devices) machine.inf Not
Available ROOT\RDP_KBD\0000
Terminal Server Mouse Driver No SYSTEM 5.2.3718.0 10/1/2002
(Standard system devices) machine.inf Not Available
ROOT\RDP_MOU\0000
Plug and Play Software Device Enumerator No SYSTEM 5.2.3718.0
10/1/2002 (Standard system devices) machine.inf Not
Available ROOT\SYSTEM\0000
Microcode Update Device No SYSTEM 5.2.3718.0 10/1/2002
(Standard system devices) machine.inf Not Available
ROOT\SYSTEM\0001

```

[Environment Variables]

```

Variable Value User Name
ClusterLog C:\WINDOWS\Cluster\cluster.log <SYSTEM>
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
NUMBER_OF_PROCESSORS 8 <SYSTEM>
OS Windows_NT <SYSTEM>
Path
%SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;
C:\Program Files\Microsoft SQL Server\MSSQL\BINN;C:\Program
Files\Microsoft SQL Server\80\Tools\BINN <SYSTEM>
PATHEXT
.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH <SYSTEM>
PROCESSOR_ARCHITECTURE x86 <SYSTEM>
PROCESSOR_IDENTIFIER x86 Family 15 Model 2 Stepping 2,
GenuineIntel <SYSTEM>
PROCESSOR_LEVEL 15 <SYSTEM>
PROCESSOR_REVISION 0202 <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
windir %SystemRoot% <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
IBMSERVER3\Administrator
TMP %USERPROFILE%\Local Settings\Temp
IBMSERVER3\Administrator

```

[Print Jobs]

```

Document Size Owner Notify Status Time Submitted
Start Time Until TimeElapsed Time Pages Printed Job ID

```

Priority Parameters Driver Print Processor Host Print Queue
Data Type Name

[Network Connections]

Local Name	Remote Name	Type	Status	User Name
X:	\\192.168.132.253\e\$	Disk	Current Connection	
IBMSERVER3\Administrator				

[Running Tasks]

Name	Path	Process ID	Priority	Min Working Set	Max
Working Set	Start Time	Version	Size	File Date	
system idle process	Not Available	Not Available	0	0	Not Available
system	Not Available	4	8	0	1413120
smss.exe	c:\windows\system32\smss.exe	392	11	204800	
1413120	2/26/2003 8:29 AM	5.2.3718.0	(dnsvr.021114-1947)	46.50 KB (47,616 bytes)	11/15/2002 7:00 AM
csrss.exe	Not Available	440	13	Not Available	
2/26/2003 8:29 AM	Not Available	Not Available	Not Available		
winlogon.exe	c:\windows\system32\winlogon.exe	464			
13	204800	1413120	2/26/2003 8:29 AM	5.2.3718.0	11/15/2002 7:00 AM
(dnsvr.021114-1947)	524.00 KB (536,576 bytes)				
services.exe	c:\windows\system32\services.exe	508	9		
204800	1413120	2/26/2003 8:29 AM	5.2.3718.0	(dnsvr.021114-1947)	99.50 KB (101,888 bytes)
11/15/2002 7:00 AM					
lsass.exe	c:\windows\system32\lsass.exe	520	9	204800	
1413120	2/26/2003 8:29 AM	5.2.3718.0	(dnsvr.021114-1947)	13.00 KB (13,312 bytes)	11/15/2002 7:00 AM
svchost.exe	c:\windows\system32\svchost.exe	728	8		
204800	1413120	2/26/2003 8:29 AM	5.2.3718.0	(dnsvr.021114-1947)	12.00 KB (12,288 bytes)
11/15/2002 7:00 AM					
svchost.exe	Not Available	784	8	Not Available	
2/26/2003 8:29 AM	Not Available	Not Available	Not Available		
svchost.exe	c:\windows\system32\svchost.exe	820	8		
204800	1413120	2/26/2003 8:29 AM	5.2.3718.0	(dnsvr.021114-1947)	12.00 KB (12,288 bytes)
11/15/2002 7:00 AM					
msdtc.exe	Not Available	884	8	Not Available	
2/26/2003 8:29 AM	Not Available	Not Available	Not Available		
svchost.exe	c:\windows\system32\svchost.exe	1080	8		
204800	1413120	2/26/2003 8:29 AM	5.2.3718.0	(dnsvr.021114-1947)	12.00 KB (12,288 bytes)
11/15/2002 7:00 AM					
svchost.exe	c:\windows\system32\svchost.exe	1120	8		
204800	1413120	2/26/2003 8:29 AM	5.2.3718.0	(dnsvr.021114-1947)	12.00 KB (12,288 bytes)
11/15/2002 7:00 AM					
wmiprvse.exe	Not Available	1296	8	Not Available	
2/26/2003 8:30 AM	Not Available	Not Available	Not Available		
explorer.exe	c:\windows\explorer.exe	1512	8		
204800	1413120	2/26/2003 8:32 AM	6.00.3718.0	(dnsvr.021114-1947)	995.50 KB (1,019,392 bytes)
11/15/2002 7:00 AM					
cmd.exe	c:\windows\system32\cmd.exe	1764	8	204800	
1413120	2/26/2003 8:32 AM	5.2.3718.0	(dnsvr.021114-1947)	370.00 KB (378,880 bytes)	11/15/2002 7:00 AM
wpabaln.exe	c:\windows\system32\wpabaln.exe	2044	8		
204800	1413120	2/26/2003 8:34 AM	5.2.3718.0	(dnsvr.021114-1947)	31.00 KB (31,744 bytes)
11/15/2002 7:00 AM					
cmd.exe	c:\windows\system32\cmd.exe	208	8	204800	
1413120	2/26/2003 8:36 AM	5.2.3718.0	(dnsvr.021114-1947)	370.00 KB (378,880 bytes)	11/15/2002 7:00 AM

helpctr.exe	c:\windows\pchealth\helpctr\binaries\helpctr.exe	1756	8		
204800	1413120	2/26/2003 12:39 PM	5.2.3718.0	(dnsvr.021114-1947)	734.50 KB (752,128 bytes)
1/27/2003 5:31 PM					
wmiprvse.exe	Not Available	1808	8	Not Available	
2/26/2003 12:39 PM	Not Available	Not Available	Not Available		
helpsvc.exe	c:\windows\pchealth\helpctr\binaries\helpsvc.exe	1872	8	204800	
1413120	2/26/2003 12:39 PM	5.2.3718.0	(dnsvr.021114-1947)	686.50 KB (702,976 bytes)	1/27/2003 5:31 PM

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer	Path
smss	5.2.3718.0	(dnsvr.021114-1947)	46.50 KB (47,616 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\smss.exe					
ntdll	5.2.3718.0	(dnsvr.021114-1947)	708.00 KB (724,992 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\ntdll.dll					
winlogon	5.2.3718.0	(dnsvr.021114-1947)	524.00 KB (536,576 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\winlogon.exe					
kernel32	5.2.3718.0	(dnsvr.021114-1947)	949.00 KB (971,776 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\kernel32.dll					
msvcrt	7.0.3718.0	(dnsvr.021114-1947)	319.50 KB (327,168 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\msvcrt.dll					
advapi32	5.2.3718.0	(dnsvr.021114-1947)	534.00 KB (546,816 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\advapi32.dll					
rpert4	5.2.3718.0	(dnsvr.021114-1947)	540.00 KB (552,960 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\rpert4.dll					
user32	5.2.3718.0	(dnsvr.021114-1947)	552.50 KB (565,760 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\user32.dll					
gdi32	5.2.3718.0	(dnsvr.021114-1947)	255.00 KB (261,120 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\gdi32.dll					
userenv	5.2.3718.0	(dnsvr.021114-1947)	726.50 KB (743,936 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\userenv.dll					
nddeapi	5.2.3718.0	(dnsvr.021114-1947)	15.50 KB (15,872 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\nddeapi.dll					
crypt32	5.131.3718.0	(dnsvr.021114-1947)	534.50 KB (547,328 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\crypt32.dll					
msasn1	5.2.3718.0	(dnsvr.021114-1947)	50.50 KB (51,712 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\msasn1.dll					
secur32	5.2.3718.0	(dnsvr.021114-1947)	56.00 KB (57,344 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\secur32.dll					
winsta	5.2.3718.0	(dnsvr.021114-1947)	48.50 KB (49,664 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\winsta.dll					
netapi32	5.2.3718.0	(dnsvr.021114-1947)	311.50 KB (318,976 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\netapi32.dll					
profmap	5.2.3718.0	(dnsvr.021114-1947)	21.50 KB (22,016 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\profmap.dll					
regapi	5.2.3718.0	(dnsvr.021114-1947)	47.50 KB (48,640 bytes)		
11/15/2002 7:00 AM	Microsoft Corporation				
c:\windows\system32\regapi.dll					

ws2_32	5.2.3718.0 (dnsvr.021114-1947)	75.00 KB (76,800 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ws2_32.dll
ws2help	5.2.3718.0 (dnsvr.021114-1947)	19.00 KB (19,456 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ws2help.dll
psapi	5.2.3718.0 (dnsvr.021114-1947)	21.00 KB (21,504 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\psapi.dll
version	5.2.3718.0 (dnsvr.021114-1947)	16.50 KB (16,896 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\version.dll
setupapi	5.2.3718.0 (dnsvr.021114-1947)	999.00 KB (1,022,976 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\setupapi.dll
msgina	5.2.3718.0 (dnsvr.021114-1947)	1.13 MB (1,186,304 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\msgina.dll
shsvcs	6.00.3718.0 (dnsvr.021114-1947)	121.50 KB (124,416 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\shsvcs.dll
shlwapi	6.00.3718.0 (dnsvr.021114-1947)	272.00 KB (278,528 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\shlwapi.dll
sfc	5.2.3718.0 (dnsvr.021114-1947)	4.50 KB (4,608 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\sfc.dll
sfc_os	5.2.3718.0 (dnsvr.021114-1947)	133.00 KB (136,192 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\sfc_os.dll
wintrust	5.131.3718.0 (dnsvr.021114-1947)	159.50 KB (163,328 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wintrust.dll
ole32	5.2.3718.0 (dnsvr.021114-1947)	1.09 MB (1,139,200 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ole32.dll
imagehlp	5.2.3718.0 (dnsvr.021114-1947)	136.50 KB (139,776 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\imagehlp.dll
comctl32	6.0 (dnsvr.021114-1947)	907.00 KB (928,768 bytes)	1/27/2003 12:00 PM	Microsoft Corporation	c:\windows\winsxs\x86_microsoft.windows.common-controls_6595b64144ccf1df_6.0.100.0_x-ww_8417450b\comctl32.dll
winscard	5.2.3718.0 (dnsvr.021114-1947)	94.00 KB (96,256 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wincard.dll
wtsapi32	5.2.3718.0 (dnsvr.021114-1947)	17.00 KB (17,408 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wtsapi32.dll
sxs	5.2.3718.0 (dnsvr.021114-1947)	714.00 KB (731,136 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\sxs.dll
shell32	6.00.3718.0 (dnsvr.021114-1947)	7.77 MB (8,152,064 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\shell32.dll
rsaenh	5.2.3718.0 (dnsvr.021114-1947)	177.07 KB (181,320 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\rsaenh.dll
wldap32	5.2.3718.0 (dnsvr.021114-1947)	137.00 KB (140,288 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wldap32.dll
csdll	5.2.3718.0 (dnsvr.021114-1947)	93.50 KB (95,744 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\csd.dll
wlnotify	5.2.3718.0 (dnsvr.021114-1947)	86.00 KB (88,064 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wlnotify.dll
winmm	5.2.3718.0 (dnsvr.021114-1947)	162.50 KB (166,400 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\winmm.dll
winspool	5.2.3718.0 (dnsvr.021114-1947)	135.00 KB (138,240 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\winspool.drv
mpr	5.2.3718.0 (dnsvr.021114-1947)	55.00 KB (56,320 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\mpr.dll
comctl32	5.82 (dnsvr.021114-1947)	561.00 KB (574,464 bytes)	1/27/2003 12:00 PM	Microsoft Corporation	c:\windows\winsxs\x86_microsoft.windows.common-controls_6595b64144ccf1df_5.82.0.0_x-ww_8a69ba05\comctl32.dll
uxtheme	6.00.3718.0 (dnsvr.021114-1947)	191.50 KB (196,096 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\uxtheme.dll
mprapi	5.2.3718.0 (dnsvr.021114-1947)	77.50 KB (79,360 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\mprapi.dll
activeds	5.2.3718.0 (dnsvr.021114-1947)	182.50 KB (186,880 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\activeds.dll
adslrpc	5.2.3718.0 (dnsvr.021114-1947)	138.50 KB (141,824 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\adslrpc.dll
credui	5.2.3718.0 (dnsvr.021114-1947)	158.50 KB (162,304 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\credui.dll
atl	3.05.2283	83.00 KB (84,992 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\atl.dll
oleaut32	5.2.3718.0	485.00 KB (496,640 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\oleaut32.dll
rtutils	5.2.3718.0 (dnsvr.021114-1947)	31.50 KB (32,256 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\rtutils.dll
samlib	5.2.3718.0 (dnsvr.021114-1947)	41.00 KB (41,984 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\samlib.dll
csoui	5.2.3718.0 (dnsvr.021114-1947)	300.00 KB (307,200 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\csoui.dll
clbcatq	2001.12.4648.0 (dnsvr.021114-1947)	469.00 KB (480,256 bytes)	1/27/2003 5:26 PM	Microsoft Corporation	c:\windows\system32\clbcatq.dll
comres	2001.12.4648.0 (dnsvr.021114-1947)	778.00 KB (796,672 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\comres.dll
ntmarta	5.2.3718.0 (dnsvr.021114-1947)	111.50 KB (114,176 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ntmarta.dll
wbemprox	5.2.3718.0 (dnsvr.021114-1947)	16.50 KB (16,896 bytes)	1/27/2003 5:26 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemprox.dll
wbemcomn	5.2.3718.0 (dnsvr.021114-1947)	202.50 KB (207,360 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\wbem\wbemcomn.dll
wbemsvc	5.2.3718.0 (dnsvr.021114-1947)	42.00 KB (43,008 bytes)	1/27/2003 5:26 PM	Microsoft Corporation	c:\windows\system32\wbem\wbemsvc.dll
fastprox	5.2.3718.0 (dnsvr.021114-1947)	442.00 KB (452,608 bytes)	1/27/2003 5:26 PM	Microsoft Corporation	c:\windows\system32\wbem\fastprox.dll
msvcpx60	6.05.2144.0	388.00 KB (397,312 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\msvcpx60.dll
ntdsapi	5.2.3718.0 (dnsvr.021114-1947)	67.00 KB (68,608 bytes)	11/15/2002 7:00 AM	Microsoft Corporation	c:\windows\system32\ntdsapi.dll

dnsapi 5.2.3718.0 (dnsvr.021114-1947) 146.00 KB (149,504 bytes)	ntdsatq 5.2.3718.0 (dnsvr.021114-1947) 27.50 KB (28,160 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\dnsapi.dll	c:\windows\system32\ntdsatq.dll
services 5.2.3718.0 (dnsvr.021114-1947) 99.50 KB (101,888 bytes)	mswsock 5.2.3718.0 (dnsvr.021114-1947) 226.00 KB (231,424 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\services.exe	c:\windows\system32\mswsock.dll
scesrv 5.2.3718.0 (dnsvr.021114-1947) 311.50 KB (318,976 bytes)	esent 5.2.3718.0 (dnsvr.021114-1947) 920.50 KB (942,592 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\scesrv.dll	c:\windows\system32\esent.dll
authz 5.2.3718.0 (dnsvr.021114-1947) 61.00 KB (62,464 bytes)	scecli 5.2.3718.0 (dnsvr.021114-1947) 176.00 KB (180,224 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\authz.dll	c:\windows\system32\scecli.dll
umpnpgmr 5.2.3718.0 (dnsvr.021114-1947) 119.50 KB (122,368 bytes)	pstorsvc 5.2.3718.0 (dnsvr.021114-1947) 24.00 KB (24,576 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\umpnpgmr.dll	c:\windows\system32\pstorsvc.dll
ncobjapi 5.2.3718.0 (dnsvr.021114-1947) 32.50 KB (33,280 bytes)	psbase 5.2.3718.0 (dnsvr.021114-1947) 83.00 KB (84,992 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\ncobjapi.dll	c:\windows\system32\psbase.dll
eventlog 5.2.3718.0 (dnsvr.021114-1947) 58.50 KB (59,904 bytes)	wshtcpip 5.2.3718.0 (dnsvr.021114-1947) 17.50 KB (17,920 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\eventlog.dll	c:\windows\system32\wshtcpip.dll
lsass 5.2.3718.0 (dnsvr.021114-1947) 13.00 KB (13,312 bytes)	dssenh 5.2.3718.0 (dnsvr.021114-1947) 131.07 KB (134,216 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\lsass.exe	c:\windows\system32\dssenh.dll
lsasrv 5.2.3718.0 (dnsvr.021114-1947) 715.50 KB (732,672 bytes)	svchost 5.2.3718.0 (dnsvr.021114-1947) 12.00 KB (12,288 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\lsasrv.dll	c:\windows\system32\svchost.exe
samsrv 5.2.3718.0 (dnsvr.021114-1947) 412.50 KB (422,400 bytes)	rpsvc 5.2.3718.0 (dnsvr.021114-1947) 268.50 KB (274,944 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\samsrv.dll	c:\windows\system32\rpsvc.dll
cryptdll 5.2.3718.0 (dnsvr.021114-1947) 29.00 KB (29,696 bytes)	wkssvc 5.2.3718.0 (dnsvr.021114-1947) 123.00 KB (125,952 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\cryptdll.dll	c:\windows\system32\wkssvc.dll
msprivs 5.2.3718.0 (dnsvr.021114-1947) 45.50 KB (46,592 bytes)	wiarpc 5.2.3718.0 (dnsvr.021114-1947) 30.00 KB (30,720 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\msprivs.dll	c:\windows\system32\wiarpc.dll
kerberos 5.2.3718.0 (dnsvr.021114-1947) 305.50 KB (312,832 bytes)	dnsrserver 5.2.3718.0 (dnsvr.021114-1947) 23.50 KB (24,064 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\kerberos.dll	c:\windows\system32\dnsrserver.dll
msv1_0 5.2.3718.0 (dnsvr.021114-1947) 114.00 KB (116,736 bytes)	wmisvc 5.2.3718.0 (dnsvr.021114-1947) 131.50 KB (134,656 bytes)
11/15/2002 7:00 AM Microsoft Corporation	1/27/2003 5:26 PM Microsoft Corporation
c:\windows\system32\msv1_0.dll	c:\windows\system32\wbem\wmisvc.dll
netlogon 5.2.3718.0 (dnsvr.021114-1947) 404.00 KB (413,696 bytes)	vssapi 5.2.3718.0 (dnsvr.021114-1947) 526.00 KB (538,624 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\netlogon.dll	c:\windows\system32\vssapi.dll
w32time 5.2.3718.0 (dnsvr.021114-1947) 210.50 KB (215,552 bytes)	es 2001.12.4648.0 (dnsvr.021114-1947) 221.00 KB (226,304 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\w32time.dll	c:\windows\system32\es.dll
iphlpapi 5.2.3718.0 (dnsvr.021114-1947) 81.00 KB (82,944 bytes)	comsvcs 2001.12.4648.0 (dnsvr.021114-1947) 1.11 MB (1,160,704 bytes)
11/15/2002 7:00 AM Microsoft Corporation	1/27/2003 5:26 PM Microsoft Corporation
c:\windows\system32\iphlpapi.dll	c:\windows\system32\comsvcs.dll
schannel 5.2.3718.0 (dnsvr.021114-1947) 145.00 KB (148,480 bytes)	sens 5.2.3718.0 (dnsvr.021114-1947) 35.00 KB (35,840 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\schannel.dll	c:\windows\system32\sens.dll
wdigest 5.2.3718.0 (dnsvr.021114-1947) 61.00 KB (62,464 bytes)	wbemcore 5.2.3718.0 (dnsvr.021114-1947) 453.50 KB (464,384 bytes)
11/15/2002 7:00 AM Microsoft Corporation	1/27/2003 5:26 PM Microsoft Corporation
c:\windows\system32\wdigest.dll	c:\windows\system32\wbem\wbemcore.dll
rassfm 5.2.3718.0 (dnsvr.021114-1947) 20.50 KB (20,992 bytes)	esscli 5.2.3718.0 (dnsvr.021114-1947) 232.50 KB (238,080 bytes)
11/15/2002 7:00 AM Microsoft Corporation	1/27/2003 5:26 PM Microsoft Corporation
c:\windows\system32\rassfm.dll	c:\windows\system32\wbem\esscli.dll
kdesvc 5.2.3718.0 (dnsvr.021114-1947) 203.00 KB (207,872 bytes)	wmiutils 5.2.3718.0 (dnsvr.021114-1947) 90.00 KB (92,160 bytes)
11/15/2002 7:00 AM Microsoft Corporation	1/27/2003 5:26 PM Microsoft Corporation
c:\windows\system32\kdesvc.dll	c:\windows\system32\wbem\wmiutils.dll
ntdsa 5.2.3718.0 (dnsvr.021114-1947) 1.31 MB (1,376,256 bytes)	repldrvfs 5.2.3718.0 (dnsvr.021114-1947) 165.50 KB (169,472 bytes)
11/15/2002 7:00 AM Microsoft Corporation	1/27/2003 5:26 PM Microsoft Corporation
c:\windows\system32\ntdsa.dll	c:\windows\system32\wbem\repldrvfs.dll

wmiprvsd 5.2.3718.0 (dnsvr.021114-1947) 405.50 KB (415,232 bytes)	icaapi 5.2.3718.0 (dnsvr.021114-1947) 10.00 KB (10,240 bytes)
1/27/2003 5:26 PM Microsoft Corporation	1/27/2003 5:26 PM Microsoft Corporation
c:\windows\system32\wbem\wmiprvsd.dll	c:\windows\system32\icaapi.dll
wbemess 5.2.3718.0 (dnsvr.021114-1947) 255.00 KB (261,120 bytes)	mstlsapi 5.2.3718.0 (dnsvr.021114-1947) 104.00 KB (106,496 bytes)
1/27/2003 5:26 PM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\wbem\wbemess.dll	c:\windows\system32\mstlsapi.dll
ncprov 5.2.3718.0 (dnsvr.021114-1947) 43.00 KB (44,032 bytes)	explorer 6.00.3718.0 (dnsvr.021114-1947) 995.50 KB (1,019,392 bytes)
1/27/2003 5:26 PM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\wbem\ncprov.dll	c:\windows\explorer.exe
netman 5.2.3718.0 (dnsvr.021114-1947) 200.00 KB (204,800 bytes)	browseui 6.00.3718.0 (dnsvr.021114-1947) 1,009.00 KB (1,033,216 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\netman.dll	c:\windows\system32\browseui.dll
rasapi32 5.2.3718.0 (dnsvr.021114-1947) 219.50 KB (224,768 bytes)	shdocvw 6.00.3718.0 (dnsvr.021114-1947) 1.30 MB (1,358,336 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\rasapi32.dll	c:\windows\system32\shdocvw.dll
rasman 5.2.3718.0 (dnsvr.021114-1947) 55.00 KB (56,320 bytes)	apphelp 5.2.3718.0 (dnsvr.021114-1947) 120.00 KB (122,880 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\rasman.dll	c:\windows\system32\apphelp.dll
tapi32 5.2.3718.0 (dnsvr.021114-1947) 170.50 KB (174,592 bytes)	themeui 6.00.3718.0 (dnsvr.021114-1947) 360.50 KB (369,152 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\tapi32.dll	c:\windows\system32\themeui.dll
wzscvc 5.2.3718.0 (dnsvr.021114-1947) 272.50 KB (279,040 bytes)	msimg32 5.2.3718.0 (dnsvr.021114-1947) 4.50 KB (4,608 bytes)
11/15/2002 10:36 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\wzscvc.dll	c:\windows\system32\msimg32.dll
wmi 5.2.3718.0 (dnsvr.021114-1947) 6.50 KB (6,656 bytes)	actxprxy 6.00.3718.0 (dnsvr.021114-1947) 90.50 KB (92,672 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\wmi.dll	c:\windows\system32\actxprxy.dll
dhcpcsvc 5.2.3718.0 (dnsvr.021114-1947) 100.50 KB (102,912 bytes)	linkinfo 5.2.3718.0 (dnsvr.021114-1947) 15.50 KB (15,872 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\dhcpcsvc.dll	c:\windows\system32\linkinfo.dll
wzcsapi 5.2.3718.0 (dnsvr.021114-1947) 24.00 KB (24,576 bytes)	ntshrui 6.00.3718.0 (dnsvr.021114-1947) 134.50 KB (137,728 bytes)
11/15/2002 10:36 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\wzcsapi.dll	c:\windows\system32\ntshrui.dll
netshell 5.2.3718.0 (dnsvr.021114-1947) 1.64 MB (1,721,856 bytes)	webcheck 6.00.3718.0 (dnsvr.021114-1947) 256.00 KB (262,144 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\netshell.dll	c:\windows\system32\webcheck.dll
clusapi 5.2.3718.0 (dnsvr.021114-1947) 54.50 KB (55,808 bytes)	wsock32 5.2.3718.0 (dnsvr.021114-1947) 22.00 KB (22,528 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\clusapi.dll	c:\windows\system32\wsock32.dll
hnetcfg 5.2.3718.0 (dnsvr.021114-1947) 243.50 KB (249,344 bytes)	stobject 5.2.3718.0 (dnsvr.021114-1947) 117.00 KB (119,808 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\hnetcfg.dll	c:\windows\system32\stobject.dll
wininet 6.00.3718.0 (dnsvr.021114-1947) 591.50 KB (605,696 bytes)	batmeter 6.00.3718.0 (dnsvr.021114-1947) 28.00 KB (28,672 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\wininet.dll	c:\windows\system32\batmeter.dll
rasdlg 5.2.3718.0 (dnsvr.021114-1947) 640.50 KB (655,872 bytes)	powrprof 6.00.3718.0 (dnsvr.021114-1947) 14.00 KB (14,336 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\rasdlg.dll	c:\windows\system32\powrprof.dll
rasadhlp 5.2.3718.0 (dnsvr.021114-1947) 6.00 KB (6,144 bytes)	printui 5.2.3718.0 (dnsvr.021114-1947) 527.00 KB (539,648 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\rasadhlp.dll	c:\windows\system32\printui.dll
netcfgx 5.2.3718.0 (dnsvr.021114-1947) 726.00 KB (743,424 bytes)	cfgmgr32 5.2.3718.0 (dnsvr.021114-1947) 17.00 KB (17,408 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\netcfgx.dll	c:\windows\system32\cfgmgr32.dll
winipsec 5.2.3718.0 (dnsvr.021114-1947) 32.50 KB (33,280 bytes)	urlmon 6.00.3718.0 (dnsvr.021114-1947) 457.50 KB (468,480 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\winipsec.dll	c:\windows\system32\urlmon.dll
pchsvc 5.2.3718.0 (dnsvr.021114-1947) 30.00 KB (30,720 bytes)	ntlanman 5.2.3718.0 (dnsvr.021114-1947) 39.50 KB (40,448 bytes)
1/27/2003 5:31 PM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\pchsvc.dll	c:\windows\system32\ntlanman.dll
wbemcons 5.2.3718.0 (dnsvr.021114-1947) 69.00 KB (70,656 bytes)	netui0 5.2.3718.0 (dnsvr.021114-1947) 73.00 KB (74,752 bytes)
1/27/2003 5:26 PM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\wbem\wbemcons.dll	c:\windows\system32\netui0.dll
ersvc 5.2.3718.0 (dnsvr.021114-1947) 22.00 KB (22,528 bytes)	netui1 5.2.3718.0 (dnsvr.021114-1947) 177.00 KB (181,248 bytes)
11/15/2002 7:00 AM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\ersvc.dll	c:\windows\system32\netui1.dll
termsrv 5.2.3718.0 (dnsvr.021114-1947) 215.00 KB (220,160 bytes)	davclnt 5.2.3718.0 (dnsvr.021114-1947) 23.00 KB (23,552 bytes)
1/27/2003 5:26 PM Microsoft Corporation	11/15/2002 7:00 AM Microsoft Corporation
c:\windows\system32\termsrv.dll	c:\windows\system32\davclnt.dll

drprov 5.2.3718.0 (dnsvr.021114-1947) 11.50 KB (11,776 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\drprov.dll
 browselc 6.00.3718.0 (dnsvr.021114-1947) 61.50 KB (62,976 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\browselc.dll
 shdoclc 6.00.3718.0 (dnsvr.021114-1947) 521.00 KB (533,504 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\shdoclc.dll
 mprui 5.2.3718.0 (dnsvr.021114-1947) 47.50 KB (48,640 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\mprui.dll
 netui2 5.2.3718.0 (dnsvr.021114-1947) 300.00 KB (307,200 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\netui2.dll
 comdlg32 6.00.3718.0 (dnsvr.021114-1947) 257.00 KB (263,168 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\comdlg32.dll
 netmsg 5.2.3718.0 (dnsvr.021114-1947) 178.00 KB (182,272 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\netmsg.dll
 netplwiz 5.2.3718.0 (dnsvr.021114-1947) 843.00 KB (863,232 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\netplwiz.dll
 zipfldr 6.00.3718.0 (dnsvr.021114-1947) 316.00 KB (323,584 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\zipfldr.dll
 sendmail 6.00.3718.0 (dnsvr.021114-1947) 52.00 KB (53,248 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\sendmail.dll
 mydocs 6.00.3718.0 (dnsvr.021114-1947) 87.00 KB (89,088 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\mydocs.dll
 mmsheht 5.2.3718.0 (dnsvr.021114-1947) 49.50 KB (50,688 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\mmsheht.dll
 hhsetup 5.2.3718.0 (dnsvr.021114-1947) 38.00 KB (38,912 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\hhsetup.dll
 cmd 5.2.3718.0 (dnsvr.021114-1947) 370.00 KB (378,880 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\cmd.exe
 wpabaln 5.2.3718.0 (dnsvr.021114-1947) 31.00 KB (31,744 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\wpabaln.exe
 helpctr 5.2.3718.0 (dnsvr.021114-1947) 734.50 KB (752,128 bytes)
 1/27/2003 5:31 PM Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\helpctr.exe
 hcappres 5.2.3718.0 (dnsvr.021114-1947) 6.50 KB (6,656 bytes) 1/27/2003 5:31 PM
 Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\hcappres.dll
 itss 5.2.3718.0 (dnsvr.021114-1947) 119.50 KB (122,368 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\itss.dll
 msxml3 8.40.9214.0 1.06 MB (1,108,992 bytes) 11/15/2002 7:00 AM
 Microsoft Corporation c:\windows\system32\msxml3.dll
 pchshell 5.2.3718.0 (dnsvr.021114-1947) 97.00 KB (99,328 bytes)
 1/27/2003 5:31 PM Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\pchshell.dll
 mlang 6.00.3718.0 (dnsvr.021114-1947) 566.50 KB (580,096 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\mlang.dll
 mshtml 6.00.3718.0 (dnsvr.021114-1947) 2.71 MB (2,837,504 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\mshtml.dll
 msimtf 5.2.3718.0 (dnsvr.021114-1947) 142.50 KB (145,920 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\msimtf.dll

msctf 5.2.3718.0 (dnsvr.021114-1947) 276.00 KB (282,624 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\msctf.dll
 jscript 5.6.0.8028 424.00 KB (434,176 bytes) 11/15/2002 7:00 AM
 Microsoft Corporation c:\windows\system32\jscript.dll
 msls31 3.10.349.0 144.00 KB (147,456 bytes) 11/15/2002 7:00 AM
 Microsoft Corporation c:\windows\system32\msls31.dll
 imm32 5.2.3718.0 (dnsvr.021114-1947) 103.50 KB (105,984 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\imm32.dll
 mshtml 6.00.3718.0 (dnsvr.021114-1947) 434.00 KB (444,416 bytes)
 11/15/2002 7:00 AM Microsoft Corporation
 c:\windows\system32\mshtml.dll
 vbscript 5.6.0.8028 388.00 KB (397,312 bytes) 11/15/2002 7:00 AM
 Microsoft Corporation c:\windows\system32\vbscript.dll
 mfc42 6.05.2283.0 960.00 KB (983,040 bytes) 11/15/2002 7:00 AM
 Microsoft Corporation c:\windows\system32\mfc42.dll
 msinfo 5.2.3718.0 (dnsvr.021114-1947) 358.50 KB (367,104 bytes)
 1/27/2003 5:31 PM Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\msinfo.dll
 mfc42u 6.05.2283.0 960.00 KB (983,040 bytes) 11/15/2002 7:00 AM
 Microsoft Corporation c:\windows\system32\mfc42u.dll
 riched32 5.2.3718.0 (dnsvr.021114-1947) 3.50 KB (3,584 bytes) 11/15/2002 7:00 AM
 Microsoft Corporation c:\windows\system32\riched32.dll
 riched20 5.31.23.1218 395.00 KB (404,480 bytes) 11/15/2002 7:00 AM
 Microsoft Corporation c:\windows\system32\riched20.dll
 helpsvc 5.2.3718.0 (dnsvr.021114-1947) 686.50 KB (702,976 bytes)
 1/27/2003 5:31 PM Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\helpsvc.exe

[Services]

Display Name	Name	State	Start Name	Mode	Service Type
Path	Error Control	Start	Tag	ID	
Alerter	Alerter	Stopped	Manual	Share	Process
c:\windows\system32\svchost.exe	-k local	service	Normal	NT	
AUTHORITY\LocalService	0				
Application Layer Gateway Service		ALG	Stopped	Manual	
Own Process	c:\windows\system32\alg.exe	Normal	NT		
AUTHORITY\LocalService	0				
Application Management	AppMgmt	Stopped	Manual	Share	
Process	c:\windows\system32\svchost.exe	-k netsvc	Normal		
LocalSystem	0				
Windows Audio	AudioSrv	Stopped	Disabled	Share	Process
c:\windows\system32\svchost.exe	-k netsvc	Normal	LocalSystem	0	
Background Intelligent Transfer Service	BITS	Stopped	Manual	Manual	
Share Process	c:\windows\system32\svchost.exe	-k netsvc	Normal		
LocalSystem	0				
Computer Browser	Browser	Stopped	Manual	Share	Process
c:\windows\system32\svchost.exe	-k netsvc	Normal	LocalSystem	0	
Indexing Service	CiSvc	Stopped	Manual	Share	Process
c:\windows\system32\cisvc.exe	Normal	LocalSystem	0		
ClipBook	ClipSrv	Stopped	Disabled	Own	Process
c:\windows\system32\clipsrv.exe	Normal	LocalSystem	0		
COM+ System Application	COMSysApp	Stopped	Manual		
Own Process	c:\windows\system32\dlhhost.exe				
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}	Normal				
LocalSystem	0				
Cryptographic Services	CryptSvc	Stopped	Manual	Share	
Process	c:\windows\system32\svchost.exe	-k netsvc	Normal		
LocalSystem	0				
Distributed File System	Dfs	Stopped	Manual	Own	
Process	c:\windows\system32\dfsrv.exe	Normal	LocalSystem	0	
DHCP Client	Dhcp	Stopped	Manual	Share	Process
c:\windows\system32\svchost.exe	-k network	service	Normal	NT	
AUTHORITY\NetworkService	0				

Logical Disk Manager Administrative Service	dmadmin	Stopped				Network Connections Netman	Running	Manual	Share Process	
Manual	Share Process	c:\windows\system32\dmadmin.exe /com				c:\windows\system32\svchost.exe -k netsvcs	Normal		LocalSystem	0
Normal	LocalSystem	0				Network Location Awareness (NLA)	Nla	Running	Manual	
Logical Disk Managerdmsrvr	Running	Auto	Share Process			Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal		
c:\windows\system32\svchost.exe -k netsvcs	Normal		LocalSystem	0		LocalSystem	0			
DNS Client	Dnscache	Stopped	Manual	Share Process		File Replication	NtFrs	Stopped	Manual	Own Process
c:\windows\system32\svchost.exe -k networkservice	Normal		NT			c:\windows\system32\ntfrs.exe	Ignore		LocalSystem	0
AUTHORITY\NetworkService	0					NT LM Security Support Provider	NtLmSsp	Stopped	Manual	
Error Reporting Service	ERSvc	Running	Auto	Share		Share Process	c:\windows\system32\lsass.exe		Normal	
Process	c:\windows\system32\svchost.exe -k winerr	Ignore				LocalSystem	0			
LocalSystem	0					Removable Storage	NtmsSvc	Stopped	Manual	Share Process
Event Log Eventlog	Running	Auto	Share Process			c:\windows\system32\svchost.exe -k netsvcs	Normal		LocalSystem	0
c:\windows\system32\services.exe	Normal		LocalSystem	0		Plug and Play	PlugPlay	Running	Auto	Share Process
COM+ Event System	EventSystem	Running	Manual	Share		c:\windows\system32\services.exe	Normal		LocalSystem	0
Process	c:\windows\system32\svchost.exe -k netsvcs	Normal				IPSEC Services	PolicyAgent	Stopped	Manual	Share
LocalSystem	0					Process	c:\windows\system32\lsass.exe	Normal	LocalSystem	0
Mylex Global Array Manager Server	gamscm	Stopped	Manual			Protected Storage	ProtectedStorage	Running	Auto	Share
Own Process	system32\gamsvr\gamscm.exe	Normal				Process	c:\windows\system32\lsass.exe	Normal	LocalSystem	0
LocalSystem	0					Remote Access Auto Connection Manager	RasAuto	Stopped	Manual	
Help and Support	helpsvc	Running	Manual	Share Process		Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal		
c:\windows\system32\svchost.exe -k netsvcs	Normal		LocalSystem	0		LocalSystem	0			
Human Interface Device Access	HidServ	Stopped	Disabled	Share		Remote Access Connection Manager	RasMan	Stopped	Manual	
Process	c:\windows\system32\svchost.exe -k netsvcs	Normal				Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal		
LocalSystem	0					LocalSystem	0			
HTTP SSLHTTPFilter	Stopped	Manual	Share Process			Remote Desktop Help Session Manager	RDSessMgr	Stopped		
c:\windows\system32\lsass.exe	Normal		LocalSystem	0		Manual	Own Process	c:\windows\system32\sessmgr.exe		
IMAPI CD-Burning COM Service	ImapiService	Stopped				Normal	LocalSystem	0		
Disabled	Own Process	c:\windows\system32\imapi.exe	Normal			Routing and Remote Access	RemoteAccess	Stopped	Disabled	
LocalSystem	0					Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal		
Intersite Messaging	IsmServ	Stopped	Disabled	Own Process		LocalSystem	0			
c:\windows\system32\ismssrv.exe	Normal		LocalSystem	0		Remote Registry	RemoteRegistry	Stopped	Manual	Share
Kerberos Key Distribution Center	kdc	Stopped	Disabled			Process	c:\windows\system32\svchost.exe -k regsvc	Normal	NT	
Share Process	c:\windows\system32\lsass.exe	Normal				AUTHORITY\LocalService	0			
LocalSystem	0					Remote Procedure Call (RPC) Locator	RpcLocator	Stopped		
Server	lanmanserver	Stopped	Manual	Share Process		Manual	Own Process	c:\windows\system32\locator.exe	Normal	
c:\windows\system32\svchost.exe -k netsvcs	Normal		LocalSystem	0		NT AUTHORITY\NetworkService	0			
Workstation	lanmanworkstation	Running	Auto	Share		Remote Procedure Call (RPC)	RpcSs	Running	Auto	Share
Process	c:\windows\system32\svchost.exe -k netsvcs	Normal				Process	c:\windows\system32\svchost -k rpss	Normal		
LocalSystem	0					LocalSystem	0			
License Logging	LicenseService	Stopped	Disabled	Own		Resultant Set of Policy Provider	RSOPProv	Stopped	Manual	Share
Process	c:\windows\system32\llsrv.exe	Normal	NT			Process	c:\windows\system32\rsopprov.exe	Normal		
AUTHORITY\NetworkService	0					LocalSystem	0			
TCP/IP NetBIOS Helper	LmHosts	Running	Auto	Share		Special Administration Console Helper	sacsvr	Stopped	Manual	
Process	c:\windows\system32\svchost.exe -k localservice	Normal				Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal		
NT AUTHORITY\LocalService	0					LocalSystem	0			
Messenger Messenger	Stopped	Disabled	Share Process			Security Accounts Manager	SamSs	Running	Auto	Share
c:\windows\system32\svchost.exe -k netsvcs	Normal		LocalSystem	0		Process	c:\windows\system32\lsass.exe	Normal	LocalSystem	0
NetMeeting Remote Desktop Sharing	mnmsrv	Stopped	Disabled			Smart Card	SCardSvr	Stopped	Manual	Share Process
Own Process	c:\windows\system32\mnmsrv.exe	Normal				c:\windows\system32\scardsvr.exe	Ignore		NT	
LocalSystem	0					AUTHORITY\LocalService	0			
Distributed Transaction Coordinator	MSDTC	Running	Auto			Task Scheduler	Schedule	Stopped	Manual	Share Process
Own Process	c:\windows\system32\msdtc.exe	Normal	NT			c:\windows\system32\svchost.exe -k netsvcs	Normal		LocalSystem	0
AUTHORITY\NetworkService	0					Secondary Logon	seclogon	Stopped	Manual	Share Process
Windows Installer	MSIServer	Stopped	Manual	Share Process		c:\windows\system32\svchost.exe -k netsvcs	Ignore		LocalSystem	0
c:\windows\system32\msiexec.exe /v	Normal		LocalSystem	0		System Event Notification	SENS	Running	Manual	Share
MSSQLSERVER	MSSQLSERVER	Stopped	Disabled	Own		Process	c:\windows\system32\svchost.exe -k netsvcs	Normal		
Process	c:\progra~1\micro~1\mssql\bin\sqlservr.exe	Normal				LocalSystem	0			
LocalSystem	0					Internet Connection Firewall (ICF) / Internet Connection Sharing (ICS)	SharedAccess	Stopped	Disabled	Share Process
MSSQLServerADHelper	MSSQLServerADHelper	Stopped				c:\windows\system32\svchost.exe -k netsvcs	Normal		LocalSystem	0
Manual	Own Process	c:\program files\microsoft sql				Shell Hardware Detection	ShellHWDetection	Running	Auto	
server\80\tools\bin\sqladhlp.exe	Normal		LocalSystem	0		Share Process	c:\windows\system32\svchost.exe -k netsvcs	Ignore		
Network DDE	NetDDE	Stopped	Disabled	Share Process		LocalSystem	0			
c:\windows\system32\netdde.exe	Normal		LocalSystem	0		Print Spooler	Spooler	Stopped	Manual	Own Process
Network DDE DSDMNetDDEdsdm	Stopped	Disabled	Share			c:\windows\system32\spoolsv.exe	Normal		LocalSystem	0
Process	c:\windows\system32\netdde.exe	Normal	LocalSystem	0		SQLSERVERAGENT	SQLSERVERAGENT	Stopped		
Net Logon Netlogon	Stopped	Manual	Share Process			Manual	Own Process	c:\progra~1\micro~1\mssql\bin\sqlagent.exe		
c:\windows\system32\lsass.exe	Normal		LocalSystem	0		Normal	LocalSystem	0		

Windows Image Acquisition (WIA)	stisvc	Stopped	Disabled	Share Process		Accessories\Entertainment	Default User:Accessories\Entertainment
Share Process	c:\windows\system32\svchost.exe -k imgsvc	Normal				Default User	
NT AUTHORITY\LocalService	0					Startup	Default User:Startup
Microsoft Software Shadow Copy Provider	swprv	Stopped	Manual	Own Process		Accessories	All Users:Accessories All Users
Own Process	c:\windows\system32\svchost.exe -k swprv	Normal				Accessories\Accessibility	All Users:Accessories\Accessibility
LocalSystem	0					All Users	
Performance Logs and Alerts	SysmonLog	Stopped	Manual	Own Process		Accessories\Communications	All Users:Accessories\Communications
Own Process	c:\windows\system32\smlogsvc.exe	Normal				All Users	
NT Authority\NetworkService	0					Accessories\Entertainment	All Users:Accessories\Entertainment
Telephony TapiSrv	Stopped	Manual	Share Process			All Users	
c:\windows\system32\svchost.exe -k tapisrv	Normal	LocalSystem	0			Accessories\System Tools	All Users:Accessories\System Tools
Terminal Services	TermService	Running	Manual	Share Process		All Users	
Process	c:\windows\system32\svchost.exe -k termsvcs	Normal				Administrative Tools	All Users:Administrative Tools All Users
LocalSystem	0					Microsoft SQL Server	All Users:Microsoft SQL Server All Users
Themes	Themes	Stopped	Disabled	Share Process		Startup	All Users:Startup All Users
c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0			Accessories	NT AUTHORITY\SYSTEM:Accessories NT
Telnet	TlntSvr	Stopped	Disabled	Own Process		AUTHORITY\SYSTEM	
c:\windows\system32\tlntsvr.exe	Normal	NT AUTHORITY\LocalService	0			Accessories\Accessibility	NT
Distributed Link Tracking Server	TrkSvr	Stopped	Disabled	Share Process		AUTHORITY\SYSTEM:Accessories\Accessibility	NT
Process	c:\windows\system32\svchost.exe -k netsvcs	Normal				AUTHORITY\SYSTEM	
LocalSystem	0					Accessories\Entertainment	NT
Distributed Link Tracking Client	TrkWks	Stopped	Manual	Share Process		AUTHORITY\SYSTEM:Accessories\Entertainment	NT
Process	c:\windows\system32\svchost.exe -k netsvcs	Normal				AUTHORITY\SYSTEM	
LocalSystem	0					Startup	NT AUTHORITY\SYSTEM:Startup NT
Terminal Services Session Directory	Tssdis	Stopped	Disabled	Own Process		AUTHORITY\SYSTEM	
Own Process	c:\windows\system32\tssdis.exe	Normal				Accessories	IBMSERVER3\Administrator:Accessories
LocalSystem	0					IBMSERVER3\Administrator	
Upload Manager	uploadmgr	Stopped	Manual	Share Process		Accessories\Accessibility	
c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0			IBMSERVER3\Administrator:Accessories\Accessibility	
Uninterruptible Power Supply	UPS	Stopped	Manual	Own Process		IBMSERVER3\Administrator	
Process	c:\windows\system32\ups.exe	Normal	LocalSystem	0		Accessories\Entertainment	
Virtual Disk Service	vds	Stopped	Manual	Own Process		IBMSERVER3\Administrator:Accessories\Entertainment	
c:\windows\system32\vds.exe	Normal	LocalSystem	0			IBMSERVER3\Administrator	
Volume Shadow Copy	VSS	Stopped	Manual	Own Process		Administrative Tools	IBMSERVER3\Administrator:Administrative Tools
Process	c:\windows\system32\vssvc.exe	Normal	LocalSystem	0		IBMSERVER3\Administrator	
Windows Time	W32Time	Running	Auto	Share Process		Startup	IBMSERVER3\Administrator:Startup
c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0			IBMSERVER3\Administrator	
WebClient	WebClient	Stopped	Disabled	Share Process			
c:\windows\system32\svchost.exe -k localservice	Normal	NT				[Startup Programs]	
AUTHORITY\LocalService	0					Program	Command User NameLocation
WinHTTP Web Proxy Auto-Discovery Service	WinHttpAutoProxySvc	Stopped	Manual	Share Process		desktop	desktop.ini NT AUTHORITY\SYSTEM Startup
c:\windows\system32\svchost.exe -k localservice	Normal	NT AUTHORITY\LocalService	0			desktop	desktop.ini IBMSERVER3\Administrator Startup
Windows Management Instrumentation	winmgmt	Running	Auto	Share Process		desktop	desktop.ini.DEFAULT Startup
Share Process	c:\windows\system32\svchost.exe -k netsvcs	Ignore				desktop	desktop.ini All Users Common Startup
LocalSystem	0						
Portable Media Serial Number Service	WmdmPmSN	Stopped				[OLE Registration]	
Manual	Share Process	c:\windows\system32\svchost.exe -k netsvcs				Object	Local Server
Normal	LocalSystem	0				Sound (OLE2)	sndrec32.exe
Windows Management Instrumentation Driver Extensions	Wmi	Stopped	Manual	Share Process		Media Clip	mplay32.exe
c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0			Video Clip	mplay32.exe /avi
WMI Performance Adapter	WmiApSrv	Stopped	Manual	Own Process		MIDI Sequence	mplay32.exe /mid
Own Process	c:\windows\system32\wbem\wmiaprv.exe	Normal				Sound	Not Available
LocalSystem	0					Media Clip	Not Available
Automatic Updates	wuauerv	Stopped	Manual	Share Process		WordPad Document	"%programfiles%\windows nt\accessories\wordpad.exe"
c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0			Windows Media Services DRM Storage object	Not Available
Wireless Configuration	WZCSVC	Stopped	Manual	Share Process		Bitmap Image	mspaint.exe
Process	c:\windows\system32\svchost.exe -k netsvcs	Normal				[Windows Error Reporting]	
LocalSystem	0					Time	Type Details
						[Internet Settings]	
[Program Groups]						[Internet Explorer]	
Group Name	Name	User Name					
Accessories	Default User:Accessories	Default User					
Accessories\Accessibility	Default User:Accessories\Accessibility						
Default User							

[Following are sub-categories of this main category]
 [Summary]

Item	Value
Version	6.0.3718.0
Build	63718
Application Path	C:\Program Files\Internet Explorer
Language	English (United States)
Active Printer	Not Available
Cipher Strength	128-bit
Content Advisor	Disabled
IEAK Install	No

[File Versions]

File	Version	Size	Date	Path	Company
actxprxy.dll	6.0.3718.0	91 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
advpack.dll	6.0.3718.0	94 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
asctrls.ocx	6.0.3718.0	90 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
browseui.dll	6.0.3718.0	62 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
cdview.dll	6.0.3718.0	142 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
comctl32.dll	5.82.3718.0	561 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
dxtrans.dll	6.3.3718.0	192 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
dxtmsft.dll	6.3.3718.0	333 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iecontl.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3718.0	296 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iepeers.dll	6.0.3718.0	230 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iesetup.dll	6.0.3718.0	57 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
ieunit.inf	Not Available	19 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Not Available
ieexplore.exe	6.0.3718.0	90 KB	11/15/2002 7:00:00 AM	C:\Program Files\Internet Explorer	Microsoft Corporation
imgutil.dll	6.0.3718.0	30 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
inetctl.cpl	6.0.3718.0	294 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
inetpl.dll	6.0.3718.0	108 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
inseng.dll	6.0.3718.0	71 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mlang.dll	6.0.3718.0	567 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msencode.dll	2002.10.4.0	112 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Not Available
mshta.exe	6.0.3718.0	26 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mshtml.dll	6.0.3718.0	2,771 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mshtml.tlb	6.0.3718.0	1,319 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation

mshtml.dll	6.0.3718.0	434 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mshtml.tlb	6.0.3718.0	55 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msident.dll	6.0.3718.0	47 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msidntld.dll	6.0.3718.0	15 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msieftp.dll	6.0.3718.0	230 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
msrating.dll	6.0.3718.0	132 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
mstime.dll	6.0.3718.0	491 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
occache.dll	6.0.3718.0	89 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
proctexe.ocx	6.3.3718.0	78 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Intel Corporation
sendmail.dll	6.0.3718.0	52 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
shdoclc.dll	6.0.3718.0	521 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
shdocvw.dll	6.0.3718.0	1,327 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
shfolder.dll	6.0.3718.0	23 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
shlwapi.dll	6.0.3718.0	272 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
tdc.ocx	1.3.0.3130	57 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
url.dll	6.0.3718.0	36 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
urlmon.dll	6.0.3718.0	458 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
webcheck.dll	6.0.3718.0	256 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
wininet.dll	6.0.3718.0	592 KB	11/15/2002 7:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation

[Connectivity]

Item	Value
Connection Preference	Never dial

LAN Settings

AutoConfigProxy	Not Available
AutoProxyDetectMode	Disabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

[Following are sub-categories of this main category]
 [Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\NetworkService\Local Settings\Temporary Internet Files
Total Disk Space	Not Available
Available Disk Space	Not Available
Maximum Cache Size	Not Available
Available Cache Size	Not Available

[List of Objects]

Program File Status CodeBase
No cached object information available

[Content]

[Following are sub-categories of this main category]
[Summary]

Item	Value
Content Advisor	Disabled

[Personal Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
No personal certificate information available				

[Other People Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
No other people certificate information available				

[Publishers]

Name
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Medium-low
Trusted sites	Low
Internet	Medium
Restricted sites	High

Microsoft SQL Server 2000 Startup Parameters

Microsoft SQL Server Startup Parameters

```
C:\Program Files\Microsoft SQL Server\MSSQL\Binn\sqlservr -c -x -t3502 -g150
```

where:

- c Start SQL Server independent of the Service Control Manager
- x Disable the keeping of CPU time and cache hit ratio statistics
- t3502 writes a message to the SQL Server Errorlog showing the beginning and ending time of each checkpoint
- g150 Reserve 150MB for non-buffer pool allocations

Microsoft SQL Server 2000 Configuration Parameters

```
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11>  
-- File:   VERSION.SQL  
--       Microsoft TPC-C Benchmark Kit Ver. 4.22  
--       Copyright Microsoft, 2001  
-- Purpose: Returns SQL Server version string
```

```
print " "
```

```
select convert(char(30), getdate(),9)  
print " "
```

Feb 22 2003 8:45:25:373AM

(1 row affected)

```
1> 2> 3>  
select @@version
```


Microsoft SQL Server 2000 - 8.00.760 (Intel X86)
Dec 17 2002 14:22:05
Cop
yright (c) 1988-2003 Microsoft Corporation
Enterprise Edition on Windo
ws NT 5.2 (Build 3718:)

(1 row affected)

```
1> 2>  
1> 2> 3> 4> 5> 6> 7> 8> 9> 10>  
-- File:   CONFIG.SQL  
--       Microsoft TPC-C Benchmark Kit Ver. 4.22  
--       Copyright Microsoft, 2001  
-- Purpose: Collects SQL Server configuration parameters
```

```
print " "  
select convert(char(30), getdate(),9)  
print " "
```

Feb 22 2003 8:45:26:343AM

(1 row affected)

```
1> 2> 3> DBCC execution completed. If DBCC printed error messages, contact  
your system administrator.  
Configuration option 'show advanced options' changed from 1 to 1. Run the  
RECONFIGURE statement to install.
```

```
sp_configure "show advanced",1  
1> 2> reconfigure with override  
1> 2> sp_configure
```

name	minimum	maximum
config_value	run_value	
affinity mask	-2147483648	2147483647
255	255	
allow updates	0	1
0		
awe enabled	0	1
1		
c2 audit mode	0	1
0		
cost threshold for parallelism	0	32767
5	5	

```

Cross DB Ownership Chaining          0    1
0    0
cursor threshold                    -1 2147483647
-1    -1
default full-text language          0 2147483647
1033    1033
default language                    0    9999    0
0
fill factor (%)                     0    100    0
0
index create memory (KB)            704 2147483647
0    0
lightweight pooling                 0    1    1
1
locks                               5000 2147483647    0
0
max degree of parallelism           0    32    0
0
max server memory (MB)              4 2147483647
2147483647 2147483647
max text repl size (B)              0 2147483647
65536    65536
max worker threads                  32    32767
440    440
media retention                     0    365    0
0
min memory per query (KB)           512 2147483647
1024    1024
min server memory (MB)              0 2147483647
0    0
nested triggers                     0    1    1
1
network packet size (B)             512    65536
4096    4096
open objects                        0 2147483647    0
0
priority boost                      0    1    1
1
query governor cost limit           0 2147483647
0    0
query wait (s)                     -1 2147483647    -1
-1
recovery interval (min)             0    32767
88    88
remote access                       0    1    1
1
remote login timeout (s)            0 2147483647
20    20
remote proc trans                   0    1    0
0
remote query timeout (s)            0 2147483647
600    600
scan for startup procs              0    1    0
0
set working set size                0    1    0
0
show advanced options               0    1    1
1
two digit year cutoff               1753    9999
2049    2049
user connections                    0    32767    0
0
user options                        0    32767    0
0
l>

```

Mylex eXtremeRAID 2000 Controller 0

```

GCFVERSION=2.00;
Begin
BeginGroup
PhysicalDevice0 = Channel=0, Target=1, Size=34698MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice1 = Channel=1, Target=9, Size=34698MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice2 = Channel=0, Target=2, Size=34698MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice3 = Channel=1, Target=10, Size=34698MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice4 = Channel=0, Target=3, Size=34698MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice5 = Channel=1, Target=11, Size=34698MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice6 = Channel=0, Target=4, Size=34698MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice7 = Channel=1, Target=12, Size=34698MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
IntermediateDevice0 = StripeSize=64KB, Raid=1, WriteThrough=1,
Size=34696MB,
(PhysicalDevice0, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks),
(PhysicalDevice1, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks);
IntermediateDevice1 = StripeSize=64KB, Raid=1, WriteThrough=1,
Size=34696MB,
(PhysicalDevice2, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks),
(PhysicalDevice3, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks);
IntermediateDevice2 = StripeSize=64KB, Raid=1, WriteThrough=1,
Size=34696MB,
(PhysicalDevice4, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks),
(PhysicalDevice5, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks);
IntermediateDevice3 = StripeSize=64KB, Raid=1, WriteThrough=1,
Size=34696MB,
(PhysicalDevice6, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks),
(PhysicalDevice7, StartAddress=0MB/0Blocks,
Size=34696MB/71057408Blocks);
LogicalDevice2 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=138784MB, BIOSGeometry=8GB,
(IntermediateDevice0, StartAddress=0MB,
Size=34696MB),

```

Disk Controller Configuration Parameters

```

Size=34696MB),
(IntermediateDevice1, StartAddress=0MB,
Size=34696MB),
(IntermediateDevice2, StartAddress=0MB,
Size=34696MB),
(IntermediateDevice3, StartAddress=0MB,
Size=34696MB);
EndGroup
BeginControllerParameter
ControllerName = eXtremeRAID 2000;
ControllerType = 28;
FirmwareVersion = 7.00;
CacheLineSize = 8KB;
AutomaticRebuildRate = 50;
BackgroundInitializeRate = 50;
ConsistencyCheckRate = 50;
MORERate = 50;
InitiatorID = 7;
DevicesPerSpin = 2;
SequentialDelay = 6S;
EnableDriveSizing = 0;
EnableClustering = 0;
EnableBGInit = 1;
EnableBiosLoadDelay = 0;
EnableForcedUnitAccess = 0;
DisableBios = 0;
EnableCDROMBoot = 0;
EnableStorageWorks = 0;
EnableSAFTE = 0;
EnableSES = 0;
EnableARM = 1;
EnableOFM = 1;
OEMCode = 0;
StartupOption = 0;
EnableTempOffline = 0;
EnablePatrolRead = 0;
EnableSmartMode = 0;
DlyBtwnIterations = 336;
SmartScanInterval = 0;
EndControllerParameter
End

```

Mylex eXtremeRAID 2000 Controller 1

```

GCFVERSION=2.00;
Begin
BeginGroup
PhysicalDevice0 = Channel=0, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice1 = Channel=0, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice2 = Channel=0, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice3 = Channel=0, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice4 = Channel=0, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;

```

```

PhysicalDevice5 = Channel=0, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice6 = Channel=0, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice7 = Channel=0, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice8 = Channel=0, Target=9, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice9 = Channel=0, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice10 = Channel=0, Target=11, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice11 = Channel=0, Target=12, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice12 = Channel=0, Target=13, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice13 = Channel=0, Target=14, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice14 = Channel=1, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice15 = Channel=1, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice16 = Channel=1, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice17 = Channel=1, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice18 = Channel=1, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice19 = Channel=1, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice20 = Channel=1, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice21 = Channel=1, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;

```


PhysicalDevice22 = Channel=1, Target=9, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice23 = Channel=1, Target=10, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice24 = Channel=1, Target=11, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice25 = Channel=1, Target=12, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice26 = Channel=1, Target=13, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice27 = Channel=1, Target=14, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice28 = Channel=2, Target=0, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice29 = Channel=2, Target=1, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice30 = Channel=2, Target=2, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice31 = Channel=2, Target=3, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice32 = Channel=2, Target=4, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice33 = Channel=2, Target=5, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice34 = Channel=2, Target=6, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice35 = Channel=2, Target=8, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice36 = Channel=2, Target=9, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice37 = Channel=2, Target=10, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice38 = Channel=2, Target=11, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;

PhysicalDevice39 = Channel=2, Target=12, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice40 = Channel=2, Target=13, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice41 = Channel=2, Target=14, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice42 = Channel=3, Target=0, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice43 = Channel=3, Target=1, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice44 = Channel=3, Target=2, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice45 = Channel=3, Target=3, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice46 = Channel=3, Target=4, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice47 = Channel=3, Target=5, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice48 = Channel=3, Target=6, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1,
 Size=121352MB,
 (PhysicalDevice0, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice1, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice2, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice3, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice4, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice5, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice6, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks);
 IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1,
 Size=121352MB,
 (PhysicalDevice7, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice8, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice9, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice10, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice11, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),

```

        (PhysicalDevice12, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice13, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks);
        IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice14, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice15, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice16, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice17, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice18, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice19, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice20, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks);
        IntermediateDevice3 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice21, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice22, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice23, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice24, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice25, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice26, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice27, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks);
        IntermediateDevice4 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice28, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice29, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice30, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice31, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice32, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice33, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice34, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks);
        IntermediateDevice5 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice35, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice36, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice37, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice38, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice39, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice40, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice41, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks);

```

```

        IntermediateDevice6 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice42, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice43, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice44, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice45, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice46, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice47, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks),
        (PhysicalDevice48, StartAddress=0MB/0Blocks,
Size=17336MB/35504128BBlocks);
        LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=849464MB, BIOSGeometry=8GB,
        (IntermediateDevice0, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice1, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice2, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice3, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice4, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice5, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice6, StartAddress=0MB,
Size=121352MB);
EndGroup
BeginControllerParameter
        ControllerName = eXtremeRAID 2000;
        ControllerType = 28;
        FirmwareVersion = 7.00;
        CacheLineSize = 8KB;
        AutomaticRebuildRate = 50;
        BackgroundInitializeRate = 50;
        ConsistencyCheckRate = 50;
        MORERate = 50;
        InitiatorID = 7;
        DevicesPerSpin = 2;
        SequentialDelay = 6S;
        EnableDriveSizing = 0;
        EnableClustering = 0;
        EnableBGInit = 1;
        EnableBiosLoadDelay = 0;
        EnableForcedUnitAccess = 0;
        DisableBios = 0;
        EnableCDROMBoot = 0;
        EnableStorageWorks = 0;
        EnableSAFTE = 0;
        EnableSES = 0;
        EnableARM = 1;
        EnableOFM = 1;
        OEMCode = 0;
        StartupOption = 0;
        EnableTempOffline = 0;
        EnablePatrolRead = 0;
        EnableSmartMode = 0;
        DlyBtwnIterations = 0;
        SmartScanInterval = 0;
EndControllerParameter
End

```

Mylex eXtremeRAID 2000 Controller 2

GCFVERSION=2.00;
Begin
BeginGroup
PhysicalDevice0 = Channel=0, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice1 = Channel=0, Target=9, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice2 = Channel=0, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice3 = Channel=0, Target=11, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice4 = Channel=0, Target=12, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice5 = Channel=0, Target=13, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice6 = Channel=0, Target=14, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice7 = Channel=1, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice8 = Channel=1, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice9 = Channel=1, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice10 = Channel=1, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice11 = Channel=1, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice12 = Channel=1, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice13 = Channel=1, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice14 = Channel=1, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice15 = Channel=1, Target=9, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice16 = Channel=1, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice17 = Channel=1, Target=11, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice18 = Channel=1, Target=12, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice19 = Channel=1, Target=13, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice20 = Channel=1, Target=14, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice21 = Channel=2, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice22 = Channel=2, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice23 = Channel=2, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice24 = Channel=2, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice25 = Channel=2, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice26 = Channel=2, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice27 = Channel=2, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice28 = Channel=2, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice29 = Channel=2, Target=9, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice30 = Channel=2, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice31 = Channel=2, Target=11, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice32 = Channel=2, Target=12, Size=17340MB,
State=Online,

```

TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice33 = Channel=2, Target=13, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice34 = Channel=2, Target=14, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice0, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice1, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice2, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice3, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice4, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice5, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice6, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice7, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice8, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice9, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice10, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice11, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice12, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice13, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice14, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice15, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice16, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice17, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice18, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice19, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice20, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice3 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice21, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice22, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice23, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice24, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),

```

```

(PhysicalDevice25, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice26, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice27, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice4 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
(PhysicalDevice28, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice29, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice30, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice31, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice32, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice33, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
(PhysicalDevice34, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=606760MB, BIOSGeometry=8GB,
(IntermediateDevice0, StartAddress=0MB,
Size=121352MB),
(IntermediateDevice1, StartAddress=0MB,
Size=121352MB),
(IntermediateDevice2, StartAddress=0MB,
Size=121352MB),
(IntermediateDevice3, StartAddress=0MB,
Size=121352MB),
(IntermediateDevice4, StartAddress=0MB,
Size=121352MB);
EndGroup
BeginControllerParameter
ControllerName = eXtremeRAID 2000;
ControllerType = 28;
FirmwareVersion = 7.00;
CacheLineSize = 8KB;
AutomaticRebuildRate = 50;
BackgroundInitializeRate = 50;
ConsistencyCheckRate = 50;
MORERate = 50;
InitiatorID = 7;
DevicesPerSpin = 2;
SequentialDelay = 6S;
EnableDriveSizing = 0;
EnableClustering = 0;
EnableBGInit = 1;
EnableBiosLoadDelay = 0;
EnableForcedUnitAccess = 0;
DisableBios = 0;
EnableCDROMBoot = 0;
EnableStorageWorks = 0;
EnableSAFTE = 0;
EnableSES = 0;
EnableARM = 1;
EnableOFM = 1;
OEMCode = 0;
StartupOption = 0;
EnableTempOffline = 0;
EnablePatrolRead = 0;
EnableSmartMode = 0;
DlyBtwnIterations = 0;
SmartScanInterval = 0;
EndControllerParameter
End

```

Mylex eXtremeRAID 2000 Controller 3

GCFVERSION=2.00;
Begin
BeginGroup
PhysicalDevice0 = Channel=0, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice1 = Channel=0, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice2 = Channel=0, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice3 = Channel=0, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice4 = Channel=0, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice5 = Channel=0, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice6 = Channel=0, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice7 = Channel=0, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice8 = Channel=0, Target=9, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice9 = Channel=0, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice10 = Channel=0, Target=11, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice11 = Channel=0, Target=12, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice12 = Channel=0, Target=13, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice13 = Channel=0, Target=14, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice14 = Channel=1, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;

PhysicalDevice15 = Channel=1, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice16 = Channel=1, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice17 = Channel=1, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice18 = Channel=1, Target=4, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice19 = Channel=1, Target=5, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice20 = Channel=1, Target=6, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice21 = Channel=1, Target=8, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice22 = Channel=1, Target=9, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice23 = Channel=1, Target=10, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice24 = Channel=1, Target=11, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice25 = Channel=1, Target=12, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice26 = Channel=1, Target=13, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice27 = Channel=1, Target=14, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice28 = Channel=2, Target=0, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice29 = Channel=2, Target=1, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice30 = Channel=2, Target=2, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
PhysicalDevice31 = Channel=2, Target=3, Size=17340MB,
State=Online,
TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;

PhysicalDevice32 = Channel=2, Target=4, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice33 = Channel=2, Target=5, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice34 = Channel=2, Target=6, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice35 = Channel=2, Target=8, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice36 = Channel=2, Target=9, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice37 = Channel=2, Target=10, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice38 = Channel=2, Target=11, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice39 = Channel=2, Target=12, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice40 = Channel=2, Target=13, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice41 = Channel=2, Target=14, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice42 = Channel=3, Target=8, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice43 = Channel=3, Target=9, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice44 = Channel=3, Target=10, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice45 = Channel=3, Target=11, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice46 = Channel=3, Target=12, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice47 = Channel=3, Target=13, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice48 = Channel=3, Target=14, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;

IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1,
 Size=121352MB,
 (PhysicalDevice0, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice1, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice2, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice3, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice4, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice5, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice6, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks);
 IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1,
 Size=121352MB,
 (PhysicalDevice7, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice8, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice9, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice10, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice11, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice12, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice13, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks);
 IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1,
 Size=121352MB,
 (PhysicalDevice14, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice15, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice16, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice17, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice18, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice19, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice20, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks);
 IntermediateDevice3 = StripeSize=64KB, Raid=0, WriteThrough=1,
 Size=121352MB,
 (PhysicalDevice21, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice22, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice23, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice24, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice25, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice26, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice27, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks);
 IntermediateDevice4 = StripeSize=64KB, Raid=0, WriteThrough=1,
 Size=121352MB,
 (PhysicalDevice28, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),

```

        (PhysicalDevice29, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice30, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice31, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice32, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice33, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice34, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
    IntermediateDevice5 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice35, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice36, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice37, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice38, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice39, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice40, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice41, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
    IntermediateDevice6 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice42, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice43, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice44, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice45, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice46, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice47, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice48, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
    LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=849464MB, BIOSGeometry=8GB,
        (IntermediateDevice0, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice1, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice2, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice3, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice4, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice5, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice6, StartAddress=0MB,
Size=121352MB);
EndGroup
BeginControllerParameter
    ControllerName = eXtremeRAID 2000;
    ControllerType = 28;
    FirmwareVersion = 7.00;
    CacheLineSize = 8KB;
    AutomaticRebuildRate = 50;
    BackgroundInitializeRate = 50;

```

```

ConsistencyCheckRate = 50;
MORERate = 50;
InitiatorID = 7;
DevicesPerSpin = 2;
SequentialDelay = 6S;
EnableDriveSizing = 0;
EnableClustering = 0;
EnableBGInit = 1;
EnableBiosLoadDelay = 0;
EnableForcedUnitAccess = 0;
DisableBios = 0;
EnableCDROMBoot = 0;
EnableStorageWorks = 0;
EnableSAFTE = 0;
EnableSES = 0;
EnableARM = 1;
EnableOFM = 1;
OEMCode = 0;
StartupOption = 0;
EnableTempOffline = 0;
EnablePatrolRead = 0;
EnableSmartMode = 0;
DlyBtwnIterations = 336;
SmartScanInterval = 0;

```

EndControllerParameter

End

Mylex eXtremeRAID 2000 Controller 4

GCFVERSION=2.00;

Begin

BeginGroup

PhysicalDevice0 = Channel=0, Target=0, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,

MaxTag=16;

PhysicalDevice1 = Channel=0, Target=1, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,

MaxTag=16;

PhysicalDevice2 = Channel=0, Target=2, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,

MaxTag=16;

PhysicalDevice3 = Channel=0, Target=3, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,

MaxTag=16;

PhysicalDevice4 = Channel=0, Target=4, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,

MaxTag=16;

PhysicalDevice5 = Channel=0, Target=5, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,

MaxTag=16;

PhysicalDevice6 = Channel=0, Target=6, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,

MaxTag=16;

PhysicalDevice7 = Channel=1, Target=0, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,

MaxTag=16;

PhysicalDevice8 = Channel=1, Target=1, Size=17340MB,
State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice9 = Channel=1, Target=2, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice10 = Channel=1, Target=3, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice11 = Channel=1, Target=4, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice12 = Channel=1, Target=5, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice13 = Channel=1, Target=6, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice14 = Channel=1, Target=8, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice15 = Channel=1, Target=9, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice16 = Channel=1, Target=10, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice17 = Channel=1, Target=11, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice18 = Channel=1, Target=12, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice19 = Channel=1, Target=13, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice20 = Channel=1, Target=14, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice21 = Channel=2, Target=0, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice22 = Channel=2, Target=1, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice23 = Channel=2, Target=2, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice24 = Channel=2, Target=3, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice25 = Channel=2, Target=4, Size=17340MB,
 State=Online,

TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice26 = Channel=2, Target=5, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice27 = Channel=2, Target=6, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice28 = Channel=2, Target=8, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice29 = Channel=2, Target=9, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice30 = Channel=2, Target=10, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice31 = Channel=2, Target=11, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice32 = Channel=2, Target=12, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice33 = Channel=2, Target=13, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 PhysicalDevice34 = Channel=2, Target=14, Size=17340MB,
 State=Online,
 TransferSpeed=80MHz, TransferWidth=16Bit,
 MaxTag=16;
 IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1,
 Size=121352MB,
 (PhysicalDevice0, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice1, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice2, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice3, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice4, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice5, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice6, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks);
 IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1,
 Size=121352MB,
 (PhysicalDevice7, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice8, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice9, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice10, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice11, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),
 (PhysicalDevice12, StartAddress=0MB/0Blocks,
 Size=17336MB/35504128Blocks),


```

        (PhysicalDevice13, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
    IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice14, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice15, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice16, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice17, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice18, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice19, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice20, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
    IntermediateDevice3 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice21, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice22, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice23, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice24, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice25, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice26, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice27, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
    IntermediateDevice4 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=121352MB,
        (PhysicalDevice28, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice29, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice30, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice31, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice32, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice33, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
        (PhysicalDevice34, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
    LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=606760MB, BIOSGeometry=8GB,
        (IntermediateDevice0, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice1, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice2, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice3, StartAddress=0MB,
Size=121352MB),
        (IntermediateDevice4, StartAddress=0MB,
Size=121352MB);
    EndGroup
    BeginControllerParameter
        ControllerName = eXtremeRAID 2000;
        ControllerType = 28;
        FirmwareVersion = 7.00;
        CacheLineSize = 8KB;

```

```

AutomaticRebuildRate = 50;
BackgroundInitializeRate = 50;
ConsistencyCheckRate = 50;
MORERate = 50;
InitiatorID = 7;
DevicesPerSpin = 2;
SequentialDelay = 6S;
EnableDriveSizing = 0;
EnableClustering = 0;
EnableBGInit = 1;
EnableBiosLoadDelay = 0;
EnableForcedUnitAccess = 0;
DisableBios = 0;
EnableCDROMBoot = 0;
EnableStorageWorks = 0;
EnableSAFTE = 0;
EnableSES = 0;
EnableARM = 1;
EnableOFM = 1;
OEMCode = 0;
StartupOption = 0;
EnableTempOffline = 0;
EnablePatrolRead = 0;
EnableSmartMode = 0;
DlyBtwnIterations = 336;
SmartScanInterval = 0;

```

```

EndControllerParameter
End

```

Mylex eXtremeRAID 2000 Controller 5

```

GCFVERSION=2.00;
Begin
    BeginGroup
        PhysicalDevice0 = Channel=0, Target=0, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice1 = Channel=0, Target=1, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice2 = Channel=0, Target=2, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice3 = Channel=0, Target=3, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice4 = Channel=0, Target=4, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice5 = Channel=0, Target=5, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice6 = Channel=0, Target=6, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;
        PhysicalDevice7 = Channel=0, Target=8, Size=17340MB,
State=Online,
            TransferSpeed=80MHz, TransferWidth=16Bit,
MaxTag=16;

```



```

IntermediateDevice0 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=242704MB,
    (PhysicalDevice0, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice1, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice2, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice3, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice4, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice5, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice6, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice7, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice8, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice9, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice10, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice11, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice12, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice13, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice1 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=242704MB,
    (PhysicalDevice14, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice15, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice16, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice17, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice18, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice19, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice20, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice21, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice22, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice23, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice24, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice25, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice26, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice27, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
IntermediateDevice2 = StripeSize=64KB, Raid=0, WriteThrough=1,
Size=242704MB,
    (PhysicalDevice28, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice29, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice30, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice31, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice32, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice33, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice34, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice35, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice36, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice37, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice38, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice39, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice40, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks),
    (PhysicalDevice41, StartAddress=0MB/0Blocks,
Size=17336MB/35504128Blocks);
LogicalDevice0 = StripeSize=64KB, Raid=12, WriteThrough=1,
Size=728112MB, BIOSGeometry=8GB,
    (IntermediateDevice0, StartAddress=0MB,
Size=242704MB),
    (IntermediateDevice1, StartAddress=0MB,
Size=242704MB),
    (IntermediateDevice2, StartAddress=0MB,
Size=242704MB);
EndGroup
BeginControllerParameter
    ControllerName = eXtremeRAID 2000;
    ControllerType = 28;
    FirmwareVersion = 7.01;
    CacheLineSize = 8KB;
    AutomaticRebuildRate = 50;
    BackgroundInitializeRate = 50;
    ConsistencyCheckRate = 50;
    MORERate = 50;
    InitiatorID = 7;
    DevicesPerSpin = 2;
    SequentialDelay = 6S;
    EnableDriveSizing = 0;
    EnableClustering = 0;
    EnableBGInit = 1;
    EnableBiosLoadDelay = 0;
    EnableForcedUnitAccess = 0;
    DisableBios = 0;
    EnableCDROMboot = 0;
    EnableStorageWorks = 0;
    EnableSAFTE = 0;
    EnableSES = 0;
    EnableARM = 1;
    EnableOFM = 1;
    OEMCode = 0;
    StartupOption = 0;
    EnableTempOffline = 0;
    EnablePatrolRead = 0;
    EnableSmartMode = 0;
    DlyBtnIterations = 0;
    SmartScanInterval = 0;
EndControllerParameter
End

```

Microsoft Windows 2000 Server

System Information Report for Client 1

The configuration of the second client was the same as Client 1.

Information report written at: 02/24/2003 07:45:31 AM
[System Information]

[Following are sub-categories of this main category]

[System Summary]

Item	Value
OS Name	Microsoft Windows 2000 Server
Version	5.0.2195 Service Pack 2 Build 2195
OS Manufacturer	Microsoft Corporation
System Name	CLIENT10
System Manufacturer	IBM
System Model	[-[8647xxx]-]
System Type	X86-based PC
Processor	x86 Family 15 Model 2 Stepping 7 GenuineIntel ~37419 Mhz
Processor	x86 Family 15 Model 2 Stepping 7 GenuineIntel ~37419 Mhz
BIOS Version)Phoenix - Award WorkstationBIOS v6.00PG
Windows Directory	C:\WINNT
System Directory	C:\WINNT\System32
Boot Device	\Device\Harddisk0\Partition1
Locale	United States
User Name	CLIENT10\Administrator
Time Zone	Eastern Standard Time
Total Physical Memory	1,048,044 KB
Available Physical Memory	876,024 KB
Total Virtual Memory	4,092,700 KB
Available Virtual Memory	3,847,796 KB
Page File Space	3,044,656 KB
Page File	C:\pagefile.sys

[Hardware Resources]

[Following are sub-categories of this main category]

[Conflicts/Sharing]

Resource	Device
No conflicted/shared resources	

[DMA]

Channel	Device	Status
4	Direct memory access controller	OK
2	Standard floppy disk controller	OK

[Forced Hardware]

Device	PNP Device ID
No Forced Hardware	

[I/O]

Address Range	Device	Status
0x0000-0x0CF7	PCI bus	OK
0x0000-0x0CF7	Direct memory access controller	OK
0x0D00-0x40B7	PCI bus	OK
0x40B9-0xFFFF	PCI bus	OK
0x9000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0x9000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0x9000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0x9000-0xBFFF	Intel(R) PRO/100 S Dual Port Server Adapter #5	OK

System

0xB000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0xB000-0xBFFF	PCI standard PCI-to-PCI bridge	OK
0xB000-0xBFFF	Intel(R) PRO/100 S Dual Port Server Adapter #3	OK
0xB400-0xB43F	Intel(R) PRO/100 S Dual Port Server Adapter #4	OK
0x9400-0x943F	Intel(R) PRO/100 S Dual Port Server Adapter #6	OK
0xA000-0xA0FF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xA400-0xA4FF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xC000-0xC0FF	ATI Technologies Inc. RAGE XL PCI	OK
0x03B0-0x03BB	ATI Technologies Inc. RAGE XL PCI	OK
0x03C0-0x03DF	ATI Technologies Inc. RAGE XL PCI	OK
0x0A79-0x0A79	ISAPNP Read Data Port	OK
0x0279-0x0279	ISAPNP Read Data Port	OK
0x0274-0x0277	ISAPNP Read Data Port	OK
0xF000-0xF00F	Standard Dual Channel PCI IDE Controller	OK
0x01F0-0x01F7	Primary IDE Channel	OK
0x03F6-0x03F6	Primary IDE Channel	OK
0x0170-0x0177	Secondary IDE Channel	OK
0x0376-0x0376	Secondary IDE Channel	OK
0x5000-0x501F	PCI Device	OK
0x4000-0x40BF	Motherboard resources	OK
0x0010-0x001F	Motherboard resources	OK
0x0022-0x003F	Motherboard resources	OK
0x0044-0x005F	Motherboard resources	OK
0x0062-0x0063	Motherboard resources	OK
0x0065-0x006F	Motherboard resources	OK
0x0074-0x007F	Motherboard resources	OK
0x0091-0x0093	Motherboard resources	OK
0x00A2-0x00BF	Motherboard resources	OK
0x00E0-0x00EF	Motherboard resources	OK
0x04D0-0x04D1	Motherboard resources	OK
0x0800-0x087F	Motherboard resources	OK
0x0020-0x0021	Programmable interrupt controller	OK
0x00A0-0x00A1	Programmable interrupt controller	OK
0x0080-0x0090	Direct memory access controller	OK
0x0094-0x009F	Direct memory access controller	OK
0x00C0-0x00DF	Direct memory access controller	OK
0x0040-0x0043	System timer	OK
0x0070-0x0073	System CMOS/real time clock	OK
0x0061-0x0061	System speaker	OK
0x00F0-0x00FF	Numeric data processor	OK
0x03F2-0x03F5	Standard floppy disk controller	OK
0x03F7-0x03F7	Standard floppy disk controller	OK
0x03F8-0x03FF	Communications Port (COM1)	OK
0x02F8-0x02FF	Communications Port (COM2)	OK
0x0378-0x037F	Printer Port (LPT1)	OK
0x0060-0x0060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x0064-0x0064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
0x40B8-0x40B8	Not Available	OK

[IRQs]

IRQ Number	Device
9	Microsoft ACPI-Compliant System
48	Broadcom NetXtreme Gigabit Ethernet
52	Intel(R) PRO/100 S Dual Port Server Adapter #3
53	Intel(R) PRO/100 S Dual Port Server Adapter #4
28	Intel(R) PRO/100 S Dual Port Server Adapter #5
29	Intel(R) PRO/100 S Dual Port Server Adapter #6
32	LSI Logic 1020/1030 Ultra320 SCSI Adapter
33	LSI Logic 1020/1030 Ultra320 SCSI Adapter
22	ATI Technologies Inc. RAGE XL PCI

14 Primary IDE Channel
 10 PCI Device
 8 System CMOS/real time clock
 13 Numeric data processor
 6 Standard floppy disk controller
 4 Communications Port (COM1)
 3 Communications Port (COM2)
 12 PS/2 Compatible Mouse
 1 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard

[Memory]

Range	Device	Status
0xC8000-0xCBFFF	System board	OK
0xF0000-0xF7FFF	System board	OK
0xF8000-0xFBFFF	System board	OK
0xFC000-0xFFFFF	System board	OK
0x3FFF0000-0x3FFFFFFF	System board	OK
0x0000-0x9FFFF	System board	OK
0x10000-0x3FEFFFF	System board	OK
0xFEC00000-0xFECFFFFF	System board	OK
0xFEE00000-0xFEEFFFFF	System board	OK
0xFFB00000-0xFFB7FFFF	System board	OK
0xFFFF00000-0xFFFFFFF	System board	OK
0xE0000-0xEFFFF	System board	OK
0xFFB80000-0xFFBFFFFF	Intel(r) 82802 Firmware Hub Device	OK
0xA0000-0xBFFFF	PCI bus	OK
0xA0000-0xBFFFF	ATI Technologies Inc. RAGE XL PCI	OK
0xC0000-0xDFFFF	PCI bus	OK
0x40000000-0xFEBFFFFF	PCI bus	OK
0xEC000000-0xEFFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF0000000-0xF2FFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF0000000-0xF2FFFFFFF	PCI standard PCI-to-PCI bridge	OK
0xF2201000-0xF2201FFF	System Interrupt Controller	OK
0xF2000000-0xF21FFFFF	PCI standard PCI-to-PCI bridge	OK
0xF2000000-0xF21FFFFF	PCI standard PCI-to-PCI bridge	OK
0xF2000000-0xF21FFFFF	Intel(R) PRO/100 S Dual Port Server Adapter	OK
0xF2100000-0xF210FFFF	Broadcom NetXtreme Gigabit Ethernet	OK
0xF2041000-0xF2041FFF	Intel(R) PRO/100 S Dual Port Server Adapter	OK
0xF2040000-0xF2040FFF	Intel(R) PRO/100 S Dual Port Server Adapter	OK
0xF2020000-0xF203FFFF	Intel(R) PRO/100 S Dual Port Server Adapter	OK
0xF2200000-0xF2200FFF	System Interrupt Controller	OK
0xF1000000-0xF10FFFFF	PCI standard PCI-to-PCI bridge	OK
0xF1000000-0xF10FFFFF	Intel(R) PRO/100 S Dual Port Server Adapter	OK
0xF1041000-0xF1041FFF	Intel(R) PRO/100 S Dual Port Server Adapter	OK
0xF1040000-0xF1040FFF	Intel(R) PRO/100 S Dual Port Server Adapter	OK
0xF1020000-0xF103FFFF	Intel(R) PRO/100 S Dual Port Server Adapter	OK
0xF1110000-0xF111FFFF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xF1100000-0xF110FFFF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xF1120000-0xF112FFFF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xF1130000-0xF113FFFF	LSI Logic 1020/1030 Ultra320 SCSI Adapter	OK
0xF3000000-0xF3FFFFFFF	ATI Technologies Inc. RAGE XL PCI	OK

0xF5000000-0xF5000FFF ATI Technologies Inc. RAGE XL PCI
 OK
 0xFEBFFC00-0xFEBFFFFF Standard Dual Channel PCI IDE Controller
 OK

[Components]

[Following are sub-categories of this main category]

[Multimedia]

[Following are sub-categories of this main category]

[Audio Codecs]

Codec	Manufacturer	Description	Status	File
Version	Size	Creation Date		
OK	C:\WINNT\System32\LHACM.ACM	Microsoft Corporation 4.4.3385	33.27 KB	
	(34,064 bytes)	2/10/2003 5:01:32 PM		
OK	C:\WINNT\System32\IAC25_32.AX	Intel Corporation Indeo® audio software	2.05.53	195.00 KB
	(199,680 bytes)	12/7/1999 7:00:00 AM		
OK	C:\WINNT\System32\MSG723.ACM	Microsoft Corporation 4.4.3385	106.77 KB	
	(109,328 bytes)	2/10/2003 5:01:31 PM		
OK	C:\WINNT\System32\MSGSM32.ACM	Microsoft Corporation 5.00.2134.1		
	22.27 KB (22,800 bytes)	12/7/1999 7:00:00 AM		
OK	C:\WINNT\System32\TSOFT32.ACM	DSP GROUP, INC. 1.01	9.27 KB (9,488 bytes)	OK
	12/7/1999 7:00:00 AM			
OK	C:\WINNT\System32\MSADP32.ACM	Microsoft Corporation 5.00.2134.1		
	14.77 KB (15,120 bytes)	12/7/1999 7:00:00 AM		
OK	C:\WINNT\System32\IMAADP32.ACM	Microsoft Corporation 5.00.2134.1		
	16.27 KB (16,656 bytes)	12/7/1999 7:00:00 AM		
OK	C:\WINNT\System32\MSG711.ACM	Microsoft Corporation 5.00.2134.1		
	10.27 KB (10,512 bytes)	12/7/1999 7:00:00 AM		

[Video Codecs]

Codec	Manufacturer	Description	Status	File
Version	Size	Creation Date		
OK	C:\WINNT\System32\IR50_32.DLL	Intel Corporation Indeo® video 5.10	R.5.10.15.2.55	
	737.50 KB (755,200 bytes)	12/7/1999 7:00:00 AM		
OK	C:\WINNT\System32\MSH261.DRV	Microsoft Corporation 4.4.3385	163.77 KB	
	(167,696 bytes)	2/10/2003 5:01:31 PM		
OK	C:\WINNT\System32\MSH263.DRV	Microsoft Corporation 4.4.3385	252.27 KB	
	(258,320 bytes)	2/10/2003 5:01:10 PM		
OK	C:\WINNT\System32\MSVIDC32.DLL	Microsoft Corporation 5.00.2134.1		
	27.27 KB (27,920 bytes)	12/7/1999 7:00:00 AM		
OK	C:\WINNT\System32\ICCVID.DLL	Radius Inc. 1.10.0.6	108.00 KB (110,592 bytes)	OK
	12/7/1999 7:00:00 AM			
OK	C:\WINNT\System32\MSRLE32.DLL	Microsoft Corporation 5.00.2134.1		
	10.77 KB (11,024 bytes)	12/7/1999 7:00:00 AM		
OK	C:\WINNT\System32\IR32_32.DLL	Intel(R) Corporation Not Available	194.50 KB	OK
	(199,168 bytes)	12/7/1999 7:00:00 AM		

[CD-ROM]

Item	Value
Drive	D:
Description	CD-ROM Drive
Media Loaded	False
Media Type	CD-ROM
Name	HL-DT-ST CD-ROM GCR-8480B
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	
IDE\CDROMHL-DT-ST_CD-ROM_GCR-8480B_____1.02____\5&74A80B&0&0.0.0	

[Sound Device]

Item	Value
No sound devices	

[Display]

Item	Value
Name	ATI Technologies Inc. RAGE XL PCI
PNP Device ID	
PCI\VEN_1002&DEV_4752&SUBSYS_02401014&REV_27\4&1A671D0C&0&08F0	
Adapter Type	ATI RAGE XL PCI, ATI Technologies Inc. compatible
Adapter Description	ATI Technologies Inc. RAGE XL PCI
Adapter RAM	8.00 MB (8,388,608 bytes)
Installed Drivers	atidrab.dll
Driver Version	5.00.2179.1
INF File	display.inf (atirage3 section)
Color Planes	1
Color Table Entries	65536
Resolution	1024 x 768 x 60 hertz
Bits/Pixel	16

[Infrared]

Item	Value
No infrared devices	

[Input]

[Following are sub-categories of this main category]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\3&13C0B0C5&0
NumberOfFunctionKeys	12

[Pointing Device]

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	3
Status	OK
PNP Device ID	ACPI\PNP0F13\3&13C0B0C5&0

Power Management Supported	False
Double Click Threshold	6
Handedness	Right Handed Operation

[Modem]

Item	Value
No modems	

[Network]

[Following are sub-categories of this main category]

[Adapter]

Item	Value
Name	[00000000] RAS Async Adapter
Adapter Type	Not Available
Product Name	RAS Async Adapter
Installed	True
PNP Device ID	Not Available
Last Reset	2/23/2003 11:23:14 AM
Index	0
Service Name	AsyncMac
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Service Name	Not Available

Name	[00000001] WAN Miniport (L2TP)
Adapter Type	Not Available
Product Name	WAN Miniport (L2TP)
Installed	True
PNP Device ID	ROOT\MS_L2TPMINIPOINT\0000
Last Reset	2/23/2003 11:23:14 AM
Index	1
Service Name	Rasl2tp
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Service Name	Rasl2tp
Driver	c:\winnt\system32\drivers\rasl2tp.sys (50800, 5.00.2179.1)

Name	[00000002] WAN Miniport (PPTP)
Adapter Type	Wide Area Network (WAN)
Product Name	WAN Miniport (PPTP)
Installed	True
PNP Device ID	ROOT\MS_PPTPMINIPOINT\0000
Last Reset	2/23/2003 11:23:14 AM
Index	2
Service Name	PptpMiniport
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available

DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30
Service Name PptpMiniport
Driver c:\winnt\system32\drivers\raspttp.sys (47856, 5.00.2160.1)

Name [00000003] Direct Parallel
Adapter Type Not Available
Product Name Direct Parallel
Installed True
PNP Device ID ROOT\MS_PTMINIPOINT\0000
Last Reset 2/23/2003 11:23:14 AM
Index 3
Service Name Raspti
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Service Name Raspti
Driver c:\winnt\system32\drivers\raspti.sys (16880, 5.00.2146.1)

Name [00000004] WAN Miniport (IP)
Adapter Type Not Available
Product Name WAN Miniport (IP)
Installed True
PNP Device ID ROOT\MS_NDISWANIP\0000
Last Reset 2/23/2003 11:23:14 AM
Index 4
Service Name NdisWan
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Service Name NdisWan
Driver c:\winnt\system32\drivers\ndiswan.sys (90096, 5.00.2195.2779)

Name [00000005] Broadcom NetXtreme Gigabit Ethernet
Adapter Type Ethernet 802.3
Product Name Broadcom NetXtreme Gigabit Ethernet
Installed True
PNP Device ID PCI\VEN_14E4&DEV_16A7&SUBSYS_026F1014&REV_02\5&121CC7C2&0&08E810
Last Reset 2/23/2003 11:23:14 AM
Index 5
Service Name b57w2k
IP Address 192.168.132.251
IP Subnet 255.255.255.0
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:10:DC:76:E2:B3
Service Name b57w2k
IRQ Number 48
Driver c:\winnt\system32\drivers\b57w2k.sys (78352, 2.78.0.0)

Name [00000008] Intel(R) PRO/100 S Dual Port Server Adapter
Adapter Type Ethernet 802.3
Product Name Intel(R) PRO/100 S Dual Port Server Adapter

Installed True
PNP Device ID PCI\VEN_8086&DEV_1229&SUBSYS_10158086&REV_0D\6&27CA6BFE&0&2010E810
Last Reset 2/23/2003 11:23:14 AM
Index 8
Service Name E100B
IP Address 192.168.120.10
IP Subnet 255.255.255.0
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:02:B3:A8:B1:DB
Service Name E100B
IRQ Number 52
I/O Port 0xB000-0xBFFF
Driver c:\winnt\system32\drivers\e100bnt5.sys (141584, 6.04.14.0000)

Name [00000009] Intel(R) PRO/100 S Dual Port Server Adapter
Adapter Type Ethernet 802.3
Product Name Intel(R) PRO/100 S Dual Port Server Adapter
Installed True
PNP Device ID PCI\VEN_8086&DEV_1229&SUBSYS_10158086&REV_0D\6&27CA6BFE&0&2810E810
Last Reset 2/23/2003 11:23:14 AM
Index 9
Service Name E100B
IP Address 192.168.110.10
IP Subnet 255.255.255.0
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:02:B3:A8:B1:DC
Service Name E100B
IRQ Number 53
I/O Port 0xB400-0xB43F
Driver c:\winnt\system32\drivers\e100bnt5.sys (141584, 6.04.14.0000)

Name [00000010] Intel(R) PRO/100 S Dual Port Server Adapter
Adapter Type Ethernet 802.3
Product Name Intel(R) PRO/100 S Dual Port Server Adapter
Installed True
PNP Device ID PCI\VEN_8086&DEV_1229&SUBSYS_10158086&REV_0D\6&34E7E7F4&0&2010F810
Last Reset 2/23/2003 11:23:14 AM
Index 10
Service Name E100B
IP Address 192.168.140.10
IP Subnet 255.255.255.0
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:02:B3:B8:F9:AD
Service Name E100B
IRQ Number 28
I/O Port 0x9000-0xBFFF
Driver c:\winnt\system32\drivers\e100bnt5.sys (141584, 6.04.14.0000)

Name [00000011] Intel(R) PRO/100 S Dual Port Server Adapter
Adapter Type Ethernet 802.3

Product Name Intel(R) PRO/100 S Dual Port Server Adapter
 Installed True
 PNP Device ID
 PCI\VEN_8086&DEV_1229&SUBSYS_10158086&REV_0D\6&34E7E7F4&0&2810F810
 Last Reset 2/23/2003 11:23:14 AM
 Index 11
 Service Name E100B
 IP Address 192.168.130.10
 IP Subnet 255.255.255.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:02:B3:B8:F9:AE
 Service Name E100B
 IRQ Number 29
 I/O Port 0x9400-0x943F
 Driver c:\winnt\system32\drivers\le100bnt5.sys (141584, 6.04.14.0000)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	16 bytes
MaximumMessageSize	0 bytes
MessageOriented	False
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	True
SupportsGracefulClosing	True
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFD Tcpip [UDP/IP]
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	16 bytes
MaximumMessageSize	65467 bytes
MessageOriented	True
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	True
Name	RSVP UDP Service Provider
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	16 bytes
MaximumMessageSize	65467 bytes
MessageOriented	True

MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	True
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	True

Name	RSVP TCP Service Provider
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	16 bytes
MaximumMessageSize	0 bytes
MessageOriented	False
MinimumAddressSize	16 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	True
SupportsExpeditedData	True
SupportsGracefulClosing	True
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{46C9A0D6-E62D-4DBF-958D-3332D7E2724D}]	
SEQPACKET	0
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{46C9A0D6-E62D-4DBF-958D-3332D7E2724D}]	
DATAGRAM	0
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{CCEF995F-88D1-4909-B081-227DA339588C}]
 SEQPACKET 8
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{CCEF995F-88D1-4909-B081-227DA339588C}]
 DATAGRAM 8
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{429A8AF4-651D-45B3-BB0C-2B8ADDFB0687}]
 SEQPACKET 7
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{429A8AF4-651D-45B3-BB0C-2B8ADDFB0687}]
 DATAGRAM 7
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes

MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{0AE55295-FD97-4F03-8CE0-2962253F5166}]
 SEQPACKET 6
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{0AE55295-FD97-4F03-8CE0-2962253F5166}]
 DATAGRAM 6
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{863ED3FC-3C10-4E07-A1A7-C4300734A1C1}]
 SEQPACKET 5
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False

SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{863ED3FC-3C10-4E07-A1A7-C4300734A1C1}]
 DATAGRAM 5

ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{BAD679FF-C376-4B6F-ABCE-3FA6DEA10679}]
 SEQPACKET 1

ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{BAD679FF-C376-4B6F-ABCE-3FA6DEA10679}]
 DATAGRAM 1

ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{746F2941-9397-47E7-8C77-C78A77DFC894}]
 SEQPACKET 2

ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{746F2941-9397-47E7-8C77-C78A77DFC894}]
 DATAGRAM 2

ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

[WinSock]

Item	Value
File	c:\winnt\system32\winsock.dll
Version	3.10
Size	2.80 KB (2,864 bytes)

File	c:\winnt\system32\wssock32.dll
Version	5.00.2195.2871
Size	21.27 KB (21,776 bytes)

[Ports]

[Following are sub-categories of this main category]

[Serial]

Item	Value
Name	COM1
Status	OK
PNP Device ID	ACPI\PNP0501\1
Maximum Input Buffer Size	0
Maximum Output Buffer Size	False
Settable Baud Rate	True
Settable Data Bits	True
Settable Flow Control	True
Settable Parity	True
Settable Parity Check	True
Settable Stop Bits	True

Settable RLSD True
 Supports RLSD True
 Supports 16 Bit Mode False
 Supports Special Characters False
 Baud Rate 9600
 Bits/Byte 8
 Stop Bits 1
 Parity None
 Busy 0
 Abort Read/Write on Error 0
 Binary Mode Enabled -1
 Continue XMit on XOff 0
 CTS Outflow Control 0
 Discard NULL Bytes 0
 DSR Outflow Control 0
 DSR Sensitivity 0
 DTR Flow Control Type Enable
 EOF Character 0
 Error Replace Character 0
 Error Replacement Enabled 0
 Event Character 0
 Parity Check Enabled 0
 RTS Flow Control Type Enable
 XOff Character 19
 XOffXMit Threshold 512
 XOn Character 17
 XOnXMit Threshold 2048
 XOnXOff InFlow Control 0
 XOnXOff OutFlow Control 0
 IRQ Number 4
 I/O Port 0x03F8-0x03FF
 Driver c:\winnt\system32\drivers\serial.sys (62416, 5.00.2195.2780)

Name COM2
 Status OK
 PNP Device ID ACPI\PNP0501\2
 Maximum Input Buffer Size 0
 Maximum Output Buffer Size False
 Settable Baud Rate True
 Settable Data Bits True
 Settable Flow Control True
 Settable Parity True
 Settable Parity Check True
 Settable Stop Bits True
 Settable RLSD True
 Supports RLSD True
 Supports 16 Bit Mode False
 Supports Special Characters False
 Baud Rate 9600
 Bits/Byte 8
 Stop Bits 1
 Parity None
 Busy 0
 Abort Read/Write on Error 0
 Binary Mode Enabled -1
 Continue XMit on XOff 0
 CTS Outflow Control 0
 Discard NULL Bytes 0
 DSR Outflow Control 0
 DSR Sensitivity 0
 DTR Flow Control Type Enable
 EOF Character 0
 Error Replace Character 0
 Error Replacement Enabled 0
 Event Character 0
 Parity Check Enabled 0
 RTS Flow Control Type Enable
 XOff Character 19

XOffXMit Threshold 512
 XOn Character 17
 XOnXMit Threshold 2048
 XOnXOff InFlow Control 0
 XOnXOff OutFlow Control 0
 IRQ Number 3
 I/O Port 0x02F8-0x02FF
 Driver c:\winnt\system32\drivers\serial.sys (62416, 5.00.2195.2780)

[Parallel]

Item Value
 Name LPT1
 PNP Device ID ACPI\PNP0400\3&13C0B0C5&0

[Storage]

[Following are sub-categories of this main category]

[Drives]

Item Value
 Drive A:
 Description 3 1/2 Inch Floppy Drive
 Drive C:
 Description Local Fixed Disk
 Compressed False
 File System NTFS
 Size 16.94 GB (18,194,284,544 bytes)
 Free Space 13.91 GB (14,940,585,984 bytes)
 Volume Name
 Volume Serial Number 08674715
 Partition Disk #0, Partition #0
 Partition Size 16.94 GB (18,194,287,104 bytes)
 Starting Offset 32256 bytes
 Drive Description Disk drive
 Drive Manufacturer (Standard disk drives)
 Drive Model IBM-PSG ST318203LC !# SCSI Disk Device
 Drive BytesPerSector 512
 Drive MediaLoaded True
 Drive MediaType Fixed hard disk media
 Drive Partitions 1
 Drive SCSI Bus 0
 Drive SCSI Logical Unit 0
 Drive SCSI Port 2
 Drive SCSI Target Id 5
 Drive SectorsPerTrack 63
 Drive Size 18194319360 bytes
 Drive TotalCylinders 2212
 Drive TotalSectors 35535780
 Drive TotalTracks 564060
 Drive TracksPerCylinder 255

Drive E:
 Description Network Connection
 Provider Name \\192.168.132.253\e\$

[SCSI]

Item Value
 Name LSI Logic 1020/1030 Ultra320 SCSI Adapter
 Caption LSI Logic 1020/1030 Ultra320 SCSI Adapter
 Driver SYMMPI
 Status OK

PNP Device ID
 PCI\VEN_1000&DEV_0030&SUBSYS_10001014&REV_07\5&21593F33&0
 &18F810
 Device ID
 PCI\VEN_1000&DEV_0030&SUBSYS_10001014&REV_07\5&21593F33&0
 &18F810
 Device Map Not Available
 Index Not Available
 Max Number Controlled Not Available
 IRQ Number 32
 I/O Port 0xA000-0xA0FF
 Driver c:\winnt\system32\drivers\symmpi.sys (38512, 1.08.22.00)

Name LSI Logic 1020/1030 Ultra320 SCSI Adapter
 Caption LSI Logic 1020/1030 Ultra320 SCSI Adapter
 Driver SYMMPI
 Status OK
 PNP Device ID
 PCI\VEN_1000&DEV_0030&SUBSYS_10001014&REV_07\5&21593F33&0
 &19F810
 Device ID
 PCI\VEN_1000&DEV_0030&SUBSYS_10001014&REV_07\5&21593F33&0
 &19F810
 Device Map Not Available
 Index Not Available
 Max Number Controlled Not Available
 IRQ Number 33
 I/O Port 0xA400-0xA4FF
 Driver c:\winnt\system32\drivers\symmpi.sys (38512, 1.08.22.00)

[Printing]

Name Port Name Server Name
 No printing information

[Problem Devices]

Device	PNP Device ID	Error Code
PCI Device		
PCI\VEN_8086&DEV_2551&SUBSYS_25511014&REV_03\3&13C0B0C5&0&01	28	
System Interrupt Controller		
PCI\VEN_8086&DEV_1461&SUBSYS_00000000&REV_03\4&4E4AD31&0&E010	28	
System Interrupt Controller		
PCI\VEN_8086&DEV_1461&SUBSYS_00000000&REV_03\4&4E4AD31&0&F010	28	
PCI Device		
PCI\VEN_8086&DEV_2554&SUBSYS_25541014&REV_03\3&13C0B0C5&0&11	28	
PCI Device		
PCI\VEN_8086&DEV_24C3&SUBSYS_027A1014&REV_02\3&13C0B0C5&0&FB	28	
Not Available	ACPI\IBM37D6\2&DABA3FF&0	28
Not Available	ACPI\ASF0001\2&DABA3FF&0	28

[USB]

Device PNP Device ID
 No USB Devices

[Software Environment]

[Following are sub-categories of this main category]

[Drivers]

Name	Description	File	Type	Started	Start Mode
abiosdsk	Abiosdsk	Not Available	Kernel Driver	Accept Pause	Accept Stop
Disabled	Stopped	OK	Ignore	False	False
abp480n5	abp480n5	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
acpi	Microsoft ACPI Driver		c:\winnt\system32\drivers\acpi.sys	Running	OK
Kernel Driver	True	Boot			Normal
False	True				
acpiec	ACPIEC	c:\winnt\system32\drivers\acpiec.sys	Kernel		Kernel
Driver	False	Disabled	Stopped	OK	Normal
False					
adpu160m	adpu160m	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
afd	AFD Networking Support Environment				
c:\winnt\system32\drivers\afd.sys	Kernel Driver			True	Auto
Running	OK	Normal	False	True	
aha154x	Aha154x	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
aic116x	aic116x	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
aic78u2	aic78u2	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
aic78xx	aic78xx	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
ami0nt	ami0nt	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
amsint	amsint	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
asc	asc	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
asc3350p	asc3350p	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
asc3550	asc3550	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
asynmac	RAS Asynchronous Media Driver				
c:\winnt\system32\drivers\asynmac.sys	Kernel Driver				False
Manual	Stopped	OK	Normal	False	False
atapi	Standard IDE/ESDI Hard Disk Controller				
c:\winnt\system32\drivers\atapi.sys	Kernel Driver				True
Boot	Running	OK	Normal	False	True
atdisk	Atdisk	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Ignore	False	False
atirage3	atirage3	c:\winnt\system32\drivers\atimpab.sys	Kernel		Kernel
Driver	True	Manual	Running	OK	Ignore
True					
atmarpc	ATM ARP Client Protocol				
c:\winnt\system32\drivers\atmarpc.sys	Kernel Driver				False
Manual	Stopped	OK	Normal	False	False
audstub	Audio Stub Driver	c:\winnt\system32\drivers\audstub.sys	Kernel		Kernel
Kernel Driver	True	Manual	Running	OK	Normal
False	True				
b57w2k	Broadcom NetXtreme Gigabit Ethernet				
c:\winnt\system32\drivers\b57w2k.sys	Kernel Driver				True
Manual	Running	OK	Normal	False	True
beep	Beep	c:\winnt\system32\drivers\beep.sys	Kernel		Kernel
Driver	True	System	Running	OK	Normal
True					
buslogic	BusLogic	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
cd20xrnt	cd20xrnt	Not Available	Kernel Driver		False
Disabled	Stopped	OK	Normal	False	False
cdaudio	Cdaudio	c:\winnt\system32\drivers\cdaudio.sys	Kernel		Kernel
Driver	False	System	Stopped	OK	Ignore
False					
cdfs	Cdfs	c:\winnt\system32\drivers\cdfs.sys	File System		File System
Driver	True	Disabled	Running	OK	Normal
True					

cdrom	CD-ROM Driver	c:\winnt\system32\drivers\cdrom.sys							intelide	IntelIde	Not Available	Kernel Driver	False	
Kernel Driver	True	System	Running	OK	Normal				Disabled	Stopped	OK	Normal	False	
False	True								ipfilterdriver	IP Traffic Filter Driver			False	
changer	Changer	Not Available				Kernel Driver	False		c:\winnt\system32\drivers\ipfltldr.sys			Kernel Driver	False	
System	Stopped	OK	Ignore	False	False				Manual	Stopped	OK	Normal	False	
cpqarray	Cpqarray	Not Available				Kernel Driver	False		ipinip	IP in IP Tunnel Driver	c:\winnt\system32\drivers\ipinip.sys		False	
Disabled	Stopped	OK	Normal	False	False				Kernel Driver	False	Manual	Stopped	OK	
cpqarray2	cpqarray2	Not Available				Kernel Driver	False		False	False			Normal	
Disabled	Stopped	OK	Normal	False	False				ipnat	IP Network Address Translator	c:\winnt\system32\drivers\ipnat.sys		False	
cpqfcalm	cpqfcalm	Not Available				Kernel Driver	False		Kernel Driver	False	Manual	Stopped	OK	
Disabled	Stopped	OK	Normal	False	False				False	False			Normal	
cpqfws2e	cpqfws2e	Not Available				Kernel Driver	False		ipsec	IPSEC driver	c:\winnt\system32\drivers\ipsec.sys		False	
Disabled	Stopped	OK	Normal	False	False				Kernel Driver	True	Manual	Running	OK	
dac960nt	dac960nt	Not Available				Kernel Driver	False		False	True			Normal	
Disabled	Stopped	OK	Normal	False	False				ipsraidn	ipsraidn	Not Available	Kernel Driver	False	
deckzpsx	deckzpsx	Not Available				Kernel Driver	False		Disabled	Stopped	OK	Normal	False	
Disabled	Stopped	OK	Normal	False	False				isapnp	PnP ISA/EISA Bus Driver			False	
dfsdriver	DfsDriver	c:\winnt\system32\drivers\dfs.sys	File System Driver						c:\winnt\system32\drivers\isapnp.sys			Kernel Driver	True	
True	Boot	Running	OK	Normal	False	True			Boot	Running	OK	Critical	False	
disk	Disk Driver	c:\winnt\system32\drivers\disk.sys							Keyboard Class Driver				True	
Kernel Driver	True	Boot	Running	OK	Normal				c:\winnt\system32\drivers\kbdclass.sys			Kernel Driver	True	
False	True								System	Running	OK	Normal	False	
diskperf	Diskperf	c:\winnt\system32\drivers\diskperf.sys				Kernel			ksecdd	KSecDD	c:\winnt\system32\drivers\ksecdd.sys		True	
Driver	True	Boot	Running	OK	Normal	False			Driver	True	Boot	Running	OK	
True									True				Normal	
dmboot	dmboot	c:\winnt\system32\drivers\dmboot.sys				Kernel			lbrtfdc	lbrtfdc	Not Available	Kernel Driver	False	
Driver	False	Disabled	Stopped	OK	Normal	False			System	Stopped	OK	Ignore	False	
False									lp6nds35	lp6nds35	Not Available	Kernel Driver	False	
dmio	Logical Disk Manager Driver								Disabled	Stopped	OK	Normal	False	
c:\winnt\system32\drivers\dmio.sys						Kernel Driver	True		mnmd	mnmd	c:\winnt\system32\drivers\mnmd.sys		False	
Boot	Running	OK	Normal	False	True				Driver	True	System	Running	OK	
dmload	dmload	c:\winnt\system32\drivers\dmload.sys				Kernel			True			Ignore	False	
Driver	True	Boot	Running	OK	Normal	False			modem	Modem	c:\winnt\system32\drivers\modem.sys		Kernel	
True									Driver	False	Manual	Stopped	OK	
e100b	Intel(R) PRO Adapter Driver								False			Ignore	False	
c:\winnt\system32\drivers\e100bnt5.sys						Kernel Driver	True		mouclass	Mouse Class Driver	c:\winnt\system32\drivers\mouclass.sys		Kernel	
Manual	Running	OK	Normal	False	True				Kernel Driver	True	System	Running	OK	
efs	EFS	c:\winnt\system32\drivers\efs.sys	File System Driver						False	True			Normal	
True	Disabled	Running	OK	Normal	False	True			mountmgr	MountMgr	c:\winnt\system32\drivers\mountmgr.sys		Kernel	
fastfat	Fastfat	c:\winnt\system32\drivers\fastfat.sys	File System						Driver	True	Boot	Running	OK	
Driver	True	Disabled	Running	OK	Normal	False			True				Normal	
True									mraid35x	mraid35x	Not Available	Kernel Driver	False	
fd16_700	Fd16_700	Not Available				Kernel Driver	False		Disabled	Stopped	OK	Normal	False	
Disabled	Stopped	OK	Normal	False	False				mrxsmb	MRXSMB	c:\winnt\system32\drivers\mrxsmb.sys		File System	
fdc	Floppy Disk Controller Driver	c:\winnt\system32\drivers\fdc.sys							Driver	True	System	Running	OK	
Kernel Driver	True	Manual	Running	OK	Normal				True				Normal	
False	True								msfs	Msfs	c:\winnt\system32\drivers\msfs.sys		File System	
fips	Fips	c:\winnt\system32\drivers\fips.sys				Kernel			Driver	True	System	Running	OK	
Driver	True	Auto	Running	OK	Normal	False			True				Normal	
True									mksrv	Microsoft Streaming Service Proxy	c:\winnt\system32\drivers\mksrv.sys		Kernel Driver	
fireport	fireport	Not Available				Kernel Driver	False		c:\winnt\system32\drivers\mksrv.sys			Kernel Driver	False	
Disabled	Stopped	OK	Normal	False	False				Manual	Stopped	OK	Normal	False	
flashpnt	flashpnt	Not Available				Kernel Driver	False		mspclock	Microsoft Streaming Clock Proxy			False	
Disabled	Stopped	OK	Normal	False	False				c:\winnt\system32\drivers\mspclock.sys			Kernel Driver	False	
flpydisk	Floppy Disk Driver	c:\winnt\system32\drivers\flpydisk.sys							Manual	Stopped	OK	Normal	False	False
Kernel Driver	True	Manual	Running	OK	Normal				mspqm	Microsoft Streaming Quality Manager Proxy	c:\winnt\system32\drivers\mspqm.sys		Kernel Driver	False
False	True								Manual	Stopped	OK	Normal	False	False
ftdisk	Volume Manager Driver								mup	Mup	c:\winnt\system32\drivers\mup.sys		File System	
c:\winnt\system32\drivers\ftdisk.sys						Kernel Driver	True		Driver	True	Boot	Running	OK	
Boot	Running	OK	Normal	False	True				True				Normal	
gpc	Generic Packet Classifier								nrc710	Nrc710	Not Available	Kernel Driver	False	
c:\winnt\system32\drivers\msgpc.sys						Kernel Driver	True		Disabled	Stopped	OK	Normal	False	
Manual	Running	OK	Normal	False	True				ndis	NDIS System Driver	c:\winnt\system32\drivers\ndis.sys		Kernel Driver	
i804prt	i8042 Keyboard and PS/2 Mouse Port Driver								Kernel Driver	True	Boot	Running	OK	
c:\winnt\system32\drivers\i804prt.sys						Kernel Driver	True		False	True			Normal	
System	Running	OK	Normal	False	True				False				Normal	
ini910u	ini910u	Not Available				Kernel Driver	False						Kernel Driver	
Disabled	Stopped	OK	Normal	False	False								Kernel Driver	


```

tdasync TDASYNC c:\winnt\system32\drivers\tdasync.sys
Kernel Driver False Manual Stopped OK Ignore
False False
tdipx TDIPX c:\winnt\system32\drivers\tdipx.sys Kernel
Driver False Manual Stopped OK Ignore False
False
tdnetb TDNETB c:\winnt\system32\drivers\tdnetb.sys Kernel
Driver False Manual Stopped OK Ignore False
False
tdpipe TDPIPE c:\winnt\system32\drivers\tdpipe.sys Kernel
Driver False Manual Stopped OK Ignore False
False
tdspix TDSPX c:\winnt\system32\drivers\tdspix.sys Kernel
Driver False Manual Stopped OK Ignore False
False
tdtcp TDTCP c:\winnt\system32\drivers\tdtcp.sys Kernel
Driver False Manual Stopped OK Ignore False
False
termdd Terminal Device Driver
c:\winnt\system32\drivers\termdd.sys Kernel Driver False
Disabled Stopped OK Normal False False
tga tga Not Available Kernel Driver False
System Stopped OK Ignore False False
udfs Udfs c:\winnt\system32\drivers\udfs.sys File System
Driver False Disabled Stopped OK Normal False
False
ultra66 ultra66 Not Available Kernel Driver False
Disabled Stopped OK Normal False False
update Microcode Update Driver
c:\winnt\system32\drivers\update.sys Kernel Driver True
Manual Running OK Normal False True
vgasave VgaSave c:\winnt\system32\drivers\vga.sys Kernel
Driver True System Running OK Ignore False
True
wanarp Remote Access IP ARP Driver
c:\winnt\system32\drivers\wanarp.sys Kernel Driver True
Manual Running OK Normal False True
wdica WDICA Not Available Kernel Driver False
Manual Stopped OK Ignore False False

```

[Environment Variables]

```

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Os2LibPath %SystemRoot%\system32\os2\dll; <SYSTEM>
Path
%SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;
C:\Program Files\Microsoft SQL Server\80\Tools\BINN <SYSTEM>
windir %SystemRoot% <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE x86 <SYSTEM>
PROCESSOR_LEVEL 15 <SYSTEM>
PROCESSOR_IDENTIFIER x86 Family 15 Model 2 Stepping 7,
GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0207 <SYSTEM>
NUMBER_OF_PROCESSORS 2 <SYSTEM>
PATHEXT
.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp
CLIENT10\Administrator
TMP %USERPROFILE%\Local Settings\Temp
CLIENT10\Administrator

```

[Jobs]

[Following are sub-categories of this main category]

[Print]

```

Document Size Owner Notify Status Time Submitted
Start Time Until TimeElapsed Time Pages Printed Job ID
Priority ParametersDriver Name Print Processor Host Print
Queue Data Type Name
No print jobs

```

[Network Connections]

```

Local Name Remote Name Type Status User Name
E: \\192.168.132.253\e$ Disk OK
CLIENT10\Administrator

```

[Running Tasks]

```

Name Path Process ID Priority Min Working Set Max
Working Set Start Time Version Size File Date
system idle process Not Available 0 0 Not
Available Not Available Not Available Unknown Unknown
Unknown
system Not Available 8 8 0 1413120
Not Available Unknown Unknown Unknown
sms.exe c:\winnt\system32\sms.exe 164 11 204800
1413120 2/23/2003 4:23:36 PM 5.00.2195.2901 44.27 KB
(45,328 bytes) 12/7/1999 7:00:00 AM
csrss.exe Not Available 188 13 Not Available
Not Available 2/23/2003 4:23:41 PM Unknown Unknown
Unknown
winlogon.exe c:\winnt\system32\winlogon.exe 184 13
204800 1413120 2/23/2003 4:23:42 PM 5.00.2195.2953
173.77 KB (177,936 bytes) 12/7/1999 7:00:00 AM
services.exe c:\winnt\system32\services.exe 236 9
204800 1413120 2/23/2003 4:23:43 PM 5.00.2195.2780
86.77 KB (88,848 bytes) 12/7/1999 7:00:00 AM
lsass.exe c:\winnt\system32\lsass.exe 248 9 204800
1413120 2/23/2003 4:23:44 PM 5.00.2195.2964 32.77 KB
(33,552 bytes) 12/7/1999 7:00:00 AM
svchost.exe c:\winnt\system32\svchost.exe 416 8
204800 1413120 2/23/2003 4:23:47 PM 5.00.2134.1
7.77 KB (7,952 bytes) 12/7/1999 7:00:00 AM
spoolsv.exe c:\winnt\system32\spoolsv.exe 448 8
204800 1413120 2/23/2003 4:23:48 PM 5.00.2161.1
43.77 KB (44,816 bytes) 2/10/2003 11:47:14 AM
msdtc.exe c:\winnt\system32\msdtc.exe 476 8 204800
1413120 2/23/2003 4:23:48 PM 1999.9.3421.3 6.77 KB
(6,928 bytes) 2/10/2003 11:57:24 AM
svchost.exe c:\winnt\system32\svchost.exe 608 8
204800 1413120 2/23/2003 4:23:50 PM 5.00.2134.1
7.77 KB (7,952 bytes) 12/7/1999 7:00:00 AM
llssrv.exe c:\winnt\system32\llssrv.exe 632 9 204800
1413120 2/23/2003 4:23:50 PM 5.00.2195.2649 114.27 KB
(117,008 bytes) 5/4/2001 1:05:02 PM
regsvc.exe c:\winnt\system32\regsvc.exe 704 8 204800
1413120 2/23/2003 4:23:50 PM 5.00.2195.2104 65.27 KB
(66,832 bytes) 2/10/2003 5:30:11 PM
mstask.exe c:\winnt\system32\mstask.exe 840 8 204800
1413120 2/23/2003 4:24:03 PM 4.71.2195.1 115.27 KB
(118,032 bytes) 2/10/2003 5:30:05 PM
tcpvcs.exe c:\winnt\system32\tcpvcs.exe 876 8
204800 1413120 2/23/2003 4:24:03 PM 5.00.2134.1
24.77 KB (25,360 bytes) 12/7/1999 7:00:00 AM
winmgmt.exe c:\winnt\system32\wbem\winmgmt.exe 908 8
204800 1413120 2/23/2003 4:24:03 PM 1.50.1085.0029
192.08 KB (196,685 bytes) 2/10/2003 5:30:22 PM

```

dfssvc.exe	c:\winnt\system32\dfssvc.exe	800	8	204800	
1413120	2/23/2003 4:24:08 PM	5.00.2195.2841		88.27 KB	
(90,384 bytes)	2/10/2003 5:29:52 PM				
svchost.exe	c:\winnt\system32\svchost.exe	1132	8		
204800	1413120 2/23/2003 4:25:19 PM	5.00.2134.1			
7.77 KB (7,952 bytes)	12/7/1999 7:00:00 AM				
explorer.exe	c:\winnt\explorer.exe	1224	8	204800	
1413120	2/23/2003 4:25:23 PM	5.00.3315.2846		237.27 KB	
(242,960 bytes)	2/10/2003 5:30:17 PM				
iexplore.exe	c:\program files\internet explorer\iexplore.exe				
1108	8 204800 1413120 2/23/2003 4:26:21 PM				
5.00.2920.0000	59.27 KB (60,688 bytes)			2/10/2003 5:01:11 PM	
dllhost.exe	Not Available	1168	8	Not Available	
Not Available	2/23/2003 4:26:23 PM			Unknown Unknown	
Unknown					
mdm.exe	c:\winnt\system32\mdm.exe	1440	8	204800	
1413120	2/23/2003 4:26:24 PM	6.00.8424		121.29 KB (124,200 bytes)	
bytes)	2/10/2003 11:59:09 AM				
cmd.exe	c:\winnt\system32\cmd.exe	1528	8	204800	
1413120	2/23/2003 7:34:07 PM	5.00.2195.2104		230.77 KB	
(236,304 bytes)	12/7/1999 7:00:00 AM				
mmc.exe	c:\winnt\system32\mmc.exe	1340	8	204800	
1413120	2/24/2003 7:42:02 AM	5.00.2195.2301		589.27 KB	
(603,408 bytes)	2/10/2003 5:29:59 PM				
rsvp.exe	c:\winnt\system32\rsvp.exe	1932	8	204800	
1413120	2/24/2003 7:43:22 AM	5.00.2167.1		172.77 KB	
(176,912 bytes)	12/7/1999 7:00:00 AM				

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer	Path
traffic.dll	5.00.2139.1	30.77 KB (31,504 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\traffic.dll					
rsvp.exe	5.00.2167.1	172.77 KB (176,912 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\rsvp.exe					
wbemprox.dll	1.50.1085.0045	40.08 KB (41,040 bytes)		Microsoft Corporation	2/10/2003 5:30:22 PM
c:\winnt\system32\wbem\wbemprox.dll					
rassapi.dll	5.00.2188.1	14.27 KB (14,608 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\rassapi.dll					
adsnt.dll	5.00.2195.2778	195.27 KB (199,952 bytes)		Microsoft Corporation	2/10/2003 5:29:48 PM
c:\winnt\system32\adsnt.dll					
dbghelp.dll	5.00.2195.2104	159.27 KB (163,088 bytes)		Microsoft Corporation	5/4/2001 1:05:02 PM
c:\winnt\system32\dbghelp.dll					
localsec.dll	5.00.2195.2130	230.27 KB (235,792 bytes)		Microsoft Corporation	2/10/2003 5:29:58 PM
c:\winnt\system32\localsec.dll					
devmgr.dll	5.00.2166.1	215.77 KB (220,944 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\devmgr.dll					
filemgmt.dll	5.00.2195.2165	287.27 KB (294,160 bytes)		Microsoft Corporation	2/10/2003 5:29:55 PM
c:\winnt\system32\filemgmt.dll					
pdh.dll	5.00.2195.2739	147.77 KB (151,312 bytes)		Microsoft Corporation	2/10/2003 5:30:10 PM
c:\winnt\system32\pdh.dll					
smlogcfig.dll	5.00.2195.2485	273.27 KB (279,824 bytes)		Microsoft Corporation	2/10/2003 5:30:14 PM
c:\winnt\system32\smlogcfig.dll					
cabinet.dll	5.00.2147.1	54.77 KB (56,080 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\cabinet.dll					
msinfo32.dll	5.00.2177.1	312.27 KB (319,760 bytes)		Microsoft Corporation	2/10/2003 5:01:28 PM
c:\program files\common files\microsoft shared\msinfo\msinfo32.dll					
riched20.dll	5.30.23.1205	421.27 KB (431,376 bytes)		Microsoft Corporation	2/10/2003 5:30:11 PM
c:\winnt\system32\riched20.dll					
riched32.dll	5.00.2134.1	3.77 KB (3,856 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\riched32.dll					
els.dll	5.00.2175.1	151.27 KB (154,896 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\els.dll					
ntmsmgr.dll	1,0,0,1	427.77 KB (438,032 bytes)		Microsoft Corporation and HighGround Systems, Inc.	12/7/1999 7:00:00 AM
c:\winnt\system32\ntmsmgr.dll					
mmfutil.dll	5.0.1085.0000	32.06 KB (32,829 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\mmfutil.dll					
logdrive.dll	1.50.1085.0000	200.06 KB (204,863 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\logdrive.dll					
dfrgres.dll	5.00.2150.1	27.50 KB (28,160 bytes)		Executive Software International, Inc.	12/7/1999 7:00:00 AM
c:\winnt\system32\dfrgres.dll					
dfrgsnap.dll	5.00.2195.2104	41.77 KB (42,768 bytes)		Executive Software International, Inc.	2/10/2003 5:29:52 PM
c:\winnt\system32\dfrgsnap.dll					
dmskres.dll	2195.2104.297.3	119.50 KB (122,368 bytes)		Microsoft Corp., VERITAS Software	2/10/2003 5:29:52 PM
c:\winnt\system32\dmskres.dll					
dmutil.dll	2195.2104.297.3	42.27 KB (43,280 bytes)		VERITAS Software Corp.	2/10/2003 5:29:52 PM
c:\winnt\system32\dmutil.dll					
ntmsapi.dll	5.00.1948.1	51.77 KB (53,008 bytes)		Microsoft Corporation	2/10/2003 5:30:08 PM
c:\winnt\system32\ntmsapi.dll					
dmskmgr.dll	2215.2215.297.3	160.27 KB (164,112 bytes)		Microsoft Corp., VERITAS Software	2/10/2003 5:29:52 PM
c:\winnt\system32\dmskmgr.dll					
mycomput.dll	5.00.2134.1	107.77 KB (110,352 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\mycomput.dll					
mmcmdmgr.dll	5.00.2178.1	815.27 KB (834,832 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\mmcmdmgr.dll					
mmc.exe	5.00.2195.2301	589.27 KB (603,408 bytes)		Microsoft Corporation	2/10/2003 5:29:59 PM
c:\winnt\system32\mmc.exe					
cmd.exe	5.00.2195.2104	230.77 KB (236,304 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\cmd.exe					
mdm.exe	6.00.8424	121.29 KB (124,200 bytes)		Microsoft Corporation	2/10/2003 11:59:09 AM
c:\winnt\system32\mdm.exe					
sensapi.dll	5.00.2163.1	6.77 KB (6,928 bytes)		Microsoft Corporation	12/7/1999 7:00:00 AM
c:\winnt\system32\sensapi.dll					
iexplore.exe	5.00.2920.0000	59.27 KB (60,688 bytes)		Microsoft Corporation	2/10/2003 5:01:11 PM
c:\program files\internet explorer\iexplore.exe					
mshtml.dll	5.00.3315.2870	227.27 KB (232,720 bytes)		Microsoft Corporation	2/10/2003 5:30:01 PM
c:\winnt\system32\mshtml.dll					
imm32.dll	5.00.2195.2821	94.27 KB (96,528 bytes)		Microsoft Corporation	2/10/2003 5:29:56 PM
c:\winnt\system32\imm32.dll					
netplwiz.dll	5.00.2195.2370	169.77 KB (173,840 bytes)		Microsoft Corporation	2/10/2003 5:30:07 PM
c:\winnt\system32\netplwiz.dll					

netmsg.dll 5.00.2137.1	152.50 KB (156,160 bytes)	12/7/1999	webcheck.dll 5.00.3315.1000	251.77 KB (257,808 bytes)	
7:00:00 AM	Microsoft Corporation		2/10/2003 5:30:16 PM	Microsoft Corporation	
c:\winnt\system32\netmsg.dll			c:\winnt\system32\webcheck.dll		
netui2.dll 5.00.2134.1	280.27 KB (286,992 bytes)	12/7/1999	ntshrui.dll 5.00.2134.1	46.77 KB (47,888 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		7:00:00 AM	Microsoft Corporation	
c:\winnt\system32\netui2.dll			c:\winnt\system32\ntshrui.dll		
mprui.dll 5.00.2195.2104	54.77 KB (56,080 bytes)	2/10/2003	mydocs.dll 5.00.2920.0000	55.77 KB (57,104 bytes)	12/7/1999
5:29:59 PM	Microsoft Corporation		7:00:00 AM	Microsoft Corporation	
c:\winnt\system32\mprui.dll			c:\winnt\system32\mydocs.dll		
imgutil.dll 5.00.3315.2870	30.77 KB (31,504 bytes)	2/10/2003	browseui.dll 5.00.3315.2846	788.77 KB (807,696 bytes)	
5:29:56 PM	Microsoft Corporation		2/10/2003 5:29:48 PM	Microsoft Corporation	
c:\winnt\system32\imgutil.dll			c:\winnt\system32\browseui.dll		
webvw.dll 5.00.2920.0000	1.06 MB (1,115,408 bytes)	12/7/1999	shdocvw.dll 5.00.3315.2879	1.05 MB (1,104,144 bytes)	
7:00:00 AM	Microsoft Corporation		2/10/2003 5:30:13 PM	Microsoft Corporation	
c:\winnt\system32\webvw.dll			c:\winnt\system32\shdocvw.dll		
msls31.dll 3.10.337.0	145.27 KB (148,752 bytes)	12/7/1999 7:00:00 AM	explorer.exe 5.00.3315.2846	237.27 KB (242,960 bytes)	
Microsoft Corporation	c:\winnt\system32\msls31.dll		2/10/2003 5:30:17 PM	Microsoft Corporation	
msdbg.dll 6.00.8424	67.50 KB (69,120 bytes)	2/10/2003 11:59:10 AM	c:\winnt\explorer.exe		
Microsoft Corporation	c:\winnt\system32\msdbg.dll		tapisrv.dll 5.00.2195.2955	169.27 KB (173,328 bytes)	2/10/2003
shdoclc.dll 5.00.3315.2879	324.50 KB (332,288 bytes)	2/10/2003	5:30:15 PM	Microsoft Corporation	
5:30:13 PM	Microsoft Corporation		c:\winnt\system32\tapisrv.dll		
c:\winnt\system32\shdoclc.dll			dfssvc.exe 5.00.2195.2841	88.27 KB (90,384 bytes)	2/10/2003
pdm.dll 6.00.8424	179.27 KB (183,574 bytes)	2/10/2003 11:59:10 AM	5:29:52 PM	Microsoft Corporation	
Microsoft Corporation	c:\winnt\system32\pdm.dll		c:\winnt\system32\dfssvc.exe		
mshtml.dll 5.00.3315.2870	2.24 MB (2,345,232 bytes)	2/10/2003	netui1.dll 5.00.2134.1	210.27 KB (215,312 bytes)	12/7/1999
5:30:00 PM	Microsoft Corporation		7:00:00 AM	Microsoft Corporation	
c:\winnt\system32\mshtml.dll			c:\winnt\system32\netui1.dll		
mlang.dll 5.00.3103.1000	510.77 KB (523,024 bytes)	2/10/2003	netui0.dll 5.00.2134.1	70.27 KB (71,952 bytes)	12/7/1999
5:29:59 PM	Microsoft Corporation		7:00:00 AM	Microsoft Corporation	
c:\winnt\system32\mlang.dll			c:\winnt\system32\netui0.dll		
urlmon.dll 5.00.3315.1000	441.27 KB (451,856 bytes)	2/10/2003	ntlanman.dll 5.00.2157.1	35.27 KB (36,112 bytes)	
5:30:15 PM	Microsoft Corporation		12/7/1999 7:00:00 AM	Microsoft Corporation	
c:\winnt\system32\urlmon.dll			c:\winnt\system32\ntlanman.dll		
linkinfo.dll 5.00.2134.1	15.77 KB (16,144 bytes)	12/7/1999	wshnetbs.dll 5.00.2134.1	7.77 KB (7,952 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation		7:00:00 AM	Microsoft Corporation	
c:\winnt\system32\linkinfo.dll			c:\winnt\system32\wshnetbs.dll		
wininet.dll 5.00.3315.1000	456.77 KB (467,728 bytes)	2/10/2003	ntmarta.dll 5.00.2195.2862	98.77 KB (101,136 bytes)	2/10/2003
5:30:16 PM	Microsoft Corporation		5:30:08 PM	Microsoft Corporation	
c:\winnt\system32\wininet.dll			c:\winnt\system32\ntmarta.dll		
browseui.dll 5.00.3315.2846	34.50 KB (35,328 bytes)	2/10/2003 5:29:48 PM	provthrd.dll 1.50.1085.0000	68.07 KB (69,708 bytes)	
Microsoft Corporation			2/10/2003 5:01:22 PM	Microsoft Corporation	
c:\winnt\system32\browseui.dll			c:\winnt\system32\wbem\provthrd.dll		
faxshell.dll 5.00.2134.1	8.27 KB (8,464 bytes)	12/7/1999 7:00:00 AM	ntevt.dll 1.50.1085.0000	192.06 KB (196,669 bytes)	12/7/1999
Microsoft Corporation	c:\winnt\system32\faxshell.dll		7:00:00 AM	Microsoft Corporation	
msacm32.dll 5.00.2134.1	65.27 KB (66,832 bytes)	12/7/1999 7:00:00 AM	c:\winnt\system32\wbem\ntevt.dll		
Microsoft Corporation			perfos.dll 5.00.2155.1	21.27 KB (21,776 bytes)	12/7/1999
c:\winnt\system32\msacm32.dll			7:00:00 AM	Microsoft Corporation	
avifil32.dll 5.00.2134.1	76.27 KB (78,096 bytes)	12/7/1999	c:\winnt\system32\perfos.dll		
7:00:00 AM	Microsoft Corporation		psapi.dll 5.00.2134.1	28.27 KB (28,944 bytes)	12/7/1999
c:\winnt\system32\avifil32.dll			7:00:00 AM	Microsoft Corporation	
msvfw32.dll 5.00.2134.1	113.77 KB (116,496 bytes)	12/7/1999 7:00:00 AM	c:\winnt\system32\psapi.dll		
Microsoft Corporation			framedyn.dll 1.50.1085.0000	164.05 KB (167,992 bytes)	
c:\winnt\system32\msvfw32.dll			12/7/1999 7:00:00 AM	Microsoft Corporation	
docprop2.dll 5.00.2178.1	297.77 KB (304,912 bytes)	12/7/1999 7:00:00 AM	c:\winnt\system32\wbem\framedyn.dll		
Microsoft Corporation			cimwin32.dll 1.50.1085.0038	1.02 MB (1,073,232 bytes)	
c:\winnt\system32\docprop2.dll			2/10/2003 5:30:21 PM	Microsoft Corporation	
msi.dll 1.11.2405.0	1.69 MB (1,767,184 bytes)	2/10/2003	c:\winnt\system32\wbem\cimwin32.dll		
5:30:01 PM	Microsoft Corporation		wbemsvcs.dll 1.50.1085.0007	40.07 KB (41,036 bytes)	
c:\winnt\system32\msi.dll			2/10/2003 5:30:22 PM	Microsoft Corporation	
powrprof.dll 5.00.3103.1000	13.27 KB (13,584 bytes)	2/10/2003 5:30:10 PM	c:\winnt\system32\wbem\wbemsvcs.dll		
Microsoft Corporation			wbemess.dll 1.50.1085.0039	364.07 KB (372,804 bytes)	
c:\winnt\system32\powrprof.dll			2/10/2003 5:30:22 PM	Microsoft Corporation	
batmeter.dll 5.00.3103.1000	20.27 KB (20,752 bytes)	2/10/2003 5:29:48 PM	c:\winnt\system32\wbem\wbemess.dll		
Microsoft Corporation			fastprox.dll 1.50.1085.0037	144.08 KB (147,536 bytes)	
c:\winnt\system32\batmeter.dll			2/10/2003 5:30:21 PM	Microsoft Corporation	
stobject.dll 5.00.2195.2780	79.27 KB (81,168 bytes)	2/10/2003	c:\winnt\system32\wbem\fastprox.dll		
5:30:14 PM	Microsoft Corporation				
c:\winnt\system32\stobject.dll					

wbemcore.dll	1.50.1085.0036	628.07 KB (643,140 bytes)	
2/10/2003 5:30:22 PM Microsoft Corporation			
c:\winnt\system32\wbem\wbemcore.dll			
wbemcomn.dll	1.50.1085.0021	692.07 KB (708,675 bytes)	
2/10/2003 5:30:21 PM Microsoft Corporation			
c:\winnt\system32\wbem\wbemcomn.dll			
winmgmt.exe	1.50.1085.0029	192.08 KB (196,685 bytes)	
2/10/2003 5:30:22 PM Microsoft Corporation			
c:\winnt\system32\wbem\winmgmt.exe			
simp tcp.dll	5.00.2134.1	19.27 KB (19,728 bytes)	2/10/2003
11:57:19 AM Microsoft Corporation			
c:\winnt\system32\simp tcp.dll			
tcp svcs.exe	5.00.2134.1	24.77 KB (25,360 bytes)	
12/7/1999 7:00:00 AM Microsoft Corporation			
c:\winnt\system32\tcp svcs.exe			
msidle.dll	5.00.2920.0000	6.27 KB (6,416 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation c:\winnt\system32\msidle.dll			
mstask.exe	4.71.2195.1	115.27 KB (118,032 bytes)	2/10/2003
5:30:05 PM Microsoft Corporation			
c:\winnt\system32\mstask.exe			
regsvcs.exe	5.00.2195.2104	65.27 KB (66,832 bytes)	2/10/2003
5:30:11 PM Microsoft Corporation			
c:\winnt\system32\regsvcs.exe			
llsrpc.dll	5.00.2149.1	45.77 KB (46,864 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\llsrpc.dll			
llssrv.exe	5.00.2195.2649	114.27 KB (117,008 bytes)	5/4/2001
1:05:02 PM Microsoft Corporation			
c:\winnt\system32\llssrv.exe			
wmi.dll	5.00.2191.1	6.27 KB (6,416 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation c:\winnt\system32\wmi.dll			
netshell.dll	5.00.2195.2779	457.27 KB (468,240 bytes)	2/10/2003
5:30:07 PM Microsoft Corporation			
c:\winnt\system32\netshell.dll			
netman.dll	5.00.2195.2779	89.27 KB (91,408 bytes)	2/10/2003
5:30:06 PM Microsoft Corporation			
c:\winnt\system32\netman.dll			
rasdlg.dll	5.00.2195.2671	514.27 KB (526,608 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\rasdlg.dll			
netcfgx.dll	5.00.2195.2228	534.77 KB (547,600 bytes)	2/10/2003
5:30:06 PM Microsoft Corporation			
c:\winnt\system32\netcfgx.dll			
rasmans.dll	5.00.2195.2728	147.27 KB (150,800 bytes)	
2/10/2003 5:30:11 PM Microsoft Corporation			
c:\winnt\system32\rasmans.dll			
ntmsdba.dll	5.00.2195.2779	167.27 KB (171,280 bytes)	
2/10/2003 5:30:08 PM Microsoft Corporation			
c:\winnt\system32\ntmsdba.dll			
sens.dll	5.00.2163.1	36.77 KB (37,648 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\sens.dll			
iashlpr.dll	5.00.2184.1	33.27 KB (34,064 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\iashlpr.dll			
iasacct.dll	5.00.2134.1	28.27 KB (28,944 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\iasacct.dll			
iasuser.dll	5.00.2134.1	25.77 KB (26,384 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\iasuser.dll			
iasnap.dll	5.00.2195.2104	58.77 KB (60,176 bytes)	2/10/2003
5:29:55 PM Microsoft Corporation			
c:\winnt\system32\iasnap.dll			
iaspipe.dll	5.00.2134.1	41.77 KB (42,768 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\iaspipe.dll			
expsrv.dll	6.0.8540	370.27 KB (379,152 bytes)	2/10/2003 5:29:54 PM
Microsoft Corporation c:\winnt\system32\expsrv.dll			
vbajet32.dll	6.1.8268	30.27 KB (30,992 bytes)	2/10/2003
5:30:16 PM Microsoft Corporation			
c:\winnt\system32\vbajet32.dll			
msjtes40.dll	4.00.4229.0	236.27 KB (241,936 bytes)	
2/10/2003 5:30:04 PM Microsoft Corporation			
c:\winnt\system32\msjtes40.dll			
oledb32r.dll	2.70.9001.0	built by: Lab06_N(dagbuild) 64.00 KB	
(65,536 bytes) 2/10/2003 5:55:10 PM Microsoft Corporation			
c:\program files\common files\system\ole db\oledb32r.dll			
comdlg32.dll	5.00.3103.1000	236.77 KB (242,448 bytes)	
12/7/1999 7:00:00 AM Microsoft Corporation			
c:\winnt\system32\comdlg32.dll			
msdart.dll	2.71.9031.4	built by: Lab06_N(dagbuild) 124.00 KB (126,976	
bytes) 9/27/2002 12:22:40 PM Microsoft Corporation			
c:\winnt\system32\msdart.dll			
oledb32.dll	2.71.9031.4	built by: Lab06_N(dagbuild) 408.00 KB	
(417,792 bytes) 9/27/2002 12:22:42 PM Microsoft Corporation			
c:\program files\common files\system\ole db\oledb32.dll			
msjint40.dll	4.00.2927.2	148.27 KB (151,824 bytes)	
2/10/2003 5:30:03 PM Microsoft Corporation			
c:\winnt\system32\msjint40.dll			
msjter40.dll	4.00.2927.2	52.27 KB (53,520 bytes)	
2/10/2003 5:30:04 PM Microsoft Corporation			
c:\winnt\system32\msjter40.dll			
mswstr10.dll	4.00.3829.2	600.27 KB (614,672 bytes)	
2/10/2003 5:30:05 PM Microsoft Corporation			
c:\winnt\system32\mswstr10.dll			
msjet40.dll	4.00.4431.3	1.43 MB (1,503,504 bytes)	2/10/2003
5:30:03 PM Microsoft Corporation			
c:\winnt\system32\msjet40.dll			
msjtoledb40.dll	4.00.4331.4	340.27 KB (348,432 bytes)	
2/10/2003 5:30:03 PM Microsoft Corporation			
c:\winnt\system32\msjtoledb40.dll			
iasrad.dll	5.00.2139.1	94.27 KB (96,528 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\iasrad.dll			
iassam.dll	5.00.2160.1	96.27 KB (98,576 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\iassam.dll			
iasads.dll	5.00.2134.1	73.77 KB (75,536 bytes)	12/7/1999
7:00:00 AM Microsoft Corporation			
c:\winnt\system32\iasads.dll			
iaspolcy.dll	5.00.2134.1	25.27 KB (25,872 bytes)	
12/7/1999 7:00:00 AM Microsoft Corporation			
c:\winnt\system32\iaspolcy.dll			
iassvcs.dll	5.00.2195.2104	58.77 KB (60,176 bytes)	2/10/2003
5:29:55 PM Microsoft Corporation			
c:\winnt\system32\iassvcs.dll			
iasdo.dll	5.00.2195.2104	261.77 KB (268,048 bytes)	2/10/2003
5:29:55 PM Microsoft Corporation			
c:\winnt\system32\iasdo.dll			
ntmssvc.dll	5.00.2195.2779	391.27 KB (400,656 bytes)	
2/10/2003 5:30:08 PM Microsoft Corporation			
c:\winnt\system32\ntmssvc.dll			
ias.dll	5.00.2134.1	7.27 KB (7,440 bytes)	12/7/1999 7:00:00 AM
Microsoft Corporation c:\winnt\system32\ias.dll			
es.dll	2000.2.3471.1	222.27 KB (227,600 bytes)	2/10/2003
5:29:54 PM Microsoft Corporation			
c:\winnt\system32\es.dll			
mtxoci.dll	2000.2.3471.1	101.77 KB (104,208 bytes)	2/10/2003
5:30:06 PM Microsoft Corporation			
c:\winnt\system32\mtxoci.dll			
resutils.dll	5.00.2195.2787	39.77 KB (40,720 bytes)	2/10/2003
5:30:11 PM Microsoft Corporation			
c:\winnt\system32\resutils.dll			

clusapi.dll 5.00.2195.2104 54.27 KB (55,568 bytes) 2/10/2003 5:29:50 PM Microsoft Corporation	mfc42u.dll 6.00.8665.0 972.05 KB (995,384 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\clusapi.dll	c:\winnt\system32\mfc42u.dll
msvcp50.dll 5.00.7051 552.50 KB (565,760 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation	polagent.dll 5.00.2183.1 108.27 KB (110,864 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\msvcp50.dll	c:\winnt\system32\polagent.dll
xolehlp.dll 1999.9.3421.3 17.27 KB (17,680 bytes) 2/10/2003 11:57:24 AM Microsoft Corporation	scecli.dll 5.00.2195.2780 105.27 KB (107,792 bytes) 2/10/2003 5:30:12 PM Microsoft Corporation
c:\winnt\system32\xolehlp.dll	c:\winnt\system32\scecli.dll
msdtclog.dll 1999.9.3421.3 89.77 KB (91,920 bytes) 2/10/2003 11:57:24 AM Microsoft Corporation	atl.dll 3.00.8449 57.56 KB (58,938 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\msdtclog.dll	c:\winnt\system32\atl.dll
mtxclu.dll 2000.2.3471.1 51.27 KB (52,496 bytes) 2/10/2003 5:30:06 PM Microsoft Corporation	certcli.dll 5.00.2195.2778 130.77 KB (133,904 bytes) 2/10/2003 5:29:50 PM Microsoft Corporation
c:\winnt\system32\mtxclu.dll	c:\winnt\system32\certcli.dll
msdtcprx.dll 2000.2.3471.1 665.77 KB (681,744 bytes) 2/10/2003 5:30:00 PM Microsoft Corporation	esent.dll 6.0.3940.13 1.08 MB (1,135,376 bytes) 2/10/2003 5:29:54 PM Microsoft Corporation
c:\winnt\system32\msdtcprx.dll	c:\winnt\system32\esent.dll
txfaux.dll 2000.2.3471.1 374.27 KB (383,248 bytes) 2/10/2003 5:30:15 PM Microsoft Corporation	ntdsatq.dll 5.00.2195.2878 31.27 KB (32,016 bytes) 2/10/2003 5:30:07 PM Microsoft Corporation
c:\winnt\system32\txfaux.dll	c:\winnt\system32\ntdsatq.dll
msdtctm.dll 2000.2.3471.1 1.07 MB (1,120,528 bytes) 2/10/2003 5:30:00 PM Microsoft Corporation	ntdsa.dll 5.00.2195.2899 990.77 KB (1,014,544 bytes) 2/10/2003 5:30:07 PM Microsoft Corporation
c:\winnt\system32\msdtctm.dll	c:\winnt\system32\ntdsa.dll
msdtc.exe 1999.9.3421.3 6.77 KB (6,928 bytes) 2/10/2003 11:57:24 AM Microsoft Corporation	kdcsvc.dll 5.00.2195.2878 137.77 KB (141,072 bytes) 2/10/2003 5:29:58 PM Microsoft Corporation
c:\winnt\system32\msdtc.exe	c:\winnt\system32\kdcsvc.dll
inetpp.dll 5.00.2195.2842 65.27 KB (66,832 bytes) 2/10/2003 5:29:56 PM Microsoft Corporation	sfmapi.dll 5.00.2134.1 38.77 KB (39,696 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\inetpp.dll	c:\winnt\system32\sfmapi.dll
win32spl.dll 5.00.2195.2780 92.27 KB (94,480 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation	rassfm.dll 5.00.2195.2671 21.27 KB (21,776 bytes) 2/10/2003 5:30:11 PM Microsoft Corporation
c:\winnt\system32\win32spl.dll	c:\winnt\system32\rassfm.dll
usbmon.dll 5.00.2195.2780 11.27 KB (11,536 bytes) 2/10/2003 5:30:15 PM Microsoft Corporation	mpr.dll 5.00.2195.2779 53.27 KB (54,544 bytes) 2/10/2003 5:29:59 PM Microsoft Corporation
c:\winnt\system32\usbmon.dll	c:\winnt\system32\mpr.dll
tcpmon.dll 5.00.2195.2780 40.77 KB (41,744 bytes) 2/10/2003 5:30:15 PM Microsoft Corporation	rsabase.dll 5.00.2195.2228 128.27 KB (131,344 bytes) 5/4/2001 1:05:02 PM Microsoft Corporation
c:\winnt\system32\tcpmon.dll	c:\winnt\system32\rsabase.dll
pjlmon.dll 5.00.2165.1 12.77 KB (13,072 bytes) 11/30/1999 6:39:36 PM Microsoft Corporation	schannel.dll 5.00.2195.2922 138.27 KB (141,584 bytes) 5/4/2001 1:05:02 PM Microsoft Corporation
c:\winnt\system32\pjlmon.dll	c:\winnt\system32\schannel.dll
cnbjmon.dll 5.00.2134.1 43.77 KB (44,816 bytes) 11/30/1999 6:38:48 PM Microsoft Corporation	netlogon.dll 5.00.2195.2865 357.77 KB (366,352 bytes) 2/10/2003 5:30:06 PM Microsoft Corporation
c:\winnt\system32\cnbjmon.dll	c:\winnt\system32\netlogon.dll
localspl.dll 5.00.2195.2793 246.77 KB (252,688 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation	kerberos.dll 5.00.2195.2913 198.77 KB (203,536 bytes) 2/10/2003 5:29:58 PM Microsoft Corporation
c:\winnt\system32\localspl.dll	c:\winnt\system32\kerberos.dll
spoolss.dll 5.00.2161.1 61.77 KB (63,248 bytes) 2/10/2003 11:47:14 AM Microsoft Corporation	msprivs.dll 5.00.2154.1 41.50 KB (42,496 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\spoolss.dll	c:\winnt\system32\msprivs.dll
spoolsv.exe 5.00.2161.1 43.77 KB (44,816 bytes) 2/10/2003 11:47:14 AM Microsoft Corporation	samsrv.dll 5.00.2195.2918 369.77 KB (378,640 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\spoolsv.exe	c:\winnt\system32\samsrv.dll
rpess.dll 5.00.2195.2815 231.27 KB (236,816 bytes) 2/10/2003 5:30:12 PM Microsoft Corporation	lsasrv.dll 5.00.2195.2964 492.77 KB (504,592 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\rpess.dll	c:\winnt\system32\lsasrv.dll
svchost.exe 5.00.2134.1 7.77 KB (7,952 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation	lsass.exe 5.00.2195.2964 32.77 KB (33,552 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\svchost.exe	c:\winnt\system32\lsass.exe
iissuba.dll 5.00.0984 9.77 KB (10,000 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation	ntlsapi.dll 5.00.2134.1 6.77 KB (6,928 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\iissuba.dll	c:\winnt\system32\ntlsapi.dll
dssenh.dll 5.00.2195.2228 142.77 KB (146,192 bytes) 2/10/2003 5:31:00 PM Microsoft Corporation	xactsrv.dll 5.00.2134.1 90.27 KB (92,432 bytes) 12/7/1999 7:00:00 AM Microsoft Corporation
c:\winnt\system32\dssenh.dll	c:\winnt\system32\xactsrv.dll
oakley.dll 5.00.2195.2785 378.77 KB (387,856 bytes) 2/10/2003 5:30:08 PM Microsoft Corporation	wmicore.dll 5.00.2195.2842 72.27 KB (74,000 bytes) 2/10/2003 5:30:17 PM Microsoft Corporation
c:\winnt\system32\oakley.dll	c:\winnt\system32\wmicore.dll

rasadhlp.dll	5.00.2168.1	7.27 KB (7,440 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\rasadhlp.dll
winnr.dll	5.00.2160.1	18.77 KB (19,216 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\winnr.dll
mr20.dll	5.00.2195.2871	35.77 KB (36,624 bytes)	2/10/2003	5:30:11 PM	Microsoft Corporation	c:\winnt\system32\mr20.dll
wshtcpip.dll	5.00.2195.2104	17.27 KB (17,680 bytes)	2/10/2003	5:30:17 PM	Microsoft Corporation	c:\winnt\system32\wshtcpip.dll
msafd.dll	5.00.2195.2779	106.77 KB (109,328 bytes)	2/10/2003	5:29:59 PM	Microsoft Corporation	c:\winnt\system32\msafd.dll
mswsock.dll	5.00.2195.2871	62.77 KB (64,272 bytes)	2/10/2003	5:30:05 PM	Microsoft Corporation	c:\winnt\system32\mswsock.dll
msgsvc.dll	5.00.2195.2939	34.27 KB (35,088 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\msgsvc.dll
browser.dll	5.00.2195.2778	48.27 KB (49,424 bytes)	2/10/2003	5:29:48 PM	Microsoft Corporation	c:\winnt\system32\browser.dll
alrsvc.dll	5.00.2134.1	17.77 KB (18,192 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\alrsvc.dll
trkwks.dll	5.00.2166.1	88.77 KB (90,896 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\trkwks.dll
seclogon.dll	5.00.2135.1	15.77 KB (16,144 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\seclogon.dll
psbase.dll	5.00.2195.2779	111.77 KB (114,448 bytes)	2/10/2003	5:30:10 PM	Microsoft Corporation	c:\winnt\system32\psbase.dll
cryptsvc.dll	5.00.2181.1	61.77 KB (63,248 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\cryptsvc.dll
cryptdll.dll	5.00.2135.1	41.27 KB (42,256 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\cryptdll.dll
wkssvc.dll	5.00.2195.2780	95.27 KB (97,552 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\wkssvc.dll
srvsvc.dll	5.00.2195.2904	79.27 KB (81,168 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\srvsvc.dll
cfgmgr32.dll	5.00.2134.1	16.77 KB (17,168 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\cfgmgr32.dll
dmserver.dll	2195.2778.297.3	11.77 KB (12,048 bytes)	2/10/2003	5:29:52 PM	VERITAS Software Corp.	c:\winnt\system32\dmserver.dll
winsta.dll	5.00.2195.2386	36.77 KB (37,648 bytes)	2/10/2003	5:30:17 PM	Microsoft Corporation	c:\winnt\system32\winsta.dll
lmhsvc.dll	5.00.2195.2778	9.77 KB (10,000 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\lmhsvc.dll
dnssrslvr.dll	5.00.2195.2778	88.77 KB (90,896 bytes)	2/10/2003	5:29:53 PM	Microsoft Corporation	c:\winnt\system32\dnssrslvr.dll
tapi32.dll	5.00.2182.1	123.27 KB (126,224 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\tapi32.dll
rasman.dll	5.00.2195.2780	54.77 KB (56,080 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\rasman.dll
rasapi32.dll	5.00.2195.2671	189.77 KB (194,320 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\rasapi32.dll
rtutils.dll	5.00.2168.1	43.77 KB (44,816 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\rtutils.dll
adslrpc.dll	5.00.2195.2842	127.27 KB (130,320 bytes)	2/10/2003	5:29:47 PM	Microsoft Corporation	c:\winnt\system32\adslrpc.dll
activeds.dll	5.00.2195.2778	174.77 KB (178,960 bytes)	2/10/2003	5:29:41 PM	Microsoft Corporation	c:\winnt\system32\activeds.dll
mprapi.dll	5.00.2181.1	79.27 KB (81,168 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\mprapi.dll
iphlpapi.dll	5.00.2173.2	67.77 KB (69,392 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\iphlpapi.dll
icmp.dll	5.00.2134.1	7.27 KB (7,440 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\icmp.dll
dhcpcsvc.dll	5.00.2195.2778	88.77 KB (90,896 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\dhcpcsvc.dll
eventlog.dll	5.00.2178.1	43.77 KB (44,816 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\eventlog.dll
ntdsapi.dll	5.00.2195.2661	55.77 KB (57,104 bytes)	2/10/2003	5:30:07 PM	Microsoft Corporation	c:\winnt\system32\ntdsapi.dll
scesrv.dll	5.00.2195.2780	226.27 KB (231,696 bytes)	2/10/2003	5:30:12 PM	Microsoft Corporation	c:\winnt\system32\scesrv.dll
umpnpmgr.dll	5.00.2182.1	86.27 KB (88,336 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\umpnpmgr.dll
services.exe	5.00.2195.2780	86.77 KB (88,848 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\services.exe
msv1_0.dll	5.00.2195.2900	111.77 KB (114,448 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\msv1_0.dll
clbcatq.dll	2000.2.3471.1	496.77 KB (508,688 bytes)	2/10/2003	5:29:50 PM	Microsoft Corporation	c:\winnt\system32\clbcatq.dll
oleaut32.dll	2.40.4517	612.27 KB (626,960 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\oleaut32.dll
csoui.dll	5.00.2195.2959	228.27 KB (233,744 bytes)	2/10/2003	5:29:51 PM	Microsoft Corporation	c:\winnt\system32\csoui.dll
winspool.drv	5.00.2195.2780	109.77 KB (112,400 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\winspool.drv
winscard.dll	5.00.2134.1	77.27 KB (79,120 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\wincard.dll
wlnotify.dll	5.00.2195.2780	53.77 KB (55,056 bytes)	2/10/2003	5:30:17 PM	Microsoft Corporation	c:\winnt\system32\wlnotify.dll
csddl.dll	5.00.2195.2401	98.27 KB (100,624 bytes)	2/10/2003	5:29:51 PM	Microsoft Corporation	c:\winnt\system32\csddl.dll
lz32.dll	5.00.2134.1	9.77 KB (10,000 bytes)	12/7/1999	7:00:00 AM	Microsoft Corporation	c:\winnt\system32\lz32.dll

version.dll	5.00.2134.1	15.77 KB (16,144 bytes)	12/7/1999	profmap.dll	5.00.2181.1	29.27 KB (29,968 bytes)	
7:00:00 AM	Microsoft Corporation			12/7/1999 7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\version.dll				c:\winnt\system32\profmap.dll			
rsaenh.dll	5.00.2195.2228	130.77 KB (133,904 bytes)	2/10/2003	secur32.dll	5.00.2195.2862	46.77 KB (47,888 bytes)	2/10/2003
5:31:00 PM	Microsoft Corporation			5:30:12 PM	Microsoft Corporation		
c:\winnt\system32\rsaenh.dll				c:\winnt\system32\secur32.dll			
mecat32.dll	5.131.2134.1	7.77 KB (7,952 bytes)	12/7/1999	sfc.dll	5.00.2195.2896	92.11 KB (94,320 bytes)	2/10/2003
7:00:00 AM	Microsoft Corporation			5:30:12 PM	Microsoft Corporation		
c:\winnt\system32\meat32.dll				c:\winnt\system32\sfc.dll			
ole32.dll	5.00.2195.2887	969.77 KB (993,040 bytes)	2/10/2003	nddeapi.dll	5.00.2137.1	15.27 KB (15,632 bytes)	12/7/1999
5:30:09 PM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\ole32.dll				c:\winnt\system32\nddeapi.dll			
imagehlp.dll	5.00.2195.2778	125.77 KB (128,784 bytes)		userenv.dll	5.00.2195.2780	361.77 KB (370,448 bytes)	12/7/1999
5/4/2001 1:05:02 PM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\imagehlp.dll				c:\winnt\system32\userenv.dll			
msasn1.dll	5.00.2134.1	51.27 KB (52,496 bytes)	12/7/1999	user32.dll	5.00.2195.2821	392.77 KB (402,192 bytes)	12/7/1999
7:00:00 AM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\msasn1.dll				c:\winnt\system32\user32.dll			
crypt32.dll	5.131.2195.2833	451.27 KB (462,096 bytes)	2/10/2003	gdi32.dll	5.00.2195.2778	228.77 KB (234,256 bytes)	12/7/1999
5:29:51 PM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\crypt32.dll				c:\winnt\system32\gdi32.dll			
wintrust.dll	5.131.2195.2779	162.27 KB (166,160 bytes)		rpert4.dll	5.00.2195.2832	437.27 KB (447,760 bytes)	2/10/2003
2/10/2003 5:30:17 PM	Microsoft Corporation			5:30:11 PM	Microsoft Corporation		
c:\winnt\system32\wintrust.dll				c:\winnt\system32\rpert4.dll			
setupapi.dll	5.00.2195.2663	555.77 KB (569,104 bytes)		advapi32.dll	5.00.2195.2867	351.77 KB (360,208 bytes)	
12/7/1999 7:00:00 AM	Microsoft Corporation			12/7/1999 7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\setupapi.dll				c:\winnt\system32\advapi32.dll			
winmm.dll	5.00.2161.1	184.77 KB (189,200 bytes)	12/7/1999	kernel32.dll	5.00.2195.2778	714.77 KB (731,920 bytes)	
7:00:00 AM	Microsoft Corporation			12/7/1999 7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\winmm.dll				c:\winnt\system32\kernel32.dll			
comctl32.dll	5.81	537.77 KB (550,672 bytes)	12/7/1999	msvcrt.dll	6.10.8924.0	284.05 KB (290,869 bytes)	5/4/2001
7:00:00 AM	Microsoft Corporation			1:05:02 PM	Microsoft Corporation		
c:\winnt\system32\comctl32.dll				c:\winnt\system32\msvcrt.dll			
shlwapi.dll	5.00.3315.1000	282.77 KB (289,552 bytes)	2/10/2003	winlogon.exe	5.00.2195.2953	173.77 KB (177,936 bytes)	
5:30:13 PM	Microsoft Corporation			12/7/1999 7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\shlwapi.dll				c:\winnt\system32\winlogon.exe			
shell32.dll	5.00.3315.2902	2.25 MB (2,359,056 bytes)	2/10/2003	sfefiles.dll	5.00.2195.2967	948.27 KB (971,024 bytes)	2/10/2003
5:30:13 PM	Microsoft Corporation			5:30:12 PM	Microsoft Corporation		
c:\winnt\system32\shell32.dll				c:\winnt\system32\sfefiles.dll			
msgina.dll	5.00.2195.2779	324.27 KB (332,048 bytes)	12/7/1999	ntdll.dll	5.00.2195.2779	478.77 KB (490,256 bytes)	5/4/2001
7:00:00 AM	Microsoft Corporation			1:05:02 PM	Microsoft Corporation		
c:\winnt\system32\msgina.dll				c:\winnt\system32\ntdll.dll			
wsock32.dll	5.00.2195.2871	21.27 KB (21,776 bytes)		smss.exe	5.00.2195.2901	44.27 KB (45,328 bytes)	12/7/1999
2/10/2003 5:30:17 PM	Microsoft Corporation			7:00:00 AM	Microsoft Corporation		
c:\winnt\system32\wsock32.dll				c:\winnt\system32\smss.exe			
dnsapi.dll	5.00.2195.2785	130.77 KB (133,904 bytes)	2/10/2003				
5:29:53 PM	Microsoft Corporation						
c:\winnt\system32\dnsapi.dll							
wldap32.dll	5.00.2195.2797	125.27 KB (128,272 bytes)					
2/10/2003 5:30:17 PM	Microsoft Corporation						
c:\winnt\system32\wldap32.dll							
ws2help.dll	5.00.2134.1	17.77 KB (18,192 bytes)					
12/7/1999 7:00:00 AM	Microsoft Corporation						
c:\winnt\system32\ws2help.dll							
ws2_32.dll	5.00.2195.2780	67.77 KB (69,392 bytes)	2/10/2003				
5:30:17 PM	Microsoft Corporation						
c:\winnt\system32\ws2_32.dll							
samlib.dll	5.00.2195.2780	49.77 KB (50,960 bytes)	12/7/1999				
7:00:00 AM	Microsoft Corporation						
c:\winnt\system32\samlib.dll							
netrap.dll	5.00.2134.1	11.27 KB (11,536 bytes)	12/7/1999				
7:00:00 AM	Microsoft Corporation						
c:\winnt\system32\netrap.dll							
netapi32.dll	5.00.2195.2808	303.77 KB (311,056 bytes)					
2/10/2003 5:30:06 PM	Microsoft Corporation						
c:\winnt\system32\netapi32.dll							

[Services]

Display Name	Name	State	Start	Mode	Service Type
Path	Error Control	Running	Auto	Share	Process
Alerter	Alerter	Running	Auto	Share	Process
c:\winnt\system32\services.exe	Normal	LocalSystem	0		
Application Management	AppMgmt	Stopped	Manual	Share	
Process	c:\winnt\system32\services.exe	Normal	LocalSystem	0	
Computer Browser	Browser	Running	Auto	Share	Process
c:\winnt\system32\services.exe	Normal	LocalSystem	0		
Indexing Service	cisvc	Stopped	Manual	Share	Process
c:\winnt\system32\cisvc.exe	Normal	LocalSystem	0		
ClipBook	ClipSrv	Stopped	Manual	Own	Process
c:\winnt\system32\clipsrv.exe	Normal	LocalSystem	0		
Distributed File System	Dfs	Running	Auto	Own	
Process	c:\winnt\system32\dfssvc.exe	Normal	LocalSystem	0	
DHCP Client	Dhcp	Running	Auto	Share	Process
c:\winnt\system32\services.exe	Normal	LocalSystem	0		
Logical Disk Manager Administrative Service	dmadmin	Stopped			
Manual	Share Process	c:\winnt\system32\dmadmin.exe	/com		
Normal	LocalSystem	0			

Accessories\Accessibility Default User:Accessories\Accessibility
 Default User
 Accessories\Entertainment Default User:Accessories\Entertainment
 Default User
 Accessories\System Tools Default User:Accessories\System Tools
 Default User
 Startup Default User:Startup Default User
 Accessories All Users:Accessories All Users
 Accessories\Accessibility All Users:Accessories\Accessibility
 All Users
 Accessories\Communications All Users:Accessories\Communications
 All Users
 Accessories\Entertainment All Users:Accessories\Entertainment
 All Users
 Accessories\Games All Users:Accessories\Games All Users
 Accessories\Microsoft Script Debugger All Users:Accessories\Microsoft
 Script Debugger All Users
 Accessories\System Tools All Users:Accessories\System Tools
 All Users
 Administrative Tools All Users:Administrative Tools All Users
 Microsoft SQL Server All Users:Microsoft SQL Server All Users
 Startup All Users:Startup All Users
 Accessories CLIENT10\Administrator:Accessories
 CLIENT10\Administrator
 Accessories\Accessibility
 CLIENT10\Administrator:Accessories\Accessibility
 CLIENT10\Administrator
 Accessories\Entertainment
 CLIENT10\Administrator:Accessories\Entertainment
 CLIENT10\Administrator
 Accessories\System Tools CLIENT10\Administrator:Accessories\System
 Tools CLIENT10\Administrator
 Administrative Tools CLIENT10\Administrator:Administrative Tools
 CLIENT10\Administrator
 Startup CLIENT10\Administrator:Startup
 CLIENT10\Administrator

[Startup Programs]

Program	Command	User Name	Location
No startup program information			

[OLE Registration]

Object	Local Server
Sound (OLE2)	sndrec32.exe
Media Clip	mplay32.exe
Video Clip	mplay32.exe /avi
MIDI Sequence	mplay32.exe /mid
Sound	Not Available
Media Clip	Not Available
Image Document	"C:\Program Files\Windows NT\Accessories\ImageVue\KodakImg.exe"
WordPad Document	"%ProgramFiles%\Windows NT\Accessories\WORDPAD.EXE"
Windows Media Services DRM Storage object	Not Available
Bitmap Image	mspaint.exe

[Internet Explorer 5]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Version	5.00.3315.1000
Build	53315.1000
Product ID	51876-270-8956491-05798

Application Path	C:\Program Files\Internet Explorer
Language	English (United States)
Active Printer	Not Available
Cipher Strength	168-bit
Content Advisor	Disabled
IEAK Install	No

[File Versions]

File	Version	Size	Date	Path	Company
advapi32.dll	5.0.2195.2867	352 KB		C:\WINNT\system32	Microsoft Corporation
advpack.dll	5.0.3103.1000	87 KB		C:\WINNT\system32	Microsoft Corporation
browseui.dll	5.0.3315.2846	35 KB		C:\WINNT\system32	Microsoft Corporation
browseui.dll	5.0.3315.2846	789 KB		C:\WINNT\system32	Microsoft Corporation
ckcnv.exe	5.0.2189.1	9 KB	12/7/1999 7:00:00 AM	C:\WINNT\system32	Microsoft Corporation
comctl32.dll	5.81.3103.1000	538 KB		C:\WINNT\system32	Microsoft Corporation
crypt32.dll	5.131.2195.2833	451 KB		C:\WINNT\system32	Microsoft Corporation
enhshg.dll	<File Missing>				Not Available
iemigrat.dll	<File Missing>				Not Available
iesetup.dll	5.0.3103.1000	57 KB		C:\WINNT\system32	Microsoft Corporation
iexplore.exe	5.0.2920.0	59 KB	12/7/1999 7:00:00 AM	C:\Program Files\Internet Explorer	Microsoft Corporation
imagehlp.dll	5.0.2195.2778	126 KB		C:\WINNT\system32	Microsoft Corporation
imghelp.dll	<File Missing>				Not Available
inseng.dll	5.0.3103.1000	72 KB		C:\WINNT\system32	Microsoft Corporation
jobexec.dll	5.0.0.1	47 KB	12/7/1999 7:00:00 AM	C:\WINNT\system32	Microsoft Corporation
jscrip.dll	5.1.0.5907	476 KB		C:\WINNT\system32	Microsoft Corporation
jsproxy.dll	5.0.2920.0	13 KB	12/7/1999 7:00:00 AM	C:\WINNT\system32	Microsoft Corporation
msaahtml.dll	<File Missing>				Not Available
mshtml.dll	5.0.3315.2870	2290 KB		C:\WINNT\system32	Microsoft Corporation
msjava.dll	5.0.3802.0	923 KB		C:\WINNT\system32	Microsoft Corporation
msoss.dll	<File Missing>				Not Available
msxml.dll	8.0.5718.1	493 KB		C:\WINNT\system32	Microsoft Corporation
occache.dll	5.0.3103.1000	86 KB		C:\WINNT\system32	Microsoft Corporation
ole32.dll	5.0.2195.2887	970 KB		C:\WINNT\system32	Microsoft Corporation
oleaut32.dll	2.40.4517.0	612 KB		C:\WINNT\system32	Microsoft Corporation
olepro32.dll	5.0.4517.0	160 KB		C:\WINNT\system32	Microsoft Corporation
rsabase.dll	5.0.2195.2228	128 KB		C:\WINNT\system32	Microsoft Corporation
rsaenh.dll	5.0.2195.2228	131 KB		C:\WINNT\system32	Microsoft Corporation

rsapi32.dll	<File Missing>	Not Available	Not Available
Not Available	Not Available		
rsasig.dll	<File Missing>	Not Available	Not Available
Not Available	Not Available		
schannel.dll	5.1.2195.0	138 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
shdoc401.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	
shdocvw.dll	5.0.3315.2879	1078 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
shell32.dll	5.0.3315.2902	2304 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
shlwapi.dll	5.0.3315.1000	283 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
url.dll	5.0.2920.0	82 KB	12/7/1999 7:00:00 AM
C:\WINNT\system32	Microsoft Corporation		
urlmon.dll	5.0.3315.1000	441 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
vbscript.dll	5.1.0.5907	428 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
webcheck.dll	5.0.3315.1000	252 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
win.com	5.0.2134.1	24 KB	12/7/1999 7:00:00 AM
C:\WINNT\system32	Microsoft Corporation		
wininet.dll	5.0.3315.1000	457 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
winsock.dll	3.10.0.103	3 KB	12/7/1999 7:00:00 AM
C:\WINNT\system32	Microsoft Corporation		
wintrust.dll	5.131.2195.2779	162 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
wsock.vxd	<File Missing>	Not Available	Not Available
Not Available	Not Available		
wsock32.dll	5.0.2195.2871	21 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
wsock32n.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	

[Connectivity]

Item	Value	
Connection Preference		Never dial
EnableHttp1.1	1	
ProxyHttp1.1	0	

LAN Settings

AutoConfigProxy	wininet.dll
AutoProxyDetectMode	Enabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\Administrator\Local Settings\Temporary Internet Files
Total Disk Space	17351 MB
Available Disk Space	14248 MB
Maximum Cache Size	542 MB
Available Cache Size	542 MB

[List of Objects]

Program File	Status	CodeBase
No cached object information available		

[Content]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Content Advisor	Disabled

[Personal Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
Administrator	Administrator			2/10/2003 to 1/17/2103 sha1RSA

[Other People Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
No other people certificate information available				

[Publishers]

Name	
No publisher information available	

[Security]

Zone	Security Level
Local intranet	Medium-low
Trusted sites	Low
Internet	Medium
Restricted sites	High

Client Configuration Parameters

Client Configuration Parameters

COM+ Settings

TPCC.AllTxns:
 Activation:
 Enable Object Pooling selected
 Minimum Pool Size: 190
 Maximum Pool Size: 190
 Creating Timeout: 60,000
 Enable Object Construction
 Enable Just in Time Activation
 Concurrency:
 Concurrency Required

TPCC Application Registry Parameters

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC]
"Path"="c:\inetpub\wwwroot\"
"NumberOfDeliveryThreads"=dword:0x16
"MaxConnections"=dword:0x55f0
"MaxPendingDeliveries"=dword:0x898
"DB_Protocol"="ODBC"
"TxnMonitor"="COM"
"DbServer"="ibmsrvr3"
"DbName"="tpcc"
"DbUser"="sa"
```


"DbPassword"=""
"COM_SinglePool"="YES"

Microsoft Internet Information Service Registry Parameters

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\inetInfo]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\inetInfo\Parameters]

"ListenBackLog"=dword:0x19
"DispatchEntries"=hex(7):4c,00,44,00,41,00,50,00,53,00,56,00,43,00,00,00,00
"PoolThreadLimit"=dword:0xbe
"ThreadTimeout"=dword:0x15180

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\inetInfo\Performance]

"Library"="infoctrs.dll"
"Open"="OpenINFOPerformanceData"
"Close"="CloseINFOPerformanceData"
"Collect"="CollectINFOPerformanceData"
"Last Counter"=dword:0x842
"Last Help"=dword:0x843
"First Counter"=dword:0x802

World Wide Web Service Registry Parameters

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC]

"Type"=dword:0x20
"Start"=dword:0x2
"ErrorControl"=dword:0x1
"ImagePath"=hex(2):43,00,3a,00,5c,00,57,00,49,00,4e,00,4e,00,54,00,5c,00,53,00,79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,69,00,6e,00,65,00,74,00,73,00,07,00,76,00,5c,00,69,00,6e,00,65,00,74,00,69,00,6e,00,66,00,6f,00,2e,00,65,00,78,00,65,00,00,00
"DisplayName"="World Wide Web Publishing Service"
"DependOnService"=hex(7):49,00,49,00,53,00,41,00,44,00,4d,00,49,00,4e,00,00,00,00,00
"DependOnGroup"=hex(7):00,00
"ObjectName"="LocalSystem"
"Description"="Provides Web connectivity and administration through the Internet Information Services snap-in."

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP]

"NOTE"="This is for backward compatibility only."

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP\Parameters]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters]

"MajorVersion"=dword:00000005
"MinorVersion"=dword:00000000
"InstallPath"="C:\\WINNT\\System32\\inetrv"
"CertMapList"="C:\\WINNT\\System32\\inetrv\\iisrmap.dll"
"AccessDeniedMessage"="Error: Access is Denied."
"Filter DLLs"=""
"LogFileDirectory"="C:\\WINNT\\System32\\LogFiles"
"AcceptExOutstanding"=dword:00000028

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Script Map]

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Virtual Roots]

"/"="c:\\inetpub\\wwwroot,,205"
"/Scripts"="c:\\inetpub\\scripts,,1"
"/IISAdmin"="C:\\WINNT\\System32\\inetrv\\iisadmin,,1"
"/IISSamples"="c:\\inetpub\\iissamples,,1"
"/MSADC"="c:\\program files\\common files\\system\\msadc,,1"
"/IISHelp"="c:\\winnt\\help\\iishelp,,1"
"/_vti_bin"="C:\\Program Files\\Common Files\\Microsoft Shared\\Web Server Extensions\\40\\isapi,,1"
"/Rpc"="C:\\WINNT\\System32\\RpcProxy,,1"
"/Printers"="C:\\WINNT\\web\\printers,,201"

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance]

"Library"="w3ctrs.dll"
"Open"="OpenW3PerformanceData"
"Close"="CloseW3PerformanceData"
"Collect"="CollectW3PerformanceData"
"Last Counter"=dword:000008f2
"Last Help"=dword:000008f3
"First Counter"=dword:00000850
"First Help"=dword:00000851

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security]

"Security"=hex:01,00,14,80,a0,00,00,00,ac,00,00,00,14,00,00,00,30,00,00,00,02,00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00,00,00,00,01,00,00,00,00,02,00,70,00,04,00,00,00,00,18,00,fd,01,02,00,01,01,00,00,00,00,05,12,00,00,00,74,00,6f,00,00,00,1c,00,ff,01,0f,00,01,02,00,00,00,00,05,20,00,00,00,20,02,00,00,72,00,73,00,00,00,18,00,8d,01,02,00,01,01,00,00,00,00,05,0b,00,00,00,20,02,00,00,00,1c,00,fd,01,02,00,01,02,00,00,00,00,05,20,00,00,00,23,02,00,00,72,00,73,00,01,01,00,00,00,00,05,12,00,00,00,01,01,00,00,00,00,05,12,00,00,00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Enum]

"0"="Root\\LEGACY_W3SVC\\0000"
"Count"=dword:00000001
"NextInstance"=dword:00000001

RTE Input Parameters

Profile: 4096wh_32rte
File Path: C:\Program Files\BenchCraft\4096wh_32rte.pro
Version: 3

Number of Engines: 32

Name: rte111
Description: rte111
Directory: c:\rte\logs\rte111.log
Machine: rtes2
Parameter Set: PARAM2
Index: 0
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER11571562

Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte112
Description: rte112
Directory: c:\rtelogs\rte112.log
Machine: rtes2
Parameter Set: PARAM2
Index: 3000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER25384421
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte113
Description: rte113
Directory: c:\rtelogs\rte113.log
Machine: rtes2
Parameter Set: PARAM2
Index: 6000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER35434750
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 2

Name: rte114
Description: rte114
Directory: c:\rtelogs\rte114.log
Machine: rtes2
Parameter Set: PARAM2
Index: 9000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER45470859
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 3

Name: rte121
Description: rte121
Directory: c:\rtelogs\rte121.log
Machine: rtes2
Parameter Set: PARAM2
Index: 15000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER55546265
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10

CLIENT_NURAND: 233
CPU: 0

Name: rte122
Description: rte122
Directory: c:\rtelogs\rte122.log
Machine: rtes2
Parameter Set: PARAM2
Index: 18000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER65583640
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte123
Description: rte123
Directory: c:\rtelogs\rte123.log
Machine: rtes2
Parameter Set: PARAM2
Index: 21000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER75623609
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 2

Name: rte124
Description: rte124
Directory: c:\rtelogs\rte124.log
Machine: rtes2
Parameter Set: PARAM2
Index: 24000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER85670968
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 3

Name: rte132
Description: rte132
Directory: c:\rtelogs\rte132.log
Machine: frte90
Parameter Set: PARAM2
Index: 27000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER95713843
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte133

Description: rte133
Directory: c:\rtelogs\rte133.log
Machine: frte90
Parameter Set: PARAM2
Index: 30000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER105754984
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte134
Description: rte134
Directory: c:\rtelogs\rte134.log
Machine: frte90
Parameter Set: PARAM2
Index: 33000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER115821125
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte211
Description: rte211
Directory: c:\rtelogs\rte211.log
Machine: rtes2
Parameter Set: PARAM2
Index: 36000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER125893515
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte212
Description: rte212
Directory: c:\rtelogs\rte212.log
Machine: rtes2
Parameter Set: PARAM2
Index: 39000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER135953109
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte213
Description: rte213
Directory: c:\rtelogs\rte213.log
Machine: rtes2
Parameter Set: PARAM2

Index: 42000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER145993203
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 2

Name: rte214
Description: rte214
Directory: c:\rtelogs\rte214.log
Machine: rtes2
Parameter Set: PARAM2
Index: 45000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER156057359
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 3

Name: rte221
Description: rte221
Directory: c:\rtelogs\rte221.log
Machine: rtes2
Parameter Set: PARAM2
Index: 48000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER166118968
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte222
Description: rte222
Directory: c:\rtelogs\rte222.log
Machine: rtes2
Parameter Set: PARAM2
Index: 51000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER176154750
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte223
Description: rte223
Directory: c:\rtelogs\rte223.log
Machine: rtes2
Parameter Set: PARAM2
Index: 54000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER186184031

Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 2

Name: rte224
Description: rte224
Directory: c:\rtelogs\rte224.log
Machine: rtes2
Parameter Set: PARAM2
Index: 57000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER196216140
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 3

Name: rte232
Description: rte232
Directory: c:\rtelogs\rte232.log
Machine: rtes2
Parameter Set: PARAM2
Index: 60000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER206319515
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte233
Description: rte233
Directory: c:\rtelogs\rte233.log
Machine: rtes2
Parameter Set: PARAM2
Index: 63000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER216374171
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte234
Description: rte234
Directory: c:\rtelogs\rte234.log
Machine: rtes2
Parameter Set: PARAM2
Index: 66000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER226408734
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10

CLIENT_NURAND: 233
CPU: 2

Name: rte135
Description: rte135
Directory: c:\rtelogs\rte135.log
Machine: frte90
Parameter Set: PARAM2
Index: 72000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER2568868468
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte141
Description: rte141
Directory: c:\rtelogs\rte141.log
Machine: frte90
Parameter Set: PARAM2
Index: 75000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER2668925937
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte142
Description: rte142
Directory: c:\rtelogs\rte142.log
Machine: frte90
Parameter Set: PARAM2
Index: 78000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER2768987671
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte143
Description: rte143
Directory: c:\rtelogs\rte143.log
Machine: frte90
Parameter Set: PARAM2
Index: 81000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER2869074843
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte144

Description: rte144
Directory: c:\rtelogs\rte144.log
Machine: frte90
Parameter Set: PARAM2
Index: 84000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER2969145625
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte231
Description: rte231
Directory: c:\rtelogs\rte231.log
Machine: frte90
Parameter Set: PARAM2
Index: 90000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER3169273125
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte241
Description: rte241
Directory: c:\rtelogs\rte241.log
Machine: frte90
Parameter Set: PARAM2
Index: 96000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER3369433515
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte242
Description: rte242
Directory: c:\rtelogs\rte242.log
Machine: frte90
Parameter Set: PARAM2
Index: 99000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER3469509140
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: rte243
Description: rte243
Directory: c:\rtelogs\rte243.log
Machine: frte90
Parameter Set: PARAM2

Index: 102000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER3569556140
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: rte244
Description: rte244
Directory: c:\rtelogs\rte244.log
Machine: frte90
Parameter Set: PARAM2
Index: 105000000
Seed: 25744
Configured Users: 1280
Pipe Name: DRIVER3669595937
Connect Rate: 300
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Number of User groups: 32

Driver Engine: rte111
IIS Server: client11
SQL Server: ibmsvr3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1 - 128
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte112
IIS Server: client11
SQL Server: ibmsvr3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 129 - 256
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte113
IIS Server: client11
SQL Server: ibmsvr3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 257 - 384
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280

District id: 1
Scale Down: No

Driver Engine: rte114
IIS Server: client11
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 385 - 512
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte121
IIS Server: client12
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 513 - 640
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte122
IIS Server: client12
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 641 - 768
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte123
IIS Server: client12
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 769 - 896
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte124
IIS Server: client12
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 897 - 1024
w_id Min Warehouse: 1
w_id Max Warehouse: 4096

Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte132
IIS Server: client13
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1025 - 1152
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte133
IIS Server: client13
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1153 - 1280
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte134
IIS Server: client13
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1281 - 1408
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte135
IIS Server: client13
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1409 - 1536
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte141
IIS Server: client14
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1537 - 1664

w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte142
IIS Server: client14
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1665 - 1792
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte143
IIS Server: client14
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1793 - 1920
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte144
IIS Server: client14
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1921 - 2048
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte211
IIS Server: client21
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2049 - 2176
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte212
IIS Server: client21
SQL Server: ibmserver3
Database: tpcc
User: sa

Protocol: HTML
w_id Range: 2177 - 2304
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte213
IIS Server: client21
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2305 - 2432
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte214
IIS Server: client21
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2433 - 2560
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte221
IIS Server: client22
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2561 - 2688
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte222
IIS Server: client22
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2689 - 2816
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte223
IIS Server: client22
SQL Server: ibmserver3

Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2817 - 2944
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte224
IIS Server: client22
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2945 - 3072
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte231
IIS Server: client23
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3073 - 3200
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte232
IIS Server: client23
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3201 - 3328
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte233
IIS Server: client23
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3329 - 3456
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte234

IIS Server: client23
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3457 - 3584
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte241
IIS Server: client24
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3585 - 3712
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte242
IIS Server: client24
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3713 - 3840
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte243
IIS Server: client24
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3841 - 3968
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Driver Engine: rte244
IIS Server: client24
SQL Server: ibmserver3
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3969 - 4096
w_id Min Warehouse: 1
w_id Max Warehouse: 4096
Scale: Normal
User Count: 1280
District id: 1
Scale Down: No

Number of Parameter Sets: 2

~Default

Default Parameter Set

		Txn	Think	Key	RT	RT	Menu
		Weight	Time	Time	Delay	Fence	Delay
5.00	0.10	New Order	10.00	12.05	18.01	0.10	
5.00	0.10	Payment	10.00	12.05	3.01	0.10	
5.00	0.10	Delivery	1.00	5.05	2.01	0.10	
20.00	0.10	Stock Level	1.00	5.05	2.01	0.10	
5.00	0.10	Order Status	1.00	10.05	2.01	0.10	

PARAM2

Performance parameters

		Txn	Think	Key	RT	RT	Menu
		Weight	Time	Time	Delay	Fence	Delay
5.00	0.10	New Order	10.00	12.05	18.01	0.10	
5.00	0.10	Payment	9.61	12.05	3.01	0.10	
5.00	0.10	Delivery	0.90	5.05	2.01	0.10	
20.00	0.10	Stock Level	0.90	5.05	2.01	0.10	
5.00	0.10	Order Status	0.90	10.05	2.01	0.10	

Appendix D: 60-Day Space

TPC-C 60-Day Space Requirements						
Warehouses	4,096				tpmC	50,666.11
Table	Rows	Data KB	Index KB	Extra 5% KB	8HR Space	Total Space KB
Warehouse	4,096	440	16	22.80		478.80
District	40,960	4,552	16	228.40		4,796.40
Item	100,000	9,528	32	478.00		10,038.00
New-Order	36,864,000	582,832	1,336		327,680.00	911,848.00
History	122,880,000	6,826,680	16		1,351,102.07	8,177,798.07
Orders	122,880,000	3,766,440	7,672		746,951.46	4,521,063.46
Customer	122,880,000	89,367,280	5,328,840	4,734,806.00		99,430,926.00
Order-Line	1,228,800,741	76,800,048	162,552		15,232,013.90	92,194,613.90
Stock	409,600,000	131,072,000	244,856	6,565,842.80		137,882,698.80
Totals		308,429,800	5,745,336	11,301,378.00	17,657,747.43	343,134,261.43
Segment	LogDev Cnt.	Segment Size	Needed	Overhead		Not Needed
misc	1	133,120,000	105,820,637	1,058,206		26,241,157.01
big	4	266,240,000	237,313,625	2,373,136		26,553,238.95
master, msdb,model	1	13,312	13,312			-
tpcc_root	1	8,192	8,192			-
tempdb	1	8,704	8,704			-
Totals		399,390,208.00	343,164,469.43	3,431,342.61		52,794,395.96
Dynamic Space	87,393,168.00	Sum of Data for Order, Order-Line and History				
Static Space	241,514,688.61	Data + Index + 5% Space + Overhead - Dynamic Space				
Free Space	17,687,955.43	Total Segment Size - Dynamic Space - Static Space - Not needed				
Daily Growth	17,296,374.47	(Dynamic Space/W * 62.5) * tpmC				
Daily Spread	(8,256,606.27)	Free Space - 1.5 * Daily Growth (Zero If Negative)				
60-Day Space (KB)	1,279,297,156.54	Static Space + 60 (Daily Growth + Daily Spread)				
60-Day Space (GB)	1,220.03	60-Day Space in GB (Excludes OS,Paging and RDBMS Logs)				
Available (GB)	3,555.30	Total storage configured and available for database, minus logs, in RAID-0 configuration.				
Log File Storage Requirement						
Log Size (MB)	120,000.00	Total Size of Log File				
% Log Used	28.7176	% of Log File Used During Entire Run				
Total N-O Txn	7,670,919.00	Total Count of New-Order Transactions during Entire Run				
Log / N-O Txn	4.60	KB of Log per New-Order Transaction				
8-Hour Log (GB)	106.69	8 Hours of Log in GB (Excluding Space for Redundancy)				
Log Configured (GB)	135.44					
Disk Capacity	MB	GB				
18.2GB-10K rpm	17,736	16.93				
36.4GB-10K rpm	35,472	33.86				
Space Usage	GB Needed		Disks Priced	Disk Size	GB Priced	GB Usable
60-Day (RAID-0)	1,220.03		210	18.2GB-10K rpm	3,555.30	3,555.30
Total DB						3,555.30
8-Hour Log (RAID-1)	106.69		8	36.4GB-10K rpm	270.88	135.44
Total Log						135.44
OS, SQL Server	4.00		1	18.2GB-10K rpm	16.93	16.93
Total Space	1,330.73		219		3,843.11	3,707.67

Appendix E: Third-Party Quotations

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>

Microsoft

February 25, 2003

IBM Corporation
Chris King
3039 Cornwallis Road
Research Triangle Park,
NC 27709

Ms. King:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-00846	SQL Server 2000 Enterprise Edition <i>Per processor licensing</i> <i>Discount Schedule: Open Program Level C</i> <i>Unit Price reflects a 17% discount from the retail unit price of \$19,999.</i>	\$16,541	4	\$66,164
C11-00821	Windows 2000 Server <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 8% discount from the retail unit price of \$799.</i>	\$738	2	\$1,476
N/A	Windows Server 2003, Enterprise Server <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 18% discount from the retail unit price of \$3,299.</i>	\$2,699	1	\$2,699
254-00170	Visual C++ Standard <i>No discounts applied</i>	\$109	1	\$109
PRO-PRORS-16U-01	Database Server Support Package <i>1 Year Term</i>	\$1,950	3	\$5,850

Some products may not be currently orderable but will be available through Microsoft's normal distribution channels by February 28, 2003.


Prices for the Microsoft Windows .Net products are considered Not to Exceed pricing. Actual prices will be announced when the Microsoft .Net products are available.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PCchki0325023832

Please include this Reference ID in any correspondence regarding this price quote.



COMPUTER GIANTS
Servicing the High-end Storage Market.








HOME LOG IN CART CHECKOUT CONTACT HELP

Customer Reviews (NE)
Submit your review here

search By Keyword or Part# GO search By Manufacturer

Track Your Package

- LOG ON >>
- Contract It
GSA GS-35F-0171M
- CABLES
 - COMPAQ
 - DISK CONTROLLER
 - DVD-RW
 - ENCLOSURES
 - FLASH DEVICES
 - HARD DRIVES
 - HEWLETT PACKARD
 - IBM - SERVERS
 - LIBRARIES/ARRAYS
 - MAGNETO OPTICAL
 - MOTHERBOARD
 - MULTIMEDIA
 - NAS STORAGE
 - NETWORKING
 - NOTEBOOK DRIVES
 - PC PARTS
 - PORTABLES
 - POWER PROTECTION
 - SERVERS
 - SOFTWARE
 - STORAGE COUNTRY
 - SUN
 - TAPE AUTOLOADERS
 - TAPE_DRIVES
 - TAPE_MEDIA
 - VIDEO CARD
 - VIDEO DISPLAYS
 - VIDEO EDITING
 - KINGSTON_MEMORY

Product Info		Price	QTY	A
FS108NA	NETGEAR FS108 10/100 8PT DS SWCH-W/ UP	\$65.00	<input type="text" value="1"/>	
Get Details / Accessories	More Like This	Mfgr Page		
EZXS88W	EZXS88W ETHERFAST 8PORT 10/100BTX AUTO-SENS SWITCH DESKTOP	\$75.00	<input type="text" value="1"/>	
Get Details / Accessories	More Like This	Mfgr Page		
SVIEW08	8PORT PROCONNECT KVM CONSOLE SWITCH	\$218.50	<input type="text" value="1"/>	
Get Details / Accessories	More Like This	Mfgr Page		
J4898A	PROCURVE SWITCH 2708 UNMANAGED 8PORT RJ45 10/100/1000	\$710.00	<input type="text" value="1"/>	
Get Details / Accessories	More Like This	Mfgr Page		
EG0008	ETHERFAST 8PORT GIGA SWITCH 10/100/1000	\$798.00	<input type="text" value="1"/>	
Get Details / Accessories	More Like This	Mfgr Page		
3C16828	3COM - SWITCHES AND HUBS SWITCH 4005 8PORT 10/100BTX .	\$1,090.00	<input type="text" value="1"/>	
Get Details / Accessories	More Like This	Mfgr Page		
J4902A	PROCURVE 6108 8PORT MANAGED SWITCH 10/100/1000 2-FIBER/8-COPPER	\$1,690.00	<input type="text" value="1"/>	
Get Details / Accessories	More Like This	Mfgr Page		