



TPC Benchmark™ C
Full Disclosure Report

NEC Express5800/1320Xc (32 SMP)

**Using Microsoft® Windows® Server 2003, Datacenter Edition
for 64-bit Itanium-based Systems
and
Microsoft® SQL Server™ 2000, Enterprise Edition (64-bit)**

**First Edition
Submitted for Review
February 20, 2003**

NEC, the Sponsor of this benchmark test, believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. The Sponsor assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the Sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark™ C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. NEC does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2003 NEC Corporation.

All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in USA, 2003

NEC and Express5800 are registered trademarks of NEC Corporation.

TPC Benchmark, TPC-C and tpmC are trademarks of the Transaction Processing Performance Council.

Microsoft®, Windows® Server 2003 and SQL Server™ 2000 are registered trademarks and trademark of Microsoft® Corporation.

Intel®, and Itanium® are registered trademarks of Intel® Corporation.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.



NEC Express5800/1320Xc

C/S with Express5800/120Re-2

TPC-C Rev.5.1
Reported Date
Feb 20, 2003

Total System Cost

TPC-C Throughput

Price/Performance

Availability Date

\$5,619,528

433,107.77 tpmC

\$12.98 per tpmC

June 30, 2003

Processors

Database Manager

Operating System

Other Software

Number of Users


32 Intel® Itanium® 2 1GHz
for Server
46 Intel® Xeon™ 1.80GHz for
Client

Microsoft®
SQL Server™ 2000
Enterprise Edition(64-bit)

Microsoft®
Windows® Server 2003,
Datacenter Edition for 64-bit
Itanium-based Systems

Windows® 2000 Server
Microsoft® VC++
Microsoft® COM+

360,000

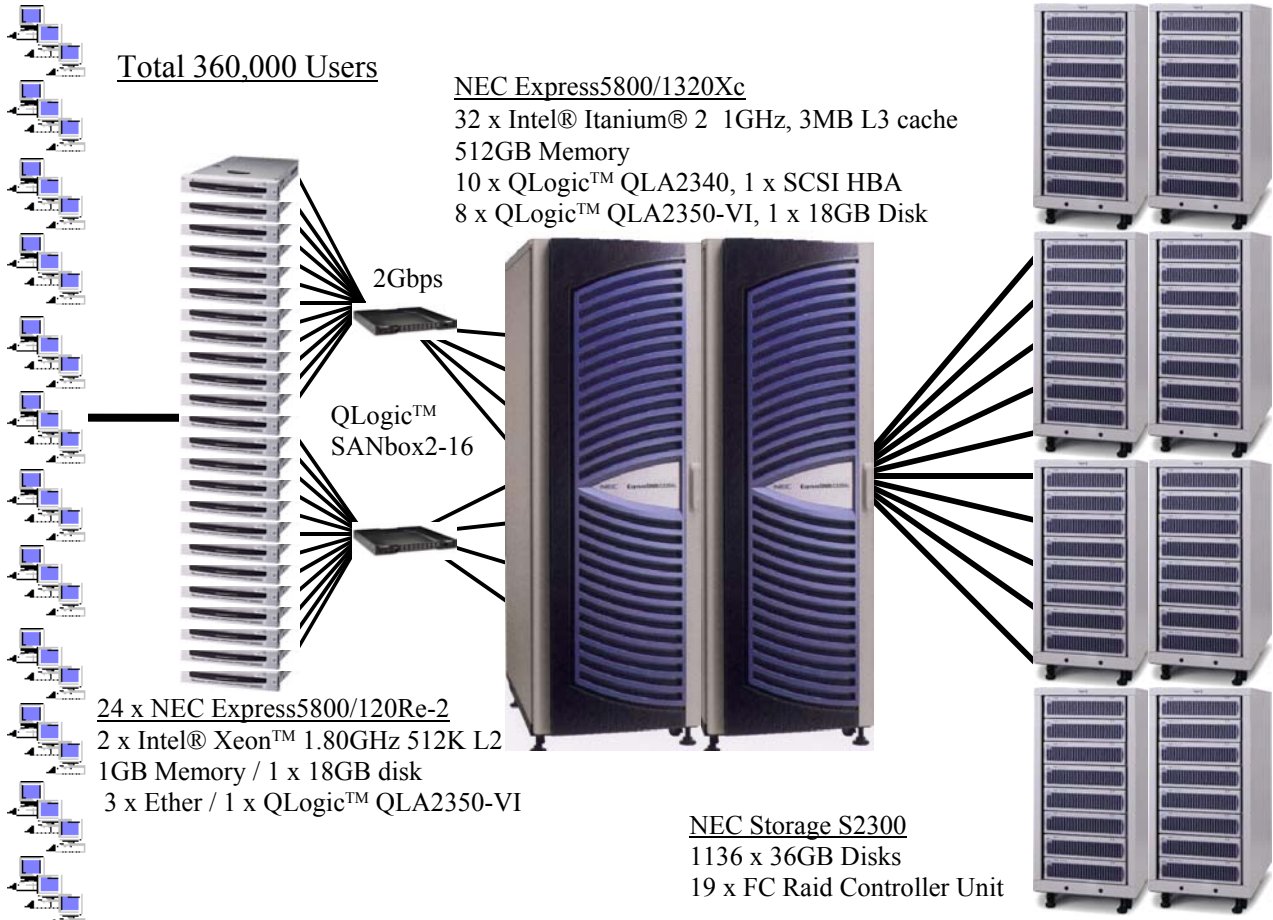

System Component	Server		Each Client	
Processors	32	Intel® Itanium® 2 1GHz	2	Intel® Xeon™ 1.80GHz
Cache		3MB L3 Cache		512KB L2 Cache
Memory		2 GB x 256		512MB x 2
Disk Controllers	10 1	QLogic™ QLA2340 SCSI HBA	1	On-board SCSI
Disk Drives	1 1136	18GB (16.6GB Usable) 36GB (33.2GB Usable)	1	18GB
Total Storage		40,914GB		18GB
Others	1 1 8	DVD-ROM Drive 1Gbps Ether NIC QLogic™ QLA2350-VI 2Gb NIC	1 2 1 1	CD-ROM Drive On-board Ether controller 100Mbps Ether NIC QLogic™ QLA2350-VI 2Gb NIC

NEC	NEC Express5800/1320Xc C/S with Express5800/120Re-2		TPC-C REV 5.1				
	Report Date:		02/20/03				
Description	Part Number	Third Party Brand	Unit Pricing	Price	Qty	Extended Price	3-yr Mnt. Price
Server Hardware							
Express5800/1320Xc system	850200010	NEC	1	2,126,090	1	2,126,090	1,158,910
Base Original 32	Included	NEC	1	-	1	-	-
Cell Card Original	Included	NEC	1	-	8	-	-
CPU(1GHz/3MB)	Included	NEC	1	-	32	-	-
Memory(8GB)	Included	NEC	1	-	64	-	-
Base PCI Box	Included	NEC	1	-	3	-	-
Core PCI Box(Windows Model)	Included	NEC	1	-	1	-	-
PCI Cable(2.5m)	Included	NEC	1	-	6	-	-
PCI Cable(3.0m)	Included	NEC	1	-	2	-	-
Expansion Cabinet	Included	NEC	1	-	1	-	-
18GB 10K rpm HDD	Included	NEC	1	-	1	-	-
Gbit Ether NIC	Included	NEC	1	-	1	-	-
Mouse/Keyboard	Included	NEC	1	-	1	-	-
SCSI HBA with VHDCI cables	Included	NEC	1	-	1	-	-
Windows Server 2003, Datacenter Edition	Included	NEC	1	-	1	-	-
NEC Express5800/120Re-2 (for System Maintenance)							
Base System with 1 x Xeon Processor 1.8GHz/512KB	850162001	NEC	1	2,859	1	2,859	-
1 x Xeon Processor 1.8GHz/512KB BTO Option,	062-02163-000	NEC	1	399	1	399	-
1GB(2 x 512MB) DDR200 SDRAM memory,	062-02168-000	NEC	1	599	1	599	-
1 x 18.2GB 10K rpm Ultra160 HDD,	062-02011-000	NEC	1	329	1	329	-
CD-ROM, 2 x On-board LAN, KB/MS	Included	NEC	1	-	1	-	-
3 years of warranty service to 4-hour response, 7x24	WG-0000-1095-7244	NEC	1	1,399	1	-	1,399
NEC AccuSync50M-BK (15" monitor)	AS50M-BK	NEC	3	128	2	256	-
FC HBA QLA2340 (+2 spares)	QLA2340-CK	QLogic	3	1,319	12	15,833	-
FC Adapter QLA2350 (+2 spares)	QLA2350	QLogic	4	2,095	11	23,045	-
FC Cable 10MLC-LC (+2 spares)	062-02304-000	NEC	1	200	11	2,200	-
					Subtotal	2,171,610	1,160,309
Disk Subsystem							
NEC Storage S2300 Basic Unit	850161002	NEC	1	46,296	19	879,624	-
2 RAID_Cntrl, 1GB Cache, 1DE, 3 x 36GB Drive							
1GB(2 x 512MB) PC133 SDRAM memory	062-02301-000	NEC	1	1,999	2	3,998	-
S2300 DE (+10% spares)	062-02302-000	NEC	1	6,999	63	440,937	-
36GB 15K rpm FC HDD (+10% spares)	062-02303-000	NEC	1	1,099	1187	1,304,513	-
3yr Telephone Upgrade Hdw & Storage	IS-THSU-1095-0724	NEC	1	1499	19	-	28,481
Manager SW Support; 7days/ 24hours per day							
42U Rackframe	050-01790-000	NEC	1	1,799	8	14,392	-
FC Cable 10MLC-LC (+2 spares)	062-02304-000	NEC	1	200	21	4,200	-
					Subtotal	2,647,664	28,481
Server Software							
SQL Server2000 Ent. Edition(64-bit) ,Processor License	810-00560	Microsoft	2	16,541	32	529,312	5,850
					Subtotal	529,312	5,850
Client Hardware							
NEC Express5800/120Re-2							
Base System with 1 x Xeon Processor 1.8GHz/512KB	850162001	NEC	1	2,859	23	65,757	-
1 x Xeon Processor 1.8GHz/512KB BTO Option,	062-02163-000	NEC	1	399	23	9,177	-
1GB(2 x 512MB) DDR200 SDRAM memory,	062-02168-000	NEC	1	599	23	13,777	-
1 x 18.2GB 10K rpm Ultra160 HDD,	062-02011-000	NEC	1	329	23	7,567	-
CD-ROM, 2 x On-board LAN, KB/MS	Included	NEC	1	-	23	-	-
3 years of warranty service to 4-hour response, 7x24	WG-0000-1095-7244	NEC	1	1,399	23	-	32,177
NEC AccuSync50M-BK (15" monitor)	AS50M-BK	NEC	3	128	23	2,942	-
42U Rackframe	050-01790-000	NEC	1	1,799	2	3,598	-
FC Adapter QLA2350 (+10% spares)	QLA2350	QLogic	4	2,095	26	54,470	-
FC Cable 10MLC-LC (+10% spares)	062-02304-000	NEC	1	200	26	5,200	-
Intel PRO/100 S Server Adapter	PILA8470C3	Intel	3	69	1	69	-
Intel PRO/100 S Server Adapter, 5-pack	PILA8470C3PAK5	Intel	3	286	5	1,430	-
Fast Ether Cable 25' RJ45-RJ45 (+10% spares)	C5E-114GY-25FB	AESP	3	11	76	823	-
					Subtotal	164,810	32,177
Client Software							
Windows2000 Server, Server License	C11-00821	Microsoft	2	738	24	17,712	(Included)
Visual C++ Standard	254-00170	Microsoft	2	109	1	109	(Included)
					Subtotal	17,821	
User Connectivity							
SAN BOX2-16 16-ports 2-Gbit FC Switch(+2 spares)	SB2A-16A	QLogic	4	17,995	4	71,980	-
SFP-Shortwave LC Optic / 8 SFPs per package(+2 spares)	SFP2-SW-01	QLogic	4	2,150	5	10,750	-
					Subtotal	82,730	0
TOTAL						5,613,947	1,226,817
NEC brand total(Pricing 1-NEC)						4,885,216	1,220,967
NEC brand Large Purchase Cash Prepay Discount(-20%)						-977,043	-244,193
Notes: Client softw are maintenance is covered by the maintenance costs of Microsoft SQL Server Pricing: 1-NEC 2-Microsoft 3-CDW 4-Qlogic					3-Yr. Cost of Ownership: \$5,619,528 tpmC Rating: 433107.77		
					\$ / tpmC: \$12.98		
Results and methodology audited by Francois Raab of InfoSizing, Inc. (www.sizing.com)							
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflects standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specifications.If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.							

Numerical Quantities Summary

MQTh, Computed Maximum Qualified Throughput

433,107.77 tpmC

<u>Response Times(in seconds)</u>	<u>90%</u>	<u>Average</u>	<u>Maximum</u>
New-Order	2.17	1.29	12.15
Payment	2.14	1.26	12.32
Stock-Level	2.22	1.31	10.42
Delivery(interactive portion)	0.11	0.10	0.98
Delivery(deferred portion)	0.16	0.11	2.23
Order-status	2.19	1.28	10.42
Menu	0.11	0.10	1.30

Response time delay added for emulated components

0.1

Transaction Mix , in percent of total transaction

New-Order	44.93%
Payment	43.04%
Order-Status	4.02%
Delivery	4.01%
Stock-Level	4.00%

<u>Keying/Think Times (in seconds)</u>	<u>Min.</u>		<u>Average</u>		<u>Max</u>	
New-Order	18.00	0.00	18.02	12.07	18.06	120.72
Payment	3.00	0.00	3.02	12.07	3.06	120.71
Order-Status	2.00	0.00	2.02	10.07	2.06	100.71
Delivery	2.00	0.00	2.02	5.08	2.06	50.71
Stock-Level	2.00	0.00	2.02	5.07	2.06	50.71

Test Duration

Ramp-up time	90 minutes
Measurement interval	120 minutes
Number of checkpoints	4
Checkpoint interval	30 minutes
Number of transactions (all types) completed in measurement interval	120,376,111

ABSTRACT	1
TPC BENCHMARK TM C METRICS	1
STANDARD AND EXECUTIVE SUMMARY STATEMENTS	1
AUDITOR	1
PREFACE	2
TPC BENCHMARK TM C OVERVIEW	2
DOCUMENT STRUCTURE	2
GENERAL ITEMS	3
ORDER AND TITLES	3
SUMMARY STATEMENT	3
NUMERICAL QUANTITIES SUMMARY	3
APPLICATION PROGRAM	3
SPONSOR	3
PARAMETERS AND OPTIONS	4
CONFIGURATION DIAGRAMS	4
MEASURED CONFIGURATION	5
PRICED SYSTEM CONFIGURATION	6
CLAUSE 1 : LOGICAL DATABASE DESIGN AND RELATED ITEMS	7
TABLE DEFINITIONS	7
TABLE ORGANIZATION	7
INSERT AND DELETE OPERATIONS	7
DISCLOSURE OF PARTITIONING	7
REPLICATION OF TABLES	7
ADDITIONAL AND/OR DUPLICATED ATTRIBUTES IN ANY TABLE	7
CLAUSE 2 : TRANSACTION AND TERMINAL PROFILES RELATED ITEMS	8
RANDOM NUMBER GENERATION	8
TERMINAL INPUT/OUTPUT SCREEN LAYOUT	8
TERMINAL FEATURE VERIFICATION	8
PRESENTATION MANAGER OR INTELLIGENT TERMINAL	8
TRANSACTION PROFILES	8
TRANSACTION MIX	8
QUEUEING MECHANISM	9
CLAUSE 3 : TRANSACTION AND SYSTEM PROPERTIES RELATED ITEMS	10
TRANSACTION SYSTEM PROPERTIES (ACID)	10
ATOMICITY TESTS	10
Completed Transactions	10
Aborted Transactions	10
CONSISTENCY TESTS	10
ISOLATION TESTS	10
DURABILITY TESTS	10
Loss of Memory and Log	11
Loss of Data	11
Loss of mirrored write-back cache	11
CLAUSE 4 : SCALING AND DATABASE POPULATION RELATED ITEMS	12
INITIAL CARDINALITY OF TABLES	12
CONSTANT VALUE FOR THE NURAND FUNCTION	12
DISTRIBUTION OF TABLES AND LOGS	13
TYPE OF DATABASE	14
DATABASE MAPPING	14
60-DAYS SPACE	14
CLAUSE 5 : PERFORMANCE METRICS AND RESPONSE TIME RELATED ITEMS	16

THROUGHPUT.....	16
RESPONSE TIMES	16
KEYING AND THINK TIMES.....	16
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES.....	16
RESPONSE TIME VERSUS THROUGHPUT PERFORMANCE CURVE.....	19
NEW-ORDER THINK TIME FREQUENCY DISTRIBUTION	20
NEW-ORDER THROUGHPUT VS. ELAPSED TIME	20
STEADY STATE.....	21
WORK PERFORMED DURING STEADY STATE.....	21
MEASUREMENT PERIOD DURATION AND CHECKPOINT DURATION.....	21
REGULATION OF TRANSACTION MIX.....	21
TRANSACTION STATISTICS.....	21
CHECKPOINT COUNT AND LOCATION	22
CLAUSE 6 : SUT, DRIVER, AND COMMUNICATION DEFINITION RELATED ITEMS.....	22
DESCRIPTIONS OF RTE	22
LOSS OF TERMINAL CONNECTIONS	22
EMULATED COMPONENTS.....	22
FUNCTIONAL DIAGRAMS AND DETAIL OF DRIVER SYSTEM	22
NETWORK CONFIGURATIONS AND DRIVER SYSTEM	22
NETWORK BANDWIDTH	22
OPERATOR INTERVENTION	22
CLAUSE 7 : PRICING RELATED ITEMS.....	23
HARDWARE AND SOFTWARE COMPONENTS	23
AVAILABILITY	23
THROUGHPUT, AND PRICE PERFORMANCE.....	23
COUNTRY SPECIFIC PRICING.....	23
USAGE PRICING	23
SYSTEM PRICING	23
CLAUSE 8 : AUDIT RELATED ITEMS	24
AUDITOR'S REPORT	24
AVAILABILITY OF THE FULL DISCLOSURE REPORT	24
AUDITOR'S LETTER.....	25
<u>APPENDIX A : APPLICATION SOURCE CODE.....</u>	27
<u>APPENDIX B : DATABASE DESIGN.....</u>	79
<u>APPENDIX C : TUNABLE PARAMETERS.....</u>	103
<u>APPENDIX D : SPACE CALCULATION.....</u>	178
<u>APPENDIX E : PRICE QUOTATION.....</u>	179

Abstract

This report documents the compliance of NEC Corporation's TPC Benchmark™ C tests on the NEC Express5800/1320Xc client/server system with version 5.1 of the TPC Benchmark C Standard Specification. 23 Clients (NEC Express5800/120Re-2) were used as the front-end clients.

The operating system and the DBMS used on the server were Microsoft® Windows® Server 2003, Datacenter Edition and Microsoft® SQL Server™ 2000, Enterprise Edition(64-bit). The operating system on the clients was Microsoft® Windows® 2000 Server SP2. Those clients ran Microsoft® IIS server 5.0 and COM+.

Two standard metrics, transaction-per-minute-C(tpmC) and price per tpmC(\$/tpmC) are reported, in accordance with the TPC Benchmark™ C Standard. The independent auditor's report by Francois Raab appears at the end of this report.

TPC Benchmark™ C Metrics

The standard TPC Benchmark™ C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC) are reported.

System	SW	Total System Cost	TpmC	\$ per tpmC	Availability Date
NEC Express5800 /1320Xc	Microsoft® Windows® Server 2003, Datacenter Edition for 64-bit Itanium-based Systems Microsoft® SQL Server™ 2000, Enterprise Edition(64-bit)	\$5,619,528	433,107.77	\$12.98	June 30, 2003

Standard and Executive Summary Statements

The following pages contain executive summary of results for this benchmark.

Auditor

The benchmark configuration, environment and methodology were audited by Francois Raab of Info Sizing Inc. to verify compliance with the relevant TPC specifications.

Preface

The TPC Benchmark™ C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark™ C Standard Specifications Version 5.1.

TPC Benchmark™ C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- *The simultaneous execution of multiple transaction types that span a breadth of complexity*
- *On-line and deferred transaction execution modes*
- *Multiple on-line terminal sessions*
- *Moderate system and application execution time*
- *Significant disk input/output*
- *Transaction integrity (ACID properties)*
- *Non-uniform distribution of data access through primary and secondary keys*
- *Databases consisting of many tables with a wide variety of sizes, attributes, and relationships*
- *Contention on data access and update*

The performance metric reported by TPC-C is a “business throughput” measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

Document Structure

This TPC Benchmark™ C Full Disclosure Report is organized as follows:

- The main body of the document lists each item in Clause 8 of the TPC-C Standard and explains how each requirement is satisfied.
- Appendix A contains the source code of the TPC-C application code used to implement the TPC-C transactions.
- Appendix B contains the database definition and population code used in the tests.
- Appendix C contains the tunable parameters used in the TPC-C tests.
- Appendix D contains space calculation table.
- Appendix E contains third-party price quotations.

TPC Benchmark™ C Full Disclosure

The TPC Benchmark™ C Standard Specification requires test sponsors to publish, and make available to the public, a full disclosure report for the results to be considered compliant with the Standard. The required contents of the full disclosure report are specified in Clause 8. This report is intended to satisfy the Standard's requirement for full disclosure. It documents the compliance of the benchmark tests with each item listed in Clause 8 of the TPC Benchmark™ C Standard Specification.

In the Standard Specification, the main headings in Clause 8 are keyed to the other clauses. The headings in this report use the same sequence, so that they correspond to the titles or subjects referred to in Clause 8.

Each section in this report begins with the text of the corresponding item from Clause 8 of the Standard Specification, printed in italic type. The plain text that follows explains how the tests comply with the TPC Benchmark™ C requirement. In sections where Clause 8 requires extensive listings, the section refers to the appropriate appendix at the end of this report.

General Items

Order and titles

The order and titles of sections in the Test Sponsor's Full Disclosure report must correspond with the order and titles of sections from the TPC-C standard specification (i.e., this document). The intent is to make it as easy as possible for readers to compare and contrast material in different Full Disclosure reports.

The order and titles of sections in this report correspond with that of the TPC-C standard specification.

Summary Statement

The TPC Executive Summary Statement must be included near the beginning of the Full Disclosure report.

The TPC Executive Summary Statement is included at the beginning of this report.

Numerical Quantities Summary

The numerical quantities listed below must be summarized near the beginning of the Full Disclosure report :

- *measurement interval in minutes,*
- *number of checkpoints in the measurement interval,*
- *longest checkpoint interval in minutes,*
- *number of transactions (all types) completed within the measurement interval,*
- *computed Maximum Qualified Throughput in tpmC,*
- *ninetieth percentile, average and maximum response times for the New-Order, Payment, Order-Status, Stock-Level, Delivery (deferred and interactive) and Menu transactions,*
- *time in seconds added to response time to compensate for delays associated with emulated components,*
- *percentage of transaction mix for each transaction type.*

These numerical quantities are summarized at the beginning of this report.

Application Program

The application program (as defined in 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input and output functions.

Appendix A contains the application source codes used in the TPC-C benchmark.

Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark test was sponsored by NEC Corporation . NEC has authorized NEC Corp. to publish TPC-C performance and price/performance results for the NEC Express5800/1320Xc. Price quotations contained in Appendix E correspond to the NEC Express5800/1320Xc server.

Parameters and Options

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including but not limited to:

- *Database tuning options.*
- *Recovery/commit options.*
- *Consistency/locking options.*
- *Operating system and application configuration parameters.*
- *Compilation and linkage options and run-time optimizations used to create/install applications, OS, and/or databases.*

Appendix C contains the tunable parameters used in the TPC-C tests.

Configuration Diagrams

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:

- *Number and type of processors*
- *Size of allocated memory, and any specific mapping/partitioning of memory unique to the test.*
- *Number and type of disk units (and controllers, if applicable).*
- *Number of channels or bus connections to disk units, including their protocol type.*
- *Number of LAN (e.g., Ethernet) connections, including routers, workstations, terminals, etc., that were physically used in the test or are incorporated into the pricing structure (see Clause 8.1.8).*
- *Type and the run-time execution location of software components (e.g., DBMS, client processes, transaction monitors, software drivers, etc.).*

Figure 1.1 shows the measured configuration diagram.


Figure 1.2 shows the priced configuration diagram.

Measured Configuration

The following figure represents the measured configuration. The benchmark system used a remote terminal emulator (RTE) to initiate transactions and measure response times of transactions, as well as record various data for each transaction.

Figure 1.1 Express5800/1320Xc, Measured Configuration Diagram

23 RTEs emulating 360,000 users

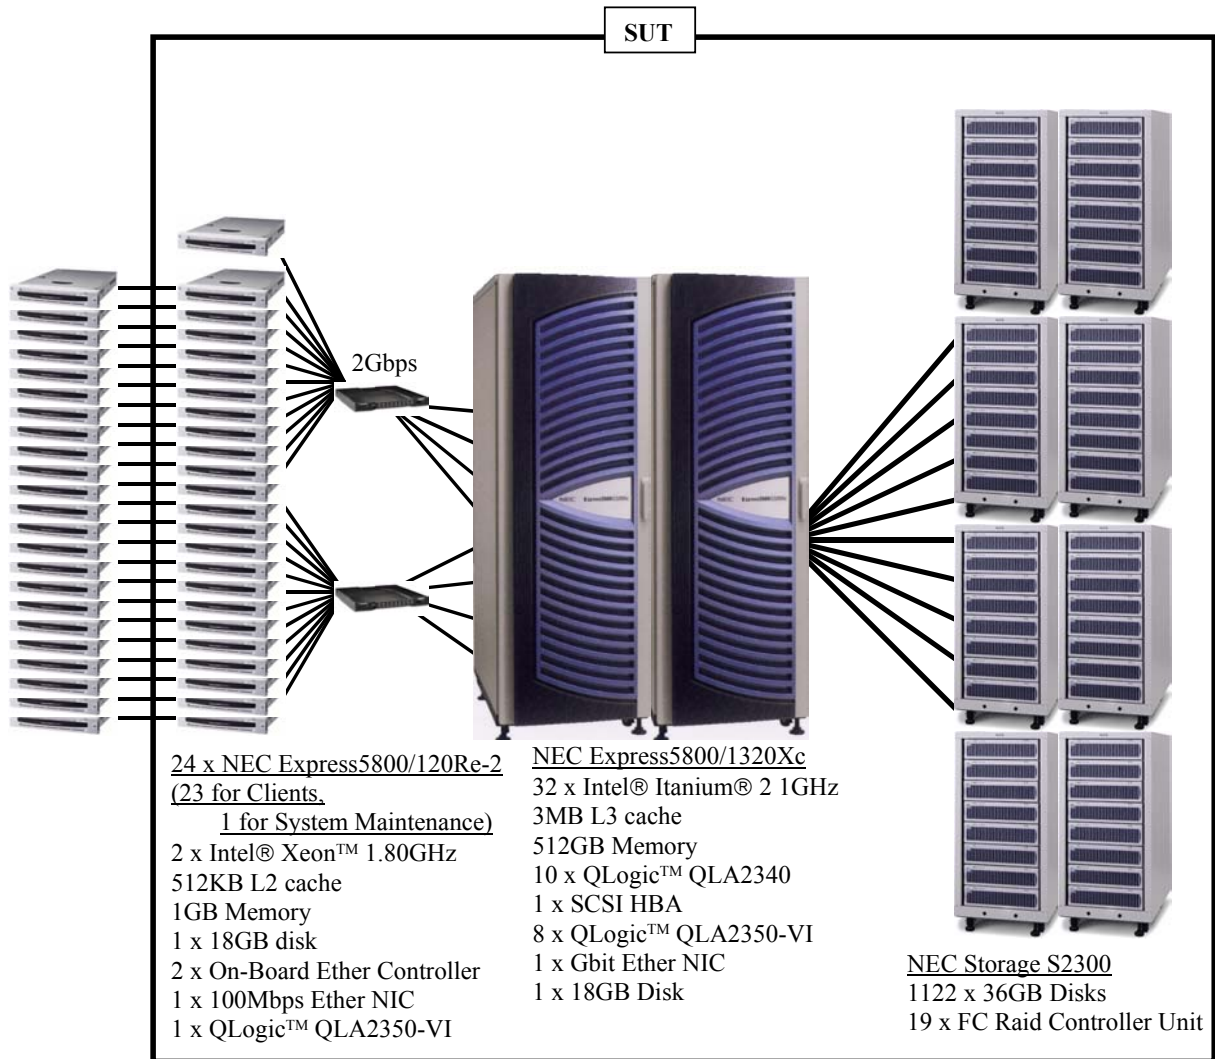


Priced System Configuration

The following figure depicts the priced system, whose cost determines the normalized price per tpmC reported for the test.

Figure1.2: Express5800/1320Xc, Priced Configuration Diagram

Total 360,000 Users

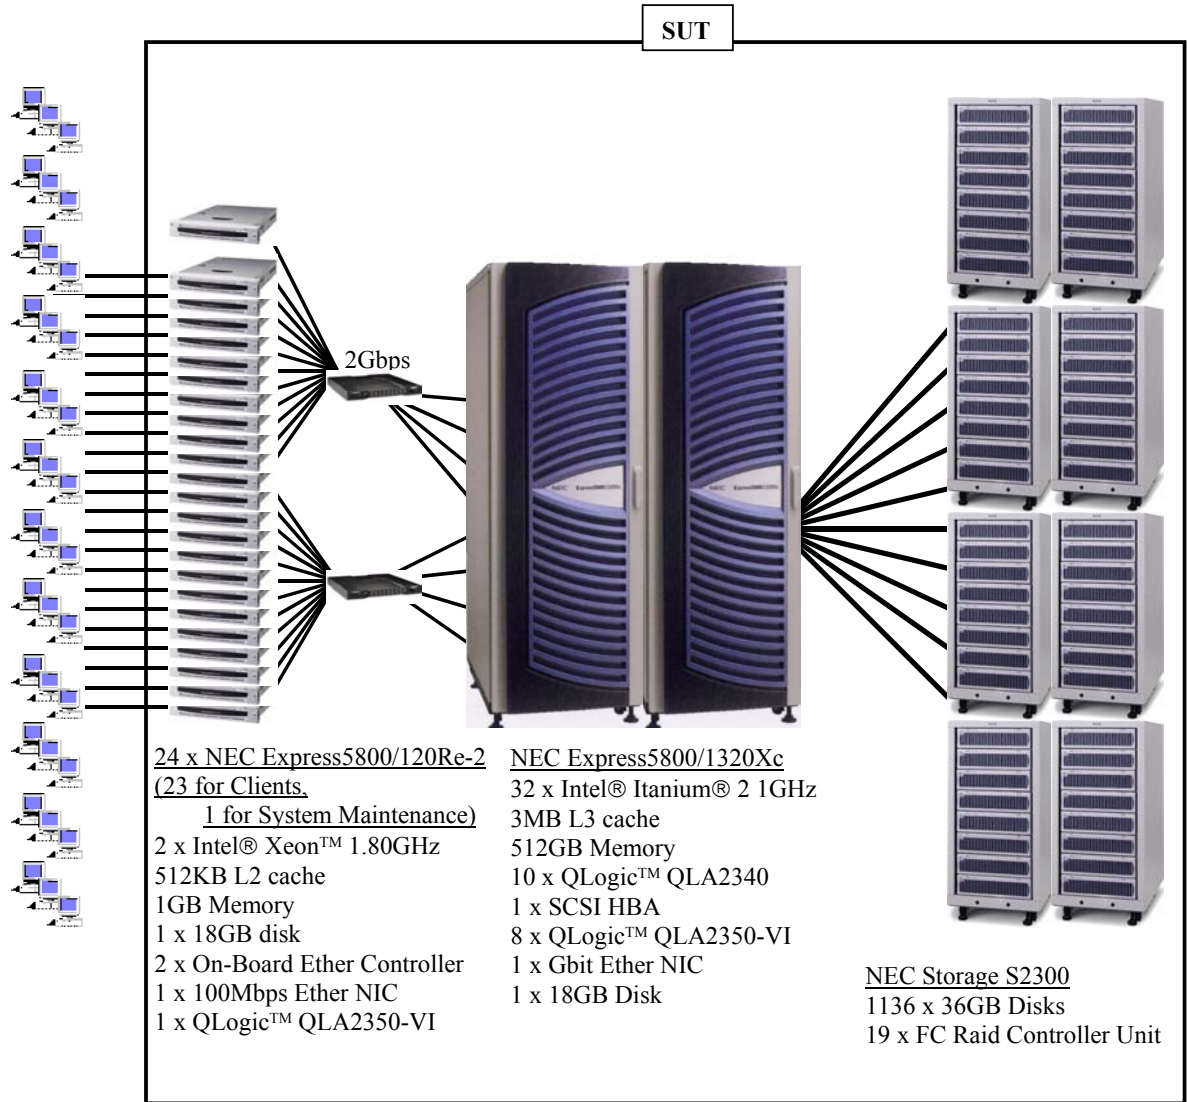

Clause 1 : Logical Database Design and Related Items

Table Definitions

Listings must be provided for all table definition statements and all other statements used to set-up the database.

Appendix B contains the code used to define and load the database tables.

Table Organization

The physical organization of tables and indices, within the database, must be disclosed.

Appendix B contains the code used to define the physical organization of tables and indices

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restriction in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the maximum key value for these new rows

All insert and delete functions were fully operational during the entire benchmark.

Disclosure of Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark (see Clause 1.6), any such partitioning must be disclosed.

Partitioning was not used on any table in this benchmark.

Replication of Tables

Replication of tables, if used, must be disclosed (see Clause 1.4.6).

No tables were replicated in this benchmark test.

Additional and/or Duplicated Attributes in any Table

Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance (see Clause 1.4.7).

No duplications or additional attributes were used in this benchmark.

Clause 2 : Transaction and Terminal profiles Related Items

Random Number Generation

The method of verification for the random number generation must be described.

Random numbers were generated internally by the Microsoft® BenchCraft RTE program which was already audited independently.

Terminal Input/Output Screen Layout

The actual layouts of the terminal input/output screens must be disclosed.

All screen layouts followed the specifications exactly.

Terminal feature Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

Each of five transaction types was tested by the auditor. The auditor verified that all the features specified in Clause 2.2.2.4 were provided.

Presentation Manager or Intelligent Terminal

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the applications is listed in Appendix A.

Transaction Profiles

- . *The percentage of home and remote order-lines in the New-Order transactions must be disclosed.*
- . *The percentage of New-Order transactions that were rolled back as a result of an unused item number must be disclosed.*
- . *The number of items per orders entered by New-Order transactions must be disclosed.*
- . *The percentage of home and remote Payment transactions must be disclosed.*
- . *The percentage of Payment and Order-Status transactions that used non-primary key (C_LAST) access to the database must be disclosed.*
- . *The percentage of Delivery transactions that were skipped as a result of an insufficient number of rows in the NEW-ORDER table must be disclosed.*

Table 1 shows the numerical quantities required by Clause 8.1.3.5 through 8.1.3.10.

Transaction Mix

The Mix (i.e. , percentages) of transaction types seen by the SUT must be disclosed.

Table 1 shows the mix of transaction types seen by the SUT during the reported measurement interval.

Following table summarizes the data required for disclosure in Clause 8.1.3.5 through 8.1.3.11

Table 1 Transaction Statistics

	Statistic	Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.00%
Order Status	Accessed by last name	60.09%
Delivery	Skipped deliveries	0
Transaction Mix	New Order	44.93%
	Payment	43.04%
	Order Status	4.02%
	Delivery	4.01%
	Stock Level	4.00%

Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

The client application processes submitted delivery transactions to named pipe delivery server software running on the client machines. There was a single delivery server with multiple execution threads running on each client machine. These delivery servers were responsible for processing deliveries queued to the named pipe and submitting them to the database server.

The source code is listed in Appendix A.

Clause 3 : Transaction and System Properties Related Items

Transaction System Properties (ACID)

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

The TPC Benchmark™ C Standard Specification defines a set of transaction processing system properties that a system under test (SUT) must support during the execution of the benchmark. Those properties are Atomicity, Consistency, Isolation and Durability (ACID). This section quotes the specification definition of each of those properties and describes the tests done as specified and monitored by the auditor, to demonstrate compliance.

Atomicity Tests

The system under test must guarantee that database transactions are atomic; the system will either perform all individual operations on the data, or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

Perform the Payment transaction for a randomly selected warehouse, district and customer (by customer number as specified in Clause 2.5.1.2) and verify that the records in the CUSTOMER, DISTRICT and WAREHOUSE tables have been changed appropriately.

The value of w_ytd, d_ytd, c_balance, c_ytd_payment and c_payment_cnt of a randomly selected warehouse, district, and customer were retrieved. The Payment transaction was executed on the same warehouse, district, and customer. The transaction was committed. The values w_ytd, d_ytd, c_balance, c_ytd_payment, and c_payment_cnt were retrieved again. It was verified that all values had been changed appropriately.

Aborted Transactions

Perform the Payment transaction for a randomly selected warehouse, district and customer (by customer number as specified in Clause 2.5.1.2) and substitute a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the records in CUSTOMER, DISTRICT and WAREHOUSE tables have Not been changed.

The value of w_ytd, d_ytd, c_balance, c_ytd_payment and c_payment_cnt of randomly selected warehouse, district, and customer were retrieved. The Payment transaction was executed on the same warehouse, district, and customer. The transaction was rolled back. The values of w_ytd, d_ytd, c_balance, c_ytd_payment, c_payment_cnt were retrieved again. It was verified that none of the values had changed.

Consistency Tests

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests. A run was executed over 50 minutes under 180,000 users (18,000 active warehouse) condition. A checkpoint generated in the test. The shell script of consistency was executed before and after the run. The result of the same queries verified that the database remained consistent after the run.

Isolation Tests

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation level is obtained.

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified to demonstrate the required isolation had been met.

Case A was followed for Isolation Test 7, 8 and 9.

Durability Tests

The tested system must guarantee durability: the ability to preserve the effects of committed transactions and ensure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

- *Permanent irrecoverable failure of any single durable medium during the Measurement Interval containing TPC-C database tables or recovery log data.*
- *Instantaneous interruption (system or subsystem crash/system hang) in processing which causes all or part of the processing of atomic transactions to halt..*

Loss of Memory and Log

Because the loss of power erases the contents of memory, both of instantaneous interruption and loss of memory were combined into a single test.

The following steps were performed on a database of 36,000 warehouses under the full load of users.

1. A sum of D_NEXT_O_ID of all rows in the district table was taken.
2. 360,000 users were logged in to the database and start transactions.
3. Waited for all emulated users to be activated and the number of TpmC exceed 90% of reported TpmC.
4. Removed one of mirrored log disk. The running continued without any interruptions.
5. Keep running more 5 minutes.
6. The system was powered off.
7. The RTE was shut down.
8. The system was powered up. SQL Server™ 2000 was restarted and automatically recovered.
9. A new count of D_NEXT_O_ID was taken.
10. This number was compared with the number of new orders reported by the RTE.

Loss of Data

Loss of data was demonstrated on a 3,700 Warehouse database. The standard driving mechanism was used to generate the transaction load of 37,000 users for the test. To demonstrate recovery from a permanent failure of durable media containing TPC-C tables, the following steps were performed.

1. A 3,700 Warehouse database was built having similar characteristics to the large database.
2. The database was backed up using SQL Server™ 2000 backup facilities.
3. A sum of D_NEXT_O_ID was taken.
4. 37,000 users were logged in to the database and kept running transactions about 5 minutes in steady state.
5. One disk drive for data part in the array was removed causing SQL Server™ 2000 error. Shut down SQL Server™ 2000.
6. SQL Server™ 2000 was restarted and a dump of the transaction log was taken.
7. The 3,700 Warehouse database was restored from backup.
8. The transaction log was restored and transactions rolled forward.
9. A new count of D_NEXT_O_ID was taken.
10. This number was compared with the number of new orders reported by the RTE.

Loss of mirrored write-back cache

The Fibre Array system used for this benchmark has integrated feature of mirrored write-back cache. When a LUN is configured to enable write-back caching, the data on the cache is automatically mirrored on the RAMs in two controller modules, which are powered and protected from loss of power by the controller BBU. Loss of write-back cache was demonstrated on 3,700 warehouse database, by pulling off one of the controller module. A fully scaled database would also pass this test.

1. A sum of D_NEXT_O_ID of all rows in the district table was taken.
2. 37,000 users were logged in to the database and kept running transactions about 5 minutes in steady state.
3. A controller module, which manages write-back cache of mirrored drives, was pulled off.
4. Fibre system reported system error resulted in IO error for SQL database.
5. Contents on mirrored cache on another controller were automatically saved to temporal disk area and the Fibre Array house was eventually stopped. System was shut down.
6. The Fibre array was re-powered.
7. Saved data was automatically restored to mirrored cache and flushed to drives.
8. SQL Server™ 2000 was started up and database was recovered automatically.
9. A new count of D_NEXT_O_ID was taken.
10. This number was compared with the number of new orders reported by the RTE.

Clause 4 : Scaling and Database Population Related Items

Initial Cardinality of Tables

The cardinality (e.g., the number of rows) of each table, as it existed at the start of the benchmark run (see Clause 4.2), must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted (see Clause 4.2.2), the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

The TPC-C database was originally built with 37,000 warehouses.

Table 2 Number of Rows for Server

Table	Cardinality as benchmarked
Warehouse	37,000
District	370,000
Customer	1,110,000,000
History	1,110,000,000
Orders	1,110,000,000
New Order	333,000,000
Order Line	11,099,967,833
Stock	3,700,000,000
Item	100,000
Deleted Warehouse Rows	1,000

1,000 warehouses were deleted before the measurement. 36,000 warehouses and their associated tables were accessed during the measurement.

Constant Value for the NURand function

The following values were used as constant value inputs to the NURand function for this benchmark.

C_LAST (Build)	123
C_LAST (RUN)	233

Distribution of Tables and Logs

The distribution of tables and logs across all media must be explicitly depicted for the tested and priced systems.

Table 3 depicts the distribution of the database over the disks of the tested and priced system.

Figure 1.1, 1.2 shows the disk configuration for measured and priced system.

Table 3 : Data Distribution

HBA#	storage system#	SP#	DEU#	# of Disks	RAID Level	Capacity (GB)	Partition1	Partition2	Partition3	Partition4
Partitions for DB Log							Logfiles (raw)	Junction point (NTFS)		
0	0	0	0	14	1/0	232.82	z:\dev\log (200GB)	Z: (32.81GB)		
				14	1/0	232.82	z:\dev\log2 (200GB)	unused (32.81GB)		
				14	1/0	232.82	z:\dev\log3 (200GB)	unused (32.81GB)		
				14	1/0	232.82	Not included in tested configuration			

Partitions for DB Data							misc fg (raw)	cs fg (raw)	freespace	backup file (NTFS)	
1	1	0	0	15	0	498.92	z:\dev\m001 (20GB)	z:\dev\c001 (30GB)	(30GB)	z:\dev\b001 (418.91GB)	
				15	0	498.92	z:\dev\m002 (20GB)	z:\dev\c002 (30GB)	(30GB)	z:\dev\b002 (418.91GB)	
				15	0	498.92	z:\dev\m003 (20GB)	z:\dev\c003 (30GB)	(30GB)	z:\dev\b003 (418.91GB)	
				15	0	498.92	z:\dev\m004 (20GB)	z:\dev\c004 (30GB)	(30GB)	z:\dev\b004 (418.91GB)	
	2	0	0	0	15	0	498.92	z:\dev\m005 (20GB)	z:\dev\c005 (30GB)	(30GB)	z:\dev\b005 (418.91GB)
					15	0	498.92	z:\dev\m006 (20GB)	z:\dev\c006 (30GB)	(30GB)	z:\dev\b006 (418.91GB)
					15	0	498.92	z:\dev\m007 (20GB)	z:\dev\c007 (30GB)	(30GB)	z:\dev\b007 (418.91GB)
					15	0	498.92	z:\dev\m008 (20GB)	z:\dev\c008 (30GB)	(30GB)	z:\dev\b008 (418.91GB)
2	3	0	0	15	0	498.92	z:\dev\m009 (20GB)	z:\dev\c009 (30GB)	(30GB)	z:\dev\b009 (418.91GB)	
				15	0	498.92	z:\dev\m010 (20GB)	z:\dev\c010 (30GB)	(30GB)	z:\dev\b010 (418.91GB)	
				15	0	498.92	z:\dev\m011 (20GB)	z:\dev\c011 (30GB)	(30GB)	z:\dev\b011 (418.91GB)	
				15	0	498.92	z:\dev\m012 (20GB)	z:\dev\c012 (30GB)	(30GB)	z:\dev\b012 (418.91GB)	
	4	0	0	0	15	0	498.92	z:\dev\m013 (20GB)	z:\dev\c013 (30GB)	(30GB)	z:\dev\b013 (418.91GB)
					15	0	498.92	z:\dev\m014 (20GB)	z:\dev\c014 (30GB)	(30GB)	z:\dev\b014 (418.91GB)
					15	0	498.92	z:\dev\m015 (20GB)	z:\dev\c015 (30GB)	(30GB)	z:\dev\b015 (418.91GB)
					15	0	498.92	z:\dev\m016 (20GB)	z:\dev\c016 (30GB)	(30GB)	z:\dev\b016 (418.91GB)
3	5	0	0	15	0	498.92	z:\dev\m017 (20GB)	z:\dev\c017 (30GB)	(30GB)	z:\dev\b017 (418.91GB)	
				15	0	498.92	z:\dev\m018 (20GB)	z:\dev\c018 (30GB)	(30GB)	z:\dev\b018 (418.91GB)	
				15	0	498.92	z:\dev\m019 (20GB)	z:\dev\c019 (30GB)	(30GB)	z:\dev\b019 (418.91GB)	
				15	0	498.92	z:\dev\m020 (20GB)	z:\dev\c020 (30GB)	(30GB)	z:\dev\b020 (418.91GB)	
	6	0	0	0	15	0	498.92	z:\dev\m021 (20GB)	z:\dev\c021 (30GB)	(30GB)	z:\dev\b021 (418.91GB)
					15	0	498.92	z:\dev\m022 (20GB)	z:\dev\c022 (30GB)	(30GB)	z:\dev\b022 (418.91GB)
					15	0	498.92	z:\dev\m023 (20GB)	z:\dev\c023 (30GB)	(30GB)	z:\dev\b023 (418.91GB)
					15	0	498.92	z:\dev\m024 (20GB)	z:\dev\c024 (30GB)	(30GB)	z:\dev\b024 (418.91GB)
4	7	0	0	15	0	498.92	z:\dev\m025 (20GB)	z:\dev\c025 (30GB)	(30GB)	z:\dev\b025 (418.91GB)	
				15	0	498.92	z:\dev\m026 (20GB)	z:\dev\c026 (30GB)	(30GB)	z:\dev\b026 (418.91GB)	
				15	0	498.92	z:\dev\m027 (20GB)	z:\dev\c027 (30GB)	(30GB)	z:\dev\b027 (418.91GB)	
				15	0	498.92	z:\dev\m028 (20GB)	z:\dev\c028 (30GB)	(30GB)	z:\dev\b028 (418.91GB)	
	8	0	0	0	15	0	498.92	z:\dev\m029 (20GB)	z:\dev\c029 (30GB)	(30GB)	z:\dev\b029 (418.91GB)
					15	0	498.92	z:\dev\m030 (20GB)	z:\dev\c030 (30GB)	(30GB)	z:\dev\b030 (418.91GB)
					15	0	498.92	z:\dev\m031 (20GB)	z:\dev\c031 (30GB)	(30GB)	z:\dev\b031 (418.91GB)
					15	0	498.92	z:\dev\m032 (20GB)	z:\dev\c032 (30GB)	(30GB)	z:\dev\b032 (418.91GB)
5	9	0	0	15	0	498.92	z:\dev\m033 (20GB)	z:\dev\c033 (30GB)	(30GB)	z:\dev\b033 (418.91GB)	
				15	0	498.92	z:\dev\m034 (20GB)	z:\dev\c034 (30GB)	(30GB)	z:\dev\b034 (418.91GB)	
				15	0	498.92	z:\dev\m035 (20GB)	z:\dev\c035 (30GB)	(30GB)	z:\dev\b035 (418.91GB)	
				15	0	498.92	z:\dev\m036 (20GB)	z:\dev\c036 (30GB)	(30GB)	z:\dev\b036 (418.91GB)	
	10	0	0	0	15	0	498.92	z:\dev\m037 (20GB)	z:\dev\c037 (30GB)	(30GB)	z:\dev\b037 (418.91GB)
					15	0	498.92	z:\dev\m038 (20GB)	z:\dev\c038 (30GB)	(30GB)	z:\dev\b038 (418.91GB)
					15	0	498.92	z:\dev\m039 (20GB)	z:\dev\c039 (30GB)	(30GB)	z:\dev\b039 (418.91GB)
					15	0	498.92	z:\dev\m040 (20GB)	z:\dev\c040 (30GB)	(30GB)	z:\dev\b040 (418.91GB)

6	11	0	0	15	0	498.92	z:\dev\m041 (20GB)	z:\dev\c041 (30GB)	(30GB)	z:\dev\b041 (418.91GB)
			1	15	0	498.92	z:\dev\m042 (20GB)	z:\dev\c042 (30GB)	(30GB)	z:\dev\b042 (418.91GB)
			2	15	0	498.92	z:\dev\m043 (20GB)	z:\dev\c043 (30GB)	(30GB)	z:\dev\b043 (418.91GB)
			3	15	0	498.92	z:\dev\m044 (20GB)	z:\dev\c044 (30GB)	(30GB)	z:\dev\b044 (418.91GB)
	12	0	0	15	0	498.92	z:\dev\m045 (20GB)	z:\dev\c045 (30GB)	(30GB)	z:\dev\b045 (418.91GB)
			1	15	0	498.92	z:\dev\m046 (20GB)	z:\dev\c046 (30GB)	(30GB)	z:\dev\b046 (418.91GB)
			2	15	0	498.92	z:\dev\m047 (20GB)	z:\dev\c047 (30GB)	(30GB)	z:\dev\b047 (418.91GB)
7	13	0	0	15	0	498.92	z:\dev\m049 (20GB)	z:\dev\c049 (30GB)	(30GB)	z:\dev\b049 (418.91GB)
			1	15	0	498.92	z:\dev\m050 (20GB)	z:\dev\c050 (30GB)	(30GB)	z:\dev\b050 (418.91GB)
			2	15	0	498.92	z:\dev\m051 (20GB)	z:\dev\c051 (30GB)	(30GB)	z:\dev\b051 (418.91GB)
			3	15	0	498.92	z:\dev\m052 (20GB)	z:\dev\c052 (30GB)	(30GB)	z:\dev\b052 (418.91GB)
	14	0	0	15	0	498.92	z:\dev\m053 (20GB)	z:\dev\c053 (30GB)	(30GB)	z:\dev\b053 (418.91GB)
			1	15	0	498.92	z:\dev\m054 (20GB)	z:\dev\c054 (30GB)	(30GB)	z:\dev\b054 (418.91GB)
			2	15	0	498.92	z:\dev\m055 (20GB)	z:\dev\c055 (30GB)	(30GB)	z:\dev\b055 (418.91GB)
8	15	0	0	15	0	498.92	z:\dev\m057 (20GB)	z:\dev\c057 (30GB)	(30GB)	z:\dev\b057 (418.91GB)
			1	15	0	498.92	z:\dev\m058 (20GB)	z:\dev\c058 (30GB)	(30GB)	z:\dev\b058 (418.91GB)
			2	15	0	498.92	z:\dev\m059 (20GB)	z:\dev\c059 (30GB)	(30GB)	z:\dev\b059 (418.91GB)
			3	15	0	498.92	z:\dev\m060 (20GB)	z:\dev\c060 (30GB)	(30GB)	z:\dev\b060 (418.91GB)
	16	0	0	15	0	498.92	z:\dev\m061 (20GB)	z:\dev\c061 (30GB)	(30GB)	z:\dev\b061 (418.91GB)
			1	15	0	498.92	z:\dev\m062 (20GB)	z:\dev\c062 (30GB)	(30GB)	z:\dev\b062 (418.91GB)
			2	15	0	498.92	z:\dev\m063 (20GB)	z:\dev\c063 (30GB)	(30GB)	z:\dev\b063 (418.91GB)
9	17	0	0	15	0	498.92	z:\dev\m065 (20GB)	z:\dev\c065 (30GB)	(30GB)	z:\dev\b065 (418.91GB)
			1	15	0	498.92	z:\dev\m066 (20GB)	z:\dev\c066 (30GB)	(30GB)	z:\dev\b066 (418.91GB)
			2	15	0	498.92	z:\dev\m067 (20GB)	z:\dev\c067 (30GB)	(30GB)	z:\dev\b067 (418.91GB)
			3	15	0	498.92	z:\dev\m068 (20GB)	z:\dev\c068 (30GB)	(30GB)	z:\dev\b068 (418.91GB)
	18	0	0	15	0	498.92	z:\dev\m069 (20GB)	z:\dev\c069 (30GB)	(30GB)	z:\dev\b069 (418.91GB)
			1	15	0	498.92	z:\dev\m070 (20GB)	z:\dev\c070 (30GB)	(30GB)	z:\dev\b070 (418.91GB)
			2	15	0	498.92	z:\dev\m071 (20GB)	z:\dev\c071 (30GB)	(30GB)	z:\dev\b071 (418.91GB)
			3	15	0	498.92	z:\dev\m072 (20GB)	z:\dev\c072 (30GB)	(30GB)	z:\dev\b072 (418.91GB)

Type of Database

A statement must be provided that describes:

1. The data model implemented by the DBMS used (e.g., relational, network, hierarchical)
2. The database interface (e.g., embedded, call level) and access language (e.g., SQL, DL/I, COBOL read/write) used to implement the TPC-C transactions. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.

Microsoft® SQL Server™ 2000, a relational database, was used in this benchmark. SQL Server™ 2000 stored procedures were used and invoked through DB-Library function calls embedded in C code.

Database Mapping

The mapping of database partitions/replications must be explicitly described.

No partitioning or replication was used.

60-Days Space

Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed (see Clause 4.2.3).

The detail of 60-day space calculation is shown in Appendix D.

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

1. The free space on the log file was queried using *DBCC sqlperf(logspace)*.

2. Transactions were run against the database with a full load of users.
3. The free space was again queried using *DBCC sqlperf(logspace)*.
4. The space used was calculated as the difference between the first and second query.
5. The number of NEW-ORDERS was verified from an RTE report covering the entire run.
6. The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
7. The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The results of the above steps yielded a requirement of 922.70 GB of logspace (i.e. 1,845.41 GB of mirrored transaction log volume) to be available to sustain 8 hours. Total space of priced disks for the transaction log volume was 1,862.50 GB. It indicates that enough storage was configured to sustain 8 hours of growth.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

Clause 5 : Performance Metrics and Response Time Related Items

Throughput

Measured tpmC must be reported

Table 4 : Measured tpmC

433,107.77tpmC

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the Menu response time.

Table 5 : Response Times (in seconds)

Type	Average	Maximum	90 th %
New-Order	1.29	12.15	2.17
Payment	1.26	12.32	2.14
Stock Level	1.31	10.42	2.22
Interactive Delivery	0.10	0.98	0.11
Deferred Delivery	0.11	2.23	0.16
Order Status	1.28	10.42	2.19
Menu	0.10	1.30	0.11

Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 6 : Keying Times

Type	Minimum	Average	Maximum
New-Order	18.00	18.02	18.06
Payment	3.00	3.02	3.06
Stock Level	2.00	2.02	2.06
Interactive Delivery	2.00	2.02	2.06
Order Status	2.00	2.02	2.06

Table 7 : Think Times

Type	Minimum	Average	Maximum
New-Order	0.00	12.07	120.72
Payment	0.00	12.07	120.71
Stock Level	0.00	5.07	50.71
Interactive Delivery	0.00	5.08	50.71
Order Status	0.00	10.07	100.71

Response Time Frequency Distribution Curves

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

Figure 2.1 : New-Order Response Time Distribution

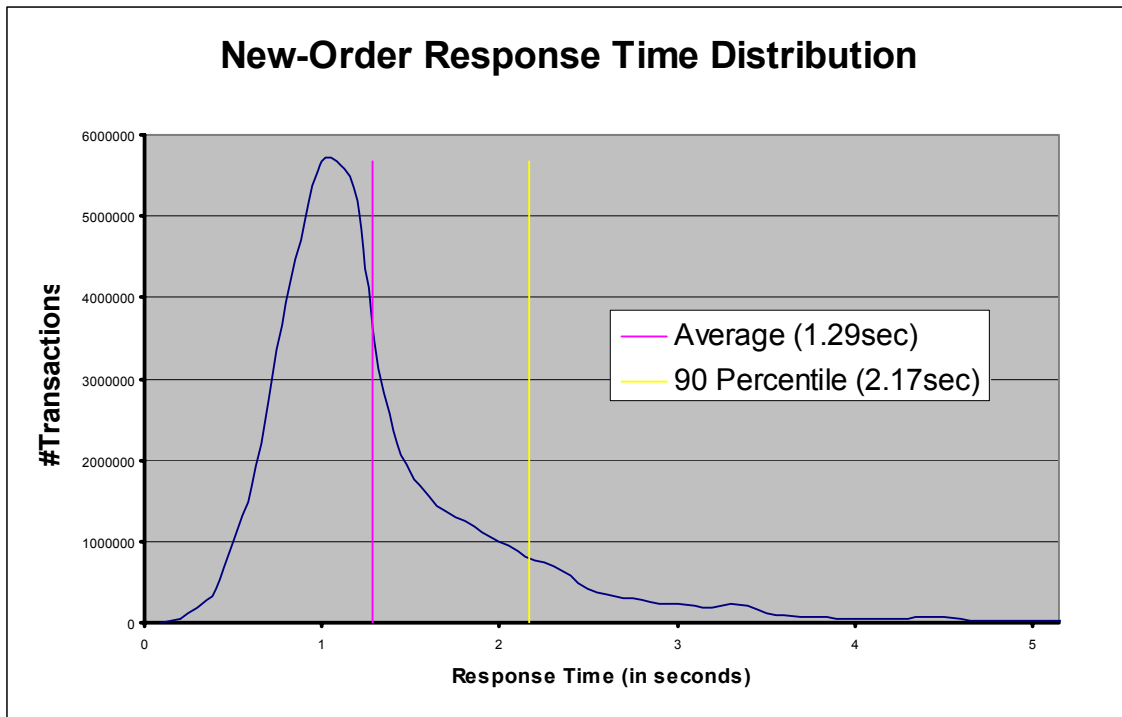


Figure 2.2 : Payment Response Time Distribution

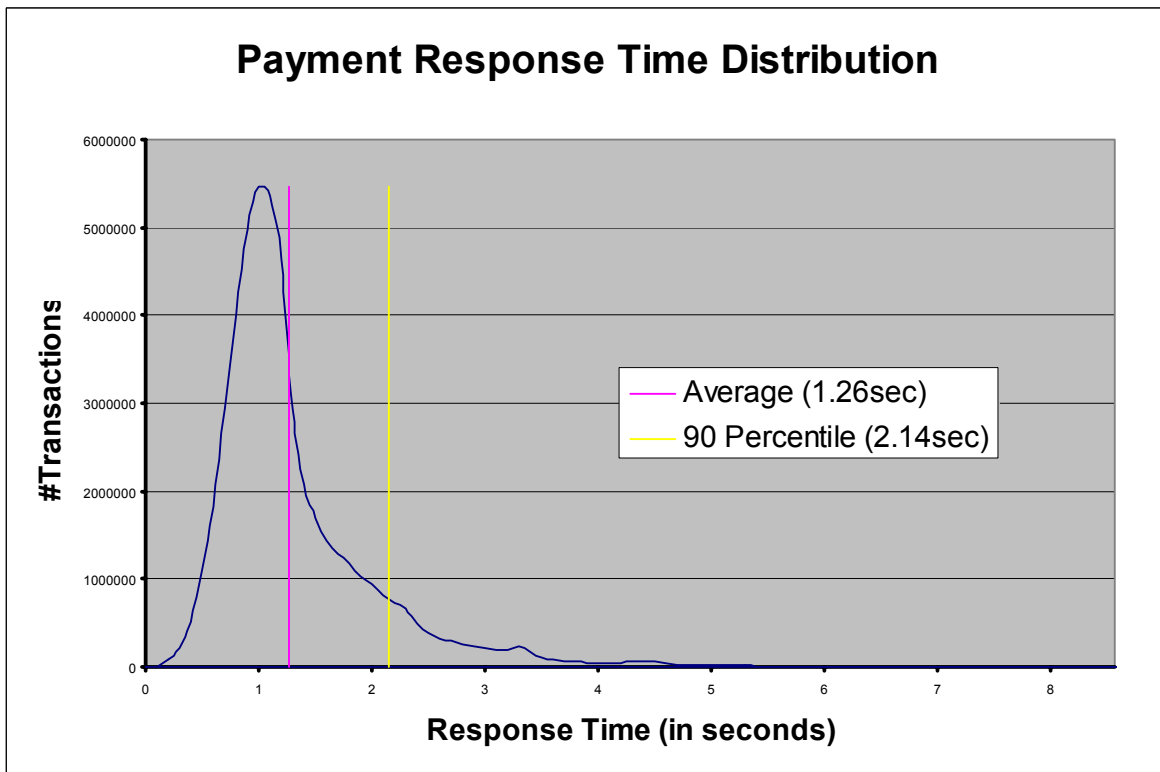


Figure 2.3 : Order-Status Response Time Distribution

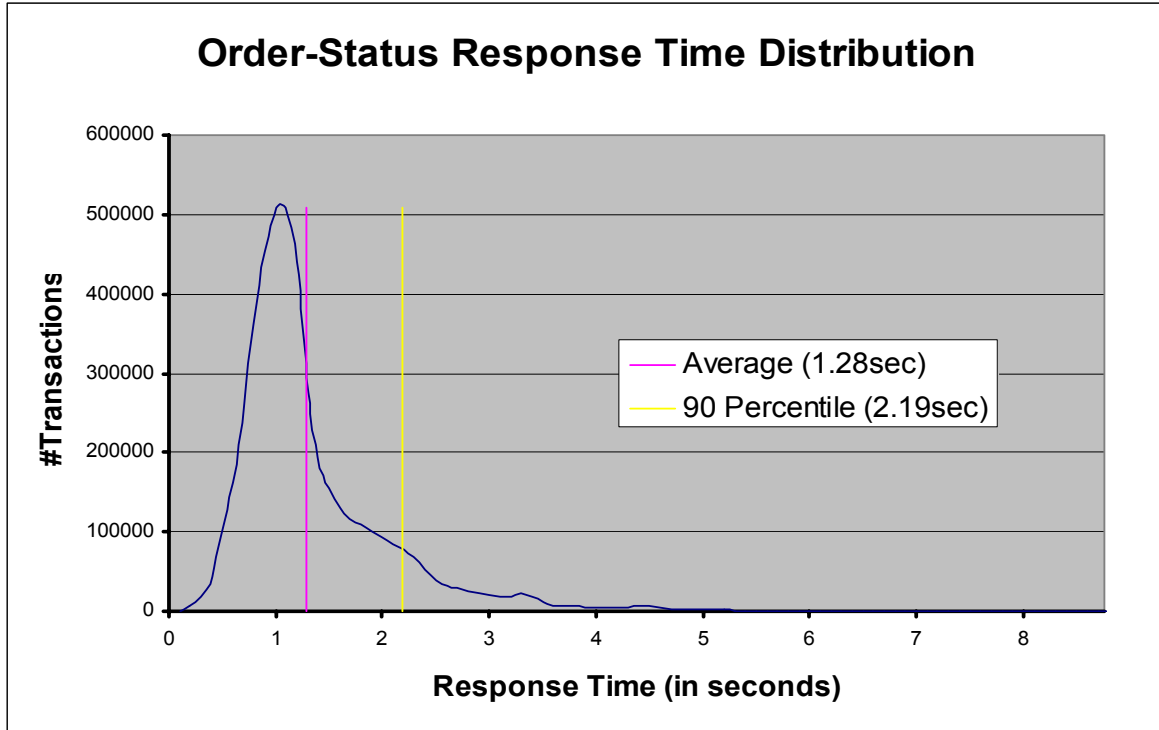


Figure 2.4 : Delivery Response Time Distribution


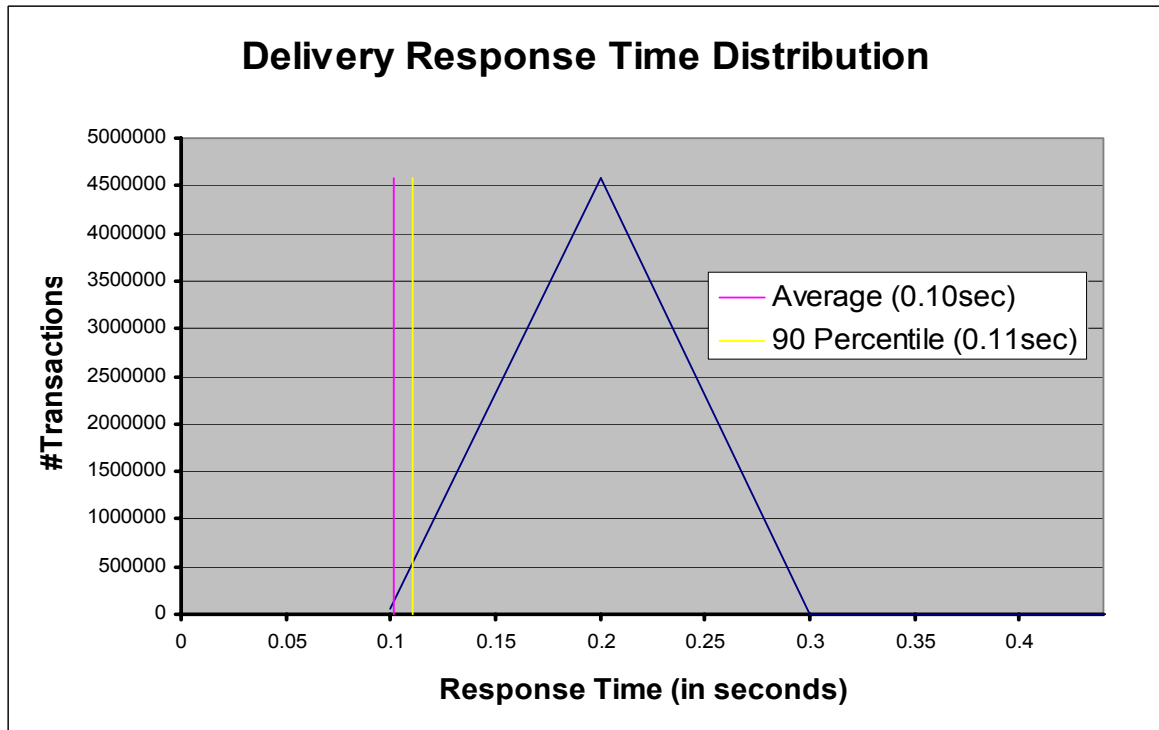



Figure 2.5 : Stock-Level Response Time Distribution

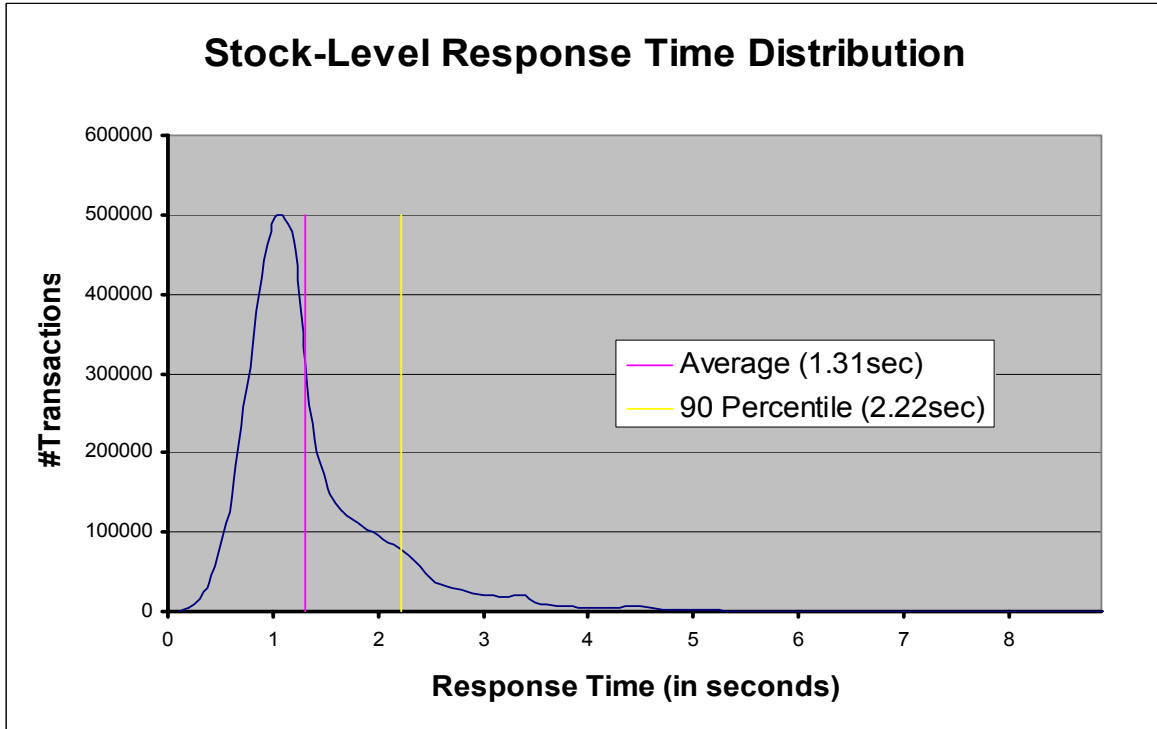

Response time versus Throughput Curve

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.


Figure 2.6 Response Time vs. Throughput Curve

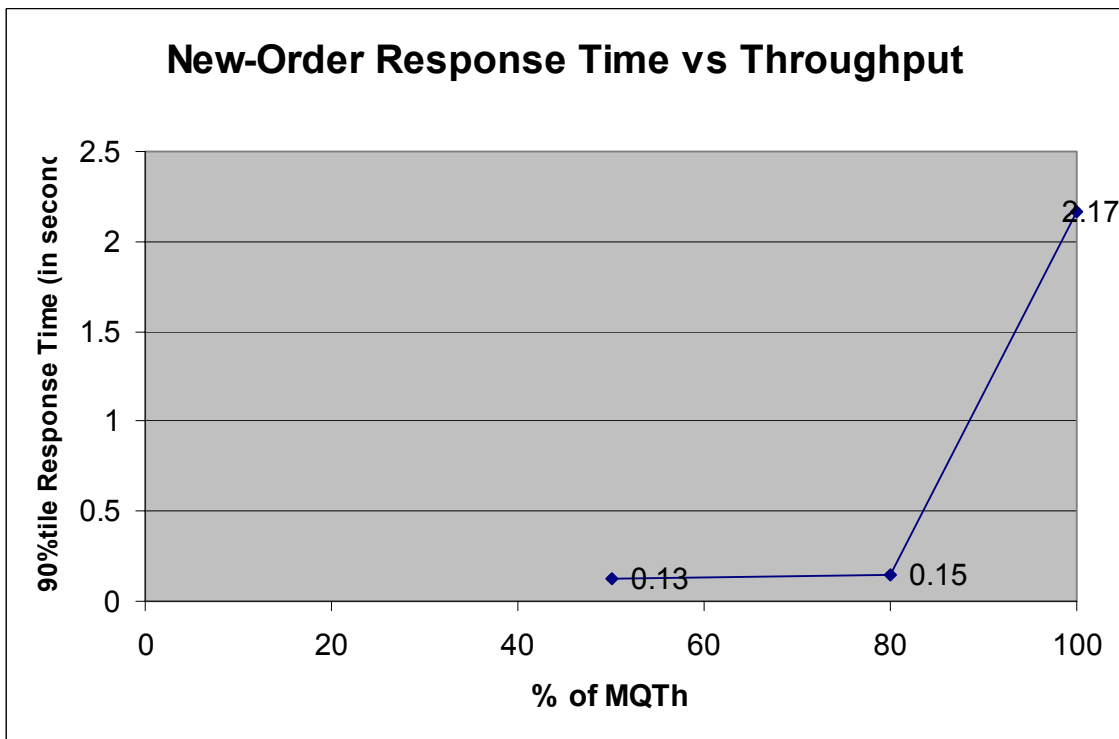

New-Order Think Time Frequency Distribution

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for the New-Order transaction.


Figure 2.7 New-Order Think Time

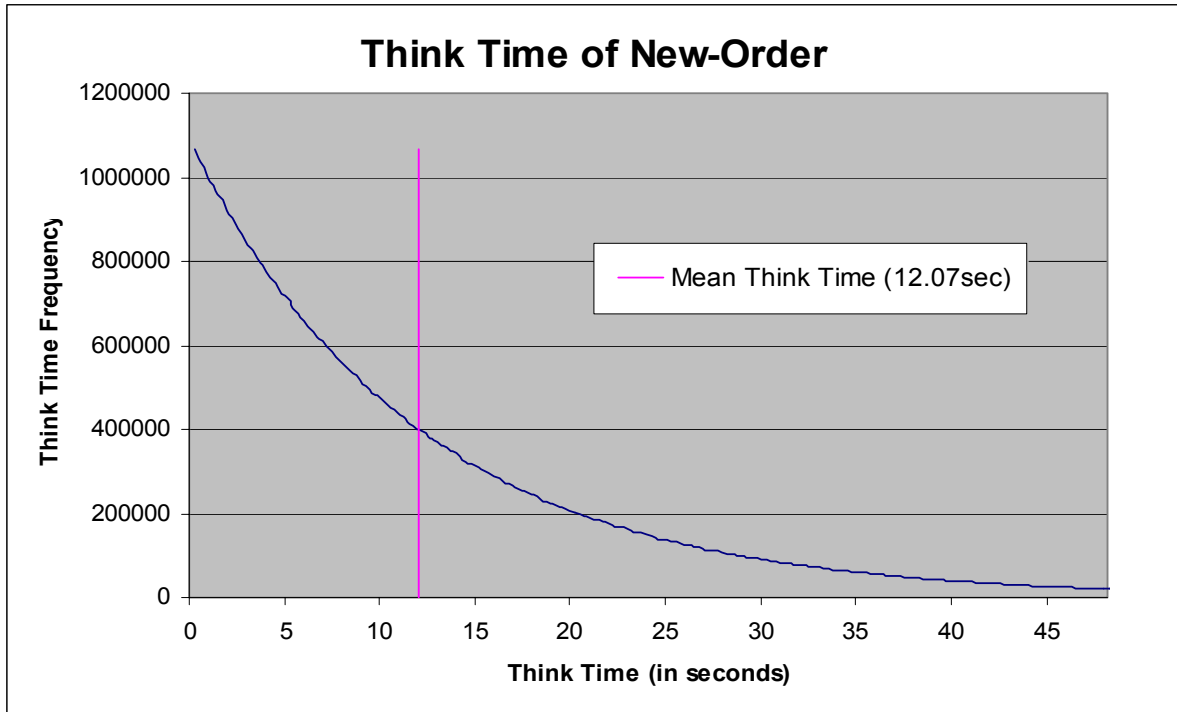

New-Order Throughput vs. Elapsed Time

A graph of throughput versus elapsed time (see Clause 5.6.4) must be reported for the New-Order transaction.

Figure 2.8 New Order Throughput vs. Elapsed Time

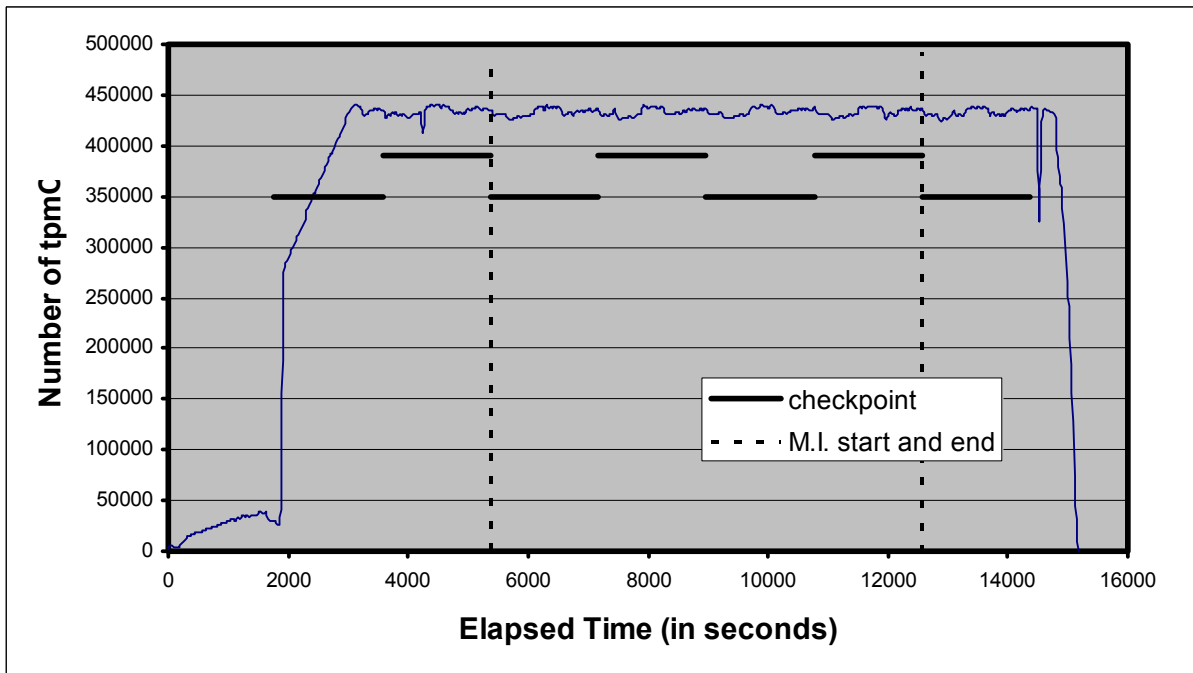

Steady State

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval (see Clause 5.5) must be described.

Steady state was confirmed by the throughput data collected during the run and graphed in Figure 2.8.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.

A checkpoint in Microsoft® SQL Server™ 2000 writes to disk all updated memory pages that have not been yet actually written to disk. SQL Server™ 2000 recovery interval parameter was set to the maximum allowable value to perform checkpoint at specific intervals. A checkpoint script, which issues specified number of checkpoint at specified (30 minutes) intervals, was started after all users logged in and sending transactions.

Measurement Period Duration and Checkpoint Duration

- . The start time and duration in seconds of at least the four (4) longest checkpoints during the Measurement Interval must be disclosed (see Clause 5.5.2.2 (2)).
- . A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

	Start	End	Duration (in second)
M.I.	21:58:45	23:58:45	7200
1 st Checkpoint	21:58:55	22:28:40	1785
2 nd Checkpoint	22:28:54	22:58:39	1785
3 rd Checkpoint	22:58:53	23:28:38	1785
4 th Checkpoint	23:28:52	23:58:37	1785

Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution which could not be adjusted during the run.

Transaction Statistics

- . The percentage of the total mix for each transaction type must be disclosed.
- . The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed.
- . The average number of order-lines entered per New-Order transaction must be disclosed.
- . The percentage of remote order-lines entered per New-Order transaction must be disclosed.
- . The percentage of remote Payment transactions must be disclosed.
- . The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed.
- . The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

The above statistics are disclosed in Table 1.

Checkpoint Count and Location

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint and the Checkpoint Interval must be disclosed.

There was one checkpoint before measurement and four checkpoints during measurement.

The time of the first checkpoint during the measurement interval is 10.79 seconds after the start of the measurement, and the checkpoint interval is 30 minutes.

Clause 6 : SUT, Driver, and Communication Definition Related Items

Descriptions of RTE

The RTE input parameters, code fragments, functions, etc. used to generate each transaction input field must be disclosed.

The RTE used was the Microsoft® BenchCraft RTE System. The RTE input parameters are listed in Appendix C.

Loss of Terminal Connections

The number of terminal connections lost during the Measurement Interval must be disclosed (see Clause 6.6.2).

No terminal connections were lost.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to that of the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

AS configured for this test, the driver software emulates the traffic that would be observed from the users' PCs connected by Ethernet to the front-end clients using HTTP (HyperText Transfer Protocol) over TCP/IP. One tenth of a second (100 milli seconds) was added to each transaction time to compensate for the overhead of the Web browser.

Functional Diagrams and Detail of Driver System

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all software and hardware functionality being performed on the Driver System, and its interface to the SUT must be disclosed (see Clause 6.6.3.6).

The diagrams in figure 1.1 and 1.2 show the tested and priced benchmark configurations.

Network configurations and Driver system

The network configurations of both the tested services and the proposed (target) services which are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed (see Clause 6.6.4).

Figure 1.1 and 1.2 in this report has the network configurations of both the tested system and the priced system.

Network Bandwidth

The bandwidth of the network(s) used in the tested/priced configuration must be disclosed.

The Database server contains eight VI-NIC adapters. The VI-NIC adapters were connected to two FC switches with 2Gbps bandwidth. 23 front-end clients were also connected to these FC switches with 2Gbps bandwidth. Each client has three Ethernet adapters to connect to RTE system . The network bandwidth between RTE system and the front-end clients is 100Mbps. 69 segments were used for the connection of this tested configuration.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 : Pricing Related Items

Hardware and Software Components

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source(s) and effective date(s) of price(s) must also be reported.

The total 3-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The detailed list of all hardware and software for the priced configuration is listed in the system pricing summary.

Availability

The committed delivery date for general availability (availability date) of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available. This single date must be reported on the first page of the Executive Summary. All availability dates, whether for individual components or for the SUT as a whole, must be disclosed to a precision of one day.

The total system as priced will be available June 30, 2003.

Throughput, and Price Performance

A statement of the measured tpmC, as well as the respective calculations for 3-year pricing, price/performance (price/tpmC), and the availability date must be included.

- Maximum Qualified Throughput : 433,107.77 tpmC
- Price per tpmC : \$12.98 per tpmC
- Total 3-year cost of ownership : \$5,619,528

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7.

This system is being priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- *Usage level at which the component was priced.*
- *A statement of the company policy allowing such pricing.*

The component pricing based on usage is shown below:

- 32 SQL Server™ 2000, Enterprise Edition(64-bit), Processor License
- 1 Windows® Server 2003, Datacenter Edition
- 24 Windows®2000 Server, Server License
- 1 Visual C++ Standard

System Pricing

System pricing should include subtotals for the following components: Server Hardware, Server Software, Client Hardware, Client Software, and Network Components.

System pricing must include line item indication where non-sponsoring companies' brands are used. System pricing must also include line item indication of third party pricing.

A detailed list of all hardware and software, including the 3-year price, is provided in the Executive Summary at the front of this report. All third-party quotations are included in Appendix E at the end of this document.

Clause 8 : Audit Related Items

Auditor's Report

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

Next page contains the complete independent auditor's report by Francois Raab of InfoSizing Inc. for the test described in this report.

Availability of the Full Disclosure Report

The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to charges for similar documents by that test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark™ C Full Disclosure Report should be sent to:
Transaction Processing Performance Council
c/o Shanley Public Relations
777 North First Street, Suite 6000
San Jose, CA 95112-6311

Auditor's letter



Sponsor: Jun Suzuki
NEC Corporation
1-10 Nisshincho
Fuchu City Tokyo 183-8501

February 19, 2003

I verified the TPC Benchmark™ C performance of the following Client Server configuration:

Platform: NEC Express5800/1320Xc c/s
Operating system: Microsoft Windows Server 2003 Datacenter Edition
Database Manager: Microsoft SQL Server 2000 Enterprise Edition (64bit)
Transaction Manager: Microsoft COM+

The results were:

CPU's Speed	Memory	Disks	NewOrder 90% Response Time	tpmC
Server: NEC Express5800/1320Xc				
32 x Itanium-2 (1 GHz)	512 GB (3 MB cache/cpu)	1 x 18 GB int. 1122 x 36 GB ext.	2.17 Seconds	433,107.77
Twenty Three Clients: NEC Express 5800/120Re-2 (Specification for each)				
2 x Xeon (1.8 GHz)	1 GB (512 KB cache/cpu)	1 x 18 GB	n/a	n/a

In my opinion, these performance results were produced in compliance with the TPC requirements for Revision 5.1 of the benchmark.

1373 North Franklin Street • Colorado Springs, CO 80903-2527 • Office: 719/473-7555 • Fax: 719/473-7554

The following verification items were given special attention:

- The transactions were correctly implemented
- The database records were the proper size
- The database was properly scaled and populated
- The ACID properties were met
- Input data was generated according to the specified percentages
- The transaction cycle times included the required keying and think times
- The reported response times were correctly measured.
- At least 90% of all delivery transactions met the 80 Second completion time limit
- All 90% response times were under the specified maximums
- The measurement interval was representative of steady state conditions
- The reported measurement interval was 120 minutes
- Four checkpoints were taken during the measurement interval
- The 60 day storage requirement was correctly computed
- The system pricing was verified for major components and maintenance

Additional Audit Notes:

None.

Respectfully Yours,



François Raab, President

1373 North Franklin Street • Colorado Springs, CO 80903-2527 • Office: 719/473-7555 • Fax: 719/473-7554

Appendix A: Application Source Code

webclnt.dsp

```
# Microsoft Developer Studio Project File - Name="webclnt" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 5.00
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Application" 0x0101

CFG=webclnt - Win32 Release
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "webclnt.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE NMAKE /f "webclnt.mak" CFG="webclnt - Win32 Release"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "webclnt - Win32 Release" (based on "Win32 (x86) Application")
!MESSAGE "webclnt - Win32 Debug" (based on "Win32 (x86) Application")
!MESSAGE

# Begin Project
# PROP_Scc_ProjName ""
# PROP_Scc_LocalPath ""
CPP=cl.exe
MTL=ml.exe
RSC=rc.exe

!IF "$ (CFG)" == "webclnt - Win32 Release"

# PROP_BASE Use_MFC 0
# PROP_BASE Use_Debug_Libraries 0
# PROP_BASE Output_Dir ".\Release"
# PROP_BASE Intermediate_Dir ".\Release"
# PROP_BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\Release"
# PROP Intermediate_Dir ".\Release"
# PROP Target_Dir ""
# ADD_BASE CPP /nologo /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /C
# ADD CPP /nologo /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /C
# ADD_BASE MTL /nologo /D "NDEBUG" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyp11b203 /win32
# ADD_BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD_BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD_BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbcc32.lib odbccp32.lib /nologo /subsystem:windows /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib

odbccp32.lib /nologo /subsystem:windows /machine:I386

!ELSEIF "$ (CFG)" == "webclnt - Win32 Debug"

# PROP_BASE Use_MFC 0
# PROP_BASE Use_Debug_Libraries 1
# PROP_BASE Output_Dir ".\Debug"
# PROP_BASE Intermediate_Dir ".\Debug"
# PROP_BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\Debug"
# PROP Intermediate_Dir ".\Debug"
# PROP Target_Dir ""
# ADD_BASE CPP /nologo /w3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/YX /C
# ADD CPP /nologo /w3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX
/FD /C
# ADD_BASE MTL /nologo /D "_DEBUG" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyp11b203 /win32
# ADD_BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD_BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD_BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib

odbcc32.lib odbccp32.lib /nologo /subsystem:windows /debug /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib

odbccp32.lib /nologo /subsystem:windows /debug /machine:I386
```

```
!ENDIF
# Begin Target
# Name "webclnt - Win32 Release"
# Name "webclnt - Win32 Debug"
# End Target
# End Project
```

webclnt.dsw

```
Microsoft Developer Studio Workspace File, Format Version 6.00
# WARNING: DO NOT EDIT OR DELETE THIS WORKSPACE FILE!

#####

Project: "db_dblib_d11"=".\\db_dblib_d11\\db_dblib_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
Package=<4>
{{{
}}}
#####
Project: "db_odbc_d11"=".\\db_odbc_d11\\db_odbc_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
Package=<4>
{{{
}}}
#####
Project: "install"=".\\install\\install.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
Package=<4>
{{{
}}}
#####
Project: "isapi_d11"=".\\isapi_d11\\isapi_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
Package=<4>
{{{
}}}
#####
Project: "tm_com_d11"=".\\tm_com_d11\\tm_com_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tm_encina_d11"=".\\tm_encina_d11\\tm_encina_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tm_tuxedo_d11"=".\\tm_tuxedo_d11\\tm_tuxedo_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tpcc_com_all1"=".\\tpcc_com_all1\\tpcc_com_all1.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tpcc_com_ps"=".\\tpcc_com_ps\\tpcc_com_ps.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tuxapp"=".\\tuxapp\\tuxapp.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Global:
Package=<5>
{{{
}}}
Package=<3>
{{{
}}}
#####
Project: "tm_com_d11"=".\\tm_com_d11\\tm_com_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tm_encina_d11"=".\\tm_encina_d11\\tm_encina_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tm_tuxedo_d11"=".\\tm_tuxedo_d11\\tm_tuxedo_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tpcc_com_all1"=".\\tpcc_com_all1\\tpcc_com_all1.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tpcc_com_ps"=".\\tpcc_com_ps\\tpcc_com_ps.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tuxapp"=".\\tuxapp\\tuxapp.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "webclnt - Win32 Release"=".\\webclnt - Win32 Release\\webclnt.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "webclnt - Win32 Debug"=".\\webclnt - Win32 Debug\\webclnt.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
```

```
}}
Package=<4>
{{{
}}}
#####
Project: "tm_encina_d11"=".\\tm_encina_d11\\tm_encina_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tm_tuxedo_d11"=".\\tm_tuxedo_d11\\tm_tuxedo_d11.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tpcc_com_all1"=".\\tpcc_com_all1\\tpcc_com_all1.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tpcc_com_ps"=".\\tpcc_com_ps\\tpcc_com_ps.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Project: "tuxapp"=".\\tuxapp\\tuxapp.dsp - Package Owner=<4>
Package=<5>
{{{
}}}
#####
Global:
Package=<5>
{{{
}}}
Package=<3>
{{{
}}}
#####
common/src/error.h
/* FILE: ERROR.H Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* Version 4.10.000 audited
* by Richard Gimarc, Performance Metrics, 3/17/99
*
*/
```

```

*          PURPOSE:   Header file for error exception classes.
*
* Change history:
*          4.20.000 - updated rev number to match kit
*          4.21.000 - fixed bug: ~CBaseErr needed to be declared
virtual
*/
#pragma once
#ifdef _INC_STRING
#include <string.h>
#endif
const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;
//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int          iError;
    //error id of message
    char         szMsg[256];
    //message to
    sent to browser
} SERRORMSG;
typedef enum _ErrorLevel
{
    ERR_FATAL_LEVEL           = 1,
    ERR_WARNING_LEVEL        = 2,
    ERR_INFORMATION_LEVEL    = 3
} ErrorLevel;
#define ERR_TYPE_LOGIC          -1
//logic error in program;
#define ERR_SUCCESS            0
//success (a
non-error error)
#define ERR_BAD_ITEM_ID       1
//expected abort record in
txnRecord
#define ERR_TYPE_DELIVERY_POST 2
//expected delivery post failed
#define ERR_TYPE_WEBDLL        3
//tpcc web
generated error
#define ERR_TYPE_SQL           4
//sql server generated
error
#define ERR_TYPE_DBLIB         5
//dblib
generated error
#define ERR_TYPE_ODBC          6
//odbc generated error
#define ERR_TYPE_SOCKET        7
//error on communication
socket client rte only
#define ERR_TYPE_DEADLOCK     8
//dblib and odbc only deadlock condition
#define ERR_TYPE_COM           9
//error from COM call
#define ERR_TYPE_TUXEDO       10
//tuxedo error
#define ERR_TYPE_OS           11
//operating
system error
#define ERR_TYPE_MEMORY       12
//memory allocation error
#define ERR_TYPE_TPCC_ODBC    13
//error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB   14
//error from tpcc dblib
txn module
#define ERR_TYPE_DELISRV     15
//delivery server error
#define ERR_TYPE_TXNLOG      16
//txn log error
#define ERR_TYPE_BCCONN      17
//Benchcraft connection
class
#define ERR_TYPE_TPCC_CONN    18
//Benchcraft connection class
#define ERR_TYPE_ENCINA       19
//Encina error
#define ERR_TYPE_COMPONENT    20
//error from COM component
#define ERR_TYPE_RTE          21
//Benchcraft rte
#define ERR_TYPE_AUTOMATION   22
//Benchcraft automation
errors
#define ERR_TYPE_DRIVER       23
//Driver engine errors
#define ERR_TYPE_RTE_BASE     24
//Framework errors
#define ERR_BUF_OVERFLOW      25
//Buffer overflow during
receive
// TPC-W error types
#define ERR_TYPE_TPCW_CONN    50
//Benchcraft connection class
#define ERR_TYPE_TPCW_HTML    51
//error from Tpcwhtml dll
#define ERR_TYPE_TPCW_USER    52
//error from TPC-W user class
#define ERR_TYPE_TPCW_ENG_BASE 53
#define ERR_TYPE_TPCW_ENG_OS  54

```

```

#define ERR_TYPE_HTML_RESP    55
#define ERR_TYPE_TPCW_ODBC    56
#define ERR_TYPE_SCHANNEL     57
#define ERR_INS_MEMORY        "Insufficient Memory to
continue."
#define ERR_UNKNOWN           "Unknown
error."
#define ERR_MSG_BUF_SIZE      512
#define INV_ERROR_CODE        -1
#define ERR_INS_BUF_OVERFLOW  "Insufficient Buffer size to recieve HTML
pages."
class CBaseErr
{
public:
    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg          = INV_ERROR_CODE;
        if (szLoc)
        {
            m_szLoc = new char[m_szLoc_size];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp          = new char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL), m_szApp,
m_szApp_size);
    }
    CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
    {
        m_idMsg          = idMsg;
        if (szLoc)
        {
            m_szLoc = new char[m_szLoc_size];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp          = new char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL), m_szApp,
m_szApp_size);
    }
    virtual ~CBaseErr(void)
    {
        if (m_szApp) delete [] m_szApp;
        if (m_szLoc) delete [] m_szLoc;
    };
    virtual void Draw(HWND hwnd, LPCTSTR szStr = NULL)
    {
        int          char          j = 0;
        char         szTmp[512];
        if (szStr)
            j = sprintf(szTmp, "%s\n", szStr);
        if (ErrorNum() != INV_ERROR_CODE)
            j += sprintf(szTmp+j, "Error = %d\n",
ErrorNum());
        if (m_szLoc)
            j += sprintf(szTmp+j, "Location = %s\n",
GetLocation());
        j += sprintf(szTmp+j, "%s\n", ErrorText());
        ::MessageBox(hwnd, szTmp, m_szApp, MB_OK);
    }
    char *GetApp(void) { return m_szApp; }
    char *GetLocation(void) { return m_szLoc; }
    virtual int ErrorNum() { return m_idMsg; }
    virtual int ErrorType() = 0; // a value which
distinguishes the kind of error that occurred
    virtual char *ErrorText() = 0; // a string (i.e., human readable)
representation of the error
protected:
    char         *m_szApp;
    char         *m_szLoc; // code location where the error
occurred
    int          m_idMsg;
    //short
    m_errType;
};
class CSocketErr : public CBaseErr
{
public:

```

```

enum Action
{
    eNone = 0,
    eSend,
    eSocket,
    eBind,
    eConnect,
    eListen,
    eHost,
    eRecv,
    eGetHostByName,
    eWSACreateEvent,
    eWSASend,
    eWSASendImage,
    eWSAGetOverlappedResult,
    eWSARecv,
    eWSARecvImage,
    eWSAWaitForMultipleEvents,
    eWSASStartup,
    eWSAResetEvent,
    eNonRetryable,
};
CSocketErr(Action eAction, LPCTSTR szLocation = NULL);
~CSocketErr()
{
    if (m_szErrorText != NULL)
        delete [] m_szErrorText;
};
Action          m_eAction;
char            *m_szErrorText;
int ErrorType() { return ERR_TYPE_SOCKET; };
char *ErrorText(void);
};
class CSystemErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile = 10,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        eBeginThread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
        eRegisterClassEx,
        eCreateWindow,
        eCreateSemaphore,
        eFindFile,
        eRead,
        eWrite,
        eTempFile,
        eSetFilePointer,
        eNew,
    };
    CSystemErr(Action eAction, LPCTSTR
szLocation);
    CSystemErr(int iError, Action eAction,
LPCTSTR szLocation);
    int          ErrorType() { return ERR_TYPE_OS; };
    char         *ErrorText(void);
    Draw(HWND hwnd, LPCTSTR szStr = NULL);
    Action          m_eAction;
private:
    char m_szMsg[ERR_MSG_BUF_SIZE];
};
class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr();
    int ErrorType() {return ERR_TYPE_MEMORY;};
    char *ErrorText() {return ERR_INS_MEMORY;};
};
class CBufferOverflowErr : public CBaseErr
{
public:
    CBufferOverflowErr(int, LPCTSTR);
    int ErrorType() {return ERR_BUF_OVERFLOW;};
};

```

```
}; char *ErrorText() {return ERR_INS_BUF_OVERFLOW;}
```

common/src/ReadRegistry.cpp

```
/* FILE: READREGISTRY.CPP Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* not yet audited
* PURPOSE: Implementation for TPC-C Tuxedo class.
Contact: Charles Levine (clevine@microsoft.com)
* Change history: 4.20.000 - first version
*/
```

```
/* FUNCTION: ReadTPCCRegistrySettings
```

```
* PURPOSE: This function reads the NT registry for startup parameters. There
parameters are under the TPCC key.
* RETURNS FALSE = no errors TRUE = error reading registry
*/
```

```
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg )
```

```
{
    HKEY hkey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE, "SOFTWARE\\Microsoft\\TPCC",
0, KEY_READ, &hkey) != ERROR_SUCCESS )
        return TRUE;
```

```
    // determine database protocol to use; may be either ODBC or DBLIB
    pReg->edb_Protocol = Unspecified;
    size = sizeof(szTmp);
    if ( RegQueryValueEx(hkey, "DB_Protocol", 0, &type, (BYTE *)&szTmp,
&size) == ERROR_SUCCESS )
```

```
{
    if ( !strcmp(szTmp, szDBNames[ODBC]) )
        pReg->edb_Protocol = ODBC;
    else if ( !strcmp(szTmp, szDBNames[DBLIB]) )
        pReg->edb_Protocol = DBLIB;
}
```

```
pReg->eTxnMon = None;
// determine txn monitor to use; may be either TUXEDO, or blank
size = sizeof(szTmp);
if ( RegQueryValueEx(hkey, "TxnMonitor", 0, &type, (BYTE *)&szTmp,
&size) == ERROR_SUCCESS )
```

```
{
    if ( !strcmp(szTmp, szTxnMonNames[TUXEDO]) )
        pReg->eTxnMon = TUXEDO;
    else if ( !strcmp(szTmp, szTxnMonNames[ENCINA]) )
        pReg->eTxnMon = ENCINA;
    else if ( !strcmp(szTmp, szTxnMonNames[COM]) )
        pReg->eTxnMon = COM;
}
```

```
pReg->bCOM_SinglePool = FALSE;
size = sizeof(szTmp);
if ( RegQueryValueEx(hkey, "COM_SinglePool", 0, &type, (BYTE
*)&szTmp, &size) == ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, "YES") )
        pReg->bCOM_SinglePool = TRUE;
}
```

```
pReg->dwMaxConnections = 0;
size = sizeof(dwTmp);
if ( RegQueryValueEx(hkey, "MaxConnections", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
        pReg->dwMaxConnections = dwTmp;
```

```
pReg->dwMaxPendingDeliveries = 0;
size = sizeof(dwTmp);
if ( RegQueryValueEx(hkey, "MaxPendingDeliveries", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
        pReg->dwMaxPendingDeliveries = dwTmp;
```

```
pReg->dwNumberOfDeliveryThreads = 0;
size = sizeof(dwTmp);
if ( RegQueryValueEx(hkey, "NumberOfDeliveryThreads", 0, &type,
(LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
    && (type == REG_DWORD) )
        pReg->dwNumberOfDeliveryThreads = dwTmp;
```

```
size = sizeof(pReg->szPath);
if ( RegQueryValueEx(hkey, "Path", 0, &type, (BYTE *)&pReg->szPath,
&size) != ERROR_SUCCESS )
    pReg->szPath[0] = 0;
```

```
size = sizeof(pReg->szDBServer);
if ( RegQueryValueEx(hkey, "DbServer", 0, &type, (BYTE *)&pReg-
>szDBServer, &size) != ERROR_SUCCESS )
    pReg->szDBServer[0] = 0;
```

```
size = sizeof(pReg->szDBName);
if ( RegQueryValueEx(hkey, "DbName", 0, &type, (BYTE *)&pReg-
>szDBName, &size) != ERROR_SUCCESS )
    pReg->szDBName[0] = 0;

size = sizeof(pReg->szDBUser);
if ( RegQueryValueEx(hkey, "DbUser", 0, &type, (BYTE *)&pReg-
>szDBUser, &size) != ERROR_SUCCESS )
    pReg->szDBUser[0] = 0;

size = sizeof(pReg->szDBPassword);
if ( RegQueryValueEx(hkey, "DbPassword", 0, &type, (BYTE *)&pReg-
>szDBPassword, &size) != ERROR_SUCCESS )
    pReg->szDBPassword[0] = 0;

RegCloseKey(hkey);

return FALSE;
}
```

common/src/ReadRegistry.h

```
/* FILE: ReadRegistry.h Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* not audited
* PURPOSE: Header for registry related code.
* Change history: 4.20.000 - first version
*/
```

```
enum DBPROTOCOL { Unspecified, ODBC, DBLIB };
const char *szDBNames[] = { "Unspecified", "ODBC", "DBLIB" };
```

```
enum TXNMON { None, TUXEDO, ENCINA, COM };
const char *szTxnMonNames[] = { "NONE", "TUXEDO", "ENCINA", "COM" };
```

```
/** This structure defines the data necessary to keep distinct for each terminal
or client connection.
typedef struct _TPCCREGISTRYDATA
```

```
{
    enum DBPROTOCOL edb_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDBServer[32];
    char szDBName[32];
    char szDBPassword[32];
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;
```

```
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg );
```

common/src/trans.h

```
/* FILE: TRANS.H Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* Version 4.10.000 audited
* by Richard Gimarc, Performance Metrics, 3/17/99
```

```
* PURPOSE: Header file for TPC-C structure templates.
```

```
* Change history: 4.20.000 - updated rev number to match kit
*/
#pragma once
```

```
/* String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 10
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 10
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define DATETIME_LEN 30
#define CREDIT_LEN 2
```

```
#define C_DATA_LEN 250
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
```

```
/** TIMESTAMP_STRUCT is provided by the ODBC header file sqltypes.h, but is not
available
when compiling with dblib, so redefined here. Note: we are using the symbol
SQLTYPES (declared in sqltypes.h) as a way to determine if TIMESTAMP_STRUCT has been
declared.
*/
typedef struct
```

```
{
    /* SQLSMALLINT */
    short year;
    unsigned short /*
SQLSMALLINT */ month;
    /*
SQLSMALLINT */ day;
    /*
SQLSMALLINT */ hour;
    /*
SQLSMALLINT */ minute;
    /*
SQLSMALLINT */ second;
    unsigned long /* SQUINTEGER */
} TIMESTAMP_STRUCT;
```

```
enum EXEC_STATUS
```

```
{
    /* possible values for exec_status_code after transaction completes
enum EXEC_STATUS
{
    committed, eOK, // 0 "transaction
    eInvalidItem, // 1 "Item number is not valid."
    eDeliveryFailed, // 2 "Delivery Post Failed."
};
```

```
/** transaction structures
```

```
typedef struct
{
    /* input params
    short ol_supply_w_id;
    long ol_i_id;
    short ol_quantity;
    /* output params
    char ol_i_name[T_NAME_LEN+1];
    char ol_brand_generic[BRAND_LEN+1];
    double ol_i_price;
    double ol_amount;
    short ol_stock;
} OL_NEW_ORDER_DATA;
```

```
typedef struct
```

```
{
    /* input params
    short w_id;
    short d_id;
    long c_id;
    short o_ol_cnt;
    /* output params
    EXEC_STATUS exec_status_code;
    char c_last[LAST_NAME_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double total_amount;
    double w_tax;
    double d_tax;
    short o_id;
```

```
EXEC_STATUS exec_status_code;
char c_last[LAST_NAME_LEN+1];
char c_credit[CREDIT_LEN+1];
double total_amount;
double w_tax;
double d_tax;
short o_id;
```

```
o_commit_flag;
TIMESTAMP_STRUCT o_entry_d;
short o_all_local;
double o_ol_total;
double OL_NEW_ORDER_DATA OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;
```

```
typedef struct
```

```
{
    /* input params
    short w_id;
    short d_id;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    char c_last[LAST_NAME_LEN+1];
    /* output params
    EXEC_STATUS exec_status_code;
    TIMESTAMP_STRUCT h_date;
    char w_street_1[ADDRESS_LEN+1];
    char w_street_2[ADDRESS_LEN+1];
    char w_city[ADDRESS_LEN+1];
    char w_state[STATE_LEN+1];
    char w_zip[ZIP_LEN+1];
    char d_street_1[ADDRESS_LEN+1];
    char d_street_2[ADDRESS_LEN+1];
    char d_city[ADDRESS_LEN+1];
    char d_state[STATE_LEN+1];
```

```

char d_zip[ZIP_LEN+1];
char c_first[FIRST_NAME_LEN+1];
char c_street_1[ADDRESS_LEN+1];
char c_street_2[ADDRESS_LEN+1];
char c_city[ADDRESS_LEN+1];
char c_state[STATE_LEN+1];
char c_zip[ZIP_LEN+1];
char c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT c_since;
char c_credit[CREDIT_LEN+1];
double c_credit_lim;
double c_discount;
double c_balance;
char c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;
typedef struct
{
    long ol_i_id;
    short ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    TIMESTAMP_STRUCT ol_delivery_d;
} OL_ORDER_STATUS_DATA;
typedef struct
{
    // input params
    short w_id;
    short d_id;
    long c_id;
    char c_last[LAST_NAME_LEN+1];
    // output params
    EXEC_STATUS exec_status_code;
    char c_first[FIRST_NAME_LEN+1];
    char c_middle[MIDDLE_NAME_LEN+1];
    double c_balance;
    long o_id;
    TIMESTAMP_STRUCT o_entry_d;
    short o_carrier_id;
    OL_ORDER_STATUS_DATA ol[MAX_OL_ORDER_STATUS_ITEMS];
    short o_ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;
typedef struct
{
    // input params
    short w_id;
    short o_carrier_id;
    // output params
    EXEC_STATUS exec_status_code;
    SYSTEMTIME queue_time;
    long o_id[10];
} DELIVERY_DATA, *PDELIVERY_DATA;
// This structure is used for posting delivery transactions and for writing them
// to the delivery server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME queue; //time
    short w_id;
    short //delivery warehouse
    short o_carrier_id; //carrier id
} DELIVERY_TRANSACTION;
typedef struct
{
    // input params
    short w_id;
    short d_id;
    short threshold;
    // output params
    EXEC_STATUS exec_status_code;
    long low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

common/src/txn_base.h

```

/* FILE: TXN_BASE.H
 * Microsoft TPC-C Kit Ver.
 * 4.20.000 Copyright Microsoft, 1999
 * All Rights Reserved
 * Version 4.10.000 audited
 * by Richard Gimarc, Performance Metrics, 3/17/99
 * PURPOSE: Header file for TPC-C txn class implementation.
 * Change history: 4.20.000 - updated rev number to match kit
 */
#pragma once
// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )

```

```

#endif
class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};
    virtual PNEW_ORDER_DATA = 0;
    virtual PPAYMENT_DATA = 0;
    virtual PDELIVERY_DATA = 0;
    virtual PSTOCK_LEVEL_DATA BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA BuffAddr_OrderStatus() = 0;
    virtual void NewOrder() = 0;
    virtual void Payment() = 0;
    virtual void Delivery() = 0;
    virtual void StockLevel() = 0;
    virtual void OrderStatus() = 0;
};

```

common/txnlog/include/rtetime.h

```

/* FILE: rtetime.h : header file
 * Copyright 1997 Microsoft Corp., All rights reserved.
 * Source code licensed to Tandem Computers for Internal
 * use only. Redistribution of source or object files or
 * any derivative works is prohibited. By agreement, this
 * notice may not be removed.
 * Authors: Charles Levine, Philip Durr
 * Microsoft Corp.
 */
//FILE: RTETIME.H
#define MAX_JULIAN_TIME 0x7FFFFFFF
#define JULIAN_TIME __int64
#define TC_TIME DWORD
extern "C"
{
    BOOL InitJulianTime(LPSYSTEMTIME lpInitTime);
    JULIAN_TIME GetJulianTime(void);
    DWORD MyTickCount(void);
    void GetJulianAndTC(JULIAN_TIME *pJulian, DWORD *pTC);
    JULIAN_TIME ConvertTo64BitTime(int iYear, int iMonth, int iDay, int iHour, int iMinute, int iSecond);
    JULIAN_TIME Get64BitTime(LPSYSTEMTIME lpInitTime);
    int JulianDay(int yr, int mm, int dd);
    void JulianToTime(JULIAN_TIME julians, int* yr, int* mm, int* dd, int* hh, int* mi, int* ss);
    void JulianToCalendar(int day, int* yr, int* mm, int* dd);
}

```

common/txnlog/include/spinlock.h

```

/* FILE: SPINLOCK.H
 * Copyright 1997 Microsoft Corp., All rights reserved.
 * Source code licensed to Tandem Computers for Internal
 * use only. Redistribution of source or object files or
 * any derivative works is prohibited. By agreement, this
 * notice may not be removed.
 * Authors: Mike Parkes, Charles Levine, Philip Durr
 * Microsoft Corp.
 */
#ifdef _INC_Spinlock
const LONG LockClosed = 1;
const LONG LockOpen = 0;
// Spinlock and Semaphore locking.
// This class provides a very conservative locking scheme.
// The assumption behind the code is that locks will be
// held for a very short time. When a lock is taken a memory
// location is exchanged. All other threads that want this
// lock wait by spinning and sometimes sleeping on a semaphore
// until it becomes free again. The only other choice is not
// to wait at all and move on to do something else. This
// module should normally be used in conjunction with cache
// aligned memory in minimize cache line misses.
class Spinlock
{
public:
    // Private data.
    HANDLE hSpinlock;
    Semaphore;
};

```

```

volatile LONG m_Spinlock;
volatile LONG Waiting;
#ifdef _DEBUG
// Counters for debugging builds.
volatile LONG TotalLocks;
volatile LONG TotalSleeps;
volatile LONG TotalSpins;
volatile LONG TotalWaits;
#endif
public:
// Public functions.
Spinlock( void );
inline BOOL ClaimLock( BOOL wait = TRUE );
inline void ReleaseLock( void );
// Disabled operations.
Spinlock( const Spinlock & Copy );
void operator=( const Spinlock & Copy );
private:
// Private functions.
inline BOOL ClaimSpinlock( volatile LONG *s1 );
void WaitForLock( void );
void WakeAllSleepers( void );
};
// A guaranteed atomic exchange.
// An attempt is made to claim the Spinlock. This action is
// guaranteed to be atomic.
inline BOOL Spinlock::ClaimSpinlock( volatile LONG *spinlock )
{
#ifdef _DEBUG
    InterlockedIncrement( (LPLONG) &
        TotalLocks );
#endif
    return ( (*spinlock) == LockOpen ) &&
        ( InterlockedExchange( (LPLONG)spinlock, LockClosed ) == LockOpen );
}
// Claim the Spinlock.
// Claim the lock if available else wait or exit.
inline BOOL Spinlock::ClaimLock( BOOL wait )
{
    if ( ! ClaimSpinlock( (volatile LONG*) &
        m_Spinlock ) )
    {
        if ( wait )
            WaitForLock();
        return wait;
    }
    return TRUE;
}
// Release the spinlock.
// Release the lock and if needed wakeup any sleepers.
inline void Spinlock::ReleaseLock( void )
{
    m_Spinlock = LockOpen;
    if ( waiting > 0 )
        WakeAllSleepers();
}
#define _INC_Spinlock
#endif

```

common/txnlog/include/txnlog.h

```

/* FILE: TXNLOG.H
 * Microsoft TPC-C Kit Ver.
 * 4.10.000 not yet audited
 * PURPOSE: Header file for txn log class
 * Copyright Microsoft, 1999
 * All Rights Reserved
 */
#pragma once
typedef struct _TXN_NEWORDER
{

```

```

BYTE OL_Count; //range 0 to 31
BYTE OL_Remote_Count; //range 0 to 31
WORD c_id;
int o_id;
} TXN_NEWORDER;

typedef struct _TXN_PAYMENT
{
    BYTE CustByName;
    BYTE IsRemote;
} TXN_PAYMENT;

typedef struct _TXN_ORDERSTATUS
{
    BYTE CustByName;
} TXN_ORDERSTATUS;

typedef union _TXN_DETAILS
{
    TXN_NEWORDER NewOrder;
    TXN_PAYMENT Payment;
    TXN_ORDERSTATUS OrderStatus;
} TXN_DETAILS;

// Common header for all records in txn log. The TxnType field is
// a switch which identifies the particular variant.
#define TXN_REC_TYPE_CONTROL 1
#define TXN_REC_TYPE_TPCC 2
// replaces TRANSACTION_TYPE_TPCC
#define TXN_REC_TYPE_TPCC_DELIV_DEF 3

typedef struct _TXN_RECORD_HEADER
{
    JULIAN_TIME TxnStartT0; // start of
    BYTE TxnType; // one of TXN_REC_TYPE_*
    BYTE TxnSubType; // depends on TxnType
} TXN_RECORD_HEADER, *PTXN_RECORD_HEADER;

typedef struct _TXN_RECORD_CONTROL
{
    // common header; must exactly match
    JULIAN_TIME TxnStartT0; // start of
    BYTE TxnType; // = TXN_REC_TYPE_CONTROL
    BYTE TxnSubType; // depends on TxnType
    // end of common header

    DWORD Len;
    // number of bytes after this field
} TXN_RECORD_CONTROL, *PTXN_RECORD_CONTROL;

// TPC-C Txn Record Layout:
//TxnStartT0' is a Julian timestamp corresponding to the moment the
//txn is sent to the SUT, i.e., beginning of response time. Deltas
//are in milliseconds. Note that if RTDelay > 0, then the txn was
//delayed by this amount. The delay occurs at the beginning of the
//response time. So if RTDelay > 0, then the txn was actually sent
//at TxnStartT0 + RTDelay.
//Graphically:
//
// time -->
//
// |--- Menu ---|--- Keying ---|--- Response ---|--- Think ---|
// |<- Delta1 ->|<- Delta2 ->|<- Delta3 ->|<- Delta4 ->|
//
// ^
// TxnStartT0
//
//RTDelay is the amount of response time delay included in Delta4.
//RTDelay is recorded per txn because this value can be changed on
//the fly, and so may vary from txn to txn.
//TxnStatus is the txn completion code. It is used to indicate errors.
//For example, in the New Order txn, 1% of txns abort. TxnStatus will
//reflect this.

typedef struct _TXN_RECORD_TPCC
{
    // common header; must exactly match
    JULIAN_TIME TxnStartT0; // start of
    BYTE TxnType; // = TXN_REC_TYPE_TPCC
    BYTE TxnSubType; // depends on TxnType
    // end of common header

    int DeltaT1; // menu time
    int DeltaT2; // keying
    int DeltaT3; // think time
    int DeltaT4; // response
    int RTDelay; // response

    int TxnError;
    // error code providing more detail for TxnStatus
    int w_id;
}

```

```

// warehouse ID
// assigned district ID for this thread
// district ID chosen for
this particular
status for txn to indicate errors
alignment
} TXN_RECORD_TPCC, *PTXN_RECORD_TPCC;

// TPC-C Deferred Delivery Txn Record Layout:
//incorporating delivery transaction information into the above
//structure would increase the size of TXN_DETAILS from 8 to 42
bytes.
//hence, we store delivery transaction details in a separate structure.
typedef struct _TXN_RECORD_TPCC_DELIV_DEF
{
    // common header; must exactly match
    JULIAN_TIME TxnStartT0; // start of
    BYTE TxnType; // = TXN_REC_TYPE_TPCC_DELIV_DEF
    BYTE TxnSubType; // = 0
    // end of common header
    int DeltaT4; // response
    int DeltaTxnExec; // execution
    int w_id; // warehouse ID
    BYTE TxnStatus; // completion
    BYTE reserved; // for word
    short o_carrier_id; // carrier id
    long o_id[10]; // returned
} TXN_RECORD_TPCC_DELIV_DEF, *PTXN_RECORD_TPCC_DELIV_DEF;

#define TXN_LOG_VERSION 2
#define TXN_DATA_START 4096
// offset in log file where log records start
#define TXN_LOG_EYE_CATCHER "BC" // signature
bytes at the start of log file

////////////////////////////////////
// The transaction log has a header as the first 4K block.
typedef struct _TXN_LOG_HEADER
{
    char EyeCatcher[2]; // signature bytes; should always be
    int LogVersion; // set to TXN_LOG_VERSION
    JULIAN_TIME BeginTxnTS; // timestamp of first (lowest) txn start
    JULIAN_TIME EndTxnTS; // timestamp of last (highest) txn completion time
    int iRecCount; // number of records in log file
    BOOL bLogSorted; // log sorted?
    int iFileSize; // file size in bytes

    // the record map provides a fast way to get close to
    // a particular timestamp in a sorted log file.
    struct {
        JULIAN_TIME TS; // timestamp of record
        int iPos; // byte position in file
    } RecMap[RecMapSize];
#define RecMapSize 200
} TXN_LOG_HEADER, *PTXN_LOG_HEADER;

/* Header of the sorted pointers blocks in Temp file (in merging).
typedef struct BLOCK_HEADER {
    long blockPos;
    int64 CurPos;
    DWORD BytesRead;
    int nRecords;
    BYTE *offset; // *offset of pointers to
} BLOCK_HEADER, *PBLOCK_HEADER;

#define READ_BUFFER_SIZE 64*1024
#define WRITE_BUFFER_SIZE 8*1024

#define NUM_READ_BUFFERS 1
#define NUM_WRITE_BUFFERS 2
#define MAX_NUM_BUFFERS 2

// flags passed in to the constructor
#define TXN_LOG_WRITE 0x01

```

```

#define TXN_LOG_READ 0x02
#define TXN_LOG_SORTED 0x04
#define TXN_LOG_CRASHOPEN 0x08 // if set, invalid headers
// will be tolerated; used for recovery

#define TXN_LOG_OS_ERROR 1
#define TXN_LOG_NOT_SORTED 2

#define SKIP_CTRL_RECS 1

class CTxnLog
{
private:
    DWORD iBuffersize; //buffer allocated size
    DWORD iBytesFreeInBuffer; //total bytes available for use in buffer
    int iNumBuffers; //buffers in use
    int iActiveBuffer; //indicates which buffer is active: 0 or 1
    int iIoBuffer; //buffer for any pending IO operation
    int iFilePointer; //position in file
    int iNextRec; //position in file
    int iNextRec; //when reading, ordinal value of next record

    // A "save point" is remembered each time
    // the next time it is called, if start time is after
    // save point. This is particularly useful in
    // FindBestInterval, where the log is scanned repeatedly.
    int iSavePtFilePointer;
    LARGE_INTEGER iSavePtFilePointer;
    int iSavePtNextRec;
    JULIAN_TIME iLastTS;
    //when writing sorted output, used to verify records
    //are sorted
    BOOL bWrite; //writing log file
    BOOL bCrashOpen; //tolerate bad headers and consistency checks
    BOOL bLogSorted; //is log file sorted? applies to both input and output
    JULIAN_TIME BeginTxnTS; // timestamp of first (lowest) txn start
    JULIAN_TIME EndTxnTS; // timestamp of last (highest) txn completion time
    int iRecCount; // number of records in log file
    BYTE *pCurrent; //ptr to current buffer
    BYTE *pBuffer[MAX_NUM_BUFFERS]; //transaction record pointer array for sort
    PTXN_RECORD_HEADER *TxnArray;
    HANDLE hTxnFile; //handle to log file
    HANDLE hMapFile; //map file used when sorting the log
    HANDLE hIoComplete; //event to signify that there are no pending IOs
    HANDLE hLogFileIo; //event to signal the IO thread to write the inactive buffer
    SpinLock Spin;
    //spin lock to protect the txn log file buffers
    FILE *tmpFile; //temp file for merging sorted pieces
    PBLOCK_HEADER tmpHeaders; //sorted pointers block header
    BYTE **recPointers; //record pointer buffers for each sorted block
    PTXN_RECORD_HEADER *recBuffers; //record buffers for each sorted block
    int *PointersRead; //# of pointers processed in each block
    BOOL *blockAvailable; //whether to check a particular block for jmin
    int nBlocks;
    int jmin; //index (block-wise) of the lowest timestamp record
    int iAvgRecordLen; //average record length
    int iSortedReturnedCount; //keeps track of the # of sorted records returned through GetSortedRecord()
    int write(BYTE *ptr, DWORD size);
}

```

```

static void LogFileIO(CTXNLog *);

//used in sort/merge to load record buffers
public:
    CTXNLog::CTXNLog(LPCTSTR szFileName, DWORD dwOpts);
    ~CTXNLog(void);

    int writeToLog(PTXN_RECORD_TPCC pTxnRcd);
    int writeToLog(PTXN_RECORD_TPCC_DELIV_DEF pTxnRcd);
    int writeToLog(PTXN_RECORD_CONTROL pCtrlRec);
    int writeToLog(PTXN_RECORD_HEADER pCtrlRec);

    int writeCtrlRecToLog(BYTE SubType, LPCTSTR lpStr,
        DWORD dwLen);

    void CloseTransactionLogFile(void);

    PTXN_RECORD_HEADER GetNextRecord(BOOL bSkipCtrlRecs =
        FALSE);
    PTXN_RECORD_HEADER GetNextRecord(JULIAN_TIME
        SeekTime0, BOOL bSkipCtrlRecs = FALSE);

    int Sort(void);
    PTXN_RECORD_HEADER GetSortedRecord();

    inline BOOL IsSorted(void) { return blogSorted; };
    inline JULIAN_TIME BeginTS(void) { return
        BeginTxnTS; };

    inline JULIAN_TIME EndTS(void) { return EndTxnTS; };
    inline int RecordCount(void) { return iRecCount; };

class CTXNLOG_ERR : public CBaseErr
{
public:
    enum CTXNLOG_ERRS
    {
        ERR_BAD_FILE_FORMAT,
        // "File format is invalid."
        ERR_UNKNOWN_LOG_VERSION, // "Log file
        version is unknown."
        ERR_BROKEN_LOG_FILE,
        // "Log file is broken."
        ERR_LOG_NOT_SORTED,
        // "Log file is not sorted"
        ERR_INVALID_TIME_SEQ,
        // "Internal Error: Record Time Sequence invalid."
    };

    CTXNLOG_ERR(int iErr) : CBaseErr(iErr) {};
    int errType() { return ERR_TYPE_TXNLOG; };

    char *ErrorText()
    {
        static char *szMsgs[] = {
            "File format is invalid.",
            "Log file version is
            unknown.",
            "Log file is broken.",
            "Log file is not sorted",
            "Internal Error: Record
            Time Sequence invalid.",
            ""
        };

        for(int i = 0; szMsgs[i][0]; i++)
        {
            if ( m_idMsg == i )
                break;
        }

        return(szMsgs[i] ? szMsgs[i] :
            ERR_UNKNOWN);
    };
};

```

db_dblib_dll/db_dblib_dll.dsp

```

# Microsoft Developer Studio Project File - Name="db_dblib_dll" - Package
Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "win32 (x86) dynamic-link library" 0x0102

CFG=db_dblib_dll - win32 IceCAP
MESSAGE This is not a valid makefile. To build this project using NMAKE,
MESSAGE use the Export Makefile command and run
MESSAGE
MESSAGE NMAKE /f "db_dblib_dll.mak".
MESSAGE
MESSAGE You can specify a configuration when running NMAKE
MESSAGE by defining the macro CFG on the command line. For example:
MESSAGE NMAKE /f "db_dblib_dll.mak" CFG="db_dblib_dll - win32 IceCAP"
MESSAGE Possible choices for configuration are:
MESSAGE
MESSAGE "db_dblib_dll - win32 Release" (based on "win32 (x86) Dynamic-Link
MESSAGE Library")
MESSAGE "db_dblib_dll - win32 Debug" (based on "win32 (x86) Dynamic-Link
MESSAGE Library")
MESSAGE "db_dblib_dll - win32 IceCAP" (based on "win32 (x86) Dynamic-Link
MESSAGE Library")

```

```

!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$CFG" == "db_dblib_dll - win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX
/ FD /c
# ADD CPP /nologo /MD /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD
/c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbcc32.lib odbccp32.lib /nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 ntwdblib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

/nologo /subsystem:windows /dll /machine:I386 /out:".bin\tpcc_dblib.dll"

!ELSEIF "$CFG" == "db_dblib_dll - win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /w3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D
_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /w3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbcc32.lib odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386
/pdbtype:sept
# ADD LINK32 ntwdblib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

/nologo /subsystem:windows /dll /debug /machine:I386 /out:".bin\tpcc_dblib.dll"
/pdbtype:sept

!ELSEIF "$CFG" == "db_dblib_dll - win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "db_dblib"
# PROP BASE Intermediate_Dir "db_dblib"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MDd /w3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D
_WINDOWS" /YX /FD /Gh /c
# ADD CPP /nologo /MDd /w3 /Gm /GX /ZI /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS"
/D "ICECAP" /YX /FD /Gh /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 ntwdblib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib

uuid.lib /nologo /subsystem:windows /dll /debug /machine:I386
/out:".bin\tpcc_dblib.dll" /pdbtype:sept
# ADD LINK32 icap.lib ntwdblib.lib kernel32.lib user32.lib gdi32.lib

```

```

winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib /nologo /subsystem:windows /dll /debug /machine:I386
/out:".bin\tpcc_dblib.dll" /pdbtype:sept

!ENDIF

# Begin Target

# Name "db_dblib_dll - win32 Release"
# Name "db_dblib_dll - win32 Debug"
# Name "db_dblib_dll - win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.cpp"
# Begin Source File

SOURCE=.\src\tpcc_dblib.cpp
# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*.h"
# Begin Source File

SOURCE=.\common\src\error.h
# End Source File
# Begin Source File

SOURCE=.\src\tpcc_dblib.h
# End Source File
# Begin Source File

SOURCE=.\common\src\trans.h
# End Source File
# Begin Source File

SOURCE=.\common\src\txn_base.h
# End Source File
# End Group
# End Target
# End Project

```

db_dblib_dll/src/tpcc_dblib.cpp

```

/* FILE: TPCC,DBLIB.CPP Microsoft TPC-C kit ver.
4.20.000 Copyright Microsoft, 1999
*
* All Rights Reserved
*
* Version 4.10.000 audited
* by Richard Gimarc, Performance Metrics, 3/17/99
*
* PURPOSE: Implements dblib calls for TPC-C txns.
* Contact: Charles Levine (clevine@microsoft.com)
*
* Change history:
* 4.20.000 - updated rev number to match kit
* 4.10.001 - not deleting error class in catch handler
on deadlock retry; not a functional bug,
but a memory leak - had to tweak some
declarations to compile with latest SDK; no functional change
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBTWIN32
#include <sqlfront.h>
#include <sqldb.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE 4096

// version string; must match return value from tpcc_version stored proc
const char sVersion[] = "4.10.000";

const int iMaxRetries = 10;
static long iConnectionCount = 0; // number of current dblib
connections

const int iErr0leDbProvider = 7312;
const char sErrTimeoutExpired[] = "timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD ul_reason_for_call, LPVOID
lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
    }
}

```

```

dblib                dbinit();                // initialize
                    break;
                    case DLL_PROCESS_DETACH:
dblib structures/connections  dbexit();                // close all
                    break;
                    default:
                    /* nothing */;
                    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr, LPCSTR
dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB *pConn;
    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);
    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity, dberr, oserr,
dberrstr, oserrstr );
    }
    return INT_CANCEL;
}

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int severity, char *msgtext)
* PURPOSE: This function handles DB-Library SQL Server error messages
* ARGUMENTS: DBPROCESS *dbproc
*            DBPROCESS id pointer
*            msgno          DBINT
*                       message number
*            msgstate      int
*                       message state
*            severity      int
*                       message severity
*            *msgtext      char
*                       printable message description
* RETURNS: int
*          INT_CONTINUE continue if error is SILENT else INT_CANCEL action
*          INT_CANCEL cancel operation
* COMMENTS: This function also sets the dead lock dbproc variable if necessary.
*/

// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS, DBINT, INT, INT, LPCSTR,
LPCSTR, LPCSTR, DBUSMALLINT);
int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int severity,
LPCSTR srvcname, LPCSTR procname, DBUSMALLINT line)
{
    CTPCC_DBLIB *pConn;
    assert(dbproc != NULL);
    pConn = (CTPCC_DBLIB*)dbgetuserdata(dbproc);
    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno, msgstate, severity,
msgstate );
    }
    return 0;
}

/* FUNCTION: void UtilStrCpy(char * pDest, char * pSrc, int n)
* PURPOSE: This function copies n characters from string pSrc to pDest and
places a null character at the end of the
destination string.
* ARGUMENTS: char *pDest destination
string pointer
*            *pSrc source string pointer
*            n number of characters to
copy
* RETURNS: None
* COMMENTS: Unlike strncpy this function ensures that the result string is
always null terminated.
*/

inline static void UtilStrCpy(char * pDest, const BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*/

```

```

char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;
    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION, "wrong
version of stored procs on
database server" },
        { ERR_INVALID_CUST, "Invalid Customer
id.name." },
        { ERR_NO_SUCH_ORDER, "No orders
found for customer." },
        { ERR_RETRIED_TRANS, "Retries
before transaction succeeded." },
        { 0, "" }
    };
};

static char szNotFound[] = "Unknown error number.";
for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_errno == errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
LPCSTR szServer, // name of SQL server
LPCSTR szUser, // user name
LPCSTR szPassword, // password for login
LPCSTR szHost, // workstation name; shows up in sp_who; max 30 chars, only first 10 kept by SQL
Server
LPCSTR szDatabase ) // name of database to use
{
    return new CTPCC_DBLIB( szServer, szUser, szPassword, szHost,
szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
LPCSTR szServer, // name of SQL server
LPCSTR szUser, // user name
LPCSTR szPassword, // password for login
LPCSTR szHost, // workstation name; shows up in sp_who; max 30 chars, only first 10 kept by SQL
Server
LPCSTR szDatabase ) // name of database to use
{
    LOGINREC *login;
    const BYTE *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

    m_MaxRetries = 10; // how many retries on
deadlock

    // increase max number of connections if getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5) )
    {
        if ( dbsetmaxprocs(iConnectionCount+10) == FAIL )
            ThrowError(CDBLIBERR::eDbSetMaxProcs);
    }

    // allocate a login structure
    login = dblogin();
    if (login == NULL)
        ThrowError(CDBLIBERR::eLogin);
    InterlockedIncrement( &iConnectionCount );

    // register error and message handler functions
    if (dbprocerrhandler(login, err_handler) == NULL)
        ThrowError(CDBLIBERR::eDbProcHandler);

    if (dbprocmsghandle(login, msg_handler) == NULL)
        ThrowError(CDBLIBERR::eDbProcHandler);

    DBSETLUSER(login, szuser);
    DBSETLPWD(login, szPassword);
    DBSETHOST(login, szHost);
    DBSETPACKET(login, (unsigned short)DEFCLPACKSIZE);
    DBSETLVERSION(login, DBVER60); // use dblib
ver 6.0 client behavior

    // set time to wait for login
    if (dbsetlogintime(60) == FAIL)
        ThrowError(CDBLIBERR::eDbSet);

    // set time to wait for statement execution
    if (dbsettime(180) == FAIL)
        ThrowError(CDBLIBERR::eDbSet);

    m_dbproc = dbopen(login, szServer);
}

```

```

// deallocate login structure before checking for success
dbfreelogin( login );
if (m_dbproc == NULL)
    ThrowError(CDBLIBERR::eDbOpen);

// save address of class instance so that the message and error
handler // can get to data.
dbsetuserdata(m_dbproc, (LPVOID)this);

// Use the the right database
if (dbuse(m_dbproc, szDatabase) == FAIL)
    ThrowError(CDBLIBERR::eDbUse);

dbcmd(m_dbproc, "set nocount on ");
// do not return row counts
dbcmd(m_dbproc, "set XACT_ABORT ON"); // rollback
transaction on abort

if (dbsqlexec(m_dbproc) == FAIL)
    ThrowError(CDBLIBERR::eDbSqlExec);

DiscardNextResults(2);

// verify that version of stored procs on server is correct
dbrcinit(m_dbproc, "tpcc_version", 0);

if (dbrcexec(m_dbproc) == FAIL)
    ThrowError(CDBLIBERR::eDbRcExec);

if (dbresults(m_dbproc) != SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);

if (dbnextrow(m_dbproc) != REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

char szSrvVersion[16];
pData=dbdata(m_dbproc, 1);
if (pData)
    UtilStrCpy(szSrvVersion, pData, dbdatlen(m_dbproc,
1));
else
    szSrvVersion[0]=0;
if (strcmp(szSrvVersion, sVersion)
throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

DiscardNextRows(0);
DiscardNextResults(0);

CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int dberr, int oserr, LPCSTR
dberrstr, LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

    if (dberrstr != NULL)
    {
        m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
        strcpy( m_DbLibErr->m_dberrstr, dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
        strcpy( m_DbLibErr->m_oserrstr, oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno, int msgstate, int severity,
LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[ strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext, msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);
}

```

```

// check for SQL Server error first; if yes, throw it and ignore
any Dblib error
if (m_SqlErr != NULL)
{
    CSQLErr *pSqlErr;
    m_SqlErr = m_SqlErr;
    m_SqlErr = NULL;
    // clear our pointer to
instance; catch handler will delete
throw pSqlErr;
}
CDBLIBERR *pDblibErr;
if (m_DblibErr == NULL)
// this case isn't expected to happen, since it means
that an error was returned
// but the error handlers were not called.
pDblibErr = new CDLIBERR(eAction);
else
{
    pDblibErr = m_DblibErr;
    pDblibErr->m_eAction = eAction;
    m_DblibErr = NULL;
    // clear our
pointer to instance; catch handler will delete
}
throw pDblibErr;
}

// Read and discard rows until no more. Throw an exception if number of rows
read doesn't
// match number of rows expected. The row count will be ignored if the expected
count value
// passed in is negative. A typical use of this routine is to verify that there
are no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int RETCODE rc;
    iRowsRead = 0;
    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >= 0)
                ThrowError(CDLibErr::eDblibNextRow);
            else
                break;
        }
        iRowsRead++;
    }
    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iRowsRead))
        ThrowError(CDLibErr::eWrongRowCount);
}

// Read and discard results until no more. Throw an exception if number of
result sets read doesn't
// match number expected. The result set count will be ignored if the expected
count value
// passed in is negative. A typical use of this routine is to verify that there
are no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int iExpectedCount)
{
    int RETCODE rc;
    iResultsRead = 0;
    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >= 0)
                ThrowError(CDLibErr::eDblibResults);
            else
                break;
        }
        DiscardNextRows(-1);
        iResultsRead++;
    }
    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iResultsRead))
        ThrowError(CDLibErr::eWrongRowCount);
}

void CTPCC_DBLIB::StockLevel()
{
    int const BYTE *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_stocklevel",
1, -1, (BYTE *) &m_txn.StockLevel.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -
// @w_id

```

```

smallint dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -
tinyint // @d_id
1, -1, (BYTE *) &m_txn.StockLevel.d_id);
1, -1, (BYTE *) &m_txn.StockLevel.threshold); // @threshold
smallint
if (dbrpcexec(m_dbproc) == FAIL)
    ThrowError(CDLibErr::eDbrpcExec);
if (dbresults(m_dbproc) != SUCCEEDED)
    ThrowError(CDLibErr::eDbResults);
if (dbnextrow(m_dbproc) != REG_ROW)
    ThrowError(CDLibErr::eDblibNextRow);
if (pData=dbdata(m_dbproc, 1))
    m_txn.StockLevel.low_stock
= *(long *) pData);
DiscardNextRows(0);
DiscardNextResults(0);
m_txn.StockLevel.exec_status_code = eOK;
return;
} catch (CSQLErr *e)
{
    if ((e->m_msgno == 1205 ||
        (e->m_msgno ==
            strstr(e->m_msgtext,
                (++iTryCount <=
                    // hit deadlock; backoff
                    delete e;
                    sleep(10 * iTryCount);
                    } else
                    throw;
                } // while (TRUE)
                //if (iTryCount)
                throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS, iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int DBINT commit_flag;
    DBDATETIME datetime;
    DBDATEREQ datereq;
    int iTryCount = 0;
    const BYTE *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_neworder", 0);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -
1, -1, (BYTE *) &m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -
1, -1, (BYTE *) &m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -
1, -1, (BYTE *) &m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -
1, -1, (BYTE *) &m_txn.NewOrder.o_o1_cnt);
            // check whether any order lines are for
            m_txn.NewOrder.o_all_local = 1;
            for (i = 0; i < m_txn.NewOrder.o_o1_cnt;
                i++)
            {
                if
                (m_txn.NewOrder.OL[i].o1_supply_w_id != m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o_all_local = 0; // at least one remote warehouse
                    break;
                }
            }
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -
1, -1, (BYTE *) &m_txn.NewOrder.o_all_local);
            for (i = 0; i < m_txn.NewOrder.o_o1_cnt;
                i++)
            {
                dbrpcparam(m_dbproc, NULL,
0, SQLINT4, -1, -1, (BYTE *) &m_txn.NewOrder.OL[i].o1_i_id);
                dbrpcparam(m_dbproc, NULL,
0, SQLINT2, -1, -1, (BYTE *) &m_txn.NewOrder.OL[i].o1_supply_w_id);
                dbrpcparam(m_dbproc, NULL,
0, SQLINT2, -1, -1, (BYTE *) &m_txn.NewOrder.OL[i].o1_quantity);
            }
            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDLibErr::eDbrpcExec);

```

```

ThrowError(CDLibErr::eDbrpcExec);
// Get order line results
m_txn.NewOrder.total_amount = 0;
for (i = 0; i < m_txn.NewOrder.o_o1_cnt;
    i++)
    {
        if (dbresults(m_dbproc) !=
            SUCCEEDED)
            ThrowError(CDLibErr::eDbResults);
        if (dbnumcols(m_dbproc) !=
            5)
            ThrowError(CDLibErr::eWrongNumCols);
        if (dbnextrow(m_dbproc) !=
            REG_ROW)
            ThrowError(CDLibErr::eDblibNextRow);
        if (pData=dbdata(m_dbproc,
            1))
            utilStrCpy(m_txn.NewOrder.OL[i].o1_i_name, pData,
            dbdatlen(m_dbproc, 1));
        if (pData=dbdata(m_dbproc,
            2))
            m_txn.NewOrder.OL[i].o1_stock = (*(DBSMALLINT *) pData);
        if (pData=dbdata(m_dbproc,
            3))
            utilStrCpy(m_txn.NewOrder.OL[i].o1_brand_generic, pData,
            dbdatlen(m_dbproc, 3));
        if (pData=dbdata(m_dbproc,
            4))
            dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
            dbdatlen(m_dbproc, 4),
            (BYTE *) &m_txn.NewOrder.OL[i].o1_i_price, 8);
            SQLFLT8,
            if (pData=dbdata(m_dbproc,
            5))
            dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
            dbdatlen(m_dbproc, 5),
            (BYTE *) &m_txn.NewOrder.OL[i].o1_amount, 8);
            SQLFLT8,
            m_txn.NewOrder.total_amount = m_txn.NewOrder.total_amount +
            m_txn.NewOrder.OL[i].o1_amount;
            DiscardNextRows(0);
        }
    }
    // get remaining values for w_tax, d_tax,
    o_id, c_last, c_discount, c_credit, o_entry_d, commit_flag
    if (dbresults(m_dbproc) != SUCCEEDED)
        ThrowError(CDLibErr::eDbResults);
    if (dbnextrow(m_dbproc) != REG_ROW)
        ThrowError(CDLibErr::eDblibNextRow);
    if (dbnumcols(m_dbproc) != 8)
        ThrowError(CDLibErr::eWrongNumCols);
    if (pData=dbdata(m_dbproc, 1))
        dbconvert(m_dbproc,
        SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc, 1), SQLFLT8, (BYTE
        *) &m_txn.NewOrder.w_tax,
        8);
        if (pData=dbdata(m_dbproc, 2))
            dbconvert(m_dbproc,
        SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc, 2), SQLFLT8, (BYTE
        *) &m_txn.NewOrder.d_tax,
        8);
        if (pData=dbdata(m_dbproc, 3))
            m_txn.NewOrder.o_id =
        (*(DBINT *) pData);
        if (pData=dbdata(m_dbproc, 4))
            utilStrCpy(m_txn.NewOrder.c_last, pData, dbdatlen(m_dbproc, 4));
        if (pData=dbdata(m_dbproc, 5))
            dbconvert(m_dbproc,
        SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc, 5), SQLFLT8, (BYTE
        *) &m_txn.NewOrder.c_discount, 8);
        if (pData=dbdata(m_dbproc, 6))
            utilStrCpy(m_txn.NewOrder.c_credit, pData, dbdatlen(m_dbproc, 6));
        if (pData=dbdata(m_dbproc, 7))
            {
                datetime = *(DBDATETIME
        *) pData);
                dbdatecrack(m_dbproc,

```

```

&daterec, &datetime);
    m_txn.NewOrder.o_entry_d.year = daterec.year;
    m_txn.NewOrder.o_entry_d.month = daterec.month;
    m_txn.NewOrder.o_entry_d.day = daterec.day;
    m_txn.NewOrder.o_entry_d.hour = daterec.hour;
    m_txn.NewOrder.o_entry_d.minute = daterec.minute;
    m_txn.NewOrder.o_entry_d.second = daterec.second;
    if (pData=dbdata(m_dbproc, 8))
        commit_flag = (*(DBTINYINT
*) pData);
    DiscardNextRows(0);
    DiscardNextResults(0);
    if (commit_flag == 1)
    {
        m_txn.NewOrder.total_amount *= ((1 + m_txn.NewOrder.w_tax +
m_txn.NewOrder.d_tax) ^ (1 -
m_txn.NewOrder.c_discount));
        m_txn.NewOrder.exec_status_code = eOK;
        else
        m_txn.NewOrder.exec_status_code = eInvalidItem;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205 ||
e->m_msgno ==
1205) &&
        strstr(e->m_msgtext,
        (++iTryCount <=
iMaxRetries))
        {
            // hit deadlock; backoff
            delete e;
            Sleep(10 * iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)
    if (iTryCount)
        throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS, iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME datetime;
    DBDATEREK daterec;
    int const BYTE *pData;
    iTryCount = 0;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_payment", 0);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -
1, -1, (BYTE *) &m_txn.Payment.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -
1, -1, (BYTE *) &m_txn.Payment.c_w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLFLT8, -
1, -1, (BYTE *) &m_txn.Payment.h_amount);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -
1, -1, (BYTE *) &m_txn.Payment.d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -
1, -1, (BYTE *) &m_txn.Payment.c_d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -
1, -1, (BYTE *) &m_txn.Payment.c_id);
            // if customer id is zero, then payment
            is by name
            if (m_txn.Payment.c_id == 0)
                dbrpcparam(m_dbproc, NULL,
0, SQLCHAR, -1, strlen(m_txn.Payment.c_last), (unsigned char
*)m_txn.Payment.c_last);
            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDblLibErr::edbRpxExec);
            if (dbresults(m_dbproc) != SUCCEEDED)
                ThrowError(CDblLibErr::edbResults);
            if (dbnextrow(m_dbproc) != REG_ROW)
                ThrowError(CDblLibErr::edbnxtRow);
        }
    }
}

```

```

    if (dbnumcols(m_dbproc) != 27)
        ThrowError(CDblLibErr::ewrongNumCols);
    if (pData=dbdata(m_dbproc, 1))
        m_txn.Payment.c_id =
*((DBINT *) pData);
    if (pData=dbdata(m_dbproc, 2))
        UtilStrCpy(m_txn.Payment.c_last, pData, dbdatlen(m_dbproc, 2));
    if (pData=dbdata(m_dbproc, 3))
    {
        datetime = *(DBDATETIME
dbdatecrack(m_dbproc,
m_txn.Payment.h_date.year
m_txn.Payment.h_date.month
m_txn.Payment.h_date.day
m_txn.Payment.h_date.hour
));
        m_txn.Payment.h_date.minute = daterec.minute;
        m_txn.Payment.h_date.second = daterec.second;
    }
    if (pData=dbdata(m_dbproc, 4))
        UtilStrCpy(m_txn.Payment.w_street_1, pData, dbdatlen(m_dbproc,
4));
    if (pData=dbdata(m_dbproc, 5))
        UtilStrCpy(m_txn.Payment.w_street_2, pData, dbdatlen(m_dbproc,
5));
    if (pData=dbdata(m_dbproc, 6))
        UtilStrCpy(m_txn.Payment.w_city, pData, dbdatlen(m_dbproc, 6));
    if (pData=dbdata(m_dbproc, 7))
        UtilStrCpy(m_txn.Payment.w_state, pData, dbdatlen(m_dbproc, 7));
    if (pData=dbdata(m_dbproc, 8))
        UtilStrCpy(m_txn.Payment.w_zip, pData, dbdatlen(m_dbproc, 8));
    if (pData=dbdata(m_dbproc, 9))
        UtilStrCpy(m_txn.Payment.d_street_1, pData, dbdatlen(m_dbproc,
9));
    if (pData=dbdata(m_dbproc, 10))
        UtilStrCpy(m_txn.Payment.d_street_2, pData, dbdatlen(m_dbproc,
10));
    if (pData=dbdata(m_dbproc, 11))
        UtilStrCpy(m_txn.Payment.d_city, pData, dbdatlen(m_dbproc, 11));
    if (pData=dbdata(m_dbproc, 12))
        UtilStrCpy(m_txn.Payment.d_state, pData, dbdatlen(m_dbproc, 12));
    if (pData=dbdata(m_dbproc, 13))
        UtilStrCpy(m_txn.Payment.d_zip, pData, dbdatlen(m_dbproc, 13));
    if (pData=dbdata(m_dbproc, 14))
        UtilStrCpy(m_txn.Payment.c_first, pData, dbdatlen(m_dbproc, 14));
    if (pData=dbdata(m_dbproc, 15))
        UtilStrCpy(m_txn.Payment.c_middle, pData, dbdatlen(m_dbproc, 15));
    if (pData=dbdata(m_dbproc, 16))
        UtilStrCpy(m_txn.Payment.c_street_1, pData, dbdatlen(m_dbproc,
16));
    if (pData=dbdata(m_dbproc, 17))
        UtilStrCpy(m_txn.Payment.c_street_2, pData, dbdatlen(m_dbproc,
17));
    if (pData=dbdata(m_dbproc, 18))
        UtilStrCpy(m_txn.Payment.c_city, pData, dbdatlen(m_dbproc, 18));
    if (pData=dbdata(m_dbproc, 19))
        UtilStrCpy(m_txn.Payment.c_state, pData, dbdatlen(m_dbproc, 19));
    if (pData=dbdata(m_dbproc, 20))
        UtilStrCpy(m_txn.Payment.c_zip, pData, dbdatlen(m_dbproc, 20));
    if (pData=dbdata(m_dbproc, 21))
        UtilStrCpy(m_txn.Payment.c_phone, pData, dbdatlen(m_dbproc, 21));
    if (pData=dbdata(m_dbproc, 22))
    {
        datetime = *(DBDATETIME
dbdatecrack(m_dbproc,
m_txn.Payment.c_since.year
m_txn.Payment.c_since.month
m_txn.Payment.c_since.day
m_txn.Payment.c_since.hour
));
        m_txn.Payment.c_since.minute = daterec.minute;
        m_txn.Payment.c_since.second = daterec.second;
    }
    if (pData=dbdata(m_dbproc, 23))
        UtilStrCpy(m_txn.Payment.c_credit, pData, dbdatlen(m_dbproc, 23));
}

```

```

    if (pData=dbdata(m_dbproc, 24))
        dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc, 24), SQLFLT8, (BYTE
*)&m_txn.Payment.c_credit_lim, 8);
    if (pData=dbdata(m_dbproc, 25))
        dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc, 25), SQLFLT8, (BYTE
*)&m_txn.Payment.c_discount, 8);
    if (pData=dbdata(m_dbproc, 26))
        dbconvert(m_dbproc,
SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc, 26), SQLFLT8, (BYTE
*)&m_txn.Payment.c_balance, 8);
    if (pData=dbdata(m_dbproc, 27))
        UtilStrCpy(m_txn.Payment.c_data, pData, dbdatlen(m_dbproc, 27));
    DiscardNextRows(0);
    DiscardNextResults(0);
    if (m_txn.Payment.c_id == 0)
        throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_INVALID_CUST);
    else
        m_txn.Payment.exec_status_code = eOK;
    return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205 ||
e->m_msgno ==
1205) &&
    strstr(e->m_msgtext,
    (++iTryCount <=
iMaxRetries))
    {
        // hit deadlock; backoff
        delete e;
        Sleep(10 * iTryCount);
    }
    else
        throw;
}
// while (TRUE)
if (iTryCount)
    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS, iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int DBDATETIME datetime;
    DBDATEREK daterec;
    int RETCODE rc;
    const BYTE *pData;
    iTryCount = 0;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc, "tpcc_orderstatus",
0);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -
1, -1, (BYTE *) &m_txn.OrderStatus.w_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -
1, -1, (BYTE *) &m_txn.OrderStatus.d_id);
            dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -
1, -1, (BYTE *) &m_txn.OrderStatus.c_id);
            // if customer id is zero, then order
            status is by name
            if (m_txn.OrderStatus.c_id == 0)
                dbrpcparam(m_dbproc, NULL,
0, SQLCHAR, -1, strlen(m_txn.OrderStatus.c_last), (unsigned char
*)&m_txn.OrderStatus.c_last);
            if (dbrpcexec(m_dbproc) == FAIL)
                ThrowError(CDblLibErr::edbRpxExec);
            // Get order lines
            if (dbresults(m_dbproc) != SUCCEEDED)
                if ((m_DblLibErr == NULL)
                throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER);
            else
                ThrowError(CDblLibErr::edbResults);
        }
    }
    if (dbnumcols(m_dbproc) != 5)
}

```

```

ThrowError(CDBLIBERR::ewrongNumCols);
        i = 0;
        while (TRUE)
        {
            rc = dbnextrow(m_dbproc);
            if (rc == NO_MORE_ROWS)
                break;
            if (rc != REG_ROW)
                ThrowError(CDBLIBERR::eDBNextRow);

            if(pData=dbdata(m_dbproc,
1))
                m_txn.OrderStatus.oL[i].oL_supply_w_id = (*DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc,
2))
                m_txn.OrderStatus.oL[i].oL_i_id = (*DBINT *) pData);
            if(pData=dbdata(m_dbproc,
3))
                m_txn.OrderStatus.oL[i].oL_quantity = (*DBSMALLINT *) pData);
            if(pData=dbdata(m_dbproc,
4))
                dbconvert(m_dbproc, SQLNUMERIC, (LPCBYTE)pData,
                    dbdatlen(m_dbproc,4),
                    SQLFLT8, (BYTE *)&m_txn.OrderStatus.oL[i].oL_amount, 8);
            if(pData=dbdata(m_dbproc,
5))
                {
                    datetime =
                    *((DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.OrderStatus.oL[i].oL_delivery_d.year = daterec.year;
                    m_txn.OrderStatus.oL[i].oL_delivery_d.month = daterec.month;
                    m_txn.OrderStatus.oL[i].oL_delivery_d.day = daterec.day;
                    m_txn.OrderStatus.oL[i].oL_delivery_d.hour = daterec.hour;
                    m_txn.OrderStatus.oL[i].oL_delivery_d.minute = daterec.minute;
                    m_txn.OrderStatus.oL[i].oL_delivery_d.second = daterec.second;
                    i++;
                    m_txn.OrderStatus.o_oL_cnt = i;

                    if (dbresults(m_dbproc) != SUCCEEDED)
                        ThrowError(CDBLIBERR::eDBResults);
                    if (dbnextrow(m_dbproc) != REG_ROW)
                        ThrowError(CDBLIBERR::eDBNextRow);
                    if (dbnumcols(m_dbproc) != 8)
                        ThrowError(CDBLIBERR::ewrongNumCols);
                    if(pData=dbdata(m_dbproc, 1))
                        m_txn.OrderStatus.c_id =
                        if(pData=dbdata(m_dbproc, 2))
                            UtilStrCpy(m_txn.OrderStatus.c_last, pData, dbdatlen(m_dbproc,2));
                            if(pData=dbdata(m_dbproc, 3))
                                dbdatlen(m_dbproc,3));
                                UtilStrCpy(m_txn.OrderStatus.c_first, pData,
                                dbdatlen(m_dbproc,3));
                                if(pData=dbdata(m_dbproc, 4))
                                    UtilStrCpy(m_txn.OrderStatus.c_middle, pData, dbdatlen(m_dbproc,
                                4));
                                if(pData=dbdata(m_dbproc, 5))
                                    {
                                        datetime = *((DBDATETIME
                                        &daterec, &datetime);
                                        dbdatecrack(m_dbproc,
                                        m_txn.OrderStatus.o_entry_d.year = daterec.year;
                                        m_txn.OrderStatus.o_entry_d.month = daterec.month;
                                        m_txn.OrderStatus.o_entry_d.day = daterec.day;
                                        m_txn.OrderStatus.o_entry_d.hour = daterec.hour;
                                        m_txn.OrderStatus.o_entry_d.minute = daterec.minute;
                                        m_txn.OrderStatus.o_entry_d.second = daterec.second;
                                        if(pData=dbdata(m_dbproc, 6))
                                            m_txn.OrderStatus.o_carrier_id = (*DBSMALLINT *) pData);
                                            if(pData=dbdata(m_dbproc, 7))
                                                dbconvert(m_dbproc,
                                                SQLNUMERIC, (LPCBYTE)pData, dbdatlen(m_dbproc,7),
                                                SQLFLT8, (BYTE *)&m_txn.OrderStatus.c_balance, 8);
                                                if(pData=dbdata(m_dbproc, 8))
                                                    m_txn.OrderStatus.o_oL_id =
                                                    *((DBINT *) pData);

```

```

                DiscardNextRows(0);
                DiscardNextResults(0);

                if (m_txn.OrderStatus.o_oL_cnt == 0)
                    throw new
                    CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
                    else if (m_txn.OrderStatus.c_id == 0 &&
                    m_txn.OrderStatus.c_last[0] == 0)
                        throw new
                        CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
                        else
                            m_txn.OrderStatus.exec_status_code = eOK;
                            return;
                            catch (CSQLERR *e)
                                {
                                    if ((e->m_msgno == 1205 ||
                                    (e->m_msgno ==
                                    iErrorDbProvider &&
                                    sErrTimeoutExpired) != NULL)) &&
                                    (iMaxRetries))
                                        {
                                            // hit deadlock; backoff
                                            delete e;
                                            Sleep(10 * iTryCount);
                                        }
                                        else
                                            throw;
                                }
                                } // while (TRUE)
                                if (iTryCount)
                                    throw new
                                    CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS, iTryCount);
                                }
                                void CTPCC_DBLIB::Delivery()
                                {
                                    int
                                    int
                                    const BYTE *pData;
                                    iTryCount = 0;
                                    ResetError();
                                    while (TRUE)
                                    {
                                        try
                                        {
                                            dbrpcinit(m_dbproc, "tpcc_delivery", 0);
                                            dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -
                                            1, -1, (BYTE *) &m_txn.Delivery.w_id);
                                            dbrpcparam(m_dbproc, NULL, 0, SQLINT1, -
                                            1, -1, (BYTE *) &m_txn.Delivery.o_carrier_id);
                                            if (dbrpcexec(m_dbproc) == FAIL)
                                                ThrowError(CDBLIBERR::eDBRpcExec);
                                            if (dbresults(m_dbproc) != SUCCEEDED)
                                                ThrowError(CDBLIBERR::eDBResults);
                                            if (dbnextrow(m_dbproc) != REG_ROW)
                                                ThrowError(CDBLIBERR::eDBNextRow);
                                            if (dbnumcols(m_dbproc) != 10)
                                                ThrowError(CDBLIBERR::ewrongNumCols);
                                            for (i=0; i<10; i++)
                                                {
                                                    if (pData =
                                                    dbdata(m_dbproc, i+1))
                                                        m_txn.Delivery.o_oL_id[i] = (*DBINT *)pData);
                                                        DiscardNextRows(0);
                                                        DiscardNextResults(0);
                                                        m_txn.Delivery.exec_status_code = eOK;
                                                        return;
                                                        catch (CSQLERR *e)
                                                            {
                                                                if ((e->m_msgno == 1205 ||
                                                                (e->m_msgno ==
                                                                iErrorDbProvider &&
                                                                sErrTimeoutExpired) != NULL)) &&
                                                                (iMaxRetries))
                                                                    {
                                                                        // hit deadlock; backoff
                                                                        delete e;
                                                                        Sleep(10 * iTryCount);
                                                                    }
                                                                    else
                                                                        throw;
                                                                }
                                                                } // while (TRUE)

```

```

// if (iTryCount)
// throw new
// CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS, iTryCount);
// }
void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }
    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }
    return;
}



db_dblib_dll/src/tpcc_dblib.h



```

/* FILE: TPCC_DBLIB.H Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
All Rights Reserved Version 4.10.000 audited
by Richard Gimarc, Performance Metrics, 3/17/99
PURPOSE: Header file for TPC-C txn class implementation.
Change history: 4.20.000 - updated rev number to match kit
#pragma once
#ifndef PDBPROCESS
#define DBPROCESS void // dbprocess structure type
typedef DBPROCESS * PDBPROCESS;
#endif
// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec(dllimport)
#endif
class CSQLERR : public CBaseErr
{
public:
 CSQLERR(void)
 {
 m_msgno = 0;
 m_msgstate = 0;
 m_severity = 0;
 m_msgtext = NULL;
 };
 ~CSQLERR()
 {
 delete [] m_msgtext;
 };
 int m_msgno;
 int m_msgstate;
 int m_severity;
 char *m_msgtext;
 int ErrorType() {return ERR_TYPE_SQL;};
 int ErrorNum() {return m_msgno;};
 char *ErrorText() {return m_msgtext;};
};
class CDBLIBERR : public CBaseErr
{
public:
 enum ACTION
 {
 eNone,
 eUnknown,
 eLogin,
 // error from dblogin
 eDbOpen,
 // error from dbopen
 eDbUse,
 // error from dbuse
 eDbSqlExec,
 // error from dbsqlexec
 eDbSet,
 // error from one of the dbset* routines
 eDbNextRow,
 // error from dbnextrow
 eWrongRowCount,
 // more or less rows returned than expected
 eWrongNumCols,
 // more or less columns returned than expected
 eDBResults,
 // error from dbresults
 eDBRpcExec,
 // error from dbrpcexec
 eDbSetMaxProcs,

```


```

```

// error from dbsetmaxprocs
edbProcHandler
// error from either dbprocerrhandle or dbprocmsgandle
};

dberror = 0, int oserr = 0)
{
    m_eAction = eAction;
    m_severity = severity;
    m_dberror = dberror;
    m_oserr = oserr;

    m_dberrstr = NULL;
    m_oserrstr = NULL;
};

~CDBLIBERR()
{
    delete [] m_dberrstr;
    delete [] m_oserrstr;
};

ACTION m_eAction;
int m_severity;
int m_dberror;
int m_oserr;
char *m_dberrstr;
char *m_oserrstr;

int ErrorType() {return ERR_TYPE_DBLIB;};
int ErrorNum() {return m_dberror;};
char *ErrorText() {return m_dberrstr;};
};

class CTPCC_DBLIB_ERR : public CBaseErr
{
public:
    enum CTPCC_DBLIB_ERRS
    {
        ERR_WRONG_SP_VERSION = 1, // "wrong
        version of stored procs on database server"
        ERR_INVALID_CUST,
        // "Invalid Customer id,name"
        ERR_NO_SUCH_ORDER,
        // "No orders found for customer"
        ERR_RETRIED_TRANS,
        // "Retries before transaction succeeded."
    };

    CTPCC_DBLIB_ERR( int iErr ) { m_errno = iErr;

m_iTryCount = 0; };

    CTPCC_DBLIB_ERR( int iErr, int iTryCount ) { m_errno
= iErr; m_iTryCount = iTryCount; };

    int m_errno;
    int m_iTryCount;

    int ErrorType() {return ERR_TYPE_TPCC_DBLIB;};
    int ErrorNum() {return m_errno;};

    char *ErrorText();
};

class DllDecl1 CTPCC_DBLIB : public CTPCC_BASE
{
private:
    // declare variables and private functions here...
    PDBPROCESS m_dbproc;
    CDBLIBERR m_DBLIBerr; // not
    allocated until needed (maybe never)
    CSQLErr m_SqlErr;
    // not allocated until needed (maybe never)
    int m_MaxRetries;
    // retry count on deadlock

    void DiscardNextRows(int iExpectedCount);
    void DiscardNextResults(int iExpectedCount);
    void ThrowError(CDBLIBERR::ACTION eAction);
    void ResetError();

    union
    {
        NewOrder; NEW_ORDER_DATA
        Payment; PAYMENT_DATA
        Delivery; DELIVERY_DATA
        StockLevel; STOCK_LEVEL_DATA
        OrderStatus; ORDER_STATUS_DATA
        m_txn;
    };

public:
    CTPCC_DBLIB(LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost,
LPCSTR szDatabase);
~CTPCC_DBLIB(void);

    inline PNEW_ORDER_DATA { return
&m_txn.NewOrder; };
    inline PPAYMENT_DATA { return
BuffAddr_Payment(); }
    inline PDELIVERY_DATA { return
&m_txn.Delivery; };
    inline PSTOCK_LEVEL_DATA { return
&m_txn.StockLevel; };
    inline PORDER_STATUS_DATA { return
BuffAddr_OrderStatus(); };
};

```

```

void NewOrder ();
void Payment ();
void Delivery ();
void StockLevel ();
void OrderStatus ();

// these are public because they must be called from
the dblib err_handler and msg_handler
// outside of the class
void SetDbLibError(int severity, int dberr, int oserr,
LPCSTR dberrstr, LPCSTR oserrstr);
void SetSqlError( int msgno, int msgstate, int
severity, LPCSTR msgtext );
};

extern "C" dllDecl1 CTPCC_DBLIB* CTPCC_DBLIB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase );

typedef CTPCC_DBLIB* (TYPE_CTPCC_DBLIB)(LPCSTR, LPCSTR, LPCSTR, LPCSTR, LPCSTR);

```

db_odbc_dll/db_odbc_dll.dsp

```

# Microsoft Developer Studio Project File - Name="db_odbc_dll" - Package
Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "win32 (x86) Dynamic-Link Library" 0x0102

CFG=db_odbc_dll - win32 IceCAP
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "db_odbc_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE NMAKE /f "db_odbc_dll.mak" CFG="db_odbc_dll - win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE "db_odbc_dll - win32 Release" (based on "win32 (x86) Dynamic-Link
Library")
!MESSAGE "db_odbc_dll - win32 Debug" (based on "win32 (x86) Dynamic-Link
Library")
!MESSAGE "db_odbc_dll - win32 IceCAP" (based on "win32 (x86) Dynamic-Link
Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CP=c1.exe
MTL=mid1.exe
RSC=rc.exe

!IF "$(CFG)" == "db_odbc_dll - win32 Release"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX
/FD /C
# ADD CPP /nologo /MD /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD
/C
# ADD BASE MTL /nologo /D "NDEBUG" /mktyp1ib203 /o /win32 "NUL"
# ADD MTL /nologo /D "NDEBUG" /mktyp1ib203 /o /win32 "NUL"
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kerne132.lib user32.lib gdi32.lib winspool.lib cmd1g32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbc32.lib odbccp32.lib /nologo /subsystem:windows /d11 /machine:I386
# ADD LINK32 kerne132.lib user32.lib gdi32.lib winspool.lib cmd1g32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib

odbccp32.lib /nologo /subsystem:windows /d11 /machine:I386
/out:".bin\tpcc_odbc_dll"

!ELSEIF "$(CFG)" == "db_odbc_dll - win32 Debug"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"

```

```

# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTD /w3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D
"_WINDOWS" /YX /FD /C
# ADD CPP /nologo /MDD /w3 /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX
/FD /C
# ADD BASE MTL /nologo /D "_DEBUG" /mktyp1ib203 /o /win32 "NUL"
# ADD MTL /nologo /D "_DEBUG" /mktyp1ib203 /o /win32 "NUL"
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kerne132.lib user32.lib gdi32.lib winspool.lib cmd1g32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbc32.lib odbccp32.lib /nologo /subsystem:windows /d11 /debug /machine:I386
/pdbtype:sept
# ADD LINK32 kerne132.lib user32.lib gdi32.lib winspool.lib cmd1g32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib

odbccp32.lib /nologo /subsystem:windows /d11 /debug /machine:I386
/out:".bin\tpcc_odbc_dll" /pdbtype:sept

!ELSEIF "$(CFG)" == "db_odbc_dll - win32 IceCAP"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "db_odbc_"
# PROP BASE Intermediate_Dir "db_odbc_"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MDD /w3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D
"_WINDOWS" /YX /FD /Gh /C
# ADD CPP /nologo /MD /w3 /Gm /GX /ZI /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS"
/D "ICECAP" /YX /FD /Gh /C
# ADD BASE MTL /nologo /D "_DEBUG" /mktyp1ib203 /o /win32 "NUL"
# ADD MTL /nologo /D "_DEBUG" /mktyp1ib203 /o /win32 "NUL"
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kerne132.lib user32.lib gdi32.lib winspool.lib cmd1g32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbc32.lib odbccp32.lib /nologo /subsystem:windows /d11 /debug /machine:I386
/out:".bin\tpcc_odbc_dll" /pdbtype:sept
# ADD LINK32 icap.lib kerne132.lib user32.lib gdi32.lib winspool.lib
cmd1g32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbc32.lib odbccp32.lib /nologo /subsystem:windows /d11 /debug /machine:I386
/out:".bin\tpcc_odbc_dll" /pdbtype:sept

!ENDIF

# Begin Target

# Name "db_odbc_dll - win32 Release"
# Name "db_odbc_dll - win32 Debug"
# Name "db_odbc_dll - win32 IceCAP"
# Begin Group "Source"
# PROP Default_Filter "*.cpp"
# Begin Source File
SOURCE=.\src\tpcc_odbc.cpp
# End Source File
# End Group
# Begin Group "Header"
# PROP Default_Filter "*.h"
# Begin Source File
SOURCE=.\common\src\error.h
# End Source File
# Begin Source File
SOURCE=.\src\tpcc_odbc.h
# End Source File
# Begin Source File
SOURCE=.\src\tpcc_odbc.c
# End Source File
SOURCE=.\common\src\trans.h
# End Source File
# Begin Source File
SOURCE=.\common\src\txn_base.h
# End Source File
# End Group
# End Target
# End Project

```

db_odbc_dll/src/tpcc_odbc.cpp

```

/* FILE: TPCC_ODBC.CPP Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
*
* All Rights Reserved

```

```

*
* by Richard Gimarc, Performance Metrics, 3/17/99      Version 4.10.000 audited
*
* PURPOSE:      Implements ODBC calls for TPC-C txns.
* Contact:      Charles Levine (clevine@microsoft.com)
*
* Change history:
*               4.20.000 - updated rev number to match kit
*               4.10.001 - not deleting error class in catch handler
*
* on deadlock retry;
*
* but a memory leak
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqltypes.h>
#include <sql.h>
#include <sqltext.h>
#include <odbc.h>
#include <odbcss.h>

#ifdef ICECAP
#include <icexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from tpcc_version stored proc
const char sversion[] = "4.10.000";

const iMaxRetries = 10; // how many retries on deadlock

const int ierrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV;
// ODBC environment handle

BOOL WINAPIENTRY DllMain(HMODULE hModule, DWORD ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if ( SQLAllocHandle(Std(SQL_HANDLE_ENV,
SQL_NULL_HANDLE, &henv) != SQL_SUCCESS )
                break; return FALSE;

            case DLL_PROCESS_DETACH:
                if ( henv != NULL )
                    SQLFreeEnv(henv);
                break;

            default:
                /* nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
*/
char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;
    static SERRMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION, "wrong
version of stored procs on
database server" },
        { ERR_INVALID_CUST, "Invalid customer id,name." },
        { ERR_NO_SUCH_ORDER, "No orders
found for customer." },
        { ERR_RETRIED_TRANS, "Retries
before transaction succeeded." },
        { 0,
    };

    static char szNotFound[] = "Unknown error number.";
    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno == errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

```

```

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer, // name of SQL server
LPCSTR szUser, // user name
for login
LPCSTR szPassword, // password for login
LPCSTR szHost, // not used
LPCSTR szDatabase ) // name of database to use
{
    return new CTPCC_ODBC( szServer, szUser, szPassword, szHost,
szDatabase );
}

CTPCC_ODBC::CTPCC_ODBC (
LPCSTR szServer, // name of SQL server
LPCSTR szUser, // user name for login
LPCSTR szPassword, // password for login
LPCSTR szHost, // not used
LPCSTR szDatabase // name of database to use
)
{
    RETCODE rc;

    // initialization
    m_hdbc = SQL_NULL_HDBC;
    m_hstmt = SQL_NULL_HSTMT;

    m_descNewOrderCol1 = SQL_NULL_HDESC;
    m_descNewOrderCol2 = SQL_NULL_HDESC;
    m_descOrderStatusCol1 = SQL_NULL_HDESC;
    m_descOrderStatusCol2 = SQL_NULL_HDESC;

SQL_SUCCESS ) if ( SQLAllocHandle(SQL_HANDLE_DBC, henv, &m_hdbc) !=
ThrowError(COBCERR::eAllocHandle);

SQL_SUCCESS ) if ( SQLSetConnectOption(m_hdbc, SQL_PACKET_SIZE, 4096) !=
ThrowError(COBCERR::eConnOption);
{
    char
szConnectStr[256];
char
szOutStr[1024];
SQLSMALLINT iOutStrLen;

sprintf( szConnectStr, "DRIVER=SQL
Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser, szPassword,
szDatabase );

rc = SQLDriverConnect(m_hdbc, NULL,
(SQLCHAR*)szConnectStr, sizeof(szConnectStr),
(SQLCHAR*)szOutStr, sizeof(szOutStr),
&iOutStrLen, SQL_DRIVER_NOPROMPT );

if ( rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO )
ThrowError(COBCERR::eConnect);
}

SQL_SUCCESS ) if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmt) !=
ThrowError(COBCERR::eAllocHandle);
{
    char
buffer[128];

// set some options affecting connection behavior
strcpy(buffer, "set nocount on set XACT_ABORT ON");
rc = SQLExecDirect(m_hstmt, (unsigned char *)buffer,
SQL_NTS);

if ( rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO )
ThrowError(COBCERR::eExecDirect);

// verify that version of stored procs on server is
correct
char db_sp_version[10];
strcpy(buffer, "call tpcc_version");
rc = SQLExecDirect(m_hstmt, (unsigned char *)buffer,
SQL_NTS);

if ( rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO )
ThrowError(COBCERR::eExecDirect);

if ( SQLBindCol(m_hstmt, 1, SQL_C_CHAR,
&db_sp_version, sizeof(db_sp_version), NULL) != SQL_SUCCESS )
ThrowError(COBCERR::eBindCol);
if ( SQLFetch(m_hstmt) == SQL_ERROR )
ThrowError(COBCERR::eFetch);
if ( strcmp(db_sp_version, sversion) )
throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION );
}

SQLFreeHandle(SQL_HANDLE_STMT, m_hstmt);

// Bind parameters for each of the transactions
InitNewOrderParams();
InitPaymentParams();
InitOrderStatusParams();

```

```

InitDeliveryParams();
InitStockLevelParams();
}

CTPCC_ODBC::~CTPCC_ODBC( void )
{
    // note: descriptors are automatically released when the
connection is dropped
SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtNewOrder);
SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtPayment);
SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtDelivery);
SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtOrderStatus);
SQLFreeHandle(SQL_HANDLE_STMT, m_hstmtStockLevel);

SQLDisconnect(m_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);
}

void CTPCC_ODBC::ThrowError( COBCERR::ACTION eAction )
{
    RETCODE rc;
    DWORD dwWord;
    char
szState[6];
char
szMsg[SQL_MAX_MESSAGE_LENGTH];
char
szTmp[6*SQL_MAX_MESSAGE_LENGTH]; // not
allocated until needed (maybe never)

COBCERR *pOdbcErr;
pOdbcErr = new COBCERR();
pOdbcErr->m_NativeError = 0;
pOdbcErr->m_eAction = eAction;
pOdbcErr->m_bBeadLock = FALSE;

szTmp[0] = 0;
while (TRUE)
{
    rc = SQLError(henv, m_hdbc, m_hstmt, (BYTE *)&szState,
) &szMsg, sizeof(szMsg), NULL); // (BYTE
if (rc == SQL_NO_DATA)
    break;

// check for deadlock
if (!NativeError == 1205 || (!NativeError ==
iErrOleDbProvider &&
NULL))
    strstr(szMsg, sErrTimeoutExpired) !=
pOdbcErr->m_bBeadLock = TRUE;

0)
    if (pOdbcErr->m_NativeError == 0 && !NativeError !=
pOdbcErr->m_NativeError = !NativeError;

error text
if ( ( strlen(szMsg) + 2 ) > (sizeof(szTmp) -
strlen(szTmp)) )
    break;

// include line break after first error msg
if (szTmp[0] != 0)
    strcat( szTmp, "\n");
}
if (pOdbcErr->m_odbcerrstr != NULL)
{
    delete [] pOdbcErr->m_odbcerrstr;
    pOdbcErr->m_odbcerrstr = NULL;
}
if (strlen(szTmp) > 0)
{
    pOdbcErr->m_odbcerrstr = new char[ strlen(szTmp)+1 ];
    strcpy( pOdbcErr->m_odbcerrstr, szTmp );
}

SQLFreeStmt(m_hstmt, SQL_CLOSE);
throw pOdbcErr;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(COBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.StockLevel.w_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.StockLevel.d_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.StockLevel.threshold, 0, NULL) !=
SQL_SUCCESS
        )
        ThrowError(COBCERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS )
        ThrowError(COBCERR::eBindCol);
}

```

```

void CTPCC_ODBC::StockLevel()
{
    RETCODE          rc;
    int               iTryCount = 0;
    m_hstmt = m_hstmtStockLevel;
    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt,
                (SQLWCHAR*)L"call tpcc_stocklevel(?,?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
                SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);
            if ( SQLFetch(m_hstmt) == SQL_ERROR )
                ThrowError(CODBCERR::eFetch);
            SQLFreeStmt(m_hstmt, SQL_CLOSE);
            m_txn.StockLevel.exec_status_code = eOK;
            break;
        }
        catch (CODBCERR *e)
        {
            if ((!e->m_bDeadLock) || (++iTryCount >
                iMaxRetries))
                throw;
            // hit deadlock; backoff for
            // increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }
    // if (iTryCount
    // CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS, iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
        &m_hstmtNewOrder) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
        &m_descNewOrderCols1) != SQL_SUCCESS
        || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
        &m_descNewOrderCols2) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eAllocHandle);
    m_hstmt = m_hstmtNewOrder;
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
        m_descNewOrderCols1, SQL_IS_POINTER ) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eSetStmtAttr);
    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.NewOrder.d_id, 0, NULL) !=
        SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_SLONG, SQL_INTEGER, 0, 0, &m_txn.NewOrder.c_id, 0, NULL) !=
        SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.NewOrder.o_o1_cnt, 0, NULL) !=
        SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.NewOrder.o_all_local, 0, NULL) !=
        SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindParam);
    for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
    {
        if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
            SQL_C_SLONG, SQL_INTEGER, 0, 0, &m_txn.NewOrder.OL[j].o1_id, 0, NULL)
            != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
            SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
            &m_txn.NewOrder.OL[j].o1_supply_w_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
            SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
            &m_txn.NewOrder.OL[j].o1_quantity,
            0, NULL) != SQL_SUCCESS
            )
            ThrowError(CODBCERR::eBindParam);
    }
    // set the bind offset pointer
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_ROW_BIND_OFFSET_PTR,
        &m_bindOffset, SQL_IS_POINTER ) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eSetStmtAttr);
    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
        &m_txn.NewOrder.OL[0].o1_name, sizeof(m_txn.NewOrder.OL[0].o1_name),

```

```

NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
    &m_txn.NewOrder.OL[0].o1_stock, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
    &m_txn.NewOrder.OL[0].o1_brand_generic,
    sizeof(m_txn.NewOrder.OL[0].o1_brand_generic), NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
    &m_txn.NewOrder.OL[0].o1_i_price, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
    &m_txn.NewOrder.OL[0].o1_amount, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);
    // associate the column bindings for the second result set
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
        m_descNewOrderCols2, SQL_IS_POINTER ) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eSetStmtAttr);
    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
        &m_txn.NewOrder.w_tax, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
        &m_txn.NewOrder.d_tax, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
        &m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
        &m_txn.NewOrder.c_last, sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
        &m_txn.NewOrder.c_discount, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
        &m_txn.NewOrder.c_credit, sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
        &m_txn.NewOrder.o_entry_d, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
        &m_txn.No_commit_flag, 0, NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::NewOrder()
{
    int
    RETCODE          rc;
    int
    iTryCount = 0;
    // 0 1 2
    012345678901234567890123456789
    wchar_t
    szSqlTemplate[] = L"call tpcc_neworder(?,?,?,?,"
        L"?,?,?,?,?,?,?,?,?,?,"
        L"?,?,?,?,?,?,?,?,?,?,?,"
        L"?,?,?,?,?,?,?,?,?,?,?)";
    m_hstmt = m_hstmtNewOrder;
    // associate the parameter and column bindings for this
    transaction
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
        m_descNewOrderCols1, SQL_IS_POINTER ) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eSetStmtAttr);
    // clip statement buffer based on number of parameters
    // fixed part is 29 chars and variable part is 6 chars per line
    item
    i = 29 + m_txn.NewOrder.o_o1_cnt*6;
    wcsncpy( &szSqlTemplate[i], L"*)" );
    // check whether any order lines are for a remote warehouse
    m_txn.NewOrder.o_all_local = 1;
    for ( i = 0; i < m_txn.NewOrder.o_o1_cnt; i++)
    {
        if (m_txn.NewOrder.OL[i].o1_supply_w_id !=
            m_txn.NewOrder.o_all_local) // at
            break;
    }
    least one remote warehouse
    while (TRUE)
    {
        try
        {
            m_bindOffset = 0;
            rc = SQLExecDirectW(m_hstmt,
                (SQLWCHAR*)szSqlTemplate, SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
                SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);
            // Get order line results
            m_txn.NewOrder.total_amount = 0;
            for ( i = 0; i < m_txn.NewOrder.o_o1_cnt;
                i++)
            {
                // set the bind offset
                value...

```

```

        m_bindOffset = i *
        sizeof(m_txn.NewOrder.OL[0]);
        if ( SQLFetch(m_hstmt) ==
            SQL_ERROR
            )
            ThrowError(CODBCERR::eFetch);
        // move to the next
        resultset
        if ( SQLMoreResults(m_hstmt) == SQL_ERROR )
            if
                ThrowError(CODBCERR::eMoreResults);
        m_txn.NewOrder.total_amount += m_txn.NewOrder.OL[i].o1_amount;
    }
    // associate the column bindings for the
    second result set
    if ( SQLSetStmtAttrW( m_hstmt,
        SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2, SQL_IS_POINTER ) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eSetStmtAttr);
    if ( SQLFetch(m_hstmt) == SQL_ERROR
        )
        ThrowError(CODBCERR::eFetch);
    SQLFreeStmt(m_hstmt, SQL_CLOSE);
    if (m_no_commit_flag == 1)
    {
        m_txn.NewOrder.total_amount *= ((1 + m_txn.NewOrder.w_tax +
            m_txn.NewOrder.d_tax) * (1 -
            m_txn.NewOrder.c_discount));
        m_txn.NewOrder.exec_status_code = eOK;
        }
        else
        {
            m_txn.NewOrder.exec_status_code = eInvalidItem;
            break;
        }
        catch (CODBCERR *e)
        {
            if ((!e->m_bDeadLock) || (++iTryCount >
                iMaxRetries))
                throw;
            // hit deadlock; backoff for
            // increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }
    // if (iTryCount
    // CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS, iTryCount);
}

void CTPCC_ODBC::InitPaymentParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hstmtPayment) !=
        SQL_SUCCESS
        )
        ThrowError(CODBCERR::eAllocHandle);
    m_hstmt = m_hstmtPayment;
    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.Payment.c_w_id, 0, NULL) !=
        SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_DOUBLE, SQL_NUMERIC, 6, 2, &m_txn.Payment.h_amount, 0, NULL) !=
        SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.Payment.d_id, 0, NULL) !=
        SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.Payment.c_d_id, 0, NULL) !=
        SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_SLONG, SQL_INTEGER, 0, 0, &m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
        SQL_C_CHAR, SQL_CHAR, sizeof(m_txn.Payment.c_last), 0,
        &m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last), NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindParam);
    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
        &m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
        &m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last), NULL) !=
        SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
        &m_txn.Payment.h_date, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,

```

```

&m_txn.Payment.w_street_1, sizeof(m_txn.Payment.w_street_1), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_street_2, sizeof(m_txn.Payment.w_street_2), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_city, sizeof(m_txn.Payment.w_city), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_state, sizeof(m_txn.Payment.w_state), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.w_zip, sizeof(m_txn.Payment.w_zip), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_street_1, sizeof(m_txn.Payment.d_street_1), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_street_2, sizeof(m_txn.Payment.d_street_2), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_city, sizeof(m_txn.Payment.d_city), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_state, sizeof(m_txn.Payment.d_state), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.d_zip, sizeof(m_txn.Payment.d_zip), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_first, sizeof(m_txn.Payment.c_first), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_middle, sizeof(m_txn.Payment.c_middle), NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_street_1, sizeof(m_txn.Payment.c_street_1), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_street_2, sizeof(m_txn.Payment.c_street_2), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_city, sizeof(m_txn.Payment.c_city), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_state, sizeof(m_txn.Payment.c_state), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_zip, sizeof(m_txn.Payment.c_zip), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_phone, sizeof(m_txn.Payment.c_phone), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
&m_txn.Payment.c_since, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_credit, sizeof(m_txn.Payment.c_credit), NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_credit_lim, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_discount, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.Payment.c_balance, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.Payment.c_data, sizeof(m_txn.Payment.c_data), NULL) !=
SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount = 0;
    m_hstmt = m_hstmtPayment;
    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;
    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)"L'{call tpcc_payment(?,?,?,?)}', SQL_NTS);
            if (rc == SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);
            if ( SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);
            SQLFreeStmt(m_hstmt, SQL_CLOSE);
            if (m_txn.Payment.c_id == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else

```

```

        m_txn.Payment.exec_status_code = eOK;
        break;
    } catch (CODBCERR *e)
    {
        if ((!e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
            throw;
        // hit deadlock; backoff for
        increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

// if (iTryCount)
// throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS, iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtOrderStatus) != SQL_SUCCESS
    || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
    || SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eAllocHandle);
    m_hstmt = m_hstmtOrderStatus;
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);
    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.OrderStatus.w_id, 0, NULL) !=
SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_UTINYINT, SQL_TINYINT, 0, 0, &m_txn.OrderStatus.d_id, 0, NULL) !=
SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0, &m_txn.OrderStatus.c_id, 0, NULL) !=
SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_CHAR, SQL_CHAR, sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last, sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);
    // configure block cursor
    if ( SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.oL[0]), 0) != SQL_SUCCESS
    || SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROWS_FETCHED_PTR,
&m_RowsFetched, 0) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eSetStmtAttr);
    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.OrderStatus.oL[0].oL_supply_w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.OrderStatus.oL[0].oL_i_id, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.OrderStatus.oL[0].oL_quantity, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.OrderStatus.oL[0].oL_amount, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.oL[0].oL_delivery_d, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);
    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.OrderStatus.c_last, sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.OrderStatus.c_first, sizeof(m_txn.OrderStatus.c_first), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.OrderStatus.c_middle, sizeof(m_txn.OrderStatus.c_middle), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.o_entry_d, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_SSHORT,
&m_txn.OrderStatus.o_carrier_id, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.OrderStatus.c_balance, 0, NULL) != SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i, SQL_C_SLONG,
&m_txn.OrderStatus.o_id, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);
}

```

```

void CTPCC_ODBC::OrderStatus()
{
    int
    iTryCount = 0;
    RETCODE
    rc;
    m_hstmt = m_hstmtOrderStatus;
    if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);
    if (m_txn.OrderStatus.c_id == 0)
        m_txn.OrderStatus.c_last[0] = 0;
    while (TRUE)
    {
        try
        {
            // configure block cursor
            if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_ARRAY_SIZE, (SQLPOINTER)1, 0) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);
            rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)"L'{call tpcc_orderstatus(?,?,?)}', SQL_NTS);
            if ( ((rc == SQL_SUCCESS_WITH_INFO) &&
(m_RowsFetched != 0)) || (rc == SQL_ERROR) )
                ThrowError(CODBCERR::eExecDirect);
            // configure block cursor
            if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_ARRAY_SIZE, (SQLPOINTER)MAX_ORDER_STATUS_ITEMS, 0) !=
SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);
            rc = SQLFetchScroll( m_hstmt,
SQL_FETCH_NEXT, 0 );
            if ( ((rc == SQL_SUCCESS_WITH_INFO) &&
(m_RowsFetched != 0)) || (rc == SQL_ERROR) )
                ThrowError(CODBCERR::eFetchScroll);
            m_txn.OrderStatus.o_oL_cnt =
(short)m_RowsFetched;
            if (m_txn.OrderStatus.o_oL_cnt != 0)
                if ( SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);
            if ( SQLMoreResults(m_hstmt) == SQL_ERROR )
                ThrowError(CODBCERR::eMoreResults);
            if ( rc =
SQLFetch(m_hstmt) ) == SQL_ERROR )
                ThrowError(CODBCERR::eFetch);
            SQLFreeStmt(m_hstmt, SQL_CLOSE);
            if (m_txn.OrderStatus.o_oL_cnt == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
            else if (m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.OrderStatus.exec_status_code = eOK;
            break;
        } catch (CODBCERR *e)
        {
            if ((!e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
                throw;
            // hit deadlock; backoff for
            increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }
    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS, iTryCount);
}

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtDelivery) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);
    m_hstmt = m_hstmtDelivery;
    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,

```

```

SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0, &m_txn.Delivery.o_carrier_id, 0, NULL) !=
SQL_SUCCESS
    )
    ThrowError(COdbcCERR::eBindParam);
    for (i=0;i<10;i++)
    {
        if ( SQLBindCol(m_hstmt, (UWORD)(i+1), SQL_C_SLONG,
&m_txn.Delivery.o_id[i], 0, NULL) != SQL_SUCCESS )
            ThrowError(COdbcCERR::eBindCol);
    }
}

void CTPCC_ODBC::Delivery()
{
    RETCODE          rc;
    int               iTryCount = 0;
    m_hstmt = m_hstmtDelivery;
    while (TRUE)
    {
        try
        {
            rc = SQLExecDirectW(m_hstmt,
(SQLWCHAR*)L"{call tpcc_delivery(?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
                ThrowError(COdbcCERR::eExecDirect);

            if ( SQLFetch(m_hstmt) == SQL_ERROR )
                ThrowError(COdbcCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);
            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
        catch (COdbcCERR *e)
        {
            if ((!e->m_bDeadLock) || (++iTryCount >
iMaxRetries))
                throw;

            // hit deadlock; backoff for
            // increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }
    if (iTryCount)
        throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS, iTryCount);
}

```

db_odbc_dll/src/tpcc_odbc.h

```

/* FILE: TPCC_ODBC.H Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* Version 4.10.000 audited
by Richard Gimarc, Performance Metrics, 3/17/99
* PURPOSE: Header file for TPC-C txn class implementation.
* Change history: 4.20.000 - updated rev number to match kit
*/
#pragma once
// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif
class COdbcCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn, // error from SQLAllocConnect
        eAllocHandle, // error from
SQLAllocHandle
        eConnOptn, // error from
SQLSetConnectOption
        eConnect, // error from SQLConnect
        eAllocStmt, // error from SQLAllocStm
        eExecDirect, // error from
SQLExecDirect
        eBindParam, // error from SQLBindParameter
        eBindCol, // error from SQLBindCol
    };
};

```

```

// error from SQLFetch
SQLFetchScroll
SQLMoreResults
// error from SQLPrepare
ePrepare,
// error from SQLExecute
eExecute,
SQLSetEnvAttr
eSetEnvAttr, // error from
SQLSetStmAttr
eSetStmAttr // error from
};
COdbcCERR(void)
{
    m_eAction = eNone;
    m_NativeError = 0;
    m_bDeadLock = FALSE;
    m_odbcerrstr = NULL;
};
~COdbcCERR()
{
    if (m_odbcerrstr != NULL)
        delete [] m_odbcerrstr;
};
ACTION m_eAction;
int m_bDeadLock;
m_NativeError;
char *m_odbcerrstr;
int ErrorType() {return ERR_TYPE_ODBC};
int ErrorNum() {return m_NativeError};
char *ErrorText() {return m_odbcerrstr};
};
};
class CTPCC_ODBC_ERR : public CBaseErr
{
public:
    enum TPCC_ODBC_ERRS
    {
        ERR_WRONG_SP_VERSION = 1, // "wrong
version of stored procs on database server"
        ERR_INVALID_CUST,
        // "Invalid Customer id,name."
        ERR_NO_SUCH_ORDER,
        // "No orders found for customer."
        ERR_RETRIED_TRANS,
        // "Retries before transaction succeeded."
    };
};
CTPCC_ODBC_ERR( int iErr ) { m_errno = iErr;
m_iTryCount = 0; };
CTPCC_ODBC_ERR( int iErr, int iTryCount ) { m_errno =
iErr; m_iTryCount = iTryCount; };
int m_errno;
int m_iTryCount;
int ErrorType() {return ERR_TYPE_TPCC_ODBC};
int ErrorNum() {return m_errno};
char *ErrorText();
};
class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
private:
    // declare variables and private functions here...
    BOOL m_bDeadlock;
    // transaction was selected as deadlock victim
    int m_MaxRetries;
    // retry count on deadlock
    SQLHENV m_henv;
    // ODBC environment handle
    SQLHDBC m_hdbc;
    SQLHSTMT m_hstmt;
    // the current hstmt
    SQLHSTMT m_hstmtNewOrder;
    SQLHSTMT m_hstmtPayment;
    SQLHSTMT m_hstmtDelivery;
    SQLHSTMT m_hstmtOrderStatus;
    SQLHSTMT m_hstmtStockLevel;
    SQLHDESC m_descNewOrderCols1;
    SQLHDESC m_descNewOrderCols2;
    SQLHDESC m_descOrderStatusCols1;
    SQLHDESC m_descOrderStatusCols2;
    // new-order specific fields
    SQLUINTEGER m_bindOffset;
    SQLUINTEGER m_rowsFetched;
    int m_no_commit_Flag;
    void ThrowError( COdbcCERR::ACTION eAction );
    void InitNewOrderParams();
    void InitPaymentParams();
    void InitDeliveryParams();
    void InitStockLevelParams();
    void InitOrderStatusParams();
};
union

```

```

{
    NEW_ORDER_DATA
    PAYMENT_DATA
    DELIVERY_DATA
    STOCK_LEVEL_DATA
    ORDER_STATUS_DATA
    Payment;
    Delivery;
    StockLevel;
    OrderStatus;
    m_txn;
};
public:
    CTPCC_ODBC(LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase);
~CTPCC_ODBC(void);
    inline PNEW_ORDER_DATA { return
BuffAddr_NewOrder() }
    inline PPAYMENT_DATA { return
BuffAddr_Payment() }
    inline PDELIVERY_DATA { return
BuffAddr_Delivery() }
    inline PSTOCK_LEVEL_DATA { return
BuffAddr_StockLevel() }
    inline PORDER_STATUS_DATA { return
BuffAddr_OrderStatus() }
    void NewOrder() ();
    void Payment() ();
    void Delivery() ();
    void StockLevel() ();
    void OrderStatus() ();
};
// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
(LPCSTR szServer, LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase);
typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR, LPCSTR, LPCSTR, LPCSTR);

```

install/install.dsp

```

# Microsoft Developer Studio Project File - Name="install" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **
# TARGETTYPE "win32 (x86) Application" 0x0101
CFG=install - win32 Release
MESSAGE This is not a valid makefile. To build this project using NMAKE,
MESSAGE use the Export Makefile command and run
MESSAGE
MESSAGE NMAKE /f "install.mak".
MESSAGE
MESSAGE You can specify a configuration when running NMAKE
MESSAGE by defining the macro CFG on the command line. For example:
MESSAGE NMAKE /f "install.mak" CFG="install - win32 Release"
MESSAGE
MESSAGE Possible choices for configuration are:
MESSAGE "install - win32 Release" (based on "win32 (x86) Application")
MESSAGE "install - win32 Debug" (based on "win32 (x86) Application")
MESSAGE
# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe
IF "$CFG" == "install - win32 Release"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir ".\Release"
# PROP BASE Intermediate_Dir ".\Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /C
# ADD CPP /nologo /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /C
# ADD BASE MTL /nologo /D "NDEBUG" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /win32
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbccp32.lib /nologo /subsystem:windows /machine:I386
# ADD LINK32 version.lib comctl32.lib kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib

```

```

oleaut32.lib uuid.lib odbccp32.lib odbccp32.lib /nologo /subsystem:windows
/machine:I386 /out:"..\bin\install.exe"

!ELSEIF "$(CFG)" == "install - win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir ".\Debug"
# PROP BASE Intermediate_Dir ".\Debug"
# PROP BASE Target_Dir "."
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir "."
# ADD BASE CPP /nologo /w3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/YX /c
# ADD CPP /nologo /w3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX
/FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /win32
# ADD MTL /nologo /D "_DEBUG" /mkyp11b203 /win32
# ADD BASE RSC /I 0x409 /d "_DEBUG"
# ADD RSC /I 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbccp32.lib odbccp32.lib /nologo /subsystem:windows /debug /machine:I386
# ADD LINK32 version.lib comctl32.lib kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib

oleaut32.lib uuid.lib odbccp32.lib odbccp32.lib /nologo /subsystem:windows /debug
/machine:I386 /out:"..\bin\install.exe"

!ENDIF

# Begin Target

# Name "install - win32 Release"
# Name "install - win32 Debug"
# Begin Group "Source Files"

# PROP Default_Filter "cpp;c;cc;cxx;rc;def;r;odl;hpj;bat;for;f90"
# Begin Source File

SOURCE=.\src\install.c
# End Source File
# Begin Source File

SOURCE=.\src\install.rc
# ADD BASE RSC /I 0x409 /i "src"
# ADD RSC /I 0x409 /i "src" /i "..\src"
# End Source File
# Begin Source File

SOURCE=.\src\install.com.cpp
# End Source File
# End Group
# Begin Group "Header Files"

# PROP Default_Filter "h;hpp;hxx;hm;inl;fi;fd"
# End Group
# Begin Group "Resource Files"

# PROP Default_Filter "ico;cur;bmp;dlg;rc2;rct;bin;cnt;rtf;gif;jpg;jpeg;jpe"
# Begin Source File

SOURCE=.\SRC\ICON1.ICO
# End Source File
# Begin Source File

SOURCE=.\SRC\ICON2.ICO
# End Source File
# End Group
# Begin Source File

SOURCE=.\SRC\LICENSE.TXT
# End Source File
# Begin Source File

SOURCE=.\isapi_d11\bin\tpcc.d11
# End Source File
# Begin Source File

SOURCE=.\tm_com_d11\bin\tpcc.com.d11
# End Source File
# Begin Source File

SOURCE=.\tpcc_com_all\bin\tpcc.com.all.d11
# End Source File
# Begin Source File

SOURCE=.\tpcc_com_ps\bin\tpcc.com.ps.d11
# End Source File
# Begin Source File

SOURCE=.\db_db1b_d11\bin\tpcc.db1b.d11
# End Source File
# Begin Source File

SOURCE=.\db_odbcd11\bin\tpcc.odbcd11
# End Source File
# Begin Source File

SOURCE=.\tm_tuxedo_d11\bin\tpcc.tuxedo.d11
# End Source File
# Begin Source File

```

```

SOURCE=.\tuxapp\bin\tuxapp.exe
# End Source File
# End Target
# End Project

install/src/install.c

/*
 * FILE: INSTALL.C Microsoft TPC-C Kit Ver.
 *
 * 4.20.000 Copyright Microsoft, 1999
 *
 * All Rights Reserved
 *
 * not audited
 *
 * PURPOSE: Automated installation application for TPC-C web kit
 * Contact: Charles Levine (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - added COM installation steps
 */

#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <stdio.h>
#include <commctrl.h>
#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON hInst;
HINSTANCE hInstance;

DWORD versionExeMS;
DWORD versionExeLS;
DWORD versionExeMM;
DWORD versionD11MS;
DWORD versionD11LS;

// TPC-C registry settings
TPCCREGISTRYDATA Reg;

static int iPoolThreadLimit;
static int iThreadTimeout;
static int iListenBackLog;
static int iAcceptExOutstanding;

static int iMaxPhysicalMemory;
static char szLastFileName[64]; // last file
we worked on (for error reporting)

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam,
LPARAM lParam);
BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam,
LPARAM lParam);
BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam,
LPARAM lParam);
BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam,
LPARAM lParam);
static void ProcessOK(HWND hwnd, char *szDllPath);
static void ReadRegistrySettings(void);
static void WriteRegistrySettings(char *szDllPath);
static BOOL RegisterDLL(char *szFileName);
static int CopyFiles(HWND hDlg, char *szDllPath);
static BOOL GetInstallPath(char *szDllPath);
static void GetVersionInfo(char *szDllPath, char *szExePath);
static BOOL CheckWebService(void);
static BOOL StartWebService(void);
static BOOL StopWebService(void);
static void UpdateDialog(HWND hDlg);

BOOL install_com(char *szDllPath);
#include "...\common\src\ReadRegistry.cpp"

int WINAPI WinMain(HINSTANCE hInstance, HINSTANCE hPrevInstance, LPSTR
lpCmdLine, int nCmdShow)
{
    int iRC;
    hInst = hInstance;
    InitCommonControls();
    hIcon = LoadIcon(hInstance, MAKEINTRESOURCE(IDI_ICON1));
    iRC = DialogBox(hInstance, MAKEINTRESOURCE(IDD_DIALOG4),
GetDesktopWindow(), LicenseDlgProc);
    if (iRC)
    {
        iRC = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(), MainDlgProc);
        if (iRC)
        {
            DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(), UpdatedDlgProc, (LPARAM)iRC);
        }
    }
}

```

```

DestroyIcon(hIcon);
return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
    HGLOBAL hRes;
    HRSRC hResInfo;
    BYTE *pSrc, *pDst;
    DWORD dwSize;
    static HFONT hFont;

    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12, 0, 0, 0, 0, 400, 0,
0, 0, 0, 0, 0, 0, "Arial");
            SendMessage(GetDlgItem(hwnd,
IDR_LICENSE1), WM_SETFONT, (WPARAM)hFont, MAKELPARAM(0, 0));
            PostMessage(hwnd, WM_INITTEXT, (WPARAM)0,
(LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo = FindResource(hInst,
hResInfo);
            dwSize = sizeofResource(hInst,
hResInfo);
            hRes = LoadResource(hInst, hResInfo);
            pSrc = (BYTE *)LockResource(hRes);
            pDst = (unsigned char *)malloc(dwSize+1);
            if (pDst)
            {
                memcpy(pDst, pSrc,
dwSize);
                pDst[dwSize] = 0;
                SetDlgItemText(hwnd,
IDC_LICENSE, (const char *)pDst);
            }
            else
                SetDlgItemText(hwnd,
IDC_LICENSE, (const char *)pSrc);
            return TRUE;
        case WM_DESTROY:
            DeleteObject(hFont);
            return TRUE;
        case WM_COMMAND:
            if (wParam == IDOK)
                EndDialog(hwnd, TRUE);
            if (wParam == IDCANCEL)
                EndDialog(hwnd, FALSE);
            default:
                break;
    }
    return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:
                    SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C web Client Installed");
                    break;
            }
            return TRUE;
        case WM_COMMAND:
            if (wParam == IDOK)
                EndDialog(hwnd, TRUE);
            default:
                break;
    }
    return FALSE;
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFOV;
    char szTmp[256];
    static char szDllPath[256];
    static char szExePath[256];

    switch(uMsg)
    {
        case WM_INITDIALOG:
            GlobalMemoryStatus(&memoryStatus);
            iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);
            if ( GetInstallPath(szDllPath) )
            {
                MessageBox(hwnd, "Error
internet service inetrv is not installed.", NULL, MB_ICONSTOP | MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }
            // set default values
            ZeroMemory(&Reg, sizeof(Reg));
            Reg.dwNumberOfDeliveryThreads = 4;
            Reg.dwMaxConnections = 100;
            Reg.dwMaxPendingDeliveries = 100;
            Reg.edb_protocol = DBLIB;
    }
}

```



```

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, NULL, REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS,
NULL, &hkey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hkey, "Path", 0, REG_SZ, szTmp,
strlen(szTmp)+1);

        RegSetValueEx(hkey, "NumberOfDeliveryThreads", 0,
REG_DWORD, (char *)&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));
        RegSetValueEx(hkey, "MaxConnections", 0, REG_DWORD,
(char *)&Reg.dwMaxConnections, sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hkey, "MaxPendingDeliveries", 0,
REG_DWORD, (char *)&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hkey, "DB_Protocol", 0, REG_SZ,
szDBNames[Reg.edb_Protocol], strlen(szDBNames[Reg.edb_Protocol])+1);
        RegSetValueEx(hkey, "TxnMonitor", 0, REG_SZ,
szTxnMonNames[Reg.etxnMon], strlen(szTxnMonNames[Reg.etxnMon])+1);

        RegSetValueEx(hkey, "DbServer", 0, REG_SZ,
Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hkey, "DbName", 0, REG_SZ, Reg.szDbName,
strlen(Reg.szDbName)+1);
        RegSetValueEx(hkey, "DbUser", 0, REG_SZ, Reg.szDbUser,
strlen(Reg.szDbUser)+1);
        RegSetValueEx(hkey, "DbPassword", 0, REG_SZ,
Reg.szDbPassword, strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hkey, "COM_SinglePool", 0, REG_SZ,
szTmp, strlen(szTmp)+1);

        RegFlushKey(hkey);
        RegCloseKey(hkey);
    }

    if ( (irc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\InetInfo\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hkey, &dwDisposition) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hkey, "PoolThreadLimit", 0, REG_DWORD,
sizeof(iPoolThreadLimit));
        RegSetValueEx(hkey, "ThreadTimeout", 0, REG_DWORD,
sizeof(iThreadTimeout));
        RegSetValueEx(hkey, "ListenBackLog", 0, REG_DWORD,
sizeof(iListenBackLog));

        RegFlushKey(hkey);
        RegCloseKey(hkey);
    }

    if ( (irc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hkey, &dwDisposition) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hkey, "AcceptExOutstanding", 0,
REG_DWORD, (char *)&iAcceptExOutstanding, sizeof(iAcceptExOutstanding));

        RegFlushKey(hkey);
        RegCloseKey(hkey);
    }

    return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd, IDC_PROGRESS1, PBM_SETRANGE,
0, MAKELPARAM(0, 16));
        SendDlgItemMessage(hwnd, IDC_PROGRESS1, PBM_SETPSTEP,
(WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC lpDllEntryPoint;

    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib, "DllRegisterserver");
    if (lpDllEntryPoint != NULL)
    {
        return ((*lpDllEntryPoint)()) == S_OK;
    }
    else
        return FALSE; //unable to locate entry point
}

BOOL FileFromResource( char *szResourceName, int iResourceId, char *szDllPath,

```

```

char *szFileName )
{
    HGLOBAL hDLL;
    HRSRC hResInfo;
    HANDLE hFile;
    DWORD dwSize;
    BYTE *pSrc;
    DWORD d;
    char szFullName[256];

    hResInfo = FindResource(hInst, MAKEINTRESOURCE(iResourceId),
szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = sizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( ! (hFile = CreateFile(szFullName, GENERIC_WRITE, 0, NULL,
CREATE_ALWAYS, FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !writeFile(hFile, pSrc, dwSize, &d, NULL) )
        return FALSE;

    CloseHandle(hFile);
    unlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath)
{
    BOOL bSvcRunning;

    bSvcRunning = CheckWebService();
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS, "Stopping web
Service.");
        SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
        UpdateDialog(hDlg);
        StopWebService();
        SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
        UpdateDialog(hDlg);
    }

    SetDlgItemText(hDlg, IDC_STATUS, "Copying Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install TPCC_DLL
    strcpy( szLastFileName, "tpcc.dll" );
    if ( !FileFromResource( "TPCCDLL", IDR_TPCCDLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_dblib.dll
    strcpy( szLastFileName, "tpcc_dblib.dll" );
    if ( !FileFromResource( "DBLIB_DLL", IDR_DBLIB_DLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_odbc.dll
    strcpy( szLastFileName, "tpcc_odbc.dll" );
    if ( !FileFromResource( "ODBC_DLL", IDR_ODBC_DLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tuxapp.exe
    strcpy( szLastFileName, "tuxapp.exe" );
    if ( !FileFromResource( "TUXEDO_APP", IDR_TUXEDO_APP, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_tuxedo.dll
    strcpy( szLastFileName, "tpcc_tuxedo.dll" );
    if ( !FileFromResource( "TUXEDO_DLL", IDR_TUXEDO_DLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com.dll
    strcpy( szLastFileName, "tpcc_com.dll" );
    if ( !FileFromResource( "COM_DLL", IDR_COM_DLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_all.tlb
    strcpy( szLastFileName, "tpcc_com_all.tlb" );
    if ( !FileFromResource( "COM_TYPLIB", IDR_COMTYPLIB_DLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
}

```

```

    UpdateDialog(hDlg);

    // install tpcc_com_ps.dll
    strcpy( szLastFileName, "tpcc_com_ps.dll" );
    if ( !FileFromResource( "COM_PS_DLL", IDR_COMPS_DLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_all.dll
    strcpy( szLastFileName, "tpcc_com_all.dll" );
    if ( !FileFromResource( "COM_ALL_DLL", IDR_COMALL_DLL, szDllPath,
szLastFileName ) )
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    //if we stopped service restart it.
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS, "Starting web
Service.");
        SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0,
0);
        UpdateDialog(hDlg);
        StartWebService();
    }

    SendDlgItemMessage(hDlg, IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY hkey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRC;
    int len;
    int iRC;

    // Registry key
    HKEY_LOCAL_MACHINE\\SOFTWARE\\Microsoft\\InetStp\\PathWWWroot is used to find the
// IIS default web site directory and determine that IIS is
installed.

    szDllPath[0] = 0;
    bRC = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\InetStp", 0, KEY_ALL_ACCESS, &hkey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRC = RegQueryValueEx( hkey, "PathWWWroot", NULL,
NULL, szData, &sv ); // used by IIS 5.0 & 6.0
        if ( iRC == ERROR_SUCCESS )
        {
            bRC = FALSE;
            strcpy(szDllPath, szData);
            len = strlen(szDllPath);
            if ( szDllPath[len-1] != '\\ ' )
            {
                szDllPath[len] = '\\';
                szDllPath[len+1] = 0;
            }
        }
        RegCloseKey(hkey);
    }

    return bRC;
}

static void GetVersionInfo(char *szDLLPath, char *szExePath)
{
    DWORD d;
    DWORD dwSize;
    DWORD dwBytes;
    char *ptr;
    VS_FIXEDFILEINFO *vs;

    versionDllMS = 0;
    versionDllLS = 0;
    if ( _access(szDllPath, 00) == 0 )
    {
        dwSize = GetFileVersionInfoSize(szDLLPath, &d);
        if ( dwSize )
        {
            ptr = (char *)malloc(dwSize);
            GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
            VerQueryValue(ptr, "\\&vs", &dwBytes);
            versionDllMS = vs->dwProductVersionMS;
            versionDllLS = vs->dwProductVersionLS;
            Free(ptr);
        }
    }

    versionExeMS = 0x7FFF;
    versionExeLS = 0x7FFF;
    dwSize = GetFileVersionInfoSize(szExePath, &d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szExePath, 0, dwSize, ptr);
        VerQueryValue(ptr, "\\&vs", &dwBytes);
        versionExeMS = vs->dwProductVersionMS;
        versionExeLS = LOWORD(vs->dwProductVersionLS);
    }
}

```

```

        versionExEMM = HIWORD(vs->dwProductVersionLS);
        Free(ptr);
    }
    return;
}
static BOOL CheckWebService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;

    schSCManager = OpenSCManager(NULL, NULL, SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("w3svc"),
SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!QueryServiceStatus(schService, &ssStatus))
        goto ServiceNotRunning;

    if (!ControlService(schService, SERVICE_CONTROL_STOP,
&ssStatus))
        goto ServiceNotRunning;
    //start service pending, Check the status until the service is
running.
    if (!QueryServiceStatus(schService, &ssStatus))
        goto ServiceNotRunning;

    CloseServiceHandle(schService);
    return TRUE;

ServiceNotRunning:
    CloseServiceHandle(schService);
    return FALSE;
}
static BOOL StartWebService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL, SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("w3svc"),
SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!StartService(schService, 0, NULL))
        goto StartWebWebErr;
    //start service pending, Check the status until the service is
running.
    if (!QueryServiceStatus(schService, &ssStatus))
        goto StartWebWebErr;
    while( ssStatus.dwCurrentState != SERVICE_RUNNING)
    {
        dwOldCheckPoint = ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //wait for
the specified interval.
        if (!QueryServiceStatus(schService, &ssStatus))
            //check the status again. break;
            //Break if the checkpoint has not been incremented.
            break;

        if (ssStatus.dwCurrentState == SERVICE_RUNNING)
            goto StartWebWebErr;

        CloseServiceHandle(schService);
        return TRUE;
    }

StartWebWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}
static BOOL StopWebService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL, SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager, TEXT("w3svc"),
SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!QueryServiceStatus(schService, &ssStatus))
        goto StopWebWebErr;

    if (!ControlService(schService, SERVICE_CONTROL_STOP,
&ssStatus))
        goto StopWebWebErr;
    //start service pending, Check the status until the service is
running.
    if (!QueryServiceStatus(schService, &ssStatus))
        goto StopWebWebErr;
    while( ssStatus.dwCurrentState == SERVICE_RUNNING)
    {
        dwOldCheckPoint = ssStatus.dwCheckPoint;
        //Save the current checkpoint.

```

```

        Sleep(ssStatus.dwWaitHint);
    }
}
the specified interval.
if (!QueryServiceStatus(schService, &ssStatus))
    //check the status again. break;
    if (dwOldCheckPoint >= ssStatus.dwCheckPoint)
        //Break if the checkpoint has not been incremented.
        break;
}
if (ssStatus.dwCurrentState == SERVICE_RUNNING)
    goto StopWebWebErr;

CloseServiceHandle(schService);
return TRUE;

StopWebWebErr:
CloseServiceHandle(schService);
return FALSE;
}
static void UpdateDialog(HWND hDlg)
{
    MSG msg;

    updatewindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0, PM_REMOVE))
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

```

install/src/install.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc

#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TPCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108

#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003
#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB 1021
#define IDC_ODBC 1022

#define ED_USER_CONNECT_DELAY_TIME 1024

// Next default values for new objects

```

install/src/install.rc

```

//Microsoft Developer Studio generated resource script.
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
//
// Generated from the TEXTINCLUDE 2 resource.
#include "afxres.h"
#undef APSTUDIO_READONLY_SYMBOLS

// English (U.S.) resources
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

```

```

// Dialog
IDD_DIALOG1 DIALOGEX 0, 0, 219, 351
STYLE DS_MODALFRAME | DS_CENTER | WS_MINIMIZEBOX | WS_POPUP | WS_CAPTION |
WS_SYSCAPTION
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT          ED_THREADS,164,45,34,12,ES_RIGHT | ES_NUMBER,
WS_EX_RTLREADING
    EDITTEXT          ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
WS_EX_RTLREADING
    EDITTEXT          ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
WS_EX_RTLREADING
    CONTROL           "None",IDC_TM_NONE,"Button",BS_AUTORADIOBUTTON |
WS_GROUP | WS_TABSTOP,43,100,33,10
    CONTROL           "COM",IDC_TM_MTS,"Button",BS_AUTORADIOBUTTON |
WS_TABSTOP,43,113,32,10
    CONTROL           "TUXEDO",IDC_TM_TUXEDO,"Button",BS_AUTORADIOBUTTON |
WS_TABSTOP,106,100,46,10
    CONTROL           "ENCINA",IDC_TM_ENCINA,"Button",BS_AUTORADIOBUTTON |
WS_DISABLED | WS_TABSTOP,106,113,43,10
    EDITTEXT          ED_DB_SERVER,131,152,67,12,ES_AUTOHSCROLL
    EDITTEXT          ED_DB_USER_ID,131,165,67,12,ES_AUTOHSCROLL
    EDITTEXT          ED_DB_PASSWORD,131,178,67,12,ES_AUTOHSCROLL
    EDITTEXT          ED_DB_NAME,131,191,67,12,ES_AUTOHSCROLL
    CONTROL           "DBLIB",IDC_DBLIB,"Button",BS_AUTORADIOBUTTON | WS_GROUP |
WS_TABSTOP,45,219,39,12
    CONTROL           "ODBC",IDC_ODBC,"Button",BS_AUTORADIOBUTTON | WS_TABSTOP,
91,219,39,12
    EDITTEXT          ED_IIS_MAX_THREAD_POOL_LIMIT,164,263,34,12,ES_RIGHT |
ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT          ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,164,277,34,12,ES_RIGHT |
ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT          ED_IIS_THREAD_TIMEOUT,164,291,34,12,ES_RIGHT | ES_NUMBER,
WS_EX_RTLREADING
    EDITTEXT          ED_IIS_LISTEN_BACKLOG,164,305,34,12,ES_RIGHT | ES_NUMBER,
WS_EX_RTLREADING
    DEFPUSHBUTTON    "OK",IDOK,53,331,50,14
    PUSHBUTTON       "Cancel",IDCANCEL,119,331,50,14
    EDITTEXT          IDC_PATH,106,26,91,13,ES_AUTOHSCROLL | ES_READONLY
    LTEXT             "Number of Delivery Threads:",IDC_STATIC,35,45,115,12
    LTEXT             "Max Number of Connections:",IDC_STATIC,35,73,115,12
    RTEXT             "Version 4.11",IDC_VERSION,120,4,89,9
    LTEXT             "IIS Max Thread Pool Limit:",IDC_STATIC,36,263,115,12
    LTEXT             "Web Service Backlog Queue Size:",IDC_STATIC,36,277,115,
12
    LTEXT             "IIS Thread Timeout (seconds):",IDC_STATIC,36,291,115,12
    LTEXT             "IIS Listen Backlog:",IDC_STATIC,36,307,115,10
    GROUPBOX          "Database Interface",IDC_STATIC,35,208,163,27,WS_GROUP
    LTEXT             "Installation directory:",IDC_STATIC,35,29,71,10
    GROUPBOX          "Transaction Monitor",IDC_STATIC,33,90,165,37
    LTEXT             "Server Name:",IDC_STATIC,35,155,56,8
    LTEXT             "User ID:",IDC_STATIC,35,168,60,8
    LTEXT             "User Password:",IDC_STATIC,35,181,83,8
    LTEXT             "Database Name:",IDC_STATIC,35,194,54,8
    GROUPBOX          "SQL Server Connection Properties",IDC_STATIC,22,139,187,
102
    GROUPBOX          "Web Client Properties",IDC_STATIC,22,15,187,118
    GROUPBOX          "IIS Settings",IDC_STATIC,22,247,187,79
    LTEXT             "Max Pending Deliveries:",IDC_STATIC,35,59,115,12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFOREGROUND | DS_3DLOOK | DS_CENTER | WS_POPUP | WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON    "OK",IDOK,33,45,50,9
    CTEXT            "HTML TPC-C Installation Successful",IDC_RESULTS,7,22,
102,18,0,WS_EX_CLIENTEDGE
    ICON             IDI_ICON2,IDC_STATIC,50,7,18,20,SS_REALSIZEIMAGE,
WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG DISCARDABLE 0, 0, 91, 40
STYLE DS_SYSMODAL | DS_MODALFRAME | DS_3DLOOK | DS_CENTER | WS_CAPTION
CAPTION "Installing TPC-C web client"
FONT 12, "Arial Black"
BEGIN
    CONTROL          "Progress1",IDC_PROGRESS1,"msctl_progress32",WS_BORDER,
7,20,77,13
    CTEXT            "Static",IDC_STATUS,7,7,77,12,SS_SUNKEN
END

IDD_DIALOG4 DIALOG DISCARDABLE 0, 0, 291, 202
STYLE DS_MODALFRAME | DS_CENTER | WS_POPUP | WS_CAPTION | WS_SYSCAPTION
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT          IDC_LICENSE,7,7,271,167,ES_MULTILINE | ES_AUTOVSCROLL |
ES_AUTOHSCROLL | ES_READONLY | WS_VSCROLL | WS_HSCROLL
    DEFPUSHBUTTON    "Agree",IDOK,87,181,50,14
    PUSHBUTTON       "&Cancel",IDCANCEL,153,181,50,14
END

//
//
// DESIGNINFO
//
#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
    END
END

```

```

TOPMARGIN, 4
BOTTOMMARGIN, 345
END
IDD_DIALOG2, DIALOG
BEGIN
LEFTMARGIN, 7
RIGHTMARGIN, 109
TOPMARGIN, 7
BOTTOMMARGIN, 54
END
IDD_DIALOG3, DIALOG
BEGIN
LEFTMARGIN, 7
RIGHTMARGIN, 84
TOPMARGIN, 7
BOTTOMMARGIN, 33
END
IDD_DIALOG4, DIALOG
BEGIN
LEFTMARGIN, 7
RIGHTMARGIN, 278
TOPMARGIN, 7
BOTTOMMARGIN, 195
END
END
#endif // APSTUDIO_INVOKED

#ifdef APSTUDIO_INVOKED
//////////////////////////////////////
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
"resource.h\0"
END
2 TEXTINCLUDE DISCARDABLE
BEGIN
"#include ""afxres.h""\r\n"
"\0"
END
3 TEXTINCLUDE DISCARDABLE
BEGIN
"\r\n"
"\0"
END
#endif // APSTUDIO_INVOKED

//////////////////////////////////////
// Icon
//
// Icon with lowest ID value placed first to ensure application icon
// remains consistent on all systems.
IDI_ICON1 ICON DISCARDABLE "icon1.ico"
IDI_ICON2 ICON DISCARDABLE "icon2.ico"

//////////////////////////////////////
// TPCDLL
//
IDR_TPCDLL TPCDLL DISCARDABLE
"..\\..\\isapi_d11\\bin\\tpcc.d11"

#ifdef _MAC
//////////////////////////////////////
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,20,0
PRODUCTVERSION 0,4,20,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILES 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904b0"
BEGIN
VALUE "Comments", "TPC-C Web Client Installer\0"
VALUE "CompanyName", "Microsoft\0"
VALUE "FileDescription", "install\0"
VALUE "FileVersion", "0,4,20,0\0"
VALUE "InternalName", "install\0"
VALUE "LegalCopyright", "Copyright © 1999\0"
VALUE "OriginalFilename", "install.exe\0"
VALUE "ProductName", "Microsoft Install\0"
VALUE "ProductVersion", "0,4,20,0\0"
END
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200

```

```

END
#endif // !_MAC

//////////////////////////////////////
// LICENSE
//
IDR_LICENSE1 LICENSE DISCARDABLE "license.txt"

//////////////////////////////////////
// DBLIB_DLL
//
IDR_DBLIB_DLL DBLIB_DLL DISCARDABLE
"..\\..\\db_dblib_d11\\bin\\tpcc_dblib.d11"

//////////////////////////////////////
// ODBC_DLL
//
IDR_ODBC_DLL ODBC_DLL DISCARDABLE
"..\\..\\db_odbc_d11\\bin\\tpcc_odbc.d11"

//////////////////////////////////////
// TUXEDO_APP
//
IDR_TUXEDO_APP TUXEDO_APP DISCARDABLE
"..\\..\\tuxapp\\bin\\tuxapp.exe"

//////////////////////////////////////
// TUXEDO_DLL
//
IDR_TUXEDO_DLL TUXEDO_DLL DISCARDABLE
"..\\..\\tm_tuxedo_d11\\bin\\tpcc_tuxedo.d11"

//////////////////////////////////////
// COM_DLL
//
IDR_COM_DLL COM_DLL DISCARDABLE
"..\\..\\tm_com_d11\\bin\\tpcc_com.d11"

//////////////////////////////////////
// COM_PS_DLL
//
IDR_COMPS_DLL COM_PS_DLL DISCARDABLE
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.d11"

//////////////////////////////////////
// COM_ALL_DLL
//
IDR_COMALL_DLL COM_ALL_DLL DISCARDABLE
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.d11"

//////////////////////////////////////
// COM_TYPLIB
//
IDR_COMTYPLIB_DLL COM_TYPLIB DISCARDABLE
"..\\..\\tpcc_com_all\\src\\tpcc_com_all.tlb"

#endif // English (U.S.) resources

#ifdef APSTUDIO_INVOKED
//////////////////////////////////////
// Generated from the TEXTINCLUDE 3 resource.
//
#endif // not APSTUDIO_INVOKED

```

install/src/install_com.cpp

```

/* FILE: INSTALL_COM.CPP
 * Microsoft TPC-C Kit Ver.
 * 4.20.000 Copyright Microsoft, 1999
 * All Rights Reserved
 * not audited
 * PURPOSE: installation code for COM application for TPC-C web
 * Kit
 * Contact: Charles Levine (clevine@microsoft.com)
 */

```

```

* Change history:
* 4.20.000 - first version
*/

#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp = NULL;
    ICatalogCollection* pCatalogCollectionCo = NULL;
    ICatalogCollection* pCatalogCollectionIf = NULL;
    ICatalogCollection* pCatalogCollectionMethod = NULL;

    ICatalogObject* pCatalogObjectApp =
    NULL;
    ICatalogObject* pCatalogObjectCo =
    NULL;
    ICatalogObject* pCatalogObjectIf =
    NULL;
    ICatalogObject* pCatalogObjectMethod =
    NULL;

    bstrTemp,
    bstrTemp2, bstrTemp3, bstrTemp4;
    szDllPath;
    _variant_t VTmp, vKey;
    ICount, lCountCo, lCountIf, lCountMethod;
    bool bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);
    HRESULT hr = CoCreateInstance(CLSID_COMAdminCatalog,
    NULL,
    CLSCTX_INPROC_SERVER,
    IID_ICOMAdminCatalog,
    (void**) &pCOMAdminCat);

    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "Applications";
    // Attempt to connect to "Applications" in the Catalog
    hr = pCOMAdminCat->GetCollection(bstrTemp,
    (IDispatch**) &pCatalogCollectionApp);
    if (!SUCCEEDED(hr)) goto Error;

    // Attempt to load the "Applications" collection
    hr = pCatalogCollectionApp->Populate();
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionApp->get_Count(&lCount);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through applications to delete existing "TPC-C"
    application (if any)
    while (lCount > 0)
    {
        hr = pCatalogCollectionApp->get_Item(lCount - 1,
        (IDispatch**) &pCatalogObjectApp);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogObjectApp->get_Name(&vTmp);
        if (!SUCCEEDED(hr)) goto Error;

        if (wcsncmp(vTmp.bstrVal, L"TPC-C"))
        {
            lCount--;
            continue;
        }
        else
        {
            hr = pCatalogCollectionApp->
            Remove(lCount - 1);
            if (!SUCCEEDED(hr)) goto Error;
            break;
        }
    }

    hr = pCatalogCollectionApp->SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

    // add the new application
    hr = pCatalogCollectionApp->Add((IDispatch**) &pCatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

    // set properties
    bstrTemp = "Name";
    VTmp = "TPC-C";
    hr = pCatalogObjectApp->put_Value(bstrTemp, VTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // set as a library (in process) application
    bstrTemp = "Activation";

```

```

IactProp = COMAdminActivationInProc;
vTmp = IactProp;
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set security level to process
bstrTemp = "AccessChecksLevel1";
IactProp = COMAdminAccessChecksApplicationLevel;
vTmp = IactProp;
hr = pCatalogObjectApp->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

// save key to get the Components collection later
hr = pCatalogObjectApp->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

// save changes (app creation) so component installation will work
hr = pCatalogCollectionApp->SaveChanges(&IactProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectApp->Release();
pCatalogObjectApp = NULL;

bstrTemp = "TPC-C";
// app name
bstrTemp2 = bstrDllPath + "tpcc_com_all.dll";
// DLL
bstrTemp3 = bstrDllPath + "tpcc_com_all.tlb";
// type library (TLB)
bstrTemp4 = bstrDllPath + "tpcc_com_ps.dll";
// proxy/stub dll

hr = pCOMAdminCat->InstallComponent(bstrTemp,
                                     bstrTemp2,
                                     bstrTemp3,
                                     bstrTemp4);

if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Components";
hr = pCatalogCollectionApp->GetCollection(bstrTemp, vKey,
(IDispatch**) &pCatalogCollectionCo);
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->get_Count(&lCountCo);
if (!SUCCEEDED(hr)) goto Error;

properties // iterate through components in application and set the
while (lCountCo > 0)
{
(IDispatch**) &pCatalogObjectCo;
hr = pCatalogCollectionCo->get_Item(lCountCo - 1,
                                     &pCatalogObjectCo);
if (!SUCCEEDED(hr)) goto Error;

// used for debugging (view the name)
hr = pCatalogObjectCo->get_Name(&vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "ConstructionEnabled";
bTmp = TRUE;
vTmp = bTmp;
hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "ConstructorString";
bstrTemp2 = "dummy string (do not remove)";
vTmp = bstrTemp2;
hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "JustInTimeActivation";
bTmp = TRUE;
vTmp = bTmp;
hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "MaxPoolSize";
vTmp.Clear(); // clear variant so it isn't stored as a
bool (_variant_t feature) vTmp = (long)30;
hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "ObjectPoolingEnabled";
bTmp = TRUE;
vTmp = bTmp;
hr = pCatalogObjectCo->put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto Error;

collection // save key to get the InterfacesForComponent
hr = pCatalogObjectCo->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "InterfacesForComponent";
hr = pCatalogCollectionCo->GetCollection(bstrTemp,
vKey, (IDispatch**) &pCatalogCollectionItf);
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionItf->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionItf->get_Count(&lCountItf);

```

```

if (!SUCCEEDED(hr)) goto Error;
// iterate through interfaces in component
while (lCountItf > 0)
{
>get_Item(lCountItf - 1, (IDispatch**)
&pCatalogCollectionItf);
if (!SUCCEEDED(hr)) goto Error;

MethodsForInterface collection // save key to get the
hr = pCatalogObjectItf->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "MethodsForInterface";
hr = pCatalogCollectionItf->
>GetCollection(bstrTemp, vKey, (IDispatch**)
&pCatalogCollectionMethod);
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionMethod->
>Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionMethod->
>get_Count(&lCountMethod);
if (!SUCCEEDED(hr)) goto Error;

// iterate through methods of interface
while (lCountMethod > 0)
{
pCatalogCollectionMethod->get_Item(lCountMethod - 1, (IDispatch**)
&pCatalogObjectMethod);
if (!SUCCEEDED(hr)) goto
Error;

bstrTemp = "AutoComplete";
bTmp = TRUE;
vTmp = bTmp;
hr = pCatalogObjectMethod->
>put_Value(bstrTemp, vTmp);
if (!SUCCEEDED(hr)) goto
Error;

>Release();
pCatalogObjectMethod->
NULL;
} lCountMethod--;

// save changes
hr = pCatalogCollectionMethod->
>SaveChanges(&IactProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectItf->Release();
pCatalogObjectItf = NULL;
lCountItf--;
}

pCatalogObjectCo->Release();
pCatalogObjectCo = NULL;
lCountCo--;

// save changes
hr = pCatalogCollectionCo->SaveChanges(&IactProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogCollectionApp->Release();
pCatalogCollectionApp = NULL;

pCatalogCollectionCo->Release();
pCatalogCollectionCo = NULL;

pCatalogCollectionItf->Release();
pCatalogCollectionItf = NULL;

pCatalogCollectionMethod->Release();
pCatalogCollectionMethod = NULL;

Error:
CoInitialize();
if (!SUCCEEDED(hr))
{
LPTSTR lpBuf;
DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER | FORMAT_MESSAGE_FROM_SYSTEM,
              NULL,
              hr,
              MAKELANGID(LANG_NEUTRAL),
              SUBLANG_DEFAULT),
              (LPTSTR) &lpBuf,
              0,
              NULL);
_tprintf(_T("Error adding components. HRESULT:
0x%x\n%s"), hr, lpBuf);

```

```

}
else
return FALSE;
}
return TRUE;

```

install/src/RESOURCE.H

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//
#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TPCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108
#define IDR_LICENSE1 112
#define IDD_DIALOG4 113
#define IDR_TPCOBJ1 117
#define IDR_TPCSTUB1 118
#define IDR_DBLB_DLL 122
#define IDR_ODBC_DLL 123
#define IDR_TUXEDO_APP 124
#define IDR_TUXEDO_DLL 125
#define IDR_COM_DLL 126
#define IDR_COMPS_DLL 127
#define IDR_COMALL_DLL 128
#define IDR_COMTYPLIB_DLL 129
#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003
#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_MAXDELIVERIES 1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB 1021
#define IDC_LICENSE 1022
#define IDC_ODBC 1022
#define IDC_CONNECT_POOL 1023
#define ED_DB_SERVER 1023
#define ED_USER_CONNECT_DELAY_TIME 1024
#define ED_DB_USER_ID 1024
#define IDC_MTS 1025
#define IDC_TM_MTS 1025
#define IDC_TM_TUXEDO 1026
#define IDC_TM_NONE 1027
#define ED_DB_PASSWORD 1028
#define ED_DB_NAME 1029
#define IDC_TM_ENCINA 1030

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 130
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1031
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

isapi_dll/isapi_dll.dsp

```

# Microsoft Developer Studio Project File - Name="isapi_dll" - Package Owner=4
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "win32 (x86) Dynamic-Link Library" 0x0102

CFG=isapi_dll - win32 IceCAP
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "isapi_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "isapi_dll.mak" CFG="isapi_dll - win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE "isapi_dll - win32 Release" (based on "win32 (x86) dynamic-link
!MESSAGE Library")
!MESSAGE "isapi_dll - win32 Debug" (based on "win32 (x86) dynamic-link
!MESSAGE Library")
!MESSAGE "isapi_dll - win32 IceCAP" (based on "win32 (x86) dynamic-link
!MESSAGE Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0

```

```

# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=c1.exe
MTL=mdl.exe
RSC=rc.exe

IF "$(CFG) == "isapi_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /w3 /GX /O2 /D "NDEBUG" /D "WIN32" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel132.lib user32.lib gdi32.lib winspool.lib cmdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386
/out:".bin\tpcc.dll" /pdbtype:sept
# SUBTRACT LINK32 /profile /pdb:none /map

!ELSEIF "$(CFG) == "isapi_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTD /w3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /w3 /GX /ZI /Od /D "NDEBUG" /D "WIN32" /D "_WINDOWS" /FR /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel132.lib user32.lib gdi32.lib winspool.lib cmdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386 /pdbtype:sept
# ADD LINK32 ..\common\txnlog\lib\debug\rtetime.lib ..\common\txnlog\lib\debug\spinlock.lib ..\common\txnlog\lib\debug\error.lib

..\common\txnlog\lib\debug\txnlog.lib wsock32.lib kernel132.lib user32.lib gdi32.lib winspool.lib cmdlg32.lib advapi32.lib shell32.lib

ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386 /nodefaultlib:"LIBCMDT"

/out:".bin\tpcc.dll" /pdbtype:sept
# SUBTRACT LINK32 /profile /pdb:none /nodefaultlib

!ELSEIF "$(CFG) == "isapi_dll - Win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "isapi_dll"
# PROP BASE Intermediate_Dir "isapi_dll"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MDd /w3 /GX /ZI /Od /D "NDEBUG" /D "WIN32" /D "_WINDOWS" /FR /YX /FD /Gh /c
# ADD CPP /nologo /MDd /w3 /GX /ZI /Od /D "NDEBUG" /D "ICECAP" /D "WIN32" /D "_WINDOWS" /FR /YX /FD /Gh /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD BASE RSC /I 0x409 /d "NDEBUG"

```

```

# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel132.lib user32.lib gdi32.lib winspool.lib cmdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386 /out:".bin\tpcc.dll" /pdbtype:sept
# SUBTRACT LINK32 /profile /pdb:none

!ENDIF

# Begin Target

# Name "isapi_dll - Win32 Release"
# Name "isapi_dll Win32 Debug"
# Name "isapi_dll - Win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.cpp, *.def, *.rc"
# Begin Source File

SOURCE=.\src\tpcc.cpp
# End Source File
# Begin Group

SOURCE=.\src\tpcc.def
# End Source File
# Begin Group

SOURCE=.\src\tpcc.rc
# End Source File
# End Group
# Begin Group "Header Files"

# PROP Default_Filter "*.h, *.hpp"
# Begin Source File

SOURCE=..\common\src\error.h
# End Source File
# Begin Group

SOURCE=..\common\src\ReadRegistry.h
# End Source File
# Begin Group

SOURCE=.\src\tpcc.h
# End Source File
# Begin Group

SOURCE=..\db_dblib_dll\src\tpcc_dblib.h
# End Source File
# Begin Group

SOURCE=..\db_odbc_dll\src\tpcc_odbc.h
# End Source File
# Begin Group

SOURCE=..\tm_tuxedo_dll\src\tpcc_tux.h
# End Source File
# Begin Group

SOURCE=..\common\src\trans.h
# End Source File
# Begin Group

SOURCE=..\common\src\txn_base.h
# End Source File
# End Target
# End Project

```

isapi_dll/src/resource.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
#define IDD_DIALOG1 101
// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

isapi_dll/src/tpcc.cpp

```

/* FILE: TPCC.C Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* Version 4.10.000 audited
* by Richard Gimarc, Performance Metrics, 3/17/99
*
* PURPOSE: Main module for TPCC.DLL which is an ISAPI service
dll. Contact: Charles Levine (clevine@microsoft.com)
*
* Change history:
* 4.20.000 - reworked error handling; added options for
COM and Encina txn monitors
*/

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <string.h>
#include <stdlib.h>
#include <malloc.h>
#include <string.h>
#include <time.h>
#include <sys/timeb.h>
#include <i.h>
#include <assert.h>

#include <sqltypes.h>

#ifdef ICECAP
#include <icexp.h>
#endif

#include "..\..\common\src\trans.h" //tpckit transaction
header contains definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"

#include "..\..\common\txnlog\include\rtetime.h"
#include "..\..\common\txnlog\include\spinlock.h"
#include "..\..\common\txnlog\include\txnlog.h"

// Database layer includes
#include "..\..\db_dblib_dll\src\tpcc_dblib.h" // DBLIB
implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h" // ODBC
implementation of TPC-C txns

// Txn monitor layer includes
#include "..\..\tm_com_dll\src\tpcc_com.h"
// COM Services implementation on TPC-C txns
#include "..\..\tm_tuxedo_dll\src\tpcc_tux.h" // interface
to Tuxedo libraries
#include "..\..\tm_encina_dll\src\tpcc_enc.h" // interface
to Encina libraries

#include "httpext.h" //ISAPI DLL
information header
#include "tpcc.h" //this dlls specific structure, value e.t. header.

#define LEN_ERR_STRING 256

// defines for MakeTxn>Form calls to distinguish input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version level of this web client
interface.
// The RTE must be synchronized with the interface level on login, otherwise the
login
// will fail. This is a sanity check to catch problems resulting from
mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "410"

static CRITICAL_SECTION TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_TUXEDO *pCTPCC_TUXEDO_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_post_init;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred delivery txns:
CTxnLog *TxnLog; //used to log delivery transaction
NULL;
Information
HANDLE hWorkerSemaphore = INVALID_HANDLE_VALUE;

```

```

HANDLE = INVALID_HANDLE_VALUE;          hDoneEvent
HANDLE = NULL;                          *pDelihandles
// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD dwNumDeliveryThreads = 4;
CRITICAL_SECTION delBuffCriticalSection;
//critical section for delivery transactions cache
DELIVERY_TRANSACTION *pDelBuff = NULL;
DWORD dwDelBuffSize = 100; // size of circular buffer for delivery
txns
DWORD dwDelBuffFreeCount; // number of buffers free
DWORD dwDelBuffBusyIndex = 0; // index
// position of entry waiting to be delivered
DWORD dwDelBuffFreeIndex = 0; // index
// position of unused entry
#include "..\..\common\src\ReadRegistry.cpp"
/* FUNCTION: DllMain
* PURPOSE: This function is the entry point for the DLL. This implementation
is based on the fact that DLL_PROCESS_ATTACH is only
called from the inet service once.
* ARGUMENTS: HANDLE hModule
module handle
* ul_reason_for_call reason for call
LPVOID lpReserved
* RETURNS: BOOL FALSE
errors occurred in initialization
* TRUE
successfully initialized
*/
BOOL WINAPI DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID
lpReserved)
{
    DWORD i;
    char szEvent[LEN_ERR_STRING] = "\0";
    char szLogFile[128];
    char szDllName[128];

    // debugging...
    // DebugBreak();

    try
    {
        switch( ul_reason_for_call )
        {
            case DLL_PROCESS_ATTACH:
                {
                    DWORD dwSize
                    = MAX_COMPUTERNAME_LENGTH+1;

                    GetComputerName(szMyComputerName, &dwSize);
                    szMyComputerName[dwSize] = 0;

                    DisableThreadLibraryCalls((HMODULE)hModule);
                    InitializeCriticalSection(&TermCriticalSection);

                    if
                    ( ReadTPCCRegistrySettings( &Reg ) )
                    throw new
                    CWEBCLNT_ERR( ERR_MISSING_REGISTRY_ENTRIES );

                    dwDelBuffSize =
                    min( Reg.dwMaxPendingDeliveries, 10000 ); // min with 10000 as a sanity
                    constraint
                    dwNumDeliveryThreads =
                    min( Reg.dwNumberOfDeliveryThreads, 100 ); // min with 100 as a sanity
                    constraint

                    TermInit();
                    // load DLL for txn
                    monitor
                    if (Reg.eTxnMon == TUXEDO)
                    {
                        strcpy( szDllName, Reg.szPath );
                        strcat( szDllName, "tpcc_tuxedo.dll" );
                        hLibInstanceTm = LoadLibrary( szDllName );
                        if
                        (hLibInstanceTm == NULL)
                        throw new CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName,
                        GetLastError() );

                        function pointer to wrapper for class constructor // get
                    }
                }
            }
        }
    }
}

```

```

pCTPCC_TUXEDO_new = (TYPE_CTPCC_TUXEDO*)
GetProcAddress(hLibInstanceTm, "CTPCC_TUXEDO_new");
if
(pCTPCC_TUXEDO_new == NULL)
throw new CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
GetLastError() );
}
else if (Reg.eTxnMon ==
ENCINA)
{
    strcpy( szDllName, Reg.szPath );
    strcat( szDllName, "tpcc_encina.dll" );
    hLibInstanceTm = LoadLibrary( szDllName );
    if
    (hLibInstanceTm == NULL)
    throw new CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName,
    GetLastError() );
    function pointer to wrapper for class constructor // get
    pCTPCC_ENCINA_new = (TYPE_CTPCC_ENCINA*)
    GetProcAddress(hLibInstanceTm, "CTPCC_ENCINA_new");
    pCTPCC_ENCINA_post_init = (TYPE_CTPCC_ENCINA*)
    GetProcAddress(hLibInstanceTm, "CTPCC_ENCINA_post_init");
    if
    (pCTPCC_ENCINA_new == NULL)
    throw new CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
    GetLastError() );
    }
    else if (Reg.eTxnMon ==
COM)
    {
        strcpy( szDllName, Reg.szPath );
        strcat( szDllName, "tpcc_com.dll" );
        hLibInstanceTm = LoadLibrary( szDllName );
        if
        (hLibInstanceTm == NULL)
        throw new CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName,
        GetLastError() );
        function pointer to wrapper for class constructor // get
        pCTPCC_COM_new = (TYPE_CTPCC_COM*)
        GetProcAddress(hLibInstanceTm, "CTPCC_COM_new");
        if
        (pCTPCC_COM_new == NULL)
        throw new CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
        GetLastError() );
        }
        // load DLL for database
        // if ((Reg.eTxnMon == None)
        || (dwNumDeliveryThreads > 0))
        {
            if
            (Reg.eDB_Protocol == DBLIB)
            {
                strcpy( szDllName, Reg.szPath );
                strcat( szDllName, "tpcc_dblib.dll" );
                hLibInstanceDb = LoadLibrary( szDllName );
                if (hLibInstanceDb == NULL)
                throw new CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName,
                GetLastError() );

                // get function pointer to wrapper for class constructor
                pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
                GetProcAddress(hLibInstanceDb, "CTPCC_DBLIB_new");
                if (pCTPCC_DBLIB_new == NULL)
                throw new CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
                GetLastError() );
                }
            else if
            (Reg.eDB_Protocol == ODBC)
            {
                strcpy( szDllName, Reg.szPath );
                strcat( szDllName, "tpcc_odbc.dll" );
                hLibInstanceDb = LoadLibrary( szDllName );
                if (hLibInstanceDb == NULL)
                throw new CWEBCLNT_ERR( ERR_LOADDLL_FAILED, szDllName,
                GetLastError() );

                // get function pointer to wrapper for class constructor
            }
        }
    }
}

```

```

pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
if
(pCTPCC_ODBC_new == NULL)
throw new CWEBCLNT_ERR( ERR_GETPROCADDR_FAILED, szDllName,
GetLastError() );
}
}
if (dwNumDeliveryThreads)
{
    // for
    deferred delivery txns:
    hDoneEvent =
    CreateEvent( NULL, TRUE /* manual reset */, FALSE /* initially not signalled */,
    NULL );
    InitializeCriticalSection(&delBuffCriticalSection);
    hWorkerSemaphore = CreateSemaphore( NULL, 0, dwDelBuffSize,
    NULL );
    dwDelBuffFreeCount = dwDelBuffSize;
    InitJulianTime(NULL);
    // create
    unique log file name based on delilog-yymmdd-hhmm.log
    SYSTEMTIME
    Time;
    GetLocalTime( &Time );
    wsprintf( szLogFile, "%sdelivery-%2.2d-%2.2d-%2.2d.log",
    Reg.szPath, Time.wYear % 100, Time.wMonth, Time.wDay,
    Time.wMinute );
    txndelilog =
    new CTxnLog(szLogFile, TXN_LOG_WRITE);
    //write event
    into txn log for START
    txndelilog->writeCtrlRectoLog(TXN_EVENT_START, szMyComputerName, sizeof(szMyComputerName));
    // allocate
    structures for delivery buffers and thread mgmt
    pDelihandles
    = new HANDLE[dwNumDeliveryThreads];
    pDelibuff =
    new DELIVERY_TRANSACTION[dwDelBuffSize];
    // launch
    deliveryworkerThread to perform actual delivery txns
    for(i=0;
    i<dwNumDeliveryThreads; i++)
    {
        pDelihandles[i] = (HANDLE) _beginthread( DeliveryworkerThread, 0,
        NULL );
        if (pDelihandles[i] == INVALID_HANDLE_VALUE)
        throw new CWEBCLNT_ERR( ERR_DELIVERY_THREAD_FAILED );
        }
        case DLL_PROCESS_DETACH:
        {
            if
            (txndelilog != NULL)
            //write event into txn log for STOP
            txndelilog->writeCtrlRectoLog(TXN_EVENT_STOP, szMyComputerName,
            sizeof(szMyComputerName));

            // This will do a clean shutdown of the delivery log file
            CTxnLog *txndelilogLocal = txndelilog;
            txndelilog = NULL;
            delete txndelilogLocal;
            }
        delete []
        pDelihandles;
        delete []
        pDelibuff;

        CloseHandle( hWorkerSemaphore );
        CloseHandle( hDoneEvent );
        DeleteCriticalSection(&delBuffCriticalSection);
        DeleteCriticalSection(&TermCriticalSection);
        if (hLibInstanceTm !=
        NULL)
    }
}

```

```

FreeLibrary( hLibInstanceTm );
NULL)
FreeLibrary( hLibInstanceDb );

hLibInstanceTm = NULL;
if (hLibInstanceDb !=
hLibInstanceDb = NULL;
sleep(500);
break;

default: /* nothing */;
}
}
catch (CBaseErr *e)
{
writeMessageToEventLog( e->ErrorText() );
delete e;
TerminateExtension(0);
return FALSE;
}
catch (...)
{
writeMessageToEventLog(TEXT("Unhandled exception.
DLL could not load."));
TerminateExtension(0);
return FALSE;
}
return TRUE;
}

/* FUNCTION: GetExtensionVersion
* PURPOSE: This function is called by the inet service when the DLL is first
loaded.
* ARGUMENTS: HSE_VERSION_INFO *pVer passed in structure in
which to place expected version number.
* RETURNS: TRUE inet service expected return value.
*/
BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO *pVer)
{
pVer->dwExtensionVersion = MAKELONG(HSE_VERSION_MINOR,
HSE_VERSION_MAJOR);
lstrcpy(pVer->pszExtensionDesc, "TPC-C Server.",
HSE_MAX_EXT_DLL_NAME_LEN);

// TODO: why do we need this here instead of in the DLL attach?
if (Reg_ExtNMon == ENCINA)
pTPCC_ENCINA_post_init();

return TRUE;
}

/* FUNCTION: TerminateExtension
* PURPOSE: This function is called by the inet service when the DLL is about
to be unloaded. Release all resources in anticipation of
being unloaded.
* RETURNS: TRUE inet service expected return value.
*/
BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
if (pDelihandles)
{
SetEvent( hDoneEvent );
for(DWORD i=0; i<dwNumDeliveryThreads; i++)
waitForSingleObject( pDelihandles[i],
INFINITE );
}
TermDeleteAll();
return TRUE;
}

/* FUNCTION: HttpExtensionProc
* PURPOSE: This function is the main entry point for the TPCC DLL. The
internet service calls this function passing in the http
string.
* ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB structure pointer to
passed in internet
* service information.
* RETURNS: DWORD HSE_STATUS_SUCCESS
connection can be dropped if error
HSE_STATUS_SUCCESS_AND_KEEP_CONN keep connect valid comment
* COMMENTS: None
*/
DWORD WINAPI HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
iSyncId; int iCmd, FormId, TermId,

```

```

char szBuffer[4096];
int szHeader[] = "200 OK"; 1pbSize;
static char szHeader[] = "200 OK"; 1pbSize;
DWORD dwSize = 6; // initial
value is strlen(szHeader)
char szHeader1[4096];

#ifdef ICECAP
StartCAP();
#endif

try
{
//process http query
ProcessQueryString(pECB, &iCmd, &FormId, &TermId,
&iSyncId);

if (TermId != 0)
{
if (TermId < 0 || TermId >=
Term.iNumEntries || Term.pClientData[TermId].iNextFree != -1)
{
// debugging...
char szTmp[128];
wsprintf( szTmp, "Invalid
term ID; TermId = %d", TermId );
writeMessageToEventLog( szTmp );
throw new
CWEBCLNT_ERR( ERR_INVALID_TERMID );
}
//must have a valid syncid here since
termid is valid
if (iSyncId !=
Term.pClientData[TermId].iSyncId)
throw new
CWEBCLNT_ERR( ERR_INVALID_SYNC_CONNECTION );
//set use time
Term.pClientData[TermId].iTickCount =
GetTickCount();
}

switch(iCmd)
{
case 0:
welcomeForm(pECB, szBuffer);
break;
case 1:
switch( FormId )
{
case WELCOME_FORM:
case MAIN_MENU_FORM:
break;
case NEW_ORDER_FORM:
ProcessNewOrderForm(pECB, TermId, szBuffer); break;
case PAYMENT_FORM:
ProcessPaymentForm(pECB, TermId, szBuffer); break;
case DELIVERY_FORM:
ProcessDeliveryForm(pECB, TermId, szBuffer); break;
case ORDER_STATUS_FORM:
ProcessOrderStatusForm(pECB, TermId, szBuffer); break;
case STOCK_LEVEL_FORM:
ProcessStockLevelForm(pECB, TermId, szBuffer); break;
}
break;
case 2:
// new-order selected from menu; display
new-order input form
INPUT_FORM, szBuffer);
MakeNewOrderForm(TermId, NULL,
break;
case 3:
// payment selected from menu; display
payment input form
MakePaymentForm(TermId, NULL, INPUT_FORM,
szBuffer);
break;
case 4:
// delivery selected from menu; display
delivery input form
MakeDeliveryForm(TermId, NULL,
INPUT_FORM, szBuffer);
break;
case 5:
// order-status selected from menu;
display order-status input form
MakeOrderStatusForm(TermId, NULL,
INPUT_FORM, szBuffer);
break;
case 6:
// stock-level selected from menu;
display stock-level input form
MakeStockLevelForm(TermId, NULL,
INPUT_FORM, szBuffer);
break;
case 7:

```

```

// ExitCmd
TermDelete(TermId);
WelcomeForm(pECB, szBuffer);
break;
case 8:
SubmitCmd(pECB, szBuffer);
break;
case 9:
// menu
MakeMainMenuForm(TermId,
Term.pClientData[TermId].iSyncId, szBuffer);
break;
case 10:
// CMD=Clear
// resets all connections; should only
be used when no other connections are active
TermDeleteAll();
TermInit();
WelcomeForm(pECB, szBuffer);
break;
case 11:
// CMD=Stats
StatsCmd(pECB, szBuffer);
break;
}
}
catch (CBaseErr *e)
{
ErrorForm( pECB, e->ErrorType(), e->ErrorNum(),
TermId, iSyncId, e->ErrorText(), szBuffer );
delete e;
}
catch (...)
{
ErrorForm( pECB, ERR_TYPE_WEBDLL, 0, TermId, iSyncId,
"Error: Unhandled exception in web client.", szBuffer );
}
#ifdef ICECAP
StopCAP();
#endif

1pbSize = strlen(szBuffer);
wsprintf(szHeader1,
"Content-Type: text/html\r\n"
"Content-Length: %d\r\n"
"Connection: Keep-Alive\r\n\r\n",
1pbSize);
strcat( szHeader1, szBuffer );
(*pECB->ServerSupportFunction)(pECB->ConnID,
HSE_REQ_SEND_RESPONSE_HEADER, szHeader, (LPDWORD) &dwSize, (LPDWORD)szHeader1);

//finish up and keep connection
pECB->dwHttpStatusCode = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

void writeMessageToEventLog(LPTSTR lpszMsg)
{
TCHAR szMsg[256];
HANDLE hEventSource;
LPTSTR lpszStrings[2];

// Use event logging to log the error.
hEventSource = RegisterEventSource(NULL, TEXT("TPCC.DLL"));
_lprintf(szMsg, TEXT("Error in TPCC.DLL: "));
lpszStrings[0] = szMsg;
lpszStrings[1] = lpszMsg;
if (hEventSource != NULL)
{
ReportEvent(hEventSource, // handle of event source
EVENTLOG_ERROR_TYPE, // event type
0, // event category
0, // event ID
NULL, // current user's SID
2, // strings in lpszStrings
0, // no bytes of raw data
0, // array of error strings
(LPCTSTR *)lpszStrings, // no raw data
NULL);
(VOID) DeregisterEventSource(hEventSource);
}
}

/* FUNCTION: DeliveryworkerThread
* PURPOSE: This function processes deferred delivery txns. There are
typically several threads running this routine. The
number of threads is determined by an entry
read from the registry. The thread
waits for work by waiting on semaphore. When a delivery txn is posted, the
semaphore is released. After processing
the delivery txn, information is logged
to record the txn status and execution
time.
*/
/*static*/ void DeliveryworkerThread(void *ptr)
{
CTPCC_BASE *pTxn = NULL;
DELIVERY_TRANSACTION delivery;
PDELIVERY_DATA pDeliveryData;

```

```

TXN_RECORDER_TPCC_DELIV_DEF txnDelivRec;
DWORD
index;
HANDLE
handles[2];
SYSTEMTIME trans_end; //delivery
finished time SYSTEMTIME
start time SYSTEMTIME trans_start; //delivery transaction

assert(txnDelivLog != NULL);
try
{
    if (Reg.eDB_Protocol == ODBC)
    {
        pTxn = pCTPCC_ODBC_new(Reg.szDbServer,
        Reg.szDbUser, Reg.szDbPassword, szMComputerName, Reg.szDbName);
    }
    else if (Reg.eDB_Protocol == DBLIB)
    {
        pTxn = pCTPCC_DBLIB_new(Reg.szDbServer,
        Reg.szDbUser, Reg.szDbPassword, szMComputerName, Reg.szDbName);
    }
    pDeliveryData = pTxn->BuffAddr_Delivery();
}
catch (CBaseErr *e)
{
    char szTmp[1024];
    sprintf(szTmp, "Error in Delivery Txn thread.
    Could not connect to database. "
    Password=%s, database=%s", "%s. Server=%s, User=%s,
    Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword, Reg.szDbName);
    WriteMessageToEventLog(szTmp);
    delete e;
    goto ErrorExit;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled exception
    caught in DeliveryworkerThread."));
    goto ErrorExit;
}
while (TRUE)
{
    try
    {
        //while delivery thread running, i.e.
        while (TRUE)
        {
            // need to wait for
            multiple objects: program exit or worker semaphore;
            handles[0] = hDoneEvent;
            handles[1] =
            hWorkerSemaphore;
            WaitForMultipleObjects(2, &handles[0], FALSE, INFINITE);
            index =
            WAIT_OBJECT_0
            ErrorExit;
            goto
            ZeroMemory(&txnDelivRec,
            sizeof(txnDelivRec));
            TXN_REC_TYPE_TPCC_DELIV_DEF;
            txnDelivRec.TxnType =
            // make a local copy of
            current entry from delivery buffer and increment buffer index
            EnterCriticalSection(&DelBuffCriticalSection);
            delivery =
            *(pDelBuff+dwDelBuffBusyIndex);
            dwDelBuffFreeCount++;
            dwDelBuffBusyIndex++;
            if (dwDelBuffBusyIndex ==
            dwDelBuffSize)
            // wrap-around if at end of buffer
            dwDelBuffBusyIndex = 0;
            LeaveCriticalSection(&DelBuffCriticalSection);
            pDeliveryData->w_id =
            pDeliveryData->
            >o_carrier_id = delivery.o_carrier_id;
            pDeliveryData->w_id;
            txnDelivRec.w_id =
            pDeliveryData->o_carrier_id;
            txnDelivRec.o_carrier_id =
            txnDelivRec.TxnStartT0 =
            Get64BitTime(&delivery.queue);
            pTxn->Delivery();
            GetLocalTime(&trans_start);
            pTxn->Delivery();
            GetLocalTime(&trans_end);
            //log txn
            txnDelivRec.TxnStatus =
            ERR_SUCCESS;
            for (int i=0; i<10; i++)
            txnDelivRec.o_id[i] = pDeliveryData->o_id[i];
            txnDelivRec.DeltaT4 =
            (int)(Get64BitTime(&trans_end) - txnDelivRec.TxnStartT0);
            txnDelivRec.DeltaTxnExec =

```

```

(int)(Get64BitTime(&trans_end) - Get64BitTime(&trans_start));
if (txnDelivLog != NULL)
    txnDelivLog->
    writeToLog(&txnDelivRec);
}
catch (CBaseErr *e)
{
}
}
char szTmp[1024];
sprintf(szTmp, "Error in Delivery Txn
thread. %s", e->ErrorText());
WriteMessageToEventLog(szTmp);
// log the error txn
txnDelivRec.TxnStatus = e->ErrorType();
if (txnDelivLog != NULL)
    txnDelivLog->
    writeToLog(&txnDelivRec);
}
delete e;
}
catch (...)
{
}
// unhandled exception; shouldn't
happen; not much we can do...
WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryworkerThread."));
}
ErrorExit:
delete pTxn;
_endthread();
}
/* FUNCTION: PostDeliveryInfo
* PURPOSE: This function enters the delivery txn into the deferred delivery
buffer.
* RETURNS:
posted successfully BOOL FALSE delivery information
*/
TRUE error cannot post delivery info
BOOL PostDeliveryInfo(short w_id, short o_carrier_id)
{
    BOOL bError;
    EnterCriticalSection(&DelBuffCriticalSection);
    if (dwDelBuffFreeCount > 0)
    {
        bError = FALSE;
        (pDelBuff+dwDelBuffFreeIndex)->w_id
        = w_id;
        (pDelBuff+dwDelBuffFreeIndex)->o_carrier_id
        = o_carrier_id;
        GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)->queue);
        dwDelBuffFreeCount--;
        dwDelBuffFreeIndex++;
        if (dwDelBuffFreeIndex == dwDelBuffSize)
            dwDelBuffFreeIndex = 0;
        // wrap-around if at end of buffer
    }
    else
        // No free buffers. Return an error, which indicates
        that the delivery buffer is full
        // Most likely, the number of delivery worker threads
        needs to be increased to keep up
        // with the txn rate.
        bError = TRUE;
    LeaveCriticalSection(&DelBuffCriticalSection);
    if (bError)
        // increment worker semaphore to wake up a worker
        thread
        ReleaseSemaphore(&hWorkerSemaphore, 1, NULL);
    return bError;
}
/* FUNCTION: ProcessQueryString
* PURPOSE: This function extracts the relevant information out of the http
command passed in from the browser.
* COMMENTS: If this is the initial connection i.e. client is at welcome screen
then there will not be a terminal id or current form id. If this is the case then the pTermid and
pFormid return values are undefined.
*/
void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int *pCmd, int *pFormId,
int *pTermId, int *pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;
    //allowable client command strings i.e. CMD=command
    static char *szCmds[] =
    {
        "Process", ".NewOrder..", ".Payment..",
        ".Delivery..", ".Order-Status..", ".Stock-Level..",
        ".Exit..", "Submit", "Menu", "Clear", "Stats", ""
    };
}

```

```

screen *pCmd = 0; // default is the login
*TermId = 0;
screen // if no params (i.e., empty query string), then return login
if (strlen(pECB->lpszQueryString) == 0)
    return;
// parse FORMID, TERMID, and SYNCID
*pFormId = GetIntKeyValue(&ptr, "FORMID", NO_ERR, NO_ERR);
*pTermId = GetIntKeyValue(&ptr, "TERMID", NO_ERR, NO_ERR);
*pSyncId = GetIntKeyValue(&ptr, "SYNCID", NO_ERR, NO_ERR);
// parse CMD
GetKeyValue(&ptr, "CMD", szBuffer, sizeof(szBuffer),
ERR_COMMAND_UNDEFINED);
// see which command it matches
for(i=0; i++)
{
    if (szCmds[i][0] == 0)
        // no more; no match; return error
        throw new
        GWEBCLNT_ERR( ERR_COMMAND_UNDEFINED );
    if (!strcmp(szCmds[i], szBuffer))
    {
        *pCmd = i+1;
        break;
    }
}
}
/* FUNCTION: void welcomeForm
*/
void welcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    char szTmp[1024];
    //welcome to tpc-c html form buffer, this is first form client
    sees.
    strcpy(szBuffer, "<HTML><HEAD><TITLE>TPC-C Web
    Client</TITLE></HEAD><BODY>"
    "<B><BIG>Microsoft TPC-C Web Client (ver 4.20)</BIG></B> <BR>"
    "<font face=\"Courier New\"><PRE>"
    "Compiled: \"__DATE__\", \"__TIME__\" <BR>"
    "Source: \"__FILE__\" (\"__TIMESTAMP__\") <BR>"
    "</PRE></font>"
    "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
    "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">"
    "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"
    "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"1\">"
    "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"0\">"
    "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"0\">"
    "<INPUT TYPE=\"hidden\" NAME=\"VERSION\" VALUE=\"\">"
    WEBCIENT_VERSION ">"
    );
    sprintf(szTmp, "Configuration Settings: <BR><font
    face=\"Courier New\" color=\"blue\"><PRE>"
    "Txn Monitor
    Database
    = <B>%s</B><BR>"
    "Max
    Connections = <B>%d</B><BR>"
    "Max
    Delivery Threads = <B>%d</B><BR>"
    "Max Pending
    Deliveries = <B>%d</B><BR>"
    , szTxnMonNames[Reg.eTxnMon],
    szDBNames[Reg.eDB_Protocol], Reg.dwMaxConnections,
    dwNumDeliveryThreads, dwDelBuffSize);
    strcat(szBuffer, szTmp);
    if (Reg.eTxnMon == COM)
    {
        sprintf(szTmp, "COM Single Pool =
        Reg.bCOM_SinglePool ? \"YES\" : \"NO\" );
        strcat(szBuffer, szTmp);
    }
    strcat(szBuffer, "</PRE></font>");
    if (Reg.eTxnMon == None)
        // connection options may be specified when not using
        a txn monitor
        sprintf(szTmp, "Please enter your
        database options for this connection:<BR>"
        "<font face=\"Courier New\" color=\"blue\"><PRE>"
        "DB Server = <INPUT NAME=\"db_server\" SIZE=20
        VALUE=\"%s\"><BR>"

```

```

"DB User ID = <INPUT NAME="db_user" SIZE=20 VALUE="%s"><BR>"
VALUE="%s"><BR>"
"DB Password = <INPUT NAME="db_passwd" SIZE=20
VALUE="%s"><BR>"
"DB Name = <INPUT NAME="db_name" SIZE=20 VALUE="%s"><BR>"
"</PRE></font>"
Reg.szDbUser, Reg.szDbPassword, Reg.szDbName );
else
    // if using a txn monitor, connection options are
    // determined from registry; can't
    // set per user. show options fyi
    sprintf( szTmp, "Database options which
    will be used by the transaction monitor:<BR>"
    "<font face="Courier New" color="blue"><PRE>"
    "DB Server = <B>%s</B><BR>"
    "DB User ID = <B>%s</B><BR>"
    "DB Password = <B>%s</B><BR>"
    "DB Name = <B>%s</B><BR>"
    "</PRE></font>"
    Reg.szDbUser, Reg.szDbPassword, Reg.szDbName );
    strcat( szBuffer, szTmp);
District for sprintf( szTmp, "Please enter your warehouse and
this session:<BR>" " <font
face="Courier New" color="blue"><PRE> );
strcat( szBuffer, szTmp);
strcat( szBuffer, "warehouse ID = <INPUT NAME="w_id"
SIZE=4><BR>"
"District ID = <INPUT NAME="d_id" SIZE=2><BR>"
"</PRE></font><HR>"
"<INPUT TYPE="submit" NAME="CMD" VALUE="Submit">"
"</FORM></BODY></HTML>");
}
/* FUNCTION: SubmitCmd
* PURPOSE: This function allocated a new terminal id in the Term structure
array.
*/
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int iNewTerm;
    char *ptr = pECB->pszQueryString;
    char szVersion[32] = { 0 };
    char szServer[32] = { 0 };
    char szUser[32] = "sa";
    char szPassword[32] = { 0 };
    char szDatabase[32] = "tpcc";
    // validate version field; the version field ensures that the RTE
    is synchronized with the web client
    GetKeyValue(&ptr, "VERSION", szVersion, sizeof(szVersion),
    ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCLNT_ERR( ERR_VERSION_MISMATCH );
    if ( Reg.eTxnMon == None )
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server", szServer,
        sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse user name
        GetKeyValue(&ptr, "db_user", szUser, sizeof(szUser),
        NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd", szPassword,
        sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name", szDatabase,
        sizeof(szDatabase), NO_ERR);
    }
    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id", ERR_HTML_ILL_FORMED,
    ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCLNT_ERR( ERR_W_ID_INVALID );
    // parse district ID
    int d_id = GetIntKeyValue(&ptr, "d_id", ERR_HTML_ILL_FORMED,
    ERR_D_ID_INVALID);
    if ( d_id < 1 || d_id > 10 )
        throw new CWEBCLNT_ERR( ERR_D_ID_INVALID );
    iNewTerm = TermAdd();
    Term.pClientData[iNewTerm].w_id = w_id;
    Term.pClientData[iNewTerm].d_id = d_id;
    try
    {
        if ( Reg.eTxnMon == TUXEDO )
            Term.pClientData[iNewTerm].pTxn =

```

```

pCTPCC_TUXEDO_new();
    else if ( Reg.eTxnMon == ENCINA )
        Term.pClientData[iNewTerm].pTxn =
        pCTPCC_ENCINA_new();
    else if ( Reg.eTxnMon == COM )
        Term.pClientData[iNewTerm].pTxn =
        pCTPCC_COM_new( Reg.bCOM_SinglePool );
    else if ( Reg.eDB_Protocol == ODBC )
        Term.pClientData[iNewTerm].pTxn =
        pCTPCC_ODBC_new( szServer, szUser, szPassword, szMyComputerName, szDatabase );
    else if ( Reg.eDB_Protocol == DBLIB )
        Term.pClientData[iNewTerm].pTxn =
        pCTPCC_DBLIB_new( szServer, szUser, szPassword, szMyComputerName, szDatabase );
    }
    catch (...)
    {
        TermDelete(iNewTerm);
        // pass exception upward
        throw;
    }
    MakeMainMenuForm(iNewTerm, Term.pClientData[iNewTerm].iSyncId,
    szBuffer);
/* FUNCTION: StatsCmd
* PURPOSE: This function returns to the browser the total number of active
terminal ids. This routine is for
development/debugging purposes.
*/
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int i;
    int iTotals;
    EnterCriticalSection(&TermCriticalSection);
    iTotals = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree == -1)
            iTotals++;
    }
    LeaveCriticalSection(&TermCriticalSection);
    wsprintf( szBuffer,
    "%HTML<HEAD><TITLE>TPC-C Web Client
    </HEAD>" " <BODY><B><BIG> Total Active
    Connections: %d </BIG></B><BR></BODY></HTML>"
    , iTotals );
    char *CWEBCLNT_ERR::ErrorText()
    {
        static SERRORMSG errorMsgs[] =
        {
            { ERR_COMMAND_UNDEFINED,
            "Command undefined." },
            { ERR_D_ID_INVALID,
            "Invalid District ID Must
            be 1 to 10." },
            { ERR_DELIVERY_CARRIER_ID_RANGE,
            "Delivery Carrier ID out of range must be 1 - 10." },
            { ERR_DELIVERY_CARRIER_INVALID,
            "Delivery Carrier ID invalid must be numeric 1 - 10." },
            { ERR_DELIVERY_MISSING_OCD_KEY,
            "Delivery missing Carrier ID key \"OCD\"." },
            { ERR_DELIVERY_THREAD_FAILED,
            "Could not start delivery worker
            thread." },
            { ERR_GETPROCADDR_FAILED,
            "Could not map proc in DLL. GetProcAddr
            error. DLL="
            string." },
            { ERR_HTML_ILL_FORMED,
            "Required key field is missing from HTML
            string." },
            { ERR_INVALID_SYNC_CONNECTION,
            "Invalid Terminal Sync ID." },
            { ERR_INVALID_TERMINID,
            "Invalid Terminal ID." }
        }
    }
}

```

```

},
{
    ERR_LOADDLL_FAILED,
    "Load of DLL failed.
    DLL="
},
{
    ERR_MAX_CONNECTIONS_EXCEEDED,
    "No connections available. Max Connections is
    probably too low." },
{
    ERR_MISSING_REGISTRY_ENTRIES,
    "Required registry entries are missing. Rerun
    INSTALL to correct."
},
{
    ERR_NEWORDER_CUSTOMER_INVALID,
    "New Order customer id invalid data type, range = 1
    to 3000."
},
{
    ERR_NEWORDER_CUSTOMER_KEY_INVALID,
    "New Order missing customer key \"CID\"."
},
{
    ERR_NEWORDER_DISTRICT_INVALID,
    "New Order District ID Invalid range 1 - 10."
},
{
    ERR_NEWORDER_FORM_MISSING_DID,
    "New Order missing District key \"DID\"."
},
{
    ERR_NEWORDER_ITEMID_INVALID,
    "New Order Item Id is wrong data type, must be
    numeric."
},
{
    ERR_NEWORDER_ITEMID_RANGE,
    "New Order Item ID is out of range. Range = 1 to
    999999."
},
{
    ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
    "New Order Item_Id field entered without a corresponding Supp_w."
},
{
    ERR_NEWORDER_MISSING_ITEMID_KEY,
    "New Order missing Item Id key \"IID\"."
},
{
    ERR_NEWORDER_MISSING_QTY_KEY,
    "New Order Missing Qty key \"Qty#\"."
},
{
    ERR_NEWORDER_MISSING_SUPPW_KEY,
    "New Order missing Supp_w key \"SP#\"."
},
{
    ERR_NEWORDER_NOITEMS_ENTERED,
    "New Order No order lines entered."
},
{
    ERR_NEWORDER_QTY_INVALID,
    "New Order Qty invalid must be numeric range 1 - 99."
},
{
    ERR_NEWORDER_QTY_RANGE,
    "New Order Qty is out of range. Range =
    1 to 99."
},
{
    ERR_NEWORDER_QTY_WITHOUT_SUPPW,
    "New Order Qty field entered without a corresponding
    Supp_w."
},
{
    ERR_NEWORDER_SUPPW_INVALID,
    "New Order Supp_w invalid data type must
    be numeric."
},
{
    ERR_NO_SERVER_SPECIFIED,
    "No Server name specified."
},
{
    ERR_ORDERSTATUS_CID_AND_CLT,
    "Order Status Only Customer ID or Last Name may be
    entered, not both."
},
{
    ERR_ORDERSTATUS_CID_INVALID,
    "Order Status Customer ID invalid, range must be
    numeric 1 - 3000."
},
{
    ERR_ORDERSTATUS_CLT_RANGE,
    "Order Status Customer last name longer than 16
    characters."
},
{
    ERR_ORDERSTATUS_DID_INVALID,
    "Order Status District invalid, value must be numeric

```

```

1 - 10."
},
{
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    "Order Status Either Customer ID or Last Name must be entered."
},
{
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    "Order Status missing Customer key \"CID*\"."
},
{
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    "Order Status missing Customer Last Name key \"CLT*\"."
},
{
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    "Order Status missing District key \"DID*\"."
},
{
    ERR_PAYMENT_CDI_INVALID,
    "Payment Customer district invalid must be numeric."
},
{
    ERR_PAYMENT_CID_AND_CLT,
    "Payment Only Customer ID or Last Name may be entered,
not
both."
},
{
    ERR_PAYMENT_CUSTOMER_INVALID,
    "Payment Customer data type invalid, must be
numeric."
},
{
    ERR_PAYMENT_CWI_INVALID,
    "Payment Customer warehouse invalid, must be
numeric."
},
{
    ERR_PAYMENT_DISTRICT_INVALID,
    "Payment District ID is invalid, must be 1 - 10."
},
{
    ERR_PAYMENT_HAM_INVALID,
    "Payment Amount invalid data type must be numeric."
},
{
    ERR_PAYMENT_HAM_RANGE,
    "Payment Amount out of range, 0 -
9999.99."
},
{
    ERR_PAYMENT_LAST_NAME_TO_LONG,
    "Payment Customer last name longer than 16
characters."
},
{
    ERR_PAYMENT_MISSING_CDI_KEY,
    "Payment missing Customer district key \"CDI*\"."
},
{
    ERR_PAYMENT_MISSING_CID_CLT,
    "Payment Either Customer ID or Last Name must be
entered."
},
{
    ERR_PAYMENT_MISSING_CID_KEY,
    "Payment missing Customer key \"CID*\"."
},
{
    ERR_PAYMENT_MISSING_CLT_KEY,
    "Payment missing Customer Last Name key \"CLT*\"."
},
{
    ERR_PAYMENT_MISSING_CWI_KEY,
    "Payment missing Customer warehouse key \"CWI*\"."
},
{
    ERR_PAYMENT_MISSING_DID_KEY,
    "Payment missing District key \"DID*\"."
},
{
    ERR_PAYMENT_MISSING_HAM_KEY,
    "Payment missing Amount key \"HAM*\"."
},
{
    ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
    "Stock Level; missing Threshold key \"TT*\"."
},
{
    ERR_STOCKLEVEL_THRESHOLD_INVALID,
    "Stock Level; Threshold value must be in the range = 1 - 99."
},
},
{
    ERR_STOCKLEVEL_THRESHOLD_RANGE,
    "Stock Level Threshold out of range, range must be 1
- 99."
}

```

```

},
{
    ERR_VERSION_MISMATCH,
    "Invalid version field. RTE and web
Client are probably out of
sync."
},
{
    ERR_W_ID_INVALID,
    "Invalid warehouse ID."
},
},
{
    0,
    ""
};
};
char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown error
number." );
        break;
    }
    if (m_Error == errorMsgs[i].iError)
    {
        strcpy( szTmp, errorMsgs[i].szMsg );
        break;
    }
    i++;
}
if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    sprintf( szTmp+strlen(szTmp), " Error=%d",
m_SystemErr );
m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}
/* FUNCTION: GetValue
*
* PURPOSE: This function parses a http formatted string for specific key
values.
*
* ARGUMENTS: char *pQueryStringhttp string
from client browser
*
* *pkey
char
key value to look for
*
* NoKeyErr
error value to throw if key not found
*
* NotIntErr
error value to throw if value not
numeric
*
* RETURNS: integer
*
* ERROR: if (the pkey value is not found) then if
(NoKeyErr != NO_ERR)
*
* throw CWBCLNT_ERR(err)
*
* return 0
*
* found) then else if (non-numeric char
(NotIntErr != NO_ERR) then if
*
* throw CWBCLNT_ERR(err)
*
* return 0
*
* COMMENTS: http keys are formatted either KEY=value& or KEY=value\0. This DLL
formats
*
* a manner that the keys can be extracted in the TPC-C input fields in such
above manner.
*/
int GetIntKeyValue(char *pQueryString, char *pkey, WEBERROR NoKeyErr, WEBERROR
NotIntErr)
{
    char *ptr0;
    char *ptr;
    if ( ! (ptr=strstr(pQueryString, pkey)) )
        goto ErrorNoKey;
    ptr += strlen(pkey);
    if ( *ptr != '=' )
        ptr++;
        goto ErrorNoKey;
    ptr0 = ptr;
    // remember starting point
    // scan string until a terminator (null or &) or a non-digit
    while( *ptr && *ptr != '&' && isdigit(*ptr) )
        ptr++;
    // make sure we stopped scanning for the right reason
    if ( (ptr0 == ptr) || (*ptr && *ptr != '&') )
    {
        if (NotIntErr != NO_ERR)
            throw new CWBCLNT_ERR( NoKeyErr );
        return 0;
    }
    *pQueryString = ptr;
    return atoi(ptr0);
}
ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWBCLNT_ERR( NoKeyErr );
    return 0;
}
/* FUNCTION: TermInit
*
* PURPOSE: This function initializes the client terminal structure; it is
called when the TPCC.DLL
*
* is first loaded by the inet service.
*
*/
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);
    Term.iMasterSyncId = 1;
    Term.iNumEntries = Reg.dwMaxConnections+1;
    Term.pClientData = NULL;
    Term.pClientData = (PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWBCLNT_ERR( ERR_MEM_ALLOC_FAILED );
    }
    ZeroMemory( Term.pClientData, Term.iNumEntries *
sizeof(CLIENTDATA) );
    Term.iFreeList = Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets set to -1, which marks
it as "in use".
}
void GetValue(char *pQueryString, char *pkey, char *pvalue, int iMax,
WEBERROR err)
{
    char *ptr;
    if ( ! (ptr=strstr(pQueryString, pkey)) )
        goto ErrorExit;
    ptr += strlen(pkey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;
    iMax--; // one position is for terminating null
    while( *ptr && *ptr != '&' && iMax )
    {
        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null
    *pQueryString = ptr;
    return;
}
ErrorExit:
    if (err != NO_ERR)

```

```

}
    *pValue = 0; // return empty result string
}
/* FUNCTION: GetIntKeyValue
*
* PURPOSE: This function parses a http formatted string for a specific key
value.
*
* ARGUMENTS: char *pQueryStringhttp string
from client browser
*
* *pkey
char
key value to look for
*
* NoKeyErr
error value to throw if key not found
*
* NotIntErr
error value to throw if value not
numeric
*
* RETURNS: integer
*
* ERROR: if (the pkey value is not found) then if
(NoKeyErr != NO_ERR)
*
* throw CWBCLNT_ERR(err)
*
* return 0
*
* found) then else if (non-numeric char
(NotIntErr != NO_ERR) then if
*
* throw CWBCLNT_ERR(err)
*
* return 0
*
* COMMENTS: http keys are formatted either KEY=value& or KEY=value\0. This DLL
formats
*
* a manner that the keys can be extracted in the TPC-C input fields in such
above manner.
*/
int GetIntKeyValue(char *pQueryString, char *pkey, WEBERROR NoKeyErr, WEBERROR
NotIntErr)
{
    char *ptr0;
    char *ptr;
    if ( ! (ptr=strstr(pQueryString, pkey)) )
        goto ErrorNoKey;
    ptr += strlen(pkey);
    if ( *ptr != '=' )
        ptr++;
        goto ErrorNoKey;
    ptr0 = ptr;
    // remember starting point
    // scan string until a terminator (null or &) or a non-digit
    while( *ptr && *ptr != '&' && isdigit(*ptr) )
        ptr++;
    // make sure we stopped scanning for the right reason
    if ( (ptr0 == ptr) || (*ptr && *ptr != '&') )
    {
        if (NotIntErr != NO_ERR)
            throw new CWBCLNT_ERR( NoKeyErr );
        return 0;
    }
    *pQueryString = ptr;
    return atoi(ptr0);
}
ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWBCLNT_ERR( NoKeyErr );
    return 0;
}
/* FUNCTION: TermInit
*
* PURPOSE: This function initializes the client terminal structure; it is
called when the TPCC.DLL
*
* is first loaded by the inet service.
*
*/
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);
    Term.iMasterSyncId = 1;
    Term.iNumEntries = Reg.dwMaxConnections+1;
    Term.pClientData = NULL;
    Term.pClientData = (PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWBCLNT_ERR( ERR_MEM_ALLOC_FAILED );
    }
    ZeroMemory( Term.pClientData, Term.iNumEntries *
sizeof(CLIENTDATA) );
    Term.iFreeList = Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets set to -1, which marks
it as "in use".
}

```



```

" <INPUT TYPE=\submit\ NAME=\CMD\ VALUE=\..Order-Status..\>"
" <INPUT TYPE=\submit\ NAME=\CMD\ VALUE=\..Stock-Level..\>"
" <INPUT TYPE=\submit\ NAME=\CMD\ VALUE=\..Exit..\>"
" </BODY></FORM></HTML>";
}
}

/* FUNCTION: MakeOrderStatusForm
* COMMENTS: The internal client buffer is created when the terminal id is
assigned and should not be freed except when the
client terminal id is no longer needed.
*/

void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA *pOrderStatusData, BOOL
bInput, char *szForm)
{
    int i, c;
    static char szBR[] = "\n";
    c = wsprintf(szForm,
    <HTML><HEAD><TITLE>TPC-C Order-
    Status</TITLE></HEAD><BODY>"
    " <FORM ACTION=\tpcc.d11\ METHOD=\GET\>"
    " <INPUT TYPE=\hidden\ NAME=\STATUSID\>"
    VALUE=\0\>"
    " <INPUT TYPE=\hidden\ NAME=\ERROR\ VALUE=\0\>"
    " <INPUT TYPE=\hidden\ NAME=\FORMID\>"
    VALUE=\%d\>"
    " <INPUT TYPE=\hidden\ NAME=\TERMID\>"
    " <INPUT TYPE=\hidden\ NAME=\SYNCID\>"
    " <PRE><font face=\Courier\>"
    " Warehouse: %4.4d "
    ORDER_STATUS_FORM, iTermId,
    Term.pClientData[iTermId].iSyncId, Term.pClientData[iTermId].w_id);
    if ( bInput )
    {
        strcpy(szForm+c,
        "District: <INPUT NAME=\DID*\>"
        "Customer: <INPUT NAME=\CID*\>" SIZE=4>"
        "CLT*\>" SIZE=23<BR>"
        "Cust-Balance:<BR><BR>"
        "Order-Number: Entry-Date:"
        "Supply-w Item-Id Qty Amount
        Delivery-Date<BR><BR><BR><BR>"
        " <BR><BR><BR><BR><BR><BR><BR>"
        " <HR><INPUT TYPE=\submit\ NAME=\CMD\>"
        NAME=\CMD\ VALUE=\Menu\>"
        " </BODY></FORM></HTML>");
    }
    else
    {
        c += wsprintf(szForm+c,
        "District: %2.2d<BR>"
        "Customer: %4.4d Name: %-16s %-2s %-
        16s<BR>",
        pOrderStatusData->c_id,
        pOrderStatusData->c_first,
        pOrderStatusData->c_middle, pOrderStatusData->c_last);
        c += sprintf(szForm+c, "Cust-Balance: %9.2f<BR>"
        " <BR>",
        pOrderStatusData->c_balance);
        c += wsprintf(szForm+c,
        "Order-Number: %8.8d Entry-
        Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d
        Carrier-Number: %2.2d<BR>"
        "Supply-w Item-Id Qty Amount
        Delivery-Date<BR>",
        pOrderStatusData->o_id,
        pOrderStatusData->o_entry_d_day,
        pOrderStatusData->o_entry_d_month,
        pOrderStatusData->o_entry_d_year,
        pOrderStatusData->o_entry_d_hour,
        pOrderStatusData->o_entry_d_minute,
        pOrderStatusData->o_entry_d_second,
        pOrderStatusData->o_carrier_id);
        for(i=0; i< pOrderStatusData->o_o_cnt; i++)
        {
            c += sprintf(szForm+c,
            "%4.4d %6.6d %2.2d %9.2f %2.2d-%2.2d-%4.4d<BR>",
            pOrderStatusData-
            >oL[i].oL_supply_w_id,
            pOrderStatusData-
            >oL[i].oL_i_id,
            pOrderStatusData-
            >oL[i].oL_quantity,
            pOrderStatusData-
            >oL[i].oL_amount,
            pOrderStatusData-
            >oL[i].oL_delivery_d_day,
            pOrderStatusData-
            >oL[i].oL_delivery_d_month,
            pOrderStatusData-
            >oL[i].oL_delivery_d_year);
        }
    }
}

```

```

strcpy(szForm+c, szBR, (15-i)*5);
c += (15-i)*5;
strcpy(szForm+c,
"</font></PRE><HR><INPUT TYPE=\submit\>"
" <INPUT TYPE=\submit\ NAME=\CMD\>"
VALUE=\..Payment..\>"
" <INPUT TYPE=\submit\ NAME=\CMD\>"
VALUE=\..Delivery..\>"
" <INPUT TYPE=\submit\ NAME=\CMD\>"
VALUE=\..Order-Status..\>"
" <INPUT TYPE=\submit\ NAME=\CMD\>"
VALUE=\..Stock-Level..\>"
" <INPUT TYPE=\submit\ NAME=\CMD\>"
VALUE=\..Exit..\>"
" </BODY></FORM></HTML>");
}
}

/* FUNCTION: MakeDeliveryForm
* COMMENTS: The internal client buffer is created when the terminal id is
assigned and should not be freed except when the
client terminal id is no longer needed.
*/

void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData, BOOL bInput,
char *szForm)
{
    int i, c;
    c = wsprintf(szForm,
    <HTML><HEAD><TITLE>TPC-C
    Delivery</TITLE></HEAD><BODY>"
    " <FORM ACTION=\tpcc.d11\ METHOD=\GET\>"
    " <INPUT TYPE=\hidden\ NAME=\STATUSID\>"
    VALUE=\%d\>"
    " <INPUT TYPE=\hidden\ NAME=\ERROR\ VALUE=\0\>"
    " <INPUT TYPE=\hidden\ NAME=\FORMID\>"
    " <INPUT TYPE=\hidden\ NAME=\TERMID\>"
    " <INPUT TYPE=\hidden\ NAME=\SYNCID\>"
    " <PRE><font face=\Courier\>"
    " Warehouse: %4.4d<BR><BR>"
    " (Input && (pDeliveryData->exec_status_code !=
    eOK) ? ERR_TYPE_DELIVERY_POST : 0,
    DELIVERY_FORM, iTermId,
    Term.pClientData[iTermId].iSyncId, Term.pClientData[iTermId].w_id);
    if ( bInput )
    {
        strcpy( szForm+c,
        "Carrier Number: <INPUT NAME=\OCD*\>"
        "Execution Status: <BR><BR><BR><BR>"
        " <BR><BR><BR><BR><BR><BR><BR>"
        " <HR><INPUT TYPE=\submit\ NAME=\CMD\>"
        NAME=\CMD\ VALUE=\Menu\>"
        " </BODY></FORM></HTML>");
    }
    else
    {
        wsprintf( szForm+c,
        "Carrier Number: %2.2d<BR><BR>"
        "Execution Status: %s <BR><BR><BR>"
        " <BR><BR><BR><BR><BR><BR><BR>"
        " <HR><INPUT TYPE=\submit\ NAME=\CMD\>"
        NAME=\CMD\ VALUE=\NewOrder..\>"
        " <INPUT TYPE=\submit\ NAME=\CMD\>"
        VALUE=\..Payment..\>"
        " <INPUT TYPE=\submit\ NAME=\CMD\>"
        VALUE=\..Delivery..\>"
        " <INPUT TYPE=\submit\ NAME=\CMD\>"
        VALUE=\..Order-Status..\>"
        " <INPUT TYPE=\submit\ NAME=\CMD\>"
        VALUE=\..Stock-Level..\>"
        " <INPUT TYPE=\submit\ NAME=\CMD\>"
        VALUE=\..Exit..\>"
        " </BODY></FORM></HTML>"
        pDeliveryData->o_carrier_id,
        (pDeliveryData->exec_status_code ==
        eOK) ? "Delivery has been queued." : "Delivery Post Failed");
    }
}

/* FUNCTION: ProcessNewOrderForm
* PURPOSE: This function gets and validates the input data from the new order
form
* It then calls the SQLNewOrder
transaction, constructs the output form
and writes it back to client
browser.
*/

void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)

```

```

{
    PNEW_ORDER_DATA pNewOrder;
    pNewOrder = Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();
    ZeroMemory(pNewOrder, sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id = Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString, pNewOrder);
    Term.pClientData[iTermId].pTxn->NewOrder();
    pNewOrder = Term.pClientData[iTermId].pTxn->BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: void ProcessPaymentForm
* PURPOSE: This function gets and validates the input data from the payment
form
* It then calls the SQLPayment
transaction, constructs the output form
and writes it back to client
browser.
* ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB
passed in structure
pointer from inetsrv.
int iTermId
client
*/

void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)
{
    PPAYMENT_DATA pPayment;
    pPayment = Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id = Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString, pPayment);
    Term.pClientData[iTermId].pTxn->Payment();
    pPayment = Term.pClientData[iTermId].pTxn->BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessOrderStatusForm
* PURPOSE: This function gets and validates the input data from the Order
Status
form filling in the required input
variables. It then calls the
SQLOrderStatus transaction, constructs
the output form and writes it
back to client browser.
* ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB
passed in structure
pointer from inetsrv.
int iTermId
client
*/

void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;
    pOrderStatus = Term.pClientData[iTermId].pTxn-
    >BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus, sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id = Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString, pOrderStatus);
    Term.pClientData[iTermId].pTxn->OrderStatus();
    pOrderStatus = Term.pClientData[iTermId].pTxn-
    >BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
* PURPOSE: This function gets and validates the input data from the delivery
form
* It then calls the PostDeliveryInfo
Api, The client is then informed that
the transaction has been posted.
* ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB
passed in structure
pointer from inetsrv.
int iTermId
client
*/

void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)
{
    char *ptr = pECB->lpszQueryString;
    PDELIVERY_DATA pDelivery;
    pDelivery = Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
    ZeroMemory(pDelivery, sizeof(DELIVERY_DATA));
    pDelivery->w_id = Term.pClientData[iTermId].w_id;
}

```

```

        pDelivery->o_carrier_id = GetIntKeyValue(&ptr, "ocd*",
ERR_DELIVERY_MISSING_OCD_KEY, ERR_DELIVERY_CARRIER_INVALID);
        if ( pDelivery->o_carrier_id > 10 || pDelivery->o_carrier_id < 1 )
            throw new
CWEBClntErr( ERR_DELIVERY_CARRIER_ID_RANGE );
        if ( dwNumDeliveryThreads )
        {
            //post delivery info
            if ( PostDeliveryInfo(pDelivery->w_id, pDelivery->
>o_carrier_id )
                pDelivery->exec_status_code =
eDeliveryFailed;
            else
                pDelivery->exec_status_code = eOK;
        }
        else // delivery is done synchronously if no delivery threads
            configured
                Term.pClientData[iTermId].pTxn->Delivery();

        pDelivery = Term.pClientData[iTermId].pTxn->BuffAddr_Delivery();
        MakeDeliveryForm(iTermId, pDelivery, OUTPUT_FORM, szBuffer);
    }

/* FUNCTION: ProcessStockLevelForm
* PURPOSE: This function gets and validates the input data from the Stock
Level
* variables. It then calls the form filling in the required input
the output form and writes it SQLStockLevel transaction, constructs
* back to client browser.
* ARGUMENTS: EXTENSION_CONTROL_BLOCK *pECB passed in structure
pointer from inetrv.
                int
                iTermId      client
browser terminal id
*/
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer)
{
    char *ptr = pECB->lpszQueryString;
    PSTOCK_LEVEL_DATA pStockLevel;
    pStockLevel = Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel, sizeof(STOCK_LEVEL_DATA) );
    pStockLevel->w_id = Term.pClientData[iTermId].w_id;
    pStockLevel->d_id = Term.pClientData[iTermId].d_id;
    pStockLevel->threshold = GetIntKeyValue(&ptr, "IT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY, ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ( pStockLevel->threshold >= 100 || pStockLevel->threshold < 0 )
        throw new
CWEBClntErr( ERR_STOCKLEVEL_THRESHOLD_RANGE );
    Term.pClientData[iTermId].pTxn->StockLevel();
    pStockLevel = Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel, OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
* PURPOSE: This function extracts and validates the new order form data from
an http command string.
* ARGUMENTS: LPSTR lpszQueryString
                client browser http command string
                NEW_ORDER_DATA
                *pNewOrderData
                pointer to new order data
structure
*/
void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA *pNewOrderData)
{
    char szTmp[26];
    int i;
    short items;
    int o1_i_id, o1_quantity;
    char *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6] =
    { "SP00*", "SP01*", "SP02*", "SP03*", "SP04*",
      "SP05*", "SP06*", "SP07*", "SP08*", "SP09*",
      "SP10*", "SP11*", "SP12*", "SP13*", "SP14*",
      "SP15*", "SP16*", "SP17*", "SP18*", "SP19*",
      "SP20*", "SP21*", "SP22*", "SP23*", "SP24*",
      "SP25*", "SP26*", "SP27*", "SP28*", "SP29*",
      "SP30*", "SP31*", "SP32*", "SP33*", "SP34*",
      "SP35*", "SP36*", "SP37*", "SP38*", "SP39*",
      "SP40*", "SP41*", "SP42*", "SP43*", "SP44*",
      "SP45*", "SP46*", "SP47*", "SP48*", "SP49*",
      "SP50*", "SP51*", "SP52*", "SP53*", "SP54*",
      "SP55*", "SP56*", "SP57*", "SP58*", "SP59*",
      "SP60*", "SP61*", "SP62*", "SP63*", "SP64*",
      "SP65*", "SP66*", "SP67*", "SP68*", "SP69*",
      "SP70*", "SP71*", "SP72*", "SP73*", "SP74*",
      "SP75*", "SP76*", "SP77*", "SP78*", "SP79*",
      "SP80*", "SP81*", "SP82*", "SP83*", "SP84*",
      "SP85*", "SP86*", "SP87*", "SP88*", "SP89*",
      "SP90*", "SP91*", "SP92*", "SP93*", "SP94*",
      "SP95*", "SP96*", "SP97*", "SP98*", "SP99*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_NEWORDER_FORM_MISSING_DID, ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr, "CID*",
ERR_NEWORDER_CUSTOMER_KEY, ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS; i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp, sizeof(szTmp),

```

```

ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
            throw new
CWEBClntErr( ERR_NEWORDER_SUPPW_INVALID );
        pNewOrderData->ol_items.ol_supply_w_id
= (short)atoi(szTmp);
    }
    o1_i_id = pNewOrderData-
>ol_items.ol_i_id =
        GetIntKeyValue(&ptr,
szIID[i], ERR_NEWORDER_MISSING_IID_KEY, ERR_NEWORDER_ITEMID_INVALID);
        if ( o1_i_id > 999999 || o1_i_id < 1 )
            throw new
CWEBClntErr( ERR_NEWORDER_ITEMID_RANGE );
    o1_quantity = pNewOrderData-
>ol_items.ol_quantity =
        GetIntKeyValue(&ptr,
szQty[i], ERR_NEWORDER_MISSING_QTY_KEY, ERR_NEWORDER_QTY_INVALID);
        if ( o1_quantity > 99 || o1_quantity <
1 )
            throw new
CWEBClntErr( ERR_NEWORDER_QTY_RANGE );
    }
    items++;
    }
    else
        // nothing entered for supply warehouse,
        so item id and qty must also be blank
        GetKeyValue(&ptr, szIID[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_IID_KEY);
        if ( szTmp[0] )
            throw new
CWEBClntErr( ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );
        GetKeyValue(&ptr, szQty[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_QTY_KEY);
        if ( szTmp[0] )
            throw new
CWEBClntErr( ERR_NEWORDER_QTY_WITHOUT_SUPPW );
    }
    }
    if ( items == 0 )
        throw new
CWEBClntErr( ERR_NEWORDER_NOITEMS_ENTERED );
    pNewOrderData->o_o1_cnt = items;
}

/* FUNCTION: GetPaymentData
* PURPOSE: This function extracts and validates the payment form data from an
http command string.
* ARGUMENTS: LPSTR lpszQueryString
                client browser http command string
                PAYMENT_DATA *pPaymentData
                pointer to payment data structure
*/
void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA *pPaymentData)
{
    char szTmp[26];
    char *ptr = lpszQueryString;
    BOOL bCustIdBlank;
    pPaymentData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_PAYMENT_MISSING_DID_KEY, ERR_PAYMENT_DISTRICT_INVALID);
    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        bCustIdBlank = TRUE;
        pPaymentData->c_id = 0;
    }
    else
    {
        // parse customer id and verify that last name was
        bCustIdBlank = FALSE;
        if ( !IsNumeric(szTmp) )
            throw new
CWEBClntErr( ERR_PAYMENT_CUSTOMER_INVALID );
        pPaymentData->c_id = atoi(szTmp);
    }
    pPaymentData->c_w_id = GetIntKeyValue(&ptr, "CWI*",
ERR_PAYMENT_MISSING_CWI_KEY, ERR_PAYMENT_CWI_INVALID);
    pPaymentData->c_d_id = GetIntKeyValue(&ptr, "CDI*",
ERR_PAYMENT_MISSING_CDI_KEY, ERR_PAYMENT_CDI_INVALID);
    if ( bCustIdBlank )
        // customer id is blank, so last name must be entered
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);
    if ( szTmp[0] == 0 )
        throw new
CWEBClntErr( ERR_PAYMENT_CUSTOMER_CID_CLT );
    strcpy( szTmp );
    if ( strlen(pPaymentData->c_last) > LAST_NAME_LEN )
        throw new
CWEBClntErr( ERR_PAYMENT_LAST_NAME_TOO_LONG );
    strcpy(pPaymentData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_CLT_KEY);

```

```

        if ( szTmp[0] != 0 )
            throw new
CWEBClntErr( ERR_PAYMENT_CID_AND_CLT );
    }
    GetKeyValue(&ptr, "HAM*", szTmp, sizeof(szTmp),
ERR_PAYMENT_MISSING_HAM_KEY);
    if ( !IsDecimal(szTmp) )
        throw new CWEBClntErr( ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atoi(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 || pPaymentData->h_amount
< 0 )
        throw new CWEBClntErr( ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
* PURPOSE: This function extracts and validates the payment form data from an
http command string.
*/
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA
*orderStatusData)
{
    char szTmp[26];
    *ptr = lpszQueryString;
    pOrderStatusData->d_id = GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY, ERR_ORDERSTATUS_DID_INVALID);
    GetKeyValue(&ptr, "CID*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new
CWEBClntErr( ERR_ORDERSTATUS_MISSING_CID_CLT );
    }
    strcpy( szTmp );
    if ( strlen(pOrderStatusData->c_last) >
LAST_NAME_LEN )
        throw new
CWEBClntErr( ERR_ORDERSTATUS_CLT_RANGE );
    strcpy(pOrderStatusData->c_last, szTmp);
    }
    else
    {
        // parse customer id and verify that last name was
        if ( !IsNumeric(szTmp) )
            throw new
CWEBClntErr( ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id = atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp, sizeof(szTmp),
ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new
CWEBClntErr( ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
* PURPOSE: This function determines if a string is numeric. It fails if any
characters other
                than numeric and null terminator are
present.
* ARGUMENTS: char *ptr pointer to
string to check.
* RETURNS: BOOL FALSE if string is not all
numeric
                TRUE if string contains only numeric characters i.e. '0' -
'9'
*/
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;
    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
* PURPOSE: This function determines if a string is a non-negative decimal
value.
                It fails if any characters other than a series of numbers followed
by
                a decimal point, another series of
numbers, and a null terminator are present.
* ARGUMENTS: char *ptr pointer to
string to check.
* RETURNS: BOOL FALSE if string is not a valid
non-negative decimal value
                TRUE if string is OK
*/
BOOL IsDecimal(char *ptr)
{
    char *dotptr;

```

```

BOOL bvalid;
if ( *ptr == 0 )
    return FALSE;

// find decimal point
dotptr = strchr( ptr, '.' );
if (dotptr == NULL)
    // no decimal point, so just check for numeric
    return IsNumeric(ptr);
*dotptr = 0; // temporarily replace decimal with a terminator

if ( *ptr != 0 )
    bvalid = IsNumeric(ptr);
// string starts with decimal point
else if (*(dotptr+1) == 0)
    return FALSE; // nothing but a decimal point is bad
else
    bvalid = TRUE;

if (*(dotptr+1) != 0)
    // check text after decimal point
    bvalid &= IsNumeric(dotptr+1);

*dotptr = '.'; // replace decimal point
return bvalid;
}

```

isapi_dll/src/tpcc.def

LIBRARY TPCC.DLL

EXPORTS

```

GetExtensionVersion @1
HttpExtensionProc @2
TerminateExtension @3

```

isapi_dll/src/tpcc.h

```

/* FILE: TPCC.H Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* Version 4.10.000 audited
by Richard Gimarc, Performance Metrics, 3/17/99
* PURPOSE: Header file for ISAPI TPCC.DLL, defines structures
and functions used in the isapi tpcc.dll.
*/

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE 101
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101

#define TP_MAX_RETRIES 50

//note that the welcome form must be processed first as terminal ids assigned
here, once the
//terminal id is assigned then the forms can be processed in any order.
#define WELCOME_FORM //beginning form no term id assigned,
form id
#define MAIN_MENU_FORM //term id assigned main menu form id
#define NEW_ORDER_FORM //new order form id
#define PAYMENT_FORM //payment form id
#define DELIVERY_FORM //delivery form id
#define ORDER_STATUS_FORM //order status id
#define STOCK_LEVEL_FORM //stock level form id

//This macro is used to prevent the compiler error unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep distinct for each terminal
or client connection.
typedef struct _CLIENTDATA
{
    int iNextFree; //index of next free element or -1 if this entry in
use.
    int w_id; //warehouse id assigned at welcome form
    int d_id;
}

```

```

//district id assigned at welcome form
int iSyncId;
int iTickCount;
CTPCC_BASE *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational interface for terminal id
support.
typedef struct _TERM
{
    int iNumEntries;
    int //total allocated terminal array entries
iFreeList;
    int //next available terminal
array element or -1 if none
int iMasterSyncId;
    CLIENTDATA *pClientData; //synchronization id
//pointer to allocated client data
} TERM;

typedef TERM *PTERM;

//pointer to terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_IL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,
    ERR_NEWORDER_CUSTOMER_INVALID,
    ERR_NEWORDER_CUSTOMER_KEY,
    ERR_NEWORDER_DISTRICT_INVALID,
    ERR_NEWORDER_FORM_MISSING_DID,
    ERR_NEWORDER_ITEMID_INVALID,
    ERR_NEWORDER_QTY_RANGE,
    ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
    ERR_NEWORDER_MISSING_ID_KEY,
    ERR_NEWORDER_MISSING_QTY_KEY,
    ERR_NEWORDER_MISSING_SUPPW_KEY,
    ERR_NEWORDER_NOTITEMS_ENTERED,
    ERR_NEWORDER_QTY_INVALID,
    ERR_NEWORDER_QTY_RANGE,
    ERR_NEWORDER_SUPPW_INVALID,
    ERR_NO_SERVER_SPECIFIED,
    ERR_ORDERSTATUS_CID_AND_CLT,
    ERR_ORDERSTATUS_CID_INVALID,
    ERR_ORDERSTATUS_CLT_RANGE,
    ERR_ORDERSTATUS_DID_INVALID,
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    ERR_PAYMENT_CDI_INVALID,
    ERR_PAYMENT_CID_AND_CLT,
    ERR_PAYMENT_CUSTOMER_INVALID,
    ERR_PAYMENT_CWI_INVALID,
    ERR_PAYMENT_DISTRICT_INVALID,
    ERR_PAYMENT_HAM_INVALID,
    ERR_PAYMENT_HAM_RANGE,
    ERR_PAYMENT_LAST_NAME_TO_LONG,
    ERR_PAYMENT_MISSING_CDI_KEY,
    ERR_PAYMENT_MISSING_CID_CLT,
    ERR_PAYMENT_MISSING_CID_KEY,
    ERR_PAYMENT_MISSING_CLT,
    ERR_PAYMENT_MISSING_CLT_KEY,
    ERR_PAYMENT_MISSING_CWI_KEY,
    ERR_PAYMENT_MISSING_DID_KEY,
    ERR_PAYMENT_MISSING_HAM_KEY,
    ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
    ERR_STOCKLEVEL_THRESHOLD_INVALID,
    ERR_STOCKLEVEL_THRESHOLD_RANGE,
    ERR_VERSION_MISMATCH,
    ERR_W_ID_INVALID
};

class CWEBCLNT_ERR : public CBaseErr
{
public:
    CWEBCLNT_ERR(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };
    CWEBCLNT_ERR(WEBERROR Err, char *szTextDetail, DWORD
dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new

```

```

char[strlen(szTextDetail)+1];
        strcpy(m_szTextDetail, szTextDetail);
        m_SystemErr = dwSystemErr;
        m_szErrorText = NULL;
    };
    ~CWEBCLNT_ERR()
    {
        if (m_szTextDetail != NULL)
            delete [] m_szTextDetail;
        if (m_szErrorText != NULL)
            delete [] m_szErrorText;
    };
    WEBERROR m_Error;
    char *m_szTextDetail;
    char *m_szErrorText;
    DWORD m_SystemErr;
    int ErrorType() {return ERR_TYPE_WEBDLL;};
    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

//These constants have already been defined in engust.h, but since we do
//not want to include it in the delriv executab
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6 //used to record a warning
into the log

//function prototypes
BOOL WINAPI EntryD1Main(HANDLE hModule, DWORD u1_reason_for_call, LPVOID
lpReserved);
void WriteMessageToEventLog(LPCTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK *pECB, int *pCmd, int *pFormId,
int *pTermId, int *pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int iFormId, int iTermId);
void StatusCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int iError, int iErrorType,
char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey, char *pValue, int iMax,
WEBERROR err);
int GetIntKeyValue(char **pQueryString, char *pKey, WEBERROR noKeyErr, WEBERROR
NoIntErr);
void Terminate(int iTermId);
void TerminateAll(void);
void TerminateForm(int iTermId);
void ErrorMessageForm(int iTermId, int iSyncId, char *szBuffer);
void MakeMainMenuForm(int iTermId, int iSyncId, char *szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA *pStockLevelData, BOOL
bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA *pNewOrderData, BOOL bInput,
char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA *pPaymentData, BOOL bInput, char
*szForm);
void MakeOrderStatusForm(int iTermId, ORDER_STATUS_DATA *pOrderStatusData, BOOL
bInput, char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA *pDeliveryData, BOOL bInput,
char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK *pECB, int iTermId, char
*szBuffer);
void GetNewOrderData(LPSTR lpszQueryString, NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString, PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString, ORDER_STATUS_DATA
*OrderStatusData);
void PostDeliveryInfo(short w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);

```

isapi_dll/src/tpcc.rc

```

//Microsoft Developer Studio generated resource script.
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
// Generated from the TEXTINCLUDE 2 resource.
#include "afxres.h"
#undef APSTUDIO_READONLY_SYMBOLS

// English (U.S.) resources
#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)

```

```

#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef _MAC
////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILES 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C HTML DLL Server (DBLIB)\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "TPC-C HTML DLL Server (DBLIB)\0"
            VALUE "FileVersion", "0, 4, 0, 0\0"
            VALUE "InternalName", "tpcc0"
            VALUE "LegalCopyright", "Copyright © 1997\0"
            VALUE "OriginalFilename", "tpcc.dll\0"
            VALUE "ProductName", "Microsoft tpcc\0"
            VALUE "ProductVersion", "0, 4, 0, 0\0"
        END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END

#endif // !_MAC

#ifdef APSTUDIO_INVOKED
////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
// TEXTINCLUDE
//

1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include ""afxres.h""\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
// Dialog
//

IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION | WS_SYSMENU
CAPTION "Dialog"
FONT 8 "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON "OK",IDOK,129,7,50,14
    PUSHBUTTON "Cancel",IDCANCEL,129,24,50,14
END

////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
END
#endif // APSTUDIO_INVOKED

#ifdef English (U.S.) resources
////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////

```

```

#ifdef APSTUDIO_INVOKED
////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
// Generated from the TEXTINCLUDE 3 resource.
//

#endif // not APSTUDIO_INVOKED

////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
// Microsoft Developer Studio Project File - Name="tm_com_dll" - Package
// Owner=<4>
// Microsoft Developer Studio Generated Build File, Format Version 6.00
// ** DO NOT EDIT **

# TARGETTYPE "win32 (x86) Dynamic-Link Library" 0x0102

CFG=tm_com_dll - win32 Debug
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tm_com_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE NMAKE /f "tm_com_dll.mak" CFG="tm_com_dll - win32 Debug"
!MESSAGE Possible choices for configuration are:
!MESSAGE "tm_com_dll - win32 Release" (based on "win32 (x86) Dynamic-Link
!MESSAGE Library")
!MESSAGE "tm_com_dll - win32 Debug" (based on "win32 (x86) Dynamic-Link
!MESSAGE Library")

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=c:\exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "tm_com_dll - win32 Release"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX
/FD /c
# ADD CPP /nologo /MD /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD
/c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odb32.lib odbccp32.lib /nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odb32.lib
odbccp32.lib /nologo /subsystem:windows /dll /machine:I386
/out:".bin\tpcc_com.dll"

!ELSEIF "$(CFG)" == "tm_com_dll - win32 Debug"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /w3 /Gm /GX /ZI /od /D "WIN32" /D "_DEBUG" /D
_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /w3 /Gm /GX /ZI /od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "DEBUG"
# ADD RSC /l 0x409 /d "DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe

```

tm_com_dll/tm_com_dll.dsp

```

# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odb32.lib odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386
/pdbtype:sept
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odb32.lib
odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386
/out:".bin\tpcc_com.dll" /pdbtype:sept

!ENDIF

# Begin Target

# Name "tm_com_dll - win32 Release"
# Name "tm_com_dll - win32 Debug"
# Begin Source File

SOURCE=.\src\tpcc_com.cpp
# End Source File
# Begin Source File

SOURCE=.\src\tpcc_com.h
# End Source File
# End Target
# End Project

```

tm_com_dll/src/tpcc_com.cpp

```

/* FILE: TPCC_COM.CPP Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* not yet audited
* PURPOSE: Source file for TPC-C COM+ class implementation.
* Contact: Charles Levine (clevine@microsoft.com)
* Change history: 4.20.000 - first version
*/

// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DLLDECL __declspec( dllexport )

#include "..\..\common\src\trans.h" //tpckit transaction
header contains definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_com.h"

#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\tpcc_com_all\src\tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec( dllexport ) CTPCC_COM+ CTPCC_COM_new(BOOL bSinglePool)
{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM+::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    LONG lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTnx = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_VTnx);
    m_VTnx.vt = VT_SAFEARRAY;

    m_VTnx.parray = SafeArrayCreateVector(VT_UI1, ulTmpSize,
ulTmpSize);
    if (!m_VTnx.parray)
        throw new CCOMERR( E_FAIL );

    memset( (void*)m_VTnx.parray->pvData, 0, ulTmpSize);
    m_pTnx = (COM_DATA*)m_VTnx.parray->pvData;

    hr = CoInitializeEx(NULL, COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

```

```

// all txns will use same component
m_pPayment = m_pNewOrder;
m_pStockLevel = m_pNewOrder;
m_pOrderStatus = m_pNewOrder;
}
else
{
// use different components for each txn
CLSCCTX_SERVER, IID_ITPCC, hr = CoCreateInstance(CLSID_NewOrder, NULL,
(void **)&m_pNewOrder);
if (FAILED(hr))
throw new CCOMERR(hr);

CLSCCTX_SERVER, IID_ITPCC, hr = CoCreateInstance(CLSID_Payment, NULL,
(void **)&m_pPayment);
if (FAILED(hr))
throw new CCOMERR(hr);

CLSCCTX_SERVER, IID_ITPCC, hr = CoCreateInstance(CLSID_StockLevel, NULL,
(void **)&m_pStockLevel);
if (FAILED(hr))
throw new CCOMERR(hr);

CLSCCTX_SERVER, IID_ITPCC, hr = CoCreateInstance(CLSID_OrderStatus, NULL,
(void **)&m_pOrderStatus);
if (FAILED(hr))
throw new CCOMERR(hr);
}

// call setcomplete to release each component back into pool
hr = m_pNewOrder->CallSetComplete();
if (FAILED(hr))
throw new CCOMERR(hr);

if (!m_bSinglePool)
{
hr = m_pPayment->CallSetComplete();
if (FAILED(hr))
throw new CCOMERR(hr);

hr = m_pStockLevel->CallSetComplete();
if (FAILED(hr))
throw new CCOMERR(hr);

hr = m_pOrderStatus->CallSetComplete();
if (FAILED(hr))
throw new CCOMERR(hr);
}
}

CTPCC_COM::~CTPCC_COM()
{
if (m_pTxn) SafeArrayDestroy(m_VTxn.parray);

ReleaseInterface(m_pNewOrder);
if (!m_bSinglePool)
{
ReleaseInterface(m_pPayment);
ReleaseInterface(m_pStockLevel);
ReleaseInterface(m_pOrderStatus);
}
CoInitialize();
}

void CTPCC_COM::NewOrder()
{
VARIANT vTxn_out;
HRESULT hr = m_pNewOrder->NewOrder(m_VTxn, &vTxn_out);
if (FAILED(hr))
throw new CCOMERR( hr );
memcpy(m_pTxn, (void *)vTxn_out.parray->pvData, vTxn_out.parray->
>rgsabound[0].cElements);
SafeArrayDestroy(vTxn_out.parray);

if ( m_pTxn->ErrorType != ERR_SUCCESS )
throw new CCOMERR( m_pTxn->ErrorType, m_pTxn-
>error );
}

void CTPCC_COM::Payment()
{
VARIANT vTxn_out;
HRESULT hr = m_pPayment->Payment(m_VTxn, &vTxn_out);
if (FAILED(hr))
throw new CCOMERR( hr );
memcpy(m_pTxn, (void *)vTxn_out.parray->pvData, vTxn_out.parray->
>rgsabound[0].cElements);
SafeArrayDestroy(vTxn_out.parray);

if ( m_pTxn->ErrorType != ERR_SUCCESS )
throw new CCOMERR( m_pTxn->ErrorType, m_pTxn-
>error );
}

void CTPCC_COM::StockLevel()
{
VARIANT vTxn_out;
HRESULT hr = m_pStockLevel->StockLevel(m_VTxn, &vTxn_out);
if (FAILED(hr))
throw new CCOMERR( hr );
memcpy(m_pTxn, (void *)vTxn_out.parray->pvData, vTxn_out.parray->
>rgsabound[0].cElements);
SafeArrayDestroy(vTxn_out.parray);

if ( m_pTxn->ErrorType != ERR_SUCCESS )
throw new CCOMERR( m_pTxn->ErrorType, m_pTxn-
>error );
}

```

```

>error );
}

void CTPCC_COM::OrderStatus()
{
VARIANT vTxn_out;
HRESULT hr = m_pOrderStatus->OrderStatus(m_VTxn, &vTxn_out);
if (FAILED(hr))
throw new CCOMERR( hr );
memcpy(m_pTxn, (void *)vTxn_out.parray->pvData, vTxn_out.parray->
>rgsabound[0].cElements);
SafeArrayDestroy(vTxn_out.parray);

if ( m_pTxn->ErrorType != ERR_SUCCESS )
throw new CCOMERR( m_pTxn->ErrorType, m_pTxn-
>error );
}

```

tm_com_dll/src/tpcc_com.h

```

/* FILE: TPCC_COM.H Microsoft TPC-C Kit Ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* not yet audited
* PURPOSE: Header file for TPC-C COM+ class implementation.
* change history: 4.20.000 - first version
*/
#pragma once
#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"
// need to declare functions for import, unless define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CCOMERR : public CBaseErr
{
private:
char m_szErrorText[64];

public:
// use this interface for genuine COM errors
CCOMERR( HRESULT hr )
{
m_hr = hr;
m_iErrorType = 0;
m_iError = 0;
}

// use this interface to impersonate a non-COM error
CCOMERR( int iErrorType, int iError )
{
m_iErrorType = iErrorType;
m_iError = iError;
m_hr = S_OK;
}

int m_hr;
int m_iErrorType;
int m_iError;

// A CCOMERR class can impersonate another class,
// was not actually a COM Services error, but was
// simply transmitted back via COM.
int iErrorType()
{
if (m_iErrorType == 0)
return ERR_TYPE_COM;
else
return m_iErrorType;
}

int ErrorNum() {return m_hr;}
char *ErrorText()
{
if (m_hr == S_OK)
sprintf( m_szErrorText,
"Error: Class %d, error # %d", m_iErrorType, m_iError );
else
sprintf( m_szErrorText,
"Error: COM HRESULT %x", m_hr );
return m_szErrorText;
}
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
BOOL m_bSinglePool;

// COM Interface pointers
ITPCC* m_pNewOrder;
ITPCC* m_pPayment;

```

```

ITPCC* m_pStockLevel;
ITPCC* m_pOrderStatus;

struct COM_DATA
{
int ErrorType;
int error;
union
{
NEW_ORDER_DATA
PAYMENT_DATA
DELIVERY_DATA
STOCK_LEVEL_DATA
ORDER_STATUS_DATA
} *m_pTxn;
};

public:
CTPCC_COM(BOOL bSinglePool);
~CTPCC_COM(void);

inline PNEW_ORDER_DATA { return &m_pTxn-
>u.NewOrder; }
inline PPAYMENT_DATA { return &m_pTxn-
>u.Payment; }
inline PDELIVERY_DATA { return &m_pTxn-
>u.Delivery; }
inline PSTOCK_LEVEL_DATA { return &m_pTxn->u.StockLevel; };
inline PORDER_STATUS_DATA { return &m_pTxn->u.OrderStatus; };

void NewOrder();
void Payment();
void Delivery();
void StockLevel();
void OrderStatus();

void NewOrder();
void Payment();
void Delivery();
void StockLevel();
void OrderStatus();
void Delivery();
};

inline void ReleaseInterface(IUnknown *punk)
{
if (punk)
{
punk->Release();
punk = NULL;
}
}

// wrapper routine for class constructor
extern "C" __declspec(dllimport) CTPCC_COM* CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

```

tpcc_com_all/tpcc_com_all.dsp

```

# Microsoft Developer Studio Project File - Name="tpcc_com_all" - Package
Owner=<4>
# Microsoft Developer Studio Generated Build File, Format Version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "win32 (x86) Dynamic-Link Library" 0x0102

CFG=tpcc_com_all - win32 Debug
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_all.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE NMAKE /f "tpcc_com_all.mak" CFG="tpcc_com_all - win32 Debug"
!MESSAGE Possible choices for configuration are:
!MESSAGE "tpcc_com_all - win32 Release" (based on "win32 (x86) Dynamic-Link
!MESSAGE Library")
!MESSAGE "tpcc_com_all - win32 Debug" (based on "win32 (x86) Dynamic-Link
!MESSAGE Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=c:\exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "tpcc_com_all - win32 Release"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0

```

```

# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MT /w3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kerne132.lib user32.lib gdi32.lib winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 ..\db_dll\bin\tpcc_db1ib.lib ..\db_odbc_dll\bin\tpcc_odbc.lib
kerne132.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /machine:I386
!ELSEIF "$(CFG) == "tpcc_com_all - win32 Debug"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /w3 /Gm /GX /ZI /od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MTd /w3 /Gm /GX /ZI /od /D "WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyp1ib203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kerne132.lib user32.lib gdi32.lib winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386
/pdbtype:sept
# ADD LINK32 ..\db_dll\bin\tpcc_db1ib.lib ..\db_odbc_dll\bin\tpcc_odbc.lib
kerne132.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /debug /machine:I386
/pdbtype:sept
!ENDIF
# Begin Target
# Name "tpcc_com_all - win32 Release"
# Name "tpcc_com_all - win32 Debug"
# Begin Group "Source"
# PROP Default_Filter "*.cpp, *.c"
# Begin Source File
SOURCE=.\src\tpcc_com_all.cpp
# SUBTRACT CPP /YX
# End Source File
# Begin Source File
SOURCE=.\src\tpcc_com_all.def
# End Source File
# Begin Source File
SOURCE=.\src\tpcc_com_all.idl
!IF "$(CFG) == "tpcc_com_all - win32 Release"
# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\src\tpcc_com_all.idl
BuildCmds= \
midl /oicf /h "tpcc_com_all.h" /iid "tpcc_com_all.i.c"
".\src\tpcc_com_all.idl" /out ".\src"
".\src\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
".\src\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
".\src\tpcc_com_all.i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
# End Custom Build
!ELSEIF "$(CFG) == "tpcc_com_all - win32 Debug"

```

```

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\src\tpcc_com_all.idl
BuildCmds= \
midl /oicf /h "tpcc_com_all.h" /iid "tpcc_com_all.i.c"
".\src\tpcc_com_all.idl" /out ".\src"
".\src\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
".\src\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
".\src\tpcc_com_all.i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
# End Custom Build
!ENDIF
# End Source File
# End Group
# Begin Group "Header"
# PROP Default_Filter "*.h"
# Begin Source File
SOURCE=.\src\Methods.h
# End Source File
# Begin Source File
SOURCE=.\src\resource.h
# End Source File
# End Group
# Begin Source File
SOURCE=.\src\tpcc_com_all.rc
# End Source File
# End Target
# End Project

```

tpcc_com_all/src/Methods.h

```

4.20.000 FILE: METHODS.H Microsoft TPC-C Kit Ver.
*
* All Rights Reserved Copyright Microsoft, 1999
*
* not yet audited
*
* PURPOSE: Header file for COM components.
*
* Change history: 4.20.000 - first version
*/

enum COMPONENT_ERROR
{
ERR_MISSING_REGISTRY_ENTRIES = 1,
ERR_LOADDLL_FAILED,
ERR_GETPROCADDR_FAILED,
ERR_UNKNOWN_DB_PROTOCOL
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
CCOMPONENT_ERR(COMPONENT_ERROR Err)
{
m_Error = Err;
m_szTextDetail = NULL;
m_SystemErr = 0;
m_szErrorText = NULL;
};
CCOMPONENT_ERR(COMPONENT_ERROR Err, char
*szTextDetail, DWORD dwSystemErr)
{
m_Error = Err;
m_szTextDetail = new
strncpy( m_szTextDetail, szTextDetail );
m_SystemErr = dwSystemErr;
m_szErrorText = NULL;
};
~CCOMPONENT_ERR()
{
if (m_szTextDetail != NULL)
delete [] m_szTextDetail;
if (m_szErrorText != NULL)
delete [] m_szErrorText;
};
};

COMPONENT_ERROR m_Error;
char *m_szTextDetail;
char *m_szErrorText;
DWORD m_SystemErr;
int ErrorType() {return ERR_TYPE_COMPONENT;};
int ErrorNum() {return m_Error;};
char *ErrorText();

```

```

};

static void WriteMessageToEventLog(LPCTSTR lpszMsg);

////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
public ITPCC,
public IObjectContext,
public IObjectContext,
public CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
COM_INTERFACE_ENTRY(ITPCC)
COM_INTERFACE_ENTRY(IObjectContext)
COM_INTERFACE_ENTRY(IObjectContext)
END_COM_MAP()

CTPCC_Common();
~CTPCC_Common();

// ITPCC
public:
HRESULT __stdcall NewOrder( VARIANT
txn_in, VARIANT* txn_out);
HRESULT __stdcall Payment( VARIANT txn_in, VARIANT*
txn_out);
HRESULT __stdcall Delivery( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;};
HRESULT __stdcall StockLevel( VARIANT txn_in, VARIANT*
txn_out);
HRESULT __stdcall OrderStatus( VARIANT txn_in, VARIANT*
txn_out);
HRESULT __stdcall CallSetComplete();

// IObjectContext
STDMETHODIMP (BOOL) CanBePooled() { return m_bCanBePooled; }
STDMETHODIMP Activate() { return S_OK; } // we don't
support COM Services transactions (no enlistment)
STDMETHODIMP (void) Deactivate() { /* nothing to do */ }

// IObjectContext
STDMETHODIMP Construct(IDispatch *punk);

private:
// helper methods
BOOL m_bCanBePooled;
CTPCC_BASE *m_pTxn;

struct COM_DATA
{
int retval;
int error;
union
{
NEW_ORDER_DATA
PAYMENT_DATA Payment;
DELIVERY_DATA Delivery;
STOCK_LEVEL_DATA StockLevel;
ORDER_STATUS_DATA OrderStatus;
};
};

////////////////////////////////////
// CTPCC
class CTPCC :
public CTPCC_Common,
public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)
BEGIN_COM_MAP(CTPCC)
COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()
};

////////////////////////////////////
// CNewOrder
class CNewOrder :
public CTPCC_Common,
public CComCoClass<CNewOrder, &CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)
BEGIN_COM_MAP(CNewOrder)
COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
HRESULT __stdcall NewOrder( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;};
HRESULT __stdcall Payment( VARIANT txn_in, VARIANT*
txn_out) {return E_NOTIMPL;};
HRESULT __stdcall StockLevel( VARIANT txn_in, VARIANT*
txn_out) {return E_NOTIMPL;};
HRESULT __stdcall OrderStatus( VARIANT txn_in, VARIANT*
txn_out) {return E_NOTIMPL;};
};

```

```

////////////////////////////////////
// COrderStatus
class COrderStatus :
public CTPCC_Common,
public CComCoClass<COrderStatus, &CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
HRESULT __stdcall NewOrder(
    VARIANT* txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    VARIANT txn_in, VARIANT*
    VARIANT* txn_out) {return E_NOTIMPL;}
    VARIANT txn_in, VARIANT*
    VARIANT* txn_out) {return E_NOTIMPL;}
    VARIANT txn_in, VARIANT*
    VARIANT* txn_out) {return E_NOTIMPL;}
};

////////////////////////////////////
// CPayment
class CPayment :
public CTPCC_Common,
public CComCoClass<CPayment, &CLSID_Payment>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
HRESULT __stdcall NewOrder(
    VARIANT* txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    VARIANT txn_in, VARIANT*
    VARIANT* txn_out) {return E_NOTIMPL;}
    VARIANT txn_in, VARIANT*
    VARIANT* txn_out) {return E_NOTIMPL;}
    VARIANT txn_in, VARIANT*
    VARIANT* txn_out) {return E_NOTIMPL;}
};

////////////////////////////////////
// CStockLevel
class CStockLevel :
public CTPCC_Common,
public CComCoClass<CStockLevel, &CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
COM_INTERFACE_ENTRY2(IUnknown, CComObjectRootEx)
COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
HRESULT __stdcall NewOrder(
    VARIANT* txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    VARIANT txn_in, VARIANT*
    VARIANT* txn_out) {return E_NOTIMPL;}
    VARIANT txn_in, VARIANT*
    VARIANT* txn_out) {return E_NOTIMPL;}
    VARIANT txn_in, VARIANT*
    VARIANT* txn_out) {return E_NOTIMPL;}
};

```

tpcc_com_all/src/resource.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc_com_all.rc

#define IDS_PROJNAME 100
#define IDR_TPCC 101
#define IDR_NEWORDER 102
#define IDR_ORDERSTATUS 103
#define IDR_PAYMENT 104
#define IDR_STOCKLEVEL 105

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 202
#define _APS_NEXT_COMMAND_VALUE 32768
#define _APS_NEXT_CONTROL_VALUE 201
#define _APS_NEXT_SYMED_VALUE 106
#endif
#endif

```

tpcc_com_all/src/tpcc_com_all.cpp

```

/* FILE: TPCC_COM_ALL.CPP
Microsoft TPC-C Kit Ver.
4.20.000
Copyright Microsoft, 1999
All Rights Reserved
Version 4.10.000 audited
by Richard Gimarc, Performance Metrics, 3/17/99
PURPOSE: Implementation for TPC-C Tuxedo class.
Contact: Charles Levine (clevine@microsoft.com)
Change history: 4.20.000 - updated rev number to match kit
*/

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADED

#include <stdio.h>
#include <atlbase.h>
// You may derive a class from CComModule and use it if you want to override
// something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <intguid.h>
#include <transact.h>
#include <atlimp1.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"
// tpckit transaction header contains definitions of structures
specific
to TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\db_dblib_d11\src\tpcc_dblib.h" // DBLIB
implementation of TPC-C txns
#include "..\..\db_odbc_d11\src\tpcc_odbc.h" // ODBC
implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all.i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
OBJECT_ENTRY(CLSID_TPCC, CTPCC)
OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
OBJECT_ENTRY(CLSID_OrderStatus, COrderStatus)
OBJECT_ENTRY(CLSID_Payment, CPayment)
OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA
Reg;
char
szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];

static HINSTANCE hLibInstanceDb = NULL;
TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

////////////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID /*lpReserved*/)
{
char szDllName[128];
try
{
if (dwReason == DLL_PROCESS_ATTACH)
{
_Module.Init(ObjectMap, hInstance);
DisableThreadLibraryCalls(hInstance);

DWORD dwSize =
GetComputerName(szMyComputerName,
&dwSize);
szMyComputerName[dwSize] = 0;
if (ReadTPCCRegistrySettings(&Reg))
throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );
if (Reg.eDb_Protocol == DBLIB)
{

```

```

strcpy( szDllName,
strcat( szDllName,
"tpcc_dblib.d11");
hLibInstanceDb =
LoadLibrary( szDllName );
if (hLibInstanceDb ==
NULL)
throw new
CCOMPONENT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );
// get function pointer to
wrapper for class constructor
pCTPCC_DBLIB_new =
(TYPE_CTPCC_DBLIB*) GetProcAddress(hLibInstanceDb, "pCTPCC_DBLIB_new");
if (pCTPCC_DBLIB_new ==
NULL)
throw new
CCOMPONENT_ERR( ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
else if (Reg.eDb_Protocol == ODBC)
{
strcpy( szDllName,
"tpcc_odbc.d11");
strcat( szDllName,
LoadLibrary( szDllName );
hLibInstanceDb =
if (hLibInstanceDb ==
NULL)
throw new
CCOMPONENT_ERR( ERR_LOADDLL_FAILED, szDllName, GetLastError() );
// get function pointer to
wrapper for class constructor
pCTPCC_ODBC_new =
(TYPE_CTPCC_ODBC*) GetProcAddress(hLibInstanceDb, "pCTPCC_ODBC_new");
if (pCTPCC_ODBC_new ==
NULL)
throw new
CCOMPONENT_ERR( ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
else
throw new
CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL );
else if (dwReason == DLL_PROCESS_DETACH)
_Module.Term();
}
catch (CBaseErr *e)
{
writeMessageToEventLog(e->ErrorText());
delete e;
return FALSE;
}
catch (...)
{
writeMessageToEventLog(TEXT("Unhandled exception in
object DllMain"));
return FALSE;
}
return TRUE; // OK
}

////////////////////////////////////
// Used to determine whether the DLL can be unloaded by OLE
STDAPI DllCanUnloadNow(void)
{
return (_Module.GetLockCount()==0) ? S_OK : S_FALSE;
}

////////////////////////////////////
// Returns a class factory to create an object of the requested type
STDAPI DllGetClassObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv)
{
return _Module.GetClassObject(rclsid, riid, ppv);
}

////////////////////////////////////
// DllRegisterServer - Adds entries to the system registry
STDAPI DllRegisterServer(void)
{
// registers object, typelib and all interfaces in typelib
return _Module.RegisterServer(TRUE);
}

////////////////////////////////////
// DllUnregisterServer - Removes entries from the system registry
STDAPI DllUnregisterServer(void)
{
return _Module.UnregisterServer();
}

static void writeMessageToEventLog(LPTSTR lpszMsg)
{
TCHAR szMsg[256];
HANDLE hEventSource;
LPTSTR lpszStrings[2];
// use event logging to log the error.
hEventSource = RegisterEventSource(NULL, TEXT("tpcc_com_all.d11"));
_lprintf(szMsg, TEXT("Error in COM+ TPC-C Component: "));

```

```

lpszStrings[0] = szMsg;
lpszStrings[1] = lpszMsg;
if (hEventSource != NULL)
{
    ReportEvent(hEventSource, // handle of event source
               EVENTLOG_ERROR_TYPE, // event type
               0, // event category
               0, // event ID
               NULL, // current user's SID
               2, // strings in lpszStrings
               0, // no bytes of raw data
               (LPCTSTR *)lpszStrings, // array of error strings
               NULL); // no raw data
}
(VOID) DeregisterEventSource(hEventSource);
}
}

inline void ReleaseInterface(IUnknown *punk)
{
    if (punk)
    {
        punk->Release();
        punk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*/
char* CCOMPONENT_ERR::ErrorText(void)
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES, "Required
        entries missing from registry." },
        { ERR_LOADDLL_FAILED, "Load of DLL
        failed. DLL=" },
    },
    { ERR_GETPROCADDR_FAILED, "Could not
    map proc in DLL. GetProcAddress error. DLL=" },
    { ERR_UNKNOWN_DB_PROTOCOL, "Unknown
    database protocol specified in registry." },
    { 0, "" },
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown error
        number." );
        break;
    }
    if (m_Error == errorMsgs[i].iError)
    {
        strcpy( szTmp, errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    sprintf( szTmp+strlen(szTmp), " Error=%d",
    m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{
    if (m_pTxn) delete m_pTxn;
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjContext = NULL;
    // get our object context
    HRESULT hr = CoGetObjectContext( IID_IObjectContext, (void
    **)&pObjContext );
    pObjContext->SetComplete();
    ReleaseInterface(pObjContext);
    return hr;
}

//
// called by the ctor activator

```

```

STDMETHODIMP CTPCC_Common::Construct(IDispatch * punk)
{
    // Code to access construction string, if needed later...
    if (!punk)
        return E_UNEXPECTED;
    IObjectConstructString * pString = NULL;
    HRESULT hr = punk->QueryInterface(IID_IObjectConstructString, (void **)&pString);
    pString->Release();
    try
    {
        if (Reg.eDB_Protocol == ODBC)
            m_pTxn = pCTPCC_ODBC_new( Reg.szDbServer,
            Reg.szDbuser, Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        else if (Reg.eDB_Protocol == DBLIB)
            m_pTxn = pCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbuser, Reg.szDbPassword,
            szMyComputerName, Reg.szDbName );
    }
    catch (CBaseErr *e)
    {
        WriteMessageToEventLog(e->ErrorText());
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception in
        object ::Construct"));
        return E_FAIL;
    }
    return S_OK;
}

HRESULT CTPCC_Common::NewOrder(VARIANT txn_in, VARIANT* txn_out)
{
    PNEW_ORDER_DATA pNewOrder;
    COM_DATA *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray->pvData;
        pNewOrder = m_pTxn->BuffAddr_NewOrder();
        memcpy(pNewOrder, &pData->u.NewOrder,
        sizeof(NEW_ORDER_DATA));
        m_pTxn->NewOrder(); // do the
        actual txn
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray = SafeArrayCreateVector(VT_UI1,
        txn_in.parray->rgsabound->cElements,
        txn_in.parray->rgsabound->cElements);
        pData = (COM_DATA*) txn_out->parray->pvData;
        memcpy( &pData->u.NewOrder, pNewOrder,
        sizeof(NEW_ORDER_DATA));
        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes,
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e-
        >ErrorNum() == 10005)) ||
        ((e->ErrorType() == ERR_TYPE_ODBC) &&
        (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::Payment(VARIANT txn_in, VARIANT* txn_out)
{
    PPAYMENT_DATA pPayment;
    COM_DATA *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray->pvData;
        pPayment = m_pTxn->BuffAddr_Payment();
        memcpy(pPayment, &pData->u.Payment,
        sizeof(PAYMENT_DATA));
        m_pTxn->Payment(); // do the
        actual txn
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray = SafeArrayCreateVector( VT_UI1,
        txn_in.parray->rgsabound->cElements,

```

```

        txn_in.parray->rgsabound->cElements);
        pData = (COM_DATA*) txn_out->parray->pvData;
        memcpy( &pData->u.Payment, pPayment,
        sizeof(PAYMENT_DATA));
        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes,
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e-
        >ErrorNum() == 10005)) ||
        ((e->ErrorType() == ERR_TYPE_ODBC) &&
        (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in, VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA pStockLevel;
    COM_DATA *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray->pvData;
        pStockLevel = m_pTxn->BuffAddr_StockLevel();
        memcpy(pStockLevel, &pData->u.StockLevel,
        sizeof(STOCK_LEVEL_DATA));
        m_pTxn->StockLevel();
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray = SafeArrayCreateVector( VT_UI1,
        txn_in.parray->rgsabound->cElements,
        txn_in.parray->rgsabound->cElements);
        pData = (COM_DATA*)txn_out->parray->pvData;
        memcpy( &pData->u.StockLevel, pStockLevel,
        sizeof(STOCK_LEVEL_DATA));
        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes,
        if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e-
        >ErrorNum() == 10005)) ||
        ((e->ErrorType() == ERR_TYPE_ODBC) &&
        (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txn_in, VARIANT* txn_out)
{
    PORDER_STATUS_DATA pOrderStatus;
    COM_DATA *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray->pvData;
        pOrderStatus = m_pTxn->BuffAddr_OrderStatus();
        memcpy(pOrderStatus, &pData->u.OrderStatus,
        sizeof(ORDER_STATUS_DATA));
        m_pTxn->OrderStatus();
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray = SafeArrayCreateVector( VT_UI1,
        txn_in.parray->rgsabound->cElements,

```

```

    txn_in.parray->rgsabound->cElements);
    pdata = (COM_DATA*)txn_out->parray->pvData;
    memcpy(&pdata->u.OrderStatus, pOrderStatus,
sizeof(ORDER_STATUS_DATA));

    pdata->retval = ERR_SUCCESS;
    pdata->error = 0;
    return S_OK;
}
catch (CBaseErr *e)
{
    // check for lost database connection; if yes,
    component is toast
    if ( ((e->ErrorType() == ERR_TYPE_DBLIB) && (e-
>ErrorNum() == 10005)) ||
        ((e->ErrorType() == ERR_TYPE_ODBC) &&
(e->ErrorNum() == 10054)) )
        m_bCanBePooled = FALSE;

    pdata->retval = e->ErrorType();
    pdata->error = e->ErrorNum();
    delete e;
    return E_FAIL;
}
}
catch (...)
{
    writeMessageToEventLog(TEXT("Unhandled exception.));
    pdata->retval = ERR_TYPE_LOGIC;
    pdata->error = 0;
    m_bCanBePooled = FALSE;
    return E_FAIL;
}
}
}
}
}

```

tpcc_com_all/src/tpcc_com_all.def

```

; tpcc_com_all.def : Declares the module parameters.

LIBRARY "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow @1 PRIVATE
    DllGetClassObject @2 PRIVATE
    DllRegisterServer @3 PRIVATE
    DllUnregisterServer @4 PRIVATE

```

tpcc_com_all/src/tpcc_com_all.h

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:14 2001 */
/* Compiler settings for .\src\tpcc_com_all.idl:
  oicf (OptLev=12), w1, Zp8, env=win32 (32b run), ms_ext, c_ext
  error checks: allocation ref bounds_check enum stub_data
  VC__declspec() decoration level:
    __declspec(uuid()), __declspec(selectany), __declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough to compile this file*/
#ifdef _REQUIRED_RPCNDR_H_VERSION_
#define _REQUIRED_RPCNDR_H_VERSION_ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifdef __tpcc_com_all_h__
#define __tpcc_com_all_h__

/* Forward Declarations */

#ifdef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__

#ifdef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */
#endif /* __TPCC_FWD_DEFINED__ */

#ifdef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__

#ifdef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

```

```

#endif /* __NewOrder_FWD_DEFINED__ */

#ifdef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

#ifdef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */
#endif /* __OrderStatus_FWD_DEFINED__ */

#ifdef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifdef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */
#endif /* __Payment_FWD_DEFINED__ */

#ifdef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

#ifdef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */
#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifdef __cplusplus
extern "C" {
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#ifdef __TPCCLib_LIBRARY_DEFINED__
#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;

EXTERN_C const CLSID CLSID_TPCC;

#ifdef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifdef __cplusplus
class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifdef __cplusplus
class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifdef __cplusplus
class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifdef __cplusplus
class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-00C04FBFE08B")
StockLevel;

```

```

#endif /* __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */
/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif

#endif

/*
 * FILE: TPCC.IDL Microsoft TPC-C Kit Ver.
 * 4.20.000 Copyright Microsoft, 1999
 * All Rights Reserved not yet audited
 * PURPOSE: IDL source for TPCC.dll. This file is processed by
the MIDL tool to produce the type library
 * (TPCC.tlb) and marshalling code.
 * change history: 4.20.000 - first version
 */

interface TPCC;
interface NewOrder;
interface OrderStatus;
interface Payment;
interface StockLevel;

import "oaidl.idl";
import "ocidl.idl";
import "..\tpcc_com_ps\src\tpcc_com_ps.idl";

[
    uuid(122A3117-2520-11D3-BA71-00C04FBFE08B),
    version(1.0),
    helpstring("TPC-C 1.0 Type Library")
]
library TPCCLib
{
    importlib("stdole32.tlb");
    importlib("stdole2.tlb");

    [
        uuid(122A3128-2520-11D3-BA71-00C04FBFE08B),
        helpstring("All Txns Class")
    ]
    coclass TPCC
    {
        [default] interface ITPCC;
    };

    [
        uuid(975BAABF-84A7-11D2-BA47-00C04FBFE08B),
        helpstring("NewOrder Class")
    ]
    coclass NewOrder
    {
        [default] interface ITPCC;
    };

    [
        uuid(266836AD-A50D-11D2-BA4E-00C04FBFE08B),
        helpstring("OrderStatus Class")
    ]
    coclass OrderStatus
    {
        [default] interface ITPCC;
    };

    [
        uuid(CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B),
        helpstring("Payment Class")
    ]
    coclass Payment
    {
        [default] interface ITPCC;
    };

    [
        uuid(2668369E-A50D-11D2-BA4E-00C04FBFE08B),
        helpstring("StockLevel Class")
    ]
    coclass StockLevel
    {
        [default] interface ITPCC;
    };
};

```

tpcc_com_all/src/tpcc_com_all.idl


```

#endif // __IID_DEFINED__

#ifdef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
const type name = {w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif !MIDL_USE_GUIDDEF

MIDL_DEFINE_GUID(IID,
L18ID_TPCCClsb,0x122a3117,0x2520,0x11d3,0xba,0x71,0x00,0xc0,0x4f,0xbf,0xe0,0x8b);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122a3128,0x2520,0x11d3,0xba,0x71,0x00,0xc0,0x4f,0xbf,0xe0,0x8b);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975baabf,0x84a7,0x11d2,0xba,0x47,0x00,0xc0,0x4f,0xbf,0xe0,0x8b);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836ad,0xa50d,0x11d2,0xba,0x4e,0x00,0xc0,0x4f,0xbf,0xe0,0x8b);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xcd02f7ef,0xa4fa,0x11d2,0xba,0x4e,0x00,0xc0,0x4f,0xbf,0xe0,0x8b);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369e,0xa50d,0x11d2,0xba,0x4e,0x00,0xc0,0x4f,0xbf,0xe0,0x8b);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(C_MIA64) || defined(C_M_AXP64) */

```

tpcc_com_all/src/tpcc_com_no.rgs

```

HKCR
{
    TPCC.NewOrder.1 = s 'NewOrder Class'
    {
        CLSID = s '{975baabf-84a7-11d2-ba47-00c04fbfe08b}'
    }
    TPCC.NewOrder = s 'NewOrder Class'
    {
        CurVer = s 'TPCC.NewOrder.1'
    }
    NoRemove CLSID
    {
        ForceRemove {975baabf-84a7-11d2-ba47-00c04fbfe08b} =
        {
            ProgID = s 'TPCC.NewOrder.1'
            VersionIndependentProgID = s
        }
    }
    'TPCC.NewOrder'
    {
        InprocServer32 = s '%MODULE%'
        {
            val ThreadingModel = s
        }
    }
    'Both'
    {
    }
}

```

tpcc_com_all/src/tpcc_com_os.rgs

```

HKCR
{
    TPCC.OrderStatus.1 = s 'OrderStatus Class'
    {
        CLSID = s '{266836ad-a50d-11d2-ba4e-00c04fbfe08b}'
    }
    TPCC.OrderStatus = s 'OrderStatus Class'
    {
        CurVer = s 'TPCC.OrderStatus.1'
    }
    NoRemove CLSID
    {
        ForceRemove {266836ad-a50d-11d2-ba4e-00c04fbfe08b} =
        {
            ProgID = s 'TPCC.OrderStatus.1'
            VersionIndependentProgID = s
        }
    }
    'TPCC.OrderStatus'
    {
        InprocServer32 = s '%MODULE%'
        {
            val ThreadingModel = s
        }
    }
    'Both'
    {
    }
}

```

tpcc_com_all/src/tpcc_com_pay.rgs

```

HKCR
{
    TPCC.Payment.1 = s 'Payment Class'
    {
        CLSID = s '{cd02f7ef-a4fa-11d2-ba4e-00c04fbfe08b}'
    }
    TPCC.Payment = s 'Payment Class'
    {
        CurVer = s 'TPCC.Payment.1'
    }
    NoRemove CLSID
    {
        ForceRemove {cd02f7ef-a4fa-11d2-ba4e-00c04fbfe08b} =
        {
            ProgID = s 'TPCC.Payment.1'
            VersionIndependentProgID = s
        }
    }
    'TPCC.Payment'
    {
        InprocServer32 = s '%MODULE%'
        {
            val ThreadingModel = s
        }
    }
    'Both'
    {
    }
}

```

tpcc_com_all/src/tpcc_com_ps.h

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001 */
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=12), w1, 2p8, env=win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds check enum stub_data
VC _declspec() decoration level:
#define __declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough to compile this file*/
#ifdef _REQUIRED_RPCNDR_H_VERSION__
#define _REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifdef _RPCNDR_H_VERSION__
#error this stub requires an updated version of <rpcndr.h>
#endif // _RPCNDR_H_VERSION__

#ifdef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /* COM_NO_WINDOWS_H */

#ifdef _tpcc_com_ps_h_
#define _tpcc_com_ps_h_

/* Forward Declarations */

#ifdef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C" {
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

```

```

#ifdef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

EXTERN_C const IID IID_ITPCC;

#if defined(__cplusplus) && !defined(CINTERFACE)
MIDL_INTERFACE("FEE6AA2-84B1-11d2-BA47-00C04FBFE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT STDMETHODCALLTYPE NewOrder(
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE Payment(
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE Delivery(
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE StockLevel(
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE OrderStatus(
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE CallSetComplete( void) = 0;
};
#else /* C style interface */
typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE ) __RPC_FAR *QueryInterface )(
        ITPCC __RPC_FAR * This,
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject);

    ULONG ( STDMETHODCALLTYPE ) __RPC_FAR *AddRef )(
        ITPCC __RPC_FAR * This);

    ULONG ( STDMETHODCALLTYPE ) __RPC_FAR *Release )(
        ITPCC __RPC_FAR * This);

    HRESULT ( STDMETHODCALLTYPE ) __RPC_FAR *NewOrder )(
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE ) __RPC_FAR *Payment )(
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE ) __RPC_FAR *Delivery )(
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE ) __RPC_FAR *StockLevel )(
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE ) __RPC_FAR *OrderStatus )(
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT tx_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE ) __RPC_FAR *CallSetComplete )(
        ITPCC __RPC_FAR * This);

    END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
};

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
(This->lpVtbl->QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
(This->lpVtbl->AddRef(This)

#define ITPCC_Release(This) \
(This->lpVtbl->Release(This)

#define ITPCC_NewOrder(This,tx_in,txn_out) \
(This->lpVtbl->NewOrder(This,tx_in,txn_out)

#define ITPCC_Payment(This,tx_in,txn_out) \
(This->lpVtbl->Payment(This,tx_in,txn_out)

```

```

#define ITPCC_Delivery(This,txn_in,txn_out) \
(This)->lpvtbl -> Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
(This)->lpvtbl -> StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
(This)->lpvtbl -> OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
(This)->lpvtbl -> CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC_RPC_FAR * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */
unsigned long __RPC_USER VARIANT_UserSize( unsigned long
__RPC_FAR *, unsigned long __RPC_USER VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserMarshal( unsigned long
__RPC_FAR *, unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserUnmarshal( unsigned long
__RPC_FAR *, unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
void __RPC_USER VARIANT_UserFree( unsigned long
__RPC_FAR *, VARIANT __RPC_FAR * );

```

```

#ifdef __cplusplus
}
#endif
#endif

tpcc_com_all/src/tpcc_com_sl.rgs
HKCR
{
    TPCC.StockLevel.1 = s 'StockLevel Class'
    {
        CLSID = s '{2668369E-A50D-11D2-BA4E-00C04FBE08B}'
    }
    TPCC.StockLevel = s 'StockLevel Class'
    {
        CurVer = s 'TPCC.StockLevel.1'
    }
    NRemove CLSID
    {
        ForceRemove {2668369E-A50D-11D2-BA4E-00C04FBE08B} =
s 'StockLevel Class'
        {
            ProgID = s 'TPCC.StockLevel.1'
            VersionIndependentProgID = s
'TPCC.StockLevel'
            InprocServer32 = s '%MODULE%'
            {
                val ThreadingModel = s
'Both'
            }
        }
    }
}

tpcc_com_ps/tpcc_com_ps.dsp
# Microsoft Developer Studio Project File - Name="tpcc_com_ps" - Package
Owner=<4>
# Microsoft Developer Studio Generated Build File, Format version 6.00
# ** DO NOT EDIT **

# TARGETTYPE "win32 (x86) Application" 0x0101

CFG=tpcc_com_ps - win32 Debug
!MESSAGE This is not a valid makefile. To build this project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_ps.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running NMAKE
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_ps.mak" CFG="tpcc_com_ps - win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc_com_ps - win32 Release" (based on "win32 (x86) Application")
!MESSAGE "tpcc_com_ps - win32 Debug" (based on "win32 (x86) Application")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPPcl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "tpcc_com_ps - win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /w3 /gx /o2 /d "WIN32" /d "NDEBUG" /d "_WINDOWS" /YX /FD
/c
# ADD CPP /nologo /w3 /gx /o2 /d "WIN32" /d "NDEBUG" /d "_WIN32_WINNT=0x0400" /D
"REGISTER_PROXY_DLL" /FD /C
# SUBTRACT CPP /YX
# ADD BASE MTL /nologo /d "NDEBUG" /mktyp11b203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kerne132.lib user32.lib gdi32.lib winspool.lib cmdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbc32.lib odbccp32.lib /nologo /subsystem:windows /machine:I386

```

```

# ADD LINK32 kernel32.lib rpcndr.lib rpcns4.lib rpcrt4.lib oleaut32.lib uuid.lib
/nologo /entry:"D11Main" /subsystem:windows /d11 /pdb:none

/machine:I386 /def:".src\tpcc_com_ps.def"
# Begin Custom Build - Copying tpcc_com_ps.h
InputPath=. \bin\tpcc_com_ps.d11
SOURCE=$(InputPath)

".\tpcc_com_all\src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
copy .\src\tpcc_com_ps.h .\tpcc_com_all\src\

# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_ps - win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /w3 /gm /Gx /Zi /od /d "WIN32" /d "_DEBUG" /d "_WINDOWS"
/YX /FD /C
# ADD CPP /nologo /ZI /od /d "WIN32" /d "_DEBUG" /d "_WIN32_WINNT=0x0400" /D
"REGISTER_PROXY_DLL" /FD /C
# ADD BASE MTL /nologo /d "_DEBUG" /mktyp11b203 /o "NUL" /win32
# ADD MTL /nologo /d "_DEBUG" /mktyp11b203 /o "NUL" /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kerne132.lib user32.lib gdi32.lib winspool.lib cmdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib

odbc32.lib odbccp32.lib /nologo /subsystem:windows /debug /machine:I386
/pdbtype:sept

# ADD LINK32 kernel32.lib rpcndr.lib rpcns4.lib rpcrt4.lib oleaut32.lib uuid.lib
/nologo /entry:"D11Main" /d11 /debug /machine:I386

/def:".src\tpcc_com_ps.def" /pdbtype:sept
# SUBTRACT LINK32 /pdb:none
# Begin Custom Build - Copying tpcc_com_ps.h
InputPath=. \bin\tpcc_com_ps.d11
SOURCE=$(InputPath)

".\tpcc_com_all\src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
copy .\src\tpcc_com_ps.h .\tpcc_com_all\src\

# End Custom Build

!ENDIF

# Begin Target

# Name "tpcc_com_ps - win32 Release"
# Name "tpcc_com_ps - win32 Debug"
# Begin Group "Source"

# PROP Default_Filter ""
# Begin Source File

SOURCE=. \src\d11data.c
# End Source File
# Begin Source File

SOURCE=. \src\tpcc_com_ps.def
# PROP Exclude_From_Build 1
# End Source File
# Begin Source File

SOURCE=. \src\tpcc_com_ps.idl

!IF "$(CFG)" == "tpcc_com_ps - win32 Release"

# PROP Ignore_Default_Tool 1
# Begin Custom Build
InputPath=. \src\tpcc_com_ps.idl

BuildCmds= \
midl /oicf /h "tpcc_com_ps.h" /iid "tpcc_com_ps_i.c"
".\src\tpcc_com_ps.idl" /out ".\src"

".\src\tpcc_com_ps_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

".\src\d11data.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)

".\src\tpcc_com_ps.p.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmds)
# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_ps - win32 Debug"

# PROP Ignore_Default_Tool 1
# Begin Custom Build
InputPath=. \src\tpcc_com_ps.idl

BuildCmds= \
midl /oicf /h "tpcc_com_ps.h" /iid "tpcc_com_ps_i.c"
".\src\tpcc_com_ps.idl" /out ".\src"

```

```

"\src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmnds)

"\src\tpcc_com_ps_i.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmnds)

"\src\dlldata.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmnds)

"\src\tpcc_com_ps_p.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$(BuildCmnds)
# End Custom Build

!ENDIF

# End Source File
# Begin Source File

SOURCE=\src\tpcc_com_ps_i.c
# End Source File
# Begin Source File

SOURCE=\src\tpcc_com_ps_p.c
# End Source File
# End Group
# End Target
# End Project

```

tpcc_com_ps/src/dlldata.c

```

/*****
DLLData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file compile.

To completely reconstruct this file, delete it and rerun MIDL
on all the IDL files in this DLL, specifying this file for the
/dlldata command line option

*****/

#include <rpcproxy.h>

#ifdef _cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

#ifdef _cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */

```

tpcc_com_ps/src/tpcc_com_ps.def

```

LIBRARY "tpcc_com_ps"
DESCRIPTION 'Proxy/Stub DLL'

EXPORTS
    dllGetClassObject @1 PRIVATE
    dllCanUnloadNow @2 PRIVATE
    GetProxyDllInfo @3 PRIVATE
    dllRegistersServer @4 PRIVATE
    dllUnregistersServer @5 PRIVATE

```

tpcc_com_ps/src/tpcc_com_ps.h

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001 */
/* Compiler settings for .\src\tpcc_com_ps.idl:
    Oicf (OptLev=12), W1, Zp8, env=win32 (32b run), ms_ext, c_ext
    error_checks: allocation ref bounds_check enum stub_data
    VC_declspec() decoration level:

```

```

__declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
//@@MIDL_FILE_HEADING( )

/* verify that the <rpcndr.h> version is high enough to compile this file*/
#ifndef _REQUIRED_RPCNDR_H_VERSION_
#define _REQUIRED_RPCNDR_H_VERSION_ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef _RPCNDR_H_VERSION_
#error this stub requires an updated version of <rpcndr.h>
#endif // _RPCNDR_H_VERSION_

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef tpcc_com_ps_h_
#define tpcc_com_ps_h_

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef _cplusplus
extern "C" {
#endif

void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */

extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE __MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object] */

EXTERN_C const IID IID_ITPCC;

#if defined(_cplusplus) && !defined(CINTERFACE)
MIDL_INTERFACE("FEE6AA2-84B1-11d2-BA47-00C04FBE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT STDMETHODCALLTYPE NewOrder(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE Payment(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE Delivery(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE StockLevel(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE OrderStatus(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out) = 0;

    virtual HRESULT STDMETHODCALLTYPE CallSetComplete( void ) = 0;
};
#else /* C style interface */
typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *QueryInterface )(
        ITPCC __RPC_FAR * This,
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject);

    ULONG ( STDMETHODCALLTYPE __RPC_FAR *AddRef )(
        ITPCC __RPC_FAR * This);

    ULONG ( STDMETHODCALLTYPE __RPC_FAR *Release )(
        ITPCC __RPC_FAR * This);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *NewOrder )(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Payment )(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Delivery )(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *StockLevel )(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *OrderStatus )(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE __RPC_FAR *CallSetComplete )(
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
};

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This->lpVtbl->QueryInterface(This,riid,ppvObject))

#define ITPCC_AddRef(This) \
    (This->lpVtbl->AddRef(This))

#define ITPCC_Release(This) \
    (This->lpVtbl->Release(This))

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This->lpVtbl->NewOrder(This,txn_in,txn_out))

#define ITPCC_Payment(This,txn_in,txn_out) \
    (This->lpVtbl->Payment(This,txn_in,txn_out))

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This->lpVtbl->Delivery(This,txn_in,txn_out))

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This->lpVtbl->StockLevel(This,txn_in,txn_out))

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This->lpVtbl->OrderStatus(This,txn_in,txn_out))

#define ITPCC_CallSetComplete(This) \
    (This->lpVtbl->CallSetComplete(This))

#endif /* COBJMACROS */

#endif /* C style interface */

```

```

/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Payment )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( STDMETHODCALLTYPE __RPC_FAR *Delivery )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( STDMETHODCALLTYPE __RPC_FAR *StockLevel )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( STDMETHODCALLTYPE __RPC_FAR *OrderStatus )(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

HRESULT ( STDMETHODCALLTYPE __RPC_FAR *CallSetComplete )(
    ITPCC __RPC_FAR * This);

END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
};

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This->lpVtbl->QueryInterface(This,riid,ppvObject))

#define ITPCC_AddRef(This) \
    (This->lpVtbl->AddRef(This))

#define ITPCC_Release(This) \
    (This->lpVtbl->Release(This))

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This->lpVtbl->NewOrder(This,txn_in,txn_out))

#define ITPCC_Payment(This,txn_in,txn_out) \
    (This->lpVtbl->Payment(This,txn_in,txn_out))

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This->lpVtbl->Delivery(This,txn_in,txn_out))

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This->lpVtbl->StockLevel(This,txn_in,txn_out))

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This->lpVtbl->OrderStatus(This,txn_in,txn_out))

#define ITPCC_CallSetComplete(This) \
    (This->lpVtbl->CallSetComplete(This))

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT STDMETHODCALLTYPE ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Payment_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Delivery_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

```

```

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC_RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC_RPC_FAR * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long __RPC_USER VARIANT_UserSize( unsigned long
__RPC_FAR * , unsigned long __RPC_USER , VARIANT __RPC_FAR * );
unsigned char __RPC_USER VARIANT_UserMarshal( unsigned long
__RPC_FAR * , unsigned char __RPC_FAR * , VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER VARIANT_UserUnmarshal( unsigned long
__RPC_FAR * , unsigned char __RPC_FAR * , VARIANT __RPC_FAR * );
void __RPC_USER VARIANT_UserFree( unsigned long
__RPC_FAR * , VARIANT __RPC_FAR * );

/* end of Additional Prototypes */

#ifdef __cplusplus
}
#endif
#endif

```

tpcc_com_ps/src/tpcc_com_ps.idl

```

/* FILE: ITPCC.IDL Microsoft TPC-C Kit ver.
4.20.000 Copyright Microsoft, 1999
* All Rights Reserved
* not yet audited
* PURPOSE: Defines the interface used by TPCC. This interface
can be implemented by C++ components.
* Change history: 4.20.000 - first version
*/

// Forward declare all types defined
interface ITPCC;
import "oidl.idl";
import "ocidl.idl";

[
    object,
    oleautomation,
    uuid(FE6E6AA2-8481-11d2-BA47-00C04FBFE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
interface ITPCC : IUnknown
{
    HRESULT __stdcall NewOrder(
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
    HRESULT __stdcall Payment

```

```

(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall Delivery(
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
HRESULT __stdcall StockLevel(
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
HRESULT __stdcall OrderStatus(
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
HRESULT __stdcall CallSetComplete(
    (
        );
);
}; // interface ITPCC

```

tpcc_com_ps/src/tpcc_com_ps_i.c

```

#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */
/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=12), w1, 2p8, env=win32 (32b run), ms_ext, c_ext
error checks: allocation ref bounds_check enum stub_data
VC __declspec( decoration level:
__declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE())
*/
//@@MIDL_FILE_HEADING( )

#ifdef __cplusplus
extern "C" {
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif // !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEE6AA2,0x8481,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64) */

```

```

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif // !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEE6AA2,0x8481,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64) */

#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the IIDs and CLSIDs */
/* link this file in with the server and any clients */

/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLev=12), w1, 2p8, env=win64 (32b run,appending), ms_ext, c_ext,
robust
error checks: allocation ref bounds_check enum stub_data
VC __declspec( decoration level:
__declspec(uuid()), __declspec(selectany), __declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE())
*/
//@@MIDL_FILE_HEADING( )

#ifdef __cplusplus
extern "C" {
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8) \
    const type name = {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#endif // !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEE6AA2,0x8481,0x11d2,0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AXP64) */

```



```

#else
size/offset = 8 */
#endif
#else
Stack size/offset = 8 */
#endif
/* 54 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */
/* Parameter txn_out */
/* 56 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple_ref, srv alloc size=16 */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#endif
#endif
#endif
Stack size/offset = 24 */
#endif
#else
size/offset = 24 */
#endif
Stack size/offset = 24 */
#endif
/* 60 */ NdrFcShort( 0x3da ), /* Type Offset=986 */
/* Return value */
/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#endif
#endif
#endif
Stack size/offset = 28 */
#endif
#else
size/offset = 28 */
#endif
Stack size/offset = 32 */
#endif
/* 66 */ 0x8, /* FC_LONG */
/* 0 */
/* Procedure delivery */
/* 68 */ 0x33, /* FC_AUTO_HANDLE */
/* Old Flags:
object, 0i2 */
/* 70 */ NdrFCLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#endif
#endif
#endif
Stack size/offset = 32 */
#endif
#else
size/offset = 32 */
#endif
Stack size/offset = 40 */
#endif
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* 0i2 Flags: srv must size, clt must
size, has return, */
/* Parameter txn_in */
/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by
val, */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#endif
#endif
#endif
Stack size/offset = 8 */
#endif
#else
size/offset = 8 */
#endif
Stack size/offset = 8 */
#endif
/* 88 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */
/* Parameter txn_out */
/* 90 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple_ref, srv alloc size=16 */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#endif
#endif
#endif
Stack size/offset = 24 */
#endif
#else
size/offset = 24 */
#endif
Stack size/offset = 24 */
#endif
/* 94 */ NdrFcShort( 0x3da ), /* Type Offset=986 */
/* Return value */
/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#endif
#endif
#endif
Stack size/offset = 28 */
#endif
#else
size/offset = 28 */
#endif
Stack size/offset = 28 */
#endif
/* 100 */ 0x8, /* FC_LONG */
/* 0 */
/* Procedure StockLevel */
/* 102 */ 0x33, /* FC_AUTO_HANDLE */
/* Old Flags:
object, 0i2 */
/* 104 */ NdrFCLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#endif
#endif
#endif
Stack size/offset = 32 */
#endif
#else
size/offset = 32 */
#endif
Stack size/offset = 40 */
#endif
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* 0i2 Flags: srv must size, clt must
size, has return, */
/* Parameter txn_in */
/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by
val, */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#endif
#endif
#endif
Stack size/offset = 8 */
#endif
#else
size/offset = 8 */
#endif
Stack size/offset = 8 */
#endif
/* 122 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */
/* Parameter txn_out */
/* 124 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple_ref, srv alloc size=16 */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#endif
#endif
#endif
Stack size/offset = 24 */
#endif
#else
size/offset = 24 */
#endif
Stack size/offset = 24 */
#endif
/* 128 */ NdrFcShort( 0x3da ), /* Type Offset=986 */
/* Return value */
/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#endif
#endif
#endif
Stack size/offset = 28 */
#endif
#else
size/offset = 28 */
#endif
Stack size/offset = 32 */
#endif
/* 134 */ 0x8, /* FC_LONG */
/* 0 */
/* Procedure OrderStatus */
/* 136 */ 0x33, /* FC_AUTO_HANDLE */
/* Old Flags:
object, 0i2 */
/* 138 */ NdrFCLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack size/offset = 28 */
#endif
#endif
#endif
Stack size/offset = 32 */
#endif
#else
size/offset = 32 */
#endif
Stack size/offset = 40 */
#endif
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7, /* 0i2 Flags: srv must size, clt must
size, has return, */
/* Parameter txn_in */
/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size, must free, in, by
val, */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack size/offset = 4 */
#endif
#endif
#endif
Stack size/offset = 8 */
#endif
#else
size/offset = 8 */
#endif
Stack size/offset = 8 */
#endif
/* 156 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */
/* Parameter txn_out */
/* 158 */ NdrFcShort( 0x4113 ), /* Flags: must size, must free, out,
simple_ref, srv alloc size=16 */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack size/offset = 20 */
#endif
#endif
#endif
Stack size/offset = 24 */
#endif
#else
size/offset = 24 */
#endif
Stack size/offset = 28 */
#endif
/* 164 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#ifndef ALPHA
#ifndef PPC
#ifdef defined(_MIPS_)
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack size/offset = 24 */
#endif
#endif
#endif
Stack size/offset = 32 */
#endif
#endif

```

```

/* 168 */ OX8, /* FC_LONG */ /* 0 */
/* Procedure CallSetComplete */
/* 170 */ OX33, /* FC_AUTO_HANDLE */ /* Old Flags:
object, oi2 */
/* 172 */ NdrFCLong( 0x0 ), /* 0 */
/* 176 */ NdrFCShort( 0x8 ), /* 8 */
#ifdef _ALPHA
/* 178 */ NdrFCShort( 0x8 ), /* x86, MIPS, PPC Stack size/offset = 8
#else
NdrFCShort( 0x10 ), /* Alpha
Stack size/offset = 16 */
#endif
/* 180 */ NdrFCShort( 0x0 ), /* 0 */
/* 182 */ NdrFCShort( 0x8 ), /* 8 */
/* 184 */ OX4, /* OI2 Flags: has return, */ /* 1 */
/* Return value */
/* 186 */ NdrFCShort( 0x70 ), /* Flags: out, return, base type, */
#ifdef _ALPHA
/* 188 */ NdrFCShort( 0x4 ), /* x86, MIPS, PPC Stack size/offset = 4
#else
NdrFCShort( 0x8 ), /* Alpha
Stack size/offset = 8 */
#endif
/* 190 */ OX8, /* FC_LONG */ /* 0 */
OX0, /* 0 */
};
static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
0,
NdrFCShort( 0x0 ), /* 0 */
/* 2 */ OX12, OX0, /* FC_UP */
/* 4 */ NdrFCShort( 0x3B0 ), /* OffSet= 944 (948) */
/* 6 */ OX2b, /*
FC_NON_ENCAPSULATED_UNION */
OX9, /* FC_ULONG
/* 8 */ OX7, /* Corr desc: FC_USHORT */
OX0, /* 8 */
NdrFCShort( 0xffff8 ), /* OffSet= 2 (14) */
/* 12 */ NdrFCShort( 0x2 ), /* 16 */
/* 14 */ NdrFCShort( 0x10 ), /* 43 */
/* 16 */ NdrFCShort( 0x2 ), /* 3 */
/* 18 */ NdrFCShort( 0x3 ), /* Simple arm type: FC_LONG */
/* 22 */ NdrFCShort( 0x8008 ), /* 17 */
/* 24 */ NdrFCLong( 0x11 ), /* Simple arm type: FC_BYTE */
/* 28 */ NdrFCShort( 0x8001 ), /* 2 */
/* 30 */ NdrFCLong( 0x2 ), /* Simple arm type: FC_SHORT */
/* 34 */ NdrFCShort( 0x8006 ), /* 4 */
/* 36 */ NdrFCLong( 0x4 ), /* Simple arm type: FC_FLOAT */
/* 40 */ NdrFCShort( 0x800a ), /* 5 */
/* 42 */ NdrFCLong( 0x5 ), /* Simple arm type: FC_DOUBLE */
/* 46 */ NdrFCShort( 0x800c ), /* 11 */
/* 48 */ NdrFCLong( 0xb ), /* Simple arm type: FC_SHORT */
/* 52 */ NdrFCShort( 0x8006 ), /* 10 */
/* 54 */ NdrFCLong( 0xa ), /* Simple arm type: FC_LONG */
/* 58 */ NdrFCShort( 0x8008 ), /* 6 */
/* 60 */ NdrFCLong( 0x6 ), /* OffSet= 214 (278) */
/* 64 */ NdrFCShort( 0x6 ), /* 7 */
/* 66 */ NdrFCLong( 0x7 ), /* Simple arm type: FC_DOUBLE */
/* 70 */ NdrFCShort( 0x800c ), /* 8 */
/* 72 */ NdrFCLong( 0x8 ), /* OffSet= 208 (284) */
/* 76 */ NdrFCShort( 0xd0 ), /* 13 */
/* 78 */ NdrFCLong( 0xd ), /* OffSet= 226 (308) */
/* 82 */ NdrFCShort( 0xe2 ), /* 9 */
/* 84 */ NdrFCLong( 0x9 ), /* OffSet= 238 (326) */
/* 88 */ NdrFCShort( 0xee ), /* 8192 */
/* 90 */ NdrFCLong( 0x2000 ), /* OffSet= 250 (344) */
/* 94 */ NdrFCShort( 0xfa ), /* 36 */
/* 96 */ NdrFCLong( 0x24 ), /* OffSet= 776 (876) */
/* 100 */ NdrFCShort( 0x30 ), /* 16420 */
/* 102 */ NdrFCLong( 0x4024 ), /* OffSet= 770 (876) */
/* 106 */ NdrFCShort( 0x302 ), /* 16401 */
/* 108 */ NdrFCLong( 0x4011 ), /* OffSet= 768 (880) */
/* 112 */ NdrFCShort( 0x300 ), /* 16386 */
/* 114 */ NdrFCLong( 0x4002 ), /* OffSet= 766 (884) */
/* 118 */ NdrFCShort( 0x2fe ), /* 16387 */
/* 120 */ NdrFCLong( 0x4003 ), /* OffSet= 764 (888) */
/* 124 */ NdrFCShort( 0x2fc ), /* 16388 */
/* 126 */ NdrFCLong( 0x4004 ), /* OffSet= 762 (892) */
/* 130 */ NdrFCShort( 0x2fa ), /* 16389 */
/* 132 */ NdrFCLong( 0x4007 ), /* OffSet= 760 (896) */
/* 136 */ NdrFCShort( 0x2f8 ), /* 16395 */
/* 138 */ NdrFCLong( 0x400b ), /* OffSet= 742 (884) */
/* 142 */ NdrFCShort( 0x2e6 ), /* 16394 */
/* 144 */ NdrFCLong( 0x400a ), /* OffSet= 740 (888) */
/* 148 */ NdrFCShort( 0x2e4 ), /* 16390 */
/* 150 */ NdrFCLong( 0x4006 ), /* OffSet= 746 (900) */
/* 154 */ NdrFCShort( 0x2ea ), /* 16391 */
/* 156 */ NdrFCLong( 0x4007 ), /* OffSet= 736 (896) */
/* 160 */ NdrFCShort( 0x2e0 ), /* 16392 */
/* 162 */ NdrFCLong( 0x4008 ), /* OffSet= 738 (904) */
/* 166 */ NdrFCShort( 0x2e2 ), /* 16397 */
/* 168 */ NdrFCLong( 0x4009 ), /* OffSet= 736 (908) */
/* 172 */ NdrFCShort( 0x2d0 ), /* 16393 */
/* 174 */ NdrFCLong( 0x400d ), /* OffSet= 734 (912) */
/* 178 */ NdrFCShort( 0x2de ),
/* 180 */ NdrFCLong( 0x6000 ), /* 24576 */
/* 184 */ NdrFCShort( 0x2dc ), /* OffSet= 732 (916) */
/* 186 */ NdrFCLong( 0x400c ), /* 16396 */
/* 190 */ NdrFCShort( 0x2da ), /* OffSet= 730 (920) */
/* 192 */ NdrFCLong( 0x10 ), /* 16 */
/* 196 */ NdrFCShort( 0x8002 ), /* Simple arm type: FC_CHAR */
/* 198 */ NdrFCLong( 0x12 ), /* 18 */
/* 202 */ NdrFCShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 204 */ NdrFCLong( 0x13 ), /* 19 */
/* 208 */ NdrFCShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 210 */ NdrFCLong( 0x16 ), /* 22 */
/* 214 */ NdrFCShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 216 */ NdrFCLong( 0x17 ), /* 23 */
/* 220 */ NdrFCShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 222 */ NdrFCLong( 0x12 ), /* 18 */
/* 226 */ NdrFCShort( 0x2be ), /* OffSet= 702 (928) */
/* 228 */ NdrFCLong( 0x400e ), /* 16398 */
/* 232 */ NdrFCShort( 0x2c4 ), /* OffSet= 708 (940) */
/* 234 */ NdrFCLong( 0x4010 ), /* 16400 */
/* 238 */ NdrFCShort( 0x2c2 ), /* OffSet= 706 (944) */
/* 240 */ NdrFCLong( 0x4012 ), /* 16402 */
/* 244 */ NdrFCShort( 0x280 ), /* OffSet= 640 (884) */
/* 246 */ NdrFCLong( 0x4013 ), /* 16403 */
/* 250 */ NdrFCShort( 0x27e ), /* OffSet= 638 (888) */
/* 252 */ NdrFCLong( 0x4016 ), /* 16406 */
/* 256 */ NdrFCShort( 0x278 ), /* OffSet= 632 (888) */
/* 258 */ NdrFCLong( 0x4017 ), /* 16407 */
/* 262 */ NdrFCShort( 0x272 ), /* OffSet= 626 (888) */
/* 264 */ NdrFCLong( 0x0 ), /* 0 */
/* 268 */ NdrFCShort( 0x0 ), /* OffSet= 0 (268) */
/* 270 */ NdrFCLong( 0x1 ), /* 1 */
/* 274 */ NdrFCShort( 0x0 ), /* OffSet= 0 (274) */
/* 276 */ NdrFCShort( 0xfffffff ), /* OffSet= -1 (275) */
/* 278 */
OX15, /* FC_STRUCTURE
OX7, /* 7 */
OXb, /* FC_HYPER */
OX5b, /* FC_END */
OX12, OX0, /* FC_UP */
/* OffSet= 12 (298) */
OX1b, /* FC_CARRAY
OX1, /* 1 */
/* Corr desc: FC_ULONG */
OX0, /*
/* 290 */ NdrFCShort( 0x2 ), /* 2 */
/* 292 */ OX9, /* Corr desc: FC_ULONG */
/* 294 */ NdrFCShort( 0xffffc ), /* -4 */
/* 296 */ OX6, /* FC_SHORT */
/* 298 */ OX5b, /* FC_END */
OX17, /* FC_CSTRUCT
OX3, /* 3 */
/* 300 */ NdrFCShort( 0x8 ), /* 8 */
/* 302 */ NdrFCShort( 0xfffffff2 ), /* OffSet= -14 (288) */
/* 304 */ OX8, /* FC_LONG */
/* 306 */ OX5c, /* FC_PAD */
/* 308 */ OX5b, /* FC_END */
OX2f, /* FC_IP */
OX5a,
/* 310 */ NdrFCLong( 0x0 ), /* 0 */
/* 314 */ NdrFCShort( 0x0 ), /* 0 */
/* 316 */ NdrFCShort( 0x0 ), /* 0 */
/* 318 */ OXC0, /* 192 */
OX0, /* 0 */
OX0, /* 0 */
OX0, /* 0 */
OX46, /* 70 */
OX2f, /* FC_IP */
OX5a,
/* 328 */ NdrFCLong( 0x20400 ), /* 132096 */
/* 332 */ NdrFCShort( 0x0 ), /* 0 */
/* 334 */ NdrFCShort( 0x0 ), /* 0 */
/* 336 */ OXC0, /* 192 */
OX0, /* 0 */
OX0, /* 0 */
OX0, /* 0 */
OX0, /* 0 */
OX46, /* 70 */
OX12, OX10, /* FC_UP [pointer_deref]
/* 346 */ NdrFCShort( 0x2 ), /* OffSet= 2 (348) */
/* 348 */
OX12, OX0, /* FC_UP */
/* OffSet= 508 (858) */
OX2a, /*
OX49, /* 73 */
/* 354 */ NdrFCShort( 0x18 ), /* 24 */
/* 356 */ NdrFCShort( 0xa ), /* 10 */
/* 358 */ NdrFCLong( 0x8 ), /* 8 */
/* 362 */ NdrFCShort( 0x58 ), /* OffSet= 88 (450) */
/* 364 */ NdrFCLong( 0xd ), /* 13 */
/* 368 */ NdrFCShort( 0x78 ), /* OffSet= 120 (488) */
/* 370 */ NdrFCLong( 0x9 ), /* 9 */
/* 374 */ NdrFCShort( 0x94 ), /* OffSet= 148 (522) */
/* 376 */ NdrFCLong( 0xc ), /* 12 */
/* 380 */ NdrFCShort( 0xb ), /* OffSet= 188 (568) */
/* 382 */ NdrFCLong( 0x24 ), /* 36 */
/* 386 */ NdrFCShort( 0x114 ), /* OffSet= 276 (662) */
/* 388 */ NdrFCLong( 0x800d ), /* 32781 */
/* 392 */ NdrFCShort( 0x130 ), /* OffSet= 304 (696) */
/* 394 */ NdrFCLong( 0x10 ), /* 16 */
/* 398 */ NdrFCShort( 0x148 ), /* OffSet= 328 (726) */
/* 400 */ NdrFCLong( 0x2 ), /* 2 */
/* 404 */ NdrFCShort( 0x150 ), /* OffSet= 352 (756) */
/* 406 */ NdrFCLong( 0x3 ), /* 3 */
/* 410 */ NdrFCShort( 0x178 ), /* OffSet= 376 (786) */
/* 412 */ NdrFCLong( 0x14 ), /* 20 */
/* 416 */ NdrFCShort( 0x130 ), /* OffSet= 400 (816) */
/* 418 */ NdrFCShort( 0xffffffff ), /* OffSet= -1 (417) */
/* 420 */
OX1b, /* FC_CARRAY
OX3, /* 3 */
/* 422 */ NdrFCShort( 0x4 ), /* 4 */
/* 424 */ OX19, /* Corr desc: field pointer, FC_ULONG
OX0, /* 0 */
OX4b, /* FC_PP */
OX5c, /* FC_PAD */
OX48, /*
FC_VARIABLE_REPEAT */
OX49, /*
FC_FIXED_OFFSET */
/* 432 */ NdrFCShort( 0x4 ), /* 4 */
/* 434 */ NdrFCShort( 0x1 ), /* 0 */
/* 436 */ NdrFCShort( 0x1 ), /* 1 */
/* 438 */ NdrFCShort( 0x0 ), /* 0 */
/* 440 */ NdrFCShort( 0x0 ), /* 0 */
/* 442 */ OX12, OX0, /* FC_UP */
/* 444 */ NdrFCShort( 0xffffffe ), /* OffSet= -146 (298) */
/* 446 */
OX5b, /* FC_END */
OX8, /* FC_LONG */
OX5b, /* FC_END */
OX16, /* FC_PSTRUCT
OX3, /* 3 */
OX4b, /* FC_PP */
OX5c, /* FC_PAD */
OX46, /*
OX5c, /* FC_PAD */
OX11, OX0, /* FC_PP */
NdrFCShort( 0xffffffd4 ), /* OffSet= -44 (420) */
OX5b, /* FC_END */
OX8, /* FC_LONG */
OX5b, /* FC_END */
OX21, /*
OX3, /* 3 */
NdrFCShort( 0x0 ), /* 0 */
/* Corr desc: field pointer, FC_ULONG
OX0, /* 0 */
/* 476 */ NdrFCShort( 0x0 ), /* 0 */
/* 478 */ NdrFCLong( 0xfffffff ), /* -1 */
/* 482 */ OX4c, /* FC_EMBEDDED_COMPLEX */
/* 484 */ NdrFCShort( 0xfffffff50 ), /* OffSet= -176 (308) */
/* 486 */ OX5c, /* FC_PAD */
/* 488 */ OX1a, /*
FC_BOGUS_STRUCT */
OX3, /* 3 */
/* 490 */ NdrFCShort( 0x8 ), /* 8 */
/* 492 */ NdrFCShort( 0x0 ), /* 0 */
/* 494 */ NdrFCShort( 0x6 ), /* OffSet= 6 (500) */
/* 496 */ OX8, /* FC_LONG */
OX36, /* FC_POINTER
OX5c, /* FC_PAD */
OX5b, /* FC_END */
OX11, OX0, /* FC_PP */
/* OffSet= -32 (470) */
OX21, /*
/* 506 */ NdrFCShort( 0x0 ), /* 0 */
/* 508 */ OX19, /* Corr desc: field pointer, FC_ULONG
OX0, /* 0 */
/* 510 */ NdrFCShort( 0x0 ), /* 0 */
/* 512 */ NdrFCLong( 0xfffffff ), /* -1 */
/* 516 */ OX4c, /* FC_EMBEDDED_COMPLEX */
/* 518 */ NdrFCShort( 0xffffffd4 ), /* OffSet= -192 (326) */
/* 520 */ OX5c, /* FC_PAD */
OX5b, /* FC_END */

```

```

/* 522 */
FC_BOGUS_STRUCT */
/* 524 */ NdrFcShort( 0x8 ),
/* 526 */ NdrFcShort( 0x0 ),
/* 528 */ NdrFcShort( 0x6 ),
/* 530 */ 0x8,
/* 532 */ 0x5c,
/* 534 */
/* 536 */ NdrFcShort( 0xffffffff0 ),
/* 538 */
/* 540 */ NdrFcShort( 0x4 ),
/* 542 */ 0x19,
/* 544 */ NdrFcShort( 0x0 ),
/* 546 */
/* 548 */
FC_VARIABLE_REPEAT */
FC_FIXED_OFFSET */
/* 550 */ NdrFcShort( 0x4 ),
/* 552 */ NdrFcShort( 0x0 ),
/* 554 */ NdrFcShort( 0x1 ),
/* 556 */ NdrFcShort( 0x0 ),
/* 558 */ NdrFcShort( 0x0 ),
/* 560 */ 0x12, 0x0, /* FC_UP */
/* 562 */ NdrFcShort( 0x182 ),
/* 564 */
/* 566 */ 0x5c,
/* 568 */
FC_BOGUS_STRUCT */
/* 570 */ NdrFcShort( 0x8 ),
/* 572 */ NdrFcShort( 0x0 ),
/* 574 */ NdrFcShort( 0x6 ),
/* 576 */ 0x8,
/* 578 */ 0x5c,
/* 580 */
/* 582 */ NdrFcShort( 0xffffffffd4 ),
/* 584 */
FC_CONSTANT_IID */
/* 586 */ NdrFcLong( 0x2f ),
/* 590 */ NdrFcShort( 0x0 ),
/* 592 */ NdrFcShort( 0x0 ),
/* 594 */ 0xc0,
/* 596 */ 0x0,
/* 598 */ 0x0,
/* 600 */ 0x0,
/* 602 */
/* 604 */ NdrFcShort( 0x1 ),
/* 606 */ 0x19,
/* 608 */ NdrFcShort( 0x4 ),
/* 610 */ 0x1,
/* 612 */
FC_BOGUS_STRUCT */
/* 614 */ NdrFcShort( 0x10 ),
/* 616 */ NdrFcShort( 0x0 ),
/* 618 */ NdrFcShort( 0xa ),
/* 620 */ 0x8,
/* 622 */ 0x4c,
/* 624 */ NdrFcShort( 0xffffffffd8 ),
/* 626 */ 0x36,
/* 628 */
/* 630 */ NdrFcShort( 0xffffffffe4 ),
/* 632 */
/* 634 */ NdrFcShort( 0x4 ),
/* 636 */ 0x19,
/* 638 */ NdrFcShort( 0x0 ),
0x1a, /* 3 */
0x3, /* 8 */
/* Offset= 6 (534) */
/* FC_LONG */
0x36, /* FC_POINTER */
/* FC_PAD */
0x5b, /* FC_END */
0x11, 0x0, /* FC_RP */
/* Offset= -32 (504) */
0x1b, /* FC_CARRY */
0x3, /* 3 */
/* 4 */
/* Corr desc: field pointer, FC_ULONG */
0x0, /* 0 */
/* 0 */
/* 0 */
0x4b, /* FC_PP */
0x5c, /* FC_PAD */
0x48, /*
0x49, /*
FC_FIXED_OFFSET */
/* 644 */ NdrFcShort( 0x4 ),
/* 646 */ NdrFcShort( 0x0 ),
/* 648 */ NdrFcShort( 0x1 ),
/* 650 */ NdrFcShort( 0x0 ),
/* 652 */ NdrFcShort( 0x0 ),
/* 654 */ 0x12, 0x0, /* FC_UP */
/* 656 */ NdrFcShort( 0xffffffffd4 ),
/* 658 */
/* 660 */ 0x5c,
/* 662 */
FC_BOGUS_STRUCT */
/* 664 */ NdrFcShort( 0x8 ),
/* 666 */ NdrFcShort( 0x0 ),
/* 668 */ NdrFcShort( 0x6 ),
/* 670 */ 0x8,
/* 672 */ 0x5c,
/* 674 */
/* 676 */ NdrFcShort( 0xffffffffd4 ),
/* 678 */
FC_SMFARRAY */
/* 680 */ NdrFcShort( 0x8 ),
/* 682 */ 0x1,
/* 684 */
/* 686 */ NdrFcShort( 0x10 ),
/* 688 */ 0x8,
/* 690 */ 0x6,
FC_EMBEDDED_COMPLEX */
/* 692 */ 0x0,
15 (678) */
/* 696 */
FC_BOGUS_STRUCT */
/* 698 */ NdrFcShort( 0x18 ),
/* 700 */ NdrFcShort( 0x0 ),
/* 702 */ NdrFcShort( 0xa ),
/* 704 */ 0x8,
/* 706 */ 0x4c,
/* 708 */ NdrFcShort( 0xffffffffe8 ),
/* 710 */ 0x5c,
/* 712 */
/* 714 */ NdrFcShort( 0xfffffffff0c ),
/* 716 */
/* 718 */ NdrFcShort( 0x1 ),
/* 720 */ 0x19,
/* 722 */ NdrFcShort( 0x0 ),
/* 724 */ 0x1,
/* 726 */
/* 728 */ NdrFcShort( 0x8 ),
/* 730 */
/* 732 */
FC_NO_REPEAT */
/* 734 */ NdrFcShort( 0x4 ),
/* 736 */ NdrFcShort( 0x4 ),
/* 738 */ 0x12, 0x0, /* FC_UP */
/* 740 */ NdrFcShort( 0xffffffffe8 ),
/* 742 */
/* 744 */ 0x8,
/* 746 */
/* 640 */
0x4b,
0x5c,
/* FC_PP */
/* FC_PAD */
0x48,
0x49,
/* 644 */ NdrFcShort( 0x4 ),
/* 646 */ NdrFcShort( 0x0 ),
/* 648 */ NdrFcShort( 0x1 ),
/* 650 */ NdrFcShort( 0x0 ),
/* 652 */ NdrFcShort( 0x0 ),
/* 654 */ 0x12, 0x0, /* FC_UP */
/* 656 */ NdrFcShort( 0xffffffffd4 ),
/* 658 */
/* 660 */ 0x5c,
/* 662 */
FC_BOGUS_STRUCT */
/* 664 */ NdrFcShort( 0x8 ),
/* 666 */ NdrFcShort( 0x0 ),
/* 668 */ NdrFcShort( 0x6 ),
/* 670 */ 0x8,
/* 672 */ 0x5c,
/* 674 */
/* 676 */ NdrFcShort( 0xffffffffd4 ),
/* 678 */
FC_SMFARRAY */
/* 680 */ NdrFcShort( 0x8 ),
/* 682 */ 0x1,
/* 684 */
/* 686 */ NdrFcShort( 0x10 ),
/* 688 */ 0x8,
/* 690 */ 0x6,
FC_EMBEDDED_COMPLEX */
/* 692 */ 0x0,
15 (678) */
/* 696 */
FC_BOGUS_STRUCT */
/* 698 */ NdrFcShort( 0x18 ),
/* 700 */ NdrFcShort( 0x0 ),
/* 702 */ NdrFcShort( 0xa ),
/* 704 */ 0x8,
/* 706 */ 0x4c,
/* 708 */ NdrFcShort( 0xffffffffe8 ),
/* 710 */ 0x5c,
/* 712 */
/* 714 */ NdrFcShort( 0xfffffffff0c ),
/* 716 */
/* 718 */ NdrFcShort( 0x1 ),
/* 720 */ 0x19,
/* 722 */ NdrFcShort( 0x0 ),
/* 724 */ 0x1,
/* 726 */
/* 728 */ NdrFcShort( 0x8 ),
/* 730 */
/* 732 */
FC_NO_REPEAT */
/* 734 */ NdrFcShort( 0x4 ),
/* 736 */ NdrFcShort( 0x4 ),
/* 738 */ 0x12, 0x0, /* FC_UP */
/* 740 */ NdrFcShort( 0xffffffffe8 ),
/* 742 */
/* 744 */ 0x8,
/* 746 */
/* 748 */ NdrFcShort( 0x2 ),
/* 750 */ 0x19,
/* 752 */ NdrFcShort( 0x0 ),
/* 754 */ 0x6,
/* 756 */
/* 758 */ NdrFcShort( 0x8 ),
/* 760 */
/* 762 */
FC_NO_REPEAT */
/* 764 */ NdrFcShort( 0x4 ),
/* 766 */ NdrFcShort( 0x4 ),
/* 768 */ 0x12, 0x0, /* FC_UP */
/* 770 */ NdrFcShort( 0xfffffffffe8 ),
/* 772 */
/* 774 */ 0x8,
/* 776 */
/* 778 */ NdrFcShort( 0x4 ),
/* 780 */ 0x19,
/* 782 */ NdrFcShort( 0x0 ),
/* 784 */ 0x8,
/* 786 */
/* 788 */ NdrFcShort( 0x8 ),
/* 790 */
/* 792 */
FC_NO_REPEAT */
/* 794 */ NdrFcShort( 0x4 ),
/* 796 */ NdrFcShort( 0x4 ),
/* 798 */ 0x12, 0x0, /* FC_UP */
/* 800 */ NdrFcShort( 0xfffffffffe8 ),
/* 802 */
/* 804 */ 0x8,
/* 806 */
/* 808 */ NdrFcShort( 0x8 ),
/* 810 */ 0x19,
/* 812 */ NdrFcShort( 0x0 ),
/* 814 */ 0xb,
/* 816 */
/* 818 */ NdrFcShort( 0x8 ),
/* 820 */
/* 822 */
FC_NO_REPEAT */
/* 824 */ NdrFcShort( 0x4 ),
/* 826 */ NdrFcShort( 0x4 ),
/* 828 */ 0x12, 0x0, /* FC_UP */
/* 830 */ NdrFcShort( 0xfffffffffe8 ),
/* 832 */
/* 834 */ 0x8,
/* 836 */
/* 838 */ NdrFcShort( 0x8 ),
/* 840 */
/* 842 */ 0x5c,
/* 844 */
/* 846 */ NdrFcShort( 0x8 ),
/* 848 */ 0x7,
0x1, /* 1 */
/* Corr desc: field pointer, FC_ULONG */
0x0, /* 0 */
/* 0 */
/* 0 */
0x5b, /* FC_END */
0x16, /* FC_PSTRUCT */
0x3, /* 3 */
0x4b, /* FC_PP */
0x5c, /* FC_PAD */
0x46, /*
0x46, /*
FC_NO_REPEAT */
/* 764 */ NdrFcShort( 0x4 ),
/* 766 */ NdrFcShort( 0x4 ),
/* 768 */ 0x12, 0x0, /* FC_UP */
/* 770 */ NdrFcShort( 0xfffffffffe8 ),
/* 772 */
/* 774 */ 0x8,
/* 776 */
/* 778 */ NdrFcShort( 0x4 ),
/* 780 */ 0x19,
/* 782 */ NdrFcShort( 0x0 ),
/* 784 */ 0x8,
/* 786 */
/* 788 */ NdrFcShort( 0x8 ),
/* 790 */
/* 792 */
FC_NO_REPEAT */
/* 794 */ NdrFcShort( 0x4 ),
/* 796 */ NdrFcShort( 0x4 ),
/* 798 */ 0x12, 0x0, /* FC_UP */
/* 800 */ NdrFcShort( 0xfffffffffe8 ),
/* 802 */
/* 804 */ 0x8,
/* 806 */
/* 808 */ NdrFcShort( 0x8 ),
/* 810 */ 0x19,
/* 812 */ NdrFcShort( 0x0 ),
/* 814 */ /* FC_HYPER */
/* 816 */
/* 818 */ NdrFcShort( 0x8 ),
/* 820 */
/* 822 */
FC_NO_REPEAT */
/* 824 */ NdrFcShort( 0x4 ),
/* 826 */ NdrFcShort( 0x4 ),
/* 828 */ 0x12, 0x0, /* FC_UP */
/* 830 */ NdrFcShort( 0xfffffffffe8 ),
/* 832 */
/* 834 */ 0x8,
/* 836 */
/* 838 */ NdrFcShort( 0x8 ),
/* 840 */
/* 842 */ 0x5c,
/* 844 */
/* 846 */ NdrFcShort( 0x8 ),
/* 848 */ 0x7,
0x0, /* 0 */
/* Corr desc: FC_USHORT */

```

```

/* 850 */ NdrFcShort( 0xffd8 ), /* -40 */
/* 852 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 0 */
/* 854 */ NdrFcShort( 0xfffffee ), /* Offset= -18 (836) */
/* 856 */ 0x5c, /* FC_PAD */ /* FC_END */
/* 858 */
FC_BOGUS_STRUCT /*
/* 860 */ NdrFcShort( 0x28 ), /* 40 */
/* 862 */ NdrFcShort( 0xfffffee ), /* Offset= -18 (844) */
/* 864 */ NdrFcShort( 0x0 ), /* Offset= 0 (864) */
/* 866 */ 0x6, /* FC_SHORT
*/
/* 868 */ 0x38, /* FC_ALIGNM4 */
/* 870 */ 0x8, /* FC_LONG */
FC_EMBEDDED_COMPLEX /*
/* 872 */ 0x0, /* FC_LONG */
521 (352) /*
/* 876 */
/* 878 */ NdrFcShort( 0xfffffef6 ), /* Offset= -266 (612) */
/* 880 */
0x12, 0x8, /* FC_UP [simple_pointer]
*/
/* 882 */ 0x1, /* FC_BYTE */
/* 884 */ 0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer]
*/
/* 886 */ 0x6, /* FC_SHORT */
/* 888 */ 0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer]
*/
/* 890 */ 0x8, /* FC_LONG */
/* 892 */ 0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer]
*/
/* 894 */ 0xa, /* FC_FLOAT */
/* 896 */ 0x5c, /* FC_PAD */
0x12, 0x8, /* FC_UP [simple_pointer]
*/
/* 898 */ 0xc, /* FC_DOUBLE */
/* 900 */ 0x5c, /* FC_PAD */
/* 902 */ NdrFcShort( 0xfffffd90 ), /* Offset= -624 (278) */
/* 904 */
0x12, 0x10, /* FC_UP [pointer_deref]
*/
/* 906 */ NdrFcShort( 0xfffffd92 ), /* Offset= -622 (284) */
/* 908 */
0x12, 0x10, /* FC_UP [pointer_deref]
*/
/* 910 */ NdrFcShort( 0xffffda6 ), /* Offset= -602 (308) */
/* 912 */
0x12, 0x10, /* FC_UP [pointer_deref]
*/
/* 914 */ NdrFcShort( 0xffffdb4 ), /* Offset= -588 (326) */
/* 916 */
0x12, 0x10, /* FC_UP [pointer_deref]
*/
/* 918 */ NdrFcShort( 0xffffdc2 ), /* Offset= -574 (344) */
/* 920 */
0x12, 0x10, /* FC_UP [pointer_deref]
*/
/* 922 */ NdrFcShort( 0x2 ), /* Offset= 2 (924) */
/* 924 */
0x12, 0x0, /* FC_UP */
/* 926 */ NdrFcShort( 0x16 ), /* Offset= 22 (946) */
/* 928 */
0x15, /* FC_STRUCT
*/
/* 930 */ NdrFcShort( 0x10 ), /* 16 */
/* 932 */ 0x6, /* FC_SHORT */
/* 934 */ 0x1, /* FC_BYTE */
/* 936 */ 0x8, /* FC_ALIGNM4 */
/* 938 */ 0xb, /* FC_HYPER */
/* 940 */ 0x5b, /* FC_END */
/* 942 */ NdrFcShort( 0xfffffd2 ), /* Offset= -14 (928) */
/* 944 */
0x12, 0x8, /* FC_UP [simple_pointer]
*/
/* 946 */ 0x2, /* FC_CHAR */
/* 948 */ 0x5c, /* FC_PAD */
FC_BOGUS_STRUCT /*
/* 950 */ NdrFcShort( 0x20 ), /* 32 */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x0 ), /* Offset= 0 (954) */
/* 956 */ 0x8, /* FC_LONG */
/* 958 */ 0x6, /* FC_SHORT */

```

```

0x6, /* FC_SHORT
*/
/* 960 */ 0x6, /* FC_SHORT */
/* 962 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 0 */
/* 964 */ NdrFcShort( 0xfffffc42 ), /* Offset= -958 (6) */
/* 966 */ 0x5c, /* FC_PAD */ /* FC_END */
/* 968 */ 0x4b, /* FC_USER_MARSHAL */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x10 ), /* 16 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffffc32 ), /* Offset= -974 (2) */
/* 978 */
[allocated_on_stack] /*
/* 980 */ NdrFcShort( 0x6 ), /* Offset= 6 (986) */
/* 982 */
0x13, 0x0, /* FC_OP */
/* 984 */ NdrFcShort( 0xfffffdcd ), /* Offset= -36 (948) */
/* 986 */ 0xb4, /* FC_USER_MARSHAL */
/* 988 */ NdrFcShort( 0x0 ), /* 0 */
/* 990 */ NdrFcShort( 0x10 ), /* 16 */
/* 992 */ NdrFcShort( 0x0 ), /* 0 */
/* 994 */ NdrFcShort( 0xfffffd4 ), /* Offset= -12 (982) */
0x0
}
};
const CInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
(CInterfaceProxyVtbl *) &ITPCProxyVtbl,
};
const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
(CInterfaceStubVtbl *) &ITPCStubVtbl,
};
PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
"ITPCC",
};
#define _tpcc_com_ps_CHECK_IID(n) IID_GENERIC_CHECK_IID( _tpcc_com_ps,
pIID, n)
int _stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
if(!_tpcc_com_ps_CHECK_IID(0))
{
*pIndex = 0;
return 1;
}
return 0;
}
const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
(PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
(PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
(const PCInterfaceName *) &_tpcc_com_ps_InterfaceNamesList,
0, // no delegation
&_tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0, /* Filler3 */
};
#endif /* !defined(_M_IA64) && !defined(_M_IX86) */
#pragma warning( disable: 4049 ) /* more than 64k source lines */
/* this ALWAYS GENERATED file contains the proxy stub code */
/* File created by MIDL compiler version 5.03.0280 */
/* at Thu Dec 13 23:13:08 2001 */
/* Compiler settings for .\src\tpcc_com.ps.idl:
Oicf (OptLev=12), Wl, Zp8, env=win64 (32b run,appending), ms_ext, c_ext,
robust
error checks: allocation ref bounds_check enum stub_data
VC _declspec() decoration level:
_declspec(uuid()), _declspec(selectany), _declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
//@@MIDL_FILE_HEADING( )
#if defined(_M_IA64) || defined(_M_IX86)
#define USE_STUBLESS_PROXY
/* verify that the <rpcproxy.h> version is high enough to compile this file*/
#ifndef _REQUIRED_RPCPROXY_H_VERSION
#define _REQUIRED_RPCPROXY_H_VERSION 475

```

```

#endif
#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION
#error this stub requires an updated version of <rpcproxy.h>
#endif // __RPCPROXY_H_VERSION
#include "tpcc_com.ps.h"
#define TYPE_FORMAT_STRING_SIZE 979
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1
typedef struct _MIDL_TYPE_FORMAT_STRING
{
short Pad;
unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;
typedef struct _MIDL_PROC_FORMAT_STRING
{
short Pad;
unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;
extern const MIDL_TYPE_FORMAT_STRING _MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING _MIDL_ProcFormatString;
/* Standard interface: _MIDL_itf_tpcc_com_ps_0000, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */
/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xc0,0x00,0x00,0x00,0x00,0x00,0x46}} */
/* Object interface: ITPCC, ver. 0.0,
GUID={0xfefee6aa2,0x8481,0x11d2,{0xba,0x47,0x00,0xc0,0x4f,0xbf,0xe0,0x88}} */
extern const MIDL_STUB_DESC Object_StubDesc;
extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
#pragma code_seg("orpc")
static const unsigned short ITPCC_FormatStringOffsetTable[] =
{
0,
44,
88,
176,
220
};
static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
&Object_StubDesc,
_MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0,
0,
};
static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
&Object_StubDesc,
_MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0,
};
CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
&ITPCC_ProxyInfo,
&IID_ITPCC,
IUnknown_QueryInterface_Proxy,
IUnknown_AddRef_Proxy,
IUnknown_Release_Proxy,
(void *)-1 /* ITPCC::NewOrder */ ,
(void *)-1 /* ITPCC::Payment */ ,
(void *)-1 /* ITPCC::Delivery */ ,
(void *)-1 /* ITPCC::StockLevel */ ,
(void *)-1 /* ITPCC::OrderStatus */ ,
(void *)-1 /* ITPCC::CallSetComplete */
};
const CInterfaceStubVtbl _ITPCCStubVtbl =
{
&IID_ITPCC,
&ITPCC_ServerInfo,
9,
0, /* pure interpreted */
CStdStubBuffer_METHODS
};
extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];
static const MIDL_STUB_DESC Object_StubDesc =
{

```



```

/* 208 */ NdrFcShort( 0x6113 ), /* Flags: must size, must free, out,
simple_ref, srv alloc size=24 */
#endif
/* 210 */ ALPHAL NdrFcShort( 0x28 ), /* ia64 Stack size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* xpp64
Stack size/offset = 32 */
#endif
/* 212 */ NdrFcShort( 0x3c8 ), /* Type Offset=968 */
/* Return value */
/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
#endif
/* 216 */ ALPHAL NdrFcShort( 0x30 ), /* ia64 Stack size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* xpp64
Stack size/offset = 40 */
#endif
/* 218 */ 0x8, /* FC_LONG */
/* 0 */ /* 0 */
/* Procedure callsetComplete */
/* 220 */ 0x33, /* FC_AUTO_HANDLE */ /* Old Flags:
0x6c, */
object, 012 */
/* 222 */ NdrFCLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64, xpp64 Stack size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44, /* 012 Flags: has return, has ext, */
/* 236 */ 0xa, /* 10 */ /* Ext Flags:
0x1, */
new corr_desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */
/* Return value */
/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return, base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64, xpp64 Stack size/offset = 8 */
/* 250 */ 0x8, /* FC_LONG */
/* 0 */ /* 0 */
0x0
};
static const MIDL_TYPE_FORMAT_STRING __MIDL_TypeFormatString =
{
0,
{
/* 2 */ NdrFcShort( 0x0 ), /* 0 */
/* 4 */ NdrFcShort( 0x39e ), /* 0x12, 0x0, /* FC_UP */
/* 6 */ /* OffSet= 926 (930) */
/* FC_NONENCAPSULATED_UNION */
/* 8 */ 0x7, /* Corr desc: FC_USHORT */
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 14 */ NdrFcShort( 0x2 ), /* OffSet= 2 (16) */
/* 16 */ NdrFcShort( 0x10 ), /* 16 */
/* 18 */ NdrFcShort( 0x2b ), /* 43 */
/* 20 */ NdrFCLong( 0x3 ), /* 3 */
/* 24 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 26 */ NdrFCLong( 0x11 ), /* 17 */
/* 30 */ NdrFcShort( 0x8001 ), /* Simple arm type: FC_BYTE */
/* 32 */ NdrFCLong( 0x2 ), /* 2 */
/* 36 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 38 */ NdrFCLong( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x800a ), /* Simple arm type: FC_FLOAT */
/* 44 */ NdrFCLong( 0x5 ), /* 5 */
/* 48 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */
/* 50 */ NdrFCLong( 0xb ), /* 11 */
/* 54 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 58 */ NdrFCLong( 0x3 ), /* 10 */
/* 60 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 62 */ NdrFCLong( 0x6 ), /* 6 */
/* 66 */ NdrFcShort( 0xd6 ), /* OffSet= 214 (280) */
/* 68 */ NdrFCLong( 0x7 ), /* 7 */
/* 72 */ NdrFcShort( 0x800c ), /* Simple arm type: FC_DOUBLE */
/* 74 */ NdrFCLong( 0x8 ), /* 8 */
/* 78 */ NdrFcShort( 0xd0 ), /* OffSet= 208 (286) */
/* 80 */ NdrFCLong( 0x2 ), /* 13 */
/* 84 */ NdrFcShort( 0x2 ), /* OffSet= 228 (312) */
/* 86 */ NdrFCLong( 0x9 ), /* 9 */
/* 90 */ NdrFcShort( 0xf0 ), /* OffSet= 240 (330) */
/* 92 */ NdrFCLong( 0x200 ), /* 8192 */
/* 96 */ NdrFcShort( 0xf ), /* OffSet= 252 (348) */
/* 98 */ NdrFCLong( 0x24 ), /* 36 */
/* 102 */ NdrFcShort( 0x2f4 ), /* OffSet= 756 (858) */
/* 104 */ NdrFCLong( 0x4024 ), /* 1640 */
/* 108 */ NdrFcShort( 0x2ee ), /* OffSet= 750 (858) */
/* 110 */ NdrFCLong( 0x4011 ), /* 16401 */
/* 114 */ NdrFcShort( 0x26c ), /* OffSet= 748 (862) */
/* 116 */ NdrFCLong( 0x4002 ), /* 16386 */
/* 120 */ NdrFcShort( 0x2ea ), /* OffSet= 746 (866) */
/* 122 */ NdrFCLong( 0x4003 ), /* 16387 */
/* 126 */ NdrFcShort( 0x2e8 ), /* OffSet= 744 (870) */
/* 128 */ NdrFCLong( 0x4004 ), /* 16388 */
/* 132 */ NdrFcShort( 0x2e6 ), /* OffSet= 742 (874) */
/* 134 */ NdrFCLong( 0x4005 ), /* 16389 */
/* 138 */ NdrFcShort( 0x2e4 ), /* OffSet= 740 (878) */
/* 140 */ NdrFCLong( 0x400b ), /* 16395 */
/* 144 */ NdrFcShort( 0x2d2 ), /* OffSet= 722 (866) */
/* 146 */ NdrFCLong( 0x400a ), /* 16394 */
/* 150 */ NdrFcShort( 0x2d0 ), /* OffSet= 720 (870) */
/* 152 */ NdrFCLong( 0x4009 ), /* 16390 */
/* 156 */ NdrFcShort( 0x2d6 ), /* OffSet= 726 (882) */
/* 158 */ NdrFCLong( 0x4007 ), /* 16391 */
/* 162 */ NdrFcShort( 0x2cc ), /* OffSet= 716 (878) */
/* 164 */ NdrFCLong( 0x4008 ), /* 16392 */
/* 168 */ NdrFcShort( 0x2ce ), /* OffSet= 718 (886) */
/* 170 */ NdrFCLong( 0x400d ), /* 16397 */
/* 174 */ NdrFcShort( 0x2cc ), /* OffSet= 716 (890) */
/* 176 */ NdrFCLong( 0x4009 ), /* 16393 */
/* 180 */ NdrFcShort( 0x2ca ), /* OffSet= 714 (894) */
/* 182 */ NdrFCLong( 0x6000 ), /* 24576 */
/* 186 */ NdrFcShort( 0x2c8 ), /* OffSet= 712 (898) */
/* 188 */ NdrFCLong( 0x400c ), /* 16396 */
/* 192 */ NdrFcShort( 0x2c6 ), /* OffSet= 710 (902) */
/* 194 */ NdrFCLong( 0x10 ), /* 16 */
/* 198 */ NdrFcShort( 0x8002 ), /* Simple arm type: FC_CHAR */
/* 200 */ NdrFCLong( 0x12 ), /* 18 */
/* 204 */ NdrFcShort( 0x8006 ), /* Simple arm type: FC_SHORT */
/* 206 */ NdrFCLong( 0x13 ), /* 19 */
/* 210 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 212 */ NdrFCLong( 0x16 ), /* 23 */
/* 216 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 218 */ NdrFCLong( 0x17 ), /* 23 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm type: FC_LONG */
/* 224 */ NdrFCLong( 0xe ), /* 14 */
/* 228 */ NdrFcShort( 0xe ), /* OffSet= 682 (910) */
/* 230 */ NdrFCLong( 0x400e ), /* 16398 */
/* 234 */ NdrFcShort( 0x2b0 ), /* OffSet= 688 (922) */
/* 236 */ NdrFCLong( 0x4010 ), /* 16400 */
/* 240 */ NdrFcShort( 0x2ae ), /* OffSet= 686 (926) */
/* 242 */ NdrFCLong( 0x4012 ), /* 16402 */
/* 246 */ NdrFcShort( 0x26c ), /* OffSet= 620 (866) */
/* 248 */ NdrFCLong( 0x4013 ), /* 16403 */
/* 252 */ NdrFcShort( 0x26a ), /* OffSet= 618 (870) */
/* 254 */ NdrFCLong( 0x4016 ), /* 16406 */
/* 258 */ NdrFcShort( 0x264 ), /* OffSet= 612 (870) */
/* 260 */ NdrFCLong( 0x4017 ), /* 16407 */
/* 264 */ NdrFcShort( 0x25e ), /* OffSet= 606 (870) */
/* 266 */ NdrFCLong( 0x0 ), /* 0 */
/* 270 */ NdrFcShort( 0x0 ), /* OffSet= 0 (270) */
/* 272 */ NdrFCLong( 0x1 ), /* 1 */
/* 276 */ NdrFcShort( 0x0 ), /* OffSet= 0 (276) */
/* 278 */ NdrFCLong( 0xf ), /* OffSet= -1 (277) */
/* 280 */ NdrFcShort( 0xfffffff ),
/* FC_STRUCT
0x15, /* 7 */
0x7, /* 8 */
0xb, /* FC_HYPER */
0x5b, /* FC_END */
0x12, 0x0, /* FC_UP */
/* OffSet= 14 (302) */
0x1b, /* FC_CARRY
/* 292 */ NdrFcShort( 0x2 ), /* 292 */
0x9, /* 294 */
/* 296 */ NdrFcShort( 0xf ), /* -8 */
/* 298 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 300 */ 0x6, /* OffSet= 2 (16) */
0x17, /* FC_CSTRUCT
/* 304 */ NdrFcShort( 0x8 ), /* 304 */
/* 306 */ NdrFcShort( 0xfffff0 ), /* OffSet= -16 (290) */
/* 308 */ 0x8, /* FC_LONG */
0x5c, /* FC_PAD */
/* 310 */ 0x5c, /* FC_END */
/* 312 */ 0x2f, /* FC_IP */
0x5a,
FC_CONSTANT_ID */
/* 314 */ NdrFCLong( 0x0 ), /* 0 */
/* 318 */ NdrFcShort( 0x0 ), /* 0 */
/* 322 */ NdrFCLong( 0x0 ), /* 192 */
0x0, /* 0 */
0x0, /* 0 */
0x0, /* 0 */
0x46, /* 70 */
0x2f, /* FC_IP */
0x5a,
FC_CONSTANT_ID */
/* 332 */ NdrFCLong( 0x20400 ), /* 132096 */
/* 336 */ NdrFcShort( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ 0xc0, /* 192 */
0x0, /* 0 */
0x0, /* 0 */
0x0, /* 0 */
0x46, /* 70 */
0x12, 0x10, /* FC_UP [pointer_deref]
/* 350 */ NdrFcShort( 0x2 ), /* OffSet= 2 (352) */
/* 352 */ /* 0x12, 0x0, /* FC_UP */
/* OffSet= 486 (840) */
0x2a, /* 0x2a,
/* 358 */ NdrFcShort( 0x20 ), /* 32 */
/* 360 */ NdrFcShort( 0xa ), /* 10 */
/* 362 */ NdrFCLong( 0x8 ), /* 8 */
/* 366 */ NdrFcShort( 0x50 ), /* OffSet= 80 (446) */
/* 368 */ NdrFCLong( 0xd ), /* 13 */
/* 372 */ NdrFcShort( 0x70 ), /* OffSet= 112 (484) */
/* 374 */ NdrFCLong( 0x9 ), /* 9 */
/* 378 */ NdrFcShort( 0x90 ), /* OffSet= 144 (522) */
/* 380 */ NdrFCLong( 0x2c ), /* 12 */
/* 384 */ NdrFcShort( 0xb0 ), /* OffSet= 176 (560) */
/* 386 */ NdrFCLong( 0x24 ), /* 36 */
/* 390 */ NdrFcShort( 0x104 ), /* OffSet= 260 (650) */
/* 392 */ NdrFCLong( 0x80d ), /* 32781 */
/* 396 */ NdrFcShort( 0x120 ), /* OffSet= 288 (684) */
/* 398 */ NdrFCLong( 0x10 ), /* 16 */
/* 402 */ NdrFcShort( 0x13a ), /* OffSet= 314 (716) */
/* 404 */ NdrFCLong( 0x2 ), /* 2 */
/* 408 */ NdrFcShort( 0x150 ), /* OffSet= 336 (744) */
/* 410 */ NdrFCLong( 0x3 ), /* 3 */
/* 414 */ NdrFcShort( 0x166 ), /* OffSet= 358 (772) */
/* 416 */ NdrFCLong( 0x14 ), /* 20 */
/* 420 */ NdrFcShort( 0x17 ), /* OffSet= 420 (840) */
/* 422 */ NdrFCLong( 0xf ), /* OffSet= -1 (421) */
/* 424 */
FC_BOGUS_ARRAY */
/* 426 */ NdrFcShort( 0x0 ), /* 0x3,
/* 428 */ 0x19, /* Corr desc: field pointer, FC_ULONG
0x0,
/* 430 */ NdrFcShort( 0x0 ), /* 0 */
/* 432 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 434 */ NdrFCLong( 0xfffff ), /* -1 */
/* 438 */ NdrFcShort( 0x0 ), /* Corr flags:
/* 440 */
/* 442 */ NdrFcShort( 0xfffff74 ), /* 0x12, 0x0, /* FC_UP */
/* 444 */ 0x5c, /* OffSet= -140 (302) */
/* FC_END */
0x1a, /* 0x1a,
/* 446 */
FC_BOGUS_STRUCT */
/* 448 */ NdrFcShort( 0x10 ), /* 16 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ NdrFcShort( 0x6 ), /* OffSet= 6 (458) */
/* 454 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8
/* 456 */ 0x36, /* FC_POINTER */
/* 458 */ 0x5b, /* FC_END */
0x11, 0x0, /* FC_RP */
/* 460 */ NdrFcShort( 0xfffffdd ), /* OffSet= -36 (424) */
FC_BOGUS_ARRAY */
/* 462 */ NdrFcShort( 0x0 ), /* 0x3,
/* 464 */ 0x19, /* Corr desc: field pointer, FC_ULONG
/* 466 */
/* 468 */ NdrFcShort( 0x0 ), /* 0 */
/* 470 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 472 */ NdrFCLong( 0xfffffff ), /* -1 */
/* 476 */ NdrFcShort( 0x0 ), /* Corr flags:
/* 478 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
/* 480 */ NdrFcShort( 0xfffff58 ), /* OffSet= -168 (312) */
/* 482 */ 0x5c, /* FC_PAD */
/* 484 */ 0x5b, /* FC_END */
0x1a, /* 0x1a,
/* 486 */ NdrFcShort( 0x10 ), /* 16 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ NdrFcShort( 0x6 ), /* OffSet= 6 (496) */
/* 492 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8
/* 494 */ 0x36, /* FC_POINTER */
/* 496 */ 0x5b, /* FC_END */
0x11, 0x0, /* FC_RP */
/* 498 */ NdrFcShort( 0xfffffdd ), /* OffSet= -36 (462) */
FC_BOGUS_ARRAY */
/* 500 */ NdrFcShort( 0x0 ), /* 0x3,
/* 502 */ 0x19, /* Corr desc: field pointer, FC_ULONG
/* 504 */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 510 */ NdrFCLong( 0xfffffff ), /* -1 */
/* 514 */ NdrFcShort( 0x0 ), /* Corr flags:
/* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
/* 518 */ NdrFcShort( 0xfffff44 ), /* OffSet= -188 (330) */
/* 520 */ 0x5c, /* FC_PAD */
/* 522 */ 0x5b, /* FC_END */

```

```

/* 522 */
FC_BOGUS_STRUCT */
/* 524 */ NdrFcShort( 0x10 ),
/* 526 */ NdrFcShort( 0x0 ),
/* 528 */ NdrFcShort( 0x6 ),
/* 530 */ 0x8,
/* 532 */ 0x36,
/* 534 */
/* 536 */ NdrFcShort( 0xffffffff ),
/* 538 */
FC_BOGUS_ARRAY */
/* 540 */ NdrFcShort( 0x0 ),
/* 542 */ 0x19,
/* 544 */ NdrFcShort( 0x0 ),
/* 546 */ NdrFcShort( 0x1 ),
/* 548 */ NdrFcLong( 0xffffffff ),
/* 552 */ NdrFcShort( 0x0 ),
/* 554 */
/* 556 */ NdrFcShort( 0x176 ),
/* 558 */ 0x5c,
/* 560 */
FC_BOGUS_STRUCT */
/* 562 */ NdrFcShort( 0x10 ),
/* 564 */ NdrFcShort( 0x0 ),
/* 566 */ NdrFcShort( 0x6 ),
/* 568 */ 0x8,
/* 570 */ 0x36,
/* 572 */
/* 574 */ NdrFcShort( 0xffffffff ),
/* 576 */
FC_CONSTANT_IID */
/* 578 */ NdrFcLong( 0x2f ),
/* 582 */ NdrFcShort( 0x0 ),
/* 584 */ NdrFcShort( 0x0 ),
/* 586 */ 0xc0,
/* 588 */ 0x0,
/* 590 */ 0x0,
/* 592 */ 0x0,
/* 594 */
/* 596 */ NdrFcShort( 0x1 ),
/* 598 */ 0x19,
/* 600 */ NdrFcShort( 0x4 ),
/* 602 */ NdrFcShort( 0x1 ),
/* 604 */ 0x1,
/* 606 */
FC_BOGUS_STRUCT */
/* 608 */ NdrFcShort( 0x18 ),
/* 610 */ NdrFcShort( 0x0 ),
/* 612 */ NdrFcShort( 0xc ),
/* 614 */ 0x8,
/* 616 */ 0x4c,
/* 618 */ NdrFcShort( 0xffffffff6 ),
/* 620 */ 0x39,
/* 622 */ 0x5c,
/* 624 */
/* 626 */ NdrFcShort( 0xffffffffe0 ),
/* 628 */
FC_BOGUS_ARRAY */
/* 630 */ NdrFcShort( 0x0 ),
/* 632 */ 0x19,
/* 634 */ NdrFcShort( 0x0 ),
/* 636 */ NdrFcShort( 0x1 ),
/* 638 */ NdrFcLong( 0xffffffff ),
/* 642 */ NdrFcShort( 0x0 ),
/* 644 */
/* 646 */ NdrFcShort( 0xffffffff8 ),
/* 648 */ 0x5c,
/* 650 */

```

```

FC_BOGUS_STRUCT */
/* 652 */ NdrFcShort( 0x10 ),
/* 654 */ NdrFcShort( 0x0 ),
/* 656 */ NdrFcShort( 0x6 ),
/* 658 */ 0x8,
/* 660 */ 0x36,
/* 662 */
/* 664 */ NdrFcShort( 0xffffffff ),
/* 666 */
FC_SMFARRAY */
/* 668 */ NdrFcShort( 0x8 ),
/* 670 */ 0x1,
/* 672 */
/* 674 */ NdrFcShort( 0x10 ),
/* 676 */ 0x8,
/* 678 */ 0x6,
/* 680 */
FC_EMBEDDED_COMPLEX */
/* 684 */ 15 (666) */
/* 686 */ NdrFcShort( 0x20 ),
/* 688 */ NdrFcShort( 0x0 ),
/* 690 */ NdrFcShort( 0xa ),
/* 692 */ 0x8,
/* 694 */ 0x36,
/* 696 */
FC_EMBEDDED_COMPLEX */
/* 700 */ 25 (672) */
/* 702 */ NdrFcShort( 0xffffffff10 ),
/* 704 */
/* 706 */ NdrFcShort( 0x1 ),
/* 708 */ 0x19,
/* 710 */ NdrFcShort( 0x0 ),
/* 712 */ NdrFcShort( 0x1 ),
/* 714 */ 0x1,
/* 716 */
FC_BOGUS_STRUCT */
/* 718 */ NdrFcShort( 0x10 ),
/* 720 */ NdrFcShort( 0x0 ),
/* 722 */ NdrFcShort( 0x6 ),
/* 724 */ 0x8,
/* 726 */ 0x36,
/* 728 */
/* 730 */ NdrFcShort( 0xffffffffe6 ),
/* 732 */
/* 734 */ NdrFcShort( 0x2 ),
/* 736 */ 0x19,
/* 738 */ NdrFcShort( 0x0 ),
/* 740 */ NdrFcShort( 0x1 ),
/* 742 */ 0x6,
/* 744 */
FC_BOGUS_STRUCT */
/* 746 */ NdrFcShort( 0x10 ),
/* 748 */ NdrFcShort( 0x0 ),
/* 750 */ NdrFcShort( 0x6 ),
/* 752 */ 0x8,
/* 754 */ 0x36,
/* 756 */
/* 758 */ NdrFcShort( 0xffffffffe6 ),
/* 760 */

```

```

/* 762 */ NdrFcShort( 0x4 ),
/* 764 */ 0x19,
/* 766 */ NdrFcShort( 0x0 ),
/* 768 */ NdrFcShort( 0x1 ),
/* 770 */ 0x8,
/* 772 */
FC_BOGUS_STRUCT */
/* 774 */ NdrFcShort( 0x10 ),
/* 776 */ NdrFcShort( 0x0 ),
/* 778 */ NdrFcShort( 0x6 ),
/* 780 */ 0x8,
/* 782 */ 0x36,
/* 784 */
/* 786 */ NdrFcShort( 0xffffffffe6 ),
/* 788 */
/* 790 */ NdrFcShort( 0x8 ),
/* 792 */ 0x19,
/* 794 */ NdrFcShort( 0x0 ),
/* 796 */ NdrFcShort( 0x1 ),
/* 798 */ 0xb,
/* 800 */
FC_BOGUS_STRUCT */
/* 802 */ NdrFcShort( 0x10 ),
/* 804 */ NdrFcShort( 0x0 ),
/* 806 */ NdrFcShort( 0x6 ),
/* 808 */ 0x8,
/* 810 */ 0x36,
/* 812 */
/* 814 */ NdrFcShort( 0xffffffffe6 ),
/* 816 */
/* 818 */ NdrFcShort( 0x8 ),
/* 820 */ 0x8,
/* 822 */ 0x5c,
/* 824 */
/* 826 */ NdrFcShort( 0x8 ),
/* 828 */ 0x7,
/* 830 */ NdrFcShort( 0xfffc8 ),
/* 832 */ NdrFcShort( 0x1 ),
/* 834 */ 0x4c,
/* 836 */ NdrFcShort( 0xfffffffffec ),
/* 838 */ 0x5c,
/* 840 */
FC_BOGUS_STRUCT */
/* 842 */ NdrFcShort( 0x38 ),
/* 844 */ NdrFcShort( 0xfffffffffec ),
/* 846 */ NdrFcShort( 0x0 ),
/* 848 */ 0x6,
/* 850 */ 0x38,
/* 852 */ 0x8,
/* 854 */
FC_EMBEDDED_COMPLEX */
/* 858 */ 499 (356) */
/* 858 */ NdrFcShort( 0xffffffffe0 ),
/* 860 */ 0x5b,
/* 862 */ NdrFcShort( 0xfffffffff02 ),
/* 864 */ 0x1,
/* 866 */
/* 868 */ 0x6,
/* 870 */
/* 872 */ 0x8,

```

```

/* 874 */
/*
/* 876 */ 0xa, /* FC_FLOAT */
/* 878 */ 0x12, 0x8, /* FC_UP [simple_pointer]
/*
/* 880 */ 0xc, /* FC_DOUBLE */
/* 882 */ 0x5c, /* FC_PAD */
/* 884 */ NdrFcShort( 0xfffffda4 ), /* 0x12, 0x0, /* FC_UP */
/* 886 */ /* Offset= -604 (280) */
/* 888 */ NdrFcShort( 0xfffffda6 ), /* 0x12, 0x10, /* FC_UP [pointer_deref]
/* 890 */ /* Offset= -602 (286) */
/* 892 */ NdrFcShort( 0xfffffdbc ), /* 0x12, 0x10, /* FC_UP [pointer_deref]
/* 894 */ /* Offset= -580 (312) */
/* 896 */ NdrFcShort( 0xfffffda ), /* 0x12, 0x10, /* FC_UP [pointer_deref]
/* 898 */ /* Offset= -566 (330) */
/* 900 */ NdrFcShort( 0xfffffdd8 ), /* 0x12, 0x10, /* FC_UP [pointer_deref]
/* 902 */ /* Offset= -552 (348) */
/* 904 */ NdrFcShort( 0x2 ), /* 0x12, 0x10, /* FC_UP [pointer_deref]
/* 906 */ /* Offset= 2 (906) */
/* 908 */ NdrFcShort( 0x16 ), /* 0x12, 0x0, /* FC_UP */
/* 910 */ /* Offset= 22 (930) */
/*
/* 912 */ NdrFcShort( 0x10 ), /* 0x15, /* FC_STRUCT
/* 914 */ 0x6, /* 0x7, /* 7 */
/* 916 */ 0x1, /* 0x7, /* 16 */
/* 918 */ 0x8, /* 0x1, /* FC_SHORT */
/* 920 */ 0xb, /* 0x1, /* FC_BYTE */
/* 922 */ /* 0x38, /* FC_ALIGNM4
/* 924 */ NdrFcShort( 0xfffffff2 ), /* 0x8, /* FC_LONG */
/* 926 */ /* 0x39, /* FC_ALIGNM8
/* 928 */ 0x2, /* 0xb, /* FC_HYPER */
/* 930 */ /* 0x5b, /* FC_END */
/* 932 */ NdrFcShort( 0xfffffff2 ), /* 0x12, 0x0, /* FC_UP */
/* 934 */ /* Offset= -14 (910) */
/* 936 */ 0x2, /* 0x12, 0x8, /* FC_UP [simple_pointer]
/* 938 */ /* FC_CHAR */
/* 940 */ 0x2, /* 0x5c, /* FC_PAD */
/* 942 */ /* 0x1a, /*
/* 944 */ /* 0x7, /* 7 */
/* 946 */ NdrFcShort( 0x20 ), /* 0x7, /* 32 */
/* 948 */ NdrFcShort( 0x0 ), /* 0x0, /* 0 */
/* 950 */ NdrFcShort( 0x0 ), /* Offset= 0 (936) */
/* 952 */ 0x6, /* FC_LONG */
/* 954 */ /* 0x8, /* FC_LONG */
/* 956 */ /* 0x6, /* FC_SHORT */
/* 958 */ /* 0x6, /* FC_SHORT
/* 960 */ /* 0x6, /* FC_SHORT
/*
/* 962 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
/* 964 */ 0x0, /* 0x0, /* 0 */
/* 966 */ NdrFcShort( 0xfffffc54 ), /* Offset= -940 (6) */
/* 968 */ 0x5c, /* FC_PAD */
/* 970 */ 0xb4, /* FC_USER_MARSHAL */
/* 972 */ NdrFcShort( 0x0 ), /* 0x83, /* 131 */
/* 974 */ NdrFcShort( 0x18 ), /* 0x0, /* 0 */
/* 976 */ NdrFcShort( 0x0 ), /* 0x18, /* 24 */
/* 978 */ NdrFcShort( 0x0 ), /* 0x0, /* 0 */
/* 980 */ NdrFcShort( 0xfffffc44 ), /* Offset= -956 (2) */
/* 982 */ /* 0x11, 0x4, /* FC_RP
/* 984 */ /* Offset= 6 (968) */
/* 986 */ 0xb4, /* 0x13, 0x0, /* FC_OP */
/* 988 */ /* Offset= -36 (930) */
/* 990 */ /* FC_USER_MARSHAL */
/* 992 */ /* 0x83, /* 131 */
/* 994 */ /* 0x0, /* 0 */
/* 996 */ /* 0x18, /* 24 */
/* 998 */ /* 0x0, /* 0 */
/* 1000 */ /* Offset= -12 (964) */
/*
}
};
const CInterfaceProxyVtbl * _tpcc_com_ps_ProxyVtblList[] =
{
( CInterfaceProxyVtbl *) &ITPCCProxyVtbl,
};
const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
( CInterfaceStubVtbl *) &ITPCCStubVtbl,
};

```

```

0
};
PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
"ITPCC",
0
};
#define _tpcc_com_ps_CHECK_IID(n) IID_GENERIC_CHECK_IID( _tpcc_com_ps,
pIID, n)
int _stdcall _tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
if(!_tpcc_com_ps_CHECK_IID(0))
{
*pIndex = 0;
return 1;
}
return 0;
}
const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
(PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
(PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
(const PCInterfaceName *) &_tpcc_com_ps_InterfaceNamesList,
0, // no delegation
&_tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0 /* Filler3 */
};
#endif /* defined(_M_IA64) || defined(_M_AXP64) */

```

Appendix B : Database Design

Build Scripts

setup.cmd

```

::@ECHO OFF
*****
@ECHO *
*
@ECHO * Microsoft TPC-C V3 Benchmark Kit Ver. IA-64
*
@ECHO *
*
@ECHO *****
*****

@rem if not "%PROCESSOR_ARCHITECTURE%" == 'IA64' goto wrongOS

@if '%1'==' ' goto usage
@if '%2'==' ' goto usage
@if '%3'==' ' goto usage
@if not '%4'==' ' if not '%4' == 'normal' if not '%4' == 'scale_down' goto usage

:: Cleanup any old .err files
@if exist logs\*.err del logs\*.err
>nul

@if '%3'=='full' goto start
@if '%3'=='bulddb' goto bulddb
@if '%3'=='objects' goto objects
@if '%3'=='bulkload' goto bulkload
@if '%3'=='objectsfull' goto objects
@if '%3'=='bulkloadfull' goto bulkload
@if '%3'=='backup' goto backup
goto usage

:start
:: Cleanup the logs directory...
@if exist logs\version.log del logs\version.log
>nul
@if exist logs\db.log del logs\db.log
>nul
@if exist logs\objects.log del logs\objects.log
>nul
@if exist logs\objects.log del logs\objects.log
>nul
@if exist logs\bulkload.log del logs\bulkload.log
>nul
@if exist logs\backup.log del logs\backup.log
>nul

@osql -usa -P -S%1 -Q"select @@version"
> logs\version.log
@osql -usa -P -S%1 -Q"select getdate()"
>> logs\version.log

:bulddb
@if exist logs\db.log del logs\db.log
>nul
@ECHO Removing any existing TPC-C database and backup devices...
@osql -usa -P -S%1 -usa -P < scripts\%2.war\database\removedb.sql >
logs\db.log
@ECHO Creating Backup Device(s)...
@osql -usa -P -S%1 -usa -P < scripts\%2.war\database\backupdev.sql >>
logs\db.log
@if errorlevel 1 goto CREATE_ERROR
@ECHO Building database files and database...
@osql -usa -P -S%1 -b -usa -P < scripts\%2.war\database\createdb.sql
>> logs\db.log
@if errorlevel 1 goto CREATE_ERROR
@ECHO Database build complete.
@if '%3'=='full' goto objects

```

```

goto end

:objects
@if exist logs\objects.log del logs\objects.log
>nul
@ECHO Creating TPC-C database tables...
@osql -usa -P -S%1 -b -usa -P < scripts\%2.war\ddl\tables.sql
> logs\objects.log
@if errorlevel 1 goto TABLES_ERROR
@ECHO Creating database objects...
@osql -usa -P -S%1 -b -usa -P < scripts\dm1\neword.sql
>> logs\objects.log
@if errorlevel 1 goto NEWORDER_ERROR
@osql -usa -P -S%1 -b -usa -P < scripts\dm1\payment.sql
>> logs\objects.log
@if errorlevel 1 goto PAYMENT_ERROR
@osql -usa -P -S%1 -b -usa -P < scripts\dm1\ordstat.sql
>> logs\objects.log
@if errorlevel 1 goto ORDERSTATUS_ERROR
@osql -usa -P -S%1 -b -usa -P < scripts\dm1\delivery.sql
>> logs\objects.log
@if errorlevel 1 goto DELIVERY_ERROR
@osql -usa -P -S%1 -b -usa -P < scripts\dm1\stocklev.sql
>> logs\objects.log
@if errorlevel 1 goto STOCKLEVEL_ERROR
@osql -usa -P -S%1 -usa -P < scripts\dm1\version.sql
>> logs\objects.log
@ECHO Database object creation complete.
@if '%3'=='full' goto bulkload
@if '%3'=='objectsfull' goto bulkload
goto end

:bulkload
@if exist logs\bulkload.log del logs\bulkload.log
>nul
@ECHO Setting database options before load...
@osql -usa -P -S%1 -b -usa -P < scripts\utility\dbopt1.sql
>> logs\objects.log
@if errorlevel 1 goto DBOPT1_ERROR
@ECHO Beginning data load and index creation...
@osql -usa -P -S%1 -b -usa -P < scripts\%2.war\ddl\idxhisc1.sql
> logs\idxhisc1.log
@if '%4'==' ' loader\IA64\bin\tpccldr -S%1 -W%2 -flogs\bulkload.log -
dscripts\%2.war\ddl -c0
@if errorlevel 1 goto END
@if '%4'=='normal' loader\IA64\bin\tpccldr -S%1 -W%2 -flogs\bulkload.log -
dscripts\%2.war\ddl -c0
@if errorlevel 1 goto END
@if '%4'=='scale_down' loader\IA64\bin\tpccldr -S%1 -W%2 -flogs\bulkload.log -
dscripts\%2.war\ddl -c1
@if errorlevel 1 goto END
goto bulkloaddone
:bulkloaddone
@ECHO Setting database options after load...
@osql -usa -P -S%1 -b -usa -P < scripts\utility\dbopt2.sql
>> logs\bulkload.log
@if errorlevel 1 goto DBOPT2_ERROR
@ECHO Data load and index creation complete.

@ECHO.
@ECHO Calculating initial database space usage...
@cd.. \acid\space
@call space.cmd %1
@cd.. \.. \setup

@if '%3'=='full' goto backup
@if '%3'=='objectsfull' goto backup
@if '%3'=='bulkloadfull' goto backup
goto end

:backup
@if exist logs\backup.log del logs\backup.log
>nul
@ECHO Backing up database...
@osql -usa -P -S%1 -b -usa -P < scripts\%2.war\database\backup.sql >
logs\backup.log
@if errorlevel 1 goto BACKUP_ERROR
@ECHO Database backup complete.
@if '%3'=='full' goto verifyload
@if '%3'=='objectsfull' goto verifyload
@if '%3'=='bulkloadfull' goto verifyload
goto complete

:verifyload

```

```

@if exist logs\verifyload.log del logs\verifyload.log
>nul
@ECHO Verifying TPC-C database load...
@osql -usa -P -S%1 -b -usa -P < scripts\utility\verifytpccload.sql
> logs\verifyload.log
@if errorlevel 1 goto VERIFY_ERROR
@ECHO Check logs\verifyload.log to verify database load.

:complete
@ECHO
*****
@ECHO *
*
@ECHO * TPC-C V3 build complete. Check logs directory for setup errors.
*
@ECHO *
*
@ECHO *****
*****

goto end

:usage
@ECHO *****
@ECHO *
@ECHO * The TPC-C setup command file requires the following parameters:
@ECHO *
@ECHO * setup SERVER NUMWAR BLDLOPT VERSION DBTYPE
@ECHO *
@ECHO * SERVER = machine name of server (use "" for local server)
@ECHO * NUMWAR = number of warehouses
@ECHO * BLDLOPT = full, bulddb, objects, objectsfull, bulkload,
@ECHO * bulkloadfull, or backup
@ECHO * DBTYPE = normal or scale_down
@ECHO *
@ECHO * Note #1: the BLDLOPT and VERSION parameters are case sensitive.
@ECHO *
@ECHO * Note #2: the DBTYPE is optional. If no DBTYPE is specified, SETUP
@ECHO * will default to NORMAL.
@ECHO *
@ECHO * Example:
@ECHO *
@ECHO * The following command would be used to build a complete 200
@ECHO * warehouse database on SQL Server 7.0 running on server \\myserver.
@ECHO *
@ECHO * SETUP myserver 200 full
@ECHO *
@ECHO * NOTE 1: This command file does a backup of the database by default
@ECHO * after the database build process is complete. If you do not wish
@ECHO * to make a backup (strongly discouraged), you must edit this file
@ECHO * and comment that section out. Also, if you need to run the dbcheck
@ECHO * and the dbtables scripts on the fresh database load for an audit,
@ECHO * you must either run them manually or edit this file to include them.
@ECHO *
@ECHO * NOTE 2: The TPC-C setup program supports both Intel and Alpha
@ECHO * systems. It queries the %PROCESSOR_ARCHITECTURE% environment
@ECHO * variable and runs the appropriate executables.
@ECHO *
@ECHO *****
@goto end

:CREATE_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error in the database/backup device creation.
@echo.
@echo Check your CREATEDB.SQL, BACKUPDEV.SQL, LOGS\DB.LOG, and the
@echo MSSQL Server errorlog (PROGRAM FILES\MICROSOFT SQL
SERVER\MSSQL\LOG\ERRORLOG) for details.
@goto END

:TABLES_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error in the table creation.
@echo.
@echo Verify that the FileGroup names specified in CREATEDB.SQL
@echo match those specified in SCRIPTS\DDL\TABLES.SQL.
@echo.
@goto END

```

```

:NEWORDER_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error in the creation of the New Order stored procedure.
@echo.
@echo Check your LOGS\OBJECTS.LOG, SCRIPTS\DML\NEWORD.SQL and the
@echo SQL Server errorlog (PROGRAM FILES\MICROSOFT SQL
SERVER\MSSQL\LOG\ERRORLOG) for details.
@echo.
@goto END

:PAYMENT_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error in the creation of the Payment stored procedure.
@echo.
@echo Check your LOGS\OBJECTS.LOG, SCRIPTS\DML\PAYMENT.SQL and the
@echo SQL Server errorlog (PROGRAM FILES\MICROSOFT SQL
SERVER\MSSQL\LOG\ERRORLOG) for details.
@echo.
@goto END

:ORDERSTATUS_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error in the creation of the Order Status stored procedure.
@echo.
@echo Check your LOGS\OBJECTS.LOG, SCRIPTS\DML\ORDSTAT.SQL and the
@echo SQL Server errorlog (PROGRAM FILES\MICROSOFT SQL
SERVER\MSSQL\LOG\ERRORLOG) for details.
@echo.
@goto END

:DELIVERY_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error in the creation of the Delivery stored procedure.
@echo.
@echo Check your LOGS\OBJECTS.LOG, SCRIPTS\DML\DELIVERY.SQL and the
@echo SQL Server errorlog (PROGRAM FILES\MICROSOFT SQL
SERVER\MSSQL\LOG\ERRORLOG) for details.
@echo.
@goto END

:STOCKLEVEL_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error in the creation of the Stock Level stored procedure.
@echo.
@echo Check your LOGS\OBJECTS.LOG, SCRIPTS\DML\STOCKLEV.SQL and the
@echo SQL Server errorlog (PROGRAM FILES\MICROSOFT SQL
SERVER\MSSQL\LOG\ERRORLOG) for details.
@echo.
@goto END

:DBOPT1_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error setting the database options before load.
@echo.
@echo Check your LOGS\OBJECTS.LOG and the SQL Server errorlog
@echo (PROGRAM FILES\MICROSOFT SQL SERVER\MSSQL\LOG\ERRORLOG) for details.
@echo.
@goto END

:DBOPT2_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error setting the database options after load.
@echo.
@echo Check your LOGS\OBJECTS.LOG and the SQL Server errorlog
@echo (MSSQL7\LOG\ERRORLOG) for details.
@echo.
@goto END

:BACKUP_ERROR

```

```

@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error backing up the database after load.
@echo.
@echo Check your LOGS\BACKUP.LOG and the SQL Server errorlog
@echo (PROGRAM FILES\MICROSOFT SQL SERVER\MSSQL\LOG\ERRORLOG) for details.
@echo.
@goto END

:VERIFY_ERROR
@echo.
@echo BUILD ABORTED!
@echo.
@echo There was an error performing TPC-C database verification.
@echo.
@echo Check your LOGS\VERIFYLOAD.LOG and the SQL Server errorlog
@echo (MSSQL7\LOG\ERRORLOG) for details.
@echo.
@goto END

:WRONGOS
@echo.
@echo BUILD ABORTED!
@echo.
@echo This version of the Microsoft TPC-C kit is for use with SQL Server IA-64
ONLY!
@echo Please check http://msqlperf.rte.microsoft.com for the latest Microsoft
TPC-C
@echo kit for use on non IA-64 systems.
@echo.
@goto END

:end

echo on

```

backup.sql

```

dump database tpcc to
tpccback01,
tpccback02,
tpccback03,
tpccback04,
tpccback05,
tpccback06,
tpccback07,
tpccback08,
tpccback09,
tpccback10,
tpccback11,
tpccback12,
tpccback13,
tpccback14,
tpccback15,
tpccback16,
tpccback17,
tpccback18,
tpccback19,
tpccback20,
tpccback21,
tpccback22,
tpccback23,
tpccback24,
tpccback25,
tpccback26,
tpccback27
with init, stats = 1
go

dump database tpcc to
tpccback28,
tpccback29,
tpccback30,
tpccback31,
tpccback32,
tpccback33,
tpccback34,
tpccback35,
tpccback36,
tpccback37,
tpccback38,

```

```

tpccback39,
tpccback40,
tpccback41,
tpccback42,
tpccback43,
tpccback44,
tpccback45,
tpccback46,
tpccback47,
tpccback48,
tpccback49,
tpccback50,
tpccback51,
tpccback52,
tpccback53,
tpccback54
with init, stats = 1
go

```

backupdev.sql

```

-- File: BACKUPdevB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Creates tpcc database Backup devices

```

```

use master
go

-- create backup devices

```

```

exec sp_addumpdevice
'disk', 'tpccback01', 'z:\dev\b001\tpccback01.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback02', 'z:\dev\b002\tpccback02.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback03', 'z:\dev\b003\tpccback03.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback04', 'z:\dev\b004\tpccback04.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback05', 'z:\dev\b005\tpccback05.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback06', 'z:\dev\b006\tpccback06.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback07', 'z:\dev\b007\tpccback07.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback08', 'z:\dev\b008\tpccback08.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback09', 'z:\dev\b009\tpccback09.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback10', 'z:\dev\b010\tpccback10.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback11', 'z:\dev\b011\tpccback11.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback12', 'z:\dev\b012\tpccback12.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback13', 'z:\dev\b013\tpccback13.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback14', 'z:\dev\b014\tpccback14.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback15', 'z:\dev\b015\tpccback15.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback16', 'z:\dev\b016\tpccback16.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback17', 'z:\dev\b017\tpccback17.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback18', 'z:\dev\b018\tpccback18.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback19', 'z:\dev\b019\tpccback19.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback20', 'z:\dev\b020\tpccback20.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback21', 'z:\dev\b021\tpccback21.37000W.72X.1og600g.sqlsvr760'
exec sp_addumpdevice
'disk', 'tpccback22', 'z:\dev\b022\tpccback22.37000W.72X.1og600g.sqlsvr760'

```



```
(NAME=MSSQL_cs69, FILENAME='z:\dev\c069', SIZE=30000MB, FILEGROWTH=0),
(NAME=MSSQL_cs70, FILENAME='z:\dev\c070', SIZE=30000MB, FILEGROWTH=0),
(NAME=MSSQL_cs71, FILENAME='z:\dev\c071', SIZE=30000MB, FILEGROWTH=0),
(NAME=MSSQL_cs72, FILENAME='z:\dev\c072', SIZE=30000MB, FILEGROWTH=0)
LOG ON
(NAME=MSSQL_tpcc_log, FILENAME='z:\dev\log\', SIZE=200000MB, FILEGROWTH=0),
(NAME=MSSQL_tpcc_log2, FILENAME='z:\dev\log2\', SIZE=200000MB, FILEGROWTH=0),
(NAME=MSSQL_tpcc_log3, FILENAME='z:\dev\log3\', SIZE=200000MB, FILEGROWTH=0)
COLLATE Latin1_General_BIN
go

-- Store ending time
update tpcc_timer
set end_date = (select convert(char(30), getdate(),9))
go

select "Elapsed time (in seconds): ", datediff(second,(select start_date from
tpcc_timer),(select end_date from tpcc_timer))

-- remove temporary table

if exists ( select name from sysobjects where name = 'tpcc_timer' )
drop table tpcc_timer
go
```

dbopt1.sql

```
-- File: DBOPT1.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Sets database options for data load
```

```
use master
go

exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
exec sp_dboption tpcc,'torn page detection',false
go

use tpcc
go

checkpoint
go
```

dbopt2.sql

```
-- File: DBOPT2.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Resets database options after data load
```

```
exec sp_dboption tpcc,'select into/bulkcopy',false
exec sp_dboption tpcc,'trunc. log on chkpt.',false
exec sp_dboption tpcc,'torn page detection',false
go
```

```
USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates',1
GO
```

```
RECONFIGURE WITH OVERRIDE
GO
```

```
DECLARE @msg varchar(50)
```

```
--
-- OPTIONS FOR SQL SERVER 2000
-- Set option values for user-defined indexes
--
SET @msg = ' '
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ' '
PRINT @msg
```

```
EXEC sp_indexoption 'customer', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'district', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'warehouse', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'stock', 'DisallowPageLocks', TRUE
EXEC sp_indexoption 'order_line', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'orders', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'new_order', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowRowLocks', TRUE
EXEC sp_indexoption 'item', 'DisallowPageLocks', TRUE
GO
```

```
Print ' '
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print ' LockFlag = 0 ==> No pre-specified hierarchy'
Print ' LockFlag = 1 ==> Lock at Page-level then Table-level'
Print ' LockFlag = 2 ==> Lock at Row-level then Table-level'
Print ' LockFlag = 3 ==> Lock at Table-level'
Print ' '

```

```
SELECT name,lockflags
FROM sysindexes
WHERE object_id('warehouse') = id OR
object_id('district') = id OR
object_id('customer') = id OR
object_id('stock') = id OR
object_id('orders') = id OR
object_id('order_line') = id OR
object_id('history') = id OR
object_id('new_order') = id OR
object_id('item') = id
ORDER BY lockflags asc
GO
```

```
sp_configure 'allow updates',0
GO
```

```
RECONFIGURE WITH OVERRIDE
GO
```

```
EXEC sp_dboption tpcc, 'auto update statistics', FALSE
EXEC sp_dboption tpcc, 'auto create statistics', FALSE
GO
```

```
EXEC sp_tableoption 'district', 'pintable',true
EXEC sp_tableoption 'warehouse', 'pintable',true
EXEC sp_tableoption 'new_order', 'pintable',true
EXEC sp_tableoption 'item', 'pintable',true
GO
```

idxcuscl.sql

```
-- File: IDXCUSCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on customer table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'customer_c1' )
drop index customer.customer_c1

create unique clustered index customer_c1 on customer(c_w_id, c_d_id, c_id)
on MSSQL_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go
```

idxcusnc.sql

```
-- File: IDXCUSNC.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Creates non-clustered index on customer table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'customer_nc1' )
drop index customer.customer_nc1
```

```
create unique nonclustered index customer_nc1 on customer(c_w_id, c_d_id, c_last,
c_first, c_id)
on MSSQL_cs_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

idxdiscl.sql

```
-- File: IDXDISCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on district table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'district_c1' )
drop index district.district_c1
```

```
create unique clustered index district_c1 on district(d_w_id, d_id)
with fillfactor=100 on MSSQL_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

idxhiscl.sql

```
-- File:      IDXHISCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on history table
--
-- CAUTION:  *****
-- CAUTION:  This index is only beneficial for systems
-- CAUTION:  with 8 or more processors.
-- CAUTION:  It may negatively impact performance on
-- CAUTION:  on systems with less than 8 processors.
-- CAUTION:  *****
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'history_c1' )
drop index history.history_c1
```

```
create unique clustered index history_c1 on history(h_c_w_id, h_date, h_c_d_id,
h_c_id, h_amount)
on MSSQL_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

idxitmcl.sql

```
-- File:      IDXITMCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on item table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'item_c1' )
drop index item.item_c1
```

```
create unique clustered index item_c1 on item(i_id)
on MSSQL_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

idxnodcl.sql

```
-- File:      IDXNODCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on new_order table
```

```
use tpcc
```

```
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'new_order_c1' )
drop index new_order.new_order_c1
```

```
create unique clustered index new_order_c1 on new_order(no_w_id, no_d_id,
no_o_id)
on MSSQL_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

idxodlcl.sql

```
-- File:      IDXODLCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on order_line table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'order_line_c1' )
drop index order_line.order_line_c1
```

```
create unique clustered index order_line_c1 on order_line(o_l_w_id, o_l_d_id,
o_l_o_id, o_l_number)
on MSSQL_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

idxordcl.sql

```
-- File:      IDXORDCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on orders table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'orders_c1' )
drop index orders.orders_c1
```

```
create unique clustered index orders_c1 on orders(o_w_id, o_d_id, o_id)
on MSSQL_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

idxordnc.sql

```
-- File:      IDXORDNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates non-clustered index on orders table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'orders_nc1' )
drop index orders.orders_nc1
```

```
create index orders_nc1 on orders(o_w_id, o_d_id, o_c_id, o_id)
on MSSQL_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

idxstkcl.sql

```
-- File:      IDXSTKCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on stock table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'stock_c1' )
drop index stock.stock_c1
```

```
create unique clustered index stock_c1 on stock(s_i_id, s_w_id)
on MSSQL_cs_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)
```

```
go
```

idxwarcl.sql

```
-- File:      IDXWARCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on warehouse table
```

```
use tpcc
go
```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'warehouse_c1' )
drop index warehouse.warehouse_c1

create unique Clustered index warehouse_c1 on warehouse(w_id)
with fillfactor=100 on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate, @enddate)

go

```

removedb.sql

```

-- File: REMOVEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Removes tpcc database and backup files

use master
go

-- remove any existing database and backup files

exec sp_dbrremove tpcc, dropdev
go

exec sp_dropdevice 'tpccback01'
exec sp_dropdevice 'tpccback02'
exec sp_dropdevice 'tpccback03'
exec sp_dropdevice 'tpccback04'
exec sp_dropdevice 'tpccback05'
exec sp_dropdevice 'tpccback06'
exec sp_dropdevice 'tpccback07'
exec sp_dropdevice 'tpccback08'
exec sp_dropdevice 'tpccback09'
exec sp_dropdevice 'tpccback10'
exec sp_dropdevice 'tpccback11'
exec sp_dropdevice 'tpccback12'
exec sp_dropdevice 'tpccback13'
exec sp_dropdevice 'tpccback14'
exec sp_dropdevice 'tpccback15'
exec sp_dropdevice 'tpccback16'
exec sp_dropdevice 'tpccback17'
exec sp_dropdevice 'tpccback18'
exec sp_dropdevice 'tpccback19'
exec sp_dropdevice 'tpccback20'
exec sp_dropdevice 'tpccback21'
exec sp_dropdevice 'tpccback22'
exec sp_dropdevice 'tpccback23'
exec sp_dropdevice 'tpccback24'
exec sp_dropdevice 'tpccback25'
exec sp_dropdevice 'tpccback26'
exec sp_dropdevice 'tpccback27'
exec sp_dropdevice 'tpccback28'
exec sp_dropdevice 'tpccback29'
exec sp_dropdevice 'tpccback30'
exec sp_dropdevice 'tpccback31'
exec sp_dropdevice 'tpccback32'
exec sp_dropdevice 'tpccback33'
exec sp_dropdevice 'tpccback34'
exec sp_dropdevice 'tpccback35'
exec sp_dropdevice 'tpccback36'
exec sp_dropdevice 'tpccback37'
exec sp_dropdevice 'tpccback38'
exec sp_dropdevice 'tpccback39'
exec sp_dropdevice 'tpccback40'
exec sp_dropdevice 'tpccback41'
exec sp_dropdevice 'tpccback42'
exec sp_dropdevice 'tpccback43'
exec sp_dropdevice 'tpccback44'
exec sp_dropdevice 'tpccback45'
exec sp_dropdevice 'tpccback46'

```

```

exec sp_dropdevice 'tpccback47'
exec sp_dropdevice 'tpccback48'
exec sp_dropdevice 'tpccback49'
exec sp_dropdevice 'tpccback50'
exec sp_dropdevice 'tpccback51'
exec sp_dropdevice 'tpccback52'
exec sp_dropdevice 'tpccback53'
exec sp_dropdevice 'tpccback54'

```

tables.sql

```

-- File: TABLES.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.42
-- Copyright Microsoft, 2002
-- Purpose: Creates TPC-C tables

SET ANSI_NULL_DFLT_OFF ON
go

use tpcc
go

--
-- Remove all existing TPC-C tables
--

if exists ( select name from sysobjects where name = 'warehouse' )
drop table warehouse
go

if exists ( select name from sysobjects where name = 'district' )
drop table district
go

if exists ( select name from sysobjects where name = 'customer' )
drop table customer
go

if exists ( select name from sysobjects where name = 'history' )
drop table history
go

if exists ( select name from sysobjects where name = 'new_order' )
drop table new_order
go

if exists ( select name from sysobjects where name = 'orders' )
drop table orders
go

if exists ( select name from sysobjects where name = 'order_line' )
drop table order_line
go

if exists ( select name from sysobjects where name = 'item' )
drop table item
go

if exists ( select name from sysobjects where name = 'stock' )
drop table stock
go

--
-- Create new tables
--

create table warehouse
(
    w_id int,
    w_name char(10),
    w_street_1 char(20),
    w_street_2 char(20),
    w_city char(20),
    w_state char(2),
    w_zip char(9),
    w_tax numeric(4,4),
    w_ytd numeric(12,2)
) on MSSQL_misc_fg
go

create table district
(
    d_id tinyint,
    d_w_id int,
    d_name char(10),
    d_street_1 char(20),
    d_street_2 char(20),
    d_city char(20),
    d_state char(2),

```

```

    d_zip char(9),
    d_tax numeric(4,4),
    d_ytd numeric(12,2),
    d_next_o_id int
) on MSSQL_misc_fg
go

create table customer
(
    c_id int,
    c_d_id tinyint,
    c_w_id int,
    c_first char(16),
    c_middle char(2),
    c_last char(16),
    c_street_1 char(20),
    c_street_2 char(20),
    c_city char(20),
    c_state char(2),
    c_zip char(9),
    c_phone char(16),
    c_since datetime,
    c_credit char(2),
    c_credit_lim numeric(12,2),
    c_discount numeric(4,4),
    c_balance numeric(12,2),
    c_ytd_payment numeric(12,2),
    c_payment_cnt smallint,
    c_delivery_cnt smallint,
    c_data char(500)
) on MSSQL_cs_fg
go

create table history
(
    h_c_id int,
    h_c_d_id tinyint,
    h_c_w_id int,
    h_d_id tinyint,
    h_w_id int,
    h_date datetime,
    h_amount numeric(6,2),
    h_data char(24)
) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id int,
    no_d_id tinyint,
    no_w_id int
) on MSSQL_misc_fg
go

create table orders
(
    o_id int,
    o_d_id tinyint,
    o_w_id int,
    o_c_id int,
    o_entry_d datetime,
    o_carrier_id tinyint,
    o_ol_cnt tinyint,
    o_all_local tinyint
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id int,
    ol_d_id tinyint,
    ol_w_id int,
    ol_number tinyint,
    ol_i_id int,
    ol_supply_w_id int,
    ol_delivery_d datetime,
    ol_quantity smallint,
    ol_amount numeric(6,2),
    ol_dist_info char(24)
) on MSSQL_misc_fg
go

create table item
(

```

```

i_id
i_im_id
i_name
i_price
i_data
) on MSSQL_misc_fg
go

create table stock
(
    s_i_id
    s_w_id
    s_quantity
    s_dist_01
    s_dist_02
    s_dist_03
    s_dist_04
    s_dist_05
    s_dist_06
    s_dist_07
    s_dist_08
    s_dist_09
    s_dist_10
    s_ytd
    s_order_cnt
    s_remote_cnt
    s_data
) on MSSQL_cs_fg
go

```

```

int,
int,
char(24),
numeric(5,2),
char(50)

int,
int,

int,
int,
char(50)

```

```

select rowcnt
from sysindexes
where id =object_id("orders")
go

print 'HISTORY TABLE = (30,000 * No of warehouses) '

select rowcnt
from sysindexes
where id =object_id("history")
go

print 'STOCK TABLE = (100,000 * No of warehouses) '

select rowcnt
from sysindexes
where id =object_id("stock")
go

print 'ORDER_LINE TABLE = (300,000 * No of warehouses + some change) '

select rowcnt
from sysindexes
where id =object_id("order_line")
go

print 'NEW_ORDER TABLE = (9000 * No of warehouses) '

select rowcnt
from sysindexes
where id =object_id("new_order")
go

-- *****
-- Check indices
-- *****

print '*****Index Check*****'

use tpcc
go

sp_helpindex customer
go

sp_helpindex stock
go

sp_helpindex district
go

sp_helpindex item
go

sp_helpindex new_order
go

sp_helpindex orders
go

sp_helpindex order_line
go

sp_helpindex warehouse
go

sp_helpindex history
go

```

Stored Procedures

delivery.sql

```

-- File: DELIVERY.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.42
-- Copyright Microsoft, 2002

```

```

-- Purpose: Creates delivery transaction stored procedure
--
-- Interface Level: 4.10.000

use tpcc
go

if exists (select name from sysobjects where name = 'tpcc_delivery' )
drop procedure tpcc_delivery
go

create proc tpcc_delivery @w_id int,
                        @o_carrier_id smallint
as
declare @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
        @oid3 int,
        @oid4 int,
        @oid5 int,
        @oid6 int,
        @oid7 int,
        @oid8 int,
        @oid9 int,
        @oid10 int

select @d_id = 0

begin tran d
    while (@d_id < 10)
    begin
        select @d_id = @d_id + 1,
               @total = 0,
               @o_id = 0

        select top 1
               @o_id = no_o_id
        from new_order (serializable uplock)
        where no_w_id = @w_id and
              no_d_id = @d_id
        order by no_o_id asc

        if (@@rowcount <> 0)
        begin
            -- claim the order for this district

            delete new_order
            where no_w_id = @w_id and
                  no_d_id = @d_id and
                  no_o_id = @o_id

            -- set carrier_id on this order (and get customer id)

            update orders
            set o_carrier_id =
                @o_carrier_id,
                @c_id
            where o_w_id
                = @w_id and
                o_d_id
                = @d_id and
                o_id
                = @o_id

            -- set date in all lineitems for this order (and sum amounts)

            update order_line
            set ol_delivery_d = getdate(),
                @total
            where ol_w_id
                = @total + ol_amount
                = @w_id and
                ol_d_id
                = @d_id and

```

VerifyTpccLoad.sql

```

-- File: VERIFYTPCCLOAD.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Performs series of TPCC database checks to verify
-- that database load completed correctly

print " "
select convert(char(30), getdate(),9)
print " "

use tpcc
go

-- *****
-- Check rows per table from SYSINDEXES
-- *****

print 'WAREHOUSE TABLE '

select rowcnt
from sysindexes
where id = object_id("warehouse")
go

print 'DISTRICT TABLE = (10 * No of warehouses) '

select rowcnt
from sysindexes
where id =object_id("district")
go

print 'ITEM TABLE = 100,000 '

select rowcnt
from sysindexes
where id =object_id("item")
go

print 'CUSTOMER TABLE = (30,000 * No of warehouses) '

select rowcnt
from sysindexes
where id =object_id("customer")
go

print 'ORDERS TABLE = (30,000 * No of warehouses) '

```

```

        = @o_id                                o1_o_id
-- accumulate lineitem amounts for this order into customer
update      customer
set         c_balance = c_balance +
@total,
           update      customer
           set         c_balance = c_balance +
           where      C_w_id
           where      C_d_id
           where      C_id
           end
select @oid1 = case @d_id when 1 then @o_id else @oid1 end,
@oid2 = case @d_id when 2 then @o_id else @oid2 end,
@oid3 = case @d_id when 3 then @o_id else @oid3 end,
@oid4 = case @d_id when 4 then @o_id else @oid4 end,
@oid5 = case @d_id when 5 then @o_id else @oid5 end,
@oid6 = case @d_id when 6 then @o_id else @oid6 end,
@oid7 = case @d_id when 7 then @o_id else @oid7 end,
@oid8 = case @d_id when 8 then @o_id else @oid8 end,
@oid9 = case @d_id when 9 then @o_id else @oid9 end,
@oid10 = case @d_id when 10 then @o_id else @oid10 end
end
commit tran d
-- return delivery data to client
select @oid1,
@oid2,
@oid3,
@oid4,
@oid5,
@oid6,
@oid7,
@oid8,
@oid9,
@oid10
go

```

neword.sql

```

-- File: NEWORD.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.42
-- Copyright Microsoft, 2002
-- Purpose: Creates new order transaction stored procedure
--
-- Interface Level: 4.10.000
use tpcc
go
if exists ( select name from sysobjects where name = 'tpcc_neworder' )
drop procedure tpcc_neworder
go
create proc tpcc_neworder
@w_id tinyint,
@d_id tinyint,
@c_id tinyint,
@o_o1_cnt tinyint,
@o_all_local tinyint,
@i_id1 int = 0,
@s_w_id1 int = 0,
@o1_qty1 smallint = 0,
@i_id2 int = 0,
@s_w_id2 int = 0,
@o1_qty2 smallint = 0,

```

```

@i_id3 int = 0,
@s_w_id3 int = 0,
@o1_qty3 smallint = 0,
@i_id4 int = 0,
@s_w_id4 int = 0,
@o1_qty4 smallint = 0,
@i_id5 int = 0,
@s_w_id5 int = 0,
@o1_qty5 smallint = 0,
@i_id6 int = 0,
@s_w_id6 int = 0,
@o1_qty6 smallint = 0,
@i_id7 int = 0,
@s_w_id7 int = 0,
@o1_qty7 smallint = 0,
@i_id8 int = 0,
@s_w_id8 int = 0,
@o1_qty8 smallint = 0,
@i_id9 int = 0,
@s_w_id9 int = 0,
@o1_qty9 smallint = 0,
@i_id10 int = 0,
@s_w_id10 int = 0,
@o1_qty10 smallint = 0,
@i_id11 int = 0,
@s_w_id11 int = 0,
@o1_qty11 smallint = 0,
@i_id12 int = 0,
@s_w_id12 int = 0,
@o1_qty12 smallint = 0,
@i_id13 int = 0,
@s_w_id13 int = 0,
@o1_qty13 smallint = 0,
@i_id14 int = 0,
@s_w_id14 int = 0,
@o1_qty14 smallint = 0,
@i_id15 int = 0,
@s_w_id15 int = 0,
as
declare @w_tax numeric(4,4),
@d_tax numeric(4,4),
@c_last char(16),
@c_credit char(2),
@c_discount numeric(4,4),
@i_price numeric(5,2),
@i_name char(24),
@i_data char(50),
@o_entry_d datetime,
@remote_flag int,
@s_quantity smallint,
@s_data char(50),
@s_dist char(24),
@li_no int,
@o_id int,
@commit_flag tinyint,
@li_id int,
@li_s_w_id int,
@li_qty smallint,
@o1_number int,
@c_id_local int
begin
begin transaction n
-- get district tax and next available order id and update
-- plus initialize local variables
update      district
set         @d_tax = d_tax,
@o_id = d_next_o_id,
d_next_o_id = d_next_o_id + 1,
@o_entry_d = getdate(),
@li_no = 0,
@commit_flag = 1
where      d_w_id = @w_id and
d_id = @d_id
-- process orderlines
while (@li_no < @o_o1_cnt)
begin
select @li_no = @li_no + 1
-- set i_id, s_w_id, and qty for this lineitem
select @li_id = case @li_no
when 1 then @i_id1
when 2 then @i_id2
when 3 then @i_id3
when 4 then @i_id4
when 5 then @i_id5
when 6 then @i_id6

```

```

when 7 then @i_id7
when 8 then @i_id8
when 9 then @i_id9
when 10 then @i_id10
when 11 then @i_id11
when 12 then @i_id12
when 13 then @i_id13
when 14 then @i_id14
when 15 then @i_id15
end,
@li_s_w_id = case @li_no
when 1 then @s_w_id1
when 2 then @s_w_id2
when 3 then @s_w_id3
when 4 then @s_w_id4
when 5 then @s_w_id5
when 6 then @s_w_id6
when 7 then @s_w_id7
when 8 then @s_w_id8
when 9 then @s_w_id9
when 10 then
when 11 then
when 12 then
when 13 then
when 14 then
when 15 then
end,
@li_qty = case @li_no
when 1 then @o1_qty1
when 2 then @o1_qty2
when 3 then @o1_qty3
when 4 then @o1_qty4
when 5 then @o1_qty5
when 6 then @o1_qty6
when 7 then @o1_qty7
when 8 then @o1_qty8
when 9 then @o1_qty9
when 10 then @o1_qty10
when 11 then @o1_qty11
when 12 then @o1_qty12
when 13 then @o1_qty13
when 14 then @o1_qty14
when 15 then @o1_qty15
end
-- get item data (no one updates item)
select @i_price = i_price,
@i_name = i_name,
@i_data = i_data
from item (tablock repeatableread)
where i_id = @i_id
-- update stock values
update      stock
set         s_ytd = s_ytd +
@li_qty,
@s_quantity = s_quantity +
s_quantity - @li_qty +
case when (s_quantity - @li_qty < 10) then 91 else 0 end,
s_order_cnt = s_order_cnt + 1,
s_remote_cnt = s_remote_cnt + case when
(@li_s_w_id = @w_id) then 0 else 1 end,
@s_data = s_data,
@s_dist = case @d_id
when 1
when 2
when 3
when 4
when 5
when 6

```

```

when 5
then s_dist_05
when 6
then s_dist_06
when 7
then s_dist_07
when 8
then s_dist_08
when 9
then s_dist_09
when 10
then s_dist_10
end
where s_i_id = @li_id and
s_w_id = @li_s_w_id
-- if there actually is a stock (and item) with these ids, go to work
if (@@rowcount > 0)
begin
-- insert order_line data (using data from item and stock)
insert into order_line values(@o_id,
@d_id,
@w_id,
@li_no,
@li_id,
@li_s_w_id,
'dec 31, 1899',
@li_qty,
@i_price * @li_qty,
@s_dist)
-- send line-item data to client
select @i_name,
@s_quantity,
b_g = case when
( patindex('%ORIGINAL%',@i_data) > 0) and
(patindex('%ORIGINAL%',@s_data) > 0)
then 'B' else 'G'
end,
@i_price,
@i_price * @li_qty
end
else
begin
-- no item (or stock) found - triggers rollback condition
select '',0','','0,0
select @commit_flag = 0
end
end
-- get customer last name, discount, and credit rating
select @c_last = c_last,
@c_discount = c_discount,
@c_credit = c_credit,
@c_id_local = c_id
from customer (repeatableread)
where c_id = @c_id and
c_w_id = @w_id and
c_d_id = @d_id
-- insert fresh row into orders table
insert into orders values ( @o_id,
@d_id,
@w_id,

```

```

@c_id_local,
@o_entry_d,
0,
@o_ol_cnt,
@o_all_local)
-- insert corresponding row into new-order table
insert into new_order values ( @o_id,
@d_id,
@w_id)
-- select warehouse tax
select @w_tax = w_tax
from warehouse (repeatableread)
where w_id = @w_id
if (@commit_flag = 1)
commit transaction n
else
rollback transaction n
-- all that work for nuthin!!!
-- return order data to client
select @w_tax,
@d_tax,
@o_id,
@c_last,
@c_discount,
@c_credit,
@o_entry_d,
@commit_flag
end
go
ordstat.sql
-- File: ORDDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.42
-- Copyright Microsoft, 2002
-- Purpose: Creates order status transaction stored procedure
-- Interface Level: 4.10.000
use tpcc
go
if exists ( select name from sysobjects where name = 'tpcc_orderstatus' )
drop procedure tpcc_orderstatus
go
create proc tpcc_orderstatus @w_id int,
@d_id tinyint,
@c_id int,
@c_last char(16) = ''
as
declare @c_balance numeric(12,2),
@c_first char(16),
@c_middle char(2),
@o_id int,
@o_entry_d datetime,
@o_carrier_id smallint,
@cnt smallint
begin tran o
if (@c_id = 0)
begin
-- get customer id and info using last name

```

```

select @cnt = (count(*)+1)/2
from customer (repeatableread)
where c_last = @c_last and
c_w_id = @w_id and
c_d_id = @d_id
set @rowcount = @cnt
select @c_id = c_id,
@c_balance = c_balance,
@c_first = c_first,
@c_last = c_last,
@c_middle = c_middle
from customer (repeatableread)
where c_last = @c_last and
c_w_id = @w_id and
c_d_id = @d_id
order by c_w_id, c_d_id, c_last, c_first
set @rowcount = 0
end
else
begin
-- get customer info if by id
select @c_balance = c_balance,
@c_first = c_first,
@c_middle = c_middle,
@c_last = c_last
from customer (repeatableread)
where c_id = @c_id and
c_d_id = @d_id and
c_w_id = @w_id
select @cnt = @@rowcount
end
-- if no such customer
if (@cnt = 0)
begin
raiserror('Customer not found',18,1)
goto custnotfound
end
-- get order info
select @o_id = o_id,
@o_entry_d = o_entry_d,
@o_carrier_id = o_carrier_id
from orders (serializable)
where o_c_id = @c_id and
o_d_id = @d_id and
o_w_id = @w_id
order by o_id asc
-- select order lines for the current order
select ol_supply_w_id,
ol_i_id,
ol_quantity,
ol_amount,
ol_delivery_d
from order_line (repeatableread)
where ol_o_id = @o_id and
ol_d_id = @d_id and
ol_w_id = @w_id
custnotfound:
commit tran o
-- return data to client
select @c_id,
@c_last,
@c_first,
@c_middle,

```

```

        @o_entry_d,
        @o_carrier_id,
        @c_balance,
        @o_id
go

payment.sql
-- File: PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.42
-- Copyright Microsoft, 2002
-- Purpose: Creates payment transaction stored procedure
-- Interface Level: 4.10.000

use tpc
go

if exists (select name from sysobjects where name = 'tpcc_payment' )
drop procedure tpcc_payment
go

create proc tpcc_payment @w_id int,
                        @c_w_id int,
                        @h_amount numeric(6,2),
                        @d_id tinyint,
                        @c_d_id tinyint,
                        @c_id int,
                        @c_last char(16) =
as
declare @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city char(20),
        @w_state char(2),
        @w_zip char(9),
        @w_name char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city char(20),
        @d_state char(2),
        @d_zip char(9),
        @d_name char(10),
        @c_first char(16),
        @c_middle char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city char(20),
        @c_state char(2),
        @c_zip char(9),
        @c_phone char(16),
        @c_since datetime,
        @c_credit char(2),
        @c_credit_lim numeric(12,2),
        @c_balance numeric(12,2),
        @c_discount numeric(4,4),
        @data char(500),
        @c_data char(500),
        @datetime datetime,
        @w_ytd numeric(12,2),
        @d_ytd numeric(12,2),
        @cnt smallint,
        @val smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local int,
        @c_id_local int

select @screen_data = ''

begin tran p

-- get payment date
select @datetime = getdate()

if (@c_id = 0)

```

```

begin
-- get customer id and info using last name

select @cnt = count(*)
from customer (repeatableread)
where c_last = @c_last and
       c_w_id = @c_w_id and
       c_d_id = @c_d_id

select @val = (@cnt + 1) / 2
set rowcount @val

select @c_id = c_id
from customer (repeatableread)
where c_last = @c_last and
       c_w_id = @c_w_id and
       c_d_id = @c_d_id
order by c_last, c_first

set rowcount 0

end

-- get customer info and update balances

update customer
set @c_balance = c_balance - @h_amount,
    @c_payment_cnt = c_payment_cnt + 1,
    @c_ytd_payment = c_ytd_payment + @h_amount,
    @c_first = c_first,
    @c_middle = c_middle,
    @c_last = c_last,
    @c_street_1 = c_street_1,
    @c_street_2 = c_street_2,
    @c_city = c_city,
    @c_state = c_state,
    @c_zip = c_zip,
    @c_phone = c_phone,
    @c_credit = c_credit,
    @c_credit_lim = c_credit_lim,
    @c_discount = c_discount,
    @c_since = c_since,
    @data = c_data,
    @c_id_local = c_id

where c_id = @c_id and
       c_w_id = @c_w_id and
       c_d_id = @c_d_id

-- if customer has bad credit get some more info
if (@c_credit = 'BC')
begin
-- compute new info
select @c_data = convert(char(5),@c_id) +
                convert(char(4),@c_d_id)
+
                convert(char(5),@c_w_id)
+
                convert(char(4),@d_id) +
                convert(char(5),@w_id) +
convert(char(19),@h_amount) +
                substrings(@data, 1, 458)

-- update customer info
update customer
set @c_data = @c_data

where c_id = @c_id and
       c_w_id = @c_w_id and
       c_d_id = @c_d_id

select @screen_data = substrings (@c_data,1,200)

end

-- get district data and update year-to-date

update district
set @d_ytd = d_ytd + @h_amount,
    @d_street_1 = d_street_1,

```

```

        @d_street_2 = d_street_2,
        @d_city = d_city,
        @d_state = d_state,
        @d_zip = d_zip,
        @d_name = d_name,
        @d_id_local = d_id

where @d_w_id = @w_id and
       @d_id = @d_id

-- get warehouse data and update year-to-date

update warehouse
set @w_ytd = w_ytd + @h_amount,
    @w_street_1 = w_street_1,
    @w_street_2 = w_street_2,
    @w_city = w_city,
    @w_state = w_state,
    @w_zip = w_zip,
    @w_name = w_name,
    @w_id_local = w_id

where @w_id = @w_id

-- create history record

insert into history values (@c_id_local,
                           @c_d_id,
                           @c_w_id,
                           @d_id_local,
                           @w_id_local,
                           @datetime,
                           @h_amount,
                           @w_name + '
' + @d_name)
commit tran p

-- return data to client

select @c_id,
       @c_last,
       @datetime,
       @w_street_1,
       @w_street_2,
       @w_city,
       @w_state,
       @w_zip,
       @d_street_1,
       @d_street_2,
       @d_city,
       @d_state,
       @d_zip,
       @c_first,
       @c_middle,
       @c_street_1,
       @c_street_2,
       @c_city,
       @c_state,
       @c_zip,
       @c_phone,
       @c_since,
       @c_credit,
       @c_credit_lim,
       @c_discount,
       @c_balance,
       @screen_data

go

stocklev.sql
-- File: STOCKLEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.42
-- Copyright Microsoft, 2002
-- Purpose: Creates stock level transaction stored procedure
-- Interface Level: 4.10.000

use tpc
go

if exists (select name from sysobjects where name = 'tpcc_stocklevel' )
drop procedure tpcc_stocklevel

```

```

go

create proc tpcc_stocklevel          @w_id      int,
                                     @d_id      tinyint,
                                     @threshold smallint

as

declare      @o_id_low int,
             @o_id_high int

select      @o_id_low = (d_next_o_id - 20),
            @o_id_high = (d_next_o_id - 1)

from        district

where       d_w_id      = @w_id and
            d_id        = @d_id

select      count(distinct(s_i_id))
from        stock, order_line
where       o1_w_id    = @w_id and
            o1_d_id    = @d_id and
            o1_o_id    between @o_id_low and
                           @o_id_high and
            s_w_id     = o1_w_id and
            s_i_id     = o1_i_id and
            s_quantity < @threshold

go

```

Loader Source Code

./buildia64.cmd

```

@if "%ECHOON%"==" " echo off

setlocal

REM
REM Setup environment variables
REM

if /I "%DRIVE%" == "" set DRIVE=d:
if /I "%ROOT%" == "" set ROOT=%DRIVE%
if /I "%SPHINX%" == "" set SPHINX=%ROOT%\shiloh
if /I "%SQLTOOLS%" == "" set SQLTOOLS=%ROOT%\sqltools
if /I "%MSVC%" == "" set MSVC=%SQLTOOLS%\msdev\vc98
if /I "%SHAREDIDE%" == "" set SHAREDIDE=%SQLTOOLS%\msdev\common\msdev98
if /I "%COMMON%" == "" set COMMON=%SPHINX%\common
if /I "%MSSDK%" == "" set MSDK=%DRIVE%\msdk

REM Sanity checks
if not exist %SPHINX% echo %SPHINX% cannot be found&goto usage
if not exist %MSDK%\bin\win64\cl.exe echo 64-bit compiler cannot be found
in %MSDK%\bin\win64&goto usage
if not exist %SQLTOOLS% echo SQLTOOLS not found in %SQLTOOLS%&goto usage
if not exist %MSVC% echo Visual C not found in %MSVC%&goto usage
if not exist %SHAREDIDE% echo Visual Studio Common files not found
in %SHAREDIDE%&goto usage

set BUILDCFGDEBUG="tpccldr - win64 Debug"
set BUILDCFGRELEASE="tpccldr - win64 Release"

REM Set some defaults
set BUILDCFG=%BUILDCFGRELEASE%
set MFLAGS=

:nextparm
if "%1" == "" goto noparm
if "%1" == "-" goto usage
if "%1" == "/" goto usage
if "%1" == "debug" set BUILDCFG=%BUILDCFGDEBUG% & goto shift
if "%1" == "DEBUG" set BUILDCFG=%BUILDCFGRELEASE% & goto shift
if "%1" == "normal" set BUILDCFG=%BUILDCFGRELEASE% & goto shift
if "%1" == "NORMAL" set BUILDCFG=%BUILDCFGRELEASE% & goto shift
if "%1" == "-a" set MFLAGS=%1
if "%1" == "-c" set MFLAGS=%1
if "%1" == "clean" set MFLAGS=%1
if "%1" == "CLEAN" set MFLAGS=%1

:shift
shift
goto nextparm

:noparm

pushd %MSDK%
call Setwin64.bat
popd

REM Override Important Stuff...
set include=%COMMON%\include;%include%
set lib=%COMMON%\%CPU%\lib\retail;%lib%

call nmake -f tpccldr.mak CFG=%BUILDCFG% %MFLAGS%

```

```

goto leave

:usage
echo.
echo Usage: %0 [type] [flags]
echo.
echo 'type' is one of:
echo          debug
echo          normal
echo.
echo 'flags' is zero or more of:
echo          -a      build all
echo          -c      cleans up crufty bits
echo          -?      display this message
echo.

:leave
endlocal

```

./tpccldr.mak

```

# Microsoft Developer Studio Generated NMAKE File, Format Version 4.10
# ** DO NOT EDIT **

# TARGETTYPE "win32 (x86) Console Application" 0x0103

IF "$(CFG)" == ""
CFG=tpccldr - win32 Debug
!MESSAGE No configuration specified. Defaulting to tpccldr - win32 Debug.
!ENDIF

IF "$(CFG)" != "tpccldr - win32 Release" && "$(CFG)" != \
"tpccldr - win32 Debug"
!MESSAGE Invalid configuration "$(CFG)" specified.
!MESSAGE You can specify a configuration when running NMAKE on this makefile
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE NMAKE /f "tpccldr.mak" CFG="tpccldr - win32 Debug"
!MESSAGE Possible choices for configuration are:
!MESSAGE "tpccldr - win32 Release" (based on "win32 (x86) Console Application")
!MESSAGE "tpccldr - win32 Debug" (based on "win32 (x86) Console Application")
!MESSAGE
!ERROR An invalid configuration is specified.
!ENDIF

IF "$(OS)" == "Windows_NT"
NULL=
!ELSE
NULL=nul
!ENDIF
#####
# Begin Project
# PROP Target_Last_Scanned "tpccldr - win32 Debug"
RSC=rc.exe
CPP=cl.exe

IF "$(CFG)" == "tpccldr - win32 Release"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir "bin"
# PROP Intermediate_Dir "objects"
# PROP Target_Dir ""
OUTDIR=. \bin
INTDIR=. \objects

ALL : "$(OUTDIR)\tpccldr.exe"

CLEAN :
-@erase "$(INTDIR)\getargs.obj"
-@erase "$(INTDIR)\random.obj"
-@erase "$(INTDIR)\strings.obj"
-@erase "$(INTDIR)\time.obj"
-@erase "$(OUTDIR)\tpccldr.exe"

"$$(OUTDIR)\" :
if not exist "$$(OUTDIR)\$(NULL)" mkdir "$$(OUTDIR)"

"$$(INTDIR)\" :
if not exist "$(INTDIR)\$(NULL)" mkdir "$$(INTDIR)"

# ADD BASE CPP /nologo /w3 /gm /Gx /Zi /od /d "WIN32" /d "_DEBUG" /d "_CONSOLE" /YX /c
# ADD CPP /nologo /MT /w3 /Gm /Gx /Zi /od /I "c:\mssql\sql\include" /D
"_DEBUG" /D "WIN32" /D "_CONSOLE" /D "DBNTWIN32" /c
# SUBTRACT CPP /YX
CPP_PROJ=/nologo /MT /G2 /O3 /Qipo /I "c:\mssql\sql\include" /D "NDEBUG" /D
"WIN32" /D "_CONSOLE" /D "DBNTWIN32" /Fo"$$(INTDIR)\" /c
CPP_SBRS= \
CPP_OBJS= \objects\
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$$(OUTDIR)\tpccldr.bsc"
BSC32_SBRS= \

LINK32=xilink.exe

```

```

# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
/nologo /subsystem:console /machine:i386
# ADD LINK32 ntwdlib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
odbccp32.lib /nologo /subsystem:console /pdb:none /machine:i386
LINK32_FLAGS=odbc32.lib ntwdlib.lib kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib\
uuid.lib odbccp32.lib odbccp32.lib /nologo /subsystem:console /pdb:none\
/machine:IA64 /out:"$(OUTDIR)\tpccldr.exe"
LINK32_OBJS= \
$(INTDIR)\getargs.obj \
$(INTDIR)\random.obj \
$(INTDIR)\strings.obj \
$(INTDIR)\time.obj \
$(INTDIR)\tpccldr.obj

"$$(OUTDIR)\tpccldr.exe" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
$(LINK32) @<<
$(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ELSEIF "$(CFG)" == "tpccldr - win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir "bin"
# PROP Intermediate_Dir "objects"
# PROP Target_Dir ""
OUTDIR=. \bin
INTDIR=. \objects

ALL : "$(OUTDIR)\tpccldr.exe"

CLEAN :
-@erase "$(INTDIR)\getargs.obj"
-@erase "$(INTDIR)\random.obj"
-@erase "$(INTDIR)\strings.obj"
-@erase "$(INTDIR)\time.obj"
-@erase "$(OUTDIR)\tpccldr.obj"
-@erase "$(OUTDIR)\vc40.pdb"
-@erase "$(OUTDIR)\tpccldr.exe"

"$$(OUTDIR)\" :
if not exist "$$(OUTDIR)\$(NULL)" mkdir "$$(OUTDIR)"

"$$(INTDIR)\" :
if not exist "$(INTDIR)\$(NULL)" mkdir "$$(INTDIR)"

# ADD BASE CPP /nologo /w3 /gm /Gx /Zi /od /d "WIN32" /d "_DEBUG" /d "_CONSOLE"
/YX /c
# ADD CPP /nologo /MT /w3 /Gm /Gx /Zi /od /I "c:\mssql\sql\include" /D
"_DEBUG" /D "WIN32" /D "_CONSOLE" /D "DBNTWIN32" /c
# SUBTRACT CPP /YX
CPP_PROJ=/nologo /MT /w3 /Gm /Gx /Zi /od /I "c:\mssql\sql\include" /D\
"_DEBUG" /D "WIN32" /D "_CONSOLE" /D "DBNTWIN32" /Fo"$$(INTDIR)\" /\
/FD"$$(INTDIR)\" /c
CPP_OBJS= \objects\
CPP_SBRS= \
# ADD BASE RSC /l 0x409 /d "DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$$(OUTDIR)\tpccldr.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
/nologo /subsystem:console /debug /machine:i386
# ADD LINK32 ntwdlib.lib kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbccp32.lib
odbccp32.lib /nologo /subsystem:console /pdb:none /debug /machine:i386
LINK32_FLAGS=odbc32.lib ntwdlib.lib kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib\
uuid.lib odbccp32.lib odbccp32.lib /nologo /subsystem:console /pdb:none /debug\
/machine:i386 /out:"$(OUTDIR)\tpccldr.exe"
LINK32_OBJS= \
$(INTDIR)\getargs.obj \
$(INTDIR)\random.obj \
$(INTDIR)\strings.obj \
$(INTDIR)\time.obj \
$(INTDIR)\tpccldr.obj

"$$(OUTDIR)\tpccldr.exe" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
$(LINK32) @<<
$(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ENDIF

.c{$(CPP_OBJS)}.obj:
$(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_OBJS)}.obj:
$(CPP) $(CPP_PROJ) $<

.cxx{$(CPP_OBJS)}.obj:
$(CPP) $(CPP_PROJ) $<

.c{$(CPP_SBRS)}.sbr:
$(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_SBRS)}.sbr:
$(CPP) $(CPP_PROJ) $<

```

```

.cxx{$(CPP_SBRS)}.sbr:
$(CPP) $(CPP_PROJ) $<
#####
# Begin Target
# Name "tpccldr - win32 Release"
# Name "tpccldr - win32 Debug"
IF "$(CFG)" == "tpccldr - win32 Release"
!ELSEIF "$(CFG)" == "tpccldr - win32 Debug"
!ENDIF
#####
# Begin Source File
SOURCE=.\\src\\random.c
DEP_CPP_RANDO=\\src\\tpcc.h"
"\\msql\\dblib\\include\\sqldb.h"\\
"\\msql\\dblib\\include\\sqlfront.h"\\
"$(INTDIR)\\random.obj" : $(SOURCE) $(DEP_CPP_RANDO) "$(INTDIR)
$(CPP) $(CPP_PROJ) $(SOURCE)
# End Source File
#####
# Begin Source File
SOURCE=.\\src\\strings.c
DEP_CPP_STRIN=\\src\\tpcc.h"
"\\msql\\dblib\\include\\sqldb.h"\\
"\\msql\\dblib\\include\\sqlfront.h"\\
"$(INTDIR)\\strings.obj" : $(SOURCE) $(DEP_CPP_STRIN) "$(INTDIR)
$(CPP) $(CPP_PROJ) $(SOURCE)
# End Source File
#####
# Begin Source File
SOURCE=.\\src\\time.c
DEP_CPP_TIME=\\src\\tpcc.h"
"\\msql\\dblib\\include\\sqldb.h"\\
"\\msql\\dblib\\include\\sqlfront.h"\\
"$(INTDIR)\\time.obj" : $(SOURCE) $(DEP_CPP_TIME) "$(INTDIR)
$(CPP) $(CPP_PROJ) $(SOURCE)
# End Source File
#####
# Begin Source File
SOURCE=.\\src\\tpccldr.c
DEP_CPP_TPCC=\\src\\tpcc.h"
"\\msql\\dblib\\include\\sqldb.h"\\
"\\msql\\dblib\\include\\sqlfront.h"\\
"$(INTDIR)\\tpccldr.obj" : $(SOURCE) $(DEP_CPP_TPCC) "$(INTDIR)
$(CPP) $(CPP_PROJ) $(SOURCE)
# End Source File
#####
# Begin Source File
SOURCE=.\\src\\getargs.c
DEP_CPP_GETAR=\\src\\tpcc.h"
"\\msql\\dblib\\include\\sqldb.h"\\
"\\msql\\dblib\\include\\sqlfront.h"\\
"$(INTDIR)\\getargs.obj" : $(SOURCE) $(DEP_CPP_GETAR) "$(INTDIR)
$(CPP) $(CPP_PROJ) $(SOURCE)
# End Source File
# End Target
# End Project
#####

```

./src/getargs.c

```

// File: GETARGS.C Microsoft TPC-C Kit Ver.
// 4.20 Copyright Microsoft, 1996,
// 1997, 1998, 1999
// Purpose: Source file for command line processing
// Includes
#include "tpcc.h"

```

```

//=====
// Function name: GetArgsLoader
//=====
void GetArgsLoader(int argc, char **argv, TPCC_LDR_ARGS *pargs)
{
    int i;
    char *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int) GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server = SERVER;
    pargs->user = USER;
    pargs->password = PASSWORD;
    pargs->database = DATABASE;
    pargs->batch = BATCH;
    pargs->num_warehouses = UNDEF;
    pargs->tables_all = TRUE;
    pargs->table_item = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer = FALSE;
    pargs->table_orders = FALSE;
    pargs->loader_res_file = LOADER_RES_FILE;
    pargs->pack_size = DEFLDPACKSIZE;
    pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
    pargs->build_index = BUILD_INDEX;
    pargs->index_order = INDEX_ORDER;
    pargs->index_script_path = INDEX_SCRIPT_PATH;
    pargs->scale_down = SCALE_DOWN;

    /* check for zero command line args */
    if (argc == 1)
        GetArgsLoaderUsage();

    for (i = 1; i < argc; ++i)
    {
        if (argv[i][0] != '-' && argv[i][0] != '/')
            printf("\nunrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];
    switch (ptr[1])
    {
        case 'h': /* Fall through */
            GetArgsLoaderUsage();
            break;
        case 'd':
            pargs->database = ptr+2;
            break;
        case 'p':
            pargs->password = ptr+2;
            break;
        case 's':
            pargs->server = ptr+2;
            break;
        case 'u':
            pargs->user = ptr+2;
            break;
        case 'b':
            pargs->batch = ptr+2;
            break;
        case 'w':
            pargs->num_warehouses = ptr+2;
            break;
        case 's':
            pargs->starting_warehouse = ptr+2;
            break;
        case 't':
            pargs->tables_all = TRUE;
            break;
        case 'i':
            pargs->table_item = TRUE;
            break;
        case 'w':
            pargs->table_warehouse = TRUE;
            break;
        case 'c':
            pargs->customer = TRUE;
            break;
        case 'o':
            pargs->orders = TRUE;
            break;
        case 'l':
            pargs->loader_res_file = ptr+2;
            break;
        case 'k':
            pargs->pack_size = ptr+2;
            break;
        case 's':
            pargs->starting_warehouse = ptr+2;
            break;
        case 'i':
            pargs->build_index = ptr+2;
            break;
        case 'o':
            pargs->index_order = ptr+2;
            break;
        case 'c':
            pargs->scale_down = ptr+2;
            break;
        case 'd':
            pargs->index_script_path = ptr+2;
            break;
        default:
            GetArgsLoaderUsage();
            exit(-1);
            break;
    }
}

```

```

{
    printf("\nunrecognized command");
    GetArgsLoaderUsage();
    exit(1);
    break;
}

ptr+2;
case 'f':
    pargs->loader_res_file = ptr+2;
    break;
case 'p':
    pargs->pack_size = ptr+2;
    break;
case 'i':
    pargs->build_index = ptr+2;
    break;
case 'o':
    pargs->index_order = ptr+2;
    break;
case 'c':
    pargs->scale_down = ptr+2;
    break;
case 'd':
    pargs->index_script_path = ptr+2;
    break;
default:
    GetArgsLoaderUsage();
    exit(-1);
    break;
}

/* check for required args */
if (pargs->num_warehouses == UNDEF)
{
    printf("Number of warehouses is required\n");
    exit(-2);
}

return;
}

//=====
// Function name: GetArgsLoaderUsage
//=====
void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

    printf("TPCC_LDR:\n");
    printf("Parameter\n");
    printf("-----\n");
    printf("-w Number of warehouses to Load Required \n");
    printf("-s Server %s\n", SERVER);
    printf("-u Username %s\n", USER);
    printf("-p Password %s\n", PASSWORD);
    printf("-d Database %s\n", DATABASE);
    printf("-b Batch %d\n", (long) BATCH);
    printf("-p TDS packet %d\n", (long) BATCH);
    printf("-f Loader Results Output %d\n", (long) DEFLDPACKSIZE);
    printf("-c Cluster index Build order (before = 1, after = 0) %d\n", (long) INDEX_ORDER);
    printf("-c Build Scaled database (normal = 0, tiny = 1) %d\n", (long) SCALE_DOWN);
    printf("-d Index Script %s\n", INDEX_SCRIPT_PATH);
    printf("-t Table to Load %d\n", (long) DEF_STARTING_WAREHOUSE);
    printf("-i Build Option (data = 0, data and index = 1) %d\n", (long) BUILD_INDEX);
    printf("-o Cluster index Build order (before = 1, after = 0) %d\n", (long) INDEX_ORDER);
    printf("-c Build Scaled database (normal = 0, tiny = 1) %d\n", (long) SCALE_DOWN);
    printf("-d Index Script %s\n", INDEX_SCRIPT_PATH);
    printf("-t Table to Load %d\n", (long) DEF_STARTING_WAREHOUSE);
    printf(" [item|warehouse|customer|orders]\n");
    printf(" Notes: \n");
    printf(" - the '-t' parameter may be included multiple times to \n");
    printf(" specify multiple tables to be loaded \n");
    printf(" - 'item' loads ITEM table \n");
    printf(" - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \n");
}

```

```

printf(" - 'customer' loads CUSTOMER and HISTORY tables \n");
printf(" - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \n");
printf("\nNote: Command line switches are case sensitive.\n");
exit(0);
}

```

.src/random.c

```

// File: RANDOM.C Microsoft TPC-C Kit Ver.
// 4.20 Copyright Microsoft, 1996,
// 1997, 1998, 1999 Purpose: Random number generation routines for database loader
// Includes
#include "tpcc.h"
#include "math.h"
// Defines
#define A 16807
#define M 2147483647
#define Q 127773 /* M div A */
#define R 2836 /* M mod A */
#define Thread __declspec(thread)
// Globals
long Thread Seed = 0; /* thread local seed */
/*
 * random -
 * Implements a GOOD pseudo random number generator. This generator
 * will/should run the complete period before repeating.
 * Copied from:
 * Random Numbers Generators: Good Ones Are Hard to Find.
 * Communications of the ACM - October 1988 volume 31 Number 10
 * Machine Dependencies:
 * long must be 2 ^ 31 - 1 or greater.
 */
/*
 * seed - load the Seed value used in irand and drand. should be used before
 * first call to irand or drand.
 */
void seed(long val)
{
#ifdef DEBUG
printf("[%ld]DBG: Entering seed...\n", (int) GetCurrentThreadId());
printf("old Seed %ld New Seed %ld\n", seed, val);
#endif
if (val < 0)
val = abs(val);
seed = val;
}
/*
 * irand - returns a 32 bit integer pseudo random number with a period of
 * 1 to 2 ^ 32 - 1.
 * parameters:
 * none.
 * returns:
 * 32 bit integer - defined as long ( see above ).
 * side effects:
 * seed get recomputed.
 */
long irand()
{
register long s; /* copy of seed */
register long test; /* test flag */
register long hi; /* tmp value for speed */
register long lo; /* tmp value for speed */
#ifdef DEBUG
printf("[%ld]DBG: Entering irand...\n", (int) GetCurrentThreadId());
#endif
s = Seed;
hi = s / Q;
lo = s % Q;
test = A * lo - R * hi;
if ( test > 0 )
Seed = test;
else
Seed = test + M;
return( Seed );
}

```

```

}
/*
 * drand - returns a double pseudo random number between 0.0 and 1.0.
 * See irand.
 */
double drand()
{
#ifdef DEBUG
printf("[%ld]DBG: Entering drand...\n", (int) GetCurrentThreadId());
#endif
return( (double)irand() / 2147483647.0);
}
// Function : RandomNumber
// Description:
// RandomNumber(long lower, long upper)
{
long rand_num;
#ifdef DEBUG
printf("[%ld]DBG: Entering RandomNumber...\n", (int) GetCurrentThreadId());
#endif
if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
return lower;
upper++;
if ( upper <= lower )
rand_num = upper;
else
rand_num = lower + irand() % (upper - lower); /* pgd
08-13-96 perf enhancement */
#ifdef DEBUG
printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
(int) GetCurrentThreadId(),
lower, upper, rand_num);
#endif
return rand_num;
}
#if 0
//Original code pgd 08/13/96
long RandomNumber(long lower, long upper)
{
long rand_num;
#ifdef DEBUG
printf("[%ld]DBG: Entering RandomNumber...\n", (int) GetCurrentThreadId());
#endif
upper++;
if ((upper <= lower))
rand_num = upper;
else
rand_num = lower + irand() % ((upper > lower) ? upper
- lower : upper);
#ifdef DEBUG
printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
(int) GetCurrentThreadId(),
lower, upper, rand_num);
#endif
return rand_num;
}
// Function : NURand
// Description:
// NURand(int iCONST, long x, long y, long C)
{
long rand_num;
#ifdef DEBUG
printf("[%ld]DBG: Entering NURand...\n", (int) GetCurrentThreadId());
#endif
rand_num = (((RandomNumber(0, iCONST) | RandomNumber(x,y)) + C) % (y-x+1))+x;
#ifdef DEBUG
printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(),
rand_num);
#endif
}

```

.src/strings.c

```

// File: STRINGS.C Microsoft TPC-C Kit Ver.
// 4.20 Copyright Microsoft, 1996,
// 1997, 1998, 1999 Purpose: Source file for database loader string functions
// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>
// Function name: MakeAddress
// MakeAddress(char *street_1, char *street_2, char *city, char *state, char *zip)
{
#ifdef DEBUG
printf("[%ld]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif
MakeAlphaString(10, 20, ADDRESS_LEN, street_1);
MakeAlphaString(10, 20, ADDRESS_LEN, street_2);
MakeAlphaString(10, 20, ADDRESS_LEN, city);
MakeAlphaString(2, 2, STATE_LEN, state);
MakeZipNumberString(9, 9, ZIP_LEN, zip);
#ifdef DEBUG
printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s,
state: %s, zip: %s\n", (int) GetCurrentThreadId(), street_1,
street_2, city, state, zip);
#endif
return;
}
// Function name: LastName
// LastName(int num, char *name)
{
static char *n[] =
{
"BAR", "OUGHT", "ABLE", "PRI", "PRES",
"ESE", "ANTI", "CALLV", "ATION", "EING"
};
#ifdef DEBUG
printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif
if ((num >= 0) && (num < 1000))
{
strcpy(name, n[(num/100)%10]);
strcat(name, n[(num/10)%10]);
strcat(name, n[(num/1)%10]);
if (strlen(name) < LAST_NAME_LEN)
PaddString(LAST_NAME_LEN, name);
}
else
{
printf("\nError in LastName()... num <%ld> out of
range (0,999)\n", num);
exit(-1);
}
#ifdef DEBUG
printf("[%ld]DBG: LastName: num = [%ld] ==> [%ld][%ld][%ld]\n",
(int) GetCurrentThreadId(), num, num/100,
(num/10)%10, num%10);
printf("[%ld]DBG: LastName: String = %s\n", (int)
GetCurrentThreadId(), name);
#endif
return;
}
}

```

```

=====
// Function name: MakeAlphaString
//
=====
// philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
// accordance with spec see below:
// The spec says:
// 4.3.2.2 The notation random a-string [x..y]
// (respectively, n-string [x..y]) represents a string of random alphanumeric
// (respectively, numeric) characters of a random length of minimum x, maximum y,
// and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
// requirement is that the character set used "must be able to represent a
// minimum
// of 128 different characters". We are using 8-bit chars, so this is a non
// issue.
// It is completely unreasonable to stuff non-printing chars into the text fields.
// --Clevine 08/13/96
int MakeAlphaString(int x, int y, int z, char *str)
{
    int len;
    char cc = 'a';
    static char chArray[] = "0123456789ABCDEFHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int)
    GetCurrentThreadId());
#endif

    len = RandomNumber(x, y);
    for (i=0; i<len; i++)
    {
        cc = chArray[RandomNumber(0, chArrayMax)];
        str[i] = cc;
    }
    if ( len < z )
        memset(str+len, ' ', z - len);
    str[len] = 0;

    return len;
}

=====
// Function name: MakeOriginalAlphaString
//
=====
int MakeOriginalAlphaString(int x,
int y,
int z,
char *str,
int percent)
{
    int len;
    int val;
    int start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
    GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid
percentage: %d\n", percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if ((x + y) <= 8)
    {
        printf("MakeOriginalAlphaString: string length must
be >= 8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);
    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
(int) GetCurrentThreadId(), str);
#endif

    return (int)strlen(str);
}

=====

```

```

// Function name: MakeNumberString
//
=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

// MakeNumberString is always called MakeZipNumberString(16, 16, 16,
string)

    memset(str, '0', 16);
    _itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    _itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

=====
// Function name: MakeZipNumberString
//
=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

// MakeZipNumberString is always called MakeZipNumberString(9, 9, 9,
string)

    strcpy(str, "00001111");
    _itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

=====
// Function name: InitString
//
=====
void InitString(char *str, int len)
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif
{
    memset(str, ' ', len);
    str[len] = 0;
}

=====
// Function name: InitAddress
//
// Description:
//
=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char
*zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

=====
// Function name: PaddString
//
=====
void PaddString(int max, char *name)
{
    size_t len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

./src/time.c

```

// File: TIME.C Microsoft TPC-C Kit Ver.
// 4.20 Copyright Microsoft, 1996,
// 1997, 1998, 1999 Source file for time functions
// Purpose:

// Includes
#include "tpcc.h"

// Global's
static time_t start_sec;

=====
// Function name: TimeNow
//
=====
time_t TimeNow()
{
    time_t time_now;
    struct _timeb el_time;

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

./src/tpcc.h

```

// File: TPCC.H Microsoft TPC-C Kit Ver.
// 4.41 Copyright Microsoft, 1996,
// 1997, 1998, 1999, 2000, 2001 Header file for TPC-C database loader
// Purpose:

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.41"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys/timeb.h>
#include <sys/types.h>

// ODBC headers
#include <sql.h>
#include <sqltext.h>
#include <odbc.h>

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"
#define USER "sa"
#define PASSWORD ""

// Default loader arguments
#define BATCH 10000
#define DEF_LOADPACKSIZE 32768
#define LOADER_RES_FILE "c:\\MSTPCC.442\\SETUP\\logs\\load.out"
#define LOADER_LOG_PATH "c:\\MSTPCC.442\\SETUP\\LOGS\\";
#define LOADER_MURAND_C 123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX 1
#define INDEX_ORDER 1 // build both data and indexes
#define SCALE_DOWN 0 // build a normal scale database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char *server;

```

```

char          *database;
char          *user;
char          *password;

BOOL          tables_all;
BOOL          table_item;
BOOL          table_warehouse;
and STOCK
and HISTORY
long          num_warehouses;
long          batch;
long          verbose;

long          pack_size;
char          *loader_res_file;
char          *log_path;
char          *synch_servername;
long          case_sensitivity;
long          starting_warehouse;
long          build_index;
long          index_order;
long          scale_down;
char          *index_script_path;
} TPCC_LDR_ARGS;

// String length constants
#define SERVER_NAME_LEN      20
#define DATABASE_NAME_LEN   20
#define USER_NAME_LEN       20
#define PASSWORD_LEN        20
#define TABLE_NAME_LEN     20
#define I_DATA_LEN          50
#define I_NAME_LEN           24
#define BRAND_LEN            1
#define LAST_NAME_LEN        16
#define W_NAME_LEN           10
#define ADDRESS_LEN          20
#define STATE_LEN            2
#define ZIP_LEN              9
#define S_DIST_LEN           24
#define S_DATA_LEN           50
#define D_NAME_LEN           10
#define FIRST_NAME_LEN       16
#define MIDDLE_NAME_LEN      2
#define PHONE_LEN            16
#define CREDIT_LEN           2
#define C_DATA_LEN           500
#define H_DATA_LEN           24
#define DIST_INFO_LEN        15
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN           24
#define OL_DIST_INFO_LEN     24
#define C_SINCE_LEN          23
#define H_DATE_LEN           23
#define OL_DELIVERY_D_LEN    23
#define O_ENTRY_D_LEN        23

// Functions in random.c
void seed();
long irand();
double drand();
void wUCreate();
void wURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
void MakeAlphaString();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

```

```

#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS              100000
#define MAXITEMS_SCALE_DOWN  100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT  3000
#define ORDERS_SCALE_DOWN    30
#define MAX_CUSTOMER_THREADS  2
#define MAX_ORDER_THREADS    3
#define MAX_MAIN_THREADS      4

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);
void CheckDataBase();

long NURand();
void LoadItem();
void Loadwarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrderTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures
typedef struct
{
    long          ol;
    long          ol_i_id;
    long          ol_supply_w_id;
    short         ol_quantity;
    double        ol_amount;
    char          ol_dist_info [DIST_INFO_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long          o_id;
    short         o_d_id;
    long          o_w_id;
    long          o_c_id;
    short         o_carrier_id;
    short         o_ol_cnt;
    short         o_all_local;
} ORDER_LINE_STRUCT o_ol[15];

} ORDERS_STRUCT;

typedef struct
{
    long          c_id;
    short         c_d_id;
    long          c_w_id;

    char          c_first [FIRST_NAME_LEN+1];
    char          c_middle [MIDDLE_NAME_LEN+1];
    char          c_last [LAST_NAME_LEN+1];
    char          c_street_1 [ADDRESS_LEN+1];
    char          c_street_2 [ADDRESS_LEN+1];
    char          c_city [ADDRESS_LEN+1];
    char          c_state [STATE_LEN+1];
    char          c_zip [ZIP_LEN+1];
    char          c_phone [PHONE_LEN+1];
    char          c_credit [CREDIT_LEN+1];
    double        c_discount;

    // fix to avoid ODBC float to numeric conversion problem.
    // double
    char          c_balance;
    double        c_balance[6];

    double        c_ytd_payment;
    short         c_payment_cnt;
    short         c_delivery_cnt;
    char          c_data [C_DATA_LEN+1];
    double        h_amount;
    char          h_data [H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char          c_last [LAST_NAME_LEN+1];
    char          c_first [FIRST_NAME_LEN+1];

```

```

long          c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long          time_start;
} LOADER_TIME_STRUCT;

// Global variables
char          szLastError[300];
HENV          henv;
HDBC          v_hdbc;
HDBC          i_hdbc1;
HDBC          w_hdbc1;
HDBC          c_hdbc1;
HDBC          c_hdbc2;
HDBC          o_hdbc1;
HDBC          o_hdbc2;
HDBC          o_hdbc3;
HDBC          o_hdbc4;
HSTMT         v_hstmt;
HSTMT         l_hstmt1;
HSTMT         w_hstmt1;
HSTMT         c_hstmt1;
HSTMT         o_hstmt1;
HSTMT         o_hstmt2;
HSTMT         o_hstmt3;

ORDERS_STRUCT orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long          orders_rows_loaded;
long          new_order_rows_loaded;
long          order_line_rows_loaded;
long          history_rows_loaded;
long          customer_rows_loaded;
long          stock_rows_loaded;
long          district_rows_loaded;
long          item_rows_loaded;
long          warehouse_rows_loaded;
long          main_time_start;
long          main_time_end;
long          max_items;
long          customers_per_district;
long          orders_per_district;
long          first_new_order;
long          last_new_order;

TPCC_LDR_ARGS *aptr, args;

// =====
// Function name: main
// =====

int main(int argc, char *argv)
{
    DWORD        dwThreadId[MAX_MAIN_THREADS];
    HANDLE        hThread[MAX_MAIN_THREADS];
    FILE          *fLoader;
    char          buffer[255];
    int          i;
    int          num_procs;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");
    printf("\n*");
    printf("\n* Microsoft SQL Server");
    printf("\n*");
    printf("\n* TPC-C BENCHMARK KIT: Database loader");
    printf("\n*");
    printf("\n* Version %s");
    TPCKIT_VER);
    printf("\n*");
    printf("\n*****\n\n");

    // process command line arguments
    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

    // verify database and tables exist before attempting to load
    //CheckDataBase();

    printf("build interface is ODBC.\n");
    if (aptr->build_index == 0)
        printf("Data load only - no index creation.\n");
    else
        printf("Data load and index creation.\n");

    if (aptr->index_order == 0)
        printf("Clustered indexes will be created after bulk
load.\n");
    else
        printf("Clustered indexes will be created before bulk

```

./src/tpcldr.c

```

// File: TPCC_LDR.C Microsoft TPC-C Kit Ver.
// 4.41 Copyright Microsoft, 1996,
// 1997, 1998, 1999, 2000, 2001
// Purpose: Source file for TPC-C database loader

// Includes

```

```

load.\n");
// set database scale values
if (aptr->scale_down == 1)
{
    printf("*** Scaled Down Database ***\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district = CUSTOMERS_SCALE_DOWN;
    orders_per_district = ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// if build index before load
// start creating index
if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    if (aptr->tables_all || aptr->table_item)
        BuildIndex("idxitmc1");

    if (aptr->tables_all || aptr->table_warehouse)
    {
        BuildIndex("idxwarc1");
        BuildIndex("idxdisc1");
        BuildIndex("idxstkc1");
    }

    if (aptr->tables_all || aptr->table_customer)
    {
        BuildIndex("idxcuscl");
        // check the number of processors on
        // this system
        // if 8 or more processors, then build
        // index on History.
        // if less than 8 processors, do not
        // build the index
        //num_procs =
        atoi(getenv("NUMBER_OF_PROCESSORS"));
        //if ( num_procs >= 8 )
        BuildIndex("idxhsc1");
    }

    if (aptr->tables_all || aptr->table_orders)
    {
        BuildIndex("idxordc1");
        BuildIndex("idxnodc1");
        BuildIndex("idxodc1");
    }
}

// start loading data
sprintf(buffer, "TPC-C load started for %ld warehouses.\n", aptr->num_warehouses);
printf("%s", buffer);
fprintf(fLoader, "%s", buffer);
main_time_start = (TimeNow() / MILLI);
// start parallel load threads

if (aptr->tables_all || aptr->table_item)
{
    if (aptr->tables_all || aptr->table_warehouse)
    {
        hThread[0] = CreateThread(NULL,
            0,
            (LPTHREAD_START_ROUTINE) LoadItem,
            NULL,
            0,
            &dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating
            creating thread = 0.\n");
            exit(-1);
        }
    }
}

```

```

        if (aptr->tables_all || aptr->table_warehouse)
        {
            warehouse\n");
            fprintf(fLoader, "Starting loader threads for:
            hThread[1] = CreateThread(NULL,
                0,
                (LPTHREAD_START_ROUTINE) LoadWarehouse,
                NULL,
                0,
                &dwThreadID[1]);

            if (hThread[1] == NULL)
            {
                printf("Error, failed in creating
                creating thread = 1.\n");
                exit(-1);
            }
        }

        if (aptr->tables_all || aptr->table_customer)
        {
            customer\n");
            fprintf(fLoader, "Starting loader threads for:
            hThread[2] = CreateThread(NULL,
                0,
                (LPTHREAD_START_ROUTINE) LoadCustomer,
                NULL,
                0,
                &dwThreadID[2]);

            if (hThread[2] == NULL)
            {
                printf("Error, failed in creating
                creating main thread = 2.\n");
                exit(-1);
            }
        }

        if (aptr->tables_all || aptr->table_orders)
        {
            orders\n");
            fprintf(fLoader, "Starting loader threads for:
            hThread[3] = CreateThread(NULL,
                0,
                (LPTHREAD_START_ROUTINE) LoadOrders,
                NULL,
                0,
                &dwThreadID[3]);

            if (hThread[3] == NULL)
            {
                printf("Error, failed in creating
                creating main thread = 3.\n");
                exit(-1);
            }
        }

        // Wait for threads to finish..
        for (i=0; i<MAX_MAIN_THREADS; i++)
        {
            if (hThread[i] != NULL)
            {
                INFINITE );
                WaitForSingleObject( hThread[i],
                CloseHandle(hThread[i]);
                hThread[i] = NULL;
            }
        }

        main_time_end = (TimeNow() / MILLI);
        sprintf(buffer, "\nTPC-C load completed successfully in %ld minutes.\n",
            (main_time_end - main_time_start)/60);

        printf("%s", buffer);
        fprintf(fLoader, "%s", buffer);
        fclose(fLoader);
        SQLFreeEnv(henv);

        exit(0);
        return 0;
    }

//=====
// Function name: LoadItem
//=====
void LoadItem()

```

```

{
    long i_id;
    char double i_name, i_im_id;
    char i_name[I_NAME_LEN+1];
    char i_price;
    char i_data[I_DATA_LEN+1];
    char name[20];
    long time_start;
    long rc;
    DBINT rcint;
    char err_log_path[128];
    char err_log_path[256];

    // Seed with unique number
    seed(1);

    printf("Loading item table...\n");
    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);
    sprintf(name, "%s.%s", aptr->database, "item");

    //rc = bcp_init(i_hdbc1, name, NULL, "logs\\item.err", DB_IN);
    strcpy(err_log_path, aptr->log_path);
    strcat(err_log_path, "item.err");
    rc = bcp_init(i_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        ROWS_PER_BATCH = 100000);
        sprintf(bcphint, "tablock, order (i_id,
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(i_hdbc1);
    }

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT4, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL,
    0, SQLINT4, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0,
    3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL,
    0, SQLFLT8, 4);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, I_DATA_LEN, NULL, 0, 0,
    5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    time_start = (TimeNow() / MILLI);
    item_rows_loaded = 0;
    for (i_id = 1; i_id <= max_items; i_id++)
    {
        i_im_id = RandomNumber(1L, 10000L);
        MakeAlphaString(14, 24, I_NAME_LEN, i_name);
        i_price = ((float) RandomNumber(100L, 10000L))/100.0;
        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data,
        10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEEDED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded,
        "item", &time_start);
    }

    rcint = bcp_done(i_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");
    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmc1");
}

//=====
// Function : Loadwarehouse
// Loads WAREHOUSE table and loads Stock and District as warehouses are created
//=====

```

```

void LoadWarehouse()
{
    long w_id;
    char w_name[W_NAME_LEN+1];
    char w_street_1[ADDRESS_LEN+1];
    char w_street_2[ADDRESS_LEN+1];
    char w_city[ADDRESS_LEN+1];
    char w_state[STATE_LEN+1];
    char w_zip[ZIP_LEN+1];
    double w_tax;
    double w_ytd;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcint;
    char bcphint[128];
    char err_log_path[256];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\n");

    InitString(w_name, W_NAME_LEN+1);
    InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);
    sprintf(name, "%s.%s", apr->database, "warehouse");

    //rc = bcp_init(w_hdbc1, name, NULL, "logs\\warehouse.err", DB_IN);
    strcpy(err_log_path, apr->log_path);
    strcat(err_log_path, "warehouse.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (w_id),
ROWS_PER_BATCH = %d", apr->num_warehouses);
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCESS)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0,
2);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL,
0, 0, 3);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL,
0, 0, 4);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0,
5);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0,
6);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, 7);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 8);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    time_start = (TimeNow() / MILLI);
    warehouse_rows_loaded = 0;

    for (w_id = apr->starting_warehouse; w_id <= apr->
>num_warehouses; w_id++)
    {
        MakeAlphaString(6,10, W_NAME_LEN, w_name);
        MakeAddress(w_street_1, w_street_2, w_city, w_state,
w_zip);
        w_tax = ((float) RandomNumber(0L,2000L))/10000.00;
        w_ytd = 300000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCESS)
            HandleErrorDBC(w_hdbc1);

        warehouse_rows_loaded++;
        CheckForCommit(w_hdbc1, i_hstmt1,
warehouse_rows_loaded, "warehouse", &time_start);
    }
}

```

```

}
rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxwarc1");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();
}

//=====
// Function : District
//=====
void District()
{
    short d_id;
    long d_w_id;
    char d_name[D_NAME_LEN+1];
    char d_street_1[ADDRESS_LEN+1];
    char d_street_2[ADDRESS_LEN+1];
    char d_city[ADDRESS_LEN+1];
    char d_state[STATE_LEN+1];
    char d_zip[ZIP_LEN+1];
    double d_tax;
    double d_ytd;
    char name[20];
    long d_next_o_id;
    long time_start;
    w_id;
    RETCODE rc;
    DBINT rcint;
    char bcphint[128];
    char err_log_path[256];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
    sprintf(name, "%s.%s", apr->database, "district");

    //rc = bcp_init(w_hdbc1, name, NULL, "logs\\district.err", DB_IN);
    strcpy(err_log_path, apr->log_path);
    strcat(err_log_path, "district.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (d_w_id, d_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 10));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCESS)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 1);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 2);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0,
3);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL,
0, 0, 4);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL,
0, 0, 5);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0,
6);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0,
7);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, 8);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);
}

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
if (rc != SUCCESS)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 10);
if (rc != SUCCESS)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 11);
if (rc != SUCCESS)
    HandleErrorDBC(w_hdbc1);

d_ytd = 300000.00;
d_next_o_id = orders_per_district+1;
time_start = (TimeNow() / MILLI);

for (w_id = apr->starting_warehouse; w_id <= apr->
>num_warehouses; w_id++)
{
    d_w_id = w_id;
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE;
d_id++)
    {
        MakeAlphaString(6,10,D_NAME_LEN,
d_name);
        MakeAddress(d_street_1, d_street_2,
d_city, d_state, d_zip);
        d_tax = ((float)
RandomNumber(0L,2000L))/10000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCESS)
            HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading district table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxdiscl1");

return;
}

//=====
// Function : Stock
//=====
void Stock()
{
    long s_i_id;
    long s_w_id;
    short s_quantity;
    char s_dist_01[S_DIST_LEN+1];
    char s_dist_02[S_DIST_LEN+1];
    char s_dist_03[S_DIST_LEN+1];
    char s_dist_04[S_DIST_LEN+1];
    char s_dist_05[S_DIST_LEN+1];
    char s_dist_06[S_DIST_LEN+1];
    char s_dist_07[S_DIST_LEN+1];
    char s_dist_08[S_DIST_LEN+1];
    char s_dist_09[S_DIST_LEN+1];
    char s_dist_10[S_DIST_LEN+1];
    long s_ytd;
    short s_order_cnt;
    short s_remote_cnt;
    char s_data[S_DATA_LEN+1];
    len;
    char name[20];
    long time_start;
    rc;
    RETCODE rcint;
    DBINT rcint;
    char bcphint[128];
    char err_log_path[256];

    // Seed with unique number
    seed(3);

    sprintf(name, "%s.%s", apr->database, "stock");

    //rc = bcp_init(w_hdbc1, name, NULL, "logs\\stock.err", DB_IN);
    strcpy(err_log_path, apr->log_path);
    strcat(err_log_path, "stock.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCESS)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 10000));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    }
}

```

```

        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);
    }
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0,
0, 4);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0,
0, 5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0,
0, 6);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0,
0, 7);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0,
0, 8);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0,
0, 9);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0,
0, 10);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0,
0, 11);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0,
0, 12);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0,
0, 13);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 14);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 15);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 16);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, S_DATA_LEN, NULL, 0, 0,
17);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    s_ytd = s_order_cnt = s_remote_cnt = 0;
    time_start = (TimeNow() / MILLI);
    printf("...Loading stock table\n");
    for (s_i_id=1; s_i_id <= max_items; s_i_id++)
    {
        for (s_w_id = apr->starting_warehouse; s_w_id <=
aptr->num_warehouses; s_w_id++)
        {
            s_quantity =
(short)RandomNumber(10L,100L);
            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_01);
            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_02);
            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_03);
            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_04);

```

```

            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_05);
            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_06);
            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_07);
            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_08);
            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_09);
            len = MakeAlphaString(24,24,S_DIST_LEN,
s_dist_10);
            len = MakeOriginalAlphaString(26,50,
S_DATA_LEN, s_data,10);
            rc = bcp_sendrow(w_hdbc1);
            if (rc != SUCCEEDED)
                HandleErrorDBC(w_hdbc1);
            stock_rows_loaded++;
            CheckForCommit(w_hdbc1, w_hstmt1,
stock_rows_loaded, "stock", &time_start);
        }
    }
    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);
    printf("Finished loading stock table.\n");
    SQLFreeStmt(w_hstmt1, SQL_DROP);
    SQLDisconnect(w_hdbc1);
    SQLFreeConnect(w_hdbc1);
    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxstk1");
    return;
}
//=====
// Function : LoadCustomer
//=====
void LoadCustomer()
{
    LOADER_TIME_STRUCT customer_time_start;
    LOADER_TIME_STRUCT history_time_start;
    long d_id;
    short
        DWORD dwThreadId[MAX_CUSTOMER_THREADS];
        HANDLE hThread[MAX_CUSTOMER_THREADS];
        char RETCODE rc;
        DBINT rcint;
        char bcphint[128];
        char cmd[256];
        int num_procs;
        char err_log_path_cust[256];
        char err_log_path_hist[256];
        // SQLRETURN rc_1;
        // SQLSMALLINT recnum, MsgLen;
        // SQLCHAR SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
        // SQLINTEGER NativeError;
        // Seed with unique number
        seed(5);
        printf("Loading customer and history tables...\n");
        // Initialize bulk copy
        sprintf(name, "%s.%s", apr->database, "customer");
        //rc = bcp_init(c_hdbc1, name, NULL, "logs\\customer.err", DB_IN);
        strcpy(err_log_path_cust, apr->log_path);
        strcat(err_log_path_cust, "customer.err");
        rc = bcp_init(c_hdbc1, name, NULL, err_log_path_cust, DB_IN);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);
        if ((aptr->build_index == 1) && (aptr->index_order == 1))
        {
            sprintf(bcphint, "tablock, order (c_w_id, c_d_id,
c_id), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
            if (rc != SUCCEEDED)
                HandleErrorDBC(c_hdbc1);
        }
        printf(name, "%s.%s", apr->database, "history");
        rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
        strcpy(err_log_path_hist, apr->log_path);
        strcat(err_log_path_hist, "history.err");

```

```

        rc = bcp_init(c_hdbc2, name, NULL, err_log_path_hist, DB_IN);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);
        sprintf(bcphint, "tablock");
        rc = bcp_control(c_hdbc2, BCP_HINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);
        customer_rows_loaded = 0;
        history_rows_loaded = 0;
        CustomerBufInit();
        customer_time_start.time_start = (TimeNow() / MILLI);
        history_time_start.time_start = (TimeNow() / MILLI);
        for (w_id = apr->starting_warehouse; w_id <= apr->
num_warehouses; w_id++)
        {
            d_id++
                for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE;
                {
                    CustomerBufLoad(d_id, w_id);
                    // Start parallel loading threads here...
                    // Start customer table thread
                    printf("...Loading customer table for:
d_id = %d, w_id = %d\n", d_id, w_id);
                    hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE)
LoadCustomerTable,
&customer_time_start,
0,
&dwThreadId[0]);
                    if (hThread[0] == NULL)
                    {
                        printf("Error, failed in
creating creating thread = 0.\n");
                        exit(-1);
                    }
                    // Start history table thread
                    printf("...Loading history table for:
d_id = %d, w_id = %d\n", d_id, w_id);
                    hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE)
LoadHistoryTable,
&history_time_start,
0,
&dwThreadId[1]);
                    if (hThread[1] == NULL)
                    {
                        printf("Error, failed in
creating creating thread = 1.\n");
                        exit(-1);
                    }
                    WaitForSingleObject( hThread[0],
INFINITE );
                    WaitForSingleObject( hThread[1],
INFINITE );
                    if (CloseHandle(hThread[0]) == FALSE)
                    {
                        printf("Error, failed in
closing customer thread handle with errno: %d\n", GetLastError());
                    }
                    if (CloseHandle(hThread[1]) == FALSE)
                    {
                        printf("Error, failed in
closing history thread handle with errno: %d\n", GetLastError());
                    }
                }
            }
        }
        // flush the bulk connection
        rcint = bcp_done(c_hdbc1);
        if (rcint < 0)
            HandleErrorDBC(c_hdbc1);
        rcint = bcp_done(c_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(c_hdbc2);
        printf("Finished loading customer table.\n");
        // if build index after load...

```

```

if ((aptr->build_index == 1) && (aptr->index_order == 0))
{
    buildIndex("idxcuscl");
    // check the number of processors on this system
    // if 8 or more processors, then build index on
    // if less than 8 processors, do not build the index
    num_procs = atoi(getenv("NUMBER_OF_PROCESSORS"));
    if (num_procs >= 8)
        buildIndex("idxhsc1");
}

// build non-clustered index
if (aptr->build_index == 1)
    buildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID = 1,
// C_W_ID = 1, and C_D_ID = 1
//sprintf(cmd, "osql -S%u -U%u -P%u -d%u -e -Q'update customer
set c_first = 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1'" >
logs\\nurand_load.log",
    sprintf(cmd, "osql -S%u -U%u -P%u -d%u -e -Q'update customer set
c_first = 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1'" >
%snurand_load.log",
    aptr->server,
    aptr->user,
    aptr->password,
    aptr->database,
    LOADER_NURAND_C,
    aptr->log_path);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
// Function : CustomerBufInit
//=====

void CustomerBufInit()
{
    int i;
    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount = (float) 0;

        // fix to avoid ODBC float to numeric conversion
        // customer_buf[i].c_balance = 0;
        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment = 0;
        customer_buf[i].c_payment_cnt = 0;
        customer_buf[i].c_delivery_cnt = 0;

        strcpy(customer_buf[i].c_data,"");

        customer_buf[i].h_amount = 0;
        strcpy(customer_buf[i].h_data,"");
    }

}

//=====
// Function : CustomerBufLoad
// Fills shared buffer for HISTORY and CUSTOMER
//=====

void CustomerBufLoad(int d_id, int w_id)
{
    long CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];
    int i;

```

```

for (i=0;i<customers_per_district;i++)
{
    if (i < 1000)
        LastName(i, c[i].c_last);
    else
        LastName(NURAND(255,0,999,LOADER_NURAND_C), c[i].c_last);
        MakeAlphaString(8,16,FIRST_NAME_LEN, c[i].c_first);
        c[i].c_id = i+1;
}

printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
    d_id, w_id);

for (i=0;i<customers_per_district;i++)
{
    customer_buf[i].c_d_id = d_id;
    customer_buf[i].c_w_id = w_id;
    customer_buf[i].h_amount = 10.0;

    customer_buf[i].c_ytd_payment = 10.0;
    customer_buf[i].c_payment_cnt = 1;
    customer_buf[i].c_delivery_cnt = 0;

    // Generate CUSTOMER and HISTORY data
    customer_buf[i].c_id = c[i].c_id;
    strcpy(customer_buf[i].c_first, c[i].c_first);
    strcpy(customer_buf[i].c_last, c[i].c_last);

    customer_buf[i].c_middle[0] = '0';
    customer_buf[i].c_middle[1] = 'e';
    MakeAddress(customer_buf[i].c_street_1,
customer_buf[i].c_street_2,
customer_buf[i].c_city,
customer_buf[i].c_state,
customer_buf[i].c_zip);
    customer_buf[i].c_phone);
    MakeNumberString(16, 16, PHONE_LEN,
customer_buf[i].c_phone);
    if (RandomNumber(1L, 100L) > 10)
        customer_buf[i].c_credit[0] = 'G';
    else
        customer_buf[i].c_credit[0] = 'B';
        customer_buf[i].c_credit[1] = 'C';
        customer_buf[i].c_credit_lim = 50000.0;
        customer_buf[i].c_discount = ((float) RandomNumber(0L,
5000L)) / 10000.0;

        // fix to avoid ODBC float to numeric conversion
        // customer_buf[i].c_balance = -10.0;
        strcpy(customer_buf[i].c_balance,"-10.0");
        MakeAlphaString(300, 500, C_DATA_LEN,
customer_buf[i].c_data);
        // Generate HISTORY data
        MakeAlphaString(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
}

}

//=====
// Function : LoadCustomerTable
//=====

void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    int i;
    long c_id;
    short c_d_id;
    long c_w_id;
    char c_first[FIRST_NAME_LEN+1];
    char c_middle[MIDDLE_NAME_LEN+1];
    char c_last[LAST_NAME_LEN+1];
    char c_street_1[ADDRESS_LEN+1];
    char c_street_2[ADDRESS_LEN+1];
    char c_city[ADDRESS_LEN+1];
    char c_state[STATE_LEN+1];
    char c_zip[ZIP_LEN+1];
    char c_phone[PHONE_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_credit_lim;
    double c_discount;

    // fix to avoid ODBC float to numeric conversion problem.
    // double c_balance;
    char c_balance[6];

    double c_ytd_payment;
    short c_payment_cnt;
    short c_delivery_cnt;
    char c_data[C_DATA_LEN+1];
    char c_since[C_SINCE_LEN+1];
    RETCODE rc;

```

```

rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 4);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 6);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 7);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 8);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 9);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 10);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 11);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 12);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, 13);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 14);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 15);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 16);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    // fix to avoid ODBC float to numeric conversion problem.
    // rc = bcp_bind(c_hdbc1, (BYTE *) &c_balance, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 17);
    // if (rc != SUCCEEDED)
    //     HandleErrorDBC(c_hdbc1);
    rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, 17);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 18);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 19);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 20);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500, NULL, 0, 0, 21);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        strcpy(c_first, customer_buf[i].c_first);
        strcpy(c_middle, customer_buf[i].c_middle);
        strcpy(c_last, customer_buf[i].c_last);
        strcpy(c_street_1, customer_buf[i].c_street_1);
    }

```

```

strcpy(c_street_2, customer_buf[i].c_street_2);
strcpy(c_city, customer_buf[i].c_city);
strcpy(c_state, customer_buf[i].c_state);
strcpy(c_zip, customer_buf[i].c_zip);
strcpy(c_phone, customer_buf[i].c_phone);
strcpy(c_credit, customer_buf[i].c_credit);
FormatDate(&c_since);

c_credit_lim = customer_buf[i].c_credit_lim;
c_discount = customer_buf[i].c_discount;

problem.
// fix to avoid ODBC float to numeric conversion
// c_balance = customer_buf[i].c_balance;
strcpy(c_balance, customer_buf[i].c_balance);

c_ytd_payment = customer_buf[i].c_ytd_payment;
c_payment_cnt = customer_buf[i].c_payment_cnt;
c_delivery_cnt = customer_buf[i].c_delivery_cnt;

strcpy(c_data, customer_buf[i].c_data);

// Send data to server
rc = bcp_sendrow(c_hdbc1);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

customer_rows_loaded++;
CheckForCommit(c_hdbc1, c_hstmt1,
customer_rows_loaded, "customer", &customer_time_start->time_start);
}

}

//=====
// Function : LoadHistoryTable
//=====
void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    long int i;
    short c_id;
    long c_d_id;
    long c_w_id;
    double h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 4);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, 6);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, 7);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 8);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);
        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
    }
}

```

```

}

//=====
// Function : LoadOrders
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT orders_time_start;
    LOADER_TIME_STRUCT new_order_time_start;
    LOADER_TIME_STRUCT order_line_time_start;
    long d_id;
    short dwThreadId[MAX_ORDER_THREADS];
    HANDLE hThread[MAX_ORDER_THREADS];
    char name[20];
    RETCODE rc;
    char bcphint[128];
    char err_log_path_ord[256];
    char err_log_path_nord[256];
    char err_log_path_ord1[256];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // initialize bulk copy
    sprintf(name, "%s.%s", apr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    strcpy(err_log_path_ord, apr->log_path);
    strcat(err_log_path_ord, "orders.err");
    rc = bcp_init(o_hdbc1, name, NULL, err_log_path_ord, DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (o_w_id, o_d_id,
o_id), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(o_hdbc1);
    }

    sprintf(name, "%s.%s", apr->database, "new_order");

    rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
    strcpy(err_log_path_nord, apr->log_path);
    strcat(err_log_path_nord, "neword.err");
    rc = bcp_init(o_hdbc2, name, NULL, err_log_path_nord, DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc2);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (no_w_id, no_d_id,
no_o_id), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
        rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(o_hdbc2);
    }

    sprintf(name, "%s.%s", apr->database, "order_line");

    rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
    strcpy(err_log_path_ord1, apr->log_path);
    strcat(err_log_path_ord1, "ordline.err");
    rc = bcp_init(o_hdbc3, name, NULL, err_log_path_ord1, DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc3);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (o1_w_id, o1_d_id,
o1_o_id, o1_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(o_hdbc3);
    }

    orders_rows_loaded = 0;
    new_order_rows_loaded = 0;
    order_line_rows_loaded = 0;

    OrdersBufInit();

    orders_time_start.time_start = (TimeNow() / MILLI);
    new_order_time_start.time_start = (TimeNow() / MILLI);
    order_line_time_start.time_start = (TimeNow() / MILLI);

    for (w_id = apr->starting_warehouse; w_id <= apr->
num_warehouses; w_id++)
    {
        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE;
d_id++)
        {
            ordersBufLoad(d_id, w_id);
        }
    }
}

```

```

// start parallel loading threads here...
// start orders table thread
printf("...Loading Order Table for: d_id

= %d, w_id = %d\n", d_id, w_id);

hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE)
LoadOrdersTable,
&orders_time_start,
0,
&dwThreadId[0]);
if (hThread[0] == NULL)
{
    printf("Error, failed in
creating creating thread = 0.\n");
    exit(-1);
}

// start NewOrder table thread
printf("...Loading New-Order Table for:
d_id = %d, w_id = %d\n", d_id, w_id);

hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE)
LoadNewOrderTable,
&new_order_time_start,
0,
&dwThreadId[1]);
if (hThread[1] == NULL)
{
    printf("Error, failed in
creating creating thread = 1.\n");
    exit(-1);
}

// start Order-Line table thread
printf("...Loading Order-Line Table for:
d_id = %d, w_id = %d\n", d_id, w_id);

hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE)
LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadId[2]);
if (hThread[2] == NULL)
{
    printf("Error, failed in
creating creating thread = 2.\n");
    exit(-1);
}

waitForSingleObject( hThread[0],
INFINITE );
waitForSingleObject( hThread[1],
INFINITE );
waitForSingleObject( hThread[2],
INFINITE );

if (CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in
closing Orders thread handle with errno: %d\n", GetLastError());
}
if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in
closing NewOrder thread handle with errno: %d\n", GetLastError());
}
if (CloseHandle(hThread[2]) == FALSE)
{
    printf("Error, failed in
closing OrderLine thread handle with errno: %d\n", GetLastError());
}

printf("Finished loading orders.\n");

return;
}

```

```

=====
Function : OrdersBufInit
Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
=====
void OrdersBufInit()
{
    int i;
    int j;
    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o_ol_cnt = 0;
        orders_buf[i].o_all_local = 0;
        for (j=0;j<=14;j++)
        {
            orders_buf[i].o_ol[j].ol = 0;
            orders_buf[i].o_ol[j].ol_i_id = 0;
            orders_buf[i].o_ol[j].ol_supply_w_id = 0;
            orders_buf[i].o_ol[j].ol_quantity = 0;
            orders_buf[i].o_ol[j].ol_amount = 0;
        }
        strcpy(orders_buf[i].o_ol[0].ol_dist_info,"");
    }
}

=====
Function : OrdersBufLoad
Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
=====
void OrdersBufLoad(int d_id, int w_id)
{
    int cust[ORDERS_PER_DISTRICT+1];
    long o_id;
    short ol;
    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);
    GetPermutation(cust, orders_per_district);
    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data
        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
        orders_buf[o_id].o_c_id = cust[o_id+1];
        orders_buf[o_id].o_ol_cnt = (short)RandomNumber(5L,
        15L);
        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_carrier_id =
            (short)RandomNumber(1L, 10L);
            orders_buf[o_id].o_all_local = 1;
        }
        else
        {
            orders_buf[o_id].o_carrier_id = 0;
            orders_buf[o_id].o_all_local = 1;
        }
        for (ol=0; ol<orders_buf[o_id].o_ol_cnt; ol++)
        {
            orders_buf[o_id].o_ol[ol].ol = ol+1;
            orders_buf[o_id].o_ol[ol].ol_i_id =
            RandomNumber(1L, max_items);
            orders_buf[o_id].o_ol[ol].ol_supply_w_id
            = w_id;
            orders_buf[o_id].o_ol[ol].ol_quantity =
            5;
            MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
            &orders_buf[o_id].o_ol[ol].ol_dist_info);
            // Generate ORDER-LINE data
            if (o_id < first_new_order)
            {
                orders_buf[o_id].o_ol[ol].ol_amount = 0;
                // Added to insure
                ol_delivery_d set properly during load
                FormatDate(&orders_buf[o_id].o_ol[ol].ol_delivery_d);
            }
            else

```

```

        {
            orders_buf[o_id].o_ol[ol].ol_amount =
            RandomNumber(1,999999)/100.0;
            ol_delivery_d set properly during load
            // Added to insure
            // odbc datetime format
            strcpy(orders_buf[o_id].o_ol[ol].ol_delivery_d,"1899-12-31
            00:00:00.000");
        }
    }
}

=====
Function : LoadOrderTable
=====
void LoadOrderTable(LOADER_TIME_STRUCT *orders_time_start)
{
    long int o_id; i;
    short o_d_id;
    long o_w_id;
    long o_c_id;
    short o_carrier_id;
    short o_ol_cnt;
    short o_all_local;
    char o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc; rcint;
    DBINT

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
    1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT2, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT4, 3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT4, 4);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL,
    0, SQLCHARACTER, 5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT2, 6);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT2, 7);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT2, 8);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    for (i = 0; i < orders_per_district; i++)
    {
        o_id = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;
        o_c_id = orders_buf[i].o_c_id;
        o_carrier_id = orders_buf[i].o_carrier_id;
        o_ol_cnt = orders_buf[i].o_ol_cnt;
        o_all_local = orders_buf[i].o_all_local;
        FormatDate(&o_entry_d);
        // send data to server
        rc = bcp_sendrow(o_hdbc1);
        if (rc != SUCCEEDED)
            HandleErrorDBC(o_hdbc1);
        orders_rows_loaded++;
        CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded,
        "orders", &orders_time_start->time_start);
        // rcint = bcp_batch(o_hdbc1);
        // if (rcint < 0)
        //     HandleErrorDBC(o_hdbc1);
        if ((o_w_id == aprtr->num_warehouses) && (o_d_id == 10))
        {
            rcint = bcp_done(o_hdbc1);
            if (rcint < 0)
                HandleErrorDBC(o_hdbc1);
        }
    }
}

```

```

        SQLFreeStmt(o_hstmt1, SQL_DROP);
        SQLDisconnect(o_hdbc1);
        SQLFreeConnect(o_hdbc1);
    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order ==
    BuildIndex("idxordc1"));
    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxordnc");
    }
}

=====
Function : LoadNewOrderTable
=====
void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    int i;
    long o_id;
    short o_d_id;
    long o_w_id;
    RETCODE rc;
    DBINT rcint;
    // Bind NEW-ORDER data
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
    1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT2, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
    SQLINT4, 3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc2);
    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;
        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEEDED)
            HandleErrorDBC(o_hdbc2);
        new_order_rows_loaded++;
        CheckForCommit(o_hdbc2, o_hstmt2,
        new_order_rows_loaded, "new_order", &new_order_time_start->time_start);
        // rcint = bcp_batch(o_hdbc2);
        // if (rcint < 0)
        //     HandleErrorDBC(o_hdbc2);
        if ((o_w_id == aprtr->num_warehouses) && (o_d_id == 10))
        {
            rcint = bcp_done(o_hdbc2);
            if (rcint < 0)
                HandleErrorDBC(o_hdbc2);
            SQLFreeStmt(o_hstmt2, SQL_DROP);
            SQLDisconnect(o_hdbc2);
            SQLFreeConnect(o_hdbc2);
            // if build index after load...
            if ((aptr->build_index == 1) && (aptr->index_order ==
            BuildIndex("idxnodc1"));
        }
    }
}

=====
Function : LoadOrderLineTable
=====
void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    long int o_id; i; j;
    short o_d_id;
    long o_w_id;
    long ol;
    long o_l_i_id;
    long ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    char ol_dist_info[DIST_INFO_LEN+1];
    char ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE rc;
    DBINT rcint;
    // bind ORDER-LINE data

```

```

1);
rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARCHAR, NULL, 0, SQLINT4,
1);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARCHAR, NULL, 0,
SQLINT2, 2);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARCHAR, NULL, 0,
SQLINT4, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_l, 0, SQL_VARCHAR, NULL, 0, SQLINT4,
4);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_l_i_id, 0, SQL_VARCHAR, NULL, 0,
SQLINT4, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_l_supply_w_id, 0, SQL_VARCHAR, NULL, 0,
SQLINT4, 6);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_l_delivery_d, 0,
OL_DELIVERY_D_LEN, NULL, 0, SQL_CHARACTER, 7);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_l_quantity, 0, SQL_VARCHAR, NULL, 0,
SQLINT2, 8);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) &o_l_amount, 0, SQL_VARCHAR, NULL, 0,
SQLFLT8, 9);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = bcp_bind(o_hdbc3, (BYTE *) o_l_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0,
10);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

for (i = 0; i < orders_per_district; i++)
{
    o_id = orders_buf[i].o_id;
    o_d_id = orders_buf[i].o_d_id;
    o_w_id = orders_buf[i].o_w_id;
    for (j=0; j < orders_buf[i].o_l_cnt; j++)
    {
        orders_buf[i].o_l[j].o_l =
        orders_buf[i].o_l[j].o_l_i_id =
        orders_buf[i].o_l[j].o_l_supply_w_id =
        orders_buf[i].o_l[j].o_l_quantity =
        orders_buf[i].o_l[j].o_l_amount =
        strcpy(o_l_delivery_d, orders_buf[i].o_l[j].o_l_delivery_d);

        strcpy(o_l_dist_info, orders_buf[i].o_l[j].o_l_dist_info);

        rc = bcp_sendrow(o_hdbc3);
        if (rc != SUCCEEDED)
            HandleErrorDBC(o_hdbc3);

        order_line_rows_loaded++;
        CheckForCommit(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
    }
}

// rcint = bcp_batch(o_hdbc3);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc3);

if ((o_w_id == apr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc3);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc3);

    SQLFreeStmt(o_hstmt3, SQL_DROP);
    SQLDisconnect(o_hdbc3);
    SQLFreeConnect(o_hdbc3);

    // if build index after load...
    if ((apr->build_index == 1) && (apr->index_order ==
        BuildIndex("idxod1c1"));
}

}

}

//=====

```

```

// Function : GetPermutation
//=====
void GetPermutation(int perm[], int n)
{
    int i, r, t;
    for (i=1; i<=n; i++)
        perm[i] = i;
    for (i=1; i<=n; i++)
    {
        r = RandomNumber(i, n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

// Function : CheckForCommit
//=====
void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    int rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long time_end, time_diff;
    // DBINT rcint;

    if (! (rows_loaded % apr->batch))
    {
        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total
= %d (%.2f rps)\n",
apr->batch,
table_name,
time_diff,
rows_loaded,
(float) apr->batch /
(time_diff ? time_diff : 1L));
    }
    *time_start = time_end;
}
return;

// Function : OpenConnections
//=====
void OpenConnections()
{
    RETCODE rc;
    char szDriverString[300];
    char szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void *)SQL_OV_ODBC3,
0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc3);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc4);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc5);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc6);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc7);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc8);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc9);
    SQLAllocHandle(SQL_HANDLE_DBC, henv, &hdbc10);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connections to SQL Server
}

```

```

// Connection 1
    sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
apr->server,
apr->user,
apr->password,
apr->database );

rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, apr-
>pack_size);
if (rc != SUCCEEDED)
    HandleErrorDBC(i_hdbc1);

rc = SQLDriverConnect ( i_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0],
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEEDED)
    HandleErrorDBC(i_hdbc1);

// Connection 2
    sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
apr->server,
apr->user,
apr->password,
apr->database );

rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, apr-
>pack_size);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = SQLDriverConnect ( w_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0],
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

// Connection 3
    sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
apr->server,
apr->user,
apr->password,
apr->database );

rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, apr-
>pack_size);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

rc = SQLDriverConnect ( c_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0],
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

// Connection 4
    sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",

```

```

aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc2);

// Connection 5
sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc1);

// Connection 6
sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc2);

// Connection 7
sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
aptr->server,
aptr->user,

```

```

aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEEDED)
    HandleErrorDBC(o_hdbc3);

}

// =====
// Function name: BuildIndex
// =====

void BuildIndex(char *index_script)
{
    char cmd[256];

    printf("Starting index creation: %s\n",index_script);
    sprintf(cmd, "osql -S%s -U%s -P%s -e -i%s\\%s.sql > %s%s.log",
aptr->server,
aptr->user,
aptr->password,
aptr->index_script_path,
index_script,
aptr->log_path,
index_script);

    system(cmd);

    printf("Finished index creation: %s\n",index_script);
}

void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR szSqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
SQLINTEGER NativeError;
SQLSMALLINT i, MsgLen;
SQLRETURN rc2;
char timebuf[128];
char datebuf[128];
char err_log_path[256];
FILE *fp1;

i = 1;
while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SzSqlState ,
&NativeError,
&MsgLen )) != SQL_NO_DATA )
    {
        sprintf( szLastError, "%s", Msg );
        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n", datebuf, timebuf,
szLastError);

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"w");
        //fp1 = fopen("Togs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog
file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\n", datebuf,
timebuf, szLastError);
            fclose(fp1);
        }
        i++;
    }
}

void HandleErrorSTMT (HSTMT hstmt1)
{
    SQLCHAR szSqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
SQLINTEGER NativeError;
SQLSMALLINT i, MsgLen;
SQLRETURN rc2;
char timebuf[128];

```

```

char datebuf[128];
char err_log_path[256];
FILE *fp1;

i = 1;
while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i,
SqlState , &NativeError,
&MsgLen )) != SQL_NO_DATA )
    {
        sprintf( szLastError, "%s", Msg );
        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n", datebuf, timebuf,
szLastError);

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"w");
        //fp1 = fopen("Togs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog
file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\n", datebuf,
timebuf, szLastError);
            fclose(fp1);
        }
        i++;
    }
}

void FormatDate ( char* szTimeOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = localtime( &now );
    mktime( &when );

    // odbc datetime format
    strftime( szTimeOutput , 30 , "%Y-%m-%d %H:%M:%S.000", &when );
    return;
}

// =====
// Function : CheckDataBase
// =====

void CheckDataBase()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    char TablesBitMap[9] =
{"000000000"};
    int i, ExitFlag;

    SQLSMALLINT cbDriverStringOut;
    SQLCHAR TabName[10];
    SQLINTEGER TabNameInd, TabCount, TabCountInd;

    ExitFlag = 0;
    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3,
0 );
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &v_hdbc);
    SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connection to SQL Server
    sprintf( szDriverString, "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
aptr->server,
aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectAttr( v_hdbc, SQL_ATTR_PACKET_SIZE,
(SQLPOINTER)aptr->pack_size, SQL_IS_INTEGER );
    if (rc != SQL_SUCCESS)
        HandleErrorDBC(v_hdbc);

    rc = SQLDriverConnect ( v_hdbc,
NULL,

```

```

(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
// if the rc is SQL_ERROR, the the TPCC database probably does not
exist
if (rc == SQL_ERROR)
{
    printf("The database TPCC does not appear to
    exist!\n");
    printf("\nCheck LOGS\\ directory for database
    creation errors.\n");
    // cleanup database connections and handles
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);
    // since there is not a database, exit back to
    SETUP.CMD
    exit(1);
}
if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt) !=
SQL_SUCCESS )
    HandleErrorDBC(v_hdbc);
if ( SQLBindCol(v_hstmt, 1, SQL_C_ULONG, &TabCount, 0,
&TabCountInd) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);
// count the number of user tables from sysobjects
rc = SQLExecDirect(v_hstmt, "select count(*) from sysobjects where
xtype = '\u0020', SQL_NTS);
if ((rc != SQL_SUCCESS) && (rc != SQL_SUCCESS_WITH_INFO))
    HandleErrorSTMT(v_hstmt);
if ( SQLFetch(v_hstmt) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);
// if the number of tables is less than 9, select all the user
tables in TPCC
if (TabCount != 9)
{
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc , &v_hstmt);
    if ( SQLBindCol(v_hstmt, 1, SQL_C_CHAR, &TabName,
sizeof(TabName), &TabNameInd) != SQL_SUCCESS )
        HandleErrorSTMT(v_hstmt);
    // select the list of user tables into a result set
    rc = SQLExecDirect(v_hstmt, "select * from sysobjects
where xtype = '\u0020', SQL_NTS);
    if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
        HandleErrorSTMT(v_hstmt);
    // go through the result set and set the bitmap for
    each found table
    // set the bitmap to '1' if the table name is found
    while ((rc = SQLFetch(v_hstmt)) != SQL_NO_DATA)
    {
        switch( TabName[0] )
        {
            case 'w': TablesBitMap[0] = '1';
                    break;
            case 'd': TablesBitMap[1] = '1';
                    break;
            case 'c': TablesBitMap[2] = '1';
                    break;
            case 'h': TablesBitMap[3] = '1';
                    break;
            case 'n': TablesBitMap[4] = '1';
                    break;
            case 'o': if (TabName[5] = 's')
                    TablesBitMap[5] = '1';
                    if (TabName[5] = 'r')
                    TablesBitMap[6] = '1';
                    break;
            case 'i': TablesBitMap[7] = '1';
                    break;
            case 's': TablesBitMap[8] = '1';
                    break;
        }
    }
    // a '0' ExitFlag means do NOT exit the loader early,
    a '1' means exit the loader early
    ExitFlag = 0;
    // iterate through the bitmap to display which

```

```

table(s) is actually missing
for (i = 0; i <= 8; i++)
{
    switch(i)
    {
        case 0: if (TablesBitMap[i] ==
                '0')
                {
                    printf("The
                    warehouse table is missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
        case 1: if (TablesBitMap[i] ==
                '0')
                {
                    printf("The
                    District table is missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
        case 2: if (TablesBitMap[i] ==
                '0')
                {
                    printf("The
                    Customer table is missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
        case 3: if (TablesBitMap[i] ==
                '0')
                {
                    printf("The
                    History table is missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
        case 4: if (TablesBitMap[i] ==
                '0')
                {
                    printf("The
                    New_Order table is missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
        case 5: if (TablesBitMap[i] ==
                '0')
                {
                    printf("The
                    orders table is missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
        case 6: if (TablesBitMap[i] ==
                '0')
                {
                    printf("The
                    Order_Line table is missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
        case 7: if (TablesBitMap[i] ==
                '0')
                {
                    printf("The
                    Item table is missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
        case 8: if (TablesBitMap[i] ==
                '0')
                {
                    printf("The
                    Stock table is missing or damaged.\n");
                    ExitFlag = 1;
                }
                break;
    }
}
// if one or more tables are missing, display message
and exit the loader
if (ExitFlag = 1)
{
    printf("\nExiting TPC-C Loader!\n");
    printf("\nCheck LOGS\\ directory for
    database\n");
    printf("or table creation errors.\n");
    // cleanup database connections and
    handles
    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);
    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);
    exit(1);
}
// cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);
}
return;

```

Appendix C : Tunable Parameters

RTE input parameter

The following parameters were used with Microsoft BenchCraft RTE..

Profile: 36000w69d23cl69segVIA_3tier442
File Path: C:\BenchCraft\36000w69d23cl69segVIA_3tier442.pro
Version: 3

Number of Engines: 69

Name: DRIVER01
Description:
Directory: \drv27
Machine: rte27
Parameter Set: TPCC
Index: 0
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER15613328
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER02
Description:
Directory: \drv28
Machine: rte28
Parameter Set: TPCC
Index: 10000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER25748171
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER03
Description:
Directory: \drv03
Machine: rte03
Parameter Set: TPCC
Index: 20000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER35788125
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233

CPU: 0

Name: DRIVER04
Description:
Directory: \drv04
Machine: rte04
Parameter Set: TPCC
Index: 30000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER45807890
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER05
Description:
Directory: \drv05
Machine: rte05
Parameter Set: TPCC
Index: 40000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER55830703
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER06
Description:
Directory: \drv06
Machine: rte06
Parameter Set: TPCC
Index: 50000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER65843265
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER07
Description:
Directory: \drv07
Machine: rte07
Parameter Set: TPCC
Index: 60000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER75856421
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1

Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER08
Description:
Directory: \drv08
Machine: rte08
Parameter Set: TPCC
Index: 70000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER85872031
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER09
Description:
Directory: \drv09
Machine: rte09
Parameter Set: TPCC
Index: 80000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER95885734
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER10
Description:
Directory: \drv10
Machine: rte10
Parameter Set: TPCC
Index: 90000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER105900859
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER11
Description:
Directory: \drv11
Machine: rte11
Parameter Set: TPCC
Index: 100000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER115917906
Connect Rate: 1000

Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER12
 Description:
 Directory: \drv12
 Machine: rte12
 Parameter Set: TPCC
 Index: 110000000
 Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER125975890
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER13
 Description:
 Directory: \drv13
 Machine: rte13
 Parameter Set: TPCC
 Index: 120000000
 Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER135988968
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER14
 Description:
 Directory: \drv14
 Machine: rte14
 Parameter Set: TPCC
 Index: 130000000
 Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER14599875
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER15
 Description:
 Directory: \drv15
 Machine: rte15
 Parameter Set: TPCC
 Index: 140000000
 Seed: 1423
 Configured Users: 5220

Pipe Name: DRIVER156012468
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER16
 Description:
 Directory: \drv16
 Machine: rte16
 Parameter Set: TPCC
 Index: 150000000
 Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER166034515
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER17
 Description:
 Directory: \drv17
 Machine: rte17
 Parameter Set: TPCC
 Index: 160000000
 Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER176056890
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER18
 Description:
 Directory: \drv18
 Machine: rte18
 Parameter Set: TPCC
 Index: 170000000
 Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER186067421
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER19
 Description:
 Directory: \drv19
 Machine: rte19
 Parameter Set: TPCC
 Index: 180000000

Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER196077875
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER20
 Description:
 Directory: \drv20
 Machine: rte20
 Parameter Set: TPCC
 Index: 190000000
 Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER206089687
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER21
 Description:
 Directory: \drv21
 Machine: rte21
 Parameter Set: TPCC
 Index: 200000000
 Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER216105171
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER22
 Description:
 Directory: \drv22
 Machine: rte22
 Parameter Set: TPCC
 Index: 210000000
 Seed: 1423
 Configured Users: 5220
 Pipe Name: DRIVER226121546
 Connect Rate: 1000
 Start Rate: 0
 Max. Concurrency: -1
 Concurrency Rate: 10
 CLIENT_NURAND: 233
 CPU: 0

Name: DRIVER23
 Description:
 Directory: \drv23
 Machine: rte23

Parameter Set: TPCC
Index: 220000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER236221312
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER24
Description:
Directory: \drv272
Machine: rte27
Parameter Set: TPCC
Index: 230000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER24946781
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER25
Description:
Directory: \drv282
Machine: rte28
Parameter Set: TPCC
Index: 240000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER251024640
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER26
Description:
Directory: \drv032
Machine: rte03
Parameter Set: TPCC
Index: 250000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER261066781
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER27
Description:

Directory: \drv042
Machine: rte04
Parameter Set: TPCC
Index: 260000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER271128296
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER28
Description:
Directory: \drv052
Machine: rte05
Parameter Set: TPCC
Index: 270000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER281180234
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER29
Description:
Directory: \drv062
Machine: rte06
Parameter Set: TPCC
Index: 280000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER291209718
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER30
Description:
Directory: \drv072
Machine: rte07
Parameter Set: TPCC
Index: 290000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER301242343
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER31
Description:
Directory: \drv082
Machine: rte08
Parameter Set: TPCC
Index: 300000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER311320234
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER32
Description:
Directory: \drv092
Machine: rte09
Parameter Set: TPCC
Index: 310000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER321368968
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER33
Description:
Directory: \drv102
Machine: rte10
Parameter Set: TPCC
Index: 320000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER331410390
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER34
Description:
Directory: \drv112
Machine: rte11
Parameter Set: TPCC
Index: 330000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER341437859
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233

CPU: 1
Name: DRIVER35
Description:
Directory: \drv122
Machine: rte12
Parameter Set: TPCC
Index: 340000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER351467500
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER36
Description:
Directory: \drv132
Machine: rte13
Parameter Set: TPCC
Index: 350000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER361496468
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER37
Description:
Directory: \drv142
Machine: rte14
Parameter Set: TPCC
Index: 360000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER371522218
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER38
Description:
Directory: \drv152
Machine: rte15
Parameter Set: TPCC
Index: 370000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER381548062
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1

Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1
Name: DRIVER39
Description:
Directory: \drv162
Machine: rte16
Parameter Set: TPCC
Index: 380000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER391579906
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER40
Description:
Directory: \drv172
Machine: rte17
Parameter Set: TPCC
Index: 390000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER401606109
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER41
Description:
Directory: \drv182
Machine: rte18
Parameter Set: TPCC
Index: 400000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER411631687
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER42
Description:
Directory: \drv192
Machine: rte19
Parameter Set: TPCC
Index: 410000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER421651875
Connect Rate: 1000

Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER43
Description:
Directory: \drv202
Machine: rte20
Parameter Set: TPCC
Index: 420000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER431686984
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER44
Description:
Directory: \drv212
Machine: rte21
Parameter Set: TPCC
Index: 430000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER441708750
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER45
Description:
Directory: \drv222
Machine: rte22
Parameter Set: TPCC
Index: 440000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER451733937
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER46
Description:
Directory: \drv232
Machine: rte23
Parameter Set: TPCC
Index: 450000000
Seed: 1423
Configured Users: 5220

Pipe Name: DRIVER461768046
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 1

Name: DRIVER47
Description:
Directory: \drv273
Machine: rte27
Parameter Set: TPCC
Index: 460000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER4713701375
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER48
Description:
Directory: \drv283
Machine: rte28
Parameter Set: TPCC
Index: 470000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER4813767953
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER49
Description:
Directory: \drv033
Machine: rte03
Parameter Set: TPCC
Index: 480000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER4913797062
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER50
Description:
Directory: \drv043
Machine: rte04
Parameter Set: TPCC
Index: 490000000

Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER5013818890
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER51
Description:
Directory: \drv053
Machine: rte05
Parameter Set: TPCC
Index: 500000000
Seed: 1423
Configured Users: 5220
Pipe Name: DRIVER5113843562
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER52
Description:
Directory: \drv063
Machine: rte06
Parameter Set: TPCC
Index: 510000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER5213863718
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER53
Description:
Directory: \drv073
Machine: rte07
Parameter Set: TPCC
Index: 520000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER5313890265
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER54
Description:
Directory: \drv083
Machine: rte08

Parameter Set: TPCC
Index: 530000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER5413908312
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER55
Description:
Directory: \drv093
Machine: rte09
Parameter Set: TPCC
Index: 540000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER5513924546
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER56
Description:
Directory: \drv103
Machine: rte10
Parameter Set: TPCC
Index: 550000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER5613943203
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER57
Description:
Directory: \drv113
Machine: rte11
Parameter Set: TPCC
Index: 560000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER5713963031
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER58
Description:

Directory: \drv123
Machine: rte12
Parameter Set: TPCC
Index: 570000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER5813981406
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER59
Description:
Directory: \drv133
Machine: rte13
Parameter Set: TPCC
Index: 580000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER5913994921
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER60
Description:
Directory: \drv143
Machine: rte14
Parameter Set: TPCC
Index: 590000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6014010234
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER61
Description:
Directory: \drv153
Machine: rte15
Parameter Set: TPCC
Index: 600000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6114029109
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER62
Description:
Directory: \drv163
Machine: rte16
Parameter Set: TPCC
Index: 610000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6214050156
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER63
Description:
Directory: \drv173
Machine: rte17
Parameter Set: TPCC
Index: 620000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6314065546
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER64
Description:
Directory: \drv183
Machine: rte18
Parameter Set: TPCC
Index: 630000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6414081718
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER65
Description:
Directory: \drv193
Machine: rte19
Parameter Set: TPCC
Index: 640000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6514096437
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233

CPU: 0
Name: DRIVER66
Description:
Directory: \drv203
Machine: rte20
Parameter Set: TPCC
Index: 650000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6614110046
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER67
Description:
Directory: \drv213
Machine: rte21
Parameter Set: TPCC
Index: 660000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6714125062
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER68
Description:
Directory: \drv223
Machine: rte22
Parameter Set: TPCC
Index: 670000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6814148140
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1
Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Name: DRIVER69
Description:
Directory: \drv233
Machine: rte23
Parameter Set: TPCC
Index: 680000000
Seed: 1423
Configured Users: 5210
Pipe Name: DRIVER6914161640
Connect Rate: 1000
Start Rate: 0
Max. Concurrency: -1

Concurrency Rate: 10
CLIENT_NURAND: 233
CPU: 0

Number of User groups: 69

Driver Engine: DRIVER01
IIS Server: acl27
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1 - 522
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER02
IIS Server: acl28
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 523 - 1044
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER03
IIS Server: acl03
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1045 - 1566
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER04
IIS Server: acl04
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1567 - 2088
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER05
IIS Server: acl05
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2089 - 2610
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER06
IIS Server: acl06
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2611 - 3132
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER07
IIS Server: acl07
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3133 - 3654
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER08
IIS Server: acl08
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3655 - 4176
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER09
IIS Server: acl09
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML

w_id Range: 4177 - 4698
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER10
IIS Server: acl10
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 4699 - 5220
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER11
IIS Server: acl11
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 5221 - 5742
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER12
IIS Server: acl12
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 5743 - 6264
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER13
IIS Server: acl13
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 6265 - 6786
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1

Scale Down: No

Driver Engine: DRIVER14
IIS Server: acl14
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 6787 - 7308
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER15
IIS Server: acl15
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 7309 - 7830
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER16
IIS Server: acl16
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 7831 - 8352
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER17
IIS Server: acl17
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 8353 - 8874
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER18
IIS Server: acl18
SQL Server: asama
Database: tpcc

User: sa
Protocol: HTML
w_id Range: 8875 - 9396
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER19
IIS Server: acl19
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 9397 - 9918
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER20
IIS Server: acl20
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 9919 - 10440
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER21
IIS Server: acl21
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 10441 - 10962
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER22
IIS Server: acl22
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 10963 - 11484
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal

User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER23
IIS Server: acl23
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 11485 - 12006
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER24
IIS Server: acl272
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 12007 - 12528
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER25
IIS Server: acl282
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 12529 - 13050
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER26
IIS Server: acl032
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 13051 - 13572
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER27
IIS Server: acl042

SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 13573 - 14094
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER28
IIS Server: acl052
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 14095 - 14616
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER29
IIS Server: acl062
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 14617 - 15138
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER30
IIS Server: acl072
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 15139 - 15660
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER31
IIS Server: acl082
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 15661 - 16182
w_id Min Warehouse: 1

w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER32
IIS Server: acl092
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 16183 - 16704
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER33
IIS Server: acl102
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 16705 - 17226
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER34
IIS Server: acl112
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 17227 - 17748
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER35
IIS Server: acl122
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 17749 - 18270
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER36
IIS Server: acl132
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 18271 - 18792
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER37
IIS Server: acl142
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 18793 - 19314
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER38
IIS Server: acl152
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 19315 - 19836
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER39
IIS Server: acl162
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 19837 - 20358
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER40
IIS Server: acl172
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML

w_id Range: 20359 - 20880
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER41
IIS Server: acl182
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 20881 - 21402
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER42
IIS Server: acl192
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 21403 - 21924
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER43
IIS Server: acl202
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 21925 - 22446
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER44
IIS Server: acl212
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 22447 - 22968
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1

Scale Down: No

Driver Engine: DRIVER45
IIS Server: acl222
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 22969 - 23490
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER46
IIS Server: acl232
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 23491 - 24012
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER47
IIS Server: acl273
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 24013 - 24534
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER48
IIS Server: acl283
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 24535 - 25056
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER49
IIS Server: acl033
SQL Server: asama
Database: tpcc

User: sa
Protocol: HTML
w_id Range: 25057 - 25578
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER50
IIS Server: acl043
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 25579 - 26100
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER51
IIS Server: acl053
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 26101 - 26622
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5220
District id: 1
Scale Down: No

Driver Engine: DRIVER52
IIS Server: acl063
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 26623 - 27143
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal
User Count: 5210
District id: 1
Scale Down: No

Driver Engine: DRIVER53
IIS Server: acl073
SQL Server: asama
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 27144 - 27664
w_id Min Warehouse: 1
w_id Max Warehouse: 36000
Scale: Normal

User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER54
 IIS Server: acl083
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 27665 - 28185
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER55
 IIS Server: acl093
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 28186 - 28706
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER56
 IIS Server: acl103
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 28707 - 29227
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER57
 IIS Server: acl113
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 29228 - 29748
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER58
 IIS Server: acl123

SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 29749 - 30269
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER59
 IIS Server: acl133
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 30270 - 30790
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER60
 IIS Server: acl143
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 30791 - 31311
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER61
 IIS Server: acl153
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 31312 - 31832
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER62
 IIS Server: acl163
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 31833 - 32353
 w_id Min Warehouse: 1

w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER63
 IIS Server: acl173
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 32354 - 32874
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER64
 IIS Server: acl183
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 32875 - 33395
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER65
 IIS Server: acl193
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 33396 - 33916
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER66
 IIS Server: acl203
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 33917 - 34437
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER67
 IIS Server: acl213
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 34438 - 34958
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER68
 IIS Server: acl223
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 34959 - 35479
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Driver Engine: DRIVER69
 IIS Server: acl233
 SQL Server: asama
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 35480 - 36000
 w_id Min Warehouse: 1
 w_id Max Warehouse: 36000
 Scale: Normal
 User Count: 5210
 District id: 1
 Scale Down: No

Number of Parameter Sets: 3

~Default
 Default Parameter Set

Menu		Txn	Think	Key	RT	RT
Fence	Delay	Weight	Time	Time	Delay	
0.10	5.00	New Order	10.00	12.05	18.01	
		0.10				
0.10	5.00	Payment	10.00	12.05	3.01	
		0.10				
0.10	5.00	Delivery	1.00	5.05	2.01	
		0.10				
0.10	20.00	Stock Level	1.00	5.05	2.01	
		0.10				
0.10	5.00	Order Status	1.00	10.05	2.01	
		0.10				

batch

Menu		Txn	Think	Key	RT	RT
Fence	Delay	Weight	Time	Time	Delay	
0.00	0.00	New Order	44.92	0.00	0.00	
		0.00				
0.00	0.00	Payment	43.02	0.00	0.00	
		0.00				
0.00	0.00	Delivery	4.02	0.00	0.00	
		0.00				
0.00	0.00	Stock Level	4.02	0.00	0.00	
		0.00				
0.00	0.00	Order Status	4.02	0.00	0.00	
		0.00				

TPCC

Menu		Txn	Think	Key	RT	RT
Fence	Delay	Weight	Time	Time	Delay	
0.10	5.00	New Order	44.92	12.07	18.01	
		0.10				
0.10	5.00	Payment	43.01	12.07	3.01	
		0.10				
0.10	5.00	Delivery	4.02	5.07	2.01	
		0.10				
0.10	20.00	Stock Level	4.02	5.07	2.01	
		0.10				
0.10	5.00	Order Status	4.03	10.07	2.01	
		0.10				

SMBIOS Version 2.3
 Windows Directory C:\WINDOWS
 System Directory C:\WINDOWS\system32
 Boot Device \Device\HarddiskVolume1
 Locale United States
 Hardware Abstraction Layer Version = "5.2.3718.0 (dnsrv.021114-1947)"
 User Name ASAMA\Administrator
 Time Zone Tokyo Standard Time
 Total Physical Memory 32.12 MB
 Available Physical Memory 507.03 GB
 Total Virtual Memory 1,021.54 GB
 Available Virtual Memory 1,016.07 GB
 Page File Space 509.57 GB
 Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device
 I/O Port 0x00001F00-0x00001FFF PCI bus
 I/O Port 0x00001F00-0x00001FFF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00000000-0x000003AF PCI bus
 I/O Port 0x00000000-0x000003AF Direct memory access controller

 I/O Port 0x00001B00-0x00001BFF PCI bus
 I/O Port 0x00001B00-0x00001BFF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x000003C0-0x000003DF PCI bus
 I/O Port 0x000003C0-0x000003DF Standard VGA Graphics Adapter

 I/O Port 0x00002200-0x000022FF PCI bus
 I/O Port 0x00002200-0x000022FF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00002000-0x000020FF PCI bus
 I/O Port 0x00002000-0x000020FF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00001700-0x000017FF PCI bus
 I/O Port 0x00001700-0x000017FF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00001300-0x000014FF PCI bus
 I/O Port 0x00001300-0x000014FF Adaptec SCSI Card 39160 - Ultra160 SCSI

 I/O Port 0x00001A00-0x00001AFF PCI bus
 I/O Port 0x00001A00-0x00001AFF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00002100-0x000021FF PCI bus
 I/O Port 0x00002100-0x000021FF QLogic QLA23xx PCI Fibre Channel Adapter

I/O Port 0x00001600-0x000016FF PCI bus
 I/O Port 0x00001600-0x000016FF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00001D00-0x00001DFF PCI bus
 I/O Port 0x00001D00-0x00001DFF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00002400-0x000024FF PCI bus
 I/O Port 0x00002400-0x000024FF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00001900-0x000019FF PCI bus
 I/O Port 0x00001900-0x000019FF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00001500-0x000015FF PCI bus
 I/O Port 0x00001500-0x000015FF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00001C00-0x00001CFF PCI bus
 I/O Port 0x00001C00-0x00001CFF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00002300-0x000023FF PCI bus
 I/O Port 0x00002300-0x000023FF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00001800-0x000018FF PCI bus
 I/O Port 0x00001800-0x000018FF QLogic QLA23xx PCI Fibre Channel Adapter

 Memory Address 0xA0000-0xBFFFF PCI bus
 Memory Address 0xA0000-0xBFFFF Standard VGA Graphics Adapter

 I/O Port 0x00001200-0x000012FF PCI bus
 I/O Port 0x00001200-0x000012FF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x000003B0-0x000003BB PCI bus
 I/O Port 0x000003B0-0x000003BB Standard VGA Graphics Adapter

 I/O Port 0x00001E00-0x00001EFF PCI bus
 I/O Port 0x00001E00-0x00001EFF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00002500-0x0000FFFF PCI bus
 I/O Port 0x00002500-0x0000FFFF QLogic QLA23xx PCI Fibre Channel Adapter

 I/O Port 0x00000D00-0x000011FF PCI bus
 I/O Port 0x00000D00-0x000011FF Extended IO Bus

[DMA]

Resource Device Status
 Channel 4 Direct memory access controller OK

[Forced Hardware]

Device	PNP Device ID
[I/O]	
Resource Device Status	
0x00000000-0x000003AF	PCI bus OK
0x00000000-0x000003AF	Direct memory access controller
OK	
0x000003B0-0x000003BB	PCI bus OK
0x000003B0-0x000003BB	Standard VGA Graphics Adapter
OK	
0x000003BC-0x000003BF	PCI bus OK
0x000003C0-0x000003DF	PCI bus OK
0x000003C0-0x000003DF	Standard VGA Graphics Adapter
OK	
0x000003E0-0x00000CF7	PCI bus OK
0x00000D00-0x000011FF	PCI bus OK
0x00000D00-0x000011FF	Extended IO Bus OK
0x00000080-0x0000008F	Direct memory access controller
OK	
0x000000C0-0x000000DF	Direct memory access controller
OK	
0x00000020-0x00000021	Programmable interrupt controller
OK	
0x000000A0-0x000000A1	Programmable interrupt controller
OK	
0x00000040-0x00000043	System timer OK
0x00000061-0x00000061	System speaker OK
0x00000070-0x00000071	System CMOS/real time clock
OK	
0x000000F0-0x000000FF	Numeric data processor
OK	
0x000000B2-0x000000B3	Generic Bus OK
0x00000E00-0x00000E3F	Generic Bus OK
0x00000092-0x00000092	Motherboard resources
OK	
0x000004D0-0x000004D1	Motherboard resources
OK	
0x00000D80-0x00000D80	Motherboard resources
OK	
0x00000D81-0x00000D81	Motherboard resources
OK	
0x00000CA0-0x00000CA1	Motherboard resources
OK	
0x00000CA4-0x00000CA7	Motherboard resources
OK	
0x0000002E-0x0000002F	Motherboard resources
OK	
0x00000060-0x00000060	Standard 101/102-Key or
Microsoft Natural PS/2 Keyboard	OK
0x00000064-0x00000064	Standard 101/102-Key or
Microsoft Natural PS/2 Keyboard	OK
0x000003F8-0x000003FF	Communications Port (COM1)
OK	
0x00000C00-0x00000C03	Extended IO Bus OK
0x00000F00-0x00000F7F	Extended IO Bus OK
0x00000F80-0x00000FFF	Extended IO Bus OK
OK	
0x00000CA2-0x00000CA2	OK
0x00000CA3-0x00000CA3	OK
0x00001120-0x0000112F	Intel(r) IA64 Bus Master IDE
Controller	OK

0x00001F0-0x00001F7 Primary IDE Channel OK
 0x000003F6-0x000003F6 Primary IDE Channel OK
 0x00001100-0x0000111F Intel(r) 82372FB PCI to USB
 Universal Host Controller OK
 0x00001000-0x000010FF Standard VGA Graphics Adapter
 OK
 0x000002F8-0x000002FF Communications Port (COM2)
 OK
 0x00001200-0x000012FF PCI bus OK
 0x00001200-0x000012FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001300-0x000014FF PCI bus OK
 0x00001300-0x000014FF Adaptec SCSI Card 39160 -
 Ultra160 SCSI OK
 0x00001400-0x000014FF Adaptec SCSI Card 39160 -
 Ultra160 SCSI OK
 0x00001500-0x000015FF PCI bus OK
 0x00001500-0x000015FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001600-0x000016FF PCI bus OK
 0x00001600-0x000016FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001700-0x000017FF PCI bus OK
 0x00001700-0x000017FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001800-0x000018FF PCI bus OK
 0x00001800-0x000018FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001900-0x000019FF PCI bus OK
 0x00001900-0x000019FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001A00-0x00001AFF PCI bus OK
 0x00001A00-0x00001AFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001B00-0x00001BFF PCI bus OK
 0x00001B00-0x00001BFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001C00-0x00001CFF PCI bus OK
 0x00001C00-0x00001CFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001D00-0x00001DFF PCI bus OK
 0x00001D00-0x00001DFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001E00-0x00001EFF PCI bus OK
 0x00001E00-0x00001EFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00001F00-0x00001FFF PCI bus OK
 0x00001F00-0x00001FFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00002000-0x000020FF PCI bus OK
 0x00002000-0x000020FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00002100-0x000021FF PCI bus OK
 0x00002100-0x000021FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00002200-0x000022FF PCI bus OK
 0x00002200-0x000022FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00002300-0x000023FF PCI bus OK
 0x00002300-0x000023FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00002400-0x000024FF PCI bus OK

0x00002400-0x000024FF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0x00002500-0x0000FFFF PCI bus OK
 0x00002500-0x0000FFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK

 [IRQs]
 Resource Device Status
 IRQ 9 Microsoft ACPI-Compliant System OK
 IRQ 0 System timer OK
 IRQ 8 System CMOS/real time clock OK
 IRQ 13 Numeric data processor OK
 IRQ 1 Standard 101/102-Key or Microsoft Natural PS/2
 Keyboard OK
 IRQ 12 PS/2 Compatible Mouse OK
 IRQ 4 Communications Port (COM1) OK
 IRQ 11 OK
 IRQ 14 Primary IDE Channel OK
 IRQ 19 Intel(r) 82372FB PCI to USB Universal Host Controller
 OK
 IRQ 245 Communications Port (COM2) OK
 IRQ 64 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 68 Adaptec SCSI Card 39160 - Ultra160 SCSI OK
 IRQ 67 Adaptec SCSI Card 39160 - Ultra160 SCSI OK
 IRQ 69 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 73 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 78 Intel(R) PRO/1000 F Server Adapter OK
 IRQ 84 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 86 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 91 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 95 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 100 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 150 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 152 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 157 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 161 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 166 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 172 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 174 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 179 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 183 QLogic QLA23xx PCI Fibre Channel Adapter OK
 IRQ 188 QLogic QLA23xx PCI Fibre Channel Adapter OK

 [Memory]
 Resource Device Status
 0xA0000-0xBFFFF PCI bus OK
 0xA0000-0xBFFFF Standard VGA Graphics Adapter OK
 0xC0000-0xC3FFF PCI bus OK
 0xC4000-0xC7FFF PCI bus OK
 0xC8000-0xCBFFF PCI bus OK
 0xCC000-0xCFFFF PCI bus OK
 0xD0000-0xD3FFF PCI bus OK
 0xD4000-0xD7FFF PCI bus OK
 0xD8000-0xDBFFF PCI bus OK
 0xDC000-0xDFFFF PCI bus OK
 0xE0000-0xE3FFF PCI bus OK
 0xE4000-0xE7FFF PCI bus OK
 0xE8000-0xEBFFF PCI bus OK
 0xEC000-0xEFFFF PCI bus OK
 0xF0000-0xFFFFF PCI bus OK

0xFBC00000-0xFDFFFFFF PCI bus OK
 0xFC000000-0xFCFFFFFF Standard VGA Graphics Adapter
 OK
 0xFDFFFFFF00-0xFDFFFFFF Standard VGA Graphics Adapter
 OK
 0xFB800000-0xFBFFFFFF PCI bus OK
 0xFB800000-0xFBFFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xFB400000-0xFB7FFFFF PCI bus OK
 0xFB7FF000-0xFB7FFFFF Adaptec SCSI Card 39160 -
 Ultra160 SCSI OK
 0xFB7FE000-0xFB7FEFFF Adaptec SCSI Card 39160 -
 Ultra160 SCSI OK
 0xFB000000-0xFB3FFFFF PCI bus OK
 0xFB3FF000-0xFB3FFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xFAC00000-0xFAFFFFFF PCI bus OK
 0xFAFFF000-0xFAFFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xFA800000-0xFABFFFFF PCI bus OK
 0xFABC0000-0xFABDFFFF Intel(R) PRO/1000 F Server
 Adapter OK
 0xFABF0000-0xFABFFFFF Intel(R) PRO/1000 F Server
 Adapter OK
 0xFA400000-0xFA7FFFFF PCI bus OK
 0xFA7FF000-0xFA7FFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xFA000000-0xFA3FFFFF PCI bus OK
 0xFA3FF000-0xFA3FFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF9C00000-0xF9FFFFFF PCI bus OK
 0xF9FFF000-0xF9FFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF9800000-0xF9BFFFFF PCI bus OK
 0xF9BFF000-0xF9BFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF9400000-0xF97FFFFF PCI bus OK
 0xF97FF000-0xF97FFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF9000000-0xF93FFFFF PCI bus OK
 0xF93FF000-0xF93FFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF8C00000-0xF8FFFFFF PCI bus OK
 0xF8FFF000-0xF8FFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF8800000-0xF8BFFFFF PCI bus OK
 0xF8BFF000-0xF8BFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF8400000-0xF87FFFFF PCI bus OK
 0xF87FF000-0xF87FFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF8000000-0xF83FFFFF PCI bus OK
 0xF83FF000-0xF83FFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF7C00000-0xF7FFFFFF PCI bus OK
 0xF7FFF000-0xF7FFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF7800000-0xF7BFFFFF PCI bus OK
 0xF7BFF000-0xF7BFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xF7400000-0xF77FFFFF PCI bus OK
 0xF77FF000-0xF77FFFFF QLogic QLA23xx PCI Fibre

Channel Adapter OK
 0xF7000000-0xF73FFFFFF PCI bus OK
 0xF73FF000-0xF73FFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xE0000000-0xF6FFFFFF PCI bus OK
 0xF6FFF000-0xF6FFFFFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK

[Components]

[Multimedia]

[Audio Codecs]

CODEC	Manufacturer	Description	Status	File
	Version	Size	Creation Date	
c:\windows\system32\tssoft32.acm	OK	DSP GROUP, INC.		
	1.01	C:\WINDOWS\system32\TSSOFT32.ACM		29.00 KB (29,696 bytes) 11/18/2002 9:00 PM
c:\windows\system32\msadp32.acm	OK	Microsoft Corporation		
	5.2.3718.0 (dnsrv.021114-1947)	C:\WINDOWS\system32\MSADP32.ACM		49.00 KB (50,176 bytes) 11/18/2002 9:00 PM
c:\windows\system32\maadp32.acm	OK	Microsoft Corporation		
	5.2.3718.0 (dnsrv.021114-1947)	C:\WINDOWS\system32\MAADP32.ACM		55.00 KB (56,320 bytes) 11/18/2002 9:00 PM
c:\windows\system32\msgsm32.acm	OK	Microsoft Corporation		
	5.2.3718.0 (dnsrv.021114-1947)	C:\WINDOWS\system32\MSGSM32.ACM		66.50 KB (68,096 bytes) 11/18/2002 9:00 PM
c:\windows\system32\msg711.acm	OK	Microsoft Corporation		
	5.2.3718.0 (dnsrv.021114-1947)	C:\WINDOWS\system32\MSG711.ACM		33.00 KB (33,792 bytes) 11/18/2002 9:00 PM

[Video Codecs]

CODEC	Manufacturer	Description	Status	File
	Version	Size	Creation Date	
c:\windows\system32\msvidc32.dll	OK	Microsoft Corporation		
	5.2.3718.0 (dnsrv.021114-1947)	C:\WINDOWS\system32\MSVIDC32.DLL		67.00 KB (68,608 bytes) 11/18/2002 9:00 PM
c:\windows\system32\msrle32.dll	OK	Microsoft Corporation		
	5.2.3718.0 (dnsrv.021114-1947)	C:\WINDOWS\system32\MSRLE32.DLL		24.50 KB (25,088 bytes) 11/18/2002 9:00 PM

[CD-ROM]

Item	Value
Drive	D:
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	_NEC DVD-ROM DV-5800A

Manufacturer (Standard CD-ROM drives)
 Status OK
 Transfer Rate Not Available
 SCSI Target ID 0
 PNP Device ID IDE\CDROM_NEC_DVD-ROM_DV-5800A
 Driver c:\windows\system32\drivers\cdrom.sys (5.2.3718.0 (dnsrv.021114-1947), 140.50 KB (143,872 bytes), 11/18/2002 9:00 PM)

[Sound Device]

Item	Value
------	-------

[Display]

Item	Value
Name	Standard VGA Graphics Adapter
PNP Device ID	PCI\VEN_1002&DEV_4752&SUBSYS_80EB1033&REV_2713&267A616A&0&20
Adapter Type	ATI MACH64, (Standard display types) compatible
Adapter Description	Standard VGA Graphics Adapter
Adapter RAM	4.00 MB (4,194,304 bytes)
Installed Drivers	vga.dll,framebuf.dll,vga256,vga64k
Driver Version	5.2.3718.0
INF File	display.inf (vga section)
Color Planes	1
Color Table Entries	16777216
Resolution	1024 x 768 x 1 hertz
Bits/Pixel	24
Memory Address	0xFC000000-0xFCFFFFFF
I/O Port	0x00001000-0x000010FF
Memory Address	0xFDFFF000-0xFDFFFFFF
I/O Port	0x000003B0-0x000003BB
I/O Port	0x000003C0-0x000003DF
Memory Address	0xA0000-0xBFFFF
Driver	c:\windows\system32\drivers\vgapnp.sys (5.2.3718.0 (dnsrv.021114-1947), 67.38 KB (68,992 bytes), 2/3/2003 8:00 PM)

[Infrared]

Item	Value
------	-------

[Input]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\2
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1
Driver	c:\windows\system32\drivers\i804prt.sys (5.2.3718.0

(dnsrv.021114-1947), 134.25 KB (137,472 bytes), 11/18/2002 9:00 PM)

[Pointing Device]

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	2
Status	OK
PNP Device ID	ACPI\PNP0F13\2
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
IRQ Channel	IRQ 12
Driver	c:\windows\system32\drivers\i804prt.sys (5.2.3718.0 (dnsrv.021114-1947), 134.25 KB (137,472 bytes), 11/18/2002 9:00 PM)

[Modem]

Item	Value
------	-------

[Network]

[Adapter]

Item	Value
Name	[00000001] Intel(R) PRO/1000 F Server Adapter
Adapter Type	Ethernet 802.3
Product Type	Intel(R) PRO/1000 F Server Adapter
Installed	Yes
PNP Device ID	PCI\VEN_8086&DEV_1001&SUBSYS_10038086&REV_02\3&20FEA912&0&10
Last Reset	2/18/2003 11:38 PM
Index	1
Service Name	E1000
IP Address	10.1.1.222
IP Subnet	255.255.255.0
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:03:47:00:40:A8
Memory Address	0xFABC0000-0xFABDFFFF
Memory Address	0xFABF0000-0xFABFFFFFF
IRQ Channel	IRQ 78
Driver	c:\windows\system32\drivers\le1000645.sys (6.3.6.3 built by: WinDDK, 357.00 KB (365,568 bytes), 2/3/2003 8:00 PM)
Name	[00000002] RAS Async Adapter
Adapter Type	Not Available
Product Type	RAS Async Adapter
Installed	Yes
PNP Device ID	Not Available
Last Reset	2/18/2003 11:38 PM
Index	2
Service Name	AsyncMac
IP Address	Not Available

IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000003] WAN Miniport (L2TP)
Adapter Type Not Available
Product Type WAN Miniport (L2TP)
Installed Yes
PNP Device ID ROOT\MS_L2TP\MINIPORT\0000
Last Reset 2/18/2003 11:38 PM
Index 3
Service Name Rasl2tp
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000004] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPTP)
Installed Yes
PNP Device ID ROOT\MS_PPTP\MINIPORT\0000
Last Reset 2/18/2003 11:38 PM
Index 4
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30

Name [00000005] WAN Miniport (PPPOE)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPPOE)
Installed Yes
PNP Device ID ROOT\MS_PPPOE\MINIPORT\0000
Last Reset 2/18/2003 11:38 PM
Index 5
Service Name Rasppoe
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 33:50:6F:45:30:30

Name [00000006] Direct Parallel
Adapter Type Not Available
Product Type Direct Parallel

Installed Yes
PNP Device ID ROOT\MS_PT\MINIPORT\0000
Last Reset 2/18/2003 11:38 PM
Index 6
Service Name Raspti
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000007] WAN Miniport (IP)
Adapter Type Not Available
Product Type WAN Miniport (IP)
Installed Yes
PNP Device ID ROOT\MS_NDIS\WANIP\0000
Last Reset 2/18/2003 11:38 PM
Index 7
Service Name NdisWan
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Item	Value
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes

Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

[WinSock]

Item	Value
File	c:\windows\system32\wsock32.dll
Size	23.00 KB (23,552 bytes)
Version	5.2.3718.0 (dnssrv.021114-1947)

[Ports]

[Serial]

Item	Value
Name	Communications Port (COM2)
Status	OK
PNP Device ID	ACPI\PNP0501\1
Maximum Input Buffer Size	0

Maximum Output Buffer Size No
 Settable Baud Rate Yes
 Settable Data Bits Yes
 Settable Flow Control Yes
 Settable Parity Yes
 Settable Parity Check Yes
 Settable Stop Bits Yes
 Settable RLSD Yes
 Supports RLSD Yes
 Supports 16 Bit Mode No
 Supports Special Characters No
 Baud Rate 9600
 Bits/Byte 8
 Stop Bits 1
 Parity None
 Busy No
 Abort Read/Write on Error No
 Binary Mode Enabled Yes
 Continue XMit on XOff No
 CTS Outflow Control No
 Discard NULL Bytes No
 DSR Outflow Control 0
 DSR Sensitivity 0
 DTR Flow Control Type Enable
 EOF Character 0
 Error Replace Character 0
 Error Replacement Enabled No
 Event Character 0
 Parity Check Enabled No
 RTS Flow Control Type Enable
 XOff Character 19
 XOffXMit Threshold 512
 XOn Character 17
 XOnXMit Threshold 2048
 XOnXOff InFlow Control 0
 XOnXOff OutFlow Control 0
 I/O Port 0x00002F8-0x000002FF
 IRQ Channel IRQ 245
 Driver c:\windows\system32\drivers\serial.sys (5.2.3718.0
 (dnsrv.021114-1947), 172.25 KB (176,384 bytes), 11/18/2002 9:00
 PM)

 Name Communications Port (COM1)
 Status OK
 PNP Device ID ACPI\PNP0501\2
 Maximum Input Buffer Size 0
 Maximum Output Buffer Size No
 Settable Baud Rate Yes
 Settable Data Bits Yes
 Settable Flow Control Yes
 Settable Parity Yes
 Settable Parity Check Yes
 Settable Stop Bits Yes
 Settable RLSD Yes
 Supports RLSD Yes
 Supports 16 Bit Mode No
 Supports Special Characters No
 Baud Rate 9600
 Bits/Byte 8
 Stop Bits 1
 Parity None
 Busy No

Abort Read/Write on Error No
 Binary Mode Enabled Yes
 Continue XMit on XOff No
 CTS Outflow Control No
 Discard NULL Bytes No
 DSR Outflow Control 0
 DSR Sensitivity 0
 DTR Flow Control Type Enable
 EOF Character 0
 Error Replace Character 0
 Error Replacement Enabled No
 Event Character 0
 Parity Check Enabled No
 RTS Flow Control Type Enable
 XOff Character 19
 XOffXMit Threshold 512
 XOn Character 17
 XOnXMit Threshold 2048
 XOnXOff InFlow Control 0
 XOnXOff OutFlow Control 0
 I/O Port 0x00003F8-0x000003FF
 IRQ Channel IRQ 4
 Driver c:\windows\system32\drivers\serial.sys (5.2.3718.0
 (dnsrv.021114-1947), 172.25 KB (176,384 bytes), 11/18/2002 9:00
 PM)

 [Parallel]

 Item Value

 [Storage]

 [Drives]

 Item Value
 Drive C:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 16.66 GB (17,889,980,416 bytes)
 Free Space 10.77 GB (11,568,914,432 bytes)
 Volume Name
 Volume Serial Number 74F5E6D1

 Drive D:
 Description CD-ROM Disc

 Drive I:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

 Drive J:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available

Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

 Drive K:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

 Drive L:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 418.91 GB (449,799,434,240 bytes)
 Free Space 315.83 GB (339,121,823,744 bytes)
 Volume Name b026
 Volume Serial Number 5C1822E4

 Drive Z:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 32.82 GB (35,237,097,472 bytes)
 Free Space 32.72 GB (35,134,246,912 bytes)
 Volume Name junction
 Volume Serial Number B8E08F74

 [Disks]

 Item Value
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 17
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #60, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #60, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #60, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #60, Partition #3

Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive
Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 1
SCSI Port 17
SCSI Target ID 0
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #61, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #61, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #61, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #61, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive
Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 2
SCSI Port 17
SCSI Target ID 0
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #62, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #62, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #62, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #62, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive
Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 3
SCSI Port 17
SCSI Target ID 0
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #63, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #63, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #63, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #63, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive
Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 17
SCSI Target ID 1
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #64, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #64, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #64, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #64, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 1
SCSI Port 17
SCSI Target ID 1
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #65, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #65, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #65, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #65, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive
Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 2
SCSI Port 17
SCSI Target ID 1
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #66, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #66, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #66, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #66, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive
Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 17
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #67, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #67, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #67, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #67, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 10
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #36, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #36, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #36, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #36, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes

Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 10
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #37, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #37, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #37, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #37, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 10
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #38, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #38, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #38, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #38, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4

SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 10
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #39, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #39, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #39, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #39, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 10
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #40, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #40, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #40, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #40, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1

SCSI Port 10
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #41, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #41, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #41, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #41, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 10
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255

Partition Disk #42, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #42, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #42, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #42, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 10
 SCSI Target ID 1

Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #43, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #43, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #43, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #43, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 7
 SCSI Target ID 0

Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #12, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #12, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #12, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #12, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 7
 SCSI Target ID 0

Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)

Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #13, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #13, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #13, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #13, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 7
 SCSI Target ID 0

Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #14, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #14, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #14, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #14, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 7
 SCSI Target ID 0

Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450

Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #15, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #15, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #15, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #15, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 7
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #16, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #16, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #16, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #16, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 7
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255

Partition Disk #17, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #17, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #17, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #17, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 7
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #18, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #18, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #18, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #18, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 7
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #19, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)

Partition Starting Offset 32,256 bytes
 Partition Disk #19, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #19, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #19, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 4
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #4, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #4, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #4, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #4, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 4
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #5, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #5, Partition #1

Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #5, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #5, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 4
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #6, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #6, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #6, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #6, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 4
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #7, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #7, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes

Partition Disk #7, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #7, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 4
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #8, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #8, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #8, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #8, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 4
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #9, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #9, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #9, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)

Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #9, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 4
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #10, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #10, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #10, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #10, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 4
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #11, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #11, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #11, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #11, Partition #3

Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 13
SCSI Target ID 0
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #44, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #44, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #44, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #44, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 1
SCSI Port 13
SCSI Target ID 0
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #45, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #45, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #45, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #45, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 2
SCSI Port 13
SCSI Target ID 0
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #46, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #46, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #46, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #46, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 3
SCSI Port 13
SCSI Target ID 0
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #47, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #47, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #47, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #47, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 4
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 13
SCSI Target ID 1
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #48, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #48, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #48, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #48, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 1
SCSI Port 13
SCSI Target ID 1
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #49, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #49, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #49, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #49, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 13
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #50, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #50, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #50, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #50, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 13
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #51, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #51, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #51, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #51, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes

Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 8
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #20, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #20, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #20, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #20, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 8
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #21, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #21, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #21, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #21, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4

SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 8
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #22, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #22, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #22, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #22, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 8
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #23, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #23, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #23, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #23, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0

SCSI Port 8
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #24, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #24, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #24, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #24, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk

Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 8
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #25, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #25, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #25, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #25, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 8
 SCSI Target ID 1

Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #26, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #26, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #26, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #26, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk

Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 8
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #27, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #27, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #27, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #27, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk

Partitions 2
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 3
 SCSI Target ID 0
 Sectors/Track 63
 Size 232.83 GB (249,999,160,320 bytes)

Total Cylinders 30,394
 Total Sectors 488,279,610
 Total Tracks 7,750,470
 Tracks/Cylinder 255
 Partition Disk #0, Partition #0
 Partition Size 200.01 GB (214,753,803,264 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #0, Partition #1
 Partition Size 32.82 GB (35,237,099,520 bytes)
 Partition Starting Offset 214,753,835,520 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk

Partitions 2
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 3
 SCSI Target ID 0
 Sectors/Track 63
 Size 232.83 GB (249,999,160,320 bytes)
 Total Cylinders 30,394
 Total Sectors 488,279,610
 Total Tracks 7,750,470
 Tracks/Cylinder 255
 Partition Disk #1, Partition #0
 Partition Size 200.01 GB (214,753,803,264 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #1, Partition #1
 Partition Size 32.82 GB (35,237,099,520 bytes)
 Partition Starting Offset 214,753,835,520 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk

Partitions 2
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 3
 SCSI Target ID 0
 Sectors/Track 63
 Size 232.83 GB (249,999,160,320 bytes)
 Total Cylinders 30,394
 Total Sectors 488,279,610
 Total Tracks 7,750,470
 Tracks/Cylinder 255
 Partition Disk #2, Partition #0
 Partition Size 200.01 GB (214,753,803,264 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #2, Partition #1
 Partition Size 32.82 GB (35,237,099,520 bytes)
 Partition Starting Offset 214,753,835,520 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 3
 SCSI Target ID 0
 Sectors/Track 63
 Size 232.83 GB (249,999,160,320 bytes)
 Total Cylinders 30,394
 Total Sectors 488,279,610
 Total Tracks 7,750,470
 Tracks/Cylinder 255
 Partition Disk #3, Partition #0
 Partition Size 200.01 GB (214,753,803,264 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #3, Partition #1
 Partition Size 32.82 GB (35,237,099,520 bytes)
 Partition Starting Offset 214,753,835,520 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 18
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #68, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #68, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #68, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #68, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 18
 SCSI Target ID 0

Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #69, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #69, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #69, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #69, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 18
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #70, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #70, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #70, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #70, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 18
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)

Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #71, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #71, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #71, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #71, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 18
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #72, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #72, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #72, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #72, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 18
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450

Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #73, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #73, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #73, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #73, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 18
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #74, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #74, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #74, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #74, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 18
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255

Partition Disk #75, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #75, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #75, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #75, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 14
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #52, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #52, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #52, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #52, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 14
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #53, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)

Partition Starting Offset 32,256 bytes
 Partition Disk #53, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #53, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #53, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 14
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #54, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #54, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #54, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #54, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 14
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #55, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #55, Partition #1

Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #55, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #55, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 14
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #56, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #56, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #56, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #56, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 14
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #57, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #57, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes

Partition Disk #57, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #57, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 2
 SCSI Port 14
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #58, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #58, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #58, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #58, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 3
 SCSI Port 14
 SCSI Target ID 1
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #59, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #59, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #59, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)

Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #59, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 9
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #28, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #28, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #28, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #28, Partition #3
 Partition Size 418.91 GB (449,799,436,800 bytes)
 Partition Starting Offset 85,913,049,600 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model NEC iStorage 2000 SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 4
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 9
 SCSI Target ID 0
 Sectors/Track 63
 Size 498.92 GB (535,712,486,400 bytes)
 Total Cylinders 65,130
 Total Sectors 1,046,313,450
 Total Tracks 16,608,150
 Tracks/Cylinder 255
 Partition Disk #29, Partition #0
 Partition Size 20.00 GB (21,476,173,824 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #29, Partition #1
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 21,476,206,080 bytes
 Partition Disk #29, Partition #2
 Partition Size 30.01 GB (32,218,421,760 bytes)
 Partition Starting Offset 53,694,627,840 bytes
 Partition Disk #29, Partition #3

Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 2
SCSI Port 9
SCSI Target ID 0
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #30, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #30, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #30, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #30, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 3
SCSI Port 9
SCSI Target ID 0
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #31, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #31, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #31, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #31, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 9
SCSI Target ID 1
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #32, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #32, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #32, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #32, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 1
SCSI Port 9
SCSI Target ID 1
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #33, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #33, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #33, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #33, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 4
SCSI Bus 0
SCSI Logical Unit 2
SCSI Port 9
SCSI Target ID 1
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #34, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #34, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #34, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #34, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model NEC iStorage 2000 SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 4
SCSI Bus 0
SCSI Logical Unit 3
SCSI Port 9
SCSI Target ID 1
Sectors/Track 63
Size 498.92 GB (535,712,486,400 bytes)
Total Cylinders 65,130
Total Sectors 1,046,313,450
Total Tracks 16,608,150
Tracks/Cylinder 255
Partition Disk #35, Partition #0
Partition Size 20.00 GB (21,476,173,824 bytes)
Partition Starting Offset 32,256 bytes
Partition Disk #35, Partition #1
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 21,476,206,080 bytes
Partition Disk #35, Partition #2
Partition Size 30.01 GB (32,218,421,760 bytes)
Partition Starting Offset 53,694,627,840 bytes
Partition Disk #35, Partition #3
Partition Size 418.91 GB (449,799,436,800 bytes)
Partition Starting Offset 85,913,049,600 bytes

DescriptionDisk drive

Manufacturer (Standard disk drives)
Model SEAGATE ST318203LC SCSI Disk Device

Bytes/Sector 512
 Media Loaded No
 Media Type Fixed hard disk
 Partitions Not Available
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 20
 SCSI Target ID 11
 Sectors/Track 63
 Size 16.95 GB (18,202,544,640 bytes)
 Total Cylinders 2,213
 Total Sectors 35,551,845
 Total Tracks 564,315
 Tracks/Cylinder 255
 Partition Disk #76, Partition #0
 Partition Size 172.54 MB (180,923,904 bytes)
 Partition Starting Offset 32,256 bytes
 Partition Disk #76, Partition #1
 Partition Size 16.66 GB (17,889,984,000 bytes)
 Partition Starting Offset 312,560,640 bytes

[SCSI]

Item Value
 Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&1070020&0&10
 I/O Port 0x00001200-0x000012FF
 Memory Address 0xFBFF000-0xFBFFFFFF
 IRQ Channel IRQ 64
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name Adaptec SCSI Card 39160 - Ultra160 SCSI
 Manufacturer Adaptec
 Status OK
 PNP Device ID
 PCI\VEN_9005&DEV_00C0&SUBSYS_F6209005&REV_01\3&29E81982&0&10
 I/O Port 0x00001300-0x000014FF
 Memory Address 0xFB7FF000-0xFB7FFFFF
 IRQ Channel IRQ 68
 Driver c:\windows\system32\drivers\adpu160m.sys (RTC_XP07 (lab01_n(storbuild).010917-1859), 319.88 KB (327,552 bytes), 11/18/2002 9:00 PM)

Name Adaptec SCSI Card 39160 - Ultra160 SCSI
 Manufacturer Adaptec
 Status OK
 PNP Device ID
 PCI\VEN_9005&DEV_00C0&SUBSYS_F6209005&REV_01\3&29E81982&0&11
 I/O Port 0x00001400-0x000014FF
 Memory Address 0xFB7FE000-0xFB7FEFFF
 IRQ Channel IRQ 67
 Driver c:\windows\system32\drivers\adpu160m.sys (RTC_XP07 (lab01_n(storbuild).010917-1859), 319.88 KB (327,552 bytes), 11/18/2002 9:00 PM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&172E68DD&0&10
 I/O Port 0x00001500-0x000015FF
 Memory Address 0xFB3FF000-0xFB3FFFFF
 IRQ Channel IRQ 69
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&474B838&0&10
 I/O Port 0x00001600-0x000016FF
 Memory Address 0xFAFFF000-0xFAFFFFFF
 IRQ Channel IRQ 73
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&AD74055&0&10
 I/O Port 0x00001700-0x000017FF
 Memory Address 0xFA7FF000-0xFA7FFFFF
 IRQ Channel IRQ 84
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&23C0707C&0&10
 I/O Port 0x00001800-0x000018FF
 Memory Address 0xFA3FF000-0xFA3FFFFF
 IRQ Channel IRQ 86
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&1B2F0CE&0&10
 I/O Port 0x00001900-0x000019FF
 Memory Address 0xF9FFF000-0xF9FFFFFF
 IRQ Channel IRQ 91
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic

Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&146CA173&0&10
 I/O Port 0x00001A00-0x00001AFF
 Memory Address 0xF9BFF000-0xF9BFFFFFFF
 IRQ Channel IRQ 95
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&39E002BD&0&10
 I/O Port 0x00001B00-0x00001BFF
 Memory Address 0xF97FF000-0xF97FFFFF
 IRQ Channel IRQ 100
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&1D521019&0&10
 I/O Port 0x00001C00-0x00001CFF
 Memory Address 0xF93FF000-0xF93FFFFF
 IRQ Channel IRQ 150
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&300BC0BE&0&10
 I/O Port 0x00001D00-0x00001DFF
 Memory Address 0xF8FFF000-0xF8FFFFFFF
 IRQ Channel IRQ 152
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID
 PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&19E45801&0&10
 I/O Port 0x00001E00-0x00001EFF
 Memory Address 0xF8BFF000-0xF8BFFFFFFF
 IRQ Channel IRQ 157
 Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
 Manufacturer QLogic
 Status OK
 PNP Device ID

PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&2C9E08A6&0&10
I/O Port 0x00001F00-0x00001FFF
Memory Address 0xF87FF000-0xF87FFFFF
IRQ Channel IRQ 161
Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
Manufacturer QLogic
Status OK
PNP Device ID PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&36B90202&0&10
I/O Port 0x00002000-0x000020FF
Memory Address 0xF83FF000-0xF83FFFFF
IRQ Channel IRQ 166
Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
Manufacturer QLogic
Status OK
PNP Device ID PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&1145A0B8&0&10
I/O Port 0x00002100-0x000021FF
Memory Address 0xF7FFF000-0xF7FFFFF
IRQ Channel IRQ 172
Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
Manufacturer QLogic
Status OK
PNP Device ID PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&D525062&0&08
I/O Port 0x00002200-0x000022FF
Memory Address 0xF7BFF000-0xF7BFFFFF
IRQ Channel IRQ 174
Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
Manufacturer QLogic
Status OK
PNP Device ID PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&32C5B1AC&0&10
I/O Port 0x00002300-0x000023FF
Memory Address 0xF77FF000-0xF77FFFFF
IRQ Channel IRQ 179
Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
Manufacturer QLogic
Status OK
PNP Device ID PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&7B03F9A&0&10

I/O Port 0x00002400-0x000024FF
Memory Address 0xF73FF000-0xF73FFFFF
IRQ Channel IRQ 183
Driver c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 10 (W64 VI), 676.38 KB (692,608 bytes), 2/5/2003 1:24 AM)

Name QLogic QLA23xx PCI Fibre Channel Adapter
Manufacturer QLogic
Status OK
PNP Device ID PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&1DD7A857&0&10
I/O Port 0x00002500-0x000025FF
Memory Address 0xF6FFF000-0xF6FFFFF
IRQ Channel IRQ 188

[IDE]

Item	Value
Name	Intel(r) IA64 Bus Master IDE Controller
Manufacturer	Intel
Status	OK
PNP Device ID	PCI\VEN_8086&DEV_7601&SUBSYS_01061033&REV_01\3&267A616A&0&11
I/O Port	0x00001120-0x0000112F
Driver	c:\windows\system32\drivers\intelide.sys (5.2.3718.0 (dnsrv.021114-1947), 8.75 KB (8,960 bytes), 11/18/2002 9:00 PM)
Name	Primary IDE Channel
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCI\IDE\IDECHANNEL4&31FC9C45&0&0
I/O Port	0x000001F0-0x000001F7
I/O Port	0x000003F6-0x000003F6
IRQ Channel	IRQ 14
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3718.0 (dnsrv.021114-1947), 282.13 KB (288,896 bytes), 11/18/2002 9:00 PM)

[Printing]

Name	Driver	Port Name	Server Name
[Problem Devices]			
Device	PNP Device ID	Error Code	
System Interrupt Controller	PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&267A616A&0&08	The drivers for this device are not installed.	
Not Available	ACPI\NEC4171\0	The drivers for this device are not installed.	
System Interrupt Controller	PCI\VEN_1033&DEV_00FD&SUBSYS_00FD1033&REV_00\3&267A616A&0&70	The drivers for this device are not installed.	
System Interrupt Controller	PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&1070020&0&08	The drivers for this device are not installed.	
System Interrupt Controller	PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&267A616A&0&08	The drivers for this device are not installed.	

00\3&172E68DD&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&E44F86D&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&33B859B7&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&23C0707C&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&1B2FOCE&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&27265218&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&A985F74&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&300BC0BE&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&19E45801&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&3BCE44&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&23FF515D&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&D525062&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&32C5B1AC&0&08 The drivers for this device are not installed.
System Interrupt Controller
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&309158FC&0&08 The drivers for this device are not installed.

[USB]

Device	PNP Device ID
Intel(r) 82372FB PCI to USB Universal Host Controller	PCI\VEN_8086&DEV_7602&SUBSYS_01061033&REV_01\3&267A616A&0&12
USB Root Hub	USB\ROOT_HUB4&5C3BD33&0

[Software Environment]

[System Drivers]

Name	Description	File	Type	Started	Start Mode
	State	Status	Error Control		Accept
Pause	Accept	Stop			
abiosdsk	Abiosdsk	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Ignore
	No	No			
acpi	Microsoft ACPI Driver				
Driver	Yes	Boot	Running	OK	Normal
	No	Yes			
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys			
Kernel Driver	No	Disabled	Stopped		
	OK	Normal	No	No	
adpu160m	adpu160m	c:\windows\system32\drivers\adpu160m.sys			
Kernel Driver	Yes	Boot	Running		
	OK	Normal	No	Yes	
adpu320	adpu320	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
afcnt	afcnt	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
afd	AFD Networking Support Environment				
Driver	Yes	Auto	Running	OK	Normal
	No	Yes			
aic78u2	aic78u2	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
aic78xx	aic78xx	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
aliide	Alilde	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
asynccmac	RAS Asynchronous Media Driver				
Driver	No	Manual	Stopped	OK	Normal
	No	No			
atapi	Standard IDE/ESDI Hard Disk Controller				
Driver	Yes	Boot	Running	OK	Normal
	No	Yes			
atdisk	Atdisk	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Ignore
	No	No			
atmarpc	ATM ARP Client Protocol				
Driver	No	Manual	Stopped	OK	Normal
	No	No			
audstub	Audio Stub Driver				
Driver	Yes	Manual	Running	OK	Normal
	No	Yes			
beep	Beep	c:\windows\system32\drivers\beep.sys			
Kernel Driver	Yes	System	Running		
	OK	Normal	No	Yes	
cbidf2k	cbidf2k	c:\windows\system32\drivers\cbidf2k.sys			
Kernel Driver	No	Disabled	Stopped		
	OK	Normal	No	No	
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys			
File System Driver	Yes	Disabled	Running		

cdrom	OK	Normal	No	Yes	
	CD-ROM Driver				
Driver	Yes	System	Running	OK	Normal
	No	Yes			
changer	Changer	Not Available	Kernel Driver		
	No	System	Stopped	OK	Ignore
	No	No			
clusdisk	Cluster Disk Driver				
Driver	No	Disabled	Stopped	OK	Normal
	No	No			
cmdide	CmdIde	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
cpqarry2	cpqarry2	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
cpqcissm	cpqcissm	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
cpqfcalm	cpqfcalm	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
crdisk	CRC Disk Filter Driver				
Driver	Yes	Boot	Running	OK	Normal
	No	Yes			
dfsdriver	DfsDriver	c:\windows\system32\drivers\dfs.sys			
File System Driver	Yes	Boot	Running		
	OK	Normal	No	Yes	
disk	Disk Driver	c:\windows\system32\drivers\disk.sys			
Kernel Driver	Yes	Boot	Running		
	OK	Normal	No	Yes	
dmboot	dmboot	c:\windows\system32\drivers\dmboot.sys			
Kernel Driver	No	Disabled	Stopped		
	OK	Normal	No	No	
dmio	Logical Disk Manager Driver				
Driver	Yes	Boot	Running	OK	Normal
	No	Yes			
dmload	dmload	c:\windows\system32\drivers\dmload.sys			
Kernel Driver	Yes	Boot	Running		
	OK	Normal	No	Yes	
e1000	Intel(R) PRO/1000 Device Driver				
Driver	Yes	Manual	Running	OK	Normal
	No	Yes			
fastfat	Fastfat	c:\windows\system32\drivers\fastfat.sys			
File System Driver	Yes	Disabled	Running		
	OK	Normal	No	Yes	
fdc	Fdc	c:\windows\system32\drivers\fdc.sys			
Kernel Driver	No	System	Stopped		
	OK	Ignore	No	No	
fips	Fips	c:\windows\system32\drivers\fips.sys			
Kernel Driver	Yes	System	Running		
	OK	Normal	No	Yes	
flpydisk	Flpydisk	c:\windows\system32\drivers\flpydisk.sys			
Kernel Driver	No	System	Stopped		
	OK	Ignore	No	No	
ftdisk	Volume Manager Driver				
	c:\windows\system32\drivers\ftdisk.sys				Kernel

Driver	Yes	Boot	Running	OK	Normal
	No	Yes			
gpc	Generic Packet Classifier				
Driver	Yes	System	Running		Kernel
	No	Yes			Normal
hpn	hpn	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
http	HTTP	c:\windows\system32\drivers\http.sys			
Kernel Driver	No	Manual	Stopped		
	OK	Normal	No	No	
i2omgmt	i2omgmt	Not Available	Kernel Driver		
	No	System	Stopped	OK	Normal
	No	No			
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver				
Driver	Yes	System	Running	OK	Normal
	No	Yes			
imapi	CD-Burning Filter Driver				
Driver	No	System	Stopped	OK	Normal
	No	No			
intelide	IntelIde	c:\windows\system32\drivers\intelide.sys			
Kernel Driver	Yes	Boot	Running		
	OK	Normal	No	Yes	
ipfilterdriver	IP Traffic Filter Driver				
Driver	No	Manual	Stopped	OK	Normal
	No	No			
ipinip	IP in IP Tunnel Driver				
Driver	No	Manual	Stopped	OK	Normal
	No	No			
ipnat	IP Network Address Translator				
Driver	No	Manual	Stopped	OK	Normal
	No	No			
ipsec	IPSEC driver				
Driver	Yes	System	Running	OK	Normal
	No	Yes			
isapnp	PnP ISA/EISA Bus Driver				
Driver	Yes	Boot	Running	OK	Critical
	No	Yes			
kbdclass	Keyboard Class Driver				
Driver	Yes	System	Running	OK	Normal
	No	Yes			
ksecdd	KSecDD	c:\windows\system32\drivers\ksecdd.sys			
Kernel Driver	Yes	Boot	Running		
	OK	Normal	No	Yes	
lp6nds35	lp6nds35	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
mnmdd	mnmdd	Not Available	Kernel Driver		
	No	System	Stopped	OK	Ignore
	No	No			
modem	Modem	c:\windows\system32\drivers\modem.sys			
Kernel Driver	No	Manual	Stopped		
	OK	Ignore	No	No	

mouclass	Mouse Class Driver					
Driver	Yes	System	Running	OK	Kernel	Normal
	No	Yes				
mountmgr	Mount Point Manager					
Driver	Yes	Boot	Running	OK	Kernel	Normal
	No	Yes				
mraid35x	mraid35x	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
mrxdav	WebDav Client Redirector					
System Driver	No	Manual	Stopped	OK	File	
	Normal	No				
mrx smb	MRXSMB	c:\windows\system32\drivers\mrx smb.sys				
	File System Driver	Yes	System	Running		
	OK	Normal	No	Yes		
msfs	Msf	c:\windows\system32\drivers\msfs.sys				
	File System Driver	Yes	System	Running		
	OK	Normal	No	Yes		
mup	Mup	c:\windows\system32\drivers\mup.sys				
	File System Driver	Yes	Boot	Running		
	OK	Normal	No	Yes		
ndis	NDIS System Driver					
Driver	Yes	Boot	Running	OK	Kernel	Normal
	No	Yes				
ndistapi	Remote Access NDIS TAPI Driver					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
ndisuio	NDIS Usermode I/O Protocol					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
ndiswan	Remote Access NDIS WAN Driver					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
ndproxy	NDIS Proxy					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
netbios	NetBIOS Interface					
System Driver	Yes	System	Running	OK	File	
	Normal	No	Yes			
netbt	NetBios over Tcpip					
Driver	Yes	System	Running	OK	Kernel	Normal
	No	Yes				
nfrd960	nfrd960	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
npfs	Npfs	c:\windows\system32\drivers\npfs.sys				
	File System Driver	Yes	System	Running		
	OK	Normal	No	Yes		
ntfs	Ntfs	c:\windows\system32\drivers\ntfs.sys				
	File System Driver	Yes	Disabled	Running		
	OK	Normal	No	Yes		
null	Null	c:\windows\system32\drivers\null.sys				

	Kernel Driver	Yes	System	Running		
	OK	Normal	No	Yes		
partmgr	Partition Manager					
Driver	Yes	Boot	Running	OK	Kernel	Normal
	No	Yes				
pci	PCI Bus Driver					
Driver	Yes	Boot	Running	OK	Kernel	Critical
	No	Yes				
pciide	PCIIde	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
pcmcia	Pcmcia	c:\windows\system32\drivers\pcmcia.sys				
	Kernel Driver	No	Disabled	Stopped		
	OK	Normal	No	No		
pdcomp	PDCOMP	Not Available			Kernel Driver	
	No	Manual	Stopped	OK	Kernel	Ignore
	No	No				
pdframe	PDFRAME	Not Available			Kernel Driver	
	No	Manual	Stopped	OK	Kernel	Ignore
	No	No				
pdreli	PDRELI	Not Available			Kernel Driver	
	No	Manual	Stopped	OK	Kernel	Ignore
	No	No				
pdrframe	PDRFRAME	Not Available			Kernel	
Driver	No	Manual	Stopped	OK	Kernel	Ignore
	No	No				
pptpminiport	WAN Miniport (PPTP)					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
processor	Processor Driver					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
ptilink	Direct Parallel Link Driver					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
ql1080	ql1080	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
ql10wnt	Ql10wnt	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
ql12160	ql12160	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
ql1240	ql1240	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
ql1280	ql1280	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
ql2100	ql2100	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
ql2200	ql2200	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
ql2300	ql2300	c:\windows\system32\drivers\ql2300.sys				

	Kernel Driver	Yes	Boot	Running		
	OK	Normal	No	Yes		
qldirect	qldirect	c:\windows\system32\drivers\qldirect.sys				
	Kernel Driver	Yes	Boot	Running		
	OK	Normal	No	Yes		
qlvika	qlvika	c:\windows\system32\drivers\qlvika.sys				
	Kernel Driver	Yes	Auto	Running		
	OK	Normal	No	Yes		
rasacd	Remote Access Auto Connection Driver					
Driver	Yes	System	Running	OK	Kernel	Normal
	No	Yes				
rasl2tp	WAN Miniport (L2TP)					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
raspppoe	Remote Access PPPOE Driver					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
raspti	Direct Parallel					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
rdbss	Rdbss	c:\windows\system32\drivers\rdbss.sys				
	File System Driver	Yes	System	Running		
	OK	Normal	No	Yes		
rdpccd	RDPCCDD	c:\windows\system32\drivers\rdpccd.sys				
	Kernel Driver	Yes	System	Running		
	OK	Ignore	No	Yes		
rdpdr	Terminal Server Device Redirector Driver					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
rdpwd	RDPWD	c:\windows\system32\drivers\rdpwd.sys				
	Kernel Driver	No	Manual	Stopped		
	OK	Ignore	No	No		
redbook	Digital CD Audio Playback Filter Driver					
Driver	Yes	System	Running	OK	Kernel	Normal
	No	Yes				
serenum	Serenum Filter Driver					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				
serial	Serial port driver					
Driver	Yes	System	Running	OK	Kernel	Ignore
	No	Yes				
sfloppy	Sfloppy	c:\windows\system32\drivers\sfloppy.sys				
	Kernel Driver	No	System	Stopped		
	OK	Ignore	No	No		
simbad	Simbad	Not Available			Kernel Driver	
	No	Disabled	Stopped	OK	Kernel	Normal
	No	No				
srv	Srv	c:\windows\system32\drivers\srv.sys				
	File System Driver	Yes	Manual	Running		
	OK	Normal	No	Yes		
swenum	Software Bus Driver					
Driver	Yes	Manual	Running	OK	Kernel	Normal
	No	Yes				

symc8xx	symc8xx	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
symmpi	symmpi	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
sym_hi	sym_hi	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
sym_u3	sym_u3	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
tcpip	TCP/IP Protocol Driver				
Driver	Yes	System	Running	OK	Normal
	No	Yes			
tdpipe	TDPIPE	c:\windows\system32\drivers\tdpipe.sys	Kernel Driver	No	Manual
	OK	Ignore	No	No	Stopped
tdtcp	TDTCP	c:\windows\system32\drivers\tdtcp.sys	Kernel Driver	No	Manual
	OK	Ignore	No	No	Stopped
termdd	Terminal Device Driver				
Driver	Yes	System	Running	OK	Normal
	No	Yes			
toside	Toside	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
udfs	Udfs	c:\windows\system32\drivers\udfs.sys	File System Driver	No	Disabled
	OK	Normal	No	No	Stopped
usbhub	USB2 Enabled Hub				
Driver	Yes	Manual	Running	OK	Normal
	No	Yes			
usbuhci	Microsoft USB Universal Host Controller Miniport Driver				
Driver	Yes	Manual	Running	OK	Normal
	No	Yes			
vga	vga	c:\windows\system32\drivers\vgapnp.sys	Kernel Driver	Yes	Manual
	OK	Ignore	No	Yes	Running
vgasave	VGA Display Controller.				
Driver	No	System	Stopped	OK	Ignore
	No	No			
viaide	Vialde	Not Available	Kernel Driver		
	No	Disabled	Stopped	OK	Normal
	No	No			
volsnap	Storage volumes				
Driver	Yes	Boot	Running	OK	Normal
	No	Yes			
wanarp	Remote Access IP ARP Driver				
Driver	Yes	Manual	Running	OK	Normal
	No	Yes			
wdica	WDICA	Not Available	Kernel Driver		
	No	Manual	Stopped	OK	Ignore
	No	No			
wlbs	Network Load Balancing				

	c:\windows\system32\drivers\wlbs.sys	Kernel Driver	No	Manual	Stopped	OK	Normal
	No	No					
	[Signed Drivers]						
	Device Name	Signed	Device Class	Driver			
	Version	Driver Date	Manufacturer	INF Name	Driver		
	Name	Device ID					
	Not Available	Not Available	Not Available	Not Available	Not Available		
	Available	Not Available	Not Available	Not Available	Not Available		
	HTREE\ROOT\0						
	ACPI IA64-based PC	Yes	COMPUTER		5.2.3718.0		
	10/1/2002	(Standard computers)	hal.inf		Not Available		
	Available	ROOT\ACPI_HAL\0000					
	Microsoft ACPI-Compliant System	Yes	SYSTEM		5.2.3718.0		
	10/1/2002	Microsoft	acpi.inf		Not Available		
	ACPI_HAL\PNP\0C08\0						
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_0					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_1					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_2					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_3					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_4					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_5					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_6					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_7					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_8					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_9					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_25					

	_IA64_FAMILY_31_MODEL_0_10						
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_11					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_12					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_13					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_14					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_15					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_16					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_17					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_18					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_19					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_20					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_21					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_22					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_23					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_24					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	
	(Standard processor types)				cpu.inf	Not Available	
	Available	ACPI\GENUINEINTEL_-_IA64_FAMILY_31_MODEL_0_25					
	Processor	Yes	PROCESSOR		5.2.3718.0	10/1/2002	

(Standard processor types)	cpu.inf	Not	
Available ACPI\GENUINEINTEL_			
IA64_FAMILY_31_MODEL_0126			
Processor Yes	PROCESSOR	5.2.3718.0	10/1/2002
(Standard processor types)	cpu.inf	Not	
Available ACPI\GENUINEINTEL_			
IA64_FAMILY_31_MODEL_0127			
Processor Yes	PROCESSOR	5.2.3718.0	10/1/2002
(Standard processor types)	cpu.inf	Not	
Available ACPI\GENUINEINTEL_			
IA64_FAMILY_31_MODEL_0128			
Processor Yes	PROCESSOR	5.2.3718.0	10/1/2002
(Standard processor types)	cpu.inf	Not	
Available ACPI\GENUINEINTEL_			
IA64_FAMILY_31_MODEL_0129			
Processor Yes	PROCESSOR	5.2.3718.0	10/1/2002
(Standard processor types)	cpu.inf	Not	
Available ACPI\GENUINEINTEL_			
IA64_FAMILY_31_MODEL_0130			
Processor Yes	PROCESSOR	5.2.3718.0	10/1/2002
(Standard processor types)	cpu.inf	Not	
Available ACPI\GENUINEINTEL_			
IA64_FAMILY_31_MODEL_0131			
PCI bus Yes	SYSTEM	5.2.3718.0	10/1/2002 (Standard system devices)
machine.inf		Not Available	
ACPI\PNP0A03\0			
System Interrupt Controller	Not Available		
UNKNOWN	Not Available	Not	
Available	Not Available	Not Available	Not
Available			
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&267A616A&0&08			
Intel 82372FB PCI to ISA Bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002	Intel	machine.inf	Not
Available			
PCI\VEN_8086&DEV_7600&SUBSYS_00000000&REV_01\3&267A616A&0&10			
Direct memory access controller	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available	ACPI\PNP0200\4&22C34DB0&0		
Programmable interrupt controller	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available	ACPI\PNP0000\4&22C34DB0&0		
System timer	Yes	SYSTEM	5.2.3718.0
(Standard system devices)			machine.inf
Not Available	ACPI\PNP0100\4&22C34DB0&0		
System speaker	Yes	SYSTEM	5.2.3718.0
(Standard system devices)			machine.inf
Not Available	ACPI\PNP0800\4&22C34DB0&0		
System CMOS/real time clock	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available	ACPI\PNP0B00\4&22C34DB0&0		
Numeric data processor	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available	ACPI\PNP0C04\4&22C34DB0&0		
Generic Bus	Yes	SYSTEM	5.2.3718.0
(Standard system devices)			machine.inf
Not Available	ACPI\PNP0A05\4&22C34DB0&0		
Extended IO Bus	Yes	SYSTEM	5.2.3718.0
(Standard system devices)			machine.inf
Not Available	ACPI\PNP0A06\1		
Motherboard resources	Yes	SYSTEM	5.2.3718.0

10/1/2002 (Standard system devices)	machine.inf		
Not Available	ACPI\PNP0C02\1		
Extended IO Bus	Yes	SYSTEM	5.2.3718.0
(Standard system devices)			machine.inf
Not Available	ACPI\PNP0A06\3		
Motherboard resources	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available	ACPI\PNP0C02\3		
Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	Yes	KEYBOARD	5.2.3718.0
(Standard keyboards)			keyboard.inf
Not Available			
Available	ACPI\PNP0303\2		
PS/2 Compatible Mouse	Yes	MOUSE	5.2.3718.0
10/1/2002	Microsoft	msmouse.inf	Not
Available	ACPI\PNP0F13\2		
Communications Port	Yes	PORTS	5.2.3718.0
(Standard port types)			msports.inf
Not Available	ACPI\PNP0501\2		
Extended IO Bus	Yes	SYSTEM	5.2.3718.0
(Standard system devices)			machine.inf
Not Available	ACPI\PNP0A06\4		
Not Available	Not Available	Not Available	Not Available
Not Available	Not Available	Not Available	Not
Available	Not Available	Not Available	
ACPI\NEC4171\0			
Intel(r) IA64 Bus Master IDE Controller	Yes	HDC	
5.2.3718.0	10/1/2002	Intel	mshdc.inf
Not			
Available			
PCI\VEN_8086&DEV_7601&SUBSYS_01061033&REV_01\3&267A616A&0&11			
Primary IDE Channel	Yes	HDC	5.2.3718.0
(Standard IDE ATA/ATAPI controllers)			mshdc.inf
Not Available			
PCI\IDE\IDECHANNEL4&31FC9C45&0&0			
CD-ROM Drive	Yes	CDROM	5.2.3718.0
(Standard CD-ROM drives)			cdrom.inf
Not Available			
Available	IDE\CDROM_NEC_DVD-ROM_DV-5800A_____1.42_____5&8F26A51&0&0.0.0		
Intel(r) 82372FB PCI to USB Universal Host Controller	Yes		
USB	5.2.3718.0	10/1/2002	Intel
usbport.inf			
Not Available			
PCI\VEN_8086&DEV_7602&SUBSYS_01061033&REV_01\3&267A616A&0&12			
USB Root Hub	Yes	USB	5.2.3718.0
(Standard USB Host Controller)			usbport.inf
Not Available			
Available	USB\ROOT_HUB\4&5C3BD33&0		
Standard VGA Graphics Adapter	Yes	DISPLAY	5.2.3718.0
(Standard display types)			display.inf
Not Available			
Not Available			
PCI\VEN_1002&DEV_4752&SUBSYS_80EB1033&REV_27\3&267A616A&0&20			
Default Monitor	Yes	MONITOR	5.1.2001.0
(Standard monitor types)			6/6/2001
monitor.inf			Not
Not Available			
Available			
DISPLAY\DEFAULT_MONITOR\4&20D43725&0&12345678&00&04			
System Interrupt Controller	Not Available		
UNKNOWN	Not Available	Not	
Available	Not Available	Not Available	Not
Available			
PCI\VEN_1033&DEV_00FD&SUBSYS_00FD1033&REV_00\3&267A616A&0&70			

PCI standard host CPU bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available			
PCI\VEN_1033&DEV_00F9&SUBSYS_00000000&REV_02\3&267A616A&0&78			
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available			
PCI\VEN_1033&DEV_00F9&SUBSYS_00000000&REV_02\3&267A616A&0&80			
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available			
PCI\VEN_1033&DEV_00F9&SUBSYS_00000000&REV_02\3&267A616A&0&88			
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available			
PCI\VEN_1033&DEV_00F9&SUBSYS_00000000&REV_02\3&267A616A&0&90			
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available			
PCI\VEN_1033&DEV_00F9&SUBSYS_00000000&REV_02\3&267A616A&0&98			
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available			
PCI\VEN_1033&DEV_00F9&SUBSYS_00000000&REV_02\3&267A616A&0&A0			
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available			
PCI\VEN_1033&DEV_00F9&SUBSYS_00000000&REV_02\3&267A616A&0&A8			
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available			
PCI\VEN_1033&DEV_00F9&SUBSYS_00000000&REV_02\3&267A616A&0&B0			
PCI standard host CPU bridge	Yes	SYSTEM	5.2.3718.0
10/1/2002 (Standard system devices)			machine.inf
Not Available			
PCI\VEN_1033&DEV_00F9&SUBSYS_00000000&REV_02\3&267A616A&0&B8			
Communications Port	Yes	PORTS	5.2.3718.0
(Standard port types)			msports.inf
Not Available			
ACPI\PNP0501\1			
PCI bus	Yes	SYSTEM	5.2.3718.0
(Standard system devices)			10/1/2002 (Standard system devices)
machine.inf		Not Available	
ACPI\PNP0A03\1			
PCI bus	Yes	SYSTEM	5.2.3718.0
(Standard system devices)			10/1/2002 (Standard system devices)
machine.inf		Not Available	
ACPI\PNP0A03\2			
System Interrupt Controller	Not Available		
UNKNOWN	Not Available	Not	
Available	Not Available	Not Available	Not
Available			
PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&1070020&0&08			
QLogic QLA23xx PCI Fibre Channel Adapter	No		
SCSIADAPTER	8.2.0.0	10/22/2002	QLogic

oem0.inf Not Available
PCIIVEN_1077&DEV_2312&SUBSYS_010C1077&REV_0213&1070020&0&10
Qlogic processor device Yes SYSTEM 5.2.3718.0
10/1/2002 QLOGIC scsivdev.inf Not Available
SCSIINPROCESSOR&VEN_QLOGIC&PROD_PSEUDO_DEVICE&REV_14&37D8710D&0&07F0
PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
ACPIPNP0A0313
Adaptec SCSI Card 39160 - Ultra160 SCSI Yes
SCSIADAPTER 5.2.3718.0 10/1/2002 Adaptec
pnpscsi.inf Not Available
PCIIVEN_9005&DEV_00C0&SUBSYS_F6209005&REV_0113&29E81982&0&10
Adaptec SCSI Card 39160 - Ultra160 SCSI Yes
SCSIADAPTER 5.2.3718.0 10/1/2002 Adaptec
pnpscsi.inf Not Available
PCIIVEN_9005&DEV_00C0&SUBSYS_F6209005&REV_0113&29E81982&0&11
Qlogic processor device Yes SYSTEM 5.2.3718.0
10/1/2002 QLOGIC scsivdev.inf Not Available
SCSIINPROCESSOR&VEN_QLOGIC&PROD_GEM359&REV_1.0614&1AF8FFB&0&040
Qlogic processor device Yes SYSTEM 5.2.3718.0
10/1/2002 QLOGIC scsivdev.inf Not Available
SCSIINPROCESSOR&VEN_QLOGIC&PROD_GEM359&REV_1.0614&1AF8FFB&0&050
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_SEAGATE&PROD_ST318203LC&REV_000214&1AF8FFB&0&0B0
PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
ACPIPNP0A0314
System Interrupt Controller Not Available Not Available
Available Not Available Not Available Not Available
Available Not Available Not Available Not Available
PCIIVEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_0013&172E68DD&0&08
QLogic QLA23xx PCI Fibre Channel Adapter No
SCSIADAPTER 8.2.0.0 10/22/2002 QLogic
oem0.inf Not Available
PCIIVEN_1077&DEV_2312&SUBSYS_01001077&REV_0213&172E68DD&0&10
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&7C3A82C&0&000
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&7C3A82C&0&001
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&7C3A82C&0&002
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&7C3A82C&0&003
Qlogic processor device Yes SYSTEM 5.2.3718.0

10/1/2002 QLOGIC scsivdev.inf Not Available
SCSIINPROCESSOR&VEN_QLOGIC&PROD_PSEUDO_DEVICE&REV_14&7C3A82C&0&07F0
PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
ACPIPNP0A0315
QLogic QLA23xx PCI Fibre Channel Adapter No
SCSIADAPTER 8.2.0.0 10/22/2002 QLogic
oem0.inf Not Available
PCIIVEN_1077&DEV_2312&SUBSYS_010C1077&REV_0213&474B838&0&10
Qlogic processor device Yes SYSTEM 5.2.3718.0
10/1/2002 QLOGIC scsivdev.inf Not Available
SCSIINPROCESSOR&VEN_QLOGIC&PROD_PSEUDO_DEVICE&REV_14&2091DFBB&0&07F0
PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
ACPIPNP0A0316
System Interrupt Controller Not Available
UNKNOWN Not Available Not Available
Available Not Available Not Available Not Available
Available
PCIIVEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_0013&E44F86D&0&08
PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
ACPIPNP0A0317
Intel(R) PRO/1000 F Server Adapter Yes NET
6.3.6.3 10/1/2002 Intel nete1000.inf
Not Available
PCIIVEN_8086&DEV_1001&SUBSYS_10038086&REV_0213&20FEA912&0&10
PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
ACPIPNP0A0318
System Interrupt Controller Not Available Not Available
Available Not Available Not Available Not Available
Available Not Available Not Available Not Available
PCIIVEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_0013&33B859B7&0&08
PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
ACPIPNP0A0319
QLogic QLA23xx PCI Fibre Channel Adapter No
SCSIADAPTER 8.2.0.0 10/22/2002 QLogic
oem0.inf Not Available
PCIIVEN_1077&DEV_2312&SUBSYS_01001077&REV_0213&AD74055&0&10
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&348718C2&0&000
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&348718C2&0&001
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&348718C2&0&002
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&348718C2&0&003
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available

SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&348718C2&0&003
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&348718C2&0&010
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&348718C2&0&011
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&348718C2&0&012
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&348718C2&0&013
Qlogic processor device Yes SYSTEM 5.2.3718.0
10/1/2002 QLOGIC scsivdev.inf Not Available
SCSIINPROCESSOR&VEN_QLOGIC&PROD_PSEUDO_DEVICE&REV_14&348718C2&0&07F0
PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
ACPIPNP0A031A
System Interrupt Controller Not Available Not Available
Available Not Available Not Available Not Available
Available Not Available Not Available Not Available
PCIIVEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_0013&23C0707C&0&08
QLogic QLA23xx PCI Fibre Channel Adapter No
SCSIADAPTER 8.2.0.0 10/22/2002 QLogic
oem0.inf Not Available
PCIIVEN_1077&DEV_2312&SUBSYS_01001077&REV_0213&23C0707C&0&10
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&B5C9978&0&000
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&B5C9978&0&001
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&B5C9978&0&002
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&B5C9978&0&003
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&B5C9978&0&010
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_220014&B5C9978&0&011
Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002
(Standard disk drives) disk.inf Not Available
SCSIDI&VEN_NEC&PROD_ISTORAGE_2000&REV_

(Standard disk drives) disk.inf Not Available
 SCSI\DISK&VEN_NEC&PROD_STORAGE_2000&REV_2200\4&731EE2F&0&013
 Qlogic processor device Yes SYSTEM 5.2.3718.0 10/1/2002 QLOGIC scsidev.inf Not Available
 SC\SI\PROCESSOR&VEN_QLOGIC&PROD_PSEUDO_DEVICE&REV_14&731EE2F&0&07F0
 PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP\0A03\1B
 PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP\0A03\1C
 System Interrupt Controller Not Available Not Available
 Available Not Available Not Available Not Available
 Available Not Available Not Available Not Available
 PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&32C5B1AC&0&08
 QLogic QLA23xx PCI Fibre Channel Adapter No
 SCSI\ADAPTER 8.2.0.0 10/22/2002 QLogic
 oem0.inf Not Available
 PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&32C5B1AC&0&10
 Qlogic processor device Yes SYSTEM 5.2.3718.0 10/1/2002 QLOGIC scsidev.inf Not Available
 SC\SI\PROCESSOR&VEN_QLOGIC&PROD_PSEUDO_DEVICE&REV_14&380107DF&0&07F0
 PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP\0A03\1D
 QLogic QLA23xx PCI Fibre Channel Adapter No
 SCSI\ADAPTER 8.2.0.0 10/22/2002 QLogic
 oem0.inf Not Available
 PCI\VEN_1077&DEV_2312&SUBSYS_01001077&REV_02\3&7B03F9A&0&10
 Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002 (Standard disk drives) disk.inf Not Available
 SCSI\DISK&VEN_NEC&PROD_STORAGE_2000&REV_2200\4&37249EF2&0&000
 Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002 (Standard disk drives) disk.inf Not Available
 SCSI\DISK&VEN_NEC&PROD_STORAGE_2000&REV_2200\4&37249EF2&0&001
 Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002 (Standard disk drives) disk.inf Not Available
 SCSI\DISK&VEN_NEC&PROD_STORAGE_2000&REV_2200\4&37249EF2&0&002
 Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002 (Standard disk drives) disk.inf Not Available
 SCSI\DISK&VEN_NEC&PROD_STORAGE_2000&REV_2200\4&37249EF2&0&003
 Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002 (Standard disk drives) disk.inf Not Available
 SCSI\DISK&VEN_NEC&PROD_STORAGE_2000&REV_2200\4&37249EF2&0&010
 Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002 (Standard disk drives) disk.inf Not Available
 SCSI\DISK&VEN_NEC&PROD_STORAGE_2000&REV_2200\4&37249EF2&0&011
 Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002 (Standard disk drives) disk.inf Not Available
 SCSI\DISK&VEN_NEC&PROD_STORAGE_2000&REV_

2200\4&37249EF2&0&012
 Disk drive Yes DISKDRIVE 5.2.3718.0 10/1/2002 (Standard disk drives) disk.inf Not Available
 SCSI\DISK&VEN_NEC&PROD_STORAGE_2000&REV_2200\4&37249EF2&0&013
 Qlogic processor device Yes SYSTEM 5.2.3718.0 10/1/2002 QLOGIC scsidev.inf Not Available
 SC\SI\PROCESSOR&VEN_QLOGIC&PROD_PSEUDO_DEVICE&REV_14&37249EF2&0&07F0
 PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP\0A03\1E
 System Interrupt Controller Not Available Not Available
 Available Not Available Not Available Not Available
 Available Not Available Not Available Not Available
 PCI\VEN_1033&DEV_00FE&SUBSYS_00FE1033&REV_00\3&309158FC&0&08
 PCI bus Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\PNP\0A03\1F
 QLogic QLA23xx PCI Fibre Channel Adapter No
 SCSI\ADAPTER 8.2.0.0 10/22/2002 QLogic
 oem0.inf Not Available
 PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\3&1DD7A857&0&10
 Qlogic processor device Yes SYSTEM 5.2.3718.0 10/1/2002 QLOGIC scsidev.inf Not Available
 SC\SI\PROCESSOR&VEN_QLOGIC&PROD_PSEUDO_DEVICE&REV_14&178F0609&0&07F0
 ACPI Thermal Zone Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\THERMALZONE\PROC
 ACPI Thermal Zone Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\THERMALZONE\CELL
 ACPI Thermal Zone Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\THERMALZONE\XBC
 ACPI Thermal Zone Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\THERMALZONE\PCXA
 ACPI Fixed Feature Button Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ACPI\FIXEDBUTTON\2&DABA3FF&0
 Logical Disk Manager Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ROOT\DMIO\0000
 Volume Manager Yes SYSTEM 5.2.3718.0 10/1/2002 (Standard system devices) machine.inf Not Available
 ROOT\FTDISK\0000
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&GPTPARTITION{DE4F2660-CB70-01C2-507B-9E5F8078F531}
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&GPTPARTITION{DE691700-CB70-01C2-F1B3-12714F758821}
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&GPTPARTITION{

E4A094E0-CB70-01C2-D931-F8428177D974}
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F35F4OFFSET7E00LENGTH320052FC00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F35F4OFFSET3200537A00LENGTH8344B7800
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F35F7OFFSET7E00LENGTH320052FC00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F35F7OFFSET3200537A00LENGTH8344B7800
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F35F1OFFSET7E00LENGTH320052FC00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F35F1OFFSET3200537A00LENGTH8344B7800
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F35F0OFFSET7E00LENGTH320052FC00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F35F0OFFSET3200537A00LENGTH8344B7800
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F5F70OFFSET7E00LENGTH500146800
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F5F70OFFSET50014E600LENGTH7805E1A00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F5F70OFFSETC80730000LENGTH7805E1A00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F5F70OFFSETC80730000LENGTH7805E1A00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F5F70OFFSET50014E600LENGTH7805E1A00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F5F4FOFFSET7E00LENGTH500146800
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F5F4FOFFSET50014E600LENGTH7805E1A00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002 Microsoft volume.inf Not Available
 STORAGE\VOLUME\1&30A96598&0&SIGNATUREE64F5F4FOFFSETC80730000LENGTH7805E1A00
 Generic volume Yes VOLUME 5.2.3718.0 10/1/2002


```

Microsoft volume.inf Not Available
STORAGEVOLUME1&30A96598&0&SIGNATURE171F
0A84OFFSETC8073000LENGTH7805E1A00
Generic volume Yes VOLUME 5.2.3718.0 10/1/2002
Microsoft volume.inf Not Available
STORAGEVOLUME1&30A96598&0&SIGNATURE171F
0A84OFFSET1400D11A00LENGTHH68BA22BA00
AFD Networking Support Environment Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOTLEGACY_AFD\0000
Beep Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_BEEP\0000
CRC Disk Filter Driver Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available Not
ROOTLEGACY_CRCDISK\0000
dmboot Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_DMBOOT\0000
dmload Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_DMLOAD\0000
Fips Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_FIPS\0000
Generic Packet Classifier Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOTLEGACY_GPC\0000
IPSEC driver Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available Not
ROOTLEGACY_IPSEC\0000
ksecdd Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_KSECD\0000
mountmgr Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available
ROOTLEGACY_MOUNTMGR\0000
NDIS System Driver Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available
ROOTLEGACY_NDIS\0000
Remote Access NDIS TAPI Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOTLEGACY_NDISTAPI\0000
NDIS Usermode I/O Protocol Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOTLEGACY_NDISUIO\0000
NDProxy Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_NDPROXY\0000
NetBios over Tcpip Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available Not
Available ROOTLEGACY_NETBT\0000
Null Not Available LEGACYDRIVER Not

```

```

Available Not Available Not Available Not
Available Not Available ROOTLEGACY_NULL\0000
Partition Manager Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available
ROOTLEGACY_PARTMGR\0000
qldirect Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_QLDIRECT\0000
qlvika Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_QLVIKA\0000
Remote Access Auto Connection Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOTLEGACY_RASACD\0000
RDPcdd Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_RDPcdd\0000
sacdrv Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_SACDRV\0000
TCP/IP Protocol Driver Not Available LEGACYDRIVER
Not Available Not Available Not
Available Not Available Not Available
ROOTLEGACY_TCPIP\0000
volsnap Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOTLEGACY_VOLSNAP\0000
Remote Access IP ARP Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOTLEGACY_WANARP\0000
Audio Codecs Yes MEDIA 5.2.3718.0 10/1/2002
(Standard system devices) wave.inf Not
Available ROOTMEDIAMS_MMCM
Legacy Audio Drivers Yes MEDIA 5.2.3718.0 10/1/2002
(Standard system devices) wave.inf Not
Available ROOTMEDIAMS_MMDRV
Media Control Devices Yes MEDIA 5.2.3718.0 10/1/2002
(Standard system devices) wave.inf Not
Available ROOTMEDIAMS_MMMCI
Legacy Video Capture Devices Yes MEDIA 5.2.3718.0
10/1/2002 (Standard system devices) wave.inf
Not Available ROOTMEDIAMS_MMVCD
Video Codecs Yes MEDIA 5.2.3718.0 10/1/2002
(Standard system devices) wave.inf Not
Available ROOTMEDIAMS_MMVID
WAN Miniport (L2TP) Yes NET 5.2.3718.0 10/1/2002
Microsoft netrasa.inf Not Available
ROOTMS_L2TPMINIPORT\0000
WAN Miniport (IP) Yes NET 5.2.3718.0 10/1/2002
Microsoft netrasa.inf Not Available
ROOTMS_NDISWANIP\0000
WAN Miniport (PPPOE) Yes NET 5.2.3718.0
10/1/2002 Microsoft netrasa.inf Not Available
ROOTMS_PPPOEMINIPORT\0000
WAN Miniport (PPTP) Yes NET 5.2.3718.0 10/1/2002
Microsoft netrasa.inf Not Available
ROOTMS_PPTPMINIPORT\0000
Direct Parallel Yes NET 5.2.3718.0 10/1/2002
Microsoft netrasa.inf Not Available

```

```

ROOTMS_PTMINIPORT\0000
Terminal Server Device Redirector Yes SYSTEM 5.2.3718.0
10/1/2002 (Standard system devices) machine.inf
Not Available ROOT\RDPDR\0000
Terminal Server Keyboard Driver Yes SYSTEM 5.2.3718.0
10/1/2002 (Standard system devices) machine.inf
Not Available ROOT\RDP_KBD\0000
Terminal Server Mouse Driver Yes SYSTEM 5.2.3718.0
10/1/2002 (Standard system devices) machine.inf
Not Available ROOT\RDP_MOU\0000
Plug and Play Software Device Enumerator Yes SYSTEM
5.2.3718.0 10/1/2002 (Standard system devices)
machine.inf Not Available
ROOT\SYSTEM\0000

```

[Environment Variables]

```

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe
<SYSTEM>
Path
%SystemRoot%\system32;%SystemRoot%;%SystemRo
ot%\System32\Wbem;C:\Program Files\Microsoft SQL
Server\80\Tools\Binn\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE IA64 <SYSTEM>
PROCESSOR_LEVEL 31 <SYSTEM>
PROCESSOR_IDENTIFIER ia64 Family 31 Model 0 Stepping
7, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0007 <SYSTEM>
NUMBER_OF_PROCESSORS 32 <SYSTEM>
ClusterLog C:\WINDOWS\Cluster\cluster.log <SYSTEM>
PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH
<SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
ASAMA\Administrator
TMP %USERPROFILE%\Local Settings\Temp
ASAMA\Administrator

```

[Print Jobs]

```

Document Size Owner Notify Status Time
Submitted Start Time Until Time Elapsed Time Pages
Printed Job ID Priority Parameters Driver
Print Processor Host Print Queue Data Type
Name

```

[Network Connections]

Local Name	Remote Name	Type	Status
User Name			

[Running Tasks]

Name	Path	Process ID	Priority	Min Working Set	Set
Max Working Set	Start Time	Version	Size		
File Date					
system idle process	Not Available	0	0	0	0
Available	Not Available	Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available	Not Available	Not Available
system	Not Available	4	8	0	0
	2826240	Not Available	Not Available	Not Available	Not Available
	Not Available	Not Available	Not Available	Not Available	Not Available
smss.exe	c:\windows\system32\smss.exe	444	11	5.2.3718.0	5.2.3718.0
(dnsrv.021114-1947)	2826240	2/18/2003 11:45 PM	128.50 KB (131,584 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
csrss.exe	Not Available	500	13	Not Available	Not Available
Available	Not Available	2/18/2003 11:51 PM	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available	Not Available	Not Available
winlogon.exe	c:\windows\system32\winlogon.exe	524	13	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/18/2003 11:51 PM	614.50 KB (629,248 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
services.exe	c:\windows\system32\services.exe	9	568	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/18/2003 11:51 PM	285.50 KB (292,352 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
lsass.exe	c:\windows\system32\lsass.exe	580	9	409600	2826240
(dnsrv.021114-1947)	2826240	2/18/2003 11:51 PM	15.00 KB (15,360 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
svchost.exe	c:\windows\system32\svchost.exe	8	780	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/18/2003 11:51 PM	32.00 KB (32,768 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
svchost.exe	c:\windows\system32\svchost.exe	8	820	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/18/2003 11:51 PM	32.00 KB (32,768 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
svchost.exe	Not Available	948	8	Not Available	2/18/2003
Available	Not Available	Not Available	Not Available	Not Available	Not Available
svchost.exe	Not Available	996	8	Not Available	2/18/2003
Available	Not Available	Not Available	Not Available	Not Available	Not Available
svchost.exe	c:\windows\system32\svchost.exe	8	1008	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/18/2003 11:51 PM	32.00 KB (32,768 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
spoolsv.exe	c:\windows\system32\spoolsv.exe	8	1176	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/18/2003 11:51 PM	154.00 KB (157,696 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
msdtc.exe	Not Available	1212	8	Not Available	Not Available
Available	Not Available	2/18/2003 11:51 PM	Not Available	Not Available	Not Available

Available	Not Available	Not Available	Not Available	Not Available	Not Available
svchost.exe	c:\windows\system32\svchost.exe	1700	8	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/18/2003 11:51 PM	32.00 KB (32,768 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
svchost.exe	Not Available	1880	8	Not Available	2/18/2003
Available	Not Available	Not Available	Not Available	Not Available	Not Available
mssearch.exe	c:\program files\common files\system\mssearch\bin\mssearch.exe	1944	8	409600	2826240
	9.107.8320.0	2/18/2003 11:51 PM	460.00 KB (471,040 bytes)	2/12/2003 3:08 PM	2/12/2003 3:08 PM
dfssvc.exe	c:\windows\system32\dfssvc.exe	392	8	409600	2826240
	(dnsrv.021114-1947)	2/18/2003 11:51 PM	430.00 KB (440,320 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
wmiprvse.exe	Not Available	896	8	Not Available	2/18/2003
Available	Not Available	Not Available	Not Available	Not Available	Not Available
explorer.exe	c:\windows\explorer.exe	2064	8	409600	2826240
	6.00.3718.0 (dnsrv.021114-1947)	2/18/2003 11:53 PM	1.62 MB (1,701,376 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
sqlmangr.exe	c:\program files\microsoft sql server\80\tools\bin\sqlmangr.exe	2148	8	409600	2826240
	225.00 KB (230,400 bytes)	2/18/2003 11:53 PM	2000.080.0760.00	2/7/2003 6:48 AM	2/7/2003 6:48 AM
cmd.exe	c:\windows\system32\cmd.exe	3532	8	409600	2826240
(dnsrv.021114-1947)	2826240	2/19/2003 12:12 AM	493.00 KB (504,832 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
taskmgr.exe	c:\windows\system32\taskmgr.exe	3672	13	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/19/2003 12:23 AM	311.50 KB (318,976 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
cmd.exe	c:\windows\system32\cmd.exe	3872	8	409600	2826240
(dnsrv.021114-1947)	2826240	2/19/2003 1:20 AM	493.00 KB (504,832 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
mmc.exe	c:\windows\system32\mmc.exe	3544	8	409600	2826240
(dnsrv.021114-1947)	2826240	2/19/2003 3:31 AM	2.48 MB (2,598,400 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
vds.exe	c:\windows\system32\vds.exe	2784	8	409600	2826240
(dnsrv.021114-1947)	535.00 KB (547,840 bytes)	2/19/2003 3:31 AM	5.2.3718.0	11/18/2002 9:00 PM	11/18/2002 9:00 PM
dmadmin.exe	c:\windows\system32\dmadmin.exe	2776	8	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/19/2003 3:31 AM	641.00 KB (656,384 bytes)	11/18/2002 9:00 PM	11/18/2002 9:00 PM
helpctr.exe	c:\windows\pchealth\helpctr\binaries\helpctr.exe	3848	8	409600	2826240
	5.2.3718.0 (dnsrv.021114-1947)	2/19/2003 3:31 AM	1.97 MB (2,067,456 bytes)	2/3/2003 11:09 AM	2/3/2003 11:09 AM
wmiprvse.exe	Not Available	3480	8	Not Available	2/19/2003
Available	Not Available	Not Available	Not Available	Not Available	Not Available

helpsvc.exe	Path	Version	Size	File Date	Manufacturer
	c:\windows\pchealth\helpctr\binaries\helpsvc.exe	3440	8	409600	2826240
3:31 AM	5.2.3718.0 (dnsrv.021114-1947)	2/19/2003	2.18 MB (2,288,640 bytes)	2/3/2003 11:09 AM	2/3/2003 11:09 AM

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer
smss	5.2.3718.0 (dnsrv.021114-1947)	128.50 KB (131,584 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
ntdll	5.2.3718.0 (dnsrv.021114-1947)	1.45 MB (1,523,712 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
winlogon	5.2.3718.0 (dnsrv.021114-1947)	614.50 KB (629,248 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
kernel32	5.2.3718.0 (dnsrv.021114-1947)	1.76 MB (1,848,320 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
msvcrt	7.0.3718.0 (dnsrv.021114-1947)	873.50 KB (894,464 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
advapi32	5.2.3718.0 (dnsrv.021114-1947)	1.30 MB (1,358,336 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
rpcrt4	5.2.3718.0 (dnsrv.021114-1947)	2.01 MB (2,112,000 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
user32	5.2.3718.0 (dnsrv.021114-1947)	1.31 MB (1,372,672 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
gdi32	5.2.3718.0 (dnsrv.021114-1947)	783.50 KB (802,304 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
userenv	5.2.3718.0 (dnsrv.021114-1947)	1.46 MB (1,535,488 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
nddeapi	5.2.3718.0 (dnsrv.021114-1947)	39.50 KB (40,448 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
crypt32	5.131.3718.0 (dnsrv.021114-1947)	1.50 MB (1,574,400 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
msasn1	5.2.3718.0 (dnsrv.021114-1947)	153.50 KB (157,184 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
secur32	5.2.3718.0 (dnsrv.021114-1947)	166.00 KB (169,984 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
winsta	5.2.3718.0 (dnsrv.021114-1947)	138.50 KB (141,824 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
netapi32	5.2.3718.0 (dnsrv.021114-1947)	832.00 KB (851,968 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
profmap	5.2.3718.0 (dnsrv.021114-1947)	55.50 KB (56,832 bytes)	11/18/2002 9:00 PM	Microsoft Corporation
regapi	5.2.3718.0 (dnsrv.021114-1947)	124.00 KB (126,976 bytes)	11/18/2002 9:00 PM	Microsoft Corporation

bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\regapi.dll
ws2_32 5.2.3718.0 (dnsvr.021114-1947) 228.50 KB (233,984
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\ws2_32.dll
ws2help 5.2.3718.0 (dnsvr.021114-1947) 49.50 KB (50,688
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\ws2help.dll
msgina 5.2.3718.0 (dnsvr.021114-1947) 1.91 MB (2,007,040
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\msgina.dll
shsvcs 6.00.3718.0 (dnsvr.021114-1947) 321.50 KB (329,216
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\shsvcs.dll
shlwapi 6.00.3718.0 (dnsvr.021114-1947) 720.00 KB (737,280
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\shlwapi.dll
sfc 5.2.3718.0 (dnsvr.021114-1947) 7.50 KB (7,680 bytes)
11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\sfc.dll
sfc_os 5.2.3718.0 (dnsvr.021114-1947) 257.00 KB (263,168
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\sfc_os.dll
wintrust 5.131.3718.0 (dnsvr.021114-1947) 452.00 KB
(462,848 bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\wintrust.dll
ole32 5.2.3718.0 (dnsvr.021114-1947) 3.38 MB (3,547,648
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\ole32.dll
imagehlp 5.2.3718.0 (dnsvr.021114-1947) 128.00 KB (131,072
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\imagehlp.dll
comctl32 6.0 (dnsvr.021114-1947) 2.18 MB (2,285,056
bytes) 2/3/2003 7:51 PM Microsoft Corporation
c:\windows\winsxs\ia64_microsoft.windows.common-
controls_6595b64144ccf1df_6.0.100.0_x-ww_b3722bab\comctl32.dll
wincard 5.2.3718.0 (dnsvr.021114-1947) 291.50 KB (298,496
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\wincard.dll
wtsapi32 5.2.3718.0 (dnsvr.021114-1947) 47.00 KB (48,128
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\wtsapi32.dll
version 5.2.3718.0 (dnsvr.021114-1947) 44.00 KB (45,056
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\version.dll
sxs 5.2.3718.0 (dnsvr.021114-1947) 1.77 MB (1,860,096
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\sxs.dll
winmm 5.2.3718.0 (dnsvr.021114-1947) 404.00 KB (413,696
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\winmm.dll
shell32 6.00.3718.0 (dnsvr.021114-1947) 12.35 MB (12,951,040
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\shell32.dll
setupapi 5.2.3718.0 (dnsvr.021114-1947) 1.90 MB (1,990,656
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\setupapi.dll
wldap32 5.2.3718.0 (dnsvr.021114-1947) 402.00 KB (411,648
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\wldap32.dll
csdcll 5.2.3718.0 (dnsvr.021114-1947) 210.50 KB (215,552
bytes) 11/18/2002 9:00 PM Microsoft Corporation

c:\windows\system32\csdcll.dll
wlnotify 5.2.3718.0 (dnsvr.021114-1947) 218.00 KB (223,232
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\wlnotify.dll
winspool 5.2.3718.0 (dnsvr.021114-1947) 399.00 KB (408,576
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\winspool.drv
mpr 5.2.3718.0 (dnsvr.021114-1947) 163.00 KB (166,912
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\mpr.dll
comctl32 5.82 (dnsvr.021114-1947) 1.55 MB (1,621,504
bytes) 2/3/2003 7:51 PM Microsoft Corporation
c:\windows\winsxs\ia64_microsoft.windows.common-
controls_6595b64144ccf1df_5.82.0.0_x-ww_b9c4a0a5\comctl32.dll
uxtheme 6.00.3718.0 (dnsvr.021114-1947) 527.50 KB (540,160
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\uxtheme.dll
samlib 5.2.3718.0 (dnsvr.021114-1947) 106.00 KB (108,544
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\samlib.dll
cscui 5.2.3718.0 (dnsvr.021114-1947) 574.00 KB (587,776
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\cscui.dll
oleaut32 5.2.3718.0 3.56 MB (3,730,432 bytes) 11/18/2002
9:00 PM Microsoft Corporation c:\windows\system32\oleaut32.dll
clbcatq 2001.12.4648.0 (dnsvr.021114-1947) 1.23 MB
(1,293,312 bytes) 2/3/2003 11:06 AM Microsoft Corporation
c:\windows\system32\clbcatq.dll
comres 2001.12.4648.0 (dnsvr.021114-1947) 779.50 KB
(798,208 bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\comres.dll
ntmarta 5.2.3718.0 (dnsvr.021114-1947) 343.50 KB (351,744
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\ntmarta.dll
wbemprox 5.2.3718.0 (dnsvr.021114-1947) 46.00 KB (47,104
bytes) 2/3/2003 11:05 AM Microsoft Corporation
c:\windows\system32\wbem\wbemprox.dll
wbemcomn 5.2.3718.0 (dnsvr.021114-1947) 596.00 KB (610,304
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\wbem\wbemcomn.dll
wbemsvc 5.2.3718.0 (dnsvr.021114-1947) 62.50 KB (64,000
bytes) 2/3/2003 11:05 AM Microsoft Corporation
c:\windows\system32\wbem\wbemsvc.dll
fastprox 5.2.3718.0 (dnsvr.021114-1947) 1.50 MB (1,573,888
bytes) 2/3/2003 11:05 AM Microsoft Corporation
c:\windows\system32\wbem\fastprox.dll
msvcpx60 6.10.2240.8 941.50 KB (964,096 bytes)
11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\msvcpx60.dll
ntdsapi 5.2.3718.0 (dnsvr.021114-1947) 182.50 KB (186,880
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\ntdsapi.dll
dnsapi 5.2.3718.0 (dnsvr.021114-1947) 402.00 KB (411,648
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\dnsapi.dll
services 5.2.3718.0 (dnsvr.021114-1947) 285.50 KB (292,352
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\services.exe
scserv 5.2.3718.0 (dnsvr.021114-1947) 762.50 KB (780,800
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\scserv.dll
authz 5.2.3718.0 (dnsvr.021114-1947) 201.50 KB (206,336

bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\authz.dll
umpnpgmr 5.2.3718.0 (dnsvr.021114-1947) 317.00 KB (324,608
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\umpnpgmr.dll
ncobjapi 5.2.3718.0 (dnsvr.021114-1947) 118.50 KB (121,344
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\ncobjapi.dll
eventlog 5.2.3718.0 (dnsvr.021114-1947) 155.50 KB (159,232
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\eventlog.dll
psapi 5.2.3718.0 (dnsvr.021114-1947) 48.00 KB (49,152
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\psapi.dll
lsass 5.2.3718.0 (dnsvr.021114-1947) 15.00 KB (15,360
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\lsass.exe
lsasrv 5.2.3718.0 (dnsvr.021114-1947) 1.94 MB (2,031,104
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\lsasrv.dll
samsrv 5.2.3718.0 (dnsvr.021114-1947) 1,016.00 KB
(1,040,384 bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\samsrv.dll
cryptdll 5.2.3718.0 (dnsvr.021114-1947) 58.50 KB (59,904
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\cryptdll.dll
msprivs 5.2.3718.0 (dnsvr.021114-1947) 45.00 KB (46,080
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\msprivs.dll
kerberos 5.2.3718.0 (dnsvr.021114-1947) 874.50 KB (895,488
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\kerberos.dll
msv1_0 5.2.3718.0 (dnsvr.021114-1947) 329.50 KB (337,408
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\msv1_0.dll
netlogon 5.2.3718.0 (dnsvr.021114-1947) 935.50 KB (957,952
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\netlogon.dll
w32time 5.2.3718.0 (dnsvr.021114-1947) 540.50 KB (553,472
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\w32time.dll
iphlpapi 5.2.3718.0 (dnsvr.021114-1947) 223.00 KB (228,352
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\iphlpapi.dll
schannel 5.2.3718.0 (dnsvr.021114-1947) 468.50 KB (479,744
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\schannel.dll
wdigest 5.2.3718.0 (dnsvr.021114-1947) 161.50 KB (165,376
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\wdigest.dll
rsaenh 5.2.3718.0 (dnsvr.021114-1947) 372.07 KB (381,000
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\rsaenh.dll
rassfm 5.2.3718.0 (dnsvr.021114-1947) 56.00 KB (57,344
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\rassfm.dll
kdcsvc 5.2.3718.0 (dnsvr.021114-1947) 570.00 KB (583,680
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\kdcsvc.dll
ntdsa 5.2.3718.0 (dnsvr.021114-1947) 3.69 MB (3,869,696
bytes) 11/18/2002 9:00 PM Microsoft Corporation
c:\windows\system32\ntdsa.dll

ntdsatq 5.2.3718.0 (dnsvr.021114-1947) 79.50 KB (81,408 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\ntdsatq.dll

mswsock 5.2.3718.0 (dnsvr.021114-1947) 670.00 KB (686,080 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\mswsock.dll

esent 5.2.3718.0 (dnsvr.021114-1947) 2.48 MB (2,598,912 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\esent.dll

scecli 5.2.3718.0 (dnsvr.021114-1947) 468.00 KB (479,232 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\scecli.dll

wshtcpip 5.2.3718.0 (dnsvr.021114-1947) 38.00 KB (38,912 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\wshtcpip.dll

ipsecsvc 5.2.3718.0 (dnsvr.021114-1947) 410.50 KB (420,352 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\ipsecsvc.dll

oakley 5.2.3718.0 (dnsvr.021114-1947) 493.50 KB (505,344 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\oakley.dll

winiipsec 5.2.3718.0 (dnsvr.021114-1947) 78.50 KB (80,384 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\winiipsec.dll

pstorsvc 5.2.3718.0 (dnsvr.021114-1947) 57.50 KB (58,880 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\pstorsvc.dll

psbase 5.2.3718.0 (dnsvr.021114-1947) 172.00 KB (176,128 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\psbase.dll

dssenh 5.2.3718.0 (dnsvr.021114-1947) 319.07 KB (326,728 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\dssenh.dll

wlbcstrl 5.2.3718.0 (dnsvr.021114-1947) 194.50 KB (199,168 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\wlbcstrl.dll

svchost 5.2.3718.0 (dnsvr.021114-1947) 32.00 KB (32,768 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\svchost.exe

rpcss 5.2.3718.0 (dnsvr.021114-1947) 645.00 KB (660,480 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\rpcss.dll

termsrv 5.2.3718.0 (dnsvr.021114-1947) 603.00 KB (617,472 bytes) 2/3/2003 11:06 AM Microsoft Corporation c:\windows\system32\termsrv.dll

icaapi 5.2.3718.0 (dnsvr.021114-1947) 26.50 KB (27,136 bytes) 2/3/2003 11:06 AM Microsoft Corporation c:\windows\system32\icaapi.dll

mstlsapi 5.2.3718.0 (dnsvr.021114-1947) 311.00 KB (318,464 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\mstlsapi.dll

activeds 5.2.3718.0 (dnsvr.021114-1947) 544.50 KB (557,568 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\activeds.dll

adslidpc 5.2.3718.0 (dnsvr.021114-1947) 312.00 KB (319,488 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\adslidpc.dll

credui 5.2.3718.0 (dnsvr.021114-1947) 288.00 KB (294,912 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\credui.dll

atl 3.00.2282 348.00 KB (356,352 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\atl.dll

wzcsvc 5.2.3718.0 (dnsvr.021114-1947) 608.50 KB (623,104 bytes) 11/15/2002 11:37 PM Microsoft Corporation c:\windows\system32\wzcsvc.dll

rtutils 5.2.3718.0 (dnsvr.021114-1947) 81.50 KB (83,456 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\rtutils.dll

wmi 5.2.3718.0 (dnsvr.021114-1947) 5.00 KB (5,120 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\wmi.dll

dhcpcsvc 5.2.3718.0 (dnsvr.021114-1947) 279.00 KB (285,696 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\dhcpcsvc.dll

rastls 5.2.3718.0 (dnsvr.021114-1947) 346.00 KB (354,304 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\rastls.dll

cryptui 5.131.3718.0 (dnsvr.021114-1947) 1.04 MB (1,094,656 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\cryptui.dll

mprapi 5.2.3718.0 (dnsvr.021114-1947) 237.50 KB (243,200 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\mprapi.dll

rasapi32 5.2.3718.0 (dnsvr.021114-1947) 585.00 KB (599,040 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\rasapi32.dll

rasman 5.2.3718.0 (dnsvr.021114-1947) 154.50 KB (158,208 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\rasman.dll

tapi32 5.2.3718.0 (dnsvr.021114-1947) 493.00 KB (504,832 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\tapi32.dll

raschap 5.2.3718.0 (dnsvr.021114-1947) 200.00 KB (204,800 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\raschap.dll

schedsvc 5.2.3718.0 (dnsvr.021114-1947) 519.50 KB (531,968 bytes) 2/3/2003 11:08 AM Microsoft Corporation c:\windows\system32\schedsvc.dll

msidle 6.00.3718.0 (dnsvr.021114-1947) 8.50 KB (8,704 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\msidle.dll

wkssvc 5.2.3718.0 (dnsvr.021114-1947) 304.00 KB (311,296 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\wkssvc.dll

wiarpc 5.2.3718.0 (dnsvr.021114-1947) 68.00 KB (69,632 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\wiarpc.dll

cryptsvc 5.2.3718.0 (dnsvr.021114-1947) 126.00 KB (129,024 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\cryptsvc.dll

certcli 5.2.3718.0 (dnsvr.021114-1947) 586.00 KB (600,064 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\certcli.dll

vssapi 5.2.3718.0 (dnsvr.021114-1947) 1.28 MB (1,337,344 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\vssapi.dll

dmserver 5.2.3718.0 (dnsvr.021114-1947) 45.00 KB (46,080 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\dmserver.dll

es 2001.12.4648.0 (dnsvr.021114-1947) 637.50 KB (652,800 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\es.dll

pchsvc 5.2.3718.0 (dnsvr.021114-1947) 94.50 KB (96,768 bytes) 2/3/2003 11:09 AM Microsoft Corporation

c:\windows\pchealth\helpctr\binaries\pchsvc.dll

srvsvc 5.2.3718.0 (dnsvr.021114-1947) 187.50 KB (192,000 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\srvsvc.dll

comsvcs 2001.12.4648.0 (dnsvr.021114-1947) 2.96 MB (3,104,256 bytes) 2/3/2003 11:06 AM Microsoft Corporation c:\windows\system32\comsvcs.dll

seclogon 5.2.3718.0 (dnsvr.021114-1947) 41.50 KB (42,496 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\seclogon.dll

sens 5.2.3718.0 (dnsvr.021114-1947) 90.50 KB (92,672 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\sens.dll

trkwns 5.2.3718.0 (dnsvr.021114-1947) 245.50 KB (251,392 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\trkwns.dll

wmisvc 5.2.3718.0 (dnsvr.021114-1947) 408.00 KB (417,792 bytes) 2/3/2003 11:05 AM Microsoft Corporation c:\windows\system32\wbem\wmisvc.dll

wuauerv 5.4.3718.0 (dnsvr.021114-1947) 17.00 KB (17,408 bytes) 2/3/2003 11:06 AM Microsoft Corporation c:\windows\system32\wuauerv.dll

wuaueng 5.4.3718.0 (dnsvr.021114-1947) 495.50 KB (507,392 bytes) 2/3/2003 11:06 AM Microsoft Corporation c:\windows\system32\wuaueng.dll

advpack 6.00.3718.0 (dnsvr.021114-1947) 240.00 KB (245,760 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\advpack.dll

wininet 6.00.3718.0 (dnsvr.021114-1947) 1.42 MB (1,492,480 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\wininet.dll

browser 5.2.3718.0 (dnsvr.021114-1947) 187.00 KB (191,488 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\browser.dll

netrap 5.2.3718.0 (dnsvr.021114-1947) 30.00 KB (30,720 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\netrap.dll

winhttp 5.2.3718.0 (dnsvr.021114-1947) 876.50 KB (897,536 bytes) 2/3/2003 7:51 PM Microsoft Corporation c:\windows\winsxs\ia64_microsoft.windows.winhttp_6595b64144ccf1df_5.1.0.0_x-ww_0fbffd6\winhttp.dll

wbemcore 5.2.3718.0 (dnsvr.021114-1947) 1.63 MB (1,708,544 bytes) 2/3/2003 11:05 AM Microsoft Corporation c:\windows\system32\wbem\wbemcore.dll

esscli 5.2.3718.0 (dnsvr.021114-1947) 911.00 KB (932,864 bytes) 2/3/2003 11:05 AM Microsoft Corporation c:\windows\system32\wbem\esscli.dll

wmiutils 5.2.3718.0 (dnsvr.021114-1947) 284.50 KB (291,328 bytes) 2/3/2003 11:05 AM Microsoft Corporation c:\windows\system32\wbem\wmiutils.dll

repdrvfs 5.2.3718.0 (dnsvr.021114-1947) 598.50 KB (612,864 bytes) 2/3/2003 11:05 AM Microsoft Corporation c:\windows\system32\wbem\repdrvfs.dll

wmiprivsd 5.2.3718.0 (dnsvr.021114-1947) 1.38 MB (1,442,816 bytes) 2/3/2003 11:05 AM Microsoft Corporation c:\windows\system32\wbem\wmiprivsd.dll

wbemess 5.2.3718.0 (dnsvr.021114-1947) 972.00 KB (995,328 bytes) 2/3/2003 11:05 AM Microsoft Corporation c:\windows\system32\wbem\wbemess.dll

ncprov 5.2.3718.0 (dnsvr.021114-1947) 133.50 KB (136,704 bytes) 2/3/2003 11:05 AM Microsoft Corporation c:\windows\system32\wbem\ncprov.dll

netman 5.2.3718.0 (dnsv.021114-1947) 590.00 KB (604,160 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\netman.dll

wzcsapi 5.2.3718.0 (dnsv.021114-1947) 49.00 KB (50,176 bytes) 11/15/2002 11:37 PM Microsoft Corporation c:\windows\system32\wzcsapi.dll

netshell 5.2.3718.0 (dnsv.021114-1947) 2.65 MB (2,779,136 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\netshell.dll

clusapi 5.2.3718.0 (dnsv.021114-1947) 165.00 KB (168,960 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\clusapi.dll

hnetcfg 5.2.3718.0 (dnsv.021114-1947) 764.00 KB (782,336 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\hnetcfg.dll

rasdlg 5.2.3718.0 (dnsv.021114-1947) 1.35 MB (1,417,216 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\rasdlg.dll

rasadhlp 5.2.3718.0 (dnsv.021114-1947) 13.00 KB (13,312 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\rasadhlp.dll

netcfgx 5.2.3718.0 (dnsv.021114-1947) 1.94 MB (2,033,664 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\netcfgx.dll

wbemcons 5.2.3718.0 (dnsv.021114-1947) 237.00 KB (242,688 bytes) 2/3/2003 11:05 AM Microsoft Corporation c:\windows\system32\wbem\wbemcons.dll

spoolsv 5.2.3718.0 (dnsv.021114-1947) 154.00 KB (157,696 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\spoolsv.exe

spoolss 5.2.3718.0 (dnsv.021114-1947) 227.50 KB (232,960 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\spoolss.dll

localspl 5.2.3718.0 (dnsv.021114-1947) 835.50 KB (855,552 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\localspl.dll

cnbjmon 5.2.3680.0 (Lab03_dev(skatar).020509-1043)99.50 KB (101,888 bytes) 11/15/2002 11:36 PM Microsoft Corporation c:\windows\system32\cnbjmon.dll

pjlmon 5.2.3718.0 (dnsv.021114-1947) 37.50 KB (38,400 bytes) 11/15/2002 11:36 PM Microsoft Corporation c:\windows\system32\pjlmon.dll

tcpmon 5.2.3718.0 (dnsv.021114-1947) 132.50 KB (135,680 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\tcpmon.dll

mgmtapi 5.2.3718.0 (dnsv.021114-1947) 40.50 KB (41,472 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\mgmtapi.dll

snmpapi 5.2.3718.0 (dnsv.021114-1947) 52.00 KB (53,248 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\snmpapi.dll

wsnmp32 5.2.3718.0 (dnsv.021114-1947) 111.50 KB (114,176 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\wsnmp32.dll

usbmon 5.2.3718.0 (dnsv.021114-1947) 43.50 KB (44,544 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\usbmon.dll

winmr 5.2.3718.0 (dnsv.021114-1947) 38.00 KB (38,912 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\winmr.dll

wshqos 5.2.3718.0 (dnsv.021114-1947) 65.50 KB (67,072 bytes) 11/18/2002 9:00 PM Microsoft Corporation

c:\windows\system32\wshqos.dll

win32spl 5.2.3718.0 (dnsv.021114-1947) 268.50 KB (274,944 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\win32spl.dll

inetpp 5.2.3718.0 (dnsv.021114-1947) 212.00 KB (217,088 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\inetpp.dll

icmp 5.2.3718.0 (dnsv.021114-1947) 2.50 KB (2,560 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\icmp.dll

ersvc 5.2.3718.0 (dnsv.021114-1947) 61.00 KB (62,464 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\ersvc.dll

mssearch 9.107.8320.0 460.00 KB (471,040 bytes) 2/12/2003 3:08 PM Microsoft Corporation c:\program files\common files\system\mssearch\bin\mssearch.exe

mssws 9.107.8320.0 27.00 KB (27,648 bytes) 2/12/2003 3:07 PM Microsoft Corporation c:\program files\common files\system\mssearch\bin\mssws.dll

mssrch 9.107.8320.0 6.50 MB (6,819,328 bytes) 2/12/2003 3:07 PM Microsoft Corporation c:\progra~1\common~1\system\mssearch\bin\mssrch.dll

security 5.2.3718.0 (dnsv.021114-1947) 6.50 KB (6,656 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\security.dll

tquery 9.107.8320.0 5.85 MB (6,133,248 bytes) 2/12/2003 3:07 PM Microsoft Corporation c:\program files\system\mssearch\bin\tquery.dll

propdefs 9.107.8320.0 888.50 KB (909,824 bytes) 2/12/2003 3:07 PM Microsoft Corporation c:\progra~1\common~1\system\mssearch\bin\propdefs.dll

srchidx 9.107.8320.0 2.26 MB (2,374,144 bytes) 2/12/2003 3:07 PM Microsoft Corporation c:\progra~1\common~1\system\mssearch\bin\srchidx.dll

iprop 5.2.3718.0 (dnsv.021114-1947) 3.00 KB (3,072 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\iprop.dll

dfssvc 5.2.3718.0 (dnsv.021114-1947) 430.00 KB (440,320 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\dfssvc.exe

resutils 5.2.3718.0 (dnsv.021114-1947) 147.50 KB (151,040 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\resutils.dll

mfc42u 6.00.2282.0 3.34 MB (3,506,176 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\mfc42u.dll

wsock32 5.2.3718.0 (dnsv.021114-1947) 23.00 KB (23,552 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\wsock32.dll

explorer 6.00.3718.0 (dnsv.021114-1947) 1.62 MB (1,701,376 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\explorer.exe

browseui 6.00.3718.0 (dnsv.021114-1947) 2.42 MB (2,536,960 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\browseui.dll

shdocvw 6.00.3718.0 (dnsv.021114-1947) 3.19 MB (3,348,992 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\shdocvw.dll

apphelp 5.2.3718.0 (dnsv.021114-1947) 262.50 KB (268,800 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\apphelp.dll

themeui 6.00.3718.0 (dnsv.021114-1947) 823.00 KB (842,752 bytes)

bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\themeui.dll

msimg32 5.2.3718.0 (dnsv.021114-1947) 7.00 KB (7,168 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\msimg32.dll

linkinfo 5.2.3718.0 (dnsv.021114-1947) 42.00 KB (43,008 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\linkinfo.dll

ntshui 6.00.3718.0 (dnsv.021114-1947) 233.00 KB (238,592 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\ntshui.dll

urlmon 6.00.3718.0 (dnsv.021114-1947) 1.18 MB (1,232,384 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\urlmon.dll

webcheck 6.00.3718.0 (dnsv.021114-1947) 665.00 KB (680,960 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\webcheck.dll

stobject 5.2.3718.0 (dnsv.021114-1947) 178.00 KB (182,272 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\stobject.dll

batmeter 6.00.3718.0 (dnsv.021114-1947) 55.50 KB (56,832 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\batmeter.dll

powrprof 6.00.3718.0 (dnsv.021114-1947) 36.00 KB (36,864 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\powrprof.dll

printui 5.2.3718.0 (dnsv.021114-1947) 1.09 MB (1,143,296 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\printui.dll

cfgmgr32 5.2.3718.0 (dnsv.021114-1947) 15.50 KB (15,872 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\cfgmgr32.dll

drprov 5.2.3718.0 (dnsv.021114-1947) 26.50 KB (27,136 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\drprov.dll

ntlanman 5.2.3718.0 (dnsv.021114-1947) 108.00 KB (110,592 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\ntlanman.dll

netui0 5.2.3718.0 (dnsv.021114-1947) 181.50 KB (185,856 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\netui0.dll

netui1 5.2.3718.0 (dnsv.021114-1947) 482.00 KB (493,568 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\netui1.dll

davclnt 5.2.3718.0 (dnsv.021114-1947) 59.00 KB (60,416 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\davclnt.dll

browseui 6.00.3718.0 (dnsv.021114-1947) 61.00 KB (62,464 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\browseui.dll

shdoclc 6.00.3718.0 (dnsv.021114-1947) 520.50 KB (532,992 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\shdoclc.dll

actxprxy 6.00.3718.0 (dnsv.021114-1947) 230.00 KB (235,520 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\actxprxy.dll

mydocs 6.00.3718.0 (dnsv.021114-1947) 129.00 KB (132,096 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\mydocs.dll

mprui 5.2.3718.0 (dnsv.021114-1947) 97.00 KB (99,328 bytes) 11/18/2002 9:00 PM Microsoft Corporation c:\windows\system32\mprui.dll

netui2 5.2.3718.0 (dnsvr.021114-1947) 761.50 KB (779,776 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\netui2.dll
 comdlg32 6.00.3718.0 (dnsvr.021114-1947) 706.00 KB (722,944 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\comdlg32.dll
 netmsg 5.2.3718.0 (dnsvr.021114-1947) 177.50 KB (181,760 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\netmsg.dll
 netplwiz 5.2.3718.0 (dnsvr.021114-1947) 1.09 MB (1,147,904 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\netplwiz.dll
 sqlmangr 2000.080.0760.00 225.00 KB (230,400 bytes) 2/7/2003 6:48 AM Microsoft Corporation
 c:\program files\microsoft sql server\80\tools\bin\sqlmangr.exe
 w95scm 2000.080.0760.00 133.50 KB (136,704 bytes) 2/7/2003 6:49 AM Microsoft Corporation
 c:\program files\microsoft sql server\80\tools\bin\w95scm.dll
 odbcb32 3.525.1015.0 620.00 KB (634,880 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\odbcb32.dll
 sqlsvc 2000.080.0760.00 315.50 KB (323,072 bytes) 2/7/2003 6:49 AM Microsoft Corporation
 c:\program files\microsoft sql server\80\tools\bin\sqlsvc.dll
 odbcbcp 2000.085.1015.00 48.00 KB (49,152 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\odbcbcp.dll
 sqlresld 2000.080.0760.00 28.50 KB (29,184 bytes) 2/7/2003 6:49 AM Microsoft Corporation
 c:\program files\microsoft sql server\80\tools\bin\sqlresld.dll
 odbcbint 3.525.1015.0 88.00 KB (90,112 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\odbcbint.dll
 sqlsvc 2000.080.0760.00 2.00 KB (2,048 bytes) 2/6/2003 10:09 PM Microsoft Corporation
 c:\program files\microsoft sql server\80\tools\bin\resources\1033\sqlsvc.rll
 sqlmangr 2000.080.0760.00 75.50 KB (77,312 bytes) 2/6/2003 10:15 PM Microsoft Corporation
 c:\program files\microsoft sql server\80\tools\bin\resources\1033\sqlmangr.rll
 cmd 5.2.3718.0 (dnsvr.021114-1947) 493.00 KB (504,832 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\cmd.exe
 taskmgr 5.2.3718.0 (dnsvr.021114-1947) 311.50 KB (318,976 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\taskmgr.exe
 utildll 5.2.3718.0 (dnsvr.021114-1947) 63.50 KB (65,024 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\utildll.dll
 mmc 5.2.3718.0 (dnsvr.021114-1947) 2.48 MB (2,598,400 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\mmc.exe
 oleacc 4.2.5406.0 (dnsvr.021114-1947) 484.50 KB (496,128 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\oleacc.dll
 mmcbase 5.2.3718.0 (dnsvr.021114-1947) 139.00 KB (142,336 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\mmcbase.dll
 mmcndmgr 5.2.3718.0 (dnsvr.021114-1947) 3.10 MB (3,248,640 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\mmcndmgr.dll
 msxml3 8.40.9214.0 3.41 MB (3,580,416 bytes) 11/18/2002 9:00 PM Microsoft Corporation

c:\windows\system32\msxml3.dll
 dmdukmgr 5.2.3718.0 (dnsvr.021114-1947) 515.00 KB (527,360 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\dmdukmgr.dll
 ntmsapi 5.2.3718.0 (dnsvr.021114-1947) 118.00 KB (120,832 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\ntmsapi.dll
 dmutil 5.2.3718.0 (dnsvr.021114-1947) 71.50 KB (73,216 bytes) 11/15/2002 11:36 PM Microsoft Corporation
 c:\windows\system32\dmutil.dll
 dmdukmres 5.2.3718.0 (dnsvr.021114-1947) 115.00 KB (117,760 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\dmdukmres.dll
 dmduklgs 5.2.3718.0 (dnsvr.021114-1947) 671.00 KB (687,104 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\dmduklgs.dll
 dmview 5.2.3718.0 (dnsvr.021114-1947) 207.50 KB (212,480 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\dmview.ocx
 vds_ps 5.2.3718.0 (dnsvr.021114-1947) 31.00 KB (31,744 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\vds_ps.dll
 dmduksitf 5.2.3718.0 (dnsvr.021114-1947) 321.50 KB (329,216 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\dmduksitf.dll
 mlang 6.00.3718.0 (dnsvr.021114-1947) 799.00 KB (818,176 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\mlang.dll
 vds 5.2.3718.0 (dnsvr.021114-1947) 535.00 KB (547,840 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\vds.exe
 osuninst 5.2.3718.0 (dnsvr.021114-1947) 6.50 KB (6,656 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\osuninst.dll
 vdsutil 5.2.3718.0 (dnsvr.021114-1947) 98.00 KB (100,352 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\vdsutil.dll
 vdsbas 5.2.3718.0 (dnsvr.021114-1947) 321.50 KB (329,216 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\vdsbas.dll
 fmifs 5.2.3718.0 (dnsvr.021114-1947) 53.00 KB (54,272 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\fmifs.dll
 ulib 5.2.3718.0 (dnsvr.021114-1947) 448.50 KB (459,264 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\ulib.dll
 ifsutil 5.2.3718.0 (dnsvr.021114-1947) 214.00 KB (219,136 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\ifsutil.dll
 vdsdyndr 5.2.3718.0 (dnsvr.021114-1947) 710.00 KB (727,040 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\vdsdyndr.dll
 dmintf 5.2.3718.0 (dnsvr.021114-1947) 25.00 KB (25,600 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\dmintf.dll
 dmadmin 5.2.3718.0 (dnsvr.021114-1947) 641.00 KB (656,384 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\dmadmin.exe
 helpctr 5.2.3718.0 (dnsvr.021114-1947) 1.97 MB (2,067,456 bytes) 2/3/2003 11:09 AM Microsoft Corporation
 c:\windows\system32\helpctr\binaries\helpctr.exe
 hcappres 5.2.3718.0 (dnsvr.021114-1947) 6.00 KB (6,144 bytes)

2/3/2003 11:09 AM Microsoft Corporation
 c:\windows\system32\helpctr\binaries\hcappres.dll
 itss 5.2.3718.0 (dnsvr.021114-1947) 349.00 KB (357,376 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\itss.dll
 pchshell 5.2.3718.0 (dnsvr.021114-1947) 277.00 KB (283,648 bytes) 2/3/2003 11:09 AM Microsoft Corporation
 c:\windows\system32\pchshell.dll
 mshtml 6.00.3718.0 (dnsvr.021114-1947) 7.82 MB (8,204,800 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\mshtml.dll
 msimtf 5.2.3718.0 (dnsvr.021114-1947) 528.00 KB (540,672 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\msimtf.dll
 msctf 5.2.3718.0 (dnsvr.021114-1947) 924.50 KB (946,688 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\msctf.dll
 jscript 5.6.0.8028 1.21 MB (1,268,736 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\jscript.dll
 msls31 3.10.349.0 448.00 KB (458,752 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\msls31.dll
 imm32 5.2.3718.0 (dnsvr.021114-1947) 307.50 KB (314,880 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\imm32.dll
 mshtml 6.00.3718.0 (dnsvr.021114-1947) 1.34 MB (1,408,512 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\mshtml.dll
 vbscript 5.6.0.8028 1.06 MB (1,110,016 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\vbscript.dll
 mfc42 6.00.2282.0 3.36 MB (3,526,656 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\mfc42.dll
 msinfo 5.2.3718.0 (dnsvr.021114-1947) 1.20 MB (1,257,984 bytes) 2/3/2003 11:09 AM Microsoft Corporation
 c:\windows\system32\helpctr\binaries\msinfo.dll
 riched32 5.2.3718.0 (dnsvr.021114-1947) 5.00 KB (5,120 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\riched32.dll
 riched20 5.31.23.1218 1.25 MB (1,313,280 bytes) 11/18/2002 9:00 PM Microsoft Corporation
 c:\windows\system32\riched20.dll
 helpsvc 5.2.3718.0 (dnsvr.021114-1947) 2.18 MB (2,288,640 bytes) 2/3/2003 11:09 AM Microsoft Corporation
 c:\windows\system32\helpctr\binaries\helpsvc.exe

[Services]

Display Name	Name	State	Start Mode	Service Type	Path	Error Control	Start Name	Tag ID
Alerter	Alerter	Stopped	Disabled	Share Process	c:\windows\system32\svchost.exe -k localservice	Normal	NT AUTHORITY\LocalService	0
Application Layer Gateway	Gateway Service	ALG	Stopped	Manual	Own Process			
AUTHORITY\LocalService	0							
Application Management	AppMgmt	Stopped	Manual	Share Process	c:\windows\system32\svchost.exe			
-k netsvcs	Normal	LocalSystem	0					
Windows Audio	AudioSrv	Stopped	Disabled	Share Process	c:\windows\system32\svchost.exe -k netsvcs	Normal	LocalSystem	0

Background Intelligent Transfer Service BITS Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Computer Browser Browser Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Indexing Service CIsvc Stopped Manual Share
Process c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe Normal
LocalSystem 0
COM+ System Application COMSysApp Stopped
Manual Own Process
c:\windows\system32\dllhost.exe /processid:{02d4b3f1-
fd88-11d1-960d-00805fc79235} Normal LocalSystem
0
Cryptographic Services CryptSvc Running Auto
Share Process c:\windows\system32\svchost.exe
-k netsvcs Normal LocalSystem 0
Distributed File System Dfs Running Auto
Own Process c:\windows\system32\dfsrv.exe
Normal LocalSystem 0
DHCP Client Dhcp Running Auto Share
Process c:\windows\system32\svchost.exe -k networkservice
Normal NT AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service dmadmin Running
Manual Share Process
c:\windows\system32\dmadmin.exe /com Normal
LocalSystem 0
Logical Disk Manager dmserver Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
DNS Client Dnscache Running Auto Share Process
c:\windows\system32\svchost.exe -k networkservice
Normal NT AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running Auto
Share Process c:\windows\system32\svchost.exe
-k winerr Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe Normal
LocalSystem 0
COM+ Event System EventSystem Running Manual
Share Process c:\windows\system32\svchost.exe
-k netsvcs Normal LocalSystem 0
Help and Support helpsvc Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Human Interface Device Access HidServ Stopped Disabled
Share Process c:\windows\system32\svchost.exe
-k netsvcs Normal LocalSystem 0
HTTP SSL HTTPFilter Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IAS Jet Database Access IASJet Stopped Manual
Share Process c:\windows\system32\svchost.exe
-k iasjet Normal LocalSystem 0
IMAPI CD-Burning COM Service ImapiService Stopped
Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem 0

Intersite Messaging IsmServ Stopped Disabled Own
Process c:\windows\system32\ismerv.exe Normal
LocalSystem 0
Kerberos Key Distribution Center kdc Stopped Disabled
Share Process c:\windows\system32\lsass.exe
Normal LocalSystem 0
Server lanmanserver Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Workstation lanmanworkstation Running Auto
Share Process c:\windows\system32\svchost.exe
-k netsvcs Normal LocalSystem 0
License Logging LicenseService Stopped Disabled
Own Process c:\windows\system32\lssrv.exe
Normal NT AUTHORITY\NetworkService 0
TCP/IP NetBIOS Helper LmHosts Running Auto
Share Process c:\windows\system32\svchost.exe
-k localservice Normal NT AUTHORITY\LocalService
0
Messenger Messenger Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Distributed Transaction Coordinator MSDTC Running
Auto Own Process
c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 0
Windows Installer MSIExec Stopped Manual Share
Process c:\windows\system32\msiexec.exe /v Normal
LocalSystem 0
Microsoft Search MSSEARCH Running Auto
Share Process "c:\program files\common
files\system\mssearch\bin\mssearch.exe" Normal
LocalSystem 0
MSSQLSERVER MSSQLSERVER Stopped Manual
Own Process c:\program files\microsoft sql
server\mssql\bin\sqlservr.exe -smssqlserver Normal
LocalSystem 0
MSSQLServerADHelper MSSQLServerADHelper
Stopped Manual Own Process c:\program
files\microsoft sql server\80\tools\bin\sqladhlp.exe Normal
LocalSystem 0
MSSQLServerOLAPService MSSQLServerOLAPService
Stopped Manual Own Process c:\program
files\microsoft analysis services\bin\msmdsrv.exe Normal
LocalSystem 0
Network DDE NetDDE Stopped Disabled Share
Process c:\windows\system32\netdde.exe Normal
LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped Disabled
Share Process c:\windows\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Network Location Awareness (NLA) Nla Running
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
File Replication NtFrs Stopped Manual Own

Process c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSsp Running Manual
Share Process c:\windows\system32\lsass.exe
Normal LocalSystem 0
Removable Storage NtmsSvc Stopped Manual Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Plug and Play PlugPlay Running Auto Share
Process c:\windows\system32\services.exe Normal
LocalSystem 0
IPSEC Services PolicyAgent Running Auto
Share Process c:\windows\system32\lsass.exe
Normal LocalSystem 0
Protected Storage ProtectedStorage Running Auto
Share Process c:\windows\system32\lsass.exe
Normal LocalSystem 0
Remote Access Auto Connection Manager RasAuto Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Remote Access Connection Manager RasMan Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Remote Desktop Help Session Manager RDSessMgr
Stopped Manual Own Process
c:\windows\system32\sessmgr.exe Normal
LocalSystem 0
Routing and Remote Access RemoteAccess Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Remote Registry RemoteRegistry Running Auto
Share Process c:\windows\system32\svchost.exe
-k regsvc Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\windows\system32\locator.exe Normal NT
AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running Auto
Share Process c:\windows\system32\svchost -k
rpcss Normal LocalSystem 0
Resultant Set of Policy Provider RSOPProv Stopped Manual
Share Process
c:\windows\system32\rsopprov.exe Normal
LocalSystem 0
Special Administration Console Helper sacsrv Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Security Accounts Manager SamSs Running Auto
Share Process c:\windows\system32\lsass.exe
Normal LocalSystem 0
Smart CardSCardSvr Stopped Manual Share Process
c:\windows\system32\scardsvr.exe Ignore
NT AUTHORITY\LocalService 0
Task Scheduler Schedule Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Secondary Logon seclogon Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcs Ignore

```

LocalSystem 0
System Event Notification SENS Running Auto
Share Process c:\windows\system32\svchost.exe
-k netsvcs Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs Ignore
LocalSystem 0
Print Spooler Spooler Running Auto Own
Process c:\windows\system32\spoolsv.exe Normal
LocalSystem 0
SQLSERVERAGENT SQLSERVERAGENT Stopped Manual
Own Process c:\program files\microsoft sql
server\mssql\bin\sqlagent.exe -i mssqlserver Normal
LocalSystem 0
Windows Image Acquisition (WIA) stisvc Stopped Disabled
Share Process c:\windows\system32\svchost.exe
-k imgsvc Normal NT AUTHORITY\LocalService 0
Microsoft Software Shadow Copy Provider swprv Stopped
Manual Own Process
c:\windows\system32\svchost.exe -k swprv Normal
LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Manual Own Process
c:\windows\system32\smlogsvc.exe Normal
NT Authority\NetworkService 0
Telephony TapiSrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv Normal
LocalSystem 0
Terminal Services TermService Running Manual
Share Process c:\windows\system32\svchost.exe
-k termsvcs Normal LocalSystem 0
Telnet TintSrv Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe Normal NT
AUTHORITY\LocalService 0
Distributed Link Tracking Server TrkSvr Stopped Disabled
Share Process c:\windows\system32\svchost.exe
-k netsvcs Normal LocalSystem 0
Distributed Link Tracking Client TrkWks Running Auto
Share Process c:\windows\system32\svchost.exe
-k netsvcs Normal LocalSystem 0
Terminal Services Session Directory Tssdis Stopped
Disabled Own Process
c:\windows\system32\tssdis.exe Normal
LocalSystem 0
Upload Manager uploadmgr Stopped Disabled Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Uninterruptible Power Supply UPS Stopped Manual
Own Process c:\windows\system32\ups.exe
Normal NT AUTHORITY\LocalService 0
Virtual Disk Service vds Running Manual Own
Process c:\windows\system32\vdsv.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vsstvc.exe Normal
LocalSystem 0
Windows Time W32Time Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k localservice

```

```

Normal NT AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service WinHttpAutoProxySvc
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k localservice
Normal NT AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs Ignore
LocalSystem 0
Windows Management Instrumentation Driver Extensions Wmi
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped Manual
Own Process
c:\windows\system32\wbem\wmiaprv.exe Normal
LocalSystem 0
Automatic Updates wuauerv Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Wireless Configuration WZCSVC Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcs Normal
LocalSystem 0

```

[Program Groups]

Group Name	Name	User Name	Default
Accessories	Default User:Accessories		Default
Accessories\Accessibility	Default		
User:Accessories\Accessibility	Default User		
Accessories\Entertainment	Default		
User:Accessories\Entertainment	Default User		
Startup	Default User:Startup	Default User	
Accessories	All Users:Accessories	All Users	
Accessories\Accessibility	All		
Users:Accessories\Accessibility	All Users		
Accessories\Communications	All		
Users:Accessories\Communications	All Users		
Accessories\Entertainment	All		
Users:Accessories\Entertainment	All Users		
Accessories\System Tools	All Users:Accessories\System Tools		
Administrative Tools	All Users:Administrative Tools	All Users	
Microsoft SQL Server	All Users:Microsoft SQL Server	All Users	
Startup	All Users:Startup	All Users	
Accessories	NT AUTHORITY\SYSTEM:Accessories		
	NT AUTHORITY\SYSTEM		
Accessories\Accessibility	NT		
AUTHORITY\SYSTEM:Accessories\Accessibility		NT	
AUTHORITY\SYSTEM			
Accessories\Entertainment	NT		
AUTHORITY\SYSTEM:Accessories\Entertainment		NT	
AUTHORITY\SYSTEM			
Startup	NT AUTHORITY\SYSTEM:Startup	NT	
AUTHORITY\SYSTEM			
Accessories	ASAMA\Administrator:Accessories		
	ASAMA\Administrator		
Accessories\Accessibility	ASAMA\Administrator:Accessories\Accessibility		
	ASAMA\Administrator		
Accessories\Entertainment			

```

ASAMA\Administrator:Accessories\Entertainment
ASAMA\Administrator
Administrative Tools ASAMA\Administrator:Administrative Tools
ASAMA\Administrator
QLogic Corporation ASAMA\Administrator:QLogic Corporation
ASAMA\Administrator
QLogic Corporation\SANblade Control VIX
ASAMA\Administrator:QLogic Corporation\SANblade
Control VIX ASAMA\Administrator
Startup ASAMA\Administrator:Startup ASAMA\Administrator

```

[Startup Programs]

Program	Command	User Name	Location	Startup
desktop	desktop.ini	NT AUTHORITY\SYSTEM		Startup
desktop	desktop.ini	ASAMA\Administrator		Startup
desktop	desktop.ini	.DEFAULT		Startup
desktop	desktop.ini	All Users	Common	Startup
Service Manager	c:\progra~1\micro~1\80\tools\bin\sqlmangr.exe /n	All Users	Common	Startup

[OLE Registration]

Object	Local Server
Sound (OLE2)	sndrec32.exe
Media Clip	mplay32.exe
Video Clip	mplay32.exe /avi
MIDI Sequence	mplay32.exe /mid
Sound	Not Available
Media Clip	Not Available
WordPad Document	"%programfiles%\windows nt\accessories\wordpad.exe"
Bitmap Image	mspaint.exe

[Windows Error Reporting]

Time	Type	Details
2/8/2003 7:29 PM	Application Error	Faulting application sqlopt.exe, version 2000.80.761.0, faulting module ntdll.dll, version 5.2.3718.0, fault address 0x0000000002ee60.
 2/11/2003 7:08 PM
	Application Hang	Hanging application mmc.exe, version 5.2.3718.0, hang module comctl32.dll, version 5.82.3718.0, hang address 0x0000000000f2ba0.

[Internet Settings]

[Internet Explorer]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Version	6.0.3718.0
Build	63718
Application Path	C:\Program Files\Internet Explorer
Language	English (United States)
Active Printer	Not Available
Cipher Strength	128-bit

Content Advisor Disabled
IEAK Install No

[File Versions]

File	Version	Size	Date	Path	Company
actxprxy.dll	6.0.3718.0	230 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
advpack.dll	6.0.3718.0	240 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
asctrls.ocx	6.0.3718.0	219 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
browsecl.dll	6.0.3718.0	61 KB	11/18/2002	9:00:00 PM	
PM	C:\WINDOWS\system32				Microsoft Corporation
browseui.dll	6.0.3718.0	2,478 KB	11/18/2002	9:00:00 PM	
PM	C:\WINDOWS\system32				Microsoft Corporation
cdfview.dll	6.0.3718.0	292 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
comctl32.dll	5.82.3718.0	1,584 KB	11/18/2002	9:00:00 PM	
9:00:00 PM	C:\WINDOWS\system32				Microsoft Corporation
dxttrans.dll	6.3.3718.0	562 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
dxtmsft.dll	6.3.3718.0	919 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3718.0	666 KB	11/18/2002	9:00:00 PM	
9:00:00 PM	C:\WINDOWS\system32				Microsoft Corporation
iepeers.dll	6.0.3718.0	652 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
iesetup.dll	6.0.3718.0	83 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
ieunit.inf	Not Available	19 KB	11/18/2002	9:00:00 PM	
PM	C:\WINDOWS\system32				Not Available
ieexplore.exe	6.0.3718.0	102 KB	11/18/2002	9:00:00 PM	
PM	C:\Program Files\Internet Explorer				Microsoft Corporation
imgutil.dll	6.0.3718.0	88 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
inetctl.cpl	6.0.3718.0	574 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
inetctl.dll	6.0.3718.0	108 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
inseng.dll	6.0.3718.0	212 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
mlang.dll	6.0.3718.0	799 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
msencode.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
Available	Not Available	Not Available	Not Available	Not Available	Not Available
mshta.exe	6.0.3718.0	59 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
mshtml.dll	6.0.3718.0	8,013 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
mshtml.tlb	6.0.3718.0	1,319 KB	11/18/2002	9:00:00 PM	
	C:\WINDOWS\system32				Microsoft Corporation
mshtmlled.dll	6.0.3718.0	1,376 KB	11/18/2002	9:00:00 PM	
PM	C:\WINDOWS\system32				Microsoft Corporation
mshtmlr.dll	6.0.3718.0	56 KB	11/18/2002	9:00:00 PM	

PM	C:\WINDOWS\system32	Microsoft Corporation
msident.dll	6.0.3718.0 128 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
msidentld.dll	6.0.3718.0 14 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
msieftpl.dll	6.0.3718.0 536 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
msrating.dll	6.0.3718.0 379 KB	11/18/2002 9:00:00 PM
PM	C:\WINDOWS\system32	Microsoft Corporation
mstime.dll	6.0.3718.0 1,621 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
occache.dll	6.0.3718.0 201 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
proctexe.ocx	<File Missing>	Not Available
	Not Available	Not Available
Available	Not Available	Not Available
sendmail.dll	6.0.3718.0 97 KB	11/18/2002 9:00:00 PM
PM	C:\WINDOWS\system32	Microsoft Corporation
shdoclc.dll	6.0.3718.0 521 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
shdocvw.dll	6.0.3718.0 3,271 KB	11/18/2002 9:00:00 PM
PM	C:\WINDOWS\system32	Microsoft Corporation
shfolder.dll	6.0.3718.0 37 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
shlwapi.dll	6.0.3718.0 720 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
tdc.ocx	1.3.0.3130 177 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
url.dll	6.0.3718.0 45 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
urlmon.dll	6.0.3718.0 1,204 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation
webcheck.dll	6.0.3718.0 665 KB	11/18/2002 9:00:00 PM
PM	C:\WINDOWS\system32	Microsoft Corporation
wininet.dll	6.0.3718.0 1,458 KB	11/18/2002 9:00:00 PM
	C:\WINDOWS\system32	Microsoft Corporation

[Connectivity]

Item	Value
Connection Preference	Never dial

LAN Settings

AutoConfigProxy	Not Available
AutoProxyDetectMode	Disabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

[Following are sub-categories of this main category]
[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\NetworkService\Local Settings\Temporary Internet Files
Total Disk Space	Not Available
Available Disk Space	Not Available

Maximum Cache Size Not Available
Available Cache Size Not Available

[List of Objects]

Program File	Status	CodeBase
No cached object information available		

[Content]

[Following are sub-categories of this main category]
[Summary]

Item	Value	Disabled
Content Advisor		Disabled

[Personal Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
No personal certificate information available				

[Other People Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
No other people certificate information available				

[Publishers]

Name
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Medium-low
Trusted sites	Low
Internet	Medium
Restricted sites	High

<Client Configuration>

COM+ Application Configuration

-- COM+ Settings (properties of component TPCC.ALLTxns)
-- for each 23 frontends

Transactions: not supported

Enable object pooling	- Minimum pool size: 23 - Maximum pool size: 23 - Creation timeout (ms): 120000
Enable object construction	- Constructor string: "dummy string (do not remove)"
Enable just in time activation	

Component supports events and statistics

Concurrency: required

TPCC Application Registry

```
[[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC]
"Path"="C:\inetpub\wwwroot\
"NumberOfDeliveryThreads"=dword:00000004
"MaxConnections"=dword:00003e80
"MaxPendingDeliveries"=dword:00000bb8
"DB_Protocol"="DBLIB"
"TxnMonitor"="COM"
"DbServer"="asama"
"DbName"="tpcc"
"DbUser"="sa"
"DbPassword"=""
"COM_SinglePool"="YES"
```

InetInfo Registry

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Inet
Info]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Inet
Info\Parameters]
"ListenBackLog"=dword:000000fa
"DispatchEntries"=hex(7):4c,00,44,00,41,00,50,00,53,00,56,00,43,00,
,00,00,53,00,\
4d,00,54,00,50,00,53,00,56,00,43,00,00,00,00,00
"PoolThreadLimit"=dword:000007fc
"ThreadTimeout"=dword:00015180
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Inet
Info\Performance]
"Library"="infectrs.dll"
"Open"="OpenINFOPerformanceData"
"Close"="CloseINFOPerformanceData"
"Collect"="CollectINFOPerformanceData"
"Last Counter"=dword:00000842
"Last Help"=dword:00000843
"First Counter"=dword:00000802
"First Help"=dword:00000803
"Library Validation
Code"=hex:e6,45,82,e3,61,b6,c2,01,10,25,00,00,00,00,00
"WbemAdapFileTime"=hex:00,c3,bb,02,47,d4,c0,01
"WbemAdapFileSize"=dword:00002510
"WbemAdapStatus"=dword:00000000
```

WWW Service Registry

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC]
"Type"=dword:00000020
"Start"=dword:00000002
"ErrorControl"=dword:00000001
"ImagePath"=hex(2):43,00,3a,00,5c,00,57,00,49,00,4e,00,4e,00,54,0
0,5c,00,53,00,\
```

```
79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,69,00,6e,00,65,00,
74,00,73,\
```

```
00,72,00,76,00,5c,00,69,00,6e,00,65,00,74,00,69,00,6e,00,66,00,6f,
00,2e,00,\
65,00,78,00,65,00,00,00
"DisplayName"="World Wide Web Publishing Service"
"DependOnService"=hex(7):49,00,49,00,53,00,41,00,44,00,4d,00,49,
00,4e,00,00,00,\
00,00
"DependOnGroup"=hex(7):00,00
"ObjectName"="LocalSystem"
"Description"="Provides Web connectivity and administration through
the Internet Information Services snap-in."
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\ASP]
"NOTE"="This is for backward compatibility only."
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\ASPI\Parameters]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\Parameters]
"MajorVersion"=dword:00000005
"MinorVersion"=dword:00000000
"InstallPath"="C:\WINNT\System32\inetrv"
"CertMapList"="C:\WINNT\System32\inetrv\iisrmap.dll"
"AccessDeniedMessage"="Error: Access is Denied."
"Filter DLLs"=""
"LogFileDirectory"="C:\WINNT\System32\LogFiles"
"AcceptExOutstanding"=dword:000003e8
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\Parameters\ADCLaunch]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\Parameters\ADCLaunch\AdvancedDataFactory]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\Parameters\ADCLaunch\RDSServer.DataFactory]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\Parameters\Script Map]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\Parameters\Virtual Roots]
"/"="c:\inetpub\wwwroot,.205"
"/Scripts"="c:\inetpub\scripts,.204"
"/IISHelp"="c:\winnt\help\iishelp,.201"
"/IISAdmin"="C:\WINNT\System32\inetrv\iisadmin,.201"
"/IISamples"="c:\inetpub\iisamples,.201"
"/MSADC"="c:\program files\common files\system\msadc,.205"
"/_vti_bin"="C:\Program Files\Common Files\Microsoft
Shared\Web Server Extensions\40\isapi,.205"
"/Printers"="C:\WINNT\web\printers,.201"
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\Performance]
"Library"="w3ctrs.dll"
"Open"="OpenW3PerformanceData"
```

```
"Close"="CloseW3PerformanceData"
"Collect"="CollectW3PerformanceData"
"Last Counter"=dword:000008e6
"Last Help"=dword:000008e7
"First Counter"=dword:00000844
"First Help"=dword:00000845
"Library Validation
Code"=hex:ee,4e,14,e6,61,b6,c2,01,10,3d,00,00,00,00,00,00
"WbemAdapFileTime"=hex:00,c3,bb,02,47,d4,c0,01
"WbemAdapFileSize"=dword:00001d10
"WbemAdapStatus"=dword:00000000
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\Security]
"Security"=hex:01,00,14,80,a0,00,00,00,ac,00,00,00,14,00,00,00,30,
00,00,00,02,\
```

```
00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00,00,00,00,00,
1,00,00,\
```

```
00,00,02,00,70,00,04,00,00,00,00,00,18,00,fd,01,02,00,01,01,00,00,
00,00,00,\
```

```
05,12,00,00,00,74,00,6f,00,00,00,1c,00,ff,01,0f,00,01,02,00,00,00,
,00,05,\
```

```
20,00,00,00,20,02,00,00,72,00,73,00,00,00,18,00,8d,01,02,00,01,01,
00,00,00,\
```

```
00,00,05,0b,00,00,00,20,02,00,00,00,00,1c,00,fd,01,02,00,01,02,00,
00,00,00,\
```

```
00,05,20,00,00,00,23,02,00,00,72,00,73,00,01,01,00,00,00,00,05,
12,00,00,\
00,01,01,00,00,00,00,05,12,00,00,00
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3
SVC\Enum]
"0"="Root\LEGACY_W3SVC\0000"
"Count"=dword:00000001
"NextInstance"=dword:00000001
```

System Information

System Information report written at: 02/19/2003 03:57:53 AM
[System Information]

[Following are sub-categories of this main category]

[System Summary]

Item	Value
OS Name	Microsoft Windows 2000 Server
Version	5.0.2195 Service Pack 2 Build 2195
OS Manufacturer	Microsoft Corporation
System Name	ACL03
System Manufacturer	NEC
System Model	Express5800/120Re-2 [N8100-817]
System Type	X86-based PC
Processor	x86 Family 15 Model 2 Stepping 4 GenuineIntel ~1795

Adapter OK
 0xFE9A0000-0xFE9BFFFF Intel(R) PRO/100 S Server
 Adapter OK
 0xFE9F0000-0xFE9F0FFF QLogic QLA23xx PCI Fibre
 Channel Adapter OK
 0xFD000000-0xFDFFFFFF ATI Technologies Inc. RAGE XL
 PCI OK
 0xFE7F0000-0xFE7F0FFF ATI Technologies Inc. RAGE XL
 PCI OK
 0xFFC00000-0xFFFFFFFF Intel(r) 82802 Firmware Hub
 Device OK
 0xFFBFFC00-0xFFBFFFFF Standard Dual Channel PCI IDE
 Controller OK

[Components]

[Following are sub-categories of this main category]

[Multimedia]

[Following are sub-categories of this main category]

[Audio Codecs]

Codec	Manufacturer File	Description Version	Status Size	Creation Date		
c:\winnt\system32\lhacm.acm	OK	C:\WINNT\System32\LHACM.ACM	Microsoft Corporation	4.4.3385	33.27 KB (34,064 bytes)	1/7/2003
3:35:27 PM						
c:\winnt\system32\iac25_32.ax	OK	C:\WINNT\System32\IAC25_32.AX	Intel Corporation	2.05.53	195.00 KB (199,680 bytes)	12/8/1999 5:00:00 AM
audio software						
c:\winnt\system32\msgsm32.acm	OK	C:\WINNT\System32\MSGSM32.ACM	Microsoft Corporation	5.00.2134.1	22.27 KB (22,800 bytes)	12/8/1999 5:00:00 AM
c:\winnt\system32\msg723.acm	OK	C:\WINNT\System32\MSG723.ACM	Microsoft Corporation	4.4.3385	106.77 KB (109,328 bytes)	1/7/2003
3:35:26 PM						
c:\winnt\system32\tsssoft32.acm	OK	C:\WINNT\System32\TSSOFT32.ACM	DSP GROUP, INC.	1.01	9.27 KB (9,488 bytes)	12/8/1999 5:00:00 AM
c:\winnt\system32\msg711.acm	OK	C:\WINNT\System32\MSG711.ACM	Microsoft Corporation	5.00.2134.1	10.27 KB (10,512 bytes)	12/8/1999 5:00:00 AM
c:\winnt\system32\imaadp32.acm	OK	C:\WINNT\System32\IMAADP32.ACM	Microsoft Corporation	5.00.2134.1	16.27 KB (16,656 bytes)	12/8/1999 5:00:00 AM
c:\winnt\system32\msadp32.acm	OK	C:\WINNT\System32\MSADP32.ACM	Microsoft Corporation	5.00.2134.1	14.77 KB (15,120 bytes)	12/8/1999 5:00:00 AM

[Video Codecs]

Codec	Manufacturer File	Description Version	Status Size	Creation Date		
c:\winnt\system32\ir50_32.dll	OK	C:\WINNT\System32\IR50_32.DLL	Intel Corporation	4.4.3385	163.77 KB (167,696 bytes)	1/7/2003
video 5.10 OK						
c:\winnt\system32\msh261.drv	OK	C:\WINNT\System32\MSH261.DRV	Microsoft Corporation	4.4.3385	163.77 KB (167,696 bytes)	1/7/2003
3:35:27 PM						
c:\winnt\system32\msh263.drv	OK	C:\WINNT\System32\MSH263.DRV	Microsoft Corporation	4.4.3385	252.27 KB (258,320 bytes)	1/7/2003
3:35:01 PM						
c:\winnt\system32\msvidc32.dll	OK	C:\WINNT\System32\MSVIDC32.DLL	Microsoft Corporation	5.00.2134.1	27.27 KB (27,920 bytes)	12/8/1999 5:00:00 AM
c:\winnt\system32\ir32_32.dll	OK	C:\WINNT\System32\IR32_32.DLL	Intel(R) Corporation	Not Available	194.50 KB (199,168 bytes)	12/8/1999 5:00:00 AM
c:\winnt\system32\iccvid.dll	OK	C:\WINNT\System32\ICCVID.DLL	Radius Inc.	1.10.0.6	108.00 KB (110,592 bytes)	12/8/1999 5:00:00 AM
c:\winnt\system32\msrle32.dll	OK	C:\WINNT\System32\MSRLE32.DLL	Microsoft Corporation	5.00.2134.1	10.77 KB (11,024 bytes)	12/8/1999 5:00:00 AM

[CD-ROM]

Item	Value
Drive D:	CD-ROM Drive
Description	CD-ROM Drive
Media Loaded	False
Media Type	CD-ROM
Name	MITSUMI CD-ROM SR243T
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROMMITSUMI_CD-ROM_SR243T_____L02J____\5&2C4DDEAA&0&0.0.0

[Sound Device]

Item	Value
No sound devices	

[Display]

Item	Value
Name	ATI Technologies Inc. RAGE XL PCI
PNP Device ID	PCI\VEN_1002&DEV_4752&SUBSYS_81B41033&REV_

2714&27A7C225&0&60F0
 Adapter Type ATI RAGE XL PCI, ATI Technologies Inc. compatible
 Adapter Description ATI Technologies Inc. RAGE XL PCI
 Adapter RAM 8.00 MB (8,388,608 bytes)
 Installed Drivers atidrab.dll
 Driver Version 5.00.2179.1
 INF File display.inf (atirage3 section)
 Color Planes 1
 Color Table Entries 65536
 Resolution 1024 x 768 x 60 hertz
 Bits/Pixel 16

[Infrared]

Item	Value
No infrared devices	

[Input]

[Following are sub-categories of this main category]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&1E30281&0
NumberOfFunctionKeys	12

[Pointing Device]

Item	Value
Hardware Type	Logitech PS/2 Port Mouse
Number of Buttons	2
Status	OK
PNP Device ID	ACPI\PNP0F12\4&1E30281&0
Power Management Supported	False
Double Click Threshold	6
Handedness	Right Handed Operation

[Modem]

Item	Value
No modems	

[Network]

[Following are sub-categories of this main category]

[Adapter]

Item	Value
Name	[00000000] RAS Async Adapter
Adapter Type	Not Available
Product Name	RAS Async Adapter

Installed True
 PNP Device ID Not Available
 Last ResetNot Available
 Index 0
 Service Name AsyncMac
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name Not Available

Name [00000001] WAN Miniport (L2TP)
 Adapter Type Not Available
 Product Name WAN Miniport (L2TP)
 Installed True
 PNP Device ID ROOT\MS_L2TPMINIPORT\0000
 Last ResetNot Available
 Index 1
 Service Name Rasi2tp
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name Rasi2tp
 Driver c:\winnt\system32\drivers\rasi2tp.sys (50800, 5.00.2179.1)

Name [00000002] WAN Miniport (PPTP)
 Adapter Type Wide Area Network (WAN)
 Product Name WAN Miniport (PPTP)
 Installed True
 PNP Device ID ROOT\MS_PPTPMINIPORT\0000
 Last ResetNot Available
 Index 2
 Service Name PptpMiniport
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 50:50:54:50:30:30
 Service Name PptpMiniport
 Driver c:\winnt\system32\drivers\raspptp.sys (47856, 5.00.2160.1)

Name [00000003] Direct Parallel
 Adapter Type Not Available
 Product Name Direct Parallel
 Installed True
 PNP Device ID ROOT\MS_PTMINIPORT\0000
 Last ResetNot Available

Index 3
 Service Name Raspti
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name Raspti
 Driver c:\winnt\system32\drivers\raspti.sys (16880, 5.00.2146.1)

Name [00000004] WAN Miniport (IP)
 Adapter Type Not Available
 Product Name WAN Miniport (IP)
 Installed True
 PNP Device ID ROOT\MS_NDISWANIP\0000
 Last ResetNot Available
 Index 4
 Service Name NdisWan
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name NdisWan
 Driver c:\winnt\system32\drivers\ndiswan.sys (90096, 5.00.2195.2779)

Name [00000005] Intel(R) 82546EB Based Dual Port Network
 Connection
 Adapter Type Ethernet 802.3
 Product Name Intel(R) 82546EB Based Dual Port Network
 Connection
 Installed True
 PNP Device ID
 PCI\VEN_8086&DEV_1010&SUBSYS_81B41033&REV_01\5&890422F&0&38F818
 Last ResetNot Available
 Index 5
 Service Name E1000
 IP Address 10.10.203.250
 IP Subnet 255.255.255.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:07:E9:04:7E:34
 Service Name E1000
 IRQ Number 30
 I/O Port 0x2480-0x24BF
 Driver c:\winnt\system32\drivers\le1000nt5.sys (100544, 6.2.11.0)

Name [00000006] Intel(R) 82546EB Based Dual Port Network

Connection
 Adapter Type Ethernet 802.3
 Product Name Intel(R) 82546EB Based Dual Port Network
 Connection
 Installed True
 PNP Device ID
 PCI\VEN_8086&DEV_1010&SUBSYS_81B41033&REV_01\5&890422F&0&39F818
 Last ResetNot Available
 Index 6
 Service Name E1000
 IP Address 10.10.3.250
 IP Subnet 255.255.255.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:07:E9:04:7E:35
 Service Name E1000
 IRQ Number 31
 I/O Port 0x2440-0x247F
 Driver c:\winnt\system32\drivers\le1000nt5.sys (100544, 6.2.11.0)

Name [00000007] Intel(R) PRO/100 S Server Adapter
 Adapter Type Ethernet 802.3
 Product Name Intel(R) PRO/100 S Server Adapter
 Installed True
 PNP Device ID
 PCI\VEN_8086&DEV_1229&SUBSYS_10408086&REV_0C\5&890422F&0&48F818
 Last ResetNot Available
 Index 7
 Service Name E100B
 IP Address 10.10.103.250
 IP Subnet 255.255.255.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:02:B3:BE:1A:96
 Service Name E100B
 IRQ Number 27
 I/O Port 0x2400-0x243F
 Driver c:\winnt\system32\drivers\le100bnt5.sys (139536, 6.01.03.0000)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	16 bytes
MaximumMessageSize	0 bytes
MessageOriented	False
MinimumAddressSize	16 bytes

PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData True
 SupportsGracefulClosing True
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD Tcpip [UDP/IP]
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 16 bytes
 MaximumMessageSize 65467 bytes
 MessageOriented True
 MinimumAddressSize 16 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingTrue

Name RSVP UDP Service Provider
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 16 bytes
 MaximumMessageSize 65467 bytes
 MessageOriented True
 MinimumAddressSize 16 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption True
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingTrue

Name RSVP TCP Service Provider
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 16 bytes
 MaximumMessageSize 0 bytes
 MessageOriented False
 MinimumAddressSize 16 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption True
 SupportsExpeditedData True
 SupportsGracefulClosing True

SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{A2D95CC9-1714-4A9C-B51F-1C939087F569}] SEQPACKE 4
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{A2D95CC9-1714-4A9C-B51F-1C939087F569}] DATAGRAM 4
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{4CF0A3E1-8737-4525-BAB5-7F7BE66D9576}] SEQPACKE 3
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{4CF0A3E1-

8737-4525-BAB5-7F7BE66D9576}] DATAGRAM 3
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{FBB458E0-49A9-4964-A50C-D37C9A28B30F}] SEQPACKE 0
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{FBB458E0-49A9-4964-A50C-D37C9A28B30F}] DATAGRAM 0
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{DB635A9E-283B-49C4-B8DC-F38C42DAE871}] SEQPACKE 1
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True

MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{DB635A9E-283B-49C4-B8DC-F38C42DAE871}] DATAGRAM 1
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{B3CEA739-9DAC-4116-B192-BCFA3E7E7AA9}] SEQPACKET 2
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

Name MSAFD NetBIOS [Device\NetBT_Tcpip_{B3CEA739-9DAC-4116-B192-BCFA3E7E7AA9}] DATAGRAM 2
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes

PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticastingFalse

[WinSock]

Item Value
 File c:\winnt\system32\winsock.dll
 Version 3.10
 Size 2.80 KB (2,864 bytes)
 File c:\winnt\system32\wsock32.dll
 Version 5.00.2195.2871
 Size 21.27 KB (21,776 bytes)

[Ports]

[Following are sub-categories of this main category]

[Serial]

Item Value
 Name COM1
 Status OK
 PNP Device ID ACPI\PNP05011
 Maximum Input Buffer Size 0
 Maximum Output Buffer Size False
 Settable Baud Rate True
 Settable Data Bits True
 Settable Flow Control True
 Settable Parity True
 Settable Parity CheckTrue
 Settable Stop Bits True
 Settable RLSD True
 Supports RLSD True
 Supports 16 Bit Mode False
 Supports Special Characters False
 Baud Rate 9600
 Bits/Byte 8
 Stop Bits 1
 Parity None
 Busy 0
 Abort Read/Write on Error 0
 Binary Mode Enabled -1
 Continue XMit on XOff 0
 CTS Outflow Control 0
 Discard NULL Bytes 0
 DSR Outflow Control 0
 DSR Sensitivity 0
 DTR Flow Control Type Enable
 EOF Character 0
 Error Replace Character 0
 Error Replacement Enabled 0

Event Character 0
 Parity Check Enabled0
 RTS Flow Control Type Enable
 XOff Character 19
 XOffXMit Threshold 512
 XOn Character 17
 XOnXMit Threshold 2048
 XOnXOff InFlow Control 0
 XOnXOff OutFlow Control 0
 IRQ Number 4
 I/O Port 0x03F8-0x03FF
 Driver c:\winnt\system32\drivers\serial.sys (62416, 5.00.2195.2780)

Name COM2
 Status OK
 PNP Device ID ACPI\PNP05012
 Maximum Input Buffer Size 0
 Maximum Output Buffer Size False
 Settable Baud Rate True
 Settable Data Bits True
 Settable Flow Control True
 Settable Parity True
 Settable Parity CheckTrue
 Settable Stop Bits True
 Settable RLSD True
 Supports RLSD True
 Supports 16 Bit Mode False
 Supports Special Characters False
 Baud Rate 9600
 Bits/Byte 8
 Stop Bits 1
 Parity None
 Busy 0
 Abort Read/Write on Error 0
 Binary Mode Enabled -1
 Continue XMit on XOff 0
 CTS Outflow Control 0
 Discard NULL Bytes 0
 DSR Outflow Control 0
 DSR Sensitivity 0
 DTR Flow Control Type Enable
 EOF Character 0
 Error Replace Character 0
 Error Replacement Enabled 0
 Event Character 0
 Parity Check Enabled0
 RTS Flow Control Type Enable
 XOff Character 19
 XOffXMit Threshold 512
 XOn Character 17
 XOnXMit Threshold 2048
 XOnXOff InFlow Control 0
 XOnXOff OutFlow Control 0
 IRQ Number 3
 I/O Port 0x02F8-0x02FF
 Driver c:\winnt\system32\drivers\serial.sys (62416, 5.00.2195.2780)

[Parallel]

Item Value
No parallel port information

[Storage]

[Following are sub-categories of this main category]

[Drives]

Item Value
Drive A:
Description 3 1/2 Inch Floppy Drive

Drive C:
Description Local Fixed Disk
Compressed False
File System NTFS
Size 16.93 GB (18,177,835,008 bytes)
Free Space 15.20 GB (16,320,274,432 bytes)
Volume Name
Volume Serial Number E80811C8
Partition Disk #0, Partition #0
Partition Size 16.93 GB (18,177,836,544 bytes)
Starting Offset 32256 bytes
Drive Description Disk drive
Drive Manufacturer (Standard disk drives)
Drive Model QUANTUM ATLAS10K3_18_SCA SCSI Disk Device
Drive BytesPerSector512
Drive MediaLoaded True
Drive MediaType Fixed hard disk media
Drive Partitions 1
Drive SCSIbus 0
Drive SCSILogicalUnit 0
Drive SCSIPort 3
Drive SCISITargetId 0
Drive SectorsPerTrack 63
Drive Size 18186094080 bytes
Drive TotalCylinders 2211
Drive TotalSectors 35519715
Drive TotalTracks 563805
Drive TracksPerCylinder 255

Drive E:
Description Network Connection
Provider Name \\rte03\c\$

[SCSI]

Item Value
Name Adaptec AIC-7899 Ultra160/m PCI SCSI Card
Caption Adaptec AIC-7899 Ultra160/m PCI SCSI Card
Driver adpu160m
Status OK
PNP Device ID
PCI\VEN_9005&DEV_00CF&SUBSYS_81B41033&REV_01\5&17CCB9A0&0&38E818
Device ID
PCI\VEN_9005&DEV_00CF&SUBSYS_81B41033&REV

_01\5&17CCB9A0&0&38E818
Device Map Not Available
Index Not Available
Max Number Controlled Not Available
IRQ Number 50
I/O Port 0x3400-0x34FF
Driver c:\winnt\system32\drivers\adpu160m.sys (64432, v3.10a)

Name Adaptec AIC-7899 Ultra160/m PCI SCSI Card
Caption Adaptec AIC-7899 Ultra160/m PCI SCSI Card
Driver adpu160m
Status OK
PNP Device ID
PCI\VEN_9005&DEV_00CF&SUBSYS_81B41033&REV_01\5&17CCB9A0&0&38E818
Device ID
PCI\VEN_9005&DEV_00CF&SUBSYS_81B41033&REV_01\5&17CCB9A0&0&38E818

Device Map Not Available
Index Not Available
Max Number Controlled Not Available
IRQ Number 49
I/O Port 0x3000-0x3FFF
Driver c:\winnt\system32\drivers\adpu160m.sys (64432, v3.10a)

Name QLogic QLA23xx PCI Fibre Channel Adapter
Caption QLogic QLA23xx PCI Fibre Channel Adapter
Driver ql2300
Status OK
PNP Device ID
PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\5&890422F&0&50F818
Device ID
PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_02\5&890422F&0&50F818
Device Map Not Available
Index Not Available
Max Number Controlled Not Available
IRQ Number 28
I/O Port 0x2000-0x3FFF
Driver c:\winnt\system32\drivers\ql2300.sys (442328, 8.2.0.10 (W2K VI))

[Printing]

Name Port Name Server Name
No printing information

[Problem Devices]

Device PNP Device ID Error Code
PCI Device
PCI\VEN_8086&DEV_2541&SUBSYS_81B41033&REV_03\3&267A616A&0&01 28
System Interrupt Controller
PCI\VEN_8086&DEV_1461&SUBSYS_81B41033&REV_03\4&82C0EAA&0&E018 28
System Interrupt Controller

PCI\VEN_8086&DEV_1461&SUBSYS_81B41033&REV_03\4&82C0EAA&0&F018 28
PCI Device
PCI\VEN_8086&DEV_2546&SUBSYS_81B41033&REV_03\3&267A616A&0&19 28
PCI Device
PCI\VEN_8086&DEV_2483&SUBSYS_81B41033&REV_02\3&267A616A&0&FB 28

[USB]

Device PNP Device ID
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_2482&SUBSYS_81B41033&REV_02\3&267A616A&0&E8
USB Root Hub USB\ROOT_HUB\4&42B666F&0
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_2484&SUBSYS_81B41033&REV_02\3&267A616A&0&E9
USB Root Hub USB\ROOT_HUB\4&396CDB1C&0

[Software Environment]

[Following are sub-categories of this main category]

[Drivers]

Name	Description	File	Type	Started
Control	Start Mode	State	Status	Error
abiosdsk	Abiosdsk	Not Available	Kernel Driver	
	Accept Pause	Accept Stop		
	False	Disabled	Stopped	OK
	False	False	Stopped	Ignore
abp480n5	abp480n5	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	False	False	Stopped	Normal
acpi	Microsoft ACPI Driver			
	c:\winnt\system32\drivers\acpi.sys		Kernel	
Driver	True	Boot	Running	OK
	False	True		
acpiec	Microsoft Embedded Controller Driver			
	c:\winnt\system32\drivers\acpiec.sys		Kernel	
Driver	True	Boot	Running	OK
	False	True		
adpu160m	adpu160m	c:\winnt\system32\drivers\adpu160m.sys		
	Kernel Driver	True	Boot	Running
	OK	Normal	False	True
afd	AFD Networking Support Environment			
	c:\winnt\system32\drivers\afd.sys		Kernel	
Driver	True	Auto	Running	OK
	False	True		
aha154x	Aha154x	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	False	False		Normal
aic116x	aic116x	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	False	False		Normal
aic78u2	aic78u2	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	False	False		Normal
aic78xx	aic78xx	Not Available	Kernel Driver	

	False	Disabled	Stopped	OK	Normal
	False	False			
ami0nt	ami0nt	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
amsint	amsint	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
asc	asc	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
asc3350p	asc3350p	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
asc3550	asc3550	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
asynmac	RAS Asynchronous Media Driver				
	c:\winnt\system32\drivers\asynmac.sys			Kernel	
Driver	False	Manual	Stopped	OK	Normal
	False	False			
atapi	Standard IDE/ESDI Hard Disk Controller				
	c:\winnt\system32\drivers\atapi.sys			Kernel	
Driver	True	Boot	Running	OK	Normal
	False	True			
atdisk	Atdisk	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Ignore
	False	False			
atirage3	atirage3	c:\winnt\system32\drivers\atimpab.sys			
	Kernel Driver	True	Manual	Running	
	OK	Ignore	False	True	
atmarpc	ATM ARP Client Protocol				
	c:\winnt\system32\drivers\atmarpc.sys			Kernel	
Driver	False	Manual	Stopped	OK	Normal
	False	False			
audstub	Audio Stub Driver				
	c:\winnt\system32\drivers\audstub.sys			Kernel	
Driver	True	Manual	Running	OK	Normal
	False	True			
beep	Beep	c:\winnt\system32\drivers\beep.sys			
	Kernel Driver	True	System	Running	
	OK	Normal	False	True	
buslogic	BusLogic	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
cd20xrnt	cd20xrnt	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
cdaudio	Cdaudio	c:\winnt\system32\drivers\cdaudio.sys			
	Kernel Driver	False	System	Stopped	
	OK	Ignore	False	False	
cdfs	Cdfs	c:\winnt\system32\drivers\cdfs.sys			
	File System Driver	True	Disabled	Running	
	OK	Normal	False	True	
cdrom	CD-ROM Driver				
	c:\winnt\system32\drivers\cdrom.sys			Kernel	
Driver	True	System	Running	OK	Normal
	False	True			
changer	Changer	Not Available		Kernel Driver	
	False	System	Stopped	OK	Ignore
	False	False			

cpqarray	Cpqarray	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
cpqarry2	cpqarry2	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
cpqfcalm	cpqfcalm	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
cpqfws2e	cpqfws2e	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
dac960nt	dac960nt	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
deckzpsx	deckzpsx	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
dfsdriver	DfsDriver	c:\winnt\system32\drivers\dfs.sys			
	File System Driver	True	Boot	Running	
	OK	Normal	False	True	
disk	Disk Driver				
	c:\winnt\system32\drivers\disk.sys			Kernel	
Driver	True	Boot	Running	OK	Normal
	False	True			
diskperf	Diskperf	c:\winnt\system32\drivers\diskperf.sys			
	Kernel Driver	True	Boot	Running	
	OK	Normal	False	True	
dmboot	dmboot	c:\winnt\system32\drivers\dmboot.sys			
	Kernel Driver	False	Disabled	Stopped	
	OK	Normal	False	False	
dmio	Logical Disk Manager Driver				
	c:\winnt\system32\drivers\dmio.sys			Kernel	
Driver	True	Boot	Running	OK	Normal
	False	True			
dmload	dmload	c:\winnt\system32\drivers\dmload.sys			
	Kernel Driver	True	Boot	Running	
	OK	Normal	False	True	
e1000	Intel(R) PRO/1000 Adapter Driver				
	c:\winnt\system32\drivers\le1000nt5.sys			Kernel	
Driver	True	Manual	Running	OK	Normal
	False	True			
e100b	Intel(R) PRO Adapter Driver				
	c:\winnt\system32\drivers\le100bnt5.sys			Kernel	
Driver	True	Manual	Running	OK	Normal
	False	True			
efs	EFS	c:\winnt\system32\drivers\efs.sys			
	File System Driver	True	Disabled	Running	
	OK	Normal	False	True	
fastfat	Fastfat	c:\winnt\system32\drivers\fastfat.sys			
	File System Driver	True	Disabled	Running	
	OK	Normal	False	True	
fd16_700	Fd16_700	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
fdc	Floppy Disk Controller Driver				
	c:\winnt\system32\drivers\fdc.sys			Kernel	
Driver	True	Manual	Running	OK	Normal
	False	True			
fips	Fips	c:\winnt\system32\drivers\fips.sys			
	Kernel Driver	True	Auto	Running	

	OK	Normal	False	True	
fireport	fireport	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
flashpnt	flashpnt	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
flpydisk	Floppy Disk Driver				
	c:\winnt\system32\drivers\flpydisk.sys			Kernel	
Driver	True	Manual	Running	OK	Normal
	False	True			
ftdisk	Volume Manager Driver				
	c:\winnt\system32\drivers\ftdisk.sys			Kernel	
Driver	True	Boot	Running	OK	Normal
	False	True			
gpc	Generic Packet Classifier				
	c:\winnt\system32\drivers\msgpc.sys			Kernel	
Driver	True	Manual	Running	OK	Normal
	False	True			
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver				
	c:\winnt\system32\drivers\i8042prt.sys			Kernel	
Driver	True	System	Running	OK	Normal
	False	True			
ini910u	ini910u	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
intelide	Intellde	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
ipfilterdriver	IP Traffic Filter Driver				
	c:\winnt\system32\drivers\ipfltdrv.sys			Kernel	
Driver	False	Manual	Stopped	OK	Normal
	False	False			
ipinip	IP in IP Tunnel Driver				
	c:\winnt\system32\drivers\ipinip.sys			Kernel	
Driver	False	Manual	Stopped	OK	Normal
	False	False			
ipnat	IP Network Address Translator				
	c:\winnt\system32\drivers\ipnat.sys			Kernel	
Driver	False	Manual	Stopped	OK	Normal
	False	False			
ipsec	IPSEC driver				
	c:\winnt\system32\drivers\ipsec.sys			Kernel	
Driver	True	Manual	Running	OK	Normal
	False	True			
ipsraidn	ipsraidn	Not Available		Kernel Driver	
	False	Disabled	Stopped	OK	Normal
	False	False			
isapnp	PnP ISA/EISA Bus Driver				
	c:\winnt\system32\drivers\isapnp.sys			Kernel	
Driver	True	Boot	Running	OK	Critical
	False	True			
kbdclass	Keyboard Class Driver				
	c:\winnt\system32\drivers\kbdclass.sys			Kernel	
Driver	True	System	Running	OK	Normal
	False	True			
ksecdd	KSecDD	c:\winnt\system32\drivers\ksecdd.sys			
	Kernel Driver	True	Boot	Running	
	OK	Normal	False	True	
lbrtfdc	lbrtfdc	Not Available		Kernel Driver	
	False	System	Stopped	OK	Ignore

ip6nds35	False	False	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK	Normal
mnmd	False	False			
	mnmd	c:\winnt\system32\drivers\mnmd.sys			
	Kernel Driver	True	System	Running	
	OK	Ignore	False	True	
modem	Modem	c:\winnt\system32\drivers\modem.sys			
	Kernel Driver	False	Manual	Stopped	
	OK	Ignore	False	False	
mouclass	Mouse Class Driver				
	c:\winnt\system32\drivers\mouclass.sys		Kernel		
Driver	True	System	Running	OK	Normal
	False	True			
mountmgr	MountMgr	c:\winnt\system32\drivers\mountmgr.sys			
	Kernel Driver	True	Boot	Running	
	OK	Normal	False	True	
mraid35x	mraid35x	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
mrxsm	MRXSMB	c:\winnt\system32\drivers\mrxsm.sys			
	File System Driver	True	System	Running	
	OK	Normal	False	True	
msfs	Msfs	c:\winnt\system32\drivers\msfs.sys			
	File System Driver	True	System	Running	
	OK	Normal	False	True	
mskssrv	Microsoft Streaming Service Proxy				
	c:\winnt\system32\drivers\mskssrv.sys		Kernel		
Driver	False	Manual	Stopped	OK	Normal
	False	False			
mspclock	Microsoft Streaming Clock Proxy				
	c:\winnt\system32\drivers\mspclock.sys		Kernel		
Driver	False	Manual	Stopped	OK	Normal
	False	False			
mspqm	Microsoft Streaming Quality Manager Proxy				
	c:\winnt\system32\drivers\mspqm.sys		Kernel		
Driver	False	Manual	Stopped	OK	Normal
	False	False			
mup	Mup	c:\winnt\system32\drivers\mup.sys			
	File System Driver	True	Boot	Running	
	OK	Normal	False	True	
nrc710	Nrc710	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
ndis	NDIS System Driver				
	c:\winnt\system32\drivers\ndis.sys		Kernel		
Driver	True	Boot	Running	OK	Normal
	False	True			
ndistapi	Remote Access NDIS TAPI Driver				
	c:\winnt\system32\drivers\ndistapi.sys		Kernel		
Driver	True	Manual	Running	OK	Normal
	False	True			
ndiswan	Remote Access NDIS WAN Driver				
	c:\winnt\system32\drivers\ndiswan.sys		Kernel		
Driver	True	Manual	Running	OK	Normal
	False	True			
ndproxy	NDIS Proxy				
	c:\winnt\system32\drivers\ndproxy.sys		Kernel		
Driver	True	Manual	Running	OK	Normal
	False	True			
netbios	NetBIOS Interface				

		c:\winnt\system32\drivers\netbios.sys	File		
System Driver	True	System	Running	OK	
	Normal	False	True		
netbt	NetBios over Tcpip				
	c:\winnt\system32\drivers\netbt.sys		Kernel		
Driver	True	System	Running	OK	Normal
	False	True			
netdetect	NetDetect	c:\winnt\system32\drivers\netdetect.sys			
	Kernel Driver	False	Manual	Stopped	
	OK	Normal	False	False	
npfs	Npfs	c:\winnt\system32\drivers\npfs.sys			
	File System Driver	True	System	Running	
	OK	Normal	False	True	
ntfs	Ntfs	c:\winnt\system32\drivers\ntfs.sys			
	File System Driver	True	Disabled	Running	
	OK	Normal	False	True	
null	Null	c:\winnt\system32\drivers\null.sys			
	Kernel Driver	True	System	Running	
	OK	Normal	False	True	
nwlnkfit	IPX Traffic Filter Driver				
	c:\winnt\system32\drivers\nwlnkfit.sys		Kernel		
Driver	False	Manual	Stopped	OK	Normal
	False	False			
nwlnkfd	IPX Traffic Forwarder Driver				
	c:\winnt\system32\drivers\nwlnkfd.sys		Kernel		
Driver	False	Manual	Stopped	OK	Normal
	False	False			
parallel	Parallel	c:\winnt\system32\drivers\parallel.sys			
	Kernel Driver	False	Auto	Stopped	
	OK	Ignore	False	False	
parport	Parport	c:\winnt\system32\drivers\parport.sys			
	Kernel Driver	False	Auto	Stopped	
	OK	Ignore	False	False	
partmgr	PartMgr	c:\winnt\system32\drivers\partmgr.sys			
	Kernel Driver	True	Boot	Running	
	OK	Normal	False	True	
parvdm	ParVdm	c:\winnt\system32\drivers\parvdm.sys			
	Kernel Driver	False	Auto	Stopped	
	OK	Ignore	False	False	
pci	PCI Bus Driver				
	c:\winnt\system32\drivers\pci.sys		Kernel		
Driver	True	Boot	Running	OK	Critical
	False	True			
pcidump	PCIDump	Not Available	Kernel Driver		
	False	System	Stopped	OK	Ignore
	False	False			
pciide	PCIIde	c:\winnt\system32\drivers\pciide.sys			
	Kernel Driver	True	Boot	Running	
	OK	Normal	False	True	
pcmcia	Pcmcia	c:\winnt\system32\drivers\pcmcia.sys			
	Kernel Driver	False	Disabled	Stopped	
	OK	Normal	False	False	
pdcomp	PDCOMP	Not Available	Kernel Driver		
	False	Manual	Stopped	OK	Ignore
	False	False			
pdframe	PDFRAME	Not Available	Kernel Driver		
	False	Manual	Stopped	OK	Ignore
	False	False			
pdreli	PDRELI	Not Available	Kernel Driver		
	False	Manual	Stopped	OK	Ignore
	False	False			

pdframe	PDFRAME	Not Available	Kernel Driver		
Driver	False	Manual	Stopped	OK	Ignore
	False	False			
pptpminiport	WAN Miniport (PPTP)				
	c:\winnt\system32\drivers\rasppptp.sys		Kernel		
Driver	True	Manual	Running	OK	Normal
	False	True			
ptlink	Direct Parallel Link Driver				
	c:\winnt\system32\drivers\ptlink.sys		Kernel		
Driver	True	Manual	Running	OK	Normal
	False	True			
ql1080	ql1080	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
ql10wnt	Ql10wnt	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
ql1240	ql1240	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
ql2100	ql2100	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
ql2300	ql2300	c:\winnt\system32\drivers\ql2300.sys			
	Kernel Driver	True	Boot	Running	
	OK	Normal	False	True	
qlvika	qlvika	c:\winnt\system32\drivers\qlvika.sys			
	Kernel Driver	True	Auto	Running	
	OK	Normal	False	True	
rasacd	Remote Access Auto Connection Driver				
	c:\winnt\system32\drivers\rasacd.sys		Kernel		
Driver	True	System	Running	OK	Normal
	False	True			
rasl2tp	WAN Miniport (L2TP)				
	c:\winnt\system32\drivers\rasl2tp.sys		Kernel		
Driver	True	Manual	Running	OK	Normal
	False	True			
raspti	Direct Parallel				
	c:\winnt\system32\drivers\raspti.sys		Kernel		
Driver	True	Manual	Running	OK	Normal
	False	True			
rca	Microsoft Streaming Network Raw Channel Access				
	c:\winnt\system32\drivers\rca.sys		Kernel		
Driver	False	Manual	Stopped	OK	Normal
	False	False			
rdbss	Rdbss	c:\winnt\system32\drivers\rdbss.sys			
	File System Driver	True	System	Running	
	OK	Normal	False	True	
rdpwd	RDPWD	c:\winnt\system32\drivers\rdpwd.sys			
	Kernel Driver	False	Manual	Stopped	
	OK	Ignore	False	False	
redbook	Digital CD Audio Playback Filter Driver				
	c:\winnt\system32\drivers\redbook.sys		Kernel		
Driver	False	System	Stopped	OK	Normal
	False	False			
serenum	Serenum Filter Driver				
	c:\winnt\system32\drivers\serenum.sys		Kernel		
Driver	True	Manual	Running	OK	Normal
	False	True			
serial	Serial port driver				
	c:\winnt\system32\drivers\serial.sys		Kernel		

Driver	True	System	Running	OK	Ignore
	False	True			
sfloppy	Sfloppy	c:\winnt\system32\drivers\sfloppy.sys			
	Kernel Driver	False	System	Stopped	
	OK	Ignore	False	False	
sglfb	sglfb	Not Available	Kernel Driver		
	False	System	Stopped	OK	Normal
	False	False			
simbad	Simbad	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
sparrow	Sparrow	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
spud	Special Purpose Utility Driver				
	c:\winnt\system32\drivers\spud.sys				Kernel
Driver	True	Manual	Running	OK	Normal
	False	True			
srv	Srv	c:\winnt\system32\drivers\srv.sys			
	File System Driver	True	Manual	Running	
	OK	Normal	False	True	
swenum	Software Bus Driver				
	c:\winnt\system32\drivers\swenum.sys				Kernel
Driver	True	Manual	Running	OK	Normal
	False	True			
symc810	symc810	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
symc8xx	symc8xx	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
sym_hi	sym_hi	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
tcPIP	TCP/IP Protocol Driver				
	c:\winnt\system32\drivers\tcpip.sys				Kernel
Driver	True	System	Running	OK	Normal
	False	True			
tdasync	TDASYNC	c:\winnt\system32\drivers\tdasync.sys			
	Kernel Driver	False	Manual	Stopped	
	OK	Ignore	False	False	
tdipx	TDIPX	c:\winnt\system32\drivers\tdipx.sys			
	Kernel Driver	False	Manual	Stopped	
	OK	Ignore	False	False	
tdnetb	TDNETB	c:\winnt\system32\drivers\tdnetb.sys			
	Kernel Driver	False	Manual	Stopped	
	OK	Ignore	False	False	
tdpipe	TDPIPE	c:\winnt\system32\drivers\tdpipe.sys			
	Kernel Driver	False	Manual	Stopped	
	OK	Ignore	False	False	
tdspX	TDSPX	c:\winnt\system32\drivers\tdspX.sys			
	Kernel Driver	False	Manual	Stopped	
	OK	Ignore	False	False	
tdtcp	TDTCP	c:\winnt\system32\drivers\tdtcp.sys			
	Kernel Driver	False	Manual	Stopped	
	OK	Ignore	False	False	
termdd	Terminal Device Driver				
	c:\winnt\system32\drivers\termdd.sys				Kernel
Driver	False	Disabled	Stopped	OK	Normal
	False	False			
tga	tga	Not Available	Kernel Driver		

	False	System	Stopped	OK	Ignore
	False	False			
udfs	Udfs	c:\winnt\system32\drivers\udfs.sys			
	File System Driver	False	Disabled	Stopped	
	OK	Normal	False	False	
uhcd	Microsoft USB Universal Host Controller Driver				
	c:\winnt\system32\drivers\uhcd.sys				Kernel
Driver	True	Manual	Running	OK	Normal
	False	True			
ultra66	ultra66	Not Available	Kernel Driver		
	False	Disabled	Stopped	OK	Normal
	False	False			
update	Microcode Update Driver				
	c:\winnt\system32\drivers\update.sys				Kernel
Driver	True	Manual	Running	OK	Normal
	False	True			
usbhub	Microsoft USB Standard Hub Driver				
	c:\winnt\system32\drivers\usbhub.sys				Kernel
Driver	True	Manual	Running	OK	Normal
	False	True			
vgasave	VgaSave	c:\winnt\system32\drivers\vga.sys			
	Kernel Driver	True	System	Running	
	OK	Ignore	False	True	
wanarp	Remote Access IP ARP Driver				
	c:\winnt\system32\drivers\wanarp.sys				Kernel
Driver	True	Manual	Running	OK	Normal
	False	True			
wdica	WDICA	Not Available	Kernel Driver		
	False	Manual	Stopped	OK	Ignore
	False	False			

[Environment Variables]

Variable	Value	User Name
ComSpec	%SystemRoot%\system32\cmd.exe	
	<SYSTEM>	
Os2LibPath	%SystemRoot%\system32\os2dll;	
	<SYSTEM>	
Path	%SystemRoot%\system32;%SystemRoot%;%SystemR	
	oot%\System32\Wbem;C:\Program Files\Microsoft SQL	
	Server\80\Tools\BINN<SYSTEM>	
windir	%SystemRoot%	<SYSTEM>
OS	Windows_NT	<SYSTEM>
PROCESSOR_ARCHITECTURE	x86	<SYSTEM>
PROCESSOR_LEVEL	15	<SYSTEM>
PROCESSOR_IDENTIFIER	x86 Family 15 Model 2 Stepping	
	4, GenuineIntel	<SYSTEM>
PROCESSOR_REVISION	0204	<SYSTEM>
NUMBER_OF_PROCESSORS	4	<SYSTEM>
PATHEXT	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WS	
	<SYSTEM>	
H	%SystemRoot%\TEMP	<SYSTEM>
TEMP	%SystemRoot%\TEMP	<SYSTEM>
TMP	%USERPROFILE%\Local Settings\Temp	
	ACL03\Administrator	
TMP	%USERPROFILE%\Local Settings\Temp	
	ACL03\Administrator	

[Jobs]

[Following are sub-categories of this main category]

[Print]

Document Size	Owner	Notify	Status	Time
Submitted Start Time	Until Time	Elapsed Time	Parameters	Pages
Printed Job ID	Priority	Host Print Queue	Driver	Driver
Name	Print Processor	Name	Data Type	

No print jobs

[Network Connections]

Local Name	Remote Name	Type	Status
E:	\\rte03\c\$	Disk	OK
	ACL03\Administrator		

[Running Tasks]

Name	Path	Process ID	Priority	Min
Working Set	Max Working Set	Start Time	Version	
Size	File Date			
system idle process	Not Available	0	0	
	Not Available	Not Available	Not Available	Not Available
Available	Unknown	Unknown	Unknown	
system	Not Available	8	8	0
	1413120	Not Available	Unknown	Unknown
	Unknown			
smss.exe	c:\winnt\system32\smss.exe	172	11	
	204800	1413120	2/19/2003 1:13:39 AM	
	5.00.2195.2901	44.27 KB (45,328 bytes)		
	12/8/1999 5:00:00 AM			
csrss.exe	Not Available	200	13	Not Available
Available	Not Available	2/19/2003 1:13:43 AM	Unknown	
	Unknown	Unknown		
winlogon.exe	c:\winnt\system32\winlogon.exe	196		
	13	204800	1413120	2/19/2003 1:13:45 AM
	5.00.2195.2953	173.77 KB (177,936 bytes)		
	12/8/1999 5:00:00 AM			
services.exe	c:\winnt\system32\services.exe	248		
	9	204800	1413120	2/19/2003 1:13:46 AM
	5.00.2195.2780	86.77 KB (88,848 bytes)		
	12/8/1999 5:00:00 AM			
lsass.exe	c:\winnt\system32\lsass.exe	260	9	
	204800	1413120	2/19/2003 1:13:46 AM	
	5.00.2195.2964	32.77 KB (33,552 bytes)		
	12/8/1999 5:00:00 AM			
svchost.exe	c:\winnt\system32\svchost.exe	432		
	8	204800	1413120	2/19/2003 1:13:48 AM
	5.00.2134.1	7.77 KB (7,952 bytes)		12/8/1999
	5:00:00 AM			
spoolsv.exe	c:\winnt\system32\spoolsv.exe	464		
	8	204800	1413120	2/19/2003 1:13:48 AM
	5.00.2161.1	43.77 KB (44,816 bytes)		
	1/8/2003 12:23:51 AM			
msdtc.exe	c:\winnt\system32\msdtc.exe	492	8	
	204800	1413120	2/19/2003 1:13:48 AM	
	1999.9.3421.3	6.77 KB (6,928 bytes)		1/8/2003

```

12:31:15 AM
svchost.exe c:\winnt\system32\svchost.exe 656
8 204800 1413120 2/19/2003 1:13:49 AM
5.00.2134.1 7.77 KB (7,952 bytes) 12/8/1999
5:00:00 AM
llssrv.exe c:\winnt\system32\llssrv.exe 676 9
204800 1413120 2/19/2003 1:13:49 AM
5.00.2195.2649 114.27 KB (117,008 bytes)
5/4/2001 12:05:02 PM
regsvcs.exe c:\winnt\system32\regsvcs.exe 732
8 204800 1413120 2/19/2003 1:13:50 AM
5.00.2195.2104 65.27 KB (66,832 bytes)
1/7/2003 3:51:05 PM
rsys.exe Not Available 812 8 Not
Available Not Available 2/19/2003 1:13:52 AM Unknown
Unknown Unknown
mstask.exe c:\winnt\system32\mstask.exe 848
8 204800 1413120 2/19/2003 1:14:01 AM
4.71.2195.1 115.27 KB (118,032 bytes)
1/7/2003 3:50:57 PM
winmgmt.exe c:\winnt\system32\wbem\winmgmt.exe
888 8 204800 1413120 2/19/2003
1:14:01 AM 1.50.1085.0029 192.08 KB (196,685
bytes) 1/7/2003 3:51:16 PM
inetinfo.exe c:\winnt\system32\inet\inetinfo.exe
928 8 204800 1413120 2/19/2003
1:14:01 AM 5.00.0984 14.27 KB (14,608 bytes)
1/7/2003 3:52:17 PM
dfssvc.exe c:\winnt\system32\dfssvc.exe 976 8
204800 1413120 2/19/2003 1:14:02 AM
5.00.2195.2841 88.27 KB (90,384 bytes)
1/7/2003 3:50:44 PM
svchost.exe c:\winnt\system32\svchost.exe 1204
8 204800 1413120 2/19/2003 1:14:50 AM
5.00.2134.1 7.77 KB (7,952 bytes) 12/8/1999
5:00:00 AM
explorer.exe c:\winnt\explorer.exe 1352 8
204800 1413120 2/19/2003 1:29:12 AM
5.00.3315.2846 237.27 KB (242,960 bytes)
1/7/2003 3:51:11 PM
cmd.exe c:\winnt\system32\cmd.exe 1060 8
204800 1413120 2/19/2003 1:29:14 AM
5.00.2195.2301 230.77 KB (236,304 bytes)
12/8/1999 5:00:00 AM
dllhost.exe Not Available 740 8
Not Available Not Available 2/19/2003
1:39:40 AM Unknown Unknown Unknown
mmc.exe c:\winnt\system32\mmc.exe 9460 8
204800 1413120 2/19/2003 3:54:02 AM
5.00.2195.2301 589.27 KB (603,408 bytes)
1/7/2003 3:50:52 PM
mdm.exe c:\winnt\system32\mdm.exe 9488 8
204800 1413120 2/19/2003 3:56:38 AM 6.00.8424
121.29 KB (124,200 bytes) 1/8/2003 12:33:12 AM
rsvp.exe c:\winnt\system32\rsvp.exe 9664 8
204800 1413120 2/19/2003 3:57:35 AM
5.00.2167.1 172.77 KB (176,912 bytes)
12/8/1999 5:00:00 AM

```

[Loaded Modules]

```

Name Version Size File Date Manufacturer
Path
traffic.dll 5.00.2139.1 30.77 KB (31,504 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\traffic.dll
rsvp.exe 5.00.2167.1 172.77 KB (176,912 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\rsvp.exe
mdm.exe 6.00.8424 121.29 KB (124,200 bytes) 1/8/2003
12:33:12 AM Microsoft Corporation
c:\winnt\system32\mdm.exe
wbemprox.dll 1.50.1085.0045 40.08 KB (41,040
bytes) 1/7/2003 3:51:15 PM Microsoft Corporation
c:\winnt\system32\wbem\wbemprox.dll
cabinet.dll 5.00.2147.1 54.77 KB (56,080 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\cabinet.dll
msinfo32.dll 5.00.2177.1 312.27 KB (319,760
bytes) 1/7/2003 3:35:23 PM Microsoft Corporation
c:\program files\common files\microsoft
shared\msinfo\msinfo32.dll
mmcndmgr.dll 5.00.2178.1 815.27 KB (834,832
bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\mmcndmgr.dll
mmc.exe 5.00.2195.2301 589.27 KB (603,408 bytes)
1/7/2003 3:50:52 PM Microsoft Corporation
c:\winnt\system32\mmc.exe
cmd.exe 5.00.2195.2104 230.77 KB (236,304 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\cmd.exe
dskquota.dll 5.00.2195.2927 90.77 KB (92,944
bytes) 1/7/2003 3:50:45 PM Microsoft Corporation
c:\winnt\system32\dskquota.dll
dskquoui.dll 5.00.2195.2927 142.77 KB (146,192
bytes) 1/7/2003 3:50:46 PM Microsoft Corporation
c:\winnt\system32\dskquoui.dll
diskcopy.dll 5.00.2134.1 15.77 KB (16,144
bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\diskcopy.dll
imgutil.dll 5.00.3315.2870 30.77 KB (31,504 bytes)
1/7/2003 3:50:49 PM Microsoft Corporation
c:\winnt\system32\imgutil.dll
webvw.dll 5.00.2920.0000 1.06 MB (1,115,408 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\webvw.dll
msls31.dll 3.10.337.0 145.27 KB (148,752 bytes) 12/8/1999
5:00:00 AM Microsoft Corporation
c:\winnt\system32\msls31.dll
msdbg.dll 6.00.8424 67.50 KB (69,120 bytes) 1/8/2003
12:33:12 AM Microsoft Corporation
c:\winnt\system32\msdbg.dll
shdoclc.dll 5.00.3315.2879 324.50 KB (332,288
bytes) 1/7/2003 3:51:06 PM Microsoft Corporation
c:\winnt\system32\shdoclc.dll
pdm.dll 6.00.8424 179.27 KB (183,574 bytes) 1/8/2003
12:33:12 AM Microsoft Corporation
c:\winnt\system32\pdm.dll
mshtml.dll 5.00.3315.2870 2.24 MB (2,345,232 bytes)
1/7/2003 3:50:53 PM Microsoft Corporation
c:\winnt\system32\mshtml.dll
mlang.dll 5.00.3103.1000 510.77 KB (523,024 bytes)

```

```

1/7/2003 3:50:51 PM Microsoft Corporation
c:\winnt\system32\mlang.dll
urlmon.dll 5.00.3315.1000 441.27 KB (451,856 bytes)
1/7/2003 3:51:09 PM Microsoft Corporation
c:\winnt\system32\urlmon.dll
browseic.dll 5.00.3315.2846 34.50 KB (35,328
bytes) 1/7/2003 3:50:40 PM Microsoft Corporation
c:\winnt\system32\browseic.dll
linkinfo.dll 5.00.2134.1 15.77 KB (16,144 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\linkinfo.dll
msi.dll 2.0.2600.0 1.90 MB (1,991,168 bytes) 1/7/2003
3:50:54 PM Microsoft Corporation
c:\winnt\system32\msi.dll
wininet.dll 5.00.3315.1000 456.77 KB (467,728 bytes)
1/7/2003 3:51:10 PM Microsoft Corporation
c:\winnt\system32\wininet.dll
powrprof.dll 5.00.3103.1000 13.27 KB (13,584
bytes) 1/7/2003 3:51:03 PM Microsoft Corporation
c:\winnt\system32\powrprof.dll
batmeter.dll 5.00.3103.1000 20.27 KB (20,752
bytes) 1/7/2003 3:50:40 PM Microsoft Corporation
c:\winnt\system32\batmeter.dll
stobject.dll 5.00.2195.2780 79.27 KB (81,168
bytes) 1/7/2003 3:51:08 PM Microsoft Corporation
c:\winnt\system32\stobject.dll
webcheck.dll 5.00.3315.1000 251.77 KB (257,808
bytes) 1/7/2003 3:51:10 PM Microsoft Corporation
c:\winnt\system32\webcheck.dll
ntshrui.dll 5.00.2134.1 46.77 KB (47,888 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\ntshrui.dll
mydocs.dll 5.00.2920.0000 55.77 KB (57,104
bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\mydocs.dll
browseui.dll 5.00.3315.2846 788.77 KB (807,696
bytes) 1/7/2003 3:50:41 PM Microsoft Corporation
c:\winnt\system32\browseui.dll
shdocvw.dll 5.00.3315.2879 1.05 MB (1,104,144
bytes) 1/7/2003 3:51:06 PM Microsoft Corporation
c:\winnt\system32\shdocvw.dll
explorer.exe 5.00.3315.2846 237.27 KB (242,960
bytes) 1/7/2003 3:51:11 PM Microsoft Corporation
c:\winnt\explorer.exe
tapisrv.dll 5.00.2195.2955 169.27 KB (173,328 bytes)
1/7/2003 3:51:08 PM Microsoft Corporation
c:\winnt\system32\tapisrv.dll
dfssvc.exe 5.00.2195.2841 88.27 KB (90,384 bytes)
1/7/2003 3:50:44 PM Microsoft Corporation
c:\winnt\system32\dfssvc.exe
tpcc_com_all.dll 1, 0, 0, 1 80.00 KB (81,920 bytes)
1/8/2003 3:40:13 PM
c:\inetpub\wwwroot\tpcc_c~2.dll
qlvipl.dll Not Available 92.05 KB (94,262 bytes)
2/3/2003 6:04:24 PM Not Available
c:\winnt\system32\qlvipl.dll
dbmsqlgc.dll 2000.080.0760.00 32.56 KB (33,340
bytes) 1/29/2003 6:56:59 PM Microsoft Corporation
c:\winnt\system32\dbmsqlgc.dll
dbnetlib.dll 2000.081.9031 60.00 KB (61,440
bytes) 9/27/2002 11:22:44 AM Microsoft

```

Corporation c:\winnt\system32\dbnetlib.dll
ntwdblib.dll 2000.080.0194.00 268.06 KB (274,489 bytes) 1/8/2003 3:38:25 PM Microsoft Corporation
c:\winnt\system32\ntwdblib.dll
tpcc_dblib.dll Not Available 28.00 KB (28,672 bytes) 1/8/2003 3:40:11 PM Not Available
c:\inetpub\wwwroot\tpcc_dblib.dll
odbcint.dll 3.520.9001.0 88.00 KB (90,112 bytes) 1/29/2003 6:56:49 PM Microsoft Corporation
c:\winnt\system32\odbcint.dll
odbc32.dll 3.520.9030.0 196.00 KB (200,704 bytes) 1/29/2003 6:56:49 PM Microsoft Corporation
c:\winnt\system32\odbc32.dll
comsvcs.dll 2000.2.3471.1 1.35 MB (1,417,488 bytes) 1/7/2003 3:50:42 PM Microsoft Corporation
c:\winnt\system32\comsvcs.dll
ntfsdrv.dll 5.00.0984 36.77 KB (37,648 bytes) 1/7/2003 3:52:18 PM Microsoft Corporation
c:\winnt\system32\inetrv\ntfsdrv.dll
aqueue.dll 5.00.0984 312.77 KB (320,272 bytes) 1/7/2003 3:52:08 PM Microsoft Corporation
c:\winnt\system32\inetrv\aqueue.dll
seo.dll 5.00.0984 229.27 KB (234,768 bytes) 1/7/2003 3:52:18 PM Microsoft Corporation
c:\winnt\system32\inetrv\seo.dll
iscomlog.dll 5.00.0984 24.77 KB (25,360 bytes) 1/7/2003 3:52:17 PM Microsoft Corporation
c:\winnt\system32\inetrv\iscomlog.dll
lonsint.dll 5.00.0984 11.77 KB (12,048 bytes) 1/7/2003 3:52:17 PM Microsoft Corporation
c:\winnt\system32\inetrv\lonsint.dll
inetsloc.dll 5.00.0984 20.27 KB (20,752 bytes) 1/7/2003 3:50:49 PM Microsoft Corporation
c:\winnt\system32\inetsloc.dll
staxmem.dll 5.00.0984 8.27 KB (8,464 bytes) 1/8/2003 12:31:46 AM Microsoft Corporation
c:\winnt\system32\staxmem.dll
exstrace.dll 5.00.0984 13.77 KB (14,096 bytes) 1/8/2003 12:31:48 AM Microsoft Corporation
c:\winnt\system32\exstrace.dll
rwnh.dll 5.00.0984 10.77 KB (11,024 bytes) 1/8/2003 12:33:05 AM Microsoft Corporation
c:\winnt\system32\rwnh.dll
fcachdll.dll 5.00.0984 43.77 KB (44,816 bytes) 1/8/2003 12:33:04 AM Microsoft Corporation
c:\winnt\system32\fcachdll.dll
iisfecnv.dll 5.00.0984 7.27 KB (7,440 bytes) 1/8/2003 12:31:47 AM Microsoft Corporation
c:\winnt\system32\inetrv\iisfecnv.dll
isatq.dll 5.00.0984 60.27 KB (61,712 bytes) 1/7/2003 3:52:17 PM Microsoft Corporation
c:\winnt\system32\inetrv\isatq.dll
infocomm.dll 5.00.0984 238.27 KB (243,984 bytes) 1/7/2003 3:52:17 PM Microsoft Corporation
c:\winnt\system32\inetrv\infocomm.dll
smtpsvc.dll 5.00.0984 420.27 KB (430,352 bytes) 1/7/2003 3:52:18 PM Microsoft Corporation
c:\winnt\system32\inetrv\smtpsvc.dll
security.dll 5.00.2154.1 5.77 KB (5,904 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\security.dll

svcext.dll 5.00.0984 39.77 KB (40,720 bytes) 1/7/2003 3:52:18 PM Microsoft Corporation
c:\winnt\system32\inetrv\svcext.dll
admexs.dll 5.00.0984 27.77 KB (28,432 bytes) 1/7/2003 3:52:15 PM Microsoft Corporation
c:\winnt\system32\inetrv\admexs.dll
wamreg.dll 5.00.0984 45.77 KB (46,864 bytes) 1/7/2003 3:52:19 PM Microsoft Corporation
c:\winnt\system32\inetrv\wamreg.dll
metadata.dll 5.00.0984 68.77 KB (70,416 bytes) 1/7/2003 3:52:18 PM Microsoft Corporation
c:\winnt\system32\inetrv\metadata.dll
iismap.dll 5.00.0984 55.77 KB (57,104 bytes) 1/7/2003 3:50:48 PM Microsoft Corporation
c:\winnt\system32\iismap.dll
nsepm.dll 5.00.0984 43.27 KB (44,304 bytes) 1/7/2003 3:52:18 PM Microsoft Corporation
c:\winnt\system32\inetrv\nsepm.dll
admwprox.dll 5.00.0984 31.77 KB (32,528 bytes) 1/8/2003 12:31:48 AM Microsoft Corporation
c:\winnt\system32\admwprox.dll
coadmin.dll 5.00.0984 39.27 KB (40,208 bytes) 1/7/2003 3:52:16 PM Microsoft Corporation
c:\winnt\system32\inetrv\coadmin.dll
iisadmin.dll 5.00.0984 15.27 KB (15,632 bytes) 1/7/2003 3:52:16 PM Microsoft Corporation
c:\winnt\system32\inetrv\iisadmin.dll
rpref.dll 5.00.0984 4.27 KB (4,368 bytes) 1/7/2003 3:52:18 PM Microsoft Corporation
c:\winnt\system32\inetrv\rpref.dll
iisrtl.dll 5.00.0984 119.77 KB (122,640 bytes) 1/7/2003 3:50:48 PM Microsoft Corporation
c:\winnt\system32\iisrtl.dll
inetinfo.exe 5.00.0984 14.27 KB (14,608 bytes) 1/7/2003 3:52:17 PM Microsoft Corporation
c:\winnt\system32\inetrv\inetinfo.exe
perfos.dll 5.00.2155.1 21.27 KB (21,776 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\perfos.dll
wshnetbs.dll 5.00.2134.1 7.77 KB (7,952 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\wshnetbs.dll
ntmarta.dll 5.00.2195.2862 98.77 KB (101,136 bytes) 1/7/2003 3:51:00 PM Microsoft Corporation
c:\winnt\system32\ntmarta.dll
provthrd.dll 1.50.1085.0000 68.07 KB (69,708 bytes) 1/7/2003 3:35:15 PM Microsoft Corporation
c:\winnt\system32\wbem\provthrd.dll
ntevt.dll 1.50.1085.0000 192.06 KB (196,669 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\wbem\ntevt.dll
psapi.dll 5.00.2134.1 28.27 KB (28,944 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\psapi.dll
framedyn.dll 1.50.1085.0000 164.05 KB (167,992 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\wbem\framedyn.dll
cimwin32.dll 1.50.1085.0038 1.02 MB (1,073,232 bytes) 1/7/2003 3:51:14 PM Microsoft Corporation
c:\winnt\system32\wbem\cimwin32.dll
wbemsvc.dll 1.50.1085.0007 40.07 KB (41,036

bytes) 1/7/2003 3:51:15 PM Microsoft Corporation
c:\winnt\system32\wbem\wbemsvc.dll
wbemess.dll 1.50.1085.0039 364.07 KB (372,804 bytes) 1/7/2003 3:51:15 PM Microsoft Corporation
c:\winnt\system32\wbem\wbemess.dll
fastprox.dll 1.50.1085.0037 144.08 KB (147,536 bytes) 1/7/2003 3:51:14 PM Microsoft Corporation
c:\winnt\system32\wbem\fastprox.dll
wbemcore.dll 1.50.1085.0036 628.07 KB (643,140 bytes) 1/7/2003 3:51:15 PM Microsoft Corporation
c:\winnt\system32\wbem\wbemcore.dll
wbemcomn.dll 1.50.1085.0021 692.07 KB (708,675 bytes) 1/7/2003 3:51:15 PM Microsoft Corporation
c:\winnt\system32\wbem\wbemcomn.dll
winmgmt.exe 1.50.1085.0029 192.08 KB (196,685 bytes) 1/7/2003 3:51:16 PM Microsoft Corporation
c:\winnt\system32\wbem\winmgmt.exe
msidle.dll 5.00.2920.0000 6.27 KB (6,416 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\msidle.dll
mstask.exe 4.71.2195.1 115.27 KB (118,032 bytes) 1/7/2003 3:50:57 PM Microsoft Corporation
c:\winnt\system32\mstask.exe
regsvc.exe 5.00.2195.2104 65.27 KB (66,832 bytes) 1/7/2003 3:51:05 PM Microsoft Corporation
c:\winnt\system32\regsvc.exe
llsrpc.dll 5.00.2149.1 45.77 KB (46,864 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\llsrpc.dll
llsrv.exe 5.00.2195.2649 114.27 KB (117,008 bytes) 5/4/2001 12:05:02 PM Microsoft Corporation
c:\winnt\system32\llsrv.exe
wmi.dll 5.00.2191.1 6.27 KB (6,416 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\wmi.dll
netshell.dll 5.00.2195.2779 457.27 KB (468,240 bytes) 1/7/2003 3:50:59 PM Microsoft Corporation
c:\winnt\system32\netshell.dll
netman.dll 5.00.2195.2779 89.27 KB (91,408 bytes) 1/7/2003 3:50:59 PM Microsoft Corporation
c:\winnt\system32\netman.dll
rasdlg.dll 5.00.2195.2671 514.27 KB (526,608 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\rasdlg.dll
netcfgx.dll 5.00.2195.2228 534.77 KB (547,600 bytes) 1/7/2003 3:50:59 PM Microsoft Corporation
c:\winnt\system32\netcfgx.dll
rasmans.dll 5.00.2195.2728 147.27 KB (150,800 bytes) 1/7/2003 3:51:04 PM Microsoft Corporation
c:\winnt\system32\rasmans.dll
ntmsdba.dll 5.00.2195.2779 167.27 KB (171,280 bytes) 1/7/2003 3:51:00 PM Microsoft Corporation
c:\winnt\system32\ntmsdba.dll
sens.dll 5.00.2163.1 36.77 KB (37,648 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\sens.dll
ntmssvc.dll 5.00.2195.2779 391.27 KB (400,656 bytes) 1/7/2003 3:51:00 PM Microsoft Corporation
c:\winnt\system32\ntmssvc.dll
es.dll 2000.2.3471.1 222.27 KB (227,600 bytes) 1/7/2003 3:50:46 PM Microsoft Corporation

c:\winnt\system32\es.dll
 mtxoci.dll 2000.2.3471.1 101.77 KB (104,208 bytes)
 1/7/2003 3:50:58 PM Microsoft Corporation
 c:\winnt\system32\mtxoci.dll
 resutils.dll 5.00.2195.2787 39.77 KB (40,720 bytes)
 1/7/2003 3:51:05 PM Microsoft Corporation
 c:\winnt\system32\resutils.dll
 clusapi.dll 5.00.2195.2104 54.27 KB (55,568 bytes)
 1/7/2003 3:50:42 PM Microsoft Corporation
 c:\winnt\system32\clusapi.dll
 msvcp50.dll 5.00.7051 552.50 KB (565,760 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\msvcp50.dll
 xolehlp.dll 1999.9.3421.3 17.27 KB (17,680 bytes)
 1/8/2003 12:31:15 AM Microsoft Corporation
 c:\winnt\system32\xolehlp.dll
 msdtclog.dll 1999.9.3421.3 89.77 KB (91,920 bytes)
 1/8/2003 12:31:15 AM Microsoft Corporation
 c:\winnt\system32\msdtclog.dll
 mtxclu.dll 2000.2.3471.1 51.27 KB (52,496 bytes)
 1/7/2003 3:50:58 PM Microsoft Corporation
 c:\winnt\system32\mtxclu.dll
 msdtcprx.dll 2000.2.3471.1 665.77 KB (681,744 bytes)
 1/7/2003 3:50:52 PM Microsoft Corporation
 c:\winnt\system32\msdtcprx.dll
 txfaux.dll 2000.2.3471.1 374.27 KB (383,248 bytes)
 1/7/2003 3:51:09 PM Microsoft Corporation
 c:\winnt\system32\txfaux.dll
 msdtctm.dll 2000.2.3471.1 1.07 MB (1,120,528 bytes)
 1/7/2003 3:50:53 PM Microsoft Corporation
 c:\winnt\system32\msdtctm.dll
 msdtc.exe 1999.9.3421.3 6.77 KB (6,928 bytes) 1/8/2003 12:31:15 AM Microsoft Corporation
 c:\winnt\system32\msdtc.exe
 inetpp.dll 5.00.2195.2842 65.27 KB (66,832 bytes)
 1/7/2003 3:50:49 PM Microsoft Corporation
 c:\winnt\system32\inetpp.dll
 win32spl.dll 5.00.2195.2780 92.27 KB (94,480 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\win32spl.dll
 usbmon.dll 5.00.2195.2780 11.27 KB (11,536 bytes)
 1/7/2003 3:51:09 PM Microsoft Corporation
 c:\winnt\system32\usbmon.dll
 tcpmon.dll 5.00.2195.2780 40.77 KB (41,744 bytes)
 1/7/2003 3:51:08 PM Microsoft Corporation
 c:\winnt\system32\tcpmon.dll
 pjimon.dll 5.00.2165.1 12.77 KB (13,072 bytes)
 12/1/1999 8:39:36 AM Microsoft Corporation
 c:\winnt\system32\pjimon.dll
 cnbjmon.dll 5.00.2134.1 43.77 KB (44,816 bytes)
 12/1/1999 8:38:48 AM Microsoft Corporation
 c:\winnt\system32\cnbjmon.dll
 localspl.dll 5.00.2195.2793 246.77 KB (252,688 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\localspl.dll
 spoolss.dll 5.00.2161.1 61.77 KB (63,248 bytes)
 1/8/2003 12:23:51 AM Microsoft Corporation
 c:\winnt\system32\spoolss.dll
 spoolsv.exe 5.00.2161.1 43.77 KB (44,816 bytes)
 1/8/2003 12:23:51 AM Microsoft Corporation
 c:\winnt\system32\spoolsv.exe

rpcss.dll 5.00.2195.2815 231.27 KB (236,816 bytes)
 1/7/2003 3:51:05 PM Microsoft Corporation
 c:\winnt\system32\rpcss.dll
 svchost.exe 5.00.2134.1 7.77 KB (7,952 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\svchost.exe
 dssenh.dll 5.00.2195.2228 142.77 KB (146,192 bytes)
 1/7/2003 3:52:11 PM Microsoft Corporation
 c:\winnt\system32\dssenh.dll
 oakley.dll 5.00.2195.2785 378.77 KB (387,856 bytes)
 1/7/2003 3:51:00 PM Microsoft Corporation
 c:\winnt\system32\oakley.dll
 mfc42u.dll 6.00.8665.0 972.05 KB (995,384 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\mfc42u.dll
 polagent.dll 5.00.2183.1 108.27 KB (110,864 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\polagent.dll
 scecli.dll 5.00.2195.2780 105.27 KB (107,792 bytes)
 1/7/2003 3:51:05 PM Microsoft Corporation
 c:\winnt\system32\scecli.dll
 atl.dll 3.00.8449 57.56 KB (58,938 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\atl.dll
 certcli.dll 5.00.2195.2778 130.77 KB (133,904 bytes)
 1/7/2003 3:50:42 PM Microsoft Corporation
 c:\winnt\system32\certcli.dll
 esent.dll 6.0.3940.13 1.08 MB (1,135,376 bytes)
 1/7/2003 3:50:46 PM Microsoft Corporation
 c:\winnt\system32\esent.dll
 ntdsatq.dll 5.00.2195.2878 31.27 KB (32,016 bytes)
 1/7/2003 3:51:00 PM Microsoft Corporation
 c:\winnt\system32\ntdsatq.dll
 ntdsa.dll 5.00.2195.2899 990.77 KB (1,014,544 bytes)
 1/7/2003 3:50:59 PM Microsoft Corporation
 c:\winnt\system32\ntdsa.dll
 kdcsvc.dll 5.00.2195.2878 137.77 KB (141,072 bytes)
 1/7/2003 3:50:51 PM Microsoft Corporation
 c:\winnt\system32\kdcsvc.dll
 sfmapi.dll 5.00.2134.1 38.77 KB (39,696 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\sfmapi.dll
 rassfm.dll 5.00.2195.2671 21.27 KB (21,776 bytes)
 1/7/2003 3:51:04 PM Microsoft Corporation
 c:\winnt\system32\rassfm.dll
 rsabase.dll 5.00.2195.2228 128.27 KB (131,344 bytes)
 5/4/2001 12:05:02 PM Microsoft Corporation
 c:\winnt\system32\rsabase.dll
 schannel.dll 5.00.2195.2922 138.27 KB (141,584 bytes)
 5/4/2001 12:05:02 PM Microsoft Corporation
 c:\winnt\system32\schannel.dll
 netlogon.dll 5.00.2195.2865 357.77 KB (366,352 bytes)
 1/7/2003 3:50:59 PM Microsoft Corporation
 c:\winnt\system32\netlogon.dll
 kerberos.dll 5.00.2195.2913 198.77 KB (203,536 bytes)
 1/7/2003 3:50:51 PM Microsoft Corporation
 c:\winnt\system32\kerberos.dll
 msprivs.dll 5.00.2154.1 41.50 KB (42,496 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\msprivs.dll
 samsrv.dll 5.00.2195.2918 369.77 KB (378,640 bytes)

12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\samsrv.dll
 lsasrv.dll 5.00.2195.2964 492.77 KB (504,592 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\lsasrv.dll
 lsass.exe 5.00.2195.2964 32.77 KB (33,552 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\lsass.exe
 ntlisapi.dll 5.00.2134.1 6.77 KB (6,928 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\ntlisapi.dll
 xactsrv.dll 5.00.2134.1 90.27 KB (92,432 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\xactsrv.dll
 wmicore.dll 5.00.2195.2842 72.27 KB (74,000 bytes)
 1/7/2003 3:51:11 PM Microsoft Corporation
 c:\winnt\system32\wmicore.dll
 rasadhlp.dll 5.00.2168.1 7.27 KB (7,440 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\rasadhlp.dll
 winnr.dll 5.00.2160.1 18.77 KB (19,216 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\winnr.dll
 rnr20.dll 5.00.2195.2871 35.77 KB (36,624 bytes)
 1/7/2003 3:51:05 PM Microsoft Corporation
 c:\winnt\system32\rnr20.dll
 wshtcpip.dll 5.00.2195.2104 17.27 KB (17,680 bytes)
 1/7/2003 3:51:11 PM Microsoft Corporation
 c:\winnt\system32\wshtcpip.dll
 msafd.dll 5.00.2195.2779 106.77 KB (109,328 bytes)
 1/7/2003 3:50:52 PM Microsoft Corporation
 c:\winnt\system32\msafd.dll
 mswsock.dll 5.00.2195.2871 62.77 KB (64,272 bytes)
 1/7/2003 3:50:57 PM Microsoft Corporation
 c:\winnt\system32\mswsock.dll
 msgsvc.dll 5.00.2195.2939 34.27 KB (35,088 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\msgsvc.dll
 browser.dll 5.00.2195.2778 48.27 KB (49,424 bytes)
 1/7/2003 3:50:40 PM Microsoft Corporation
 c:\winnt\system32\browser.dll
 alrsvc.dll 5.00.2134.1 17.77 KB (18,192 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\alrsvc.dll
 trkwks.dll 5.00.2166.1 88.77 KB (90,896 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\trkwks.dll
 seclogon.dll 5.00.2135.1 15.77 KB (16,144 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\seclogon.dll
 psbase.dll 5.00.2195.2779 111.77 KB (114,448 bytes)
 1/7/2003 3:51:04 PM Microsoft Corporation
 c:\winnt\system32\psbase.dll
 cryptsvc.dll 5.00.2181.1 61.77 KB (63,248 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\cryptsvc.dll
 cryptdll.dll 5.00.2135.1 41.27 KB (42,256 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\cryptdll.dll
 wkssvc.dll 5.00.2195.2780 95.27 KB (97,552 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation

c:\winnt\system32\wkssvc.dll
 srvsvc.dll 5.00.2195.2904 79.27 KB (81,168 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\srvsvc.dll
 cfgmgr32.dll 5.00.2134.1 16.77 KB (17,168 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\cfgmgr32.dll
 dmserver.dll 2195.2778.297.3 11.77 KB (12,048 bytes)
 1/7/2003 3:50:45 PM VERITAS Software Corp.
 c:\winnt\system32\dmserver.dll
 winsta.dll 5.00.2195.2386 36.77 KB (37,648 bytes)
 1/7/2003 3:51:10 PM Microsoft Corporation
 c:\winnt\system32\winsta.dll
 lmhsvc.dll 5.00.2195.2778 9.77 KB (10,000 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\lmhsvc.dll
 dnssrslvr.dll 5.00.2195.2778 88.77 KB (90,896 bytes)
 1/7/2003 3:50:45 PM Microsoft Corporation
 c:\winnt\system32\dnssrslvr.dll
 tapi32.dll 5.00.2182.1 123.27 KB (126,224 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\tapi32.dll
 rasman.dll 5.00.2195.2780 54.77 KB (56,080 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\rasman.dll
 rasapi32.dll 5.00.2195.2671 189.77 KB (194,320 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\rasapi32.dll
 rtutils.dll 5.00.2168.1 43.77 KB (44,816 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\rtutils.dll
 adslrpc.dll 5.00.2195.2842 127.27 KB (130,320 bytes)
 1/7/2003 3:50:38 PM Microsoft Corporation
 c:\winnt\system32\adslrpc.dll
 activeds.dll 5.00.2195.2778 174.77 KB (178,960 bytes)
 1/7/2003 3:50:34 PM Microsoft Corporation
 c:\winnt\system32\activeds.dll
 mprapi.dll 5.00.2181.1 79.27 KB (81,168 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\mprapi.dll
 iphlapi.dll 5.00.2173.2 67.77 KB (69,392 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\iphlpapi.dll
 icmp.dll 5.00.2134.1 7.27 KB (7,440 bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\icmp.dll
 dhcpcsvc.dll 5.00.2195.2778 88.77 KB (90,896 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\dhcpcsvc.dll
 eventlog.dll 5.00.2178.1 43.77 KB (44,816 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\eventlog.dll
 ntdsapi.dll 5.00.2195.2661 55.77 KB (57,104 bytes)
 1/7/2003 3:50:59 PM Microsoft Corporation
 c:\winnt\system32\ntdsapi.dll
 scesrv.dll 5.00.2195.2780 226.27 KB (231,696 bytes)
 1/7/2003 3:51:06 PM Microsoft Corporation
 c:\winnt\system32\scesrv.dll
 umpnpgm.dll 5.00.2182.1 86.27 KB (88,336 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\umpnpgm.dll

services.exe 5.00.2195.2780 86.77 KB (88,848 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\services.exe
 msv1_0.dll 5.00.2195.2900 111.77 KB (114,448 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\msv1_0.dll
 clbcatq.dll 2000.2.3471.1 496.77 KB (508,688 bytes)
 1/7/2003 3:50:42 PM Microsoft Corporation
 c:\winnt\system32\clbcatq.dll
 oleaut32.dll 2.40.4517 612.27 KB (626,960 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\oleaut32.dll
 netmsg.dll 5.00.2137.1 152.50 KB (156,160 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\netmsg.dll
 comdlg32.dll 5.00.3103.1000 236.77 KB (242,448 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\comdlg32.dll
 netui2.dll 5.00.2134.1 280.27 KB (286,992 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\netui2.dll
 mprui.dll 5.00.2195.2104 54.77 KB (56,080 bytes)
 1/7/2003 3:50:52 PM Microsoft Corporation
 c:\winnt\system32\mprui.dll
 netui1.dll 5.00.2134.1 210.27 KB (215,312 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\netui1.dll
 netui0.dll 5.00.2134.1 70.27 KB (71,952 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\netui0.dll
 ntlanman.dll 5.00.2157.1 35.27 KB (36,112 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\ntlanman.dll
 mpr.dll 5.00.2195.2779 53.27 KB (54,544 bytes)
 1/7/2003 3:50:52 PM Microsoft Corporation
 c:\winnt\system32\mpr.dll
 cscui.dll 5.00.2195.2959 228.27 KB (233,744 bytes)
 1/7/2003 3:50:43 PM Microsoft Corporation
 c:\winnt\system32\cscui.dll
 winspool.drv 5.00.2195.2780 109.77 KB (112,400 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\winspool.drv
 winscard.dll 5.00.2134.1 77.27 KB (79,120 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\winscard.dll
 wlnotify.dll 5.00.2195.2780 53.77 KB (55,056 bytes)
 1/7/2003 3:51:11 PM Microsoft Corporation
 c:\winnt\system32\wlnotify.dll
 cscdll.dll 5.00.2195.2401 98.27 KB (100,624 bytes)
 1/7/2003 3:50:43 PM Microsoft Corporation
 c:\winnt\system32\cscdll.dll
 lz32.dll 5.00.2134.1 9.77 KB (10,000 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\lz32.dll
 version.dll 5.00.2134.1 15.77 KB (16,144 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\version.dll
 rsaenh.dll 5.00.2195.2228 130.77 KB (133,904 bytes)
 1/7/2003 3:52:11 PM Microsoft Corporation
 c:\winnt\system32\rsaenh.dll
 mscat32.dll 5.131.2134.1 7.77 KB (7,952 bytes)

12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\mscat32.dll
 ole32.dll 5.00.2195.2887 969.77 KB (993,040 bytes)
 1/7/2003 3:51:02 PM Microsoft Corporation
 c:\winnt\system32\ole32.dll
 imagehlp.dll 5.00.2195.2778 125.77 KB (128,784 bytes)
 5/4/2001 12:05:02 PM Microsoft Corporation
 c:\winnt\system32\imagehlp.dll
 msasn1.dll 5.00.2134.1 51.27 KB (52,496 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\msasn1.dll
 crypt32.dll 5.131.2195.2833 451.27 KB (462,096 bytes)
 1/7/2003 3:50:43 PM Microsoft Corporation
 c:\winnt\system32\crypt32.dll
 wintrust.dll 5.131.2195.2779 162.27 KB (166,160 bytes)
 1/7/2003 3:51:10 PM Microsoft Corporation
 c:\winnt\system32\wintrust.dll
 setupapi.dll 5.00.2195.2663 555.77 KB (569,104 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\setupapi.dll
 winmm.dll 5.00.2161.1 184.77 KB (189,200 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\winmm.dll
 comctl32.dll 5.81 537.77 KB (550,672 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\comctl32.dll
 shlwapi.dll 5.00.3315.1000 282.77 KB (289,552 bytes)
 1/7/2003 3:51:07 PM Microsoft Corporation
 c:\winnt\system32\shlwapi.dll
 shell32.dll 5.00.3315.2902 2.25 MB (2,359,056 bytes)
 1/7/2003 3:51:07 PM Microsoft Corporation
 c:\winnt\system32\shell32.dll
 msgina.dll 5.00.2195.2779 324.27 KB (332,048 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\msgina.dll
 wsock32.dll 5.00.2195.2871 21.27 KB (21,776 bytes)
 1/7/2003 3:51:11 PM Microsoft Corporation
 c:\winnt\system32\wsock32.dll
 dnsapi.dll 5.00.2195.2785 130.77 KB (133,904 bytes)
 1/7/2003 3:50:45 PM Microsoft Corporation
 c:\winnt\system32\dnsapi.dll
 wldap32.dll 5.00.2195.2797 125.27 KB (128,272 bytes)
 1/7/2003 3:51:11 PM Microsoft Corporation
 c:\winnt\system32\wldap32.dll
 ws2help.dll 5.00.2134.1 17.77 KB (18,192 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\ws2help.dll
 ws2_32.dll 5.00.2195.2780 67.77 KB (69,392 bytes)
 1/7/2003 3:51:11 PM Microsoft Corporation
 c:\winnt\system32\ws2_32.dll
 samlib.dll 5.00.2195.2780 49.77 KB (50,960 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\samlib.dll
 netrap.dll 5.00.2134.1 11.27 KB (11,536 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation
 c:\winnt\system32\netrap.dll
 netapi32.dll 5.00.2195.2808 303.77 KB (311,056 bytes)
 1/7/2003 3:50:58 PM Microsoft Corporation
 c:\winnt\system32\netapi32.dll
 profmap.dll 5.00.2181.1 29.27 KB (29,968 bytes)
 12/8/1999 5:00:00 AM Microsoft Corporation

```

c:\winnt\system32\profmap.dll
secur32.dll 5.00.2195.2862 46.77 KB (47,888
bytes) 1/7/2003 3:51:06 PM Microsoft Corporation
c:\winnt\system32\secur32.dll
sfc.dll 5.00.2195.2896 92.11 KB (94,320 bytes)
1/7/2003 3:51:06 PM Microsoft Corporation
c:\winnt\system32\sfc.dll
nddeapi.dll 5.00.2137.1 15.27 KB (15,632
bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\nddeapi.dll
userenv.dll 5.00.2195.2780 361.77 KB (370,448
bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\userenv.dll
user32.dll 5.00.2195.2821 392.77 KB (402,192 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\user32.dll
gdi32.dll 5.00.2195.2778 228.77 KB (234,256 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\gdi32.dll
rpcrt4.dll 5.00.2195.2832 437.27 KB (447,760 bytes)
1/7/2003 3:51:05 PM Microsoft Corporation
c:\winnt\system32\rpcrt4.dll
advapi32.dll 5.00.2195.2867 351.77 KB (360,208
bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\advapi32.dll
kernel32.dll 5.00.2195.2778 714.77 KB (731,920
bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\kernel32.dll
msvcrt.dll 6.10.8924.0 284.05 KB (290,869 bytes)
5/4/2001 12:05:02 PM Microsoft Corporation
c:\winnt\system32\msvcrt.dll
winlogon.exe 5.00.2195.2953 173.77 KB (177,936
bytes) 12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\winlogon.exe
sfcfiles.dll 5.00.2195.2967 948.27 KB (971,024 bytes)
1/7/2003 3:51:06 PM Microsoft Corporation
c:\winnt\system32\sfcfiles.dll
ntdll.dll 5.00.2195.2779 478.77 KB (490,256 bytes)
5/4/2001 12:05:02 PM Microsoft Corporation
c:\winnt\system32\ntdll.dll
smss.exe 5.00.2195.2901 44.27 KB (45,328 bytes)
12/8/1999 5:00:00 AM Microsoft Corporation
c:\winnt\system32\smss.exe

```

[Services]

Display Name	Name	State	Start Mode
Service Type	Path	Error Control	
Start Name	Tag ID		
Alerter	Alerter	Running	Auto
Application Management	AppMgmt	Stopped	Manual
Computer Browser	Browser	Running	Auto
Indexing Service	cisvc	Stopped	Manual

```

ClipBook ClipSrv Stopped Manual Own Process
c:\winnt\system32\clipsrv.exe Normal
LocalSystem 0
Distributed File System Dfs Running Auto
Own Process c:\winnt\system32\dfsrv.exe
Normal LocalSystem 0
DHCP Client Dhcp Running Auto Share
Process c:\winnt\system32\services.exe Normal
LocalSystem 0
Logical Disk Manager Administrative Service dmadm
Stopped Manual Share Process
c:\winnt\system32\dmadmin.exe /com Normal
LocalSystem 0
Logical Disk Manager dmserver Running Auto
Share Process c:\winnt\system32\services.exe
Normal LocalSystem 0
DNS Client Dnscache Running Auto Share
Process c:\winnt\system32\services.exe Normal
LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\winnt\system32\services.exe Normal
LocalSystem 0
COM+ Event System EventSystem Running Manual
Share Process c:\winnt\system32\svchost.exe -
k netsvcs Normal LocalSystem 0
Fax Service Fax Stopped Manual Own
Process c:\winnt\system32\faxsvc.exe Normal
LocalSystem 0
IIS Admin Service IISADMIN Running Auto Share
Process c:\winnt\system32\inetrv\inetinfo.exe Normal
LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process c:\winnt\system32\ismssrv.exe Normal
LocalSystem 0
Kerberos Key Distribution Center kdc Stopped
Disabled Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto Share
Process c:\winnt\system32\services.exe Normal
LocalSystem 0
Workstation lanmanworkstation Running Auto
Share Process c:\winnt\system32\services.exe
Normal LocalSystem 0
License Logging Service LicenseService Running
Auto Own Process
c:\winnt\system32\llsdrv.exe Normal
LocalSystem 0
TCP/IP NetBIOS Helper Service LmHosts Running Auto
Share Process c:\winnt\system32\services.exe
Normal LocalSystem 0
Messenger Messenger Running Auto
Share Process c:\winnt\system32\services.exe
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrv Stopped
Manual Own Process
c:\winnt\system32\mnmsrv.exe Normal
LocalSystem 0
Distributed Transaction Coordinator MSDTC Running
Auto Own Process
c:\winnt\system32\msdtc.exe Normal

```

```

LocalSystem 0
Windows Installer MSIServer Stopped Manual Share
Process c:\winnt\system32\msiexec.exe /v Normal
LocalSystem 0
Network DDE NetDDE Stopped Manual Share
Process c:\winnt\system32\netdde.exe Normal
LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped Manual
Share Process c:\winnt\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual
Share Process c:\winnt\system32\svchost.exe -
k netsvcs Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process c:\winnt\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSsp Stopped
Manual Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Running Auto Share
Process c:\winnt\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Plug and Play PlugPlay Running Auto Share
Process c:\winnt\system32\services.exe Normal
LocalSystem 0
IPSEC Policy Agent PolicyAgent Running Auto
Share Process c:\winnt\system32\lsass.exe
Normal LocalSystem 0
Protected Storage ProtectedStorage Running Auto
Share Process c:\winnt\system32\services.exe
Normal LocalSystem 0
PsShutdown PsShutdownSvc Stopped Manual
Own Process
c:\winnt\system32\pssdsvc.exe Normal
LocalSystem 0
Remote Access Auto Connection Manager RasAuto Stopped
Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Remote Access Connection Manager RasMan Stopped
Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Routing and Remote Access RemoteAccess Stopped
Disabled Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Remote Registry Service RemoteRegistry Running
Auto Own Process
c:\winnt\system32\regsvc.exe Normal
LocalSystem 0
Remote Command Service RMSYS Running Auto
Own Process c:\benchcraft\rsys.exe
Normal .Administrator 0
Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\winnt\system32\locator.exe Normal

```

```

LocalSystem 0
Remote Procedure Call (RPC) RpcSs Running Auto
Share Process c:\winnt\system32\svchost -k
rpcss Normal LocalSystem 0
QoS RSVP RSVPSVP Running Manual Own Process
c:\winnt\system32\rsvp.exe -s Normal
LocalSystem 0
Security Accounts Manager SamSs Running Auto
Share Process c:\winnt\system32\lsass.exe
Normal LocalSystem 0
Smart Card Helper SCardDrv Stopped Manual Share
Process c:\winnt\system32\scardsvr.exe Ignore
LocalSystem 0
Smart Card SCardSvr Stopped Manual Share
Process c:\winnt\system32\scardsvr.exe Ignore
LocalSystem 0
Task Scheduler Schedule Running Auto Share
Process c:\winnt\system32\mstask.exe Normal
LocalSystem 0
RunAs Service seclogon Running Auto Share
Process c:\winnt\system32\services.exe Ignore
LocalSystem 0
System Event Notification SENS Running Auto
Share Process c:\winnt\system32\svchost.exe -
k netsvcs Normal LocalSystem 0
Internet Connection Sharing SharedAccess Stopped
Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs Normal
LocalSystem 0
Simple Mail Transport Protocol (SMTP) SMTPSVC Running
Auto Share Process
c:\winnt\system32\inetnsv\inetinfo.exe Normal
LocalSystem 0
Print Spooler Spooler Running Auto Own
Process c:\winnt\system32\spoolsv.exe Normal
LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Manual Own Process
c:\winnt\system32\smlogsvc.exe Normal
LocalSystem 0
Telephony TapiSrv Running Manual Share Process
c:\winnt\system32\svchost.exe -k tapisrv Normal
LocalSystem 0
Terminal Services TermService Stopped Disabled
Own Process c:\winnt\system32\termsrv.exe
Normal LocalSystem 0
Telnet TlntSvr Stopped Manual Own Process
c:\winnt\system32\tlntsvr.exe Normal
LocalSystem 0
Distributed Link Tracking Server TrkSvr Stopped
Manual Share Process
c:\winnt\system32\services.exe Normal
LocalSystem 0
Distributed Link Tracking Client TrkWks Running Auto
Share Process c:\winnt\system32\services.exe
Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped Manual
Own Process c:\winnt\system32\ups.exe
Normal LocalSystem 0
Utility Manager UtilMan Stopped Manual Own
Process c:\winnt\system32\utilman.exe Normal

```

```

LocalSystem 0
Windows Time W32Time Stopped Manual Share
Process c:\winnt\system32\services.exe Normal
LocalSystem 0
World Wide Web Publishing Service W3SVC Stopped
Auto Share Process
c:\winnt\system32\inetnsv\inetinfo.exe Normal
LocalSystem 0
Windows Management Instrumentation WinMgmt Running
Auto Own Process
c:\winnt\system32\wbem\winmgmt.exe Ignore
LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Running Manual Share Process
c:\winnt\system32\services.exe Normal
LocalSystem 0

```

[Program Groups]

```

Group Name Name User Name
Accessories Default User:Accessories Default
User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Accessories\System Tools Default
User:Accessories\System Tools Default User
Startup Default User:Startup Default User
Accessories All Users:Accessories All Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\Games All Users:Accessories\Games All Users
Accessories\Microsoft Script Debugger All
Users:Accessories\Microsoft Script Debugger All Users
Accessories\System Tools All Users:Accessories\System
Tools All Users
Administrative Tools All Users:Administrative Tools All Users
Microsoft SQL Server All Users:Microsoft SQL Server All Users
Startup All Users:Startup All Users
Accessories ACL03\Administrator:Accessories
ACL03\Administrator
Accessories\Accessibility
ACL03\Administrator:Accessories\Accessibility
ACL03\Administrator
Accessories\Entertainment
ACL03\Administrator:Accessories\Entertainment
ACL03\Administrator
Accessories\System Tools
ACL03\Administrator:Accessories\System Tools
ACL03\Administrator
Administrative Tools ACL03\Administrator:Administrative Tools
ACL03\Administrator
Benchcraft ACL03\Administrator:Benchcraft
ACL03\Administrator
QLogic Corporation ACL03\Administrator:QLogic Corporation
ACL03\Administrator

```

```

QLogic Corporation\SANblade Control VIX
ACL03\Administrator:QLogic Corporation\SANblade
Control VIX ACL03\Administrator
Startup ACL03\Administrator:Startup ACL03\Administrator

```

[Startup Programs]

```

Program Command User Name Location
No startup program information

```

[OLE Registration]

```

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available
Image Document "C:\Program Files\Windows
NT\Accessories\imageVue\KodakImg.exe"
WordPad Document "%Program Files%\Windows
NT\Accessories\WORDPAD.EXE"
Windows Media Services DRM Storage object Not
Available
Bitmap Image mspaint.exe

```

[Internet Explorer 5]

[Following are sub-categories of this main category]

[Summary]

```

Item Value
Version 5.00.3315.1000
Build 53315.1000
Product ID 51876-335-9533834-05339
Application Path C:\Program Files\Internet Explorer
Language English (United States)
Active Printer Not Available

Cipher Strength 168-bit
Content Advisor Disabled
IEAK Install No

```

[File Versions]

```

File Version Size Date Path Company
advapi32.dll 5.0.2195.2867 352 KB 5/4/2001
12:05:02 PM C:\WINNT\system32 Microsoft
Corporation
advpack.dll 5.0.3103.1000 87 KB 5/4/2001
12:05:02 PM C:\WINNT\system32 Microsoft
Corporation
browsecl.dll 5.0.3315.2846 35 KB 5/4/2001
12:05:02 PM C:\WINNT\system32 Microsoft
Corporation
browseui.dll 5.0.3315.2846 789 KB 5/4/2001
12:05:02 PM C:\WINNT\system32 Microsoft
Corporation
ckcnv.exe 5.0.2189.1 9 KB 12/8/1999 5:00:00 AM

```

C:\WINNT\system32	Microsoft Corporation		
comctl32.dll	5.81.3103.1000	538 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
crypt32.dll	5.131.2195.2833	451 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
enhsg.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available
iemigrat.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available
iesetup.dll	5.0.3103.1000	57 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
iexplore.exe	5.0.2920.0	59 KB	12/8/1999 5:00:00 AM
C:\Program Files\Internet Explorer	Microsoft Corporation		
imagehlp.dll	5.0.2195.2778	126 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
imghelp.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available
inseng.dll	5.0.3103.1000	72 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
jobexec.dll	5.0.0.1	47 KB	12/8/1999 5:00:00 AM
C:\WINNT\system32	Microsoft Corporation		
jscript.dll	5.1.0.5907	476 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
jsproxy.dll	5.0.2920.0	13 KB	12/8/1999 5:00:00 AM
C:\WINNT\system32	Microsoft Corporation		
msaahtml.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available
mshtml.dll	5.0.3315.2870	2290 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
msjava.dll	5.0.3802.0	923 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
msoss.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available
msxml.dll	8.0.5718.1	493 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
occache.dll	5.0.3103.1000	86 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
ole32.dll	5.0.2195.2887	970 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
oleaut32.dll	2.40.4517.0	612 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
olepro32.dll	5.0.4517.0	160 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
rsabase.dll	5.0.2195.2228	128 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
rsaenh.dll	5.0.2195.2228	131 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
rsapi32.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available
rsasig.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available
schannel.dll	5.1.2195.0	138 KB	5/4/2001 12:05:02 PM

C:\WINNT\system32	Microsoft Corporation		
shdoc401.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available
shdocvw.dll	5.0.3315.2879	1078 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
shell32.dll	5.0.3315.2902	2304 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
shlwapi.dll	5.0.3315.1000	283 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
url.dll	5.0.2920.0	82 KB	12/8/1999 5:00:00 AM
C:\WINNT\system32	Microsoft Corporation		
urlmon.dll	5.0.3315.1000	441 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
vbscript.dll	5.1.0.5907	428 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
webcheck.dll	5.0.3315.1000	252 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
win.com	5.0.2134.1	24 KB	12/8/1999 5:00:00 AM
C:\WINNT\system32	Microsoft Corporation		
wininet.dll	5.0.3315.1000	457 KB	5/4/2001 12:05:02 PM
C:\WINNT\system32	Microsoft Corporation		
winsock.dll	3.10.0.103	3 KB	12/8/1999 5:00:00 AM
C:\WINNT\system32	Microsoft Corporation		
wintrust.dll	5.131.2195.2779	162 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
wsock.vxd	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available
wsock32.dll	5.0.2195.2871	21 KB	5/4/2001
12:05:02 PM	C:\WINNT\system32	Microsoft	
Corporation			
wsock32n.dll	<File Missing>	Not Available	Not Available
Available	Not Available	Not Available	Not Available

[Connectivity]

Item	Value
Connection Preference	Never dial
EnableHttp1.1	1
ProxyHttp1.1	0

LAN Settings

AutoConfigProxy	wininet.dll
AutoProxyDetectMode	Enabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\Administrator\Local Settings\Temporary Internet Files
Total Disk Space	17335 MB
Available Disk Space	15564 MB
Maximum Cache Size	541 MB
Available Cache Size	542 MB

[List of Objects]

Program File	Status	CodeBase
No cached object information available		

[Content]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Content Advisor	Disabled

[Personal Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
Administrator	Administrator	1/7/2003 to 12/14/2102	sha1RSA	

[Other People Certificates]

Issued To	Issued By	Validity	Signature	Algorithm
No other people certificate information available				

[Publishers]

Name

No publisher information available

[Security]

Zone	Security Level
Local intranet	Medium-low
Trusted sites	Low
Internet	Medium
Restricted sites	High

<Microsoft® SQL Server™ 2000 setting>

Startup Parameters

sqlservr -c -x -T3502 -T3428

- c Start SQL Server™ 2000 independently of the Microsoft® Windows® NT Service Control Manager.
- x Disable the keeping of CPU time and cache-hit ration statistics.
- T3502 Prints a message to the log at the beginning and end of each checkpoint.
- T3428 Use half of the memory available on the system during the recovery process to keep a hash table which enables recovery to proceed smoothly.

Prior to the TPC-C run, the following command was executed via osql to turn off automatic checkpoints. Checkpoints were issued manually during the run at 30 minute intervals.

dbcc traceon(-1, 3505)

Microsoft® SQL Server™ 2000 Configuration Parameters

```
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11>
-- File:      VERSION.SQL
--           Microsoft TPC-C Benchmark Kit Ver. IA-64
--           Copyright Microsoft, 2000,2001
-- Purpose:   Returns SQL Server version string
```

```
print " "
select convert(char(30), getdate(),9)
print " "
```

```
-----
Feb 14 2003  5:16:19:340AM
```

(1 row affected)

```
1> 2> 3>
select @@version
```

```
-----
-----
-----
-----
-----
```

```
Microsoft SQL Server 2000 - 8.00.760 (Intel IA-64)
Feb  6 2003 16:07:24
C
opyright (c) 1988-2003 Microsoft Corporation
Enterprise Edition (64-bit) on Windows NT 5.2 (Build 3718: )
```

(1 row affected)

```
1> 2>
1> 2> 3> 4> 5> 6> 7> 8> 9> 10>
-- File:      CONFIG.SQL
--           Microsoft TPC-C Benchmark Kit Ver. IA-64
--           Copyright Microsoft, 2000,2001
-- Purpose:   Collects SQL Server configuration parameters
```

```
print " "
select convert(char(30), getdate(),9)
print " "
```

```
-----
Feb 14 2003  5:16:19:710AM
```

(1 row affected)

1> 2> 3> DBCC execution completed. If DBCC printed error messages, contact your system administrator.
Configuration option 'show advanced options' changed from 1 to 1. Run the RECONFIGURE statement to install.

```
sp_configure "show advanced",1
1> 2> reconfigure with override
1> 2> sp_configure
```

name	minimum	maximum	config_value	run_value
affinity mask	-2147483648	2147483647	-1	-
affinity64 mask	-2147483648	2147483647	0	0
allow updates	0	1	0	0
awe enabled	0	1	0	0
c2 audit mode	0	1	0	0
cost threshold for parallelism	0	32767	5	5
Cross DB Ownership Chaining	0	1	0	0
cursor threshold	-1	2147483647	-1	-
default full-text language	0	2147483647	1033	1033
default language	0	9999	0	0
fill factor (%)	0	100	0	0
index create memory (KB)	704	2147483647	0	0
lightweight pooling	0	1	1	1
locks	5000	2147483647	0	0
max degree of parallelism	0	32	1	1
max server memory (MB)	4	2147483647	504000	504000

max text repl size (B)	0	2147483647	65536	
65536				
max worker threads	32	32767	704	
704				
media retention	0	365	0	
0				
min memory per query (KB)	512	2147483647	1024	
1024				
min server memory (MB)	0	2147483647	0	
0				
nested triggers	0	1	1	
1				
network packet size (B)	512	65536	4096	
4096				
open objects	0	2147483647	0	
0				
priority boost	0	1	1	
1				
query governor cost limit	0	2147483647	0	
0				
query wait (s)	-1	2147483647	-1	-
1				
recovery interval (min)	0	32767	119	
119				
remote access	0	1	1	
1				
remote login timeout (s)	0	2147483647	20	
20				
remote proc trans	0	1	0	
0				
remote query timeout (s)	0	2147483647	600	
600				
scan for startup procs	0	1	0	
0				
set working set size	0	1	0	
0				
show advanced options	0	1	1	
1				
two digit year cutoff	1753	9999	2049	
2049				
user connections	0	32767	0	
0				
user options	0	32767	0	
0				

1>

Appendix D : Space Calculation

60 Day Space

Note : Numbers are in KBytes unless otherwise specified

Warehouses	37000	tpmC	433107.77	tpmC/W	11.71	
Table	Rows	Data	Index	5% Space	8H Space	Total Space
Warehouse	37,000	4,000	416	221		4,637
District	370,000	41,696	664	2,118		44,478
Item	100,000	9,528	592	233		10,353
New-order	333,000,000	5,933,192	15,048		2,960,000	8,908,240
History	1,110,000,000	66,268,664	257,440		10,327,048	76,853,152
Orders	1,110,000,000	36,244,904	17,681,088		8,371,095	62,297,087
Customer	1,110,000,000	807,272,728	50,379,088	19,725,992		877,377,808
Order-line	11,099,967,833	739,997,856	1,751,152		115,143,938	856,892,946
Stock	3,700,000,000	1,184,000,000	2,507,224	27,289,666		1,213,796,890
Totals		2,839,772,568	72,592,712	47,018,229	136,802,081	3,096,185,590
DB File Group	Count	Size	Needed	Overhead		Not Needed
MSSQL_misc_fg	72	1,474,560,000	1,015,061,001	10,150,610		449,348,389
MSSQL_cs_fg	72	2,211,840,000	2,112,086,445	21,120,864		78,632,691
Totals		3,686,400,000	3,127,147,446	31,271,474		527,981,080
Dynamic space	819,763,616	Sum of Data for Order, Order-Line and History (excluding free extents)				
Static space	2,170,891,368	Data + Index + 5% Space + Overhead - Dynamic space				
Free space	167,763,936	Total Seg. Size - Dynamic Space - Static Space - Not Needed				
Daily growth	153,533,401	(Dynamic space/W * 62.5)* tpmC				
Daily spread	-62,536,164	Free space - 1.5 * Daily growth (zero if negative)				
60 day (KB)	11,382,895,400	Static space + 60 (daily growth + daily spread)				
60 day (GB)	10855.57	Excludes OS, Paging and RDBMS Logs				
Log size (MB)	600000.00	Total size of log file				
% Log used	70.51	% of log file used during entire run				
Total N-O Txn	93086016	Total count of N-O transactions during entire run				
Log per N-O txn	4.65	Number of Kbytes per New-Order transaction				
8 Hour Log (GB)	922.70	need double for mirroring				
os, file sys, swap	18.00					
	Disk size (GB)	Priced Qty	Priced (GB)	Needed(GB)	Extra (GB)	
Database, Sys	33.259	1080	35919.72	10,873.57	25,063.01	
	16.868	1	16.87			
Mirrored Log	33.259	56	1862.50	1,845.41	17.10	

Appendix E : Price Quotation

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>

Microsoft

February 13, 2003

NEC Corporation
Keiichi Yamada
1-10 Nisshin-cho,
Fuchu-shi
Tokyo, 1838501

Yamada-san:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-00560	SQL Server 2000 Enterprise Edition (64-bit) <i>Per processor licensing Discount Schedule: Open Program Level C Unit Price reflects a 17% discount from the retail unit price of \$19,999.</i>	\$16,541	32	\$529,312
C11-00821	Windows 2000 Server <i>Server license only - No CALs Discount Schedule: Open Program - No Level Unit Price reflects a 8% discount from the retail unit price of \$799.</i>	\$738	24	\$17,712
254-00170	Visual C++ Standard <i>No discounts applied</i>	\$109	1	\$109
PRO-PRORS-16U-01	Database Server Support Package <i>1 Year Term</i>	\$1,950	3	\$5,850

Some products may not be currently orderable but will be available through Microsoft's normal distribution channels by February 28, 2003.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PCkeya0313020033
Please include this Reference ID in any correspondence regarding this price quote.



Home | About CDW | Customer Support | View Cart | Log On

SmartSearch™

Brands Hardware Software Networking Accessories Telephony Services Training 800 828 4239

RESOURCES

- Order Status
- My Company
- My Account
- Account Team
- New Accounts
- Rebates
- Special Events
- CDW Outlet
- Technical Support
- E-Newsletters
- Solutions Library

ONLINE HELP

PRINTABLE VERSION

SHOPPING CART

- Your Saved Carts
- Save This Cart
- Edit Saved Carts
- Send To An Associate

YOUR SHOPPING CART :

Quantity	Product	CDW	Usually Ships	Price	Ext. Price
<input type="text" value="78"/>	AESP CAT5 RJ-45M to RJ-45M Molded 25' Patch cable gray	126706	Same Day	\$10.83	\$823.08
<input type="text" value="1"/>	Intel PRO/100 S Server Adapter	250851	Same Day	\$68.50	\$68.50
<input type="text" value="5"/>	Intel PRO/100 S Server Adapter, 5-pack	250852	Same Day	\$286.03	\$1,430.15
<input type="text" value="25"/>	NEC AccuSync 50M-BK (black)	382918	Same Day	\$127.92	\$3,198.00
<input type="text" value="12"/>	QLogic SANblade 2340 2Gb 133MHz PCI-X Single Channel HBA	408081	4-6 Days	\$1,319.45	\$15,833.40
Click to remove an item from your cart				Sub-Total	\$21,353.13

QuickCart: Shipping Calc:

Enter a CDW part number to quickly add it to your cart.


Enter a postal code to quickly estimate shipping cost.

< Continue Shopping

Copyright 2003 CDW Computer Centers, Inc.
Terms and Conditions of Use | Terms and Conditions of Sale | Privacy Pledge

<http://www.cdw.com/shop/checkout/cart.asp>

03/02/16



QLogic Corporation • 26600 Laguna Hills Drive • Alliso Viejo • CA 92656 • Ph: (949) 389-6000

To:	Keiichi Yamada NEC Corp. Express Server Performance Lab	Fax:	
From:	Gregory Munck	Date:	February 12, 2003
Re:	MSRP For QLogic HBA, SFP & Switch QLA2350 (Single Port HBA) SFP (8-Shortwave LC Optic 2/1) Sanbox2-16 port Switch	Pages incl cover:	1
cc:			

Yamada-san,

QLogic is pleased to provide the following pricing for your TPC Benchmark publication:

Product	MSRP
QLA2350	\$2095
SFP	\$2150
SANBOX2-16	\$17,995

If you have any questions or concerns please do not hesitate to let me know.

Greg Munck
Asia Pacific Regional Sales Manager
Greg.munck@qlogic.com
(949) 389-6420

FORM: AP279 Rev. B (11/01)