



**TPC Benchmark™ C  
Full Disclosure  
Report**

**Unisys Corporation  
Enterprise Systems**

**Aquanta QR/2 Server**

**using**

**Microsoft NT Server Enterprise Edition 4.0  
and**

**Microsoft SQL Server Enterprise Edition 7.0**

**First Edition  
November 6<sup>th</sup> 1998**

**Unisys Part Number 4494 1771-000**

**First Edition – November 1998**

Unisys Corporation believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. Unisys Corporation assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, Unisys Corporation and Microsoft Corporation provide no warranty on the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment, and therefore results obtained in other operating environments may vary significantly. Unisys Corporation and Microsoft Corporation do not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright © 1998 Unisys Corporation.

All Rights Reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text on the title page of each item reproduced.

Printed in USA, November 1998.

Unisys Corporation Part Number: 4494 1771-000

Unisys and Aquanta are registered trademarks of Unisys Corporation.  
Intel, Pentium and Pentium II and Xeon are registered trademarks of Intel Corporation.  
Microsoft Windows NT and SQL Server are registered trademarks of Microsoft Corporation.  
BEA and Tuxedo are registered trademarks of BEA Systems, Inc.

TPC Benchmark, TPC-C and tpmC are trademarks of the Transaction Processing Performance Council.

Other product names used in this document may be trademarks and/or registered trademarks of their respective companies.

---

## *Page Status*

| <b>Page</b>       | <b>Issue</b> |
|-------------------|--------------|
| i through xii     | -100         |
| 0-1 through 0-3   | -100         |
| 0-4               | Blank        |
| 1-1 through 1-1   | -100         |
| 1-2               | Blank        |
| 2-1 through 2-2   | -100         |
| 3-1 through 3-3   | -100         |
| 3-4               | Blank        |
| 4-1 through 4-8   | -100         |
| 5-1 through 5-8   | -100         |
| 6-1 through 6-2   | -100         |
| 7-1 through 7-2   | -100         |
| 8-1 through 8-1   | -100         |
| 8-2               | Blank        |
| 9-1 through 9-3   | -100         |
| 9-4               | Blank        |
| A-1 through A-54  | -100         |
| B-1 through B-44  | -100         |
| C-1 through C-119 | -100         |
| C-120             | Blank        |
| D-1 through D-2   | -100         |
| E-1 through E-2   | -100         |
| F-1 through F-8   | -100         |

Unisys uses an 11-digit document numbering system. The suffix of the document number (1234 5678-xyz) indicates the document level. The first digit of the suffix (x) designates a revision level; the second digit (y) designates an update level. For example, the first release of a document has a suffix of -100. A suffix of -130 designates the third update to revision 1. The third digit (z) is used to indicate an errata for a particular level and is not reflected in the page status summary.

## **Overview**

This report documents the methodology and results of the TPC Benchmark C (TPC-C) conducted on the Unisys Corporation Aquanta QR/2 server. The operating system on the server was Microsoft Windows NT Server Enterprise Edition 4.0. The DBMS used was Microsoft SQL Server Enterprise Edition 7.0. The operating system on the clients was Microsoft Windows NT Server 4.0 SP3. The clients ran Microsoft's Internet Information Server 3.0 and Tuxedo 6.3 CFS for NT.

## **TPC Benchmark Metrics**

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (five year capital cost per measured tpmC), and the availability date are reported as required by the benchmark specification.

## **Executive Summary**

The following pages contain the executive summary results of the benchmark.

## **Auditor**

The benchmark configuration, environment, and methodology used to produce and validate the test results, along with the pricing model used to calculate the cost per tpmC, were audited by Richard Gimarc of Performance Metrics, Inc. to verify compliance with the relevant TPC specification.




## Aquanata QR/2 Server C/S

TPC-C Rev. 3.4

Report Date:  
6-Nov-1998

|   |   |  |                                     |
|---|---|--|-------------------------------------|
| Total System Cost                             | TPC-C Throughput                                  | Price/Performance                                | Availability Date                   |
| <b>\$455,520</b>                              | <b>18,343.17 tpmC</b>                             | <b>\$24.83 per tpmC</b>                          | <b>29-Dec-1998</b>                  |
| Processors                                    | Database Manager                                  | Operating System                                 | Other Software                      |
| 4 Pentium® II Xeon<br>400 MHz<br>1MB L2 cache | Microsoft SQL<br>Server Enterprise<br>Edition 7.0 | Microsoft NT<br>Server 4.0<br>Enterprise Edition | Microsoft IIS 3.0<br>Tuxedo 6.3 CFS |
|   |   |  | Number of Users                     |
|   |   |  | <b>14,700</b>                       |

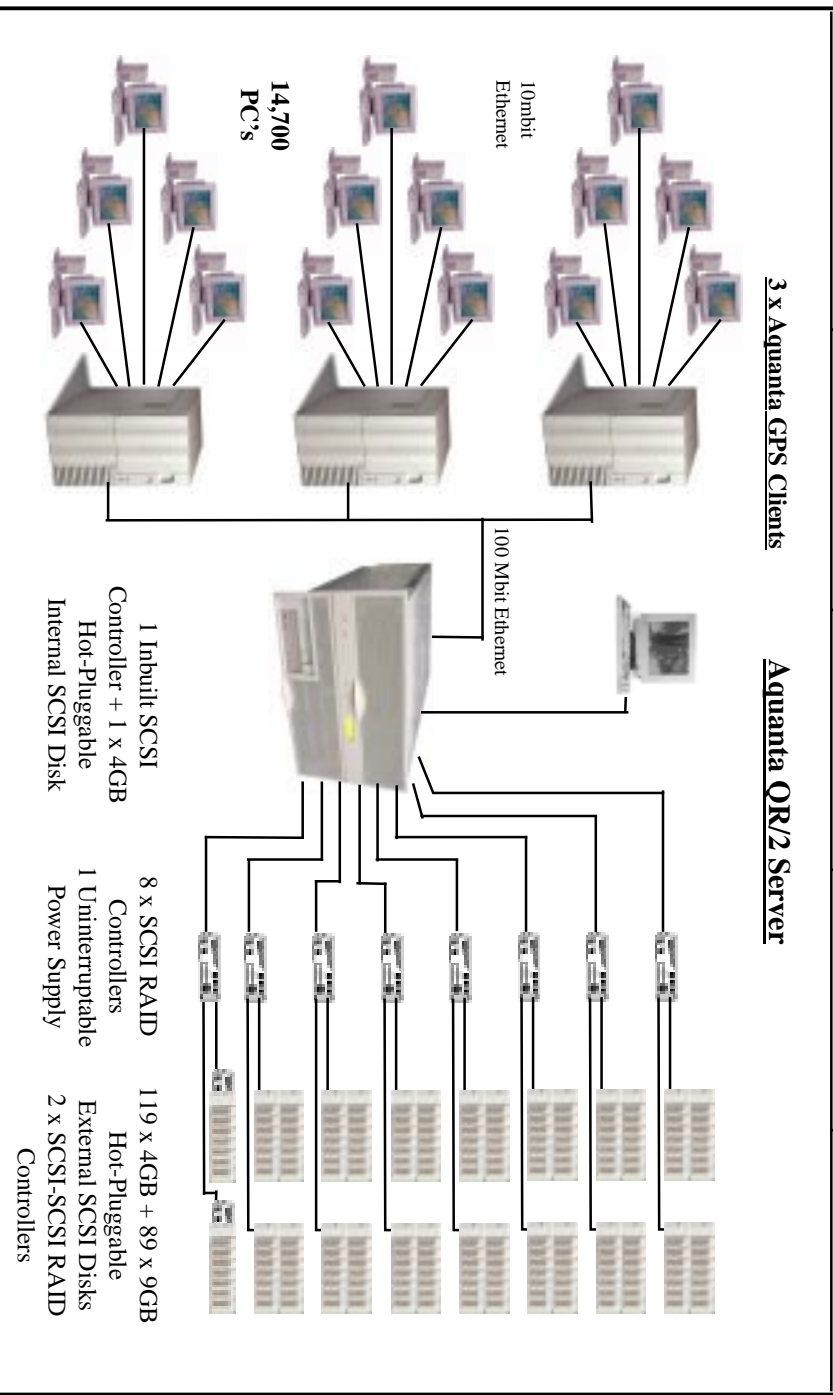

| System Components | Server         |  | Clients  |  |
|-------------------|----------------|--|----------|--|
|                   | Quantity       | Type   | Quantity | Type   |
| Processors        | 4              | 400 MHz Pentium® II Xeon with<br>1MB Level 2 Cache | 3        | 2 x 300MHz Pentium® II with<br>512KB Level 2 Cache |
| Memory            | 1              | 4096MB   | 3        | 256MB  |
| Disk Controllers  | 8 + 2          | SCSI RAID<br>Inbuilt SCSI                          | 3        | Inbuilt SCSI                                       |
| Disk Drives       | 119<br>89<br>1 | 4.24 GB<br>8.48 GB<br>4.23 GB                      | 3        | 2.02 GB  |
| Total Storage     |                | 1263.15 GB   |          | 6.06 GB  |
| CD-ROM / Tape     | 1              | CD-ROM Drive                                       | 3        | CD-ROM Drive                                       |

Unisys Corporation

Aquanta QR/2 Server  
C/S

TPC-C Rev 3.4  
6-Nov-1998

| Description   | Style           | Thir d Party | Brand Pricing | Unit Price | Qty.        | Extended Price    | 5 Years' Maint. |
|---|-----------------|--------------|---------------|------------|-------------|-------------------|-----------------|
| <b>Server Hardware</b>  |                 |              |               |            |             |                   |                 |
| SYS: Aquanta QR/2, w/ CDROM, 0 Proc, 0MB Mem  | QR2000101-BAS   |              |               | \$10,820   | 1           | \$10,820          | \$2,016         |
| PROC: 1x400MHz Pentium II 11MB Cache  | XER2400-1MB     |              |               | \$3,955    | 1           | \$15,820          | \$3,592         |
| ACC: Voltage Regulator Module, Processor  | XEO24001-VRM    |              |               | \$46       | 4           | \$276             |                 |
| MEM: 128 MB Memory Upgrade  | DIW6072-128     |              |               | \$786      | 32          | \$25,152          | \$6,144         |
| DISK: 4GB Drive, Ultra SCSI SCA   | HDS417-CX1      |              |               | \$746      | 1           | \$746             | \$192           |
| ETHERNET: 100Mbit/sec, PCI 32-bit   | ETH1010051-PCI  |              |               | \$117      | 1           | \$117             |                 |
| CDROM: 14.32x Speed, SCSI   | CDR1432-SI      |              |               | \$161      | 1           | \$161             | \$48            |
| MONITOR: 15-inch Color  | EVG2000-E       |              |               | \$272      | 1           | \$272             |                 |
| KEYBD: 104 Key Space saver  | PCK104-SKB      |              |               | \$31       | 1           | \$31              |                 |
| MOUSE: 2 Button PS2   | PWM1-PS2        |              |               | \$23       | 1           | \$23              |                 |
| CTRL:RAID Tr.-SCSI-2 Ultra PCI, 0MB Mem.  | RAD9602-PCI     |              |               | \$1,692    | 8           | \$13,536          | \$4,224         |
| MEM: 16 MB ECC EDO Memory Upgrade   | RAD9616-MEM     |              |               | \$225      | 8           | \$1,800           |                 |
| CBL: SCSI 68-pin HD->VHD Conns  | CBL2210-OSM     |              |               | \$90       | 16          | \$1,440           |                 |
| DISK: 4GB Drive, 10K, SCA + 10% spares  | OSD4203-W45     |              |               | \$625      | 131         | \$81,875          | spared          |
| DISK: 9GB Drive, 10K, SCA + 10% spares  | OSM9203-W45     |              |               | \$930      | 98          | \$91,140          | spared          |
| CAB: Disk, 7 SCA w/ 050 I/F & Cat-Cbl, 0 Disks, 3U  | OSM310050-U05   |              |               | \$1,345    | 14          | \$18,830          | \$7,728         |
| CAB: Disk, 7 SCA w/ 057 I/F, 0 Disks, 3U  | OSM310057-U05   |              |               | \$1,350    | 14          | \$18,900          | \$7,728         |
| CAB: Disk, 7 SCA w/ 100 I/F, 0MB, 0 Disks, 3U   | OSM310100-U05   |              |               | \$2,727    | 2           | \$5,454           | \$2,448         |
| MEM: 32MB OSM cache   | OSM1000-C32     |              |               | \$150      | 2           | \$300             | \$144           |
| CAB: Rackmount Kit for Disk Cages   | OSM3000-RMK     |              |               | \$84       | 30          | \$2,520           |                 |
| PWR: 2nd Power Supply Upgrade, OSM Cabinet  | OSM3000-APM     |              |               | \$261      | 1           | \$522             | \$192           |
| PWR:3000 VA UPS, 3U   | UPD30001-SXR    |              |               | \$2,239    | 2           | \$2,239           | \$648           |
| CAB: Rack Cabinet, w/ fill pns, 36U   | CAB361-SXR      |              |               | \$1,384    | 3           | \$4,152           |                 |
| CAB: Link kit for 36U cabinets  | LNK361-SXR      |              |               | \$231      | 2           | \$462             |                 |
| CAB: Bezel kit 36U  | BEZ3611-CAB     |              |               | \$206      | 3           | \$618             |                 |
| CAB: Stabilizer kit 0U  | WGT39581-SXR    |              |               | \$110      | 3           | \$330             |                 |
| PNL: L&R side panels 36U  | PAN3621-SXR     |              |               | \$192      | 1           | \$192             |                 |
|   | <b>Subtotal</b> |              |               |            | <b>1</b>    | <b>\$297,728</b>  | <b>\$35,064</b> |
| <b>Server Software</b>  |                 |              |               |            |             |                   |                 |
| Microsoft NT Server Enterprise Edition 4.0, incl 25 CALs  |                 | Microsoft    |               | \$3,999    | 2           | \$3,999           | \$0             |
| Microsoft SQL Server Enterprise Edition 7.0, unlimited user license   |                 | Microsoft    |               | \$28,999   | 1           | \$28,999          | \$10,475        |
|   | <b>Subtotal</b> |              |               |            | <b>1</b>    | <b>\$32,998</b>   | <b>\$10,475</b> |
| <b>Client Hardware</b>  |                 |              |               |            |             |                   |                 |
| SYS: Aquanta GPS, 0 Proc, 0MB Mem   | GPS600071-BAS   |              |               | \$945      | 3           | \$2,835           | \$936           |
| PROC:1x300MHz Pentium II/512KB Cache  | GPS2300-512     |              |               | \$663      | 6           | \$5,178           | \$1,152         |
| UPGRD: GPS P-II 2nd CPU Supl.   | GPS600071-P2U   |              |               | \$32       | 3           | \$96              | \$144           |
| MEM: 128 MB Memory Upgrade  | DIW672-128      |              |               | \$741      | 6           | \$4,446           | \$1,008         |
| DISK: 2GB Ultra SCSI 3.5 Internal   | HDS2000-SW7     |              |               | \$573      | 3           | \$1,719           | \$864           |
| CDROM: 14.32x Speed, SCSI   | CDR1432-SI      |              |               | \$161      | 3           | \$483             | \$144           |
| ETHERNET: 100Mbit/sec, PCI 32-bit   | ETH101007-PCI   |              |               | \$101      | 6           | \$606             |                 |
| ETHERNET: 100Mbit/sec, PCI 32-bit, Quad   | SF1001-ET4      |              |               | \$1,212    | 3           | \$3,636           | \$720           |
| MONITOR: 15-inch Color  | EVG2000-E       |              |               | \$272      | 1           | \$816             |                 |
| KEYBD: 104 Key Space saver  | PCK104-SKB      |              |               | \$31       | 3           | \$93              |                 |
| MOUSE: 2 Button PS2   | PWM1-PS2        |              |               | \$23       | 3           | \$69              |                 |
|   | <b>Subtotal</b> |              |               |            | <b>3</b>    | <b>\$19,977</b>   | <b>\$4,968</b>  |
| <b>Client Software</b>  |                 |              |               |            |             |                   |                 |
| Microsoft Windows NT Server 4.0, incl 5 CALs  |                 | Microsoft    |               | \$609      | 2           | \$2,427           | \$0             |
| Microsoft Visual C++ Professional 5.0   |                 | Microsoft    |               | \$499      | 1           | \$499             | \$0             |
| TUXEDO Core Functional Services 6.3 for NT  |                 | BEA          |               | \$3,000    | 3           | \$9,000           | \$6,750         |
|   | <b>Subtotal</b> |              |               |            | <b>3</b>    | <b>\$11,926</b>   | <b>\$6,750</b>  |
| <b>User Connectivity</b>  |                 |              |               |            |             |                   |                 |
| Ethernet Hub, 8-Port 100TX, TrueFast + 10% spares   | NX-H8TXD        | Netlux       |               | \$215      | 3           | \$645             | spared          |
| Ethernet Hub, 8-Port 10Base-T + 1-Port BNC + 10% spares   | DEH2924         | DataComm     |               | \$33       | 2023        | \$66,759          | spared          |
|   | <b>Subtotal</b> |              |               |            | <b>2023</b> | <b>\$67,404</b>   | <b>\$0</b>      |
|   | <b>Total</b>    |              |               |            |             | <b>\$430,033</b>  | <b>\$57,257</b> |
|   |                 |              |               |            |             | <b>(\$31,771)</b> |                 |
| <b>Notes:</b>   |                 |              |               |            |             |                   |                 |
| 1. HW Maintenance - 1st 36 months included in Unisys product costs. The next 24 months are at the level: Standard Performance Gold.   |                 |              |               |            |             |                   |                 |
| 2. All Microsoft maintenance is covered by the maintenance cost of Microsoft SQL Server.  |                 |              |               |            |             |                   |                 |
| 3. 10% or minimum 2 spares are added in place of onsite service (products have a five year year return-to-vendor warranty)  |                 |              |               |            |             |                   |                 |
| 4. Pricing: 1 = Western Micro, 2 = Microsoft, 3 = BEA, 4 = Netlux, 5 = DataComm Whse  |                 |              |               |            |             |                   |                 |
| <b>The benchmark results and test methodology were audited by Richard Gimarc of Performance Metrics, Inc.</b>   |                 |              |               |            |             |                   |                 |
| Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumption about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmarks specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at <a href="mailto:pricing@tpc.org">pricing@tpc.org</a> . |                 |              |               |            |             |                   |                 |

**Five Year Cost of Ownership \$455,520**  
**TPC-C Throughput 18,343.17**  
**\$/tpmc \$24.83**

# NUMERICAL QUANTITIES SUMMARY

Unisys Aquanta QR/2 Server  
Microsoft SQL Server Enterprise Edition 7.0

**MQTH, Computed Maximum Qualified Throughput:** **18343.17**  
 % throughput difference, reported & reproducibility runs: 0.02%

### Transaction Mix

|              |        |
|--------------|--------|
| New Order    | 44.84% |
| Payment      | 43.09% |
| Delivery     | 4.00%  |
| Stock-Level  | 4.04%  |
| Order-Status | 4.03%  |

### Response Times

| Transaction         | Average | Maximum | 90th %ile |
|---------------------|---------|---------|-----------|
| New-Order           | 0.44    | 5.72    | 0.62      |
| Payment             | 0.27    | 4.37    | 0.43      |
| Delivery            | 0.12    | 3.13    | 0.14      |
| Stock-Level         | 2.45    | 6.23    | 3.32      |
| Order Status        | 0.32    | 2.80    | 0.47      |
| Menu                | 0.12    | 3.56    | 0.13      |
| Delivery (Deferred) | 0.56    | 3.88    | 0.84      |

### Response time delay added for emulated components (seconds)

|                    |     |
|--------------------|-----|
| RT Response time   | 0.1 |
| Menu Response time | 0.1 |

### Keying/Think Time Times (seconds)

| Transaction  | Minimum | Average     | Maximum     |
|--------------|---------|-------------|-------------|
| New-Order    | 18.00/0 | 18.01/12.04 | 18.06/120.3 |
| Payment      | 3.00/0  | 3/12.05     | 3.04/120.3  |
| Delivery     | 2.00/0  | 2/5.06      | 2.03/50.6   |
| Stock-Level  | 2.00/0  | 2/5.03      | 2.03/50.6   |
| Order-Status | 2.00/0  | 2/10.08     | 2.03/100.71 |

### Test Duration

|  |            |
|--|------------|
| Ramp up time   | 39 minutes |
| Measurement interval (M)                                       | 30 minutes |
| Transactions (all types) completed during measurement interval | 1227252    |
| Ramp-down time   | 18 minutes |

### Checkpointing:

|                       |            |
|-----------------------|------------|
| Number of checkpoints | 1          |
| Checkpoint interval   | 30 minutes |

# ***Table of Contents***

---

|  |            |
|--|------------|
| Abstract.....  | iv         |
| Table of Contents.....                                       | viii       |
| Preface.....   | xiii       |
| <b>0. General Items.....</b>                                 | <b>0-1</b> |
| 0.1. Order and Titles.....                                   | 0-1        |
| 0.2. Executive Summary Statement.....                        | 0-1        |
| 0.3. Numerical Quantities Summary.....                       | 0-1        |
| 0.4. Application Code Disclosure.....                        | 0-1        |
| 0.5. Benchmark Sponsor.....                                  | 0-2        |
| 0.6. Parameter Settings.....                                 | 0-2        |
| 0.7. Configuration Diagrams.....                             | 0-2        |
| <b>1. Clause 1: Logical Database Design.....</b>             | <b>1-1</b> |
| 1.1. Table Definitions.....                                  | 1-1        |
| 1.2. Physical Organization of the Database.....              | 1-1        |
| 1.3. Insert and/or Delete Operations.....                    | 1-1        |
| 1.4. Partitioning.....                                       | 1-1        |
| 1.5. Replication, Duplication or Additions.....              | 1-1        |
| <b>2. Clause 2: Transaction &amp; Terminal Profiles.....</b> | <b>2-1</b> |
| 2.1. Random Number Generation.....                           | 2-1        |
| 2.2. Input/Output Screen Layout.....                         | 2-1        |
| 2.3. Priced Terminal Feature Verification.....               | 2-1        |
| 2.4. Presentation Managers or Intelligent Terminal.....      | 2-1        |
| 2.5. Transaction Statistics.....                             | 2-1        |
| 2.6. Queuing Mechanism of Delivery.....                      | 2-2        |
| <b>3. Clause 3: Transaction &amp; System Properties.....</b> | <b>3-1</b> |
| 3.1. Transaction System Properties (ACID).....               | 3-1        |
| 3.2. Atomicity.....  | 3-1        |
| 3.2.1. Completed Transaction.....                            | 3-1        |
| 3.2.2. Aborted Transactions.....                             | 3-1        |
| 3.3. Consistency.....  | 3-2        |



|   |                                     |
|---|-------------------------------------|
| 3.4. Isolation.....   | 3-2                                 |
| 3.5. Durability .....   | 3-2                                 |
| 3.5.1. Loss of Data Disk.....                                 | 3-2                                 |
| 3.5.2. Instantaneous Interruption and Loss of Memory .....    | 3-3                                 |
| 3.5.3. Loss of Log Disk .....                                 | <b>Error! Bookmark not defined.</b> |
| 4. Clause 4: Scaling & Database Population .....              | 4-1                                 |
| 4.1. Initial Cardinality of Tables .....                      | 4-1                                 |
| 4.2. Constant Values.....                                     | 4-1                                 |
| 4.3. Database Layout.....                                     | 4-2                                 |
| 4.4. DBMS: Data Model and DBMS Interface/Access Language..... | 4-2                                 |
| 4.5. DBMS Partitions/Replications.....                        | 4-2                                 |
| 4.6. DBMS Space Requirements .....                            | 4-2                                 |
| 5. Clause 5: Performance Metrics & Response Time.....         | 5-1                                 |
| 5.1. Measured Throughput (ipmC).....                          | 5-1                                 |
| 5.2. Response Times.....                                      | 5-1                                 |
| 5.3. Keying and Think Times .....                             | 5-1                                 |
| 5.4. Response Time Frequency Distribution Curves .....        | 5-2                                 |
| 5.5. New Order Think Time Frequency Distribution Curve.....   | 5-4                                 |
| 5.6. Response Time versus Throughput Performance Curve.....   | 5-5                                 |
| 5.7. New-Order Throughput vs. Time .....                      | 5-5                                 |
| 5.8. Determination of “Steady State” .....                    | 5-6                                 |
| 5.9. Work Performed During Steady State.....                  | 5-6                                 |
| 5.10. Reproducibility.....                                    | 5-7                                 |
| 5.11. Measurement Interval Duration.....                      | 5-7                                 |
| 5.12. Regulation of Transaction Mix.....                      | 5-7                                 |
| 5.13. Transaction Statistics .....                            | 5-7                                 |
| 5.14. Checkpoint Statistics.....                              | 5-8                                 |
| 6. Clause 6: SUT, Driver & Communications Definition .....    | 6-1                                 |
| 6.1. Remote Terminal Emulator (RTE) Description .....         | 6-1                                 |
| 6.2. Emulated Components .....                                | 6-1                                 |
| 6.3. Functional Diagrams.....                                 | 6-1                                 |
| 6.4. Network Configuration .....                              | 6-1                                 |
| 6.5. Network Bandwidth .....                                  | 6-1                                 |
| 6.6. Operator Intervention.....                               | 6-1                                 |
| 7. Clause 7: Pricing .....                                    | 7-1                                 |
| 7.1. Pricing.....   | 7-1                                 |
| 7.1.1. System Pricing .....                                   | 7-1                                 |
| 7.1.2. Maintenance Pricing .....                              | 7-1                                 |
| 7.1.3. Discounts .....  | 7-1                                 |

|  |     |
|--|-----|
| 7.2. Availability .....  | 7-2 |
| 7.3. Measured IpmC, Price/Performance, and Availability Date ..... | 7-2 |
| 7.4. Country-Specific Pricing .....                                | 7-2 |
| 7.5. Usage Pricing .....   | 7-2 |
| 8. Clause 8 : Full Disclosure Availability .....                   | 8-1 |
| 8.1. Availability .....  | 8-1 |
| 9. Clause 9 : Audit .....  | 9-1 |
| 9.1. Auditor's Report .....  | 9-1 |
| Appendix A - Client/Server Source .....                            | A-1 |
| Appendix B - Database Design .....                                 | B-1 |
| Appendix C - Tunable Parameters .....                              | C-1 |
| Appendix D - RTE Code .....  | D-1 |
| Appendix E - Disk Storage .....                                    | E-1 |
| Appendix F - Third-Party Price Quotations .....                    | F-1 |

# Figures

|   |     |
|---|-----|
| Figure 0.1: Benchmarked Configuration .....               | 0-3 |
| Figure 0.2: Priced Configuration .....                    | 0-3 |
| Figure 5.1.1: New Order Response Time Distribution .....  | 5-2 |
| Figure 5.2: Payment Response Time Distribution .....      | 5-2 |
| Figure 5.3: Order Status Response Time Distribution ..... | 5-3 |
| Figure 5.4: Delivery Response Time Distribution .....     | 5-3 |
| Figure 5.5: Stock Level Response Time Distribution .....  | 5-4 |
| Figure 5.6: New Order Think Time Distribution .....       | 5-4 |
| Figure 5.7: Response Time versus Throughput .....         | 5-5 |
| Figure 5.8: Throughput (tpmC) versus Time .....           | 5-5 |

# Tables

|  |     |
|--|-----|
| Table 2.1: Transaction Statistics .....                | 2-2 |
| Table 4.1: Initial Cardinality of Database Table ..... | 4-1 |
| Table 4.2: Constant C for NURand .....                 | 4-1 |
| Table 4.3: Disk Cage Configuration .....               | 4-3 |
| Table 4.4: RAID Adapter Disk Configuration .....       | 4-5 |
| Table 4.5: Disk Administrator Configuration .....      | 4-8 |
| Table 5.1: Response Time Data .....                    | 5-1 |
| Table 5.2: Keying Times .....                          | 5-1 |
| Table 5.3: Think Times .....                           | 5-1 |
| Table 5.4: Transaction Statistics .....                | 5-8 |

## **Document Structure**

The TPC Benchmark C Standard Specification requires test sponsors to publish, submit to the TPC, and make available to the public, a full disclosure report for any result to be considered compliant with the specification. The required contents of the full disclosure report are specified in Clause 8.

This report is submitted to satisfy the specification's requirement for full disclosure. It documents the compliance of the benchmark implementation and execution reported for the Unisys Corporation Aquanta QR/2 Server using Microsoft Windows NT 4.0 Enterprise Edition and Microsoft SQL Server Enterprise Edition 7.0.

## **TPC Benchmark C Overview**

The TPC Benchmark™ C Standard Specification Revision 3.4 was developed by the Transaction Processing Council (TPC). It is the intent of the TPC to develop a suite of benchmarks to measure the performance of computer systems executing a wide range of applications. Unisys and Microsoft Corporations are active participants in the TPC to define and develop such a suite of benchmarks.

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity.
- On-line and deferred transaction execution modes.
- Multiple on-line terminal sessions.
- Moderate system and application execution time.
- Significant disk input/output.
- Transaction integrity (ACID properties).
- Non-uniform distribution of data access through primary and secondary keys.
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships.
- Contention on data access and update.

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP environments, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

# 0.

## *General Items*

### **0.1. Order and Titles**

*The order and titles of sections in the Test Sponsor's Full Disclosure report must correspond with the order and titles of sections from the TPC-C standard specification (i.e., this document). The intent is to make it as easy as possible for readers to compare and contrast material in different Full Disclosure reports.*

The order and titles of the sections in this report correspond with those from the TPC-C standard specification.

### **0.2. Executive Summary Statement**

*The TPC Executive Summary Statement must be included near the beginning of the Full Disclosure report.*

The TPC Executive Summary Statement is included near the beginning of this report.

### **0.3. Numerical Quantities Summary**

*The numerical quantities listed below must be summarized near the beginning of the Full Disclosure report :*

- *measurement interval in minutes,*
- *number of checkpoints in the measurement interval,*
- *checkpoint interval in minutes,*
- *number of transactions (all types) completed within the measurement interval,*
- *computed Maximum Qualified Throughput in tpmC,*
- *percentage difference between reported throughput and throughput obtained in reproducibility run,*
- *ninetieth percentile, average and maximum response times for the New-Order, Payment, Order-Status, Stock-Level, Delivery (deferred and interactive) and Menu transactions,*
- *time in seconds added to response time to compensate for delays associated with emulated components,*
- *percentage of transaction mix for each transaction type.*

These numerical quantities are summarized near the beginning of this report.

### **0.4. Application Code Disclosure**

*The applicable program (as defined in Clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input and output functions.*

Appendix A contains the client application code used in this TPC-C benchmark. Appendix B contains the SQL stored procedures which implement the TPC-C transactions.

## 0.5. Benchmark Sponsor

*A statement identifying the benchmark sponsor(s) and other participating companies must be provided.*

This TPC benchmark C was sponsored by Unisys Corporation. The benchmark test was developed by Microsoft and Unisys. The benchmark was conducted at Unisys, Mission Viejo, California.

## 0.6. Parameter Settings

*Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including but not limited to:*

- *Data Base tuning options*
- *Recovery/commit options*
- *Consistency/locking options*
- *Operating system and application configuration parameters*

Appendix C contains the configuration and system parameters used in running these TPC-C tests. It also contains all the client and server OS, and SQL Server tunable parameters.

## 0.7. Configuration Diagrams


*Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:*

- *Number and type of processors.*
- *Size of allocated memory, and any specific mapping/partitioning of memory unique to the test.*
- *Number and type of disk units (and controllers, if applicable).*
- *Number of channels or bus connections to disk units, including their protocol type.*
- *Number of LAN (e.g., Ethernet) connections, including routers, workstations, terminals, etc., that were physically used in the test or are incorporated into the pricing structure (see Clause 8.1.8).*
- *Type and the run-time execution location of software components (e.g., DBMS, client processes, transaction monitors, software drivers, etc.).*


The Remote Terminal Emulator (RTE) software used for these TPC-C tests is proprietary to Unisys. The benchmarked configuration of the RTE and Aquanta QR/2 server is illustrated in Figure 0.1. Tables 4.3, 4.4 and 4.5 contain a detailed explanation of the disk configuration.

The priced configuration for the Aquanta QR/2 server is shown in Figure 0.2.

**Figure 0.1: Benchmarked Configuration**

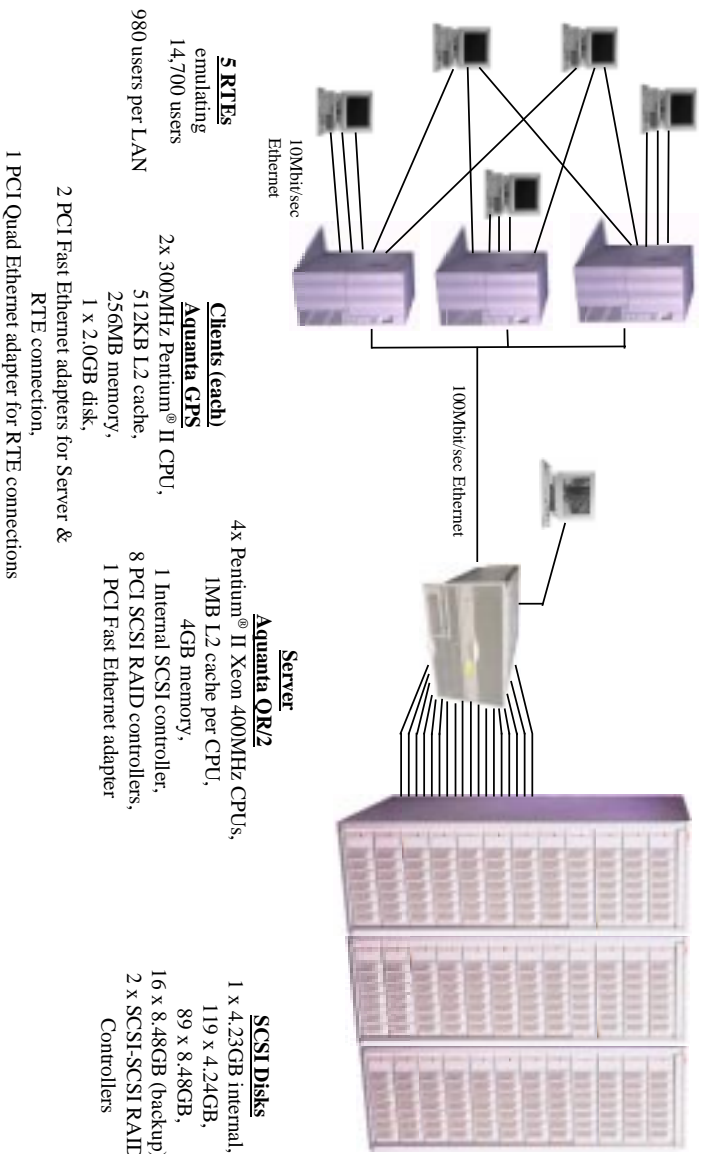

**Aquanta OR/2 Server - Benchmarked Configuration**

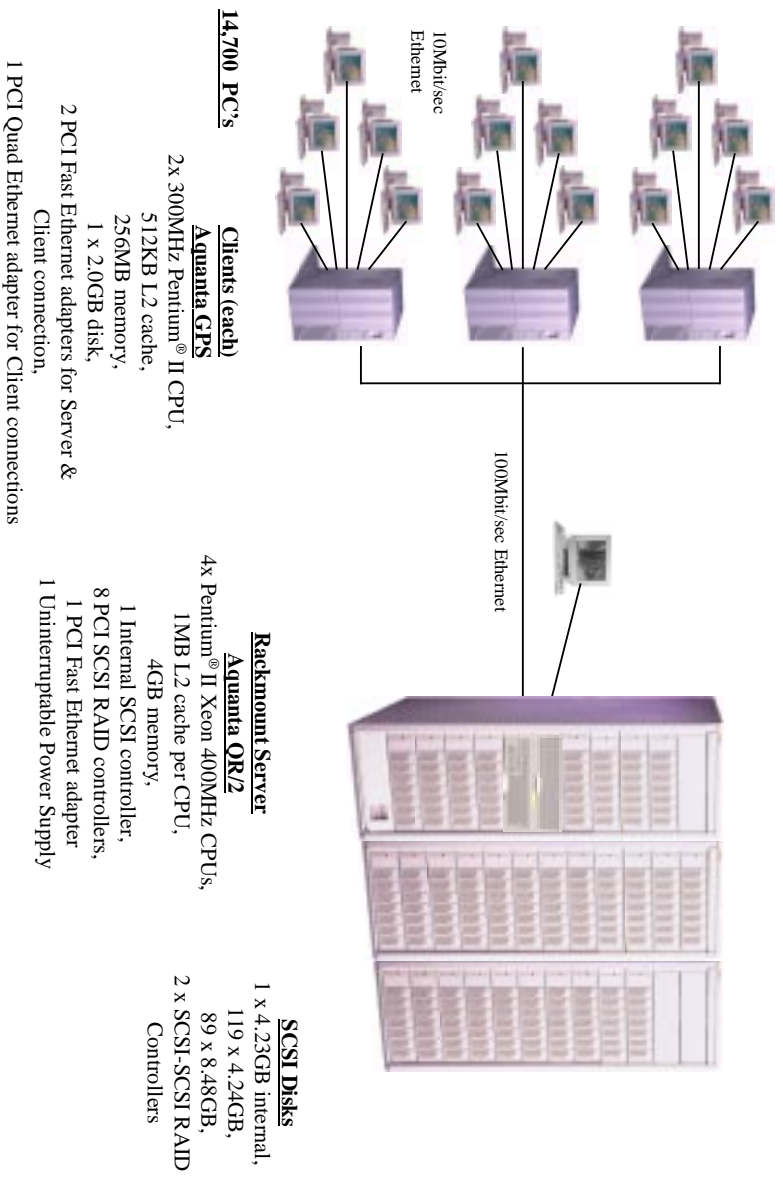

**Figure 0.2: Priced Configuration**

**Aquanta OR/2 Server - Priced Configuration**





# 1.

## *Clause 1: Logical Database Design*

---

### 1.1. Table Definitions

*Listings must be provided for all table definition statements and all other statements used to setup the data base.*

Appendix B contains the SQL definitions of all the required database files, filegroups, tables, indexes and stored procedures, plus a listing of the program used to load the database and establish the required initial populations of each table.

### 1.2. Physical Organization of the Database

*The physical organization of tables and indices, within the data base, must be disclosed.*

The disk space was allocated to SQL Server according to the data in Table 4.4. The SQL definitions are contained in Appendix B.

### 1.3. Insert and/or Delete Operations

*It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restriction in the SUT data base implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the maximum key value for these new rows.*

There were no restrictions on insert and/or delete operations to any of the tables.

### 1.4. Partitioning

*While there are few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.*

Partitioning was not used for any table in this implementation.

### 1.5. Replication, Duplication or Additions

*Replication of tables, if used, must be disclosed.*

*Additional and/or duplicate attributes in any table must be disclosed along with a statement on the impact on performance.*

No replications, duplications or additional attributes were used in this implementation.



## **2. Clause 2: Transaction & Terminal Profiles**

### **2.1. Random Number Generation**

*The method of verification for the random number generation must be disclosed.*

The drivers used the Unisys RTE program, which was independently audited. The initial population of the database was performed by the loader program from V4.01 of the Microsoft TPC-C toolkit, which was also independently audited. Furthermore, the auditor sampled various initial and runtime distributions produced by this implementation to verify correctness.

### **2.2. Input/Output Screen Layout**

*The actual layout of the terminal input/output screens must be disclosed.*

The screen layouts are based on those in Clauses 2.4.3, 2.5.3, 2.6.3, 2.7.3. and 2.8.3 of the TPC Benchmark C Standard Specification. There are some minor differences in appearance due to the use of a web client implementation.

### **2.3. Priced Terminal Feature Verification**

*The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).*

This was verified by the auditor.

### **2.4. Presentation Managers or Intelligent Terminal**

*Any usage of presentation managers or intelligent terminals must be explained.*

Application code running on the client implemented the TPC-C user interface. A listing of this code is included in Appendix A. No presentation manager was used on the client, as screen manipulation and data input/output was handled for each user by the Microsoft Internet Explorer web browser running on each user PC.

### **2.5. Transaction Statistics**

*The percentage of New-Order transactions that were rolled back as a result of an unused item number must be disclosed.*

*The number of items per order entered by New-Order transactions must be disclosed.*

*The percentage of home and remote Payment transactions must be disclosed.*

*The percentage of Payment and Order-Status transactions that used non-primary key (C\_LAST) access to the database must be disclosed.*

*The percentage of Delivery transactions that were skipped as a result of an insufficient number of rows in the NEW-ORDER table must be disclosed.*

*The mix (i.e., percentages) of transaction types seen by the SUT must be disclosed.*

Table 2.1 contains all these statistics.

**Table 2.1: Transaction Statistics**

| <b>Transaction Type</b> | <b>Statistics</b>                     | <b>Value</b>   |
|-------------------------|---------------------------------------|----------------|
| New Order               | Rolledback transactions               | 0.98%          |
|                         | Home warehouse                        | 99.00%         |
|                         | Remote warehouse                      | 1.00%          |
|                         | Average Items per Order               | 10.00          |
| Payment                 | Home warehouse                        | 84.94%         |
|                         | Remote warehouse                      | 15.06%         |
|                         | Non-primary key access                | 60.04%         |
| Order Status            | Non-primary key access                | 60.08%         |
| Delivery                | Skipped transactions (Interactive)    | 0              |
|                         | Skipped transaction counts (Deferred) | 0              |
|                         | Skipped District counts (Deferred)    | 0              |
| Transaction Mix         | New Order                             | 44.84%         |
|                         | Payment                               | 43.09%         |
|                         | Delivery                              | 4.00%          |
|                         | Stock-Level<br>Order-Status           | 4.04%<br>4.03% |

## 2.6. Queuing Mechanism of Delivery

*The queuing mechanism used to defer execution of the Delivery transaction must be disclosed.*

Tuxedo provides the queue for delivery servers. The client application process posts delivery transactions to the delivery queue using a Tuxedo asynchronous call with the TPNoReply option. Upon return from this call, the client application provides a 'delivery queued' response to the user. Delivery servers independently retrieve messages from their queue, submit them to the data base for processing, and log the result to a file upon completion. The source code for this delivery process is included in Appendix A.

## **3. Clause 3: Transaction & System Properties**

### **3.1. Transaction System Properties (ACID)**

*The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.*

The TPC Benchmark C Standard Specification defines a set of transaction processing system properties that a system under test (SUT) must support during the execution of the benchmark. Those properties are Atomicity, Consistency, Isolation, and Durability (ACID).

This section defines each of these properties, describes the steps taken to ensure that they were present during the test and describes a series of tests done to demonstrate compliance with the specification. All ACID property tests were executed successfully.

### **3.2. Atomicity**

*The system under test must guarantee that data base transactions are atomic; the system will either perform all individual operations on the data, or will assure that no partially-completed operations leave any effects on the data.*

#### **3.2.1. Completed Transaction**

*Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number) and verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have been changed appropriately.*

The balances from a randomly selected warehouse, district, and customer row were retrieved by customer number from a script. A Payment transaction was submitted with the same warehouse, district and customer identifiers for a known amount. After completion of the Payment transaction, the balances of the selected warehouse, district, and customer were again retrieved to verify that the changes had been made correctly.

#### **3.2.2. Aborted Transactions**

*Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number) and substitute a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have NOT been changed.*

The balances from a randomly selected warehouse, district, and customer row were retrieved by customer number from a script. A Payment transaction was submitted with the same warehouse, district and customer identifiers that issued a ROLLBACK command rather than a COMMIT. After the transaction completed, the balances of the selected warehouse, district, and customer were again retrieved to verify that no changes had been made to the database.

### 3.3. Consistency

*Consistency is the property of the application that requires any execution of a data base transaction to take the data base from one consistent state to another, assuming that the data base is initially in a consistent state.*

The benchmark specification requires explicit demonstration of the following four consistency conditions:

1. The sum of the district balances in a warehouse is equal to the warehouse balance;
  2. For each district, the next order id minus one is equal to maximum order id in the ORDER table and equal to the maximum new order id in the NEW ORDER table;
  3. For each district, the maximum order id minus minimum order id in the ORDER table plus one equals the number of rows in the NEW-ORDER table for that district;
  4. For each district, the sum of the order line counts in the ORDER table equals the number of rows in the ORDER-LINE table for that district;
- In order to demonstrate this consistency, the following steps were taken:
1. Prior to the start of a benchmark run, the consistency of the database was verified by testing successfully conditions 1-4 described above with a script.
  2. A run under full user load was executed for over 10 minutes with a checkpoint during the run.
  3. After completion of that test, the consistency of the database was again verified by successfully testing using the same consistency script as in step 1.

### 3.4. Isolation

*Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.*

The benchmark specification defines seven required tests to be performed to demonstrate that required levels of transaction isolation are met. These tests, described in Clauses 3.4.2.1 - 3.4.2.7, were all performed from a script and verified by the auditor. In Isolation Test 7, Case A was observed. In addition, the phantom tests and stock level tests were executed and verified to be successful.

### 3.5. Durability

*The tested system must guarantee durability: the ability to preserve the effects of committed transactions and insure data base consistency after recovery from any one of the failures listed in Clause 3.5.3.*

Three durability tests were executed to satisfy the requirements of the specification. The test for loss of memory and instantaneous interruption was combined and performed with a fully scaled database with 14,670 emulated users.

The loss of log test was also performed on the fully scaled database. The loss of data test was performed on a separate, equivalent system, using a ten warehouse database with 100 emulated users. To the best of our knowledge, these tests prove that the fully scaled configuration used for the throughput test would also meet all durability tests.

#### 3.5.1. Loss of Log Disk and Loss of Data Disk

The following steps were taken (using a ten warehouse database on the same system) to demonstrate durability in the case of loss of a log disk and of data disk. The same log disks and controllers were used for the log as for the fully scaled database. Two separate data disks were on each of two existing controllers.

1. The database was backed up to extra disks on a dump device.

2. The D\_NEXT\_O\_ID fields for all rows in the district table were summed up to determine the initial count of orders present in the database.
3. The RTE was started with 100 users. On the driver systems, committed and rolled back New-Order transactions were recorded in a “success” file.
4. After ten minutes of running at steady state, a hot-pluggable log disk was removed from the disk cabinet, with no effect on NT or SQL server.
5. After 5 additional minutes of operation, a hot-pluggable data disk was removed from the disk cabinet.
6. NT and SQL Server encountered IO errors due to the missing disk and recorded these errors in the NT event log and SQL Server error log, respectively. Two RTEs also recorded errors.
7. First, the RTEs and clients were stopped, then SQL Server was used to take a dump of the transaction log to the dump device.
8. Next, SQL server was shutdown, then restarted, and scripts were executed to drop the database and all its devices. Then, SQL Server was shutdown again and the SUT shutdown.
9. A data disk was inserted in the disk cabinet to replace the one removed. The RAID controller was used to recreate the stripe set containing the new data disk. (The missing log drive was not replaced.)
10. The SUT was restarted, and Disk Administrator was used to assign the proper drive letter to the new volume. SQL Server was then restarted and a new (empty) database created as part of the restore database process. That process loaded the initial database into the new database, but did not perform any recovery. Next the transaction log was restored, followed by transaction recovery. The latter step restored all committed transactions to the database.
11. Consistency condition 3 of Clause 3.3.2.3 was executed to verify database consistency.
12. Step 2 was repeated to determine the total number of orders. This number was subtracted from the count obtained previously in Step 2 to determine the number of additional orders added to the database.
13. The contents of the “success” files on the drivers were sampled to verify that the records in the “success” file for committed New-Order transactions had corresponding records in the ORDER table and no entries existed for rolled back transactions. Moreover, the counts were matched with those obtained in step 12.

### 3.5.2. Instantaneous Interruption and Loss of Memory

Instantaneous interruption and loss of memory tests were combined because the loss of power erased the contents of memory. This failure was induced by removing the primary power to the System Under Test while the benchmark was executing.

1. The D\_NEXT\_O\_ID fields for all rows in the district table were summed up to determine the initial count of orders present in the database (count1).
2. On the driver systems, committed and rolled back New-Order transaction were recorded in a “success” file.
3. The benchmark was executed at full load with 14,670 emulated users for a minimum of 10 minutes.
4. Shortly after execution of a checkpoint completed, the system’s primary power was turned off.
5. After transaction failures were noted by the RTEs, the RTEs and clients were shutdown.
6. Power was restored to the SUT, the system rebooted, SQL Server was restarted, and automatic database recovery was performed. The database recovery used the transaction log to reapply all committed transactions and rollback any (in progress) uncommitted transactions, so that the database disks were correct.
7. After recovery finished, Consistency Condition of Clause 3.3.2.3 (no gaps in NO\_O\_ID) was executed to verify that the database was consistent..
8. Next, samples of the contents of the “success” file on the driver were compared against corresponding rows of the ORDER table to verify that records in the “success” file for committed New-Order transactions had corresponding records in the ORDER table and no entries existed for rolled back transactions.
9. Finally, step 1 was repeated to determine the total number of orders (count2). Count2 minus count1 was not less than the number of committed New-Order records in the “success” file.





## 4.

### *Clause 4: Scaling & Database Population*

#### 4.1. Initial Cardinality of Tables

*The Cardinality (e.g., the number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted (see Clause 4.2.2 and the Auditor's attestation letter) the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.*

The TPC-C database for this test was configured with 1,470 warehouses. The cardinality of each table in the database is listed in Table 4.1

**Table 4.1: Initial Cardinality of Database Table**

| Table      | Occurrences |
|------------|-------------|
| Warehouse  | 1,530       |
| District   | 15,300      |
| Customer   | 45,900,000  |
| History    | 45,900,000  |
| Order      | 45,900,000  |
| New-Order  | 13,770,000  |
| Order Line | 459,001,971 |
| Stock      | 153,000,000 |
| Item       | 100,000     |

60 rows were deleted from the warehouse table before executing the measurement runs.

#### 4.2. Constant Values

The following values were used as the constant C input values to the NURand function during Build and Run time for this implementation.

**Table 4.2: Constant C for NURand**

| Function       | Value |
|----------------|-------|
| C_LAST (Build) | 123   |
| C_LAST (Run)   | 208   |

### 4.3. Database Layout

*The distribution of tables and logs across all media must be explicitly depicted for the tested and priced systems.*

Tables 4.3, 4.4 and 4.5 list the distribution of the database over 196 disks and the transaction log over six mirrored pairs of disks for the benchmark configuration. In addition, there was one disk containing Windows NT Enterprise Edition and SQL Server Enterprise Edition code and the Master database plus the paging file. Database backup used an extra 16 disks. These 16 backup disks were excluded from the priced configuration.

### 4.4. DBMS: Data Model and DBMS Interface/Access Language

*A statement must be provided that describes:*

1. *The data model implemented by the DBMS used (e.g., relational, network, hierarchical).*
2. *The database interface (e.g., embedded, call level) and access language (e.g., SQL, DLI, COBOL, read/write) used to implement the TPC-C transactions. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server Enterprise Edition 7.0 is a relational DBMS.

The client software interfaced to SQL Server through Stored Procedures invoked through Remote Procedure Calls embedded in the C application code. Specifically, DBLIB and TCP/IP sockets were used.

### 4.5. DBMS Partitions/Replications

*The mapping of database partitions/replications must be explicitly described.*

No table partitioning or replication was done.

### 4.6. DBMS Space Requirements

*Details of the 180 day space computation along with proof that the database is configured to sustain 8 hours of growth for dynamic tables (Order, Order-line, and History) must be disclosed (see Clause 4.2.3).*

Appendix E lists the space requirements for the 180-day space as well as the logical log space for eight hours.

Table 4.3: Disk Cage Configuration

| Disk Cage Configuration for QR2 |         |       |       |       |       |       |       |     |        |    |
|---------------------------------|---------|-------|-------|-------|-------|-------|-------|-----|--------|----|
| Adapter                         | Channel | Id    | Id    | Id    | Id    | Id    | Id    | Id  | Rack # |    |
| 1                               | 0       | 0     | 1     | 2     | 3     | 4     | 5     | 6   | 1      |    |
|                                 |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB |        |    |
|                                 | 8       | 9     | 10    | 11    | 12    | 13    | 14    | 2   |        |    |
|                                 |         | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   |     |        |    |
|                                 | 1       | 0     | 1     | 2     | 3     | 4     | 5     | 6   | 3      |    |
|                                 |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB |        |    |
|                                 | 8       | 9     | 10    | 11    | 12    | 13    | 14    | 4   |        |    |
|                                 |         | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   |     |        |    |
|                                 | 2       | 0     | 0     | 1     | 2     | 3     | 4     | 5   | 6      | 5  |
|                                 |         |       | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB | 4GB    |    |
|                                 |         | 8     | 9     | 10    | 11    | 12    | 13    | 14  | 6      |    |
|                                 |         |       | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB |        |    |
|                                 |         | 1     | 0     | 1     | 2     | 3     | 4     | 5   | 6      | 7  |
|                                 |         |       | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB | 4GB    |    |
| 8                               |         | 9     | 10    | 11    | 12    | 13    | 14    | 8   |        |    |
|                                 |         | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   |     |        |    |
| 2                               |         | 0     | 1     | 2     | 3     | 4     | 5     | 6   | 9      |    |
|                                 |         | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   |     |        |    |
| 8                               |         | 9     | 10    | 11    | 12    | 13    | 14    | 10  |        |    |
|                                 |         | empty | empty | empty | empty | empty | empty |     |        |    |
| 3                               |         | 0     | 0     | 1     | 2     | 3     | 4     | 5   | 6      | 11 |
|                                 |         |       | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB | 4GB    |    |
|                                 | 8       | 9     | 10    | 11    | 12    | 13    | 14    | 12  |        |    |
|                                 |         | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   |     |        |    |
|                                 | 1       | 0     | 1     | 2     | 3     | 4     | 5     | 6   | 13     |    |
|                                 |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB |        |    |
|                                 | 8       | 9     | 10    | 11    | 12    | 13    | 14    | 14  |        |    |
|                                 |         | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   |     |        |    |
|                                 | 2       | 0     | 1     | 2     | 3     | 4     | 5     | 6   | *      |    |
|                                 |         | empty | empty | empty | empty | empty | empty |     |        |    |
|                                 | 4       | 0     | 0     | 1     | 2     | 3     | 4     | 5   | 6      | 13 |
|                                 |         |       | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB | empty  |    |
|                                 |         | 1     | 0     | 1     | 2     | 3     | 4     | 5   | 6      | 14 |
|                                 |         |       | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB | empty  |    |
| 5                               |         | 0     | 1     | 2     | 3     | 4     | 5     | 6   | 15     |    |
|                                 |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB |        |    |
| 8                               |         | 9     | 10    | 11    | 12    | 13    | 14    | 16  |        |    |
|                                 |         | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   |     |        |    |
| 1                               |         | 0     | 1     | 2     | 3     | 4     | 5     | 6   | 17     |    |
|                                 |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB |        |    |
| 8                               |         | 9     | 10    | 11    | 12    | 13    | 14    | 18  |        |    |
|                                 |         | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   |     |        |    |

### Disk Cage Configuration for QR/2

| Adapter | Channel | Id    | Id    | Id    | Id    | Id    | Id    | Id    | Id    | Id | Rack # |    |
|---------|---------|-------|-------|-------|-------|-------|-------|-------|-------|----|--------|----|
| 6       | 0       | 0     | 1     | 2     | 3     | 4     | 5     | 6     |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        | 19 |
|         |         | 8     | 9     | 10    | 11    | 12    | 13    | 14    |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   |    |        | 20 |
|         |         | ..... | ..... | ..... | ..... | ..... | ..... | ..... | ..... |    |        |    |
|         |         | 1     | 1     | 2     | 3     | 4     | 5     | 6     |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        | 21 |
|         | 8       | 8     | 9     | 10    | 11    | 12    | 13    | 14    |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        | 22 |
|         |         | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   | 9GB   |       |    |        |    |
|         |         | ..... | ..... | ..... | ..... | ..... | ..... | ..... |       |    |        |    |
|         |         | 1     | 1     | 2     | 3     | 4     | 5     | 6     |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   | 9GB   |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   | 9GB   |       |    |        | 22 |
| 7       | 0       | 0     | 1     | 2     | 3     | 4     | 5     | 6     |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        | 23 |
|         |         | 8     | 9     | 10    | 11    | 12    | 13    | 14    |       |    |        |    |
|         |         | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   |    |        | 24 |
|         |         | ..... | ..... | ..... | ..... | ..... | ..... | ..... | ..... |    |        |    |
|         |         | 1     | 1     | 2     | 3     | 4     | 5     | 6     |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        | 25 |
|         | 8       | 8     | 9     | 10    | 11    | 12    | 13    | 14    |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        | 26 |
|         |         | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   | 9GB   |    |        |    |
|         |         | ..... | ..... | ..... | ..... | ..... | ..... | ..... | ..... |    |        |    |
|         |         | 1     | 1     | 2     | 3     | 4     | 5     | 6     |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        | 27 |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        |    |
| 8       | 0       | 0     | 1     | 2     | 3     | 4     | 5     | 6     |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        | 27 |
|         |         | 8     | 9     | 10    | 11    | 12    | 13    | 14    |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   | 9GB   |    |        | 28 |
|         |         | ..... | ..... | ..... | ..... | ..... | ..... | ..... | ..... |    |        |    |
|         |         | 1     | 1     | 2     | 3     | 4     | 5     | 6     |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   | 4GB   |    |        | 29 |
|         | 8       | 8     | 9     | 10    | 11    | 12    | 13    | 14    |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   | 9GB   |       |    |        |    |
|         |         | ..... | ..... | ..... | ..... | ..... | ..... | ..... |       |    |        |    |
|         |         | 1     | 1     | 2     | 3     | 4     | 5     | 6     |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   | 9GB   |       |    |        |    |
|         |         | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   | 9GB   |       |    |        | 30 |
|         |         | 4GB   | 4GB   | 4GB   | 9GB   | 9GB   | 9GB   | 9GB   |       |    |        |    |

Table 4.4: RAID Adapter Disk Configuration

| RAID Adapter Disk Configuration |    |           |           |           |                               |               |
|---------------------------------|----|-----------|-----------|-----------|-------------------------------|---------------|
| Adapter                         | ID | Channel 0 | Channel 1 | Channel 2 | RAID Configuration            | Drive Letters |
| 1                               | 0  | A0        | A1        |           | Arrange Packs A - D as RAID 0 | E: and M:     |
|                                 | 1  | A2        | A3        |           |                               |               |
|                                 | 2  | A4        | A5        |           |                               |               |
|                                 | 3  | A6        | B0        |           |                               |               |
|                                 | 4  | B1        | B2        |           |                               |               |
|                                 | 5  | B3        | B4        |           |                               |               |
|                                 | 6  | B5        | B6        |           |                               |               |
|                                 | 8  | C0        | C1        |           |                               |               |
|                                 | 9  | C2        | C3        |           |                               |               |
|                                 | 10 | C4        | C5        |           |                               |               |
|                                 | 11 | C6        | D0        |           |                               |               |
|                                 | 12 | D1        | D2        |           |                               |               |
|                                 | 13 | D3        | D4        |           |                               |               |
|                                 | 14 | D5        | D6        |           |                               |               |
| 2                               | 0  | A0        | A1        | E0        | Arrange Packs A - D as RAID 0 | F: and N:     |
|                                 | 1  | A2        | A3        | E1        |                               |               |
|                                 | 2  | A4        | A5        | E2        |                               |               |
|                                 | 3  | A6        | B0        | E3        |                               |               |
|                                 | 4  | B1        | B2        | E4        |                               |               |
|                                 | 5  | B3        | B4        | E5        |                               |               |
|                                 | 6  | B5        | B6        | E6        |                               |               |
|                                 | 8  | C0        | C1        | E7        |                               |               |
|                                 | 9  | C2        | C3        |           |                               |               |
|                                 | 10 | C4        | C5        |           |                               |               |
|                                 | 11 | C6        | D0        |           |                               |               |
|                                 | 12 | D1        | D2        |           |                               |               |
|                                 | 13 | D3        | D4        |           |                               |               |
|                                 | 14 | D5        | D6        |           |                               |               |
| 3                               | 0  | A0        | A1        | E0        | Arrange Packs A - D as RAID 0 | G: and O:     |
|                                 | 1  | A2        | A3        | E1        |                               |               |
|                                 | 2  | A4        | A5        | E2        |                               |               |
|                                 | 3  | A6        | B0        | E3        |                               |               |
|                                 | 4  | B1        | B2        | E4        |                               |               |
|                                 | 5  | B3        | B4        | E5        |                               |               |
|                                 | 6  | B5        | B6        | E6        |                               |               |
|                                 | 8  | C0        | C1        | E7        |                               |               |
|                                 | 9  | C2        | C3        |           |                               |               |
|                                 | 10 | C4        | C5        |           |                               |               |
|                                 | 11 | C6        | D0        |           |                               |               |
|                                 | 12 | D1        | D2        |           |                               |               |
|                                 | 13 | D3        | D4        |           |                               |               |
|                                 | 14 | D5        | D6        |           |                               |               |

### RAID Adapter Disk Configuration

| Adapter | ID | Channel 0 | Channel 1 | Channel 2 | RAID Configuration            | Drive Letters |
|---------|----|-----------|-----------|-----------|-------------------------------|---------------|
| 5       | 0  | A0        | A1        |           | Arrange Packs A - D as RAID 0 | H: and P:     |
|         | 1  | A2        | A3        |           |                               |               |
|         | 2  | A4        | A5        |           |                               |               |
|         | 3  | A6        | B0        |           |                               |               |
|         | 4  | B1        | B2        |           |                               |               |
|         | 5  | B3        | B4        |           |                               |               |
|         | 6  | B5        | B6        |           |                               |               |
|         | 8  | C0        | C1        |           |                               |               |
|         | 9  | C2        | C3        |           |                               |               |
|         | 10 | C4        | C5        |           |                               |               |
|         | 11 | C6        | D0        |           |                               |               |
|         | 12 | D1        | D2        |           |                               |               |
|         | 13 | D3        | D4        |           |                               |               |
|         | 14 | D5        | D6        |           |                               |               |
| 6       | 0  | A0        | A1        |           | Arrange Packs A - D as RAID 0 | I: and Q:     |
|         | 1  | A2        | A3        |           |                               |               |
|         | 2  | A4        | A5        |           |                               |               |
|         | 3  | A6        | B0        |           |                               |               |
|         | 4  | B1        | B2        |           |                               |               |
|         | 5  | B3        | B4        |           |                               |               |
|         | 6  | B5        | B6        |           |                               |               |
|         | 8  | C0        | C1        |           |                               |               |
|         | 9  | C2        | C3        |           |                               |               |
|         | 10 | C4        | C5        |           |                               |               |
|         | 11 | C6        | D0        |           |                               |               |
|         | 12 | D1        | D2        |           |                               |               |
|         | 13 | D3        | D4        |           |                               |               |
|         | 14 | D5        | D6        |           |                               |               |
| 7       | 0  | A0        | A1        |           | Arrange Packs A - D as RAID 0 | J: and R:     |
|         | 1  | A2        | A3        |           |                               |               |
|         | 2  | A4        | A5        |           |                               |               |
|         | 3  | A6        | B0        |           |                               |               |
|         | 4  | B1        | B2        |           |                               |               |
|         | 5  | B3        | B4        |           |                               |               |
|         | 6  | B5        | B6        |           |                               |               |
|         | 8  | C0        | C1        |           |                               |               |
|         | 9  | C2        | C3        |           |                               |               |
|         | 10 | C4        | C5        |           |                               |               |
|         | 11 | C6        | D0        |           |                               |               |
|         | 12 | D1        | D2        |           |                               |               |
|         | 13 | D3        | D4        |           |                               |               |
|         | 14 | D5        | D6        |           |                               |               |

### RAID Adapter Disk Configuration

| Adapter | ID | Channel 0 | Channel 1 | Channel 2 | RAID Configuration            | Drive Letters                  |
|---------|----|-----------|-----------|-----------|-------------------------------|--------------------------------|
| 8       | 0  | A0        | A1        |           | Arrange Packs A - D as RAID 0 | K: and S:                      |
|         | 1  | A2        | A3        |           |                               |                                |
|         | 2  | A4        | A5        |           |                               |                                |
|         | 3  | A6        | B0        |           |                               |                                |
|         | 4  | B1        | B2        |           |                               |                                |
|         | 5  | B3        | B4        |           |                               |                                |
|         | 6  | B5        | B6        |           |                               |                                |
|         | 8  | C0        | C1        |           |                               |                                |
|         | 9  | C2        | C3        |           |                               |                                |
|         | 10 | C4        | C5        |           |                               |                                |
|         | 11 | C6        | D0        |           |                               |                                |
|         | 12 | D1        | D2        |           |                               |                                |
|         | 13 | D3        | D4        |           |                               |                                |
|         | 14 | D5        | D6        |           |                               |                                |
|         | 4  | 0         | A0        | A1        |                               | Arrange Pack A as RAID 1 (log) |
|         | 1  |           |           |           |                               |                                |
|         | 2  |           |           |           |                               |                                |
|         | 3  |           |           |           |                               |                                |
|         | 4  |           |           |           |                               |                                |
|         | 5  |           |           |           |                               |                                |
|         | 6  |           |           |           |                               |                                |

**Table 4.5: Disk Administrator Configuration**

| <b>Disk Administrator Configuration</b> |                                 |                                    |                     |
|---|---------------------------------|------------------------------------|---------------------|
| Disk 0<br>4338 MB                       | C:<br>SYSTEM<br>FAT<br>2047 MB  | Z:<br>testfiles<br>NTFS<br>2291 MB | unused<br>0 MB      |
| Disk 1<br>182308 MB                     | E:<br>unknown<br>14500 MB       | M:<br>unknown<br>6500 MB           | unused<br>161308 MB |
| Disk 2<br>151900 MB                     | F:<br>unknown<br>14500 MB       | N:<br>unknown<br>6500 MB           | unused<br>130900 MB |
| Disk 3<br>60781 MB                      | T:<br>BACK1<br>NTFS<br>60781 MB |                                    | unused<br>0 MB      |
| Disk 4<br>182308 MB                     | G:<br>unknown<br>14500 MB       | O:<br>unknown<br>6500 MB           | unused<br>161308 MB |
| Disk 5<br>60781 MB                      | U:<br>BACK2<br>NTFS<br>60781 MB |                                    | unused<br>0 MB      |
| Disk 6<br>52097 MB                      | L:<br>unknown<br>32700 MB       |                                    | unused<br>19397 MB  |
| Disk 7<br>182308 MB                     | H:<br>unknown<br>14500 MB       | P:<br>unknown<br>6500 MB           | unused<br>161308 MB |
| Disk 8<br>151900 MB                     | I:<br>unknown<br>14500 MB       | Q:<br>unknown<br>6500 MB           | unused<br>130900 MB |
| Disk 9<br>182308 MB                     | J:<br>unknown<br>14500 MB       | R:<br>unknown<br>6500 MB           | unused<br>161308 MB |
| Disk 10<br>151900 MB                    | K:<br>unknown<br>14500 MB       | S:<br>unknown<br>6500 MB           | unused<br>130900 MB |



## 5. Clause 5: Performance Metrics & Response Time

### 5.1. Measured Throughput (tpmC)

*Measured tpmC must be reported.*

The measured tpmC was 18,343.17.

### 5.2. Response Times

*Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the Menu response time.*

Table 5.1: Response Time Data

| Transaction         | Average | Maximum | 90th %ile |
|---------------------|---------|---------|-----------|
| New-Order           | 0.44    | 5.72    | 0.62      |
| Payment             | 0.27    | 4.37    | 0.43      |
| Delivery            | 0.12    | 3.13    | 0.14      |
| Stock-Level         | 2.45    | 6.23    | 3.32      |
| Order Status        | 0.32    | 2.80    | 0.47      |
| Menu                | 0.12    | 3.56    | 0.13      |
| Delivery (Deferred) | 0.56    | 3.88    | 0.84      |

### 5.3. Keying and Think Times

*The minimum, the average, and the maximum keying and think times must be reported for each transaction type.*

Table 5.2: Keying Times

| Transaction  | Minimum | Average | Maximum |
|--------------|---------|---------|---------|
| New-Order    | 18.00   | 18.01   | 18.06   |
| Payment      | 3.00    | 3.00    | 3.04    |
| Delivery     | 2.00    | 2.00    | 2.03    |
| Stock-Level  | 2.00    | 2.00    | 2.03    |
| Order Status | 2.00    | 2.00    | 2.03    |


Table 5.3: Think Times

| Transaction  | Minimum | Average | Maximum |
|--------------|---------|---------|---------|
| New-Order    | 0.00    | 12.04   | 120.30  |
| Payment      | 0.00    | 12.05   | 120.30  |
| Delivery     | 0.00    | 5.06    | 50.60   |
| Stock-Level  | 0.00    | 5.03    | 50.60   |
| Order Status | 0.00    | 10.08   | 100.71  |

## 5.4. Response Time Frequency Distribution Curves

*Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.*

**Figure 5.1: New Order Response Time Distribution**

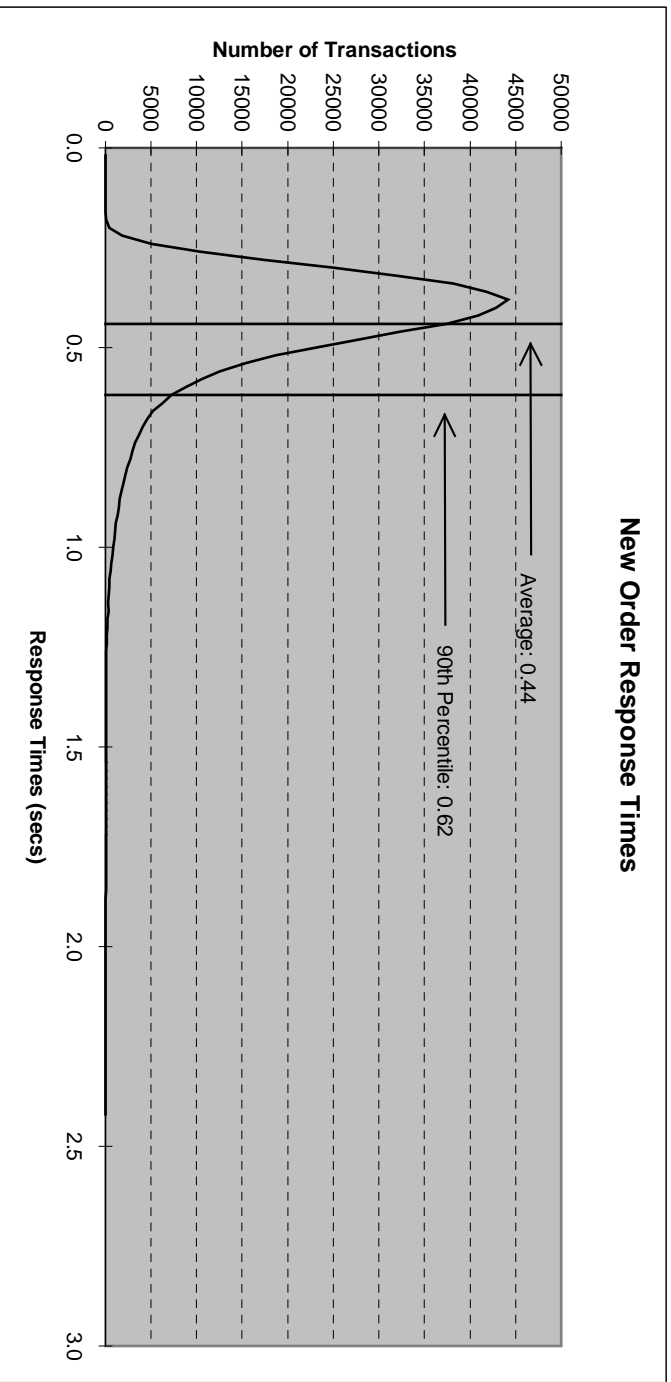

**Figure 5.2: Payment Response Time Distribution**

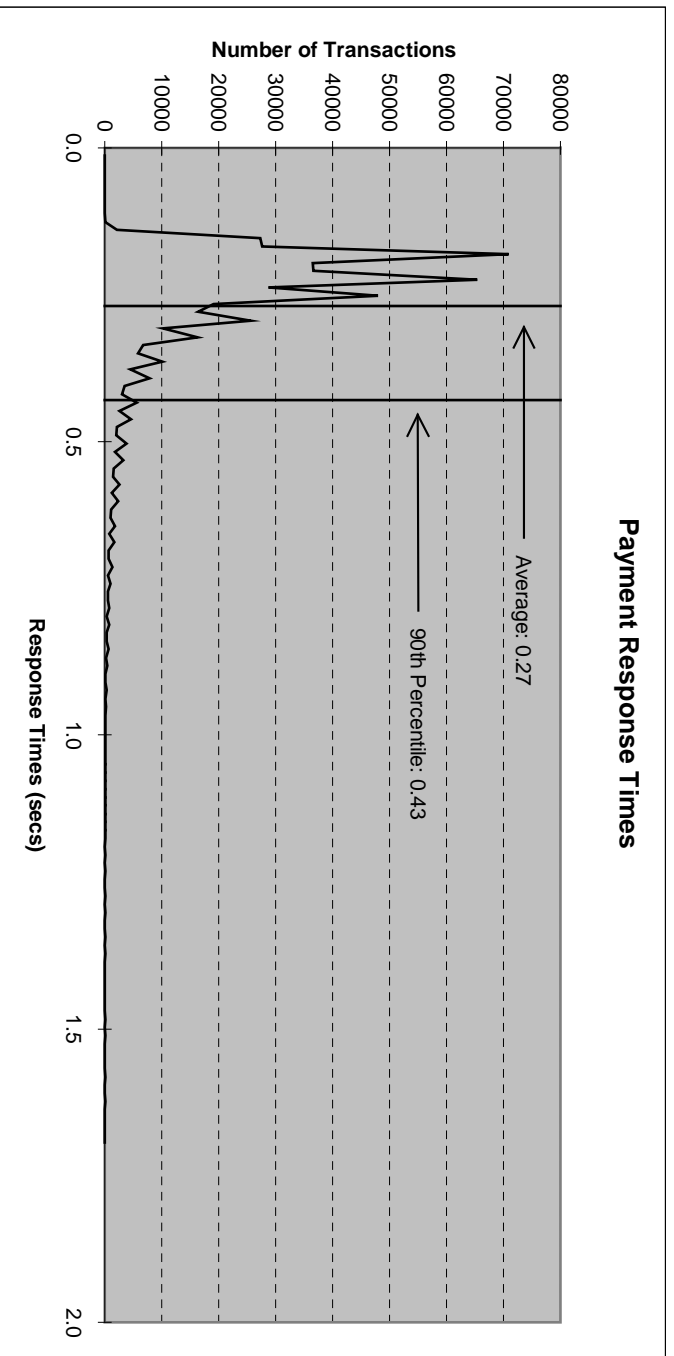


Figure 5.3: Order Status Response Time Distribution

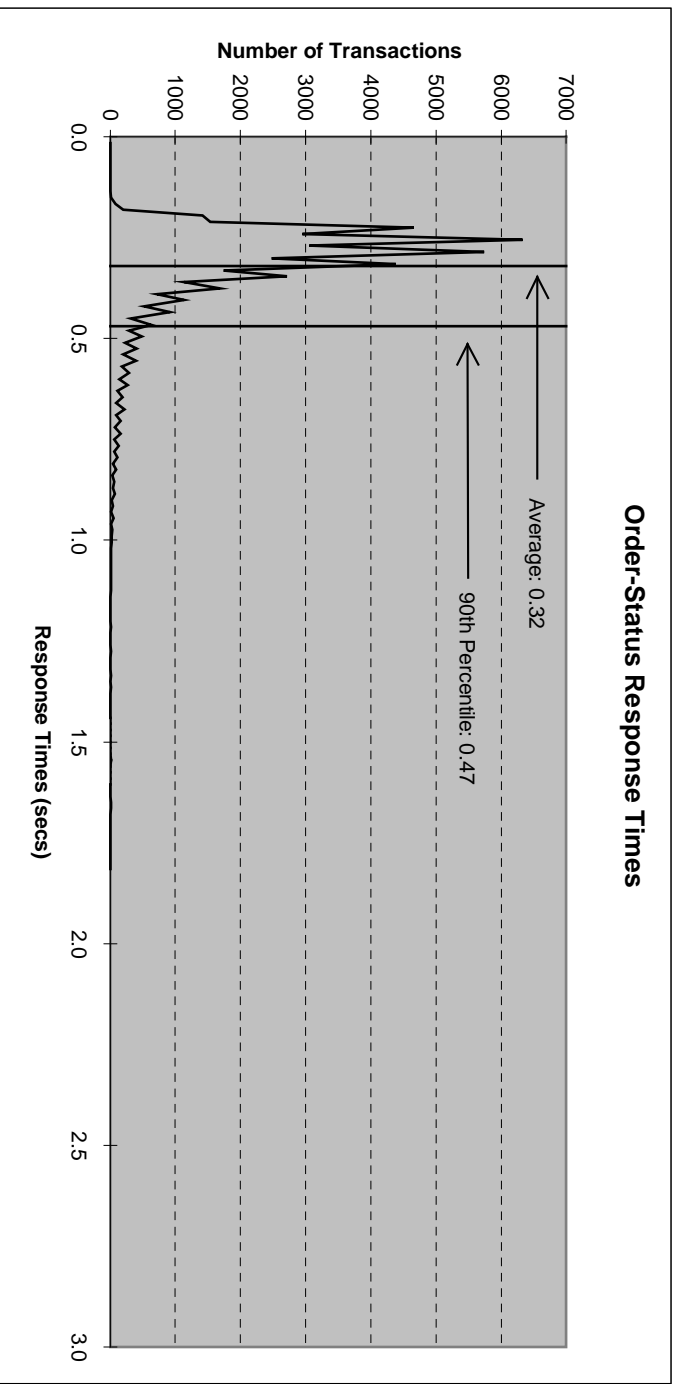


Figure 5.4: Delivery Response Time Distribution


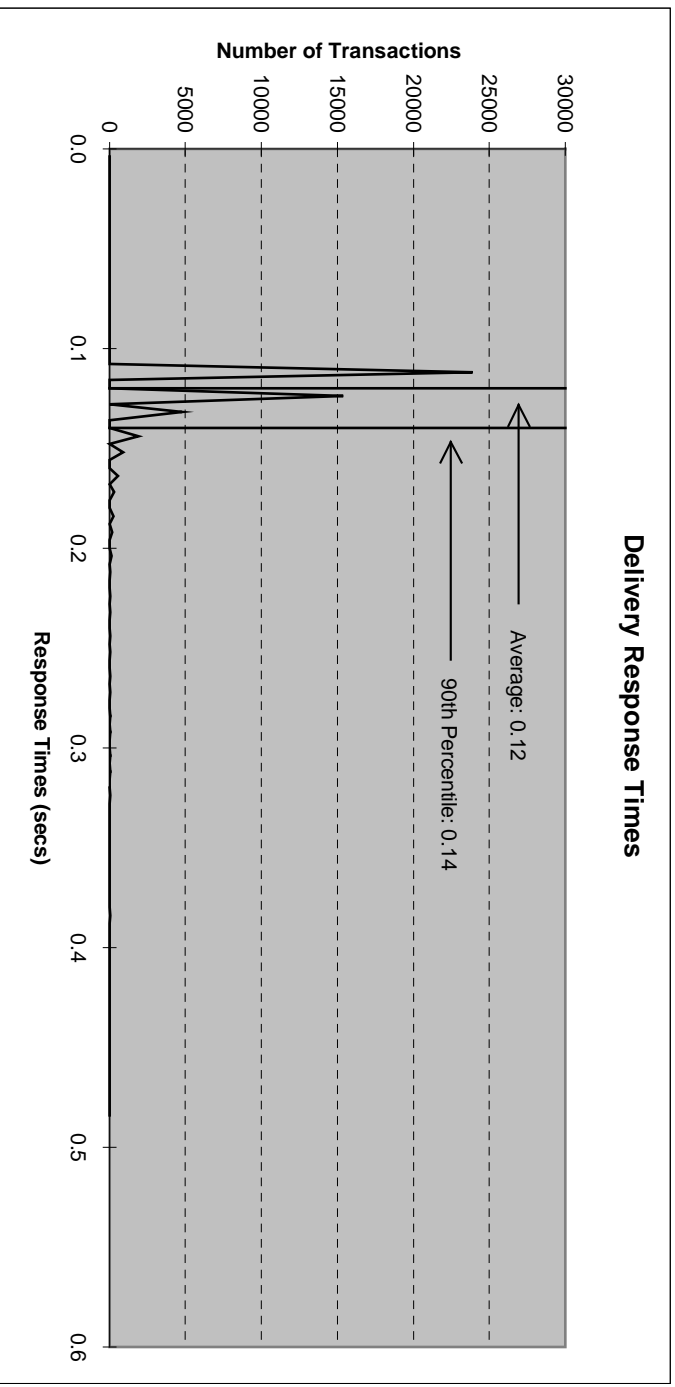



Figure 5.5: Stock Level Response Time Distribution

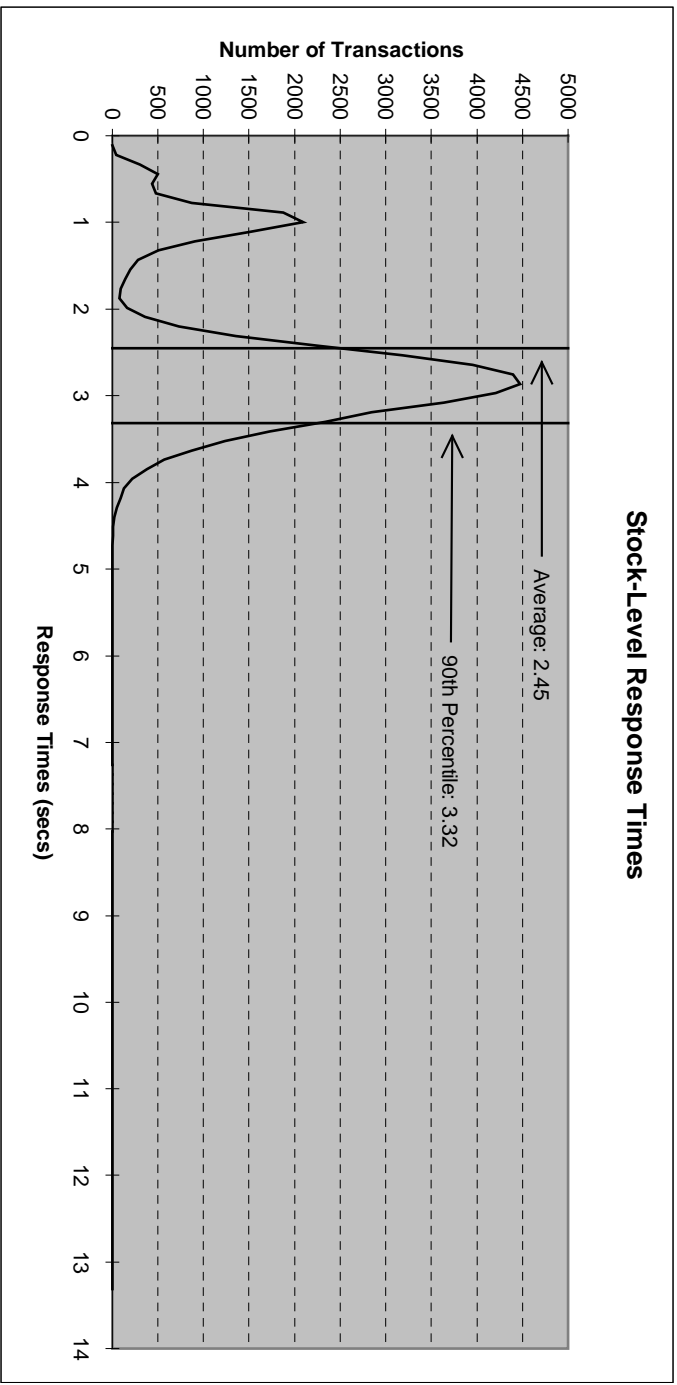

### 5.5. New Order Think Time Frequency Distribution Curve

*Think Time frequency distribution curve (see Clause 5.6.3) must be reported for the New-Order transaction.*


Figure 5.6: New Order Think Time Distribution

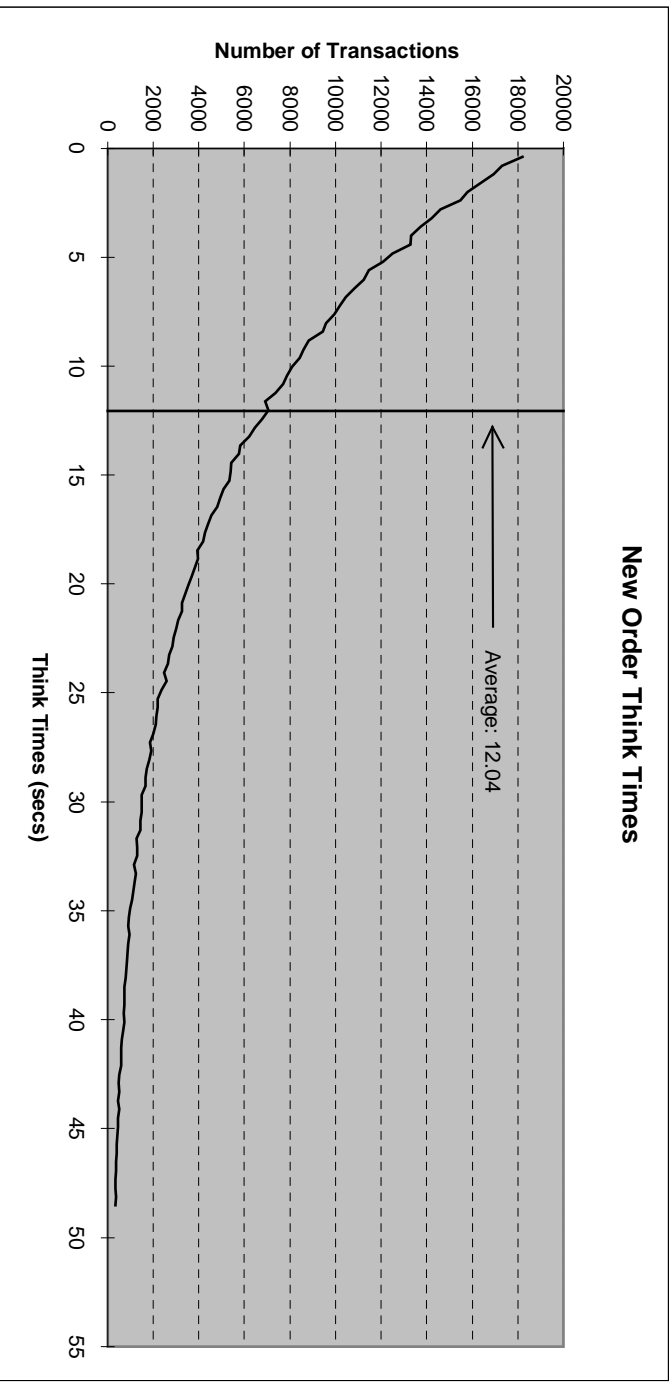

## 5.6. Response Time versus Throughput Performance Curve

*The performance curve for response times versus throughput (Clause 5.6.2) must be reported for the New-Order transaction*


**Figure 5.7: Response Time versus Throughput**

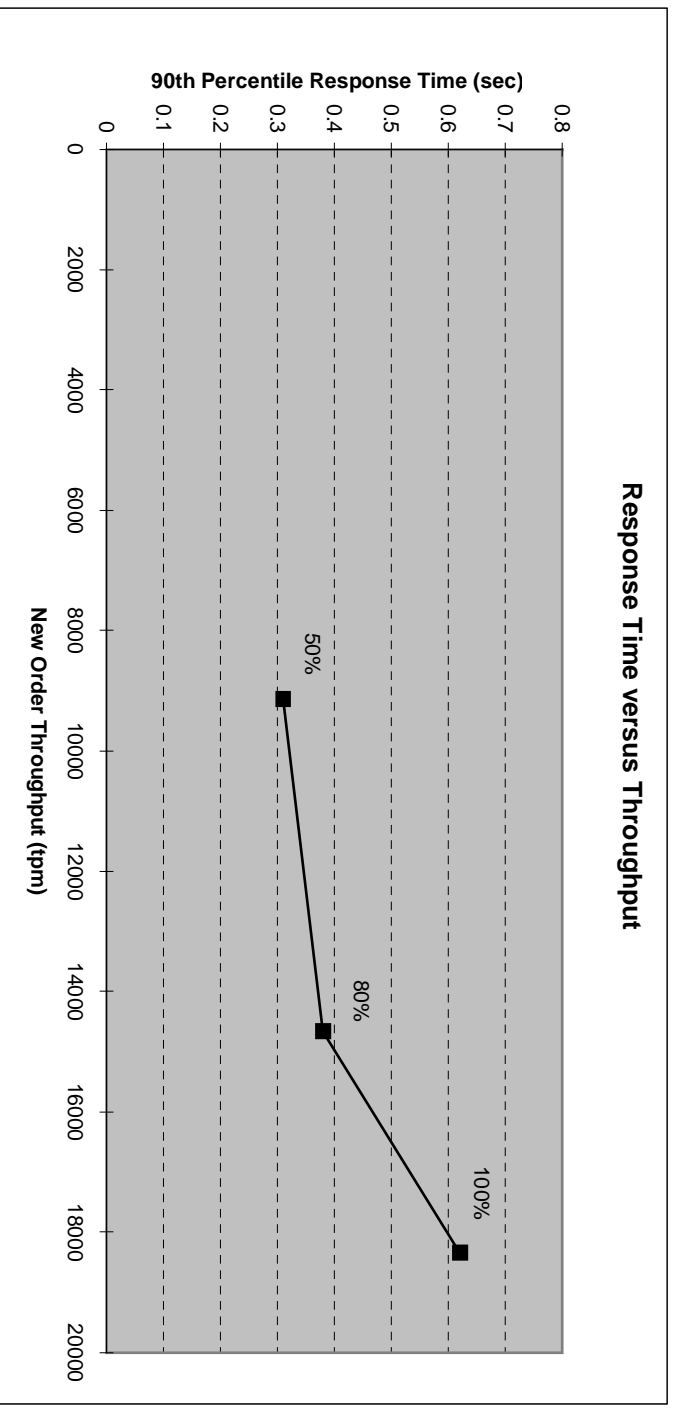

## 5.7. New-Order Throughput vs. Time

*A graph of throughput versus elapsed time (Clause 5.6.5) must be reported for the New-Order transaction.*

**Figure 5.8: Throughput (tpmC) versus Time**

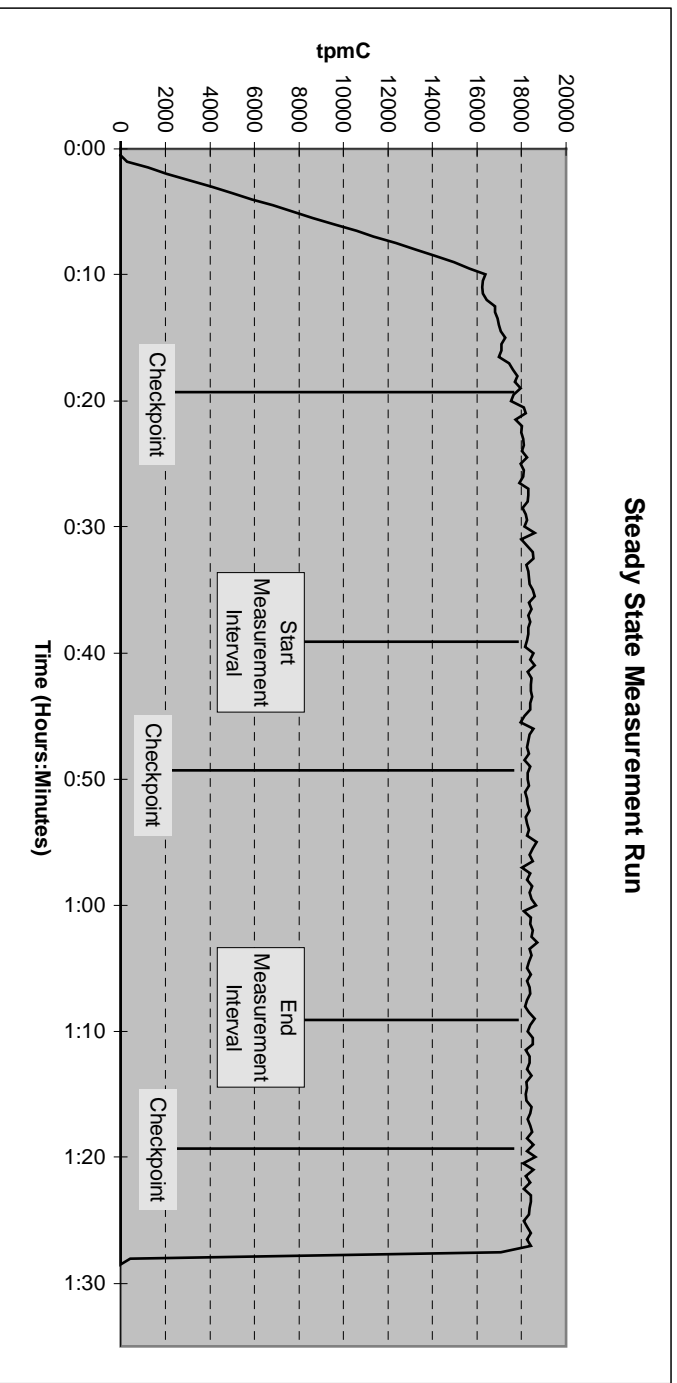

## 5.8. Determination of “Steady State”

*The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval (see Clause 5.5) must be described.*

The transaction throughput rate (tpmC) and response time were relatively constant after the initial ‘ramp up’ period. The throughput and response time behavior were determined by examining data reported for each 30-second interval over the duration of the benchmark. Ramp-up, steady state, and ramp-down regions are discernible in the graph presented in Figure 5.8.

## 5.9. Work Performed During Steady State

*A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.) actually occurred during the measurement interval must be reported.*

The RTE selects a transaction type from the menu and prepares to request the appropriate blank form. A timestamp is taken before the form request is sent and after the response is returned. The difference between the two is saved off as the menu response time. The RTE then generates input data for the transaction to create a completed form and waits the appropriate key time. A timestamp is taken before the completed form is sent and after the response is returned. The difference between these two is saved off as the transaction response time. Both response times are padded with a 0.1 second delay per spec to account for the web browser delay. The appropriate transaction data and response times are logged and the RTE waits the required think time interval before repeating the process. Each RTE driver maintains its own log file. Log file contents are consolidated for the reports.

The RTE emulates web browsers (not terminals) in this client-server implementation. The RTE sends and receives HTML formatted data using HTTP through Ethernet LANs to a client application running on the client machine. The client application processes the request, sends the transaction to a Tuxedo TPC-C application server queue, waits for the transaction response (except for delivery), and returns an appropriately formatted HTML form back to the (emulated) web browser (RTE). The Tuxedo TPC-C application server retrieves a message from its queue, invokes request processing via a stored procedure on the database server using Microsoft SQL Server DDLIB and RPC through sockets over another Ethernet LAN, accepts the response, and returns a result to the client application

(via Tuxedo). For delivery transactions, the client application does not wait for the Tuxedo TPC-C delivery server to respond. Each delivery server logs its results to its own file. The delivery report files are consolidated for reports.

To perform checkpoints at specific intervals, SQL Server's checkpoint interval was set to the maximum allowable value and a utility was written to schedule checkpoints at 30 minute intervals and record the start and end time of each checkpoint. The checkpoint script was started manually on one of the client machines after the RTE had all users logged in and sending transactions and a steady state had been achieved. Using this information, the positioning of the checkpoint within the measurement interval was verified to be clear of the guard zones.

At each checkpoint, SQL Server wrote to disk all database pages in memory that had been updated but not yet physically written to the disk. Upon completion of the checkpoint, SQL Server also wrote records to the transaction log indicating that a checkpoint had completed.

## 5.10. Reproducibility

*A description of the method used to determine the reproducibility of the measurement results must be reported.*

In a repeat test, carried out in the same manner as the primary test, a throughput of 18,339.80 tpmC was achieved on the same database during a 30-minute, steady state run. All required transaction statistics were met. See the Auditor's attestation letter for details.

## 5.11. Measurement Interval Duration

*A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.*

The measurement interval was 30 minutes.

## 5.12. Regulation of Transaction Mix

*The method of regulation of the transaction mix (e.g. card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.*

The RTE was given a weighted random distribution which could not be adjusted during the run.

## 5.13. Transaction Statistics

*The percentage of the total mix for each transaction type must be disclosed.*

*The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed.*

*The average number of order-lines entered per New-Order transaction must be disclosed.*

*The percentage of remote order-lines entered per New-Order transaction must be disclosed.*

*The percentage of remote Payment transactions must be disclosed.*

*The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed.*

*The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.*

Table 5.4 shows this information.

Table 5.4: Transaction Statistics

| Transaction Type | Statistics                            | Value  |
|------------------|---------------------------------------|--------|
| New Order        | Rolledback transactions               | 0.98%  |
|                  | Home warehouse                        | 99.00% |
|                  | Remote warehouse                      | 1.00%  |
|                  | Average Items per Order               | 10.00  |
| Payment          | Home warehouse                        | 84.94% |
|                  | Remote warehouse                      | 15.06% |
|                  | Non-primary key access                | 60.04% |
| Order Status     | Non-primary key access                | 60.08% |
| Delivery         | Skipped transactions (Interactive)    | 0      |
|                  | Skipped transaction counts (Deferred) | 0      |
|                  | Skipped District counts (Deferred)    | 0      |
| Transaction Mix  | New Order                             | 44.84% |
|                  | Payment                               | 43.09% |
|                  | Delivery                              | 4.00%  |
|                  | Stock-Level                           | 4.04%  |
|                  | Order-Status                          | 4.03%  |

## 5.14. Checkpoint Statistics

*The number of checkpoints in the measurement interval, the time in seconds from the start of the measurement interval to the first checkpoint, and the Checkpoint Interval must be disclosed.*

There is one checkpoint in the measurement interval. The checkpoint starts 614 seconds into the measurement interval. The checkpoint interval is 30 minutes (from the start of one to the start of the next) and a checkpoint lasts approximately 5 minutes. In conformance with Clause 5.2.2 there is no checkpoint within a span of 7.5 minutes before or after the beginning or end of the measurement interval.



## **6. Clause 6: SUT, Driver & Communications Definition**

### **6.1. Remote Terminal Emulator (RTE) Description**

*The RTE input parameters, code fragments, functions, etc. used to generate each transaction input field must be disclosed.*

The RTE used is proprietary to Unisys. Appendix D contains the profile used as input to this RTE.

### **6.2. Emulated Components**

*It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to that of the priced system.*

There were no emulated components in the benchmark configuration other than the emulated web browsers on the users' PCs.

### **6.3. Functional Diagrams**

*A complete functional diagram of both benchmark and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.*

Section 0.7 describes and shows functional diagrams of the benchmarked and priced systems.

### **6.4. Network Configuration**

*The network configuration of both the tested and proposed (target) services which are being represented and a thorough explanation of exactly which parts are being replaced with the Driver System must be disclosed.*

Figures 0.1 and 0.2 in Section 0.7 also diagram the network configurations of the benchmark and configured systems and represent the RTEs connected via LAN replacing the user PCs that are directly connected via LAN.

### **6.5. Network Bandwidth**

*The bandwidth of the network(s) used in the tested/priced configuration must be disclosed.*

Ethernet local area networks (LAN) are used in the priced and tested configurations. The database server (SUT) contains a single 10/100 megabit per second LAN adapter connecting it to the client systems. This LAN segment is run at 100 megabits per second in both the priced and tested configuration.

Each client contains two 10/100 megabit per second LAN adapters and one quad LAN adapter that supports four 10/100 megabit per second LAN segments. One 10/100 megabit per second LAN adapter connects to a LAN segment that communicates with the SUT at 100 megabits per second in both the priced and tested configuration.

All other LAN adapters are connected to LAN segments running at 10 megabits per second in both the priced and tested configurations.

In the priced configuration, each client is connected to workstations (PCs running web browsers) spread over five 10 megabit per second LAN segments.

In the tested configuration, each client is connected to RTE driver systems emulating web browsers spread over five 10 megabit per second LAN segments.

## **6.6. Operator Intervention**

*If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.*

No operator intervention was required to sustain eight hours of operation at the reported throughput.

## **7.**

## ***Clause 7: Pricing***

### **7.1. Pricing**

*A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source(s) and effective date(s) must also be reported.*

*The total 5-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.*

*System pricing should include subtotals for the following components: Server Hardware, Server Software, Client Hardware, Client Software, and Network Components used for terminal connection (see Clause 7.2.2.3). Clause 6.1 describes the Server and Client components.*

*System pricing must include line item indication where non-sponsoring companies' brands are used. System pricing must also include line item indication of third party pricing.*

*A detailed list of hardware and software components along with their part numbers and prices are given in the Executive Summary near the beginning of this document.*

### **7.1.1. System Pricing**

Each priced configuration consists of an integrated system package, additional options, and components. Prices for all products are US list prices. A three year warranty is standard with this class of Unisys server products.

### **7.1.2. Maintenance Pricing**

The five year support pricing for Unisys Corporation Open Business Server products is based on a 36-month warranty on hardware and 24 months of monthly support. Microsoft and BEA support pricing is based on 60 months of monthly support costs.

Unisys Corporation Standard Performance-Gold Support: four hour maximum response, onsite support for hardware provides service from 8:00 A.M. to 5:00 P.M., Monday through Friday. Service requests made as late as 5:00 P.M. will receive a response the same day.

Netlux and Data Comm Warehouse provide return-to-factory replacement within seven days. Server disks are covered by Western Micro's seven day return-to-factory warranty. Appropriate spares are included in the priced configuration.

### **7.1.3. Discounts**

Western Micro provides a standard dollar-volume discount to the client, server and storage components of the priced configuration.

## 7.2. Availability

*The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system includes products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.*

The hardware, software and support/maintenance products priced in this benchmark are detailed on page vi.

Microsoft SQL Server Enterprise Edition 7.0 will be available by December 29, 1998. All other components are available.

## 7.3. Measured tpmC, Price/Performance, and Availability Date

*A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.*

Unisys Corporation Aquanta QR/2 Server, with Microsoft Windows NT Server Enterprise Edition 4.0 and SQL Server Enterprise Edition 7.0, achieved 18,343.17 tpmC at \$24.83 per tpmC. All components will be available by December 29, 1998.

## 7.4. Country-Specific Pricing

*Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7.*

None.

## 7.5. Usage Pricing

*For any usage pricing, the sponsor must disclose:*

- *Usage level at which the component was priced.*
- *A statement of the company policy allowing such pricing.*

The component pricing based on usage is shown below:

- One (1) Microsoft Windows NT Server Enterprise Edition 4.0 license
- One (1) Microsoft SQL 7.0 Server Enterprise Edition license
- Three (3) Microsoft Windows NT Server 4.0 Licenses
- One (1) Microsoft Visual C++ Professional 5.0
- Three (3) BEA Tuxedo 6.3 CFS for NT licenses

Microsoft SQL Server & Internet Information Server and BEA Tuxedo were priced for an unlimited number of users.

## 8.

### ***Clause 8 : Full Disclosure Availability***

#### **8.1. Availability**

*The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to charges for similar documents by that test sponsor.*

Copies of this Full Disclosure Report may be obtained by contacting:

TPC Benchmark Administrator  
Systems Analysis, Modeling & Measurement Group  
Unisys Corporation, M/S 262  
25725 Jeronimo Road  
Mission Viejo, CA 92691  
USA



## **9.**

## ***Clause 9 : Audit***

### **9.1. Auditor's Report**

*The auditor's name, address, phone number and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.*

This implementation of the TPC Benchmark C on the Unisys Aquanta QR/2 Server was audited by Richard Gimarc, a TPC certified auditor of:

Performance Metrics Inc.,  
2229 Benita Drive, Suite 101,  
Rancho Cordova, CA 95670.

(916) 635-2822 Fax: (916) 858-0109  
e-mail: Richard@PerfMetrics.com

The attestation letter is shown on the next page.

**PERFORMANCE METRICS INC.**  
**TPC Certified Auditors**

---

November 4, 1998

Jerrold Buggert  
Director of Modeling and Measurement  
Unisys Corporation  
25725 Jeronimo Road  
Mission Viejo, CA 92691

I have verified remotely the TPC Benchmark™ C for the following configuration:

Platform: Unisys Aquanta QR/2 Server  
Database Manager: Microsoft SQL Server Enterprise Edition 7.0  
Operating System: Microsoft Windows NT Server Enterprise Edition 4.0 (SP4)  
Transaction Manager: BEA TUXEDO CFS 6.3 for NT

| CPU's                              | Memory                           | Disks                          | New-Order<br>Response Time<br>@ 90% | tpmC      |
|------------------------------------|----------------------------------|--------------------------------|-------------------------------------|-----------|
| Server: Unisys Aquanta QR/2 Server |                                  |                                |                                     |           |
| 4 Pentium II Xeon<br>@ 400 MHz     | Main: 4 GB<br>L2 Cache: 1 MB     | 120 @ 4.23 GB<br>105 @ 8.48 GB | 0.62 sec.                           | 18,343.17 |
| 3 Clients: Unisys Aquanta GPS      |                                  |                                |                                     |           |
| 2 Pentium II<br>@ 300 MHz          | Main: 256 MB<br>L2 Cache: 512 KB | 1 @ 2.02 GB                    | n/a                                 | n/a       |

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database was properly sized and populated.
- The database was properly scaled with 1,530 warehouses. Only 1,470 warehouses were used during measurement.
- The ACID properties were met.
- The durability data loss and log loss tests were performed on a 10-warehouse database.

---

2229 Benita Drive, Suite 101, Rancho Cordova, CA 95670  
(916) 635-2822 Fax: (916) 858-0109 e-mail: Richard@PerfMetrics.com

Page 1




**PERFORMANCE METRICS INC.**  
**TPC Certified Auditors**

---

- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was configured on the priced system.
- Eight hours of dynamic table growth space was configured on the measured system.
- The following server disks contained backup and other data and were not active during measurement: sixteen 8.48 GB disks. These 16 disks were not included in the priced configuration.
- The 180-day space calculation was verified. Sufficient storage space was configured on the measured system to satisfy this requirement.
- Measurement cycle times included a 01 second menu and a 0.1 second response time delay for an emulated Web browser.
- The steady state portion of the test was 30 minutes.
- One checkpoint was taken during the steady state portion of the test.
- Checkpoints were verified to be clear of the guard zones.
- There were 14,700 user contexts present on the system.
- Each emulated user started with a different random number seed.
- The NURand constants used for database load and at run time were verified.
- System pricing was checked for major components and maintenance.

Additional Audit Notes: (none)

Regards,



Richard L. Gimarc  
Auditor

---

2229 Benita Drive, Suite 101, Rancho Cordova, CA 95670  
(916) 635-2822 Fax: (916) 858-0109 e-mail: Richard@PerfMetrics.com

Page 2



# Appendix A - Client/Server Source

## CLIENT MAKEFILE

```
# Microsoft Developer Studio Generated NMAKE File, Format Version 4.20
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

!IF "$(CFG)" == ""
CFG=tpcc - Win32 Debug
!MESSAGE No configuration specified. Defaulting to tpcc - Win32 Debug.
!ENDIF

!IF "$(CFG)" != "tpcc - Win32 Release" && "$(CFG)" != "tpcc - Win32 Debug"
!MESSAGE Invalid configuration "$(CFG)" specified.
!MESSAGE You can specify a configuration when running NMAKE on this
makefile
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc.mak" CFG="tpcc - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc - Win32 Release" (based on "Win32 (x86) Dynamic-Link
Library")
!MESSAGE "tpcc - Win32 Debug" (based on "Win32 (x86) Dynamic-Link
Library")
!MESSAGE
!ERROR An invalid configuration is specified.
!ENDIF

!IF "$(OS)" == "Windows_NT"
NULL=
!ELSE
NULL=nul
!ENDIF
#####
#####
# Begin Project
# PROP Target_Last_Scanned "tpcc - Win32 Release"
CPP=cl.exe
RSC=rc.exe
MTL=mktyplib.exe

!IF "$(CFG)" == "tpcc - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"

# PROP BASE Intermediate_Dir "Release"
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir "Release"
# PROP Intermediate_Dir "Release"
# PROP Target_Dir ""
OUTDIR=.\\Release
INTDIR=.\\Release

ALL : "$(OUTDIR)\tpcc.dll"

CLEAN :
-@erase "$(INTDIR)\diagio.obj"
-@erase "$(INTDIR)\term.obj"
-@erase "$(INTDIR)\timesupp.obj"
-@erase "$(INTDIR)\tmon.obj"
-@erase "$(INTDIR)\TPCC.OBJ"
-@erase "$(INTDIR)\tpccchandler.obj"
-@erase "$(OUTDIR)\tpcc.dll"
-@erase "$(OUTDIR)\tpcc.exp"
-@erase "$(OUTDIR)\tpcc.lib"

"$(OUTDIR)" :
if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR)"

# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
" WINDOWS" /YX /c
# ADD CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /YX
/c
CPP_PROJ=/nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" \
/Fp"$(INTDIR)/tpcc.pch" /YX /Fo"$(INTDIR)/" /c
CPP_OBJS=.\\Release/
CPP_SBRS=.\\.
# ADD BASE MTL /nologo /D "NDEBUG" /win32
# ADD MTL /nologo /D "NDEBUG" /win32
MTL_PROJ=/nologo /D "NDEBUG" /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$(OUTDIR)/tpcc.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib
```

```

odbccp32.lib libtux.lib libbuft.lib libtux2.lib libfml.lib libfml32.lib
libgp.lib /nologo /subsystem:windows /dll /machine:I386
# SUBTRACT LINK32 /verbose /nodefaultlib
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib\
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib\
odbccp32.lib libtux.lib libbuft.lib libtux2.lib libfml.lib libfml32.lib\
libgp.lib /nologo /subsystem:windows /dll /incremental:no\
/pdb:"$(OUTDIR)/tpcc.pdb" /machine:I386 /def:".\tpcc.def"\
/out:"$(OUTDIR)/tpcc.dll" /implib:"$(OUTDIR)/tpcc.lib"
DEF_FILE= \
    ".\tpcc.def"
LINK32_OBJS= \
    "$(INTDIR)\diagio.obj" \
    "$(INTDIR)\term.obj" \
    "$(INTDIR)\timesupp.obj" \
    "$(INTDIR)\tmon.obj" \
    "$(INTDIR)\TPCC.OBJ" \
    "$(INTDIR)\tpcchandler.obj"

"$ (OUTDIR)\tpcc.dll" : "$ (OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ELSEIF "$(CFG)" == "tpcc - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir "Debug"
# PROP Intermediate_Dir "Debug"
# PROP Target_Dir ""
OUTDIR=.\Debug
INTDIR=.\Debug

ALL : "$(OUTDIR)\tpcc.dll"

CLEAN :
    -@erase "$(INTDIR)\diagio.obj"
    -@erase "$(INTDIR)\term.obj"
    -@erase "$(INTDIR)\timesupp.obj"
    -@erase "$(INTDIR)\tmon.obj"
    -@erase "$(INTDIR)\TPCC.OBJ"
    -@erase "$(INTDIR)\tpcchandler.obj"
    -@erase "$(INTDIR)\vc40.idb"
    -@erase "$(INTDIR)\vc40.pdb"
    -@erase "$(OUTDIR)\tpcc.dll"
    -@erase "$(OUTDIR)\tpcc.exp"
    -@erase "$(OUTDIR)\tpcc.ilk"
    -@erase "$(OUTDIR)\tpcc.lib"
    -@erase "$(OUTDIR)\tpcc.pdb"

"$ (OUTDIR)" :
    if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR)"

```

```

# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
"_WINDOWS" /YX /c
# ADD CPP /nologo /MT /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
"_WINDOWS" /YX /c
CPP_PROJ=/nologo /MT /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
"_WINDOWS"\
    /Fp"$(INTDIR)/tpcc.pch" /YX /Fo"$(INTDIR)/" /Fd"$(INTDIR)/" /c
CPP_OBJS=.\Debug\
CPP_SBRS=.\.
# ADD BASE MTL /nologo /D "_DEBUG" /win32
# ADD MTL /nologo /D "_DEBUG" /win32
MTL_PROJ=/nologo /D "_DEBUG" /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$(OUTDIR)/tpcc.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbccp32.lib /nologo /subsystem:windows /dll /debug
/machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbccp32.lib libtux.lib libbuft.lib libtux2.lib libfml.lib libfml32.lib
libgp.lib /nologo /subsystem:windows /dll /debug /machine:I386
# SUBTRACT LINK32 /verbose /nodefaultlib
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib\
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib\
odbccp32.lib libtux.lib libbuft.lib libtux2.lib libfml.lib libfml32.lib\
libgp.lib /nologo /subsystem:windows /dll /incremental:yes\
/pdb:"$(OUTDIR)/tpcc.pdb" /debug /machine:I386 /def:".\tpcc.def"\
/out:"$(OUTDIR)/tpcc.dll" /implib:"$(OUTDIR)/tpcc.lib"
DEF_FILE= \
    ".\tpcc.def"
LINK32_OBJS= \
    "$(INTDIR)\diagio.obj" \
    "$(INTDIR)\term.obj" \
    "$(INTDIR)\timesupp.obj" \
    "$(INTDIR)\tmon.obj" \
    "$(INTDIR)\TPCC.OBJ" \
    "$(INTDIR)\tpcchandler.obj"

"$ (OUTDIR)\tpcc.dll" : "$ (OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ENDIF

.c{$ (CPP_OBJS)}.obj :
    $(CPP) $(CPP_PROJ) $<

.cpp{$ (CPP_OBJS)}.obj :
    $(CPP) $(CPP_PROJ) $<

.cxx{$ (CPP_OBJS)}.obj :

```

```

$(CPP) $(CPP_PROJ) $<
.c{$(CPP_SBRS)}.sbr:
$(CPP) $(CPP_PROJ) $<
.cpp{$(CPP_SBRS)}.sbr:
$(CPP) $(CPP_PROJ) $<
.cxx{$(CPP_SBRS)}.sbr:
$(CPP) $(CPP_PROJ) $<

#####
#####
# Begin Target

# Name "tpcc - Win32 Release"
# Name "tpcc - Win32 Debug"

!IF "$(CFG)" == "tpcc - Win32 Release"
!ELSEIF "$(CFG)" == "tpcc - Win32 Debug"
!ENDIF

#####
#####
# Begin Source File

SOURCE=.\term.c
DEP_CPP_TERM=\
    ".\diagio.h"\
    ".\term.h"\
    ".\timesupp.h"\

"$ (INTDIR)\term.obj" : $(SOURCE) $(DEP_CPP_TERM_) "$ (INTDIR) "

# End Source File
#####
#####
# Begin Source File

SOURCE=.\timesupp.c
DEP_CPP_TIMES=\
    ".\timesupp.h"\

"$ (INTDIR)\timesupp.obj" : $(SOURCE) $(DEP_CPP_TIMES) "$ (INTDIR) "

# End Source File
#####
#####
# Begin Source File

SOURCE=.\TPCC.C
DEP_CPP_TPCC=\
    ".\diagio.h"\
    ".\term.h"\

```

```

    ".\tmon.h"\
    ".\tpcc.h"\
    ".\tpcchandler.h"\

"$ (INTDIR)\TPCC.OBJ" : $(SOURCE) $(DEP_CPP_TPCC_) "$ (INTDIR) "

# End Source File
#####
#####
# Begin Source File

SOURCE=.\tpcchandler.c
DEP_CPP_TPCCH=\
    ".\diagio.h"\
    ".\term.h"\
    ".\tmon.h"\
    ".\tpcc.h"\
    ".\tpcchandler.h"\

"$ (INTDIR)\tpcchandler.obj" : $(SOURCE) $(DEP_CPP_TPCCH) "$ (INTDIR) "

# End Source File
#####
#####
# Begin Source File

SOURCE=.\tpcc.def

!IF "$(CFG)" == "tpcc - Win32 Release"
!ELSEIF "$(CFG)" == "tpcc - Win32 Debug"
!ENDIF

# End Source File
#####
#####
# Begin Source File

SOURCE=.\tmon.c
DEP_CPP_TMON=\
    ".\tmon.h"\
    {$ (INCLUDE) }\atmi.h\
    {$ (INCLUDE) }\sys\types.h\
    {$ (INCLUDE) }\tmenv.h\

"$ (INTDIR)\tmon.obj" : $(SOURCE) $(DEP_CPP_TMON_) "$ (INTDIR) "

# End Source File
#####
#####
# Begin Source File

SOURCE=.\diagio.c

```

```

DEP_CPP_DIAGI=\
    ".\diagio.h\"

"$ (INTDIR)\diagio.obj" : $(SOURCE) $(DEP_CPP_DIAGI) "$ (INTDIR) "

# End Source File
# End Target
# End Project
#####
#####

                tpcc.def

EXPORTS
    GetExtensionVersion
    HttpExtensionProc

                tpcc.h

// tpcc.h

#include <time.h>

// TPCCHandler return codes
#define TPCCSEND 1
#define TPCCSENDEND 2
#define TPCCENDNOW 3

// TPCC Service return codes
#define SVC_BADITEMID 1
#define SVC_NOERROR 0
#define SVCERR_DEADLOCK -1
#define SVCERR_NOCUSTOMER -2
#define SVCERR_NOORDERS -3
#define SVCERR_DBLIB -4

// Min/Max transaction data definitions
#define MIN_Did 1
#define MAX_Did 10
#define MIN_OL 5
#define MAX_OL 15
#define MIN_QUANTITY 1
#define MAX_QUANTITY 10
#define MIN_ITEM_ID 1
#define MAX_ITEM_ID 10000
#define MIN_CUST_ID 1
#define MAX_CUST_ID 3000
#define MIN_CARRIER 1
#define MAX_CARRIER 10
#define MIN_THRESHOLD 10
#define MAX_THRESHOLD 20

// pTPCC->iStatusId codes
#define INVALID_IID 1
#define STATUS_OK 0
#define ERR_CMD_UNKNOWN -10

```

```

#define ERRTXT_CMD_UNKNOWN "Unrecognized Command"
#define ERR_ALREADY_LOGGEDIN -11
#define ERRTXT_ALREADY_LOGGEDIN "Already Logged In"
#define ERR_TERMID -12
#define ERRTXT_TERMID "TermId or SyncId in Error"
#define ERR_FORM_UNKNOWN -13
#define ERRTXT_FORM_UNKNOWN "Unrecognized FormId"
#define ERR_WID_INVALID -14
#define ERR_DID_INVALID -15
#define ERR_MISSING_KEY -16
#define ERR_NOT_NUMERIC -17
#define ERR_THRESHOLD_RANGE -18
#define ERR_EMBEDDED_EMPTY_OL -19
#define ERR_QUANTITY_INVALID -20
#define ERR_OL_INVALID -21
#define ERR_OL_COUNT -22
#define ERR_TM_INTERFACE -23
#define ERR_SERVICE_RSLT -24
#define ERR_INPUT_TOOLONG -25
#define ERR_IDANDNAME_EMPTY -26
#define ERR_IDANDNAME_ENTERED -27
#define ERR_AMOUNT_BADFORM -28
#define ERR_AMOUNT_INVALID -29
#define ERR_CARRIER_INVALID -30
#define ERR_TERM_ALLOC -31

#define STATUS_LEN 200
#define NAME_LEN 16
#define ADDR_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9

#define MAX_MSG_SZ 5000
#define CTEXT "Content-length: "
#define HTTPHdr "Connection: keep-alive\r\nContent-type: text/html\r\n" \
    "Content-length: \r\n\r\n"

typedef struct
{
    int year;
    int quarter;
    int month;
    int dayofyear;
    int day;
    int week;
    int weekday;
    int hour;
    int minute;
    int second;
    int millisecond;
} DBDATEREC;

typedef struct
{
    short ol_supply_w_id;
    long ol_i_id;
    char ol_i_name[25];
    short ol_quantity;
    char ol_brand_generic[2];
    double ol_i_price;
}

```

```

    double ol_amount;
    short ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    short o_ol_cnt;
    char c_last[NAME_LEN + 1];
    char c_credit[3];
    double c_discount;
    double w_tax;
    double d_tax;
    long o_id;
    short o_commit_flag;
    DBDATEREC o_entry_d;
    short o_all_local;
    double total_amount;
    char execution_status[STATUS_LEN];
    OL_NEW_ORDER_DATA Ol[MAX_OL];
} NEW_ORDER_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    DBDATEREC h_date;
    char w_street_1[ADDR_LEN + 1];
    char w_street_2[ADDR_LEN + 1];
    char w_city[ADDR_LEN + 1];
    char w_state[STATE_LEN + 1];
    char w_zip[ZIP_LEN + 1];
    char d_street_1[ADDR_LEN + 1];
    char d_street_2[ADDR_LEN + 1];
    char d_city[ADDR_LEN + 1];
    char d_state[STATE_LEN + 1];
    char d_zip[ZIP_LEN + 1];
    char c_first[NAME_LEN + 1];
    char c_middle[3];
    char c_last[NAME_LEN + 1];
    char c_street_1[ADDR_LEN + 1];
    char c_street_2[ADDR_LEN + 1];
    char c_city[ADDR_LEN + 1];
    char c_state[STATE_LEN + 1];
    char c_zip[ZIP_LEN + 1];
    char c_phone[16];
    DBDATEREC c_since;
    char c_credit[3];
    double c_credit_lim;
    double c_discount;
    double c_balance;
    char c_data[200+1];
    char execution_status[STATUS_LEN];
} PAYMENT_DATA;

```

```

typedef struct
{
    long ol_i_id;
    short ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    DBDATEREC ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    char c_first[NAME_LEN + 1];
    char c_middle[3];
    char c_last[NAME_LEN + 1];
    double c_balance;
    long o_id;
    DBDATEREC o_entry_d;
    short o_carrier_id;
    OL_ORDER_STATUS_DATA OlOrderStatusData[MAX_OL];
    short o_ol_cnt;
    char execution_status[STATUS_LEN];
} ORDER_STATUS_DATA;

typedef struct
{
    short w_id;
    short o_carrier_id;
    long o_id[10];
    int iComplete;
    SYSTEMTIME QTime; // time delivery was queued
    SYSTEMTIME EndTime; // time delivery completed
    char execution_status[STATUS_LEN];
} DELIVERY_DATA;

typedef struct
{
    short w_id;
    short d_id;
    short thresh_hold;
    long low_stock;
    char execution_status[STATUS_LEN];
} STOCK_LEVEL_DATA;

typedef struct
{
    LPVOID ConnID; // Active Connection Id
    SHORT sWId; // TPCC WareHouse Id
    SHORT sDId; // TPCC District Id
    INT iSyncId; // TPCC Sync Id
    INT iTermId; // TPCC Term Id
    UINT uFormId; // TPCC Form Id
    INT iStatusId; // TPCC Status Id
    CHAR ErrTxt[500]; // Error text
    CHAR szWork[200]; // Thread work area
    CHAR szHeader[100]; // HTTP work area
    CHAR * RecvMsg; // HTML message from ECB
}

```

```

    CHAR SendMsg[MAX_MSG_SZ];           // HTML work area
    TMON_STATE tsTMon;                 // TMon Interface
} TPCC_STATE;

```

## tpcc.c

```

// tpcc.c
//
// Copyright Unisys, 1997
//
#include <windows.h>
#include <stdio.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <winreg.h>
#include <httplib.h>

#include "tmon.h"
#include "diagio.h"
#include "term.h"
#include "tpcchandler.h"

#define EXTN_VERSION MAKEULONG(HSE_VERSION_MINOR,HSE_VERSION_MAJOR)
#define TLS_NULL 0xFFFFFFFF
DWORD dwTlsInx;
CHAR * pTitle = "IIS TPCC DLL";
CRITICAL_SECTION csDllMain;

// Diagnostic logging settings
BOOL bEventLog = TRUE;
BOOL bConsole = FALSE;
UINT uDiagLevel = DIAG_INFO;

// TMon Interface Settings
INT iTMMaxMsg = 0;

// Term Interface Settings
INT iMaxTerms = 3000;

static CHAR * szTPCCError =
    HTTPHdr "<HTML>"
    "<HEAD><TITLE>Welcome To TPC-C</TITLE></HEAD><BODY>"
    "<B>TPCC Extension Error (TPCC Array Not Allocated)</B><BR>"
    "</BODY></HTML>";

static CHAR * szTMinInitError =
    HTTPHdr "<HTML>"
    "<HEAD><TITLE>Welcome To TPC-C</TITLE></HEAD><BODY>"
    "<B>TPCC Extension Error (TMinInit Failed)</B><BR>"
    "</BODY></HTML>";
INT iHHdrLen = 0;
INT iCTextLen = 0;

BOOL ThreadAttach(TPCC_STATE * pTPCC, CHAR * pDiag);
VOID ThreadDetach(TPCC_STATE * pTPCC);
VOID SendResponse(EXTENSION_CONTROL_BLOCK * pECB, CHAR * pMsg, CHAR *
pWork);
BOOL ReadRegistry(VOID);

```

```

//=====
//
// Function name: DllMain
//
//=====
BOOL WINAPI DllMain(HANDLE hInst, ULONG ul_reason_for_call,
LPVOID lpReserved)
{
    TPCC_STATE * pTPCC = NULL;
    CHAR szDiag[MAX_DIAG_SZ];
    UINT iTMMaxSz = 0;
    switch(ul_reason_for_call)
    {
        case DLL_PROCESS_ATTACH:
            // Process initialization

            InitializeCriticalSection(&csDllMain);
            ReadRegistry();
            DiagIoInit(pTitle,bConsole,bEventLog,uDiagLevel);
            sprintf(szDiag,
                "EventLog = %d, Console = %d, DiagLevel = %d\n"
                "MaxTerms = %d\n",
                bEventLog,bConsole,uDiagLevel,iMaxTerms);
            DiagIoWrite(szDiag,DIAG_FORCE);
            dwTlsInx = TlsAlloc();
            if (dwTlsInx == TLS_NULL)
            {
                sprintf(szDiag,"Pattach(%ld): Tls Alloc Failed (%ld)\n",
                    GetCurrentThreadId(),GetLastError());
                DiagIoWrite(szDiag,DIAG_ERROR);
                return(FALSE);
            };
            if (TermInit(iMaxTerms))
                return(FALSE);
            iTMMaxSz = max(iTMMaxSz,sizeof(NEW_ORDER_DATA));
            iTMMaxSz = max(iTMMaxSz,sizeof(PAYMENT_DATA));
            iTMMaxSz = max(iTMMaxSz,sizeof(ORDER_STATUS_DATA));
            iTMMaxSz = max(iTMMaxSz,sizeof(DELIVERY_DATA));
            iTMMaxSz = max(iTMMaxSz,sizeof(STOCK_LEVEL_DATA));
            iTMMaxSz += 10;
            TMonInit(iTMMaxSz);
            iHHdrLen = strlen(HTTPHdr);
            iCTextLen = strlen(CTEXT);
            break;
        case DLL_THREAD_ATTACH:
            // Move ThreadAttach call to HttpExt since the DllMain call
            // for Thread Attach did not reliably come before the first
            // call to HttpExtProc.
            break;
        case DLL_THREAD_DETACH:
            ThreadDetach(pTPCC);
            break;
        case DLL_PROCESS_DETACH:
            ThreadDetach(pTPCC);
            DeleteCriticalSection(&csDllMain);
            TMonTerm();
            TermTerm();
            TlsFree(dwTlsInx);
            dwTlsInx = TLS_NULL;
    }
}

```



```

        DiagIoTerm();
        break;
    };
    return TRUE;
}; // DllMain

//=====
//
// Function name: ThreadAttach
//
// Result:
// FALSE Thread state structure initialized
// TRUE Thread state structure initialization failure
//
//=====
BOOL ThreadAttach(TPCC_STATE * pTPCC, CHAR * pDiag)
{
    BOOL bRslt;
    UINT uLabelNoOp;
    EnterCriticalSection(&csDllMain);
    try
    {
        pTPCC = (TPCC_STATE *) calloc(1, sizeof(TPCC_STATE));
        if (pTPCC == NULL)
        {
            sprintf(pDiag, "ThrAtt(%ld): pTPCC Alloc Failed (%ld)\n",
                GetCurrentThreadId(), GetLastError());
            DiagIoWrite(pDiag, DIAG_ERROR);
            bRslt = TRUE;
            goto TAttachXit;
        };
        TlsSetValue(dwTlsInx, pTPCC);
        pTPCC->tsTMon.pTMDData = NULL;
        pTPCC->tsTMon.pszErrTxt = pTPCC->ErrTxt;
        if (TMInit(&pTPCC->tsTMon))
        {
            sprintf(pDiag, "ThrAtt(%ld): TMInit %s\n",
                GetCurrentThreadId(), pTPCC->ErrTxt);
            DiagIoWrite(pDiag, DIAG_ERROR);
            bRslt = TRUE;
            goto TAttachXit;
        };
        bRslt = FALSE;
    TAttachXit:
        uLabelNoOp = 0;
    }
    finally
    {
        LeaveCriticalSection(&csDllMain);
    };

    return(bRslt);
}; // ThreadAttach

//=====
//
// Function name: ThreadDetach
//
//=====

```

```

VOID ThreadDetach(TPCC_STATE * pTPCC)
{
    EnterCriticalSection(&csDllMain);
    try
    {
        pTPCC = TlsGetValue(dwTlsInx);
        if (pTPCC != NULL)
        {
            TMDone(&pTPCC->tsTMon);
            free(pTPCC);
            pTPCC = NULL;
            TlsSetValue(dwTlsInx, pTPCC);
        };
    }
    finally
    {
        LeaveCriticalSection(&csDllMain);
    };
}; // ThreadDetach

//=====
//
// Function name: GetExtensionVersion
//
//=====
BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO *pVersion)
{
    pVersion->dwExtensionVersion = EXTN_VERSION;
    strncpy(pVersion->lpszExtensionDesc, pTitle, HSE_MAX_EXT_DLL_NAME_LEN);
    return TRUE;
}; // GetExtensionVersion

//=====
//
// Function name: HttpExtensionProc
//
// Returns:
// HSE_STATUS_SUCCESS send msg, drop connection
// HSE_STATUS_SUCCESS_AND_KEEP_CONN send msg, keep connection
//
//=====
DWORD WINAPI HttpExtensionProc(EXTENSION_CONTROL_BLOCK * pECB)
{
    TPCC_STATE * pTPCC;
    DWORD dwRslt = HSE_STATUS_SUCCESS;
    UINT uRslt;

    pTPCC = TlsGetValue(dwTlsInx);
    if (pTPCC == NULL)
    {
        CHAR szWork[200];
        ThreadAttach(pTPCC, szWork);
        pTPCC = TlsGetValue(dwTlsInx);
        if (pTPCC == NULL)
        {
            SendResponse(pECB, szTPCCError, szWork);
            goto HttpXit;
        };
    };
};

```

```

if (pTPCC->tsTMon.pTMDData == NULL)
    SendResponse(pECB, szTMinInitError, pTPCC->szHeader);
TPCCClear(pTPCC);
pTPCC->ConnID = pECB->ConnID;
pTPCC->RecvMsg = pECB->lpszQueryString;
uRslt = TPCCHandler(pTPCC);
switch (uRslt)
{
    case TPCCSEND:
        SendResponse(pECB, pTPCC->SendMsg, pTPCC->szHeader);
        dwRslt = HSE_STATUS_SUCCESS_AND_KEEP_CONN;
        break;
    case TPCCSENDEND:
        SendResponse(pECB, pTPCC->SendMsg, pTPCC->szHeader);
        break;
    case TPCCENDNOW:
        default:
            break;
}; // switch (TPCCHandler result)

Httpxit:

    return(dwRslt);

}; // HttpExtensionProc

//=====
//
// Function name: SendResponse
//
//=====
VOID SendResponse(EXTENSION_CONTROL_BLOCK * pECB, CHAR * pMsg, CHAR * pWork)
{
    DWORD dwMsgBytes;
    CHAR * pCL;
    dwMsgBytes = strlen(pMsg);
    pCL=strstr(pMsg, CTEXT);
    dwMsgBytes -= iHHdrLen;
    sprintf(pWork, "%4ld", dwMsgBytes);
    pCL += iCTextLen;
    strncpy(pCL, pWork, 4);
    (*pECB->ServerSupportFunction)
        (pECB->ConnID,
         HSE_REQ_SEND_RESPONSE_HEADER,
         NULL,
         &dwMsgBytes,
         (LPDWORD)pMsg);
}; // SendResponse

//=====
//
// Function name: ReadRegistry
//
// Sets global operational parameters from registry if they exist.
// Otherwise, compiled in defaults apply.
//
// Result:
// FALSE Registry entry found
// TRUE Registry entry does not exist
//

```

```

//=====
BOOL ReadRegistry(VOID)
{
    HKEY hkTPCC;
    DWORD dwMax;
    DWORD dwRT;
    INT i;
    CHAR szValue[100];
    if (RegOpenKeyEx(HKEY_LOCAL_MACHINE, "SOFTWARE\\Unisys\\TPCC", 0,
        KEY_READ, &hkTPCC) != ERROR_SUCCESS )
        return(TRUE);
    dwMax = sizeof(szValue);
    if (RegQueryValueEx(hkTPCC, "EVENTLOG", 0, &dwRT, szValue, &dwMax)
        == ERROR_SUCCESS)
    {
        if (abs(atoi(szValue) == 0))
            bEventLog = FALSE;
        else
            bEventLog = TRUE;
    };
    dwMax = sizeof(szValue);
    if (RegQueryValueEx(hkTPCC, "CONSOLE", 0, &dwRT, szValue, &dwMax)
        == ERROR_SUCCESS )
    {
        if (abs(atoi(szValue) == 0))
            bConsole = FALSE;
        else
            bConsole = TRUE;
    };
    dwMax = sizeof(szValue);
    if (RegQueryValueEx(hkTPCC, "DIAGLEVEL", 0, &dwRT, szValue, &dwMax)
        == ERROR_SUCCESS )
    {
        i = atoi(szValue);
        if (i < DIAG_FORCE)
            i = DIAG_FORCE;
        else
            if (i > DIAG_INFO)
                i = DIAG_INFO;
        uDiagLevel = i;
    };
    dwMax = sizeof(szValue);
    if (RegQueryValueEx(hkTPCC, "MAXTERMS", 0, &dwRT, szValue, &dwMax)
        == ERROR_SUCCESS )
    {
        iMaxTerms = abs(atoi(szValue));
    };
    RegCloseKey(hkTPCC);
    return(FALSE);
}; // ReadRegistry

tpcchandler.h

// tpcchandler.h
#include "tpcc.h"

BOOL TPCCClear(TPCC_STATE * pTPCC);

```

```
UINT TPCCHandler(TPCC_STATE * pTPCC);
```

## tpcchandler.c

```
// tpcchandler.c
//
// Copyright Unisys, 1997
//
#include <windows.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

#include "tmon.h"
#include "diagio.h"
#include "tpcchandler.h"
#include "term.h"

// pTPCC->iFormId - TPCC forms enumeration.
#define FORM_NULL 0
#define FORM_LOGON 1
#define FORM_MENU 2
#define FORM_NEWORDER 3
#define FORM_PAYMENT 4
#define FORM_DELIVERY 5
#define FORM_ORDERSTATUS 6
#define FORM_STOCKLEVEL 7
#define FORM_EXIT 8
#define FORM_MAX 9

// CMD= HTML Command Enumeration and Name
#define CMD_NULL 0
#define CMD_PROCESS 1
#define CMD_NEWORDER_FORM 2
#define CMD_PAYMENT_FORM 3
#define CMD_DELIVERY_FORM 4
#define CMD_ORDERSTATUS_FORM 5
#define CMD_STOCKLEVEL_FORM 6
#define CMD_EXIT 7
#define CMD_SUBMIT 8
#define CMD_MENU_FORM 9
#define CMD_MAX 10

static CHAR * szCmds[] =
{
    "Unknown",
    "Process",
    "..NewOrder..",
    "..Payment..",
    "..Delivery..",
    "..Order-Status..",
    "..Stock-Level..",
    "..Exit..",
    "Submit",
    "Menu"
};

static CHAR * szFormLogin =
    HTTPHdr "<HTML>"
```

```
<HEAD><TITLE>Welcome To TPC-C</TITLE></HEAD><BODY>
"Please Identify your Warehouse and District for this session.<BR>"
"<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
"<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">"
"<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"1\">"
"<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"-2\">"
"<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"0\">"
"Warehouse ID <INPUT NAME=\"w_id\" SIZE=4><BR>"
"District ID <INPUT NAME=\"d_id\" SIZE=2><BR>"
"<HR>"
"<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Submit\">"
"</FORM>";
```

```
static CHAR * szMenuList =
    "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Payment..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Delivery..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-Status..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
    "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">";
```

```
static CHAR * HTMLTrailer =
    "</BODY></HTML>";
```

```
static CHAR * TERMIDTOKEN = "TERMID=";
static CHAR * SYNCIDTOKEN = "SYNCID=";
static CHAR * FORMIDTOKEN = "FORMID=";
static CHAR * STATUSIDTOKEN = "STATUSID=";
static CHAR * CMDTOKEN = "CMD=";
static CHAR * NEWORDER_SERVICE = "NEWORDER";
static CHAR * PAYMENT_SERVICE = "PAYMENT";
static CHAR * ORDERSTATUS_SERVICE = "ORDERSTS";
static CHAR * DELIVERY_SERVICE = "DELIVERY";
static CHAR * STOCKLEVEL_SERVICE = "STOCKLVL";
static CHAR * ZIPPIC = "XXXXX-XXXX";
```

```
BOOL ProcessLogin(CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC);
BOOL ProcessForm(CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC);
BOOL ProcessNewOrder(CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC);
BOOL ProcessPayment(CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC);
BOOL ProcessDelivery(CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC);
BOOL ProcessOrderStatus(CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC);
BOOL ProcessStockLevel(CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC);
VOID FormatLogin(CHAR * pMsg, CHAR * pAddText);
BOOL GetHidden(CHAR * pMsg, UINT * uFormId, INT * iSyncId, INT * iTermId);
BOOL GetCmd(CHAR * pMsg, CHAR * pWork, UINT uLen);
BOOL GetLongKey(LONG * lRslt, CHAR * pHTML, CHAR * pKey, TPCC_STATE * pTPCC);
BOOL GetIntKey(INT * iRslt, CHAR * pHTML, CHAR * pKey, TPCC_STATE * pTPCC);
BOOL GetShortKey(SHORT * sRslt, CHAR * pHTML, CHAR * pKey, TPCC_STATE * pTPCC);
BOOL GetStringKey(CHAR * szRslt, CHAR * pHTML, CHAR * pKey,
    TPCC_STATE * pTPCC, UINT uMax);
BOOL GetAmountKey(DOUBLE * dRslt, CHAR * pHTML, CHAR * pKey,
    TPCC_STATE * pTPCC);
BOOL GetKeyValue(CHAR * pHTML, CHAR * pKey, CHAR * pValue, UINT uMax);
VOID FormatLogin(CHAR * pOut, CHAR * pAddText);
VOID FormatMenu(CHAR * pOut, TPCC_STATE * pTPCC);
VOID FormatNewOrder(CHAR * pOut, TPCC_STATE * pTPCC);
VOID FormatPayment(CHAR * pOut, TPCC_STATE * pTPCC);
VOID FormatDelivery(CHAR * pOut, TPCC_STATE * pTPCC);
```

```

VOID FormatOrderStatus (CHAR * pOut, TPCC_STATE * pTPCC);
VOID FormatStockLevel (CHAR * pOut, TPCC_STATE * pTPCC);
VOID FormatFormHdr (CHAR * pOut, CHAR * pTitle, TPCC_STATE * pTPCC);
VOID FormatRespHdr (CHAR * pOut, CHAR * pTitle, TPCC_STATE * pTPCC);
VOID FormatHTMLString (CHAR * pOut, CHAR * pIn, UINT uLen);
VOID FormatString (CHAR * pOut, CHAR * pPic, CHAR * pIn);
VOID UtilStrCpy (CHAR * pDest, CHAR * pSrc, INT n);
BOOL CheckNumeric (CHAR * pNum);

//=====
//
// Function name: TPCCclear
//
//=====
BOOL TPCCclear (TPCC_STATE * pTPCC)
{
    pTPCC->ConnID = 0;
    pTPCC->SWid = 0;
    pTPCC->SDid = 0;
    pTPCC->iSyncId = 0;
    pTPCC->iTermId = -2;
    pTPCC->uFormId = FORM_NULL;
    pTPCC->iStatusId = 0;
    pTPCC->tsTMon.lTMDDataLen = 0;
    strcpy (pTPCC->ErrMsg, "");
    return (FALSE);
}; // TPCCclear

//=====
//
// Function name: TPCCHandler
//
//=====
UINT TPCCHandler (TPCC_STATE * pTPCC)
{
    INT iSyncId;
    INT iTermId;
    UINT uCmdId;
    UINT uRslt = TPCCSEND; // default error handling
    TERM_STATE * pTerm;

    pTPCC->iStatusId = STATUS_OK;
    if (GetHidden (pTPCC->RecvMsg, &pTPCC->uFormId, &iSyncId, &iTermId))
    {
        uRslt = TPCCSEND;
        FormatLogin (pTPCC->SendMsg, pTPCC->ErrMsg);
        goto HdlrXit;
    };
    if (iTermId > 0)
    {
        pTerm = TermGet (iTermId);
        if (pTerm == NULL)
        {
            uRslt = TPCCSEND;
            strcpy (pTPCC->ErrMsg, "Invalid Term Id");
            FormatLogin (pTPCC->SendMsg, pTPCC->ErrMsg);
            goto HdlrXit;
        };
        if (pTerm->ConnID != pTPCC->ConnID)
        {

```

```

            uRslt = TPCCSEND;
            strcpy (pTPCC->ErrMsg, "TermId vs ConnId Mismatch");
            FormatLogin (pTPCC->SendMsg, pTPCC->ErrMsg);
            goto HdlrXit;
        };
        pTPCC->SWid = pTerm->SWid;
        pTPCC->SDid = pTerm->SDid;
        pTPCC->iSyncId = pTerm->iSyncId;
        pTPCC->iTermId = pTerm->iTermId;
    };
    uCmdId = GetCmd (pTPCC->RecvMsg, pTPCC->szWork, sizeof (pTPCC->szWork));
    // Except for Submit (log in), SWid must already be set
    if (pTPCC->SWid == 0 && uCmdId != CMD_SUBMIT)
    {
        strcpy (pTPCC->ErrMsg, "Must log in first!");
        FormatLogin (pTPCC->SendMsg, pTPCC->ErrMsg);
        uRslt = TPCCSEND;
        goto HdlrXit;
    };
    // Check for multiple log in attempts
    if (pTPCC->SWid != 0 && uCmdId == CMD_SUBMIT)
    {
        strcpy (pTPCC->ErrMsg, ERRTXT_ALREADY_LOGGEDIN);
        pTPCC->iStatusId = ERR_ALREADY_LOGGEDIN;
        FormatMenu (pTPCC->SendMsg, pTPCC);
        uRslt = TPCCSEND;
        goto HdlrXit;
    };
    // If not logging in, validate hidden fields
    if (uCmdId != CMD_SUBMIT)
    {
        if (iTermId != pTPCC->iTermId || iTermId != iSyncId)
        {
            sprintf (pTPCC->ErrMsg, "%s: Received %ld, %ld (%ld)",
                ERRTXT_TERMID, iTermId, iSyncId, pTPCC->iTermId);
            pTPCC->iStatusId = ERR_TERMID;
            FormatMenu (pTPCC->SendMsg, pTPCC);
            goto HdlrXit;
        };
    };
    // Process the command
    switch (uCmdId)
    {
        case CMD_SUBMIT:
            ProcessLogin (pTPCC->RecvMsg, pTPCC->SendMsg, pTPCC);
            break;
        case CMD_MENU_FORM:
            FormatMenu (pTPCC->SendMsg, pTPCC);
            break;
        case CMD_PROCESS:
            ProcessForm (pTPCC->RecvMsg, pTPCC->SendMsg, pTPCC);
            break;
        case CMD_NEWORDER_FORM:
            FormatNewOrder (pTPCC->SendMsg, pTPCC);
            break;
        case CMD_PAYMENT_FORM:
            FormatPayment (pTPCC->SendMsg, pTPCC);
            break;
        case CMD_DELIVERY_FORM:
            FormatDelivery (pTPCC->SendMsg, pTPCC);

```

```

        break;
    case CMD_ORDERSTATUS_FORM:
        FormatOrderStatus(pTPCC->SendMsg,pTPCC);
        break;
    case CMD_STOCKLEVEL_FORM:
        FormatStockLevel(pTPCC->SendMsg,pTPCC);
        break;
    case CMD_EXIT:
        TermFree(pTPCC->iTermId);
        strcpy(pTPCC->ErrTxt,"Logged Off");
        FormatLogin(pTPCC->SendMsg,pTPCC->ErrTxt);
        goto HdlrXit;
    default:
        strcpy(pTPCC->ErrTxt,ERRTXT_CMD_UNKNOWN);
        pTPCC->iStatusId = ERR_CMD_UNKNOWN;
        if (pTPCC->sWid == 0)
            FormatLogin(pTPCC->SendMsg,pTPCC->ErrTxt);
        else
            FormatMenu(pTPCC->SendMsg,pTPCC);
        break;
}; // switch (uCmdId)

uRslt = TPCCSEND;

HdlrXit:

    return(uRslt);

}; // TPCCHandler

//=====
//
// Function name: ProcessLogin
//
// ProcessLogin extracts WId and DId from the incoming form. Assumes
// log in has not previously completed (sWid == 0 already verified).
//
// Result:
// FALSE - log in successful, sWid and sDId set in pTPCC,
// pOut contains menu.
// TRUE - log in failed, pOut contains log in form with
// error message.
//
//=====
BOOL ProcessLogin(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    SHORT sWid;
    SHORT sDId;
    TERM_STATE * pTerm;

    if (GetShortKey(&sWid,pIn,"w_id",pTPCC))
    {
        FormatLogin(pOut,pTPCC->ErrTxt);
        return(TRUE);
    };
    if (sWid < 1)
    {
        sprintf(pTPCC->ErrTxt,"Warehouse Id (%d) Invalid",sWid);
        pTPCC->iStatusId = ERR_WID_INVALID;
        FormatLogin(pOut,pTPCC->ErrTxt);
    }
}

```

```

        return(TRUE);
    };
    if (GetShortKey(&sDId,pIn,"d_id",pTPCC))
    {
        FormatLogin(pOut,pTPCC->ErrTxt);
        return(TRUE);
    };
    if (sDId < MIN_DId || sDId > MAX_DId)
    {
        sprintf(pTPCC->ErrTxt,"DId Out of Range(%ld,%ld) - %ld",
            MIN_DId,MAX_DId,sDId);
        pTPCC->iStatusId = ERR_DID_INVALID;
        FormatLogin(pOut,pTPCC->ErrTxt);
        return(TRUE);
    };
    pTerm = TermAlloc();
    if (pTerm == NULL)
    {
        sprintf(pTPCC->ErrTxt,"Unable to Allocate Terminal Entry");
        pTPCC->iStatusId = ERR_TERM_ALLOC;
        FormatLogin(pOut,pTPCC->ErrTxt);
        return(TRUE);
    };
    pTerm->ConnID = pTPCC->ConnID;
    pTerm->iSyncId = pTerm->iTermId;
    pTerm->sWid = abs(sWid);
    pTerm->sDId = abs(sDId);
    pTPCC->iTermId = pTerm->iTermId;
    pTPCC->iSyncId = pTerm->iSyncId;
    pTPCC->sWid = pTerm->sWid;
    pTPCC->sDId = pTerm->sDId;
    FormatMenu(pOut,pTPCC);
    return(FALSE);
}; // ProcessLogin

//=====
//
// Function name: ProcessForm
//
// ProcessForm uses pTPCC->uFormId to determine which form input is
// present and ready for processing. Actual processing is done by
// the form specific routine.
//
// Result:
// FALSE - form processed, pOut contains response.
// TRUE - error processing form input, pOut contains reason.
//
//=====
BOOL ProcessForm(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    switch (pTPCC->uFormId)
    {
        case FORM_NEWORDER:
            return(ProcessNewOrder(pIn,pOut,pTPCC));
        case FORM_PAYMENT:
            return(ProcessPayment(pIn,pOut,pTPCC));
        case FORM_DELIVERY:
            return(ProcessDelivery(pIn,pOut,pTPCC));
        case FORM_ORDERSTATUS:
            return(ProcessOrderStatus(pIn,pOut,pTPCC));
    }
}

```

```

    case FORM_STOCKLEVEL:
        return(ProcessStockLevel(pIn,pOut,pTPCC));
    default:
        sprintf(pTPCC->ErrTxt,"%s (%ld)",
            ERRTXT_FORM_UNKNOWN,pTPCC->uFormId);
        pTPCC->iStatusId = ERR_FORM_UNKNOWN;
        FormatMenu(pOut,pTPCC);
        break;
    }
    return(TRUE);
}; // ProcessForm

//=====
//
// Function name: ProcessNewOrder
//
// ProcessNewOrder extracts the input data fields from pIn, processes
// the data, and returns a response in pOut.
//
// Result:
// FALSE - NewOrder processed successfully.
// TRUE - NewOrder processing failed.
//=====
BOOL ProcessNewOrder(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    NEW_ORDER_DATA * pnod;
    TMON_STATE * pTMon;
    CHAR szKey[20];
    CHAR szCredit[14];
    UINT u;
    BOOL bDone = FALSE;
    BOOL bTMRslt;
    BOOL bTPRslt;
    INT iTPRslt;

    pTMon = &pTPCC->tsTMon;
    pTMon->lTMDDataLen = sizeof(NEW_ORDER_DATA);
    memset(pTMon->pTMDData,0,pTMon->lTMDDataLen);
    pnod = (NEW_ORDER_DATA *) pTMon->pTMDData;
    pnod->w_id = pTPCC->sWId;
    if (GetShortKey(&pnod->d_id,pIn,"DID*",pTPCC))
    {
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (pnod->d_id < MIN_DId || pnod->d_id > MAX_DId)
    {
        sprintf(pTPCC->ErrTxt,"DId Out of Range(%ld,%ld) - %ld",
            MIN_DId,MAX_DId,pnod->d_id);
        pTPCC->iStatusId = ERR_DID_INVALID;
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (GetLongKey(&pnod->c_id,pIn,"CID*",pTPCC))
    {
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    pnod->o_ol_cnt = 0;

```

```

for(u=0; u < MAX_OL; u++)
{
    sprintf(szKey,"IID%2.2d*",u);
    if (GetLongKey(&pnod->ol[u].ol_i_id,pIn,szKey,pTPCC))
    {
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    sprintf(szKey,"SP%2.2d*",u);
    if (GetShortKey(&pnod->ol[u].ol_supply_w_id,pIn,szKey,pTPCC))
    {
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    sprintf(szKey,"Qty%2.2d*",u);
    if (GetShortKey(&pnod->ol[u].ol_quantity,pIn,szKey,pTPCC))
    {
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (pnod->ol[u].ol_i_id != 0)
    {
        // Check for prior blank lines
        if (bDone)
        {
            strcat(pTPCC->ErrTxt,"Embedded Empty Order Lines");
            pTPCC->iStatusId = ERR_EMBEDDED_EMPTY_OL;
            FormatMenu(pOut,pTPCC);
            return(TRUE);
        };
        if (pnod->ol[u].ol_supply_w_id < 1)
        {
            sprintf(pTPCC->ErrTxt,
                "Order Line %ld Contains Invalid WId %d",
                u,pnod->ol[u].ol_supply_w_id);
            pTPCC->iStatusId = ERR_WID_INVALID;
            FormatMenu(pOut,pTPCC);
            return(TRUE);
        };
        if (pnod->ol[u].ol_quantity < MIN_QUANTITY ||
            pnod->ol[u].ol_quantity > MAX_QUANTITY)
        {
            sprintf(pTPCC->ErrTxt,
                "Order Line %ld Contains Invalid Qty %d",
                u,pnod->ol[u].ol_quantity);
            pTPCC->iStatusId = ERR_QUANTITY_INVALID;
            FormatMenu(pOut,pTPCC);
            return(TRUE);
        };
        pnod->o_ol_cnt++;
    } // if (ol_i_id !=0)
    else
    {
        if (pnod->ol[u].ol_supply_w_id != 0)
        {
            sprintf(pTPCC->ErrTxt,
                "Order Line %ld WId Supplied with No Item",u);
            pTPCC->iStatusId = ERR_OL_INVALID;
            FormatMenu(pOut,pTPCC);
            return(TRUE);
        };
    };
}

```

```

};
if (pnod->Ol[u].ol_quantity != 0)
{
    sprintf(pTPCC->ErrTxt,
        "Order Line %ld Qty Supplied with No Item",u);
    pTPCC->iStatusId = ERR_OL_INVALID;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
bDone = TRUE;
}; // empty order line
}; // for (u < MAX_OL)

if (pnod->o_ol_cnt < MIN_OL)
{
    sprintf(pTPCC->ErrTxt,"Too Few Order Lines %d",pnod->o_ol_cnt);
    pTPCC->iStatusId = ERR_OL_COUNT;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
bTMRslt = TMTran(NEWORDER_SERVICE,pTMon,&bTPRslt,&iTPRslt);
pnod = (NEW_ORDER_DATA *) pTMon->pTMDData;
if (bTMRslt)
{
    pTPCC->iStatusId = ERR_TM_INTERFACE;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
// Exclude invalid item id case
if (bTPRslt && iTPRslt < SVC_NOERROR)
{
    sprintf(pTPCC->ErrTxt,
        "New Order Service Returned Error(%ld): %s",
        iTPRslt,pnod->execution_status);
    pTPCC->iStatusId = ERR_SERVICE_RSLT;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
if (iTPRslt == SVC_BADITEMID)
    pTPCC->iStatusId = INVALID_IID;

FormatRespHdr(pOut,"TPC-C New Order",pTPCC);
sprintf(pOut + strlen(pOut),
    "<PRE>                               New Order<BR>"
    "Warehouse: %4.4d  District: %2.2d          ",
    pnod->w_id,pnod->d_id);
if (!bTPRslt)
{
    sprintf(pOut + strlen(pOut),
        "Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:<BR>",
        pnod->o_entry_d.day,pnod->o_entry_d.month,
        pnod->o_entry_d.year,pnod->o_entry_d.hour,
        pnod->o_entry_d.minute,pnod->o_entry_d.second);
}
else
{
    sprintf(pOut + strlen(pOut),"Date:<BR>");
};
FormatHTMLString(pTPCC->szWork,pnod->c_last,NAME_LEN);
FormatHTMLString(szCredit,pnod->c_credit,2);

```

```

sprintf(pOut + strlen(pOut),
    "Customer: %4.4d  Name: %s  Credit: %s  ",
    pnod->c_id,pTPCC->szWork,szCredit);
if (!bTPRslt)
{
    sprintf(pOut + strlen(pOut),
        "%Disc: %5.2f          <BR>",pnod->c_discount * 100);
    sprintf(pOut + strlen(pOut),
        "Order Number: %8.8d  Number of Lines: %2.2d          W_tax: %5.2f
D_tax: %5.2f  <BR><BR>",
        pnod->o_id,pnod->o_ol_cnt,pnod->w_tax * 100,pnod->d_tax * 100);
    strcat(pOut," Supp_W  Item_Id  Item Name          Qty  Stock
B/G  Price  Amount<BR>");
    for (u = 0; u < (UINT) pnod->o_ol_cnt; u++)
    {
        FormatHTMLString(pTPCC->szWork,pnod->Ol[u].ol_i_name,24);
        sprintf(pOut + strlen(pOut),
            " %4.4d  %6.6d  %s %2.2d  %3.3d  %1.1s  $%6.2f
$%7.2f  <BR>",
            pnod->Ol[u].ol_supply_w_id,pnod->Ol[u].ol_i_id,
            pTPCC->szWork,pnod->Ol[u].ol_quantity,pnod->Ol[u].ol_stock,
            pnod->Ol[u].ol_brand_generic,pnod->Ol[u].ol_i_price,
            pnod->Ol[u].ol_amount );
    }
} // if (!bTPRslt)
else
{
    strcat(pOut,"%Disc:<BR>");
    sprintf(pOut + strlen(pOut),
        "Order Number: %8.8d  Number of Lines:          W_tax:
D_tax:<BR><BR>",
        pnod->o_id);
    strcat(pOut,
        " Supp_W  Item_Id  Item Name          Qty  Stock  B/G
Price  Amount<BR>");
    u = 0;
};
for(; u < MAX_OL; u++)
    strcat(pOut,"<BR>");
if (!bTPRslt)
{
    sprintf(pOut + strlen(pOut),
        "Execution Status: %24.24s          Total: $%8.2f  ",
        pnod->execution_status,pnod->total_amount);
}
else
{
    sprintf(pOut + strlen(pOut),
        "Execution Status: %24.24s          Total:",
        pnod->execution_status);
};
sprintf(pOut + strlen(pOut),
    "</PRE><HR><BR>%s</FORM>%s",szMenuList,HTMLTrailer);

return(FALSE);
}; // ProcessNewOrder

//=====
//

```

```

// Function name: ProcessPayment
//
// ProcessPayment extracts the input data fields from pIn, processes
// the data, and returns a response in pOut.
//
// Result:
// FALSE - Payment processed successfully.
// TRUE - Payment processing failed.
//=====
BOOL ProcessPayment (CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC)
{
    PAYMENT_DATA * ppd;
    TMON_STATE * pTMon;
    BOOL bTMRslt;
    BOOL bTPRslt;
    INT iTPRslt;
    CHAR * pCredit;
    INT iCDLines;
    CHAR szWork2[60];
    CHAR szWork3[60];
    CHAR szWork4[60];
    CHAR szZip1[20];
    CHAR szZip2[20];
    INT i;

    pTMon = &pTPCC->stTMon;
    pTMon->lTMDDataLen = sizeof(PAYMENT_DATA);
    memset (pTMon->pTMDData, 0, pTMon->lTMDDataLen);
    ppd = (PAYMENT_DATA *) pTMon->pTMDData;
    ppd->w_id = pTPCC->sWid;
    // Get and validate DID
    if (GetShortKey (&ppd->d_id, pIn, "DID*", pTPCC))
    {
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    if (ppd->d_id < MIN_DID || ppd->d_id > MAX_DID)
    {
        sprintf (pTPCC->ErrTxt, "DID Out of Range(%ld,%ld) - %ld",
            MIN_DID, MAX_DID, ppd->d_id);
        pTPCC->iStatusId = ERR_DID_INVALID;
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    // Get and validate customer Id and name
    if (GetLongKey (&ppd->c_id, pIn, "CID*", pTPCC))
    {
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    if (GetStringKey (ppd->c_last, pIn, "CLT*", pTPCC, NAME_LEN))
    {
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    if (ppd->c_id == 0 && ppd->c_last[0] == 0)
    {
        strcpy (pTPCC->ErrTxt, "Error - Customer Id and Name Empty");
        pTPCC->iStatusId = ERR_IDANDNAME_EMPTY;

```

```

        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    if (ppd->c_id != 0 && ppd->c_last[0] != 0)
    {
        strcpy (pTPCC->ErrTxt,
            "Error - Specify Customer Id or Name, not Both");
        pTPCC->iStatusId = ERR_IDANDNAME_ENTERED;
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    // Get and validate customer DId
    if (GetShortKey (&ppd->c_d_id, pIn, "CDI*", pTPCC))
    {
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    if (ppd->c_d_id < MIN_DID || ppd->c_d_id > MAX_DID)
    {
        sprintf (pTPCC->ErrTxt, "Cust DId Out of Range(%ld,%ld) - %ld",
            MIN_DID, MAX_DID, ppd->d_id);
        pTPCC->iStatusId = ERR_DID_INVALID;
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    // Get and validate customer WId
    if (GetShortKey (&ppd->c_w_id, pIn, "CWI*", pTPCC))
    {
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    if (ppd->c_w_id < 1)
    {
        sprintf (pTPCC->ErrTxt,
            "Payment Contains Invalid Customer WId %d",
            ppd->c_w_id);
        pTPCC->iStatusId = ERR_WID_INVALID;
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    // Get and validate amount
    if (GetAmountKey (&ppd->h_amount, pIn, "HAM*", pTPCC))
    {
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    if (ppd->h_amount <= 0)
    {
        sprintf (pTPCC->ErrTxt,
            "Payment Amount Negative or Missing");
        pTPCC->iStatusId = ERR_AMOUNT_INVALID;
        FormatMenu (pOut, pTPCC);
        return (TRUE);
    };
    bTMRslt = TMTran (PAYMENT_SERVICE, pTMon, &bTPRslt, &iTPRslt);
    ppd = (PAYMENT_DATA *) pTMon->pTMDData;
    if (bTMRslt)
    {
        pTPCC->iStatusId = ERR_TM_INTERFACE;
        FormatMenu (pOut, pTPCC);

```



```

return(TRUE);
};
if (bTPRslt)
{
    sprintf(pTPCC->ErrTxt,
        "Payment Service Returned Error(%ld): %s",
            iTPRslt,ppd->execution_status);
    pTPCC->iStatusId = ERR_SERVICE_RSLT;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
FormatRespHdr(pOut,"TPC-C Payment",pTPCC);
sprintf(pOut + strlen(pOut),
    "<PRE>
    Payment<BR>"
    "Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d <BR><BR>"
    "Warehouse: %4.4d"
    "
    District: %2.2d<BR>",
        ppd->h_date.day,ppd->h_date.month,
        ppd->h_date.year,ppd->h_date.hour,
        ppd->h_date.minute,ppd->h_date.second,
        ppd->w_id,ppd->d_id);

FormatHTMLString(szWork2,ppd->w_street_1,ADDR_LEN);
FormatHTMLString(szWork3,ppd->d_street_1,ADDR_LEN);
sprintf(pOut + strlen(pOut),
    "%s
    %s<BR>",szWork2,szWork3);
FormatHTMLString(szWork2,ppd->w_street_2,ADDR_LEN);
FormatHTMLString(szWork3,ppd->d_street_2,ADDR_LEN);
sprintf(pOut + strlen(pOut),
    "%s
    %s<BR>",szWork2,szWork3);
FormatHTMLString(pTPCC->szWork,ppd->w_city,ADDR_LEN);
FormatHTMLString(szWork2,ppd->d_city,ADDR_LEN);
FormatHTMLString(szWork3,ppd->w_state,STATE_LEN);
FormatHTMLString(szWork4,ppd->d_state,STATE_LEN);
FormatString(szZip1,ZIPPIC,ppd->w_zip);
FormatString(szZip2,ZIPPIC,ppd->d_zip);
sprintf(pOut + strlen(pOut),
    "%s %s %10.10s
    %s %s %10.10s<BR><BR>",
        pTPCC->szWork,szWork3,szZip1,szWork2,szWork4,szZip2);
FormatHTMLString(szWork2,ppd->c_first,NAME_LEN);
FormatHTMLString(szWork3,ppd->c_middle,2);
FormatHTMLString(szWork4,ppd->c_last,NAME_LEN);
sprintf(pOut + strlen(pOut),
    "Customer: %4.4d Cust-Warehouse: %4.4d Cust-District: %2.2d<BR>"
    "Name: %s %s %s Since: %2.2d-%2.2d-%4.4d<BR>",
        ppd->c_id,ppd->c_w_id,ppd->c_d_id,
        szWork2,szWork3,szWork4,
        ppd->c_since.day,ppd->c_since.month,ppd->c_since.year);
FormatHTMLString(pTPCC->szWork,ppd->c_street_1,ADDR_LEN);
FormatHTMLString(szWork2,ppd->c_credit,2);
FormatHTMLString(szWork3,ppd->d_street_2,ADDR_LEN);
sprintf(pOut + strlen(pOut),
    "
    %s
    Credit: %s<BR>"
    "
    %s
    %%Disc: %5.2f<BR>",
        pTPCC->szWork,szWork2,szWork3,ppd->c_discount * 100);
FormatHTMLString(szWork2,ppd->c_city,ADDR_LEN);
FormatHTMLString(szWork3,ppd->c_state,STATE_LEN);
FormatString(szZip1,ZIPPIC,ppd->c_zip);
FormatString(szWork4,"XXXXXX-XXX-XXX-XXXX",ppd->c_phone);
sprintf(pOut + strlen(pOut),

```

```

"
    %s %s %10.10s
    Phone: %-19.19s<BR><BR>"
    "Amount Paid:
    $%7.2f
    New Cust Balance: $%14.2f<BR><BR>"
    "Credit Limit:
    $%13.2f<BR><BR>",
    szWork2,szWork3,szZip1,szWork4,
    ppd->h_amount,ppd->c_balance,ppd->c_credit_lim);
pCredit = ppd->c_credit;
if (*pCredit == 'B' && *(pCredit + 1) == 'C')
{
    pCredit = ppd->c_data;
    iCDLines = strlen(pCredit) / 50;
    for(i = 0; i < 4; i++, pCredit += 50)
    {
        if (i <= iCDLines)
            UtilStrCpy(szWork2,pCredit,50);
        else
            szWork2[0] = 0;
        FormatHTMLString(szWork3,szWork2,50);
        if (!i)
            sprintf(pOut + strlen(pOut),
                "Cust-Data: %s<BR>",szWork3);
        else
            sprintf(pOut + strlen(pOut),
                "
                %s<BR>",szWork3);
    };
}
else
    strcat(pOut,"Cust-Data: <BR><BR><BR><BR>");
sprintf(pOut + strlen(pOut),
    "</PRE><HR><BR>%s</FORM>%s",szMenuList,HTMLTrailer);

return(FALSE);
}; // ProcessPayment

//=====
//
// Function name: ProcessDelivery
//
// ProcessDelivery extracts the input data fields from pIn, processes
// the data, and returns a response in pOut.
//
// Result:
// FALSE - Delivery processed successfully.
// TRUE - Delivery processing failed.
//=====
BOOL ProcessDelivery(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    DELIVERY_DATA * pdd;
    TMON_STATE * pTMon;
    BOOL bTMRslt;

    pTMon = &pTPCC->tsTMon;
    pTMon->lTMDDataLen = sizeof(DELIVERY_DATA);
    memset(pTMon->pTMDData,0,pTMon->lTMDDataLen);
    pdd = (DELIVERY_DATA *) pTMon->pTMDData;
    pdd->w_id = pTPCC->swId;
    // Get and validate carrier id
    if (GetShortKey(&pdd->o_carrier_id,pIn,"OCD*",pTPCC)
    {

```

```

FormatMenu(pOut,pTPCC);
return(TRUE);
};
if (pdd->o_carrier_id < MIN_CARRIER ||
    pdd->o_carrier_id > MAX_CARRIER)
{
    sprintf(pTPCC->ErrTxt,"Carrier Id Out of Range(%ld,%ld) - %ld",
        MIN_CARRIER,MAX_CARRIER,pdd->o_carrier_id);
    pTPCC->iStatusId = ERR_CARRIER_INVALID;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
GetLocalTime(&pdd->QTime);
bTMRslt = TMPost(DELIVERY_SERVICE,pTMon);
if (bTMRslt)
{
    pTPCC->iStatusId = ERR_TM_INTERFACE;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
strcpy(pdd->execution_status,"Delivery has been queued.");
FormatRespHdr(pOut,"TPC-C Delivery",pTPCC);
sprintf(pOut + strlen(pOut),
    "<PRE>                                     Delivery<BR>"
    "Warehouse: %4.4d<BR><BR>"
    "Carrier Number: %2.2d<BR><BR>"
    "Execution Status: %25.25s<BR>",
    pdd->w_id,pdd->o_carrier_id,pdd->execution_status);
sprintf(pOut + strlen(pOut),
    "</PRE><HR><BR>%s</FORM>%s",szMenuList,HTMLTrailer);

return(FALSE);
}; // ProcessDelivery

//=====
//
// Function name: ProcessOrderStatus
//
// ProcessOrderStatus extracts the input data fields from pIn,
// processes the data, and returns a response in pOut.
//
// Result:
// FALSE - OrderStatus processed successfully.
// TRUE - OrderStatus processing failed.
//
//=====
BOOL ProcessOrderStatus(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    ORDER_STATUS_DATA * posd;
    TMON_STATE * pTMon;
    INT i;
    CHAR szWork2[50];
    CHAR szWork3[50];
    BOOL bTMRslt;
    BOOL bTPRslt;
    INT iTPRslt;

    pTMon = &pTPCC->tsTMon;
    pTMon->lTMDDataLen = sizeof(ORDER_STATUS_DATA);

```

```

memset(pTMon->pTMDData,0,pTMon->lTMDDataLen);
posd = (ORDER_STATUS_DATA *) pTMon->pTMDData;
posd->w_id = pTPCC->swId;
if (GetShortKey(&posd->d_id,pIn,"DID*",pTPCC)
{
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
if (posd->d_id < MIN_DID || posd->d_id > MAX_DID)
{
    sprintf(pTPCC->ErrTxt,"DId Out of Range(%ld,%ld) - %ld",
        MIN_DID,MAX_DID,posd->d_id);
    pTPCC->iStatusId = ERR_DID_INVALID;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
if (GetLongKey(&posd->c_id,pIn,"CID*",pTPCC)
{
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
if (GetStringKey(posd->c_last,pIn,"CLT*",pTPCC,NAME_LEN)
{
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
if (posd->c_id == 0 && posd->c_last[0] == 0)
{
    strcpy(pTPCC->ErrTxt,"Error - Customer Id and Name Empty");
    pTPCC->iStatusId = ERR_IDANDNAME_EMPTY;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
if (posd->c_id != 0 && posd->c_last[0] != 0)
{
    strcpy(pTPCC->ErrTxt,
        "Error - Specify Customer Id or Name, not Both");
    pTPCC->iStatusId = ERR_IDANDNAME_ENTERED;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
bTMRslt = TMTran(ORDERSTATUS_SERVICE,pTMon,&bTPRslt,&iTPRslt);
posd = (ORDER_STATUS_DATA *) pTMon->pTMDData;
if (bTMRslt)
{
    pTPCC->iStatusId = ERR_TM_INTERFACE;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
if (bTPRslt)
{
    sprintf(pTPCC->ErrTxt,
        "Order Status Service Returned Error(%ld): %s",
        iTPRslt,posd->execution_status);
    pTPCC->iStatusId = ERR_SERVICE_RSLT;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};
FormatRespHdr(pOut,"TPC-C Order-Status",pTPCC);
sprintf(pOut + strlen(pOut),

```

```

    "<PRE>
    Warehouse: %4.4d District: %2.2d<BR>",
    posd->w_id, posd->d_id);
FormatHTMLString(pTPCC->szWork, posd->c_first, NAME_LEN);
FormatHTMLString(szWork2, posd->c_middle, 2);
FormatHTMLString(szWork3, posd->c_last, NAME_LEN);
sprintf(pOut + strlen(pOut),
    "Customer: %4.4d Name: %s %s %s<BR>"
    "Cust-Balance: $%9.2f<BR><BR>",
    posd->c_id, pTPCC->szWork, szWork2, szWork3, posd->c_balance);
sprintf(pOut + strlen(pOut),
    "Order-Number: %8.8d Entry-Date: %2.2d-%2.2d-%4.4d
%2.2d:%2.2d:%2.2d Carrier-Number: %2.2d<BR>"
    "Supply-W Item-Id Qty Amount Delivery-Date<BR>",
    posd->o_id, posd->o_entry_d.day, posd->o_entry_d.month,
    posd->o_entry_d.year, posd->o_entry_d.hour,
    posd->o_entry_d.minute, posd->o_entry_d.second,
    posd->o_carrier_id);
for(i = 0; i < posd->o_ol_cnt; i++)
{
    sprintf(pOut + strlen(pOut),
        "%4.4d %6.6d %2.2d $%8.2f %2.2d-%2.2d-
%4.4d<BR>",
        posd->OlOrderStatusData[i].ol_supply_w_id,
        posd->OlOrderStatusData[i].ol_i_id,
        posd->OlOrderStatusData[i].ol_quantity,
        posd->OlOrderStatusData[i].ol_amount,
        posd->OlOrderStatusData[i].ol_delivery_d.day,
        posd->OlOrderStatusData[i].ol_delivery_d.month,
        posd->OlOrderStatusData[i].ol_delivery_d.year);
};
sprintf(pOut + strlen(pOut),
    "<BR></PRE><HR><BR>%s</FORM>%s", szMenuList, HTMLTrailer);

return (FALSE);
}; // ProcessOrderStatus

//=====
//
// Function name: ProcessStockLevel
//
// ProcessStockLevel extracts the input data fields from pIn,
// processes the data, and returns a response in pOut.
//
// Result:
// FALSE - StockLevel processed successfully.
// TRUE - StockLevel processing failed.
//
//=====
BOOL ProcessStockLevel (CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC)
{
    STOCK_LEVEL_DATA * psld;
    TMON_STATE * pTMon;
    BOOL bTMRslt;
    BOOL bTPRslt;
    INT iTPRslt;

    pTMon = &pTPCC->tsTMon;
    pTMon->lTMDDataLen = sizeof(STOCK_LEVEL_DATA);

```

```

    memset(pTMon->pTMDData, 0, pTMon->lTMDDataLen);
    psld = (STOCK_LEVEL_DATA *) pTMon->pTMDData;
    psld->w_id = pTPCC->sWId;
    psld->d_id = pTPCC->sDId;
    psld->low_stock = 0;
    psld->execution_status[0] = 0;
    if (GetShortKey(&psld->thresh_hold, pIn, "TT*", pTPCC))
    {
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    };
    if (psld->thresh_hold < MIN_THRESHOLD ||
        psld->thresh_hold > MAX_THRESHOLD)
    {
        sprintf(pTPCC->ErrTxt, "Threshold Out of Range(%ld,%ld) - %ld",
            MIN_THRESHOLD, MAX_THRESHOLD, psld->thresh_hold);
        pTPCC->iStatusId = ERR_THRESHOLD_RANGE;
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    };

    bTMRslt = TMTran(STOCKLEVEL_SERVICE, pTMon, &bTPRslt, &iTPRslt);
    psld = (STOCK_LEVEL_DATA *) pTMon->pTMDData;
    if (bTMRslt)
    {
        pTPCC->iStatusId = ERR_TM_INTERFACE;
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    };
    if (bTPRslt)
    {
        sprintf(pTPCC->ErrTxt,
            "Stock Level Service Returned Error(%ld): %s",
            iTPRslt, psld->execution_status);
        pTPCC->iStatusId = ERR_SERVICE_RSLT;
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    };

    FormatRespHdr(pOut, "TPC-C Stock Level", pTPCC);
    sprintf(pOut + strlen(pOut),
        "<PRE>
        Stock-Level<BR>"
        "Warehouse: %4.4d District: %2.2d<BR><BR>"
        "Stock Level Threshold: %2.2d<BR><BR>"
        "low stock: %3.3ld</PRE><BR><HR>"
        "%s</FORM>%s",
        pTPCC->sWId, pTPCC->sDId, psld->thresh_hold, psld->low_stock,
        szMenuList, HTMLTrailer);

    return (FALSE);
}; // ProcessStockLevel

//=====
//
// Function name: GetHidden
//
//=====
BOOL GetHidden(CHAR * pMsg, UINT * uFormId, INT * iSyncId, INT * iTermId)
{

```

```

CHAR * pPtr;
BOOL bRslt = TRUE;

// Extract TERMID
pPtr = strstr(pMsg, TERMIDTOKEN);
if (pPtr == NULL)
    goto xit;
pPtr += strlen(TERMIDTOKEN);
*iTermId = atoi(pPtr);

// Extract SYNCID
pPtr = strstr(pMsg, SYNCIDTOKEN);
if (pPtr == NULL)
    goto xit;
pPtr += strlen(SYNCIDTOKEN);
*iSyncId = atoi(pPtr);

// Extract FORMID
pPtr = strstr(pMsg, FORMIDTOKEN);
if (pPtr == NULL)
    goto xit;
pPtr += strlen(FORMIDTOKEN);
*uFormId = abs(atoi(pPtr));

bRslt = FALSE;

xit:

    return(bRslt);
}; // GetHidden

//=====
//
// Function name: GetCmd
//
//=====
BOOL GetCmd(CHAR * pMsg, CHAR * pWork, UINT uLen)
{
    UINT u;
    CHAR * ptr;
    CHAR * pUpd;

    // Check for CMD key
    if (!(ptr = strstr(pMsg, CMDTOKEN)))
        return(CMD_NULL);
    ptr += sizeof(CMDTOKEN);
    pUpd = pWork;
    while (*ptr && *ptr != '&')
        *pUpd++ = *ptr++;
    *pUpd = 0;

    // Convert command name into command index
    for(u=0; u < CMD_MAX; u++)
    {
        if (!strcmp(szCmds[u], pWork))
            return(u);
    };

    // Command string not found

```

```

return(CMD_NULL);
}; // GetCmd

//=====
//
// Function name: GetLongKey
//
//=====
BOOL GetLongKey(LONG * lRslt, CHAR * pHTML, CHAR * pKey, TPCC_STATE * pTPCC)
{
    if (GetKeyValue(pHTML, pKey, pTPCC->szWork, sizeof(pTPCC->szWork)))
    {
        sprintf(pTPCC->ErrTxt, "Error - Missing %s Key", pKey);
        pTPCC->iStatusId = ERR_MISSING_KEY;
        return(TRUE);
    };
    if (pTPCC->szWork[0] != 0 )
    {
        if (CheckNumeric(pTPCC->szWork))
        {
            sprintf(pTPCC->ErrTxt, "Error - %s Value Not Numeric", pKey);
            pTPCC->iStatusId = ERR_NOT_NUMERIC;
            return(TRUE);
        };
    };
    *lRslt = atol(pTPCC->szWork);
    return(FALSE);
}; // GetLongKey

//=====
//
// Function name: GetIntKey
//
//=====
BOOL GetIntKey(INT * iRslt, CHAR * pHTML, CHAR * pKey, TPCC_STATE * pTPCC)
{
    if (GetKeyValue(pHTML, pKey, pTPCC->szWork, sizeof(pTPCC->szWork)))
    {
        sprintf(pTPCC->ErrTxt, "Error - Missing %s Key", pKey);
        pTPCC->iStatusId = ERR_MISSING_KEY;
        return(TRUE);
    };
    if (pTPCC->szWork[0] != 0 )
    {
        if (CheckNumeric(pTPCC->szWork))
        {
            sprintf(pTPCC->ErrTxt, "Error - %s Value Not Numeric", pKey);
            pTPCC->iStatusId = ERR_NOT_NUMERIC;
            return(TRUE);
        };
    };
    *iRslt = atoi(pTPCC->szWork);
    return(FALSE);
}; // GetIntKey

//=====
//
// Function name: GetShortKey
//

```

```

//=====
BOOL GetShortKey(SHORT * sRslt, CHAR * pHTML, CHAR * pKey, TPCC_STATE *
pTPCC)
{
    if (GetKeyValue(pHTML, pKey, pTPCC->szWork, sizeof(pTPCC->szWork)))
    {
        sprintf(pTPCC->ErrTxt, "Error - Missing %s Key", pKey);
        pTPCC->iStatusId = ERR_MISSING_KEY;
        return(TRUE);
    };
    if (pTPCC->szWork[0] != 0 )
    {
        if (CheckNumeric(pTPCC->szWork))
        {
            sprintf(pTPCC->ErrTxt, "Error - %s Value Not Numeric", pKey);
            pTPCC->iStatusId = ERR_NOT_NUMERIC;
            return(TRUE);
        };
    };
    *sRslt = (SHORT) atoi(pTPCC->szWork);
    return(FALSE);
}; // GetShortKey

//=====
//
// Function name: GetStringKey
//
//=====
BOOL GetStringKey(CHAR * szRslt, CHAR * pHTML, CHAR * pKey,
TPCC_STATE * pTPCC, UINT uMax)
{
    UINT uLen;
    if (GetKeyValue(pHTML, pKey, pTPCC->szWork, sizeof(pTPCC->szWork)))
    {
        sprintf(pTPCC->ErrTxt, "Error - Missing %s Key", pKey);
        pTPCC->iStatusId = ERR_MISSING_KEY;
        return(TRUE);
    };
    uLen = strlen(pTPCC->szWork);
    if (uLen > uMax)
    {
        sprintf(pTPCC->ErrTxt,
            "Error - %s Key Input (%ld) Too Long (%ld)"
            , pKey, uLen, uMax);
        pTPCC->iStatusId = ERR_INPUT_TOOLONG;
        return(TRUE);
    };
    _strupr(pTPCC->szWork);
    strcpy(szRslt, pTPCC->szWork);
    return(FALSE);
}; // GetStringKey

//=====
//
// Function name: GetAmountKey
//
//=====
BOOL GetAmountKey(DOUBLE * dRslt, CHAR * pHTML, CHAR * pKey,
TPCC_STATE * pTPCC)
{

```

```

CHAR * ptr;
BOOL bInvalid = FALSE;

if (GetKeyValue(pHTML, pKey, pTPCC->szWork, sizeof(pTPCC->szWork)))
{
    sprintf(pTPCC->ErrTxt, "Error - Missing %s Key", pKey);
    pTPCC->iStatusId = ERR_MISSING_KEY;
    return(TRUE);
};
ptr = pTPCC->szWork;
while(*ptr)
{
    if (*ptr == '.')
    {
        ptr++;
        if (!*ptr)
            break;
        if (*ptr < '0' || *ptr > '9')
        {
            bInvalid = TRUE;
            break;
        };
        ptr++;
        if (!*ptr)
            break;
        if (*ptr < '0' || *ptr > '9')
        {
            bInvalid = TRUE;
            break;
        };
        ptr++;
        if (*ptr)
        {
            bInvalid = TRUE;
            break;
        };
        break;
    }
    else
    if (*ptr < '0' || *ptr > '9')
    {
        bInvalid = TRUE;
        break;
    };
    ptr++;
}; // while(!*ptr)

if (!bInvalid)
*dRslt = atof(pTPCC->szWork);
else
{
    sprintf(pTPCC->ErrTxt,
        "Error - Invalid Amount Format (%s)", pTPCC->szWork);
    pTPCC->iStatusId = ERR_AMOUNT_BADFORM;
};

return(bInvalid);
}; // GetAmountKey

```

```

//=====
//
// Function name: GetKeyValue
// This function parses an HTTP formatted string for specific key
// values. HTTP keys terminate with '='. HTTP values terminate
// with an '&' or '\0'.
//
// Result:
// FALSE - Key found, string value return in pValue
// TRUE - Key not found
//
//=====
BOOL GetKeyValue(CHAR * pHTML,CHAR * pKey,CHAR * pValue,UINT uMax)
{
    CHAR * ptr;
    if (!(ptr=strstr(pHTML,pKey)))
        return(TRUE);
    if (!(ptr=strchr(ptr,'=')))
        return(TRUE);
    ptr++;
    uMax--;
    while (*ptr && *ptr != '&' && uMax)
    {
        *pValue++ = *ptr++;
        uMax--;
    };
    *pValue = 0;
    return(FALSE);
}; // GetKeyValue

//=====
//
// Function name: FormatLogin
//
//=====
VOID FormatLogin(CHAR * pOut,CHAR * pAddText)
{
    sprintf(pOut,"%s<BR>%s<BR>%s",szFormLogin,pAddText,HTMLTrailer);
}; // FormatLogin

//=====
//
// Function name: FormatMenu
//
//=====
VOID FormatMenu(CHAR * pOut,TPCC_STATE * pTPCC)
{
    sprintf(pOut,
        "%s<HTML><HEAD><TITLE>TPC-C MainMenu</TITLE></HEAD><BODY>"
        "Select Desired Transaction.<BR><HR>"
        "<FORM ACTION=\"tpcc.dll\"METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
        "%s</FORM><BR>%s<BR>%s",
        HTTPHdr,pTPCC->iStatusId,pTPCC->iTermId,pTPCC->iSyncId,FORM_MENU,
        szMenuList,pTPCC->ErrTxt,HTMLTrailer);
}; // FormatMenu

```

```

//=====
//
// Function name: FormatNewOrder
//
//=====
VOID FormatNewOrder(CHAR * pOut,TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_NEWORDER;
    FormatFormHdr(pOut,"TPC-C New Order",pTPCC);
    sprintf(pOut + strlen(pOut),
        "<PRE>
        Warehouse: %4.4d District: <INPUT NAME=\"DID*\" SIZE=1>
Date:<BR>"
        "Customer: <INPUT NAME=\"CID*\" SIZE=4> Name:
Credit: %Disc:<BR>"
        "Order Number: Number of Lines: W_tax:
D_tax:<BR><BR>"
        " Supp_W Item_Id Item Name Qty Stock B/G Price
Amount<BR>"
        " <INPUT NAME=\"SP00*\" SIZE=4> <INPUT NAME=\"IID00*\" SIZE=6>
<INPUT NAME=\"Qty00*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP01*\" SIZE=4> <INPUT NAME=\"IID01*\" SIZE=6>
<INPUT NAME=\"Qty01*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP02*\" SIZE=4> <INPUT NAME=\"IID02*\" SIZE=6>
<INPUT NAME=\"Qty02*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP03*\" SIZE=4> <INPUT NAME=\"IID03*\" SIZE=6>
<INPUT NAME=\"Qty03*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP04*\" SIZE=4> <INPUT NAME=\"IID04*\" SIZE=6>
<INPUT NAME=\"Qty04*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP05*\" SIZE=4> <INPUT NAME=\"IID05*\" SIZE=6>
<INPUT NAME=\"Qty05*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP06*\" SIZE=4> <INPUT NAME=\"IID06*\" SIZE=6>
<INPUT NAME=\"Qty06*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP07*\" SIZE=4> <INPUT NAME=\"IID07*\" SIZE=6>
<INPUT NAME=\"Qty07*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP08*\" SIZE=4> <INPUT NAME=\"IID08*\" SIZE=6>
<INPUT NAME=\"Qty08*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP09*\" SIZE=4> <INPUT NAME=\"IID09*\" SIZE=6>
<INPUT NAME=\"Qty09*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP10*\" SIZE=4> <INPUT NAME=\"IID10*\" SIZE=6>
<INPUT NAME=\"Qty10*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP11*\" SIZE=4> <INPUT NAME=\"IID11*\" SIZE=6>
<INPUT NAME=\"Qty11*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP12*\" SIZE=4> <INPUT NAME=\"IID12*\" SIZE=6>
<INPUT NAME=\"Qty12*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP13*\" SIZE=4> <INPUT NAME=\"IID13*\" SIZE=6>
<INPUT NAME=\"Qty13*\" SIZE=1><BR>"
        " <INPUT NAME=\"SP14*\" SIZE=4> <INPUT NAME=\"IID14*\" SIZE=6>
<INPUT NAME=\"Qty14*\" SIZE=1><BR>"
        "Execution Status:
Total:<BR><HR>"
        "<INPUT TYPE=\"submit\"NAME=\"CMD\" VALUE=\"Process\">"
        "<INPUT TYPE=\"submit\"NAME=\"CMD\" VALUE=\"Menu\">"
        "</FORM>%s",
        pTPCC->sWId,HTMLTrailer);
}; // FormatNewOrder

//=====
//
// Function name: FormatPayment

```

```

//
//=====
VOID FormatPayment (CHAR * pOut,TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_PAYMENT;
    FormatFormHdr (pOut, "TPC-C Payment",pTPCC);
    sprintf (pOut + strlen (pOut),
        "<PRE>
        "Date:<BR><BR>"
        "Warehouse: %4.4d"
        "
        District: <INPUT NAME=\"DID*\" "
SIZE=1><BR><BR><BR><BR><BR>"
        "Customer: <INPUT NAME=\"CID*\" SIZE=4>"
        "Cust-Warehouse: <INPUT NAME=\"CWI*\" SIZE=4> "
        "Cust-District: <INPUT NAME=\"CDI*\" SIZE=1><BR>"
        "Name:
        <INPUT NAME=\"CLT*\" SIZE=16>
Since:<BR>"
        "
        Credit:<BR>"
        "
        Disc:<BR>"
        "
        Phone:<BR><BR>"
        "Amount Paid: $<INPUT NAME=\"HAM*\" SIZE=7> New Cust
Balance:<BR>"
        "Credit Limit:<BR><BR>Cust-Data: <BR><BR><BR><BR></PRE><HR>"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
        "</FORM>%s",
        pTPCC->sWId,HTMLTrailer);
}; // FormatPayment

//=====
//
// Function name: FormatDelivery
//
//=====
VOID FormatDelivery (CHAR * pOut,TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_DELIVERY;
    FormatFormHdr (pOut, "TPC-C Delivery",pTPCC);
    sprintf (pOut + strlen (pOut),
        "<PRE>
        "Warehouse: %4.4d<BR><BR>"
        "Carrier Number: <INPUT NAME=\"OCD*\" SIZE=1><BR><BR>"
        "Execution Status:<BR></PRE><HR>"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
        "</FORM>%s",
        pTPCC->sWId,HTMLTrailer);
}; // FormatDelivery

//=====
//
// Function name: FormatOrderStatus
//
//=====
VOID FormatOrderStatus (CHAR * pOut,TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_ORDERSTATUS;
    FormatFormHdr (pOut, "TPC-C Order-Status",pTPCC);
    sprintf (pOut + strlen (pOut),
        "<PRE>
        Order-Status<BR>"

```

```

        "Warehouse: %4.4d "
        "District: <INPUT NAME=\"DID*\" SIZE=1><BR>"
        "Customer: <INPUT NAME=\"CID*\" SIZE=4> Name:
<INPUT NAME=\"CLT*\" SIZE=23><BR>"
        "Cust-Balance:<BR><BR>"
        "Order-Number: Entry-Date: Carrier-
Number:<BR>"
        "Supply-W Item-Id Qty Amount Delivery-
Date<BR></PRE><HR>"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
        "</FORM>%s",
        pTPCC->sWId,HTMLTrailer);
}; // FormatOrderStatus

//=====
//
// Function name: FormatStockLevel
//
//=====
VOID FormatStockLevel (CHAR * pOut,TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_STOCKLEVEL;
    FormatFormHdr (pOut, "TPC-C Stock Level",pTPCC);
    sprintf (pOut + strlen (pOut),
        "<PRE>
        "Warehouse: %4.4d District: %2.2d<BR><BR>"
        "Stock Level Threshold: <INPUT NAME=\"TT*\" SIZE=2><BR><BR>"
        "low stock: <BR><HR>"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
        "</FORM>%s",
        pTPCC->sWId,pTPCC->sDId,HTMLTrailer);
}; // FormatStockLevel

//=====
//
// Function name: FormatFormHdr
//
//=====
VOID FormatFormHdr (CHAR * pOut,CHAR * pTitle,TPCC_STATE * pTPCC)
{
    sprintf (pOut,
        "%s<HTML><HEAD><TITLE>%s</TITLE></HEAD>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\" NAME=\"PI*\" VALUE=\"\">"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">",
        HTTPHdr,pTitle,pTPCC->uFormId,pTPCC->iTermId,pTPCC->iSyncId);
}; // FormatFormHdr

//=====
//
// Function name: FormatRespHdr
//
//=====
VOID FormatRespHdr (CHAR * pOut,CHAR * pTitle,TPCC_STATE * pTPCC)
{

```

```

sprintf(pOut,
"%s<HTML><HEAD><TITLE>%s</TITLE></HEAD>"
"<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"
"<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">"
"<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">"
"<INPUT TYPE=\"hidden\" NAME=\"TERMINID\" VALUE=\"%d\">"
"<INPUT TYPE=\"hidden\" NAME=\"SYNCD\" VALUE=\"%d\">",
HTTPHdr, pTitle, pTPCC->iStatusId, pTPCC->uFormId,
pTPCC->iTermId, pTPCC->iSyncId);
}; // FormatRespHdr

//=====
//
// Function name: FormatHTMLString
//
// Encodes HTML special characters. If necessary, space fills
// to pOut to total uLen characters.
//
//=====
VOID FormatHTMLString(CHAR * pOut, CHAR * pIn, UINT uLen)
{
while (uLen && *pIn)
{
switch (*pIn)
{
case '>':
*pOut++ = '&';
*pOut++ = 'g';
*pOut++ = 't';
*pOut++ = ';';
pIn++;
break;
case '<':
*pOut++ = '&';
*pOut++ = 'l';
*pOut++ = 't';
*pOut++ = ';';
pIn++;
break;
case '&':
*pOut++ = '&';
*pOut++ = 'a';
*pOut++ = 'm';
*pOut++ = 'p';
*pOut++ = ';';
pIn++;
break;
case '\\':
*pOut++ = '&';
*pOut++ = 'q';
*pOut++ = 'u';
*pOut++ = 'o';
*pOut++ = 't';
*pOut++ = ';';
pIn++;
break;
default:
*pOut++ = *pIn++;
break;
}; // switch (*pIn)

```

```

uLen--;
}; // while (uLen && *pIn)
while(uLen--)
*pOut++ = ' ';
*pOut = 0;
}; // FormatHTMLString

//=====
//
// Function name: FormatString
//
// Encodes formatted string for HTML transmission.
//
//=====
VOID FormatString(CHAR * pOut, CHAR * pPic, CHAR * pIn)
{
while(*pPic)
{
if (*pPic == 'X' )
{
if (*pIn)
*pOut++ = *pIn++;
else
*pOut++ = ' ';
}
else
*pOut++ = *pPic;
pPic++;
};
*pOut = 0;
}; // FormatString

//=====
// FUNCTION: UtilStrCpy
//
// Copies n characters from string pSrc to pDst and places a null
// null character at the end of the destination string. Unlike
// strncpy this function ensures that the result string is always
// null terminated.
//
//=====
VOID UtilStrCpy(CHAR * pDest, CHAR * pSrc, INT n)
{
strncpy(pDest, pSrc, n);
pDest[n] = '\\0';
return;
}; // UtilStrCpy

//=====
//
// Function name: CheckNumeric
//
// Result
// FALSE - string is all numeric
// TRUE - sting contains non-numeric characters
//
//=====
BOOL CheckNumeric(CHAR * pNum)
{
if (*pNum == 0 )

```



```

    return(TRUE);
    while (*pNum && isdigit(*pNum))
        pNum++;
    return(*pNum);
}; // CheckNumeric

```

## term.h

```

// term.h
#include <sys\timeb.h>

#define TMILLI_TIMEOUT 3600000 // One hour

typedef struct
{
    BOOL bInUse; // In use flag
    INT iTermId; // TermId
    LPVOID ConnID; // Connection Id
    INT iSyncId; // Sync Id
    SHORT sWID; // TPCC Warehouse Id
    SHORT sDID; // TPCC District Id
    struct _timeb tbLastAccess; // Last activity timestamp
} TERM_STATE;

BOOL TermInit(INT iSetMaxTerm);
VOID TermTerm(VOID);
TERM_STATE * TermAlloc(VOID);
TERM_STATE * TermGet(INT iTermId);
BOOL TermFree(INT iTermId);

```

## term.c

```

// term.c
//
// Copyright Unisys, 1997
//
#include <windows.h>
#include <stdio.h>
#include "diagio.h"
#include "timesupp.h"
#include "term.h"

TERM_STATE * pTArray;
INT iNextTerm = 0;
INT iMaxTerm = 0;
CRITICAL_SECTION csTerm;

VOID TermMaint(VOID);

//=====
//
// Function name: TermInit
// Creates and initializes the first TERMINITIAL TArray entries.
// Initializes critical section to control access to TArray. Assumes
// access to function is single threaded, no other threads will start
// until this function completes and that function is called once
// (DLL_PROCESS_ATTACH).

```

```

//
// Returns:
// FALSE TArray allocated and initialized
// TRUE TArray allocation failure
//
//=====
BOOL TermInit(INT iSetMaxTerm)
{
    INT iTermId;
    CHAR szDiag[MAX_DIAG_SZ];
    if (pTArray != NULL)
    {
        sprintf(szDiag,"TermInit(%ld): TArray Already Initialized\n",
            GetCurrentThreadId());
        DiagIoWrite(szDiag,DIAG_ERROR);
        return(TRUE);
    };
    InitializeCriticalSection(&csTerm);
    iMaxTerm = iSetMaxTerm;
    pTArray = (TERM_STATE *) malloc(sizeof(TERM_STATE) * (iMaxTerm + 1));
    if (pTArray == NULL)
    {
        sprintf(szDiag,"TermInit(%ld): malloc failed (%ld)\n",
            GetCurrentThreadId(),GetLastError());
        DiagIoWrite(szDiag,DIAG_ERROR);
        return(TRUE);
    }
    for (iTermId = 1; iTermId <= iMaxTerm; iTermId++)
        TermFree(iTermId);
    iNextTerm = 1;
    return(FALSE);
}; // TermInit

//=====
//
// Function name: TermTerm
// Frees TArray and deletes csTerm critical section. Assumes access
// to function is single threaded and no other threads are actively
// accessing TArray entries (DLL_PROCESS_DETACH).
//
//=====
VOID TermTerm(VOID)
{
    DeleteCriticalSection(&csTerm);
    if (pTArray != NULL)
        free(pTArray);
    iNextTerm = 0;
    iMaxTerm = 0;
}; // TermTerm

//=====
//
// Function name: TermAlloc
// Allocates empty TArray. Uses iNextTerm to start search.
//
// Returns:
// > 0 TArray entry index (iTermId)
// < 0 Empty TArray entry not available
//
//=====

```

```

TERM_STATE * TermAlloc(VOID)
{
    INT iTermId = -1;
    if (pTArray == NULL)
    {
        CHAR szDiag[MAX_DIAG_SZ];
        sprintf(szDiag, "TermAlloc(%ld): Term Array Not Allocated\n",
            GetCurrentThreadId());
        DiagIoWrite(szDiag, DIAG_ERROR);
        return(NULL);
    };
    EnterCriticalSection(&csTerm);
    try
    {
        while(iNextTerm <= iMaxTerm)
        {
            if (!pTArray[iNextTerm].bInUse)
            {
                pTArray[iNextTerm].bInUse = TRUE;
                _ftime(&pTArray[iNextTerm].tbLastAccess);
                iTermId = iNextTerm;
                iNextTerm++;
                break;
            };
            iNextTerm++;
        };
        // while(iNextTerm <= iMaxTerm) (1st Try)
        if (iTermId <= 0)
        {
            // No entry found. Perform maint and try again
            TermMaint();
            iNextTerm = 1;
            while(iNextTerm <= iMaxTerm)
            {
                if (!pTArray[iNextTerm].bInUse)
                {
                    pTArray[iNextTerm].bInUse = TRUE;
                    _ftime(&pTArray[iNextTerm].tbLastAccess);
                    iTermId = iNextTerm;
                    iNextTerm++;
                    break;
                };
                iNextTerm++;
            };
            // while(iNextTerm <= iMaxTerm) (2nd Try)
        };
        // if (iTermId <= 0)
        if (iTermId <= 0)
            iNextTerm = 1;
    }
    finally
    {
        LeaveCriticalSection(&csTerm);
    };
    if (iTermId > 0)
        return(&pTArray[iTermId]);
    else
        return(NULL);
}; // TermAlloc

```

```

//=====
//
// Function name: TermMaint
// Clears entries whose last access time exceeds TMILLI_TIMEOUT.
// Assumes caller has entered csTerm.
//
//=====
VOID TermMaint(VOID)
{
    INT iTermId;
    TMILLI tmElapsed;
    // Free entries that have timed out
    for (iTermId = 1; iTermId <= iMaxTerm; iTermId++)
    {
        if (pTArray[iTermId].bInUse)
        {
            tmElapsed = TimebElapsed(&pTArray[iTermId].tbLastAccess);
            if (tmElapsed > TMILLI_TIMEOUT)
                TermFree(iTermId);
        };
    };
}; // TermMaint

//=====
//
// Function name: TermGet
// Returns pointer to TArray slot at iTermId.
//
// Returns:
// FALSE TArray entry made available
// TRUE iTermId invalid.
//
//=====
TERM_STATE * TermGet(INT iTermId)
{
    TERM_STATE * pTerm;
    TMILLI tmElapsed;
    if (iTermId <= 0 || iTermId > iMaxTerm)
    {
        CHAR szDiag[MAX_DIAG_SZ];
        sprintf(szDiag, "TermGet(%ld): Invalid TermId (%ld)\n",
            GetCurrentThreadId(), iTermId);
        DiagIoWrite(szDiag, DIAG_ERROR);
        return(NULL);
    };
    pTerm = &pTArray[iTermId];
    if (!pTerm->bInUse)
        return(NULL);
    tmElapsed = TimebElapsed(&pTerm->tbLastAccess);
    if (tmElapsed > TMILLI_TIMEOUT)
        return(NULL); // Entry destined to be freed by maint
    _ftime(&pTArray[iTermId].tbLastAccess);
    return(&pTArray[iTermId]);
}; // TermGet

//=====
//
// Function name: TermFree
// Initializes contents of TArray slot at iTermId.
//

```

```

// Returns:
// FALSE TArray entry made available
// TRUE iTermId invalid.
//
//=====
BOOL TermFree(INT iTermId)
{
    TERM_STATE * pTerm;
    if (iTermId <= 0 || iTermId > iMaxTerm)
    {
        CHAR szDiag[MAX_DIAG_SZ];
        sprintf(szDiag,"TermFree(%ld): Invalid TermId (%ld)\n",
            GetCurrentThreadId(), iTermId);
        DiagIoWrite(szDiag,DIAG_ERROR);
        return(TRUE);
    };
    pTerm = &pTArray[iTermId];
    pTerm->ConnID = 0;
    pTerm->sWId = 0;
    pTerm->sDId = 0;
    pTerm->iSyncId = 0;
    pTerm->iTermId = iTermId;
    TimebClear(&pTerm->tbLastAccess);
    pTerm->bInUse = FALSE;
}; // TermFree

```

## tmon.h

```

// tmon.h

typedef struct
{
    CHAR * pszErrTxt;           // Error text
    CHAR * pTMDData;          // TM buffer area
    LONG lTMDDataLen;         // TM buffer len
} TMON_STATE;

VOID TMonInit(INT iSetMaxMsg);
VOID TMonTerm(VOID);
BOOL TMinInit(TMON_STATE * pTMon);
VOID TMDone(TMON_STATE * pTMon);
BOOL TMTran(CHAR * pService,TMON_STATE * pTMon,
    BOOL * bTPRslt,INT * iTPRslt);
BOOL TMPost(CHAR * pService,TMON_STATE * pTMon);

```

## tmon.c

```

// tmon.c
//
// Copyright Unisys, 1997
//
#include <windows.h>
#include <stdio.h>
#include <atmi.h>
#include "tmon.h"

INT iTMMaxSz;

```

```

//=====
//
// Function name: TMonInit
//
//=====
VOID TMonInit(INT iSetMaxMsg)
{
    iTMMaxSz = iSetMaxMsg;
}; // TMonInit

//=====
//
// Function name: TMonTerm
//
//=====
VOID TMonTerm(VOID)
{
}; // TMonTerm

//=====
//
// Function name: TMinInit
//
// Result:
// FALSE Initialization completed successfully
// TRUE Initialization failed
//
//=====
BOOL TMinInit(TMON_STATE * pTMon)
{
    BOOL bRslt = FALSE;
    TPINIT * tpinfo;

    // Must have ErrTxt message area set before init
    if (pTMon->pszErrTxt == NULL)
        return(TRUE);
    tpinfo = (TPINIT *) tmalloc("TPINIT",NULL,TPINITNEED(20));
    memset(tpinfo,0,sizeof(TPINIT));
    tpinfo->flags=TPMULTICONTEXTS;
    sprintf(tpinfo->cltname,"tpcc%d",GetCurrentThreadId());

    if (tpinit(tpinfo) == -1)
    {
        sprintf(pTMon->pszErrTxt,"TPInit Failed(%ld)",tperrno);
        bRslt = TRUE;
    }
    else
    {
        pTMon->pTMDData = tmalloc("CARRAY",NULL,iTMMaxSz);
        if (pTMon->pTMDData == NULL)
        {
            sprintf(pTMon->pszErrTxt,"TAlloc Failed(%ld)",tperrno);
            bRslt = TRUE;
        };
    };

    return(bRslt);
}; // TMinInit

```

```

//=====
//
// Function name: TMDone
//
//=====
VOID TMDone(TMON_STATE * pTMon)
{
    tpfree(pTMon->pTMDData);
    tpterm();
}; // TMDone

//=====
//
// Function name: TMTran
//
// Result:
// FALSE call completed. bTPRslt contains outcome (FALSE tran
// success). iTPRslt contains application returned
// result code.
// TRUE TM interface error, ErrTxt has diagnostic.
//
//=====
BOOL TMTran(CHAR * pService,TMON_STATE * pTMon,
            BOOL * bTPRslt,INT * iTPRslt)
{
    BOOL bRslt = FALSE;
    INT iGRply;

    iGRply = tpcall(pService,pTMon->pTMDData,iTMMMaxSz,
        &pTMon->pTMDData,&pTMon->lTMDDataLen,TPNOTIME | TPSIGRSTRT);
    if (iGRply != -1)
    {
        *iTPRslt = tpurcode;
        *bTPRslt = FALSE;
    }
    else
    if (tperrno == TPESVCFAIL)
    {
        *iTPRslt = tpurcode;
        *bTPRslt = TRUE;
    }
    else
    {
        sprintf(pTMon->pszErrTxt,"TPCall Failed (%ld)",tperrno);
        bRslt = TRUE;
    };
    return(bRslt);
}; // TMTran

//=====
//
// Function name: TMPost
//
// Result:
// FALSE transaction submitted with no response expected
// TRUE tpacall failed, ErrTxt has diagnostic
//
//=====
BOOL TMPost(CHAR * pService,TMON_STATE * pTMon)

```

```

{
    BOOL bRslt = FALSE;
    INT iCD;

    iCD = tpacall(pService,pTMon->pTMDData,iTMMMaxSz,TPNOREPLY);
    if (iCD == -1)
    {
        sprintf(pTMon->pszErrTxt,"TPACall Failed (%ld)",tperrno);
        bRslt = TRUE;
    };
    return(bRslt);
}; // TMPost

```

## timesupp.h

```

// timesupp.h

#include <windows.h>
#include <time.h>
#include <sys\timeb.h>

#define TIMEBSEED_MOD 10000
#define TIMEBSEED_SHIFT 1000
#define TIMEB_STRING_SZ 23
#define TIMEB_STRING_DATESZ 10
#define TIMEB_STRING_TIMEOFFSET 11
#define TIMEB_STRING_TIMESZ 12

typedef ULONG TMILLI;

TMILLI TimebDiff(struct _timeb * p_tb1, struct _timeb * p_tb2);
VOID TimebCopy(struct _timeb * p_tbDest, struct _timeb * p_tbSource);
TMILLI TimebElapsed(struct _timeb * p_tb1);
VOID TimebClear(struct _timeb * p_tb1);
CHAR * TimebToString(struct _timeb * p_tb1,CHAR * psz,BOOL bMillis);
BOOL TimebFromString(struct _timeb * p_tb1,CHAR * psz);
VOID TimebAddSecs(struct _timeb * p_tb1,INT iSeconds);
ULONG TimebSeed(VOID);

```

## timesupp.c

```

// timesupp.c
//
// Copyright Unisys, 1997
//
#include <stdio.h>
#include "timesupp.h"

//=====
//
// Function name: TimebCopy
// Structure contents copy of _timeb source to _timeb dest.
//
//=====
VOID TimebCopy(struct _timeb * p_tbDest, struct _timeb * p_tbSource)
{
    p_tbDest->time = p_tbSource->time;
}

```

```

    p_tbDest->millitm = p_tbSource->millitm;
    p_tbDest->dstflag = p_tbSource->dstflag;
    p_tbDest->timezone = p_tbSource->timezone;
}; // TimebCopy

//=====
//
// Function name: TimebDiff
// Time difference in milliseconds between _timeb_t1 and _timeb_t2.
//
//=====
TMILLI TimebDiff(struct _timeb * p_tb1, struct _timeb * p_tb2)
{
    LONG lRslt;
    lRslt = ((p_tb2->time - p_tb1->time) * 1000) +
            (p_tb2->millitm - p_tb1->millitm);
    if (lRslt < 0)
        return(0);
    else
        return((TMILLI) lRslt);
}; // TimebDiff

//=====
//
// Function name: TimebElapsed
//
//=====
TMILLI TimebElapsed(struct _timeb * p_tb1)
{
    struct _timeb _tb2;
    _ftime(&_tb2);
    return (TimebDiff(p_tb1,&_tb2));
}; // TimebElapsed

//=====
//
// Function name: TimebClear
//
//=====
VOID TimebClear(struct _timeb * p_tb1)
{
    p_tb1->time = 0;
    p_tb1->millitm = 0;
}; // TimebClear

//=====
//
// Function name: TimebToString
// Converts timeb to yyyy:mm:dd,hh:mm:ss.sss format
//
//=====
CHAR * TimebToString(struct _timeb * p_tb1,CHAR * psz,BOOL bMillis)
{
    struct tm * ptm;
    ptm = localtime(&p_tb1->time);
    sprintf(psz,"%4.4d/%2.2d/%2.2d,%2.2d:%2.2d:%2.2d",

```

```

    ptm->tm_year + 1900,ptm->tm_mon + 1,ptm->tm_mday,
    ptm->tm_hour,ptm->tm_min,ptm->tm_sec);
    if (bMillis)
        sprintf(psz + strlen(psz),".%3.3d",p_tb1->millitm);
    return(psz);
}; // TimebToString

//=====
//
// Function name: TimebFromString
// Converts yyyy:mm:dd,hh:mm:ss.sss (TimebToString) format to timeb
//
//=====
BOOL TimebFromString(struct _timeb * p_tb1,CHAR * psz)
{
    struct tm tmTime;
    struct tm * ptm;
    UINT uLen;

    ptm = &tmTime;
    uLen = strlen(psz);
    if (uLen < (TIMEB_STRING_SZ - 4)) // millis are optional
    {
        p_tb1->time = 0;
        p_tb1->millitm = 0;
        return (TRUE);
    };
    // Clear fields that won't be set
    ptm->tm_wday = 0;
    ptm->tm_yday = 0;
    ptm->tm_isdst = -1;
    // Set tm struct fields from string
    ptm->tm_year = (atoi(psz)) - 1900;
    psz += 5;
    ptm->tm_mon = (atoi(psz)) - 1;
    psz += 3;
    ptm->tm_mday = atoi(psz);
    psz += 3;
    ptm->tm_hour = atoi(psz);
    psz += 3;
    ptm->tm_min = atoi(psz);
    psz +=3;
    ptm->tm_sec = atoi(psz);
    if (uLen >= TIMEB_STRING_SZ) // Millis present
    {
        psz += 3;
        p_tb1->millitm = atoi(psz);
    };
    p_tb1->time = mktime(ptm);
    return (FALSE);
}; // TimebFromString

//=====
//
// Function name: TimebAddSecs
//
//=====
VOID TimebAddSecs(struct _timeb * p_tb1,INT iSeconds)
{
    p_tb1->time += iSeconds;

```

```
}; // TimebAddSecs
```

## diagio.h

```
// diagio.h
```

```
// Environment variable defaults  
#define DEFAULTDIAGLEVEL DIAG_INFO  
#define DEFAULTEVENTLOG 0
```

```
#define DIAGNOSTICS TRUE  
#define MAX_DIAG_SZ 2000
```

```
// Severity level of diagnostic report  
#define DIAG_FORCE 1  
#define DIAG_ERROR 2  
#define DIAG_STATE 3  
#define DIAG_INFO 4
```

```
VOID DiagIoInit(CHAR * pDiagId,BOOL bConsole,BOOL bEvent,UINT uLevel);  
VOID DiagIoTerm(VOID);  
VOID DiagIoWrite(CHAR * pDiagBuffer, UINT uSeverity);
```

## diagio.c

```
// diagio.c
```

```
//  
// Copyright Unisys, 1997  
//  
#include <windows.h>  
#include <stdio.h>  
#include "diagio.h"
```

```
CRITICAL_SECTION csDiagIo;  
HANDLE hEventLog = NULL;  
UINT uDiagLevel;  
BOOL bEventLog;  
BOOL bConsoleLog;  
CHAR * pDiagHdr;  
CHAR * pEventHost;  
CHAR * pErrHdr =  
    {"*** ERROR *** ERROR *** ERROR *** ERROR *** ERROR ***"};
```

```
INT WriteEventLog(CHAR * pMsgs[],UINT uMsgCnt,UINT uSeverity);
```

```
//=====  
//  
// Function name: DiagIoInit  
//  
//=====  
VOID DiagIoInit(CHAR * pDiagId,BOOL bConsole,BOOL bEvent,UINT uLevel)  
{  
    if (DIAGNOSTICS)  
    {  
        InitializeCriticalSection(&csDiagIo);  
  
        uDiagLevel = uLevel;  
        bEventLog = bEvent;
```

```
bConsoleLog = bConsole;  
pEventHost = (CHAR *) malloc(10);  
strcpy(pEventHost,""); // local host  
pDiagHdr = (CHAR *) malloc(strlen(pDiagId) + 1);  
strcpy(pDiagHdr,pDiagId);  
if (bEventLog)  
{  
    hEventLog = RegisterEventSource(pEventHost,pDiagId);  
    if (hEventLog == NULL)  
    {  
        bEventLog = FALSE;  
        if (bConsoleLog)  
            fprintf(stdout,  
                "%s: Event Log Register Failed (%ld)\n"  
                "Event Log Will NOT be Used\n",  
                pDiagHdr,GetLastError());  
    }  
    else  
    {  
        if (bConsoleLog)  
            fprintf(stdout,"%s: Event Logging to LocalHost as %s\n",  
                pDiagHdr,pDiagHdr);  
    }  
}; // if bEventLog  
}; // if Diagnostics  
}; // DiagIoInit
```

```
//=====  
//  
// Function name: DiagIoTerm  
//  
//=====  
VOID DiagIoTerm(VOID)  
{  
    if (DIAGNOSTICS)  
    {  
        DeleteCriticalSection(&csDiagIo);  
        if (hEventLog != NULL)  
            DeregisterEventSource(hEventLog);  
        free(pDiagHdr);  
        free(pEventHost);  
    }  
}; // DiagIoTerm
```

```
//=====  
//  
// Function name: DiagIoWrite  
//  
//=====  
VOID DiagIoWrite(CHAR * pDiagBuffer, UINT uSeverity)  
{  
    CHAR * pMsgs[3];  
    UINT uMsgCnt = 0;  
    INT iERslt = 0;  
    if (DIAGNOSTICS)  
    {  
        if (uDiagLevel >= uSeverity)  
        {  
            EnterCriticalSection(&csDiagIo);
```

```

    try
    {
        if (uSeverity == DIAG_ERROR)
        {
            pDMsgs[0] = pDiagHdr;
            pDMsgs[1] = pErrHdr;
            pDMsgs[2] = pDiagBuffer;
            uMsgCnt = 3;
        }
        else
        {
            pDMsgs[0] = pDiagHdr;
            pDMsgs[1] = pDiagBuffer;
            uMsgCnt = 2;
        }
        if (bEventLog)
            iERslt = WriteEventLog(pDMsgs, uMsgCnt, uSeverity);
        if (bConsoleLog)
        {
            if (uMsgCnt == 3)
                fprintf(stdout, "\n%s:
%s\n%s", pDMsgs[0], pDMsgs[1], pDMsgs[2]);
            else
                fprintf(stdout, "\n%s: %s", pDMsgs[0], pDMsgs[1]);
            if (iERslt != 0)
                fprintf(stdout,
                    "EventLog Write Failed (%ld), No Longer in Use\n",
                    iERslt);
        }
    };
    finally
    {
        LeaveCriticalSection(&csDiagIo);
    };
}; // if uDiagLevel >= uSeverity
}; // if Diagnostics
}; // DiagIoWrite

```

```

INT WriteEventLog(CHAR * pDMsgs[], UINT uMsgCnt, UINT uSeverity)
{
    WORD wType;
    WORD wCount;
    wCount = uMsgCnt;
    switch (uSeverity)
    {
        case DIAG_ERROR:
            wType = EVENTLOG_ERROR_TYPE;
            break;
        default:
            wType = EVENTLOG_INFORMATION_TYPE;
            break;
    };
    if (wType != 0)
    {
        if (!ReportEvent(hEventLog, // event log handle
            wType, // event type
            0, // category zero
            uSeverity, // no event identifier
            NULL, // no user security identifier
            wCount, // # of substitution strings

```

```

        0, // no binary data
        (LPCTSTR *) pDMsgs, // address of string array
        NULL) // address of binary
    {
        DeregisterEventSource(hEventLog);
        hEventLog = NULL;
        bEventLog = FALSE;
        return(GetLastError());
    }; // ReportEvent failed
}; // if wType != 0
return(0);
}; // WriteEventLog

```

## SERVER MAKEFILES

```

SVR = tpccsvr
SRC = \webrte\tpcctux\tpccsvr.c
DBG = /f "/Zi"
$(SVR).exe: $(SRC)
    erase $(SVR).exe
    $(TUXDIR)\bin\buildserver /f "$(SRC)" /o $(SVR).exe /s
NEWORDER:NEWORDER /s PAYMENT:PAYMENT /s ORDERSTS:ORDERSTS /s
STOCKLVL:STOCKLVL -l i:\mssql7\devtools\lib\ntwdblib.lib
copy $(SVR).exe $(APPDIR)

```

```

SVR = tpccdelv
SRC = \webrte\tpcctux\tpccdelv.c
DBG = /f "/Zi"
$(SVR).exe: $(SRC)
    erase $(SVR).exe
    $(TUXDIR)\bin\buildserver /f "$(SRC)" /o $(SVR).exe /s
DELIVERY:DELIVERY -l i:\mssql7\devtools\lib\ntwdblib.lib
copy $(SVR).exe $(APPDIR)

```

## tpccsvr.h

```

// tpccsvr.h
//
// Copyright Unisys, 1997
// Copyright Microsoft, 1996

#include "tpcc.h"

#define DEFCLPACKSIZE 2000
#define DEADLOCKWAIT 10
#define LOGFILE_NAME "delilog"

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20

```

## tpcc.h

```
// tpcc.h

#include <time.h>
#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

// TPCCHandler return codes
#define TPCCSEND 1
#define TPCCSENDEND 2
#define TPCCENDNOW 3

// TPC Service return codes
#define SVC_BADITEMID 1
#define SVC_NOERROR 0
#define SVCERR_DEADLOCK -1
#define SVCERR_NOCUSTOMER -2
#define SVCERR_NOORDERS -3
#define SVCERR_DBLIB -4

// Min/Max transaction data definitions
#define MIN_DID 1
#define MAX_DID 10
#define MIN_OL 5
#define MAX_OL 15
#define MIN_QUANTITY 1
#define MAX_QUANTITY 10
#define MIN_ITEM_ID 1
#define MAX_ITEM_ID 100000
#define MIN_CUST_ID 1
#define MAX_CUST_ID 3000
#define MIN_CARRIER 1
#define MAX_CARRIER 10
#define MIN_THRESHOLD 10
#define MAX_THRESHOLD 20

// pTPCC->iStatusId codes
#define INVALID_IID 1
#define STATUS_OK 0
#define ERR_CMD_UNKNOWN -10
#define ERRTXT_CMD_UNKNOWN "Unrecognized Command"
#define ERR_ALREADY_LOGGEDIN -11
#define ERRTXT_ALREADY_LOGGEDIN "Already Logged In"
#define ERR_TERMID -12
#define ERRTXT_TERMID "TermId or SyncId in Error"
#define ERR_FORM_UNKNOWN -13
#define ERRTXT_FORM_UNKNOWN "Unrecognized FormId"
#define ERR_WID_INVALID -14
#define ERR_DID_INVALID -15
#define ERR_MISSING_KEY -16
#define ERR_NOT_NUMERIC -17
#define ERR_THRESHOLD_RANGE -18
#define ERR_EMBEDDED_EMPTY_OL -19
#define ERR_QUANTITY_INVALID -20
#define ERR_OL_INVALID -21
#define ERR_OL_COUNT -22
#define ERR_TM_INTERFACE -23
#define ERR_SERVICE_RSLT -24
```

```
#define ERR_INPUT_TOOLONG -25
#define ERR_IDANDNAME_EMPTY -26
#define ERR_IDANDNAME_ENTERED -27
#define ERR_AMOUNT_BADFORM -28
#define ERR_AMOUNT_INVALID -29
#define ERR_CARRIER_INVALID -30
#define ERR_TERM_ALLOC -31

#define STATUS_LEN 200
#define NAME_LEN 16
#define ADDR_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9

#define MAX_MSG_SZ 5000

typedef struct
{
    short ol_supply_w_id;
    long ol_i_id;
    char ol_i_name[25];
    short ol_quantity;
    char ol_brand_generic[2];
    double ol_i_price;
    double ol_amount;
    short ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    short o_ol_cnt;
    char c_last[NAME_LEN + 1];
    char c_credit[3];
    double c_discount;
    double w_tax;
    double d_tax;
    long o_id;
    short o_commit_flag;
    DBDATEREK o_entry_d;
    short o_all_local;
    double total_amount;
    char execution_status[STATUS_LEN];
    OL_NEW_ORDER_DATA ol[MAX_OL];
} NEW_ORDER_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    DBDATEREK h_date;
    char w_street_1[ADDR_LEN + 1];
    char w_street_2[ADDR_LEN + 1];
    char w_city[ADDR_LEN + 1];
```



```

char w_state[STATE_LEN + 1];
char w_zip[ZIP_LEN + 1];
char d_street_1[ADDR_LEN + 1];
char d_street_2[ADDR_LEN + 1];
char d_city[ADDR_LEN + 1];
char d_state[STATE_LEN + 1];
char d_zip[ZIP_LEN + 1];
char c_first[NAME_LEN + 1];
char c_middle[3];
char c_last[NAME_LEN + 1];
char c_street_1[ADDR_LEN + 1];
char c_street_2[ADDR_LEN + 1];
char c_city[ADDR_LEN + 1];
char c_state[STATE_LEN + 1];
char c_zip[ZIP_LEN + 1];
char c_phone[16];
DBDATEREC c_since;
char c_credit[3];
double c_credit_lim;
double c_discount;
double c_balance;
char c_data[200+1];
char execution_status[STATUS_LEN];
} PAYMENT_DATA;

typedef struct
{
    long ol_i_id;
    short ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    DBDATEREC ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    char c_first[NAME_LEN + 1];
    char c_middle[3];
    char c_last[NAME_LEN + 1];
    double c_balance;
    long o_id;
    DBDATEREC o_entry_d;
    short o_carrier_id;
    OL_ORDER_STATUS_DATA OlOrderStatusData[MAX_OL];
    short o_ol_cnt;
    char execution_status[STATUS_LEN];
} ORDER_STATUS_DATA;

typedef struct
{
    short w_id;
    short o_carrier_id;
    long o_id[10];
    int iComplete;
    SYSTEMTIME QTime;           // time delivery was queued
    SYSTEMTIME EndTime;        // time delivery completed
    char execution_status[STATUS_LEN];

```

```

} DELIVERY_DATA;
typedef struct
{
    short w_id;
    short d_id;
    short thresh_hold;
    long low_stock;
    char execution_status[STATUS_LEN];
} STOCK_LEVEL_DATA;

```

## tpccsvr.c

```

// tpccsvr.c
//
// Copyright Unisys, 1997
// Copyright Microsoft, 1996

#include <windows.h>
#include <malloc.h>
#include <stdarg.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>

#include <atmi.h>
#include <userlog.h>

#include "tpccsvr.h"

char    szServer[32]    = "tpccserver";
char    szUser[32]      = { 0 };
char    szPassword[32] = { 0 };
char    szDatabase[32] = "tpcc";
char    szService[16]  = "tpccsvr";
char    szWork[200];
PDBPROCESS dbproc;
int     spid;           // spid assigned from dblink
BOOL    bFailed;
BOOL    bDeadlock;
short   DeadlockRetry = (short)3;

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
char *dberstr, char *oserrstr);
int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity, char *msgtext);
int SQLStockLevel(STOCK_LEVEL_DATA *psld);
int SQLNewOrder(NEW_ORDER_DATA *pnod);
int SQLPayment(PAYMENT_DATA *ppd);
int SQLOrderStatus(ORDER_STATUS_DATA *pOrderStatus);
void UtilStrCpy(char *pDest, char *pSrc, int n);
VOID GetArgs(INT argc, CHAR **argv);

//=====
//
// Function name: tpsvrinit
//

```

```

//=====
tpsvrinit(int argc, char *argv[])
{
    GetArgs(argc, argv);
    sprintf(szWork, "%s Started, DBServer=%s, DB=%s",
            szService, szServer, szDatabase);
    userlog(szWork);
    if (SQLInit(szServer, szDatabase, szUser, szPassword))
        return(-1);
    userlog("Database open, initialization complete");
    return(0);
}; // tpsvrinit

//=====
//
// Function name: tpsvrdone
//
//=====
void tpsvrdone()
{
    userlog("Shutdown request for tpcctux server");
    dbclose(dbproc);
    dbexit();
}; // tpsvrdone

//=====
//
// Function name: NEWORDER
//
// Entry point called by tuxedo for NEWORDER service requests.
//
//=====
void NEWORDER(TPSVCINFO * svcinfo)
{
    int iRslt;
    NEW_ORDER_DATA * pnod;

    pnod = (NEW_ORDER_DATA *) svcinfo->data;
    iRslt = SQLNewOrder(pnod);

    // Check for DBLib termination error
    if (bFailed)
    {
        strcpy(pnod->execution_status, szWork);
        tpreturn(TPFAIL, SVCERR_DBLIB, svcinfo->data, svcinfo->len, 0);
    }
    else
    if (iRslt == 0)
        tpreturn(TPSUCCESS, 0, svcinfo->data, svcinfo->len, 0);
    else
        tpreturn(TPFAIL, iRslt, svcinfo->data, svcinfo->len, 0);
}; // NEWORDER

//=====
//
// Function name: PAYMENT
//
// Entry point called by tuxedo for PAYMENT service requests.
//
//=====

```

```

void PAYMENT(TPSVCINFO * svcinfo)
{
    int iRslt;
    PAYMENT_DATA * ppd;

    ppd = (PAYMENT_DATA *) svcinfo->data;

    iRslt = SQLPayment(ppd);

    if (bFailed)
    {
        strcpy(ppd->execution_status, szWork);
        tpreturn(TPFAIL, SVCERR_DBLIB, svcinfo->data, svcinfo->len, 0);
    }
    else
    if (iRslt == 0)
        tpreturn(TPSUCCESS, 0, svcinfo->data, svcinfo->len, 0);
    else
        tpreturn(TPFAIL, iRslt, svcinfo->data, svcinfo->len, 0);
}; // PAYMENT

//=====
//
// Function name: ORDERSTS
//
// Entry point called by tuxedo for ORDERSTS service requests.
//
//=====
void ORDERSTS(TPSVCINFO * svcinfo)
{
    int iRslt;
    ORDER_STATUS_DATA * posd;

    posd = (ORDER_STATUS_DATA *) svcinfo->data;
    iRslt = SQLOrderStatus(posd);

    // Check for DBLib termination error
    if (bFailed)
    {
        strcpy(posd->execution_status, szWork);
        tpreturn(TPFAIL, SVCERR_DBLIB, svcinfo->data, svcinfo->len, 0);
    }
    else
    if (iRslt == 0)
        tpreturn(TPSUCCESS, 0, svcinfo->data, svcinfo->len, 0);
    else
        tpreturn(TPFAIL, iRslt, svcinfo->data, svcinfo->len, 0);
}; // ORDERSTS

//=====
//
// Function name: STOCKLVL
//
// Entry point called by tuxedo for STOCKLVL service requests.
//
//=====
void STOCKLVL(TPSVCINFO * svcinfo)
{
    int iRslt;
    STOCK_LEVEL_DATA * psld;

```

```

psld = (STOCK_LEVEL_DATA *) svcinfo->data;
iRslt = SQLStockLevel(psld);

// Check for DBLib termination error
if (bFailed)
{
    strcpy(psld->execution_status,szWork);
    tpreturn(TPFAIL,SVCERR_DBLIB,svcinfo->data,svcinfo->len,0);
}
else
if (iRslt == 0)
    tpreturn(TPSUCCESS,0,svcinfo->data,svcinfo->len,0);
else
    tpreturn(TPFAIL,iRslt,svcinfo->data,svcinfo->len,0);
}; // STOCKLVL

//=====
//
// Function name: SQLInit
//
// Set global dbproc and spid.
//
// Result:
// FALSE - database open, dbproc valid
// TRUE - database open failed
//
//=====
BOOL SQLInit(CHAR * pSvr,CHAR * pDB,CHAR * pUsr,CHAR * pPW,CHAR * pSvc)
{
    char szApp[32];
    char server[256];
    char database[256];
    char user[256];
    char password[256];
    LOGINREC *login;

    dbinit();
    // install error and message handlers
    dbmsghandle((DBMSGHANDLE_PROC)msg_handler);
    dberrhandle((DBERRHANDLE_PROC)err_handler);

    dbproc = NULL;
    strcpy(server,pSvr);
    strcpy(database,pDB);
    strcpy(user,pUsr);
    strcpy(password,pPW);
    sprintf(szApp,"%s%d",pSvc,_getpid());

    login = dblogin();
    if (!*user )
        DBSETLUSER(login,"sa");
    else
        DBSETLUSER(login,user);
    DBSETLPWD(login,password);
    DBSETLHOST(login,szApp);
    DBSETLVERSION(login,DBVER60);
    // DBSETLPACKET(login,(unsigned short)DEFCLPACKSIZE);

```

```

if ((dbproc = dbopen(login,server)) == NULL)
{
    userlog("dbopen failed");
    return TRUE;
};
// Use the the right database
dbuse(dbproc,database);
dbcmd(dbproc,"select @@spid");
dbsqlxexec(dbproc);
while (dbresults(dbproc) != NO_MORE_RESULTS)
{
    dbbind(dbproc,1,SMALLBIND,(DBINT) 0,(BYTE *) spid);
    while (dbnextrow(dbproc) != NO_MORE_ROWS)
        ;
};

dbcmd(dbproc,"set nocount on");
dbsqlxexec(dbproc);
while (dbresults(dbproc) != NO_MORE_RESULTS)
{
    while (dbnextrow(dbproc) != NO_MORE_ROWS)
        ;
};

//rollback transaction on abort
dbcmd(dbproc,"set XACT_ABORT ON");
dbsqlxexec(dbproc);
while (dbresults(dbproc) != NO_MORE_RESULTS)
{
    while (dbnextrow(dbproc) != NO_MORE_ROWS)
        ;
};

return(FALSE);
}; // SQLInit

//=====
// FUNCTION: err_handler
//
// Handles DB-Library errors
//
// ARGUMENTS:
// DBPROCESS *dbproc DBPROCESS id pointer
// int severity severity of error
// int dberr error id
// int oserr operating system specific error code
// char *dberrstr printable error description of dberr
// char *oserrstr printable error description of oserr
//
// RETURNS:
// int INT_CANCEL
//
// COMMENTS: None
//
//=====
int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
char *dberrstr, char *oserrstr)
{
    if ((dbproc == NULL) || (DBDEAD(dbproc)))

```

```

{
    userlog("ErrHandler: DBPROC is invalid");
    return INT_CANCEL;
};
if (bFailed)
    return INT_CANCEL;
if (oserr != DBNOERR)
{
    sprintf(szWork, "ErrHandler: OSErr(%ld) - %s", oserr, oserrstr);
    userlog(szWork);
    bFailed = TRUE;
};

return INT_CANCEL;

}; // err_handler

//=====
// FUNCTION: msg_handler
//
// Handles DB-Library SQL Server error messages
//
// ARGUMENTS:
// DBPROCESS *dbproc    DBPROCESS id pointer
// DBINT      msgno      message number
// int        msgstate   message state
// int        severity   message severity
// char      *msgtext    printable message description
//
// RETURNS:   int        INT_CONTINUE   continue operation
//            int        INT_CANCEL     cancel operation
//
// COMMENTS:  This function also sets the dead lock dbproc
//            variable if necessary.
//
//=====
int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity, char *msgtext)
{
    if ((msgno == 5701) || (msgno == 2528) ||
        (msgno == 5703) || (msgno == 6006))
        return INT_CONTINUE;

    // deadlock message
    if (msgno == 1205)
    {
        // set the deadlock indicator
        bDeadlock = TRUE;
        return INT_CONTINUE;
    };

    if (bFailed)
        return INT_CANCEL;

    if (msgno == 0)
        return INT_CONTINUE;
    else
    {
        sprintf(szWork, "MsgHandler: MsgNo(%ld) - %s", msgno, msgtext);

```

```

        userlog(szWork);
        bFailed = TRUE;
    };

    return INT_CANCEL;
}; // msg_handler

//=====
// FUNCTION: SQLStockLevel
//
// Handles the stock level transaction.
//
// ARGUMENTS:
// STOCK_LEVEL_DATA StockLevel input / output data structure
// dbdata (global)
// bDeadlock (global)
//
// RETURNS:
// SVC_NOERROR success
// !SVC_NOERROR failure
//
// COMMENTS:  None
//
//=====
int SQLStockLevel(STOCK_LEVEL_DATA * psld)
{
    int tryit;
    short num_deadlocks = 0;
    RETCODE rc;
    BYTE * pData;

    bFailed = FALSE;
    bDeadlock = FALSE;

    for (tryit=0; tryit < DeadlockRetry; tryit++)
    {
        if (dbrpcinit(dbproc, "tpcc_stocklevel", 0) == SUCCEED)
        {
            dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                (BYTE *) &psld->w_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT1, -1, -1,
                (BYTE *) &psld->d_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                (BYTE *) &psld->thresh_hold);

            if (dbrpcexec(dbproc) == SUCCEED)
            {
                while (((rc = dbresults(dbproc)) != NO_MORE_RESULTS) &&
                    (rc != FAIL))
                {
                    if (DBROWS(dbproc))
                    {
                        while (((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) &&
                            (rc != FAIL))
                        {
                            if (pData=dbdata(dbproc, 1))
                                psld->low_stock = *((long *) pData);
                        };
                    };
                }; // if (DBROWS(dbproc))
            }
        }
    }
}

```

```

        }; // while (dbresults)
    }; // if (dbrpcexec)
}; // if (dbrpcinit)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("StockLevel Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{
    strcpy(psld->execution_status,"Transaction committed.");
    return(SVC_NOERROR);
};
}; // for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(psld->execution_status,"Hit deadlock max.");
userlog("StockLevel Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);
}; // SQLStockLevel

//=====
// FUNCTION: SQLNewOrder
//
// Handles the new order transaction.
//
// ARGUMENTS:
// NEW_ORDER_DATA NewOrder structure for input/output data
// dbdata (global)
// bDeadlock (global)
//
// RETURNS:
// SVC_NOERROR success
// !SVC_NOERROR failure
//
// COMMENTS: None
//
//=====
int SQLNewOrder(NEW_ORDER_DATA * pnod)
{
    RETCODE rc;
    int i;
    DBINT commit_flag;
    short num_deadlocks = 0;
    int tryit;
    DBDATETIME datetime;
    BYTE * pData;

    bFailed = FALSE;
    bDeadlock = FALSE;

    for (tryit=0; tryit < DeadlockRetry; tryit++)
    {
        if (dbrpcinit(dbproc,"tpcc_neworder",0) == SUCCEED)
        {
            dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                (BYTE *) &pnod->w_id);

```

```

            dbrpcparam(dbproc, NULL, 0, SQLINT1, -1, -1,
                (BYTE *) &pnod->d_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT4, -1, -1,
                (BYTE *) &pnod->c_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT1, -1, -1,
                (BYTE *) &pnod->o_ol_cnt);

            pnod->o_all_local = 1;
            for (i = 0; i < pnod->o_ol_cnt; i++)
            {
                if (pnod->o_all_local &&
                    pnod->Ol[i].ol_supply_w_id != pnod->w_id )
                    pnod->o_all_local = 0;
            };
            dbrpcparam(dbproc, NULL, 0, SQLINT1, -1, -1,
                (BYTE *) &pnod->o_all_local);

            for (i = 0; i < pnod->o_ol_cnt; i++)
            {
                dbrpcparam(dbproc, NULL, 0, SQLINT4, -1, -1,
                    (BYTE *) &pnod->Ol[i].ol_i_id);
                dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                    (BYTE *) &pnod->Ol[i].ol_supply_w_id);
                dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                    (BYTE *) &pnod->Ol[i].ol_quantity);
            };

            if (dbrpcexec(dbproc) == SUCCEED)
            {
                pnod->total_amount=0;
                // Get results from order line
                for (i = 0; i<pnod->o_ol_cnt; i++)
                {
                    if ((rc = dbresults(dbproc)) != NO_MORE_RESULTS) &&
                        (rc != FAIL))
                    {
                        if (DBROWS(dbproc) && (dbnumcols(dbproc) == 5))
                        {
                            while (dbnextrow(dbproc) != NO_MORE_ROWS)
                            {
                                if(pData=dbdata(dbproc, 1))
                                    UtilStrCpy(pnod->Ol[i].ol_i_name,pData,dbdatlen(dbproc, 1));
                                if(pData=dbdata(dbproc, 2))
                                    pnod->Ol[i].ol_stock = (*(DBSMALLINT *) pData);
                                if(pData=dbdata(dbproc, 3))
                                    UtilStrCpy(pnod->Ol[i].ol_brand_generic,pData,dbdatlen(dbproc, 3));
                                if(pData=dbdata(dbproc, 4))
                                    dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
                                        SQLFLTNT,(CHAR *) &pnod->Ol[i].ol_i_price,8);
                                if(pData=dbdata(dbproc, 5))
                                    dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
                                        SQLFLTNT,(CHAR *) &pnod->Ol[i].ol_amount,8);
                                pnod->total_amount = pnod->total_amount + pnod->Ol[i].ol_amount;
                            }; // while (dbnextrow)
                        }; // if (DBROWS && dbnumcols)

```

```

    }; // if (dbresults)
}; // for (o_ol_cnt)
while ((rc = dbresults(dbproc)) != NO_MORE_RESULTS) &&
      (rc != FAIL)
{
    if (DBROWS(dbproc) && (dbnumcols(dbproc) == 8))
    {
        while ((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) &&
              (rc != FAIL)
        {
            if (pData=dbdata(dbproc, 1))
                dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
                          SQLFLT8,(CHAR *) &pnod->w_tax,8);
            if (pData=dbdata(dbproc, 2))
                dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
                          SQLFLT8,(CHAR *) &pnod->d_tax,8);
            if (pData=dbdata(dbproc, 3))
                pnod->o_id = *(DBINT *) pData);
            if (pData=dbdata(dbproc, 4))
                UtilStrCpy(pnod->c_last,pData,dbdatlen(dbproc,4));
            if (pData=dbdata(dbproc, 5))
                dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
                          SQLFLT8,(CHAR *) &pnod->c_discount,8);
            if (pData=dbdata(dbproc, 6))
                UtilStrCpy(pnod-
>c_credit,pData,dbdatlen(dbproc,6));
            if (pData=dbdata(dbproc, 7))
            {
                datetime = *(DBDATETIME *) pData);
                dbdatecrack(dbproc,&pnod->o_entry_d,&datetime);
            };
            if (pData=dbdata(dbproc, 8))
                commit_flag = *(DBTINYINT *) pData);
        }; // while (dbnextrow)
    }; // if (DBROWS && dbnumcols)
}; // while (dbresults)
}; // if (dbrpcexec)
}; // if (dbrpcinit)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("NewOrder Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{
    if (commit_flag == 1)
    {
        pnod->total_amount = pnod->total_amount *
            ((1 + pnod->w_tax + pnod->d_tax) * (1 - pnod->c_discount));
        strcpy(pnod->execution_status,"Transaction committed.");
        return(SVC_NOERROR);
    }
    else
    {
        strcpy(pnod->execution_status,"Item number is not valid.");
        return(SVC_BADITEMID);
    };
}; // !bDeadlock

```

```

}; // for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(pnod->execution_status,"Hit deadlock max.");
userlog("NewOrder Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);

}; // SQLNewOrder

//=====
// FUNCTION: SQLPayment
//
// Handles the payment transaction.
//
// ARGUMENTS:
// PAYMENT_DATA Payment input/output data structure
// dbdata (global)
// bDeadlock (global)
//
// RETURNS:
// SVC_NOERROR success
// !SVC_NOERROR failure
//
// COMMENTS: None
//
//=====
int SQLPayment(PAYMENT_DATA *ppd)
{
    RETCODE rc;
    int tryit;
    short num_deadlocks = 0;
    DBDATETIME datetime;
    BYTE * pData;

    bFailed = FALSE;
    bDeadlock = FALSE;

    for (tryit=0; tryit < DeadlockRetry; tryit++)
    {
        if (dbrpcinit(dbproc,"tpcc_payment",0) == SUCCEED)
        {
            dbrpcparam(dbproc,NULL,0,SQLINT2,-1,-1,(BYTE *) &ppd->w_id);
            dbrpcparam(dbproc,NULL,0,SQLINT2,-1,-1,(BYTE *) &ppd->c_w_id);
            dbrpcparam(dbproc,NULL,0,SQLFLT8,-1,-1,(BYTE *) &ppd->h_amount);
            dbrpcparam(dbproc,NULL,0,SQLINT1,-1,-1,(BYTE *) &ppd->d_id);
            dbrpcparam(dbproc,NULL,0,SQLINT1,-1,-1,(BYTE *) &ppd->c_d_id);
            dbrpcparam(dbproc,NULL,0,SQLINT4,-1,-1,(BYTE *) &ppd->c_id);
            if (ppd->c_id == 0)
            {
                dbrpcparam(dbproc,NULL,0,SQLCHAR,-1,strlen(ppd->c_last),ppd-
>c_last);
            };
            if (dbrpcexec(dbproc) == SUCCEED)
            {
                while ((rc = dbresults(dbproc)) != NO_MORE_RESULTS) && (rc !=
FAIL))
                {
                    if (DBROWS(dbproc) && (dbnumcols(dbproc) == 27))
                    {

```

```

FAIL))
while ((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) && (rc !=
{
    if(pData=dbdata(dbproc,1))
        ppd->c_id = *((DBINT *) pData);
    if(pData=dbdata(dbproc,2))
        UtilStrCpy(ppd->c_last,pData,dbdatlen(dbproc,2));
    if(pData=dbdata(dbproc,3))
    {
        datetime = *((DBDATETIME *) pData);
        dbdatecrack(dbproc,&ppd->h_date,&datetime);
    };
    if(pData=dbdata(dbproc,4))
        UtilStrCpy(ppd->w_street_1,pData,dbdatlen(dbproc,4));
    if(pData=dbdata(dbproc,5))
        UtilStrCpy(ppd->w_street_2,pData,dbdatlen(dbproc,5));
    if(pData=dbdata(dbproc,6))
        UtilStrCpy(ppd->w_city,pData,dbdatlen(dbproc,6));
    if(pData=dbdata(dbproc,7))
        UtilStrCpy(ppd->w_state,pData,dbdatlen(dbproc,7));
    if(pData=dbdata(dbproc,8))
        UtilStrCpy(ppd->w_zip,pData,dbdatlen(dbproc,8));
    if(pData=dbdata(dbproc,9))
        UtilStrCpy(ppd->d_street_1,pData,dbdatlen(dbproc,9));
    if(pData=dbdata(dbproc,10))
        UtilStrCpy(ppd-
>d_street_2,pData,dbdatlen(dbproc,10));
    if(pData=dbdata(dbproc,11))
        UtilStrCpy(ppd->d_city,pData,dbdatlen(dbproc,11));
    if(pData=dbdata(dbproc,12))
        UtilStrCpy(ppd->d_state,pData,dbdatlen(dbproc,12));
    if(pData=dbdata(dbproc,13))
        UtilStrCpy(ppd->d_zip,pData,dbdatlen(dbproc,13));
    if(pData=dbdata(dbproc,14))
        UtilStrCpy(ppd->c_first,pData,dbdatlen(dbproc,14));
    if(pData=dbdata(dbproc,15))
        UtilStrCpy(ppd->c_middle,pData,dbdatlen(dbproc,15));
    if(pData=dbdata(dbproc,16))
        UtilStrCpy(ppd-
>c_street_1,pData,dbdatlen(dbproc,16));
    if(pData=dbdata(dbproc,17))
        UtilStrCpy(ppd-
>c_street_2,pData,dbdatlen(dbproc,17));
    if(pData=dbdata(dbproc,18))
        UtilStrCpy(ppd->c_city,pData,dbdatlen(dbproc,18));
    if(pData=dbdata(dbproc,19))
        UtilStrCpy(ppd->c_state,pData,dbdatlen(dbproc,19));
    if(pData=dbdata(dbproc,20))
        UtilStrCpy(ppd->c_zip,pData,dbdatlen(dbproc,20));
    if(pData=dbdata(dbproc,21))
        UtilStrCpy(ppd->c_phone,pData,dbdatlen(dbproc,21));
    if(pData=dbdata(dbproc,22))
    {
        datetime = *((DBDATETIME *) pData);
        dbdatecrack(dbproc,&ppd->c_since, &datetime);
    };
    if(pData=dbdata(dbproc,23))
        UtilStrCpy(ppd->c_credit,pData,dbdatlen(dbproc,23));
    if(pData=dbdata(dbproc,24))
        dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
        SQLFLTN,(CHAR *) &ppd->c_credit_lim,8);
    if(pData=dbdata(dbproc,25))
        dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
        SQLFLTN,(CHAR *) &ppd->c_discount,8);
    if(pData=dbdata(dbproc,26))
        dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
        SQLFLTN,(CHAR *) &ppd->c_balance,8);
    if(pData=dbdata(dbproc,27))
        UtilStrCpy(ppd->c_data,pData,dbdatlen(dbproc,27));
    }; // while (dbnextrow)
}; // if (DBROWS && dbnumcols)
}; // while (dbresults)
}; // if (dbrcpxe)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("Payment Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{
    if (ppd->c_id == 0)
    {
        strcpy(ppd->execution_status,"Invalid Customer id,name.");
        return(SVCERR_NOCUSTOMER);
    }
    else
        strcpy(ppd->execution_status,"Transaction committed.");
    return(SVC_NOERROR);
}; // !bDeadlock
}; // for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(ppd->execution_status,"Hit deadlock max.");
userlog("Payment Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);
}; // SQLPayment

//=====
// FUNCTION: SQLOrderStatus
//
// Handles the Order Status transaction.
//
// ARGUMENTS:
// ORDER_STATUS_DATA      Payment input/output data structure
// dbdata (global)
// bDeadlock (global)
//
// RETURNS:
// SVC_NOERROR success
// !SVC_NOERROR failure
//
// COMMENTS: None
//
//=====
int SQLOrderStatus(ORDER_STATUS_DATA * posd)
{
    RETCODE rc;

```

```

int tryit;
short num_deadlocks = 0;
int i;
DBDATETIME datetime;
BYTE * pData;

bFailed = FALSE;
bDeadlock = FALSE;

for (tryit=0; tryit < DeadlockRetry; tryit++)
{
    if (dbrpcinit(dbproc,"tpcc_orderstatus", 0) == SUCCEED)
    {
        dbrpcparam(dbproc,NULL,0,SQLINT2,-1,-1,(BYTE *) &posd->w_id);
        dbrpcparam(dbproc,NULL,0,SQLINT1,-1,-1,(BYTE *) &posd->d_id);
        dbrpcparam(dbproc,NULL,0,SQLINT4,-1,-1,(BYTE *) &posd->c_id);
        if (posd->c_id == 0)
        {
            dbrpcparam(dbproc,NULL,0,SQLCHAR,-1,strlen(posd->c_last),posd-
>c_last);
        };
    };
    if (dbrpcexec(dbproc) == SUCCEED)
    {
        while ((rc = dbresults(dbproc)) != NO_MORE_RESULTS) && (rc !=
FAIL))
        {
            if (DBROWS(dbproc) && (dbnumcols(dbproc) == 5))
            {
                i = 0;
                while ((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) && (rc !=
FAIL))
                {
                    if (pData=dbdata(dbproc,1))
                        posd->OlOrderStatusData[i].ol_supply_w_id =
(* (DBSMALLINT *) pData);
                    if (pData=dbdata(dbproc,2))
                        posd->OlOrderStatusData[i].ol_i_id = (* (DBINT *)
pData);
                    if (pData=dbdata(dbproc,3))
                        posd->OlOrderStatusData[i].ol_quantity =
(* (DBSMALLINT *) pData);
                    if (pData=dbdata(dbproc,4))
                        dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
SQLFLTN,(CHAR *) &posd-
>OlOrderStatusData[i].ol_amount,8);
                    if (pData=dbdata(dbproc,5))
                    {
                        datetime = *((DBDATETIME *) pData);
                        dbdatecrack(dbproc,&posd-
>OlOrderStatusData[i].ol_delivery_d,&datetime);
                    };
                    i++;
                }; // while (dbnextrow)
                posd->o_ol_cnt = i;
            } // if (DBROWS && dbnumcols == 5)
            else
                if (DBROWS(dbproc) && (dbnumcols(dbproc) == 8))
                {

```

```

while ((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) && (rc !=
FAIL))
    {
        if (pData=dbdata(dbproc,1))
            posd->c_id = (* (DBINT *) pData);
        if (pData=dbdata(dbproc,2))
            UtilStrCpy(posd->c_last,pData,dbdatlen(dbproc,2));
        if (pData=dbdata(dbproc,3))
            UtilStrCpy(posd->c_first,pData,dbdatlen(dbproc,3));
        if (pData=dbdata(dbproc,4))
            UtilStrCpy(posd->c_middle,pData,dbdatlen(dbproc,4));
        if (pData=dbdata(dbproc,5))
        {
            datetime = *((DBDATETIME *) pData);
            dbdatecrack(dbproc,&posd->o_entry_d,&datetime);
        };
        if (pData=dbdata(dbproc,6))
            posd->o_carrier_id = (*(DBSMALLINT *) pData);
        if (pData=dbdata(dbproc,7))
            dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
SQLFLTN,(CHAR *) &posd->c_balance,8);
        if (pData=dbdata(dbproc,8))
            posd->o_id = (* (DBINT *) pData);
    }; // while (dbnextrow)
}; // if (DBROWS && dbnumcols == 8)
if (i==0)
    return(SVCERR_NOORDERS); // "No orders found for customer"
}; // while (dbresults)
}; // if (dbrpcexec)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("OrderStatus Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{
    if (posd->c_id == 0 && posd->c_last[0] == 0)
    {
        strcpy(posd->execution_status,"Invalid Customer id,name.");
        return(SVCERR_NOCUSTOMER);
    }
    else
        strcpy(posd->execution_status,"Transaction committed.");
    return(SVC_NOERROR);
}; // !bDeadlock
}; // for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(posd->execution_status,"Hit deadlock max.");
userlog("OrderStatus Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);
}; // SQLOrderStatus
//=====
// FUNCTION: UtilStrCpy
//
// Copies n characters from string pSrc to pDst and places a null

```



```

// null character at the end of the destination string. Unlike
// strncpy this function ensures that the result string is always
// null terminated.
//
//=====
void UtilStrCpy(char * pDest, char * pSrc, int n)
{
    strncpy(pDest, pSrc, n);
    pDest[n] = '\0';
    return;
}; // UtilStrCpy

//=====
//
// Function name: GetArgs
//
//=====
VOID GetArgs(INT argc, CHAR **argv)
{
    INT j;
    CHAR * ptr;
    BOOL bRslt = TRUE;

    for (j = 1; j < argc; ++j)
    {
        ptr = argv[j];
        switch (ptr[1])
        {
            case 's':
            case 'S':
                strcpy(szServer, ptr+2);
                break;

            case 'd':
            case 'D':
                strcpy(szDatabase, ptr+2);
                break;

        }; // switch(ptr[1])
    }; // for (j = 1; j < argc; ++j)
}; // GetArgs

```

### tpccdelv.c

```

// tpccdelv.c // tpccdelv.c
//
// Copyright Unisys, 1997
// Copyright Microsoft, 1996

#include <windows.h>
#include <malloc.h>
#include <stdarg.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>

#include <atmi.h>

```

```

#include <userlog.h>
#include "tpccsvr.h"

int iServerNo = 0;
char szServer[32] = "tpccdelv";
char szUser[32] = { 0 };
char szPassword[32] = { 0 };
char szDatabase[32] = "tpcc";
char szService[16] = "tpccdelv";
char szWork[200];

PDBPROCESS dbproc;
int spid; // spid assigned from dblib
BOOL bFailed;
BOOL bDeadlock;
short DeadlockRetry = (short)10;

FILE *fpLog;
char szLogTitle[32];
BOOL bFlush = FALSE; // flush after every write

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
                char *dberrstr, char *oserrstr);
int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate,
                int severity, char *msgtext);
void WriteLog(DELIVERY_DATA * pdd);
BOOL OpenLogFile(void);
void CalculateElapsed(int * pElapsed, LPSYSTEMTIME lpBegin,
                     LPSYSTEMTIME lpEnd);
void UtilStrCpy(char * pDest, char * pSrc, int n);
void GetArgs(INT argc, CHAR **argv);

//=====
//
// Function name: tpsvrinit
//
//=====
tpsvrinit(int argc, char *argv[])
{
    GetArgs(argc, argv);
    iServerNo = _getpid();
    sprintf(szWork, "%s%d Started, DBServer=%s, DB=%s",
            szService, iServerNo, szServer, szDatabase);
    userlog(szWork);
    if (OpenLogFile())
        return(-1);
    if (SQLInit(szServer, szDatabase, szUser, szPassword))
        return(-1);
    userlog("Database open, initialization complete");
    return(0);
}; // tpsvrinit

//=====
//
// Function name: tpsvrdone
//
//=====
void tpsvrdone()
{

```

```

userlog("Shutdown request for tpccdelv server");
if ( fpLog )
    fclose(fpLog);
dbclose(dbproc);
dbexit();
}; // tpsvrdone

//=====
//
// Function name: DELIVERY
//
// Entry point called by tuxedo for DELIVERY service requests.
//
//=====
void DELIVERY(TPSVCINFO * svcinfo)
{
    int iRslt;
    DELIVERY_DATA * pdd;

    pdd = (DELIVERY_DATA *) svcinfo->data;
    iRslt = SQLDelivery(pdd);
    WriteLog(pdd);

    // Check for DBLib termination error
    if (bFailed)
    {
        strcpy(pdd->execution_status,szWork);
        userlog(szWork);
        tpreturn(TPFAIL,SVCERR_DBLIB,svcinfo->data,svcinfo->len,0);
    }
    else
    if (iRslt == 0)
        tpreturn(TPSUCCESS,0,svcinfo->data,svcinfo->len,0);
    else
        tpreturn(TPFAIL,iRslt,svcinfo->data,svcinfo->len,0);
}; // DELIVERY

//=====
//
// Function name: SQLInit
//
// Set global dbproc and spid.
//
// Result:
// FALSE - database open, dbproc valid
// TRUE - database open failed
//
//=====
BOOL SQLInit(CHAR * pSvr,CHAR * pDB,CHAR * pUsr,CHAR * pPW,CHAR * pSvc)
{
    char szApp[32];
    char server[256];
    char database[256];
    char user[256];
    char password[256];
    LOGINREC *login;

    dbinit();
    // install error and message handlers

```

```

dbmsghandle((DBMSGHANDLE_PROC)msg_handler);
dberrhandle((DBERRHANDLE_PROC)err_handler);

dbproc = NULL;
strcpy(server,pSvr);
strcpy(database,pDB);
strcpy(user,pUsr);
strcpy(password,pPW);
sprintf(szApp,"%s%d",pSvc,_getpid());

login = dblogin();
if (!*user)
    DBSETLUSER(login,"sa");
else
    DBSETLUSER(login,user);
DBSETLPWD(login,password);
DBSETLHOST(login,szApp);
DBSETLVERSION(login,DBVER60);
// DBSETLPACKET(login,(unsigned short)DEFCLPACKSIZE);

if ((dbproc = dbopen(login,server)) == NULL)
{
    userlog("dbopen failed");
    return TRUE;
};
// Use the the right database
dbuse(dbproc,database);
dbcmd(dbproc,"select @@spid");
dbsqlxec(dbproc);
while (dbresults(dbproc) != NO_MORE_RESULTS)
{
    dbbind(dbproc,1,SMALLBIND,(DBINT) 0,(BYTE *) spid);
    while (dbnextrow(dbproc) != NO_MORE_ROWS)
        ;
};

dbcmd(dbproc,"set nocount on");
dbsqlxec(dbproc);
while (dbresults(dbproc) != NO_MORE_RESULTS)
{
    while (dbnextrow(dbproc) != NO_MORE_ROWS)
        ;
};

//rollback transaction on abort
dbcmd(dbproc,"set XACT_ABORT ON");
dbsqlxec(dbproc);
while (dbresults(dbproc) != NO_MORE_RESULTS)
{
    while (dbnextrow(dbproc) != NO_MORE_ROWS)
        ;
};

return(FALSE);
}; // SQLInit

//=====
// FUNCTION: err_handler
//

```

```

// Handles DB-Library errors
//
// ARGUMENTS:
// DBPROCESS *dbproc DBPROCESS id pointer
// int severity severity of error
// int dberr error id
// int oserr operating system specific error code
// char *dberrstr printable error description of dberr
// char *oserrstr printable error description of oserr
//
// RETURNS:
// int INT_CANCEL
//
// COMMENTS: None
//
//=====
int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
char *dberrstr, char *oserrstr)
{
    if ((dbproc == NULL) || (DBDEAD(dbproc)))
    {
        userlog("ErrHandler: DBPROC is invalid");
        return INT_CANCEL;
    };
    if (bFailed)
        return INT_CANCEL;
    if (oserr != DBNOERR)
    {
        sprintf(szWork, "ErrHandler: OSErr(%ld) - %s", oserr, oserrstr);
        userlog(szWork);
        bFailed = TRUE;
    };

    return INT_CANCEL;
}; // err_handler

//=====
// FUNCTION: msg_handler
//
// Handles DB-Library SQL Server error messages
//
// ARGUMENTS:
// DBPROCESS *dbproc DBPROCESS id pointer
// DBINT msgno message number
// int msgstate message state
// int severity message severity
// char *msgtext printable message description
//
// RETURNS: int INT_CONTINUE continue operation
// INT_CANCEL cancel operation
//
// COMMENTS: This function also sets the dead lock dbproc
// variable if necessary.
//
//=====
int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity, char *msgtext)
{

```

```

    if ((msgno == 5701) || (msgno == 2528) ||
        (msgno == 5703) || (msgno == 6006))
        return INT_CONTINUE;

    // deadlock message
    if (msgno == 1205)
    {
        // set the deadlock indicator
        bDeadlock = TRUE;
        return INT_CONTINUE;
    };

    if (bFailed)
        return INT_CANCEL;

    if (msgno == 0)
        return INT_CONTINUE;
    else
    {
        sprintf(szWork, "MsgHandler: MsgNo(%ld) - %s", msgno, msgtext);
        userlog(szWork);
        bFailed = TRUE;
    };

    return INT_CANCEL;
}; // msg_handler

//=====
// FUNCTION: SQLDelivery
//
// ARGUMENTS:
// pdd delivery transaction structure
// dbdata (global)
// bDeadlock (global)
//
// RETURNS:
// SVC_NOERROR success
// !SVC_NOERROR failure
//
// COMMENTS: None
//
//=====
int SQLDelivery(DELIVERY_DATA * pdd)
{
    RETCODE rc;
    int i;
    short num_deadlocks = 0;
    int tryit;
    DBDATETIME datetime;
    BYTE * pData;

    bFailed = FALSE;
    bDeadlock = FALSE;
    pdd->iComplete = 0;

    for (tryit=0; tryit < DeadlockRetry; tryit++)
    {
        if (dbrpcinit(dbproc, "tpcc_delivery", 0) == SUCCEED)
        {

```

```

    dbrpcparam(dbproc,NULL,0,SQLINT2,-1,-1,(BYTE *) &pdd->w_id);
    dbrpcparam(dbproc,NULL,0,SQLINT1,-1,-1,(BYTE *) &pdd-
>o_carrier_id);

    if (dbrpcexec(dbproc) == SUCCEEDED)
    {
        while ((rc = dbresults(dbproc)) != NO_MORE_RESULTS) && (rc !=
FAIL))
        {
            while ((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) && (rc !=
FAIL))
            {
                for (i = 0; i < 10; i++)
                {
                    if(pData = dbdata(dbproc,i + 1))
                        pdd->o_id[i] = *((DBINT *)pData);
                    else
                        pdd->o_id[i] = 0;
                };
            }; // while (dbnextrow)
        }; // while (dbresults)
    }; // if (dbrpcexec)
}; // if (dbrpcinit)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("Delivery Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{
    GetLocalTime(&pdd->EndTime);
    pdd->iComplete = 1;
    strcpy(pdd->execution_status,"Transaction committed.");
    return(SVC_NOERROR);
};
}; // for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(pdd->execution_status,"Hit deadlock max.");
userlog("Delivery Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);

}; // SQLDelivery

//=====
// FUNCTION: WriteLog
//
// Writes the delivery results to a log file.
//
// ARGUMENTS:
// pDelivery delivery information.
//
// RETURNS:
//
// COMMENTS:
// Record format:
// QTime,EndTime,Elapsed,w_id,o_carrier_id,o_id1, ... o_id10
//

```

```

//=====
void WriteLog(DELIVERY_DATA * pdd)
{
    int elapsed = 9999999;
    if (pdd->iComplete)
        CalculateElapsed(&elapsed,&pdd->QTime,&pdd->EndTime);
    fprintf(fpLog,
"%2.2d/%2.2d/%2.2d,%2.2d:%2.2d:%2.2d:%3.3d,%2.2d:%2.2d:%2.2d:%3.3d,"
"%d,%d,%d,%d,%d,%d,%d,%d,%d,%d,%d,%d\r\n",
pdd->EndTime.wYear - 1900,pdd->EndTime.wMonth,pdd->EndTime.wDay,
pdd->QTime.wHour,pdd->QTime.wMinute,
pdd->QTime.wSecond,pdd->QTime.wMilliseconds,
pdd->EndTime.wHour,pdd->EndTime.wMinute,
pdd->EndTime.wSecond,pdd->EndTime.wMilliseconds,
elapsed,pdd->w_id,pdd->o_carrier_id,
pdd->o_id[0],pdd->o_id[1],pdd->o_id[2],pdd->o_id[3],pdd->o_id[4],
pdd->o_id[5],pdd->o_id[6],pdd->o_id[7],pdd->o_id[8],pdd->o_id[9] );
    if (bFlush)
        fflush(fpLog);
}; // WriteLog

//=====
// FUNCTION: OpenLogFile
//
// Opens the delivery log file.
//
// ARGUMENTS:
// None.
//
// RETURNS:
// FALSE Log file successfully opened
// TRUE Failed to open log file
//
// COMMENTS:
//
//=====
BOOL OpenLogFile(void)
{
    sprintf(szLogTitle,"%s%d",LOGFILE_NAME,iServerNo);
    fpLog = fopen(szLogTitle,"ab");
    if (!fpLog)
    {
        sprintf(szWork,"LogFile %s Open Failed (%d)",
szLogTitle,GetLastError());
        userlog(szWork);
        return(TRUE);
    };
    return(FALSE);
}; // OpenLogFile

//=====
// FUNCTION: CalculateElapsed
//
// Calculates the elapsed time of the delivery transaction.
//
// ARGUMENTS:
// lpBegin time delivery was queued
// lpEnd time delivery update completed
//
// RETURNS:

```

```

//      int          pElapsed elapsed time result (in milliseconds)
//
// COMMENTS:
//      None
//
//=====
void CalculateElapsed(int * pElapsed,LPSYSTEMTIME lpBegin,
                    LPSYSTEMTIME lpEnd)
{
    int tmBegin;
    int tmEnd;

    tmBegin = (lpBegin->wHour * 3600000) + (lpBegin->wMinute * 60000) +
              (lpBegin->wSecond * 1000) + lpBegin->wMilliseconds;
    tmEnd = (lpEnd->wHour * 3600000) + (lpEnd->wMinute * 60000) +
           (lpEnd->wSecond * 1000) + lpEnd->wMilliseconds;
    *pElapsed = tmEnd - tmBegin;

    // Check for day boundry, this will function for 24 hour period but
    // will fail over a 48 hours period.
    if (*pElapsed < 0)
        *pElapsed = *pElapsed + (24 * 60 * 60 * 1000);
    return;
}; // CalculateElapsed

//=====
// FUNCTION: UtilStrCpy
//
//      Copies n characters from string pSrc to pDst and places a null
//      null character at the end of the destination string.
//
// ARGUMENTS:
//      char *pDest destination string pointer
//      char *pSrc source string pointer
//      int n number of characters to copy
//
// RETURNS:      None
//
// COMMENTS:
//      Unlike strncpy this function ensures that the result string is
//      always null terminated.
//
//=====
void UtilStrCpy(char * pDest, char * pSrc, int n)
{
    strncpy(pDest, pSrc, n);
    pDest[n] = '\0';
    return;
}; // UtilStrCpy

//=====
//
// Function name: GetArgs
//
//=====
void GetArgs(INT argc, CHAR **argv)
{
    INT j;
    CHAR * ptr;
    BOOL bRslt = TRUE;

```

```

for (j = 1; j < argc; ++j)
{
    ptr = argv[j];
    switch (ptr[1])
    {
        case 's':
        case 'S':
            strcpy(szServer,ptr+2);
            break;

        case 'd':
        case 'D':
            strcpy(szDatabase,ptr+2);
            break;

        case 'F':
        case 'f':
            bFlush = TRUE; //turn on delilog flush when written.
            break;

    }; // switch(ptr[1])
}; // for (j = 1; j < argc; ++j)
}; // GetArgs

```

## DELIVERY REPORT MAKEFILE

```

# Microsoft Developer Studio Generated NMAKE File, Format Version 4.20
# ** DO NOT EDIT **

# TARGETTYPE "Win32 (x86) Console Application" 0x0103

!IF "$(CFG)" == ""
CFG=delirpt - Win32 Debug
!MESSAGE No configuration specified. Defaulting to delirpt - Win32 Debug.
!ENDIF

!IF "$(CFG)" != "delirpt - Win32 Release" && "$(CFG)" !=\
"delirpt - Win32 Debug"
!MESSAGE Invalid configuration "$(CFG)" specified.
!MESSAGE You can specify a configuration when running NMAKE on this
makefile
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "delirpt.mak" CFG="delirpt - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "delirpt - Win32 Release" (based on "Win32 (x86) Console
Application")
!MESSAGE "delirpt - Win32 Debug" (based on "Win32 (x86) Console
Application")
!MESSAGE
!ERROR An invalid configuration is specified.
!ENDIF

!IF "$(OS)" == "Windows_NT"
NULL=

```

```

!ELSE
NULL=nul
!ENDIF
#####
#####
# Begin Project
CPP=cl.exe
RSC=rc.exe

!IF "$(CFG)" == "delirpt - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "delirpt_"
# PROP BASE Intermediate_Dir "delirpt_"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir "delirpt_"
# PROP Intermediate_Dir "delirpt_"
# PROP Target_Dir ""
OUTDIR=.\delirpt_
INTDIR=.\delirpt_

ALL : "$(OUTDIR)\delirpt.exe"

CLEAN :
    -@erase "$(INTDIR)\DELIRPT.OBJ"
    -@erase "$(OUTDIR)\delirpt.exe"

"$(OUTDIR)" :
    if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR)"

# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_CONSOLE"
/YX /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_CONSOLE" /YX /c
CPP_PROJ=/nologo /ML /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_CONSOLE" \
/Fp"$(INTDIR)/delirpt.pch" /YX /Fo"$(INTDIR)/" /c
CPP_OBJS=.\delirpt_ /
CPP_SBRS=.\.
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$(OUTDIR)/delirpt.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbccp32.lib /nologo /subsystem:console /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbccp32.lib /nologo /subsystem:console /incremental:no\
/pdb:"$(OUTDIR)/delirpt.pdb" /machine:I386 /out:"$(OUTDIR)/delirpt.exe"
LINK32_OBJS= \

```

```

"$(INTDIR)\DELIRPT.OBJ"

"$(OUTDIR)\delirpt.exe" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
$(LINK32) @<<
$(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ELSEIF "$(CFG)" == "delirpt - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir "Debug"
# PROP Intermediate_Dir "Debug"
# PROP Target_Dir ""
OUTDIR=.\Debug
INTDIR=.\Debug

ALL : "$(OUTDIR)\delirpt.exe"

CLEAN :
    -@erase "$(INTDIR)\DELIRPT.OBJ"
    -@erase "$(INTDIR)\vc40.idb"
    -@erase "$(INTDIR)\vc40.pdb"
    -@erase "$(OUTDIR)\delirpt.exe"
    -@erase "$(OUTDIR)\delirpt.ilc"
    -@erase "$(OUTDIR)\delirpt.pdb"

"$(OUTDIR)" :
    if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR)"

# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
" _CONSOLE" /YX /c
# ADD CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_CONSOLE"
/YX /c
CPP_PROJ=/nologo /MLd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
" _CONSOLE" \
/Fp"$(INTDIR)/delirpt.pch" /YX /Fo"$(INTDIR)/" /Fd"$(INTDIR)/" /c
CPP_OBJS=.\Debug/
CPP_SBRS=.\.
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$(OUTDIR)/delirpt.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbccp32.lib /nologo /subsystem:console /debug /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbccp32.lib /nologo /subsystem:console /debug /machine:I386
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib\

```

```

advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib\
odbccp32.lib /nologo /subsystem:console /incremental:yes\
/pdb:"$(OUTDIR)/delirpt.pdb" /debug /machine:I386
/out:"$(OUTDIR)/delirpt.exe"
LINK32_OBJS= \
    "$(INTDIR)\DELIRPT.OBJ"

"$ (OUTDIR)\delirpt.exe" : "$ (OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ENDIF

.c{$ (CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cpp{$ (CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cxx{$ (CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.c{$ (CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cpp{$ (CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cxx{$ (CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

#####
#####
# Begin Target

# Name "delirpt - Win32 Release"
# Name "delirpt - Win32 Debug"

!IF "$(CFG)" == "delirpt - Win32 Release"

!ELSEIF "$(CFG)" == "delirpt - Win32 Debug"

!ENDIF

#####
#####
# Begin Source File

SOURCE=.\DELIRPT.C

"$ (INTDIR)\DELIRPT.OBJ" : $(SOURCE) "$(INTDIR)"

# End Source File
# End Target
# End Project
#####
#####

```

## delirpt.c

```

/*      FILE:          DELIRPT.C
*
*      Microsoft TPC-C Kit Ver. 3.00.000
*
*      Copyright Microsoft, 1996
*
*      PURPOSE:       Delivery report processing application
*      Author:        Philip Durr
*                    philipdu@Microsoft.com
*/

#include <windows.h>
#include <stdio.h>
#include <stdlib.h>

#define LOGFILE_READ_EOF      0
                                //check log file flag return current state
#define LOGFILE_CLEAR_EOF    1
                                //clear end of log file flag
#define LOGFILE_SET_EOF      2
                                //set flag end of log file reached

#define INTERVAL              .01
                                //90th percentile calculation bucket

interval

#define ERR_SUCCESS          1000
                                //success no error
#define ERR_READING_LOGFILE  1001
                                //io errors occured reading delivery log file
#define ERR_INSUFFICIENT_MEMORY 1002
                                //insuficient memory to process 90th percentile report
#define ERR_CANNOT_OPEN_RESULTS_FILE 1005
                                //Cannot open delivery results file delilog.

typedef struct _RPTLINE
{
    SYSTEMTIME      start;
                                //delilog report line start time
    SYSTEMTIME      end;
                                //delilog report line end time
    int             response;
                                //delilog report line time delivery
    took in milliseconds
    int             w_id;
                                //delilog report line warehouse id
    for delivery
    int             o_carrier_id;
                                //delilog report line carier id for delivery
    int             items[10];
                                //delilog report line delivery line
    items
} RPTLINE, *PRPTLINE;

//error message structure used in ErrorMessage API
typedef struct _SERRORMSG
{
    int             iError;
                                //error id of message
    char            szMsg[80];
                                //message to sent to browser

```

```

} SERRORMSG;

int                versionMS = 4;
//delirpt version
int                versionMM = 0;
int                versionLS = 0;
int                iReport;
//delirpt report to process
int                iStartTime;
//begin times to accept for report
int                iEndTime;
//end times to accept for report
FILE               *fpLog;
//log file stream
CHAR szLogFileTitle[100];
#define DEFAULTTLOGTITLE "delilog."

//Local function prototypes
void               main(int argc, char *argv[]);
static int         Init(void);
static void        Restore(void);
static int         DoReport(void);
int               AverageResponse(void);
int               SkippedDelivery(void);
int               Percentile90th(void);
BOOL              CheckTimes(PRPTLINE pRptLine);
static int         OpenLogFile(void);
static void        CloseLogFile(void);
static void        ResetLogFile(void);
static BOOL        LogEOF(int iOperation);
static BOOL        ReadReportLine(char *szBuffer, PRPTLINE pRptLine);
static BOOL        ParseReportLine(char *szLine, PRPTLINE pRptLine);
static BOOL        ParseDate(char *szDate, LPSYSTEMTIME pTime);
static BOOL        ParseTime(char *szTime, LPSYSTEMTIME pTime);
static void        ErrorMessage(int iError);
static BOOL        GetParameters(int argc, char *argv[]);
static void        PrintParameters(void);
static void        PrintHeader(void);
static void        cls(void);
static BOOL        IsNumeric(char *ptr);

/* FUNCTION: int main(int argc, char *argv[])
 *
 * PURPOSE:   This function is the beginning execution point for the
delivery executable.
 *
 * ARGUMENTS: int         argc    number of command line arguments
passed to delivery
 *           char        *argv[] array of command line
argument pointers
 *
 * RETURNS:   None
 *
 * COMMENTS:  None
 */

void main(int argc, char *argv[])
{

```

```

int iError;

PrintHeader();

if ( GetParameters(argc, argv) )
{
    PrintParameters();
    return;
}

if ( (iError=Init()) != ERR_SUCCESS )
{
    ErrorMessage(iError);
    Restore();
    return;
}

if ( (iError = DoReport()) != ERR_SUCCESS )
    ErrorMessage(iError);

Restore();

return;
}

/* FUNCTION: static int Init(void)
 *
 * PURPOSE:   This function initializes the delirtp application.
 *
 * ARGUMENTS: None
 *
 * RETURNS:   None
 *
 * COMMENTS:  None
 */

static int Init(void)
{
    int iError;

    if ( (iError = OpenLogFile()) )
        return iError;
    return TRUE;
}

/* FUNCTION: static void Restore(void)
 *
 * PURPOSE:   This function cleans up the delirtp application before
termination.
 *
 * ARGUMENTS: None
 *
 * RETURNS:   None
 *
 * COMMENTS:  None
 */

static void Restore(void)

```



```

{
    CloseLogFile();
    return;
}

/* FUNCTION: static int DoReport(void)
 *
 * PURPOSE:          This function dispatches the requested report.
 *
 * ARGUMENTS:       None
 *
 * RETURNS:         ERR_SUCCESS if successfull or error code if an
error occurs.
 *
 * COMMENTS:       None
 */

static int DoReport(void)
{
    int iRc;

    switch(iReport)
    {
        case 1:
            iRc = AverageResponse();
            break;
        case 2:
            iRc = Percentile90th();
            break;
        case 3:
            iRc = SkippedDelivery();
            break;
        case 4:
            if ( (iRc = AverageResponse()) != ERR_SUCCESS )
                break;
            if ( (iRc = Percentile90th()) != ERR_SUCCESS )
                break;
            if ( (iRc = SkippedDelivery()) != ERR_SUCCESS )
                break;
            break;
    }
    return iRc;
}

/* FUNCTION: int AverageResponse(void)
 *
 * PURPOSE:          This function processes the AverageResponse report.
 *
 * ARGUMENTS:       None
 *
 * RETURNS:         ERR_SUCCESS if successfull or error code if an
error occurs.
 *
 * COMMENTS:       None
 */

int AverageResponse(void)
{

```

```

RPTLINE reportLine;
int          iTotalsResponse;
int          iLines;
double      fAverage;
char        szDelivery[128];

ResetLogFile();

iTotalsResponse = 0;
iLines = 0;
printf("\n\n***** Average Response Time Report *****\n");
while ( !LogEOF(LOGFILE_READ_EOF) )
{
    if ( ReadReportLine(szDelivery, &reportLine) )
        return ERR_READING_LOGFILE;
    if ( !LogEOF(LOGFILE_READ_EOF) )
    {
        if ( CheckTimes(&reportLine) )
            continue;
        iLines++;
        iTotalsResponse += reportLine.response;

        if ( iLines % 10 == 0 )
            printf("Reading Report Line:\t%d\r",
iLines);
    }
}
printf("                                \r");
if ( iLines == 0 )
{
    printf("No deliveries found.\n");
}
else
{
    fAverage = ((double)iTotalsResponse /
(double)iLines)/(double)1000;
    printf("Total Deliveries:          %10.0f\n", (float)iLines);
    printf("Total Response Times:    %10.3f\n",
((float)iTotalsResponse/(float)1000));
    printf("Average Response Time: %10.3f\n", fAverage);
}

return ERR_SUCCESS;
}

/* FUNCTION: int Percentile90th(void)
 *
 * PURPOSE:          This function processes the 90th percentile report.
 *
 * ARGUMENTS:       None
 *
 * RETURNS:         ERR_SUCCESS if successfull or error code if an
error occurs.
 *
 * COMMENTS:       This function requires enough space to allocate needed
buckets which will be 2 * max response time
in
 *
 *                  deci-seconds.
 */

```

```

int Percentile90th(void)
{
    RPTLINE reportLine;
    int      iBucketSize;
    int      i;
    int      iResponseSeconds;
    int      iMaxSeconds;
    int      iTotalBuckets;
    double   iTotal;
    double   i90thPercent;
    short    *psBuckets;
    char     szDelivery[128];

    printf("\n\n***** 90th Percentile *****\n");
    printf("Calculating Max Response Seconds...\n");

    ResetLogFile();

    iMaxSeconds = -1;
    while ( !LogEOF(LOGFILE_READ_EOF) )
    {
        if ( ReadReportLine(szDelivery, &reportLine) )
            return ERR_READING_LOGFILE;
        if ( szDelivery[0] == '*' )
            continue;
        if ( !LogEOF(LOGFILE_READ_EOF) )
        {
            if ( iMaxSeconds < reportLine.response )
                iMaxSeconds = reportLine.response;
        }
    }

    iTotalBuckets = iMaxSeconds + 1;

    printf("Allocating Buckets...\n");

    iBucketSize = iTotalBuckets * sizeof(short);

    if ( !(psBuckets = (short *)malloc(iBucketSize)) )
        return ERR_INSUFFICIENT_MEMORY;

    ZeroMemory(psBuckets, iBucketSize);

    iTotal = 0;

    ResetLogFile();
    printf("Calculating Distribution...\n");

    iMaxSeconds = -1;
    while ( !LogEOF(LOGFILE_READ_EOF) )
    {
        if ( ReadReportLine(szDelivery, &reportLine) )
            return ERR_READING_LOGFILE;
        if ( szDelivery[0] == '*' )
            continue;
        if ( !LogEOF(LOGFILE_READ_EOF) )
        {
            if ( CheckTimes(&reportLine) )
                continue;
        }
    }
}

```

```

        psBuckets[reportLine.response]++;
        iTotal++;
        if ( iMaxSeconds < reportLine.response )
            iMaxSeconds = reportLine.response;
    }

    printf("Max Response Time = %d.%d\n",
           (iMaxSeconds / 1000), (iMaxSeconds % 1000));

    i90thPercent = iTotal * .9;

    for(i=0, iTotal = 0.0; iTotal < i90thPercent; iTotal +=
(double)psBuckets[i] )
        i++;

    printf("90th Percentile = %d.%d\n", i/1000, (i % 1000));

    free(psBuckets);

    return ERR_SUCCESS;
}

/* FUNCTION: int SkippedDelivery(void)
 *
 * PURPOSE:          This function processes the Skipped Deliveries
report.
 *
 * ARGUMENTS:       None
 *
 * RETURNS:         ERR_SUCCESS if successfull or error code if an
error occurs.
 *
 * COMMENTS:       None
 */

int SkippedDelivery(void)
{
    RPTLINE reportLine;
    char     szDelivery[128];
    int      i;
    int      items[10];

    ResetLogFile();

    printf("\n\n***** Skipped Delivery Report *****\n");
    memset(items, 0, sizeof(items));
    printf("Reading Delivery Log File...");

    while ( !LogEOF(LOGFILE_READ_EOF) )
    {
        if ( ReadReportLine(szDelivery, &reportLine) )
            return ERR_READING_LOGFILE;
        if ( !LogEOF(LOGFILE_READ_EOF) )
        {
            if ( CheckTimes(&reportLine) )
                continue;
            for(i=0; i<10; i++)
            {

```

```

                if ( !reportLine.items[i] )
                    items[i]++;
            }
        }
    }
    printf("\n");
    printf("Skipped delivery table.\n");
    printf(" 1   2   3   4   5   6   7   8   9  10 \n");
    printf("-----\n");
    for(i=0; i<10; i++)
        printf("%4.4d ", items[i]);
    printf("\n");

    return ERR_SUCCESS;
}

/* FUNCTION: BOOL CheckTimes(PRPTLINE pRptLine)
 *
 * PURPOSE:      This function checks to see if the delilog record falls
withing the
 *
 *              begin and end time from the command line.
 *
 * ARGUMENTS:   PRPTLINE      pRptLine      delilog processed report
line.
 *
 * RETURNS:     BOOL         FALSE  if report line is not within the
 *
 *              start and end times.
 *
 *              TRUE   if the report line is
 *
 *              within the
 *
 *              start and end times.
 *
 * COMMENTS:    If startTime and endTime are both 0 then the user requested
 *
 *              the default behavior which is all records in
delilog are
 *
 *              valid.
 */

BOOL CheckTimes(PRPTLINE pRptLine)
{
    int      iRptEndTime;
    int      iRptStartTime;

    iRptStartTime = (pRptLine->start.wHour * 3600000) + (pRptLine->start.wMinute * 60000) + (pRptLine->start.wSecond * 1000) + pRptLine->start.wMilliseconds;
    iRptEndTime = (pRptLine->end.wHour * 3600000) + (pRptLine->end.wMinute * 60000) + (pRptLine->end.wSecond * 1000) + pRptLine->end.wMilliseconds;

    if ( iStartTime == 0 && iEndTime == 0 )
        return FALSE;

    if ( iStartTime <= iRptStartTime && iEndTime >= iRptEndTime )
        return FALSE;

    return TRUE;
}

```

```

/* FUNCTION: int OpenLogFile(void)
 *
 * PURPOSE:      This function opens the delivery log file for use.
 *
 * ARGUMENTS:    None
 *
 * RETURNS:      int      ERR_CANNOT_OPEN_RESULTS_FILE  Cannot create
results log file.
 *
 *              ERR_SUCCESS
 *
 *              Log file successfully opened
 *
 * COMMENTS:     None
 *
 */

static int OpenLogFile(void)
{
    fpLog = fopen(szLogFileTitle, "rb");

    if ( !fpLog )
        return ERR_CANNOT_OPEN_RESULTS_FILE;

    return ERR_SUCCESS;
}

/* FUNCTION: int CloseLogFile(void)
 *
 * PURPOSE:      This function closes the delivery log file.
 *
 * ARGUMENTS:    None
 *
 * RETURNS:      None
 *
 * COMMENTS:     None
 *
 */

static void CloseLogFile(void)
{
    if ( fpLog )
        fclose(fpLog);

    return;
}

/* FUNCTION: static void ResetLogFile(void)
 *
 * PURPOSE:      This function prepares the delilog. file for reading
 *
 * ARGUMENTS:    None
 *
 * RETURNS:      None
 *
 * COMMENTS:     None
 *
 */

```

```

static void ResetLogFile(void)
{
    fseek(fpLog, 0L, SEEK_SET);
    LogEOF(LOGFILE_CLEAR_EOF);

    return;
}

/* FUNCTION: static BOOL LogEOF(int iOperation)
 *
 * PURPOSE: This function tracks and reports the end of file condition
 *           on the delilog file.
 *
 * ARGUMENTS: int iOperation requested operation this can be:
 *
 * LOGFILE_READ_EOF      check log file flag return current state
 *
 * LOGFILE_CLEAR_EOF     clear end of log file flag
 *
 * LOGFILE_SET_EOF       set flag end of log file reached
 *
 * RETURNS:              None
 *
 * COMMENTS:            None
 */

static BOOL LogEOF(int iOperation)
{
    static BOOL bEOF;

    switch(iOperation)
    {
        case LOGFILE_READ_EOF:
            return bEOF;
            break;
        case LOGFILE_CLEAR_EOF:
            bEOF = FALSE;
            break;
        case LOGFILE_SET_EOF:
            bEOF = TRUE;
            break;
    }
    return FALSE;
}

/* FUNCTION: static BOOL ReadReportLine(char *szBuffer, PRPTLINE pRptLine)
 *
 * PURPOSE: This function reads a text line from the delilog file.
 *           on the delilog file.
 *
 * ARGUMENTS: char *szBuffer buffer to placed read delilog
 * file line into.
 * PRPTLINE pRptLine returned
 * structure containing parsed delilog
 * report line.
 *
 * RETURNS: FALSE if successfull or TRUE if an error occurs.

```

```

 *
 * COMMENTS: None
 */

static BOOL ReadReportLine(char *szBuffer, PRPTLINE pRptLine)
{
    int i = 0;
    int ch;
    int iEof;

    while( i < 128 )
    {
        ch = fgetc(fpLog);
        if ( iEof = feof(fpLog) )
            break;
        if ( ch == '\r' )
        {
            if ( i )
                break;
            continue;
        }
        if ( ch == '\n' )
            continue;
        szBuffer[i++] = ch;
    }

    //delivery item format is to long cannot be a valid delivery item
    if ( i >= 128 )
        return TRUE;

    szBuffer[i] = 0;
    if ( iEof )
    {
        LogEOF(LOGFILE_SET_EOF);
        if ( i == 0 )
            return FALSE;
    }
    return ParseReportLine(szBuffer, pRptLine);
}

/* FUNCTION: static BOOL ParseReportLine(char *szLine, PRPTLINE pRptLine)
 *
 * PURPOSE: This function reads a text line from the delilog file.
 *           on the delilog file.
 *
 * ARGUMENTS: char *szLine buffer containing the delilog
 * file line to be parsed.
 * PRPTLINE pRptLine returned
 * structure containing parsed delilog
 * report line values.
 *
 * RETURNS: FALSE if successfull or TRUE if an error occurs.
 *
 * COMMENTS: None
 */

```

```

static BOOL ParseReportLine(char *szLine, PRPTLINE pRptLine)
{
    int i;

    if ( ParseDate(szLine, &pRptLine->start) )
        return TRUE;

    pRptLine->end.wYear = pRptLine->start.wYear;
    pRptLine->end.wMonth = pRptLine->start.wMonth;
    pRptLine->end.wDay = pRptLine->start.wDay;

    if ( !(szLine = strchr(szLine, ',')) )
        return TRUE;
    szLine++;

    if ( ParseTime(szLine, &pRptLine->start) )
        return TRUE;

    if ( !(szLine = strchr(szLine, ',')) )
        return TRUE;
    szLine++;

    if ( ParseTime(szLine, &pRptLine->end) )
        return TRUE;

    if ( !(szLine = strchr(szLine, ',')) )
        return TRUE;
    szLine++;

    if ( !IsNumeric(szLine) )
        return TRUE;
    pRptLine->response = atoi(szLine);

    if ( !(szLine = strchr(szLine, ',')) )
        return TRUE;
    szLine++;

    if ( !IsNumeric(szLine) )
        return TRUE;
    pRptLine->w_id = atoi(szLine);

    if ( !(szLine = strchr(szLine, ',')) )
        return TRUE;
    szLine++;

    if ( !IsNumeric(szLine) )
        return TRUE;
    pRptLine->o_carrier_id = atoi(szLine);

    if ( !(szLine = strchr(szLine, ',')) )
        return TRUE;
    szLine++;

    for(i=0; i<10; i++)
    {
        if ( !IsNumeric(szLine) )
            return TRUE;
        pRptLine->items[i] = atoi(szLine);

        if ( i<9 && !(szLine = strchr(szLine, ',')) )

```

```

        return TRUE;
        szLine++;
    }

    return FALSE;
}

/* FUNCTION: static BOOL ParseDate(char *szDate, LPSYSTEMTIME pTime)
 *
 * PURPOSE: This function validates and extracts a date string in the
 * format
 *          yy/mm/dd into an SYSTEMTIME structure.
 *
 * ARGUMENTS: char *szDate buffer containing the
 *             date to be parsed.
 *             LPSYSTEMTIME pTime system time
 *             structure where date will be placed.
 *
 * RETURNS: FALSE if successfull or TRUE if an error occurs.
 *
 * COMMENTS: None
 */

static BOOL ParseDate(char *szDate, LPSYSTEMTIME pTime)
{
    if ( !isdigit(*szDate) || !isdigit(*(szDate+1)) || *(szDate+2) !=
    '/' ||
        !isdigit(*(szDate+3)) || !isdigit(*(szDate+4)) ||
    *(szDate+5) != '/' ||
        !isdigit(*(szDate+6)) || !isdigit(*(szDate+7)) )
        return TRUE;

    pTime->wYear = atoi(szDate);

    pTime->wMonth = atoi(szDate+3);

    pTime->wDay = atoi(szDate+6);

    if ( pTime->wMonth > 12 || pTime->wMonth < 0 || pTime->wDay > 31
    || pTime->wDay < 0 )
        return TRUE;

    return FALSE;
}

/* FUNCTION: static BOOL ParseTime(char *szTime, LPSYSTEMTIME pTime)
 *
 * PURPOSE: This function validates and extracts a time string in the
 * format
 *          hh:mm:ss:mmm into an SYSTEMTIME structure.
 *
 * ARGUMENTS: char *szTime buffer containing the
 *             time to be parsed.
 *             LPSYSTEMTIME pTime system time
 *             structure where date will be placed.
 *
 * RETURNS: FALSE if successfull or TRUE if an error occurs.
 *
 * COMMENTS: None

```

```

*
*/
static BOOL ParseTime(char *szTime, LPSYSTEMTIME pTime)
{
    if ( !isdigit(*szTime) || !isdigit(*(szTime+1)) || *(szTime+2) !=
    ':' ||
        !isdigit(*(szTime+3)) || !isdigit(*(szTime+4)) ||
*(szTime+5) != ':' ||
        !isdigit(*(szTime+6)) || !isdigit(*(szTime+7)) ||
*(szTime+8) != ':' ||
        !isdigit(*(szTime+9)) || !isdigit(*(szTime+10)) ||
!isdigit(*(szTime+11)) )
        return TRUE;

    pTime->wHour = atoi(szTime);
    pTime->wMinute = atoi(szTime+3);
    pTime->wSecond = atoi(szTime+6);
    pTime->wMilliseconds = atoi(szTime+9);

    if ( pTime->wHour > 23 || pTime->wHour < 0 ||
        pTime->wMinute > 59 || pTime->wMinute < 0 ||
        pTime->wSecond > 59 || pTime->wSecond < 0 ||
        pTime->wMilliseconds < 0 )
        return TRUE;

    if ( pTime->wMilliseconds > 999 )
    {
        pTime->wSecond += (pTime->wMilliseconds/1000);
        pTime->wMilliseconds = pTime->wMilliseconds % 1000;
    }

    return FALSE;
}

/* FUNCTION: void ErrorMessage(int iError)
*
* PURPOSE: This function displays an error message in the delivery
executable's console window.
*
* ARGUMENTS: int iError error id to be displayed
*
* RETURNS: None
*
* COMMENTS: None
*
*/
static void ErrorMessage(int iError)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_SUCCESS,
        "Success, no error."
        },
        { ERR_CANNOT_OPEN_RESULTS_FILE,
        "Cannot open delivery results log file."
        },
    }
}

```

```

        {
            ERR_READING_LOGFILE,
            "Reading delivery log file, Delivery item format incorrect."
        },
        {
            ERR_INSUFFICIENT_MEMORY,
            "insufficient memory to process 90th percentile report."
        },
        {
            0,
            ""
        }
    };

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( iError == errorMsgs[i].iError )
        {
            printf("\nError(%d): %s\n", iError,
errorMsgs[i].szMsg);
            return;
        }
    }
    printf("Error(%d): %s", errorMsgs[0].szMsg);
    return;
}

/* FUNCTION: BOOL GetParameters(int argc, char *argv[])
*
* PURPOSE: This function parses the command line passed in to the
delivery executable, initializing
*
* and filling in global variable parameters.
*
* ARGUMENTS: int argc number of command line arguments
passed to delivery
*
* char *argv[] array of command line
argument pointers
*
* RETURNS: BOOL FALSE parameter read successfull
TRUE user has requested
parameter information screen be displayed.
*
* COMMENTS: None
*
*/
static BOOL GetParameters(int argc, char *argv[])
{
    int i;
    SYSTEMTIME startTime;
    SYSTEMTIME endTime;
    UINT uLogTitleLen;

    iStartTime = 0;
    iEndTime = 0;
    iReport = 4;
    strcpy(szLogFileTitle, DEFAULTLOGTITLE);

    for(i=0; i<argc; i++)
    {
        if ( argv[i][0] == '-' || argv[i][0] == '/' )
    }
}

```

```

        switch(argv[i][1])
        {
            case 'S':
            case 's':
                if ( ParseTime(argv[i]+2,
                    &startTime) )
                    return TRUE;
                iStartTime = (startTime.wHour *
                    3600000) + (startTime.wMinute * 60000) + (startTime.wSecond * 1000) +
                    startTime.wMilliseconds;
                break;
            case 'E':
            case 'e':
                if ( ParseTime(argv[i]+2, &endTime) )
                    return TRUE;
                iEndTime = (endTime.wHour * 3600000) +
                    (endTime.wMinute * 60000) + (endTime.wSecond * 1000) +
                    endTime.wMilliseconds;
                break;
            case 'R':
            case 'r':
                iReport = atoi(argv[i]+2);
                if ( iReport > 4 || iReport < 1 )
                    iReport = 4;
                break;
            case 'F':
            case 'f':
                uLogTitleLen = strlen(argv[i] - 2);
                if (uLogTitleLen > 0 && uLogTitleLen <
                    sizeof(szLogFileTitle))
                {
                    strcpy(szLogFileTitle,argv[i]+2);
                    printf("Log File Title set to %s",szLogFileTitle);
                };
                break;
            case '?':
                return TRUE;
        }
    }
    return FALSE;
}

/* FUNCTION: void PrintParameters(void)
 *
 * PURPOSE: This function displays the supported command line flags.
 *
 * ARGUMENTS: None
 *
 * RETURNS: None
 *
 * COMMENTS: None
 */

static void PrintParameters(void)
{
    PrintHeader();
    printf("DELIRPT:\n\n");

```

```

        printf("Parameter
Default\n");
        printf("-----\n");
        printf("-S Start Time HH:MM:SS:MMM
\n");
        printf("-E End Time HH:MM:SS:MMM
\n");
        printf("-R 1)Average Response, 2)90th 3) Skipped 4) All
\n");
        printf("-? This help screen\n\n");
        printf("Note: Command line switches are NOT case sensitive.\n");
    }
    return;
}

/* FUNCTION: void PrintHeader(void)
 *
 * PURPOSE: This function displays the delivery report applications
banner information.
 *
 * ARGUMENTS: None
 *
 * RETURNS: None
 *
 * COMMENTS: None
 */

static void PrintHeader(void)
{
    //cls();

    printf("*****\n");
    printf("**
\n");
    printf("** Microsoft SQL Server 7.0
\n");
    printf("**
\n");
    printf("** HTML TPC-C BENCHMARK KIT: Delivery Report
\n");
    printf("** Version %d.%2.2d.%3.3d
\n", versionMS, versionMM, versionLS);
    printf("**
\n");
    printf("*****\n\n");

    return;
}

/* FUNCTION: void cls(void)
 *
 * PURPOSE: This function clears the console window
 *
 * ARGUMENTS: None
 *
 * RETURNS: None
 *
 * COMMENTS: None
 */

static void cls(void)
{

```

```

        HANDLE hConsole;
        COORD coordScreen = { 0, 0 }; //here's where
we'll home the cursor
        DWORD cCharsWritten;
        CONSOLE_SCREEN_BUFFER_INFO csbi; //to get buffer info
        DWORD dwConSize; //number of character cells in the current buffer

        hConsole = GetStdHandle(STD_OUTPUT_HANDLE);

        //get the number of character cells in the current buffer

        GetConsoleScreenBufferInfo( hConsole, &csbi );
        dwConSize = csbi.dwSize.X * csbi.dwSize.Y;

        //fill the entire screen with blanks
        FillConsoleOutputCharacter( hConsole, (TCHAR) ' ', dwConSize,
coordScreen, &cCharsWritten );
        GetConsoleScreenBufferInfo( hConsole, &csbi );

        //now set the buffer's attributes accordingly
        FillConsoleOutputAttribute( hConsole, csbi.wAttributes, dwConSize,
coordScreen, &cCharsWritten );

        //put the cursor at (0, 0)
        SetConsoleCursorPosition( hConsole, coordScreen );

        return;
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
 *
 * PURPOSE: This function determines if a string is numeric. It fails
if any characters other
 *          than numeric and null terminator are present.
 *
 * ARGUMENTS: char *ptr pointer to string to check.
 *
 * RETURNS: BOOL FALSE if string is not all numeric
 *          TRUE if string contains
only numeric characters i.e. '0' - '9'
 *
 * COMMENTS: A comma is counted as a valid delimiter.
 *
 */

static BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    if ( !*ptr || *ptr == ',' )
        return TRUE;
    else
        return FALSE;
}

```



# Appendix B - Database Design

## Build Scripts

### BACKUP.SQL

```
-- File:      BACKUP.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates backup of tpcc database

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

backup database tpcc to tpccback1, tpccback2 with init, stats = 5

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
```

go

### CREATEDB.SQL

```
-- File:      CREATEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates tpcc database and backup files
--           for 1530 warehouses.
```

```
use master
go
```

```
-- remove any existing database and backup files
```

```
exec sp_dbremove tpcc, dropdev
exec sp_dropdevice 'tpccback1', delfile
exec sp_dropdevice 'tpccback2', delfile
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
-- create main database files
```

```
create database tpcc on
    (name="MSSQL70_tpcc_root",filename="C:\MSSQL7\Data\tpcc_root.mdf",
size=10MB, FILEGROWTH=0)
log on
    (name="MSSQL70_tpcc_log",filename="L:",size=32000MB, FILEGROWTH=0)
```

```
-- create filegroups
```

```
alter database tpcc add filegroup MSSQL70_misc_fg
alter database tpcc add filegroup MSSQL70_cs_fg
```

```
-- add files to filegroups
```

```
alter database tpcc add file
    (name="MSSQL70_misc1",filename="M:",size=6200MB, FILEGROWTH=0),
    (name="MSSQL70_misc2",filename="N:",size=6200MB, FILEGROWTH=0),
    (name="MSSQL70_misc3",filename="O:",size=6200MB, FILEGROWTH=0),
    (name="MSSQL70_misc4",filename="P:",size=6200MB, FILEGROWTH=0),
    (name="MSSQL70_misc5",filename="Q:",size=6200MB, FILEGROWTH=0),
    (name="MSSQL70_misc6",filename="R:",size=6200MB, FILEGROWTH=0),
    (name="MSSQL70_misc7",filename="S:",size=6200MB, FILEGROWTH=0)
to filegroup MSSQL70_misc_fg
```

```
alter database tpcc add file
    (name="MSSQL70_cs1",filename="E:",size=14300MB, FILEGROWTH=0),
    (name="MSSQL70_cs2",filename="F:",size=14300MB, FILEGROWTH=0),
    (name="MSSQL70_cs3",filename="G:",size=14300MB, FILEGROWTH=0),
    (name="MSSQL70_cs4",filename="H:",size=14300MB, FILEGROWTH=0),
    (name="MSSQL70_cs5",filename="I:",size=14300MB, FILEGROWTH=0),
    (name="MSSQL70_cs6",filename="J:",size=14300MB, FILEGROWTH=0),
    (name="MSSQL70_cs7",filename="K:",size=14300MB, FILEGROWTH=0)
to filegroup MSSQL70_cs_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
```

go

```
-- create backup devices
```

```
exec sp_addumpdevice 'disk','tpccback1','T:\tpccback1.dmp'
exec sp_addumpdevice 'disk','tpccback2','U:\tpccback2.dmp'
go
```

### DBOPT1.SQL

```
-- File:      DBOPT1.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
```

```
--          Copyright Microsoft, 1996
-- Purpose:  Sets database options for data load
```

```
use master
go
```

```
exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
go
```

```
use tpcc
go
```

```
checkpoint
go
```

## DBOPT2.SQL

```
-- File:      DBOPT2.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Resets database options after data load
```

```
use master
go
```

```
sp_dboption tpcc,'select ',false
go
```

```
sp_dboption tpcc,'trunc. ',false
go
```

```
use tpcc
go
```

```
checkpoint
go
```

```
sp_configure allow,1
go
```

```
reconfigure with override
go
```

```
/*                               */
/* Set option values for user-defined indexes */
/*                               */
```

```
sp_indexoption 'customer','AllowPageLocks',FALSE
go
sp_indexoption 'district','AllowPageLocks',FALSE
go
sp_indexoption 'warehouse','AllowPageLocks',FALSE
go
sp_indexoption 'stock','AllowPageLocks',FALSE
```

```
go
sp_indexoption 'order_line','AllowPageLocks',FALSE
go
sp_indexoption 'orders','AllowPageLocks',FALSE
go
sp_indexoption 'new_order','AllowRowLocks',FALSE
go
sp_indexoption 'item','AllowRowLocks',FALSE
go
sp_indexoption 'item','AllowPageLocks',FALSE
go
```

```
Print ' '
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print '   Lockflag = 0 ==> No pre-specified hierarchy'
Print '   Lockflag = 1 ==> Lock at Page-level then Table-level'
Print '   Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '   Lockflag = 3 ==> Lock at Table-level'
Print ' '
```

```
select name,lockflags
from sysindexes
where object_id("warehouse")=id or
       object_id("district")=id or
       object_id("customer")=id or
       object_id("stock")=id or
       object_id("orders")=id or
       object_id("order_line")=id or
       object_id("history")=id or
       object_id("new_order")=id or
       object_id("item")=id
order by lockflags asc
go
```

```
sp_configure allow,0
go
```

```
reconfigure with override
go
```

```
exec sp_dboption tpcc, 'auto update statistics', FALSE
exec sp_dboption tpcc, 'auto create statistics', FALSE
go
```

```
exec sp_tableoption "district","pintable",true
exec sp_tableoption "warehouse","pintable",true
exec sp_tableoption "new_order","pintable",true
exec sp_tableoption "item","pintable",true
go
```

## IDXCUSCL.SQL

```
-- File:      IDXCUSCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on customer table
```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_c1' )
    drop index customer.customer_c1

create unique clustered index customer_c1 on customer(c_w_id, c_d_id,
c_id)
    on MSSQL70_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

### IDXCUSNC.SQL

```

-- File:      IDXCUSNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates non-clustered index on customer table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_nc1' )
    drop index customer.customer_nc1

create unique nonclustered index customer_nc1 on customer(c_w_id, c_d_id,
c_last, c_first, c_id)
    on MSSQL70_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

### IDXDISCL.SQL

```

-- File:      IDXDISCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on district table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'district_c1' )
    drop index district.district_c1

create unique clustered index district_c1 on district(d_w_id, d_id)
    on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

### IDXITMCL.SQL

```

-- File:      IDXITMCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on item table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'item_c1' )
    drop index item.item_c1

create unique clustered index item_c1 on item(i_id)
    on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## IDXNODCL.SQL

```
-- File:      IDXNODCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on new_order table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'new_order_c1' )
    drop index new_order.new_order_c1
```

```
create unique clustered index new_order_c1 on new_order(no_w_id, no_d_id,
no_o_id)
    on MSSQL70_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
```

```
go
```

## IDXODLCL.SQL

```
-- File:      IDXODLCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on order_line table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'order_line_c1' )
    drop index order_line.order_line_c1
```

```
create unique clustered index order_line_c1 on order_line(ol_w_id,
ol_d_id, ol_o_id, ol_number)
    on MSSQL70_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
```

```
go
```

## IDXORDCL.SQL

```
-- File:      IDXORDCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on orders table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'orders_c1' )
    drop index orders.orders_c1
```

```
create unique clustered index orders_c1 on orders(o_w_id, o_d_id, o_id)
    on MSSQL70_misc_fg
```

```
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
```

```
go
```

## IDXORDNC.SQL

```
-- File:      IDXORDNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates non-clustered index on orders table
```

```
use tpcc
go
```

```
declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)
```

```
if exists ( select name from sysindexes where name = 'orders_nc1' )
    drop index orders.orders_nc1
```

```
create unique nonclustered index orders_nc1 on orders(o_w_id, o_d_id,
o_c_id, o_id)
    on MSSQL70_misc_fg
```

```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

```

go

## IDXSTKCL.SQL

```

-- File:      IDXSTKCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on stock table

```

```

use tpcc
go

```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

```

```

if exists ( select name from sysindexes where name = 'stock_c1' )
drop index stock.stock_c1

```

```

create unique clustered index stock_c1 on stock(s_i_id, s_w_id)
on MSSQL70_cs_fg

```

```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

```

go

## IDXWARCL.SQL

```

-- File:      IDXWARCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on warehouse table

```

```

use tpcc
go

```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

```

```

if exists ( select name from sysindexes where name = 'warehouse_c1' )
drop index warehouse.warehouse_c1

```

```

create unique clustered index warehouse_c1 on warehouse(w_id)

```

```

on MSSQL70_misc_fg

```

```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

```

go

## RESTORE.SQL

```

-- File:      RESTORE.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Loads database backup from backup files

```

```

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

```

```

restore database tpcc from tpccback1, tpccback2 with replace, stats = 5

```

```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

```

go

## TABLES .SQL

```

-- File:      TABLES.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates TPC-C tables

```

```

use tpcc
go

```

```

if exists ( select name from sysobjects where name = 'warehouse' )
drop table warehouse

```

go

```

create table warehouse
(

```

```

    w_id                smallint,
    w_name              char(10),
    w_street_1         char(20),
    w_street_2         char(20),
    w_city              char(20),
    w_state             char(2),
    w_zip              char(9),
    w_tax              numeric(4,4),
    w_ytd              numeric(12,2)

```

```

) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
create table district
(
    d_id                tinyint,
    d_w_id              smallint,
    d_name              char(10),
    d_street_1         char(20),
    d_street_2         char(20),
    d_city              char(20),
    d_state             char(2),
    d_zip              char(9),
    d_tax              numeric(4,4),
    d_ytd              numeric(12,2),
    d_next_o_id        int
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'customer' )
    drop table customer
go
create table customer
(
    c_id                int,
    c_d_id              tinyint,
    c_w_id              smallint,
    c_first             char(16),
    c_middle            char(2),
    c_last              char(16),
    c_street_1         char(20),
    c_street_2         char(20),
    c_city              char(20),
    c_state             char(2),
    c_zip              char(9),
    c_phone             char(16),
    c_since             datetime,
    c_credit            char(2),
    c_credit_lim        numeric(12,2),
    c_discount          numeric(4,4),
    c_balance           numeric(12,2),
    c_ytd_payment       numeric(12,2),
    c_payment_cnt       smallint,
    c_delivery_cnt       smallint,
    c_data              char(500)
) on MSSQL70_cs_fg
go

if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
create table history
(
    h_c_id              int,
    h_c_d_id            tinyint,
    h_c_w_id            smallint,
    h_d_id              tinyint,

```

```

    h_w_id              smallint,
    h_date              datetime,
    h_amount            numeric(6,2),
    h_data              char(24)
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
go
create table new_order
(
    no_o_id             int,
    no_d_id             tinyint,
    no_w_id             smallint
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'orders' )
    drop table orders
go
create table orders
(
    o_id                int,
    o_d_id              tinyint,
    o_w_id              smallint,
    o_c_id              int,
    o_entry_d           datetime,
    o_carrier_id        tinyint,
    o_ol_cnt            tinyint,
    o_all_local         tinyint
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line
go
create table order_line
(
    ol_o_id             int,
    ol_d_id             tinyint,
    ol_w_id             smallint,
    ol_number           tinyint,
    ol_i_id             int,
    ol_supply_w_id      smallint,
    ol_delivery_d        datetime,
    ol_quantity          smallint,
    ol_amount            numeric(6,2),
    ol_dist_info        char(24)
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'item' )
    drop table item
go
create table item
(
    i_id                int,
    i_im_id             int,
    i_name              char(24),

```

```

        i_price                numeric(5,2),
        i_data                 char(50)
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'stock' )
    drop table stock
go
create table stock
(
    s_i_id                    int,
    s_w_id                   smallint,
    s_quantity               smallint,
    s_dist_01                char(24),
    s_dist_02                char(24),
    s_dist_03                char(24),
    s_dist_04                char(24),
    s_dist_05                char(24),
    s_dist_06                char(24),
    s_dist_07                char(24),
    s_dist_08                char(24),
    s_dist_09                char(24),
    s_dist_10                char(24),
    s_ytd                    int,
    s_order_cnt              smallint,
    s_remote_cnt             smallint,
    s_data                   char(50)
) on MSSQL70_cs_fg
go

```

## VERIFYTPCCLOAD

```

use tpcc
print 'WAREHOUSE'
select rows from sysindexes where id=object_id("warehouse")
print 'DISTRICT = (10 * No of warehouses)'
select rows from sysindexes where id=object_id("district")
print 'ITEM = 100,000'
select rows from sysindexes where id=object_id("item")
print 'CUSTOMER = (30,000 * No of warehouses)'
select rows from sysindexes where id=object_id("customer")
print 'ORDERS = (30,000 * No of warehouses)'
select rows from sysindexes where id=object_id("orders")
print 'HISTORY = (30,000 * No of warehouses)'
select rows from sysindexes where id=object_id("history")
print 'STOCK = (100,000 * No of warehouses)'
select rows from sysindexes where id=object_id("stock")
print 'ORDER_LINE = (300,000 * No of warehouses + some change)'
select rows from sysindexes where id=object_id("order_line")
print 'NEW_ORDER = (9000 * No of warehouses)'
select rows from sysindexes where id=object_id("new_order")
print '*****Index Check*****'
use tpcc
go
sp_helpindex customer
go
sp_helpindex stock
go

```

```

sp_helpindex district
go
sp_helpindex item
go
sp_helpindex new_order
go
sp_helpindex orders
go
sp_helpindex order_line
go
sp_helpindex warehouse
go

```

## Stored Procedures

### DELIVERY.SQL

```

-- File:      DELIVERY.SQL
--            Microsoft TPC-C Benchmark Kit Ver. 4.00
--            Copyright Microsoft, 1996
-- Purpose:   Creates delivery transaction stored procedure

```

```

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_delivery" )
    drop procedure tpcc_delivery
go

create proc tpcc_delivery      @w_id          smallint,
                               @o_carrier_id smallint

as

declare @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
        @oid3 int,
        @oid4 int,
        @oid5 int,
        @oid6 int,
        @oid7 int,
        @oid8 int,
        @oid9 int,
        @oid10 int

select @d_id = 0

begin tran d

    while (@d_id < 10)
    begin

```

```

select @d_id = @d_id + 1,
       @total = 0,
       @o_id = 0

       select top 1 @o_id = no_o_id
       from new_order (serializable uplock)
where no_w_id = @w_id and
       no_d_id = @d_id
       order by no_o_id asc

if (@@rowcount <> 0)
begin
-- claim the order for this district

       delete new_order
       where no_w_id = @w_id and
             no_d_id = @d_id and
             no_o_id = @o_id

-- set carrier_id on this order (and get customer id)

       update orders
       set o_carrier_id = @o_carrier_id,
           @c_id = o_c_id
       where o_w_id = @w_id and
            o_d_id = @d_id and
            o_id = @o_id

-- set date in all lineitems for this order (and sum amounts)

       update order_line
       set ol_delivery_d = getdate(),
           @total = @total + ol_amount
       where ol_w_id = @w_id and
            ol_d_id = @d_id and
            ol_o_id = @o_id

-- accumulate lineitem amounts for this order into customer

       update customer
       set c_balance = c_balance + @total,
           c_delivery_cnt = c_delivery_cnt + 1

       where c_w_id = @w_id and
            c_d_id = @d_id and
            c_id = @c_id

end

select @oid1 = case @d_id when 1 then @o_id else @oid1 end,
       @oid2 = case @d_id when 2 then @o_id else @oid2 end,
       @oid3 = case @d_id when 3 then @o_id else @oid3 end,
       @oid4 = case @d_id when 4 then @o_id else @oid4 end,
       @oid5 = case @d_id when 5 then @o_id else @oid5 end,
       @oid6 = case @d_id when 6 then @o_id else @oid6 end,
       @oid7 = case @d_id when 7 then @o_id else @oid7 end,
       @oid8 = case @d_id when 8 then @o_id else @oid8 end,
       @oid9 = case @d_id when 9 then @o_id else @oid9 end,
       @oid10 = case @d_id when 10 then @o_id else @oid10 end

```

```

end
commit tran d
-- return delivery data to client

select @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10

go

```

## NEWORD.SQL

```

-- File:      NEWORD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates new order transaction stored procedure
--
-- Modified 9/21/98 - Jamie Reding - Microsoft Corporation
-- Reordered @rowcount check so that invalid supply warehouse id,
-- as well as invalid item id, is detected and causes explicit
-- transaction rollback.
--
use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_neworder" )
drop procedure tpcc_neworder
go

create proc tpcc_neworder

       @w_id      smallint,
       @d_id      tinyint,
       @c_id      int,
       @o_ol_cnt  tinyint,
       @o_all_local tinyint,
       @i_id1 int = 0, @s_w_id1 smallint =
0, @ol_qty1 smallint = 0,
       @i_id2 int = 0, @s_w_id2 smallint =
0, @ol_qty2 smallint = 0,
       @i_id3 int = 0, @s_w_id3 smallint =
0, @ol_qty3 smallint = 0,
       @i_id4 int = 0, @s_w_id4 smallint =
0, @ol_qty4 smallint = 0,
       @i_id5 int = 0, @s_w_id5 smallint =
0, @ol_qty5 smallint = 0,
       @i_id6 int = 0, @s_w_id6 smallint =
0, @ol_qty6 smallint = 0,

```



```

0, @ol_qty7 smallint = 0,
0, @ol_qty8 smallint = 0,
0, @ol_qty9 smallint = 0,
= 0, @ol_qty10 smallint = 0,
= 0, @ol_qty11 smallint = 0,
= 0, @ol_qty12 smallint = 0,
= 0, @ol_qty13 smallint = 0,
= 0, @ol_qty14 smallint = 0,
= 0, @ol_qty15 smallint = 0

as
declare @w_tax          numeric(4,4),
        @d_tax         numeric(4,4),
        @c_last        char(16),
        @c_credit       char(2),
        @c_discount     numeric(4,4),
        @i_price        numeric(5,2),
        @i_name         char(24),
        @i_data         char(50),
        @o_entry_d      datetime,
        @remote_flag    int,
        @s_quantity     smallint,
        @s_data         char(50),
        @s_dist         char(24),
        @li_no          int,
        @o_id           int,
        @commit_flag    tinyint,
        @li_id         int,
        @li_s_w_id     smallint,
        @li_qty        smallint,
        @ol_number      int,
        @c_id_local     int

begin
    begin transaction n
-- get district tax and next available order id and update
-- plus initialize local variables

    update district
    set      @d_tax      = d_tax,
            @o_id       = d_next_o_id,
            d_next_o_id = d_next_o_id + 1,
            @o_entry_d  = getdate(),
            @li_no      = 0,
            @commit_flag = 1
    where   d_w_id      = @w_id and
            d_id        = @d_id

        @i_id7  int = 0, @s_w_id7 smallint =
        @i_id8  int = 0, @s_w_id8 smallint =
        @i_id9  int = 0, @s_w_id9 smallint =
        @i_id10 int = 0, @s_w_id10 smallint =
        @i_id11 int = 0, @s_w_id11 smallint =
        @i_id12 int = 0, @s_w_id12 smallint =
        @i_id13 int = 0, @s_w_id13 smallint =
        @i_id14 int = 0, @s_w_id14 smallint =
        @i_id15 int = 0, @s_w_id15 smallint =

-- process orderlines
while (@li_no < @o_ol_cnt)
begin
    select @li_no = @li_no + 1

-- set i_id, s_w_id, and qty for this lineitem
    select @li_id = case @li_no
        when 1 then @i_id1
        when 2 then @i_id2
        when 3 then @i_id3
        when 4 then @i_id4
        when 5 then @i_id5
        when 6 then @i_id6
        when 7 then @i_id7
        when 8 then @i_id8
        when 9 then @i_id9
        when 10 then @i_id10
        when 11 then @i_id11
        when 12 then @i_id12
        when 13 then @i_id13
        when 14 then @i_id14
        when 15 then @i_id15
        end,

        @li_s_w_id = case @li_no
        when 1 then @s_w_id1
        when 2 then @s_w_id2
        when 3 then @s_w_id3
        when 4 then @s_w_id4
        when 5 then @s_w_id5
        when 6 then @s_w_id6
        when 7 then @s_w_id7
        when 8 then @s_w_id8
        when 9 then @s_w_id9
        when 10 then @s_w_id10
        when 11 then @s_w_id11
        when 12 then @s_w_id12
        when 13 then @s_w_id13
        when 14 then @s_w_id14
        when 15 then @s_w_id15
        end,

        @li_qty = case @li_no
        when 1 then @ol_qty1
        when 2 then @ol_qty2
        when 3 then @ol_qty3
        when 4 then @ol_qty4
        when 5 then @ol_qty5
        when 6 then @ol_qty6
        when 7 then @ol_qty7
        when 8 then @ol_qty8
        when 9 then @ol_qty9
        when 10 then @ol_qty10
        when 11 then @ol_qty11
        when 12 then @ol_qty12
        when 13 then @ol_qty13
        when 14 then @ol_qty14

```

```

        when 15 then @ol_qty15
        end
-- get item data (no one updates item)
        select @i_price = i_price,
               @i_name  = i_name,
               @i_data  = i_data
        from   item (tablock repeatableread)
        where  i_id = @li_id
-- update stock values
        update stock
        set     s_ytd      = s_ytd + @li_qty,
               @s_quantity = s_quantity -
@s_li_qty +
               case when (s_quantity - @li_qty < 10) then 91 else
0 end,
               s_order_cnt = s_order_cnt + 1,
               s_remote_cnt = s_remote_cnt +
               case
when (@li_s_w_id = @w_id) then 0 else 1 end,
               @s_data     = s_data,
               @s_dist     = case @d_id
                               when 1 then
s_dist_01
                               when 2 then s_dist_02
                               when 3 then s_dist_03
                               when 4 then s_dist_04
                               when 5 then s_dist_05
                               when 6 then s_dist_06
                               when 7 then s_dist_07
                               when 8 then s_dist_08
                               when 9 then s_dist_09
                               when 10 then s_dist_10
                               end
        where  s_i_id      = @li_id and
               s_w_id     = @li_s_w_id
-- if there actually is a stock (and item) with these ids, go to work
        if (@@rowcount > 0)
        begin
-- insert order_line data (using data from item and stock)
                insert into order_line values(@o_id,
@s_d_id,
@s_w_id,
@s_li_no,
@s_li_id,
@s_li_s_w_id,

```

```

        "dec 31, 1899",
        @li_qty,
        @i_price * @li_qty,
        @s_dist)
-- send line-item data to client
                select @i_name,
                       @s_quantity,
                       b_g = case when (
(patindex("%ORIGINAL%",@i_data) > 0) and
(patindex("%ORIGINAL%",@s_data) > 0) )
                               then "B" else "G"
end,
                       @i_price,
                       @i_price * @li_qty
        else
        begin
-- no item (or stock) found - triggers rollback condition
                select "",0,"",0,0
                select @commit_flag = 0
        end
-- get customer last name, discount, and credit rating
        select @c_last      = c_last,
               @c_discount = c_discount,
               @c_credit   = c_credit,
               @c_id_local = c_id
        from   customer (repeatableread)
        where  c_id        = @c_id and
               c_w_id     = @w_id and
               c_d_id     = @d_id
-- insert fresh row into orders table
        insert into orders values (@o_id,
@s_d_id,
@s_w_id,
@s_c_id_local,
@s_entry_d,
0,
@s_ol_cnt,
@s_o_all_local)
-- insert corresponding row into new-order table

```

```

insert into new_order values (@o_id,
                              @d_id,
                              @w_id)

-- select warehouse tax

select @w_tax = w_tax
from warehouse (repeatableread)
where w_id = @w_id

if (@commit_flag = 1)
    commit transaction n
else

-- all that work for nuthin!!!

    rollback transaction n

-- return order data to client

select @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag

end
go

```

## ORDSTAT.SQL

```

-- File:      ORDSTAT.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates order status transaction stored procedure

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_orderstatus" )
    drop procedure    tpcc_orderstatus
go

create proc tpcc_orderstatus @w_id          smallint,
                             @d_id          tinyint,
                             @c_id          int,
                             @c_last       char(16) = ""
as

declare @c_balance    numeric(12,2),
        @c_first      char(16),

```

```

        @c_middle      char(2),
        @o_id          int,
        @o_entry_d     datetime,
        @o_carrier_id  smallint,
        @cnt           smallint

begin tran o

    if (@c_id = 0)
        begin

-- get customer id and info using last name

            select @cnt = (count(*)+1)/2
            from customer (repeatableread)
            where c_last = @c_last and
                  c_w_id = @w_id and
                  c_d_id = @d_id

            set rowcount @cnt

            select @c_id = c_id,
                   @c_balance = c_balance,
                   @c_first = c_first,
                   @c_last = c_last,
                   @c_middle = c_middle
            from customer (repeatableread)
            where c_last = @c_last and
                  c_w_id = @w_id and
                  c_d_id = @d_id
            order by c_w_id, c_d_id, c_last, c_first

            set rowcount 0
        end

    else
        begin

-- get customer info if by id

            select @c_balance = c_balance,
                   @c_first = c_first,
                   @c_middle = c_middle,
                   @c_last = c_last
            from customer (repeatableread)
            where c_id = @c_id and
                  c_d_id = @d_id and
                  c_w_id = @w_id

            select @cnt = @@rowcount

        end

-- if no such customer

        if (@cnt = 0)
            begin
                raiserror("Customer not found",18,1)
                goto custnotfound
            end
end

```

```

-- get order info

select @o_id = o_id,
       @o_entry_d = o_entry_d,
       @o_carrier_id = o_carrier_id
from orders (serializable)
where o_c_id = @c_id and
      o_d_id = @d_id and
      o_w_id = @w_id
order by o_id asc

-- select order lines for the current order

select ol_supply_w_id,
       ol_i_id,
       ol_quantity,
       ol_amount,
       ol_delivery_d
from order_line (repeatableread)
where ol_o_id = @o_id and
      ol_d_id = @d_id and
      ol_w_id = @w_id

```

custnotfound:

commit tran o

-- return data to client

```

select @c_id,
       @c_last,
       @c_first,
       @c_middle,
       @o_entry_d,
       @o_carrier_id,
       @c_balance,
       @o_id

```

go

## PAYMENTS.SQL

```

-- File:      PAYMENT.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates payment transaction stored procedure

```

use tpcc  
go

```

if exists (select name from sysobjects where name = "tpcc_payment" )
drop procedure tpcc_payment

```

go

```

create proc tpcc_payment @w_id          smallint,
                        @c_w_id        smallint,

```

```

numeric(6,2),

```

""

as

```

declare @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city     char(20),
        @w_state    char(2),
        @w_zip      char(9),
        @w_name     char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city     char(20),
        @d_state    char(2),
        @d_zip      char(9),
        @d_name     char(10),
        @c_first    char(16),
        @c_middle   char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city     char(20),
        @c_state    char(2),
        @c_zip      char(9),
        @c_phone    char(16),
        @c_since    datetime,
        @c_credit   char(2),
        @c_credit_lim numeric(12,2),
        @c_balance  numeric(12,2),
        @c_discount numeric(4,4),
        @data       char(500),
        @c_data     char(500),
        @datetime   datetime,
        @w_ytd      numeric(12,2),
        @d_ytd      numeric(12,2),
        @cnt        smallint,
        @val        smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local  smallint,
        @c_id_local  int

```

```

select @screen_data = ""

```

begin tran p

-- get payment date

```

select @datetime = getdate()

```

```

if (@c_id = 0)
begin

```

-- get customer id and info using last name

@h\_amount

```

@d_id      tinyint,
@c_d_id    tinyint,
@c_id      int,
@c_last    char(16) =

```

```

select @cnt = count(*)
from customer (repeatableread)
where c_last = @c_last and
      c_w_id = @c_w_id and
      c_d_id = @c_d_id

select @val = (@cnt + 1) / 2
set rowcount @val

select @c_id = c_id
from customer (repeatableread)
where c_last = @c_last and
      c_w_id = @c_w_id and
      c_d_id = @c_d_id
order by c_last, c_first

set rowcount 0
end

-- get customer info and update balances

update customer set
  @c_balance      = c_balance = c_balance - @h_amount,
  c_payment_cnt   = c_payment_cnt + 1,
  c_ytd_payment   = c_ytd_payment + @h_amount,
  @c_first        = c_first,
  @c_middle       = c_middle,
  @c_last         = c_last,
  @c_street_1     = c_street_1,
  @c_street_2     = c_street_2,
  @c_city         = c_city,
  @c_state        = c_state,
  @c_zip          = c_zip,
  @c_phone        = c_phone,
  @c_credit       = c_credit,
  @c_credit_lim   = c_credit_lim,
  @c_discount     = c_discount,
  @c_since        = c_since,
  @data          = c_data,
  @c_id_local     = c_id
where c_id = @c_id and
      c_w_id = @c_w_id and
      c_d_id = @c_d_id

-- if customer has bad credit get some more info

if (@c_credit = "BC")
begin

-- compute new info

select @c_data = convert(char(5),@c_id) +
              convert(char(4),@c_d_id) +
              convert(char(5),@c_w_id) +
              convert(char(4),@d_id) +
              convert(char(5),@w_id) +
              convert(char(19),@h_amount) +
              substring(@data, 1, 458)

-- update customer info

update customer set
  c_data = @c_data
where c_id = @c_id and
      c_w_id = @c_w_id and
      c_d_id = @c_d_id

select @screen_data = substring (@c_data,1,200)
end

-- get district data and update year-to-date

update district
set d_ytd      = d_ytd + @h_amount,
    @d_street_1 = d_street_1,
    @d_street_2 = d_street_2,
    @d_city     = d_city,
    @d_state    = d_state,
    @d_zip      = d_zip,
    @d_name     = d_name,
    @d_id_local = d_id
where d_w_id = @w_id and
      d_id = @d_id

-- get warehouse data and update year-to-date

update warehouse
set w_ytd      = w_ytd + @h_amount,
    @w_street_1 = w_street_1,
    @w_street_2 = w_street_2,
    @w_city     = w_city,
    @w_state    = w_state,
    @w_zip      = w_zip,
    @w_name     = w_name,
    @w_id_local = w_id
where w_id = @w_id

-- create history record

insert into history values (@c_id_local,
                           @c_d_id,
                           @c_w_id,
                           @d_id_local,
                           @w_id_local,
                           @datetime,
                           @h_amount,
                           @w_name + "
" + @d_name)

commit tran p

-- return data to client

select @c_id,
       @c_last,
       @datetime,
       @w_street_1,
       @w_street_2,
       @w_city,

```

```

@w_state,
@w_zip,
@d_street_1,
@d_street_2,
@d_city,
@d_state,
@d_zip,
@c_first,
@c_middle,
@c_street_1,
@c_street_2,
@c_city,
@c_state,
@c_zip,
@c_phone,
@c_since,
@c_credit,
@c_credit_lim,
@c_discount,
@c_balance,
@screen_data

```

go

## STOCKLEV.SQL

```

-- File:      STOCKLEV.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates stock level transaction stored procedure

```

```

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_stocklevel" )
    drop procedure tpcc_stocklevel
go

create proc tpcc_stocklevel    @w_id          smallint,
                              @d_id          tinyint,
                              @threshold    smallint
as

    declare @o_id_low int,
            @o_id_high int

    select @o_id_low = (d_next_o_id - 20),
           @o_id_high = (d_next_o_id - 1)
    from district
    where d_w_id = @w_id and
          d_id   = @d_id

    select count(distinct(s_i_id))
           from stock, order_line
    where ol_w_id = @w_id and
          ol_d_id = @d_id and
          ol_o_id between @o_id_low and @o_id_high and
          s_w_id   = ol_w_id and

```

```

s_i_id    = ol_i_id and
s_quantity < @threshold

```

go

## Loader Source

### GETARGS.C

```

//      File:      GETARGS.C
//      Microsoft TPC-C Kit Ver. 4.00
//      Copyright Microsoft, 1996, 1997, 1998
//      Purpose:   Source file for command line processing

// Includes
#include "tpcc.h"

//=====
//
// Function name: GetArgsLoader
//
//=====

void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{
    int          i;
    char         *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int)
GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server          = SERVER;
    pargs->user             = USER;
    pargs->password        = PASSWORD;
    pargs->database        = DATABASE;
    pargs->batch           = BATCH;
    pargs->num_warehouses  = UNDEF;
    pargs->tables_all      = TRUE;
    pargs->table_item      = FALSE;
    pargs->table_warehouse = FALSE;
    pargs->table_customer  = FALSE;
    pargs->table_orders    = FALSE;
    pargs->loader_res_file  = LOADER_RES_FILE;
    pargs->pack_size       = DEF_LD_PACK_SIZE;
    pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
    pargs->build_index      = BUILD_INDEX;
    pargs->index_order     = INDEX_ORDER;
    pargs->index_script_path = INDEX_SCRIPT_PATH;
    pargs->scale_down      = SCALE_DOWN;

```

```

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for ( i = 1; i < argc; ++i)
{
    if (argv[i][0] != '-' && argv[i][0] != '/')
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];

    switch (ptr[1])
    {
    case 'h':      /* Fall throught */
    case 'H':
        GetArgsLoaderUsage();
        break;

    case 'D':
        pargs->database = ptr+2;
        break;

    case 'P':
        pargs->password = ptr+2;
        break;

    case 'S':
        pargs->server = ptr+2;
        break;

    case 'U':
        pargs->user = ptr+2;
        break;

    case 'b':
        pargs->batch = atol(ptr+2);
        break;

    case 'W':
        pargs->num_warehouses = atol(ptr+2);
        break;

    case 's':
        pargs->starting_warehouse = atol(ptr+2);
        break;

    case 't':
        {
            pargs->tables_all = FALSE;
            if (strcmp(ptr+2,"item") == 0)
                pargs->table_item = TRUE;
            else if (strcmp(ptr+2,"warehouse")
                pargs->table_warehouse =

```

```

== 0)
TRUE;

```

```

0)
0)
else if (strcmp(ptr+2,"customer") ==
    pargs->table_customer = TRUE;
else if (strcmp(ptr+2,"orders") ==
    pargs->table_orders = TRUE;
else
{
    printf("\nUnrecognized command");
    GetArgsLoaderUsage();
    exit(1);
}
break;
}
case 'f':
    pargs->loader_res_file = ptr+2;
    break;
case 'p':
    pargs->pack_size = atol(ptr+2);
    break;
case 'i':
    pargs->build_index = atol(ptr+2);
    break;
case 'o':
    pargs->index_order = atol(ptr+2);
    break;
case 'c':
    pargs->scale_down = atol(ptr+2);
    break;
case 'd':
    pargs->index_script_path = ptr+2;
    break;
default:
    GetArgsLoaderUsage();
    exit(-1);
    break;
}
}
/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
    printf("Number of Warehouses is required\n");
    exit(-2);
}
return;
}
//=====
//

```

```

// Function name: GetArgsLoaderUsage
//
//=====

void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int)
GetCurrentThreadId());
#endif

    printf("TPCCLDR:\n\n");
    printf("Parameter
Default\n");
    printf("-----\n");
    printf("-W Number of Warehouses to Load          Required
\n");
    printf("-S Server                                %s\n",
SERVER);
    printf("-U Username                                %s\n",
USER);
    printf("-P Password                                %s\n",
PASSWORD);
    printf("-D Database                                %s\n",
DATABASE);
    printf("-b Batch Size
%ld\n", (long) BATCH);
    printf("-p TDS packet size
%ld\n", (long) DEFALDPACKSIZE);
    printf("-f Loader Results Output Filename
%s\n", LOADER_RES_FILE);
    printf("-s Starting Warehouse
%ld\n", (long) DEF_STARTING_WAREHOUSE);
    printf("-i Build Option (data = 0, data and index = 1)
%ld\n", (long) BUILD_INDEX);
    printf("-o Cluster Index Build Order (before = 1, after = 0)
%ld\n", (long) INDEX_ORDER);
    printf("-c Build Scaled Database (normal = 0, tiny = 1)
%ld\n", (long) SCALE_DOWN);
    printf("-d Index Script Path
%s\n", INDEX_SCRIPT_PATH);
    printf("-t Table to Load                      all
tables \n");
    printf("    [item|warehouse|customer|orders]\n");
    printf("    Notes: \n");
    printf("    - the '-t' parameter may be included multiple times to
\n");
    printf("        specify multiple tables to be loaded \n");
    printf("    - 'item' loads ITEM table \n");
    printf("    - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables
\n");
    printf("    - 'customer' loads CUSTOMER and HISTORY tables \n");
    printf("    - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables
\n");

    printf("\nNote: Command line switches are case sensitive.\n");

```

```

}
exit(0);
}

RANDOM.C

// File: RANDOM.C
// Microsoft TPC-C Kit Ver. 4.00
// Copyright Microsoft, 1996, 1997, 1998
// Purpose: Random number generation routines for database
loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A 16807
#define M 2147483647
#define Q 127773 /* M div A */
#define R 2836 /* M mod A */
#define Thread __declspec(thread)

// Globals
long Thread Seed = 0; /* thread local seed */

/*****
****
*
* random -
*
* Implements a GOOD pseudo random number generator. This generator
*
* will/should? run the complete period before repeating.
*
*
* Copied from:
*
* Random Numbers Generators: Good Ones Are Hard to Find.
*
* Communications of the ACM - October 1988 Volume 31 Number 10
*
*
* Machine Dependencies:
*
* long must be 2 ^ 31 - 1 or greater.
*
*
*****/

/*****
****

```



```

* seed - load the Seed value used in irand and drand. Should be used
before *
*     first call to irand or drand.
*
*****
****/

void seed(long val)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n",Seed, val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

/*****
****
*
*
* irand - returns a 32 bit integer pseudo random number with a period of
*
*     1 to 2 ^ 32 - 1.
*
*
* parameters:
*
*     none.
*
*
* returns:
*
*     32 bit integer - defined as long ( see above ).
*
*
* side effects:
*
*     seed get recomputed.
*****
****/

long irand()
{
    register long    s;        /* copy of seed */
    register long    test;     /* test flag */
    register long    hi;       /* tmp value for speed */
    register long    lo;       /* tmp value for speed */

#ifdef DEBUG

```

```

    printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

/*****
****
*
*
* drand - returns a double pseudo random number between 0.0 and 1.0.
*
*     See irand.
*
*****
****/
double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0);
}

//=====
// Function      : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int)
GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else

```

```

        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-
96 perf enhancement */

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
        (int) GetCurrentThreadId(), lower, upper,
        rand_num);
#endif

    return rand_num;
}

#if 0

//Original code pgd 08/13/96

long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int)
GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper -
lower : upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
        (int) GetCurrentThreadId(), lower, upper,
        rand_num);
#endif

    return rand_num;
}
#endif

//=====
// Function   : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

```

```

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int)
GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-
x+1))+x;

#ifdef DEBUG
    printf("[%ld]DBG: NURand: num = %d\n", (int) GetCurrentThreadId(),
rand_num);
#endif

    return rand_num;
}

```

## STRINGS.C

```

//      File:          STRINGS.C
//
//      Microsoft TPC-C Kit Ver. 4.00
//      Copyright Microsoft, 1996, 1997, 1998
//      Purpose:       Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
//
// Function name: MakeAddress
//
//=====

void MakeAddress(char *street_1,
                char *street_2,
                char *city,
                char *state,
                char *zip)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAddress()\n", (int)
GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString ( 2,  2, STATE_LEN, state);
    MakeZipNumberString( 9,  9, ZIP_LEN, zip);

#ifdef DEBUG
    printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s,
state: %s, zip: %s\n",

```

```

        (int) GetCurrentThreadId(), street_1, street_2,
city, state, zip);
#endif

    return;
}

//=====
//
// Function name: LastName
//
//=====

void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT", "ABLE" , "PRI" , "PRES",
        "ESE" , "ANTI" , "CALLY", "ATION", "EING"
    };

#ifdef DEBUG
    printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
        exit(-1);
    }

#ifdef DEBUG
    printf("[%ld]DBG: LastName: num = [%d] ==> [%d][%d][%d]\n",
          (int) GetCurrentThreadId(), num, num/100,
(num/10)%10, num%10);
    printf("[%ld]DBG: LastName: String = %s\n", (int)
GetCurrentThreadId(), name);
#endif

    return;
}

```

```

//=====
//
// Function name: MakeAlphaString
//
//=====

//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random
alphanumeric
//(respectively, numeric) characters of a random length of minimum x,
maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only
other
//requirement is that the character set used "must be able to represent a
minimum
//of 128 different characters". We are using 8-bit chars, so this is a
non issue.
//It is completely unreasonable to stuff non-printing chars into the text
fields.
//-CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0, chArrayMax)];
    if ( len < z )
        memset(str+len, ' ', z - len);
    str[len] = 0;

    return len;
}

//=====
//
// Function name: MakeOriginalAlphaString
//
//=====

int MakeOriginalAlphaString(int x,
                            int y,
                            int z,
                            char *str,

```

```

        int percent)
{
    int    len;
    int    val;
    int    start;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage: %d\n",
percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if ((x + y) <= 8)
    {
        printf("MakeOriginalAlphaString: string length must be >=
8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }

#ifdef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
(int) GetCurrentThreadId(), str);
#endif

    return strlen(str);
}

//=====
//
// Function name: MakeNumberString
//
//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16,
16, string)

    memset(str, '0', 16);

```

```

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

//=====
//
// Function name: MakeZipNumberString
//
//=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9,
9, string)

    strcpy(str, "000011111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
//
// Function name: InitString
//
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int)
GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

//=====
//
// Function name: InitAddress
//
// Description:
//
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state,
char *zip)
{

```

```

memset(street_1, ' ', ADDRESS_LEN+1);
memset(street_2, ' ', ADDRESS_LEN+1);
memset(city, ' ', ADDRESS_LEN+1);

street_1[ADDRESS_LEN+1] = 0;
street_2[ADDRESS_LEN+1] = 0;
city[ADDRESS_LEN+1] = 0;

memset(state, ' ', STATE_LEN+1);
state[STATE_LEN+1] = 0;

memset(zip, ' ', ZIP_LEN+1);
zip[ZIP_LEN+1] = 0;
}

```

```

//=====
//
// Function name: PaddString
//
//=====

```

```

void PaddString(int max, char *name)
{
    int len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

### TIME.C

```

// File: TIME.C
// Microsoft TPC-C Kit Ver. 4.00
// Copyright Microsoft, 1996, 1997, 1998
// Purpose: Source file for time functions

```

```

// Includes
#include "tpcc.h"

```

```

// Globals
static long start_sec;

```

```

//=====
//
// Function name: TimeNow
//
//=====

```

```

long TimeNow()
{
    long time_now;
    struct _timeb el_time;

```

```

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

### TPCC.H

```

// File: TPCC.H
// Microsoft TPC-C Kit Ver. 4.00
// Copyright Microsoft, 1996, 1997, 1998
// Purpose: Header file for TPC-C database loader

```

```

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.00"

```

```

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>

```

```

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

```

```

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

```

```

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"
#define USER "sa"
#define PASSWORD ""

```

```

// Default loader arguments
#define BATCH 10000

```

```

#define DEFLDPACKSIZE      32768
#define ORDERS_PER_DIST    3000
#define LOADER_RES_FILE    "logs\\load.out"
#define LOADER_NURAND_C    123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX        1 // build both
data and indexes
#define INDEX_ORDER        1 // build
indexes before load
#define SCALE_DOWN        0 // build a normal
scale database
#define INDEX_SCRIPT_PATH  "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all; // set
if loading all tables
    BOOL table_item; // set
if loading ITEM table specifically
    BOOL table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL table_customer; // set
if loading CUSTOMER and HISTORY
    BOOL table_orders; // set if
loading NEW-ORDER, ORDERS, ORDER-LINE
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    char *loader_res_file;
    char *synch_servername;
    long case_sensitivity;
    long starting_warehouse;
    long build_index;
    long index_order;
    long scale_down;
    char *index_script_path;
} TPCCLDR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10

```

```

#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

```

```

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

```

## TPCCLDR.C

```

// File: TPCCLDR.C
// Microsoft TPC-C Kit Ver. 4.00
// Copyright Microsoft, 1996, 1997, 1998
// Purpose: Source file for TPC-C database loader

// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS 100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000

```

```

#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4

// Functions declarations

void HandleErrorDBC (SQLHDBC hdbc1);

long NURand();
void LoadItem();
void LoadWarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures

typedef struct
{
    long            ol;
    long            ol_i_id;
    short           ol_supply_w_id;
    short           ol_quantity;
    double          ol_amount;
    char            ol_dist_info[DIST_INFO_LEN+1];
    char            ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long            o_id;
    short           o_d_id;
    short           o_w_id;
    long            o_c_id;
    short           o_carrier_id;
    short           o_ol_cnt;
    short           o_all_local;
    ORDER_LINE_STRUCT o_ol[15];

```

```

} ORDERS_STRUCT;

typedef struct
{
    long            c_id;
    short           c_d_id;
    short           c_w_id;
    char            c_first[FIRST_NAME_LEN+1];
    char            c_middle[MIDDLE_NAME_LEN+1];
    char            c_last[LAST_NAME_LEN+1];
    char            c_street_1[ADDRESS_LEN+1];
    char            c_street_2[ADDRESS_LEN+1];
    char            c_city[ADDRESS_LEN+1];
    char            c_state[STATE_LEN+1];
    char            c_zip[ZIP_LEN+1];
    char            c_phone[PHONE_LEN+1];
    char            c_credit[CREDIT_LEN+1];
    double          c_credit_lim;
    double          c_discount;
    // fix to avoid ODBC float to numeric conversion problem.
    // double
    char            c_balance;
    char            c_balance[6];

    double          c_ytd_payment;
    short           c_payment_cnt;
    short           c_delivery_cnt;
    char            c_data[C_DATA_LEN+1];
    double          h_amount;
    char            h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char            c_last[LAST_NAME_LEN+1];
    char            c_first[FIRST_NAME_LEN+1];
    long            c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long            time_start;
} LOADER_TIME_STRUCT;

// Global variables

char            szLastError[300];

HENV            henv;

HDBC            i_hdbc1; // for ITEM table
HDBC            w_hdbc1; // for WAREHOUSE,
DISTRICT, STOCK
HDBC            c_hdbc1; // for CUSTOMER
HDBC            c_hdbc2; // for HISTORY
HDBC            o_hdbc1; // for ORDERS
HDBC            o_hdbc2; // for NEW-ORDER
HDBC            o_hdbc3; // for ORDER-LINE

```

```

HSTMT i_hstmt1;
HSTMT w_hstmt1;
HSTMT c_hstmt1, c_hstmt2;
HSTMT o_hstmt1, o_hstmt2, o_hstmt3;

ORDERS_STRUCT orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long orders_rows_loaded;
long new_order_rows_loaded;
long order_line_rows_loaded;
long history_rows_loaded;
long customer_rows_loaded;
long stock_rows_loaded;
long district_rows_loaded;
long item_rows_loaded;
long warehouse_rows_loaded;
long main_time_start;
long main_time_end;
long max_items;
long customers_per_district;
long orders_per_district;
long first_new_order;
long last_new_order;

TPCCLDR_ARGS *aptr, args;

//=====
//
// Function name: main
//
//=====

int main(int argc, char **argv)
{
    DWORD dwThreadID[MAX_MAIN_THREADS];
    HANDLE hThread[MAX_MAIN_THREADS];
    FILE *fLoader;
    char buffer[255];
    int i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");
    printf("\n* *");
    printf("\n* Microsoft SQL Server *");
    printf("\n* *");
    printf("\n* TPC-C BENCHMARK KIT: Database loader *");
    printf("\n* Version %s *",
TPCKIT_VER);
    printf("\n* *");
    printf("\n*****\n\n");
};

// process command line arguments
aptr = &args;

```

```

GetArgsLoader(argc, argv, aptr);

printf("Build interface is ODBC.\n");

if (aptr->build_index == 0)
    printf("Data load only - no index creation.\n");
else
    printf("Data load and index creation.\n");

if (aptr->index_order == 0)
    printf("Clustered indexes will be created after bulk
load.\n");
else
    printf("Clustered indexes will be created before bulk
load.\n");

// set database scale values
if (aptr->scale_down == 1)
{
    printf("*** Scaled Down Database ***\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district = CUSTOMERS_SCALE_DOWN;
    orders_per_district = ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// start loading data

sprintf(buffer, "TPC-C load started for %ld warehouses.\n", aptr-
>num_warehouses);

printf("%s", buffer);
fprintf(fLoader, "%s", buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads

```



```

    if (aptr->tables_all || aptr->table_item)
    {
        fprintf(fLoader, "\nStarting loader threads for: item\n");
        hThread[0] = CreateThread(NULL,
                                0,
                                (LPTHREAD_START_ROUTINE) LoadItem,
                                NULL,
                                0,
                                &dwThreadID[0]);
        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating thread =
0.\n");
            exit(-1);
        }
        if (aptr->tables_all || aptr->table_warehouse)
        {
            fprintf(fLoader, "Starting loader threads for:
warehouse\n");
            hThread[1] = CreateThread(NULL,
                                    0,
                                    (LPTHREAD_START_ROUTINE) LoadWarehouse,
                                    NULL,
                                    0,
                                    &dwThreadID[1]);
            if (hThread[1] == NULL)
            {
                printf("Error, failed in creating creating thread =
1.\n");
                exit(-1);
            }
            if (aptr->tables_all || aptr->table_customer)
            {
                fprintf(fLoader, "Starting loader threads for:
customer\n");
                hThread[2] = CreateThread(NULL,
                                        0,
                                        (LPTHREAD_START_ROUTINE) LoadCustomer,
                                        NULL,
                                        0,
                                        &dwThreadID[2]);
                if (hThread[2] == NULL)
                {

```

```

                                printf("Error, failed in creating creating main
thread = 2.\n");
                                exit(-1);
                            }
                        if (aptr->tables_all || aptr->table_orders)
                        {
                            fprintf(fLoader, "Starting loader threads for: orders\n");
                            hThread[3] = CreateThread(NULL,
                                                        0,
                                                        (LPTHREAD_START_ROUTINE) LoadOrders,
                                                        NULL,
                                                        0,
                                                        &dwThreadID[3]);
                            if (hThread[3] == NULL)
                            {
                                printf("Error, failed in creating creating main
thread = 3.\n");
                                exit(-1);
                            }
                            // Wait for threads to finish...
                            for (i=0; i<MAX_MAIN_THREADS; i++)
                            {
                                if (hThread[i] != NULL)
                                {
                                    WaitForSingleObject( hThread[i], INFINITE );
                                    CloseHandle(hThread[i]);
                                    hThread[i] = NULL;
                                }
                            }
                            main_time_end = (TimeNow() / MILLI);
                            sprintf(buffer, "\nTPC-C load completed successfully in %ld
minutes.\n",
                                    (main_time_end - main_time_start)/60);
                            printf("%s",buffer);
                            fprintf(fLoader, "%s", buffer);
                            fclose(fLoader);
                            SQLFreeEnv(henv);
                            exit(0);
                            return 0;
                        }
                    }
//=====
//
// Function name: LoadItem

```

```

//
//=====
void LoadItem()
{
    long          i_id;
    long          i_im_id;
    char          i_name[I_NAME_LEN+1];
    double        i_price;
    char          i_data[I_DATA_LEN+1];
    char          name[20];
    long          time_start;
    RETCODE       rc;
    DBINT         rcint;
    char          bcphint[128];

    // Seed with unique number
    seed(1);

    printf("Loading item table...\n");

    // if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitmcl");

    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);

    sprintf(name, "%s..%s", aptr->database, "item");

    rc = bcp_init(i_hdbc1, name, NULL, "logs\\item.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (i_id), ROWS_PER_BATCH =
100000");
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(i_hdbc1);
    }

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0,
3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 4);

```

```

    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, I_DATA_LEN, NULL, 0, 0,
5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(i_hdbc1);

    time_start = (TimeNow() / MILLI);

    item_rows_loaded = 0;

    for (i_id = 1; i_id <= max_items; i_id++)
    {
        i_im_id = RandomNumber(1L, 10000L);

        MakeAlphaString(14, 24, I_NAME_LEN, i_name);

        i_price = ((float) RandomNumber(100L, 10000L))/100.0;

        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEEDED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
    }

    rcint = bcp_done(i_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmcl");
}

//=====
//
// Function    : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are
// created
//
//=====
void LoadWarehouse()

```

```

{
short      w_id;
char       w_name[W_NAME_LEN+1];
char       w_street_1[ADDRESS_LEN+1];
char       w_street_2[ADDRESS_LEN+1];
char       w_city[ADDRESS_LEN+1];
char       w_state[STATE_LEN+1];
char       w_zip[ZIP_LEN+1];
double     w_tax;
double     w_ytd;
char       name[20];
long       time_start;
RETCODE rc;
DBINT      rcint;
char       bcphint[128];

// Seed with unique number
seed(2);

printf("Loading warehouse table...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxwarcl");

InitString(w_name, W_NAME_LEN+1);
InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

sprintf(name, "%s..%s", aptr->database, "warehouse");

rc = bcp_init(w_hdbc1, name, NULL, "logs\\whouse.err", DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (w_id), ROWS_PER_BATCH =
%d", aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 1);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0,
2);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL,
0, 0, 3);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL,
0, 0, 4);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0,
0, 5);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0,
6);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, 7);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 8);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (short)aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
{
    MakeAlphaString(6,10, W_NAME_LEN, w_name);
    MakeAddress(w_street_1, w_street_2, w_city, w_state,
w_zip);

    w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

    w_ytd = 300000.00;

    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded,
"warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

```

```

// if build index after load..
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxwarcl");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();
}

//=====
//
// Function   : District
//
//=====

void District()
{
    short    d_id;
    short    d_w_id;
    char     d_name[D_NAME_LEN+1];
    char     d_street_1[ADDRESS_LEN+1];
    char     d_street_2[ADDRESS_LEN+1];
    char     d_city[ADDRESS_LEN+1];
    char     d_state[STATE_LEN+1];
    char     d_zip[ZIP_LEN+1];
    double   d_tax;
    double   d_ytd;
    char     name[20];
    long     d_next_o_id;
    long     time_start;
    int      w_id;
    RETCODE rc;
    DBINT    rcint;
    char     bcphint[128];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
    sprintf(name, "%s..%s", aptr->database, "district");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\district.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (d_w_id, d_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 10));

```

```

        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0,
3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL,
0, 0, 4);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL,
0, 0, 5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0,
0, 6);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0,
7);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 10);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 11);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    d_ytd = 30000.0;

```

```

    d_next_o_id = orders_per_district+1;

    time_start = (TimeNow() / MILLI);

    for (w_id = aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
    {
        d_w_id = w_id;

        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {
            MakeAlphaString(6,10,D_NAME_LEN, d_name);

            MakeAddress(d_street_1, d_street_2, d_city,
d_state, d_zip);

            d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

            rc = bcp_sendrow(w_hdbc1);
            if (rc != SUCCEED)
                HandleErrorDBC(w_hdbc1);

            district_rows_loaded++;
            CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
        }

        rcint = bcp_done(w_hdbc1);
        if (rcint < 0)
            HandleErrorDBC(w_hdbc1);

        printf("Finished loading district table.\n");

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxdiscl");

    }

    return;
}

//=====
//
// Function   : Stock
//
//=====

void Stock()
{
    long      s_i_id;
    short     s_w_id;
    short     s_quantity;
    char      s_dist_01[S_DIST_LEN+1];
    char      s_dist_02[S_DIST_LEN+1];
    char      s_dist_03[S_DIST_LEN+1];
    char      s_dist_04[S_DIST_LEN+1];
    char      s_dist_05[S_DIST_LEN+1];
    char      s_dist_06[S_DIST_LEN+1];

```

```

    char      s_dist_07[S_DIST_LEN+1];
    char      s_dist_08[S_DIST_LEN+1];
    char      s_dist_09[S_DIST_LEN+1];
    char      s_dist_10[S_DIST_LEN+1];
    long      s_ytd;
    short     s_order_cnt;
    short     s_remote_cnt;
    char      s_data[S_DATA_LEN+1];
    short     len;
    char      name[20];
    long      time_start;
    RETCODE   rc;
    DBINT     rcint;
    char      bcphint[128];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxstkcl");

    sprintf(name, "%s..%s", aptr->database, "stock");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\stock.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0,
0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0,
0, 5);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(w_hdbc1);
0, 6); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
0, 7); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
0, 8); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
0, 9); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
0, 10); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
0, 11); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
0, 12); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
0, 13); rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
0, SQLINT4, 14); rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
NULL, 0, SQLINT2, 15); rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
NULL, 0, SQLINT2, 16); rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA,
if (rc != SUCCEEDED)
    HandleErrorDBC(w_hdbc1);
17); rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, S_DATA_LEN, NULL, 0, 0,
if (rc != SUCCEEDED)

```

```

        HandleErrorDBC(w_hdbc1);
s_ytd = s_order_cnt = s_remote_cnt = 0;
time_start = (TimeNow() / MILLI);
printf("...Loading stock table\n");
for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (short)aptr->starting_warehouse; s_w_id <=
aptr->num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);
        len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);
        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEEDED)
            HandleErrorDBC(w_hdbc1);
        stock_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1,
stock_rows_loaded, "stock", &time_start);
    }
}
rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);
printf("Finished loading stock table.\n");
SQLFreeStmt(w_hstmt1, SQL_DROP);
SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);
// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");
return;
}
//=====

```

```

//
// Function   : LoadCustomer
//
//=====
void LoadCustomer()
{
    LOADER_TIME_STRUCT    customer_time_start;
    LOADER_TIME_STRUCT    history_time_start;
    short                 w_id;
    short                 d_id;
    DWORD                 dwThreadID[MAX_CUSTOMER_THREADS];
    HANDLE                 hThread[MAX_CUSTOMER_THREADS];
    char                  name[20];
    RETCODE                rc;
    DBINT                  rcint;
    char                   bcphint[128];
    char                   cmd[256];
    // SQLRETURN            rc_1;
    // SQLSMALLINT          recnum, MsgLen;
    // SQLCHAR              SqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
    // SQLINTEGER           NativeError;

    // Seed with unique number
    seed(5);

    printf("Loading customer and history tables...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxcuscl");

    // Initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "customer");

    rc = bcp_init(c_hdbc1, name, NULL, "logs\\customer.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "history");

    rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    sprintf(bcphint, "tablock");
    rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);
}

```

```

customer_rows_loaded    = 0;
history_rows_loaded     = 0;

CustomerBufInit();

customer_time_start.time_start = (TimeNow() / MILLI);
history_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (short)aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id, w_id);

        // Start parallel loading threads here...

        // Start customer table thread
        printf("...Loading customer table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
0,
&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // Start History table thread
        printf("...Loading history table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
0,
&dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }
    }
}

```

```

    }

    WaitForSingleObject( hThread[0], INFINITE );
    WaitForSingleObject( hThread[1], INFINITE );

    if (CloseHandle(hThread[0]) == FALSE)
    {
        printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
    }

    if (CloseHandle(hThread[1]) == FALSE)
    {
        printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
    }

    }

}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxcuscl");

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID =
1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "isql -S%s -U%s -P%s -d%s -e -Q\"update customer set
c_first = 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" >
logs\\nurand_load.log",
        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database,
        LOADER_NURAND_C);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);

```

```

SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
// Function : CustomerBufInit
//=====

void CustomerBufInit()
{
    int i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount = (float) 0;

        // fix to avoid ODBC float to numeric conversion problem.
        // customer_buf[i].c_balance = 0;
        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment = 0;
        customer_buf[i].c_payment_cnt = 0;
        customer_buf[i].c_delivery_cnt = 0;

        strcpy(customer_buf[i].c_data,"");

        customer_buf[i].h_amount = 0;

        strcpy(customer_buf[i].h_data,"");
    }
}

//=====

```



```

//
// Function : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====
void CustomerBufLoad(int d_id, int w_id)
{
    long                i;
    CUSTOMER_SORT_STRUCT  c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

        MakeAlphaString(8,16,FIRST_NAME_LEN, c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
        d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {

        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;

        customer_buf[i].c_ytd_payment = 10.0;

        customer_buf[i].c_payment_cnt = 1;
        customer_buf[i].c_delivery_cnt = 0;

        // Generate CUSTOMER and HISTORY data

        customer_buf[i].c_id = c[i].c_id;

        strcpy(customer_buf[i].c_first, c[i].c_first);
        strcpy(customer_buf[i].c_last, c[i].c_last);

        customer_buf[i].c_middle[0] = 'O';
        customer_buf[i].c_middle[1] = 'E';

        MakeAddress(customer_buf[i].c_street_1,
                    customer_buf[i].c_street_2,
                    customer_buf[i].c_city,
                    customer_buf[i].c_state,
                    customer_buf[i].c_zip);

        MakeNumberString(16, 16, PHONE_LEN,
customer_buf[i].c_phone);

```

```

        if (RandomNumber(1L, 100L) > 10)
            customer_buf[i].c_credit[0] = 'G';
        else
            customer_buf[i].c_credit[0] = 'B';
        customer_buf[i].c_credit[1] = 'C';

        customer_buf[i].c_credit_lim = 50000.0;
        customer_buf[i].c_discount = ((float) RandomNumber(0L,
5000L)) / 10000.0;

        // fix to avoid ODBC float to numeric conversion problem.

        // customer_buf[i].c_balance = -10.0;
        strcpy(customer_buf[i].c_balance, "-10.0");

        MakeAlphaString(500, 500, C_DATA_LEN,
customer_buf[i].c_data);

        // Generate HISTORY data
        MakeAlphaString(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
    }
}

//=====
//
// Function : LoadCustomerTable
//
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    int                i;
    long                c_id;
    short               c_d_id;
    short               c_w_id;
    char                c_first[FIRST_NAME_LEN+1];
    char                c_middle[MIDDLE_NAME_LEN+1];
    char                c_last [LAST_NAME_LEN+1];
    char                c_street_1[ADDRESS_LEN+1];
    char                c_street_2[ADDRESS_LEN+1];
    char                c_city[ADDRESS_LEN+1];
    char                c_state[STATE_LEN+1];
    char                c_zip[ZIP_LEN+1];
    char                c_phone[PHONE_LEN+1];
    char                c_credit[CREDIT_LEN+1];
    double              c_credit_lim;
    double              c_discount;

    // fix to avoid ODBC float to numeric conversion problem.

    // double                c_balance;
    char                c_balance[6];

    double              c_ytd_payment;
    short               c_payment_cnt;
    short               c_delivery_cnt;
    char                c_data[C_DATA_LEN+1];
    char                c_since[C_SINCE_LEN+1];

```

```

        RETCODE      rc;

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 3);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0,
0, 4);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0,
0, 5);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0,
6);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0,
0, 7);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
8);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0,
9);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0,
10);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, 11);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0,
12);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

```

```

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, 13);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0,
14);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 15);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 16);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        // fix to avoid ODBC float to numeric conversion problem.

        // rc = bcp_bind(c_hdbc1, (BYTE *) &c_balance, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 17);
        // if (rc != SUCCEEDED)
        //     HandleErrorDBC(c_hdbc1);
        rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0,
SQLCHARACTER, 17);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 18);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 19);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 20);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500, NULL, 0, 0, 21);
        if (rc != SUCCEEDED)
            HandleErrorDBC(c_hdbc1);

        for (i = 0; i < customers_per_district; i++)
        {
            c_id = customer_buf[i].c_id;
            c_d_id = customer_buf[i].c_d_id;
            c_w_id = customer_buf[i].c_w_id;

            strcpy(c_first, customer_buf[i].c_first);

```

```

strcpy(c_middle, customer_buf[i].c_middle);
strcpy(c_last, customer_buf[i].c_last);
strcpy(c_street_1, customer_buf[i].c_street_1);
strcpy(c_street_2, customer_buf[i].c_street_2);
strcpy(c_city, customer_buf[i].c_city);
strcpy(c_state, customer_buf[i].c_state);
strcpy(c_zip, customer_buf[i].c_zip);
strcpy(c_phone, customer_buf[i].c_phone);
strcpy(c_credit, customer_buf[i].c_credit);

FormatDate(&c_since);

c_credit_lim = customer_buf[i].c_credit_lim;
c_discount = customer_buf[i].c_discount;

// fix to avoid ODBC float to numeric conversion problem.

// c_balance = customer_buf[i].c_balance;
strcpy(c_balance, customer_buf[i].c_balance);

c_ytd_payment = customer_buf[i].c_ytd_payment;
c_payment_cnt = customer_buf[i].c_payment_cnt;
c_delivery_cnt = customer_buf[i].c_delivery_cnt;

strcpy(c_data, customer_buf[i].c_data);

// Send data to server
rc = bcp_sendrow(c_hdbc1);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

customer_rows_loaded++;
CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
}

}

//=====
//
// Function : LoadHistoryTable
//
//=====

void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    int i;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

```

```

rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 4);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, 6);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 7);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;
    h_amount = customer_buf[i].h_amount;
    strcpy(h_data, customer_buf[i].h_data);

    FormatDate(&h_date);

    // send to server
    rc = bcp_sendrow(c_hdbc2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(c_hdbc2);

    history_rows_loaded++;
    CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
}

}

//=====
=====

```

```

//
// Function   : LoadOrders
//
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT    orders_time_start;
    LOADER_TIME_STRUCT    new_order_time_start;
    LOADER_TIME_STRUCT    order_line_time_start;
    short                  w_id;
short                    d_id;
    DWORD                  dwThreadID[MAX_ORDER_THREADS];
    HANDLE                 hThread[MAX_ORDER_THREADS];
    char                    name[20];
    RETCODE                 rc;
    char                    bcphint[128];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordcl");
        BuildIndex("idxnodcl");
        BuildIndex("idxodlcl");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "new_order");

    rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (no_w_id, no_d_id,
no_o_id), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
        rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)

```

```

        HandleErrorDBC(o_hdbc2);
    }

    sprintf(name, "%s..%s", aptr->database, "order_line");

    rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id,
ol_o_id, ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses *
300000));
        rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
    }

    orders_rows_loaded      = 0;
    new_order_rows_loaded  = 0;
    order_line_rows_loaded  = 0;

    OrdersBufInit();

    orders_time_start.time_start = (TimeNow() / MILLI);
    new_order_time_start.time_start = (TimeNow() / MILLI);
    order_line_time_start.time_start = (TimeNow() / MILLI);

    for (w_id = (short)aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
    {
        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {
            OrdersBufLoad(d_id, w_id);

            // start parallel loading threads here...

            // start Orders table thread
            printf("...Loading Order Table for: d_id = %d, w_id
= %d\n", d_id, w_id);

            hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrdersTable,
&orders_time_start,
0,
&dwThreadID[0]);

            if (hThread[0] == NULL)
            {
                printf("Error, failed in creating creating
thread = 0.\n");
                exit(-1);
            }

```

```

        // start NewOrder table thread
        printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);
        hThread[1] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadNewOrderTable,
&new_order_time_start,
                                0,
&dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        // start Order-Line table thread
        printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);
        hThread[2] = CreateThread(NULL,
                                0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
                                0,
&dwThreadID[2]);

        if (hThread[2] == NULL)
        {
            printf("Error, failed in creating creating
thread = 2.\n");
            exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );
        WaitForSingleObject( hThread[2], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
        }

        if (CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
        }

```

```

        if (CloseHandle(hThread[2]) == FALSE)
        {
            printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
        }
    }

    printf("Finished loading orders.\n");

    return;
}

//=====
//
// Function   : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//
//=====
void OrdersBufInit()
{
    int    i;
    int    j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o_ol_cnt = 0;
        orders_buf[i].o_all_local = 0;

        for (j=0;j<=14;j++)
        {
            orders_buf[i].o_ol[j].ol = 0;
            orders_buf[i].o_ol[j].ol_i_id = 0;
            orders_buf[i].o_ol[j].ol_supply_w_id = 0;
            orders_buf[i].o_ol[j].ol_quantity = 0;
            orders_buf[i].o_ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o_ol[j].ol_dist_info, "");
        }
    }
}

//=====
//
// Function   : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE

```

```

//
//=====
void OrdersBufLoad(int d_id, int w_id)
{
    int     cust[ORDERS_PER_DIST+1];
    long    o_id;
    short   ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    GetPermutation(cust, ORDERS_PER_DIST);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data

        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
        orders_buf[o_id].o_c_id = cust[o_id+1];
        orders_buf[o_id].o_ol_cnt = (short)RandomNumber(5L, 15L);

        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);
            orders_buf[o_id].o_all_local = 1;
        }
        else
        {
            orders_buf[o_id].o_carrier_id = 0;
            orders_buf[o_id].o_all_local = 1;
        }

        for (ol=0; ol<orders_buf[o_id].o_ol_cnt; ol++)
        {
            orders_buf[o_id].o_ol[ol].ol = ol+1;
            orders_buf[o_id].o_ol[ol].ol_i_id =
RandomNumber(1L, max_items);
            orders_buf[o_id].o_ol[ol].ol_supply_w_id = w_id;
            orders_buf[o_id].o_ol[ol].ol_quantity = 5;
            MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o_ol[ol].ol_dist_info);

            // Generate ORDER-LINE data
            if (o_id < first_new_order)
            {
                orders_buf[o_id].o_ol[ol].ol_amount = 0;
                // Added to insure ol_delivery_d set
properly during load

                FormatDate(&orders_buf[o_id].o_ol[ol].ol_delivery_d);
            }
        }
    }
}

```

```

else
{
    orders_buf[o_id].o_ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
    // Added to insure ol_delivery_d set
properly during load

    // odbc datetime format

    strcpy(orders_buf[o_id].o_ol[ol].ol_delivery_d,"1899-12-31
12:00:00.000");
}
}
}
}

//=====
//
// Function   : LoadOrdersTable
//
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int     i;
    long    o_id;
    short   o_d_id;
    short   o_w_id;
    long    o_c_id;
    short   o_carrier_id;
    short   o_ol_cnt;
    short   o_all_local;
    char    o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc;
    DBINT   rcint;

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
}

```

```

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN,
NULL, 0, SQLCHARACTER, 5);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 6);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 7);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);

for (i = 0; i < orders_per_district; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;
    o_c_id    = orders_buf[i].o_c_id;
    o_carrier_id = orders_buf[i].o_carrier_id;
    o_ol_cnt  = orders_buf[i].o_ol_cnt;
    o_all_local = orders_buf[i].o_all_local;

    FormatDate(&o_entry_d);

    // send data to server
    rc = bcp_sendrow(o_hdbc1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);

    orders_rows_loaded++;
    CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded,
"orders", &orders_time_start->time_start);
}

// rcint = bcp_batch(o_hdbc1);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc1);

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxordc1");
}

```

```

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxordnc");
}

}

//=====
//
// Function : LoadNewOrderTable
//
//=====

void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    int          i;
    long         o_id;
    short        o_d_id;
    short        o_w_id;
    RETCODE      rc;
    DBINT        rcint;

    // Bind NEW-ORDER data

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEEDED)
            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;
        CheckForCommit(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
    }

    // rcint = bcp_batch(o_hdbc2);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc2);

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))

```

```

    {
        rcint = bcp_done(o_hdbc2);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxnodcl");
    }
}

//=====
//
// Function   : LoadOrderLineTable
//
//=====

void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    int         i,j;
    long        o_id;
    short       o_d_id;
    short       o_w_id;
    long        ol;
    long        ol_i_id;
    short       ol_supply_w_id;
    short       ol_quantity;
    double      ol_amount;
    char        ol_dist_info[DIST_INFO_LEN+1];
    char        ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE     rc;
    DBINT       rcint;

    // bind ORDER-LINE data
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

```

```

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0,
OL_DELIVERY_D_LEN, NULL, 0, SQLCHARACTER, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL,
0, 0, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id      = orders_buf[i].o_id;
        o_d_id    = orders_buf[i].o_d_id;
        o_w_id    = orders_buf[i].o_w_id;

        for (j=0; j < orders_buf[i].o_ol_cnt; j++)
        {
            ol          = orders_buf[i].o_ol[j].ol;
            ol_i_id    = orders_buf[i].o_ol[j].ol_i_id;
            ol_supply_w_id =
orders_buf[i].o_ol[j].ol_supply_w_id;
            ol_quantity = orders_buf[i].o_ol[j].ol_quantity;
            ol_amount   = orders_buf[i].o_ol[j].ol_amount;

            strcpy(ol_delivery_d,orders_buf[i].o_ol[j].ol_delivery_d);

            strcpy(ol_dist_info,orders_buf[i].o_ol[j].ol_dist_info);

            rc = bcp_sendrow(o_hdbc3);
            if (rc != SUCCEED)
                HandleErrorDBC(o_hdbc3);

            order_line_rows_loaded++;
            CheckForCommit(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
        }
    }
}

```



```

}

// rcint = bcp_batch(o_hdbc3);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc3);

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc3);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc3);

    SQLFreeStmt(o_hstmt3, SQL_DROP);
    SQLDisconnect(o_hdbc3);
    SQLFreeConnect(o_hdbc3);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxodlcl1");
}
}

//=====
//
// Function   : GetPermutation
//
//=====

void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
//
// Function   : CheckForCommit
//
//=====

void CheckForCommit(HDBC hdbc,
                   HSTMT hstmt,
                   int rows_loaded,
                   char *table_name,

```

```

long *time_start)
{
    long    time_end, time_diff;
    // DBINT    rcint;

    if ( !(rows_loaded % aptr->batch) )
    {
        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d
(%d rows)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff
: 1L));

        *time_start = time_end;
    }

    return;
}

//=====
//
// Function   : OpenConnections
//
//=====

void OpenConnections()
{
    RETCODE    rc;

    char        szDriverString[300];
    char        szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0
);

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

```

```

        SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
        SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

        // Open connections to SQL Server

        // Connection 1

        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                aptr->server,
                aptr->user,
                aptr->password,
                aptr->database );

        rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        rc = SQLDriverConnect ( i_hdbc1,
                                NULL,
                                (SQLCHAR*)&szDriverString[0]
                                ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0] ,
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT );

        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        // Connection 2

        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                aptr->server,
                aptr->user,
                aptr->password,
                aptr->database );

        rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = SQLDriverConnect ( w_hdbc1,

```

```

                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0] ,
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT
                                );
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        // Connection 3

        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                aptr->server,
                aptr->user,
                aptr->password,
                aptr->database );

        rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        rc = SQLDriverConnect ( c_hdbc1,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0] ,
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT
                                );
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        // Connection 4

        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                aptr->server,
                aptr->user,
                aptr->password,
                aptr->database );

        rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr-
>pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        rc = SQLDriverConnect ( c_hdbc2,
                                NULL,

```

```

        (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
        (SQLCHAR*)&szDriverStringOut[0] ,
        sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT
);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    // Connection 5
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

    rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = SQLDriverConnect ( o_hdbc1,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0] ,
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT
);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    // Connection 6
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

    rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = SQLDriverConnect ( o_hdbc2,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,

```

```

                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0] ,
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT
);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    // Connection 7
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->database );

    rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = SQLDriverConnect ( o_hdbc3,
                                NULL,
                                (SQLCHAR*)&szDriverString[0] ,
                                SQL_NTS,
                                (SQLCHAR*)&szDriverStringOut[0] ,
                                sizeof(szDriverStringOut),
                                &cbDriverStringOut,
                                SQL_DRIVER_NOPROMPT
);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

//=====
//
// Function name: BuildIndex
//
//=====
void BuildIndex(char *index_script)
{
    char cmd[256];

    printf("Starting index creation: %s\n",index_script);

    sprintf(cmd, "isql -S%s -U%s -P%s -e -i%s\\%s.sql > logs\\%s.log",
                                aptr->server,
                                aptr->user,
                                aptr->password,
                                aptr->index_script_path,
                                index_script,

```

```

                index_script);

    system(cmd);

    printf("Finished index creation:  %s\n",index_script);
}

void HandleErrorDBC (SQLHDBC  hdbc1)
{
    SQLCHAR          SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER  NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN  rc2;
    char       timebuf[128];
    char       datebuf[128];
    FILE       *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
&NativeError,
                Msg, sizeof(Msg) , &MsgLen )) !=
SQL_NO_DATA )
    {

        sprintf( szLastError , "%s" , Msg );

        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR:  Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\n" , datebuf, timebuf,
szLastError);
            fclose(fp1);
        }

        i++;
    }
}

void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

```

```

// odbc datetime format
strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000", &when );

return;

```

```

}

```

# Appendix C - Tunable Parameters

## Microsoft SQL Server Startup Parameters

```
C:\MSSQL\BINN\SQLSERVR.EXE -c -x -t3502
```

Where:

- -c Start SQL Server independently of the Service Control Manager
- -x Disables the keeping of CPU time and cache hit ratio statistics
- -t3502 Writes a message to the SQL Server Errorlog showing the beginning and ending time of each checkpoint

## SQL Server Stack Size

The default stack size for Microsoft SQL Server 7.0 was changed using the EDITBIN utility. The EDITBIN utility ships with Microsoft Visual C++ V4.0. The command used to change the stack size is:

```
editbin /S: 131072 sqlservr.exe
```

This command is fully documented as an article in the Microsoft Knowledge Base on the Microsoft Web Site at [www.microsoft.com/support](http://www.microsoft.com/support).

## BOOT.INI

The /3gb switch was added to the boot.ini file to cause Windows NT Enterprise Edition to allow 3GB of user and 1GB of kernel virtual address space, rather than the usual 2GB of virtual address space for each.

## Microsoft SQL Server Configuration Parameters

```
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11>
```

4494 1771-000

```
-- File:      VERSION.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Returns SQL Server version string

print " "
select convert(char(30), getdate(),9)
print " "

-----
Sep 21 1998 11:14:01:730AM

(1 row affected)

1> 2> 3>
select @@version

-----
-----
-----
-----
-----
Microsoft SQL Server 7.00 - 7.00.549 (Intel X86)
Aug 18 1998 15:05:22
Cop
yright (c) 1988-1998 Microsoft Corporation
Enterprise Edition on Windo
ws NT 4.0 (Build 1381: Service Pack 4, RC 1.99)

(1 row affected)
1> 2>
1> 2> 3> 4> 5> 6> 7> 8> 9> 10>
-- File:      CONFIG.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Collects SQL Server configuration parameters

print " "
select convert(char(30), getdate(),9)
```

print " "

-----  
Sep 21 1998 11:14:03:590AM

(1 row affected)

1> 2> 3> DBCC execution completed. If DBCC printed error messages, contact your system administrator.  
Configuration option changed. Run the RECONFIGURE statement to install.

sp\_configure "show advanced",1  
1> 2> reconfigure with override  
1> 2> sp\_configure

| name                           | minimum    | maximum    | config_value | run_value  |
|--------------------------------|------------|------------|--------------|------------|
| -----                          |            |            |              |            |
| affinity mask                  |            |            |              |            |
| 0                              | 2147483647 |            | 15           | 15         |
| allow updates                  |            |            |              |            |
| 0                              | 1          |            | 0            | 0          |
| cost threshold for parallelism |            |            |              |            |
| 0                              |            | 32767      | 5            | 5          |
| cursor threshold               |            |            |              |            |
| -1                             | 2147483647 |            | -1           | -1         |
| default language               |            |            |              |            |
| 0                              |            | 9999       | 0            | 0          |
| default sortorder id           |            |            |              |            |
| 0                              |            | 255        | 50           | 50         |
| extended memory size (MB)      |            |            |              |            |
| 0                              | 2147483647 |            | 0            | 0          |
| fill factor (%)                |            |            |              |            |
| 0                              |            | 100        | 0            | 0          |
| index create memory (KB)       |            |            |              |            |
| 704                            |            | 1600000    | 0            | 0          |
| language in cache              |            |            |              |            |
| 3                              |            | 100        | 3            | 3          |
| lightweight pooling            |            |            |              |            |
| 0                              |            | 1          | 1            | 1          |
| locks                          |            |            |              |            |
| 5000                           | 2147483647 |            | 10000        | 10000      |
| max async IO                   |            |            |              |            |
| 1                              |            | 255        | 255          | 255        |
| max degree of parallelism      |            |            |              |            |
| 0                              |            | 32         | 1            | 1          |
| max server memory (MB)         |            |            |              |            |
| 4                              | 2147483647 | 2147483647 | 2147483647   | 2147483647 |
| max text repl size (B)         |            |            |              |            |
| 0                              | 2147483647 |            | 65536        | 65536      |
| max worker threads             |            |            |              |            |
| 10                             |            | 1024       | 225          | 225        |
| media retention                |            |            |              |            |
| 0                              |            | 365        | 0            | 0          |
| min memory per query (KB)      |            |            |              |            |
| 512                            | 2147483647 |            | 512          | 512        |
| min server memory (MB)         |            |            |              |            |
| 0                              | 2147483647 |            | 2560         | 2560       |

|                           |            |       |       |
|---------------------------|------------|-------|-------|
| nested triggers           |            |       |       |
| 0                         |            | 1     | 0     |
| network packet size (B)   |            |       |       |
| 512                       |            | 65535 | 4096  |
| open objects              |            |       |       |
| 0                         | 2147483647 |       | 0     |
| priority boost            |            |       |       |
| 0                         |            | 1     | 1     |
| query governor cost limit |            |       |       |
| 0                         | 2147483647 |       | 0     |
| query wait (s)            |            |       |       |
| -1                        | 2147483647 |       | -1    |
| recovery interval (min)   |            |       |       |
| 0                         |            | 32767 | 32767 |
| remote access             |            |       |       |
| 0                         |            | 1     | 0     |
| remote login timeout (s)  |            |       |       |
| 0                         | 2147483647 |       | 30    |
| remote proc trans         |            |       |       |
| 0                         |            | 1     | 0     |
| remote query timeout (s)  |            |       |       |
| 0                         | 2147483647 |       | 0     |
| resource timeout (s)      |            |       |       |
| 5                         | 2147483647 |       | 10    |
| scan for startup procs    |            |       |       |
| 0                         |            | 1     | 0     |
| set working set size      |            |       |       |
| 0                         |            | 1     | 0     |
| show advanced options     |            |       |       |
| 0                         |            | 1     | 1     |
| spin counter              |            |       |       |
| 1                         | 2147483647 |       | 10000 |
| time slice (ms)           |            |       |       |
| 50                        |            | 1000  | 100   |
| Unicode comparison style  |            |       |       |
| 0                         | 2147483647 |       | 0     |
| Unicode locale id         |            |       |       |
| 0                         | 2147483647 |       | 33280 |
| user connections          |            |       |       |
| 0                         |            | 32767 | 300   |
| user options              |            |       |       |
| 0                         |            | 4095  | 0     |

1>

### Internal RAID Configuration Parameters

```
*****
*           MYLEX Disk Array Controller - Configuration Utility
*
*           Version 4.76
*****
```

CONFIGURATION INFORMATION OF :  
=====

3 Channel - 15 Target DAC960PJ #1 Firmware version 4.03

PHYSICAL PACK INFORMATION :  
=====

Number of Packs = 4

Pack 0 : [0:0] [1:0] [0:1] [1:1] [0:2] [1:2] [0:3]  
Pack 1 : [1:3] [0:4] [1:4] [0:5] [1:5] [0:6] [1:6]  
Pack 2 : [0:8] [1:8] [0:9] [1:9] [0:10] [1:10] [0:11]  
Pack 3 : [1:11] [0:12] [1:12] [0:13] [1:13] [0:14] [1:14]

SYSTEM DRIVE INFORMATION :  
=====

Number of System Drives = 1

| Sys Drv # | Phy. Size | Raid Level | Eff. Size | Write Policy |
|-----------|-----------|------------|-----------|--------------|
| 0         | 182308 MB | 0          | 182308 MB | Write Thru   |

```

*****
*           MYLEX Disk Array Controller - Configuration Utility
*
*                                     Version 4.76
*
*****

```

CONFIGURATION INFORMATION OF :  
=====

3 Channel - 15 Target DAC960PJ #2 Firmware version 4.03

PHYSICAL PACK INFORMATION :  
=====

Number of Packs = 4

Pack 0 : [0:0] [1:0] [0:1] [1:1] [0:2] [1:2] [0:3]  
Pack 1 : [1:3] [0:4] [1:4] [0:5] [1:5] [0:6] [1:6]  
Pack 2 : [0:8] [1:8] [0:9] [1:9] [0:10] [1:10] [0:11]  
Pack 3 : [1:11] [0:12] [1:12] [0:13] [1:13] [0:14] [1:14]  
Pack 4 : [2:0] [2:1] [2:2] [2:3] [2:4] [2:5] [2:6] [2:8]

SYSTEM DRIVE INFORMATION :  
=====

Number of System Drives = 1

| Sys Drv # | Phy. Size | Raid Level | Eff. Size | Write Policy |
|-----------|-----------|------------|-----------|--------------|
|-----------|-----------|------------|-----------|--------------|

| 0 | 151900 MB | 0 | 151900 MB | Write Thru |  |
|---|-----------|---|-----------|------------|--|
| 1 | 69464 MB  | 5 | 60781 MB  | Write Back |  |

```

*****
*           MYLEX Disk Array Controller - Configuration Utility
*
*                                     Version 4.76
*
*****

```

CONFIGURATION INFORMATION OF :  
=====

3 Channel - 15 Target DAC960PJ #3 Firmware version 4.03

PHYSICAL PACK INFORMATION :  
=====

Number of Packs = 4

Pack 0 : [0:0] [1:0] [0:1] [1:1] [0:2] [1:2] [0:3]  
Pack 1 : [1:3] [0:4] [1:4] [0:5] [1:5] [0:6] [1:6]  
Pack 2 : [0:8] [1:8] [0:9] [1:9] [0:10] [1:10] [0:11]  
Pack 3 : [1:11] [0:12] [1:12] [0:13] [1:13] [0:14] [1:14]  
Pack 4 : [2:0] [2:1] [2:2] [2:3] [2:4] [2:5] [2:6] [2:8]

SYSTEM DRIVE INFORMATION :  
=====

Number of System Drives = 1

| Sys Drv # | Phy. Size | Raid Level | Eff. Size | Write Policy |
|-----------|-----------|------------|-----------|--------------|
| 0         | 182308 MB | 0          | 182308 MB | Write Thru   |
| 1         | 69464 MB  | 5          | 60781 MB  | Write Back   |

```

*****
*           MYLEX Disk Array Controller - Configuration Utility
*
*                                     Version 4.76
*
*****

```

CONFIGURATION INFORMATION OF :  
=====

3 Channel - 15 Target DAC960PJ #4 Firmware version 4.03

PHYSICAL PACK INFORMATION :

```

=====
Number of Packs = 1
Pack 0 : [0:0] [1:0]

SYSTEM DRIVE INFORMATION :
=====
Number of System Drives = 1

Sys Drv #   Phy. Size   Raid Level   Eff. Size   Write Policy
=====
0           104194 MB     1            52097 MB    Write Thru

*****
*           MYLEX Disk Array Controller - Configuration Utility
*
*                                     Version 4.76
*
*****

CONFIGURATION INFORMATION OF :
=====

3 Channel - 15 Target  DAC960PJ  #5    Firmware version 4.03

PHYSICAL PACK INFORMATION :
=====

Number of Packs = 4

Pack 0 : [0:0] [1:0] [0:1] [1:1] [0:2] [1:2] [0:3]
Pack 1 : [1:3] [0:4] [1:4] [0:5] [1:5] [0:6] [1:6]
Pack 2 : [0:8] [1:8] [0:9] [1:9] [0:10] [1:10] [0:11]
Pack 3 : [1:11] [0:12] [1:12] [0:13] [1:13] [0:14] [1:14]

SYSTEM DRIVE INFORMATION :
=====

Number of System Drives = 1

Sys Drv #   Phy. Size   Raid Level   Eff. Size   Write Policy
=====
0           182308 MB     0            182308 MB    Write Thru

*****
*           MYLEX Disk Array Controller - Configuration Utility
*
*                                     Version 4.76
*
*****

```

```

*****
CONFIGURATION INFORMATION OF :
=====

3 Channel - 15 Target  DAC960PJ  #6    Firmware version 4.03

PHYSICAL PACK INFORMATION :
=====

Number of Packs = 4

Pack 0 : [0:0] [1:0] [0:1] [1:1] [0:2] [1:2] [0:3]
Pack 1 : [1:3] [0:4] [1:4] [0:5] [1:5] [0:6] [1:6]
Pack 2 : [0:8] [1:8] [0:9] [1:9] [0:10] [1:10] [0:11]
Pack 3 : [1:11] [0:12] [1:12] [0:13] [1:13] [0:14] [1:14]

SYSTEM DRIVE INFORMATION :
=====

Number of System Drives = 1

Sys Drv #   Phy. Size   Raid Level   Eff. Size   Write Policy
=====
0           151900 MB     0            151900 MB    Write Thru

*****
*           MYLEX Disk Array Controller - Configuration Utility
*
*                                     Version 4.76
*
*****

CONFIGURATION INFORMATION OF :
=====

3 Channel - 15 Target  DAC960PJ  #7    Firmware version 4.03

PHYSICAL PACK INFORMATION :
=====

Number of Packs = 4

Pack 0 : [0:0] [1:0] [0:1] [1:1] [0:2] [1:2] [0:3]
Pack 1 : [1:3] [0:4] [1:4] [0:5] [1:5] [0:6] [1:6]
Pack 2 : [0:8] [1:8] [0:9] [1:9] [0:10] [1:10] [0:11]
Pack 3 : [1:11] [0:12] [1:12] [0:13] [1:13] [0:14] [1:14]

SYSTEM DRIVE INFORMATION :
=====

Number of System Drives = 1

```



```

Sys Drv #   Phy. Size   Raid Level   Eff. Size   Write Policy
=====
0           182308 MB    0            182308 MB   Write Thru

```

```

*****
*           MYLEX Disk Array Controller - Configuration Utility
*
*           Version 4.76
*
*****

```

```

CONFIGURATION INFORMATION OF :
=====
3 Channel - 15 Target DAC960PJ #8 Firmware version 4.03

```

```

PHYSICAL PACK INFORMATION :
=====
Number of Packs = 4

Pack 0 : [0:0] [1:0] [0:1] [1:1] [0:2] [1:2] [0:3]
Pack 1 : [1:3] [0:4] [1:4] [0:5] [1:5] [0:6] [1:6]
Pack 2 : [0:8] [1:8] [0:9] [1:9] [0:10] [1:10] [0:11]
Pack 3 : [1:11] [0:12] [1:12] [0:13] [1:13] [0:14] [1:14]

```

```

SYSTEM DRIVE INFORMATION :
=====
Number of System Drives = 1

Sys Drv #   Phy. Size   Raid Level   Eff. Size   Write Policy
=====
0           182308 MB    0            182308 MB   Write Thru

```

## External RAID Configuration Parameters

```

*****
*           Unisys Ultra-Wide RAID Controller OSM1000-C32
*
*****

```

CPU type: 5x86-133 (WB)

Firmware version 1.31G  
 Bootcode version 1.12B

```

Total cache: 32 MB
- Cache      Write Back:      enabled
              optimization:   sequential (128K stripe size)
- Raid       Rebuild Priority: low
              Write Priority  on Initialization: disabled
                              on Rebuild:           disabled
                              on Normal:           disabled

```

```

Logical Volume Partition table
Volume ID1      Capacity 52098 MB RAID 0 # drives: 6

```

```

Host LUN Assignment
SCSI Chl      LUN      LVIDx  PortIdx  Capacity
0             0        0      0        52098 MB

```

```

Physical Drives
Id      Slot  Chl  Id  Capacity  Status  XferRate  Vendor/Product
-----
00640ST19101W  0      0      0  8683 MB  online  41.7 MB  UNISYS
00640ST19101W  0      1      0  8683 MB  online  41.7 MB  UNISYS
00640ST19101W  0      2      0  8683 MB  online  41.7 MB  UNISYS
00640ST19101W  0      3      0  8683 MB  online  41.7 MB  UNISYS
00640ST19101W  0      4      0  8683 MB  online  41.7 MB  UNISYS
00640ST19101W  0      5      0  8683 MB  online  41.7 MB  UNISYS

```

## Configuration of Log Drives

A single Mylex DAC960PJ RAID controller was used in the SUT for the mirrored log drives. Half of the drives were in one disk cage connected to one channel of the controller and half were in a second disk cage connected to a second channel of the controller. The controller implemented the RAID 1 mirroring across the two channels. Write caching was disabled on both the controller and on all the physical drives themselves.

One IFT 3001 SCSI-to-SCSI RAID controller was used in each of the two log disk cages. Each of these controllers implemented RAID 0 striping on the six 9GB drives that were in each disk cage, so that the Mylex controller in the SUT saw just two large 'disks'. Each of the IFT controllers had a 32MB cache. Configuration options were set

for Write Back caching and Optimized for Sequential IO. The IFT controllers used an algorithm that ensured that cached write data was held for no more than a fraction of a minute before being written to the physical drives.

For the priced configuration, each of the disk cages contained two redundant power supplies. Only one was required to be functional to keep the ITF controller and disk drives operational. A UPS was priced to provide power to one power supply in each disk cage. The second power supply in each disk cage was connected to normal wall power. Thus neither interruption of power or failure of the UPS would affect the two log disk cages (or their IFT controllers and disks). Since the two disk cages were completely independent of each other, this configuration ensured that there was no single point of failure in writing to the log.

## NT Server Configuration Information

Microsoft Diagnostics Report For \\AVALON4

### OS Version Report

Microsoft (R) Windows NT (TM) Server  
Version 4.0 (Build 1381: Service Pack 4, RC 1.99) x86 Multiprocessor Free  
Registered Owner: SAM&M, Unisys Corporation  
Product Number: 70234-810-6895975-67328

### System Report

System: AT/AT COMPATIBLE  
Hardware Abstraction Layer: MPS 1.4 - APIC platform  
BIOS Date: 08/15/98  
BIOS Version: AC450NX - PhoenixBIOS 4.0 Releas

### Processor list:

0: x86 Family 6 Model 5 Stepping 2 GenuineIntel ~400 Mhz  
1: x86 Family 6 Model 5 Stepping 2 GenuineIntel ~400 Mhz  
2: x86 Family 6 Model 5 Stepping 2 GenuineIntel ~400 Mhz  
3: x86 Family 6 Model 5 Stepping 2 GenuineIntel ~400 Mhz

### Video Display Report

BIOS Date: 05/22/96  
BIOS Version: CL-GD5436/46 PCI VGA BIOS Version 1.25

Adapter:

Setting: 1024 x 768 x 65536  
75 Hz

Type: cirrus compatible display adapter  
String: Cirrus Logic Compatible  
Memory: 2 MB  
Chip Type: Cirrus Logic 5446  
DAC Type: Integrated RAMDAC

### Driver:

Vendor: Microsoft Corporation  
File(s): cirrus.sys, vga.dll, cirrus.dll, vga256.dll, vga64K.dll  
Version: 4.00, 4.0.0

### Drives Report

C:\ (Local - FAT) SYSTEM Total: 2,096,160KB, Free: 1,044,384KB  
Serial Number: F035 - 8AA4  
Bytes per cluster: 512  
Sectors per cluster: 64  
Filename length: 255  
T:\ (Local - NTFS) BACK1 Total: 62,239,724KB, Free: 2,720,888KB  
Serial Number: 8463 - 2E33  
Bytes per cluster: 512  
Sectors per cluster: 8  
Filename length: 255  
U:\ (Local - NTFS) BACK2 Total: 62,239,724KB, Free: 2,488,104KB  
Serial Number: FC70 - 54DE  
Bytes per cluster: 512  
Sectors per cluster: 8  
Filename length: 255  
Z:\ (Local - NTFS) testfiles Total: 2,345,488KB, Free: 904,624KB  
Serial Number: B0C5 - 33C8  
Bytes per cluster: 512  
Sectors per cluster: 8  
Filename length: 255

### Memory Report

Handles: 2,520  
Threads: 108  
Processes: 16

### Physical Memory (K)

Total: 4,128,168  
Available: 888,704  
File Cache: 12,296

### Kernel Memory (K)

Total: 14,996  
Paged: 8,884  
Nonpaged: 6,112

### Commit Charge (K)

Total: 3,084,832  
Limit: 4,240,620  
Peak: 3,094,016

Pagefile Space (K)

Total: 273,408  
 Total in use: 7,172  
 Peak: 7,804

C:\pagefile.sys  
 Total: 273,408  
 Total in use: 7,172  
 Peak: 7,804

Services Report

```
-----
Alerter                               Stopped   (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
Computer Browser                       Stopped   (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
    LanmanServer
    LmHosts
ClipBook Server                        Stopped   (Manual)
  C:\WINNT\system32\clipsrv.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
    NetDDE
DHCP Client (TDI)                     Stopped   (Disabled)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    Tcpip
    Afd
    NetBT
EventLog (Event log)                  Running   (Automatic)
  C:\WINNT\system32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Server                                 Running   (Automatic)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Group Dependencies:
    TDI
Workstation (NetworkProvider)          Running   (Automatic)
```

```
C:\WINNT\System32\services.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Shared Process
Group Dependencies:
  TDI
License Logging Service                Stopped   (Manual)
  C:\WINNT\System32\llssrv.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
TCP/IP NetBIOS Helper                 Stopped   (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Group Dependencies:
    NetworkProvider
Messenger                              Stopped   (Manual)
  C:\WINNT\System32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
    NetBios
MSDTC (MS Transactions)               Stopped   (Manual)
  C:\WINNT\System32\msdtc.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
    RPCSS
    NTLMSSP
MSSQLServer                           Stopped   (Manual)
  C:\MSSQL7\bin\sqlservr.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Network DDE (NetDDEGroup)             Stopped   (Manual)
  C:\WINNT\system32\netdde.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    NetDDEDSDM
Network DDE DSDM                      Stopped   (Manual)
  C:\WINNT\system32\netdde.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Net Logon (RemoteValidation)           Stopped   (Manual)
  C:\WINNT\System32\lsass.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
```

```

LmHosts
NT LM Security Support Provider          Running   (Manual)
  C:\WINNT\System32\SERVICES.EXE
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Plug and Play (PlugPlay)                 Stopped   (Manual)
  C:\WINNT\system32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Protected Storage                         Running   (Automatic)
  C:\WINNT\System32\pstores.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process, Interactive
  Service Dependencies:
  RpcSs
Directory Replicator                     Stopped   (Manual)
  C:\WINNT\System32\lmrepl.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
  LanmanWorkstation
  LanmanServer
Remote Procedure Call (RPC) Locator       Stopped   (Manual)
  C:\WINNT\System32\LOCATOR.EXE
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
  LanmanWorkstation
Rdr                                       Running   (Automatic)
  C:\WINNT\system32\RpcSs.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Schedule                                  Stopped   (Manual)
  C:\WINNT\System32\AtSvc.Exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
SNMP                                       Stopped   (Disabled)
  C:\WINNT\System32\snmp.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
  Tcpip
  EventLog
SNMP Trap Service                         Stopped   (Disabled)
  C:\WINNT\System32\snmptrap.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:

```

```

Tcpip
EventLog
Spooler (SpoolerGroup)                   Stopped   (Manual)
  C:\WINNT\system32\spoolss.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process, Interactive
SQLServerAgent                           Stopped   (Manual)
  C:\MSSQL7\bin\sqlagent.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
  MSSQLServer
Telephony Service                         Stopped   (Manual)
  C:\WINNT\system32\tapisrv.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
UPS                                        Stopped   (Manual)
  C:\WINNT\System32\ups.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process

Drivers Report
-----
Abiosdsk (Primary disk)                   Stopped   (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
AFD Networking Support Environment (TDI)   Running   (Automatic)
  C:\WINNT\System32\drivers\afd.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Aha154x (SCSI miniport)                   Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Aha174x (SCSI miniport)                   Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
aic78xx (SCSI miniport)                   Running   (Boot)
  C:\WINNT\System32\DRIVERS\aic78xx.sys
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Always (SCSI miniport)                    Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
ami0nt (SCSI miniport)                    Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
amsint (SCSI miniport)                    Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process
Arrow (SCSI miniport)                      Stopped   (Disabled)
  Error Severity: Normal
  Service Flags: Kernel Driver, Shared Process

```

atapi (SCSI miniport) Running (Boot)  
 C:\WINNT\System32\DRIVERS\atapi.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Atdisk (Primary disk) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 ati (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Beep (Base) Running (System)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 BusLogic (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Busmouse (Pointer Port) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Cdaudio (Filter) Stopped (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Cdifs (File system) Running (Disabled)  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Group Dependencies:  
 SCSI CDROM Class  
 Cdrom (SCSI CDROM Class) Running (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
 SCSI miniport  
 Changer (Filter) Stopped (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 cirrus (Video) Running (System)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Cpqarray (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 cpqfw2e (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 dac960nt (SCSI miniport) Running (Boot)  
 C:\WINNT\System32\drivers\dac960nt.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 dce376nt (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Delldsa (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Dell\_DGX (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Disk (SCSI Class) Running (Boot)

Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
 SCSI miniport  
 Diskperf (Filter) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 DptScsi (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 dtc329x (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Intel(R) PRO NDIS Driver (NDIS) Running (Automatic)  
 C:\WINNT\System32\drivers\E100BNT.SYS  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 em (Base) Running (System)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 et4000 (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Fastfat (Boot file system) Running (Disabled)  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Fd16\_700 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Fd7000ex (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Fd8xx (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 flashpnt (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Floppy (Primary disk) Running (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Ftdisk (Filter) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 i8042 Keyboard and PS/2 Mouse Port Driver (Keyboard Port) Running (System)  
 System32\DRIVERS\i8042prt.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Inport (Pointer Port) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Jazzg300 (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Jazzg364 (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process

|   |         |             |  |
|---|---------|-------------|--|
| Jzvx1484 (Video)                                  | Stopped | (Disabled)  | Service Flags: Kernel Driver, Shared Process         |
| Error Severity: Ignore                            |         |             | Microsoft NDIS System Driver (NDIS) Running (System) |
| Service Flags: Kernel Driver, Shared Process      |         |             | Error Severity: Normal                               |
| Keyboard Class Driver (Keyboard Class)            | Running | (System)    | Service Flags: Kernel Driver, Shared Process         |
| System32\DRIVERS\kbdclass.sys                     |         |             | NetBIOS Interface (NetBIOSGroup) Stopped (Manual)    |
| Error Severity: Normal                            |         |             | C:\WINNT\System32\drivers\netbios.sys                |
| Service Flags: Kernel Driver, Shared Process      |         |             | Error Severity: Normal                               |
| KSecDD (Base)                                     | Running | (System)    | Service Flags: File System Driver, Shared Process    |
| Error Severity: Normal                            |         |             | Group Dependencies:                                  |
| Service Flags: Kernel Driver, Shared Process      |         |             | TDI  |
| macdisk (Filter)                                  | Running | (Boot)      | WINS Client (TCP/IP) (PNP_TDI) Stopped (Automatic)   |
| C:\WINNT\System32\drivers\macdisk.sys             |         |             | C:\WINNT\System32\drivers\netbt.sys                  |
| Error Severity: Normal                            |         |             | Error Severity: Normal                               |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process         |
| mga (Video)                                       | Stopped | (Disabled)  | Service Dependencies:                                |
| Error Severity: Ignore                            |         |             | Tcpip  |
| Service Flags: Kernel Driver, Shared Process      |         |             | NetDetect Stopped (Manual)                           |
| mga_mil (Video)                                   | Stopped | (Disabled)  | C:\WINNT\system32\drivers\netdect.sys                |
| Error Severity: Ignore                            |         |             | Error Severity: Normal                               |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process         |
| mitsumi (SCSI miniport)                           | Stopped | (Disabled)  | Npfs (File system) Running (System)                  |
| Error Severity: Normal                            |         |             | Error Severity: Normal                               |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: File System Driver, Shared Process    |
| mkecr5xx (SCSI miniport)                          | Stopped | (Disabled)  | Ntfs (File system) Running (Disabled)                |
| Error Severity: Normal                            |         |             | Error Severity: Normal                               |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: File System Driver, Shared Process    |
| Modem (Extended base)                             | Stopped | (Manual)    | Null (Base) Running (System)                         |
| Error Severity: Ignore                            |         |             | Error Severity: Normal                               |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process         |
| Mouse Class Driver (Pointer Class)                | Running | (System)    | Oliscsi (SCSI miniport) Stopped (Disabled)           |
| System32\DRIVERS\mouclass.sys                     |         |             | Error Severity: Normal                               |
| Error Severity: Normal                            |         |             | Service Flags: Kernel Driver, Shared Process         |
| Service Flags: Kernel Driver, Shared Process      |         |             | Parallel (Extended base) Running (Automatic)         |
| mraid35x (Primary disk)                           | Stopped | (Disabled)  | Error Severity: Ignore                               |
| Error Severity: Ignore                            |         |             | Service Flags: Kernel Driver, Shared Process         |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Dependencies:                                |
| Mfs (File system)                                 | Running | (System)    | Parport  |
| Error Severity: Normal                            |         |             | Group Dependencies:                                  |
| Service Flags: File System Driver, Shared Process |         |             | Parallel arbitrator                                  |
| Mup (Network)                                     | Running | (Manual)    | Parport (Parallel arbitrator) Running (Automatic)    |
| C:\WINNT\System32\drivers\mup.sys                 |         |             | Error Severity: Ignore                               |
| Error Severity: Normal                            |         |             | Service Flags: Kernel Driver, Shared Process         |
| Service Flags: File System Driver, Shared Process |         |             | ParVdm (Extended base) Running (Automatic)           |
| NetBEUI Protocol (PNP_TDI)                        | Running | (Automatic) | Error Severity: Ignore                               |
| C:\WINNT\System32\drivers\nbf.sys                 |         |             | Service Flags: Kernel Driver, Shared Process         |
| Error Severity: Normal                            |         |             | Service Dependencies:                                |
| Service Flags: Kernel Driver, Shared Process      |         |             | Parport  |
| Ncr53c9x (SCSI miniport)                          | Stopped | (Disabled)  | Group Dependencies:                                  |
| Error Severity: Normal                            |         |             | Parallel arbitrator                                  |
| Service Flags: Kernel Driver, Shared Process      |         |             | PCIDump (PCI Configuration) Stopped (System)         |
| ncr77c22 (Video)                                  | Stopped | (Disabled)  | Error Severity: Ignore                               |
| Error Severity: Ignore                            |         |             | Service Flags: Kernel Driver, Shared Process         |
| Service Flags: Kernel Driver, Shared Process      |         |             | Pcmcia (System Bus Extender) Stopped (Disabled)      |
| Ncrc700 (SCSI miniport)                           | Stopped | (Disabled)  | Error Severity: Normal                               |
| Error Severity: Normal                            |         |             | Service Flags: Kernel Driver, Shared Process         |
| Service Flags: Kernel Driver, Shared Process      |         |             | PnP ISA Enabler Driver (Base) Stopped (System)       |
| Ncrc710 (SCSI miniport)                           | Stopped | (Disabled)  | Error Severity: Ignore                               |
| Error Severity: Normal                            |         |             | Service Flags: Kernel Driver, Shared Process         |

|   |         |             |  |         |             |
|---|---------|-------------|--|---------|-------------|
| PortFltr (port)                                   | Stopped | (Manual)    | symc810 (SCSI miniport)                      | Stopped | (Disabled)  |
| Error Severity: Normal                            |         |             | Error Severity: Normal                       |         |             |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Group Dependencies:                               |         |             | Sysdrv (Extended Base)                       | Running | (Automatic) |
| SCSI miniport                                     |         |             | Error Severity: Normal                       |         |             |
| psidisp (Video)                                   | Stopped | (Disabled)  | Service Flags: Kernel Driver, Shared Process |         |             |
| Error Severity: Ignore                            |         |             | T128 (SCSI miniport)                         | Stopped | (Disabled)  |
| Service Flags: Kernel Driver, Shared Process      |         |             | Error Severity: Normal                       |         |             |
| Ql10wnt (SCSI miniport)                           | Stopped | (Disabled)  | Service Flags: Kernel Driver, Shared Process |         |             |
| Error Severity: Normal                            |         |             | T13B (SCSI miniport)                         | Stopped | (Disabled)  |
| Service Flags: Kernel Driver, Shared Process      |         |             | Error Severity: Normal                       |         |             |
| qv (Video)  | Stopped | (Disabled)  | Service Flags: Kernel Driver, Shared Process |         |             |
| Error Severity: Ignore                            |         |             | TCP/IP Service (PNP_TDI)                     | Running | (Automatic) |
| Service Flags: Kernel Driver, Shared Process      |         |             | C:\WINNT\System32\drivers\tcpip.sys          |         |             |
| Rdr (Network)                                     | Running | (Manual)    | Error Severity: Normal                       |         |             |
| C:\WINNT\System32\drivers\rdr.sys                 |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Error Severity: Normal                            |         |             | tga (Video)                                  | Stopped | (Disabled)  |
| Service Flags: File System Driver, Shared Process |         |             | Error Severity: Ignore                       |         |             |
| s3 (Video)  | Stopped | (Disabled)  | Service Flags: Kernel Driver, Shared Process |         |             |
| Error Severity: Ignore                            |         |             | tmv1 (SCSI miniport)                         | Stopped | (Disabled)  |
| Service Flags: Kernel Driver, Shared Process      |         |             | Error Severity: Normal                       |         |             |
| Scsiprnt (Extended base)                          | Stopped | (Automatic) | Service Flags: Kernel Driver, Shared Process |         |             |
| Error Severity: Ignore                            |         |             | Ultra124 (SCSI miniport)                     | Stopped | (Disabled)  |
| Service Flags: Kernel Driver, Shared Process      |         |             | Error Severity: Normal                       |         |             |
| Group Dependencies:                               |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| SCSI miniport                                     |         |             | Ultra14f (SCSI miniport)                     | Stopped | (Disabled)  |
| Scsiscan (SCSI Class)                             | Running | (System)    | Error Severity: Normal                       |         |             |
| Error Severity: Ignore                            |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Service Flags: Kernel Driver, Shared Process      |         |             | Ultra24f (SCSI miniport)                     | Stopped | (Disabled)  |
| Group Dependencies:                               |         |             | Error Severity: Normal                       |         |             |
| SCSI miniport                                     |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Serial (Extended base)                            | Running | (Automatic) | update (Base)                                | Stopped | (System)    |
| Error Severity: Ignore                            |         |             | Error Severity: Ignore                       |         |             |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Sermouse (Pointer Port)                           | Stopped | (Disabled)  | v7vram (Video)                               | Stopped | (Disabled)  |
| Error Severity: Ignore                            |         |             | Error Severity: Ignore                       |         |             |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Sfloppy (Primary disk)                            | Stopped | (System)    | VgaSave (Video Save)                         | Stopped | (System)    |
| Error Severity: Ignore                            |         |             | C:\WINNT\System32\drivers\vga.sys            |         |             |
| Service Flags: Kernel Driver, Shared Process      |         |             | Error Severity: Ignore                       |         |             |
| Group Dependencies:                               |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| SCSI miniport                                     |         |             | VgaStart (Video Init)                        | Stopped | (System)    |
| Simbad (Filter)                                   | Stopped | (Disabled)  | C:\WINNT\System32\drivers\vga.sys            |         |             |
| Error Severity: Normal                            |         |             | Error Severity: Ignore                       |         |             |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| slcd32 (SCSI miniport)                            | Stopped | (Disabled)  | Wd33c93 (SCSI miniport)                      | Stopped | (Disabled)  |
| Error Severity: Normal                            |         |             | Error Severity: Normal                       |         |             |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Sparrow (SCSI miniport)                           | Stopped | (Disabled)  | wd90c24a (Video)                             | Stopped | (Disabled)  |
| Error Severity: Normal                            |         |             | Error Severity: Ignore                       |         |             |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Spock (SCSI miniport)                             | Stopped | (Disabled)  | wdvga (Video)                                | Stopped | (Disabled)  |
| Error Severity: Normal                            |         |             | Error Severity: Ignore                       |         |             |
| Service Flags: Kernel Driver, Shared Process      |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Srv (Network)                                     | Running | (Manual)    | weitekp9 (Video)                             | Stopped | (Disabled)  |
| C:\WINNT\System32\drivers\srv.sys                 |         |             | Error Severity: Ignore                       |         |             |
| Error Severity: Normal                            |         |             | Service Flags: Kernel Driver, Shared Process |         |             |
| Service Flags: File System Driver, Shared Process |         |             | Xga (Video)                                  | Stopped | (Disabled)  |

Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process

IRQ and Port Report

| Devices                 | Vector | Level | Affinity   |
|-------------------------|--------|-------|------------|
| MPS 1.4 - APIC platform | 8      | 8     | 0x0000000f |
| MPS 1.4 - APIC platform | 0      | 0     | 0x0000000f |
| MPS 1.4 - APIC platform | 1      | 1     | 0x0000000f |
| MPS 1.4 - APIC platform | 2      | 2     | 0x0000000f |
| MPS 1.4 - APIC platform | 3      | 3     | 0x0000000f |
| MPS 1.4 - APIC platform | 4      | 4     | 0x0000000f |
| MPS 1.4 - APIC platform | 5      | 5     | 0x0000000f |
| MPS 1.4 - APIC platform | 6      | 6     | 0x0000000f |
| MPS 1.4 - APIC platform | 7      | 7     | 0x0000000f |
| MPS 1.4 - APIC platform | 8      | 8     | 0x0000000f |
| MPS 1.4 - APIC platform | 9      | 9     | 0x0000000f |
| MPS 1.4 - APIC platform | 10     | 10    | 0x0000000f |
| MPS 1.4 - APIC platform | 11     | 11    | 0x0000000f |
| MPS 1.4 - APIC platform | 12     | 12    | 0x0000000f |
| MPS 1.4 - APIC platform | 13     | 13    | 0x0000000f |
| MPS 1.4 - APIC platform | 14     | 14    | 0x0000000f |
| MPS 1.4 - APIC platform | 15     | 15    | 0x0000000f |
| MPS 1.4 - APIC platform | 16     | 16    | 0x0000000f |
| MPS 1.4 - APIC platform | 17     | 17    | 0x0000000f |
| MPS 1.4 - APIC platform | 18     | 18    | 0x0000000f |
| MPS 1.4 - APIC platform | 19     | 19    | 0x0000000f |
| MPS 1.4 - APIC platform | 20     | 20    | 0x0000000f |
| MPS 1.4 - APIC platform | 21     | 21    | 0x0000000f |
| MPS 1.4 - APIC platform | 22     | 22    | 0x0000000f |
| MPS 1.4 - APIC platform | 23     | 23    | 0x0000000f |
| MPS 1.4 - APIC platform | 24     | 24    | 0x0000000f |
| MPS 1.4 - APIC platform | 25     | 25    | 0x0000000f |
| MPS 1.4 - APIC platform | 26     | 26    | 0x0000000f |
| MPS 1.4 - APIC platform | 27     | 27    | 0x0000000f |
| MPS 1.4 - APIC platform | 28     | 28    | 0x0000000f |
| MPS 1.4 - APIC platform | 29     | 29    | 0x0000000f |
| MPS 1.4 - APIC platform | 30     | 30    | 0x0000000f |
| MPS 1.4 - APIC platform | 31     | 31    | 0x0000000f |
| MPS 1.4 - APIC platform | 32     | 32    | 0x0000000f |
| MPS 1.4 - APIC platform | 33     | 33    | 0x0000000f |
| MPS 1.4 - APIC platform | 34     | 34    | 0x0000000f |
| MPS 1.4 - APIC platform | 35     | 35    | 0x0000000f |
| MPS 1.4 - APIC platform | 36     | 36    | 0x0000000f |
| MPS 1.4 - APIC platform | 37     | 37    | 0x0000000f |
| MPS 1.4 - APIC platform | 38     | 38    | 0x0000000f |
| MPS 1.4 - APIC platform | 39     | 39    | 0x0000000f |
| MPS 1.4 - APIC platform | 40     | 40    | 0x0000000f |
| MPS 1.4 - APIC platform | 41     | 41    | 0x0000000f |
| MPS 1.4 - APIC platform | 42     | 42    | 0x0000000f |
| MPS 1.4 - APIC platform | 43     | 43    | 0x0000000f |
| MPS 1.4 - APIC platform | 44     | 44    | 0x0000000f |
| MPS 1.4 - APIC platform | 45     | 45    | 0x0000000f |
| MPS 1.4 - APIC platform | 46     | 46    | 0x0000000f |
| MPS 1.4 - APIC platform | 47     | 47    | 0x0000000f |

|                         |     |     |            |
|-------------------------|-----|-----|------------|
| MPS 1.4 - APIC platform | 61  | 61  | 0x0000000f |
| MPS 1.4 - APIC platform | 65  | 65  | 0x0000000f |
| MPS 1.4 - APIC platform | 80  | 80  | 0x0000000f |
| MPS 1.4 - APIC platform | 193 | 193 | 0x0000000f |
| MPS 1.4 - APIC platform | 225 | 225 | 0x0000000f |
| MPS 1.4 - APIC platform | 253 | 253 | 0x0000000f |
| MPS 1.4 - APIC platform | 254 | 254 | 0x0000000f |
| MPS 1.4 - APIC platform | 255 | 255 | 0x0000000f |
| i8042prt                | 1   | 1   | 0xffffffff |
| i8042prt                | 12  | 12  | 0xffffffff |
| Serial                  | 4   | 4   | 0x00000000 |
| Serial                  | 3   | 3   | 0x00000000 |
| E100B                   | 28  | 28  | 0x6db6db6d |
| Floppy                  | 6   | 6   | 0x00000000 |
| aic78xx                 | 24  | 24  | 0x00000000 |
| aic78xx                 | 25  | 25  | 0x00000000 |
| atapi                   | 0   | 14  | 0x00000000 |
| dac960nt                | 36  | 36  | 0x00000000 |
| dac960nt                | 44  | 44  | 0x00000000 |
| dac960nt                | 16  | 16  | 0x00000000 |
| dac960nt                | 20  | 20  | 0x00000000 |
| dac960nt                | 16  | 16  | 0x00000000 |
| dac960nt                | 20  | 20  | 0x00000000 |
| dac960nt                | 24  | 24  | 0x00000000 |
| dac960nt                | 28  | 28  | 0x00000000 |

| Devices                 | Physical Address | Length       |
|-------------------------|------------------|--------------|
| MPS 1.4 - APIC platform | 0x00000000       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x00000020       | 0x000000002  |
| MPS 1.4 - APIC platform | 0x00000040       | 0x000000004  |
| MPS 1.4 - APIC platform | 0x00000048       | 0x000000004  |
| MPS 1.4 - APIC platform | 0x00000061       | 0x000000001  |
| MPS 1.4 - APIC platform | 0x00000070       | 0x000000002  |
| MPS 1.4 - APIC platform | 0x00000080       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x00000092       | 0x000000001  |
| MPS 1.4 - APIC platform | 0x000000a0       | 0x000000002  |
| MPS 1.4 - APIC platform | 0x000000c0       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x000000f0       | 0x000000010  |
| i8042prt                | 0x00000060       | 0x000000001  |
| i8042prt                | 0x00000064       | 0x000000001  |
| Parport                 | 0x00000378       | 0x000000003  |
| Serial                  | 0x000003f8       | 0x000000007  |
| Serial                  | 0x000002f8       | 0x000000007  |
| Floppy                  | 0x000003f0       | 0x000000006  |
| Floppy                  | 0x000003f7       | 0x000000001  |
| aic78xx                 | 0x00003000       | 0x000000100  |
| aic78xx                 | 0x00003400       | 0x000000100  |
| atapi                   | 0x000001f0       | 0x000000008  |
| atapi                   | 0x000003f6       | 0x000000001  |
| cirrus                  | 0x000003b0       | 0x00000000c  |
| cirrus                  | 0x000003c0       | 0x0000000020 |

DMA and Memory Report

| Devices | Channel | Port |
|---------|---------|------|
|---------|---------|------|



```

-----
Floppy                2      0
-----
Devices                Physical Address  Length
-----
MPS 1.4 - APIC platform 0xfec10000 0x00000400
MPS 1.4 - APIC platform 0xfec10000 0x00000400
E100B                 0xfe404000 0x0000001e
aic78xx                0xfe100000 0x00001000
aic78xx                0xfe101000 0x00001000
dac960nt               0xfc300000 0x00002000
dac960nt               0xfc302000 0x00002000
dac960nt               0xfe400000 0x00002000
dac960nt               0xfe402000 0x00002000
dac960nt               0xfe800000 0x00002000
dac960nt               0xfe802000 0x00002000
dac960nt               0xfe804000 0x00002000
dac960nt               0xfe806000 0x00002000
cirrus                 0x000a0000 0x00002000
cirrus                 0xfd000000 0x01000000

```

Environment Report

System Environment Variables

```

ComSpec=C:\WINNT\system32\cmd.exe
HOME=C:/
NTRESKIT=Z:\NTRESKIT
NUMBER_OF_PROCESSORS=4
OS=Windows_NT
Os2LibPath=C:\WINNT\system32\os2\dll;

Path=C:\MKS\mksnt;C:\WINNT\system32;C:\WINNT;Z:\NTRESKIT;Z:\NTRESKIT\Perl;
z:\emon\bin;C:\MSSQL7\BINN
PROCESSOR_ARCHITECTURE=x86
PROCESSOR_IDENTIFIER=x86 Family 6 Model 5 Stepping 2, GenuineIntel
PROCESSOR_LEVEL=6
PROCESSOR_REVISION=0502
ROOTDIR=C:/MKS
SHELL=C:/MKS/mksnt/sh.exe
TMPDIR=C:/TEMP
windir=C:\WINNT

```

Environment Variables for Current User

```

TEMP=C:\TEMP
TMP=C:\TEMP

```

Network Report

Your Access Level: Admin & Local

```

Workgroup or Domain: WORKGROUP
Network Version: 4.0
LanRoot: WORKGROUP
Logged On Users: 1
Current User (1): Administrator
    Logon Domain: AVALON4
    Logon Server: AVALON4

Transport: Nbf_E100B1, 00-A0-C9-C5-45-C4, VC's: 0, Wan: Wan

Character Wait: 3,600
Collection Time: 250
Maximum Collection Count: 16
Keep Connection: 600
Maximum Commands: 5
Session Time Out: 45
Character Buffer Size: 512
Maximum Threads: 17
Lock Quota: 6,144
Lock Increment: 10
Maximum Locks: 500
Pipe Increment: 10
Maximum Pipes: 500
Cache Time Out: 40
Dormant File Limit: 45
Read Ahead Throughput: 4,294,967,295
Mailslot Buffers: 3
Server Announce Buffers: 20
Illegal Datagrams: 5
Datagram Reset Frequency: 60
Log Election Packets: False
Use Opportunistic Locking: True
Use Unlock Behind: True
Use Close Behind: True
Buffer Pipes: True
Use Lock, Read, Unlock: True
Use NT Caching: True
Use Raw Read: True
Use Raw Write: True
Use Write Raw Data: True
Use Encryption: True
Buffer Deny Write Files: True
Buffer Read Only Files: True
Force Core Creation: True
512 Byte Max Transfer: False
Bytes Received: 335,781
SMB's Received: 389
Paged Read Bytes Requested: 290,816
Non Paged Read Bytes Requested: 283,947
Cache Read Bytes Requested: 283,947
Network Read Bytes Requested: 283,947
Bytes Transmitted: 353,104
SMB's Transmitted: 389
Paged Read Bytes Requested: 0
Non Paged Read Bytes Requested: 321,085
Cache Read Bytes Requested: 0
Network Read Bytes Requested: 320,254
Initially Failed Operations: 0

```

Failed Completion Operations: 0  
 Read Operations: 11  
 Random Read Operations: 0  
 Read SMB's: 11  
 Large Read SMB's: 5  
 Small Read SMB's: 1  
 Write Operations: 11  
 Random Write Operations: 0  
 Write SMB's: 82  
 Large Write SMB's: 8  
 Small Write SMB's: 0  
 Raw Reads Denied: 0  
 Raw Writes Denied: 0  
 Network Errors: 0  
 Sessions: 5  
 Failed Sessions: 0  
 Reconnects: 0  
 Core Connects: 0  
 LM 2.0 Connects: 0  
 LM 2.x Connects: 0  
 Windows NT Connects: 3  
 Server Disconnects: 2  
 Hung Sessions: 0  
 Use Count: 1  
 Failed Use Count: 0  
 Current Commands: 0  
 Server File Opens: 0  
 Server Device Opens: 0  
 Server Jobs Queued: 0  
 Server Session Opens: 0  
 Server Sessions Timed Out: 0  
 Server Sessions Errored Out: 0  
 Server Password Errors: 0  
 Server Permission Errors: 0  
 Server System Errors: 0  
 Server Bytes Sent: 269  
 Server Bytes Received: 485  
 Server Average Response Time: 0  
 Server Request Buffers Needed: 0  
 Server Big Buffers Needed: 0

## NT Server Registry Information

### Software\Microsoft

Key Name: SOFTWARE\Microsoft\MMC  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 11:42 AM

Key Name: SOFTWARE\Microsoft\MMC\NodeTypes  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 11:42 AM

Key Name: SOFTWARE\Microsoft\MMC\Settings  
 Class Name: <NO CLASS>  
 Last Write Time: 9/4/98 - 8:39 AM  
 Value 0  
 Name: Help File Index  
 Type: REG\_DWORD  
 Data: 0x2

Key Name: SOFTWARE\Microsoft\MMC\SnapIns  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 11:42 AM

11d0- Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}  
 Class Name: <NO CLASS>  
 Last Write Time: 9/2/98 - 3:13 PM  
 Value 0  
 Name: About  
 Type: REG\_SZ  
 Data: {00100101-1816-11d0-8EF5-00AA0062C58F}

Value 1  
 Name: NameString  
 Type: REG\_SZ  
 Data: Microsoft SQL Enterprise Manager

11d0- Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\About  
 Class Name: <NO CLASS>  
 Last Write Time: 9/2/98 - 3:13 PM  
 Value 0  
 Name: <NO NAME>  
 Type: REG\_SZ  
 Data: {00100101-1816-11d0-8EF5-00AA0062C58F}

11d0- Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\NameString  
 Class Name: <NO CLASS>  
 Last Write Time: 9/2/98 - 3:13 PM  
 Value 0  
 Name: <NO NAME>  
 Type: REG\_SZ  
 Data: Microsoft SQL Enterprise Manager

11d0- Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\NodeTypes  
 Class Name: <NO CLASS>  
 Last Write Time: 9/2/98 - 3:13 PM

11d0- Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\NodeTypes\{00100200-1816-F5-00AA0062C58F}

11d0-8E Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:13 PM

11d0- Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\Standalone

Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:13 PM

Key Name: SOFTWARE\Microsoft\MSDTC  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:13 PM

Value 0  
Name: MaxLogSize  
Type: REG\_DWORD  
Data: 0x200

Key Name: SOFTWARE\Microsoft\MSDTC\Setup  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:13 PM

Value 0  
Name: InstallCode  
Type: REG\_DWORD  
Data: 0

Value 1  
Name: InstallState  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: MajorVersion  
Type: REG\_DWORD  
Data: 0x20000

Value 3  
Name: MinorVersion  
Type: REG\_DWORD  
Data: 0x2f8

Key Name: SOFTWARE\Microsoft\MSDTC\Setup\ExitStatus  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:13 PM

Value 0  
Name: CompletionComment  
Type: REG\_SZ  
Data: Source = DtcComplete, ExitType = Success, Successful

1 Install

Value 1  
Name: ErrorCode  
Type: REG\_DWORD  
Data: 0

Value 2  
Name: ExitCode  
Type: REG\_DWORD  
Data: 0

Value 3  
Name: Source  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:00 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Client  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:13 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Client\ConnectTo  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:57 PM

Value 0  
Name: DSQUERY  
Type: REG\_SZ  
Data: DBMSOCCN

Key Name: SOFTWARE\Microsoft\MSSQLServer\Client\DB-Lib  
Class Name: <NO CLASS>  
Last Write Time: 9/21/98 - 3:37 PM

Value 0  
Name: AutoAnsiToOem  
Type: REG\_SZ  
Data: on

Key Name: SOFTWARE\Microsoft\MSSQLServer\Client\TDS  
Class Name: <NO CLASS>  
Last Write Time: 9/4/98 - 4:50 PM

Value 0  
Name: <NO NAME>  
Type: REG\_SZ  
Data: 7.0

Value 1  
Name: .  
Type: REG\_SZ  
Data: 7.0

Value 2

```

Name:          Avalon4
Type:         REG_SZ
Data:         7.0

Key Name:     SOFTWARE\Microsoft\MSSQLServer\ClientSetup
Class Name:   <NO CLASS>
Last Write Time: 9/2/98 - 3:16 PM
Value 0
  Name:       SQLPath
  Type:       REG_SZ
  Data:       C:\MSSQL7

Key Name:     SOFTWARE\Microsoft\MSSQLServer\MSSQLServer
Class Name:   <NO CLASS>
Last Write Time: 9/2/98 - 3:16 PM
Value 0
  Name:       AuditLevel
  Type:       REG_DWORD
  Data:       0

Value 1
  Name:       BackupDirectory
  Type:       REG_SZ
  Data:       C:\MSSQL7\BACKUP

Value 2
  Name:       DefaultCompStyle
  Type:       REG_SZ
  Data:       0

Value 3
  Name:       DefaultDomain
  Type:       REG_SZ
  Data:       AVALON4

Value 4
  Name:       DefaultLocaleID
  Type:       REG_SZ
  Data:       8200

Value 5
  Name:       DefaultLogin
  Type:       REG_SZ
  Data:       guest

Value 6
  Name:       DefaultSortID
  Type:       REG_SZ
  Data:       50

Value 7
  Name:       ListenOn
  Type:       REG_MULTI_SZ
  Data:       SSNMPN70,\\.\pipe\sql\query
              SSMSSO70,1433

```

```

Value 8
  Name:       LoginMode
  Type:       REG_DWORD
  Data:       0

Value 9
  Name:       Map#
  Type:       REG_SZ
  Data:       -

Value 10
  Name:       Map$
  Type:       REG_SZ
  Data:

Value 11
  Name:       Map_
  Type:       REG_SZ
  Data:       \

Value 12
  Name:       ResourceMgrID
  Type:       REG_SZ
  Data:       {4002167A-42B2-11D2-B9ED-00A0C9C545C4}

Value 13
  Name:       RWSListenAddress
  Type:       REG_SZ
  Data:

Value 14
  Name:       SetHostName
  Type:       REG_DWORD
  Data:       0

Value 15
  Name:       Tapeloadwaittime
  Type:       REG_DWORD
  Data:       0xffffffff

Key Name:     SOFTWARE\Microsoft\MSSQLServer\MSSQLServer\CurrentV
              ersion
Class Name:   <NO CLASS>
Last Write Time: 9/2/98 - 3:13 PM
Value 0
  Name:       checksum
  Type:       REG_BINARY
  Data:       00000000 36 35 32 32 63 31 35 63 - 32 37 64 65 64 62 32 38
              6522c15c
              27dedb28
              00000010 61 61 30 33 34 34 64 64 - 31 31 36 38 65 32 66 38
              aa0344dd
              1168e2f8

```

```

00000020 35 31 39 35 62 34 30 62 - 65 39 34 31 62 31 32 35
5195b40b
e941b125
00000030 62 37 66 32 64 36 39 36 - 36 36 34 62 64 63 63 32
b7f2d696
664bdcc2
00000040 31 31 30 62 36 36 65 30 - 34 31 38 61 31 63 33 39
110b66e0
418a1c39
00000050 38 30 65 33 61 34 66 63 - 63 36 65 34 38 64 38 38
80e3a4fc
c6e48d88
00000060 37 32 35 32 32 66 31 38 - 63 63 31 34 34 35 38 61
72522f18
cc14458a
00000070 62 31 65 34 37 36 39 63 - 36 66 33 32 66 65 32 38
b1e4769c
6f32fe28
00000080 31 64 65 36 00
1de6.

```

```

Value 1
Name: CurrentVersion
Type: REG_SZ
Data: 7.00.549

```

```

Value 2
Name: RegisteredOwner
Type: REG_SZ
Data: SAM&M

```

```

Value 3
Name: SerialNumber
Type: REG_DWORD
Data: 0x81530040

```

```

Key Name:
SOFTWARE\Microsoft\MSSQLServer\MSSQLServer\Paramete
rs
Class Name: <NO CLASS>
Last Write Time: 9/2/98 - 3:13 PM
Value 0
Name: SQLArg0
Type: REG_SZ
Data: -dC:\MSSQL7\data\master.mdf
Value 1
Name: SQLArg1
Type: REG_SZ
Data: -eC:\MSSQL7\log\ERRORLOG
Value 2
Name: SQLArg2
Type: REG_SZ
Data: -lC:\MSSQL7\data\mastlog.ldf

```

```

Key Name:
SOFTWARE\Microsoft\MSSQLServer\MSSQLServer\RPCNetLi
b
Class Name: <NO CLASS>
Last Write Time: 9/2/98 - 3:13 PM
Value 0
Name: Security
Type: REG_SZ
Data:

```

```

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers
Class Name: <NO CLASS>
Last Write Time: 9/2/98 - 3:16 PM
Value 0
Name: AllowInProcess
Type: REG_DWORD
Data: 0x1

```

```

Key Name:
SOFTWARE\Microsoft\MSSQLServer\Providers\ADSDSOObje
ct
Class Name: <NO CLASS>
Last Write Time: 9/2/98 - 3:16 PM
Value 0
Name: AllowInProcess
Type: REG_DWORD
Data: 0x1

```

```

Key Name:
SOFTWARE\Microsoft\MSSQLServer\Providers\DTSPackage
DSO
Class Name: <NO CLASS>
Last Write Time: 9/2/98 - 3:16 PM
Value 0
Name: AllowInProcess
Type: REG_DWORD
Data: 0x1

```

```

Key Name:
SOFTWARE\Microsoft\MSSQLServer\Providers\Microsoft.
Jet.OLEDB.4.0
Class Name: <NO CLASS>
Last Write Time: 9/2/98 - 3:16 PM
Value 0
Name: AllowInProcess
Type: REG_DWORD
Data: 0x1

```

```

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSDAORA
Class Name: <NO CLASS>
Last Write Time: 9/2/98 - 3:16 PM
Value 0
Name: AllowInProcess

```

Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSDASQL  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSIDX  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSQLImpPro  
v  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSSEARCHSQ  
L  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\SQLOLEDB  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:00 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication\MergeReplicationProvider  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:00 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication\MergeReplicationProvider\7.0  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:00 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication\MergeReplicationProvider\7.0\MsJet  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:20 PM  
Value 0  
Name: <NO NAME>  
Type: REG\_SZ  
Data: {f159cf30-0db4-11d1-b272-00aa00b8de95}

Key Name: SOFTWARE\Microsoft\MSSQLServer\Setup  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:13 PM  
Value 0  
Name: SourcePath  
Type: REG\_SZ  
Data: Z:\Sql170549.03p\x86\Data

Value 1  
Name: SQLDataRoot  
Type: REG\_SZ  
Data: C:\MSSQL7

Value 2  
Name: SQLPath  
Type: REG\_SZ  
Data: C:\MSSQL7

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQL Service Manager  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: Action Verify  
Type: REG\_DWORD  
Data: 0

Value 1  
Name: DefaultSvc  
Type: REG\_SZ  
Data: MSSQLServer

Value 2  
Name: Remote

Type: REG\_DWORD  
Data: 0x1

Value 3  
Name: Services  
Type: REG\_MULTI\_SZ  
Data: MSSQLServer  
SQLServerAgent  
MSDTC

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLLEW  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLLEW\Replication  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM

Value 0  
Name: PerfmonFile  
Type: REG\_SZ  
Data: C:\MSSQL7\BINN\REPLMON.PMC

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLLEW\Wizards  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM

Value 0  
Name: Web Assistant  
Type: REG\_SZ  
Data: C:\MSSQL7\BINN\semwebwz.DLL^WebWizardEntry

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLServerAgent  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM

Value 0  
Name: DownloadedMaxRows  
Type: REG\_DWORD  
Data: 0x64

Value 1  
Name: ErrorLogFile  
Type: REG\_SZ  
Data: C:\MSSQL7\LOG\SQLAGENT.OUT

Value 2  
Name: ErrorLoggingLevel  
Type: REG\_DWORD  
Data: 0x3

Value 3  
Name: JobHistoryMaxRows  
Type: REG\_DWORD  
Data: 0x3e8

Value 4

Name: JobHistoryMaxRowsPerJob  
Type: REG\_DWORD  
Data: 0x64

Value 5  
Name: MailAutoStart  
Type: REG\_DWORD  
Data: 0x1

Value 6  
Name: MSXServerName  
Type: REG\_SZ  
Data:

Value 7  
Name: NonAlertableErrors  
Type: REG\_SZ  
Data: 1204,4002

Value 8  
Name: RestartSQLServer  
Type: REG\_DWORD  
Data: 0x1

Value 9  
Name: ServerHost  
Type: REG\_SZ  
Data:

Value 10  
Name: WorkingDirectory  
Type: REG\_SZ  
Data: C:\MSSQL7\JOBS

Key Name: SOFTWARE\Microsoft\MSSQLServer\SQLServerAgent\Subsy  
stems  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM

Value 0  
Name: ActiveScripting  
Type: REG\_SZ  
Data: C:\MSSQL7\BINN\SQLATXSS.DLL,NULL,ActiveScriptStart,  
ActiveScriptEvent,ActiveScriptStop,10

Value 1  
Name: CmdExec  
Type: REG\_SZ  
Data: C:\MSSQL7\BINN\SQLCMDSS.DLL,NULL,CmdExecStart,CmdEv  
ent,CmdExecStop,10

Value 2  
Name: Distribution  
Type: REG\_SZ

Data:  
C:\MSSQL7\BINN\SQLREPS.DLL,C:\MSSQL7\BINN\DISTRIB.  
EXE,ReplStart,ReplEvent,ReplStop,100

Value 3  
Name: LogReader  
Type: REG\_SZ  
Data:

C:\MSSQL7\BINN\SQLREPS.DLL,C:\MSSQL7\BINN\LOGREAD.  
EXE,ReplStart,ReplEvent,ReplStop,25

Value 4  
Name: Merge  
Type: REG\_SZ  
Data:

C:\MSSQL7\BINN\SQLREPS.DLL,C:\MSSQL7\BINN\REPLMERG  
.EXE,ReplStart,ReplEvent,ReplStop,100

Value 5  
Name: Snapshot  
Type: REG\_SZ  
Data:

C:\MSSQL7\BINN\SQLREPS.DLL,C:\MSSQL7\BINN\SNAPSHOT  
.EXE,ReplStart,ReplEvent,ReplStop,100

### Software\ODBC

Key Name: SOFTWARE\ODBC  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 11:39 AM

Key Name: SOFTWARE\ODBC\ODBC.INI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:01 PM

Key Name: SOFTWARE\ODBC\ODBC.INI\LocalServer  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:01 PM

Value 0  
Name: Description  
Type: REG\_SZ  
Data:

Value 1  
Name: Server  
Type: REG\_SZ  
Data: (local)

Value 2  
Name: Trusted\_Connection  
Type: REG\_SZ  
Data:

Value 3

Name: UseProcForPrepare  
Type: REG\_SZ  
Data: Yes

Key Name: SOFTWARE\ODBC\ODBCINST.INI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 11:39 AM

Driver  
Key Name: SOFTWARE\ODBC\ODBCINST.INI\Microsoft Access  
(\* .mdb)  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:00 PM

Value 0  
Name: APILevel  
Type: REG\_SZ  
Data: 1

Value 1  
Name: ConnectFunctions  
Type: REG\_SZ  
Data: YYN

Value 2  
Name: Driver  
Type: REG\_SZ  
Data: C:\WINNT\System32\odbcjt32.dll

Value 3  
Name: DriverODBCVer  
Type: REG\_SZ  
Data: 02.50

Value 4  
Name: FileExtns  
Type: REG\_SZ  
Data: \*.mdb

Value 5  
Name: FileUsage  
Type: REG\_SZ  
Data: 2

Value 6  
Name: Setup  
Type: REG\_SZ  
Data: C:\WINNT\System32\odbcjt32.dll

Value 7  
Name: SQLLevel  
Type: REG\_SZ  
Data: 0

Value 8  
Name: UsageCount  
Type: REG\_DWORD  
Data: 0x3



Driver Key Name: SOFTWARE\ODBC\ODBCINST.INI\Microsoft dBase (\*.dbf)  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 1:00 PM

Value 0  
 Name: APILevel  
 Type: REG\_SZ  
 Data: 1

Value 1  
 Name: ConnectFunctions  
 Type: REG\_SZ  
 Data: YYN

Value 2  
 Name: Driver  
 Type: REG\_SZ  
 Data: C:\WINNT\System32\odbcjt32.dll

Value 3  
 Name: DriverODBCVer  
 Type: REG\_SZ  
 Data: 02.50

Value 4  
 Name: FileExtns  
 Type: REG\_SZ  
 Data: \*.dbf, \*.ndx, \*.mdx

Value 5  
 Name: FileUsage  
 Type: REG\_SZ  
 Data: 1

Value 6  
 Name: Setup  
 Type: REG\_SZ  
 Data: C:\WINNT\System32\oddbse32.dll

Value 7  
 Name: SQLLevel  
 Type: REG\_SZ  
 Data: 0

Value 8  
 Name: UsageCount  
 Type: REG\_DWORD  
 Data: 0x3

Driver Key Name: SOFTWARE\ODBC\ODBCINST.INI\Microsoft Excel (\*.xls)  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 1:00 PM

Value 0  
 Name: APILevel

Type: REG\_SZ  
 Data: 1

Value 1  
 Name: ConnectFunctions  
 Type: REG\_SZ  
 Data: YYN

Value 2  
 Name: Driver  
 Type: REG\_SZ  
 Data: C:\WINNT\System32\odbcjt32.dll

Value 3  
 Name: DriverODBCVer  
 Type: REG\_SZ  
 Data: 02.50

Value 4  
 Name: FileExtns  
 Type: REG\_SZ  
 Data: \*.xls

Value 5  
 Name: FileUsage  
 Type: REG\_SZ  
 Data: 1

Value 6  
 Name: Setup  
 Type: REG\_SZ  
 Data: C:\WINNT\System32\odexl32.dll

Value 7  
 Name: SQLLevel  
 Type: REG\_SZ  
 Data: 0

Value 8  
 Name: UsageCount  
 Type: REG\_DWORD  
 Data: 0x3

Driver Key Name: SOFTWARE\ODBC\ODBCINST.INI\Microsoft FoxPro (\*.dbf)  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 1:00 PM

Value 0  
 Name: APILevel  
 Type: REG\_SZ  
 Data: 1

Value 1  
 Name: ConnectFunctions  
 Type: REG\_SZ  
 Data: YYN

```

Value 2
Name:      Driver
Type:      REG_SZ
Data:      C:\WINNT\System32\odbcjt32.dll

Value 3
Name:      DriverODBCVer
Type:      REG_SZ
Data:      02.50

Value 4
Name:      FileExtns
Type:      REG_SZ
Data:      *.dbf,*.cdx,*.idx,*.fpt

Value 5
Name:      FileUsage
Type:      REG_SZ
Data:      1

Value 6
Name:      Setup
Type:      REG_SZ
Data:      C:\WINNT\System32\odfox32.dll

Value 7
Name:      SQLLevel
Type:      REG_SZ
Data:      0

Value 8
Name:      UsageCount
Type:      REG_DWORD
Data:      0x3

Oracle
Key Name:  SOFTWARE\ODBC\ODBCINST.INI\Microsoft ODBC for
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 1:00 PM

Value 0
Name:      APILevel
Type:      REG_SZ
Data:      2

Value 1
Name:      ConnectFunctions
Type:      REG_SZ
Data:      YYY

Value 2
Name:      CPTimeout
Type:      REG_SZ
Data:      60

Value 3

```

```

Name:      Driver
Type:      REG_SZ
Data:      C:\WINNT\System32\msorcl32.dll

Value 4
Name:      DriverODBCVer
Type:      REG_SZ
Data:      02.50

Value 5
Name:      FileUsage
Type:      REG_SZ
Data:      0

Value 6
Name:      Setup
Type:      REG_SZ
Data:      C:\WINNT\System32\msorcl32.dll

Value 7
Name:      SQLLevel
Type:      REG_SZ
Data:      1

Value 8
Name:      UsageCount
Type:      REG_DWORD
Data:      0x3

Key Name:  SOFTWARE\ODBC\ODBCINST.INI\Microsoft Paradox
Driver (*.db )
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 1:00 PM

Value 0
Name:      APILevel
Type:      REG_SZ
Data:      1

Value 1
Name:      ConnectFunctions
Type:      REG_SZ
Data:      YYN

Value 2
Name:      Driver
Type:      REG_SZ
Data:      C:\WINNT\System32\odbcjt32.dll

Value 3
Name:      DriverODBCVer
Type:      REG_SZ
Data:      02.50

Value 4
Name:      FileExtns
Type:      REG_SZ
Data:      *.db

```

```

Value 5
  Name:      FileUsage
  Type:      REG_SZ
  Data:      1

Value 6
  Name:      Setup
  Type:      REG_SZ
  Data:      C:\WINNT\System32\odpdx32.dll

Value 7
  Name:      SQLLevel
  Type:      REG_SZ
  Data:      0

Value 8
  Name:      UsageCount
  Type:      REG_DWORD
  Data:      0x3

Key Name:    SOFTWARE\ODBC\ODBCINST.INI\Microsoft Text Driver
(*.txt; *.csv)
Class Name:  <NO CLASS>
Last Write Time: 6/10/98 - 1:00 PM

Value 0
  Name:      APILevel
  Type:      REG_SZ
  Data:      1

Value 1
  Name:      ConnectFunctions
  Type:      REG_SZ
  Data:      YYN

Value 2
  Name:      Driver
  Type:      REG_SZ
  Data:      C:\WINNT\System32\odbcjt32.dll

Value 3
  Name:      DriverODBCVer
  Type:      REG_SZ
  Data:      02.50

Value 4
  Name:      FileExtns
  Type:      REG_SZ
  Data:      *.*.asc,*.csv,*.tab,*.txt,*.csv

Value 5
  Name:      FileUsage
  Type:      REG_SZ
  Data:      1

Value 6

```

```

Name:      Setup
Type:      REG_SZ
Data:      C:\WINNT\System32\odtext32.dll

Value 7
  Name:      SQLLevel
  Type:      REG_SZ
  Data:      0

Value 8
  Name:      UsageCount
  Type:      REG_DWORD
  Data:      0x3

Key Name:    SOFTWARE\ODBC\ODBCINST.INI\Microsoft Visual
FoxPro Driver
Class Name:  <NO CLASS>
Last Write Time: 6/10/98 - 1:00 PM

Value 0
  Name:      APILevel
  Type:      REG_SZ
  Data:      0

Value 1
  Name:      ConnectFunctions
  Type:      REG_SZ
  Data:      YYN

Value 2
  Name:      Driver
  Type:      REG_SZ
  Data:      C:\WINNT\System32\vfpodbc.dll

Value 3
  Name:      DriverODBCVer
  Type:      REG_SZ
  Data:      02.50

Value 4
  Name:      FileExtns
  Type:      REG_SZ
  Data:      *.dbc,*.dbf,*.cdx,*.idx,*.fpt

Value 5
  Name:      FileUsage
  Type:      REG_SZ
  Data:      1

Value 6
  Name:      Setup
  Type:      REG_SZ
  Data:      C:\WINNT\System32\vfpodbc.dll

Value 7
  Name:      SQLLevel
  Type:      REG_SZ
  Data:      0

```

Value 8  
 Name: UsageCount  
 Type: REG\_DWORD  
 Data: 0x3

Key Name: SOFTWARE\ODBC\ODBCINST.INI\MS Code Page  
 Translator  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 1:00 PM

Value 0  
 Name: Setup  
 Type: REG\_SZ  
 Data: C:\WINNT\System32\MSCPXL32.DLL

Value 1  
 Name: Translator  
 Type: REG\_SZ  
 Data: C:\WINNT\System32\MSCPXL32.DLL

Value 2  
 Name: UsageCount  
 Type: REG\_DWORD  
 Data: 0x3

Key Name: SOFTWARE\ODBC\ODBCINST.INI\ODBC Core  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 1:00 PM

Value 0  
 Name: UsageCount  
 Type: REG\_DWORD  
 Data: 0x6

Key Name: SOFTWARE\ODBC\ODBCINST.INI\ODBC Drivers  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 1:00 PM

Value 0  
 Name: Microsoft Access Driver (\*.mdb)  
 Type: REG\_SZ  
 Data: Installed

Value 1  
 Name: Microsoft dBase Driver (\*.dbf)  
 Type: REG\_SZ  
 Data: Installed

Value 2  
 Name: Microsoft Excel Driver (\*.xls)  
 Type: REG\_SZ  
 Data: Installed

Value 3  
 Name: Microsoft FoxPro Driver (\*.dbf)  
 Type: REG\_SZ  
 Data: Installed

Value 4  
 Name: Microsoft ODBC for Oracle  
 Type: REG\_SZ  
 Data: Installed

Value 5  
 Name: Microsoft Paradox Driver (\*.db )  
 Type: REG\_SZ  
 Data: Installed

Value 6  
 Name: Microsoft Text Driver (\*.txt; \*.csv)  
 Type: REG\_SZ  
 Data: Installed

Value 7  
 Name: Microsoft Visual FoxPro Driver  
 Type: REG\_SZ  
 Data: Installed

Value 8  
 Name: SQL Server  
 Type: REG\_SZ  
 Data: Installed

Key Name: SOFTWARE\ODBC\ODBCINST.INI\ODBC Translators  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 1:00 PM

Value 0  
 Name: MS Code Page Translator  
 Type: REG\_SZ  
 Data: Installed

Key Name: SOFTWARE\ODBC\ODBCINST.INI\SQL Server  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 1:00 PM

Value 0  
 Name: APILevel  
 Type: REG\_SZ  
 Data: 2

Value 1  
 Name: ConnectFunctions  
 Type: REG\_SZ  
 Data: YYY

Value 2  
 Name: CTimeout  
 Type: REG\_SZ  
 Data: 60

Value 3  
 Name: Driver  
 Type: REG\_SZ  
 Data: C:\WINNT\System32\sqlsrv32.dll

Value 4  
 Name: DriverODBCVer  
 Type: REG\_SZ  
 Data: 03.50

Value 5  
 Name: FileUsage  
 Type: REG\_SZ  
 Data: 0

Value 6  
 Name: Setup  
 Type: REG\_SZ  
 Data: C:\WINNT\System32\sqlsrv32.dll

Value 7  
 Name: SQLLevel  
 Type: REG\_SZ  
 Data: 1

Value 8  
 Name: UsageCount  
 Type: REG\_DWORD  
 Data: 0x3

### Software\Intel\E100B

Key Name: SYSTEM\CurrentControlSet\Services\E100B  
 Class Name: <NO CLASS>  
 Last Write Time: 9/17/98 - 9:52 AM

Value 0  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: Intel(R) PRO NDIS Driver

Value 1  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: Group  
 Type: REG\_SZ  
 Data: NDIS

Value 3  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: \SystemRoot\System32\drivers\E100BNT.SYS

Value 4  
 Name: RequestedSystemResources  
 Type: REG\_RESOURCE\_REQUIREMENTS\_LIST

### Data:

Interface Type: Internal  
 Bus Number: 0  
 Slot Number: 0  
 List 0

Descriptor 0  
 Resource: Interrupt  
 Option: 0x00000000  
 Disposition: Shared  
 Type: Level Sensitive  
 Minimum Vector: 0x1c  
 Maximum Vector: 0x1c

Descriptor 1  
 Resource: Memory  
 Option: 0x00000001  
 Disposition: Device Exclusive  
 Type: Write Only  
 Length: 0x1000  
 Alignment: 0x1000  
 Minimum Address: 0xfe404000  
 Maximum Address: 0xfe404fff

Descriptor 2  
 Resource: Memory  
 Option: 0x00000009  
 Disposition: Device Exclusive  
 Type: Write Only  
 Length: 0x1000  
 Alignment: 0x1000  
 Minimum Address: 0xfe404000  
 Maximum Address: 0xfe404fff

Descriptor 3  
 Resource: Memory  
 Option: 0x00000008  
 Disposition: Device Exclusive  
 Type: Write Only  
 Length: 0x1000  
 Alignment: 0x1000  
 Minimum Address: 0xfe000000  
 Maximum Address: 0xfe0fffff

Descriptor 4  
 Resource: Port  
 Option: 0x00000001  
 Disposition: Device Exclusive  
 Type: Port  
 Length: 0x20  
 Alignment: 0x20  
 Minimum Address: 0x00003800  
 Maximum Address: 0x0000381f

Descriptor 5  
 Resource: Port  
 Option: 0x00000008  
 Disposition: Device Exclusive  
 Type: Port

Length: 0x20  
Alignment: 0x20  
Minimum Address: 0x00003800  
Maximum Address: 0x0000381f

Descriptor 6  
Resource: Memory  
Option: 0x00000001  
Disposition: Device Exclusive  
Type: Read / Write  
Length: 0x100000  
Alignment: 0x100000  
Minimum Address: 0xfe000000  
Maximum Address: 0xfe0fffff

Descriptor 7  
Resource: Memory  
Option: 0x00000008  
Disposition: Device Exclusive  
Type: Read / Write  
Length: 0x100000  
Alignment: 0x100000  
Minimum Address: 0xfe000000  
Maximum Address: 0xfe0fffff

Value 5  
Name: Start  
Type: REG\_DWORD  
Data: 0x2

Value 6  
Name: Type  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Enum  
Class Name: <NO CLASS>  
Last Write Time: 9/21/98 - 1:53 PM  
Value 0  
Name: 0  
Type: REG\_SZ  
Data: Root\LEGACY\_E100B\0000

Value 1  
Name: Count  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: NextInstance  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Linkage

Class Name: GenericClass  
Last Write Time: 9/21/98 - 1:49 PM  
Value 0  
Name: Bind  
Type: REG\_MULTI\_SZ  
Data: \Device\E100B1

Value 1  
Name: Export  
Type: REG\_MULTI\_SZ  
Data: \Device\E100B1

Value 2  
Name: Route  
Type: REG\_MULTI\_SZ  
Data: "E100B1"

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Linkage\Dis  
abled

Class Name: GenericClass  
Last Write Time: 9/21/98 - 1:49 PM  
Value 0  
Name: Bind  
Type: REG\_MULTI\_SZ  
Data:

Value 1  
Name: Export  
Type: REG\_MULTI\_SZ  
Data:

Value 2  
Name: Route  
Type: REG\_MULTI\_SZ  
Data:

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Parameters  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:01 AM

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Security  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 4:01 AM

Value 0  
Name: Security  
Type: REG\_BINARY  
Data: 00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00

.....  
.....

```

00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4..... .
.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050 73 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
s.....
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 00 00 b6 80 ....
...
#.....
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
.....
00000080 20 00 00 00 20 02 00 00 - 00 00 b6 80 00 00 1c 00 ...
...
.....
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
.....
000000a0 25 02 00 00 00 00 b6 80 - 00 00 18 00 fd 01 02 00
%.....
.....
000000b0 01 01 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
.....%...
000000c0 01 01 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

```

### Software\Intel\E100B1

```

Key Name:      SYSTEM\CurrentControlSet\Services\E100B1
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:01 AM
Value 0
  Name:        ErrorControl
  Type:        REG_DWORD
  Data:        0x1
Value 1
  Name:        Start
  Type:        REG_DWORD
  Data:        0x3
Value 2

```

```

Name:          Type
Type:          REG_DWORD
Data:          0x4

```

```

Key Name:      SYSTEM\CurrentControlSet\Services\E100B1\Linkage
Class Name:    GenericClass
Last Write Time: 9/21/98 - 1:55 PM
Value 0
  Name:        Bind
  Type:        REG_MULTI_SZ
  Data:        \Device\E100B1

```

```

Value 1
  Name:        Export
  Type:        REG_MULTI_SZ
  Data:        \Device\E100B1

```

```

Value 2
  Name:        Route
  Type:        REG_MULTI_SZ
  Data:        "E100B1"

```

```

Key Name:      SYSTEM\CurrentControlSet\Services\E100B1\Linkage\Di
sabled
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:01 AM

```

```

Key Name:      SYSTEM\CurrentControlSet\Services\E100B1\Parameters
Class Name:    GenericClass
Last Write Time: 9/21/98 - 1:49 PM
Value 0
  Name:        Adaptive_IFS
  Type:        REG_DWORD
  Data:        0x1

```

```

Value 1
  Name:        BoardHasBridge
  Type:        REG_DWORD
  Data:        0

```

```

Value 2
  Name:        BusNumber
  Type:        REG_DWORD
  Data:        0x3

```

```

Value 3
  Name:        BusType
  Type:        REG_DWORD
  Data:        0x5

```

```

Value 4

```

Name: BusTypeLocal  
 Type: REG\_DWORD  
 Data: 0x5  
  
 Value 5  
 Name: Coalesce  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 6  
 Name: CPUSaver  
 Type: REG\_DWORD  
 Data: 0x10  
  
 Value 7  
 Name: ForceDpx  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 8  
 Name: MediaType  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 9  
 Name: MWIEnable  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 10  
 Name: NumCoalesce  
 Type: REG\_DWORD  
 Data: 0x10  
  
 Value 11  
 Name: NumRfd  
 Type: REG\_DWORD  
 Data: 0x60  
  
 Value 12  
 Name: NumTbdPerTcb  
 Type: REG\_DWORD  
 Data: 0xc  
  
 Value 13  
 Name: NumTcb  
 Type: REG\_DWORD  
 Data: 0x40  
  
 Value 14  
 Name: RxDmaCount  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 15  
 Name: RxFifo  
 Type: REG\_DWORD  
 Data: 0x8

Value 16  
 Name: SlotNumber  
 Type: REG\_DWORD  
 Data: 0x7  
  
 Value 17  
 Name: Speed  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 18  
 Name: Threshold  
 Type: REG\_DWORD  
 Data: 0x10  
  
 Value 19  
 Name: TxDmaCount  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 20  
 Name: TxFifo  
 Type: REG\_DWORD  
 Data: 0x8  
  
 Value 21  
 Name: Txmitwait  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 22  
 Name: UcodeSW  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 23  
 Name: UnderrunRetry  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 24  
 Name: UseIo  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 25  
 Name: UseManualPCIAssign  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 26  
 Name: VlanMode  
 Type: REG\_DWORD  
 Data: 0



```

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\Parameters
  \Tcpip
Class Name:      GenericClass
Last Write Time: 9/21/98 - 1:55 PM
Value 0
  Name:          DefaultGateway
  Type:          REG_MULTI_SZ
  Data:

Value 1
  Name:          EnableDHCP
  Type:          REG_DWORD
  Data:          0

Value 2
  Name:          IPAddress
  Type:          REG_MULTI_SZ
  Data:          192.168.91.214

Value 3
  Name:          IPInterfaceContext
  Type:          REG_DWORD
  Data:          0x1

Value 4
  Name:          IPInterfaceContextMax
  Type:          REG_DWORD
  Data:          0x1

Value 5
  Name:          LLInterface
  Type:          REG_SZ
  Data:

Value 6
  Name:          PPTPFiltering
  Type:          REG_DWORD
  Data:          0

Value 7
  Name:          RawIPAllowedProtocols
  Type:          REG_MULTI_SZ
  Data:          0

Value 8
  Name:          SubnetMask
  Type:          REG_MULTI_SZ
  Data:          255.255.255.0

Value 9
  Name:          TCPAllowedPorts
  Type:          REG_MULTI_SZ
  Data:          0

```

```

Value 10
  Name:          UDPAllowedPorts
  Type:          REG_MULTI_SZ
  Data:          0

Value 11
  Name:          UseZeroBroadcast
  Type:          REG_DWORD
  Data:          0

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi
Class Name:      <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params
Class Name:      <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params\Adaptive_IFS
Class Name:      <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM
Value 0
  Name:          Base
  Type:          REG_SZ
  Data:          10

Value 1
  Name:          Default
  Type:          REG_SZ
  Data:          1

Value 2
  Name:          Max
  Type:          REG_SZ
  Data:          255

Value 3
  Name:          Min
  Type:          REG_SZ
  Data:          0

Value 4
  Name:          MiniHelp
  Type:          REG_SZ
  Data:

Value 5
  Name:          ParamDesc
  Type:          REG_SZ

```

```

Data: Adaptive Inter-Frame Spacing

Value 6
Name: Scale
Type: REG_SZ
Data: 1

Value 7
Name: Step
Type: REG_SZ
Data: 1

Value 8
Name: Type
Type: REG_SZ
Data: int

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
Params\Coalesce
Class Name: <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM
Value 0
Name: Default
Type: REG_SZ
Data: 0

Value 1
Name: MiniHelp
Type: REG_SZ
Data:

Value 2
Name: ParamDesc
Type: REG_SZ
Data: PCI Bus Efficiency

Value 3
Name: Type
Type: REG_SZ
Data: enum

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
Params\Coalesce\Enum
Class Name: <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM
Value 0
Name: 0
Type: REG_SZ
Data: Disabled

Value 1
Name: 1
Type: REG_SZ
Data: Enabled

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
Params\CPUSaver
Class Name: <NO CLASS>
Last Write Time: 9/18/98 - 1:55 PM
Value 0
Name: Default
Type: REG_SZ
Data: 8

Value 1
Name: LeftLabel
Type: REG_SZ
Data: Min

Value 2
Name: MiniHelp
Type: REG_SZ
Data: Description: Set the number of packets processed
r interrupt.

Value 3
Name: ParamDesc
Type: REG_SZ
Data: Adaptive Performance Tuning

Value 4
Name: RightLabel
Type: REG_SZ
Data: Max

Value 5
Name: Type
Type: REG_SZ
Data: slider

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
Params\CPUSaver\Values
Class Name: <NO CLASS>
Last Write Time: 9/17/98 - 11:36 AM
Value 0
Name: 0
Type: REG_SZ
Data: 0

Value 1
Name: 1
Type: REG_SZ
Data: 2

Value 2
Name: 10
Type: REG_SZ

```

```

Data:                2048
Value 3
Name:                11
Type:                REG_SZ
Data:                4096
Value 4
Name:                2
Type:                REG_SZ
Data:                4
Value 5
Name:                3
Type:                REG_SZ
Data:                8
Value 6
Name:                4
Type:                REG_SZ
Data:                16
Value 7
Name:                5
Type:                REG_SZ
Data:                32
Value 8
Name:                6
Type:                REG_SZ
Data:                64
Value 9
Name:                7
Type:                REG_SZ
Data:                128
Value 10
Name:                8
Type:                REG_SZ
Data:                256
Value 11
Name:                9
Type:                REG_SZ
Data:                1024

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params\ForceDpx
Class Name:          <NO CLASS>
Last Write Time:    9/17/98 - 9:52 AM
Value 0
Name:                Default
Type:                REG_SZ
Data:                0

```

```

Value 1
Name:                MiniHelp
Type:                REG_SZ
Data:
Value 2
Name:                ParamDesc
Type:                REG_SZ
Data:                Duplex
Value 3
Name:                Type
Type:                REG_SZ
Data:                enum

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params\ForceDpx\Enum
Class Name:          <NO CLASS>
Last Write Time:    9/17/98 - 9:52 AM
Value 0
Name:                0
Type:                REG_SZ
Data:                Auto Detect
Value 1
Name:                1
Type:                REG_SZ
Data:                Half-Duplex
Value 2
Name:                2
Type:                REG_SZ
Data:                Full-Duplex

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params\NetworkAddress
Class Name:          <NO CLASS>
Last Write Time:    9/17/98 - 9:52 AM
Value 0
Name:                Default
Type:                REG_SZ
Data:
Value 1
Name:                MiniHelp
Type:                REG_SZ
Data:
Value 2
Name:                ParamDesc
Type:                REG_SZ
Data:                Locally Administrated Address
Value 3

```

```

Name:          Type
Type:         REG_SZ
Data:         edit

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params\NumCoalesce
Class Name:   <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM
Value 0
  Name:      Base
  Type:     REG_SZ
  Data:     10

Value 1
  Name:      Default
  Type:     REG_SZ
  Data:     8

Value 2
  Name:      Max
  Type:     REG_SZ
  Data:     32

Value 3
  Name:      Min
  Type:     REG_SZ
  Data:     1

Value 4
  Name:      MiniHelp
  Type:     REG_SZ
  Data:

Value 5
  Name:      ParamDesc
  Type:     REG_SZ
  Data:     Coalesce Buffers

Value 6
  Name:      Scale
  Type:     REG_SZ
  Data:     1

Value 7
  Name:      Step
  Type:     REG_SZ
  Data:     1

Value 8
  Name:      Type
  Type:     REG_SZ
  Data:     int

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\

```

```

Class Name:   Params\NumRfd
              <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM
Value 0
  Name:      Base
  Type:     REG_SZ
  Data:     10

Value 1
  Name:      Default
  Type:     REG_SZ
  Data:     48

Value 2
  Name:      Max
  Type:     REG_SZ
  Data:     1024

Value 3
  Name:      Min
  Type:     REG_SZ
  Data:     1

Value 4
  Name:      MiniHelp
  Type:     REG_SZ
  Data:

Value 5
  Name:      ParamDesc
  Type:     REG_SZ
  Data:     Receive Buffers

Value 6
  Name:      Scale
  Type:     REG_SZ
  Data:     1

Value 7
  Name:      Step
  Type:     REG_SZ
  Data:     1

Value 8
  Name:      Type
  Type:     REG_SZ
  Data:     int

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params\NumTcb
Class Name:   <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM
Value 0
  Name:      Base
  Type:     REG_SZ
  Data:     10

```

```

Value 1
  Name:      Default
  Type:      REG_SZ
  Data:      32

Value 2
  Name:      Max
  Type:      REG_SZ
  Data:      80

Value 3
  Name:      Min
  Type:      REG_SZ
  Data:      1

Value 4
  Name:      MiniHelp
  Type:      REG_SZ
  Data:

Value 5
  Name:      ParamDesc
  Type:      REG_SZ
  Data:      Transmit Control Blocks

Value 6
  Name:      Scale
  Type:      REG_SZ
  Data:      1

Value 7
  Name:      Step
  Type:      REG_SZ
  Data:      1

Value 8
  Name:      Type
  Type:      REG_SZ
  Data:      int

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params\Speed
Class Name:      <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM
Value 0
  Name:      Default
  Type:      REG_SZ
  Data:      0

Value 1
  Name:      MiniHelp
  Type:      REG_SZ
  Data:

Value 2

```

```

  Name:      ParamDesc
  Type:      REG_SZ
  Data:      Speed

Value 3
  Name:      Type
  Type:      REG_SZ
  Data:      enum

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params\Speed\Enum
Class Name:      <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM
Value 0
  Name:      0
  Type:      REG_SZ
  Data:      Auto Detect

Value 1
  Name:      10
  Type:      REG_SZ
  Data:      10 Mbps

Value 2
  Name:      100
  Type:      REG_SZ
  Data:      100 Mbps

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\
  Params\Threshold
Class Name:      <NO CLASS>
Last Write Time: 9/17/98 - 9:52 AM
Value 0
  Name:      Base
  Type:      REG_SZ
  Data:      10

Value 1
  Name:      Default
  Type:      REG_SZ
  Data:      16

Value 2
  Name:      Max
  Type:      REG_SZ
  Data:      200

Value 3
  Name:      Min
  Type:      REG_SZ
  Data:      0

Value 4
  Name:      MiniHelp

```

Type: REG\_SZ  
Data:

Value 5  
Name: ParamDesc  
Type: REG\_SZ  
Data: Adaptive Transmit Threshold

Value 6  
Name: Scale  
Type: REG\_SZ  
Data: 1

Value 7  
Name: Step  
Type: REG\_SZ  
Data: 1

Value 8  
Name: Type  
Type: REG\_SZ  
Data: int

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\  
Params\UcodeSW  
Class Name: <NO CLASS>  
Last Write Time: 9/17/98 - 9:52 AM

Value 0  
Name: Default  
Type: REG\_SZ  
Data: 1

Value 1  
Name: MiniHelp  
Type: REG\_SZ  
Data:

Value 2  
Name: ParamDesc  
Type: REG\_SZ  
Data: Adaptive Technology

Value 3  
Name: Type  
Type: REG\_SZ  
Data: enum

Key Name:  
SYSTEM\CurrentControlSet\Services\E100B1\ProsetNdi\  
Params\UcodeSW\Enum  
Class Name: <NO CLASS>  
Last Write Time: 9/17/98 - 9:52 AM

Value 0  
Name: 0  
Type: REG\_SZ

Data: Off

Value 1  
Name: 1  
Type: REG\_SZ  
Data: On

## Software/PROSet

Key Name: SYSTEM\CurrentControlSet\Services\PROSet  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:01 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\PROSet\Adapters  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:01 AM

Value 0  
Name: EPRO100  
Type: REG\_SZ  
Data: Intel EtherExpress PRO Adapter

Key Name: SYSTEM\CurrentControlSet\Services\PROSet\EPRO100  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:01 AM

Value 0  
Name: AdapterDescription  
Type: REG\_SZ  
Data: EPRO100\_GetAdapterDescription

Value 1  
Name: Configure  
Type: REG\_SZ  
Data: EPRO100\_Configure

Value 2  
Name: Detect  
Type: REG\_SZ  
Data: EPRO100\_Detect

Value 3  
Name: DeviceExist  
Type: REG\_SZ  
Data: EPRO100\_DeviceExist

Value 4  
Name: Diagnose  
Type: REG\_SZ  
Data: EPRO100\_Diagnose

Value 5  
Name: DLL  
Type: REG\_SZ  
Data: EPRO100.DLL

Value 6  
 Name: GetExtendedFeatures  
 Type: REG\_SZ  
 Data: EPRO100\_GetExtendedFeatures

Value 7  
 Name: Help  
 Type: REG\_SZ  
 Data: E100SET.HLP

Value 8  
 Name: InstallAnyway  
 Type: REG\_SZ  
 Data: EPRO100\_InstallAnyway

Value 9  
 Name: RegistryKey  
 Type: REG\_SZ  
 Data: EPRO100\_GetRegistryKey

Value 10  
 Name: Summary  
 Type: REG\_SZ  
 Data: EPRO100\_Resource\_Summary

Key Name:  
 SYSTEM\CurrentControlSet\Services\PROSet\EPRO100\Parameters

Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:01 AM

Value 0  
 Name: Adaptive\_IFS  
 Type: REG\_SZ  
 Data: 1,7,Adaptive Inter-Frame Spacing,0,2,1,0,255,1

Value 1  
 Name: BusNumber  
 Type: REG\_SZ  
 Data: 0,7,BusNumber,0,2,0,0,16,1

Value 2  
 Name: BusType  
 Type: REG\_SZ  
 Data: 0,7,BusType,0,2,5,2,5,1

Value 3  
 Name: BusTypeLocal  
 Type: REG\_SZ  
 Data: 0,7,BusTypeLocal,0,2,5,2,5,1

Value 4  
 Name: Eid  
 Type: REG\_SZ  
 Data: 0,7,Eid,0,2,0,0,4294967295,1

Value 5

Name: Fifo  
 Type: REG\_SZ  
 Data: 0,3,Fifo Depth,0,2,12,0,15,1

Value 6  
 Name: ForceDpx  
 Type: REG\_SZ  
 Data: 1,4,Duplex Mode,0,1,Auto,Auto,Half,Full

Value 7  
 Name: MapRegisters  
 Type: REG\_SZ  
 Data:

Value 8  
 Name: MediaType  
 Type: REG\_SZ  
 Data: 0,7,MediaType,0,2,1,1,1,1

Value 9  
 Name: MsPciScan  
 Type: REG\_SZ  
 Data: 0,4,MsPciScan,0,2,1,0,1,1

Value 10  
 Name: NetworkAddress  
 Type: REG\_SZ  
 Data: 1,7,Locally Administered Address,0,5,0,0,1,1

Value 11  
 Name: NumCoalesce  
 Type: REG\_SZ  
 Data: 1,7,Coalesce Buffers,0,2,8,1,32,1

Value 12  
 Name: NumRfd  
 Type: REG\_SZ  
 Data: 1,7,Receive Buffers,0,2,32,1,1024,1

Value 13  
 Name: NumTbd  
 Type: REG\_SZ  
 Data: 0,3,Transmit Buffer Descriptors,0,2,64,1,65535,1

Value 14  
 Name: NumTbdPerTcb  
 Type: REG\_SZ  
 Data: 0,4,Transmit Buffers per Frame,0,2,12,1,16,1

Value 15  
 Name: NumTcb  
 Type: REG\_SZ  
 Data: 1,7,Transmit Control Blocks,0,2,16,1,80,1

Value 16  
 Name: Off  
 Type: REG\_SZ  
 Data: 1,3,Off Timer,0,2,2,1,65535,1

Value 17  
 Name: On  
 Type: REG\_SZ  
 Data: 1,3,On Timer,0,2,32768,1,65535,1

Value 18  
 Name: PerfOptims  
 Type: REG\_SZ  
 Data: 0,4,PerfOptims,0,2,0,0,65535,1

Value 19  
 Name: RxDmaCount  
 Type: REG\_SZ  
 Data: 0,4,RxDmaCount,0,2,0,0,63,1

Value 20  
 Name: RxFifo  
 Type: REG\_SZ  
 Data: 0,4,Receive Fifo Depth,0,2,8,0,15,1

Value 21  
 Name: Slot  
 Type: REG\_SZ  
 Data:

Value 22  
 Name: Speed  
 Type: REG\_SZ  
 Data: 1,7,Network  
 Speed,0,4,Auto,Auto,0,10Mbps,10,100Mbps  
 ,100

Value 23  
 Name: Threshold  
 Type: REG\_SZ  
 Data: 0,7,Transmit Threshold,0,2,16,0,200,1

Value 24  
 Name: TxDmaCount  
 Type: REG\_SZ  
 Data: 0,4,TxDmaCount,0,2,0,0,63,1

Value 25  
 Name: TxFifo  
 Type: REG\_SZ  
 Data: 0,4,Transmit Fifo Depth,0,2,8,0,15,1

Value 26  
 Name: Txmitwait  
 Type: REG\_SZ  
 Data: 0,7,Txmitwait,0,2,1,0,255,1

Value 27  
 Name: UcodeSW  
 Type: REG\_SZ  
 Data: 0,7,UcodeSW,0,2,1,0,1,1

Value 28  
 Name: UnderrunRetry  
 Type: REG\_SZ  
 Data: 0,4,UnderrunRetry,0,2,1,0,3,1

## Services

Key Name: SYSTEM\CurrentControlSet\Services  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Key Name: SYSTEM\CurrentControlSet\Services\Abiosdisk  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Value 0  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0

Value 1  
 Name: Group  
 Type: REG\_SZ  
 Data: Primary disk

Value 2  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x4

Value 3  
 Name: Tag  
 Type: REG\_DWORD  
 Data: 0x3

Value 4  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Afd  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:05 AM

Value 0  
 Name: DependOnGroup  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: AFD Networking Support Environment

Value 2



|                  |   |                  |  |
|------------------|---|------------------|--|
| Name:            | ErrorControl  | Key Name:        | SYSTEM\CurrentControlSet\Services\Afd\Security         |
| Type:            | REG_DWORD   | Class Name:      | <NO CLASS>   |
| Data:            | 0x1   | Last Write Time: | 6/10/98 - 4:05 AM                                      |
| Value 3          |   | Value 0          |  |
| Name:            | Group   | Name:            | Security   |
| Type:            | REG_SZ  | Type:            | REG_BINARY   |
| Data:            | TDI   | Data:            |  |
| Value 4          |   | 00000000         | 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00      |
| Name:            | ImagePath   | .....            | .....  |
| Type:            | REG_EXPAND_SZ                                       | 00000010         | 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00      |
| Data:            | \SystemRoot\System32\drivers\afd.sys                | 4.....           | .....  |
| Value 5          |   | 00000020         | ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00      |
| Name:            | Start   | .....            | .....  |
| Type:            | REG_DWORD   | 00000030         | 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00      |
| Data:            | 0x2   | .....            | .....  |
| Value 6          |   | 00000040         | 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00      |
| Name:            | Type  | .....            | .....  |
| Type:            | REG_DWORD   | 00000050         | 70 00 69 00 00 00 1c 00 - fd 01 02 00 01 02 00 00      |
| Data:            | 0x1   | p.i.....         | .....  |
| Key Name:        | SYSTEM\CurrentControlSet\Services\Afd\Enum          | 00000060         | 00 00 00 05 20 00 00 00 - 23 02 00 00 70 00 00 00 .... |
| Class Name:      | <NO CLASS>  | ...              | ...  |
| Last Write Time: | 6/17/98 - 6:46 PM                                   | #...p...         | .....  |
| Value 0          |   | 00000070         | 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05      |
| Name:            | 0   | .....            | .....  |
| Type:            | REG_SZ  | 00000080         | 20 00 00 00 20 02 00 00 - 70 00 00 00 00 00 1c 00 ...  |
| Data:            | Root\LEGACY_AFD\0000                                | ...              | ...  |
| Value 1          |   | p.....           | .....  |
| Name:            | Count   | 00000090         | ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00      |
| Type:            | REG_DWORD   | .....            | .....  |
| Data:            | 0x1   | 000000a0         | 25 02 00 00 70 00 00 00 - 00 00 18 00 fd 01 02 00      |
| Value 2          |   | %...p...         | .....  |
| Name:            | NextInstance  | 000000b0         | 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00      |
| Type:            | REG_DWORD   | .....            | .....  |
| Data:            | 0x1   | ...%...          | 000000c0   |
| Key Name:        | SYSTEM\CurrentControlSet\Services\Afd\Linkage       | 000000d0         | 00 00 00 05 12 00 00 00 -                              |
| Class Name:      | GenericClass  | .....            | .....  |
| Last Write Time: | 6/10/98 - 4:05 AM                                   | .....            | .....  |
| Key Name:        | SYSTEM\CurrentControlSet\Services\Afd\Linkage\Disab | .....            | .....  |
| Class Name:      | GenericClass  | Key Name:        | SYSTEM\CurrentControlSet\Services\AFTRegistration      |
| Last Write Time: | 6/10/98 - 4:05 AM                                   | Class Name:      | GenericClass   |
| Key Name:        | SYSTEM\CurrentControlSet\Services\Afd\Parameters    | Last Write Time: | 6/10/98 - 4:01 AM                                      |
| Class Name:      | GenericClass  | Value 0          |  |
| Last Write Time: | 6/10/98 - 4:05 AM                                   | Name:            | Compatible1  |
|                  |   | Type:            | REG_SZ   |
|                  |   | Data:            | Intel,E100B,iAFT,32902,32634                           |

Key Name: SYSTEM\CurrentControlSet\Services\Aha154x  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
   Name: ErrorControl  
   Type: REG\_DWORD  
   Data: 0x1  
 Value 1  
   Name: Group  
   Type: REG\_SZ  
   Data: SCSI miniport  
 Value 2  
   Name: Start  
   Type: REG\_DWORD  
   Data: 0x4  
 Value 3  
   Name: Tag  
   Type: REG\_DWORD  
   Data: 0x6  
 Value 4  
   Name: Type  
   Type: REG\_DWORD  
   Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Aha174x  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
   Name: ErrorControl  
   Type: REG\_DWORD  
   Data: 0x1  
 Value 1  
   Name: Group  
   Type: REG\_SZ  
   Data: SCSI miniport  
 Value 2  
   Name: Start  
   Type: REG\_DWORD  
   Data: 0x4  
 Value 3  
   Name: Tag  
   Type: REG\_DWORD  
   Data: 0x8  
 Value 4  
   Name: Type  
   Type: REG\_DWORD  
   Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\aic78xx  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:47 PM  
 Value 0  
   Name: ErrorControl  
   Type: REG\_DWORD  
   Data: 0x1  
 Value 1  
   Name: Group  
   Type: REG\_SZ  
   Data: SCSI miniport  
 Value 2  
   Name: ImagePath  
   Type: REG\_EXPAND\_SZ  
   Data: System32\DRIVERS\aic78xx.sys  
 Value 3  
   Name: PlugPlayServiceType  
   Type: REG\_DWORD  
   Data: 0x1  
 Value 4  
   Name: RequestedSystemResources  
   Type: REG\_RESOURCE\_REQUIREMENTS\_LIST  
   Data:

Interface Type: Internal  
 Bus Number: 0  
 Slot Number: 0  
 List 0  
   Descriptor 0  
     Resource: Interrupt  
     Option: 0x00000000  
     Disposition: Shared  
     Type: Level Sensitive  
     Minimum Vector: 0x28  
     Maximum Vector: 0x28  
   Descriptor 1  
     Resource: Port  
     Option: 0x00000001  
     Disposition: Device Exclusive  
     Type: Port  
     Length: 0x100  
     Alignment: 0x100  
     Minimum Address: 0x00002000  
     Maximum Address: 0x000020ff  
   Descriptor 2  
     Resource: Port  
     Option: 0x00000008  
     Disposition: Device Exclusive  
     Type: Port  
     Length: 0x100  
     Alignment: 0x100

Minimum Address: 0x00002000  
Maximum Address: 0x000020ff

Descriptor 3  
Resource: Memory  
Option: 0x00000001  
Disposition: Device Exclusive  
Type: Read / Write  
Length: 0x1000  
Alignment: 0x1000  
Minimum Address: 0xfc000000  
Maximum Address: 0xfc000fff

Descriptor 4  
Resource: Memory  
Option: 0x00000008  
Disposition: Device Exclusive  
Type: Read / Write  
Length: 0x1000  
Alignment: 0x1000  
Minimum Address: 0xfc000000  
Maximum Address: 0xfc000fff

Value 5  
Name: Start  
Type: REG\_DWORD  
Data: 0

Value 6  
Name: Tag  
Type: REG\_DWORD  
Data: 0x1e

Value 7  
Name: Type  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\aic78xx\Enum  
Class Name: <NO CLASS>  
Last Write Time: 6/17/98 - 6:46 PM

Value 0  
Name: 0  
Type: REG\_SZ  
Data: Root\LEGACY\_AIC78XX\0000

Value 1  
Name: Count  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: NextInstance  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\atapi  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0x1

Value 1  
Name: Group  
Type: REG\_SZ  
Data: SCSI miniport

Value 2  
Name: ImagePath  
Type: REG\_EXPAND\_SZ  
Data: System32\DRIVERS\atapi.sys

Value 3  
Name: PlugPlayServiceType  
Type: REG\_DWORD  
Data: 0x1

Value 4  
Name: Start  
Type: REG\_DWORD  
Data: 0

Value 5  
Name: Tag  
Type: REG\_DWORD  
Data: 0x19

Value 6  
Name: Type  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\atapi\Enum  
Class Name: <NO CLASS>  
Last Write Time: 6/17/98 - 6:46 PM

Value 0  
Name: 0  
Type: REG\_SZ  
Data: Root\LEGACY\_ATAPI\0000

Value 1  
Name: Count  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: NextInstance  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Atdisk  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:52 AM

Value 0  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0

Value 1  
Name: Group  
Type: REG\_SZ  
Data: Primary disk

Value 2  
Name: Start  
Type: REG\_DWORD  
Data: 0x4

Value 3  
Name: Tag  
Type: REG\_DWORD  
Data: 0x1

Value 4  
Name: Type  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\ati  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 11:09 AM

Value 0  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0

Value 1  
Name: Group  
Type: REG\_SZ  
Data: Video

Value 2  
Name: Start  
Type: REG\_DWORD  
Data: 0x4

Value 3  
Name: Type  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\ati\Device0  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: BiosClaimSize  
Type: REG\_BINARY  
Data: 00000000 02 00 00 00 .....

Value 1  
Name: InstalledDisplayDrivers  
Type: REG\_MULTI\_SZ  
Data: ati  
8514a

Value 2  
Name: VgaCompatible  
Type: REG\_DWORD  
Data: 0

Key Name: SYSTEM\CurrentControlSet\Services\Browser  
Class Name: <NO CLASS>  
Last Write Time: 6/13/98 - 3:53 PM

Value 0  
Name: DependOnGroup  
Type: REG\_MULTI\_SZ  
Data:

Value 1  
Name: DependOnService  
Type: REG\_MULTI\_SZ  
Data: LanmanWorkstation  
LanmanServer  
LmHosts

Value 2  
Name: DisplayName  
Type: REG\_SZ  
Data: Computer Browser

Value 3  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0x1

Value 4  
Name: ImagePath  
Type: REG\_EXPAND\_SZ  
Data: %SystemRoot%\System32\services.exe

Value 5  
Name: ObjectName  
Type: REG\_SZ  
Data: LocalSystem

Value 6  
Name: Start  
Type: REG\_DWORD  
Data: 0x3

|  |                 |  |  |
|--|-----------------|--|--|
| Value 7  | Name: Type      | Name: Security                                       |  |
|  | Type: REG_DWORD | Type: REG_BINARY                                     |  |
|  | Data: 0x20      | Data:  | 00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00         |
|  |                 |  | .....  |
| Key Name: SYSTEM\CurrentControlSet\Services\Browser\Enum             |                 |  | 00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00         |
| Class Name: <NO CLASS>   |                 |  | .....  |
| Last Write Time: 6/17/98 - 6:46 PM                                   |                 |  | 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00         |
| Value 0  |                 |  | .....  |
| Name: 0  |                 |  | 00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00         |
| Type: REG_SZ   |                 |  | .....  |
| Data: Root\LEGACY_BROWSER\0000                                       |                 |  | 00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00         |
| Value 1  |                 |  | .....  |
| Name: Count  |                 |  | 00000050 01 01 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00         |
| Type: REG_DWORD  |                 |  | .....  |
| Data: 0x1  |                 |  | 00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 00 00 05 ....       |
| Value 2  |                 |  | ...  |
| Name: NextInstance   |                 |  | #.....   |
| Type: REG_DWORD  |                 |  | 00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 05            |
| Data: 0x1  |                 |  | .....  |
| Key Name: SYSTEM\CurrentControlSet\Services\Browser\Linkage          |                 |  | 00000080 20 00 00 00 20 02 00 00 - 00 00 00 05 00 00 1c 00 ...     |
| Class Name: GenericClass   |                 |  | ...  |
| Last Write Time: 6/10/98 - 4:05 AM                                   |                 |  | 00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00         |
| Key Name: SYSTEM\CurrentControlSet\Services\Browser\Linkage\Disabled |                 |  | .....  |
| Class Name: GenericClass   |                 |  | 000000a0 25 02 00 00 00 00 00 05 - 00 00 18 00 fd 01 02 00         |
| Last Write Time: 6/10/98 - 4:05 AM                                   |                 |  | %.....   |
| Key Name: SYSTEM\CurrentControlSet\Services\Browser\Parameters       |                 |  | 000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00         |
| Class Name: GenericClass   |                 |  | .....  |
| Last Write Time: 6/10/98 - 4:05 AM                                   |                 |  | ...%... 000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00 |
| Value 0  |                 |  | .....  |
| Name: IsDomainMaster   |                 |  | 000000d0 00 00 00 05 12 00 00 00 -                                 |
| Type: REG_SZ   |                 |  | .....  |
| Data: FALSE  |                 |  |  |
| Value 1  |                 |  |  |
| Name: MaintainServerList   |                 | Key Name: SYSTEM\CurrentControlSet\Services\Busmouse |  |
| Type: REG_SZ   |                 | Class Name: <NO CLASS>                               |  |
| Data: Auto   |                 | Last Write Time: 10/10/96 - 1:09 AM                  |  |
| Key Name: SYSTEM\CurrentControlSet\Services\Browser\Security         |                 | Value 0  |  |
| Class Name: <NO CLASS>   |                 | Name: ErrorControl                                   |  |
| Last Write Time: 6/10/98 - 4:05 AM                                   |                 | Type: REG_DWORD                                      |  |
| Value 0  |                 | Data: 0  |  |
|  |                 | Value 1  |  |
|  |                 | Name: Group  |  |
|  |                 | Type: REG_SZ   |  |
|  |                 | Data: Pointer Port                                   |  |

```

Value 2
  Name:      Start
  Type:      REG_DWORD
  Data:      0x4

Value 3
  Name:      Tag
  Type:      REG_DWORD
  Data:      0x3

Value 4
  Name:      Type
  Type:      REG_DWORD
  Data:      0x1

Key Name:
SYSTEM\CurrentControlSet\Services\Busmouse\Paramete
  Name:      rs
  Class Name: <NO CLASS>
  Last Write Time: 10/10/96 - 1:09 AM
Value 0
  Name:      MouseDataQueueSize
  Type:      REG_DWORD
  Data:      0x64

Value 1
  Name:      NumberOfButtons
  Type:      REG_DWORD
  Data:      0x2

Value 2
  Name:      PointerDeviceBaseName
  Type:      REG_SZ
  Data:      PointerPort

Value 3
  Name:      SampleRate
  Type:      REG_DWORD
  Data:      0x32

Key Name:      SYSTEM\CurrentControlSet\Services\Cdfs
Class Name:    <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
  Name:      DependOnGroup
  Type:      REG_MULTI_SZ
  Data:      SCSI CDROM Class

Value 1
  Name:      ErrorControl
  Type:      REG_DWORD
  Data:      0x1

Value 2

```

```

Name:      Group
Type:      REG_SZ
Data:      File system

Value 3
  Name:      Start
  Type:      REG_DWORD
  Data:      0x4

Value 4
  Name:      Type
  Type:      REG_DWORD
  Data:      0x2

Key Name:      SYSTEM\CurrentControlSet\Services\Cdfs\Enum
Class Name:    <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value
  Name:      0
  Type:      REG_SZ
  Data:      Root\LEGACY_CDFS\0000

Value 1
  Name:      Count
  Type:      REG_DWORD
  Data:      0x1

Value 2
  Name:      NextInstance
  Type:      REG_DWORD
  Data:      0x1

Key Name:      SYSTEM\CurrentControlSet\Services\Cdrom
Class Name:    <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
  Name:      Autorun
  Type:      REG_DWORD
  Data:      0x1

Value 1
  Name:      DependOnGroup
  Type:      REG_MULTI_SZ
  Data:      SCSI miniport

Value 2
  Name:      ErrorControl
  Type:      REG_DWORD
  Data:      0

Value 3
  Name:      Group
  Type:      REG_SZ
  Data:      SCSI CDROM Class

```

Value 4  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x1

Value 5  
 Name: Tag  
 Type: REG\_DWORD  
 Data: 0x2

Value 6  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Cdrom\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:46 PM

Value 0  
 Name: 0  
 Type: REG\_SZ  
 Data: Root\LEGACY\_CDROM\0000

Value 1  
 Name: Count  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\dac960nt  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:48 PM

Value 0  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 1  
 Name: Group  
 Type: REG\_SZ  
 Data: SCSI miniport

Value 2  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: System32\drivers\dac960nt.sys

Value 3  
 Name: PlugPlayServiceType  
 Type: REG\_DWORD  
 Data: 0x1

Value 4  
 Name: RequestedSystemResources  
 Type: REG\_RESOURCE\_REQUIREMENTS\_LIST  
 Data:

Interface Type: Internal  
 Bus Number: 0  
 Slot Number: 0  
 List 0

Descriptor 0  
 Resource: Interrupt  
 Option: 0x00000000  
 Disposition: Shared  
 Type: Level Sensitive  
 Minimum Vector: 0x20  
 Maximum Vector: 0x20

Descriptor 1  
 Resource: Memory  
 Option: 0x00000001  
 Disposition: Device Exclusive  
 Type: Write Only  
 Length: 0x2000  
 Alignment: 0x2000  
 Minimum Address: 0xfe606000  
 Maximum Address: 0xfe607fff

Descriptor 2  
 Resource: Memory  
 Option: 0x00000009  
 Disposition: Device Exclusive  
 Type: Write Only  
 Length: 0x2000  
 Alignment: 0x2000  
 Minimum Address: 0xfe606000  
 Maximum Address: 0xfe607fff

Value 5  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0

Value 6  
 Name: Tag  
 Type: REG\_DWORD  
 Data: 0x63

Value 7  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\dac960nt\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:46 PM

Value 0

Name: 0  
 Type: REG\_SZ  
 Data: Root\SCSIADAPTER\OEM1.INF&DAC960NT

Value 1  
 Name: Count  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\dce376nt  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Value 0  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 1  
 Name: Group  
 Type: REG\_SZ  
 Data: SCSI miniport

Value 2  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x4

Value 3  
 Name: Tag  
 Type: REG\_DWORD  
 Data: 0x16

Value 4  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\DHCP  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:07 AM

Value 0  
 Name: DependOnGroup  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DependOnService  
 Type: REG\_MULTI\_SZ  
 Data: Tcpip  
 Afd  
 NetBT

Value 2  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: DHCP Client

Value 3  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 4  
 Name: Group  
 Type: REG\_SZ  
 Data: TDI

Value 5  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: %SystemRoot%\System32\services.exe

Value 6  
 Name: ObjectName  
 Type: REG\_SZ  
 Data: LocalSystem

Value 7  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x4

Value 8  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x20

Key Name: SYSTEM\CurrentControlSet\Services\DHCP\Linkage  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\DHCP\Linkage\Disabled  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\DHCP\Parameters  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\DHCP\Parameters\Options  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM



Key Name:  
SYSTEM\CurrentControlSet\Services\DHCP\Parameters\Options\1  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: KeyType  
Type: REG\_DWORD  
Data: 0x7  
Value 1  
Name: RegLocation  
Type: REG\_SZ  
Data:  
System\CurrentControlSet\Services\?\Parameters\Tcpip\DhcpSubnetMaskOpt

Key Name:  
SYSTEM\CurrentControlSet\Services\DHCP\Parameters\Options\15  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: KeyType  
Type: REG\_DWORD  
Data: 0x1  
Value 1  
Name: RegLocation  
Type: REG\_SZ  
Data:  
System\CurrentControlSet\Services\Tcpip\Parameters\DhcpDomain

Key Name:  
SYSTEM\CurrentControlSet\Services\DHCP\Parameters\Options\3  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: KeyType  
Type: REG\_DWORD  
Data: 0x7  
Value 1  
Name: RegLocation  
Type: REG\_SZ  
Data:  
System\CurrentControlSet\Services\?\Parameters\Tcpip\DhcpDefaultGateway

Key Name:  
SYSTEM\CurrentControlSet\Services\DHCP\Parameters\Options\44

Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: KeyType  
Type: REG\_DWORD  
Data: 0x1  
Value 1  
Name: RegLocation  
Type: REG\_SZ  
Data:  
System\CurrentControlSet\Services\NetBT\Adapters\?\DhcpNameServer

Key Name:  
SYSTEM\CurrentControlSet\Services\DHCP\Parameters\Options\46  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: KeyType  
Type: REG\_DWORD  
Data: 0x4  
Value 1  
Name: RegLocation  
Type: REG\_SZ  
Data:  
System\CurrentControlSet\Services\NetBT\Parameters\DhcpNodeType

Key Name:  
SYSTEM\CurrentControlSet\Services\DHCP\Parameters\Options\47  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: KeyType  
Type: REG\_DWORD  
Data: 0x1  
Value 1  
Name: RegLocation  
Type: REG\_SZ  
Data:  
System\CurrentControlSet\Services\NetBT\Parameters\DhcpScopeID

Key Name:  
SYSTEM\CurrentControlSet\Services\DHCP\Parameters\Options\6  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: KeyType

```

Type:          REG_DWORD
Data:          0x1

Value 1
Name:          RegLocation
Type:          REG_SZ
Data:
System\CurrentControlSet\Services\Tcpip\Parameters\
DhcpNameServer

Key Name:      SYSTEM\CurrentControlSet\Services\DHCP\Security
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name:          Security
Type:          REG_BINARY
Data:
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050 20 02 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 c8 00 14 00 ....
...
#.....
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080 20 00 00 00 20 02 00 00 - c8 00 14 00 00 00 1c 00 ...
...
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0 25 02 00 00 c8 00 14 00 - 00 00 18 00 fd 01 02 00
%.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....

```

```

000000d0 00 00 00 05 12 00 00 00 -
.....

Key Name:      SYSTEM\CurrentControlSet\Services\Disk
Class Name:    <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
Name:          DependOnGroup
Type:          REG_MULTI_SZ
Data:          SCSI miniport

Value 1
Name:          ErrorControl
Type:          REG_DWORD
Data:          0

Value 2
Name:          Group
Type:          REG_SZ
Data:          SCSI Class

Value 3
Name:          Start
Type:          REG_DWORD
Data:          0

Value 4
Name:          Tag
Type:          REG_DWORD
Data:          0x2

Value 5
Name:          Type
Type:          REG_DWORD
Data:          0x1

Key Name:      SYSTEM\CurrentControlSet\Services\Disk\Enum
Class Name:    <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0
Name:          0
Type:          REG_SZ
Data:          Root\LEGACY_DISK\0000

Value 1
Name:          Count
Type:          REG_DWORD
Data:          0x1

Value 2
Name:          NextInstance
Type:          REG_DWORD
Data:          0x1

```

Key Name: SYSTEM\CurrentControlSet\Services\Diskperf  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 1:34 PM  
 Value 0  
   Name: ErrorControl  
   Type: REG\_DWORD  
   Data: 0x1  
 Value 1  
   Name: Group  
   Type: REG\_SZ  
   Data: Filter  
 Value 2  
   Name: Start  
   Type: REG\_DWORD  
   Data: 0x4  
 Value 3  
   Name: Tag  
   Type: REG\_DWORD  
   Data: 0x4  
 Value 4  
   Name: Type  
   Type: REG\_DWORD  
   Data: 0x1  
 Key Name: SYSTEM\CurrentControlSet\Services\Diskperf\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:46 PM  
 Value 0  
   Name: 0  
   Type: REG\_SZ  
   Data: Root\LEGACY\_DISKPERF\0000  
 Value 1  
   Name: Count  
   Type: REG\_DWORD  
   Data: 0x1  
 Value 2  
   Name: NextInstance  
   Type: REG\_DWORD  
   Data: 0x1  
 Key Name: SYSTEM\CurrentControlSet\Services\E100B  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:48 PM  
 Value 0  
   Name: DisplayName  
   Type: REG\_SZ  
   Data: Intel EtherExpress PRO Adapter  
 Value 1  
   Name: ErrorControl

Type: REG\_DWORD  
 Data: 0x1  
 Value 2  
   Name: Group  
   Type: REG\_SZ  
   Data: NDIS  
 Value 3  
   Name: ImagePath  
   Type: REG\_EXPAND\_SZ  
   Data: \SystemRoot\System32\drivers\e100bnt.sys  
 Value 4  
   Name: RequestedSystemResources  
   Type: REG\_RESOURCE\_REQUIREMENTS\_LIST  
   Data:  
     Interface Type: Internal  
     Bus Number: 0  
     Slot Number: 0  
     List 0  
       Descriptor 0  
         Resource: Interrupt  
         Option: 0x00000000  
         Disposition: Shared  
         Type: Level Sensitive  
         Minimum Vector: 0x1c  
         Maximum Vector: 0x1c  
       Descriptor 1  
         Resource: Memory  
         Option: 0x00000001  
         Disposition: Device Exclusive  
         Type: Write Only  
         Length: 0x1000  
         Alignment: 0x1000  
         Minimum Address: 0xfe306000  
         Maximum Address: 0xfe306fff  
       Descriptor 2  
         Resource: Memory  
         Option: 0x00000009  
         Disposition: Device Exclusive  
         Type: Write Only  
         Length: 0x1000  
         Alignment: 0x1000  
         Minimum Address: 0xfe306000  
         Maximum Address: 0xfe306fff  
       Descriptor 3  
         Resource: Memory  
         Option: 0x00000008  
         Disposition: Device Exclusive  
         Type: Write Only  
         Length: 0x1000  
         Alignment: 0x1000  
         Minimum Address: 0xfe000000  
         Maximum Address: 0xfe0fffff

```

Descriptor 4
Resource:      Port
Option:       0x00000001
Disposition:  Device Exclusive
Type:        Port
Length:      0x20
Alignment:   0x20
Minimum Address: 0x00003000
Maximum Address: 0x0000301f

Descriptor 5
Resource:      Port
Option:       0x00000008
Disposition:  Device Exclusive
Type:        Port
Length:      0x20
Alignment:   0x20
Minimum Address: 0x00003000
Maximum Address: 0x0000301f

Descriptor 6
Resource:      Memory
Option:       0x00000001
Disposition:  Device Exclusive
Type:        Read / Write
Length:      0x100000
Alignment:   0x100000
Minimum Address: 0xfe000000
Maximum Address: 0xfe0fffff

Descriptor 7
Resource:      Memory
Option:       0x00000008
Disposition:  Device Exclusive
Type:        Read / Write
Length:      0x100000
Alignment:   0x100000
Minimum Address: 0xfe000000
Maximum Address: 0xfe0fffff

```

```

Value 5
Name:      Start
Type:     REG_DWORD
Data:     0x2

```

```

Value 6
Name:      Type
Type:     REG_DWORD
Data:     0x1

```

```

Key Name:      SYSTEM\CurrentControlSet\Services\E100B\Enum
Class Name:    <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0

```

```

Name:          0
Type:         REG_SZ
Data:         Root\LEGACY_E100B\0000

Value 1
Name:         Count
Type:        REG_DWORD
Data:        0x1

Value 2
Name:         NextInstance
Type:        REG_DWORD
Data:        0x1

Key Name:     SYSTEM\CurrentControlSet\Services\E100B\Linkage
Class Name:   GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:        Bind
Type:       REG_MULTI_SZ
Data:       \Device\E100B1

Value 1
Name:        Export
Type:       REG_MULTI_SZ
Data:       \Device\E100B1

Value 2
Name:        Route
Type:       REG_MULTI_SZ
Data:       "E100B1"

Key Name:     SYSTEM\CurrentControlSet\Services\E100B\Linkage\Dis
              abled
Class Name:   GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:        Bind
Type:       REG_MULTI_SZ
Data:

Value 1
Name:        Export
Type:       REG_MULTI_SZ
Data:

Value 2
Name:        Route
Type:       REG_MULTI_SZ
Data:

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\E100B\Parameters
Class Name:      GenericClass
Last Write Time: 6/10/98 - 4:01 AM

Key Name:      SYSTEM\CurrentControlSet\Services\E100B\Security
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 4:01 AM
Value 0
Name:          Security
Type:          REG_BINARY
Data:
00000000  01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010  34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
00000020  ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030  20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040  8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050  73 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
s.....
00000060  00 00 00 05 20 00 00 00 - 23 02 00 00 00 00 b6 80 ....
...
#.....
00000070  00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080  20 00 00 00 20 02 00 00 - 00 00 b6 80 00 00 1c 00 ...
...
00000090  ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0  25 02 00 00 00 00 b6 80 - 00 00 18 00 fd 01 02 00
%.....
000000b0  01 01 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
000000c0  01 01 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....%...
000000d0  00 00 00 05 12 00 00 00 -
.....

Key Name:      SYSTEM\CurrentControlSet\Services\E100B1
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:01 AM

```

```

Value 0
Name:          ErrorControl
Type:          REG_DWORD
Data:          0x1

Value 1
Name:          Start
Type:          REG_DWORD
Data:          0x3

Value 2
Name:          Type
Type:          REG_DWORD
Data:          0x4

Key Name:      SYSTEM\CurrentControlSet\Services\E100B1\Linkage
Class Name:    GenericClass
Last Write Time: 6/17/98 - 6:48 PM
Value 0
Name:          Bind
Type:          REG_MULTI_SZ
Data:          \Device\E100B1

Value 1
Name:          Export
Type:          REG_MULTI_SZ
Data:          \Device\E100B1

Value 2
Name:          Route
Type:          REG_MULTI_SZ
Data:          "E100B1"

Key Name:      SYSTEM\CurrentControlSet\Services\E100B1\Linkage\Di
sabled
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:01 AM

Key Name:      SYSTEM\CurrentControlSet\Services\E100B1\Parameters
Class Name:    GenericClass
Last Write Time: 6/12/98 - 11:46 AM
Value 0
Name:          Adaptive_IFS
Type:          REG_DWORD
Data:          0x1

Value 1
Name:          BusNumber
Type:          REG_DWORD
Data:          0x3

Value 2

```

Name: BusType  
 Type: REG\_DWORD  
 Data: 0x5  
  
 Value 3  
 Name: BusTypeLocal  
 Type: REG\_DWORD  
 Data: 0x5  
  
 Value 4  
 Name: Eid  
 Type: REG\_DWORD  
 Data: 0xc9c545c4  
  
 Value 5  
 Name: ForceDpx  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 6  
 Name: MapRegisters  
 Type: REG\_DWORD  
 Data: 0x40  
  
 Value 7  
 Name: MediaType  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 8  
 Name: MsPciScan  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 9  
 Name: NetworkAddress  
 Type: REG\_SZ  
 Data: 0  
  
 Value 10  
 Name: NumCoalesce  
 Type: REG\_DWORD  
 Data: 0x10  
  
 Value 11  
 Name: NumRfd  
 Type: REG\_DWORD  
 Data: 0x40  
  
 Value 12  
 Name: NumTbdPerTcb  
 Type: REG\_DWORD  
 Data: 0xc  
  
 Value 13  
 Name: NumTcb  
 Type: REG\_DWORD  
 Data: 0x20

Value 14  
 Name: PerfOptims  
 Type: REG\_DWORD  
 Data: 0x2  
  
 Value 15  
 Name: ProposeIAFTAddress  
 Type: REG\_SZ  
 Data: 00A0C9C545C4  
  
 Value 16  
 Name: RxDMACount  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 17  
 Name: RxFifo  
 Type: REG\_DWORD  
 Data: 0x8  
  
 Value 18  
 Name: SlotNumber  
 Type: REG\_DWORD  
 Data: 0x7  
  
 Value 19  
 Name: Speed  
 Type: REG\_DWORD  
 Data: 0x64  
  
 Value 20  
 Name: Threshold  
 Type: REG\_DWORD  
 Data: 0x10  
  
 Value 21  
 Name: TxDMACount  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 22  
 Name: TxFifo  
 Type: REG\_DWORD  
 Data: 0x8  
  
 Value 23  
 Name: Txmitwait  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 24  
 Name: UcodeSW  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 25  
 Name: UnderrunRetry

```

Type:          REG_DWORD
Data:          0x1

Key Name:
SYSTEM\CurrentControlSet\Services\E100B1\Parameters
\Tcpip
Class Name:    GenericClass
Last Write Time: 6/17/98 - 6:48 PM
Value 0
Name:         DefaultGateway
Type:         REG_MULTI_SZ
Data:

Value 1
Name:         EnabledDHCP
Type:         REG_DWORD
Data:         0

Value 2
Name:         IPAddress
Type:         REG_MULTI_SZ
Data:         192.168.91.214

Value 3
Name:         IPInterfaceContext
Type:         REG_DWORD
Data:         0x1

Value 4
Name:         IPInterfaceContextMax
Type:         REG_DWORD
Data:         0x1

Value 5
Name:         LLInterface
Type:         REG_SZ
Data:

Value 6
Name:         PPTPFiltering
Type:         REG_DWORD
Data:         0

Value 7
Name:         RawIPAllowedProtocols
Type:         REG_MULTI_SZ
Data:         0

Value 8
Name:         SubnetMask
Type:         REG_MULTI_SZ
Data:         255.255.255.0

```

```

Value 9
Name:         TCPAllowedPorts
Type:         REG_MULTI_SZ
Data:         0

Value 10
Name:         UDPAllowedPorts
Type:         REG_MULTI_SZ
Data:         0

Value 11
Name:         UseZeroBroadcast
Type:         REG_DWORD
Data:         0

Key Name:     SYSTEM\CurrentControlSet\Services\Floppy
Class Name:   <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
Name:         ErrorControl
Type:         REG_DWORD
Data:         0

Value 1
Name:         Group
Type:         REG_SZ
Data:         Primary disk

Value 2
Name:         Start
Type:         REG_DWORD
Data:         0x1

Value 3
Name:         Tag
Type:         REG_DWORD
Data:         0x2

Value 4
Name:         Type
Type:         REG_DWORD
Data:         0x1

Key Name:     SYSTEM\CurrentControlSet\Services\Floppy\Enum
Class Name:   <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0
Name:         0
Type:         REG_SZ
Data:         Root\LEGACY_FLOPPY\0000

Value 1

```

Name: Count  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Ftdisk  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 8:57 AM

Value 0  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 1  
 Name: Group  
 Type: REG\_SZ  
 Data: Filter

Value 2  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0

Value 3  
 Name: Tag  
 Type: REG\_DWORD  
 Data: 0x3

Value 4  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Ftdisk\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:46 PM

Value 0  
 Name: 0  
 Type: REG\_SZ  
 Data: Root\LEGACY\_FTDISK\0000

Value 1  
 Name: Count  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\LanmanServer  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:07 AM

Value 0  
 Name: DependOnGroup  
 Type: REG\_MULTI\_SZ  
 Data: TDI

Value 1  
 Name: DependOnService  
 Type: REG\_MULTI\_SZ  
 Data:

Value 2  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: Server

Value 3  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 4  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: %SystemRoot%\System32\services.exe

Value 5  
 Name: ObjectName  
 Type: REG\_SZ  
 Data: LocalSystem

Value 6  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x2

Value 7  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x20

Key Name: SYSTEM\CurrentControlSet\Services\LanmanServer\Auto  
 tunedParameters  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\LanmanServer\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:46 PM

Value 0  
 Name: 0  
 Type: REG\_SZ



```

Data:          Root\LEGACY_LANMANSERVER\0000

Value 1
Name:          Count
Type:          REG_DWORD
Data:          0x1

Value 2
Name:          NextInstance
Type:          REG_DWORD
Data:          0x1

Key Name:
SYSTEM\CurrentControlSet\Services\LanmanServer\Link
age
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:          Bind
Type:          REG_MULTI_SZ
Data:          \Device\Nbf_E100B1

Value 1
Name:          Export
Type:          REG_MULTI_SZ
Data:          \Device\LanmanServer\Nbf_E100B1

Value 2
Name:          Route
Type:          REG_MULTI_SZ
Data:          "Nbf" "E100B" "E100B1"

Key Name:
SYSTEM\CurrentControlSet\Services\LanmanServer\Link
age\Disabled
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:          Bind
Type:          REG_MULTI_SZ
Data:          \Device\NetBT_E100B1

Value 1
Name:          Export
Type:          REG_MULTI_SZ
Data:          \Device\LanmanServer\NetBT_E100B1

Value 2
Name:          Route
Type:          REG_MULTI_SZ
Data:          "NetBT" "E100B" "E100B1"

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\LanmanServer\Parameters
Class Name:    GenericClass
Last Write Time: 6/10/98 - 1:04 PM
Value 0
Name:          Lmannounce
Type:          REG_DWORD
Data:          0

Value 1
Name:          NullSessionPipes
Type:          REG_MULTI_SZ
Data:          COMNAP
              COMNODE
              SQL\QUERY
              SPOOLSS
              LLSRPC
              EPMAPPER
              LOCATOR

Value 2
Name:          NullSessionShares
Type:          REG_MULTI_SZ
Data:          COMCFG
              DFS$

Value 3
Name:          Size
Type:          REG_DWORD
Data:          0x3

Key Name:
SYSTEM\CurrentControlSet\Services\LanmanServer\Security
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name:          Security
Type:          REG_BINARY
Data:          00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
              00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
              00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
              00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....

```

```

.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
.....
00000050 20 02 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
.....
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 54 00 00 00 ....
...
#...T...
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
.....
00000080 20 00 00 00 20 02 00 00 - 54 00 00 00 00 00 1c 00 ...
...
T.....
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
.....
000000a0 25 02 00 00 54 00 00 00 - 00 00 18 00 fd 01 02 00
%...T...
.....
.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\LanmanServer\Shares
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\LanmanServer\Shares\Security
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 11:14 AM

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\LanmanWorkstation
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:07 AM

```

```

Value 0
Name: DependOnGroup
Type: REG_MULTI_SZ
Data: TDI

```

```

Value 1
Name: DependOnService
Type: REG_MULTI_SZ
Data:

```

```

Value 2
Name: DisplayName
Type: REG_SZ
Data: Workstation

Value 3
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 4
Name: Group
Type: REG_SZ
Data: NetworkProvider

Value 5
Name: ImagePath
Type: REG_EXPAND_SZ
Data: %SystemRoot%\System32\services.exe

Value 6
Name: ObjectName
Type: REG_SZ
Data: LocalSystem

Value 7
Name: Start
Type: REG_DWORD
Data: 0x2

Value 8
Name: Type
Type: REG_DWORD
Data: 0x20

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\LanmanWorkstation\Enum
Class Name: <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0
Name: 0
Type: REG_SZ
Data: Root\LEGACY_LANMANWORKSTATION\0000

```

```

Value 1
Name: Count
Type: REG_DWORD
Data: 0x1

```

```

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x1

```

Key Name:  
 SYSTEM\CurrentControlSet\Services\LanmanWorkstation  
 \Linkage  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:07 AM  
 Value 0  
 Name: Bind  
 Type: REG\_MULTI\_SZ  
 Data: \Device\Nbf\_E100B1

Value 1  
 Name: Export  
 Type: REG\_MULTI\_SZ  
 Data: \Device\LanmanWorkstation\Nbf\_E100B1

Value 2  
 Name: Route  
 Type: REG\_MULTI\_SZ  
 Data: "Nbf" "E100B" "E100B1"

Key Name:  
 SYSTEM\CurrentControlSet\Services\LanmanWorkstation  
 \Linkage\Disabled  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:07 AM  
 Value 0  
 Name: Bind  
 Type: REG\_MULTI\_SZ  
 Data: \Device\NetBT\_E100B1

Value 1  
 Name: Export  
 Type: REG\_MULTI\_SZ  
 Data: \Device\LanmanWorkstation\NetBT\_E100B1

Value 2  
 Name: Route  
 Type: REG\_MULTI\_SZ  
 Data: "NetBT" "E100B" "E100B1"

Key Name:  
 SYSTEM\CurrentControlSet\Services\LanmanWorkstation  
 \networkprovider  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM  
 Value 0  
 Name: Devicename  
 Type: REG\_SZ  
 Data: \Device\LanmanRedirector

Value 1  
 Name: Name  
 Type: REG\_SZ  
 Data: Microsoft Windows Network

Value 2  
 Name: ProviderPath  
 Type: REG\_EXPAND\_SZ  
 Data: %SystemRoot%\System32\ntlanman.dll

Key Name:  
 SYSTEM\CurrentControlSet\Services\LanmanWorkstation  
 \Parameters  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name:  
 SYSTEM\CurrentControlSet\Services\LanmanWorkstation  
 \Security  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:05 AM

Value 0  
 Name: Security  
 Type: REG\_BINARY  
 Data:  
 00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00  
 .....  
 00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00  
 4.....  
 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
 .....  
 00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00  
 .....  
 00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
 .....  
 00000050 00 01 08 00 00 00 1c 00 - fd 01 02 00 01 02 00 00  
 .....  
 00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 dc d2 14 00 ....  
 ...  
 #.....  
 00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05  
 .....  
 00000080 20 00 00 00 20 02 00 00 - dc d2 14 00 00 00 1c 00 ...  
 ...  
 00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00  
 .....  
 000000a0 25 02 00 00 dc d2 14 00 - 00 00 18 00 fd 01 02 00  
 %.....

```

.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

```

```

Key Name: SYSTEM\CurrentControlSet\Services\LmHosts
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name: DependOnGroup
Type: REG_MULTI_SZ
Data: NetworkProvider

```

```

Value 1
Name: DependOnService
Type: REG_MULTI_SZ
Data:

```

```

Value 2
Name: DisplayName
Type: REG_SZ
Data: TCP/IP NetBIOS Helper

```

```

Value 3
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

```

```

Value 4
Name: ImagePath
Type: REG_EXPAND_SZ
Data: %SystemRoot%\System32\services.exe

```

```

Value 5
Name: ObjectName
Type: REG_SZ
Data: LocalSystem

```

```

Value 6
Name: Start
Type: REG_DWORD
Data: 0x2

```

```

Value 7
Name: Type
Type: REG_DWORD
Data: 0x20

```

```

Key Name: SYSTEM\CurrentControlSet\Services\LmHosts\Enum
Class Name: <NO CLASS>

```

```

Last Write Time: 6/17/98 - 6:46 PM
Value 0
Name: 0
Type: REG_SZ
Data: Root\LEGACY_LMHOSTS\0000

```

```

Value 1
Name: Count
Type: REG_DWORD
Data: 0x1

```

```

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x1

```

```

Key Name: SYSTEM\CurrentControlSet\Services\LmHosts\Linkage
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM

```

```

Key Name: SYSTEM\CurrentControlSet\Services\LmHosts\Linkage\Dis
abled
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM

```

```

Key Name: SYSTEM\CurrentControlSet\Services\LmHosts\Parameter
s
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM

```

```

Key Name: SYSTEM\CurrentControlSet\Services\LmHosts\Security
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM

```

```

Value 0
Name: Security
Type: REG_BINARY
Data:
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
.....

```

```

00000050 00 00 73 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
..S.....
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 c8 00 14 00 ....
...
#.....
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
.....
00000080 20 00 00 00 20 02 00 00 - c8 00 14 00 00 00 1c 00 ...
...
.....
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
.....
000000a0 25 02 00 00 c8 00 14 00 - 00 00 18 00 fd 01 02 00
%.....
.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
.....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

```

```

Key Name: SYSTEM\CurrentControlSet\Services\macdisk
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 11:57 AM
Value 0
  Name: ErrorControl
  Type: REG_DWORD
  Data: 0x1
Value 1
  Name: Group
  Type: REG_SZ
  Data: Filter
Value 2
  Name: ImagePath
  Type: REG_EXPAND_SZ
  Data: System32\drivers\macdisk.sys
Value 3
  Name: PlugPlayServiceType
  Type: REG_DWORD
  Data: 0x1
Value 4
  Name: Start
  Type: REG_DWORD
  Data: 0
Value 5
  Name: Tag

```

```

Type: REG_DWORD
Data: 0x1
Value 6
  Name: Type
  Type: REG_DWORD
  Data: 0x1
Key Name: SYSTEM\CurrentControlSet\Services\macdisk\Enum
Class Name: <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0
  Name: 0
  Type: REG_SZ
  Data: Root\SCSIADAPTER\OEM2.INF&MACDISK
Value 1
  Name: Count
  Type: REG_DWORD
  Data: 0x1
Value 2
  Name: NextInstance
  Type: REG_DWORD
  Data: 0x1

```

```

Key Name: SYSTEM\CurrentControlSet\Services\macdisk\Security
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 11:57 AM
Value 0
  Name: Security
  Type: REG_BINARY
  Data:
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
.....
00000050 46 00 69 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
F.i.....
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 6c 00 74 00 ....
...
#...l.t.

```

```

00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080 20 00 00 00 20 02 00 00 - 6c 00 74 00 00 00 1c 00 ...
...
l.t.....
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0 25 02 00 00 6c 00 74 00 - 00 00 18 00 fd 01 02 00
%...l.t.
.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

Key Name:          SYSTEM\CurrentControlSet\Services\MSDTC\Security
Class Name:        <NO CLASS>
Last Write Time:   6/10/98 - 1:00 PM
Value 0
Name:              Security
Type:              REG_BINARY
Data:
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
.....
00000050 00 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
.....
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 00 00 00 00 ....
...
#......
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
.....
00000080 20 00 00 00 20 02 00 00 - 00 00 00 00 00 00 1c 00 ...
...
.....
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....

```

```

.....
000000a0 25 02 00 00 00 00 00 00 - 00 00 18 00 fd 01 02 00
%.....
.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

Key Name:          SYSTEM\CurrentControlSet\Services\Msfs
Class Name:        <NO CLASS>
Last Write Time:   10/10/96 - 1:09 AM
Value 0
Name:              ErrorControl
Type:              REG_DWORD
Data:              0x1

Value 1
Name:              Group
Type:              REG_SZ
Data:              File system

Value 2
Name:              Start
Type:              REG_DWORD
Data:              0x1

Value 3
Name:              Type
Type:              REG_DWORD
Data:              0x2

Key Name:          SYSTEM\CurrentControlSet\Services\Msfs\Enum
Class Name:        <NO CLASS>
Last Write Time:   6/17/98 - 6:46 PM
Value 0
Name:              0
Type:              REG_SZ
Data:              Root\LEGACY_MSFS\0000

Value 1
Name:              Count
Type:              REG_DWORD
Data:              0x1

Value 2
Name:              NextInstance
Type:              REG_DWORD
Data:              0x1

Key Name:          SYSTEM\CurrentControlSet\Services\MSSQLServer

```

```

Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 1:01 PM
Value 0
  Name: DisplayName
  Type: REG_SZ
  Data: MSSQLServer

Value 1
  Name: ErrorControl
  Type: REG_DWORD
  Data: 0x1

Value 2
  Name: ImagePath
  Type: REG_EXPAND_SZ
  Data: C:\MSSQL7\bin\sqlservr.exe

Value 3
  Name: ObjectName
  Type: REG_SZ
  Data: LocalSystem

Value 4
  Name: Start
  Type: REG_DWORD
  Data: 0x3

Value 5
  Name: Type
  Type: REG_DWORD
  Data: 0x10

Key Name:
SYSTEM\CurrentControlSet\Services\MSSQLServer\Enum
Class Name: <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0
  Name: 0
  Type: REG_SZ
  Data: Root\LEGACY_MSSQLSERVER\0000

Value 1
  Name: Count
  Type: REG_DWORD
  Data: 0x1

Value 2
  Name: NextInstance
  Type: REG_DWORD
  Data: 0x1

Key Name:
SYSTEM\CurrentControlSet\Services\MSSQLServer\Performance
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 1:01 PM

```

```

Value 0
  Name: Close
  Type: REG_SZ
  Data: CloseSQLPerformanceData

Value 1
  Name: Collect
  Type: REG_SZ
  Data: CollectSQLPerformanceData

Value 2
  Name: First Counter
  Type: REG_DWORD
  Data: 0x738

Value 3
  Name: First Help
  Type: REG_DWORD
  Data: 0x739

Value 4
  Name: Last Counter
  Type: REG_DWORD
  Data: 0x80a

Value 5
  Name: Last Help
  Type: REG_DWORD
  Data: 0x80b

Value 6
  Name: Library
  Type: REG_SZ
  Data: SQLCTR70.DLL

Value 7
  Name: Open
  Type: REG_SZ
  Data: OpenSQLPerformanceData

Key Name:
SYSTEM\CurrentControlSet\Services\MSSQLServer\Security
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 1:00 PM
Value
  Name: Security
  Type: REG_BINARY
  Data:
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....

```

```

.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050 4e 00 54 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
N.T.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 5c 00 73 00 ....
...
#...\s.
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080 20 00 00 00 20 02 00 00 - 5c 00 73 00 00 00 1c 00 ...
...
\s.....
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0 25 02 00 00 5c 00 73 00 - 00 00 18 00 fd 01 02 00
%...\s.
.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
...%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

```

```

Key Name: SYSTEM\CurrentControlSet\Services\Nbf
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:06 AM
Value 0
Name: DisplayName
Type: REG_SZ
Data: NetBEUI Protocol

Value 1
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 2
Name: Group
Type: REG_SZ
Data: PNP_TDI

Value 3
Name: ImagePath
Type: REG_EXPAND_SZ
Data: \SystemRoot\System32\drivers\nbf.sys

```

```

Value 4
Name: Start
Type: REG_DWORD
Data: 0x2

Value 5
Name: Type
Type: REG_DWORD
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Nbf\Enum
Class Name: <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0
Name: 0
Type: REG_SZ
Data: Root\LEGACY_NBF\0000

Value 1
Name: Count
Type: REG_DWORD
Data: 0x1

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Nbf\Linkage
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name: Bind
Type: REG_MULTI_SZ
Data: \Device\E100B1

Value 1
Name: Export
Type: REG_MULTI_SZ
Data: \Device\Nbf_E100B1

Value 2
Name: Route
Type: REG_MULTI_SZ
Data: "E100B" "E100B1"

Key Name: SYSTEM\CurrentControlSet\Services\Nbf\Linkage\Disab
led
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name: Bind

```



Type: REG\_MULTI\_SZ  
Data:

Value 1  
Name: Export  
Type: REG\_MULTI\_SZ  
Data:

Value 2  
Name: Route  
Type: REG\_MULTI\_SZ  
Data:

Key Name: SYSTEM\CurrentControlSet\Services\Nbf\Parameters  
Class Name: GenericClass  
Last Write Time: 6/17/98 - 6:48 PM

Value 0  
Name: AddNameQueryRetries  
Type: REG\_DWORD  
Data: 0x3

Value 1  
Name: AddNameQueryTimeout  
Type: REG\_DWORD  
Data: 0x4c4b40

Value 2  
Name: AllRoutesNameRecognized  
Type: REG\_DWORD  
Data: 0

Value 3  
Name: DefaultT1Timeout  
Type: REG\_DWORD  
Data: 0x5b8d80

Value 4  
Name: DefaultT2Timeout  
Type: REG\_DWORD  
Data: 0x16e360

Value 5  
Name: DefaultTiTimeout  
Type: REG\_DWORD  
Data: 0x11e1a300

Value 6  
Name: GeneralRetries  
Type: REG\_DWORD  
Data: 0x3

Value 7  
Name: GeneralTimeout  
Type: REG\_DWORD  
Data: 0x4c4b40

Value 8

Name: LlcMaxWindowSize  
Type: REG\_DWORD  
Data: 0xa

Value 9  
Name: LlcRetries  
Type: REG\_DWORD  
Data: 0x8

Value 10  
Name: MaxAddresses  
Type: REG\_DWORD  
Data: 0

Value 11  
Name: MaxAddressFiles  
Type: REG\_DWORD  
Data: 0

Value 12  
Name: MaxConnections  
Type: REG\_DWORD  
Data: 0

Value 13  
Name: MaximumIncomingFrames  
Type: REG\_DWORD  
Data: 0x4

Value 14  
Name: MaxLinks  
Type: REG\_DWORD  
Data: 0

Value 15  
Name: MaxRequests  
Type: REG\_DWORD  
Data: 0

Value 16  
Name: NameQueryRetries  
Type: REG\_DWORD  
Data: 0x3

Value 17  
Name: NameQueryTimeout  
Type: REG\_DWORD  
Data: 0x4c4b40

Value 18  
Name: NbProvider  
Type: REG\_SZ  
Data: \_nb

Value 19  
Name: QueryWithoutSourceRouting  
Type: REG\_DWORD  
Data: 0

```

Value 20
  Name:      UseDixOverEthernet
  Type:      REG_DWORD
  Data:      0

Value 21
  Name:      WanNameQueryRetries
  Type:      REG_DWORD
  Data:      0x5

Key Name:
SYSTEM\CurrentControlSet\Services\Nbf\Performance
Class Name:  GenericClass
Last Write Time: 6/10/98 - 4:05 AM
Value 0
  Name:      Close
  Type:      REG_SZ
  Data:      CloseNbfPerformanceData

Value 1
  Name:      Collect
  Type:      REG_SZ
  Data:      CollectNbfPerformanceData

Value 2
  Name:      Library
  Type:      REG_SZ
  Data:      Perfctrs.dll

Value 3
  Name:      Open
  Type:      REG_SZ
  Data:      OpenNbfPerformanceData

Key Name:      SYSTEM\CurrentControlSet\Services\Nbf\Security
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
  Name:      Security
  Type:      REG_BINARY
  Data:      01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
  Data:      00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
  Data:      00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
  Data:      00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
  Data:      00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....

```

```

.....
00000050 74 00 42 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
t.B.....
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 54 00 00 00 ....
...
#...T...
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 05
.....
.....
00000080 20 00 00 00 20 02 00 00 - 54 00 00 00 00 00 1c 00 ...
...
T.....
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
.....
000000a0 25 02 00 00 54 00 00 00 - 00 00 18 00 fd 01 02 00
%...T...
.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
.....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

Key Name:      SYSTEM\CurrentControlSet\Services\NDIS
Class Name:    <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
  Name:      DisplayName
  Type:      REG_SZ
  Data:      Microsoft NDIS System Driver

Value 1
  Name:      ErrorControl
  Type:      REG_DWORD
  Data:      0x1

Value 2
  Name:      Group
  Type:      REG_SZ
  Data:      NDIS

Value 3
  Name:      Start
  Type:      REG_DWORD
  Data:      0x1

Value 4
  Name:      Type
  Type:      REG_DWORD
  Data:      0x1

```

```

Key Name:          SYSTEM\CurrentControlSet\Services\NDIS\Enum
Class Name:        <NO CLASS>
Last Write Time:   6/17/98 - 6:46 PM
Value 0
  Name:            0
  Type:            REG_SZ
  Data:            Root\LEGACY_NDIS\0000

Value 1
  Name:            Count
  Type:            REG_DWORD
  Data:            0x1

Value 2
  Name:            NextInstance
  Type:            REG_DWORD
  Data:            0x1

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\MediaTypes
Class Name:        <NO CLASS>
Last Write Time:   10/10/96 - 1:09 AM

Key Name:          SYSTEM\CurrentControlSet\Services\NDIS\NetDetect
Class Name:        <NO CLASS>
Last Write Time:   10/10/96 - 1:09 AM

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
SA
Class Name:        <NO CLASS>
Last Write Time:   10/10/96 - 1:09 AM

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
SA\3C592
Class Name:        <NO CLASS>
Last Write Time:   6/10/98 - 3:56 AM
Value 0
  Name:            Id
  Type:            REG_DWORD
  Data:            0x20596d50

Value 1
  Name:            Mask
  Type:            REG_DWORD
  Data:            0xf0ffffff

Value 2
  Name:            token
  Type:            REG_SZ
  Data:            3C592

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
SA\3C597

```

```

Class Name:        <NO CLASS>
Last Write Time:   6/10/98 - 3:56 AM
Value 0
  Name:            Id
  Type:            REG_DWORD
  Data:            0x70596d50

Value 1
  Name:            Mask
  Type:            REG_DWORD
  Data:            0xf0ffffff

Value 2
  Name:            token
  Type:            REG_SZ
  Data:            3C597

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
SA\BONSAI
Class Name:        <NO CLASS>
Last Write Time:   10/10/96 - 1:09 AM
Value 0
  Name:            Id
  Type:            REG_DWORD
  Data:            0x62110e

Value 1
  Name:            Mask
  Type:            REG_DWORD
  Data:            0xffffffff

Value 2
  Name:            token
  Type:            REG_SZ
  Data:            BONSAI

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
SA\C320TNT
Class Name:        <NO CLASS>
Last Write Time:   6/10/98 - 3:56 AM
Value 0
  Name:            Id
  Type:            REG_DWORD
  Data:            0x32530e

Value 1
  Name:            Mask
  Type:            REG_DWORD
  Data:            0xffffffff

Value 2
  Name:            token
  Type:            REG_SZ
  Data:            C320TNT

```

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\DE425  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x5042a310

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: DE425

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\DEC300  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x230a310

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: DEC300

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\DEC422  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x2042a310

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: DEC422

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\DURANGO  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x260110e

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: DURANGO

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\ELNK3EISA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x90506d50

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: ELNK3EISA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\ES3210  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x12949

```

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xffffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      ES3210

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name: <NO CLASS>
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name:      Id
  Type:      REG_DWORD
  Data:      0x6690e

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xffffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      F70XX

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name: <NO CLASS>
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name:      Id
  Type:      REG_DWORD
  Data:      0x1010d425

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xfffffffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      FL32

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name: <NO CLASS>

```

```

Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name:      Id
  Type:      REG_DWORD
  Data:      0x776d50

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xffffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      FLNK

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name: <NO CLASS>
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name:      Id
  Type:      REG_DWORD
  Data:      0x4019f022

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xf0fffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      J2577A

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name: <NO CLASS>
  Last Write Time: 10/10/96 - 1:09 AM
Value 0
  Name:      Id
  Type:      REG_DWORD
  Data:      0x160110e

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xfffffffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      MAPLE

```

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\NE3200  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x7cc3a  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff  
Value 2  
Name: token  
Type: REG\_SZ  
Data: NE3200

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\NETFLEX3  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x20f1110e  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff  
Value 2  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\NETFLEX3.1  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x40f1110e  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\NETFLX  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x61110e  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NETFLX

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\NF3500  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x84633a  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NF3500

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\NPEISA.1  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: id  
Type: REG\_DWORD  
Data: 0x2093a

```

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xffffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      NPEISA

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name:      <NO CLASS>
  Last Write Time: 10/10/96 - 1:09 AM
Value 0
  Name:      id
  Type:      REG_DWORD
  Data:      0x3093a

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xffffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      NPEISA

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name:      <NO CLASS>
  Last Write Time: 10/10/96 - 1:09 AM
Value 0
  Name:      Id
  Type:      REG_DWORD
  Data:      0x604f42

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xffffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      P1990

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name:      <NO CLASS>
  Last Write Time: 10/10/96 - 1:09 AM

```

```

Value 0
  Name:      Id
  Type:      REG_DWORD
  Data:      0x63110e

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xffffffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      RODAN

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name:      <NO CLASS>
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name:      Id
  Type:      REG_DWORD
  Data:      0x2644d

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      SKETHNT

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI
  Class Name:      <NO CLASS>
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name:      Id
  Type:      REG_DWORD
  Data:      0x1644d

Value 1
  Name:      Mask
  Type:      REG_DWORD
  Data:      0xffff

Value 2
  Name:      token
  Type:      REG_SZ
  Data:      SKFENT

```

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\SMC8232  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x80a34d  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff  
Value 2  
Name: token  
Type: REG\_SZ  
Data: SMC8232

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\TLNK3E  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x9c616d50  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff  
Value 2  
Name: token  
Type: REG\_SZ  
Data: TLNK3E

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\TLNK3EISA  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x90616d50  
Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0ffffff  
Value 2

Name: token  
Type: REG\_SZ  
Data: TLNK3EISA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\AT1700  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x6413

Value 1  
Name: token  
Type: REG\_SZ  
Data: AT1700

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\EE16MC  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x628b

Value 1  
Name: token  
Type: REG\_SZ  
Data: EE16MC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\E1INK527  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x41

Value 1  
Name: token  
Type: REG\_SZ  
Data: E1INK527



Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA  
A\ELNK3MCA.1  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x627c  
Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA  
A\ELNK3MCA.2  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x627d  
Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA  
A\ELNK3MCA.3  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x61db  
Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA  
A\ELNK3MCA.4  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x62f6

Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA  
A\ELNK3MCA.5  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x62f7  
Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA  
A\ELNKMC  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x6042  
Value 1  
Name: token  
Type: REG\_SZ  
Data: ELNKMC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA  
A\F30XX  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x70  
Value 1  
Name: token  
Type: REG\_SZ  
Data: F30XX

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MCA  
A\HPMCA

Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x63ca

Value 1  
Name: token  
Type: REG\_SZ  
Data: HPMCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\IBMENIIN  
<NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xffe0

Value 1  
Name: token  
Type: REG\_SZ  
Data: IBMENIIN

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\IBMTOKA  
<NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xe000

Value 1  
Name: token  
Type: REG\_SZ  
Data: IBMTOKA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\IBMTOKMC  
<NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xe001

Value 1  
Name: token  
Type: REG\_SZ

Data: IBMTOKMC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\IRMAtrac.1  
<NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x5c1c

Value 1  
Name: token  
Type: REG\_SZ  
Data: IRMAtrac

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\IRMAtrac.2  
<NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x5c1d

Value 1  
Name: token  
Type: REG\_SZ  
Data: IRMAtrac

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\NCR TOK  
<NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x100

Value 1  
Name: token  
Type: REG\_SZ  
Data: NCR TOK

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\NPMCA  
<NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id

```

Type:          REG_DWORD
Data:          0x69

Value 1
Name:          token
Type:          REG_SZ
Data:          NPMCA

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC
Class Name:    A\OCTK16.1
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0xa84

Value 1
Name:          token
Type:          REG_SZ
Data:          OCTK16

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC
Class Name:    A\OCTK16.2
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0xa85

Value 1
Name:          token
Type:          REG_SZ
Data:          OCTK16

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC
Class Name:    A\OCTK16.3
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0xa86

Value 1
Name:          token
Type:          REG_SZ
Data:          OCTK16

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC
A\QUADENET.1
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x8f6d

Value 1
Name:          token
Type:          REG_SZ
Data:          QUADENET

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC
A\QUADENET.2
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x8f6a

Value 1
Name:          token
Type:          REG_SZ
Data:          QUADENET

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC
A\SKFMNT.1
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x83

Value 1
Name:          token
Type:          REG_SZ
Data:          SKFMNT

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC
A\SKFMNT.2
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0xab

```

Value 1  
Name: token  
Type: REG\_SZ  
Data: SKFMNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\STREAMER.1  
<NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x8fa0

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\STREAMER.2  
<NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x8fa2

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\STREAMER.3  
<NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x8fa8

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\STREAMER.4  
<NO CLASS>

Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8faa

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\TC\$4046E  
<NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x51

Value 1  
Name: token  
Type: REG\_SZ  
Data: TC\$4046E

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\UBPS  
<NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x7012

Value 1  
Name: token  
Type: REG\_SZ  
Data: UBPS

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC

Class Name: A\WAVELAN\_MCA  
<NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x6a14

Value 1  
Name: token  
Type: REG\_SZ  
Data: WAVELAN\_MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\WD8003EA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x67c0  
Value 1  
Name: token  
Type: REG\_SZ  
Data: WD8003EA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\WD8003WA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x67c2  
Value 1  
Name: token  
Type: REG\_SZ  
Data: WD8003WA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\WD8013EPA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x61c8  
Value 1  
Name: token  
Type: REG\_SZ  
Data: WD8013EPA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\WD8013WPA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD

Data: 0x61c9  
Value 1  
Name: token  
Type: REG\_SZ  
Data: WD8013WPA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\3C590  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x590010b7

Value 1  
Name: token  
Type: REG\_SZ  
Data: 3C590

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\3C595  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x595010b7

Value 1  
Name: token  
Type: REG\_SZ  
Data: 3C595

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\3C905  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x905010b7

Value 1  
Name: token

```

Type:          REG_SZ
Data:          3C905

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\ALANE0
                <NO CLASS>
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x59009004

Value 1
Name:          token
Type:          REG_SZ
Data:          ALANE0

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\AMDPCI
                <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x20001022

Value 1
Name:          token
Type:          REG_SZ
Data:          AMDPCI

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\DC21040
                <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x21011

Value 1
Name:          token
Type:          REG_SZ
Data:          DC21040

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\DC21041
                <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0

```

```

Name:          Id
Type:          REG_DWORD
Data:          0x141011

Value 1
Name:          token
Type:          REG_SZ
Data:          DC21041

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\DC21140
                <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x91011

Value 1
Name:          token
Type:          REG_SZ
Data:          DC21140

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\DC21142
                <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x191011

Value 1
Name:          token
Type:          REG_SZ
Data:          DC21142

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\DEFFPA
                <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0xf1011

Value 1
Name:          token
Type:          REG_SZ
Data:          DEFFPA

```

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\E100BPCI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x12298086

Value 1  
Name: token  
Type: REG\_SZ  
Data: E100BPCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\E10PCI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x12268086

Value 1  
Name: token  
Type: REG\_SZ  
Data: E10PCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCI\LEC  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x100110b6

Value 1  
Name: token  
Type: REG\_SZ  
Data: LEC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCINCPF  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x111bc

Value 1  
Name: token  
Type: REG\_SZ  
Data: NCPF

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCINETFLEX3.1  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xf1300e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCINETFLEX3.2  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae320e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCINETFLEX3.3  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae340e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PCINETFLEX3.4

```

Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name: Id
  Type: REG_DWORD
  Data: 0xae350e11

Value 1
  Name: token
  Type: REG_SZ
  Data: NETFLEX3

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
  Class Name: I\NETFLEX3.5
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name: Id
  Type: REG_DWORD
  Data: 0xae430e11

Value 1
  Name: token
  Type: REG_SZ
  Data: NETFLEX3

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
  Class Name: I\NETFLEX3.6
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name: Id
  Type: REG_DWORD
  Data: 0xae400e11

Value 1
  Name: token
  Type: REG_SZ
  Data: NETFLEX3

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
  Class Name: I\NETFLEX3.7
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name: Id
  Type: REG_DWORD
  Data: 0xf1500e11

Value 1
  Name: token
  Type: REG_SZ

```

```

Data: NETFLEX3

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
  Class Name: I\O100PCI
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name: Id
  Type: REG_DWORD
  Data: 0x11108d

Value 1
  Name: token
  Type: REG_SZ
  Data: O100PCI

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
  Class Name: I\OCE4XMP
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name: Id
  Type: REG_DWORD
  Data: 0x13108d

Value 1
  Name: token
  Type: REG_SZ
  Data: OCE4XMP

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
  Class Name: I\OCTK16
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name: Id
  Type: REG_DWORD
  Data: 0x1108d

Value 1
  Name: token
  Type: REG_SZ
  Data: OCTK16

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
  Class Name: I\RNSFDDI
  Last Write Time: 6/10/98 - 3:56 AM
Value 0
  Name: Id

```



```

Type:          REG_DWORD
Data:          0x22001112

Value 1
Name:          token
Type:          REG_SZ
Data:          RNSFDDI

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\RTL8029
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x802910ec

Value 1
Name:          token
Type:          REG_SZ
Data:          RTL8029

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\SKFPNT
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x40001148

Value 1
Name:          token
Type:          REG_SZ
Data:          SKFPNT

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\SKTOKNT_PCI
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x42001148

Value 1
Name:          token
Type:          REG_SZ
Data:          SKTOKNT_PCI

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC
Class Name:    I\STREAMER
Last Write Time: 6/10/98 - 3:56 AM
Value 0
Name:          Id
Type:          REG_DWORD
Data:          0x181014

Value 1
Name:          token
Type:          REG_SZ
Data:          STREAMER

Key Name:
SYSTEM\CurrentControlSet\Services\NDIS\Parameters
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 2:17 PM
Value 0
Name:          ProcessorAffinityMask
Type:          REG_DWORD
Data:          0

Key Name:
SYSTEM\CurrentControlSet\Services\NetBIOS
Class Name:    <NO CLASS>
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:          DependOnGroup
Type:          REG_MULTI_SZ
Data:          TDI

Value 1
Name:          DependOnService
Type:          REG_MULTI_SZ
Data:

Value 2
Name:          DisplayName
Type:          REG_SZ
Data:          NetBIOS Interface

Value 3
Name:          ErrorControl
Type:          REG_DWORD
Data:          0x1

Value 4
Name:          Group
Type:          REG_SZ
Data:          NetBIOSGroup

Value 5
Name:          ImagePath
Type:          REG_EXPAND_SZ

```

```

Data:          \SystemRoot\System32\drivers\netbios.sys

Value 6
Name:          Start
Type:          REG_DWORD
Data:          0x3

Value 7
Name:          Type
Type:          REG_DWORD
Data:          0x2

Key Name:      SYSTEM\CurrentControlSet\Services\NetBIOS\Enum
Class Name:    <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0
Name:          0
Type:          REG_SZ
Data:          Root\LEGACY_NETBIOS\0000

Value 1
Name:          Count
Type:          REG_DWORD
Data:          0x1

Value 2
Name:          NextInstance
Type:          REG_DWORD
Data:          0x1

Key Name:      SYSTEM\CurrentControlSet\Services\NetBIOS\Linkage
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:          Bind
Type:          REG_MULTI_SZ
Data:          \Device\Nbf_E100B1

Value 1
Name:          Export
Type:          REG_MULTI_SZ
Data:          \Device\Netbios\Nbf_E100B1

Value 2
Name:          LanaMap
Type:          REG_BINARY
Data:          00000000 01 01 ..

Value 3
Name:          Route
Type:          REG_MULTI_SZ
Data:          "Nbf" "E100B" "E100B1"

```

```

Key Name:      SYSTEM\CurrentControlSet\Services\NetBIOS\Linkage\Disab
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:          Bind
Type:          REG_MULTI_SZ
Data:          \Device\NetBT_E100B1

Value 1
Name:          Export
Type:          REG_MULTI_SZ
Data:          \Device\Netbios\NetBT_E100B1

Value 2
Name:          Route
Type:          REG_MULTI_SZ
Data:          "NetBT" "E100B" "E100B1"

```

```

Key Name:      SYSTEM\CurrentControlSet\Services\NetBIOS\Parameters
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:05 AM

```

```

Key Name:      SYSTEM\CurrentControlSet\Services\NetBIOS\Parameters\Winsock
Class Name:    GenericClass
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name:          HelperDllName
Type:          REG_EXPAND_SZ
Data:          %SystemRoot%\system32\wshnetbs.dll

```

```

Value 1
Name:          Mapping
Type:          REG_BINARY
Data:          00000000 02 00 00 00 03 00 00 00 - 11 00 00 00 05 00 00 00
.....
00000010 00 00 00 00 11 00 00 00 - 02 00 00 00 00 00 00 00
.....

```

```

Value 2
Name:          MaxSockAddrLength
Type:          REG_DWORD
Data:          0x14

```

Value 3  
Name: MinSockAddrLength  
Type: REG\_DWORD  
Data: 0x14

Key Name:  
SYSTEM\CurrentControlSet\Services\NetBIOS\Security  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: Security  
Type: REG\_BINARY  
Data:  
00000000 01 00 14 80 cc 00 00 00 - d8 00 00 00 14 00 00 00  
.....  
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00  
4.....  
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
.....  
00000030 20 02 00 00 02 00 98 00 - 06 00 00 00 00 03 18 00  
.....  
00000040 00 00 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
.....  
00000050 00 00 00 00 00 03 18 00 - ff 01 0f 00 01 02 00 00  
.....  
00000060 00 00 00 05 20 00 00 00 - 20 02 00 00 00 03 18 00 ....  
...  
00000070 ff 01 0f 00 01 01 00 00 - 00 00 00 05 12 00 00 00  
.....  
00000080 20 02 00 00 00 03 18 00 - 00 00 02 00 01 02 00 00  
.....  
00000090 00 00 00 05 20 00 00 00 - 23 02 00 00 00 03 18 00 ....  
...  
#. ....  
000000a0 9d 00 00 00 01 01 00 00 - 00 00 00 05 04 00 00 00  
.....  
000000b0 23 02 00 00 00 03 18 00 - 9d 00 00 00 01 02 00 00  
#.....  
000000c0 00 00 00 05 20 00 00 00 - 21 02 00 00 01 01 00 00 ....  
...  
!. ....  
000000d0 00 00 00 05 12 00 00 00 - 01 01 00 00 00 00 00 05  
.....  
000000e0 12 00 00 00 .....

Key Name:  
SYSTEM\CurrentControlSet\Services\NetBIOSInformatio  
n  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0x1  
Value 1  
Name: Start  
Type: REG\_DWORD  
Data: 0x3  
Value 2  
Name: Type  
Type: REG\_DWORD  
Data: 0x4

Key Name:  
SYSTEM\CurrentControlSet\Services\NetBIOSInformatio  
n\Linkage  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\NetBIOSInformatio  
n\Linkage\Disabled  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\NetBIOSInformatio  
n\Parameters  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:07 AM  
Value 0  
Name: EnumExport1  
Type: REG\_DWORD  
Data: 0x1  
Value 1  
Name: EnumExport2  
Type: REG\_DWORD  
Data: 0x1  
Value 2  
Name: LanaNum1  
Type: REG\_DWORD  
Data: 0  
Value 3  
Name: LanaNum2  
Type: REG\_DWORD

Data: 0x1

Value 4  
 Name: MaxLana  
 Type: REG\_DWORD  
 Data: 0x1

Value 5  
 Name: Route  
 Type: REG\_MULTI\_SZ  
 Data: "NetBT" "E100B" "E100B1"  
 "Nbf" "E100B" "E100B1"

Key Name: SYSTEM\CurrentControlSet\Services\NetBT  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:07 AM

Value 0  
 Name: DependOnGroup  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DependOnService  
 Type: REG\_MULTI\_SZ  
 Data: Tcpip

Value 2  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: WINS Client (TCP/IP)

Value 3  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 4  
 Name: Group  
 Type: REG\_SZ  
 Data: PNP\_TDI

Value 5  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: \SystemRoot\System32\drivers\netbt.sys

Value 6  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x2

Value 7  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\NetBT\Adapters  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\NetBT\Adapters\E1  
 Class Name: 00B1  
 GenericClass  
 Last Write Time: 6/10/98 - 4:07 AM

Value 0  
 Name: NameServer  
 Type: REG\_SZ  
 Data:

Value 1  
 Name: NameServerBackup  
 Type: REG\_SZ  
 Data:

Key Name: SYSTEM\CurrentControlSet\Services\NetBT\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:48 PM

Value 0  
 Name: Count  
 Type: REG\_DWORD  
 Data: 0

Value 1  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0

Key Name: SYSTEM\CurrentControlSet\Services\NetBT\Linkage  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:07 AM

Value 0  
 Name: Bind  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: Export  
 Type: REG\_MULTI\_SZ  
 Data:

Value 2  
 Name: OtherDependencies  
 Type: REG\_MULTI\_SZ  
 Data: Tcpip

Value 3  
 Name: Route  
 Type: REG\_MULTI\_SZ

```

Data:

Key Name:
SYSTEM\CurrentControlSet\Services\NetBT\Linkage\Dis
abled
Class Name:      GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:           Bind
Type:           REG_MULTI_SZ
Data:           \Device\E100B1

Value 1
Name:           Export
Type:           REG_MULTI_SZ
Data:           \Device\NetBT_E100B1

Value 2
Name:           Route
Type:           REG_MULTI_SZ
Data:           "E100B" "E100B1"

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\NetBT\Parameters
Class Name:      GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:           BcastNameQueryCount
Type:           REG_DWORD
Data:           0x3

Value 1
Name:           BcastQueryTimeout
Type:           REG_DWORD
Data:           0x2ee

Value 2
Name:           CacheTimeout
Type:           REG_DWORD
Data:           0x927c0

Value 3
Name:           EnableDNS
Type:           REG_DWORD
Data:           0

Value 4
Name:           EnableLMHOSTS
Type:           REG_DWORD
Data:           0x1

Value 5
Name:           EnableProxy

```

```

Type:           REG_DWORD
Data:           0

Value 6
Name:           NameServerPort
Type:           REG_DWORD
Data:           0x89

Value 7
Name:           NameSrvQueryCount
Type:           REG_DWORD
Data:           0x3

Value 8
Name:           NameSrvQueryTimeout
Type:           REG_DWORD
Data:           0x5dc

Value 9
Name:           NbProvider
Type:           REG_SZ
Data:           _tcp

Value 10
Name:           ScopeID
Type:           REG_SZ
Data:

Value 11
Name:           SessionKeepAlive
Type:           REG_DWORD
Data:           0x36ee80

Value 12
Name:           Size/Small/Medium/Large
Type:           REG_DWORD
Data:           0x1

Value 13
Name:           TransportBindName
Type:           REG_SZ
Data:           \Device\

Key Name:       SYSTEM\CurrentControlSet\Services\NetBT\Security
Class Name:     <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name:           Security
Type:           REG_BINARY
Data:           00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
.....

```

```

00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050 01 01 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 00 00 00 05 ....
...
#.....
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080 20 00 00 00 20 02 00 00 - 00 00 00 05 00 00 1c 00 ...
...
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0 25 02 00 00 00 00 00 05 - 00 00 18 00 fd 01 02 00
%.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

```

```

Key Name: SYSTEM\CurrentControlSet\Services\PROSet
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:01 AM

```

```

Key Name: SYSTEM\CurrentControlSet\Services\PROSet\Adapters

```

```

Class Name: GenericClass
Last Write Time: 6/10/98 - 4:01 AM

```

```

Value 0
Name: EPRO100
Type: REG_SZ
Data: Intel EtherExpress PRO Adapter

```

```

Key Name: SYSTEM\CurrentControlSet\Services\PROSet\EPRO100
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:01 AM

```

```

Value 0
Name: AdapterDescription
Type: REG_SZ
Data: EPRO100_GetAdapterDescription

```

```

Value 1
Name: Configure
Type: REG_SZ
Data: EPRO100_Configure

```

```

Value 2
Name: Detect
Type: REG_SZ
Data: EPRO100_Detect

```

```

Value 3
Name: DeviceExist
Type: REG_SZ
Data: EPRO100_DeviceExist

```

```

Value 4
Name: Diagnose
Type: REG_SZ
Data: EPRO100_Diagnose

```

```

Value 5
Name: DLL
Type: REG_SZ
Data: EPRO100.DLL

```

```

Value 6
Name: GetExtendedFeatures
Type: REG_SZ
Data: EPRO100_GetExtendedFeatures

```

```

Value 7
Name: Help
Type: REG_SZ
Data: E100SET.HLP

```

```

Value 8
Name: InstallAnyway
Type: REG_SZ
Data: EPRO100_InstallAnyway

```

```

Value 9
Name: RegistryKey
Type: REG_SZ
Data: EPRO100_GetRegistryKey

```

```

Value 10
Name: Summary
Type: REG_SZ
Data: EPRO100_Resource_Summary

```

```

Key Name: SYSTEM\CurrentControlSet\Services\PROSet\EPRO100\Parameters
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:01 AM
Value 0

```

Name: Adaptive\_IFS  
Type: REG\_SZ  
Data: 1,7,Adaptive Inter-Frame Spacing,0,2,1,0,255,1

Value 1  
Name: BusNumber  
Type: REG\_SZ  
Data: 0,7,BusNumber,0,2,0,0,16,1

Value 2  
Name: BusType  
Type: REG\_SZ  
Data: 0,7,BusType,0,2,5,2,5,1

Value 3  
Name: BusTypeLocal  
Type: REG\_SZ  
Data: 0,7,BusTypeLocal,0,2,5,2,5,1

Value 4  
Name: Eid  
Type: REG\_SZ  
Data: 0,7,Eid,0,2,0,0,4294967295,1

Value 5  
Name: Fifo  
Type: REG\_SZ  
Data: 0,3,Fifo Depth,0,2,12,0,15,1

Value 6  
Name: ForceDpx  
Type: REG\_SZ  
Data: 1,4,Duplex Mode,0,1,Auto,Auto,Half,Full

Value 7  
Name: MapRegisters  
Type: REG\_SZ  
Data:

Value 8  
Name: MediaType  
Type: REG\_SZ  
Data: 0,7,MediaType,0,2,1,1,1,1

Value 9  
Name: MsPciScan  
Type: REG\_SZ  
Data: 0,4,MsPciScan,0,2,1,0,1,1

Value 10  
Name: NetworkAddress  
Type: REG\_SZ  
Data: 1,7,Locally Administered Address,0,5,0,0,1,1

Value 11  
Name: NumCoalesce  
Type: REG\_SZ  
Data: 1,7,Coalesce Buffers,0,2,8,1,32,1

Value 12  
Name: NumRfd  
Type: REG\_SZ  
Data: 1,7,Receive Buffers,0,2,32,1,1024,1

Value 13  
Name: NumTbd  
Type: REG\_SZ  
Data: 0,3,Transmit Buffer Descriptors,0,2,64,1,65535,1

Value 14  
Name: NumTbdPerTcb  
Type: REG\_SZ  
Data: 0,4,Transmit Buffers per Frame,0,2,12,1,16,1

Value 15  
Name: NumTcb  
Type: REG\_SZ  
Data: 1,7,Transmit Control Blocks,0,2,16,1,80,1

Value 16  
Name: Off  
Type: REG\_SZ  
Data: 1,3,Off Timer,0,2,2,1,65535,1

Value 17  
Name: On  
Type: REG\_SZ  
Data: 1,3,On Timer,0,2,32768,1,65535,1

Value 18  
Name: PerfOptims  
Type: REG\_SZ  
Data: 0,4,PerfOptims,0,2,0,0,65535,1

Value 19  
Name: RxDmaCount  
Type: REG\_SZ  
Data: 0,4,RxDmaCount,0,2,0,0,63,1

Value 20  
Name: RxFifo  
Type: REG\_SZ  
Data: 0,4,Receive Fifo Depth,0,2,8,0,15,1

Value 21  
Name: Slot  
Type: REG\_SZ  
Data:

Value 22  
Name: Speed  
Type: REG\_SZ  
Data: 1,7,Network Speed,0,4,Auto,Auto,0,10Mbps,10,100Mbps,100

Value 23  
 Name: Threshold  
 Type: REG\_SZ  
 Data: 0,7,Transmit Threshold,0,2,16,0,200,1

Value 24  
 Name: TxDmaCount  
 Type: REG\_SZ  
 Data: 0,4,TxDmaCount,0,2,0,0,63,1

Value 25  
 Name: TxFifo  
 Type: REG\_SZ  
 Data: 0,4,Transmit Fifo Depth,0,2,8,0,15,1

Value 26  
 Name: Txmitwait  
 Type: REG\_SZ  
 Data: 0,7,Txmitwait,0,2,1,0,255,1

Value 27  
 Name: UcodeSW  
 Type: REG\_SZ  
 Data: 0,7,UcodeSW,0,2,1,0,1,1

Value 28  
 Name: UnderrunRetry  
 Type: REG\_SZ  
 Data: 0,4,UnderrunRetry,0,2,1,0,3,1

Key Name: SYSTEM\CurrentControlSet\Services\SNMP  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:05 AM

Value 0  
 Name: DependOnGroup  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DependOnService  
 Type: REG\_MULTI\_SZ  
 Data: Tcpip  
 EventLog

Value 2  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: SNMP

Value 3  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 4  
 Name: ImagePath

Type: REG\_EXPAND\_SZ  
 Data: %SystemRoot%\System32\snmp.exe

Value 5  
 Name: ObjectName  
 Type: REG\_SZ  
 Data: LocalSystem

Value 6  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x2

Value 7  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x10

Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:46 PM

Value 0  
 Name: 0  
 Type: REG\_SZ  
 Data: Root\LEGACY\_SNMP\0000

Value 1  
 Name: Count  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Linkage  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Linkage\Disabled  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Parameters  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Parameters\EnableAuthenticationTraps  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:05 AM



```

Value 0
  Name: switch
  Type: REG_DWORD
  Data: 0x1

Key Name:
SYSTEM\CurrentControlSet\Services\SNMP\Parameters\ExtensionAgents
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:05 AM
  Value 0
    Name: 1
    Type: REG_SZ
    Data: SOFTWARE\Microsoft\LANManagerMIB2Agent\CurrentVersion

Value 1
  Name: 2
  Type: REG_SZ
  Data: SOFTWARE\Microsoft\RFC1156Agent\CurrentVersion

Key Name:
SYSTEM\CurrentControlSet\Services\SNMP\Parameters\PermittedManagers
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:05 AM

Key Name:
SYSTEM\CurrentControlSet\Services\SNMP\Parameters\RFC1156Agent
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:06 AM
  Value 0
    Name: sysContact
    Type: REG_SZ
    Data: SAM&M

Value 1
  Name: sysLocation
  Type: REG_SZ
  Data: MV Performance Lab

Value 2
  Name: sysServices
  Type: REG_DWORD
  Data: 0x4c

Key Name:
SYSTEM\CurrentControlSet\Services\SNMP\Parameters\TrapConfiguration
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:05 AM

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\SNMP\Parameters\ValidCommunities
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:05 AM
  Value 0
    Name: 1
    Type: REG_SZ
    Data: public

Key Name:
SYSTEM\CurrentControlSet\Services\SNMP\Security
  Class Name: <NO CLASS>
  Last Write Time: 6/10/98 - 4:05 AM
  Value 0
    Name: Security
    Type: REG_BINARY
    Data:
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050 12 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 01 01 00 00 ....
... #.....
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080 20 00 00 00 20 02 00 00 - 01 01 00 00 00 00 1c 00 ...
...
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0 25 02 00 00 01 01 00 00 - 00 00 18 00 fd 01 02 00
%.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....

```

000000d0 00 00 00 05 12 00 00 00 -  
.....

Key Name: SYSTEM\CurrentControlSet\Services\SNMPTRAP  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: DependOnGroup  
Type: REG\_MULTI\_SZ  
Data:

Value 1  
Name: DependOnService  
Type: REG\_MULTI\_SZ  
Data: Tcpip  
EventLog

Value 2  
Name: DisplayName  
Type: REG\_SZ  
Data: SNMP Trap Service

Value 3  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0x1

Value 4  
Name: ImagePath  
Type: REG\_EXPAND\_SZ  
Data: %SystemRoot%\System32\snmptrap.exe

Value 5  
Name: ObjectName  
Type: REG\_SZ  
Data: LocalSystem

Value 6  
Name: Start  
Type: REG\_DWORD  
Data: 0x3

Value 7  
Name: Type  
Type: REG\_DWORD  
Data: 0x10

Key Name: SYSTEM\CurrentControlSet\Services\SNMPTRAP\Linkage  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\SNMPTRAP\Linkage\  
Disabled

Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\SNMPTRAP\Parameters  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\SNMPTRAP\Security  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: Security  
Type: REG\_BINARY  
Data:

00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00  
.....  
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00  
4.....  
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
.....  
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00  
.....  
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
.....  
00000050 ff 01 0f 00 00 00 1c 00 - fd 01 02 00 01 02 00 00  
.....  
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 01 02 00 00 ....  
... #.....  
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05  
.....  
00000080 20 00 00 00 20 02 00 00 - 01 02 00 00 00 00 1c 00 ...  
...  
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00  
.....  
000000a0 25 02 00 00 01 02 00 00 - 00 00 18 00 fd 01 02 00  
%.....  
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00  
.....  
...%...  
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00  
.....  
000000d0 00 00 00 05 12 00 00 00 -  
.....

```

Key Name:          SYSTEM\CurrentControlSet\Services\Sparrow
Class Name:        <NO CLASS>
Last Write Time:   10/10/96 - 1:09 AM
Value 0
  Name:            ErrorControl
  Type:            REG_DWORD
  Data:            0x1
Value 1
  Name:            Group
  Type:            REG_SZ
  Data:            SCSI miniport
Value 2
  Name:            Start
  Type:            REG_DWORD
  Data:            0x4
Value 3
  Name:            Tag
  Type:            REG_DWORD
  Data:            0x7
Value 4
  Name:            Type
  Type:            REG_DWORD
  Data:            0x1
Key Name:          SYSTEM\CurrentControlSet\Services\SQLServerAgent
Class Name:        <NO CLASS>
Last Write Time:   6/10/98 - 1:01 PM
Value 0
  Name:            DependOnGroup
  Type:            REG_MULTI_SZ
  Data:
Value 1
  Name:            DependOnService
  Type:            REG_MULTI_SZ
  Data:            MSSQLServer
Value 2
  Name:            DisplayName
  Type:            REG_SZ
  Data:            SQLServerAgent
Value 3
  Name:            ErrorControl
  Type:            REG_DWORD
  Data:            0x1
Value 4
  Name:            ImagePath
  Type:            REG_EXPAND_SZ

```

```

Data:              C:\MSSQL7\bin\sqlagent.exe
Value 5
  Name:            ObjectName
  Type:            REG_SZ
  Data:            LocalSystem
Value 6
  Name:            Start
  Type:            REG_DWORD
  Data:            0x3
Value 7
  Name:            Type
  Type:            REG_DWORD
  Data:            0x10
Key Name:          SYSTEM\CurrentControlSet\Services\SQLServerAgent\Security
Class Name:        <NO CLASS>
Last Write Time:   6/10/98 - 1:01 PM
Value 0
  Name:            Security
  Type:            REG_BINARY
  Data:
00000000  01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010  34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
00000020  ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030  20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040  8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050  00 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
.....
00000060  00 00 00 05 20 00 00 00 - 23 02 00 00 00 89 ba fd ....
...
#.....
00000070  00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080  20 00 00 00 20 02 00 00 - 00 89 ba fd 00 00 1c 00 ...
...
00000090  ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
.....

```

```

000000a0 25 02 00 00 00 89 ba fd - 00 00 18 00 fd 01 02 00
%.....
.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

```

```

Key Name: SYSTEM\CurrentControlSet\Services\Srv
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name: DisplayName
Type: REG_SZ
Data: Srv

Value 1
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 2
Name: Group
Type: REG_SZ
Data: Network

Value 3
Name: ImagePath
Type: REG_EXPAND_SZ
Data: \SystemRoot\System32\drivers\srv.sys

Value 4
Name: Start
Type: REG_DWORD
Data: 0x3

Value 5
Name: Type
Type: REG_DWORD
Data: 0x2

Key Name: SYSTEM\CurrentControlSet\Services\Srv\Enum
Class Name: <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0
Name: 0
Type: REG_SZ
Data: Root\LEGACY_SRV\0000

Value 1
Name: Count
Type: REG_DWORD

```

```

Data: 0x1

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\Srv\Linkage
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\Srv\Linkage\Disab
led
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\Srv\Parameters
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\Srv\Security
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name: Security
Type: REG_BINARY
Data:
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
.....
00000050 76 00 69 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
v.i.....
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 63 00 65 00 ....
...
#...c.e.
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
.....
00000080 20 00 00 00 20 02 00 00 - 63 00 65 00 00 00 1c 00 ...
...
c.e.....
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....

```

```

.....
000000a0 25 02 00 00 63 00 65 00 - 00 00 18 00 fd 01 02 00
%...c.e.
.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....
....%.
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

```

```

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:06 AM
Value 0
  Name: DisplayName
  Type: REG_SZ
  Data: TCP/IP Service
Value 1
  Name: ErrorControl
  Type: REG_DWORD
  Data: 0x1
Value 2
  Name: Group
  Type: REG_SZ
  Data: PNP_TDI
Value 3
  Name: ImagePath
  Type: REG_EXPAND_SZ
  Data: \SystemRoot\System32\drivers\tcpip.sys
Value 4
  Name: Start
  Type: REG_DWORD
  Data: 0x2
Value 5
  Name: Type
  Type: REG_DWORD
  Data: 0x1
Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Enum
Class Name: <NO CLASS>
Last Write Time: 6/17/98 - 6:46 PM
Value 0
  Name: 0
  Type: REG_SZ
  Data: Root\LEGACY_TCPIP\0000
Value 1
  Name: Count

```

```

Type: REG_DWORD
Data: 0x1
Value 2
  Name: NextInstance
  Type: REG_DWORD
  Data: 0x1
Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Linkage
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
  Name: Bind
  Type: REG_MULTI_SZ
  Data: \Device\E100B1
Value 1
  Name: Export
  Type: REG_MULTI_SZ
  Data: \Device\Tcpip\E100B1
Value 2
  Name: Route
  Type: REG_MULTI_SZ
  Data: "E100B" "E100B1"

```

```

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Linkage\Dis
abled
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
  Name: Bind
  Type: REG_MULTI_SZ
  Data:
Value 1
  Name: Export
  Type: REG_MULTI_SZ
  Data:
Value 2
  Name: Route
  Type: REG_MULTI_SZ
  Data:

```

```

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Parameters
Class Name: GenericClass
Last Write Time: 6/10/98 - 11:28 AM
Value 0
  Name: DataBasePath
  Type: REG_EXPAND_SZ

```

```

Data:                %SystemRoot%\System32\drivers\etc
Value 1
Name:                Domain
Type:                REG_SZ
Data:                mv.unisys.com
Value 2
Name:                EnableSecurityFilters
Type:                REG_DWORD
Data:                0
Value 3
Name:                ForwardBroadcasts
Type:                REG_DWORD
Data:                0
Value 4
Name:                Hostname
Type:                REG_SZ
Data:                avalon4
Value 5
Name:                IPEnableRouter
Type:                REG_DWORD
Data:                0
Value 6
Name:                KeepAliveInterval
Type:                REG_DWORD
Data:                0x2710
Value 7
Name:                NameServer
Type:                REG_SZ
Data:
Value 8
Name:                SearchList
Type:                REG_SZ
Data:
Value 9
Name:                TcpAverageRTT
Type:                REG_DWORD
Data:                0x3e8

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\
PersistentRoutes
Class Name:         GenericClass
Last Write Time:   6/10/98 - 4:05 AM

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\
Winsock
Class Name:         GenericClass

```

```

Last Write Time:   6/10/98 - 4:05 AM
Value 0
Name:                HelperDllName
Type:                REG_EXPAND_SZ
Data:                %SystemRoot%\System32\wshtcpip.dll

```

```

Value 1
Name:                Mapping
Type:                REG_BINARY
Data:                00000000 0b 00 00 00 03 00 00 00 - 02 00 00 00 01 00 00 00
.....
00000010 06 00 00 00 02 00 00 00 - 01 00 00 00 00 00 00 00
.....
00000020 02 00 00 00 00 00 00 00 - 06 00 00 00 00 00 00 00
.....
00000030 00 00 00 00 06 00 00 00 - 00 00 00 00 01 00 00 00
.....
00000040 06 00 00 00 02 00 00 00 - 02 00 00 00 11 00 00 00
.....
00000050 02 00 00 00 02 00 00 00 - 00 00 00 00 02 00 00 00
.....
00000060 00 00 00 00 11 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000070 11 00 00 00 00 00 00 00 - 02 00 00 00 11 00 00 00
.....
00000080 02 00 00 00 03 00 00 00 - 00 00 00 00
.....
.....

```

```

Value 2
Name:                MaxSockAddrLength
Type:                REG_DWORD
Data:                0x10

```

```

Value 3
Name:                MinSockAddrLength
Type:                REG_DWORD
Data:                0x10

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\Tcpip\Performance
Class Name:         GenericClass
Last Write Time:   6/10/98 - 4:05 AM
Value 0
Name:                Close
Type:                REG_SZ
Data:                CloseTcpIpPerformanceData

```

```

Value 1
  Name: Collect
  Type: REG_SZ
  Data: CollectTcpIpPerformanceData

Value 2
  Name: Library
  Type: REG_SZ
  Data: Perfctrs.dll

Value 3
  Name: Open
  Type: REG_SZ
  Data: OpenTcpIpPerformanceData

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Security
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
  Name: Security
  Type: REG_BINARY
  Data:
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050 6d 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
m.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 43 00 48 00 ....
...
#...C.H.
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080 20 00 00 00 20 02 00 00 - 43 00 48 00 00 00 1c 00 ...
...
C.H.....
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0 25 02 00 00 43 00 48 00 - 00 00 18 00 fd 01 02 00
%...C.H.
.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....

```

```

....%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....
000000d0 00 00 00 05 12 00 00 00 -
.....

Key Name:
SYSTEM\CurrentControlSet\Services\Tcpip\ServiceProv
  Name: ServiceProv
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:05 AM
Value 0
  Name: Class
  Type: REG_DWORD
  Data: 0x8

Value 1
  Name: DnsPriority
  Type: REG_DWORD
  Data: 0x7d0

Value 2
  Name: HostsPriority
  Type: REG_DWORD
  Data: 0x1f4

Value 3
  Name: LocalPriority
  Type: REG_DWORD
  Data: 0x1f3

Value 4
  Name: Name
  Type: REG_SZ
  Data: TCP/IP

Value 5
  Name: NetbtPriority
  Type: REG_DWORD
  Data: 0x7d1

Value 6
  Name: ProviderPath
  Type: REG_EXPAND_SZ
  Data: %SystemRoot%\System32\wsock32.dll

Key Name: SYSTEM\CurrentControlSet\Services\UPS
Class Name: <NO CLASS>
Last Write Time: 10/10/96 - 1:09 AM
Value 0
  Name: ErrorControl
  Type: REG_DWORD
  Data: 0x1

Value 1

```

Name: ImagePath  
Type: REG\_EXPAND\_SZ  
Data: %SystemRoot%\System32\ups.exe

Value 2  
Name: ObjectName  
Type: REG\_SZ  
Data: LocalSystem

Value 3  
Name: Start  
Type: REG\_DWORD  
Data: 0x3

Value 4  
Name: Type  
Type: REG\_DWORD  
Data: 0x10

Key Name: SYSTEM\CurrentControlSet\Services\WinSock  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Value 0  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0x1

Value 1  
Name: Start  
Type: REG\_DWORD  
Data: 0x3

Value 2  
Name: Type  
Type: REG\_DWORD  
Data: 0x4

Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Autodial  
Class Name: <NO CLASS>

Last Write Time: 6/10/98 - 11:59 AM

Value 0  
Name: AutodialDllName32  
Type: REG\_SZ  
Data: wininet.dll

Value 1  
Name: AutodialFcnName32  
Type: REG\_SZ  
Data: InternetAutodialCallback

Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Linkage  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Linkage\Dis

Class Name: isabled  
GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Parameter

Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Value 0  
Name: Transports  
Type: REG\_MULTI\_SZ  
Data: Tcpip  
NetBIOS

Mig Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Setup

Class Name: ration  
<NO CLASS>  
Last Write Time: 6/10/98 - 4:07 AM

Value 0  
Name: Known Static Providers  
Type: REG\_MULTI\_SZ  
Data: Tcpip  
NwlnkIpx  
NwlnkSpx  
AppleTalk  
IsoTp

Value 1  
Name: Provider List  
Type: REG\_MULTI\_SZ  
Data: Tcpip  
NetBIOS

Value 2  
Name: Setup Version  
Type: REG\_DWORD  
Data: 0x1009

Mig Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Setup

Class Name: ration\Providers  
<NO CLASS>  
Last Write Time: 6/10/98 - 4:06 AM

Mig Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Setup

Class Name: ration\Providers\NetBIOS  
<NO CLASS>  
Last Write Time: 6/10/98 - 4:07 AM



```

Value 0
  Name:      WinSock 1.1 Provider Data
  Type:      REG_BINARY
  Data:
00000000  0e 10 00 00 11 00 00 00 - 14 00 00 00 14 00 00 00
.....
00000010  05 00 00 00 ff ff ff ff - 00 fa 00 00 66 00 00 00
.....
....f...
00000020  09 12 00 00 11 00 00 00 - 14 00 00 00 14 00 00 00
.....
00000030  02 00 00 00 ff ff ff ff - 00 fa 00 00 40 00 00 00
.....
....@...
00000040  5c 00 44 00 65 00 76 00 - 69 00 63 00 65 00 5c 00
\..D.e.v.
  i.c.e.\.
00000050  4e 00 62 00 66 00 5f 00 - 45 00 31 00 30 00 30 00
N.b.f._.
  E.1.0.0.
00000060  42 00 31 00 00 00 5c 00 - 44 00 65 00 76 00 69 00
B.1...\
  D.e.v.i.
00000070  63 00 65 00 5c 00 4e 00 - 62 00 66 00 5f 00 45 00
c.e.\.N.
  b.f._.E.
00000080  31 00 30 00 30 00 42 00 - 31 00 00 00
1.0.0.B.
  1...

Value 1
  Name:      WinSock 2.0 Provider ID
  Type:      REG_BINARY
  Data:
00000000  30 18 5f 8d 73 c2 cf 11 - 95 c8 00 80 5f 48 a1 92
0._.s...
...._H..

Mig Key Name:      SYSTEM\CurrentControlSet\Services\WinSock\Setup
      Class Name:  ration\Providers\TcPIP
      Last Write Time: 6/10/98 - 4:06 AM
      Value 0
        Name:      WinSock 2.0 Provider ID
        Type:      REG_BINARY
        Data:
00000000  a0 1a 0f e7 8b ab cf 11 - 8c a3 00 80 5f 48 a1 92
.....
...._H..

Mig Key Name:      SYSTEM\CurrentControlSet\Services\WinSock\Setup
      Class Name:  ration\Well Known Guid

```

```

Class Name:      <NO CLASS>
Last Write Time: 6/10/98 - 4:06 AM
Value 0
  Name:      AppleTalk
  Type:      REG_BINARY
  Data:
00000000  a0 17 3b 2c df c6 cf 11 - 95 c8 00 80 5f 48 a1 92
...;....
...._H..

Value 1
  Name:      IsoTp
  Type:      REG_BINARY
  Data:
00000000  b0 cb e4 89 c1 b9 cf 11 - 95 c8 00 80 5f 48 a1 92
.....
...._H..

Value 2
  Name:      McsXns
  Type:      REG_BINARY
  Data:
00000000  b1 cb e4 89 c1 b9 cf 11 - 95 c8 00 80 5f 48 a1 92
.....
...._H..

Key Name:      SYSTEM\CurrentControlSet\Services\WinSock2
Class Name:      <NO CLASS>
Last Write Time: 6/10/98 - 4:01 AM

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete
rs
Class Name:      <NO CLASS>
Last Write Time: 6/10/98 - 4:06 AM
Value 0
  Name:      Current_NameSpace_Catalog
  Type:      REG_SZ
  Data:      NameSpace_Catalog5

Value 1
  Name:      Current_Protocol_Catalog
  Type:      REG_SZ
  Data:      Protocol_Catalog9

Value 2
  Name:      WinSock_Registry_Version
  Type:      REG_SZ
  Data:      2.0

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete
rs\NameSpace_Catalog5
Class Name:      <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0

```

```

Name: Next_Provider_ID
Type: REG_DWORD
Data: 0x7d0

Value 1
Name: Num_Catalog_Entries
Type: REG_DWORD
Data: 0x1

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete
rs\NameSpace_Catalog5\Catalog_Entries
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete
rs\NameSpace_Catalog5\Catalog_Entries\000000000001
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name: DisplayString
Type: REG_SZ
Data: TCP/IP

Value 1
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 2
Name: LibraryPath
Type: REG_SZ
Data: %SystemRoot%\System32\rnr20.dll

Value 3
Name: ProviderId
Type: REG_BINARY
Data: 00000000 40 9d 05 22 9e 7e cf 11 - ae 5a 00 aa 00 a7 11 2b
@..".~..
.Z.....+

Value 4
Name: StoresServiceClassInfo
Type: REG_DWORD
Data: 0x5e7

Value 5
Name: SupportedNameSpace
Type: REG_DWORD
Data: 0xc

Value 6
Name: Version
Type: REG_DWORD

```

```

Data: 0

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete
rs\Protocol_Catalog9
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name: Next_Catalog_Entry_ID
Type: REG_DWORD
Data: 0x3f2

Value 1
Name: Next_Provider_ID
Type: REG_DWORD
Data: 0x1

Value 2
Name: Num_Catalog_Entries
Type: REG_DWORD
Data: 0x5

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete
rs\Protocol_Catalog9\Catalog_Entries
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:07 AM

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete
rs\Protocol_Catalog9\Catalog_Entries\000000000001
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name: PackedCatalogItem
Type: REG_BINARY
Data: 00000000 25 53 79 73 74 65 6d 52 - 6f 6f 74 25 5c 73 79 73
%SystemR
oot%\sys
00000010 74 65 6d 33 32 5c 6d 73 - 61 66 64 2e 64 6c 6c 00
tem32\ms
afd.dll.
00000020 61 66 64 2e 64 6c 6c 00 - 76 00 65 00 72 00 20 00
afd.dll.
v.e.r. .
00000030 6e 00 6f 00 64 00 65 00 - 73 00 2c 00 20 00 66 00
n.o.d.e.
s,. .f.
00000040 6f 00 72 00 20 00 77 00 - 68 00 69 00 63 00 68 00 o.r.
.w.
h.i.c.h.
00000050 20 00 74 00 68 00 65 00 - 72 00 65 00 20 00 61 00
.t.h.e.
r.e. .a.

```

|          |          |   |      |          |   |
|----------|----------|---|------|----------|---|
| .s.      | 00000060 | 72 00 65 00 20 00 73 00 - 65 00 70 00 61 00 72 00 | r.e. | 00000190 | 5b 00 54 00 43 00 50 00 - 2f 00 49 00 50 00 5d 00 |
|          | e.p.a.r. |   |      | [.T.C.P. |   |
| a.t.e.   | 00000070 | 61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00 |      | /.I.P.]  |   |
|          | i.t.e.m. |   |      | 000001a0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| .t.o.    | 00000080 | 73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 | s.   | 000001b0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | .b.e...  |   |      | 000001c0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| .p.      | 00000090 | 0a 00 3b 00 20 00 70 00 - 72 00 65 00 73 00 65 00 | ..;  | 000001d0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | r.e.s.e. |   |      | 000001e0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| n.t.e.d. | 000000a0 | 6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00 |      | 000001f0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | .t.o. .  |   |      | 00000200 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| t.h.e.   | 000000b0 | 74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00 |      | 00000210 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | u.s.e.r. |   |      | 00000220 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| .T.      | 000000c0 | 2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 | .. . | 00000230 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | h.e.s.e. |   |      | 00000240 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| .c.o.m.  | 000000d0 | 20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00 |      | 00000250 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | b.i.n.a. |   |      | 00000260 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| t.i.o.n. | 000000e0 | 74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00 |      | 00000270 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | .n.o.d.  |   |      | 00000280 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| .a.      | 000000f0 | 65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 | e.s. | 00000290 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | r.e. .o. |   |      | 000002a0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| n.l.f... | 00000100 | 6e 00 6c 00 66 00 02 00 - 00 00 00 00 00 00 00 00 |      | 000002b0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | 00000110 | 00 00 00 00 08 00 00 00 - a0 1a 0f e7 8b ab cf 11 |      |          |   |
| ...._H.. | 00000120 | 8c a3 00 80 5f 48 a1 92 - e9 03 00 00 01 00 00 00 |      |          |   |
|          | 00000130 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |      |          |   |
|          | 00000140 | 00 00 00 00 00 00 00 00 - 00 00 00 00 02 00 00 00 |      |          |   |
|          | 00000150 | 02 00 00 00 10 00 00 00 - 10 00 00 00 01 00 00 00 |      |          |   |
|          | 00000160 | 06 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |      |          |   |
|          | 00000170 | 00 00 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00 |      |          |   |
| .T.c.    | M.S.A.F. |   |      |          |   |
|          | 00000180 | 44 00 20 00 54 00 63 00 - 70 00 69 00 70 00 20 00 | D.   |          |   |
|          | p.i.p. . |   |      |          |   |

```

000002c0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002d0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002e0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002f0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000300 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000310 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000320 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000330 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000340 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000350 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000360 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000370 00 00 00 00 00 00 00 00 -
.....

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete

```

```

rs\Protocol_Catalog9\Catalog_Entries\000000000002
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name: PackedCatalogItem
Type: REG_BINARY
Data:
00000000 25 53 79 73 74 65 6d 52 - 6f 6f 74 25 5c 73 79 73
%SystemR
oot%\sys
00000010 74 65 6d 33 32 5c 6d 73 - 61 66 64 2e 64 6c 6c 00
tem32\ms
afd.dll.
00000020 61 66 64 2e 64 6c 6c 00 - 76 00 65 00 72 00 20 00
afd.dll.
v.e.r. .
00000030 6e 00 6f 00 64 00 65 00 - 73 00 2c 00 20 00 66 00
n.o.d.e.

```

```

s...f.
00000040 6f 00 72 00 20 00 77 00 - 68 00 69 00 63 00 68 00 o.r.
.w.
h.i.c.h.
00000050 20 00 74 00 68 00 65 00 - 72 00 65 00 20 00 61 00
.t.h.e.
r.e. .a.
00000060 72 00 65 00 20 00 73 00 - 65 00 70 00 61 00 72 00 r.e.
.s.
e.p.a.r.
00000070 61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00
a.t.e. .
i.t.e.m.
00000080 73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 s.
.t.o.
.b.e...
00000090 0a 00 3b 00 20 00 70 00 - 72 00 65 00 73 00 65 00 .;.
.p.
r.e.s.e.
000000a0 6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00
n.t.e.d.
.t.o. .
000000b0 74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00
t.h.e. .
u.s.e.r.
000000c0 2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 . .
.T.
h.e.s.e.
000000d0 20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00
.c.o.m.
b.i.n.a.
000000e0 74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00
t.i.o.n.
.n.o.d.
000000f0 65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 e.s.
.a.
r.e. .o.
00000100 6e 00 6c 00 09 06 02 00 - 00 00 00 00 00 00 00 00
n.l.....
.....
00000110 00 00 00 00 08 00 00 00 - a0 1a 0f e7 8b ab cf 11
.....
.....
00000120 8c a3 00 80 5f 48 a1 92 - ea 03 00 00 01 00 00 00
...._H..
.....
00000130 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....
00000140 00 00 00 00 00 00 00 00 - 00 00 00 00 02 00 00 00
.....
.....
00000150 02 00 00 00 10 00 00 00 - 10 00 00 00 02 00 00 00
.....
.....
00000160 11 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....

```

```

00000170  bb ff 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00
.....
M.S.A.F.
00000180  44 00 20 00 54 00 63 00 - 70 00 69 00 70 00 20 00  D.
.T.c.
p.i.p. .
00000190  5b 00 55 00 44 00 50 00 - 2f 00 49 00 50 00 5d 00
[.U.D.P.
/.I.P.].
000001a0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000001b0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000001c0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000001d0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000001e0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000001f0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000200  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000210  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000220  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000230  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000240  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000250  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000260  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000270  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000280  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000290  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....

```

```

000002a0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002b0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002c0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002d0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002e0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002f0  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000300  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000310  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000320  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000330  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000340  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000350  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000360  00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000370  00 00 00 00 00 00 00 00 -
.....

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete
rs\Protocol_Catalog9\Catalog_Entries\000000000003
Class Name:      <NO CLASS>
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name:           PackedCatalogItem
Type:           REG_BINARY
Data:
00000000  25 53 79 73 74 65 6d 52 - 6f 6f 74 25 5c 73 79 73
%SystemR
oot%\sys
00000010  74 65 6d 33 32 5c 6d 73 - 61 66 64 2e 64 6c 6c 00
tem32\ms

```

|          |           |   |          |   |
|----------|-----------|---|----------|---|
| afd.dll. | 00000020  | 61 66 64 2e 64 6c 6c 00 - 76 00 65 00 72 00 20 00 | 00000150 | 02 00 00 00 10 00 00 00 - 10 00 00 00 03 00 00 00 |
| afd.dll. | v.e.r. .  |   | 00000160 | 00 00 00 00 ff 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | 00000030  | 6e 00 6f 00 64 00 65 00 - 73 00 2c 00 20 00 66 00 | 00000170 | bb ff 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00 |
| n.o.d.e. | s.,. .f.  |   | M.S.A.F. |   |
|          | 00000040  | 6f 00 72 00 20 00 77 00 - 68 00 69 00 63 00 68 00 | 00000180 | 44 00 20 00 54 00 63 00 - 70 00 69 00 70 00 20 00 |
| .w.      | h.i.c.h.  |   | .T.c.    |   |
|          | 00000050  | 20 00 74 00 68 00 65 00 - 72 00 65 00 20 00 61 00 | p.i.p. . |   |
| .t.h.e.  | r.e. .a.  |   | 00000190 | 5b 00 52 00 41 00 57 00 - 2f 00 49 00 50 00 5d 00 |
|          | 00000060  | 72 00 65 00 20 00 73 00 - 65 00 70 00 61 00 72 00 | [.R.A.W. |   |
| .s.      | e.p.a.r.  |   | /.I.P.]. |   |
|          | 00000070  | 61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00 | 000001a0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| a.t.e.   | i.t.e.m.  |   | 000001b0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | 00000080  | 73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 | 000001c0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| .t.o.    | .b.e... . |   | 000001d0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | 00000090  | 0a 00 3b 00 20 00 70 00 - 72 00 65 00 73 00 65 00 | 000001e0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| .p.      | r.e.s.e.  |   | 000001f0 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | 000000a0  | 6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00 | 00000200 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| n.t.e.d. | .t.o. .   |   | 00000210 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | 000000b0  | 74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00 | 00000220 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| t.h.e.   | u.s.e.r.  |   | 00000230 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | 000000c0  | 2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 | 00000240 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| .T.      | h.e.s.e.  |   | 00000250 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | 000000d0  | 20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00 | 00000260 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
| .c.o.m.  | b.i.n.a.  |   | 00000270 | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |
|          | 000000e0  | 74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00 |          |   |
| t.i.o.n. | .n.o.d.   |   |          |   |
|          | 000000f0  | 65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 |          |   |
| .a.      | r.e. .o.  |   |          |   |
|          | 00000100  | 6e 00 6c 00 09 06 02 00 - 00 00 00 00 00 00 00 00 |          |   |
| n.l..... |           |   |          |   |
|          | 00000110  | 00 00 00 00 0c 00 00 00 - a0 1a 0f e7 8b ab cf 11 |          |   |
| .....    |           |   |          |   |
|          | 00000120  | 8c a3 00 80 5f 48 a1 92 - eb 03 00 00 01 00 00 00 |          |   |
| ...._H.. |           |   |          |   |
|          | 00000130  | 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 |          |   |
| .....    |           |   |          |   |
|          | 00000140  | 00 00 00 00 00 00 00 00 - 00 00 00 00 02 00 00 00 |          |   |
| .....    |           |   |          |   |
| .....    |           |   |          |   |

```

00000280 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000290 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002a0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002b0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002c0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002d0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002e0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002f0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000300 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000310 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000320 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000330 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000340 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000350 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000360 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000370 00 00 00 00 00 00 00 00 -
.....

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete
rs\Protocol_Catalog9\Catalog_Entries\000000000004
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name: PackedCatalogItem
Type: REG_BINARY

```

```

Data:
00000000 25 53 79 73 74 65 6d 52 - 6f 6f 74 25 5c 73 79 73
%SystemR
oot%\sys
00000010 74 65 6d 33 32 5c 6d 73 - 61 66 64 2e 64 6c 6c 00
tem32\ms
afd.dll.
00000020 61 66 64 2e 64 6c 6c 00 - 76 00 65 00 72 00 20 00
afd.dll.
v.e.r. .
00000030 6e 00 6f 00 64 00 65 00 - 73 00 2c 00 20 00 66 00
n.o.d.e.
s.,. .f.
00000040 6f 00 72 00 20 00 77 00 - 68 00 69 00 63 00 68 00 o.r.
.w.
h.i.c.h.
00000050 20 00 74 00 68 00 65 00 - 72 00 65 00 20 00 61 00
.t.h.e.
r.e. .a.
00000060 72 00 65 00 20 00 73 00 - 65 00 70 00 61 00 72 00 r.e.
.s.
e.p.a.r.
00000070 61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00
a.t.e. .
i.t.e.m.
00000080 73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 s.
.t.o.
.b.e...
00000090 0a 00 3b 00 20 00 70 00 - 72 00 65 00 73 00 65 00 .;.
.p.
r.e.s.e.
000000a0 6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00
n.t.e.d.
.t.o. .
000000b0 74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00
t.h.e. .
u.s.e.r.
000000c0 2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 . .
.T.
h.e.s.e.
000000d0 20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00
.c.o.m.
b.i.n.a.
000000e0 74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00
t.i.o.n.
.n.o.d.
000000f0 65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 e.s.
.a.
r.e. .o.
00000100 6e 00 6c 00 0e 00 02 00 - 00 00 00 00 00 00 00 00
n.l.....
.....
00000110 00 00 00 00 00 00 00 00 - 30 18 5f 8d 73 c2 cf 11
.....
0..s...
00000120 95 c8 00 80 5f 48 a1 92 - f0 03 00 00 01 00 00 00
...._H..
.....

```

```

00000130 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000140 00 00 00 00 00 00 00 00 - 00 00 00 00 02 00 00 00
.....
00000150 11 00 00 00 14 00 00 00 - 14 00 00 00 05 00 00 00
.....
00000160 ff ff ff ff 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000170 00 fa 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00
.....
M.S.A.F.
00000180 44 00 20 00 4e 00 65 00 - 74 00 42 00 49 00 4f 00 D.
.N.e.
t.B.I.O.
00000190 53 00 20 00 5b 00 5c 00 - 44 00 65 00 76 00 69 00 S.
.[.\.
D.e.v.i.
000001a0 63 00 65 00 5c 00 4e 00 - 62 00 66 00 5f 00 45 00
c.e.\.N.
b.f._.E.
000001b0 31 00 30 00 30 00 42 00 - 31 00 5d 00 20 00 53 00
1.0.0.B.
1.]. .S.
000001c0 45 00 51 00 50 00 41 00 - 43 00 4b 00 45 00 54 00
E.Q.P.A.
C.K.E.T.
000001d0 20 00 31 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.1.....
000001e0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000001f0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000200 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000210 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000220 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000230 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000240 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000250 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....

```

```

00000260 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000270 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000280 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000290 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002a0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002b0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002c0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002d0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002e0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002f0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000300 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000310 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000320 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000330 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000340 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000350 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000360 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000370 00 00 00 00 00 00 00 00 -
.....

```

Key Name :  
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete



```

rs\Protocol_Catalog9\Catalog_Entries\000000000005
  Class Name:      <NO CLASS>
  Last Write Time: 6/10/98 - 4:07 AM
  Value 0
    Name:          PackedCatalogItem
    Type:          REG_BINARY
    Data:
00000000 25 53 79 73 74 65 6d 52 - 6f 6f 74 25 5c 73 79 73
%SystemR
  oot%\sys
00000010 74 65 6d 33 32 5c 6d 73 - 61 66 64 2e 64 6c 6c 00
tem32\ms
  afd.dll.
00000020 61 66 64 2e 64 6c 6c 00 - 76 00 65 00 72 00 20 00
afd.dll.
  v.e.r. .
00000030 6e 00 6f 00 64 00 65 00 - 73 00 2c 00 20 00 66 00
n.o.d.e.
  s.,. .f.
00000040 6f 00 72 00 20 00 77 00 - 68 00 69 00 63 00 68 00 o.r.
.w.
  h.i.c.h.
00000050 20 00 74 00 68 00 65 00 - 72 00 65 00 20 00 61 00
.t.h.e.
  r.e. .a.
00000060 72 00 65 00 20 00 73 00 - 65 00 70 00 61 00 72 00 r.e.
.s.
  e.p.a.r.
00000070 61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00
a.t.e. .
  i.t.e.m.
00000080 73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 s.
.t.o.
  .b.e...
00000090 0a 00 3b 00 20 00 70 00 - 72 00 65 00 73 00 65 00 ..;.
.p.
  r.e.s.e.
000000a0 6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00
n.t.e.d.
  .t.o. .
000000b0 74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00
t.h.e. .
  u.s.e.r.
000000c0 2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 .. .
.T.
  h.e.s.e.
000000d0 20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00
.c.o.m.
  b.i.n.a.
000000e0 74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00
t.i.o.n.
  .n.o.d.
000000f0 65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 e.s.
.a.
  r.e. .o.
00000100 6e 00 6c 00 09 02 02 00 - 00 00 00 00 00 00 00 00
n.l.....

```

```

.....
00000110 00 00 00 00 00 00 00 00 - 30 18 5f 8d 73 c2 cf 11
.....
0.._s...
00000120 95 c8 00 80 5f 48 a1 92 - f1 03 00 00 01 00 00 00
...._H..
.....
00000130 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....
00000140 00 00 00 00 00 00 00 00 - 00 00 00 00 02 00 00 00
.....
.....
00000150 11 00 00 00 14 00 00 00 - 14 00 00 00 02 00 00 00
.....
.....
00000160 ff ff ff ff 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....
00000170 00 fa 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00
.....
M.S.A.F.
00000180 44 00 20 00 4e 00 65 00 - 74 00 42 00 49 00 4f 00 D.
.N.e.
t.B.I.O.
00000190 53 00 20 00 5b 00 5c 00 - 44 00 65 00 76 00 69 00 S.
.[.\.
D.e.v.i.
000001a0 63 00 65 00 5c 00 4e 00 - 62 00 66 00 5f 00 45 00
c.e.\.N.
b.f._.E.
000001b0 31 00 30 00 30 00 42 00 - 31 00 5d 00 20 00 44 00
1.0.0.B.
1.]. .D.
000001c0 41 00 54 00 41 00 47 00 - 52 00 41 00 4d 00 20 00
A.T.A.G.
R.A.M. .
000001d0 31 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
1.....
.....
000001e0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....
000001f0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....
00000200 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....
00000210 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....
00000220 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....
00000230 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
.....

```

```

00000240 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000250 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000260 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000270 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000280 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000290 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002a0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002b0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002c0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002d0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002e0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
000002f0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000300 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000310 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000320 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000330 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000340 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000350 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....
00000360 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....

```

```

00000370 00 00 00 00 00 00 00 00 -
.....

```

## NT Client Configuration Information

Microsoft Diagnostics Report For \\CLIENT1

### OS Version Report

Microsoft (R) Windows NT (TM) Server  
Version 4.0 (Build 1381: Service Pack 3) x86 Multiprocessor Free  
Registered Owner: Unisys, Unisys  
Product Number: 31797-OEM-0026695-85788

### System Report

System: AT/AT COMPATIBLE  
Hardware Abstraction Layer: MPS 1.4 - APIC platform  
BIOS Date: 10/13/97  
BIOS Version: PhoenixBIOS 4.0 Release 5.10.7

### Processor list:

0: x86 Family 6 Model 3 Stepping 4 GenuineIntel ~299 Mhz  
1: x86 Family 6 Model 3 Stepping 4 GenuineIntel ~299 Mhz

### Video Display Report

BIOS Date: 11/16/95  
BIOS Version: CL-GD5440 VGA BIOS Version 1.06

### Adapter:

Setting: 800 x 600 x 256  
60 Hz  
Type: cirrus compatible display adapter  
String: Cirrus Logic Compatible  
Memory: 2 MB  
Chip Type: CL 5430  
DAC Type: Integrated RAMDAC

### Driver:

Vendor: Microsoft Corporation  
File(s): cirrus.sys, vga.dll, cirrus.dll, vga256.dll, vga64K.dll  
Version: 4.00, 4.0.0

### Drives Report

C:\ (Local - NTFS) Total: 0KB, Free: 0KB  
Serial Number: E80B - 4E03  
Bytes per cluster: 512

Sectors per cluster: 1  
Filename length: 255

Memory Report

-----  
Handles: 993  
Threads: 98  
Processes: 14

Physical Memory (K)  
Total: 261,552  
Available: 216,284  
File Cache: 11,324

Kernel Memory (K)  
Total: 9,240  
Paged: 6,416  
Nonpaged: 2,824

Commit Charge (K)  
Total: 28,908  
Limit: 505,836  
Peak: 28,932

Pagefile Space (K)  
Total: 262,144  
Total in use: 0  
Peak: 0

C:\pagefile.sys  
Total: 262,144  
Total in use: 0  
Peak: 0

Services Report

-----  
Alerter Stopped (Manual)  
C:\WINNT\System32\services.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Service Dependencies:  
LanmanWorkstation  
Computer Browser Running (Automatic)  
C:\WINNT\System32\services.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Service Dependencies:  
LanmanWorkstation  
LanmanServer  
LmHosts  
ClipBook Server Stopped (Manual)  
C:\WINNT\system32\clipsrv.exe  
Service Account Name: LocalSystem  
Error Severity: Normal

Service Flags: Own Process  
Service Dependencies:  
NetDDE  
DHCP Client (TDI) Stopped (Disabled)  
C:\WINNT\System32\services.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Service Dependencies:  
Tcpip  
Afd  
NetBT  
3Com dRMON SmartAgent PC Software Stopped (Manual)  
C:\WINNT\System32\drmon\smartagt\smartagt.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Own Process  
Service Dependencies:  
DTA  
EventLog (Event log) Running (Automatic)  
C:\WINNT\system32\services.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Adaptec Failover Backup Monitor Stopped (Manual)  
C:\WINNT\System32\forbmon.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Own Process  
Server Running (Automatic)  
C:\WINNT\System32\services.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Group Dependencies:  
TDI  
Workstation (NetworkProvider) Running (Automatic)  
C:\WINNT\System32\services.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Group Dependencies:  
TDI  
License Logging Service Stopped (Manual)  
C:\WINNT\System32\llssrv.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Own Process  
TCP/IP NetBIOS Helper Running (Automatic)  
C:\WINNT\System32\services.exe  
Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Group Dependencies:  
NetworkProvider  
Messenger Stopped (Manual)  
C:\WINNT\System32\services.exe  
Service Account Name: LocalSystem

```

Error Severity: Normal
Service Flags: Shared Process
Service Dependencies:
  LanmanWorkstation
  NetBios
Network DDE (NetDDEGroup)           Stopped (Manual)
  C:\WINNT\system32\netdde.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    NetDDESDM
Network DDE DSDM                     Stopped (Manual)
  C:\WINNT\system32\netdde.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Net Logon (RemoteValidation)         Stopped (Manual)
  C:\WINNT\System32\lsass.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
  Service Dependencies:
    LanmanWorkstation
    LmHosts
NT LM Security Support Provider      Stopped (Manual)
  C:\WINNT\System32\SERVICES.EXE
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
OracleClientCache80                 Stopped (Manual)
  C:\ORANT\BIN\ONRSD80.EXE
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Plug and Play (PlugPlay)             Running (Automatic)
  C:\WINNT\system32\services.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Shared Process
Protected Storage                    Running (Automatic)
  C:\WINNT\System32\pstores.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process, Interactive
  Service Dependencies:
    RpcSs
Directory Replicator                 Stopped (Manual)
  C:\WINNT\System32\lmrepl.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
  Service Dependencies:
    LanmanWorkstation
    LanmanServer
Remote Procedure Call (RPC) Locator  Stopped (Manual)
  C:\WINNT\System32\LOCATOR.EXE
  Service Account Name: LocalSystem

```

```

Error Severity: Normal
Service Flags: Own Process
Service Dependencies:
  LanmanWorkstation
  Rdr
Remote Procedure Call (RPC) Service  Running (Automatic)
  C:\WINNT\system32\RpcSs.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Schedule                             Stopped (Manual)
  C:\WINNT\System32\AtSvc.Exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
Spooler (SpoolerGroup)              Stopped (Manual)
  C:\WINNT\system32\spoolss.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process, Interactive
Telephony Service                    Stopped (Manual)
  C:\WINNT\system32\tapisrv.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
TUXEDO IPC Helper                    Running (Automatic)
  C:\TUXEDO\bin\tuxipc.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
TListen (Port: 3050)                 Stopped (Manual)
  C:\TUXEDO\bin\slisten.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
UPS                                  Stopped (Manual)
  C:\WINNT\System32\ups.exe
  Service Account Name: LocalSystem
  Error Severity: Normal
  Service Flags: Own Process
World Wide Web Publishing Service     Stopped (Manual)
  C:\WINNT\System32\inet_srv\inetinfo.exe
  Service Account Name: LocalSystem
  Error Severity: Ignore
  Service Flags: Shared Process
  Service Dependencies:
    RPCSS
    NTLMSSP

Drivers Report
-----
Abiosdsk (Primary disk)              Stopped (Disabled)
  Error Severity: Ignore
  Service Flags: Kernel Driver, Shared Process
AFD Networking Support Environment (TDI) Running (Automatic)
  C:\WINNT\System32\drivers\afd.sys

```

```

Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Ahal154x (SCSI miniport)          Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Ahal174x (SCSI miniport)          Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
aic78xx (SCSI miniport)           Running (Boot)
C:\WINNT\System32\DRIVERS\aic78xx.sys
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Always (SCSI miniport)           Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
ami0nt (SCSI miniport)           Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
amsint (SCSI miniport)           Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Arrow (SCSI miniport)            Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
atapi (SCSI miniport)            Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Atdisk (Primary disk)            Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
ati (Video)                       Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Beep (Base)                       Running (System)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
BusLogic (SCSI miniport)         Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Busmouse (Pointer Port)          Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Cdaudio (Filter)                 Stopped (System)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
CdFs (File system)               Running (Disabled)
Error Severity: Normal
Service Flags: File System Driver, Shared Process
Group Dependencies:
  SCSI CDROM Class
Cdrom (SCSI CDROM Class)          Running (System)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Group Dependencies:
  SCSI miniport
Changer (Filter)                 Stopped (System)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process

```

```

cirrus (Video)                   Running (System)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Cpqarray (SCSI miniport)         Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
cpqfw2e (SCSI miniport)          Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
dac960nt (SCSI miniport)         Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
dce376nt (SCSI miniport)         Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Dellds (SCSI miniport)           Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Dell_DGX (Video)                 Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Disk (SCSI Class)                Running (Boot)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Group Dependencies:
  SCSI miniport
Diskperf (Filter)                Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
DptScsi (SCSI miniport)          Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
DTA (TDI)                         Stopped (Manual)
C:\WINNT\System32\drivers\dtadrv.sys
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
dtt329x (SCSI miniport)          Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
3Com 3C90x Adapter Driver (NDIS) Running (Automatic)
C:\WINNT\System32\drivers\el90x.sys
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Adaptec EMPCI Adapter Driver (NDIS) Running (Automatic)
C:\WINNT\System32\drivers\EMPCI.sys
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
et4000 (Video)                   Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Fastfat (Boot file system)        Stopped (Disabled)
Error Severity: Normal
Service Flags: File System Driver, Shared Process
Fd16_700 (SCSI miniport)         Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Fd7000ex (SCSI miniport)         Stopped (Disabled)
Error Severity: Normal

```

Service Flags: Kernel Driver, Shared Process  
 Fd8xx (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 flashpnt (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Floppy (Primary disk) Running (System)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Ftdisk (Filter) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 i8042 Keyboard and PS/2 Mouse Port Driver (Keyboard Port) Running (System)  
 System32\DRIVERS\i8042prt.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Inport (Pointer Port) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Jazzg300 (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Jazzg364 (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Jzvx1484 (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Keyboard Class Driver (Keyboard Class) Running (System)  
 System32\DRIVERS\kbdclass.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 KSecDD (Base) Running (System)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 mga (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 mga\_mil (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 mitsumi (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 mkecr5xx (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Modem (Extended base) Stopped (Manual)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Mouse Class Driver (Pointer Class) Running (System)  
 System32\DRIVERS\mouclass.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Msfs (File system) Running (System)  
 Error Severity: Normal

Service Flags: File System Driver, Shared Process  
 Mup (Network) Running (Manual)  
 C:\WINNT\System32\drivers\mup.sys  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 NetBEUI Protocol (PNP\_TDI) Running (Automatic)  
 C:\WINNT\System32\drivers\nbf.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Ncr53c9x (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 ncr77c22 (Video) Stopped (Disabled)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Ncrc700 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Ncrc710 (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Microsoft NDIS System Driver (NDIS) Running (System)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 NetBIOS Interface (NetBIOSGroup) Stopped (Manual)  
 C:\WINNT\System32\drivers\netbios.sys  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Group Dependencies:  
 TDI  
 WINS Client (TCP/IP) (PNP\_TDI) Stopped (Automatic)  
 C:\WINNT\System32\drivers\netbt.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
 Tcpip  
 NetDetect Stopped (Manual)  
 C:\WINNT\system32\drivers\netdetect.sys  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Npfs (File system) Running (System)  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Ntfs (File system) Running (Disabled)  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Null (Base) Running (System)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Oliscsi (SCSI miniport) Stopped (Disabled)  
 Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Parallel (Extended base) Running (Automatic)  
 Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
 Parport  
 Group Dependencies:

Parallel arbitrator  
Parport (Parallel arbitrator) Running (Automatic)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
ParVdm (Extended base) Running (Automatic)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Service Dependencies:  
Parport  
Group Dependencies:  
Parallel arbitrator  
PCIDump (PCI Configuration) Stopped (System)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Pcmcia (System Bus Extender) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
PnP ISA Enabler Driver (Base) Stopped (System)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
psidisp (Video) Stopped (Disabled)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Ql10wnt (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
qv (Video) Stopped (Disabled)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Rdr (Network) Running (Manual)  
C:\WINNT\System32\drivers\rdr.sys  
Error Severity: Normal  
Service Flags: File System Driver, Shared Process  
s3 (Video) Stopped (Disabled)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Scsiprnt (Extended base) Stopped (Automatic)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Group Dependencies:  
SCSI miniport  
Scsiscan (SCSI Class) Stopped (System)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Group Dependencies:  
SCSI miniport  
Serial (Extended base) Running (Automatic)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Sermouse (Pointer Port) Stopped (Disabled)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Sfloppy (Primary disk) Stopped (System)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Group Dependencies:  
SCSI miniport  
Simbad (Filter) Stopped (Disabled)

Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
slcd32 (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
Sparrow (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
Spock (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
Srv (Network) Running (Manual)  
C:\WINNT\System32\drivers\srv.sys  
Error Severity: Normal  
Service Flags: File System Driver, Shared Process  
symc810 (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
T128 (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
T13B (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
TCP/IP Service (PNP\_TDI) Running (Automatic)  
C:\WINNT\System32\drivers\tcpip.sys  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
tga (Video) Stopped (Disabled)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
tmv1 (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
Ultra124 (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
Ultra14f (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
Ultra24f (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
v7vram (Video) Stopped (Disabled)  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
VgaSave (Video Save) Stopped (System)  
C:\WINNT\System32\drivers\vga.sys  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
VgaStart (Video Init) Stopped (System)  
C:\WINNT\System32\drivers\vga.sys  
Error Severity: Ignore  
Service Flags: Kernel Driver, Shared Process  
Wd33c93 (SCSI miniport) Stopped (Disabled)  
Error Severity: Normal  
Service Flags: Kernel Driver, Shared Process  
wd90c24a (Video) Stopped (Disabled)

```

Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
wdvga (Video)                Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
weitek9 (Video)              Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Xga (Video)                  Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process

```

IRQ and Port Report

| Devices                 | Vector | Level | Affinity   |
|-------------------------|--------|-------|------------|
| MPS 1.4 - APIC platform | 8      | 8     | 0x00000003 |
| MPS 1.4 - APIC platform | 0      | 0     | 0x00000003 |
| MPS 1.4 - APIC platform | 1      | 1     | 0x00000003 |
| MPS 1.4 - APIC platform | 2      | 2     | 0x00000003 |
| MPS 1.4 - APIC platform | 3      | 3     | 0x00000003 |
| MPS 1.4 - APIC platform | 4      | 4     | 0x00000003 |
| MPS 1.4 - APIC platform | 5      | 5     | 0x00000003 |
| MPS 1.4 - APIC platform | 6      | 6     | 0x00000003 |
| MPS 1.4 - APIC platform | 7      | 7     | 0x00000003 |
| MPS 1.4 - APIC platform | 8      | 8     | 0x00000003 |
| MPS 1.4 - APIC platform | 9      | 9     | 0x00000003 |
| MPS 1.4 - APIC platform | 10     | 10    | 0x00000003 |
| MPS 1.4 - APIC platform | 11     | 11    | 0x00000003 |
| MPS 1.4 - APIC platform | 12     | 12    | 0x00000003 |
| MPS 1.4 - APIC platform | 13     | 13    | 0x00000003 |
| MPS 1.4 - APIC platform | 14     | 14    | 0x00000003 |
| MPS 1.4 - APIC platform | 15     | 15    | 0x00000003 |
| MPS 1.4 - APIC platform | 16     | 16    | 0x00000003 |
| MPS 1.4 - APIC platform | 17     | 17    | 0x00000003 |
| MPS 1.4 - APIC platform | 18     | 18    | 0x00000003 |
| MPS 1.4 - APIC platform | 19     | 19    | 0x00000003 |
| MPS 1.4 - APIC platform | 20     | 20    | 0x00000003 |
| MPS 1.4 - APIC platform | 21     | 21    | 0x00000003 |
| MPS 1.4 - APIC platform | 22     | 22    | 0x00000003 |
| MPS 1.4 - APIC platform | 23     | 23    | 0x00000003 |
| MPS 1.4 - APIC platform | 24     | 24    | 0x00000003 |
| MPS 1.4 - APIC platform | 25     | 25    | 0x00000003 |
| MPS 1.4 - APIC platform | 26     | 26    | 0x00000003 |
| MPS 1.4 - APIC platform | 27     | 27    | 0x00000003 |
| MPS 1.4 - APIC platform | 28     | 28    | 0x00000003 |
| MPS 1.4 - APIC platform | 29     | 29    | 0x00000003 |
| MPS 1.4 - APIC platform | 30     | 30    | 0x00000003 |
| MPS 1.4 - APIC platform | 31     | 31    | 0x00000003 |
| MPS 1.4 - APIC platform | 32     | 32    | 0x00000003 |
| MPS 1.4 - APIC platform | 33     | 33    | 0x00000003 |
| MPS 1.4 - APIC platform | 34     | 34    | 0x00000003 |
| MPS 1.4 - APIC platform | 35     | 35    | 0x00000003 |
| MPS 1.4 - APIC platform | 36     | 36    | 0x00000003 |
| MPS 1.4 - APIC platform | 37     | 37    | 0x00000003 |
| MPS 1.4 - APIC platform | 38     | 38    | 0x00000003 |

|                         |     |     |            |
|-------------------------|-----|-----|------------|
| MPS 1.4 - APIC platform | 39  | 39  | 0x00000003 |
| MPS 1.4 - APIC platform | 40  | 40  | 0x00000003 |
| MPS 1.4 - APIC platform | 41  | 41  | 0x00000003 |
| MPS 1.4 - APIC platform | 42  | 42  | 0x00000003 |
| MPS 1.4 - APIC platform | 43  | 43  | 0x00000003 |
| MPS 1.4 - APIC platform | 44  | 44  | 0x00000003 |
| MPS 1.4 - APIC platform | 45  | 45  | 0x00000003 |
| MPS 1.4 - APIC platform | 46  | 46  | 0x00000003 |
| MPS 1.4 - APIC platform | 47  | 47  | 0x00000003 |
| MPS 1.4 - APIC platform | 61  | 61  | 0x00000003 |
| MPS 1.4 - APIC platform | 65  | 65  | 0x00000003 |
| MPS 1.4 - APIC platform | 80  | 80  | 0x00000003 |
| MPS 1.4 - APIC platform | 193 | 193 | 0x00000003 |
| MPS 1.4 - APIC platform | 225 | 225 | 0x00000003 |
| MPS 1.4 - APIC platform | 253 | 253 | 0x00000003 |
| MPS 1.4 - APIC platform | 254 | 254 | 0x00000003 |
| MPS 1.4 - APIC platform | 255 | 255 | 0x00000003 |
| i8042prt                | 1   | 1   | 0xffffffff |
| i8042prt                | 12  | 12  | 0xffffffff |
| Serial                  | 4   | 4   | 0x00000000 |
| Serial                  | 3   | 3   | 0x00000000 |
| El90x                   | 10  | 10  | 0x00000000 |
| El90x                   | 11  | 11  | 0x00000000 |
| EMPCI                   | 5   | 5   | 0x00000000 |
| EMPCI                   | 5   | 5   | 0x00000000 |
| EMPCI                   | 5   | 5   | 0x00034f7b |
| EMPCI                   | 5   | 5   | 0x00000000 |
| Floppy                  | 6   | 6   | 0x00000000 |
| aic78xx                 | 9   | 9   | 0x00000000 |

| Devices                 | Physical Address | Length       |
|-------------------------|------------------|--------------|
| MPS 1.4 - APIC platform | 0x00000000       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x00000020       | 0x000000002  |
| MPS 1.4 - APIC platform | 0x00000040       | 0x000000004  |
| MPS 1.4 - APIC platform | 0x00000048       | 0x000000004  |
| MPS 1.4 - APIC platform | 0x00000061       | 0x000000001  |
| MPS 1.4 - APIC platform | 0x00000070       | 0x000000002  |
| MPS 1.4 - APIC platform | 0x00000080       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x00000092       | 0x000000001  |
| MPS 1.4 - APIC platform | 0x000000a0       | 0x000000002  |
| MPS 1.4 - APIC platform | 0x000000c0       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x000000d0       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x000000f0       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x00000400       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x00000461       | 0x000000002  |
| MPS 1.4 - APIC platform | 0x00000464       | 0x000000002  |
| MPS 1.4 - APIC platform | 0x00000480       | 0x000000010  |
| MPS 1.4 - APIC platform | 0x000004c2       | 0x00000000e  |
| MPS 1.4 - APIC platform | 0x000004d0       | 0x000000002  |
| MPS 1.4 - APIC platform | 0x000004d4       | 0x000000002c |
| MPS 1.4 - APIC platform | 0x00000c84       | 0x000000001  |
| i8042prt                | 0x00000060       | 0x000000001  |
| i8042prt                | 0x00000064       | 0x000000001  |
| Parport                 | 0x00000378       | 0x000000003  |
| Serial                  | 0x000003f8       | 0x000000007  |
| Serial                  | 0x000002f8       | 0x000000007  |
| El90x                   | 0x0000fc40       | 0x000000040  |



```

El90x          0x0000fcc0 0x00000000040
EMPCI         0x0000ec00 0x00000000080
EMPCI         0x0000e880 0x00000000080
EMPCI         0x0000e800 0x00000000080
EMPCI         0x0000e480 0x00000000080
Floppy        0x000003f0 0x00000000006
Floppy        0x000003f7 0x00000000001
aic78xx       0x0000f800 0x00000000100
cirrus        0x000003b0 0x0000000000c
cirrus        0x000003c0 0x00000000020

```

DMA and Memory Report

```

-----
Devices          Channel      Port
-----
Floppy           2          0
-----
Devices          Physical Address  Length
-----
MPS 1.4 - APIC platform 0xfec00000 0x00000400
MPS 1.4 - APIC platform 0xfeef0000 0x00000400
aic78xx          0xfedff000 0x00001000
cirrus           0x000a0000 0x00020000
cirrus           0xfd000000 0x01000000

```

Environment Report

System Environment Variables

```

APPDIR=c:\tuxedo\runtime
ComSpec=C:\WINNT\system32\cmd.exe
LIBPATH=c:\tuxedo\lib
NUMBER_OF_PROCESSORS=2
OS=Windows_NT
Os2LibPath=C:\WINNT\system32\os2\dll;

Path=C:\WINNT\system32;C:\WINNT;C:\MSSQL7\BINN;C:\TUXEDO\bin;C:\ORANT\BIN
PROCESSOR_ARCHITECTURE=x86
PROCESSOR_IDENTIFIER=x86 Family 6 Model 3 Stepping 4, GenuineIntel
PROCESSOR_LEVEL=6
PROCESSOR_REVISION=0304
TMCONTEXTS=1
TUXCONFIG=c:\tuxedo\runtime\tuxconfig
TUXDIR=c:\tuxedo
windir=C:\WINNT

```

Environment Variables for Current User

```

TEMP=C:\TEMP
TMP=C:\TEMP

```

Network Report

```

-----
Your Access Level: Admin & Local
Workgroup or Domain: WORKGROUP
Network Version: 4.0
LanRoot: WORKGROUP
Logged On Users: 1
Current User (1): Administrator
  Logon Domain: CLIENT1
  Logon Server: CLIENT1

Transport: Nbf_El90x1, 00-10-4B-9D-F5-A7, VC's: 0, Wan: Wan
Transport: Nbf_El90x2, 00-10-4B-9D-F5-B5, VC's: 1, Wan: Wan
Transport: Nbf_EMPCI3, 00-00-92-A7-76-CC, VC's: 1, Wan: Wan
Transport: Nbf_EMPCI4, 00-00-92-A7-76-CD, VC's: 1, Wan: Wan
Transport: Nbf_EMPCI5, 00-00-92-A7-76-CE, VC's: 1, Wan: Wan
Transport: Nbf_EMPCI6, 00-00-92-A7-76-CF, VC's: 1, Wan: Wan

```

```

Character Wait: 3,600
Collection Time: 250
Maximum Collection Count: 16
Keep Connection: 600
Maximum Commands: 5
Session Time Out: 45
Character Buffer Size: 512
Maximum Threads: 17
Lock Quota: 6,144
Lock Increment: 10
Maximum Locks: 500
Pipe Increment: 10
Maximum Pipes: 500
Cache Time Out: 40
Dormant File Limit: 45
Read Ahead Throughput: 4,294,967,295
Mailslot Buffers: 3
Server Announce Buffers: 20
Illegal Datagrams: 5
Datagram Reset Frequency: 60
Log Election Packets: False
Use Opportunistic Locking: True
Use Unlock Behind: True
Use Close Behind: True
Buffer Pipes: True
Use Lock, Read, Unlock: True
Use NT Caching: True
Use Raw Read: True
Use Raw Write: True
Use Write Raw Data: True
Use Encryption: True
Buffer Deny Write Files: True
Buffer Read Only Files: True
Force Core Creation: True
512 Byte Max Transfer: False
Bytes Received: 10,499
SMB's Received: 113
Paged Read Bytes Requested: 0

```

Non Paged Read Bytes Requested: 0  
 Cache Read Bytes Requested: 0  
 Network Read Bytes Requested: 0  
 Bytes Transmitted: 13,155  
 SMB's Transmitted: 113  
 Paged Read Bytes Requested: 0  
 Non Paged Read Bytes Requested: 0  
 Cache Read Bytes Requested: 0  
 Network Read Bytes Requested: 0  
 Initially Failed Operations: 0  
 Failed Completion Operations: 0  
 Read Operations: 0  
 Random Read Operations: 0  
 Read SMB's: 0  
 Large Read SMB's: 0  
 Small Read SMB's: 0  
 Write Operations: 0  
 Random Write Operations: 0  
 Write SMB's: 0  
 Large Write SMB's: 0  
 Small Write SMB's: 0  
 Raw Reads Denied: 0  
 Raw Writes Denied: 0  
 Network Errors: 0  
 Sessions: 21  
 Failed Sessions: 0  
 Reconnects: 0  
 Core Connects: 0  
 LM 2.0 Connects: 0  
 LM 2.x Connects: 0  
 Windows NT Connects: 21  
 Server Disconnects: 0  
 Hung Sessions: 0  
 Use Count: 40  
 Failed Use Count: 0  
 Current Commands: 0  
 Server File Opens: 11  
 Server Device Opens: 0  
 Server Jobs Queued: 0  
 Server Session Opens: 1  
 Server Sessions Timed Out: 2  
 Server Sessions Errored Out: 2  
 Server Password Errors: 0  
 Server Permission Errors: 0  
 Server System Errors: 0  
 Server Bytes Sent: 1,490,204  
 Server Bytes Received: 8,088  
 Server Average Response Time: 0  
 Server Request Buffers Needed: 0  
 Server Big Buffers Needed: 0

## Internet Information Server Registry Parameters

Key Name: SYSTEM\CurrentControlSet\Services\InetInfo  
 Class Name: <NO CLASS>

Last Write Time: 5/29/98 - 2:57 AM  
 Key Name: SYSTEM\CurrentControlSet\Services\InetInfo\Parameters  
 Class Name: <NO CLASS>  
 Last Write Time: 9/16/98 - 10:35 AM  
 Value 0  
 Name: BandwidthLevel  
 Type: REG\_DWORD  
 Data: 0xffffffff  
 Value 1  
 Name: DisableMemoryCache  
 Type: REG\_DWORD  
 Data: 0x1  
 Value 2  
 Name: ListenBackLog  
 Type: REG\_DWORD  
 Data: 0x19  
 Value 3  
 Name: MemoryCacheSize  
 Type: REG\_DWORD  
 Data: 0  
 Value 4  
 Name: ObjectCacheTTL  
 Type: REG\_DWORD  
 Data: 0xffffffff  
 Value 5  
 Name: PoolThreadLimit  
 Type: REG\_DWORD  
 Data: 0xaa  
 Key Name: SYSTEM\CurrentControlSet\Services\InetInfo\Parameters\Filter  
 Class Name: <NO CLASS>  
 Last Write Time: 5/29/98 - 2:57 AM  
 Value 0  
 Name: FilterType  
 Type: REG\_DWORD  
 Data: 0  
 Value 1  
 Name: NumDenySites  
 Type: REG\_DWORD  
 Data: 0  
 Value 2  
 Name: NumGrantSites  
 Type: REG\_DWORD  
 Data: 0  
 Key Name: SYSTEM\CurrentControlSet\Services\InetInfo\Parameters\MimeMap

Class Name: <NO CLASS>  
 Last Write Time: 5/29/98 - 2:57 AM  
 Value 0  
   Name: application/envoy, evy, , 5  
   Type: REG\_SZ  
   Data:  
 Value 1  
   Name: application/mac-binhex40, hqx, , 4  
   Type: REG\_SZ  
   Data:  
 Value 2  
   Name: application/msword, doc, , 5  
   Type: REG\_SZ  
   Data:  
 Value 3  
   Name: application/msword, dot, , 5  
   Type: REG\_SZ  
   Data:  
 Value 4  
   Name: application/octet-stream, \*, , 5  
   Type: REG\_SZ  
   Data:  
 Value 5  
   Name: application/octet-stream, bin, , 5  
   Type: REG\_SZ  
   Data:  
 Value 6  
   Name: application/octet-stream, exe, , 5  
   Type: REG\_SZ  
   Data:  
 Value 7  
   Name: application/oda, oda, , 5  
   Type: REG\_SZ  
   Data:  
 Value 8  
   Name: application/pdf, pdf, , 5  
   Type: REG\_SZ  
   Data:  
 Value 9  
   Name: application/postscript, ai, , 5  
   Type: REG\_SZ  
   Data:  
 Value 10  
   Name: application/postscript, eps, , 5  
   Type: REG\_SZ  
   Data:  
 Value 11

Name: application/postscript, ps, , 5  
 Type: REG\_SZ  
 Data:  
 Value 12  
   Name: application/rtf, rtf, , 5  
   Type: REG\_SZ  
   Data:  
 Value 13  
   Name: application/winhelp, hlp, , 5  
   Type: REG\_SZ  
   Data:  
 Value 14  
   Name: application/x-bcpio, bcpio, , 5  
   Type: REG\_SZ  
   Data:  
 Value 15  
   Name: application/x-cpio, cpio, , 5  
   Type: REG\_SZ  
   Data:  
 Value 16  
   Name: application/x-csh, csh, , 5  
   Type: REG\_SZ  
   Data:  
 Value 17  
   Name: application/x-director, dcr, , 5  
   Type: REG\_SZ  
   Data:  
 Value 18  
   Name: application/x-director, dir, , 5  
   Type: REG\_SZ  
   Data:  
 Value 19  
   Name: application/x-director, dxr, , 5  
   Type: REG\_SZ  
   Data:  
 Value 20  
   Name: application/x-dvi, dvi, , 5  
   Type: REG\_SZ  
   Data:  
 Value 21  
   Name: application/x-gtar, gtar, , 9  
   Type: REG\_SZ  
   Data:  
 Value 22  
   Name: application/x-hdf, hdf, , 5  
   Type: REG\_SZ  
   Data:

Value 23  
 Name: application/x-latex,latex,,5  
 Type: REG\_SZ  
 Data:

Value 24  
 Name: application/x-msaccess,mdb,,5  
 Type: REG\_SZ  
 Data:

Value 25  
 Name: application/x-mscardfile,crd,,5  
 Type: REG\_SZ  
 Data:

Value 26  
 Name: application/x-msclip,clip,,5  
 Type: REG\_SZ  
 Data:

Value 27  
 Name: application/x-msexcel,xla,,5  
 Type: REG\_SZ  
 Data:

Value 28  
 Name: application/x-msexcel,xlc,,5  
 Type: REG\_SZ  
 Data:

Value 29  
 Name: application/x-msexcel,xlm,,5  
 Type: REG\_SZ  
 Data:

Value 30  
 Name: application/x-msexcel,xls,,5  
 Type: REG\_SZ  
 Data:

Value 31  
 Name: application/x-msexcel,xlt,,5  
 Type: REG\_SZ  
 Data:

Value 32  
 Name: application/x-msexcel,xlw,,5  
 Type: REG\_SZ  
 Data:

Value 33  
 Name: application/x-msmediaview,m13,,5  
 Type: REG\_SZ  
 Data:

Value 34  
 Name: application/x-msmediaview,m14,,5

Type: REG\_SZ  
 Data:

Value 35  
 Name: application/x-msmetafile,wmf,,5  
 Type: REG\_SZ  
 Data:

Value 36  
 Name: application/x-msmoney,mny,,5  
 Type: REG\_SZ  
 Data:

Value 37  
 Name: application/x-mspowerpoint,ppt,,5  
 Type: REG\_SZ  
 Data:

Value 38  
 Name: application/x-msproject,mpp,,5  
 Type: REG\_SZ  
 Data:

Value 39  
 Name: application/x-mspublisher,pub,,5  
 Type: REG\_SZ  
 Data:

Value 40  
 Name: application/x-mstterminal,term,,5  
 Type: REG\_SZ  
 Data:

Value 41  
 Name: application/x-msworks,wks,,5  
 Type: REG\_SZ  
 Data:

Value 42  
 Name: application/x-mswrite,wri,,5  
 Type: REG\_SZ  
 Data:

Value 43  
 Name: application/x-netcdf,cdf,,5  
 Type: REG\_SZ  
 Data:

Value 44  
 Name: application/x-netcdf,nc,,5  
 Type: REG\_SZ  
 Data:

Value 45  
 Name: application/x-perfmon,pma,,5  
 Type: REG\_SZ  
 Data:

Value 46  
 Name: application/x-perfmon,pmc,,5  
 Type: REG\_SZ  
 Data:

Value 47  
 Name: application/x-perfmon,pml,,5  
 Type: REG\_SZ  
 Data:

Value 48  
 Name: application/x-perfmon,pmr,,5  
 Type: REG\_SZ  
 Data:

Value 49  
 Name: application/x-perfmon,pmw,,5  
 Type: REG\_SZ  
 Data:

Value 50  
 Name: application/x-sh,sh,,5  
 Type: REG\_SZ  
 Data:

Value 51  
 Name: application/x-shar,shar,,5  
 Type: REG\_SZ  
 Data:

Value 52  
 Name: application/x-sv4cpio,sv4cpio,,5  
 Type: REG\_SZ  
 Data:

Value 53  
 Name: application/x-sv4crc,sv4crc,,5  
 Type: REG\_SZ  
 Data:

Value 54  
 Name: application/x-tar,tar,,5  
 Type: REG\_SZ  
 Data:

Value 55  
 Name: application/x-tcl,tcl,,5  
 Type: REG\_SZ  
 Data:

Value 56  
 Name: application/x-tex,tex,,5  
 Type: REG\_SZ  
 Data:

Value 57  
 Name: application/x-texinfo,txi,,5  
 Type: REG\_SZ

Data:  
 Value 58  
 Name: application/x-texinfo,texinfo,,5  
 Type: REG\_SZ  
 Data:

Value 59  
 Name: application/x-troff,roff,,5  
 Type: REG\_SZ  
 Data:

Value 60  
 Name: application/x-troff,t,,5  
 Type: REG\_SZ  
 Data:

Value 61  
 Name: application/x-troff,tr,,5  
 Type: REG\_SZ  
 Data:

Value 62  
 Name: application/x-troff-man,man,,5  
 Type: REG\_SZ  
 Data:

Value 63  
 Name: application/x-troff-me,me,,5  
 Type: REG\_SZ  
 Data:

Value 64  
 Name: application/x-troff-ms,ms,,5  
 Type: REG\_SZ  
 Data:

Value 65  
 Name: application/x-ustar,ustar,,5  
 Type: REG\_SZ  
 Data:

Value 66  
 Name: application/x-wais-source,src,,7  
 Type: REG\_SZ  
 Data:

Value 67  
 Name: application/zip,zip,,9  
 Type: REG\_SZ  
 Data:

Value 68  
 Name: audio/basic,au,,<  
 Type: REG\_SZ  
 Data:

Value 69

Name: audio/basic,snd,,<  
 Type: REG\_SZ  
 Data:

Value 70  
 Name: audio/x-aiff,aif,,<  
 Type: REG\_SZ  
 Data:

Value 71  
 Name: audio/x-aiff,aifc,,<  
 Type: REG\_SZ  
 Data:

Value 72  
 Name: audio/x-aiff,aiff,,<  
 Type: REG\_SZ  
 Data:

Value 73  
 Name: audio/x-pn-realaudio,ram,,<  
 Type: REG\_SZ  
 Data:

Value 74  
 Name: audio/x-wav,wav,,<  
 Type: REG\_SZ  
 Data:

Value 75  
 Name: image/bmp,bmp,,:  
 Type: REG\_SZ  
 Data:

Value 76  
 Name: image/cis-cod,cod,,5  
 Type: REG\_SZ  
 Data:

Value 77  
 Name: image/gif,gif,,g  
 Type: REG\_SZ  
 Data:

Value 78  
 Name: image/ief,ief,,:  
 Type: REG\_SZ  
 Data:

Value 79  
 Name: image/jpeg,jpe,,:  
 Type: REG\_SZ  
 Data:

Value 80  
 Name: image/jpeg,jpeg,,:  
 Type: REG\_SZ  
 Data:

Value 81  
 Name: image/jpeg,jpg,,:  
 Type: REG\_SZ  
 Data:

Value 82  
 Name: image/tiff,tif,,:  
 Type: REG\_SZ  
 Data:

Value 83  
 Name: image/tiff,tiff,,:  
 Type: REG\_SZ  
 Data:

Value 84  
 Name: image/x-cmu-raster,ras,,:  
 Type: REG\_SZ  
 Data:

Value 85  
 Name: image/x-cmx,cmx,,5  
 Type: REG\_SZ  
 Data:

Value 86  
 Name: image/x-portable-anymap,pnm,,:  
 Type: REG\_SZ  
 Data:

Value 87  
 Name: image/x-portable-bitmap,pbm,,:  
 Type: REG\_SZ  
 Data:

Value 88  
 Name: image/x-portable-graymap,pgm,,:  
 Type: REG\_SZ  
 Data:

Value 89  
 Name: image/x-portable-pixmap,ppm,,:  
 Type: REG\_SZ  
 Data:

Value 90  
 Name: image/x-rgb,rgb,,:  
 Type: REG\_SZ  
 Data:

Value 91  
 Name: image/x-xbitmap,xbm,,:  
 Type: REG\_SZ  
 Data:

Value 92  
 Name: image/x-xpixmap,xpm,,:

Type: REG\_SZ  
Data:

Value 93  
Name: image/x-xwindowdump,xwd,,:  
Type: REG\_SZ  
Data:

Value 94  
Name: text/html,htm,,h  
Type: REG\_SZ  
Data:

Value 95  
Name: text/html,html,,h  
Type: REG\_SZ  
Data:

Value 96  
Name: text/html,stm,,h  
Type: REG\_SZ  
Data:

Value 97  
Name: text/plain,bas,,0  
Type: REG\_SZ  
Data:

Value 98  
Name: text/plain,c,,0  
Type: REG\_SZ  
Data:

Value 99  
Name: text/plain,h,,0  
Type: REG\_SZ  
Data:

Value 100  
Name: text/plain,txt,,0  
Type: REG\_SZ  
Data:

Value 101  
Name: text/richtext,rtx,,0  
Type: REG\_SZ  
Data:

Value 102  
Name: text/tab-separated-values,tsv,,0  
Type: REG\_SZ  
Data:

Value 103  
Name: text/x-setext,etx,,0  
Type: REG\_SZ  
Data:

Value 104  
Name: video/mpeg,mpe,,;  
Type: REG\_SZ  
Data:

Value 105  
Name: video/mpeg,mpeg,,;  
Type: REG\_SZ  
Data:

Value 106  
Name: video/mpeg,mpg,,;  
Type: REG\_SZ  
Data:

Value 107  
Name: video/quicktime,mov,,;  
Type: REG\_SZ  
Data:

Value 108  
Name: video/quicktime,qt,,;  
Type: REG\_SZ  
Data:

Value 109  
Name: video/x-msvideo,avi,,<  
Type: REG\_SZ  
Data:

Value 110  
Name: video/x-sgi-movie,movie,,<  
Type: REG\_SZ  
Data:

Value 111  
Name: x-world/x-vrml,flr,,5  
Type: REG\_SZ  
Data:

Value 112  
Name: x-world/x-vrml,wrl,,5  
Type: REG\_SZ  
Data:

Value 113  
Name: x-world/x-vrml,wrz,,5  
Type: REG\_SZ  
Data:

Value 114  
Name: x-world/x-vrml,xaf,,5  
Type: REG\_SZ  
Data:

Value 115  
Name: x-world/x-vrml,xof,,5  
Type: REG\_SZ

Data:

Key Name: SYSTEM\CurrentControlSet\Services\InetInfo\Performance  
 Class Name: <NO CLASS>  
 Last Write Time: 5/29/98 - 2:57 AM

Value 0  
 Name: Close  
 Type: REG\_SZ  
 Data: CloseINFOPerformanceData

Value 1  
 Name: Collect  
 Type: REG\_SZ  
 Data: CollectINFOPerformanceData

Value 2  
 Name: First Counter  
 Type: REG\_DWORD  
 Data: 0x738

Value 3  
 Name: First Help  
 Type: REG\_DWORD  
 Data: 0x739

Value 4  
 Name: Last Counter  
 Type: REG\_DWORD  
 Data: 0x756

Value 5  
 Name: Last Help  
 Type: REG\_DWORD  
 Data: 0x757

Value 6  
 Name: Library  
 Type: REG\_SZ  
 Data: infoctrs.DLL

Value 7  
 Name: Open  
 Type: REG\_SZ  
 Data: OpenINFOPerformanceData

### World Wide Web Server Registry Parameters

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC  
 Class Name: <NO CLASS>  
 Last Write Time: 5/29/98 - 1:18 PM

Value 0  
 Name: DependOnGroup  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: DependOnService  
 Type: REG\_MULTI\_SZ  
 Data: RPCSS  
 NTLMSSP

Value 2  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: World Wide Web Publishing Service

Value 3  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0

Value 4  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: C:\WINNT\System32\inet\_srv\inetinfo.exe

Value 5  
 Name: ObjectName  
 Type: REG\_SZ  
 Data: LocalSystem

Value 6  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x3

Value 7  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x20

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 9/21/98 - 9:34 AM

Value 0  
 Name: 0  
 Type: REG\_SZ  
 Data: Root\LEGACY\_W3SVC\0000

Value 1  
 Name: Count  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1



Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters  
 Class Name: <NO CLASS>  
 Last Write Time: 5/29/98 - 1:38 PM  
 Value 0  
   Name: AccessDeniedMessage  
   Type: REG\_SZ  
   Data: Error: Access is Denied.  
 Value 1  
   Name: AdminEmail  
   Type: REG\_SZ  
   Data: Admin@corp.com  
 Value 2  
   Name: AdminName  
   Type: REG\_SZ  
   Data: Administrator  
 Value 3  
   Name: AnonymousUserName  
   Type: REG\_SZ  
   Data: IUSR\_CLIENT4  
 Value 4  
   Name: Authorization  
   Type: REG\_DWORD  
   Data: 0x5  
 Value 5  
   Name: CacheExtensions  
   Type: REG\_DWORD  
   Data: 0x1  
 Value 6  
   Name: CheckForWAISDB  
   Type: REG\_DWORD  
   Data: 0  
 Value 7  
   Name: ConnectionTimeOut  
   Type: REG\_DWORD  
   Data: 0x1c20  
 Value 8  
   Name: DebugFlags  
   Type: REG\_DWORD  
   Data: 0x8  
 Value 9  
   Name: Default Load File  
   Type: REG\_SZ  
   Data: Default.htm  
 Value 10  
   Name: Dir Browse Control  
   Type: REG\_DWORD  
   Data: 0x4000001e

Value 11  
   Name: Filter DLLs  
   Type: REG\_SZ  
   Data: C:\WINNT\System32\inetrv\sspifilt.dll  
 Value 12  
   Name: GlobalExpire  
   Type: REG\_DWORD  
   Data: 0xffffffff  
 Value 13  
   Name: InstallPath  
   Type: REG\_SZ  
   Data: C:\WINNT\System32\inetrv  
 Value 14  
   Name: LogFileDirectory  
   Type: REG\_EXPAND\_SZ  
   Data: %SystemRoot%\System32\LogFiles  
 Value 15  
   Name: LogFileFormat  
   Type: REG\_DWORD  
   Data: 0  
 Value 16  
   Name: LogFilePeriod  
   Type: REG\_DWORD  
   Data: 0x1  
 Value 17  
   Name: LogFileTruncateSize  
   Type: REG\_DWORD  
   Data: 0x1388000  
 Value 18  
   Name: LogSqlDataSource  
   Type: REG\_SZ  
   Data: HTTPLOG  
 Value 19  
   Name: LogSqlPassword  
   Type: REG\_SZ  
   Data: sqllog  
 Value 20  
   Name: LogSqlTableName  
   Type: REG\_SZ  
   Data: Internetlog  
 Value 21  
   Name: LogSqlUserName  
   Type: REG\_SZ  
   Data: InternetAdmin  
 Value 22  
   Name: LogType  
   Type: REG\_DWORD

```

Data:          0
Value 23
  Name:        MajorVersion
  Type:        REG_DWORD
  Data:        0x2
Value 24
  Name:        MaxConnections
  Type:        REG_DWORD
  Data:        0x2710
Value 25
  Name:        MinorVersion
  Type:        REG_DWORD
  Data:        0
Value 26
  Name:        NTAuthenticationProviders
  Type:        REG_SZ
  Data:        NTLM
Value 27
  Name:        ScriptTimeout
  Type:        REG_DWORD
  Data:        0x384
Value 28
  Name:        SecurePort
  Type:        REG_DWORD
  Data:        0x1bb
Value 29
  Name:        ServerComment
  Type:        REG_SZ
  Data:
Value 30
  Name:        ServerSideIncludesEnabled
  Type:        REG_DWORD
  Data:        0x1
Value 31
  Name:        ServerSideIncludesExtension
  Type:        REG_SZ
  Data:        .stm
Key Name:
SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Script Map
Class Name:    <NO CLASS>
Last Write Time: 5/29/98 - 2:57 AM
Value 0
  Name:        .idc
  Type:        REG_SZ
  Data:        C:\WINNT\System32\inetsrv\httpodbc.dll

```

```

Key Name:
SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Virtual Roots
Class Name:    <NO CLASS>
Last Write Time: 5/29/98 - 1:38 PM
Value 0
  Name:        /,
  Type:        REG_SZ
  Data:        C:\InetPub\wwwroot,,5
Value 1
  Name:        /iisadmin,
  Type:        REG_SZ
  Data:        C:\WINNT\System32\inetsrv\iisadmin,,1
Value 2
  Name:        /Scripts,
  Type:        REG_SZ
  Data:        C:\InetPub\scripts,,4
Key Name:
SYSTEM\CurrentControlSet\Services\W3SVC\Performance
Class Name:    <NO CLASS>
Last Write Time: 5/29/98 - 2:57 AM
Value 0
  Name:        Close
  Type:        REG_SZ
  Data:        CloseW3PerformanceData
Value 1
  Name:        Collect
  Type:        REG_SZ
  Data:        CollectW3PerformanceData
Value 2
  Name:        First Counter
  Type:        REG_DWORD
  Data:        0x758
Value 3
  Name:        First Help
  Type:        REG_DWORD
  Data:        0x759
Value 4
  Name:        Last Counter
  Type:        REG_DWORD
  Data:        0x790
Value 5
  Name:        Last Help
  Type:        REG_DWORD
  Data:        0x791
Value 6
  Name:        Library
  Type:        REG_SZ
  Data:        w3ctrs.DLL

```

Value 7  
Name: Open  
Type: REG\_SZ  
Data: OpenW3PerformanceData

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Security  
Class Name: <NO CLASS>  
Last Write Time: 5/29/98 - 2:57 AM

Value 0  
Name: Security  
Type: REG\_BINARY  
Data:  
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00  
.....  
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00 4.....  
.....  
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
.....  
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00  
.....  
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
.....  
00000050 00 00 73 00 00 00 1c 00 - fd 01 02 00 01 02 00 00  
..S.....  
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 c8 00 14 00 ....  
...#.....  
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05  
.....  
00000080 20 00 00 00 20 02 00 00 - c8 00 14 00 00 00 1c 00 ...  
.....  
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 .....  
...  
000000a0 25 02 00 00 c8 00 14 00 - 00 00 18 00 fd 01 02 00  
%.....  
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00  
.....%  
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00  
.....  
000000d0 00 00 00 05 12 00 00 00 - .....

Key Name: SOFTWARE\Unisys  
Class Name: <NO CLASS>  
Last Write Time: 5/29/98 - 1:34 PM

Key Name: SOFTWARE\Unisys\TPCC  
Class Name: <NO CLASS>  
Last Write Time: 6/1/98 - 4:18 PM

Value 0  
Name: MAXTERMS  
Type: REG\_SZ  
Data: 6000

## Tuxedo Configuration

Note: this configuration file is repeated on each of the other 2 clients with the exception of the Hostname, "CLIENT1", which is replaced by "CLIENT2" thru "CLIENT3".

```
*RESOURCES
IPCKEY          133133

MAXACCESSERS   400
MAXSERVERS     210
MAXSERVICES    1100
MODEL          SHM
MASTER        tpcctm
LDBAL         N
SCANUNIT      60
BLOCKTIME     60
BBLQUERY      60

*MACHINES
DEFAULT:

CLIENT1        LMID=tpcctm
                TUXDIR="c:\tuxedo"
                APPDIR="c:\tuxedo\runtime"
                TUXCONFIG="c:\tuxedo\runtime\tuxconfig"
                ULOGPFX="c:\tuxedo\runtime\ulog\ULOG"
                TYPE="WinNT"
                UID=0
                GID=0

*GROUPS
GRALL          LMID=tpcctm      GRPNO=1      OPENINFO=NONE

GRDEL          LMID=tpcctm      GRPNO=3      OPENINFO=NONE

*SERVERS
DEFAULT:

                CLOPT="-A -- -sAVALON4 -dtpcc"

tpccsvr       SRVGRP=GRALL
                SRVID=100
                MIN=76 MAX=200
                RQADDR=allq REPLYQ=Y

tpccdclv     SRVGRP=GRDEL
                SRVID=300
                MIN=8 MAX=10
                CLOPT="-A -- -sAVALON4 -dtpcc"
                RQADDR=delq REPLYQ=Y

*SERVICES
```



## Appendix D - RTE Code

### Admin Environment

```
if '%1'==' ' goto usage
if '%2'==' ' goto usage
if '%3'==' ' goto usage

:paramok

net time \\%1 /SET /Y

if %ERRORLEVEL% NEQ 0 pause

set WEBADMINCFG=web%2.cfg
set WEBMAXDRIVERS=%3
set WEBDIAGLEVEL=4
set WEBEVENTLOG=0
set WEBEVENTHOST=
set WEBCHECKLEVEL=2

webadmin.exe

goto end

:usage
@ECHO You must supply the following parameters:
@ECHO "webnnn.cmd <clock sync host name> <cfg file suffix> <driver count>"
pause

:end
```

### Profiles used for Performance Run

#### Web1470.cfg

```
//
// Common Driver Configuration
//
INITBASEPORT 4300
INITSYNCMAX 4
INITPAUSE 1
INITRSCALE 400
INITTSCALE 100
INITRWID 1, 1470
INITFIXEDWID 1
```

```
INITCCLAST 208
INITCCID 208
INITCITEMID 208
//
// Configuration Driver 1
//
1 INITIPADDR 192.59.13.228
1 INITIISADDR 192.168.13.1
1 INITIISPORT 80
1 INITBROWSERS 980
1 INITMYWID 1,98
//
// Configuration Driver 2
//
2 INITIPADDR 192.59.13.229
2 INITIISADDR 192.168.23.2
2 INITIISPORT 80
2 INITBROWSERS 980
2 INITMYWID 99,196
//
// Configuration Driver 3
//
3 INITIPADDR 192.59.13.230
3 INITIISADDR 192.168.33.3
3 INITIISPORT 80
3 INITBROWSERS 980
3 INITMYWID 197,294
//
// Configuration Driver 4
//
4 INITIPADDR 192.59.13.230
4 INITIISADDR 192.168.34.3
4 INITIISPORT 80
4 INITBROWSERS 980
4 INITMYWID 295,392
//
// Configuration Driver 5
//
5 INITIPADDR 192.59.13.229
5 INITIISADDR 192.168.24.2
5 INITIISPORT 80
5 INITBROWSERS 980
5 INITMYWID 393,490
//
// Configuration Driver 6
//
6 INITIPADDR 192.59.13.228
6 INITIISADDR 192.168.14.1
6 INITIISPORT 80
```

```

6 INITBROWSERS 980
6 INITMYWID 491,588
//
// Configuration Driver 7
//
7 INITIPADDR 192.59.13.228
7 INITIISADDR 192.168.15.1
7 INITIISPORT 80
7 INITBROWSERS 980
7 INITMYWID 589,686
//
// Configuration Driver 8
//
8 INITIPADDR 192.59.13.229
8 INITIISADDR 192.168.25.2
8 INITIISPORT 80
8 INITBROWSERS 980
8 INITMYWID 687,784
//
// Configuration Driver 9
//
9 INITIPADDR 192.59.13.230
9 INITIISADDR 192.168.35.3
9 INITIISPORT 80
9 INITBROWSERS 980
9 INITMYWID 785,882
//
// Configuration Driver 10
//
10 INITIPADDR 192.59.13.231
10 INITIISADDR 192.168.32.3
10 INITIISPORT 80
10 INITBROWSERS 980
10 INITMYWID 883,980
//
// Configuration Driver 11
//
11 INITIPADDR 192.59.13.231
11 INITIISADDR 192.168.22.2
11 INITIISPORT 80
11 INITBROWSERS 980
11 INITMYWID 981,1078
//
// Configuration Driver 12
//
12 INITIPADDR 192.59.13.231
12 INITIISADDR 192.168.12.1
12 INITIISPORT 80
12 INITBROWSERS 980
12 INITMYWID 1079,1176
//
// Configuration Driver 13
//
13 INITIPADDR 192.59.13.223
13 INITIISADDR 192.168.16.1
13 INITIISPORT 80
13 INITBROWSERS 980
13 INITMYWID 1177,1274

```

```

//
// Configuration Driver 14
//
14 INITIPADDR 192.59.13.223
14 INITIISADDR 192.168.26.2
14 INITIISPORT 80
14 INITBROWSERS 980
14 INITMYWID 1275,1372
//
// Configuration Driver 15
//
15 INITIPADDR 192.59.13.223
15 INITIISADDR 192.168.36.3
15 INITIISPORT 80
15 INITBROWSERS 980
15 INITMYWID 1373,1470
//

```

## Driver Environment

Note: this configuration file is repeated on each of the other 15 drivers with the exception of WEBDRIVERNO, which is replaced by 2 thru 15.

```

set WEBDRIVERNO=1
set WEBADMBASEPORT=4300
set WEBDIAGLEVEL=2
set WEBEVENTLOG=1
set WEBEVENTHOST=
set WEBLOGLEVEL=1
set WEBSINGLETRAN=0
set WEBTPCCAUDIT=0
set WEBRTFUDGETM=110
set WEBNEWORDERPROB=4484
set WEBPAYMENTPROB=4307
set WEBORDERSTATUSPROB=403
set WEBDELIVERYPROB=403
set WEBSTOCKLEVELPROB=403
set WEBTTNEWORDER=12030
set WEBTTPAYMENT=12030
set WEBTTDELIVERY=5060
set WEBTTORDERSTATUS=10070
set WEBTTSTOCKLEVEL=5060

```

```

webdriver.exe
exit

```

# Appendix E - Disk Storage


## TPC-C 180-Day Disk Space Requirements

| Warehouses                |                   | 1530   | tpmC              | 18,343.17         |                  |  |  |
|---------------------------|-------------------|--|-------------------|-------------------|------------------|--|--|
| Table                     | Initial Rows      | Data KB  | Index KB          | Extra 5% KB       | Total With 5% KB |  |  |
| Warehouse                 | 1,530             | 168  | 40                | 10                | 218              |  |  |
| District                  | 15,300            | 1,704  | 64                | 88                | 1,856            |  |  |
| Customer                  | 45,900,000        | 33,381,824   | 2,143,752         | 1,776,279         | 37,301,855       |  |  |
| History (D)               | 45,900,000        | 2,550,064  | 0                 |                   | 2,550,064        |  |  |
| Order (D)                 | 45,900,000        | 1,406,904  | 777,136           |                   | 2,184,040        |  |  |
| New-Order                 | 13,770,000        | 217,712  | 640               | 10,918            | 229,270          |  |  |
| Order-Line (D)            | 459,001,971       | 28,687,624   | 71,496            |                   | 28,759,120       |  |  |
| Item                      | 100,000           | 9,528  | 88                | 481               | 10,097           |  |  |
| Stock                     | 153,000,000       | 48,960,000   | 109,712           | 2,453,486         | 51,523,198       |  |  |
| <b>Totals KB</b>          |                   | 115,215,528  | 3,102,928         | 4,241,262         | 122,559,718      |  |  |
| Db/Filegroup              | Count             | Size MB  | MB Allocated      | MB Loaded +5%     | MB for 8 Hours   |  |  |
| master, model & msdb      | 30                | 30   | 30                | 30                | 30               |  |  |
| tempdb                    | 200               | 200  | 200               | 200               | 200              |  |  |
| mssql70_ipcc_root         | 1                 | 10   | 10                | 10                | 10               |  |  |
| mssql70_cs_fg             | 7                 | 14,300   | 100,100           | 86,743            | 86,743           |  |  |
| mssql70_misc_fg           | 7                 | 6,200  | 43,400            | 32,944            | 41,728           |  |  |
| <b>Total Allocated MB</b> |                   |  | <b>143,740</b>    | <b>119,927</b>    | <b>128,711</b>   |  |  |
| <b>MB</b>                 |                   |  |                   |                   |                  |  |  |
| Dynamic Space MB          | 31,879            | Sum of data for orders, order_line & history           |                   |                   |                  |  |  |
| Static Space              | 87,808            | Sum of data+index+5% - Dynamic Space                   |                   |                   |                  |  |  |
| Free Space                | 24,053            | Total allocated space - (Dynamic & Static Spaces)      |                   |                   |                  |  |  |
| Daily Growth              | 6,115             | (Dynamic Space / (W * 62.5)) * tpmC                    |                   |                   |                  |  |  |
| Daily Spread              | 14,880            | Free space - 1.5 * Daily growth (zero if negative)     |                   |                   |                  |  |  |
|                           | 0                 | SQL Server can be configured to eliminate Daily Spread |                   |                   |                  |  |  |
| 180 Day Space MB          | 1,188,553         | Static Space + 180 * (Daily Growth + Daily Spread)     |                   |                   |                  |  |  |
| 180 Day Space GB          | <b>1,160.70</b>   |  |                   |                   |                  |  |  |
| 8 hr log GB               | <b>45.38</b>      | (need double for mirroring)                            |                   |                   |                  |  |  |
| Disk Capacity MB          | 4339              | <b>4.2373 GB</b> Capacity of 4GB disks                 |                   |                   |                  |  |  |
|                           | 8683              | <b>8.4795 GB</b> Capacity of 9GB disks                 |                   |                   |                  |  |  |
| Space Usage               | GB Needed         | Disks Priced   | GB Priced         |                   |                  |  |  |
| 180-day space DB          | 1160.70 GB        | 119  | 504.24 GB         | 4GB drives        |                  |  |  |
| Total DB                  |                   | <b>77</b>  | <b>652.92 GB</b>  | <b>9GB drives</b> |                  |  |  |
|                           |                   | <b>196</b>   | <b>1157.16 GB</b> |                   |                  |  |  |
| 8-hr log+mirror           | 90.76 GB          | 12   | 101.75 GB         | 9GB drives        |                  |  |  |
| OS, SQL Server            | 1.85 GB           | 1  | 4.24 GB           | 4GB drives        |                  |  |  |
| <b>Total space</b>        | <b>1253.30 GB</b> | <b>209</b>   | <b>1263.15 GB</b> |                   |                  |  |  |

| TPC-C 180-Day Dynamic Table Growth Rates |                   |                   |                  |                |                |                  | 18,343.17 tpmC |
|--|-------------------|-------------------|------------------|----------------|----------------|------------------|----------------|
| Tables                                   | Initial (KB)      | Final (KB)        | Change(KB)       | Unused (KB)    | KB / New-Order | 8-Hr MB          |                |
| History                                  | 2,550,064         | 2,846,552         | 296,488          | 71,192         | 0.0704         | 3,096.01         |                |
| Orders                                   | 2,184,040         | 3,285,040         | 1,101,000        | 42,800         | 0.2616         | 4,382.14         |                |
| Order_line                               | 28,759,120        | 31,661,152        | 2,902,032        | 12,048         | 0.6895         | 34,013.79        |                |
| <b>Dynamic</b>                           | <b>33,493,224</b> | <b>37,792,744</b> | <b>4,299,520</b> | <b>126,040</b> | <b>1.0216</b>  | <b>41,491.94</b> |                |
| New_order<br>Static                      | 218,352           | 344,536           | 126,184          | 10,648         | 0.0300         | 471.02           |                |
| Log                                      | 371,405           | 22,940,442        | 22,569,037       |                | <b>5.3624</b>  | 46,470.14        | 45.381         |
| SUM(d_next_o_id)                         | 45,915,300        | 50,124,094        | 4,208,794        |                |                |                  |                |



# Appendix F - Third-Party Price Quotations

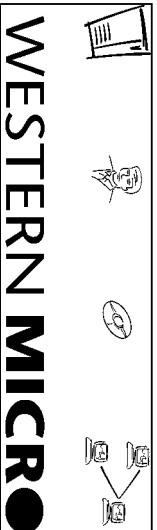

Western Micro Technology  
(800)937-8446

1/13/98

Quoted to: Jerry Bugger/Unisys for TPC.org  
Prepared by: Tony Jacobs

| Qty.   | Description                                   | Style           | Price             | Extended Price    |
|--|---|-----------------|-------------------|-------------------|
| <b>Server Hardware</b>                       |   |                 |                   |                   |
| 1  | SYS: Aquanta QR/2, w/CDRom, 0 Proc, 0MB Mem   | QR2000101-BAS   | \$10,820          | \$10,820          |
| 4  | PROC: 1x400MHz Pentium II /1MB Cache          | XER2400-1MB     | \$3,955           | \$15,820          |
| 6  | ACC: Voltage Regulator Module, Processor      | XEO24001-VRM    | \$46              | \$276             |
| 32   | MEM: 128 MB Memory Upgrade                    | DIM5072-128     | \$786             | \$25,152          |
| 1  | DISK: 4GB Drive, Ultra SCSI SCA               | HDS417-CX1      | \$746             | \$746             |
| 1  | ETHERNET: 100Mbit/sec, PCI 32-bit             | ETH10100051-PCI | \$117             | \$117             |
| 1  | CDROM: 14-32x Speed, SCSI                     | CDR1432-SI      | \$161             | \$161             |
| 1  | MONITOR: 15-inch Color                        | EVG2100-E       | \$272             | \$272             |
| 1  | KEYBD: 104 Key Spacesaver                     | PCK104-SKB      | \$31              | \$31              |
| 1  | MOUSE: 2 Button PS2                           | PWM1-PS2        | \$23              | \$23              |
| 8  | CTRL:RAID Tri-SCSI-2 Ultra PCI, 0MB Mem.      | RAD9602-PCI     | \$1,692           | \$13,536          |
| 8  | MEM: 16 MB ECC EDO Memory Upgrade             | RAD9616-MEM     | \$225             | \$1,800           |
| 16   | CBL: SCSI 68-pin HD->VHD Conns                | CBL2210-OSM     | \$90              | \$1,440           |
| 131  | DISK: 4GB Drive, 10K, SCA + 10% spares        | OSD4203-W45     | \$625             | \$81,875          |
| 98   | DISK: 9GB Drive, 10K, SCA + 10% spares        | OSD9203-W45     | \$930             | \$91,140          |
| 14   | CAB: 7 SCA Disk Cage w/ 050 I/F & Cat Chl, 3U | OSM310050-U05   | \$1,345           | \$18,830          |
| 14   | CAB: 7 SCA Disk Cage w/ 057 I/F, 3U           | OSM310057-U05   | \$1,350           | \$18,900          |
| 2  | CAB: 7 SCA Disk Cage w/ 100 I/F, 0MB, 3U      | OSM310100-U05   | \$2,727           | \$5,454           |
| 2  | MEM: 32MB OSM Cache                           | OSM1000-C32     | \$150             | \$300             |
| 30   | CAB: Rackmount Kit for Disk Cages             | OSM3000-RMK     | \$84              | \$2,520           |
| 2  | PWR: OSM 2nd Power Supply                     | OSM3000-APM     | \$261             | \$522             |
| 1  | PWR: 3000 VA UPS, 3U                          | UPD30001-SXR    | \$2,239           | \$2,239           |
| 3  | CAB: Rack Cabinet, w/ fill pnls, 36U          | CAB361-SXR      | \$1,384           | \$4,152           |
| 2  | CAB: Link kit for 36U cabinets                | LNK361-SXR      | \$231             | \$462             |
| 3  | CAB: Bezel kit 36U                            | BEZ3611-CAB     | \$206             | \$618             |
| 3  | CAB: Stabilizer kit 0U                        | WGT39581-SXR    | \$110             | \$330             |
| 1  | PNL: L&R side panels 36U                      | PAN3621-SXR     | \$192             | \$192             |
| <b>Server Total</b>                          |   |                 | <b>\$192</b>      | <b>\$297,728</b>  |
| <b>Client Hardware</b>                       |   |                 |                   |                   |
| 3  | SYS: Aquanta GPS, 0 Proc, 0MB Mem             | GPS60071-BAS    | \$945             | \$2,835           |
| 6  | PROC:1x300MHz Pentium II/512KB Cache          | GPS2300-512     | \$863             | \$5,178           |
| 3  | UPGRD: GPS P-II 2nd CPU Supl.                 | GPS60071-P2U    | \$32              | \$96              |
| 6  | MEM: 128 MB Memory Upgrade                    | DIM672-128      | \$741             | \$4,446           |
| 3  | DISK: 2GB Ultra SCSI 3.5 Internal             | HDS2000-SW7     | \$573             | \$1,719           |
| 3  | CDROM: 14-32x Speed, SCSI                     | CDR1432-SI      | \$161             | \$483             |
| 6  | ETHERNET: 100Mbit/sec, PCI 32-bit             | ETH1010007-PCI  | \$101             | \$606             |
| 3  | ETHERNET: 100Mbit/sec, PCI 32-bit, Quad       | SF1001-ET4      | \$1,212           | \$3,636           |
| 3  | MONITOR: 15-inch Color                        | EVG2100-E       | \$272             | \$816             |
| 3  | KEYBD: 104 Key Spacesaver                     | PCK104-SKB      | \$31              | \$93              |
| 3  | MOUSE: 2 Button PS2                           | PWM1-PS2        | \$23              | \$69              |
| <b>Client Total</b>                          |   |                 | <b>\$19,977</b>   | <b>\$19,977</b>   |
| <b>Server and Client Total</b>               |   |                 | <b>\$317,705</b>  | <b>\$317,705</b>  |
| <b>Discount based on total dollar volume</b> |   |                 | <b>(\$31,771)</b> | <b>(\$31,771)</b> |
| <b>Quote Total</b>                           |   |                 | <b>\$285,935</b>  | <b>\$285,935</b>  |

Quote valid for 75 days.

Disks come with return to factory, 5 year warranty, 7 day replenishment

OCT 30 1998 21:17 FR MICROSOFT\_RECV #1 425 936 7329 TO 919493805539 P.03/03

Microsoft Corporation  
One Microsoft Way  
Redmond, WA 98052-6399

tel 425 936 0200  
fax 425 936 7329  
<http://www.microsoft.com/>

**Microsoft**

October 30, 1998

Mr. Jerrold Buggett  
Director, Systems Analysis, Modeling, Measurement  
Unsys Corporation  
25725 Jeronimo Road  
Mission Viejo, CA 92691  
  
via FAX # 949-380-5539

Dear Jerry,

Here is the information you requested regarding pricing of certain Microsoft products:

|  |         |
|--|---------|
| Microsoft SQL Server, Enterprise Edition 7.0, unlimited user licence | \$28999 |
| Microsoft Windows NT Server, Enterprise Edition 4.0, incl 25 CALs    | \$3999  |
| Windows NT Server 4.0 software, incl 5 CALs                          | \$809   |
| Visual C++ Professional 5.0  | \$499   |
| 5-yr maintenance for above software @ \$2095/yr                      | \$10475 |

This quote is valid for the next 60 days. Please let me know if I can be of any further assistance.

Best regards,



Sid Arora  
Product Manager, Microsoft SQL Server  
Applications Marketing

Microsoft Corporation is an equal opportunity employer.

\*\* TOTAL PAGE.03 \*\*

SEP 22 1998 19:16 FR MICROSOFT\_RECV #1

425 936 7329 TO 919493805539

P.02/03

MICROSOFT CORPORATION  
One Microsoft Way  
Redmond, WA 98052-6399

1st Floor  
Fax 425 936 7329  
<http://www.microsoft.com/>

**Microsoft**

September 22, 1998

Mr. Jerrold Bugert  
Director, Systems Analysis, Modeling, Measurement  
Unisys Corporation  
25725 Jeronimo Road  
Mission Viejo, CA 92691  
  
via FAX # 949-380-5539


Dear Jerry,

Microsoft has received your request for permission to disclose the results of TPC-C benchmark tests conducted by Unisys with Microsoft SQL Server, Enterprise Edition 7.0 on the following system:

Unisys Aquanta QR/2 Server, 4-processors, Pentium II Xeon, 400 MHz, 1MB L2 cache  
Test Results: 18300 tpmC @ \$24/tpmC approximately

Microsoft hereby grants Unisys permission to disclose these results to third parties and acknowledges that Unisys has formally requested permission to do so in accordance with the license agreement for Microsoft SQL Server 7.0 software.

Best regards,

  
Sid Arora  
Product Manager, Microsoft SQL Server  
Applications Marketing

Microsoft Corporation is an equal opportunity employer.



ENTERPRISE MIDDLEWARE SOLUTIONS

October 6, 1998

Mr. Jerrold Buggert  
Director, Systems Analysis, Modeling, Measurement  
Unisys Corporation  
25725 Jeronimo Road  
Mission Viejo, CA 92691  
Fax (714) 380-5468

Dear Mr. Buggert:

Per your request I am enclosing the pricing information regarding TUXEDO 6.x that you requested. This pricing applies to Tuxedo 6.1, 6.2, 6.3 and 6.4. Please note that Tuxedo 6.4 is our most recent version of Tuxedo but that all 6.x releases are generally available. Core functionality services pricing is appropriate for your activities. As per the table below, server systems are classified in one of 5 tiers based on CPU type and capacity. The Acquanta GPS systems with 2 CPU capacity are classified as tier 1 systems, those with 4 CPU capacity are tier 2.

**Tuxedo Core Functionality Services (CFS) Program Product Pricing and Description**

TUX-CFS provides a basic level of middleware support for distributed computing, and is best used by organizations with substantial resources and knowledge for advanced distributed computing implementations.

TUX-CFS prices are server only and are based on the overall performance characteristics of the server and uses the same five tier computer classification as TUXEDO 6.x. Prices range from \$3,000 for Tier 1 to \$250,000 for Tier 5. Under this pricing option EVERY system running TUX-CFS at the user site must have a TUXEDO license installed and pay the appropriate per server license fees.

**BEA Tux/CFS Unlimited User License Fees Per Server**

| Unlimited User License fees per server   | Number of Users | Dollar Amount | Maintenance (5 x 8) per year | Maintenance (7 x 24) per year |
|--|-----------------|---------------|------------------------------|-------------------------------|
| Tier 1 -- PC Servers with 1 or 2 CPUs, entry level RISC Uni-processor workstations and servers (Class 1 and Class 2) | Unlimited       | \$3,000.00    | \$450.00                     | \$660.00                      |
| Tier 2 -- PC Servers with 3 or 4 CPUs, Midrange RISC Uni-processor servers and workstations (class 3)                | Unlimited       | \$12,000.00   | \$1,800.00                   | \$2,640.00                    |
| Tier 3 -- Midrange Multiprocessors, up to 8 CPUs per system capacity (Class 4 and 5)                                 | Unlimited       | \$30,000.00   | \$4,500.00                   | \$6,600.00                    |

10/06/98

BEA SYSTEMS, INC.

|  |           |              |             |             |
|--|-----------|--------------|-------------|-------------|
| Tier 4 -- Large (more than 8, less than 32 CPUs) and Mainframe Systems (Class 6) | Unlimited | \$100,000.00 | \$15,000.00 | \$22,000.00 |
| Tier 5 -- Massively Parallel Systems, > 32 processors                            | Unlimited | \$250,000.00 | \$37,500.00 | \$55,000.00 |

Intel based server tier classifications:

| Platform                          | Operating System  | Tier 1                      | Tier 1   | Tier 2   | Tier 3 | Tier 3   |
|-----------------------------------|---|-----------------------------|--|--|--------|--|
| Intel Pentium/<br>Pentium Pro PCs | Interactive R3.2 ESIX SVR 4.0 SCO UNIX 3.2.2 and 3.2.4 SCO ODT 2.x,3.x Solaris x86 2.X UnixWare, Windows NT 3.5/4.0 | All 386/486 PCs are Class 1 | ALL Pentium and Pentium Pro PCs with 1 or 2 CPUs capacity are Tier 1 | ALL Pentium and Pentium Pro PCs with 3 or 4 CPUs capacity are Tier 2 |        | ALL Pentium and Pentium Pro PCs with 5,6,7, or 8 CPUs are Tier 3 |

Very Truly Yours,



Lewis D. Brentano,  
Director, Market Planning

SEPTEMBER 22, 1998

RICK FREEMAN  
UNISYS CORPORATION  
25725 JERONIMO ROAD  
MISSION VIEJO, CALIFORNIA, 92691  
FAX: 949-380-5539

RICK  
HERE IS THE MODIFIED QUOTE AS REQUESTED BY GLEN WEEKS.

| ITEM    | QTY.  | DESCRIPTION   | UNIT     | EXTENDED     |
|---------|-------|---|----------|--------------|
| DEH2924 | 2000+ | COMPEX TP1008C 8 PORT 10BASE-T<br>HUB WITH BNC UPLINK. LIFETIME<br>WARRANTY.  | \$ 33.00 | \$ 66,000.00 |
| DEH2648 | 2000+ | LANTECH LTC WORKGROUP 8 PORT<br>10BASE-T HUB WITH SWITCH<br>SELECTABLE 8 <sup>th</sup> PORT AS UPLINK<br>OR DEDICATED 8 <sup>th</sup> PORT. 5 YEAR<br>WARRANTY. | \$ 34.50 | \$ 69,000.00 |

THIS QUOTE IS VALID FOR 90 DAYS.  
THANK YOU FOR YOUR CONSIDERATION

BOB CHENEY  
ACCOUNT MANAGER  
DATACOMM WAREHOUSE  
800-328-2261 EXT. 22878  
732-363-4823 OR 732-905-5731 FAX  
CHENEYR@MWHSE.COM



**NETLUX**

14180 Live Oak Ave., Unit E  
Baldwin Park, Ca. 91760

**1-800-789-1780**  
Phone#626-851-9737  
Fax #626-851-9837

November 5, 1998

Rick Freeman  
Unisys Corporation  
25725 Jeronimo Road  
Mission Viejo, CA 92691  
Fax: (949) 380-5539  
cc: (949) 380-5344

---

### Quotation

| Quantity | Part No. | Description                      | Unit Price | Total     |
|----------|----------|----------------------------------|------------|-----------|
| 3        | NX-H8TXD | 8-port 100Mbps FAST Ethernet Hub | \$215.00   | \$ 645.00 |

Terms and Conditions:  
FOB Origin  
Quote Valid for 60 days  
5 Year Warranty

Sincerely,  
Martin Parry  
NETLUX