



# TPC Benchmark™ C Full Disclosure Report

**Unisys Corporation  
Enterprise Systems**

**Aquanta QS/2V Server**

**using**

**Microsoft NT Server Enterprise Edition 4.0**

**and**

**Microsoft SQL Server Enterprise Edition 7.0**

**First Edition  
December 2<sup>nd</sup> 1998**

Unisys Part Number 4494 8909-000

**First Edition – December 1998**

Unisys Corporation believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. Unisys Corporation assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, Unisys Corporation and Microsoft Corporation provide no warranty on the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment, and therefore results obtained in other operating environments may vary significantly. Unisys Corporation and Microsoft Corporation do not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/pmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright © 1998 Unisys Corporation.

All Rights Reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text on the title page of each item reproduced.

Printed in USA, December 1998.

Unisys Corporation Part Number: 4494 8909-000

Unisys and Aquanta are registered trademarks of Unisys Corporation.

Intel, Pentium and Pentium II and Xeon are registered trademarks of Intel Corporation.

Microsoft Windows NT and SQL Server are registered trademarks of Microsoft Corporation.

BEA and Tuxedo are registered trademarks of BEA Systems, Inc.

TPC Benchmark, TPC-C and tpmC are trademarks of the Transaction Processing Performance Council.

Other product names used in this document may be trademarks and/or registered trademarks of their respective companies.

## Page Status

<b>Page</b>	<b>Issue</b>
i through xii	-000
0-1 through 0-3	-000
0-4	Blank
1-1 through 1-1	-000
1-2	Blank
2-1 through 2-2	-000
3-1 through 3-3	-000
3-4	Blank
4-1 through 4-7	-000
4-8	Blank
5-1 through 5-8	-000
6-1 through 6-2	-000
7-1 through 7-2	-000
8-1 through 8-1	-000
8-2	Blank
9-1 through 9-3	-000
9-4	Blank
A-1 through A-53	-000
A-54	Blank
B-1 through B-43	-000
B-44	Blank
C-1 through C-152	-000
D-1 through D-2	-000
E-1 through E-2	-000
F-1 through F-8	-000

Unisys uses an 11-digit document numbering system. The suffix of the document number (1234 5678-xyz) indicates the document level. The first digit of the suffix (x) designates a revision level; the second digit (y) designates an update level. For example, the first release of a document has a suffix of -100. A suffix of -130 designates the third update to revision 1. The third digit (z) is used to indicate an errata for a particular level and is not reflected in the page status summary.

# Abstract

## **Overview**

This report documents the methodology and results of the TPC Benchmark C (TPC-C) conducted on the Unisys Corporation Aquanta QS2/V server. The operating system on the server was Microsoft Windows NT Server Enterprise Edition 4.0. The DBMS used was Microsoft SQL Server Enterprise Edition 7.0. The operating system on the clients was Microsoft Windows NT Server 4.0. The clients ran Microsoft's Internet Information Server 3.0 and Tuxedo 6.3 CFS for NT.

## **TPC Benchmark Metrics**

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (five year capital cost per measured tpmC), and the availability date are reported as required by the benchmark specification.

## **Executive Summary**

The following pages contain the executive summary results of the benchmark.

## **Auditor**

The benchmark configuration, environment, and methodology used to produce and validate the test results, along with the pricing model used to calculate the cost per tpmC, were audited by Richard Gimarc of Performance Metrics, Inc. to verify compliance with the relevant TPC specification.

**UNISYS**

**Aquanta QS/2V Server  
C/S**

TPC-C Rev. 3.4

Report Date:

02-Dec-1998

Total System Cost

**\$422,675**

**19,118.37 tpmC**

**\$22.11 per tpmC**

**29-Dec-1998**

Processors  
4 Pentium® II Xeon  
400 MHz  
1MB L2 cache

Database Manager  
Microsoft SQL  
Server Enterprise  
Edition 7.0


Operating System  
Microsoft NT  
Server 4.0  
Enterprise Edition

Other Software  
Microsoft IIS 3.0  
Tuxedo 6.3 CFS

Number of Users  
**15,300**

3 x Aquanta GPS Clients

Aquanta QS/2V Server

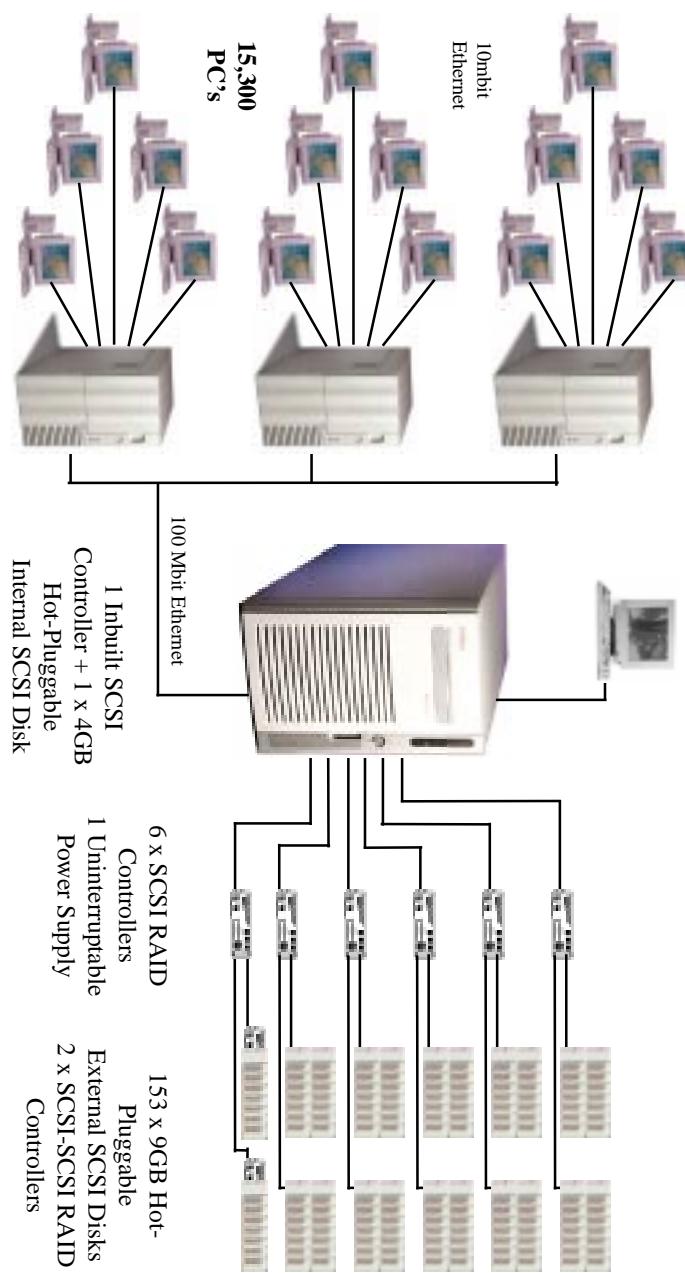

System Components	Server		Clients	
	Quantity	Type	Quantity	Type
Processors	4	400 MHz Pentium® II Xeon with 1MB Level 2 Cache	3	2 x 300MHz Pentium® II with 512KB Level 2 Cache
Memory	1	4096MB	3	256MB
Disk Controllers	6 + 2	SCSI RAID Inbuilt SCSI	3	Inbuilt SCSI
Disk Drives	153	8.48 GB	3	2.02 GB
Total Storage	1	4.24 GB		6.06 GB
CD-ROM / Tape	1	CD-ROM Drive	3	CD-ROM Drive

Unisys Corporation		Aquanta QS12V Server C/S				TPC-C Rev 3.4 02-Dec-1998
Description	Style	Third Party Brand Pricing	Unit Price	Qty.	Extended Price	5 Years Maint.
<b>Server Hardware</b>						
SYS: Aquanta QGS/2V, w/ CDRom, 0 Proc, 0MB Mem	QVS200071-BCS	1	\$5,100	1	\$5,100	\$1,752
PROC: 1x400MHz Pentium II /1MB Cache	XEV2400-1MB	1	\$3,627	4	\$14,508	\$4,992
ACC: Voltage Regulator Module, Processor	XEO24001-VRM	1	\$46	6	\$276	
MEM: 256 MB Memory Upgrade	DIM5072-2-256	1	\$963	16	\$15,408	\$5,568
DISK: 4GB Drive, Ultra SCSI SCA	HDS417-CX1	1	\$746	1	\$746	\$264
ETHERNET: 100Mbps PCI 32-bit	ETH1010051-PCI	1	\$117	1	\$117	\$48
CDROM: 14-32x Speed, SCSI	CDR1432-SI	1	\$161	1	\$161	
MONITOR: 15-inch Color	EVG2100-P	1	\$320	1	\$320	
KEYBD: 104 Key Spacesaver	PCK104-SKB	1	\$31	1	\$31	
MOUSE: 2 Button PS2	PWM1-PS2	1	\$23	1	\$23	
CTRL: RAID 3-Ch PCI w/ 32MB Mem&Bat,BU+10% spares	DAC1164P/VX	My/ex	2	8	\$22,704	\$400
<b>Storage Hardware</b>						
CBL: SCSI 68-pin HD->VHD Conn's	CBL2210-OSM	1	\$90	12	\$1,080	
DISK: 9GB Drive, 10K SCA + 10% spares	OSD9203-W45	1	\$330	169	\$157,170	spared
CAB: Disk 7 SCA w/ 050 IF & Cat-cbl, 0 Disks, 3U	OSM310050-U05	1	\$1,345	10	\$13,450	\$7,680
CAB: Disk 7 SCA w/ 057 IF, 0 Disks, 3U	OSM310057-U05	1	\$1,350	10	\$13,500	\$7,680
CAB: Disk, 7 SCA, w/ 100 IF, 0MB, 0 Disks, 3U	OSM310100-U05	1	\$2,727	2	\$5,454	\$3,456
MEM: 32MB OSM cache	OSM1000-C32	1	\$150	2	\$300	\$216
CAB: Rackmount Kit for Disk Cages	OSM3000-RMK	1	\$84	22	\$1,848	
PWR: 2nd Power Supply Upgrade, OSM Cabinet	OSM3000-APM	1	\$261	2	\$522	\$264
PWR: 3000 VA UPS, 3U	UPD30001-SXR	1	\$2,339	1	\$2,339	\$936
CAB: Rack Cabinet, w/ fill plts, 36U	CAB361-SXR	1	\$1,384	2	\$2,768	
CAB: Bezel kit 36U	BEZ3611-CAB	1	\$206	2	\$412	
PNL: L&R side panels 36U	WGT39581-SXR	1	\$110	2	\$220	
PAN3621-SXR		1	\$192	2	\$384	
<b>Server Software</b>						
Microsoft NT Server Enterprise Edition 4.0, incl 25 CALs						
Microsoft SQL Server Enterprise Edition 7.0, unlimited user license						
<b>Client Hardware</b>						
SYS: Aquanta GRS, 0 Proc, 0MB Mem	GPS600071-BAS	Microsoft	3	\$3,999	1	\$3,999
PROC: iX300MHz Pentium II/512KB Cache	GPS2300-512	Microsoft	3	\$3,999	1	\$3,999
UPGRD: GPS P-II 2nd CPU Supt.	GPS600071-P2U					
MEM: 128 MB Memory Upgrade	DM672-128					
DISK: 2GB Ultra SCSI 3.5 Internal	HDS2000-SW7					
CDROM: 14-32x Speed, SCSI	CDR1432-SI					
ETHERNET: 100Mbps/SEC, PCI 32-bit	ETH101007-PCI					
ETHERNET: 100Mbps/SEC, PCI 32-bit, Quad	SF1001-ET4					
MONITOR: 15-inch Color	EVG2100-P					
KEYBD: 104 Key Spacesaver	PCK104-SKB					
MOUSE: 2 Button PS2	PWM1-PS2					
<b>Client Software</b>						
Microsoft Windows NT Server 4.0, incl 5 CALs						
Microsoft, Visual C++ Professional 5.0						
TUXEDO Core Functional Services 6.3 for NT						
<b>User Connectivity</b>						
Ethernet Hub, 8-Port 100TX TrueFast + 10% spares	NX-H8TX	Microsoft	3	\$609	3	\$2,427
Ethernet Hub, 8-Port 10Base-T + 1-Port BNC + 10% spares	DEH2924	Microsoft	3	\$499	1	\$499
Unisys Service Pre-Pay Discount		BEA	4	\$3,000	3	\$9,000
Western Micro discount						
<b>Notes:</b>						
1. HW Maintenance - First 36 months that are included in Unisys warranty are upgraded to service level: Standard Performance-Gold. Last 24 months are also at service level: Standard Performance-Gold.						
2. All Microsoft maintenance is covered by the maintenance cost of Microsoft of SQL Server.						
3. 10% or minimum 2 spares are added in place of onsite service if products have a five year return-to-vendor warranty)						
4. Pricing: 1 = Western Micro, 2 = Mylex, 3 = Microsoft, 4 = BEA, 5 = Netluc, 6 = DataComm (Whse						
<b>The benchmark results and test methodology were audited by Richard Gimarc of Performance Metrics, Inc.</b>						
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumption about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmarks specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank You.						

## NUMERICAL QUANTITIES SUMMARY

Unisys Aquanta QR/2 Server

**Microsoft SQL Server Enterprise Edition 7.0**

**MQTh, Computed Maximum Qualified Throughput:** **19118.37**  
 % throughput difference, reported & reproducibility runs: **0.08%**

### Transaction Mix

New Order	44.82%
Payment	43.14%
Delivery	4.02%
Stock-Level	4.01%
Order-Status	4.00%

### Response Times

Transaction	Average	Maximum	90th %ile
New->Order	0.41	5.90	0.55
Payment	0.24	4.83	0.34
Delivery	0.13	1.91	0.14
Stock-Level	2.34	7.79	3.19
Order Status	0.30	4.88	0.41
Menu	0.12	3.21	0.13
Delivery (Deferred)	0.56	4.73	0.84

### Response time delay added for emulated components (seconds)

RT Response time	0.1
Menu Response time	0.1

### Keying/Think Time Times (seconds)

Transaction	Minimum	Average	Maximum
New- Order	18.00/0	18.01/12.03	18.09/120.31
Payment	3.00/0	3/12.03	3.09/120.31
Delivery	2.00/0	2/5.07	2.06/50.6
Stock-Level	2.00/0	2/5.09	2.08/50.6
Order-Status	2.00/0	2/10.06	2.05/100.72

### Test Duration

Ramp up time	47 minutes
Measurement interval (M)	30 minutes
Transactions (all types) completed during measurement interval	1279540
Ramp-down time	47 minutes

### Checkpointing:

Number of checkpoints	1
Checkpoint interval	30 minutes

# *Table of Contents*

---

Abstract .....	iv
Table of Contents .....	viii
Preface.....	xii
0. General Items .....	0-1
0.1. Order and Titles.....	0-1
0.2. Executive Summary Statement .....	0-1
0.3. Numerical Quantities Summary.....	0-1
0.4. Application Code Disclosure.....	0-1
0.5. Benchmark Sponsor .....	0-2
0.6. Parameter Settings.....	0-2
0.7. Configuration Diagrams .....	0-2
1. Clause 1: Logical Database Design .....	1-1
1.1. Table Definitions.....	1-1
1.2. Physical Organization of the Database .....	1-1
1.3. Insert and/or Delete Operations.....	1-1
1.4. Partitioning .....	1-1
1.5. Replication, Duplication or Additions.....	1-1
2. Clause 2: Transaction & Terminal Profiles .....	2-1
2.1. Random Number Generation.....	2-1
2.2. Input/Output Screen Layout .....	2-1
2.3. Priced Terminal Feature Verification .....	2-1
2.4. Presentation Managers or Intelligent Terminal .....	2-1
2.5. Transaction Statistics.....	2-1
2.6. Queuing Mechanism of Delivery.....	2-2
3. Clause 3: Transaction & System Properties .....	3-1
3.1. Transaction System Properties (ACID).....	3-1
3.2. Atomicity.....	3-1
3.2.1. Completed Transaction.....	3-1
3.2.2. Aborted Transactions .....	3-1
3.3. Consistency.....	3-1
3.4. Isolation.....	3-2

3.5.	Durability .....	3-2
3.5.1.	Loss of Log Disk and Loss of Data Disk .....	3-2
3.5.2.	Instantaneous Interruption and Loss of Memory .....	3-3

<b>4.</b>	<b>Clause 4: Scaling &amp; Database Population .....</b>	<b>4-1</b>
4.1.	Initial Cardinality of Tables .....	4-1
4.2.	Constant Values.....	4-1
4.3.	Database Layout.....	4-2
4.4.	DBMS: Data Model and DBMS Interface/Access Language.....	4-2
4.5.	DBMS Partitions/Replications .....	4-2
4.6.	DBMS Space Requirements.....	4-2
<b>5.</b>	<b>Clause 5: Performance Metrics &amp; Response Time.....</b>	<b>5-1</b>
5.1.	Measured Throughput (tpmC) .....	5-1
5.2.	Response Times .....	5-1
5.3.	Keying and Think Times .....	5-1
5.4.	Response Time Frequency Distribution Curves .....	5-2
5.5.	New Order Think Time Frequency Distribution Curve .....	5-4
5.6.	Response Time versus Throughput Performance Curve .....	5-5
5.7.	New-Order Throughput vs. Time .....	5-5
5.8.	Determination of “Steady State” .....	5-6
5.9.	Work Performed During Steady State .....	5-6
5.10.	Reproducibility.....	5-7
5.11.	Measurement Interval Duration.....	5-7
5.12.	Regulation of Transaction Mix.....	5-7
5.13.	Transaction Statistics.....	5-7
5.14.	Checkpoint Statistics .....	5-8
<b>6.</b>	<b>Clause 6: SUT, Driver &amp; Communications Definition .....</b>	<b>6-1</b>
6.1.	Remote Terminal Emulator (RTE) Description .....	6-1
6.2.	Emulated Components .....	6-1
6.3.	Functional Diagrams .....	6-1
6.4.	Network Configuration.....	6-1
6.5.	Network Bandwidth .....	6-1
6.6.	Operator Intervention .....	6-2
<b>7.</b>	<b>Clause 7: Pricing.....</b>	<b>7-1</b>
7.1.	Pricing.....	7-1
7.1.1.	System Pricing.....	7-1
7.1.2.	Maintenance Pricing.....	7-1
7.1.3.	Discounts.....	7-1
7.2.	Availability.....	7-2
7.3.	Measured tpmC, Price/Performance, and Availability Date .....	7-2

7.4.	Country-Specific Pricing.....	7-2
7.5.	Usage Pricing .....	7-2
8.	Clause 8 : Full Disclosure Availability.....	8-1
8.1.	Availability .....	8-1
9.	Clause 9 : Audit .....	9-1
9.1.	Auditor's Report.....	9-1
Appendix A - Client/Server Source .....	A-1	
Appendix B - Database Design.....	B-1	
Appendix C - Tunable Parameters.....	C-1	
Appendix D - RTE Code.....	D-1	
Appendix E - Disk Storage.....	E-1	
Appendix F - Third-Party Price Quotations .....	F-1	

# *Figures*

Figure 0.1: Benchmarked Configuration .....	0-3
Figure 0.2: Priced Configuration .....	0-3
Figure 5.1: New Order Response Time Distribution .....	5-2
Figure 5.2: Payment Response Time Distribution .....	5-2
Figure 5.3: Order Status Response Time Distribution .....	5-3
Figure 5.4: Delivery Response Time Distribution .....	5-3
Figure 5.5: Stock Level Response Time Distribution .....	5-4
Figure 5.6: New Order Think Time Distribution .....	5-4
Figure 5.7: Response Time versus Throughput .....	5-5
Figure 5.8: Throughput (tpmC) versus Time .....	5-5

# *Tables*

Table 4.1: Initial Cardinality of Database Table .....	4-1
Table 4.2: Constant C for NURand .....	4-1
Table 4.3: Disk Cage Configuration .....	4-3
Table 4.4: RAID Adapter Disk Configuration .....	4-5
Table 4.5: Disk Administrator Configuration .....	4-7
Table 5.1: Response Time Data .....	5-1
Table 5.2: Keying Times .....	5-1
Table 5.3: Think Times .....	5-1
Table 5.4: Transaction Statistics .....	5-8

## Document Structure

The TPC Benchmark C Standard Specification requires test sponsors to publish, submit to the TPC, and make available to the public, a full disclosure report for any result to be considered compliant with the specification. The required contents of the full disclosure report are specified in Clause 8.

This report is submitted to satisfy the specification's requirement for full disclosure. It documents the compliance of the benchmark implementation and execution reported for the Unisys Corporation Aquanta QS2V Server using Microsoft Windows NT 4.0 Enterprise Edition and Microsoft SQL Server Enterprise Edition 7.0.

## TPC Benchmark C Overview

The TPC Benchmark™ C Standard Specification Revision 3.4 was developed by the Transaction Processing Council (TPC). It is the intent of the TPC to develop a suite of benchmarks to measure the performance of computer systems executing a wide range of applications. Unisys and Microsoft Corporations are active participants in the TPC to define and develop such a suite of benchmarks.

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity.
- On-line and deferred transaction execution modes.
- Multiple on-line terminal sessions.
- Moderate system and application execution time.
- Significant disk input/output.
- Transaction integrity (ACID properties).
- Non-uniform distribution of data access through primary and secondary keys.
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships.
- Contention on data access and update.

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP environments, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

*The order and titles of sections in the Test Sponsor's Full Disclosure report must correspond with the order and titles of sections from the TPC-C standard specification (i.e., this document). The intent is to make it as easy as possible for readers to compare and contrast material in different Full Disclosure reports.*

The order and titles of the sections in this report correspond with those from the TPC-C standard specification.

## 0.1. Order and Titles

*The TPC Executive Summary Statement must be included near the beginning of the Full Disclosure report.*

The TPC Executive Summary Statement is included near the beginning of this report.

## 0.3. Numerical Quantities Summary

*The numerical quantities listed below must be summarized near the beginning of the Full Disclosure Report :*

- *measurement interval in minutes,*
- *number of checkpoints in the measurement interval,*
- *checkpoint interval in minutes,*
- *number of transactions (all types) completed within the measurement interval,*
- *computed Maximum Qualified Throughput in tpmC,*
- *percentage difference between reported throughput and throughput obtained in reproducibility run,*
- *ninetieth percentile, average and maximum response times for the New-Order, Payment, Order-Status, Stock-Level, Delivery (deferred and interactive) and Menu transactions,*
- *time in seconds added to response time to compensate for delays associated with emulated components,*
- *percentage of transaction mix for each transaction type.*

These numerical quantities are summarized near the beginning of this report.

## 0.4. Application Code Disclosure

*The applicable program (as defined in Clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input and output functions.*

Appendix A contains the client application code used in this TPC-C benchmark. Appendix B contains the SQL stored procedures which implement the TPC-C transactions.

## 0.5. Benchmark Sponsor

*A statement identifying the benchmark sponsor(s) and other participating companies must be provided.*

This TPC benchmark C was sponsored by Unisys Corporation. The benchmark test was developed by Microsoft and Unisys. The benchmark was conducted at Unisys, Mission Viejo, California.

## 0.6. Parameter Settings

*Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including but not limited to:*

- Data Base tuning options
- Recovery/commit options
- Consistency/locking options
- Operating system and application configuration parameters

Appendix C contains the configuration and system parameters used in running these TPC-C tests. It also contains all the client and server OS, and SQL Server tunable parameters.

## 0.7. Configuration Diagrams

*Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:*


- Number and type of processors.
- Size of allocated memory, and any specific mapping/partitioning of memory unique to the test.
- Number and type of disk units (and controllers, if applicable).
- Number of channels or bus connections to disk units, including their protocol type.
- Number of LAN (e.g., Ethernet) connections, including routers, workstations, terminals, etc., that were physically used in the test or are incorporated into the pricing structure (see Clause 8.1.8).
- Type and the run-time execution location of software components (e.g., DBMS, client processes, transaction monitors, software drivers, etc.).

The Remote Terminal Emulator (RTE) software used for these TPC-C tests is proprietary to Unisys. The benchmarked configuration of the RTE and Aquanta QS/2V server is illustrated in Figure 0.1. Tables 4.3, 4.4 and 4.5 contain a detailed explanation of the disk configuration.

The priced configuration for the Aquanta QS/2V server is shown in Figure 0.2.

**Figure 0.1: Benchmarked Configuration**

**Aquanta OS/2V Server - Benchmarked Configuration**

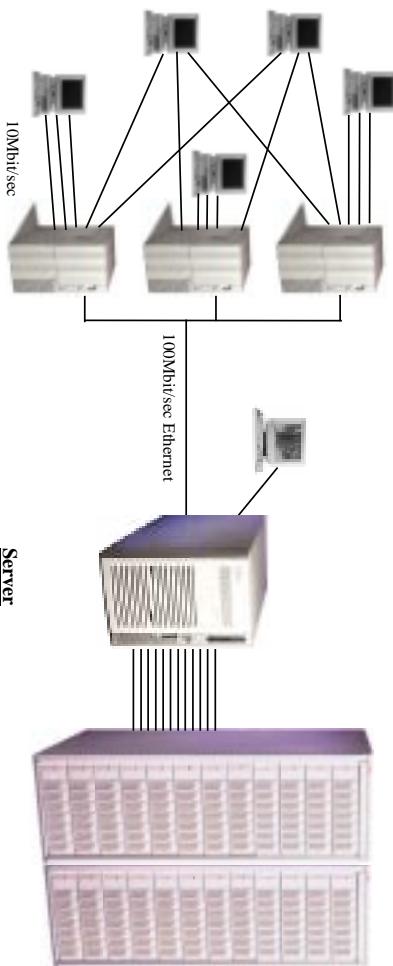

**5 RTEs**  
emulating  
15,300 users  
1020 users per LAN

**Clients (each)**  
**Aquanta GPS**  
2x 300MHz Pentium® II CPU,  
512KB L2 cache,  
256MB memory,  
1 x 2.0GB disk,


**Server**  
**Aquanta OS/2V**  
4x Pentium® II Xeon 400MHz CPUs,  
1MB L2 cache per CPU,  
4GB memory,  
1 Internal SCSI controller,  
6 PCI SCSI RAID controllers,  
1 PCI Fast Ethernet adapter

**SCSIDIisks**  
1 x 4.24GB internal,  
153 x 8.48GB,  
2 x SCSI-SCSI RAID  
Controllers

- 2 PCI Fast Ethernet adapters for Server & RTE connection,
- 1 PCI Quad Ethernet adapter for RTE connections

**Figure 0.2: Priced Configuration**

**Aquanta OS/2V Server - Priced Configuration**

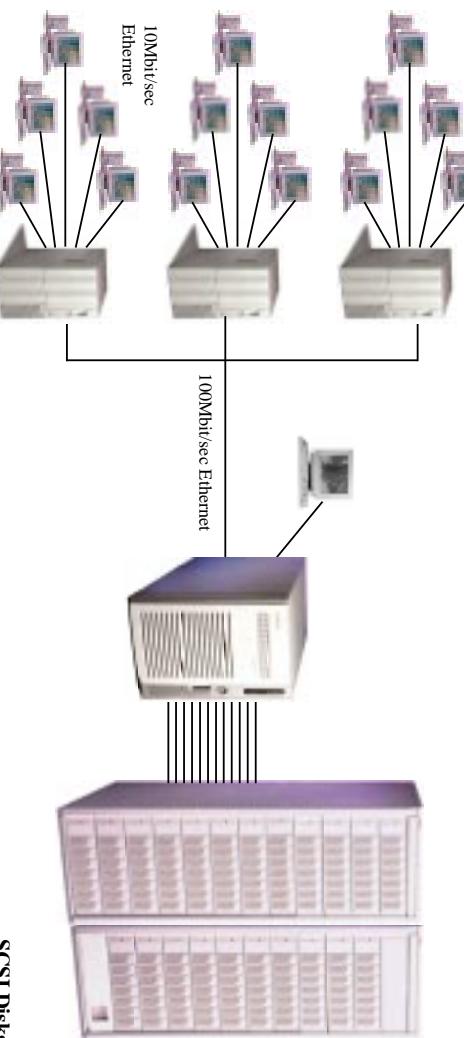

<b>15,300 PC's</b>	<b>Clients (each)</b> <b>Aquanta GPS</b>	<b>Rackmount Server</b> <b>Aquanta OS/2V</b>	<b>SCSIDIisks</b>
2x 300MHz Pentium® II CPU, 512KB L2 cache, 256MB memory, 1 x 2.0GB disk,	4x Pentium® II Xeon 400MHz CPUs, 1MB L2 cache per CPU, 4GB memory, 1 Internal SCSI controller, 6 PCI SCSI RAID controllers, 1 PCI Fast Ethernet adapter	1 x 4.24GB internal, 153 x 8.48GB, 2 x SCSI-SCSI RAID Controllers	1 Uninterruptible Power Supply
2 PCI Fast Ethernet adapters for Server & Client connection,			
1 PCI Quad Ethernet adapter for Client connections			



## **1.1. Table Definitions**

*Listings must be provided for all table definition statements and all other statements used to setup the data base.*

Appendix B contains the SQL definitions of all the required database files, filegroups, tables, indexes and stored procedures, plus a listing of the program used to load the database and establish the required initial populations of each table.

## **1.2. Physical Organization of the Database**

*The physical organization of tables and indices, within the data base, must be disclosed.*

The disk space was allocated to SQL Server according to the data in Table 4.4. The SQL definitions are contained in Appendix B.

## **1.3. Insert and/or Delete Operations**

*It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restriction in the SUT data base implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the maximum key value for these new rows.*

There were no restrictions on insert and/or delete operations to any of the tables.

## **1.4. Partitioning**

*While there are few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.*

Partitioning was not used for any table in this implementation.

## **1.5. Replication, Duplication or Additions**

*Replication of tables, if used, must be disclosed.*

*Additional and/or duplicate attributes in any table must be disclosed along with a statement on the impact on performance.*

No replications, duplications or additional attributes were used in this implementation.



## 2.1. Random Number Generation

*The method of verification for the random number generation must be disclosed.*

The drivers used the Unisys RTE program, which was independently audited. The initial population of the database was performed by the loader program from V4.01 of the Microsoft TPC-C toolkit, which was also independently audited. Furthermore, the auditor sampled various initial and runtime distributions produced by this implementation to verify correctness.

## 2.2. Input/Output Screen Layout

*The actual layout of the terminal input/output screens must be disclosed.*

The screen layouts are based on those in Clauses 2.4.3, 2.5.3, 2.6.3, 2.7.3, and 2.8.3 of the TPC Benchmark C Standard Specification. There are some minor differences in appearance due to the use of a web client implementation.

## 2.3. Priced Terminal Feature Verification

*The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).*

This was verified by the auditor.

## 2.4. Presentation Managers or Intelligent Terminal

*Any usage of presentation managers or intelligent terminals must be explained.*

Application code running on the client implemented the TPC-C user interface. A listing of this code is included in Appendix A. No presentation manager was used on the client, as screen manipulation and data input/output was handled for each user by the Microsoft Internet Explorer web browser running on each user PC.

## 2.5. Transaction Statistics

*The percentage of New-Order transactions that were rolled back as a result of an unused item number must be disclosed.*

*The number of items per order entered by New-Order transactions must be disclosed.*

*The percentage of home and remote Payment transactions must be disclosed.*

*The percentage of Payment and Order-Status transactions that used non-primary key (C\_LAST) access to the database must be disclosed.*

*The percentage of Delivery transactions that were skipped as a result of an insufficient number of rows in the NEW-ORDER table must be disclosed.*

*The mix (i.e., percentages) of transaction types seen by the SUT must be disclosed.*

Table 5.4 in Section 5 contains all these statistics.

## 2.6. Queuing Mechanism of Delivery

*The queuing mechanism used to defer execution of the Delivery transaction must be disclosed.*

Tuxedo provides the queue for delivery servers. The client application process posts delivery transactions to the delivery queue using a Tuxedo asynchronous call with the TPNNoReply option. Upon return from this call, the client application provides a 'delivery queued' response to the user. Delivery servers independently retrieve messages from their queue, submit them to the data base for processing, and log the result to a file upon completion. The source code for this delivery process is included in Appendix A.

## 3.1. Transaction System Properties (ACID)

*The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.*

The TPC Benchmark C Standard Specification defines a set of transaction processing system properties that a system under test (SUT) must support during the execution of the benchmark. Those properties are Atomicity, Consistency, Isolation, and Durability (ACID).

This section defines each of these properties, describes the steps taken to ensure that they were present during the test and describes a series of tests done to demonstrate compliance with the specification. All ACID property tests were executed successfully.

### 3.2. Atomicity

*The system under test must guarantee that data base transactions are atomic; the system will either perform all individual operations on the data, or will assure that no partially-completed operations leave any effects on the data.*

#### 3.2.1. Completed Transaction

*Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number) and verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have been changed appropriately.*

The balances from a randomly selected warehouse, district, and customer row were retrieved by customer number from a script. A Payment transaction was submitted with the same warehouse, district and customer identifiers for a known amount. After completion of the Payment transaction, the balances of the selected warehouse, district, and customer were again retrieved to verify that the changes had been made correctly.

#### 3.2.2. Aborted Transactions

*Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number) and substitute a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have NOT been changed.*

The balances from a randomly selected warehouse, district, and customer row were retrieved by customer number from a script. A Payment transaction was submitted with the same warehouse, district and customer identifiers that issued a ROLLBACK command rather than a COMMIT. After the transaction completed, the balances of the selected warehouse, district, and customer were again retrieved to verify that no changes had been made to the database.

### 3.3. Consistency

*Consistency is the property of the application that requires any execution of a data base transaction to take the data base from one consistent state to another, assuming that the data base is initially in a consistent state.*

The benchmark specification requires explicit demonstration of the following four consistency conditions:

1. The sum of the district balances in a warehouse is equal to the warehouse balance;
2. For each district, the next order id minus one is equal to maximum order id in the ORDER table and equal to the maximum new order id in the NEW ORDER table;
3. For each district, the maximum order id minus minimum order id in the ORDER table plus one equals the number of rows in the NEW-ORDER table for that district;
4. For each district, the sum of the order line counts in the ORDER table equals the number of rows in the ORDER-LINE table for that district;

In order to demonstrate this consistency, the following steps were taken:

1. Prior to the start of a benchmark run, the consistency of the database was verified by testing successfully conditions 1-4 described above with a script.
2. A run under full user load was executed for over 10 minutes with a checkpoint during the run.
3. After completion of that test, the consistency of the database was again verified by successfully testing using the same consistency script as in step 1.

## 3.4. Isolation

*Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.*

The benchmark specification defines seven required tests to be performed to demonstrate that required levels of transaction isolation are met. These tests, described in Clauses 3.4.2.1 - 3.4.2.7, were all performed from a script and verified by the auditor. In Isolation Test 7, Case A was observed. In addition, the phantom tests and stock level tests were executed and verified to be successful.

## 3.5. Durability

*The tested system must guarantee durability: the ability to preserve the effects of committed transactions and insure data base consistency after recovery from any one of the failures listed in Clause 3.5.3.*

Three durability tests were executed to satisfy the requirements of the specification. The test for loss of memory and instantaneous interruption was combined and performed with a fully scaled database with 15,300 emulated users. The loss of log and loss of data tests were performed on the same system, using a ten warehouse database with 100 emulated users. To the best of our knowledge, these tests prove that the fully scaled configuration used for the throughput test would also meet all durability tests.

### 3.5.1. Loss of Log Disk and Loss of Data Disk

The following steps were taken (using a ten warehouse database on the same system) to demonstrate durability in the case of loss of a log disk and of data disk. The same log disks and controllers were used for the log as for the fully scaled database. Two separate data disks were on each of two existing controllers.

1. The database was backed up to extra disks on a dump device.
2. The D\_NEXT\_O\_ID fields for all rows in the district table were summed up to determine the initial count of orders present in the database.
3. The RTE was started with 100 users. On the driver systems, committed and rolled back New-Order transactions were recorded in a "success" file.
4. After ten minutes of running at steady state, a hot-pluggable log disk was removed from the disk cabinet, with no effect on NT or SQL server.

5. After 5 additional minutes of operation, a hot-pluggable data disk was removed from the disk cabinet.
6. NT and SQL Server encountered IO errors due to the missing disk and recorded these errors in the NT event log and SQL Server error log, respectively. Two RTEs also recorded errors.
7. First, the RTEs and clients were stopped, then SQL Server was used to take a dump of the transaction log to the dump device.
8. Next, SQL server was shutdown, then restarted, and scripts were executed to drop the database and all its devices. Then, SQL Server was shutdown again and the SUT shutdown.
9. A data disk was inserted in the disk cabinet to replace the one removed. The RAID controller was used to recreate the stripe set containing the new data disk. (The missing log drive was not replaced.)
10. The SUT was restarted, and Disk Administrator was used to assign the proper drive letter to the new volume. SQL Server was then restarted and a new (empty) database created as part of the restore database process. That process loaded the initial database into the new database, but did not perform any recovery. Next the transaction log was restored, followed by transaction recovery. The latter step restored all committed transactions to the database.
11. Consistency condition 3 of Clause 3.3.2.3 was executed to verify database consistency.
12. Step 2 was repeated to determine the total number of orders. This number was subtracted from the count obtained previously in Step 2 to determine the number of additional orders added to the database.
13. The contents of the “success” files on the drivers were sampled to verify that the records in the “success” file for committed New-Order transactions had corresponding records in the ORDER table and no entries existed for rolled back transactions. Moreover, the counts were matched with those obtained in step 12.

### 3.5.2. Instantaneous Interruption and Loss of Memory

Instantaneous interruption and loss of memory tests were combined because the loss of power erased the contents of memory. This failure was induced by removing the primary power to the System Under Test while the benchmark was executing.

1. The D\_NEXT\_O\_ID fields for all rows in the district table were summed up to determine the initial count of orders present in the database (count1).
2. On the driver systems, committed and rolled back New-Order transaction were recorded in a “success” file.
3. The benchmark was executed at full load with 15,300 emulated users for a minimum of 10 minutes.
4. Shortly after execution of a checkpoint completed, the system’s primary power was turned off.
5. After transaction failures were noted by the RTEs, the RTEs and clients were shutdown.
6. Power was restored to the SUT, the system rebooted, SQL Server was restarted, and automatic database recovery was performed. The database recovery used the transaction log to reapply all committed transactions and rollback any (in progress) uncommitted transactions, so that the database disks were correct.
7. After recovery finished, Consistency Condition of Clause 3.3.2.3 (no gaps in NO\_O\_ID) was executed to verify that the database was consistent.
8. Next, samples of the contents of the “success” file on the driver were compared against corresponding rows of the ORDER table to verify that records in the “success” file for committed New-Order transactions had corresponding records in the ORDER table and no entries existed for rolled back transactions.
9. Finally, step 1 was repeated to determine the total number of orders (count2). Count2 minus count1 was not less than the number of committed New-Order records in the “success” file.



## 4.1. Initial Cardinality of Tables

The Cardinality (e.g., the number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted (see Clause 4.2.2 and the Auditor's attestation letter) the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

The TPC-C database for this test was configured with 1,530 warehouses. The cardinality of each table in the database is listed in Table 4.1

**Table 4.1: Initial Cardinality of Database Table**

Table	Occurrences
Warehouse	1,530
District	15,300
Customer	45,900,000
History	45,900,000
Order	45,900,000
New-Order	13,770,000
Order Line	459,001,971
Stock	15,300,000
Item	100,000

No rows were deleted from the warehouse table before executing the measurement runs.

## 4.2. Constant Values

The following values were used as the constant C input values to the NURand function during Build and Run time for this implementation.

**Table 4.2: Constant C for NURand**

Function	Value
C_LAST (Build)	123
C_LAST (Run)	208

### **4.3. Database Layout**

*The distribution of tables and logs across all media must be explicitly depicted for the tested and priced systems.*

Tables 4.3, 4.4 and 4.5 list the distribution of the database over 140 disks and the transaction log over six mirrored pairs of disks for the benchmark configuration. In addition, there was one disk containing Windows NT Enterprise Edition and SQL Server Enterprise Edition code and the Master database plus the paging file. Database backup used 16 extra disks. These 16 backup disks were unused during in the benchmark and were excluded from the priced configuration. The priced configuration included one extra 9GB disk.

### **4.4. DBMS: Data Model and DBMS Interface/Access Language**

*A statement must be provided that describes:*

- 1. The data model implemented by the DBMS used (e.g., relational, network, hierarchical).*
- 2. The database interface (e.g., embedded, call level) and access language (e.g., SQL, DLL, COBOL, read/write) used to implement the TPC-C transactions. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server Enterprise Edition 7.0 is a relational DBMS.

The client software interfaced to SQL Server through Stored Procedures invoked through Remote Procedure Calls embedded in the C application code. Specifically, DBLIB and TCP/IP sockets were used.

### **4.5. DBMS Partitions/Replications**

*The mapping of database partitions/replications must be explicitly described.*

No table partitioning or replication was done.

### **4.6. DBMS Space Requirements**

*Details of the 180 day space computation along with proof that the database is configured to sustain 8 hours of growth for dynamic tables (Order, Order-line, and History) must be disclosed (see Clause 4.2.3).*

Appendix E lists the space requirements for the 180-day space as well as the logical log space for eight hours.

Table 4.3: Disk Cage Configuration

Disk Cage Configuration									
Adapter	Channel	Id	Id	Id	Id	Id	Id	Id	Rack #
1	0	0	9GB	9GB	9GB	9GB	9GB	9GB	empty
	1	0	1	1	2	3	4	5	6
2	0	0	1	2	3	4	5	6	1
	1	0	9GB	9GB	9GB	9GB	9GB	9GB	empty
3	0	0	1	2	3	4	5	6	2
	1	0	9GB	9GB	9GB	9GB	9GB	9GB	empty
4	0	0	1	2	3	4	5	6	3
	1	0	9GB	9GB	9GB	9GB	9GB	9GB	empty
5	0	0	1	2	3	4	5	6	4
	1	0	9GB	9GB	9GB	9GB	9GB	9GB	empty

Disk Cage Configuration										
Adapter	Channel	Id	Rack #							
6	0	0	1	2	3	4	5	6	7	19
		9GB								
	8	9	10	11	12	13	14	15	16	20
1	0	1	2	3	4	5	6	7	8	21
	9GB	9GB	9GB	9GB	9GB	9GB	9GB	9GB	9GB	
	8	9	10	11	12	13	14	15	16	22
2	0	1	2	3	4	5	6	7	8	*
	9GB	9GB	9GB	9GB	9GB	9GB	9GB	9GB	9GB	
	9GB	9GB	9GB	9GB	9GB	9GB	9GB	9GB	9GB	
	8	9	10	11	12	13	14	15	16	
	9GB	empty	*							

**Table 4.4: RAID Adapter Disk Configuration**

RAID Adapter Disk Configuration						
Adapter	ID	Channel 0	Channel 1	Channel 2	RAID Configuration	Drive Letters
1	0	A0	A1		Arrange Pack A as RAID 1 (log)	L:
	1			2		
	2			3		
	3			4		
	4			5		
	5			6		
2	0	A0	C0		Arrange Packs A - D as RAID 0	E: and Q:
	1	A1	C1			
	2	A2	C2			
	3	A3	C3			
	4	A4	C4			
	5	A5	C5			
	6	A6	C6			
	8	B0	D0			
	9	B1	D1			
	10	B2	D2			
	11	B3	D3			
	12	B4	D4			
	13	B5	D5			
	14	B6	D6			
3	0	A0	C0	E0	Arrange Packs A - D as RAID 0	F: and P:
	1	A1	C1	E1		
	2	A2	C2	E2		
	3	A3	C3	E3		
	4	A4	C4	E4		
	5	A5	C5	E5		
	6	A6	C6	E6		
	8	B0	D0	E7	Arrange Pack E as RAID 5 (Backup)	R:
	9	B1	D1			
	10	B2	D2			
	11	B3	D3			
	12	B4	D4			
	13	B5	D5			
	14	B6	D6			
4	0	A0	C0		Arrange Packs A - D as RAID 0	G: and O:
	1	A1	C1			
	2	A2	C2			
	3	A3	C3			
	4	A4	C4			
	5	A5	C5			
	6	A6	C6			
	8	B0	D0			
	9	B1	D1			
	10	B2	D2			
	11	B3	D3			
	12	B4	D4			
	13	B5	D5			
	14	B6	D6			

### RAID Adapter Disk Configuration

Adapter	ID	Channel 0	Channel 1	Channel 2	RAID Configuration	Drive Letters
5	0	A0	C0			
	1	A1	C1			
	2	A2	C2			
	3	A3	C3			
	4	A4	C4			
	5	A5	C5			
	6	A6	C6			
	8	B0	D0			
	9	B1	D1			
	10	B2	D2			
	11	B3	D3			
	12	B4	D4			
	13	B5	D5			
	14	B6	D6			
6	0	A0	C0	E0	Arrange Packs A - D as RAID 0	I: and M:
	1	A1	C1	E1		
	2	A2	C2	E2		
	3	A3	C3	E3		
	4	A4	C4	E4		
	5	A5	C5	E5		
	6	A6	C6	E6		
	8	B0	D0	E7	Arrange Pack E as RAID 5 (backup)	S:
	9	B1	D1			
	10	B2	D2			
	11	B3	D3			
	12	B4	D4			
	13	B5	D5			
	14	B6	D6			

**Table 4.5: Disk Administrator Configuration**

<b>Disk Administrator Configuration</b>	
Disk 0	C:
4338 MB	SYSTEM
	FAT
2047 MB	NTFS
	unused
0 MB	
Disk 1	L:
52097 MB	unknown
	50000 MB
	unused
	2097 MB
Disk 2	E:
243124 MB	Q:
	unknown
	unknown
18405 MB	unknown
	unused
	215914 MB
Disk 3	F:
243124 MB	P:
	unknown
	unknown
18405 MB	unknown
	unused
	215914 MB
Disk 4	R:
60781 MB	BACK1
	NTFS
60781 MB	unused
	0 MB
Disk 5	G:
243124 MB	O:
	unknown
	unknown
18405 MB	unknown
	unused
	215914 MB
Disk 6	H:
243124 MB	N:
	unknown
	unknown
18405 MB	unknown
	unused
	215914 MB
Disk 7	I:
243124 MB	M:
	unknown
	unknown
18405 MB	unknown
	unused
	215914 MB
Disk 8	S:
60781 MB	BACK2
	NTFS
60781 MB	unused
	0 MB
CD-ROM 0	D:



## 5. Clause 5: Performance Metrics & Response Time

### 5.1. Measured Throughput (tpmC)

*Measured tpmC must be reported.*

The measured tpmC was 19118.37.

### 5.2. Response Times

*Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the Menu response time.*

Table 5.1: Response Time Data

Transaction	Average	Maximum	90th %ile
New-Order	0.41	5.90	0.55
Payment	0.24	4.83	0.34
Delivery	0.13	1.91	0.14
Stock-Level	2.34	7.79	3.19
Order Status	0.30	4.88	0.41
Menu	0.12	3.21	0.13
Delivery(Deferred)	0.56	4.73	0.84

### 5.3. Keying and Think Times

*The minimum, the average, and the maximum keying and think times must be reported for each transaction type.*

Table 5.2: Keying Times

Transaction	Minimum	Average	Maximum
New-Order	18.00	18.01	18.09
Payment	3.00	3.00	3.09
Delivery	2.00	2.00	2.06
Stock-Level	2.00	2.00	2.08
Order Status	2.00	2.00	2.05

Table 5.3: Think Times

Transaction	Minimum	Average	Maximum
New-Order	0.00	12.03	120.31
Payment	0.00	12.03	120.31
Delivery	0.00	5.07	50.60
Stock-Level	0.00	5.09	50.60
Order Status	0.00	10.06	100.72

## 5.4. Response Time Frequency Distribution Curves

*Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.*

Figure 5.1: New Order Response Time Distribution

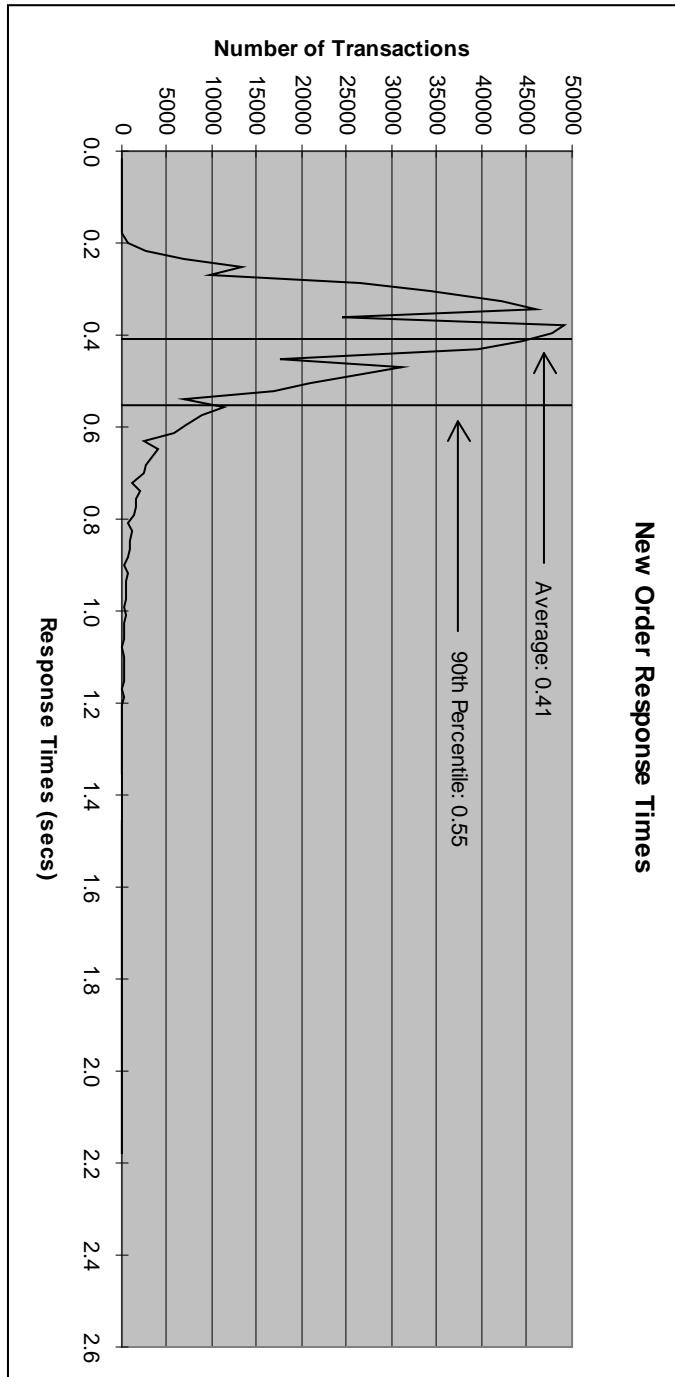


Figure 5.2: Payment Response Time Distribution

Payment Response Times

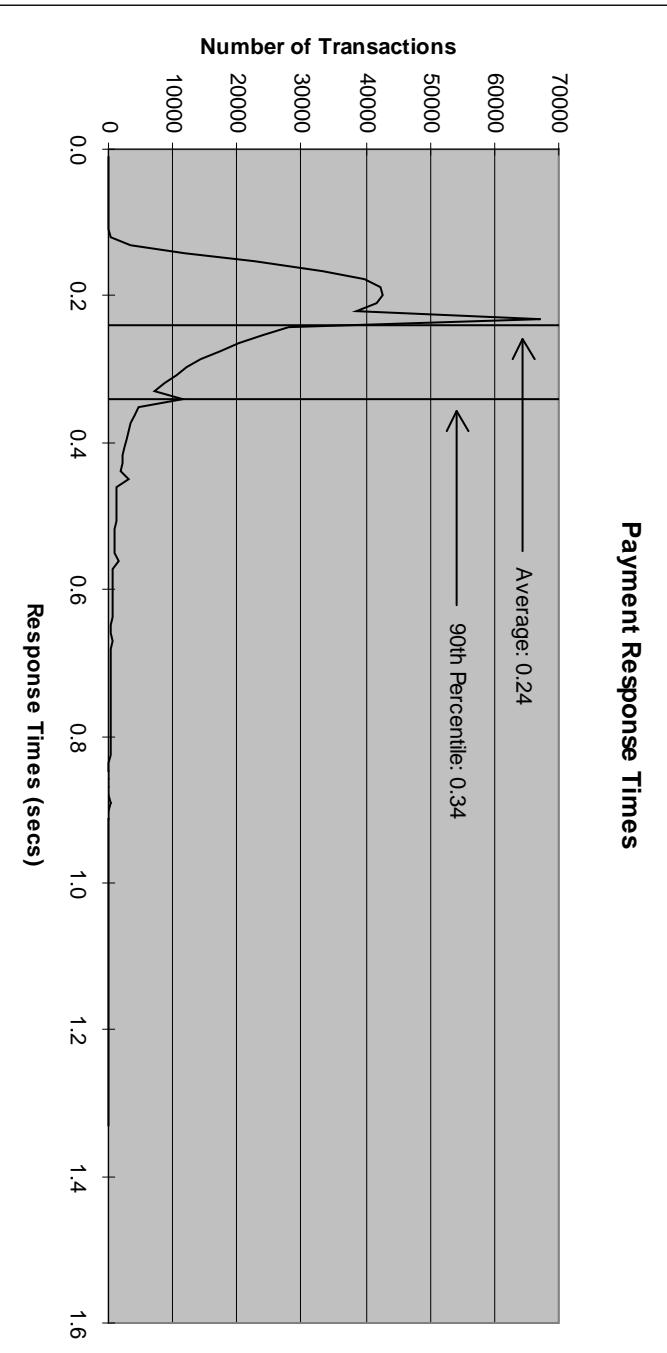


Figure 5.3: Order Status Response Time Distribution



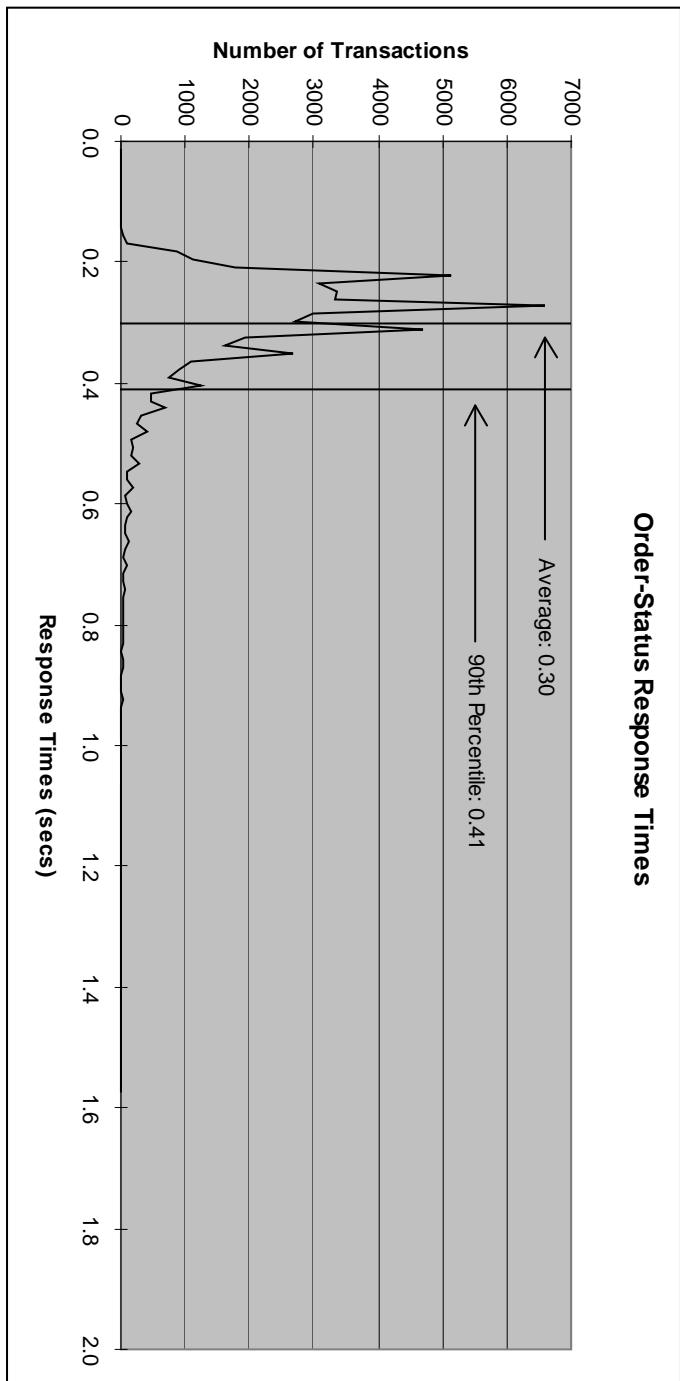


Figure 5.4: Delivery Response Time Distribution




**Figure 5.5: Stock Level Response Time Distribution**

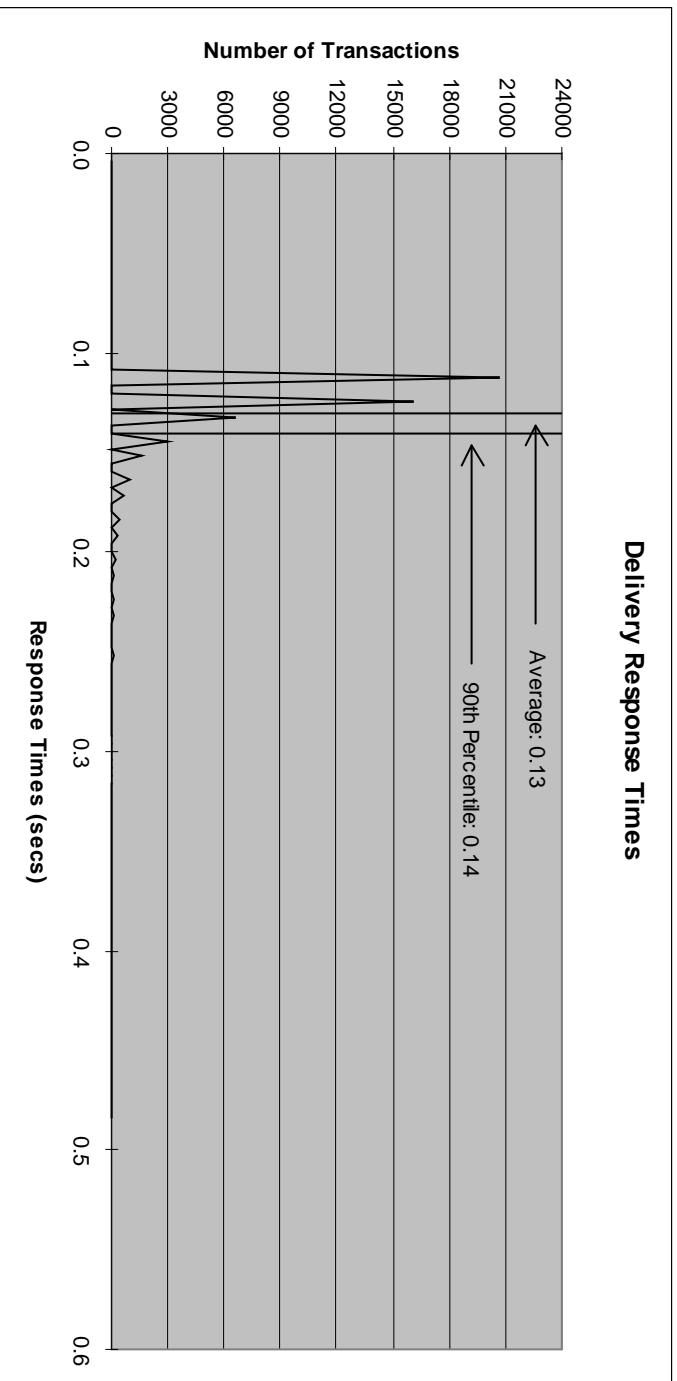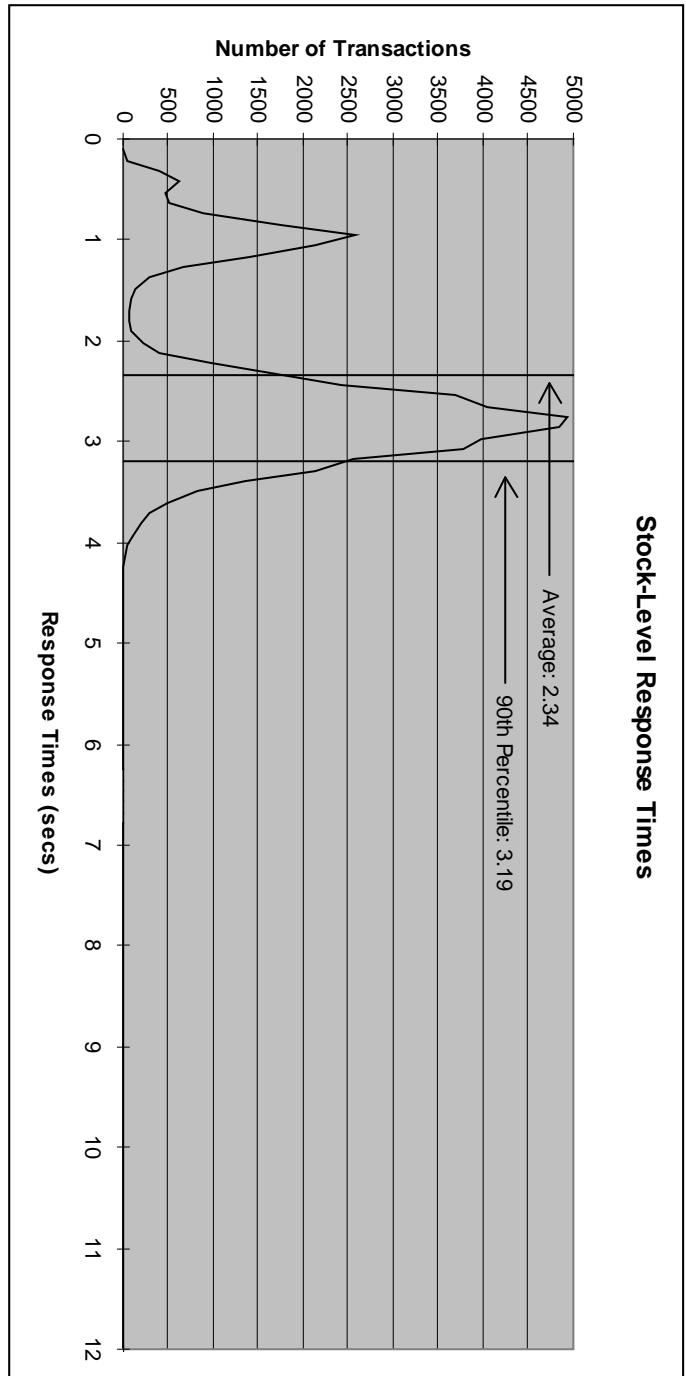

## 5.5. New Order Think Time Frequency Distribution Curve

*Think Time frequency distribution curve (see Clause 5.6.3) must be reported for the New-Order transaction.*


**Figure 5.6: New Order Think Time Distribution**

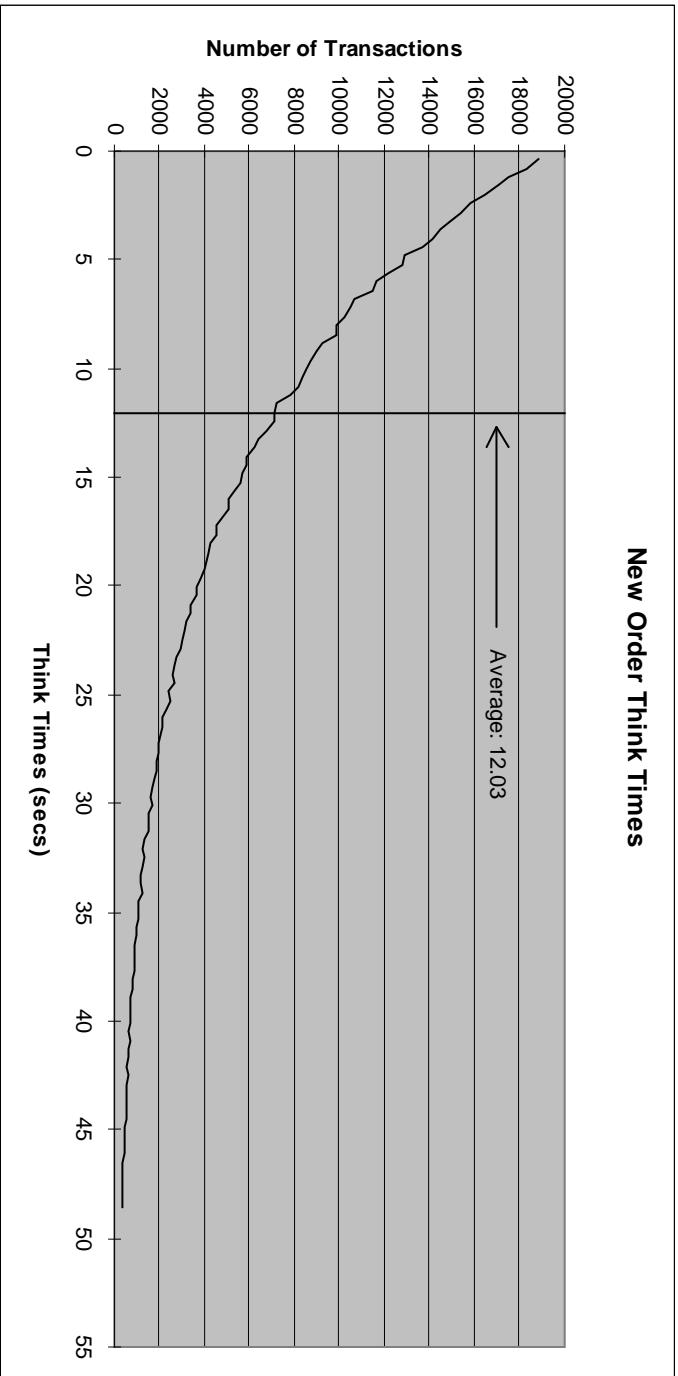

## 5.6. Response Time versus Throughput Performance Curve

The performance curve for response times versus throughput (Clause 5.6.2) must be reported for the New-Order transaction


Figure 5.7: Response Time versus Throughput

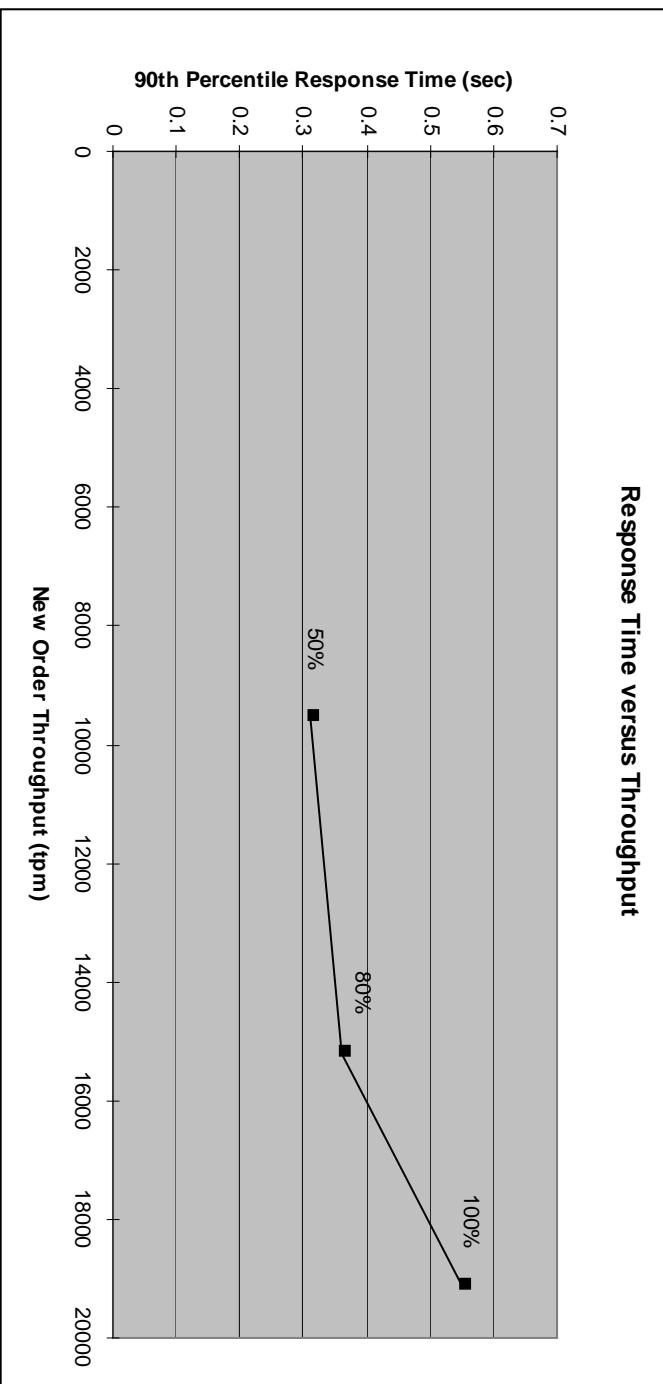

## 5.7. New-Order Throughput vs. Time

A graph of throughput versus elapsed time (Clause 5.6.5) must be reported for the New-Order transaction.

Figure 5.8: Throughput (tpmC) versus Time

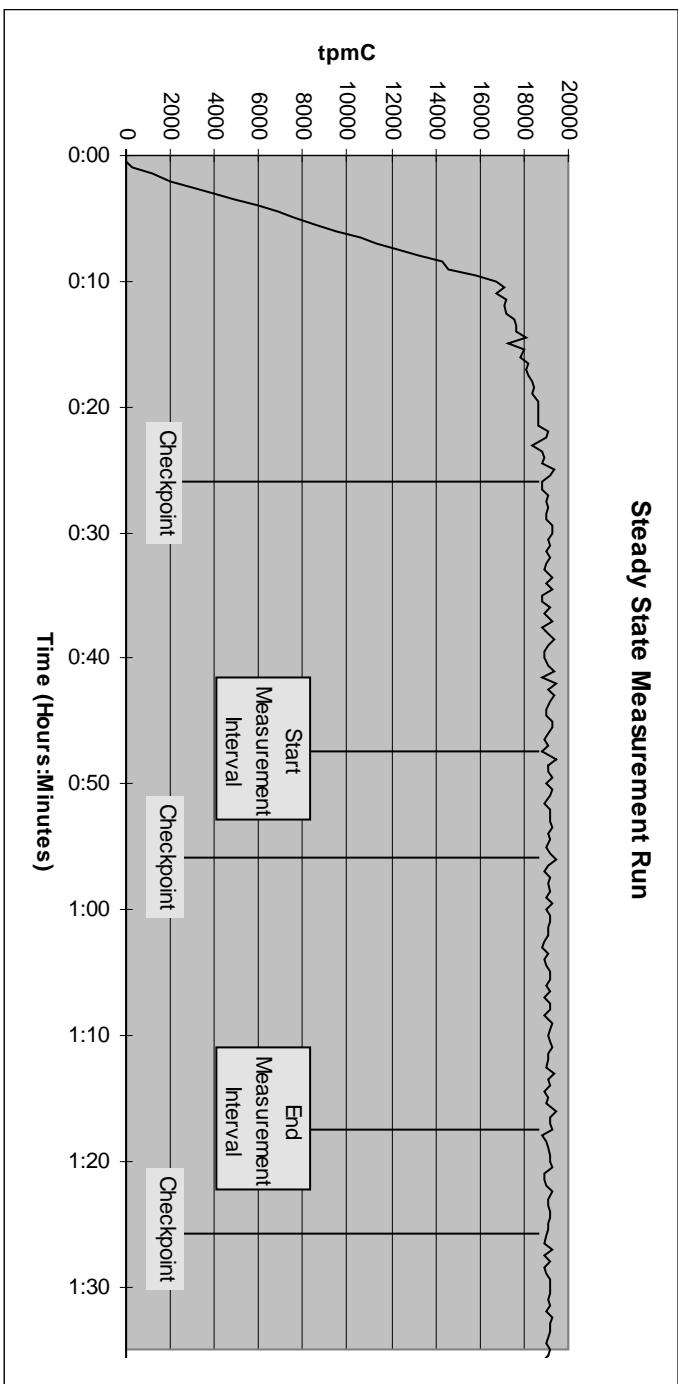

## 5.8. Determination of ‘Steady State’

*The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval (see Clause 5.5) must be described.*

The transaction throughput rate (tpmC) and response time were relatively constant after the initial ‘ramp up’ period. The throughput and response time behavior were determined by examining data reported for each 30-second interval over the duration of the benchmark. Ramp-up, steady state, and ramp-down regions are discernible in the graph presented in Figure 5.8.

## 5.9. Work Performed During Steady State

*A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.) actually occurred during the measurement interval must be reported.*

The RTE selects a transaction type from the menu and prepares to request the appropriate blank form. A timestamp is taken before the form request is sent and after the response is returned. The difference between the two is saved off as the menu response time. The RTE then generates input data for the transaction to create a completed form and waits the appropriate key time. A timestamp is taken before the completed form is sent and after the response is returned. The difference between these two is saved off as the transaction response time. Both response times are padded with a 0.1 second delay per spec to account for the web browser delay. The appropriate transaction data and response times are logged and the RTE waits the required think time interval before repeating the process. Each RTE driver maintains its own log file. Log file contents are consolidated for the reports.

The RTE emulates web browsers (not terminals) in this client-server implementation. The RTE sends and receives HTML formatted data using HTTP through Ethernet LANs to a client application running on the client machine. The client application processes the request, sends the transaction to a Tuxedo TPC-C application server queue, waits for the transaction response (except for delivery), and returns an appropriately formatted HTML form back to the (emulated) web browser (RTE). The Tuxedo TPC-C application server retrieves a message from its queue, invokes request processing via a stored procedure on the database server using Microsoft SQL Server DBLIB and RPC through sockets over another Ethernet LAN, accepts the response, and returns a result to the client application (via Tuxedo). For delivery transactions, the client application does not wait for the Tuxedo TPC-C delivery server to respond. Each delivery server logs its results to its own file. The delivery report files are consolidated for reports.

To perform checkpoints at specific intervals, SQL Server’s checkpoint interval was set to the maximum allowable value and a utility was written to schedule checkpoints at 30 minute intervals and record the start and end time of each checkpoint. The checkpoint script was started manually on one of the client machines after the RTE had all users logged in and sending transactions and a steady state had been achieved. Using this information, the positioning of the checkpoint within the measurement interval was verified to be clear of the guard zones.

At each checkpoint, SQL Server wrote to disk all database pages in memory that had been updated but not yet physically written to the disk. Upon completion of the checkpoint, SQL Server also wrote records to the transaction log indicating that a checkpoint had completed.

## **5.10. Reproducibility**

*A description of the method used to determine the reproducibility of the measurement results must be reported.*

In a repeat test, carried out in the same manner as the primary test, a throughput of 19,102.63 tpmC was achieved on the same database during a 30-minute, steady state run. All required transaction statistics were met. See the Auditor's attestation letter for details.

## **5.11. Measurement Interval Duration**

*A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.*

The measurement interval was 30 minutes.

## **5.12. Regulation of Transaction Mix**

*The method of regulation of the transaction mix (e.g. card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.*

The RTE was given a weighed random distribution which could not be adjusted during the run.

## **5.13. Transaction Statistics**

*The percentage of the total mix for each transaction type must be disclosed.*

*The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed.*

*The average number of order-lines entered per New-Order transaction must be disclosed.*

*The percentage of remote order-lines entered per New-Order transaction must be disclosed.*

*The percentage of remote Payment transactions must be disclosed.*

*The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed.*

*The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.*

Table 5.4 shows this information.

**Table 5.4: Transaction Statistics**

Transaction Type	Statistics	Value
New Order	Rolledback transactions	1.00%
	Home warehouse	99.00%
	Remote warehouse	1.00%
Payment	Average Items per Order	9.99
	Home warehouse	85.09%
Order Status	Remote warehouse	14.91 %
	Non-primary key access	60.06%
Delivery	Non-primary key access	60.23%
	Skipped transactions (Interactive)	0
	Skipped transaction counts (Deferred)	0
Transaction Mix	Skipped District counts (Deferred)	0
	New Order	44.82%
	Payment	43.14%
	Delivery	4.02%
Stock-Level	Stock-Level	4.01%
	Order-Status	4.00%

## 5.14. Checkpoint Statistics

*The number of checkpoints in the measurement interval, the time in seconds from the start of the measurement interval to the first checkpoint, and the Checkpoint Interval must be disclosed.*

There is one checkpoint in the measurement interval. The checkpoint starts 501 seconds into the measurement interval. The checkpoint interval is 30 minutes (from the start of one to the start of the next) and a checkpoint lasts approximately 6 minutes. In conformance with Clause 5.2.2 there is no checkpoint within a span of 7.5 minutes before or after the beginning or end of the measurement interval.

## **6. Clause 6: SUT, Driver & Communications Definition**

---

### **6.1. Remote Terminal Emulator (RTE) Description**

*The RTE input parameters, code fragments, functions, etc. used to generate each transaction input field must be disclosed.*

The RTE used is proprietary to Unisys. Appendix D contains the profile used as input to this RTE.

### **6.2. Emulated Components**

*It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to that of the priced system.*

There were no emulated components in the benchmark configuration other than the emulated web browsers on the users' PCs.

### **6.3. Functional Diagrams**

*A complete functional diagram of both the benchmark and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.*

Section 0.7 describes and shows functional diagrams of the benchmarked and priced systems.

### **6.4. Network Configuration**

*The network configuration of both the tested and proposed (target) services which are being represented and a thorough explanation of exactly which parts are being replaced with the Driver System must be disclosed.*

Figures 0.1 and 0.2 in Section 0.7 also diagram the network configurations of the benchmark and configured systems and represent the RTEs connected via LAN replacing the user PCs that are directly connected via LAN.

### **6.5. Network Bandwidth**

*The bandwidth of the network(s) used in the tested/priced configuration must be disclosed.*

Ethernet local area networks (LAN) are used in the priced and tested configurations. The database server (SUT) contains a single 10/100 megabit per second LAN adapter connecting it to the client systems. This LAN segment is run at 100 megabits per second in both the priced and tested configuration.

Each client contains two 10/100 megabit per second LAN adapters and one quad LAN adapter that supports four 10/100 megabit per second LAN segments. One 10/100 megabit per second LAN adapter connects to a LAN segment that communicates with the SUT at 100 megabits per second in both the priced and tested configuration. All other

LAN adapters are connected to LAN segments running at 10 megabits per second in both the priced and tested configurations.

In the priced configuration, each client is connected to workstations (PCs running web browsers) spread over five 10 megabit per second LAN segments.

In the tested configuration, each client is connected to RTE driver systems emulating web browsers spread over five 10 megabit per second LAN segments.

## 6.6. Operator Intervention

*If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.*

No operator intervention was required to sustain eight hours of operation at the reported throughput.

## **7.1. Pricing**

*A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source(s) and effective date(s) must also be reported.*

*The total 5-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.*

*System pricing should include subtotals for the following components: Server Hardware, Server Software, Client Hardware, Client Software, and Network Components used for terminal connection (see Clause 7.2.2.3). Clause 6.1 describes the Server and Client components.*

*System pricing must include line item indication where non-sponsoring companies' brands are used. System pricing must also include line item indication of third party pricing.*

A detailed list of hardware and software components along with their part numbers and prices are given in the Executive Summary near the beginning of this document.

### **7.1.1. System Pricing**

Each priced configuration consists of an integrated system package, additional options, and components. Prices for all products are US list prices. A three year warranty is standard with this class of Unisys server products.

### **7.1.2. Maintenance Pricing**

The five year support pricing for Unisys Corporation Open Business Server products is based on a 36-month warranty on hardware, upgraded to service level Performance-Gold, plus an additional 24 months of support at service level Performance-Gold. Microsoft and BEA support pricing is based on 60 months of monthly support costs.

Unisys Corporation Standard Performance-Gold Support: four hour maximum response, onsite support for hardware provides service from 8:00 A.M. to 5:00 P.M., Monday through Friday. Service requests made as late as 5:00 P.M. will receive a response the same day.

Netslurx and Data Comm Warehouse provide return-to-factory replacement within seven days. Server disks are covered by Western Micro's seven day return-to-factory warranty. Appropriate spares are included in the priced configuration.

### **7.1.3. Discounts**

Unisys provides a standard pre-pay discount for maintenance service of the client, server and storage components of the priced configuration.

Western Micro provides a standard dollar-volume discount to the client, server and storage components of the priced configuration.

## 7.2. Availability

*The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system includes products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.*

The hardware, software and support/maintenance products priced in this benchmark are detailed on page vi.

Microsoft SQL Server Enterprise Edition 7.0 will be available by December 29, 1998. All other components are available.

## 7.3. Measured tpmC, Price/Performance, and Availability Date

*A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.*

Unisys Corporation Aquanta QS2V Server, with Microsoft Windows NT Server Enterprise Edition 4.0 and SQL Server Enterprise Edition 7.0, achieved 19,118.37 tpmC at \$22.11 per tpmC. All components will be available by December 29, 1998.

## 7.4. Country-Specific Pricing

*Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7.*

None.

## 7.5. Usage Pricing

*For any usage pricing, the sponsor must disclose:*

- *Usage level at which the component was priced.*
- *A statement of the company policy allowing such pricing.*

The component pricing based on usage is shown below:

- One (1) Microsoft Windows NT Server Enterprise Edition 4.0 license
- One (1) Microsoft SQL 7.0 Server Enterprise Edition license
- Three (3) Microsoft Windows NT Server 4.0 Licenses
- One (1) Microsoft Visual C++ Professional 5.0
- Three (3) BEA Tuxedo 6.3 CFS for NT licenses

Microsoft SQL Server & Internet Information Server and BEA Tuxedo were priced for an unlimited number of users.

## **8.**

## **Clause 8 : Full Disclosure Availability**

### **8.1. Availability**

*The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to charges for similar documents by that test sponsor.*

Copies of this Full Disclosure Report may be obtained by contacting:

TPC Benchmark Administrator  
Systems Analysis, Modeling & Measurement Group  
Unisys Corporation, M/S 262  
25725 Jeronimo Road  
Mission Viejo, CA 92691  
USA



## **9.**

---

## ***Clause 9 : Audit***

### **9.1. Auditor's Report**

*The auditor's name, address, phone number and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.*

This implementation of the TPC Benchmark C on the Unisys Aquanta QS/2V Server was audited by Richard Gimarc, a TPC certified auditor of:

Performance Metrics Inc.,  
2229 Benita Drive, Suite 101,  
Rancho Cordova, CA 95670.

(916) 635-2822 Fax: (916) 858-0109  
e-mail: Richard@PerfMetrics.com

The attestation letter is shown on the next page.

---

## **PERFORMANCE METRICS INC.**

---

### **TPC Certified Auditors**

---

Jerrold Buggert

Director of Modeling and Measurement

Unisys Corporation

25725 Jeronimo Road

Mission Viejo, CA 92691

December 2, 1998

I have verified the TPC Benchmark™ C for the following configuration:

Platform: Unisys Aquanta QS/2V Server

Database Manager: Microsoft SQL Server Enterprise Edition 7.0

Operating System: Microsoft Windows NT Server Enterprise Edition 4.0 (SP4)

Transaction Manager: BEA TUXEDO CFS 6.3 for NT

CPUs	Memory	Disks	New-Order Response Time @ 90%	tpmC
<b>Server: Unisys Aquanta QS/2V Server</b>				
4 Pentium II Xeon @ 400 MHz	Main: 4 GB L2 Cache: 1 MB	5 @ 4.23 GB 168 @ 8.48 GB	0.55 sec.	19,118.37
<b>3 Clients: Unisys Aquanta GPS</b>				
2 Pentium II @ 300 MHz	Main: 256 MB L2 Cache: 512 KB	1 @ 2.02 GB	n/a	n/a

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database was properly sized and populated.
- The database was properly scaled with 1,530 warehouses.
- The ACID properties were met.
- The durability data loss and log loss tests were performed on a 10-warehouse database.
- Input data was generated according to the specified percentages.

## **PERFORMANCE METRICS INC.**


### **TPC Certified Auditors**

- Eight hours of mirrored log space was configured on the priced system.
- Eight hours of dynamic table growth space was configured on the measured system.
- The following server disks contained backup and other data and were not active during measurement: four 4.23 GB disks and sixteen 8.48 GB disks. These 20 disks were not included in the priced configuration.
- The 180-day space calculation was verified. One 8.48 GB disk was added to the priced configuration to satisfy this requirement.
- Measurement cycle times included a 01 second menu and a 0.1 second response time delay for an emulated Web browser.
- The steady state portion of the test was 30 minutes.
- One checkpoint was taken during the steady state portion of the test.
- Checkpoints were verified to be clear of the guard zones.
- There were 15,300 user contexts present on the system.
- Each emulated user started with a different random number seed.
- The NURand constants used for database load and at run time were verified.
- System pricing was checked for major components and maintenance.

#### **Additional Audit Notes:**

This benchmark measurement was performed on an Aquanta QS/2V Server, but both an Aquanta QS/2V and an Aquanta QR/2V configuration were priced. It is my opinion that all active components in both of these priced configurations are identical.

Regards,



Richard L. Gimarc  
Auditor



# Appendix A - Client/Server Source

## CLIENT MAKEFILE

```
# Microsoft Developer Studio Generated NMAKE File, Format Version 4.20
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

!IF "$(CFG)" == ""
CFG=tpcc - Win32 Debug
!MESSAGE No configuration specified. Defaulting to tpcc - Win32 Debug.
!ENDIF

!IF "$(CFG)" != "tpcc - Win32 Release" && "$(CFG)" != "tpcc - Win32 Debug"
!MESSAGE Invalid configuration "$(CFG)" specified.
!MESSAGE You can specify a configuration when running NMAKE on this
makefile
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc.mak" CFG="tpcc - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc - Win32 Release" (based on "Win32 (x86) Dynamic-Link
Library")
!MESSAGE "tpcc - Win32 Debug" (based on "Win32 (x86) Dynamic-Link
Library")
!MESSAGE
!ERROR An invalid configuration is specified.
!ENDIF

!IF "$(OS)" == "Windows_NT"
NULL=
!ELSE
NULL=nul
!ENDIF
#####
## Begin Project
# PROP Target_Last_Scanned "tpcc - Win32 Release"
CPP=cl.exe
RSC=rc.exe
MTL=mktypplib.exe

!IF "$(CFG)" == "tpcc - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir "Release"
```

```
# PROP Intermediate_Dir "Release"
# PROP Target_Dir ""
OUTDIR=.\\Release
INTDIR=.\\Release

ALL : "$(OUTDIR)\\tpcc.dll"

CLEAN :
-@erase "$(INTDIR)\\diagio.obj"
-@erase "$(INTDIR)\\term.obj"
-@erase "$(INTDIR)\\timesupp.obj"
-@erase "$(INTDIR)\\tmon.obj"
-@erase "$(INTDIR)\\TPCC.OBJ"
-@erase "$(INTDIR)\\tpchandler.obj"
-@erase "$(OUTDIR)\\tpcc.dll"
-@erase "$(OUTDIR)\\tpcc.exp"
-@erase "$(OUTDIR)\\tpcc.lib"

"$(OUTDIR)" :
    if not exist "$(OUTDIR)$(NULL)" mkdir "$(OUTDIR)"

# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D
"WINDOWS" /YX /c
# ADD CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "WINDOWS" /YX
/C
CPP_PROJ=/nologo /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "WINDOWS" \
/Fp"$(INTDIR)/tpcc.pch" /YX /Fo"$(INTDIR)\" /c
CPP_OBJS=.\\Release/
CPP_SRCS=.\\
# ADD BASE MTL /nologo /D "NDEBUG" /win32
# ADD MTL /nologo /D "NDEBUG" /win32
MTL_PROJ=/nologo /D "NDEBUG" /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$(OUTDIR)/tpcc.bsc"
BSC32_SRCS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbc32.lib /nologo /subsystem:windows /dll /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib libtux.lib libbuft.lib libtux2.lib libfml.lib libfml32.lib
libgp.lib /nologo /subsystem:windows /dll /machine:I386
# SUBTRACT LINK32 /verbose /nodefaultlib
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib\
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib\
odbc32.lib libtux.lib libbuft.lib libtux2.lib libfml.lib libfml32.lib\
libgp.lib /nologo /subsystem:windows /dll /incremental:no\
/pdb:"$(OUTDIR)/tpcc.pdb" /machine:I386 /def:".\\tpcc.def"\
/out:"$(OUTDIR)/tpcc.dll" /implib:"$(OUTDIR)/tpcc.lib"
DEF_FILE= \
```

```

".\tpcc.def"
LINK32_OBJS= \
    "$(INTDIR)\diagio.obj" \
    "$(INTDIR)\term.obj" \
    "$(INTDIR)\timesupp.obj" \
    "$(INTDIR)\tmon.obj" \
    "$(INTDIR)\TPCC.OBJ" \
    "$(INTDIR)\tpchandler.obj"

"$(OUTDIR)\tpcc.dll" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ELSEIF "$(CFG)" == "tpcc - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir "Debug"
# PROP Intermediate_Dir "Debug"
# PROP Target_Dir ""
OUTDIR=.\\Debug
INTDIR=.\\Debug

ALL : "$(OUTDIR)\tpcc.dll"

CLEAN :
    -@erase "$(INTDIR)\diagio.obj"
    -@erase "$(INTDIR)\term.obj"
    -@erase "$(INTDIR)\timesupp.obj"
    -@erase "$(INTDIR)\tmon.obj"
    -@erase "$(INTDIR)\TPCC.OBJ"
    -@erase "$(INTDIR)\tpchandler.obj"
    -@erase "$(INTDIR)\vc40.idb"
    -@erase "$(INTDIR)\vc40.pdb"
    -@erase "$(OUTDIR)\tpcc.dll"
    -@erase "$(OUTDIR)\tpcc.exp"
    -@erase "$(OUTDIR)\tpcc.ilk"
    -@erase "$(OUTDIR)\tpcc.lib"
    -@erase "$(OUTDIR)\tpcc.pdb"

"$(OUTDIR)" :
    if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR)"

# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
# "_WINDOWS" /YX /c
# ADD CPP /nologo /MT /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
# "_WINDOWS" /YX /c
CPP_PROJ=/nologo /MT /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
# "_WINDOWS"
/Fp"$(INTDIR)\tpcc.pch" /YX /Fo"$(INTDIR)://" /Fd"$(INTDIR)://" /c
CPP_OBJS=.\\Debug/
CPP_SBRS=.\
# ADD BASE MTL /nologo /D "_DEBUG" /win32
# ADD MTL /nologo /D "_DEBUG" /win32
MTL_PROJ=/nologo /D "_DEBUG" /win32

# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$(OUTDIR)/tpcc.bsc"
BSC32_SBRS= \

LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbc32.lib /nologo /subsystem:windows /dll /debug
/machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib libtux.lib libbuft.lib libtux2.lib libfml.lib libfml32.lib
libgp.lib /nologo /subsystem:windows /dll /debug /machine:I386
# SUBTRACT LINK32 /verbose /nodefaultlib
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib\
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib\
odbc32.lib libtux.lib libbuft.lib libtux2.lib libfml.lib libfml32.lib\
libgp.lib /nologo /subsystem:windows /dll /incremental:yes\
/pdb:"$(OUTDIR)/tpcc.pdb" /debug /machine:I386 /def:".\\tpcc.def"\\
/out:"$(OUTDIR)/tpcc.dll" /implib:"$(OUTDIR)/tpcc.lib"
DEF_FILE= \
    ".\\tpcc.def"
LINK32_OBJS= \
    "$(INTDIR)\diagio.obj" \
    "$(INTDIR)\term.obj" \
    "$(INTDIR)\timesupp.obj" \
    "$(INTDIR)\tmon.obj" \
    "$(INTDIR)\TPCC.OBJ" \
    "$(INTDIR)\tpchandler.obj"

"$(OUTDIR)\tpcc.dll" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ENDIF

.c{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cxx{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.c{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cxx{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

#####
#####
```

```

# Begin Target
#
# Name "tpcc - Win32 Release"
# Name "tpcc - Win32 Debug"
#
!IF  "$(CFG)" == "tpcc - Win32 Release"
!
!ELSEIF  "$(CFG)" == "tpcc - Win32 Debug"
!
!ENDIF

#####
## Begin Source File
#
SOURCE=.\\term.c
DEP_CPP_TERM_=\
".\\diagio.h" \
".\\term.h" \
".\\timesupp.h" \
"$(INTDIR)\\term.obj" : $(SOURCE) $(DEP_CPP_TERM_) "$(INTDIR)"

## End Source File
#####
## Begin Source File
#
SOURCE=.\\timesupp.c
DEP_CPP_TIMES=\
".\\timesupp.h" \
"$(INTDIR)\\timesupp.obj" : $(SOURCE) $(DEP_CPP_TIMES) "$(INTDIR)"

## End Source File
#####
## Begin Source File
#
SOURCE=.\\TPCC.C
DEP_CPP_TPCC_=\
".\\diagio.h" \
".\\term.h" \
".\\tmon.h" \
".\\tpcc.h" \
".\\tpcchandler.h" \
"$(INTDIR)\\TPCC.OBJ" : $(SOURCE) $(DEP_CPP_TPCC_) "$(INTDIR)"

## End Source File
#####
## Begin Source File
#
SOURCE=.\\tpcchandler.c
DEP_CPP_TPCCH=\
".\\diagio.h" \
".\\term.h" \
".\\tmon.h" \
".\\tpcc.h" \
".\\tpcchandler.h" \
"$(INTDIR)\\tpcchandler.obj" : $(SOURCE) $(DEP_CPP_TPCCH) "$(INTDIR)"

## End Source File
#####
## End Target
## End Project
#####

```

## tpcc.def

```
EXPORTS
    GetExtensionVersion
    HttpExtensionProc
```

## tpcc.h

```
// tpcc.h

#include <time.h>

// TPCCHandler return codes
#define TPCCSEND 1
#define TPCCSENDEND 2
#define TPCCENDNOW 3

// TPCC Service return codes
#define SVC_BADITEMID 1
#define SVC_NOERROR 0
#define SVCERR_DEADLOCK -1
#define SVCERR_NOCUSTOMER -2
#define SVCERR_NOORDERS -3
#define SVCERR_DBLIB -4

// Min/Max transaction data definitions
#define MIN_DID 1
#define MAX_DID 10
#define MIN_OL 5
#define MAX_OL 15
#define MIN_QUANTITY 1
#define MAX_QUANTITY 10
#define MIN_ITEM_ID 1
#define MAX_ITEM_ID 100000
#define MIN_CUST_ID 1
#define MAX_CUST_ID 3000
#define MIN_CARRIER 1
#define MAX_CARRIER 10
#define MIN_THRESHOLD 10
#define MAX_THRESHOLD 20

// pTPCC->iStatusId codes
#define INVALID_IID 1
#define STATUS_OK 0
#define ERR_CMD_UNKNOWN -10
#define ERRTXT_CMD_UNKNOWN "Unrecognized Command"
#define ERR_ALREADY_LOGGEDIN -11
#define ERRTXT_ALREADY_LOGGEDIN "Already Logged In"
#define ERR_TERMID -12
#define ERRTXT_TERMID "TermId or SyncId in Error"
#define ERR_FORM_UNKNOWN -13
#define ERRTXT_FORM_UNKNOWN "Unrecognized FormId"
#define ERR_WID_INVALID -14
#define ERR_DID_INVALID -15
#define ERR_MISSING_KEY -16
#define ERR_NOT_NUMERIC -17
#define ERR_THRESHOLD_RANGE -18
#define ERR_EMBEDDED_EMPTY_OL -19
#define ERR_QUANTITY_INVALID -20
#define ERR_OI_INVALID -21
```

```
#define ERR_OI_COUNT -22
#define ERR_TM_INTERFACE -23
#define ERR_SERVICE_RSLT -24
#define ERR_INPUT_TOOLONG -25
#define ERR_IDANDNAME_EMPTY -26
#define ERR_IDANDNAME_ENTERED -27
#define ERR_AMOUNT_BADFORM -28
#define ERR_AMOUNT_INVALID -29
#define ERR_CARRIER_INVALID -30
#define ERR_TERM_ALLOC -31

#define STATUS_LEN 200
#define NAME_LEN 16
#define ADDR_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9

#define MAX_MSG_SZ 5000
#define CTEXT "Content-length: "
#define HTTPHdr "Connection: keep-alive\r\nContent-type: text/html\r\n" \
    "Content-length: \r\n\r\n"

typedef struct
{
    int year;
    int quarter;
    int month;
    int dayofyear;
    int day;
    int week;
    int weekday;
    int hour;
    int minute;
    int second;
    int millisecond;
} DBDATEREC;

typedef struct
{
    short ol_supply_w_id;
    long ol_i_id;
    char ol_i_name[25];
    short ol_quantity;
    char ol_brand_generic[2];
    double ol_i_price;
    double ol_amount;
    short ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    short o.ol_cnt;
    char c_last[NAME_LEN + 1];
    char c_credit[3];
    double c_discount;
    double w_tax;
    double d_tax;
    long o_id;
}
```

```

short o_commit_flag;
DBDATEREC o_entry_d;
short o_all_local;
double total_amount;
char execution_status[STATUS_LEN];
OL_NEW_ORDER_DATA ol[MAX_OL];
} NEW_ORDER_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    DBDATEREC h_date;
    char w_street_1[ADDR_LEN + 1];
    char w_street_2[ADDR_LEN + 1];
    char w_city[ADDR_LEN + 1];
    char w_state[STATE_LEN + 1];
    char w_zip[ZIP_LEN + 1];
    char d_street_1[ADDR_LEN + 1];
    char d_street_2[ADDR_LEN + 1];
    char d_city[ADDR_LEN + 1];
    char d_state[STATE_LEN + 1];
    char d_zip[ZIP_LEN + 1];
    char c_first[NAME_LEN + 1];
    char c_middle[3];
    char c_last[NAME_LEN + 1];
    char c_street_1[ADDR_LEN + 1];
    char c_street_2[ADDR_LEN + 1];
    char c_city[ADDR_LEN + 1];
    char c_state[STATE_LEN + 1];
    char c_zip[ZIP_LEN + 1];
    char c_phone[16];
    DBDATEREC c_since;
    char c_credit[3];
    double c_credit_lim;
    double c_discount;
    double c_balance;
    char c_data[200+1];
    char execution_status[STATUS_LEN];
} PAYMENT_DATA;

typedef struct
{
    long ol_i_id;
    short ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    DBDATEREC ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    char c_first[NAME_LEN + 1];
    char c_middle[3];
    char c_last[NAME_LEN + 1];
    double c_balance;
    long o_id;
    DBDATEREC o_entry_d;
    short o_carrier_id;
    OL_ORDER_STATUS_DATA olOrderStatusData[MAX_OL];
    short o.ol_cnt;
    char execution_status[STATUS_LEN];
} ORDER_STATUS_DATA;

typedef struct
{
    short w_id;
    short o_carrier_id;
    long o_id[10];
    int iComplete;
    SYSTEMTIME QTime;           // time delivery was queued
    SYSTEMTIME EndTime;         // time delivery completed
    char execution_status[STATUS_LEN];
} DELIVERY_DATA;

typedef struct
{
    short w_id;
    short d_id;
    short thresh_hold;
    long low_stock;
    char execution_status[STATUS_LEN];
} STOCK_LEVEL_DATA;

typedef struct
{
    LPVOID ConnID;             // Active Connection Id
    SHORT sWId;                // TPCC WareHouse Id
    SHORT sDId;                // TPCC District Id
    INT iSyncid;               // TPCC Sync Id
    INT iTermId;               // TPCC Term Id
    UINT uFormId;              // TPCC Form Id
    INT iStatusId;             // TPCC Status Id
    CHAR ErrTxt[500];           // Error text
    CHAR szWork[200];           // Thread work area
    CHAR szHeader[100];          // HTTP work area
    CHAR * RecvMsg;             // HTML message from ECB
    CHAR SendMsg[MAX_MSG_SZ];   // HTML work area
    TMON_STATE tsTMon;          // TMon Interface
} TPCC_STATE;
}

// tpcc.c
// Copyright Unisys, 1997
//
#include <windows.h>
#include <stdio.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <winreg.h>
#include <httpext.h>

```

```

#include "tmon.h"
#include "diagio.h"
#include "term.h"
#include "tpcchandler.h"

#define EXTN_VERSION MAKELONG(HSE_VERSION_MINOR,HSE_VERSION_MAJOR)
#define TLS_NULL 0xFFFFFFFF
DWORD dwTlsInx;
CHAR * pTitle = "IIS TPCC DLL";
CRITICAL_SECTION csDllMain;

// Diagnostic logging settings
BOOL bEventLog = TRUE;
BOOL bConsole = FALSE;
UINT uDiagLevel = DIAG_INFO;

// TMon Interface Settings
INT iTMMaxMsg = 0;

// Term Interface Settings
INT iMaxTerms = 3000;

static CHAR * szTPCCError =
HTTPHdr "<HTML>"
"<HEAD><TITLE>Welcome To TPC-C</TITLE></HEAD><BODY>"
"<B>TPCC Extension Error (TPCC Array Not Allocated)</B><BR>"
"</BODY></HTML>";

static CHAR * szTMInitError =
HTTPHdr "<HTML>"
"<HEAD><TITLE>Welcome To TPC-C</TITLE></HEAD><BODY>"
"<B>TPCC Extension Error (TMInit Failed)</B><BR>"
"</BODY></HTML>";
INT iHHdrLen = 0;
INT iCTextLen = 0;

BOOL ThreadAttach(TPCC_STATE * pTPCC,CHAR * pDiag);
VOID ThreadDetach(TPCC_STATE * pTPCC);
VOID SendResponse(EXTENSION_CONTROL_BLOCK * pECB,CHAR * pMsg,CHAR *
pWork);
BOOL ReadRegistry(VOID);

//=====
// Function name: DllMain
//=====
BOOL APIENTRY DllMain(HANDLE hInst, ULONG ul_reason_for_call,
                      LPVOID lpReserved)
{
    TPCC_STATE * pTPCC = NULL;
    CHAR szDiag[MAX_DIAG_SZ];
    UINT iTMMaxSz = 0;
    switch(ul_reason_for_call)
    {
        case DLL_PROCESS_ATTACH:
            // Process initialization
            InitializeCriticalSection(&csDllMain);
            ReadRegistry();
    }
}

```

```

DiagIoInit(pTitle,bConsole,bEventLog,uDiagLevel);
sprintf(szDiag,
        "EventLog = %d, Console = %d, DiagLevel = %d\n"
        "MaxTerms = %d\n",
        bEventLog,bConsole,uDiagLevel,iMaxTerms);
DiagIoWrite(szDiag,DIAG_FORCE);
dwTlsInx = TlsAlloc();
if (dwTlsInx == TLS_NULL)
{
    sprintf(szDiag,"PAttach(%ld): Tls Alloc Failed (%ld)\n",
            GetLastError());
    DiagIoWrite(szDiag,DIAG_ERROR);
    return(FALSE);
}
if (TermInit(iMaxTerms))
    return(FALSE);
iTMMaxSz = max(iTMMaxSz,sizeof(NEW_ORDER_DATA));
iTMMaxSz = max(iTMMaxSz,sizeof(PAYMENT_DATA));
iTMMaxSz = max(iTMMaxSz,sizeof(ORDER_STATUS_DATA));
iTMMaxSz = max(iTMMaxSz,sizeof(DELIVERY_DATA));
iTMMaxSz = max(iTMMaxSz,sizeof(STOCK_LEVEL_DATA));
iTMMaxSz += 10;
TMonInit(iTMMaxSz);
iHHdrLen = strlen(HTTPHdr);
iCTextLen = strlen(CTEXT);
break;
case DLL_THREAD_ATTACH:
    // Move ThreadAttach call to HttpExt since the DllMain call
    // for Thread Attach did not reliably come before the first
    // call to HttpExtProc.
    break;
    case DLL_THREAD_DETACH:
ThreadDetach(pTPCC);
    break;
    case DLL_PROCESS_DETACH:
ThreadDetach(pTPCC);
DeleteCriticalSection(&csDllMain);
TMonTerm();
TermTerm();
TlsFree(dwTlsInx);
dwTlsInx = TLS_NULL;
DiagIoTerm();
    break;
};

return TRUE;
}; // DllMain
//=====
// Function name: ThreadAttach
//=====
// Result:
//     FALSE Thread state structure initialized
//     TRUE Thread state structure initialization failure
//=====
BOOL ThreadAttach(TPCC_STATE * pTPCC,CHAR * pDiag)
{
    BOOL bRslt;
    UINT uLabelNoOp;
    EnterCriticalSection(&csDllMain);
}

```

```

try
{
    pTPCC = (TPCC_STATE *) calloc(1,sizeof(TPCC_STATE));
    if (pTPCC == NULL)
    {
        sprintf(pDiag,"ThrAtt(%ld): pTPCC Alloc Failed (%ld)\n",
                GetCurrentThreadId(),GetLastError());
        DiagIoWrite(pDiag,DIAG_ERROR);
        bRslt = TRUE;
        goto TAttachXit;
    };
    TlsSetValue(dwTlsInx,pTPCC);
    pTPCC->tsTMon.pTMDATA = NULL;
    pTPCC->tsTMon.pszErrTxt = pTPCC->ErrTxt;
    if (TMInit(&pTPCC->tsTMon))
    {
        sprintf(pDiag,"ThrAtt(%ld): TMInit %s\n",
                GetCurrentThreadId(),pTPCC->ErrTxt);
        DiagIoWrite(pDiag,DIAG_ERROR);
        bRslt = TRUE;
        goto TAttachXit;
    };
    bRslt = FALSE;
    TAttachXit:
        uLabelNoOp = 0;
    }
    finally
    {
        LeaveCriticalSection(&csDllMain);
    };
    return(bRslt);
}; // ThreadAttach
//=====
// Function name: ThreadDetach
//=====
VOID ThreadDetach(TPCC_STATE * pTPCC)
{
    EnterCriticalSection(&csDllMain);
    try
    {
        pTPCC = TlsGetValue(dwTlsInx);
        if (pTPCC != NULL)
        {
            TMDone(&pTPCC->tsTMon);
            free(pTPCC);
            pTPCC = NULL;
            TlsSetValue(dwTlsInx,pTPCC);
        };
    }
    finally
    {
        LeaveCriticalSection(&csDllMain);
    };
    // ThreadDetach
//=====

```

```

// Function name: GetExtensionVersion
//=====
BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO *pVersion)
{
    pVersion->dwExtensionVersion = EXTN_VERSION;
    strncpy(pVersion->lpszExtensionDesc,pTitle,HSE_MAX_EXT_DLL_NAME_LEN);
    return TRUE;
}; // GetExtensionVersion
//=====
// Function name: HttpExtensionProc
/////
// Returns:
//     HSE_STATUS_SUCCESS           send msg, drop connection
//     HSE_STATUS_SUCCESS_AND_KEEP_CONN   send msg, keep connection
/////
//=====
DWORD WINAPI HttpExtensionProc(EXTENSION_CONTROL_BLOCK * pECB)
{
    TPCC_STATE * pTPCC;
    DWORD dwRslt = HSE_STATUS_SUCCESS;
    UINT uRslt;

    pTPCC = TlsGetValue(dwTlsInx);
    if (pTPCC == NULL)
    {
        CHAR szWork[200];
        ThreadAttach(pTPCC,szWork);
        pTPCC = TlsGetValue(dwTlsInx);
        if (pTPCC == NULL)
        {
            SendResponse(pECB,szTPCCError,szWork);
            goto HttpXit;
        };
    };
    if (pTPCC->tsTMon.pTMDATA == NULL)
        SendResponse(pECB,szTMInitError,pTPCC->szHeader);
    TPCCClear(pTPCC);
    pTPCC->ConnID = pECB->ConnID;
    pTPCC->RecvMsg = pECB->lpszQueryString;
    uRslt = TPCCHandler(pTPCC);
    switch (uRslt)
    {
        case TPCCSEND:
            SendResponse(pECB,pTPCC->SendMsg,pTPCC->szHeader);
            dwRslt = HSE_STATUS_SUCCESS_AND_KEEP_CONN;
            break;
        case TPCCSENDEND:
            SendResponse(pECB,pTPCC->SendMsg,pTPCC->szHeader);
            break;
        case TPCCENDNOW:
        default:
            break;
    }; // switch (TPCCHandler result)
HttpXit:

```

```

        return(dwRslt);
    }; // HttpExtensionProc

//=====
// Function name: SendResponse
//=====
VOID SendResponse(EXTENSION_CONTROL_BLOCK * pECB, CHAR * pMsg, CHAR * pWork)
{
    DWORD dwMsgBytes;
    CHAR * pCL;
    dwMsgBytes = strlen(pMsg);
    pCL=strstr(pMsg,CTEXT);
    dwMsgBytes -= iHdrLen;
    sprintf(pWork,"%4ld",dwMsgBytes);
    pCL += iCTextLen;
    strncpy(pCL,pWork,4);
    (*pECB->ServerSupportFunction)
        (pECB->ConnID,
         HSE_REQ_SEND_RESPONSE_HEADER,
         NULL,
         &dwMsgBytes,
         (LPDWORD)pMsg);
}; // SendResponse

//=====
// Function name: ReadRegistry
// Sets global operational parameters from registry if they exist.
// Otherwise, compiled in defaults apply.
// Result:
// FALSE Registry entry found
// TRUE Registry entry does not exist
//=====
BOOL ReadRegistry(VOID)
{
    HKEY hkTPCC;
    DWORD dwMax;
    DWORD dwRT;
    INT i;
    CHAR szValue[100];
    if (RegOpenKeyEx(HKEY_LOCAL_MACHINE, "SOFTWARE\\Unisys\\TPCC", 0,
        KEY_READ, &hkTPCC) != ERROR_SUCCESS )
        return(TRUE);
    dwMax = sizeof(szValue);
    if (RegQueryValueEx(hkTPCC, "EVENTLOG", 0, &dwRT, szValue, &dwMax)
        == ERROR_SUCCESS)
    {
        if (abs(atoi(szValue)) == 0)
            bEventLog = FALSE;
        else
            bEventLog = TRUE;
    };
    dwMax = sizeof(szValue);
    if (RegQueryValueEx(hkTPCC, "CONSOLE", 0, &dwRT, szValue, &dwMax)
        == ERROR_SUCCESS )

```

```

    {
        if (abs(atoi(szValue)) == 0)
            bConsole = FALSE;
        else
            bConsole = TRUE;
    };
    dwMax = sizeof(szValue);
    if (RegQueryValueEx(hkTPCC, "DIAGLEVEL", 0, &dwRT, szValue, &dwMax)
        == ERROR_SUCCESS )
    {
        i = atoi(szValue);
        if (i < DIAG_FORCE)
            i = DIAG_FORCE;
        else
            if (i > DIAG_INFO)
                i = DIAG_INFO;
        uDiagLevel = i;
    };
    dwMax = sizeof(szValue);
    if (RegQueryValueEx(hkTPCC, "MAXTERMS", 0, &dwRT, szValue, &dwMax)
        == ERROR_SUCCESS )
    {
        iMaxTerms = abs(atoi(szValue));
    };
    RegCloseKey(hkTPCC);
    return(FALSE);
}; // ReadRegistry

```

## tpchandler.h

```

// tpcchandler.h
#include "tpcc.h"

BOOL TPCCClear(TPCC_STATE * pTPCC);
UINT TPCCHandler(TPCC_STATE * pTPCC);

```

## tpchandler.c

```

// tpcchandler.c
// Copyright Unisys, 1997
//
#include <windows.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

#include "tmon.h"
#include "diagio.h"
#include "tpchandler.h"
#include "term.h"

// pTPCC->iFormId - TPCC forms enumeration.
#define FORM_NULL          0
#define FORM_LOGON          1
#define FORM_MENU           2
#define FORM_NEWORDER       3

```

```

#define FORM_PAYMENT      4
#define FORM_DELIVERY     5
#define FORM_ORDERSTATUS   6
#define FORM_STOCKLEVEL    7
#define FORM_EXIT          8
#define FORM_MAX           9

// CMD= HTML Command Enumeration and Name
#define CMD_NULL          0
#define CMD_PROCESS        1
#define CMD_NEORDER_FORM   2
#define CMD_PAYMENT_FORM   3
#define CMD_DELIVERY_FORM  4
#define CMD_ORDERSTATUS_FORM 5
#define CMD_STOCKLEVEL_FORM 6
#define CMD_EXIT           7
#define CMD_SUBMIT          8
#define CMD_MENU_FORM       9
#define CMD_MAX             10

static CHAR * szCmds[] =
{
    "Unknown",
    "Process",
    "..NewOrder..",
    "..Payment..",
    "..Delivery..",
    "..Order-Status..",
    "..Stock-Level..",
    "..Exit..",
    "Submit",
    "Menu"
};

static CHAR * szFormLogin =
HTTPHdr "<HTML>
<HEAD><TITLE>Welcome To TPC-C</TITLE></HEAD><BODY>
Please Identify your Warehouse and District for this session.<BR>
<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">
<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">
<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"1\">
<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"-2\">
<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"0\">
Warehouse ID <INPUT NAME=\"w_id\" SIZE=4><BR>
District ID <INPUT NAME=\"d_id\" SIZE=2><BR>
<HR>
<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Submit\">
</FORM>";

static CHAR * szMenuList =
"<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">
<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Payment..\">
<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Delivery..\">
<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order-Status..\">
<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock-Level..\">
<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">";

static CHAR * HTMLTrailer =
"</BODY></HTML>";

static CHAR * TERMIDTOKEN = "TERMID=";

static CHAR * SYNCIDTOKEN = "SYNCID=";
static CHAR * FORMIDTOKEN = "FORMID=";
static CHAR * STATUSIDTOKEN = "STATUSID=";
static CHAR * CMDTOKEN = "CMD=";
static CHAR * NEWORDER_SERVICE = "NEWORDER";
static CHAR * PAYMENT_SERVICE = "PAYMENT";
static CHAR * ORDERSTATUS_SERVICE = "ORDERSTS";
static CHAR * DELIVERY_SERVICE = "DELIVERY";
static CHAR * STOCKLEVEL_SERVICE = "STOCKLVL";
static CHAR * ZIPPIC = "XXXXX-XXXX";

BOOL ProcessLogin(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC);
BOOL ProcessForm(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC);
BOOL ProcessNewOrder(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC);
BOOL ProcessPayment(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC);
BOOL ProcessDelivery(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC);
BOOL ProcessOrderStatus(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC);
BOOL ProcessStockLevel(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC);
VOID FormatLogin(CHAR * pMsg,CHAR * pAddText);
BOOL GetHidden(CHAR * pMsg,UINT * uFormId,INT * iSyncId,INT * iTermId);
BOOL GetCmd(CHAR * pMsg,CHAR * pWork,UINT uLen);
BOOL GetLongKey(LONG * lRslt,CHAR * pHTML,CHAR * pKey,TPCC_STATE * pTPCC);
BOOL GetIntKey(INT * iRslt,CHAR * pHTML,CHAR * pKey,TPCC_STATE * pTPCC);
BOOL GetShortKey(SHORT * sRslt,CHAR * pHTML,CHAR * pKey,TPCC_STATE * pTPCC);
BOOL GetStringKey(CHAR * szRslt,CHAR * pHTML,CHAR * pKey,
                  TPCC_STATE * pTPCC,UINT uMax);
BOOL GetAmountKey(DOUBLE * dRslt,CHAR * pHTML,CHAR * pKey,
                  TPCC_STATE * pTPCC);
BOOL GetKeyValue(CHAR * pHTML,CHAR * pKey,CHAR * pValue,UINT uMax);
VOID FormatLogin(CHAR * pOut,CHAR * pAddText);
VOID FormatMenu(CHAR * pOut,TPCC_STATE * pTPCC);
VOID FormatNewOrder(CHAR * pOut,TPCC_STATE * pTPCC);
VOID FormatPayment(CHAR * pOut,TPCC_STATE * pTPCC);
VOID FormatDelivery(CHAR * pOut,TPCC_STATE * pTPCC);
VOID FormatOrderStatus(CHAR * pOut,TPCC_STATE * pTPCC);
VOID FormatStockLevel(CHAR * pOut,TPCC_STATE * pTPCC);
VOID FormatFormHdr(CHAR * pOut,CHAR * pTitle,TPCC_STATE * pTPCC);
VOID FormatRespHdr(CHAR * pOut,CHAR * pTitle,TPCC_STATE * pTPCC);
VOID FormatHTMLString(CHAR * pOut,CHAR * pIn,UINT uLen);
VOID FormatString(CHAR * pOut,CHAR * pPic,CHAR * pIn);
VOID UtilStrCpy(CHAR * pDest,CHAR * pSrc,INT n);
BOOL CheckNumeric(CHAR * pNum);

//=====
// Function name: TPCCClear
//=====
BOOL TPCCClear(TPCC_STATE * pTPCC)
{
    pTPCC->ConnID = 0;
    pTPCC->sWId = 0;
    pTPCC->sDId = 0;
    pTPCC->iSyncId = 0;
    pTPCC->iTermId = -2;
    pTPCC->uFormId = FORM_NULL;
    pTPCC->iStatusId = 0;
    pTPCC->tsTMon.lTMDataLen = 0;
    strcpy(pTPCC->ErrTxt,"");
    return(FALSE);
}

```

```

}; // TPCCClear
//=====
// Function name: TPCCHandler
//=====
UINT TPCCHandler(TPCC_STATE * pTPCC)
{
    INT iSyncId;
    INT iTermId;
    UINT uCmdId;
    UINT uRslt = TPCCSENDEND; // default error handling
    TERM_STATE * pTerm;

    pTPCC->iStatusId = STATUS_OK;
    if (GetHidden(pTPCC->RecvMsg, &pTPCC->uFormId, &iSyncId, &iTermId))
    {
        uRslt = TPCCSEND;
        FormatLogin(pTPCC->SendMsg, pTPCC->ErrTxt);
        goto HdlrXit;
    };
    if (iTermId > 0)
    {
        pTerm = TermGet(iTermId);
        if (pTerm == NULL)
        {
            uRslt = TPCCSEND;
            strcpy(pTPCC->ErrTxt, "Invalid Term Id");
            FormatLogin(pTPCC->SendMsg, pTPCC->ErrTxt);
            goto HdlrXit;
        };
        if (pTerm->ConnID != pTPCC->ConnID)
        {
            uRslt = TPCCSEND;
            strcpy(pTPCC->ErrTxt, "TermId vs ConnId Mismatch");
            FormatLogin(pTPCC->SendMsg, pTPCC->ErrTxt);
            goto HdlrXit;
        };
        pTPCC->sWId = pTerm->sWId;
        pTPCC->sDId = pTerm->sDId;
        pTPCC->iSyncId = pTerm->iSyncId;
        pTPCC->iTermId = pTerm->iTermId;
    };
    uCmdId = GetCmd(pTPCC->RecvMsg, pTPCC->szWork, sizeof(pTPCC->szWork));
    // Except for Submit(log in), sWId must already be set
    if (pTPCC->sWId == 0 && uCmdId != CMD_SUBMIT)
    {
        strcpy(pTPCC->ErrTxt, "Must log in first!");
        FormatLogin(pTPCC->SendMsg, pTPCC->ErrTxt);
        uRslt = TPCCSEND;
        goto HdlrXit;
    };
    // Check for multiple log in attempts
    if (pTPCC->sWId != 0 && uCmdId == CMD_SUBMIT)
    {
        strcpy(pTPCC->ErrTxt, ERRTXT_ALREADY_LOGGEDIN);
        pTPCC->iStatusId = ERR_ALREADY_LOGGEDIN;
        FormatMenu(pTPCC->SendMsg, pTPCC);
        uRslt = TPCCSEND;
        goto HdlrXit;
    };
}

```

```

};

// If not logging in, validate hidden fields
if (uCmdId != CMD_SUBMIT)
{
    if (iTermId != pTPCC->iTermId || iTermId != iSyncId)
    {
        sprintf(pTPCC->ErrTxt, "%s: Received %ld, %ld (%ld)",
                ERRTXT_TERMID, iTermId, iSyncId, pTPCC->iTermId);
        pTPCC->iStatusId = ERR_TERMID;
        FormatMenu(pTPCC->SendMsg, pTPCC);
        goto HdlrXit;
    };
};

// Process the command
switch (uCmdId)
{
    case CMD_SUBMIT:
        ProcessLogin(pTPCC->RecvMsg, pTPCC->SendMsg, pTPCC);
        break;
    case CMD_MENU_FORM:
        FormatMenu(pTPCC->SendMsg, pTPCC);
        break;
    case CMD_PROCESS:
        ProcessForm(pTPCC->RecvMsg, pTPCC->SendMsg, pTPCC);
        break;
    case CMD_NEWORDER_FORM:
        FormatNewOrder(pTPCC->SendMsg, pTPCC);
        break;
    case CMD_PAYMENT_FORM:
        FormatPayment(pTPCC->SendMsg, pTPCC);
        break;
    case CMD_DELIVERY_FORM:
        FormatDelivery(pTPCC->SendMsg, pTPCC);
        break;
    case CMD_ORDERSTATUS_FORM:
        FormatOrderStatus(pTPCC->SendMsg, pTPCC);
        break;
    case CMD_STOCKLEVEL_FORM:
        FormatStockLevel(pTPCC->SendMsg, pTPCC);
        break;
    case CMD_EXIT:
        TermFree(pTPCC->iTermId);
        strcpy(pTPCC->ErrTxt, "Logged Off");
        FormatLogin(pTPCC->SendMsg, pTPCC->ErrTxt);
        goto HdlrXit;
    default:
        strcpy(pTPCC->ErrTxt, ERRTXT_CMD_UNKNOWN);
        pTPCC->iStatusId = ERR_CMD_UNKNOWN;
        if (pTPCC->sWId == 0)
            FormatLogin(pTPCC->SendMsg, pTPCC->ErrTxt);
        else
            FormatMenu(pTPCC->SendMsg, pTPCC);
        break;
};

// switch (uCmdId)

uRslt = TPCCSEND;

HdlrXit:

return(uRslt);

```

```

}; // TPCCHandler

//=====
// Function name: ProcessLogin
//
// ProcessLogin extracts WId and DId from the incoming form. Assumes
// log in has not previously completed (sWId == 0 already verified).
//
// Result:
//   FALSE - log in successful, sWId and sDId set in pTPCC,
//           pOut contains menu.
//   TRUE - log in failed, pOut contains log in form with
//           error message.
//=====

BOOL ProcessLogin(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    SHORT sWId;
    SHORT sDId;
    TERM_STATE * pTerm;

    if (GetShortKey(&sWId,pIn,"w_id",pTPCC))
    {
        FormatLogin(pOut,pTPCC->ErrTxt);
        return(TRUE);
    }
    if (sWId < 1)
    {
        sprintf(pTPCC->ErrTxt,"Warehouse Id (%d) Invalid",sWId);
        pTPCC->iStatusId = ERR_WID_INVALID;
        FormatLogin(pOut,pTPCC->ErrTxt);
        return(TRUE);
    }
    if (GetShortKey(&sDId,pIn,"d_id",pTPCC))
    {
        FormatLogin(pOut,pTPCC->ErrTxt);
        return(TRUE);
    }
    if (sDId < MIN_DId || sDId > MAX_DId)
    {
        sprintf(pTPCC->ErrTxt,"DId Out of Range(%ld,%ld) - %ld",
                MIN_DId,MAX_DId,sDId);
        pTPCC->iStatusId = ERR_DID_INVALID;
        FormatLogin(pOut,pTPCC->ErrTxt);
        return(TRUE);
    }
    pTerm = TermAlloc();
    if (pTerm == NULL)
    {
        sprintf(pTPCC->ErrTxt,"Unable to Allocate Terminal Entry");
        pTPCC->iStatusId = ERR_TERM_ALLOC;
        FormatLogin(pOut,pTPCC->ErrTxt);
        return(TRUE);
    }
    pTerm->ConnID = pTPCC->ConnID;
    pTerm->iSyncId = pTerm->iTermId;
    pTerm->sWId = abs(sWId);
    pTerm->sDId = abs(sDId);
    pTPCC->iTermId = pTerm->iTermId;
    pTPCC->iSyncId = pTerm->iSyncId;
}

```

```

pTPCC->sWId = pTerm->sWId;
pTPCC->sDId = pTerm->sDId;
FormatMenu(pOut,pTPCC);
return(FALSE);
} // ProcessLogin

//=====
// Function name: ProcessForm
//
// ProcessForm uses pTPCC->uFormId to determine which form input is
// present and ready for processing. Actual processing is done by
// the form specific routine.
//
// Result:
//   FALSE - form processed, pOut contains response.
//   TRUE - error processing form input, pOut contains reason.
//=====

BOOL ProcessForm(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    switch (pTPCC->uFormId )
    {
        case FORM_NEWORDER:
            return(ProcessNewOrder(pIn,pOut,pTPCC));
        case FORM_PAYMENT:
            return(ProcessPayment(pIn,pOut,pTPCC));
        case FORM_DELIVERY:
            return(ProcessDelivery(pIn,pOut,pTPCC));
        case FORM_ORDERSTATUS:
            return(ProcessOrderStatus(pIn,pOut,pTPCC));
        case FORM_STOCKLEVEL:
            return(ProcessStockLevel(pIn,pOut,pTPCC));
        default:
            sprintf(pTPCC->ErrTxt,"%s (%ld)",
                    ERRTXT_FORM_UNKNOWN,pTPCC->uFormId);
            pTPCC->iStatusId = ERR_FORM_UNKNOWN;
            FormatMenu(pOut,pTPCC);
            break;
    }
    return(TRUE);
} // ProcessForm

//=====
// Function name: ProcessNewOrder
//
// ProcessNewOrder extracts the input data fields from pIn, processes
// the data, and returns a response in pOut.
//
// Result:
//   FALSE - NewOrder processed successfully.
//   TRUE - NewOrder processing failed.
//=====

BOOL ProcessNewOrder(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    NEW_ORDER_DATA * pnod;
    TMON_STATE * pTMon;
    CHAR szKey[20];
    CHAR szCredit[14];
}

```

```

CHAR * ptr;
UINT u;
BOOL bDone = FALSE;
BOOL bTMRslt;
BOOL bTPRslt;
INT iTPRslt;

pTMon = &pTPCC->tsTMon;
pTMon->lTMDaLen = sizeof(NEW_ORDER_DATA);
memset(pTMon->pTMDa, 0, pTMon->lTMDaLen);
pnod = (NEW_ORDER_DATA *) pTMon->pTMDa;
pnod->w_id = pTPCC->sWId;
if (GetShortKey(&pnod->d_id, pIn, "DID*", pTPCC) )
{
    FormatMenu(pOut, pTPCC);
    return(TRUE);
}
if (pnod->d_id < MIN_DId || pnod->d_id > MAX_DId)
{
    sprintf(pTPCC->ErrTxt, "DId Out of Range(%ld,%ld) - %ld",
            MIN_DId,MAX_DId,pnod->d_id);
    pTPCC->iStatusId = ERR_DID_INVALID;
    FormatMenu(pOut, pTPCC);
    return(TRUE);
}
if (GetLongKey(&pnod->c_id, pIn, "CID*", pTPCC) )
{
    FormatMenu(pOut, pTPCC);
    return(TRUE);
}
pnod->o.ol_cnt = 0;
ptr = pIn;
for(u=0; u < MAX_OL; u++)
{
    sprintf(szKey,"SP%2.2d*",u);
    ptr = strstr(ptr,szKey);
    if (GetShortKey(&pnod->Ol[u].ol_supply_w_id,ptr,szKey,pTPCC) )
    {
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    }
    sprintf(szKey,"IID%2.2d*",u);
    if (GetLongKey(&pnod->Ol[u].ol_i_id,ptr,szKey,pTPCC) )
    {
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    }
    sprintf(szKey,"Qty%2.2d*",u);
    if (GetShortKey(&pnod->Ol[u].ol_quantity,ptr,szKey,pTPCC) )
    {
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    }
    if (pnod->Ol[u].ol_i_id != 0)
    {
        // Check for prior blank lines
        if (bDone)
        {
            strcat(pTPCC->ErrTxt,"Embedded Empty Order Lines");
            pTPCC->iStatusId = ERR_EMBEDDED_EMPTY_OL;
            FormatMenu(pOut, pTPCC);

```

```

            return(TRUE);
        }
        if (pnod->Ol[u].ol_supply_w_id < 1)
        {
            sprintf(pTPCC->ErrTxt,
                    "Order Line %ld Contains Invalid WId %d",
                    u,pnod->Ol[u].ol_supply_w_id);
            pTPCC->iStatusId = ERR_WID_INVALID;
            FormatMenu(pOut, pTPCC);
            return(TRUE);
        }
        if (pnod->Ol[u].ol_quantity < MIN_QUANTITY ||
            pnod->Ol[u].ol_quantity > MAX_QUANTITY)
        {
            sprintf(pTPCC->ErrTxt,
                    "Order Line %ld Contains Invalid Qty %d",
                    u,pnod->Ol[u].ol_quantity);
            pTPCC->iStatusId = ERR_QUANTITY_INVALID;
            FormatMenu(pOut, pTPCC);
            return(TRUE);
        }
        pnod->o.ol_cnt++;
    } // if (ol_i_id !=0)
else
{
    if (pnod->Ol[u].ol_supply_w_id != 0)
    {
        sprintf(pTPCC->ErrTxt,
                "Order Line %ld WId Supplied with No Item",u);
        pTPCC->iStatusId = ERR_Ol_INVALID;
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    }
    if (pnod->Ol[u].ol_quantity != 0)
    {
        sprintf(pTPCC->ErrTxt,
                "Order Line %ld Qty Supplied with No Item",u);
        pTPCC->iStatusId = ERR_Ol_INVALID;
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    }
    bDone = TRUE;
} // empty order line
} // for (u < MAX_OL)

if (pnod->o.ol_cnt < MIN_OL)
{
    sprintf(pTPCC->ErrTxt, "Too Few Order Lines %d",pnod->o.ol_cnt);
    pTPCC->iStatusId = ERR_Ol_COUNT;
    FormatMenu(pOut, pTPCC);
    return(TRUE);
}
bTMRslt = TMTran(NEWORDER_SERVICE,pTMon,&bTPRslt,&iTPRslt);
pnod = (NEW_ORDER_DATA *) pTMon->pTMDa;
if (bTMRslt)
{
    pTPCC->iStatusId = ERR_TM_INTERFACE;
    FormatMenu(pOut, pTPCC);
    return(TRUE);
}
// Exclude invalid item id case

```

```

if (bTPRslt && iTPRslt < SVC_NOERROR)
{
    sprintf(pTPCC->ErrTxt,
        "New Order Service Returned Error(%ld): %s",
        iTPRslt,pnod->execution_status);
    pTPCC->iStatusId = ERR_SERVICE_RSLT;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
};

if (iTPRslt == SVC_BADITEMID)
    pTPCC->iStatusId = INVALID_IID;

FormatRespHdr(pOut,"TPC-C New Order",pTPCC);
sprintf(pOut + strlen(pOut),
    "<PRE>                                         New Order<BR>",
    "Warehouse: %4.4d   District: %2.2d           ",
    pnod->w_id,pnod->d_id);
if (!bTPRslt)
{
    sprintf(pOut + strlen(pOut),
        "Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d <BR>",
        pnod->o_entry_d.day,pnod->o_entry_d.month,
        pnod->o_entry_d.year,pnod->o_entry_d.hour,
        pnod->o_entry_d.minute,pnod->o_entry_d.second);
}
else
{
    sprintf(pOut + strlen(pOut), "Date:<BR>");
};

FormatHTMLString(pTPCC->szWork,pnod->c_last,NAME_LEN);
FormatHTMLString(szCredit,pnod->c_credit,2);
sprintf(pOut + strlen(pOut),
    "Customer: %4.4d Name: %s Credit: %s   ",
    pnod->c_id,pTPCC->szWork,szCredit);
if (!bTPRslt)
{
    sprintf(pOut + strlen(pOut),
        "%Disc: %5.2f             <BR>",pnod->c_discount * 100);
    sprintf(pOut + strlen(pOut),
        "Order Number: %8.8d Number of Lines: %2.2d      W_tax: %5.2f
D_tax: %5.2f <BR><BR>",
        pnod->o_id,pnod->o.ol_cnt,pnod->w_tax * 100,pnod->d_tax * 100);
    strcat(pOut," Supp_W Item_Id  Item Name          Qty Stock
B/G Price   Amount<BR>");

    for (u = 0; u < (UINT) pnod->o.ol_cnt; u++)
    {
        FormatHTMLString(pTPCC->szWork,pnod->Ol[u].ol_i_name,24);
        sprintf(pOut + strlen(pOut),
            " %4.4d %6.6d %s %2.2d %3.3d %1.1s $%6.2f
$%7.2f <BR>",
            pnod->Ol[u].ol_supply_w_id,pnod->Ol[u].ol_i_id,
            pTPCC->szWork,pnod->Ol[u].ol_quantity,pnod->Ol[u].ol_stock,
            pnod->Ol[u].ol_brand_generic,pnod->Ol[u].ol_i_price,
            pnod->Ol[u].ol_amount );
    }
} // if (!bTPRslt)
else
{
    strcat(pOut,"%Disc:<BR>");
    sprintf(pOut + strlen(pOut),

```

```

        "Order Number: %8.8d Number of Lines: %2.2d      W_tax: %5.2f
D_tax:<BR><BR>",
        pnod->o.id);
    strcat(pOut,
        " Supp_W Item_Id  Item Name          Qty Stock
Price   Amount<BR>"); u = 0;
};

for(; u < MAX_OL; u++)
    strcat(pOut,<BR>);
if (!bTPRslt)
{
    sprintf(pOut + strlen(pOut),
        "Execution Status: %24.24s           Total: $%8.2f  ",
        pnod->execution_status,pnod->total_amount);
}
else
{
    sprintf(pOut + strlen(pOut),
        "Execution Status: %24.24s           Total:",
        pnod->execution_status);
};
sprintf(pOut + strlen(pOut),
    "</PRE><HR><BR>%s</FORM>%s",szMenuList,HTMLTrailer);

return(FALSE);
};

// ProcessNewOrder
=====//
// Function name: ProcessPayment
// ProcessPayment extracts the input data fields from pIn, processes
// the data, and returns a response in pOut.
//
// Result:
//     FALSE - Payment processed successfully.
//     TRUE - Payment processing failed.
//
=====BOOL ProcessPayment(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    PAYMENT_DATA * ppd;
    TMON_STATE * pTMon;
    BOOL bTMRslt;
    BOOL bTPRslt;
    INT iTPRslt;
    CHAR * pCredit;
    INT iCDLines;
    CHAR szWork2[60];
    CHAR szWork3[60];
    CHAR szWork4[60];
    CHAR szZip1[20];
    CHAR szZip2[20];
    INT i;

    pTMon = &pTPCC->tsTMon;
    pTMon->lTMDataLen = sizeof(PAYMENT_DATA);
    memset(pTMon->pTMDData,0,pTMon->lTMDataLen);
    ppd = (PAYMENT_DATA *) pTMon->pTMDData;
```

```

ppd->w_id = pTPCC->sWId;
// Get and validate DId
if (GetShortKey(&ppd->d_id,pIn,"DID*",pTPCC) )
{
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
if (ppd->d_id < MIN_DId || ppd->d_id > MAX_DId)
{
    sprintf(pTPCC->ErrTxt,"DId Out of Range(%ld,%ld) - %ld",
        MIN_DId,MAX_DId,ppd->d_id);
    pTPCC->iStatusId = ERR_DID_INVALID;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
// Get and validate customer Id and name
if (GetLongKey(&ppd->c_id,pIn,"CID*",pTPCC) )
{
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
if (GetStringKey(ppd->c_last,pIn,"CLT*",pTPCC,NAME_LEN) )
{
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
if (ppd->c_id == 0 && ppd->c_last[0] == 0)
{
    strcpy(pTPCC->ErrTxt,"Error - Customer Id and Name Empty");
    pTPCC->iStatusId = ERR_IDANDNAME_EMPTY;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
if (ppd->c_id != 0 && ppd->c_last[0] != 0)
{
    strcpy(pTPCC->ErrTxt,
        "Error - Specify Customer Id or Name, not Both");
    pTPCC->iStatusId = ERR_IDANDNAME_ENTERED;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
// Get and validate customer DId
if (GetShortKey(&ppd->c_d_id,pIn,"CDI*",pTPCC) )
{
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
if (ppd->c_d_id < MIN_DId || ppd->c_d_id > MAX_DId)
{
    sprintf(pTPCC->ErrTxt,"Cust DId Out of Range(%ld,%ld) - %ld",
        MIN_DId,MAX_DId,ppd->d_id);
    pTPCC->iStatusId = ERR_DID_INVALID;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
// Get and validate customer WId
if (GetShortKey(&ppd->c_w_id,pIn,"CWI*",pTPCC) )
{
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}

```

```

if (ppd->c_w_id < 1)
{
    sprintf(pTPCC->ErrTxt,
        "Payment Contains Invalid Customer WId %d",
        ppd->c_w_id);
    pTPCC->iStatusId = ERR_WID_INVALID;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
// Get and validate amount
if (GetAmountKey(&ppd->h_amount,pIn,"HAM*",pTPCC) )
{
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
if (ppd->h_amount <= 0)
{
    sprintf(pTPCC->ErrTxt,
        "Payment Amount Negative or Missing");
    pTPCC->iStatusId = ERR_AMOUNT_INVALID;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
bTMRslt = TMTran(PAYMENT_SERVICE,pTMon,&bTMRslt,&iTPRslt);
ppd = (PAYMENT_DATA *) pTMon->pTMDATA;
if (bTMRslt)
{
    pTPCC->iStatusId = ERR_TM_INTERFACE;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
if (bTPRslt)
{
    sprintf(pTPCC->ErrTxt,
        "Payment Service Returned Error(%ld): %s",
        iTPRslt,ppd->execution_status);
    pTPCC->iStatusId = ERR_SERVICE_RSLT;
    FormatMenu(pOut,pTPCC);
    return(TRUE);
}
FormatRespHdr(pOut,"TPC-C Payment",pTPCC);
sprintf(pOut + strlen(pOut),
        "<PRE>                                         Payment<BR>"
        "Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d <BR><BR>"
        "Warehouse: %4.4d"
        "                                         District: %2.2d<BR>",
        ppd->h_date.day,ppd->h_date.month,
        ppd->h_date.year,ppd->h_date.hour,
        ppd->h_date.minute,ppd->h_date.second,
        ppd->w_id,ppd->d_id);

FormatHTMLString(szWork2,ppd->w_street_1,ADDR_LEN);
FormatHTMLString(szWork3,ppd->d_street_1,ADDR_LEN);
sprintf(pOut + strlen(pOut),
        "%s                                         %s<BR>",szWork2,szWork3);
FormatHTMLString(szWork2,ppd->w_street_2,ADDR_LEN);
FormatHTMLString(szWork3,ppd->d_street_2,ADDR_LEN);
sprintf(pOut + strlen(pOut),
        "%s                                         %s<BR>",szWork2,szWork3);
FormatHTMLString(pTPCC->szWork,ppd->w_city,ADDR_LEN);
FormatHTMLString(szWork2,ppd->d_city,ADDR_LEN);

```

```

FormatHTMLString(szWork3,ppd->w_state,STATE_LEN);
FormatHTMLString(szWork4,ppd->d_state,STATE_LEN);
FormatString(szZip1,ZIPPIC,ppd->w_zip);
FormatString(szZip2,ZIPPIC,ppd->d_zip);
sprintf(pOut + strlen(pOut),
    "%s %s %10.10s      %s %s %10.10s<BR><BR>",
    pTPCC->szWork,szWork3,szZip1,szWork2,szWork4,szZip2);
FormatHTMLString(szWork2,ppd->c_first,NAME_LEN);
FormatHTMLString(szWork3,ppd->c_middle,2);
FormatHTMLString(szWork4,ppd->c_last,NAME_LEN);
sprintf(pOut + strlen(pOut),
    "Customer: %4.4d Cust-Warehouse: %4.4d Cust-District: %2.2d<BR>"
    "Name: %s %s %s Since: %2.2d-%2.2d-%4.4d<BR>",
    ppd->c_id,ppd->c_w_id,ppd->c_d_id,
    szWork2,szWork3,szWork4,
    ppd->c_since.day,ppd->c_since.month,ppd->c_since.year);
FormatHTMLString(pTPCC->szWork,ppd->c_street_1,ADDR_LEN);
FormatHTMLString(szWork2,ppd->c_credit,2);
FormatHTMLString(szWork3,ppd->d_street_2,ADDR_LEN);
sprintf(pOut + strlen(pOut),
    "          %s                  Credit: %s<BR>%s",
    "          %s                  %%Disc: %5.2f<BR>",
    pTPCC->szWork,szWork2,szWork3,ppd->c_discount * 100);
FormatHTMLString(szWork2,ppd->c_city,ADDR_LEN);
FormatHTMLString(szWork3,ppd->c_state,STATE_LEN);
FormatString(szZip1,ZIPPIC,ppd->c_zip);
FormatString(szWork4,"XXXXXX-XXX-XXX-XXXX",ppd->c_phone);
sprintf(pOut + strlen(pOut),
    "          %s %s %10.10s      Phone: %19.19s<BR><BR>",
    "Amount Paid:      $%7.2f      New Cust Balance: $%14.2f<BR>%s",
    "Credit Limit:    $%13.2f<BR><BR>",
    szWork2,szWork3,szZip1,szWork4,
    ppd->h_amount,ppd->c_balance,ppd->c_credit_lim);
pCredit = ppd->c_credit;
if (*pCredit == 'B' && *(pCredit + 1) == 'C')
{
    pCredit = ppd->c_data;
    iCDLINES = strlen(pCredit) / 50;
    for(i = 0; i < 4; i++, pCredit += 50)
    {
        if (i <= iCDLINES)
            UtilStrCpy(szWork2,pCredit,50);
        else
            szWork2[0] = 0;
        FormatHTMLString(szWork3,szWork2,50);
        if (!i)
            sprintf(pOut + strlen(pOut),
                "Cust-Data: %s<BR>",szWork3);
        else
            sprintf(pOut + strlen(pOut),
                "          %s<BR>",szWork3);
    }
}
else
    strcat(pOut,"Cust-Data: <BR><BR><BR><BR>");
sprintf(pOut + strlen(pOut),
    "</PRE><HR>%s</FORM>%s",szMenuList,HTMLTrailer);

return(FALSE);
}; // ProcessPayment

```

```

//=====
// Function name: ProcessDelivery
//
//     ProcessDelivery extracts the input data fields from pIn, processes
//     the data, and returns a response in pOut.
//
// Result:
//     FALSE - Delivery processed successfully.
//     TRUE - Delivery processing failed.
//
//=====
BOOL ProcessDelivery(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    DELIVERY_DATA * pdd;
    TMON_STATE * pTMon;
    BOOL bTMRslt;

    pTMon = &pTPCC->tsTMon;
    pTMon->lTMDataLen = sizeof(DELIVERY_DATA);
    memset(pTMon->pTMData,0,pTMon->lTMDataLen);
    pdd = (DELIVERY_DATA *) pTMon->pTMData;
    pdd->w_id = pTPCC->sWid;
    // Get and validate carrier id
    if (GetShortKey(&pdd->o_carrier_id,pIn,"OCD*",pTPCC))
    {
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (pdd->o_carrier_id < MIN_CARRIER ||
        pdd->o_carrier_id > MAX_CARRIER)
    {
        sprintf(pTPCC->ErrTxt,"Carrier Id Out of Range(%ld,%ld) - %ld",
                MIN_CARRIER,MAX_CARRIER,pdd->o_carrier_id);
        pTPCC->iStatusId = ERR_CARRIER_INVALID;
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    GetLocalTime(&pdd->QTime);
    bTMRslt = TMPost(DELIVERY_SERVICE,pTMon);
    if (bTMRslt)
    {
        pTPCC->iStatusId = ERR_TM_INTERFACE;
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    strcpy(pdd->execution_status,"Delivery has been queued.");
    FormatRespHdr(pOut,"TPC-C Delivery",pTPCC);
    sprintf(pOut + strlen(pOut),
        "<PRE>                                         Delivery<BR>%s",
        "Warehouse: %4.4d<BR><BR>%s",
        "Carrier Number: %2.2d<BR><BR>%s",
        "Execution Status: %25.25s<BR>%s",
        pdd->w_id,pdd->o_carrier_id,pdd->execution_status);
    sprintf(pOut + strlen(pOut),
        "</PRE><HR>%s</FORM>%s",szMenuList,HTMLTrailer);

    return(FALSE);
}; // ProcessDelivery

```

```

//=====
// Function name: ProcessOrderStatus
//
// ProcessOrderStatus extracts the input data fields from pIn,
// processes the data, and returns a response in pOut.
//
// Result:
//   FALSE - OrderStatus processed successfully.
//   TRUE - OrderStatus processing failed.
//=====
BOOL ProcessOrderStatus(CHAR * pIn,CHAR * pOut,TPCC_STATE * pTPCC)
{
    ORDER_STATUS_DATA * posd;
    TMON_STATE * pTMon;
    INT i;
    CHAR szWork2[50];
    CHAR szWork3[50];
    BOOL bTMRslt;
    BOOL bTPRslt;
    INT iTPRslt;

    pTMon = &pTPCC->tsTMon;
    pTMon->lTMDaLen = sizeof(ORDER_STATUS_DATA);
    memset(pTMon->pTMDa,0,pTMon->lTMDaLen);
    posd = (ORDER_STATUS_DATA *) pTMon->pTMDa;
    posd->w_id = pTPCC->sWId;
    if (GetShortKey(&posd->d_id,pIn,"DID*",pTPCC))
    {
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (posd->d_id < MIN_DId || posd->d_id > MAX_DId)
    {
        sprintf(pTPCC->ErrTxt,"DId Out of Range(%ld,%ld) - %ld",
            MIN_DId,MAX_DId,posd->d_id);
        pTPCC->iStatusId = ERR_DID_INVALID;
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (GetLongKey(&posd->c_id,pIn,"CID*",pTPCC))
    {
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (GetStringKey(posd->c_last,pIn,"CLT*",pTPCC,NAME_LEN))
    {
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (posd->c_id == 0 && posd->c_last[0] == 0)
    {
        strcpy(pTPCC->ErrTxt,"Error - Customer Id and Name Empty");
        pTPCC->iStatusId = ERR_IDANDNAME_EMPTY;
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (posd->c_id != 0 && posd->c_last[0] != 0)
    {

```

```

        strcpy(pTPCC->ErrTxt,
            "Error - Specify Customer Id or Name, not Both");
        pTPCC->iStatusId = ERR_IDANDNAME_ENTERED;
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    bTMRslt = TMTran(ORDERSTATUS_SERVICE,pTMon,&bTPRslt,&iTPRslt);
    posd = (ORDER_STATUS_DATA *) pTMon->pTMDa;
    if (bTMRslt)
    {
        pTPCC->iStatusId = ERR_TM_INTERFACE;
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    if (bTPRslt)
    {
        sprintf(pTPCC->ErrTxt,
            "Order Status Service Returned Error(%ld): %s",
            iTPRslt, posd->execution_status);
        pTPCC->iStatusId = ERR_SERVICE_RSLT;
        FormatMenu(pOut,pTPCC);
        return(TRUE);
    };
    FormatRespHdr(pOut,"TPC-C Order-Status",pTPCC);
    sprintf(pOut + strlen(pOut),
        "<PRE>                                         Order-Status<BR>"
        "Warehouse: %4.4d District: %2.2d<BR>",
        posd->w_id, posd->d_id);
    FormatHTMLString(pTPCC->szWork, posd->c_first, NAME_LEN);
    FormatHTMLString(szWork2, posd->c_middle, 2);
    FormatHTMLString(szWork3, posd->c_last, NAME_LEN);
    sprintf(pOut + strlen(pOut),
        "Customer: %4.4d Name: %s %s %s<BR>"
        "Cust-Balance: $%9.2f<BR><BR>",
        posd->c_id, pTPCC->szWork, szWork2, szWork3, posd->c_balance);
    sprintf(pOut + strlen(pOut),
        "Order-Number: %8.8d Entry-Date: %2.2d-%2.2d-%4.4d
%2.2d:%2.2d:%2.2d Carrier-Number: %2.2d<BR>"
        "Supply-W Item-Id Qty Amount Delivery-Date<BR>",
        posd->o_id, posd->o_entry_d.day, posd->o_entry_d.month,
        posd->o_entry_d.year, posd->o_entry_d.hour,
        posd->o_entry_d.minute, posd->o_entry_d.second,
        posd->o_carrier_id);
    for(i = 0; i < posd->o.ol_cnt; i++)
    {
        sprintf(pOut + strlen(pOut),
            " %4.4d      %6.6d      %2.2d      %%8.2f      %2.2d-%2.2d-
%4.4d<BR>",
            posd->oOlOrderStatusData[i].ol_supply_w_id,
            posd->oOlOrderStatusData[i].ol_i_id,
            posd->oOlOrderStatusData[i].ol_quantity,
            posd->oOlOrderStatusData[i].ol_amount,
            posd->oOlOrderStatusData[i].ol_delivery_d.day,
            posd->oOlOrderStatusData[i].ol_delivery_d.month,
            posd->oOlOrderStatusData[i].ol_delivery_d.year);
    };
    sprintf(pOut + strlen(pOut),
        "<BR></PRE><HR><BR>%s</FORM>%s", szMenuList, HTMLTrailer);
    return(FALSE);
}

```

```

}; // ProcessOrderStatus

//=====
// Function name: ProcessStockLevel
//
// ProcessStockLevel extracts the input data fields from pIn,
// processes the data, and returns a response in pOut.
//
// Result:
//   FALSE - StockLevel processed successfully.
//   TRUE - StockLevel processing failed.
//
//=====

BOOL ProcessStockLevel(CHAR * pIn, CHAR * pOut, TPCC_STATE * pTPCC)
{
    STOCK_LEVEL_DATA * psld;
    TMON_STATE * pTMon;
    BOOL bTMRslt;
    BOOL bTPRslt;
    INT iTPRslt;

    pTMon = &pTPCC->tsTMon;
    pTMon->lTMDataLen = sizeof(STOCK_LEVEL_DATA);
    memset(pTMon->pTMDData, 0, pTMon->lTMDataLen);
    psld = (STOCK_LEVEL_DATA *) pTMon->pTMDData;
    psld->w_id = pTPCC->sWId;
    psld->d_id = pTPCC->sDId;
    psld->low_stock = 0;
    psld->execution_status[0] = 0;
    if (GetShortKey(&psld->thresh_hold, pIn, "TT*", pTPCC))
    {
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    }
    if (psld->thresh_hold < MIN_THRESHOLD ||
        psld->thresh_hold > MAX_THRESHOLD)
    {
        sprintf(pTPCC->ErrTxt, "Threshold Out of Range(%ld,%ld) - %ld",
                MIN_THRESHOLD, MAX_THRESHOLD, psld->thresh_hold);
        pTPCC->iStatusId = ERR_THRESHOLD_RANGE;
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    }

    bTMRslt = TMTran(STOCKLEVEL_SERVICE, pTMon, &bTPRslt, &iTPRslt);
    psld = (STOCK_LEVEL_DATA *) pTMon->pTMDData;
    if (bTMRslt)
    {
        pTPCC->iStatusId = ERR_TM_INTERFACE;
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    }
    if (bTPRslt)
    {
        sprintf(pTPCC->ErrTxt,
                "Stock Level Service Returned Error(%ld): %s",
                iTPRslt, psld->execution_status);
        pTPCC->iStatusId = ERR_SERVICE_RSLT;
        FormatMenu(pOut, pTPCC);
        return(TRUE);
    }
}

```

```

};

FormatRespHdr(pOut, "TPC-C Stock Level", pTPCC);
sprintf(pOut + strlen(pOut),
        "Stock-Level<BR>" Stock-Level<BR>
        "Warehouse: %4.4d District: %2.2d<BR><BR>" Stock-Level<BR>
        "Stock Level Threshold: %2.2d<BR><BR>" Stock-Level<BR>
        "low stock: %3.3ld</PRE><BR><HR>%s</FORM>%s",
        pTPCC->sWId, pTPCC->sDId, psld->thresh_hold, psld->low_stock,
        szMenuList, HTMLTrailer);

return(FALSE);

}; // ProcessStockLevel

//=====
// Function name: GetHidden
//
//=====

BOOL GetHidden(CHAR * pMsg, UINT * uFormId, INT * iSyncId, INT * iTermId)
{
    CHAR * pPtr;
    BOOL bRslt = TRUE;

    // Extract TERMID
    pPtr = strstr(pMsg, TERMIDTOKEN);
    if (pPtr == NULL)
        goto xit;
    pPtr += strlen(TERMIDTOKEN);
    *iTermId = atoi(pPtr);

    // Extract SYNCID
    pPtr = strstr(pMsg, SYNCIDTOKEN);
    if (pPtr == NULL)
        goto xit;
    pPtr += strlen(SYNCIDTOKEN);
    *iSyncId = atoi(pPtr);

    // Extract FORMID
    pPtr = strstr(pMsg, FORMIDTOKEN);
    if (pPtr == NULL)
        goto xit;
    pPtr += strlen(FORMIDTOKEN);
    *uFormId = abs(atoi(pPtr));

    bRslt = FALSE;

xit:
    return(bRslt);

}; // GetHidden

//=====
// Function name: GetCmd
//
//=====

BOOL GetCmd(CHAR * pMsg, CHAR * pWork, UINT uLen)

```

```

{
    UINT u;
    CHAR * ptr;
    CHAR * pUpd;

    // Check for CMD key
    if (!(ptr = strstr(pMsg, CMDTOKEN)))
        return(CMD_NULL);
    ptr += sizeof(CMDTOKEN);
    pUpd = pWork;
    while (*ptr && *ptr != '&')
        *pUpd++ = *ptr++;
    *pUpd = 0;

    // Convert command name into command index
    for(u=0; u < CMD_MAX; u++)
    {
        if (!strcmp(szCmds[u], pWork))
            return(u);
    }

    // Command string not found
    return(CMD_NULL);
};

// GetCmd
//=====================================================================
// Function name: GetLongKey
//=====================================================================
BOOL GetLongKey(LONG * lRslt, CHAR * pHTML, CHAR * pKey, TPCC_STATE * pTPCC)
{
    if (GetKeyValue(pHTML, pKey, pTPCC->szWork, sizeof(pTPCC->szWork)))
    {
        sprintf(pTPCC->ErrTxt, "Error - Missing %s Key", pKey);
        pTPCC->iStatusId = ERR_MISSING_KEY;
        return(TRUE);
    }
    if (pTPCC->szWork[0] != 0)
    {
        if (CheckNumeric(pTPCC->szWork))
        {
            sprintf(pTPCC->ErrTxt, "Error - %s Value Not Numeric", pKey);
            pTPCC->iStatusId = ERR_NOT_NUMERIC;
            return(TRUE);
        }
        *lRslt = atol(pTPCC->szWork);
        return(FALSE);
    };
    // GetLongKey
}

// Function name: GetIntKey
//=====================================================================
BOOL GetIntKey(INT * iRslt, CHAR * pHTML, CHAR * pKey, TPCC_STATE * pTPCC)
{
    if (GetKeyValue(pHTML, pKey, pTPCC->szWork, sizeof(pTPCC->szWork)))
    {
        sprintf(pTPCC->ErrTxt, "Error - Missing %s Key", pKey);
        pTPCC->iStatusId = ERR_MISSING_KEY;
        return(TRUE);
    };
    if (pTPCC->szWork[0] != 0)
    {
        if (CheckNumeric(pTPCC->szWork))
        {
            sprintf(pTPCC->ErrTxt, "Error - %s Value Not Numeric", pKey);
            pTPCC->iStatusId = ERR_NOT_NUMERIC;
            return(TRUE);
        };
        *iRslt = atoi(pTPCC->szWork);
        return(FALSE);
    };
    // GetIntKey
}

// Function name: GetShortKey
//=====================================================================
BOOL GetShortKey(SHORT * sRslt, CHAR * pHTML, CHAR * pKey, TPCC_STATE * pTPCC)
{
    if (GetKeyValue(pHTML, pKey, pTPCC->szWork, sizeof(pTPCC->szWork)))
    {
        sprintf(pTPCC->ErrTxt, "Error - Missing %s Key", pKey);
        pTPCC->iStatusId = ERR_MISSING_KEY;
        return(TRUE);
    };
    if (pTPCC->szWork[0] != 0)
    {
        if (CheckNumeric(pTPCC->szWork))
        {
            sprintf(pTPCC->ErrTxt, "Error - %s Value Not Numeric", pKey);
            pTPCC->iStatusId = ERR_NOT_NUMERIC;
            return(TRUE);
        };
        *sRslt = (SHORT) atoi(pTPCC->szWork);
        return(FALSE);
    };
    // GetShortKey
}

// Function name: GetStringKey
//=====================================================================
BOOL GetStringKey(CHAR * szRslt, CHAR * pHTML, CHAR * pKey,
                  TPCC_STATE * pTPCC, UINT uMax)
{
    UINT uLen;
    if (GetKeyValue(pHTML, pKey, pTPCC->szWork, sizeof(pTPCC->szWork)))
    {
        sprintf(pTPCC->ErrTxt, "Error - Missing %s Key", pKey);
        pTPCC->iStatusId = ERR_MISSING_KEY;
        return(TRUE);
    };
    uLen = strlen(pTPCC->szWork);
    if (uLen > uMax)

```

```

{
    sprintf(pTPCC->ErrTxt,
        "Error - %s Key Input (%ld) Too Long (%ld)"
        ,pKey,uLen,uMax);
    pTPCC->iStatusId = ERR_INPUT_TOOLONG;
    return(TRUE);
};

_strdup(pTPCC->szWork);
strcpy(szRslt,pTPCC->szWork);
return(FALSE);
} // GetStringKey
=====
// Function name: GetAmountKey
//
=====
BOOL GetAmountKey(DOUBLE * dRslt,CHAR * pHTML,CHAR * pKey,
                  TPCC_STATE * pTPCC)
{
    CHAR * ptr;
    BOOL bInvalid = FALSE;

    if (GetKeyValue(pHTML,pKey,pTPCC->szWork,sizeof(pTPCC->szWork)))
    {
        sprintf(pTPCC->ErrTxt,"Error - Missing %s Key",pKey);
        pTPCC->iStatusId = ERR_MISSING_KEY;
        return(TRUE);
    };
    ptr = pTPCC->szWork;
    while(*ptr)
    {
        if (*ptr == '.')
        {
            ptr++;
            if (!*ptr)
                break;
            if (*ptr < '0' || *ptr > '9')
            {
                bInvalid = TRUE;
                break;
            };
            ptr++;
            if (!*ptr)
                break;
            if (*ptr < '0' || *ptr > '9')
            {
                bInvalid = TRUE;
                break;
            };
            ptr++;
            if (*ptr)
            {
                bInvalid = TRUE;
                break;
            };
            break;
        }
        else
        if (*ptr < '0' || *ptr > '9')
        {
            bInvalid = TRUE;
            break;
        };
        ptr++;
    }
}

bInvalid = TRUE;
break;
};

ptr++;
};

if (!bInvalid)
    *dRslt = atof(pTPCC->szWork);
else
{
    sprintf(pTPCC->ErrTxt,
        "Error - Invalid Amount Format (%s)",pTPCC->szWork);
    pTPCC->iStatusId = ERR_AMOUNT_BADFORM;
};

return(bInvalid);
} // GetAmountKey
=====

// Function name: GetKeyValue
// This function parses an HTTP formatted string for specific key
// values. HTTP keys terminate with '='. HTTP values terminate
// with an '&' or '\0'.
//
// Result:
//     FALSE - Key found, string value return in pValue
//     TRUE - Key not found
//
=====
BOOL GetKeyValue(CHAR * pHTML,CHAR * pKey,CHAR * pValue,UINT uMax)
{
    CHAR * ptr;
    if (!(ptr=strstr(pHTML,pKey)))
        return(TRUE);
    if (!(ptr=strchr(ptr,'=')))
        return(TRUE);
    ptr++;
    uMax--;
    while (*ptr && *ptr != '&' && uMax)
    {
        *pValue++ = *ptr++;
        uMax--;
    };
    *pValue = 0;
    return(FALSE);
}; // GetKeyValue
=====

// Function name: FormatLogin
//
=====
VOID FormatLogin(CHAR * pOut,CHAR * pAddText)
{
    sprintf(pOut,"%s<BR>%s<BR>%s",szFormLogin,pAddText,HTMLTrailer);
};

// FormatLogin
=====


```

```

// Function name: FormatMenu
//=====
VOID FormatMenu(CHAR * pOut, TPCC_STATE * pTPCC)
{
    sprintf(pOut,
        "%s<HTML><HEAD><TITLE>TPC-C MainMenu</TITLE></HEAD><BODY>" 
        "Select Desired Transaction.<BR><HR>" 
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\">" 
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\">" 
        "%s</FORM><BR>%s<BR>%s",
        HTTPHdr, pTPCC->iStatusId, pTPCC->iTermId, pTPCC->iSyncId, FORM_MENU,
        szMenuList, pTPCC->ErrTxt, HTMLTrailer);
}; // FormatMenu

//=====
// Function name: FormatNewOrder
//=====
VOID FormatNewOrder(CHAR * pOut, TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_NEWORDER;
    FormatFormHdr(pOut, "TPC-C New Order", pTPCC);
    sprintf(pOut + strlen(pOut),
        "New Order<BR>" 
        "Warehouse: %4.4d District: <INPUT NAME=\"DID\" SIZE=1>" 
        Date:<BR>" 
        "Customer: <INPUT NAME=\"CID\" SIZE=4> Name: 
        Credit: %Disc:<BR>" 
        "Order Number: Number of Lines: W_tax: 
        D_tax:<BR><BR>" 
        " Supp_W Item_Id Item Name Qty Stock B/G Price 
        Amount<BR>" 
        " <INPUT NAME=\"SP00\" SIZE=4> <INPUT NAME=\"IID00\" SIZE=6> 
        <INPUT NAME=\"Qty00\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP01\" SIZE=4> <INPUT NAME=\"IID01\" SIZE=6> 
        <INPUT NAME=\"Qty01\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP02\" SIZE=4> <INPUT NAME=\"IID02\" SIZE=6> 
        <INPUT NAME=\"Qty02\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP03\" SIZE=4> <INPUT NAME=\"IID03\" SIZE=6> 
        <INPUT NAME=\"Qty03\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP04\" SIZE=4> <INPUT NAME=\"IID04\" SIZE=6> 
        <INPUT NAME=\"Qty04\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP05\" SIZE=4> <INPUT NAME=\"IID05\" SIZE=6> 
        <INPUT NAME=\"Qty05\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP06\" SIZE=4> <INPUT NAME=\"IID06\" SIZE=6> 
        <INPUT NAME=\"Qty06\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP07\" SIZE=4> <INPUT NAME=\"IID07\" SIZE=6> 
        <INPUT NAME=\"Qty07\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP08\" SIZE=4> <INPUT NAME=\"IID08\" SIZE=6> 
        <INPUT NAME=\"Qty08\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP09\" SIZE=4> <INPUT NAME=\"IID09\" SIZE=6> 
        <INPUT NAME=\"Qty09\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP10\" SIZE=4> <INPUT NAME=\"IID10\" SIZE=6> 
        <INPUT NAME=\"Qty10\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP11\" SIZE=4> <INPUT NAME=\"IID11\" SIZE=6> 
        <INPUT NAME=\"Qty11\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP12\" SIZE=4> <INPUT NAME=\"IID12\" SIZE=6> 
        <INPUT NAME=\"Qty12\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP13\" SIZE=4> <INPUT NAME=\"IID13\" SIZE=6> 
        <INPUT NAME=\"Qty13\" SIZE=1><BR>" 
        " <INPUT NAME=\"SP14\" SIZE=4> <INPUT NAME=\"IID14\" SIZE=6> 
        <INPUT NAME=\"Qty14\" SIZE=1><BR>" 
        "Execution Status: 
        Total:<BR><HR>" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">" 
        "</FORM>%s",
        pTPCC->sWId, HTMLTrailer);
}; // FormatNewOrder

//=====
// Function name: FormatPayment
//=====
VOID FormatPayment(CHAR * pOut, TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_PAYMENT;
    FormatFormHdr(pOut, "TPC-C Payment", pTPCC);
    sprintf(pOut + strlen(pOut),
        "Payment<BR>" 
        "Date:<BR><BR>" 
        "Warehouse: %4.4d" 
        " District: <INPUT NAME=\"DID\" SIZE=1><BR><BR><BR><BR>" 
        "Customer: <INPUT NAME=\"CID\" SIZE=4>" 
        "Cust-Warehouse: <INPUT NAME=\"CWI\" SIZE=4>" 
        "Cust-District: <INPUT NAME=\"CDI\" SIZE=1><BR>" 
        "Name: <INPUT NAME=\"CLT\" SIZE=16>" 
        Since:<BR>" 
        " Credit:<BR>" 
        " Disc:<BR>" 
        " Phone:<BR><BR>" 
        "Amount Paid: $<INPUT NAME=\"HAM\" SIZE=7> New Cust 
        Balance:<BR>" 
        "Credit Limit:<BR><BR>Cust-Data: <BR><BR><BR></PRE><HR>" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">" 
        "</FORM>%s",
        pTPCC->sWId, HTMLTrailer);
}; // FormatPayment

//=====
// Function name: FormatDelivery
//=====
VOID FormatDelivery(CHAR * pOut, TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_DELIVERY;
    FormatFormHdr(pOut, "TPC-C Delivery", pTPCC);
    sprintf(pOut + strlen(pOut),
        "Delivery<BR>" 
        "Warehouse: %4.4d<BR><BR>" 
        "Carrier Number: <INPUT NAME=\"OCD\" SIZE=1><BR><BR>" 
        "Execution Status:<BR><PRE><HR>" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\">" 

```

```

    "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\" >"
    "</FORM>%s",
    pTPCC->sWId,HTMLTrailer);
} // FormatDelivery

//=====
// Function name: FormatOrderStatus
//=====
VOID FormatOrderStatus(CHAR * pOut,TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_ORDERSTATUS;
    FormatFormHdr(pOut,"TPC-C Order-Status",pTPCC);
    sprintf(pOut + strlen(pOut),
        "<PRE>                                Order-Status<BR>"
        "Warehouse: %4.4d      "
        "District: <INPUT NAME=\"DID\" SIZE=1><BR>"
        "          <Customer: <INPUT NAME=\"CID\" SIZE=4>    Name:<INPUT NAME=\"CLT\" SIZE=23><BR>"
        "          Cust-Balance:<BR><BR>"
        "          Order-Number:           Entry-Date:           Carrier-"
        "Number:<BR>"
        "          Supply-W     Item-Id     Qty      Amount      Delivery-"
        "Date<BR></PRE><HR>"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\" >"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\" >"
        "</FORM>%s",
        pTPCC->sWId,HTMLTrailer);
} // FormatOrderStatus

//=====
// Function name: FormatStockLevel
//=====
VOID FormatStockLevel(CHAR * pOut,TPCC_STATE * pTPCC)
{
    pTPCC->uFormId = FORM_STOCKLEVEL;
    FormatFormHdr(pOut,"TPC-C Stock Level",pTPCC);
    sprintf(pOut + strlen(pOut),
        "<PRE>                                Stock-Level<BR>"
        "Warehouse: %4.4d  District: %2.2d<BR><BR>"
        "Stock Level Threshold: <INPUT NAME=\"TT\" SIZE=2><BR><BR>"
        "low stock:       <BR><HR>"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\" >"
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\" >"
        "</FORM>%s",
        pTPCC->sWId,pTPCC->sDId,HTMLTrailer);
} // FormatStockLevel

//=====
// Function name: FormatFormHdr
//=====
VOID FormatFormHdr(CHAR * pOut,CHAR * pTitle,TPCC_STATE * pTPCC)
{
    sprintf(pOut,
        "%s<HTML><HEAD><TITLE>%s</TITLE></HEAD>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\" >"

```

```

    "<INPUT TYPE=\"hidden\" NAME=\"PI*\" VALUE=\"\" >"
    "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\" >"
    "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\" >"
    "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\" >"
    "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\" >",
    HTTPHdr,pTitle,pTPCC->uFormId,pTPCC->iTermId,pTPCC->iSyncId);
} // FormatFormHdr

//=====
// Function name: FormatRespHdr
//=====
VOID FormatRespHdr(CHAR * pOut,CHAR * pTitle,TPCC_STATE * pTPCC)
{
    sprintf(pOut,
        "%s<HTML><HEAD><TITLE>%s</TITLE></HEAD>"
        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\" >"
        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%d\" >"
        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"%d\" >"
        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"%d\" >"
        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"%d\" >",
        HTTPHdr,pTitle,pTPCC->iStatusId,pTPCC->uFormId,
        pTPCC->iTermId,pTPCC->iSyncId);
} // FormatRespHdr

//=====
// Function name: FormatHTMLString
//=====

// Encodes HTML special characters. If necessary, space fills
// to pOut to total uLen characters.
//=====
VOID FormatHTMLString(CHAR * pOut,CHAR * pIn,UINT uLen)
{
    while (uLen && *pIn)
    {
        *pOut++ = *pIn++;
        uLen--;
    } // while (uLen && *pIn)
    while(uLen--)
        *pOut++ = ' ';
        *pOut = 0;
} // FormatHTMLString

//=====
// Function name: FormatString
//=====

// Encodes formatted string for HTML transmission.
//=====
VOID FormatString(CHAR * pOut,CHAR * pPic,CHAR * pIn)
{
    while(*pPic)
    {
        if (*pPic == 'X' )
        {
            if (*pIn)
                *pOut++ = *pIn++;

```

```

        else
            *pOut++ = ' ';
    }
    else
        *pOut++ = *pPic;
    pPic++;
}
*pOut = 0;
} // FormatString

=====
// FUNCTION: UtilStrCpy
//
// Copies n characters from string pSrc to pDst and places a null
// null character at the end of the destination string. Unlike
// strncpy this function ensures that the result string is always
// null terminated.
//
=====
VOID UtilStrCpy(CHAR * pDest, CHAR * pSrc, INT n)
{
    strncpy(pDest, pSrc, n);
    pDest[n] = '\0';
    return;
} // UtilStrCpy

=====
// Function name: CheckNumeric
//
// Result
//     FALSE - string is all numeric
//     TRUE - sting contains non-numeric characters
//
=====
BOOL CheckNumeric(CHAR * pNum)
{
    if (*pNum == 0)
        return(TRUE);
    while (*pNum && isdigit(*pNum))
        pNum++;
    return(*pNum);
} // CheckNumeric

```

## term.h

```

// term.h

#include <sys\timeb.h>

#define TMILLI_TIMEOUT 3600000 // One hour

typedef struct
{
    BOOL bInUse; // In use flag
    INT iTermId; // TermId
    LPVOID ConnID; // Connection Id
    INT iSyncId; // Sync Id

```

```

    SHORT sWId; // TPCC WareHouse Id
    SHORT sDId; // TPCC District Id
    struct _timeb tbLastAccess; // Last activity timestamp
} TERM_STATE;

BOOL TermInit(INT iSetMaxTerm);
VOID TermTerm(VOID);
TERM_STATE * TermAlloc(VOID);
TERM_STATE * TermGet(INT iTermId);
BOOL TermFree(INT iTermId);

=====
term.c

// term.c
//
// Copyright Unisys, 1997
//
#include <windows.h>
#include <stdio.h>
#include "diagio.h"
#include "timesupp.h"
#include "term.h"

TERM_STATE * pTArray;
INT iNextTerm = 0;
INT iMaxTerm = 0;
CRITICAL_SECTION csTerm;

VOID TermMaint(VOID);

=====
// Function name: TermInit
// Creates and initializes the first TERMINITAL TArray entries.
// Initializes critical section to control access to TArray. Assumes
// access to function is single threaded, no other threads will start
// until this function completes and that function is called once
// (DLL_PROCESS_ATTACH).
//
// Returns:
//     FALSE TArray allocated and initialized
//     TRUE TArray allocation failure
//
=====
BOOL TermInit(INT iSetMaxTerm)
{
    INT iTermId;
    CHAR szDiag[MAX_DIAG_SZ];
    if (pTArray != NULL)
    {
        sprintf(szDiag, "TermInit(%ld): TArray Already Initialized\n",
                GetCurrentThreadId());
        DiagIoWrite(szDiag, DIAG_ERROR);
        return(TRUE);
    }
    InitializeCriticalSection(&csTerm);
    iMaxTerm = iSetMaxTerm;
    pTArray = (TERM_STATE *) malloc(sizeof(TERM_STATE) * (iMaxTerm + 1));
    if (pTArray == NULL)
    {

```

```

sprintf(szDiag, "TermInit(%ld): malloc failed (%ld)\n",
    GetCurrentThreadId(), GetLastError());
DiagToWrite(szDiag, DIAG_ERROR);
return(TRUE);
}
for (iTermId = 1; iTermId <= iMaxTerm; iTermId++)
    TermFree(iTermId);
iNextTerm = 1;
return(FALSE);
} // TermInit
=====
// Function name: TermTerm
//   Frees TArray and deletes csTerm critical section. Assumes access
//   to function is single threaded and no other threads are actively
//   accessing TArray entries (DLL_PROCESS_DETACH).
//
=====
VOID TermTerm(VOID)
{
    DeleteCriticalSection(&csTerm);
    if (pTArray != NULL)
        free(pTArray);
    iNextTerm = 0;
    iMaxTerm = 0;
} // TermTerm
=====
// Function name: TermAlloc
//   Allocates empty TArray. Uses iNextTerm to start search.
//
// Returns:
//   > 0   TArray entry index (iTermId)
//   < 0   Empty TArray entry not available
//
=====
TERM_STATE * TermAlloc(VOID)
{
    INT iTermId = -1;
    if (pTArray == NULL)
    {
        CHAR szDiag[MAX_DIAG_SZ];
        sprintf(szDiag, "TermAlloc(%ld): Term Array Not Allocated\n",
            GetCurrentThreadId());
        DiagToWrite(szDiag, DIAG_ERROR);
        return(NULL);
    };
    EnterCriticalSection(&csTerm);
    _try
    {
        while(iNextTerm <= iMaxTerm)
        {
            if (!pTArray[iNextTerm].bInUse)
            {
                pTArray[iNextTerm].bInUse = TRUE;
                _ftime(&pTArray[iNextTerm].tbLastAccess);
                iTermId = iNextTerm;
                iNextTerm++;
                break;
            };
        };
        iNextTerm++;
    };
    _finally
    {
        LeaveCriticalSection(&csTerm);
    };
    if (iTermId > 0)
        return(&pTArray[iTermId]);
    else
        return(NULL);
}; // TermAlloc
=====
// Function name: TermMaint
//   Clears entries whose last access time exceeds TMILLI_TIMEOUT.
//   Assumes caller has entered csTerm.
//
=====
VOID TermMaint(VOID)
{
    INT iTermId;
    TMILLI tmElapsed;
    // Free entries that have timed out
    for (iTermId = 1; iTermId <= iMaxTerm; iTermId++)
    {
        if (pTArray[iTermId].bInUse)
        {
            tmElapsed = TimebElapsed(&pTArray[iTermId].tbLastAccess);
            if (tmElapsed > TMILLI_TIMEOUT)
                TermFree(iTermId);
        };
    };
}; // TermMaint
=====
```

```

// Function name: TermGet
// Returns pointer to TArray slot at iTermId.
//
// Returns:
//   FALSE TArray entry made available
//   TRUE iTermId invalid.
// -----
TERM_STATE * TermGet(INT iTermId)
{
    TERM_STATE * pTerm;
    TMILLI tmElapsed;
    if (iTermId <= 0 || iTermId > iMaxTerm)
    {
        CHAR szDiag[MAX_DIAG_SZ];
        sprintf(szDiag, "TermGet(%ld): Invalid TermId (%ld)\n",
            GetCurrentThreadId(), iTermId);
        DiagIoWrite(szDiag, DIAG_ERROR);
        return(NULL);
    };
    pTerm = &pTArray[iTermId];
    if (!pTerm->bInUse)
        return(NULL);
    tmElapsed = TimebElapsed(&pTerm->tbLastAccess);
    if (tmElapsed > TMILLI_TIMEOUT)
        return(NULL); // Entry destined to be freed by maint
    _ftime(&pTArray[iTermId].tbLastAccess);
    return(&pTArray[iTermId]);
}; // TermGet
// -----
// Function name: TermFree
//   Initializes contents of TArray slot at iTermId.
//
// Returns:
//   FALSE TArray entry made available
//   TRUE iTermId invalid.
// -----
BOOL TermFree(INT iTermId)
{
    TERM_STATE * pTerm;
    if (iTermId <= 0 || iTermId > iMaxTerm)
    {
        CHAR szDiag[MAX_DIAG_SZ];
        sprintf(szDiag, "TermFree(%ld): Invalid TermId (%ld)\n",
            GetCurrentThreadId(), iTermId);
        DiagIoWrite(szDiag, DIAG_ERROR);
        return(TRUE);
    };
    pTerm = &pTArray[iTermId];
    pTerm->ConnID = 0;
    pTerm->sWId = 0;
    pTerm->sDId = 0;
    pTerm->iSyncId = 0;
    pTerm->iTermId = iTermId;
    TimebClear(&pTerm->tbLastAccess);
    pTerm->bInUse = FALSE;
}; // TermFree

```

## tmon.h

```

// tmon.h

typedef struct
{
    CHAR * pszErrTxt;           // Error text
    CHAR * pTMData;             // TM buffer area
    LONG lTMDataLen;            // TM buffer len
} TMON_STATE;

VOID TMonInit(INT iSetMaxMsg);
VOID TMonTerm(VOID);
BOOL TMInit(TMON_STATE * pTMon);
VOID TMDone(TMON_STATE * pTMon);
BOOL TMTran(CHAR * pService, TMON_STATE * pTMon,
            BOOL * bTPRslt, INT * iTPRslt);
BOOL TMPost(CHAR * pService, TMON_STATE * pTMon);

```

## tmon.c

```

// tmon.c
//
// Copyright Unisys, 1997
//
#include <windows.h>
#include <stdio.h>
#include <atmi.h>
#include "tmon.h"

INT iTMMaxSz;
// -----
// Function name: TMonInit
// -----
VOID TMonInit(INT iSetMaxMsg)
{
    iTMMaxSz = iSetMaxMsg;
}; // TMonInit

// -----
// Function name: TMonTerm
// -----
VOID TMonTerm(VOID)
{
}; // TMonTerm

// -----
// Function name: TMInit
//   Result:
//     FALSE Initialization completed successfully
//     TRUE Initialization failed
// -----

```

```

//=====
BOOL TMInit(TMON_STATE * pTMon)
{
    BOOL bRslt = FALSE;
    TPINIT * tpinfo;

    // Must have ErrTxt message area set before init
    if (pTMon->pszErrTxt == NULL)
        return(TRUE);
    tpinfo = (TPINIT *) tpalloc("TPINIT",NULL,TPINITNEED(20));
    memset(tpinfo,0,sizeof(TPINIT));
    tpinfo->flags=TPMULTICONTEXTS;
    sprintf(tpinfo->cltname,"tpcc%d",GetCurrentThreadId());

    if (tpinit(tpinfo) == -1)
    {
        sprintf(pTMon->pszErrTxt,"TPIInit Failed(%ld)",tperrno);
        bRslt = TRUE;
    }
    else
    {
        pTMon->pTMDData = tpalloc("CARRAY",NULL,iTMMaxSz);
        if (pTMon->pTMDData == NULL)
        {
            sprintf(pTMon->pszErrTxt,"TPAlloc Failed(%ld)",tperrno);
            bRslt = TRUE;
        };
    };

    return(bRslt);
};

// TMInit

//=====
// Function name: TMDone
// 
//=====
VOID TMDone(TMON_STATE * pTMon)
{
    tpfree(pTMon->pTMDData);
    tpterm();
}; // TMDone

//=====
// Function name: TMTran
// 
// Result:
//     FALSE   call completed. bTPRslt contains outcome (FALSE tran
//             success). iTPRslt contains application returned
//             result code.
//     TRUE    TM interface error, ErrTxt has diagnostic.
// 
//=====
BOOL TMTran(CHAR * pService,TMON_STATE * pTMon,
            BOOL * bTPRslt,INT * iTPRslt)
{
    BOOL bRslt = FALSE;
    INT iGrply;

```

```

    iGrply = tpcall(pService,pTMon->pTMDData,iTMMaxSz,
                    &pTMon->pTMDData,&pTMon->lTMDDataLen,TPNOTIME | TPSIGRSTRT);
    if (iGrply != -1)
    {
        *iTPRslt = tpurcode;
        *bTPRslt = FALSE;
    }
    else
    if (tperrno == TPESVCFAIL)
    {
        *iTPRslt = tpurcode;
        *bTPRslt = TRUE;
    }
    else
    {
        sprintf(pTMon->pszErrTxt,"TPCall Failed (%ld)",tperrno);
        bRslt = TRUE;
    };
    return(bRslt);
}; // TMTran

//=====
// Function name: TMPost
// 
// Result:
//     FALSE   transaction submitted with no response expected
//     TRUE    tpacall failed, ErrTxt has diagnostic
// 
//=====
BOOL TMPost(CHAR * pService,TMON_STATE * pTMon)
{
    BOOL bRslt = FALSE;
    INT iCD;

    iCD = tpacall(pService,pTMon->pTMDData,iTMMaxSz,TPNOREPLY);
    if (iCD == -1)
    {
        sprintf(pTMon->pszErrTxt,"TPACall Failed (%ld)",tperrno);
        bRslt = TRUE;
    };
    return(bRslt);
}; // TMPost

```

## timesupp.h

```

// timesupp.h
#include <windows.h>
#include <time.h>
#include <sys\timeb.h>

#define TIMEBSEED_MOD 10000
#define TIMEBSEED_SHIFT 1000
#define TIMEB_STRING_SZ 23
#define TIMEB_STRING_DATESZ 10
#define TIMEB_STRING_TIMEOFFSET 11
#define TIMEB_STRING_TIMESZ 12

typedef ULONG TMILLI;

```

```

TMILLI TimebDiff(struct _timeb * p_tb1, struct _timeb * p_tb2);
VOID TimebCopy(struct _timeb * p_tbDest, struct _timeb * p_tbSource);
TMILLI TimebElapsed(struct _timeb * p_tb1);
VOID TimebClear(struct _timeb * p_tb1);
CHAR * TimebToString(struct _timeb * p_tb1,CHAR * psz,BOOL bMillis);
BOOL TimebFromString(struct _timeb * p_tb1,CHAR * psz);
VOID TimebAddSecs(struct _timeb * p_tb1,INT iSeconds);
ULONG TimebSeed(VOID);

```

## timesupp.c

```

// timesupp.c
// Copyright Unisys, 1997
//

#include <stdio.h>
#include "timesupp.h"

//=====
// Function name: TimebCopy
//   Structure contents copy of _timeb source to _timeb dest.
//=====
VOID TimebCopy(struct _timeb * p_tbDest, struct _timeb * p_tbSource)
{
    p_tbDest->time = p_tbSource->time;
    p_tbDest->millitm = p_tbSource->millitm;
    p_tbDest->dstflag = p_tbSource->dstflag;
    p_tbDest->timezone = p_tbSource->timezone;

}; // TimebCopy

//=====
// Function name: TimebDiff
//   Time difference in milliseconds between _timeb _t1 and _timeb _t2.
//=====
TMILLI TimebDiff(struct _timeb * p_tb1, struct _timeb * p_tb2)
{
    LONG lRslt;
    lRslt = ((p_tb2->time - p_tb1->time) * 1000) +
            (p_tb2->millitm - p_tb1->millitm);
    if (lRslt < 0)
        return(0);
    else
        return((TMILLI) lRslt);

}; // TimebDiff

//=====
// Function name: TimebElapsed
//=====
TMILLI TimebElapsed(struct _timeb * p_tb1)
{

```

```

    struct _timeb _tb2;
    _ftime(&_tb2);
    return (TimebDiff(p_tb1,&_tb2));

}; // TimebElapsed

//=====
// Function name: TimebClear
//=====
VOID TimebClear(struct _timeb * p_tb1)
{
    p_tb1->time = 0;
    p_tb1->millitm = 0;

}; // TimebClear

//=====
// Function name: TimebToString
//   Converts timeb to yyyy:mm:dd,hh:mm:ss.sss format
//=====
CHAR * TimebToString(struct _timeb * p_tb1,CHAR * psz,BOOL bMillis)
{
    struct tm * ptm;
    ptm = localtime(&p_tb1->time);
    sprintf(psz,"%4.4d%2.2d%2.2d.%2.2d:%2.2d:%2.2d",
            ptm->tm_year + 1900,ptm->tm_mon + 1,ptm->tm_mday,
            ptm->tm_hour,ptm->tm_min,ptm->tm_sec);
    if (bMillis)
        sprintf(psz + strlen(psz),".%3.3d",p_tb1->millitm);
    return(psz);
}; // TimebToString

//=====
// Function name: TimebFromString
//   Converts yyyy:mm:dd,hh:mm:ss.sss (TimebToString) format to timeb
//=====
BOOL TimebFromString(struct _timeb * p_tb1,CHAR * psz)
{
    struct tm tmTime;
    struct tm * ptm;
    UINT uLen;

    ptm = &tmTime;
    uLen = strlen(psz);
    if (uLen < (TIMEB_STRING_SZ - 4)) // millis are optional
    {
        p_tb1->time = 0;
        p_tb1->millitm = 0;
        return (TRUE);
    };
    // Clear fields that won't be set
    ptm->tm_wday = 0;
    ptm->tm_yday = 0;
    ptm->tm_isdst = -1;
    // Set tm struct fields from string

```

```

ptm->tm_year = (atoi(psz)) - 1900;
psz += 5;
ptm->tm_mon = (atoi(psz)) - 1;
psz += 3;
ptm->tm_mday = atoi(psz);
psz += 3;
ptm->tm_hour = atoi(psz);
psz += 3;
ptm->tm_min = atoi(psz);
psz += 3;
ptm->tm_sec = atoi(psz);
if (uLen >= TIMEB_STRING_SZ) // Millis present
{
    psz += 3;
    p_tb1->millitm = atoi(psz);
}
p_tb1->time = mktime(ptm);
return(FALSE);
} // TimebFromString

//=====
// Function name: TimebAddSecs
//=====
VOID TimebAddSecs(struct _timeb * p_tb1, INT iSeconds)
{
    p_tb1->time += iSeconds;
} // TimebAddSecs

```

## diagio.h

```

// diagio.h

// Environment variable defaults
#define DEFAULTDIAGLEVEL DIAG_INFO
#define DEFAULTEVENTLOG 0

#define DIAGNOSTICS TRUE
#define MAX_DIAG_SZ 2000

// Severity level of diagnostic report
#define DIAG_FORCE 1
#define DIAG_ERROR 2
#define DIAG_STATE 3
#define DIAG_INFO 4

VOID DiagIoInit(CHAR * pDiagId, BOOL bConsole, BOOL bEvent, UINT uLevel);
VOID DiagIoTerm(VOID);
VOID DiagIoWrite(CHAR * pDiagBuffer, UINT uSeverity);

```

## diagio.c

```

// diagio.c
// Copyright Unisys, 1997
// #include <windows.h>
#include <stdio.h>

```

```

#include "diagio.h"

CRITICAL_SECTION csDiagIo;
HANDLE hEventLog = NULL;
UINT uDiagLevel;
BOOL bEventLog;
BOOL bConsoleLog;
CHAR * pDiagHdr;
CHAR * pEventHost;
CHAR * pErrHdr =
    { "*** ERROR *** ERROR *** ERROR *** ERROR *** ERROR ***" };

INT WriteEventLog(CHAR * pDMsgs[], UINT uMsgCnt, UINT uSeverity);

//=====
// Function name: DiagIoInit
//=====
VOID DiagIoInit(CHAR * pDiagId, BOOL bConsole, BOOL bEvent, UINT uLevel)
{
    if (DIAGNOSTICS)
    {
        InitializeCriticalSection(&csDiagIo);

        uDiagLevel = uLevel;
        bEventLog = bEvent;
        bConsoleLog = bConsole;
        pEventHost = (CHAR *) malloc(10);
        strcpy(pEventHost, ""); // local host
        pDiagHdr = (CHAR *) malloc(strlen(pDiagId) + 1);
        strcpy(pDiagHdr, pDiagId);
        if (bEventLog)
        {
            hEventLog = RegisterEventSource(pEventHost, pDiagId);
            if (hEventLog == NULL)
            {
                bEventLog = FALSE;
                if (bConsoleLog)
                    fprintf(stdout,
                            "%s: Event Log Register Failed (%ld)\n"
                            "Event Log Will NOT be Used\n",
                            pDiagHdr, GetLastError());
            }
            else
            {
                if (bConsoleLog)
                    fprintf(stdout, "%s: Event Logging to LocalHost as %s\n",
                            pDiagHdr, pDiagHdr);
            };
        }; // if bEventLog
    }; // if Diagnostics
}; // DiagIoInit

//=====
// Function name: DiagIoTerm
//=====
VOID DiagIoTerm(VOID)

```

```

{
    if (DIAGNOSTICS)
    {
        DeleteCriticalSection(&csDiagIo);
        if (hEventLog != NULL)
            DeregisterEventSource(hEventLog);
        free(pDiagHdr);
        free(pEventHost);
    };
    // DiagIoTerm

//=====
// Function name: DiagIoWrite
//=====
VOID DiagIoWrite(CHAR * pDiagBuffer, UINT uSeverity)
{
    CHAR * pDMsgs[3];
    UINT uMsgCnt = 0;
    INT iERslt = 0;
    if (DIAGNOSTICS)
    {
        if (uDiagLevel >= uSeverity)
        {
            EnterCriticalSection(&csDiagIo);
            try
            {
                if (uSeverity == DIAG_ERROR)
                {
                    pDMsgs[0] = pDiagHdr;
                    pDMsgs[1] = pErrHdr;
                    pDMsgs[2] = pDiagBuffer;
                    uMsgCnt = 3;
                }
                else
                {
                    pDMsgs[0] = pDiagHdr;
                    pDMsgs[1] = pDiagBuffer;
                    uMsgCnt = 2;
                };
                if (bEventLog)
                    iERslt = WriteEventLog(pDMsgs, uMsgCnt, uSeverity);
                if (bConsoleLog)
                {
                    if (uMsgCnt == 3)
                        fprintf(stdout, "\n%s:\n%s\n%s", pDMsgs[0], pDMsgs[1], pDMsgs[2]);
                    else
                        fprintf(stdout, "\n%s: %s", pDMsgs[0], pDMsgs[1]);
                    if (iERslt != 0)
                        fprintf(stdout,
                            "EventLog Write Failed (%ld), No Longer in Use\n",
                            iERslt);
                }
            };
            finally
            {
                LeaveCriticalSection(&csDiagIo);
            };
        // if uDiagLevel >= uSeverity
    };
}

```

```

    }; // if Diagnostics
}; // DiagIoWrite

INT WriteEventLog(CHAR * pDMsgs[], UINT uMsgCnt, UINT uSeverity)
{
    WORD wType;
    WORD wCount;
    wCount = uMsgCnt;
    switch (uSeverity)
    {
        case DIAG_ERROR:
            wType = EVENTLOG_ERROR_TYPE;
            break;
        default:
            wType = EVENTLOG_INFORMATION_TYPE;
            break;
    };
    if (wType != 0)
    {
        if (!ReportEvent(hEventLog, // event log handle
                         wType, // event type
                         0, // category zero
                         uSeverity, // no event identifier
                         NULL, // no user security identifier
                         wCount, // # of substitution strings
                         0, // no binary data
                         (LPCTSTR *) pDMsgs, // address of string array
                         NULL)) // address of binary
        {
            DeregisterEventSource(hEventLog);
            hEventLog = NULL;
            bEventLog = FALSE;
            return(GetLastError());
        };
        // if ReportEvent failed
    };
    // if wType != 0
    return(0);
}; // WriteEventLog

```

## SERVER MAKEFILES

```

SVR = tpccsvr
SRC = \webrte\tpccctux\tpccsvr.c
DBG = /f "/Zi"
$(SVR).exe: $(SRC)
    erase $(SVR).exe
    $(TUXDIR)\bin\buildserver /f "$(SRC)" /o $(SVR).exe /
NEWORDER:NEWORDER /s PAYMENT:PAYMENT /s ORDERSTS:ORDERSTS /s
STOCKLVL:STOCKLVL -l i:\mssql17\devtools\lib\ntwdplib.lib
    copy $(SVR).exe $(APPDIR)

SVR = tpccdelv
SRC = \webrte\tpccctux\tpccdelv.c
DBG = /f "/Zi"
$(SVR).exe: $(SRC)
    erase $(SVR).exe
    $(TUXDIR)\bin\buildserver /f "$(SRC)" /o $(SVR).exe /
DELIVERY:DELIVERY -l i:\mssql17\devtools\lib\ntwdplib.lib

```

```
copy $(SVR).exe $(APPDIR)
```

## tpccsvr.h

```
// tpccsvr.h
//
// Copyright Unisys, 1997
// Copyright Microsoft, 1996

#include "tpcc.h"

#define DEFCLPACKSIZE      2000
#define DEADLOCKWAIT       10
#define LOGFILE_NAME        "delilog"

// String length constants
#define SERVER_NAME_LEN     20
#define DATABASE_NAME_LEN   20
#define USER_NAME_LEN       20
#define PASSWORD_LEN        20
#define TABLE_NAME_LEN      20
```

## tpcc.h

```
// tpcc.h

#include <time.h>
#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

// TPCCHandler return codes
#define TPCCSEND 1
#define TPCCSENDEND 2
#define TPCCENDNOW 3

// TPCC Service return codes
#define SVC_BADITEMID 1
#define SVC_NOERROR 0
#define SVCERR_DEADLOCK -1
#define SVCERR_NOCUSTOMER -2
#define SVCERR_NOORDERS -3
#define SVCERR_DBLIB -4

// Min/Max transaction data definitions
#define MIN_DId 1
#define MAX_DId 10
#define MIN_OL 5
#define MAX_OL 15
#define MIN_QUANTITY 1
#define MAX_QUANTITY 10
#define MIN_ITEM_ID 1
#define MAX_ITEM_ID 100000
#define MIN_CUST_ID 1
#define MAX_CUST_ID 3000
#define MIN_CARRIER 1
#define MAX_CARRIER 10
#define MIN_THRESHOLD 10
```

```
#define MAX_THRESHOLD 20

// pTPCC->iStatusId codes
#define INVALID_IID          1
#define STATUS_OK              0
#define ERR_CMD_UNKNOWN        -10
#define ERR_TXT_CMD_UNKNOWN    "Unrecognized Command"
#define ERR_ALREADY_LOGGEDIN   -11
#define ERR_TXT_ALREADY_LOGGEDIN "Already Logged In"
#define ERR_TERMID             -12
#define ERR_TXT_TERMID         "TermId or SyncId in Error"
#define ERR_FORM_UNKNOWN        -13
#define ERR_TXT_FORM_UNKNOWN   "Unrecognized FormId"
#define ERR_WID_INVALID         -14
#define ERR_DID_INVALID         -15
#define ERR_MISSING_KEY         -16
#define ERR_NOT_NUMERIC         -17
#define ERR_THRESHOLD_RANGE     -18
#define ERR_EMBEDDED_EMPTY_OL   -19
#define ERR_QUANTITY_INVALID    -20
#define ERR_OL_INVALID           -21
#define ERR_OL_COUNT             -22
#define ERR_TM_INTERFACE         -23
#define ERR_SERVICE_RSLT        -24
#define ERR_INPUT_TOOLONG        -25
#define ERR_IDANDNAME_EMPTY      -26
#define ERR_IDANDNAME_ENTERED    -27
#define ERR_AMOUNT_BADFORM       -28
#define ERR_AMOUNT_INVALID        -29
#define ERR_CARRIER_INVALID       -30
#define ERR_TERM_ALLOC             -31

#define STATUS_LEN 200
#define NAME_LEN 16
#define ADDR_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9

#define MAX_MSG_SZ 5000

typedef struct
{
    short ol_supply_w_id;
    long ol_i_id;
    char ol_i_name[25];
    short ol_quantity;
    char ol_brand_generic[2];
    double ol_i_price;
    double ol_amount;
    short ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    short o.ol_cnt;
    char c_last[NAME_LEN + 1];
    char c_credit[3];
    double c_discount;
```

```

double w_tax;
double d_tax;
long o_id;
short o_commit_flag;
DBDATEREC o_entry_d;
short o_all_local;
double total_amount;
char execution_status[STATUS_LEN];
OL_NEW_ORDER_DATA ol[MAX_OL];
} NEW_ORDER_DATA;

typedef struct
{
    short w_id;
    short d_id;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    DBDATEREC h_date;
    char w_street_1[ADDR_LEN + 1];
    char w_street_2[ADDR_LEN + 1];
    char w_city[ADDR_LEN + 1];
    char w_state[STATE_LEN + 1];
    char w_zip[ZIP_LEN + 1];
    char d_street_1[ADDR_LEN + 1];
    char d_street_2[ADDR_LEN + 1];
    char d_city[ADDR_LEN + 1];
    char d_state[STATE_LEN + 1];
    char d_zip[ZIP_LEN + 1];
    char c_first[NAME_LEN + 1];
    char c_middle[3];
    char c_last[NAME_LEN + 1];
    char c_street_1[ADDR_LEN + 1];
    char c_street_2[ADDR_LEN + 1];
    char c_city[ADDR_LEN + 1];
    char c_state[STATE_LEN + 1];
    char c_zip[ZIP_LEN + 1];
    char c_phone[16];
    DBDATEREC c_since;
    char c_credit[3];
    double c_credit_lim;
    double c_discount;
    double c_balance;
    char c_data[200+1];
    char execution_status[STATUS_LEN];
} PAYMENT_DATA;

typedef struct
{
    long ol_i_id;
    short ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    DBDATEREC ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    short w_id;
    short d_id;

```

```

    long c_id;
    char c_first[NAME_LEN + 1];
    char c_middle[3];
    char c_last[NAME_LEN + 1];
    double c_balance;
    long o_id;
    DBDATEREC o_entry_d;
    short o_carrier_id;
    OL_ORDER_STATUS_DATA olOrderStatusData[MAX_OL];
    short o.ol_cnt;
    char execution_status[STATUS_LEN];
} ORDER_STATUS_DATA;

typedef struct
{
    short w_id;
    short o_carrier_id;
    long o_id[10];
    int iComplete;
    SYSTEMTIME QTime;           // time delivery was queued
    SYSTEMTIME EndTime;         // time delivery completed
    char execution_status[STATUS_LEN];
} DELIVERY_DATA;

typedef struct
{
    short w_id;
    short d_id;
    short thresh_hold;
    long low_stock;
    char execution_status[STATUS_LEN];
} STOCK_LEVEL_DATA;

```

## tpccsvr.c

```

// tpccsvr.c
//
// Copyright Unisys, 1997
// Copyright Microsoft, 1996

#include <windows.h>
#include <malloc.h>
#include <stdarg.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>

#include <atmi.h>
#include <userlog.h>

#include "tpccsvr.h"

char szServer[32] = "tpccserver";
char szUser[32] = { 0 };
char szPassword[32] = { 0 };
char szDatabase[32] = "tpcc";
char szService[16] = "tpccsvr";
char szWork[200];

```

```

PDBPROCESS      dbproc;
int      spid;                                // spid assigned from dblib
BOOL     bFailed;
BOOL     bDeadlock;
short    DeadlockRetry = (short)3;

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
char *dberrstr, char *oserrstr);
int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity, char *msgtext);
int SQLStockLevel(STOCK_LEVEL_DATA *psld);
int SQLNewOrder(NEW_ORDER_DATA * pnod);
int SQLPayment(PAYMENT_DATA *ppd);
int SQLOrderStatus(ORDER_STATUS_DATA * pOrderStatus);
void UtilStrCpy(char * pDest, char * pSrc, int n);
VOID GetArgs(INT argc, CHAR **argv);

//=====================================================================
// Function name: tpsvrinit
//=====
tpsvrinit(int argc, char *argv[])
{
    GetArgs(argc, argv);
    sprintf(szWork,"%s Started, DBServer=%s,DB=%s",
           szService,szServer,szDatabase);
    userlog(szWork);
    if (SQLInit(szServer,szDatabase,szUser,szPassword))
        return(-1);
    userlog("Database open, initialization complete");
    return(0);
} // tpsvrinit

//=====================================================================
// Function name: tpsvrdone
//=====
void tpsvrdone()
{
    userlog("Shutdown request for tpcctux server");
    dbclose(dbproc);
    dbexit();
} // tpsvrdone

//=====================================================================
// Function name: NEWORDER
//   Entry point called by tuxedo for NEWORDER service requests.
//=====
void NEWORDER(TPSVCINFO * svcinfo)
{
    int iRslt;
    NEW_ORDER_DATA * pnod;

    pnod = (NEW_ORDER_DATA *) svcinfo->data;
    iRslt = SQLNewOrder(pnod);
}

//=====================================================================
// Check for DBLib termination error
if (bFailed)
{
    strcpy(pnod->execution_status,szWork);
    tpreturn(TPFAIL,SVCERR_DBLIB,svcinfo->data,svcinfo->len,0);
}
else
if (iRslt == 0)
    tpreturn(TPSUCCESS,0,svcinfo->data,svcinfo->len,0);
else
    tpreturn(TPFAIL,iRslt,svcinfo->data,svcinfo->len,0);
}; // NEWORDER

//=====================================================================
// Function name: PAYMENT
//   Entry point called by tuxedo for PAYMENT service requests.
//=====
void PAYMENT(TPSVCINFO * svcinfo)
{
    int iRslt;
    PAYMENT_DATA * ppd;

    ppd = (PAYMENT_DATA *) svcinfo->data;
    iRslt = SQLPayment(ppd);

    if (bFailed)
    {
        strcpy(ppd->execution_status,szWork);
        tpreturn(TPFAIL,SVCERR_DBLIB,svcinfo->data,svcinfo->len,0);
    }
    else
    if (iRslt == 0)
        tpreturn(TPSUCCESS,0,svcinfo->data,svcinfo->len,0);
    else
        tpreturn(TPFAIL,iRslt,svcinfo->data,svcinfo->len,0);
}; // PAYMENT

//=====================================================================
// Function name: ORDERSTS
//   Entry point called by tuxedo for ORDERSTS service requests.
//=====
void ORDERSTS(TPSVCINFO * svcinfo)
{
    int iRslt;
    ORDER_STATUS_DATA * posd;

    posd = (ORDER_STATUS_DATA *) svcinfo->data;
    iRslt = SQLOrderStatus(posd);

    // Check for DBLib termination error
    if (bFailed)
    {
        strcpy(posd->execution_status,szWork);
        tpreturn(TPFAIL,SVCERR_DBLIB,svcinfo->data,svcinfo->len,0);
    }
}

```

```

}
else
if (iRslt == 0)
    tpreturn(TPSUCCESS,0,svcinfo->data,svcinfo->len,0);
else
    tpreturn(TPFAIL,iRslt,svcinfo->data,svcinfo->len,0);
}; // ORDERSTS

//=====
// Function name: STOCKLVL
//
// Entry point called by tuxedo for STOCKLVL service requests.
//
//=====
void STOCKLVL(TPSVCINFO * svcinfo)
{
    int iRslt;
    STOCK_LEVEL_DATA * psld;

    psld = (STOCK_LEVEL_DATA *) svcinfo->data;
    iRslt = SQLStockLevel(psld);

    // Check for DBLib termination error
    if (bFailed)
    {
        strcpy(psld->execution_status,szWork);
        tpreturn(TPFAIL,SVCERR_DBLIB,svcinfo->data,svcinfo->len,0);
    }
    else
    if (iRslt == 0)
        tpreturn(TPSUCCESS,0,svcinfo->data,svcinfo->len,0);
    else
        tpreturn(TPFAIL,iRslt,svcinfo->data,svcinfo->len,0);
}; // STOCKLVL

//=====
// Function name: SQLInit
//
// Set global dbproc and spid.
//
// Result:
//      FALSE - database open, dbproc valid
//      TRUE - database open failed
//
//=====
BOOL SQLInit(CHAR * pSvr,CHAR * pDB,CHAR * pUsr,CHAR * pPW,CHAR * pSvc)
{
    char szApp[32];
    char server[256];
    char database[256];
    char user[256];
    char password[256];
    LOGINREC *login;

    dbinit();
    // install error and message handlers
    dbmsghandle((DBMSGHANDLE_PROC)msg_handler);
    dberrhandle((DBERRHANDLE_PROC)err_handler);
}

```

```

dbproc = NULL;
strcpy(server,pSvr);
strcpy(database,pDB);
strcpy(user,pUsr);
strcpy(password,pPW);
sprintf(szApp,"%s%ld",pSvc,_getpid());

login = dblogin();
if (!*user)
    DBSETLUSER(login,"sa");
else
    DBSETLUSER(login,user);
DBSETLPWD(login,password);
DBSETLHOST(login,szApp);
DBSETLVERSION(login, DBVER60);
// DBSETLPACKET(login,(unsigned short)DEFCLPACKSIZE);

if ((dbproc = dbopen(login,server)) == NULL)
{
    userlog("dbopen failed");
    return TRUE;
}
// Use the the right database
dbuse(dbproc,database);
dbcmd(dbproc,"select @@spid");
dbsqlexec(dbproc);
while (dbresults(dbproc) != NO_MORE_RESULTS)
{
    dbbind(dbproc,1,SMALLBIND,(DBINT) 0,(BYTE *) spid);
    while (dbnextrow(dbproc) != NO_MORE_ROWS)
        ;
};

dbcmd(dbproc,"set nocount on");
dbsqlexec(dbproc);
while (dbresults(dbproc) != NO_MORE_RESULTS)
{
    while (dbnextrow(dbproc) != NO_MORE_ROWS)
        ;
};

//rollback transaction on abort
dbcmd(dbproc,"set XACT_ABORT ON");
dbsqlexec(dbproc);
while (dbresults(dbproc) != NO_MORE_RESULTS)
{
    while (dbnextrow(dbproc) != NO_MORE_ROWS)
        ;
};

return(FALSE);
}; // SQLInit

//=====
// FUNCTION: err_handler
//
// Handles DB-Library errors
//
// ARGUMENTS:

```

```

// DBPROCESS *dbproc    DBPROCESS id pointer
// int      severity   severity of error
// int      dberr      error id
// int      oserr      operating system specific error code
// char     *dberrstr  printable error description of dberr
// char     *oserrstr  printable error description of oserr
//
// RETURNS:
// int      INT_CANCEL
//
// COMMENTS:  None
//
//=====
int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
char *dberrstr, char *oserrstr)
{
    if ((dbproc == NULL) || (DBDEAD(dbproc)))
    {
        userlog("ErrHandler: DBPROC is invalid");
        return INT_CANCEL;
    }
    if (bFailed)
        return INT_CANCEL;
    if (oserr != DBNOERR)
    {
        sprintf(szWork,"ErrHandler: OSerr(%ld) - %s",oserr,oserrstr);
        userlog(szWork);
        bFailed = TRUE;
    }

    return INT_CANCEL;
}; // err_handler

//=====
// FUNCTION: msg_handler
//
// Handles DB-Library SQL Server error messages
//
// ARGUMENTS:
// DBPROCESS *dbproc    DBPROCESS id pointer
// DBINT    msgno      message number
// int      msgstate   message state
// int      severity   message severity
// char     *msgtext    printable message description
//
// RETURNS:  int      INT_CONTINUE  continue operation
//           INT_CANCEL    cancel operation
//
// COMMENTS: This function also sets the dead lock dbproc
//           variable if necessary.
//
//=====
int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity, char *msgtext)
{
    if ((msgno == 5701) || (msgno == 2528) ||
        (msgno == 5703) || (msgno == 6006))
        return INT_CONTINUE;
}

```

```

// deadlock message
if (msgno == 1205)
{
    // set the deadlock indicator
    bDeadlock = TRUE;
    return INT_CONTINUE;
};

if (bFailed)
    return INT_CANCEL;

if (msgno == 0)
    return INT_CONTINUE;
else
{
    sprintf(szWork,"MsgHandler: MsgNo(%ld) - %s",msgno,msgtext);
    userlog(szWork);
    bFailed = TRUE;
};

return INT_CANCEL;
}; // msg_handler

//=====
// FUNCTION: SQLStockLevel
//
// Handles the stock level transaction.
//
// ARGUMENTS:
// STOCK_LEVEL_DATA StockLevel input / output data structure
// dbdata (global)
// bDeadlock (global)
//
// RETURNS:
// SVC_NOERROR  success
// !SVC_NOERROR failure
//
// COMMENTS:  None
//
//=====
int SQLStockLevel(STOCK_LEVEL_DATA * psld)
{
    int tryit;
    short num_deadlocks = 0;
    RETCODE rc;
    BYTE * pData;

    bFailed = FALSE;
    bDeadlock = FALSE;

    for (tryit=0; tryit < DeadlockRetry; tryit++)
    {
        if (dbrpcinit(dbproc,"tpcc_stocklevel",0) == SUCCEED)
        {
            dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                      (BYTE *) &psld->w_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT1, -1, -1,
                      (BYTE *) &psld->d_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                      (BYTE *) &psld->thresh_hold);
        }
    }
}

```

```

if (dbrpcexec(dbproc) == SUCCEED)
{
    while (((rc = dbresults(dbproc)) != NO_MORE_RESULTS) &&
           (rc != FAIL))
    {
        if (DBROWS(dbproc))
        {
            while (((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) &&
                   (rc != FAIL))
            {
                if(pData=dbdata(dbproc,1))
                    psld->low_stock = *((long *) pData);
            };
        }; // if (DBROWS(dbproc)
    }; // while (dbresults)
}; // if (dbrpcexec)
// if (dbrpcinit)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("StockLevel Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{
    strcpy(psld->execution_status,"Transaction committed.");
    return(SVC_NOERROR);
};
// for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(psld->execution_status,"Hit deadlock max.");
userlog("StockLevel Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);

}; // SQLStockLevel
=====
// FUNCTION: SQLNewOrder
//
// Handles the new order transaction.
//
// ARGUMENTS:
//   NEW_ORDER_DATA      NewOrder structure for input/output data
//   dbdata  (global)
//   bDeadlock (global)
//
// RETURNS:
//   SVC_NOERROR  success
//   !SVC_NOERROR failure
//
// COMMENTS:  None
//
//=====
int SQLNewOrder(NEW_ORDER_DATA * pnod)
{
    RETCODE rc;
    int i;
    DBINT commit_flag;

```

```

short num_deadlocks = 0;
int tryit;
DBDATETIME datetime;
BYTE * pData;

bFailed = FALSE;
bDeadlock = FALSE;

for (tryit=0; tryit < DeadlockRetry; tryit++)
{
    if (dbrpcinit(dbproc,"tpcc_neworder",0) == SUCCEED)
    {
        dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                   (BYTE *) &pnod->w_id);
        dbrpcparam(dbproc, NULL, 0, SQLINT1, -1, -1,
                   (BYTE *) &pnod->d_id);
        dbrpcparam(dbproc, NULL, 0, SQLINT4, -1, -1,
                   (BYTE *) &pnod->c_id);
        dbrpcparam(dbproc, NULL, 0, SQLINT1, -1, -1,
                   (BYTE *) &pnod->o.ol_cnt);

        pnod->o.all_local = 1;
        for (i = 0; i < pnod->o.ol_cnt; i++)
        {
            if (pnod->o.all_local &&
                pnod->o.ol[i].ol_supply_w_id != pnod->w_id )
                pnod->o.all_local = 0;
        };
        dbrpcparam(dbproc, NULL, 0, SQLINT1, -1, -1,
                   (BYTE *) &pnod->o.all_local);

        for (i = 0; i < pnod->o.ol_cnt; i++)
        {
            dbrpcparam(dbproc, NULL, 0, SQLINT4, -1, -1,
                       (BYTE *) &pnod->o.ol[i].ol_i_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                       (BYTE *) &pnod->o.ol[i].ol_supply_w_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1,
                       (BYTE *) &pnod->o.ol[i].ol_quantity);
        };

        if (dbrpcexec(dbproc) == SUCCEED)
        {
            pnod->total_amount=0;
            // Get results from order line
            for (i = 0; i<pnod->o.ol_cnt; i++)
            {
                if (((rc = dbresults(dbproc)) != NO_MORE_RESULTS) &&
                    (rc != FAIL))
                {
                    if (DBROWS(dbproc) && (dbnumcols(dbproc) == 5))
                    {
                        while (dbnextrow(dbproc) != NO_MORE_ROWS)
                        {
                            if(pData=dbdata(dbproc, 1))
                                UtilStrCpy(pnod->o.ol[i].ol_i_name,pData,dbdatlen(dbproc, 1));
                            if(pData=dbdata(dbproc, 2))
                                pnod->o.ol[i].ol_stock = (* (DBSMALLINT *) pData);
                            if(pData=dbdata(dbproc, 3))

```

```

        UtilStrCpy(pnod-
>Ol[i].ol_brand_generic,pData,dbdatlen(dbproc, 3));
        if(pData=dbdata(dbproc, 4))

dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
          SQLFLTN,(CHAR *) &pnod->Ol[i].ol_i_price,8);
        if(pData=dbdata(dbproc, 5))

dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
          SQLFLTN,(CHAR *) &pnod->Ol[i].ol_amount,8);
        pnod->total_amount = pnod->total_amount + pnod-
>Ol[i].ol_amount;
        }; // while (dbnextrow)
        }; // if (DBROWS && dbnumcols)
    }; // if (dbresults)
}; // for (o.ol_cnt)
while (((rc = dbresults(dbproc)) != NO_MORE_RESULTS) &&
       (rc != FAIL))
{
    if (DBROWS(dbproc) && (dbnumcols(dbproc) == 8))
    {
        while (((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) &&
               (rc != FAIL))
        {
            if(pData=dbdata(dbproc, 1))
                dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
                          SQLFLTN,(CHAR *) &pnod->w_tax,8);
            if(pData=dbdata(dbproc, 2))
                dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
                          SQLFLTN,(CHAR *) &pnod->d_tax,8);
            if(pData=dbdata(dbproc, 3))
                pnod->o_id = (*(DBINT *) pData);
            if(pData=dbdata(dbproc, 4))
                UtilStrCpy(pnod->c_last,pData,dbdatlen(dbproc,4));
            if(pData=dbdata(dbproc, 5))
                dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
                          SQLFLTN,(CHAR *) &pnod->c_discount,8);
            if(pData=dbdata(dbproc, 6))
                UtilStrCpy(pnod-
>c_credit,pData,dbdatlen(dbproc,6));
            if(pData=dbdata(dbproc, 7))
            {
                datetime = *((DBDATETIME *) pData);
                dbdatecrack(dbproc,&pnod->o_entry_d,&datetime);
            };
            if(pData=dbdata(dbproc, 8))
                commit_flag = (*(DBTINYINT *) pData);
            }; // while (dbnextrow)
        }; // if (DBROWS && dbnumcols)
    }; // while (dbresults)
}; // if (dbrpcexec)
}; // if (dbrpcinit)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("NewOrder Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{

```

```

    if (commit_flag == 1)
    {
        pnod->total_amount = pnod->total_amount *
            ((1 + pnod->w_tax + pnod->d_tax) * (1 - pnod->c_discount));
        strcpy(pnod->execution_status,"Transaction committed.");
        return(SVC_NOERROR);
    }
    else
    {
        strcpy(pnod->execution_status,"Item number is not valid.");
        return(SVC_BADITEMID);
    };
}; // !bDeadlock
}; // for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(pnod->execution_status,"Hit deadlock max.");
userlog("NewOrder Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);

}; // SQLNewOrder

//=====
// FUNCTION: SQLPayment
//
// Handles the payment transaction.
//
// ARGUMENTS:
//     PAYMENT_DATA      Payment input/output data structure
//     dbdata (global)
//     bDeadlock (global)
//
// RETURNS:
//     SVC_NOERROR  success
//     !SVC_NOERROR failure
//
// COMMENTS:  None
//
//=====
int SQLPayment(PAYMENT_DATA *ppd)
{
    RETCODE rc;
    int tryit;
    short num_deadlocks = 0;
    DBDATETIME datetime;
    BYTE * pData;

    bFailed = FALSE;
    bDeadlock = FALSE;

    for (tryit=0; tryit < DeadlockRetry; tryit++)
    {
        if (dbrpcinit(dbproc,"tpcc_payment",0) == SUCCEED)
        {
            dbrpcparam(dbproc,NULL,0,SQLINT2,-1,-1,(BYTE *) &ppd->w_id);
            dbrpcparam(dbproc,NULL,0,SQLINT2,-1,-1,(BYTE *) &ppd->c_w_id);
            dbrpcparam(dbproc,NULL,0,SQLFLT8,-1,-1,(BYTE *) &ppd->h_amount);
            dbrpcparam(dbproc,NULL,0,SQLINT1,-1,-1,(BYTE *) &ppd->d_id);
            dbrpcparam(dbproc,NULL,0,SQLINT1,-1,-1,(BYTE *) &ppd->c_d_id);
            dbrpcparam(dbproc,NULL,0,SQLINT4,-1,-1,(BYTE *) &ppd->c_id);
            if (ppd->c_id == 0)

```

```

        {
            dbrpcparam(dbproc,NULL,0,SQLCHAR,-1,strlen(ppd->c_last),ppd-
>c_last);
        };
        if (dbrpcexec(dbproc) == SUCCEED)
        {
            while (((rc = dbresults(dbproc)) != NO_MORE_RESULTS) && (rc !=
FAIL))
            {
                if (DBROWS(dbproc) && (dbnumcols(dbproc) == 27))
                {
                    while (((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) && (rc !=
FAIL))
                    {
                        if (pData=dbdata(dbproc,1))
                            ppd->c_id = *((DBINT *) pData);
                        if (pData=dbdata(dbproc,2))
                            UtilStrCpy(ppd->c_last,pData,dbdatlen(dbproc,2));
                        if (pData=dbdata(dbproc,3))
                        {
                            datetime = *((DBDATETIME *) pData);
                            dbdatecrack(dbproc,&ppd->h_date,&datetime);
                        };
                        if (pData=dbdata(dbproc,4))
                            UtilStrCpy(ppd->w_street_1,pData,dbdatlen(dbproc,4));
                        if (pData=dbdata(dbproc,5))
                            UtilStrCpy(ppd->w_street_2,pData,dbdatlen(dbproc,5));
                        if (pData=dbdata(dbproc,6))
                            UtilStrCpy(ppd->w_city,pData,dbdatlen(dbproc,6));
                        if (pData=dbdata(dbproc,7))
                            UtilStrCpy(ppd->w_state,pData,dbdatlen(dbproc,7));
                        if (pData=dbdata(dbproc,8))
                            UtilStrCpy(ppd->w_zip,pData,dbdatlen(dbproc,8));
                        if (pData=dbdata(dbproc,9))
                            UtilStrCpy(ppd->d_street_1,pData,dbdatlen(dbproc,9));
                        if (pData=dbdata(dbproc,10))
                            UtilStrCpy(ppd-
>d_street_2,pData,dbdatlen(dbproc,10));
                        if (pData=dbdata(dbproc,11))
                            UtilStrCpy(ppd->d_city,pData,dbdatlen(dbproc,11));
                        if (pData=dbdata(dbproc,12))
                            UtilStrCpy(ppd->d_state,pData,dbdatlen(dbproc,12));
                        if (pData=dbdata(dbproc,13))
                            UtilStrCpy(ppd->d_zip,pData,dbdatlen(dbproc,13));
                        if (pData=dbdata(dbproc,14))
                            UtilStrCpy(ppd->c_first,pData,dbdatlen(dbproc,14));
                        if (pData=dbdata(dbproc,15))
                            UtilStrCpy(ppd->c_middle,pData,dbdatlen(dbproc,15));
                        if (pData=dbdata(dbproc,16))
                            UtilStrCpy(ppd-
>c_street_1,pData,dbdatlen(dbproc,16));
                        if (pData=dbdata(dbproc,17))
                            UtilStrCpy(ppd-
>c_street_2,pData,dbdatlen(dbproc,17));
                        if (pData=dbdata(dbproc,18))
                            UtilStrCpy(ppd->c_city,pData,dbdatlen(dbproc,18));
                        if (pData=dbdata(dbproc,19))
                            UtilStrCpy(ppd->c_state,pData,dbdatlen(dbproc,19));
                        if (pData=dbdata(dbproc,20))
                            UtilStrCpy(ppd->c_zip,pData,dbdatlen(dbproc,20));
                    }
                }
            }
        }
    }
}

```

```

if (pData=dbdata(dbproc,21))
    UtilStrCpy(ppd->c_phone,pData,dbdatlen(dbproc,21));
if (pData=dbdata(dbproc,22))
{
    datetime = *((DBDATETIME *) pData);
    dbdatecrack(dbproc,&ppd->c_since, &datetime);
};
if (pData=dbdata(dbproc,23))
    UtilStrCpy(ppd->c_credit,pData,dbdatlen(dbproc,23));
if (pData=dbdata(dbproc,24))
    dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
              SQLFLTN,(CHAR *) &ppd->c_credit_lim,8);
if (pData=dbdata(dbproc,25))
    dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
              SQLFLTN,(CHAR *) &ppd->c_discount,8);
if (pData=dbdata(dbproc,26))
    dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
              SQLFLTN,(CHAR *) &ppd->c_balance,8);
if (pData=dbdata(dbproc,27))
    UtilStrCpy(ppd->c_data,pData,dbdatlen(dbproc,27));
} // while (dbnextrow)
}; // if (DBROWS && dbnumcols)
}; // while (dbresults)
}; // if (dbrpcexec)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("Payment Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{
    if (ppd->c_id == 0)
    {
        strcpy(ppd->execution_status,"Invalid Customer id,name.");
        return(SVCERR_NOCUSTOMER);
    }
    else
        strcpy(ppd->execution_status,"Transaction committed.");
    return(SVC_NOERROR);
}; // !bDeadlock
}; // for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(ppd->execution_status,"Hit deadlock max.");
userlog("Payment Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);

}; // SQLPayment
//=====================================================================
// FUNCTION: SQLOrderStatus
//
// Handles the Order Status transaction.
//
// ARGUMENTS:
// ORDER_STATUS_DATA      Payment input/output data structure
// dbdata (global)
// bDeadlock (global)
//

```

```

// RETURNS:
//   SVC_NOERROR  success
//   !SVC_NOERROR failure
// COMMENTS:  None
// =====
int SQLOrderStatus(ORDER_STATUS_DATA * posd)
{
    RETCODE rc;
    int tryit;
    short num_deadlocks = 0;
    int i;
    DBDATETIME datetime;
    BYTE * pData;

    bFailed = FALSE;
    bDeadlock = FALSE;

    for (tryit=0; tryit < DeadlockRetry; tryit++)
    {
        if (dbrpcinit(dbproc, "tpcc_orderstatus", 0) == SUCCEED)
        {
            dbrpcparam(dbproc, NULL, 0, SQLINT2, -1, -1, (BYTE *) &posd->w_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT1, -1, -1, (BYTE *) &posd->d_id);
            dbrpcparam(dbproc, NULL, 0, SQLINT4, -1, -1, (BYTE *) &posd->c_id);
            if (posd->c_id == 0)
            {
                dbrpcparam(dbproc, NULL, 0, SQLCHAR, -1, strlen(posd->c_last), posd->c_last);
            };
            if (dbrpcexec(dbproc) == SUCCEED)
            {
                while (((rc = dbresults(dbproc)) != NO_MORE_RESULTS) && (rc != FAIL))
                {
                    if (DBROWS(dbproc) && (dbnumcols(dbproc) == 5))
                    {
                        i = 0;
                        while (((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) && (rc != FAIL))
                        {
                            if (pData=dbdata(dbproc,1))
                                posd->OlOrderStatusData[i].ol_supply_w_id =
(* (DBSMALLINT *) pData);
                                if (pData=dbdata(dbproc,2))
                                    posd->OlOrderStatusData[i].ol_i_id = (* (DBINT *) pData);
                                if (pData=dbdata(dbproc,3))
                                    posd->OlOrderStatusData[i].ol_quantity =
(* (DBSMALLINT *) pData);
                                if (pData=dbdata(dbproc,4))
                                    dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
SQLFLTN,(CHAR *) &posd->OlOrderStatusData[i].ol_amount,8);
                                if (pData=dbdata(dbproc,5))
                                {
                                    datetime = *((DBDATETIME *) pData);
                                    dbdatecrack(dbproc,&posd->OlOrderStatusData[i].ol_delivery_d,&datetime);
                                };
                            };
                        };
                    };
                };
            };
        };
    };
};

i++;
};

// while (dbnextrow)
posd->o.ol_cnt = i;
} // if (DBROWS && dbnumcols == 5)
else
if (DBROWS(dbproc) && (dbnumcols(dbproc) == 8))
{
    while (((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) && (rc != FAIL))
    {
        if (pData=dbdata(dbproc,1))
            posd->c_id = (* (DBINT *) pData);
        if (pData=dbdata(dbproc,2))
            UtilStrCpy(posd->c_last,pData,dbdatlen(dbproc,2));
        if (pData=dbdata(dbproc,3))
            UtilStrCpy(posd->c_first,pData,dbdatlen(dbproc,3));
        if (pData=dbdata(dbproc,4))
            UtilStrCpy(posd->c_middle,pData,dbdatlen(dbproc,4));
        if (pData=dbdata(dbproc,5))
        {
            datetime = *((DBDATETIME *) pData);
            dbdatecrack(dbproc,&posd->o_entry_d,&datetime);
        };
        if (pData=dbdata(dbproc,6))
            posd->o_carrier_id = (* (DBSMALLINT *) pData);
        if (pData=dbdata(dbproc,7))
            dbconvert(dbproc,SQLNUMERIC,pData,sizeof(DBNUMERIC),
SQLFLTN,(CHAR *) &posd->c_balance,8);
        if (pData=dbdata(dbproc,8))
            posd->o_id = (* (DBINT *) pData);
        }; // while (dbnextrow)
    }; // if (DBROWS && dbnumcols == 8)
    if (i==0)
        return(SVCERR_NOORDERS); // "No orders found for customer"
}; // while (dbresults)
}; // if (dbrpcexec)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("OrderStatus Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{
    if (posd->c_id == 0 && posd->c_last[0] == 0)
    {
        strcpy(posd->execution_status,"Invalid Customer id,name.");
        return(SVCERR_NOCUSTOMER);
    }
    else
        strcpy(posd->execution_status,"Transaction committed.");
    return(SVC_NOERROR);
}; // !bDeadlock
}; // for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(posd->execution_status,"Hit deadlock max.");
userlog("OrderStatus Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);

```

```

}; // SQLOrderStatus

//=====
// FUNCTION: UtilStrCpy
//
// Copies n characters from string pSrc to pDst and places a null
// null character at the end of the destination string. Unlike
// strcpy this function ensures that the result string is always
// null terminated.
//=====
void UtilStrCpy(char * pDest, char * pSrc, int n)
{
    strncpy(pDest, pSrc, n);
    pDest[n] = '\0';
    return;
} // UtilStrCpy

//=====
// Function name: GetArgs
//=====
VOID GetArgs(INT argc, CHAR **argv)
{
    INT j;
    CHAR * ptr;
    BOOL bRslt = TRUE;

    for (j = 1; j < argc; ++j)
    {
        ptr = argv[j];
        switch (ptr[1])
        {
            case 's':
            case 'S':
                strcpy(szServer,ptr+2);
                break;

            case 'd':
            case 'D':
                strcpy(szDatabase,ptr+2);
                break;

            }; // switch(ptr[1])
        }; // for (j = 1; j < argc; ++j)
    } // GetArgs
}

```

### tpccdelv.c

```

// tpccdelv./ tpccdelv.c
// Copyright Unisys, 1997
// Copyright Microsoft, 1996

#include <windows.h>
#include <malloc.h>
#include <stdarg.h>
#include <stdio.h>

```

```

#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>

#include <atmi.h>
#include <userlog.h>

#include "tpccsvr.h"

int iServerNo = 0;
char szServer[32] = "tpccdelv";
char szUser[32] = { 0 };
char szPassword[32] = { 0 };
char szDatabase[32] = "tpcc";
char szService[16] = "tpccdelv";
char szWork[200];

PDBPROCESS dbproc;
int spid; // spid assigned from dblib
BOOL bFailed;
BOOL bDeadlock;
short DeadlockRetry = (short)10;

FILE *fpLog;
char szLogTitle[32];
BOOL bFlush = FALSE; // flush after every write

int err_handler(DBPROCESS *dbproc,int severity,int dberr,int oserr,
                char *dberrstr, char *oserrstr);
int msg_handler(DBPROCESS *dbproc,DBINT msgno,int msgstate,
                int severity,char *msgtext);
void WriteLog(DELIVERY_DATA * pdd);
BOOL OpenLogFile(void);
void CalculateElapsed(int * pElapsed,LPSYSTEMTIME lpBegin,
                      LPSYSTEMTIME lpEnd);
void UtilStrCpy(char * pDest, char * pSrc, int n);
void GetArgs(INT argc, CHAR **argv);

//=====
// Function name: tpsvrinit
//=====
tpsvrinit(int argc, char *argv[])
{
    GetArgs(argc,argv);
    iServerNo = _getpid();
    sprintf(szWork,"%s%ld Started, DBServer=%s, DB=%s",
            szService,iServerNo,szServer,szDatabase);
    userlog(szWork);
    if (OpenLogFile())
        return(-1);
    if (SQLInit(szServer,szDatabase,szUser,szPassword))
        return(-1);
    userlog("Database open, initialization complete");
    return(0);
}; // tpsvrinit
//=====
//
```

```

// Function name: tpsvrdone
//
//===-
void tpsvrdone()
{
    userlog("Shutdown request for tpccdelv server");
    if ( fpLog )
        fclose(fpLog);
    dbclose(dbproc);
    dbexit();
}; // tpsvrdone

//=====
// Function name: DELIVERY
//
// Entry point called by tuxedo for DELIVERY service requests.
//=====
void DELIVERY(TPSVCINFO * svcinfo)
{
    int iRslt;
    DELIVERY_DATA * pdd;

    pdd = (DELIVERY_DATA *) svcinfo->data;
    iRslt = SQLDelivery(pdd);
    WriteLog(pdd);

    // Check for DBLib termination error
    if (bFailed)
    {
        strcpy(pdd->execution_status,szWork);
        userlog(szWork);
        tpreturn(TPFAIL,SVCERR_DBLIB,svcinfo->data,svcinfo->len,0);
    }
    else
    if (iRslt == 0)
        tpreturn(TPSUCCESS,0,svcinfo->data,svcinfo->len,0);
    else
        tpreturn(TPFAIL,iRslt,svcinfo->data,svcinfo->len,0);
}; // DELIVERY

//=====
// Function name: SQLInit
//
// Set global dbproc and spid.
//
// Result:
//     FALSE - database open, dbproc valid
//     TRUE - database open failed
//=====
BOOL SQLInit(CHAR * pSvr,CHAR * pDB,CHAR * pUsr,CHAR * pPW,CHAR * pSvc)
{
    char szApp[32];
    char server[256];
    char database[256];
    char user[256];
    char password[256];

```

```

    LOGINREC    *login;

    dbinit();
    // install error and message handlers
    dbmsghandle((DBMSGHANDLE_PROC)msg_handler);
    dberrhandle((DBERRHANDLE_PROC)err_handler);

    dbproc = NULL;
    strcpy(server,pSvr);
    strcpy(database,pDB);
    strcpy(user,pUsr);
    strcpy(password,pPW);
    sprintf(szApp,"%s%ld",pSvc,_getpid());

    login = dblogin();
    if (!*user)
        DBSETLUSER(login,"sa");
    else
        DBSETLUSER(login,user);
    DBSETPWD(login,password);
    DBSETLHOST(login,szApp);
    DBSETLVERSION(login, DBVER60);
// DBSETLPACKET(login,(unsigned short)DEFCLPACKSIZE);

    if ((dbproc = dbopen(login,server)) == NULL)
    {
        userlog("dbopen failed");
        return TRUE;
    };
    // Use the the right database
    dbuse(dbproc,database);
    dbcmd(dbproc,"select @@spid");
    dbsqlexec(dbproc);
    while (dbresults(dbproc) != NO_MORE_RESULTS)
    {
        dbbind(dbproc,1,SMLLBIND,(DBINT) 0,(BYTE *) spid);
        while (dbnextrow(dbproc) != NO_MORE_ROWS)
            ;
    };

    dbcmd(dbproc,"set nocount on");
    dbsqlexec(dbproc);
    while (dbresults(dbproc) != NO_MORE_RESULTS)
    {
        while (dbnextrow(dbproc) != NO_MORE_ROWS)
            ;
    };

    //rollback transaction on abort
    dbcmd(dbproc,"set XACT_ABORT ON");
    dbsqlexec(dbproc);
    while (dbresults(dbproc) != NO_MORE_RESULTS)
    {
        while (dbnextrow(dbproc) != NO_MORE_ROWS)
            ;
    };

    return(FALSE);
}; // SQLInit

```

```

//=====
// FUNCTION: err_handler
//
// Handles DB-Library errors
//
// ARGUMENTS:
//   DBPROCESS *dbproc    DBPROCESS id pointer
//   int        severity  severity of error
//   int        dberr     error id
//   int        oserr     operating system specific error code
//   char      *dberrstr  printable error description of dberr
//   char      *oserrstr  printable error description of oserr
//
// RETURNS:
//   int      INT_CANCEL
//
// COMMENTS:  None
//=====

int err_handler(DBPROCESS *dbproc, int severity, int dberr, int oserr,
char *dberrstr, char *oserrstr)
{
    if ((dbproc == NULL) || (DBDEAD(dbproc)))
    {
        userlog("ErrHandler: DBPROC is invalid");
        return INT_CANCEL;
    };
    if (bFailed)
        return INT_CANCEL;
    if (oserr != DBOERR)
    {
        sprintf(szWork,"ErrHandler: OSerr(%ld) - %s",oserr,oserrstr);
        userlog(szWork);
        bFailed = TRUE;
    };

    return INT_CANCEL;
}; // err_handler

//=====
// FUNCTION: msg_handler
//
// Handles DB-Library SQL Server error messages
//
// ARGUMENTS:
//   DBPROCESS *dbproc    DBPROCESS id pointer
//   DBINT    msgno      message number
//   int      msgstate   message state
//   int      severity   message severity
//   char      *msgtext   printable message description
//
// RETURNS:  int      INT_CONTINUE  continue operation
//           INT_CANCEL    cancel operation
//
// COMMENTS: This function also sets the dead lock dbproc
//           variable if necessary.
//=====

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int msgstate, int
severity, char *msgtext)
{
    if ((msgno == 5701) || (msgno == 2528) ||
        (msgno == 5703) || (msgno == 6006))
        return INT_CONTINUE;

    // deadlock message
    if (msgno == 1205)
    {
        // set the deadlock indicator
        bDeadlock = TRUE;
        return INT_CONTINUE;
    };

    if (bFailed)
        return INT_CANCEL;

    if (msgno == 0)
        return INT_CONTINUE;
    else
    {
        sprintf(szWork,"MsgHandler: MsgNo(%ld) - %s",msgno,msgtext);
        userlog(szWork);
        bFailed = TRUE;
    };

    return INT_CANCEL;
}; // msg_handler

//=====
// FUNCTION: SQLDelivery
//
// ARGUMENTS:
//   pdd      delivery transaction structure
//   dbdata  (global)
//   bDeadlock (global)
//
// RETURNS:
//   SVC_NOERROR  success
//   !SVC_NOERROR failure
//
// COMMENTS:  None
//=====

int SQLDelivery(DELIVERY_DATA * pdd)
{
    RETCODE rc;
    int i;
    short num_deadlocks = 0;
    int tryit;
    DBDATETIME datetime;
    BYTE * pData;

    bFailed = FALSE;
    bDeadlock = FALSE;
    pdd->iComplete = 0;

    for (tryit=0; tryit < DeadlockRetry; tryit++)
    {
        if (dbrpcinit(dbproc,"tpcc_delivery",0) == SUCCEED)

```

```

{
    dbrpcparam(dbproc,NULL,0,SQLINT2,-1,-1,(BYTE *) &pdd->w_id);
    dbrpcparam(dbproc,NULL,0,SQLINT1,-1,-1,(BYTE *) &pdd-
>o_carrier_id);

    if (dbrpcexec(dbproc) == SUCCEED)
    {
        while (((rc = dbresults(dbproc)) != NO_MORE_RESULTS) && (rc != FAIL))
        {
            while (((rc = dbnextrow(dbproc)) != NO_MORE_ROWS) && (rc != FAIL))
            {
                for (i = 0; i < 10; i++)
                {
                    if(pData = dbdata(dbproc,i + 1))
                        pdd->o_id[i] = *(DBINT *)pData;
                    else
                        pdd->o_id[i] = 0;
                };
            }; // while (dbnextrow)
        }; // while (dbresults)
    }; // if (dbrpcexec)
}; // if (dbrpcinit)
if (bDeadlock)
{
    num_deadlocks++;
    bDeadlock = FALSE;
    userlog("Delivery Deadlock Retry (%d)",num_deadlocks);
    Sleep(10 * tryit);
}
else
{
    GetLocalTime(&pdd->EndTime);
    pdd->iComplete = 1;
    strcpy(pdd->execution_status,"Transaction committed.");
    return(SVC_NOERROR);
};
} // for (tryit)

// If we reached here, it means we quit after MAX_RETRY deadlocks
strcpy(pdd->execution_status,"Hit deadlock max.");
userlog("Delivery Deadlock Failure (%d)",num_deadlocks);
return(SVCERR_DEADLOCK);
}; // SQLDelivery
//=====================================================================
// FUNCTION: WriteLog
//
//     Writes the delivery results to a log file.
//
// ARGUMENTS:
//     pDelivery    delivery information.
//
// RETURNS:
//
// COMMENTS:
//     Record format:
//         QTime,EndTime,Elapsed,w_id,o_carrier_id,o_id1, ... o_id10
//=====================================================================
void WriteLog(DELIVERY_DATA * pdd)
{
    int elapsed = 9999999;
    if (pdd->iComplete)
        CalculateElapsed(&elapsed,&pdd->QTime,&pdd->EndTime);
    fprintf(fpLog,
        "%2.2d/%2.2d/%2.2d,%2.2d:%2.2d:%2.2d:%3.3d,%2.2d:%2.2d:%2.2d:%3.3d,"
        "%d,%d,%d,%d,%d,%d,%d,%d,%d,%d\r\n",
        pdd->EndTime.wYear - 1900,pdd->EndTime.wMonth,pdd->EndTime.wDay,
        pdd->QTime.wHour,pdd->QTime.wMinute,
        pdd->QTime.wSecond,pdd->QTime.wMilliseconds,
        pdd->EndTime.wHour,pdd->EndTime.wMinute,
        pdd->EndTime.wSecond,pdd->EndTime.wMilliseconds,
        elapsed,pdd->w_id,pdd->o_carrier_id,
        pdd->o_id[0],pdd->o_id[1],pdd->o_id[2],pdd->o_id[3],pdd->o_id[4],
        pdd->o_id[5],pdd->o_id[6],pdd->o_id[7],pdd->o_id[8],pdd->o_id[9]);
        if (bFlush)
            fflush(fpLog);
}; // WriteLog
//=====================================================================
// FUNCTION: OpenLogFile
//
//     Opens the delivery log file.
//
// ARGUMENTS:
//     None.
//
// RETURNS:
//     FALSE      Log file successfully opened
//     TRUE       Failed to open log file
//
// COMMENTS:
//
////=====================================================================
BOOL OpenLogFile(void)
{
    sprintf(szLogTitle,"%s%ld",LOGFILE_NAME,iServerNo);
    fpLog = fopen(szLogTitle,"ab");
    if (!fpLog)
    {
        sprintf(szWork,"LogFile %s Open Failed (%ld)",
               szLogTitle,GetLastError());
        userlog(szWork);
        return(TRUE);
    };
    return(FALSE);
}; // OpenLogFile
//=====================================================================
// FUNCTION: CalculateElapsed
//
//     Calculates the elapsed time of the delivery transaction.
//
// ARGUMENTS:
//     lpBegin    time delivery was queued
//     lpEnd        time delivery update completed
//
// RETURNS:
//     int          pElapsed elapsed time result (in milliseconds)

```

```

// COMMENTS:
// None
//
//=====
void CalculateElapsed(int * pElapsed, LPSYSTEMTIME lpBegin,
                      LPSYSTEMTIME lpEnd)
{
    int tmBegin;
    int tmEnd;

    tmBegin = (lpBegin->wHour * 3600000) + (lpBegin->wMinute * 60000) +
              (lpBegin->wSecond * 1000) + lpBegin->wMilliseconds;
    tmEnd = (lpEnd->wHour * 3600000) + (lpEnd->wMinute * 60000) +
            (lpEnd->wSecond * 1000) + lpEnd->wMilliseconds;
    *pElapsed = tmEnd - tmBegin;

    // Check for day boundary, this will function for 24 hour period but
    // will fail over a 48 hours period.
    if (*pElapsed < 0)
        *pElapsed = *pElapsed + (24 * 60 * 60 * 1000);
    return;
} // CalculateElapsed

//=====
// FUNCTION: UtilStrCpy
//
// Copies n characters from string pSrc to pDst and places a null
// null character at the end of the destination string.
//
// ARGUMENTS:
//     char      *pDest    destination string pointer
//     char      *pSrc     source string pointer
//     int       n         number of characters to copy
//
// RETURNS:      None
//
// COMMENTS:
//     Unlike strcpy this function ensures that the result string is
//     always null terminated.
//=====

void UtilStrCpy(char * pDest, char * pSrc, int n)
{
    strncpy(pDest, pSrc, n);
    pDest[n] = '\0';
    return;
} // UtilStrCpy

//=====
// Function name: GetArgs
//
//=====
void GetArgs(INT argc, CHAR **argv)
{
    INT j;
    CHAR * ptr;
    BOOL bRslt = TRUE;

    for (j = 1; j < argc; ++j)

```

```

    {
        ptr = argv[j];
        switch (ptr[1])
        {
            case 's':
            case 'S':
                strcpy(szServer,ptr+2);
                break;

            case 'd':
            case 'D':
                strcpy(szDatabase,ptr+2);
                break;

            case 'F':
            case 'f':
                bFlush = TRUE;      //turn on delilog flush when written.
                break;
        }
    } // for (j = 1; j < argc; ++j)
} // GetArgs

```

## DELIVERY REPORT MAKEFILE

```

# Microsoft Developer Studio Generated NMAKE File, Format Version 4.20
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Console Application" 0x0103

!IF "$(CFG)" == ""
CFG=delirpt - Win32 Debug
!MESSAGE No configuration specified. Defaulting to delirpt - Win32 Debug.
!ENDIF

!IF "$(CFG)" != "delirpt - Win32 Release" && "$(CFG)" != \
"delirpt - Win32 Debug"
!MESSAGE Invalid configuration "$(CFG)" specified.
!MESSAGE You can specify a configuration when running NMAKE on this
makefile
!MESSAGE by defining the macro CFG on the command line. For example:
!MESSAGE
!MESSAGE NMAKE /f "delirpt.mak" CFG="delirpt - Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "delirpt - Win32 Release" (based on "Win32 (x86) Console
Application")
!MESSAGE "delirpt - Win32 Debug" (based on "Win32 (x86) Console
Application")
!MESSAGE
!ERROR An invalid configuration is specified.
!ENDIF

!IF "$(OS)" == "Windows_NT"
NULL=
!ELSE
NULL=nul
!ENDIF

```

```

#####
## Begin Project
CPP=cl.exe
RSC=rc.exe

!IF  "$(CFG)" == "delirpt - Win32 Release"
    $(LINK32_FLAGS)  $(LINK32_OBJS)
<<

!ELSEIF  "$(CFG)" == "delirpt - Win32 Debug"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "delirpt_"
# PROP BASE Intermediate_Dir "delirpt_"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir "delirpt_"
# PROP Intermediate_Dir "delirpt_"
# PROP Target_Dir ""
OUTDIR=.\\delirpt_
INTDIR=.\\delirpt_

ALL : "$(OUTDIR)\delirpt.exe"

CLEAN :
    -@erase "$(INTDIR)\DELIRPT.OBJ"
    -@erase "$(OUTDIR)\delirpt.exe"

"$(OUTDIR)" :
    if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR)"

# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_CONSOLE"
/YX /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_CONSOLE" /YX /c
CPP_PROJ=/nologo /ML /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_CONSOLE"\ /Fp"$(INTDIR)/delirpt.pch" /YX /Fo"$(INTDIR)://" /c
CPP_OBJS=.\\delirpt_/
CPP_SRCS=.\
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$(OUTDIR)/delirpt.bsc"
BSC32_SRCS= \
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbc32.lib /nologo /subsystem:console /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:console /machine:I386
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib\ \
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib\ \
odbc32.lib /nologo /subsystem:console /incremental:no\ \
/pdb:"$(OUTDIR)/delirpt.pdb" /machine:I386 /out:"$(OUTDIR)/delirpt.exe"
LINK32_OBJS= \
    "$(INTDIR)\DELIRPT.OBJ"

"$(OUTDIR)\delirpt.exe" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<

$ (LINK32_FLAGS)  $(LINK32_OBJS)
<<

!ELSEIF  "$(CFG)" == "delirpt - Win32 Debug"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir "Debug"
# PROP Intermediate_Dir "Debug"
# PROP Target_Dir ""
OUTDIR=.\\Debug
INTDIR=.\\Debug

ALL : "$(OUTDIR)\delirpt.exe"

CLEAN :
    -@erase "$(INTDIR)\DELIRPT.OBJ"
    -@erase "$(INTDIR)\vc40.idb"
    -@erase "$(INTDIR)\vc40.pdb"
    -@erase "$(OUTDIR)\delirpt.exe"
    -@erase "$(OUTDIR)\delirpt.ilk"
    -@erase "$(OUTDIR)\delirpt.pdb"

"$(OUTDIR)" :
    if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR)"

# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
"_CONSOLE" /YX /c
# ADD CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_CONSOLE"
/YX /c
CPP_PROJ=/nologo /MLd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D
"_CONSOLE"\ /Fp"$(INTDIR)/delirpt.pch" /YX /Fo"$(INTDIR)://" /Fd"$(INTDIR)://" /c
CPP_OBJS=.\\Debug/
CPP_SRCS=.\
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
BSC32_FLAGS=/nologo /o"$(OUTDIR)/delirpt.bsc"
BSC32_SRCS= \
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib
odbc32.lib odbc32.lib /nologo /subsystem:console /debug /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:console /debug /machine:I386
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib\ \
advapi32.lib shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib\ \
odbc32.lib /nologo /subsystem:console /incremental:yes\ \
/pdb:"$(OUTDIR)/delirpt.pdb" /debug /machine:I386
/out:"$(OUTDIR)/delirpt.exe"
LINK32_OBJS= \

```

```

"$(INTDIR)\DELIRPT.OBJ"

"$(OUTDIR)\delirpt.exe" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ENDIF

.c{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.cxx{$(CPP_OBJS)}.obj:
    $(CPP) $(CPP_PROJ) $<

.c{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cpp{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

.cxx{$(CPP_SBRS)}.sbr:
    $(CPP) $(CPP_PROJ) $<

#####
## Begin Target

# Name "delirpt - Win32 Release"
# Name "delirpt - Win32 Debug"

!IF  "$(CFG)" == "delirpt - Win32 Release"
!ELSEIF "$(CFG)" == "delirpt - Win32 Debug"
!ENDIF

#####
## Begin Source File

SOURCE=.\\DELIRPT.C

"$(INTDIR)\DELIRPT.OBJ" : $(SOURCE) "$(INTDIR)"

#
# End Source File
# End Target
# End Project
#####


```

## delirpt.c

```

/*      FILE:          DELIRPT.C
*               Microsoft TPC-C Kit Ver. 3.00.000
*
```

```

*                                         Copyright Microsoft, 1996
*
* PURPOSE:          Delivery report processing application
* Author:           Philip Durr
*                   philipdu@Microsoft.com
*/
#include <windows.h>
#include <stdio.h>
#include <stdlib.h>

#define LOGFILE_READ_EOF      0
//check log file flag return current state
#define LOGFILE_CLEAR_EOF     1
//clear end of log file flag
#define LOGFILE_SET_EOF       2
//set flag end of log file reached

#define INTERVAL              .01
//90th percentile calculation bucket
interval

#define ERR_SUCCESS            1000
//success no error
#define ERR_READING_LOGFILE   1001
//io errors occured reading delivery log file
#define ERR_INSUFFICIENT_MEMORY 1002
//insufficient memory to process 90th percentile report
#define ERR_CANNOT_OPEN_RESULTS_FILE 1005
//Cannot open delivery results file delilog.

typedef struct _RPTLINE
{
    SYSTEMTIME start;
//delilog report line start time
    SYSTEMTIME end;
//delilog report line end time
    int response;
//delilog report line time delivery
    took in milliseconds
    int w_id;
//delilog report line warehouse id
    for delivery
    int o_carrier_id;
//delilog report line carier id for delivery
    int items[10];
//delilog report line delivery line
    items
} RPTLINE, *PRPTLINE;

//error message structure used in ErrorMessage API
typedef struct _SERRORMSG
{
    int iError;
//error id of message
    char szMsg[80];
//message to sent to browser
} SERRORMSG;

int versionMS = 4;
//delirpt version
int versionMM = 0;
int versionLS = 0;
```

```

int          iReport;
int          //delirpt report to process
int          iStartTime;
int          //begin times to accept for report
int          iEndTime;
FILE         *fpLog;
//log file stream
CHAR szLogFileTitle[100];
#define DEFAULTLOGTITLE "delilog."

//Local function prototypes
void         main(int argc, char *argv[]);
static int   Init(void);
static void   Restore(void);
static int   DoReport(void);
int          AverageResponse(void);
int          SkippedDelivery(void);
int          Percentile90th(void);
BOOL         CheckTimes(PRPTLINE pRptLine);
static int   OpenLogFile(void);
static void   CloseLogFile(void);
static void   ResetLogFile(void);
static BOOL   LogEOF(int iOperation);
static BOOL   ReadReportLine(char *szBuffer, PRPTLINE pRptLine);
static BOOL   ParseReportLine(char *szLine, PRPTLINE pRptLine);
static BOOL   ParseDate(char *szDate, LPSYSTEMTIME pTime);
static BOOL   ParseTime(char *szTime, LPSYSTEMTIME pTime);
static void   ErrorMessage(int iError);
static BOOL   GetParameters(int argc, char *argv[]);
static void   PrintParameters(void);
static void   PrintHeader(void);
static void   cls(void);
static BOOL   IsNumeric(char *ptr);

/* FUNCTION: int main(int argc, char *argv[])
 *
 * PURPOSE: This function is the beginning execution point for the
delivery executable.
 *
 * ARGUMENTS: int      argc    number of command line arguments
passed to delivery
 *           char    *argv[] array of command line
argument pointers
 *
 * RETURNS:     None
 *
 * COMMENTS:   None
 *
 */

void main(int argc, char *argv[])
{
    int      iError;

    PrintHeader();

    if ( GetParameters(argc, argv) )
    {
        PrintParameters();
    }
}

return;
}

if ( (iError=Init()) != ERR_SUCCESS )
{
    ErrorMessage(iError);
    Restore();
    return;
}

if ( (iError = DoReport()) != ERR_SUCCESS )
    ErrorMessage(iError);

Restore();

return;
}

/* FUNCTION: static int Init(void)
 *
 * PURPOSE: This function initializes the delirpt application.
 *
 * ARGUMENTS: None
 *
 * RETURNS:     None
 *
 * COMMENTS:   None
 *
 */

static int Init(void)
{
    int iError;

    if ( (iError = OpenLogFile()) )
        return iError;
    return TRUE;
}

/* FUNCTION: static void Restore(void)
 *
 * PURPOSE: This function cleans up the delirpt application before
termination.
 *
 * ARGUMENTS: None
 *
 * RETURNS:     None
 *
 * COMMENTS:   None
 *
 */

static void Restore(void)
{
    CloseLogFile();
    return;
}

/* FUNCTION: static int DoReport(void)
 *
 * PURPOSE: This function dispatches the requested report.
 */

```

```

/*
 * ARGUMENTS: None
 *
 * RETURNS:      ERR_SUCCESS if successfull or error code if an
error occurs.
 *
 * COMMENTS:    None
 *
 */
static int DoReport(void)
{
    int iRc;

    switch(iReport)
    {
        case 1:
            iRc = AverageResponse();
            break;
        case 2:
            iRc = Percentile90th();
            break;
        case 3:
            iRc = SkippedDelivery();
            break;
        case 4:
            if ( (iRc = AverageResponse()) != ERR_SUCCESS )
                break;
            if ( (iRc = Percentile90th()) != ERR_SUCCESS )
                break;
            if ( (iRc = SkippedDelivery()) != ERR_SUCCESS )
                break;
            break;
    }
    return iRc;
}

/* FUNCTION: int AverageResponse(void)
 *
 * PURPOSE:      This function processes the AverageResponse report.
 *
 * ARGUMENTS:    None
 *
 * RETURNS:      ERR_SUCCESS if successfull or error code if an
error occurs.
 *
 * COMMENTS:    None
 */
int AverageResponse(void)
{
    RPTLINE reportLine;
    int          iTotalResponse;
    int          iLines;
    double       fAverage;
    char         szDelivery[128];

    ResetLogFile();
    iTotalResponse = 0;
}

```

```

iLines = 0;
printf("\n\n***** Average Response Time Report *****\n");
while ( !LogEOF(LOGFILE_READ_EOF) )
{
    if ( ReadReportLine(szDelivery, &reportLine) )
        return ERR_READING_LOGFILE;
    if ( !LogEOF(LOGFILE_READ_EOF) )
    {
        if ( CheckTimes(&reportLine) )
            continue;
        iLines++;
        iTotalResponse += reportLine.response;

        if ( iLines % 10 == 0 )
            printf("Reading Report Line:\t%d\r",
iLines);
    }
    printf("
if ( iLines == 0 )
{
    printf("No deliveries found.\n");
}
else
{
    fAverage = ((double)iTotalResponse /
(double)iLines)/(double)1000;
    printf("Total Deliveries:    %10.0f\n", (float)iLines);
    printf("Total Response Times: %10.3f\n",
((float)iTotalResponse/(float)1000));
    printf("Average Response Time: %10.3f\n", fAverage);
}
return ERR_SUCCESS;
}

/* FUNCTION: int Percentile90th(void)
 *
 * PURPOSE:      This function processes the 90th percentile report.
 *
 * ARGUMENTS:    None
 *
 * RETURNS:      ERR_SUCCESS if successfull or error code if an
error occurs.
 *
 * COMMENTS:    This function requires enough space to allocate needed
buckets which will be 2 * max response time
in
*
deciseconds.
*/
int Percentile90th(void)
{
    RPTLINE reportLine;
    int          iBucketSize;
    int          i;
    int          iResponseSeconds;
    int          iMaxSeconds;
    int          iTotalBuckets;
    double       iTotal;
}

```

```

double i90thPercent;
short *psBuckets;
char szDelivery[128];

printf("\n\n***** 90th Percentile *****\n");
printf("Calculating Max Response Seconds...\n");

ResetLogFile();

iMaxSeconds = -1;
while ( !LogEOF(LOGFILE_READ_EOF) )
{
    if ( ReadReportLine(szDelivery, &reportLine) )
        return ERR_READING_LOGFILE;
    if ( szDelivery[0] == '*' )
        continue;
    if ( !LogEOF(LOGFILE_READ_EOF) )
    {
        if ( iMaxSeconds < reportLine.response )
            iMaxSeconds = reportLine.response;
    }
}

iTTotalBuckets = iMaxSeconds + 1;

printf("Allocating Buckets...\n");

iBucketSize = iTTotalBuckets * sizeof(short);

if ( !(psBuckets = (short *)malloc(iBucketSize)) )
    return ERR_INSUFFICIENT_MEMORY;

ZeroMemory(psBuckets, iBucketSize);

iTTotal = 0;

ResetLogFile();
printf("Calculating Distribution...\n");

iMaxSeconds = -1;
while ( !LogEOF(LOGFILE_READ_EOF) )
{
    if ( ReadReportLine(szDelivery, &reportLine) )
        return ERR_READING_LOGFILE;
    if ( szDelivery[0] == '*' )
        continue;
    if ( !LogEOF(LOGFILE_READ_EOF) )
    {
        if ( CheckTimes(&reportLine) )
            continue;
        psBuckets[reportLine.response]++;
        iTTotal++;
        if ( iMaxSeconds < reportLine.response )
            iMaxSeconds = reportLine.response;
    }
}

printf("Max Response Time = %d.%d\n",
(iMaxSeconds / 1000), (iMaxSeconds % 1000));

i90thPercent = iTTotal * .9;

```

```

for(i=0, iTTotal = 0.0; iTTotal < i90thPercent; iTTotal +=
(double)psBuckets[i] )
    i++;

printf("90th Percentile = %d.%d\n", i/1000, (i % 1000));

free(psBuckets);

return ERR_SUCCESS;
}

/* FUNCTION: int SkippedDelivery(void)
 *
 * PURPOSE: This function processes the Skipped Deliveries
 * report.
 *
 * ARGUMENTS: None
 *
 * RETURNS: ERR_SUCCESS if successfull or error code if an
 * error occurs.
 *
 * COMMENTS: None
 */
int SkippedDelivery(void)
{
    RPTLINE reportLine;
    char szDelivery[128];
    int i;
    int items[10];

    ResetLogFile();

    printf("\n\n***** Skipped Delivery Report *****\n");
    memset(items, 0, sizeof(items));
    printf("Reading Delivery Log File...\n");

    while ( !LogEOF(LOGFILE_READ_EOF) )
    {
        if ( ReadReportLine(szDelivery, &reportLine) )
            return ERR_READING_LOGFILE;
        if ( !LogEOF(LOGFILE_READ_EOF) )
        {
            if ( CheckTimes(&reportLine) )
                continue;
            for(i=0; i<10; i++)
            {
                if ( !reportLine.items[i] )
                    items[i]++;
            }
        }
        printf("\n");
        printf("Skipped delivery table.\n");
        printf(" 1   2   3   4   5   6   7   8   9   10 \n");
        printf("-----\n");
        for(i=0; i<10; i++)
            printf("%4.4d ", items[i]);
        printf("\n");
    }
}

```

```

        return ERR_SUCCESS;
    }

/* FUNCTION: BOOL CheckTimes(PRPTLINE pRptLine)
*
* PURPOSE: This function checks to see if the delilog record falls
within the
begin and end time from the command line.
*
* ARGUMENTS: PRPTLINE      pRptLine      delilog processed report
line.
*
* RETURNS:          BOOL      FALSE   if report line is not within the
requested
start and end times.                                TRUE     if the report line is
within the
                                         requested
start and end times.
*
* COMMENTS: If startTime and endTime are both 0 then the user requested
the default behavior which is all records in
delilog are
                                         valid.
*/
BOOL CheckTimes(PRPTLINE pRptLine)
{
    int      iRptEndTime;
    int      iRptStartTime;

    iRptStartTime = (pRptLine->start.wHour * 3600000) + (pRptLine-
>start.wMinute * 60000) + (pRptLine->start.wSecond * 1000) + pRptLine-
>start.wMilliseconds;
    iRptEndTime = (pRptLine->end.wHour * 3600000) + (pRptLine-
>end.wMinute * 60000) + (pRptLine->end.wSecond * 1000) + pRptLine-
>end.wMilliseconds;

    if ( iStartTime == 0 && iEndTime == 0 )
        return FALSE;

    if ( iStartTime <= iRptStartTime && iEndTime >= iRptEndTime )
        return FALSE;

    return TRUE;
}

/* FUNCTION: int OpenLogFile(void)
*
* PURPOSE: This function opens the delivery log file for use.
*
* ARGUMENTS: None
*
* RETURNS:          int      ERR_CANNOT_OPEN_RESULTS_FILE  Cannot create
results log file.
                                         ERR_SUCCESS
                                         Log file successfully opened
*
*
* COMMENTS: None

```

```

/*
 */

static int OpenLogFile(void)
{
    fpLog = fopen(szLogFileTitle, "rb");

    if ( !fpLog )
        return ERR_CANNOT_OPEN_RESULTS_FILE;

    return ERR_SUCCESS;
}

/* FUNCTION: int CloseLogFile(void)
*
* PURPOSE: This function closes the delivery log file.
*
* ARGUMENTS: None
*
* RETURNS: None
*
* COMMENTS: None
*/
static void CloseLogFile(void)
{
    if ( fpLog )
        fclose(fpLog);

    return;
}

/* FUNCTION: static void ResetLogFile(void)
*
* PURPOSE: This function prepares the delilog. file for reading
*
* ARGUMENTS: None
*
* RETURNS: None
*
* COMMENTS: None
*/
static void ResetLogFile(void)
{
    fseek(fpLog, 0L, SEEK_SET);
    LogEOF(LOGFILE_CLEAR_EOF);

    return;
}

/* FUNCTION: static BOOL LogEOF(int iOperation)
*
* PURPOSE: This function tracks and reports the end of file condition
on the delilog file.
*
* ARGUMENTS: int iOperation requested operation this can be:

```

```

/*
 *      LOGFILE_READ_EOF      check log file flag return current state
 *
 *      LOGFILE_CLEAR_EOF     clear end of log file flag
 *
 *      LOGFILE_SET_EOF       set flag end of log file reached
 *
 *
 *      * RETURNS:             None
 *
 *      * COMMENTS:            None
 *
 */
static BOOL LogEOF(int iOperation)
{
    static BOOL bEOF;

    switch(iOperation)
    {
        case LOGFILE_READ_EOF:
            return bEOF;
            break;
        case LOGFILE_CLEAR_EOF:
            bEOF = FALSE;
            break;
        case LOGFILE_SET_EOF:
            bEOF = TRUE;
            break;
    }
    return FALSE;
}

/* FUNCTION: static BOOL ReadReportLine(char *szBuffer, PRPTLINE pRptLine)
 *
 * PURPOSE:   This function reads a text line from the delilog file.
 *             on the delilog file.
 *
 * ARGUMENTS: char          *szBuffer      buffer to placed read delilog
file line into.
 *             PRPTLINE      pRptLine      returned
structure containing parsed delilog
 *
 *             report line.
 *
 * RETURNS:      FALSE  if successfull or TRUE if an error occurs.
 *
 * COMMENTS:    None
 */
static BOOL ReadReportLine(char *szBuffer, PRPTLINE pRptLine)
{
    int i = 0;
    int ch;
    int iEof;

    while( i < 128 )
    {
        ch = fgetc(fpLog);
        if ( iEof = feof(fpLog) )
            break;
        if ( ch == '\r' )
        {
            if ( i )
                break;
            continue;
        }
        if ( ch == '\n' )
            continue;
        szBuffer[i++] = ch;
    }

    //delivery item format is to long cannot be a valid delivery item
    if ( i >= 128 )
        return TRUE;

    szBuffer[i] = 0;
    if ( iEof )
    {
        LogEOF(LOGFILE_SET_EOF);
        if ( i == 0 )
            return FALSE;
    }
    return ParseReportLine(szBuffer, pRptLine);
}

/* FUNCTION: static BOOL ParseReportLine(char *szLine, PRPTLINE pRptLine)
 *
 * PURPOSE:   This function reads a text line from the delilog file.
 *             on the delilog file.
 *
 * ARGUMENTS: char          *szLine       buffer containing the delilog
file line to be parsed.
 *             PRPTLINE      pRptLine      returned
structure containing parsed delilog
 *
 *             report line values.
 *
 * RETURNS:      FALSE  if successfull or TRUE if an error occurs.
 *
 * COMMENTS:    None
 */
static BOOL ParseReportLine(char *szLine, PRPTLINE pRptLine)
{
    int i;

    if ( ParseDate(szLine, &pRptLine->start) )
        return TRUE;

    pRptLine->end.wYear = pRptLine->start.wYear;
    pRptLine->end.wMonth = pRptLine->start.wMonth;
    pRptLine->end.wDay = pRptLine->start.wDay;

    if ( !(szLine = strchr(szLine, ',')) )
        return TRUE;
    szLine++;

    if ( ParseTime(szLine, &pRptLine->start) )

```

```

        return TRUE;

if ( !(szLine = strchr(szLine, ',')) )
    return TRUE;
szLine++;

if ( ParseTime(szLine, &pRptLine->end) )
    return TRUE;

if ( !(szLine = strchr(szLine, ',')) )
    return TRUE;
szLine++;

if ( !IsNumeric(szLine) )
    return TRUE;
pRptLine->response = atoi(szLine);

if ( !(szLine = strchr(szLine, ',')) )
    return TRUE;
szLine++;

if ( !IsNumeric(szLine) )
    return TRUE;
pRptLine->w_id = atoi(szLine);

if ( !(szLine = strchr(szLine, ',')) )
    return TRUE;
szLine++;

if ( !IsNumeric(szLine) )
    return TRUE;
pRptLine->o_carrier_id = atoi(szLine);

if ( !(szLine = strchr(szLine, ',')) )
    return TRUE;
szLine++;

for(i=0; i<10; i++)
{
    if ( !IsNumeric(szLine) )
        return TRUE;
    pRptLine->items[i] = atoi(szLine);

    if ( i<9 && !(szLine = strchr(szLine, ',')) )
        return TRUE;
    szLine++;
}

return FALSE;
}

/* FUNCTION: static BOOL ParseDate(char *szDate, LPSYSTEMTIME pTime)
*
* PURPOSE: This function validates and extracts a date string in the
format
*
*             yy/mm/dd into an SYSTEMTIME structure.
*
* ARGUMENTS: char          *szDate      buffer containing the
date to be parsed.
*           LPSYSTEMTIME  pTime      system time
structure where date will be placed.
*/
* RETURNS:          FALSE if successfull or TRUE if an error occurs.
*
* COMMENTS:  None
*/
static BOOL ParseDate(char *szDate, LPSYSTEMTIME pTime)
{
    if ( !isdigit(*szDate) || !isdigit(*(szDate+1)) || *(szDate+2) != '/'
|| !isdigit(*(szDate+3)) || !isdigit(*(szDate+4)) ||
*(szDate+5) != '/' || !isdigit(*(szDate+6)) || !isdigit(*(szDate+7)) )
        return TRUE;

    pTime->wYear = atoi(szDate);
    pTime->wMonth = atoi(szDate+3);
    pTime->wDay = atoi(szDate+6);

    if ( pTime->wMonth > 12 || pTime->wMonth < 0 || pTime->wDay > 31
|| pTime->wDay < 0 )
        return TRUE;

    return FALSE;
}

/* FUNCTION: static BOOL ParseTime(char *szTime, LPSYSTEMTIME pTime)
*
* PURPOSE:  This function validates and extracts a time string in the
format
*
*             hh:mm:ss:mmm into an SYSTEMTIME structure.
*
* ARGUMENTS: char          *szTime      buffer containing the
time to be parsed.
*           LPSYSTEMTIME  pTime      system time
structure where date will be placed.
*
* RETURNS:          FALSE if successfull or TRUE if an error occurs.
*
* COMMENTS:  None
*/
static BOOL ParseTime(char *szTime, LPSYSTEMTIME pTime)
{
    if ( !isdigit(*szTime) || !isdigit(*(szTime+1)) || *(szTime+2) != ':'
|| !isdigit(*(szTime+3)) || !isdigit(*(szTime+4)) ||
*(szTime+5) != ':' || !isdigit(*(szTime+6)) || !isdigit(*(szTime+7)) ||
*(szTime+8) != ':' || !isdigit(*(szTime+9)) || !isdigit(*(szTime+10)) ||
!isdigit(*(szTime+11)) )
        return TRUE;

    pTime->wHour = atoi(szTime);
    pTime->wMinute = atoi(szTime+3);
    pTime->wSecond = atoi(szTime+6);
}

```

```

pTime->wMilliseconds = atoi(szTime+9);

if ( pTime->wHour > 23 || pTime->wHour < 0 ||
     pTime->wMinute > 59 || pTime->wMinute < 0 ||
     pTime->wSecond > 59 || pTime->wSecond < 0 ||
     pTime->wMilliseconds < 0 )
    return TRUE;

if ( pTime->wMilliseconds > 999 )
{
    pTime->wSecond += (pTime->wMilliseconds/1000);
    pTime->wMilliseconds = pTime->wMilliseconds % 1000;
}

return FALSE;
}

/* FUNCTION: void ErrorMessage(int iError)
 *
 * PURPOSE: This function displays an error message in the delivery
executable's console window.
*
* ARGUMENTS: int          iError      error id to be displayed
*
* RETURNS:      None
*
* COMMENTS:    None
*
*/
static void ErrorMessage(int iError)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        {      ERR_SUCCESS,
              "Success, no error." },
        {      ERR_CANNOT_OPEN_RESULTS_FILE,
              "Cannot open delivery results log file." },
        {      ERR_READING_LOGFILE,
              "Reading delivery log file, Delivery item format incorrect." },
        {      ERR_INSUFFICIENT_MEMORY,
              "insufficient memory to process 90th percentile report." },
        {      0,
              "" }
    };

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( iError == errorMsgs[i].iError )
        {
            printf("\nError(%d): %s\n", iError,
errorMsgs[i].szMsg);
            return;
        }
    }
}

```

```

        }

        printf("Error(%d): %s", errorMsgs[0].szMsg);
        return;
    }

/* FUNCTION: BOOL GetParameters(int argc, char *argv[])
 *
 * PURPOSE: This function parses the command line passed in to the
delivery executable, initializing
*                               and filling in global variable parameters.
*
* ARGUMENTS: int          argc      number of command line arguments
passed to delivery
*           char      *argv[] array of command line
argument pointers
*
* RETURNS:      BOOL      FALSE   parameter read successfull
*                           TRUE    user has requested
parameter information screen be displayed.
*
* COMMENTS:    None
*
*/
static BOOL GetParameters(int argc, char *argv[])
{
    int             i;
    SYSTEMTIME      startTime;
    SYSTEMTIME      endTime;
    UINT uLogTitleLen;

    iStartTime = 0;
    iEndTime = 0;
    iReport = 4;
    strcpy(szLogFileTitle,DEFAULTLOGTITLE);

    for(i=0; i<argc; i++)
    {
        if ( argv[i][0] == '-' || argv[i][0] == '/' )
        {
            switch(argv[i][1])
            {
                case 'S':
                case 's':
                    if ( ParseTime(argv[i]+2,
&startTime) )
                        return TRUE;
                    iStartTime = (startTime.wHour *
3600000) + (startTime.wMinute * 60000) + (startTime.wSecond * 1000) +
startTime.wMilliseconds;
                    break;
                case 'E':
                case 'e':
                    if ( ParseTime(argv[i]+2, &endTime) )
                        return TRUE;
                    iEndTime = (endTime.wHour * 3600000) +
(endTime.wMinute * 60000) + (endTime.wSecond * 1000) +
endTime.wMilliseconds;
                    break;
            }
        }
    }
}

```

```

        case 'R':
        case 'r':
            iReport = atoi(argv[i]+2);
            if ( iReport > 4 || iReport < 1 )
                iReport = 4;
            break;
        case 'F':
        case 'f':
            uLogTitleLen = strlen(argv[i] - 2);
            if (uLogTitleLen > 0 && uLogTitleLen <
sizeof(szLogFileTitle))
            {
                strcpy(szLogFileTitle,argv[i]+2);
                printf("Log File Title set to %s",szLogFileTitle);
            }
            break;
        case '?':
            return TRUE;
        }
    }
    return FALSE;
}

/* FUNCTION: void PrintParameters(void)
*
* PURPOSE: This function displays the supported command line flags.
*
* ARGUMENTS: None
*
* RETURNS: None
*
* COMMENTS: None
*/
static void PrintParameters(void)
{
    PrintHeader();
    printf("DELRPT:\n\n");
    printf("Parameter
Default\n");
    printf("-----\n");
    printf("-S Start Time HH:MM:SS:MMM
All \n");
    printf("-E End Time HH:MM:SS:MMM
All \n");
    printf("-R 1)Average Response, 2)90th 3) Skipped 4) All
All \n");
    printf("-? This help screen\n\n");
    printf("Note: Command line switches are NOT case sensitive.\n");

    return;
}

/* FUNCTION: void PrintHeader(void)
*
* PURPOSE: This function displays the delivery report applications
banner information.
*/

```

```

* ARGUMENTS: None
*
* RETURNS: None
*
* COMMENTS: None
*/
static void PrintHeader(void)
{
    //cls();

    printf("*****\n");
    printf("* Microsoft SQL Server 7.0\n");
    printf("* HTML TPC-C BENCHMARK KIT: Delivery Report\n");
    printf("* Version %d.%2d.%3.3d\n");
    *\\n", versionMS, versionMM, versionLS);
    printf("*\n");
    printf("*****\n\\n");

    return;
}

/* FUNCTION: void cls(void)
*
* PURPOSE: This function clears the console window
*
* ARGUMENTS: None
*
* RETURNS: None
*
* COMMENTS: None
*/
static void cls(void)
{
    HANDLE hConsole;
    COORD coordScreen = { 0, 0 };                                //here's where
we'll home the cursor
    DWORD cCharsWritten;
    CONSOLE_SCREEN_BUFFER_INFO csbi;                            //to get buffer info
    DWORD dwConSize;                                         dwConSize;
    //number of character cells in the current buffer

    hConsole = GetStdHandle(STD_OUTPUT_HANDLE);

    //get the number of character cells in the current buffer

    GetConsoleScreenBufferInfo( hConsole, &csbi );
    dwConSize = csbi.dwSize.X * csbi.dwSize.Y;

    //fill the entire screen with blanks
    FillConsoleOutputCharacter( hConsole, (TCHAR) ' ', dwConSize,
coordScreen, &cCharsWritten );
    GetConsoleScreenBufferInfo( hConsole, &csbi );

    //now set the buffer's attributes accordingly

```

```

        FillConsoleOutputAttribute( hConsole, csbi.wAttributes,dwConSize,
coordScreen, &cCharsWritten );

        //put the cursor at (0, 0)
        SetConsoleCursorPosition( hConsole, coordScreen );

        return;
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
*
* PURPOSE: This function determines if a string is numeric. It fails
if any characters other
*             than numeric and null terminator are present.
*
* ARGUMENTS: char           *ptr      pointer to string to check.
*
* RETURNS:          BOOL    FALSE   if string is not all numeric
*                   TRUE    if string contains
only numeric characters i.e. '0' - '9'
*
* COMMENTS: A comma is counted as a valid delimiter.
*
*/
static BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    if ( !*ptr || *ptr == ',' )
        return TRUE;
    else
        return FALSE;
}

```



## Appendix B - Database Design

### Build Scripts

#### BACKUP.SQL

```
-- File:      BACKUP.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates backup of tpcc database

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

backup database tpcc to tpccback1, tpccback2 with init, stats = 5
select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go
```

#### CREATEDB.SQL

```
-- File:      CREATEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates tpcc database and backup files
--           for 1530 warehouses.

use master
go

-- remove any existing database and backup files

exec sp_dbremove tpcc, dropdev
exec sp_dropdevice 'tpccback1', delfile
exec sp_dropdevice 'tpccback2', delfile
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

-- create main database files

create database tpcc on
    (name="MSSQL70_tpcc_root",filename="C:\MSSQL7\Data\tpcc_root.mdf",
size=10MB, FILEGROWTH=0)
log on
    (name="MSSQL70_tpcc_log",filename="L:",size=47500MB, FILEGROWTH=0)
```

```
-- create filegroups

alter database tpcc add filegroup MSSQL70_misc_fg
alter database tpcc add filegroup MSSQL70_cs_fg

-- add files to filegroups

alter database tpcc add file
    (name="MSSQL70_msc1",filename="M:",size=8800MB, FILEGROWTH=0),
    (name="MSSQL70_msc2",filename="N:",size=8800MB, FILEGROWTH=0),
    (name="MSSQL70_msc3",filename="O:",size=8800MB, FILEGROWTH=0),
    (name="MSSQL70_msc4",filename="P:",size=8800MB, FILEGROWTH=0),
    (name="MSSQL70_msc5",filename="Q:",size=8800MB, FILEGROWTH=0)
to filegroup MSSQL70_misc_fg

alter database tpcc add file
    (name="MSSQL70_cs1",filename="E:",size=18400MB, FILEGROWTH=0),
    (name="MSSQL70_cs2",filename="F:",size=18400MB, FILEGROWTH=0),
    (name="MSSQL70_cs3",filename="G:",size=18400MB, FILEGROWTH=0),
    (name="MSSQL70_cs4",filename="H:",size=18400MB, FILEGROWTH=0),
    (name="MSSQL70_cs5",filename="I:",size=18400MB, FILEGROWTH=0)
to filegroup MSSQL70_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
go
```

#### CREATEOPT1.SQL

```
-- File:      DBOPT1.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Sets database options for data load

use master
go

exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
go

use tpcc
go

checkpoint
```

```
go
```

## DBOPT2.SQL

```
-- File:      DBOPT2.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.01
--           Copyright Microsoft, 1996
-- Purpose:   Resets database options after data load

use master
go

sp_dboption tpcc,'select ',false
go

sp_dboption tpcc,'trunc. ',false
go

use tpcc
go

checkpoint
go

sp_configure allow,1
go

reconfigure with override
go

/*
 * Set option values for user-defined indexes */
sp_indexoption 'customer','AllowPageLocks',FALSE
go
sp_indexoption 'district','AllowPageLocks',FALSE
go
sp_indexoption 'warehouse','AllowPageLocks',FALSE
go
sp_indexoption 'stock','AllowPageLocks',FALSE
go
sp_indexoption 'order_line','AllowRowLocks',FALSE
go
sp_indexoption 'orders','AllowRowLocks',FALSE
go
sp_indexoption 'new_order','AllowRowLocks',FALSE
go
sp_indexoption 'item','AllowRowLocks',FALSE
go
sp_indexoption 'item','AllowPageLocks',FALSE
go

Print ''
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print '  Lockflag = 0 ==> No pre-specified hierarchy'
```

```
Print '  Lockflag = 1 ==> Lock at Page-level then Table-level'
Print '  Lockflag = 2 ==> Lock at Row-level then Table-level'
Print '  Lockflag = 3 ==> Lock at Table-level'
Print ''

select name,lockflags
from sysindexes
where object_id("warehouse")=id or
      object_id("district")=id or
      object_id("customer")=id or
      object_id("stock")=id or
      object_id("orders")=id or
      object_id("order_line")=id or
      object_id("history")=id or
      object_id("new_order")=id or
      object_id("item")=id
order by lockflags asc
go

sp_configure allow,0
go

reconfigure with override
go

exec sp_dboption tpcc, 'auto update statistics', FALSE
exec sp_dboption tpcc, 'auto create statistics', FALSE
go

exec sp_tableoption "district","pintable",true
exec sp_tableoption "warehouse","pintable",true
exec sp_tableoption "new_order","pintable",true
exec sp_tableoption "item","pintable",true
go
```

## IDXCUSCL.SQL

```
-- File:      IDXCUSCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on customer table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_c1' )
   drop index customer.customer_c1

create unique clustered index customer_c1 on customer(c_w_id, c_d_id,
c_id)
   on MSSQL70_cs_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
```

```

select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
go

IDXCUSNC.SQL

-- File:      IDXCUSNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates non-clustered index on customer table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'customer_nc1' )
    drop index customer.customer_nc1

create unique nonclustered index customer_nc1 on customer(c_w_id, c_d_id,
c_last, c_first, c_id)
    on MSSQL70_CS_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
go

```

### **IDXDISCL.SQL**

```

-- File:      IDXDISCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on district table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'district_c1' )
    drop index district.district_c1

create unique clustered index district_c1 on district(d_w_id, d_id)
    on MSSQL70_misc_fg

```

```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
go

```

### **IDXITMCL.SQL**

```

-- File:      IDXITMCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on item table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'item_c1' )
    drop index item.item_c1

create unique clustered index item_c1 on item(i_id)
    on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)
go

```

### **IDXNODCL.SQL**

```

-- File:      IDXNODCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on new_order table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'new_order_c1' )
    drop index new_order.new_order_c1

```

```

create unique clustered index new_order_c1 on new_order(no_w_id, no_d_id,
no_o_id)
    on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## **IDXODLCL.SQL**

```

-- File:      IDXODLCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.00
--             Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on order_line table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'order_line_c1' )
    drop index order_line.order_line_c1

create unique clustered index order_line_c1 on order_line(o_l_w_id,
o_l_d_id, o_l_o_id, o_l_number)
    on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## **IDXORDCL.SQL**

```

-- File:      IDXORDCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.00
--             Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on orders table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

```

```

if exists ( select name from sysindexes where name = 'orders_c1' )
    drop index orders.orders_c1

create unique clustered index orders_c1 on orders(o_w_id, o_d_id, o_id)
    on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## **IDXORDNC.SQL**

```

-- File:      IDXORDNC.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.00
--             Copyright Microsoft, 1996
-- Purpose:   Creates non-clustered index on orders table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'orders_nc1' )
    drop index orders.orders_nc1

create unique nonclustered index orders_nc1 on orders(o_w_id, o_d_id,
o_c_id, o_id)
    on MSSQL70_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## **IDXSTKCL.SQL**

```

-- File:      IDXSTKCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.00
--             Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on stock table

```

```

use tpcc
go

declare @startdate datetime

```

```

declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'stock_c1' )
    drop index stock.stock_c1

create unique clustered index stock_c1 on stock(s_i_id, s_w_id)
    on MSSQL70_CS_FG

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## IDXWARCL.SQL

```

-- File:      IDXWARCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.00
--             Copyright Microsoft, 1996
-- Purpose:   Creates clustered index on warehouse table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name = 'warehouse_c1' )
    drop index warehouse.warehouse_c1

create unique clustered index warehouse_c1 on warehouse(w_id)
    on MSSQL70_MISC_FG

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## RESTORE.SQL

```

-- File:      RESTORE.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.00
--             Copyright Microsoft, 1996
-- Purpose:   Loads database backup from backup files

declare @startdate datetime
declare @enddate datetime

```

```

select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

restore database tpcc from tpccback1, tpccback2 with replace, stats = 5

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ", datediff(second, @startdate,
@enddate)

go

```

## TABLES.SQL

```

-- File:      TABLES.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.00
--             Copyright Microsoft, 1996
-- Purpose:   Creates TPC-C tables

use tpcc
go

if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
create table warehouse
(
    w_id                               smallint,
    w_name                             char(10),
    w_street_1                          char(20),
    w_street_2                          char(20),
    w_city                             char(20),
    w_state                            char(2),
    w_zip                              char(9),
    w_tax                              numeric(4,4),
    w_ytd                              numeric(12,2)
) on MSSQL70_MISC_FG
go

if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
create table district
(
    d_id                               tinyint,
    d_w_id                             smallint,
    d_name                             char(10),
    d_street_1                         char(20),
    d_street_2                         char(20),
    d_city                            char(20),
    d_state                           char(2),
    d_zip                             char(9),
    d_tax                             numeric(4,4),
    d_ytd                             numeric(12,2),
    d_next_o_id                        int
) on MSSQL70_MISC_FG
go

if exists ( select name from sysobjects where name = 'customer' )

```

```

drop table customer
go
create table customer
(
    c_id                      int,
    c_d_id                     tinyint,
    c_w_id                     smallint,
    c_first                    char(16),
    c_middle                   char(2),
    c_last                     char(16),
    c_street_1                 char(20),
    c_street_2                 char(20),
    c_city                      char(20),
    c_state                     char(2),
    c_zip                       char(9),
    c_phone                     char(16),
    c_since                     datetime,
    c_credit                    char(2),
    c_credit_lim                numeric(12,2),
    c_discount                  numeric(4,4),
    c_balance                   numeric(12,2),
    c_ytd_payment               numeric(12,2),
    c_payment_cnt               smallint,
    c_delivery_cnt              smallint,
    c_data                      char(500)
) on MSSQL70_cs_fg
go

if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
create table history
(
    h_c_id                      int,
    h_c_d_id                     tinyint,
    h_c_w_id                     smallint,
    h_d_id                       tinyint,
    h_w_id                       smallint,
    h_date                      datetime,
    h_amount                     numeric(6,2),
    h_data                       char(24)
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
go
create table new_order
(
    no_o_id                      int,
    no_d_id                     tinyint,
    no_w_id                     smallint
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'orders' )
    drop table orders
go
create table orders
(
    o_id                         int,
    o_d_id                       tinyint,
    o_w_id                       smallint,
    o_c_id                       int,
    o_entry_d                    datetime,
    o_carrier_id                tinyint,
    o.ol_cnt                     tinyint,
    o.all_local                  tinyint
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line
go
create table order_line
(
    ol_o_id                      int,
    ol_d_id                     tinyint,
    ol_w_id                     smallint,
    ol_number                    tinyint,
    ol_i_id                      int,
    ol_supply_w_id               smallint,
    ol_delivery_d                datetime,
    ol_quantity                  smallint,
    ol_amount                    numeric(6,2),
    ol_dist_info                 char(24)
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'item' )
    drop table item
go
create table item
(
    i_id                         int,
    i_im_id                      int,
    i_name                       char(24),
    i_price                      numeric(5,2),
    i_data                        char(50)
) on MSSQL70_misc_fg
go

if exists ( select name from sysobjects where name = 'stock' )
    drop table stock
go
create table stock
(
    s_i_id                       int,
    s_w_id                       smallint,
    s_quantity                   smallint,
    s_dist_01                     char(24),
    s_dist_02                     char(24),
    s_dist_03                     char(24),
    s_dist_04                     char(24),
    s_dist_05                     char(24),
    s_dist_06                     char(24),
    s_dist_07                     char(24),
    s_dist_08                     char(24),
    s_dist_09                     char(24),
    s_dist_10                     char(24),
    s_ytd                         int,
    s_order_cnt                  smallint,
)

```

```

    s_remote_cnt      smallint,
    s_data           char(50)
) on MSSQL70_CS_FG
go

```

## VERIFYTPCCLOAD

```

use tpcc
print 'WAREHOUSE'
select rows from sysindexes where id=object_id("warehouse")
print 'DISTRICT = (10 * No of warehouses)'
select rows from sysindexes where id=object_id("district")
print 'ITEM = 100,000'
select rows from sysindexes where id=object_id("item")
print 'CUSTOMER = (30,000 * No of warehouses)'
select rows from sysindexes where id=object_id("customer")
print 'ORDERS = (30,000 * No of warehouses)'
select rows from sysindexes where id=object_id("orders")
print 'HISTORY = (30,000 * No of warehouses)'
select rows from sysindexes where id=object_id("history")
print 'STOCK = (100,000 * No of warehouses)'
select rows from sysindexes where id=object_id("stock")
print 'ORDER_LINE = (300,000 * No of warehouses + some change)'
select rows from sysindexes where id=object_id("order_line")
print 'NEW_ORDER = (9000 * No of warehouses)'
select rows from sysindexes where id=object_id("new_order")
print '*****Index Check*****'
use tpcc
go
sp_helpindex customer
go
sp_helpindex stock
go
sp_helpindex district
go
sp_helpindex item
go
sp_helpindex new_order
go
sp_helpindex orders
go
sp_helpindex order_line
go
sp_helpindex warehouse
go

```

## Stored Procedures

### DELIVERY.SQL

```

-- File:      DELIVERY.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.00
--             Copyright Microsoft, 1996
-- Purpose:   Creates delivery transaction stored procedure

```

```

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_delivery" )
    drop procedure tpcc_delivery
go

create proc tpcc_delivery      @w_id          smallint,
                                @o_carrier_id  smallint
as

declare @d_id tinyint,
        @o_id int,
        @c_id int,
        @total numeric(12,2),
        @oid1 int,
        @oid2 int,
        @oid3 int,
        @oid4 int,
        @oid5 int,
        @oid6 int,
        @oid7 int,
        @oid8 int,
        @oid9 int,
        @oid10 int

select @d_id = 0

begin tran d

while (@d_id < 10)
begin

    select @d_id = @d_id + 1,
           @total = 0,
           @o_id = 0

    select top 1 @o_id = no_o_id
    from new_order (serializable updlock)
    where no_w_id = @w_id and
          no_d_id = @d_id
    order by no_o_id asc

    if (@@rowcount <> 0)
    begin

        -- claim the order for this district

        delete new_order
        where no_w_id = @w_id and
              no_d_id = @d_id and
              no_o_id = @o_id

        -- set carrier_id on this order (and get customer id)

        update orders
            set o_carrier_id = @o_carrier_id,
                @c_id = o_c_id
            where o_w_id = @w_id and
                  o_d_id = @d_id and

```

```

        o_id    = @o_id

-- set date in all lineitems for this order (and sum amounts)

update order_line
    set ol_delivery_d = getdate(),
        @total      = @total + ol_amount
  where ol_w_id = @w_id and
        ol_d_id = @d_id and
        ol_o_id = @o_id

-- accummulate lineitem amounts for this order into customer

update customer
    set c_balance      = c_balance + @total,
        c_delivery_cnt = c_delivery_cnt + 1
  where c_w_id = @w_id and
        c_d_id = @d_id and
        c_id    = @c_id

end

select @oid1 = case @d_id when 1 then @o_id else @oid1 end,
       @oid2 = case @d_id when 2 then @o_id else @oid2 end,
       @oid3 = case @d_id when 3 then @o_id else @oid3 end,
       @oid4 = case @d_id when 4 then @o_id else @oid4 end,
       @oid5 = case @d_id when 5 then @o_id else @oid5 end,
       @oid6 = case @d_id when 6 then @o_id else @oid6 end,
       @oid7 = case @d_id when 7 then @o_id else @oid7 end,
       @oid8 = case @d_id when 8 then @o_id else @oid8 end,
       @oid9 = case @d_id when 9 then @o_id else @oid9 end,
       @oid10 = case @d_id when 10 then @o_id else @oid10 end

end

commit tran d

-- return delivery data to client

select @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10

go

```

## NEWORD.SQL

```

-- File:      NEWORD.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.00
--             Copyright Microsoft, 1996
-- Purpose:   Creates new order transaction stored procedure
--
```

```

-- Modified 9/21/98 - Jamie Reding - Microsoft Corporation
-- Reordered @rowcount check so that invalid supply warehouse
id,
-- as well as invalid item id, is detected and causes explicit
-- transaction rollback.
--

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_neworder" )
    drop procedure tpcc_neworder
go

create proc tpcc_neworder
    @w_id          smallint,
    @d_id          tinyint,
    @c_id          int,
    @o.ol_cnt     tinyint,
    @o.all_local  tinyint,
    @i_id1         int = 0, @s_w_id1 smallint =
    0, @ol_qty1 smallint = 0,
    0, @ol_qty2 smallint = 0,
    0, @ol_qty3 smallint = 0,
    0, @ol_qty4 smallint = 0,
    0, @ol_qty5 smallint = 0,
    0, @ol_qty6 smallint = 0,
    0, @ol_qty7 smallint = 0,
    0, @ol_qty8 smallint = 0,
    0, @ol_qty9 smallint = 0,
    = 0, @ol_qty10 smallint = 0,
    = 0, @ol_qty11 smallint = 0,
    = 0, @ol_qty12 smallint = 0,
    = 0, @ol_qty13 smallint = 0,
    = 0, @ol_qty14 smallint = 0,
    = 0, @ol_qty15 smallint = 0

as
declare @w_tax           numeric(4,4),
        @d_tax           numeric(4,4),
        @c_last          char(16),
        @c_credit         char(2),
        @c_discount       numeric(4,4),
        @i_price          numeric(5,2),
        @i_name           char(24),
        @i_data           char(50),

```

```

@o_entry_d      datetime,
@remote_flag    int,
@s_quantity      smallint,
@s_data          char(50),
@s_dist          char(24),
    @li_no        int,
    @o_id          int,
    @commit_flag   tinyint,
@li_id          int,
@li_s_w_id       smallint,
@li_qty          smallint,
    @ol_number     int,
    @c_id_local    int

begin

begin transaction n

-- get district tax and next available order id and update
-- plus initialize local variables

update district
set
    @d_tax      = d_tax,
    @o_id       = d_next_o_id,
    d_next_o_id = d_next_o_id + 1,
    @o_entry_d  = getdate(),
    @li_no      = 0,
    @commit_flag = 1
where d_w_id      = @w_id and
      d_id       = @d_id

-- process orderlines

while (@li_no < @o.ol_cnt)
begin

    select @li_no = @li_no + 1

-- set i_id, s_w_id, and qty for this lineitem

    select @li_id = case @li_no
        when 1 then @i_id1
        when 2 then @i_id2
        when 3 then @i_id3
        when 4 then @i_id4
        when 5 then @i_id5
        when 6 then @i_id6
        when 7 then @i_id7
        when 8 then @i_id8
        when 9 then @i_id9
        when 10 then @i_id10
        when 11 then @i_id11
        when 12 then @i_id12
        when 13 then @i_id13
        when 14 then @i_id14
        when 15 then @i_id15
    end,

    @li_s_w_id = case @li_no
        when 1 then @s_w_id1
        when 2 then @s_w_id2
    end

    when 3 then @s_w_id3
    when 4 then @s_w_id4
    when 5 then @s_w_id5
    when 6 then @s_w_id6
    when 7 then @s_w_id7
    when 8 then @s_w_id8
    when 9 then @s_w_id9
    when 10 then @s_w_id10
    when 11 then @s_w_id11
    when 12 then @s_w_id12
    when 13 then @s_w_id13
    when 14 then @s_w_id14
    when 15 then @s_w_id15
end,
@li_qty = case @li_no
when 1 then @ol_qty1
when 2 then @ol_qty2
when 3 then @ol_qty3
when 4 then @ol_qty4
when 5 then @ol_qty5
when 6 then @ol_qty6
when 7 then @ol_qty7
when 8 then @ol_qty8
when 9 then @ol_qty9
when 10 then @ol_qty10
when 11 then @ol_qty11
when 12 then @ol_qty12
when 13 then @ol_qty13
when 14 then @ol_qty14
when 15 then @ol_qty15
end

-- get item data (no one updates item)

select @i_price = i_price,
       @i_name  = i_name,
       @i_data   = i_data
from item (tablock repeatableread)
where i_id = @li_id

-- update stock values

update stock
set
    s_ytd      = s_ytd + @li_qty,
    @s_quantity = s_quantity - @li_qty +
        case when (s_quantity - @li_qty < 10) then 91 else 0 end,
    s_order_cnt = s_order_cnt + 1,
    s_remote_cnt = s_remote_cnt +
        case
            when (@li_s_w_id = @w_id) then 0 else 1 end,
            @s_data      = s_data,
            @s_dist      = case @d_id
                when 1 then s_dist_01
                when 2 then s_dist_02
                when 3 then s_dist_03
                when 4 then s_dist_04
            end
        end
end

```

```

        when 5  then s_dist_05
        when 6  then s_dist_06
        when 7  then s_dist_07
        when 8  then s_dist_08
        when 9  then s_dist_09
        when 10 then s_dist_10
    end
    where s_i_id      = @li_id and
          s_w_id      = @li_s_w_id

-- if there actually is a stock (and item) with these ids, go to work

    if (@@rowcount > 0)
        begin

-- insert order_line data (using data from item and stock)

            insert into order_line values(@o_id,
                @d_id,
                @w_id,
                @li_no,
                @li_id,
                @li_s_w_id,
                "dec 31, 1899",
                @li_qty,
                @i_price * @li_qty,
                @s_dist)

-- send line-item data to client

            select @i_name,
                   @s_quantity,
                   b_g = case when (
    (patindex("%ORIGINAL%",@i_data) > 0) and
    (patindex("%ORIGINAL%",@s_data) > 0) )
                           then "B" else "G"
end,
                   @i_price,
                   @i_price * @li_qty
            end
        else
            begin

-- no item (or stock) found - triggers rollback condition

                select "",0,"",0,0
                select @commit_flag = 0
            end
        end
    end
end
end

-- get customer last name, discount, and credit rating

select      @c_last      = c_last,
            @c_discount = c_discount,
            @c_credit   = c_credit,
            @c_id_local = c_id
from        customer (repeatableread)
where       c_id      = @c_id and
            c_w_id    = @w_id and
            c_d_id    = @d_id

-- insert fresh row into orders table

insert into orders values (@o_id,
                @d_id,
                @w_id,
                @c_id_local,
                @o_entry_d,
                0,
                @o.ol_cnt,
                @o.all_local)

-- insert corresponding row into new-order table

insert into new_order values (@o_id,
                @d_id,
                @w_id)

-- select warehouse tax

select      @w_tax = w_tax
from        warehouse (repeatableread)
where       w_id     = @w_id

if (@commit_flag = 1)
    commit transaction n
else
    rollback transaction n

-- all that work for nuthin!!!

-- return order data to client

select @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag
end
go

```

## ORDSTAT.SQL

```
-- File: ORDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.00
-- Copyright Microsoft, 1996
-- Purpose: Creates order status transaction stored procedure

use tpcc
go

if exists ( select name from sysobjects where name = "tpcc_orderstatus" )
    drop procedure tpcc_orderstatus
go

create proc tpcc_orderstatus @w_id           smallint,
                                @d_id          tinyint,
                                @c_id          int,
                                @c_last        char(16) = ""
as

declare @c_balance      numeric(12,2),
        @c_first       char(16),
        @c_middle      char(2),
        @o_id          int,
        @o_entry_d     datetime,
        @o_carrier_id  smallint,
        @cnt           smallint

begin tran o

    if (@c_id = 0)
        begin

-- get customer id and info using last name

            select @cnt = (count(*)+1)/2
            from customer (repeatableread)
            where c_last = @c_last and
                  c_w_id = @w_id and
                  c_d_id = @d_id

            set rowcount @cnt

            select @c_id = c_id,
                   @c_balance = c_balance,
                   @c_first = c_first,
                   @c_last = c_last,
                   @c_middle = c_middle
            from customer (repeatableread)
            where c_last = @c_last and
                  c_w_id = @w_id and
                  c_d_id = @d_id
            order by c_w_id, c_d_id, c_last, c_first

            set rowcount 0
        end

```

```
else
    begin

-- get customer info if by id

        select @c_balance = c_balance,
               @c_first = c_first,
               @c_middle = c_middle,
               @c_last = c_last
        from customer (repeatableread)
        where c_id = @c_id and
              c_d_id = @d_id and
              c_w_id = @w_id

        select @cnt = @@rowcount
    end

-- if no such customer

    if (@cnt = 0)
        begin
            raiserror("Customer not found",18,1)
            goto custnotfound
        end

-- get order info

        select @o_id = o_id,
               @o_entry_d = o_entry_d,
               @o_carrier_id = o_carrier_id
        from orders (serializable)
        where o_c_id = @c_id and
              o_d_id = @d_id and
              o_w_id = @w_id
        order by o_id asc

-- select order lines for the current order

        select ol_supply_w_id,
               ol_i_id,
               ol_quantity,
               ol_amount,
               ol_delivery_d
        from order_line (repeatableread)
        where ol_o_id = @o_id and
              ol_d_id = @d_id and
              ol_w_id = @w_id

custnotfound:
commit tran o

-- return data to client

select @c_id,
       @c_last,
       @c_first,
       @c_middle,
       @o_entry_d,
```

```

@o_carrier_id,
@c_balance,
@o_id

go

PAYMENTS.SQL

-- File: PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.00
-- Copyright Microsoft, 1996
-- Purpose: Creates payment transaction stored procedure

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_payment" )
    drop procedure tpcc_payment
go

create proc tpcc_payment @w_id
    smallint,
        @c_w_id      smallint,
        @h_amount    numeric(6,2),
        @d_id        tinyint,
        @c_d_id      tinyint,
        @c_id        int,
        @c_last      char(16) =
"""

as
declare @w_street_1      char(20),
        @w_street_2      char(20),
        @w_city          char(20),
        @w_state         char(2),
        @w_zip           char(9),
        @w_name          char(10),
        @d_street_1      char(20),
        @d_street_2      char(20),
        @d_city          char(20),
        @d_state         char(2),
        @d_zip           char(9),
        @d_name          char(10),
        @c_first          char(16),
        @c_middle         char(2),
        @c_street_1      char(20),
        @c_street_2      char(20),
        @c_city          char(20),
        @c_state         char(2),
        @c_zip           char(9),
        @c_phone          char(16),
        @c_since          datetime,
        @c_credit         char(2),
        @c_credit_lim    numeric(12,2),
        @c_balance        numeric(12,2),
        @c_discount       numeric(4,4),
        @data             char(500),
        @c_data           char(500),

```

```

        @datetime      datetime,
        @w_ytd         numeric(12,2),
        @d_ytd         numeric(12,2),
        @cnt           smallint,
        @val           smallint,
        @screen_data   char(200),
        @d_id_local    tinyint,
        @w_id_local    smallint,
        @c_id_local    int

select @screen_data = ""

begin tran p

-- get payment date

select @datetime = getdate()

if (@c_id = 0)
begin

-- get customer id and info using last name

select @cnt = count(*)
from customer (repeatableread)
where c_last = @c_last and
      c_w_id = @c_w_id and
      c_d_id = @c_d_id

select @val = (@cnt + 1) / 2
set rowcount @val

select @c_id = c_id
from customer (repeatableread)
where c_last = @c_last and
      c_w_id = @c_w_id and
      c_d_id = @c_d_id
order by c_last, c_first

set rowcount 0
end

-- get customer info and update balances

update customer set
    @c_balance      = c_balance - @h_amount,
    c_payment_cnt   = c_payment_cnt + 1,
    c_ytd_payment   = c_ytd_payment + @h_amount,
    @c_first         = c_first,
    @c_middle        = c_middle,
    @c_last          = c_last,
    @c_street_1      = c_street_1,
    @c_street_2      = c_street_2,
    @c_city          = c_city,
    @c_state         = c_state,
    @c_zip           = c_zip,
    @c_phone          = c_phone,
    @c_credit         = c_credit,
    @c_credit_lim    = c_credit_lim,
    @c_discount       = c_discount,
```

```

        @c_since      = c_since,
        @data         = c_data,
        @c_id_local   = c_id
    where c_id = @c_id and
          c_w_id = @c_w_id and
          c_d_id = @c_d_id

-- if customer has bad credit get some more info

    if (@c_credit = "BC")
begin

-- compute new info

        select @c_data = convert(char(5),@c_id) +
                           convert(char(4),@c_d_id) +
                           convert(char(5),@c_w_id) +
                           convert(char(4),@d_id) +
                           convert(char(5),@w_id) +
                           convert(char(19),@h_amount) +
                           substring(@data, 1, 458)

-- update customer info

        update customer set
            c_data = @c_data
        where c_id = @c_id and
              c_w_id = @c_w_id and
              c_d_id = @c_d_id

        select @screen_data = substring (@c_data,1,200)
end

-- get district data and update year-to-date

        update district
set d_ytd      = d_ytd + @h_amount,
    @d_street_1 = d_street_1,
    @d_street_2 = d_street_2,
    @d_city     = d_city,
    @d_state    = d_state,
    @d_zip      = d_zip,
    @d_name     = d_name,
    @d_id_local = d_id
where d_w_id = @w_id and
      d_id      = @d_id

-- get warehouse data and update year-to-date

        update warehouse
set w_ytd      = w_ytd + @h_amount,
    @w_street_1 = w_street_1,
    @w_street_2 = w_street_2,
    @w_city     = w_city,
    @w_state    = w_state,
    @w_zip      = w_zip,
    @w_name     = w_name,
    @w_id_local = w_id
where w_id = @w_id

-- create history record

```

```

        insert into history values  (@c_id_local,
                                     @c_d_id,
                                     @c_w_id,
                                     @d_id_local,
                                     @w_id_local,
                                     @datetime,
                                     @h_amount,
                                     @w_name + "

" + @d_name)

commit tran p

-- return data to client

select  @c_id,
        @c_last,
        @datetime,
        @w_street_1,
        @w_street_2,
        @w_city,
        @w_state,
        @w_zip,
        @d_street_1,
        @d_street_2,
        @d_city,
        @d_state,
        @d_zip,
        @c_first,
        @c_middle,
        @c_street_1,
        @c_street_2,
        @c_city,
        @c_state,
        @c_zip,
        @c_phone,
        @c_since,
        @c_credit,
        @c_credit_lim,
        @c_discount,
        @c_balance,
        @screen_data

go

```

## STOCKLEV.SQL

```

-- File:      STOCKLEV.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Creates stock level transaction stored procedure

use tpcc
go

if exists (select name from sysobjects where name = "tpcc_stocklevel" )
drop procedure tpcc_stocklevel
go

```

```

create proc tpcc_stocklevel  @w_id          smallint,
                             @d_id           tinyint,
                             @threshold      smallint
as

    declare @o_id_low int,
            @o_id_high int

    select @o_id_low = (d_next_o_id - 20),
          @o_id_high = (d_next_o_id - 1)
    from district
    where d_w_id = @w_id and
          d_id = @d_id

    select count(distinct(s_i_id))
      from stock, order_line
     where ol_w_id = @w_id and
           ol_d_id = @d_id and
           ol_o_id between @o_id_low and @o_id_high and
           s_w_id = ol_w_id and
           s_i_id = ol_i_id and
           s_quantity < @threshold

```

go

## Loader Source

### GETARGS.C

```

//      File:          GETARGS.C
//                      Microsoft TPC-C Kit Ver. 4.00
//                      Copyright Microsoft, 1996, 1997, 1998
//      Purpose:        Source file for command line processing

// Includes
#include "tpcc.h"

//=====
// Function name: GetArgsLoader
//=====

void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{
    int      i;
    char    *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int)
GetCurrentThreadId());
#endif

/* init args struct with some useful values */

```

```

pargs->server          = SERVER;
pargs->user             = USER;
pargs->password         = PASSWORD;
pargs->database         = DATABASE;
pargs->batch             = BATCH;
pargs->num_warehouses   = UNDEF;
pargs->tables_all       = TRUE;
pargs->table_item        = FALSE;
pargs->table_warehouse  = FALSE;
pargs->table_customer   = FALSE;
pargs->table_orders     = FALSE;
pargs->loader_res_file  = LOADER_RES_FILE;
pargs->pack_size         = DEFLDPACKSIZE;
pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
pargs->build_index       = BUILD_INDEX;
pargs->index_order       = INDEX_ORDER;
pargs->index_script_path = INDEX_SCRIPT_PATH;
pargs->scale_down        = SCALE_DOWN;

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for (i = 1; i < argc; ++i)
{
    if (argv[i][0] != '-' && argv[i][0] != '/')
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];

    switch (ptr[1])
    {
        case 'h': /* Fall throught */
        case 'H':
            GetArgsLoaderUsage();
            break;

        case 'D':
            pargs->database = ptr+2;
            break;

        case 'P':
            pargs->password = ptr+2;
            break;

        case 'S':
            pargs->server = ptr+2;
            break;

        case 'U':
            pargs->user = ptr+2;
            break;

        case 'b':
            pargs->batch = atol(ptr+2);
            break;
    }
}

```

```

case 'W':
    pargs->num_warehouses = atol(ptr+2);
    break;

case 's':
    pargs->starting_warehouse = atol(ptr+2);
    break;

case 't':
{
    pargs->tables_all = FALSE;
    if (strcmp(ptr+2,"item") == 0)
        pargs->table_item = TRUE;
    else if (strcmp(ptr+2,"warehouse"))
        pargs->table_warehouse =
    else if (strcmp(ptr+2,"customer") == 0)
        pargs->table_customer = TRUE;
    else if (strcmp(ptr+2,"orders") == 0)
        pargs->table_orders = TRUE;
    else
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }
    break;
}

case 'f':
    pargs->loader_res_file = ptr+2;
    break;

case 'p':
    pargs->pack_size = atol(ptr+2);
    break;

case 'i':
    pargs->build_index = atol(ptr+2);
    break;

case 'o':
    pargs->index_order = atol(ptr+2);
    break;

case 'c':
    pargs->scale_down = atol(ptr+2);
    break;

case 'd':
    pargs->index_script_path = ptr+2;
    break;

default:
    GetArgsLoaderUsage();
    exit(-1);
    break;
}
}

/* check for required args */
if (pargs->num_warehouses == UNDEF )
{
    printf("Number of Warehouses is required\n");
    exit(-2);
}

return;
}

//=====================================================================
// Function name: GetArgsLoaderUsage
//=====================================================================

void GetArgsLoaderUsage()
{
#ifndef DEBUG
    printf("[%ld] DBG: Entering GetArgsLoaderUsage()\n", (int)GetCurrentThreadId());
#endif

    printf("TPCCLDR:\n\n");
    printf("Parameter
Default\n");
    printf("-----\n-----\n");
    printf("-W Number of Warehouses to Load
\n");
    printf("-S Server
SERVER);
    printf("-U Username
USER);
    printf("-P Password
PASSWORD);
    printf("-D Database
DATABASE);
    printf("-b Batch Size
%ld\n", (long) BATCH);
    printf("-p TDS packet size
%ld\n", (long) DEFLDPACKSIZE);
    printf("-f Loader Results Output Filename
%s\n", LOADER_RES_FILE);
    printf("-s Starting Warehouse
%ld\n", (long) DEF_STARTING_WAREHOUSE);
    printf("-i Build Option (data = 0, data and index = 1)
%ld\n", (long) BUILD_INDEX);
    printf("-o Cluster Index Build Order (before = 1, after = 0)
%ld\n", (long) INDEX_ORDER);
    printf("-c Build Scaled Database (normal = 0, tiny = 1)
%ld\n", (long) SCALE_DOWN);
    printf("-d Index Script Path
%s\n", INDEX_SCRIPT_PATH);

```

```

        printf("-t Table to Load
tables \n");
        printf("    [item|warehouse|customer|orders]\n");
        printf(" Notes: \n");
        printf(" - the '-t' parameter may be included multiple times to
\n");
        printf("     specify multiple tables to be loaded \n");
        printf(" - 'item' loads ITEM table \n");
        printf(" - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables
\n");
        printf(" - 'customer' loads CUSTOMER and HISTORY tables \n");
        printf(" - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables
\n");
printf("\nNote: Command line switches are case sensitive.\n");
exit(0);
}

```

## RANDOM.C

```

//      File:          RANDOM.C
//                                         Microsoft TPC-C Kit Ver. 4.00
//                                         Copyright Microsoft, 1996, 1997, 1998
//      Purpose:        Random number generation routines for database
loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A           16807
#define M           2147483647
#define Q           127773 /* M div A */
#define R           2836  /* M mod A */
#define Thread      __declspec(thread)

// Globals
long Thread Seed = 0; /* thread local seed */

*****
*
*
* random -
*
*     Implements a GOOD pseudo random number generator. This generator
*
*     will/should? run the complete period before repeating.
*
*
* Copied from:
*
*     Random Numbers Generators: Good Ones Are Hard to Find.
*
```

```

all *      Communications of the ACM - October 1988 Volume 31 Number 10
*      *
*      *
*      *
* Machine Dependencies:
*      *
*         long must be 2 ^ 31 - 1 or greater.
*      *
*      *
*****/
*****/
* seed - load the Seed value used in irand and drand. Should be used
before   *
*         first call to irand or drand.
*
*****/
*****/
void seed(long val)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int) GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n", Seed, val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

*****
* irand - returns a 32 bit integer pseudo random number with a period of
*
*         1 to 2 ^ 32 - 1.
*
*
* parameters:
*
*         none.
*
*
* returns:
*
*         32 bit integer - defined as long ( see above ) .
*
*
*
```

```

* side effects:
*
*      seed get recomputed.
*
***** */
***/
long irand()
{
    register long s;      /* copy of seed */
    register long test;   /* test flag */
    register long hi;     /* tmp value for speed */
    register long lo;     /* tmp value for speed */

#ifdef DEBUG
    printf("[%ld]DBG: Entering irand()...\n", (int) GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

/*****
*/
* 
* drand - returns a double pseudo random number between 0.0 and 1.0.
*
*      See irand.
*
***** */
double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int) GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0 );
}

//===== //
// Function : RandomNumber
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

```

```

#endif DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96 perf enhancement */

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
           rand_num);
#endif

    return rand_num;
}

#endif 0

//Orginal code pgd 08/13/96
long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n", (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() % ((upper > lower) ? upper - lower : upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\n",
           (int) GetCurrentThreadId(), lower, upper,
           rand_num);
#endif

    return rand_num;
}

```

```

#endif

//=====
// Function   : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int)GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1)) +x;

#ifdef DEBUG
    printf("[%ld]DBG: NURand: num = %d\n", (int)GetCurrentThreadId(),
rand_num);
#endif

    return rand_num;
}

```

## STRINGS.C

```

//      File:          STRINGS.C
//                                Microsoft TPC-C Kit Ver. 4.00
//                                Copyright Microsoft, 1996, 1997, 1998
//      Purpose:        Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
// Function name: MakeAddress
//=====
void MakeAddress(char *street_1,
                 char *street_2,
                 char *city,
                 char *state,
                 char *zip)
{
#ifdef DEBUG

```

```

    printf("[%ld]DBG: Entering MakeAddress()\n", (int)GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString (2, 2, STATE_LEN, state);
    MakeZipNumberString(9, 9, ZIP_LEN, zip);

#ifndef DEBUG
    printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s,
state: %s, zip: %s\n",
           (int) GetCurrentThreadId(), street_1, street_2,
city, state, zip);
#endif

    return;
}

//=====
// Function name: LastName
//=====
void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT", "ABLE" , "PRI" , "PRES",
        "ESE" , "ANTI" , "CALLY", "ATION", "EING"
    };

#ifndef DEBUG
    printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
        exit(-1);
    }
}
```

```

#ifndef DEBUG
    printf("[%ld]DBG: LastName: num = [%d] ==> [%d] [%d] [%d]\n",
           (int) GetCurrentThreadId(), num, num/100,
           (num/10)%10, num%10);
    printf("[%ld]DBG: LastName: String = %s\n", (int)
GetCurrentThreadId(), name);
#endif

    return;
}

//=====
// Function name: MakeAlphaString
//=====
//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2      The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random
alphanumeric
//(respectively, numeric) characters of a random length of minimum x,
maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9.  The only
other
//requirement is that the character set used "must be able to represent a
minimum
//of 128 different characters".  We are using 8-bit chars, so this is a
non issue.
//It is completely unreasonable to stuff non-printing chars into the text
fields.
//CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int         len;
    int         i;
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int     chArrayMax = 61;

#ifndef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0, chArrayMax)];
    if ( len < z )
        memset(str+len, ' ', z - len);
    str[len] = 0;

    return len;
}

```

```

//=====
// Function name: MakeOriginalAlphaString
//=====
//=====

int MakeOriginalAlphaString(int x,
                           int y,
                           int z,
                           char *str,
                           int percent)
{
    int         len;
    int         val;
    int         start;

#ifndef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage: %d\n",
percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if ((x + y) <= 8)
    {
        printf("MakeOriginalAlphaString: string length must be >=
8\n");
        exit(-1);
    }

    // Make Alpha String
    len = MakeAlphaString(x,y, z, str);

    val = RandomNumber(1,100);
    if (val <= percent)
    {
        start = RandomNumber(0, len - 8);
        strncpy(str + start, "ORIGINAL", 8);
    }

#ifndef DEBUG
    printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
           (int) GetCurrentThreadId(), str);
#endif

    return strlen(str);
}

//=====
// Function name: MakeNumberString
//=====
```

```

//=====
//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16,
16, string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

//=====
//=====
// Function name: MakeZipNumberString
//=====
//=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9,
9, string)

    strcpy(str, "00001111");
    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
//=====
// Function name: InitString
//=====
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int)
GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

```

```

// Function name: InitAddress
//=====
// Description:
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state,
char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

//=====
//=====
// Function name: PaddString
//=====
//=====
void PaddString(int max, char *name)
{
    int len;

    len = strlen(name);
    if (len < max)
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

TIME.C

// File: TIME.C
// Microsoft TPC-C Kit Ver. 4.00
// Copyright Microsoft, 1996, 1997, 1998
// Purpose: Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

```

```

// Function name: TimeNow
// =====
long TimeNow()
{
    long      time_now;
    struct _timeb el_time;

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

## TPCC.H

```

// File:           TPCC.H
//                  Microsoft TPC-C Kit Ver. 4.00
//                  Copyright Microsoft, 1996, 1997, 1998
// Purpose:        Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER     "4.00"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

// General constants
#define MILLI          1000
#define FALSE          0
#define TRUE           1
#define UNDEF          -1
#define MINPRINTASCII  32
#define MAXPRINTASCII  126

// Default environment constants

```

```

#define SERVER          ""          // tpcc"
#define DATABASE        "sa"       // ""
#define USER            ""          // ""
#define PASSWORD        ""          // ""

// Default loader arguments
#define BATCH           10000
#define DEFLDPACKSIZE   32768
#define ORDERS_PER_DIST 3000
#define LOADER_RES_FILE "logs\\load.out"
#define LOADER_NURAND_C 123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX      1          // build both
data and indexes
#define INDEX_ORDER      1          // build
indexes before load
#define SCALE_DOWN       0          // build a normal
scale database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char             *server;
    char             *database;
    char             *user;
    char             *password;
    tables_all;       // set
if loading all tables
    BOOL             table_item; // set
if loading ITEM table specifically
    BOOL             table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL             table_customer; // set
if loading CUSTOMER and HISTORY
    BOOL             table_orders; // set if
loading NEW-ORDER, ORDERS, ORDER-LINE
    long             num_warehouses;
    long             batch;
    long             verbose;
    long             pack_size;
    char             *loader_res_file;
    char             *synch_servername;
    long             case_sensitivity;
    long             starting_warehouse;
    long             build_index;
    long             index_order;
    long             scale_down;
    char             *index_script_path;
} TPCLDR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN    20
#define PASSWORD_LEN     20
#define TABLE_NAME_LEN   20
#define I_DATA_LEN       50
#define I_NAME_LEN       24
#define BRAND_LEN        1
#define LAST_NAME_LEN    16
#define W_NAME_LEN       10

```

```

#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OI_NEW_ORDER_ITEMS 15
#define MAX_OI_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

```

## TPCCLDR.C

```

// File: TPCCLDR.C
// Microsoft TPC-C Kit Ver. 4.00
// Copyright Microsoft, 1996, 1997, 1998
// Purpose: Source file for TPC-C database loader

```

```

// Includes
#include "tpcc.h"
#include "search.h"

```

```

// Defines
#define MAXITEMS 100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);

long NURand();
void LoadItem();
void LoadWarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures
typedef struct
{
    long ol;
    long ol_i_id;
    short ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    char ol_dist_info[DIST_INFO_LEN+1];
    char ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long o_id;
    short o_d_id;
    short o_w_id;
    long o_c_id;
} ORDER_STRUCT;

```

```

short          o_carrier_id;
short          o.ol_cnt;
short          o.all_local;
ORDER_LINE_STRUCT o.ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long           c_id;
    short          c_d_id;
    short          c_w_id;
    char           c_first[FIRST_NAME_LEN+1];
    char           c_middle[MIDDLE_NAME_LEN+1];
    char           c_last[LAST_NAME_LEN+1];
    char           c_street_1[ADDRESS_LEN+1];
    char           c_street_2[ADDRESS_LEN+1];
    char           c_city[ADDRESS_LEN+1];
    char           c_state[STATE_LEN+1];
    char           c_zip[ZIP_LEN+1];
    char           c_phone[PHONE_LEN+1];
    char           c_credit[CREDIT_LEN+1];
    double         c_credit_lim;
    double         c_discount;
// fix to avoid ODBC float to numeric conversion problem.
// double        c_balance;
// char          c_balance[6];

    double         c_ytd_payment;
    short          c_payment_cnt;
    short          c_delivery_cnt;
    char           c_data[C_DATA_LEN+1];
    h_amount;
    h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char           c_last[LAST_NAME_LEN+1];
    char           c_first[FIRST_NAME_LEN+1];
    c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long           time_start;
} LOADER_TIME_STRUCT;

// Global variables

char    szLastError[300];
HENV    henv;
HDBC    i_hdbc1;                                // for ITEM table
HDBC    w_hdbc1;                                // for WAREHOUSE,
DISTRICT, STOCK
HDBC    c_hdbc1;                                // for CUSTOMER
HDBC    c_hdbc2;                                // for HISTORY
HDBC    o_hdbc1;                                // for ORDERS
HDBC    o_hdbc2;                                // for NEW-ORDER
HDBC    o_hdbc3;                                // for ORDER-LINE
HSTMT  i_hstmt1;
HSTMT  w_hstmt1;
HSTMT  c_hstmt1, c_hstmt2;
HSTMT  o_hstmt1, o_hstmt2, o_hstmt3;
ORDERS_STRUCT orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long   orders_rows_loaded;
long   new_order_rows_loaded;
long   order_line_rows_loaded;
long   history_rows_loaded;
long   customer_rows_loaded;
long   stock_rows_loaded;
long   district_rows_loaded;
long   item_rows_loaded;
long   warehouse_rows_loaded;
long   main_time_start;
long   main_time_end;
long   max_items;
long   customers_per_district;
long   orders_per_district;
long   first_new_order;
long   last_new_order;
TPCCLDR_ARGS *aptr, args;
=====
// Function name: main
//
=====
int main(int argc, char **argv)
{
    DWORD          dwThreadID[MAX_MAIN_THREADS];
    HANDLE         hThread[MAX_MAIN_THREADS];
    FILE          *fLoader;
    char           buffer[255];
    int            i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****\n");
    printf("\n* Microsoft SQL Server\n");
    printf("\n* TPC-C BENCHMARK KIT: Database loader\n");
    printf("\n* Version %s\n",
TPCKIT_VER);
    printf("\n*");
    printf("\n*****\n");
);
}

```

```

// process command line arguments

aptr = &args;
GetArgsLoader(argc, argv, aptr);

printf("Build interface is ODBC.\n");

if (aptr->build_index == 0)
    printf("Data load only - no index creation.\n");
else
    printf("Data load and index creation.\n");

if (aptr->index_order == 0)
    printf("Clustered indexes will be created after bulk
load.\n");
else
    printf("Clustered indexes will be created before bulk
load.\n");

// set database scale values
if (aptr->scale_down == 1)
{
    printf("*** Scaled Down Database ***\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district = CUSTOMERS_SCALE_DOWN;
    orders_per_district = ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// start loading data

sprintf(buffer,"TPC-C load started for %ld warehouses.\n",aptr-
>num_warehouses);

printf("%s",buffer);
fprintf(fLoader,"%s",buffer);

main_time_start = (TimeNow() / MILLI);

```

```

// start parallel load threads

if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting loader threads for: item\n");

    hThread[0] = CreateThread(NULL,
                             0,
                             (LPTHREAD_START_ROUTINE) LoadItem,
                             NULL,
                             0,
                             &dwThreadID[0]);

    if (hThread[0] == NULL)
    {
        printf("Error, failed in creating creating thread =
0.\n");
        exit(-1);
    }

    if (aptr->tables_all || aptr->table_warehouse)
    {
        fprintf(fLoader, "Starting loader threads for:
warehouse\n");

        hThread[1] = CreateThread(NULL,
                                 0,
                                 (LPTHREAD_START_ROUTINE) LoadWarehouse,
                                 NULL,
                                 0,
                                 &dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread =
1.\n");
            exit(-1);
        }

        if (aptr->tables_all || aptr->table_customer)
        {
            fprintf(fLoader, "Starting loader threads for:
customer\n");

            hThread[2] = CreateThread(NULL,
                                     0,
                                     (LPTHREAD_START_ROUTINE) LoadCustomer,
                                     NULL,
                                     0,
                                     &dwThreadID[2]);
        }
    }
}

if (hThread[2] == NULL)

```

```

        {
            printf("Error, failed in creating creating main
thread = 2.\n");
            exit(-1);
        }

        if (aptr->tables_all || aptr->table_orders)
        {
            fprintf(fLoader, "Starting loader threads for: orders\n");

            hThread[3] = CreateThread(NULL,
                                      0,
(LPTHREAD_START_ROUTINE) LoadOrders,
                                      NULL,
                                      0,
&dwThreadID[3]);

            if (hThread[3] == NULL)
            {
                printf("Error, failed in creating creating main
thread = 3.\n");
                exit(-1);
            }
        }

        // Wait for threads to finish...
        for (i=0; i<MAX_MAIN_THREADS; i++)
        {
            if (hThread[i] != NULL)
            {
                WaitForSingleObject( hThread[i], INFINITE );
                CloseHandle(hThread[i]);
                hThread[i] = NULL;
            }
        }

        main_time_end = (TimeNow() / MILLI);

        sprintf(buffer,"\\nTPC-C load completed successfully in %ld
minutes.\n",
                (main_time_end - main_time_start)/60);

        printf("%s",buffer);
        fprintf(fLoader, "%s", buffer);

        fclose(fLoader);

        SQLFreeEnv(henv);

        exit(0);
    }

    return 0;
}

//=====
// Function name: LoadItem

```

```

//=====
//=====

void LoadItem()
{
    long          i_id;
    long          i_im_id;
    char          i_name[I_NAME_LEN+1];
    double        i_price;
    char          i_data[I_DATA_LEN+1];
    char          name[20];
    long          time_start;
    RETCODE       rc;
    DBINT         rcint;
    char          bcphint[128];

    // Seed with unique number
    seed(1);

    printf("Loading item table...\n");

    // if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitmcl");

    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);

    sprintf(name, "%s..%s", aptr->database, "item");

    rc = bcp_init(i_hdbc1, name, NULL, "logs\\item.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (i_id), ROWS_PER_BATCH =
100000");
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
    }

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0,
3);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 4);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(i_hdbc1);

    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, I_DATA_LEN, NULL, 0, 0,
5);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    time_start = (TimeNow() / MILLI);

    item_rows_loaded = 0;

    for (i_id = 1; i_id <= max_items; i_id++)
    {
        i_im_id = RandomNumber(1L, 10000L);

        MakeAlphaString(14, 24, I_NAME_LEN, i_name);

        i_price = ((float) RandomNumber(100L, 10000L))/100.0;

        MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

        rc = bcp_sendrow(i_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        item_rows_loaded++;
        CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
    }

    rcint = bcp_done(i_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxitmcl");
}

//=====
// Function : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District as Warehouses are
created
//=====
//=====

void LoadWarehouse()
{
    short      w_id;

```

```

    char      w_name[W_NAME_LEN+1];
    char      w_street_1[ADDRESS_LEN+1];
    char      w_street_2[ADDRESS_LEN+1];
    char      w_city[ADDRESS_LEN+1];
    char      w_state[STATE_LEN+1];
    char      w_zip[ZIP_LEN+1];
    double   w_tax;
    double   w_ytd;
    char      name[20];
    long     time_start;
    RETCODE  rc;
    DBINT    rcint;
    char     bcphint[128];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxwarcl");

    InitString(w_name, W_NAME_LEN+1);
    InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

    sprintf(name, "%s..%s", aptr->database, "warehouse");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\whouse.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (w_id), ROWS_PER_BATCH =
%d", aptr->num_warehouses);
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0,
2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL,
0, 0, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL,
0, 0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

```

```

        rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0,
0, 5);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0,
6);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, 7);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 8);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        time_start = (TimeNow() / MILLI);

        warehouse_rows_loaded = 0;

        for (w_id = (short)aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
    {
        MakeAlphaString(6,10, W_NAME_LEN, w_name);

        MakeAddress(w_street_1, w_street_2, w_city, w_state,
w_zip);

        w_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        w_ytd = 300000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        warehouse_rows_loaded++;
        CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded,
"warehouse", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading warehouse table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxwarcl");

    stock_rows_loaded = 0;

```

```

district_rows_loaded = 0;

District();
Stock();

}

//-----
//
// Function : District
//
//=====

void District()
{
    short      d_id;
    short      d_w_id;
    char       d_name[D_NAME_LEN+1];
    char       d_street_1[ADDRESS_LEN+1];
    char       d_street_2[ADDRESS_LEN+1];
    char       d_city[ADDRESS_LEN+1];
    char       d_state[STATE_LEN+1];
    char       d_zip[ZIP_LEN+1];
    double     d_tax;
    double     d_ytd;
    char       name[20];
    long       d_next_o_id;
    long       time_start;
    int        w_id;
    RETCODE   rc;
    DBINT    rcint;
    char      bcphint[128];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
    sprintf(name, "%s..%s", aptr->database, "district");

    rc = bcp_init(w_hdbc1, name, NULL, "logs\\district.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (d_w_id, d_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 10));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }
}

```

```

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 2);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0,
3);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL,
0, 0, 4);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL,
0, 0, 5);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0,
0, 6);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0,
7);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, 8);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 10);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT4, 11);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        d_ytd = 30000.0;

        d_next_o_id = orders_per_district+1;

        time_start = (TimeNow() / MILLI);

```

```

        for (w_id = aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)
        {
            d_w_id = w_id;

            for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
            {
                MakeAlphaString(6,10,D_NAME_LEN, d_name);

                MakeAddress(d_street_1, d_street_2, d_city,
d_state, d_zip);

                d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

                rc = bcp_sendrow(w_hdbc1);
                if (rc != SUCCEED)
                    HandleErrorDBC(w_hdbc1);

                district_rows_loaded++;
                CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
            }
        }

        rcint = bcp_done(w_hdbc1);
        if (rcint < 0)
            HandleErrorDBC(w_hdbc1);

        printf("Finished loading district table.\n");

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxdisc1");

        return;
    }

//=====
// Function : Stock
//=====
void Stock()
{
    long      s_i_id;
    short     s_w_id;
    short     s_quantity;
    char      s_dist_01[S_DIST_LEN+1];
    char      s_dist_02[S_DIST_LEN+1];
    char      s_dist_03[S_DIST_LEN+1];
    char      s_dist_04[S_DIST_LEN+1];
    char      s_dist_05[S_DIST_LEN+1];
    char      s_dist_06[S_DIST_LEN+1];
    char      s_dist_07[S_DIST_LEN+1];
    char      s_dist_08[S_DIST_LEN+1];
    char      s_dist_09[S_DIST_LEN+1];
    char      s_dist_10[S_DIST_LEN+1];
    long      s_ytd;
    short     s_order_cnt;
}

```

```

short      s_remote_cnt;
char       s_data[S_DATA_LEN+1];
short      len;
char       name[20];
long       time_start;
RETCODE    rc;
DBINT     rcount;
char       bcphint[128];

// Seed with unique number
seed(3);

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxstkcl");

sprintf(name, "%s..%s", aptr->database, "stock");

rc = bcp_init(w_hdbc1, name, NULL, "logs\\stock.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 3);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0,
0, 4);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0,
0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0,
0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0,
0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0,
0, 8);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0,
0, 9);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0,
0, 10);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0,
0, 11);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0,
0, 12);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0,
0, 13);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, 14);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 15);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 16);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, S_DATA_LEN, NULL, 0, 0,
17);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;
time_start = (TimeNow() / MILLI);
printf("...Loading stock table\n");

```

```

for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (short)aptr->starting_warehouse; s_w_id <=
aptr->num_warehouses; s_w_id++)
    {

        s_quantity = (short)RandomNumber(10L,100L);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);

        len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        stock_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1,
stock_rows_loaded, "stock", &time_start);
    }
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading stock table.\n");

SQLFreeStmt(w_hstmt1, SQL_DROP);
SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstkcl");

return;
}

//=====================================================================
// Function      : LoadCustomer
//=====================================================================

void LoadCustomer()
{
    LOADER_TIME_STRUCT      customer_time_start;
    LOADER_TIME_STRUCT      history_time_start;
}

```

```

short          w_id;
short          d_id;
DWORD         dwThreadID[MAX_CUSTOMER_THREADS];
HANDLE        hThread[MAX_CUSTOMER_THREADS];
char          name[20];
RETCODE        rc;
char          rcint;
char          bcphint[128];
char          cmd[256];
char          rc_1;
recnum, MsgLen;
SqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
NativeError;

// Seed with unique number
seed(5);

printf("Loading customer and history tables...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxcuscl");

// Initialize bulk copy
sprintf(name, "%s..%s", aptr->database, "customer");

rc = bcp_init(c_hdbc1, name, NULL, "logs\\customer.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
}

sprintf(name, "%s..%s", aptr->database, "history");

rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

sprintf(bcphint, "tablock");
rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

customer_rows_loaded      = 0;
history_rows_loaded       = 0;

CustomerBufInit();

customer_time_start.time_start = (TimeNow() / MILLI);
history_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (short)aptr->starting_warehouse; w_id <= aptr-
>num_warehouses; w_id++)

```

```

{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id, w_id);

        // Start parallel loading threads here...

        // Start customer table thread

        printf("...Loading customer table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,
                                  0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
                                  0,
&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // Start History table thread

        printf("...Loading history table for: d_id = %d,
w_id = %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,
                                  0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
                                  0,
&dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }

        WaitForSingleObject( hThread[0], INFINITE );
        WaitForSingleObject( hThread[1], INFINITE );

        if (CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
        }
}

```

```

if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
}

}

// flush the bulk connection
rcint = bcp_done(c_hdmc1);
if (rcint < 0)
    HandleErrorDBC(c_hdmc1);

rcint = bcp_done(c_hdmc2);
if (rcint < 0)
    HandleErrorDBC(c_hdmc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxcuscl");

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID =
1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "isql -S%s -U%s -P%s -d%s -e -Q\"update customer set
c_first = 'C_LOAD = %d' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" >
logs\\nurand_load.log",
aptr->server,
aptr->user,
aptr->password,
aptr->database,
LOADER_NURAND_C);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdmc1);
SQLFreeConnect(c_hdmc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdmc2);
SQLFreeConnect(c_hdmc2);

return;
}

=====

// Function      : CustomerBufInit

```

```

//=====
void CustomerBufInit()
{
    int i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount = (float) 0;

        // fix to avoid ODBC float to numeric conversion problem.
        // customer_buf[i].c_balance = 0;
        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment = 0;
        customer_buf[i].c_payment_cnt = 0;
        customer_buf[i].c_delivery_cnt = 0;

        strcpy(customer_buf[i].c_data,"");
        customer_buf[i].h_amount = 0;
        strcpy(customer_buf[i].h_data,"");
    }
}

//=====
// Function : CustomerBufLoad
// Fills shared buffer for HISTORY and CUSTOMER
//=====

void CustomerBufLoad(int d_id, int w_id)
{
    long i;
    CUSTOMER_SORT_STRUCT c[CUSTOMERS_PER_DISTRICT];

    for (i=0;i<customers_per_district;i++)
}

```

```

{
    if (i < 1000)
        LastName(i, c[i].c_last);
    else
        LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

    MakeAlphaString(8,16,FIRST_NAME_LEN, c[i].c_first);
    c[i].c_id = i+1;

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;

        customer_buf[i].c_ytd_payment = 10.0;
        customer_buf[i].c_payment_cnt = 1;
        customer_buf[i].c_delivery_cnt = 0;

        // Generate CUSTOMER and HISTORY data
        customer_buf[i].c_id = c[i].c_id;
        strcpy(customer_buf[i].c_first, c[i].c_first);
        strcpy(customer_buf[i].c_last, c[i].c_last);

        customer_buf[i].c_middle[0] = 'O';
        customer_buf[i].c_middle[1] = 'E';

        MakeAddress(customer_buf[i].c_street_1,
                    customer_buf[i].c_street_2,
                    customer_buf[i].c_city,
                    customer_buf[i].c_state,
                    customer_buf[i].c_zip);

        MakeNumberString(16, 16, PHONE_LEN,
customer_buf[i].c_phone);

        if (RandomNumber(1L, 100L) > 10)
            customer_buf[i].c_credit[0] = 'G';
        else
            customer_buf[i].c_credit[0] = 'B';
        customer_buf[i].c_credit[1] = 'C';

        customer_buf[i].c_credit_lim = 50000.0;
        customer_buf[i].c_discount = ((float) RandomNumber(0L,
5000L)) / 10000.0;

        // fix to avoid ODBC float to numeric conversion problem.

        // customer_buf[i].c_balance = -10.0;
        strcpy(customer_buf[i].c_balance,"-10.0");
    }
}

```

```

        MakeAlphaString(500, 500, C_DATA_LEN,
customer_buf[i].c_data);

        // Generate HISTORY data
        MakeAlphaString(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
    }

//=====
// Function : LoadCustomerTable
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    int          i;
    long         c_id;
    short        c_d_id;
    short        c_w_id;
    char         c_first[FIRST_NAME_LEN+1];
    char         c_middle[MIDDLE_NAME_LEN+1];
    char         c_last[LAST_NAME_LEN+1];
    char         c_street_1[ADDRESS_LEN+1];
    char         c_street_2[ADDRESS_LEN+1];
    char         c_city[ADDRESS_LEN+1];
    char         c_state[STATE_LEN+1];
    char         c_zip[ZIP_LEN+1];
    char         c_phone[PHONE_LEN+1];
    char         c_credit[CREDIT_LEN+1];
    double       c_credit_lim;
    double       c_discount;

    // fix to avoid ODBC float to numeric conversion problem.

    // double           c_balance;
    char          c_balance[6];

    double       c_ytd_payment;
    short        c_payment_cnt;
    short        c_delivery_cnt;
    char         c_data[C_DATA_LEN+1];
    char          c_since[C_SINCE_LEN+1];
    RETCODE      rc;

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 3);
    if (rc != SUCCEED)

```

```

        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0,
0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0,
0, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0,
6);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0,
0, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
8);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0,
9);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0,
10);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, 11);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0,
12);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, 13);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0,
14);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 15);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

```

```

rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 16);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

// fix to avoid ODBC float to numeric conversion problem.

// rc = bcp_bind(c_hdbc1, (BYTE *) &c_balance, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 17);
// if (rc != SUCCEED)
//     HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0,
SQLCHARACTER, 17);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA,
NULL, 0, SQLFLT8, 18);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 19);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 20);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500, NULL, 0, 0, 21);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;

    strcpy(c_first, customer_buf[i].c_first);
    strcpy(c_middle, customer_buf[i].c_middle);
    strcpy(c_last, customer_buf[i].c_last);
    strcpy(c_street_1, customer_buf[i].c_street_1);
    strcpy(c_street_2, customer_buf[i].c_street_2);
    strcpy(c_city, customer_buf[i].c_city);
    strcpy(c_state, customer_buf[i].c_state);
    strcpy(c_zip, customer_buf[i].c_zip);
    strcpy(c_phone, customer_buf[i].c_phone);
    strcpy(c_credit, customer_buf[i].c_credit);

    FormatDate(&c_since);

    c_credit_lim = customer_buf[i].c_credit_lim;
    c_discount = customer_buf[i].c_discount;

    // fix to avoid ODBC float to numeric conversion problem.
}

```

```

// c_balance = customer_buf[i].c_balance;
strcpy(c_balance, customer_buf[i].c_balance);

c_ytd_payment = customer_buf[i].c_ytd_payment;
c_payment_cnt = customer_buf[i].c_payment_cnt;
c_delivery_cnt = customer_buf[i].c_delivery_cnt;

strcpy(c_data, customer_buf[i].c_data);

// Send data to server
rc = bcp_sendrow(c_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

customer_rows_loaded++;
CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
}

//=====================================================================
// Function      : LoadHistoryTable
//=====================================================================

void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    int          i;
    long         c_id;
    short        c_d_id;
    short        c_w_id;
    double       h_amount;
    char         h_data[H_DATA_LEN+1];
    char         h_date[H_DATE_LEN+1];
    RETCODE      rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 5);
}

```

```

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, 6);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 7);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, 8);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;
    h_amount = customer_buf[i].h_amount;
    strcpy(h_data, customer_buf[i].h_data);

    FormatDate(&h_date);

    // send to server
    rc = bcp_sendrow(c_hdbc2);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    history_rows_loaded++;
    CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
}

//=====
// Function : LoadOrders
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT      orders_time_start;
    LOADER_TIME_STRUCT      new_order_time_start;
    LOADER_TIME_STRUCT      order_line_time_start;
    short                   w_id;
    short                   d_id;
    DWORD                  dwThreadID[MAX_ORDER_THREADS];
    HANDLE                 hThread[MAX_ORDER_THREADS];
    name[20];
    rc;
    bcphint[128];
}

```

```

// seed with unique number
seed(6);

printf("Loading orders...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    BuildIndex("idxordcl");
    BuildIndex("idxnodcl");
    BuildIndex("idxodlcl");
}

// initialize bulk copy
sprintf(name, "%s..%s", aptr->database, "orders");

rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
}

sprintf(name, "%s..%s", aptr->database, "new_order");

rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (no_w_id, no_d_id,
no_o_id), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
    rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
}

sprintf(name, "%s..%s", aptr->database, "order_line");

rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id,
ol_o_id, ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses *
300000));
    rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

orders_rows_loaded = 0;

```

```

new_order_rows_loaded = 0;
order_line_rows_loaded = 0;

OrdersBufInit();

orders_time_start.time_start = (TimeNow() / MILLI);
new_order_time_start.time_start = (TimeNow() / MILLI);
order_line_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (short)aptr->starting_warehouse; w_id <= aptr->num_warehouses; w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        OrdersBufLoad(d_id, w_id);

        // start parallel loading threads here...

        // start Orders table thread

        printf("...Loading Order Table for: d_id = %d, w_id = %d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,
                                  0,
                                  (LPTHREAD_START_ROUTINE) LoadOrdersTable,
                                  &orders_time_start,
                                  0,
                                  &dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating thread = 0.\n");
            exit(-1);
        }

        // start NewOrder table thread

        printf("...Loading New-Order Table for: d_id = %d, w_id = %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,
                                  0,
                                  (LPTHREAD_START_ROUTINE) LoadNewOrderTable,
                                  &new_order_time_start,
                                  0,
                                  &dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating thread = 1.\n");
            exit(-1);
        }
    }
}

}

// start Order-Line table thread

printf("...Loading Order-Line Table for: d_id = %d, w_id = %d\n", d_id, w_id);

hThread[2] = CreateThread(NULL,
                          0,
                          (LPTHREAD_START_ROUTINE) LoadOrderLineTable,
                          &order_line_time_start,
                          0,
                          &dwThreadID[2]);

if (hThread[2] == NULL)
{
    printf("Error, failed in creating creating thread = 2.\n");
    exit(-1);
}

WaitForSingleObject( hThread[0], INFINITE );
WaitForSingleObject( hThread[1], INFINITE );
WaitForSingleObject( hThread[2], INFINITE );

if (CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in closing Orders thread handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing NewOrder thread handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[2]) == FALSE)
{
    printf("Error, failed in closing OrderLine thread handle with errno: %d\n", GetLastError());
}

printf("Finished loading orders.\n");

return;
}

//=====================================================================
// Function     : OrdersBufInit
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE

```

```

//=====
void OrdersBufInit()
{
    int      i;
    int          j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o.ol_cnt = 0;
        orders_buf[i].o.all_local = 0;

        for (j=0;j<=14;j++)
        {
            orders_buf[i].o.ol[j].ol = 0;
            orders_buf[i].o.ol[j].ol_i_id = 0;
            orders_buf[i].o.ol[j].ol_supply_w_id = 0;
            orders_buf[i].o.ol[j].ol_quantity = 0;
            orders_buf[i].o.ol[j].ol_amount = 0;
            strcpy(orders_buf[i].o.ol[j].ol_dist_info,"");
        }
    }

}

//=====
// Function  : OrdersBufLoad
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//=====
void OrdersBufLoad(int d_id, int w_id)
{
    int      cust[ORDERS_PER_DIST+1];
    long     o_id;
    short    ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    GetPermutation(cust, ORDERS_PER_DIST);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data
        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
    }
}

```

```

orders_buf[o_id].o_c_id = cust[o_id+1];
orders_buf[o_id].o.ol_cnt = (short)RandomNumber(5L, 15L);

if (o_id < first_new_order)
{
    orders_buf[o_id].o_carrier_id =
(RandomNumber(1L, 10L));
    orders_buf[o_id].o.all_local = 1;
}
else
{
    orders_buf[o_id].o_carrier_id = 0;
    orders_buf[o_id].o.all_local = 1;
}

for (ol=0; ol<orders_buf[o_id].o.ol_cnt; ol++)
{
    orders_buf[o_id].o.ol[ol].ol = ol+1;
    orders_buf[o_id].o.ol[ol].ol_i_id =
RandomNumber(1L, max_items);
    orders_buf[o_id].o.ol[ol].ol_supply_w_id = w_id;
    orders_buf[o_id].o.ol[ol].ol_quantity = 5;
    MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o.ol[ol].ol_dist_info);

    // Generate ORDER-LINE data
    if (o_id < first_new_order)
    {
        orders_buf[o_id].o.ol[ol].ol_amount = 0;
        // Added to insure ol_delivery_d set
properly during load

        FormatDate(&orders_buf[o_id].o.ol[ol].ol_delivery_d);

    }
    else
    {
        orders_buf[o_id].o.ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
        // Added to insure ol_delivery_d set
properly during load

        // odbc datetime format
        strcpy(orders_buf[o_id].o.ol[ol].ol_delivery_d,"1899-12-31
12:00:00.000");
    }
}

//=====
// Function  : LoadOrdersTable
//=====

```

```

void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int          i;
    long         o_id;
    short        o_d_id;
    short        o_w_id;
    long         o_c_id;
    short        o_carrier_id;
    short        o.ol_cnt;
    short        o.all_local;
    char         o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE      rc;
    DBINT       rcint;

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d, 0, O_ENTRY_D_LEN,
NULL, 0, SQLCHARACTER, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o.ol_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o.all_local, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id          = orders_buf[i].o_id;
        o_d_id        = orders_buf[i].o_d_id;
        o_w_id        = orders_buf[i].o_w_id;
        o_c_id        = orders_buf[i].o_c_id;

```

```

        o_carrier_id = orders_buf[i].o_carrier_id;
        o.ol_cnt     = orders_buf[i].o.ol_cnt;
        o.all_local  = orders_buf[i].o.all_local;

        FormatDate(&o_entry_d);

        // send data to server
        rc = bcp_sendrow(o_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        orders_rows_loaded++;
        CheckForCommit(o_hdbc1, o.hstmt1, orders_rows_loaded,
"orders", &orders_time_start->time_start);
    }

    // rcint = bcp_batch(o_hdbc1);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc1);

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc1);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc1);

        SQLFreeStmt(o_hstmt1, SQL_DROP);
        SQLDisconnect(o_hdbc1);
        SQLFreeConnect(o_hdbc1);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxordcl");

        // build non-clustered index
        if (aptr->build_index == 1)
            BuildIndex("idxordnc");
    }
}

//=====
// Function   : LoadNewOrderTable
//=====

void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    int          i;
    long         o_id;
    short        o_d_id;
    short        o_w_id;
    RETCODE      rc;
    DBINT       rcint;

    // Bind NEW-ORDER data
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);

```

```

        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        for (i = first_new_order; i < last_new_order; i++)
        {
            o_id      = orders_buf[i].o_id;
            o_d_id    = orders_buf[i].o_d_id;
            o_w_id    = orders_buf[i].o_w_id;

            rc = bcp_sendrow(o_hdbc2);
            if (rc != SUCCEED)
                HandleErrorDBC(o_hdbc2);

            new_order_rows_loaded++;
            CheckForCommit(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
        }

        // rcount = bcp_batch(o_hdbc2);
        // if (rcint < 0)
        //     HandleErrorDBC(o_hdbc2);

        if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
        {
            rcount = bcp_done(o_hdbc2);
            if (rcint < 0)
                HandleErrorDBC(o_hdbc2);

            SQLFreeStmt(o_hstmt2, SQL_DROP);
            SQLDisconnect(o_hdbc2);
            SQLFreeConnect(o_hdbc2);

            // if build index after load...
            if ((aptr->build_index == 1) && (aptr->index_order == 0))
                BuildIndex("idxnodcl");
        }
    }

//=====
// Function : LoadOrderLineTable
//=====
void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    int          i,j;
    long         o_id;

```

```

        short       o_d_id;
        short       o_w_id;
        long        ol;
        long        ol_i_id;
        short       ol_supply_w_id;
        short       ol_quantity;
        double      ol_amount;
        char        ol_dist_info[DIST_INFO_LEN+1];
        char        ol_delivery_d[OL_DELIVERY_D_LEN+1];
        RETCODE     rc;
        DBINT      rcount;

        // bind ORDER-LINE data
        rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 1);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 2);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, 3);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 4);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, 5);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 6);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0,
OL_DELIVERY_D_LEN, NULL, 0, SQLCHARACTER, 7);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA,
NULL, 0, SQLINT2, 8);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL,
0, SQLFLT8, 9);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL,
0, 0, 10);
        if (rc != SUCCEED)

```

```

HandleErrorDBC(o_hdbc3);

for (i = 0; i < orders_per_district; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;

    for (j=0; j < orders_buf[i].o.ol_cnt; j++)
    {
        ol          = orders_buf[i].o.ol[j].ol;
        ol_i_id     = orders_buf[i].o.ol[j].ol_i_id;
        ol_supply_w_id =
orders_buf[i].o.ol[j].ol_supply_w_id;
        ol_quantity  = orders_buf[i].o.ol[j].ol_quantity;
        ol_amount    = orders_buf[i].o.ol[j].ol_amount;

        strcpy(ol_delivery_d,orders_buf[i].o.ol[j].ol_delivery_d);

        strcpy(ol_dist_info,orders_buf[i].o.ol[j].ol_dist_info);
        rc = bcp_sendrow(o_hdbc3);
        if (rc != SUCEED)
            HandleErrorDBC(o_hdbc3);

        order_line_rows_loaded++;
        CheckForCommit(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
    }

    // rcint = bcp_batch(o_hdbc3);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc3);

    if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc3);
        if (rcint < 0)
            HandleErrorDBC(o_hdbc3);

        SQLFreeStmt(o_hstmt3, SQL_DROP);
        SQLDisconnect(o_hdbc3);
        SQLFreeConnect(o_hdbc3);

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr->index_order == 0))
            BuildIndex("idxodlcl");
    }
}

//=====
// Function : GetPermutation
//
```

```

//=====================================================================
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====================================================================
// Function : CheckForCommit
//=====================================================================

void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    int rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long      time_end, time_diff;
    // DBINT      rcint;

    if ( !(rows_loaded % aptr->batch) )
    {
        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;

        printf("-> Loaded %ld rows into %s in %ld sec - Total = %d
(%2f rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff
               : 1L));
        *time_start = time_end;
    }
    return;
}

```

```

//=====
// Function : OpenConnections
//=====
void OpenConnections()
{
    RETCODE          rc;
    char             szDriverString[300];
    char             szDriverStringOut[1024];
    SQLSMALLINT      cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0
);

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connections to SQL Server

    // Connection 1

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
}

```

```

rc = SQLDriverConnect ( i_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0]
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0] ,
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

// Connection 2

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = SQLDriverConnect ( w_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0] ,
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

// Connection 3

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = SQLDriverConnect ( c_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,

```

```

(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
);

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

// Connection 4

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0] ,
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT
);

if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

// Connection 5

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0] ,
sizeof(szDriverStringOut),

```

```

sizeof(szDriverStringOut) ,
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT
);

if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

// Connection 6

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0] ,
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT
);

if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

// Connection 7

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr-
>pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0] ,
sizeof(szDriverStringOut),
&cbDriverStringOut,

```

```

);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
}

//=====
// Function name: BuildIndex
//=====
void BuildIndex(char *index_script)
{
    char cmd[256];
    printf("Starting index creation: %s\n", index_script);

    sprintf(cmd, "isql -S%s -U%s -P%s -e -i%s\\%s.sql > logs\\%s.log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->index_script_path,
            index_script,
            index_script);

    system(cmd);

    printf("Finished index creation: %s\n", index_script);
}

void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR      SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER   NativeError;
    SQLSMALLINT  i, MsgLen;
    SQLRETURN    rc2;
    char         timebuf[128];
    char         datebuf[128];
    FILE        *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
&NativeError,
                               Msg, sizeof(Msg) , &MsgLen )) !=
SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" , Msg );

        _strftime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n" , datebuf, timebuf, szLastError);

        fp1 = fopen("logs\\tpccldr.err", "w");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
    }
    else
    {
        fprintf(fp1, "[%s : %s] %s\n" , datebuf, timebuf,
szLastError);
        fclose(fp1);
    }
    i++;
}
}

void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );
    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000" , &when );

    return;
}

```



## **Appendix C - Tunable Parameters**

### **Microsoft SQL Server Startup Parameters**

```
C:\MSSQL\BINN\SQLSERVR.EXE -c -x -t3502
```

Where:

- -c Start SQL Server independently of the Service Control Manager
- -x Disables the keeping of CPU time and cache hit ratio statistics
- -t3502 Writes a message to the SQL Server Errorlog showing the beginning and ending time of each checkpoint

### **SQL Server Stack Size**

The default stack size for Microsoft SQL Server 7.0 was changed using the EDITBIN utility. The EDITBIN utility ships with Microsoft Visual C++ V4.0. The command used to change the stack size is:

```
editbin /S: 131072 sqlservr.exe
```

This command is fully documented as an article in the Microsoft Knowledge Base on the Microsoft Web Site at [www.microsoft.com/support](http://www.microsoft.com/support).

### **BOOT.INI**

The /3gb switch was added to the boot.ini file to cause Windows NT Enterprise Edition to allow 3GB of user and 1GB of kernel virtual address space, rather than the usual 2GB of virtual address space for each.

### **Microsoft SQL Server Configuration Parameters**

```
1> 2> 3> 4> 5> 6> 7> 8> 9> 10> 11>
-- File:      VERSION.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Returns SQL Server version string
```

```
print " "
select convert(char(30), getdate(),9)
print " "

-----
Nov  2 1998  1:15:30:030PM
(1 row affected)

1> 2> 3>
select @@version

-----
-----
```

-----  
-----  
-----  
-----  
-----  
-----  
-----  
-----

```
Microsoft SQL Server 7.00 - 7.00.549 (Intel X86)
Aug 18 1998 15:05:22
Copyright (c) 1988-1998 Microsoft Corporation
Enterprise Edition on Windows NT 4.0 (Build 1381: Service Pack 4, RC 1.99)
```

```
(1 row affected)
1> 2>
1> 2> 3> 4> 5> 6> 7> 8> 9> 10>
-- File:      CONFIG.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.00
--           Copyright Microsoft, 1996
-- Purpose:   Collects SQL Server configuration parameters

print " "
select convert(char(30), getdate(),9)
print " "

-----
Nov  2 1998  1:15:31:920PM
(1 row affected)

1> 2> 3> DBCC execution completed. If DBCC printed error messages, contact your system administrator.
```

Configuration option changed. Run the RECONFIGURE statement to install.

```
sp_configure "show advanced",1
1> 2> reconfigure with override
1> 2> sp_configure
  name
minimum      maximum      config_value run_value
----- -----
affinity mask
0 2147483647      15      15
allow updates
0      1      0      0
cost threshold for parallelism
0 32767      5      5
cursor threshold
-1 2147483647      -1      -1
default language
0 9999      0      0
default sortorder id
0 255      50      50
extended memory size (MB)
0 2147483647      0      0
fill factor (%)
0 100      0      0
index create memory (KB)
704 1600000      0      0
language in cache
3      100      3      3
lightweight pooling
0      1      1      1
locks
5000 2147483647      0      0
max async IO
1      255      255      255
max degree of parallelism
0 32      1      1
max server memory (MB)
4 2147483647 2147483647 2147483647
max text repl size (B)
0 2147483647 65536 65536
max worker threads
10 1024      232      232
media retention
0 365      0      0
min memory per query (KB)
512 2147483647 512 512
min server memory (MB)
0 2147483647      0      0
nested triggers
0      1      0      0
network packet size (B)
512 65535 4096 4096
open objects
0 2147483647      0      0
priority boost
0      1      1      1
query governor cost limit
0 2147483647      0      0
```

```
query wait (s)
-1 2147483647      -1      -1
recovery interval (min)
0 32767 32767 32767
remote access
0      1      0      0
remote login timeout (s)
0 2147483647 30 30
remote proc trans
0      1      0      0
remote query timeout (s)
0 2147483647 0 0
resource timeout (s)
5 2147483647 10 10
scan for startup procs
0      1      0      0
set working set size
0      1      0      0
show advanced options
0      1      1      1
spin counter
1 2147483647 10000 10000
time slice (ms)
50 1000 100 100
Unicode comparison style
0 2147483647 0 0
Unicode locale id
0 2147483647 33280 33280
user connections
0 32767 270 270
user options
0 4095 0 0
```

1>

## Internal RAID Configuration Parameters

```
*****
*          MYLEX Disk Array Controller - Configuration Utility
*
*                                Version 4.76
*
*****
CONFIGURATION INFORMATION OF :
=====
3 Channel - 15 Target DAC1164P #1 Firmware version 5.06

PHYSICAL PACK INFORMATION :
=====
Number of Packs = 1
```

```

Pack 0 : [0:0] [1:0]

SYSTEM DRIVE INFORMATION :
=====

Number of System Drives = 1

Sys Drv # Phy. Size Raid Level Eff. Size Write Policy
===== ====== ====== ====== ======
0 104194 MB 1 52097 MB Write Thru

*****
*      MYLEX Disk Array Controller - Configuration Utility
*
*          Version 4.76
*

*****  

CONFIGURATION INFORMATION OF :
=====

3 Channel - 15 Target DAC1164P #2 Firmware version 5.06

PHYSICAL PACK INFORMATION :
=====

Number of Packs = 4

Pack 0 : [0:0] [0:1] [0:2] [0:3] [0:4] [0:5] [0:6]
Pack 1 : [0:8] [0:9] [0:10] [0:11] [0:12] [0:13] [0:14]
Pack 2 : [1:0] [1:1] [1:2] [1:3] [1:4] [1:5] [1:6]
Pack 3 : [1:8] [1:9] [1:10] [1:11] [1:12] [1:13] [1:14]

SYSTEM DRIVE INFORMATION :
=====

Number of System Drives = 1

Sys Drv # Phy. Size Raid Level Eff. Size Write Policy
===== ====== ====== ====== ======
0 243124 MB 0 243124 MB Write Thru

*****
*      MYLEX Disk Array Controller - Configuration Utility
*
*          Version 4.76
*

*****  

CONFIGURATION INFORMATION OF :
=====
```

```

3 Channel - 15 Target DAC1164P #3 Firmware version 5.06

PHYSICAL PACK INFORMATION :
=====

Number of Packs = 5

Pack 0 : [0:0] [0:1] [0:2] [0:3] [0:4] [0:5] [0:6]
Pack 1 : [0:8] [0:9] [0:10] [0:11] [0:12] [0:13] [0:14]
Pack 2 : [1:0] [1:1] [1:2] [1:3] [1:4] [1:5] [1:6]
Pack 3 : [1:8] [1:9] [1:10] [1:11] [1:12] [1:13] [1:14]
Pack 4 : [2:0] [2:1] [2:2] [2:3] [2:4] [2:5] [2:6] [2:8]

SYSTEM DRIVE INFORMATION :
=====

Number of System Drives = 2

Sys Drv # Phy. Size Raid Level Eff. Size Write Policy
===== ====== ====== ====== ======
0 243124 MB 0 243124 MB Write Thru
1 69464 MB 5 60781 MB Write Back

*****
*      MYLEX Disk Array Controller - Configuration Utility
*
*          Version 4.76
*

*****  

CONFIGURATION INFORMATION OF :
=====

3 Channel - 15 Target DAC1164P #4 Firmware version 5.06

PHYSICAL PACK INFORMATION :
=====

Number of Packs = 4

Pack 0 : [0:0] [0:1] [0:2] [0:3] [0:4] [0:5] [0:6]
Pack 1 : [0:8] [0:9] [0:10] [0:11] [0:12] [0:13] [0:14]
Pack 2 : [1:0] [1:1] [1:2] [1:3] [1:4] [1:5] [1:6]
Pack 3 : [1:8] [1:9] [1:10] [1:11] [1:12] [1:13] [1:14]

SYSTEM DRIVE INFORMATION :
=====

Number of System Drives = 1

Sys Drv # Phy. Size Raid Level Eff. Size Write Policy
===== ====== ====== ====== ======
0 243124 MB 0 243124 MB Write Thru
```

```
*****
*          MYLEX Disk Array Controller - Configuration Utility
*
*                      Version 4.76
*****
CONFIGURATION INFORMATION OF :
=====
3 Channel - 15 Target  DAC1164P #5    Firmware version 5.06

PHYSICAL PACK INFORMATION :
=====
Number of Packs = 4

Pack 0 : [0:0]  [0:1]  [0:2]  [0:3]  [0:4]  [0:5]  [0:6]
Pack 1 : [0:8]  [0:9]  [0:10] [0:11] [0:12] [0:13] [0:14]
Pack 2 : [1:0]  [1:1]  [1:2]  [1:3]  [1:4]  [1:5]  [1:6]
Pack 3 : [1:8]  [1:9]  [1:10] [1:11] [1:12] [1:13] [1:14]

SYSTEM DRIVE INFORMATION :
=====
Number of System Drives = 1

Sys Drv #  Phy. Size  Raid Level  Eff. Size  Write Policy
=====  ======  =====  ======  ======  ======
      0     243124 MB       0        243124 MB  Write Thru

*****
*          MYLEX Disk Array Controller - Configuration Utility
*
*                      Version 4.76
*
*****
CONFIGURATION INFORMATION OF :
=====
3 Channel - 15 Target  DAC1164P #6    Firmware version 5.06

PHYSICAL PACK INFORMATION :
=====
Number of Packs = 5

Pack 0 : [0:0]  [0:1]  [0:2]  [0:3]  [0:4]  [0:5]  [0:6]
Pack 1 : [0:8]  [0:9]  [0:10] [0:11] [0:12] [0:13] [0:14]
Pack 2 : [1:0]  [1:1]  [1:2]  [1:3]  [1:4]  [1:5]  [1:6]
```

```
Pack 3 : [1:8]  [1:9]  [1:10] [1:11] [1:12] [1:13] [1:14]
Pack 4 : [2:0]  [2:1]  [2:2]  [2:3]  [2:4]  [2:5]  [2:6]  [2:8]

SYSTEM DRIVE INFORMATION :
=====
Number of System Drives = 2

Sys Drv #  Phy. Size  Raid Level  Eff. Size  Write Policy
=====  ======  =====  ======  ======  ======
      0     243124 MB       0        243124 MB  Write Thru
      1     69464  MB       5         60781 MB  Write Back
```

## External RAID Configuration Parameters

```
*****
*          Unisys Ultra-Wide RAID Controller  OSM1000-C32
*
*****
CPU type:      5x86-133 (WB)
Firmware version 1.31G
Bootcode version 1.12B
Total cache:  32 MB
- Cache      Write Back:           enabled
              optimization:        sequential (128K stripe size)
- Raid       Rebuild Priority:    low
              Write Priority:       on Initialization: disabled
                                      on Rebuild:        disabled
                                      on Normal:         disabled
```

### Logical Volume Partition table

Volume ID	Capacity	RAID	# drives:
ID1	52098 MB	0	6

### Host LUN Assignment

SCSI Chl	LUN	LVIDx	PortIdx	Capacity
0	0	0	0	52098 MB

### Physical Drives

Id	Slot	Chl	Id	Capacity	Status	XferRate	Vendor/Product
		Firmware					
00640ST19101W	0	0	8B04	8683 MB	online	41.7 MB	UNISYS
00640ST19101W	0	1	8B04	8683 MB	online	41.7 MB	UNISYS

00640ST19101W	0	2	8683 MB	online	41.7 MB	UNISYS
	8B04					
00640ST19101W	0	3	8683 MB	online	41.7 MB	UNISYS
	8B04					
00640ST19101W	0	4	8683 MB	online	41.7 MB	UNISYS
	8B04					
00640ST19101W	0	5	8683 MB	online	41.7 MB	UNISYS
	8B04					

## Configuration of Log Drives

A single Mylex DAC1164P RAID controller was used in the SUT for the mirrored log drives. Half of the drives were in one disk cage connected to one channel of the controller and half were in a second disk cage connected to a second channel of the controller. The controller implemented the RAID 1 mirroring across the two channels. Write caching was disabled on both the controller and on all the physical drives themselves.

One OSM1000-100 SCSI-to-SCSI RAID controller was used in each of the two log disk cages. Each of these controllers implemented RAID 0 striping on the six 9GB drives that were in each disk cage, so that the Mylex controller in the SUT saw just two large 'disks'. Each of the IFT controllers had a 32MB cache. Configuration options were set for Write Back caching and Optimized for Sequential IO. The IFT controllers used an algorithm that ensured that cached write data was held for no more than a fraction of a minute before being written to the physical drives.

For the priced configuration, each of the disk cages contained two redundant power supplies. Only one was required to be functional to keep the ITF controller and disk drives operational. A UPS was priced to provide power to one power supply in each disk cage. The second power supply in each disk cage was connected to normal wall power. Thus neither interruption of power or failure of the UPS would affect the two log disk cages (or their IFT controllers and disks). Since the two disk cages were completely independent of each other, this configuration ensured that there was no single point of failure in writing to the log.

## NT Server Configuration Information

```
Microsoft Diagnostics Report For \\AVALON4
-----
OS Version Report
-----
Microsoft (R) Windows NT (TM) Server
Version 4.0 (Build 1381: Service Pack 4, RC 1.99) x86 Multiprocessor Free
Registered Owner: SAM&M, Unisys Corporation
Product Number: 70234-810-6895975-67328
-----

System Report
-----
System: AT/AT COMPATIBLE
Hardware Abstraction Layer: MPS 1.4 - APIC platform
BIOS Date: 09/02/98
BIOS Version: SC450NX - PhoenixBIOS 4.0 Releas

Processor list:
0: x86 Family 6 Model 5 Stepping 2 GenuineIntel ~400 Mhz
1: x86 Family 6 Model 5 Stepping 2 GenuineIntel ~400 Mhz
2: x86 Family 6 Model 5 Stepping 2 GenuineIntel ~400 Mhz
3: x86 Family 6 Model 5 Stepping 2 GenuineIntel ~400 Mhz
-----

Video Display Report
-----
BIOS Date: 06/05/97
BIOS Version: CL-GD5480 PCI VGA BIOS Version 1.00

Adapter:
Setting: 1024 x 768 x 65536
          75 Hz
Type: cirrus compatible display adapter
String: Cirrus Logic Compatible
Memory: 2 MB
Chip Type: Cirrus Logic 5446
DAC Type: Integrated RAMDAC

Driver:
Vendor: Microsoft Corporation
File(s): cirrus.sys, vga.dll, cirrus.dll, vga256.dll, vga64K.dll
Version: 4.00, 4.0.0

Drives Report
-----
C:\ (Local - FAT) SYSTEM Total: 2,096,160KB, Free: 1,055,424KB
  Serial Number: F035 - 8AA4
  Bytes per cluster: 512
  Sectors per cluster: 64
  Filename length: 255
R:\ (Local - NTFS) BACK1 Total: 62,239,724KB, Free: 2,631,304KB
  Serial Number: 8834 - 444B
  Bytes per cluster: 512
  Sectors per cluster: 8
  Filename length: 255
S:\ (Local - NTFS) BACK2 Total: 62,239,724KB, Free: 2,567,704KB
  Serial Number: 983F - 5BFB
  Bytes per cluster: 512
```

```

Sectors per cluster: 8
Filename length: 255
Z:\ (Local - NTFS) testfiles Total: 2,345,488KB, Free: 896,996KB
Serial Number: B0C5 - 33C8
Bytes per cluster: 512
Sectors per cluster: 8
Filename length: 255

```

#### Memory Report

Handles: 2,289

Threads: 116

Processes: 19

#### Physical Memory (K)

Total: 3,865,000

Available: 635,944

File Cache: 12,496

#### Kernel Memory (K)

Total: 14,332

Paged: 8,944

Nonpaged: 5,388

#### Commit Charge (K)

Total: 3,086,236

Limit: 3,987,108

Peak: 3,098,900

#### Pagefile Space (K)

Total: 273,408

Total in use: 8,800

Peak: 8,820

```

C:\pagefile.sys
Total: 273,408
Total in use: 8,800
Peak: 8,820

```

#### Services Report

##### Alerter

Stopped (Manual)

```

C:\WINNT\System32\services.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Shared Process
Service Dependencies:
    LanmanWorkstation

```

##### Computer Browser

Stopped (Manual)

```

C:\WINNT\System32\services.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Shared Process
Service Dependencies:
    LanmanWorkstation
    LanmanServer
    LmHosts

```

```

ClipBook Server
C:\WINNT\System32\clipsrv.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Own Process
Service Dependencies:
    NetDDE

```

Stopped (Manual)

```

PCI Hot Plug Service
C:\WINNT\System32\cpqphps.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Own Process
DHCP Client (TDI)
C:\WINNT\System32\services.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Shared Process
Service Dependencies:
    Tcpip
    Afd
    NetBT

```

Stopped (Disabled)

```

EventLog (Event log)
C:\WINNT\System32\services.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Shared Process
Server

```

Running (Automatic)

```

C:\WINNT\System32\services.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Shared Process
Group Dependencies:
    TDI

```

Running (Automatic)

```

Workstation (NetworkProvider)
C:\WINNT\System32\services.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Shared Process
Group Dependencies:
    TDI
License Logging Service

```

Running (Automatic)

```

C:\WINNT\System32\llssrv.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Own Process
TCP/IP NetBIOS Helper

```

Stopped (Manual)

```

C:\WINNT\System32\services.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Shared Process
Group Dependencies:
    NetworkProvider
Messenger

```

Stopped (Manual)

```

C:\WINNT\System32\services.exe
Service Account Name: LocalSystem
Error Severity: Normal
Service Flags: Shared Process
Service Dependencies:
    LanmanWorkstation

```

NetBios				
MSDTC (MS Transactions)	Stopped	(Manual)		
C:\WINNT\System32\msdtc.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
Service Dependencies:				
RPCSS				
NTLMSSP				
MSSQLServer	Stopped	(Manual)		
C:\MSSQL7\binn\sqlservr.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
Network DDE (NetDDEGroup)	Stopped	(Manual)		
C:\WINNT\system32\netdde.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Shared Process				
Service Dependencies:				
NetDDEDSDM				
Network DDE DSDM	Stopped	(Manual)		
C:\WINNT\system32\netdde.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Shared Process				
Net Logon (RemoteValidation)	Stopped	(Manual)		
C:\WINNT\System32\lsass.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Shared Process				
Service Dependencies:				
LanmanWorkstation				
LmHosts				
NT LM Security Support Provider	Running	(Manual)		
C:\WINNT\System32\SERVICES.EXE				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Shared Process				
Plug and Play (PlugPlay)	Running	(Automatic)		
C:\WINNT\system32\services.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Shared Process				
Protected Storage	Running	(Automatic)		
C:\WINNT\System32\pstores.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process, Interactive				
Service Dependencies:				
RpcSs				
Directory Replicator	Stopped	(Manual)		
C:\WINNT\System32\lmrepl.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
Service Dependencies:				
LanmanWorkstation				
LanmanServer				
Remote Procedure Call (RPC) Locator				Stopped (Manual)
C:\WINNT\System32\LOCATOR.EXE				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
Service Dependencies:				
LanmanWorkstation				
Rdr				
Remote Procedure Call (RPC) Service			Running (Automatic)	
C:\WINNT\system32\RpcSs.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
Schedule			Stopped (Manual)	
C:\WINNT\System32\AtSvc.Exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
SNMP			Stopped (Disabled)	
C:\WINNT\System32\snmp.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
Service Dependencies:				
Tcpip				
EventLog				
SNMP Trap Service			Stopped (Disabled)	
C:\WINNT\System32\snmptrap.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
Service Dependencies:				
Tcpip				
EventLog				
Spooler (SpoolerGroup)			Stopped (Manual)	
C:\WINNT\system32\spoolss.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process, Interactive				
SQLServerAgent			Stopped (Manual)	
C:\MSSQL7\binn\sqlagent.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
Service Dependencies:				
MSSQLServer				
Telephony Service			Stopped (Manual)	
C:\WINNT\system32\tapisrv.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				
UPS			Stopped (Manual)	
C:\WINNT\System32\ups.exe				
Service Account Name: LocalSystem				
Error Severity: Normal				
Service Flags: Own Process				

Drivers Report			
Abiosdsk (Primary disk)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
AFD Networking Support Environment (TDI)	Running	(Automatic)	
C:\WINNT\System32\drivers\afd.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Aha154x (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Aha174x (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
aic78xx (SCSI miniport)	Stopped	(Boot)	
C:\WINNT\System32\DRIVERS\aic78xx.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Always (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
amioNt (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
amsint (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Arrow (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
atapi (SCSI miniport)	Stopped	(Boot)	
C:\WINNT\System32\DRIVERS\atapi.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Atdisk (Primary disk)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
ati (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Beep (Base)	Running	(System)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
BusLogic (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Busmouse (Pointer Port)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Cdaudio (Filter)	Stopped	(System)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Cdfs (File system)	Running	(Disabled)	
Error Severity: Normal			
Service Flags: File System Driver, Shared Process			
Group Dependencies:			
SCSI CDROM Class			
Cdrom (SCSI CDROM Class)	Running	(System)	

Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Group Dependencies:			
SCSI miniport			
Changer (Filter)	Stopped	(System)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
cirrus (Video)	Running	(System)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Cpqarray (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
cpqfw2e (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
dac960nt (SCSI miniport)	Running	(Boot)	
C:\WINNT\System32\drivers\dac960nt.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
dce376nt (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Dellldsa (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Dell_DGX (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Disk (SCSI Class)	Running	(Boot)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Group Dependencies:			
SCSI miniport			
Diskperf (Filter)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
DptScsi (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
dtc329x (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Intel(R) PRO NDIS Driver (NDIS)	Running	(Automatic)	
C:\WINNT\System32\drivers\E100BNT.SYS			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
em (Base)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
et4000 (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Fastfat (Boot file system)	Running	(Disabled)	
Error Severity: Normal			
Service Flags: File System Driver, Shared Process			
Fd16_700 (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			

Fd7000ex (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Fd8xx (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
flashpnt (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Floppy (Primary disk)	Running	(System)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Ftdisk (Filter)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
PCI Hot Plug Driver	Stopped	(Disabled)	
System32\DRIVERS\hotplug.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
i8042 Keyboard and PS/2 Mouse Port Driver (Keyboard Port)	Running	(System)	
System32\DRIVERS\i8042prt.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Import (Pointer Port)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Jazzg300 (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Jazzg364 (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Jzvxl484 (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Keyboard Class Driver (Keyboard Class)	Running	(System)	
System32\DRIVERS\kbdclass.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
KSecDD (Base)	Running	(System)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
macdisk (Filter)	Running	(Boot)	
C:\WINNT\System32\drivers\macdisk.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
megaraid (SCSI Miniport)	Stopped	(Boot)	
C:\WINNT\System32\drivers\megaraid.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
mga (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
mga_mil (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
mitsumi (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
			Service Flags: Kernel Driver, Shared Process
			mkecr5xx (SCSI miniport)
			Stopped
			(Disabled)
			Error Severity: Normal
			Service Flags: Kernel Driver, Shared Process
			Modem (Extended base)
			Stopped
			(Manual)
			Error Severity: Ignore
			Service Flags: Kernel Driver, Shared Process
			Mouse Class Driver (Pointer Class)
			Running
			(System)
			System32\DRIVERS\mouclass.sys
			Error Severity: Normal
			Service Flags: Kernel Driver, Shared Process
			mraid (Primary disk)
			Stopped
			(Boot)
			Error Severity: Ignore
			Service Flags: Kernel Driver, Shared Process
			mraid35x (Primary disk)
			Stopped
			(Disabled)
			Error Severity: Ignore
			Service Flags: Kernel Driver, Shared Process
			Msfs (File system)
			Running
			(System)
			Error Severity: Normal
			Service Flags: File System Driver, Shared Process
			Mup (Network)
			Running
			(Manual)
			C:\WINNT\System32\drivers\mup.sys
			Error Severity: Normal
			Service Flags: File System Driver, Shared Process
			NetBEUI Protocol (PNP_TDI)
			Running
			(Automatic)
			C:\WINNT\System32\drivers\nbf.sys
			Error Severity: Normal
			Service Flags: Kernel Driver, Shared Process
			Ncr53c9x (SCSI miniport)
			Stopped
			(Disabled)
			Error Severity: Normal
			Service Flags: Kernel Driver, Shared Process
			ncr77c22 (Video)
			Stopped
			(Disabled)
			Error Severity: Ignore
			Service Flags: Kernel Driver, Shared Process
			Ncrc700 (SCSI miniport)
			Stopped
			(Disabled)
			Error Severity: Normal
			Service Flags: Kernel Driver, Shared Process
			Ncrc710 (SCSI miniport)
			Stopped
			(Disabled)
			Error Severity: Normal
			Service Flags: Kernel Driver, Shared Process
			Microsoft NDIS System Driver (NDIS)
			Running
			(System)
			Error Severity: Normal
			Service Flags: Kernel Driver, Shared Process
			NetBIOS Interface (NetBIOSGroup)
			Stopped
			(Manual)
			C:\WINNT\System32\drivers\netbios.sys
			Error Severity: Normal
			Service Flags: File System Driver, Shared Process
			Group Dependencies:
			TDI
			WINS Client(TCP/IP) (PNP_TDI)
			Running
			(Automatic)
			C:\WINNT\System32\drivers\netbt.sys
			Error Severity: Normal
			Service Flags: Kernel Driver, Shared Process
			Service Dependencies:
			Tcpip
			NetDetect
			Stopped
			(Manual)
			C:\WINNT\system32\drivers\netdetect.sys
			Error Severity: Normal
			Service Flags: Kernel Driver, Shared Process

Npfs (File system)	Running	(System)	Scsiprnt (Extended base)	Stopped	(Automatic)																																																						
Error Severity: Normal			Error Severity: Ignore																																																								
Service Flags: File System Driver, Shared Process			Service Flags: Kernel Driver, Shared Process																																																								
Ntfs (File system)	Running	(Disabled)	Group Dependencies:																																																								
Error Severity: Normal			SCSI miniport																																																								
Service Flags: File System Driver, Shared Process																																																											
Null (Base)	Running	(System)	Scsiscan (SCSI Class)	Running	(System)																																																						
Error Severity: Normal			Error Severity: Ignore																																																								
Service Flags: Kernel Driver, Shared Process			Service Flags: Kernel Driver, Shared Process																																																								
Oliscsi (SCSI miniport)	Stopped	(Disabled)	Group Dependencies:																																																								
Error Severity: Normal			SCSI miniport																																																								
Service Flags: Kernel Driver, Shared Process																																																											
Parallel (Extended base)	Running	(Automatic)	Serial (Extended base)	Running	(Automatic)																																																						
Error Severity: Ignore			Error Severity: Ignore																																																								
Service Flags: Kernel Driver, Shared Process			Service Flags: Kernel Driver, Shared Process																																																								
Service Dependencies:			Sermouse (Pointer Port)	Stopped	(Disabled)																																																						
Parport			Error Severity: Ignore																																																								
Group Dependencies:			Service Flags: Kernel Driver, Shared Process																																																								
Parallel arbitrator																																																											
Parport (Parallel arbitrator)	Running	(Automatic)	Sfloppy (Primary disk)	Stopped	(System)																																																						
Error Severity: Ignore			Error Severity: Ignore																																																								
Service Flags: Kernel Driver, Shared Process			Service Flags: Kernel Driver, Shared Process																																																								
ParVdm (Extended base)	Running	(Automatic)	Group Dependencies:																																																								
Error Severity: Ignore			SCSI miniport																																																								
Service Flags: Kernel Driver, Shared Process																																																											
Service Dependencies:			Simbad (Filter)	Stopped	(Disabled)																																																						
Parport			Error Severity: Normal																																																								
Group Dependencies:			Service Flags: Kernel Driver, Shared Process																																																								
Parallel arbitrator			slcd32 (SCSI miniport)	Stopped	(Disabled)																																																						
PCIDump (PCI Configuration)	Stopped	(System)	Error Severity: Normal																																																								
Error Severity: Ignore			Service Flags: Kernel Driver, Shared Process																																																								
Service Flags: Kernel Driver, Shared Process			sparrow (SCSI miniport)	Stopped	(Disabled)																																																						
Pcmcia (System Bus Extender)	Stopped	(Disabled)	Error Severity: Normal																																																								
Error Severity: Normal			Service Flags: Kernel Driver, Shared Process																																																								
Service Flags: Kernel Driver, Shared Process			Spock (SCSI miniport)	Stopped	(Disabled)																																																						
PnP ISA Enabler Driver (Base)	Stopped	(System)	Error Severity: Normal																																																								
Error Severity: Ignore			Service Flags: Kernel Driver, Shared Process																																																								
Service Flags: Kernel Driver, Shared Process			Srv (Network)	Running	(Manual)																																																						
PortFltr (port)	Stopped	(Manual)	C:\WINNT\System32\drivers\srv.sys																																																								
Error Severity: Normal			Error Severity: Normal																																																								
Service Flags: Kernel Driver, Shared Process			Service Flags: File System Driver, Shared Process																																																								
Group Dependencies:			symc810 (SCSI miniport)	Stopped	(Disabled)																																																						
SCSI miniport			Error Severity: Normal																																																								
psidisp (Video)	Stopped	(Disabled)	Service Flags: Kernel Driver, Shared Process																																																								
Error Severity: Ignore			symc8XX (SCSI Miniport)	Running	(Boot)																																																						
Service Flags: Kernel Driver, Shared Process			C:\WINNT\System32\drivers\Symc8XX.sys																																																								
Q110wnt (SCSI miniport)	Stopped	(Disabled)	Error Severity: Normal			Error Severity: Normal			Service Flags: Kernel Driver, Shared Process			Service Flags: Kernel Driver, Shared Process			qv (Video)	Stopped	(Disabled)	Error Severity: Ignore			sym_hi (SCSI Miniport)	Running	(Boot)	Service Flags: Kernel Driver, Shared Process			C:\WINNT\System32\drivers\Sym_hi.sys			Rdr (Network)	Running	(Manual)	Error Severity: Normal			Error Severity: Normal			Service Flags: File System Driver, Shared Process			Service Flags: Kernel Driver, Shared Process			s3 (Video)	Stopped	(Disabled)	Error Severity: Ignore			sysdrv (Extended Base)	Running	(Automatic)	Service Flags: Kernel Driver, Shared Process			Error Severity: Normal		
Error Severity: Normal			Error Severity: Normal																																																								
Service Flags: Kernel Driver, Shared Process			Service Flags: Kernel Driver, Shared Process																																																								
qv (Video)	Stopped	(Disabled)	Error Severity: Ignore			sym_hi (SCSI Miniport)	Running	(Boot)	Service Flags: Kernel Driver, Shared Process			C:\WINNT\System32\drivers\Sym_hi.sys			Rdr (Network)	Running	(Manual)	Error Severity: Normal			Error Severity: Normal			Service Flags: File System Driver, Shared Process			Service Flags: Kernel Driver, Shared Process			s3 (Video)	Stopped	(Disabled)	Error Severity: Ignore			sysdrv (Extended Base)	Running	(Automatic)	Service Flags: Kernel Driver, Shared Process			Error Severity: Normal																	
Error Severity: Ignore			sym_hi (SCSI Miniport)	Running	(Boot)																																																						
Service Flags: Kernel Driver, Shared Process			C:\WINNT\System32\drivers\Sym_hi.sys																																																								
Rdr (Network)	Running	(Manual)	Error Severity: Normal			Error Severity: Normal			Service Flags: File System Driver, Shared Process			Service Flags: Kernel Driver, Shared Process			s3 (Video)	Stopped	(Disabled)	Error Severity: Ignore			sysdrv (Extended Base)	Running	(Automatic)	Service Flags: Kernel Driver, Shared Process			Error Severity: Normal																																
Error Severity: Normal			Error Severity: Normal																																																								
Service Flags: File System Driver, Shared Process			Service Flags: Kernel Driver, Shared Process																																																								
s3 (Video)	Stopped	(Disabled)	Error Severity: Ignore			sysdrv (Extended Base)	Running	(Automatic)	Service Flags: Kernel Driver, Shared Process			Error Severity: Normal																																															
Error Severity: Ignore			sysdrv (Extended Base)	Running	(Automatic)																																																						
Service Flags: Kernel Driver, Shared Process			Error Severity: Normal																																																								

Error Severity: Normal							
Service Flags: Kernel Driver, Shared Process							
tga (Video)	Stopped	(Disabled)					
Error Severity: Ignore							
Service Flags: Kernel Driver, Shared Process							
tmv1 (SCSI miniport)	Stopped	(Disabled)					
Error Severity: Normal							
Service Flags: Kernel Driver, Shared Process							
Ultra124 (SCSI miniport)	Stopped	(Disabled)					
Error Severity: Normal							
Service Flags: Kernel Driver, Shared Process							
Ultra14f (SCSI miniport)	Stopped	(Disabled)					
Error Severity: Normal							
Service Flags: Kernel Driver, Shared Process							
Ultra24f (SCSI miniport)	Stopped	(Disabled)					
Error Severity: Normal							
Service Flags: Kernel Driver, Shared Process							
update (Base)	Stopped	(System)					
Error Severity: Ignore							
Service Flags: Kernel Driver, Shared Process							
v7vram (Video)	Stopped	(Disabled)					
Error Severity: Ignore							
Service Flags: Kernel Driver, Shared Process							
vgaSave (Video Save)	Stopped	(System)					
C:\WINNT\System32\drivers\vga.sys							
Error Severity: Ignore							
Service Flags: Kernel Driver, Shared Process							
vgaStart (Video Init)	Stopped	(System)					
C:\WINNT\System32\drivers\vga.sys							
Error Severity: Ignore							
Service Flags: Kernel Driver, Shared Process							
Wd33c93 (SCSI miniport)	Stopped	(Disabled)					
Error Severity: Normal							
Service Flags: Kernel Driver, Shared Process							
wd90c24a (Video)	Stopped	(Disabled)					
Error Severity: Ignore							
Service Flags: Kernel Driver, Shared Process							
wdvga (Video)	Stopped	(Disabled)					
Error Severity: Ignore							
Service Flags: Kernel Driver, Shared Process							
weitekp9 (Video)	Stopped	(Disabled)					
Error Severity: Ignore							
Service Flags: Kernel Driver, Shared Process							
xga (Video)	Stopped	(Disabled)					
Error Severity: Ignore							
Service Flags: Kernel Driver, Shared Process							
 IRQ and Port Report							
-----							
Devices	Vector	Level	Affinity				
-----							
MPS 1.4 - APIC platform	8	8	0x0000000f				
MPS 1.4 - APIC platform	0	0	0x0000000f				
MPS 1.4 - APIC platform	1	1	0x0000000f				
MPS 1.4 - APIC platform	2	2	0x0000000f				
MPS 1.4 - APIC platform	3	3	0x0000000f				
MPS 1.4 - APIC platform	4	4	0x0000000f				
MPS 1.4 - APIC platform	5	5	0x0000000f				
MPS 1.4 - APIC platform	6	6	0x0000000f				
MPS 1.4 - APIC platform	7	7	0x0000000f				
MPS 1.4 - APIC platform	8	8	0x0000000f				
MPS 1.4 - APIC platform	9	9	0x0000000f				
MPS 1.4 - APIC platform	10	10	0x0000000f				
MPS 1.4 - APIC platform	11	11	0x0000000f				
MPS 1.4 - APIC platform	12	12	0x0000000f				
MPS 1.4 - APIC platform	13	13	0x0000000f				
MPS 1.4 - APIC platform	14	14	0x0000000f				
MPS 1.4 - APIC platform	15	15	0x0000000f				
MPS 1.4 - APIC platform	16	16	0x0000000f				
MPS 1.4 - APIC platform	17	17	0x0000000f				
MPS 1.4 - APIC platform	18	18	0x0000000f				
MPS 1.4 - APIC platform	19	19	0x0000000f				
MPS 1.4 - APIC platform	20	20	0x0000000f				
MPS 1.4 - APIC platform	21	21	0x0000000f				
MPS 1.4 - APIC platform	22	22	0x0000000f				
MPS 1.4 - APIC platform	23	23	0x0000000f				
MPS 1.4 - APIC platform	24	24	0x0000000f				
MPS 1.4 - APIC platform	25	25	0x0000000f				
MPS 1.4 - APIC platform	26	26	0x0000000f				
MPS 1.4 - APIC platform	27	27	0x0000000f				
MPS 1.4 - APIC platform	28	28	0x0000000f				
MPS 1.4 - APIC platform	29	29	0x0000000f				
MPS 1.4 - APIC platform	30	30	0x0000000f				
MPS 1.4 - APIC platform	31	31	0x0000000f				
MPS 1.4 - APIC platform	32	32	0x0000000f				
MPS 1.4 - APIC platform	33	33	0x0000000f				
MPS 1.4 - APIC platform	34	34	0x0000000f				
MPS 1.4 - APIC platform	35	35	0x0000000f				
MPS 1.4 - APIC platform	36	36	0x0000000f				
MPS 1.4 - APIC platform	37	37	0x0000000f				
MPS 1.4 - APIC platform	38	38	0x0000000f				
MPS 1.4 - APIC platform	39	39	0x0000000f				
MPS 1.4 - APIC platform	40	40	0x0000000f				
MPS 1.4 - APIC platform	41	41	0x0000000f				
MPS 1.4 - APIC platform	42	42	0x0000000f				
MPS 1.4 - APIC platform	43	43	0x0000000f				
MPS 1.4 - APIC platform	44	44	0x0000000f				
MPS 1.4 - APIC platform	45	45	0x0000000f				
MPS 1.4 - APIC platform	46	46	0x0000000f				
MPS 1.4 - APIC platform	47	47	0x0000000f				
MPS 1.4 - APIC platform	61	61	0x0000000f				
MPS 1.4 - APIC platform	65	65	0x0000000f				
MPS 1.4 - APIC platform	80	80	0x0000000f				
MPS 1.4 - APIC platform	193	193	0x0000000f				
MPS 1.4 - APIC platform	225	225	0x0000000f				
MPS 1.4 - APIC platform	253	253	0x0000000f				
MPS 1.4 - APIC platform	254	254	0x0000000f				
MPS 1.4 - APIC platform	255	255	0x0000000f				
i8042prt	1	1	0xffffffff				
i8042prt	12	12	0xffffffff				
Serial	4	4	0x00000000				
Serial	3	3	0x00000000				
E100B	24	24	0x6db6db6d				
Floppy	6	6	0x00000000				
dac960nt	32	32	0x00000000				
dac960nt	32	32	0x00000000				

dac960nt	32	32	0x00000000
dac960nt	32	32	0x00000000
dac960nt	32	32	0x00000000
dac960nt	32	32	0x00000000
Symc8XX	32	32	0x00000000
Sym_hi	12	12	0x00000000
Sym_hi	13	13	0x00000000
-----			
Devices		Physical Address	Length
MPS 1.4 - APIC platform	0x00000000	0x0000000010	
MPS 1.4 - APIC platform	0x00000020	0x0000000002	
MPS 1.4 - APIC platform	0x00000040	0x0000000004	
MPS 1.4 - APIC platform	0x00000048	0x0000000004	
MPS 1.4 - APIC platform	0x00000061	0x0000000001	
MPS 1.4 - APIC platform	0x00000070	0x0000000002	
MPS 1.4 - APIC platform	0x00000080	0x0000000010	
MPS 1.4 - APIC platform	0x00000092	0x0000000001	
MPS 1.4 - APIC platform	0x000000a0	0x0000000002	
MPS 1.4 - APIC platform	0x000000c0	0x0000000010	
MPS 1.4 - APIC platform	0x000000f0	0x0000000010	
i8042prt	0x00000060	0x0000000001	
i8042prt	0x00000064	0x0000000001	
Parport	0x00000378	0x0000000003	
Serial	0x000003f8	0x0000000007	
Serial	0x000002f8	0x0000000007	
Floppy	0x000003f0	0x0000000006	
Floppy	0x000003f7	0x0000000001	
dac960nt	0x00003000	0x0000000080	
dac960nt	0x00004000	0x0000000080	
dac960nt	0x00006000	0x0000000080	
dac960nt	0x00007000	0x0000000080	
dac960nt	0x00008000	0x0000000080	
dac960nt	0x00009000	0x0000000080	
Symc8XX	0x00002000	0x0000000100	
Sym_hi	0x00005000	0x0000000100	
Sym_hi	0x00005400	0x0000000100	
cirrus	0x000003b0	0x000000000c	
cirrus	0x000003c0	0x0000000020	

dac960nt	0xf4210000	0x00000080
dac960nt	0xf8000000	0x02000000
dac960nt	0xf4310000	0x00000080
dac960nt	0xfa000000	0x02000000
dac960nt	0xf4410000	0x00000080
dac960nt	0xfc000000	0x02000000
Symc8XX	0xec101000	0x00000100
Sym_hi	0xf4004000	0x00000400
Sym_hi	0xf4000000	0x00002000
Sym_hi	0xf4004400	0x00000400
Sym_hi	0xf4002000	0x00002000
cirrus	0x000a0000	0x00020000
-----		
Environment Report		
-----		
System Environment Variables		
ComSpec=C:\WINNT\system32\cmd.exe		
HOME=C:/		
NTRESKIT=Z:\NTRESKIT		
NUMBER_OF_PROCESSORS=4		
OS=Windows_NT		
Os2LibPath=C:\WINNT\system32\os2\dll;		
Path=C:\MKS\mksnt;C:\WINNT\system32;C:\WINNT;Z:\NTRESKIT;Z:\NTRESKIT\Perl;		
z:\emon\bin;C:\MSSQL7\BINN		
PROCESSOR_ARCHITECTURE=x86		
PROCESSOR_IDENTIFIER=x86 Family 6 Model 5 Stepping 2, GenuineIntel		
PROCESSOR_LEVEL=6		
PROCESSOR_REVISION=0502		
ROOTDIR=C:/MKS		
SHELL=C:/MKS/mksnt/sh.exe		
TMPDIR=C:/TEMP		
windir=C:\WINNT		
-----		
Environment Variables for Current User		
TEMP=C:\TEMP		
TMP=C:\TEMP		
-----		
Network Report		
-----		
Your Access Level: Admin & Local		
Workgroup or Domain: WORKGROUP		
Network Version: 4.0		
LanRoot: WORKGROUP		
Logged On Users: 1		
Current User (1): Administrator		
Logon Domain: AVALON4		
Logon Server: AVALON4		
Transport: NetBT_E100B2, 00-A0-C9-C5-45-C4, VC's: 0, Wan: Wan		

DMA and Memory Report			
-----			
Devices	Channel	Port	
-----			
Floppy	2	0	
-----			
Devices		Physical Address	Length
-----			
MPS 1.4 - APIC platform	0xfec00000	0x00000400	
MPS 1.4 - APIC platform	0xfe000000	0x00000400	
E100B	0xed200000	0x0000001e	
dac960nt	0xec210000	0x00000080	
dac960nt	0xf0000000	0x02000000	
dac960nt	0xec310000	0x00000080	
dac960nt	0xf2000000	0x02000000	
dac960nt	0xf4110000	0x00000080	
dac960nt	0xf6000000	0x02000000	

Transport: Nbf\_E100B2, 00-A0-C9-C5-45-C4, VC's: 0, Wan: Wan  
 Character Wait: 3,600  
 Collection Time: 250  
 Maximum Collection Count: 16  
 Keep Connection: 600  
 Maximum Commands: 5  
 Session Time Out: 45  
 Character Buffer Size: 512  
 Maximum Threads: 17  
 Lock Quota: 6,144  
 Lock Increment: 10  
 Maximum Locks: 500  
 Pipe Increment: 10  
 Maximum Pipes: 500  
 Cache Time Out: 40  
 Dormant File Limit: 45  
 Read Ahead Throughput: 4,294,967,295  
 Mailslot Buffers: 3  
 Server Announce Buffers: 20  
 Illegal Datagrams: 5  
 Datagram Reset Frequency: 60  
 Log Election Packets: False  
 Use Opportunistic Locking: True  
 Use Unlock Behind: True  
 Use Close Behind: True  
 Buffer Pipes: True  
 Use Lock, Read, Unlock: True  
 Use NT Caching: True  
 Use Raw Read: True  
 Use Raw Write: True  
 Use Write Raw Data: True  
 Use Encryption: True  
 Buffer Deny Write Files: True  
 Buffer Read Only Files: True  
 Force Core Creation: True  
 512 Byte Max Transfer: False  
 Bytes Received: 1,106  
 SMB's Received: 11  
 Paged Read Bytes Requested: 0  
 Non Paged Read Bytes Requested: 0  
 Cache Read Bytes Requested: 0  
 Network Read Bytes Requested: 0  
 Bytes Transmitted: 1,184  
 SMB's Transmitted: 11  
 Paged Read Bytes Requested: 0  
 Non Paged Read Bytes Requested: 0  
 Cache Read Bytes Requested: 0  
 Network Read Bytes Requested: 0  
 Initially Failed Operations: 0  
 Failed Completion Operations: 0  
 Read Operations: 0  
 Random Read Operations: 0  
 Read SMB's: 0  
 Large Read SMB's: 0  
 Small Read SMB's: 0  
 Write Operations: 0  
 Random Write Operations: 0  
 Write SMB's: 0

Large Write SMB's: 0  
 Small Write SMB's: 0  
 Raw Reads Denied: 0  
 Raw Writes Denied: 0  
 Network Errors: 0  
 Sessions: 2  
 Failed Sessions: 0  
 Reconnects: 0  
 Core Connects: 0  
 LM 2.0 Connects: 0  
 LM 2.x Connects: 0  
 Windows NT Connects: 1  
 Server Disconnects: 1  
 Hung Sessions: 0  
 Use Count: 3  
 Failed Use Count: 0  
 Current Commands: 0  
 Server File Opens: 6  
 Server Device Opens: 0  
 Server Jobs Queued: 0  
 Server Session Opens: 0  
 Server Sessions Timed Out: 0  
 Server Sessions Errorred Out: 0  
 Server Password Errors: 0  
 Server Permission Errors: 0  
 Server System Errors: 0  
 Server Bytes Sent: 3,339  
 Server Bytes Received: 3,918  
 Server Average Response Time: 0  
 Server Request Buffers Needed: 0  
 Server Big Buffers Needed: 0

## NT Server Registry Information

### Software\Microsoft

Key Name:	SOFTWARE\Microsoft\MMC
Class Name:	<NO CLASS>
Last Write Time:	6/10/98 - 11:42 AM
Key Name:	SOFTWARE\Microsoft\MMC\NodeTypes
Class Name:	<NO CLASS>
Last Write Time:	6/10/98 - 11:42 AM
Key Name:	SOFTWARE\Microsoft\MMC\Settings
Class Name:	<NO CLASS>
Last Write Time:	9/4/98 - 8:39 AM
Value 0	
Name:	Help File Index
Type:	REG_DWORD
Data:	0x2
Key Name:	SOFTWARE\Microsoft\MMC\SnapIns

	<p>Class Name: &lt;NO CLASS&gt;          Last Write Time: 6/10/98 - 11:42 AM</p> <p>Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}</p> <p>Class Name: &lt;NO CLASS&gt;          Last Write Time: 9/2/98 - 3:13 PM          Value 0          Name: About          Type: REG_SZ          Data: {00100101-1816-11d0-8EF5-00AA0062C58F}</p> <p>Value 1          Name: NameString          Type: REG_SZ          Data: Microsoft SQL Enterprise Manager</p>	<p>Last Write Time: 9/2/98 - 3:13 PM</p> <p>Key Name: SOFTWARE\Microsoft\MSDTC</p> <p>Class Name: &lt;NO CLASS&gt;          Last Write Time: 9/2/98 - 3:13 PM          Value 0          Name: MaxLogSize          Type: REG_DWORD          Data: 0x200</p> <p>Key Name: SOFTWARE\Microsoft\MSDTC\Setup</p> <p>Class Name: &lt;NO CLASS&gt;          Last Write Time: 9/2/98 - 3:13 PM          Value 0          Name: InstallCode          Type: REG_DWORD          Data: 0</p> <p>Value 1          Name: InstallState          Type: REG_DWORD          Data: 0x1</p> <p>Value 2          Name: MajorVersion          Type: REG_DWORD          Data: 0x20000</p> <p>Value 3          Name: MinorVersion          Type: REG_DWORD          Data: 0x2f8</p> <p>Key Name: SOFTWARE\Microsoft\MSDTC\Setup\ExitStatus</p> <p>Class Name: &lt;NO CLASS&gt;          Last Write Time: 9/2/98 - 3:13 PM          Value 0          Name: CompletionComment          Type: REG_SZ          Data: Source = DtcComplete, ExitType = Success,          Successfu l Install</p>
11d0-	<p>Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\About</p> <p>Class Name: &lt;NO CLASS&gt;          Last Write Time: 9/2/98 - 3:13 PM          Value 0          Name: &lt;NO NAME&gt;          Type: REG_SZ          Data: {00100101-1816-11d0-8EF5-00AA0062C58F}</p>	
11d0-	<p>Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\NameString</p> <p>Class Name: &lt;NO CLASS&gt;          Last Write Time: 9/2/98 - 3:13 PM          Value 0          Name: &lt;NO NAME&gt;          Type: REG_SZ          Data: Microsoft SQL Enterprise Manager</p>	
11d0-	<p>Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\NodeTypes</p> <p>Class Name: &lt;NO CLASS&gt;          Last Write Time: 9/2/98 - 3:13 PM</p>	
11d0-8E	<p>Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\NodeTypes\{00100200-1816-F5-00AA0062C58F}</p> <p>Class Name: &lt;NO CLASS&gt;          Last Write Time: 9/2/98 - 3:13 PM</p>	
11d0-	<p>Key Name: SOFTWARE\Microsoft\MMC\SnapIns\{00100100-1816-8EF5-00AA0062C58F}\Standalone</p> <p>Class Name: &lt;NO CLASS&gt;</p>	<p>Value 1          Name: ErrorCode          Type: REG_DWORD          Data: 0</p> <p>Value 2          Name: ExitCode          Type: REG_DWORD          Data: 0</p> <p>Value 3          Name: Source</p>

Type:	REG_DWORD	Key Name:	SOFTWARE\Microsoft\MSSQLServer\MSSQLServer
Data:	0x1	Class Name:	<NO CLASS>
Key Name:	SOFTWARE\Microsoft\MSSQLServer	Last Write Time:	9/2/98 - 3:16 PM
Class Name:	<NO CLASS>	Value 0	
Last Write Time:	6/10/98 - 1:00 PM	Name:	AuditLevel
Key Name:	SOFTWARE\Microsoft\MSSQLServer\Client	Type:	REG_DWORD
Class Name:	<NO CLASS>	Data:	0
Last Write Time:	9/2/98 - 3:13 PM	Value 1	
Key Name:	SOFTWARE\Microsoft\MSSQLServer\Client\ConnectTo	Name:	BackupDirectory
Class Name:	<NO CLASS>	Type:	REG_SZ
Last Write Time:	9/2/98 - 3:57 PM	Data:	C:\MSSQL7\BACKUP
Value 0		Value 2	
Name:	DSQUERY	Name:	DefaultCompStyle
Type:	REG_SZ	Type:	REG_SZ
Data:	DBMSSOCN	Data:	0
Key Name:	SOFTWARE\Microsoft\MSSQLServer\Client\DB-Lib	Value 3	
Class Name:	<NO CLASS>	Name:	DefaultDomain
Last Write Time:	9/21/98 - 3:37 PM	Type:	REG_SZ
Value 0		Data:	AVALON4
Name:	AutoAnsiToOem	Value 4	
Type:	REG_SZ	Name:	DefaultLocaleID
Data:	on	Type:	REG_SZ
Key Name:	SOFTWARE\Microsoft\MSSQLServer\Client\TDS	Data:	8200
Class Name:	<NO CLASS>	Value 5	
Last Write Time:	9/4/98 - 4:50 PM	Name:	DefaultLogin
Value 0		Type:	REG_SZ
Name:	<NO NAME>	Data:	guest
Type:	REG_SZ	Value 6	
Data:	7.0	Name:	DefaultSortID
Value 1		Type:	REG_SZ
Name:	.	Data:	50
Type:	REG_SZ	Value 7	
Data:	7.0	Name:	ListenOn
Value 2		Type:	REG_MULTI_SZ
Name:	Avalon4	Data:	SSNMPN70,\.\pipe\sql\query
Type:	REG_SZ		SSMSSO70,1433
Data:	7.0	Value 8	
Key Name:	SOFTWARE\Microsoft\MSSQLServer\ClientSetup	Name:	LoginMode
Class Name:	<NO CLASS>	Type:	REG_DWORD
Last Write Time:	9/2/98 - 3:16 PM	Data:	0
Value 0		Value 9	
Name:	SQLPath	Name:	Map#
Type:	REG_SZ	Type:	REG_SZ
Data:	C:\MSSQL7	Data:	-
Value 10		Value 10	
Name:		Name:	Map\$
Type:		Type:	REG_SZ
Data:		Data:	

Value 11	Name: Map_	Type: REG_SZ	Data: \
Value 12	Name: ResourceMgrID	Type: REG_SZ	Data: {4002167A-42B2-11D2-B9ED-00A0C9C545C4}
Value 13	Name: RWSListenAddress	Type: REG_SZ	Data:
Value 14	Name: SetHostName	Type: REG_DWORD	Data: 0
Value 15	Name: TapeLoadWaitTime	Type: REG_DWORD	Data: 0xffffffff
Key Name: SOFTWARE\Microsoft\MSSQLServer\MSSQLServer\CurrentVersion			
	Class Name: <NO CLASS>	Last Write Time: 9/2/98 - 3:13 PM	
Value 0	Name: checksum	Type: REG_BINARY	Data:
6522c15c	00000000	36 35 32 32 63 31 35 63 - 32 37 64 65 64 62 32 38	
27dedb28	00000010	61 61 30 33 34 34 64 64 - 31 31 36 38 65 32 66 38	
aa0344dd	1168e2f8	35 31 39 35 62 34 30 62 - 65 39 34 31 62 31 32 35	
5195b40b	00000020	62 37 66 32 64 36 39 36 - 36 36 34 62 64 63 63 32	
b7f2d696	e941b125	664bdcc2	
	00000030	31 31 30 62 36 36 65 30 - 34 31 38 61 31 63 33 39	
110b66e0	418a1c39	00000040	
	00000050	38 30 65 33 61 34 66 63 - 63 36 65 34 38 64 38 38	
80e3a4fc	c6e48d88	00000060	
	72522f18	cc14458a	
	00000070	62 31 65 34 37 36 39 63 - 36 66 33 32 66 65 32 38	
ble4769c			

6f32fe28	00000080	31 64 65 36 00	1de6.
Value 1	Name: CurrentVersion	Type: REG_SZ	Data: 7.00.549
Value 2	Name: RegisteredOwner	Type: REG_SZ	Data: SAM&M
Value 3	Name: SerialNumber	Type: REG_DWORD	Data: 0x81530040
Key Name: SOFTWARE\Microsoft\MSSQLServer\MSSQLServer\Parameters			
	Class Name: <NO CLASS>	Last Write Time: 9/2/98 - 3:13 PM	
Value 0	Name: SQLArg0	Type: REG_SZ	Data: -dC:\MSSQL7\data\master.mdf
Value 1	Name: SQLArg1	Type: REG_SZ	Data: -eC:\MSSQL7\log\ERRORLOG
Value 2	Name: SQLArg2	Type: REG_SZ	Data: -lC:\MSSQL7\data\mastlog.ldf
Key Name: SOFTWARE\Microsoft\MSSQLServer\MSSQLServer\RPCNetLib			
	Class Name: <NO CLASS>	Last Write Time: 9/2/98 - 3:13 PM	
Value 0	Name: Security	Type: REG_SZ	Data:
Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers			
	Class Name: <NO CLASS>	Last Write Time: 9/2/98 - 3:16 PM	
Value 0	Name: AllowInProcess	Type: REG_DWORD	Data: 0x1

Key Name:  
SOFTWARE\Microsoft\MSSQLServer\Providers\ADSDSOObj  
ct  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name:  
SOFTWARE\Microsoft\MSSQLServer\Providers\DTSPackage  
DSO  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name:  
SOFTWARE\Microsoft\MSSQLServer\Providers\Microsoft.  
Jet.OLEDB.4.0  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSDAORA  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSDASQL  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Providers\MSIDXS  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name:  
SOFTWARE\Microsoft\MSSQLServer\Providers\MSQLImpPro  
v  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name:  
SOFTWARE\Microsoft\MSSQLServer\Providers\MSSEARCHSQ  
L  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name:  
SOFTWARE\Microsoft\MSSQLServer\Providers\SQLOLEDB  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:16 PM  
Value 0  
Name: AllowInProcess  
Type: REG\_DWORD  
Data: 0x1

Key Name: SOFTWARE\Microsoft\MSSQLServer\Replication  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:00 PM

Key Name:  
SOFTWARE\Microsoft\MSSQLServer\Replication\MergeRep  
licationProvider  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:00 PM

Key Name:  
SOFTWARE\Microsoft\MSSQLServer\Replication\MergeRep  
licationProvider\7.0  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:00 PM

Key Name:  
SOFTWARE\Microsoft\MSSQLServer\Replication\MergeRep  
licationProvider\7.0\MsJet  
Class Name: <NO CLASS>  
Last Write Time: 9/2/98 - 3:20 PM  
Value 0  
Name: <NO NAME>  
Type: REG\_SZ  
Data: {f159cf30-0db4-11d1-b272-00aa00b8de95}

		Data:	C:\MSSQL7\BINN\REPLMON.PMC
Key Name:	SOFTWARE\Microsoft\MSSQLServer\Setup	Key Name:	SOFTWARE\Microsoft\MSSQLServer\SQLLEW\Wizards
Class Name:	<NO CLASS>	Class Name:	<NO CLASS>
Last Write Time:	9/2/98 - 3:13 PM	Last Write Time:	9/2/98 - 3:16 PM
Value 0		Value 0	
Name:	SourcePath	Name:	Web Assistant
Type:	REG_SZ	Type:	REG_SZ
Data:	Z:\Sql70549.03p\x86\Data	Data:	C:\MSSQL7\BINN\semwebwz.DLL^WebWizardEntry
Value 1		Key Name:	SOFTWARE\Microsoft\MSSQLServer\SQLServerAgent
Name:	SQLDataRoot	Class Name:	<NO CLASS>
Type:	REG_SZ	Last Write Time:	9/2/98 - 3:16 PM
Data:	C:\MSSQL7	Value 0	
Value 2		Name:	DownloadedMaxRows
Name:	SQLPath	Type:	REG_DWORD
Type:	REG_SZ	Data:	0x64
Data:	C:\MSSQL7	Value 1	
Key Name:	SOFTWARE\Microsoft\MSSQLServer\SQL Service	Name:	ErrorLogFile
Manager		Type:	REG_SZ
Class Name:	<NO CLASS>	Data:	C:\MSSQL7\LOG\SQLAGENT.OUT
Last Write Time:	9/2/98 - 3:16 PM	Value 2	
Value 0		Name:	ErrorLoggingLevel
Name:	Action Verify	Type:	REG_DWORD
Type:	REG_DWORD	Data:	0x3
Data:	0	Value 3	
Value 1		Name:	JobHistoryMaxRows
Name:	DefaultSvc	Type:	REG_DWORD
Type:	REG_SZ	Data:	0x3e8
Data:	MSSQLServer	Value 4	
Value 2		Name:	JobHistoryMaxRowsPerJob
Name:	Remote	Type:	REG_DWORD
Type:	REG_DWORD	Data:	0x64
Data:	0x1	Value 5	
Value 3		Name:	MailAutoStart
Name:	Services	Type:	REG_DWORD
Type:	REG_MULTI_SZ	Data:	0x1
Data:	MSSQLServer	Value 6	
SQLServerAgent		Name:	MSXServerName
MSDTC		Type:	REG_SZ
Key Name:	SOFTWARE\Microsoft\MSSQLServer\SQLLEW	Data:	
Class Name:	<NO CLASS>	Value 7	
Last Write Time:	9/2/98 - 3:16 PM	Name:	NonAlertableErrors
Key Name:	SOFTWARE\Microsoft\MSSQLServer\SQLLEW\Replication	Type:	REG_SZ
Class Name:	<NO CLASS>	Data:	1204,4002
Last Write Time:	9/2/98 - 3:16 PM	Value 8	
Value 0		Name:	RestartSQLServer
Name:	PerfmonFile	Type:	REG_DWORD
Type:	REG_SZ	Data:	0x1

Value 9  
 Name: ServerHost  
 Type: REG\_SZ  
 Data:  
  
 Value 10  
 Name: WorkingDirectory  
 Type: REG\_SZ  
 Data: C:\MSSQL7\JOBS  
  
 Key Name:  
 SOFTWARE\Microsoft\MSSQLServer\SQLServerAgent\Subsystems  
 Class Name: <NO CLASS>  
 Last Write Time: 9/2/98 - 3:16 PM  
 Value 0  
 Name: ActiveScripting  
 Type: REG\_SZ  
 Data:  
 C:\MSSQL7\BINN\SQLATXSS.DLL,NULL,ActiveScriptStart,  
     ActiveScriptEvent,ActiveScriptStop,10  
  
 Value 1  
 Name: CmdExec  
 Type: REG\_SZ  
 Data:  
 C:\MSSQL7\BINN\SQLCMDSS.DLL,NULL,CmdExecStart,CmdEvent,CmdExecStop,10  
  
 Value 2  
 Name: Distribution  
 Type: REG\_SZ  
 Data:  
 C:\MSSQL7\BINN\SQLREPSS.DLL,C:\MSSQL7\BINN\DISTRIBEXE,ReplStart,ReplEvent,ReplStop,100  
  
 Value 3  
 Name: LogReader  
 Type: REG\_SZ  
 Data:  
 C:\MSSQL7\BINN\SQLREPSS.DLL,C:\MSSQL7\BINN\LOGREAD.EXE,ReplStart,ReplEvent,ReplStop,25  
  
 Value 4  
 Name: Merge  
 Type: REG\_SZ  
 Data:  
 C:\MSSQL7\BINN\SQLREPSS.DLL,C:\MSSQL7\BINN\REPLMERG.EXE,ReplStart,ReplEvent,ReplStop,100  
  
 Value 5  
 Name: Snapshot  
 Type: REG\_SZ  
 Data:  
 C:\MSSQL7\BINN\SQLREPSS.DLL,C:\MSSQL7\BINN\SNAPSHOT.EXE,ReplStart,ReplEvent,ReplStop,100

## Software\Intel\E100B

Key Name: SOFTWARE\Intel\E100B  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:01 AM  
  
 Key Name: SOFTWARE\Intel\E100B\CurrentVersion  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:01 AM  
 Value 0  
 Name: Description  
 Type: REG\_SZ  
 Data: Intel EtherExpress PRO Adapter Driver  
  
 Value 1  
 Name: InstallDate  
 Type: REG\_DWORD  
 Data: 0x357ec9fd  
  
 Value 2  
 Name: MajorVersion  
 Type: REG\_DWORD  
 Data: 0x3  
  
 Value 3  
 Name: MinorVersion  
 Type: REG\_DWORD  
 Data: 0  
  
 Value 4  
 Name: RefCount  
 Type: REG\_DWORD  
 Data: 0x1  
  
 Value 5  
 Name: ServiceName  
 Type: REG\_SZ  
 Data: E100B  
  
 Value 6  
 Name: SoftwareType  
 Type: REG\_SZ  
 Data: driver  
  
 Value 7  
 Name: Title  
 Type: REG\_SZ  
 Data: Intel EtherExpress PRO Adapter  
  
 Key Name: SOFTWARE\Intel\E100B\CurrentVersion\NetRules  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:01 AM  
 Value 0  
 Name: bindable  
 Type: REG\_MULTI\_SZ  
 Data: E100BDriver E100BAdapter non exclusive 100

Value 1	Name: bindform Type: REG_SZ Data: "E100BSys" yes no container
Value 2	Name: class Type: REG_MULTI_SZ Data: E100BDriver basic
Value 3	Name: InfName Type: REG_SZ Data: oemnad7.inf
Value 4	Name: InfOption Type: REG_SZ Data: E100BEXP
Value 5	Name: type Type: REG_SZ Data: E100BSys ndisDriver E100BDriver
Value 6	Name: use Type: REG_SZ Data: driver

## Services/dac960nt

Key Name:	SYSTEM\CurrentControlSet\Services\dac960nt
Class Name:	<NO CLASS>
Last Write Time:	6/17/98 - 6:48 PM
Value 0	Name: ErrorControl Type: REG_DWORD Data: 0x1
Value 1	Name: Group Type: REG_SZ Data: SCSI miniport
Value 2	Name: ImagePath Type: REG_EXPAND_SZ Data: System32\drivers\dac960nt.sys
Value 3	Name: PlugPlayServiceType Type: REG_DWORD Data: 0x1

Value 4	Name: RequestedSystemResources Type: REG_RESOURCE_REQUIREMENTS_LIST Data:  Interface Type: Internal Bus Number: 0 Slot Number: 0 List 0 Descriptor 0 Resource: Interrupt Option: 0x00000000 Disposition: Shared Type: Level Sensitive Minimum Vector: 0x20 Maximum Vector: 0x20
Descriptor 1	Resource: Memory Option: 0x00000001 Disposition: Device Exclusive Type: Write Only Length: 0x2000 Alignment: 0x2000 Minimum Address: 0xfe606000 Maximum Address: 0xfe607fff
Descriptor 2	Resource: Memory Option: 0x00000009 Disposition: Device Exclusive Type: Write Only Length: 0x2000 Alignment: 0x2000 Minimum Address: 0xfe606000 Maximum Address: 0xfe607fff

Value 5	Name: Start Type: REG_DWORD Data: 0
Value 6	Name: Tag Type: REG_DWORD Data: 0x63
Value 7	Name: Type Type: REG_DWORD Data: 0x1
Key Name:	SYSTEM\CurrentControlSet\Services\dac960nt\Enum
Class Name:	<NO CLASS>
Last Write Time:	6/17/98 - 6:46 PM
Value 0	

Name:	0
Type:	REG_SZ
Data:	Root\SCSIADAPTER\OEM1.INF&DAC960NT
Value 1	
Name:	Count
Type:	REG_DWORD
Data:	0x1
Value 2	
Name:	NextInstance
Type:	REG_DWORD
Data:	0x1

## Services/Disk

Key Name:	SYSTEM\CurrentControlSet\Services\Disk
Class Name:	<NO CLASS>
Last Write Time:	10/10/96 - 1:09 AM
Value 0	
Name:	DependOnGroup
Type:	REG_MULTI_SZ
Data:	SCSI miniport

Value 1	
Name:	ErrorControl
Type:	REG_DWORD
Data:	0

Value 2	
Name:	Group
Type:	REG_SZ
Data:	SCSI Class

Value 3	
Name:	Start
Type:	REG_DWORD
Data:	0

Value 4	
Name:	Tag
Type:	REG_DWORD
Data:	0x2

Value 5	
Name:	Type
Type:	REG_DWORD
Data:	0x1

Key Name:	SYSTEM\CurrentControlSet\Services\Disk\Enum
Class Name:	<NO CLASS>
Last Write Time:	6/17/98 - 6:46 PM
Value 0	
Name:	0
Type:	REG_SZ

Data:	Root\LEGACY_DISK\0000
Value 1	
Name:	Count
Type:	REG_DWORD
Data:	0x1
Value 2	
Name:	NextInstance
Type:	REG_DWORD
Data:	0x1

## Services/Diskperf

Key Name:	SYSTEM\CurrentControlSet\Services\Diskperf
Class Name:	<NO CLASS>
Last Write Time:	6/17/98 - 1:34 PM
Value 0	
Name:	ErrorControl
Type:	REG_DWORD
Data:	0x1

Value 1	
Name:	Group
Type:	REG_SZ
Data:	Filter

Value 2	
Name:	Start
Type:	REG_DWORD
Data:	0x4

Value 3	
Name:	Tag
Type:	REG_DWORD
Data:	0x4

Value 4	
Name:	Type
Type:	REG_DWORD
Data:	0x1

Key Name:	SYSTEM\CurrentControlSet\Services\Diskperf\Enum
Class Name:	<NO CLASS>
Last Write Time:	6/17/98 - 6:46 PM
Value 0	
Name:	0
Type:	REG_SZ
Data:	Root\LEGACY_DISKPERF\0000

Value 1	
Name:	Count
Type:	REG_DWORD
Data:	0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1

## Services\E100B

Key Name: SYSTEM\CurrentControlSet\Services\E100B  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:48 PM

Value 0  
 Name: DisplayName  
 Type: REG\_SZ  
 Data: Intel EtherExpress PRO Adapter

Value 1  
 Name: ErrorControl  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: Group  
 Type: REG\_SZ  
 Data: NDIS

Value 3  
 Name: ImagePath  
 Type: REG\_EXPAND\_SZ  
 Data: \SystemRoot\System32\drivers\e100bnt.sys

Value 4  
 Name: RequestedSystemResources  
 Type: REG\_RESOURCE\_REQUIREMENTS\_LIST  
 Data:  
 Interface Type: Internal  
 Bus Number: 0  
 Slot Number: 0  
 List 0  
 Descriptor 0  
 Resource: Interrupt  
 Option: 0x00000000  
 Disposition: Shared  
 Type: Level Sensitive  
 Minimum Vector: 0x1c  
 Maximum Vector: 0x1c

Descriptor 1  
 Resource: Memory  
 Option: 0x00000001  
 Disposition: Device Exclusive  
 Type: Write Only  
 Length: 0x1000  
 Alignment: 0x1000  
 Minimum Address: 0xfe306000  
 Maximum Address: 0xfe306fff

Descriptor 2  
 Resource: Memory  
 Option: 0x00000009  
 Disposition: Device Exclusive  
 Type: Write Only  
 Length: 0x1000  
 Alignment: 0x1000  
 Minimum Address: 0xfe306000  
 Maximum Address: 0xfe306fff

Descriptor 3  
 Resource: Memory  
 Option: 0x00000008  
 Disposition: Device Exclusive  
 Type: Write Only  
 Length: 0x1000  
 Alignment: 0x1000  
 Minimum Address: 0xfe000000  
 Maximum Address: 0xfe0fffff

Descriptor 4  
 Resource: Port  
 Option: 0x00000001  
 Disposition: Device Exclusive  
 Type: Port  
 Length: 0x20  
 Alignment: 0x20  
 Minimum Address: 0x00003000  
 Maximum Address: 0x0000301f

Descriptor 5  
 Resource: Port  
 Option: 0x00000008  
 Disposition: Device Exclusive  
 Type: Port  
 Length: 0x20  
 Alignment: 0x20  
 Minimum Address: 0x00003000  
 Maximum Address: 0x0000301f

Descriptor 6  
 Resource: Memory  
 Option: 0x00000001  
 Disposition: Device Exclusive  
 Type: Read / Write  
 Length: 0x100000  
 Alignment: 0x100000  
 Minimum Address: 0xfe000000  
 Maximum Address: 0xfe0fffff

Descriptor 7  
 Resource: Memory  
 Option: 0x00000008  
 Disposition: Device Exclusive  
 Type: Read / Write  
 Length: 0x100000  
 Alignment: 0x100000  
 Minimum Address: 0xfe000000  
 Maximum Address: 0xfe0fffff

Value 5  
 Name: Start  
 Type: REG\_DWORD  
 Data: 0x2

Value 6  
 Name: Type  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Enum  
 Class Name: <NO CLASS>  
 Last Write Time: 6/17/98 - 6:46 PM  
 Value 0  
 Name: 0  
 Type: REG\_SZ  
 Data: Root\LEGACY\_E100B\0000

Value 1  
 Name: Count  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: NextInstance  
 Type: REG\_DWORD  
 Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Linkage  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:07 AM  
 Value 0  
 Name: Bind  
 Type: REG\_MULTI\_SZ  
 Data: \Device\E100B1

Value 1  
 Name: Export  
 Type: REG\_MULTI\_SZ  
 Data: \Device\E100B1

Value 2  
 Name: Route  
 Type: REG\_MULTI\_SZ  
 Data: "E100B1"

Key Name:  
 SYSTEM\CurrentControlSet\Services\E100B\Linkage\Dis  
 abled  
 Class Name: GenericClass

Last Write Time: 6/10/98 - 4:07 AM  
 Value 0  
 Name: Bind  
 Type: REG\_MULTI\_SZ  
 Data:

Value 1  
 Name: Export  
 Type: REG\_MULTI\_SZ  
 Data:

Value 2  
 Name: Route  
 Type: REG\_MULTI\_SZ  
 Data:

Key Name:  
 SYSTEM\CurrentControlSet\Services\E100B\Parameters  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:01 AM

Key Name: SYSTEM\CurrentControlSet\Services\E100B\Security  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:01 AM  
 Value 0  
 Name: Security  
 Type: REG\_BINARY  
 Data:

00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00

.....  
 00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00

4.....  
 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00

.....  
 00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 00 18 00

.....  
 00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00

.....  
 00000050 73 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00

s.....  
 00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 00 b6 80 ....

...#.....  
 00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05

.....  
 00000080 20 00 00 00 20 02 00 00 - 00 00 b6 80 00 00 1c 00 ...

....  
 00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 00

```

000000a0 25 02 00 00 00 00 b6 80 - 00 00 18 00 fd 01 02 00
%.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....%
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....%
000000d0 00 00 00 05 12 00 00 00 -
.....%

```

## Services|E100B1

Key Name: SYSTEM\CurrentControlSet\Services\E100B1  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:01 AM  
 Value 0  
   Name: ErrorControl  
   Type: REG\_DWORD  
   Data: 0x1

Value 1  
   Name: Start  
   Type: REG\_DWORD  
   Data: 0x3

Value 2  
   Name: Type  
   Type: REG\_DWORD  
   Data: 0x4

Key Name: SYSTEM\CurrentControlSet\Services\E100B1\Linkage  
 Class Name: GenericClass  
 Last Write Time: 6/17/98 - 6:48 PM  
 Value 0  
   Name: Bind  
   Type: REG\_MULTI\_SZ  
   Data: \Device\E100B1

Value 1  
   Name: Export  
   Type: REG\_MULTI\_SZ  
   Data: \Device\E100B1

Value 2  
   Name: Route  
   Type: REG\_MULTI\_SZ  
   Data: "E100B1"

Key Name: SYSTEM\CurrentControlSet\Services\E100B1\Linkage\Disabled

Class Name:	GenericClass
Last Write Time:	6/10/98 - 4:01 AM
Key Name: SYSTEM\CurrentControlSet\Services\E100B1\Parameters	
Class Name:	GenericClass
Last Write Time:	6/12/98 - 11:46 AM
Value 0	
Name:	AdaptiveIFS
Type:	REG_DWORD
Data:	0x1
Value 1	
Name:	BusNumber
Type:	REG_DWORD
Data:	0x3
Value 2	
Name:	BusType
Type:	REG_DWORD
Data:	0x5
Value 3	
Name:	BusTypeLocal
Type:	REG_DWORD
Data:	0x5
Value 4	
Name:	Eid
Type:	REG_DWORD
Data:	0xc9c545c4
Value 5	
Name:	ForceDpx
Type:	REG_DWORD
Data:	0x1
Value 6	
Name:	MapRegisters
Type:	REG_DWORD
Data:	0x40
Value 7	
Name:	MediaType
Type:	REG_DWORD
Data:	0x1
Value 8	
Name:	MsPciScan
Type:	REG_DWORD
Data:	0x1
Value 9	
Name:	NetworkAddress
Type:	REG_SZ
Data:	0
Value 10	
Name:	NumCoalesce

Type:	REG_DWORD	Name:	TxFifo
Data:	0x10	Type:	REG_DWORD
Value 11		Data:	0x8
Name:	NumRfd	Value 23	
Type:	REG_DWORD	Name:	Txmitwait
Data:	0x40	Type:	REG_DWORD
Value 12		Data:	0x1
Name:	NumTbdPerTcb	Value 24	
Type:	REG_DWORD	Name:	UcodeSW
Data:	0xc	Type:	REG_DWORD
Value 13		Data:	0x1
Name:	NumTcb	Value 25	
Type:	REG_DWORD	Name:	UnderrunRetry
Data:	0x20	Type:	REG_DWORD
Value 14		Data:	0x1
Name:	PerfOptims	Key Name:	SYSTEM\CurrentControlSet\Services\E100B1\Parameters
Type:	REG_DWORD		\Tcpip
Data:	0x2	Class Name:	GenericClass
Value 15		Last Write Time:	6/17/98 - 6:48 PM
Name:	ProposeIAFTAddress	Value 0	
Type:	REG_SZ	Name:	DefaultGateway
Data:	00A0C9C545C4	Type:	REG_MULTI_SZ
Value 16		Data:	
Name:	RxDmaCount	Value 1	
Type:	REG_DWORD	Name:	EnableDHCP
Data:	0	Type:	REG_DWORD
Value 17		Data:	0
Name:	RxFifo	Value 2	
Type:	REG_DWORD	Name:	IPAddress
Data:	0x8	Type:	REG_MULTI_SZ
Value 18		Data:	192.168.91.214
Name:	SlotNumber	Value 3	
Type:	REG_DWORD	Name:	IPInterfaceContext
Data:	0x7	Type:	REG_DWORD
Value 19		Data:	0x1
Name:	Speed	Value 4	
Type:	REG_DWORD	Name:	IPInterfaceContextMax
Data:	0x64	Type:	REG_DWORD
Value 20		Data:	0x1
Name:	Threshold	Value 5	
Type:	REG_DWORD	Name:	LLInterface
Data:	0x10	Type:	REG_SZ
Value 21		Data:	
Name:	TxDmaCount	Value 6	
Type:	REG_DWORD	Name:	PPTPFiltering
Data:	0		
Value 22			

Type:	REG_DWORD		
Data:	0		
Value 7			
Name:	RawIPAllowedProtocols		
Type:	REG_MULTI_SZ		
Data:	0		
Value 8			
Name:	SubnetMask		
Type:	REG_MULTI_SZ		
Data:	255.255.255.0		
Value 9			
Name:	TCPAllowedPorts		
Type:	REG_MULTI_SZ		
Data:	0		
Value 10			
Name:	UDPAllowedPorts		
Type:	REG_MULTI_SZ		
Data:	0		
Value 11			
Name:	UseZeroBroadcast		
Type:	REG_DWORD		
Data:	0		
<b>Services\macdisk</b>			
Key Name:	SYSTEM\CurrentControlSet\Services\macdisk		
Class Name:	<NO CLASS>		
Last Write Time:	6/10/98 - 11:57 AM		
Value 0			
Name:	ErrorControl		
Type:	REG_DWORD		
Data:	0x1		
Value 1			
Name:	Group		
Type:	REG_SZ		
Data:	Filter		
Value 2			
Name:	ImagePath		
Type:	REG_EXPAND_SZ		
Data:	System32\drivers\macdisk.sys		
Value 3			
Name:	PlugPlayServiceType		
Type:	REG_DWORD		
Data:	0x1		
Value 4			
Name:	Start		
Type:	REG_DWORD		
Data:	0		
Value 5			
Name:	Tag		
Type:	REG_DWORD		
Data:	0x1		
Value 6			
Name:	Type		
Type:	REG_DWORD		
Data:	0x1		
Key Name:	SYSTEM\CurrentControlSet\Services\macdisk\Enum		
Class Name:	<NO CLASS>		
Last Write Time:	6/17/98 - 6:46 PM		
Value 0			
Name:	0		
Type:	REG_SZ		
Data:	Root\SCSIADAPTER\OEM2.INF&MACDISK		
Value 1			
Name:	Count		
Type:	REG_DWORD		
Data:	0x1		
Value 2			
Name:	NextInstance		
Type:	REG_DWORD		
Data:	0x1		
Key Name:	SYSTEM\CurrentControlSet\Services\macdisk\Security		
Class Name:	<NO CLASS>		
Last Write Time:	6/10/98 - 11:57 AM		
Value 0			
Name:	Security		
Type:	REG_BINARY		
Data:	00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00		
.....	.....		
	00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00		
4.....	.....		
	00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00		
	.....		
	00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00		
.....	.....		
	00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00		
	.....		

```

F.i.... 00000050 46 00 69 00 00 00 1c 00 - fd 01 02 00 01 02 00 00 00
..... 00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 6c 00 74 00 ....
...
#...l.t. 00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....
00000080 20 00 00 00 20 02 00 00 - 6c 00 74 00 00 00 00 1c 00 ...
...
l.t.... 00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0 25 02 00 00 6c 00 74 00 - 00 00 18 00 fd 01 02 00
%...l.t.
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
...
...%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
...
000000d0 00 00 00 05 12 00 00 00 -
.....

```

## Services\MSDTC

```

Key Name: SYSTEM\CurrentControlSet\Services\MSDTC\Security
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 1:00 PM
Value 0
  Name: Security
  Type: REG_BINARY
  Data:
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 00 18 00
.....
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050 00 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
.....
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 00 00 00 00
...
#.....

```

```

00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 00 05
.....
00000080 20 00 00 00 20 02 00 00 - 00 00 00 00 00 00 00 1c 00 ...
...
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....
000000a0 25 02 00 00 00 00 00 00 - 00 00 18 00 fd 01 02 00
%.....
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
...
...%...
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
...
000000d0 00 00 00 05 12 00 00 00 -
.....

```

## Services|MSSQLServer

Key Name:	SYSTEM\CurrentControlSet\Services\MSSQLServer						
Class Name:	<NO CLASS>						
Last Write Time:	6/10/98 - 1:01 PM						
Value 0	<table border="0"> <tr> <td>Name:</td> <td>DisplayName</td> </tr> <tr> <td>Type:</td> <td>REG_SZ</td> </tr> <tr> <td>Data:</td> <td>MSSQLServer</td> </tr> </table>	Name:	DisplayName	Type:	REG_SZ	Data:	MSSQLServer
Name:	DisplayName						
Type:	REG_SZ						
Data:	MSSQLServer						
Value 1	<table border="0"> <tr> <td>Name:</td> <td>ErrorControl</td> </tr> <tr> <td>Type:</td> <td>REG_DWORD</td> </tr> <tr> <td>Data:</td> <td>0x1</td> </tr> </table>	Name:	ErrorControl	Type:	REG_DWORD	Data:	0x1
Name:	ErrorControl						
Type:	REG_DWORD						
Data:	0x1						
Value 2	<table border="0"> <tr> <td>Name:</td> <td>ImagePath</td> </tr> <tr> <td>Type:</td> <td>REG_EXPAND_SZ</td> </tr> <tr> <td>Data:</td> <td>C:\MSSQL7\binn\sqlservr.exe</td> </tr> </table>	Name:	ImagePath	Type:	REG_EXPAND_SZ	Data:	C:\MSSQL7\binn\sqlservr.exe
Name:	ImagePath						
Type:	REG_EXPAND_SZ						
Data:	C:\MSSQL7\binn\sqlservr.exe						
Value 3	<table border="0"> <tr> <td>Name:</td> <td>ObjectName</td> </tr> <tr> <td>Type:</td> <td>REG_SZ</td> </tr> <tr> <td>Data:</td> <td>LocalSystem</td> </tr> </table>	Name:	ObjectName	Type:	REG_SZ	Data:	LocalSystem
Name:	ObjectName						
Type:	REG_SZ						
Data:	LocalSystem						
Value 4	<table border="0"> <tr> <td>Name:</td> <td>Start</td> </tr> <tr> <td>Type:</td> <td>REG_DWORD</td> </tr> <tr> <td>Data:</td> <td>0x3</td> </tr> </table>	Name:	Start	Type:	REG_DWORD	Data:	0x3
Name:	Start						
Type:	REG_DWORD						
Data:	0x3						
Value 5	<table border="0"> <tr> <td>Name:</td> <td>Type</td> </tr> <tr> <td>Type:</td> <td>REG_DWORD</td> </tr> <tr> <td>Data:</td> <td>0x10</td> </tr> </table>	Name:	Type	Type:	REG_DWORD	Data:	0x10
Name:	Type						
Type:	REG_DWORD						
Data:	0x10						

Key Name:  
SYSTEM\CurrentControlSet\Services\MSSQLServer\Enum

Class Name: <NO CLASS>  
Last Write Time: 6/17/98 - 6:46 PM  
Value 0  
Name: 0  
Type: REG\_SZ  
Data: Root\LEGACY\_MSSQLSERVER\0000

Value 1  
Name: Count  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: NextInstance  
Type: REG\_DWORD  
Data: 0x1

Key Name:  
SYSTEM\CurrentControlSet\Services\MSSQLServer\Performance

Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:01 PM  
Value 0  
Name: Close  
Type: REG\_SZ  
Data: CloseSQLPerformanceData

Value 1  
Name: Collect  
Type: REG\_SZ  
Data: CollectSQLPerformanceData

Value 2  
Name: First Counter  
Type: REG\_DWORD  
Data: 0x738

Value 3  
Name: First Help  
Type: REG\_DWORD  
Data: 0x739

Value 4  
Name: Last Counter  
Type: REG\_DWORD  
Data: 0x80a

Value 5  
Name: Last Help  
Type: REG\_DWORD  
Data: 0x80b

Value 6  
Name: Library  
Type: REG\_SZ  
Data: SQLCTR70.DLL

Value 7  
Name: Open  
Type: REG\_SZ  
Data: OpenSQLPerformanceData

Key Name:  
SYSTEM\CurrentControlSet\Services\MSSQLServer\Security

Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 1:00 PM  
Value  
Name: Security  
Type: REG\_BINARY  
Data:  
00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00  
.....  
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00  
4.....  
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
.....  
00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 00 18 00  
.....  
00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
.....  
00000050 4e 00 54 00 00 00 1c 00 - fd 01 02 00 01 02 00 00  
N.T.....  
00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 5c 00 73 00 ....  
...#...\s.  
00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05  
.....  
00000080 20 00 00 00 20 02 00 00 - 5c 00 73 00 00 00 1c 00 ...  
...\s....  
00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00  
.....  
000000a0 25 02 00 00 5c 00 73 00 - 00 00 18 00 fd 01 02 00  
%...\s..  
000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00  
.....  
....%...  
000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00  
.....  
000000d0 00 00 00 05 12 00 00 00 -

## Services\NDIS

Key Name: SYSTEM\CurrentControlSet\Services\NDIS  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: DisplayName  
Type: REG\_SZ  
Data: Microsoft NDIS System Driver

Value 1  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: Group  
Type: REG\_SZ  
Data: NDIS

Value 3  
Name: Start  
Type: REG\_DWORD  
Data: 0x1

Value 4  
Name: Type  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\Enum  
Class Name: <NO CLASS>  
Last Write Time: 6/17/98 - 6:46 PM  
Value 0  
Name: 0  
Type: REG\_SZ  
Data: Root\LEGACY\_NDIS\0000

Value 1  
Name: Count  
Type: REG\_DWORD  
Data: 0x1

Value 2  
Name: NextInstance  
Type: REG\_DWORD  
Data: 0x1

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\MediaTypes  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\3C592  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x20596d50

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0fffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: 3C592

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\3C597  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x70596d50

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0fffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: 3C597

Key Name: SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\BONSAI  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x62110e

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xfffffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: BONSAI

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\C320TNT  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM

Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x32530e

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xfffffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: C320TNT

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\DE425  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x5042a310

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xf0fffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: DE425

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\DEC300  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Value 0

Name: Id  
 Type: REG\_DWORD  
 Data: 0x230a310

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xfffffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: DEC300

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\DEC422  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x2042a310

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xf0fffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: DEC422

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\DURANGO  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x260110e

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xfffffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: DURANGO

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI

Class Name: SA\ELNK3EISA  
 <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x90506d50  
  
 Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xf0fffff  
  
 Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: ELNK3EISA  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\ES3210  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x12949  
  
 Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xfffffff  
  
 Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: ES3210  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\F70XX  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x6690e  
  
 Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xfffffff  
  
 Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: F70XX

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\FL32  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x1010d425  
  
 Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xffffffff  
  
 Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: FL32  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\FLNK  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x776d50  
  
 Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xffffffff  
  
 Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: FLNK  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\J2577A  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x4019f022  
  
 Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xf0fffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: J2577A

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\MAPLE  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x160110e

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xffffffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: MAPLE

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\NE3200  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x7cc3a

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xffffffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: NE3200

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\NETFLEX3  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM

Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x20f1110e

Value 1

Name: Mask  
 Type: REG\_DWORD  
 Data: 0xf0ffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: NETFLEX3

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\NETFLEX3.1  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM

Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x40f1110e

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xffffffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: NETFLEX3

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\NETFLX  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM

Value 0  
 Name: Id  
 Type: REG\_DWORD  
 Data: 0x61110e

Value 1  
 Name: Mask  
 Type: REG\_DWORD  
 Data: 0xffffffff

Value 2  
 Name: token  
 Type: REG\_SZ  
 Data: NETFLX

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
 SA\NF3500  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM

Value 0  
 Name: Id

Type: REG\_DWORD  
Data: 0x84633a

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NF3500

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\NPEISA.1

Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: id  
Type: REG\_DWORD  
Data: 0x2093a

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NPEISA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\NPEISA.2

Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: id  
Type: REG\_DWORD  
Data: 0x3093a

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: NPEISA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\P1990

Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x604f42

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: P1990

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\RODAN

Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x63110e

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: RODAN

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\SKETHNT

Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x2644d

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xffffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: SKETHNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\SKFENT

Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x1644d

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xfffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: SKFENT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\SMC8232

Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x80a34d

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xfffffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: SMC8232

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\TLNK3E

Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x9c616d50

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0fffff

Value 2

Name: token  
Type: REG\_SZ  
Data: TLNK3E

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\EI  
SA\TLNK3EISA

Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x90616d50

Value 1  
Name: Mask  
Type: REG\_DWORD  
Data: 0xf0fffff

Value 2  
Name: token  
Type: REG\_SZ  
Data: TLNK3EISA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A

Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\AT1700

Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x6413

Value 1  
Name: token  
Type: REG\_SZ  
Data: AT1700

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\EE16MC

Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x628b

Value 1

Name:	token
Type:	REG_SZ
Data:	EE16MC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\ELINK527  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0	
Name:	Id
Type:	REG_DWORD
Data:	0x41

Value 1	
Name:	token
Type:	REG_SZ
Data:	ELINK527

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\ELNK3MCA.1  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0	
Name:	Id
Type:	REG_DWORD
Data:	0x627c

Value 1	
Name:	token
Type:	REG_SZ
Data:	ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\ELNK3MCA.2  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0	
Name:	Id
Type:	REG_DWORD
Data:	0x627d

Value 1	
Name:	token
Type:	REG_SZ
Data:	ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\ELNK3MCA.3  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0	
---------	--

Name:	Id
Type:	REG_DWORD
Data:	0x61db

Value 1

Name:	token
Type:	REG_SZ
Data:	ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\ELNK3MCA.4  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0	
Name:	Id
Type:	REG_DWORD
Data:	0x62f6

Value 1	
Name:	token
Type:	REG_SZ
Data:	ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\ELNK3MCA.5  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0	
Name:	Id
Type:	REG_DWORD
Data:	0x62f7

Value 1	
Name:	token
Type:	REG_SZ
Data:	ELNK3MCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\ELNKM  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0	
Name:	Id
Type:	REG_DWORD
Data:	0x6042

Value 1	
Name:	token
Type:	REG_SZ
Data:	ELNKM

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\F30XX  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x70  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: F30XX  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\HPMCA  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x63ca  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: HPMCA  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\IBMENIIN  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0xffffe0  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: IBMENIIN  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\IBMTOKA  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0xe000  
  
 Value 1

Name: token  
 Type: REG\_SZ  
 Data: IBMTOKA  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\IBMTOKMC  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0xe001  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: IBMTOKMC  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\IRMATrac.1  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x5c1c  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: IRMATrac  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\IRMATrac.2  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x5c1d  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: IRMATrac  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\NCRTOK  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x100

Value 1  
Name: token  
Type: REG\_SZ  
Data: NCRTOK

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\NPMCA  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x69

Value 1  
Name: token  
Type: REG\_SZ  
Data: NPMCA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\OCTK16.1  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xa84

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCTK16

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\OCTK16.2  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xa85

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCTK16

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\OCTK16.3  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xa86

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCTK16

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\QUADENET.1  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8f6d

Value 1  
Name: token  
Type: REG\_SZ  
Data: QUADENET

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\QUADENET.2  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8f6a

Value 1  
Name: token  
Type: REG\_SZ  
Data: QUADENET

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\SKFMNT.1  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x83

Value 1

Name: token  
Type: REG\_SZ  
Data: SKFMNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\SKFMNT.2  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xab

Value 1  
Name: token  
Type: REG\_SZ  
Data: SKFMNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\STREAMER.1  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8fa0

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\STREAMER.2  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8fa2

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\STREAMER.3  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0x8fa8

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\STREAMER.4  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x8faa

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\TC\$4046E  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x51

Value 1  
Name: token  
Type: REG\_SZ  
Data: TC\$4046E

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
A\UBPS  
Class Name: <NO CLASS>  
Last Write Time: 10/10/96 - 1:09 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x7012

Value 1  
Name: token  
Type: REG\_SZ  
Data: UBPS

**Key Name:**  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\WAVELAN\_MCA  
**Class Name:** <NO CLASS>  
**Last Write Time:** 6/10/98 - 3:56 AM  
**Value 0**  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x6a14  
  
**Value 1**  
     Name: token  
     Type: REG\_SZ  
     Data: WAVELAN\_MCA

**Key Name:**  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\WD8003EA  
**Class Name:** <NO CLASS>  
**Last Write Time:** 10/10/96 - 1:09 AM  
**Value 0**  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x67c0  
  
**Value 1**  
     Name: token  
     Type: REG\_SZ  
     Data: WD8003EA

**Key Name:**  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\WD8003WA  
**Class Name:** <NO CLASS>  
**Last Write Time:** 10/10/96 - 1:09 AM  
**Value 0**  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x67c2  
  
**Value 1**  
     Name: token  
     Type: REG\_SZ  
     Data: WD8003WA

**Key Name:**  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\WD8013EPA  
**Class Name:** <NO CLASS>  
**Last Write Time:** 10/10/96 - 1:09 AM  
**Value 0**  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x61c8  
  
**Value 1**

**Name:** token  
**Type:** REG\_SZ  
**Data:** WD8013EPA

**Key Name:**  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\MC  
     A\WD8013WPA  
**Class Name:** <NO CLASS>  
**Last Write Time:** 10/10/96 - 1:09 AM  
**Value 0**  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x61c9  
  
**Value 1**  
     Name: token  
     Type: REG\_SZ  
     Data: WD8013WPA

**Key Name:**  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I  
**Class Name:** <NO CLASS>  
**Last Write Time:** 10/10/96 - 1:09 AM

**Key Name:**  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\3C590  
**Class Name:** <NO CLASS>  
**Last Write Time:** 6/10/98 - 3:56 AM  
**Value 0**  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x590010b7  
  
**Value 1**  
     Name: token  
     Type: REG\_SZ  
     Data: 3C590

**Key Name:**  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\3C595  
**Class Name:** <NO CLASS>  
**Last Write Time:** 6/10/98 - 3:56 AM  
**Value 0**  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x595010b7  
  
**Value 1**  
     Name: token  
     Type: REG\_SZ  
     Data: 3C595

Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\3C905  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x905010b7  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: 3C905  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\ALANE0  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 3:56 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x59009004  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: ALANE0  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\AMDPCI  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x20001022  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: AMDPCI  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\DC21040  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x21011  
  
 Value 1

Name: token  
 Type: REG\_SZ  
 Data: DC21040  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\DC21041  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x141011  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: DC21041  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\DC21140  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x91011  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: DC21140  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\DC21142  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0  
     Name: Id  
     Type: REG\_DWORD  
     Data: 0x191011  
  
 Value 1  
     Name: token  
     Type: REG\_SZ  
     Data: DC21142  
  
 Key Name:  
 SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
     I\DEFFPA  
 Class Name: <NO CLASS>  
 Last Write Time: 10/10/96 - 1:09 AM  
 Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0xf1011

Value 1  
Name: token  
Type: REG\_SZ  
Data: DEFPA

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\E100BPCI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x12298086  
  
Value 1  
Name: token  
Type: REG\_SZ  
Data: E100BPCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\E10PCI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x12268086  
  
Value 1  
Name: token  
Type: REG\_SZ  
Data: E10PCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\LEC  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x100110b6  
  
Value 1  
Name: token  
Type: REG\_SZ  
Data: LEC

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\NCPCI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x111bc

Value 1  
Name: token  
Type: REG\_SZ  
Data: NCPCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\NETFLEX3.1  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xf1300e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\NETFLEX3.2  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae320e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\NETFLEX3.3  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM  
Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae340e11

Value 1

Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\NETFLEX3.4  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae350e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\NETFLEX3.5  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae430e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\NETFLEX3.6  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0xae400e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\NETFLEX3.7  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0

Name: Id  
Type: REG\_DWORD  
Data: 0xf1500e11

Value 1  
Name: token  
Type: REG\_SZ  
Data: NETFLEX3

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\O100PCI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x11108d

Value 1  
Name: token  
Type: REG\_SZ  
Data: O100PCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\OCE4XMP  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x13108d

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCE4XMP

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\OCTK16  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x1108d

Value 1  
Name: token  
Type: REG\_SZ  
Data: OCTK16

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\RNSFDDI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x22001112

Value 1  
Name: token  
Type: REG\_SZ  
Data: RNSFDDI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\RTL8029  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x802910ec

Value 1  
Name: token  
Type: REG\_SZ  
Data: RTL8029

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\SKFPNT  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x40001148

Value 1  
Name: token  
Type: REG\_SZ  
Data: SKFPNT

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\SKTOKNT\_PCI  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x42001148

Value 1

Name: token  
Type: REG\_SZ  
Data: SKTOKNT\_PCI

Key Name:  
SYSTEM\CurrentControlSet\Services\NDIS\NetDetect\PC  
I\STREAMER  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 3:56 AM

Value 0  
Name: Id  
Type: REG\_DWORD  
Data: 0x181014

Value 1  
Name: token  
Type: REG\_SZ  
Data: STREAMER

Key Name:  
SYSTEM\CurrentControlSet\Parameters  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 2:17 PM

Value 0  
Name: ProcessorAffinityMask  
Type: REG\_DWORD  
Data: 0

## Services|NetBIOS

Key Name:  
SYSTEM\CurrentControlSet\NetBIOS  
<NO CLASS>  
Last Write Time: 6/10/98 - 4:07 AM

Value 0  
Name: DependOnGroup  
Type: REG\_MULTI\_SZ  
Data: TDI

Value 1  
Name: DependOnService  
Type: REG\_MULTI\_SZ  
Data:

Value 2  
Name: DisplayName  
Type: REG\_SZ  
Data: NetBIOS Interface

Value 3  
Name: ErrorControl  
Type: REG\_DWORD  
Data: 0x1

Value 4

Name: Group	Type: REG_SZ	Data: NetBIOSGroup	00000000 01 01	..
Value 5	Name: ImagePath	Type: REG_EXPAND_SZ	Value 3	Route
	Data: \\SystemRoot\\System32\\drivers\\netbios.sys		Name: "Nbf" "E100B" "E100B1"	REG_MULTI_SZ
Value 6	Name: Start	Type: REG_DWORD		
	Data: 0x3			
Value 7	Name: Type	Type: REG_DWORD	Key Name:	SYSTEM\\CurrentControlSet\\Services\\NetBIOS\\Linkage\\D isabled
	Data: 0x2		Class Name: GenericClass	
			Last Write Time: 6/10/98 - 4:07 AM	
			Value 0	
			Name: Bind	
			Type: REG_MULTI_SZ	
			Data: \\Device\\NetBT_E100B1	
Key Name: SYSTEM\\CurrentControlSet\\Services\\NetBIOS\\Enum	Value 1			
Class Name: <NO CLASS>	Name: Export			
Last Write Time: 6/17/98 - 6:46 PM	Type: REG_MULTI_SZ			
Value 0	Data: \\Device\\Netbios\\NetBT_E100B1			
Name: 0	Value 2			
Type: REG_SZ	Name: Route			
Data: Root\\LEGACY_NETBIOS\\0000	Type: REG_MULTI_SZ			
Value 1	Data: "NetBT" "E100B" "E100B1"			
Name: Count				
Type: REG_DWORD				
Data: 0x1				
Value 2			Key Name:	SYSTEM\\CurrentControlSet\\Services\\NetBIOS\\Parameter s
Name: NextInstance			Class Name: GenericClass	
Type: REG_DWORD			Last Write Time: 6/10/98 - 4:05 AM	
Data: 0x1				
Key Name: SYSTEM\\CurrentControlSet\\Services\\NetBIOS\\Linkage	Key Name:			
Class Name: GenericClass	SYSTEM\\CurrentControlSet\\Services\\NetBIOS\\Parameter			
Last Write Time: 6/10/98 - 4:07 AM	s			
Value 0	Class Name: GenericClass			
Name: Bind	Last Write Time: 6/10/98 - 4:05 AM			
Type: REG_MULTI_SZ	Value 0			
Data: \\Device\\Nbf_E100B1	Name: HelperDllName			
Value 1	Type: REG_EXPAND_SZ			
Name: Export	Data: %SystemRoot%\\system32\\wshnetbs.dll			
Type: REG_MULTI_SZ				
Data: \\Device\\Netbios\\Nbf_E100B1				
Value 1	Value 1			
Name: Mapping	Name: Mapping			
Type: REG_BINARY	Type: REG_BINARY			
Data: 00000000 02 00 00 00 03 00 00 00 - 11 00 00 00 05 00 00 00	Data: 00000000 02 00 00 00 03 00 00 00 - 11 00 00 00 05 00 00 00			
.....	.....			
	00000010 00 00 00 00 11 00 00 00 - 02 00 00 00 00 00 00 00			
Value 2	.....			
Name: LanaMap	.....			
Type: REG_BINARY	.....			
Data: .....	.....			

```

Value 2
Name: MaxSockAddrLength
Type: REG_DWORD
Data: 0x14

Value 3
Name: MinSockAddrLength
Type: REG_DWORD
Data: 0x14

Key Name:
SYSTEM\CurrentControlSet\Services\NetBIOS\Security
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name: Security
Type: REG_BINARY
Data:
00000000 01 00 14 80 cc 00 00 00 - d8 00 00 00 14 00 00 00
.....
00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
4.....
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000030 20 02 00 00 02 00 98 00 - 06 00 00 00 00 03 18 00
.....
00000040 00 00 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
.....
00000050 00 00 00 00 00 03 18 00 - ff 01 0f 00 01 02 00 00
.....
00000060 00 00 00 05 20 00 00 00 - 20 02 00 00 00 03 18 00 .....
00000070 ff 01 0f 00 01 01 00 00 - 00 00 00 05 12 00 00 00
.....
00000080 20 02 00 00 00 03 18 00 - 00 00 02 00 01 02 00 00
.....
00000090 00 00 00 05 20 00 00 00 - 23 02 00 00 00 03 18 00 .....
#.....
000000a0 9d 00 00 00 01 01 00 00 - 00 00 00 05 04 00 00 00
.....
000000b0 23 02 00 00 00 03 18 00 - 9d 00 00 00 01 02 00 00
#.....
000000c0 00 00 00 05 20 00 00 00 - 21 02 00 00 01 01 00 00 .....
!.....

```

```

000000d0 00 00 00 05 12 00 00 00 - 01 01 00 00 00 00 00 00 05
.....
000000e0 12 00 00 00
.....
Key Name:
SYSTEM\CurrentControlSet\Services\NetBIOSInformatio
n
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM
Value 0
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 1
Name: Start
Type: REG_DWORD
Data: 0x3

Value 2
Name: Type
Type: REG_DWORD
Data: 0x4

Key Name:
SYSTEM\CurrentControlSet\Services\NetBIOSInformatio
n\Linkage
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM

Key Name:
SYSTEM\CurrentControlSet\Services\NetBIOSInformatio
n\Linkage\Disabled
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:05 AM

Key Name:
SYSTEM\CurrentControlSet\Services\NetBIOSInformatio
n\Parameters
Class Name: GenericClass
Last Write Time: 6/10/98 - 4:07 AM
Value 0
Name: EnumExport1
Type: REG_DWORD
Data: 0x1

Value 1
Name: EnumExport2
Type: REG_DWORD
Data: 0x1

Value 2
Name: LanNum1
Type: REG_DWORD
Data: 0
.....

```

Value 3	Name: LanaNum2	Type: REG_DWORD	Data: 0x1
Value 4	Name: MaxLana	Type: REG_DWORD	Data: 0x1
Value 5	Name: Route	Type: REG_MULTI_SZ	Data: "NetBT" "E100B" "E100B1" "Nbf" "E100B" "E100B1"

## Services\NetBT

Key Name:	SYSTEM\CurrentControlSet\Services\NetBT		
Class Name:	<NO CLASS>		
Last Write Time:	6/10/98 - 4:07 AM		
Value 0	Name: DependOnGroup	Type: REG_MULTI_SZ	Data:
Value 1	Name: DependOnService	Type: REG_MULTI_SZ	Data: Tcpip
Value 2	Name: DisplayName	Type: REG_SZ	Data: WINS Client (TCP/IP)
Value 3	Name: ErrorControl	Type: REG_DWORD	Data: 0x1
Value 4	Name: Group	Type: REG_SZ	Data: PNP_TDI
Value 5	Name: ImagePath	Type: REG_EXPAND_SZ	Data: \SystemRoot\System32\drivers\netbt.sys
Value 6	Name: Start	Type: REG_DWORD	Data: 0x2

Value 7	Name: Type	Type: REG_DWORD	Data: 0x1
Key Name:	SYSTEM\CurrentControlSet\Services\NetBT\Adapters		
Class Name:	GenericClass		
Last Write Time:	6/10/98 - 4:05 AM		
Key Name:	SYSTEM\CurrentControlSet\Services\NetBT\Adapters\E1		
Class Name:	GenericClass		
Last Write Time:	6/10/98 - 4:07 AM		
Value 0	Name: NameServer	Type: REG_SZ	Data:
Value 1	Name: NameServerBackup	Type: REG_SZ	Data:
Key Name:	SYSTEM\CurrentControlSet\Services\NetBT\Enum		
Class Name:	<NO CLASS>		
Last Write Time:	6/17/98 - 6:48 PM		
Value 0	Name: Count	Type: REG_DWORD	Data: 0
Value 1	Name: NextInstance	Type: REG_DWORD	Data: 0
Key Name:	SYSTEM\CurrentControlSet\Services\NetBT\Linkage		
Class Name:	GenericClass		
Last Write Time:	6/10/98 - 4:07 AM		
Value 0	Name: Bind	Type: REG_MULTI_SZ	Data:
Value 1	Name: Export	Type: REG_MULTI_SZ	Data:
Value 2	Name: OtherDependencies	Type: REG_MULTI_SZ	Data: Tcpip

Value 3	Name: Route Type: REG_MULTI_SZ Data:	Value 5	Name: EnableProxy Type: REG_DWORD Data: 0
Key Name: SYSTEM\CurrentControlSet\Services\NetBT\Linkage\Disabled	Class Name: GenericClass Last Write Time: 6/10/98 - 4:07 AM	Value 6	Name: NameServerPort Type: REG_DWORD Data: 0x89
Value 0	Name: Bind Type: REG_MULTI_SZ Data: \Device\E100B1	Value 7	Name: NameSrvQueryCount Type: REG_DWORD Data: 0x3
Value 1	Name: Export Type: REG_MULTI_SZ Data: \Device\NetBT_E100B1	Value 8	Name: NameSrvQueryTimeout Type: REG_DWORD Data: 0x5dc
Value 2	Name: Route Type: REG_MULTI_SZ Data: "E100B" "E100B1"	Value 9	Name: NbProvider Type: REG_SZ Data: _tcp
Key Name: SYSTEM\CurrentControlSet\Services\NetBT\Parameters	Class Name: GenericClass Last Write Time: 6/10/98 - 4:07 AM	Value 10	Name: ScopeID Type: REG_SZ Data:
Value 0	Name: BcastNameQueryCount Type: REG_DWORD Data: 0x3	Value 11	Name: SessionKeepAlive Type: REG_DWORD Data: 0x36ee80
Value 1	Name: BcastQueryTimeout Type: REG_DWORD Data: 0x2ee	Value 12	Name: Size/Small/Medium/Large Type: REG_DWORD Data: 0x1
Value 2	Name: CacheTimeout Type: REG_DWORD Data: 0x927c0	Value 13	Name: TransportBindName Type: REG_SZ Data: \Device\
Value 3	Name: EnableDNS Type: REG_DWORD Data: 0	Key Name:	SYSTEM\CurrentControlSet\Services\NetBT\Security
Value 4	Name: EnableLMHOSTS Type: REG_DWORD Data: 0x1	Class Name:	<NO CLASS>
		Last Write Time:	6/10/98 - 4:05 AM
		Value 0	Name: Security Type: REG_BINARY Data: 00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
		.....	.....
			00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00
		4.....	.

.....	00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00	Name: AdapterDescription Type: REG_SZ Data: EPRO100_GetAdapterDescription
.....	00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 00 18 00	Value 1 Name: Configure Type: REG_SZ Data: EPRO100_Configure
.....	00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00	Value 2 Name: Detect Type: REG_SZ Data: EPRO100_Detect
.....	00000050 01 01 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00	Value 3 Name: DeviceExist Type: REG_SZ Data: EPRO100_DeviceExist
...	00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 00 00 00 05 ....	Value 4 Name: Diagnose Type: REG_SZ Data: EPRO100_Diagnose
#.....	00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05	Value 5 Name: DLL Type: REG_SZ Data: EPRO100.DLL
.....	00000080 20 00 00 00 20 02 00 00 - 00 00 00 05 00 00 1c 00 ...	Value 6 Name: GetExtendedFeatures Type: REG_SZ Data: EPRO100_GetExtendedFeatures
.....	00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00	Value 7 Name: Help Type: REG_SZ Data: E100SET.HLP
%.....	000000a0 25 02 00 00 00 00 00 05 - 00 00 18 00 fd 01 02 00	Value 8 Name: InstallAnyway Type: REG_SZ Data: EPRO100_InstallAnyway
.....	000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00	Value 9 Name: RegistryKey Type: REG_SZ Data: EPRO100_GetRegistryKey
....%	000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00	Value 10 Name: Summary Type: REG_SZ Data: EPRO100_Resource_Summary
.....	000000d0 00 00 00 05 12 00 00 00 -	

## Services\PROSet

Key Name: SYSTEM\CurrentControlSet\Services\PROSet  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:01 AM

Key Name: SYSTEM\CurrentControlSet\Services\PROSet\Adapters  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:01 AM  
 Value 0  
 Name: EPRO100  
 Type: REG\_SZ  
 Data: Intel EtherExpress PRO Adapter

Key Name: SYSTEM\CurrentControlSet\Services\PROSet\EPRO100  
 Class Name: GenericClass  
 Last Write Time: 6/10/98 - 4:01 AM  
 Value 0

Key Name: SYSTEM\CurrentControlSet\Services\PROSet\EPRO100\Parameters  
 Class Name: GenericClass

Last Write Time:	6/10/98 - 4:01 AM		
Value 0		Data:	1,7,Coalesce Buffers,0,2,8,1,32,1
Name:	Adaptive_IFS	Name:	
Type:	REG_SZ	Type:	
Data:	1,7,Adaptive Inter-Frame Spacing,0,2,1,0,255,1	Data:	
Value 1		Value 12	
Name:	BusNumber	Name:	NumRfd
Type:	REG_SZ	Type:	REG_SZ
Data:	0,7,BusNumber,0,2,0,0,16,1	Data:	1,7,Receive Buffers,0,2,32,1,1024,1
Value 2		Value 13	
Name:	BusType	Name:	NumTbd
Type:	REG_SZ	Type:	REG_SZ
Data:	0,7,BusType,0,2,5,2,5,1	Data:	0,3,Transmit Buffer Descriptors,0,2,64,1,65535,1
Value 3		Value 14	
Name:	BusTypeLocal	Name:	NumTbdPerTcb
Type:	REG_SZ	Type:	REG_SZ
Data:	0,7,BusTypeLocal,0,2,5,2,5,1	Data:	0,4,Transmit Buffers per Frame,0,2,12,1,16,1
Value 4		Value 15	
Name:	Eid	Name:	NumTcb
Type:	REG_SZ	Type:	REG_SZ
Data:	0,7,Eid,0,2,0,0,4294967295,1	Data:	1,7,Transmit Control Blocks,0,2,16,1,80,1
Value 5		Value 16	
Name:	Fifo	Name:	Off
Type:	REG_SZ	Type:	REG_SZ
Data:	0,3,Fifo Depth,0,2,12,0,15,1	Data:	1,3,Off Timer,0,2,2,1,65535,1
Value 6		Value 17	
Name:	ForceDpx	Name:	On
Type:	REG_SZ	Type:	REG_SZ
Data:	1,4,Duplex Mode,0,1,Auto,Auto,Half,Full	Data:	1,3,On Timer,0,2,32768,1,65535,1
Value 7		Value 18	
Name:	MapRegisters	Name:	PerfOptims
Type:	REG_SZ	Type:	REG_SZ
Data:		Data:	0,4,PerfOptims,0,2,0,0,65535,1
Value 8		Value 19	
Name:	MediaType	Name:	RxDmaCount
Type:	REG_SZ	Type:	REG_SZ
Data:	0,7,MediaType,0,2,1,1,1,1	Data:	0,4,RxDmaCount,0,2,0,0,63,1
Value 9		Value 20	
Name:	MsPciScan	Name:	RxFifo
Type:	REG_SZ	Type:	REG_SZ
Data:	0,4,MsPciScan,0,2,1,0,1,1	Data:	0,4,Receive Fifo Depth,0,2,8,0,15,1
Value 10		Value 21	
Name:	NetworkAddress	Name:	Slot
Type:	REG_SZ	Type:	REG_SZ
Data:	1,7,Locally Administered Address,0,5,0,0,1,1	Data:	
Value 11		Value 22	
Name:	NumCoalesce	Name:	Speed
Type:	REG_SZ	Type:	REG_SZ
Data:		Data:	1,7,Network
			Speed,0,4,Auto,Auto,0,10Mbps,10,100Mbps ,100

Value 23	Name: Threshold Type: REG_SZ Data: 0,7,Transmit Threshold,0,2,16,0,200,1	Value 4	Name: ImagePath Type: REG_EXPAND_SZ Data: %SystemRoot%\System32\snmp.exe
Value 24	Name: TxDmaCount Type: REG_SZ Data: 0,4,TxDmaCount,0,2,0,0,63,1	Value 5	Name: ObjectName Type: REG_SZ Data: LocalSystem
Value 25	Name: TxFifo Type: REG_SZ Data: 0,4,Transmit Fifo Depth,0,2,8,0,15,1	Value 6	Name: Start Type: REG_DWORD Data: 0x2
Value 26	Name: Txmitwait Type: REG_SZ Data: 0,7,Txmitwait,0,2,1,0,255,1	Value 7	Name: Type Type: REG_DWORD Data: 0x10
Value 27	Name: UcodeSW Type: REG_SZ Data: 0,7,UcodeSW,0,2,1,0,1,1	Key Name:	SYSTEM\CurrentControlSet\Services\SNMP\Enum
Value 28	Name: UnderrunRetry Type: REG_SZ Data: 0,4,UnderrunRetry,0,2,1,0,3,1	Class Name:	<NO CLASS>
<b>Services\SNMP</b>		Last Write Time:	6/17/98 - 6:46 PM
Value 0	Name: DependOnGroup Type: REG_MULTI_SZ Data:	Value 0	Name: 0 Type: REG_SZ Data: Root\LEGACY_SNMP\0000
Value 1	Name: DependOnService Type: REG_MULTI_SZ Data: Tcpip EventLog	Value 1	Name: Count Type: REG_DWORD Data: 0x1
Value 2	Name: DisplayName Type: REG_SZ Data: SNMP	Value 2	Name: NextInstance Type: REG_DWORD Data: 0x1
Value 3	Name: ErrorControl Type: REG_DWORD Data: 0x1	Key Name:	SYSTEM\CurrentControlSet\Services\SNMP\Linkage
		Class Name:	GenericClass
		Last Write Time:	6/10/98 - 4:05 AM
		Key Name:	SYSTEM\CurrentControlSet\Services\SNMP\Linkage\Disabled
		Class Name:	GenericClass
		Last Write Time:	6/10/98 - 4:05 AM
		Key Name:	SYSTEM\CurrentControlSet\Services\SNMP\Parameters
		Class Name:	GenericClass
		Last Write Time:	6/10/98 - 4:05 AM
		Key Name:	SYSTEM\CurrentControlSet\Services\SNMP\Parameters\EnableAuthenticationTraps
		Class Name:	GenericClass

```

Last Write Time: 6/10/98 - 4:05 AM
Value 0
  Name: switch
  Type: REG_DWORD
  Data: 0x1

  Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Parameters\ExtensionsAgents
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:05 AM
  Value 0
    Name: 1
    Type: REG_SZ
    Data:

SYSTEM\CurrentControlSet\Services\SNMP\Parameters\PermittedManagers
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:05 AM

  Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Parameters\RFC1156Agent
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:06 AM
  Value 0
    Name: sysContact
    Type: REG_SZ
    Data: SAM&M

  Value 1
    Name: sysLocation
    Type: REG_SZ
    Data: MV Performance Lab

  Value 2
    Name: sysServices
    Type: REG_DWORD
    Data: 0x4c

  Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Parameters\TrapConfiguration
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:05 AM

  Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Parameters\ValidCommunities
  Class Name: GenericClass
  Last Write Time: 6/10/98 - 4:05 AM
  Value 0
    Name: 1
    Type: REG_SZ
    Data: public

```

```

Key Name: SYSTEM\CurrentControlSet\Services\SNMP\Security
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 4:05 AM
Value 0
  Name: Security
  Type: REG_BINARY
  Data:
    00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00
    .....
    00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 00 02 80 18 00
    4.....
    .....
    00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00
    .....
    .....
    00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 00 18 00
    .....
    .....
    00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00
    .....
    .....
    00000050 12 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
    .....
    .....
    00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 01 01 00 00
    ...
    #.....
    00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
    .....
    .....
    00000080 20 00 00 00 20 02 00 00 - 01 01 00 00 00 00 00 1c 00
    ...
    .....
    00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
    .....
    .....
    000000a0 25 02 00 00 01 01 00 00 - 00 00 18 00 fd 01 02 00
    %.....
    .....
    000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
    .....
    .....
    000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
    .....
    .....
    000000d0 00 00 00 05 12 00 00 00 -
```

## Services\SQLServerAgent

```

Key Name: SYSTEM\CurrentControlSet\Services\SQLServerAgent
Class Name: <NO CLASS>
Last Write Time: 6/10/98 - 1:01 PM

```

Value 0	Name: DependOnGroup Type: REG_MULTI_SZ Data:	..... 00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 00 18 00 ..... 00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00 00 ..... 00000050 00 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00 ..... 00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 00 89 ba fd .....
Value 1	Name: DependOnService Type: REG_MULTI_SZ Data: MSSQLServer	..... #..... 00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05 ..... 00000080 20 00 00 00 20 02 00 00 - 00 89 ba fd 00 00 1c 00 ... .... 00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
Value 2	Name: DisplayName Type: REG_SZ Data: SQLServerAgent	..... #..... 00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05 ..... 00000080 20 00 00 00 20 02 00 00 - 00 89 ba fd 00 00 1c 00 ... .... 00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
Value 3	Name: ErrorControl Type: REG_DWORD Data: 0x1	..... 000000a0 25 02 00 00 00 89 ba fd - 00 00 18 00 fd 01 02 00 %..... 000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00 ..... ....%.. 000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00 ..... 000000d0 00 00 00 05 12 00 00 00 -
Value 4	Name: ImagePath Type: REG_EXPAND_SZ Data: C:\MSSQL7\binn\sqlagent.exe	..... 000000a0 25 02 00 00 00 89 ba fd - 00 00 18 00 fd 01 02 00 %..... 000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00 ..... ....%.. 000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00 ..... 000000d0 00 00 00 05 12 00 00 00 -
Value 5	Name: ObjectName Type: REG_SZ Data: LocalSystem	..... 000000d0 00 00 00 05 12 00 00 00 -
Value 6	Name: Start Type: REG_DWORD Data: 0x3	..... 000000d0 00 00 00 05 12 00 00 00 -
Value 7	Name: Type Type: REG_DWORD Data: 0x10	..... 000000d0 00 00 00 05 12 00 00 00 -
Key Name: SYSTEM\CurrentControlSet\Services\SQLServerAgent\Se urity Class Name: <NO CLASS> Last Write Time: 6/10/98 - 1:01 PM		
Value 0	Name: Security Type: REG_BINARY Data:	Key Name: SYSTEM\CurrentControlSet\Services\Tcpip Class Name: <NO CLASS> Last Write Time: 6/10/98 - 4:06 AM Value 0 Name: DisplayName Type: REG_SZ Data: TCP/IP Service
.....	00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00	Value 1 Name: ErrorControl Type: REG_DWORD Data: 0x1
.....	00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00	Value 2 Name: Group Type: REG_SZ Data: PNP_TDI
4.....	00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00	Value 3 Name: ImagePath
.....	.....	.....

Type: REG_EXPAND_SZ Data: \SystemRoot\System32\drivers\tcpip.sys	Value 0 Name: Bind Type: REG_MULTI_SZ Data:
Value 4 Name: Start Type: REG_DWORD Data: 0x2	Value 1 Name: Export Type: REG_MULTI_SZ Data:
Value 5 Name: Type Type: REG_DWORD Data: 0x1	Value 2 Name: Route Type: REG_MULTI_SZ Data:
Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Enum Class Name: <NO CLASS> Last Write Time: 6/17/98 - 6:46 PM	Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Parameters Class Name: GenericClass Last Write Time: 6/10/98 - 11:28 AM
Value 0 Name: 0 Type: REG_SZ Data: Root\LEGACY_TCPIP\0000	Value 0 Name: DataBasePath Type: REG_EXPAND_SZ Data: %SystemRoot%\System32\drivers\etc
Value 1 Name: Count Type: REG_DWORD Data: 0x1	Value 1 Name: Domain Type: REG_SZ Data: mv.unisys.com
Value 2 Name: NextInstance Type: REG_DWORD Data: 0x1	Value 2 Name: EnableSecurityFilters Type: REG_DWORD Data: 0
Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Linkage Class Name: GenericClass Last Write Time: 6/10/98 - 4:07 AM	Value 3 Name: ForwardBroadcasts Type: REG_DWORD Data: 0
Value 0 Name: Bind Type: REG_MULTI_SZ Data: \Device\E100B1	Value 4 Name: Hostname Type: REG_SZ Data: avalon4
Value 1 Name: Export Type: REG_MULTI_SZ Data: \Device\Tcpip\E100B1	Value 5 Name: IPEnableRouter Type: REG_DWORD Data: 0
Value 2 Name: Route Type: REG_MULTI_SZ Data: "E100B" "E100B1"	Value 6 Name: KeepAliveInterval Type: REG_DWORD Data: 0x2710
Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Linkage\Dis abled Class Name: GenericClass Last Write Time: 6/10/98 - 4:07 AM	Value 7 Name: NameServer Type: REG_SZ Data:

Value 8  
Name: SearchList  
Type: REG\_SZ  
Data:

Value 9  
Name: TcpAverageRTT  
Type: REG\_DWORD  
Data: 0x3e8

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\  
PersistentRoutes  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Parameters\  
Winsock  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM  
Value 0  
Name: HelperDllName  
Type: REG\_EXPAND\_SZ  
Data: %SystemRoot%\System32\wshtcpip.dll

Value 1  
Name: Mapping  
Type: REG\_BINARY  
Data:

00000000 0b 00 00 00 03 00 00 00 - 02 00 00 00 01 00 00 00

00000010 06 00 00 00 02 00 00 00 - 01 00 00 00 00 00 00 00

00000020 02 00 00 00 00 00 00 00 - 06 00 00 00 00 00 00 00

00000030 00 00 00 00 06 00 00 00 - 00 00 00 00 01 00 00 00

00000040 06 00 00 00 02 00 00 00 - 02 00 00 00 11 00 00 00

00000050 02 00 00 00 02 00 00 00 - 00 00 00 00 02 00 00 00

00000060 00 00 00 00 11 00 00 00 - 00 00 00 00 00 00 00 00

00000070 11 00 00 00 00 00 00 00 - 02 00 00 00 11 00 00 00

00000080 02 00 00 00 03 00 00 00 - 00 00 00 00

Value 2  
Name: MaxSockAddrLength  
Type: REG\_DWORD  
Data: 0x10

Value 3  
Name: MinSockAddrLength  
Type: REG\_DWORD  
Data: 0x10

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\Performance  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Value 0  
Name: Close  
Type: REG\_SZ  
Data: CloseTcpIpPerformanceData

Value 1  
Name: Collect  
Type: REG\_SZ  
Data: CollectTcpIpPerformanceData

Value 2  
Name: Library  
Type: REG\_SZ  
Data: Perfctrs.dll

Value 3  
Name: Open  
Type: REG\_SZ  
Data: OpenTcpIpPerformanceData

Key Name: SYSTEM\CurrentControlSet\Services\Tcpip\Security  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 4:05 AM

Value 0  
Name: Security  
Type: REG\_BINARY  
Data:

00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00

00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00

4..... .

00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00

00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00

00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00

00000050	6d 00 00 00 00 00 1c 00 - fd 01 02 00 01 02 00 00
m.....	
.....	00 00 00 05 20 00 00 00 - 23 02 00 00 43 00 48 00 ....
...	
#...C.H.	
00000070	00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05
.....	
00000080	20 00 00 00 20 02 00 00 - 43 00 48 00 00 00 00 1c 00 ...
...	
C.H....	
00000090	ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00
.....	
.....	000000a0 25 02 00 00 43 00 48 00 - 00 00 18 00 fd 01 02 00
%...C.H.	
.....	000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00
.....	
....%	
000000c0	01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00
.....	
.....	000000d0 00 00 00 05 12 00 00 00 -
.....	

Key Name:  
SYSTEM\CurrentControlSet\Services\Tcpip\ServiceProvider  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Value 0	Name: Class Type: REG_DWORD Data: 0x8
Value 1	Name: DnsPriority Type: REG_DWORD Data: 0x7d0
Value 2	Name: HostsPriority Type: REG_DWORD Data: 0x1f4
Value 3	Name: LocalPriority Type: REG_DWORD Data: 0x1f3
Value 4	Name: Name Type: REG_SZ Data: TCP/IP
Value 5	

Name:	NetbtPriority
Type:	REG_DWORD
Data:	0x7d1
Value 6	
Name:	ProviderPath
Type:	REG_EXPAND_SZ
Data:	%SystemRoot%\System32\wsock32.dll

### Services\WinSock

Key Name: SYSTEM\CurrentControlSet\Services\WinSock  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Value 0	Name: ErrorControl Type: REG_DWORD Data: 0x1
Value 1	Name: Start Type: REG_DWORD Data: 0x3
Value 2	Name: Type Type: REG_DWORD Data: 0x4

Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Autodial  
Class Name: <NO CLASS>  
Last Write Time: 6/10/98 - 11:59 AM

Value 0	Name: AutodialDllName32 Type: REG_SZ Data: wininet.dll
Value 1	Name: AutodialFcnName32 Type: REG_SZ Data: InternetAutodialCallback

Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Linkage  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Linkage\Disabled  
Class Name: GenericClass  
Last Write Time: 6/10/98 - 4:05 AM

	<p>Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Parameter</p> <p>Class Name: GenericClass Last Write Time: 6/10/98 - 4:05 AM Value 0</p> <p>Name: Transports Type: REG_MULTI_SZ Data: Tcpip NetBIOS</p>		<p>00000010 05 00 00 00 ff ff ff ff - 00 fa 00 00 66 00 00 00 ..... ....f... 00000020 09 12 00 00 11 00 00 00 - 14 00 00 00 14 00 00 00 ..... ..... 00000030 02 00 00 00 ff ff ff ff - 00 fa 00 00 40 00 00 00 ..... ...@... 00000040 5c 00 44 00 65 00 76 00 - 69 00 63 00 65 00 5c 00 \.D.e.v. i.c.e.\. 00000050 4e 00 62 00 66 00 5f 00 - 45 00 31 00 30 00 30 00 N.b.f._. E.1.0.0. 00000060 42 00 31 00 00 00 5c 00 - 44 00 65 00 76 00 69 00 B.1...\. D.e.v.i. 00000070 63 00 65 00 5c 00 4e 00 - 62 00 66 00 5f 00 45 00 c.e.\.N. b.f._.E. 00000080 31 00 30 00 30 00 42 00 - 31 00 00 00 1.0.0.B. 1...  Value 1 Name: WinSock 2.0 Provider ID Type: REG_BINARY Data: 00000000 30 18 5f 8d 73 c2 cf 11 - 95 c8 00 80 5f 48 a1 92 0._.s... ...._H..</p>	
Mig	<p>Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Setup</p> <p>Class Name: &lt;NO CLASS&gt; Last Write Time: 6/10/98 - 4:07 AM Value 0</p> <p>Name: Known Static Providers Type: REG_MULTI_SZ Data: Tcpip NwlnkIpx NwlnkSpx AppleTalk IsoTp</p>			
	<p>Value 1</p> <p>Name: Provider List Type: REG_MULTI_SZ Data: Tcpip NetBIOS</p>			
	<p>Value 2</p> <p>Name: Setup Version Type: REG_DWORD Data: 0x1009</p>			
Mig	<p>Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Setup</p> <p>Class Name: ration\Providers &lt;NO CLASS&gt; Last Write Time: 6/10/98 - 4:06 AM</p>		<p>Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Setup</p> <p>Class Name: ration\Providers\Tcpip &lt;NO CLASS&gt; Last Write Time: 6/10/98 - 4:06 AM Value 0</p> <p>Name: WinSock 2.0 Provider ID Type: REG_BINARY Data: 00000000 a0 1a 0f e7 8b ab cf 11 - 8c a3 00 80 5f 48 a1 92 ..... ...._H..</p>	
	<p>Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Setup</p> <p>Class Name: ration\Providers\NetBIOS &lt;NO CLASS&gt; Last Write Time: 6/10/98 - 4:07 AM Value 0</p> <p>Name: WinSock 1.1 Provider Data Type: REG_BINARY Data: 00000000 0e 10 00 00 11 00 00 00 - 14 00 00 00 14 00 00 00 ..... .....</p>		<p>Key Name: SYSTEM\CurrentControlSet\Services\WinSock\Setup</p> <p>Class Name: ration\Well Known Guids &lt;NO CLASS&gt; Last Write Time: 6/10/98 - 4:06 AM Value 0</p> <p>Name: AppleTalk Type: REG_BINARY Data: 00000000 a0 17 3b 2c df c6 cf 11 - 95 c8 00 80 5f 48 a1 92 ...,...</p>	

....\_H..

Value 1  
 Name: IsoTp  
 Type: REG\_BINARY  
 Data:  
 00000000 b0 cb e4 89 c1 b9 cf 11 - 95 c8 00 80 5f 48 a1 92

....\_H..

Value 2  
 Name: McsXns  
 Type: REG\_BINARY  
 Data:  
 00000000 b1 cb e4 89 c1 b9 cf 11 - 95 c8 00 80 5f 48 a1 92

....\_H..

## Services\WinSock2

Key Name: SYSTEM\CurrentControlSet\Services\WinSock2  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:01 AM

Key Name:  
 SYSTEM\CurrentControlSet\Services\WinSock2\Paramete  
 rs

Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:06 AM

Value 0  
 Name: Current\_NameSpace\_Catalog  
 Type: REG\_SZ  
 Data: NameSpace\_Catalog5

Value 1  
 Name: Current\_Protocol\_Catalog  
 Type: REG\_SZ  
 Data: Protocol\_Catalog9

Value 2  
 Name: WinSock\_Registry\_Version  
 Type: REG\_SZ  
 Data: 2.0

Key Name:  
 SYSTEM\CurrentControlSet\Services\WinSock2\Paramete  
 rs\NameSpace\_Catalog5

Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:05 AM

Value 0  
 Name: Next\_Provider\_ID  
 Type: REG\_DWORD  
 Data: 0x7d0

Value 1  
 Name: Num\_Catalog\_Entries

Type: REG\_DWORD  
 Data: 0x1

Key Name:  
 SYSTEM\CurrentControlSet\Services\WinSock2\Paramete  
 rs\NameSpace\_Catalog5\Catalog\_Entries  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:05 AM

Key Name:  
 SYSTEM\CurrentControlSet\Services\WinSock2\Paramete  
 rs\NameSpace\_Catalog5\Catalog\_Entries\000000000001  
 Class Name: <NO CLASS>  
 Last Write Time: 6/10/98 - 4:05 AM

Value 0  
 Name: DisplayString  
 Type: REG\_SZ  
 Data: TCP/IP

Value 1  
 Name: Enabled  
 Type: REG\_DWORD  
 Data: 0x1

Value 2  
 Name: LibraryPath  
 Type: REG\_SZ  
 Data: %SystemRoot%\System32\rnr20.dll

Value 3  
 Name: ProviderId  
 Type: REG\_BINARY  
 Data:

00000000 40 9d 05 22 9e 7e cf 11 - ae 5a 00 aa 00 a7 11 2b  
 @...".~..  
 .Z.....+

Value 4  
 Name: StoresServiceClassInfo  
 Type: REG\_DWORD  
 Data: 0x5e7

Value 5  
 Name: SupportedNameSpace  
 Type: REG\_DWORD  
 Data: 0xc

Value 6  
 Name: Version  
 Type: REG\_DWORD  
 Data: 0

Key Name:  
 SYSTEM\CurrentControlSet\Services\WinSock2\Paramete  
 rs\Protocol\_Catalog9  
 Class Name: <NO CLASS>

<p>Last Write Time: 6/10/98 - 4:07 AM</p> <p>Value 0          Name: Next_Catalog_Entry_ID          Type: REG_DWORD          Data: 0x3f2</p> <p>Value 1          Name: Next_Provider_ID          Type: REG_DWORD          Data: 0x1</p> <p>Value 2          Name: Num_Catalog_Entries          Type: REG_DWORD          Data: 0x5</p> <p>Key Name:          SYSTEM\CurrentControlSet\Services\WinSock2\Parameters\Protocol_Catalog9\Catalog_Entries          Class Name: &lt;NO CLASS&gt;          Last Write Time: 6/10/98 - 4:07 AM</p> <p>Key Name:          SYSTEM\CurrentControlSet\Services\WinSock2\Parameters\Protocol_Catalog9\Catalog_Entries\000000000001          Class Name: &lt;NO CLASS&gt;          Last Write Time: 6/10/98 - 4:07 AM</p> <p>Value 0          Name: PackedCatalogItem          Type: REG_BINARY          Data:          00000000 25 53 79 73 74 65 6d 52 - 6f 6f 74 25 5c 73 79 73          %SystemRoot%\System32\ms\afd.dll.          00000010 74 65 6d 33 32 5c 6d 73 - 61 66 64 2e 64 6c 6c 00          00000020 61 66 64 2e 64 6c 6c 00 - 76 00 65 00 72 00 20 00          00000030 6e 00 6f 00 64 00 65 00 - 73 00 2c 00 20 00 66 00          n.o.d.e.          00000040 6f 00 72 00 20 00 77 00 - 68 00 69 00 63 00 68 00 o.r.          .w.          h.i.c.h.          00000050 20 00 74 00 68 00 65 00 - 72 00 65 00 20 00 61 00          t.h.e.          r.e. .a.          00000060 72 00 65 00 20 00 73 00 - 65 00 70 00 61 00 72 00 r.e.          .s.          e.p.a.r.          00000070 61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00          a.t.e.          i.t.e.m.          00000080 73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 s.          t.o.</p>	.b.e... 00000090 0a 00 3b 00 20 00 70 00 - 72 00 65 00 73 00 65 00 ..; .p. r.e.s.e. 000000a0 6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00 n.t.e.d. .t.o. . 000000b0 74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00 t.h.e. . u.s.e.r. 000000c0 2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 .. . .T. h.e.s.e. 000000d0 20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00 .c.o.m. b.i.n.a. 000000e0 74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00 t.i.o.n. .n.o.d. 000000f0 65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 e.s. .a. r.e. .o. 00000100 6e 00 6c 00 66 00 02 00 - 00 00 00 00 00 00 00 00 n.l.f... ..... 00000110 00 00 00 00 08 00 00 00 - a0 1a 0f e7 8b ab cf 11 ..... 00000120 8c a3 00 80 5f 48 a1 92 - e9 03 00 00 01 00 00 00 ...._H.. ..... 00000130 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 ..... 00000140 00 00 00 00 00 00 00 00 - 00 00 00 00 02 00 00 00 ..... 00000150 02 00 00 00 10 00 00 00 - 10 00 00 00 01 00 00 00 ..... 00000160 06 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 ..... 00000170 00 00 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00 ..... M.S.A.F. 00000180 44 00 20 00 54 00 63 00 - 70 00 69 00 70 00 20 00 D. .T.C. p.i.p. . 00000190 5b 00 54 00 43 00 50 00 - 2f 00 49 00 50 00 5d 00 [.T.C.P. /.I.P.]. 000001a0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 ..... 000001b0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 .....
--	---

```

000001c0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
000001d0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
000001e0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
000001f0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000200 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000210 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000220 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000230 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000240 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000250 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000260 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000270 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000280 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
00000290 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
000002a0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
000002b0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
000002c0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
000002d0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
000002e0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....
000002f0 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....

```

.....	00000300	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....	00000310	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....	00000320	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....	00000330	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....	00000340	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....	00000350	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....	00000360	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
.....	00000370	00 00 00 00 00 00 00 00 -
.....		
<b>Key Name:</b>		
SYSTEM\CurrentControlSet\Services\WinSock2\Parameters\Protocol_Catalog9\Catalog_Entries\000000000002		
Class Name: <NO CLASS>		
Last Write Time: 6/10/98 - 4:07 AM		
Value 0		
Name: PackedCatalogItem		
Type: REG_BINARY		
Data:		
00000000 25 53 79 73 74 65 6d 52 - 6f 6f 74 25 5c 73 79 73		
%SystemRoot%\System32\msi.dll.		
00000010 74 65 6d 33 32 5c 6d 73 - 61 66 64 2e 64 6c 6c 00		
afdi.dll.		
00000020 61 66 64 2e 64 6c 6c 00 - 76 00 65 00 72 00 20 00		
afdi.dll.		
v.e.r.		
00000030 6e 00 6f 00 64 00 65 00 - 73 00 2c 00 20 00 66 00		
n.o.d.e.		
s.. f.		
00000040 6f 00 72 00 20 00 77 00 - 68 00 69 00 63 00 68 00 o.r.		
.w.		
h.i.c.h.		
00000050 20 00 74 00 68 00 65 00 - 72 00 65 00 20 00 61 00		
.t.h.e.		
r.e. a.		
00000060 72 00 65 00 20 00 73 00 - 65 00 70 00 61 00 72 00 r.e.		
.s.		
e.p.a.r.		
00000070 61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00		
a.t.e. .		

i.t.e.m.				
00000080	73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 s.		000001b0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
.t.o.			.....	
.b.e...			000001c0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
.p.			.....	
r.e.s.e.			000001d0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
000000a0	6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00		.....	
n.t.e.d.			000001e0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
.t.o. .			.....	
000000b0	74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00		.....	
t.h.e. .			000001f0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
u.s.e.r.			.....	
000000c0	2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 ...		00000200	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
.T.			.....	
h.e.s.e.			00000210	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
000000d0	20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00		.....	
c.o.m.			00000220	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
b.i.n.a.			.....	
000000e0	74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00		00000230	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
t.i.o.n.			.....	
.n.o.d.			00000240	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
000000f0	65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 e.s.		.....	
.a.			00000250	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
r.e. .o.			.....	
00000100	6e 00 6c 00 09 06 02 00 - 00 00 00 00 00 00 00 00		00000260	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
n.l....			.....	
.....			00000270	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
00000110	00 00 00 00 08 00 00 00 - a0 1a 0f e7 8b ab cf 11		.....	
.....			00000280	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
.....			.....	
00000120	8c a3 00 80 5f 48 a1 92 - ea 03 00 00 01 00 00 00		00000290	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
....._H..			.....	
.....			000002a0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
00000130	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00		.....	
.....			000002b0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
00000140	00 00 00 00 00 00 00 00 - 00 00 00 00 02 00 00 00		.....	
.....			000002c0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
00000150	02 00 00 00 10 00 00 00 - 10 00 00 00 02 00 00 00		.....	
.....			000002d0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
00000160	11 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00		.....	
.....			000002e0	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00
00000170	bb ff 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00		.....	
.....			.....	
M.S.A.F.				
00000180	44 00 20 00 54 00 63 00 - 70 00 69 00 70 00 20 00 D.			
T.c.				
p.i.p. .				
00000190	5b 00 55 00 44 00 50 00 - 2f 00 49 00 50 00 5d 00			
[U.D.P.]				
/I.P.]				
000001a0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00			
.....				

.....	00 00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	e.p.a.r.	00000070	61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00
a.t.e.	.	i.t.e.m.	00000080	73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 s.
.t.o.	.	b.e...	00000090	0a 00 3b 00 20 00 70 00 - 72 00 65 00 73 00 65 00 ..;
.p.	.	r.e.s.e.	000000a0	6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00
n.t.e.d.	.	t.o..	000000b0	74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00
t.h.e.	.	u.s.e.r.	000000c0	2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 ..
.T.	.	h.e.s.e.	000000d0	20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00
.c.o.m.	.	b.i.n.a.	000000e0	74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00
t.i.o.n.	.	n.o.d.	000000f0	65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 e.s.
.a.	.	r.e. .o.	00000100	6e 00 6c 00 09 06 02 00 - 00 00 00 00 00 00 00 00 00 00
n.l....	.	.....	00000110	00 00 00 00 0c 00 00 00 - a0 1a 0f e7 8b ab cf 11
.....	.	.....	00000120	8c a3 00 80 5f 48 a1 92 - eb 03 00 00 01 00 00 00
....._H..	.	.....	00000130	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00
.....	.	.....	00000140	00 00 00 00 00 00 00 00 - 00 00 00 00 00 02 00 00 00
.....	.	.....	00000150	02 00 00 00 10 00 00 00 - 10 00 00 00 03 00 00 00
.....	.	.....	00000160	00 00 00 00 ff 00 00 00 - 00 00 00 00 00 00 00 00 00 00
.....	.	.....	00000170	bb ff 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00
.....	.	M.S.A.F.	00000180	44 00 20 00 54 00 63 00 - 70 00 69 00 70 00 20 00 D.
.T.C.	.	p.i.p. .	00000190	5b 00 52 00 41 00 57 00 - 2f 00 49 00 50 00 5d 00
[.R.A.W.	.	/I.P.] .		
.s.	.			

000001a0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000001b0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000001c0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000001d0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000001e0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000001f0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000200	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000210	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000220	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000230	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000240	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000250	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000260	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000270	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000280	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000290	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000002a0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000002b0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000002c0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000002d0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....

.....	.....
000002e0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
000002f0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000300	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000310	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000320	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000330	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000340	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000350	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000360	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
.....	.....
00000370	00 00 00 00 00 00 00 00 00 -
.....	.....
Key Name: SYSTEM\CurrentControlSet\Services\WinSock2\Parameters\Protocol_Catalog9\Catalog_Entries\000000000004	
Class Name: <NO CLASS>	
Last Write Time: 6/10/98 - 4:07 AM	
Value 0	
Name: PackedCatalogItem	
Type: REG_BINARY	
Data:	
%SystemRoot%	00000000 25 53 79 73 74 65 6d 52 - 6f 6f 74 25 5c 73 79 73
oot%\sys	00000010 74 65 6d 33 32 5c 6d 73 - 61 66 64 2e 64 6c 6c 00
tem32\ms	afd.dll. 00000020 61 66 64 2e 64 6c 00 - 76 00 65 00 72 00 20 00
afd.dll.	v.e.r. . 00000030 6e 00 6f 00 64 00 65 00 - 73 00 2c 00 20 00 66 00
n.o.d.e.	s... .f. 00000040 6f 00 72 00 20 00 77 00 - 68 00 69 00 63 00 68 00 o.r.
.w.	h.i.c.h. 00000050 20 00 74 00 68 00 65 00 - 72 00 65 00 20 00 61 00
.t.h.e.	

r.e. . a.		00000060	72 00 65 00 20 00 73 00 - 65 00 70 00 61 00 72 00 r.e.	. [.\`.	00000190	53 00 20 00 5b 00 5c 00 - 44 00 65 00 76 00 69 00 S.	
.s.	e.p.a.r.	00000070	61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00	c.e.\`N.	000001a0	63 00 65 00 5c 00 4e 00 - 62 00 66 00 5f 00 45 00	
a.t.e. .	i.t.e.m.	00000080	73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 s.	b.f._.E.	000001b0	31 00 30 00 30 00 42 00 - 31 00 5d 00 20 00 53 00	
.t.o.	.b.e...	00000090	0a 00 3b 00 20 00 70 00 - 72 00 65 00 73 00 65 00 ...;	1.0.0.B.	1.]..S.	45 00 51 00 50 00 41 00 - 43 00 4b 00 45 00 54 00	
.p.	r.e.s.e.	000000a0	6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00	E.Q.P.A.	C.K.E.T.	000001c0	20 00 31 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00
n.t.e.d.	.t.o. .	000000b0	74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00	.1.....	000001d0	.....	
t.h.e. .	u.s.e.r.	000000c0	2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 ...	.....	000001e0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
.T.	h.e.s.e.	000000d0	20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00	.....	000001f0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
.c.o.m.	b.i.n.a.	000000e0	74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00	.....	00000200	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
t.i.o.n.	.n.o.d.	000000f0	65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 e.s.	.....	00000210	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
.a.	r.e. . o.	00000100	6e 00 6c 00 0e 00 02 00 - 00 00 00 00 00 00 00 00	.....	00000220	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
n.l.....	.....	00000110	00 00 00 00 00 00 00 00 - 30 18 5f 8d 73 c2 cf 11	.....	00000230	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
.....	0._.s...	00000120	95 c8 00 80 5f 48 a1 92 - f0 03 00 00 01 00 00 00	.....	00000240	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
...._H..	.....	00000130	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00	.....	00000250	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
.....	.....	00000140	00 00 00 00 00 00 00 00 - 00 00 00 00 02 00 00 00	.....	00000260	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
.....	.....	00000150	11 00 00 00 14 00 00 00 - 14 00 00 00 05 00 00 00	.....	00000270	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
.....	.....	00000160	ff ff ff ff 00 00 00 00 - 00 00 00 00 00 00 00 00	.....	00000280	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
.....	.....	00000170	00 fa 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00	.....	00000290	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
M.S.A.F.	.....	00000180	44 00 20 00 4e 00 65 00 - 74 00 42 00 49 00 4f 00 D.	.....	000002a0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
N.e.	t.B.I.O.			.....	000002b0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	
				.....	000002c0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00	

.....	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....	.....
000002d0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.t.h.e.	h.i.c.h. 00000050 20 00 74 00 68 00 65 00 - 72 00 65 00 20 00 61 00
.....	.....	r.e. .a.	.....
000002e0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.s.	00000060 72 00 65 00 20 00 73 00 - 65 00 70 00 61 00 72 00 r.e.
.....	.....	.....	.....
000002f0	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	a.t.e.	e.p.a.r. 00000070 61 00 74 00 65 00 20 00 - 69 00 74 00 65 00 6d 00
.....	.....	.....	.....
00000300	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.t.o.	i.t.e.m. 00000080 73 00 20 00 74 00 6f 00 - 20 00 62 00 65 00 0d 00 s.
.....	.....	.....	.....
00000310	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.p.	b.e... 00000090 0a 00 3b 00 20 00 70 00 - 72 00 65 00 73 00 65 00 ..;
.....	.....	.....	.....
00000320	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	n.t.e.d.	r.e.s.e. 000000a0 6e 00 74 00 65 00 64 00 - 20 00 74 00 6f 00 20 00
.....	.....	t.h.e.	.....
00000330	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....	t.o.. 000000b0 74 00 68 00 65 00 20 00 - 75 00 73 00 65 00 72 00
.....	.....	.....	.....
00000340	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.T.	u.s.e.r. 000000c0 2e 00 20 00 20 00 54 00 - 68 00 65 00 73 00 65 00 ...
.....	.....	.....	.....
00000350	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.c.o.m.	h.e.s.e. 000000d0 20 00 63 00 6f 00 6d 00 - 62 00 69 00 6e 00 61 00
.....	.....	t.i.o.n.	.....
00000360	00 00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	.....	b.i.n.a. 000000e0 74 00 69 00 6f 00 6e 00 - 20 00 6e 00 6f 00 64 00
.....	.....	.....	.....
00000370	00 00 00 00 00 00 00 00 00 -	.a.	n.o.d.
.....	.....	.....	65 00 73 00 20 00 61 00 - 72 00 65 00 20 00 6f 00 e.s.
.....	.....	.....	.....
Key Name:	.....	n.l....	r.e. .o. 00000100 6e 00 6c 00 09 02 02 00 - 00 00 00 00 00 00 00 00 00 00 00 00 00
SYSTEM\CurrentControlSet\Services\WinSock2\Paramete	.....	.....	.....
rs\Protocol_Catalog9\Catalog_Entries\000000000005	.....	.....	.....
Class Name: <NO CLASS>	.....	.....	00000110 00 00 00 00 00 00 00 - 30 18 5f 8d 73 c2 cf 11
Last Write Time: 6/10/98 - 4:07 AM	.....	.....	.....
Value 0	.....	.....	0_.s... 00000120 95 c8 00 80 5f 48 a1 92 - f1 03 00 00 01 00 00 00
Name: PackedCatalogItem	.....	.....	....._H.. 00000130 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00 00 00
Type: REG_BINARY	.....	.....	.....
Data:	.....	.....	.....
00000000 25 53 79 73 74 65 6d 52 - 6f 6f 74 25 5c 73 79 73	.....	.....	00000140 00 00 00 00 00 00 00 - 00 00 00 00 00 00 02 00 00 00
%SystemRoot%\sys	.....	.....	.....
00000010 74 65 6d 33 32 5c 6d 73 - 61 66 64 2e 64 6c 60	.....	.....	00000150 11 00 00 00 14 00 00 00 - 14 00 00 00 02 00 00 00
tem32\ms	.....	.....	.....
afd.dll.	.....	.....	.....
00000020 61 66 64 2e 64 6c 60 - 76 00 65 00 72 00 20 00	.....	.....	00000160 ff ff ff 00 00 00 00 - 00 00 00 00 00 00 00 00 00 00
afdd.dll.	.....	.....	.....
v.e.r. .	.....	.....	.....
00000030 6e 00 6f 00 64 00 65 00 - 73 00 2c 00 20 00 66 00	.....	.....	00000170 00 fa 00 00 00 00 00 00 - 4d 00 53 00 41 00 46 00
n.o.d.e.	.....	.....	.....
s... .f.	.....	.....	M.S.A.F.
00000040 6f 00 72 00 20 00 77 00 - 68 00 69 00 63 00 68 00 o.r.	.....	.....	.....
w.	.....	.....	.....

N.e.	00000180	44 00 20 00 4e 00 65 00 - 74 00 42 00 49 00 4f 00 D.
t.B.I.O.	00000190	53 00 20 00 5b 00 5c 00 - 44 00 65 00 76 00 69 00 S.
.[.] .	D.e.v.i.	000001a0 63 00 65 00 5c 00 4e 00 - 62 00 66 00 5f 00 45 00
c.e.\.N.	b.f._.E.	000001b0 31 00 30 00 30 00 42 00 - 31 00 5d 00 20 00 44 00
1.0.0.B.	A.T.A.G.	1.] . D. 000001c0 41 00 54 00 41 00 47 00 - 52 00 41 00 4d 00 20 00
R.A.M. .	000001d0	31 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
1.....	000001e0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	000001f0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000200	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000210	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000220	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000230	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000240	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000250	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000260	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000270	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000280	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000290	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	000002a0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	000002b0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00

.....	000002c0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	000002d0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	000002e0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	000002f0	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000300	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000310	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000320	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000330	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000340	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000350	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000360	00 00 00 00 00 00 00 00 - 00 00 00 00 00 00 00 00
.....	00000370	00 00 00 00 00 00 00 00 -

## NT Client Configuration Information

Microsoft Diagnostics Report For \\CLIENT1

---

### OS Version Report

---

Microsoft (R) Windows NT (TM) Server  
 Version 4.0 (Build 1381: Service Pack 3) x86 Multiprocessor Free  
 Registered Owner: Unisys, Unisys  
 Product Number: 31797-OEM-0026695-85788

---

### System Report

---

System: AT/AT COMPATIBLE  
 Hardware Abstraction Layer: MPS 1.4 - APIC platform

BIOS Date: 10/13/97  
BIOS Version: PhoenixBIOS 4.0 Release 5.10.7

Processor list:

0: x86 Family 6 Model 3 Stepping 4 GenuineIntel ~299 Mhz  
1: x86 Family 6 Model 3 Stepping 4 GenuineIntel ~299 Mhz

Video Display Report

BIOS Date: 11/16/95  
BIOS Version: CL-GD5440 VGA BIOS Version 1.06

Adapter:

Setting: 800 x 600 x 256  
60 Hz  
Type: cirrus compatible display adapter  
String: Cirrus Logic Compatible

Memory: 2 MB

Chip Type: CL 5430

DAC Type: Integrated RAMDAC

Driver:

Vendor: Microsoft Corporation  
File(s): cirrus.sys, vga.dll, cirrus.dll, vga256.dll, vga64K.dll  
Version: 4.00, 4.0.0

Drives Report

C:\ (Local - NTFS) Total: 0KB, Free: 0KB  
Serial Number: E80B - 4E03  
Bytes per cluster: 512  
Sectors per cluster: 1  
Filename length: 255

Memory Report

Handles: 1,120  
Threads: 109  
Processes: 16

Physical Memory (K)  
Total: 261,552  
Available: 224,332  
File Cache: 10,064

Kernel Memory (K)  
Total: 18,668  
Paged: 7,508  
Nonpaged: 11,160

Commit Charge (K)  
Total: 27,768  
Limit: 505,824  
Peak: 310,732

Pagefile Space (K)  
Total: 262,144  
Total in use: 5,300

Peak: 106,656

C:\pagefile.sys  
Total: 262,144  
Total in use: 5,300  
Peak: 106,656

Services Report

Alerter	C:\WINNT\System32\services.exe	Stopped	(Manual)
Computer Browser	C:\WINNT\System32\services.exe	Running	(Automatic)
ClipBook Server	C:\WINNT\system32\clipsrv.exe	Stopped	(Manual)
DHCP Client (TDI)	C:\WINNT\System32\services.exe	Stopped	(Disabled)
3Com dRMON SmartAgent PC Software	C:\WINNT\System32\drmon\smartagt\smartagt.exe	Stopped	(Manual)
EventLog (Event log)	C:\WINNT\system32\services.exe	Running	(Automatic)
Adaptec Failover Backup Monitor	C:\WINNT\System32\forbmon.exe	Stopped	(Manual)

Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Service Dependencies:  
LanmanWorkstation

Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Service Dependencies:  
LanmanWorkstation  
LanmanServer  
LmHosts

Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Own Process  
Service Dependencies:  
NetDDE

Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process  
Service Dependencies:  
Tcpip  
Afd  
NetBT

Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Own Process  
Service Dependencies:  
DTA

Service Account Name: LocalSystem  
Error Severity: Normal  
Service Flags: Shared Process

Service Flags: Own Process Server C:\WINNT\System32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Group Dependencies: TDI	Running	(Automatic)	Service Flags: Shared Process OracleClientCache80 C:\ORANT\BIN\ONRSD80.EXE Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process Plug and Play (PlugPlay) C:\WINNT\system32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Protected Storage C:\WINNT\System32\pstores.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process, Interactive Service Dependencies: RpcSs	Stopped	(Manual)
Workstation (NetworkProvider) C:\WINNT\System32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Group Dependencies: TDI	Running	(Automatic)	Remote Command Server C:\WINNT\System32\rcmdsvc.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process Service Dependencies: LanmanServer	Running	(Automatic)
License Logging Service C:\WINNT\System32\llssrv.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process	Stopped	(Manual)	Directory Replicator C:\WINNT\System32\lmrepl.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process Service Dependencies: LanmanWorkstation LanmanServer	Stopped	(Manual)
TCP/IP NetBIOS Helper C:\WINNT\System32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Group Dependencies: NetworkProvider	Running	(Automatic)	Remote Procedure Call (RPC) Locator C:\WINNT\System32\LOCATOR.EXE Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process Service Dependencies: LanmanWorkstation Rdr	Stopped	(Manual)
Messenger C:\WINNT\System32\services.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Service Dependencies: LanmanWorkstation NetBIos	Stopped	(Manual)	Remote Procedure Call (RPC) Service C:\WINNT\system32\RpcSs.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process	Running	(Automatic)
Network DDE (NetDDEGroup) C:\WINNT\system32\netdde.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Service Dependencies: NetDDEDSDM	Stopped	(Manual)	Schedule C:\WINNT\System32\AtSvc.Exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process	Stopped	(Manual)
Network DDE DSDM C:\WINNT\system32\netdde.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process	Stopped	(Manual)	Spooler (SpoolerGroup) C:\WINNT\system32\spoolss.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Own Process, Interactive	Stopped	(Manual)
Net Logon (RemoteValidation) C:\WINNT\System32\lsass.exe Service Account Name: LocalSystem Error Severity: Normal Service Flags: Shared Process Service Dependencies: LanmanWorkstation LmHosts	Stopped	(Manual)	Telephony Service C:\WINNT\system32\tapisrv.exe Service Account Name: LocalSystem	Stopped	(Manual)
NT LM Security Support Provider C:\WINNT\System32\SERVICES.EXE Service Account Name: LocalSystem Error Severity: Normal	Running	(Manual)			

Error Severity: Normal				
Service Flags: Own Process				
TUXEDO IPC Helper	Stopped	(Automatic)	atapi (SCSI miniport)	Stopped
C:\TUXEDO\bin\tuxipc.exe			Error Severity: Normal	(Disabled)
Service Account Name: LocalSystem			Service Flags: Kernel Driver, Shared Process	
Error Severity: Normal			Atdisk (Primary disk)	Stopped
Service Flags: Own Process			Error Severity: Ignore	(Disabled)
TListen (Port: 3050)	Stopped	(Manual)	Service Flags: Kernel Driver, Shared Process	
C:\TUXEDO\bin\slisten.exe			ati (Video)	Stopped
Service Account Name: LocalSystem			Error Severity: Ignore	(Disabled)
Error Severity: Normal			Service Flags: Kernel Driver, Shared Process	
Service Flags: Own Process			Beep (Base)	Running
UPS	Stopped	(Manual)	Error Severity: Normal	(System)
C:\WINNT\System32\ups.exe			Service Flags: Kernel Driver, Shared Process	
Service Account Name: LocalSystem			BusLogic (SCSI miniport)	Stopped
Error Severity: Normal			Error Severity: Normal	(Disabled)
Service Flags: Own Process			Service Flags: Kernel Driver, Shared Process	
World Wide Web Publishing Service	Stopped	(Manual)	Busmouse (Pointer Port)	Stopped
C:\WINNT\System32\inetsrv\inetinfo.exe			Error Severity: Ignore	(Disabled)
Service Account Name: LocalSystem			Service Flags: Kernel Driver, Shared Process	
Error Severity: Ignore			Cdaudio (Filter)	Stopped
Service Flags: Shared Process			Error Severity: Ignore	(System)
Service Dependencies:			Service Flags: Kernel Driver, Shared Process	
RPCSS			Cdfs (File system)	Running
NTLMSSP			Error Severity: Normal	(Disabled)
Drivers Report			Service Flags: File System Driver, Shared Process	
-----			Group Dependencies:	
Abiosdsk (Primary disk)	Stopped	(Disabled)	SCSI CDROM Class	
Error Severity: Ignore			Cdrom (SCSI CDROM Class)	Running
Service Flags: Kernel Driver, Shared Process			Error Severity: Ignore	(System)
AFD Networking Support Environment (TDI)	Running	(Automatic)	Service Flags: Kernel Driver, Shared Process	
C:\WINNT\System32\drivers\afd.sys			Group Dependencies:	
Error Severity: Normal			SCSI miniport	
Service Flags: Kernel Driver, Shared Process			Changer (Filter)	Stopped
Aha154x (SCSI miniport)	Stopped	(Disabled)	Error Severity: Ignore	(System)
Error Severity: Normal			Service Flags: Kernel Driver, Shared Process	
Service Flags: Kernel Driver, Shared Process			cirrus (Video)	Running
Aha174x (SCSI miniport)	Stopped	(Disabled)	Error Severity: Normal	(System)
Error Severity: Normal			Service Flags: Kernel Driver, Shared Process	
Service Flags: Kernel Driver, Shared Process			Cpqarray (SCSI miniport)	Stopped
aic78xx (SCSI miniport)	Running	(Boot)	Error Severity: Normal	(Disabled)
C:\WINNT\System32\DRIVERS\aic78xx.sys			Service Flags: Kernel Driver, Shared Process	
Error Severity: Normal			cpqfws2e (SCSI miniport)	Stopped
Service Flags: Kernel Driver, Shared Process			Error Severity: Normal	(Disabled)
Always (SCSI miniport)	Stopped	(Disabled)	Service Flags: Kernel Driver, Shared Process	
Error Severity: Normal			dac960nt (SCSI miniport)	Stopped
Service Flags: Kernel Driver, Shared Process			Error Severity: Normal	(Disabled)
ami9nt (SCSI miniport)	Stopped	(Disabled)	Service Flags: Kernel Driver, Shared Process	
Error Severity: Normal			dce376nt (SCSI miniport)	Stopped
Service Flags: Kernel Driver, Shared Process			Error Severity: Normal	(Disabled)
amsint (SCSI miniport)	Stopped	(Disabled)	Service Flags: Kernel Driver, Shared Process	
Error Severity: Normal			Dellldsa (SCSI miniport)	Stopped
Service Flags: Kernel Driver, Shared Process			Error Severity: Normal	(Disabled)
Arrow (SCSI miniport)	Stopped	(Disabled)	Service Flags: Kernel Driver, Shared Process	
Error Severity: Normal			Dell_DGX (Video)	Stopped
Service Flags: Kernel Driver, Shared Process			Error Severity: Ignore	(Disabled)

SCSI miniport			
Diskperf (Filter)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
DptScsi (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
DTA (TDI)	Stopped	(Manual)	
C:\WINNT\System32\drivers\dtadrv.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
dtc329x (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
3Com 3C90x Adapter Driver (NDIS)	Running	(Automatic)	
C:\WINNT\System32\drivers\el90x.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Adaptec EMPCI Adapter Driver (NDIS)	Running	(Automatic)	
C:\WINNT\System32\drivers\EMPCI.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
et4000 (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Fastfat (Boot file system)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: File System Driver, Shared Process			
Fd16_700 (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Fd7000ex (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Fd8xx (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Floppy (Primary disk)	Running	(System)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Ftdisk (Filter)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
i8042 Keyboard and PS/2 Mouse Port Driver (Keyboard Port)	Running		
(System)			
System32\DRIVERS\i8042prt.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Import (Pointer Port)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Jazzg300 (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Jazzg364 (Video)	Stopped	(Disabled)	
Error Severity: Ignore			

Service Flags: Kernel Driver, Shared Process			
Jzvxl484 (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Keyboard Class Driver (Keyboard Class)	Running	(System)	
System32\DRIVERS\kbdclass.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
KSecDD (Base)	Running	(System)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
mga (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
mga_mil (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
mitsumi (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
mkecr5xx (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Modem (Extended base)	Stopped	(Manual)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Mouse Class Driver (Pointer Class)	Running	(System)	
System32\DRIVERS\mouclass.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Msfs (File system)	Running	(System)	
Error Severity: Normal			
Service Flags: File System Driver, Shared Process			
Mup (Network)	Running	(Manual)	
C:\WINNT\System32\drivers\mup.sys			
Error Severity: Normal			
Service Flags: File System Driver, Shared Process			
NetBEUI Protocol (PNP_TDI)	Running	(Automatic)	
C:\WINNT\System32\drivers\nbf.sys			
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Ncr53c9x (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
ncr77c22 (Video)	Stopped	(Disabled)	
Error Severity: Ignore			
Service Flags: Kernel Driver, Shared Process			
Ncrc700 (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Ncrc710 (SCSI miniport)	Stopped	(Disabled)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
Microsoft NDIS System Driver (NDIS)	Running	(System)	
Error Severity: Normal			
Service Flags: Kernel Driver, Shared Process			
NetBIOS Interface (NetBIOSGroup)	Stopped	(Manual)	
C:\WINNT\System32\drivers\netbios.sys			
Error Severity: Normal			

Service Flags: File System Driver, Shared Process  
 Group Dependencies:  
     TDI  
 WINS Client (TCP/IP) (PNP\_TDI)                         Stopped    (Automatic)  
     C:\WINNT\System32\drivers\netbt.sys  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
     Tcpip  
 NetDetect   Stopped    (Manual)  
     C:\WINNT\system32\drivers\netdTECT.sys  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Npfs (File system)                                       Running    (System)  
     Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Ntfs (File system)                                       Running    (Disabled)  
     Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 Null (Base)   Running    (System)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Oliscsi (SCSI miniport)                                Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Parallel (Extended base)                               Running    (Automatic)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
     Parport  
 Group Dependencies:  
     Parallel arbitrator  
 Parport (Parallel arbitrator)                         Running    (Automatic)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 ParVdm (Extended base)                                 Running    (Automatic)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Service Dependencies:  
     Parport  
 Group Dependencies:  
     Parallel arbitrator  
 PCIDump (PCI Configuration)                         Stopped    (System)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Pcmcia (System Bus Extender)                         Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 PnP ISA Enabler Driver (Base)                        Stopped    (System)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 psidisp (Video)                                        Stopped    (Disabled)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Q110wnt (SCSI miniport)                                Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 qv (Video)    Stopped    (Disabled)  
     Error Severity: Ignore

Service Flags: Kernel Driver, Shared Process  
 Rdr (Network)    Running    (Manual)  
     C:\WINNT\System32\drivers\rdr.sys  
 Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 s3 (Video)    Stopped    (Disabled)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Scsiprnt (Extended base)                                Stopped    (Automatic)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
     SCSI miniport  
 Scsiscan (SCSI Class)                                 Stopped    (System)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
     SCSI miniport  
 Serial (Extended base)                                 Running    (Automatic)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Sermouse (Pointer Port)                                Stopped    (Disabled)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Sfloppy (Primary disk)                                 Stopped    (System)  
     Error Severity: Ignore  
 Service Flags: Kernel Driver, Shared Process  
 Group Dependencies:  
     SCSI miniport  
 Simbad (Filter)   Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 slcd32 (SCSI miniport)                                Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Sparrow (SCSI miniport)                                Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Spock (SCSI miniport)                                 Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 Srv (Network)    Running    (Manual)  
     C:\WINNT\System32\drivers\srv.sys  
     Error Severity: Normal  
 Service Flags: File System Driver, Shared Process  
 sync810 (SCSI miniport)                                Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 T128 (SCSI miniport)                                 Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 T13B (SCSI miniport)                                 Stopped    (Disabled)  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 TCP/IP Service (PNP\_TDI)                                Running    (Automatic)  
     C:\WINNT\System32\drivers\tcpip.sys  
     Error Severity: Normal  
 Service Flags: Kernel Driver, Shared Process  
 tga (Video)    Stopped    (Disabled)

```

Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
tmv1 (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Ultra124 (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Ultra14f (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
Ultra24f (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
v7vram (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
VgaSave (Video Save) Stopped (System)
C:\WINNT\System32\drivers\vga.sys
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Vgastart (Video Init) Stopped (System)
C:\WINNT\System32\drivers\vga.sys
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
wd33c93 (SCSI miniport) Stopped (Disabled)
Error Severity: Normal
Service Flags: Kernel Driver, Shared Process
wd90c24a (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
wdvga (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
weitekp9 (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process
Xga (Video) Stopped (Disabled)
Error Severity: Ignore
Service Flags: Kernel Driver, Shared Process

```

#### IRQ and Port Report

Devices	Vector	Level	Affinity
MPS 1.4 - APIC platform	8	8	0x00000003
MPS 1.4 - APIC platform	0	0	0x00000003
MPS 1.4 - APIC platform	1	1	0x00000003
MPS 1.4 - APIC platform	2	2	0x00000003
MPS 1.4 - APIC platform	3	3	0x00000003
MPS 1.4 - APIC platform	4	4	0x00000003
MPS 1.4 - APIC platform	5	5	0x00000003
MPS 1.4 - APIC platform	6	6	0x00000003
MPS 1.4 - APIC platform	7	7	0x00000003
MPS 1.4 - APIC platform	8	8	0x00000003
MPS 1.4 - APIC platform	9	9	0x00000003
MPS 1.4 - APIC platform	10	10	0x00000003

Devices	Physical Address	Length
MPS 1.4 - APIC platform	11	11 0x00000003
MPS 1.4 - APIC platform	12	12 0x00000003
MPS 1.4 - APIC platform	13	13 0x00000003
MPS 1.4 - APIC platform	14	14 0x00000003
MPS 1.4 - APIC platform	15	15 0x00000003
MPS 1.4 - APIC platform	16	16 0x00000003
MPS 1.4 - APIC platform	17	17 0x00000003
MPS 1.4 - APIC platform	18	18 0x00000003
MPS 1.4 - APIC platform	19	19 0x00000003
MPS 1.4 - APIC platform	20	20 0x00000003
MPS 1.4 - APIC platform	21	21 0x00000003
MPS 1.4 - APIC platform	22	22 0x00000003
MPS 1.4 - APIC platform	23	23 0x00000003
MPS 1.4 - APIC platform	24	24 0x00000003
MPS 1.4 - APIC platform	25	25 0x00000003
MPS 1.4 - APIC platform	26	26 0x00000003
MPS 1.4 - APIC platform	27	27 0x00000003
MPS 1.4 - APIC platform	28	28 0x00000003
MPS 1.4 - APIC platform	29	29 0x00000003
MPS 1.4 - APIC platform	30	30 0x00000003
MPS 1.4 - APIC platform	31	31 0x00000003
MPS 1.4 - APIC platform	32	32 0x00000003
MPS 1.4 - APIC platform	33	33 0x00000003
MPS 1.4 - APIC platform	34	34 0x00000003
MPS 1.4 - APIC platform	35	35 0x00000003
MPS 1.4 - APIC platform	36	36 0x00000003
MPS 1.4 - APIC platform	37	37 0x00000003
MPS 1.4 - APIC platform	38	38 0x00000003
MPS 1.4 - APIC platform	39	39 0x00000003
MPS 1.4 - APIC platform	40	40 0x00000003
MPS 1.4 - APIC platform	41	41 0x00000003
MPS 1.4 - APIC platform	42	42 0x00000003
MPS 1.4 - APIC platform	43	43 0x00000003
MPS 1.4 - APIC platform	44	44 0x00000003
MPS 1.4 - APIC platform	45	45 0x00000003
MPS 1.4 - APIC platform	46	46 0x00000003
MPS 1.4 - APIC platform	47	47 0x00000003
MPS 1.4 - APIC platform	61	61 0x00000003
MPS 1.4 - APIC platform	65	65 0x00000003
MPS 1.4 - APIC platform	80	80 0x00000003
MPS 1.4 - APIC platform	193	193 0x00000003
MPS 1.4 - APIC platform	225	225 0x00000003
MPS 1.4 - APIC platform	253	253 0x00000003
MPS 1.4 - APIC platform	254	254 0x00000003
MPS 1.4 - APIC platform	255	255 0x00000003
i8042prt	1	1 0xffffffff
i8042prt	12	12 0xffffffff
Serial	4	4 0x00000000
Serial	3	3 0x00000000
El90x	10	10 0x00000000
El90x	11	11 0x00000000
EMPCI	5	5 0x00000000
EMPCI	5	5 0x00000000
EMPCI	5	5 0x00000201
EMPCI	5	5 0x00000000
Floppy	6	6 0x00000000
aic78xx	9	9 0x00000000

```

-----
MPS 1.4 - APIC platform      0x00000000 0x0000000010
MPS 1.4 - APIC platform      0x00000020 0x0000000002
MPS 1.4 - APIC platform      0x00000040 0x0000000004
MPS 1.4 - APIC platform      0x00000048 0x0000000004
MPS 1.4 - APIC platform      0x00000061 0x0000000001
MPS 1.4 - APIC platform      0x00000070 0x0000000002
MPS 1.4 - APIC platform      0x00000080 0x0000000010
MPS 1.4 - APIC platform      0x00000092 0x0000000001
MPS 1.4 - APIC platform      0x000000a0 0x0000000002
MPS 1.4 - APIC platform      0x000000c0 0x0000000010
MPS 1.4 - APIC platform      0x000000d0 0x0000000010
MPS 1.4 - APIC platform      0x000000f0 0x0000000010
MPS 1.4 - APIC platform      0x00000400 0x0000000010
MPS 1.4 - APIC platform      0x00000461 0x0000000002
MPS 1.4 - APIC platform      0x00000464 0x0000000002
MPS 1.4 - APIC platform      0x00000480 0x0000000010
MPS 1.4 - APIC platform      0x000004c2 0x000000000e
MPS 1.4 - APIC platform      0x000004d0 0x0000000002
MPS 1.4 - APIC platform      0x000004d4 0x000000002c
MPS 1.4 - APIC platform      0x00000c84 0x0000000001
i8042prt                    0x00000060 0x0000000001
i8042prt                    0x00000064 0x0000000001
Parport                      0x00000378 0x0000000003
Serial                       0x000003f8 0x0000000007
Serial                       0x000002f8 0x0000000007
El90x                        0x0000fc40 0x0000000040
El90x                        0x0000fcc0 0x0000000040
EMPCI                         0x0000ec00 0x0000000080
EMPCI                         0x0000e880 0x0000000080
EMPCI                         0x0000e800 0x0000000080
EMPCI                         0x0000e480 0x0000000080
Floppy                        0x000003f0 0x0000000006
Floppy                        0x000003f7 0x0000000001
aic78xx                      0x0000f800 0x0000000100
cirrus                        0x000003b0 0x000000000c
cirrus                        0x000003c0 0x0000000020

```

#### DMA and Memory Report

```

-----
Devices          Channel  Port
-----
Floppy          2        0
-----
Devices          Physical Address Length
-----
MPS 1.4 - APIC platform 0xfec00000 0x00000400
MPS 1.4 - APIC platform 0xfe000000 0x00000400
aic78xx          0xfedff000 0x00001000
cirrus           0x000a0000 0x00020000
cirrus           0xfd000000 0x01000000

```

#### Environment Report

```

System Environment Variables
APPDIR=c:\tuxedo\runtime
ComSpec=C:\WINNT\system32\cmd.exe
LIBPATH=c:\tuxedo\lib
NUMBER_OF_PROCESSORS=2
OS=Windows_NT
Os2LibPath=C:\WINNT\system32\os2\dll;

Path=C:\WINNT\system32;C:\WINNT;C:\MSSQL7\BINN;C:\TUXEDO\bin;C:\ORANT\BIN
PROCESSOR_ARCHITECTURE=x86
PROCESSOR_IDENTIFIER=x86 Family 6 Model 3 Stepping 4, GenuineIntel
PROCESSOR_LEVEL=6
PROCESSOR_REVISION=0304
TMCONTEXTS=1
TUXCONFIG=c:\tuxedo\runtime\tuxconfig
TUXDIR=c:\tuxedo
windir=C:\WINNT

```

#### Environment Variables for Current User

```

TEMP=C:\TEMP
TMP=C:\TEMP

```

#### Network Report

```

-----
Your Access Level: Admin & Local
Workgroup or Domain: WORKGROUP
Network Version: 4.0
LanRoot: WORKGROUP
Logged On Users: 1
Current User (1): Administrator
  Logon Domain: CLIENT1
  Logon Server: CLIENT1

```

```

Transport: Nbf_El90x1, 00-10-4B-9D-F5-A7, VC's: 1, Wan: Wan
Transport: Nbf_El90x2, 00-10-4B-9D-F5-B5, VC's: 0, Wan: Wan
Transport: Nbf_EMPCI3, 00-00-92-A7-76-CC, VC's: 1, Wan: Wan
Transport: Nbf_EMPCI4, 00-00-92-A7-76-CD, VC's: 1, Wan: Wan
Transport: Nbf_EMPCI5, 00-00-92-A7-76-CE, VC's: 1, Wan: Wan
Transport: Nbf_EMPCI6, 00-00-92-A7-76-CF, VC's: 0, Wan: Wan

```

```

Character Wait: 3,600
Collection Time: 250
Maximum Collection Count: 16
Keep Connection: 600
Maximum Commands: 5
Session Time Out: 45
Character Buffer Size: 512
Maximum Threads: 17
Lock Quota: 6,144
Lock Increment: 10
Maximum Locks: 500
Pipe Increment: 10
Maximum Pipes: 500

```

Cache Time Out: 40  
 Dormant File Limit: 45  
 Read Ahead Throughput: 4,294,967,295  
 Mailslot Buffers: 3  
 Server Announce Buffers: 20  
 Illegal Datagrams: 5  
 Datagram Reset Frequency: 60  
 Log Election Packets: False  
 Use Opportunistic Locking: True  
 Use Unlock Behind: True  
 Use Close Behind: True  
 Buffer Pipes: True  
 Use Lock, Read, Unlock: True  
 Use NT Caching: True  
 Use Raw Read: True  
 Use Raw Write: True  
 Use Write Raw Data: True  
 Use Encryption: True  
 Buffer Deny Write Files: True  
 Buffer Read Only Files: True  
 Force Core Creation: True  
 512 Byte Max Transfer: False  
 Bytes Received: 767,196  
 SMB's Received: 8,247  
 Paged Read Bytes Requested: 0  
 Non Paged Read Bytes Requested: 0  
 Cache Read Bytes Requested: 0  
 Network Read Bytes Requested: 0  
 Bytes Transmitted: 899,039  
 SMB's Transmitted: 8,247  
 Paged Read Bytes Requested: 0  
 Non Paged Read Bytes Requested: 0  
 Cache Read Bytes Requested: 0  
 Network Read Bytes Requested: 0  
 Initially Failed Operations: 0  
 Failed Completion Operations: 0  
 Read Operations: 0  
 Random Read Operations: 0  
 Read SMB's: 0  
 Large Read SMB's: 0  
 Small Read SMB's: 0  
 Write Operations: 0  
 Random Write Operations: 0  
 Write SMB's: 0  
 Large Write SMB's: 0  
 Small Write SMB's: 0  
 Raw Reads Denied: 0  
 Raw Writes Denied: 0  
 Network Errors: 0  
 Sessions: 1,372  
 Failed Sessions: 0  
 Reconnects: 0  
 Core Connects: 0  
 LM 2.0 Connects: 0  
 LM 2.x Connects: 0  
 Windows NT Connects: 1,372  
 Server Disconnects: 0  
 Hung Sessions: 0  
 Use Count: 2,744

Failed Use Count: 0  
 Current Commands: 0  
 Server File Opens: 89  
 Server Device Opens: 0  
 Server Jobs Queued: 0  
 Server Session Opens: 1  
 Server Sessions Timed Out: 2  
 Server Sessions Errorred Out: 2  
 Server Password Errors: 0  
 Server Permission Errors: 0  
 Server System Errors: 0  
 Server Bytes Sent: 29,275,959  
 Server Bytes Received: 3,378,946  
 Server Average Response Time: 0  
 Server Request Buffers Needed: 0  
 Server Big Buffers Needed: 0

## Internet Information Server Registry Parameters

Key Name:	SYSTEM\CurrentControlSet\Services\InetInfo						
Class Name:	<NO CLASS>						
Last Write Time:	5/29/98 - 1:57 AM						
Value 0	<table border="0"> <tbody> <tr> <td>Name:</td> <td>BandwidthLevel</td> </tr> <tr> <td>Type:</td> <td>REG_DWORD</td> </tr> <tr> <td>Data:</td> <td>0xffffffff</td> </tr> </tbody> </table>	Name:	BandwidthLevel	Type:	REG_DWORD	Data:	0xffffffff
Name:	BandwidthLevel						
Type:	REG_DWORD						
Data:	0xffffffff						
Value 1	<table border="0"> <tbody> <tr> <td>Name:</td> <td>DisableMemoryCache</td> </tr> <tr> <td>Type:</td> <td>REG_DWORD</td> </tr> <tr> <td>Data:</td> <td>0x1</td> </tr> </tbody> </table>	Name:	DisableMemoryCache	Type:	REG_DWORD	Data:	0x1
Name:	DisableMemoryCache						
Type:	REG_DWORD						
Data:	0x1						
Value 2	<table border="0"> <tbody> <tr> <td>Name:</td> <td>ListenBackLog</td> </tr> <tr> <td>Type:</td> <td>REG_DWORD</td> </tr> <tr> <td>Data:</td> <td>0x19</td> </tr> </tbody> </table>	Name:	ListenBackLog	Type:	REG_DWORD	Data:	0x19
Name:	ListenBackLog						
Type:	REG_DWORD						
Data:	0x19						
Value 3	<table border="0"> <tbody> <tr> <td>Name:</td> <td>MemoryCacheSize</td> </tr> <tr> <td>Type:</td> <td>REG_DWORD</td> </tr> <tr> <td>Data:</td> <td>0</td> </tr> </tbody> </table>	Name:	MemoryCacheSize	Type:	REG_DWORD	Data:	0
Name:	MemoryCacheSize						
Type:	REG_DWORD						
Data:	0						
Value 4	<table border="0"> <tbody> <tr> <td>Name:</td> <td>ObjectCacheTTL</td> </tr> <tr> <td>Type:</td> <td>REG_DWORD</td> </tr> <tr> <td>Data:</td> <td>0xffffffff</td> </tr> </tbody> </table>	Name:	ObjectCacheTTL	Type:	REG_DWORD	Data:	0xffffffff
Name:	ObjectCacheTTL						
Type:	REG_DWORD						
Data:	0xffffffff						
Value 5	<table border="0"> <tbody> <tr> <td>Name:</td> <td>PoolThreadLimit</td> </tr> <tr> <td>Type:</td> <td>REG_DWORD</td> </tr> <tr> <td>Data:</td> <td>0xaa</td> </tr> </tbody> </table>	Name:	PoolThreadLimit	Type:	REG_DWORD	Data:	0xaa
Name:	PoolThreadLimit						
Type:	REG_DWORD						
Data:	0xaa						

Key Name: SYSTEM\CurrentControlSet\Services\InetInfo\Parameters\Filter	Value 7 Name: application/oda, oda,, 5 Type: REG_SZ Data:
Class Name: <NO CLASS>	
Last Write Time: 5/29/98 - 1:57 AM	
Value 0 Name: FilterType Type: REG_DWORD Data: 0	Value 8 Name: application/pdf, pdf,, 5 Type: REG_SZ Data:
Value 1 Name: NumDenySites Type: REG_DWORD Data: 0	Value 9 Name: application/postscript, ai,, 5 Type: REG_SZ Data:
Value 2 Name: NumGrantSites Type: REG_DWORD Data: 0	Value 10 Name: application/postscript, eps,, 5 Type: REG_SZ Data:
Key Name: SYSTEM\CurrentControlSet\Services\InetInfo\Parameters\MimeMap	Value 11 Name: application/postscript, ps,, 5 Type: REG_SZ Data:
Class Name: <NO CLASS>	
Last Write Time: 5/29/98 - 1:57 AM	
Value 0 Name: application/envoy, evy,, 5 Type: REG_SZ Data:	Value 12 Name: application/rtf, rtf,, 5 Type: REG_SZ Data:
Value 1 Name: application/mac-binhex40, hqx,, 4 Type: REG_SZ Data:	Value 13 Name: application/winhelp, hlp,, 5 Type: REG_SZ Data:
Value 2 Name: application/msword, doc,, 5 Type: REG_SZ Data:	Value 14 Name: application/x-bcpio, bcpio,, 5 Type: REG_SZ Data:
Value 3 Name: application/msword, dot,, 5 Type: REG_SZ Data:	Value 15 Name: application/x-cpio, cpio,, 5 Type: REG_SZ Data:
Value 4 Name: application/octet-stream, *, , 5 Type: REG_SZ Data:	Value 16 Name: application/x-csh, csh,, 5 Type: REG_SZ Data:
Value 5 Name: application/octet-stream, bin,, 5 Type: REG_SZ Data:	Value 17 Name: application/x-director, dcr,, 5 Type: REG_SZ Data:
Value 6 Name: application/octet-stream, exe,, 5 Type: REG_SZ Data:	Value 18 Name: application/x-director, dir,, 5 Type: REG_SZ Data:

Value 19	Name: application/x-director,dxr,,5 Type: REG_SZ Data:	Data:  Value 31 Name: application/x-msexcel,xlt,,5 Type: REG_SZ Data:
Value 20	Name: application/x-dvi,dvi,,5 Type: REG_SZ Data:	Data:  Value 32 Name: application/x-msexcel,xlw,,5 Type: REG_SZ Data:
Value 21	Name: application/x-gtar,gtar,,9 Type: REG_SZ Data:	Data:  Value 33 Name: application/x-msmediaview,m13,,5 Type: REG_SZ Data:
Value 22	Name: application/x-hdf,hdf,,5 Type: REG_SZ Data:	Data:  Value 34 Name: application/x-msmediaview,m14,,5 Type: REG_SZ Data:
Value 23	Name: application/x-latex,latex,,5 Type: REG_SZ Data:	Data:  Value 35 Name: application/x-msmetafile,wmf,,5 Type: REG_SZ Data:
Value 24	Name: application/x-msaccess,mdb,,5 Type: REG_SZ Data:	Data:  Value 36 Name: application/x-msmoney,mny,,5 Type: REG_SZ Data:
Value 25	Name: application/x-mscardfile,crd,,5 Type: REG_SZ Data:	Data:  Value 37 Name: application/x-mspowerpoint,ppt,,5 Type: REG_SZ Data:
Value 26	Name: application/x-msclip,clp,,5 Type: REG_SZ Data:	Data:  Value 38 Name: application/x-msproject,mpp,,5 Type: REG_SZ Data:
Value 27	Name: application/x-msexcel,xla,,5 Type: REG_SZ Data:	Data:  Value 39 Name: application/x-mspublisher,pub,,5 Type: REG_SZ Data:
Value 28	Name: application/x-msexcel,xlc,,5 Type: REG_SZ Data:	Data:  Value 40 Name: application/x-msterminal,trm,,5 Type: REG_SZ Data:
Value 29	Name: application/x-msexcel,xlm,,5 Type: REG_SZ Data:	Data:  Value 41 Name: application/x-msworks,wks,,5 Type: REG_SZ Data:
Value 30	Name: application/x-msexcel,xls,,5 Type: REG_SZ Data:	Data:  Value 42 Name: application/x-mswrite,wri,,5 Type:

Type:	REG_SZ	Name:	application/x-tar,tar,,5
Data:		Type:	REG_SZ
Value 43		Value 55	application/x-tcl,tcl,,5
Name:	application/x-netcdf,cdf,,5	Name:	REG_SZ
Type:	REG_SZ	Data:	
Data:		Value 56	application/x-tex,tex,,5
Value 44		Name:	REG_SZ
Name:	application/x-netcdf,nc,,5	Type:	
Type:	REG_SZ	Data:	
Data:		Value 57	application/x-texinfo,texi,,5
Value 45		Name:	REG_SZ
Name:	application/x-perfmon,pma,,5	Type:	
Type:	REG_SZ	Data:	
Data:		Value 58	application/x-texinfo,texinfo,,5
Value 46		Name:	REG_SZ
Name:	application/x-perfmon,pmc,,5	Type:	
Type:	REG_SZ	Data:	
Data:		Value 59	application/x-troff,roff,,5
Value 47		Name:	REG_SZ
Name:	application/x-perfmon,pml,,5	Type:	
Type:	REG_SZ	Data:	
Data:		Value 60	application/x-troff,t,,5
Value 48		Name:	REG_SZ
Name:	application/x-perfmon,pmr,,5	Type:	
Type:	REG_SZ	Data:	
Data:		Value 61	application/x-troff,tr,,5
Value 49		Name:	REG_SZ
Name:	application/x-perfmon,pmw,,5	Type:	
Type:	REG_SZ	Data:	
Data:		Value 62	application/x-troff-man,man,,5
Value 50		Name:	REG_SZ
Name:	application/x-sh,sh,,5	Type:	
Type:	REG_SZ	Data:	
Data:		Value 63	application/x-troff-me,me,,5
Value 51		Name:	REG_SZ
Name:	application/x-shar,shar,,5	Type:	
Type:	REG_SZ	Data:	
Data:		Value 64	application/x-troff-ms,ms,,5
Value 52		Name:	REG_SZ
Name:	application/x-sv4cpio,sv4cpio,,5	Type:	
Type:	REG_SZ	Data:	
Data:		Value 65	application/x-ustar,ustar,,5
Value 53		Name:	REG_SZ
Name:	application/x-sv4crc,sv4crc,,5	Type:	
Type:	REG_SZ	Data:	
Data:			
Value 54			

Value 66	Name: application/x-wais-source,src,,7 Type: REG_SZ Data:	Value 78	Name: image/ief,ief,,: Type: REG_SZ Data:
Value 67	Name: application/zip,zip,,9 Type: REG_SZ Data:	Value 79	Name: image/jpeg,jpe,,: Type: REG_SZ Data:
Value 68	Name: audio/basic,au,,< Type: REG_SZ Data:	Value 80	Name: image/jpeg,jpeg,,: Type: REG_SZ Data:
Value 69	Name: audio/basic,snd,,< Type: REG_SZ Data:	Value 81	Name: image/jpeg,jpg,,: Type: REG_SZ Data:
Value 70	Name: audio/x-aiff,aif,,< Type: REG_SZ Data:	Value 82	Name: image/tiff,tif,,: Type: REG_SZ Data:
Value 71	Name: audio/x-aiff,aifc,,< Type: REG_SZ Data:	Value 83	Name: image/tiff,tiff,,: Type: REG_SZ Data:
Value 72	Name: audio/x-aiff,aiff,,< Type: REG_SZ Data:	Value 84	Name: image/x-cmu-raster,ras,,: Type: REG_SZ Data:
Value 73	Name: audio/x-pn-realaudio,ram,,< Type: REG_SZ Data:	Value 85	Name: image/x-cmx,cmx,,5 Type: REG_SZ Data:
Value 74	Name: audio/x-wav,wav,,< Type: REG_SZ Data:	Value 86	Name: image/x-portable-anymap,pnm,,: Type: REG_SZ Data:
Value 75	Name: image/bmp,bmp,,: Type: REG_SZ Data:	Value 87	Name: image/x-portable-bitmap,pbm,,: Type: REG_SZ Data:
Value 76	Name: image/cis-cod,cod,,5 Type: REG_SZ Data:	Value 88	Name: image/x-portable-graymap,pgm,,: Type: REG_SZ Data:
Value 77	Name: image/gif,gif,,g Type: REG_SZ Data:	Value 89	Name: image/x-portable-pixmap,ppm,,: Type: REG_SZ Data:

Data:	Type: REG_SZ
Value 90 Name: image/x-rgb,rgb,,: Type: REG_SZ Data:	Value 102 Name: text/tab-separated-values,tsv,,0 Type: REG_SZ Data:
Value 91 Name: image/x-xbitmap,xbm,,: Type: REG_SZ Data:	Value 103 Name: text/x-setext,etx,,0 Type: REG_SZ Data:
Value 92 Name: image/x-xpixmap,xpm,,: Type: REG_SZ Data:	Value 104 Name: video/mpeg,mpe,,: Type: REG_SZ Data:
Value 93 Name: image/x-xwindowdump,xwd,,: Type: REG_SZ Data:	Value 105 Name: video/mpeg,mpeg,,: Type: REG_SZ Data:
Value 94 Name: text/html,htm,,h Type: REG_SZ Data:	Value 106 Name: video/mpeg,mpg,,: Type: REG_SZ Data:
Value 95 Name: text/html,html,,h Type: REG_SZ Data:	Value 107 Name: video/quicktime,mov,,: Type: REG_SZ Data:
Value 96 Name: text/html,stm,,h Type: REG_SZ Data:	Value 108 Name: video/quicktime,qt,,: Type: REG_SZ Data:
Value 97 Name: text/plain,bas,,0 Type: REG_SZ Data:	Value 109 Name: video/x-msvideo,avi,,< Type: REG_SZ Data:
Value 98 Name: text/plain,c,,0 Type: REG_SZ Data:	Value 110 Name: video/x-sgi-movie,movie,,< Type: REG_SZ Data:
Value 99 Name: text/plain,h,,0 Type: REG_SZ Data:	Value 111 Name: x-world/x-vrml,fldr,,5 Type: REG_SZ Data:
Value 100 Name: text/plain,txt,,0 Type: REG_SZ Data:	Value 112 Name: x-world/x-vrml,wrl,,5 Type: REG_SZ Data:
Value 101 Name: text/richtext,rtx,,0	Value 113

Name:	x-world/x-vrml,wrz,,5
Type:	REG_SZ
Data:	
Value 114	
Name:	x-world/x-vrml,xaf,,5
Type:	REG_SZ
Data:	
Value 115	
Name:	x-world/x-vrml,xof,,5
Type:	REG_SZ
Data:	
Key Name:	SYSTEM\CurrentControlSet\Services\InetInfo\Performance
Class Name:	<NO CLASS>
Last Write Time:	5/29/98 - 1:57 AM
Value 0	
Name:	Close
Type:	REG_SZ
Data:	CloseINFOPerformanceData
Value 1	
Name:	Collect
Type:	REG_SZ
Data:	CollectINFOPerformanceData
Value 2	
Name:	First Counter
Type:	REG_DWORD
Data:	0x738
Value 3	
Name:	First Help
Type:	REG_DWORD
Data:	0x739
Value 4	
Name:	Last Counter
Type:	REG_DWORD
Data:	0x756
Value 5	
Name:	Last Help
Type:	REG_DWORD
Data:	0x757
Value 6	
Name:	Library
Type:	REG_SZ
Data:	infoctrs.DLL
Value 7	
Name:	Open
Type:	REG_SZ
Data:	OpenINFOPerformanceData

## World Wide Web Server Registry Parameters

Key Name:	SYSTEM\CurrentControlSet\Services\W3SVC
Class Name:	<NO CLASS>
Last Write Time:	5/29/98 - 12:18 PM
Value 0	
Name:	DependOnGroup
Type:	REG_MULTI_SZ
Data:	
Value 1	
Name:	DependOnService
Type:	REG_MULTI_SZ
Data:	RPCSS NTLMSSP
Value 2	
Name:	DisplayName
Type:	REG_SZ
Data:	World Wide Web Publishing Service
Value 3	
Name:	ErrorControl
Type:	REG_DWORD
Data:	0
Value 4	
Name:	ImagePath
Type:	REG_EXPAND_SZ
Data:	C:\WINNT\System32\inetsrv\inetinfo.exe
Value 5	
Name:	ObjectName
Type:	REG_SZ
Data:	LocalSystem
Value 6	
Name:	Start
Type:	REG_DWORD
Data:	0x3
Value 7	
Name:	Type
Type:	REG_DWORD
Data:	0x20
Key Name:	SYSTEM\CurrentControlSet\Services\W3SVC\Enum
Class Name:	<NO CLASS>
Last Write Time:	11/6/98 - 3:04 PM
Value 0	
Name:	0
Type:	REG_SZ
Data:	Root\LEGACY_W3SVC\0000
Value 1	
Name:	Count

Type: REG_DWORD	Data: 0x1	Type: REG_SZ	Data: Default.htm
Value 2		Value 10	
Name: NextInstance	Type: REG_DWORD	Name: Dir Browse Control	
Data: 0x1		Type: REG_DWORD	
Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters	Class Name: <NO CLASS>	Data: 0x4000001e	
Last Write Time: 5/29/98 - 12:38 PM		Value 11	
Value 0		Name: Filter DLLs	
Name: AccessDeniedMessage	Type: REG_SZ	Type: REG_SZ	
Data: Error: Access is Denied.		Data: C:\WINNT\System32\inetsrv\sspfilt.dll	
Value 1		Value 12	
Name: AdminEmail	Type: REG_SZ	Name: GlobalExpire	
Data: Admin@corp.com		Type: REG_DWORD	
Value 2		Data: 0xffffffff	
Name: AdminName	Type: REG_SZ	Value 13	
Data: Administrator		Name: InstallPath	
Value 3		Type: REG_SZ	
Name: AnonymousUserName	Type: REG_SZ	Data: C:\WINNT\System32\inetsrv	
Data: IUSR_CLIENT4		Value 14	
Value 4		Name: LogFileDirectory	
Name: Authorization	Type: REG_DWORD	Type: REG_EXPAND_SZ	
Data: 0x5		Data: %SystemRoot%\System32\LogFiles	
Value 5		Value 15	
Name: CacheExtensions	Type: REG_DWORD	Name: LogFileFormat	
Data: 0x1		Type: REG_DWORD	
Value 6		Data: 0	
Name: CheckForWAISDB	Type: REG_DWORD	Value 16	
Data: 0		Name: LogFilePeriod	
Value 7		Type: REG_DWORD	
Name: ConnectionTimeOut	Type: REG_DWORD	Data: 0x1	
Data: 0x1c20		Value 17	
Value 8		Name: LogFileTruncateSize	
Name: DebugFlags	Type: REG_DWORD	Type: REG_DWORD	
Data: 0x8		Data: 0x1388000	
Value 9		Value 18	
Name: Default Load File		Name: LogSqlDataSource	
		Type: REG_SZ	
		Data: HTTPLOG	
		Value 19	
		Name: LogSqlPassword	
		Type: REG_SZ	
		Data: sqllog	
		Value 20	
		Name: LogSqlTableName	
		Type: REG_SZ	
		Data: Internetlog	
		Value 21	

Name: LogSqlUserName	Type: REG_SZ	Data: InternetAdmin	Value 0 Name: .idc Type: REG_SZ Data: C:\WINNT\System32\inetsrv\httpodbc.dll
Value 22 Name: LogType	Type: REG_DWORD	Data: 0	Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Virtual Roots Class Name: <NO CLASS> Last Write Time: 5/29/98 - 12:38 PM
Value 23 Name: MajorVersion	Type: REG_DWORD	Data: 0x2	Value 0 Name: /, Type: REG_SZ Data: C:\InetPub\wwwroot,,5
Value 24 Name: MaxConnections	Type: REG_DWORD	Data: 0x2710	Value 1 Name: /iisadmin, Type: REG_SZ Data: C:\WINNT\System32\inetsrv\iisadmin,,1
Value 25 Name: MinorVersion	Type: REG_DWORD	Data: 0	Value 2 Name: /Scripts, Type: REG_SZ Data: C:\InetPub\scripts,,4
Value 26 Name: NTAuthenticationProviders	Type: REG_SZ	Data: NTLM	Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Performance Class Name: <NO CLASS> Last Write Time: 5/29/98 - 1:57 AM
Value 27 Name: ScriptTimeout	Type: REG_DWORD	Data: 0x384	Value 0 Name: Close Type: REG_SZ Data: CloseW3PerformanceData
Value 28 Name: SecurePort	Type: REG_DWORD	Data: 0x1bb	Value 1 Name: Collect Type: REG_SZ Data: CollectW3PerformanceData
Value 29 Name: ServerComment	Type: REG_SZ	Data:	Value 2 Name: First Counter Type: REG_DWORD Data: 0x758
Value 30 Name: ServerSideIncludesEnabled	Type: REG_DWORD	Data: 0x1	Value 3 Name: First Help Type: REG_DWORD Data: 0x759
Value 31 Name: ServerSideIncludesExtension	Type: REG_SZ	Data: .stm	Value 4 Name: Last Counter Type: REG_DWORD Data: 0x790
Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Script Map Class Name: <NO CLASS> Last Write Time: 5/29/98 - 1:57 AM			Value 5 Name: Last Help Type: REG_DWORD Data: 0x791

Value 6  
 Name: Library  
 Type: REG\_SZ  
 Data: w3ctrs.DLL

Value 7  
 Name: Open  
 Type: REG\_SZ  
 Data: OpenW3PerformanceData

Key Name: SYSTEM\CurrentControlSet\Services\W3SVC\Security  
 Class Name: <NO CLASS>  
 Last Write Time: 5/29/98 - 1:57 AM  
 Value 0  
 Name: Security  
 Type: REG\_BINARY  
 Data:  
 00000000 01 00 14 80 c0 00 00 00 - cc 00 00 00 14 00 00 00  
 .....  
 00000010 34 00 00 00 02 00 20 00 - 01 00 00 00 02 80 18 00 4.....  
 .....  
 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
 .....  
 00000030 20 02 00 00 02 00 8c 00 - 05 00 00 00 00 00 18 00  
 .....  
 00000040 8d 01 02 00 01 01 00 00 - 00 00 00 01 00 00 00 00  
 .....  
 00000050 00 00 73 00 00 00 1c 00 - fd 01 02 00 01 02 00 00  
 .....  
 00000060 00 00 00 05 20 00 00 00 - 23 02 00 00 c8 00 14 00 ....  
 .....#.....  
 00000070 00 00 1c 00 ff 01 0f 00 - 01 02 00 00 00 00 00 05  
 .....  
 00000080 20 00 00 00 20 02 00 00 - c8 00 14 00 00 00 1c 00 ...  
 .....  
 00000090 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 .....  
 .....  
 000000a0 25 02 00 00 c8 00 14 00 - 00 00 18 00 fd 01 02 00 %.....  
 .....  
 000000b0 01 01 00 00 00 00 00 05 - 12 00 00 00 25 02 00 00 .....%.....  
 .....  
 000000c0 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00 .....  
 .....  
 000000d0 00 00 00 05 12 00 00 00 - .....  
 .....

Key Name: SOFTWARE\Unisys  
 Class Name: <NO CLASS>  
 Last Write Time: 5/29/98 - 12:34 PM  
 Value 0  
 Name: MAXTERMS  
 Type: REG\_SZ  
 Data: 6000  
 Key Name: SOFTWARE\Unisys\TPCC  
 Class Name: <NO CLASS>  
 Last Write Time: 6/1/98 - 3:18 PM

## Tuxedo Configuration

Note: this configuration file is repeated on each of the other 2 clients with the exception of the Hostname, "CLIENT1", which is replaced by "CLIENT2" thru "CLIENT3".

```
*RESOURCES
IPCKEY 133133

MAXACCESSERS 400
MAXSERVERS 210
MAXSERVICES 1100
MODEL SHM
MASTER tpcctm
LDBAL N
SCANUNIT 60
BLOCKTIME 60
BBLQUERY 60

*MACHINES
DEFAULT:

CLIENT1 LMID=tpcctm
TUXDIR="c:\tuxedo"
APPDIR="c:\tuxedo\runtime"
TUXCONFIG="c:\tuxedo\runtime\tuxconfig"
ULOGPFX="c:\tuxedo\runtime\ulog\ULOG"
TYPE="WinNT"
UID=0
GID=0

*GROUPS
GRALL LMID=tpcctm GRPNO=1 OPENINFO=NONE
GRDEL LMID=tpcctm GRPNO=3 OPENINFO=NONE

*SERVERS
DEFAULT:
CLOPT="-A -- -sAVALON4 -dtpcc"

tpccsvr SRVGRP=GRALL
SRVID=100
MIN=75 MAX=200
RQADDR=allq REPLYQ=Y

tpccdelv SRVGRP=GRDEL
SRVID=300
MIN=8 MAX=10
CLOPT="-A -- -sAVALON4 -dtpcc"
RQADDR=delq REPLYQ=Y

*SERVICES
```

## Appendix D - RTE Code

### Admin Environment

```
if '%1'=='' goto usage
if '%2'=='' goto usage
if '%3'=='' goto usage

:paramok

net time \\%1 /SET /Y

if %ERRORLEVEL% NEQ 0 pause

set WEBADMINCFG=web%2.cfg
set WEBMAXDRIVERS=%3
set WEBDIAGLEVEL=4
set WEBEVENTLOG=0
set WEBEVENTHOST=
set WEBCHECKLEVEL=2

webadmin.exe

goto end

:usage
@ECHO You must supply the following parameters:
@ECHO "webnnn.cmd <clock sync host name> <cfg file suffix> <driver count>"
pause

:end
```

### Profiles used for Performance Run

#### Web1530.cfg

```
//
// Common Driver Configuration
//
INITBASEPORT 4300
INITSYNCMAX 4
INITPAUSE 1
INITRSCALE 400
INITTSCALE 100
INITRWID 1, 1530
INITFIXEDWID 1
INITCCLAST 208
INITCCID 208
INITCITEMID 208
//
// Configuration Driver 1
```

```
//
1 INITIPADDR 192.168.90.31
1 INITIISADDR 192.168.13.1
1 INITIISPORT 80
1 INITBROWSERS 1020
1 INITMYWID 1,102
//
// Configuration Driver 2
//
2 INITIPADDR 192.168.90.32
2 INITIISADDR 192.168.23.2
2 INITIISPORT 80
2 INITBROWSERS 1020
2 INITMYWID 103,204
//
// Configuration Driver 3
//
3 INITIPADDR 192.168.90.33
3 INITIISADDR 192.168.33.3
3 INITIISPORT 80
3 INITBROWSERS 1020
3 INITMYWID 205,306
//
// Configuration Driver 4
//
4 INITIPADDR 192.168.90.33
4 INITIISADDR 192.168.34.3
4 INITIISPORT 80
4 INITBROWSERS 1020
4 INITMYWID 307,408
//
// Configuration Driver 5
//
5 INITIPADDR 192.168.90.32
5 INITIISADDR 192.168.24.2
5 INITIISPORT 80
5 INITBROWSERS 1020
5 INITMYWID 409,510
//
// Configuration Driver 6
//
6 INITIPADDR 192.168.90.31
6 INITIISADDR 192.168.14.1
6 INITIISPORT 80
6 INITBROWSERS 1020
6 INITMYWID 511,612
//
// Configuration Driver 7
//
7 INITIPADDR 192.168.90.31
7 INITIISADDR 192.168.15.1
7 INITIISPORT 80
7 INITBROWSERS 1020
7 INITMYWID 613,714
```

```

// Configuration Driver 8
// 8 INITIPADDR 192.168.90.32
8 INITIISADDR 192.168.25.2
8 INITIISPORT 80
8 INITBROWSERS 1020
8 INITMYWID 715,816
// Configuration Driver 9
// 9 INITIPADDR 192.168.90.33
9 INITIISADDR 192.168.35.3
9 INITIISPORT 80
9 INITBROWSERS 1020
9 INITMYWID 817,918
// Configuration Driver 10
// 10 INITIPADDR 192.168.90.34
10 INITIISADDR 192.168.32.3
10 INITIISPORT 80
10 INITBROWSERS 1020
10 INITMYWID 919,1020
// Configuration Driver 11
// 11 INITIPADDR 192.168.90.34
11 INITIISADDR 192.168.22.2
11 INITIISPORT 80
11 INITBROWSERS 1020
11 INITMYWID 1021,1122
// Configuration Driver 12
// 12 INITIPADDR 192.168.90.34
12 INITIISADDR 192.168.12.1
12 INITIISPORT 80
12 INITBROWSERS 1020
12 INITMYWID 1123,1224
// Configuration Driver 13
// 13 INITIPADDR 192.168.90.35
13 INITIISADDR 192.168.16.1
13 INITIISPORT 80
13 INITBROWSERS 1020
13 INITMYWID 1225,1326
// Configuration Driver 14
// 14 INITIPADDR 192.168.90.35
14 INITIISADDR 192.168.26.2
14 INITIISPORT 80
14 INITBROWSERS 1020
14 INITMYWID 1327,1428
// Configuration Driver 15
// 15 INITIPADDR 192.168.90.35
15 INITIISADDR 192.168.36.3
15 INITIISPORT 80
15 INITBROWSERS 1020
15 INITMYWID 1429,1530
// if '%1==' goto usage
:paramok
set WEBDRIVERNO=%1
set WEBADMBASEPORT=4300
set WEBDIAGLEVEL=2
set WEBEVENTLOG=1
set WEBEVENTHOST=
set WEBLOGLEVEL=1
set WEBSINGLETRAN=0
set WEBTPCCAUDIT=0
set WEBRTFUDGETM=110
set WEBNEWORDERPROB=4484
set WEBPAYMENTPROB=4307
set WEBORDERSTATUSPROB=403
set WEBDELIVERYPROB=403
set WEBSTOCKLEVELPROB=403
set WEBTTNEWORDER=12030
set WEBTTPAYMENT=12030
set WEBTTDELIVERY=5060
set WEBTTORDERSTATUS=10070
set WEBTTSTOCKLEVEL=5060
webdriver.exe > webdriver%1.log
goto end
:usage
@ECHO You must supply the following parameters:
@ECHO "webdriver.cmd <driver number>"
pause
:end
exit

```

## Driver Environment

## **Appendix E - Disk Storage**

### **TPC-C 180-Day Disk Space Requirements**

Warehouses	1530	tpmC	19,118.37	12.50
<b>Table</b>				
Warehouse	<b>Initial Rows</b>	<b>Data KB</b>	<b>Index KB</b>	<b>Extra 5% KB</b>
District	1,530	168	32	10
Customer	15,300	1,704	48	88
History (D)	45,900,000	33,381,824	2,143,768	1,776,280
Order (D)	45,900,000	2,550,048	0	2,550,048
New-Order	13,770,000	1,406,904	777,088	2,183,992
Order-Line (D)	459,001,971	28,687,624	71,464	229,236
Item	100,000	9,528	72	480
Stock	15,300,000	48,960,000	109,744	2,453,487
<b>Totals KB</b>		115,215,512	3,102,824	122,559,596
<b>DbFilegroup</b>				
master, model & msdb	<b>Count</b>	<b>Size MB</b>	<b>MB Allocated</b>	<b>MB Loaded +5%</b>
tempdb	22	22	22	22
mssql170_tpcc_root	1	210	210	210
mssql170_cs_fg	5	10	10	10
mssql170_misc_fg	5	18,400	92,000	86,743
<b>Total Allocated MB</b>		8,800	44,000	32,944
			<b>136,242</b>	<b>119,929</b>
				<b>127,911</b>
<b>MB</b>				
Dynamic Space MB		31,879	Sum of data for orders, order_line & history	
Static Space		87,808	Sum of data+index+5% - Dynamic Space	
Free Space		16,555	Total allocated space - (Dynamic & Static Spaces)	
Daily Growth		6,374	(Dynamic Space / (W * 62.5)) * tpmC	
Daily Spread		6,994	Free space - 1.5 * Daily growth (zero if negative)	
		0	SQL Server can be configured to eliminate Daily Spread	
180 Day Space MB		1,235,071	Static Space + 180 * (Daily Growth + Daily Spread)	
180 Day Space GB		<b>1,206.12</b>		
8 hr log GB		<b>46.91</b>	(need double for mirroring)	
Disk Capacity MB				
180-day space DB	<b>GB Needed</b>	<b>Disks Priced</b>	<b>GB Priced</b>	
Total DB	1206.12 GB	0	0.00 GB	4GB drives
			1195.61 GB	9GB drives
		<b>141</b>	<b>1195.61 GB</b>	
8-hr log+mirror OS, SQL Server				
<b>Total space</b>		<b>1301.04 GB</b>	<b>154</b>	<b>1301.60 GB</b>

### TPC-C 180-Day Dynamic Table Growth Rates

Tables	Initial (KB)	Final (KB)	Change(KB)	Unused (KB)	KB / New-Order	8-Hr MB	19,118.37 tpmC
History	2,550,048	3,138,048	588,000	96,056	0.0731	3,145.59	
Orders	2,183,992	3,446,256	1,262,264	10,520	0.1570	3,539.56	
Order_line	28,759,088	34,070,608	5,311,520	8,680	0.6605	34,004.58	
<b>Dynamic</b>	<b>33,493,128</b>	<b>40,654,912</b>	<b>7,161,784</b>	<b>115,256</b>	<b>0.8906</b>	<b>40,689.73</b>	
New_order	218,320	369,928	151,608	11,312	0.0189	382.17	
Static							
Log	371,392	43,152,347	42,780,955		5.3202	48,040.78	
SUM(d_next_o_id)	45,915,300	53,956,554	8,041,254			46.915	

## Appendix F - Third-Party Price Quotations

NDU 23 1998 17:41 FR MICROSOFT RECP #1 425 936 7329 TO 919493805539 P.02/03  
One Microsoft Way  
Redmond, WA 98052-8399 Fax: 425 936 1329  
<http://www.microsoft.com/>

**Microsoft**

November 23, 1998

Mr. Jerrold Buggert  
Director, Systems Analysis, Modeling, Measurement  
Unisys Corporation  
25725 Jeronimo Road  
Mission Viejo, CA 92691

via FAX # 949-380-5539

Dear Jerry,

Microsoft has received your request for permission to disclose the results of TPC-C benchmark tests conducted by Unisys with Microsoft SQL Server 7.0, Enterprise Edition on the following system:

Unisys Aquanta QS2V Server, 4-processors, Pentium II Xeon, 400 MHz, 1MB L2 cache  
Test Results: 19100 tpmC @ \$22/tpmC approximately

Microsoft hereby grants Unisys permission to disclose these results to third parties and acknowledges that Unisys has formally requested permission to do so in accordance with the license agreement for Microsoft SQL Server 7.0 software.

Best regards,

  
Sid Arora

Product Manager, Microsoft SQL Server  
Applications Marketing

NOV 23 1998 17:41 FR MICROSOFT REC'D #1  
One Microsoft Way  
Redmond, WA 98052-6399  
<http://www.microsoft.com/>

P.03/03

**Microsoft®**

November 23, 1998

Mr. Jerrold Buggert  
Director, Systems Analysis, Modeling, Measurement  
Unisys Corporation  
25725 Jeronimo Road  
Mission Viejo, CA 92691

via FAX # 949-380-5539

Dear Jerry,

Here is the information you requested regarding pricing of certain Microsoft products:


Microsoft SQL Server 7.0, Enterprise Edition, unlimited user licence	\$28999
Microsoft Windows NT Server, Enterprise Edition 4.0, incl 25 CALs	\$3999
Windows NT Server 4.0 software, incl 5 CALs	\$809
Visual C++ Professional 5.0	\$499
5-yr maintenance for above software @ \$2095/yr	\$10475

This quote is valid for the next 60 days. Please let me know if I can be of any further assistance.

Best regards,

  
\_\_\_\_\_  
Sid Arora

Sid Arora  
Product Manager, Microsoft SQL Server  
Applications Marketing



# WESTERN MICRO

Western Micro Technology

(800)937-8446

12/1/98

Quoted to: Jerry Buggett/Unisys for TPC.org

Prepared by: Tony Jacobs

Qty.	Description	Style	Price	Extended Price
1	SYS: Aquanta QSi2V w/ CDRom, 0 Proc, 0MB Mem	QVS200071-BCS	\$5,100	\$5,100
4	PROC: 1x400MHz Pentium II /1MB Cache	XEV2400-1MB	\$3,627	\$14,508
6	ACC: Voltage Regulator Module, Processor	XEO24001-VRM	\$46	\$276
16	MEM: 256 MB Memory Upgrade	DIM5072-256	\$963	\$15,408
1	DISK: 4GB Drive, Ultra SCSI SCA	HDS417-CX1	\$746	\$746
1	ETHERNET: 100Mbit/sec, PCI 32-bit	ETH1010051-PCI	\$117	\$117
1	CDROM: 14-32x Speed, SCSI	CDR1432-SI	\$161	\$161
1	MONITOR: 15-inch Color	EVG2100-P	\$320	\$320
1	KEYBD: 104 Key Spacesaver	PCK104-SKB	\$31	\$31
1	MOUSE: 2 Button PS2	PWM1-PS2	\$23	\$23
<b>Server Total</b>			<b>\$36,690</b>	
12	CBL: SCSI 68-pin HD Conn.	CBL2210-OSM	\$90	\$1,080
169	DISK: 9GB Drive, 10K, SCA + 10% spares	OSD9203-W45	\$930	\$157,170
10	CAB: 7 SCA Disk Cage w/ 050 I/F & Cat Cbl, 3U	OSM310050-U05	\$1,345	\$13,450
2	CAB: 7 SCA Disk Cage w/ 100 I/F, 0MB, 3U	OSM310100-U05	\$1,350	\$13,500
2	MEM: 32MB OSM Cache	OSM1000-C32	\$2,727	\$5,454
22	CAB: Rackmount Kit for Disk Cages	OSM3000-RMK	\$150	\$300
2	PWR: OSM 2nd Power Supply	OSM3000-APM	\$84	\$1,848
1	PWR: 3000 VA UPS, 3U	UPD30001-SXR	\$261	\$522
2	CAB: Rack Cabinet, w/ fill pnls, 36U	CAB3611-SXR	\$2,239	\$4,478
2	CAB: Bezel kit 36U	BEZ3611-CAB	\$1,384	\$2,768
2	CAB: Stabilizer kit 0U	WGT39581-SXR	\$206	\$412
2	PNL: L&R side panels 36U	PAN3621-SXR	\$110	\$220
<b>Storage Total</b>			<b>\$199,347</b>	
3	SYS: Aquanta GPS, 0 Proc, 0MB Mem	GPS60071-BAS	\$945	\$2,835
6	PROC: 1x300MHz Pentium II/512KB Cache	GPS2300-512	\$863	\$5,178
3	UPGRD: GPS P-II 2nd CPU Supt.	GPS60071-P2U	\$32	\$96
6	MEM: 128 MB Memory Upgrade	DIM672-128	\$741	\$4,446
3	DISK: 2GB Ultra SCSI 3.5 Internal	HDS2000-SW7	\$573	\$1,719
3	CDROM: 14-32x Speed, SCSI	CDR1432-SI	\$161	\$483
6	ETHERNET: 100Mbit/sec, PCI 32-bit, Quad	ETH101007-PCI	\$101	\$606
3	ETHERNET: 100Mbit/sec, PCI 32-bit, Quad	SF1001-ET4	\$1,212	\$3,636
3	MONITOR: 15-inch Color	EVG2100-P	\$320	\$960
3	KEYBD: 104 Key Spacessaver	PCK104-SKB	\$31	\$93
3	MOUSE: 2 Button PS2	PWM1-PS2	\$23	\$69
<b>Client Total</b>			<b>\$20,121</b>	
<b>Server, Storage and Client Total</b>			<b>\$256,158</b>	
<b>Discount biased on total dollar volume</b>			<b>(\$25,616)</b>	
<b>Quote Total</b>			<b>\$230,542</b>	

Quote valid for 75 days.

Disk come with return to factory, 5 year warranty, 7 day replenishment

# Quotation



To: Glenn Weeks	From: Michael Alam
Company: Unisys Corporation - Orange County Operations 25725 Jeronimo Rd Mission Viejo, CA 92531	Date: October 28, 1998
RE: MyLex ExtremeRAID DAC1164P	Total Pages: 1

Dear Mr. Weeks,

MyLex is pleased to submit the following quotation for the ExtremeRAID controller:

Part # / Description

DAC1164P-3E-32-MY

MSRP

\$2338 ea

PCI RAID Ultra 2 (LVD) DAC1164P 3E/2I CH 32MB w/Battery Back Up

Notes:

*Above prices are based on FOB, ex-factory, Fremont, California and firm for 90 days.*

*Lead time: 30 days ARO.*

*Product is covered by a 3 year warranty, and maintenance cost for additional 2 years is \$50.*

*Failed product will be repaired or replaced within 7 days.*

Best regards,

Michael Atam, Regional Sales Manager

34551 Ardenwood Blvd.  
Fremont, CA 94535-3607  
Tel: 510.796.6100  
Sales Fax: 510.745.8016  
[www.mylex.com](http://www.mylex.com)

October 6, 1998

Mr. Jerrold Buggert  
 Director, Systems Analysis, Modeling, Measurement  
 Unisys Corporation  
 25725 Jeronimo Road  
 Mission Viejo, CA 92691  
 Fax (714) 380-5468

Dear Mr. Buggert:

Per your request I am enclosing the pricing information regarding TUXEDO 6.x that you requested. This pricing applies to Tuxedo 6.1, 6.2, 6.3 and 6.4. Please note that Tuxedo 6.4 is our most recent version of Tuxedo but that all 6.x releases are generally available. Core functionality services pricing is appropriate for your activities. As per the table below, server systems are classified in one of 5 tiers based on CPU type and capacity. The Acquaanta GPS systems with 2 CPU capacity are classified as tier 1 systems, those with 4 CPU capacity are tier 2.

**Tuxedo Core Functionality Services (CFS) Program Product Pricing and Description**

TUX-CFS provides a basic level of middleware support for distributed computing, and is best used by organizations with substantial resources and knowledge for advanced distributed computing implementations.

TUX-CFS prices are server only and are based on the overall performance characteristics of the server and uses the same five tier computer classification as TUXEDO 6.x. Prices range from \$3,000 for Tier 1 to \$250,000 for Tier 5. Under this pricing option EVERY system running TUX-CFS at the user site must have a TUXEDO license installed and pay the appropriate per server license fees.

**BEA Tux/CFS Unlimited User License Fees Per Server**

<b>Unlimited User License fees per server</b>	<b>Number of Users</b>	<b>Dollar Amount</b>	<b>Maintenance (5 x 8) per year</b>	<b>Maintenance (7 x 24) per year</b>
Tier 1 -- PC Servers with 1 or 2 CPUs, entry level RISC Uni-processor workstations and servers (Class 1 and Class 2)	Unlimited	\$3,000.00	\$450.00	\$660.00
Tier 2 -- PC Servers with 3 or 4 CPUs, Midrange RISC Uni-processor servers and workstations (class 3)	Unlimited	\$12,000.00	\$1,800.00	\$2,640.00
Tier 3 -- Midrange Multiprocessors, up to 8 CPUs per system capacity (Class 4 and 5)	Unlimited	\$30,000.00	\$4,500.00	\$6,600.00

Tier 4 -- Large (more than 8, less than 32 CPUs) and Mainframe Systems (Class 6)	Unlimited	\$100,000.00	\$15,000.00	\$22,000.00
Tier 5 -- Massively Parallel Systems, > 32 processors	Unlimited	\$250,000.00	\$37,500.00	\$55,000.00

**Intel based server tier classifications:**

Platform	Operating System	Tier 1	Tier 1	Tier 2	Tier 3	Tier 3
Intel Pentium/ Pro PCs	Interactive R3.2 ESIX SVR 4.0 SCO UNIX 3.2.2 and 3.2.4 SCO ODT 2.x,3.x Solaris x86 2.X UnixWare Windows NT 3.5/4.0	All PCs are Class 1	All 386/486 and Pentium Pro PCs with 1 or 2 CPUs capacity are Tier 1	All Pentium and Pentium Pro PCs with 3 or 4 CPUs capacity are Tier 2	All Pentium and Pentium Pro PCs with 5,6,7, or 8 CPUs are Tier 3	All Pentium and Pentium Pro PCs with 5,6,7, or 8 CPUs are Tier 3

Very Truly Yours,

Lewis D. Brentano,  
Director, Market Planning

~~FAXED At 11/19/98 02:07:19 Date 1~~

NOVEMBER 18th, 1998

RICK FREEMAN  
UNISYS CORPORATION  
25725 JERONIMO ROAD  
MISSION VIEJO, CALIFORNIA, 92691  
FAX: 949-380-5539

RICK

HERE IS THE MODIFIED QUOTE AS REQUESTED BY GLEN WEEKS.

ITEM	QTY.	DESCRIPTION	UNIT	EXTENDED
DEH2924	2000+	COMPEX TP1008C 8 PORT 10BASE-T HUB WITH BNC UPLINK. LIFETIME WARRANTY.	\$ 33.00	\$ 66,000.00
DEH2648	2000+	LANTECH LTC WORKGROUP 8 PORT 10BASE-T HUB WITH SWITCH SELECTABLE 8 <sup>th</sup> PORT AS UPLINK OR DEDICATED 8 <sup>th</sup> PORT. 5 YEAR WARRANTY.	\$ 34.50	\$ 69,000.00
DEH4009	2000+	MACSENSE 8 PORT 10BASE-T HUB WITH BNC & RJ45 UPLINK PORTS. LIFETIME WARRANTY	\$ 33.95	\$ 67,900.00

THIS QUOTE IS VALID FOR 90 DAYS.  
THANK YOU FOR YOUR CONSIDERATION

BOB CHENEY  
ACCOUNT MANAGER  
DATACOMM WAREHOUSE  
800-528-2261 EXT: 22878  
732-942-2513 OR 732-905-5731 FAX  
CHENEYR@MWHSE.COM



**NETLUX**

**1-800-799-1780**

Phone#626-851-9737

Fax #626-851-9837

14180 Live Oak Ave., Unit E  
Baldwin Park, Ca. 91760

December 2, 1998

Rick Freeman  
Unisys Corporation  
25725 Jeronimo Road  
Mission Viejo, CA 92691  
Fax: (949) 380-5539  
cc: (949) 380-5344

**Quotation**

---

Quantity	Part No.	Description	Unit Price	Total
3	NX-H8TXD	8-port 100Mbps FAST Ethernet Hub	\$205.00	\$615.00

Terms and Conditions:  
FOB Origin  
Quote Valid for 90 days  
5 Year Warranty

Sincerely,  
Martin Parry  
NETLUX