

TPC Benchmark™ E
Full Disclosure Report
for
Lenovo® ThinkSystem™ SR655 V3
using
Microsoft® SQL Server® 2022
Enterprise Edition
and
Microsoft Windows Server® 2022
Standard Edition

TPC-E™ Version 1.14.0



First Edition
Submitted for Review
April 29, 2025

First Edition – April 2025

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESSED OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by Lenovo for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

In this document, any references made to a Lenovo licensed program are not intended to state or imply that only Lenovo's licensed program may be used; any functionally equivalent program may be used.

This publication was produced in the United States. Lenovo may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change without notice. Consult your local Lenovo representative for information on products and services available in your area.

© Copyright Lenovo 2025. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

Trademarks

Lenovo, ServeRAID, ThinkSystem, and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. These and other Lenovo trademarked terms are marked on their first occurrence in this information with the appropriate symbol (® or ™), indicating US registered or common law trademarks owned by Lenovo at the time this information was published. Such trademarks may also be registered or common law trademarks in other countries. A current list of Lenovo trademarks is available on the Web at <http://www3.lenovo.com/us/en/legal/copytrade/>.

The following terms used in this publication are trademarks of other companies as follows: TPC Benchmark, TPC-E, and tpsE are trademarks of the Transaction Processing Performance Council; Intel and Xeon are trademarks of Intel Corporation in the U.S. and/or other countries; Microsoft, Windows Server, and SQL Server are registered trademarks of Microsoft Corporation in the United States and/or other countries; AMD, AMD EPYC, and EPYC are trademarks or registered trademarks of Advanced Micro Devices, Inc. Other company, product, or service names, which may be denoted by two asterisks (**), may be trademarks or service marks of others.

Notes

¹ GHz and MHz only measures microprocessor internal clock speed, not application performance. Many factors affect application performance.

² When referring to hard disk capacity, GB, or gigabyte, means one thousand million bytes. Total user-accessible capacity may be less.

Abstract

Lenovo conducted the TPC Benchmark E (TPC-E) on the Lenovo ThinkSystem SR655 V3. This report documents the full disclosure information required by the TPC Benchmark E Standard Specification, Revision 1.14.0, including the methodology used to achieve the reported results. All testing fully complied with this revision level.

The software used on the Lenovo ThinkSystem SR655 V3 system included Microsoft Windows Server 2022 Standard Edition and Microsoft SQL Server 2022 Enterprise Edition.

Standard metrics, transactions per second-E (tpsE™), price per tpsE (\$/tpsE) and Availability Date, are reported as required by the TPC Benchmark E Standard Specification.

The benchmark results are summarized in the following table:


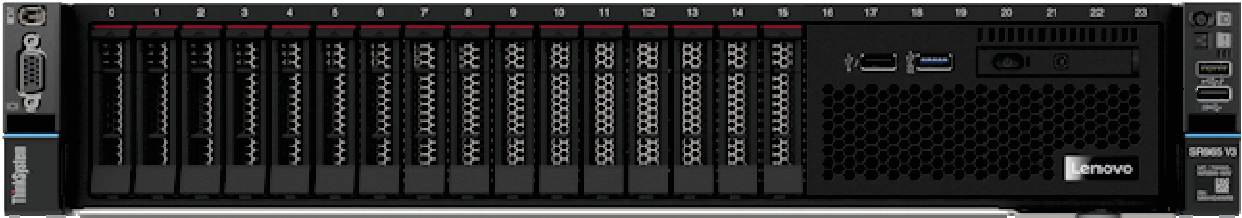


Hardware	Software	Total System Cost (\$USD)	tpsE	\$ USD / tpsE	Total Solution Availability Date
Lenovo ThinkSystem SR655 V3	Microsoft SQL Server 2022 Enterprise Edition Microsoft Windows Server 2022 Standard Edition	\$1,498,715	18,682.14	\$80.23	April 29, 2025

The benchmark implementation and results were audited by Doug Johnson for InfoSizing (www.sizing.com). The auditor’s attestation letter is contained in this report.

Executive Summary

The TPC Executive Summary Statement must be included near the beginning of the Report.

The Executive Summary is included on the next several pages.

	Lenovo® ThinkSystem™ SR655 V3		TPC-E™ 1.14.0 TPC Pricing 2.9.0
			Report Date: April 29, 2025 Revision Date: April 29, 2025
TPC-E Throughput 18,682.14 tpsE™	Price/Performance \$80.23 USD per tpsE	Availability Date April 29, 2025	Total System Cost \$1,498,715 USD
Database Server Configuration			
Operating System Microsoft® Windows Server® 2022 Standard Edition	Database Manager Microsoft SQL Server® 2022 Enterprise Edition	Processors/Cores/Threads 1/160/320	Memory 1536GB
<div>  <div> <div>4X 10Gb Ethernet</div> <div>12X 12Gb SAS</div> </div> <div>  <div>6 x</div>  </div> </div>			
TIER A (Client) 1 x Lenovo ThinkSystem SR650 V3: <ul style="list-style-type: none"> - 2 x Intel Xeon Gold 6442Y Processors @ 2.60GHz (2 Procs/48 Cores/96 Threads) - 256GB Memory - 2 x 960GB SATA SSD (RAID-1) - 1 x ThinkSystem RAID 940-8i - 1 x Quad 10Gb-T Ethernet - 2 x Dual 10Gb-T Ethernet 		TIER B (Database Server and Storage) 1 x Lenovo ThinkSystem SR655 V3: <ul style="list-style-type: none"> - 1 x AMD EPYC 9845 160-Core Processor @ 2.1GHz (1 Proc/160 Cores/320 Threads) - 1536GB Memory - 2 x 480GB SATA SSD (RAID-1) - 8 x 1600GB SAS SSD (RAID-10) - 6 x 3200GB SAS SSD (RAID-5) - 1 x ThinkSystem RAID 940-16i - 6 x ThinkSystem RAID 940-8e - 1 x Quad 10Gb-T Ethernet - 1 x Dual 10Gb-T Ethernet 	
		6 x Lenovo Storage D1224 DAS Enclosures, with: <ul style="list-style-type: none"> - 144 x 800GB 2.5" SAS SSD (6 x 24-drive RAID-5) 144 Total External Drives	
Initial Database Size 78,094 GB	Redundancy Level: 1 RAID-10 Log, tempdb RAID-5 Data	Storage 144x 800GB 2.5" SAS SSD 2x 480GB 2.5" SATA SSD 8x 1600GB 2.5" SAS SSD 6x 3200GB 2.5" SAS SSD	



Lenovo ThinkSystem SR655 V3

TPC-E 1.14.0 TPC Pricing 2.9.0

Report Date: April 29, 2025
Revision Date: April 29, 2025

Availability Date:
April 29, 2025

Description	Part Number	Price Source	Unit Price	Quantity	Extended Price	3- Year Maint Price
Server Hardware						
ThinkSystem SR655 V3 Configure-To-Order, includes:						
ThinkSystem V3 2U 24x2.5" Chassis	7D9ECTO1WW	1	188,536	1	188,536	
ThinkSystem AMD EPYC 9845 160C 390W 2.1GHz Processor	BLKK			1		
ThinkSystem SR655 V3 2U High Performance Heatsink	C2TD			1		
ThinkSystem 128GB TruDDR5 6400MHz (2Rx4) RDIMM-A	BQF9			1		
ThinkSystem RAID 940-16i 8GB Flash PCIe Gen4 12Gb Adapter	C0CL			12		
ThinkSystem 2.5" PM1655 1.6TB Mixed Use SAS 24Gb HS SSD	B8NZ			1		
ThinkSystem 2.5" S4520 480GB Read Intensive SATA 6Gb HS SSD	BNW9			8		
ThinkSystem 2.5" PM1655 3.2TB Mixed Use SAS 24Gb HS SSD	BA7G			2		
ThinkSystem 2U 8x2.5" SAS/SATA Backplane	BNW6			6		
ThinkSystem Broadcom 57454 10GBASE-T 4-port OCP Ethernet Adapter	B8LU			2		
ThinkSystem RAID 940-8e 4GB Flash PCIe Gen4 12Gb Adapter	B5T4			1		
ThinkSystem Broadcom 57416 10GBASE-T 2-Port PCIe Ethernet Adapter	BNWJ			6		
ThinkSystem V3 2U x16/x8/x8 PCIe Gen4 Riser1 or 2	AUKP			1		
ThinkSystem V3 2U x16/x16 PCIe Gen4 Riser3 Kit with Cage	BLKL			2		
ThinkSystem 1800W 230V Platinum Hot-Swap Gen2 Power Supply	BPKG			1		
2.8m, 13A/100-250V, C13 to C14 Jumper Cord	BMUF			2		
ThinkSystem 2U V3 Performance Fan Module	6400			2		
ThinkSystem Toolless Friction Rail v2	BLL6			6		
ThinkSystem 2U V3 EIA Latch Standard	BK7W			1		
ThinkSystem SR655 V3 MB w/IO+PIB+FB,2U	BQQ2			1		
ThinkSystem 2U V3 EIA right with FIO	C2AC			1		
ThinkSystem SR655 V3 Main Airduct	BQQ6			1		
ThinkSystem 2U MS 3FH Riser 1&2 Cage w/Label1	BQ81			1		
ThinkSystem 2U MS 3FH Riser 1&2 Cage w/ lb2	BPKD			1		
ThinkSystem RAID 930/940 SuperCap	BLLD			1		
ThinkSystem SR635 V3/SR655 V3 Root of Trust Module Low Voltage-RoW V2	AUNP			7		
ThinkSystem MS 2U common Airduct Filler	C1PT			1		
3Yr Premier 24x7 4Hr Resp SR655 V3	BQ31			1		
	5WS7C00976	1	1,997	1		1,997
Subtotal					188,536	1,997
Server Storage						
Lenovo Storage D1224 SFF Chassis, Dual ESM	4587A31	1	2,999	6	17,994	
External MiniSAS HD 8644/MiniSAS HD 8644 1M Cable	00YL848	1	79	12	948	
Lenovo Storage 800GB 3DWD 2.5" SAS SSD	01DC477	1	2,499	144	359,856	
1.5m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable	39Y7937	1	49	12	588	
12Gb SAN Rack Mount Kit-Rails 25"-36"	01DC146	1	149	6	894	
Essential Service - 3Yr 24x7 4Hr Resp DS Series Disk Exp	01JR577	1	1,169	6		7,014
Subtotal					380,280	7,014
Server Software						
SQL Server 2022 Enterprise Edition (2 Core License)	N/A	2	15,123	80	1,209,840	
Windows Server 2022 Standard Edition (16 Core License)	N/A	2	1,069	10	10,690	
Microsoft Problem Resolution Services (1 Incident)	N/A	2	259	1		259
Subtotal					1,220,530	259
Client Hardware						
ThinkSystem SR650 V3 Configure-To-Order, includes:						
ThinkSystem V3 2U 24x2.5" Chassis	7D76CTO1WW	1	39,324	1	39,324	
Intel Xeon Gold 6442Y 24C 225W 2.6GHz Processor	BLKK			1		
ThinkSystem 16GB TruDDR5 4800MHz (1Rx8) RDIMM	BPQE			2		
ThinkSystem RAID 940-8i 4GB Flash PCIe Gen4 12Gb Adapter	BKTL			16		
ThinkSystem 2.5" S4520 960GB Read Intensive SATA 6Gb HS SSD	B8NY			1		
ThinkSystem 2U 8x2.5" SAS/SATA Backplane	BA7H			2		
ThinkSystem Broadcom 57454 10GBASE-T 4-port OCP Ethernet Adapter	B8LU			1		
ThinkSystem Broadcom 57416 10GBASE-T 2-Port PCIe Ethernet Adapter	B5T4			1		
ThinkSystem V3 2U x16/x8/x8 PCIe Gen4 Riser1 or 2	AUKP			2		
ThinkSystem 1100W 230V Titanium Hot-Swap Gen2 Power Supply	BLKL			2		
2.8m, 13A/100-250V, C13 to C14 Jumper Cord	BLKH			2		
ThinkSystem 2U V3 Performance Fan Module	6400			2		
ThinkSystem Toolless Friction Rail v2	BLL6			6		
ThinkSystem 2U V3 EIA Latch Standard	BK7W			1		
ThinkSystem SR650 V3 MB	BQQ2			1		
ThinkSystem 2U V3 EIA right with FIO	BLL0			1		
ThinkSystem 2U Main Air Duct	BQQ6			1		
ThinkSystem SR650 V3 PSU Duct	BP46			1		
ThinkSystem RAID 930/940 SuperCap	BLL3			1		
MS 2FH Riser Filler	AUNP			1		
ThinkSystem 2U MS 3FH Riser 1&2 Cage w/Label1	BC4X			1		
ThinkSystem 2U MS 3FH Riser 1&2 Cage w/ lb2	BPKD			1		
ThinkSystem SR650 V3 Firmware and Root of Trust Security Module	BLLD			1		
3Yr Premier 24x7 4Hr Resp SR650 V3	BM8T			1		
	5WS7B99819	1	1,699	1		1,699
Subtotal					39,324	1,699
Client Software						
Windows Server 2022 Standard Edition (16 Core License)	N/A	2	1,069	3	3,207	
Subtotal					3,207	0
Infrastructure						
Rack - NetBAY S2 42U Rack Cabinet	9307RC4	1	1,565	1	1,565	
0U 36 C13 and 6 C19 Basic 32A 1 Phase PDU	4PU7A93169	1	989	1	989	
ThinkSystem Pref. Pro II USB Keyboard - US English	7ZB7A05522	1	29	1	29	
ThinkSystem Optical Wheel Mouse - USB	7M57A04698	1	39	1	39	
ThinkVision S24i-30 23.8 inch Monitor	63DEKAR3US	1	92	1	92	
1.0m CAT6 Green Cable	00WE127	1	19	4	76	
Essential Service - 3Yr 24x7 4Hr Response (Rack)	41L2760	1	315	1		315
Subtotal					2,790	315
Total					1,834,667	11,284
Dollar Volume Discount (See Note 1)					55.83%	1
Pricing: 1 - Lenovo 1-877-782-7134; 2 - Microsoft						
Note 1: Discount applies to all line items where Pricing=1; pricing is for these or similar quantities. Discounts for similarly sized configurations will be similar to what is quoted here, but may vary based on the specific components priced.						
Benchmark results and test methodology audited by Doug Johnson for InfoSizing, Inc. (www.sizing.com)						
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated Line Items. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed Line Items. For complete details, see the pricing section of the TPC Benchmark Standard. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.						
Three-Year Cost of Ownership USD:						\$1,498,715
TPC-E Throughput:						18,682.14
\$ USD/tpsE:						\$80.23



Lenovo ThinkSystem SR655 V3

TPC-E 1.14.0 TPC Pricing 2.9.0

Report Date: April 29, 2025
Revision Date: April 29, 2025

Availability Date:
April 29, 2025

Numerical Quantities Summary

Reported Throughput:
18,682.14 tpsE

Configured Customers:
9,500,000

Response Time (in seconds)	Minimum	Average	90 Th Percentile	Maximum
Broker-Volume	0.01	0.01	0.02	3.48
Customer-Position	0.01	0.01	0.01	8.29
Market-Feed	0.01	0.01	0.02	11.03
Market-Watch	0.01	0.01	0.01	1.29
Security-Detail	0.01	0.01	0.01	0.42
Trade-Lookup	0.01	0.04	0.06	2.46
Trade-Order	0.01	0.02	0.09	10.95
Trade-Result	0.01	0.01	0.02	11.23
Trade-Status	0.01	0.01	0.01	2.43
Trade-Update	0.01	0.04	0.06	2.44
Data-Maintenance	0.01	0.02	N/A	0.38

Transaction Mix	Transaction Count	Mix %
Broker-Volume	65,906,610	4.900%
Customer-Position	174,853,697	13.000%
Market-Feed	13,451,155	1.000%
Market-Watch	242,105,503	18.000%
Security-Detail	188,304,361	14.000%
Trade-Lookup	107,601,633	8.000%
Trade-Order	135,847,681	10.100%
Trade-Result	134,511,446	10.001%
Trade-Status	255,555,683	19.000%
Trade-Update	26,900,251	2.000%
Data-Maintenance	120	N/A

Test Duration and Timings

Ramp-up Time (hh:mm:ss)	00:36:23
Measurement Interval (hh:mm:ss)	02:00:00
Business Recovery Time (hh:mm:ss)	00:45:11
Total Number of Transactions Completed in Measurement Interval	1,345,038,020

Table of Contents

Abstract	3
Executive Summary	3
Table of Contents	7
Clause 0 – Preamble	9
Introduction.....	9
Goal of the TPC-E Benchmark	9
Restrictions and Limitations	9
Clause 1 – Introduction	11
Benchmark Sponsor	11
Configuration Diagrams.....	11
Measured Configuration.....	11
Figure 1-1. Measured Configuration	11
Priced Configuration	11
Differences between the Priced and Measured Configurations.....	12
Substitution	12
Hardware and Software Configuration Steps.....	12
Clause 2- Database Design, Scaling, and Population	13
Database Creation and Table Definitions	13
Database Physical Organization.....	13
Horizontal/Vertical Partitioning.....	14
Replication	14
Table Attributes	14
Cardinality of Tables.....	14
Table 2-1. Initial Cardinality of Tables	15
Distribution of Tables, Partitions and Logs	16
Table 2-2. Data Distribution for the Measured and Priced Configurations.....	16
Database Interface and Data Model Implemented	17
Database Load Methodology	17
Clause 3 – Transaction Related Items.....	18
Vendor-Supplied Code.....	18
Database Footprint	18
Clause 4 – SUT, Driver, and Network.....	19
Network Configuration	19
Clause 5 – EGen	20
EGen Version.....	20
EGen Code and Modifications.....	20
EGen Files	20
Clause 6 – Performance Metrics and Response Time.....	21

EGen Driver Instances	21
Reported Throughput.....	21
Throughput vs. Elapsed Time for Trade-Result Transaction.....	21
Figure 6-1. Test Run Graph.....	21
Steady State Methodology	22
Work Performed During Steady State	22
Transaction Statistics	22
Table 6-1. Transaction Statistics	23
Clause 7 – Transaction and System Properties	24
Atomicity Requirements	24
Consistency Requirements	24
Isolation Requirements	25
Durability Requirements.....	25
Data Accessibility	25
Table 7-1. Combinations of Durable Media Technologies Tested for Data Accessibility	25
Figure 7-1. Data Accessibility Graph.....	26
Business Recovery	27
Table 7-2. Recovery Times	28
Figure 7-2. Business Recovery Graph.....	28
Clause 8 – Pricing	29
60-Day Space.....	29
Table 8-1. Disk Space Requirements	29
Configuration Components	30
Pricing Methodology	30
Pricing Locale	30
Currency Conversions.....	30
Pricing Calculations.....	30
Total Price.....	31
Availability Date.....	31
Supporting Files Index.....	31
Auditor’s Attestation Letter	31
Appendix A – Price Quotes.....	34

Clause 0 – Preamble

Introduction

TPC Benchmark E (TPC-E) is an On-Line Transaction Processing (OLTP) workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. The database schema, data population, transactions, and implementation rules have been designed to be broadly representative of modern OLTP systems. The benchmark exercises a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- Moderate system and application execution time
- A balanced mixture of disk input/output and processor usage
- Transaction integrity (ACID properties)
- A mixture of uniform and non-uniform data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships with realistic content
- Contention on data access and update

The TPC-E operations are modeled as follows: The database is continuously available 24 hours a day, 7 days a week, for data processing from multiple sessions and data modifications against all tables, except possibly during infrequent (e.g., once a month) maintenance sessions. Due to the worldwide nature of the application modeled by the TPC-E benchmark, any of the transactions may be executed against the database at any time, especially in relation to each other.

Goal of the TPC-E Benchmark

The TPC-E benchmark simulates the OLTP workload of a brokerage firm. The focus of the benchmark is the central database that executes transactions related to the firm's customer accounts. In keeping with the goal of measuring the performance characteristics of the database system, the benchmark does not attempt to measure the complex flow of data between multiple application systems that would exist in a real environment.

The mixture and variety of transactions being executed on the benchmark system is designed to capture the characteristic components of a complex system. Different transaction types are defined to simulate the interactions of the firm with its customers as well as its business partners. Different transaction types have varying run-time requirements.

The benchmark defines:

- Two types of transactions to simulate Consumer-to-Business as well as Business-to-Business activities
- Several transactions for each transaction type
- Different execution profiles for each transaction type
- A specific run-time mix for all defined transactions

For example, the database will simultaneously execute transactions generated by systems that interact with customers along with transactions that are generated by systems that interact with financial markets as well as administrative systems. The benchmark system will interact with a set of driver systems that simulate the various sources of transactions without requiring the benchmark to implement the complex environment.

The performance metric reported by TPC-E is a "business throughput" measure of the number of completed Trade-Result transactions processed per second. Multiple transactions are used to simulate the business activity of processing a trade, and each transaction is subject to a response time constraint. The performance metric for the benchmark is expressed in transactions-per-second-E (tpsE). To be compliant with the TPC-E standard, all references to tpsE results must include the tpsE rate, the associated price-per-tpsE, and the availability date of the priced configuration.

TPC-E uses terminology and metrics that are similar to other benchmarks, originated by the TPC and others. Such similarity in terminology does not imply that TPC-E results are comparable to other benchmarks. The only benchmark results comparable to TPC-E are other TPC-E results that conform to a comparable version of the TPC-E specification.

Restrictions and Limitations

Despite the fact that this benchmark offers a rich environment that represents many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-E approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary because of these and other factors. Therefore, TPC-E should not be used as a substitute for specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Clause 1 – Introduction

Benchmark Sponsor

A statement identifying the benchmark Sponsor(s) and other participating companies must be reported in the Report.

This benchmark was sponsored by Lenovo.


Configuration Diagrams

Diagrams of both Measured and Priced Configurations must be reported in the Report, accompanied by a description of the differences.

Measured Configuration

The measured configuration is shown in Figure 1-1.

Figure 1-1. Measured Configuration

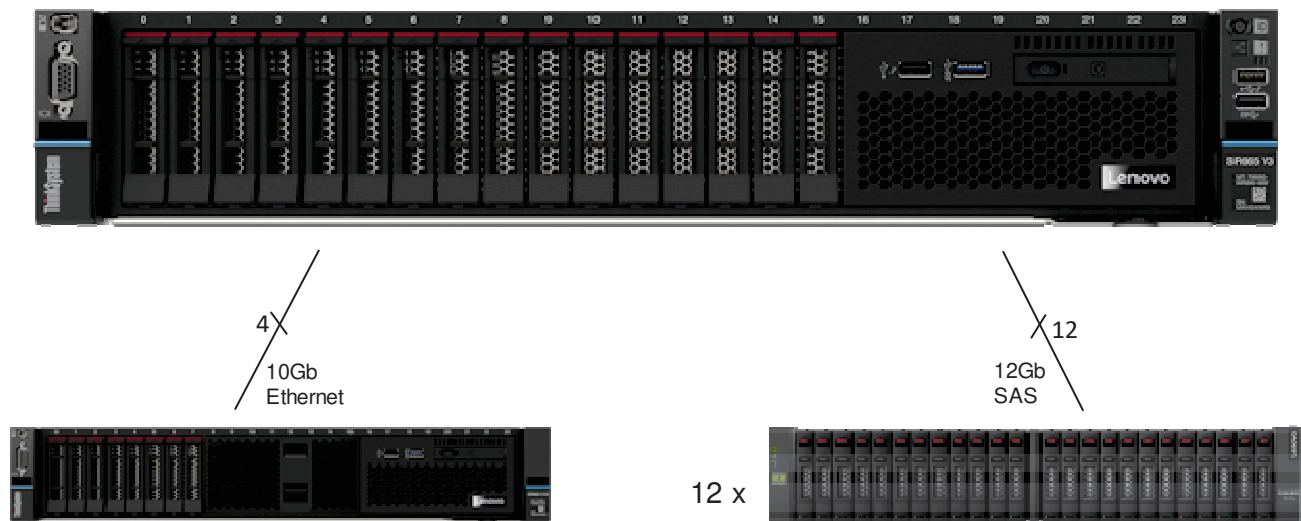

TIER A (Client)	TIER B (Database Server and Storage)	
1 x Lenovo ThinkSystem SR650 V3: <ul style="list-style-type: none"> - 2 x Intel Xeon Gold 6442Y Processors @ 2.60GHz (2 Procs/48 Cores/96 Threads) - 256GB Memory - 2 x 960GB SATA SSD (RAID-1) - 1 x ThinkSystem RAID 940-8i - 1 x Quad 10Gb-T Ethernet - 2 x Dual 10Gb-T Ethernet 	1 x Lenovo ThinkSystem SR655 V3: <ul style="list-style-type: none"> - 1 x AMD EPYC 9845 160-Core Processor @ 2.1GHz - 1536GB Memory - 2 x 480GB SATA SSD (RAID-1) - 8 x 1600GB SAS SSD (RAID-10) - 6 x 3200GB SAS SSD (RAID-5) - 1 x ThinkSystem RAID 940-16i - 6 x ThinkSystem RAID 940-8e - 1 x Quad 10Gb-T Ethernet - 1 x Dual 10Gb-T Ethernet 	12 x Lenovo Storage D1224 DAS Enclosures, with: <ul style="list-style-type: none"> - 144 x 800GB 2.5" SAS SSD (6 x 24-drive RAID-5) - 120 x 1200GB 2.5" 10K SAS (5 x 24-drive RAID-5) - 24 x 1900GB 2.5" SAS SSD (1 x 24-drive RAID-5)
		288 Total External Drives

Priced Configuration

The priced configuration is shown above in the Executive Summary.

Differences between the Priced and Measured Configurations

Compared to the priced configuration, the measured configuration contained six extra external enclosures and drives used strictly for database backup files and flat file space used during the benchmark database load process. These extra enclosures and drives were not used at all during the benchmark runs.

Substitution

Some hardware components of the Priced Configuration may be substituted after the Test Sponsor has demonstrated to the Auditor's satisfaction that the substituting components do not negatively impact the Reported Throughput. All Substitutions must be reported in the Report and noted in the Auditor's Attestation Letter. Any information and/or measurement results used to prove the validity of a Component substitution must be included in the section of the FDR that describes the differences between the Measured Configuration and Priced Configuration. Original and substituted Components must be clearly identified.

No components were substituted.

Hardware and Software Configuration Steps

A description of the steps taken to configure all of the hardware and software must be reported in the Report.

Any and all configuration scripts or step by step GUI instructions are reported in the Supporting Files (see Clauses 9.4.1 and 9.4.1.2). The description, scripts and GUI instructions must be sufficient such that a reader knowledgeable of computer systems and the TPC-E specification could recreate the hardware and software environments.

Detailed instructions for installing and configuring the SUT hardware and software are included in the supporting files:

- Information specific to the Tier A client can be found in:
SupportingFiles\Introduction\TierA\TierA_SR650V3_Setup.pdf
- Information specific to the Tier B database server and storage can be found in:
SupportingFiles\Introduction\TierB\TierB_SR655V3_Setup.pdf

Clause 2- Database Design, Scaling, and Population

Database Creation and Table Definitions

A description of the steps taken to create the database for the Reported Throughput must be reported in the Report. Any and all scripts or step by step GUI instructions are reported in the Supporting Files (see Clause 9.4.2). The description, scripts and GUI instructions must be sufficient such that a reader knowledgeable of database software environments and the TPC-E specification could recreate the database.

The database was created and populated using the Microsoft TPC-E benchmark kit. Instructions for doing so are included in the supporting files. See SupportingFiles\Clause2\MSTPCE Database Setup Reference.pdf.

Changes and customizations were made to some of the kit files. First, the filegroups the database was loaded onto were changed in number from three filegroups to two. Second, several scripts were modified to customize the load to the specific hardware configuration of this SUT.

The default kit files create the database on three filegroups: fixed_fg, scaling_fg, and growing_fg. That was changed so that only two filegroups were used, fixed_fg and growing_fg. All of the items that would have been loaded onto scaling_fg were loaded instead onto fixed_fg.

The modified files are included as part of SupportingFiles\Clause2:

- Utility\Create_TID_Ranges_Table.sql
- DDL\ Create_Indexes_Scaling_Tables.sql
- DDL\ Create_Tables_Scaling.sql

The files that were customized for this specific SUT hardware are included in the folder SupportingFiles\Clause2\9500000.Cust\Database:

- Tempdb_load.sql specifies the tempdb files to use when loading the database
- Tempdb_run.sql specifies the tempdb files to use when running the benchmark
- Shrinktempdb.sql removes tempdb files
- Backupdev.sql creates SQL Server database backup devices
- Dropbackupdev.sql removes those database backup devices
- Backup_Database.sql backs up the tpce database to the specified device names
- Restore_Database.sql restores the tpce database from the specified device names
- Create_Database.sql maps the database filegroups and log to physical storage
- Flatfile.txt defines the locations of the flat files during the database load
- Remove_Database.sql drops the current tpce database

Database Physical Organization

The physical organization of tables and User-Defined Objects, within the database, must be reported in the Report.

The following tables and related indexes were on the growing_fg filegroup:

- CASH_TRANSACTION
- SETTLEMENT
- TRADE
- TRADE_HISTORY
- TRADE_REQUEST
- HOLDING
- HOLDING_HISTORY
- HOLDING_SUMMARY

The remaining tables and their related indexes were all on the fixed_fg filegroup.

Horizontal/Vertical Partitioning

While few restrictions are placed upon horizontal or vertical partitioning of tables and rows in the TPC-E benchmark (see Clause 2.3.3), any such partitioning must be reported in the Report.

Partitioning was not used for this benchmark.

Replication

Replication of tables, if used, must be reported in the Report (see Clause 2.3.4).

Replication was not used for this benchmark.

Table Attributes

Additional and/or duplicated columns in any table must be reported in the Report along with a statement on the impact on performance (see Clause 2.3.5).

No additional attributes were used for this benchmark.

Cardinality of Tables

The cardinality (e.g. the number of rows) of each table, as it existed after database load (see Clause 2.6), must be reported in the Report.

The database was built with 9,500,000 customers. The cardinality is shown in Table 2-1.

Table 2-1. Initial Cardinality of Tables

Table Name	Rows
ACCOUNT_PERMISSION	67,446,648
ADDRESS	14,250,004
BROKER	95,000
CASH_TRANSACTION	151,027,325,350
CHARGE	15
COMMISSION_RATE	240
COMPANY	4,750,000
COMPANY_COMPETITOR	14,250,000
CUSTOMER	9,500,000
CUSTOMER_ACCOUNT	47,500,000
CUSTOMER_TAXRATE	19,000,000
DAILY_MARKET	8,492,287,500
EXCHANGE	4
FINANCIAL	95,000,000
HOLDING	8,404,325,961
HOLDING_HISTORY	220,002,540,796
HOLDING_SUMMARY	472,455,766
INDUSTRY	102
LAST_TRADE	6,507,500
NEWS_ITEM	9,500,000
NEWS_XREF	9,500,000
SECTOR	12
SECURITY	6,507,500
SETTLEMENT	164,160,000,000
STATUS_TYPE	5
TAXRATE	320
TRADE	164,160,000,000
TRADE_HISTORY	393,984,237,265
TRADE_REQUEST	0
TRADE_TYPE	5
WATCH_ITEM	949,883,059
WATCH_LIST	9,500,000
ZIP_CODE	14,741

Distribution of Tables, Partitions and Logs

The distribution of tables, partitions and logs across all media must be explicitly depicted for the Measured and Priced Configurations.

The OS was stored on one RAID-1 array created on two 480GB 2.5" SATA SSDs in the server accessed by the internal ThinkSystem RAID 940-16i SAS/SATA controller. The OS partition was formatted NTFS.

The database log and run-time tempdb were both stored on one RAID-10 array created on eight 1600GB 2.5" SAS SSDs in the server accessed by the internal ThinkSystem RAID 940-16i SAS/SATA controller. This array was broken into three partitions, all NTFS: one for the database log, one for the database MDF, and one for the run-time tempdb files.

The database data was stored on six 24-drive RAID-5 arrays created on 144 800GB 2.5" SAS SSDs in six Lenovo Storage D1224 enclosures, 24 drives each, accessed by six ThinkSystem RAID 940-8e SAS/SATA controllers. Each of these data arrays was broken into three partitions, all NTFS: one for fixed_fg, one for growing_fg, and one for extra space.

The 60-day space requirements were met by including one array created on six 3200GB 2.5" SAS SSDs in the server accessed by the internal ThinkSystem RAID 940-16i SAS/SATA controller. This array was partitioned and formatted NTFS. This array was not used during benchmark runs.

In addition to the priced configuration described above, the measured configuration included additional hardware that was used during the database load process and to hold database backup files. This hardware performed no function during benchmark runs:

- One Lenovo Storage D1224 enclosure holding 24 1900GB 2.5" SAS SSDs, creating one 24-drive RAID-5 array, partitioned in half and formatted NTFS
- Five Lenovo Storage D1224 enclosures each holding 24 1200GB 2.5" 10K SAS HDDs, creating five 24-drive RAID-5 arrays, each partitioned in half and formatted NTFS

Adapter write caching was disabled for all controllers and arrays.

Further details on the storage configuration are available in the supporting files. See the files in the directory SupportingFiles\Introduction\TierB.

Table 2-2 depicts the database configuration of the measured and priced systems to meet the 8-hour steady state requirement.

Table 2-2. Data Distribution for the Measured and Priced Configurations

Disk #	Controller	Drives Enclosure RAID Level (Pricing)	Partition (File System)	Size	Use
0	940-8e #1	24 x 1200GB SAS HDD Lenovo D1224 RAID-5 (Measured)	c:\mp\bk11 (NTFS) c:\mp\bk12 (NTFS)	12,283.14GB 12,283.14GB	Backup & Load Space
1	940-8e #1	24 x 800GB SAS SSD Lenovo D1224 RAID-5	c:\mp\fx1 (NTFS) c:\mp\gw1 (NTFS) c:\mp\xt1 (NTFS)	342.77GB 16,250.00GB 522.11GB	fixed_fg growing_fg Extra Space
2	940-8e #2	24 x 800GB SAS SSD Lenovo D1224 RAID-5	c:\mp\fx2 (NTFS) c:\mp\gw2 (NTFS) c:\mp\xt2 (NTFS)	342.77GB 16,250.00GB 522.11GB	fixed_fg growing_fg Extra Space
3	940-8e #2	24 x 1900GB SAS SSD Lenovo D1224 RAID-5 (Measured)	c:\mp\bk9 (NTFS) c:\mp\bk10 (NTFS)	19,659.28GB 19,659.28GB	Backup & Load Space
4	940-16i	6 x 3200GB SAS SSD internal RAID-5	S: (NTFS)	14,901.14GB	60-day space
5	940-16i	8 x 1600GB SAS SSD internal RAID-10	E: (NTFS) F: (NTFS) T: (NTFS)	4199.22GB 23.44GB 1737.06GB	tpce log MDF tempdb

Disk #	Controller	Drives Enclosure RAID Level (Pricing)	Partition (File System)	Size	Use
6	940-16i	2 x 480GB SATA SSD internal RAID-1	C: (NTFS)	445.38GB	OS
7	940-8e #3	24 x 1200GB SAS HDD Lenovo D1224 RAID-5 (Measured)	c:\mp\bk7 (NTFS) c:\mp\bk8 (NTFS)	12,283.14GB 12,283.14GB	Backup & Load Space
8	940-8e #3	24 x 800GB SAS SSD Lenovo D1224 RAID-5	c:\mp\fx3 (NTFS) c:\mp\gw3 (NTFS) c:\mp\xt3 (NTFS)	342.77GB 16,250.00GB 522.11GB	fixed_fg growing_fg Extra Space
9	940-8e #4	24 x 1200GB SAS HDD Lenovo D1224 RAID-5 (Measured)	c:\mp\bk5 (NTFS) c:\mp\bk6 (NTFS)	12,283.14GB 12,283.14GB	Backup & Load Space
10	940-8e #4	24 x 800GB SAS SSD Lenovo D1224 RAID-5	c:\mp\fx4 (NTFS) c:\mp\gw4 (NTFS) c:\mp\xt4 (NTFS)	342.77GB 16,250.00GB 522.11GB	fixed_fg growing_fg Extra Space
11	940-8e #5	24 x 1200GB SAS HDD Lenovo D1224 RAID-5 (Measured)	c:\mp\bk1 (NTFS) c:\mp\bk2 (NTFS)	12,283.14GB 12,283.14GB	Backup & Load Space
12	940-8e #5	24 x 800GB SAS SSD Lenovo D1224 RAID-5	c:\mp\fx5 (NTFS) c:\mp\gw5 (NTFS) c:\mp\xt5 (NTFS)	342.77GB 16,250.00GB 522.11GB	fixed_fg growing_fg Extra Space
13	940-8e #6	24 x 1200GB SAS HDD Lenovo D1224 RAID-5 (Measured)	c:\mp\bk3 (NTFS) c:\mp\bk4 (NTFS)	12,283.14GB 12,283.14GB	Backup & Load Space
14	940-8e #6	24 x 800GB SAS SSD Lenovo D1224 RAID-5	c:\mp\fx6 (NTFS) c:\mp\gw6 (NTFS) c:\mp\xt6 (NTFS)	342.77GB 16,250.00GB 522.11GB	fixed_fg growing_fg Extra Space

Database Interface and Data Model Implemented

A statement must be provided in the Report that describes:

- The Database Interface (e.g., embedded, call level) and access language (e.g., *SQL*, *COBOL* read/write) used to implement the TPC-E Transactions. If more than one interface / access language is used to implement TPC-E, each interface / access language must be described and a list of which interface /access language is used with which Transaction type must be reported.
- The data model implemented by the DBMS (e.g., relational, network, hierarchical).

Microsoft SQL Server 2022 Enterprise Edition is a relational database. The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C++ code using the Microsoft ODBC interface.

Database Load Methodology

The methodology used to load the database must be reported in the Report.

The database was loaded using the flat files option on the EGenLoader command line. This will generate flat files first, then bulk insert the data into the tables. A further description is provided in SupportingFiles\Clause2\MSTPCE Database Setup Reference.pdf.

Clause 3 – Transaction Related Items

Vendor-Supplied Code

A statement that vendor-supplied code is functionally equivalent to Pseudo-code in the specification (see Clause 3.2.1.6) must be reported in the Report.

The stored procedure code for the transactions was functionally equivalent to the pseudo-code. The stored procedures can be seen in SupportingFiles\Clause3\StoredProcedures.

The code to interface the stored procedures can be found in:

- SupportingFiles\Clause3\BaseServer
- SupportingFiles\Clause3\TransactionsSP
- SupportingFiles\Clause3\TxnHarness

Database Footprint

A statement that the database footprint requirements (as described in Clause 3.3) were met must be reported in the Report.

The database footprint requirements were met.

Clause 4 – SUT, Driver, and Network

Network Configuration

The Network configurations of both the Measured and Priced Configurations must be described and reported in the Report. This includes the mandatory Network between the Driver and Tier A (see Clause 4.2.2) and any optional Database Server interface networks (see Clause 4.1.3.12).

The network configurations of the measured and priced configurations were the same. Refer to Figure 1-1 for a diagram of the network connections.

The Tier A client had eight Ethernet ports. Four of these were provided by the onboard quad-port 10Gb OCP Ethernet solution and the remaining four were provided by two dual-port 10Gb PCI-e Ethernet adapters.

The Tier B database server had six Ethernet ports. Four of these were provided by the onboard quad-port 10Gb OCP Ethernet solution and the remaining two were provided by a dual-port 10Gb PCI-e Ethernet adapter.

The Tier A client and Tier B database server were connected by four 10Gb Ethernet crossover connections. On one side, these cables were plugged into four of the 10Gb ports in the Tier A client, two per 10Gb PCI-e adapter. On the other side, these cables were plugged into two ports of the 10Gb quad-port OCP adapter and both ports of the 10Gb dual-port PCI-e adapter in the Tier B database server. These crossover networks, all running at 10Gb, handled all of the network traffic between Tier A and Tier B while a measurement was underway.

Two crossover connections were setup between the Tier A client and the Driver. On the client, these cables were both plugged into two ports of the 10Gb quad-port OCP adapter. These networks, which fulfill the mandatory network between the Driver and Tier A, were used by the client to report its results to the Driver as a benchmark run was underway.

Another network connected the Driver, the Tier B database server, the Tier A client, and a time server. This network, which was connected via a Gb Ethernet switch, used one of the onboard Ethernet ports on the Tier A client and on the Tier B database server. It was used for miscellaneous file sharing and time syncing. It was not used during benchmark runs.

Clause 5 – EGen

EGen Version

The version of EGen used in the benchmark must be reported in the Report (see Clause 5.3.1).

EGen v1.14.0 was used in the benchmark.

EGen Code and Modifications

A statement that all required TPC-provided EGen code was used in the benchmark must be reported in the Report.

If the Test Sponsor modified EGen, a statement EGen has been modified must be reported in the Report. All formal waivers from the TPC documenting the allowed changes to EGen must also be reported in the Report (see Clause 5.3.7.1). If any of the changes to EGen do not have a formal waiver that must also be reported in the Report.

If the Test Sponsor extended EGenLoader (as described in Appendix A.6), the use of the extended EGenLoader and the audit of the extension code by an Auditor must be reported in the Report (see Clause 5.7.4).

All required TPC-provided EGen code was used in the benchmark.

EGen was not modified for this benchmark.

EGenLoader was not extended for this benchmark.

EGen Files

The make/project files used to compile/link EGenLoader and EGenValidate must be reported in the Supporting Files. The compiler/linker options and flags used to compile/link EGen Objects for the SUT must be reported in the Supporting Files.

See the supporting files directory SupportingFiles\Clause3\prj for the files related to EGenLoader and EGenValidate.

See the supporting files directory SupportingFiles\Clause3\SUT_CE_Server for the files related to the SUT_CE_Server.

See the supporting files directory SupportingFiles\Clause3\SUT_MEE_Server for the files related to the SUT_MEE_Server.

Clause 6 – Performance Metrics and Response Time

EGen Driver Instances

The number of EGenDriverMEE and EGenDriverCE instances used in the benchmark must be reported in the Report (see Clause 6.2.5).

There were 20 EGenDriverCEs with a total of 1700 EGenDriverCE instances used in the benchmark.

There were 20 EGenDriverMEEs with a dynamic number of instances used in the benchmark.

Reported Throughput


The Reported Throughput must be reported in the Report (see Clause 6.7.1.2).

The Reported Throughput was 18,682.14 tpsE.

Throughput vs. Elapsed Time for Trade-Result Transaction

A Test Run Graph of throughput versus elapsed wall clock time must be reported in the Report for the Trade-Result Transaction (see Clause 6.7.2).

Figure 6-1. Test Run Graph

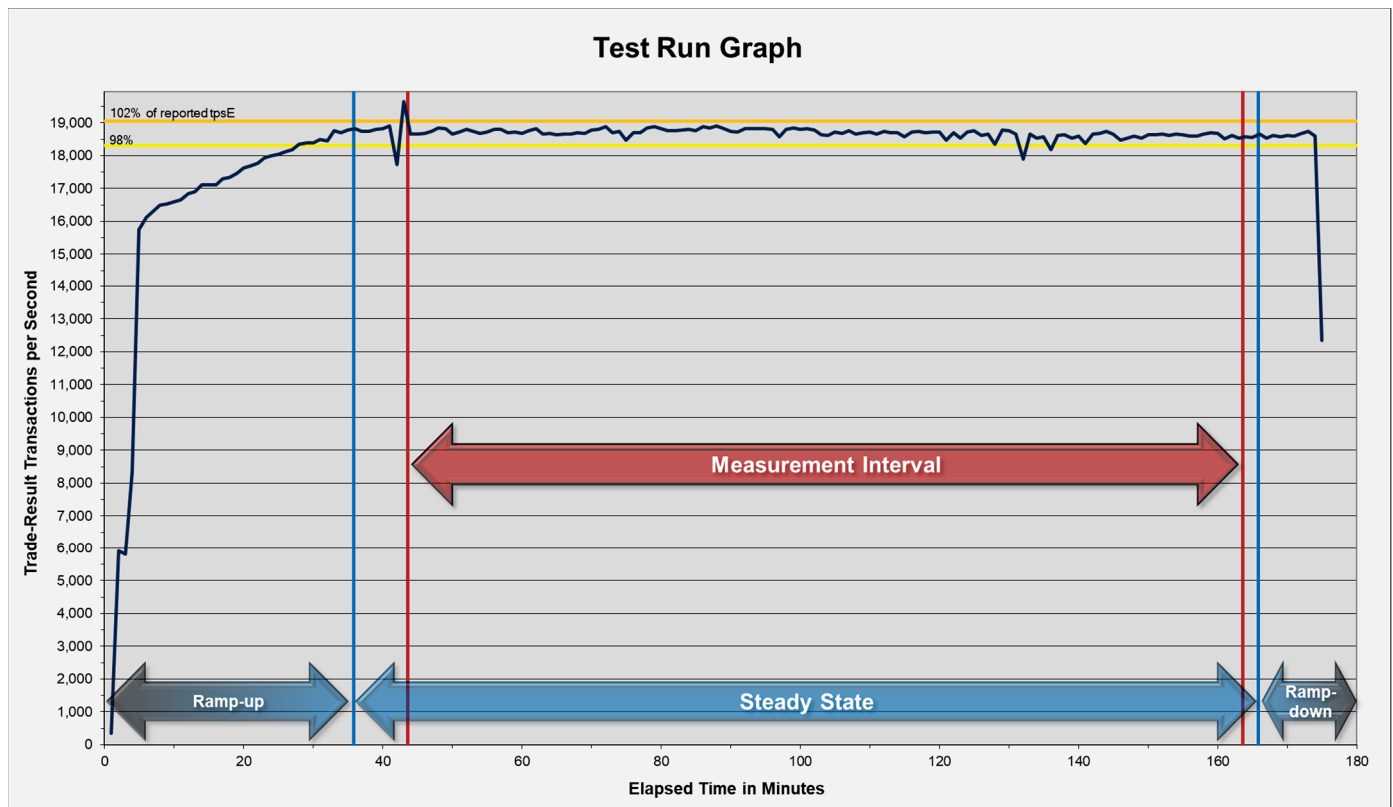

Steady State Methodology

The method used to determine that the SUT had reached a Steady State prior to commencing the Measurement Interval must be reported in the Report.

During the run, Steady State was determined by observation of the Trade-Result transactions per second. After the run, Steady State was confirmed by:

1. Looking at the Test Run Graph and verifying that the Trade-Result transactions per second was steady prior to commencing the Measurement Interval.
2. Calculating the average Trade-Result transactions per second over 60-minute windows during Steady State, with the start of each window 10 minutes apart. Then it was confirmed that the minimum 60-minute average Trade-Result transactions per second was not less than 98% of the Reported Throughput, and that the maximum 60-minute average Trade-Result transactions per second was not greater than 102% of the Reported Throughput.
3. Calculating the average Trade-Result transactions per second over 10-minute windows during Steady State, with the start of each window 1 minute apart. Then it was confirmed that the minimum 10-minute average Trade-Result transactions per second was not less than 80% of the Reported Throughput, and the maximum 10-minute average Trade-Result transactions per second was not greater than 120% of the Reported Throughput.

Work Performed During Steady State

A description of how the work normally performed during a Test Run, actually occurred during the Measurement Interval must be reported in the Report (for example checkpointing, writing Undo/Redo Log records, etc.).

Checkpoints had a duration of 430 seconds and were scheduled to run every 447 seconds.

Data-Maintenance was run every 60 seconds.

Transaction Statistics

The recorded averages over the Measurement Interval for each of the Transaction input parameters specified by clause 6.4.1 must be reported in the Report.

Table 6-1 contains the transaction statistics.

Table 6-1. Transaction Statistics

Input Parameter	Value	Actual Percentage	Required Range
Customer-Position			
By Tax ID	1	50.00%	48% to 52%
Get History	1	50.00%	48% to 52%
Market-Watch			
Securities chosen by	Watch List	60.00%	57% to 63%
	Account ID	35.00%	33% to 37%
	Industry	5.00%	4.5% to 5.5%
Security-Detail			
Access LOB	1	1.00%	0.9% to 1.1%
Trade-Lookup			
Frame to execute	1	30.00%	28.5% to 31.5%
	2	30.00%	28.5% to 31.5%
	3	30.00%	28.5% to 31.5%
	4	10.00%	9.5% to 10.5%
Trade-Order			
Transactions requested by a third party		10.00%	9.5% to 10.5%
By Company Name		40.00%	38% to 42%
Buy On Margin	1	8.00%	7.5% to 8.5%
Rollback	1	0.99%	0.94% to 1.04%
LIFO	1	35.00%	33% to 37%
Trade Quantity	100	25.00%	24% to 26%
	200	25.00%	24% to 26%
	400	25.00%	24% to 26%
	800	25.00%	24% to 26%
Trade Type	Market Buy	29.99%	29.7% to 30.3%
	Market Sell	30.00%	29.7% to 30.3%
	Limit Buy	20.00%	19.8% to 20.2%
	Limit Sell	10.00%	9.9% to 10.1%
	Stop Loss	10.01%	9.9% to 10.1%
Trade-Update			
Frame to execute	1	33.00%	31% to 35%
	2	32.99%	31% to 35%
	3	34.01%	32% to 36%

Clause 7 – Transaction and System Properties

The ACID (Atomicity, Consistency, Isolation, and Durability) properties of transaction processing systems must be supported by the System Under Test during the running of this benchmark. It is the intent of this section to define the ACID properties informally and to specify a series of tests that must be performed to demonstrate that these properties are met.

The results of the ACID tests must be reported in the Report along with a description of how the ACID requirements were met, and how the ACID tests were run.

Atomicity Requirements

The System Under Test must guarantee that Database Transactions are atomic; the system will either perform all individual operations on the data, or will ensure that no partially completed operations leave any effects on the data.

All ACID tests were conducted according to specification. The following steps were performed to verify the Atomicity of the Trade-Order transactions:

- *Perform a market Trade-Order Transaction with the roll_it_back flag set to 0. Verify that the appropriate rows have been inserted in the TRADE and TRADE_HISTORY tables.*
- *Perform a market Trade-Order Transaction with the roll_it_back flag set to 1. Verify that no rows associated with the rolled back Trade-Order have been added to the TRADE and TRADE_HISTORY tables.*

The procedure for running the atomicity tests is documented in the file SupportingFiles\Clause7\MSTPCE ACID Procedures.pdf.

The atomicity scripts and outputs are located in the directory SupportingFiles\Clause7\Atomicity.

Consistency Requirements

Consistency is the property of the Application that requires any execution of a Database Transaction to take the database from one consistent state to another. A TPC-E database when first populated by EGenLoader must meet these consistency conditions.

These three consistency conditions must be tested after initial database population and after any Business Recovery tests.

Consistency condition 1

Entries in the BROKER and TRADE tables must satisfy the relationship:

$B_NUM_TRADES = count()$*

For each broker defined by:

$(B_ID = CA_B_ID)$ and $(CA_ID = T_CA_ID)$ and $(T_ST_ID = "CMPT")$.

Consistency condition 2

Entries in the BROKER and TRADE tables must satisfy the relationship:

$B_COMM_TOTAL = sum(T_COMM)$

For each broker defined by:

$(B_ID = CA_B_ID)$ and $(CA_ID = T_CA_ID)$ and $(T_ST_ID = "CMPT")$.

Consistency condition 3

Entries in the HOLDING_SUMMARY and HOLDING tables must satisfy the relationship:

$HS_QTY = sum(H_QTY)$

For each holding summary defined by:

$(HS_CA_ID = H_CA_ID)$ and $(HS_S_SYMB = H_S_SYMB)$.

Consistency conditions 1, 2, and 3 were tested using a batch file to issue queries to the database after the database was loaded and after the Business Recovery Test. The results of the queries demonstrated that the database was consistent for all three tests.

The procedure for running the consistency tests is documented in the file SupportingFiles\Clause7\MSTPCE ACID Procedures.pdf.

The consistency scripts and outputs are located in the directory SupportingFiles\Clause7\Consistency.

Isolation Requirements

The isolation property of a Transaction is the level to which it is isolated from the actions of other concurrently executing Transactions.

Systems that implement Transaction isolation using a locking and/or versioning scheme must demonstrate compliance with the isolation requirements by executing the tests described in Clause 7.4.2. These isolation tests are designed to verify that the configuration and implementation of the System Under Test provides the Transactions with the required isolation levels defined in Clause 7.4.1.3.

Isolation tests 1 through 4 were successfully done following the procedure documented in the file SupportingFiles\Clause7\MSTPCE ACID Procedures.pdf.

The isolation scripts and outputs are located in the directory SupportingFiles\Clause7\Isolation.

Durability Requirements

The SUT must provide Durability. In general, state that persists across failures is said to be Durable and an implementation that ensures state persists across failures is said to provide Durability. In the context of the benchmark, Durability is more tightly defined as the SUT’s ability to ensure all Committed data persist across any Single Point of Failure.

Data Accessibility

The System Under Test must be configured to satisfy the requirements for Data Accessibility. Data Accessibility is demonstrated by the SUT being able to maintain database operations with full data access after the permanent irrecoverable failures of any single Durable Medium containing database tables, recovery log data, or Database Metadata. Data Accessibility tests are conducted by inducing failures of Durable Media within the SUT. The failures of Clause 7.6.3 test the ability of the SUT to maintain access to the data. The specific failures addressed in Clause 7.6.3 are defined sufficiently significant to justify demonstration of Data Accessibility across such failures. However, the limited nature of the tests listed must not be interpreted to allow other unrecoverable single points of failure.

The Test Sponsor must report in the Report the Redundancy Level (see Clause 7.6.3.4) and describe the Data Accessibility test(s) used to demonstrate compliance. A list of all combinations of Durable Media technologies tested in Clause 7.6.3.5 must be reported in the Report.

A Data Accessibility Graph for each run demonstrating a Redundancy Level must be reported in the Report (see Clause 7.6.4.2).

This benchmark result used Redundancy Level 1. The test for Redundancy Level 1 is the test for permanent irrecoverable failure of any single Durable Medium.

The combinations of Durable Media technologies that were tested are shown in table 7-1. All unique combinations that contained database data, the database log, and/or the tempdb database were tested.

Table 7-1. Combinations of Durable Media Technologies Tested for Data Accessibility

Contents	Durable Media Type	Bus Type	Array Redundancy	Controller
Database Data	SSD	SAS	RAID-5	940-8e
Database Log & tempdb	SSD	SAS	RAID-10	940-16i

To prove Redundancy Level 1, the following steps were successfully performed:


1. Restored the database to its freshly-loaded, proven-consistent state.
2. Determined the current number of completed trades in the database, *count1*.
3. Started a run, using the profile from the measured run, with checkpoints, and met the Data Accessibility Throughput Requirements for at least 5 minutes.
4. Induced the first failure, which in this case was failing a drive in the array containing the database log and tempdb by

physically removing it from the server. Since the array was RAID protected, transaction processing continued.

5. Waited until the Data Accessibility Throughput Requirements were met again for at least 5 minutes.
6. Induced the second failure, which in this case was failing a drive in a database data array by physically removing it from its enclosure. Since the database data array was RAID protected, transaction processing continued.
7. After a few minutes passed, a new drive was inserted into the data enclosure to replace the failed data drive. The array rebuilding process was started.
8. After a few minutes passed, a new drive was inserted into the server to replace the failed log/tempdb drive. The array rebuilding process was started.
9. Continued running the benchmark for at least 20 minutes.
10. Terminated the run gracefully.
11. Retrieved the new number of completed trades in the database by running `select count(*) as count2 from SETTLEMENT`.
12. Verified that $(count2 - count1)$, which is the number of actual completed Trade-Result Transactions done during the run, equaled the number of successful Trade-Result transactions reported by the Driver.
13. Allowed the recovery process to complete.

Figure 7-1 is a graph of the measured throughput versus elapsed time for Data Accessibility. The timings of the induced failures as well as the recovery process are indicated.

Figure 7-1. Data Accessibility Graph

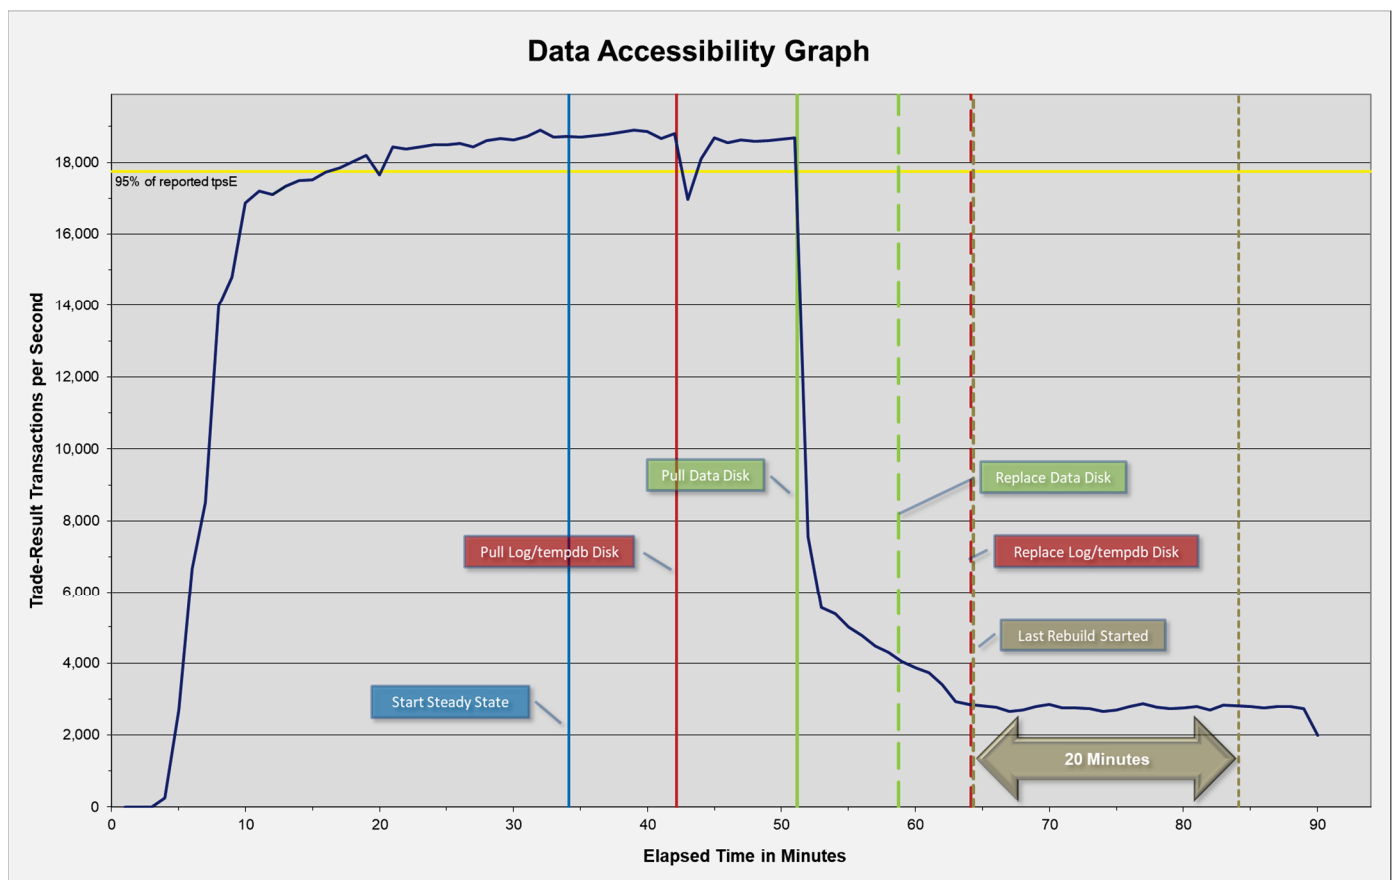

The files related to this data accessibility test are located in SupportingFiles\Clause7\Durability\DataAccessibility.

Business Recovery

Business Recovery is the process of recovering from a Single Point of Failure and reaching a point where the business meets certain operational criteria.

The Test Sponsor must describe in the Report the test(s) used to demonstrate Business Recovery.

The Business Recovery Time must be reported on the Executive Summary Statement and in the Report. If the failures described in Clauses 7.5.3.1, 7.5.3.2 and 7.5.3.3 were not combined into one Durability test (usually powering off the Database Server during the run), then the Business Recovery Time for the failure described for instantaneous interruption is the Business Recovery Time that must be reported in the Executive Summary Statement. All the Business Recovery Times for each test requiring Business Recovery must be reported in the Report.

The Business Recovery Time Graph (see Clause 7.5.8.2) must be reported in the Report for all Business Recovery tests.

The tests for “Loss of Processing,” “Loss of Vulnerable Storage Component,” and “Loss of all External Power to the SUT” were combined.

The following steps were successfully performed to test Business Recovery:

1. Restored the database to its freshly-loaded, proven-consistent state.
2. Determined the current number of completed trades in the database, *count1*.
3. Started a run, using the profile from the measured run, with checkpoints, and met the Durability Throughput Requirements for at least 20 minutes.
4. Pulled the power cords from the database server, causing it to immediately cease functioning. All the contents of the server’s main memory and caches were lost. All the disk controllers were inside the server, and none of their batteries were present, so all disk controller cache contents were lost.
5. Stopped submitting Transactions.
6. Plugged in and restarted the database server. It booted a fresh copy of the OS from the OS array.
7. Deleted all of the data and log files for tempdb.
8. Started SQL Server on the database server. It automatically began recovery of the tpce database. The timestamp in the SQL Server ERRORLOG of the first message related to database tpce is considered the start of Database Recovery.
9. Waited for SQL Server to finish recovering the database. The timestamp in the SQL Server ERRORLOG of the message indicating “Recovery is complete” is considered the end of Database Recovery.
10. Since there was a time gap between the end of Database Recovery and the start of Application Recovery, and the Drivers and Transactions needed to be started again (not just continued), the Trade-Cleanup Transaction was executed during this time gap.
11. Started a run, using the profile from the measured run, with checkpoints. The time when the first transaction is submitted to the database is considered the start of Application Recovery.
12. Let the run proceed until a 20-minute window existed such that the first minute of the window and the entire window both scored at least 95% of the Reported Throughput. The time of the beginning of that 20-minute window is considered the end of Application Recovery.
13. Terminated the run gracefully.
14. Verified that no errors were reported during steps 8 through 13.
15. Retrieved the new number of completed trades in the database by running *select count(*) as count2 from SETTLEMENT*.
16. Verified that (*count2 – count1*), which is the number of actual completed Trade-Result Transactions done during the two runs, was greater than or equal to the combined number of successful Trade-Result Transactions reported by the Driver for both runs. In the case of an inequality, verified that the difference was less than or equal to the maximum number of transactions that could be simultaneously in-flight from the Driver to the SUT.
17. Verified database consistency.


The recovery times are shown in Table 7-2. The Business Recovery Time is the sum of the Database Recovery Time and the Application Recovery Time.

Table 7-2. Recovery Times

Recovery Process	Time
Database Recovery	00:24:06
Application Recovery	00:21:05
Business Recovery	00:45:11

Figure 7-2 is a graph of the measured throughput versus elapsed time for Business Recovery.

Figure 7-2. Business Recovery Graph

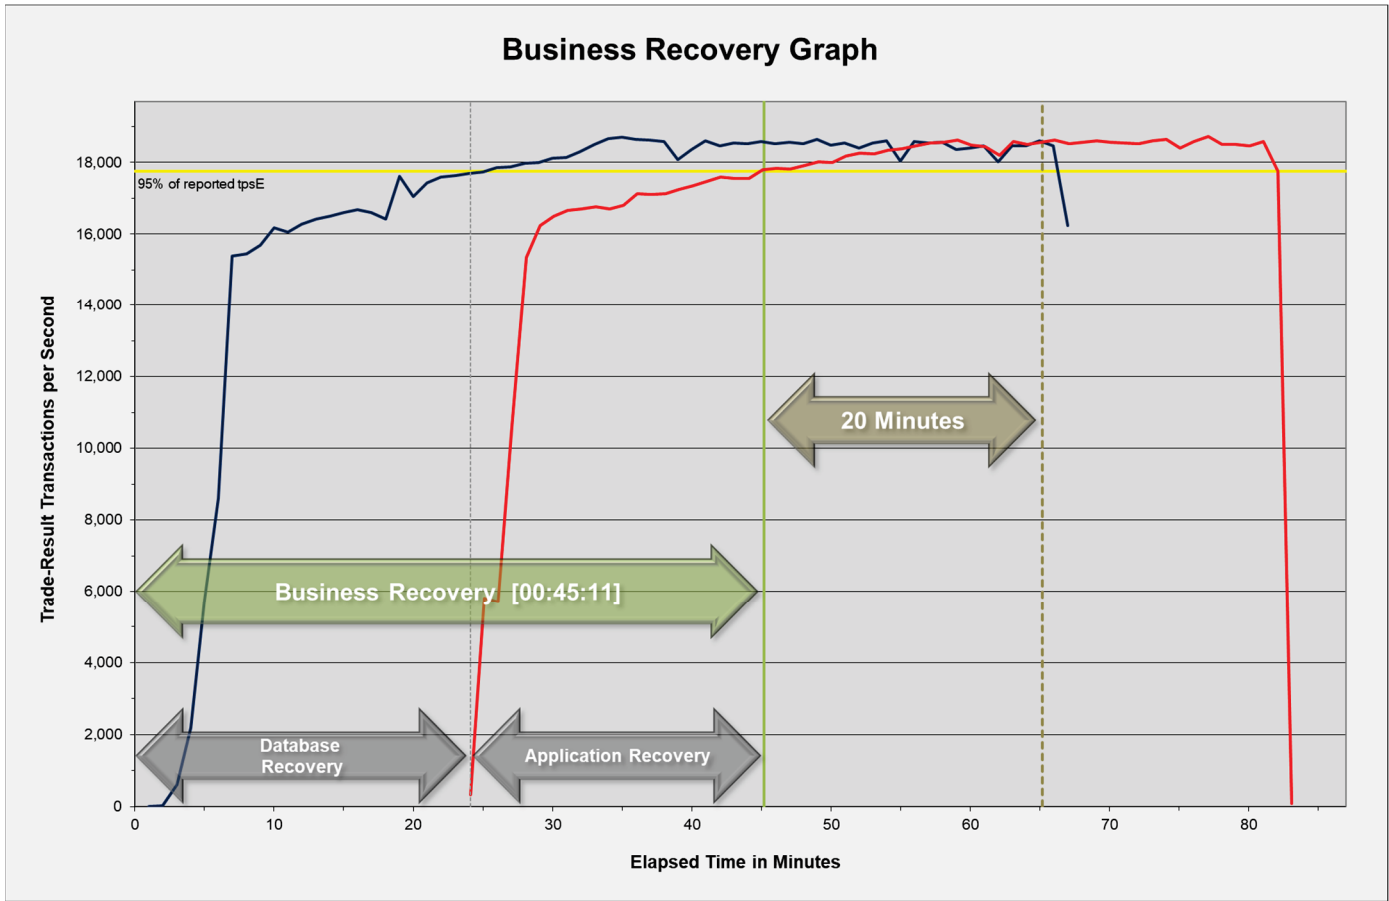

The files related to this business recovery test are located in SupportingFiles\Clause7\Durability\BusinessRecovery.

Clause 8 – Pricing

60-Day Space

Details of the 60-Day Space computations (see Clause 6.6.6.6) along with proof that the database is configured to sustain a Business Day of growth (see Clause 6.6.6.1) must be reported in the Report.

The 60-day space calculations shown in Table 8-1 are included in SupportingFiles\Clause8\tpce_space.xls.

Table 8-1. Disk Space Requirements

Customers	9,500,000	Measured Throughput			18,682.14	Trade-Results/s		Reported Throughput		18,682.14	tpsE	
Table	Initial Rows	Data Size (KB)	Index Size (KB)	Extra 5% (KB)	Total + 5% (KB)	Rows After	After Run (KB)	Growth (KB)	Bus. Day Growth (KB)	Req. Add. (KB)		
BROKER	95,000	7,696	14,048	1,087	22,831	95,000	21,744	-	-	1,087		
CASH_TRANSACTION	151,027,325,350	15,742,887,856	33,181,120	788,803,449	16,564,872,425	151,246,021,121	15,816,797,976	40,729,000	92,188,536	92,188,536		
CHARGE	15	8	8	1	17	15	16	-	-	1		
COMMISSION_RATE	240	16	56	4	76	240	72	-	-	4		
SETTLEMENT	164,160,000,000	7,827,784,632	16,524,392	392,215,451	8,236,524,475	164,397,709,173	7,867,067,224	22,758,200	51,512,317	51,512,317		
TRADE	164,160,000,000	19,612,158,864	10,969,818,664	1,529,098,876	32,111,076,404	164,399,900,877	30,692,612,072	110,634,544	250,417,064	250,417,064		
TRADE_HISTORY	393,984,237,265	11,849,150,832	30,894,624	594,002,273	12,474,047,729	394,560,013,839	11,920,573,000	40,527,544	91,732,548	91,732,548		
TRADE_REQUEST	-	-	-	-	-	-	-	-	-	-		
TRADE_TYPE	5	8	1,032	52	1,092	5	1,040	-	-	52		
ACCOUNT_PERMISSION	67,446,648	3,713,368	20,424	186,690	3,920,482	67,446,648	3,733,912	120	272	186,690		
CUSTOMER	9,500,000	1,556,248	456,560	100,640	2,113,448	9,500,000	2,012,896	88	200	100,640		
CUSTOMER_ACCOUNT	47,500,000	4,303,744	1,052,968	267,836	5,624,548	47,500,000	5,356,712	-	-	267,836		
CUSTOMER_TAXRATE	19,000,000	395,640	3,768	19,970	419,378	19,000,000	399,608	200	453	19,970		
HOLDING	8,404,325,961	565,437,880	387,316,648	47,637,726	1,000,392,254	8,410,349,998	966,798,368	14,043,840	31,787,696	31,787,696		
HOLDING_HISTORY	220,002,540,796	8,000,093,200	5,344,366,152	667,222,968	14,011,682,320	220,323,093,007	13,392,661,160	48,201,808	109,102,951	109,102,951		
HOLDING_SUMMARY	472,455,766	20,922,824	78,840	1,050,083	22,051,747	472,458,862	21,001,664	-	-	-		
WATCH_ITEM	949,883,059	26,982,136	100,616	1,354,138	28,436,890	949,883,059	27,083,088	336	761	1,354,138		
WATCH_LIST	9,500,000	236,064	214,672	22,537	473,273	9,500,000	450,736	-	-	22,537		
COMPANY	4,750,000	1,014,408	303,096	65,875	1,383,379	4,750,000	1,317,528	24	55	65,875		
COMPANY_COMPETITOR	14,250,000	382,040	347,232	36,464	765,736	14,250,000	729,272	-	-	36,464		
DAILY_MARKET	8,492,287,500	401,247,832	1,187,992	20,121,791	422,557,615	8,492,287,500	402,437,504	1,680	3,803	20,121,791		
EXCHANGE	4	8	8	1	17	4	16	-	-	1		
FINANCIAL	95,000,000	10,712,160	31,672	537,192	11,281,024	95,000,000	10,744,160	328	743	537,192		
INDUSTRY	102	8	24	2	34	102	32	-	-	2		
LAST_TRADE	6,507,500	407,776	3,480	20,563	431,819	6,507,500	411,256	-	-	20,563		
NEWS_ITEM	9,500,000	1,029,973,520	12,176	51,499,285	1,081,484,981	9,500,000	1,029,985,696	-	-	51,499,285		
NEWS_XREF	9,500,000	236,056	3,696	11,988	251,740	9,500,000	239,752	-	-	11,988		
SECTOR	12	8	24	2	34	12	32	-	-	2		
SECURITY	6,507,500	905,320	252,816	57,907	1,216,043	6,507,500	1,158,160	24	55	57,907		
STATUS_TYPE	5	8	8	1	17	5	16	-	-	1		
ADDRESS	14,250,004	821,280	4,784	41,303	867,367	14,250,004	826,160	96	218	41,303		
TAXRATE	320	24	56	4	84	320	96	16	37	37		
ZIP_CODE	14,741	488	104	30	622	14,741	592	-	-	30		
TOTALS (KB)		65,101,331,952	16,786,191,760	4,094,376,186	85,981,899,898		82,164,421,560	276,897,848	626,747,709	701,086,504		
Initial Database Size (MB)		79,968,285	78,094 GB									
Database Filegroups	LUN Count	Partition Size (MB)	MB Allocated	MB Loaded	MB Required	OK						
	0	-	-	-	-							
growing_fg	6	16,625,700	99,754,200	78,516,227	79,128,279							
	0	-	-	-	-							
fixed_fg	6	349,700	2,098,200	1,452,058	1,524,661	OK						
Settlements		237,709,173										
Data Space Required (MB)		Data Space Configured (MB)					Log Space Required (MB)		Log Space Configured (MB)			
Initial Growing Space	78,516,227	Data LUNS	6	1	-	-	Initial Log Size	48,876	Log LUNS	1		
Final Growing Space	78,786,632	Disks per LUN	24	6	-	-	Final Log Size	1,827,911	Log Disks	8		
Delta	270,405	Disk Capacity	761,984	3,051,356	-	-	Log Growth	1,779,035	Disk Capacity	1,524,630		
Data Space per Trade	0.001137546	RAID Overhead	95.83%	83%	0%	0%	Log Growth/Trade	0.007484080	RAID Overhead	50%		
1 Day Data Growth	612,052	Space	105,153,792	15,256,781	-	-	1 Day Log Space	4,075,653	Log Space	6,098,518		
60 Day Space	116,691,397	Total Space				120,410,573						
OK												
OK												

Configuration Components

A detailed list of hardware, software, and/or Licensed Compute Services used in the Priced Configuration must be reported. The listing for each separately Orderable item must have: vendor Part Number, description and applicable release/revision level, Pricing Source, List Price including the ISO Currency Code, quantity, extended price including the ISO Currency Code, applicable Discounted price including the ISO Currency Code, 3-year maintenance price including the ISO Currency Code. If package-pricing is used, the vendor Part Number of the package and a description uniquely identifying each of the Components of the package must be disclosed to a sufficient level of detail to meet the requirements of Clause 5.2.

A detailed list of all hardware, software, and maintenance is provided in the Executive Summary at the front of this report. Price quotations are included in Appendix A.

Pricing Methodology

If the Benchmark Standard does not specify the allowed Pricing Methodology, then the Default Pricing Methodology will apply. The price of the entire Priced Configuration must be used, including all hardware (purchase price), software (license charges), Licensed Compute Services, and hardware maintenance/Software Maintenance Update charges over a period of 3 years (36 months).

The default 3-year Pricing Methodology was used.

Pricing Locale

The Priced Locale and Priced Currency of the Priced Configuration must be disclosed. All Line Items of the system must be Generally Available in the Priced Locale by the Availability Date.

The configuration was priced in \$USD for the United States of America.

Currency Conversions

The date, rate(s), and source of any Currency Conversions must be reported. Documentation of all Currency Conversions from the Currency Conversion Source, including the date of the conversion, must be included in the FDR.

No currency conversions were done.

Pricing Calculations

The following items must be included in the Full Disclosure Report and Executive Summary:

- *the benchmark performance metric*
- *respective calculations for the Pricing Methodology pricing time period (See Clauses 1.7 through 1.10)*
- *price/performance*
- *Availability Date*

Pricing may use packages and Discounts that are Generally Available (see Clause 1.5). The priced items over which a Discount applies must be specified (see Clause 5.1.2). The percentage, amount, and basis (including type and justification) of all allowed Discounts listed must be disclosed (see Clause 5.1.2).

The benchmark performance metric, pricing calculations, discount information, price/performance, and Availability Date are all included in the Executive Summary at the front of this report.

Total Price

The Total Price, including the ISO Currency Code, of the entire Priced Configuration and the Price/Performance metric must be reported.

The Total Price and Price/Performance are both included in the Executive Summary at the front of this report.

Availability Date

The committed Availability Date of Line Items used in the price calculations must be reported. The Availability Date must be reported on the first page of the Executive Summary and with a precision of one day. When the priced system includes products and/or Licensed Compute Services with different Availability Dates, the reported Availability Date for the priced system must be a date at which all Line Items are committed to be Generally Available. Each Line Item used in the Priced Configuration is considered to be Available on the Availability Date unless an earlier date is specified.

For each of the Line Items that are not Orderable on the report date of the FDR, the following information must be included in the FDR:

- *Name and Part Number of the item that is not Orderable*
- *The date when the Line Item can be ordered (on or before the Availability Date)*
- *The method to be used to order the Component (at or below the quoted price) when the order date arrives*
- *The method for verifying the price*

The total solution as priced will be generally available April 29, 2025.

Supporting Files Index

An index for all files required by Clause 9.4 Supporting Files must be provided in the Report.

An index of the files contained in the supporting files is here: SupportingFiles\SupportingFilesIndex.pdf

Auditor's Attestation Letter

The Auditor's Attestation Letter, which indicates compliance, must be included in the Report.

The auditor's Attestation Letter is on the next two pages.

Danny Zhang
Performance Development Manager
7001 Development Drive
Morrisville, NC 27560

April 29, 2025

I verified the TPC Benchmark™ E v 1.14.0 performance of the following configuration:

Platform: 1x Lenovo® ThinkSystem™ SR655 V3
Operating System: Microsoft® Windows Server® 2022 Standard Edition
Database Manager: Microsoft SQL Server® 2022 Enterprise Edition

The results were:

Performance Metric **18,682.14 tpsE**
Trade-Result 90th %-tile 0.02 Seconds

Tier B (Server)

Lenovo ThinkSystem SR655 V3

CPUs	1x AMD EPYC 9845 160-Core Processor @ 2.1 GHz		
Memory	1,536 GiB		
Storage	Qty	Size	Type
	2	480 GB	SATA SSD (RAID-1)
	8	1600 GB	SAS SSD (RAID-10)
	6	3200 GB	SAS SSD (RAID-5)
	144	800 GB	SAS SSD (6x24-drive RAID-5)

Tier A (Client)

Lenovo ThinkSystem SR650 V3

CPUs	2x Intel Xeon Gold 6442Y Processors @ 2.60 GHz
Memory	256 GiB
Storage	2x 960 GB SATA SSD (RAID-1)

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

The following verification items were given special attention:

- All EGen components were verified to be v 1.14.0.
- The transactions were correctly implemented.

- The database was properly scaled and populated for 9,500,000 customers.
- The mandatory network between the driver and the SUT was configured.
- The ACID properties were met.
- Input data was generated according to the specified percentages.
- The reported response times were correctly measured.
- All 90th percentile response times were below the specified maximums.
- The measurement interval was 120 minutes.
- The implementation used Redundancy Level 1.
- The Business Recovery Time of 00:45:11 was correctly measured.
- The 60-day storage requirement was correctly computed.
- The system pricing was verified for major components and maintenance.

Additional Audit Notes:

None.

Respectfully Yours,

A handwritten signature in black ink, reading "Doug Johnson". The signature is fluid and cursive, with a long horizontal line extending from the end of the name.

Doug Johnson, Certified TPC Auditor

Appendix A – Price Quotes

Written price quotations from all Third Party Pricing Sources must be included as the final appendix in the FDR.

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>

Microsoft
April 29, 2025

Lenovo Corporation
Ray Engler
7001 Development Drive
Morrisville, NC 27560

Here is the information you requested regarding pricing for Microsoft products to be used in conjunction with your TPC-E benchmark testing.

All pricing is shown in US Dollars (\$).

Description	Unit Price	Quantity	Price
Database Management System			
SQL Server 2022 Enterprise Edition <i>2 Core License</i> <i>Open Program – No Level - ERP</i>	\$15,123.00	80	\$1,209,840.00
Database Server Operating System			
Windows Server 2022 Standard <i>16 Core License</i> <i>Open Program – No Level - ERP</i>	\$1,069.00	10	\$10,690.00
Tier-A Operating System(s)			
Windows Server 2022 Standard <i>16 Core License</i> <i>Open Program – No Level -ERP</i>	\$1,069.00	3	\$3,207.00
Support			
Microsoft Problem Resolution Services <i>Professional Support</i> <i>(1 Incident).</i>	\$259.00	1	\$259.00

All Microsoft software components are currently orderable and available. A list Of Microsoft's resellers can be found in the Microsoft Product Information Center at <http://www.microsoft.com/products/info/render.aspx?view=22&type=how>

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident-by-incident basis at \$259 Call.

This quote is valid for the next 120 days.

Reference ID: TPCE_fwqpkkb535402550_2025